
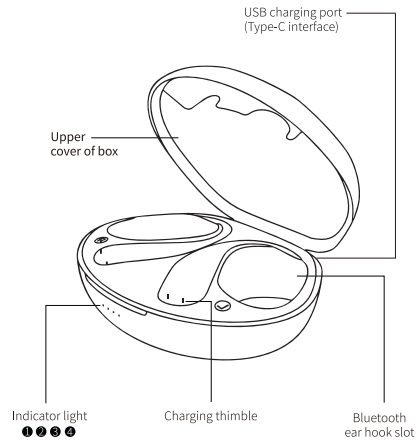
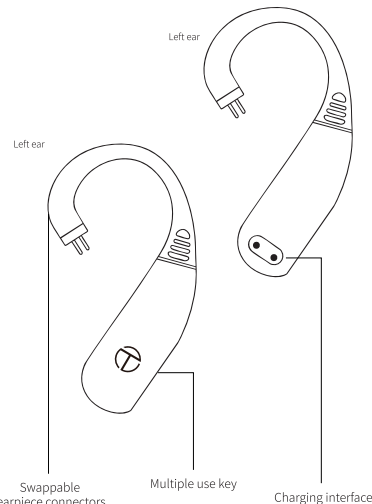


TRN  Scallop Instruction manual	Product overview  <2>	 <3>	Operation Manual Turning on 1. Remove earpieces from the charging case, it will turn on automatically 2.Long press 3 seconds after auto off Voice prompt: "Power On" Indicator light: Red and blue LEDs flash simultaneously. Turning off 1. Return earpieces to the charging case, it will turn off automatically. 2.Auto-off in 3 minutes when disconnected Voice prompt: "Power Off" Indicator light: Red LED lights for 2 second. Pairing mode Once the left and right earpieces are connected, both earpieces will activate pairing mode. In your device's Bluetooth settings, search for Scallop and choose to pair. Voice prompt: "Pairing" Indicator light: red and blue LEDs flash simultaneously. Reset previous paired setting Disconnect from phone. Scallop In pairing mode. Click 3 times on the main ear to restore the factory settings It will automatically shut down after restoring the factory settings (need to reboot) Voice prompt: "Beep" x2 Indicator light: Red LED lights for 1 second. Once reset, red and blue LEDs flash simultaneously. Revert to connection 1. Connection for both the primary and secondary earpieces remain active for 10 seconds, subsequently powers off automatically after 3 minutes of inactivity. Voice prompt: "Power Off" 2. Unstable connection Voice prompt: "Pairing" Indicator light: Red and blue LEDs flash simultaneously. 3. Abrupted incoming and outgoing calls during standby mode or music listening. Earpieces with power off within 3 minutes. Voice prompt: "Disconnected" Connect and disconnect from the phone 1. Disconnect from phone. Voice prompt: "Disconnected pairing" Indicator light: Red and blue LEDs flash simultaneously. 2. When connected, the earpieces turn off. Voice prompt: "Power off" Indicator light: Red LED lights for 1 second. <4>	Previous Press button 3 times for PREVIOUS track. Next Press button 2 times for NEXT track. Reject a call During an incoming call, long press the left and right earpieces MFB buttons for 1 second until you hear a beep. Voice prompt: "Beep" Pause / playback When playing music, press the left and right earpieces MFB buttons to play and pause. Battery status display in iOS The battery capacity of earpieces can be displayed on an iPhone. WeChat/QQ voice listening/recording When connected, press WeChat or QQ messenger to listen or to record a message. Answer a call During an incoming call, press the left and right earpieces MFB buttons. End a call During a call, press the left and right earpieces MFB buttons. Voice assistant (Siri) 1. Long press for 1 second until a beep is heard, then let go to activate Siri. 2. Long press for 1 second until a beep is heard, let go to exit to deactivate Siri. Auto power off 1. When there is no connection between the designated device and both earpieces for more than 3 minutes. Voice prompt: "Power off" Indicator light: Red LED lights for 1 second. 2. When power is lower than 3.05V. Voice prompt: "Power off" Indicator light: Red LED lights for 1 second. Video and gaming audio output When connected, watch video and play games as per normal. <5>	Charging Charging current: 5V/500mA for wired charging. The Bluetooth Module automatically shuts down during charging. The charging case provides a charging current of 5V/500mA for the Bluetooth Module. Device indicator light: Steady red light. Charging case indicator lights: When charging the Bluetooth module, if the battery level in the charging case is between 75-100%, the indicators ①②③④ remain on. When the battery level is between 50-75%, the indicators ①②③ stay on. When the battery level is between 25-50%, the indicators ①② stay on. When the battery level is between 0-25%, only indicator ① stays on. When the battery level is between 0-5%, indicator ① blinks. Once the Bluetooth module is fully charged, the charging case indicator goes off. When the charging case is being charged, if the battery level reaches 0-25%, the ① light blinks, if the battery level reaches 25-50%, the ② light blinks, if the battery level reaches 50-75%, the ③ light blinks, if the battery level reaches 75-100%, the ④ light blinks. Once the charging case is fully charged, all four indicators remain on. Low power warning When the battery voltage drops below 3.3V, "battery low" will be prompted every 2 minutes. The earphone indicator light will flash slowly in red. Specifications Bluetooth version: 5.3 Input voltage: 5V-1A Radio frequency range: 2.402MHz to 2.480MHz Effective range: 15 meters Bluetooth codec: AAC, SBC Bluetooth profile: HFP, A2DP, HSP, AVRCP Charging times: (Earpieces) 1.5 hours to full-charge, (Charging case) 3 hours Earpiece battery capacity: 60mAh per earpiece Charging case battery capacity: 700mAh Music time: approx. 13 hours Standby time: at least 180 hours Auto shut-off: 3 minutes when not connected to a Bluetooth device Microphone type: 3722 (sensitivity -42db ± 3dB) Operation temperature: 0 ~ 40 °C Storage temperature: -10 ~ 50 °C <6>	FCC Warning Statement Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radiocommunications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. <7>
--	--	---	---	---	--	--