



# RADIO TEST REPORT

**FCC ID** : 2BXG6FAST5698  
**Equipment** : 5G GATEWAY  
**Brand Name** : T-Mobile  
**Model Name** : FAST5698  
**Marketing Name** : TMO-G5MSG  
**Applicant** : SAGEMCOM USA LLC  
1301 West President George Bush Highway Ste  
330, Richardson, Texas, United States, 75080  
**Manufacturer** : SAGEMCOM USA LLC  
1301 West President George Bush Highway Ste  
330, Richardson, Texas, United States, 75080  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Jul. 20, 2026, and testing was started from Jul. 28, 2026 and completed on Aug. 20, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

|                                                                                               |           |
|-----------------------------------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                                                       | <b>3</b>  |
| <b>Summary of Test Result.....</b>                                                            | <b>4</b>  |
| <b>1 General Description .....</b>                                                            | <b>5</b>  |
| 1.1 Information.....                                                                          | 5         |
| 1.2 Applicable Standards .....                                                                | 11        |
| 1.3 Testing Location Information .....                                                        | 11        |
| 1.4 Measurement Uncertainty .....                                                             | 12        |
| <b>2 Test Configuration of EUT.....</b>                                                       | <b>13</b> |
| 2.1 Test Channel Mode .....                                                                   | 13        |
| 2.2 The Worst Case Measurement Configuration .....                                            | 18        |
| 2.3 EUT Operation during Test .....                                                           | 19        |
| 2.4 Accessories .....                                                                         | 20        |
| 2.5 Support Equipment.....                                                                    | 20        |
| 2.6 Test Setup Diagram .....                                                                  | 21        |
| <b>3 Transmitter Test Result .....</b>                                                        | <b>23</b> |
| 3.1 AC Power-line Conducted Emissions .....                                                   | 23        |
| 3.2 Emission Bandwidth .....                                                                  | 25        |
| 3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) .....                          | 26        |
| 3.4 Peak Power Spectral Density (E.I.R.P.).....                                               | 29        |
| 3.5 Unwanted Emissions.....                                                                   | 32        |
| 3.6 Contention Based Protocol.....                                                            | 37        |
| <b>4 Test Equipment and Calibration Data .....</b>                                            | <b>38</b> |
| <b>Appendix A. Test Results of AC Power-line Conducted Emissions</b>                          |           |
| <b>Appendix B. Test Results of Emission Bandwidth</b>                                         |           |
| <b>Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)</b> |           |
| <b>Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)</b>                     |           |
| <b>Appendix E. Test Results of Unwanted Emissions</b>                                         |           |
| <b>Appendix F. Test Results of Contention-Based Protocol</b>                                  |           |
| <b>Appendix G. Test Photos</b>                                                                |           |
| <b>Photographs of EUT v01</b>                                                                 |           |



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A12\_5 Ver2.0



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                                                 | Result (PASS/FAIL) | Remark                                                       |
|---------------|-----------------|------------------------------------------------------------|--------------------|--------------------------------------------------------------|
| 1.1.3         | 15.203          | Antenna Requirement                                        | PASS               | -                                                            |
| 3.1           | 15.207          | AC Power-line Conducted Emissions                          | PASS               | -                                                            |
| 3.2           | 15.407(a)       | Emission Bandwidth                                         | PASS               | -                                                            |
| 3.3           | 15.407(a)       | Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) | PASS               | -                                                            |
| -             | 15.407(a)       | Proper Power Adjustment                                    | N/A                | Non-Dual Client Device / non-Standard Client Device w/o test |
| -             | 15.407(a)       | Transmit Power Control                                     | N/A                | Non-Very Low Power Device w/o test                           |
| 3.4           | 15.407(a)       | Peak Power Spectral Density (E.I.R.P.)                     | PASS               | -                                                            |
| 3.5           | 15.407(b)       | Unwanted Emissions                                         | PASS               | -                                                            |
| 3.6           | 15.407(d)       | Contention-Based Protocol                                  | PASS               | -                                                            |

### Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

### Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

**Reviewed by: Sam Chen**

**Report Producer: Muse Chan**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11          | Ch. Frequency (MHz) | Channel Number |
|-----------------------|---------------------------|---------------------|----------------|
| 5925-7125             | a, ax (HEW20), be (EHT20) | 5955-7115           | 1-233 [59]     |
| 5925-7125             | ax (HEW40), be (EHT40)    | 5965-7085           | 3-227 [29]     |
| 5925-7125             | ax (HEW80), be (EHT80)    | 5985-7025           | 7-215 [14]     |
| 5925-7125             | ax (HEW160), be (EHT160)  | 6025-6985           | 15-207 [7]     |
| 5925-7125             | be (EHT320)               | 6105-6905           | 31-191 [6]     |

| Band           | Mode                                             | BWch (MHz) | Nant |
|----------------|--------------------------------------------------|------------|------|
| 5.925-7.125GHz | 802.11 a,<br>802.11 ax HEW20,<br>802.11 be EHT20 | 20         | 4TX  |
|                | 802.11 ax HEW20-BF,<br>802.11 be EHT20-BF        | 20         | 4TX  |
|                | 802.11 ax HEW40,<br>802.11 be EHT40              | 40         | 4TX  |
|                | 802.11 ax HEW40-BF,<br>802.11 be EHT40-BF        | 40         | 4TX  |
|                | 802.11 ax HEW80,<br>802.11 be EHT80              | 80         | 4TX  |
|                | 802.11 ax HEW80-BF,<br>802.11 be EHT80-BF        | 80         | 4TX  |
|                | 802.11 ax HEW160,<br>802.11 be EHT160            | 160        | 4TX  |
|                | 802.11 ax HEW160-BF,<br>802.11 be EHT160-BF      | 160        | 4TX  |
|                | 802.11 be EHT320                                 | 320        | 4TX  |
|                | 802.11 be EHT320-BF                              | 320        | 4TX  |

**For Multi\_RU:**

| RU-tone       | Bandwidth (MHz) |  |     | 6GHz Test CH  |                 |
|---------------|-----------------|--|-----|---------------|-----------------|
|               |                 |  |     | UNII-5<br>CH7 | UNII-8<br>CH215 |
| 484+242[MCS0] | 484             |  | 242 | V             | V               |
| 484+242[MCS4] | 484             |  | 242 | V             | V               |

| RU-tone       | Bandwidth (MHz) |  |     | 6GHz Test CH   |                 |
|---------------|-----------------|--|-----|----------------|-----------------|
|               |                 |  |     | UNII-5<br>CH15 | UNII-8<br>CH207 |
| 996+484[MCS0] | 484             |  | 996 | V              | V               |
| 996+484[MCS4] | 484             |  | 996 | V              | V               |

| RU-tone         | Bandwidth (MHz) |     |     |     | 6GHz Test CH   |                 |
|-----------------|-----------------|-----|-----|-----|----------------|-----------------|
|                 |                 |     |     |     | UNII-5<br>CH31 | UNII-8<br>CH191 |
| 3x996[MCS0]     | 996             | 996 | 996 |     | V              | —               |
| 3x996[MCS4]     | 996             | 996 | 996 |     | V              | —               |
| 2x996+484[MCS0] |                 | 484 | 996 | 996 | —              | V               |
| 2x996+484[MCS4] |                 | 484 | 996 | 996 | —              | V               |
| 2x996+484[MCS0] | 996             | 996 |     | 484 | V              | V               |
| 2x996+484[MCS4] | 996             | 996 |     | 484 | V              | V               |

**Note:**

- 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

**1.1.2 Worst case of MRU evaluation procedure**

|                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Complete test Full RU BE & PSD                                                                                                                                                                      |
| 2. Measure the PSD of each MRU by conducted method and it is less than the Full RU conducted PSD.                                                                                                      |
| 3. Measure the Band edge emission of each MRU by conducted method and find out the MRU worst case configuration.                                                                                       |
| 4. Follow step 3 to find the worst MRU configuration and perform radiated PSD testing.                                                                                                                 |
| 5. Follow step 3 to find the worst MRU configuration and perform radiated unwanted emission testing.                                                                                                   |
| 6. Confirm whether the worst MRU configuration setting in step 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU needs to be retested. |
| 7. Use worst configuration of MRU and perform MASK measurements by conducted method.                                                                                                                   |

**1.1.3 Antenna Information**

| Ant. | Port | Brand    | Model Name | Antenna Type | Connector | Gain (dBi) | Modes of Operation         |
|------|------|----------|------------|--------------|-----------|------------|----------------------------|
| 1    | 1    | Pegatron | WiFi-0     | PCB          | I-PEX     | Note 1     | WLAN 2.4GHz<br>WLAN 5GHz   |
| 2    | 2    | Pegatron | WiFi-1     | PCB          | I-PEX     |            |                            |
| 3    | 3    | Pegatron | WiFi-2     | PCB          | I-PEX     |            |                            |
| 4    | 4    | Pegatron | WiFi-3     | PCB          | I-PEX     |            |                            |
| 5    | 1    | Pegatron | 6G-0       | PCB          | I-PEX     |            | WLAN 6GHz                  |
| 6    | 2    | Pegatron | 6G-1       | PCB          | I-PEX     |            |                            |
| 7    | 3    | Pegatron | 6G-2       | PCB          | I-PEX     |            |                            |
| 8    | 4    | Pegatron | 6G-3       | PCB          | I-PEX     |            |                            |
| 9    | 1    | Pegatron | IoT-1      | PCB          | I-PEX     |            | Bluetooth or IEEE 802.15.4 |
| 10   | 2    | Pegatron | IoT-2      | PCB          | I-PEX     |            |                            |
| 11   | -    | Pegatron | 5G NR-0    | PCB          | I-PEX     | -          | WWAN                       |
| 12   | -    | Pegatron | 5G NR-1    | FPC          | I-PEX     |            |                            |
| 13   | -    | Pegatron | 5G NR-2    | PCB          | I-PEX     |            |                            |
| 14   | -    | Pegatron | 5G NR-3    | FPC          | I-PEX     |            |                            |
| 15   | -    | Pegatron | 5G NR-4    | PCB          | I-PEX     |            |                            |
| 16   | -    | Pegatron | 5G NR-5    | FPC          | I-PEX     |            |                            |
| 17   | -    | Pegatron | 5G NR-6    | PCB          | I-PEX     |            |                            |
| 18   | -    | Pegatron | 5G NR-7    | FPC          | I-PEX     |            |                            |
| 19   | -    | Pegatron | GNSS       | PCB          | I-PEX     |            | GPS                        |



Note 1:

| Ant. | Antenna Gain (dBi)         |           |         |         |        |
|------|----------------------------|-----------|---------|---------|--------|
|      | WLAN 2.4GHz                | WLAN 5GHz |         |         |        |
|      |                            | UNII 1    | UNII 2A | UNII 2C | UNII 3 |
| 1    | 4.58                       | 4.75      | 3.43    | 4.70    | 5.04   |
| 2    | 4.65                       | 3.37      | 3.37    | 3.85    | 3.96   |
| 3    | 4.86                       | 2.86      | 3.61    | 3.98    | 3.98   |
| 4    | 3.77                       | 4.63      | 4.31    | 4.21    | 4.21   |
| Ant. | WLAN 6GHz                  |           |         |         |        |
|      | UNII 5                     | UNII 6    | UNII 7  | UNII 8  |        |
|      | 5                          | 4.83      | 5.64    | 5.80    |        |
| 6    | 3.34                       | 3.42      | 3.31    | 4.00    |        |
| 7    | 6.34                       | 5.18      | 5.26    | 6.21    |        |
| 8    | 5.16                       | 6.05      | 5.97    | 6.19    |        |
| Ant. | Bluetooth or IEEE 802.15.4 |           |         |         |        |
| 9    | 3.72                       |           |         |         |        |
| 10   | 2.93                       |           |         |         |        |

| Item | Composite Gain (dBi) |           |         |         |        |
|------|----------------------|-----------|---------|---------|--------|
|      | WLAN 2.4GHz          | WLAN 5GHz |         |         |        |
|      |                      | UNII 1    | UNII 2A | UNII 2C | UNII 3 |
| 4T1S | 5.79                 | 6.08      | 5.66    | 5.66    | 5.89   |
| 4T2S | 4.86                 | 4.92      | 4.31    | 4.36    | 5.04   |
| 4T3S | 4.86                 | 4.75      | 4.31    | 4.21    | 5.04   |
| 4T4S | 4.86                 | 4.75      | 4.31    | 4.21    | 5.04   |
| Item | WLAN 6GHz            |           |         |         |        |
|      | UNII 5               | UNII 6    | UNII 7  | UNII 8  |        |
|      | 4T1S                 | 6.05      | 5.97    | 6.21    |        |
| 4T2S | 6.34                 | 6.05      | 5.97    | 6.21    |        |
| 4T3S | 6.34                 | 6.05      | 5.97    | 6.21    |        |
| 4T4S | 6.34                 | 6.05      | 5.97    | 6.21    |        |

Note 2: The above information was declared by manufacturer.

Note 3: **For 2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (4TX/4RX)**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 5GHz IEEE 802.11a/n/ac/ax/be mode (4TX/4RX)**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 6GHz IEEE 802.11a/ax/be mode (4TX/4RX)**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For Bluetooth or IEEE 802.15.4 mode (1TX/1RX)**

The EUT supports the antenna with TX and RX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected for testing.

### 1.1.4 Mode Test Duty Cycle

**For Full RU:**

| Mode                       | DC    | DCF (dB) | T (s)  | VBW (Hz) 1/T    |
|----------------------------|-------|----------|--------|-----------------|
| 802.11a_Nss 1,(6D)         | 0.993 | 0.03     | 1.981m | 10Hz (DC>=0.98) |
| 802.11be EHT20_Nss 1,(M0)  | 0.997 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT40_Nss 1,(M0)  | 0.998 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT80_Nss 1,(M0)  | 0.998 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT160_Nss 1,(M0) | 0.998 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT320_Nss 1,(M0) | 0.997 | 0.01     | 5.459m | 10Hz (DC>=0.98) |
| 802.11be EHT20_Nss 4,(M0)  | 0.998 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT40_Nss 4,(M0)  | 0.998 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT80_Nss 4,(M0)  | 0.997 | 0.01     | 5.456m | 10Hz (DC>=0.98) |
| 802.11be EHT160_Nss 4,(M0) | 0.975 | 0.11     | 5.444m | 200             |
| 802.11be EHT320_Nss 4,(M0) | 0.998 | 0.01     | 5.459m | 10Hz (DC>=0.98) |

**For Multi\_RU:**

| Mode                                     | DC    | DCF (dB) | T (s)  | VBW (Hz) 1/T |
|------------------------------------------|-------|----------|--------|--------------|
| 802.11be EHT80_Nss 1,(M0),RU484+RU242    | 0.896 | 0.48     | 1.693m | 1k           |
| 802.11be EHT80_Nss 1,(M4),RU484+RU242    | 0.936 | 0.29     | 5.253m | 200          |
| 802.11be EHT160_Nss 1,(M0),RU996+RU484   | 0.973 | 0.12     | 5.244m | 200          |
| 802.11be EHT160_Nss 1,(M4),RU996+RU484   | 0.952 | 0.21     | 5.261m | 200          |
| 802.11be EHT320_Nss 1,(M0),3xRU996       | 0.932 | 0.31     | 5.285m | 200          |
| 802.11be EHT320_Nss 1,(M4),3xRU996       | 0.932 | 0.31     | 5.285m | 200          |
| 802.11be EHT320_Nss 1,(M0),2xRU996+RU484 | 0.934 | 0.3      | 5.281m | 200          |
| 802.11be EHT320_Nss 1,(M4),2xRU996+RU484 | 0.948 | 0.23     | 5.269m | 200          |

**Note:**

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.5 EUT Operational Condition**

|                                            |                                                                                                        |                                                      |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| <b>EUT Power Type</b>                      | From Power Adapter                                                                                     |                                                      |
| <b>Beamforming Function</b>                | <input checked="" type="checkbox"/> With beamforming                                                   | <input type="checkbox"/> Without beamforming         |
|                                            | The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz, and ax/be in 6GHz. |                                                      |
| <b>Device Type</b>                         | <input checked="" type="checkbox"/> Indoor Access Point                                                | <input type="checkbox"/> Subordinate                 |
|                                            | <input type="checkbox"/> Indoor Client                                                                 | <input type="checkbox"/> Standard Power Access Point |
|                                            | <input type="checkbox"/> Dual Client                                                                   | <input type="checkbox"/> Standard Client             |
|                                            | <input type="checkbox"/> Fixed Client                                                                  | <input type="checkbox"/> Very Low Power              |
| <b>Condition of EUT</b>                    | <input checked="" type="checkbox"/> Indoor                                                             | <input type="checkbox"/> Outdoor                     |
| <b>Channel Puncturing Function</b>         | <input type="checkbox"/> Supported                                                                     |                                                      |
|                                            | <input checked="" type="checkbox"/> Unsupported                                                        |                                                      |
|                                            | Note: The EUT doesn't support puncturing for CBP                                                       |                                                      |
| <b>Support RU</b>                          | <input checked="" type="checkbox"/> Full RU                                                            | <input checked="" type="checkbox"/> Partial RU       |
| <b>Test Software Version</b>               | For Unwanted Emissions test: Tera Term V5.4.0<br>For others: QRCT4 Version 4.0.198.1                   |                                                      |
| <b>Software / Firmware Version for CBP</b> | F5698W manufOS 3.1.0                                                                                   |                                                      |

Note 1: The above information was declared by manufacturer.

Note 2: For beamforming operation, manufacturer automatically backs power down based on a  $10\log(NANT)$  factor based on CDD power.

**1.1.6 Table for WWAN Information**

| Support Function                                           |
|------------------------------------------------------------|
| 4G LTE Band: B2, B4, B5, B12, B25, B26, B41, B48, B66, B71 |
| 5G NR Band: n2, n25, n41, n48, n66, n71, n77               |

Note: The above information was declared by manufacturer.



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01
- ♦ FCC KDB 987594 D02 v03

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location Information                              |                                                                                                                                                                                                                                                |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory |                                                                                                                                                                                                                                                |
| Hsinchu<br>(TAF: 3787)                                    | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)<br>TEL: 886-3-656-9065 FAX: 886-3-656-9085<br>Test site Designation No. TW3787 with FCC.<br>Conformity Assessment Body Identifier (CABID) TW3787 with ISED. |

| Test Condition                                   | Test Site No. | Test Engineer | Test Environment<br>(°C / %)           | Test Date                       |
|--------------------------------------------------|---------------|---------------|----------------------------------------|---------------------------------|
| RF Conducted<br>(For other tests)                | TH01-CB       | Serway Lee    | 21.9~23.2 / 61~64                      | Aug. 01, 2026~<br>Aug. 06, 2026 |
| Radiated<br>below 1GHz                           | 03CH05-CB     | Lex Lee       | 23.8~24.1 / 56~60                      | Jul. 28, 2026~<br>Aug. 17, 2026 |
| Radiated<br>above 1GHz                           | 03CH01-CB     | Sean Ku       | 23.8~24.9 / 65~67                      |                                 |
|                                                  | 03CH02-CB     | Paul Hu       | 23.9~24.9 / 55~59<br>24.4~24.7 / 60~69 |                                 |
|                                                  | 03CH06-CB     | Jimmy Huang   | 24.1~24.9 / 56~58                      |                                 |
| AC Conduction                                    | CO02-CB       | Tim Chen      | 22~23 / 58~59                          | Aug. 20, 2026                   |
| RF Conducted<br>(Contention-Based Protocol test) | DF02-CB       | Paul Hu       | 24.1~24.8 / 61~65                      | Aug. 11, 2026~<br>Aug. 12, 2026 |



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 3.7 dB      | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz)     | 3.9 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.9 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 4.5 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 4.3 dB      | Confidence levels of 95% |
| Conducted Emission                   | 3.8 dB      | Confidence levels of 95% |
| Output Power Measurement             | 1.5 dB      | Confidence levels of 95% |
| Power Density Measurement            | 3.5 dB      | Confidence levels of 95% |
| Bandwidth Measurement                | 1.6 %       | Confidence levels of 95% |



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

For Full RU:

| Mode                           |
|--------------------------------|
| 802.11a_Nss1,(6Mbps)_4TX       |
| 5955MHz                        |
| 6195MHz                        |
| 6415MHz                        |
| 6435MHz                        |
| 6475MHz                        |
| 6515MHz                        |
| 6535MHz                        |
| 6695MHz                        |
| 6855MHz                        |
| 6875MHz                        |
| 6995MHz                        |
| 7095MHz                        |
| 7115MHz                        |
| 802.11be EHT20_Nss1,(MCS0)_4TX |
| 5955MHz                        |
| 6195MHz                        |
| 6415MHz                        |
| 6435MHz                        |
| 6475MHz                        |
| 6515MHz                        |
| 6535MHz                        |
| 6695MHz                        |
| 6855MHz                        |
| 6875MHz                        |
| 6995MHz                        |
| 7095MHz                        |
| 7115MHz                        |
| 802.11be EHT40_Nss1,(MCS0)_4TX |
| 5965MHz                        |
| 6205MHz                        |
| 6405MHz                        |
| 6445MHz                        |
| 6485MHz                        |



| Mode                            |
|---------------------------------|
| 6525MHz                         |
| 6565MHz                         |
| 6685MHz                         |
| 6845MHz                         |
| 6885MHz                         |
| 7005MHz                         |
| 7085MHz                         |
| 802.11be EHT80_Nss1,(MCS0)_4TX  |
| 5985MHz                         |
| 6225MHz                         |
| 6385MHz                         |
| 6465MHz                         |
| 6545MHz                         |
| 6625MHz                         |
| 6705MHz                         |
| 6785MHz                         |
| 6865MHz                         |
| 6945MHz                         |
| 7025MHz                         |
| 802.11be EHT160_Nss1,(MCS0)_4TX |
| 6025MHz                         |
| 6185MHz                         |
| 6345MHz                         |
| 6505MHz                         |
| 6665MHz                         |
| 6825MHz                         |
| 6985MHz                         |
| 802.11be EHT320_Nss1,(MCS0)_4TX |
| 6105MHz                         |
| 6265MHz                         |
| 6425MHz                         |
| 6585MHz                         |
| 6745MHz                         |
| 6905MHz                         |
| 802.11be EHT20_Nss4,(MCS0)_4TX  |
| 5955MHz                         |
| 6195MHz                         |
| 6415MHz                         |
| 6435MHz                         |



| Mode                            |
|---------------------------------|
| 6475MHz                         |
| 6515MHz                         |
| 6535MHz                         |
| 6695MHz                         |
| 6855MHz                         |
| 6875MHz                         |
| 6995MHz                         |
| 7095MHz                         |
| 7115MHz                         |
| 802.11be EHT40_Nss4,(MCS0)_4TX  |
| 5965MHz                         |
| 6205MHz                         |
| 6405MHz                         |
| 6445MHz                         |
| 6485MHz                         |
| 6525MHz                         |
| 6565MHz                         |
| 6685MHz                         |
| 6845MHz                         |
| 6885MHz                         |
| 7005MHz                         |
| 7085MHz                         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  |
| 5985MHz                         |
| 6225MHz                         |
| 6385MHz                         |
| 6465MHz                         |
| 6545MHz                         |
| 6625MHz                         |
| 6705MHz                         |
| 6785MHz                         |
| 6865MHz                         |
| 6945MHz                         |
| 7025MHz                         |
| 802.11be EHT160_Nss4,(MCS0)_4TX |
| 6025MHz                         |
| 6185MHz                         |
| 6345MHz                         |
| 6505MHz                         |



| Mode                            |
|---------------------------------|
| 6665MHz                         |
| 6825MHz                         |
| 6985MHz                         |
| 802.11be EHT320_Nss4,(MCS0)_4TX |
| 6105MHz                         |
| 6265MHz                         |
| 6425MHz                         |
| 6585MHz                         |
| 6745MHz                         |
| 6905MHz                         |

**For Multi\_RU:**

| Mode                                                |
|-----------------------------------------------------|
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX    |
| 5985MHz                                             |
| 802.11be EHT80_Nss1,(MCS4),RU484+RU242 MRU 3_4TX    |
| 5985MHz                                             |
| 802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX    |
| 7025MHz                                             |
| 802.11be EHT80_Nss1,(MCS4),RU484+RU242 MRU 3_4TX    |
| 7025MHz                                             |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX   |
| 6025MHz                                             |
| 802.11be EHT160_Nss1,(MCS4),RU996+RU484 MRU 2_4TX   |
| 6025MHz                                             |
| 802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX   |
| 6985MHz                                             |
| 802.11be EHT160_Nss1,(MCS4),RU996+RU484 MRU 2_4TX   |
| 6985MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX       |
| 6105MHz                                             |
| 802.11be EHT320_Nss1,(MCS4),3xRU996 MRU 4_4TX       |
| 6105MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX |
| 6105MHz                                             |
| 802.11be EHT320_Nss1,(MCS4),2xRU996+RU484 MRU 8_4TX |
| 6105MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX |
| 6105MHz                                             |



| Mode                                                |
|-----------------------------------------------------|
| 802.11be EHT320_Nss1,(MCS4),2xRU996+RU484 MRU 5_4TX |
| 6105MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX       |
| 6905MHz                                             |
| 802.11be EHT320_Nss1,(MCS4),3xRU996 MRU 4_4TX       |
| 6905MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX |
| 6905MHz                                             |
| 802.11be EHT320_Nss1,(MCS4),2xRU996+RU484 MRU 8_4TX |
| 6905MHz                                             |
| 802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX |
| 6905MHz                                             |
| 802.11be EHT320_Nss1,(MCS4),2xRU996+RU484 MRU 5_4TX |
| 6905MHz                                             |

**Note:**

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation.  
The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report.



## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | AC power-line conducted emissions                                                       |
| <b>Condition</b>                                                                                                              | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |
| <b>Operating Mode</b>                                                                                                         | CTX                                                                                     |
| 1                                                                                                                             | EUT + Adapter 1_WLAN 2.4GHz                                                             |
| 2                                                                                                                             | EUT + Adapter 2_WLAN 2.4GHz                                                             |
| Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~6 will follow this same test mode. |                                                                                         |
| 3                                                                                                                             | EUT + Adapter 1_WLAN 5GHz                                                               |
| 4                                                                                                                             | EUT + Adapter 1_WLAN 6GHz                                                               |
| 5                                                                                                                             | EUT + Adapter 1_Bluetooth                                                               |
| 6                                                                                                                             | EUT + Adapter 1_IEEE 802.15.4                                                           |
| For operating mode 1 is the worst case and it was record in this test report.                                                 |                                                                                         |

| The Worst Case Mode for Following Conformance Tests |                                                 |
|-----------------------------------------------------|-------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth<br>Contention Based Protocol |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains        |

| The Worst Case Mode for Following Conformance Tests |                                                                                                                                         |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)                                                                              |
| <b>Test Condition</b>                               | Radiated measurement                                                                                                                    |
|                                                     | After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report. |
| 1                                                   | EUT in Y axis                                                                                                                           |

| The Worst Case Mode for Following Conformance Tests |                                                                                                                                         |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Peak Power Spectral Density (E.I.R.P.)                                                                                                  |
| <b>Test Condition</b>                               | Radiated measurement                                                                                                                    |
|                                                     | After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report. |
| 1                                                   | EUT in Y axis_Full RU                                                                                                                   |
| 2                                                   | EUT in Y axis_Multi_RU                                                                                                                  |

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | Unwanted Emissions                                                                                                                                                                                                                                  |
| <b>Test Condition</b>                                                                                                         | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>Operating Mode &lt; 1GHz</b>                                                                                               | CTX                                                                                                                                                                                                                                                 |
|                                                                                                                               | After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.                                                                                                             |
| 1                                                                                                                             | EUT in Y axis + Adapter 1_WLAN 2.4GHz                                                                                                                                                                                                               |
| 2                                                                                                                             | EUT in Y axis + Adapter 2_WLAN 2.4GHz                                                                                                                                                                                                               |
| Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~6 will follow this same test mode. |                                                                                                                                                                                                                                                     |
| 3                                                                                                                             | EUT in Y axis + Adapter 1_WLAN 5GHz                                                                                                                                                                                                                 |
| 4                                                                                                                             | EUT in Y axis + Adapter 1_WLAN 6GHz                                                                                                                                                                                                                 |
| 5                                                                                                                             | EUT in Y axis + Adapter 1_Bluetooth                                                                                                                                                                                                                 |
| 6                                                                                                                             | EUT in Y axis + Adapter 1_IEEE 802.15.4                                                                                                                                                                                                             |
| For operating mode 4 is the worst case and it was record in this test report.                                                 |                                                                                                                                                                                                                                                     |
| <b>Operating Mode &gt; 1GHz</b>                                                                                               | CTX                                                                                                                                                                                                                                                 |
|                                                                                                                               | After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.                                                                                                             |
| 1                                                                                                                             | EUT in Y axis_Full RU                                                                                                                                                                                                                               |
| 2                                                                                                                             | EUT in Y axis_Multi_RU                                                                                                                                                                                                                              |

| The Worst Case Mode for Following Conformance Tests |                                          |
|-----------------------------------------------------|------------------------------------------|
| <b>Tests Item</b>                                   | Emission MASK                            |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains |
| 1                                                   | Full RU                                  |
| 2                                                   | Multi_RU                                 |

## 2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 2.4 Accessories

| Accessories    |            |                        |                                                                                                                        |
|----------------|------------|------------------------|------------------------------------------------------------------------------------------------------------------------|
| Equipment Name | Brand Name | Model Name             | Rating                                                                                                                 |
| Adapter 1      | MASS POWER | PD065E-D1C0AVU         | INPUT: 100-240V~, 50/60Hz, 1.5A<br>OUTPUT: 5.0V, 3.0A or 9.0V, 3.0A or<br>12.0V, 3.0A or 15.0V, 3.0A or<br>20.0V, 3.0A |
| Adapter 2      | MOSO       | P30-V3000R200-060Q0-US | INPUT: 100-240V~50/60Hz, 1.7A max.<br>OUTPUT: 5V, 3A or 9V, 3A or 12V, 3A or<br>15V, 3A or 20V, 3A                     |

## 2.5 Support Equipment

For AC Conduction:

| Support Equipment |                   |            |            |        |
|-------------------|-------------------|------------|------------|--------|
| No.               | Equipment         | Brand Name | Model Name | FCC ID |
| A                 | Type-C Flash disk | Kingston   | DT70       | N/A    |
| B                 | SIM Card          | T-mobile   | N/A        | N/A    |
| C                 | NB                | Lenovo     | X1 Carbon  | N/A    |


For Radiated and RF Conducted (Other tests):


| Support Equipment |           |            |            |        |
|-------------------|-----------|------------|------------|--------|
| No.               | Equipment | Brand Name | Model Name | FCC ID |
| A                 | NB        | DELL       | E4300      | N/A    |

For RF Conducted (Contention Based Protocol test):

| Support Equipment |           |            |            |              |
|-------------------|-----------|------------|------------|--------------|
| No.               | Equipment | Brand Name | Model Name | FCC ID       |
| A                 | NB        | Lenovo     | L440       | N/A          |
| B                 | NB        | DELL       | E4300      | N/A          |
| C                 | Client    | ASUS       | RT-BE96U   | MSQ-RTBE6G00 |

## 2.6 Test Setup Diagram

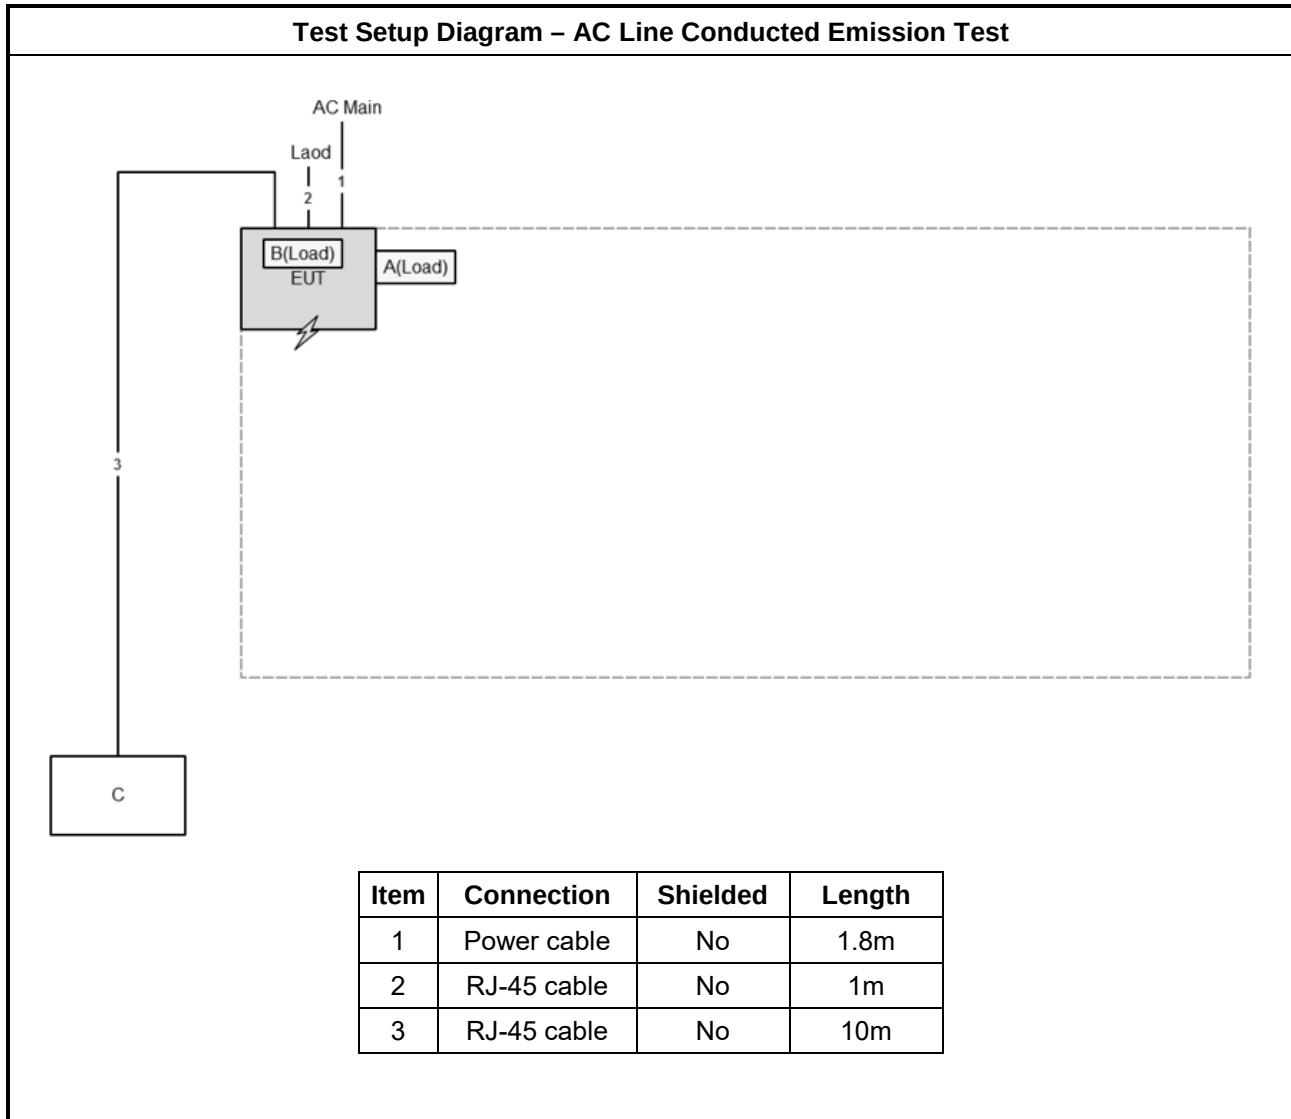

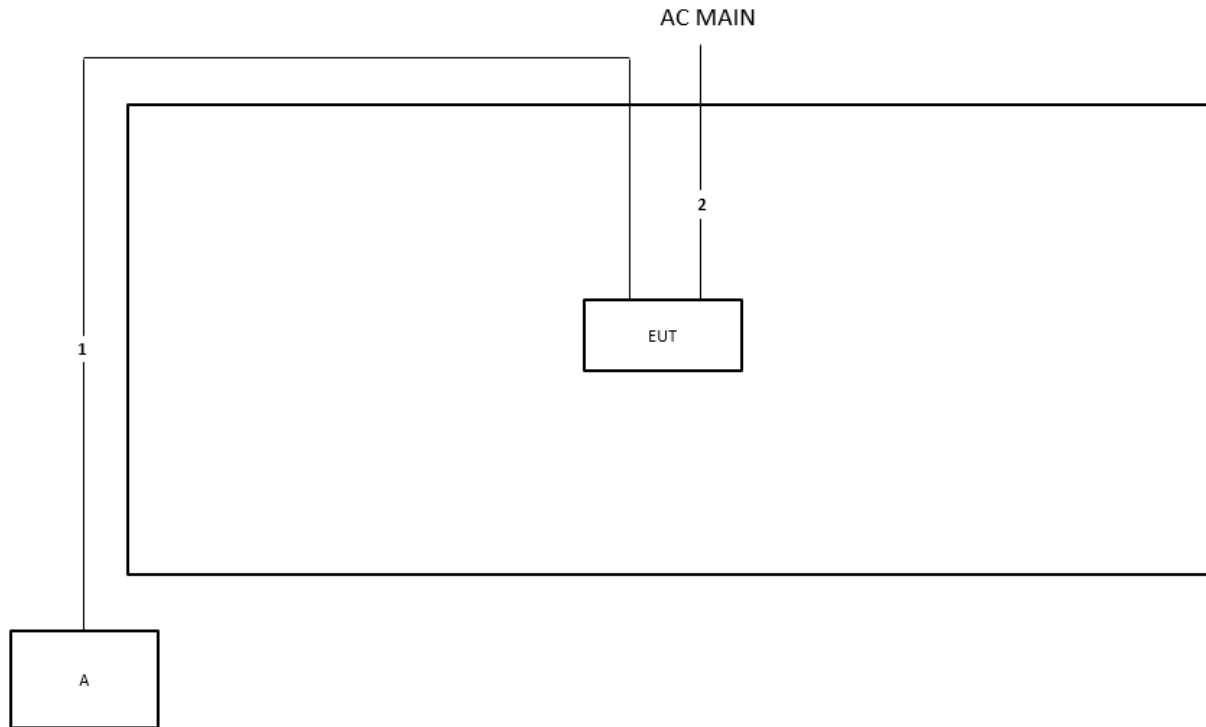**Test Setup Diagram - Radiated Test**


| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | RJ-45 cable | No       | 10m    |
| 2    | Power cable | No       | 1.8m   |

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit                  |            |           |
|----------------------------------------------------------|------------|-----------|
| Frequency Emission (MHz)                                 | Quasi-Peak | Average   |
| 0.15-0.5                                                 | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                                    | 56         | 46        |
| 5-30                                                     | 60         | 50        |
| Note 1: * Decreases with the logarithm of the frequency. |            |           |


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

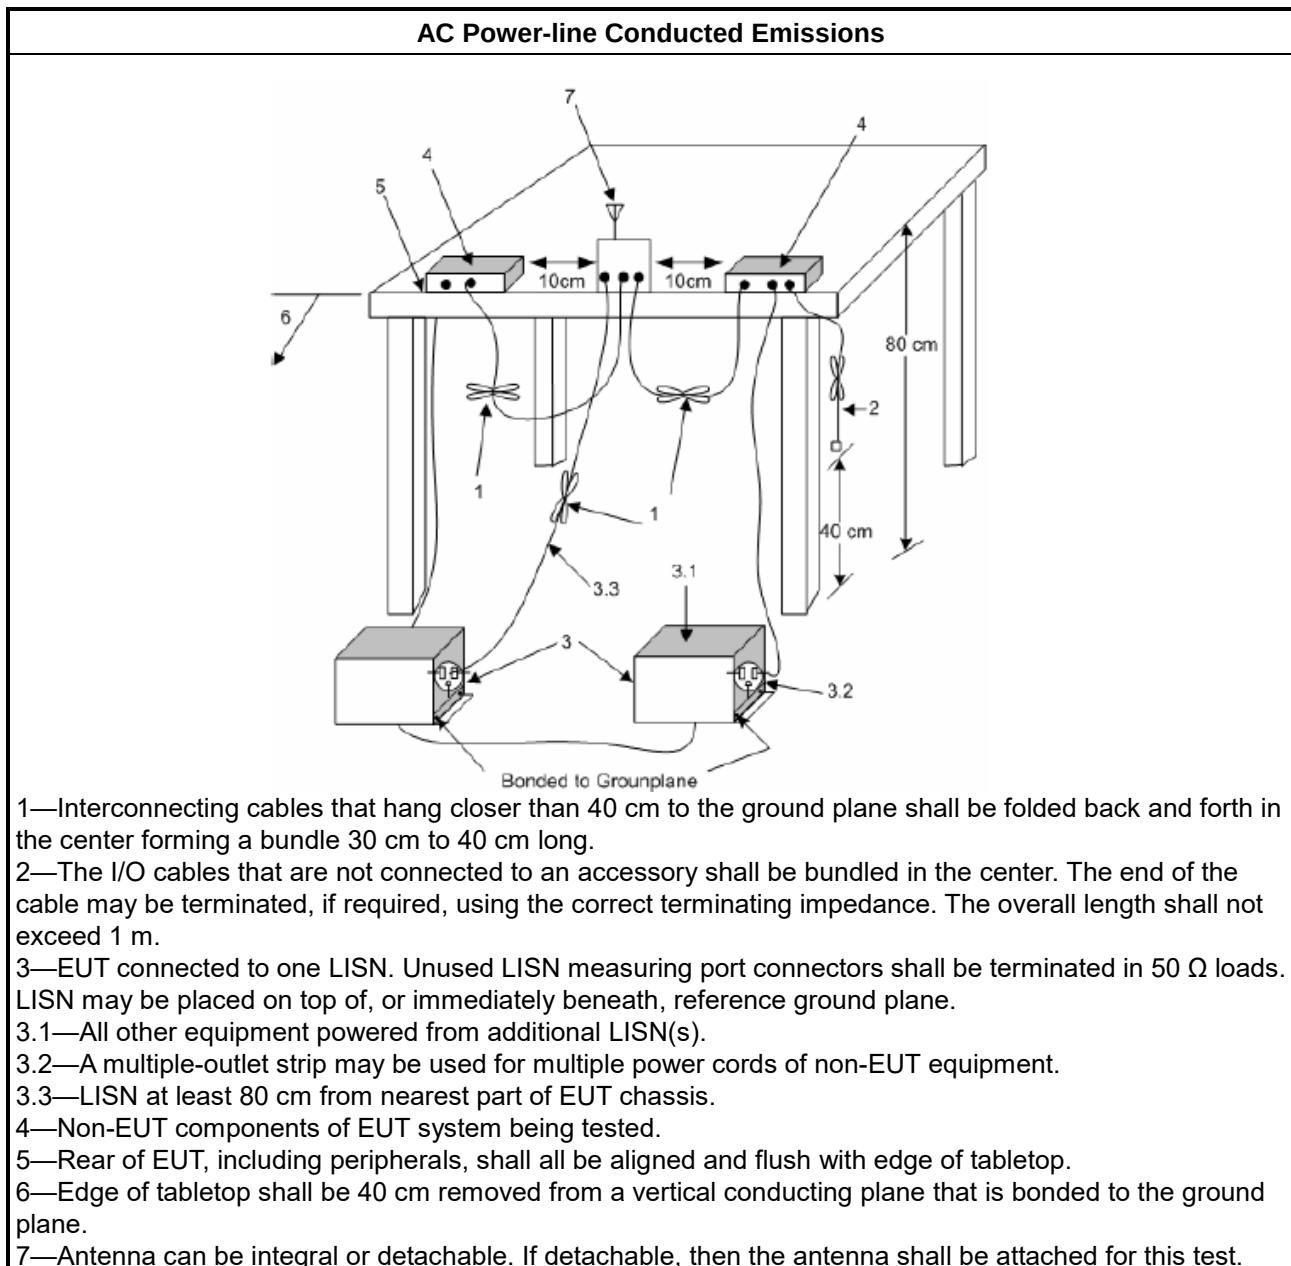

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                               |
|-------------------------------------|---------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                               |
| <input checked="" type="checkbox"/> | For the 5925-6425 GHz band, need less than 320 MHz bandwidth. |
| <input checked="" type="checkbox"/> | For the 6425-6525 GHz band, need less than 320 MHz bandwidth. |
| <input checked="" type="checkbox"/> | For the 6525-6875 GHz band, need less than 320 MHz bandwidth. |
| <input checked="" type="checkbox"/> | For the 6875-7125 GHz band, need less than 320 MHz bandwidth. |
| <b>RLAN Devices</b>                 |                                                               |
| <input type="checkbox"/>            | For the 5925-6425 GHz band, need less than 320 MHz bandwidth. |
| <input type="checkbox"/>            | For the 6425-6525 GHz band, need less than 320 MHz bandwidth. |
| <input type="checkbox"/>            | For the 6525-6875 GHz band, need less than 320 MHz bandwidth. |
| <input type="checkbox"/>            | For the 6875-7125 GHz band, need less than 320 MHz bandwidth. |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                                                    |                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul> |                                                                                                                                                          |
| <input checked="" type="checkbox"/>                                                                                            | According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                                                       | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.                                                                                       |
| <input type="checkbox"/>                                                                                                       | Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.                                                                                                   |

### 3.2.4 Test Setup

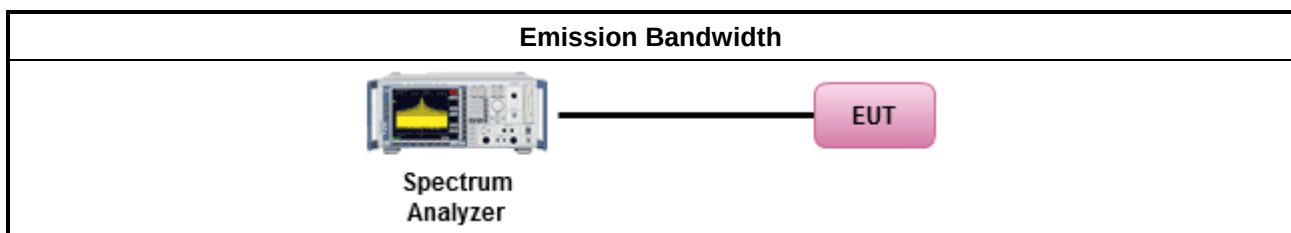

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



### 3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

#### 3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

| Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit    |                                                                                                                                                                                             |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                 |                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.925 ~ 6.425 GHz band: |                                                                                                                                                                                             |
|                                                                     | ■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
|                                                                     | ■ For indoor access point : e.i.r.p < 30 dBm.                                                                                                                                               |
|                                                                     | ■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.                                                                                                              |
|                                                                     | ■ For client device control of a standard power access point : e.i.r.p < 30 dBm.                                                                                                            |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p < 24 dBm.                                                                                                                   |
|                                                                     | ■ For very low power device : e.i.r.p < 14 dBm.                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 6.425 ~ 6.525 GHz band: |                                                                                                                                                                                             |
|                                                                     | ■ For indoor access point : e.i.r.p < 30 dBm.                                                                                                                                               |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p < 24 dBm.                                                                                                                   |
|                                                                     | ■ For very low power device : e.i.r.p < 14 dBm.                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 6.525 ~ 6.875 GHz band: |                                                                                                                                                                                             |
|                                                                     | ■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
|                                                                     | ■ For indoor access point : e.i.r.p < 30 dBm.                                                                                                                                               |
|                                                                     | ■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.                                                                                                              |
|                                                                     | ■ For client device control of a standard power access point : e.i.r.p < 30 dBm.                                                                                                            |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p < 24 dBm.                                                                                                                   |
|                                                                     | ■ For very low power device : e.i.r.p < 14 dBm.                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 6.875 ~ 7.125 GHz band: |                                                                                                                                                                                             |
|                                                                     | ■ For indoor access point : e.i.r.p < 30 dBm.                                                                                                                                               |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p < 24 dBm.                                                                                                                   |
|                                                                     | ■ For very low power device : e.i.r.p < 14 dBm.                                                                                                                                             |
| <b>RLAN Devices</b>                                                 |                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.925 ~ 7.125 GHz band:            |                                                                                                                                                                                             |
|                                                                     | ■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .                                                                                                                |
|                                                                     | ■ For low-power client devices < 24 dBm.                                                                                                                                                    |
|                                                                     | ■ For very low-power devices < 14 dBm.                                                                                                                                                      |
| <input type="checkbox"/> For the 5.925 ~ 6.875 GHz band:            |                                                                                                                                                                                             |



- |                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>For standard-power access points &amp; fixed client devices &lt; 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).</li></ul> |
| <ul style="list-style-type: none"><li>For standard client devices &lt; 30 dBm.</li></ul>                                                                                                                                               |


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.</li></ul> |                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                        | Average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                        | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).<br>Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.                                                                                                                                          |
|                                                                                                                                                        | <input type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                |
|                                                                                                                                                        | Wideband RF power meter and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                        | <input type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> For conducted measurement.                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                        | <ul style="list-style-type: none"><li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li></ul> |
|                                                                                                                                                        | <ul style="list-style-type: none"><li>If multiple transmit chains, EIRP calculation could be following as methods:<br/><math>P_{total} = P_1 + P_2 + \dots + P_n</math><br/>(calculated in linear unit [mW] and transfer to log unit [dBm])<br/><math>EIRP_{total} = P_{total} + DG</math></li></ul>                                                                 |
| <input checked="" type="checkbox"/> For radiated measurement.                                                                                          |                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                        | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"</li></ul>                                                                                                                                                                                                                         |
|                                                                                                                                                        | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                                                                                                                                                                                                                                                  |
|                                                                                                                                                        | <ul style="list-style-type: none"><li>Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.</li></ul>                                                                                                                                                                                                                                                         |

### 3.3.4 Test Setup

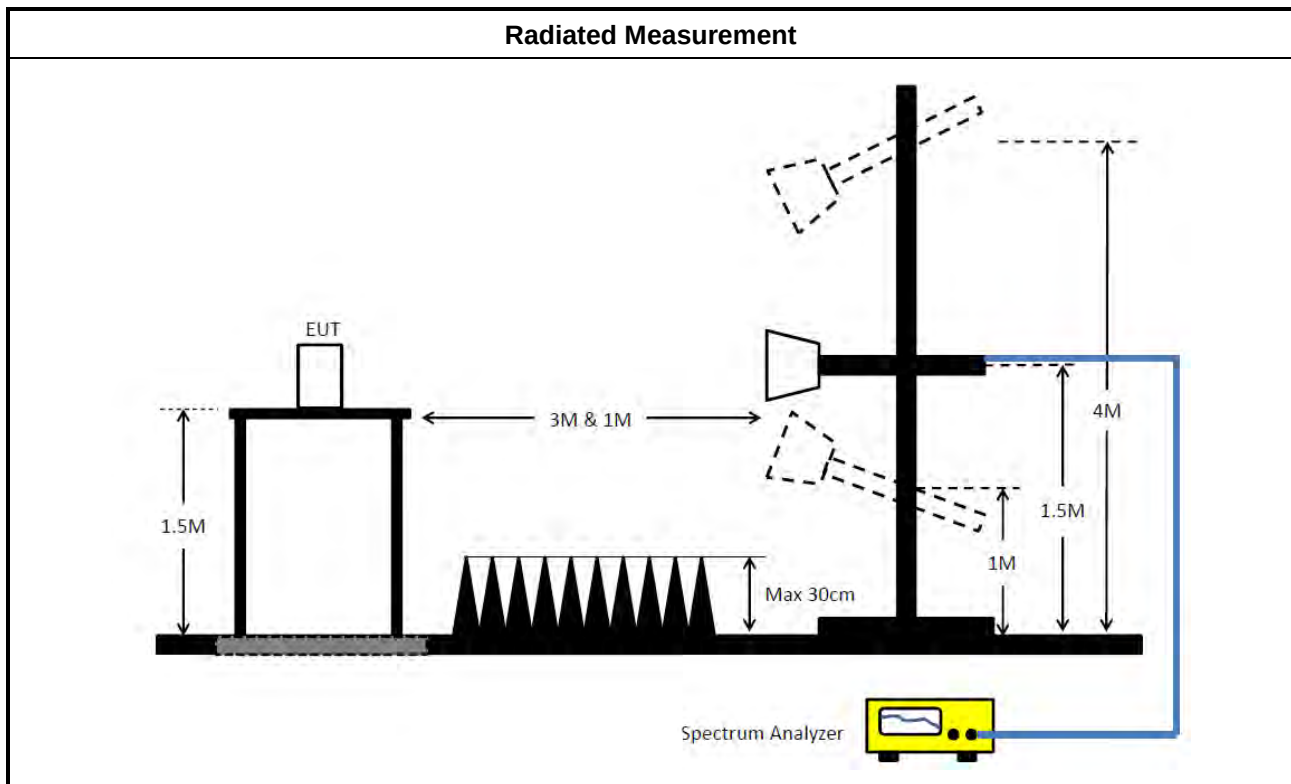

### 3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



### 3.4 Peak Power Spectral Density (E.I.R.P.)

#### 3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

| Peak Power Spectral Density (E.I.R.P.) Limit                        |                                                                                          |
|---------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                 |                                                                                          |
| <input checked="" type="checkbox"/> For the 5.925 ~ 6.425 GHz band: |                                                                                          |
|                                                                     | ■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.    |
|                                                                     | ■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.                                     |
|                                                                     | ■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.    |
|                                                                     | ■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.        |
|                                                                     | ■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.                                  |
| <input checked="" type="checkbox"/> For the 6.425 ~ 6.525 GHz band: |                                                                                          |
|                                                                     | ■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.                                     |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.        |
|                                                                     | ■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.                                  |
| <input checked="" type="checkbox"/> For the 6.525 ~ 6.875 GHz band: |                                                                                          |
|                                                                     | ■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.    |
|                                                                     | ■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.                                     |
|                                                                     | ■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.    |
|                                                                     | ■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.        |
|                                                                     | ■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.                                  |
| <input checked="" type="checkbox"/> For the 6.875 ~ 7.125 GHz band: |                                                                                          |
|                                                                     | ■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.                                     |
|                                                                     | ■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.        |
|                                                                     | ■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.                                  |
| <b>RLAN Devices</b>                                                 |                                                                                          |
| <input type="checkbox"/> For the 5.925 ~ 7.125 GHz band:            |                                                                                          |
|                                                                     | ■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.         |
|                                                                     | ■ For low-power client devices < -1 dBm / MHz.                                           |
|                                                                     | ■ For very low-power devices < -5 dBm / MHz.                                             |
| <input type="checkbox"/> For the 5.925 ~ 6.875 GHz band:            |                                                                                          |
|                                                                     | ■ For standard-power access points & fixed client devices < 23 dBm / MHz.                |
|                                                                     | ■ For standard client devices < 17 dBm / MHz.                                            |



### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li></ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <input type="checkbox"/> For conducted measurement.                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>If the EUT supports multiple transmit chains using options given below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"><li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/><math display="block">PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math><br/>(calculated in linear unit [mW] and transfer to log unit [dBm])<br/><math display="block">EIRP_{total} = PPSD_{total} + DG</math></li></ul>                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                                     |                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | For radiated measurement.                                                                                                                                                                                                                                                                         |
|                                     | <ul style="list-style-type: none"> <li>Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"</li> <li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> <li>Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.</li> </ul> |

### 3.4.4 Test Setup

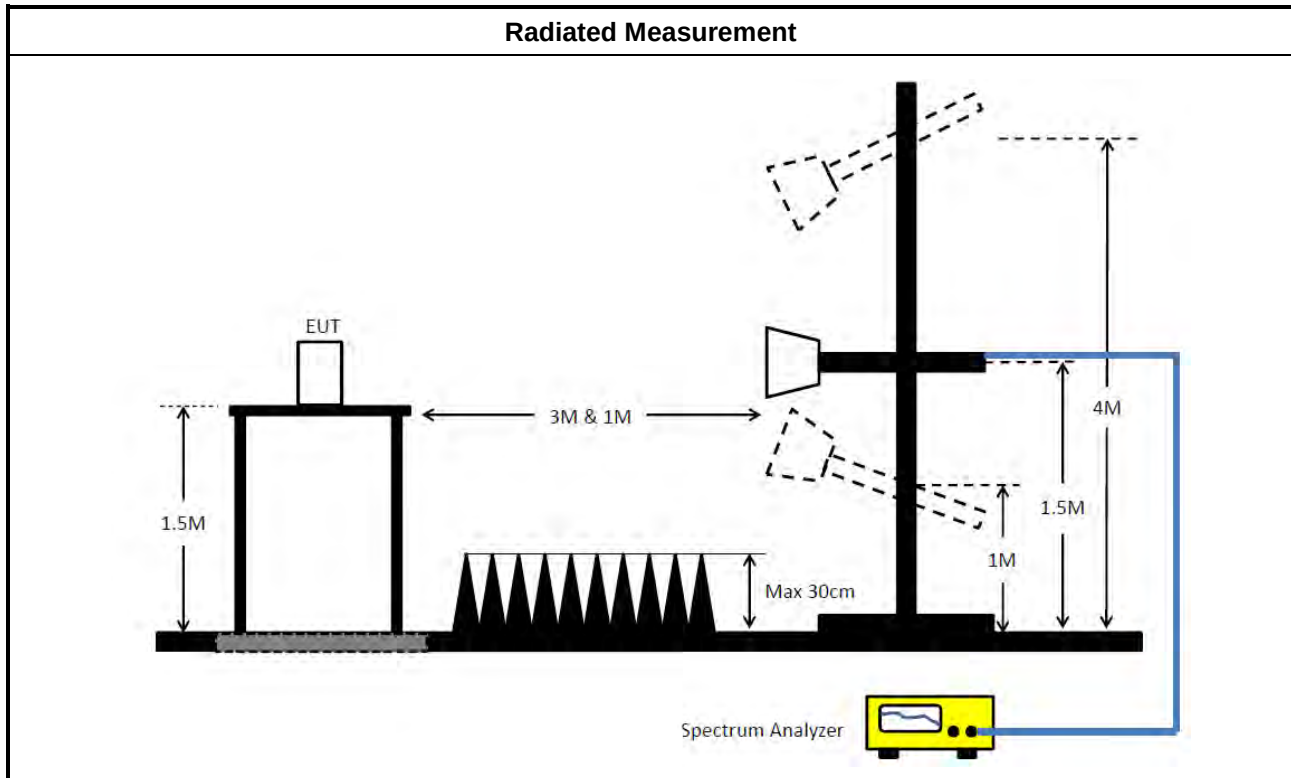

### 3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Unwanted Emissions Limit


| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m( $20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$ ).  
EX. Above 18GHz emission limit calculation (3m to 1m) =  $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$ .

| Un-restricted band emissions above 1GHz Limit |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency                                     | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Any outside the 5.925 – 7.125 GHz emission    | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]<br><br>Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m( $20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$ ).<br>EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$ .<br><br>Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit. |
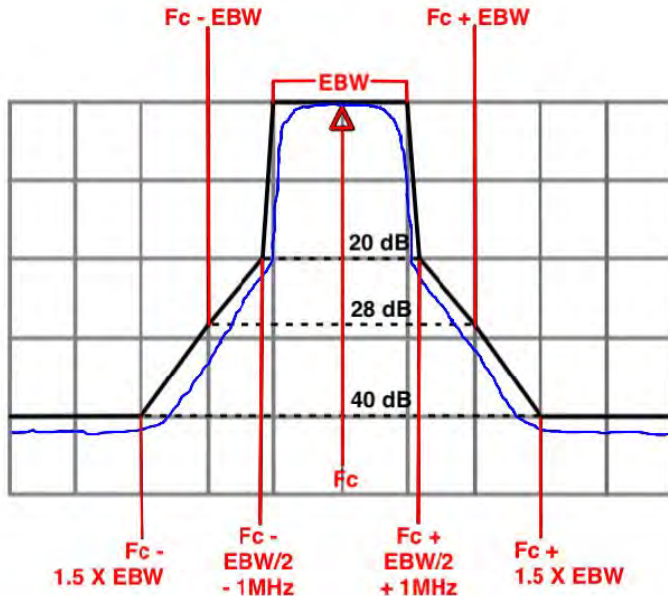
| Frequency         | Emission MASK Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.925 – 7.125 GHz | <p>Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.</p>  |




### 3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK).<br/>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li></ul> |                                                                                                                                                                              |
| <ul style="list-style-type: none"><li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                              |
| <ul style="list-style-type: none"><li>For the transmitter unwanted emissions shall be measured using following options below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.</li></ul>                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.</li></ul>                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).<br>(For unrestricted band measurement)                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.( For restricted band average measurement) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.                                                               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.                                                                            |
| <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                              |
| <ul style="list-style-type: none"><li>For emission MASK shall be measured using following options below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as FCC KDB 987594 D02, J) In-Band Emissions                                                                                        |
| <ul style="list-style-type: none"><li>For radiated measurement.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li></ul>                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li></ul>                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                                                          |
| <ul style="list-style-type: none"><li>The any unwanted emissions level shall not exceed the fundamental emission level.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                              |
| <ul style="list-style-type: none"><li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                              |

### 3.5.4 Test Setup

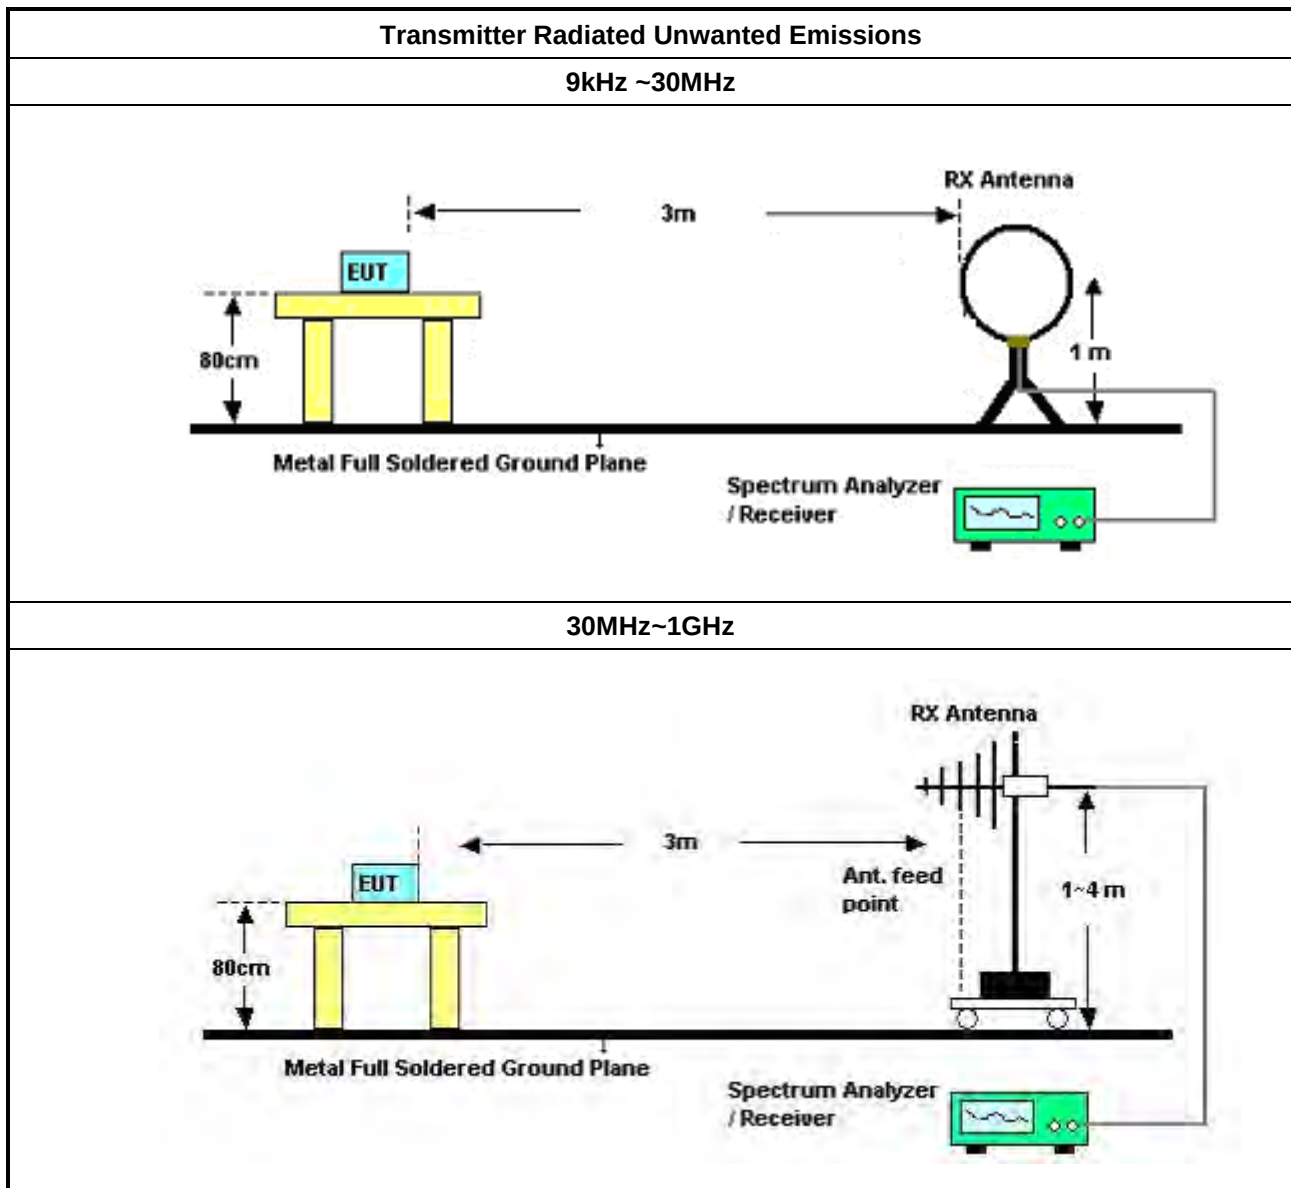

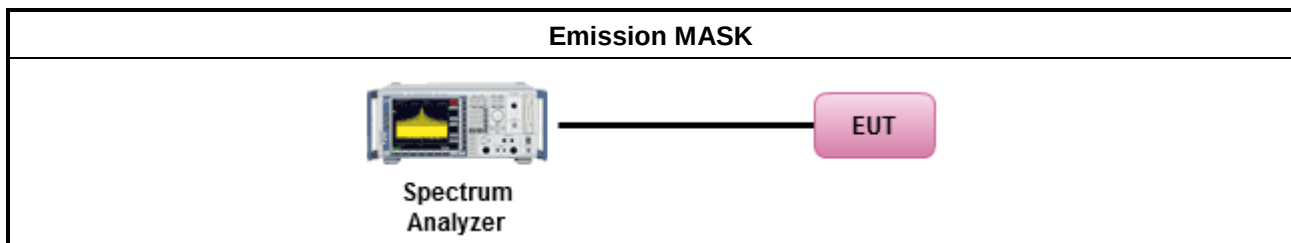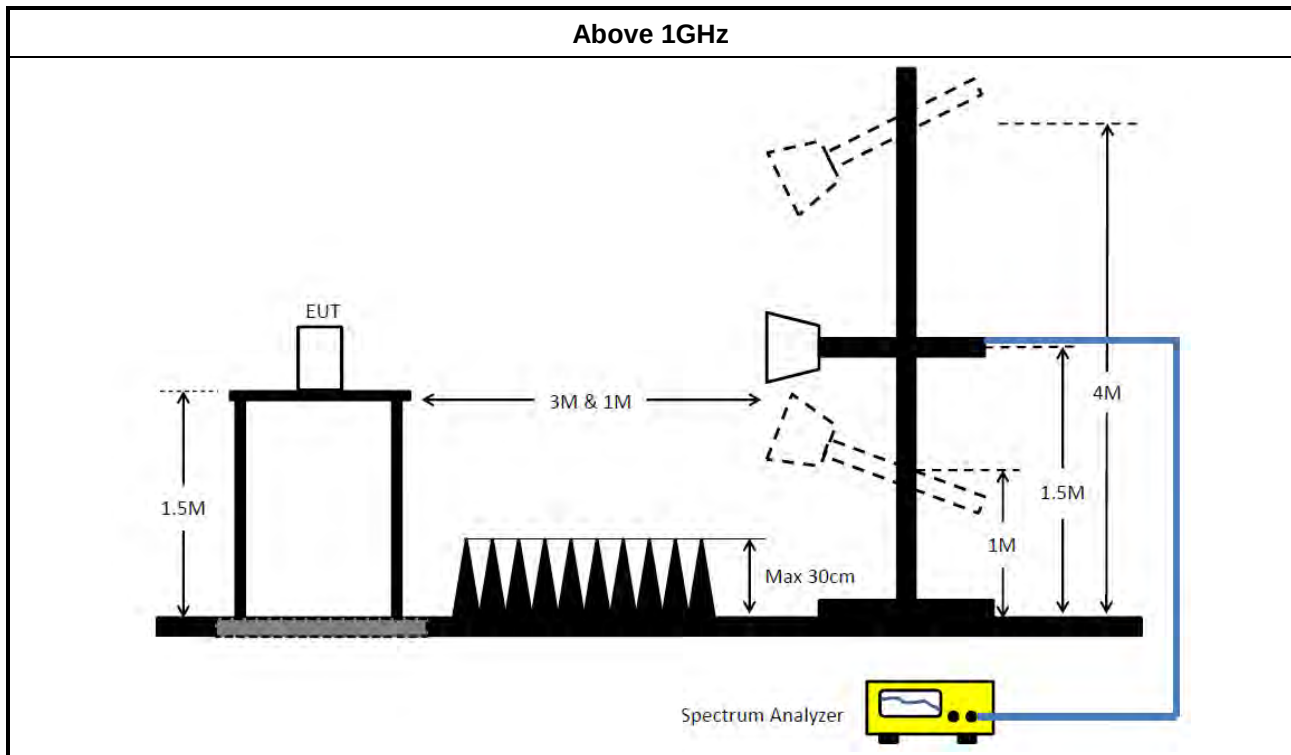

### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)  
= Level

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

### 3.6 Contention Based Protocol

#### 3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures

| Test Method                         |                                                                                |
|-------------------------------------|--------------------------------------------------------------------------------|
| ■                                   | For Contention Based Protocol shall be measured using following options below: |
| <input checked="" type="checkbox"/> | Refer as FCC KDB 987594 D02, I) Contention Based Protocol.                     |

#### 3.6.4 Test Setup

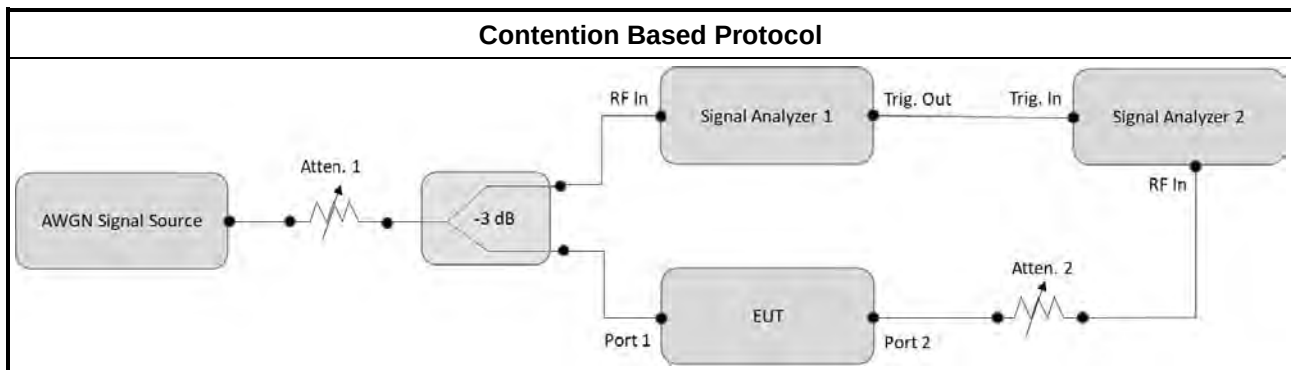

#### 3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



## 4 Test Equipment and Calibration Data

| Instrument                        | Brand        | Model No.          | Serial No.       | Characteristics | Calibration Date | Calibration Due Date | Remark                |
|-----------------------------------|--------------|--------------------|------------------|-----------------|------------------|----------------------|-----------------------|
| EMI Test Receiver                 | Agilent      | N9038A             | MY52260140       | 9kHz ~ 8.4GHz   | Jun. 06, 2026    | Jun. 05, 2027        | Conduction (CO02-CB)  |
| COND Cable                        | Woken        | Cable              | CO02             | 0.15MHz ~ 30MHz | Sep. 14, 2025    | Sep. 13, 2026        | Conduction (CO02-CB)  |
| LISN                              | Schwarzbeck  | NSLK 8127          | 8127478          | 9kHz ~ 30MHz    | Jan. 29, 2026    | Jan. 28, 2027        | Conduction (CO02-CB)  |
| LISN                              | Schwarzbeck  | NSLK 8127          | 8127650          | 9kHz ~ 30MHz    | Feb. 25, 2026    | Feb. 24, 2027        | Conduction (CO02-CB)  |
| Pulse Limiter                     | Schwarzbeck  | VTSD 9561F-N       | 00378            | 9kHz ~ 30MHz    | Sep. 14, 2025    | Sep. 13, 2026        | Conduction (CO02-CB)  |
| Test Software                     | SPORTON      | SENSE-EMI          | V5.11            | 150kHz-30MHz    | N.C.R.           | N.C.R.               | Conduction (CO02-CB)  |
| Loop Antenna                      | Teseq        | HLA 6121           | 65417            | 9kHz - 30MHz    | Oct. 20, 2025    | Oct. 19, 2026        | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber NSA      | TDK          | SAC-3M             | 03CH05-CB        | 30 MHz ~ 1 GHz  | Jul. 31, 2025    | Jul. 30, 2026        | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber NSA      | TDK          | SAC-3M             | 03CH05-CB        | 30 MHz ~ 1 GHz  | Jul. 30, 2026    | Jul. 29, 2027        | Radiation (03CH05-CB) |
| RF Cable-low                      | Woken        | RG402              | Low Cable-04+23  | 30MHz~1GHz      | Sep. 25, 2025    | Sep. 24, 2026        | Radiation (03CH05-CB) |
| Amplifier                         | EMCI         | EMC330N            | 980331           | 20MHz ~ 3GHz    | Apr. 30, 2026    | Apr. 29, 2027        | Radiation (03CH05-CB) |
| Bilog Antenna with 6dB Attenuator | TESEQ & EMCI | CBL 6112D & N-6-06 | 35236 & AT-N0610 | 30MHz ~ 2GHz    | Mar. 21, 2026    | Mar. 20, 2027        | Radiation (03CH05-CB) |
| EMI Test Receiver                 | R&S          | ESR7               | 102172           | 9kHz ~ 7GHz     | Oct. 29, 2025    | Oct. 28, 2026        | Radiation (03CH05-CB) |
| Spectrum Analyzer                 | R&S          | FSP40              | 100304           | 9kHz ~ 40GHz    | May. 08, 2026    | May. 07, 2027        | Radiation (03CH05-CB) |
| Test Software                     | SPORTON      | SENSE-EMI          | V5.11.10         | 30MHz-40GHz     | N.C.R.           | N.C.R.               | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber VSWR     | TDK          | SAC-3M             | 03CH01-CB        | 1GHz ~18GHz 3m  | May. 02, 2026    | May. 01, 2027        | Radiation (03CH01-CB) |
| RF Cable-high                     | Woken        | RG402              | High Cable-16    | 1 GHz ~ 18 GHz  | Sep. 25, 2025    | Sep. 24, 2026        | Radiation (03CH01-CB) |
| RF Cable-high                     | Woken        | RG402              | High Cable-16+17 | 1 GHz ~ 18 GHz  | Jan. 26, 2026    | Jan. 25, 2027        | Radiation (03CH01-CB) |



| Instrument                    | Brand       | Model No.        | Serial No.          | Characteristics  | Calibration Date | Calibration Due Date | Remark                   |
|-------------------------------|-------------|------------------|---------------------|------------------|------------------|----------------------|--------------------------|
| High Cable                    | Woken       | WCA0929M         | 40G#5+6             | 1GHz ~ 40 GHz    | Feb. 11, 2026    | Feb. 10, 2027        | Radiation<br>(03CH01-CB) |
| Pre-Amplifier                 | Agilent     | 8449B            | 3008A02121          | 1GHz ~ 26.5GHz   | May. 15, 2026    | May. 14, 2027        | Radiation<br>(03CH01-CB) |
| Pre-Amplifier                 | SGH         | SGH184           | 20221107-3          | 18GHz ~ 40GHz    | Nov. 21, 2025    | Nov. 20, 2026        | Radiation<br>(03CH01-CB) |
| Horn Antenna                  | SCHWARZBECK | BBHA 9120 D      | BBHA<br>9120D-01816 | 1GHz~18GHz       | Dec. 31, 2025    | Dec. 30, 2026        | Radiation<br>(03CH01-CB) |
| Horn Antenna                  | Schwarzbeck | BBHA 9170        | BBHA9170252         | 15GHz ~ 40GHz    | Oct. 07, 2025    | Oct. 06, 2026        | Radiation<br>(03CH01-CB) |
| Signal Analyzer               | R&S         | FSV3044          | 101437              | 10kHz ~ 44GHz    | Dec. 12, 2025    | Dec. 11, 2026        | Radiation<br>(03CH01-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-01              | 1GHz ~ 7.4GHz    | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH01-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-02              | 1GHz ~ 8GHz      | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH01-CB) |
| Test Software                 | SPORTON     | SENSE-15407_NII  | V5.11. 27           | 5.15GHz-7.115GHz | N.C.R.           | N.C.R.               | Radiation<br>(03CH01-CB) |
| 3m Semi Anechoic Chamber VSWR | RIKEN       | SAC-3M           | 03CH02-CB           | 1GHz ~18GHz      | Mar. 21, 2026    | Mar. 20, 2027        | Radiation<br>(03CH02-CB) |
| RF Cable-high                 | Woken       | RG402            | High Cable-18       | 1GHz ~ 18GHz     | Jun. 18, 2026    | Jun. 17, 2027        | Radiation<br>(03CH02-CB) |
| RF Cable-high                 | Woken       | RG402            | High Cable-18+19    | 1GHz ~ 18GHz     | Jun. 18, 2026    | Jun. 17, 2027        | Radiation<br>(03CH02-CB) |
| High Cable                    | Woken       | WCA0929M         | 40G#5+6             | 1GHz ~ 40 GHz    | Feb. 11, 2026    | Feb. 10, 2027        | Radiation<br>(03CH02-CB) |
| Pre-Amplifier                 | Agilent     | 83017A           | MY39501305          | 1GHz ~ 26.5GHz   | Jun. 27, 2026    | Jun. 26, 2027        | Radiation<br>(03CH02-CB) |
| Pre-Amplifier                 | SGH         | SGH184           | 20221107-3          | 18GHz ~ 40GHz    | Nov. 21, 2025    | Nov. 20, 2026        | Radiation<br>(03CH02-CB) |
| Horn Antenna                  | EMCO        | 3115             | 9610-4976           | 1GHz ~ 18GHz     | Apr. 24, 2026    | Apr. 23, 2027        | Radiation<br>(03CH02-CB) |
| Horn Antenna                  | Schwarzbeck | BBHA 9170        | BBHA9170252         | 15GHz ~ 40GHz    | Oct. 07, 2025    | Oct. 06, 2026        | Radiation<br>(03CH02-CB) |
| Signal Analyzer               | R&S         | FSV3044          | 101536              | 10kHz ~ 44GHz    | Aug. 20, 2025    | Aug. 19, 2026        | Radiation<br>(03CH02-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-01              | 1GHz ~ 7.4GHz    | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH02-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-02              | 1GHz ~ 8GHz      | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH02-CB) |
| Test Software                 | SPORTON     | SENSE-15407_NII  | V5.11. 27           | 5.15GHz-7.115GHz | N.C.R.           | N.C.R.               | Radiation<br>(03CH02-CB) |



| Instrument                    | Brand       | Model No.        | Serial No.       | Characteristics   | Calibration Date | Calibration Due Date | Remark                   |
|-------------------------------|-------------|------------------|------------------|-------------------|------------------|----------------------|--------------------------|
| 3m Semi Anechoic Chamber VSWR | TDK         | SAC-3M           | 03CH06-CB        | 1GHz ~18GHz<br>3m | Oct 07, 2025     | Oct 06, 2026         | Radiation<br>(03CH06-CB) |
| RF Cable-high                 | Woken       | RG402            | High Cable-05+68 | 1GHz~18GHz        | Sep 25, 2025     | Sep 24, 2026         | Radiation<br>(03CH06-CB) |
| High Cable                    | Woken       | WCA0929M         | 40G#5+6          | 1GHz ~ 40 GHz     | Feb 11, 2026     | Feb 10, 2027         | Radiation<br>(03CH06-CB) |
| Pre-Amplifier                 | EMCI        | EMC12630SE       | 980383           | 1GHz ~ 18GHz      | Jul 30, 2025     | Jul 29, 2026         | Radiation<br>(03CH06-CB) |
| Pre-Amplifier                 | EMCI        | EMC12630SE       | 980383           | 1GHz ~ 18GHz      | Jul 29, 2026     | Jul 28, 2027         | Radiation<br>(03CH06-CB) |
| Pre-Amplifier                 | SGH         | SGH184           | 20221107-3       | 18GHz ~ 40GHz     | Nov 21, 2025     | Nov 20, 2026         | Radiation<br>(03CH06-CB) |
| Horn Antenna                  | SCHWARZBECK | BBHA9120D        | BBHA 9120D-1292  | 1GHz~18GHz        | Aug 22, 2025     | Aug 21, 2026         | Radiation<br>(03CH06-CB) |
| Horn Antenna                  | Schwarzbeck | BBHA 9170        | BBHA9170252      | 15GHz ~ 40GHz     | Oct 07, 2025     | Oct 06, 2026         | Radiation<br>(03CH06-CB) |
| Signal analyzer               | R&S         | FSV3044          | 101667           | 9kHz~44GHz        | Aug 27, 2025     | Aug 26, 2026         | Radiation<br>(03CH06-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-01           | 1GHz ~ 7.4GHz     | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH06-CB) |
| Band Rejector                 | MTJ         | 6G Band Rejector | BRJ-02           | 1GHz ~ 8GHz       | Sep 10, 2025     | Sep 09, 2026         | Radiation<br>(03CH06-CB) |
| Test Software                 | SPORTON     | SENSE-15407_NII  | V5.11. 27        | 5.15GHz-7.115GHz  | N.C.R.           | N.C.R.               | Radiation<br>(03CH06-CB) |
| Signal Analyzer               | R&S         | FSV40            | 101903           | 9kHz ~ 40GHz      | Jun. 30, 2026    | Jun. 29, 2027        | Conducted<br>(TH01-CB)   |
| Switch                        | SPTCB       | SP-SWI           | SWI-01           | 1~18 GHz          | Sep. 20, 2025    | Sep. 19, 2026        | Conducted<br>(TH01-CB)   |
| RF Cable-high                 | Woken       | RG402            | High Cable-06    | 1 GHz – 18 GHz    | Sep. 30, 2025    | Sep. 29, 2026        | Conducted<br>(TH01-CB)   |
| RF Cable-high                 | Woken       | RG402            | High Cable-07    | 1 GHz – 18 GHz    | Sep. 30, 2025    | Sep. 29, 2026        | Conducted<br>(TH01-CB)   |
| RF Cable-high                 | Woken       | RG402            | High Cable-08    | 1 GHz – 18 GHz    | Sep. 30, 2025    | Sep. 29, 2026        | Conducted<br>(TH01-CB)   |
| RF Cable-high                 | Woken       | RG402            | High Cable-09    | 1 GHz – 18 GHz    | Sep. 30, 2025    | Sep. 29, 2026        | Conducted<br>(TH01-CB)   |
| RF Cable-high                 | Woken       | RG402            | High Cable-10    | 1 GHz – 18 GHz    | Sep. 30, 2025    | Sep. 29, 2026        | Conducted<br>(TH01-CB)   |
| Power Sensor                  | Agilent     | E9327A           | US40442088       | 50MHz~18GHz       | Jul. 07, 2026    | Jul. 06, 2027        | Conducted<br>(TH01-CB)   |
| Power Meter                   | Agilent     | E4416A           | MY45100745       | 50MHz~18GHz       | Jun. 24, 2026    | Jun. 23, 2027        | Conducted<br>(TH01-CB)   |
| Test Software                 | SPORTON     | SENSE-15407_NII  | V5.11. 27        | 5.15GHz-7.115GHz  | N.C.R.           | N.C.R.               | Conducted<br>(TH01-CB)   |



| Instrument              | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark              |
|-------------------------|-------|-----------|------------|-----------------|------------------|----------------------|---------------------|
| RF Cable-high           | Woken | RG402     | Cable-60   | 1~18 GHz        | Sep 30, 2025     | Sep 29, 2026         | Conducted (DF02-CB) |
| RF Cable-high           | Woken | RG402     | Cable-61   | 1~18 GHz        | Sep 30, 2025     | Sep 29, 2026         | Conducted (DF02-CB) |
| RF Cable-high           | Woken | RG402     | Cable-63   | 1~18 GHz        | Sep 30, 2025     | Sep 29, 2026         | Conducted (DF02-CB) |
| Spectrum Analyzer       | R&S   | FSV40     | 101025     | 9kHz ~ 40GHz    | Nov 12, 2025     | Nov 11, 2026         | Conducted (DF02-CB) |
| RF Power Divider        | STI   | 2 Way     | DV-8G -05  | 1 ~ 8GHz        | Sep 20, 2025     | Sep 19, 2026         | Conducted (DF02-CB) |
| RF Power Divider        | STI   | 2 Way     | DV-8G -06  | 1 ~ 8GHz        | Sep 20, 2025     | Sep 19, 2026         | Conducted (DF02-CB) |
| RF Power Divider        | STI   | 2 Way     | DV-8G -07  | 1 ~ 8GHz        | Sep 20, 2025     | Sep 19, 2026         | Conducted (DF02-CB) |
| RF Power Divider        | STI   | 2 Way     | DV-8G -08  | 1 ~ 8GHz        | Sep 20, 2025     | Sep 19, 2026         | Conducted (DF02-CB) |
| RF Power Divider        | Woken | 4 Way     | DF02-DV02  | 1 ~ 6GHz        | Sep. 20, 2025    | Sep. 19, 2026        | Conducted (DF02-CB) |
| RF Power Divider        | Woken | 4 Way     | DF02-DV04  | 1 ~ 6GHz        | Sep. 20, 2025    | Sep. 19, 2026        | Conducted (DF02-CB) |
| RF Power Divider        | Woken | 4 Way     | DF02-DV05  | 1 ~ 6GHz        | Sep. 20, 2025    | Sep. 19, 2026        | Conducted (DF02-CB) |
| Vector Signal Generator | R&S   | SMM100A   | 101894     | 100kHz ~ 7.5GHz | Nov 04, 2025     | Nov 03, 2026         | Conducted (DF02-CB) |

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




## Conducted Emissions at Powerline

## Appendix A

### Summary


| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Condition |
|--------|--------|------|--------------|-----------------|-----------------|----------------|-----------|
| Mode 1 | Pass   | AV   | 762k         | 35.04           | 46.00           | -10.96         | Line      |

### Mode 1

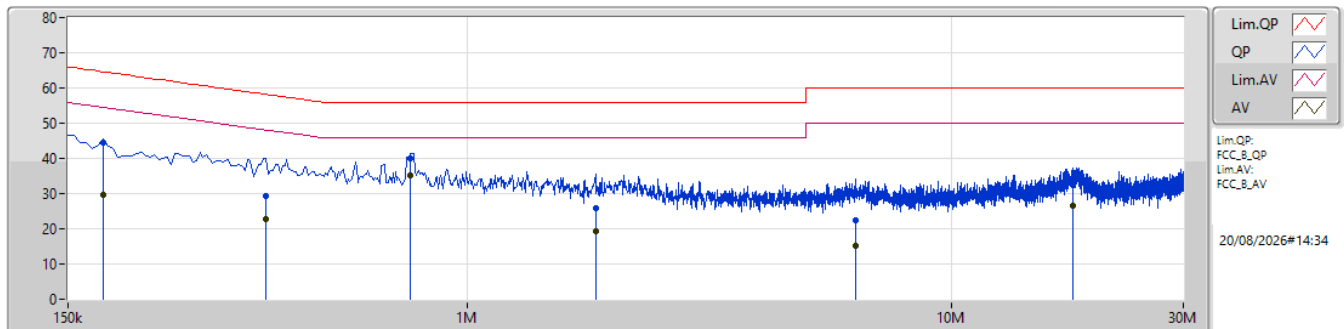

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|--|--|--|
| QP   | 177k         | 44.58           | 64.62           | -20.04         | 10.37          | Line      | -       | 34.21         | 0.12         | 0.23       | 10.02      |  |  |  |  |  |  |
| AV   | 177k         | 29.52           | 54.62           | -25.10         | 10.37          | Line      | -       | 19.15         | 0.12         | 0.23       | 10.02      |  |  |  |  |  |  |
| QP   | 384k         | 29.46           | 58.20           | -28.74         | 10.48          | Line      | -       | 18.98         | 0.12         | 0.28       | 10.08      |  |  |  |  |  |  |
| AV   | 384k         | 22.61           | 48.20           | -25.59         | 10.48          | Line      | -       | 12.13         | 0.12         | 0.28       | 10.08      |  |  |  |  |  |  |
| QP   | 762k         | 39.88           | 56.00           | -16.12         | 10.53          | Line      | -       | 29.35         | 0.16         | 0.25       | 10.12      |  |  |  |  |  |  |
| AV   | 762k         | 35.04           | 46.00           | -10.96         | 10.53          | Line      | "Worst" | 24.51         | 0.16         | 0.25       | 10.12      |  |  |  |  |  |  |
| QP   | 1.842M       | 25.95           | 56.00           | -30.05         | 10.49          | Line      | -       | 15.46         | 0.22         | 0.26       | 10.01      |  |  |  |  |  |  |
| AV   | 1.842M       | 19.31           | 46.00           | -26.69         | 10.49          | Line      | -       | 8.82          | 0.22         | 0.26       | 10.01      |  |  |  |  |  |  |
| QP   | 6.311M       | 22.55           | 60.00           | -37.45         | 10.95          | Line      | -       | 11.60         | 0.49         | 0.32       | 10.14      |  |  |  |  |  |  |
| AV   | 6.311M       | 15.25           | 50.00           | -34.75         | 10.95          | Line      | -       | 4.30          | 0.49         | 0.32       | 10.14      |  |  |  |  |  |  |
| QP   | 17.781M      | 32.45           | 60.00           | -27.55         | 11.89          | Line      | -       | 20.56         | 1.00         | 0.35       | 10.54      |  |  |  |  |  |  |
| AV   | 17.781M      | 26.54           | 50.00           | -23.46         | 11.89          | Line      | -       | 14.65         | 1.00         | 0.35       | 10.54      |  |  |  |  |  |  |

### Mode 1

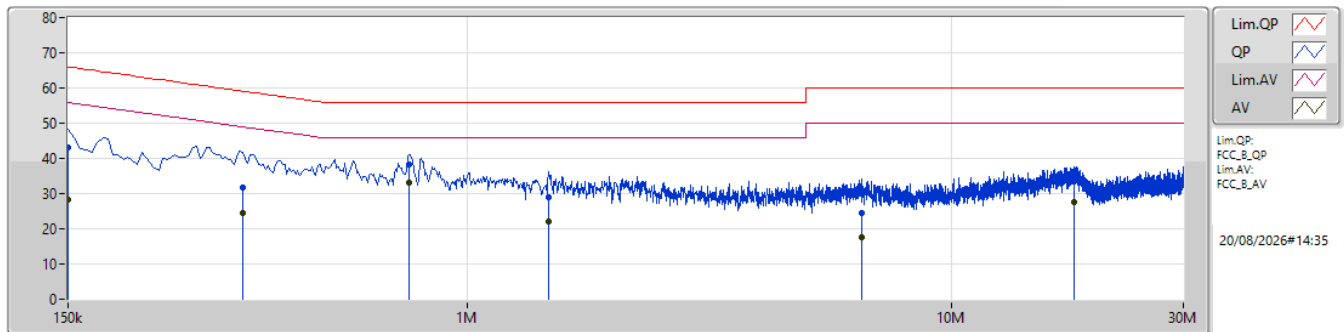

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|--|--|--|
| QP   | 150k         | 43.03           | 66.00           | -22.97         | 10.48          | Neutral   | -       | 32.55         | 0.12         | 0.27       | 10.09      |  |  |  |  |  |  |
| AV   | 150k         | 28.15           | 56.00           | -27.85         | 10.48          | Neutral   | -       | 17.67         | 0.12         | 0.27       | 10.09      |  |  |  |  |  |  |
| QP   | 343.5k       | 31.63           | 59.12           | -27.49         | 10.45          | Neutral   | -       | 21.18         | 0.13         | 0.26       | 10.06      |  |  |  |  |  |  |
| AV   | 343.5k       | 24.56           | 49.12           | -24.56         | 10.45          | Neutral   | -       | 14.11         | 0.13         | 0.26       | 10.06      |  |  |  |  |  |  |
| QP   | 757.5k       | 38.12           | 56.00           | -17.88         | 10.51          | Neutral   | -       | 27.61         | 0.14         | 0.25       | 10.12      |  |  |  |  |  |  |
| AV   | 757.5k       | 32.96           | 46.00           | -13.04         | 10.51          | Neutral   | "Worst" | 22.45         | 0.14         | 0.25       | 10.12      |  |  |  |  |  |  |
| QP   | 1.473M       | 29.05           | 56.00           | -26.95         | 10.48          | Neutral   | -       | 18.57         | 0.18         | 0.25       | 10.05      |  |  |  |  |  |  |
| AV   | 1.473M       | 22.05           | 46.00           | -23.95         | 10.48          | Neutral   | -       | 11.57         | 0.18         | 0.25       | 10.05      |  |  |  |  |  |  |
| QP   | 6.504M       | 24.65           | 60.00           | -35.35         | 10.91          | Neutral   | -       | 13.74         | 0.44         | 0.32       | 10.15      |  |  |  |  |  |  |
| AV   | 6.504M       | 17.45           | 50.00           | -32.55         | 10.91          | Neutral   | -       | 6.54          | 0.44         | 0.32       | 10.15      |  |  |  |  |  |  |
| QP   | 17.826M      | 33.38           | 60.00           | -26.62         | 11.79          | Neutral   | -       | 21.59         | 0.90         | 0.35       | 10.54      |  |  |  |  |  |  |
| AV   | 17.826M      | 27.57           | 50.00           | -22.43         | 11.79          | Neutral   | -       | 15.78         | 0.90         | 0.35       | 10.54      |  |  |  |  |  |  |

**Summary**

| Mode                            | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|---------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.925-6.425GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX        | 22.715M          | 16.751M         | 16M8D1D  | 21.12M           | 16.675M         |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 22.88M           | 19.059M         | 19M1D1D  | 21.505M          | 18.995M         |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 22.825M          | 19.074M         | 19M1D1D  | 21.67M           | 18.996M         |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 45.1M            | 38.087M         | 38M1D1D  | 41.91M           | 37.881M         |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 44M              | 37.986M         | 38M0D1D  | 41.91M           | 37.859M         |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 90.2M            | 77.711M         | 77M7D1D  | 86.02M           | 77.469M         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 88.66M           | 77.751M         | 77M8D1D  | 83.82M           | 77.478M         |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 174.24M          | 157.076M        | 157MD1D  | 165.88M          | 156.398M        |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 170.72M          | 157.1M          | 157MD1D  | 165.44M          | 156.449M        |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 338.8M           | 315.929M        | 316MD1D  | 326.48M          | 314.248M        |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 336.16M          | 316.031M        | 316MD1D  | 329.12M          | 314.29M         |
| 6.425-6.525GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX        | 22.44M           | 16.77M          | 16M8D1D  | 21.45M           | 16.67M          |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 22.935M          | 19.066M         | 19M1D1D  | 21.56M           | 18.975M         |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 22.715M          | 19.063M         | 19M1D1D  | 21.78M           | 18.976M         |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 44.22M           | 38.017M         | 38M0D1D  | 41.69M           | 37.891M         |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 43.78M           | 38.026M         | 38M0D1D  | 41.14M           | 37.882M         |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 90.42M           | 77.73M          | 77M7D1D  | 83.6M            | 77.448M         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 88.44M           | 77.705M         | 77M7D1D  | 83.82M           | 77.534M         |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 170.72M          | 157.26M         | 157MD1D  | 168.96M          | 156.632M        |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 171.6M           | 156.842M        | 157MD1D  | 167.64M          | 156.666M        |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 335.28M          | 315.41M         | 315MD1D  | 329.12M          | 314.973M        |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 334.4M           | 315.605M        | 316MD1D  | 328.24M          | 315.526M        |
| 6.525-6.875GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX        | 22.44M           | 16.798M         | 16M8D1D  | 21.505M          | 16.66M          |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 23.1M            | 19.041M         | 19M0D1D  | 21.835M          | 18.967M         |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 22.935M          | 19.038M         | 19M0D1D  | 21.395M          | 18.977M         |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 44.66M           | 38.051M         | 38M1D1D  | 42.02M           | 37.897M         |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 43.78M           | 38.044M         | 38M0D1D  | 41.25M           | 37.899M         |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 89.76M           | 77.718M         | 77M7D1D  | 83.82M           | 77.496M         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 89.54M           | 77.771M         | 77M8D1D  | 85.36M           | 77.522M         |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 172.92M          | 157.113M        | 157MD1D  | 166.76M          | 156.511M        |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 171.6M           | 157.109M        | 157MD1D  | 165M             | 156.725M        |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 335.28M          | 316.057M        | 316MD1D  | 332.64M          | 314.836M        |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 337.04M          | 315.866M        | 316MD1D  | 329.12M          | 315.041M        |
| 6.875-7.125GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX        | 22.275M          | 16.76M          | 16M8D1D  | 21.175M          | 16.647M         |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 22.605M          | 19.04M          | 19M0D1D  | 21.395M          | 18.976M         |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 23.65M           | 19.048M         | 19M0D1D  | 21.175M          | 18.996M         |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 44.11M           | 37.983M         | 38M0D1D  | 42.46M           | 37.87M          |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 43.45M           | 37.995M         | 38M0D1D  | 41.69M           | 37.926M         |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 90.64M           | 77.73M          | 77M7D1D  | 84.7M            | 77.591M         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 90.42M           | 77.702M         | 77M7D1D  | 85.14M           | 77.512M         |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 168.96M          | 157.012M        | 157MD1D  | 166.32M          | 156.691M        |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 170.72M          | 156.866M        | 157MD1D  | 167.64M          | 156.752M        |

Max-N dB = Maximum 26dB down bandwidth for other band;  
 Max-OBW = Maximum 99% occupied bandwidth;  
 Min-N dB = Maximum 26dB down bandwidth for other band;  
 Min-OBW = Minimum 99% occupied bandwidth

**Result**

| Mode                            | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 802.11a_Nss1,(6Mbps)_4TX        | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5955MHz                         | Pass   | 320M       | 21.615M          | 16.746M         | 21.12M           | 16.723M         | 21.835M          | 16.686M         | 22.55M           | 16.695M         |
| 6195MHz                         | Pass   | 320M       | 21.78M           | 16.686M         | 22.165M          | 16.675M         | 21.78M           | 16.707M         | 21.725M          | 16.706M         |
| 6415MHz                         | Pass   | 320M       | 22.715M          | 16.751M         | 21.78M           | 16.703M         | 21.89M           | 16.68M          | 21.67M           | 16.719M         |
| 6435MHz                         | Pass   | 320M       | 21.78M           | 16.732M         | 21.45M           | 16.686M         | 22M              | 16.67M          | 21.67M           | 16.754M         |
| 6475MHz                         | Pass   | 320M       | 21.78M           | 16.677M         | 22.11M           | 16.754M         | 22.22M           | 16.682M         | 22.44M           | 16.733M         |
| 6515MHz                         | Pass   | 320M       | 22.055M          | 16.681M         | 22.11M           | 16.743M         | 21.45M           | 16.711M         | 22.44M           | 16.77M          |
| 6535MHz                         | Pass   | 320M       | 21.505M          | 16.759M         | 22M              | 16.725M         | 22M              | 16.66M          | 21.725M          | 16.756M         |
| 6695MHz                         | Pass   | 320M       | 22M              | 16.737M         | 22.055M          | 16.798M         | 21.89M           | 16.678M         | 21.835M          | 16.692M         |
| 6855MHz                         | Pass   | 320M       | 21.945M          | 16.741M         | 22.44M           | 16.752M         | 22.165M          | 16.726M         | 22M              | 16.76M          |
| 6875MHz                         | Pass   | 320M       | 22.11M           | 16.68M          | 21.725M          | 16.711M         | 21.615M          | 16.677M         | 22.33M           | 16.737M         |
| 6995MHz                         | Pass   | 320M       | 21.78M           | 16.76M          | 22M              | 16.694M         | 21.615M          | 16.682M         | 21.175M          | 16.731M         |
| 7095MHz                         | Pass   | 320M       | 22.22M           | 16.706M         | 22.055M          | 16.706M         | 22.165M          | 16.695M         | 22.055M          | 16.747M         |
| 7115MHz                         | Pass   | 320M       | 22.275M          | 16.727M         | 21.23M           | 16.647M         | 22.055M          | 16.702M         | 21.56M           | 16.72M          |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5955MHz                         | Pass   | 320M       | 22.22M           | 19.015M         | 21.78M           | 19.015M         | 21.615M          | 18.999M         | 22.605M          | 19.059M         |
| 6195MHz                         | Pass   | 320M       | 22.275M          | 19.029M         | 22.605M          | 19.004M         | 22.33M           | 19.016M         | 22.385M          | 19.043M         |
| 6415MHz                         | Pass   | 320M       | 22.055M          | 19.027M         | 22.88M           | 18.995M         | 21.505M          | 19.049M         | 21.56M           | 19.012M         |
| 6435MHz                         | Pass   | 320M       | 22M              | 19.014M         | 22.275M          | 19.036M         | 22.495M          | 19.013M         | 22.22M           | 19.048M         |
| 6475MHz                         | Pass   | 320M       | 21.725M          | 19.066M         | 22.165M          | 19.023M         | 21.835M          | 19.041M         | 22.275M          | 18.999M         |
| 6515MHz                         | Pass   | 320M       | 21.835M          | 19.023M         | 22.935M          | 18.993M         | 22.22M           | 18.975M         | 21.56M           | 19.035M         |
| 6535MHz                         | Pass   | 320M       | 21.835M          | 18.988M         | 22.165M          | 19.002M         | 22M              | 18.989M         | 22.33M           | 19.003M         |
| 6695MHz                         | Pass   | 320M       | 21.945M          | 19.041M         | 22.55M           | 19.03M          | 22.44M           | 18.992M         | 22.715M          | 19.021M         |
| 6855MHz                         | Pass   | 320M       | 21.835M          | 19.008M         | 22.22M           | 19.002M         | 22.165M          | 18.992M         | 22.44M           | 19.033M         |
| 6875MHz                         | Pass   | 320M       | 22.715M          | 19.006M         | 23.1M            | 18.988M         | 21.89M           | 18.967M         | 22M              | 19.009M         |
| 6995MHz                         | Pass   | 320M       | 22.165M          | 19.023M         | 22.495M          | 19.035M         | 22.11M           | 19.024M         | 21.395M          | 18.999M         |
| 7095MHz                         | Pass   | 320M       | 21.67M           | 18.976M         | 21.89M           | 19.006M         | 22.055M          | 19.009M         | 21.78M           | 19.017M         |
| 7115MHz                         | Pass   | 320M       | 22M              | 18.991M         | 21.945M          | 19.019M         | 22.22M           | 18.99M          | 22.605M          | 19.04M          |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5965MHz                         | Pass   | 320M       | 42.68M           | 37.908M         | 45.1M            | 38.087M         | 43.12M           | 37.943M         | 44M              | 37.937M         |
| 6205MHz                         | Pass   | 320M       | 43.78M           | 38.01M          | 41.91M           | 38.046M         | 44M              | 38.009M         | 42.9M            | 37.906M         |
| 6405MHz                         | Pass   | 320M       | 42.35M           | 37.979M         | 43.34M           | 37.881M         | 42.24M           | 37.962M         | 42.57M           | 37.922M         |
| 6445MHz                         | Pass   | 320M       | 43.01M           | 37.993M         | 42.02M           | 37.929M         | 42.24M           | 37.981M         | 42.79M           | 37.911M         |
| 6485MHz                         | Pass   | 320M       | 43.12M           | 37.964M         | 43.89M           | 37.891M         | 42.68M           | 38.017M         | 42.57M           | 37.981M         |
| 6525MHz                         | Pass   | 320M       | 41.69M           | 38.011M         | 43.23M           | 37.957M         | 42.68M           | 37.977M         | 44.22M           | 37.947M         |
| 6565MHz                         | Pass   | 320M       | 43.34M           | 37.948M         | 43.67M           | 37.897M         | 43.78M           | 38.051M         | 42.57M           | 38.026M         |
| 6685MHz                         | Pass   | 320M       | 42.35M           | 37.975M         | 42.9M            | 37.929M         | 43.78M           | 37.991M         | 44.66M           | 37.98M          |
| 6845MHz                         | Pass   | 320M       | 42.9M            | 37.964M         | 42.24M           | 37.983M         | 44.11M           | 38.007M         | 43.56M           | 37.909M         |
| 6885MHz                         | Pass   | 320M       | 44M              | 37.903M         | 42.02M           | 38.002M         | 43.89M           | 38M             | 42.57M           | 37.942M         |
| 7005MHz                         | Pass   | 320M       | 42.46M           | 37.962M         | 42.57M           | 37.979M         | 44.11M           | 37.907M         | 43.01M           | 37.983M         |
| 7085MHz                         | Pass   | 320M       | 43.34M           | 37.912M         | 43.67M           | 37.981M         | 42.79M           | 37.897M         | 42.68M           | 37.87M          |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5985MHz                         | Pass   | 320M       | 88.66M           | 77.665M         | 86.46M           | 77.552M         | 86.24M           | 77.571M         | 87.56M           | 77.469M         |
| 6225MHz                         | Pass   | 320M       | 86.68M           | 77.533M         | 86.24M           | 77.703M         | 86.68M           | 77.705M         | 90.2M            | 77.596M         |
| 6385MHz                         | Pass   | 320M       | 86.46M           | 77.711M         | 86.02M           | 77.598M         | 86.68M           | 77.656M         | 90.2M            | 77.501M         |
| 6465MHz                         | Pass   | 320M       | 88.44M           | 77.634M         | 89.54M           | 77.506M         | 83.6M            | 77.601M         | 86.68M           | 77.588M         |
| 6545MHz                         | Pass   | 320M       | 86.24M           | 77.73M          | 90.42M           | 77.497M         | 87.12M           | 77.67M          | 86.46M           | 77.448M         |
| 6625MHz                         | Pass   | 320M       | 87.78M           | 77.597M         | 88.22M           | 77.512M         | 88.22M           | 77.704M         | 83.82M           | 77.506M         |
| 6705MHz                         | Pass   | 320M       | 85.36M           | 77.587M         | 84.92M           | 77.496M         | 84.48M           | 77.681M         | 87.56M           | 77.558M         |
| 6785MHz                         | Pass   | 320M       | 86.9M            | 77.578M         | 84.48M           | 77.584M         | 86.24M           | 77.718M         | 87.34M           | 77.638M         |
| 6865MHz                         | Pass   | 320M       | 87.56M           | 77.571M         | 85.58M           | 77.681M         | 89.76M           | 77.663M         | 88M              | 77.568M         |
| 6945MHz                         | Pass   | 320M       | 86.46M           | 77.591M         | 85.36M           | 77.667M         | 87.78M           | 77.73M          | 86.68M           | 77.667M         |
| 7025MHz                         | Pass   | 320M       | 84.7M            | 77.718M         | 86.24M           | 77.728M         | 86.68M           | 77.7M           | 90.64M           | 77.709M         |
| 802.11be EHT160_Nss1,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 6025MHz                         | Pass   | 320M       | 172.48M          | 156.616M        | 167.2M           | 156.536M        | 168.08M          | 156.398M        | 168.08M          | 156.606M        |


| Mode                            | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 6185MHz                         | Pass   | 320M       | 166.32M          | 156.952M        | 172.48M          | 156.803M        | 166.76M          | 157.076M        | 169.84M          | 156.769M        |
| 6345MHz                         | Pass   | 320M       | 174.24M          | 156.63M         | 172.92M          | 156.958M        | 172.48M          | 156.884M        | 165.88M          | 156.883M        |
| 6505MHz                         | Pass   | 320M       | 168.96M          | 156.827M        | 168.96M          | 156.632M        | 170.72M          | 157.26M         | 170.72M          | 156.649M        |
| 6665MHz                         | Pass   | 320M       | 172.92M          | 156.766M        | 169.84M          | 156.771M        | 170.72M          | 157.009M        | 166.76M          | 156.511M        |
| 6825MHz                         | Pass   | 320M       | 168.08M          | 156.967M        | 171.16M          | 156.992M        | 170.28M          | 157.113M        | 167.64M          | 157.02M         |
| 6985MHz                         | Pass   | 320M       | 167.64M          | 156.951M        | 167.2M           | 156.797M        | 166.32M          | 157.012M        | 168.96M          | 156.691M        |
| 802.11be EHT320_Nss1,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 6105MHz                         | Pass   | 320M       | 332.64M          | 314.815M        | 333.52M          | 314.763M        | 328.24M          | 314.623M        | 326.48M          | 314.248M        |
| 6265MHz                         | Pass   | 320M       | 338.8M           | 315.609M        | 327.36M          | 315.441M        | 330M             | 314.938M        | 332.64M          | 315.322M        |
| 6425MHz                         | Pass   | 320M       | 329.12M          | 315.435M        | 333.52M          | 315.929M        | 330M             | 315.439M        | 334.4M           | 315.328M        |
| 6585MHz                         | Pass   | 320M       | 335.28M          | 314.973M        | 329.12M          | 315.063M        | 330.88M          | 315.245M        | 332.64M          | 315.41M         |
| 6745MHz                         | Pass   | 320M       | 332.64M          | 316.057M        | 334.4M           | 315.217M        | 333.52M          | 315.671M        | 334.4M           | 315.238M        |
| 6905MHz                         | Pass   | 320M       | 333.52M          | 314.918M        | 335.28M          | 315.207M        | 333.52M          | 315.399M        | 333.52M          | 314.836M        |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5955MHz                         | Pass   | 320M       | 22.055M          | 19.029M         | 21.835M          | 19.018M         | 22.33M           | 19.028M         | 21.835M          | 19.045M         |
| 6195MHz                         | Pass   | 320M       | 22.275M          | 19.033M         | 21.67M           | 19.006M         | 21.78M           | 19.074M         | 22.22M           | 19.019M         |
| 6415MHz                         | Pass   | 320M       | 22.11M           | 19.043M         | 22.165M          | 18.996M         | 22.825M          | 19.023M         | 22.055M          | 19.055M         |
| 6435MHz                         | Pass   | 320M       | 21.78M           | 19.015M         | 22.22M           | 19.058M         | 21.78M           | 19M             | 22.055M          | 19.007M         |
| 6475MHz                         | Pass   | 320M       | 22.715M          | 19.039M         | 22.33M           | 19.02M          | 21.835M          | 19.052M         | 22.11M           | 19.043M         |
| 6515MHz                         | Pass   | 320M       | 22.44M           | 19.03M          | 22M              | 18.976M         | 22.275M          | 19.032M         | 22M              | 19.063M         |
| 6535MHz                         | Pass   | 320M       | 22.33M           | 18.996M         | 22.165M          | 18.977M         | 22.935M          | 19.02M          | 22.275M          | 19.036M         |
| 6695MHz                         | Pass   | 320M       | 22.165M          | 19.007M         | 21.78M           | 19.011M         | 21.945M          | 19.03M          | 22.275M          | 19.031M         |
| 6855MHz                         | Pass   | 320M       | 22.055M          | 19.021M         | 21.395M          | 18.999M         | 21.89M           | 19.019M         | 22.44M           | 18.993M         |
| 6875MHz                         | Pass   | 320M       | 22.44M           | 19.005M         | 21.725M          | 19.033M         | 22M              | 19.023M         | 22.385M          | 19.038M         |
| 6995MHz                         | Pass   | 320M       | 22.055M          | 19.023M         | 22.22M           | 19.01M          | 22.385M          | 19.018M         | 21.67M           | 19.031M         |
| 7095MHz                         | Pass   | 320M       | 22.055M          | 19.017M         | 21.175M          | 19.012M         | 23.65M           | 19.018M         | 21.835M          | 19.012M         |
| 7115MHz                         | Pass   | 320M       | 22.11M           | 19.027M         | 22M              | 19.048M         | 21.945M          | 19.003M         | 22.77M           | 18.996M         |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5965MHz                         | Pass   | 320M       | 42.9M            | 37.913M         | 42.68M           | 37.96M          | 43.01M           | 37.859M         | 42.02M           | 37.959M         |
| 6205MHz                         | Pass   | 320M       | 42.02M           | 37.959M         | 42.35M           | 37.865M         | 41.91M           | 37.964M         | 44M              | 37.976M         |
| 6405MHz                         | Pass   | 320M       | 43.45M           | 37.886M         | 43.23M           | 37.986M         | 42.46M           | 37.985M         | 42.02M           | 37.919M         |
| 6445MHz                         | Pass   | 320M       | 42.9M            | 37.962M         | 43.12M           | 38.025M         | 43.45M           | 38.018M         | 42.57M           | 37.928M         |
| 6485MHz                         | Pass   | 320M       | 41.14M           | 37.945M         | 43.01M           | 38.02M          | 41.69M           | 37.937M         | 42.57M           | 37.971M         |
| 6525MHz                         | Pass   | 320M       | 43.34M           | 37.986M         | 43.78M           | 37.882M         | 42.68M           | 38.026M         | 42.24M           | 37.963M         |
| 6565MHz                         | Pass   | 320M       | 43.67M           | 37.92M          | 42.35M           | 37.993M         | 43.34M           | 37.984M         | 43.12M           | 37.95M          |
| 6685MHz                         | Pass   | 320M       | 43.34M           | 37.981M         | 43.34M           | 37.927M         | 43.78M           | 37.942M         | 43.67M           | 37.968M         |
| 6845MHz                         | Pass   | 320M       | 41.25M           | 38.044M         | 42.24M           | 37.976M         | 42.13M           | 37.899M         | 43.12M           | 38.022M         |
| 6885MHz                         | Pass   | 320M       | 42.46M           | 38.033M         | 41.69M           | 37.94M          | 42.13M           | 37.939M         | 42.24M           | 37.916M         |
| 7005MHz                         | Pass   | 320M       | 42.13M           | 37.993M         | 41.69M           | 37.926M         | 43.45M           | 37.975M         | 43.01M           | 37.943M         |
| 7085MHz                         | Pass   | 320M       | 42.9M            | 37.995M         | 43.12M           | 37.942M         | 42.13M           | 37.967M         | 42.46M           | 37.963M         |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5985MHz                         | Pass   | 320M       | 86.24M           | 77.478M         | 88.66M           | 77.541M         | 85.58M           | 77.521M         | 84.7M            | 77.489M         |
| 6225MHz                         | Pass   | 320M       | 88.22M           | 77.613M         | 86.9M            | 77.687M         | 84.26M           | 77.633M         | 85.14M           | 77.64M          |
| 6385MHz                         | Pass   | 320M       | 83.82M           | 77.751M         | 88.22M           | 77.654M         | 87.34M           | 77.613M         | 86.02M           | 77.555M         |
| 6465MHz                         | Pass   | 320M       | 87.78M           | 77.598M         | 87.34M           | 77.705M         | 86.9M            | 77.586M         | 88.44M           | 77.552M         |
| 6545MHz                         | Pass   | 320M       | 86.9M            | 77.581M         | 88.44M           | 77.647M         | 83.82M           | 77.612M         | 85.8M            | 77.534M         |
| 6625MHz                         | Pass   | 320M       | 89.54M           | 77.61M          | 86.02M           | 77.659M         | 89.1M            | 77.522M         | 85.8M            | 77.594M         |
| 6705MHz                         | Pass   | 320M       | 86.24M           | 77.627M         | 85.58M           | 77.635M         | 85.8M            | 77.704M         | 87.78M           | 77.565M         |
| 6785MHz                         | Pass   | 320M       | 87.78M           | 77.588M         | 88.88M           | 77.771M         | 86.9M            | 77.687M         | 87.12M           | 77.686M         |
| 6865MHz                         | Pass   | 320M       | 86.02M           | 77.766M         | 87.12M           | 77.604M         | 87.12M           | 77.662M         | 85.36M           | 77.656M         |
| 6945MHz                         | Pass   | 320M       | 87.56M           | 77.702M         | 86.46M           | 77.512M         | 87.78M           | 77.641M         | 85.14M           | 77.579M         |
| 7025MHz                         | Pass   | 320M       | 90.42M           | 77.581M         | 87.56M           | 77.685M         | 88.44M           | 77.563M         | 86.68M           | 77.577M         |
| 802.11be EHT160_Nss4,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 6025MHz                         | Pass   | 320M       | 165.44M          | 156.563M        | 168.52M          | 156.684M        | 169.84M          | 156.66M         | 166.32M          | 156.449M        |
| 6185MHz                         | Pass   | 320M       | 169.84M          | 157.1M          | 165.44M          | 156.909M        | 168.52M          | 156.79M         | 170.72M          | 156.811M        |
| 6345MHz                         | Pass   | 320M       | 166.76M          | 157.067M        | 166.32M          | 156.834M        | 168.96M          | 156.781M        | 168.08M          | 156.688M        |

| Mode                            | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 6505MHz                         | Pass   | 320M       | 171.6M           | 156.666M        | 170.28M          | 156.789M        | 167.64M          | 156.842M        | 168.96M          | 156.836M        |
| 6665MHz                         | Pass   | 320M       | 165M             | 156.963M        | 166.32M          | 157.109M        | 167.64M          | 156.807M        | 168.08M          | 156.814M        |
| 6825MHz                         | Pass   | 320M       | 167.64M          | 156.879M        | 168.52M          | 157.064M        | 171.6M           | 156.88M         | 166.32M          | 156.725M        |
| 6985MHz                         | Pass   | 320M       | 167.64M          | 156.752M        | 170.72M          | 156.866M        | 169.84M          | 156.753M        | 169.84M          | 156.85M         |
| 802.11be EHT320_Nss4,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 6105MHz                         | Pass   | 320M       | 336.16M          | 314.917M        | 329.12M          | 314.588M        | 329.12M          | 314.676M        | 330M             | 314.29M         |
| 6265MHz                         | Pass   | 320M       | 330M             | 315.238M        | 330.88M          | 315.279M        | 335.28M          | 315.496M        | 332.64M          | 315.728M        |
| 6425MHz                         | Pass   | 320M       | 334.4M           | 315.738M        | 330.88M          | 316.031M        | 330M             | 315.469M        | 333.52M          | 315.499M        |
| 6585MHz                         | Pass   | 320M       | 334.4M           | 315.529M        | 329.12M          | 315.543M        | 331.76M          | 315.526M        | 328.24M          | 315.605M        |
| 6745MHz                         | Pass   | 320M       | 337.04M          | 315.445M        | 336.16M          | 315.336M        | 333.52M          | 315.866M        | 329.12M          | 315.567M        |
| 6905MHz                         | Pass   | 320M       | 334.4M           | 315.32M         | 330M             | 315.142M        | 335.28M          | 315.863M        | 334.4M           | 315.041M        |


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
Port X-OBW = Port X 99% occupied bandwidth

**5.925-6.425GHz\_802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5955MHz**

05/08/2026

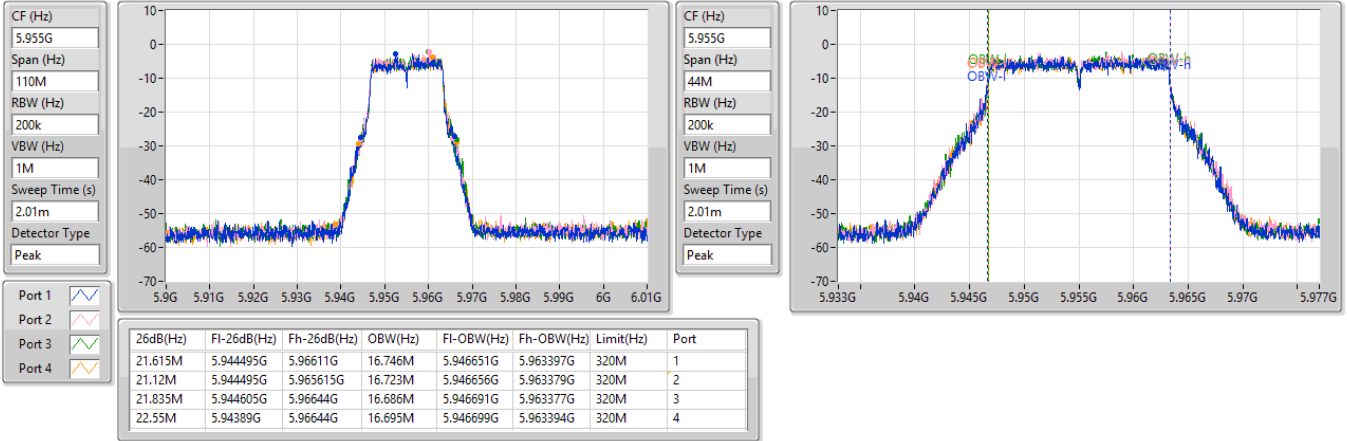
**5.925-6.425GHz\_802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**6195MHz**

05/08/2026


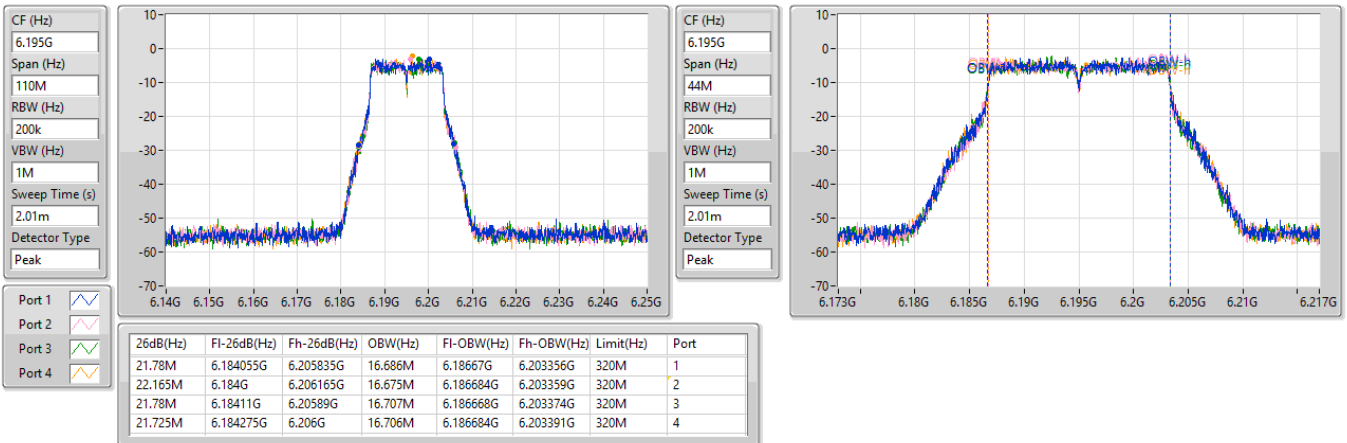


## 5.925-6.425GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6415MHz

05/08/2026

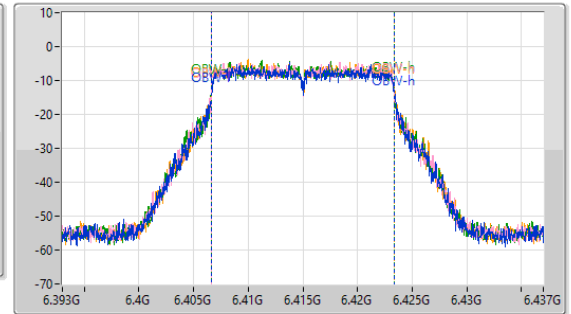
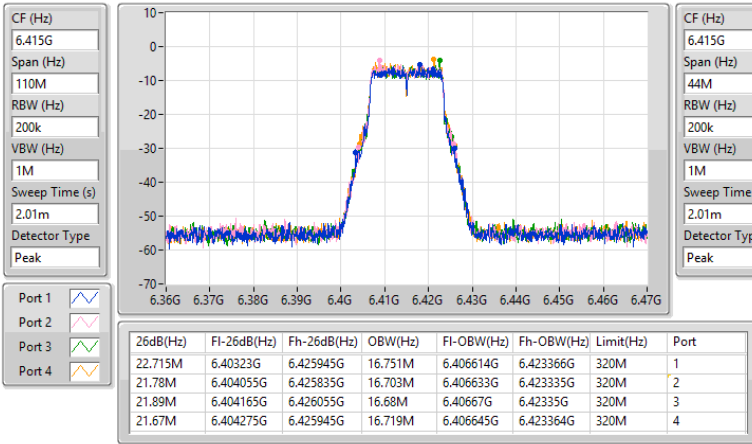


## 6.425-6.525GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6435MHz

05/08/2026

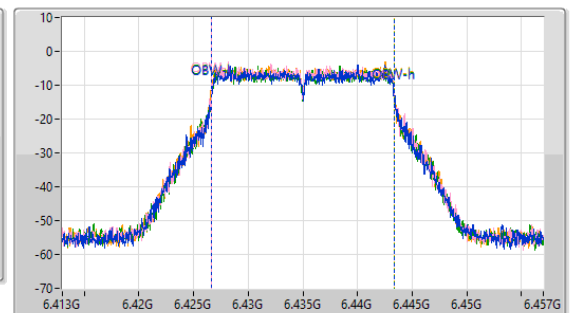
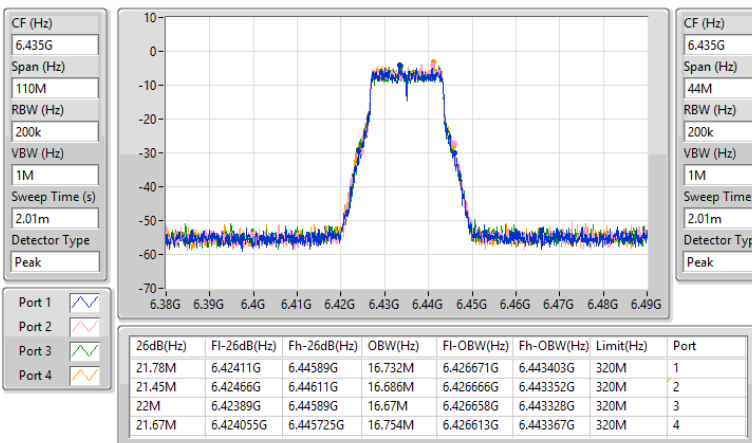


## 6.425-6.525GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6475MHz

05/08/2026

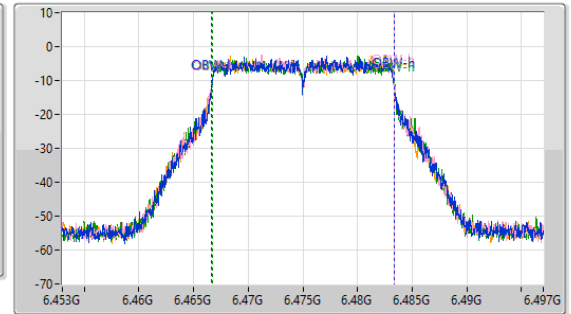
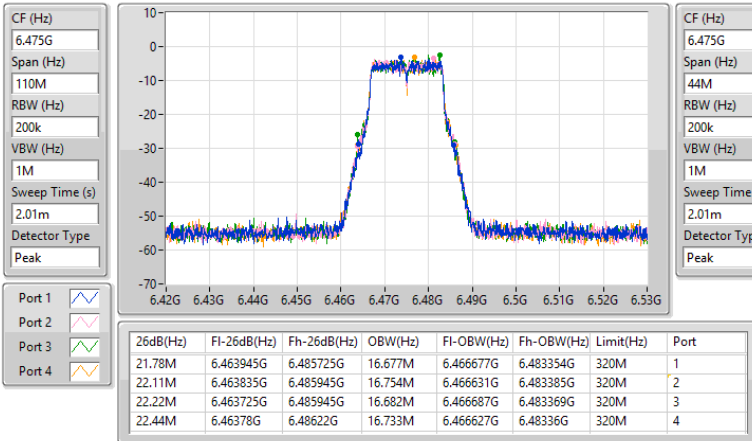


## 6.425-6.525GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW



6515MHz

05/08/2026

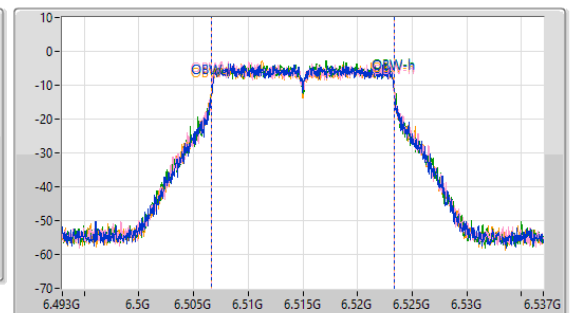
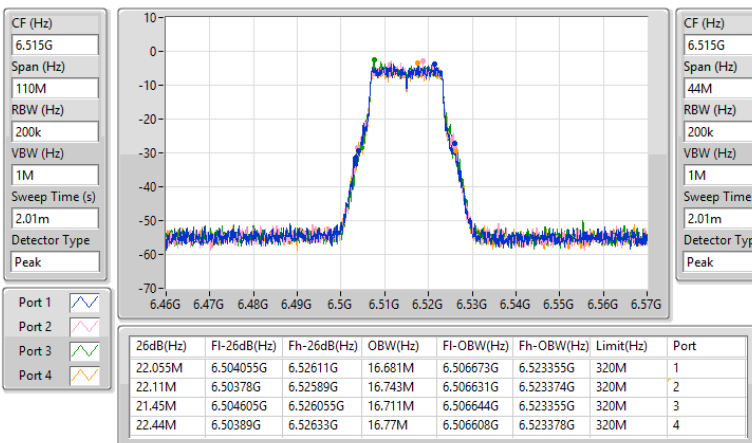


**6.525-6.875GHz\_802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**6535MHz**

05/08/2026

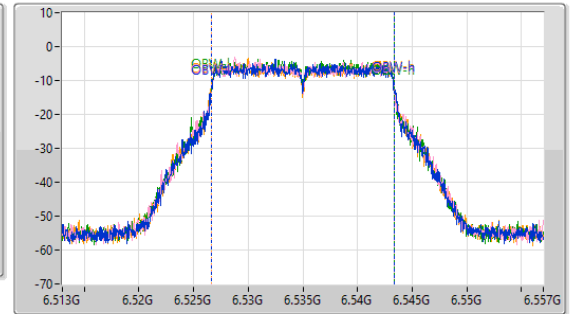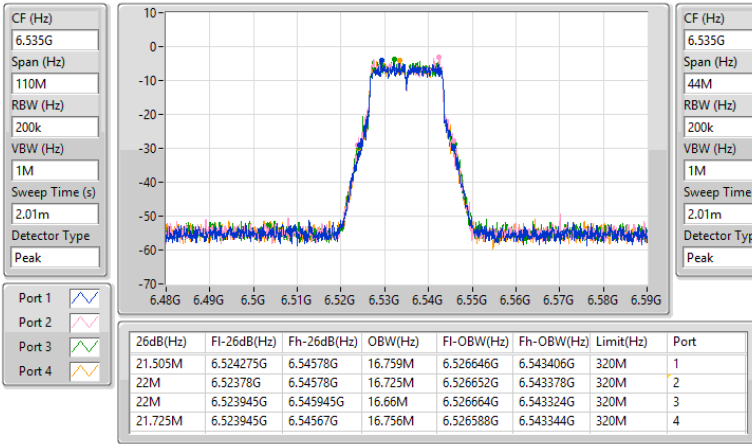
**6.525-6.875GHz\_802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**6695MHz**

05/08/2026

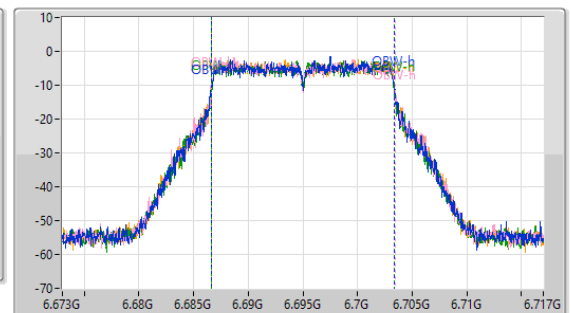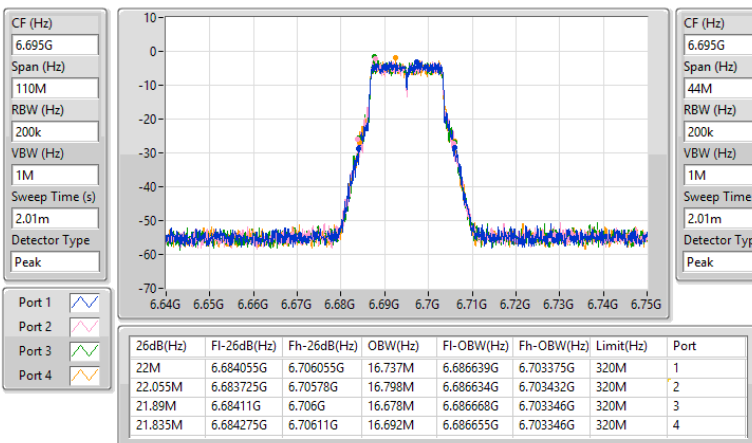


## 6.525-6.875GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6855MHz

05/08/2026

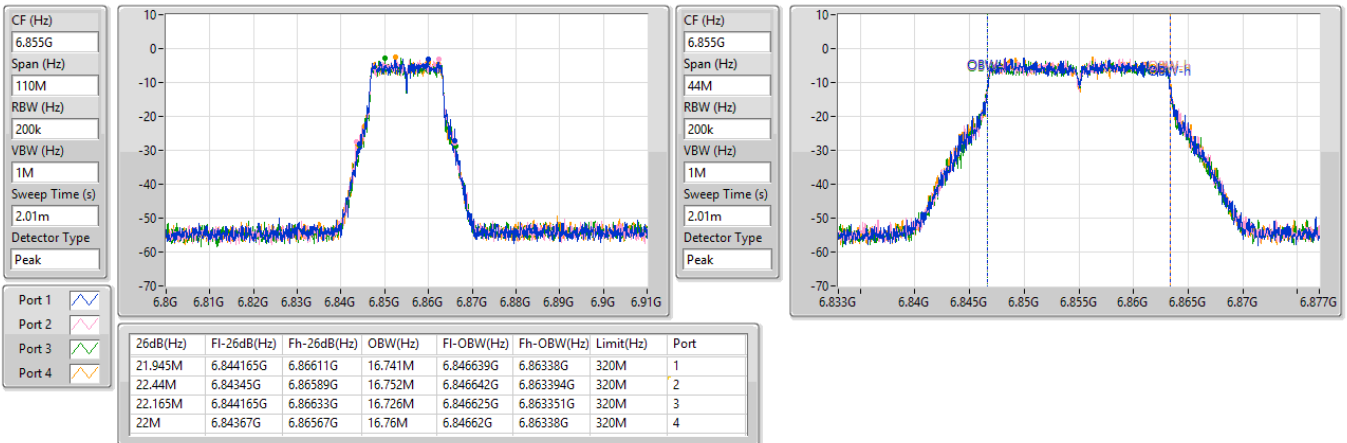


## 6.525-6.875GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6875MHz

05/08/2026


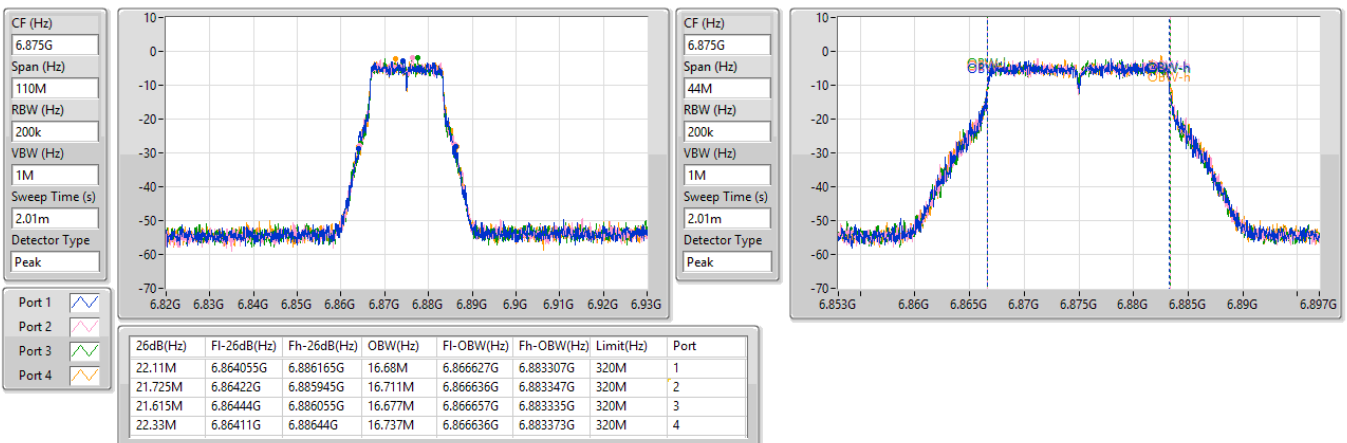


## 6.875-7.125GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

6995MHz

05/08/2026

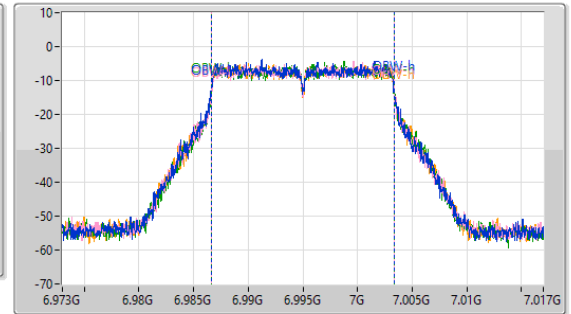
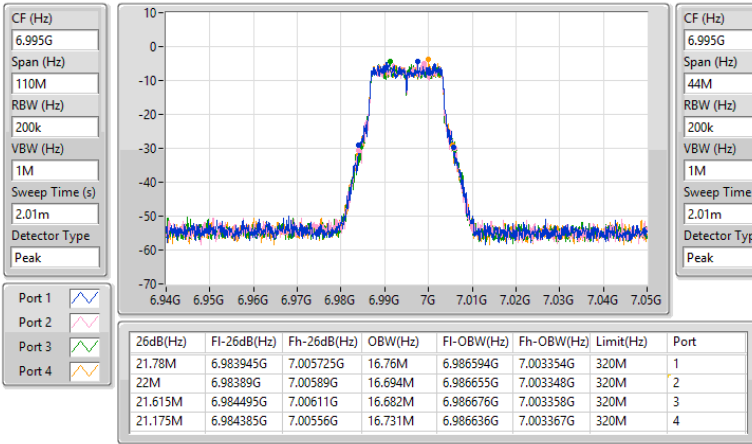


## 6.875-7.125GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW



7095MHz

05/08/2026

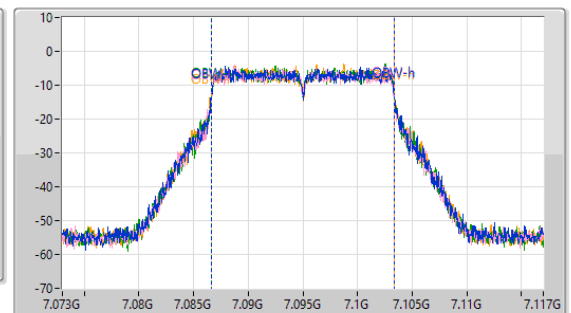
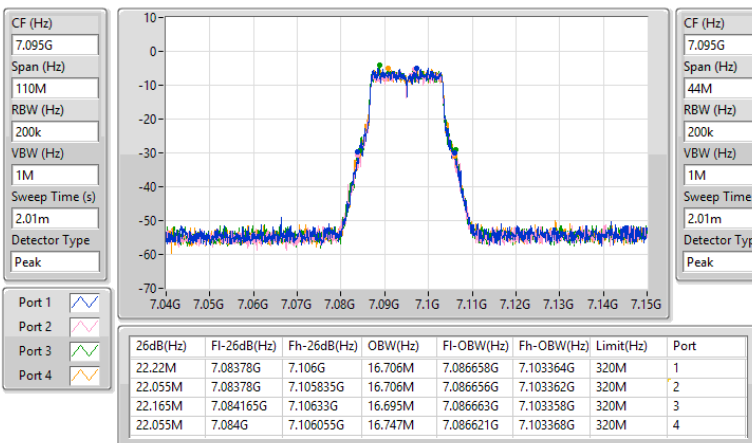


**6.875-7.125GHz\_802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**7115MHz**

05/08/2026

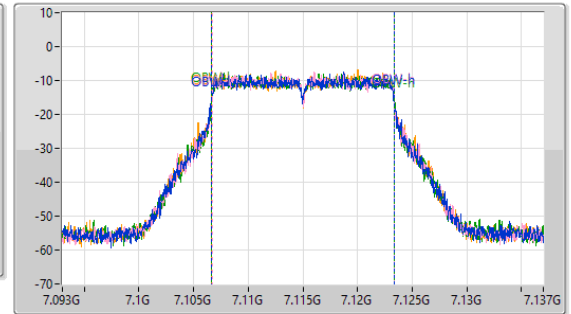
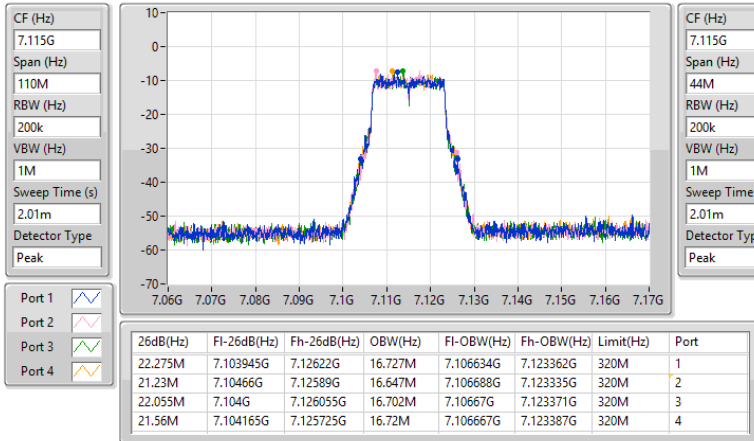

**5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**5955MHz**

05/08/2026

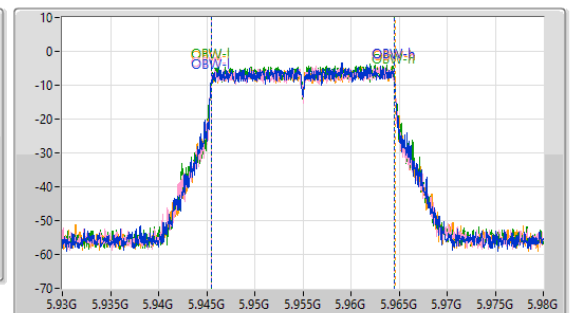
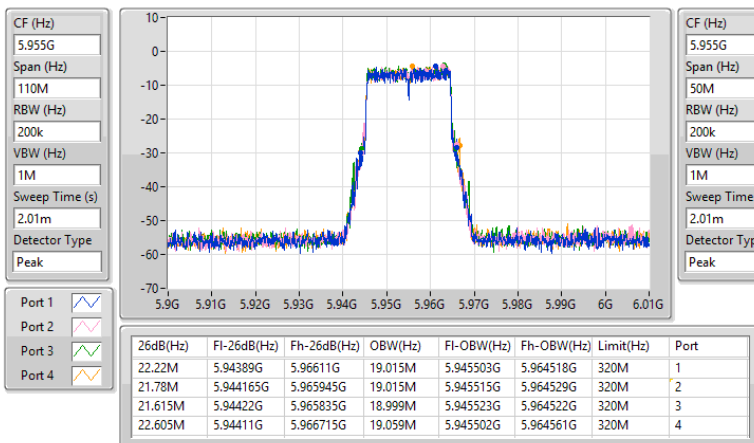


**5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6195MHz**

05/08/2026

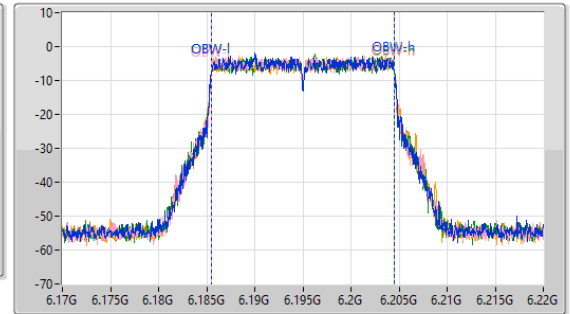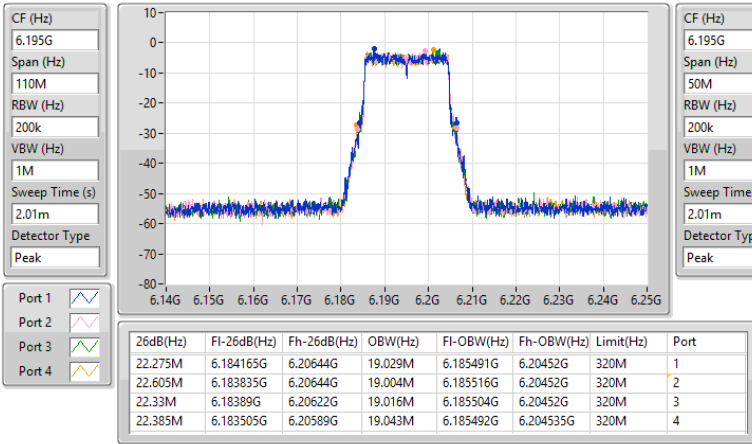

**5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6415MHz**

05/08/2026

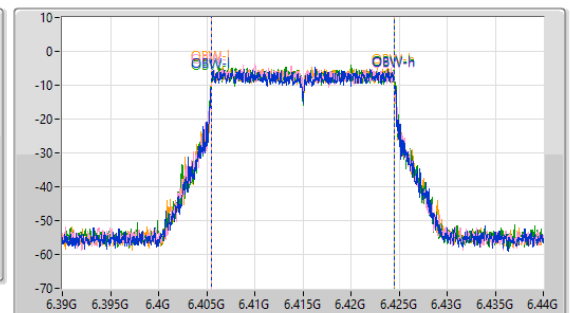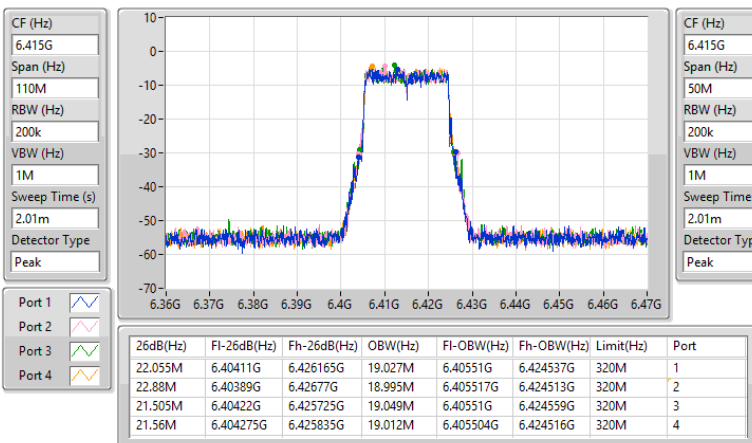


**6.425-6.525GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6435MHz**

05/08/2026

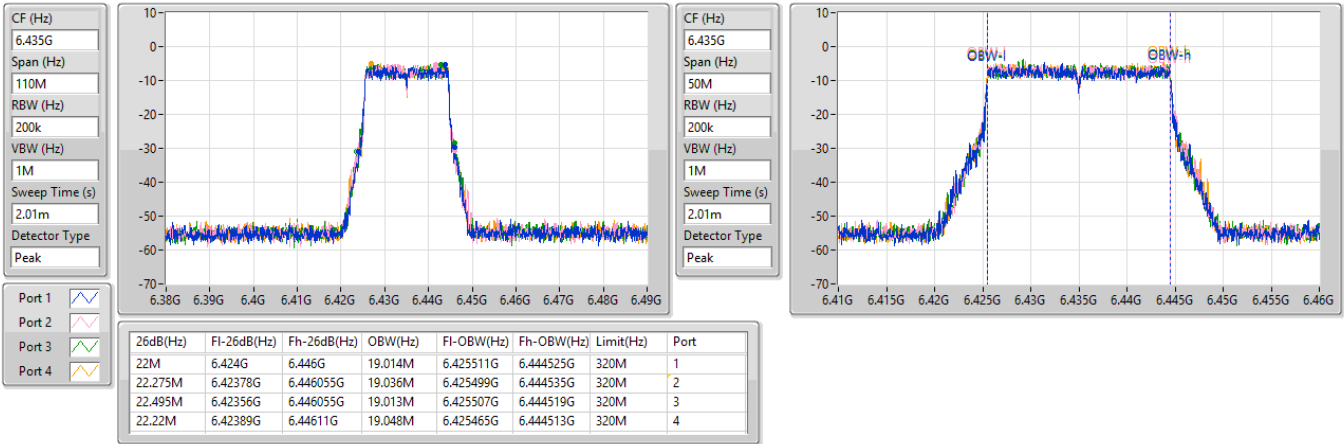
**6.425-6.525GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6475MHz**

05/08/2026

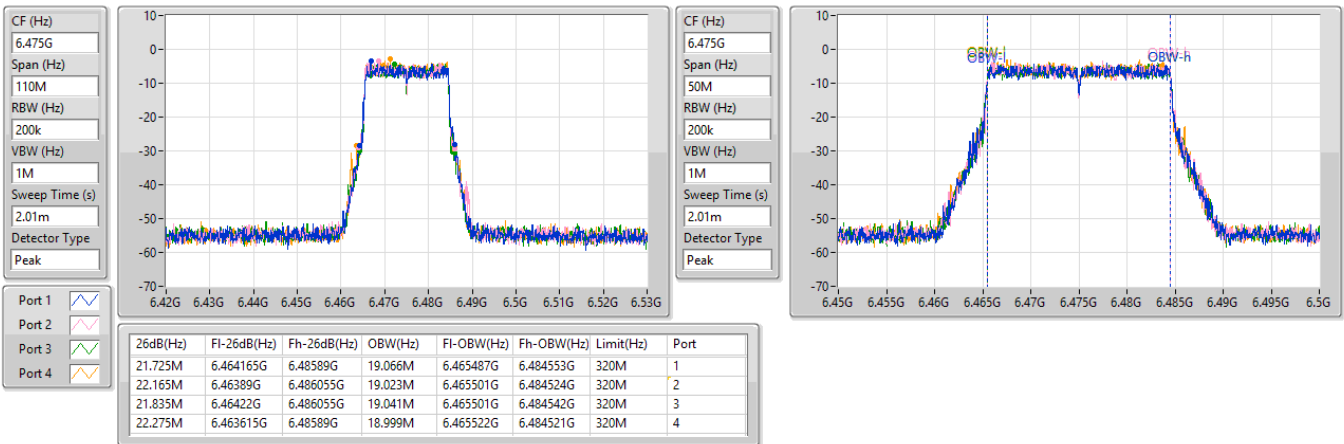


## 6.425-6.525GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

EBW

6515MHz

05/08/2026

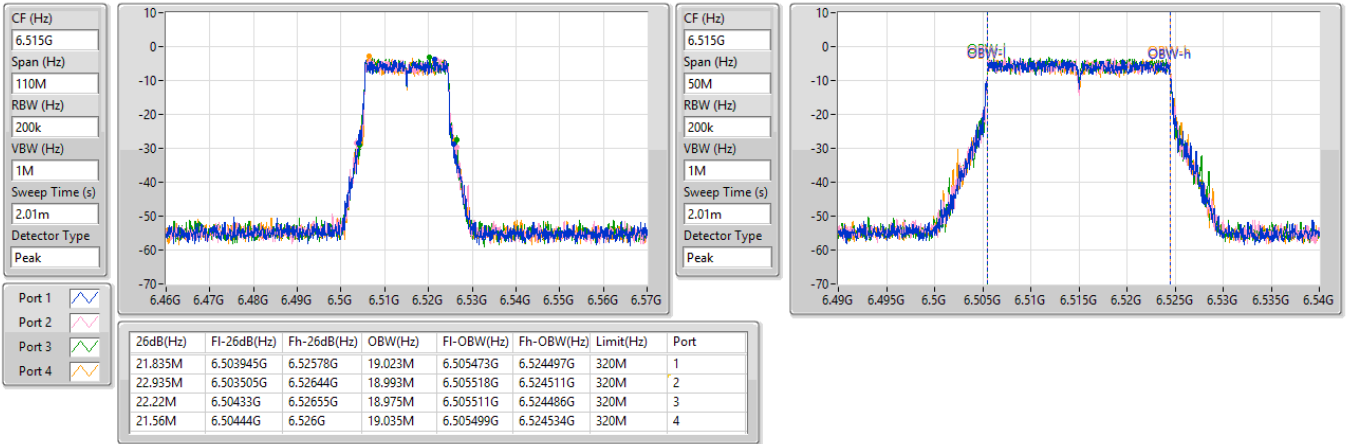


## 6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

EBW



6535MHz

05/08/2026


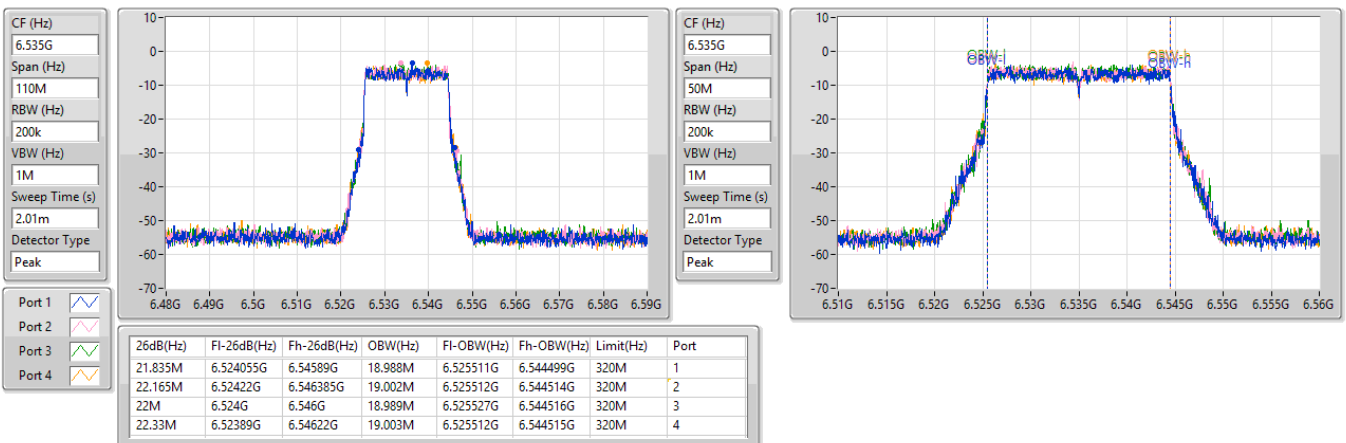


**6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6695MHz**

05/08/2026

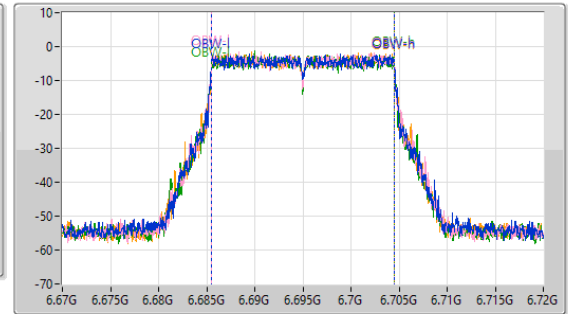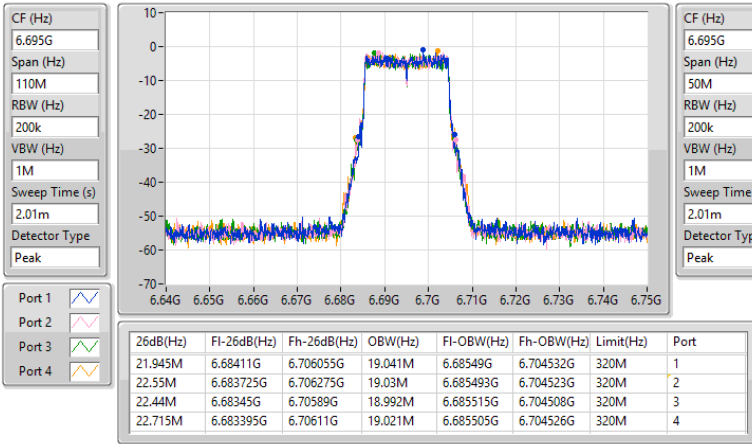

**6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6855MHz**

05/08/2026

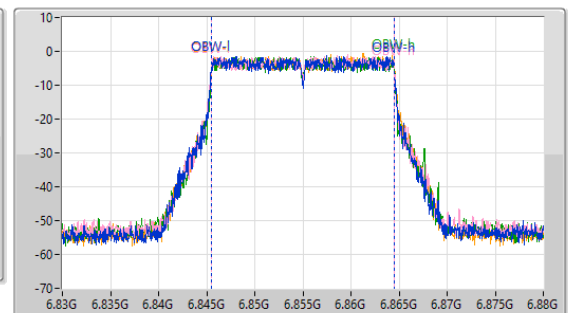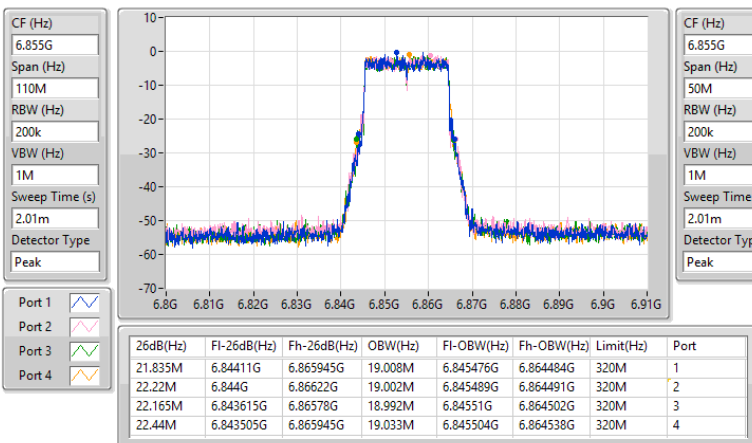


**6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6875MHz**

05/08/2026

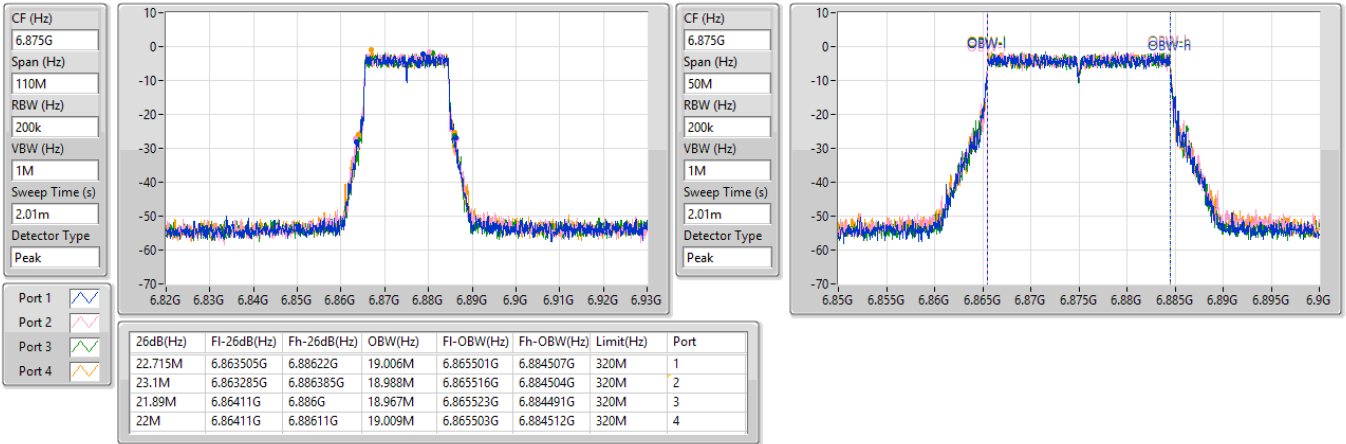

**6.875-7.125GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**6995MHz**

05/08/2026

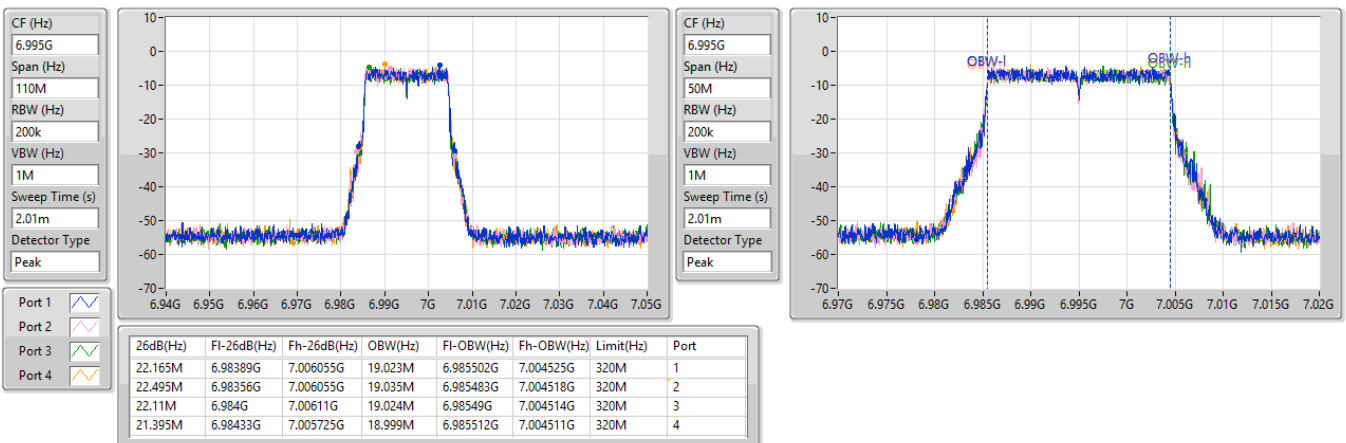


**6.875-7.125GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**7095MHz**

05/08/2026


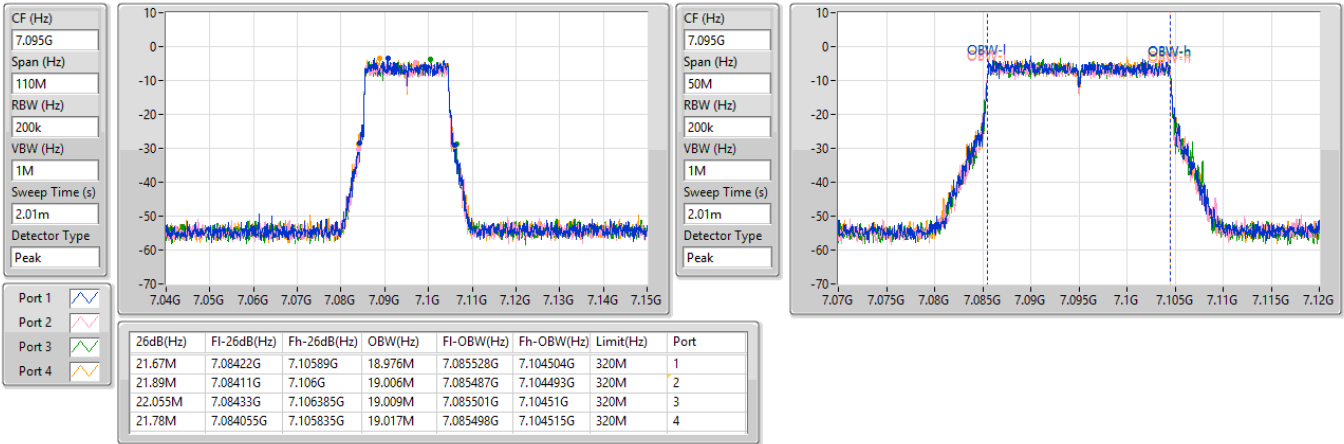

**6.875-7.125GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX**
**EBW**
**7115MHz**

05/08/2026


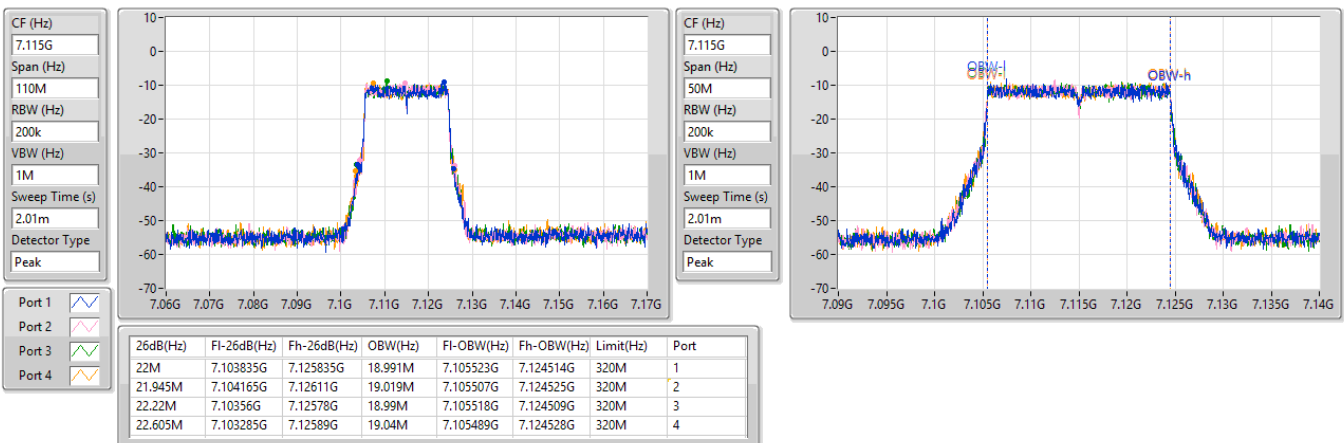


**5.925-6.425GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**5965MHz**

05/08/2026

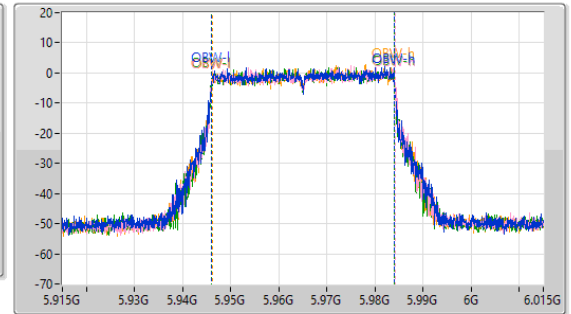
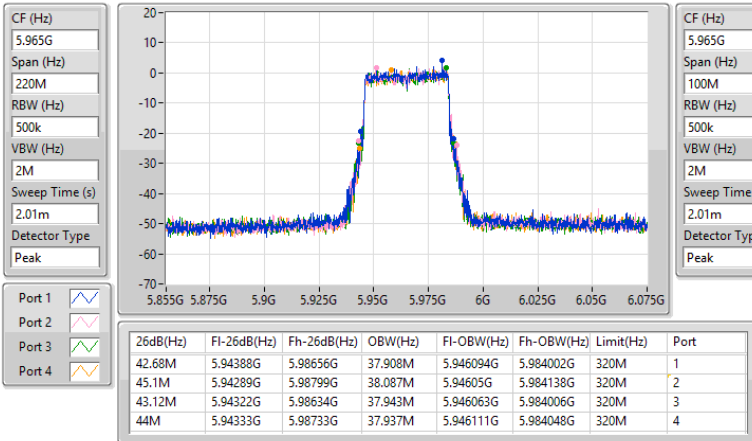

**5.925-6.425GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**6205MHz**

05/08/2026

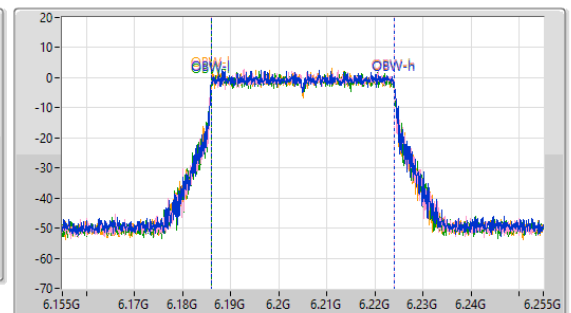
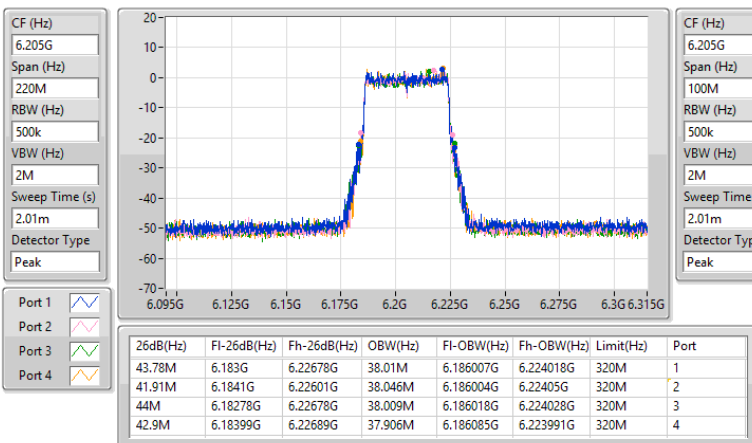


**5.925-6.425GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**6405MHz**

05/08/2026

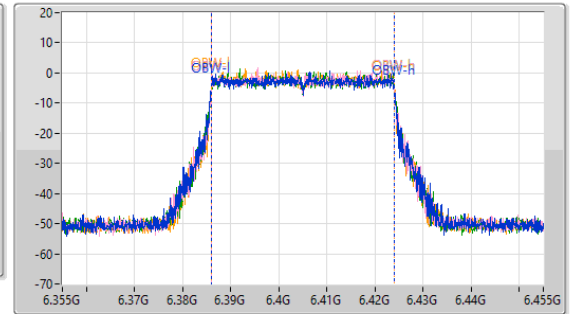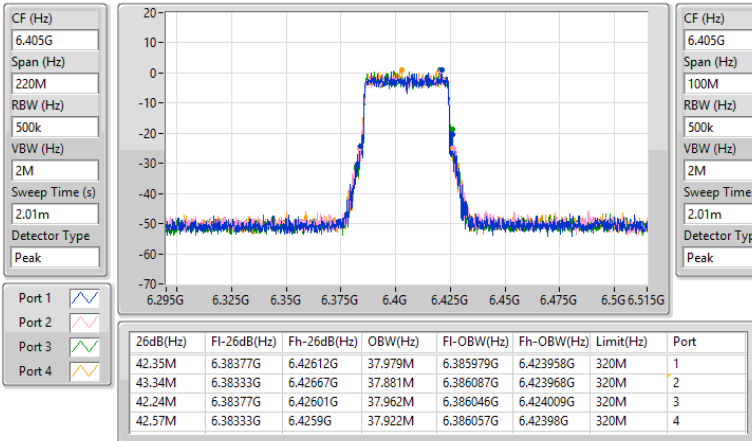
**6.425-6.525GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**6445MHz**

05/08/2026

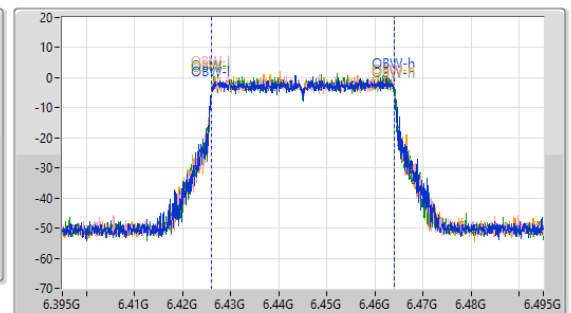
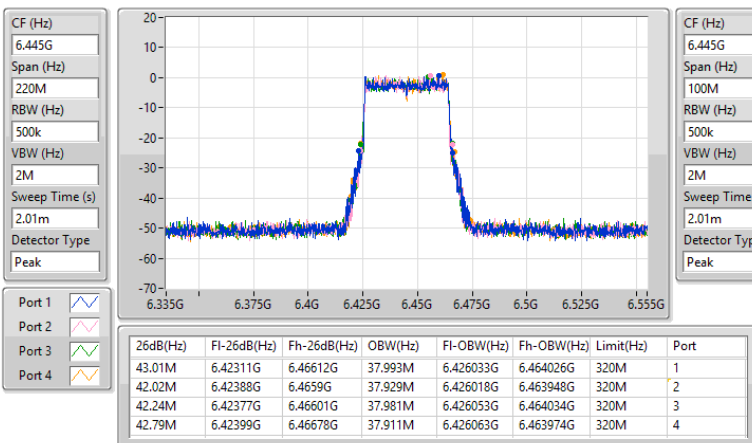


## 6.425-6.525GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

EBW

6485MHz

05/08/2026

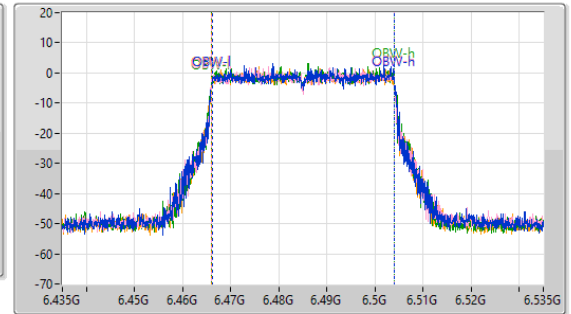
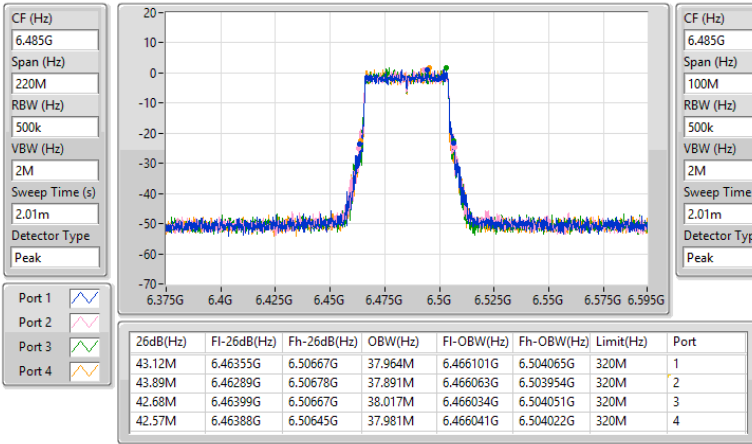


## 6.425-6.525GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

EBW


6525MHz

05/08/2026

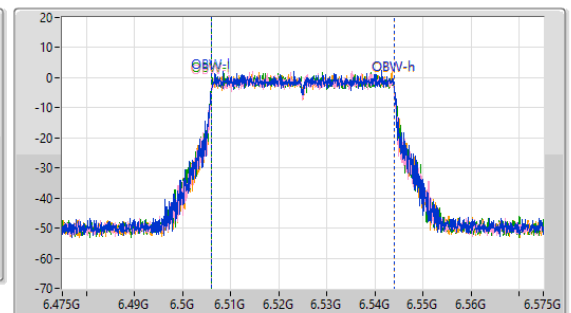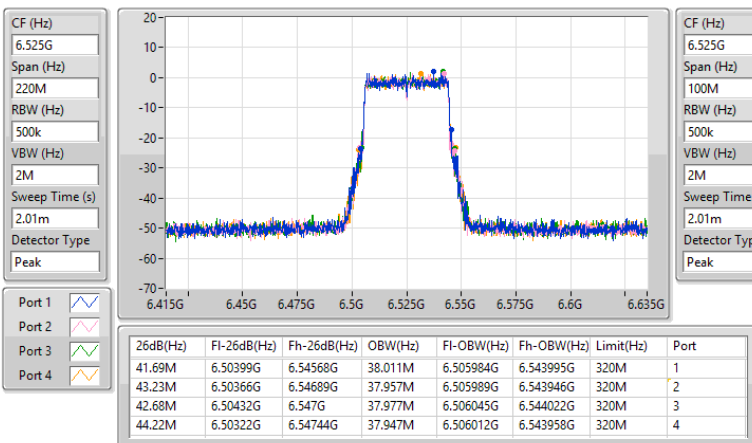


**6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**6565MHz**

05/08/2026

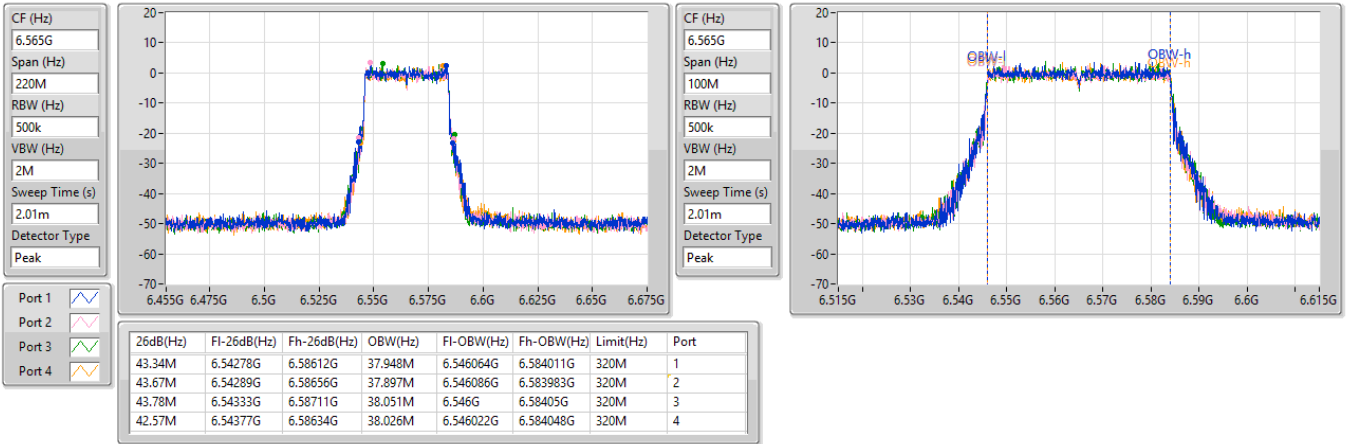
**6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**6685MHz**

05/08/2026

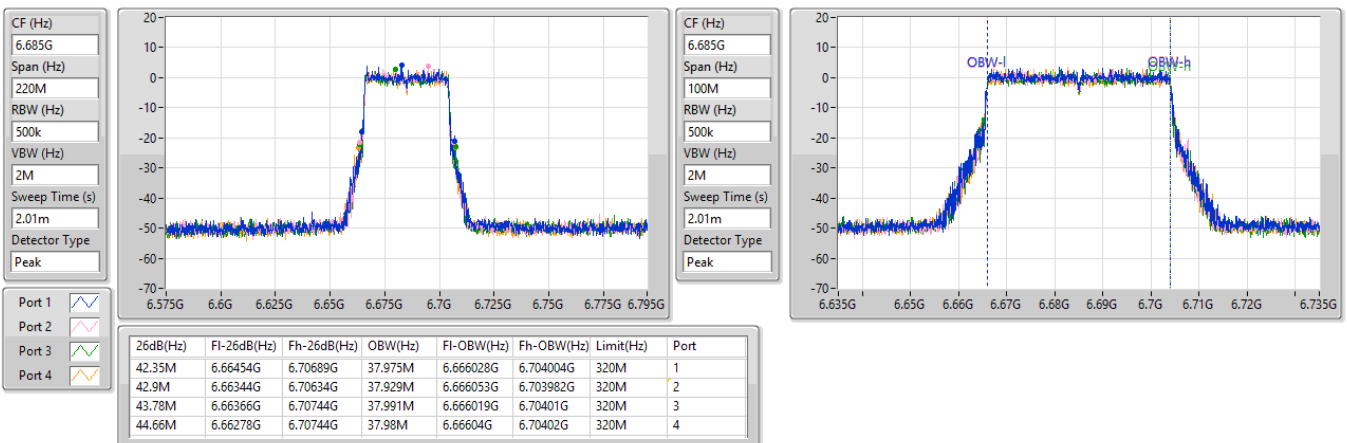


## 6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

EBW

6845MHz

05/08/2026

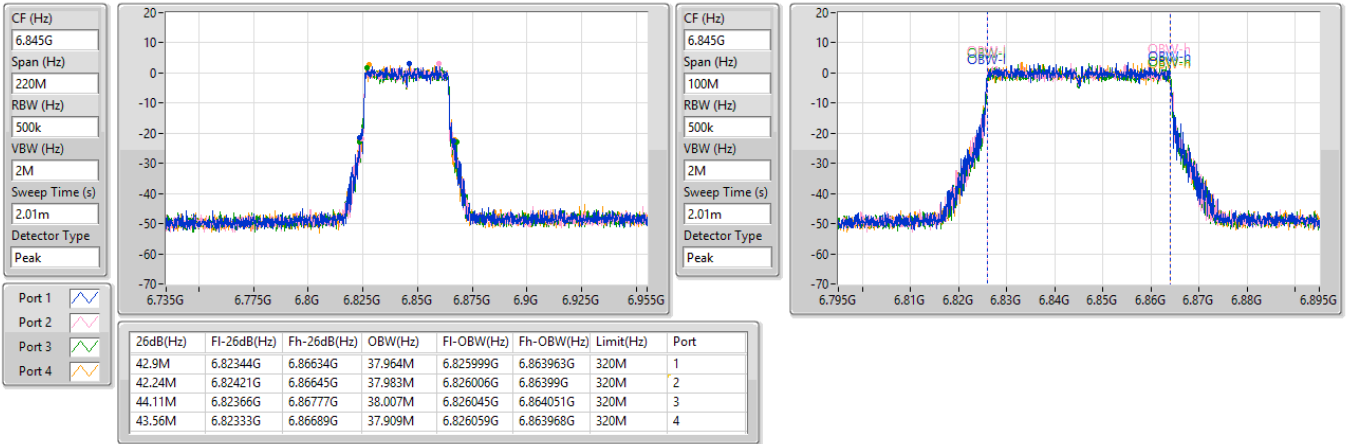


## 6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

EBW


6885MHz

05/08/2026

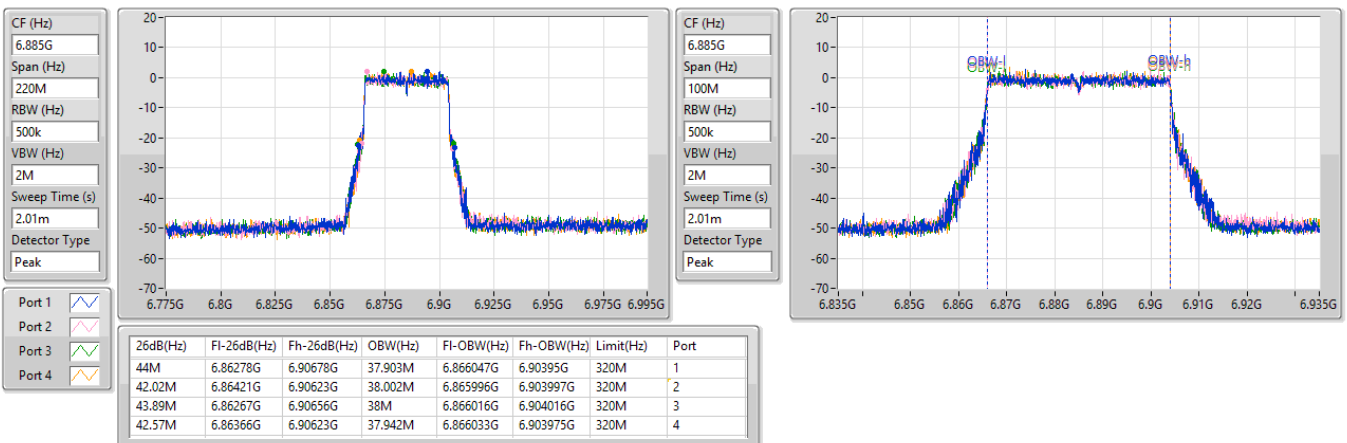


**6.875-7.125GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**7005MHz**

05/08/2026

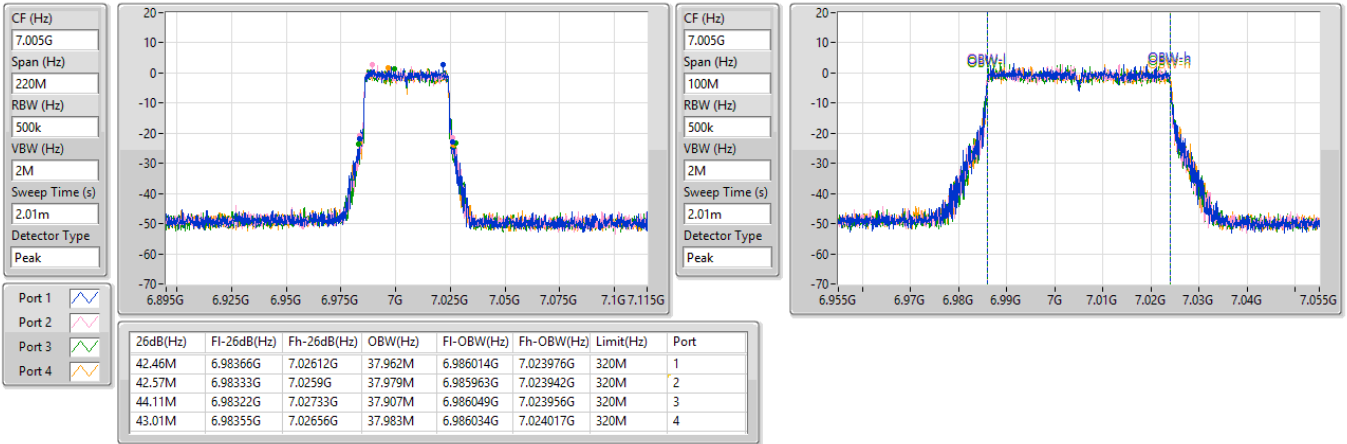

**6.875-7.125GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX**
**EBW**
**7085MHz**

05/08/2026

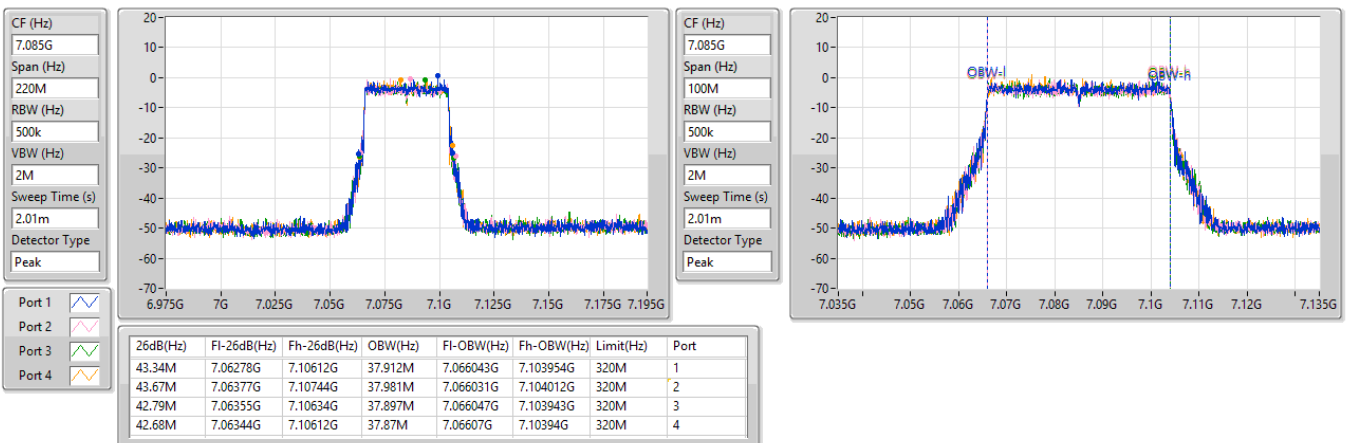


**5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**5985MHz**

05/08/2026


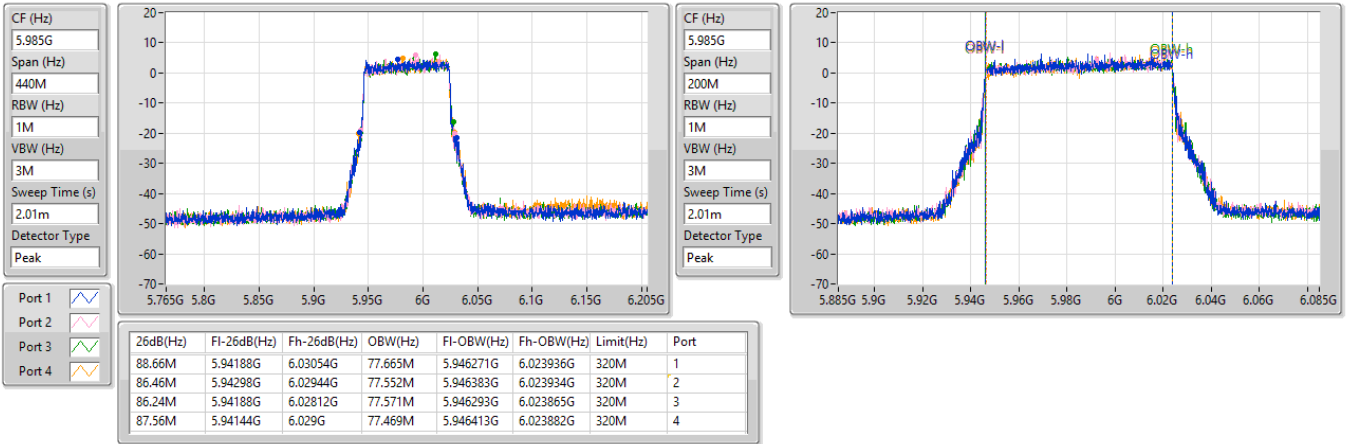

**5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**6225MHz**

05/08/2026


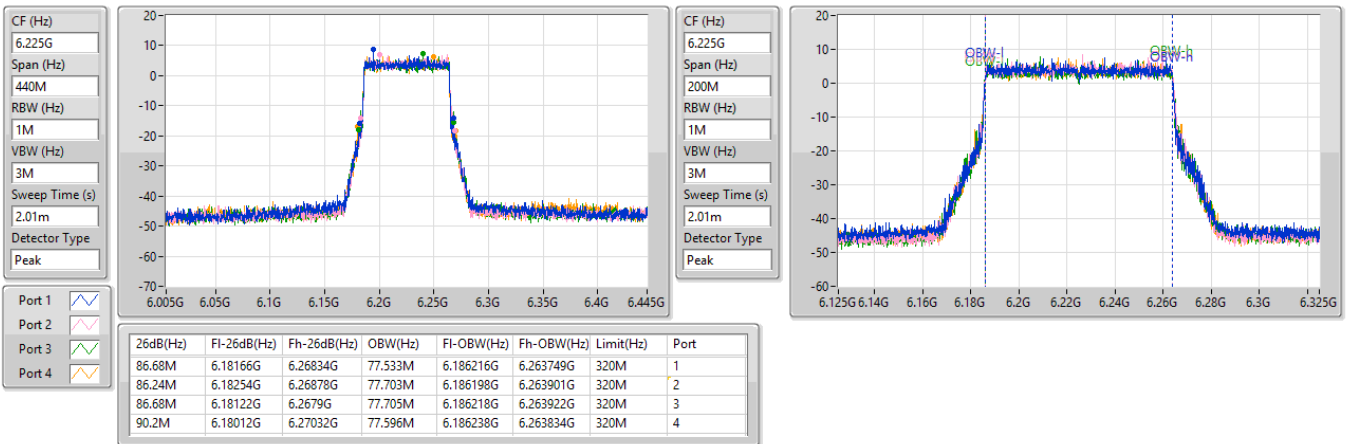


**5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**6385MHz**

05/08/2026

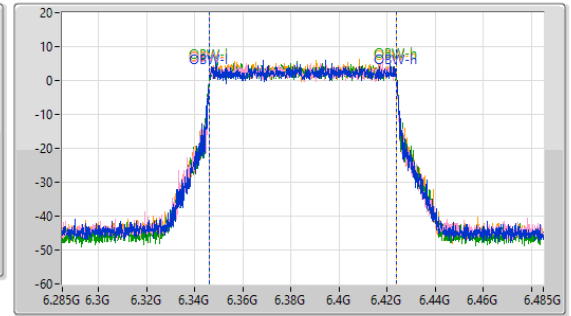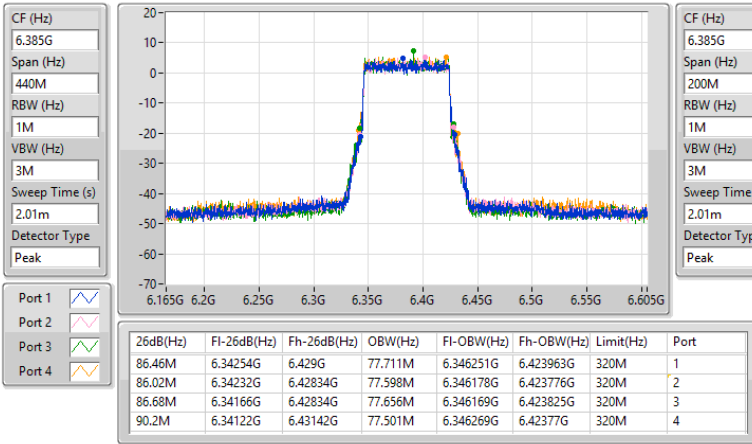
**6.425-6.525GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**6465MHz**

05/08/2026

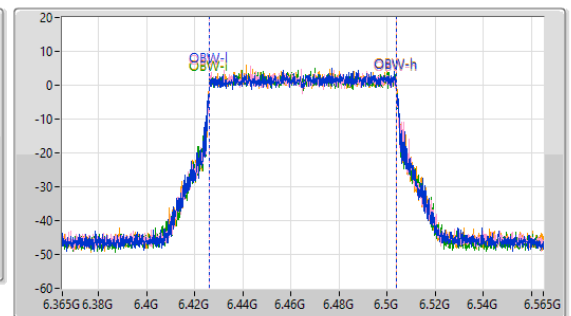
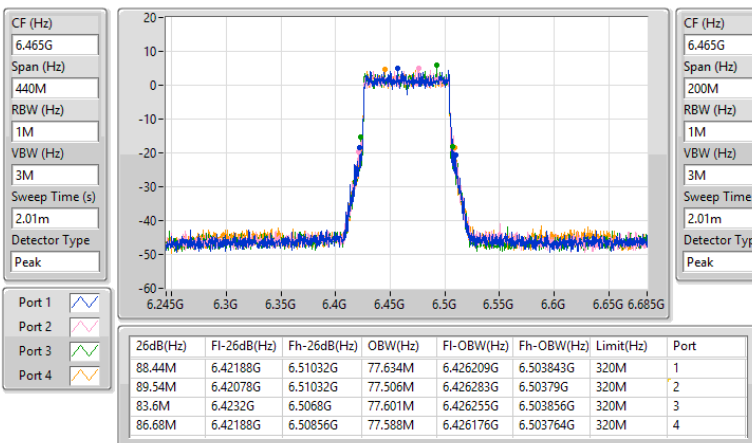


## 6.425-6.525GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

6545MHz

05/08/2026

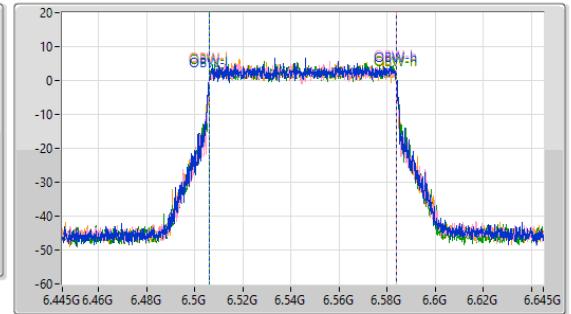
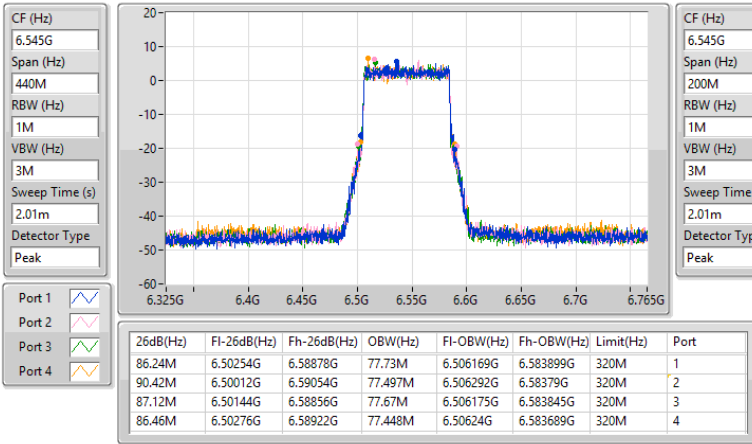


## 6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW


6625MHz

05/08/2026

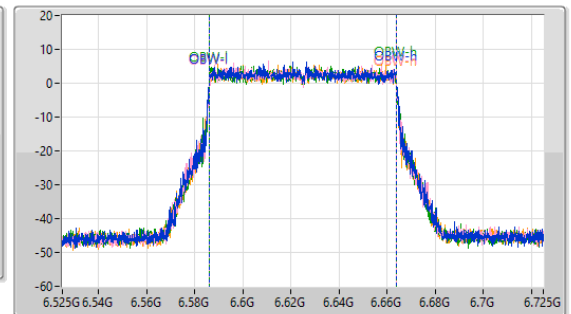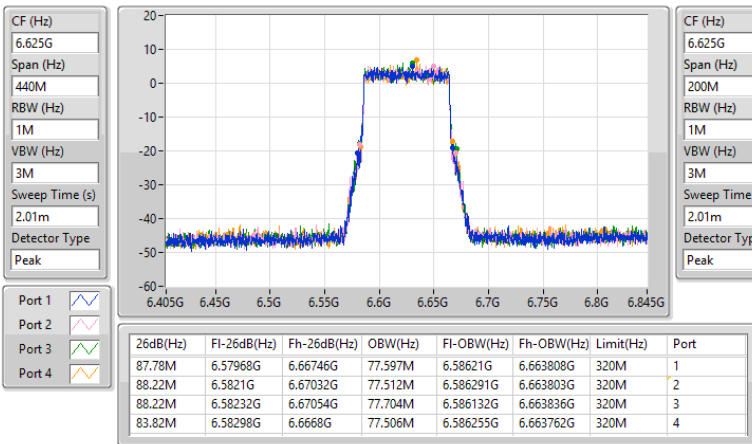


**6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**6705MHz**

05/08/2026

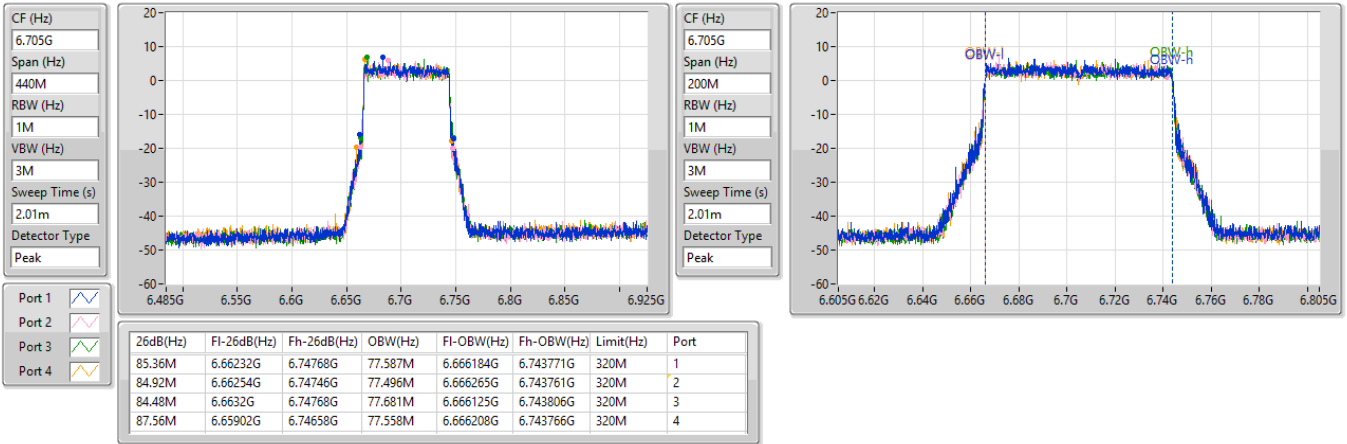
**6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX**
**EBW**
**6785MHz**

05/08/2026


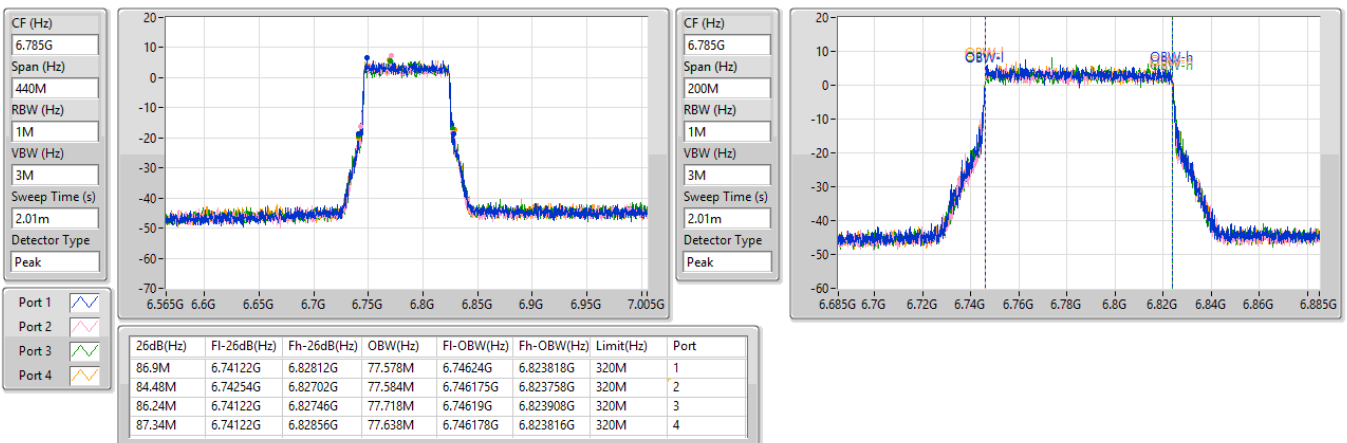


## 6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

6865MHz

05/08/2026

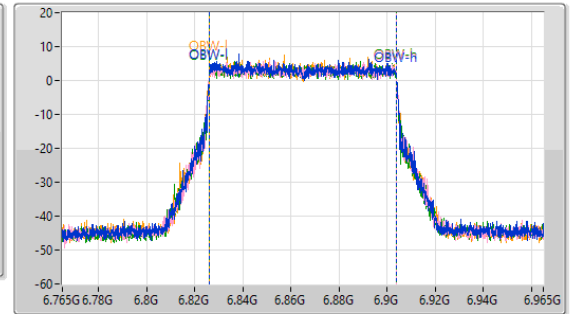
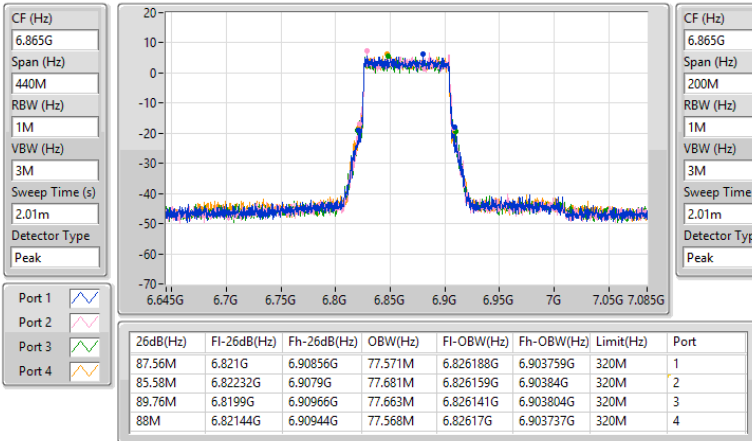


## 6.875-7.125GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

6945MHz

05/08/2026

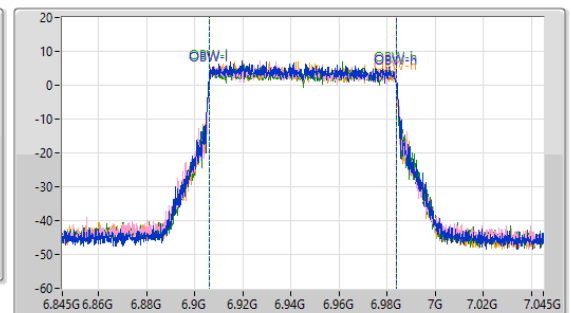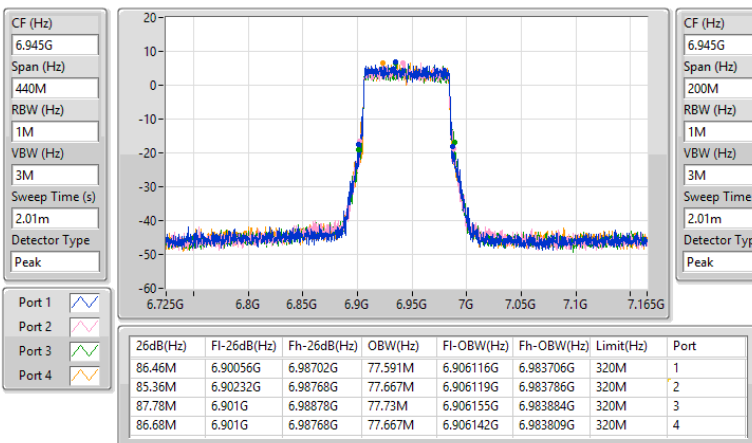


## 6.875-7.125GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

7025MHz

05/08/2026

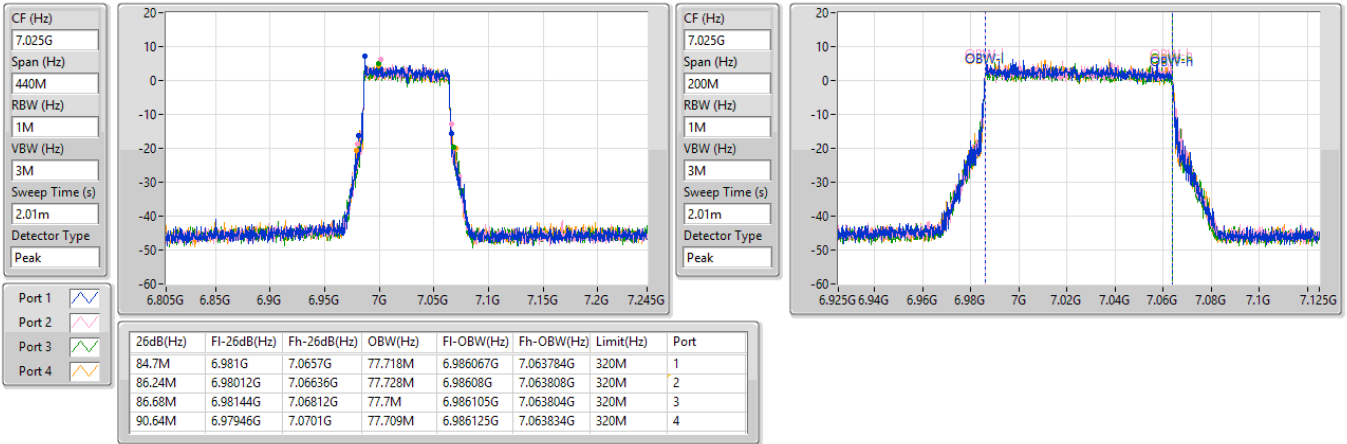


## 5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6025MHz

05/08/2026


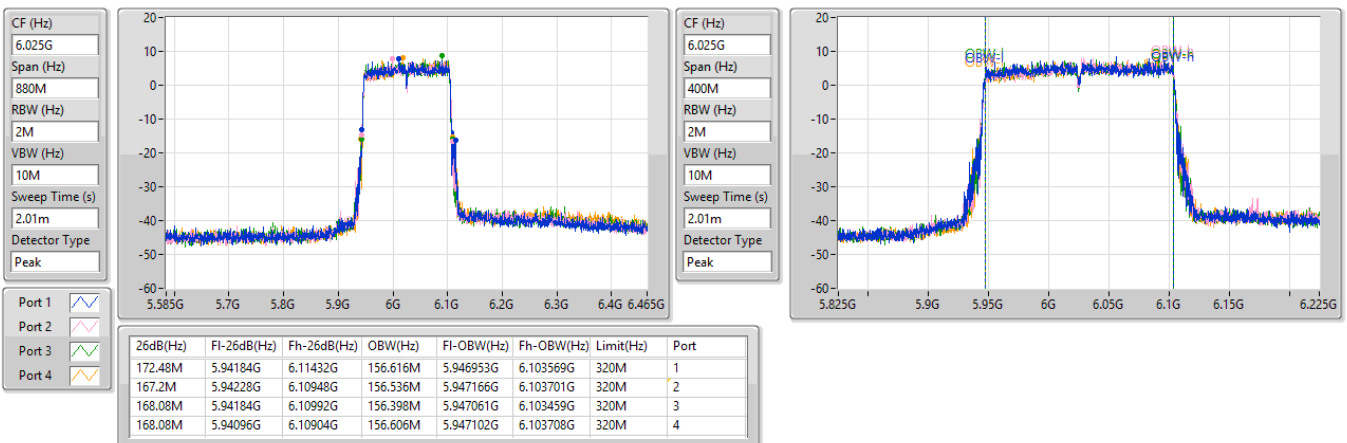


5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6185MHz

05/08/2026

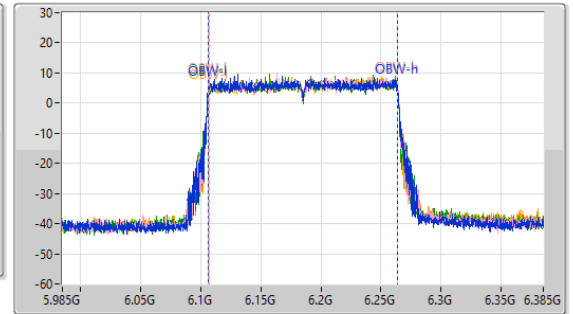
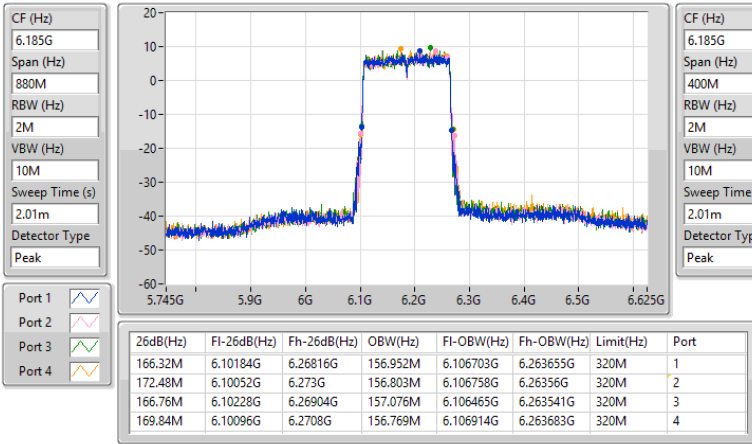


5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6345MHz

05/08/2026

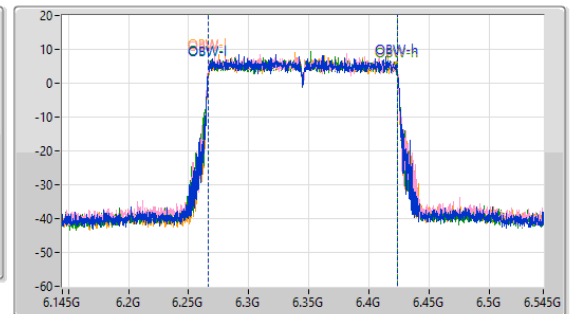
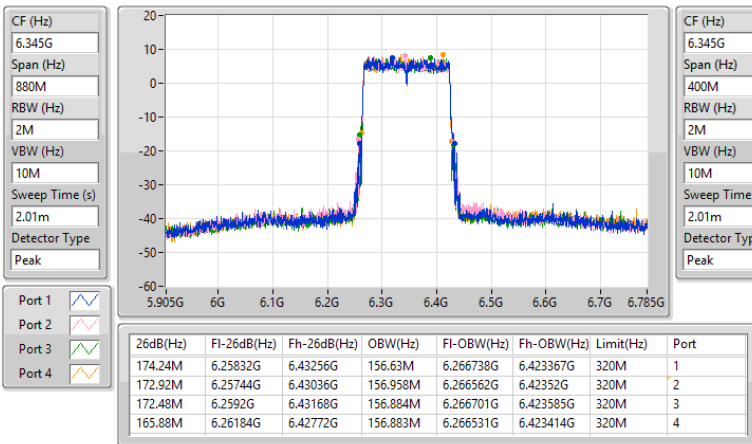


## 6.425-6.525GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6505MHz

05/08/2026

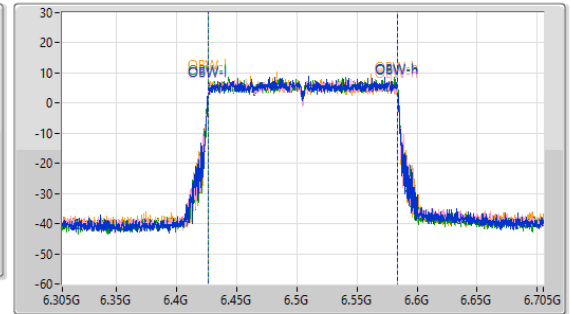
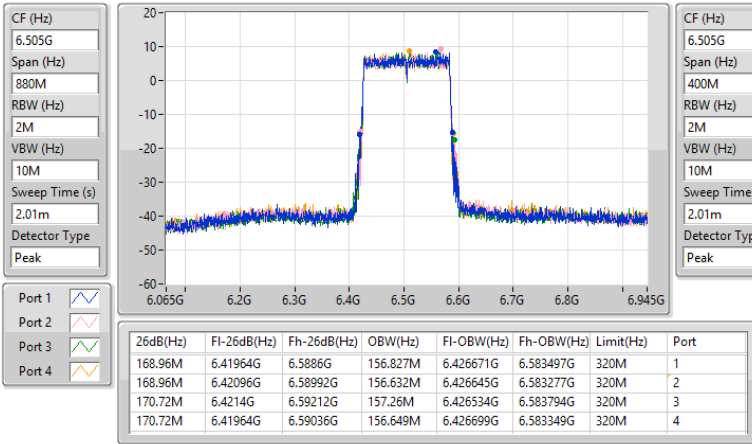


## 6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6665MHz

05/08/2026

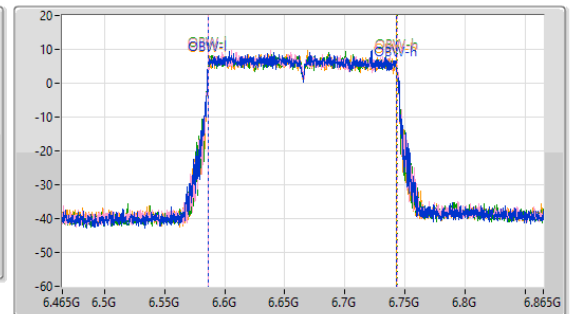
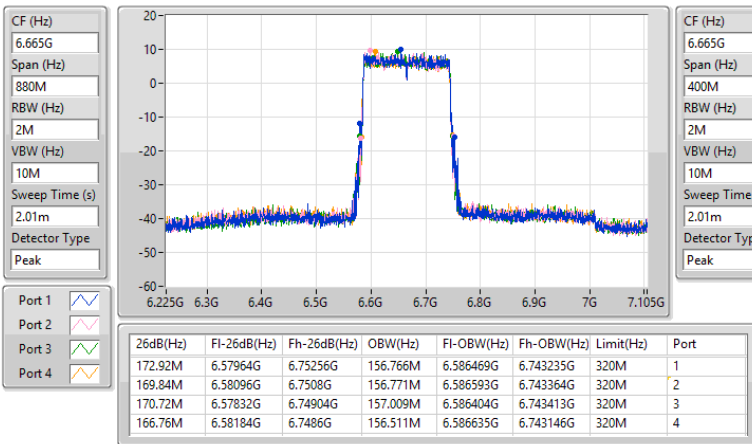


## 6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6825MHz

05/08/2026

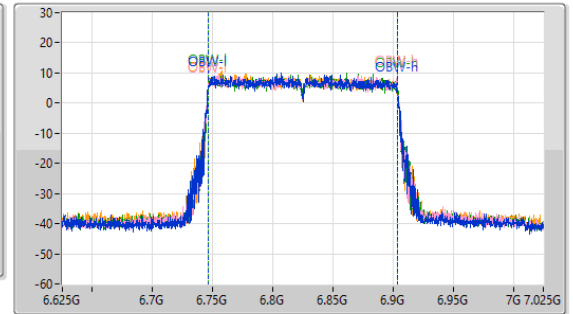
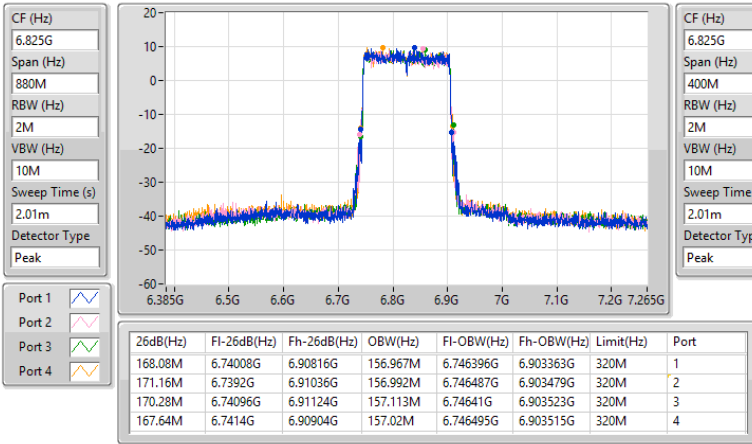


## 6.875-7.125GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

EBW

6985MHz

05/08/2026

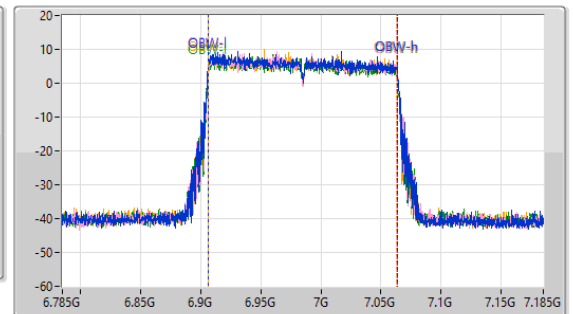
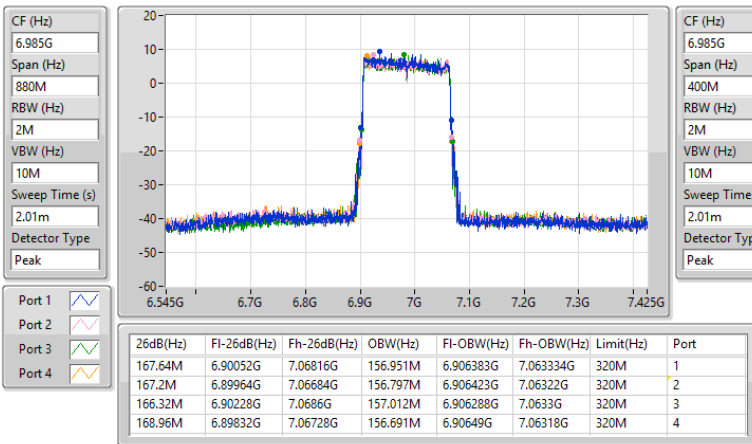


5.925-6.425GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

EBW

6105MHz

05/08/2026

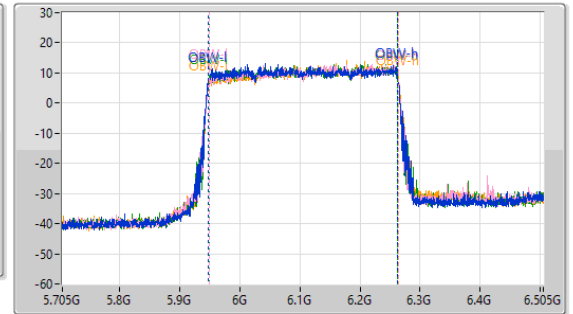
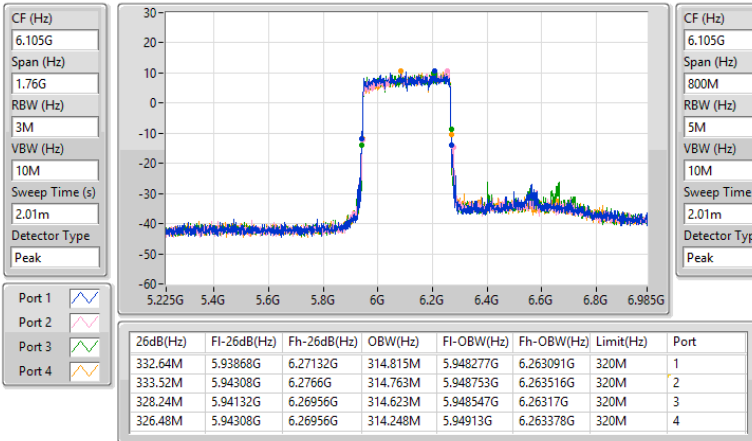


5.925-6.425GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

EBW



6265MHz

05/08/2026

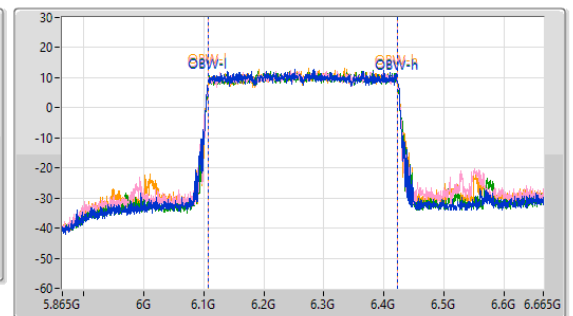
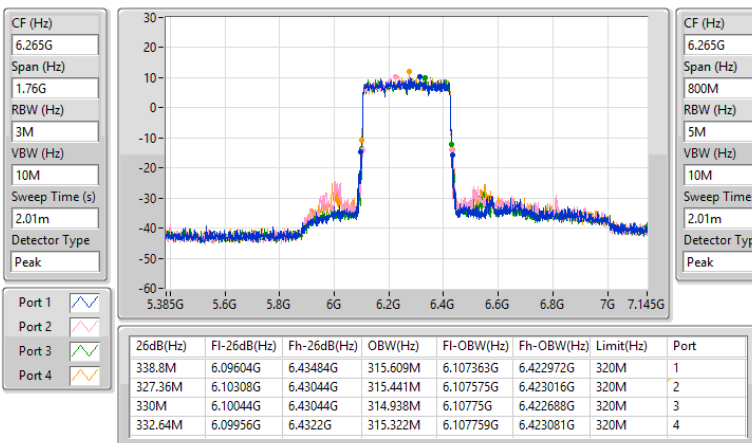


**5.925-6.425GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX**
**EBW**
**6425MHz**

05/08/2026

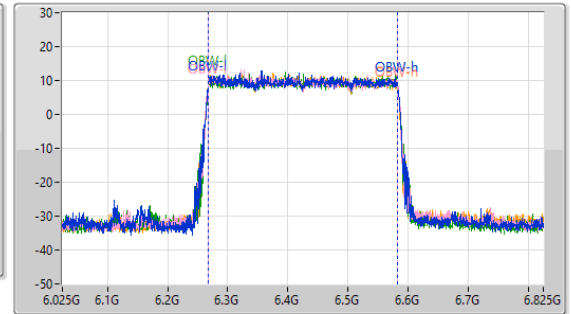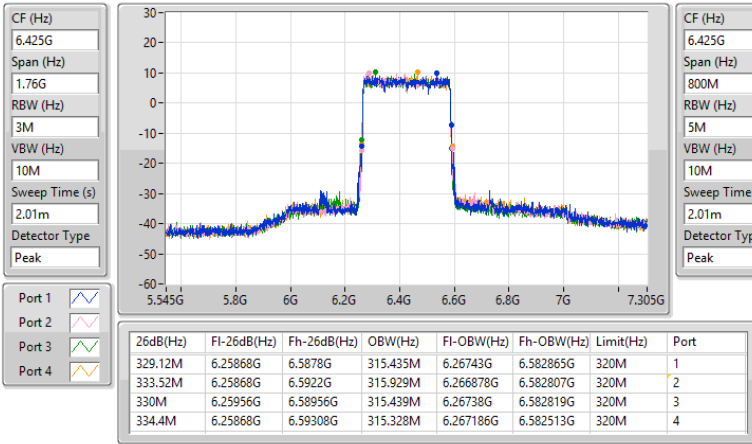
**6.425-6.525GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX**
**EBW**
**6585MHz**

05/08/2026

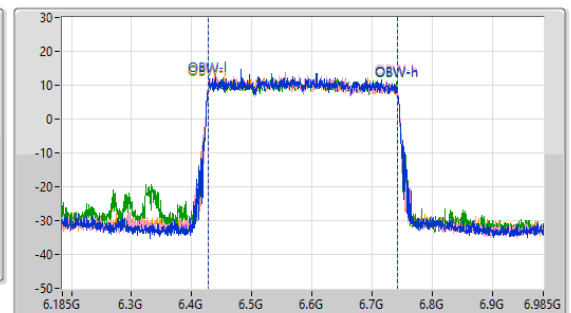
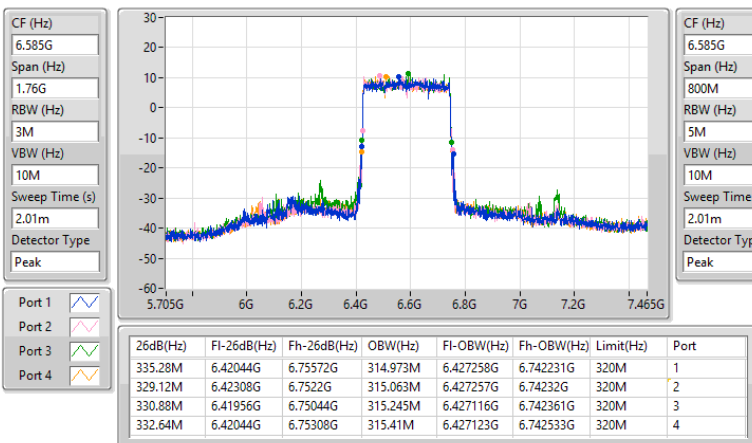


## 6.525-6.875GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

EBW

6745MHz

05/08/2026

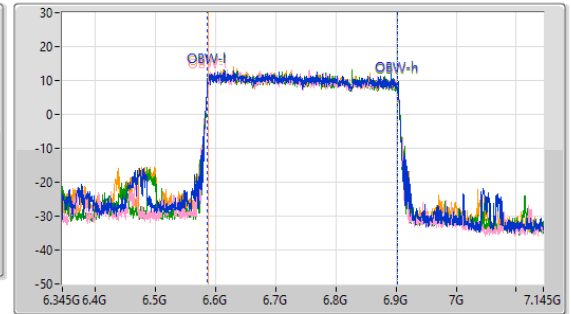
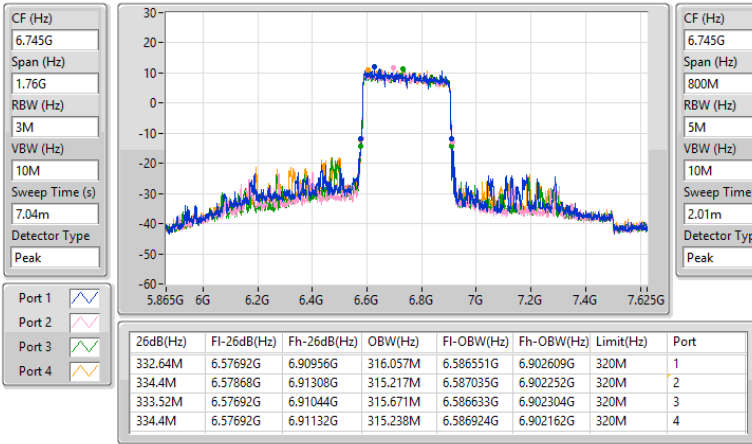


## 6.525-6.875GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

EBW


6905MHz

05/08/2026

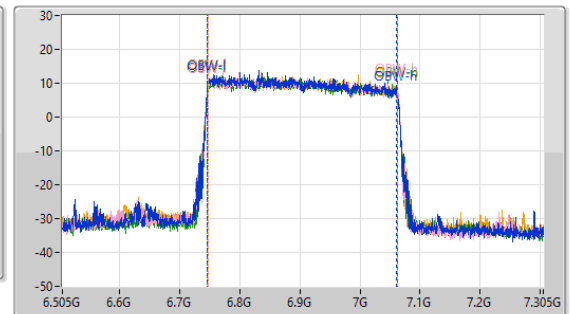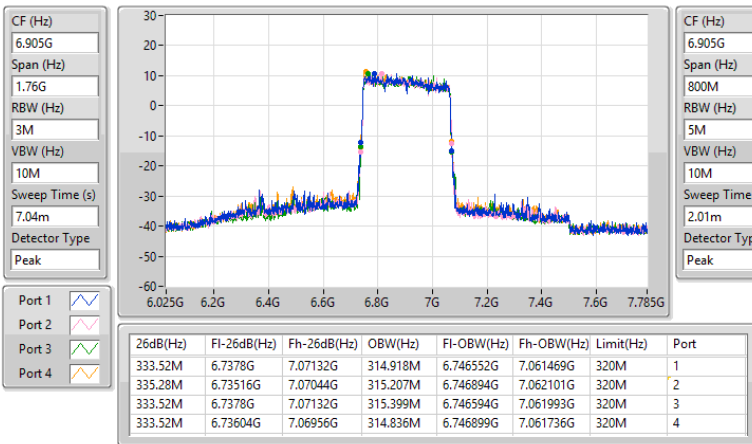


**5.925-6.425GHz\_802.11be EHT20\_Nss4\_(MCS0)\_4TX**
**EBW**
**5955MHz**

05/08/2026

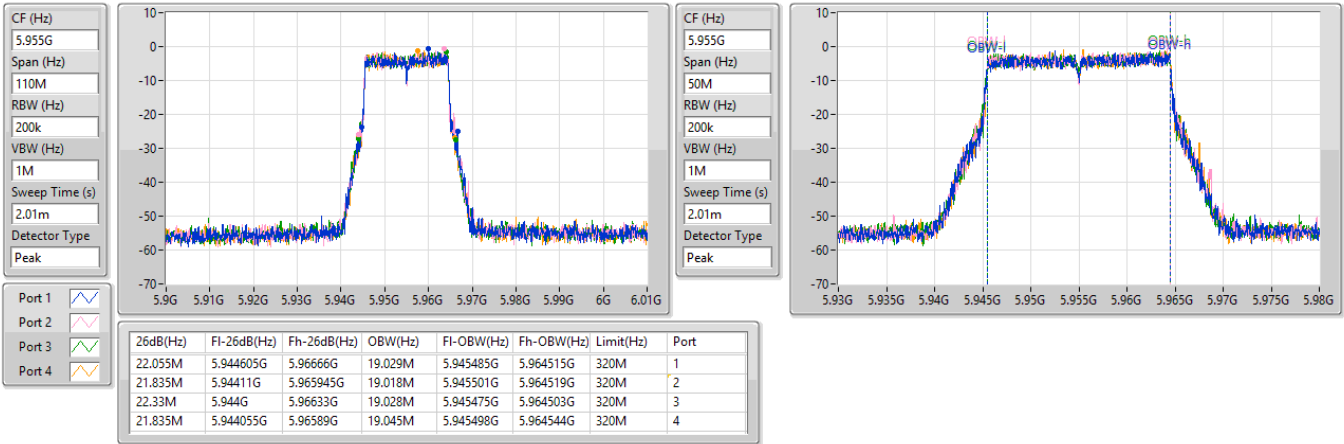

**5.925-6.425GHz\_802.11be EHT20\_Nss4\_(MCS0)\_4TX**
**EBW**
**6195MHz**

05/08/2026

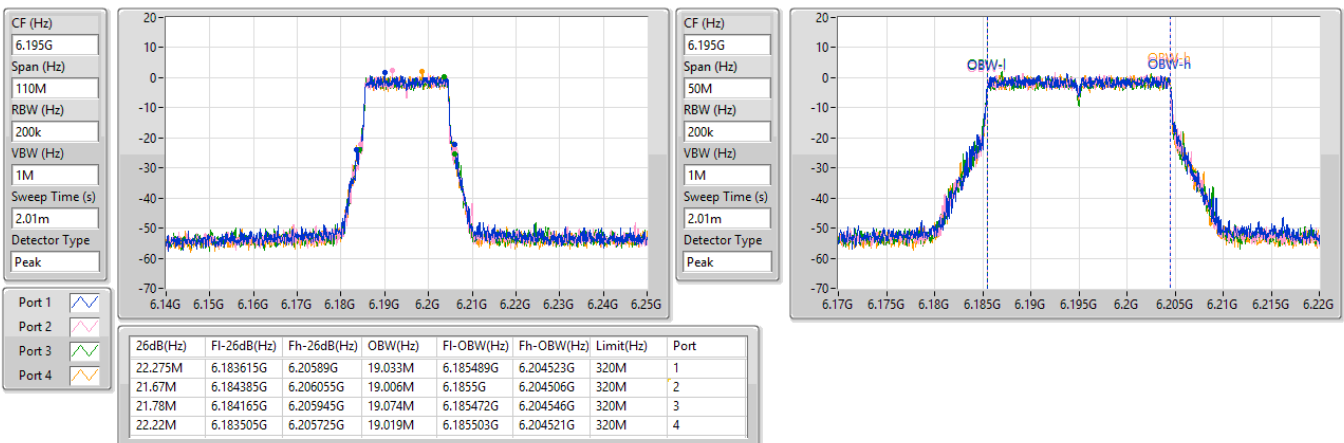


**5.925-6.425GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX**
**EBW**
**6415MHz**

05/08/2026


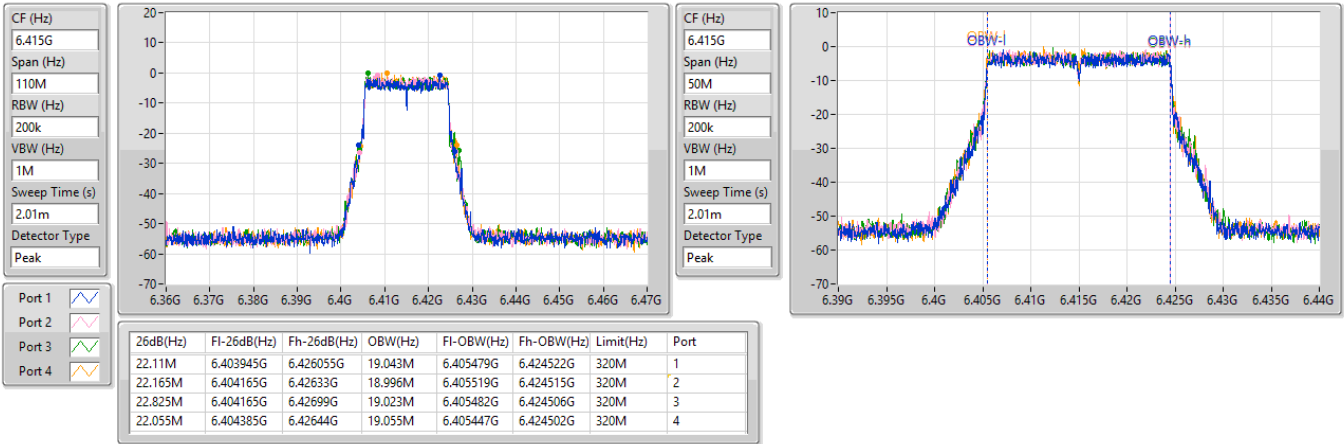

**6.425-6.525GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX**
**EBW**
**6435MHz**

05/08/2026


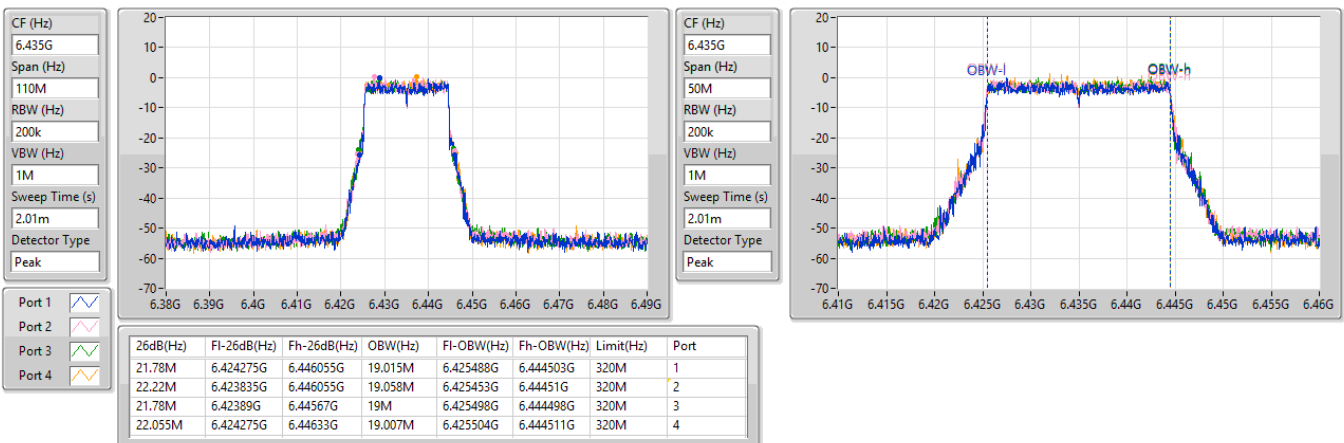


**6.425-6.525GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX**
**EBW**
**6475MHz**

05/08/2026

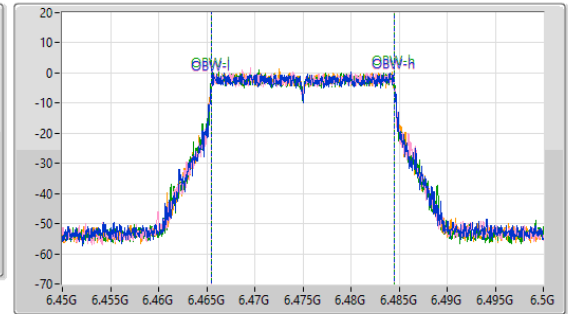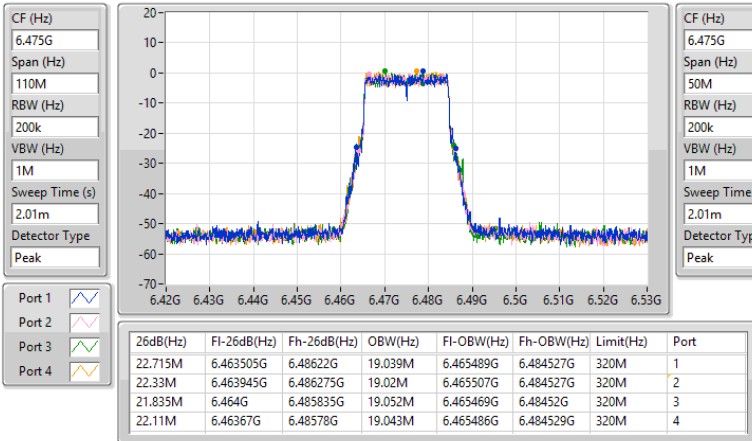
**6.425-6.525GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX**
**EBW**
**6515MHz**

05/08/2026

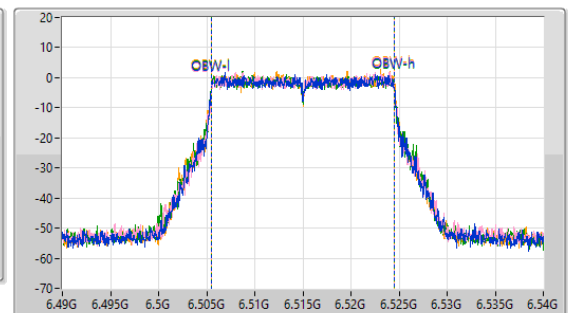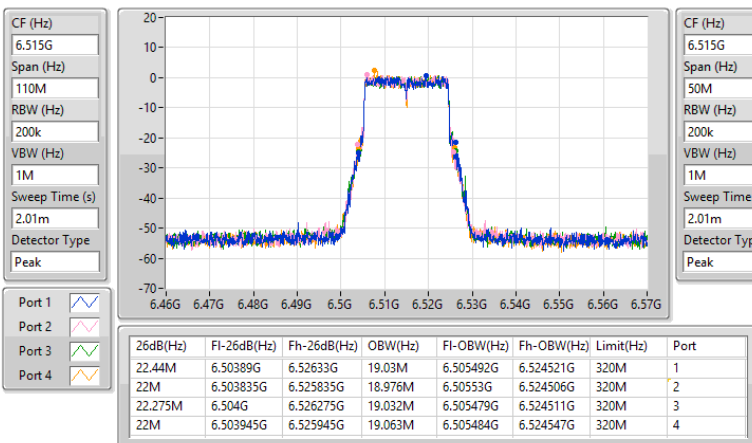


## 6.525-6.875GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX

EBW

6535MHz

05/08/2026

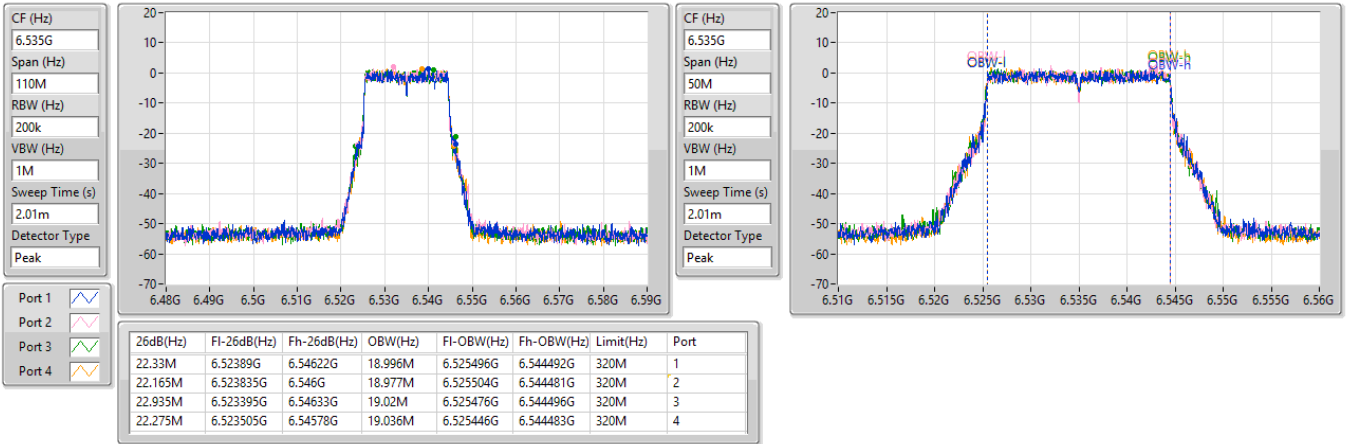


## 6.525-6.875GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX

EBW

6695MHz

05/08/2026

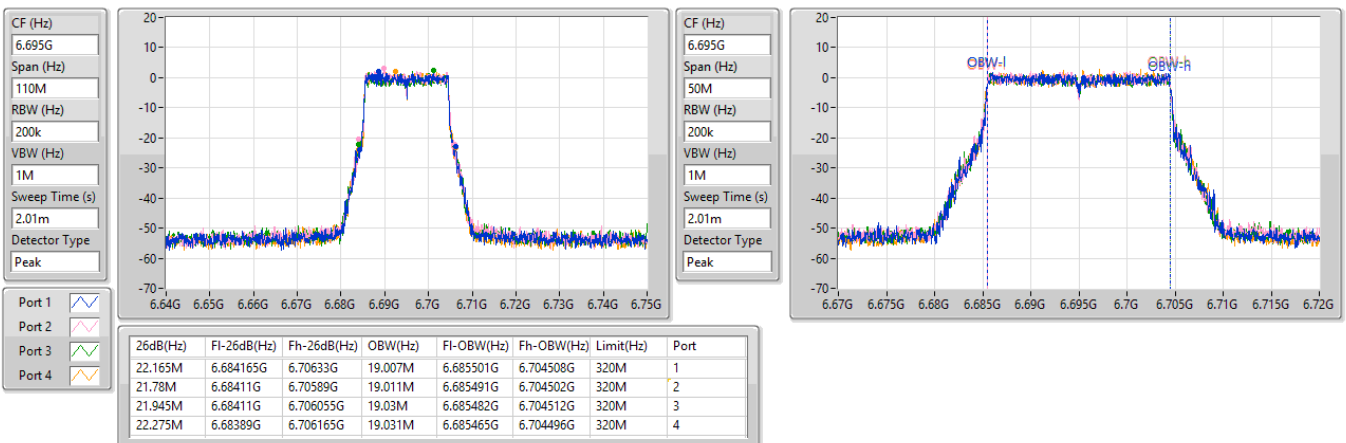


6.525-6.875GHz\_802.11be EHT20\_Nss4\_(MCS0)\_4TX

EBW

6855MHz

05/08/2026

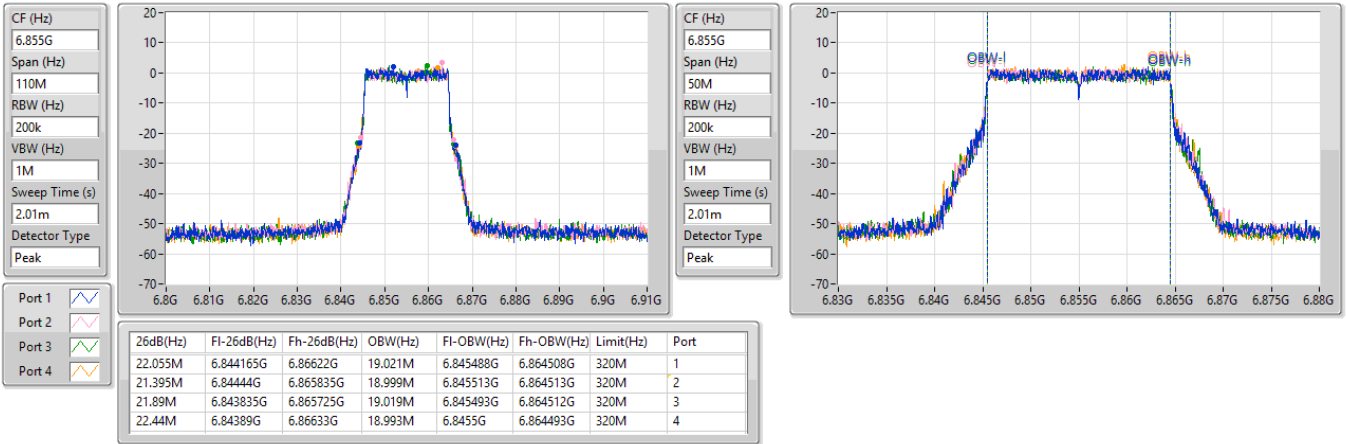


6.525-6.875GHz\_802.11be EHT20\_Nss4\_(MCS0)\_4TX

EBW

6875MHz

05/08/2026


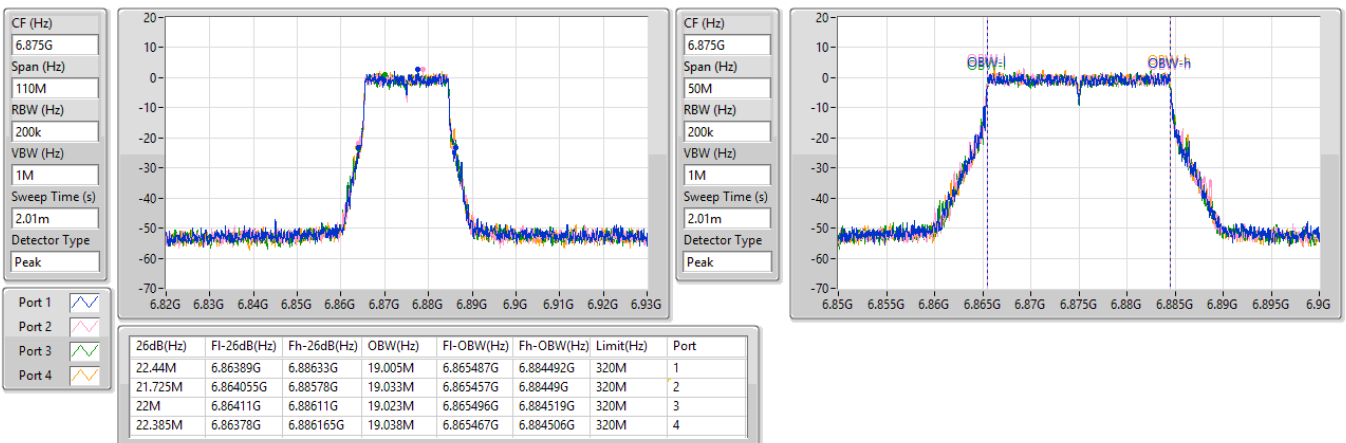


## 6.875-7.125GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX

EBW

6995MHz

05/08/2026

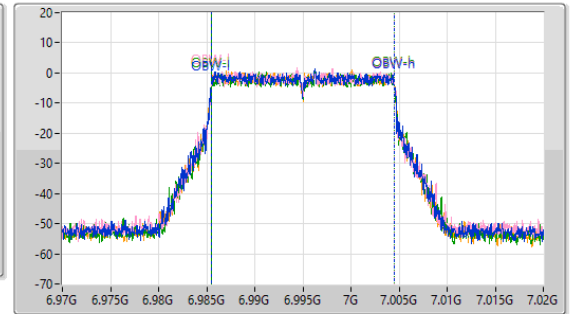
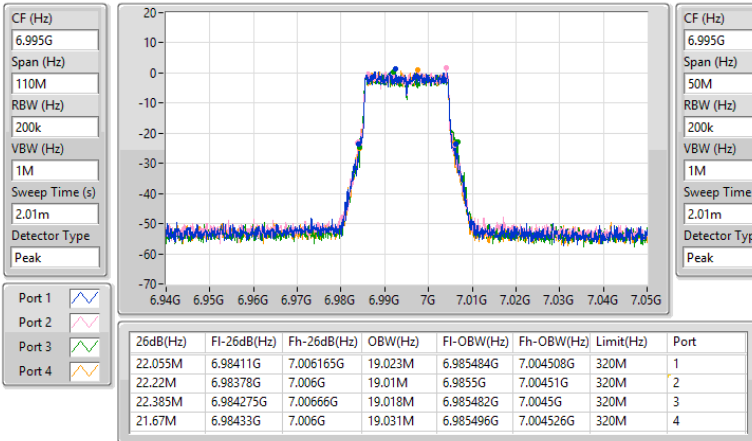


## 6.875-7.125GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX

EBW

7095MHz

05/08/2026

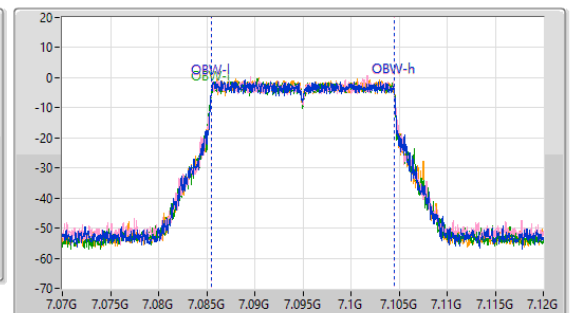
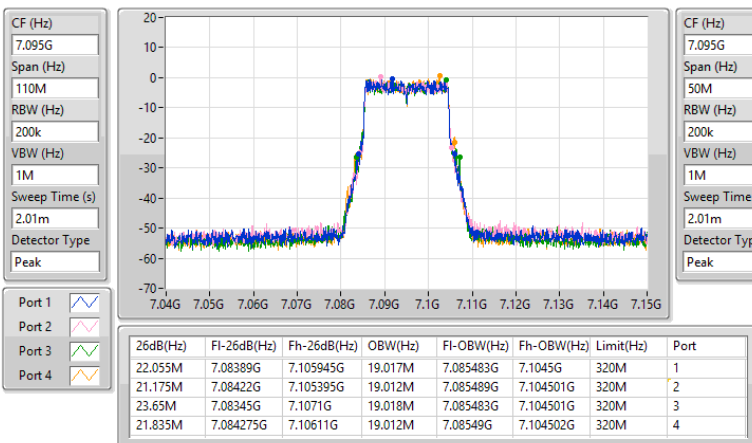


## 6.875-7.125GHz\_802.11be EHT20\_Nss4,(MCS0)\_4TX

EBW

7115MHz

05/08/2026

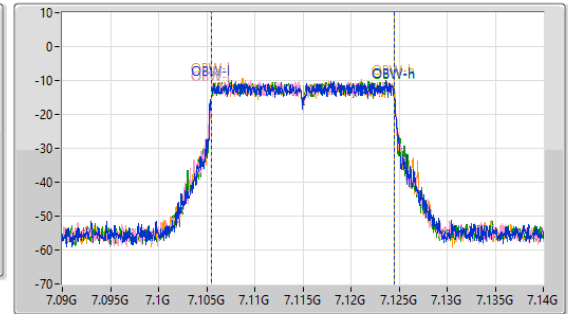
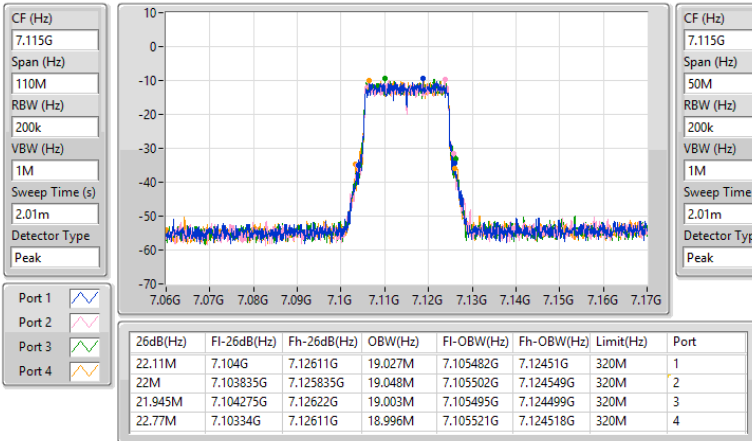


## 5.925-6.425GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW



5965MHz

05/08/2026

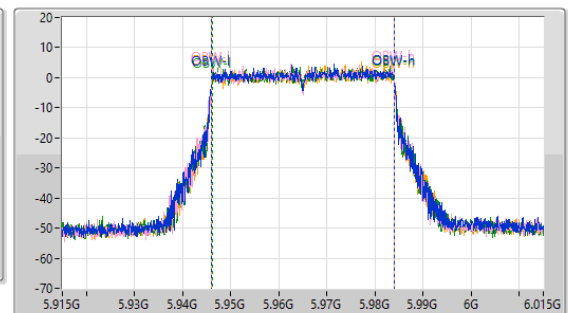
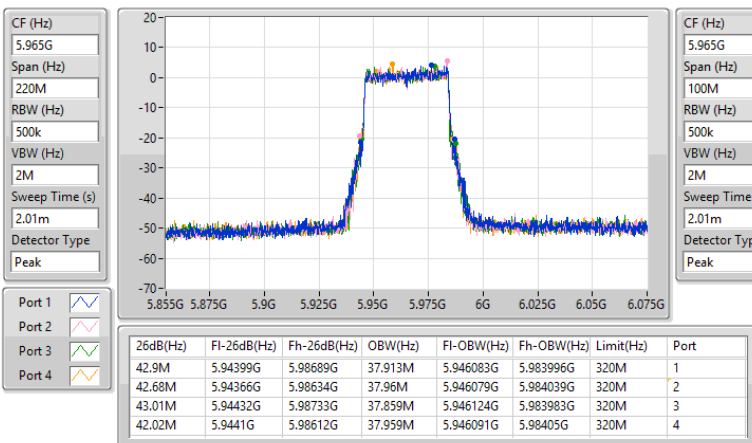


**5.925-6.425GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX**
**EBW**
**6205MHz**

05/08/2026

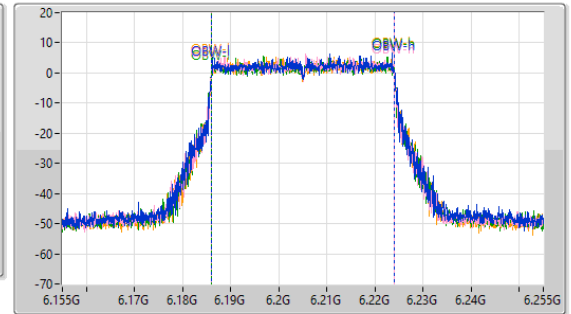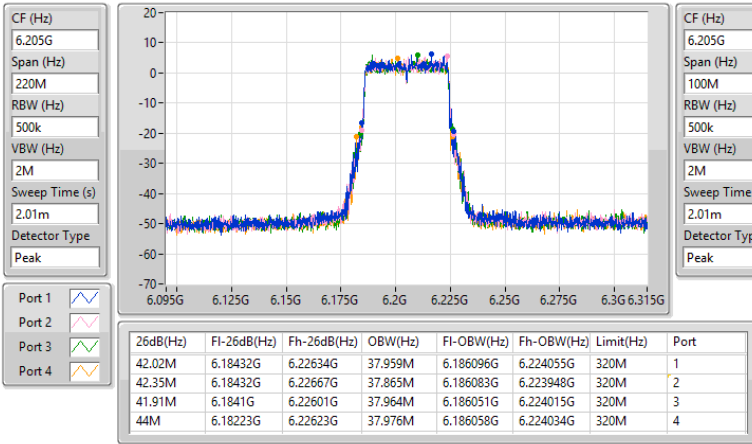
**5.925-6.425GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX**
**EBW**
**6405MHz**

05/08/2026

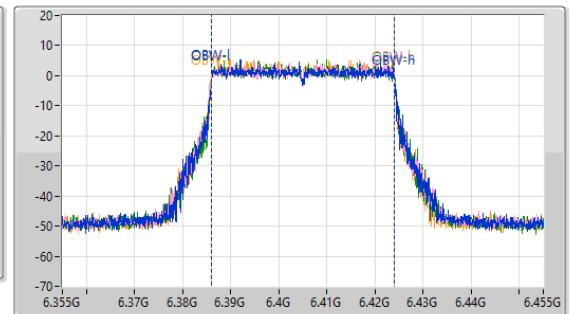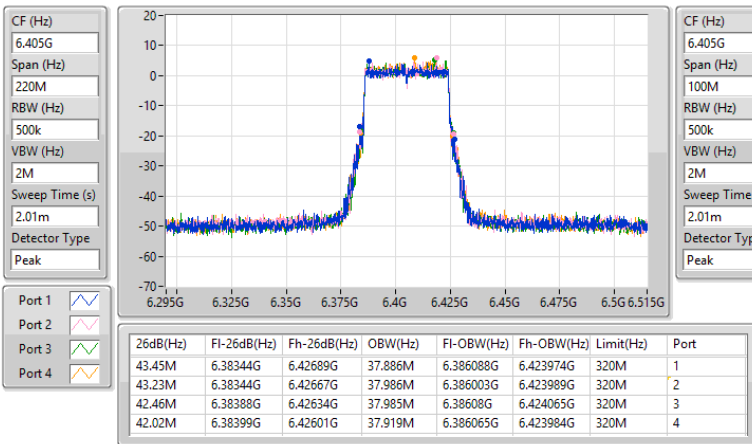


## 6.425-6.525GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW

6445MHz

05/08/2026

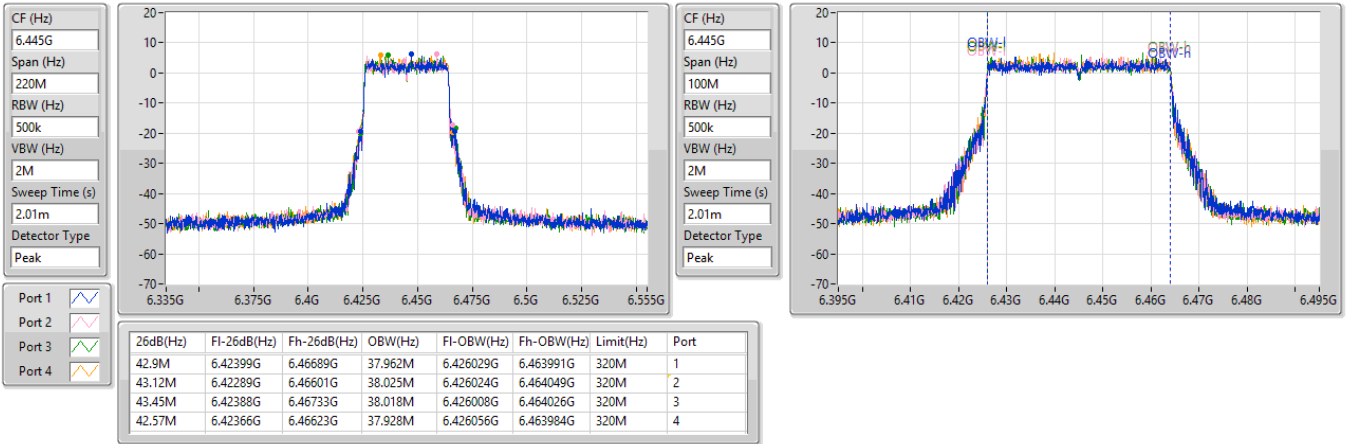


## 6.425-6.525GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW

6485MHz

05/08/2026


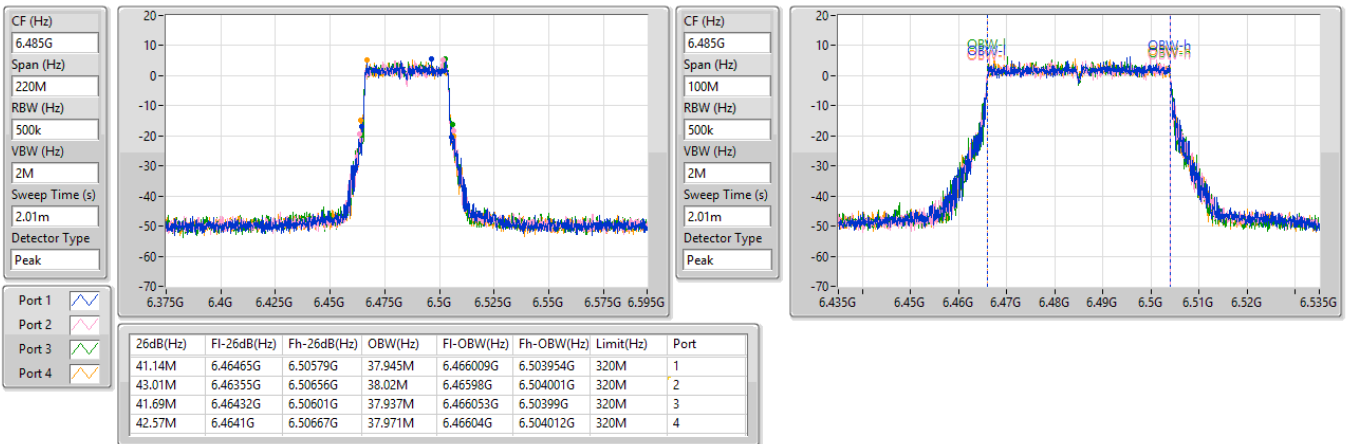


## 6.425-6.525GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW

6525MHz

05/08/2026

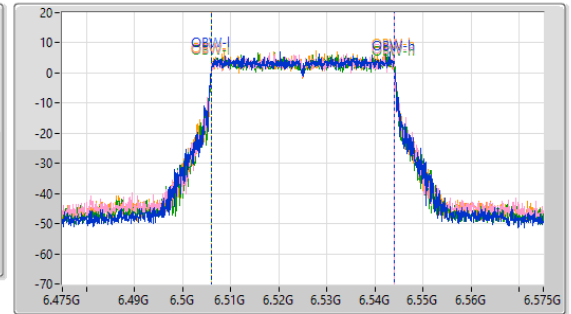
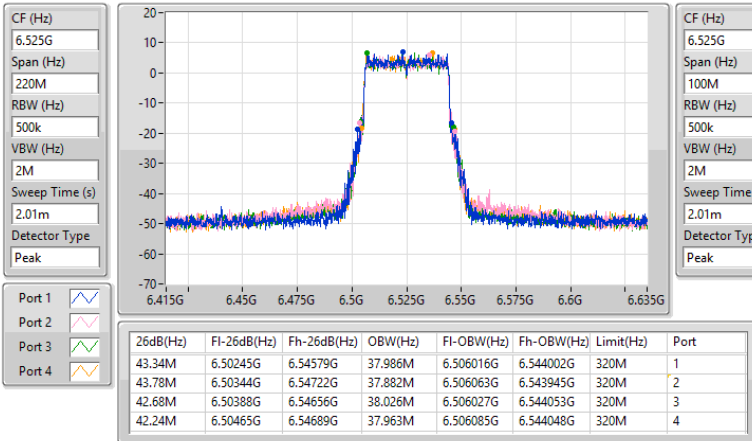


## 6.525-6.875GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW

6565MHz

05/08/2026

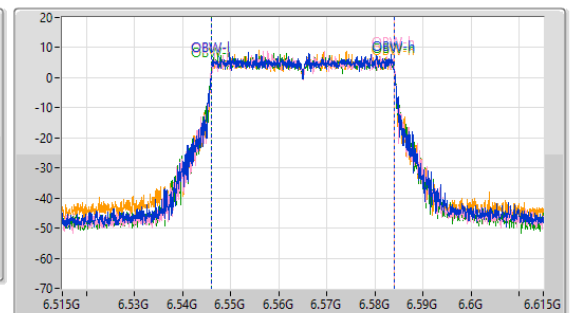
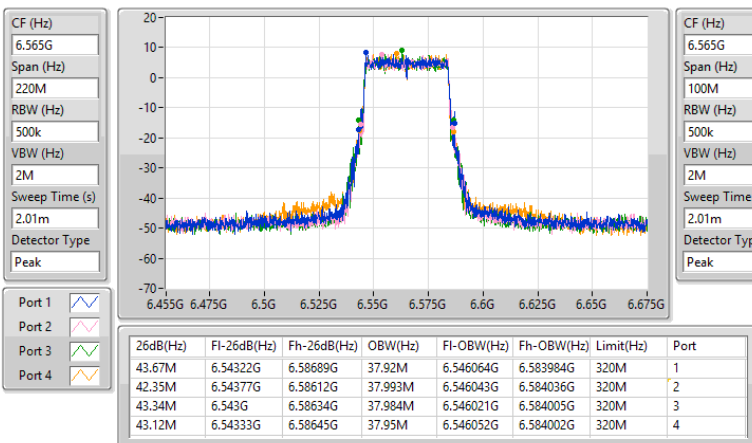


## 6.525-6.875GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW

6685MHz

05/08/2026

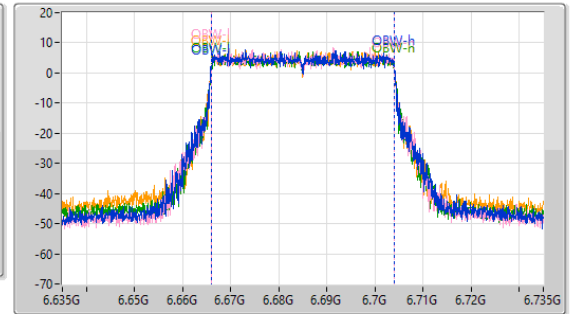
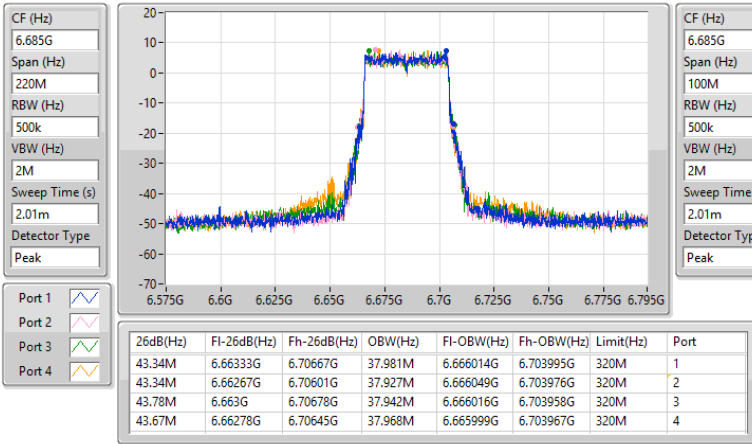


## 6.525-6.875GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX

EBW



6845MHz

05/08/2026

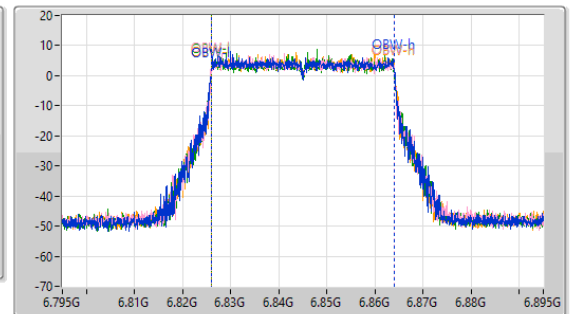
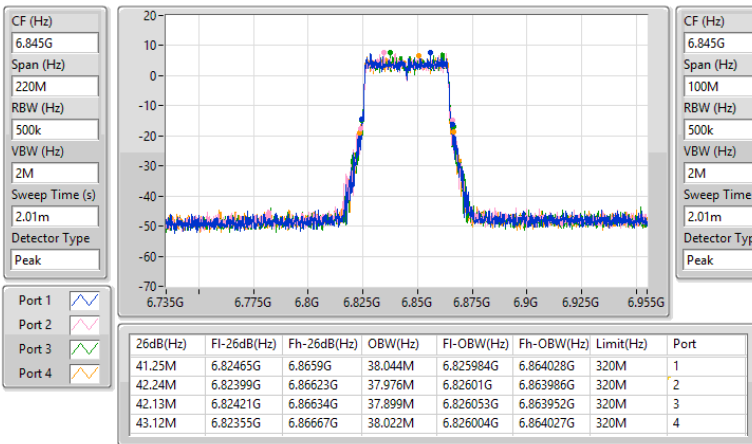


**6.525-6.875GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX**
**EBW**
**6885MHz**

05/08/2026

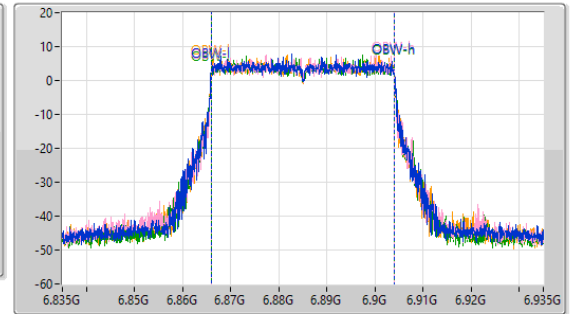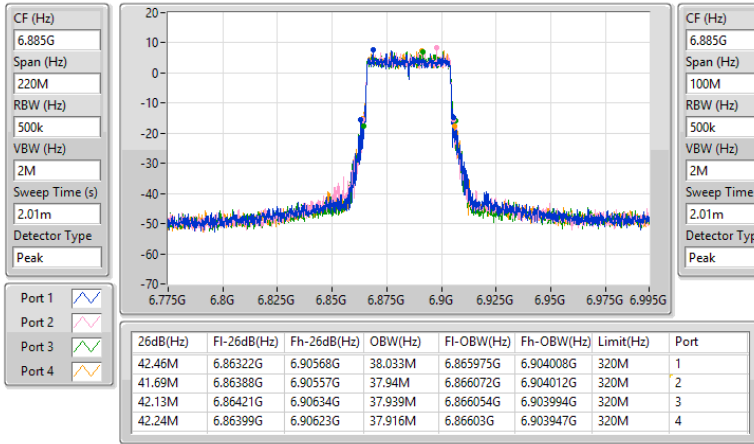

**6.875-7.125GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX**
**EBW**
**7005MHz**

05/08/2026

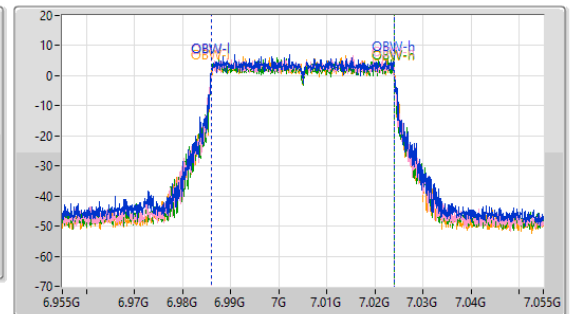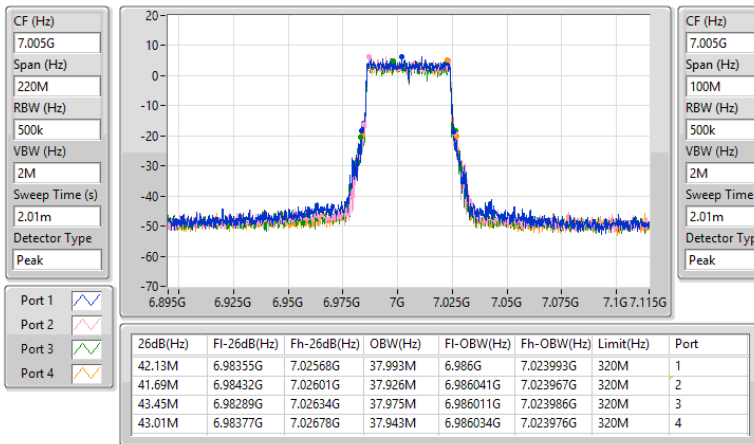


**6.875-7.125GHz\_802.11be EHT40\_Nss4,(MCS0)\_4TX**
**EBW**
**7085MHz**

05/08/2026

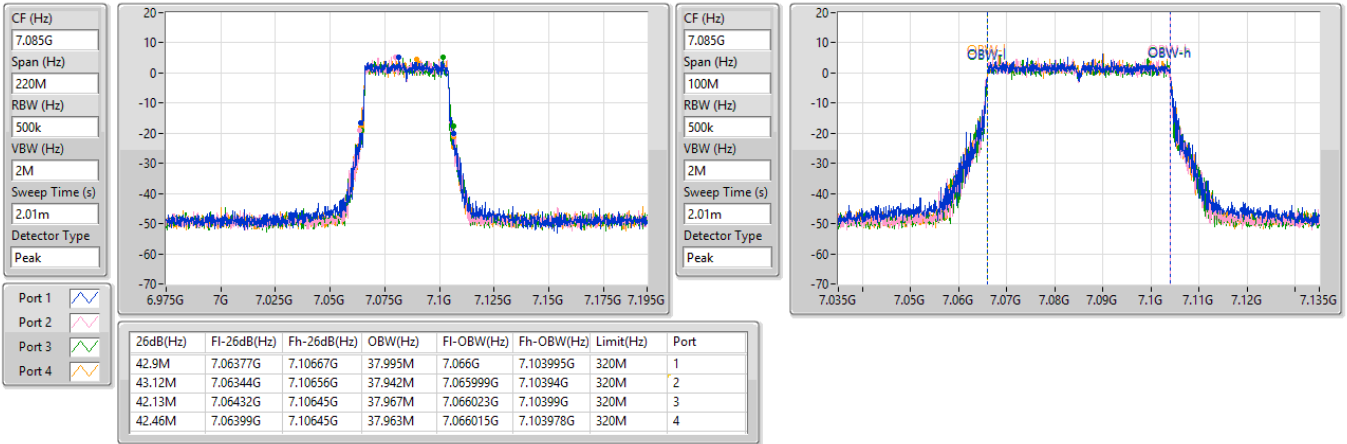
**5.925-6.425GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX**
**EBW**
**5985MHz**

05/08/2026


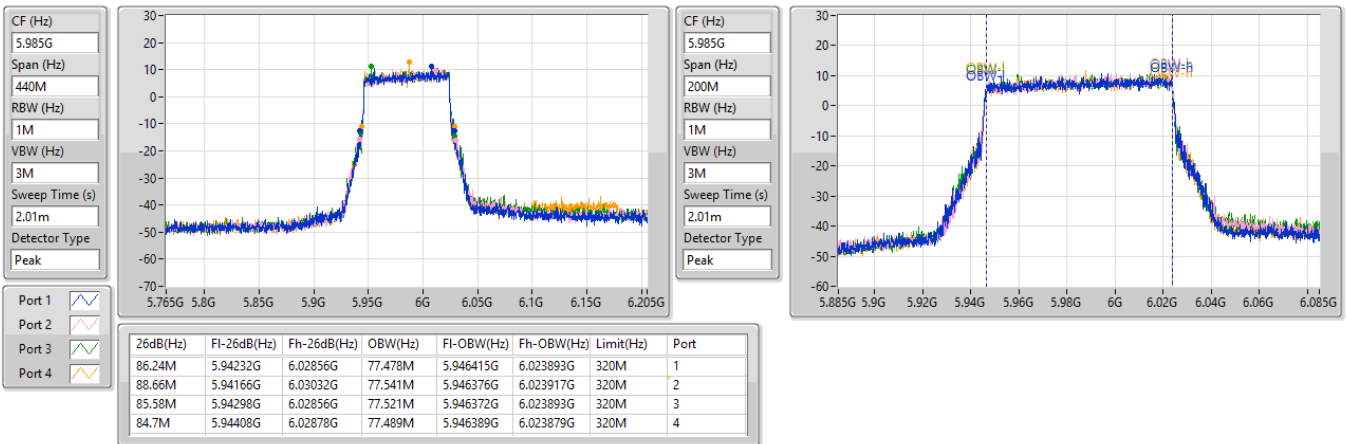


## 5.925-6.425GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6225MHz

05/08/2026

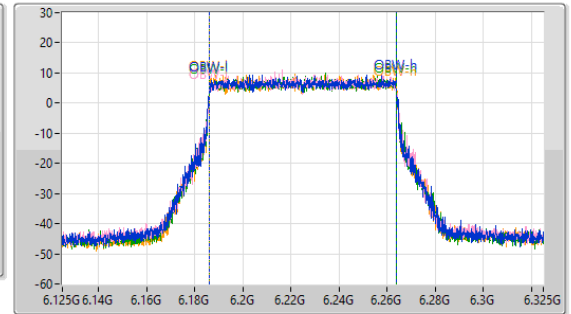
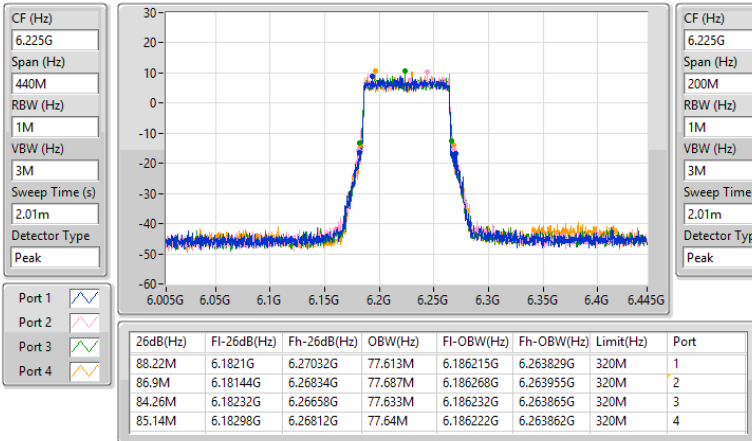


## 5.925-6.425GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6385MHz

05/08/2026

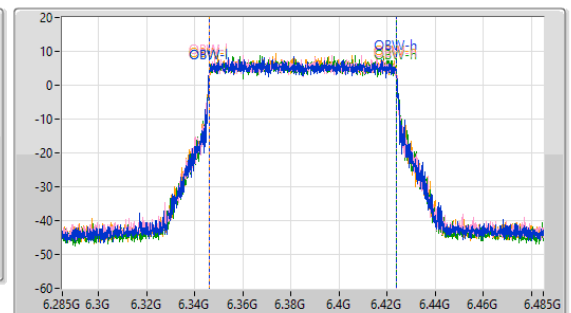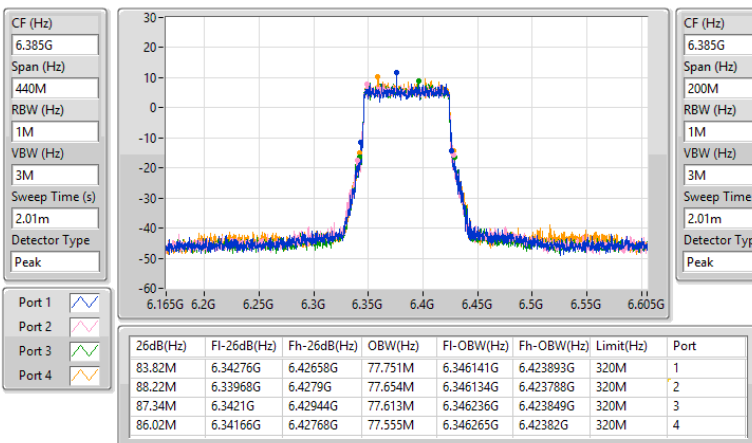


## 6.425-6.525GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6465MHz

05/08/2026

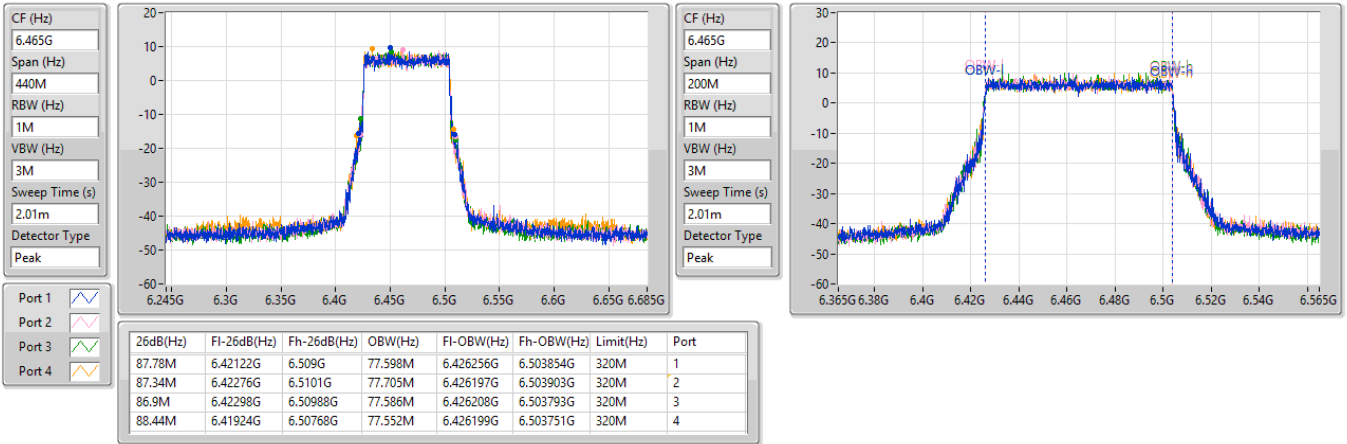


## 6.425-6.525GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6545MHz

05/08/2026


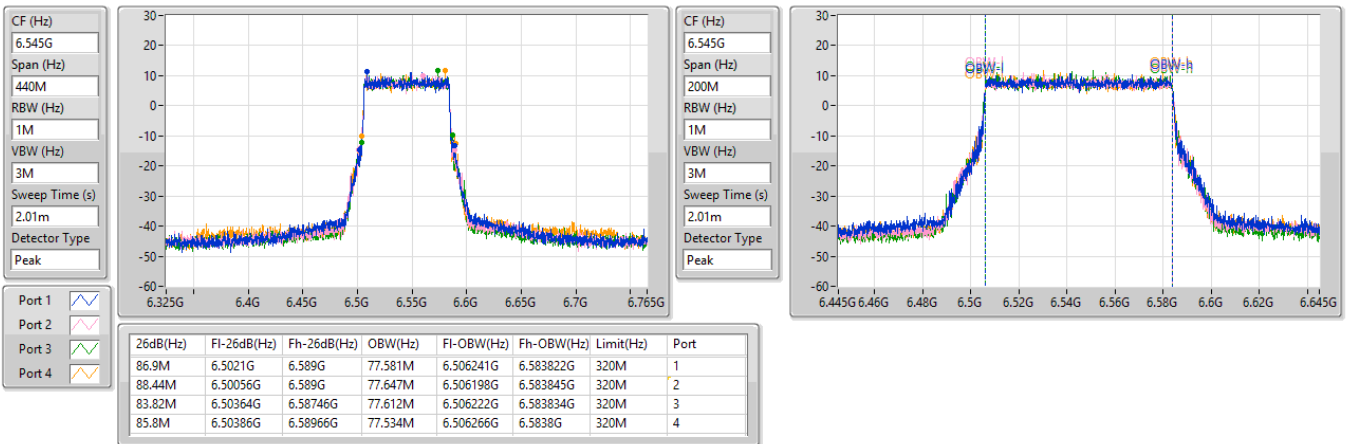


## 6.525-6.875GHz\_802.11be EHT80\_Nss4\_(MCS0)\_4TX

EBW

## 6625MHz

05/08/2026

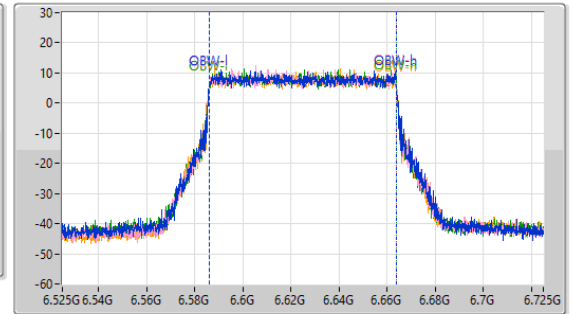
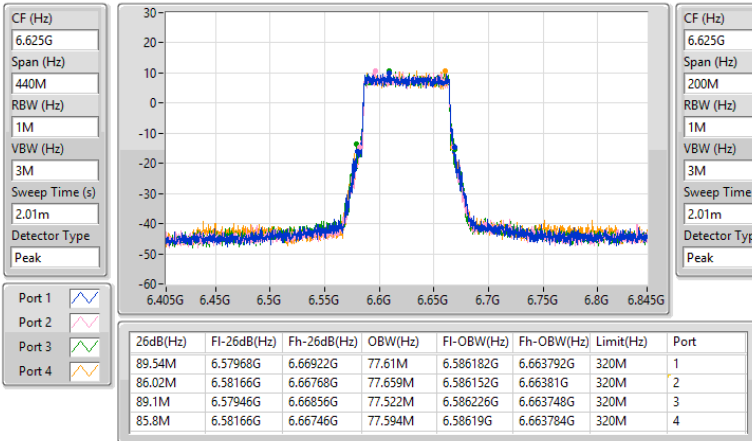


## 6.525-6.875GHz\_802.11be EHT80\_Nss4\_(MCS0)\_4TX

EBW

## 6705MHz

05/08/2026

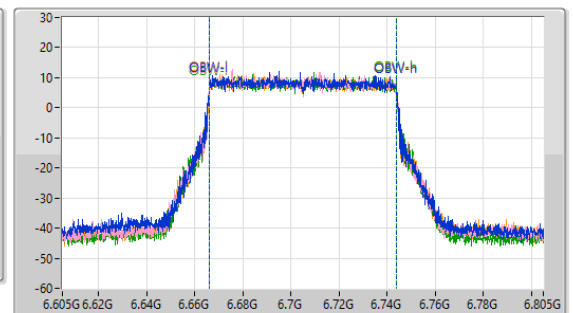
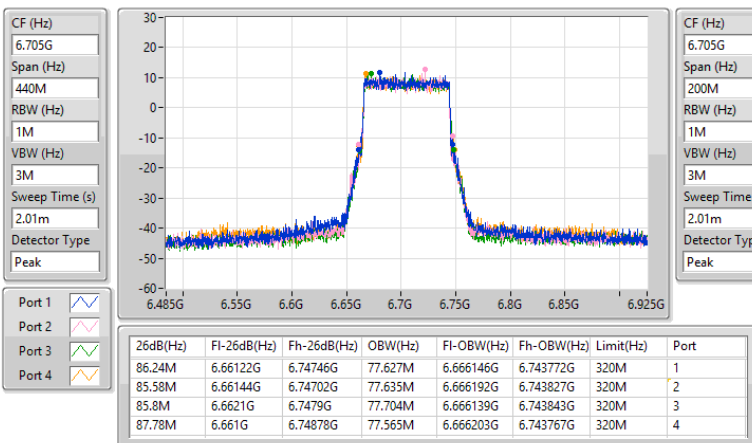


## 6.525-6.875GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6785MHz

05/08/2026

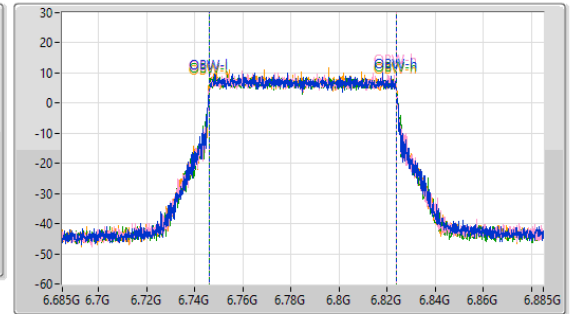
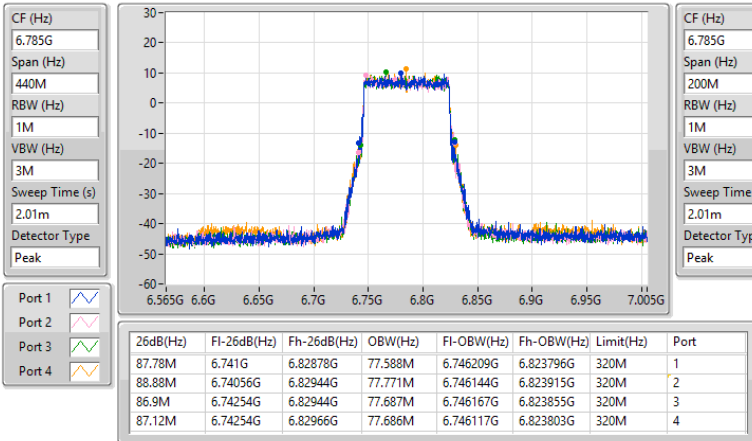


## 6.525-6.875GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6865MHz

05/08/2026

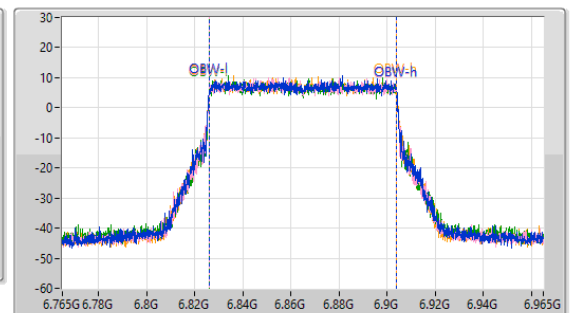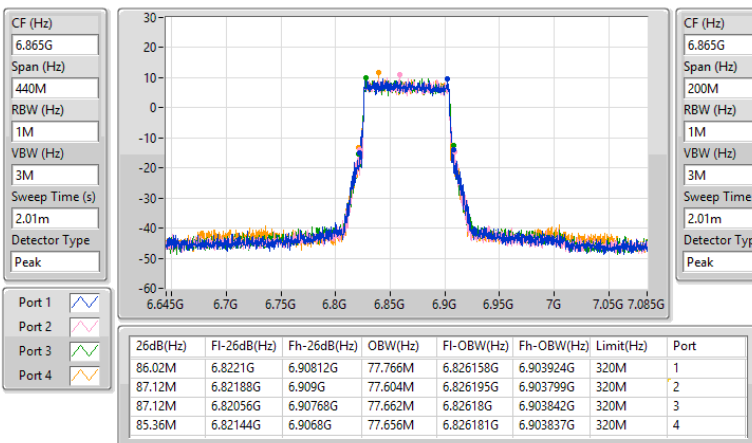


## 6.875-7.125GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

6945MHz

05/08/2026

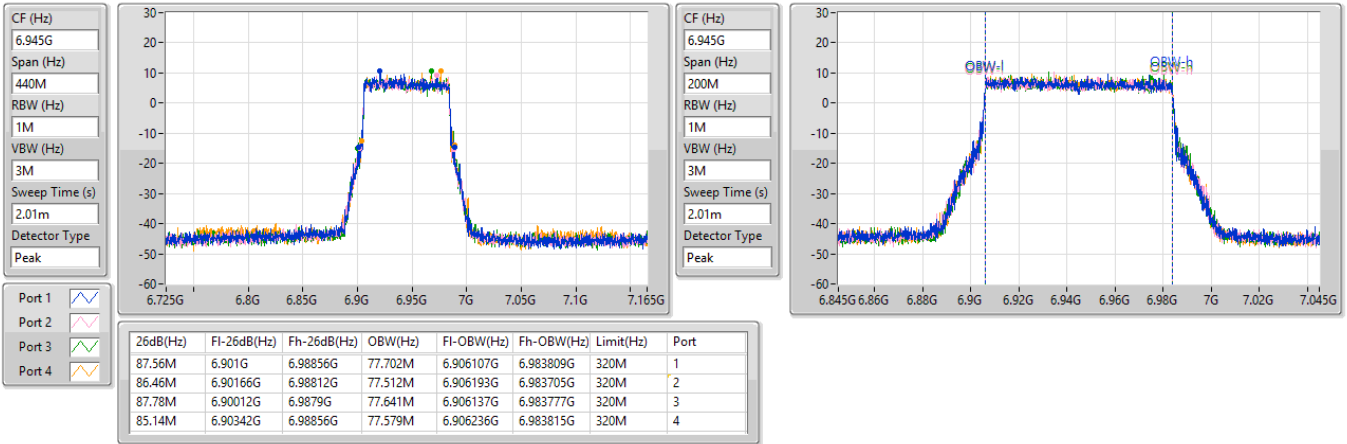


## 6.875-7.125GHz\_802.11be EHT80\_Nss4,(MCS0)\_4TX

EBW

7025MHz

05/08/2026


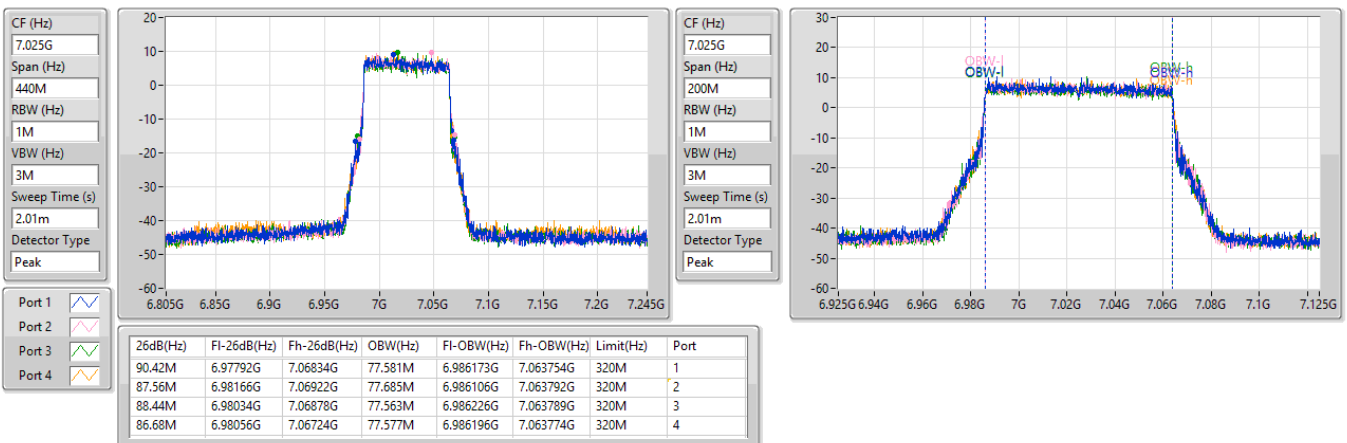


## 5.925-6.425GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6025MHz

05/08/2026

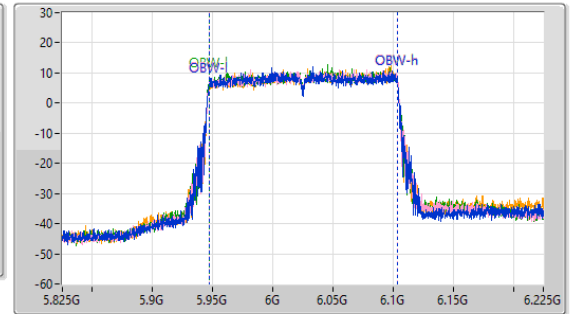
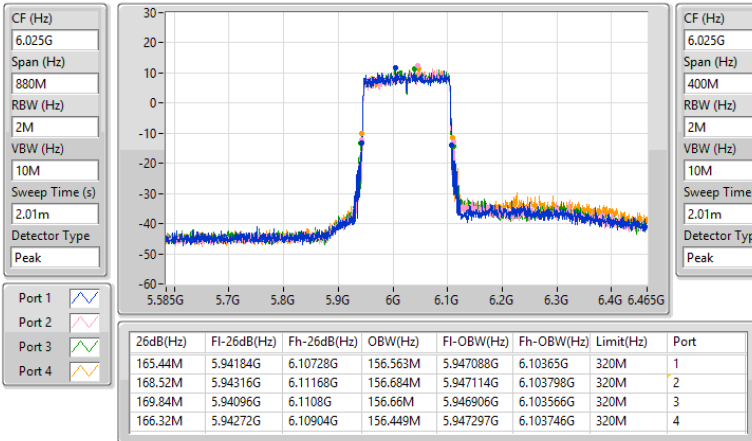


## 5.925-6.425GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6185MHz

05/08/2026

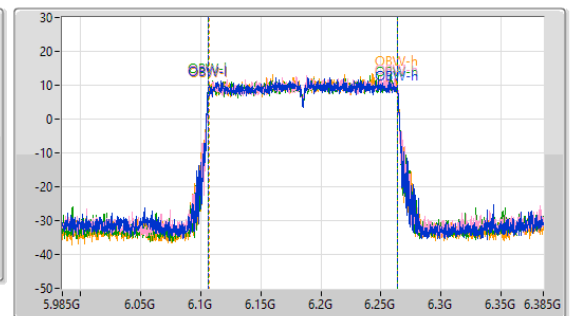
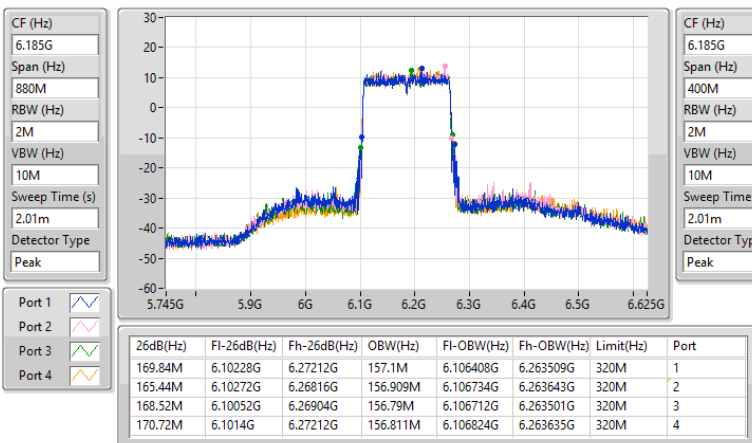


## 5.925-6.425GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6345MHz

05/08/2026

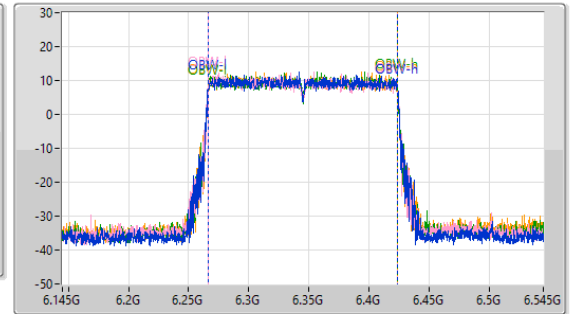
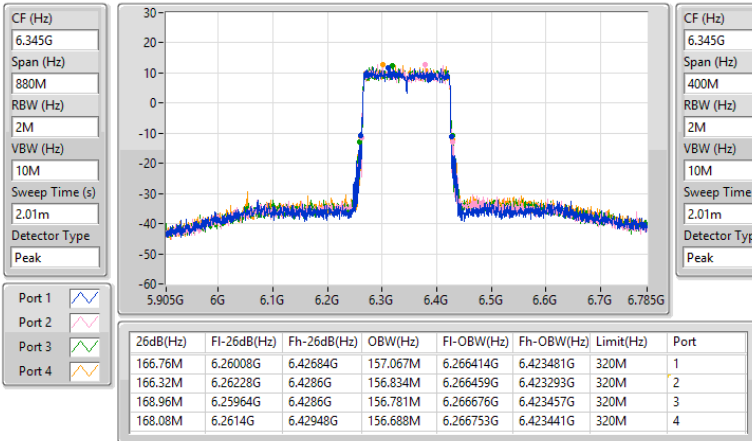


## 6.425-6.525GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6505MHz

05/08/2026

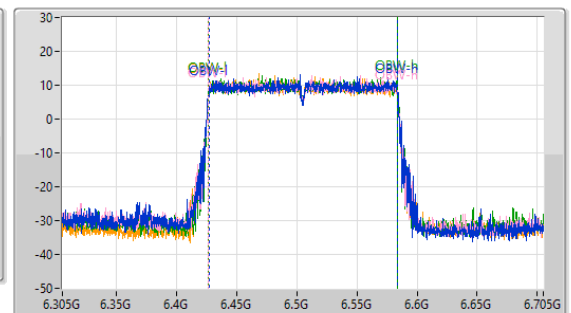
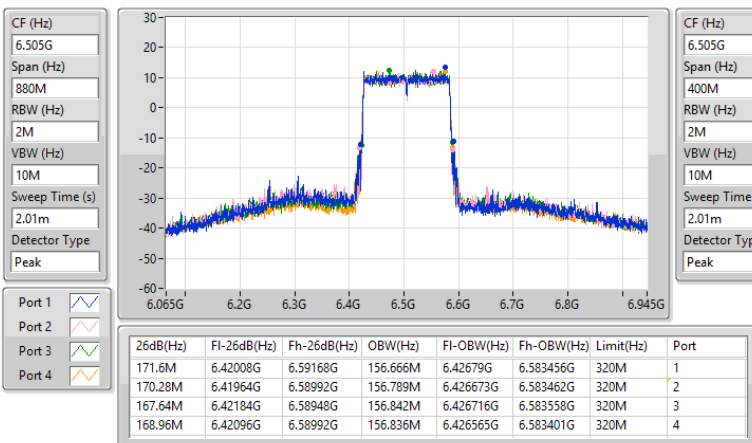


## 6.525-6.875GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6665MHz

05/08/2026

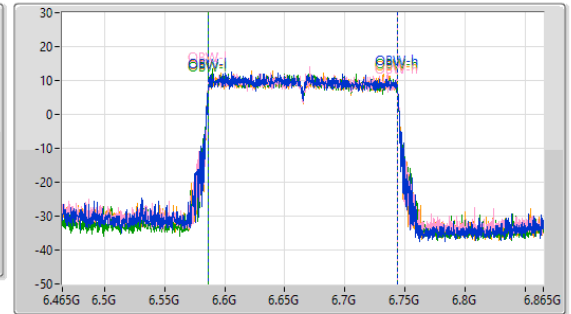
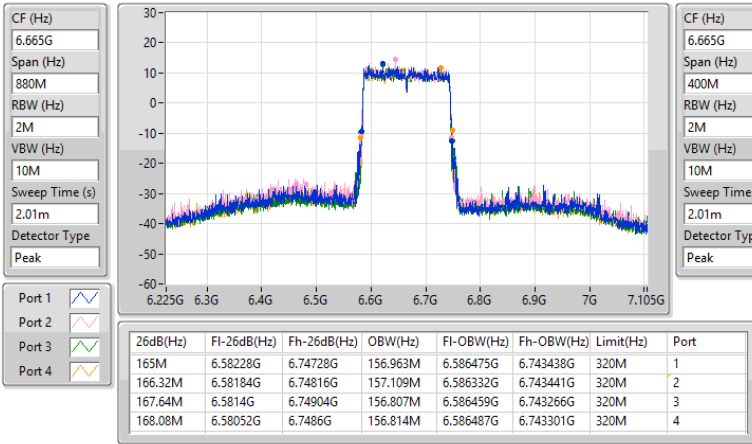


## 6.525-6.875GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6825MHz

05/08/2026

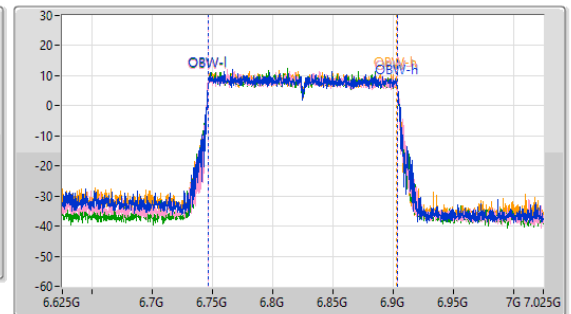
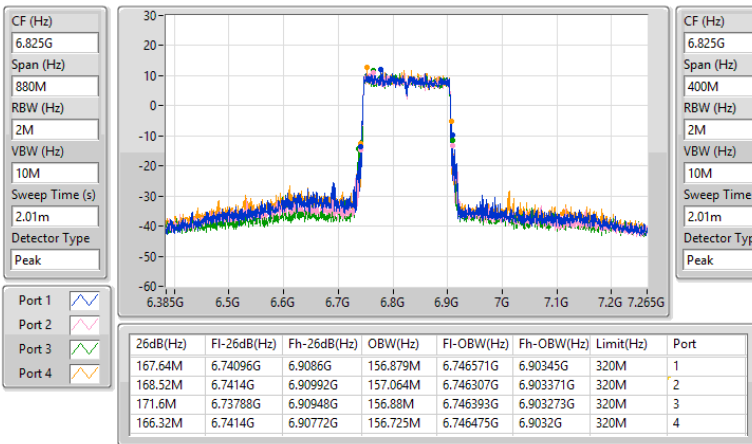


## 6.875-7.125GHz\_802.11be EHT160\_Nss4,(MCS0)\_4TX

EBW

6985MHz

05/08/2026

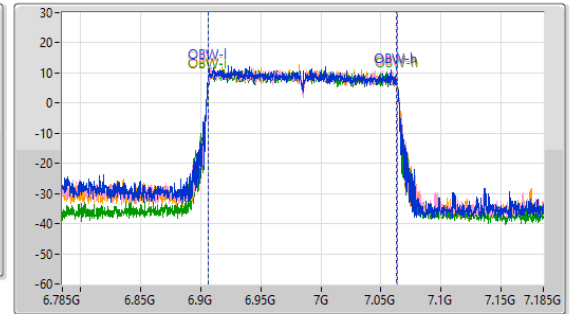
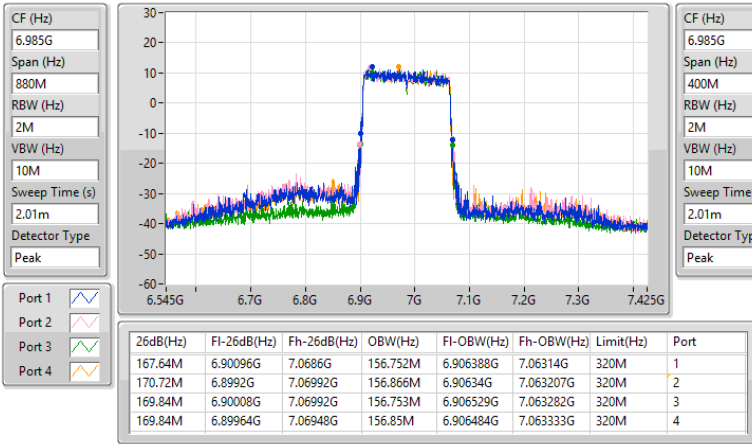


## 5.925-6.425GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX

EBW



6105MHz

05/08/2026

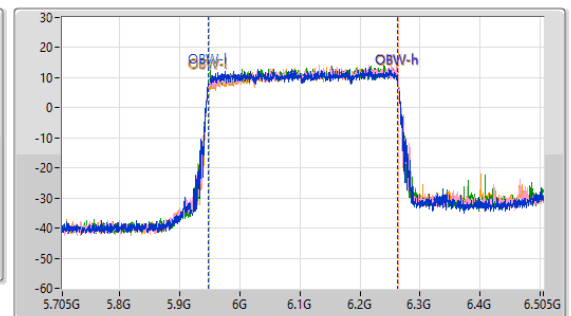
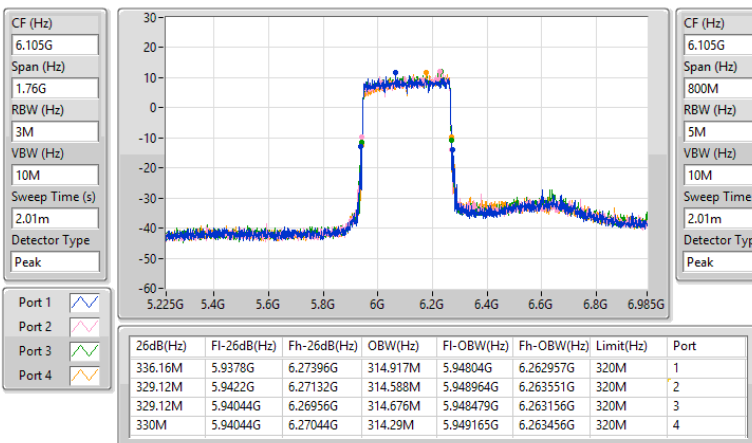


**5.925-6.425GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX**
**EBW**
**6265MHz**

05/08/2026

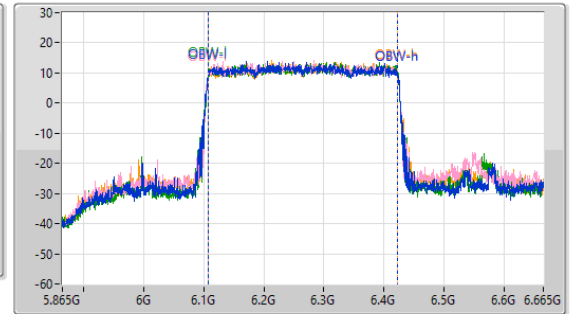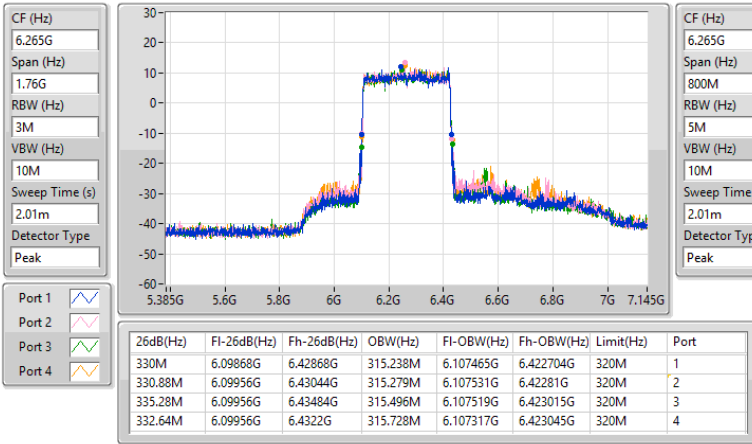
**5.925-6.425GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX**
**EBW**
**6425MHz**

05/08/2026

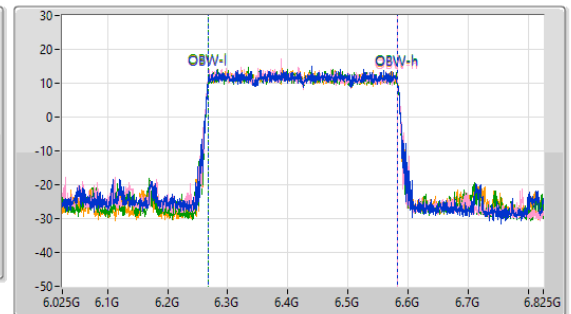
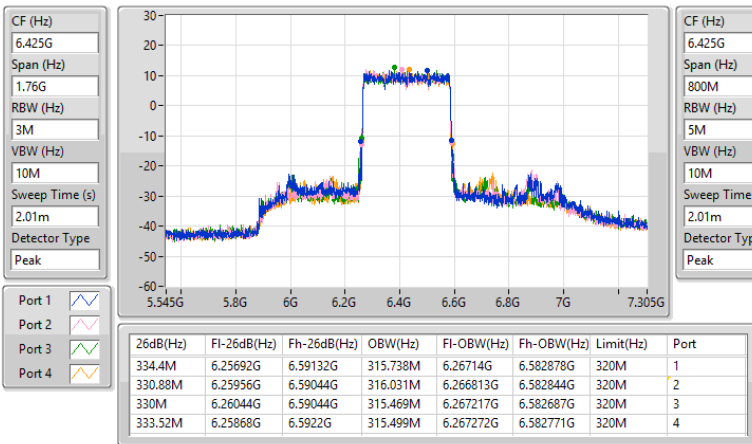


## 6.425-6.525GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX

EBW

6585MHz

05/08/2026

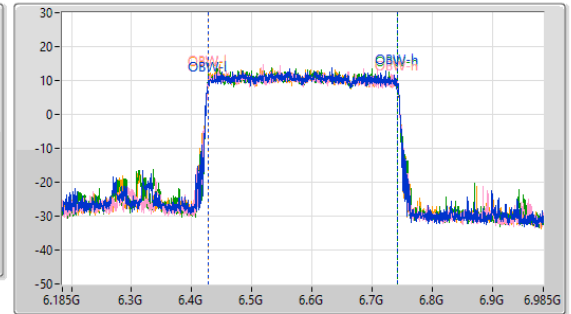
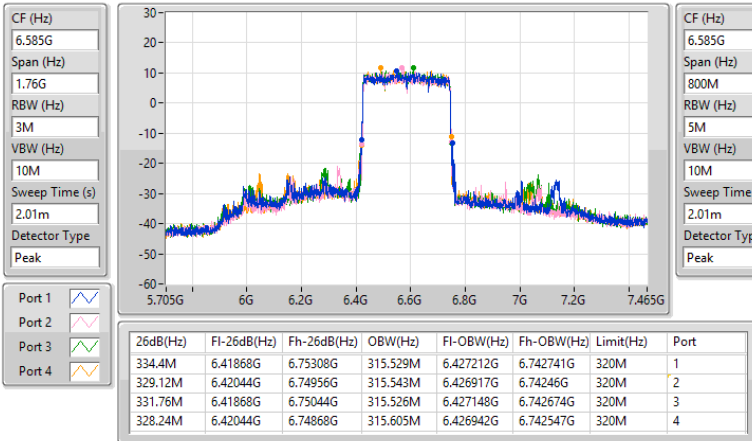


## 6.525-6.875GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX

EBW

6745MHz

05/08/2026

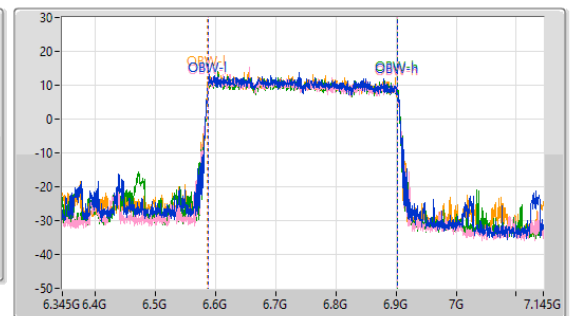
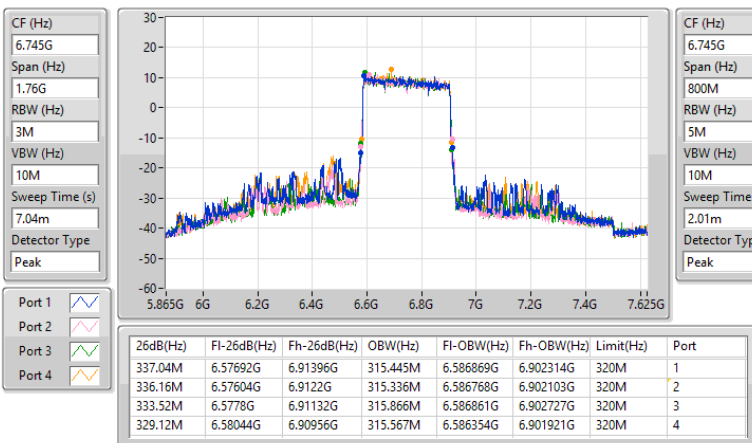


6.525-6.875GHz\_802.11be EHT320\_Nss4,(MCS0)\_4TX

EBW

6905MHz

05/08/2026

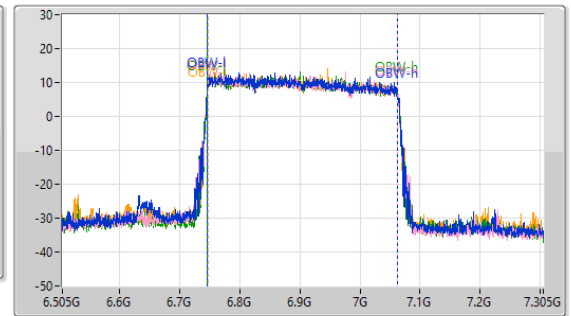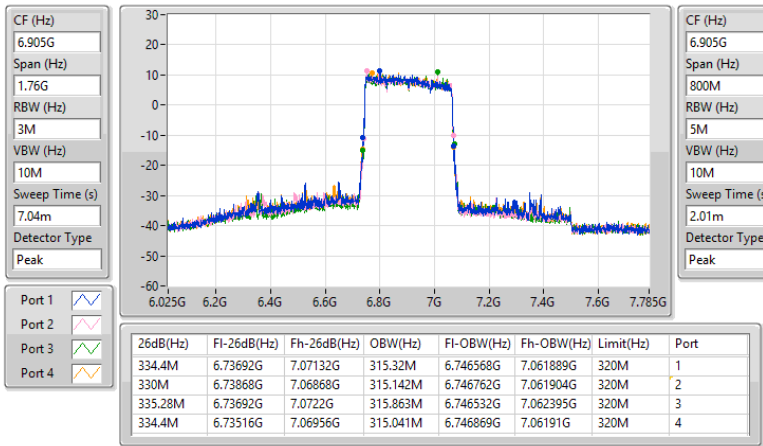

## Summary

| Mode                            | EIRP<br>(dBm) | EIRP<br>(W) |
|---------------------------------|---------------|-------------|
| 5.925-6.425GHz                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_4TX        | 14.91         | 0.03097     |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 14.94         | 0.03119     |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 19.09         | 0.08110     |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 16.94         | 0.04943     |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 20.05         | 0.10116     |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 20.11         | 0.10257     |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 24.72         | 0.29648     |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 22.52         | 0.17865     |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 26.32         | 0.42855     |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 24.93         | 0.31117     |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 26.91         | 0.49091     |
| 6.425-6.525GHz                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_4TX        | 13.85         | 0.02427     |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 13.30         | 0.02138     |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 17.97         | 0.06266     |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 16.06         | 0.04036     |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 19.89         | 0.09750     |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 19.01         | 0.07962     |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 25.55         | 0.35892     |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 21.55         | 0.14289     |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 25.44         | 0.34995     |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 25.23         | 0.33343     |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 26.49         | 0.44566     |
| 6.525-6.875GHz                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_4TX        | 13.20         | 0.02089     |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 14.96         | 0.03133     |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 18.38         | 0.06887     |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 16.75         | 0.04732     |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 20.90         | 0.12303     |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 19.42         | 0.08750     |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 24.99         | 0.31550     |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 21.29         | 0.13459     |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 25.93         | 0.39174     |
| 802.11be EHT320_Nss1,(MCS0)_4TX | 26.27         | 0.42364     |
| 802.11be EHT320_Nss4,(MCS0)_4TX | 26.52         | 0.44875     |
| 6.875-7.125GHz                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_4TX        | 13.02         | 0.02004     |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | 14.14         | 0.02594     |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | 16.77         | 0.04753     |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | 16.19         | 0.04159     |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | 19.78         | 0.09506     |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | 22.19         | 0.16558     |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | 22.93         | 0.19634     |
| 802.11be EHT160_Nss1,(MCS0)_4TX | 25.56         | 0.35975     |
| 802.11be EHT160_Nss4,(MCS0)_4TX | 25.78         | 0.37844     |

**Result**

| Mode                            | Result | EIRP<br>(dBm) | EIRP Limit<br>(dBm) |
|---------------------------------|--------|---------------|---------------------|
| 802.11a_Nss1,(6Mbps)_4TX        | -      | -             | -                   |
| 5955MHz                         | Pass   | 14.91         | 30.00               |
| 6195MHz                         | Pass   | 13.80         | 30.00               |
| 6415MHz                         | Pass   | 13.68         | 30.00               |
| 6435MHz                         | Pass   | 13.69         | 30.00               |
| 6475MHz                         | Pass   | 13.85         | 30.00               |
| 6515MHz                         | Pass   | 13.35         | 30.00               |
| 6535MHz                         | Pass   | 12.62         | 30.00               |
| 6695MHz                         | Pass   | 13.10         | 30.00               |
| 6855MHz                         | Pass   | 13.20         | 30.00               |
| 6875MHz                         | Pass   | 12.46         | 30.00               |
| 6995MHz                         | Pass   | 12.20         | 30.00               |
| 7095MHz                         | Pass   | 13.02         | 30.00               |
| 7115MHz                         | Pass   | 10.30         | 30.00               |
| 802.11be EHT20_Nss1,(MCS0)_4TX  | -      | -             | -                   |
| 5955MHz                         | Pass   | 13.48         | 30.00               |
| 6195MHz                         | Pass   | 14.94         | 30.00               |
| 6415MHz                         | Pass   | 13.30         | 30.00               |
| 6435MHz                         | Pass   | 13.30         | 30.00               |
| 6475MHz                         | Pass   | 13.18         | 30.00               |
| 6515MHz                         | Pass   | 13.13         | 30.00               |
| 6535MHz                         | Pass   | 12.38         | 30.00               |
| 6695MHz                         | Pass   | 14.42         | 30.00               |
| 6855MHz                         | Pass   | 14.96         | 30.00               |
| 6875MHz                         | Pass   | 13.54         | 30.00               |
| 6995MHz                         | Pass   | 14.14         | 30.00               |
| 7095MHz                         | Pass   | 13.44         | 30.00               |
| 7115MHz                         | Pass   | 9.79          | 30.00               |
| 802.11be EHT40_Nss1,(MCS0)_4TX  | -      | -             | -                   |
| 5965MHz                         | Pass   | 16.94         | 30.00               |
| 6205MHz                         | Pass   | 16.43         | 30.00               |
| 6405MHz                         | Pass   | 16.14         | 30.00               |
| 6445MHz                         | Pass   | 16.06         | 30.00               |
| 6485MHz                         | Pass   | 15.92         | 30.00               |
| 6525MHz                         | Pass   | 15.61         | 30.00               |
| 6565MHz                         | Pass   | 16.36         | 30.00               |
| 6685MHz                         | Pass   | 16.19         | 30.00               |
| 6845MHz                         | Pass   | 16.75         | 30.00               |
| 6885MHz                         | Pass   | 15.79         | 30.00               |
| 7005MHz                         | Pass   | 16.19         | 30.00               |
| 7085MHz                         | Pass   | 15.72         | 30.00               |
| 802.11be EHT80_Nss1,(MCS0)_4TX  | -      | -             | -                   |
| 5985MHz                         | Pass   | 19.38         | 30.00               |
| 6225MHz                         | Pass   | 20.03         | 30.00               |
| 6385MHz                         | Pass   | 20.11         | 30.00               |
| 6465MHz                         | Pass   | 19.01         | 30.00               |
| 6545MHz                         | Pass   | 18.50         | 30.00               |
| 6625MHz                         | Pass   | 18.35         | 30.00               |
| 6705MHz                         | Pass   | 18.67         | 30.00               |
| 6785MHz                         | Pass   | 19.42         | 30.00               |
| 6865MHz                         | Pass   | 18.57         | 30.00               |
| 6945MHz                         | Pass   | 20.25         | 30.00               |
| 7025MHz                         | Pass   | 22.19         | 30.00               |
| 802.11be EHT160_Nss1,(MCS0)_4TX | -      | -             | -                   |
| 6025MHz                         | Pass   | 21.56         | 30.00               |

| Mode                            | Result | EIRP (dBm) | EIRP Limit (dBm) |
|---------------------------------|--------|------------|------------------|
| 6185MHz                         | Pass   | 22.52      | 30.00            |
| 6345MHz                         | Pass   | 21.90      | 30.00            |
| 6505MHz                         | Pass   | 21.55      | 30.00            |
| 6665MHz                         | Pass   | 21.14      | 30.00            |
| 6825MHz                         | Pass   | 21.29      | 30.00            |
| 6985MHz                         | Pass   | 25.56      | 30.00            |
| 802.11be EHT320_Nss1,(MCS0)_4TX | -      | -          | -                |
| 6105MHz                         | Pass   | 24.93      | 30.00            |
| 6265MHz                         | Pass   | 23.55      | 30.00            |
| 6425MHz                         | Pass   | 24.27      | 30.00            |
| 6585MHz                         | Pass   | 25.23      | 30.00            |
| 6745MHz                         | Pass   | 24.91      | 30.00            |
| 6905MHz                         | Pass   | 26.27      | 30.00            |
| 802.11be EHT20_Nss4,(MCS0)_4TX  | -      | -          | -                |
| 5955MHz                         | Pass   | 16.16      | 30.00            |
| 6195MHz                         | Pass   | 19.09      | 30.00            |
| 6415MHz                         | Pass   | 17.13      | 30.00            |
| 6435MHz                         | Pass   | 17.21      | 30.00            |
| 6475MHz                         | Pass   | 16.90      | 30.00            |
| 6515MHz                         | Pass   | 17.97      | 30.00            |
| 6535MHz                         | Pass   | 16.92      | 30.00            |
| 6695MHz                         | Pass   | 18.29      | 30.00            |
| 6855MHz                         | Pass   | 18.38      | 30.00            |
| 6875MHz                         | Pass   | 16.81      | 30.00            |
| 6995MHz                         | Pass   | 16.77      | 30.00            |
| 7095MHz                         | Pass   | 16.53      | 30.00            |
| 7115MHz                         | Pass   | 7.18       | 30.00            |
| 802.11be EHT40_Nss4,(MCS0)_4TX  | -      | -          | -                |
| 5965MHz                         | Pass   | 18.98      | 30.00            |
| 6205MHz                         | Pass   | 19.49      | 30.00            |
| 6405MHz                         | Pass   | 20.05      | 30.00            |
| 6445MHz                         | Pass   | 19.73      | 30.00            |
| 6485MHz                         | Pass   | 18.75      | 30.00            |
| 6525MHz                         | Pass   | 19.89      | 30.00            |
| 6565MHz                         | Pass   | 20.90      | 30.00            |
| 6685MHz                         | Pass   | 20.41      | 30.00            |
| 6845MHz                         | Pass   | 19.60      | 30.00            |
| 6885MHz                         | Pass   | 19.35      | 30.00            |
| 7005MHz                         | Pass   | 19.78      | 30.00            |
| 7085MHz                         | Pass   | 19.67      | 30.00            |
| 802.11be EHT80_Nss4,(MCS0)_4TX  | -      | -          | -                |
| 5985MHz                         | Pass   | 24.72      | 30.00            |
| 6225MHz                         | Pass   | 22.26      | 30.00            |
| 6385MHz                         | Pass   | 22.43      | 30.00            |
| 6465MHz                         | Pass   | 25.55      | 30.00            |
| 6545MHz                         | Pass   | 22.84      | 30.00            |
| 6625MHz                         | Pass   | 24.99      | 30.00            |
| 6705MHz                         | Pass   | 24.21      | 30.00            |
| 6785MHz                         | Pass   | 22.09      | 30.00            |
| 6865MHz                         | Pass   | 21.85      | 30.00            |
| 6945MHz                         | Pass   | 22.58      | 30.00            |
| 7025MHz                         | Pass   | 22.93      | 30.00            |
| 802.11be EHT160_Nss4,(MCS0)_4TX | -      | -          | -                |
| 6025MHz                         | Pass   | 25.29      | 30.00            |
| 6185MHz                         | Pass   | 26.05      | 30.00            |
| 6345MHz                         | Pass   | 26.32      | 30.00            |

| Mode                            | Result | EIRP<br>(dBm) | EIRP Limit<br>(dBm) |
|---------------------------------|--------|---------------|---------------------|
| 6505MHz                         | Pass   | 25.44         | 30.00               |
| 6665MHz                         | Pass   | 25.93         | 30.00               |
| 6825MHz                         | Pass   | 24.91         | 30.00               |
| 6985MHz                         | Pass   | 25.78         | 30.00               |
| 802.11be EHT320_Nss4,(MCS0)_4TX | -      | -             | -                   |
| 6105MHz                         | Pass   | 26.30         | 30.00               |
| 6265MHz                         | Pass   | 26.35         | 30.00               |
| 6425MHz                         | Pass   | 26.91         | 30.00               |
| 6585MHz                         | Pass   | 26.49         | 30.00               |
| 6745MHz                         | Pass   | 25.63         | 30.00               |
| 6905MHz                         | Pass   | 26.52         | 30.00               |

DG = Directional Gain; Port X = Port X output power  
 Inf = There's no restriction for the limit.

29/07/2026

EIRP;Band:6.2G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:5955MHz;TX

CF Freq  
5.955GHz

Span  
50MHz


RBW  
1MHz

VBW  
3MHz

Sweep Time  
1.01ms

Detector Type  
RMS

CP BW  
20MHz

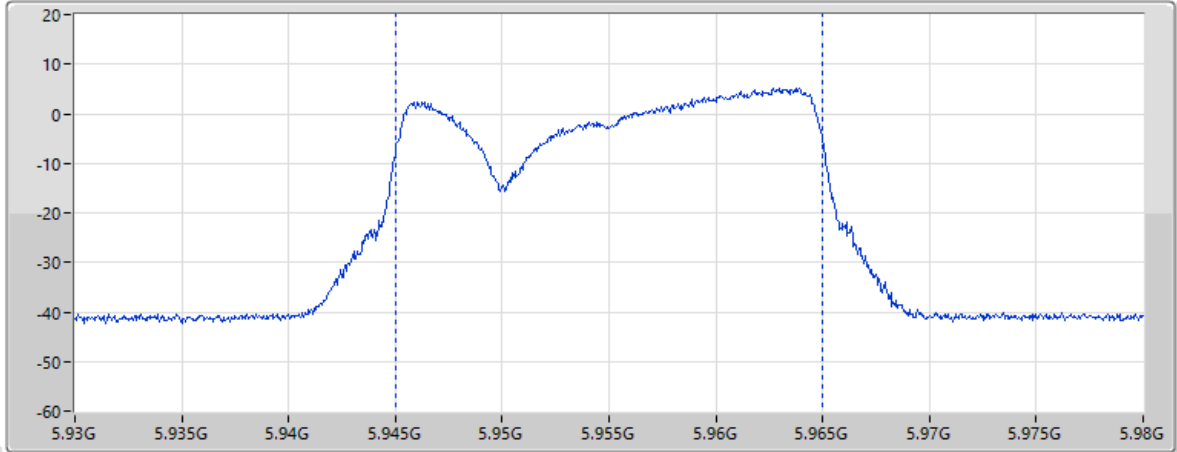

Page 10

Horizontal

|            |          |                                                             |           |         |
|------------|----------|-------------------------------------------------------------|-----------|---------|
| EIRP (dBm) |          | EIRP=Pr+Lp [Lp Free Space Path Loss]<br>Pr=Pmeas-Gr+Lc-Gamp |           |         |
| 14.91      |          |                                                             |           |         |
| Pmeas      | Gr (dBi) | Lc (dB)                                                     | Gamp (dB) | Lp (dB) |
| -3.12      | 13.40    | 7.63                                                        | 33.74     | 57.54   |

29/07/2026

EIRP;Band:6.2G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6195MHz;TX

CF Freq  
6.195GHz

Span  
50MHz


RBW  
1MHz

VBW  
3MHz

Sweep Time  
1.01ms

Detector Type  
RMS

CP BW  
20MHz

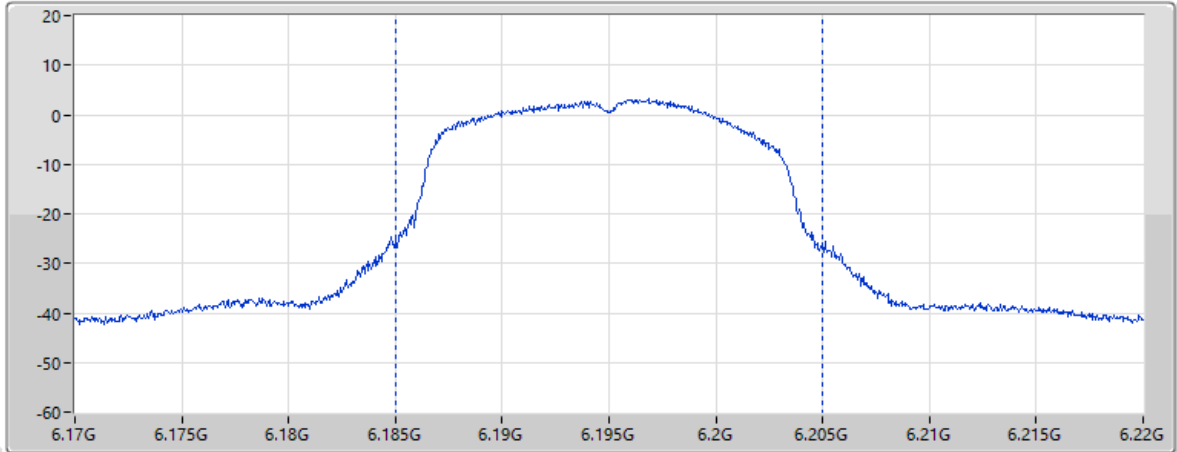


Page 10

Horizontal

|            |          |                                                             |           |         |
|------------|----------|-------------------------------------------------------------|-----------|---------|
| EIRP (dBm) |          | EIRP=Pr+Lp [Lp Free Space Path Loss]<br>Pr=Pmeas-Gr+Lc-Gamp |           |         |
| 13.8       |          |                                                             |           |         |
| Pmeas      | Gr (dBi) | Lc (dB)                                                     | Gamp (dB) | Lp (dB) |
| -4.67      | 13.21    | 7.58                                                        | 33.78     | 57.88   |


29/07/2026

EIRP:Band:6.2G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6415MHz;TX

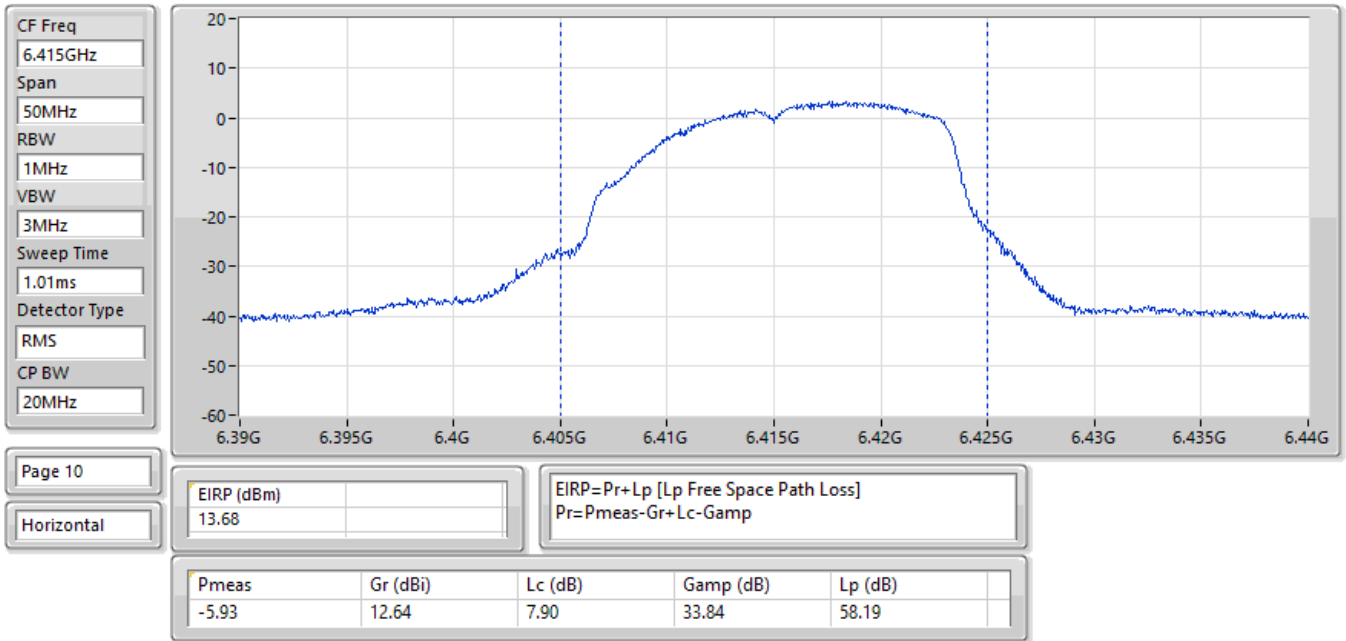


29/07/2026

EIRP:Band:6.4G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6435MHz;TX

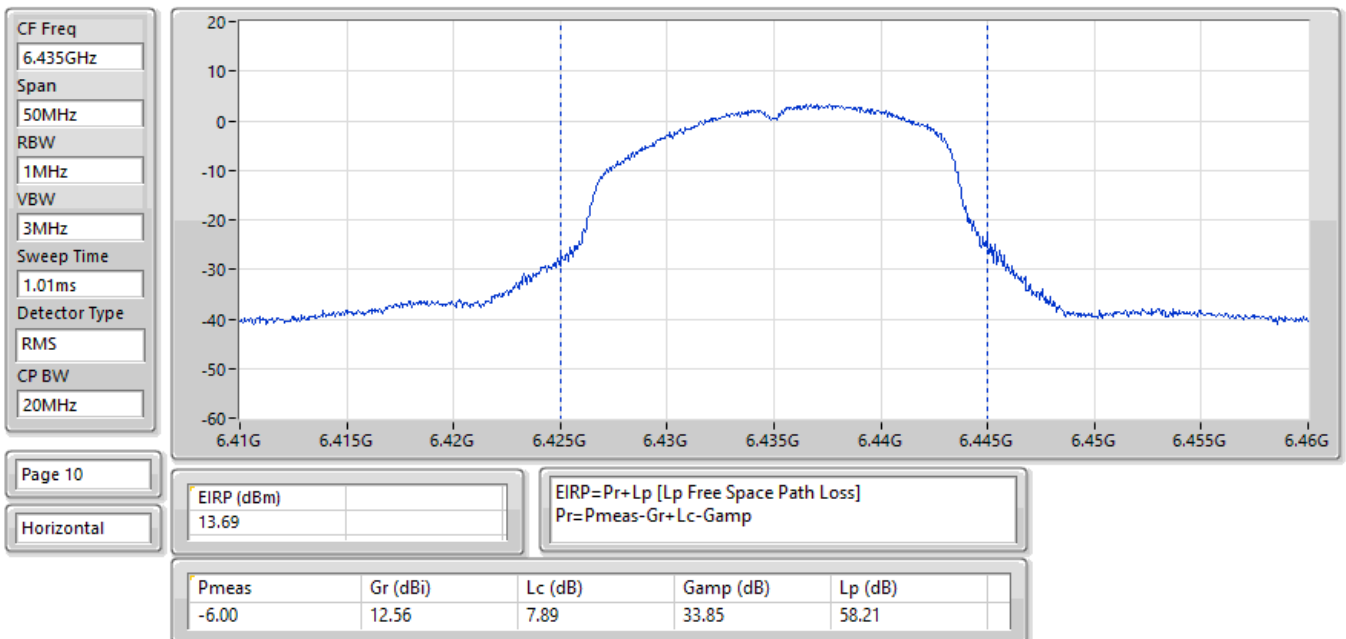


29/07/2026

EIRP:Band:6.4G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6475MHz;TX

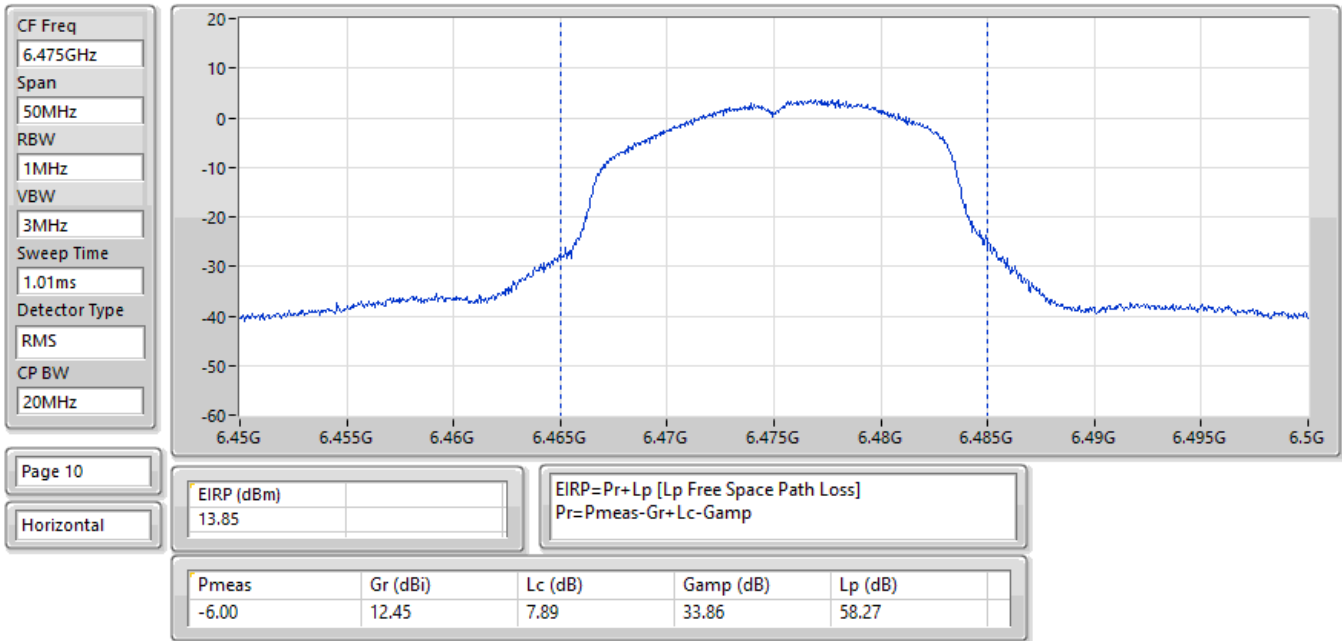


29/07/2026

EIRP:Band:6.4G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6515MHz;TX

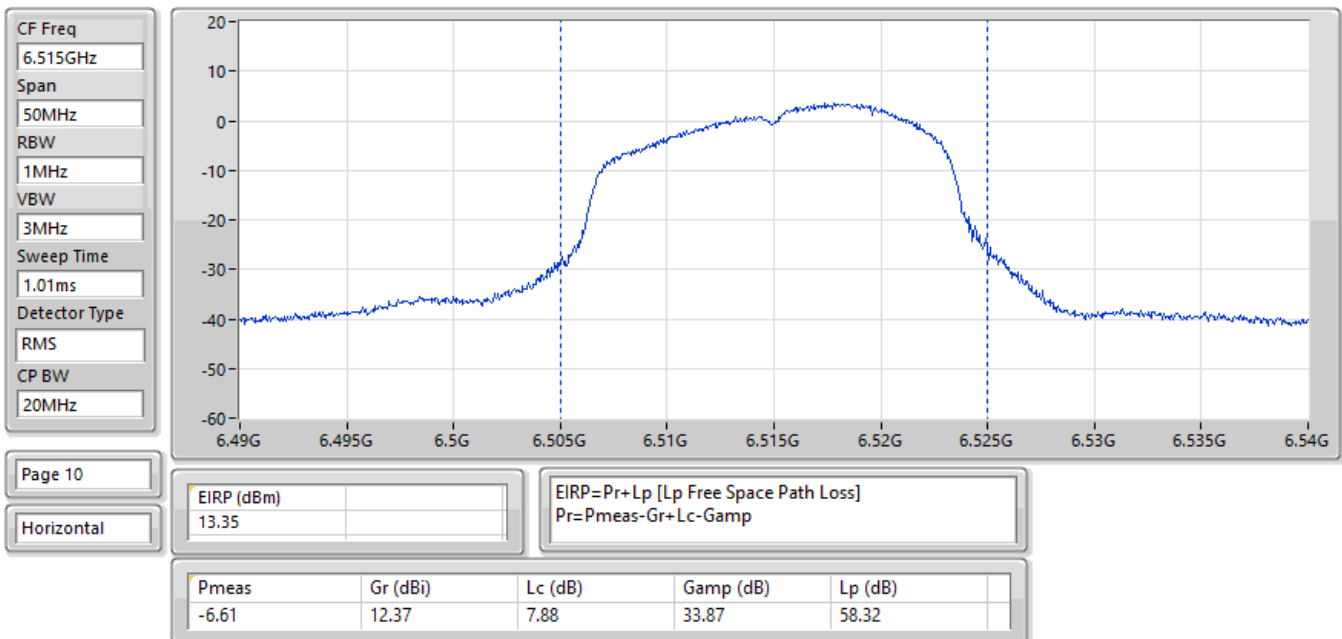


29/07/2026

EIRP;Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6535MHz;TX

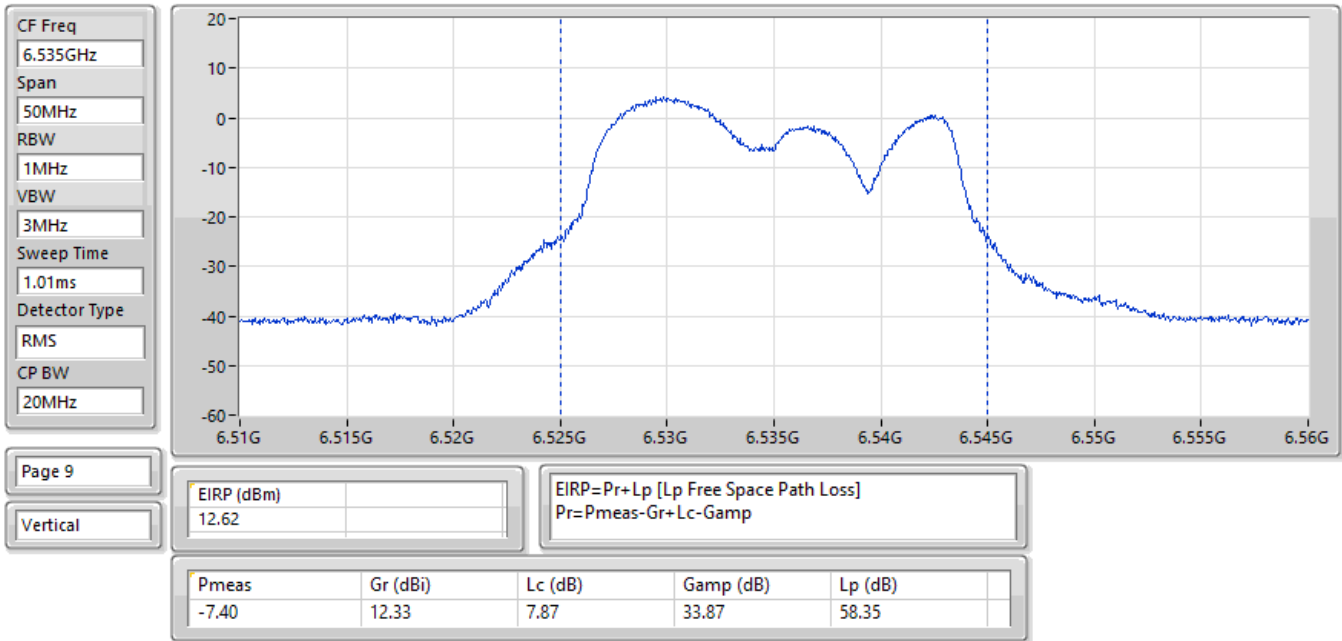


29/07/2026

EIRP;Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6695MHz;TX

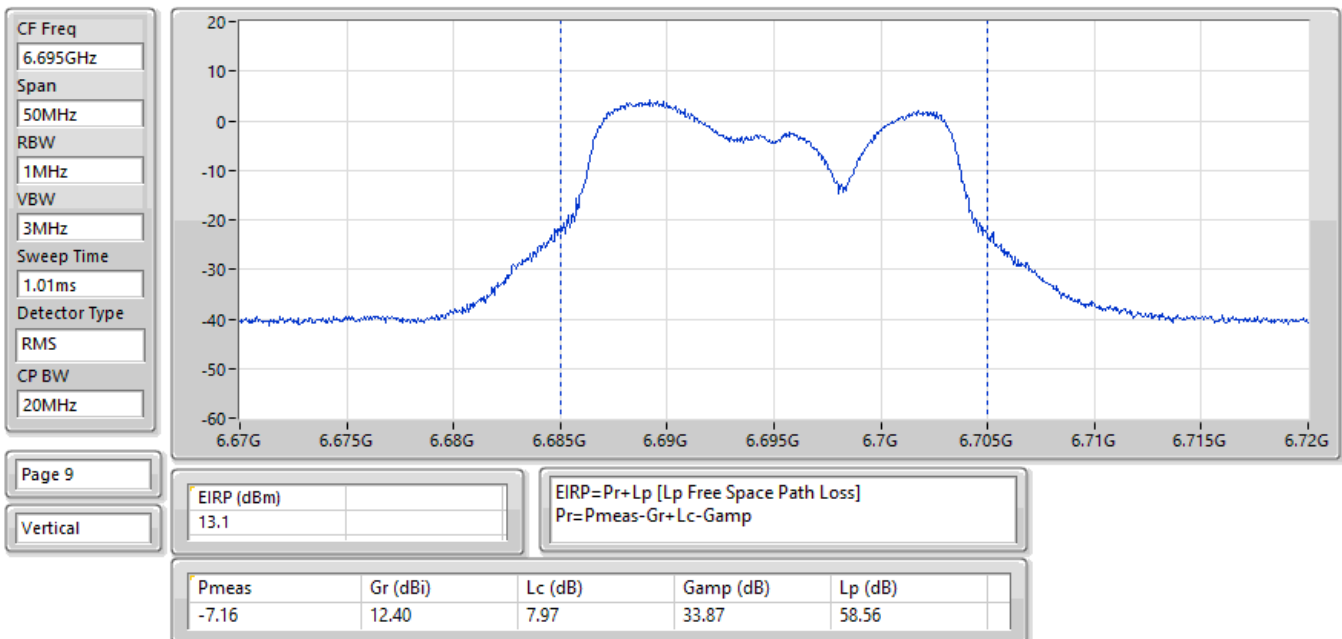


06/08/2026

EIRP:Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6855MHz;TX

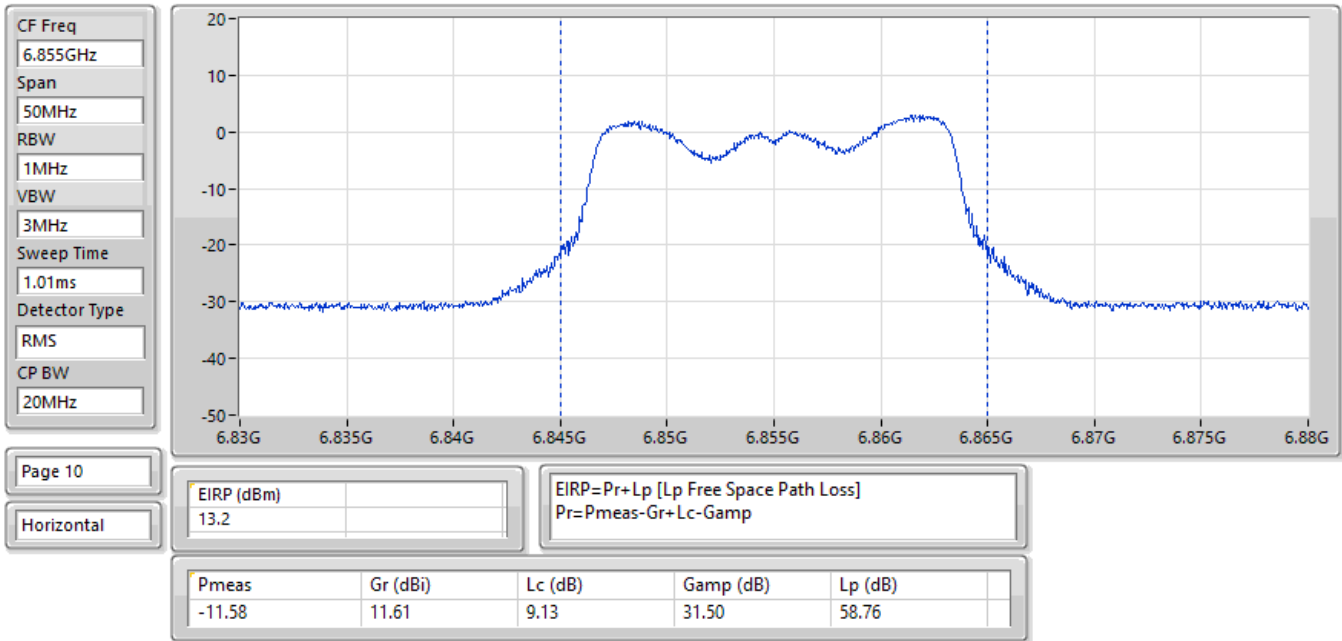


29/07/2026

EIRP:Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6875MHz;TX

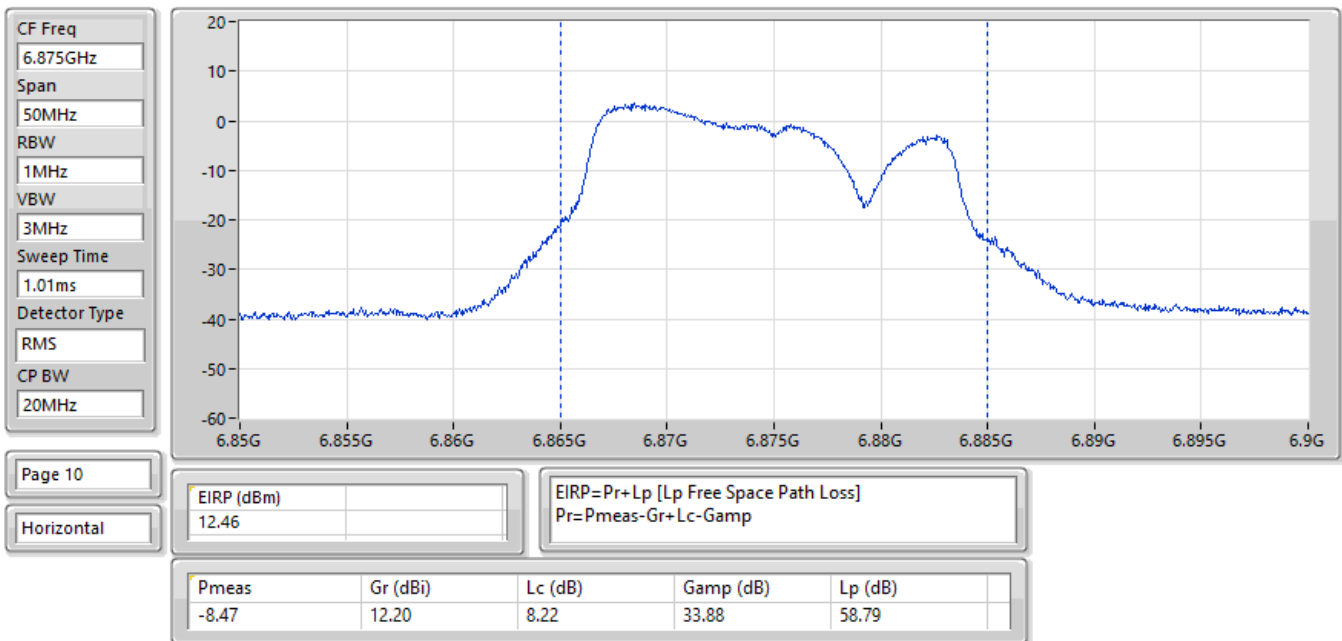


29/07/2026

EIRP;Band:7.0G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:6995MHz;TX

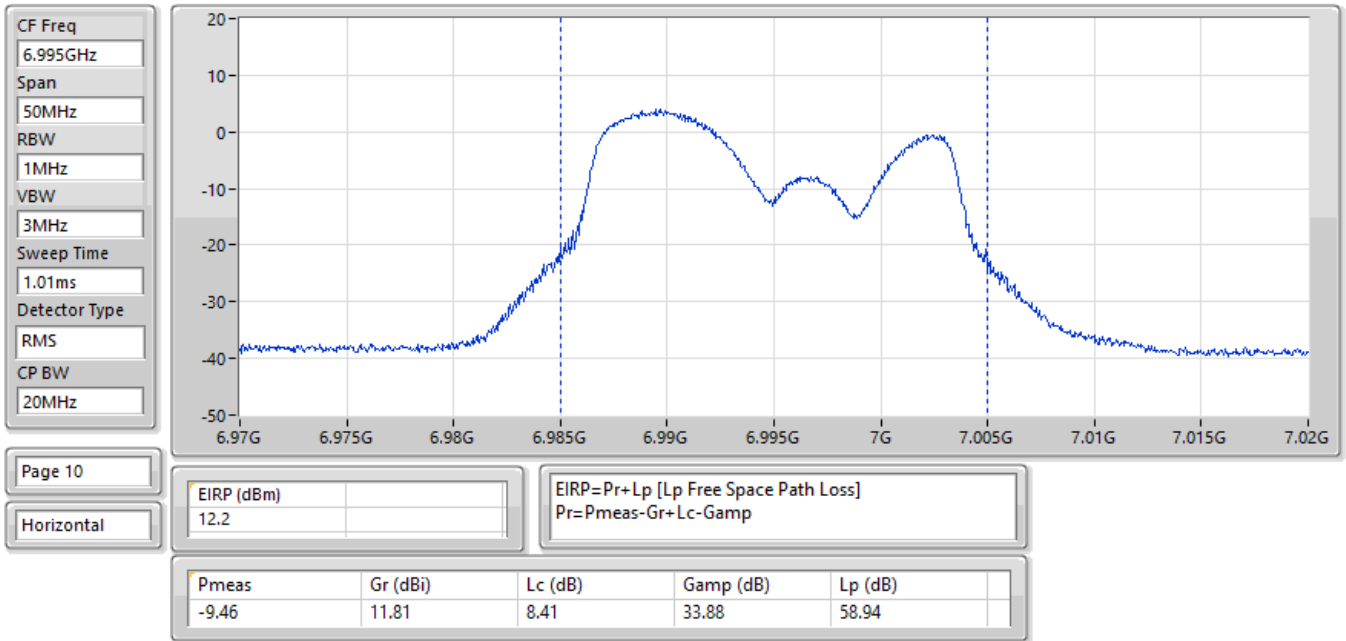


29/07/2026

EIRP;Band:7.0G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:7095MHz;TX

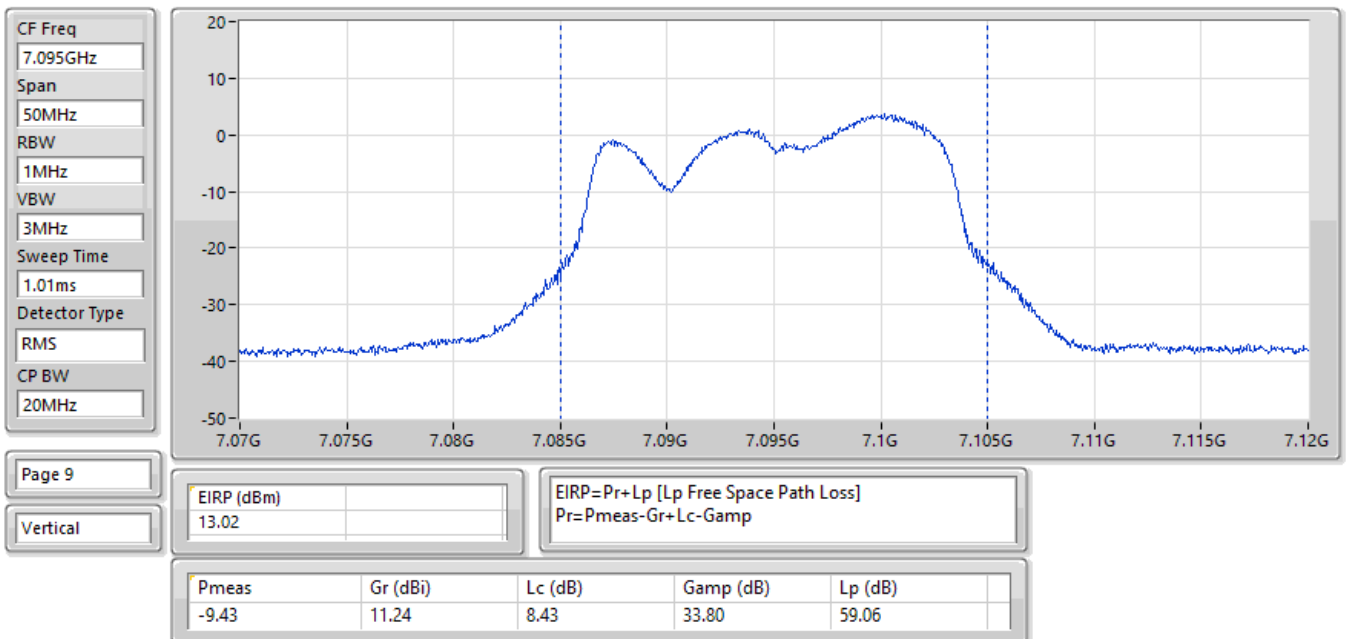


01/08/2026

EIRP:Band:7.0G;11a;BWch:20MHz;Nss:1,(6D);Nant:4;Ch:7115MHz;TX

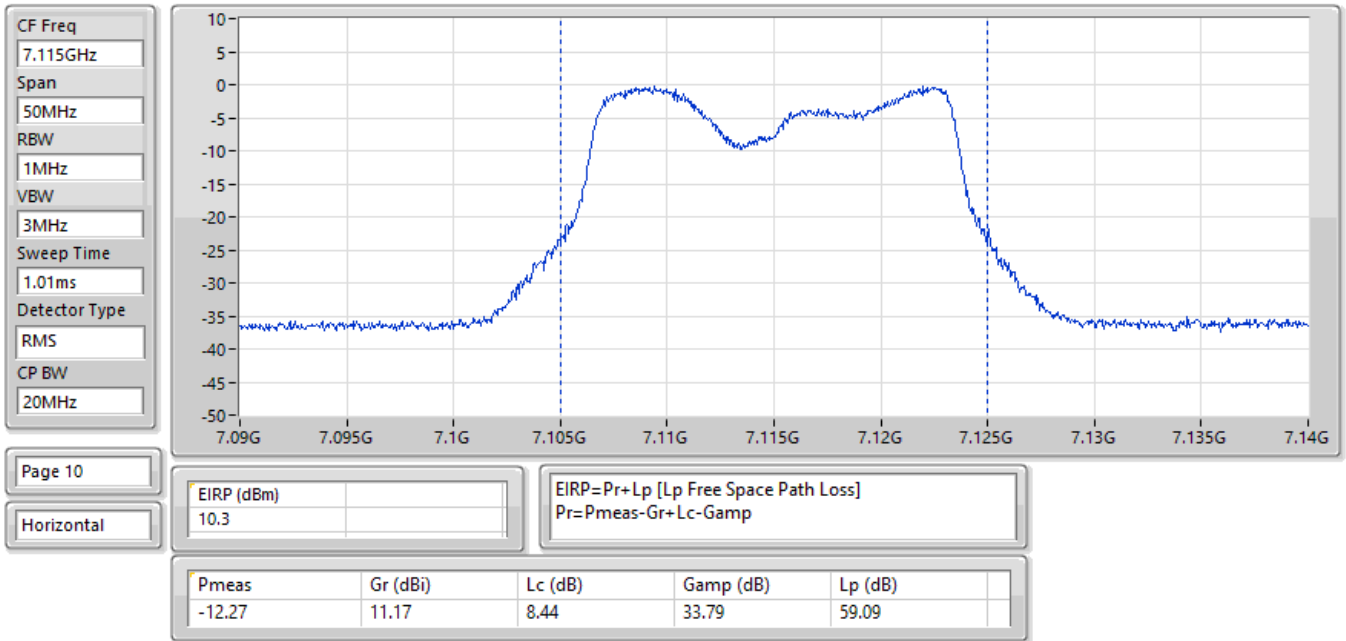


29/07/2026

EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

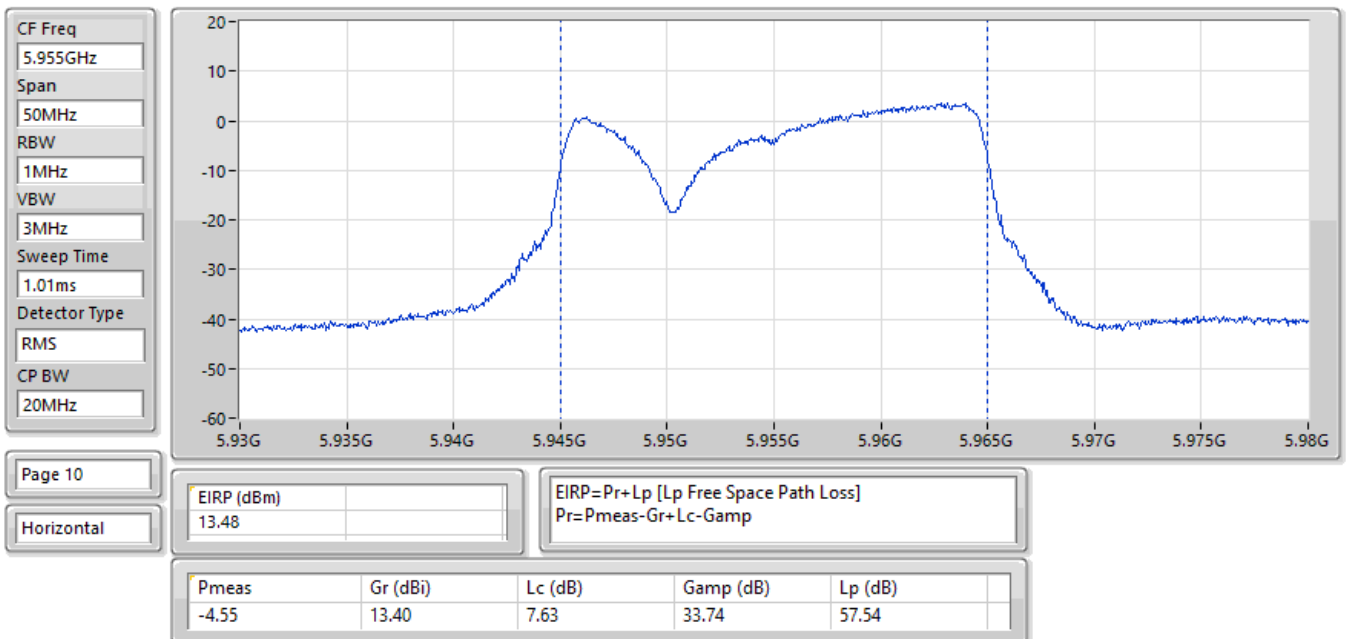


30/07/2026

EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

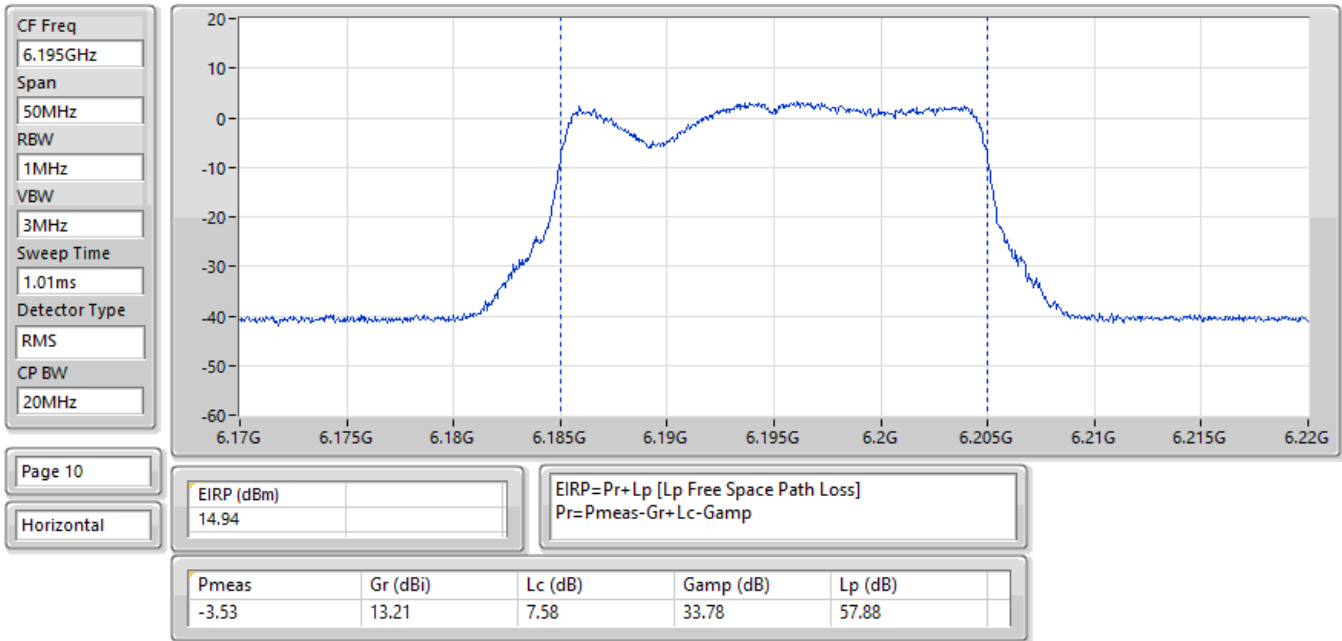


29/07/2026

EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

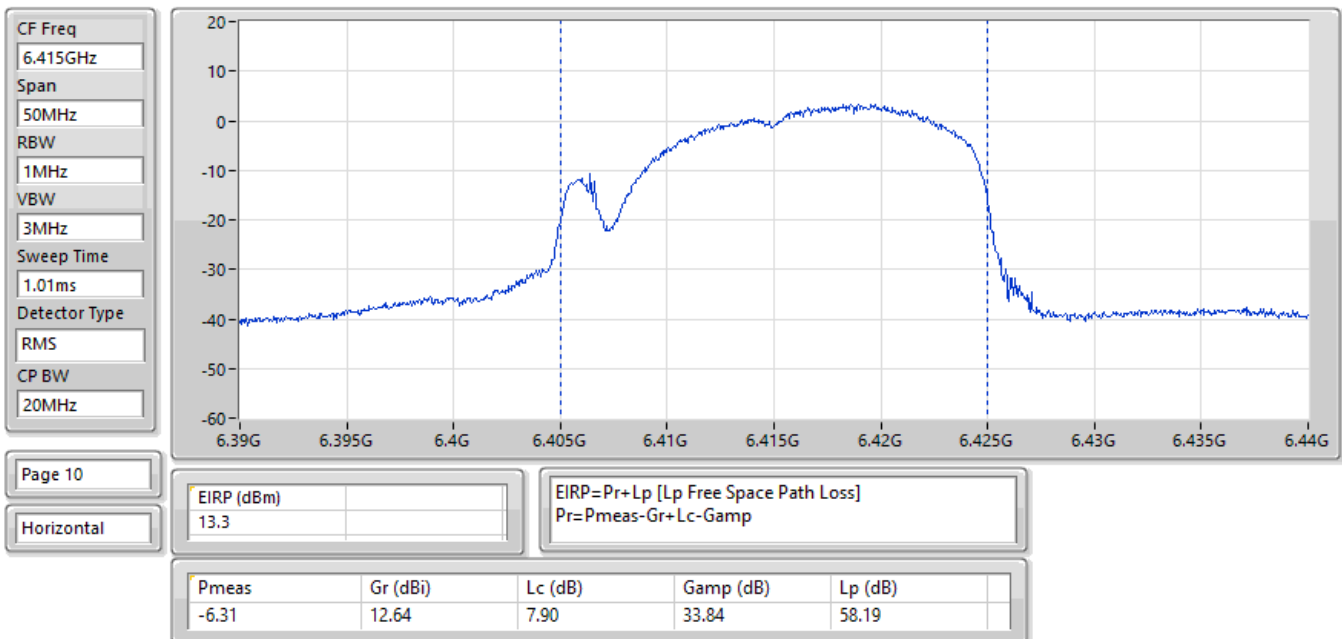


29/07/2026

EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

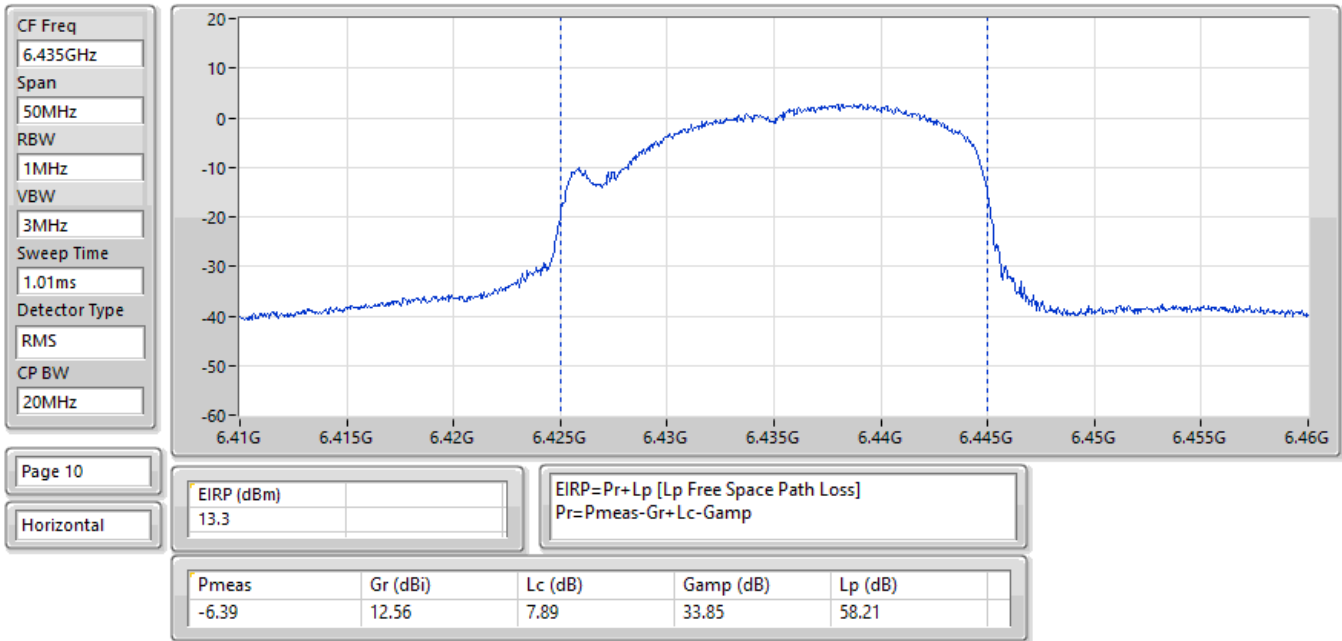


29/07/2026

EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

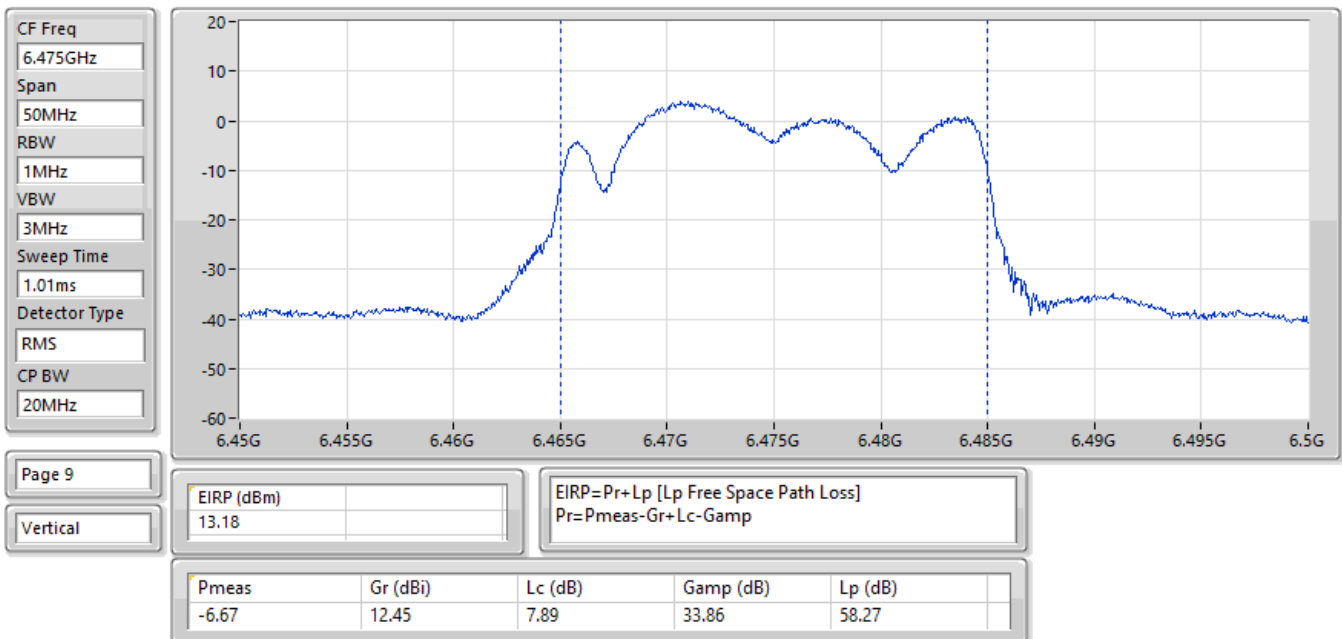


29/07/2026

EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

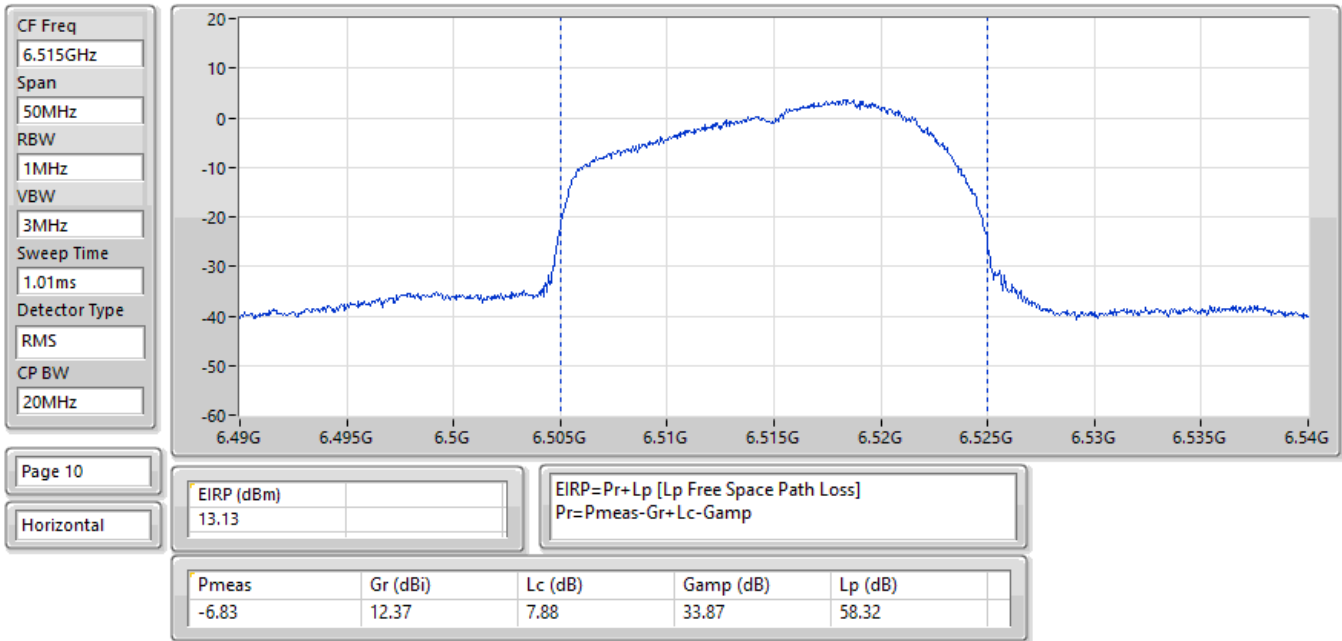


29/07/2026

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

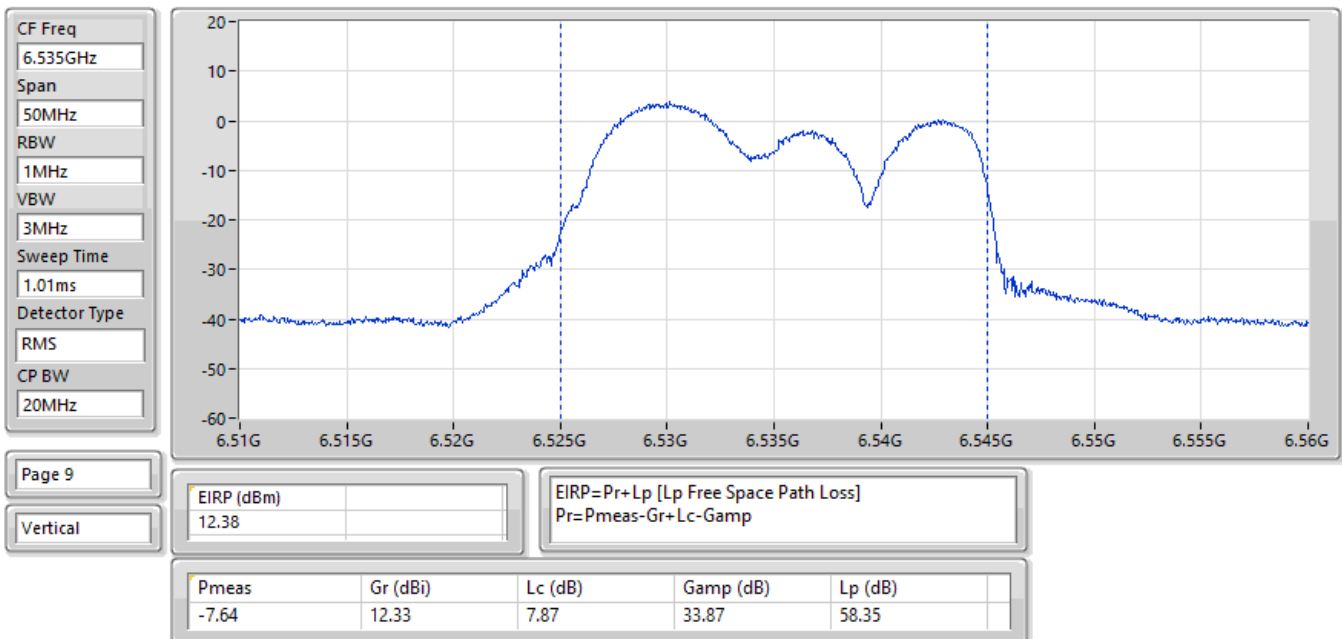


06/08/2026

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

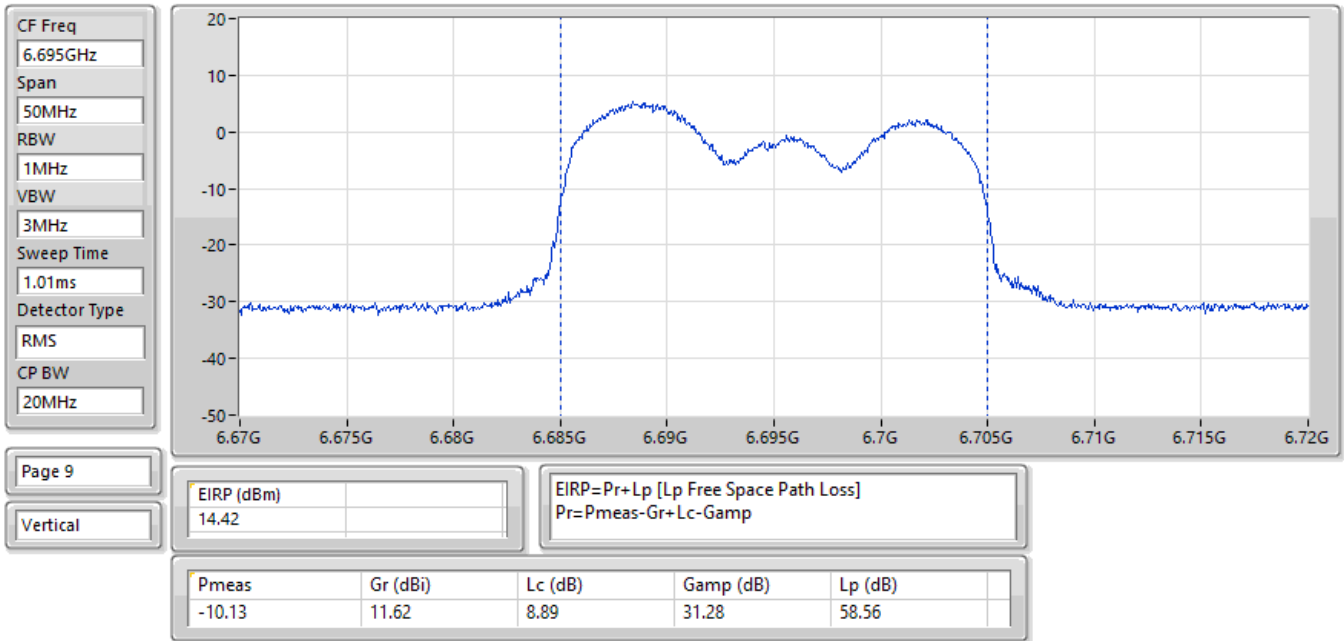


07/08/2026

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

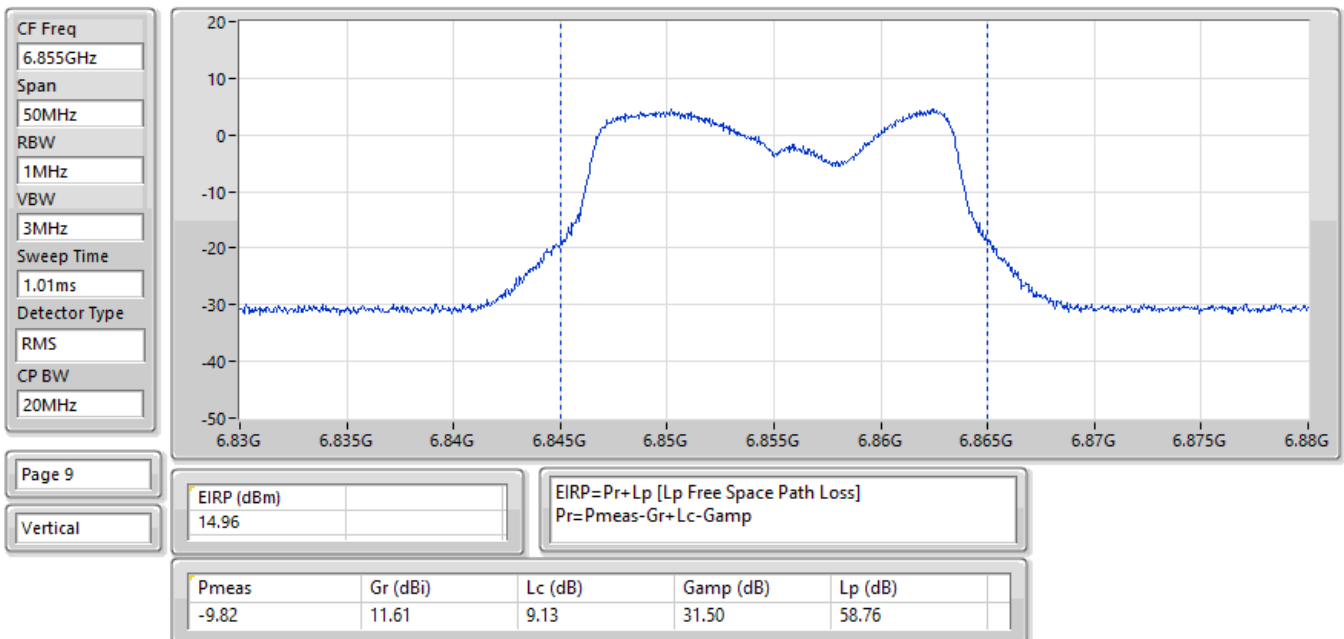


29/07/2026

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

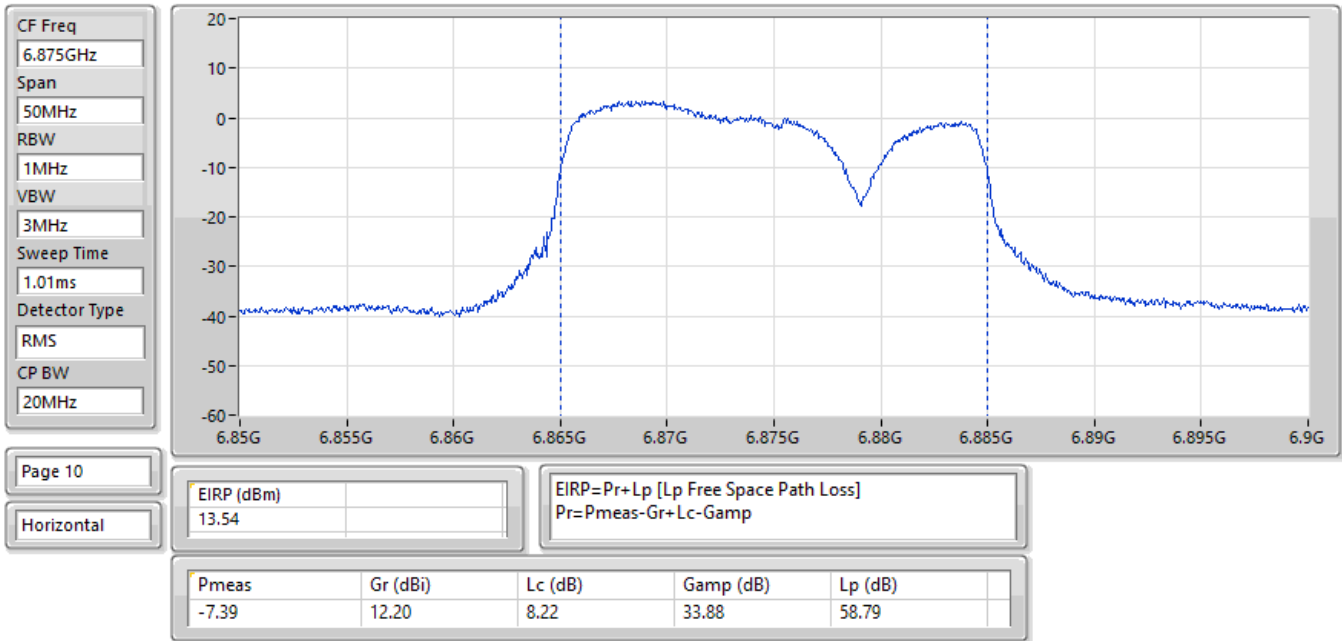


30/07/2026

EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

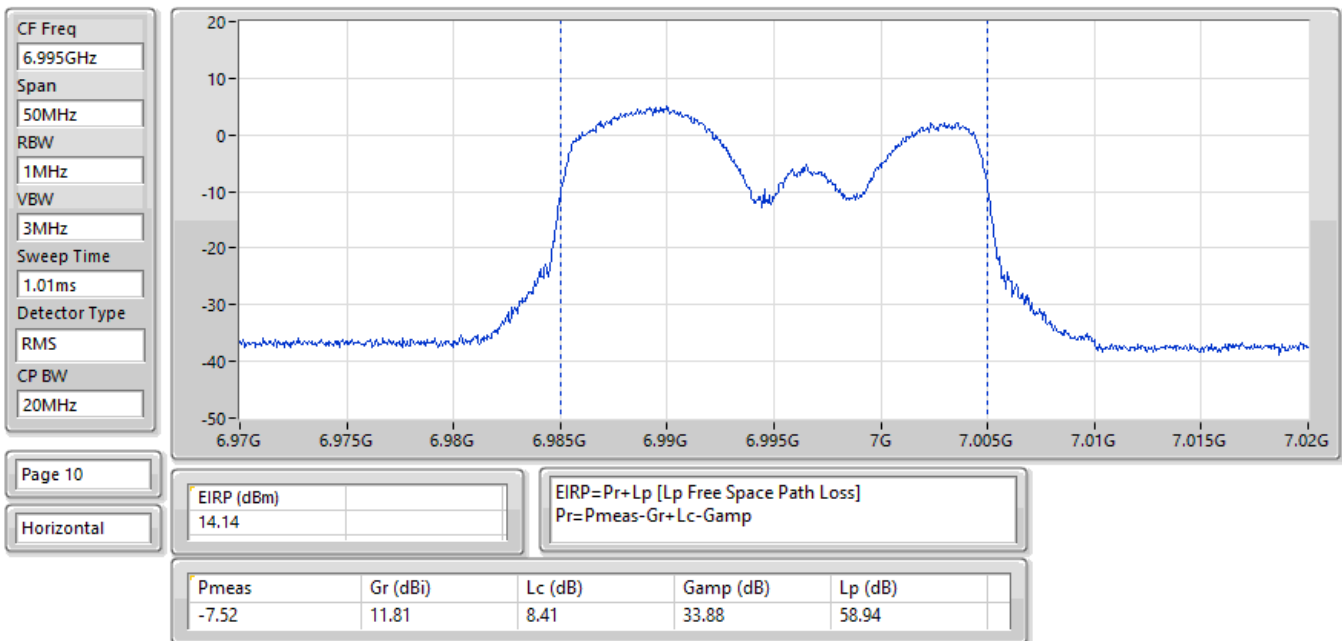


29/07/2026

EIRP;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

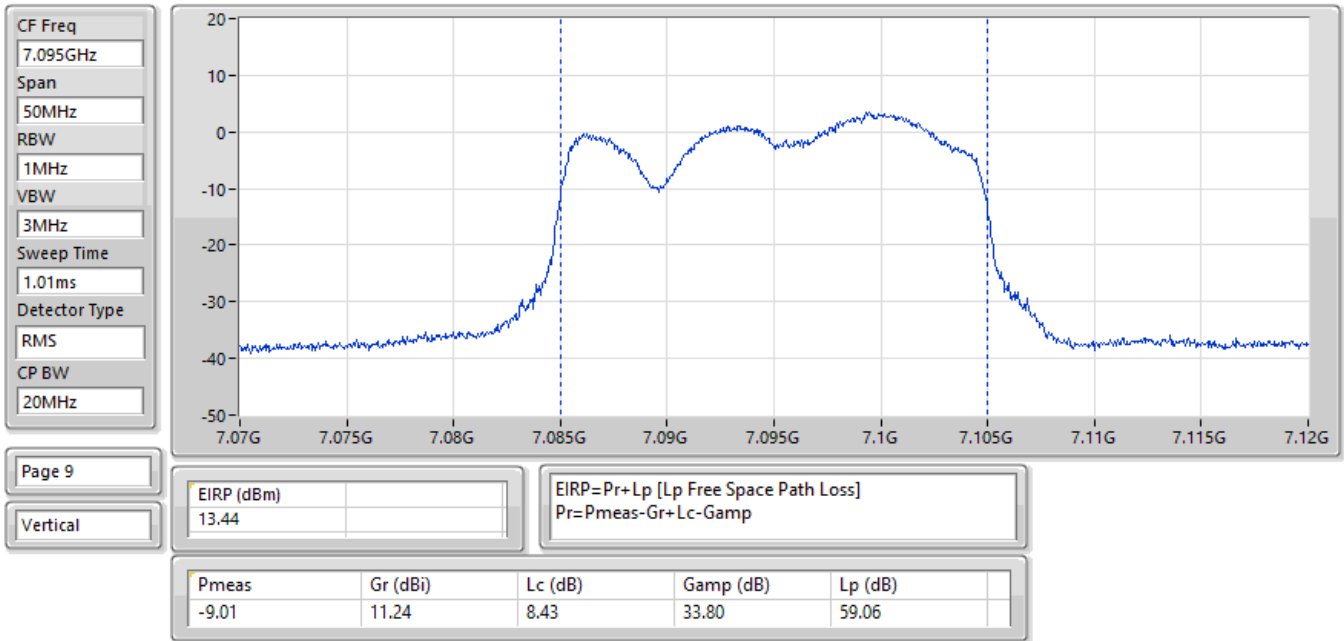


01/08/2026

EIRP;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7115MHz;TX

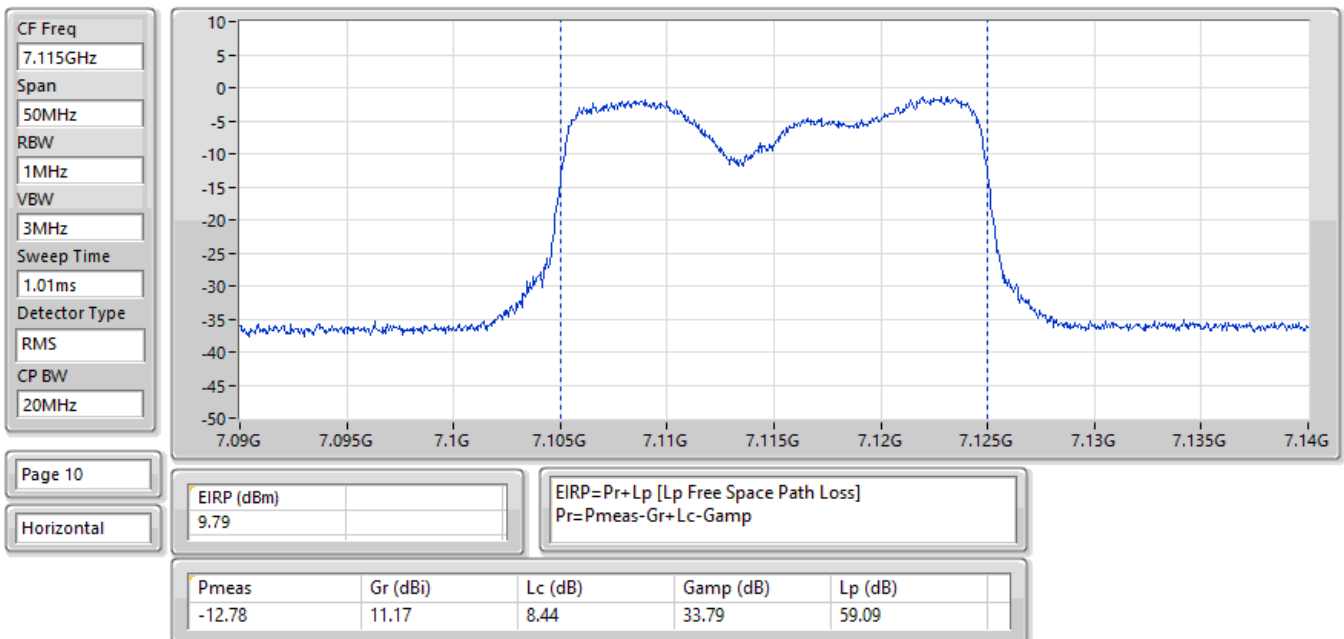


29/07/2026

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

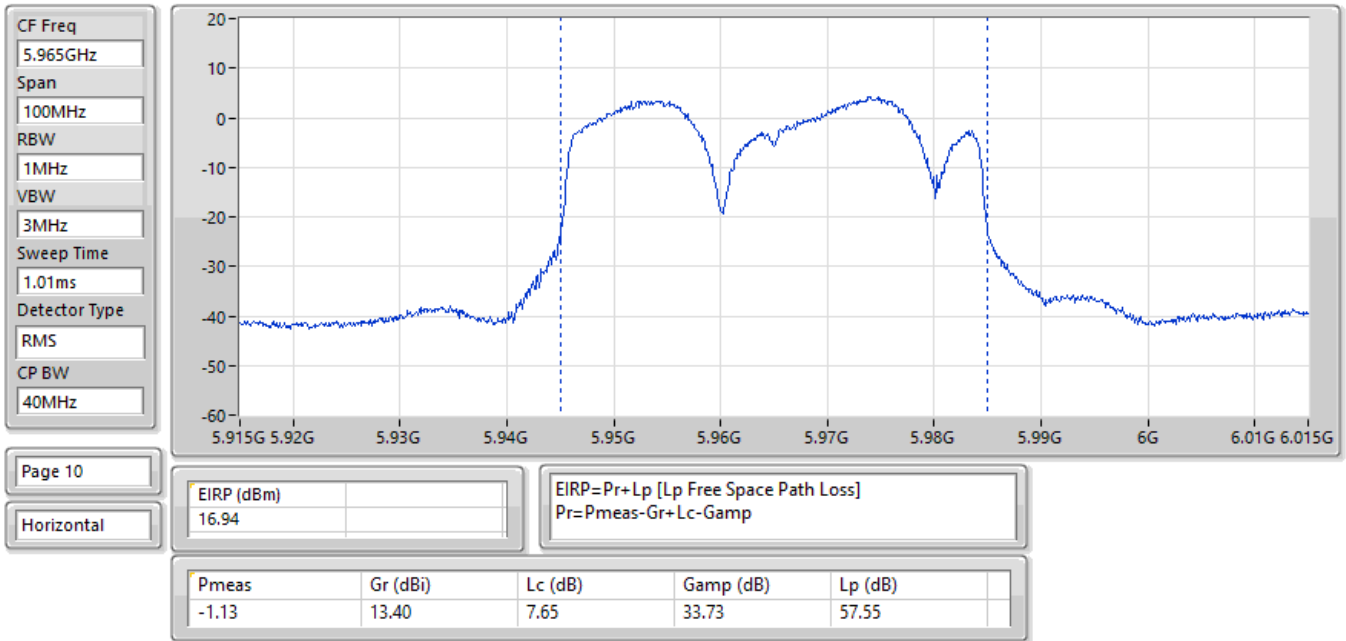


29/07/2026

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

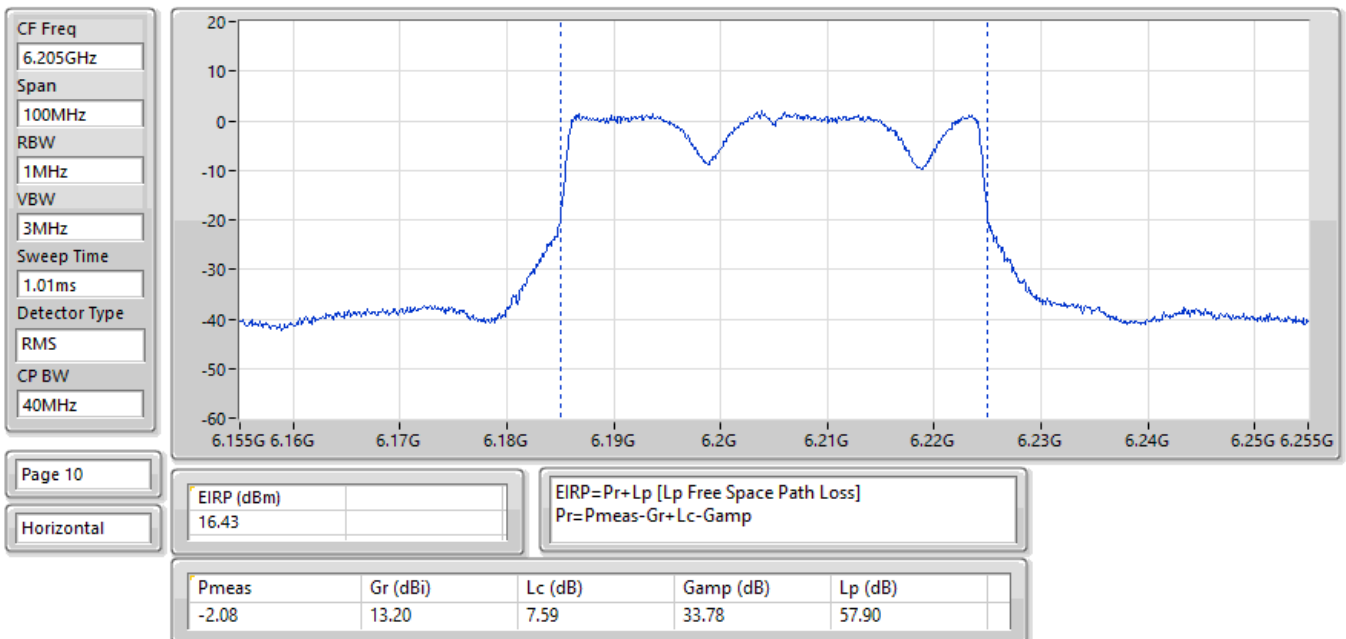


29/07/2026

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

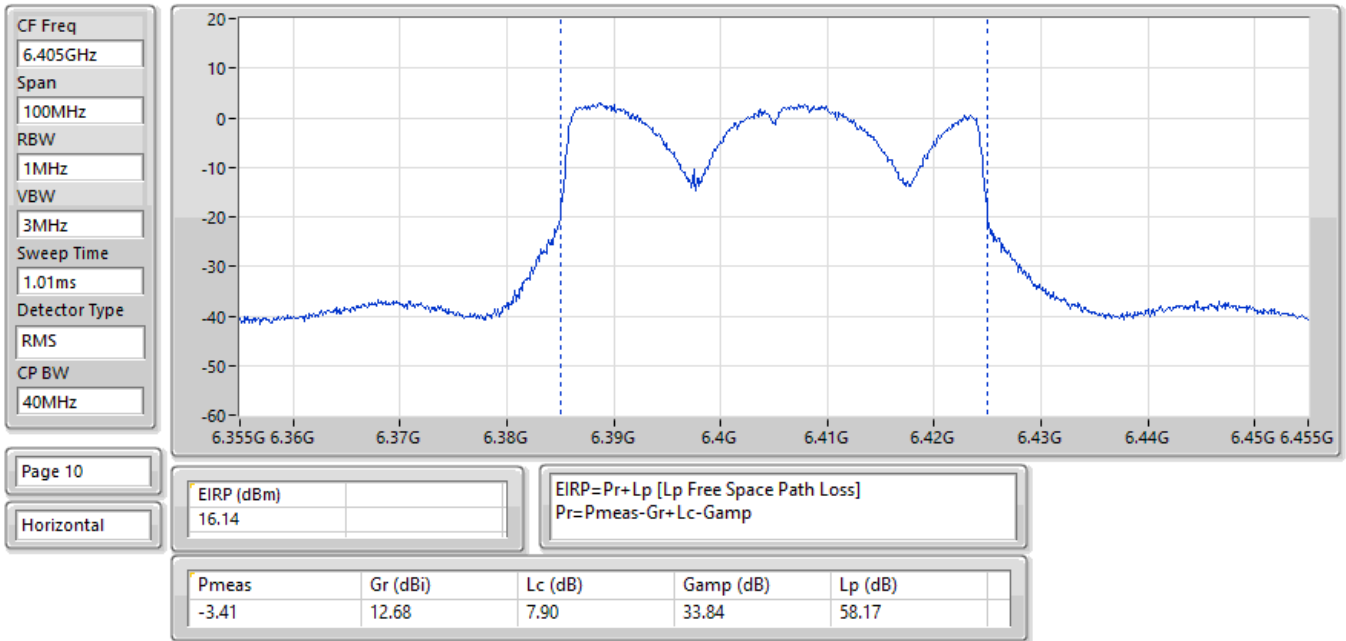


29/07/2026

EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

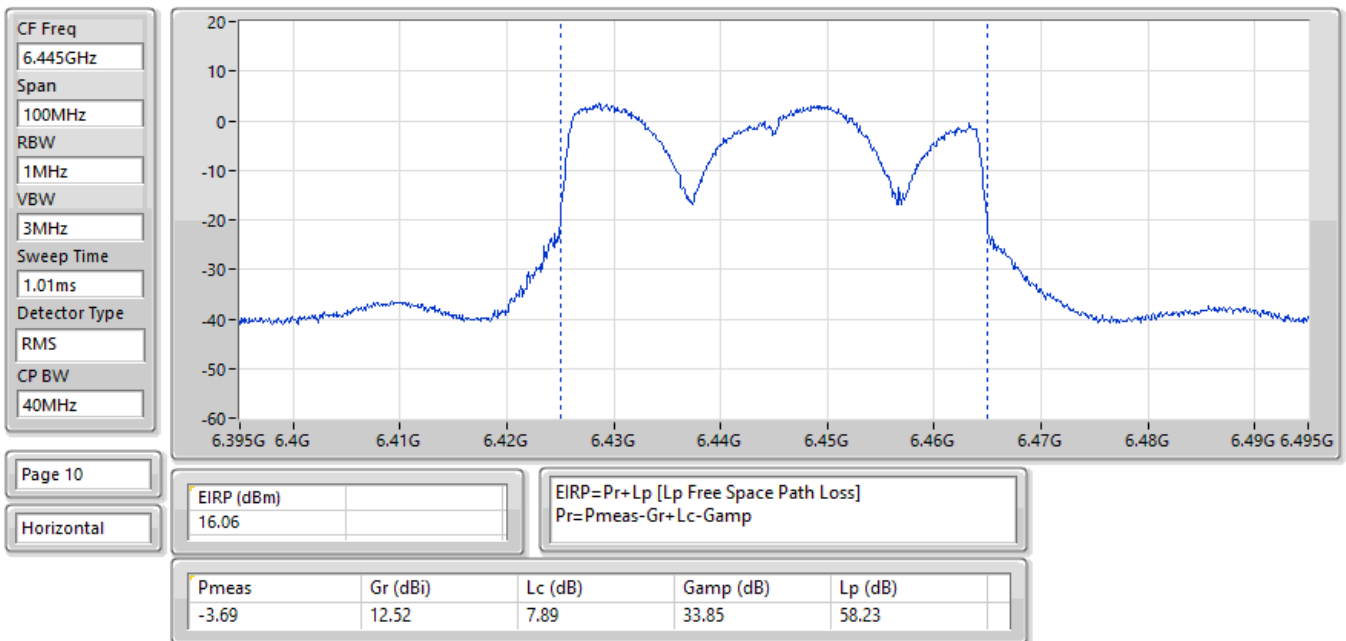


29/07/2026

EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

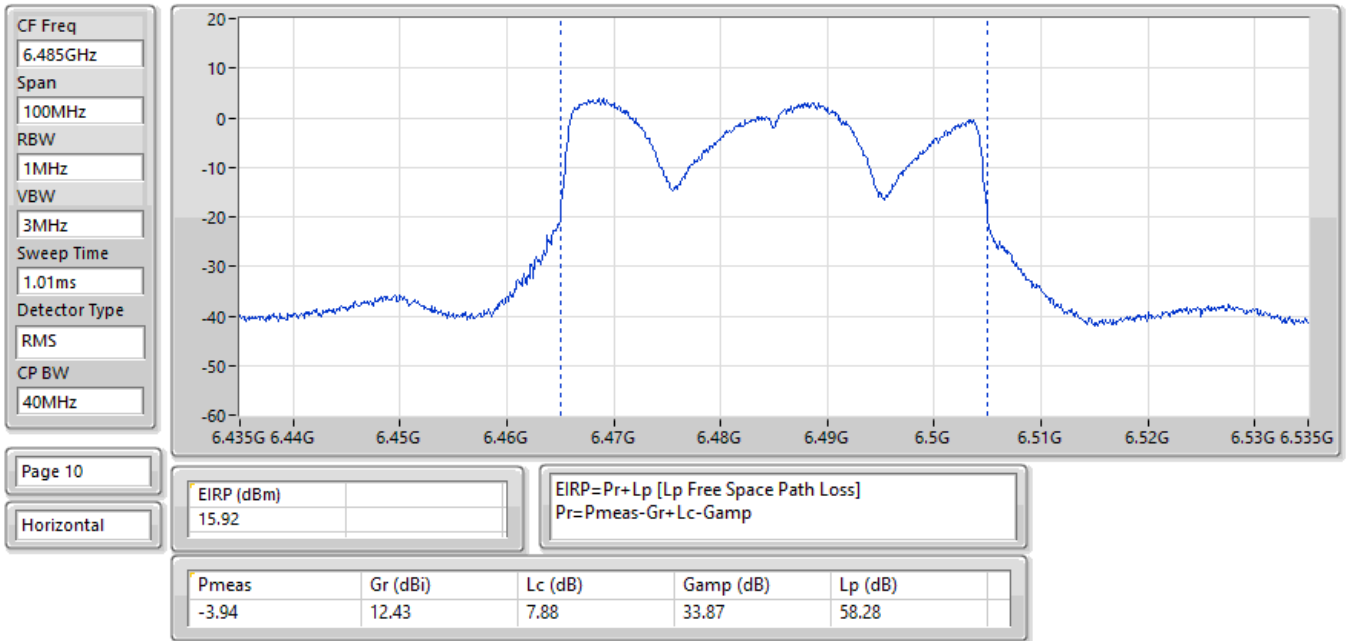


29/07/2026

EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

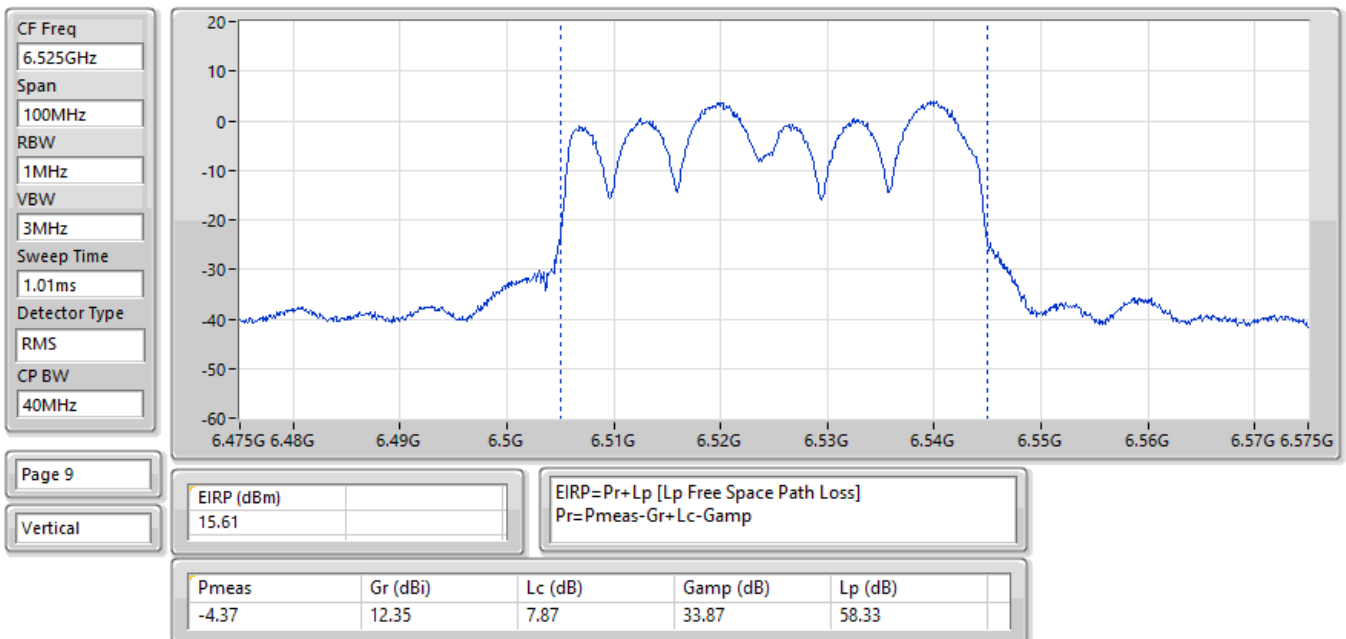


06/08/2026

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

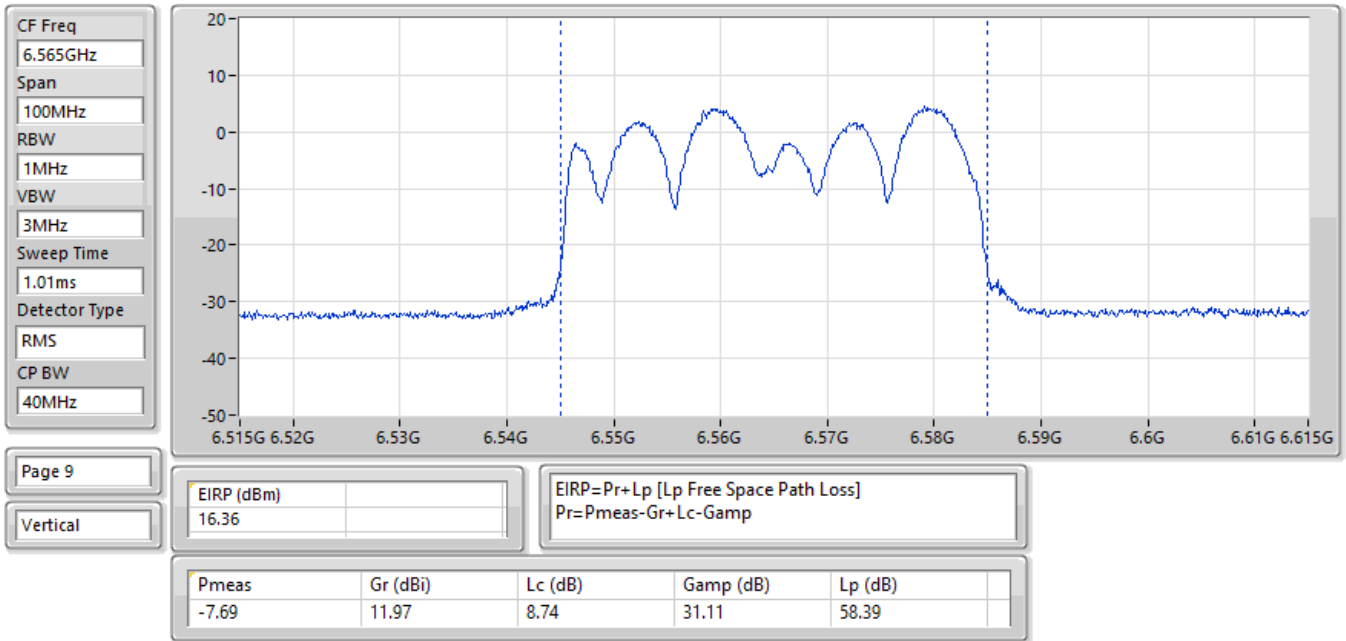


29/07/2026

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

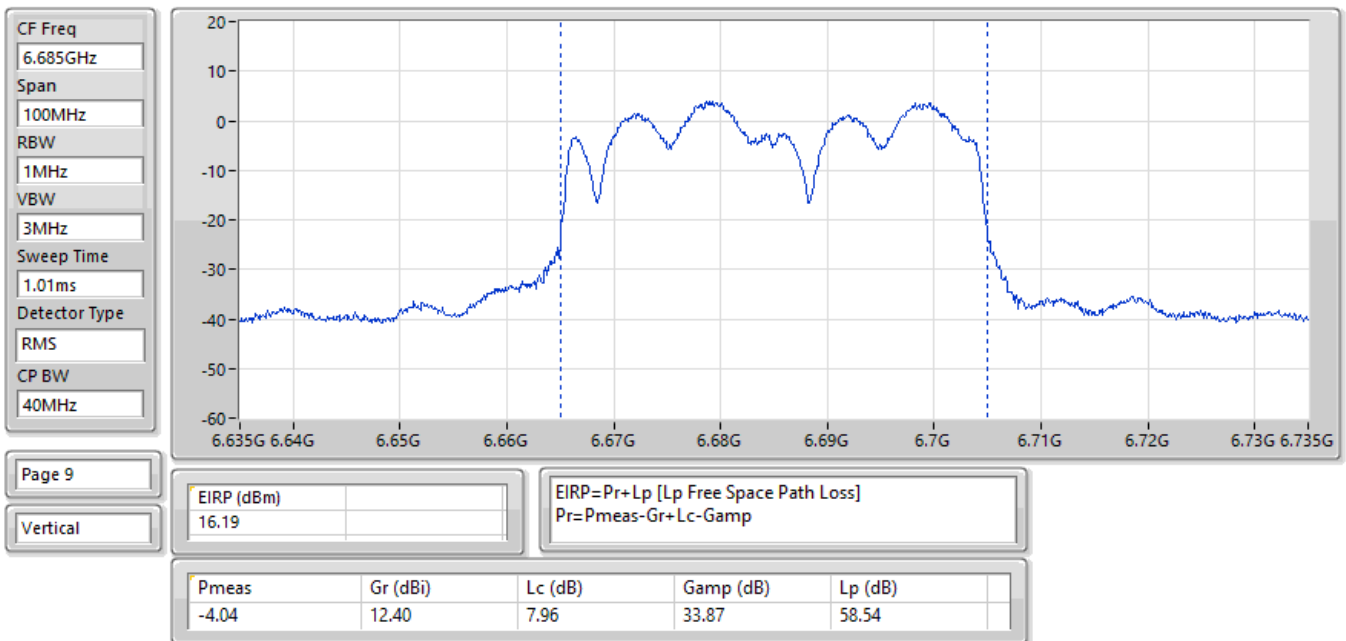


29/07/2026

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

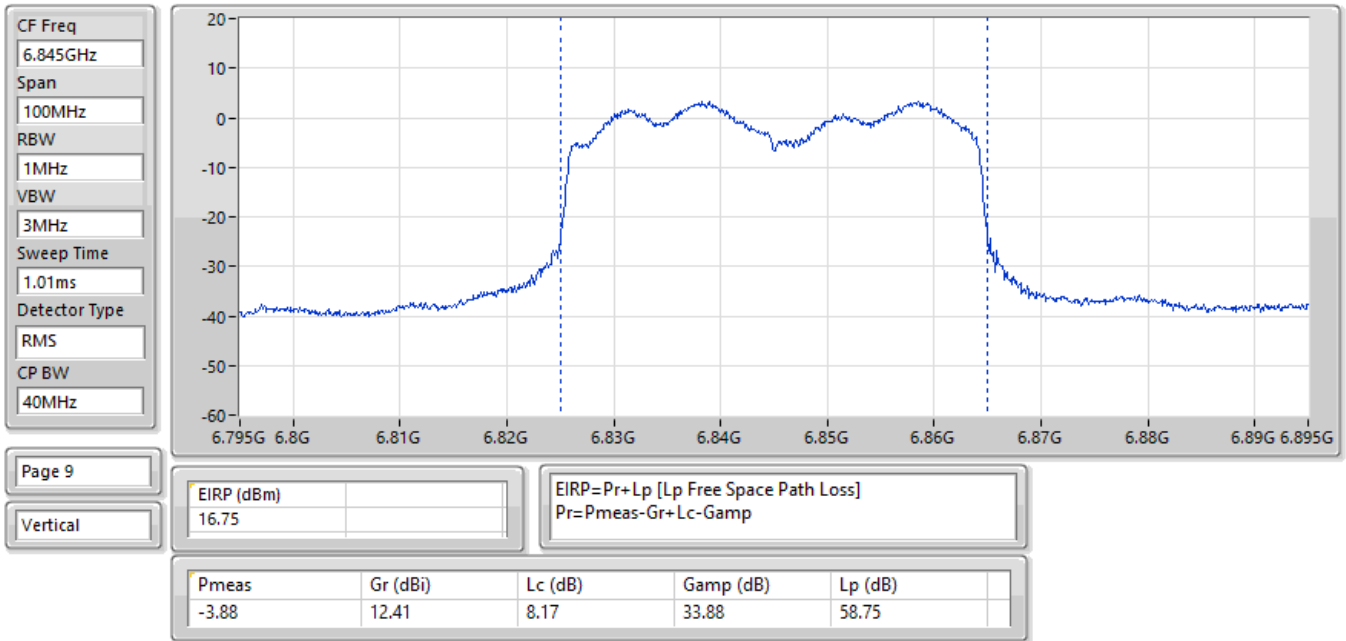


29/07/2026

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

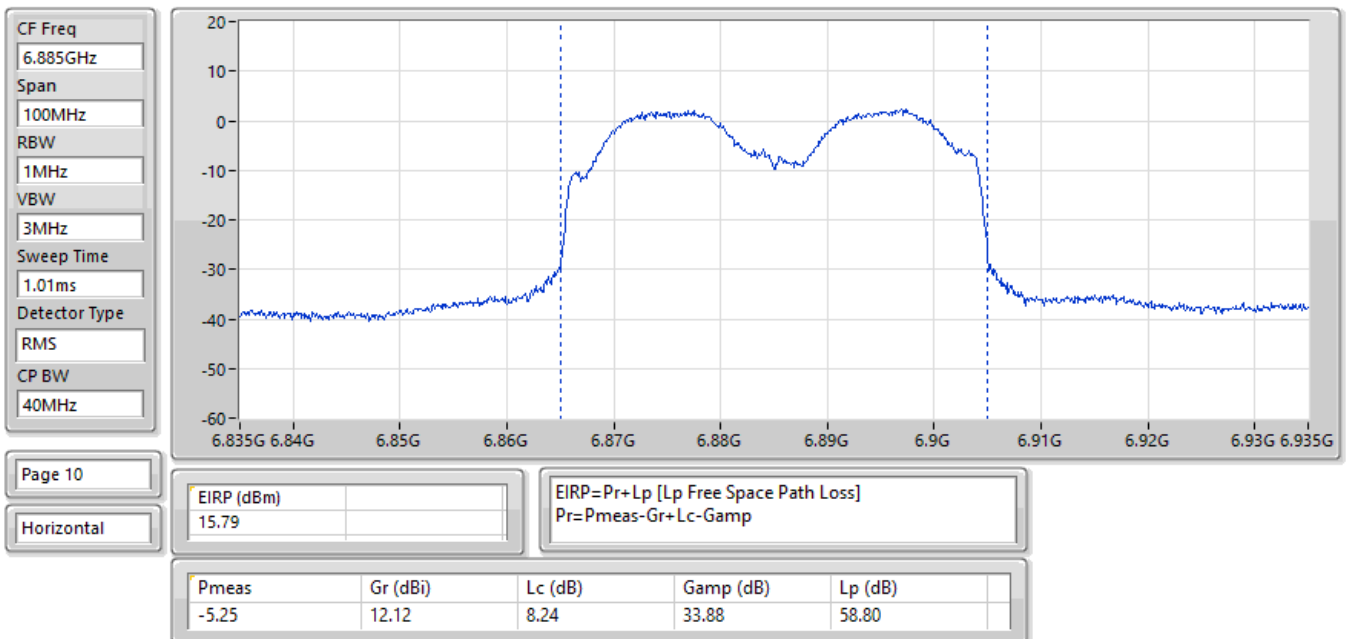


29/07/2026

EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

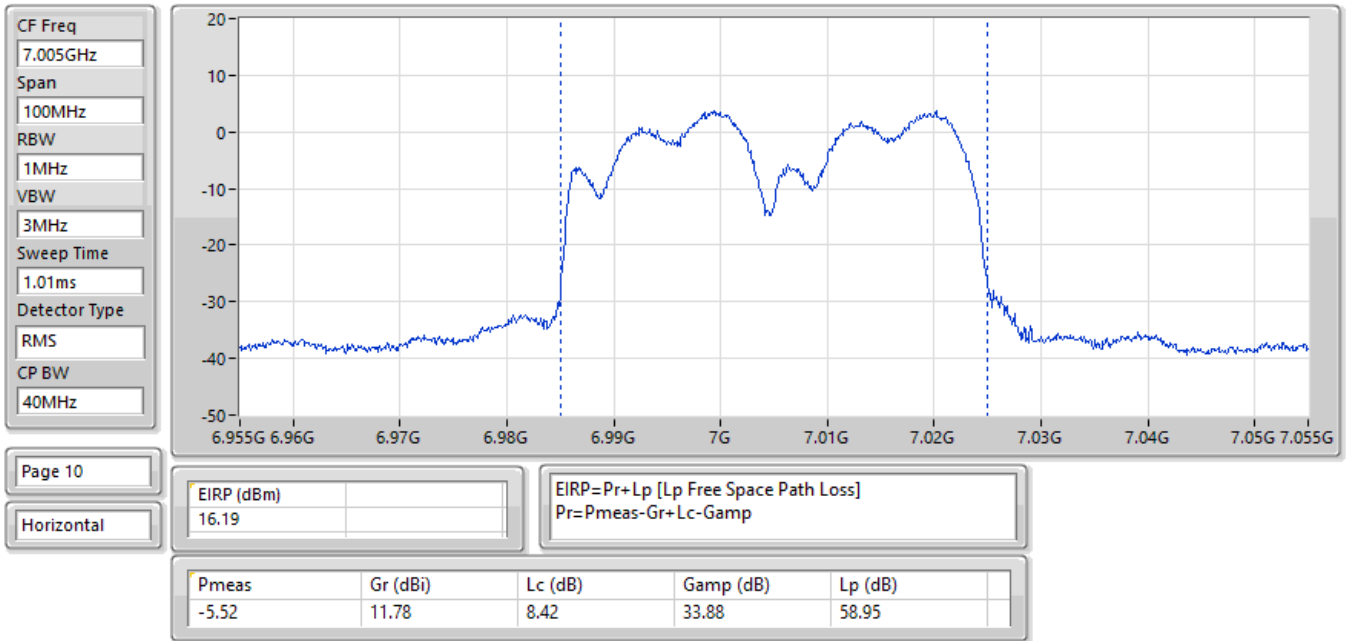


31/07/2026

EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

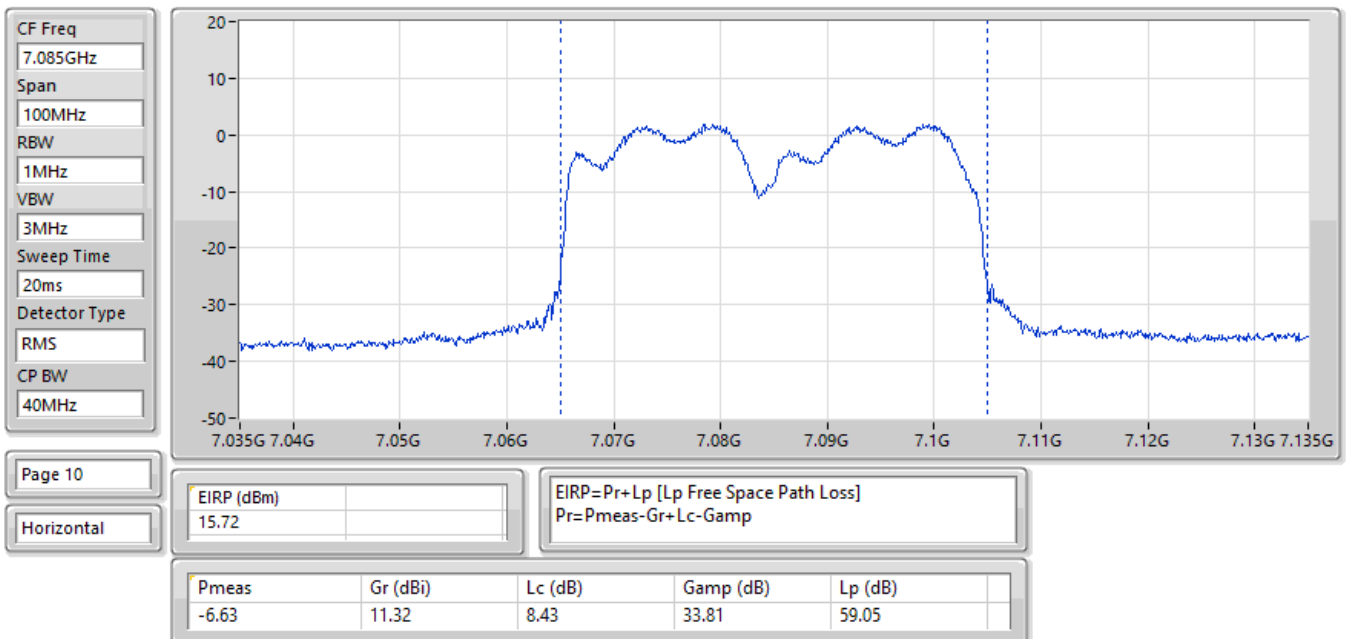

03/08/2026

EIRP;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

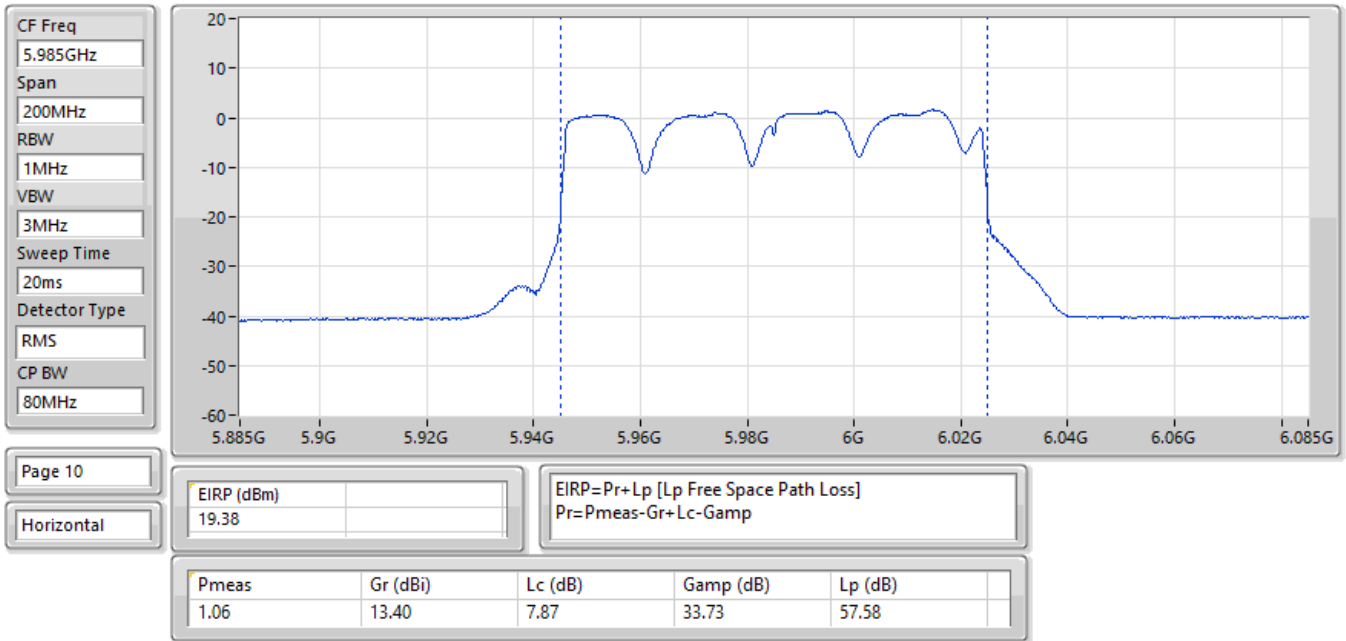

29/07/2026

EIRP;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

