

TEST REPORT

Reference No...... : WTD26X04116317W002
FCC ID..... : 2BXVZ-PTK01
Applicant..... : Shenzhen Wewins Wireless Co.,Ltd
Address..... : 17F., Mid Wing,Yuehai Building, Nanhai Road,Nanshan, Shenzhen, China
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Petmio S1
Model No...... : PTK01
Standards..... : FCC Part 22H, FCC Part 24E, FCC Part 27
Date of Receipt sample..... : 2026-04-28
Date of Test..... : 2026-05-12 to 2026-08-24
Date of Issue..... : 2026-08-24
Test Report Form No...... : WTX_Part 22_ Part 24_ Part 27W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	7
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY	7
1.5 EUT SETUP AND TEST MODE	8
1.6 MEASUREMENT UNCERTAINTY	9
1.7 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	14
3. RF OUTPUT POWER.....	15
3.1 STANDARD APPLICABLE	15
3.2 TEST PROCEDURE	15
3.3 SUMMARY OF TEST RESULTS/PLOTS	16
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	18
4.1 STANDARD APPLICABLE	18
4.2 TEST PROCEDURE	18
4.3 SUMMARY OF TEST RESULTS	18
5. EMISSION BANDWIDTH	19
5.1 STANDARD APPLICABLE	19
5.2 TEST PROCEDURE	19
5.3 SUMMARY OF TEST RESULTS/PLOTS	19
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	20
6.1 STANDARD APPLICABLE	20
6.2 TEST PROCEDURE	20
6.3 SUMMARY OF TEST RESULTS/PLOTS	21
7. SPURIOUS RADIATED EMISSIONS	22
7.1 STANDARD APPLICABLE	22
7.2 TEST PROCEDURE	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	22
8. FREQUENCY STABILITY	103
8.1 STANDARD APPLICABLE	103
8.2 TEST PROCEDURE	103
8.3 SUMMARY OF TEST RESULTS/PLOTS	103
TEST SETUP PHOTOGRAPHS	104
APPENDIX PHOTOGRAPHS	105

Report version

Version No.	Date of issue	Description
Rev.00	2026-08-24	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Petmio S1
Trade Name:	/
Model No.:	PTK01
Adding Model(s):	/
Rated Voltage:	Charging port:DC5V Battery:DC3.85V
Battery:	450mAh
Adapter Model:	/
IMEI:	/
Device Category:	Portable Device
<i>Note: The sample information is provided by the customer.</i>	

Technical Characteristics of EUT:	
4G	
Support Networks:	LTE NB-IOT
Support Band:	FDD-LTE Band 2, 4, 5,12, 13, 17, 25, 26, 66, 85
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz FDD-LTE Band 4: Tx: 1710-1755MHz FDD-LTE Band 5: Tx: 824-849MHz FDD-LTE Band 12: Tx: 699-716MHz FDD-LTE Band 13: Tx: 777-787MHz FDD-LTE Band 17: Tx: 704-716MHz FDD-LTE Band 25: Tx: 1850-1915MHz FDD-LTE Band 26: Tx: 824-849MHz FDD-LTE Band 66: Tx:1710-1780MHz FDD-LTE Band 85: Tx:698-716MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz FDD-LTE Band 4: Rx: 2110-2155MHz FDD-LTE Band 5: Rx: 869-894MHz FDD-LTE Band 12: Rx: 729-746MHz FDD-LTE Band 13: Rx: 746-756MHz FDD-LTE Band 17: Rx: 734-746MHz FDD-LTE Band 25: Rx: 1930-1995MHz FDD-LTE Band 26: Rx: 869-894MHz, FDD-LTE Band 66: Rx: 2110-2200MHz FDD-LTE Band 85: Rx: 728-746MHz
Conduct Power:	FDD-LTE Band 2: 22.63dBm FDD-LTE Band 4: 22.54dBm FDD-LTE Band 5: 22.44dBm FDD-LTE Band 12: 22.16dBm FDD-LTE Band 13: 22.27dBm FDD-LTE Band 17: 22.16dBm FDD-LTE Band 25: 22.63dBm FDD-LTE Band 26: 22.44dBm, FDD-LTE Band 66: 22.54dBm FDD-LTE Band 85: 22.16dBm
ERP/EIRP:	FDD-LTE Band 2: 23.13dBm FDD-LTE Band 4: 23.04dBm FDD-LTE Band 5: 17.29dBm FDD-LTE Band 12: 14.01dBm FDD-LTE Band 13: 16.12dBm FDD-LTE Band 17: 14.01dBm FDD-LTE Band 25: 23.13dBm FDD-LTE Band 26: 17.29dBm,

	FDD-LTE Band 66: 23.04dBm FDD-LTE Band 85: 14.01dBm
Type of Emission:	FDD-LTE Band 2: 127KG7D, 188KG7D FDD-LTE Band 4: 126KG7D, 188KG7D FDD-LTE Band 5: 126KG7D, 188KG7D FDD-LTE Band 12: 125KG7D, 189KG7D FDD-LTE Band 13: 55KG7D, 189KG7D FDD-LTE Band 17: 127KG7D, 188KG7D FDD-LTE Band 25: 127KG7D, 188KG7D FDD-LTE Band 26: 126KG7D, 188KG7D FDD-LTE Band 66: 126KG7D, 188KG7D FDD-LTE Band 85: 125KG7D, 189KG7D
Type of Modulation:	BPSK,QPSK
Support sub-carrier spacing	3.75kHz, 15kHz
Antenna Type:	PIFA Antenna
Antenna Gain:	FDD-LTE Band 2: 0.5dBi, FDD-LTE Band 4: -1.2dBi, FDD-LTE Band 5: -3dBi, FDD-LTE Band 12: -6dBi, FDD-LTE Band 13: -4dBi, FDD-LTE Band 17: -6dBi FDD-LTE Band 25: 0.5dBi, FDD-LTE Band 26:-3.0dBi, FDD-LTE Band 66: 0.5dBi, FDD-LTE Band 85: -6dBi
<i>Note: 1: The Antenna Gain is provided by the customer and can affect the validity of results.</i> <i>2: The data provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Public Mobile Services.

FCC Rules Part 24: Personal Communications Services.

FCC Rules Part 27: Miscellaneous Wireless Communications Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

KDB 971168 D01 Power Measurement License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE Band 2	Low, Middle, High Channels
TM2	FDD-LTE Band 4	Low, Middle, High Channels
TM3	FDD-LTE Band 5	Low, Middle, High Channels
TM4	FDD-LTE Band 12	Low, Middle, High Channels
TM5	FDD-LTE Band 13	Low, Middle, High Channels
TM6	FDD-LTE Band 17	Low, Middle, High Channels
TM7	FDD-LTE Band 25	Low, Middle, High Channels
TM8	FDD-LTE Band 26	Low, Middle, High Channels
TM9	FDD-LTE Band 66	Low, Middle, High Channels
TM10	FDD-LTE Band 85	Low, Middle, High Channels

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	0.47	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	MDY-11-EX	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.57\text{dB}$
Occupied Bandwidth	Conducted	$\pm 0.015\text{MHz}$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Transmitter Spurious Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Transmitter Spurious Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

1.7 Test Equipment List and Details

Internal No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041 A1002	Communication Tester	Rohde & Schwarz	CMW500	1201.0002 k50-14865 0-FB	2026-03-25	2027-03-24
WTXE1022 A1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2026-02-06	2027-02-05
WTXE1104 A1001	MXG Vector Signal Generator	Agilent	N5182A	MY474201 08	2026-02-06	2027-02-05
WTXE1104 A1002	DC Power Supply	Agilent	E3634A	MY400092 94	2026-02-06	2027-02-05
WTXE1104 A1003	EXG Analog Signal Generator	KEYSIGHT	N5173B	MY612528 92	2026-02-06	2027-02-05
WTXE1104 A1004	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101559	2026-02-06	2027-02-05
WTXE1104 A1005-2	Band Reject Filter Group	Tonscend	JS0806-F	23A806F0 658	2026-02-06	2027-02-05
WTXW1105 A1136	RF ATTENUATOR	FEIYANG	N-JK	/	2026-02-06	2027-02-05
WTXE1003 A1-005	Coaxial Cable	/	0M4RFC	/	2026-02-23	2027-02-22
☐ Chamber A: Below 1GHz						
WTXE1005 A1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001 A1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1007 A1002	Amplifier	HP	8447F	2805A034 75	2026-02-05	2027-02-04
WTXE1010 A1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1010 A1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
WTXE1104 A1032-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1032-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1032-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz						
WTXE1005	Spectrum	Rohde &	FSP30	836079/03	2026-02-05	2027-02-04

A1003	Analyzer	Schwarz		5		
WTXE1001 A1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1065 A1001	Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
WTXE1010 A1005	Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04
WTXE1010 A1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003 A1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1005 A1006	Spectrum Analyzer	Rohde & Schwarz	FSP40	1164.4391 K38Ser. 100368	2026-04-29	2027-04-28
WTXE1104 A1033-1	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104 A1033-2	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104 A1033-3	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B:Below 1GHz						
WTXE1010 A1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038 A1001	Amplifier	Agilent	8447D	2944A104 57	2026-02-05	2027-02-04
WTXE1001 A1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
WTXE1104 A1031-1	Coaxial Cable	/	1.5MRFC-LWB 3	/	2026-02-23	2027-02-22
WTXE1104 A1031-2	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104 A1031-3	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C:Below 1GHz						
WTXE1093 A1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1010 A1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007 A1003	Amplifier	HP	8447F	2944A038 69	2026-02-05	2027-02-04

WTXE1010 A1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1104 A1034-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1034-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1034-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz						
WTXE1093 A1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1103 A1005	Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
WTXE1103 A1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2026-02-05	2027-02-04
WTXE1010 A1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003 A1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104 A1035-1	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1035-2	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104 A1035-3	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#						
WTXE1104 A1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
WTXE1002 A1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
WTXE1003 A1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-05	2027-02-04
WTXE1104 A1036	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104 A1038	Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#						
WTXE1001 A1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
WTXE1003 A1003	LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
WTXE1104	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22

Reference No.: WTD26X04116317W002

A1037						
-------	--	--	--	--	--	--

Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
LTE Test System*	Tonscend	JS1120-1	V3.1.46

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1046, §22.913(a)(2), §24.232(c), §27.50(b)(10), §27.50(c)(10), §27.50(d)(4), §27.50(h)(2)	RF Output Power Conducted Output Power: (note 2) EIRP/ERP: (note 3)	Compliant
§24.232(d), §27.50(d)(5)	Peak-to-average Ratio (PAR) of Transmitter (note 2)	Compliant
§2.1049	Emission Bandwidth (note 2)	Compliant
§2.1053, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h) §27.53(m)(4)	Spurious Emissions at Antenna Terminal (note 2)	Compliant
§2.1053, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h) §27.53(m)(4)	Spurious Radiation Emissions (note 3)	Compliant
§2.1051, §22.917(a), §24.238(a), §27.53(c)(2), §27.53(g), §27.53(h), §27.53(m)(4)	Out of Band Emissions (note 2)	Compliant
§2.1055, §22.355, §24.235, §27.54	Frequency Stability (note 2)	Compliant
Note 1: Module FCC ID:2ANPO00NRF9151 Note 2: Reference module data Note 3: New test added		

3. RF Output Power

3.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

3.2 Test Procedure

- Conducted output power test method:

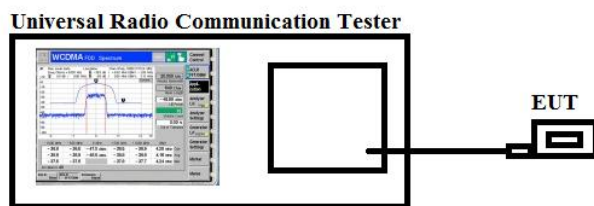

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
5. The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

6. The maximum effective radiated power e.r.p. is calculated from the maximum equivalent isotropically radiated power (e.i.r.p.) by subtracting 2.15 dB:

$$E.R.P. = E.I.R.P. - 2.15 \text{ dB}$$

3.3 Summary of Test Results/Plots

Max. Conducted Output Power

Reference to the report 77535RRF.001A1& 77535RRF.002A1& 77535RRF.003A1

Test result: Pass

Max. ERP/EIRP as below:

NB-IOT Band 2 & NB-IOT Band 25

Worst-case of RF Power is Low Channel, Pi/2-BPSK, BW=15 kHz, Tone Number=1, Tone Offset=0, MSC/TBS=0.

Max Power	Conducted Output Power [dBm]	Gain (dBi)	E.I.R.P [dBm]	E.R.P [dBm]	Verdict
LOW	22.63	0.5	23.13	/	PASS
MIDDLE	22.60	0.5	23.10	/	PASS
HIGH	22.62	0.5	23.12	/	PASS

NOTE: The LTE Cat NB2 Band 2 is completely included in the LTE Cat NB2 Band 25, so the channels of the LTE Cat NB2 Band 25 were tested to give conformity to the assigned block.

NB-IOT Band 4 & NB-IOT Band 66

Worst-case of RF Power is Low Channel, Pi/2-BPSK, BW=15 kHz, Tone Number=1, Tone Offset=0, MSC/TBS=0.

Max Power	Conducted Output Power [dBm]	Gain (dBi)	E.I.R.P [dBm]	E.R.P [dBm]	Verdict
LOW	22.54	0.5	23.04	/	PASS
MIDDLE	22.43	0.5	22.93	/	PASS
HIGH	22.38	0.5	22.88	/	PASS

NOTE: The LTE Cat NB2 Band 4 is completely included in the LTE Cat NB2 Band 66, so the channels of the LTE Cat NB2 Band 25 were tested to give conformity to the assigned block.

NB-IOT Band 5 & NB-IOT Band 26

Worst case of RF Power is Middle Channel, Pi/4-QPSK, BW=15 kHz, Tone Number=1, Tone Offset=0, MSC/TBS=3.

Max Power	Conducted Output Power [dBm]	Gain (dBi)	E.I.R.P [dBm]	E.R.P [dBm]	Verdict
LOW	22.41	-3.0	19.41	17.26	PASS
MIDDLE	22.44	-3.0	19.44	17.29	PASS
HIGH	22.42	-3.0	19.42	17.27	PASS

NB-IOT Band 12 & NB-IOT Band 17 & NB-IOT Band 85

Worst-case of RF Power is Low Channel. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3.

Max Power	Conducted Output Power [dBm]	Gain (dBi)	E.I.R.P [dBm]	E.R.P [dBm]	Verdict
LOW	22.16	-6.0	16.16	14.01	PASS
MIDDLE	22.13	-6.0	16.13	13.98	PASS
HIGH	22.11	-6.0	16.11	13.96	PASS

NOTE1: The LTE Cat NB2 Band 12 is completely included in the LTE Cat NB2 Band 85, so the channels of the LTE Cat NB2 Band 25 were tested to give conformity to the assigned block.

NOTE2: The LTE Cat NB2 Band 17 is completely included in the LTE Cat NB2 Band 85, so the channels of the LTE Cat NB2 Band 25 were tested to give conformity to the assigned block.

NB-IOT Band 13

Worst-case of RF Power is Low Channel. Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3.

Max Power	Conducted Output Power [dBm]	Gain (dBi)	E.I.R.P [dBm]	E.R.P [dBm]	Verdict
LOW	22.27	-4.0	18.27	16.12	PASS
HIGH	22.17	-4.0	18.17	16.02	PASS

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

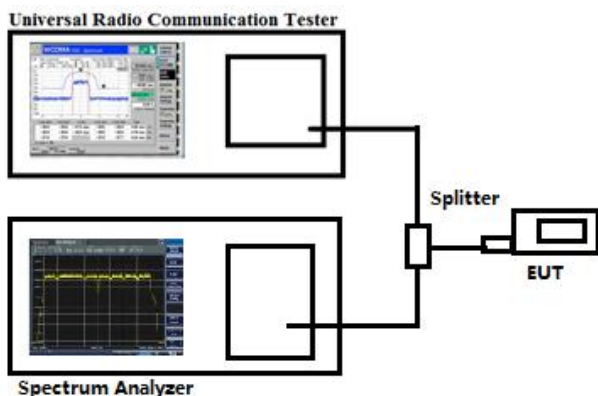

4.3 Summary of Test Results

Reference to the report 77535RRF.001A1& 77535RRF.002A1& 77535RRF.003A1

Test result: Pass

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

Page 18 of 105

5. Emission Bandwidth

5.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

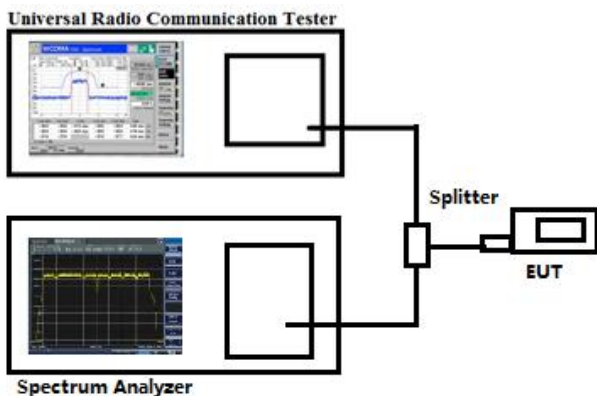

5.3 Summary of Test Results/Plots

Reference to the report 77535RRF.001A1& 77535RRF.002A1& 77535RRF.003A1

Test result: Pass

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5MHz.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

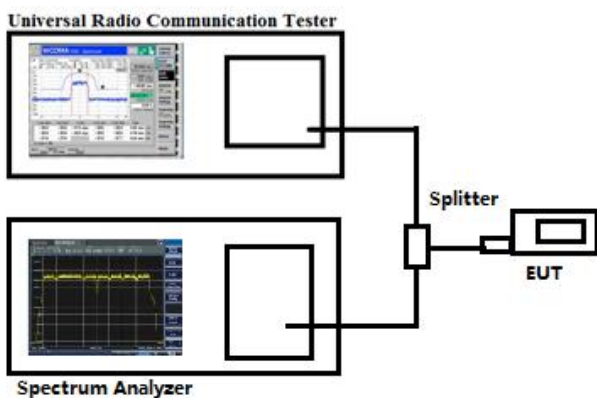

Reference No.: WTD26X04116317W002

6.3 Summary of Test Results/Plots

Reference to the report 77535RRF.001A1& 77535RRF.002A1& 77535RRF.003A1

Test result: Pass

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$


7.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case(sub-carrier:15kHz) is recorded in this report.


➤ Spurious Emissions Below 1GHz

Test Mode	FDD_LTE Band 2	Polarity:	Horizontal
-----------	----------------	-----------	------------

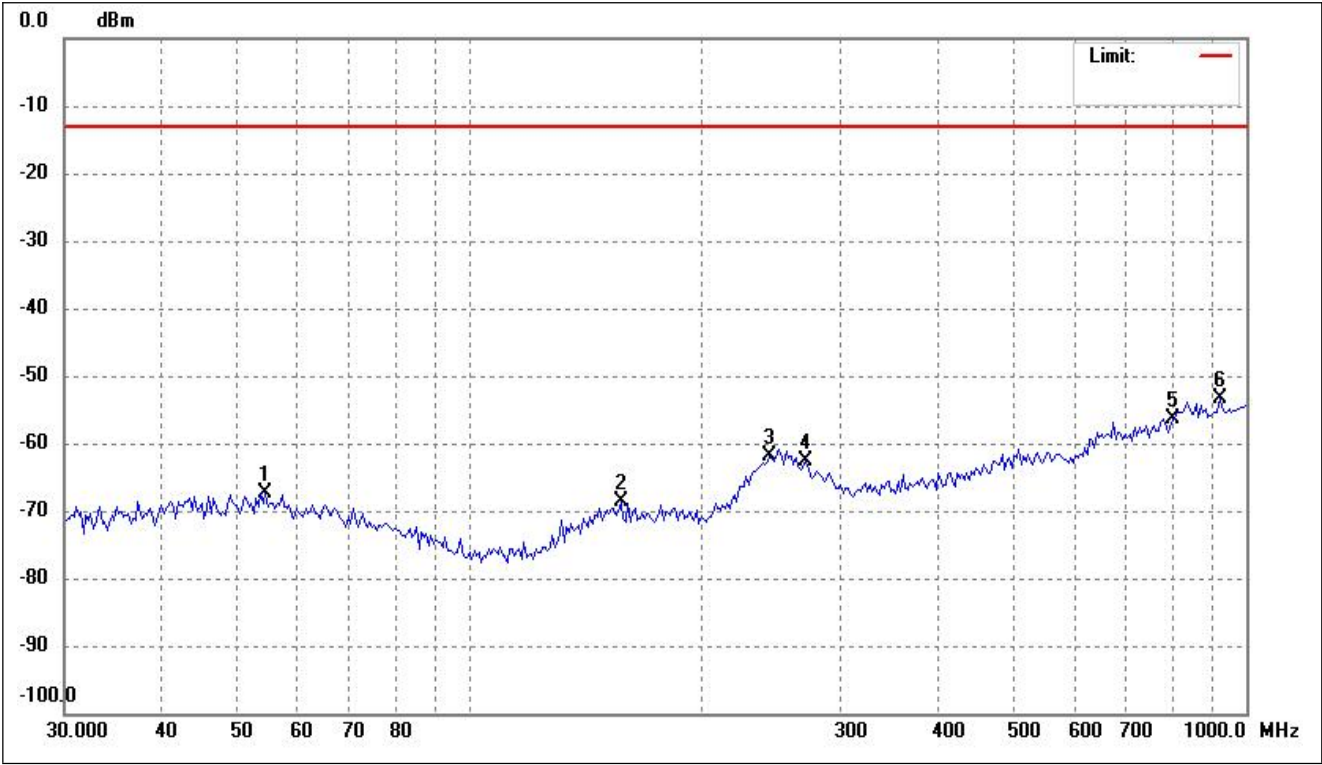


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.5167	-70.31	2.95	-67.36	-13.00	-54.36	ERP
2	156.4259	-69.44	0.94	-68.50	-13.00	-55.50	ERP
3	243.5431	-69.21	7.44	-61.77	-13.00	-48.77	ERP
4	270.6162	-69.33	6.83	-62.50	-13.00	-49.50	ERP
5	804.2523	-68.01	11.69	-56.32	-13.00	-43.32	ERP
6	925.6132	-66.72	13.47	-53.25	-13.00	-40.25	ERP

Test Mode	FDD_LTE Band 2	Polarity:	Vertical
-----------	----------------	-----------	----------

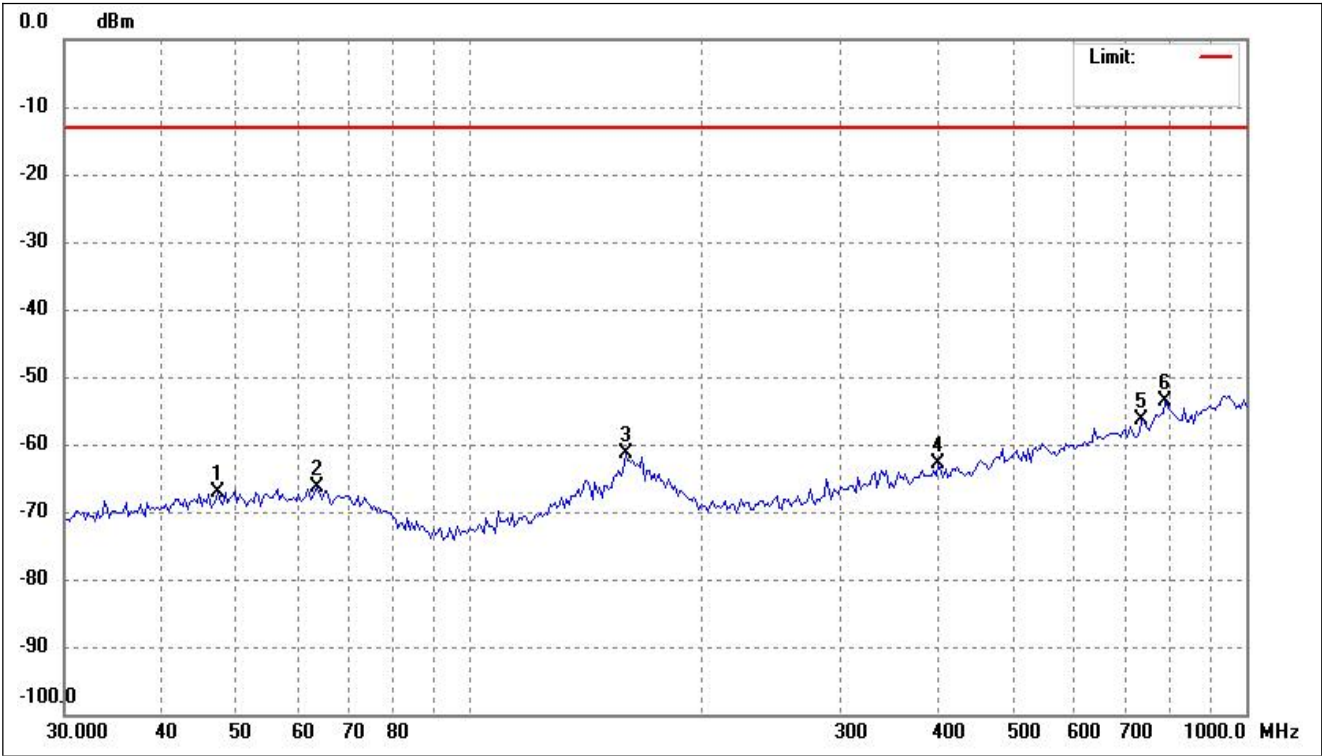


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.3688	-70.25	3.25	-67.00	-13.00	-54.00	ERP
2	63.6312	-69.67	3.22	-66.45	-13.00	-53.45	ERP
3	158.6399	-68.65	7.39	-61.26	-13.00	-48.26	ERP
4	401.1050	-68.38	5.39	-62.99	-13.00	-49.99	ERP
5	734.0373	-67.25	10.96	-56.29	-13.00	-43.29	ERP
6	787.4749	-65.95	12.34	-53.61	-13.00	-40.61	ERP

Test Mode	FDD_LTE Band 4	Polarity:	Horizontal
-----------	----------------	-----------	------------

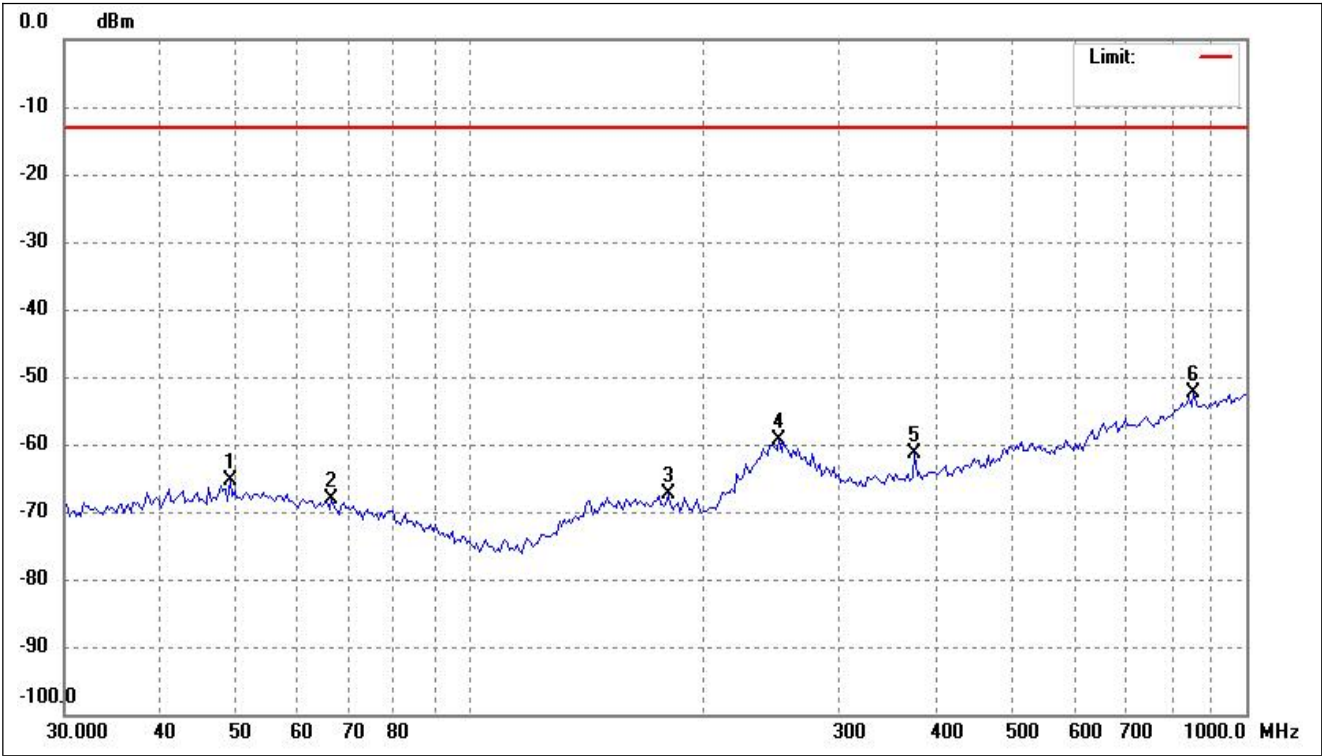


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.0627	-68.82	3.41	-65.41	-13.00	-52.41	ERP
2	66.3715	-69.71	1.51	-68.20	-13.00	-55.20	ERP
3	180.0304	-68.29	0.98	-67.31	-13.00	-54.31	ERP
4	250.4859	-67.87	8.51	-59.36	-13.00	-46.36	ERP
5	373.8862	-66.06	4.57	-61.49	-13.00	-48.49	ERP
6	856.7597	-65.73	13.42	-52.31	-13.00	-39.31	ERP

Test Mode	FDD_LTE Band 4	Polarity:	Vertical
-----------	----------------	-----------	----------

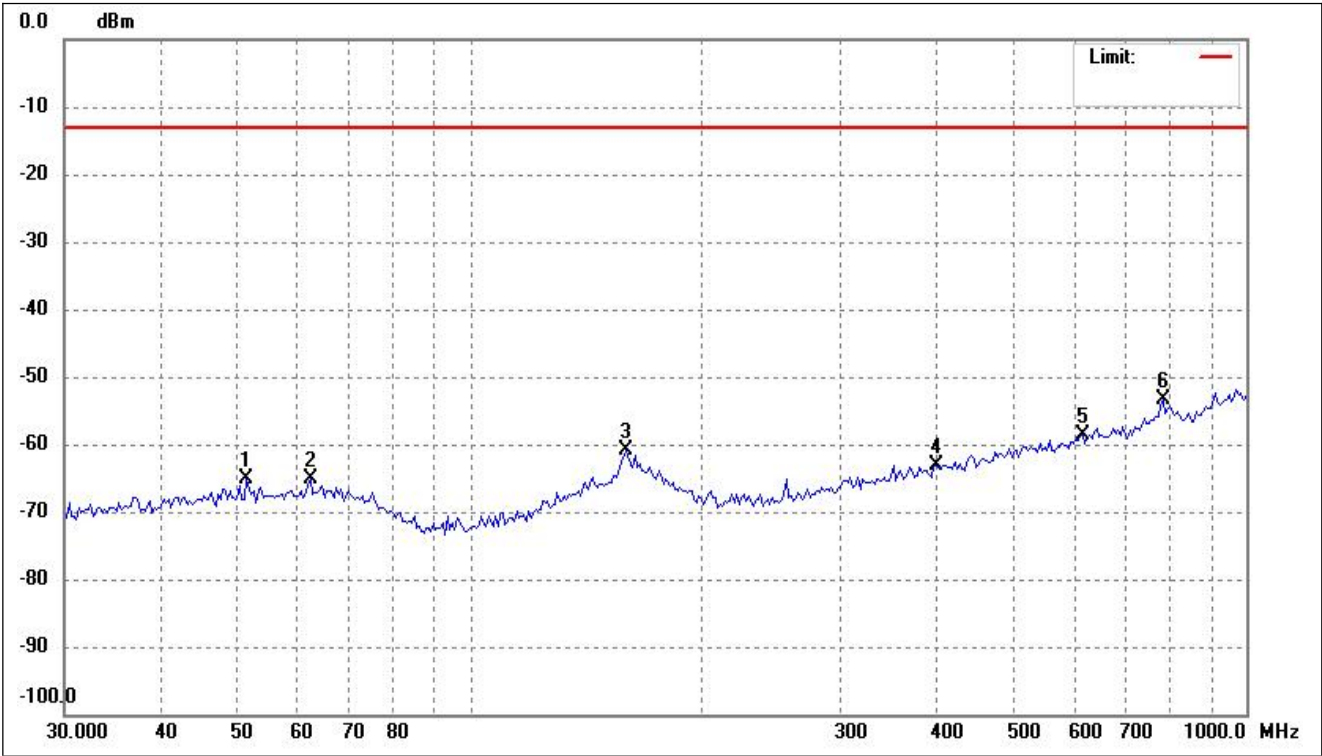


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.5365	-68.66	3.47	-65.19	-13.00	-52.19	ERP
2	62.3038	-68.37	3.25	-65.12	-13.00	-52.12	ERP
3	158.6399	-68.20	7.39	-60.81	-13.00	-47.81	ERP
4	398.2962	-68.40	5.33	-63.07	-13.00	-50.07	ERP
5	615.7743	-67.69	9.03	-58.66	-13.00	-45.66	ERP
6	781.9606	-65.69	12.20	-53.49	-13.00	-40.49	ERP

Test Mode	FDD_LTE Band 5	Polarity:	Horizontal
-----------	----------------	-----------	------------

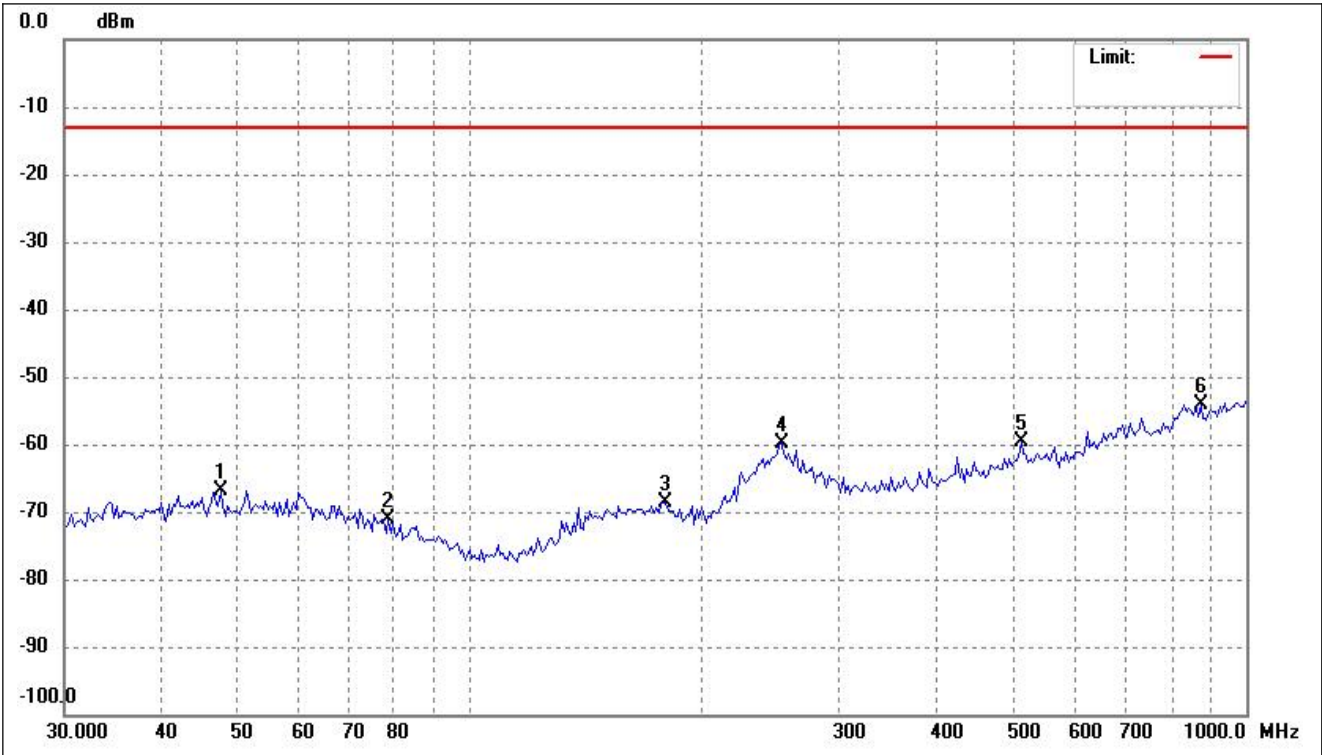


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.7028	-70.17	3.28	-66.89	-13.00	-53.89	ERP
2	78.5645	-70.65	-0.43	-71.08	-13.00	-58.08	ERP
3	178.7697	-69.66	0.98	-68.68	-13.00	-55.68	ERP
4	252.2523	-68.15	8.36	-59.79	-13.00	-46.79	ERP
5	512.9478	-67.07	7.41	-59.66	-13.00	-46.66	ERP
6	875.0133	-67.32	13.11	-54.21	-13.00	-41.21	ERP

Test Mode	FDD_LTE Band 5	Polarity:	Vertical
-----------	----------------	-----------	----------

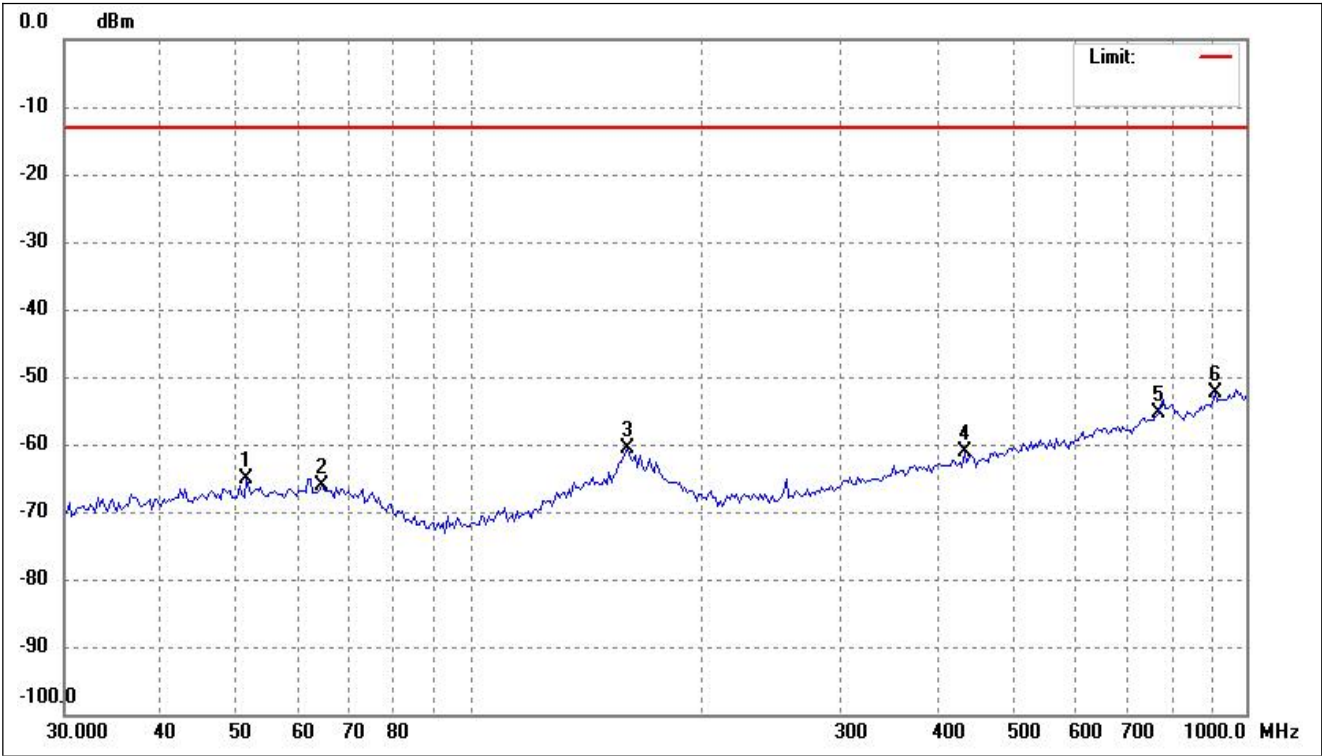


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.5365	-68.66	3.47	-65.19	-13.00	-52.19	ERP
2	64.5319	-69.31	3.20	-66.11	-13.00	-53.11	ERP
3	159.7586	-68.35	7.83	-60.52	-13.00	-47.52	ERP
4	433.3397	-67.20	5.97	-61.23	-13.00	-48.23	ERP
5	771.0475	-67.34	11.92	-55.42	-13.00	-42.42	ERP
6	912.6953	-64.81	12.34	-52.47	-13.00	-39.47	ERP

Test Mode	FDD_LTE Band 12	Polarity:	Horizontal
-----------	-----------------	-----------	------------

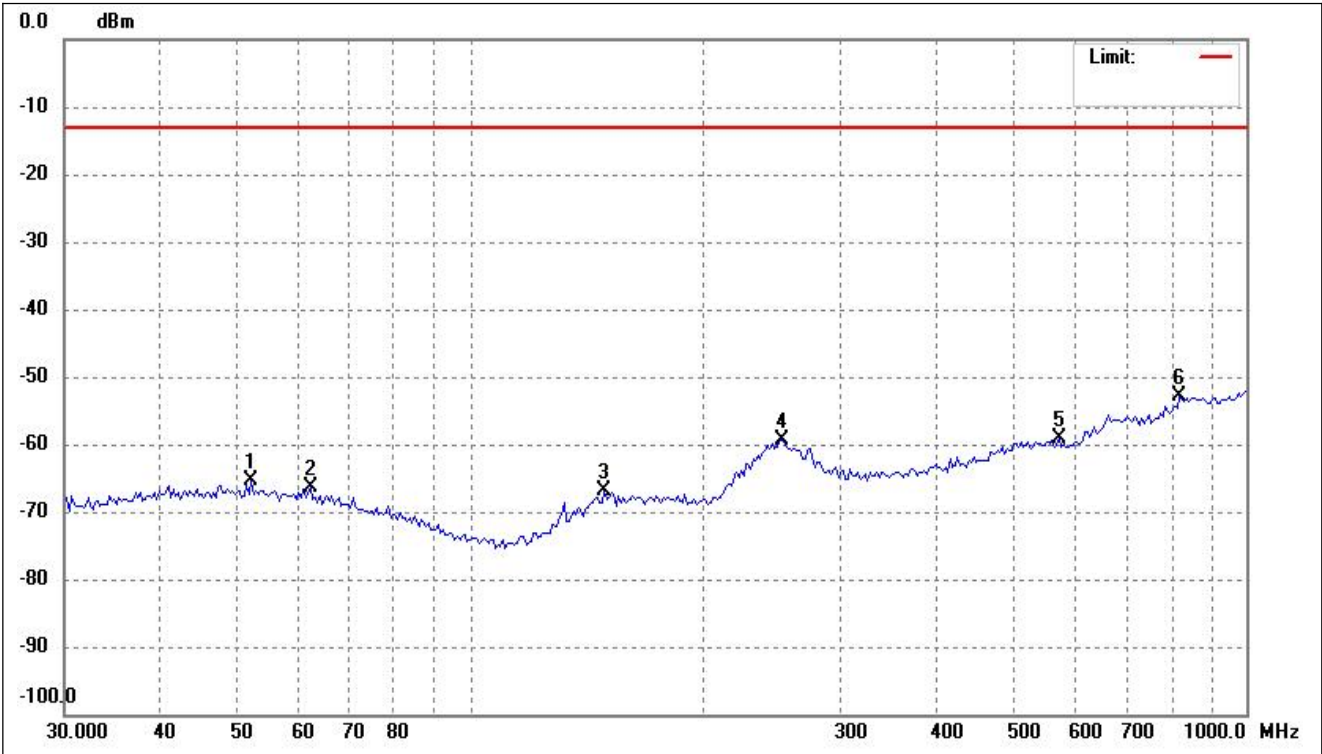


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.2659	-68.53	3.22	-65.31	-13.00	-52.31	ERP
2	62.3038	-68.30	2.01	-66.29	-13.00	-53.29	ERP
3	148.9175	-67.66	0.75	-66.91	-13.00	-53.91	ERP
4	252.2523	-67.84	8.36	-59.48	-13.00	-46.48	ERP
5	573.9882	-67.13	7.96	-59.17	-13.00	-46.17	ERP
6	821.3871	-65.77	12.97	-52.80	-13.00	-39.80	ERP

Test Mode	FDD_LTE Band 12	Polarity:	Vertical
-----------	-----------------	-----------	----------

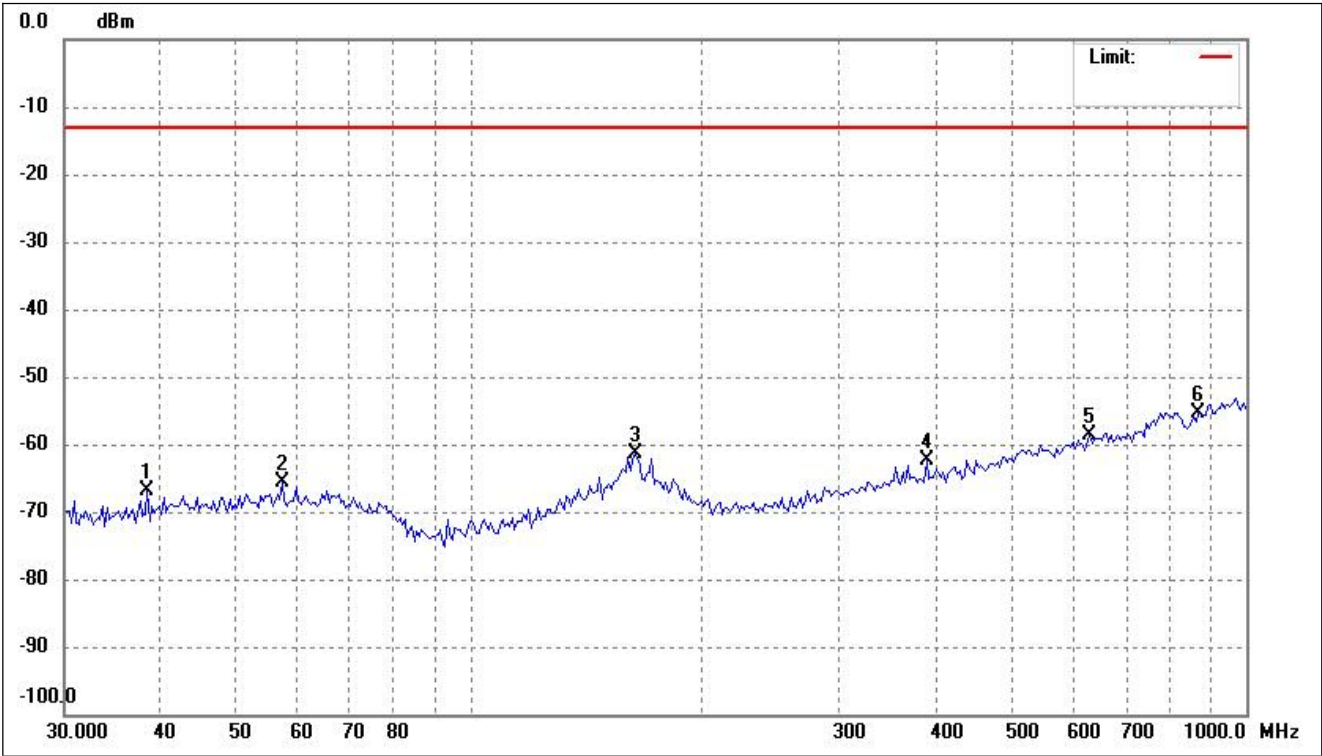


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.3651	-69.34	2.39	-66.95	-13.00	-53.95	ERP
2	57.2654	-68.85	3.35	-65.50	-13.00	-52.50	ERP
3	163.1623	-68.67	7.37	-61.30	-13.00	-48.30	ERP
4	387.2565	-67.49	5.11	-62.38	-13.00	-49.38	ERP
5	628.8936	-67.80	9.19	-58.61	-13.00	-45.61	ERP
6	868.8860	-67.26	12.01	-55.25	-13.00	-42.25	ERP

Test Mode	FDD_LTE Band 13	Polarity:	Horizontal
-----------	-----------------	-----------	------------

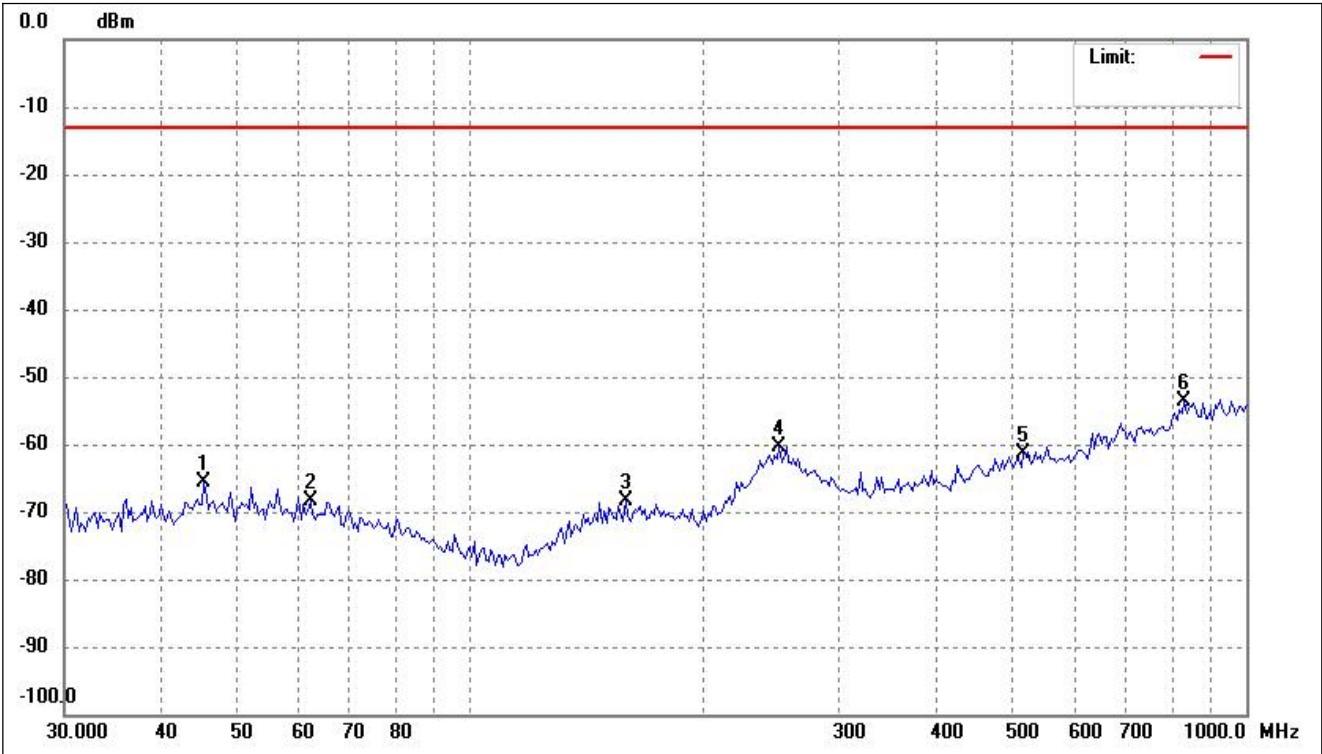


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.4131	-68.80	3.06	-65.74	-13.00	-52.74	ERP
2	62.3038	-70.43	2.01	-68.42	-13.00	-55.42	ERP
3	158.6399	-69.42	0.97	-68.45	-13.00	-55.45	ERP
4	250.4859	-68.82	8.51	-60.31	-13.00	-47.31	ERP
5	516.5651	-68.73	7.44	-61.29	-13.00	-48.29	ERP
6	833.0127	-67.05	13.37	-53.68	-13.00	-40.68	ERP

Test Mode	FDD_LTE Band 13	Polarity:	Vertical
-----------	-----------------	-----------	----------

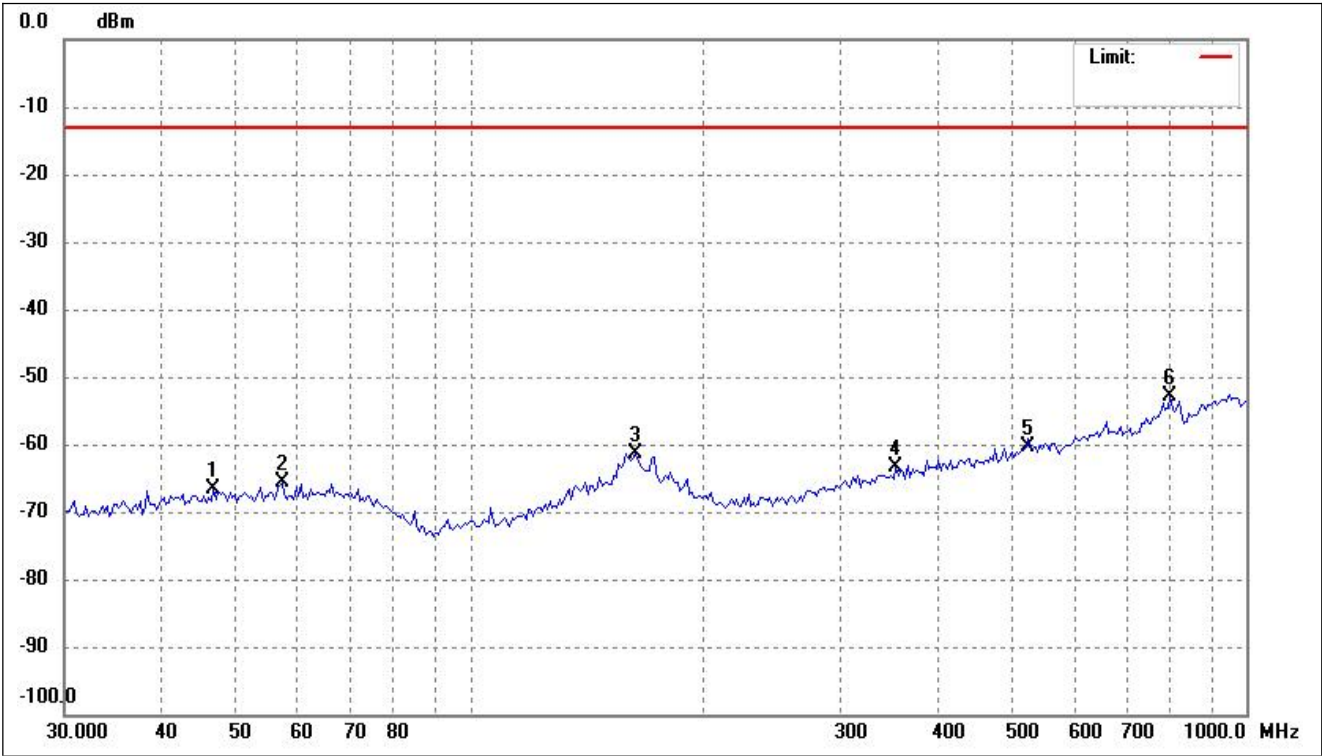


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.7077	-69.89	3.19	-66.70	-13.00	-53.70	ERP
2	57.2654	-68.85	3.35	-65.50	-13.00	-52.50	ERP
3	163.1623	-68.67	7.37	-61.30	-13.00	-48.30	ERP
4	353.4472	-67.90	4.41	-63.49	-13.00	-50.49	ERP
5	520.2079	-67.87	7.51	-60.36	-13.00	-47.36	ERP
6	798.6205	-65.60	12.62	-52.98	-13.00	-39.98	ERP

Test Mode	FDD_LTE Band 17	Polarity:	Horizontal
-----------	-----------------	-----------	------------

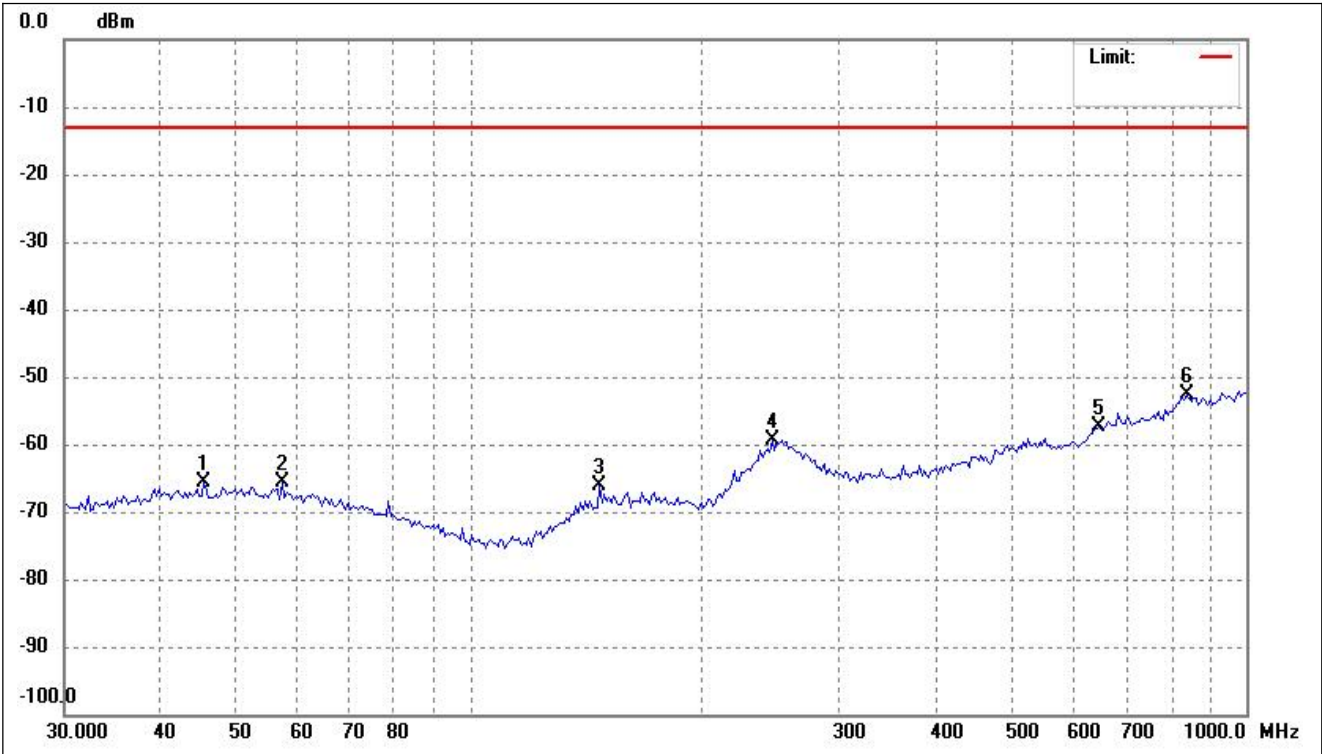


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.4131	-68.80	3.06	-65.74	-13.00	-52.74	ERP
2	57.2654	-68.26	2.62	-65.64	-13.00	-52.64	ERP
3	146.8392	-66.64	0.50	-66.14	-13.00	-53.14	ERP
4	245.2606	-67.21	7.74	-59.47	-13.00	-46.47	ERP
5	646.8217	-66.93	9.50	-57.43	-13.00	-44.43	ERP
6	838.8870	-66.21	13.50	-52.71	-13.00	-39.71	ERP

Test Mode	FDD_LTE Band 17	Polarity:	Vertical
-----------	-----------------	-----------	----------

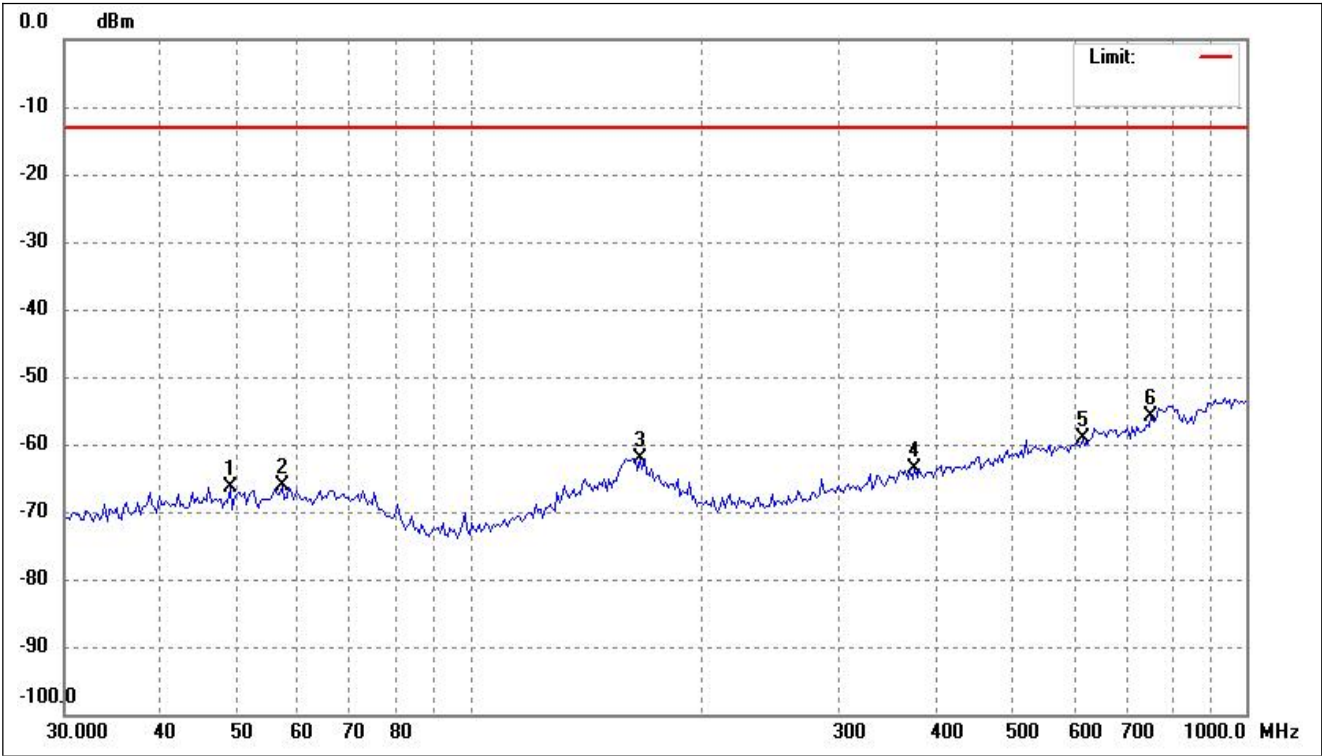


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.0627	-69.71	3.41	-66.30	-13.00	-53.30	ERP
2	57.2654	-69.48	3.35	-66.13	-13.00	-53.13	ERP
3	165.4716	-69.00	6.96	-62.04	-13.00	-49.04	ERP
4	373.8862	-68.48	4.83	-63.65	-13.00	-50.65	ERP
5	615.7743	-68.07	9.03	-59.04	-13.00	-46.04	ERP
6	754.9628	-67.40	11.50	-55.90	-13.00	-42.90	ERP

Test Mode	FDD_LTE Band 25	Polarity:	Horizontal
-----------	-----------------	-----------	------------

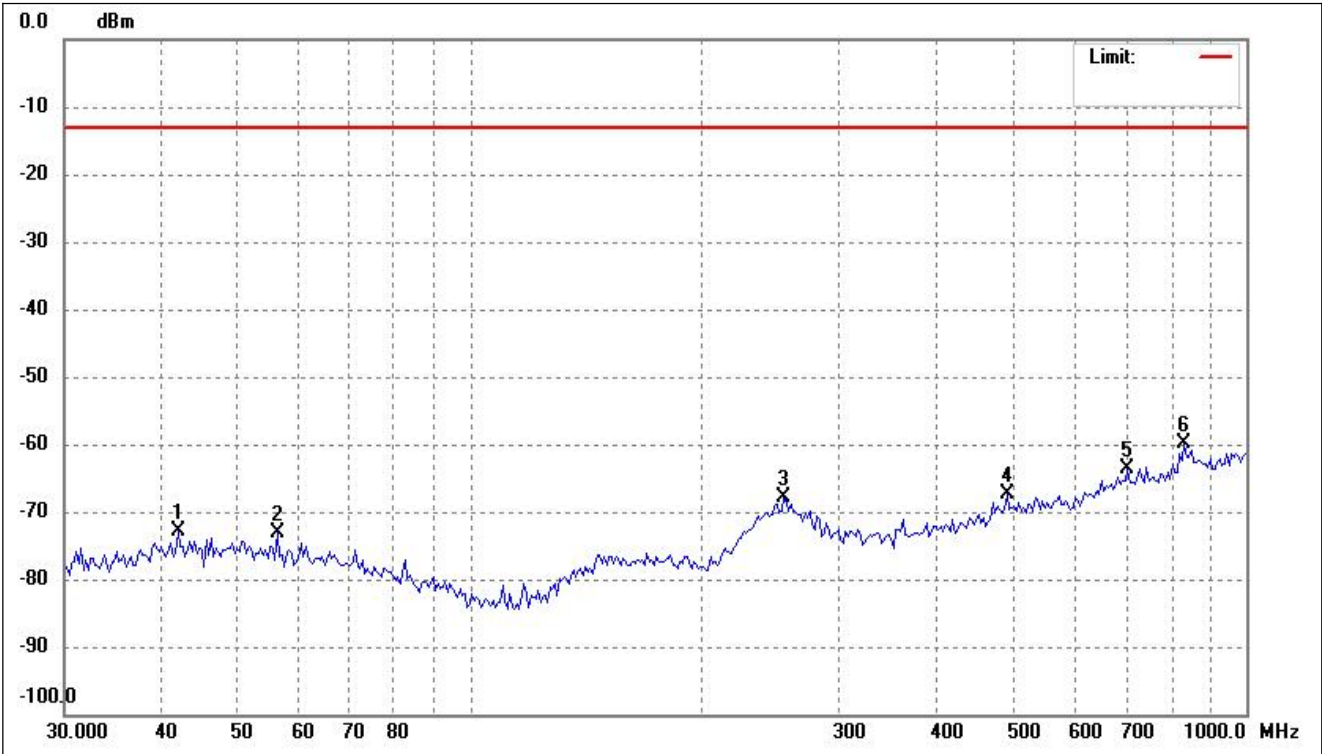


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.0350	-75.54	2.74	-72.80	-13.00	-59.80	ERP
2	56.4662	-75.77	2.71	-73.06	-13.00	-60.06	ERP
3	254.0312	-76.09	8.21	-67.88	-13.00	-54.88	ERP
4	491.7700	-74.40	7.07	-67.33	-13.00	-54.33	ERP
5	703.7314	-74.68	11.00	-63.68	-13.00	-50.68	ERP
6	833.0127	-73.33	13.37	-59.96	-13.00	-46.96	ERP

Test Mode	FDD_LTE Band 25	Polarity:	Vertical
-----------	-----------------	-----------	----------

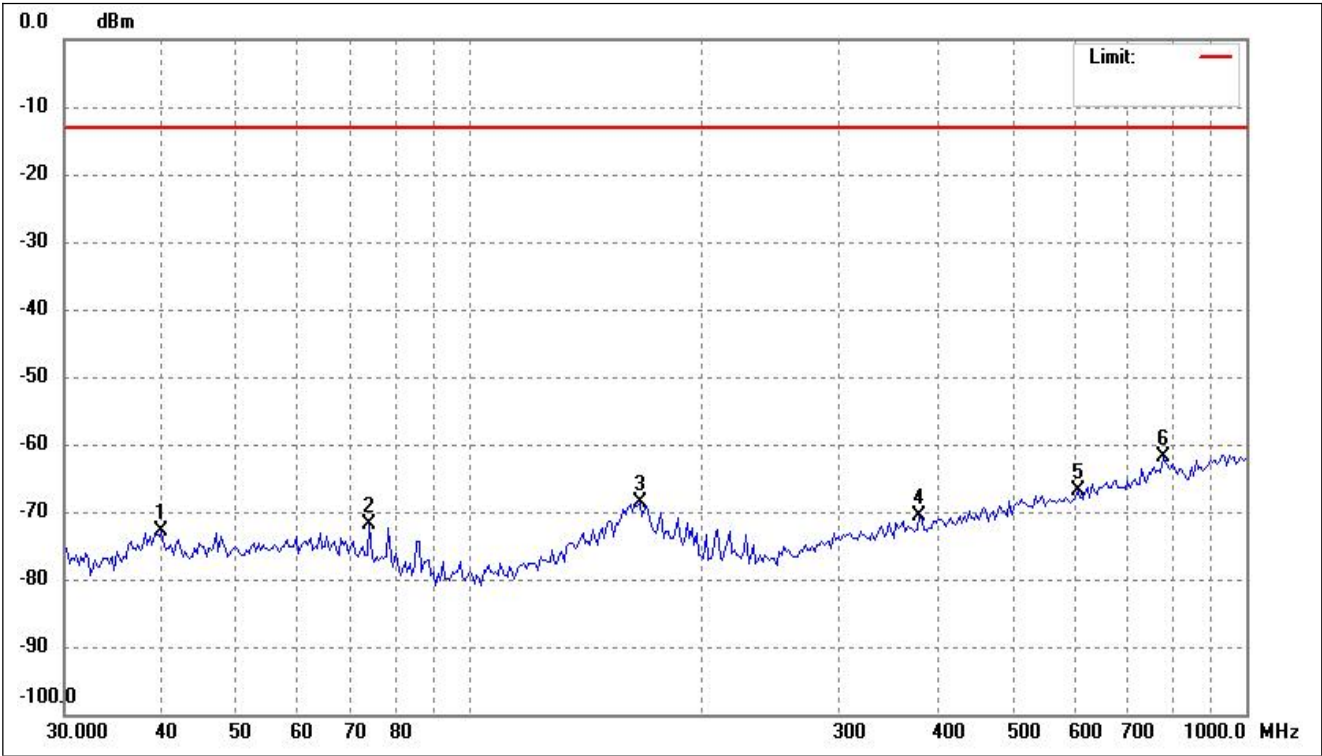


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.0173	-75.35	2.55	-72.80	-13.00	-59.80	ERP
2	74.2696	-73.80	1.94	-71.86	-13.00	-58.86	ERP
3	165.4716	-75.67	6.96	-68.71	-13.00	-55.71	ERP
4	379.1780	-75.57	4.94	-70.63	-13.00	-57.63	ERP
5	607.1806	-75.75	8.92	-66.83	-13.00	-53.83	ERP
6	781.9606	-74.17	12.20	-61.97	-13.00	-48.97	ERP

Test Mode	FDD_LTE Band 26	Polarity:	Horizontal
-----------	-----------------	-----------	------------

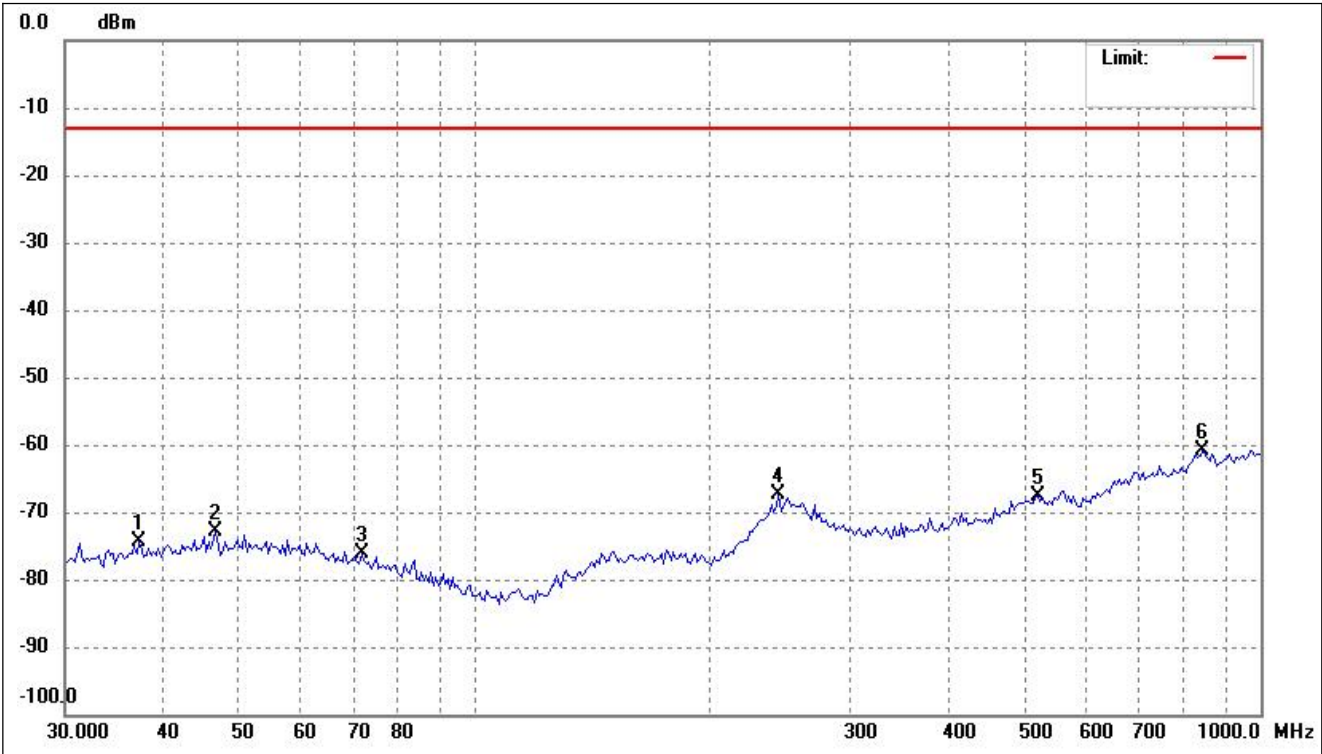


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.3017	-76.77	2.29	-74.48	-13.00	-61.48	ERP
2	46.7077	-76.08	3.19	-72.89	-13.00	-59.89	ERP
3	71.7054	-76.95	0.77	-76.18	-13.00	-63.18	ERP
4	243.5431	-74.79	7.44	-67.35	-13.00	-54.35	ERP
5	520.2079	-75.17	7.47	-67.70	-13.00	-54.70	ERP
6	844.8028	-74.60	13.63	-60.97	-13.00	-47.97	ERP

Test Mode	FDD_LTE Band 26	Polarity:	Vertical
-----------	-----------------	-----------	----------

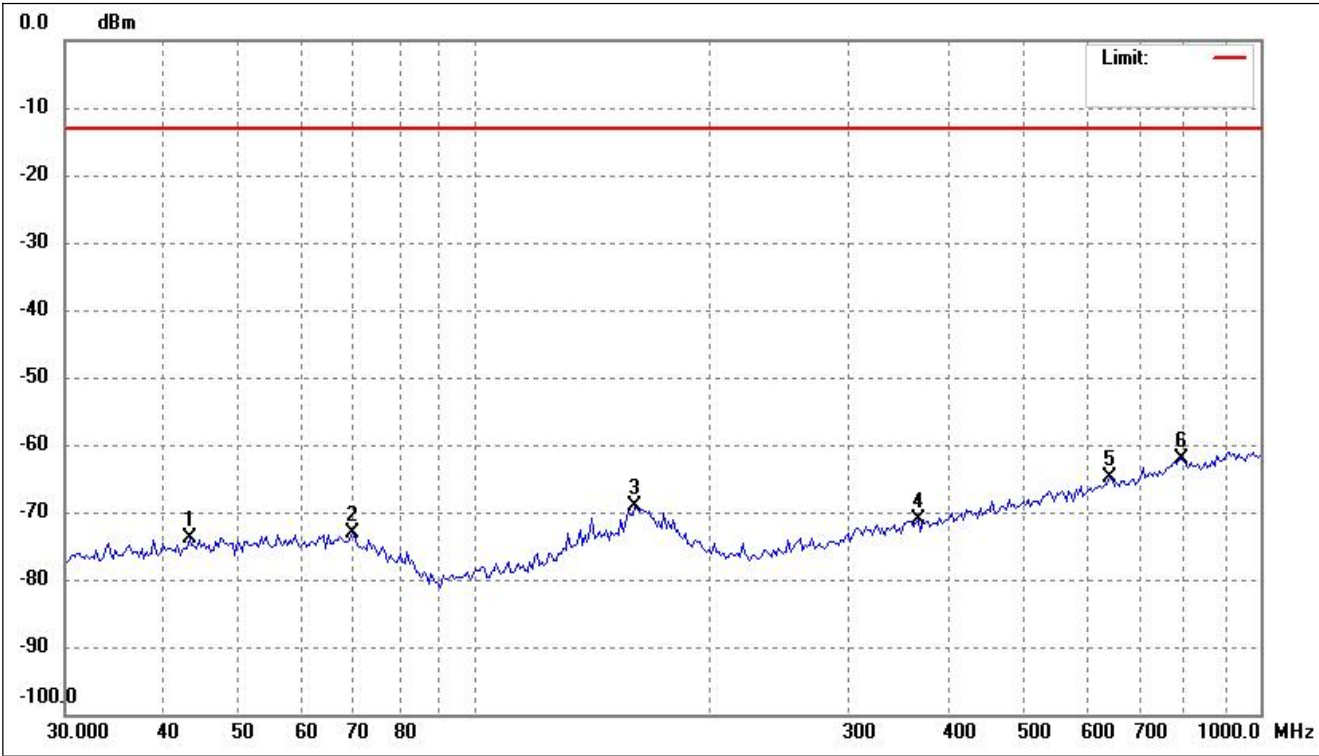


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	43.2333	-76.62	2.86	-73.76	-13.00	-60.76	ERP
2	69.7179	-76.24	3.10	-73.14	-13.00	-60.14	ERP
3	159.7586	-76.91	7.83	-69.08	-13.00	-56.08	ERP
4	366.0866	-75.87	4.67	-71.20	-13.00	-58.20	ERP
5	642.2923	-74.11	9.36	-64.75	-13.00	-51.75	ERP
6	793.0281	-74.70	12.48	-62.22	-13.00	-49.22	ERP

Test Mode	FDD_LTE Band 66	Polarity:	Horizontal
-----------	-----------------	-----------	------------

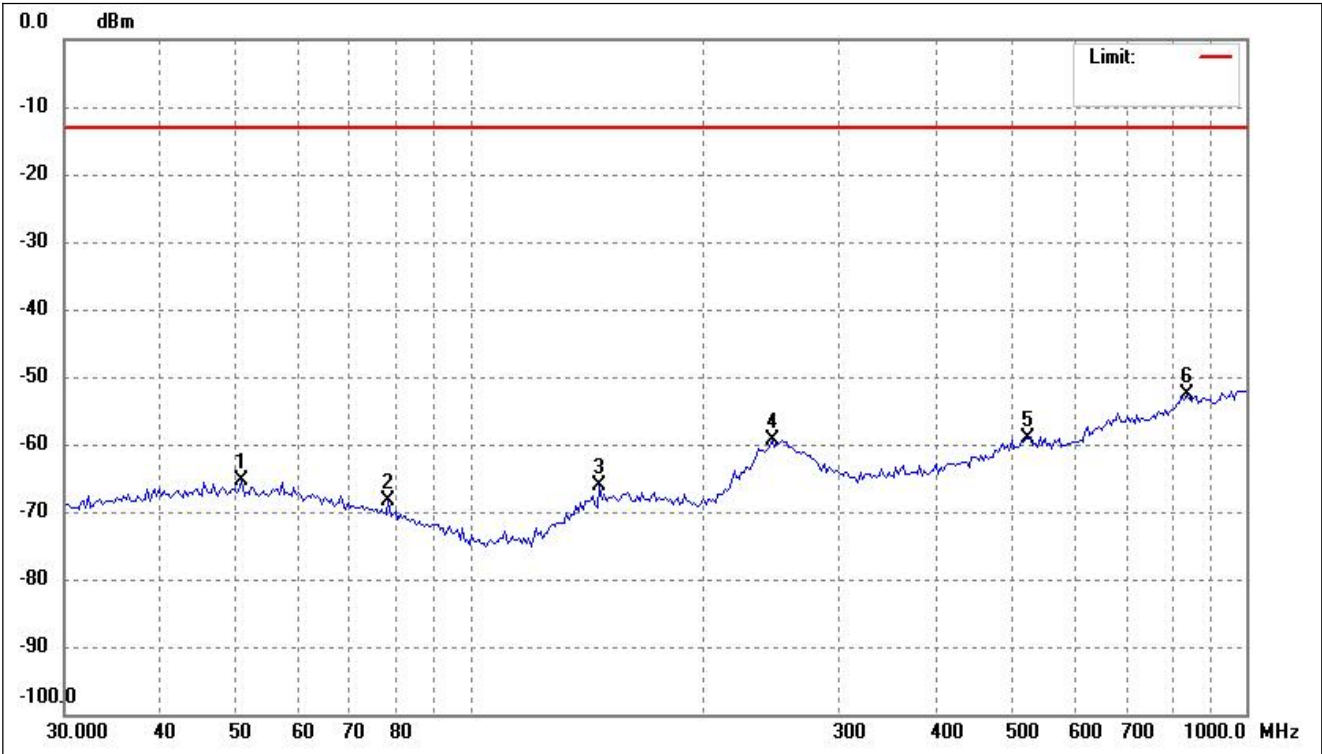


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.8172	-68.80	3.40	-65.40	-13.00	-52.40	ERP
2	78.5645	-67.93	-0.43	-68.36	-13.00	-55.36	ERP
3	146.8392	-66.64	0.50	-66.14	-13.00	-53.14	ERP
4	245.2606	-67.02	7.74	-59.28	-13.00	-46.28	ERP
5	523.8763	-66.62	7.50	-59.12	-13.00	-46.12	ERP
6	838.8870	-66.21	13.50	-52.71	-13.00	-39.71	ERP

Test Mode	FDD_LTE Band 66	Polarity:	Vertical
-----------	-----------------	-----------	----------

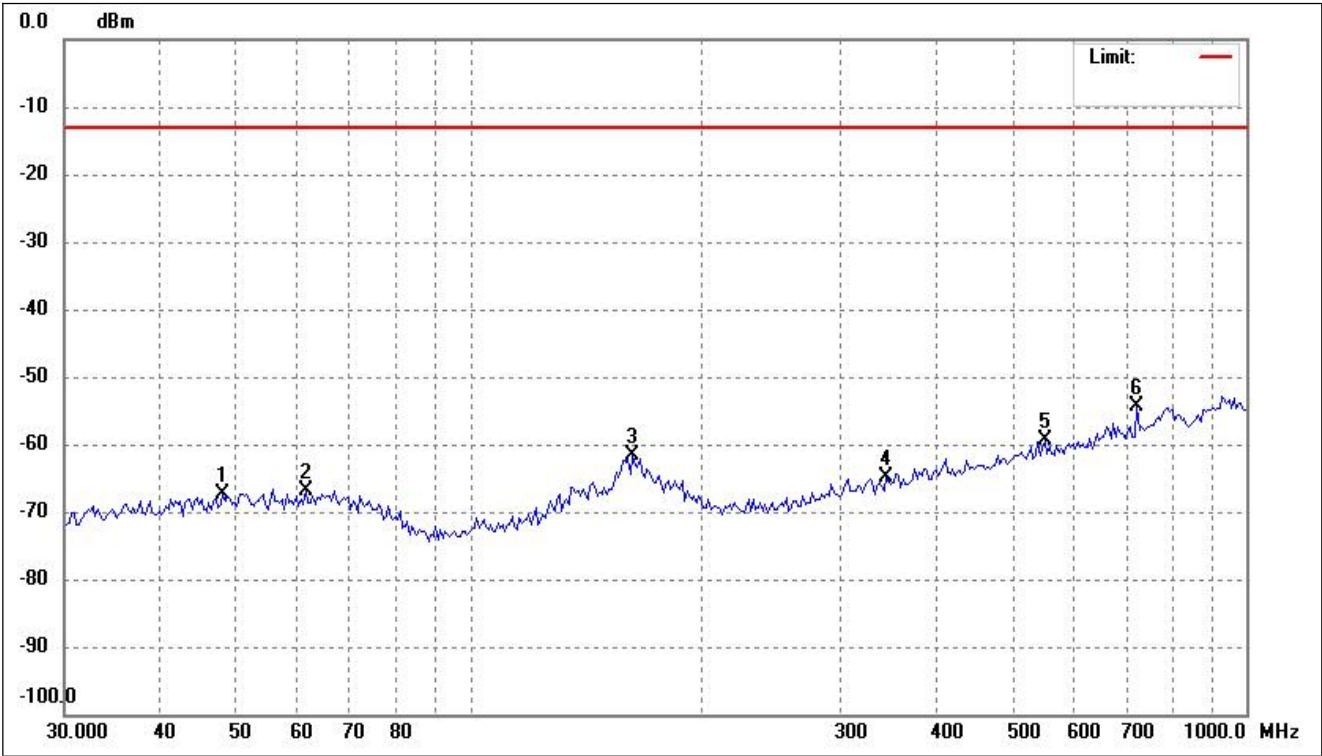


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.0392	-70.58	3.31	-67.27	-13.00	-54.27	ERP
2	61.4343	-70.20	3.27	-66.93	-13.00	-53.93	ERP
3	162.0197	-69.14	7.57	-61.57	-13.00	-48.57	ERP
4	343.6506	-69.18	4.21	-64.97	-13.00	-51.97	ERP
5	550.2902	-67.46	8.00	-59.46	-13.00	-46.46	ERP
6	723.7930	-65.19	10.70	-54.49	-13.00	-41.49	ERP

Test Mode	FDD_LTE Band 85	Polarity:	Horizontal
-----------	-----------------	-----------	------------

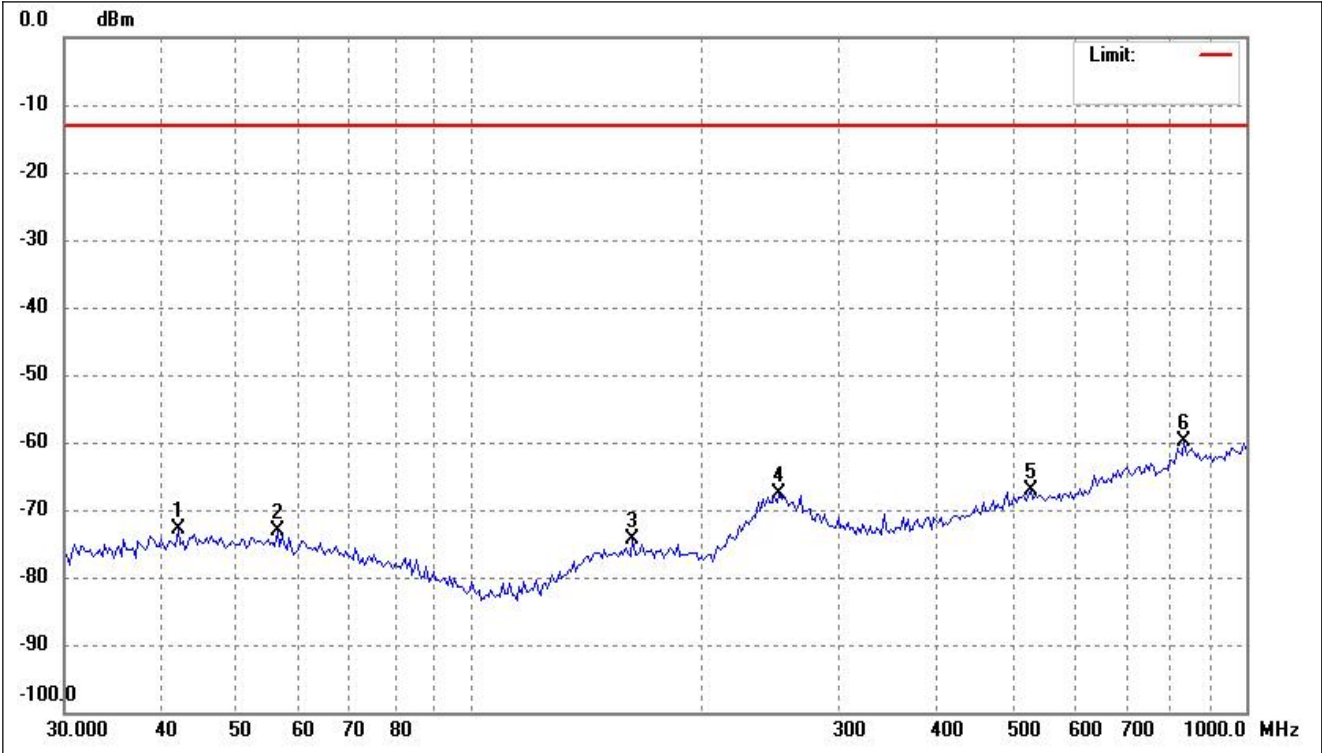

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.0350	-75.54	2.74	-72.80	-13.00	-59.80	ERP
2	56.4662	-75.77	2.71	-73.06	-13.00	-60.06	ERP
3	162.0197	-75.39	0.98	-74.41	-13.00	-61.41	ERP
4	250.4859	-76.02	8.51	-67.51	-13.00	-54.51	ERP
5	527.5707	-74.73	7.54	-67.19	-13.00	-54.19	ERP
6	833.0127	-73.33	13.37	-59.96	-13.00	-46.96	ERP

Test Mode	FDD_LTE Band 85	Polarity:	Vertical
-----------	-----------------	-----------	----------

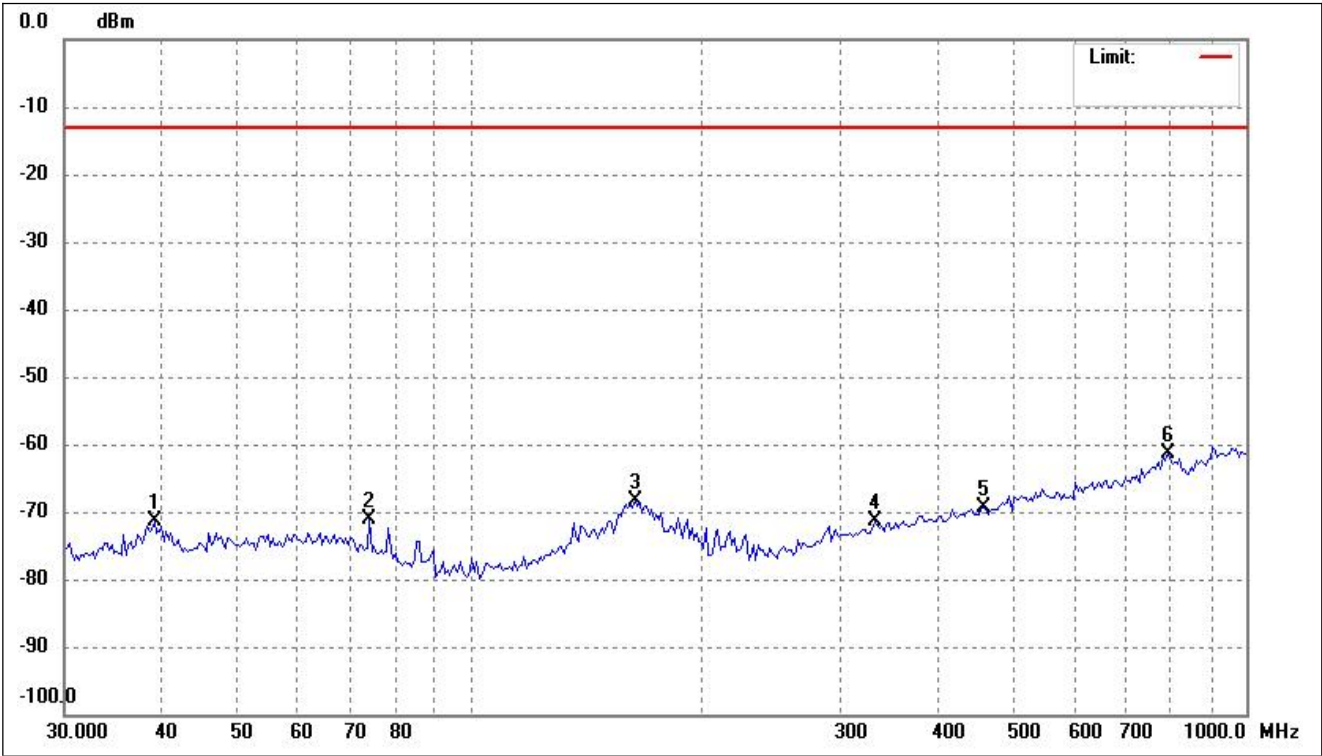


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	39.1825	-73.75	2.47	-71.28	-13.00	-58.28	ERP
2	74.2696	-73.14	1.94	-71.20	-13.00	-58.20	ERP
3	163.1623	-75.71	7.37	-68.34	-13.00	-55.34	ERP
4	331.7858	-75.30	3.96	-71.34	-13.00	-58.34	ERP
5	458.3987	-75.88	6.42	-69.46	-13.00	-56.46	ERP
6	793.0281	-73.85	12.48	-61.37	-13.00	-48.37	ERP

Note: $Margin = (Reading + Correct) - Limit$

➤ Spurious Emissions Above 1GHz


For FDD_LTE Band 2 Mode

Test mode:	Low Channel (1852.5MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

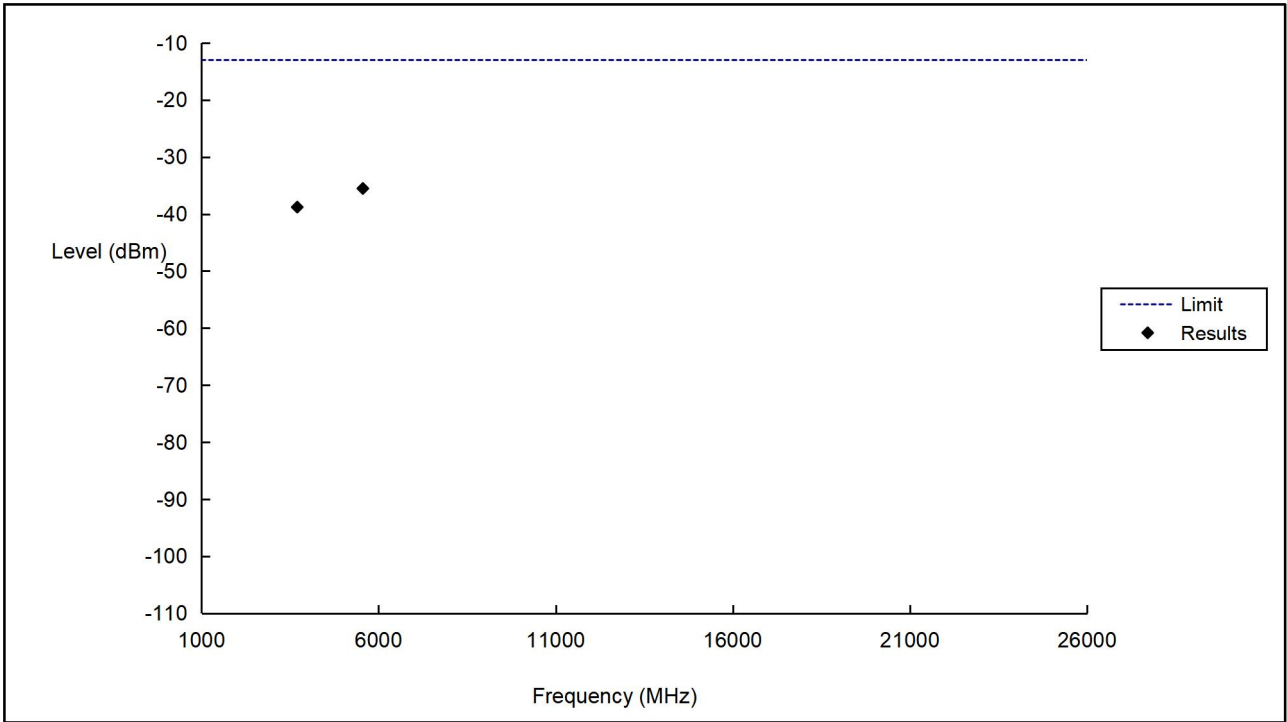


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3705.00	-38.79	-13	-25.79	RMS
2	5557.50	-35.52	-13	-22.52	RMS

Test mode:	Low Channel (1852.5MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

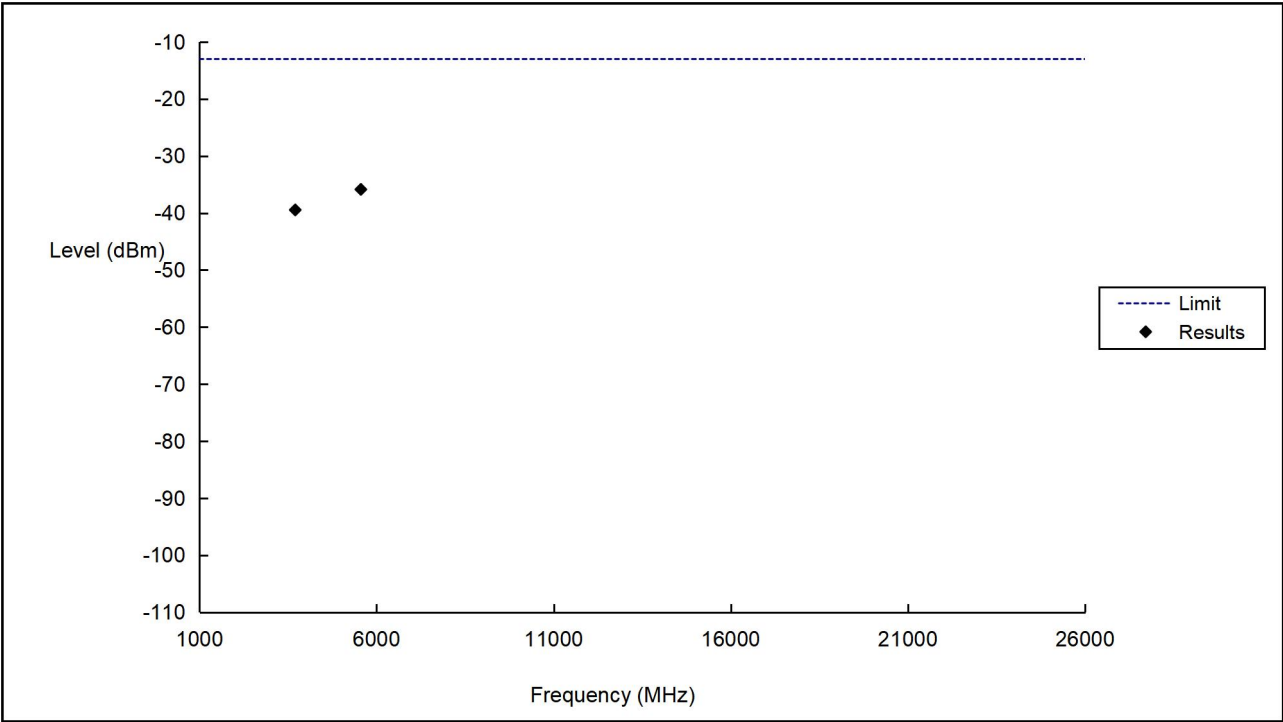


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3705.00	-39.46	-13	-26.46	RMS
2	5557.50	-35.86	-13	-22.86	RMS

Test mode:	Middle Channel (1880.0MHz)	Polarity:	Horizontal
------------	----------------------------	-----------	------------

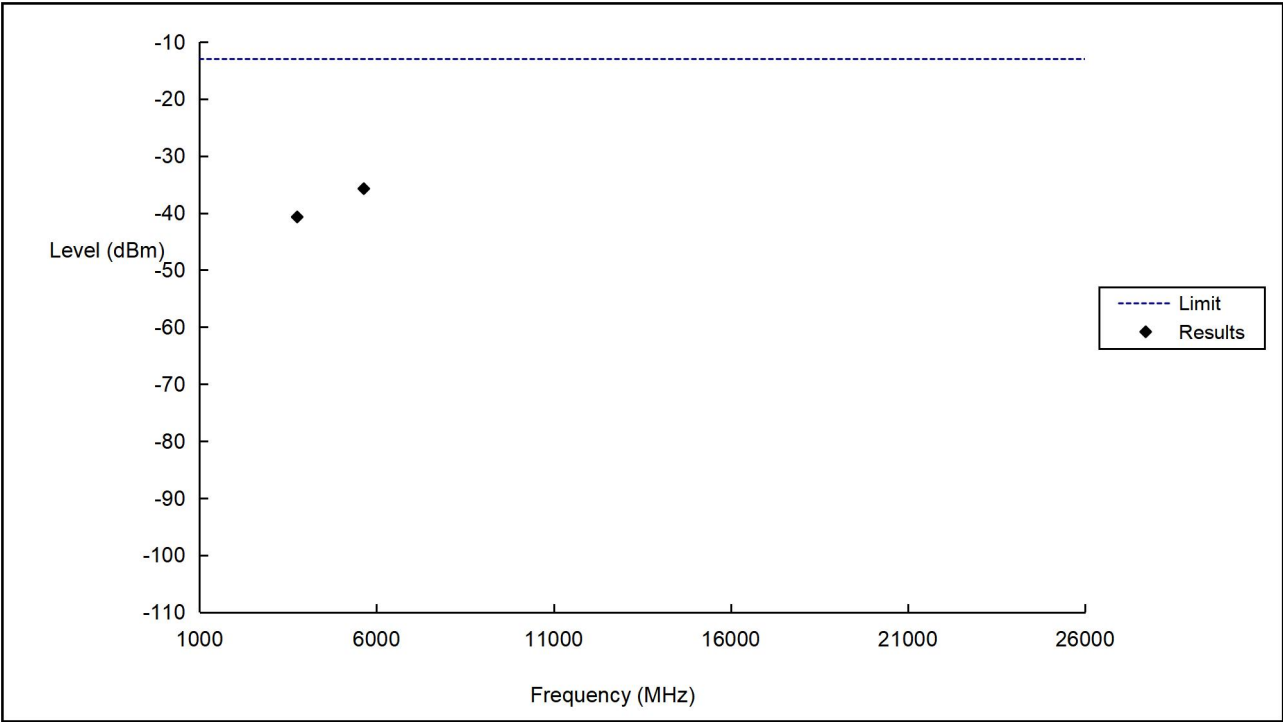


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3760.00	-40.69	-13	-27.69	RMS
2	5640.00	-35.73	-13	-22.73	RMS

Test mode:	Middle Channel (1880.0MHz)	Polarity:	Vertical
------------	----------------------------	-----------	----------

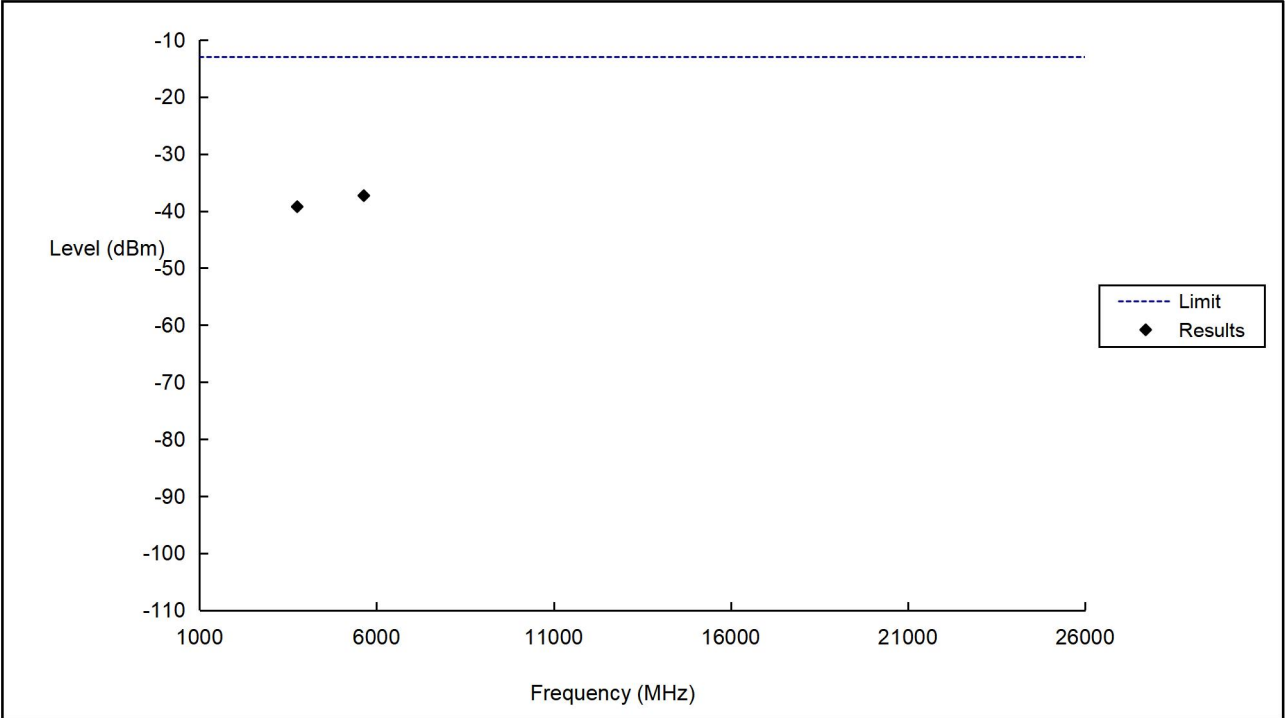


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3760.00	-39.24	-13	-26.24	RMS
2	5640.00	-37.30	-13	-24.30	RMS

Test mode:	High Channel (1907.5MHz)	Polarity:	Horizontal
------------	--------------------------	-----------	------------

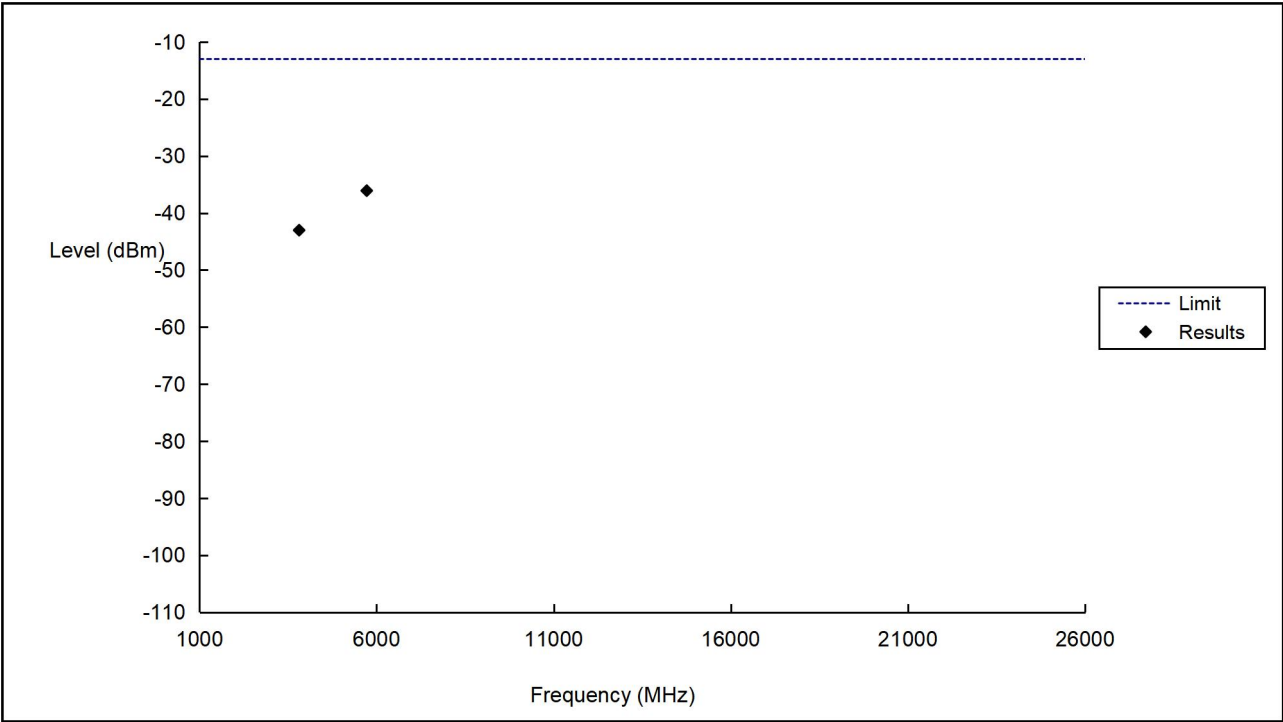

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3815.00	-43.01	-13	-30.01	RMS
2	5722.50	-36.08	-13	-23.08	RMS


Test mode:	High Channel (1907.5MHz)	Polarity:	Vertical
------------	--------------------------	-----------	----------

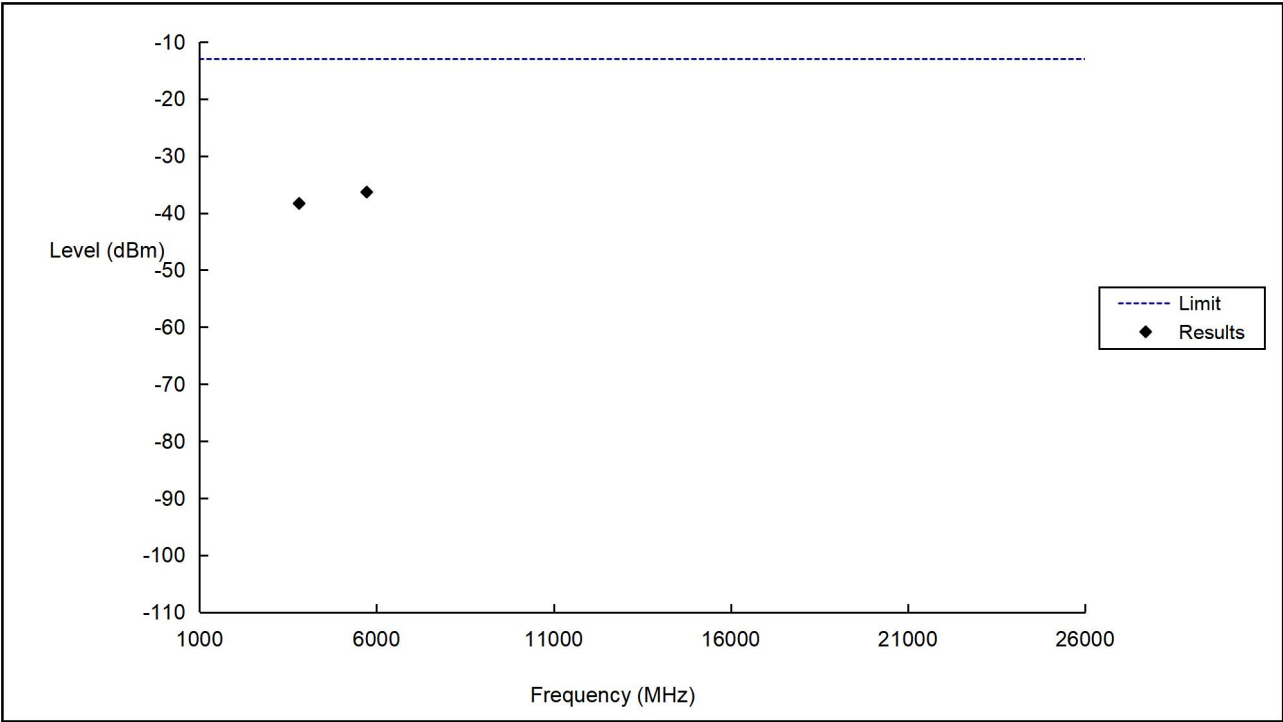

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3815.00	-38.32	-13	-25.32	RMS
2	5722.50	-36.33	-13	-23.33	RMS


For FDD_LTE Band 4 Mode

Test mode:	Low Channel (1712.5MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

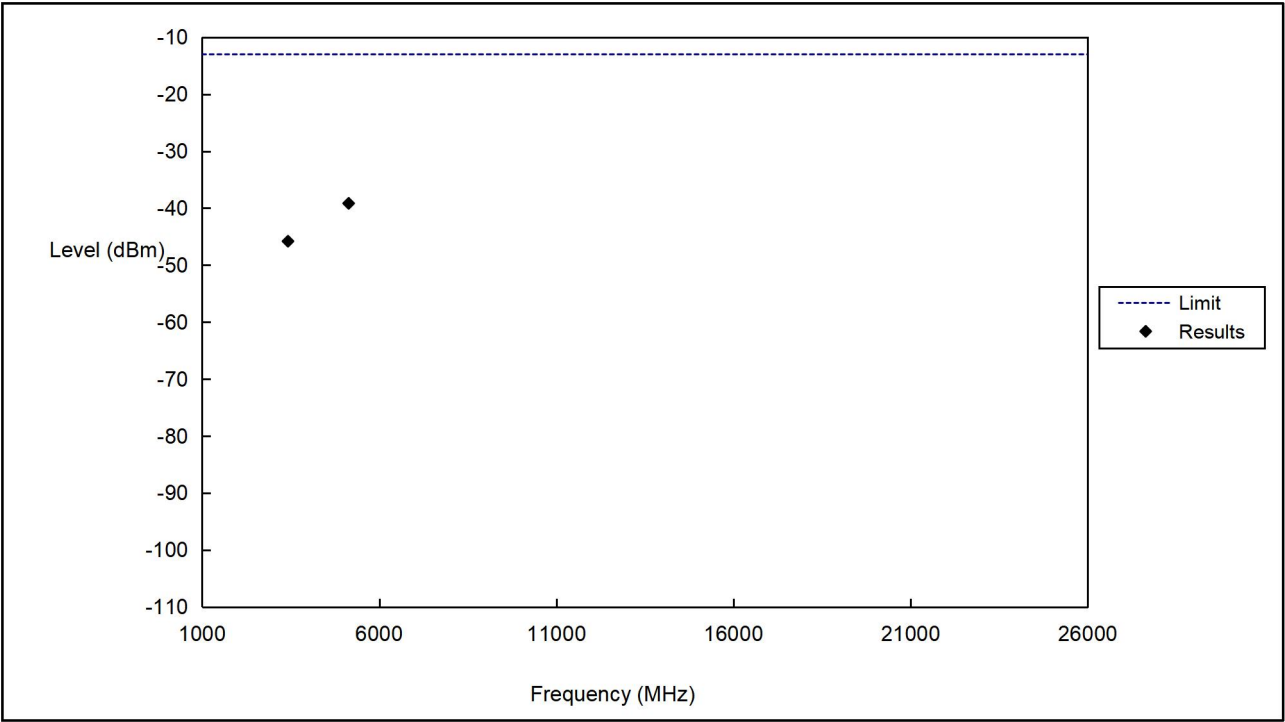


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3425.00	-45.82	-13	-32.82	RMS
2	5137.50	-39.17	-13	-26.17	RMS

Test mode:	Low Channel (1712.5MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

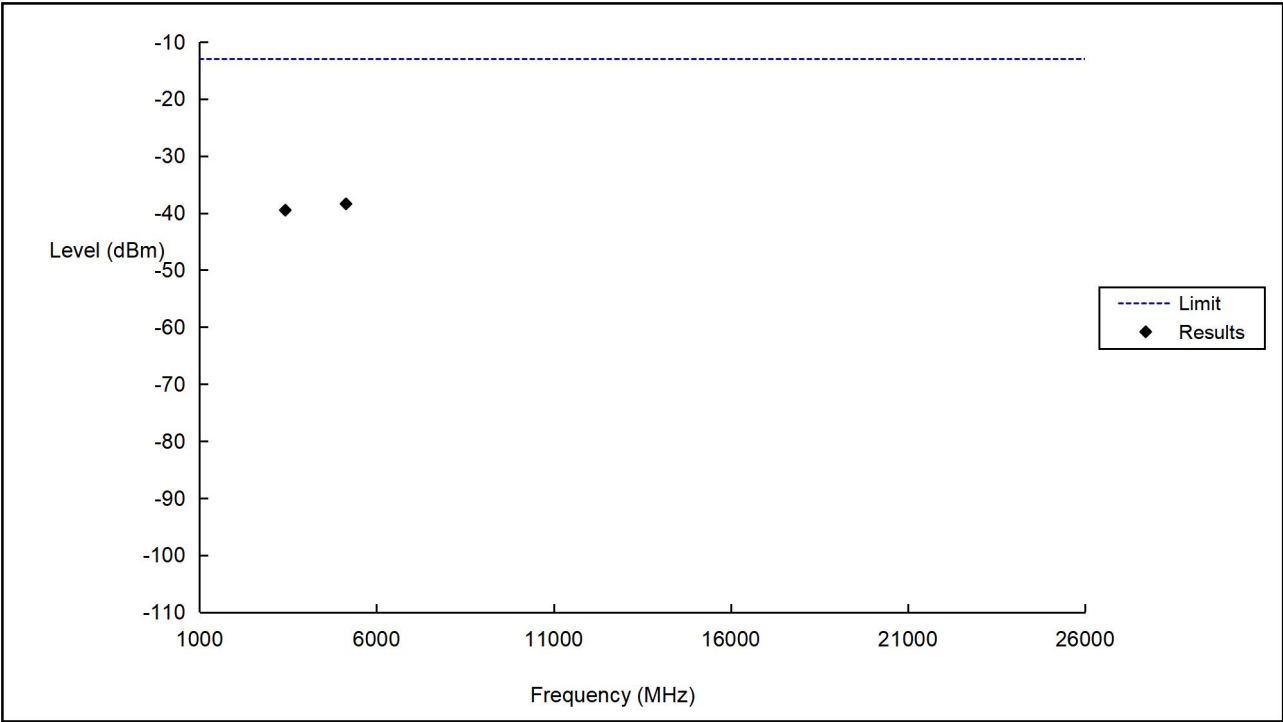


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3425.00	-39.50	-13	-26.50	RMS
2	5137.50	-38.39	-13	-25.39	RMS

Test mode:	Middle Channel (1732.5MHz)	Polarity:	Horizontal
------------	----------------------------	-----------	------------

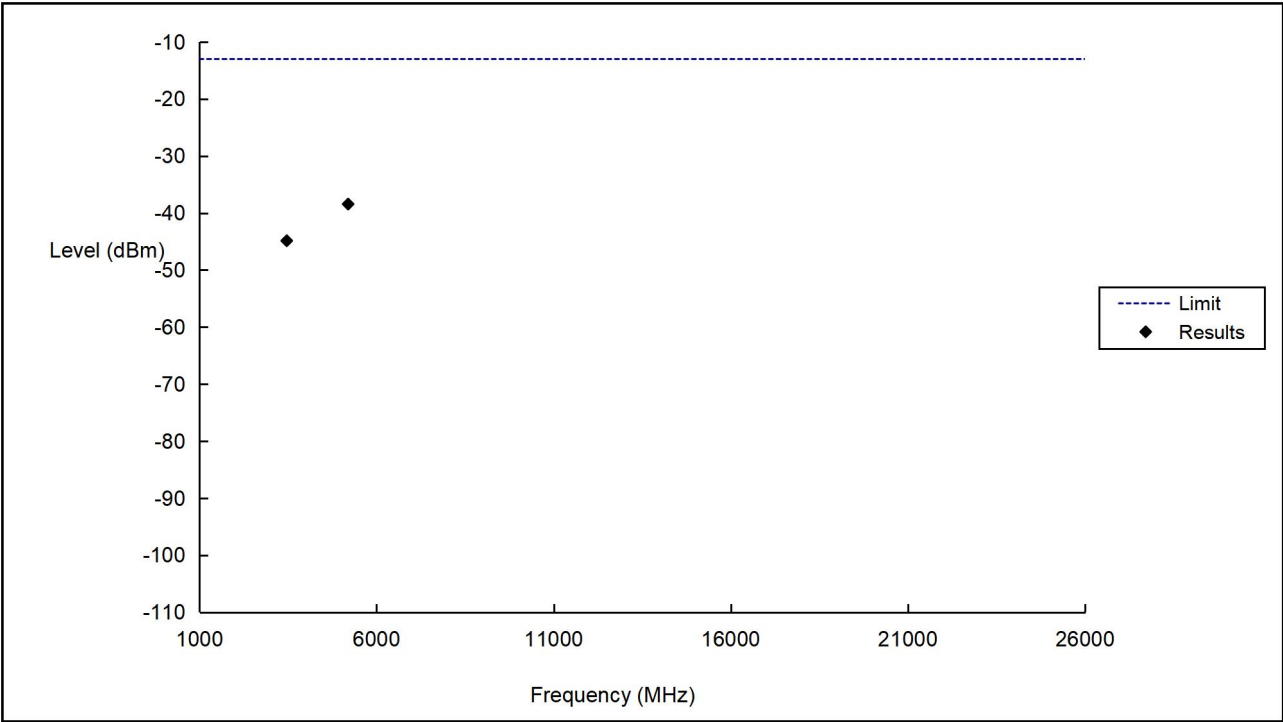


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3465.00	-44.86	-13	-31.86	RMS
2	5197.50	-38.43	-13	-25.43	RMS

Test mode:	Middle Channel (1732.5MHz)	Polarity:	Vertical
------------	----------------------------	-----------	----------

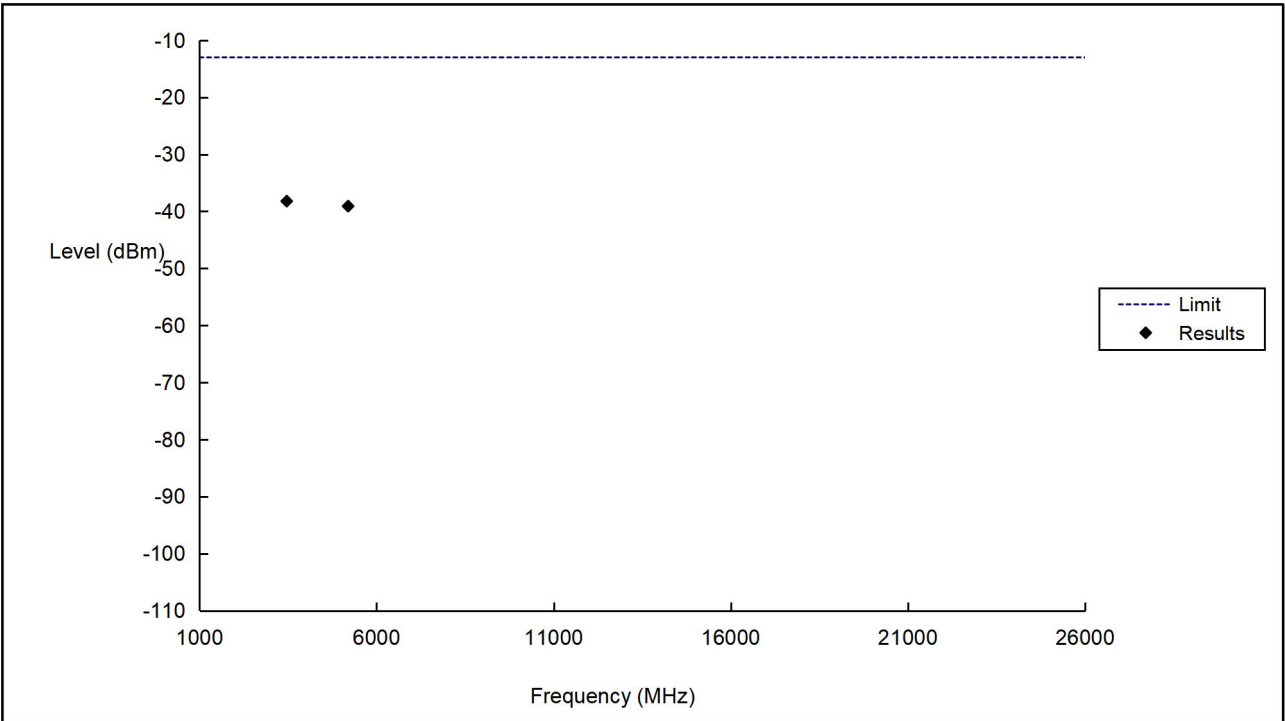


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3465.00	-38.22	-13	-25.22	RMS
2	5197.50	-39.09	-13	-26.09	RMS

Test mode:	High Channel (1752.5MHz)	Polarity:	Horizontal
------------	--------------------------	-----------	------------

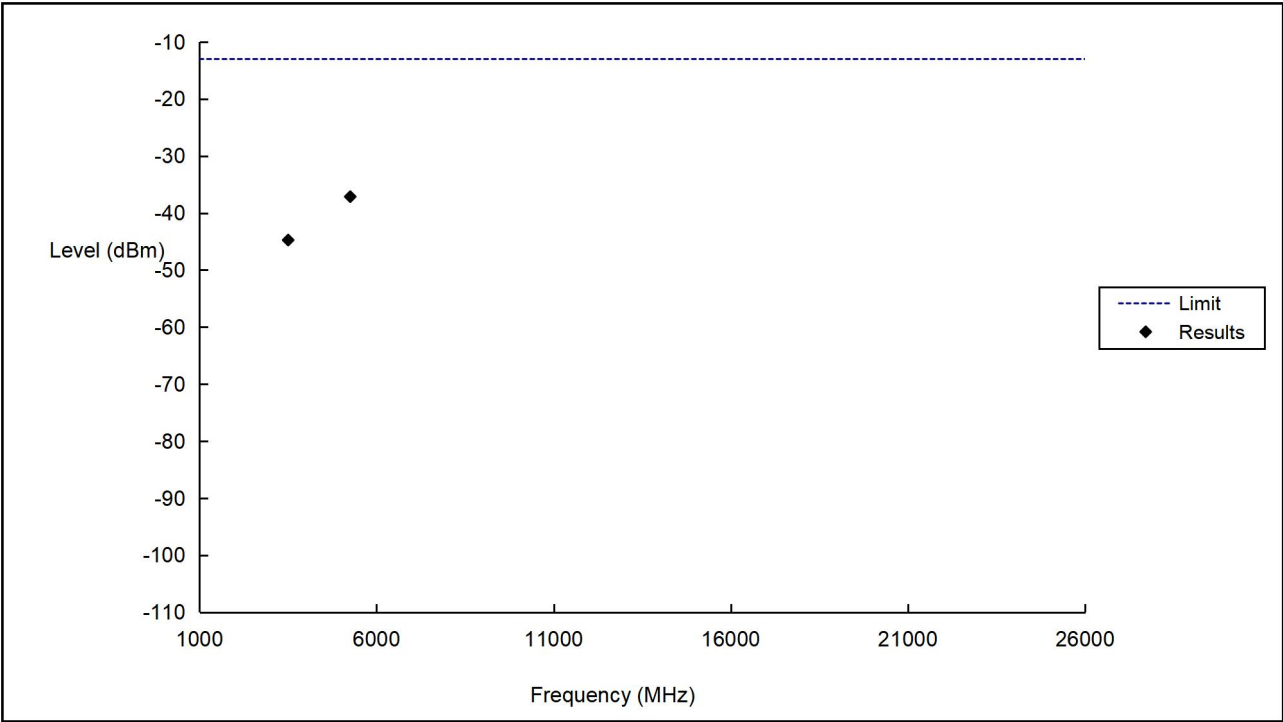

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3505.00	-44.74	-13	-31.74	RMS
2	5257.50	-37.13	-13	-24.13	RMS


Test mode:	High Channel (1752.5MHz)	Polarity:	Vertical
------------	--------------------------	-----------	----------

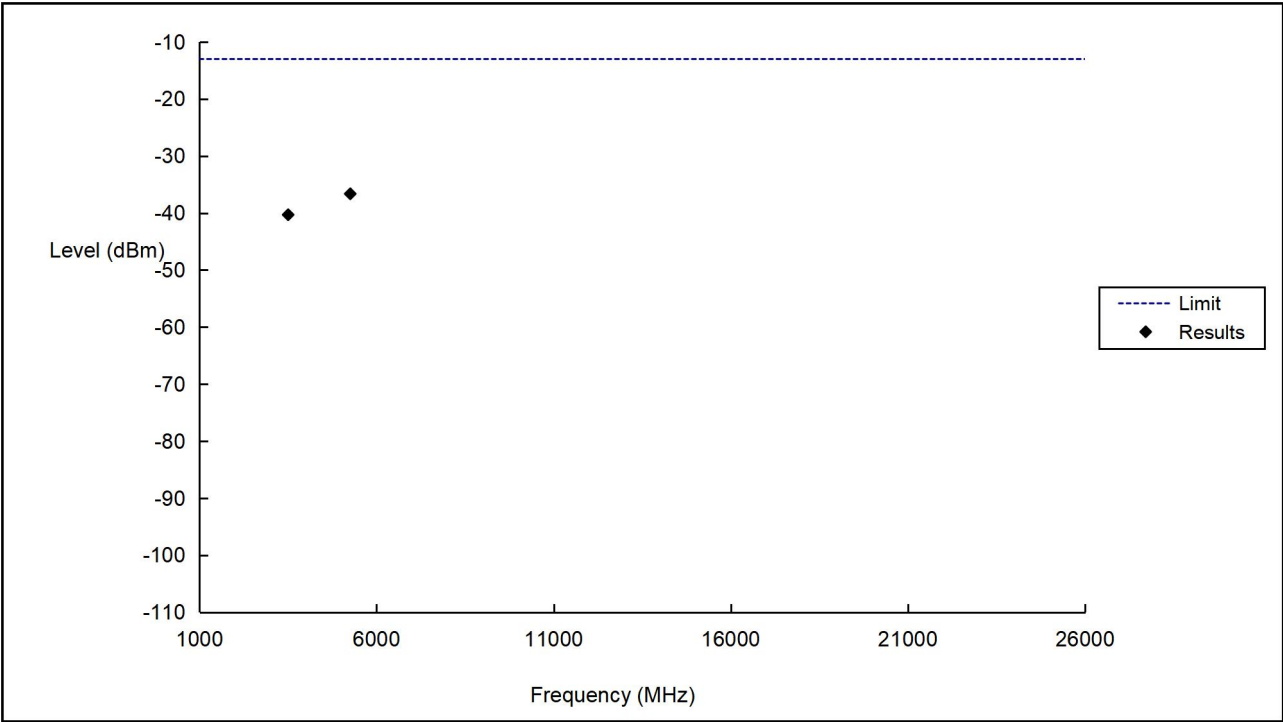

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3505.00	-40.30	-13	-27.30	RMS
2	5257.50	-36.63	-13	-23.63	RMS


For FDD_LTE Band 5 Mode

Test mode:	Low Channel (824.7MHz)	Polarity:	Horizontal
------------	------------------------	-----------	------------

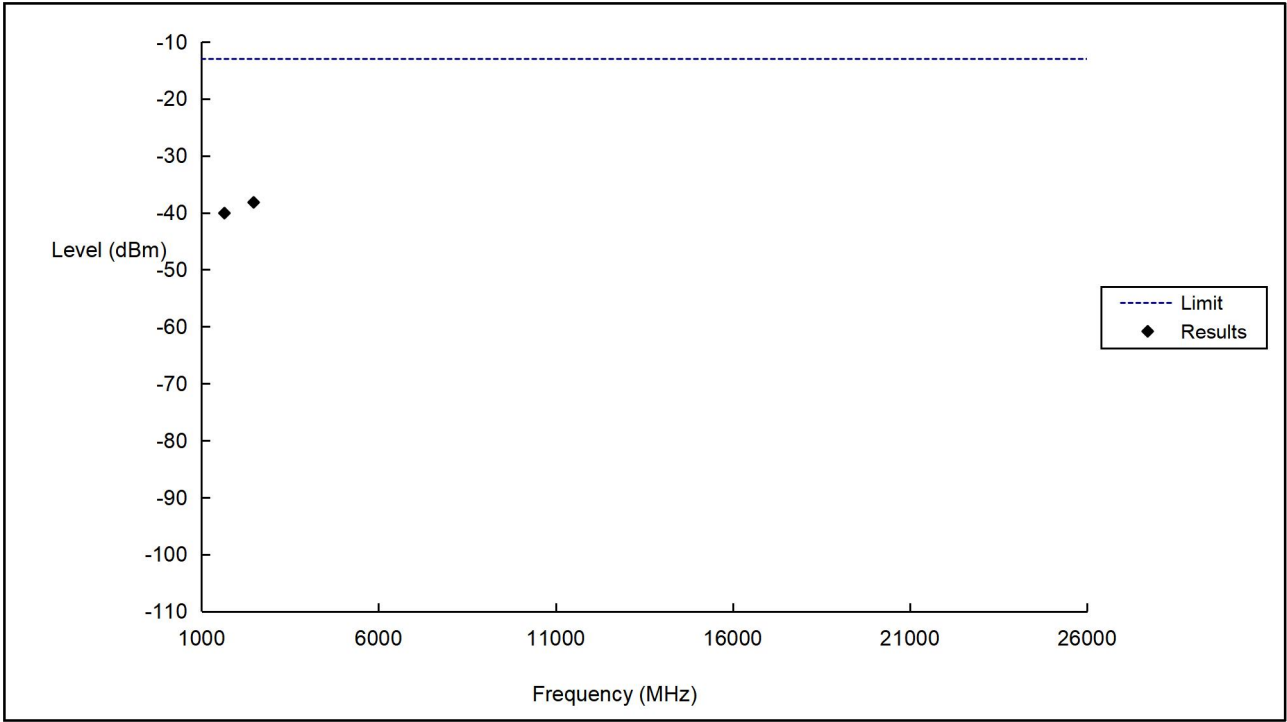


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1649.40	-40.07	-13	-27.07	RMS
2	2474.10	-38.18	-13	-25.18	RMS

Test mode:	Low Channel (824.7MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

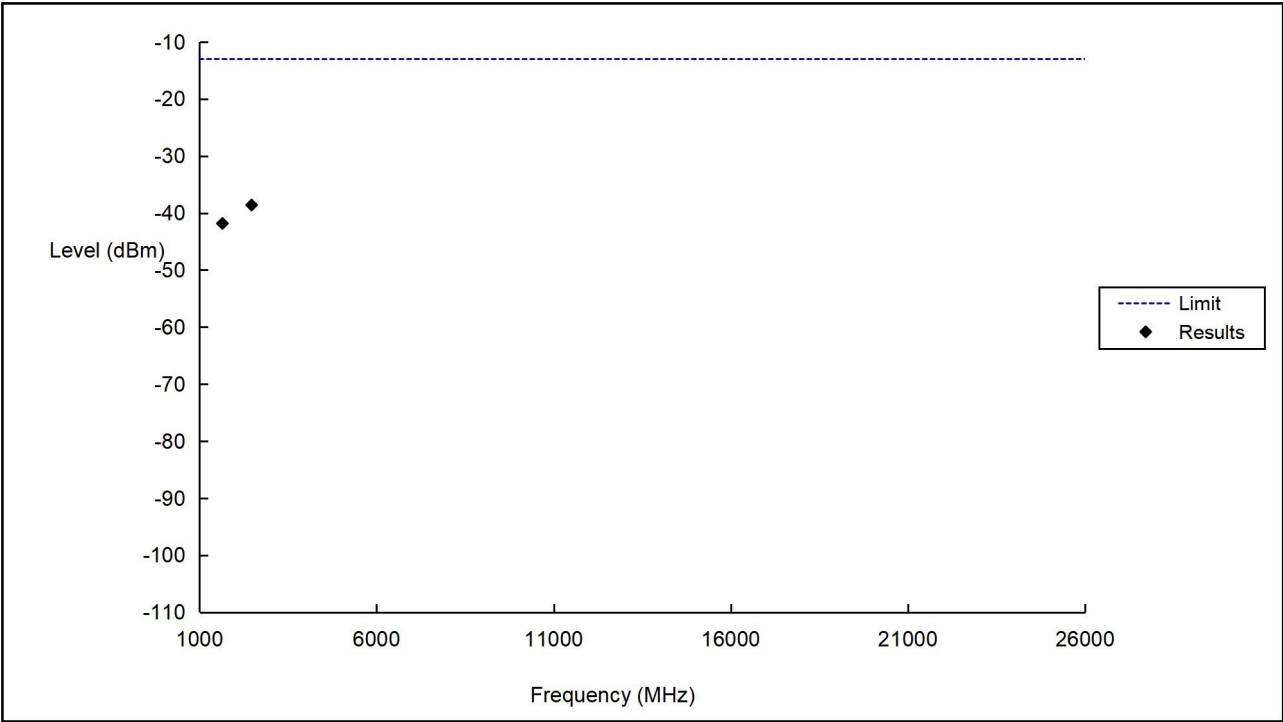


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1649.40	-41.82	-13	-28.82	RMS
2	2474.10	-38.60	-13	-25.60	RMS

Test mode:	Middle Channel (836.5MHz)	Polarity:	Horizontal
------------	---------------------------	-----------	------------

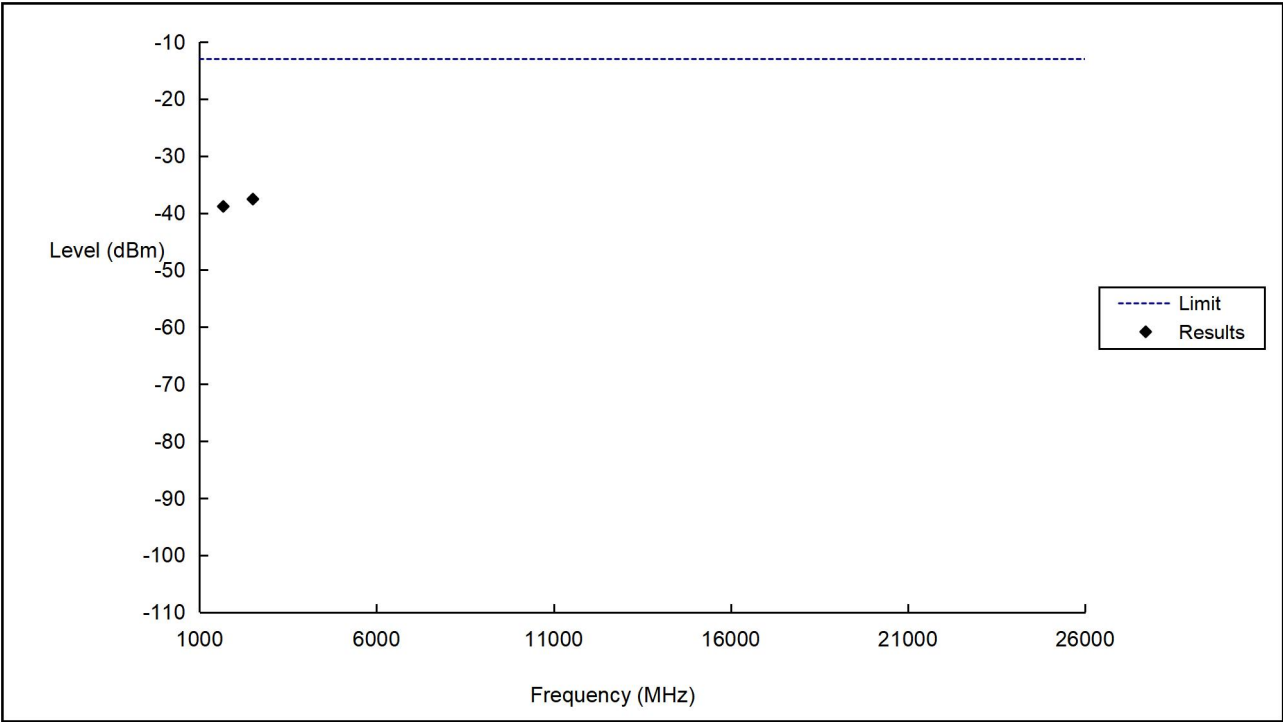


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1673.00	-38.84	-13	-25.84	RMS
2	2509.50	-37.56	-13	-24.56	RMS

Test mode:	Middle Channel (836.5MHz)	Polarity:	Vertical
------------	---------------------------	-----------	----------

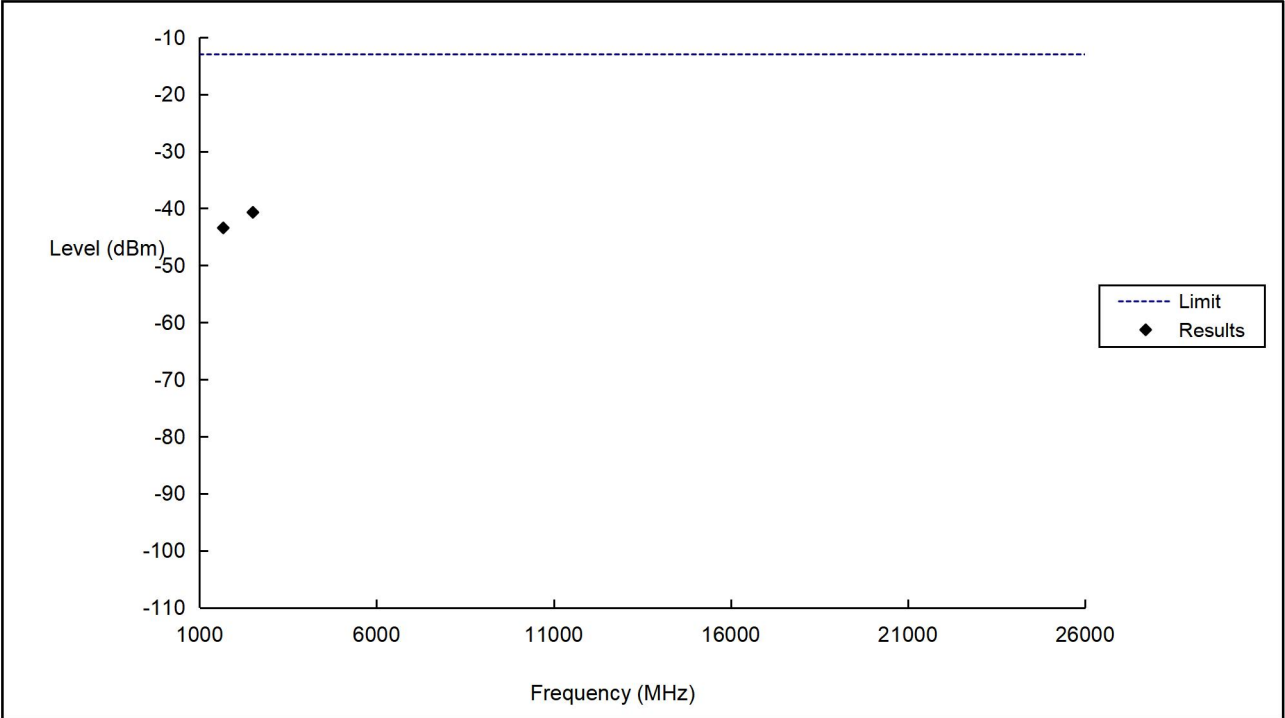


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1673.00	-43.43	-13	-30.43	RMS
2	2509.50	-40.70	-13	-27.70	RMS

Test mode:	High Channel (848.3MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

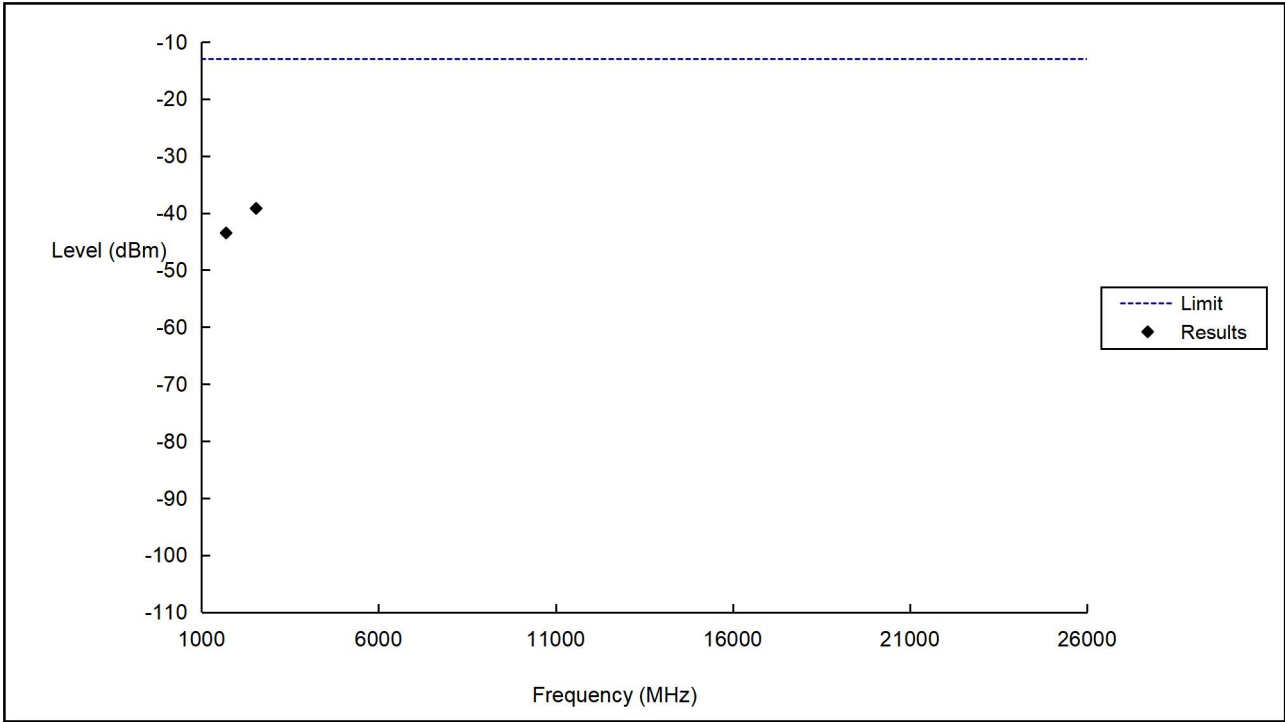

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1696.60	-43.50	-13	-30.50	RMS
2	2544.90	-39.19	-13	-26.19	RMS


Test mode:	High Channel (848.3MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

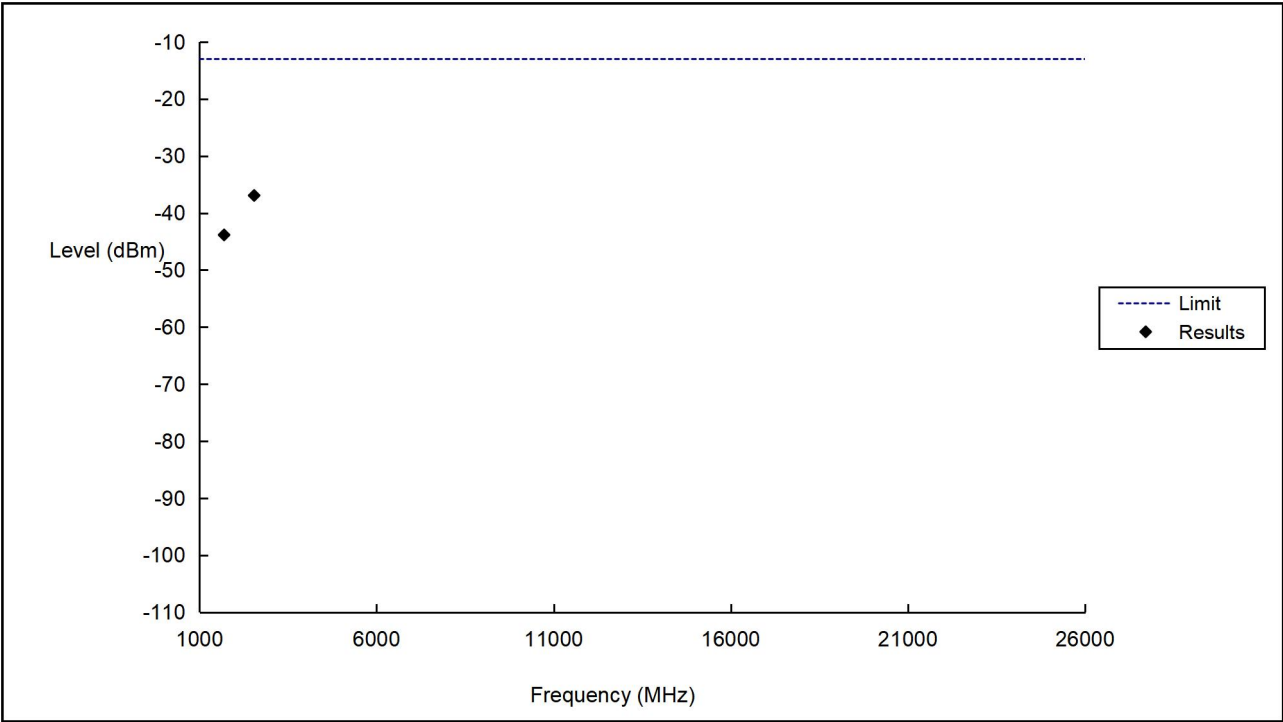

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1696.60	-43.84	-13	-30.84	RMS
2	2544.90	-36.92	-13	-23.92	RMS


For FDD_LTE Band 12 Mode

Test mode:	Low Channel (699.7MHz)	Polarity:	Horizontal
------------	------------------------	-----------	------------

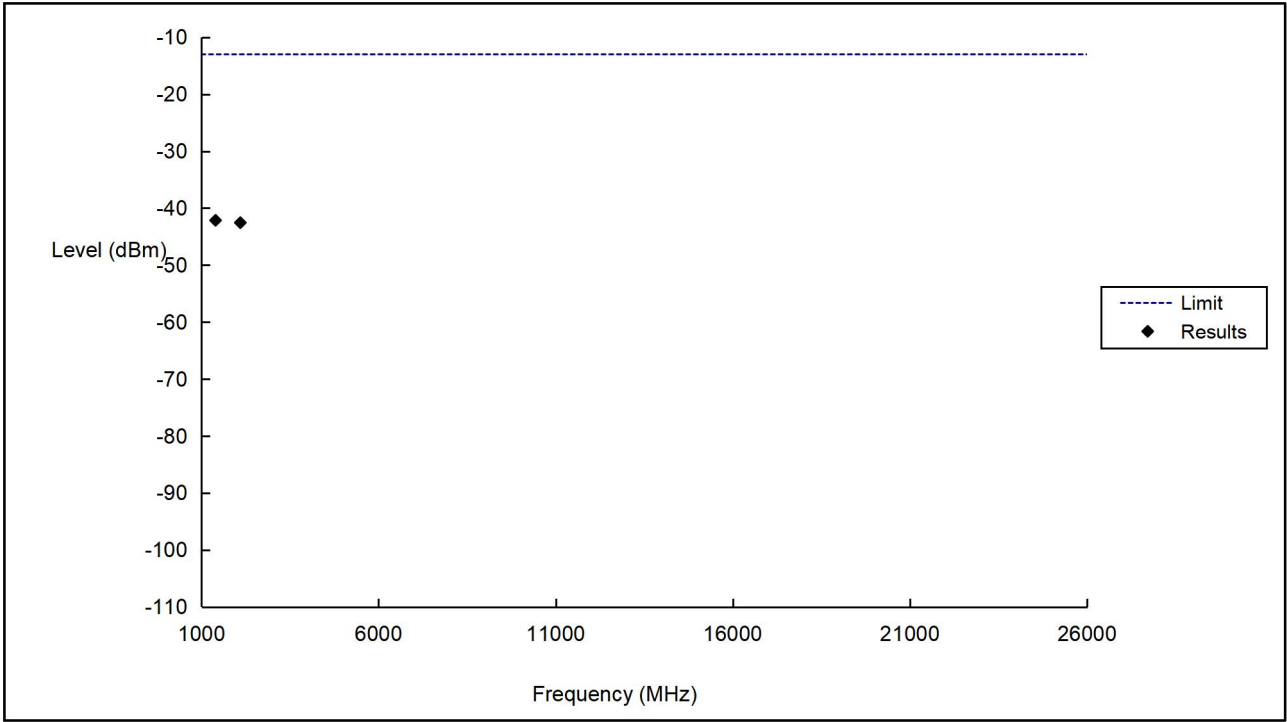


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1399.40	-43.58	-13	-30.58	RMS
2	2099.10	-43.91	-13	-30.91	RMS

Test mode:	Low Channel (699.7MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

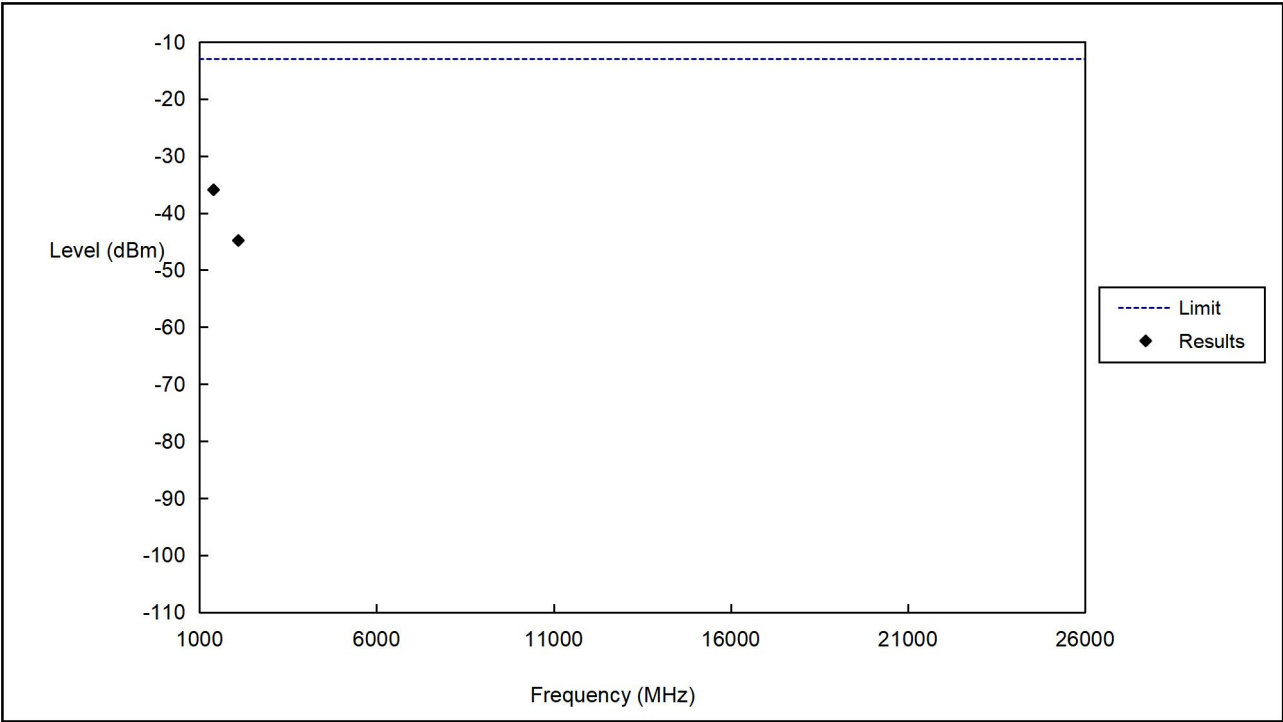


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1399.40	-42.97	-13	-29.97	RMS
2	2099.10	-45.44	-13	-32.44	RMS

Test mode:	Middle Channel (707.5MHz)	Polarity:	Horizontal
------------	---------------------------	-----------	------------

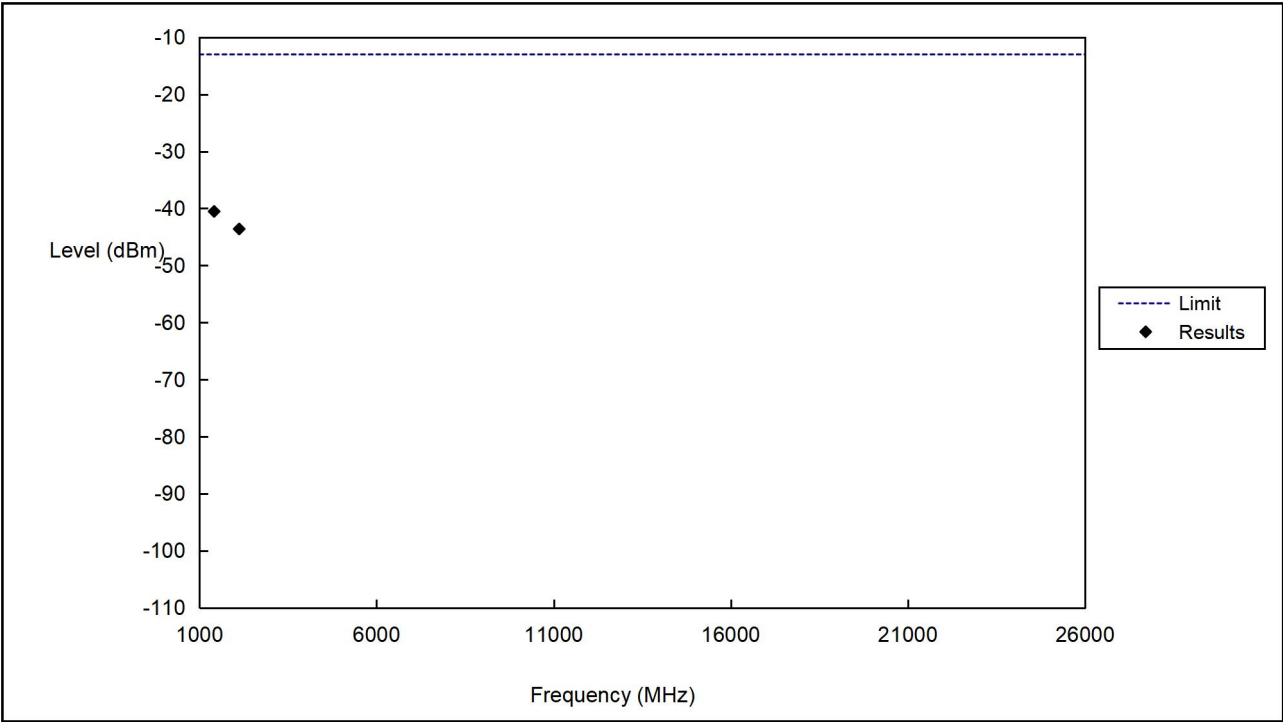


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1415.00	-40.53	-13	-27.53	RMS
2	2122.50	-43.61	-13	-30.61	RMS

Test mode:	Middle Channel (707.5MHz)	Polarity:	Vertical
------------	---------------------------	-----------	----------

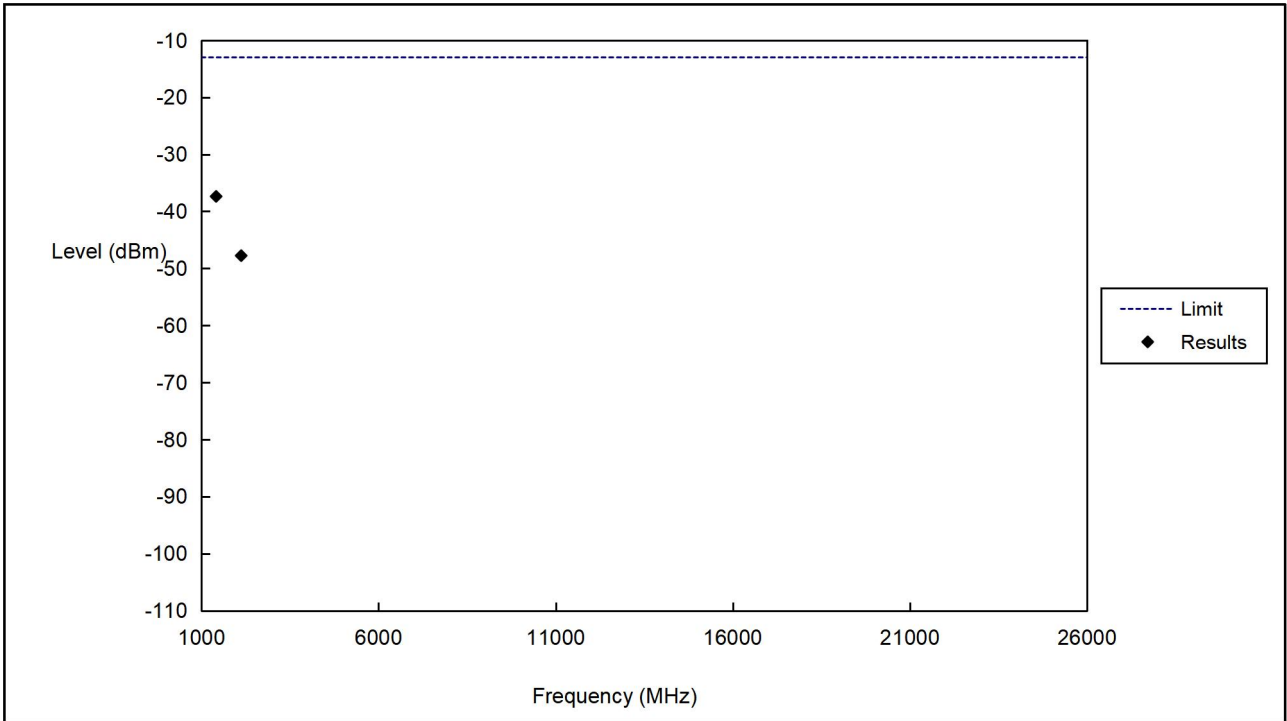


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1415.00	-37.38	-13	-24.38	RMS
2	2122.50	-47.77	-13	-34.77	RMS

Test mode:	High Channel (715.3MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

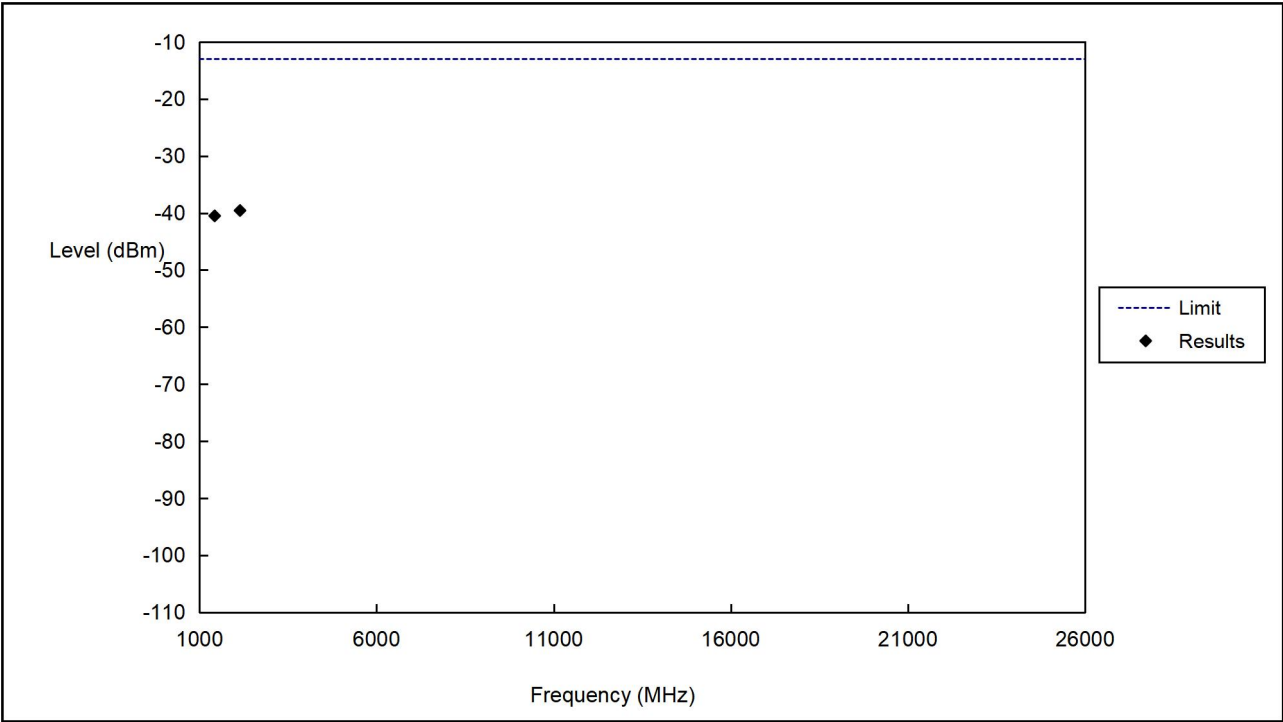

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1430.60	-40.50	-13	-27.50	RMS
2	2145.90	-39.56	-13	-26.56	RMS


Test mode:	High Channel (715.3MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

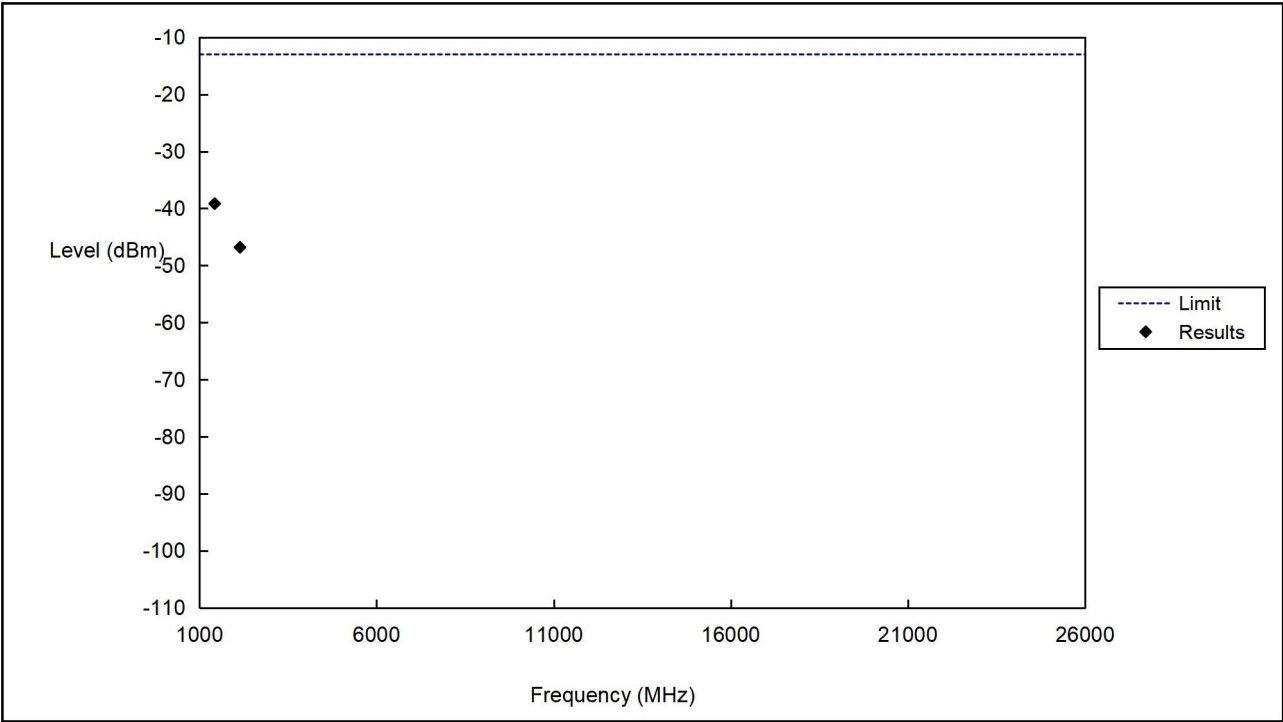

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1430.60	-39.17	-13	-26.17	RMS
2	2145.90	-46.83	-13	-33.83	RMS


For FDD_LTE Band 13 Mode

Test mode:	Low Channel (779.5MHz)	Polarity:	Horizontal
------------	------------------------	-----------	------------

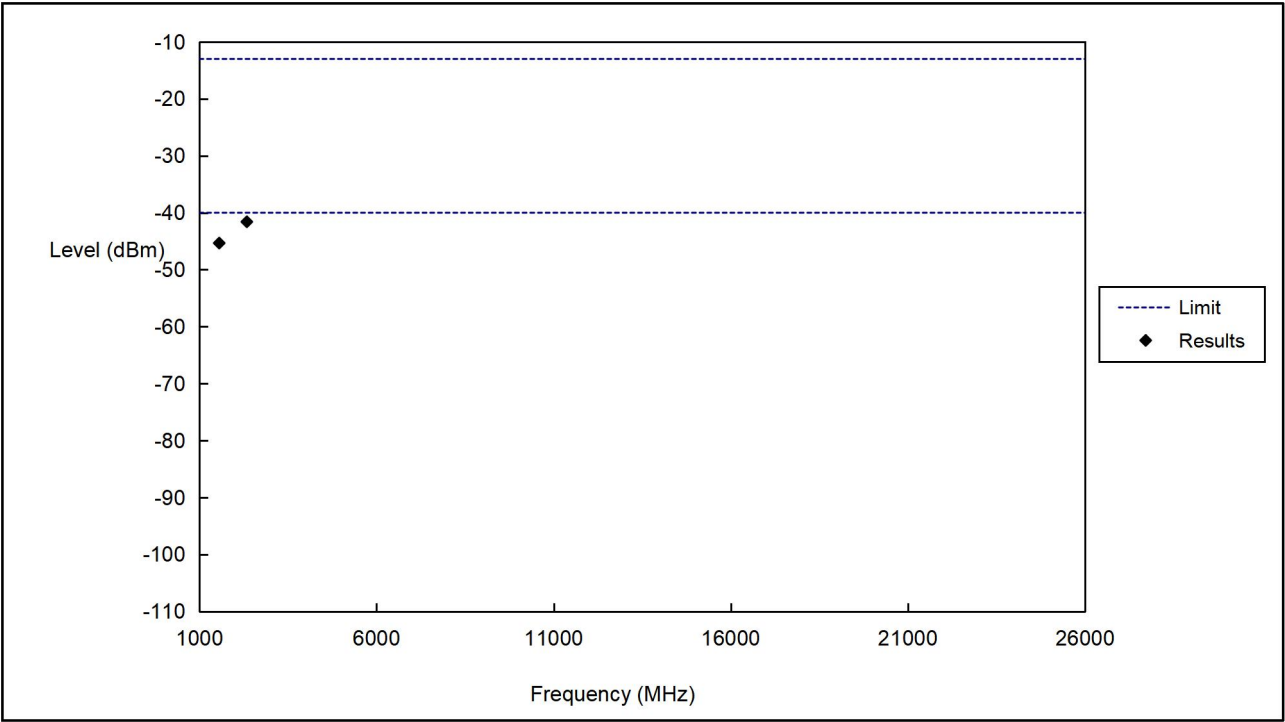


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1559.00	-45.33	-40	-5.33	RMS
2	2338.50	-41.59	-13	-28.59	RMS

Test mode:	Low Channel (779.5MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

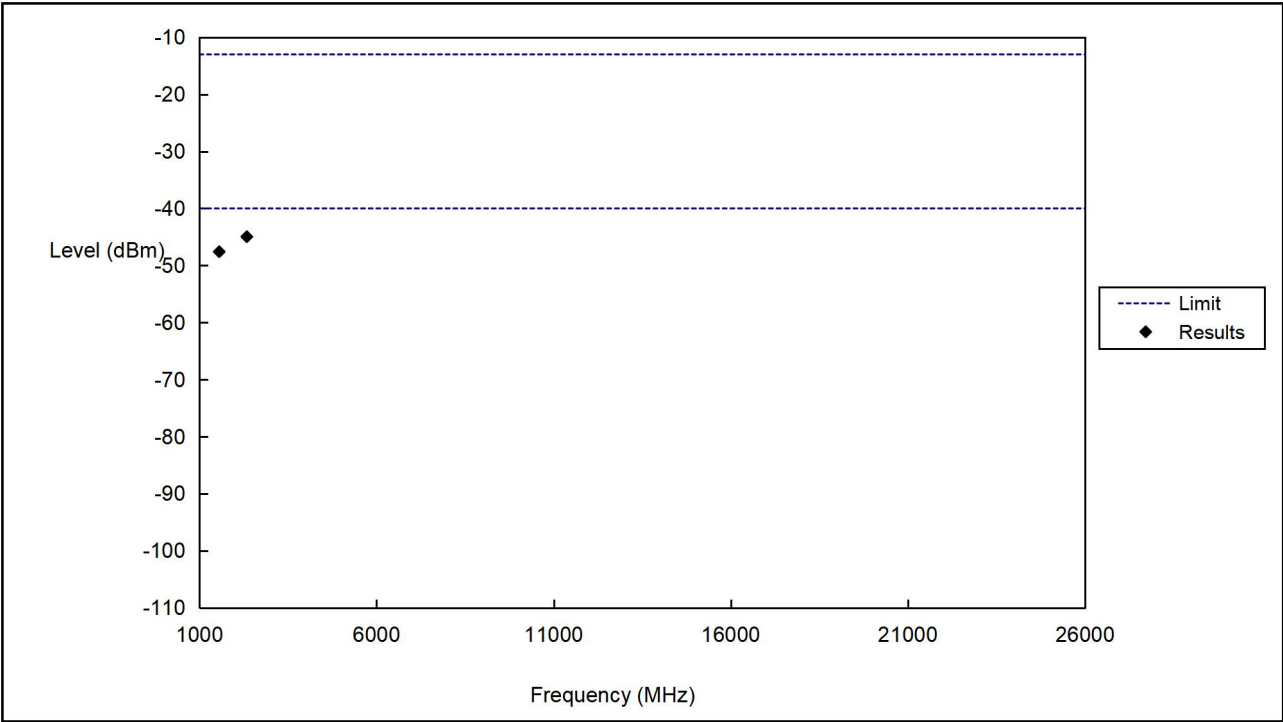


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1559.00	-47.60	-40	-7.60	RMS
2	2338.50	-44.97	-13	-31.97	RMS

Test mode:	Middle Channel (782.0MHz)	Polarity:	Horizontal
------------	---------------------------	-----------	------------

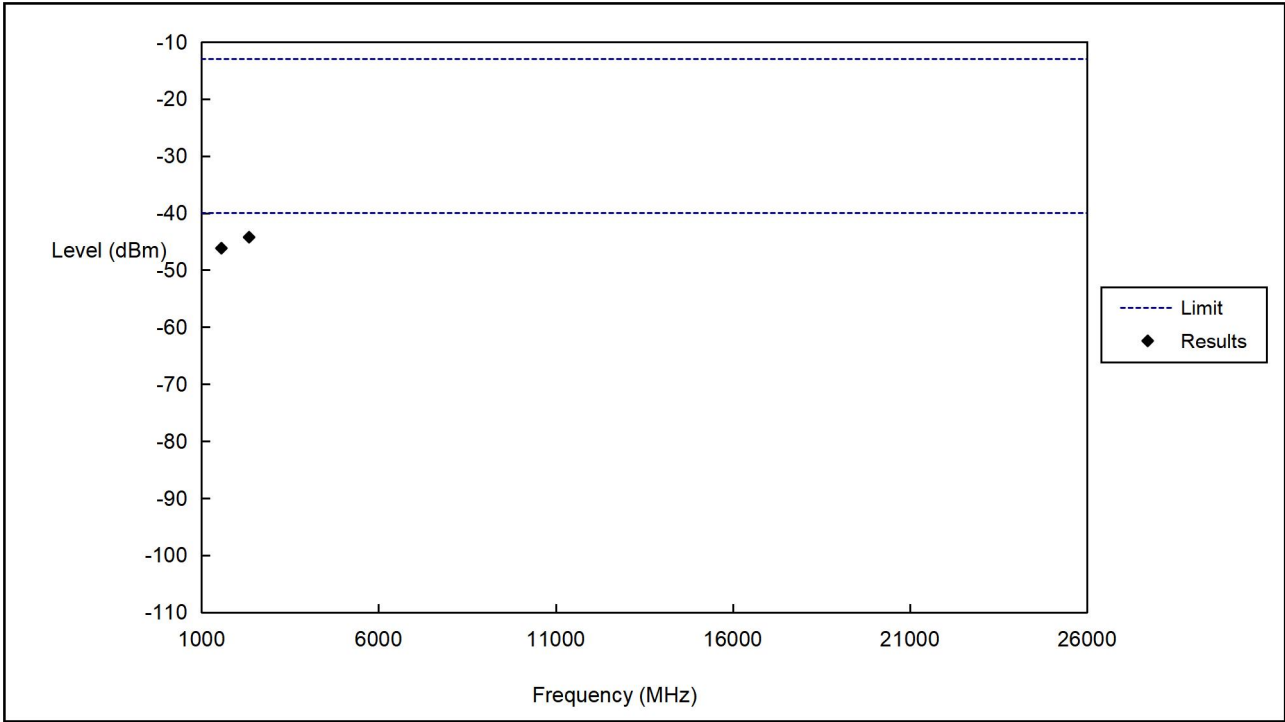


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1564.00	-46.17	-40	-6.17	RMS
2	2346.00	-44.24	-13	-31.24	RMS

Test mode:	Middle Channel (782.0MHz)	Polarity:	Vertical
------------	---------------------------	-----------	----------

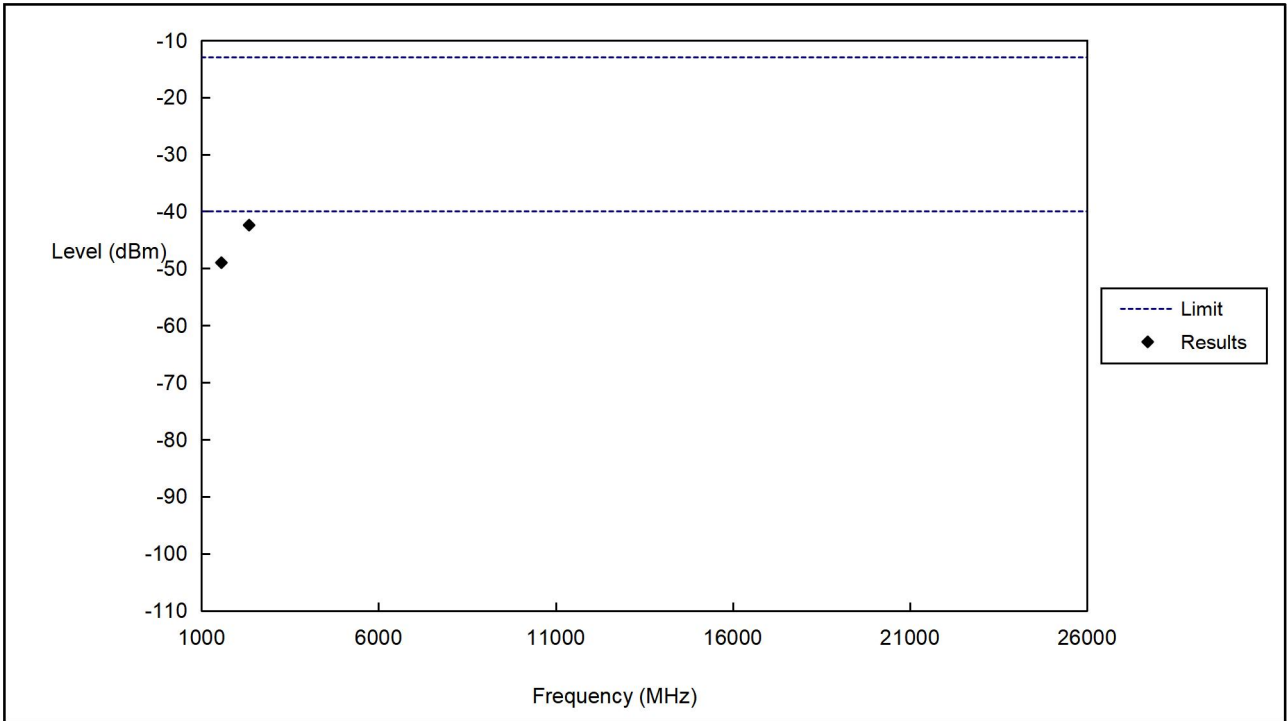


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1564.00	-49.00	-40	-9.00	RMS
2	2346.00	-42.42	-13	-29.42	RMS

Test mode:	High Channel (784.5MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

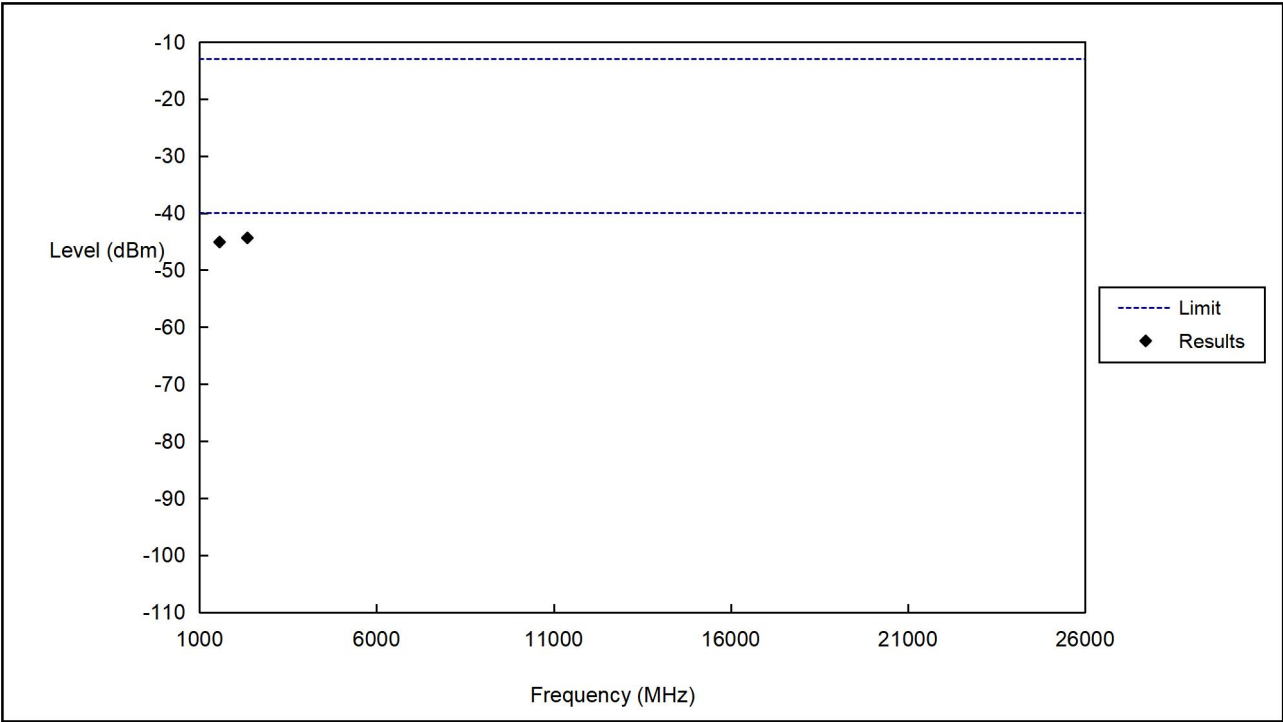

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1569.00	-45.09	-40	-5.09	RMS
2	2353.50	-44.36	-13	-31.36	RMS


Test mode:	High Channel (784.5MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

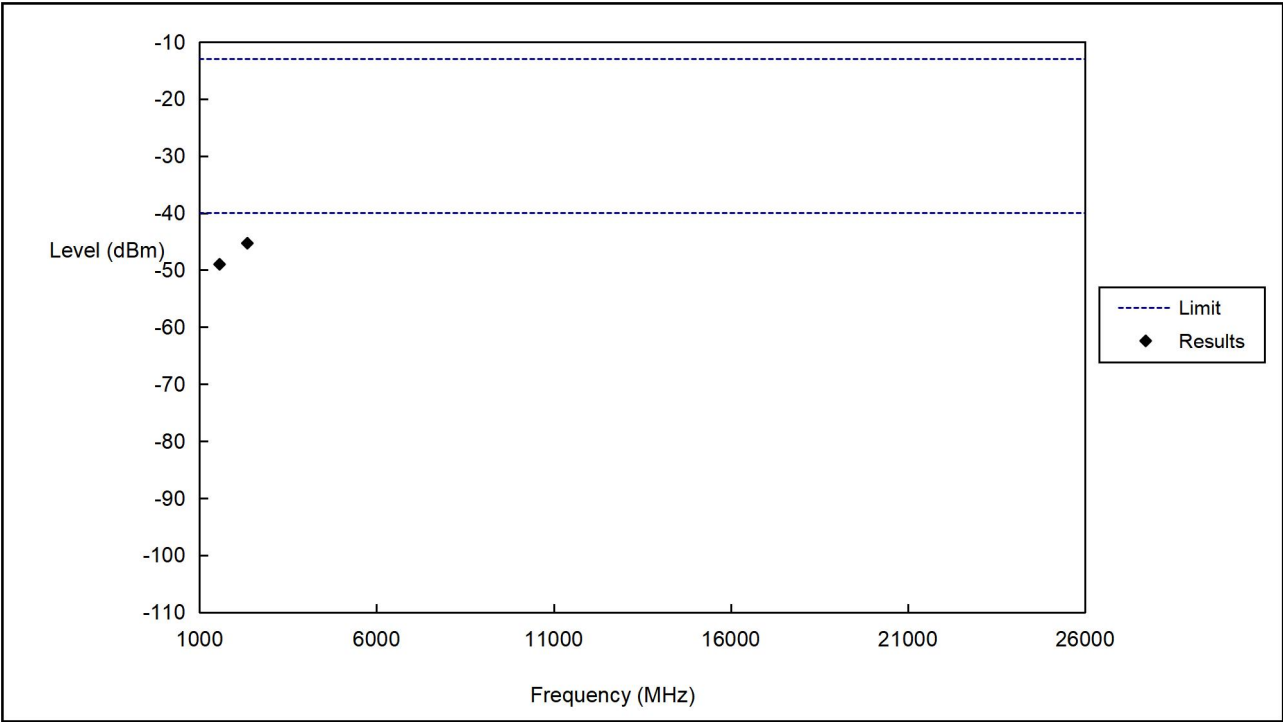

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1569.00	-48.99	-40	-8.99	RMS
2	2353.50	-45.30	-13	-32.30	RMS


For FDD_LTE Band 17 Mode

Test mode:	Low Channel (706.5MHz)	Polarity:	Horizontal
------------	------------------------	-----------	------------

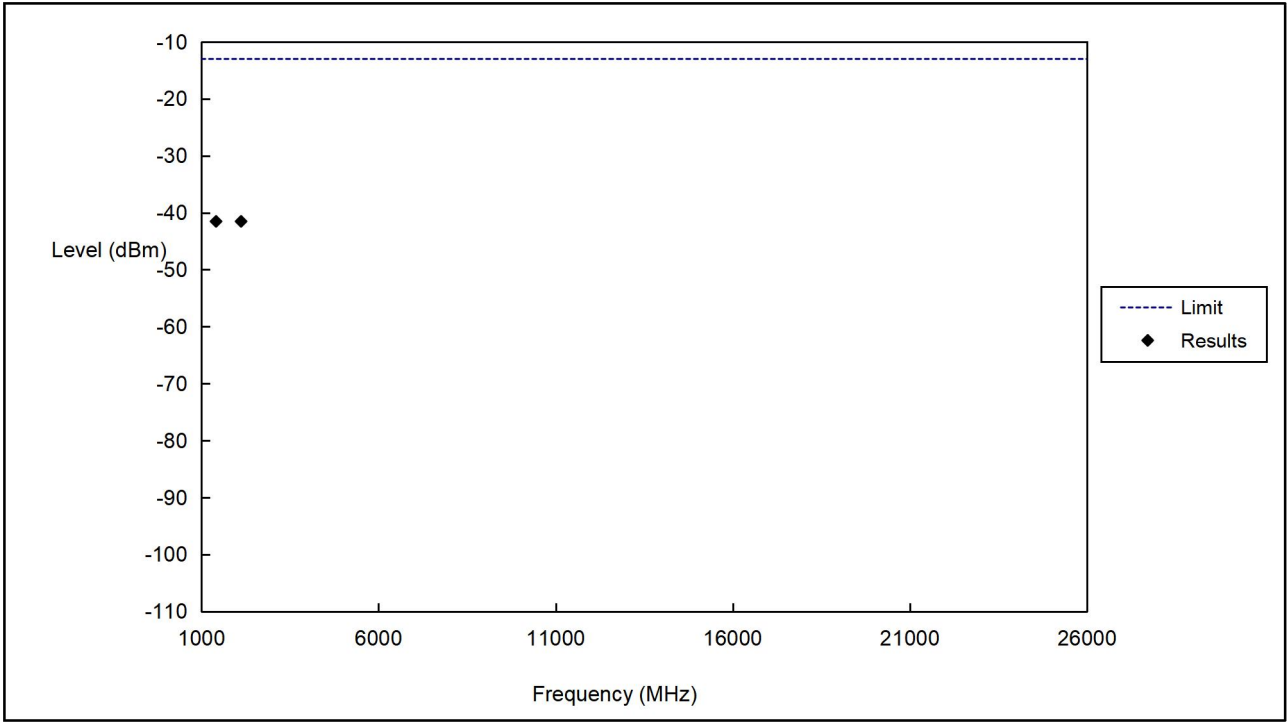


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1413.00	-41.52	-13	-28.52	RMS
2	2119.50	-41.52	-13	-28.52	RMS

Test mode:	Low Channel (706.5MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

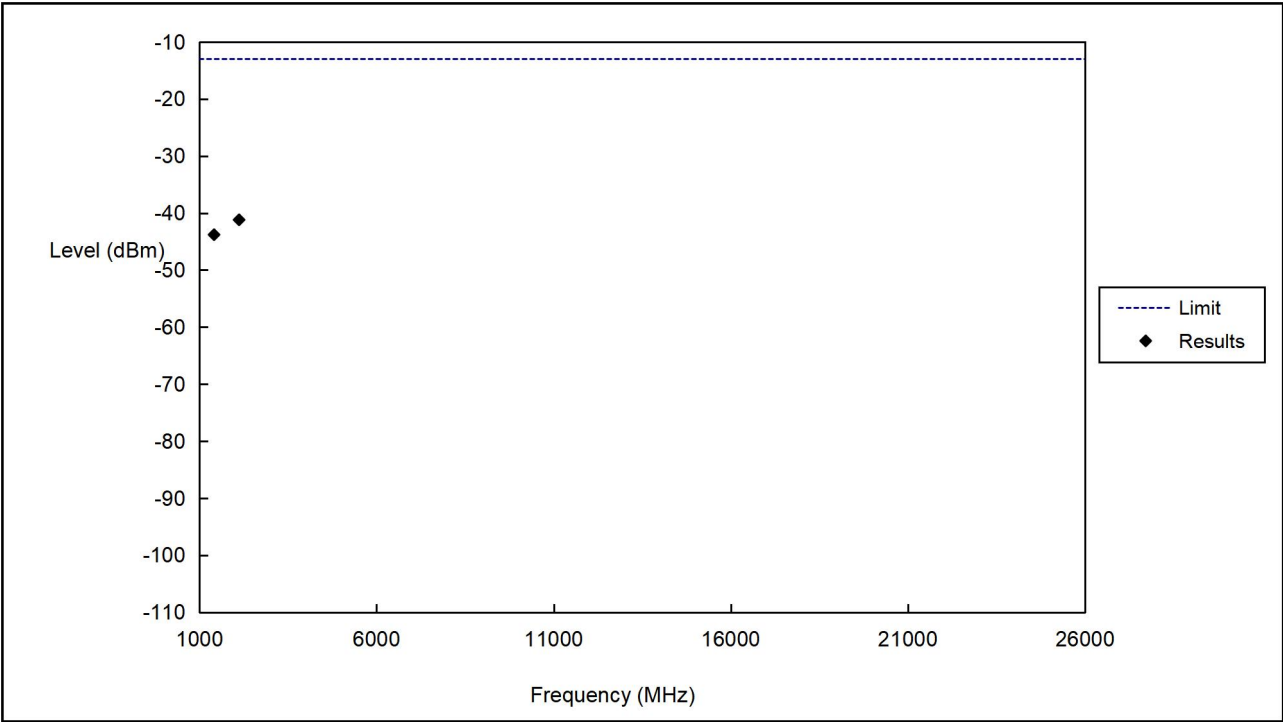


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1413.00	-43.80	-13	-30.80	RMS
2	2119.50	-41.19	-13	-28.19	RMS

Test mode:	Middle Channel (710.0MHz)	Polarity:	Horizontal
------------	---------------------------	-----------	------------

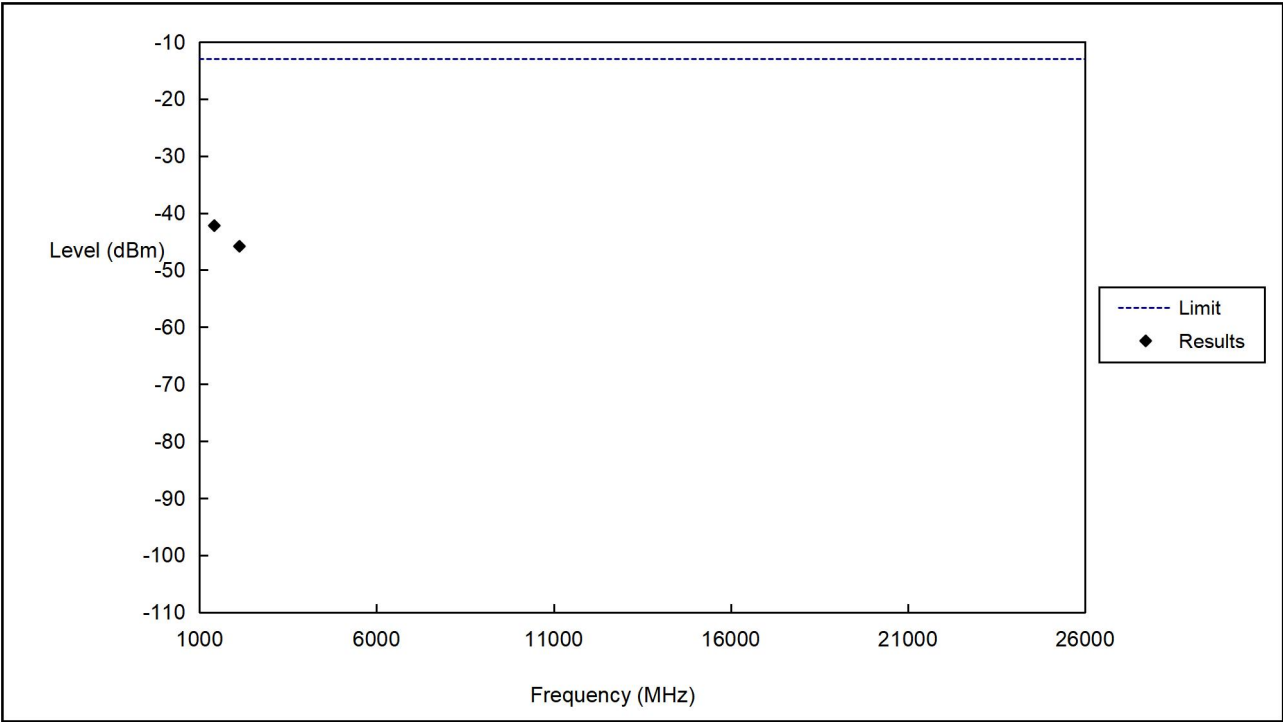


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1420.00	-42.21	-13	-29.21	RMS
2	2130.00	-45.83	-13	-32.83	RMS

Test mode:	Middle Channel (710.0MHz)	Polarity:	Vertical
------------	---------------------------	-----------	----------

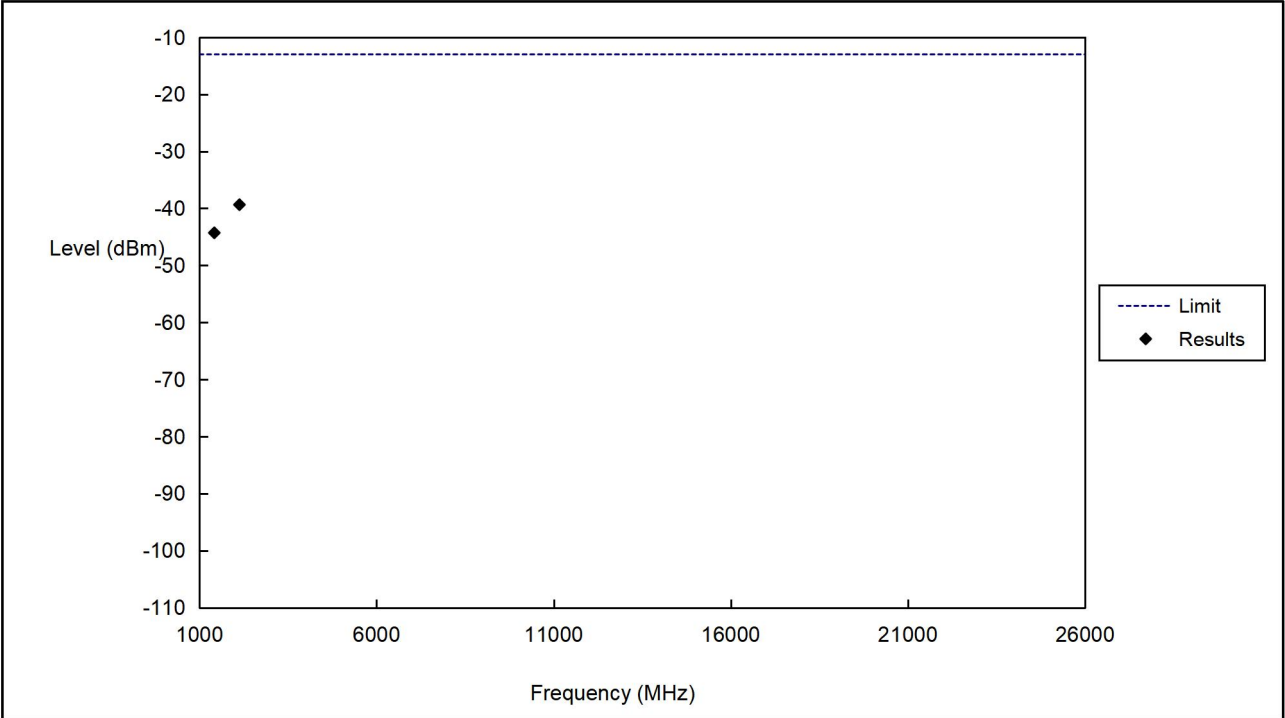


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1420.00	-44.29	-13	-31.29	RMS
2	2130.00	-39.36	-13	-26.36	RMS

Test mode:	High Channel (713.5MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

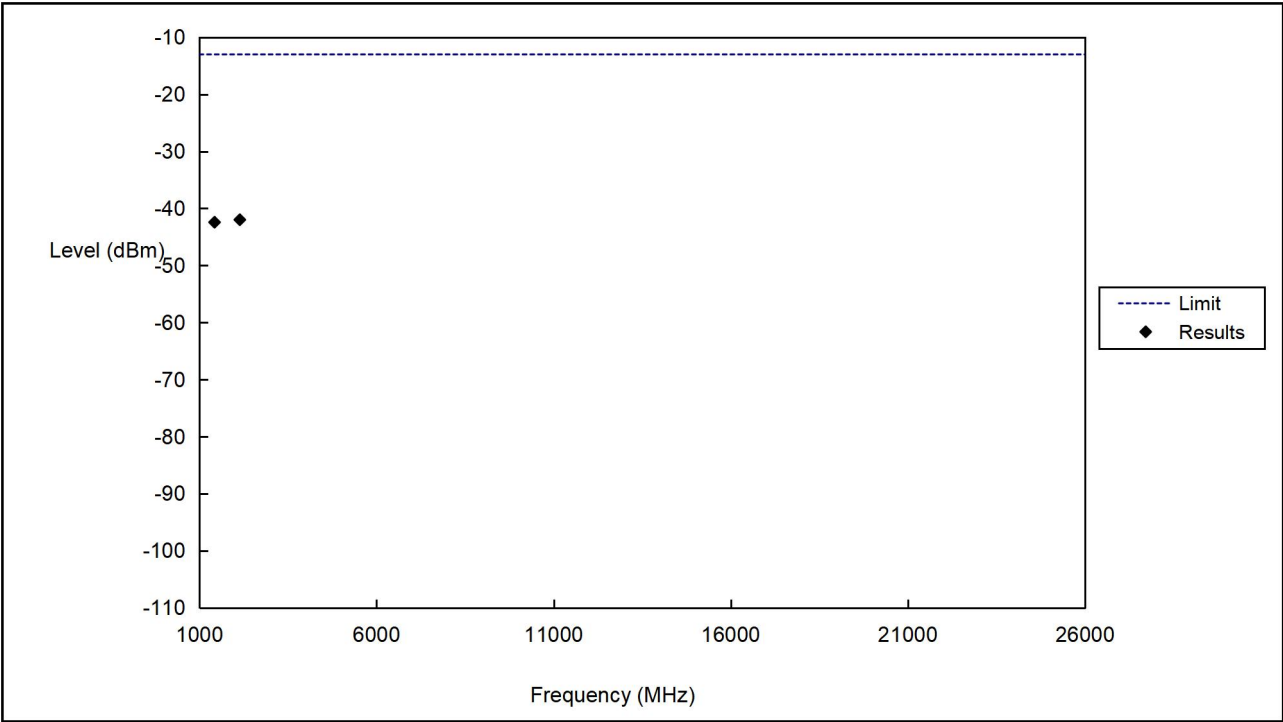

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1427.00	-42.43	-13	-29.43	RMS
2	2140.50	-41.99	-13	-28.99	RMS


Test mode:	High Channel (713.5MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

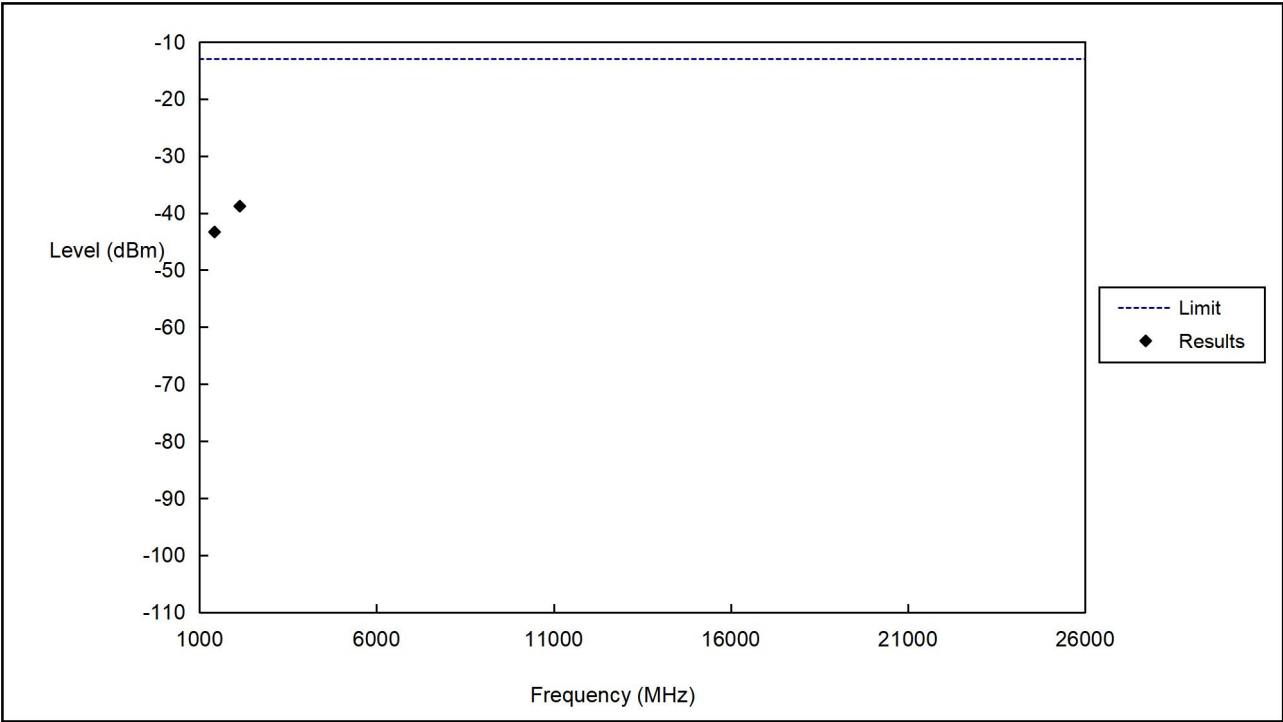

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1427.00	-43.33	-13	-30.33	RMS
2	2140.50	-38.80	-13	-25.80	RMS


For FDD_LTE Band 25 Mode

Test mode:	Low Channel (1850.7MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

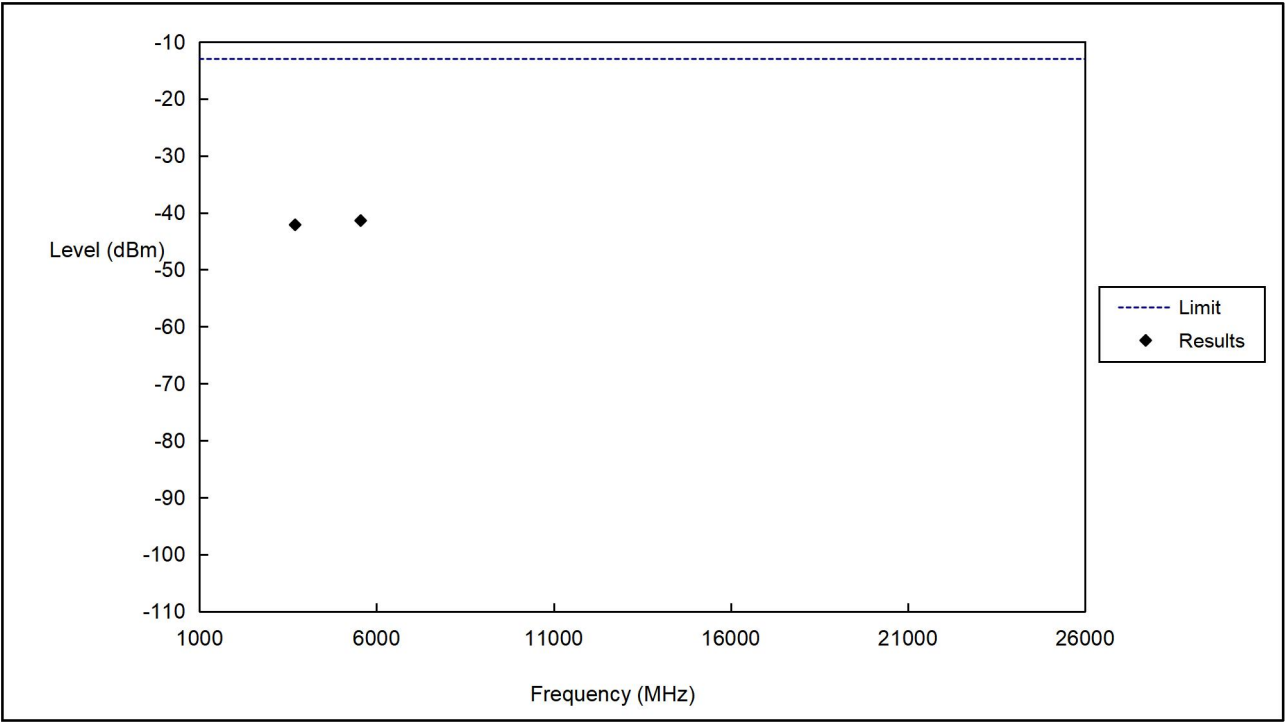


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3701.40	-42.12	-13	-29.12	RMS
2	5552.10	-41.38	-13	-28.38	RMS

Test mode:	Low Channel (1850.7MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

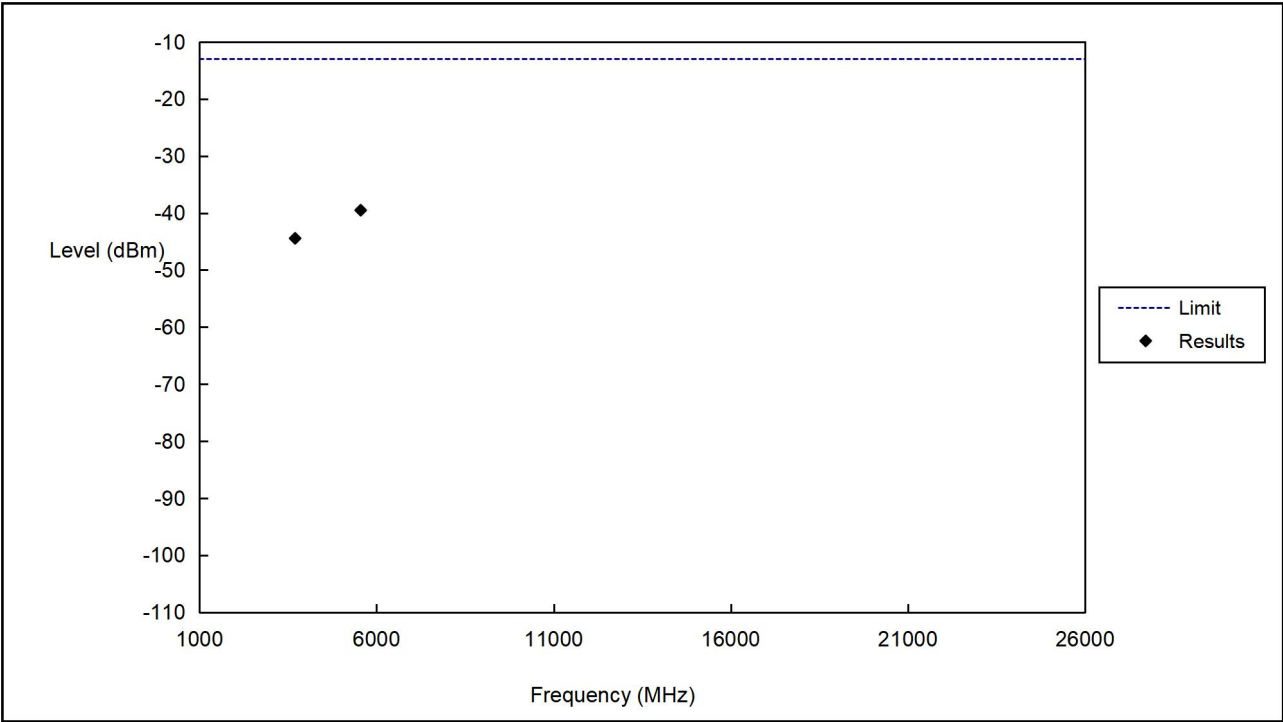


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3701.40	-44.44	-13	-31.44	RMS
2	5552.10	-39.51	-13	-26.51	RMS

Test mode:	Middle Channel (1882.5MHz)	Polarity:	Horizontal
------------	----------------------------	-----------	------------

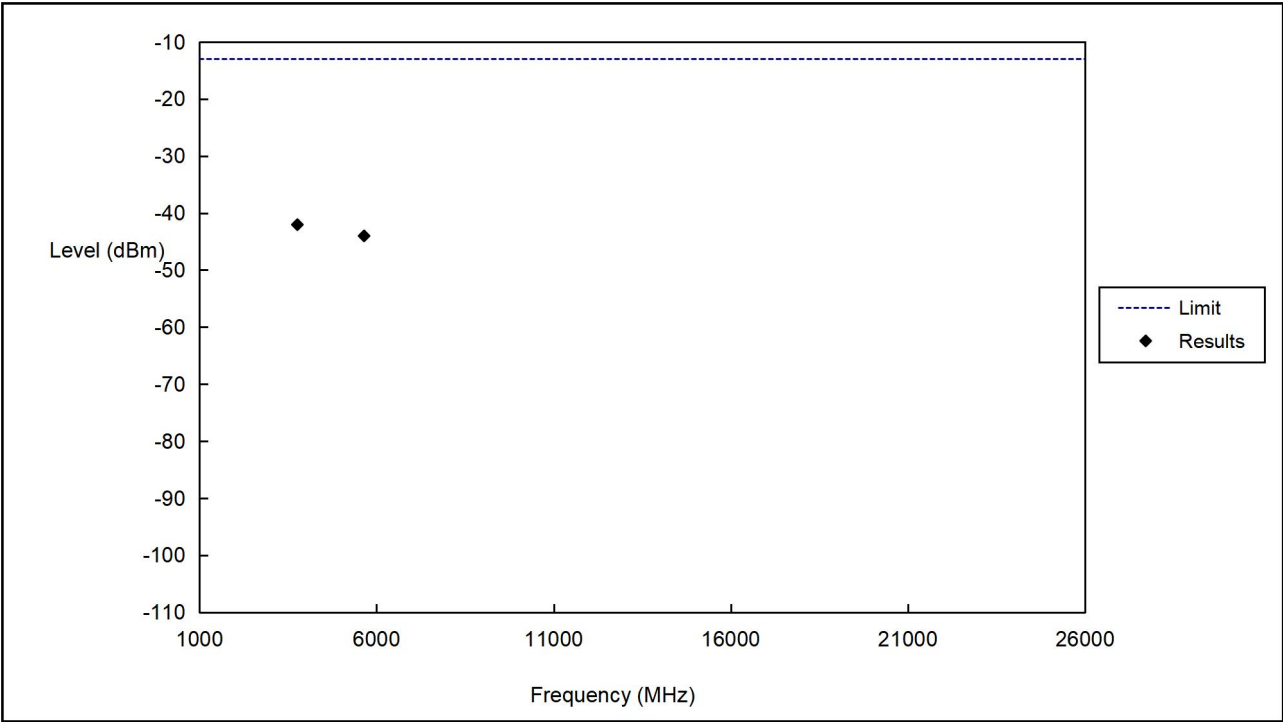

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3765.00	-42.04	-13	-29.04	RMS
2	5647.50	-44.01	-13	-31.01	RMS

Test mode:	Middle Channel (1882.5MHz)	Polarity:	Vertical
------------	----------------------------	-----------	----------

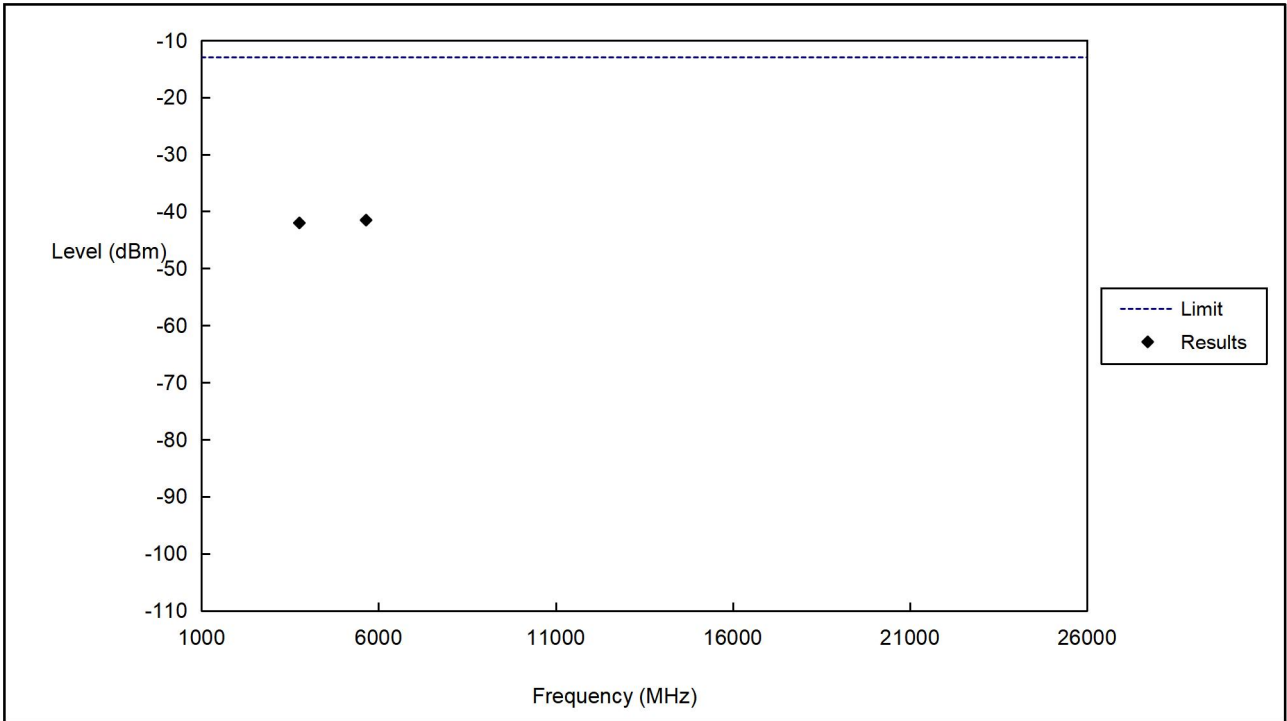

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3765.00	-42.03	-13	-29.03	RMS
2	5647.50	-41.54	-13	-28.54	RMS