




11AC40SISO-Ant1-5190-5360~40000-PASS



11AC40SISO-Ant1-5230-30~5140-PASS



11AC40SISO-Ant1-5230-5360~40000-PASS

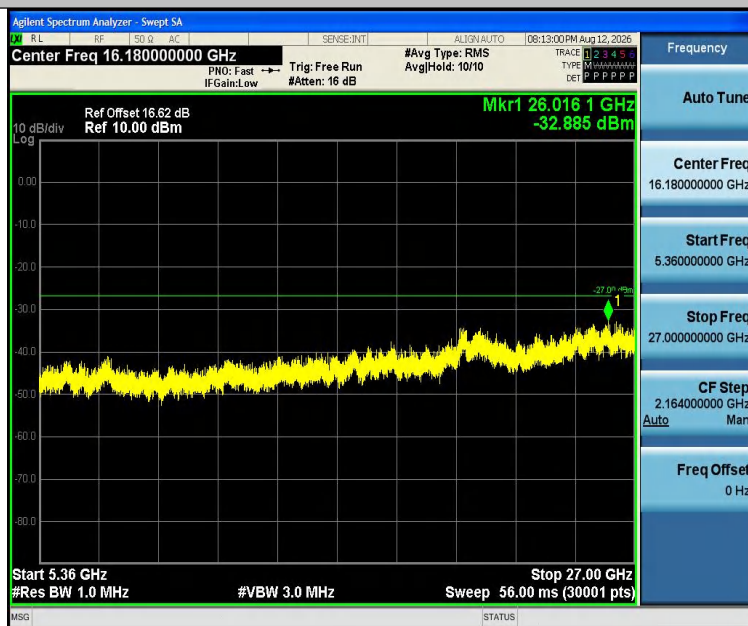

11AC40SISO-Ant1-5755-30~5650-PASS



11AC40SISO-Ant1-5755-5925~40000-PASS



11AC40SISO-Ant1-5795-30~5650-PASS



11AC40SISO-Ant1-5795-5925~40000-PASS




11AX20SISO-Ant1-5180-30~5140-PASS




11AX20SISO-Ant1-5180-5360~40000-PASS



11AX20SISO-Ant1-5200-30~5140-PASS

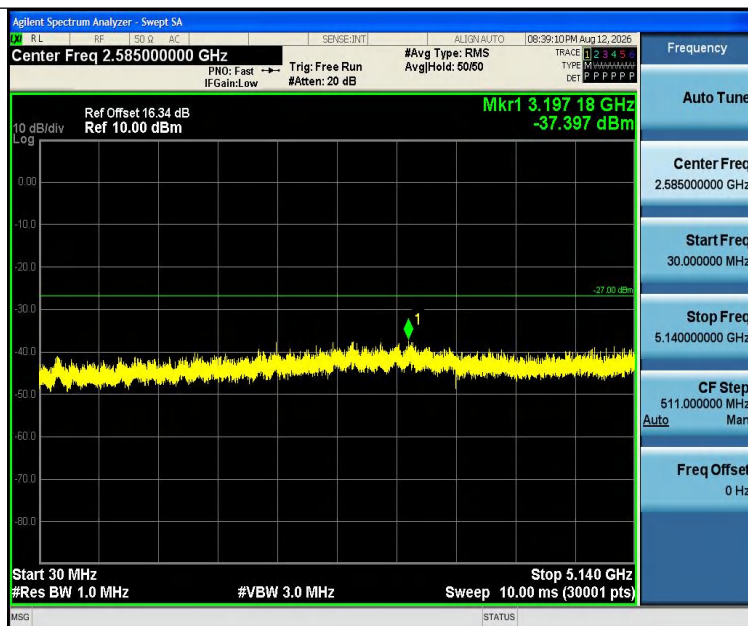

11AX20SISO-Ant1-5200-5360~40000-PASS

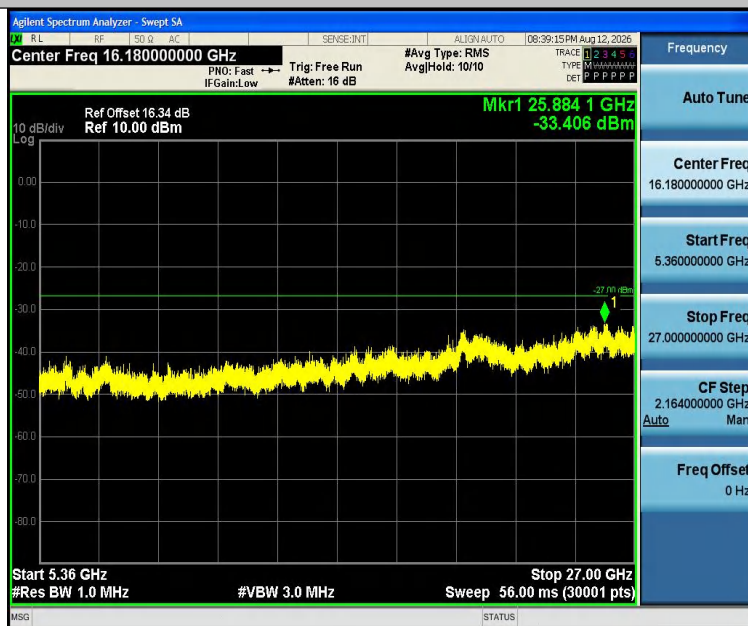

11AX20SISO-Ant1-5240-30~5140-PASS



11AX20SISO-Ant1-5240-5360~40000-PASS




11AX20SISO-Ant1-5745-30~5650-PASS



11AX20SISO-Ant1-5745-5925~40000-PASS



11AX20SISO-Ant1-5785-30~5650-PASS

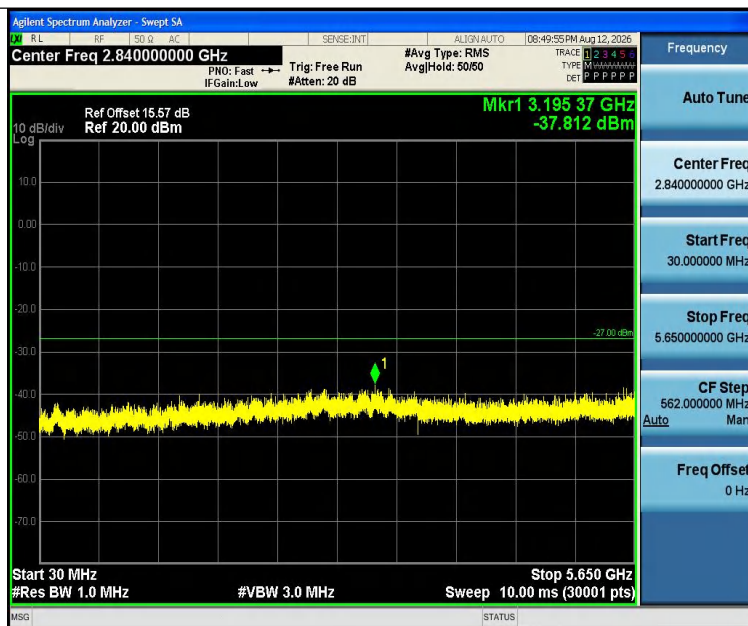

11AX20SISO-Ant1-5785-5925~40000-PASS



11AX20SISO-Ant1-5825-30~5650-PASS



11AX20SISO-Ant1-5825-5925~40000-PASS



11AX40SISO-Ant1-5190-30~5140-PASS



11AX40SISO-Ant1-5190-5360~40000-PASS



11AX40SISO-Ant1-5230-30~5140-PASS



11AX40SISO-Ant1-5230-5360~40000-PASS




11AX40SISO-Ant1-5755-30~5650-PASS



11AX40SISO-Ant1-5755-5925~40000-PASS



11AX40SISO-Ant1-5795-30~5650-PASS

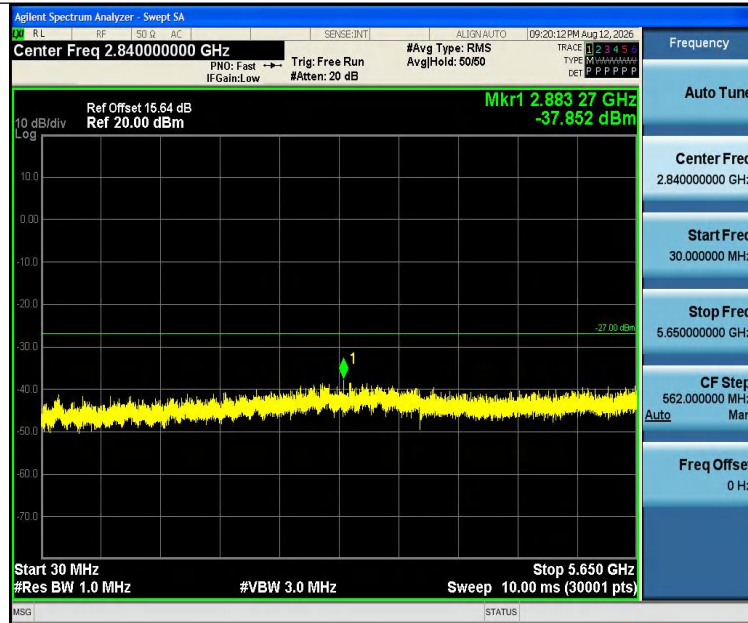

11AX40SISO-Ant1-5795-5925~40000-PASS



Note: 1.27~40GHz at least have 20dB margin. No recording in the test report.
2.



6.6 Band edge measurements

Test Result:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-37.58	≤-27	PASS
11A	Ant1	High	5240	-38.29	≤-27	PASS
11N20SISO	Ant1	Low	5180	-37.82	≤-27	PASS
11N20SISO	Ant1	High	5240	-38.08	≤-27	PASS
11N40SISO	Ant1	Low	5190	-38.09	≤-27	PASS
11N40SISO	Ant1	High	5230	-38.07	≤-27	PASS
11AC20SISO	Ant1	Low	5180	-37.69	≤-27	PASS
11AC20SISO	Ant1	High	5240	-38.1	≤-27	PASS
11AC40SISO	Ant1	Low	5190	-37.82	≤-27	PASS
11AC40SISO	Ant1	High	5230	-38.1	≤-27	PASS
11AX20SISO	Ant1	Low	5180	-37.1	≤-27	PASS
11AX20SISO	Ant1	High	5240	-38.07	≤-27	PASS
11AX40SISO	Ant1	Low	5190	-37.23	≤-27	PASS
11AX40SISO	Ant1	High	5230	-38.21	≤-27	PASS

TestMode	Antenna	ChName	Frequency[M Hz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-36.87	≤16.34	PASS
11A	Ant1	Low	5745	5700~5720	-38.96	≤12.08	PASS
11A	Ant1	Low	5745	5650~5700	-38.06	≤-6.87	PASS
11A	Ant1	Low	5745	5760~5650	-39.35	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-39.14	≤19.80	PASS
11A	Ant1	High	5825	5855~5875	-38.88	≤10.02	PASS
11A	Ant1	High	5825	5875~5925	-38.67	≤-10.57	PASS
11A	Ant1	High	5825	5925~5935	-39.51	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-38.83	≤20.27	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-38.34	≤13.98	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-38.35	≤3.08	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-39.4	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-39.17	≤19.80	PASS
11N20SISO	Ant1	High	5825	5855~5875	-38.69	≤15.54	PASS
11N20SISO	Ant1	High	5825	5875~5925	-39.02	≤-21.86	PASS
11N20SISO	Ant1	High	5825	5925~5935	-39.17	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-35.56	≤25.59	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-36.34	≤14.82	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-38.61	≤-11.82	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-39.7	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-38.88	≤23.18	PASS
11N40SISO	Ant1	High	5795	5855~5875	-38.82	≤14.15	PASS
11N40SISO	Ant1	High	5795	5875~5925	-38.67	≤-3.11	PASS
11N40SISO	Ant1	High	5795	5925~5935	-39.8	≤-27	PASS
11AC20SIS O	Ant1	Low	5745	5720~5725	-37.02	≤25.26	PASS
11AC20SIS O	Ant1	Low	5745	5700~5720	-39	≤12.54	PASS
11AC20SIS O	Ant1	Low	5745	5650~5700	-38.77	≤-13.42	PASS
11AC20SIS O	Ant1	Low	5745	5760~5650	-39.62	≤-27	PASS



11AC20SIS O	Ant1	High	5825	5850~5855	-39.78	≤20.10	PASS
11AC20SIS O	Ant1	High	5825	5855~5875	-38.39	≤15.13	PASS
11AC20SIS O	Ant1	High	5825	5875~5925	-39.25	≤-20.36	PASS
11AC20SIS O	Ant1	High	5825	5925~5935	-39.11	≤-27	PASS
11AC40SIS O	Ant1	Low	5755	5720~5725	-37.24	≤21.28	PASS
11AC40SIS O	Ant1	Low	5755	5700~5720	-37.44	≤12.67	PASS
11AC40SIS O	Ant1	Low	5755	5650~5700	-38.67	≤-11.62	PASS
11AC40SIS O	Ant1	Low	5755	5780~5650	-39.6	≤-27	PASS
11AC40SIS O	Ant1	High	5795	5850~5855	-39.45	≤21.30	PASS
11AC40SIS O	Ant1	High	5795	5855~5875	-38.15	≤10.82	PASS
11AC40SIS O	Ant1	High	5795	5875~5925	-38.54	≤-23.75	PASS
11AC40SIS O	Ant1	High	5795	5925~5935	-39.2	≤-27	PASS
11AX20SIS O	Ant1	Low	5745	5720~5725	-37.23	≤26.30	PASS
11AX20SIS O	Ant1	Low	5745	5700~5720	-37.94	≤14.98	PASS
11AX20SIS O	Ant1	Low	5745	5650~5700	-38.46	≤0.96	PASS
11AX20SIS O	Ant1	Low	5745	5760~5650	-40.19	≤-27	PASS
11AX20SIS O	Ant1	High	5825	5850~5855	-39.58	≤22.26	PASS
11AX20SIS O	Ant1	High	5825	5855~5875	-38.29	≤15.47	PASS
11AX20SIS O	Ant1	High	5825	5875~5925	-38.05	≤-7.87	PASS
11AX20SIS O	Ant1	High	5825	5925~5935	-38.01	≤-27	PASS
11AX40SIS O	Ant1	Low	5755	5720~5725	-36.04	≤22.20	PASS
11AX40SIS O	Ant1	Low	5755	5700~5720	-35.16	≤14.26	PASS
11AX40SIS O	Ant1	Low	5755	5650~5700	-39	≤-22.61	PASS
11AX40SIS O	Ant1	Low	5755	5780~5650	-40.12	≤-27	PASS
11AX40SIS O	Ant1	High	5795	5850~5855	-39.22	≤23.56	PASS
11AX40SIS O	Ant1	High	5795	5855~5875	-38.76	≤12.67	PASS
11AX40SIS O	Ant1	High	5795	5875~5925	-38.96	≤-22.65	PASS
11AX40SIS O	Ant1	High	5795	5925~5935	-39.05	≤-27	PASS




Report No.: PTC26071325701E-FC02

Note: 1. The Max. Level has been corrected by the cable loss and antenna gain.




Test Graphs:

11A-Ant1-5180-PASS

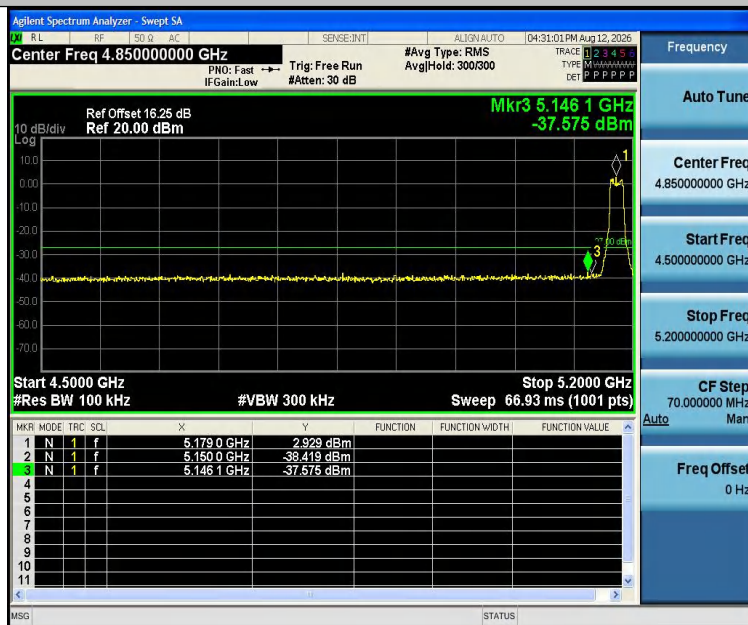


11A-Ant1-5240-PASS

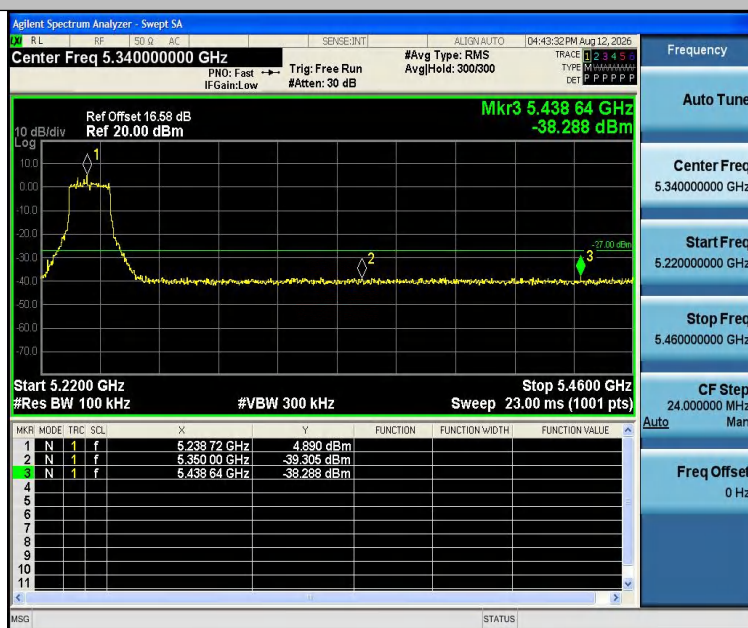

11N20SISO-Ant1-5180-PASS



11N20SISO-Ant1-5240-PASS

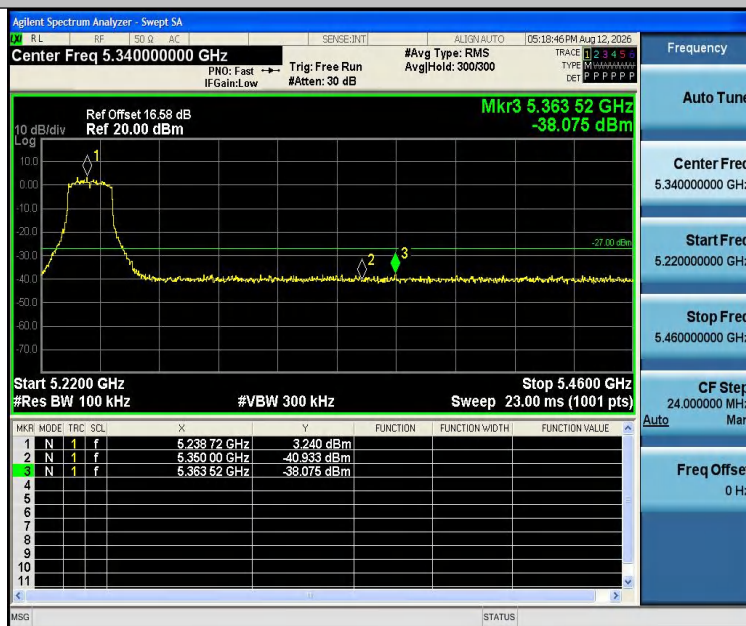


11N40SISO-Ant1-5190-PASS



11N40SISO-Ant1-5230-PASS



11AC20SISO-Ant1-5180-PASS

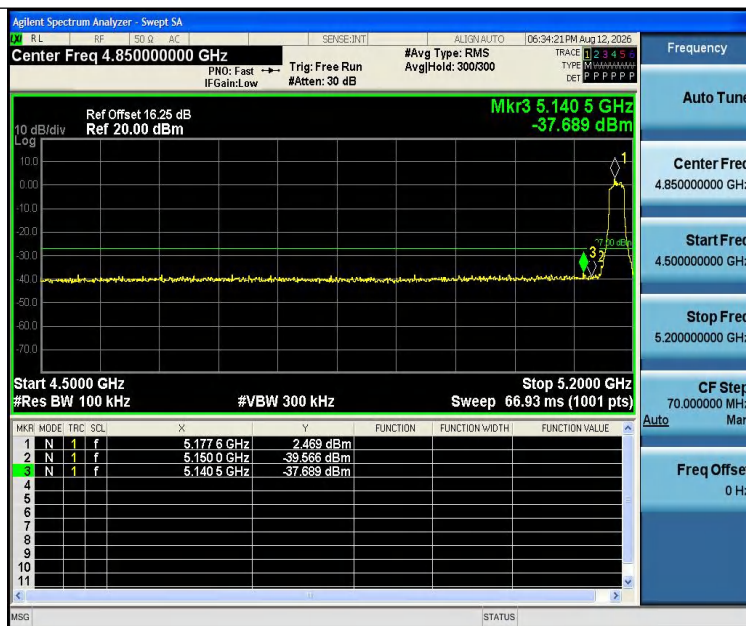

11AC20SISO-Ant1-5240-PASS



11AC40SISO-Ant1-5190-PASS




11AC40SISO-Ant1-5230-PASS



11AX20SISO-Ant1-5180-PASS



11AX20SISO-Ant1-5240-PASS

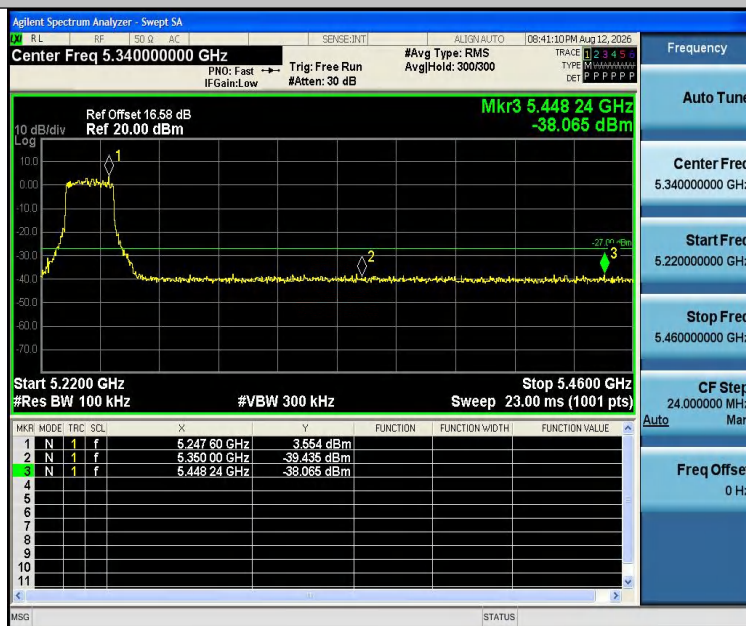

11AX40SISO-Ant1-5190-PASS



11AX40SISO-Ant1-5230-PASS



Note: 27~40GHz at least have 20dB margin. No recording in the test report.



Test plots B4:

11A-Ant1-5745-PASS



11A-Ant1-5825-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5745-PASS



11AC20SISO-Ant1-5825-PASS



11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS



11AX20SISO-Ant1-5745-PASS



11AX20SISO-Ant1-5825-PASS



11AX40SISO-Ant1-5755-PASS



11AX40SISO-Ant1-5795-PASS





6.7 Restricted Band

Test Requirement : FCC Part15 E Section 15.407(b)

Test site : Measurement Distance: 3m

Test Limit :

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	74	Peak Value
	54	Average Value

Test Procedure:

1. The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

Test Result:

Worst case mode:		802.11a(6Mbps)		Test channel:		36		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5150	50.33	6.53	56.86	68.23	11.37	H	Peak
2	5150	39.73	6.53	46.26	54	7.74	H	Average
3	5150	49.66	6.53	56.19	68.23	12.04	V	Peak
4	5150	38.08	6.53	44.61	54	9.39	V	Average



Worst case mode:		802.11a(6Mbps)		Test channel:		48		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5350	50.16	6.56	56.72	68.23	11.51	H	Peak
2	5350	40.1	6.56	46.66	54	7.34	H	Average
3	5350	49.22	6.56	55.78	68.23	12.45	V	Peak
4	5350	38.46	6.56	45.02	54	8.98	V	Average

Worst case mode:		Adapter: DCT07W050100US -802.11a(6Mbps)		Test channel:		CH149(5745MHz)		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5640	50.4	6.58	56.98	68.23	11.25	H	Peak
2	5640	39.84	6.58	46.42	54	7.58	H	Average
3	5640	49.41	6.58	55.99	68.23	12.24	V	Peak
4	5640	38.3	6.58	44.88	54	9.12	V	Average

Worst case mode:		802.11a(6Mbps)		Test channel:		165		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5850	49.58	6.64	56.22	68.23	12.01	H	Peak
2	5850	40.41	6.64	47.05	54	6.95	H	Average
3	5850	48.93	6.64	55.57	68.23	12.66	V	Peak
4	5850	38.11	6.64	44.75	54	9.25	V	Average

Note: Only recorded the worst case in the report.



7 Emission Bandwidth and Occupied Bandwidth

Test Requirement	: FCC CFR47 Part 15 Section 15.407(a)(e)
Test Method	: ANSI C63.10-2020 According to FCC §15.407(a), The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.
Test Limit	: Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth. As per FCC §15.407(e): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

7.1 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01,
Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth; b) Set the VBW > RBW; c) Detector = Peak; d) Trace mode = max hold; e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%; 99% Occupied Bandwidth
The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.



The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 Test setup



7.3 Test Result

PASS

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports.
Following channel was selected for the final test as listed below.

26 dB emission bandwidth:

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	23.880	5168.440	5192.320	---	---
11A	Ant1	5200	23.920	5186.840	5210.760	---	---
11A	Ant1	5240	22.360	5228.720	5251.080	---	---
11A	Ant1	5745	22.920	5734.320	5757.240	---	---
11A	Ant1	5785	23.040	5772.880	5795.920	---	---
11A	Ant1	5825	23.760	5813.080	5836.840	---	---
11N20SISO	Ant1	5180	24.040	5168.520	5192.560	---	---
11N20SISO	Ant1	5200	24.800	5187.920	5212.720	---	---
11N20SISO	Ant1	5240	24.800	5227.880	5252.680	---	---
11N20SISO	Ant1	5745	23.800	5733.240	5757.040	---	---
11N20SISO	Ant1	5785	24.480	5772.520	5797.000	---	---
11N20SISO	Ant1	5825	24.440	5812.720	5837.160	---	---
11N40SISO	Ant1	5190	43.680	5168.160	5211.840	---	---
11N40SISO	Ant1	5230	43.200	5208.000	5251.200	---	---
11N40SISO	Ant1	5755	46.400	5731.000	5777.400	---	---
11N40SISO	Ant1	5795	45.520	5771.560	5817.080	---	---
11AC20SISO	Ant1	5180	24.880	5167.800	5192.680	---	---
11AC20SISO	Ant1	5200	24.880	5187.840	5212.720	---	---
11AC20SISO	Ant1	5240	24.480	5228.000	5252.480	---	---
11AC20SISO	Ant1	5745	25.640	5732.480	5758.120	---	---
11AC20SISO	Ant1	5785	24.600	5772.360	5796.960	---	---
11AC20SISO	Ant1	5825	26.360	5811.600	5837.960	---	---
11AC40SISO	Ant1	5190	43.760	5167.760	5211.520	---	---
11AC40SISO	Ant1	5230	45.280	5207.360	5252.640	---	---
11AC40SISO	Ant1	5755	45.760	5732.120	5777.880	---	---
11AC40SISO	Ant1	5795	43.040	5772.840	5815.880	---	---
11AX20SISO	Ant1	5180	23.720	5168.880	5192.600	---	---
11AX20SISO	Ant1	5200	23.720	5188.080	5211.800	---	---
11AX20SISO	Ant1	5240	24.640	5227.920	5252.560	---	---
11AX20SISO	Ant1	5745	26.520	5731.400	5757.920	---	---
11AX20SISO	Ant1	5785	25.280	5772.840	5798.120	---	---
11AX20SISO	Ant1	5825	25.640	5812.440	5838.080	---	---
11AX40SISO	Ant1	5190	41.760	5169.120	5210.880	---	---