

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5180 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.12	32.61	-27.03	-	2.22	55.92	73.9	17.9	392	352	-
Hori.	5150.000	AV	37.60	32.61	-27.03	-	2.22	45.40	53.9	8.5	392	352	-
Vert.	5150.000	PK	48.36	32.61	-27.03	-	2.22	56.16	73.9	17.7	293	351	-
Vert.	5150.000	AV	37.48	32.61	-27.03	-	2.22	45.28	53.9	8.6	293	351	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

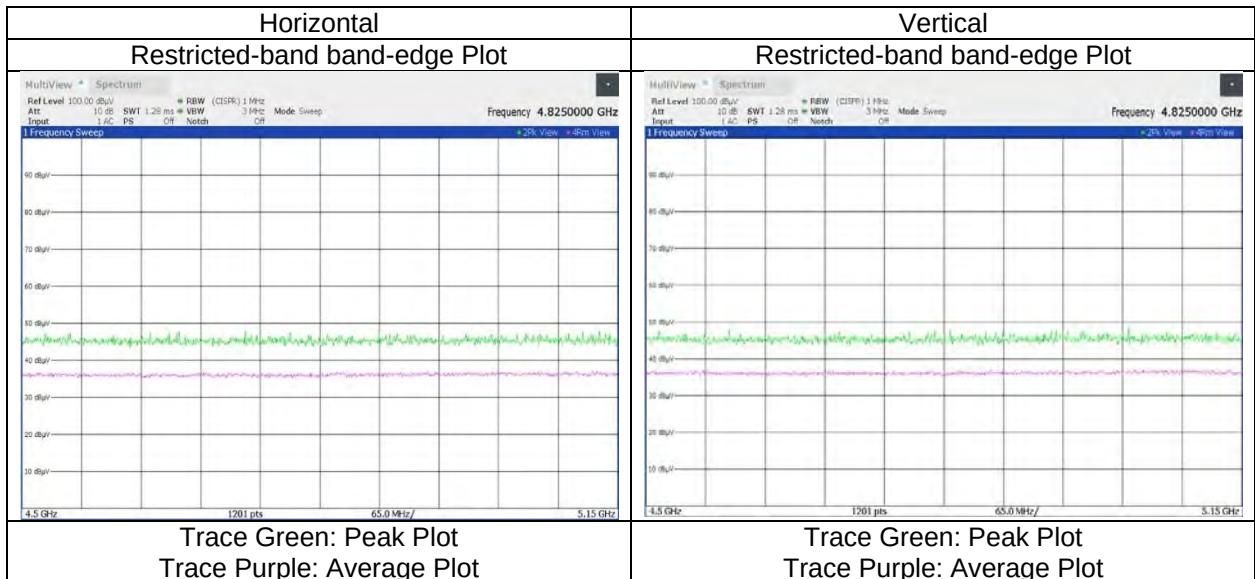

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5320 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.30	32.52	-26.78	-	2.22	56.26	73.9	17.6	396	348	-
Hori.	5350.000	AV	37.66	32.52	-26.78	-	2.22	45.62	53.9	8.2	396	348	-
Vert.	5350.000	PK	48.26	32.52	-26.78	-	2.22	56.22	73.9	17.6	385	343	-
Vert.	5350.000	AV	37.55	32.52	-26.78	-	2.22	45.51	53.9	8.3	385	343	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5500 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.77	32.98	-26.65	-	2.22	46.32	53.9	7.5	396	353	-
Vert.	5460.000	AV	37.62	32.98	-26.65	-	2.22	46.17	53.9	7.7	348	351	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.62	32.98	-26.65	-	-	2.22	57.17	-38.06	-27.0	11.0	396	353	-
Hori.	5470.000	PK	48.26	33.04	-26.64	-	-	2.22	56.88	-38.35	-27.0	11.3	396	353	-
Vert.	5460.000	PK	48.42	32.98	-26.65	-	-	2.22	56.97	-38.26	-27.0	11.2	348	351	-
Vert.	5470.000	PK	48.52	33.04	-26.64	-	-	2.22	57.14	-38.09	-27.0	11.0	348	351	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : } 3 [m]) \wedge 2 / 30 * 10 \wedge 3)$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

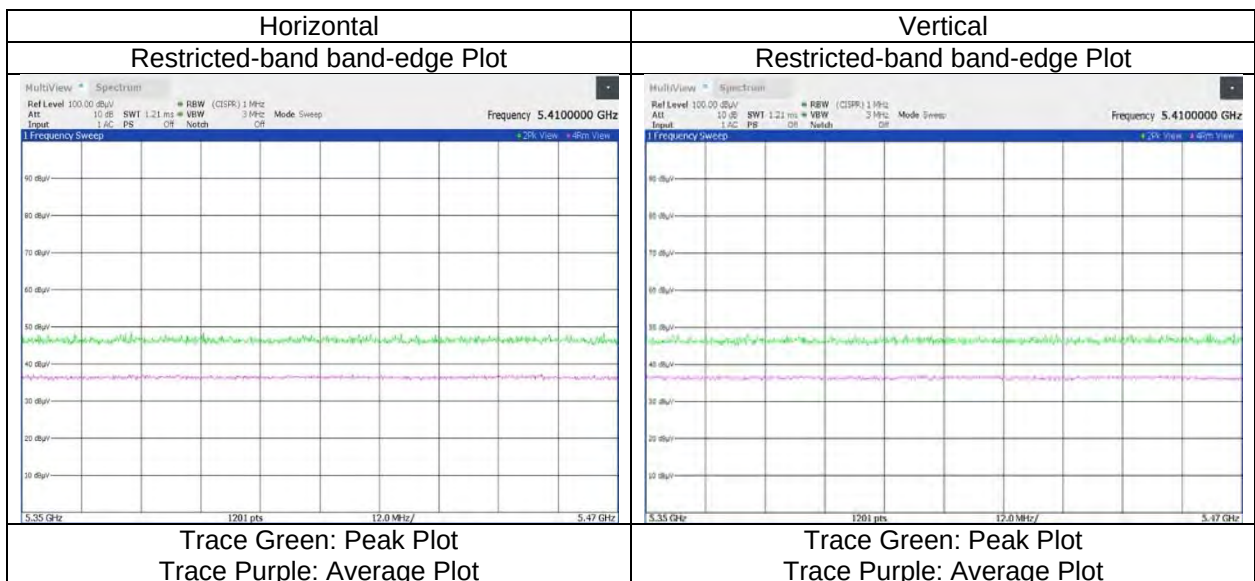

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5700 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.53	33.67	-26.57	-	-	2.22	57.85	-37.38	-27.0	10.3	395	352	-
Vert.	5725.000	PK	48.62	33.67	-26.57	-	-	2.22	57.94	-37.29	-27.0	10.2	331	7	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

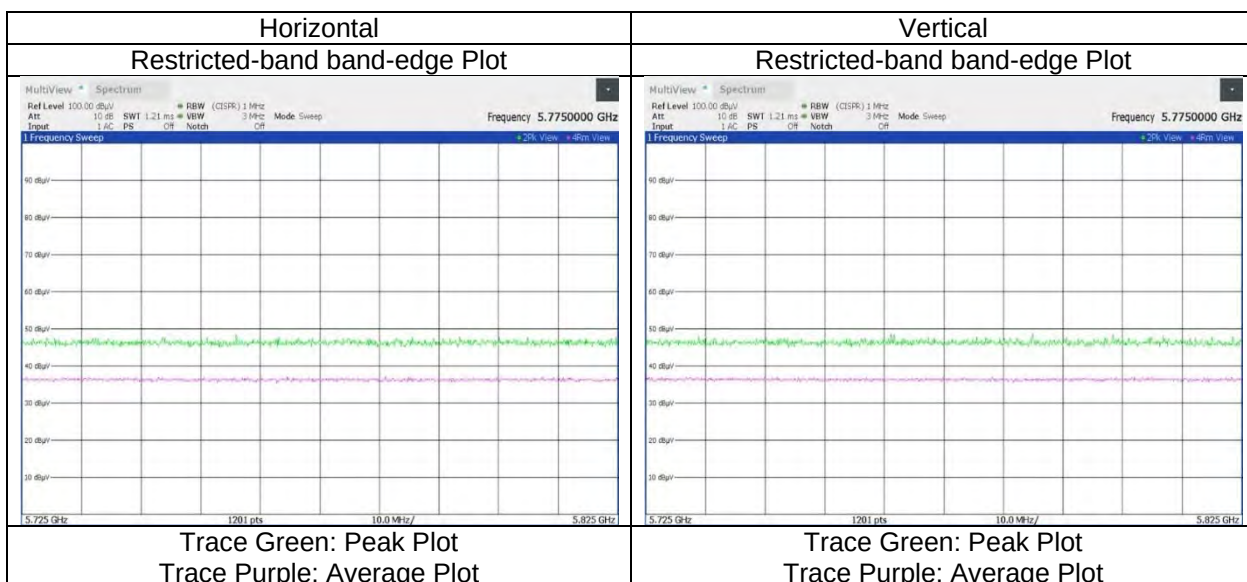

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5745 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.39	33.66	-26.58	-	-	2.22	57.69	-37.54	-27.0	10.5	379	0	-
Hori.	5700.000	PK	48.53	33.69	-26.58	-	-	2.22	57.86	-37.37	10.0	47.3	379	0	-
Hori.	5720.000	PK	48.49	33.66	-26.58	-	-	2.22	57.79	-37.44	15.6	53.0	379	0	-
Hori.	5725.000	PK	48.66	33.67	-26.57	-	-	2.22	57.98	-37.25	27.0	64.2	379	0	-
Vert.	5650.000	PK	48.74	33.66	-26.58	-	-	2.22	58.04	-37.19	-27.0	10.1	329	4	-
Vert.	5700.000	PK	48.69	33.69	-26.58	-	-	2.22	58.02	-37.21	10.0	47.2	329	4	-
Vert.	5720.000	PK	48.95	33.66	-26.58	-	-	2.22	58.25	-36.98	15.6	52.5	329	4	-
Vert.	5725.000	PK	48.62	33.67	-26.57	-	-	2.22	57.94	-37.29	27.0	64.2	329	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

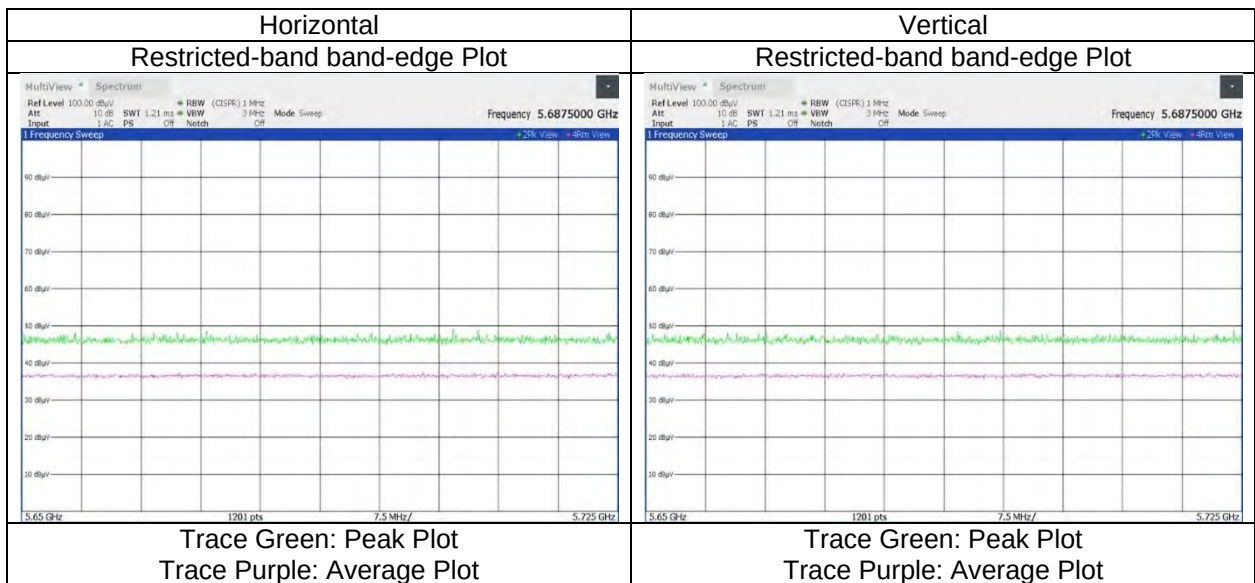

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA), 242-tone RU, RU Index 61, MIMO 5825 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Duty Fac.	Distance Fac.	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	5850.000	PK	48.80	33.70	-26.56	-	-	2.22	58.16	-37.07	27.0	64.0	334	354	-
Hori.	5855.000	PK	48.21	33.71	-26.56	-	-	2.22	57.58	-37.65	15.6	53.2	334	354	-
Hori.	5875.000	PK	48.58	33.73	-26.54	-	-	2.22	57.99	-37.24	10.0	47.2	334	354	-
Hori.	5925.000	PK	48.82	33.85	-26.53	-	-	2.22	58.36	-36.87	-27.0	9.8	334	354	-
Vert.	5850.000	PK	48.53	33.70	-26.56	-	-	2.22	57.89	-37.34	27.0	64.3	327	6	-
Vert.	5855.000	PK	48.69	33.71	-26.56	-	-	2.22	58.06	-37.17	15.6	52.7	327	6	-
Vert.	5875.000	PK	48.47	33.73	-26.54	-	-	2.22	57.88	-37.35	10.0	47.3	327	6	-
Vert.	5925.000	PK	48.26	33.85	-26.53	-	-	2.22	57.80	-37.43	-27.0	10.4	327	6	-


Result = Reading + Ant. Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

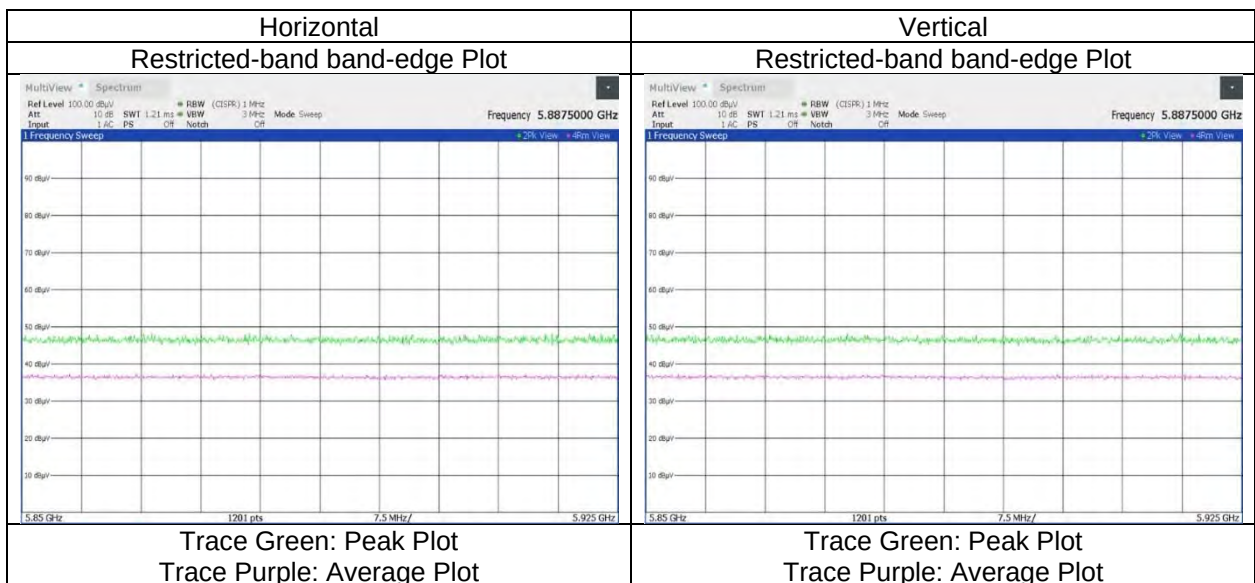

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5190 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 16, 2026	WAC2	22 deg. C	46 % RH	Naoki Saga	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.36	32.61	-27.03	-	2.22	57.16	73.9	16.7	399	3	-
Hori.	15570.000	PK	46.46	39.59	-27.41	-	-9.54	49.10	73.9	24.8	150	0	Floor Noise
Hori.	20760.020	PK	51.77	33.17	12.78	51.32	-9.54	36.86	73.9	37.0	158	253	-
Hori.	15570.000	AV	35.35	39.59	-27.41	-	-9.54	37.99	53.9	15.9	150	0	Floor Noise
Vert.	5150.000	PK	49.30	32.61	-27.03	-	2.22	57.10	73.9	16.8	379	7	-
Vert.	15570.000	PK	46.52	39.59	-27.41	-	-9.54	49.16	73.9	24.7	150	0	Floor Noise
Vert.	20760.020	PK	51.66	33.17	12.78	51.32	-9.54	36.75	73.9	37.1	153	344	-
Vert.	15570.000	AV	35.26	39.59	-27.41	-	-9.54	37.90	53.9	16.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5150.000	AV	37.61	32.61	-27.03	-	0.12	2.22	45.53	53.9	8.3 *1)	-
Hori.	20760.020	AV	47.17	33.17	12.78	51.32	0.12	-9.54	32.38	53.9	21.5 *2)	-
Vert.	5150.000	AV	37.56	32.61	-27.03	-	0.12	2.22	45.48	53.9	8.4 *1)	-
Vert.	20760.020	AV	46.44	33.17	12.78	51.32	0.12	-9.54	31.65	53.9	22.2 *2)	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	6920.035	PK	50.98	35.99	-34.73	-	-	2.22	54.46	-40.77	-27.0	13.7	387	333	-
Hori.	10380.000	PK	45.77	36.47	-30.29	-	-	-9.54	42.41	-52.82	-27.0	25.8	150	0	Floor Noise
Vert.	6920.005	PK	51.72	35.99	-34.73	-	-	2.22	55.20	-40.03	-27.0	13.0	397	40	-
Vert.	10380.000	PK	45.84	36.47	-30.29	-	-	-9.54	42.48	-52.75	-27.0	25.7	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10^{(Result [dBuV/m]/20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)}$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5190 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz

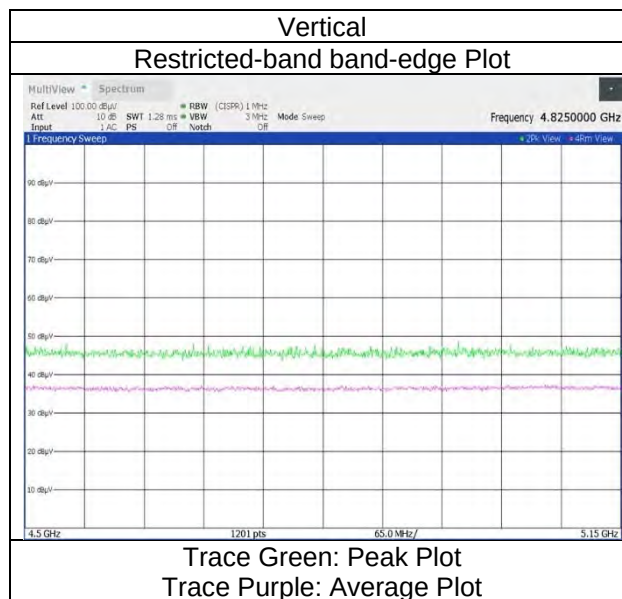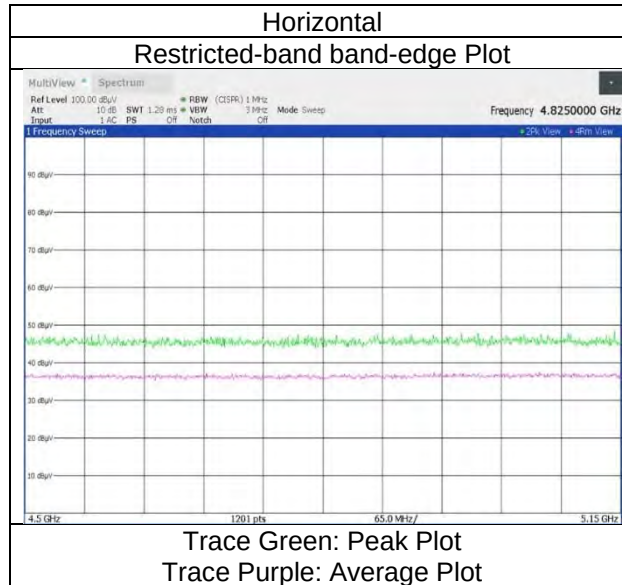

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5230 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	15690.000	PK	46.99	39.72	-27.54	-	-9.54	49.63	73.9	24.2	150	0	Floor Noise
Hori.	20920.010	PK	51.48	33.16	12.84	51.19	-9.54	36.75	73.9	37.1	142	273	-
Hori.	15690.000	AV	35.96	39.72	-27.54	-	-9.54	38.60	53.9	15.3	150	0	Floor Noise
Vert.	15690.000	PK	46.78	39.72	-27.54	-	-9.54	49.42	73.9	24.4	150	0	Floor Noise
Vert.	20920.010	PK	51.15	33.16	12.84	51.19	-9.54	36.42	73.9	37.4	158	13	-
Vert.	15690.000	AV	35.80	39.72	-27.54	-	-9.54	38.44	53.9	15.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	20920.010	AV	46.43	33.16	12.84	51.19	0.12	-9.54	31.82	53.9	22.0	*2)
Vert.	20920.010	AV	46.46	33.16	12.84	51.19	0.12	-9.54	31.85	53.9	22.0	*2)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz)) - Gain(Amp) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	6973.333	PK	50.03	35.94	-34.73	-	-	2.22	53.46	-41.77	-27.0	14.7	385	335	-
Hori.	10460.000	PK	46.89	36.59	-30.11	-	-	-9.54	43.83	-51.40	-27.0	24.4	150	0	Floor Noise
Vert.	6973.333	PK	50.07	35.94	-34.73	-	-	2.22	53.50	-41.73	-27.0	14.7	385	34	-
Vert.	10460.000	PK	46.54	36.59	-30.11	-	-	-9.54	43.48	-51.75	-27.0	24.7	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10 * (\text{Result [dBuV/m]} / 20) * 10 * (-6) * \text{Distance : } 3 [m])^2 / 30 * 10^3)$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5310 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.03	32.52	-26.78	-	2.22	56.99	73.9	16.9	398	354	-
Hori.	10620.000	PK	47.05	37.13	-29.97	-	-9.54	44.67	73.9	29.2	150	0	Floor Noise
Hori.	15930.000	PK	46.81	39.92	-27.80	-	-9.54	49.39	73.9	24.5	150	0	Floor Noise
Hori.	21240.010	PK	52.62	33.28	12.95	51.08	-9.54	38.23	73.9	35.6	156	217	-
Hori.	10620.000	AV	35.36	37.13	-29.97	-	-9.54	32.98	53.9	20.9	150	0	Floor Noise
Hori.	15930.000	AV	35.78	39.92	-27.80	-	-9.54	38.36	53.9	15.5	150	0	Floor Noise
Vert.	5350.000	PK	48.96	32.52	-26.78	-	2.22	56.92	73.9	16.9	336	349	-
Vert.	10620.000	PK	47.01	37.13	-29.97	-	-9.54	44.63	73.9	29.2	150	0	Floor Noise
Vert.	15930.000	PK	46.85	39.92	-27.80	-	-9.54	49.43	73.9	24.4	150	0	Floor Noise
Vert.	21240.010	PK	51.73	33.28	12.95	51.08	-9.54	37.34	73.9	36.5	150	78	-
Vert.	10620.000	AV	35.38	37.13	-29.97	-	-9.54	33.00	53.9	20.9	150	0	Floor Noise
Vert.	15930.000	AV	35.66	39.92	-27.80	-	-9.54	38.24	53.9	15.6	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5350.000	AV	37.61	32.52	-26.78	-	0.12	2.22	45.69	53.9	8.2	*1)
Hori.	21240.010	AV	48.80	33.28	12.95	51.08	0.12	-9.54	34.53	53.9	19.3	*2)
Vert.	5350.000	AV	37.43	32.52	-26.78	-	0.12	2.22	45.51	53.9	8.3	*1)
Vert.	21240.010	AV	46.37	33.28	12.95	51.08	0.12	-9.54	32.10	53.9	21.8	*2)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7080.006	PK	49.56	35.88	-34.63	-	-	2.22	53.03	-42.20	-27.0	15.2	389	337	-
Vert.	7080.006	PK	49.50	35.88	-34.63	-	-	2.22	52.97	-42.26	-27.0	15.2	400	2	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5310 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz

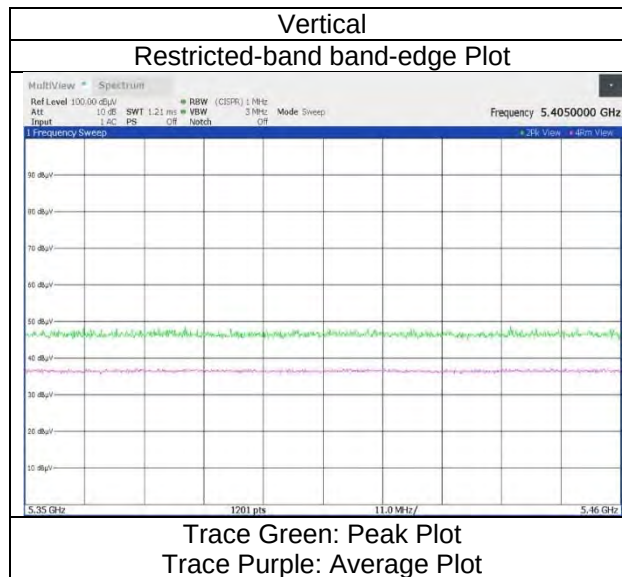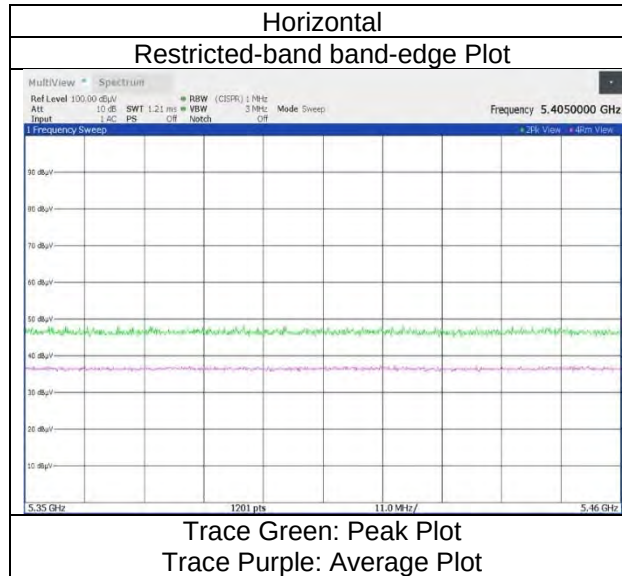

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5510 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11020.000	PK	45.97	37.36	-29.74	-	-9.54	44.05	73.9	29.8	150	0	Floor Noise
Hori.	22040.020	PK	54.89	33.40	13.18	51.04	-9.54	40.89	73.9	33.0	171	262	-
Hori.	11020.000	AV	35.00	37.36	-29.74	-	-9.54	33.08	53.9	20.8	150	0	Floor Noise
Vert.	11020.000	PK	46.03	37.36	-29.74	-	-9.54	44.11	73.9	29.7	150	0	Floor Noise
Vert.	22040.020	PK	52.67	33.40	13.18	51.04	-9.54	38.67	73.9	35.2	140	45	-
Vert.	11020.000	AV	35.02	37.36	-29.74	-	-9.54	33.10	53.9	20.8	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5460.000	AV	37.47	32.98	-26.65	-	0.12	2.22	46.14	53.9	7.7	*1)
Hori.	22040.020	AV	52.03	33.40	13.18	51.04	0.12	-9.54	38.15	53.9	15.7	*2)
Vert.	5460.000	AV	37.68	32.98	-26.65	-	0.12	2.22	46.35	53.9	7.5	*1)
Vert.	22040.020	AV	47.85	33.40	13.18	51.04	0.12	-9.54	33.97	53.9	19.9	*2)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.60	32.98	-26.65	-	-	2.22	57.15	-38.08	-27.0	11.0	391	353	-
Hori.	5470.000	PK	48.22	33.04	-26.64	-	-	2.22	56.84	-38.39	-27.0	11.3	391	353	-
Hori.	16530.000	PK	47.04	39.85	-26.67	-	-	-9.54	50.68	-44.55	-27.0	17.5	150	0	Floor Noise
Vert.	5460.000	PK	48.72	32.98	-26.65	-	-	2.22	57.27	-37.96	-27.0	10.9	313	8	-
Vert.	5470.000	PK	48.27	33.04	-26.64	-	-	2.22	56.89	-38.34	-27.0	11.3	313	8	-
Vert.	16530.000	PK	47.19	39.85	-26.67	-	-	-9.54	50.83	-44.40	-27.0	17.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5510 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz

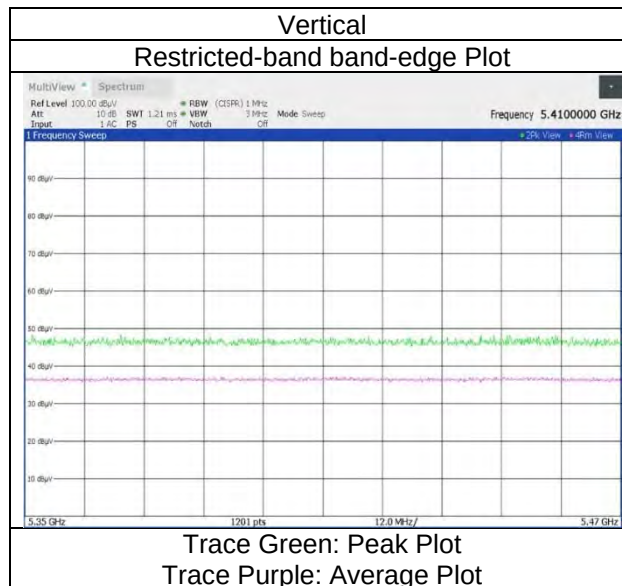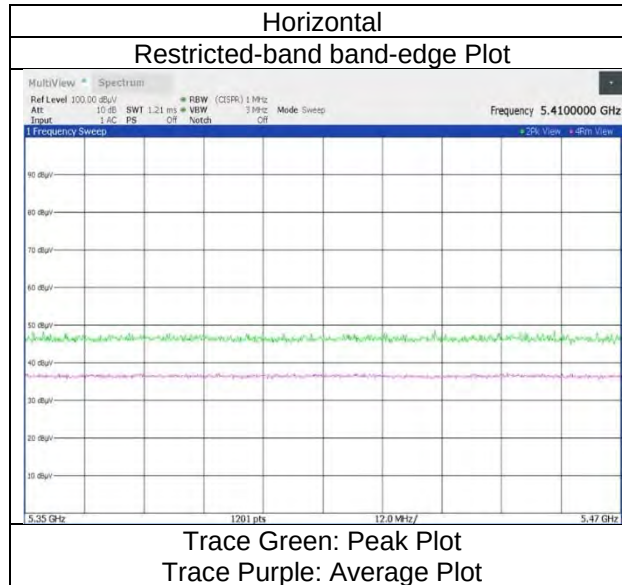

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5590 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11180.000	PK	46.24	37.46	-29.66	-	-9.54	44.50	73.9	29.4	150	0	Floor Noise
Hori.	22360.000	PK	51.87	33.54	13.32	50.91	-9.54	38.28	73.9	35.6	152	265	-
Hori.	11180.000	AV	35.14	37.46	-29.66	-	-9.54	33.40	53.9	20.5	150	0	Floor Noise
Vert.	11180.000	PK	46.93	37.46	-29.66	-	-9.54	45.19	73.9	28.7	150	0	Floor Noise
Vert.	22360.000	PK	51.34	33.54	13.32	50.91	-9.54	37.75	73.9	36.1	145	180	-
Vert.	11180.000	AV	35.32	37.46	-29.66	-	-9.54	33.58	53.9	20.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	22360.000	AV	46.73	33.54	13.32	50.91	0.12	-9.54	33.26	53.9	20.6	-
Vert.	22360.000	AV	47.14	33.54	13.32	50.91	0.12	-9.54	33.67	53.9	20.2	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz)) - Gain(Amp) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	16770.000	PK	46.47	39.36	-26.42	-	-	-9.54	49.87	-45.36	-27.0	18.3	150	0	Floor Noise
Vert.	16770.000	PK	46.48	39.36	-26.42	-	-	-9.54	49.88	-45.35	-27.0	18.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{-3})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5670 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11340.000	PK	46.04	37.77	-29.55	-	-9.54	44.72	73.9	29.1	150	0	Floor Noise
Hori.	22680.010	PK	51.38	33.66	13.43	50.75	-9.54	38.18	73.9	35.7	153	222	-
Hori.	11340.000	AV	34.54	37.77	-29.55	-	-9.54	33.22	53.9	20.6	150	0	Floor Noise
Vert.	11340.000	PK	46.85	37.77	-29.55	-	-9.54	45.53	73.9	28.3	150	0	Floor Noise
Vert.	22680.010	PK	50.78	33.66	13.43	50.75	-9.54	37.58	73.9	36.3	146	10	-
Vert.	11340.000	AV	34.73	37.77	-29.55	-	-9.54	33.41	53.9	20.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	22680.010	AV	46.88	33.66	13.43	50.75	0.12	-9.54	33.80	53.9	20.1	*2)
Vert.	22680.010	AV	45.52	33.66	13.43	50.75	0.12	-9.54	32.44	53.9	21.4	*2)

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz)) - Gain(Amp) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.91	33.67	-26.57	-	-	2.22	58.23	-37.00	-27.0	10.0	383	357	-
Hori.	17010.000	PK	47.18	39.63	-26.17	-	-	-9.54	51.10	-44.13	-27.0	17.1	150	0	Floor Noise
Vert.	5725.000	PK	49.00	33.67	-26.57	-	-	2.22	58.32	-36.91	-27.0	9.9	357	4	-
Vert.	17010.000	PK	47.12	39.63	-26.17	-	-	-9.54	51.04	-44.19	-27.0	17.1	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10 * (\text{Result [dBuV/m]} / 20) * 10 * (-6) * \text{Distance : } 3 [m])^2 / 30 * 10^3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 07, 2026	WAC2	22 deg. C	40 % RH	Hiromasa Sato	1 GHz to 6.4 GHz

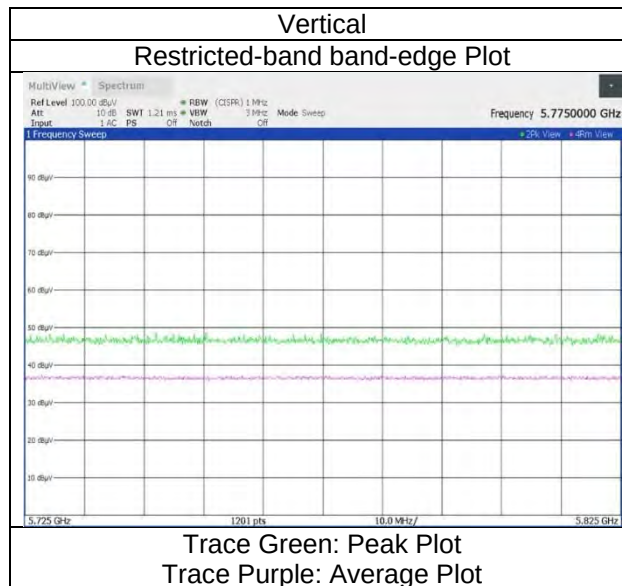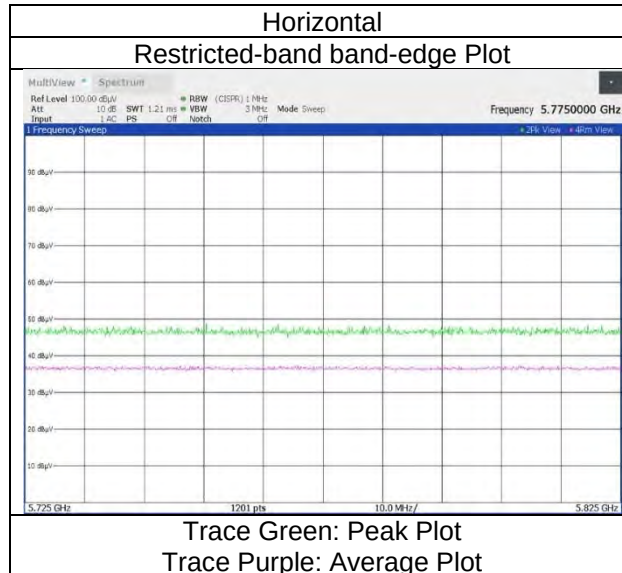

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5755 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11510.000	PK	46.70	37.99	-29.47	-	-9.54	45.68	73.9	28.2	150	0	Floor Noise
Hori.	23020.010	PK	51.15	33.71	13.53	50.59	-9.54	38.26	73.9	35.6	153	268	-
Hori.	11510.000	AV	35.55	37.99	-29.47	-	-9.54	34.53	53.9	19.3	150	0	Floor Noise
Vert.	11510.000	PK	47.00	37.99	-29.47	-	-9.54	45.98	73.9	27.9	150	0	Floor Noise
Vert.	23020.010	PK	51.32	33.71	13.53	50.59	-9.54	38.43	73.9	35.4	149	65	-
Vert.	11510.000	AV	35.61	37.99	-29.47	-	-9.54	34.59	53.9	19.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Average measurement value with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	23020.010	AV	46.91	33.71	13.53	50.59	0.12	-9.54	34.14	53.9	19.7	*2)
Vert.	23020.010	AV	46.20	33.71	13.53	50.59	0.12	-9.54	33.43	53.9	20.4	*2)

Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz)) - Gain(Amp) + Duty Fac. + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Duty factor refer to "Burst rate confirmation" sheet.

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.91	33.66	-26.58	-	-	2.22	58.21	-37.02	-27.0	10.0	332	6	-
Hori.	5700.000	PK	48.22	33.69	-26.58	-	-	2.22	57.55	-37.68	10.0	47.6	332	6	-
Hori.	5720.000	PK	48.34	33.66	-26.58	-	-	2.22	57.64	-37.59	15.6	53.1	332	6	-
Hori.	5725.000	PK	49.75	33.67	-26.57	-	-	2.22	59.07	-36.16	27.0	63.1	332	6	-
Hori.	17265.000	PK	46.66	40.17	-25.91	-	-	-9.54	51.38	-43.85	-27.0	16.8	150	0	Floor Noise
Vert.	5650.000	PK	49.12	33.66	-26.58	-	-	2.22	58.42	-36.81	-27.0	9.8	225	358	-
Vert.	5700.000	PK	48.88	33.69	-26.58	-	-	2.22	58.21	-37.02	10.0	47.0	225	358	-
Vert.	5720.000	PK	48.57	33.66	-26.58	-	-	2.22	57.87	-37.36	15.6	52.9	225	358	-
Vert.	5725.000	PK	48.97	33.67	-26.57	-	-	2.22	58.29	-36.94	27.0	63.9	225	358	-
Vert.	17265.000	PK	46.94	40.17	-25.91	-	-	-9.54	51.66	-43.57	-27.0	16.5	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{\wedge}(\text{Result [dBuV/m]} / 20)) * 10^{\wedge}(-6) * \text{Distance} : 3 [m])^{\wedge}2 / 30 * 10^{\wedge}3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5755 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

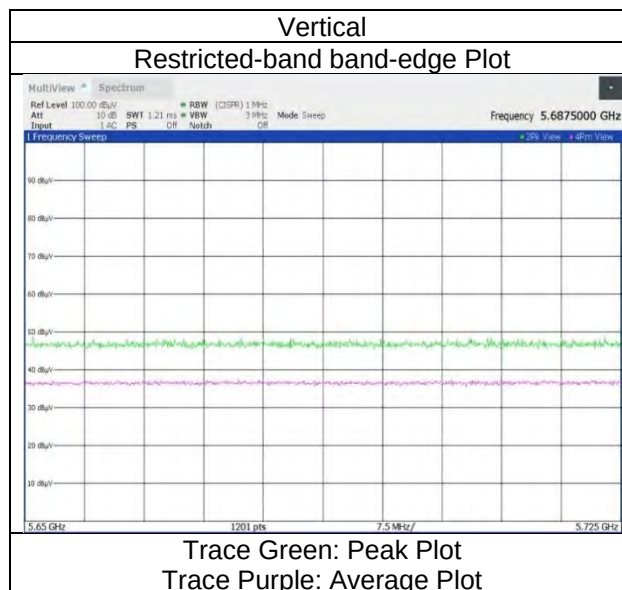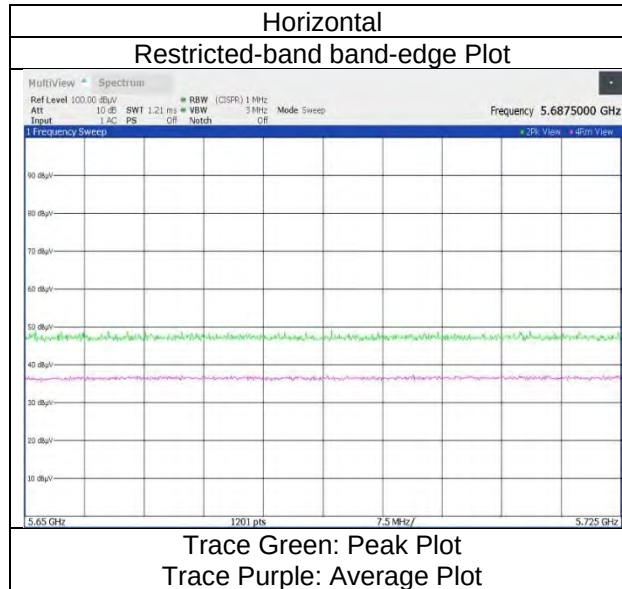

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5795 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11590.000	PK	46.39	38.06	-29.44	-	-9.54	45.47	73.9	28.4	150	0	Floor Noise
Hori.	11590.000	AV	35.13	38.06	-29.44	-	-9.54	34.21	53.9	19.6	150	0	Floor Noise
Vert.	11590.000	PK	46.41	38.06	-29.44	-	-9.54	45.49	73.9	28.4	150	0	Floor Noise
Vert.	11590.000	AV	35.11	38.06	-29.44	-	-9.54	34.19	53.9	19.7	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.80	33.70	-26.56	-	-	2.22	58.16	-37.07	27.0	64.0	333	349	-
Hori.	5855.000	PK	48.60	33.71	-26.56	-	-	2.22	57.97	-37.26	15.6	52.8	333	349	-
Hori.	5875.000	PK	48.39	33.73	-26.54	-	-	2.22	57.80	-37.43	10.0	47.4	333	349	-
Hori.	5925.000	PK	48.30	33.85	-26.53	-	-	2.22	57.84	-37.39	-27.0	10.3	333	349	-
Hori.	17385.000	PK	46.49	40.36	-25.80	-	-	-9.54	51.51	-43.72	-27.0	16.7	150	0	Floor Noise
Hori.	23180.030	PK	52.76	33.75	13.57	50.66	-	-9.54	39.88	-55.35	-27.0	28.3	134	260	-
Vert.	5850.000	PK	48.85	33.70	-26.56	-	-	2.22	58.21	-37.02	27.0	64.0	338	357	-
Vert.	5855.000	PK	49.27	33.71	-26.56	-	-	2.22	58.64	-36.59	15.6	52.1	338	357	-
Vert.	5875.000	PK	49.02	33.73	-26.54	-	-	2.22	58.43	-36.80	10.0	46.8	338	357	-
Vert.	5925.000	PK	48.52	33.85	-26.53	-	-	2.22	58.06	-37.17	-27.0	10.1	338	357	-
Vert.	17385.000	PK	46.53	40.36	-25.80	-	-	-9.54	51.55	-43.68	-27.0	16.6	150	0	Floor Noise
Vert.	23180.030	PK	51.49	33.75	13.57	50.66	-	-9.54	38.61	-56.62	-27.0	29.6	155	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)}) * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{-3})$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-40, MIMO 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

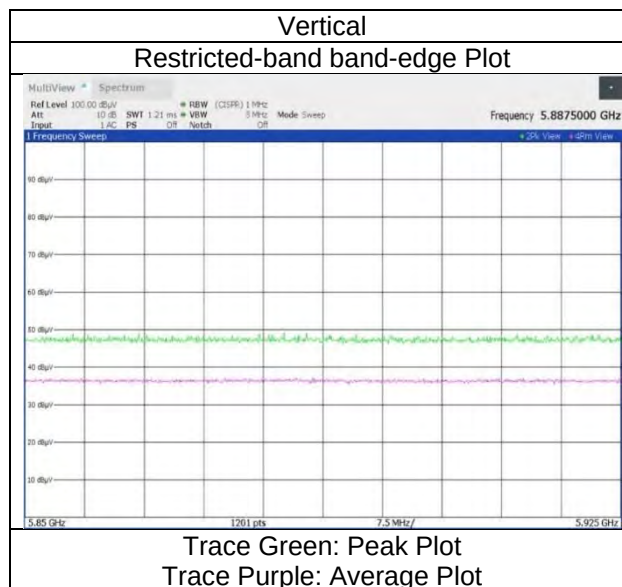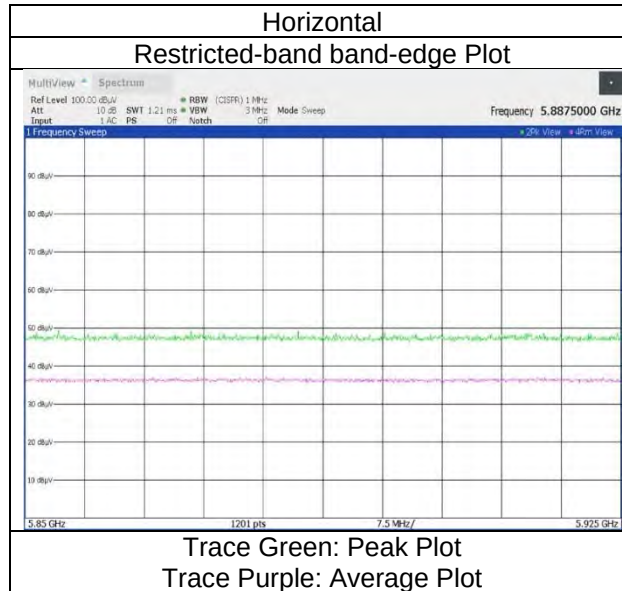

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5190 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.89	32.61	-27.03	-	2.22	56.69	73.9	17.2	381	10	-
Hori.	15570.000	PK	46.78	39.59	-27.41	-	-9.54	49.42	73.9	24.4	150	0	Floor Noise
Hori.	20760.020	PK	52.06	33.17	12.78	51.32	-9.54	37.15	73.9	36.7	165	253	-
Hori.	5150.000	AV	37.40	32.61	-27.03	-	2.22	45.20	53.9	8.7	381	10	-
Hori.	15570.000	AV	35.32	39.59	-27.41	-	-9.54	37.96	53.9	15.9	150	0	Floor Noise
Hori.	20760.020	AV	47.23	33.17	12.78	51.32	-9.54	32.32	53.9	21.5	165	253	-
Vert.	5150.000	PK	48.27	32.61	-27.03	-	2.22	56.07	73.9	17.8	237	19	-
Vert.	15570.000	PK	46.86	39.59	-27.41	-	-9.54	49.50	73.9	24.4	150	0	Floor Noise
Vert.	20760.020	PK	51.16	33.17	12.78	51.32	-9.54	36.25	73.9	37.6	161	344	-
Vert.	5150.000	AV	37.42	32.61	-27.03	-	2.22	45.22	53.9	8.6	237	19	-
Vert.	15570.000	AV	35.12	39.59	-27.41	-	-9.54	37.76	53.9	16.1	150	0	Floor Noise
Vert.	20760.020	AV	46.19	33.17	12.78	51.32	-9.54	31.28	53.9	22.6	161	344	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	6920.005	PK	51.42	35.99	-34.73	-	-	2.22	54.90	-40.33	-27.0	13.3	397	333	-
Hori.	10380.000	PK	46.00	36.47	-30.29	-	-	-9.54	42.64	-52.59	-27.0	25.5	150	0	Floor Noise
Vert.	6920.005	PK	52.12	35.99	-34.73	-	-	2.22	55.60	-39.63	-27.0	12.6	393	357	-
Vert.	10380.000	PK	45.49	36.47	-30.29	-	-	-9.54	42.13	-53.10	-27.0	26.1	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5190 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

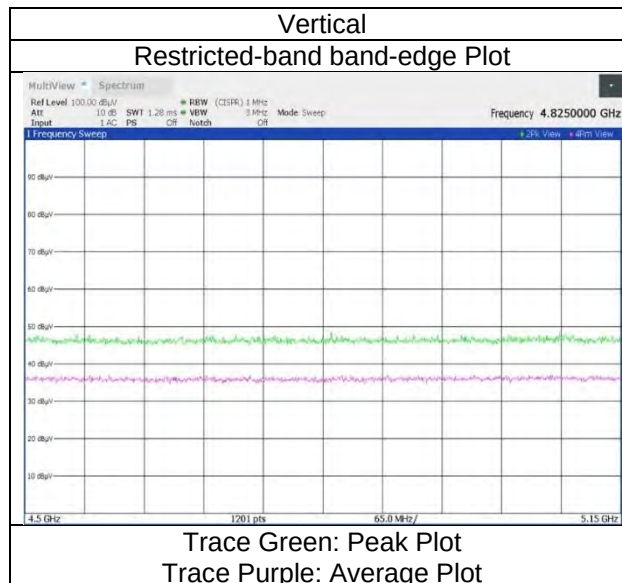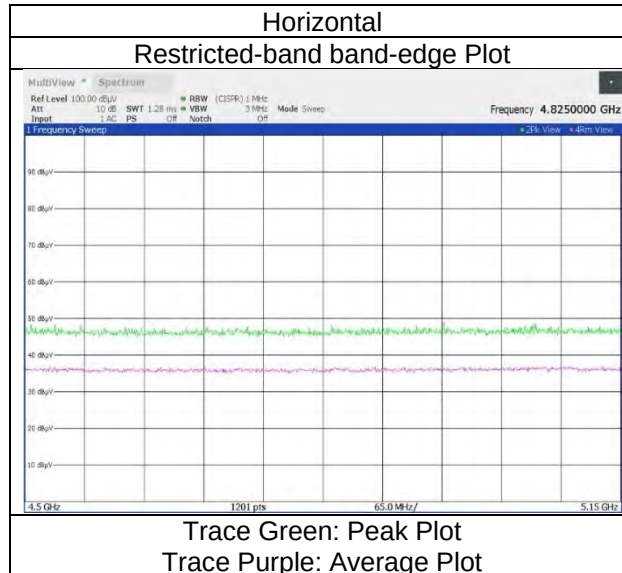

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5230 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Distance Fac.	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	15690.000	PK	47.12	39.72	-27.54	-	-9.54	49.76	73.9	24.1	150	0	Floor Noise
Hori.	20920.010	PK	51.32	33.16	12.84	51.19	-9.54	36.59	73.9	37.3	140	273	-
Hori.	15690.000	AV	35.83	39.72	-27.54	-	-9.54	38.47	53.9	15.4	150	0	Floor Noise
Hori.	20920.010	AV	46.02	33.16	12.84	51.19	-9.54	31.29	53.9	22.6	140	273	-
Vert.	15690.000	PK	47.25	39.72	-27.54	-	-9.54	49.89	73.9	24.0	150	0	Floor Noise
Vert.	20920.010	PK	51.29	33.16	12.84	51.19	-9.54	36.56	73.9	37.3	167	14	-
Vert.	15690.000	AV	35.87	39.72	-27.54	-	-9.54	38.51	53.9	15.3	150	0	Floor Noise
Vert.	20920.010	AV	45.44	33.16	12.84	51.19	-9.54	30.71	53.9	23.1	167	14	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Duty Fac.	Distance Fac.	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	6973.339	PK	50.45	35.94	-34.73	-	-	2.22	53.88	-41.35	-27.0	14.3	385	335	-
Hori.	10460.000	PK	46.42	36.59	-30.11	-	-	-9.54	43.36	-51.87	-27.0	24.8	150	0	Floor Noise
Vert.	6973.338	PK	50.58	35.94	-34.73	-	-	2.22	54.01	-41.22	-27.0	14.2	398	357	-
Vert.	10460.000	PK	46.27	36.59	-30.11	-	-	-9.54	43.21	-52.02	-27.0	25.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5310 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.58	32.52	-26.78	-	2.22	56.54	73.9	17.3	375	8	-
Hori.	10620.000	PK	46.59	37.13	-29.97	-	-9.54	44.21	73.9	29.6	150	0	Floor Noise
Hori.	15930.000	PK	47.04	39.92	-27.80	-	-9.54	49.62	73.9	24.2	150	0	Floor Noise
Hori.	21240.010	PK	52.61	33.28	12.95	51.08	-9.54	38.22	73.9	35.6	159	217	-
Hori.	5350.000	AV	37.69	32.52	-26.78	-	2.22	45.65	53.9	8.2	375	8	-
Hori.	10620.000	AV	35.38	37.13	-29.97	-	-9.54	33.00	53.9	20.9	150	0	Floor Noise
Hori.	15930.000	AV	35.63	39.92	-27.80	-	-9.54	38.21	53.9	15.6	150	0	Floor Noise
Hori.	21240.010	AV	48.75	33.28	12.95	51.08	-9.54	34.36	53.9	19.5	159	217	-
Vert.	5350.000	PK	48.42	32.52	-26.78	-	2.22	56.38	73.9	17.5	378	17	-
Vert.	10620.000	PK	46.75	37.13	-29.97	-	-9.54	44.37	73.9	29.5	150	0	Floor Noise
Vert.	15930.000	PK	47.21	39.92	-27.80	-	-9.54	49.79	73.9	24.1	150	0	Floor Noise
Vert.	21240.010	PK	52.16	33.28	12.95	51.08	-9.54	37.77	73.9	36.1	149	78	-
Vert.	5350.000	AV	37.51	32.52	-26.78	-	2.22	45.47	53.9	8.4	378	17	-
Vert.	10620.000	AV	35.49	37.13	-29.97	-	-9.54	33.11	53.9	20.7	150	0	Floor Noise
Vert.	15930.000	AV	35.39	39.92	-27.80	-	-9.54	37.97	53.9	15.9	150	0	Floor Noise
Vert.	21240.010	AV	46.64	33.28	12.95	51.08	-9.54	32.25	53.9	21.6	149	78	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7080.005	PK	49.47	35.88	-34.63	-	-	2.22	52.94	-42.29	-27.0	15.2	389	336	-
Vert.	7080.005	PK	49.95	35.88	-34.63	-	-	2.22	53.42	-41.81	-27.0	14.8	400	2	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG} ((10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : 3 [m]}) \wedge 2 / 30 * 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5310 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

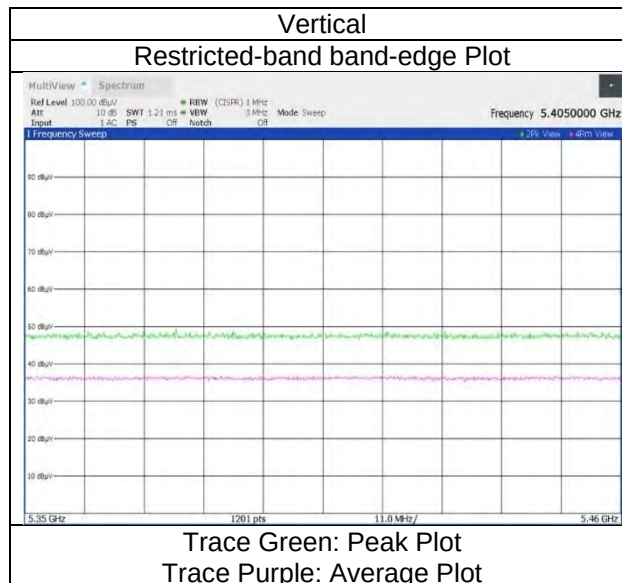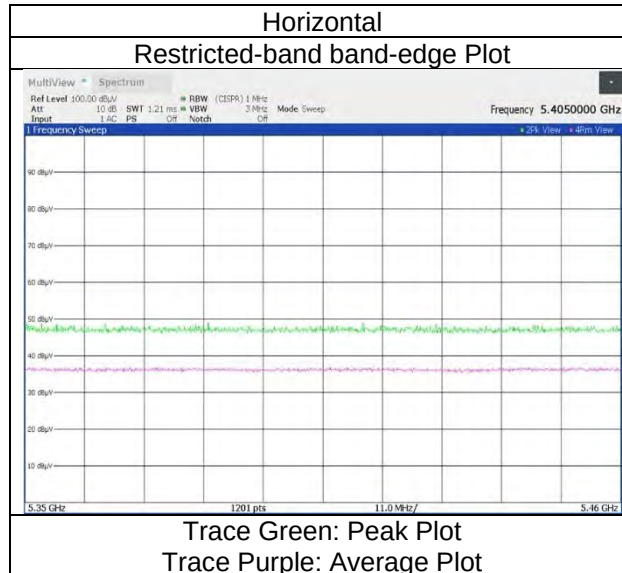

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5510 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11020.000	PK	45.96	37.36	-29.74	-	-9.54	44.04	73.9	29.8	150	234	-
Hori.	22040.020	PK	54.86	33.40	13.18	51.04	-9.54	40.86	73.9	33.0	171	262	-
Hori.	5460.000	AV	37.51	32.98	-26.65	-	2.22	46.06	53.9	7.8	393	6	-
Hori.	11020.000	AV	35.12	37.36	-29.74	-	-9.54	33.20	53.9	20.7	150	234	-
Hori.	22040.020	AV	51.78	33.40	13.18	51.04	-9.54	37.78	53.9	16.1	171	262	-
Vert.	11020.000	PK	45.57	37.36	-29.74	-	-9.54	43.65	73.9	30.2	150	215	-
Vert.	22040.020	PK	52.37	33.40	13.18	51.04	-9.54	38.37	73.9	35.5	141	44	-
Vert.	5460.000	AV	37.51	32.98	-26.65	-	2.22	46.06	53.9	7.8	265	16	-
Vert.	11020.000	AV	34.95	37.36	-29.74	-	-9.54	33.03	53.9	20.8	150	215	-
Vert.	22040.020	AV	48.01	33.40	13.18	51.04	-9.54	34.01	53.9	19.8	141	44	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.81	32.98	-26.65	-	-	2.22	57.36	-37.87	-27.0	10.8	393	6	-
Hori.	5470.000	PK	48.62	33.04	-26.64	-	-	2.22	57.24	-37.99	-27.0	10.9	393	6	-
Hori.	16530.000	PK	46.92	39.85	-26.67	-	-	-9.54	50.56	-44.67	-27.0	17.6	150	143	-
Vert.	5460.000	PK	49.19	32.98	-26.65	-	-	2.22	57.74	-37.49	-27.0	10.4	265	16	-
Vert.	5470.000	PK	48.01	33.04	-26.64	-	-	2.22	56.63	-38.60	-27.0	11.6	265	16	-
Vert.	16530.000	PK	47.28	39.85	-26.67	-	-	-9.54	50.92	-44.31	-27.0	17.3	150	344	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10^{\wedge}(\text{Result [dBuV/m]} / 20) * 10^{\wedge}(-6) * \text{Distance : } 3[m])^{\wedge}2 / 30 * 10^{\wedge}3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5510 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

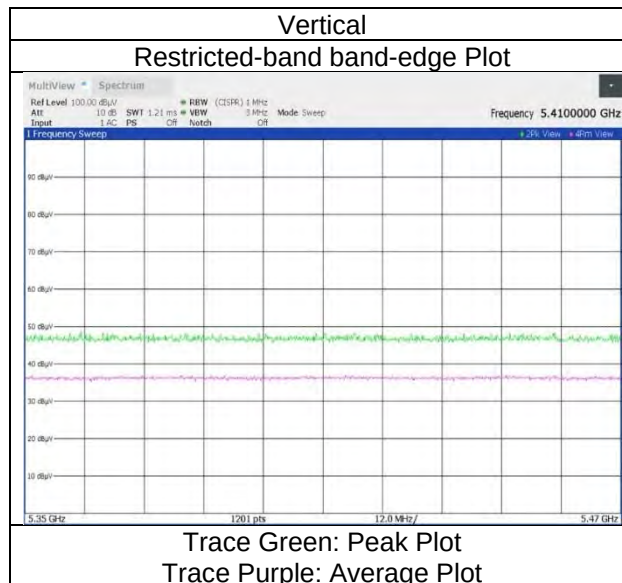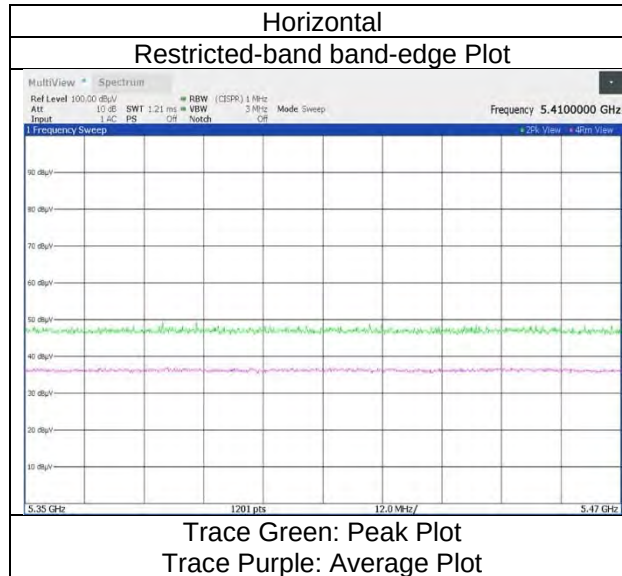

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5590 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	11180.000	PK	46.44	37.46	-29.66	-	-9.54	44.70	73.9	29.2	150	0	Floor Noise
Hori.	22360.000	PK	51.54	33.54	13.32	50.91	-9.54	37.95	73.9	35.9	154	265	-
Hori.	11180.000	AV	35.23	37.46	-29.66	-	-9.54	33.49	53.9	20.4	150	0	Floor Noise
Hori.	22360.000	AV	46.54	33.54	13.32	50.91	-9.54	32.95	53.9	20.9	154	265	-
Vert.	11180.000	PK	46.20	37.46	-29.66	-	-9.54	44.46	73.9	29.4	150	0	Floor Noise
Vert.	22360.000	PK	52.01	33.54	13.32	50.91	-9.54	38.42	73.9	35.4	146	180	-
Vert.	11180.000	AV	35.24	37.46	-29.66	-	-9.54	33.50	53.9	20.4	150	0	Floor Noise
Vert.	22360.000	AV	47.06	33.54	13.32	50.91	-9.54	33.47	53.9	20.4	146	180	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Duty	Distance	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	16770.000	PK	46.69	39.36	-26.42	-	-	-9.54	50.09	-45.14	-27.0	18.1	150	0	Floor Noise
Vert.	16770.000	PK	46.21	39.36	-26.42	-	-	-9.54	49.61	-45.62	-27.0	18.6	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10 * (Result [dBuV/m] / 20) * 10^{-6} * Distance : 3 [m])^2 / 30 * 10^{-3})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5670 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11340.000	PK	45.81	37.77	-29.55	-	-9.54	44.49	73.9	29.4	150	0	Floor Noise
Hori.	22680.010	PK	51.52	33.66	13.43	50.75	-9.54	38.32	73.9	35.5	154	222	-
Hori.	11340.000	AV	34.49	37.77	-29.55	-	-9.54	33.17	53.9	20.7	150	0	Floor Noise
Hori.	22680.010	AV	46.85	33.66	13.43	50.75	-9.54	33.65	53.9	20.2	154	222	-
Vert.	11340.000	PK	45.90	37.77	-29.55	-	-9.54	44.58	73.9	29.3	150	0	Floor Noise
Vert.	22680.010	PK	50.43	33.66	13.43	50.75	-9.54	37.23	73.9	36.6	150	10	-
Vert.	11340.000	AV	34.76	37.77	-29.55	-	-9.54	33.44	53.9	20.4	150	0	Floor Noise
Vert.	22680.010	AV	45.55	33.66	13.43	50.75	-9.54	32.35	53.9	21.5	150	10	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.86	33.67	-26.57	-	-	2.22	58.18	-37.05	-27.0	10.0	392	6	-
Hori.	17010.000	PK	47.20	39.63	-26.17	-	-	-9.54	51.12	-44.11	-27.0	17.1	150	0	Floor Noise
Vert.	5725.000	PK	48.96	33.67	-26.57	-	-	2.22	58.28	-36.95	-27.0	9.9	275	15	-
Vert.	17010.000	PK	47.23	39.63	-26.17	-	-	-9.54	51.15	-44.08	-27.0	17.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{\frac{1}{10}} * \text{Result [dBuV/m]} / 20) * 10^{\frac{1}{10}} * (-6) * \text{Distance : } 3[m])^2 / 30 * 10^{\frac{1}{10}} * 3$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

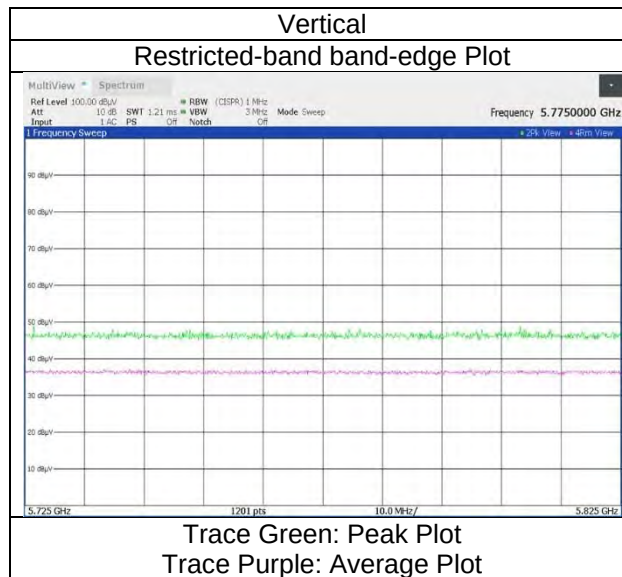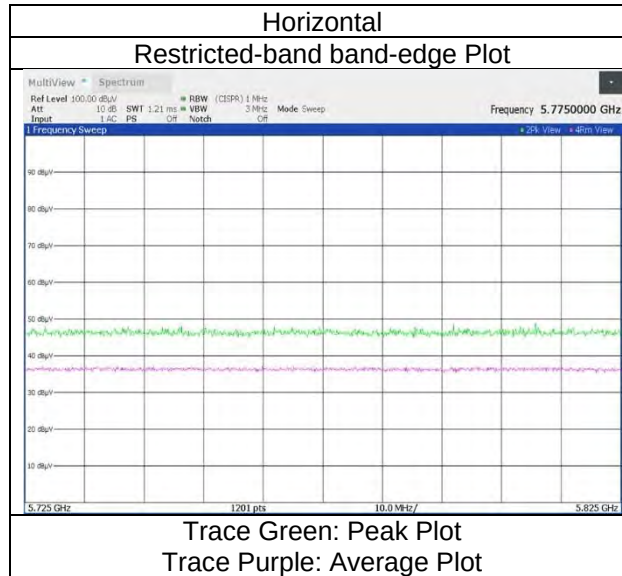

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5755 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hirromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11510.000	PK	46.16	37.99	-29.47	-	-9.54	45.14	73.9	28.7	150	0	Floor Noise
Hori.	23020.010	PK	51.18	33.71	13.53	50.59	-9.54	38.29	73.9	35.6	154	268	-
Hori.	11510.000	AV	35.37	37.99	-29.47	-	-9.54	34.35	53.9	19.5	150	0	Floor Noise
Hori.	23020.010	AV	46.89	33.71	13.53	50.59	-9.54	34.00	53.9	19.9	154	268	-
Vert.	11510.000	PK	47.05	37.99	-29.47	-	-9.54	46.03	73.9	27.8	150	0	Floor Noise
Vert.	23020.010	PK	51.14	33.71	13.53	50.59	-9.54	38.25	73.9	35.6	146	65	-
Vert.	11510.000	AV	35.35	37.99	-29.47	-	-9.54	34.33	53.9	19.5	150	0	Floor Noise
Vert.	23020.010	AV	46.30	33.71	13.53	50.59	-9.54	33.41	53.9	20.4	146	65	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.35	33.66	-26.58	-	-	2.22	57.65	-37.58	-27.0	10.5	288	6	-
Hori.	5700.000	PK	48.99	33.69	-26.58	-	-	2.22	58.32	-36.91	10.0	46.9	288	6	-
Hori.	5720.000	PK	48.58	33.66	-26.58	-	-	2.22	57.88	-37.35	15.6	52.9	288	6	-
Hori.	5725.000	PK	48.33	33.67	-26.57	-	-	2.22	57.65	-37.58	27.0	64.5	288	6	-
Hori.	17265.000	PK	46.11	40.17	-25.91	-	-	-9.54	50.83	-44.40	-27.0	17.4	150	0	Floor Noise
Vert.	5650.000	PK	48.52	33.66	-26.58	-	-	2.22	57.82	-37.41	-27.0	10.4	296	17	-
Vert.	5700.000	PK	48.16	33.69	-26.58	-	-	2.22	57.49	-37.74	10.0	47.7	296	17	-
Vert.	5720.000	PK	48.77	33.66	-26.58	-	-	2.22	58.07	-37.16	15.6	52.7	296	17	-
Vert.	5725.000	PK	49.31	33.67	-26.57	-	-	2.22	58.63	-36.60	27.0	63.6	296	17	-
Vert.	17265.000	PK	46.71	40.17	-25.91	-	-	-9.54	51.43	-43.80	-27.0	16.8	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(\text{Result [dBuV/m]} / 20)}) * 10^{(-6)} * \text{Distance : } 3\text{ [m]})^2 / 30 * 10^{(3)})$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5755 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

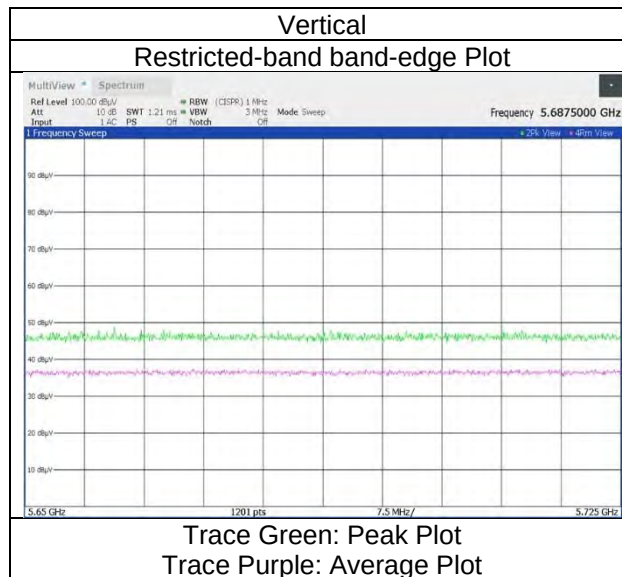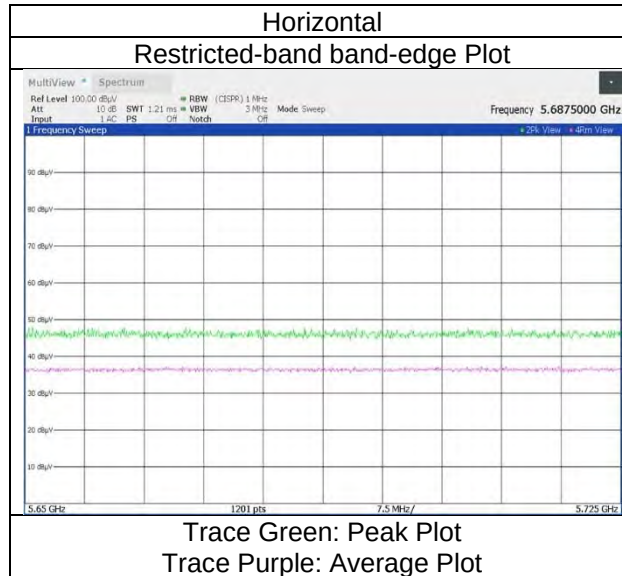

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	20 deg. C	40 % RH	Makoto Hosaka	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11590.000	PK	46.17	38.06	-29.44	-	-9.54	45.25	73.9	28.6	150	0	Floor Noise
Hori.	11590.000	AV	34.80	38.06	-29.44	-	-9.54	33.88	53.9	20.0	150	0	Floor Noise
Vert.	11590.000	PK	45.55	38.06	-29.44	-	-9.54	44.63	73.9	29.2	150	0	Floor Noise
Vert.	11590.000	AV	34.73	38.06	-29.44	-	-9.54	33.81	53.9	20.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.58	33.70	-26.56	-	-	2.22	57.94	-37.29	27.0	64.2	357	7	-
Hori.	5855.000	PK	48.42	33.71	-26.56	-	-	2.22	57.79	-37.44	15.6	53.0	357	7	-
Hori.	5875.000	PK	48.35	33.73	-26.54	-	-	2.22	57.76	-37.47	10.0	47.4	357	7	-
Hori.	5925.000	PK	49.13	33.85	-26.53	-	-	2.22	58.67	-36.56	-27.0	9.5	357	7	-
Hori.	17385.000	PK	46.13	40.36	-25.80	-	-	-9.54	51.15	-44.08	-27.0	17.0	150	0	Floor Noise
Hori.	23180.030	PK	52.79	33.75	13.57	50.66	-	-9.54	39.91	-55.32	-27.0	28.3	133	260	-
Vert.	5850.000	PK	49.03	33.70	-26.56	-	-	2.22	58.39	-36.84	27.0	63.8	299	16	-
Vert.	5855.000	PK	48.29	33.71	-26.56	-	-	2.22	57.66	-37.57	15.6	53.1	299	16	-
Vert.	5875.000	PK	48.66	33.73	-26.54	-	-	2.22	58.07	-37.16	10.0	47.1	299	16	-
Vert.	5925.000	PK	47.98	33.85	-26.53	-	-	2.22	57.52	-37.71	-27.0	10.7	299	16	-
Vert.	17385.000	PK	46.06	40.36	-25.80	-	-	-9.54	51.08	-44.15	-27.0	17.1	150	0	Floor Noise
Vert.	23180.030	PK	51.97	33.75	13.57	50.66	-	-9.54	39.09	-56.14	-27.0	29.1	158	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)}) * 10^{(-6)} * \text{Distance} : 3 [m])^2 / 30 * 10^{(3)})$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDM), MIMO 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 08, 2026	WAC2	21 deg. C	35 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

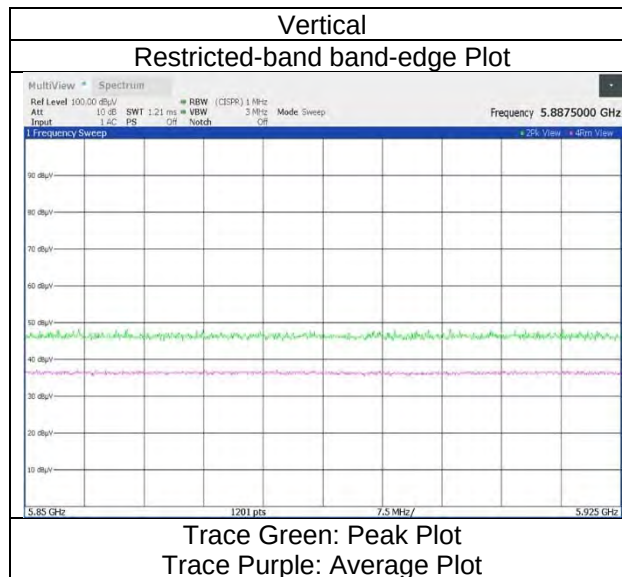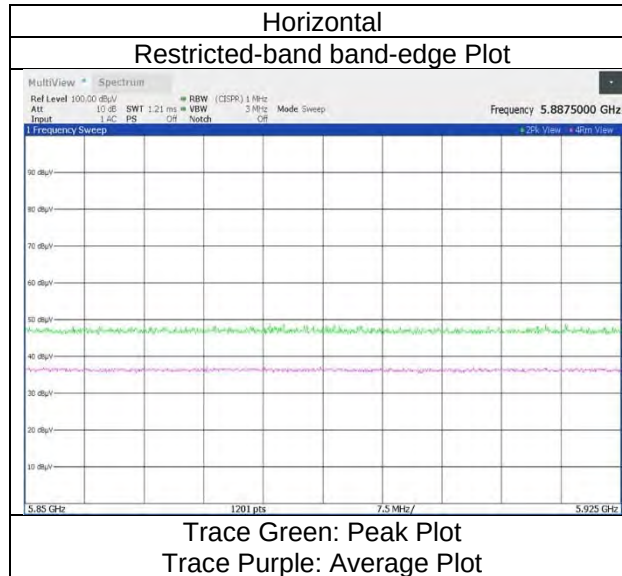

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 0, MIMO 5190 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.99	32.61	-27.03	-	2.22	56.79	73.9	17.1	398	5	-
Hori.	5150.000	AV	37.56	32.61	-27.03	-	2.22	45.36	53.9	8.5	398	5	-
Vert.	5150.000	PK	48.42	32.61	-27.03	-	2.22	56.22	73.9	17.6	385	354	-
Vert.	5150.000	AV	37.62	32.61	-27.03	-	2.22	45.42	53.9	8.4	385	354	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

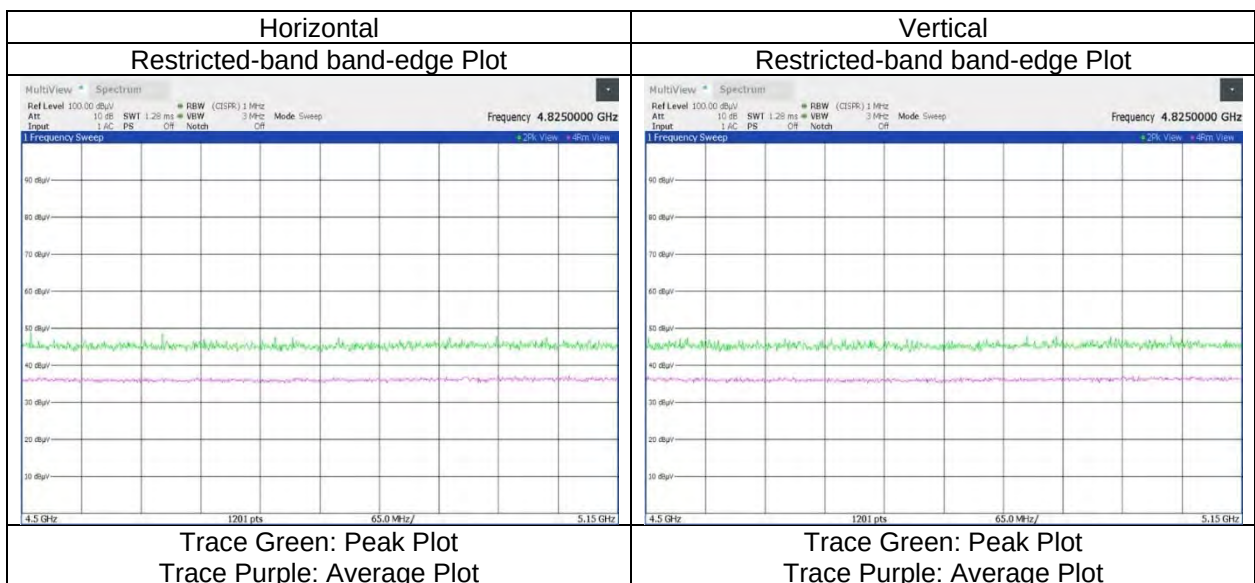

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 17, MIMO 5310 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.38	32.52	-26.78	-	2.22	56.34	73.9	17.5	376	348	-
Hori.	5350.000	AV	37.38	32.52	-26.78	-	2.22	45.34	53.9	8.5	376	348	-
Vert.	5350.000	PK	48.55	32.52	-26.78	-	2.22	56.51	73.9	17.3	387	337	-
Vert.	5350.000	AV	37.39	32.52	-26.78	-	2.22	45.35	53.9	8.5	387	337	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

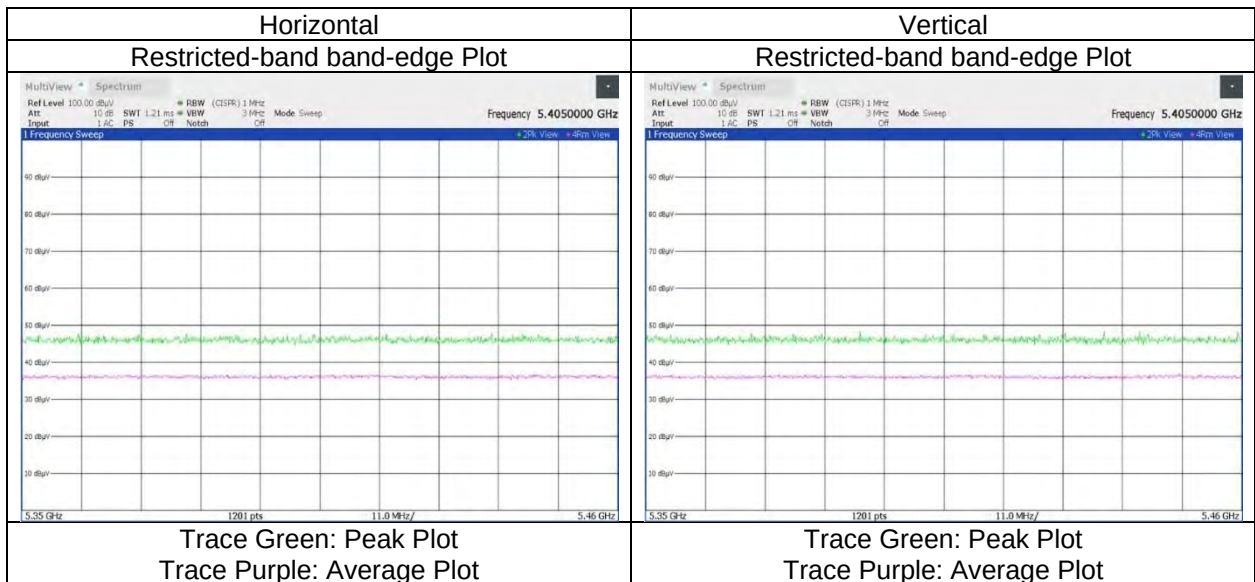

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 0, MIMO 5510 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.23	32.98	-26.65	-	2.22	45.78	53.9	8.1	395	0	-
Vert.	5460.000	AV	37.48	32.98	-26.65	-	2.22	46.03	53.9	7.8	329	8	-

Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.48	32.98	-26.65	-	-	2.22	57.03	-38.20	-27.0	11.2	395	0	-
Hori.	5470.000	PK	48.66	33.04	-26.64	-	-	2.22	57.28	-37.95	-27.0	10.9	395	0	-
Vert.	5460.000	PK	48.44	32.98	-26.65	-	-	2.22	56.99	-38.24	-27.0	11.2	329	8	-
Vert.	5470.000	PK	48.23	33.04	-26.64	-	-	2.22	56.85	-38.38	-27.0	11.3	329	8	-


Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

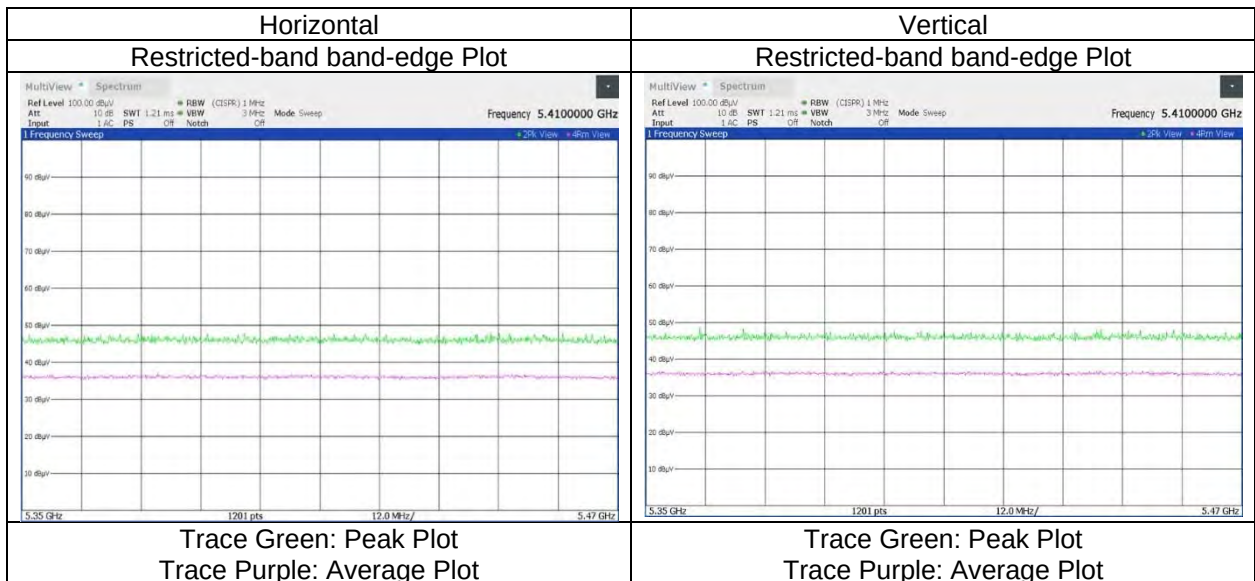

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 17, MIMO 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)															
Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Duty Fac.	Distance Fac.	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	5725.000	PK	48.43	33.67	-26.57	-	-	2.22	57.75	-37.48	-27.0	10.4	397	351	-
Vert.	5725.000	PK	48.33	33.67	-26.57	-	-	2.22	57.65	-37.58	-27.0	10.5	311	358	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

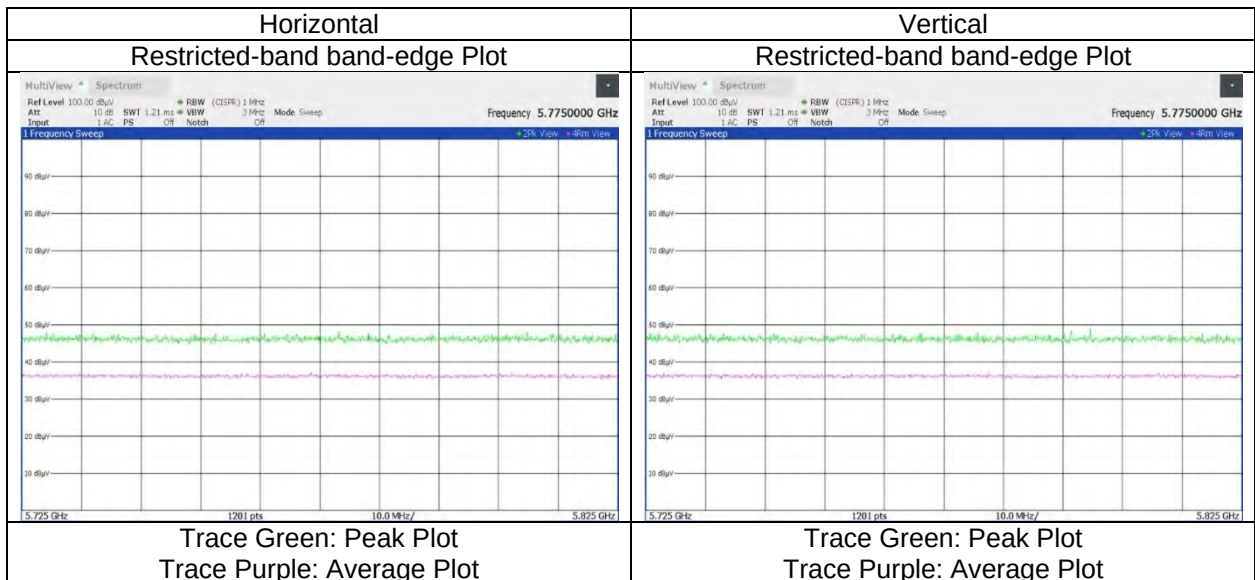

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 0, MIMO 5755 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.66	33.66	-26.58	-	-	2.22	57.96	-37.27	-27.0	10.2	393	1	-
Hori.	5700.000	PK	48.41	33.69	-26.58	-	-	2.22	57.74	-37.49	10.0	47.4	393	1	-
Hori.	5720.000	PK	48.77	33.66	-26.58	-	-	2.22	58.07	-37.16	15.6	52.7	393	1	-
Hori.	5725.000	PK	51.34	33.67	-26.57	-	-	2.22	60.66	-34.57	27.0	61.5	393	1	-
Vert.	5650.000	PK	48.90	33.66	-26.58	-	-	2.22	58.20	-37.03	-27.0	10.0	349	9	-
Vert.	5700.000	PK	48.60	33.69	-26.58	-	-	2.22	57.93	-37.30	10.0	47.3	349	9	-
Vert.	5720.000	PK	48.34	33.66	-26.58	-	-	2.22	57.64	-37.59	15.6	53.1	349	9	-
Vert.	5725.000	PK	51.98	33.67	-26.57	-	-	2.22	61.30	-33.93	27.0	60.9	349	9	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

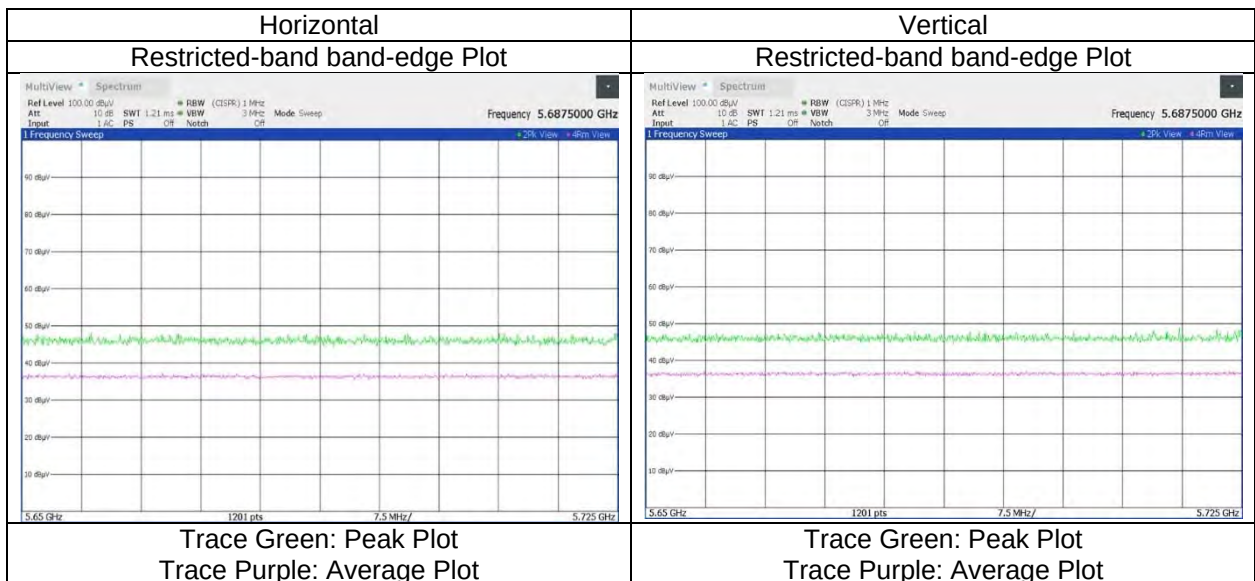

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 26-tone RU, RU Index 17, MIMO 5795 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	48.37	33.70	-26.56	-	-	2.22	57.73	-37.50	27.0	64.5	388	348	-	
Hori.	5855.000	PK	48.26	33.71	-26.56	-	-	2.22	57.63	-37.60	15.6	53.2	388	348	-	
Hori.	5875.000	PK	48.57	33.73	-26.54	-	-	2.22	57.98	-37.25	10.0	47.2	388	348	-	
Hori.	5925.000	PK	48.23	33.85	-26.53	-	-	2.22	57.77	-37.46	-27.0	10.4	388	348	-	
Vert.	5850.000	PK	48.52	33.70	-26.56	-	-	2.22	57.88	-37.35	27.0	64.3	358	359	-	
Vert.	5855.000	PK	48.27	33.71	-26.56	-	-	2.22	57.64	-37.59	15.6	53.1	358	359	-	
Vert.	5875.000	PK	48.44	33.73	-26.54	-	-	2.22	57.85	-37.38	10.0	47.3	358	359	-	
Vert.	5925.000	PK	48.29	33.85	-26.53	-	-	2.22	57.83	-37.40	-27.0	10.4	358	359	-	


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

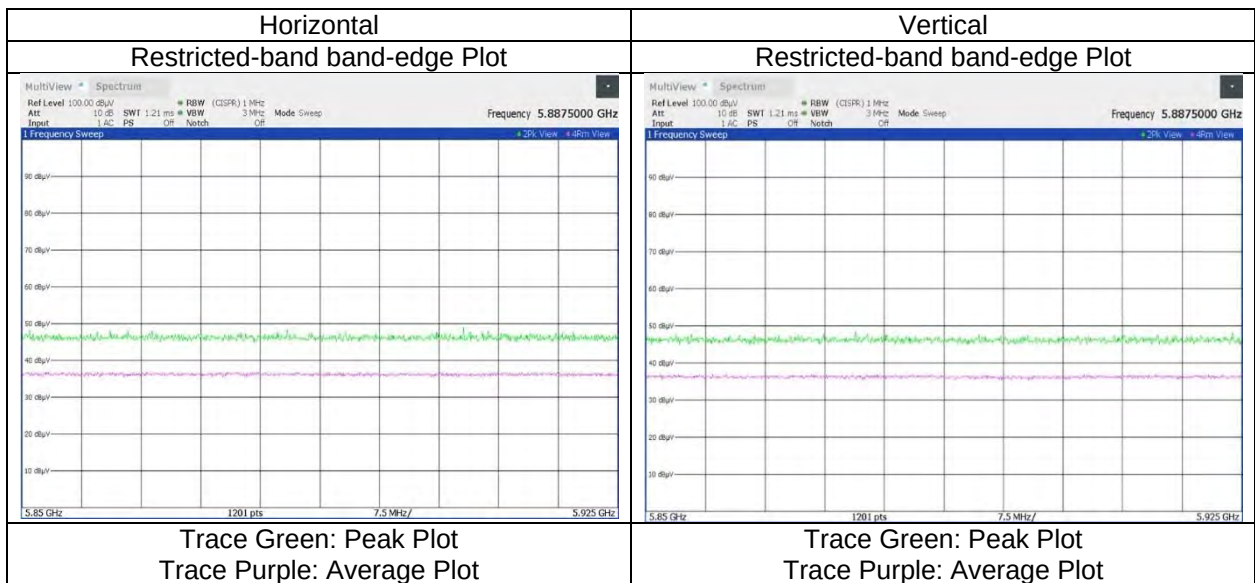

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 37, MIMO 5190 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	19 deg. C	40 % RH	Masahide Ozaki	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.30	32.61	-27.03	-	2.22	56.10	73.9	17.8	397	2	-
Hori.	5150.000	AV	37.68	32.61	-27.03	-	2.22	45.48	53.9	8.4	397	2	-
Vert.	5150.000	PK	48.25	32.61	-27.03	-	2.22	56.05	73.9	17.8	373	12	-
Vert.	5150.000	AV	37.40	32.61	-27.03	-	2.22	45.20	53.9	8.7	373	12	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 44, MIMO 5310 MHz
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.67	32.52	-26.78	-	2.22	56.63	73.9	17.2	396	350	-
Hori.	5350.000	AV	37.63	32.52	-26.78	-	2.22	45.59	53.9	8.3	396	350	-
Vert.	5350.000	PK	48.66	32.52	-26.78	-	2.22	56.62	73.9	17.2	381	342	-
Vert.	5350.000	AV	37.74	32.52	-26.78	-	2.22	45.70	53.9	8.2	381	342	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

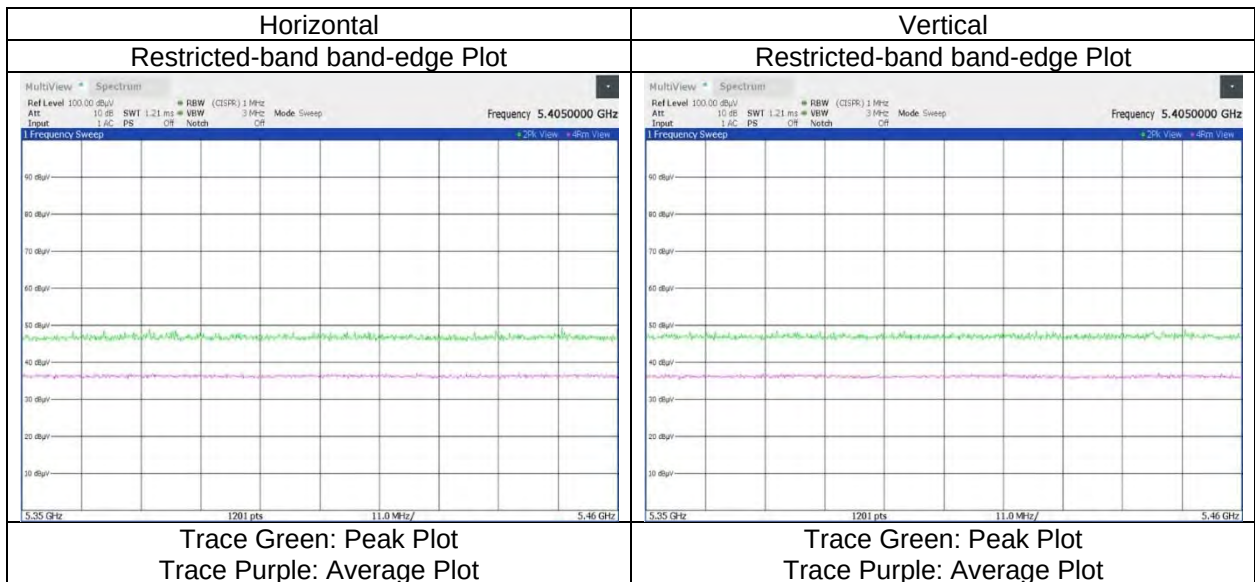

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 37, MIMO 5510 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.70	32.98	-26.65	-	2.22	46.25	53.9	7.6	351	0	-
Vert.	5460.000	AV	37.45	32.98	-26.65	-	2.22	46.00	53.9	7.9	368	345	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5461.000	PK	49.07	32.98	-26.65	-	-	2.22	57.62	-37.61	-27.0	10.6	351	0	-
Hori.	5470.000	PK	49.21	33.04	-26.64	-	-	2.22	57.83	-37.40	-27.0	10.4	351	0	-
Vert.	5461.000	PK	48.20	32.98	-26.65	-	-	2.22	56.75	-38.48	-27.0	11.4	368	345	-
Vert.	5470.000	PK	48.54	33.04	-26.64	-	-	2.22	57.16	-38.07	-27.0	11.0	368	345	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{-3})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

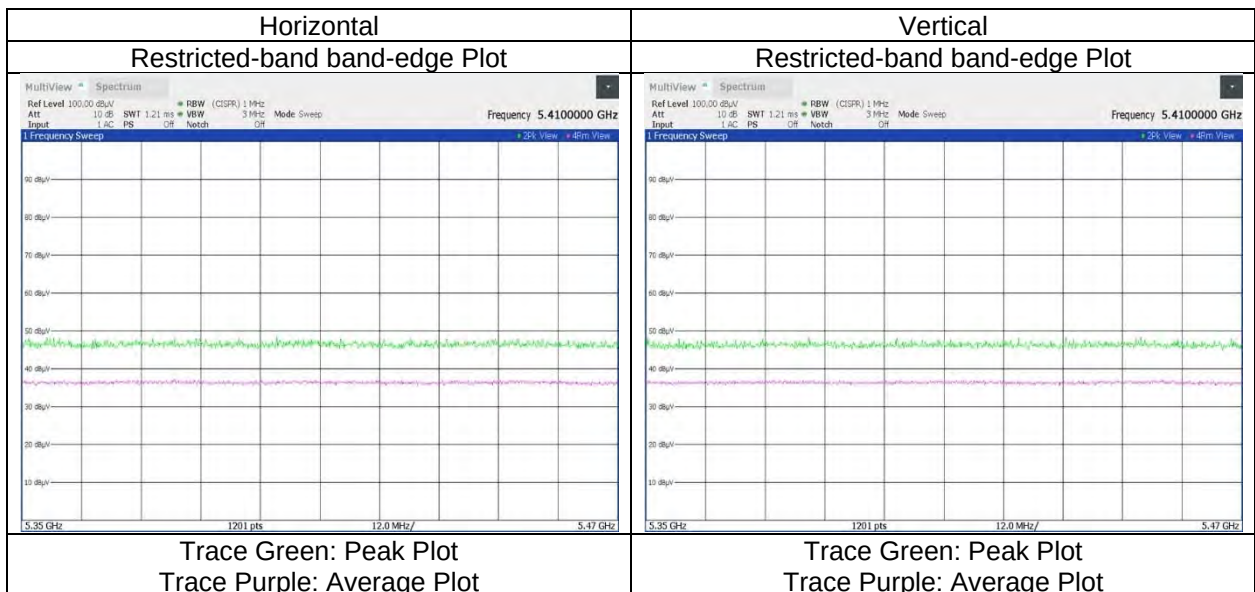

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 44, MIMO 5670 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)															
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.78	33.67	-26.57	-	-	2.22	58.10	-37.13	-27.0	10.1	370	348	-
Vert.	5725.000	PK	49.23	33.67	-26.57	-	-	2.22	58.55	-36.68	-27.0	9.6	325	3	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

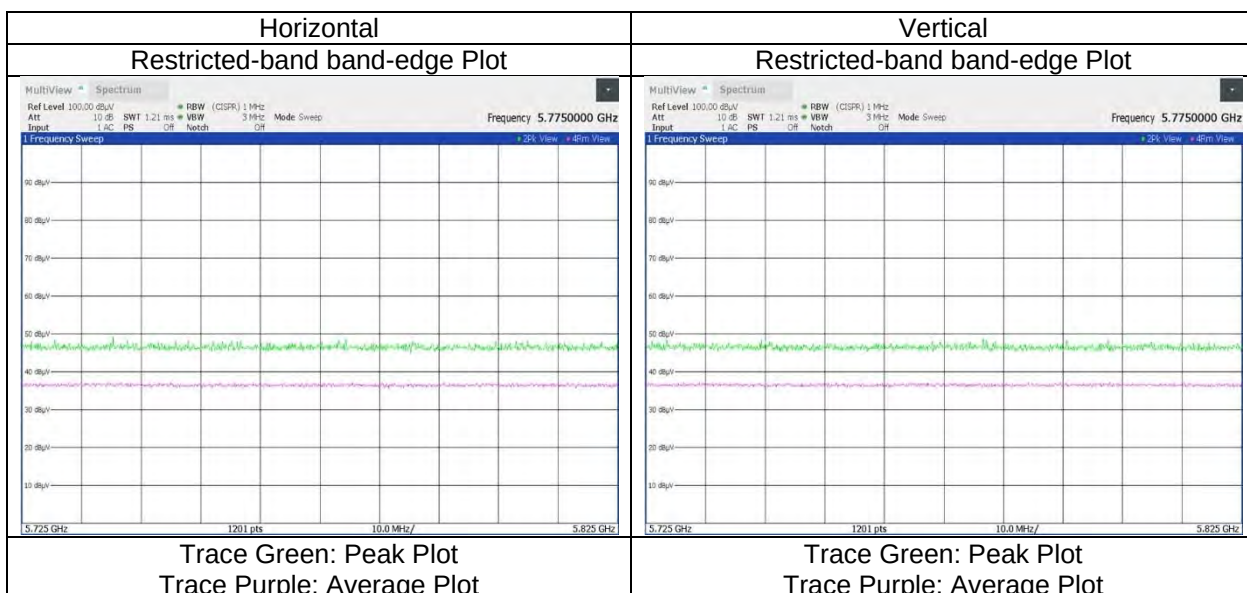

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 37, MIMO 5755 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.41	33.66	-26.58	-	-	2.22	57.71	-37.52	-27.0	10.5	384	1	-
Hori.	5700.000	PK	48.85	33.69	-26.58	-	-	2.22	58.18	-37.05	10.0	47.0	384	1	-
Hori.	5720.000	PK	48.57	33.66	-26.58	-	-	2.22	57.87	-37.36	15.6	52.9	384	1	-
Hori.	5725.000	PK	49.52	33.67	-26.57	-	-	2.22	58.84	-36.39	27.0	63.3	384	1	-
Vert.	5650.000	PK	48.75	33.66	-26.58	-	-	2.22	58.05	-37.18	-27.0	10.1	349	8	-
Vert.	5700.000	PK	48.65	33.69	-26.58	-	-	2.22	57.98	-37.25	10.0	47.2	349	8	-
Vert.	5720.000	PK	48.78	33.66	-26.58	-	-	2.22	58.08	-37.15	15.6	52.7	349	8	-
Vert.	5725.000	PK	50.54	33.67	-26.57	-	-	2.22	59.86	-35.37	27.0	62.3	349	8	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

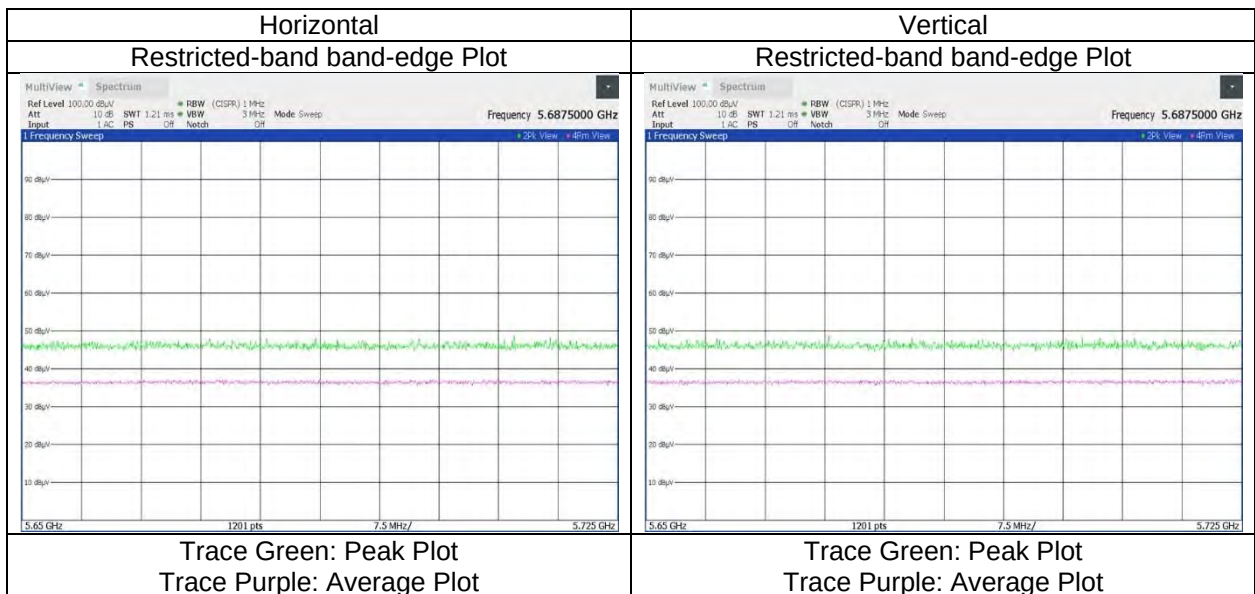

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 52-tone RU, RU Index 44, MIMO 5795 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.80	33.70	-26.56	-	-	2.22	58.16	-37.07	27.0	64.0	371	349	-
Hori.	5855.000	PK	49.08	33.71	-26.56	-	-	2.22	58.45	-36.78	15.6	52.3	371	349	-
Hori.	5875.000	PK	48.34	33.73	-26.54	-	-	2.22	57.75	-37.48	10.0	47.4	371	349	-
Hori.	5925.000	PK	48.78	33.85	-26.53	-	-	2.22	58.32	-36.91	-27.0	9.9	371	349	-
Vert.	5850.000	PK	48.67	33.70	-26.56	-	-	2.22	58.03	-37.20	27.0	64.2	382	4	-
Vert.	5855.000	PK	48.33	33.71	-26.56	-	-	2.22	57.70	-37.53	15.6	53.1	382	4	-
Vert.	5875.000	PK	49.14	33.73	-26.54	-	-	2.22	58.55	-36.68	10.0	46.6	382	4	-
Vert.	5925.000	PK	49.02	33.85	-26.53	-	-	2.22	58.56	-36.67	-27.0	9.6	382	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

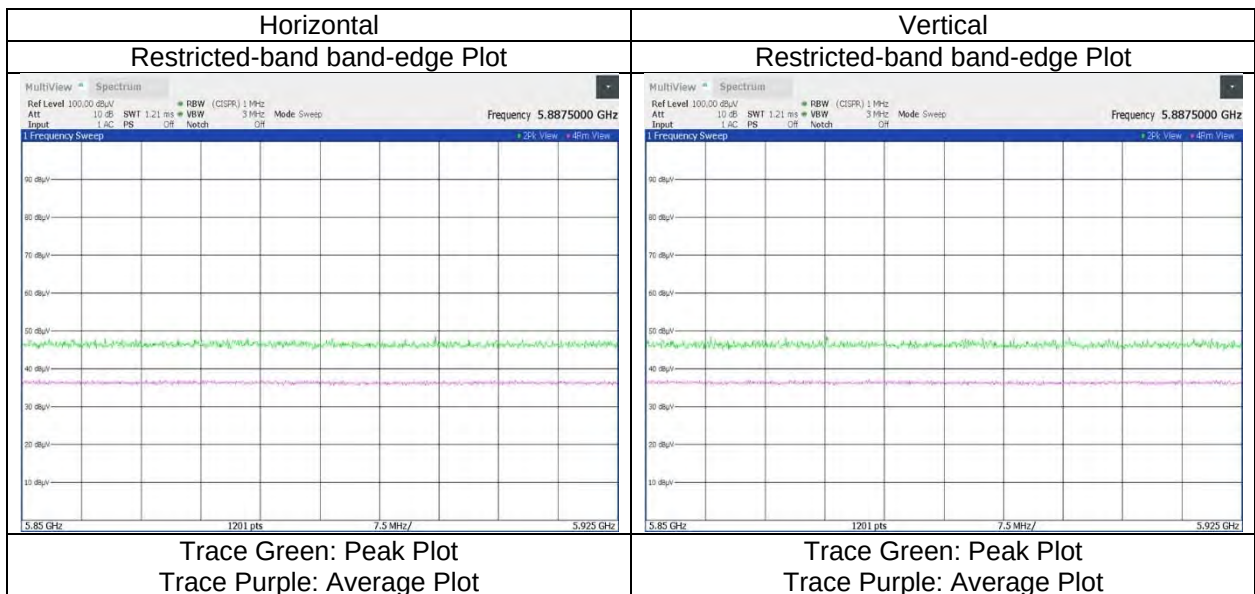

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 53, MIMO 5190 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.89	32.61	-27.03	-	2.22	56.69	73.9	17.2	390	2	-
Hori.	5150.000	AV	37.80	32.61	-27.03	-	2.22	45.60	53.9	8.3	390	2	-
Vert.	5150.000	PK	48.16	32.61	-27.03	-	2.22	55.96	73.9	17.9	373	351	-
Vert.	5150.000	AV	37.67	32.61	-27.03	-	2.22	45.47	53.9	8.4	373	351	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

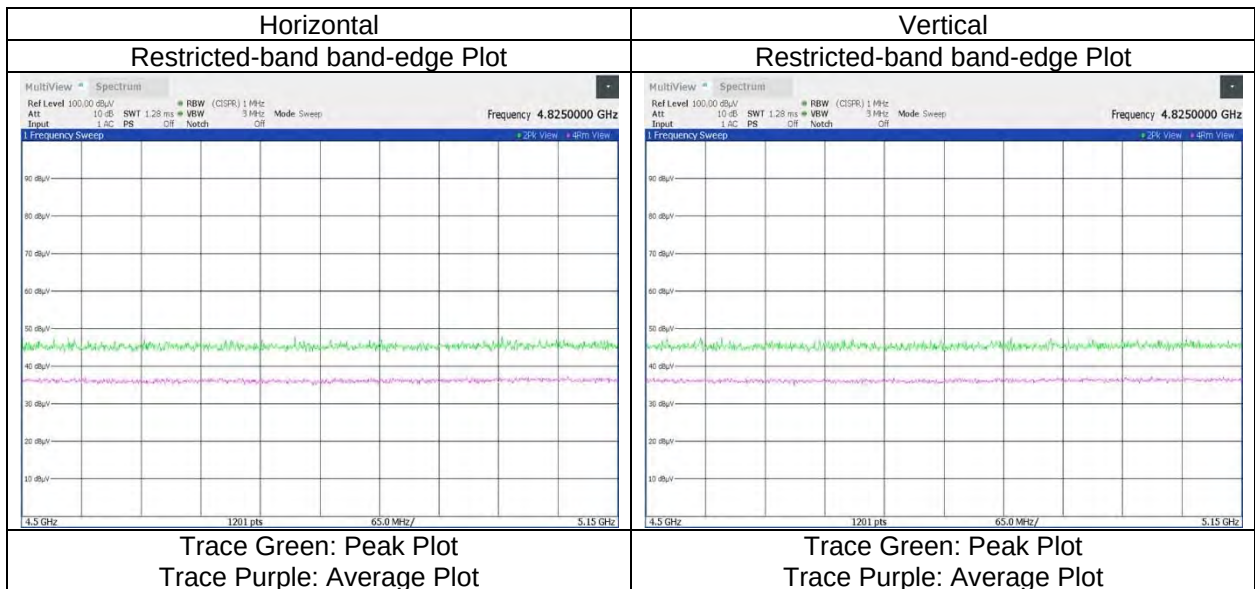

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 56, MIMO 5310 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.34	32.52	-26.78	-	2.22	56.30	73.9	17.6	394	352	-
Hori.	5350.000	AV	37.52	32.52	-26.78	-	2.22	45.48	53.9	8.4	394	352	-
Vert.	5350.000	PK	48.27	32.52	-26.78	-	2.22	56.23	73.9	17.6	385	346	-
Vert.	5350.000	AV	38.07	32.52	-26.78	-	2.22	46.03	53.9	7.8	385	346	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

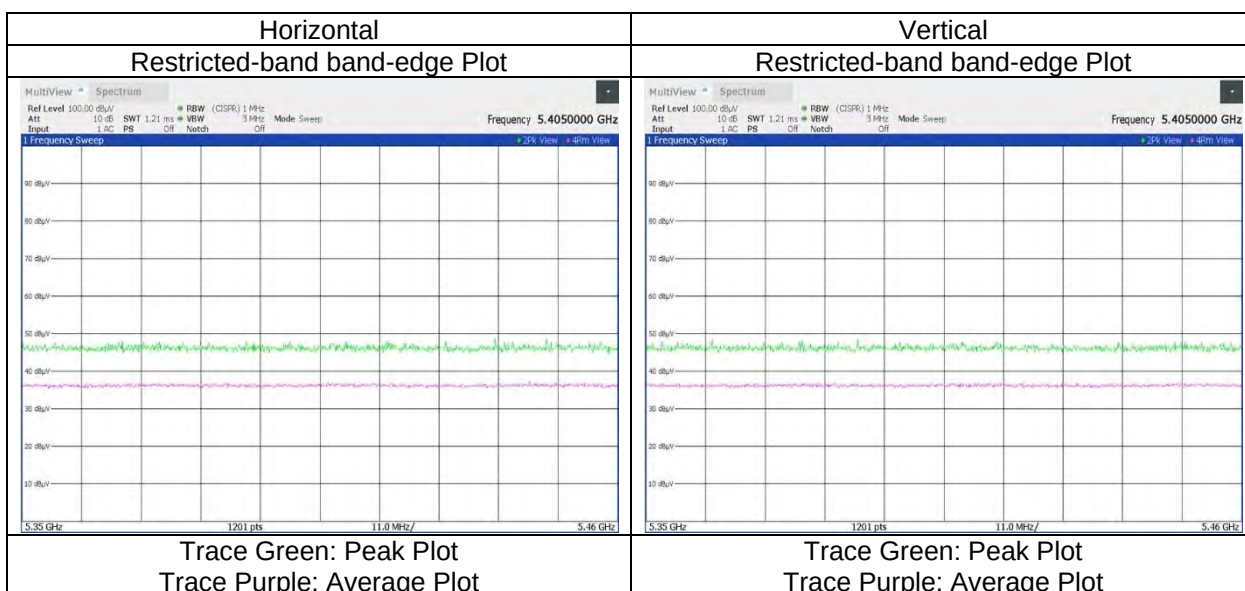

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 53, MIMO 5510 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.77	32.98	-26.65	-	2.22	46.32	53.9	7.5	399	349	-
Vert.	5460.000	AV	37.41	32.98	-26.65	-	2.22	45.96	53.9	7.9	343	349	-

Result = Reading + Ant.Fac. + Loss (Cable + (Athen or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.13	32.98	-26.65	-	-	2.22	56.68	-38.55	-27.0	11.5	399	349	-
Hori.	5470.000	PK	48.86	33.04	-26.64	-	-	2.22	57.48	-37.75	-27.0	10.7	399	349	-
Vert.	5460.000	PK	48.97	32.98	-26.65	-	-	2.22	57.52	-37.71	-27.0	10.7	343	349	-
Vert.	5470.000	PK	48.33	33.04	-26.64	-	-	2.22	56.95	-38.28	-27.0	11.2	343	349	-


Result = Reading + Ant.Fac. + Loss (Cable + (Athen or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

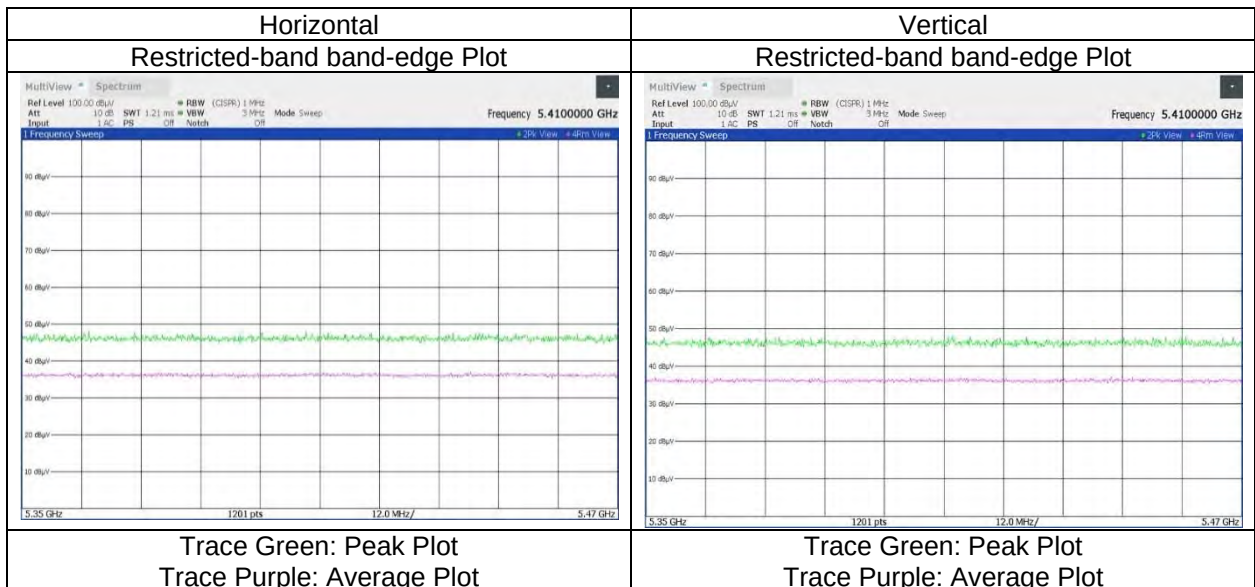

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 56, MIMO 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.64	33.67	-26.57	-	-	2.22	57.96	-37.27	-27.0	10.2	370	349	-
Vert.	5725.000	PK	48.50	33.67	-26.57	-	-	2.22	57.82	-37.41	-27.0	10.4	375	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \text{LOG} \left((10 \wedge (\text{Result [dBuV/m]} / 20)) \cdot 10 \wedge (-6) \cdot \text{Distance} : 3 \text{ [m]} \right) \wedge 2 / 30 \cdot 10 \wedge 3$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\text{log} (3.87 \text{ [m]} / 3.0 \text{ [m]}) = 2.22 \text{ [dB]}$

10 GHz to 40 GHz : $20\text{log} (1.00 \text{ [m]} / 3.0 \text{ [m]}) = -9.54 \text{ [dB]}$

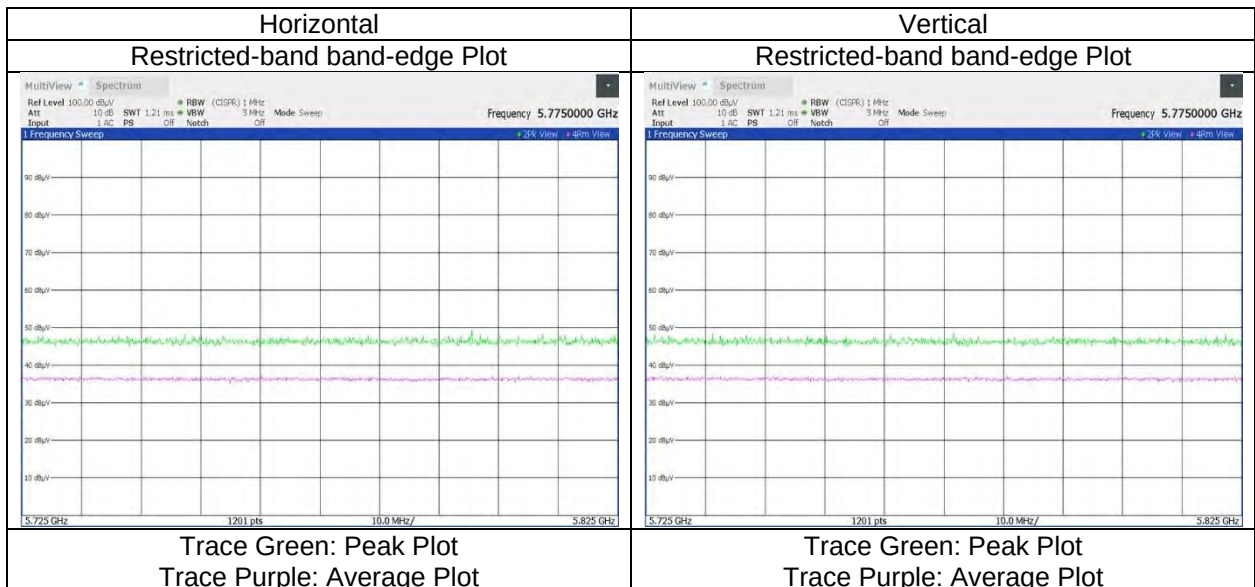

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 53, MIMO 5755 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.11	33.66	-26.58	-	-	2.22	57.41	-37.82	-27.0	10.8	384	1	-
Hori.	5700.000	PK	48.50	33.69	-26.58	-	-	2.22	57.83	-37.40	10.0	47.4	384	1	-
Hori.	5720.000	PK	49.34	33.66	-26.58	-	-	2.22	58.64	-36.59	15.6	52.1	384	1	-
Hori.	5725.000	PK	48.50	33.67	-26.57	-	-	2.22	57.82	-37.41	27.0	64.4	384	1	-
Vert.	5650.000	PK	48.14	33.66	-26.58	-	-	2.22	57.44	-37.79	-27.0	10.7	366	6	-
Vert.	5700.000	PK	48.22	33.69	-26.58	-	-	2.22	57.55	-37.68	10.0	47.6	366	6	-
Vert.	5720.000	PK	48.94	33.66	-26.58	-	-	2.22	58.24	-36.99	15.6	52.5	366	6	-
Vert.	5725.000	PK	49.44	33.67	-26.57	-	-	2.22	58.76	-36.47	27.0	63.4	366	6	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

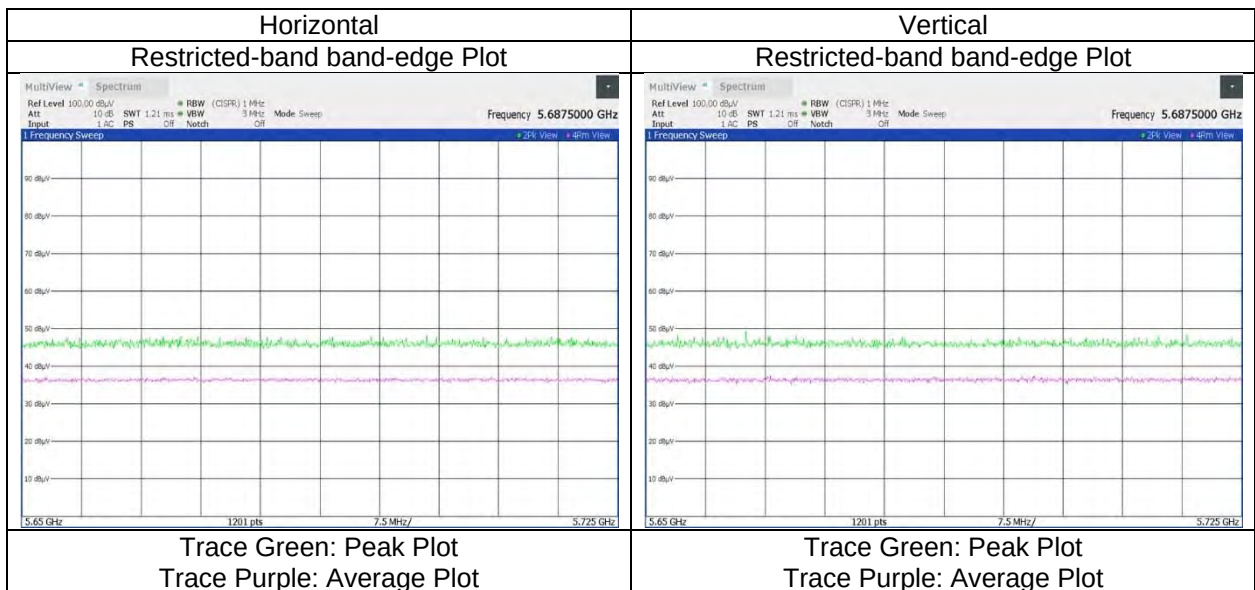

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 106-tone RU, RU Index 56, MIMO 5795 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.97	33.70	-26.56	-	-	2.22	58.33	-36.90	27.0	63.9	371	351	-
Hori.	5855.000	PK	49.10	33.71	-26.56	-	-	2.22	58.47	-36.76	15.6	52.3	371	351	-
Hori.	5875.000	PK	49.11	33.73	-26.54	-	-	2.22	58.52	-36.71	10.0	46.7	371	351	-
Hori.	5925.000	PK	48.72	33.85	-26.53	-	-	2.22	58.26	-36.97	-27.0	9.9	371	351	-
Vert.	5850.000	PK	49.34	33.70	-26.56	-	-	2.22	58.70	-36.53	27.0	63.5	377	4	-
Vert.	5855.000	PK	49.22	33.71	-26.56	-	-	2.22	58.59	-36.64	15.6	52.2	377	4	-
Vert.	5875.000	PK	48.96	33.73	-26.54	-	-	2.22	58.37	-36.86	10.0	46.8	377	4	-
Vert.	5925.000	PK	48.92	33.85	-26.53	-	-	2.22	58.46	-36.77	-27.0	9.7	377	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \log \left((10^{\frac{\text{Result [dBuV/m]}}{20}}) \cdot 10^{-6} \cdot \text{Distance} : 3 [\text{m}] \right)^2 / 30 \cdot 10^{\frac{\text{Ant.Fac. [dB/m]}}{20}}$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20 \log (3.87 [\text{m}] / 3.0 [\text{m}]) = 2.22 [\text{dB}]$

10 GHz to 40 GHz : $20 \log (1.00 [\text{m}] / 3.0 [\text{m}]) = -9.54 [\text{dB}]$

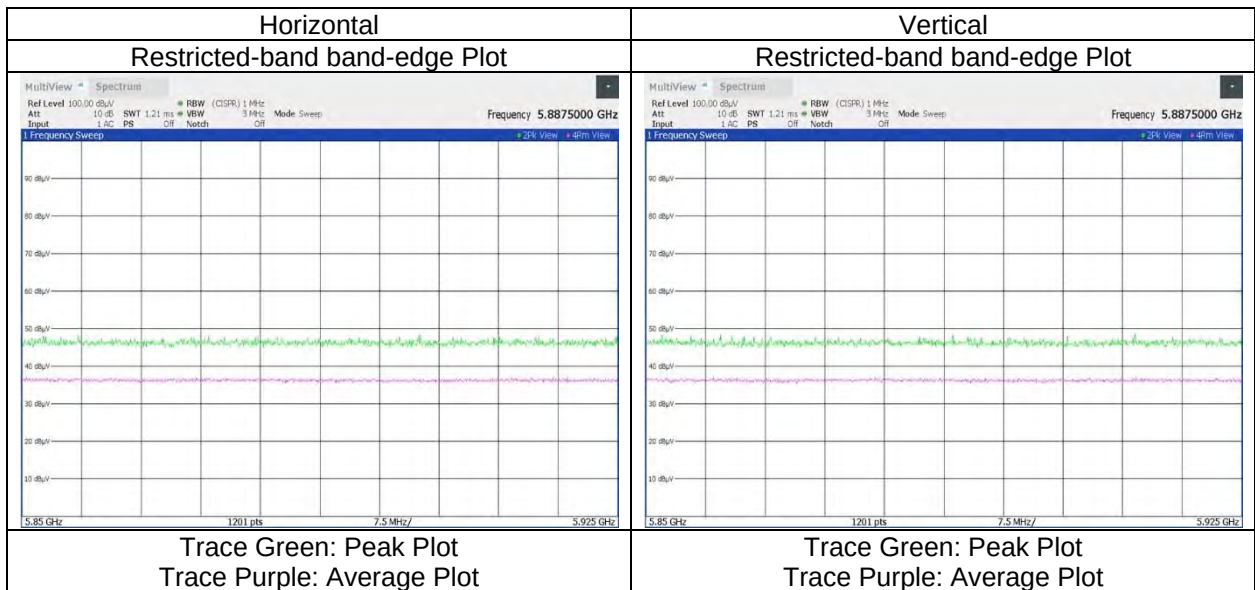

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 61, MIMO 5190 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.64	32.61	-27.03	-	2.22	56.44	73.9	17.4	394	3	-
Hori.	5150.000	AV	37.68	32.61	-27.03	-	2.22	45.48	53.9	8.4	394	3	-
Vert.	5150.000	PK	48.18	32.61	-27.03	-	2.22	55.98	73.9	17.9	383	341	-
Vert.	5150.000	AV	37.63	32.61	-27.03	-	2.22	45.43	53.9	8.4	383	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

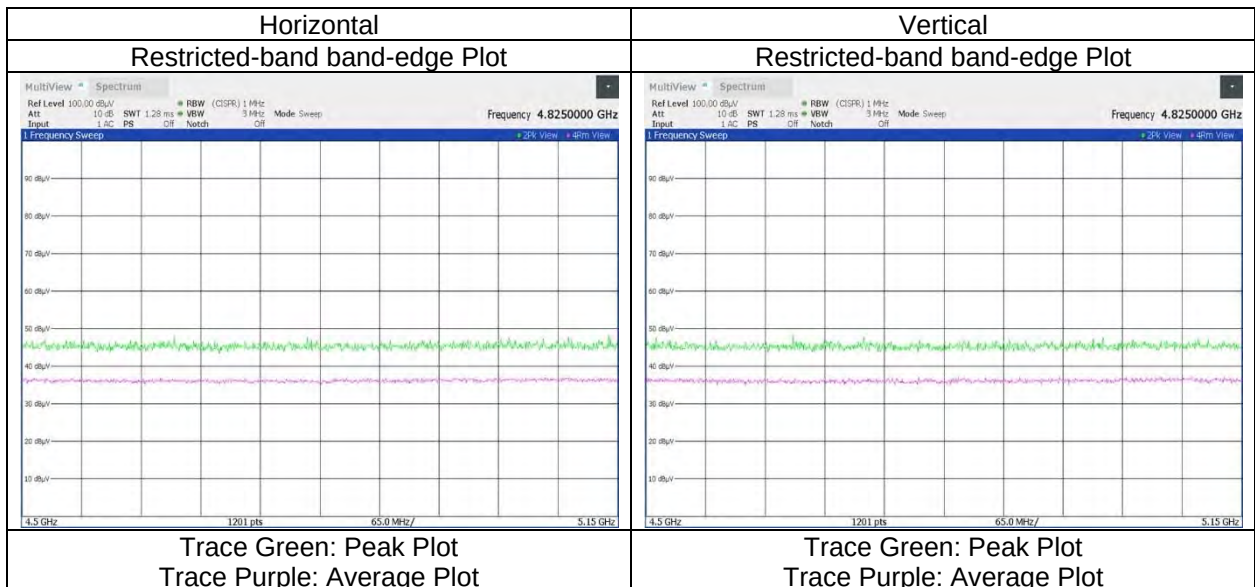

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 62, MIMO 5310 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 10, 2026	WAC2	24 deg. C	26 % RH	Takayuki Kobayashi	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.29	32.52	-26.78	-	2.22	56.25	73.9	17.6	360	348	-
Hori.	5350.000	AV	37.71	32.52	-26.78	-	2.22	45.67	53.9	8.2	360	348	-
Vert.	5350.000	PK	49.16	32.52	-26.78	-	2.22	57.12	73.9	16.7	336	346	-
Vert.	5350.000	AV	37.71	32.52	-26.78	-	2.22	45.67	53.9	8.2	336	346	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

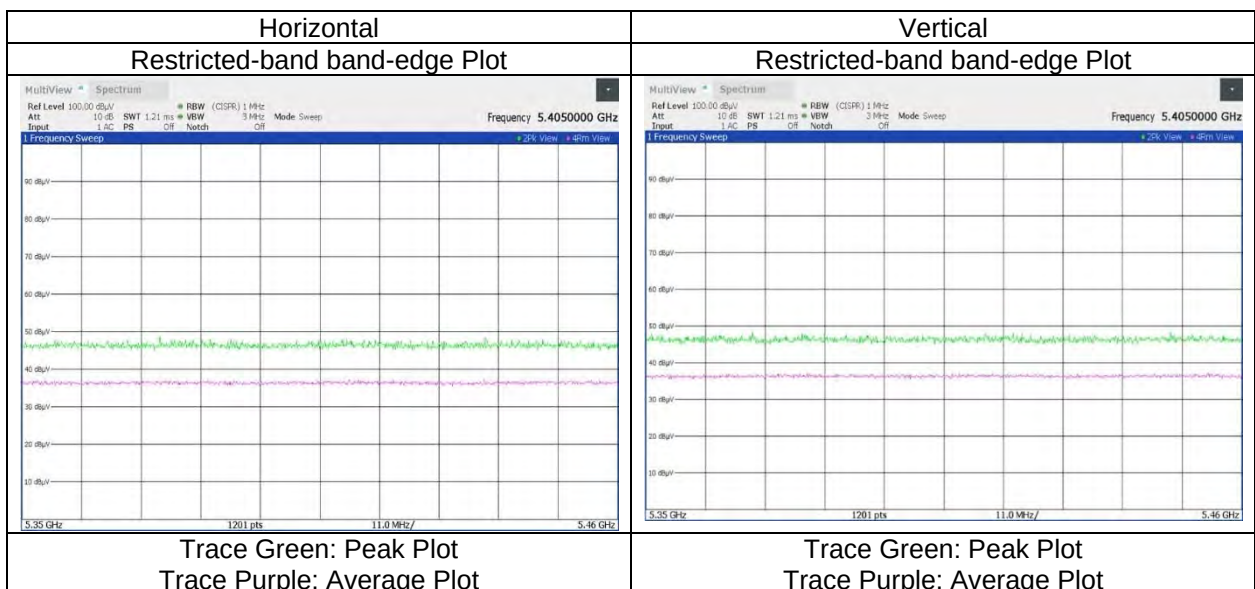

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 61, MIMO 5510 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.36	32.98	-26.65	-	2.22	45.91	53.9	7.9	396	352	-
Vert.	5460.000	AV	37.41	32.98	-26.65	-	2.22	45.96	53.9	7.9	290	7	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.60	32.98	-26.65	-	-	2.22	57.15	-38.08	-27.0	11.0	396	352	-
Hori.	5470.000	PK	48.86	33.04	-26.64	-	-	2.22	57.48	-37.75	-27.0	10.7	396	352	-
Vert.	5460.000	PK	48.44	32.98	-26.65	-	-	2.22	56.99	-38.24	-27.0	11.2	290	7	-
Vert.	5470.000	PK	48.49	33.04	-26.64	-	-	2.22	57.11	-38.12	-27.0	11.1	290	7	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

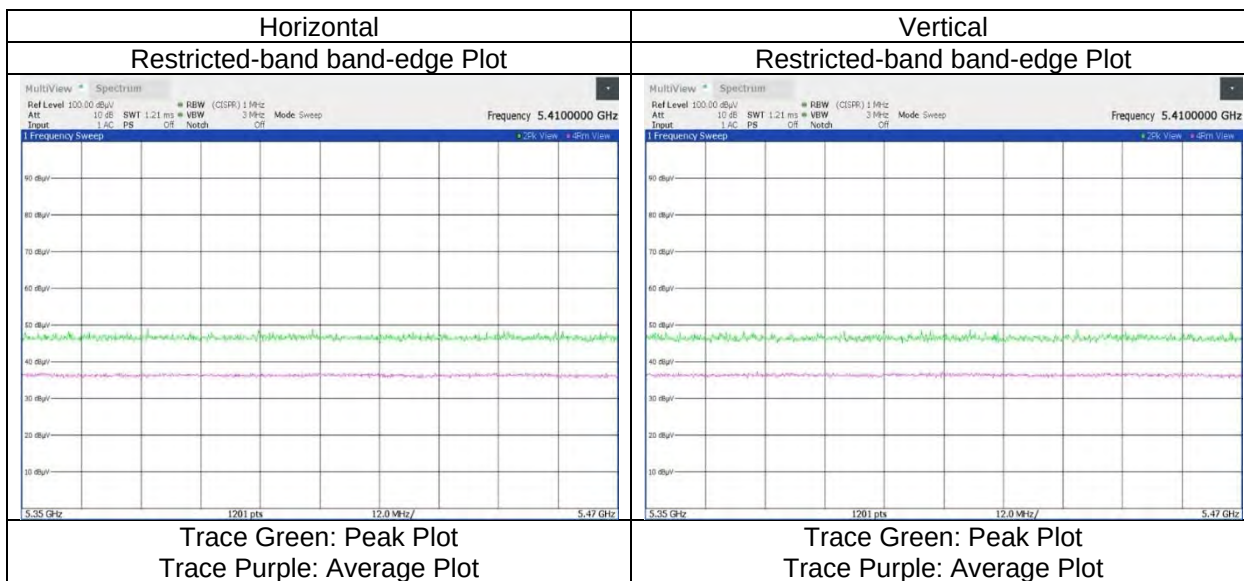

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 62, MIMO 5670 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.94	33.67	-26.57	-	-	2.22	58.26	-36.97	-27.0	9.9	400	352	-
Vert.	5725.000	PK	48.72	33.67	-26.57	-	-	2.22	58.04	-37.19	-27.0	10.1	326	3	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

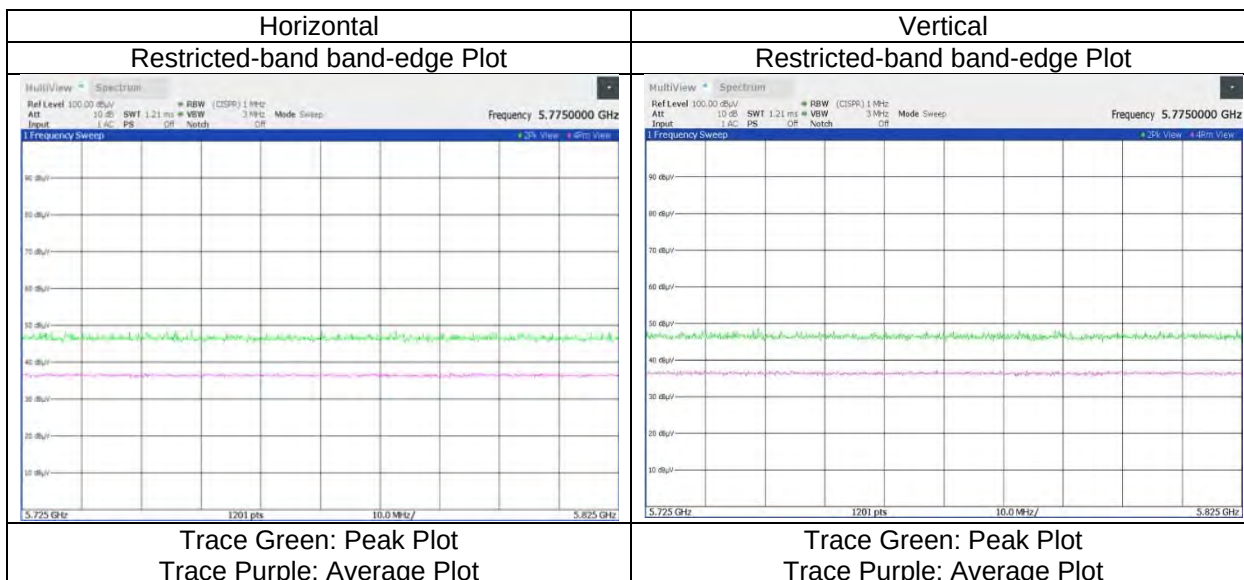

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 61, MIMO 5755 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.22	33.66	-26.58	-	-	2.22	57.52	-37.71	-27.0	10.7	389	358	-
Hori.	5700.000	PK	48.43	33.69	-26.58	-	-	2.22	57.76	-37.47	10.0	47.4	389	358	-
Hori.	5720.000	PK	48.65	33.66	-26.58	-	-	2.22	57.95	-37.28	15.6	52.8	389	358	-
Hori.	5725.000	PK	48.95	33.67	-26.57	-	-	2.22	58.27	-36.96	27.0	63.9	389	358	-
Vert.	5650.000	PK	48.40	33.66	-26.58	-	-	2.22	57.70	-37.53	-27.0	10.5	295	6	-
Vert.	5700.000	PK	48.57	33.69	-26.58	-	-	2.22	57.90	-37.33	10.0	47.3	295	6	-
Vert.	5720.000	PK	49.01	33.66	-26.58	-	-	2.22	58.31	-36.92	15.6	52.5	295	6	-
Vert.	5725.000	PK	49.26	33.67	-26.57	-	-	2.22	58.58	-36.65	27.0	63.6	295	6	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

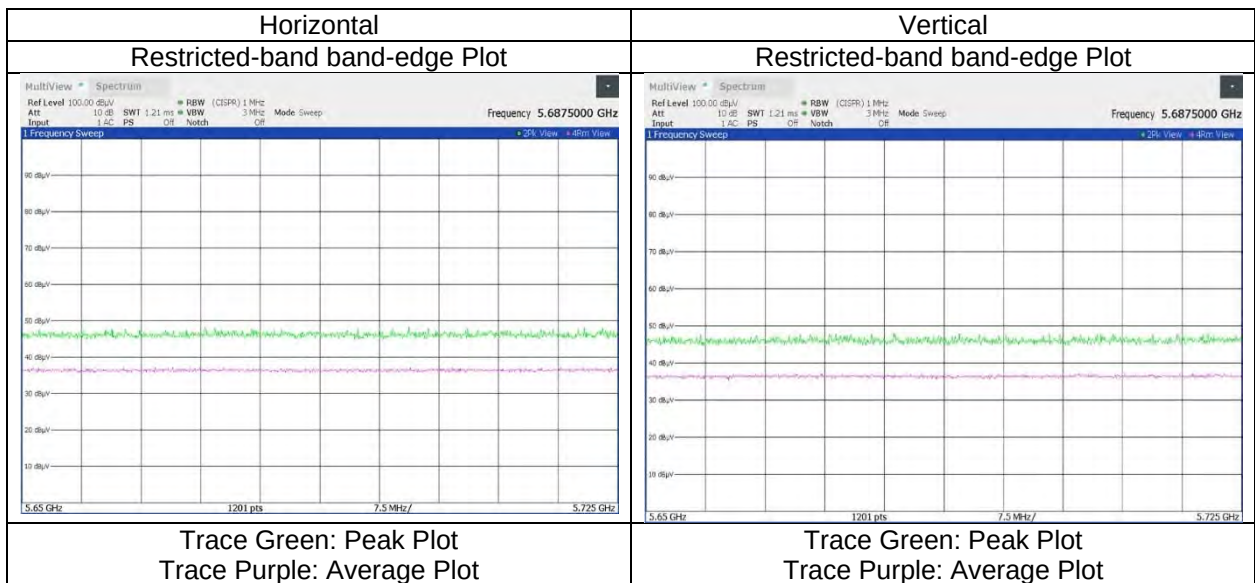

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 242-tone RU, RU Index 62, MIMO 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	49.20	33.70	-26.56	-	-	2.22	58.56	-36.67	27.0	63.6	383	355	-	-
Hori.	5855.000	PK	48.73	33.71	-26.56	-	-	2.22	58.10	-37.13	15.6	52.7	383	355	-	-
Hori.	5875.000	PK	48.57	33.73	-26.54	-	-	2.22	57.98	-37.25	10.0	47.2	383	355	-	-
Hori.	5925.000	PK	48.19	33.85	-26.53	-	-	2.22	57.73	-37.50	-27.0	10.5	383	355	-	-
Vert.	5850.000	PK	49.34	33.70	-26.56	-	-	2.22	58.70	-36.53	27.0	63.5	323	5	-	-
Vert.	5855.000	PK	48.82	33.71	-26.56	-	-	2.22	58.19	-37.04	15.6	52.6	323	5	-	-
Vert.	5875.000	PK	48.44	33.73	-26.54	-	-	2.22	57.85	-37.38	10.0	47.3	323	5	-	-
Vert.	5925.000	PK	48.37	33.85	-26.53	-	-	2.22	57.91	-37.32	-27.0	10.3	323	5	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

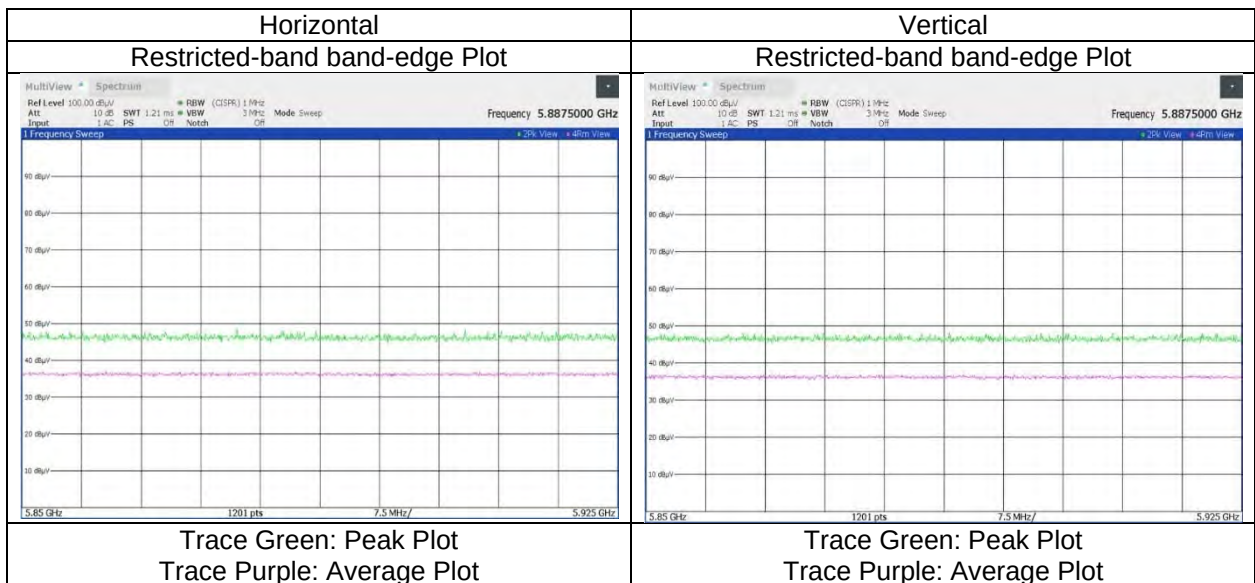

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5190 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.89	32.61	-27.03	-	2.22	56.69	73.9	17.2	390	350	-
Hori.	5150.000	AV	37.41	32.61	-27.03	-	2.22	45.21	53.9	8.6	390	350	-
Vert.	5150.000	PK	48.61	32.61	-27.03	-	2.22	56.41	73.9	17.4	255	349	-
Vert.	5150.000	AV	37.30	32.61	-27.03	-	2.22	45.10	53.9	8.8	255	349	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

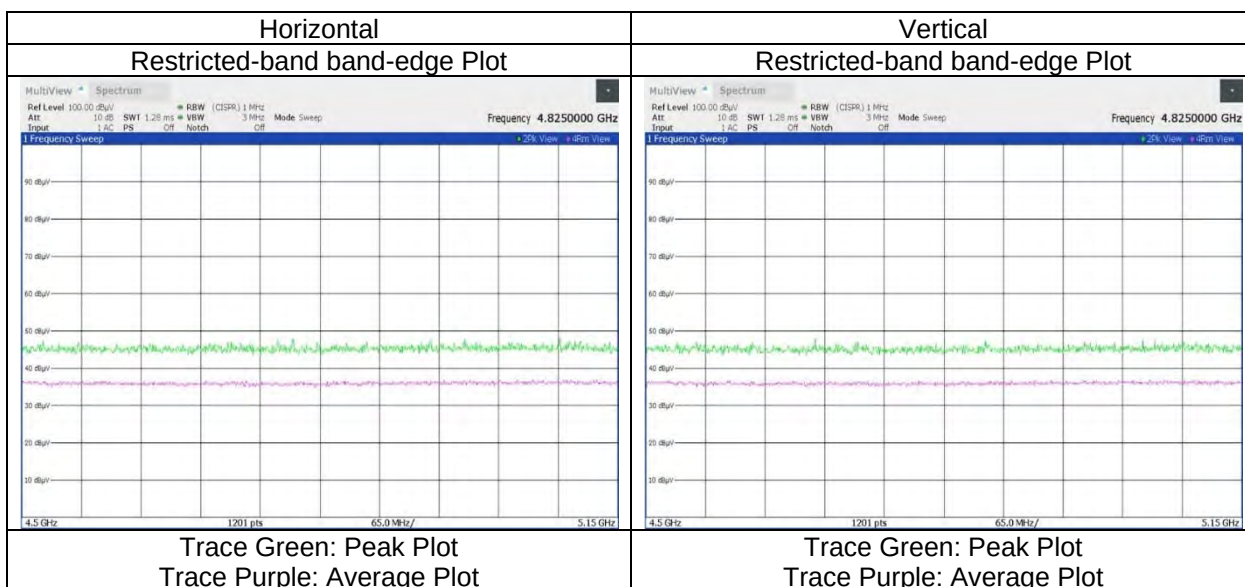

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5310 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.79	32.52	-26.78	-	2.22	56.75	73.9	17.1	394	7	-
Hori.	5350.000	AV	37.56	32.52	-26.78	-	2.22	45.52	53.9	8.3	394	7	-
Vert.	5350.000	PK	48.70	32.52	-26.78	-	2.22	56.66	73.9	17.2	231	346	-
Vert.	5350.000	AV	37.26	32.52	-26.78	-	2.22	45.22	53.9	8.6	231	346	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

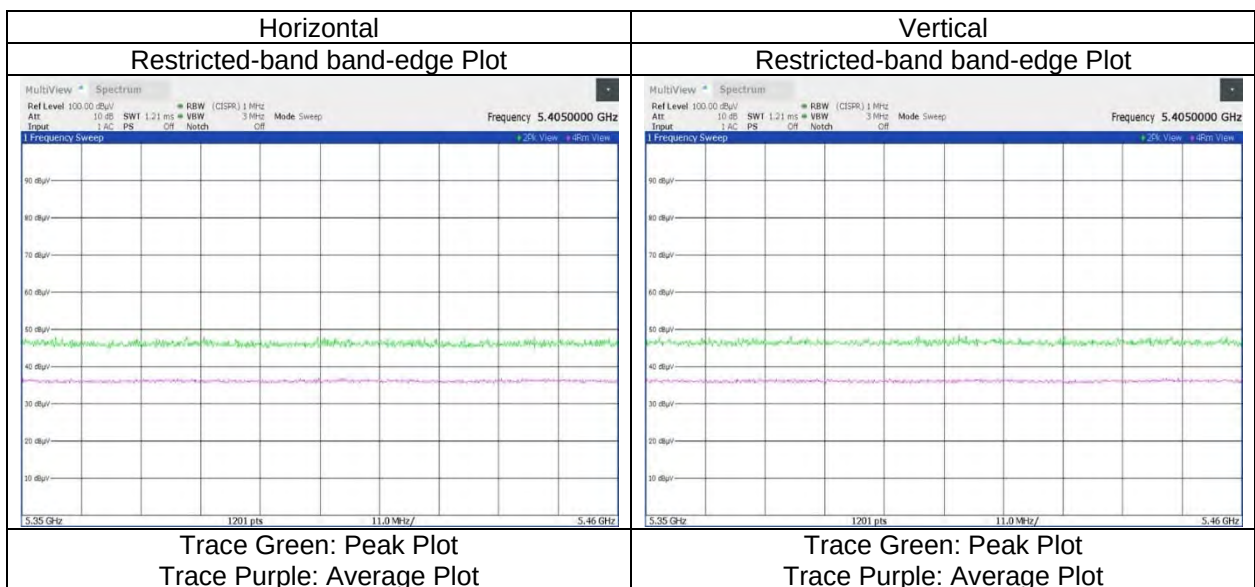

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5510 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.26	32.98	-26.65	-	2.22	45.81	53.9	8.0	396	356	-
Vert.	5460.000	AV	37.27	32.98	-26.65	-	2.22	45.82	53.9	8.0	287	8	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.32	32.98	-26.65	-	-	2.22	56.87	-38.36	-27.0	11.3	396	356	-
Hori.	5470.000	PK	48.51	33.04	-26.64	-	-	2.22	57.13	-38.10	-27.0	11.1	396	356	-
Vert.	5460.000	PK	48.39	32.98	-26.65	-	-	2.22	56.94	-38.29	-27.0	11.2	287	8	-
Vert.	5470.000	PK	48.78	33.04	-26.64	-	-	2.22	57.40	-37.83	-27.0	10.8	287	8	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result\text{ [dBuV/m]} / 20)} * 10^{(-6)} * \text{Distance} : 3\text{ [m]})^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

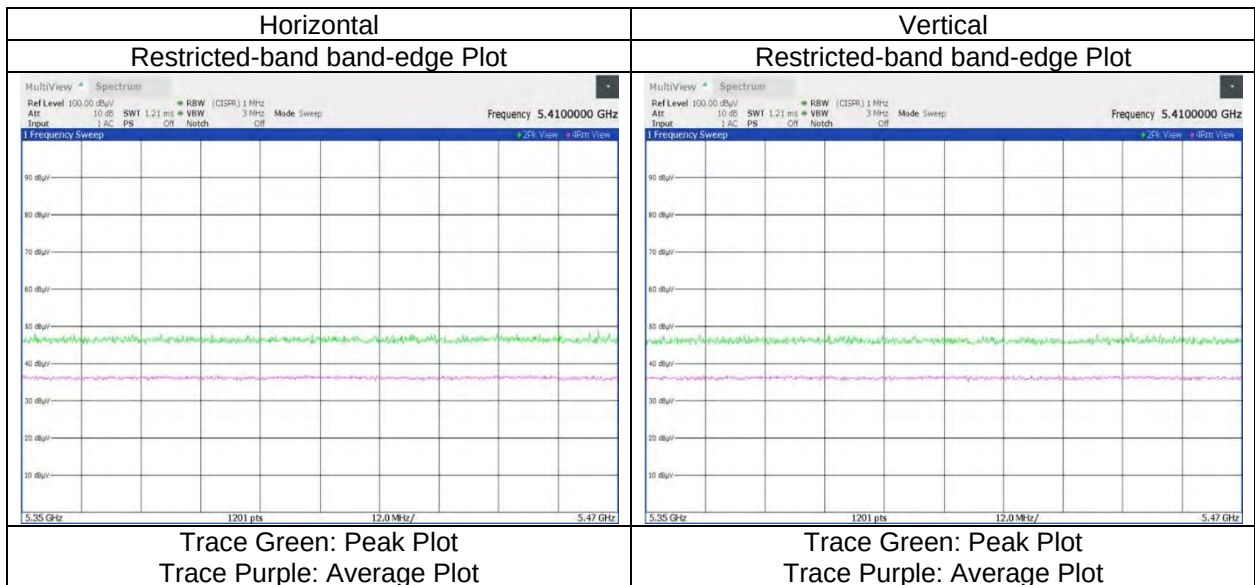

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5670 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.44	33.67	-26.57	-	-	2.22	57.76	-37.47	-27.0	10.4	381	354	-
Vert.	5725.000	PK	48.86	33.67	-26.57	-	-	2.22	58.18	-37.05	-27.0	10.0	372	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

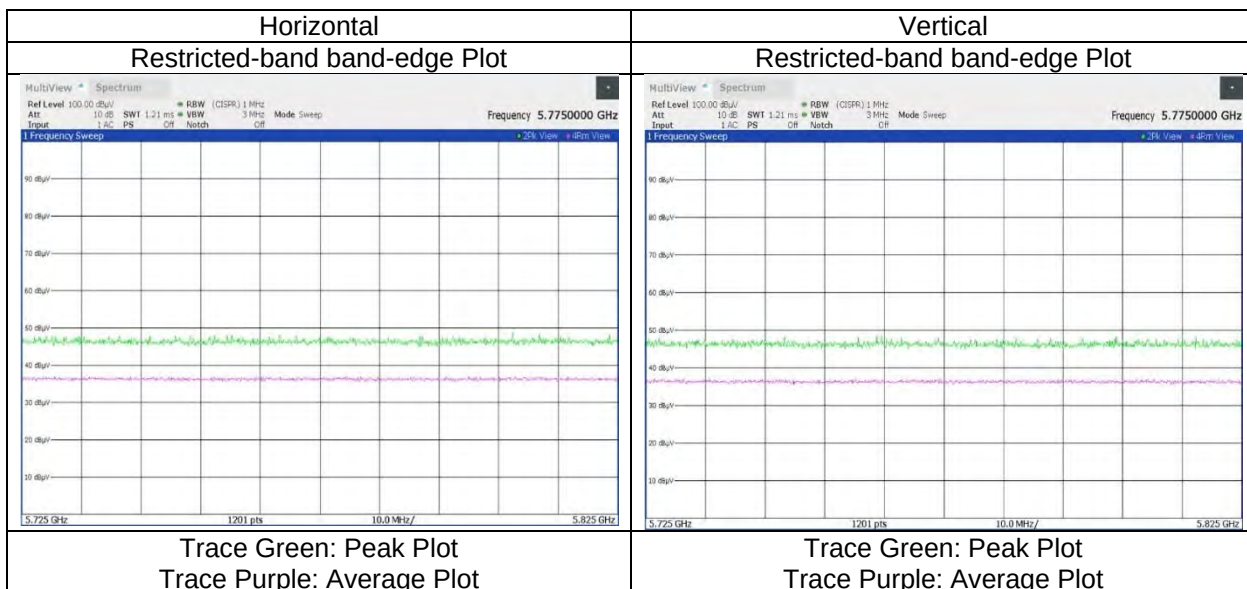

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5755 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.66	33.66	-26.58	-	-	2.22	57.96	-37.27	-27.0	10.2	369	2	-
Hori.	5700.000	PK	48.86	33.69	-26.58	-	-	2.22	58.19	-37.04	10.0	47.0	369	2	-
Hori.	5720.000	PK	49.02	33.66	-26.58	-	-	2.22	58.32	-36.91	15.6	52.5	369	2	-
Hori.	5725.000	PK	49.27	33.67	-26.57	-	-	2.22	58.59	-36.64	27.0	63.6	369	2	-
Vert.	5650.000	PK	48.34	33.66	-26.58	-	-	2.22	57.64	-37.59	-27.0	10.5	328	5	-
Vert.	5700.000	PK	48.64	33.69	-26.58	-	-	2.22	57.97	-37.26	10.0	47.2	328	5	-
Vert.	5720.000	PK	49.08	33.66	-26.58	-	-	2.22	58.38	-36.85	15.6	52.4	328	5	-
Vert.	5725.000	PK	49.17	33.67	-26.57	-	-	2.22	58.49	-36.74	27.0	63.7	328	5	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA), 484-tone RU, RU Index 65, MIMO 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	49.29	33.70	-26.56	-	-	2.22	58.65	-36.58	27.0	63.5	367	0	-	-
Hori.	5855.000	PK	48.96	33.71	-26.56	-	-	2.22	58.33	-36.90	15.6	52.5	367	0	-	-
Hori.	5875.000	PK	48.48	33.73	-26.54	-	-	2.22	57.89	-37.34	10.0	47.3	367	0	-	-
Hori.	5925.000	PK	48.21	33.85	-26.53	-	-	2.22	57.75	-37.48	-27.0	10.4	367	0	-	-
Vert.	5850.000	PK	49.37	33.70	-26.56	-	-	2.22	58.73	-36.50	27.0	63.5	290	3	-	-
Vert.	5855.000	PK	48.93	33.71	-26.56	-	-	2.22	58.30	-36.93	15.6	52.5	290	3	-	-
Vert.	5875.000	PK	48.73	33.73	-26.54	-	-	2.22	58.14	-37.09	10.0	47.0	290	3	-	-
Vert.	5925.000	PK	48.43	33.85	-26.53	-	-	2.22	57.97	-37.26	-27.0	10.2	290	3	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

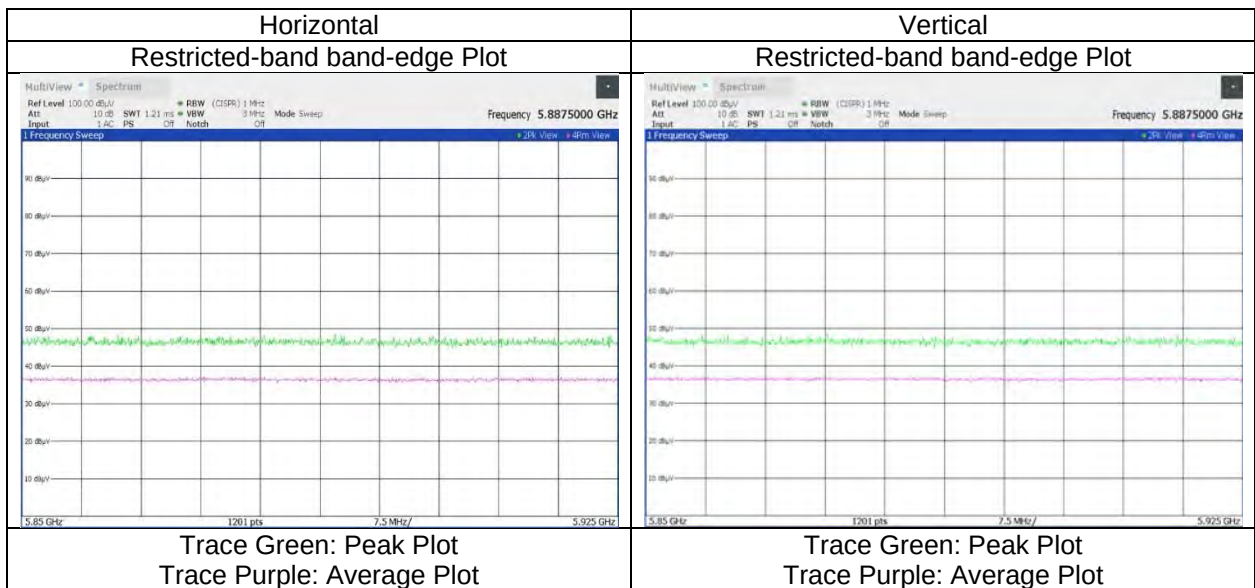

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5210 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.81	32.61	-27.03	-	2.22	56.61	73.9	17.2	396	3	-
Hori.	15630.000	PK	46.26	39.66	-27.47	-	-9.54	48.91	73.9	24.9	150	0	Floor Noise
Hori.	20840.000	PK	51.39	33.14	12.81	51.25	-9.54	36.55	73.9	37.3	127	247	-
Hori.	5150.000	AV	37.39	32.61	-27.03	-	2.22	45.19	53.9	8.7	396	3	-
Hori.	15630.000	AV	35.92	39.66	-27.47	-	-9.54	38.57	53.9	15.3	150	0	Floor Noise
Hori.	20840.000	AV	47.18	33.14	12.81	51.25	-9.54	32.34	53.9	21.5	127	247	-
Vert.	5150.000	PK	48.64	32.61	-27.03	-	2.22	56.44	73.9	17.4	271	344	-
Vert.	15630.000	PK	46.84	39.66	-27.47	-	-9.54	49.49	73.9	24.4	150	0	Floor Noise
Vert.	20840.000	PK	51.64	33.14	12.81	51.25	-9.54	36.80	73.9	37.1	167	345	-
Vert.	5150.000	AV	37.15	32.61	-27.03	-	2.22	44.95	53.9	8.9	271	344	-
Vert.	15630.000	AV	35.90	39.66	-27.47	-	-9.54	38.55	53.9	15.3	150	0	Floor Noise
Vert.	20840.000	AV	46.84	33.14	12.81	51.25	-9.54	32.00	53.9	21.9	167	345	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	6946.672	PK	50.27	35.97	-34.74	-	-	2.22	53.72	-41.51	-27.0	14.5	346	339	-
Hori.	10420.000	PK	46.33	36.51	-30.20	-	-	-9.54	43.10	-52.13	-27.0	25.1	150	0	Floor Noise
Vert.	6946.672	PK	51.04	35.97	-34.74	-	-	2.22	54.49	-40.74	-27.0	13.7	400	359	-
Vert.	10420.000	PK	46.02	36.51	-30.20	-	-	-9.54	42.79	-52.44	-27.0	25.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG} ((10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : 3 [m]}) \wedge 2 / 30 * 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

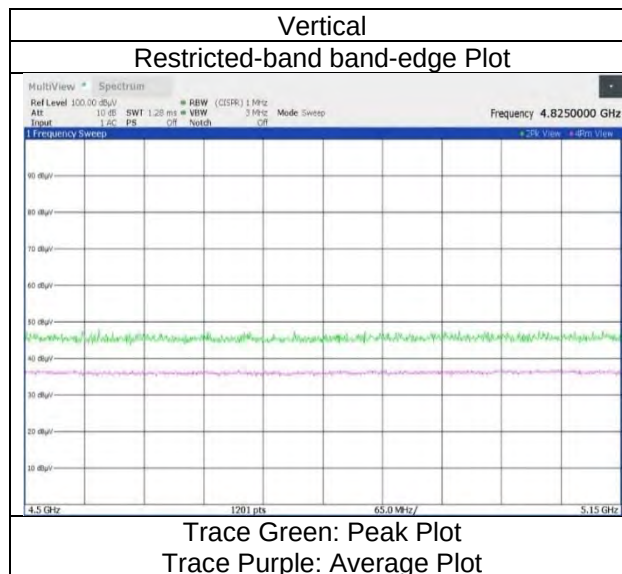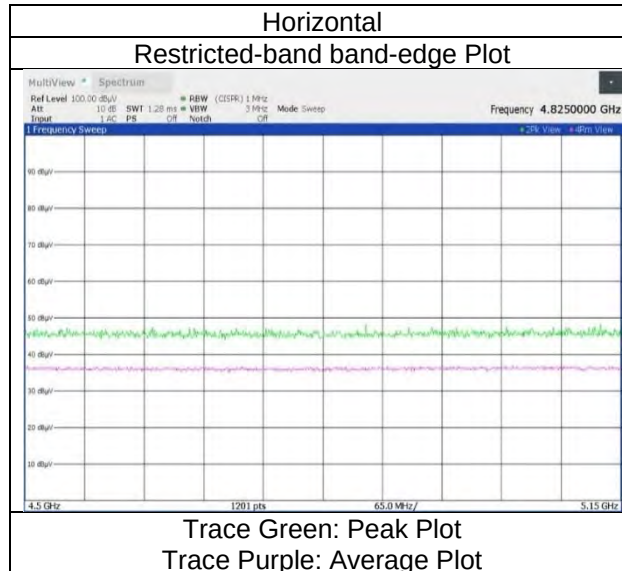

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5290 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.99	32.52	-26.78	-	2.22	56.95	73.9	16.9	373	7	-
Hori.	15870.000	PK	45.92	39.91	-27.74	-	-9.54	48.55	73.9	25.3	150	0	Floor Noise
Hori.	21160.000	PK	52.51	33.29	12.92	51.09	-9.54	38.09	73.9	35.8	159	217	-
Hori.	5350.000	AV	37.28	32.52	-26.78	-	2.22	45.24	53.9	8.6	373	7	-
Hori.	15870.000	AV	35.34	39.91	-27.74	-	-9.54	37.97	53.9	15.9	150	0	Floor Noise
Hori.	21160.000	AV	48.61	33.29	12.92	51.09	-9.54	34.19	53.9	19.7	159	217	-
Vert.	5350.000	PK	48.89	32.52	-26.78	-	2.22	56.85	73.9	17.0	215	345	-
Vert.	15870.000	PK	46.61	39.91	-27.74	-	-9.54	49.24	73.9	24.6	150	0	Floor Noise
Vert.	21160.000	PK	51.36	33.29	12.92	51.09	-9.54	36.94	73.9	36.9	151	347	-
Vert.	5350.000	AV	37.17	32.52	-26.78	-	2.22	45.13	53.9	8.7	215	345	-
Vert.	15870.000	AV	35.43	39.91	-27.74	-	-9.54	38.06	53.9	15.8	150	0	Floor Noise
Vert.	21160.000	AV	45.83	33.29	12.92	51.09	-9.54	31.41	53.9	22.4	151	347	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7053.339	PK	50.10	35.87	-34.66	-	-	2.22	53.53	-41.70	-27.0	14.7	382	338	-
Hori.	10580.000	PK	45.89	36.98	-29.99	-	-	-9.54	43.34	-51.89	-27.0	24.8	150	0	Floor Noise
Vert.	7053.339	PK	50.14	35.87	-34.66	-	-	2.22	53.57	-41.66	-27.0	14.6	400	359	-
Vert.	10580.000	PK	46.15	36.98	-29.99	-	-	-9.54	43.60	-51.63	-27.0	24.6	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \times \text{LOG}((10 \wedge (\text{Result [dBuV/m]} / 20) \times 10 \wedge (-6) \times \text{Distance : 3 [m]} \wedge 2 / 30 \times 10 \wedge 3))$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5290 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

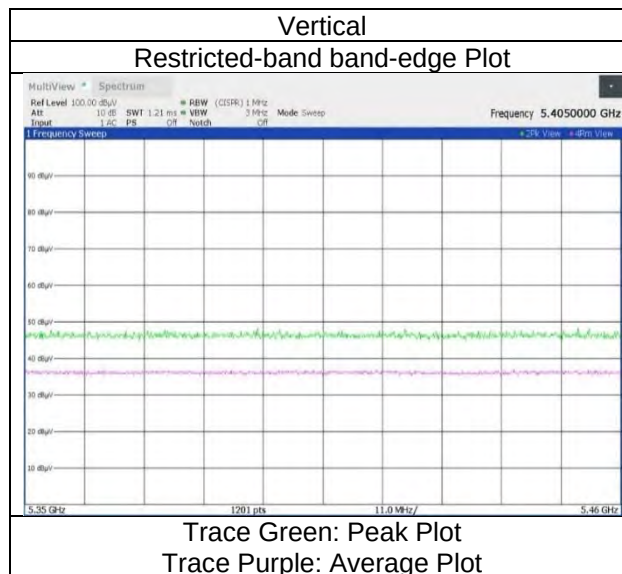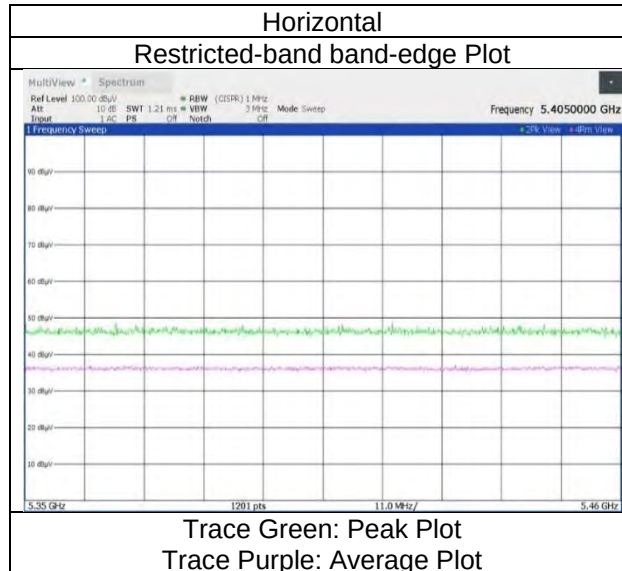

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5530 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11060.000	PK	46.82	37.35	-29.73	-	-9.54	44.90	73.9	29.0	150	0	Floor Noise
Hori.	22120.000	PK	52.30	33.45	13.21	51.01	-9.54	38.41	73.9	35.4	171	263	-
Hori.	5460.000	AV	37.23	32.98	-26.65	-	2.22	45.78	53.9	8.1	400	351	-
Hori.	11060.000	AV	35.29	37.35	-29.73	-	-9.54	33.37	53.9	20.5	150	0	Floor Noise
Hori.	22120.000	AV	49.19	33.45	13.21	51.01	-9.54	35.30	53.9	18.6	171	263	-
Vert.	11060.000	PK	46.49	37.35	-29.73	-	-9.54	44.57	73.9	29.3	150	0	Floor Noise
Vert.	22120.000	PK	50.22	33.45	13.21	51.01	-9.54	36.33	73.9	37.5	151	46	-
Vert.	5460.000	AV	37.35	32.98	-26.65	-	2.22	45.90	53.9	8.0	309	5	-
Vert.	11060.000	AV	35.27	37.35	-29.73	-	-9.54	33.35	53.9	20.5	150	0	Floor Noise
Vert.	22120.000	AV	45.07	33.45	13.21	51.01	-9.54	31.18	53.9	22.7	151	46	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.12	32.98	-26.65	-	-	2.22	56.67	-38.56	-27.0	11.5	400	351	-
Hori.	5470.000	PK	48.27	33.04	-26.64	-	-	2.22	56.89	-38.34	-27.0	11.3	400	351	-
Hori.	16590.000	PK	46.67	39.66	-26.61	-	-	-9.54	50.18	-45.05	-27.0	18.0	150	0	Floor Noise
Vert.	5460.000	PK	48.44	32.98	-26.65	-	-	2.22	56.99	-38.24	-27.0	11.2	309	5	-
Vert.	5470.000	PK	48.47	33.04	-26.64	-	-	2.22	57.09	-38.14	-27.0	11.1	309	5	-
Vert.	16590.000	PK	46.80	39.66	-26.61	-	-	-9.54	50.31	-44.92	-27.0	17.9	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : } 3[m]) \wedge 2 / 30 * 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5530 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

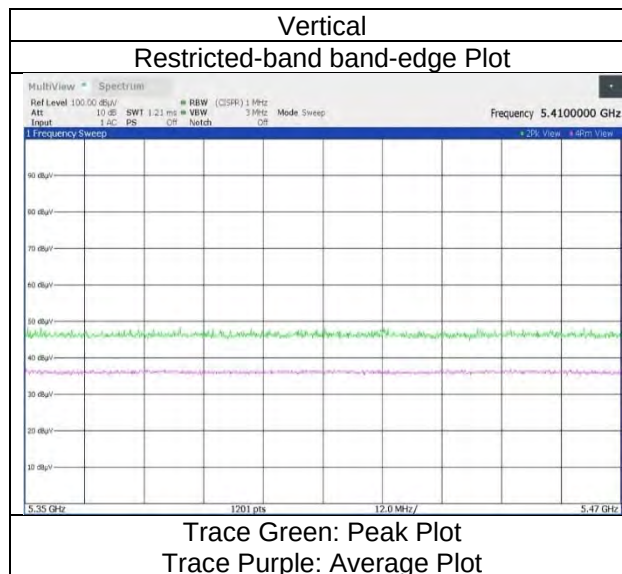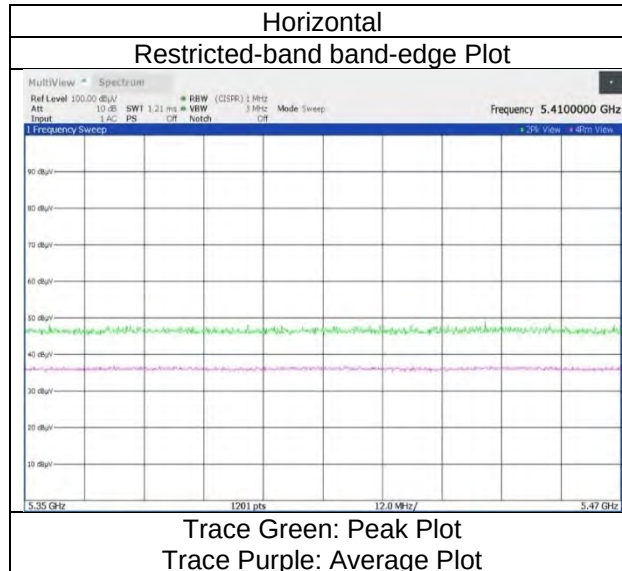

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5610 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11220.000	PK	51.64	37.52	-29.62	-	-9.54	50.00	73.9	23.9	150	232	Floor Noise
Hori.	22440.000	PK	50.64	33.54	13.35	50.88	-9.54	37.11	73.9	36.7	148	78	-
Hori.	11220.000	AV	34.98	37.52	-29.62	-	-9.54	33.34	53.9	20.5	150	232	Floor Noise
Hori.	22440.000	AV	45.59	33.54	13.35	50.88	-9.54	32.06	53.9	21.8	148	78	-
Vert.	11220.000	PK	52.61	37.52	-29.62	-	-9.54	50.97	73.9	22.9	150	146	Floor Noise
Vert.	22440.000	PK	50.23	33.54	13.35	50.88	-9.54	36.70	73.9	37.2	142	181	-
Vert.	11220.000	AV	35.88	37.52	-29.62	-	-9.54	34.24	53.9	19.6	150	146	Floor Noise
Vert.	22440.000	AV	45.39	33.54	13.35	50.88	-9.54	31.86	53.9	22.0	142	181	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.18	33.67	-26.57	-	-	2.22	57.50	-37.73	-27.0	10.7	377	353	-
Hori.	16830.000	PK	45.97	39.34	-26.35	-	-	-9.54	49.42	-45.81	-27.0	18.8	150	0	Floor Noise
Vert.	5725.000	PK	48.36	33.67	-26.57	-	-	2.22	57.68	-37.55	-27.0	10.5	356	4	-
Vert.	16830.000	PK	46.21	39.34	-26.35	-	-	-9.54	49.66	-45.57	-27.0	18.5	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG} ((10^{(\text{Result [dBuV/m]} / 20)} * 10^{(-6)} * \text{Distance : 3 [m]})^2 / 30 * 10^{(-3)})$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

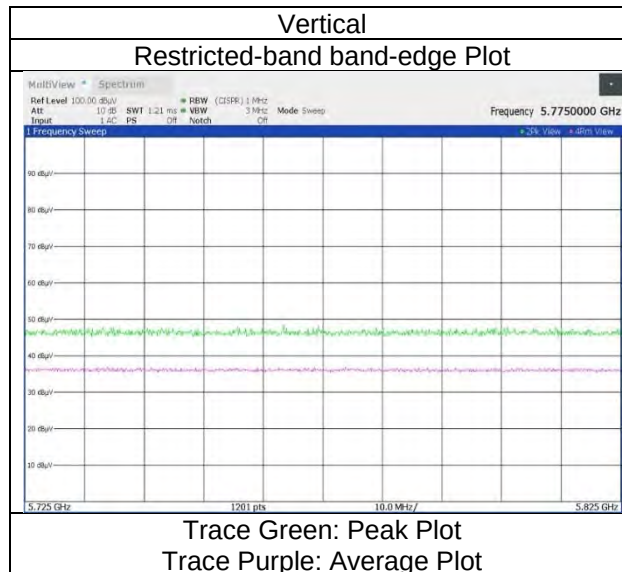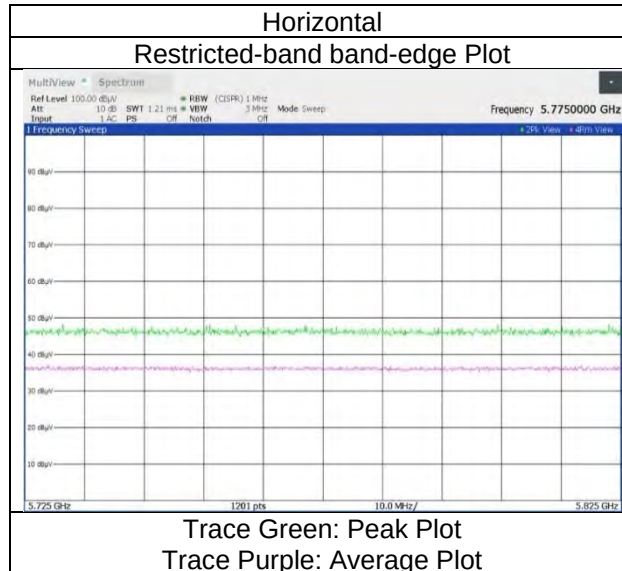

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5775 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11550.000	PK	46.53	38.04	-29.45	-	-9.54	45.58	73.9	28.3	150	0	Floor Noise
Hori.	23100.000	PK	52.24	33.71	13.55	50.63	-9.54	39.33	73.9	34.5	165	214	-
Hori.	11550.000	AV	35.22	38.04	-29.45	-	-9.54	34.27	53.9	19.6	150	0	Floor Noise
Hori.	23100.000	AV	48.83	33.71	13.55	50.63	-9.54	35.92	53.9	17.9	165	214	-
Vert.	11550.000	PK	45.79	38.04	-29.45	-	-9.54	44.84	73.9	29.0	150	0	Floor Noise
Vert.	23100.000	PK	51.19	33.71	13.55	50.63	-9.54	38.28	73.9	35.6	158	341	-
Vert.	11550.000	AV	34.94	38.04	-29.45	-	-9.54	33.99	53.9	19.9	150	0	Floor Noise
Vert.	23100.000	AV	46.84	33.71	13.55	50.63	-9.54	33.93	53.9	19.9	158	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.24	33.66	-26.58	-	-	2.22	57.54	-37.69	-27.0	10.6	376	356	-
Hori.	5700.000	PK	48.52	33.69	-26.58	-	-	2.22	57.85	-37.38	10.0	47.3	376	356	-
Hori.	5720.000	PK	49.13	33.66	-26.58	-	-	2.22	58.43	-36.80	15.6	52.4	376	356	-
Hori.	5725.000	PK	53.24	33.67	-26.57	-	-	2.22	62.56	-32.67	27.0	59.6	376	356	-
Hori.	5850.000	PK	49.16	33.70	-26.56	-	-	2.22	58.52	-36.71	27.0	63.7	376	356	-
Hori.	5855.000	PK	48.61	33.71	-26.56	-	-	2.22	57.98	-37.25	15.6	52.8	376	356	-
Hori.	5875.000	PK	48.47	33.73	-26.54	-	-	2.22	57.88	-37.35	10.0	47.3	376	356	-
Hori.	5925.000	PK	48.44	33.85	-26.53	-	-	2.22	57.98	-37.25	-27.0	10.2	376	356	-
Hori.	17325.000	PK	46.77	40.27	-25.85	-	-	-9.54	51.65	-43.58	-27.0	16.5	150	0	Floor Noise
Vert.	5650.000	PK	48.29	33.66	-26.58	-	-	2.22	57.59	-37.64	-27.0	10.6	338	4	-
Vert.	5700.000	PK	48.60	33.69	-26.58	-	-	2.22	57.93	-37.30	10.0	47.3	338	4	-
Vert.	5720.000	PK	51.32	33.66	-26.58	-	-	2.22	60.62	-34.61	15.6	50.2	338	4	-
Vert.	5725.000	PK	55.85	33.67	-26.57	-	-	2.22	65.17	-30.06	27.0	57.0	338	4	-
Vert.	5850.000	PK	48.72	33.70	-26.56	-	-	2.22	58.08	-37.15	27.0	64.1	338	4	-
Vert.	5855.000	PK	48.40	33.71	-26.56	-	-	2.22	57.77	-37.46	15.6	53.0	338	4	-
Vert.	5875.000	PK	48.26	33.73	-26.54	-	-	2.22	57.67	-37.56	10.0	47.5	338	4	-
Vert.	5925.000	PK	48.15	33.85	-26.53	-	-	2.22	57.69	-37.54	-27.0	10.5	338	4	-
Vert.	17325.000	PK	45.99	40.27	-25.85	-	-	-9.54	50.87	-44.36	-27.0	17.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{\wedge}(\text{Result [dBuV/m]} / 20)) * 10^{\wedge}(-6)) * \text{Distance} : 3[m]^2 / 30 * 10^{\wedge}3)$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).



Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54[dB]$

Radiated Spurious Emission

Mode	Tx 11ac-80, MIMO 5775 MHz				
------	---------------------------	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

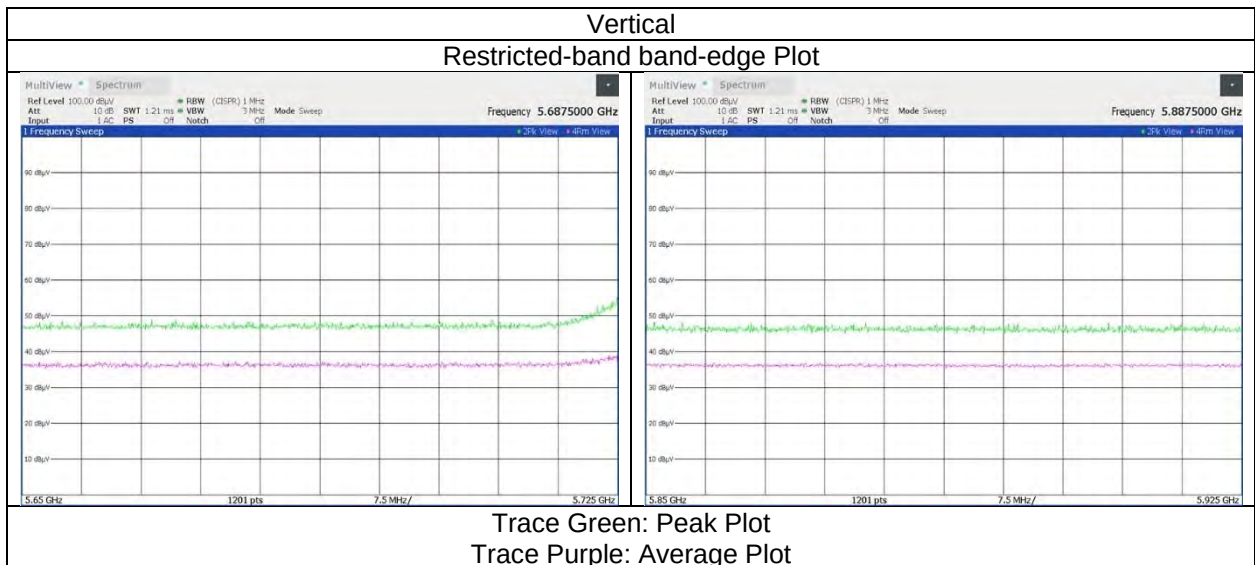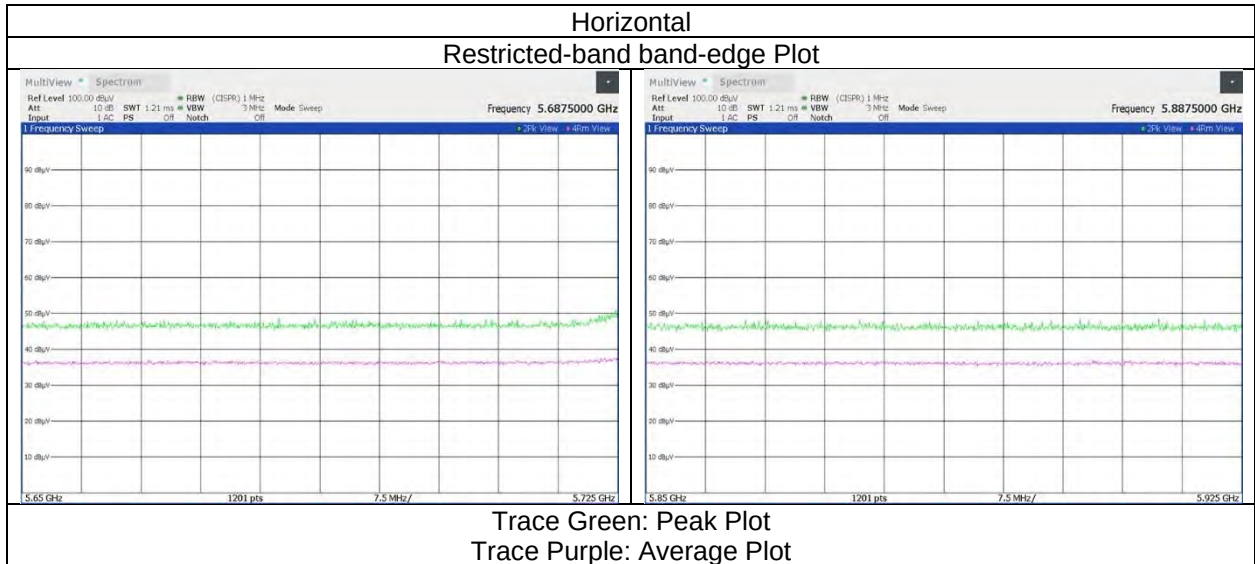

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5210 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.37	32.61	-27.03	-	2.22	56.17	73.9	17.7	375	3	-
Hori.	15630.000	PK	46.49	39.66	-27.47	-	-9.54	49.14	73.9	24.7	150	0	Floor Noise
Hori.	20840.000	PK	51.50	33.14	12.81	51.25	-9.54	36.66	73.9	37.2	130	248	-
Hori.	5150.000	AV	38.64	32.61	-27.03	-	2.22	46.44	53.9	7.4	375	3	-
Hori.	15630.000	AV	35.93	39.66	-27.47	-	-9.54	38.58	53.9	15.3	150	0	Floor Noise
Hori.	20840.000	AV	46.99	33.14	12.81	51.25	-9.54	32.15	53.9	21.7	130	248	-
Vert.	5150.000	PK	48.32	32.61	-27.03	-	2.22	56.12	73.9	17.7	240	347	-
Vert.	15630.000	PK	46.02	39.66	-27.47	-	-9.54	48.67	73.9	25.2	150	0	Floor Noise
Vert.	20840.000	PK	51.00	33.14	12.81	51.25	-9.54	36.16	73.9	37.7	169	344	-
Vert.	5150.000	AV	38.43	32.61	-27.03	-	2.22	46.23	53.9	7.6	240	347	-
Vert.	15630.000	AV	35.82	39.66	-27.47	-	-9.54	38.47	53.9	15.4	150	0	Floor Noise
Vert.	20840.000	AV	46.79	33.14	12.81	51.25	-9.54	31.95	53.9	21.9	169	344	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	6946.672	PK	49.86	35.97	-34.74	-	-	2.22	53.31	-41.92	-27.0	14.9	378	336	-
Hori.	10420.000	PK	46.82	36.51	-30.20	-	-	-9.54	43.59	-51.64	-27.0	24.6	150	0	Floor Noise
Vert.	6946.672	PK	51.37	35.97	-34.74	-	-	2.22	54.82	-40.41	-27.0	13.4	398	358	-
Vert.	10420.000	PK	46.36	36.51	-30.20	-	-	-9.54	43.13	-52.10	-27.0	25.1	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : } 3 [m]) \wedge 2 / 30 * 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

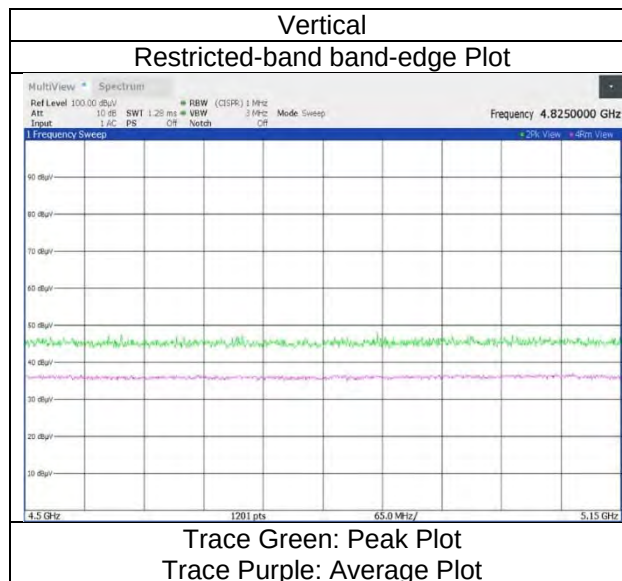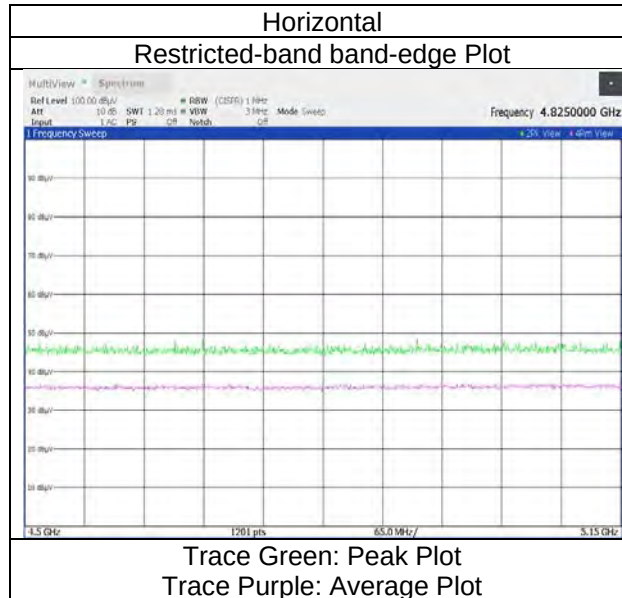

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5290 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.42	32.52	-26.78	-	2.22	56.38	73.9	17.5	364	2	-
Hori.	15870.000	PK	46.26	39.91	-27.74	-	-9.54	48.89	73.9	25.0	150	0	Floor Noise
Hori.	21160.000	PK	52.90	33.29	12.92	51.09	-9.54	38.48	73.9	35.4	154	217	-
Hori.	5350.000	AV	37.37	32.52	-26.78	-	2.22	45.33	53.9	8.5	364	2	-
Hori.	15870.000	AV	35.29	39.91	-27.74	-	-9.54	37.92	53.9	15.9	150	0	Floor Noise
Hori.	21160.000	AV	48.44	33.29	12.92	51.09	-9.54	34.02	53.9	19.8	154	217	-
Vert.	5350.000	PK	48.25	32.52	-26.78	-	2.22	56.21	73.9	17.6	221	347	-
Vert.	15870.000	PK	46.65	39.91	-27.74	-	-9.54	49.28	73.9	24.6	150	0	Floor Noise
Vert.	21160.000	PK	51.08	33.29	12.92	51.09	-9.54	36.66	73.9	37.2	146	347	-
Vert.	5350.000	AV	37.35	32.52	-26.78	-	2.22	45.31	53.9	8.5	221	347	-
Vert.	15870.000	AV	35.46	39.91	-27.74	-	-9.54	38.09	53.9	15.8	150	0	Floor Noise
Vert.	21160.000	AV	45.58	33.29	12.92	51.09	-9.54	31.16	53.9	22.7	146	347	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	7053.338	PK	49.21	35.87	-34.66	-	-	2.22	52.64	-42.59	-27.0	15.5	382	336	-
Hori.	10580.000	PK	45.79	36.98	-29.99	-	-	-9.54	43.24	-51.99	-27.0	24.9	150	0	Floor Noise
Vert.	7053.338	PK	49.78	35.87	-34.66	-	-	2.22	53.21	-42.02	-27.0	15.0	400	1	-
Vert.	10580.000	PK	46.60	36.98	-29.99	-	-	-9.54	44.05	-51.18	-27.0	24.1	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \text{LOG}((10 \wedge (\text{Result [dBuV/m]} / 20)) \cdot 10 \wedge (-6) \cdot \text{Distance : } 3\text{ [m]}) \wedge 2 / 30 \cdot 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5290 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

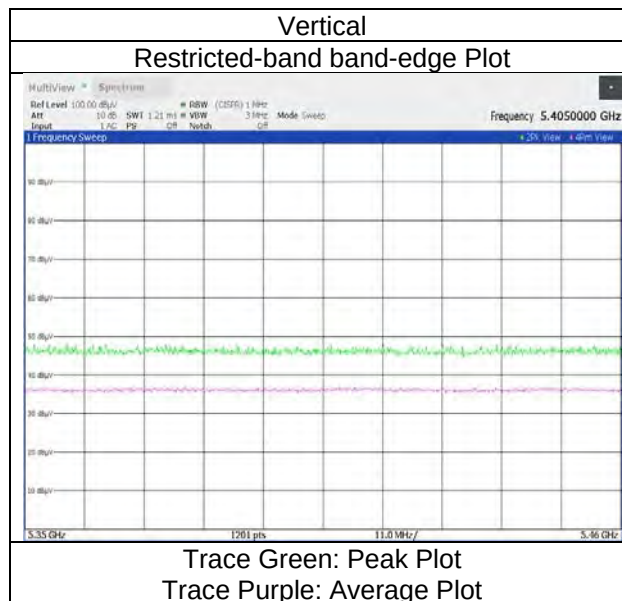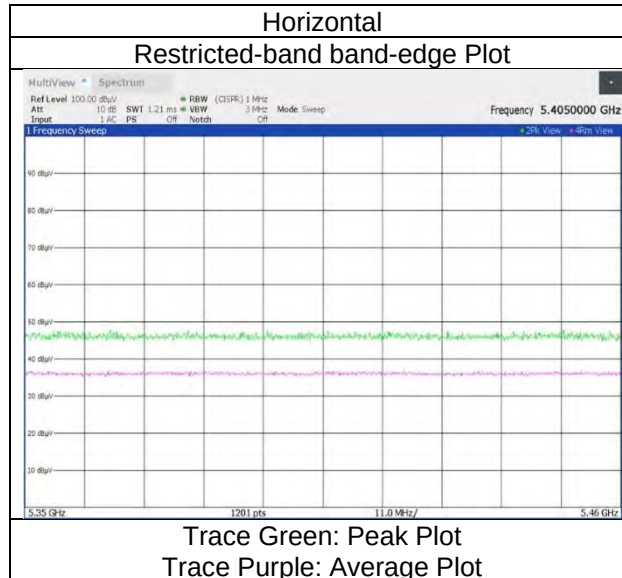

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5530 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11060.000	PK	46.21	37.35	-29.73	-	-9.54	44.29	73.9	29.6	150	0	Floor Noise
Hori.	22120.000	PK	52.35	33.45	13.21	51.01	-9.54	38.46	73.9	35.4	140	222	-
Hori.	5460.000	AV	37.25	32.98	-26.65	-	2.22	45.80	53.9	8.1	400	351	-
Hori.	11060.000	AV	35.28	37.35	-29.73	-	-9.54	33.36	53.9	20.5	150	0	Floor Noise
Hori.	22120.000	AV	48.76	33.45	13.21	51.01	-9.54	34.87	53.9	19.0	140	222	-
Vert.	11060.000	PK	47.56	37.35	-29.73	-	-9.54	45.64	73.9	28.2	150	0	Floor Noise
Vert.	22120.000	PK	50.68	33.45	13.21	51.01	-9.54	36.79	73.9	37.1	156	133	-
Vert.	5460.000	AV	37.16	32.98	-26.65	-	2.22	45.71	53.9	8.1	328	8	-
Vert.	11060.000	AV	35.39	37.35	-29.73	-	-9.54	33.47	53.9	20.4	150	0	Floor Noise
Vert.	22120.000	AV	45.57	33.45	13.21	51.01	-9.54	31.68	53.9	22.2	156	133	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.29	32.98	-26.65	-	-	2.22	56.84	-38.39	-27.0	11.3	400	351	-
Hori.	5470.000	PK	48.77	33.04	-26.64	-	-	2.22	57.39	-37.84	-27.0	10.8	400	351	-
Hori.	16590.000	PK	46.60	39.66	-26.61	-	-	-9.54	50.11	-45.12	-27.0	18.1	150	0	Floor Noise
Vert.	5460.000	PK	48.26	32.98	-26.65	-	-	2.22	56.81	-38.42	-27.0	11.4	328	8	-
Vert.	5470.000	PK	49.13	33.04	-26.64	-	-	2.22	57.75	-37.48	-27.0	10.4	328	8	-
Vert.	16590.000	PK	46.67	39.66	-26.61	-	-	-9.54	50.18	-45.05	-27.0	18.0	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log(10 \wedge (\text{Result [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance : } 3 [m] \wedge 2 / 30 * 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5530 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

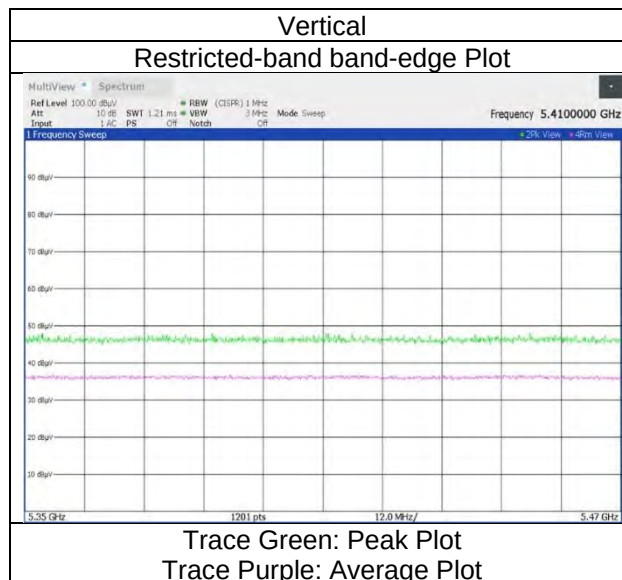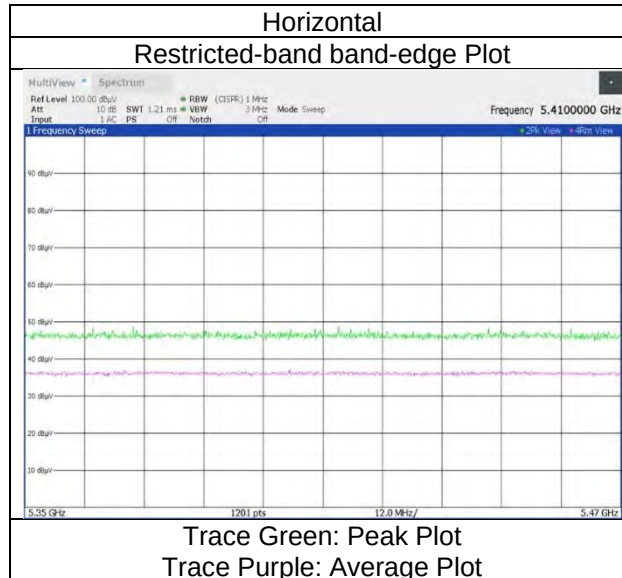

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5610 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11220.000	PK	57.19	37.52	-29.62	-	-9.54	55.55	73.9	18.3	150	234	Floor Noise
Hori.	22440.000	PK	52.37	33.54	13.35	50.88	-9.54	38.84	73.9	35.0	141	252	-
Hori.	11220.000	AV	39.52	37.52	-29.62	-	-9.54	37.88	53.9	16.0	150	234	Floor Noise
Hori.	22440.000	AV	45.90	33.54	13.35	50.88	-9.54	32.37	53.9	21.5	141	252	-
Vert.	11220.000	PK	49.89	37.52	-29.62	-	-9.54	48.25	73.9	25.6	150	131	Floor Noise
Vert.	22440.000	PK	50.12	33.54	13.35	50.88	-9.54	36.59	73.9	37.3	147	181	-
Vert.	11220.000	AV	35.78	37.52	-29.62	-	-9.54	34.14	53.9	19.7	150	131	Floor Noise
Vert.	22440.000	AV	45.45	33.54	13.35	50.88	-9.54	31.92	53.9	21.9	147	181	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.45	33.67	-26.57	-	-	2.22	57.77	-37.46	-27.0	10.4	373	351	-
Hori.	16830.000	PK	46.82	39.34	-26.35	-	-	-9.54	50.27	-44.96	-27.0	17.9	150	0	Floor Noise
Vert.	5725.000	PK	48.65	33.67	-26.57	-	-	2.22	57.97	-37.26	-27.0	10.2	313	7	-
Vert.	16830.000	PK	46.30	39.34	-26.35	-	-	-9.54	49.75	-45.48	-27.0	18.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m]/3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

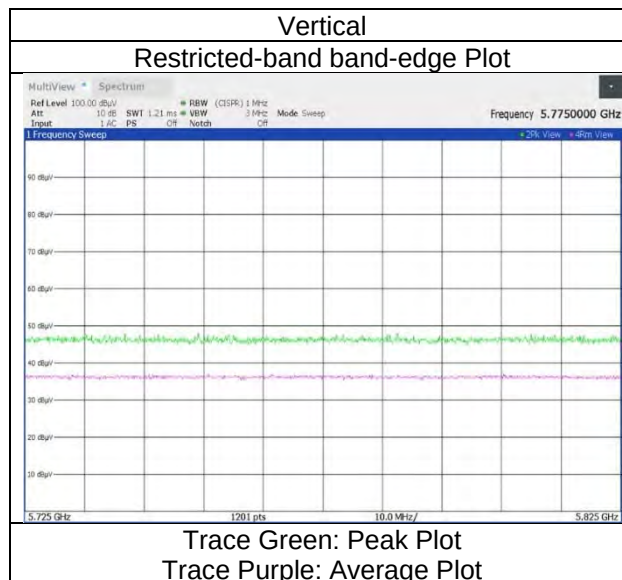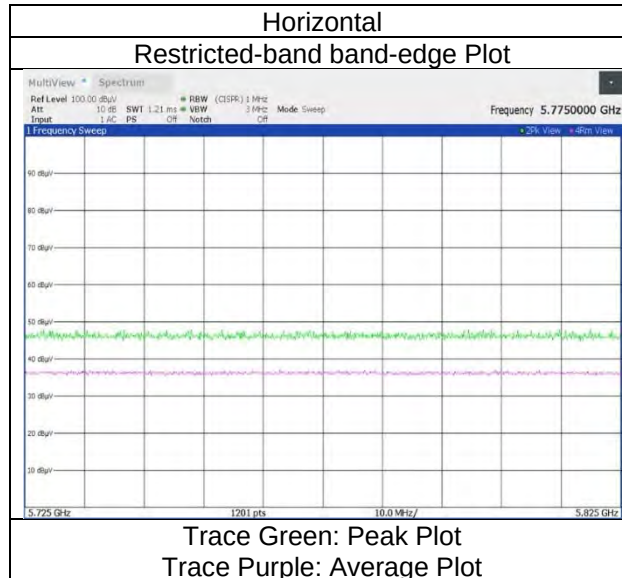

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5775 MHz
------	----------------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz
March 17, 2026	WAC2	21 deg. C	35 % RH	Shiro Kobayashi	6.4 GHz to 10 GHz
March 21, 2026	WAC2	21 deg. C	44 % RH	Makoto Hosaka	10 GHz to 18 GHz
March 24, 2026	WAC2	24 deg. C	28 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	21 deg. C	51 % RH	Hiromasa Sato	26.5 GHz to 40 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11550.000	PK	45.69	38.04	-29.45	-	-9.54	44.74	73.9	29.1	150	0	Floor Noise
Hori.	23100.000	PK	51.99	33.71	13.55	50.63	-9.54	39.08	73.9	34.8	167	214	-
Hori.	11550.000	AV	35.01	38.04	-29.45	-	-9.54	34.06	53.9	19.8	150	0	Floor Noise
Hori.	23100.000	AV	48.64	33.71	13.55	50.63	-9.54	35.73	53.9	18.1	167	214	-
Vert.	11550.000	PK	46.18	38.04	-29.45	-	-9.54	45.23	73.9	28.6	150	0	Floor Noise
Vert.	23100.000	PK	51.08	33.71	13.55	50.63	-9.54	38.17	73.9	35.7	162	44	-
Vert.	11550.000	AV	35.23	38.04	-29.45	-	-9.54	34.28	53.9	19.6	150	0	Floor Noise
Vert.	23100.000	AV	47.22	33.71	13.55	50.63	-9.54	34.31	53.9	19.5	162	44	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.34	33.66	-26.58	-	-	2.22	57.64	-37.59	-27.0	10.5	380	359	-
Hori.	5700.000	PK	48.62	33.69	-26.58	-	-	2.22	57.95	-37.28	10.0	47.2	380	359	-
Hori.	5720.000	PK	48.72	33.66	-26.58	-	-	2.22	58.02	-37.21	15.6	52.8	380	359	-
Hori.	5725.000	PK	53.24	33.67	-26.57	-	-	2.22	62.56	-32.67	27.0	59.6	380	359	-
Hori.	5850.000	PK	48.87	33.70	-26.56	-	-	2.22	58.23	-37.00	27.0	64.0	380	359	-
Hori.	5855.000	PK	48.52	33.71	-26.56	-	-	2.22	57.89	-37.34	15.6	52.9	380	359	-
Hori.	5875.000	PK	48.34	33.73	-26.54	-	-	2.22	57.75	-37.48	10.0	47.4	380	359	-
Hori.	5925.000	PK	48.25	33.85	-26.53	-	-	2.22	57.79	-37.44	-27.0	10.4	380	359	-
Hori.	17325.000	PK	45.92	40.27	-25.85	-	-	-9.54	50.80	-44.43	-27.0	17.4	150	0	Floor Noise
Vert.	5650.000	PK	48.36	33.66	-26.58	-	-	2.22	57.66	-37.57	-27.0	10.5	333	5	-
Vert.	5700.000	PK	48.39	33.69	-26.58	-	-	2.22	57.72	-37.51	10.0	47.5	333	5	-
Vert.	5720.000	PK	50.35	33.66	-26.58	-	-	2.22	59.65	-35.58	15.6	51.1	333	5	-
Vert.	5725.000	PK	54.81	33.67	-26.57	-	-	2.22	64.13	-31.10	27.0	58.1	333	5	-
Vert.	5850.000	PK	48.71	33.70	-26.56	-	-	2.22	58.07	-37.16	27.0	64.1	333	5	-
Vert.	5855.000	PK	48.54	33.71	-26.56	-	-	2.22	57.91	-37.32	15.6	52.9	333	5	-
Vert.	5875.000	PK	48.32	33.73	-26.54	-	-	2.22	57.73	-37.50	10.0	47.5	333	5	-
Vert.	5925.000	PK	48.10	33.85	-26.53	-	-	2.22	57.64	-37.59	-27.0	10.5	333	5	-
Vert.	17325.000	PK	45.96	40.27	-25.85	-	-	-9.54	50.84	-44.39	-27.0	17.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \text{LOG}((10 \wedge (\text{Result [dBuV/m]} / 20)) \cdot 10 \wedge (-6)) \cdot \text{Distance} : 3\text{ [m]} \wedge 2 / 30 \cdot 10 \wedge 3)$



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDM), MIMO 5775 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 09, 2026	WAC2	22 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

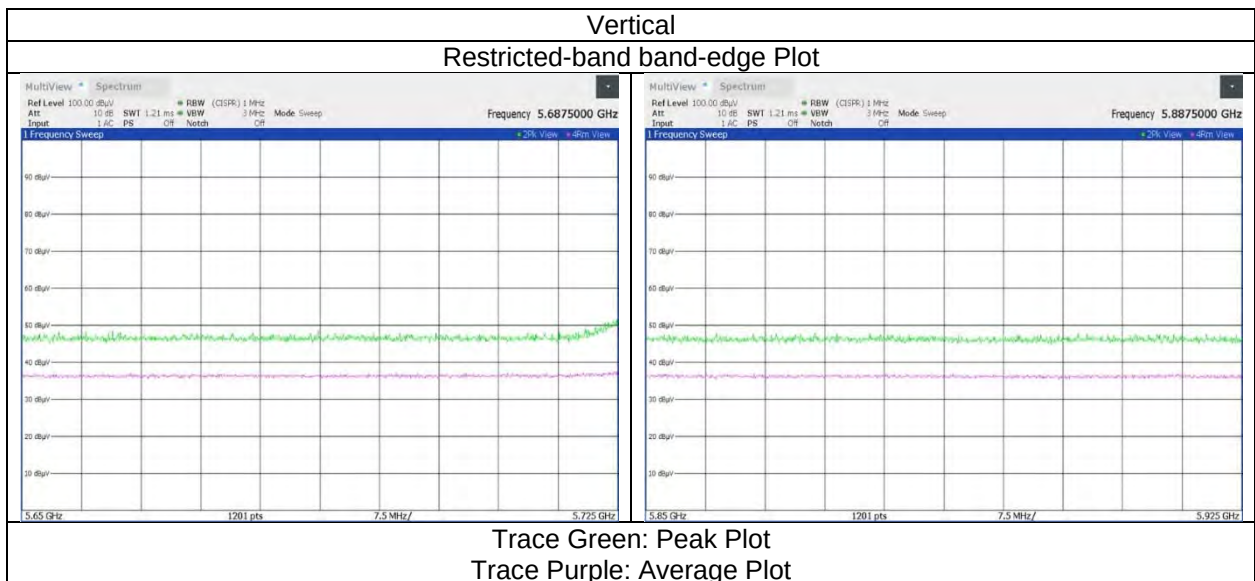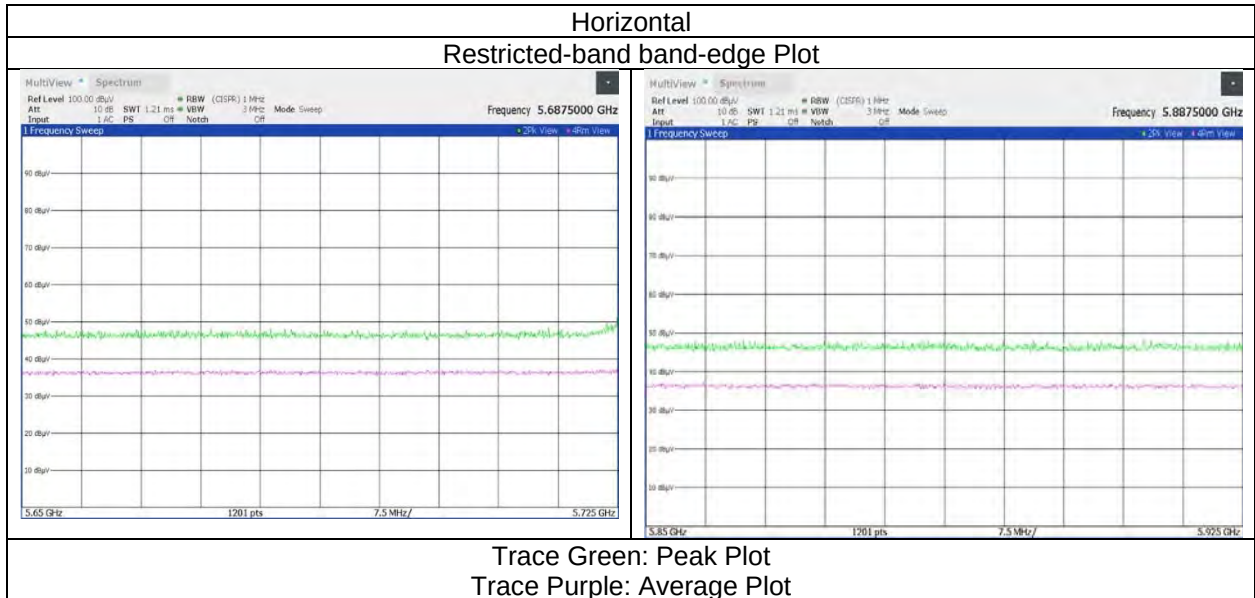

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 0, MIMO 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.88	32.61	-27.03	-	2.22	56.68	73.9	17.2	391	6	-
Hori.	5150.000	AV	37.56	32.61	-27.03	-	2.22	45.36	53.9	8.5	391	6	-
Vert.	5150.000	PK	48.62	32.61	-27.03	-	2.22	56.42	73.9	17.4	228	354	-
Vert.	5150.000	AV	37.50	32.61	-27.03	-	2.22	45.30	53.9	8.6	228	354	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22[dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54[dB]$

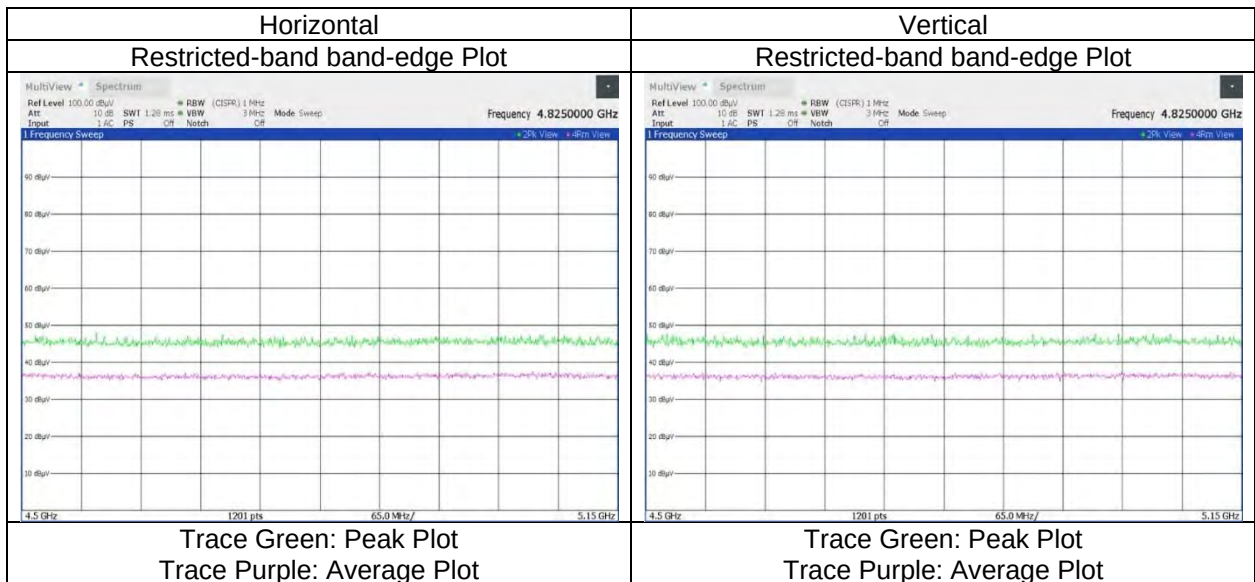

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 36, MIMO 5290 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.87	32.52	-26.78	-	2.22	57.83	73.9	16.0	385	351	-
Hori.	5350.000	AV	37.59	32.52	-26.78	-	2.22	45.55	53.9	8.3	385	351	-
Vert.	5350.000	PK	49.65	32.52	-26.78	-	2.22	57.61	73.9	16.2	293	1	-
Vert.	5350.000	AV	37.55	32.52	-26.78	-	2.22	45.51	53.9	8.3	293	1	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

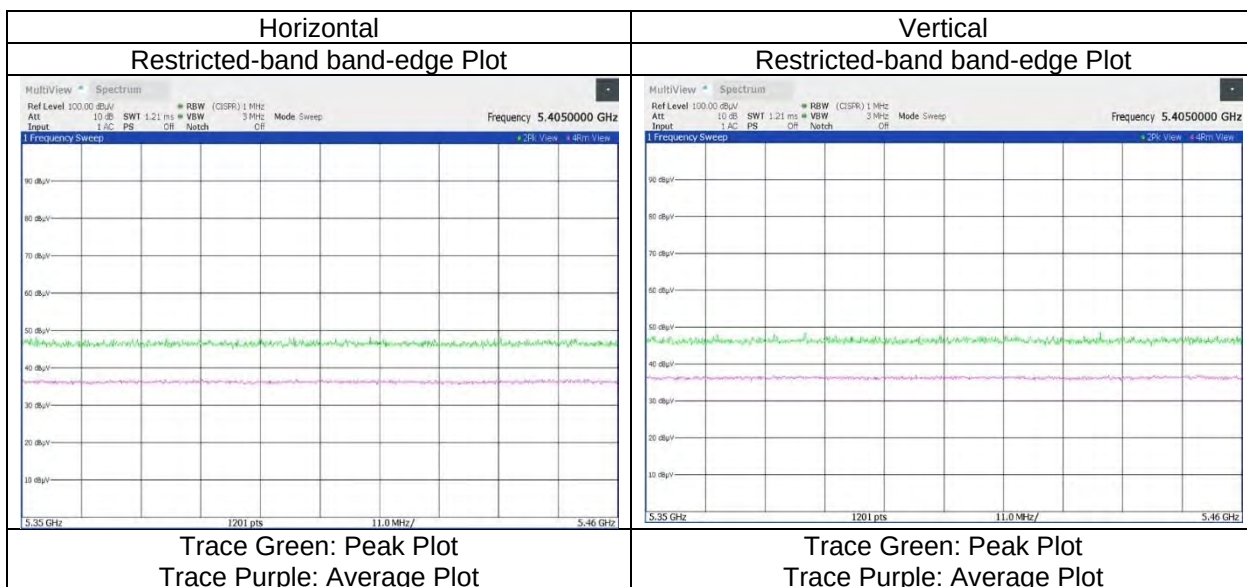

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 0, MIMO 5530 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.31	32.98	-26.65	-	2.22	45.86	53.9	8.0	379	0	-
Vert.	5460.000	AV	37.44	32.98	-26.65	-	2.22	45.99	53.9	7.9	294	12	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.63	32.98	-26.65	-	-	2.22	57.18	-38.05	-27.0	11.0	379	0	-
Hori.	5470.000	PK	49.57	33.04	-26.64	-	-	2.22	58.19	-37.04	-27.0	10.0	379	0	-
Vert.	5460.000	PK	48.87	32.98	-26.65	-	-	2.22	57.42	-37.81	-27.0	10.8	294	12	-
Vert.	5470.000	PK	49.88	33.04	-26.64	-	-	2.22	58.50	-36.73	-27.0	9.7	294	12	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 36, MIMO 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5725.000	PK	48.95	33.67	-26.57	-	-	2.22	58.27	-36.96	-27.0	9.9	374	349	-	
Vert.	5725.000	PK	49.21	33.67	-26.57	-	-	2.22	58.53	-36.70	-27.0	9.7	339	0	-	


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

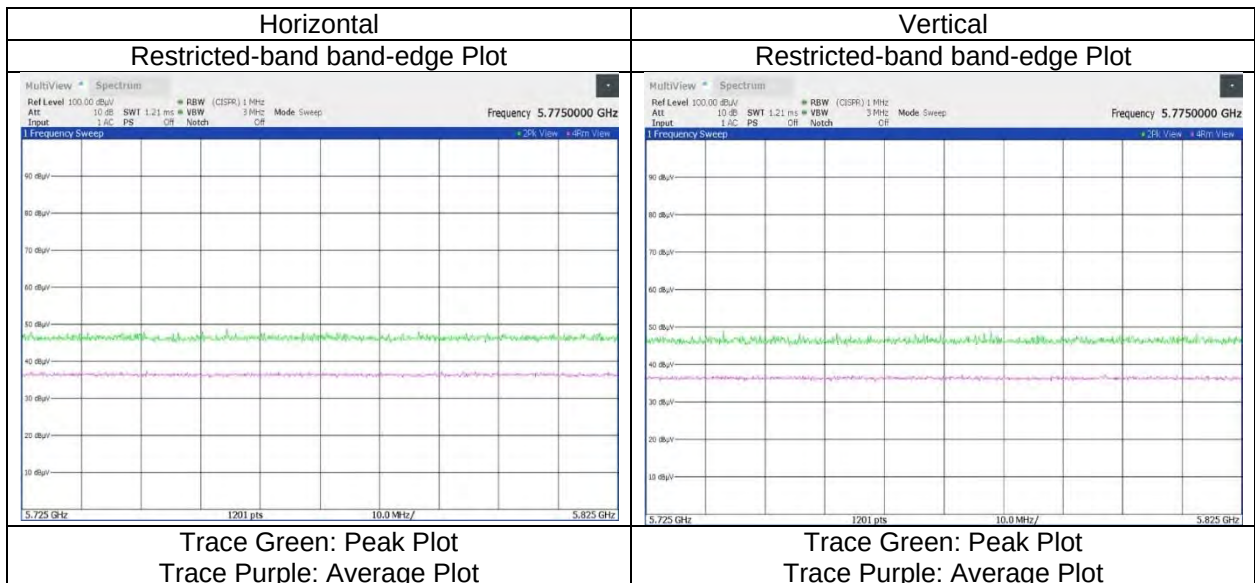

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 0, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	23 deg. C	26 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.75	33.66	-26.58	-	-	2.22	58.05	-37.18	-27.0	10.1	376	3	-
Hori.	5700.000	PK	49.41	33.69	-26.58	-	-	2.22	58.74	-36.49	10.0	46.4	376	3	-
Hori.	5720.000	PK	53.14	33.66	-26.58	-	-	2.22	62.44	-32.79	15.6	48.3	376	3	-
Hori.	5725.000	PK	60.22	33.67	-26.57	-	-	2.22	69.54	-25.69	27.0	52.6	376	3	-
Vert.	5650.000	PK	48.70	33.66	-26.58	-	-	2.22	58.00	-37.23	-27.0	10.2	349	351	-
Vert.	5700.000	PK	49.65	33.69	-26.58	-	-	2.22	58.98	-36.25	10.0	46.2	349	351	-
Vert.	5720.000	PK	56.01	33.66	-26.58	-	-	2.22	65.31	-29.92	15.6	45.5	349	351	-
Vert.	5725.000	PK	62.64	33.67	-26.57	-	-	2.22	71.96	-23.27	27.0	50.2	349	351	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \log \left((10^{\frac{\text{Result [dBuV/m]}}{20}}) \cdot 10^{(-6)} \cdot \text{Distance} : 3 [\text{m}] \right)^2 \cdot 30 \cdot 10^{\frac{3}{10}}$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20 \log (3.87 [\text{m}] / 3.0 [\text{m}]) = 2.22 [\text{dB}]$

10 GHz to 40 GHz : $20 \log (1.00 [\text{m}] / 3.0 [\text{m}]) = -9.54 [\text{dB}]$

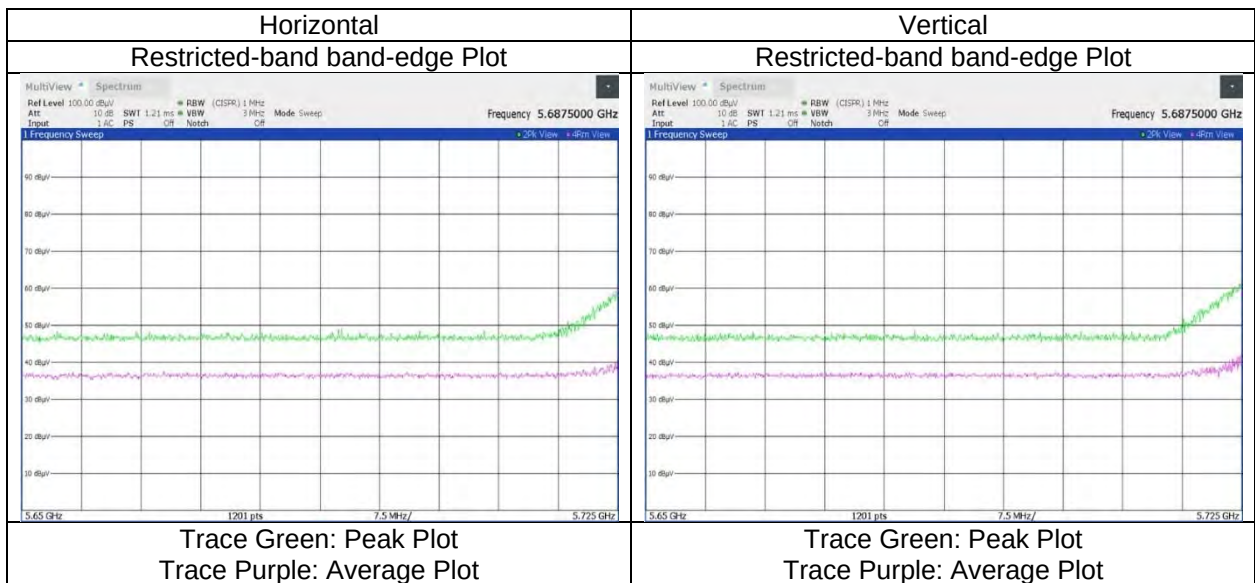

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 26-tone RU, RU Index 36, MIMO 5775 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.69	33.70	-26.56	-	-	2.22	58.05	-37.18	27.0	64.1	356	15	-
Hori.	5855.000	PK	48.42	33.71	-26.56	-	-	2.22	57.79	-37.44	15.6	53.0	356	15	-
Hori.	5875.000	PK	48.40	33.73	-26.54	-	-	2.22	57.81	-37.42	10.0	47.4	356	15	-
Hori.	5925.000	PK	48.36	33.85	-26.53	-	-	2.22	57.90	-37.33	-27.0	10.3	356	15	-
Vert.	5850.000	PK	48.30	33.70	-26.56	-	-	2.22	57.66	-37.57	27.0	64.5	351	1	-
Vert.	5855.000	PK	48.36	33.71	-26.56	-	-	2.22	57.73	-37.50	15.6	53.1	351	1	-
Vert.	5875.000	PK	48.60	33.73	-26.54	-	-	2.22	58.01	-37.22	10.0	47.2	351	1	-
Vert.	5925.000	PK	48.42	33.85	-26.53	-	-	2.22	57.96	-37.27	-27.0	10.2	351	1	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

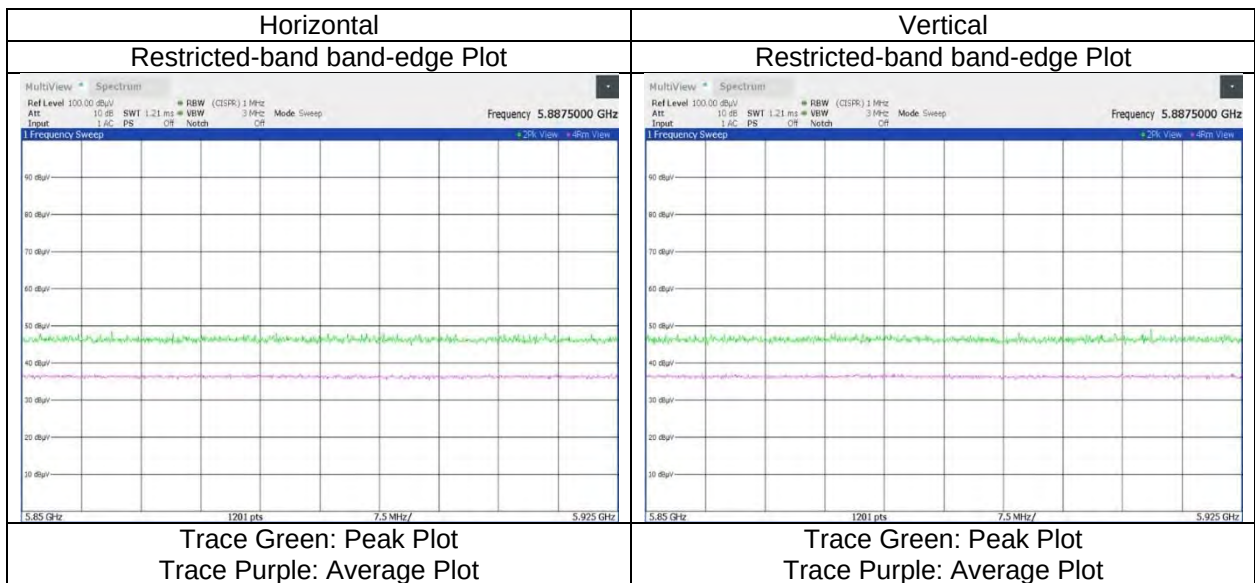

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 37, MIMO 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.07	32.61	-27.03	-	2.22	56.87	73.9	17.0	374	3	-
Hori.	5150.000	AV	37.73	32.61	-27.03	-	2.22	45.53	53.9	8.3	374	3	-
Vert.	5150.000	PK	48.92	32.61	-27.03	-	2.22	56.72	73.9	17.1	369	14	-
Vert.	5150.000	AV	37.65	32.61	-27.03	-	2.22	45.45	53.9	8.4	369	14	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 52, MIMO 5290 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.87	32.52	-26.78	-	2.22	57.83	73.9	16.0	349	352	-
Hori.	5350.000	AV	37.60	32.52	-26.78	-	2.22	45.56	53.9	8.3	349	352	-
Vert.	5350.000	PK	49.56	32.52	-26.78	-	2.22	57.52	73.9	16.3	310	341	-
Vert.	5350.000	AV	37.54	32.52	-26.78	-	2.22	45.50	53.9	8.4	310	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

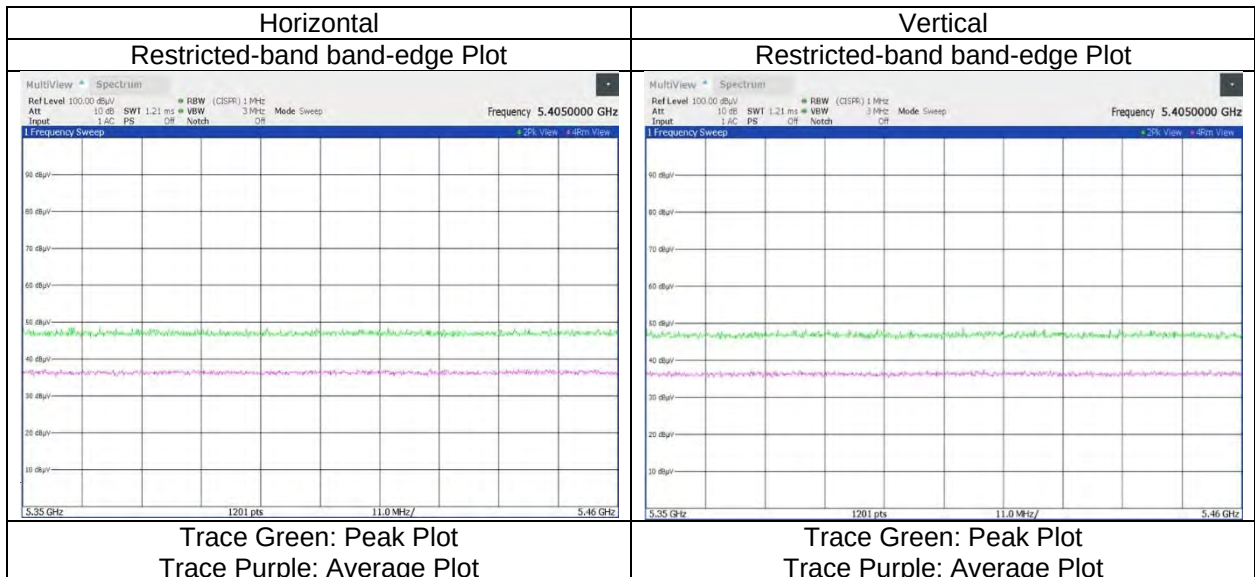

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 37, MIMO 5530 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.03	32.98	-26.65	-	2.22	45.58	53.9	8.3	397	359	-
Vert.	5460.000	AV	36.94	32.98	-26.65	-	2.22	45.49	53.9	8.4	275	10	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Fac. : 1

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.97	32.98	-26.65	-	-	2.22	56.52	-38.71	-27.0	11.7	397	359	-
Hori.	5470.000	PK	48.29	33.04	-26.64	-	-	2.22	56.91	-38.32	-27.0	11.3	397	359	-
Vert.	5460.000	PK	48.23	32.98	-26.65	-	-	2.22	56.78	-38.45	-27.0	11.4	275	10	-
Vert.	5470.000	PK	48.64	33.04	-26.64	-	-	2.22	57.26	-37.97	-27.0	10.9	275	10	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

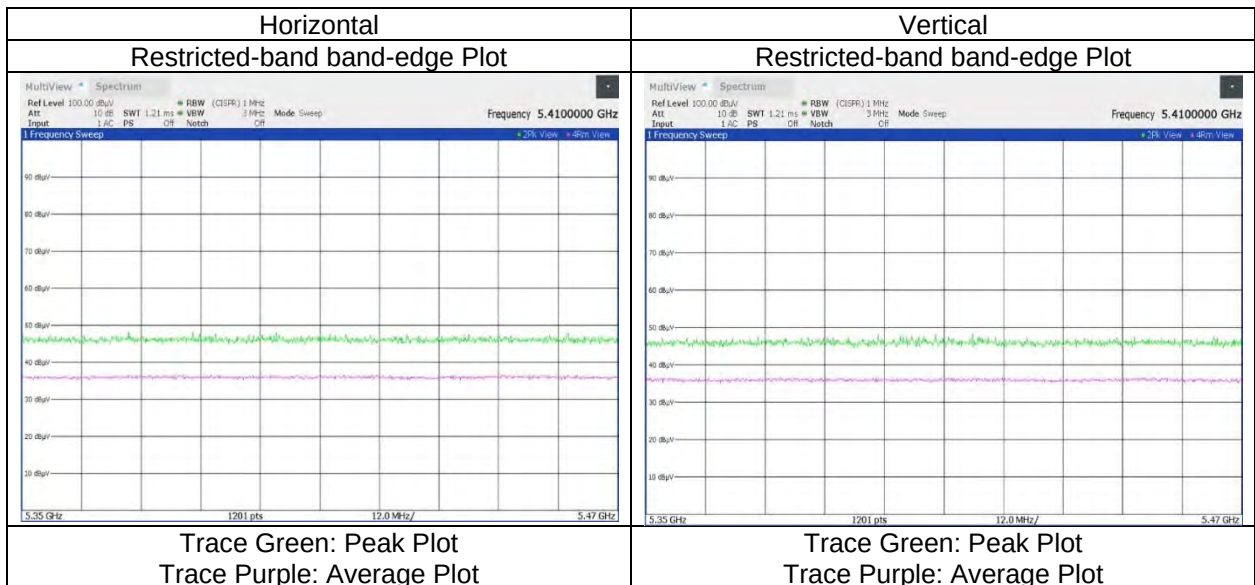

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 52, MIMO 5610 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.42	33.67	-26.57	-	-	2.22	57.74	-37.49	-27.0	10.4	385	350	-
Vert.	5725.000	PK	48.78	33.67	-26.57	-	-	2.22	58.10	-37.13	-27.0	10.1	207	21	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

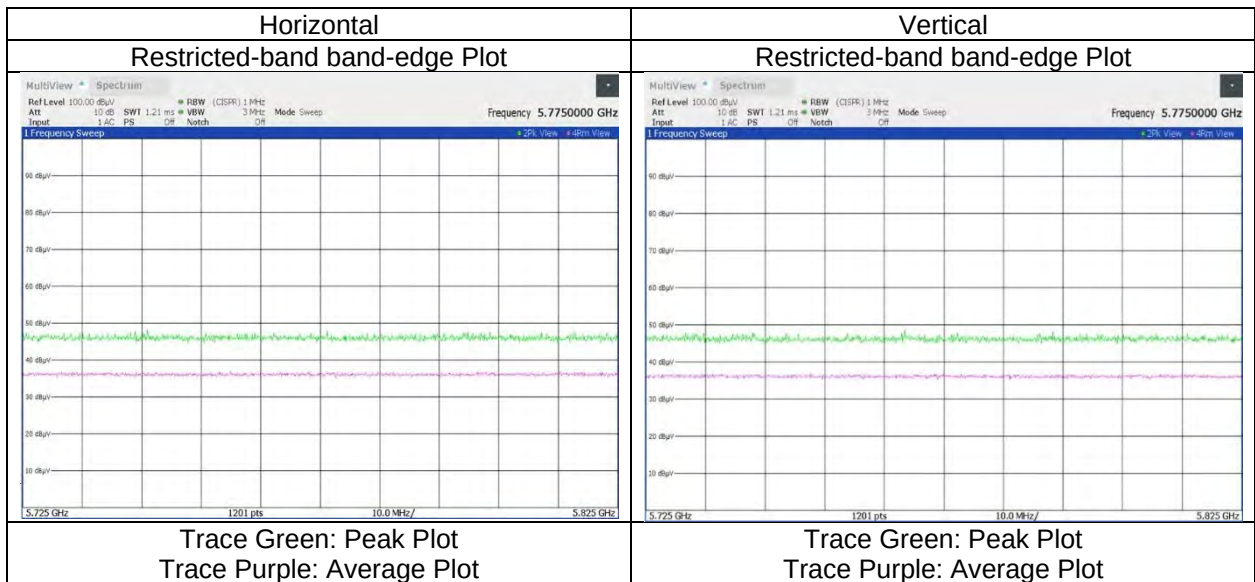

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 37, MIMO 5775 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.30	33.66	-26.58	-	-	2.22	57.60	-37.63	-27.0	10.6	377	2	-
Hori.	5700.000	PK	48.21	33.69	-26.58	-	-	2.22	57.54	-37.69	10.0	47.6	377	2	-
Hori.	5720.000	PK	51.53	33.66	-26.58	-	-	2.22	60.83	-34.40	15.6	50.0	377	2	-
Hori.	5725.000	PK	57.78	33.67	-26.57	-	-	2.22	67.10	-28.13	27.0	55.1	377	2	-
Vert.	5650.000	PK	48.12	33.66	-26.58	-	-	2.22	57.42	-37.81	-27.0	10.8	311	13	-
Vert.	5700.000	PK	48.06	33.69	-26.58	-	-	2.22	57.39	-37.84	10.0	47.8	311	13	-
Vert.	5720.000	PK	52.94	33.66	-26.58	-	-	2.22	62.24	-32.99	15.6	48.5	311	13	-
Vert.	5725.000	PK	59.50	33.67	-26.57	-	-	2.22	68.82	-26.41	27.0	53.4	311	13	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 \cdot \log \left((10^{\frac{\text{Result [dBuV/m]}}{20}}) \cdot 10^{-6} \cdot \text{Distance} : 3 [\text{m}] \right)^2 / 30 \cdot 10^{-3}$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20 \log (3.87 [\text{m}] / 3.0 [\text{m}]) = 2.22 [\text{dB}]$

10 GHz to 40 GHz : $20 \log (1.00 [\text{m}] / 3.0 [\text{m}]) = -9.54 [\text{dB}]$

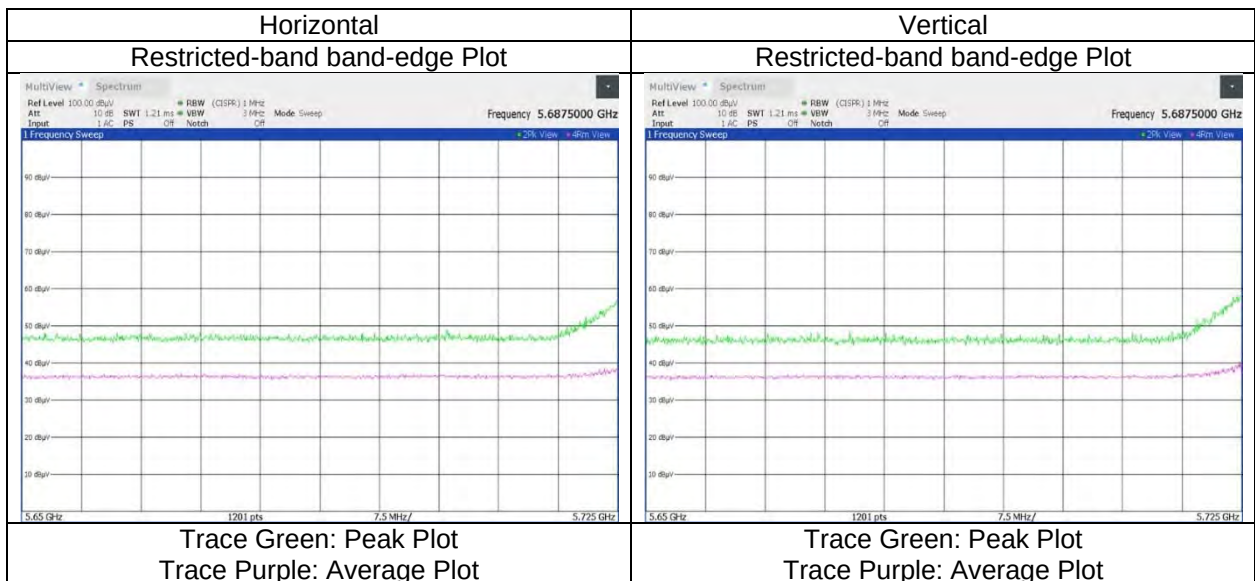

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 52-tone RU, RU Index 52, MIMO 5775 MHz				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	48.57	33.70	-26.56	-	-	2.22	57.93	-37.30	27.0	64.3	368	350	-
Hori.	5855.000	PK	48.40	33.71	-26.56	-	-	2.22	57.77	-37.46	15.6	53.0	368	350	-
Hori.	5875.000	PK	48.50	33.73	-26.54	-	-	2.22	57.91	-37.32	10.0	47.3	368	350	-
Hori.	5925.000	PK	48.33	33.85	-26.53	-	-	2.22	57.87	-37.36	-27.0	10.3	368	350	-
Vert.	5850.000	PK	48.31	33.70	-26.56	-	-	2.22	57.67	-37.56	27.0	64.5	358	1	-
Vert.	5855.000	PK	48.21	33.71	-26.56	-	-	2.22	57.58	-37.65	15.6	53.2	358	1	-
Vert.	5875.000	PK	48.30	33.73	-26.54	-	-	2.22	57.71	-37.52	10.0	47.5	358	1	-
Vert.	5925.000	PK	48.41	33.85	-26.53	-	-	2.22	57.95	-37.28	-27.0	10.2	358	1	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

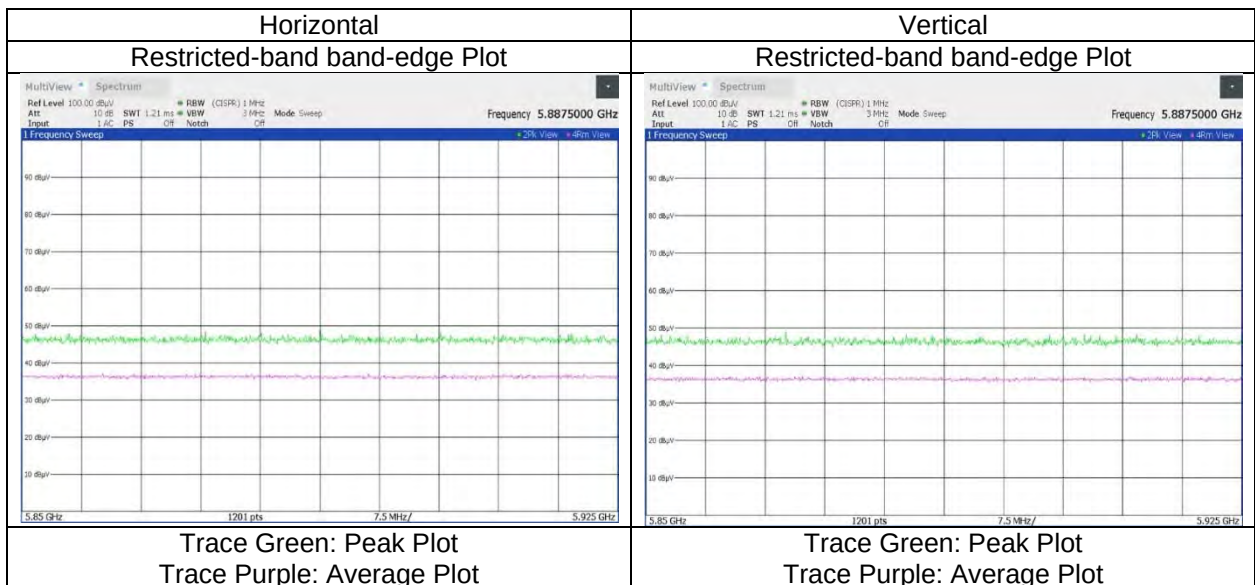

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 53, MIMO 5210 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.37	32.61	-27.03	-	2.22	57.17	73.9	16.7	374	2	-
Hori.	5150.000	AV	37.61	32.61	-27.03	-	2.22	45.41	53.9	8.4	374	2	-
Vert.	5150.000	PK	49.10	32.61	-27.03	-	2.22	56.90	73.9	17.0	227	354	-
Vert.	5150.000	AV	37.60	32.61	-27.03	-	2.22	45.40	53.9	8.5	227	354	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

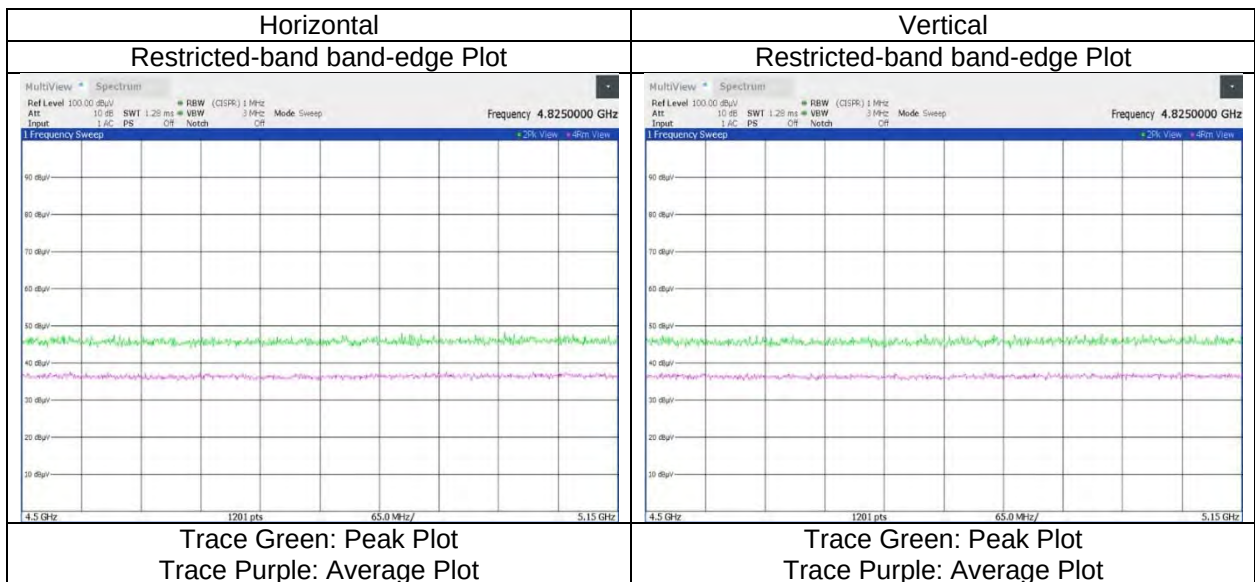

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 60, MIMO 5290 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.43	32.52	-26.78	-	2.22	57.39	73.9	16.5	349	350	-
Hori.	5350.000	AV	37.53	32.52	-26.78	-	2.22	45.49	53.9	8.4	349	350	-
Vert.	5350.000	PK	49.06	32.52	-26.78	-	2.22	57.02	73.9	16.8	202	341	-
Vert.	5350.000	AV	37.46	32.52	-26.78	-	2.22	45.42	53.9	8.4	202	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

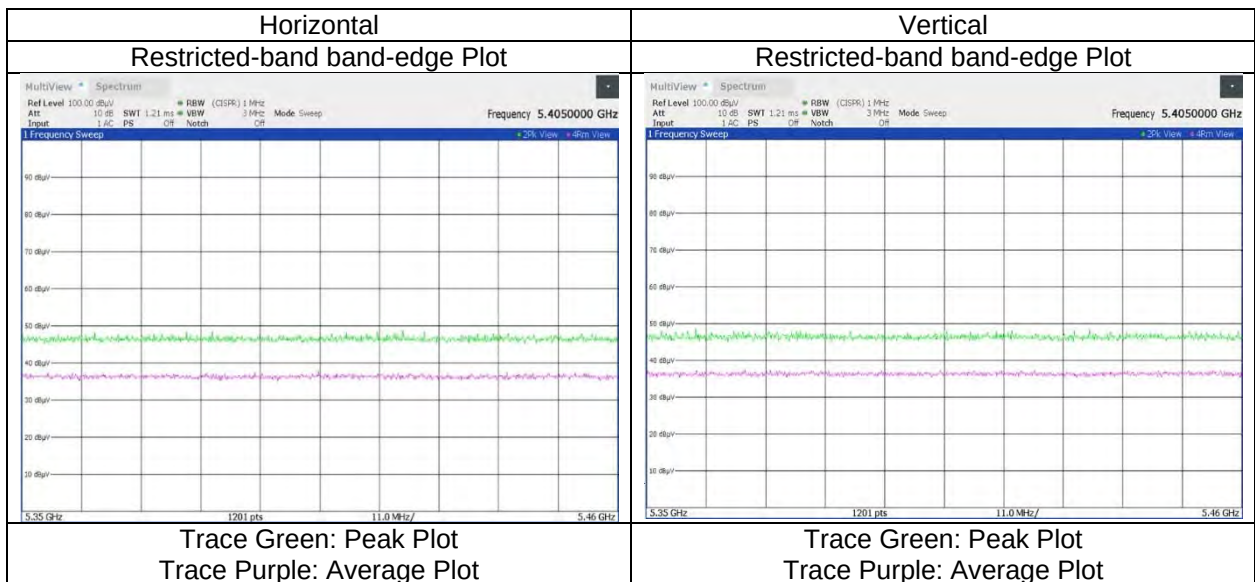

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 53, MIMO 5530 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	36.96	32.98	-26.65	-	2.22	45.51	53.9	8.3	397	359	-
Vert.	5460.000	AV	36.96	32.98	-26.65	-	2.22	45.51	53.9	8.3	294	2	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.92	32.98	-26.65	-	-	2.22	56.47	-38.76	-27.0	11.7	397	359	-
Hori.	5470.000	PK	48.11	33.04	-26.64	-	-	2.22	56.73	-38.50	-27.0	11.5	397	359	-
Vert.	5460.000	PK	48.17	32.98	-26.65	-	-	2.22	56.72	-38.51	-27.0	11.5	294	2	-
Vert.	5470.000	PK	48.45	33.04	-26.64	-	-	2.22	57.07	-38.16	-27.0	11.1	294	2	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 60, MIMO 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5725.000	PK	48.18	33.67	-26.57	-	-	2.22	57.50	-37.73	-27.0	10.7	385	350	-	-
Vert.	5725.000	PK	48.30	33.67	-26.57	-	-	2.22	57.62	-37.61	-27.0	10.6	208	21	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

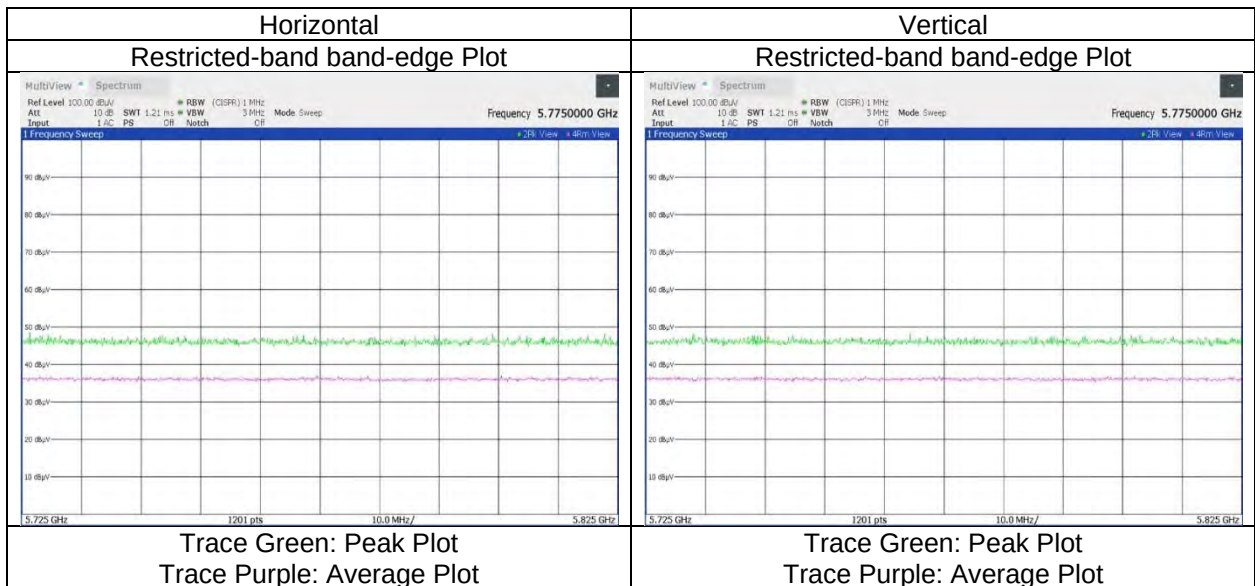

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 53, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	48.32	33.66	-26.58	-	-	2.22	57.62	-37.61	-27.0	10.6	377	2	-
Hori.	5700.000	PK	48.19	33.69	-26.58	-	-	2.22	57.52	-37.71	10.0	47.7	377	2	-
Hori.	5720.000	PK	50.62	33.66	-26.58	-	-	2.22	59.92	-35.31	15.6	50.9	377	2	-
Hori.	5725.000	PK	55.72	33.67	-26.57	-	-	2.22	65.04	-30.19	27.0	57.1	377	2	-
Vert.	5650.000	PK	48.28	33.66	-26.58	-	-	2.22	57.58	-37.65	-27.0	10.6	315	4	-
Vert.	5700.000	PK	48.21	33.69	-26.58	-	-	2.22	57.54	-37.69	10.0	47.6	315	4	-
Vert.	5720.000	PK	51.29	33.66	-26.58	-	-	2.22	60.59	-34.64	15.6	50.2	315	4	-
Vert.	5725.000	PK	56.86	33.67	-26.57	-	-	2.22	66.18	-29.05	27.0	56.0	315	4	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

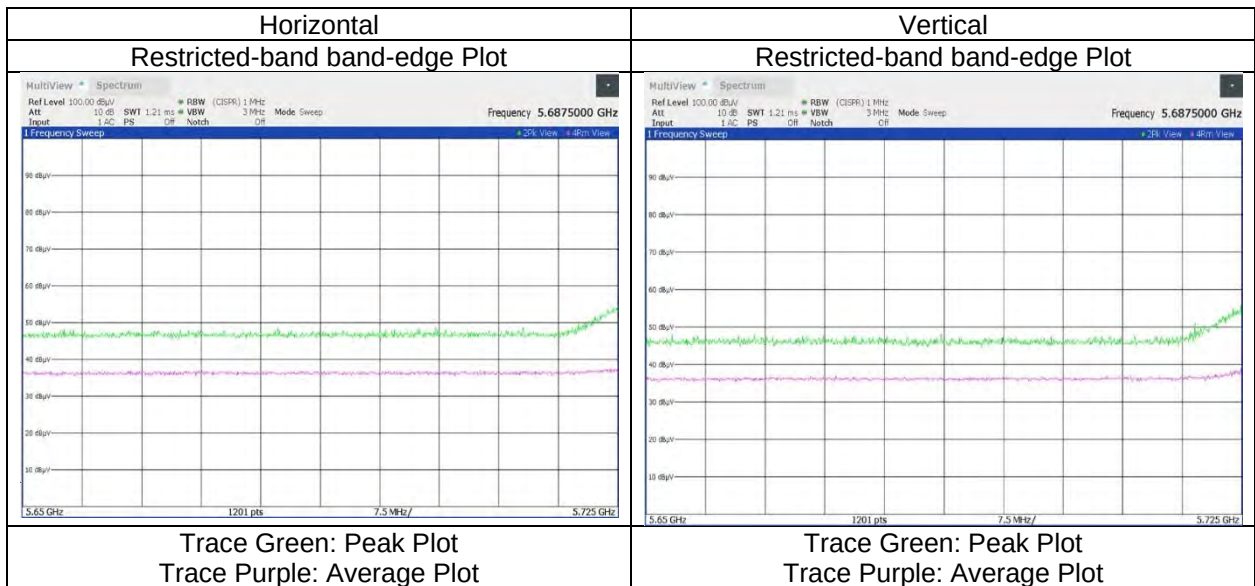

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 106-tone RU, RU Index 60, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	48.61	33.70	-26.56	-	-	2.22	57.97	-37.26	27.0	64.2	368	350	-	-
Hori.	5855.000	PK	48.30	33.71	-26.56	-	-	2.22	57.67	-37.56	15.6	53.1	368	350	-	-
Hori.	5875.000	PK	48.40	33.73	-26.54	-	-	2.22	57.81	-37.42	10.0	47.4	368	350	-	-
Hori.	5925.000	PK	48.41	33.85	-26.53	-	-	2.22	57.95	-37.28	-27.0	10.2	368	350	-	-
Vert.	5850.000	PK	48.60	33.70	-26.56	-	-	2.22	57.96	-37.27	27.0	64.2	353	2	-	-
Vert.	5855.000	PK	48.26	33.71	-26.56	-	-	2.22	57.63	-37.60	15.6	53.2	353	2	-	-
Vert.	5875.000	PK	48.14	33.73	-26.54	-	-	2.22	57.55	-37.68	10.0	47.6	353	2	-	-
Vert.	5925.000	PK	48.51	33.85	-26.53	-	-	2.22	58.05	-37.18	-27.0	10.1	353	2	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

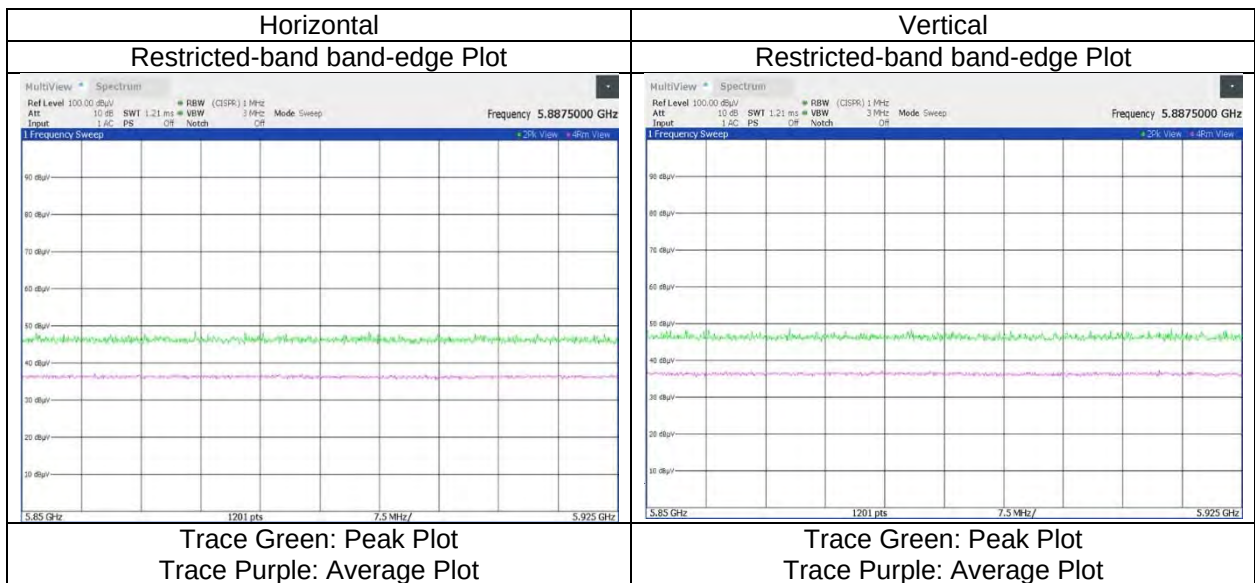

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 61, MIMO 5210 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.23	32.61	-27.03	-	2.22	57.03	73.9	16.8	374	3	-
Hori.	5150.000	AV	37.60	32.61	-27.03	-	2.22	45.40	53.9	8.5	374	3	-
Vert.	5150.000	PK	49.12	32.61	-27.03	-	2.22	56.92	73.9	16.9	227	355	-
Vert.	5150.000	AV	37.56	32.61	-27.03	-	2.22	45.36	53.9	8.5	227	355	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

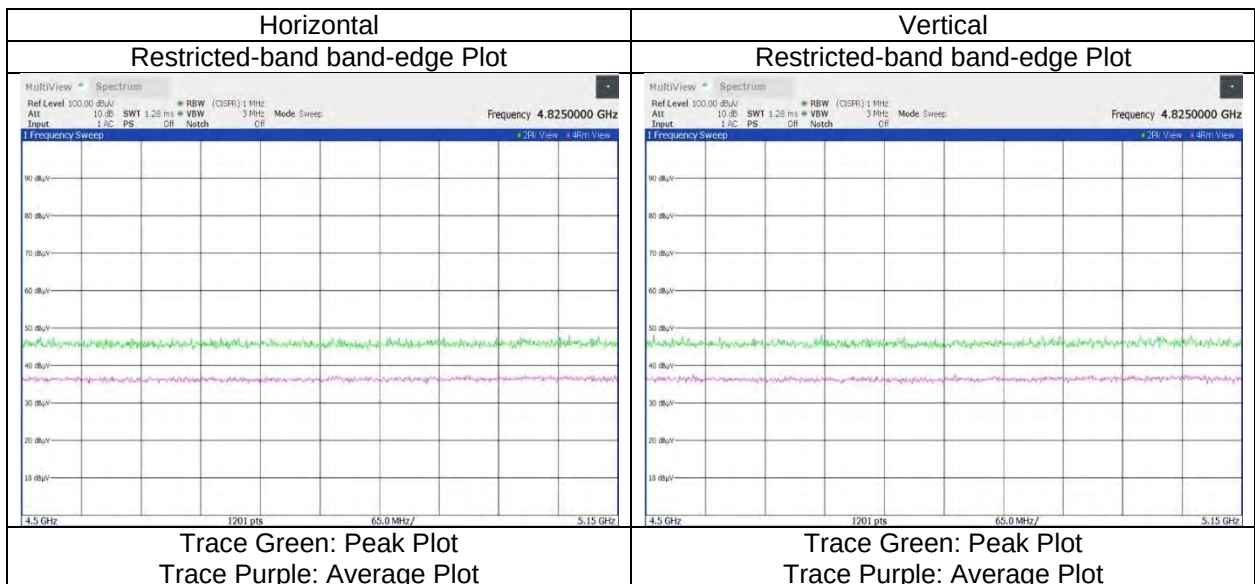

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 64, MIMO 5290 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.35	32.52	-26.78	-	2.22	57.31	73.9	16.5	386	350	-
Hori.	5350.000	AV	37.48	32.52	-26.78	-	2.22	45.44	53.9	8.4	386	350	-
Vert.	5350.000	PK	48.86	32.52	-26.78	-	2.22	56.82	73.9	17.0	218	341	-
Vert.	5350.000	AV	37.44	32.52	-26.78	-	2.22	45.40	53.9	8.5	218	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

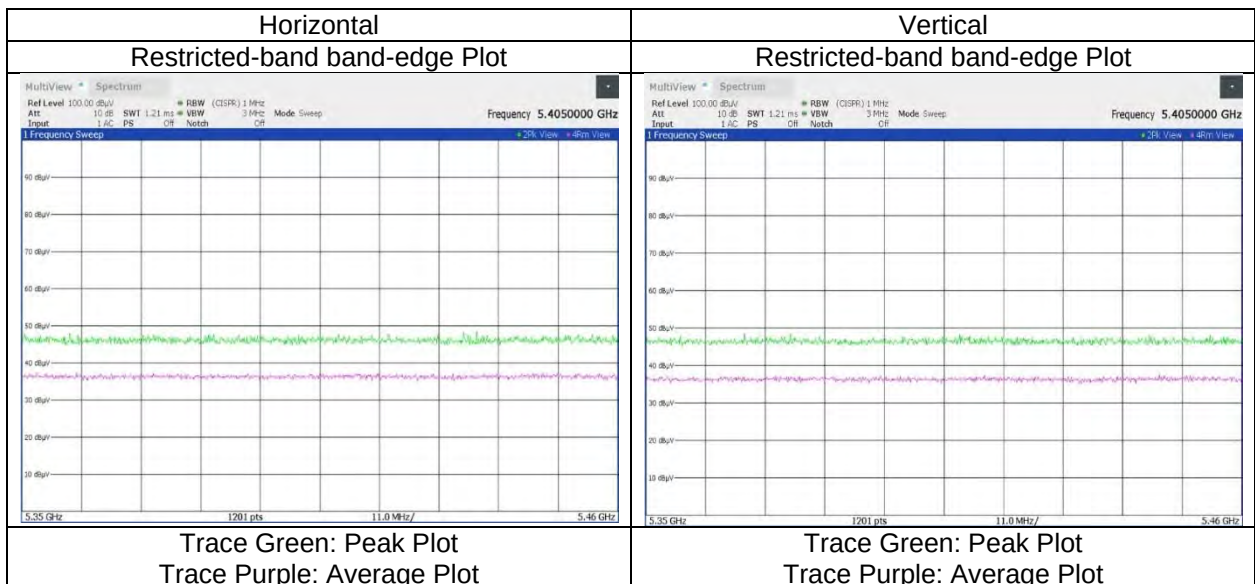

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 61, MIMO 5530 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	36.97	32.98	-26.65	-	2.22	45.52	53.9	8.3	397	359	-
Vert.	5460.000	AV	37.03	32.98	-26.65	-	2.22	45.58	53.9	8.3	293	355	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.89	32.98	-26.65	-	-	2.22	56.44	-38.79	-27.0	11.7	397	359	-
Hori.	5470.000	PK	47.91	33.04	-26.64	-	-	2.22	56.53	-38.70	-27.0	11.7	397	359	-
Vert.	5460.000	PK	47.96	32.98	-26.65	-	-	2.22	56.51	-38.72	-27.0	11.7	293	355	-
Vert.	5470.000	PK	47.99	33.04	-26.64	-	-	2.22	56.61	-38.62	-27.0	11.6	293	355	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \log((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{-3})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87 [m] / 3.0 [m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00 [m] / 3.0 [m]) = -9.54 [dB]$

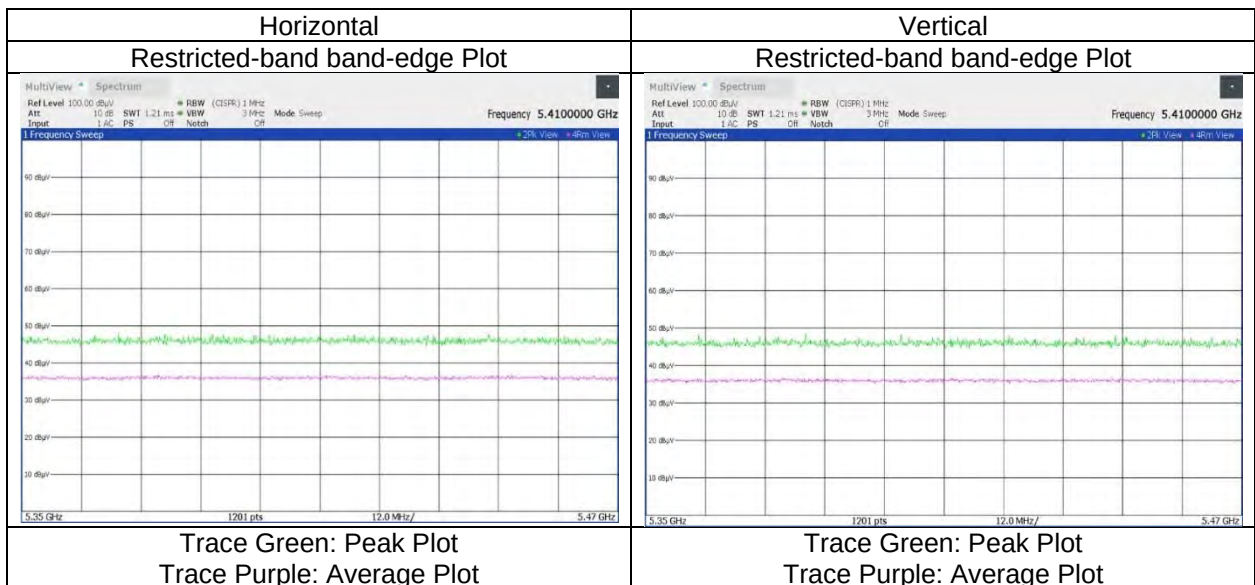

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 64, MIMO 5610 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.08	33.67	-26.57	-	-	2.22	57.40	-37.83	-27.0	10.8	385	350	-
Vert.	5725.000	PK	48.29	33.67	-26.57	-	-	2.22	57.61	-37.62	-27.0	10.6	210	20	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20)) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

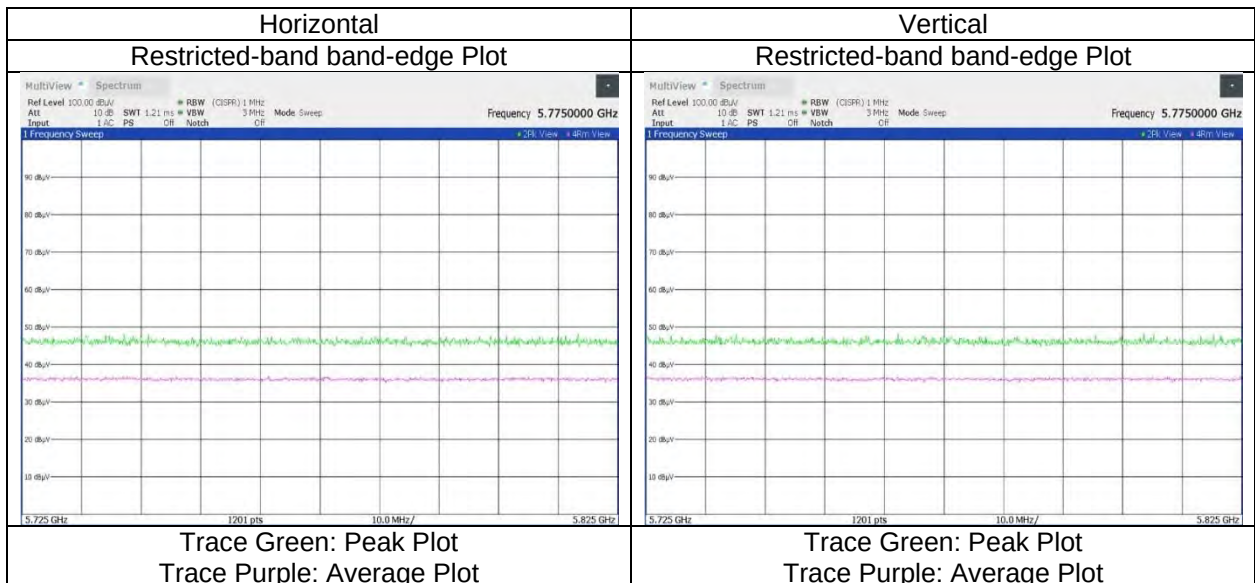

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 61, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5650.000	PK	48.37	33.66	-26.58	-	-	2.22	57.67	-37.56	-27.0	10.5	377	2	-	-
Hori.	5700.000	PK	48.23	33.69	-26.58	-	-	2.22	57.56	-37.67	10.0	47.6	377	2	-	-
Hori.	5720.000	PK	49.20	33.66	-26.58	-	-	2.22	58.50	-36.73	15.6	52.3	377	2	-	-
Hori.	5725.000	PK	53.44	33.67	-26.57	-	-	2.22	62.76	-32.47	27.0	59.4	377	2	-	-
Vert.	5650.000	PK	48.26	33.66	-26.58	-	-	2.22	57.56	-37.67	-27.0	10.6	321	15	-	-
Vert.	5700.000	PK	48.15	33.69	-26.58	-	-	2.22	57.48	-37.75	10.0	47.7	321	15	-	-
Vert.	5720.000	PK	49.97	33.66	-26.58	-	-	2.22	59.27	-35.96	15.6	51.5	321	15	-	-
Vert.	5725.000	PK	54.65	33.67	-26.57	-	-	2.22	63.97	-31.26	27.0	58.2	321	15	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Attenu or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

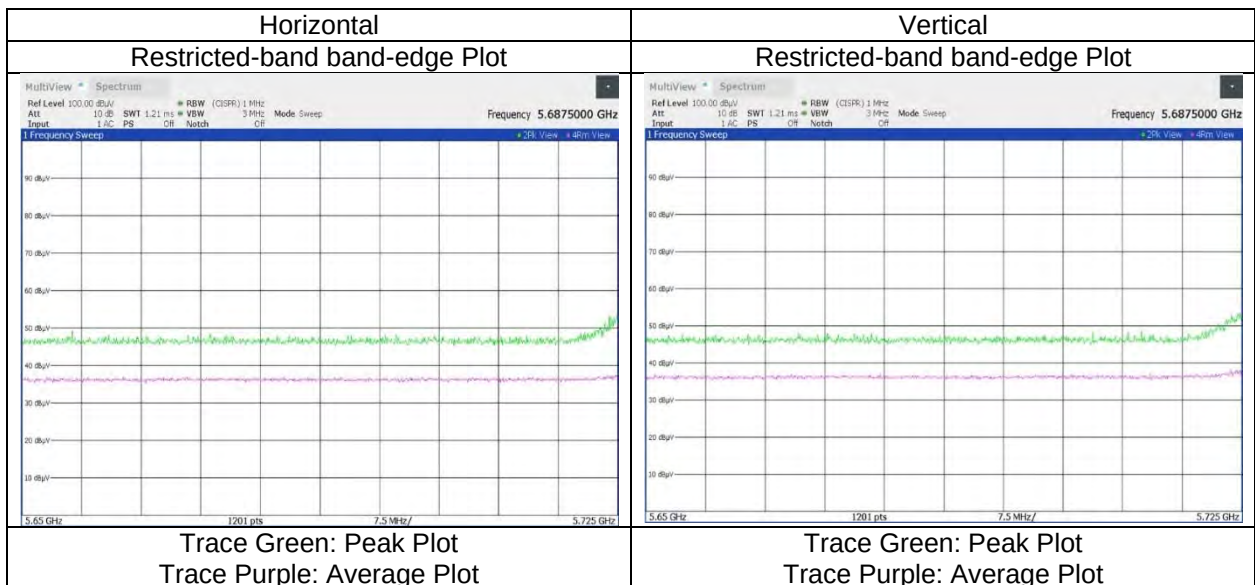

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 242-tone RU, RU Index 64, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	48.20	33.70	-26.56	-	-	2.22	57.56	-37.67	27.0	64.6	368	351	-	
Hori.	5855.000	PK	48.51	33.71	-26.56	-	-	2.22	57.88	-37.35	15.6	52.9	368	351	-	
Hori.	5875.000	PK	48.35	33.73	-26.54	-	-	2.22	57.76	-37.47	10.0	47.4	368	351	-	
Hori.	5925.000	PK	48.34	33.85	-26.53	-	-	2.22	57.88	-37.35	-27.0	10.3	368	351	-	
Vert.	5850.000	PK	48.45	33.70	-26.56	-	-	2.22	57.81	-37.42	27.0	64.4	352	1	-	
Vert.	5855.000	PK	48.61	33.71	-26.56	-	-	2.22	57.98	-37.25	15.6	52.8	352	1	-	
Vert.	5875.000	PK	48.28	33.73	-26.54	-	-	2.22	57.69	-37.54	10.0	47.5	352	1	-	
Vert.	5925.000	PK	48.44	33.85	-26.53	-	-	2.22	57.98	-37.25	-27.0	10.2	352	1	-	


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

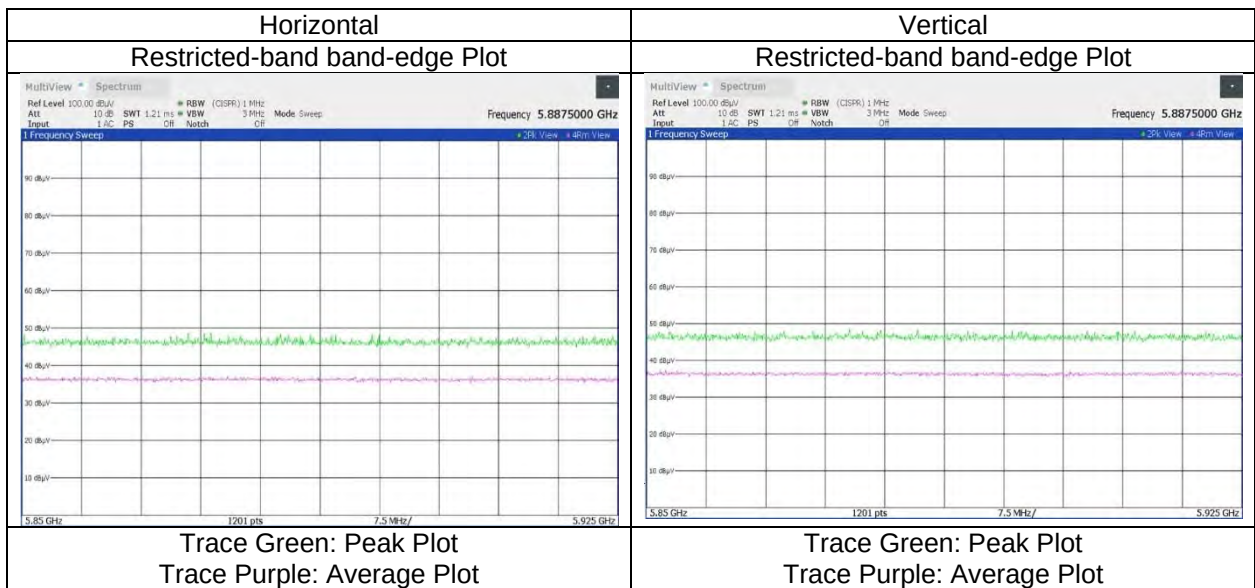

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 65, MIMO 5210 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.00	32.61	-27.03	-	2.22	56.80	73.9	17.1	356	2	-
Hori.	5150.000	AV	37.68	32.61	-27.03	-	2.22	45.48	53.9	8.4	356	2	-
Vert.	5150.000	PK	48.88	32.61	-27.03	-	2.22	56.68	73.9	17.2	225	352	-
Vert.	5150.000	AV	37.58	32.61	-27.03	-	2.22	45.38	53.9	8.5	225	352	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

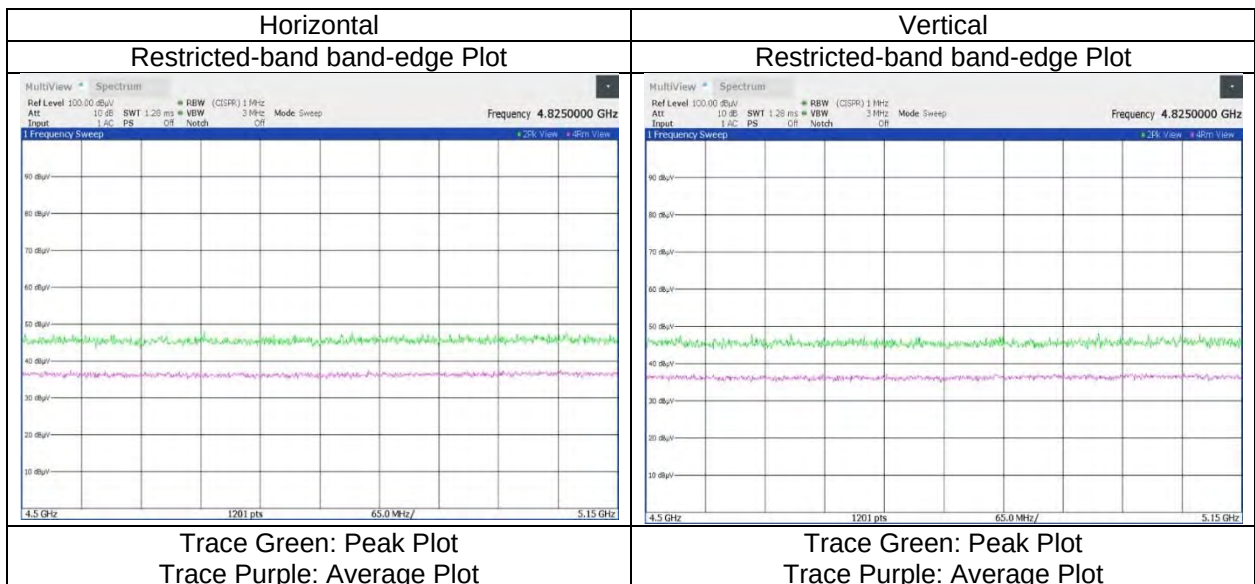

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 66, MIMO 5290 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.23	32.52	-26.78	-	2.22	57.19	73.9	16.7	385	350	-
Hori.	5350.000	AV	37.50	32.52	-26.78	-	2.22	45.46	53.9	8.4	385	350	-
Vert.	5350.000	PK	49.12	32.52	-26.78	-	2.22	57.08	73.9	16.8	187	341	-
Vert.	5350.000	AV	37.48	32.52	-26.78	-	2.22	45.44	53.9	8.4	187	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

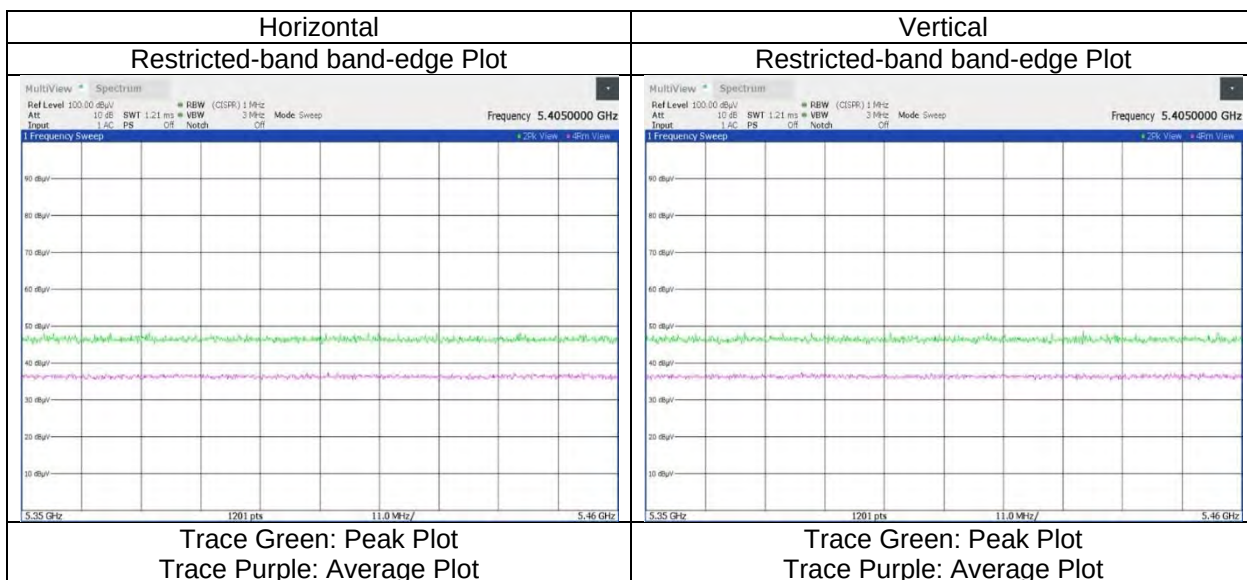

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 65, MIMO 5530 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	36.97	32.98	-26.65	-	2.22	45.52	53.9	8.3	397	359	-
Vert.	5460.000	AV	36.99	32.98	-26.65	-	2.22	45.54	53.9	8.3	295	5	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.96	32.98	-26.65	-	-	2.22	56.51	-38.72	-27.0	11.7	397	359	-
Hori.	5470.000	PK	48.11	33.04	-26.64	-	-	2.22	56.73	-38.50	-27.0	11.5	397	359	-
Vert.	5460.000	PK	47.88	32.98	-26.65	-	-	2.22	56.43	-38.80	-27.0	11.8	295	5	-
Vert.	5470.000	PK	47.98	33.04	-26.64	-	-	2.22	56.60	-38.63	-27.0	11.6	295	5	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(\text{Result [dBuV/m]} / 20)} * 10^{(-6)} * \text{Distance : 3 [m]})^2 / 30 * 10^{(-3)})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87\text{ [m]} / 3.0\text{ [m]}) = 2.22\text{ [dB]}$

10 GHz to 40 GHz : $20\log(1.00\text{ [m]} / 3.0\text{ [m]}) = -9.54\text{ [dB]}$

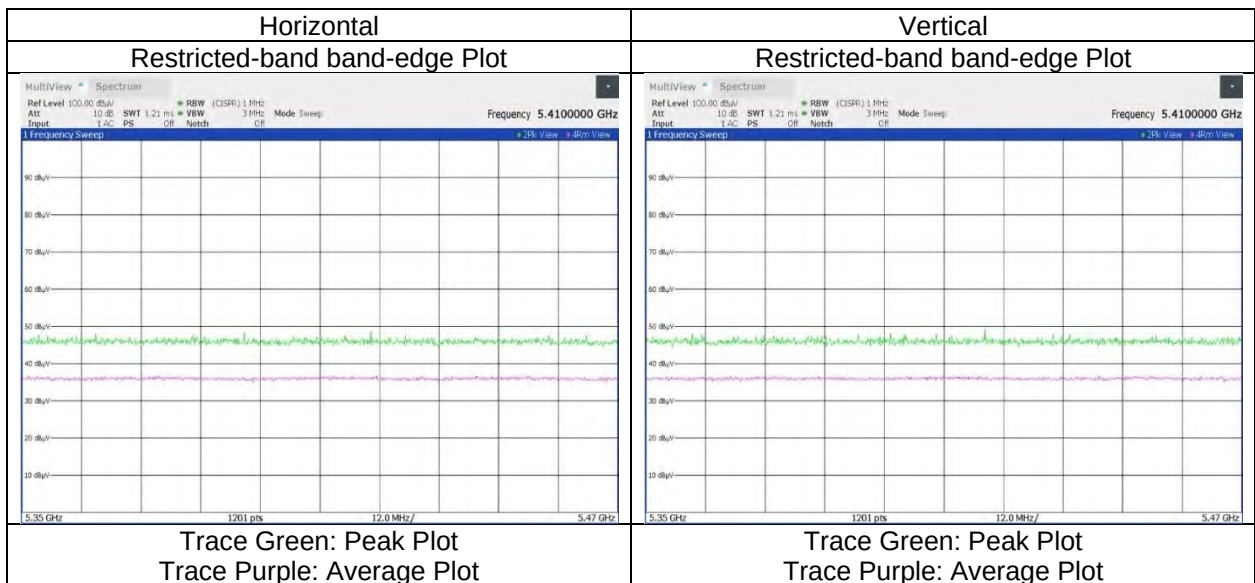

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 66, MIMO 5610 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.11	33.67	-26.57	-	-	2.22	57.43	-37.80	-27.0	10.8	385	350	-
Vert.	5725.000	PK	48.16	33.67	-26.57	-	-	2.22	57.48	-37.75	-27.0	10.7	207	20	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

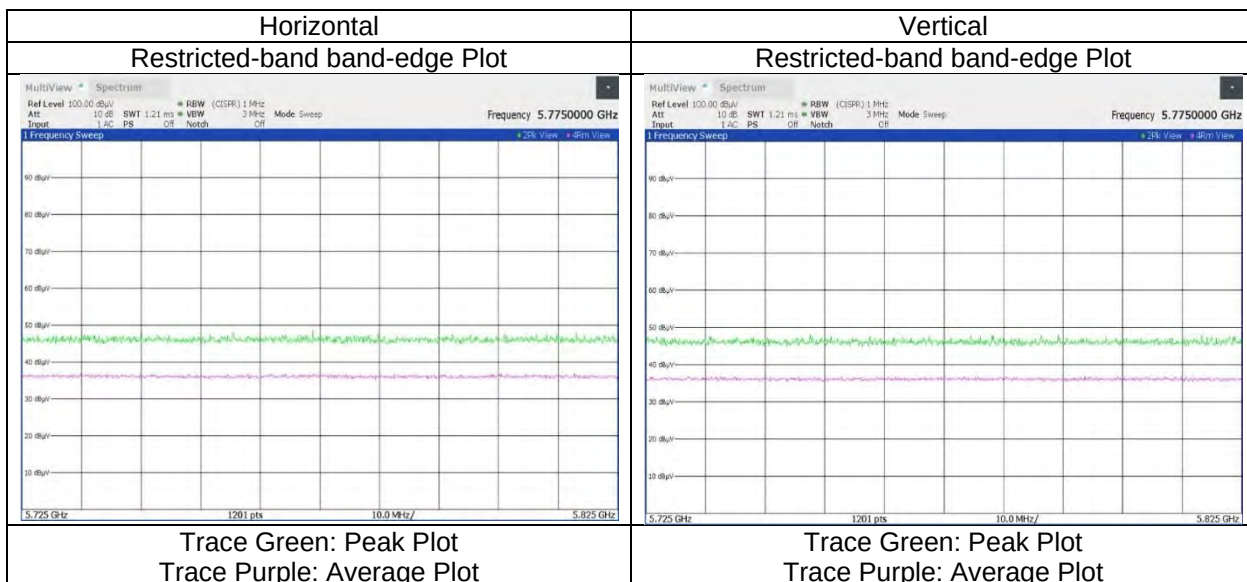

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 65, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5650.000	PK	48.27	33.66	-26.58	-	-	2.22	57.57	-37.66	-27.0	10.6	377	2	-	-
Hori.	5700.000	PK	48.39	33.69	-26.58	-	-	2.22	57.72	-37.51	10.0	47.5	377	2	-	-
Hori.	5720.000	PK	49.08	33.66	-26.58	-	-	2.22	58.38	-36.85	15.6	52.4	377	2	-	-
Hori.	5725.000	PK	51.65	33.67	-26.57	-	-	2.22	60.97	-34.26	27.0	61.2	377	2	-	-
Vert.	5650.000	PK	48.30	33.66	-26.58	-	-	2.22	57.60	-37.63	-27.0	10.6	313	14	-	-
Vert.	5700.000	PK	48.24	33.69	-26.58	-	-	2.22	57.57	-37.66	10.0	47.6	313	14	-	-
Vert.	5720.000	PK	49.42	33.66	-26.58	-	-	2.22	58.72	-36.51	15.6	52.1	313	14	-	-
Vert.	5725.000	PK	53.08	33.67	-26.57	-	-	2.22	62.40	-32.83	27.0	59.8	313	14	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

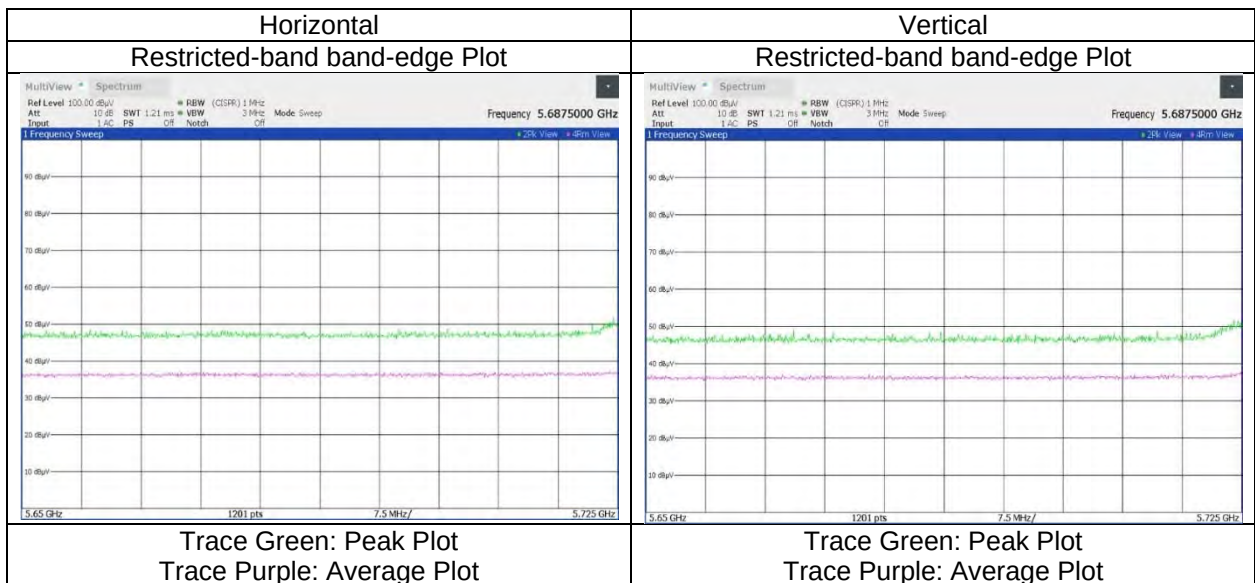

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 484-tone RU, RU Index 66, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5850.000	PK	48.59	33.70	-26.56	-	-	2.22	57.95	-37.28	27.0	64.2	368	351	-	-
Hori.	5855.000	PK	48.31	33.71	-26.56	-	-	2.22	57.68	-37.55	15.6	53.1	368	351	-	-
Hori.	5875.000	PK	48.47	33.73	-26.54	-	-	2.22	57.88	-37.35	10.0	47.3	368	351	-	-
Hori.	5925.000	PK	48.18	33.85	-26.53	-	-	2.22	57.72	-37.51	-27.0	10.5	368	351	-	-
Vert.	5850.000	PK	48.10	33.70	-26.56	-	-	2.22	57.46	-37.77	27.0	64.7	358	2	-	-
Vert.	5855.000	PK	48.26	33.71	-26.56	-	-	2.22	57.63	-37.60	15.6	53.2	358	2	-	-
Vert.	5875.000	PK	48.53	33.73	-26.54	-	-	2.22	57.94	-37.29	10.0	47.2	358	2	-	-
Vert.	5925.000	PK	48.26	33.85	-26.53	-	-	2.22	57.80	-37.43	-27.0	10.4	358	2	-	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

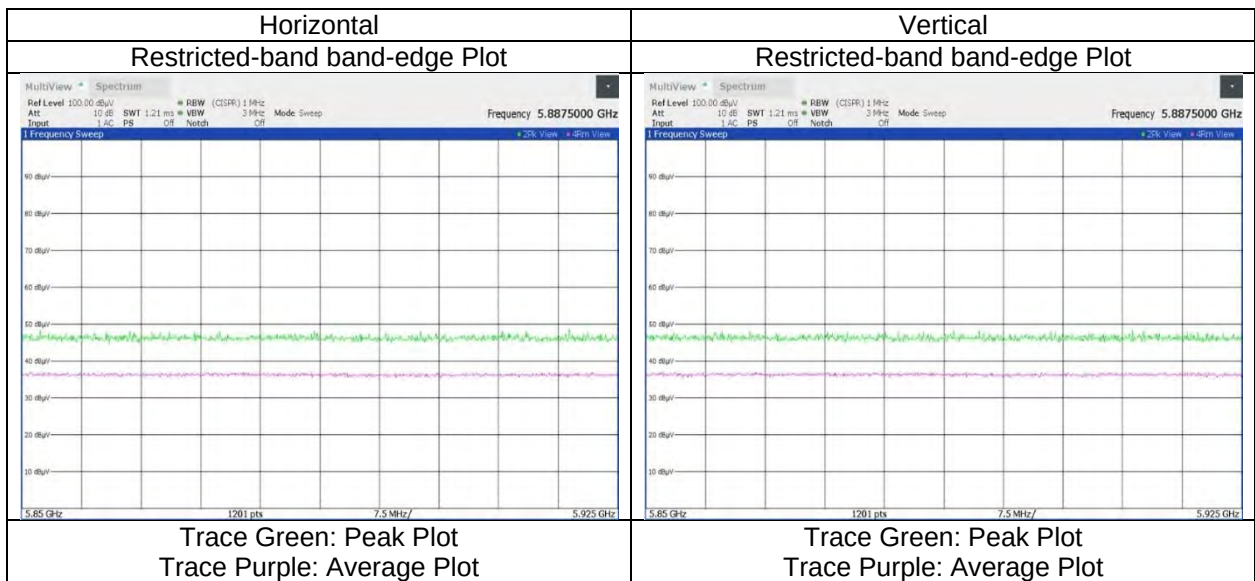

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5210 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.15	32.61	-27.03	-	2.22	56.95	73.9	16.9	386	4	-
Hori.	5150.000	AV	37.63	32.61	-27.03	-	2.22	45.43	53.9	8.4	386	4	-
Vert.	5150.000	PK	48.83	32.61	-27.03	-	2.22	56.63	73.9	17.2	204	351	-
Vert.	5150.000	AV	37.55	32.61	-27.03	-	2.22	45.35	53.9	8.5	204	351	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5290 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 12, 2026	WAC2	21 deg. C	28 % RH	Toshinori Yamada	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.03	32.52	-26.78	-	2.22	56.99	73.9	16.9	388	350	-
Hori.	5350.000	AV	37.57	32.52	-26.78	-	2.22	45.53	53.9	8.3	388	350	-
Vert.	5350.000	PK	48.96	32.52	-26.78	-	2.22	56.92	73.9	16.9	219	341	-
Vert.	5350.000	AV	37.50	32.52	-26.78	-	2.22	45.46	53.9	8.4	219	341	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

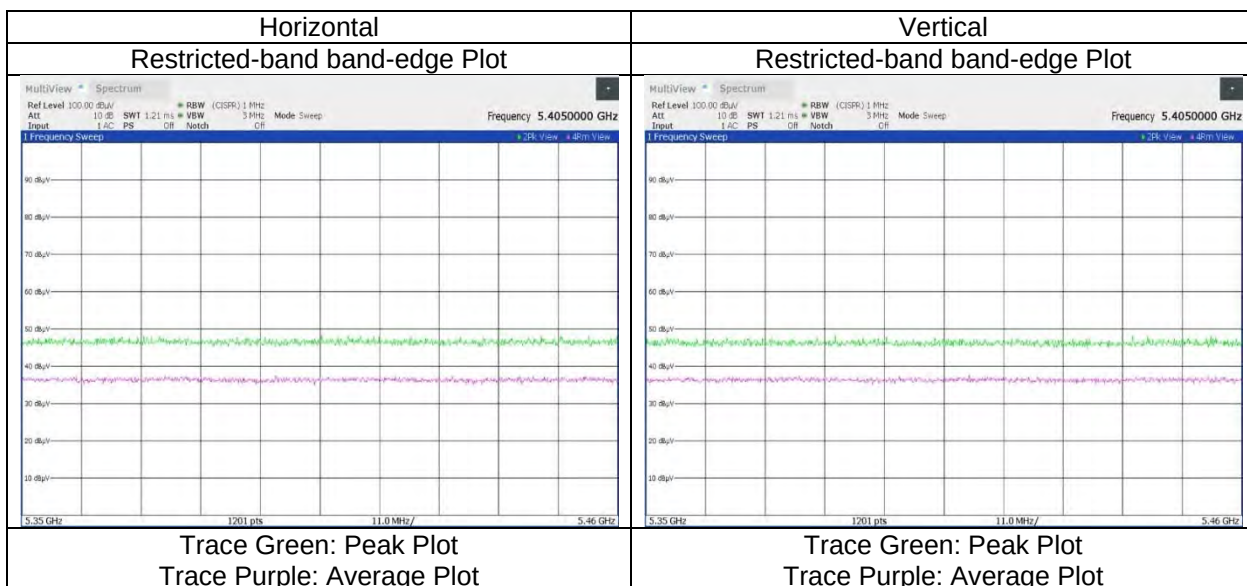

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5530 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	AV	37.02	32.98	-26.65	-	2.22	45.57	53.9	8.3	397	359	-
Vert.	5460.000	AV	36.93	32.98	-26.65	-	2.22	45.48	53.9	8.4	295	5	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Duty Fac.	Distance Fac.	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	5460.000	PK	47.95	32.98	-26.65	-	-	2.22	56.50	-38.73	-27.0	11.7	397	359	-
Hori.	5470.000	PK	48.24	33.04	-26.64	-	-	2.22	56.86	-38.37	-27.0	11.3	397	359	-
Vert.	5460.000	PK	47.97	32.98	-26.65	-	-	2.22	56.52	-38.71	-27.0	11.7	295	5	-
Vert.	5470.000	PK	47.90	33.04	-26.64	-	-	2.22	56.52	-38.71	-27.0	11.7	295	5	-


Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = $10 * \text{LOG}((10^{(Result [dBuV/m] / 20)} * 10^{(-6)} * Distance : 3 [m])^2 / 30 * 10^{-3})$

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.87[m] / 3.0[m]) = 2.22 [dB]$

10 GHz to 40 GHz : $20\log(1.00[m] / 3.0[m]) = -9.54 [dB]$

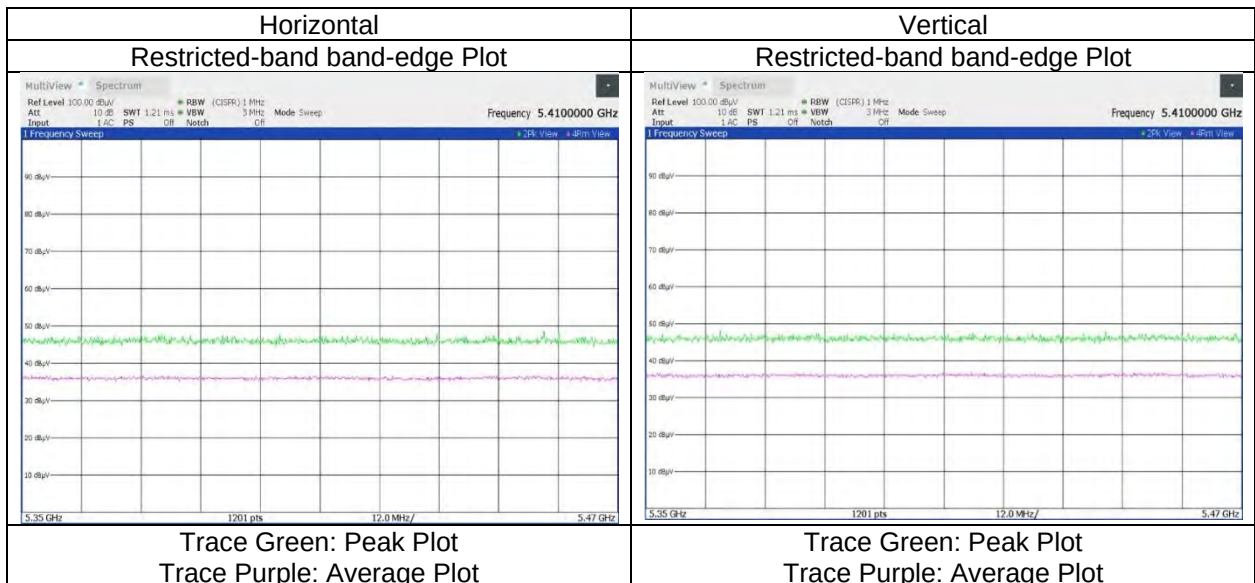

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5610 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.15	33.67	-26.57	-	-	2.22	57.47	-37.76	-27.0	10.7	385	350	-
Vert.	5725.000	PK	48.12	33.67	-26.57	-	-	2.22	57.44	-37.79	-27.0	10.7	207	21	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]



* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)																
Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Fac. [dB]	Distance Fac. [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark	
Hori.	5650.000	PK	48.30	33.66	-26.58	-	-	2.22	57.60	-37.63	-27.0	10.6	367	356	-	-
Hori.	5700.000	PK	48.47	33.69	-26.58	-	-	2.22	57.80	-37.43	10.0	47.4	367	356	-	-
Hori.	5720.000	PK	48.90	33.66	-26.58	-	-	2.22	58.20	-37.03	15.6	52.6	367	356	-	-
Hori.	5725.000	PK	50.91	33.67	-26.57	-	-	2.22	60.23	-35.00	27.0	62.0	367	356	-	-
Hori.	5850.000	PK	48.25	33.70	-26.56	-	-	2.22	57.61	-37.62	27.0	64.6	367	356	-	-
Hori.	5855.000	PK	48.57	33.71	-26.56	-	-	2.22	57.94	-37.29	15.6	52.8	367	356	-	-
Hori.	5875.000	PK	48.45	33.73	-26.54	-	-	2.22	57.86	-37.37	10.0	47.3	367	356	-	-
Hori.	5925.000	PK	48.44	33.85	-26.53	-	-	2.22	57.98	-37.25	-27.0	10.2	367	356	-	-
Vert.	5650.000	PK	48.31	33.66	-26.58	-	-	2.22	57.61	-37.62	-27.0	10.6	349	7	-	-
Vert.	5700.000	PK	48.53	33.69	-26.58	-	-	2.22	57.86	-37.37	10.0	47.3	349	7	-	-
Vert.	5720.000	PK	48.91	33.66	-26.58	-	-	2.22	58.21	-37.02	15.6	52.6	349	7	-	-
Vert.	5725.000	PK	52.43	33.67	-26.57	-	-	2.22	61.75	-33.48	27.0	60.4	349	7	-	-
Vert.	5850.000	PK	48.40	33.70	-26.56	-	-	2.22	57.76	-37.47	27.0	64.4	349	7	-	-
Vert.	5855.000	PK	48.30	33.71	-26.56	-	-	2.22	57.67	-37.56	15.6	53.1	349	7	-	-
Vert.	5875.000	PK	48.34	33.73	-26.54	-	-	2.22	57.75	-37.48	10.0	47.4	349	7	-	-
Vert.	5925.000	PK	48.52	33.85	-26.53	-	-	2.22	58.06	-37.17	-27.0	10.1	349	7	-	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).



Distance Fac. : 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA), 996-tone RU, RU Index 67, MIMO 5775 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 11, 2026	WAC2	25 deg. C	25 % RH	Yosuke Murakami	1 GHz to 6.4 GHz

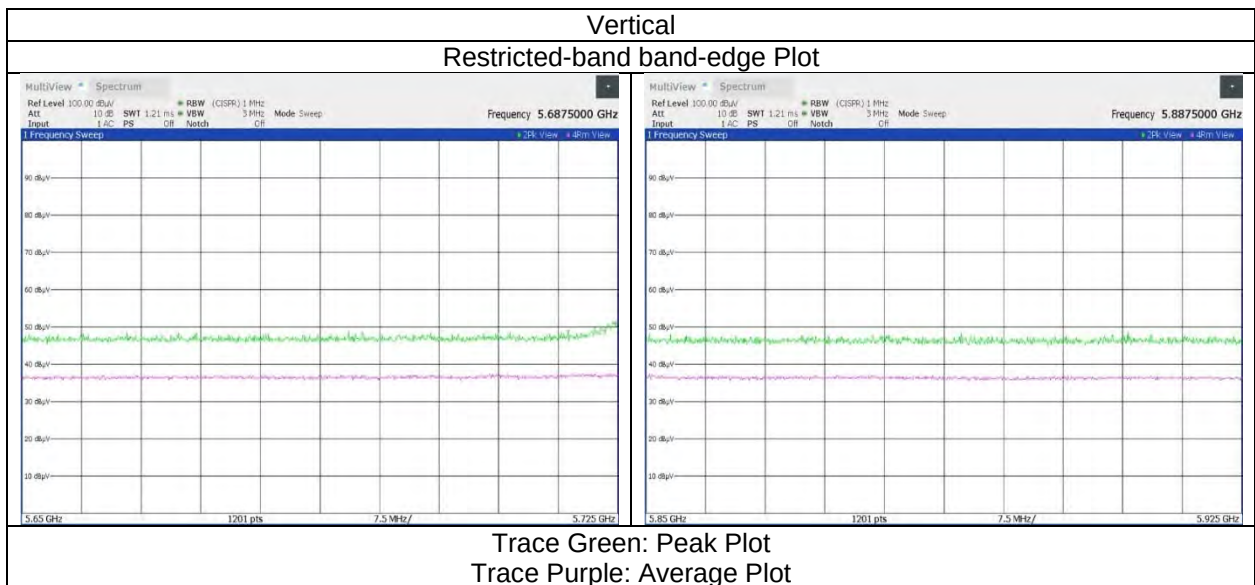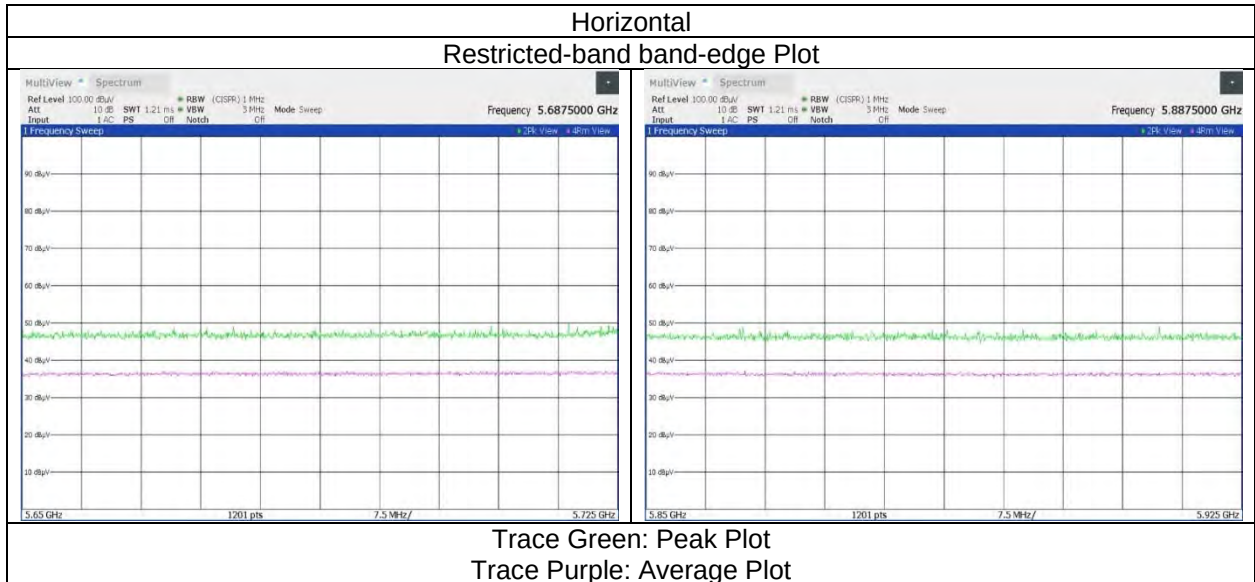

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.


Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

(Plot data, Worst case mode for Maximum Conducted Output Power)

Mode	Tx 11ac-20, MIMO 5600 MHz
------	---------------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 01, 2026	WAC2	22 deg. C	64 % RH	Makoto Hosaka	Below 1 GHz
March 06, 2026	WAC2	22 deg. C	28 % RH	Miku Ikudome	1 GHz to 6.4 GHz
March 16, 2026	WAC2	22 deg. C	46 % RH	Naoki Saga	6.4 GHz to 10 GHz
March 18, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	10 GHz to 18 GHz
March 23, 2026	WAC2	23 deg. C	36 % RH	Hiromasa Sato	18 GHz to 26.5 GHz
March 26, 2026	WAC2	18 deg. C	55 % RH	Takayuki Kobayashi	26.5 GHz to 40 GHz

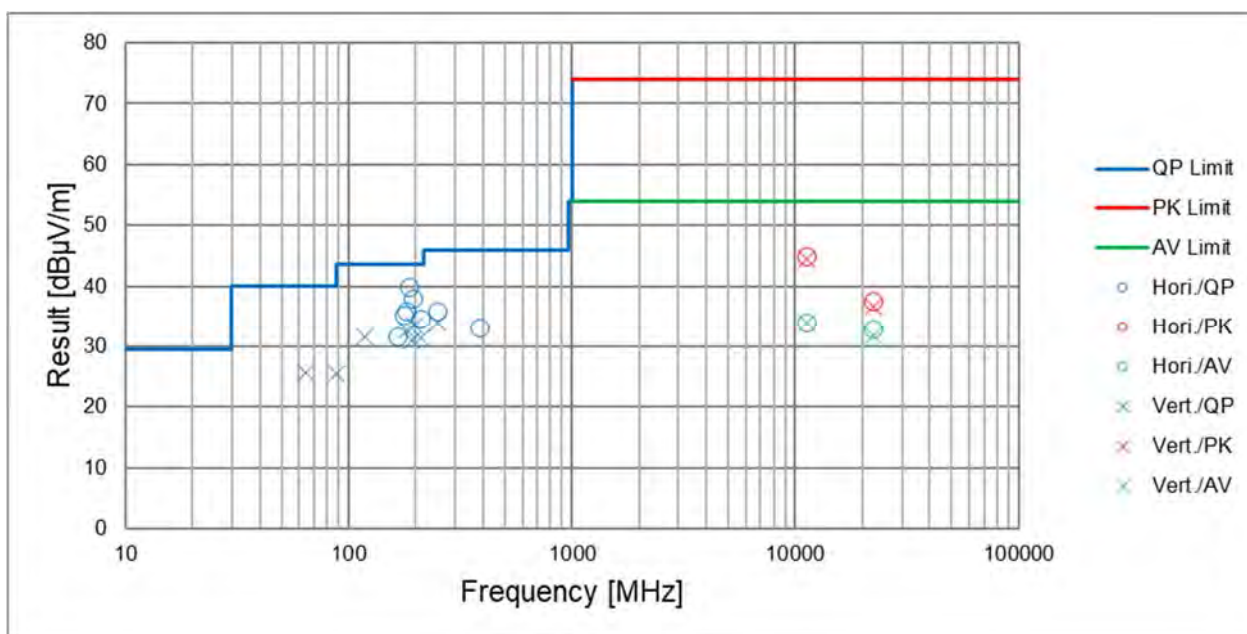

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80, MIMO 5210 MHz with BT 3DH5 Hopping
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 31, 2026	WAC2	22 deg. C	28 % RH	Miku Ikudome	1 GHz to 10 GHz
March 28, 2026	WAC2	22 deg. C	46 % RH	Naoki Saga	10 GHz to 18 GHz
March 27, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	18 GHz to 40 GHz
April 01, 2026	WAC2	23 deg. C	36 % RH	Hiromasa Sato	Below 1 GHz

(below 1 GHz and above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	Fac. [dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	165.926	QP	44.95	12.43	7.46	33.16	0.00	31.68	43.5	11.8	199	94	-
Hori.	177.129	QP	47.94	13.10	7.47	33.14	0.00	35.37	43.5	8.1	186	65	-
Hori.	181.145	QP	48.41	13.38	7.45	33.13	0.00	36.11	43.5	7.3	189	57	-
Hori.	188.138	QP	51.65	13.83	7.38	33.12	0.00	39.74	43.5	3.7	186	59	-
Hori.	195.961	QP	49.51	14.29	7.29	33.11	0.00	37.98	43.5	5.5	174	43	-
Hori.	209.713	QP	49.68	11.57	7.39	33.07	0.00	35.57	43.5	7.9	174	104	-
Hori.	251.516	QP	48.51	12.10	7.54	32.95	0.00	35.20	46.0	10.8	144	186	-
Hori.	386.768	QP	42.43	15.48	7.96	32.59	0.00	33.28	46.0	12.7	100	3	-
Hori.	5150.000	PK	49.21	32.61	-27.03	-	2.22	57.01	73.9	16.8	383	1	-
Hori.	15630.000	PK	47.51	39.66	-26.58	-	-9.54	51.05	73.9	22.8	150	0	Floor Noise
Hori.	20840.000	PK	52.01	33.14	12.81	51.25	-9.54	37.17	73.9	36.7	124	244	-
Hori.	5150.000	AV	38.02	32.61	-27.03	-	2.22	45.82	53.9	8.0	383	1	-
Hori.	15630.000	AV	36.50	39.66	-26.58	-	-9.54	40.04	53.9	13.8	150	0	Floor Noise
Hori.	20840.000	AV	47.19	33.14	12.81	51.25	-9.54	32.35	53.9	21.5	124	244	-
Vert.	63.968	QP	43.64	9.47	6.51	33.18	0.00	26.44	40.0	13.5	100	218	-
Vert.	118.568	QP	47.34	10.64	6.94	33.22	0.00	31.70	43.5	11.8	100	241	-
Vert.	182.874	QP	44.76	13.49	7.43	33.13	0.00	32.55	43.5	10.9	100	100	-
Vert.	197.790	QP	44.35	14.39	7.28	33.10	0.00	32.92	43.5	10.5	100	0	-
Vert.	209.704	QP	45.11	11.57	7.39	33.07	0.00	31.00	43.5	12.5	106	324	-
Vert.	251.463	QP	47.46	12.10	7.54	32.95	0.00	34.15	46.0	11.8	100	153	-
Vert.	5150.000	PK	49.33	32.61	-27.03	-	2.22	57.13	73.9	16.7	240	353	-
Vert.	15630.000	PK	47.44	39.66	-26.58	-	-9.54	50.98	73.9	22.9	150	0	Floor Noise
Vert.	20840.000	PK	51.03	33.14	12.81	51.25	-9.54	36.19	73.9	37.7	168	165	-
Vert.	5150.000	AV	37.89	32.61	-27.03	-	2.22	45.69	53.9	8.2	240	353	-
Vert.	15630.000	AV	36.55	39.66	-26.58	-	-9.54	40.09	53.9	13.8	150	0	Floor Noise
Vert.	20840.000	AV	46.27	33.14	12.81	51.25	-9.54	31.43	53.9	22.4	168	165	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Duty	Distance	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	Fac. [dB]	Fac. [dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	6946.672	PK	50.25	35.97	-34.74	-	-	2.22	53.70	-41.53	-27.0	14.5	393	335	-
Hori.	10420.000	PK	47.30	36.51	-29.55	-	-	-9.54	44.72	-50.51	-27.0	23.5	150	0	Floor Noise
Vert.	6946.672	PK	51.82	35.97	-34.74	-	-	2.22	55.27	-39.96	-27.0	12.9	385	358	-
Vert.	10420.000	PK	47.38	36.51	-29.55	-	-	-9.54	44.80	-50.43	-27.0	23.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).


Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ax-80, MIMO 5210 MHz with BT 3DH5 Hopping				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 31, 2026	WAC2	22 deg. C	28 % RH	Miku Ikudome	1 GHz to 10 GHz

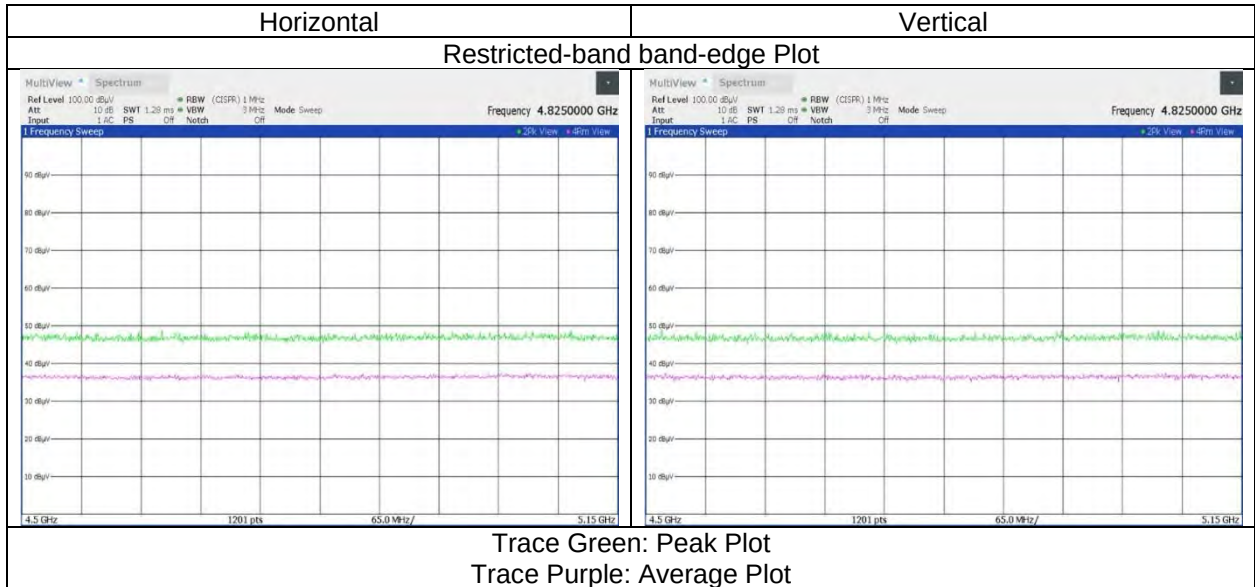

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80, MIMO 5210 MHz with 11g 2462 MHz
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 31, 2026	WAC2	22 deg. C	28 % RH	Miku Ikudome	1 GHz to 10 GHz
March 28, 2026	WAC2	22 deg. C	46 % RH	Naoki Saga	10 GHz to 18 GHz
March 27, 2026	WAC2	21 deg. C	42 % RH	Shiro Kobayashi	18 GHz to 40 GHz
April 01, 2026	WAC2	23 deg. C	36 % RH	Hiromasa Sato	Below 1 GHz

(below 1 GHz and above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	Fac. [dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	165.990	QP	44.99	12.44	7.46	33.16	0.00	31.73	43.5	11.7	201	84	-
Hori.	177.139	QP	47.98	13.10	7.47	33.14	0.00	35.41	43.5	8.0	182	72	-
Hori.	181.276	QP	48.38	13.39	7.44	33.13	0.00	36.08	43.5	7.4	188	57	-
Hori.	187.938	QP	51.71	13.81	7.38	33.12	0.00	39.78	43.5	3.7	181	57	-
Hori.	195.937	QP	49.75	14.29	7.29	33.11	0.00	38.22	43.5	5.2	177	46	-
Hori.	209.737	QP	49.25	11.57	7.40	33.07	0.00	35.15	43.5	8.3	161	103	-
Hori.	251.505	QP	48.93	12.10	7.54	32.95	0.00	35.62	46.0	10.3	144	180	-
Hori.	386.772	QP	42.32	15.48	7.96	32.59	0.00	33.17	46.0	12.8	100	6	-
Hori.	5150.000	PK	48.47	32.61	-27.03	-	2.22	56.27	73.9	17.6	376	360	-
Hori.	15630.000	PK	47.55	39.66	-26.58	-	-9.54	51.09	73.9	22.8	150	0	Floor Noise
Hori.	20840.000	PK	49.86	33.14	12.81	51.25	-9.54	35.02	73.9	38.8	137	170	-
Hori.	5150.000	AV	38.04	32.61	-27.03	-	2.22	45.84	53.9	8.0	376	360	-
Hori.	15630.000	AV	36.51	39.66	-26.58	-	-9.54	40.05	53.9	13.8	150	0	Floor Noise
Hori.	20840.000	AV	44.41	33.14	12.81	51.25	-9.54	29.57	53.9	24.3	137	170	-
Vert.	64.001	QP	43.14	9.47	6.51	33.18	0.00	25.94	40.0	14.0	100	227	-
Vert.	118.247	QP	47.31	10.62	6.93	33.22	0.00	31.64	43.5	11.8	100	243	-
Vert.	182.635	QP	44.87	13.47	7.43	33.13	0.00	32.64	43.5	10.8	100	91	-
Vert.	197.775	QP	44.38	14.39	7.28	33.10	0.00	32.95	43.5	10.5	100	355	-
Vert.	209.592	QP	45.33	11.57	7.39	33.07	0.00	31.22	43.5	12.2	100	322	-
Vert.	251.520	QP	47.52	12.10	7.54	32.95	0.00	34.21	46.0	11.7	100	164	-
Vert.	5150.000	PK	49.16	32.61	-27.03	-	2.22	56.96	73.9	16.9	240	354	-
Vert.	15630.000	PK	47.42	39.66	-26.58	-	-9.54	50.96	73.9	22.9	150	0	Floor Noise
Vert.	20840.000	PK	50.47	33.14	12.81	51.25	-9.54	35.63	73.9	38.2	175	343	-
Vert.	5150.000	AV	37.93	32.61	-27.03	-	2.22	45.73	53.9	8.1	240	354	-
Vert.	15630.000	AV	36.57	39.66	-26.58	-	-9.54	40.11	53.9	13.7	150	0	Floor Noise
Vert.	20840.000	AV	46.15	33.14	12.81	51.25	-9.54	31.31	53.9	22.5	175	343	-

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant. Fac.	Loss	Gain	Duty	Distance	Result	Result (EIRP)	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	Fac. [dB]	Fac. [dB]	[dBuV/m]	[dBm]	[dBm]	[dB]	[cm]	[deg.]	
Hori.	6946.672	PK	49.69	35.97	-34.74	-	-	2.22	53.14	-42.09	-27.0	15.0	389	337	-
Hori.	10420.000	PK	47.38	36.51	-29.55	-	-	-9.54	44.80	-50.43	-27.0	23.4	150	0	Floor Noise
Vert.	6946.672	PK	51.16	35.97	-34.74	-	-	2.22	54.61	-40.62	-27.0	13.6	377	356	-
Vert.	10420.000	PK	47.31	36.51	-29.55	-	-	-9.54	44.73	-50.50	-27.0	23.5	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Duty Fac. + Distance Fac.

Result (EIRP) [dBm] = 10 * LOG ((10 ^ (Result [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).


Distance Fac.: 1 GHz to 10 GHz : 20log (3.87 [m] / 3.0 [m]) = 2.22 [dB]

10 GHz to 40 GHz : 20log (1.00 [m] / 3.0 [m]) = -9.54 [dB]

Radiated Spurious Emission

Mode	Tx 11ax-80, MIMO 5210 MHz with 11g 2462 MHz				
------	---	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 31, 2026	WAC2	22 deg. C	28 % RH	Miku Ikudome	1 GHz to 10 GHz

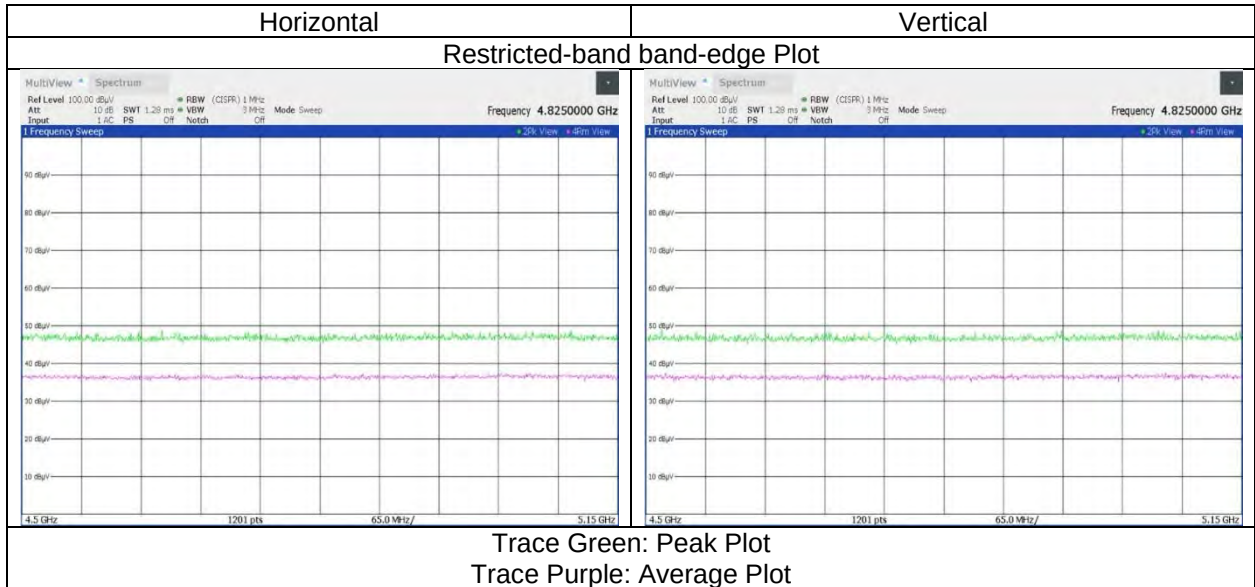

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.


Conducted Spurious Emission

Mode	Tx
------	----

Date	Test Site	Temperature	Humidity	Engineer
March 18, 2026	SR5	21 deg.C	40 %RH	Takayuki Kobayashi

Tx 11ac-20, MIMO, 5600 MHz

Antenna Port: ANT2

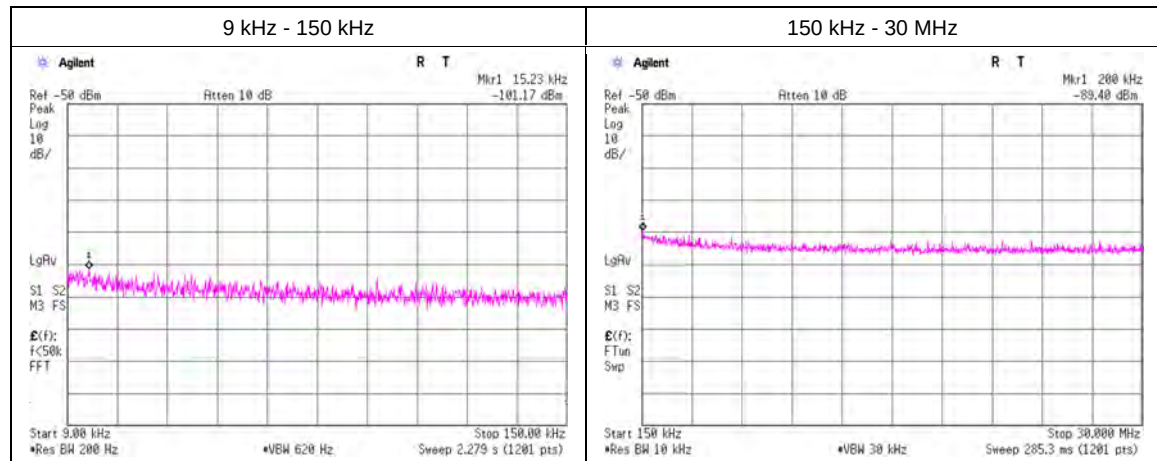

Freq. [kHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
15.230	-101.17	0.02	9.86	3.30	2.0	-85.0	300	6.0	-23.7	43.9	67.6	-
200.000	-89.40	0.02	9.86	3.30	2.0	-73.2	300	6.0	-12.0	21.5	33.5	-

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

APPENDIX 2: Test Instruments

Test Equipment [1/2]

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	204927	Attenuator	Weinschel Corp.	54A-10	109972	2026/02/02	12
AT	204928	Attenuator	Weinschel Corp.	54A-10	109973	2026/02/05	12
AT	245174	Coaxial Cable	Hayashi-Repic co., Ltd.	KMS020B-GL140sE-KMS020B-2.0m	49334-01-01	2026/02/02	12
AT	245175	Coaxial Cable	Hayashi-Repic co., Ltd.	KMS020B-GL140sE-KMS020B-2.0m	49334-01-02	2026/02/02	12
AT	146212	Digital Hitester	HIOKI E. E. CORPORATION	3805-50	80997828	2025/09/10	12
AT	145111	Digital Tester	SANWA	PC500	7019232	2025/09/11	12
AT	272616	Microwave cable	RS Pro	R-132G7210 100CO	-	2025/11/18	12
AT	272617	Microwave cable	RS Pro	R-132G7210 100CO	-	2025/11/18	12
AT	236796	Power Meter	Raditeq (Formerly DARE!! Instruments)	RPR3008W	RPR8W-2301014	2025/05/21	12
AT	236797	Power Meter	Raditeq (Formerly DARE!! Instruments)	RPR3008W	RPR8W-2301015	2025/05/21	12
AT	220801	measurement software	Raditeq (Formerly DARE!! Instruments)	RadiMation	Ver 2020.0.12	-	-
AT	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2025/08/07	12
AT	249684	Terminator	To-Conne Co., Ltd.	SMA50-SP 1W	-	-	-
AT	273121	Terminator	Amphenol RF	132360	-	-	-
AT	146362	Thermo-Hygrometer	CUSTOM. Inc	CTH-190	K-07	2025/08/15	12
AT	259713	Thermo-Hygrometer	CUSTOM. Inc	CTH-230	-	2026/04/01	12
AT	259714	Thermo-Hygrometer	CUSTOM. Inc	CTH-230	-	2026/04/02	12
RE	199783	Attenuator	JFW	50HF-006N	-	2025/06/04	12
RE	239787	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHBB 9124+BBA9106	01908	2025/08/14	12
RE	236711	Coaxial Cable	Hayashi-Repic co., Ltd.	KMS020B-GL140sE-KMS020B-7.0m	47256-03-02	2025/05/27	12
RE	236724	Coaxial Cable	Hayashi-Repic co., Ltd.	SF106(HUBER+SUHNER)/LMR400UF/GL310C x2	2000430/47753-2/47256-01-04/47256-01-02	2025/05/12	12
RE	239644	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	2306S022	2025/08/27	12
RE	239650	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	2001218/2	2025/08/27	12
RE	243210	Coaxial Cable	Hayashi-Repic co., Ltd.	SMS13-13A26-NFS13-1.0m	49190-01-02	2025/12/04	12
RE	243690	Coaxial Cable	Huber+Suhner	GL310C(Hayashi-Repic)/SF106/SF106	49373-01-02/2001168/2001161	2025/12/02	12
RE	264042	Coaxial Cable	Hayashi-Repic co., Ltd.	SMS13-13A26-SFS13-0.5m	53292-01-02	2025/06/20	12
RE	235640	DIGITAL MULTIMETER	HIOKI E. E. CORPORATION	DT4261	230313157	2025/05/22	12
RE	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	Ver 3.1.0612	-	-
RE	242062	Highpass Filter	Micro-Tronics	HPM50107	G119	2025/11/11	12
RE	236584	Horn Antenna	AINFO Inc.	LB-8180-NF	2030013000112	2025/04/25	12
RE	236586	Horn Antenna	AINFO Inc.	LB-42-25-C2-KF	2020087000114	2025/04/25	12
RE	236587	Horn Antenna	AINFO Inc.	LB-28-25-C2-KF	2020059000175	2025/04/01	12
RE	236687	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	00788	2025/04/25	12
RE	145528	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	195	2026/03/18	12
RE	236967	Pre Amplifier	TSJ (Techno Science Japan)	MLA-9K01-L01	23050010	2025/06/04	12
RE	237719	Pre Amplifier	TSJ (Techno Science Japan)	MLA-18265-J03	23060017	2025/06/19	12
RE	237721	Pre Amplifier	TSJ (Techno Science Japan)	MLA-2440-J03	23060019	2025/06/19	12

Test Equipment [2/2]

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	237786	RF RELAY MATRIX with preamplifier	TSJ (Techno Science Japan)	RFM-E221261R	07796	2025/11/23	12
RE	236615	Semi-Anechoic Chamber	TDK	SWAC-02(NSA)	2	2026/04/06	12
RE	236617	Semi-Anechoic Chamber	TDK	SWAC-02(SVSWR)	2	2025/06/13	12
RE	207281	Tape Measure	ASKUL	-	-	-	-
RE	235268	Test Receiver	Rohde & Schwarz	ESW44	103212	2025/12/19	12
RE	235738	Thermo-Hygrometer	CUSTOM. Inc	CTH-230	-	2026/04/02	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission