



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **GT-B3210**
FCC ID(Requested) : **A3LGTB3210**
Report No : **FG-219-R1**
Job No : **FG-219**
Date issued : **August 12, 2009**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

JH HAN – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Effective Radiated Power (E.R.P.)	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.).....	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph.....	21
6.7.3. GSM1900 Frequency Stability Table	23
6.7.4. GSM1900 Frequency Stability Graph.....	24
7. CONCLUSION.....	26
8. TEST PLOTS.....	27



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTB3210
- Model : GT-B3210
- Quantity : Quantity production is planned
- Emission Designators : 246KGXW(GSM850)
250KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.769 W ERP GSM850 (28.86 dBm)
0.713 W EIRP GSM1900 (28.53 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx Only
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : July 27-28, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-219-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-05-25
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

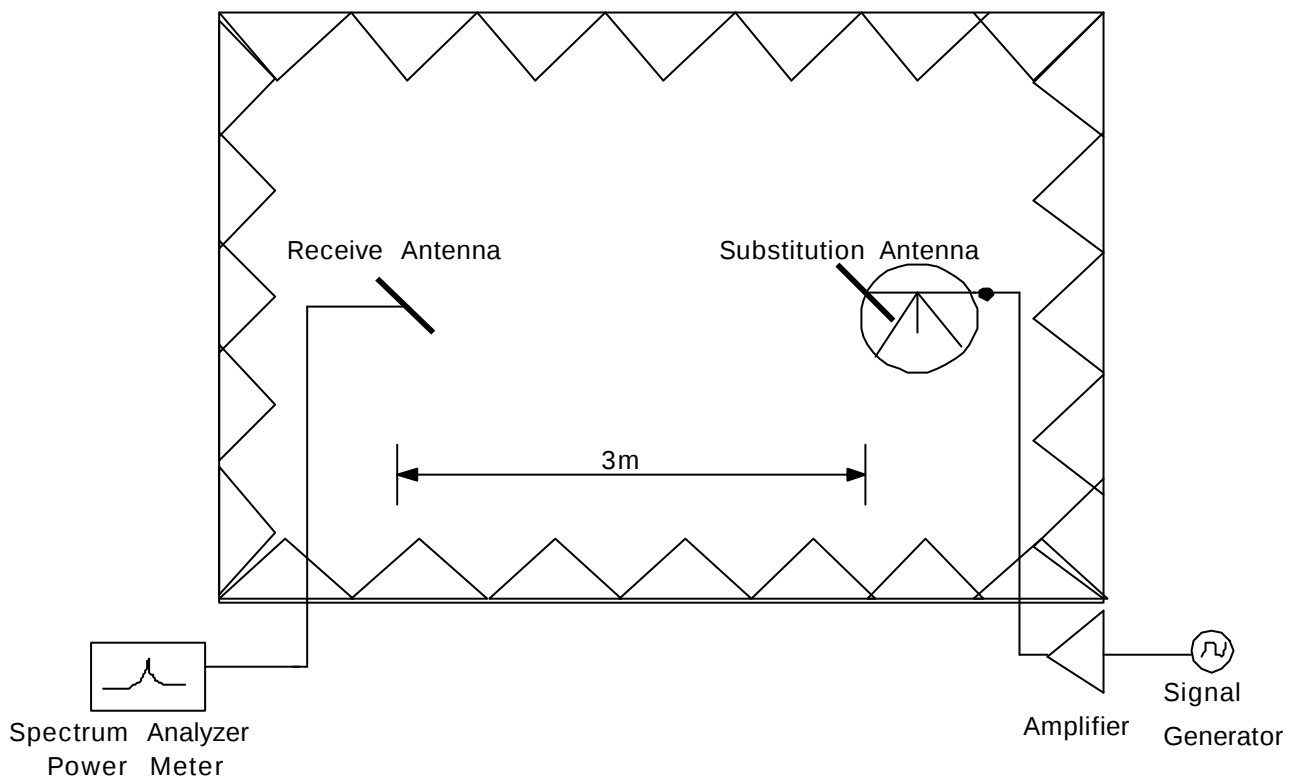


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

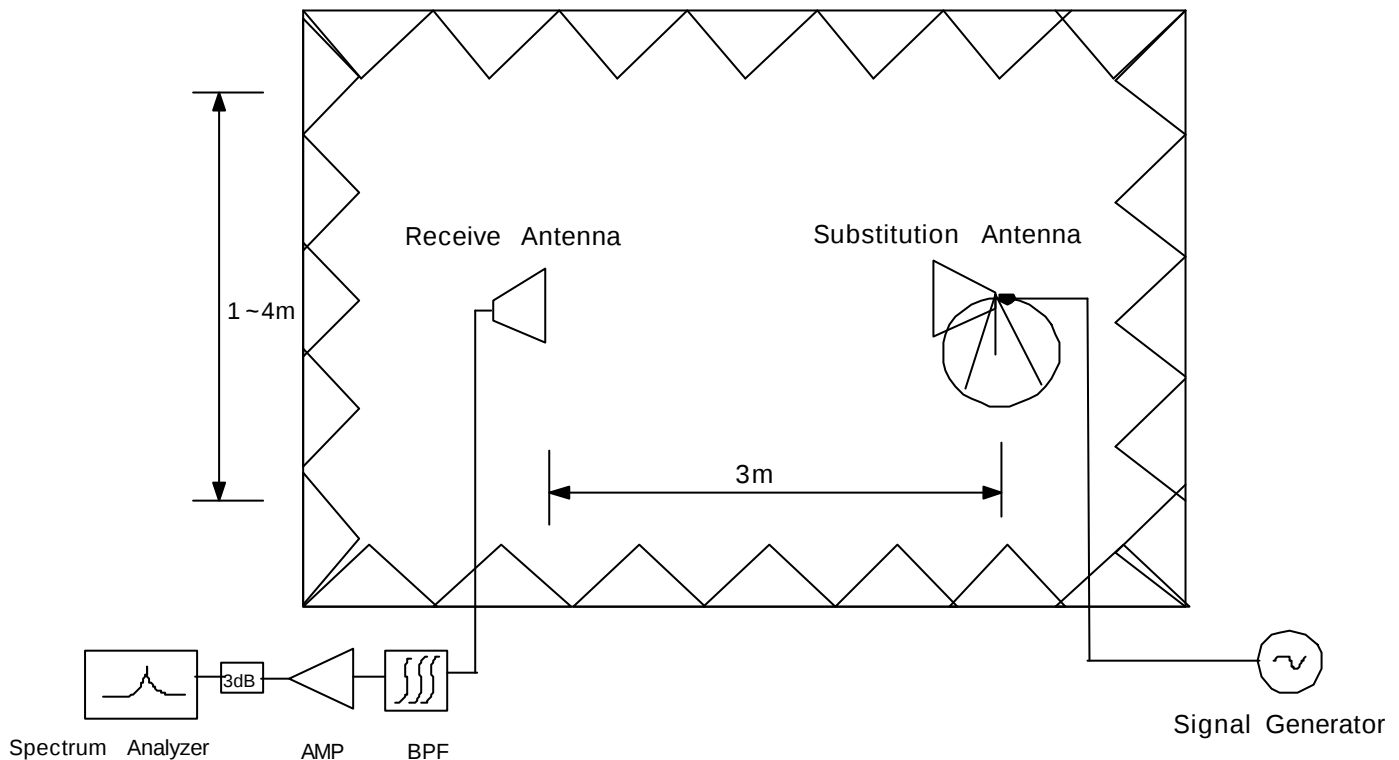


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.769 \text{ W}) = 41.86 \text{ dB}$$

$$28.86 \text{ dBm} - 41.86 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	28.00	H	-8.44	-0.67	-7.77
		V	-8.65	-0.67	-7.98
836.60	28.00	H	-9.90	-0.73	-9.17
		V	-9.42	-0.73	-8.69
848.80	29.00	H	-11.52	-0.79	-10.73
		V	-10.17	-0.79	-9.38

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-7.72	H	289/80	28.05	0.638	Standard
836.60	-9.25	H	292/100	27.92	0.619	Standard
848.80	-10.87	H	283/90	28.86	0.769	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	28.00	H	-10.74	9.70	-20.44
		V	-10.38	9.70	-20.08
1880.00	29.00	H	-10.11	9.70	-19.81
		V	-10.11	9.70	-19.81
1909.80	27.00	H	-12.11	9.70	-21.81
		V	-11.80	9.70	-21.50

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-20.90	H	29/180	27.54	0.568	Standard
1880.00	-20.28	V	44/100	28.53	0.713	Standard
1909.80	-21.49	H	335/10	27.32	0.540	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 28.86 dBm = 0.769 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 41.86 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-35.37	H	52.13
	3	2472.60	-55.94	H	68.24
	4	3296.80	-67.09	V	75.66
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-35.69	H	51.95
	3	2509.80	-54.35	H	66.66
	4	3346.40	-66.51	H	75.05
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-38.68	H	54.73
	3	2546.40	-54.16	H	66.58
	4	3395.20	-66.76	V	75.30
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 28.53 dBm = 0.713 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 41.53 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-66.87	H	71.46
	3	5550.60	-66.67	V	65.40
	4	7400.80	-67.58	H	61.78
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-67.36	H	71.81
	3	5640.00	-67.18	H	65.72
	4	7520.00	-68.24	V	62.71
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-66.50	V	69.35
	3	5729.40	-66.75	H	64.80
	4	7639.20	-68.60	V	62.69
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 07. 28

Test Engineer : JH HAN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= ERP+2.14 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-35.37	-35.69	52.13	52.59
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-55.94	-57.84	68.24	70.39
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-67.38	-67.09	76.42	75.66
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-35.69	-39.47	51.95	54.84
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-54.35	-60.23	66.66	72.59
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-66.51	-66.95	75.05	75.35
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-38.68	-39.85	54.73	56.10
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-54.16	-59.60	66.58	70.66
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-67.55	-66.76	76.38	75.30
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 07. 28

Test Engineer : JH HAN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-66.87	-67.97	71.46	72.93
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-67.20	-66.67	66.05	65.40
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-67.58	-68.84	61.78	63.41
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-67.36	-67.41	71.81	71.89
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-67.18	-67.27	65.98	65.72
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-68.30	-68.24	62.71	62.82
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-67.45	-66.50	70.96	69.35
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-66.75	-67.76	64.80	65.80
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-68.85	-68.60	63.09	62.69
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-4.50	836,599,996	-0.000001	-0.005
100%		-30	47.00	836,600,047	0.000006	0.056
100%		-20	-24.60	836,599,975	-0.000003	-0.029
100%		-10	29.30	836,600,029	0.000004	0.035
100%		0	-43.40	836,599,957	-0.000005	-0.052
100%		+10	-28.70	836,599,971	-0.000003	-0.034
100%		+20	-4.50	836,599,996	-0.000001	-0.005
100%		+30	12.80	836,600,013	0.000002	0.015
100%		+40	5.90	836,600,006	0.000001	0.007
100%		+50	-46.50	836,599,954	-0.000006	-0.056
100%		+60	-29.70	836,599,970	-0.000004	-0.036
85%	3.35	+20	10.70	836,600,011	0.000001	0.013
115%	4.26	+20	5.90	836,600,006	0.000001	0.007
Batt.Endpoint	3.35	+20	10.70	836,600,011	0.000001	0.013


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

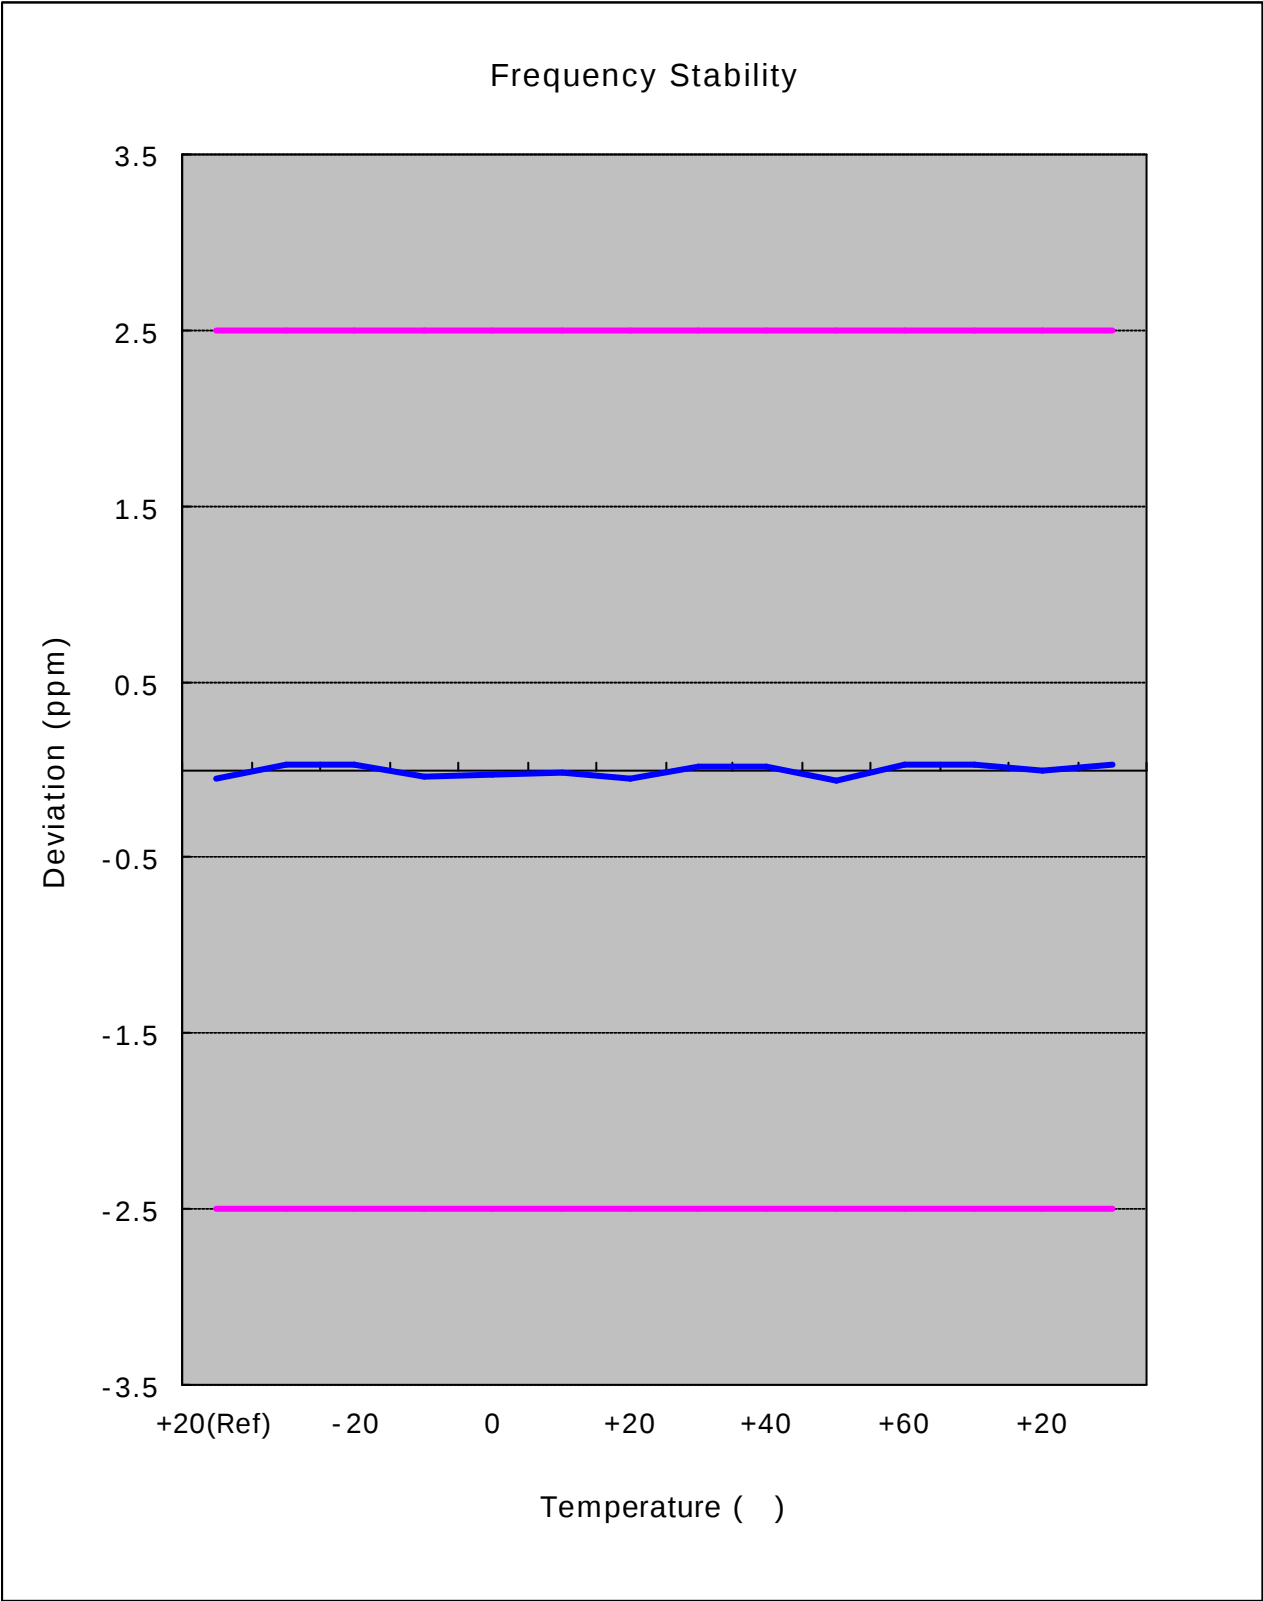

Zoom IN

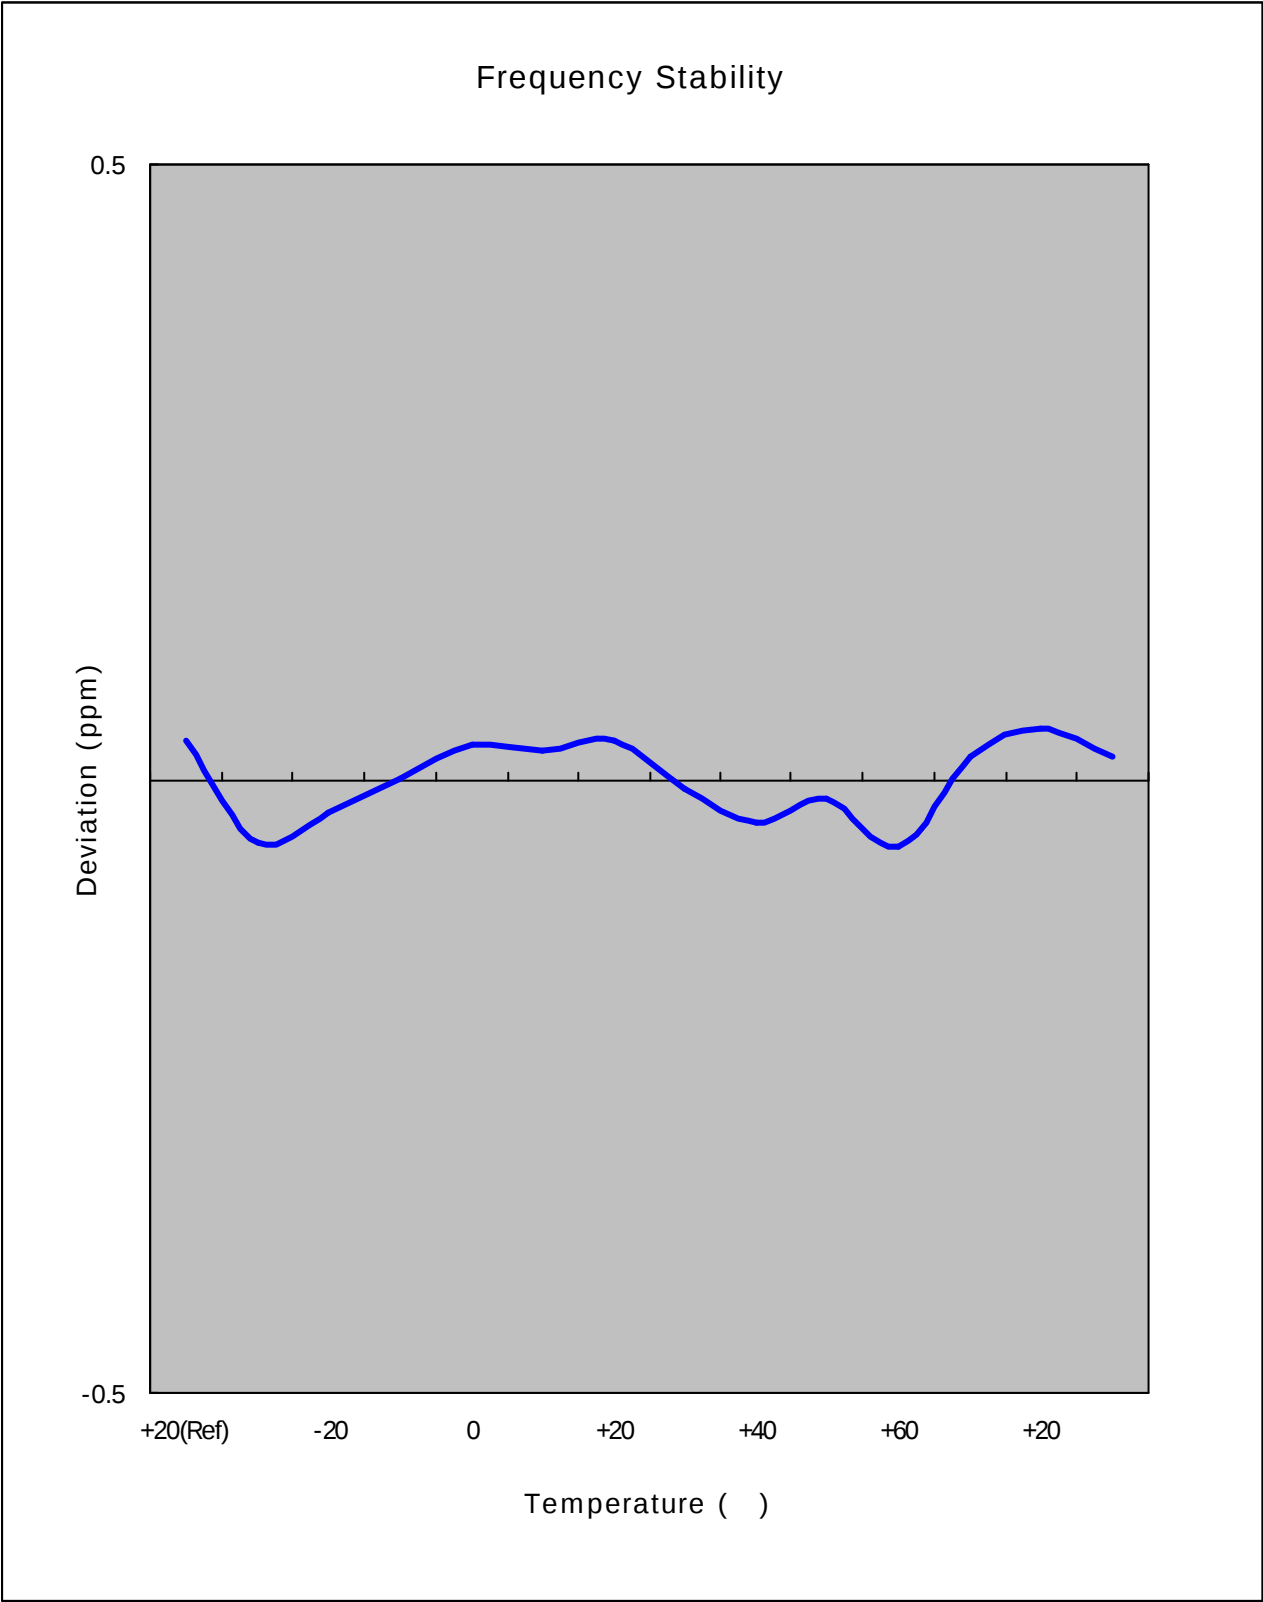

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-27.00	1,879,999,973	-0.000001	-0.014
100%		-30	41.40	1,880,000,041	0.000002	0.022
100%		-20	-20.70	1,879,999,979	-0.000001	-0.011
100%		-10	15.80	1,880,000,016	0.000001	0.008
100%		0	15.30	1,880,000,015	0.000001	0.008
100%		+10	3.90	1,880,000,004	0.000000	0.002
100%		+20	-27.00	1,879,999,973	-0.000001	-0.014
100%		+30	-41.30	1,879,999,959	-0.000002	-0.022
100%		+40	44.60	1,880,000,045	0.000002	0.024
100%		+50	-15.60	1,879,999,984	-0.000001	-0.008
100%		+60	47.90	1,880,000,048	0.000003	0.025
85%	3.35	+20	16.90	1,880,000,017	0.000001	0.009
115%	4.26	+20	17.30	1,880,000,017	0.000001	0.009
Batt.Endpoint	3.35	+20	16.90	1,880,000,017	0.000001	0.009


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

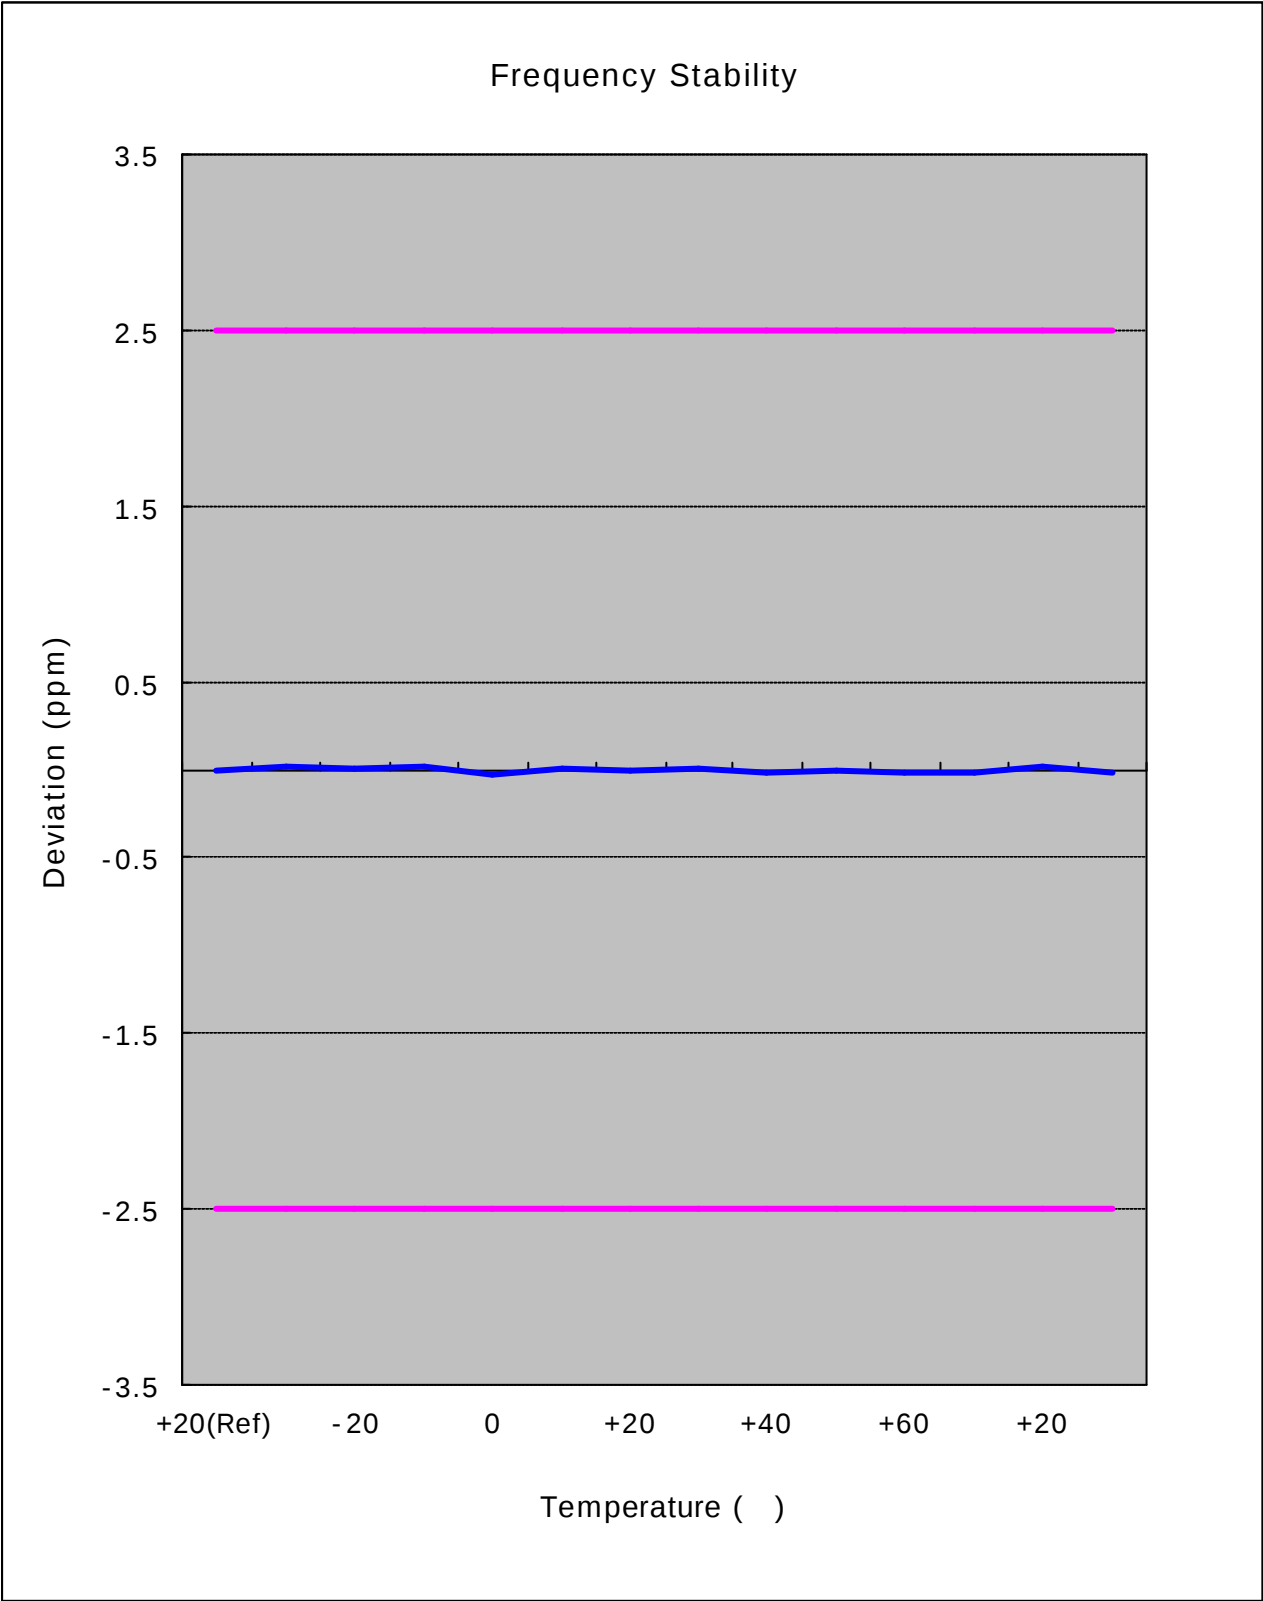

Zoom IN

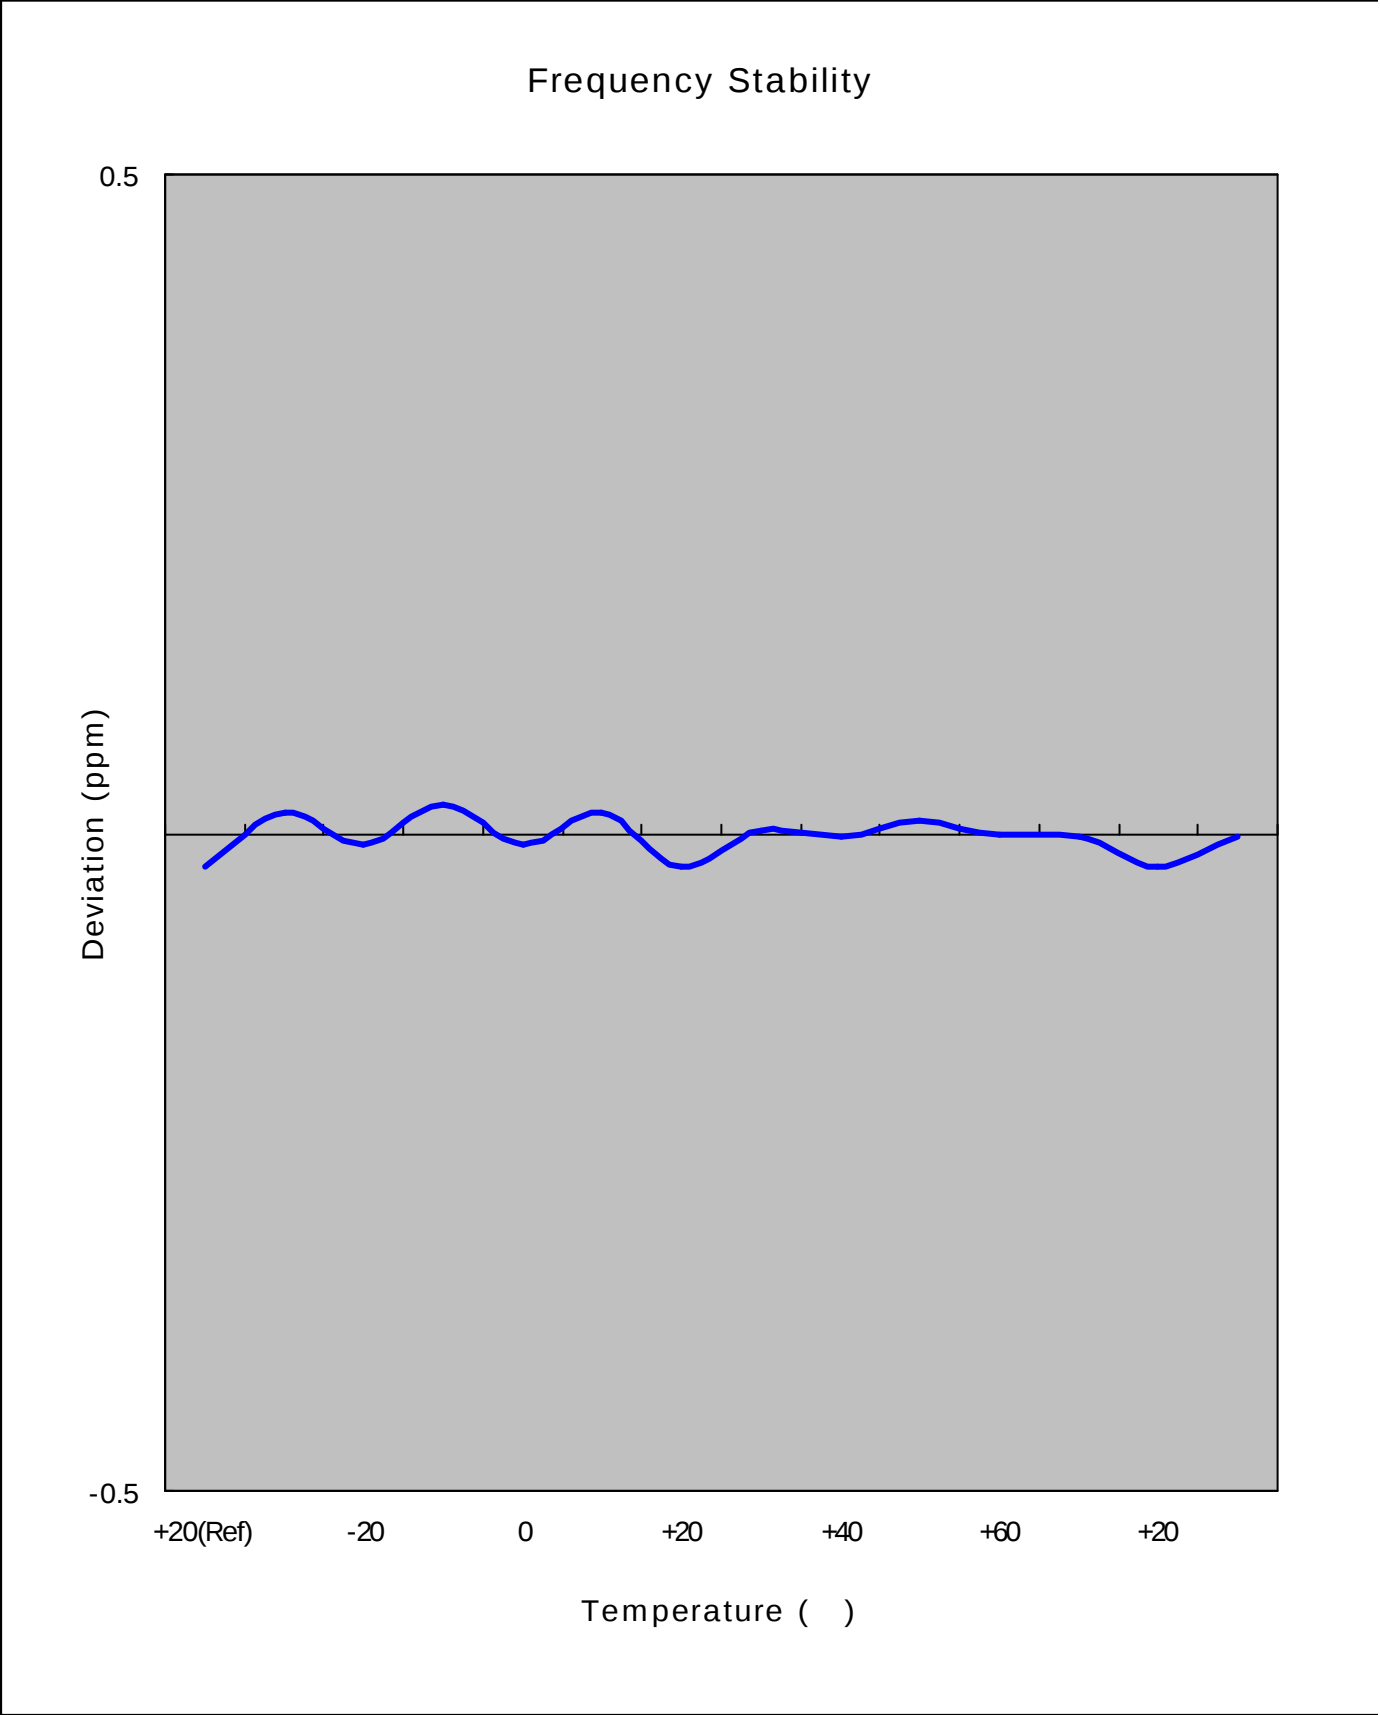



7. CONCLUSION


The data collected shows that the SAMSUNG 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx Only. FCC ID : A3LGTB3210 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850

Agilent


R T

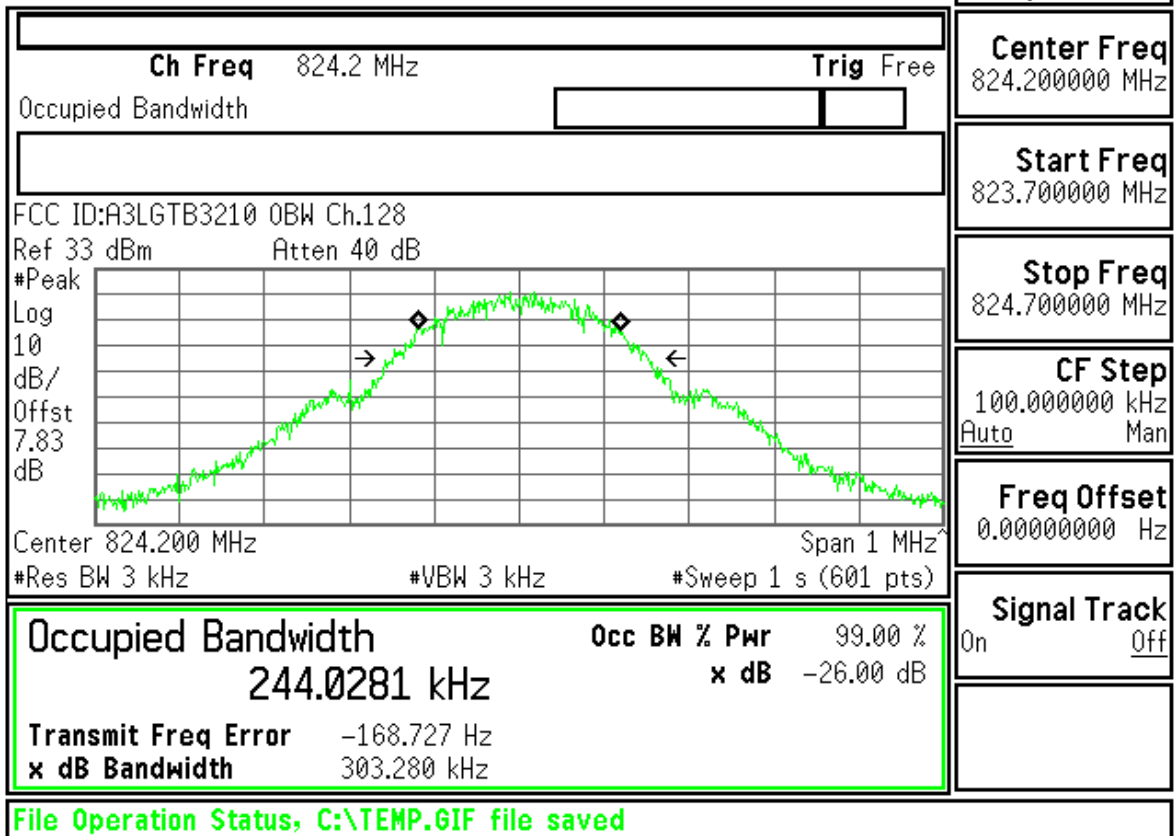


Freq/Channel
Center Freq 824.200000 MHz
Start Freq 823.700000 MHz
Stop Freq 824.700000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

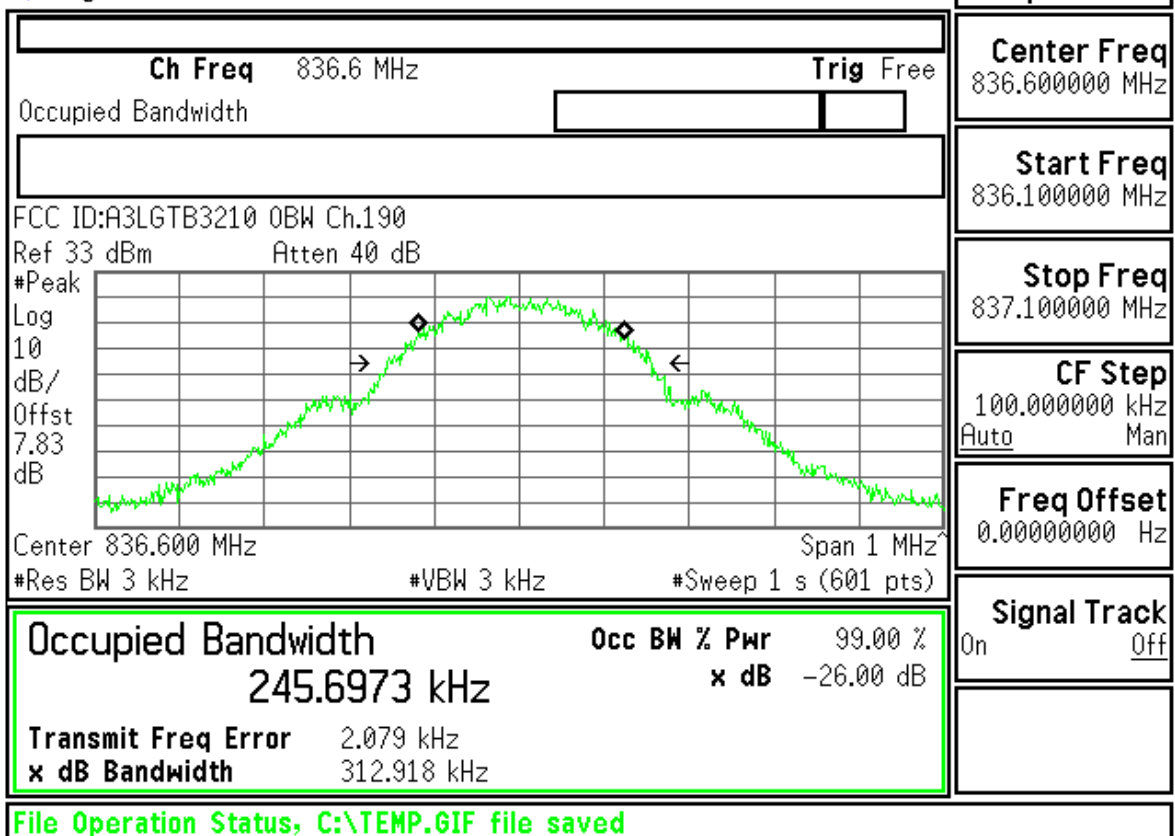

Freq/Channel
Center Freq 836.600000 MHz
Start Freq 836.100000 MHz
Stop Freq 837.100000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


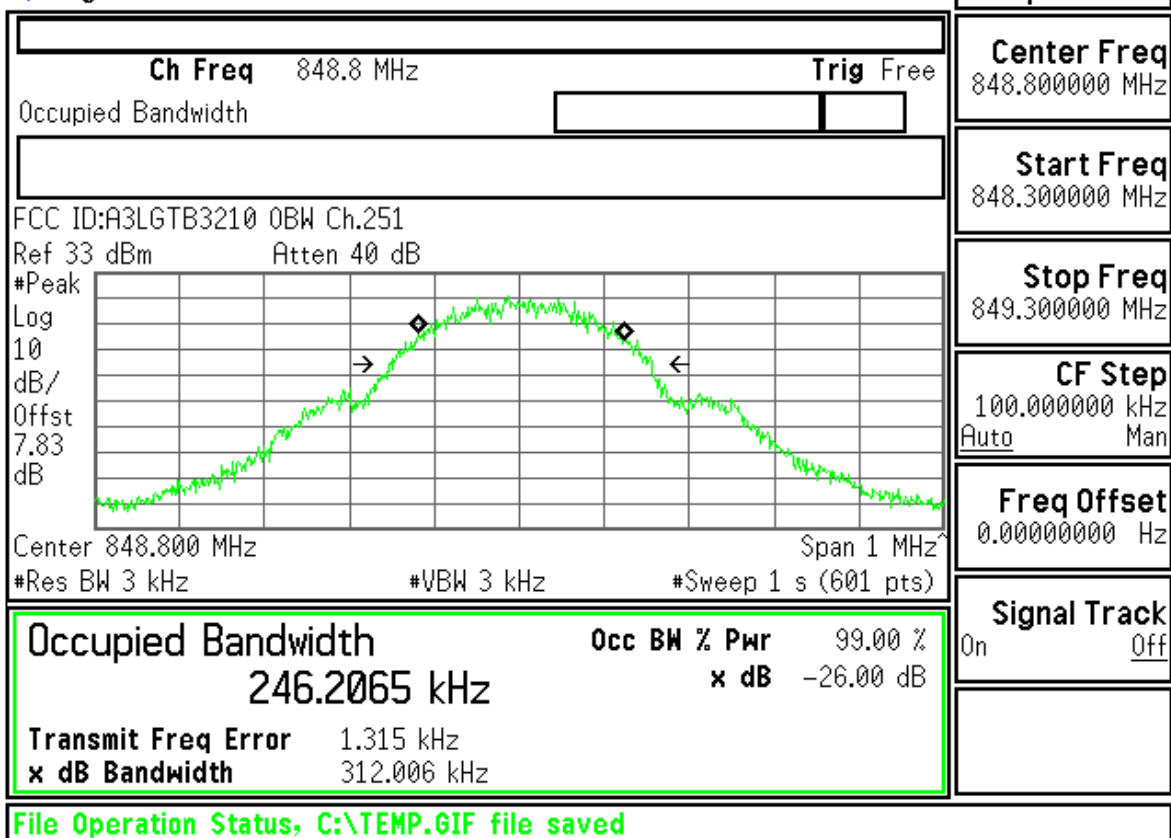




Measurement/Instrument Screen																															
Control		Transmit Power								TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.22</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.22</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.22	----	----	----	Estimated Carrier Power	32.22	----	----	----	Downlink Traffic Power ▾						
											Burst 1	Burst 2	Burst 3	Burst 4																	
										Burst Power	32.22	----	----	----																	
										Estimated Carrier Power	32.22	----	----	----																	
Traffic Band																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.40</td> <td>0.42</td> <td>-15.08</td> </tr> <tr> <td>Maximum</td> <td>3.50</td> <td>1.03</td> <td>-5.43</td> </tr> <tr> <td>Average</td> <td>2.15</td> <td>0.71</td> <td>-10.84</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.40	0.42	-15.08	Maximum	3.50	1.03	-5.43	Average	2.15	0.71	-10.84	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.40	0.42	-15.08																		
										Maximum	3.50	1.03	-5.43																		
Average	2.15	0.71	-10.84																												
Pass/Fail	Pass	Pass	Pass																												
128																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.40</td> <td>0.42</td> <td>-15.08</td> </tr> <tr> <td>Maximum</td> <td>3.50</td> <td>1.03</td> <td>-5.43</td> </tr> <tr> <td>Average</td> <td>2.15</td> <td>0.71</td> <td>-10.84</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.40	0.42	-15.08	Maximum	3.50	1.03	-5.43	Average	2.15	0.71	-10.84	Pass/Fail	Pass	Pass	Pass	MS TX Level	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.40	0.42	-15.08																		
										Maximum	3.50	1.03	-5.43																		
Average	2.15	0.71	-10.84																												
Pass/Fail	Pass	Pass	Pass																												
5																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.40</td> <td>0.42</td> <td>-15.08</td> </tr> <tr> <td>Maximum</td> <td>3.50</td> <td>1.03</td> <td>-5.43</td> </tr> <tr> <td>Average</td> <td>2.15</td> <td>0.71</td> <td>-10.84</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.40	0.42	-15.08	Maximum	3.50	1.03	-5.43	Average	2.15	0.71	-10.84	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.40	0.42	-15.08																		
										Maximum	3.50	1.03	-5.43																		
Average	2.15	0.71	-10.84																												
Pass/Fail	Pass	Pass	Pass																												
Return																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.40</td> <td>0.42</td> <td>-15.08</td> </tr> <tr> <td>Maximum</td> <td>3.50</td> <td>1.03</td> <td>-5.43</td> </tr> <tr> <td>Average</td> <td>2.15</td> <td>0.71</td> <td>-10.84</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.40	0.42	-15.08	Maximum	3.50	1.03	-5.43	Average	2.15	0.71	-10.84	Pass/Fail	Pass	Pass	Pass	1 of 2	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.40	0.42	-15.08																		
										Maximum	3.50	1.03	-5.43																		
Average	2.15	0.71	-10.84																												
Pass/Fail	Pass	Pass	Pass																												
1 of 2																															


Measurement/Instrument Screen																															
Control		Transmit Power								TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.34</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.34</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.34	----	----	----	Estimated Carrier Power	32.34	----	----	----	Downlink Traffic Power ▾						
											Burst 1	Burst 2	Burst 3	Burst 4																	
										Burst Power	32.34	----	----	----																	
										Estimated Carrier Power	32.34	----	----	----																	
Traffic Band																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.23</td> <td>0.38</td> <td>-21.43</td> </tr> <tr> <td>Maximum</td> <td>2.27</td> <td>0.71</td> <td>-10.65</td> </tr> <tr> <td>Average</td> <td>1.70</td> <td>0.54</td> <td>-17.19</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.23	0.38	-21.43	Maximum	2.27	0.71	-10.65	Average	1.70	0.54	-17.19	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.23	0.38	-21.43																		
										Maximum	2.27	0.71	-10.65																		
Average	1.70	0.54	-17.19																												
Pass/Fail	Pass	Pass	Pass																												
190																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.23</td> <td>0.38</td> <td>-21.43</td> </tr> <tr> <td>Maximum</td> <td>2.27</td> <td>0.71</td> <td>-10.65</td> </tr> <tr> <td>Average</td> <td>1.70</td> <td>0.54</td> <td>-17.19</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.23	0.38	-21.43	Maximum	2.27	0.71	-10.65	Average	1.70	0.54	-17.19	Pass/Fail	Pass	Pass	Pass	MS TX Level	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.23	0.38	-21.43																		
										Maximum	2.27	0.71	-10.65																		
Average	1.70	0.54	-17.19																												
Pass/Fail	Pass	Pass	Pass																												
5																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.23</td> <td>0.38</td> <td>-21.43</td> </tr> <tr> <td>Maximum</td> <td>2.27</td> <td>0.71</td> <td>-10.65</td> </tr> <tr> <td>Average</td> <td>1.70</td> <td>0.54</td> <td>-17.19</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.23	0.38	-21.43	Maximum	2.27	0.71	-10.65	Average	1.70	0.54	-17.19	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.23	0.38	-21.43																		
										Maximum	2.27	0.71	-10.65																		
Average	1.70	0.54	-17.19																												
Pass/Fail	Pass	Pass	Pass																												
Return																															
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.23</td> <td>0.38</td> <td>-21.43</td> </tr> <tr> <td>Maximum</td> <td>2.27</td> <td>0.71</td> <td>-10.65</td> </tr> <tr> <td>Average</td> <td>1.70</td> <td>0.54</td> <td>-17.19</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.23	0.38	-21.43	Maximum	2.27	0.71	-10.65	Average	1.70	0.54	-17.19	Pass/Fail	Pass	Pass	Pass	1 of 2	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	1.23	0.38	-21.43																		
										Maximum	2.27	0.71	-10.65																		
Average	1.70	0.54	-17.19																												
Pass/Fail	Pass	Pass	Pass																												
1 of 2																															



Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.50</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.50</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.50	----	----	----	Estimated Carrier Power	32.50	----	----	----	Downlink Traffic Power						
			Burst 1	Burst 2	Burst 3	Burst 4																							
		Burst Power	32.50	----	----	----																							
		Estimated Carrier Power	32.50	----	----	----																							
Traffic Band																													
		Single						GS1850																					
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.33</td> <td>0.47</td> <td>-16.01</td> </tr> <tr> <td>Maximum</td> <td>2.69</td> <td>0.73</td> <td>-6.17</td> </tr> <tr> <td>Average</td> <td>1.86</td> <td>0.61</td> <td>-10.57</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.33	0.47	-16.01	Maximum	2.69	0.73	-6.17	Average	1.86	0.61	-10.57	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
			Peak Phase °	RMS Phase °	Frequency Hz																								
		Minimum	1.33	0.47	-16.01																								
		Maximum	2.69	0.73	-6.17																								
Average	1.86	0.61	-10.57																										
Pass/Fail	Pass	Pass	Pass																										
		50 / 50						251																					
		Single						MS TX Level																					
								5																					
		Active Cell Connected						Channel Mode Setup																					
		Sys Type: GSM						Return																					
1 of 2		IntRef Offset R T						1 of 2																					



Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power																					
Change View								Traffic Band																					
								GS1850																					
								Traffic Channel																					
		Continuous						128																					
		<table border="1"> <thead> <tr> <th>Burst</th> <th>TX Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.23</td> <td>GSMK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	TX Power (dBm)	Modulation	Mask	1	32.23	GSMK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	MS TX Level	
Burst	TX Power (dBm)	Modulation	Mask																										
1	32.23	GSMK	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
								5																					
		Active Cell Connected						Channel Mode Setup																					
		Sys Type: GSM						Return																					
1 of 2		IntRef Offset R T						1 of 2																					

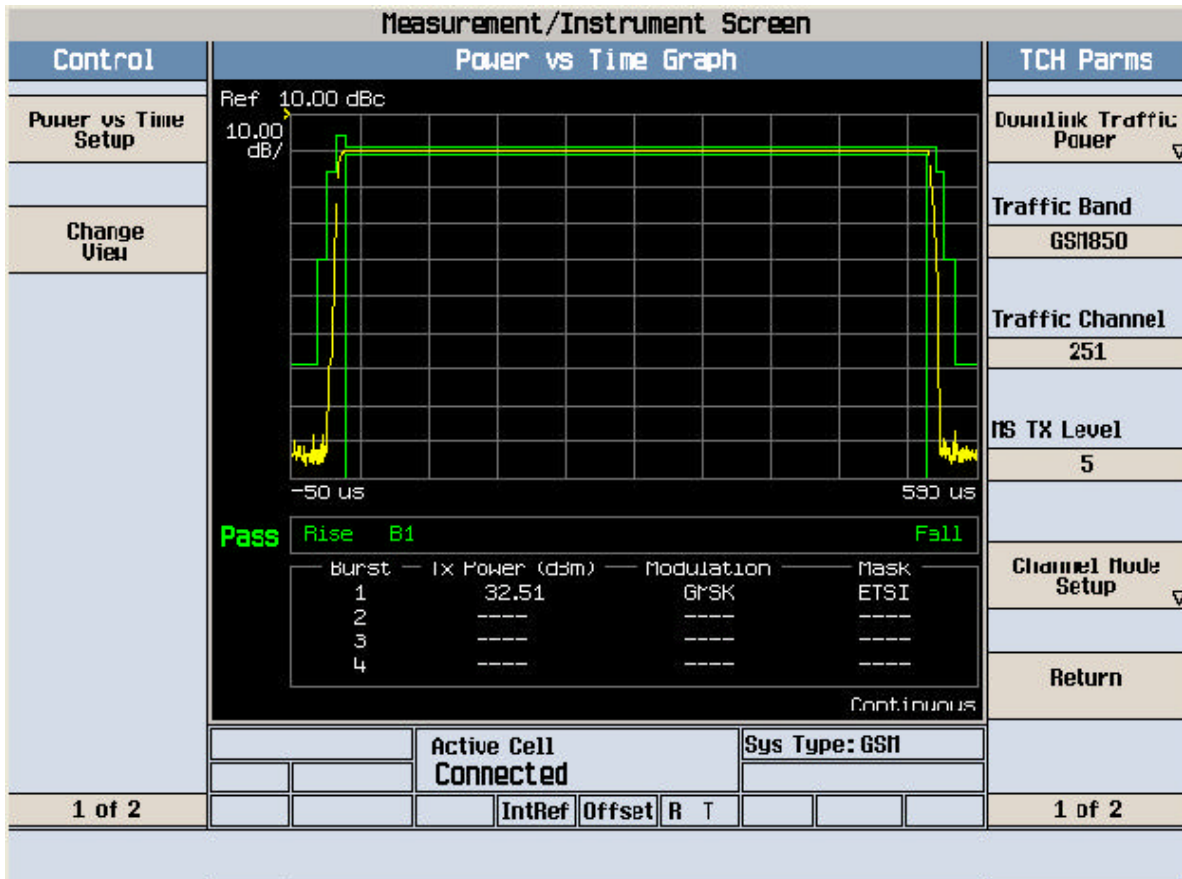
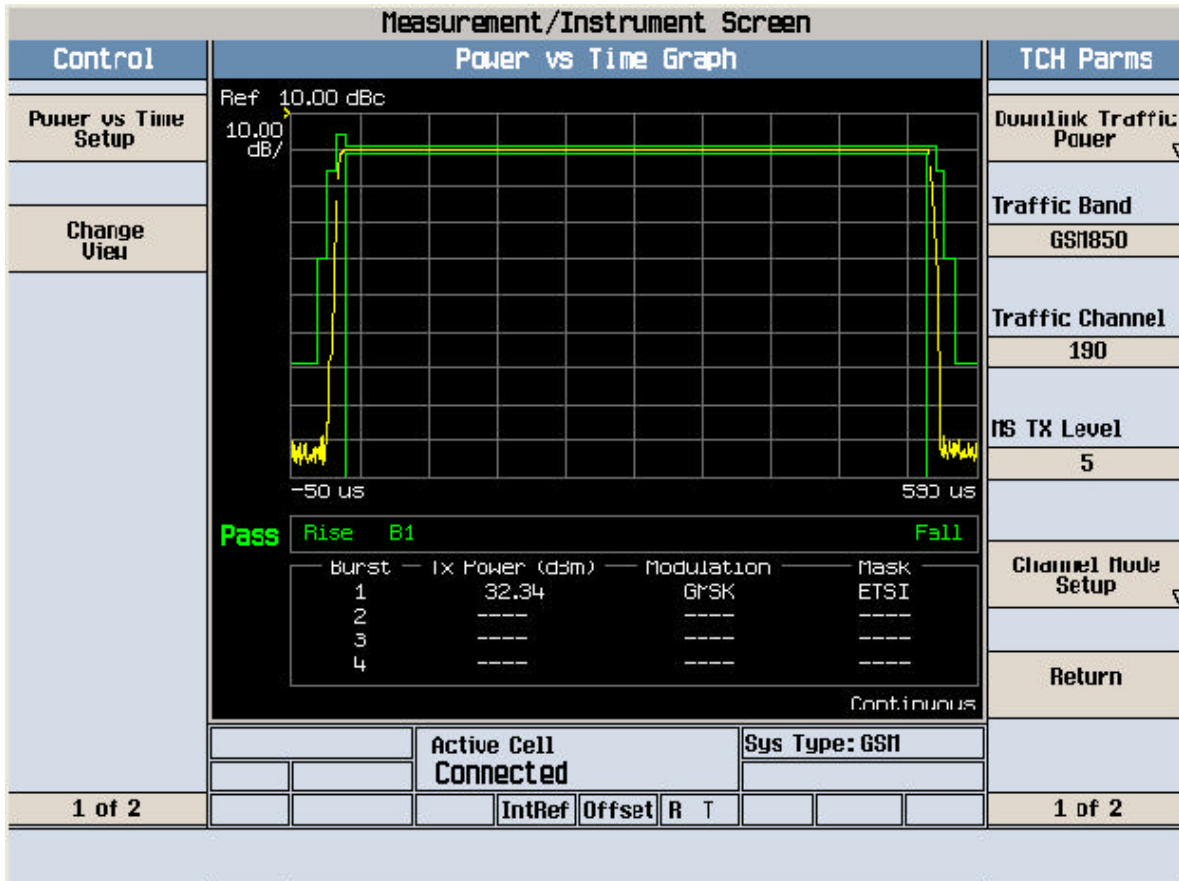


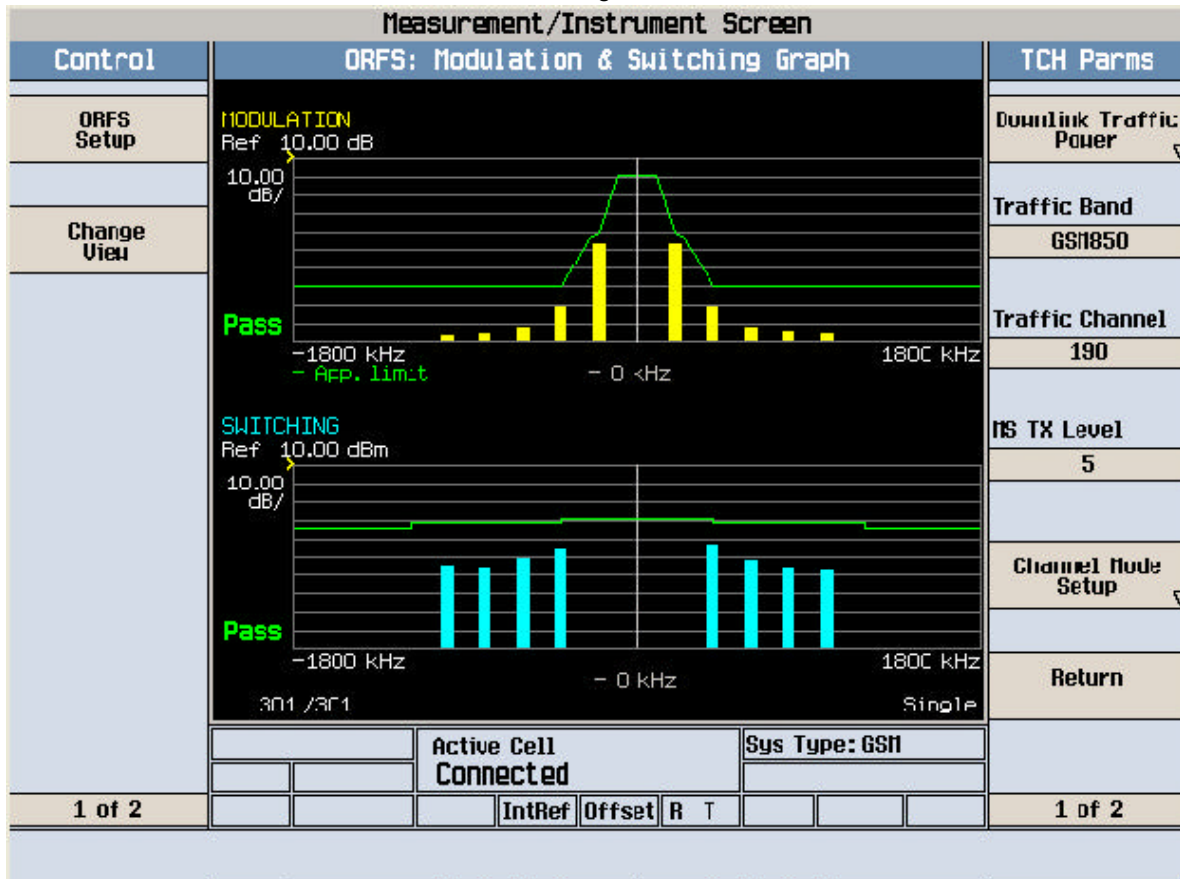
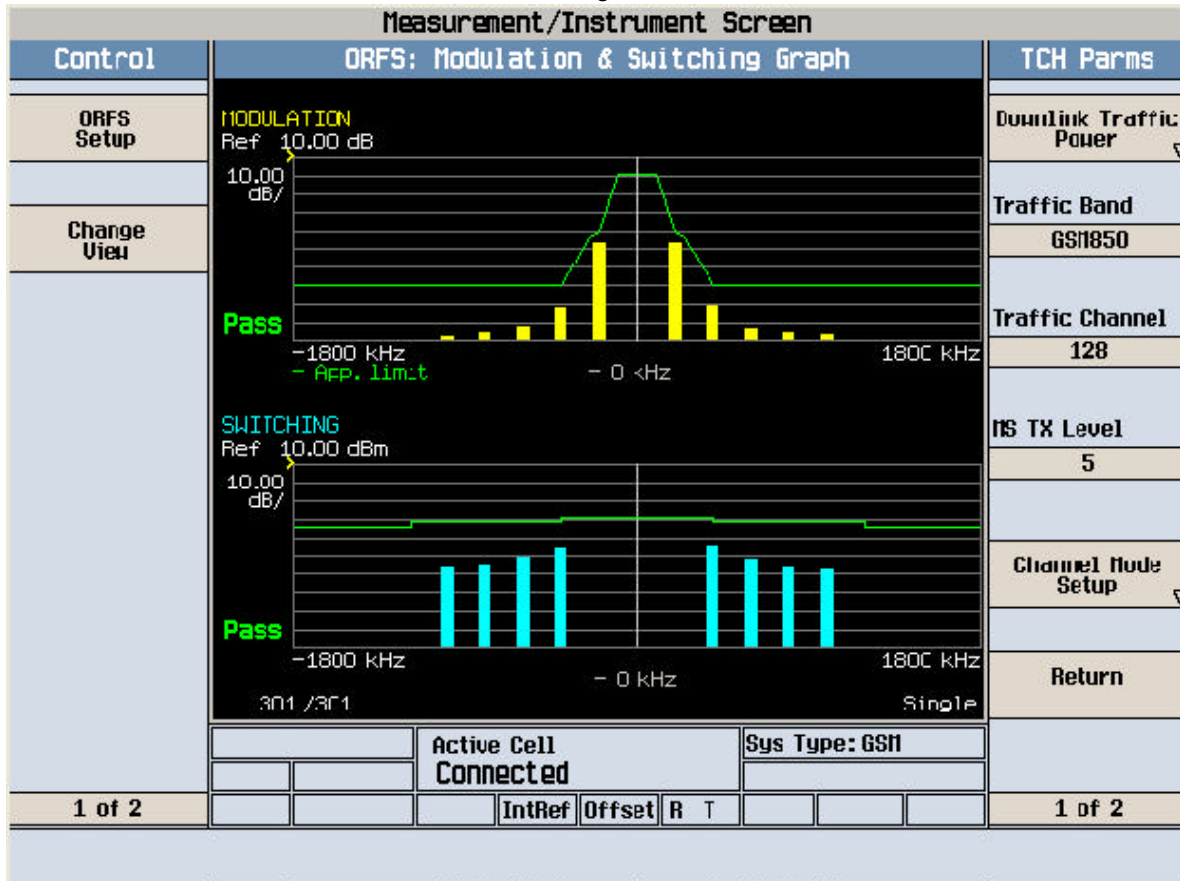



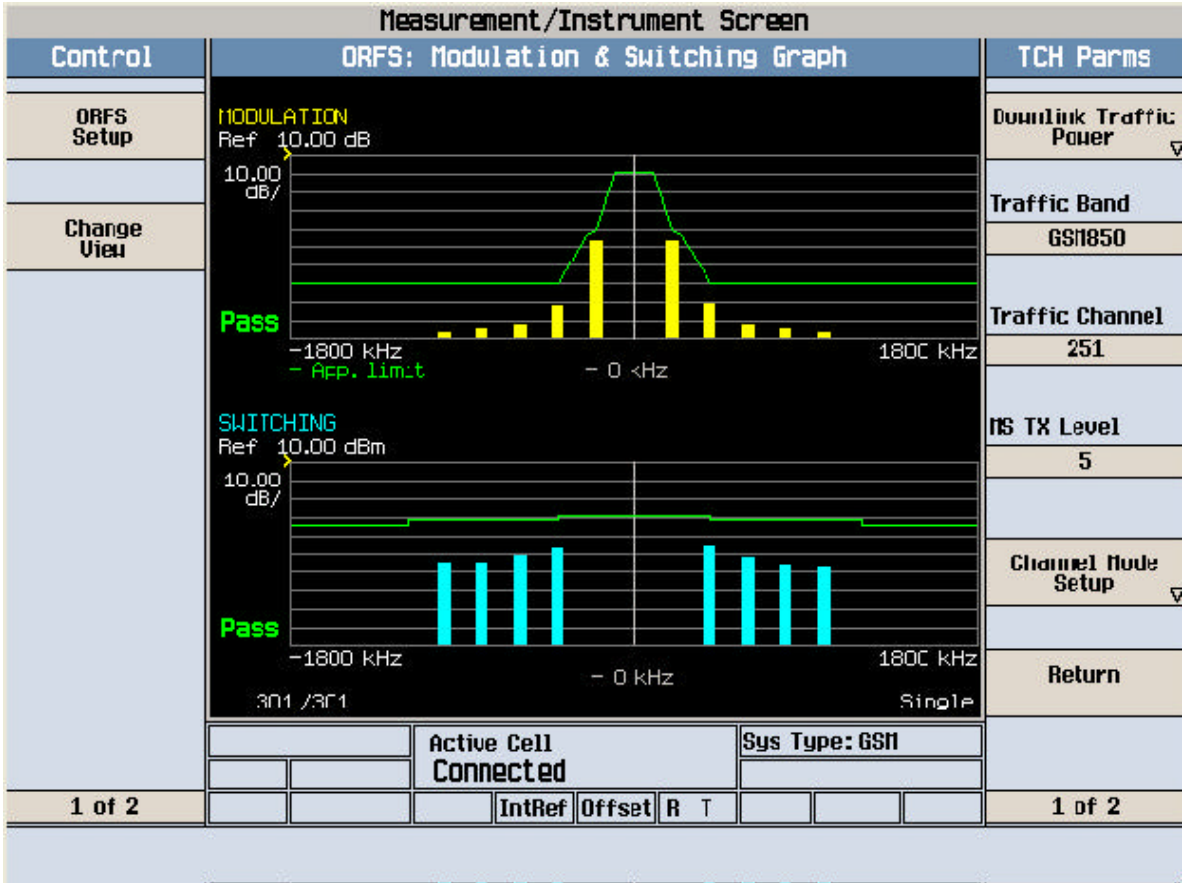


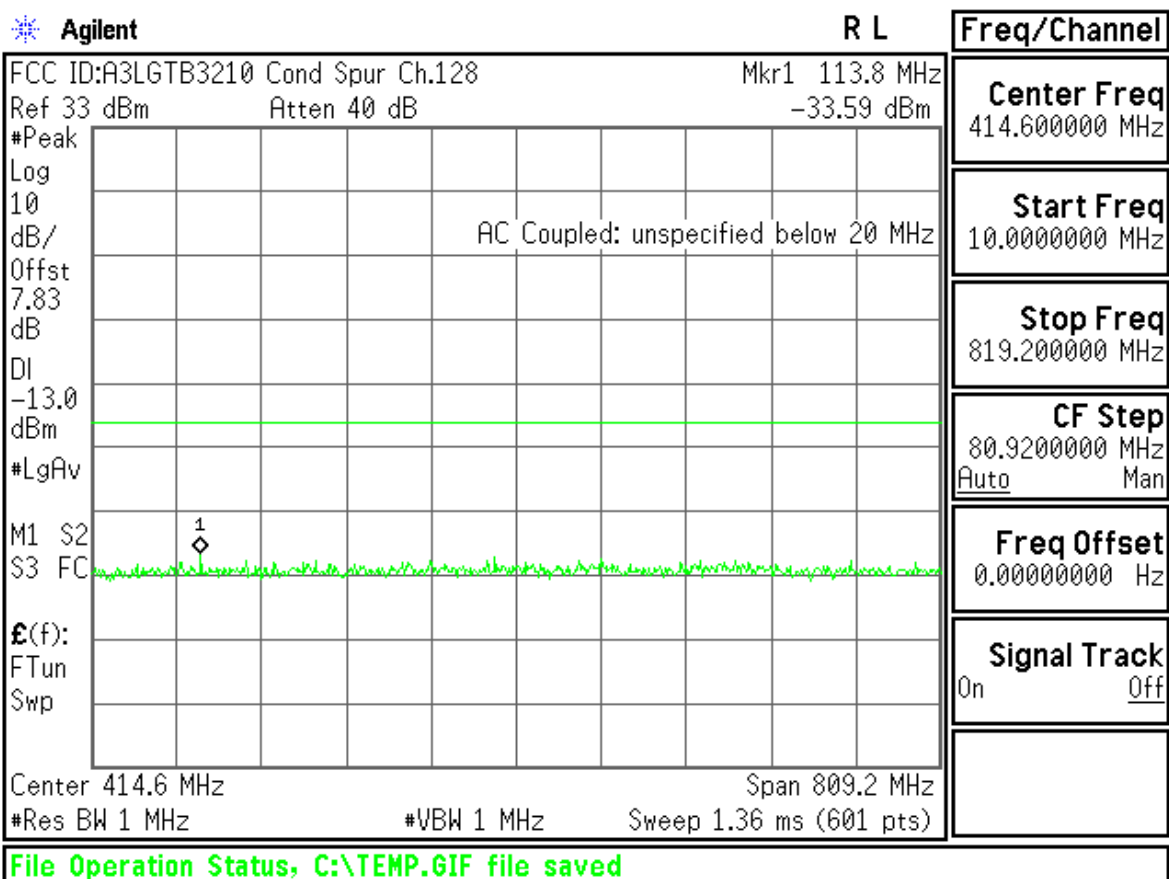
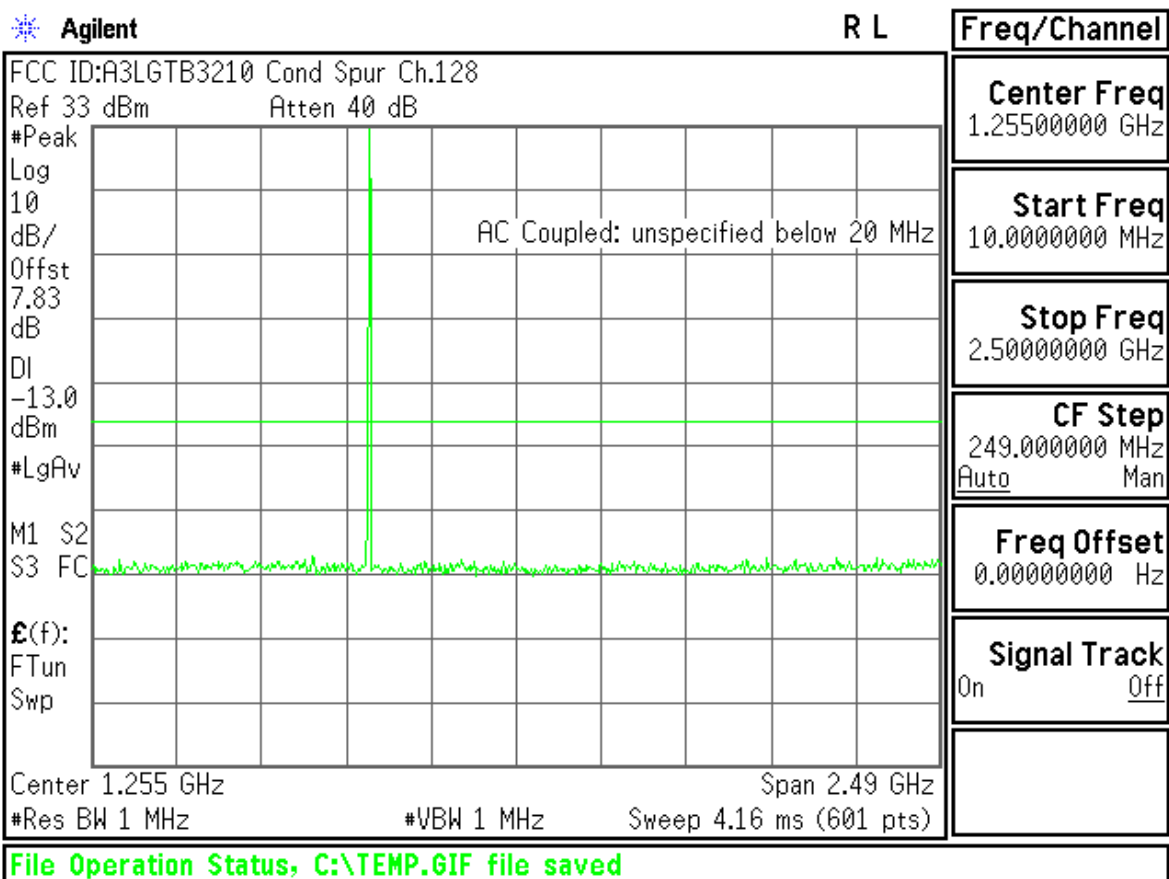


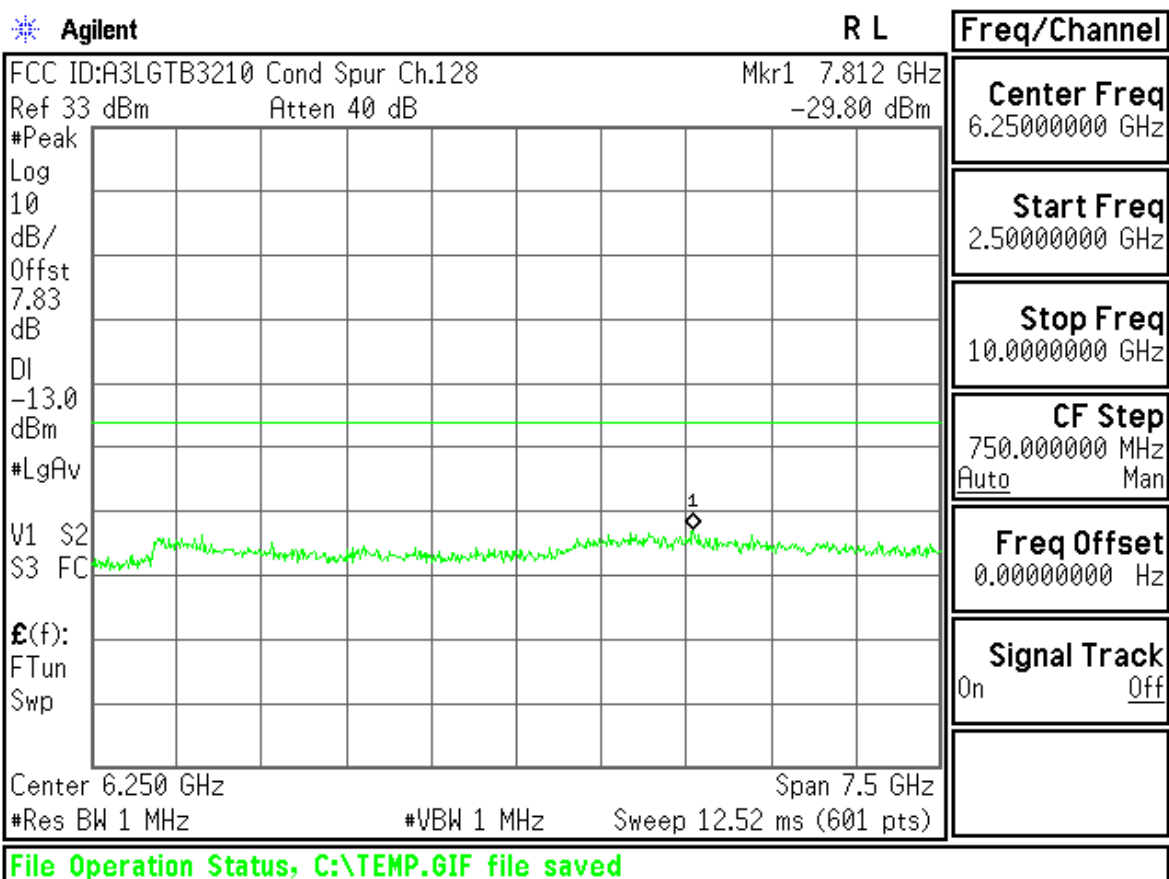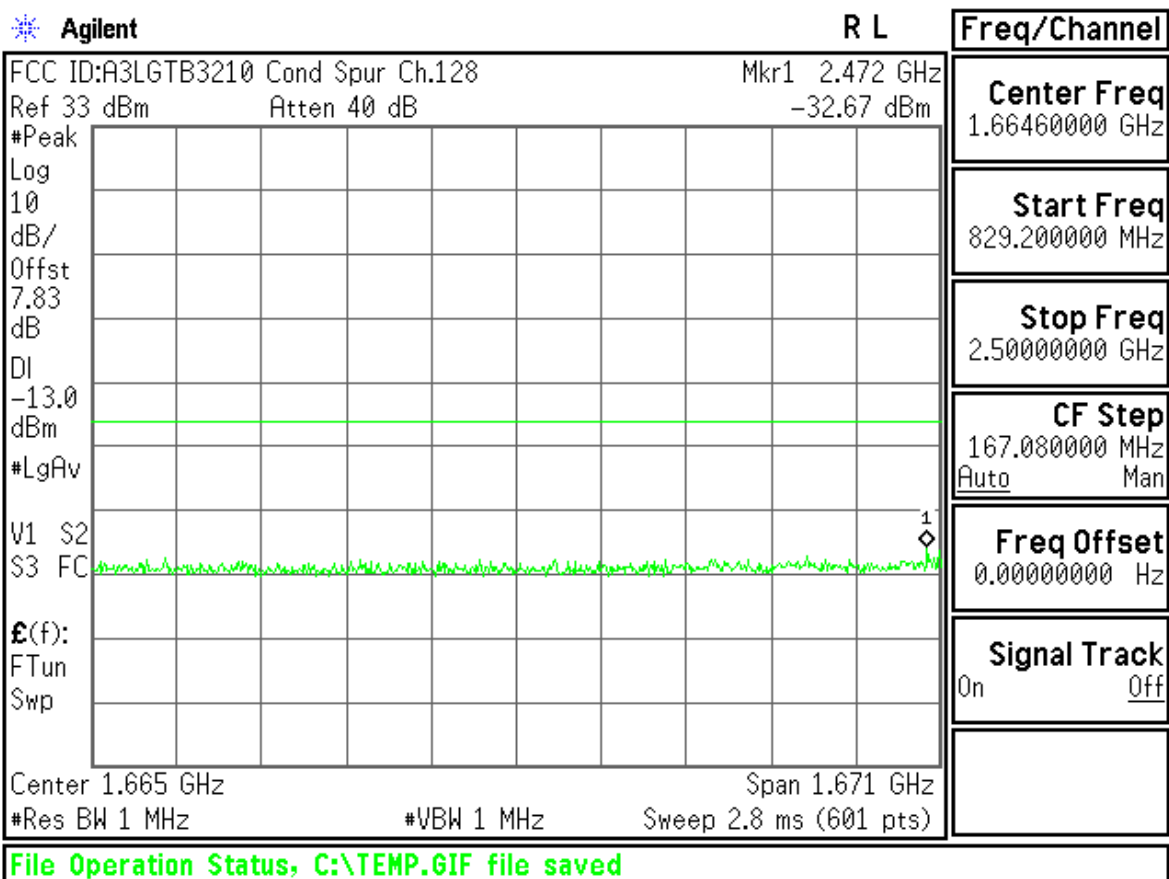

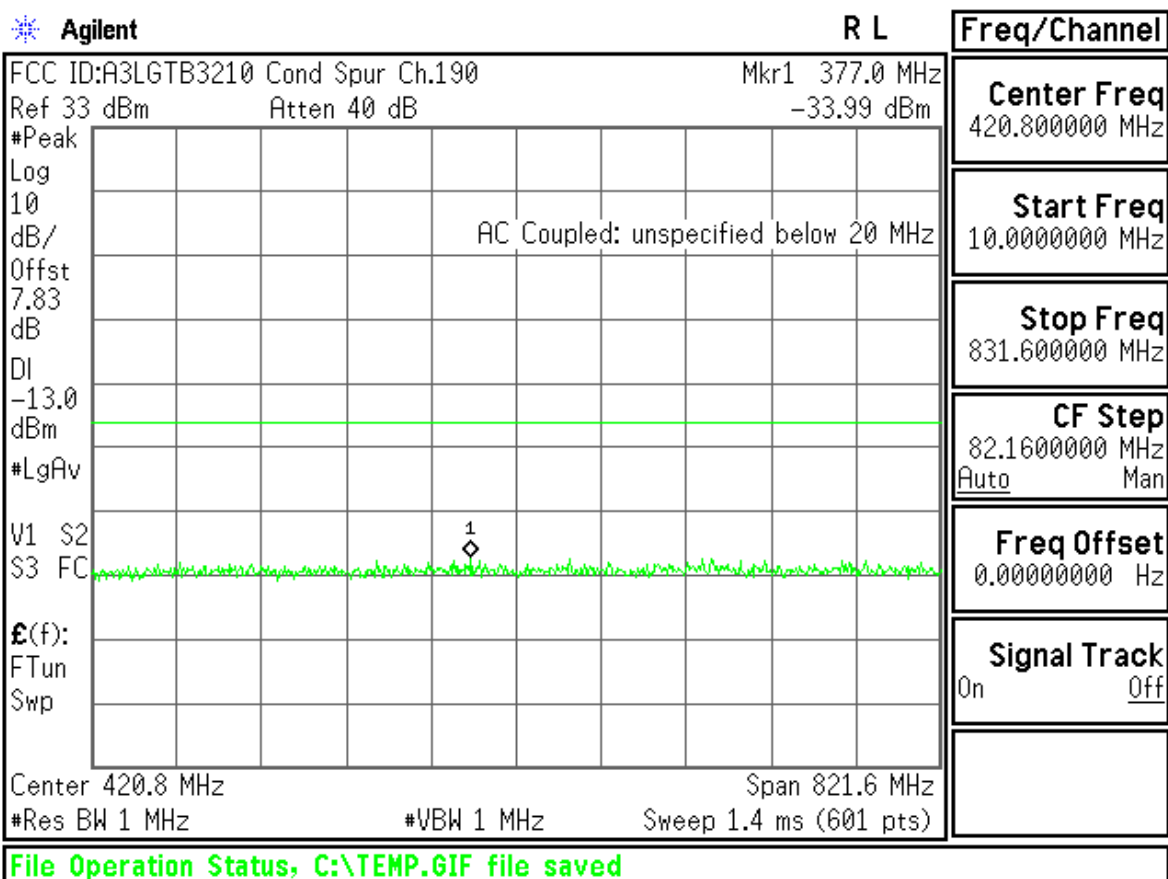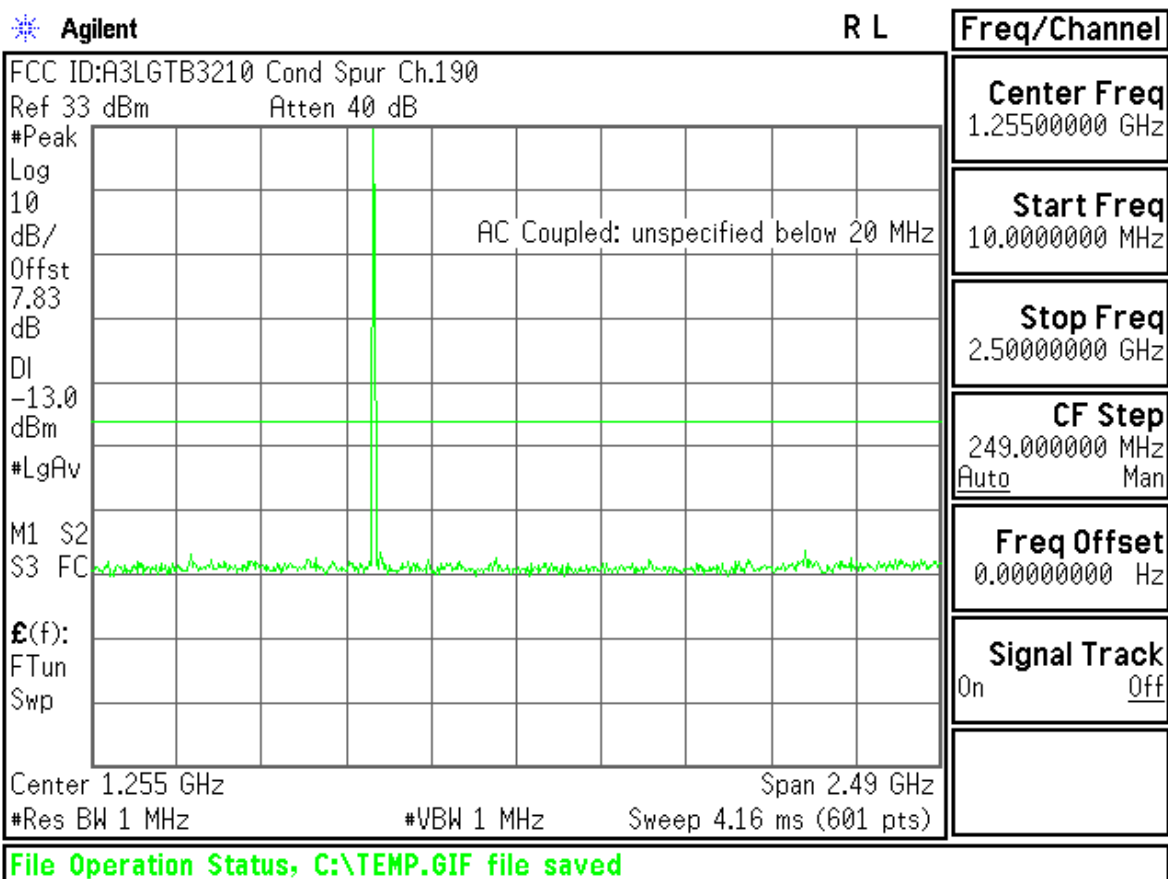

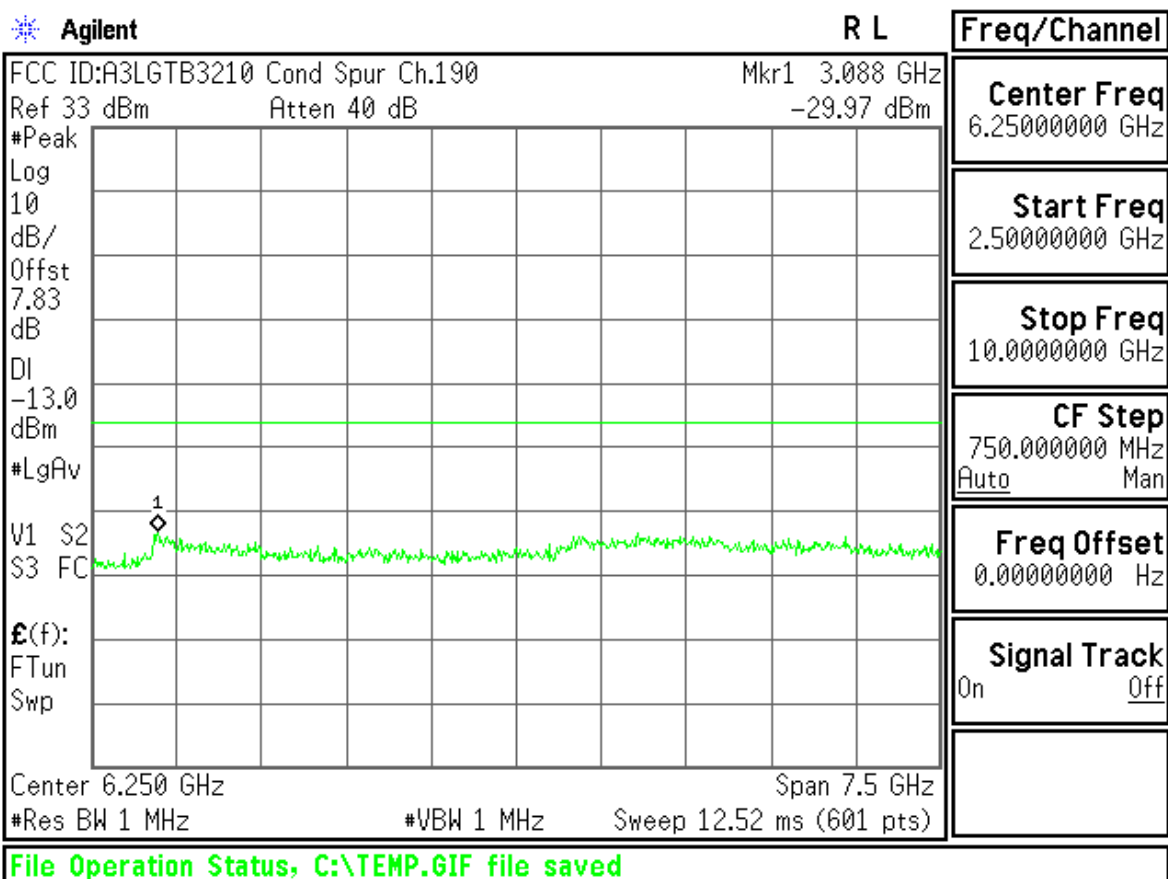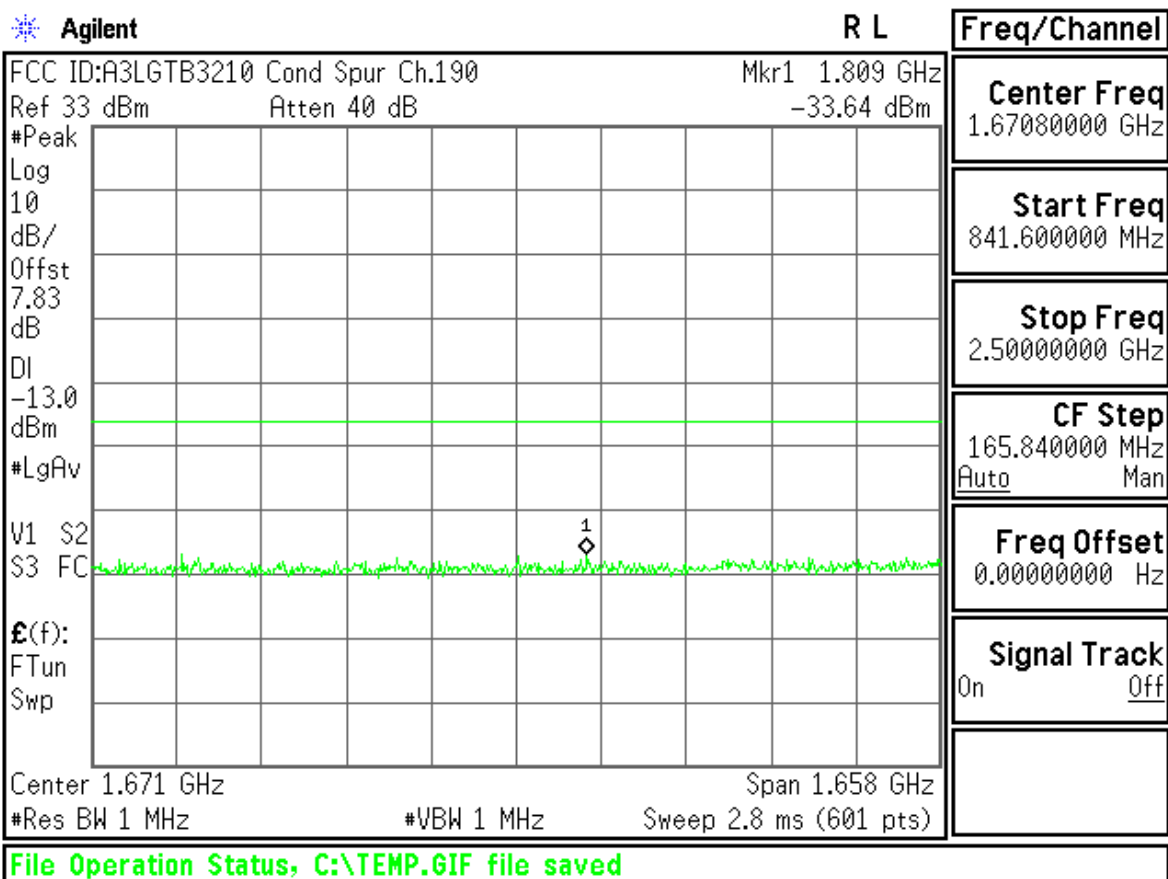

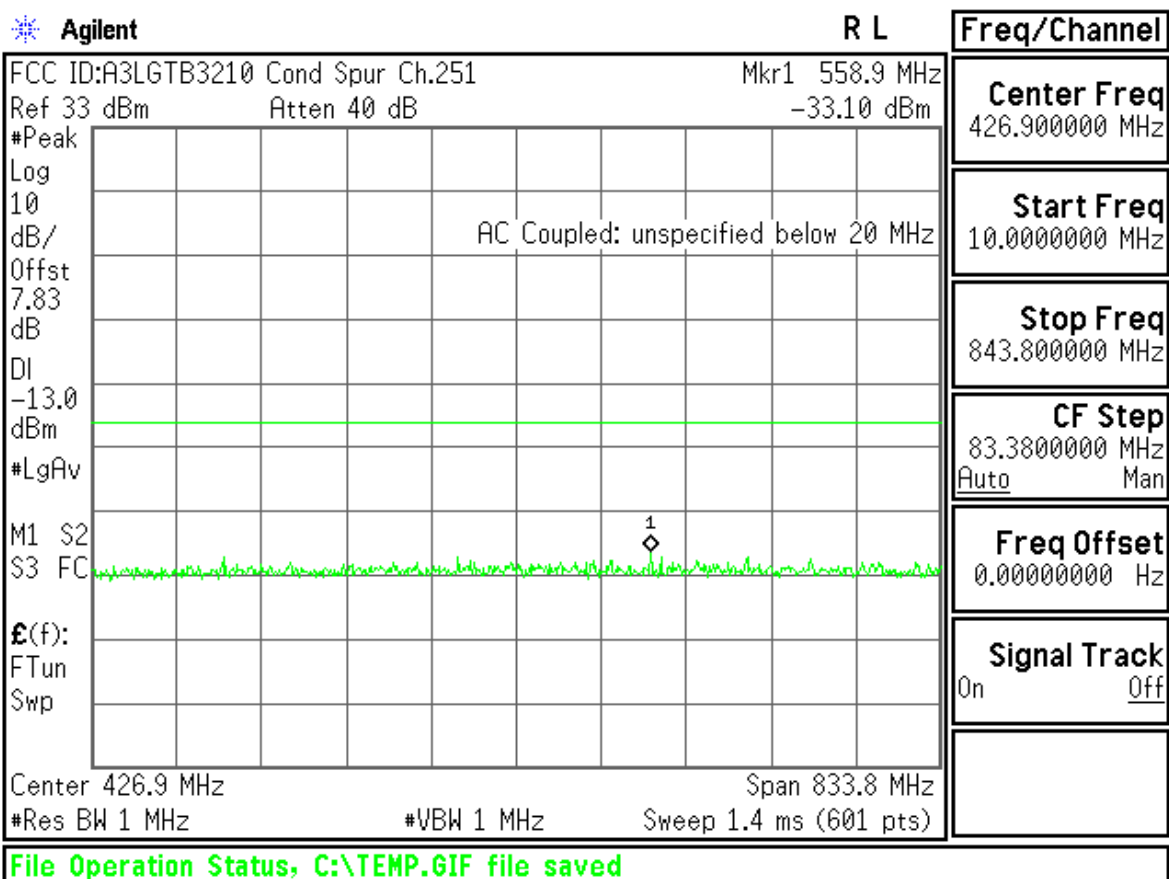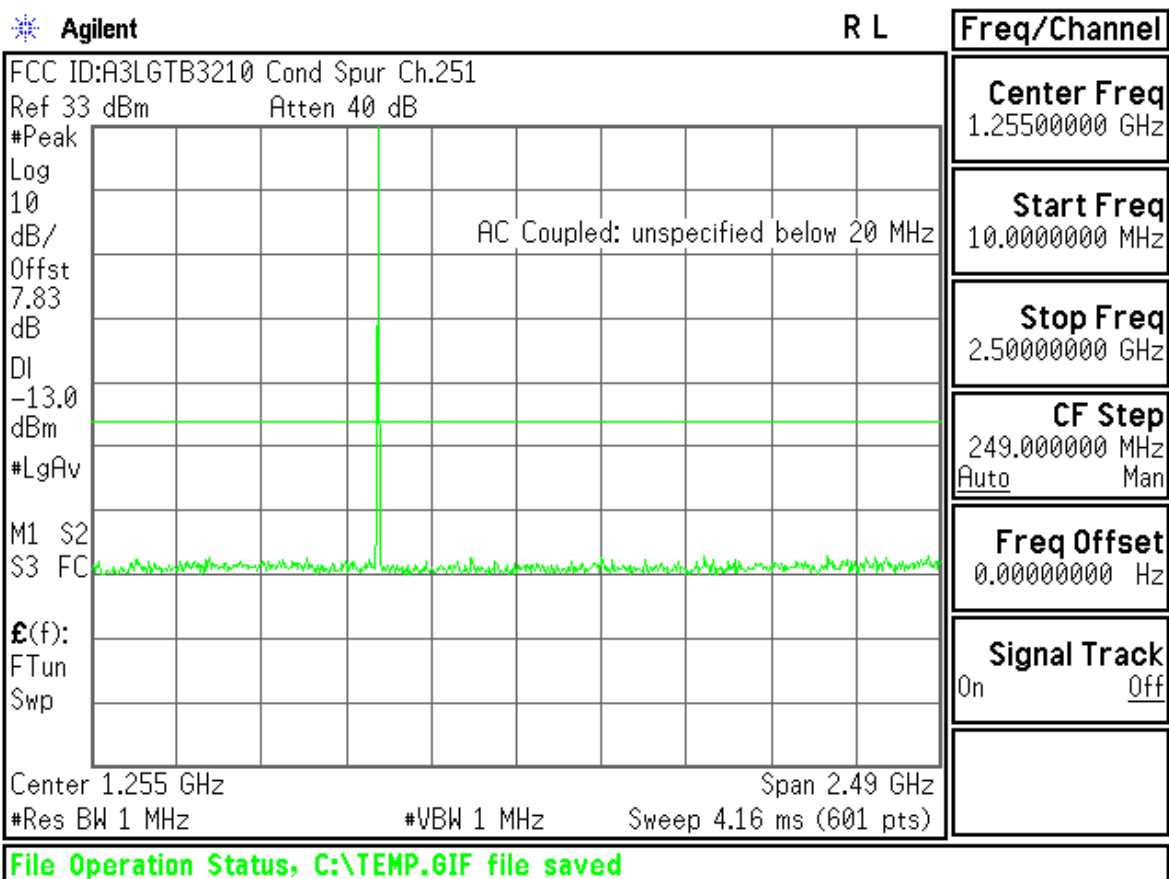

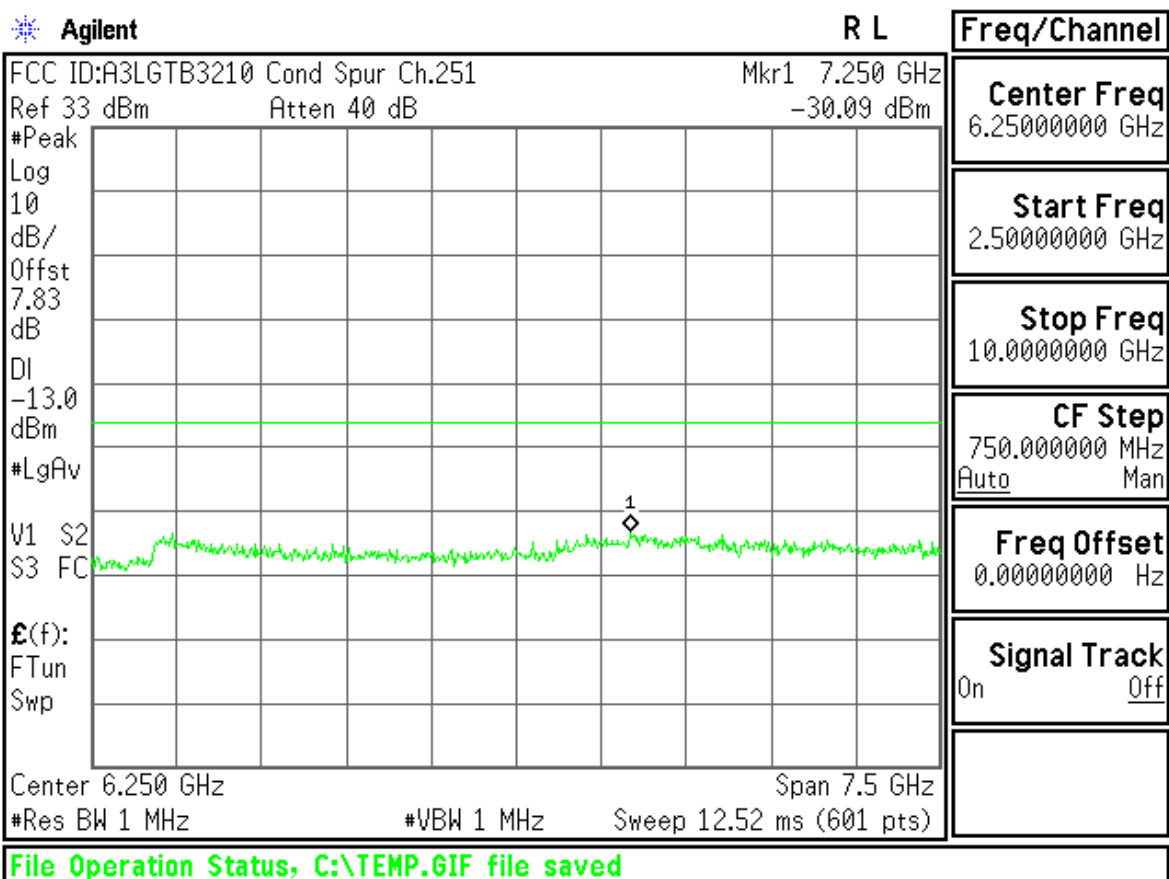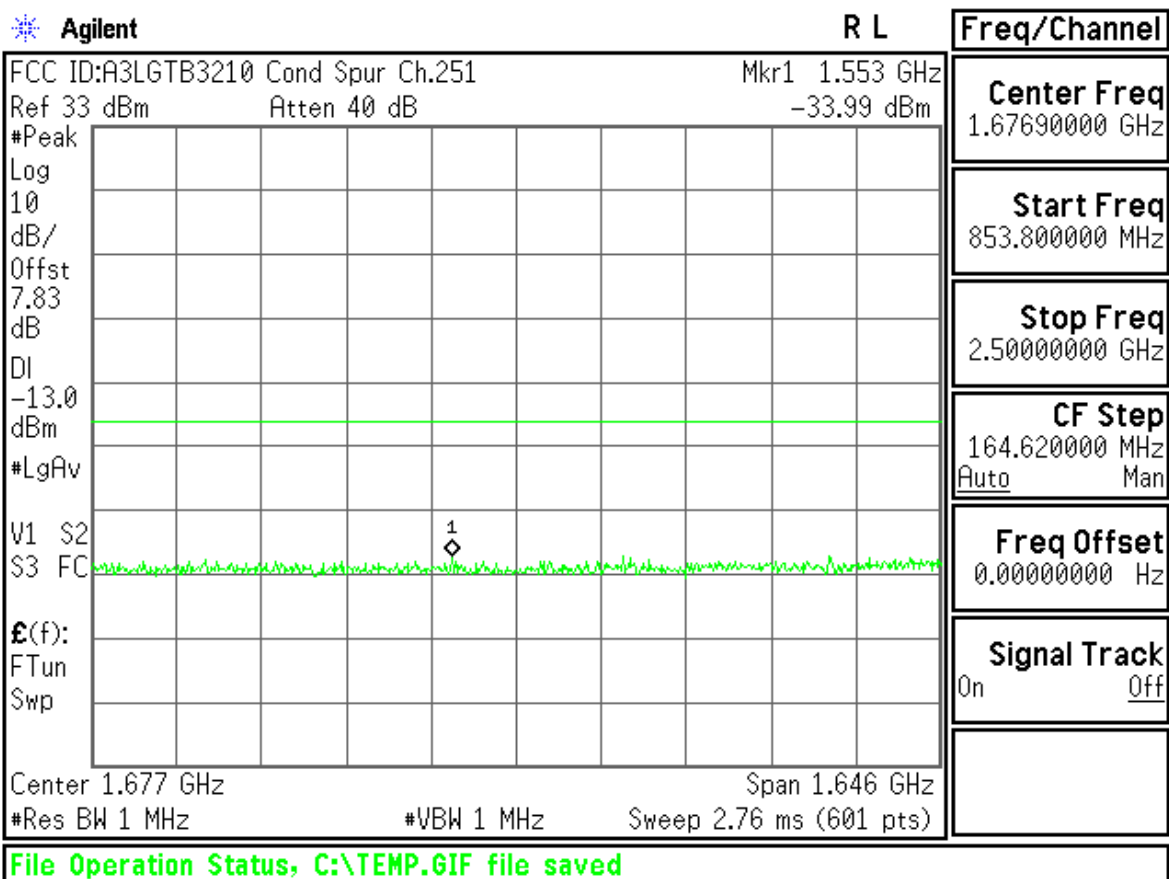

Agilent

R L

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.83

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

f>50k

Swp

Center 824.000 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Span 810 kHz

File Operation Status, C:\TEMP.GIF file saved

Center Freq

824.000000 MHz

Start Freq

823.595000 MHz

Stop Freq

824.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Agilent

R T

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

Mkr1 823.962 5 MHz

-18.13 dBm

#Avg

Log

10

dB/

Offst

7.83

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

f>50k

Swp

Center 823.595 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Span 810 kHz

File Operation Status, C:\TEMP.GIF file saved

Center Freq

823.595000 MHz

Start Freq

823.190000 MHz

Stop Freq

824.000000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Agilent

R L

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.83

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

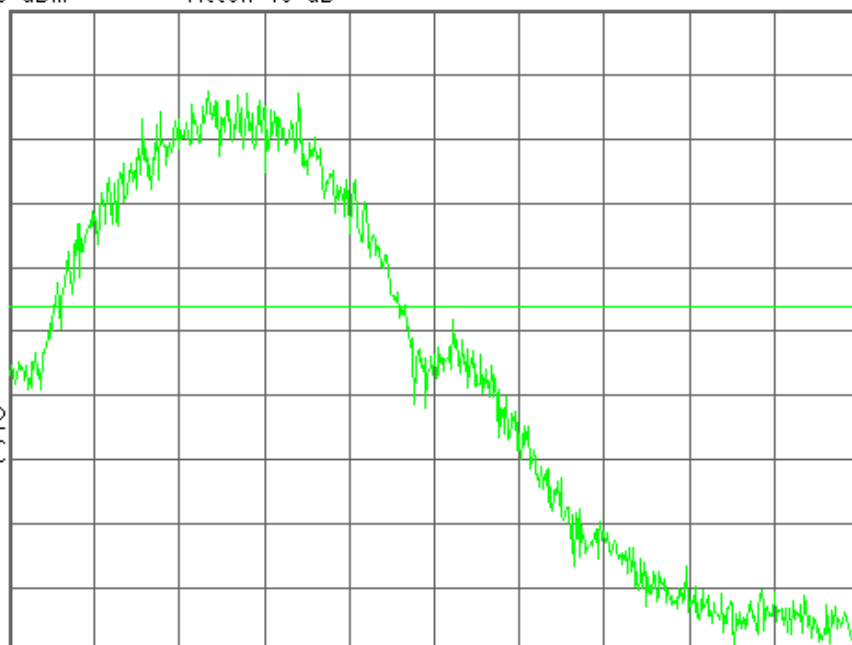

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

849.000000 MHz

Start Freq

848.595000 MHz

Stop Freq

849.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.251

Mkr1 849.020 1 MHz

Ref 33 dBm

Atten 40 dB

-16.93 dBm

#Avg

Log

10

dB/

Offst

7.83

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

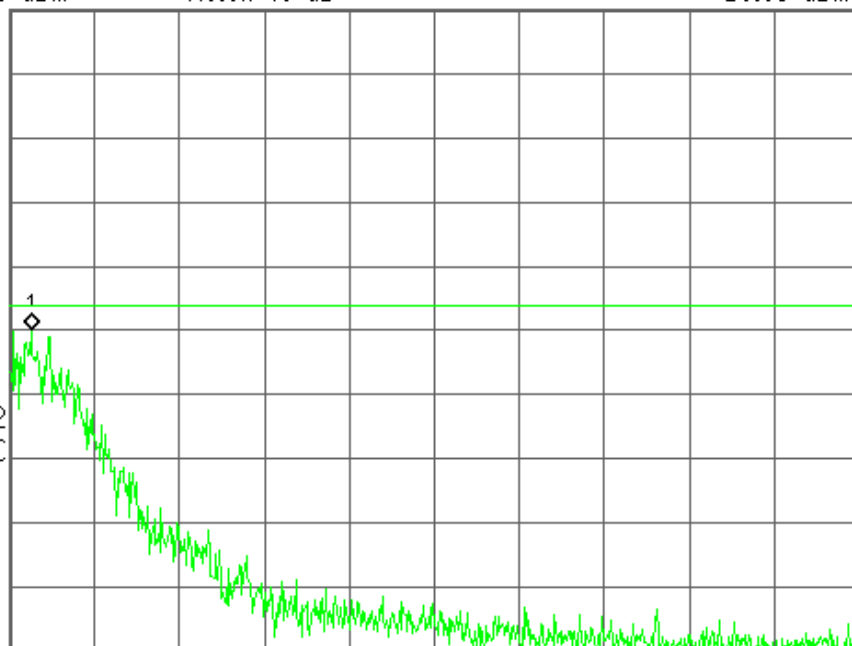

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

849.405000 MHz

Start Freq

849.000000 MHz

Stop Freq

849.810000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On


Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent


R T

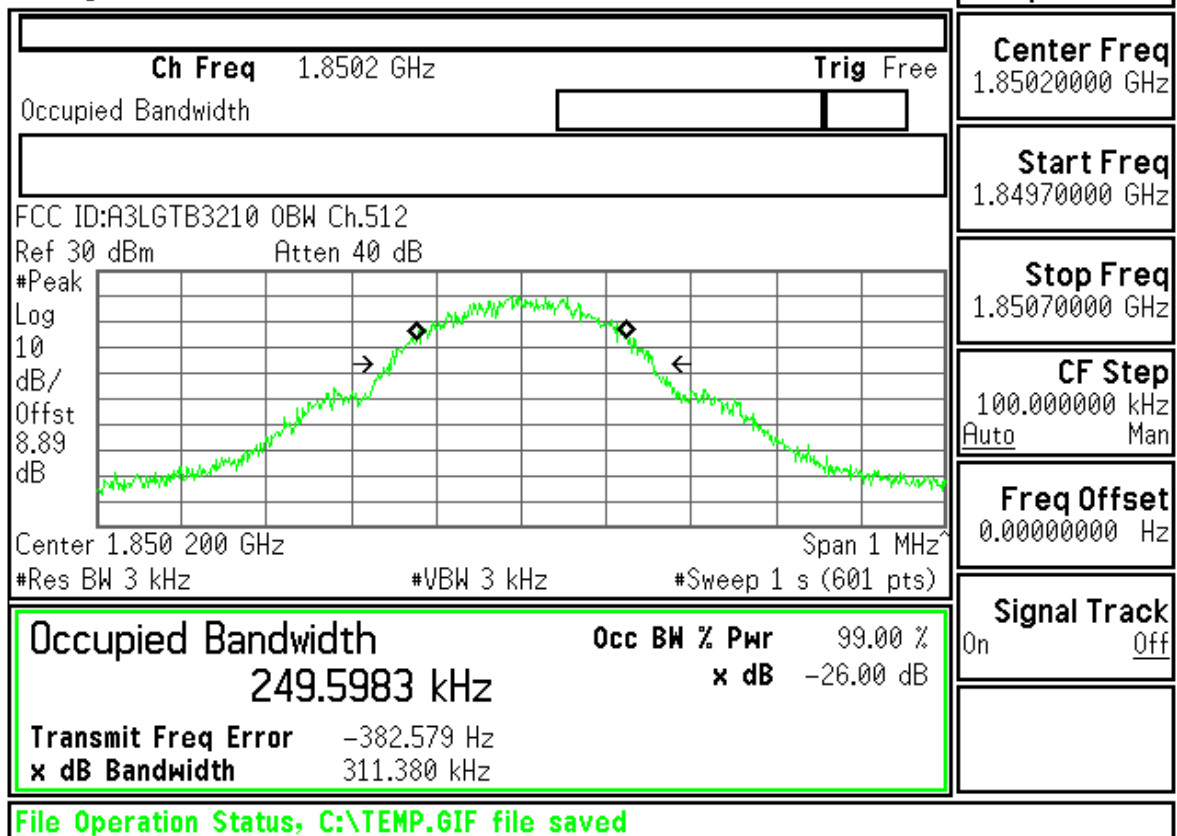


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

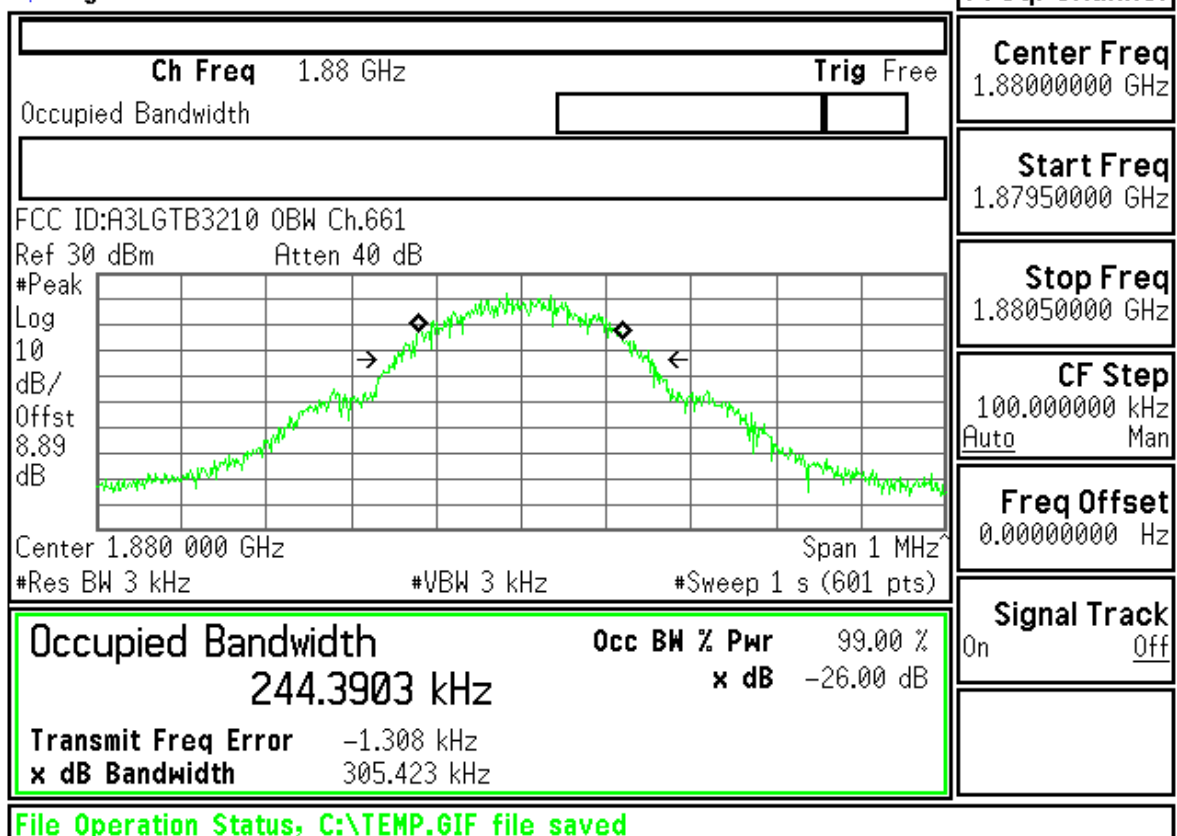

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


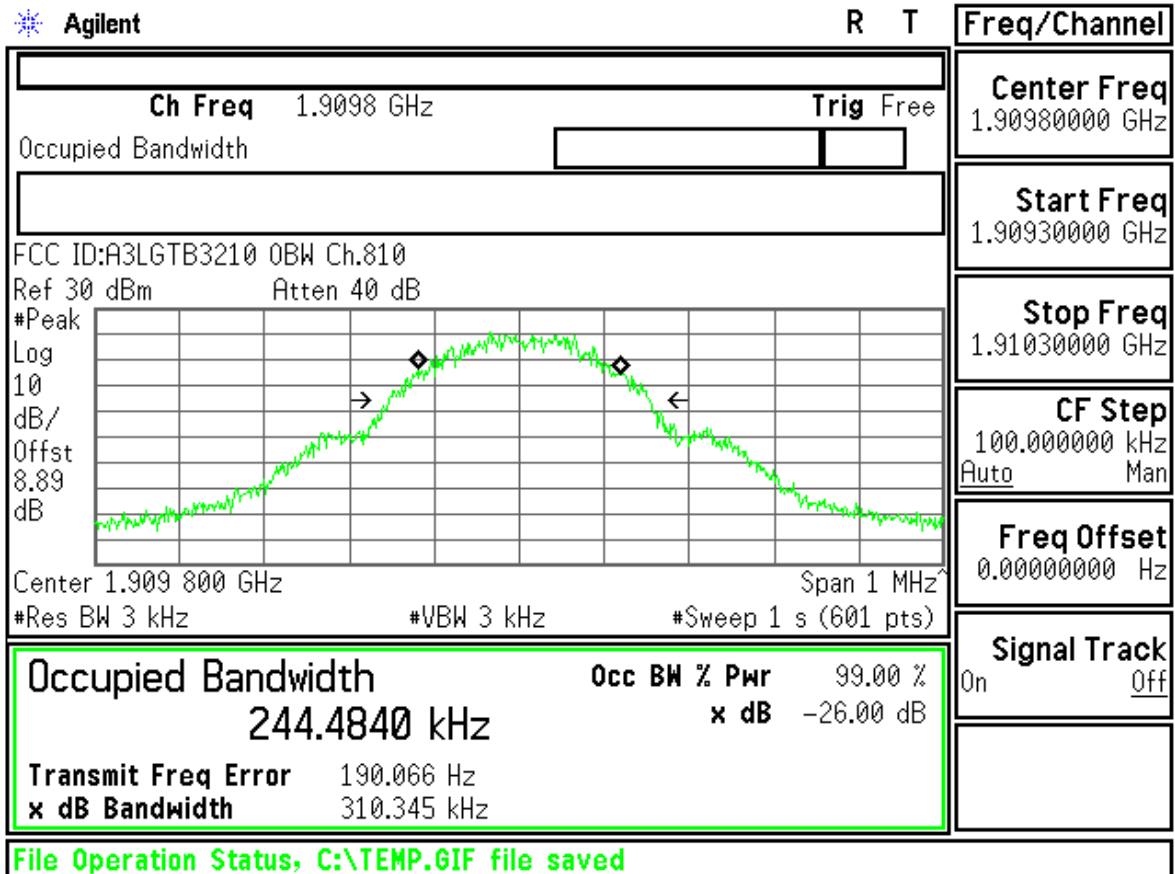




FCC ID : A3LGTB3210 Transmit Power 512CH



Measurement/Instrument Screen																																
Control		Transmit Power								TCH Parms																						
Transmit Power Setup		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.38</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.38</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.38	----	----	----	Estimated Carrier Power	29.38	----	----	----	Downlink Traffic Power							
	Burst 1									Burst 2	Burst 3	Burst 4																				
Burst Power	29.38									----	----	----																				
Estimated Carrier Power	29.38									----	----	----																				
Traffic Band																																
Snap Window Positions		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>2.83</td><td>0.97</td><td>-36.63</td></tr><tr><td>Maximum</td><td>4.74</td><td>1.51</td><td>-15.41</td></tr><tr><td>Average</td><td>3.51</td><td>1.19</td><td>-26.55</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.83	0.97	-36.63	Maximum	4.74	1.51	-15.41	Average	3.51	1.19	-26.55	Pass/Fail	Pass	Pass	Pass	PCS		
											Peak Phase °	RMS Phase °	Frequency Hz																			
										Minimum	2.83	0.97	-36.63																			
										Maximum	4.74	1.51	-15.41																			
Average	3.51	1.19	-26.55																													
Pass/Fail	Pass	Pass	Pass																													
Traffic Channel																																
1 of 2		50 / 50 <table><tr><td colspan="3">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td colspan="3"></td><td colspan="3"></td></tr><tr><td>IntRef</td><td>Offset</td><td>R T</td><td></td><td></td><td></td></tr></table>								Active Cell Connected			Sys Type: GSM									IntRef	Offset	R T				512				
										Active Cell Connected			Sys Type: GSM																			
										IntRef	Offset	R T																				
MS TX Level																																
										0																						
										Channel Mode Setup																						
										Return																						
										1 of 2																						



Measurement/Instrument Screen																														
Control		Transmit Power							TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.97</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.97</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.97	----	----	----	Estimated Carrier Power	29.97	----	----	----	Downlink Traffic Power ▾						
										Burst 1	Burst 2	Burst 3	Burst 4																	
									Burst Power	29.97	----	----	----																	
									Estimated Carrier Power	29.97	----	----	----																	
Traffic Band																														
PCS																														
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.63</td> <td>0.89</td> <td>-43.48</td> </tr> <tr> <td>Maximum</td> <td>6.12</td> <td>1.50</td> <td>-14.26</td> </tr> <tr> <td>Average</td> <td>3.57</td> <td>1.16</td> <td>-29.15</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.63	0.89	-43.48	Maximum	6.12	1.50	-14.26	Average	3.57	1.16	-29.15	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
										Peak Phase °	RMS Phase °	Frequency Hz																		
									Minimum	2.63	0.89	-43.48																		
									Maximum	6.12	1.50	-14.26																		
Average	3.57	1.16	-29.15																											
Pass/Fail	Pass	Pass	Pass																											
661																														
50 / 50		Single							MS TX Level																					
0		Channel Mode Setup ▾							Return																					
1 of 2		Active Cell Connected Sys Type: GSM							1 of 2																					



Measurement/Instrument Screen																																					
Control		Transmit Power							TCH Parms																												
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.29</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.29</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.29	----	----	----	Estimated Carrier Power	29.29	----	----	----	Downlink Traffic Power ▾													
										Burst 1	Burst 2	Burst 3	Burst 4																								
									Burst Power	29.29	----	----	----																								
									Estimated Carrier Power	29.29	----	----	----																								
Traffic Band																																					
PCS		Single							Traffic Channel																												
810		MS TX Level							Return																												
0		Channel Mode Setup ▾							1 of 2																												
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.61</td> <td>1.05</td> <td>-12.75</td> </tr> <tr> <td>Maximum</td> <td>6.14</td> <td>1.48</td> <td>8.82</td> </tr> <tr> <td>Average</td> <td>3.60</td> <td>1.20</td> <td>-1.92</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.61	1.05	-12.75	Maximum	6.14	1.48	8.82	Average	3.60	1.20	-1.92	Pass/Fail	Pass	Pass	Pass	50 / 50		Single						
										Peak Phase °	RMS Phase °	Frequency Hz																									
									Minimum	2.61	1.05	-12.75																									
									Maximum	6.14	1.48	8.82																									
Average	3.60	1.20	-1.92																																		
Pass/Fail	Pass	Pass	Pass																																		
Active Cell Connected		Sys Type: GSM							1 of 2																												
1 of 2		IntRef Offset R T							1 of 2																												

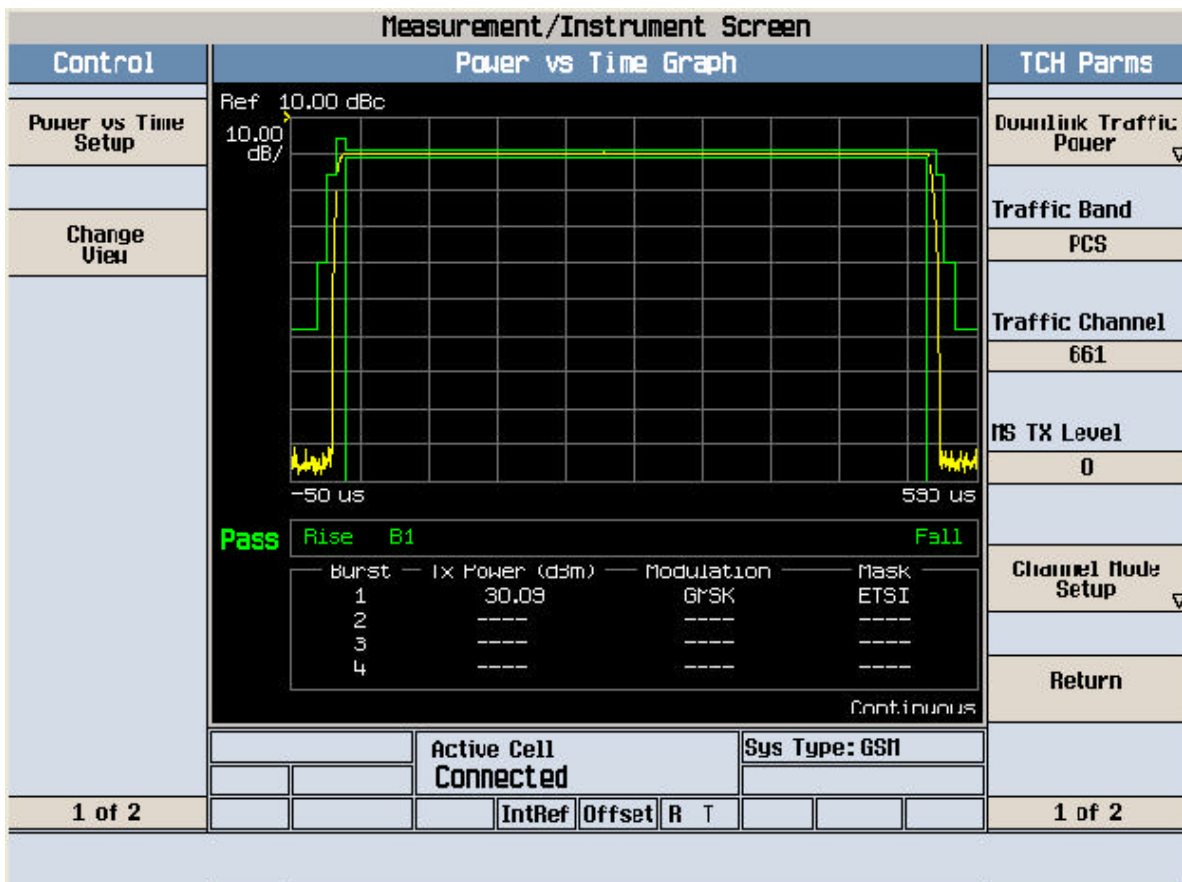
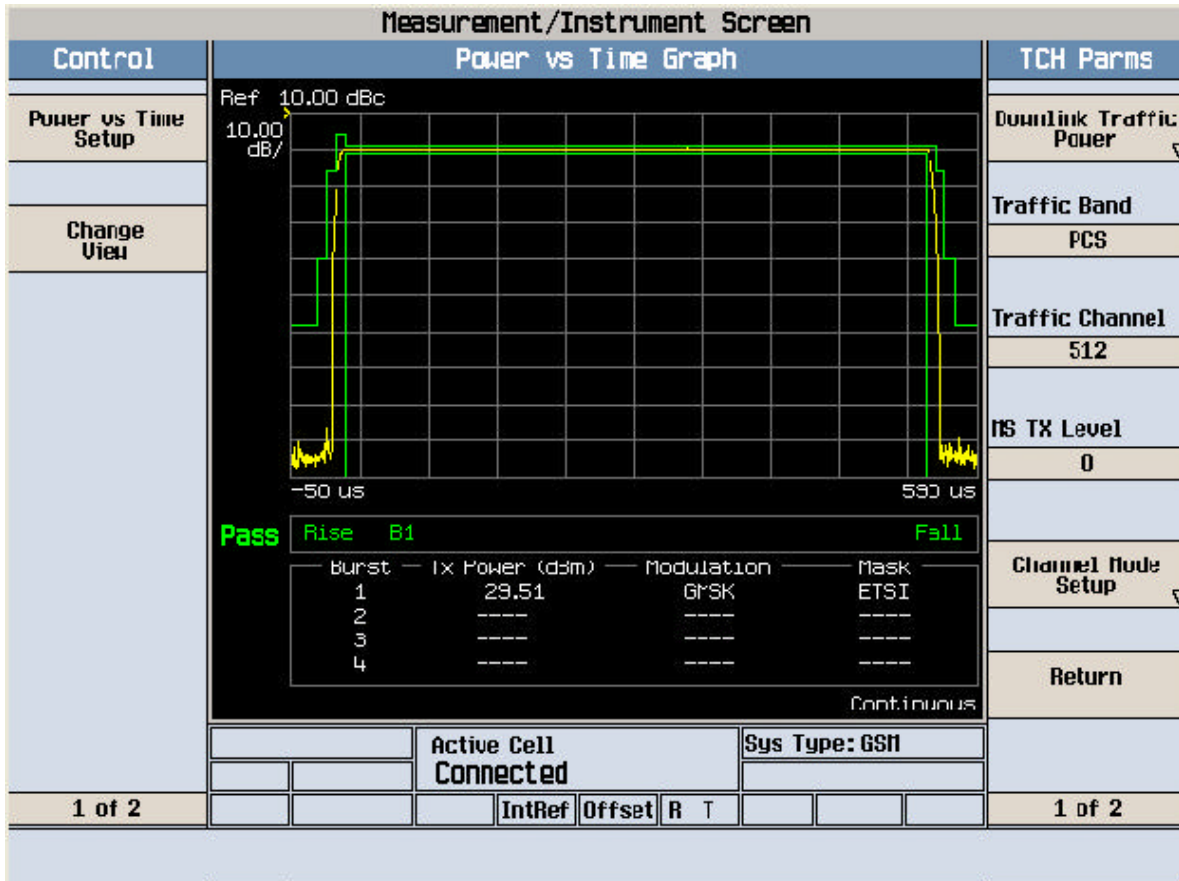


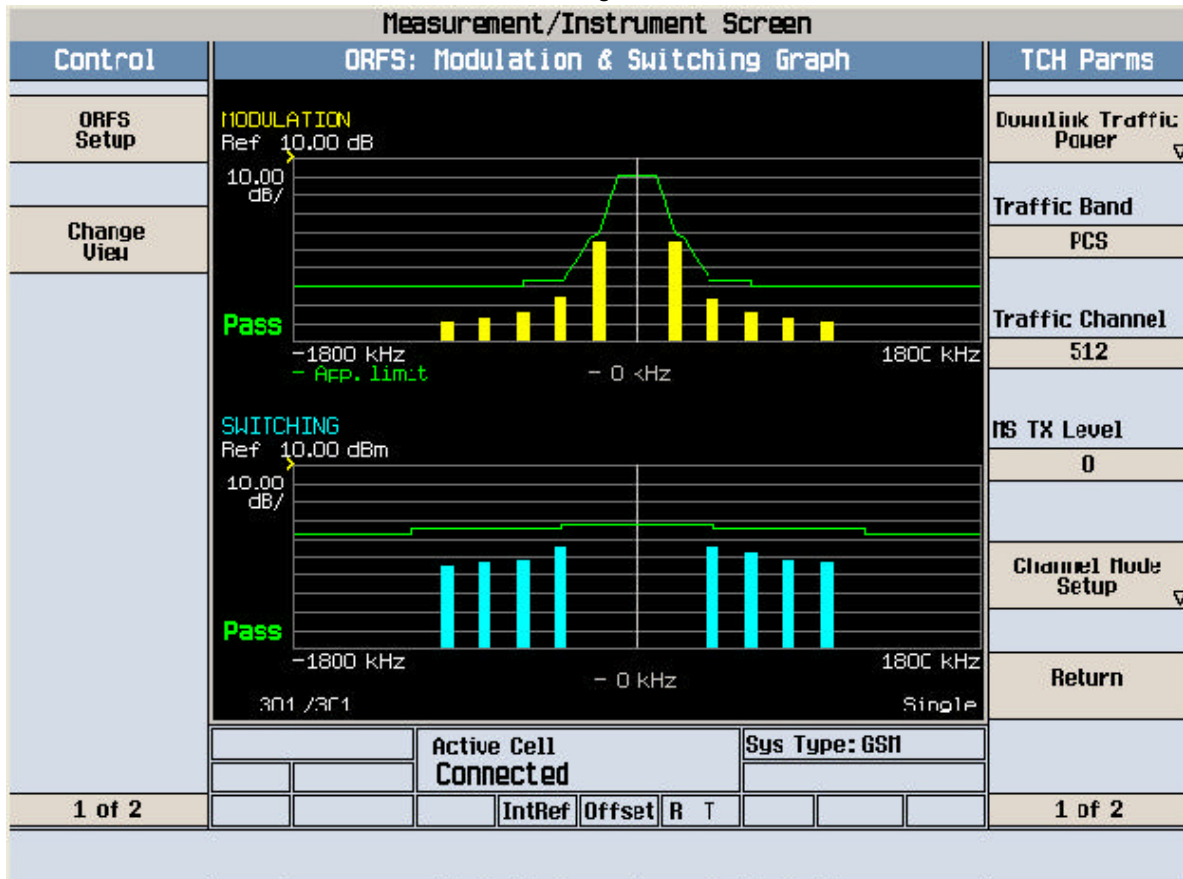
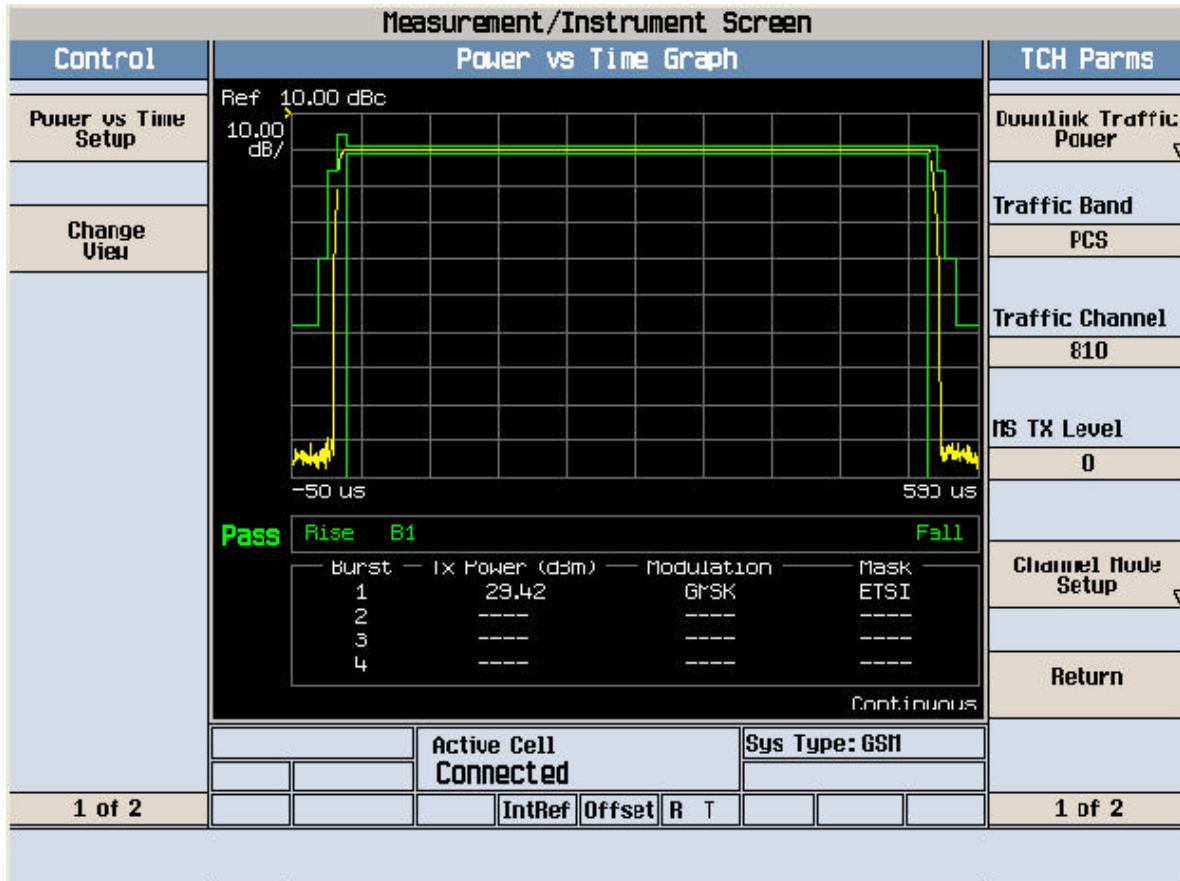


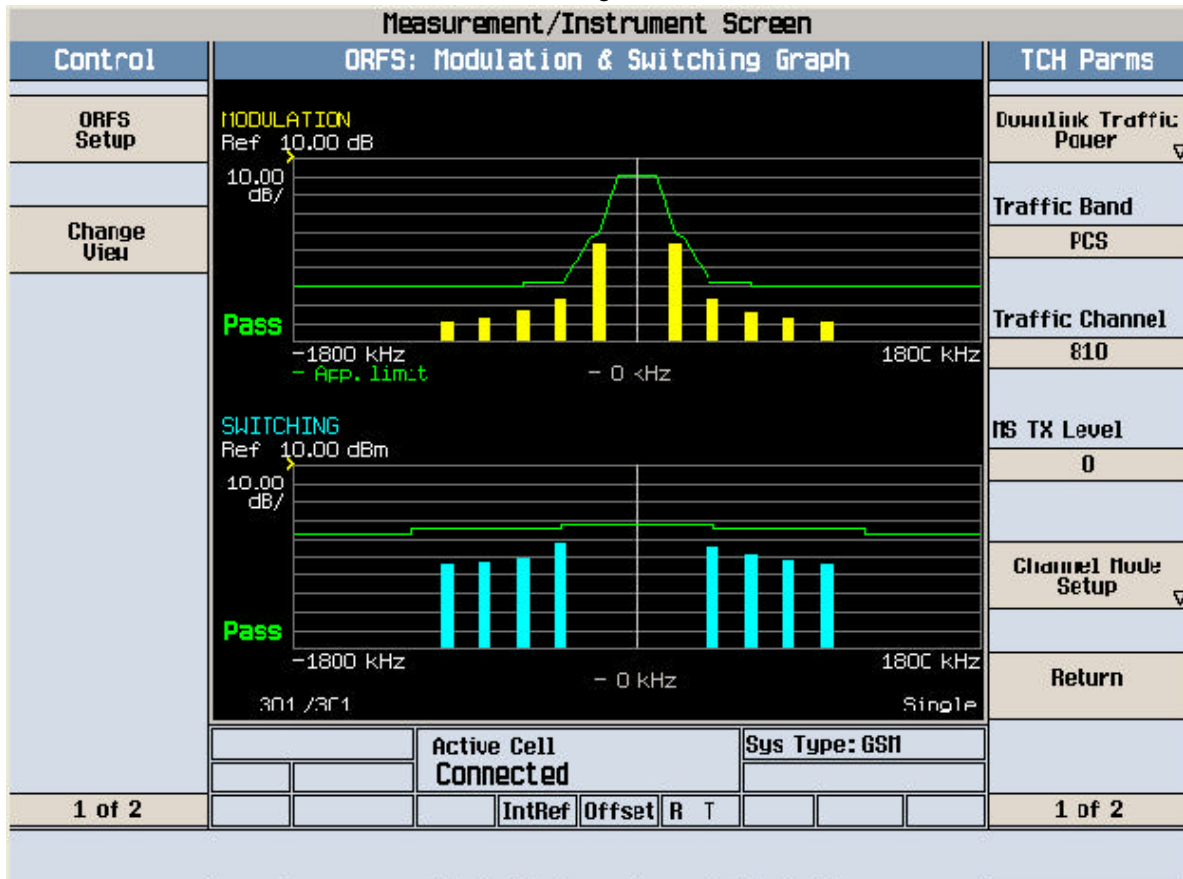
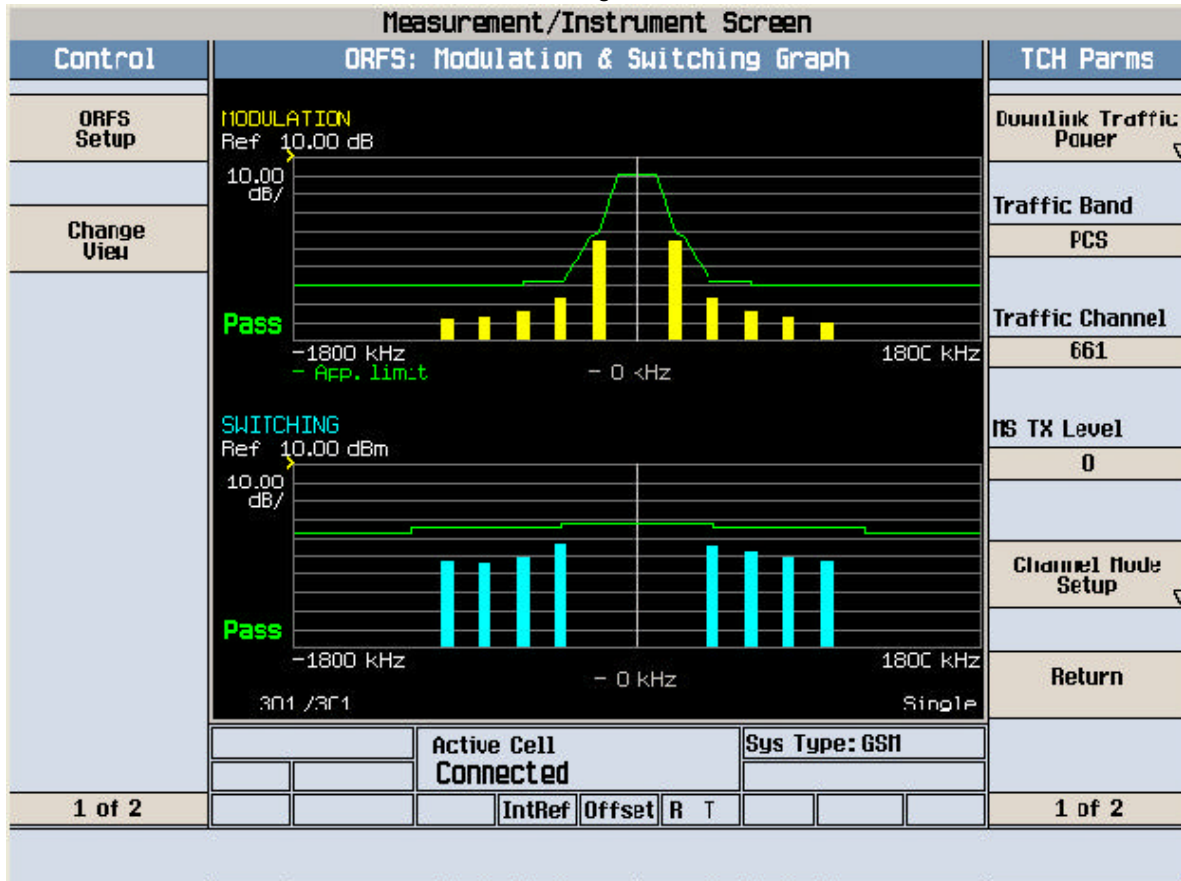


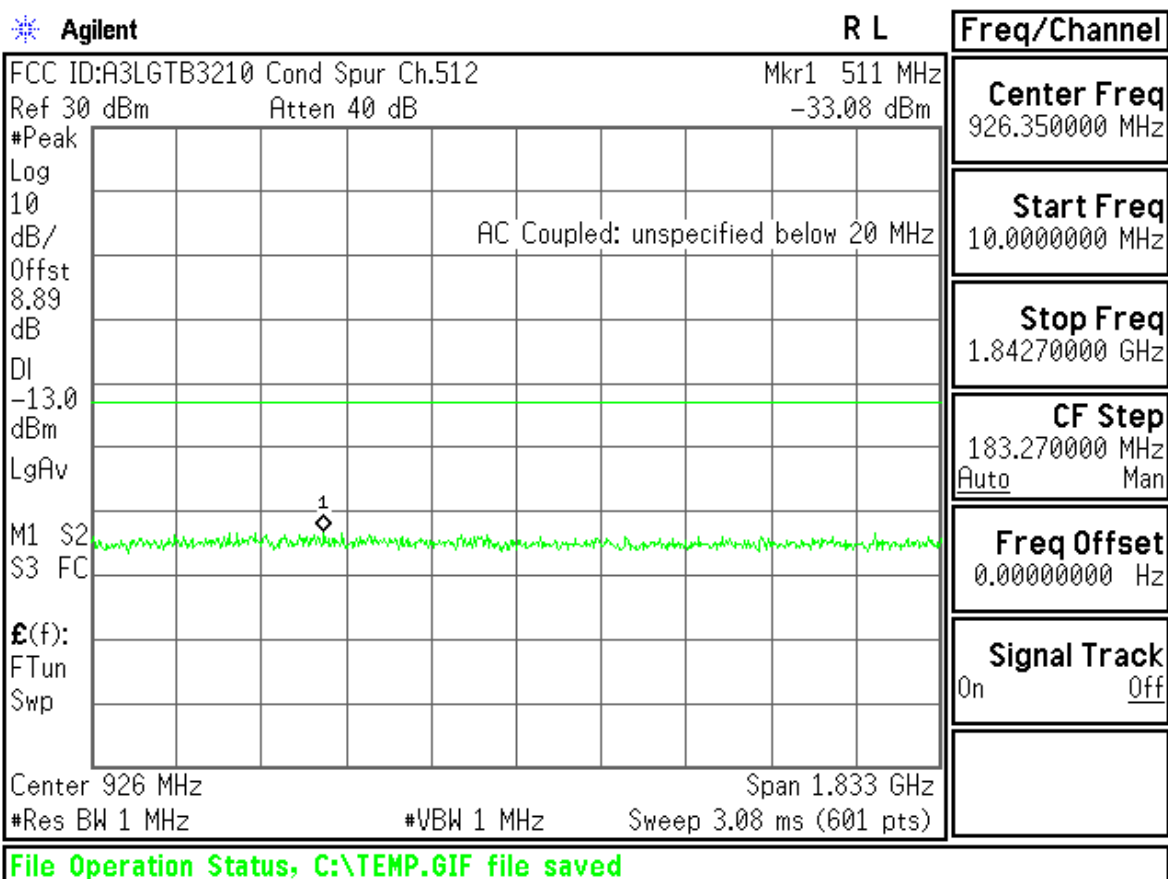
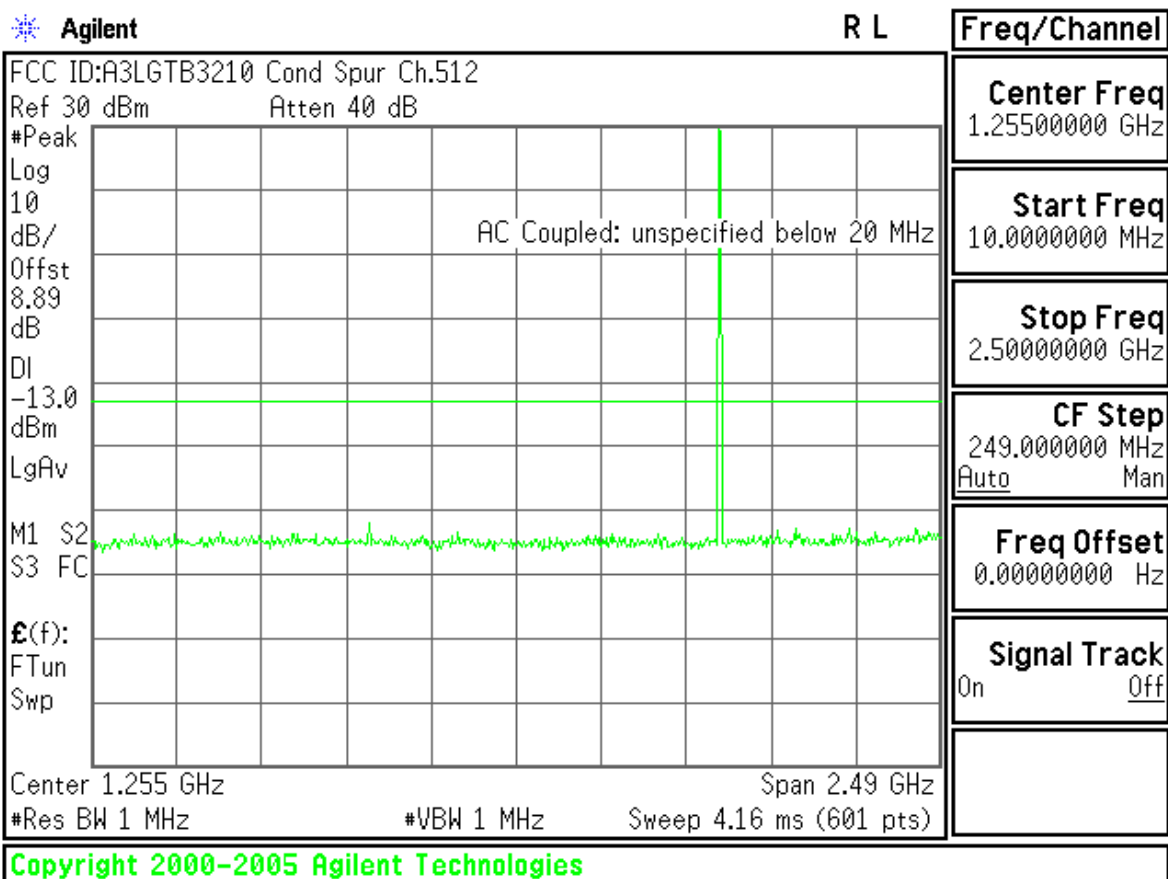


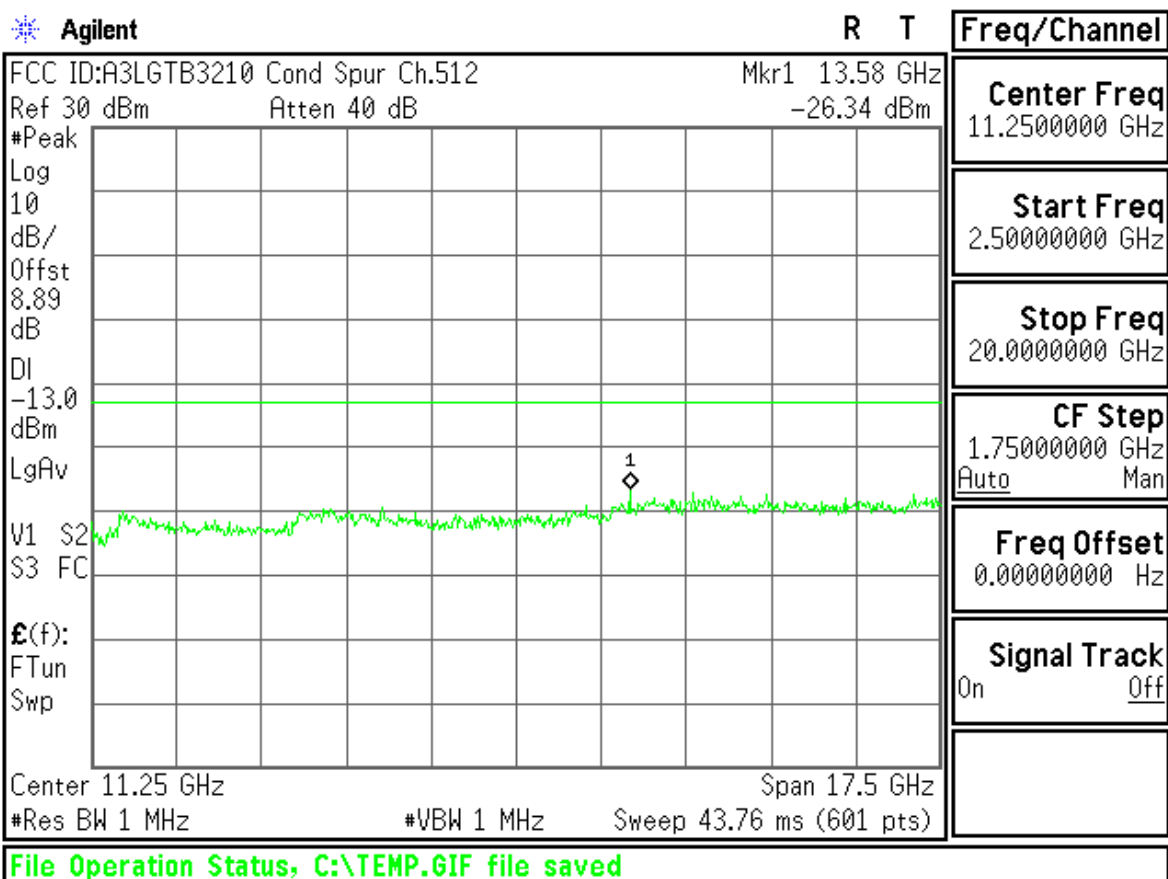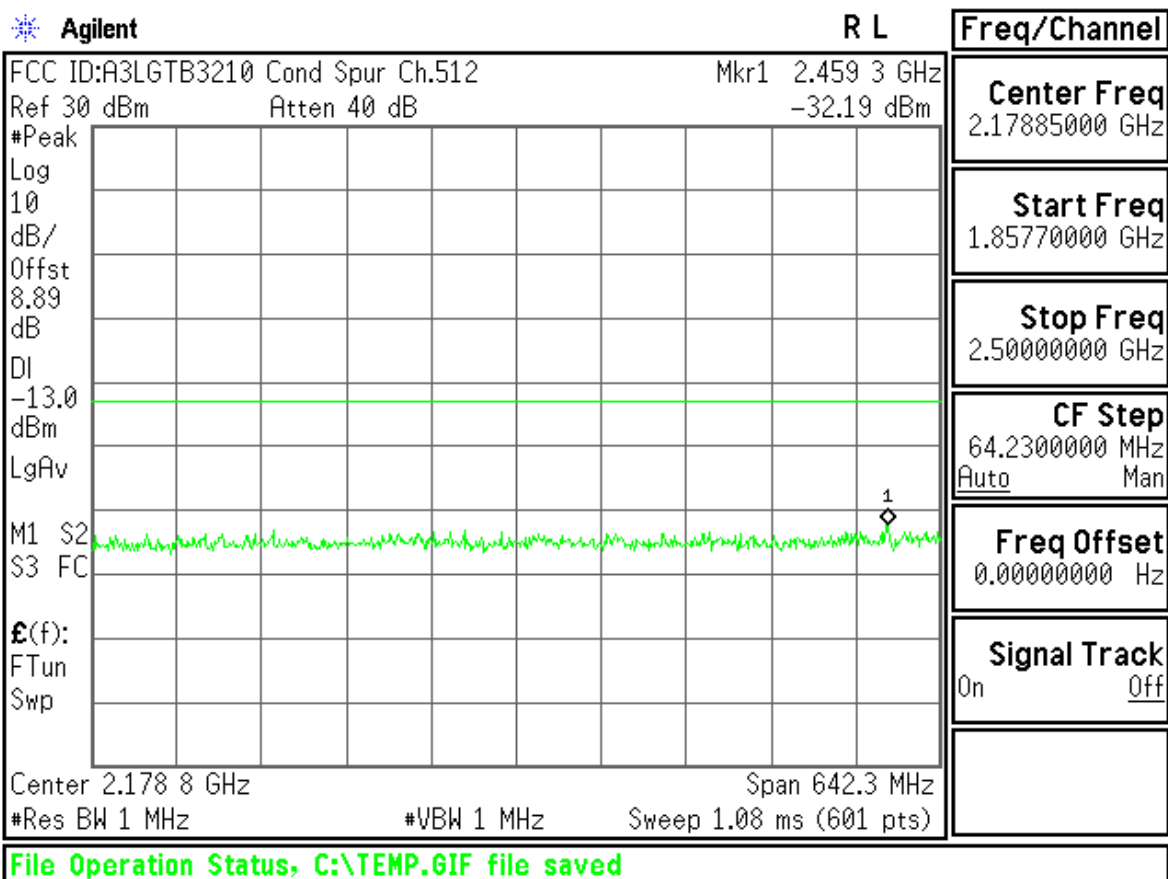

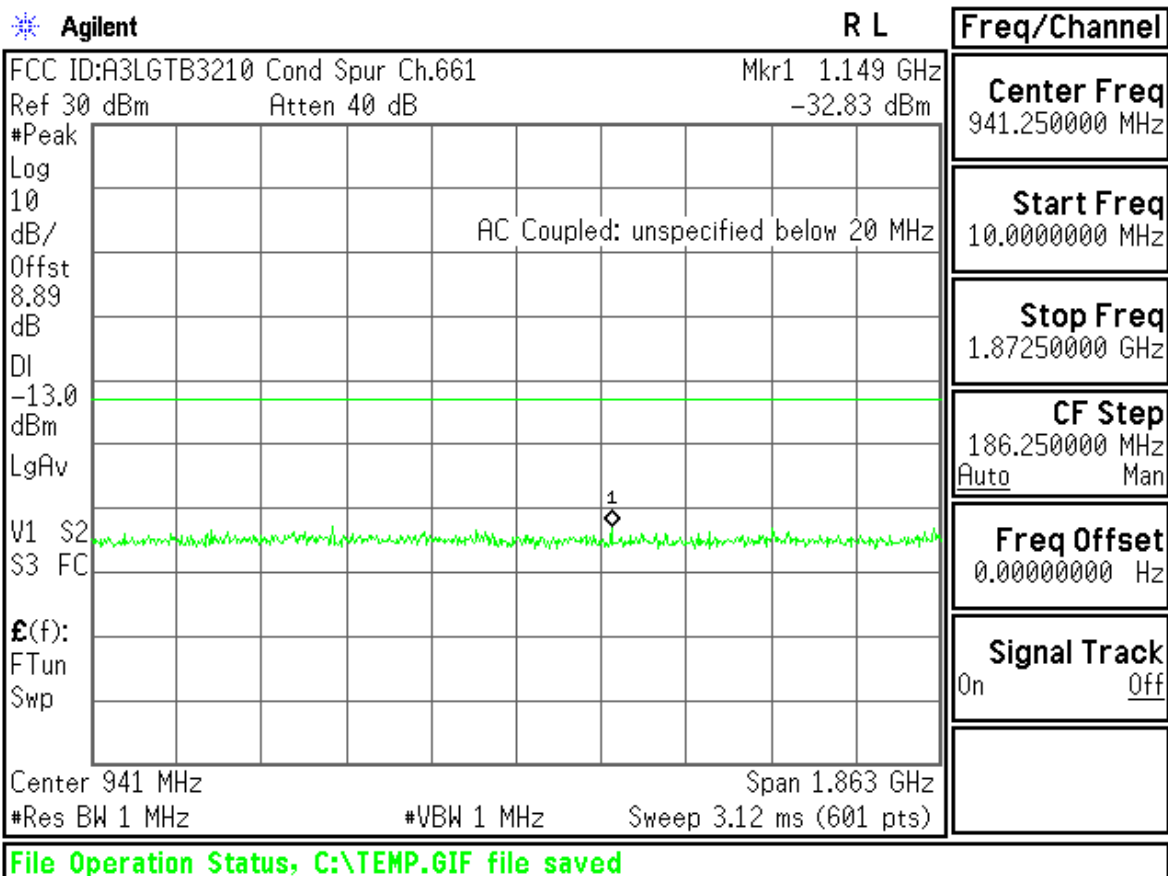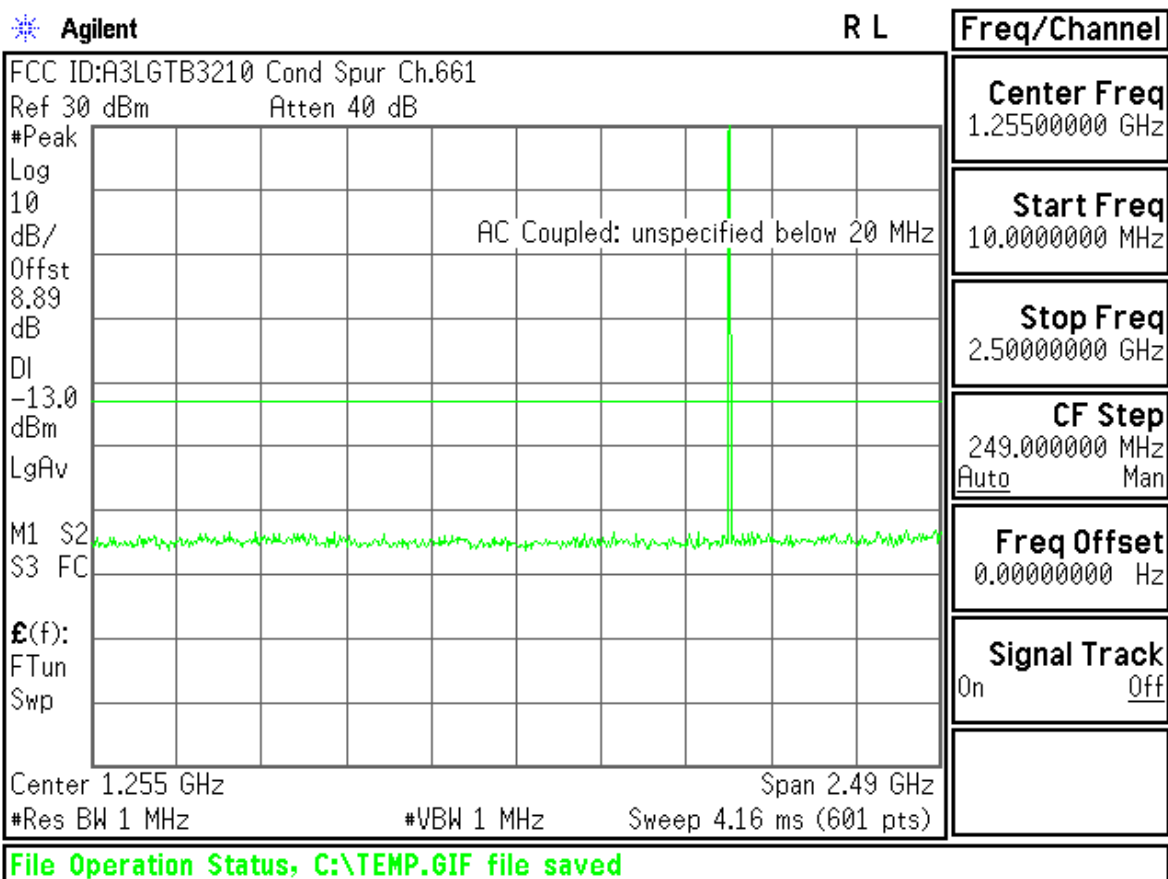

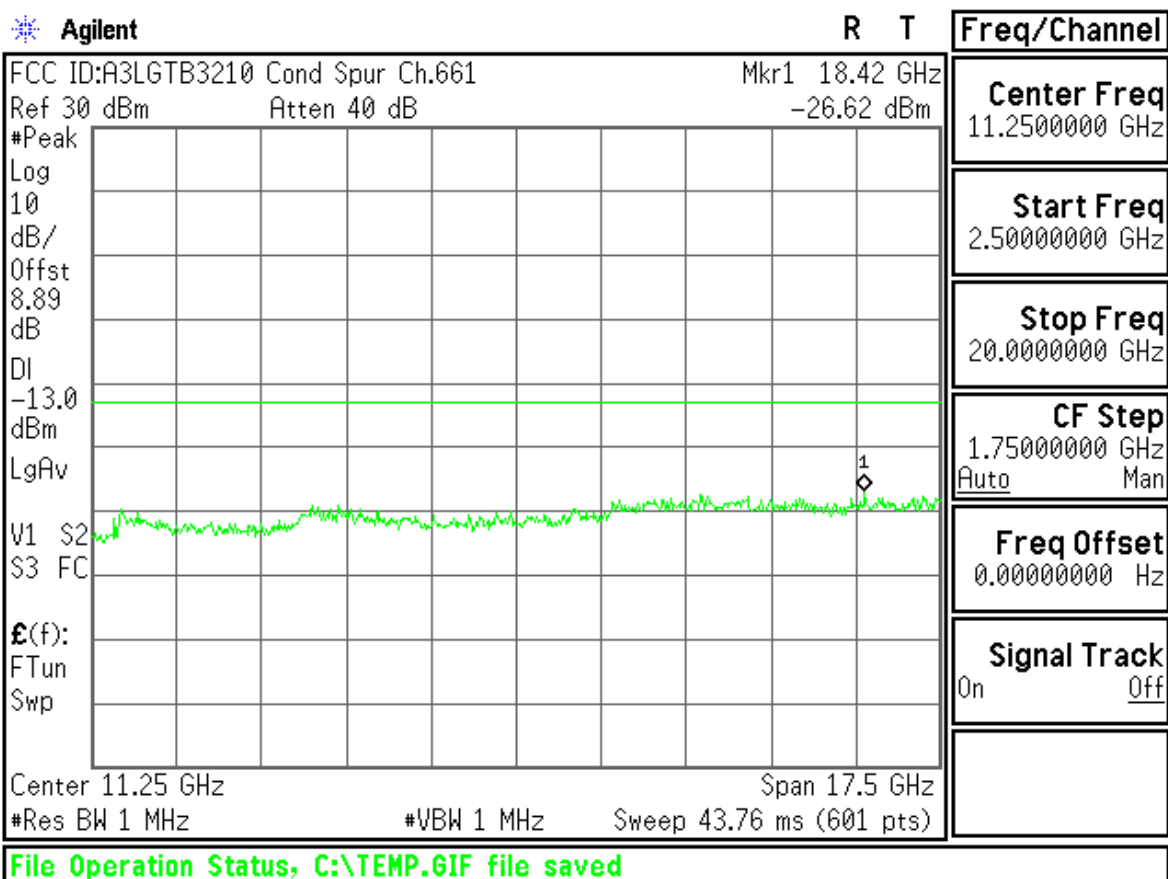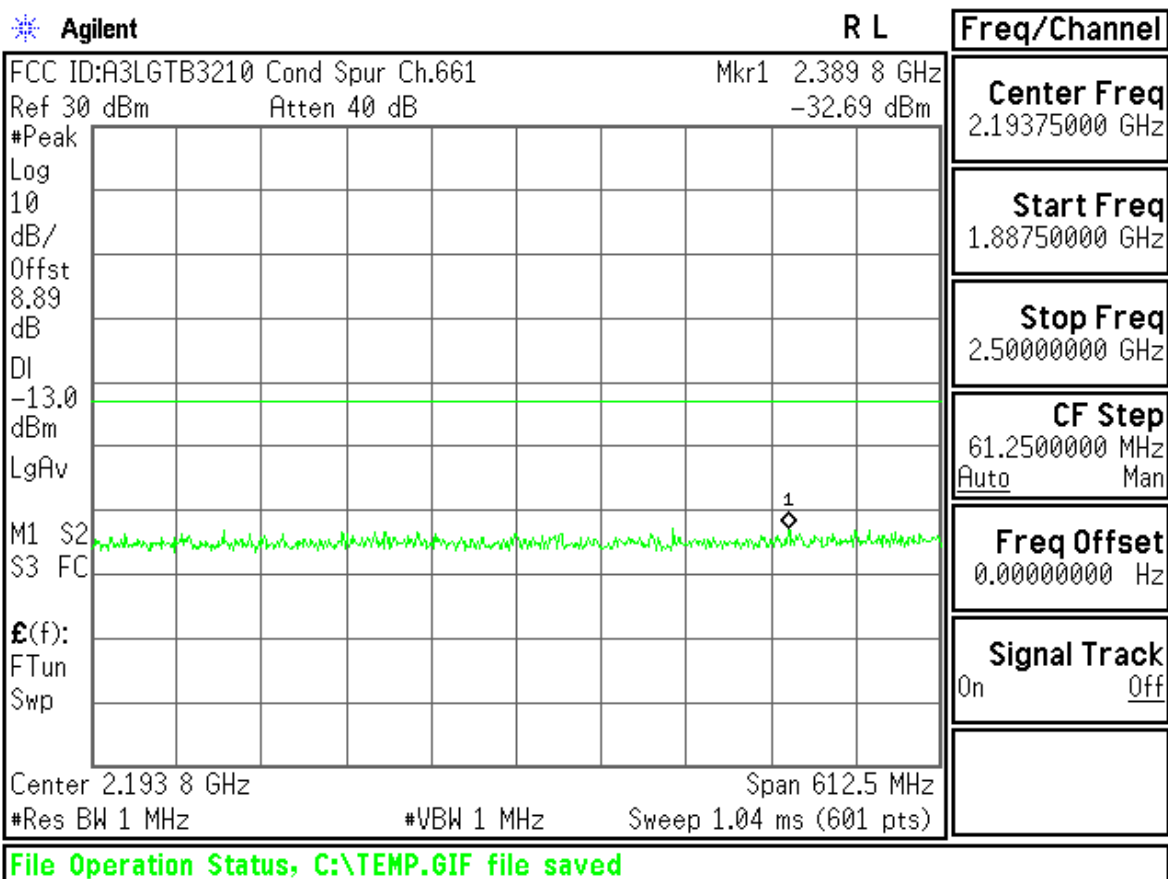

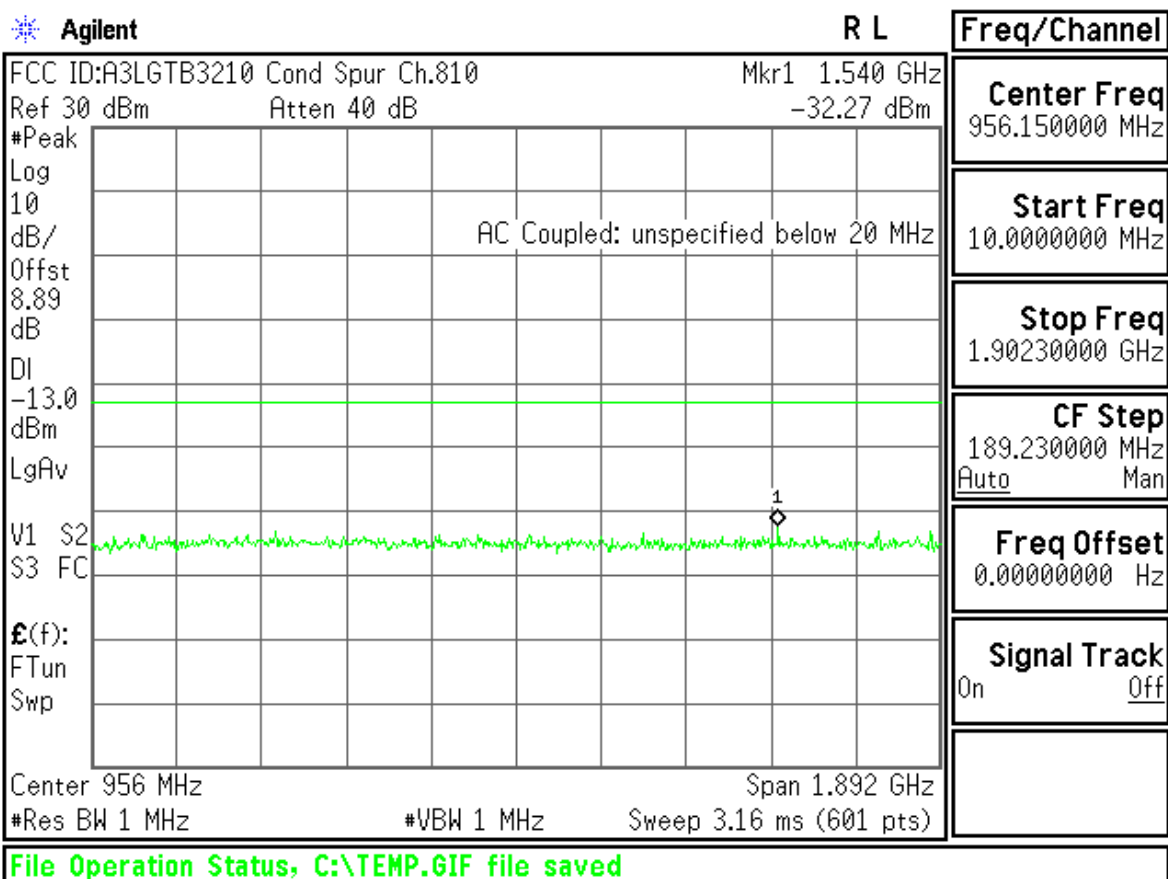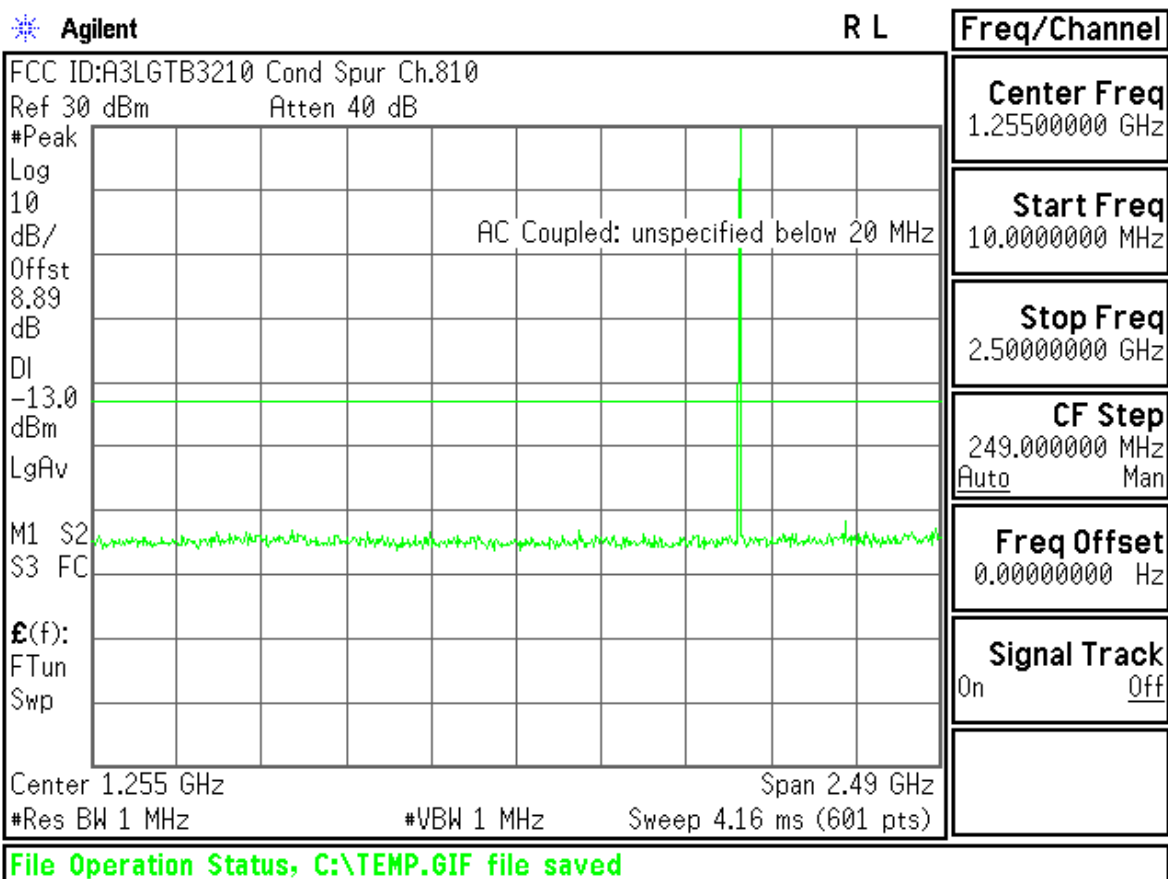

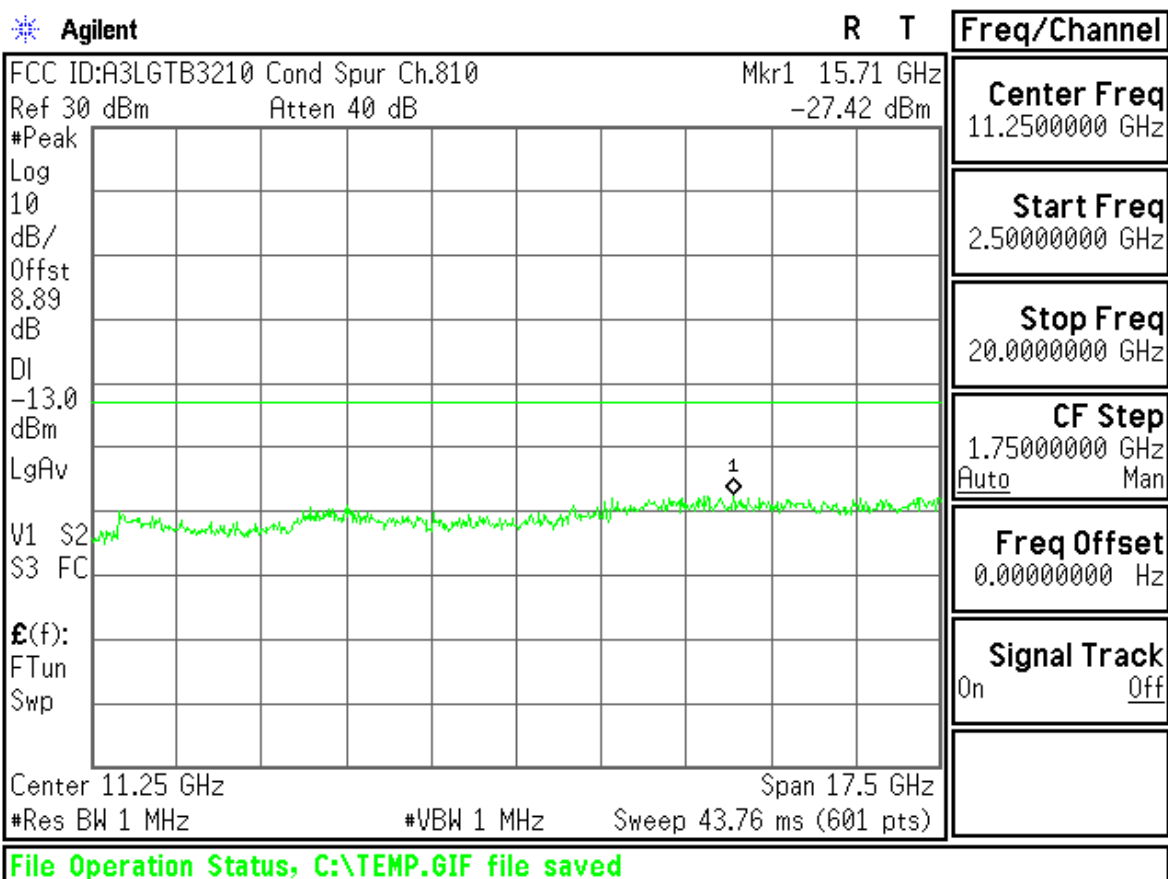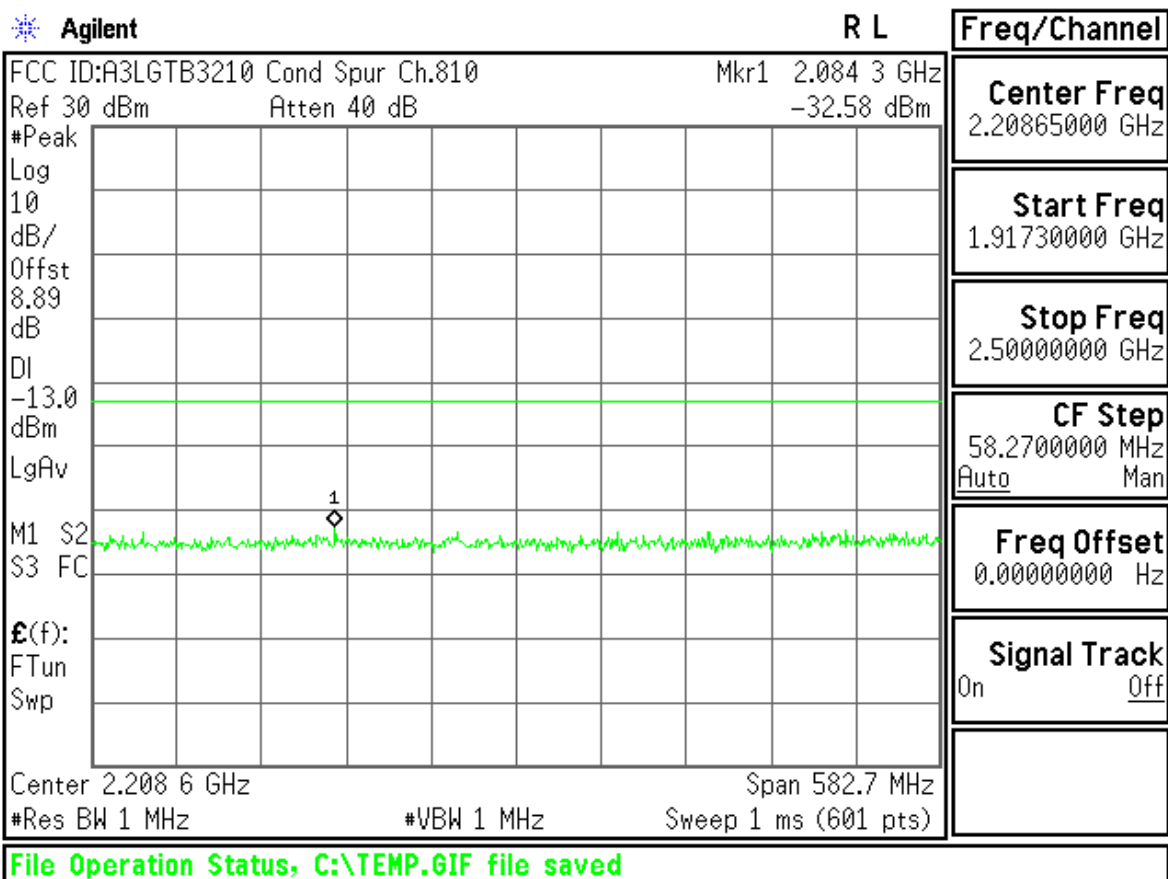

Agilent

R L

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.89

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

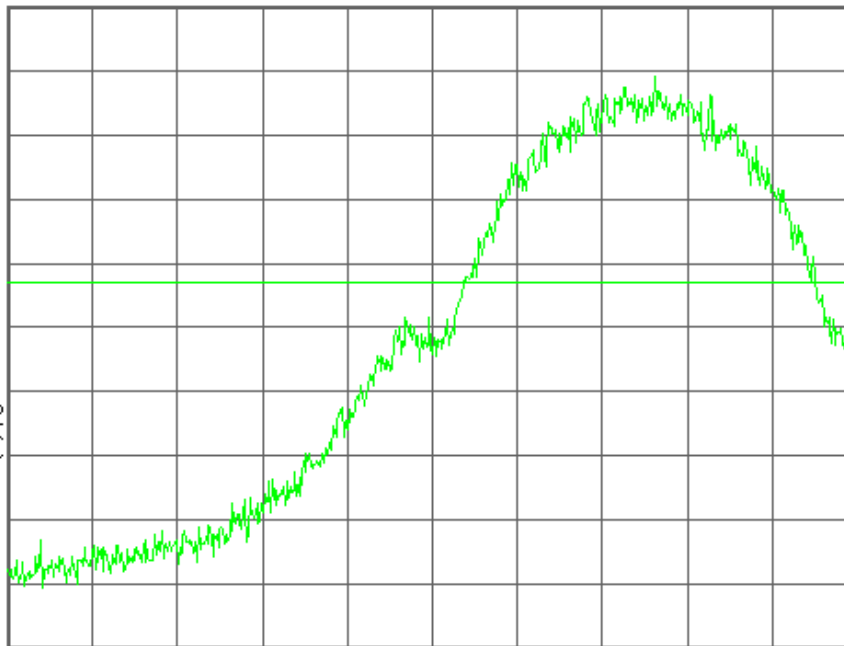

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.512

Mkr1 1.849 981 3 GHz

Ref 30 dBm

Atten 40 dB

-19.03 dBm

#Avg

Log

10

dB/

Offst

8.89

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

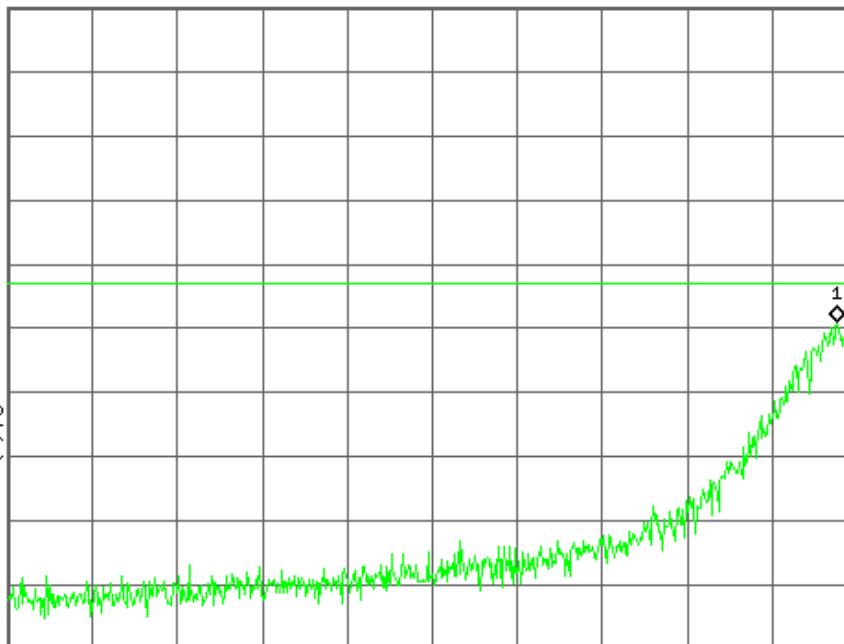

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.89

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

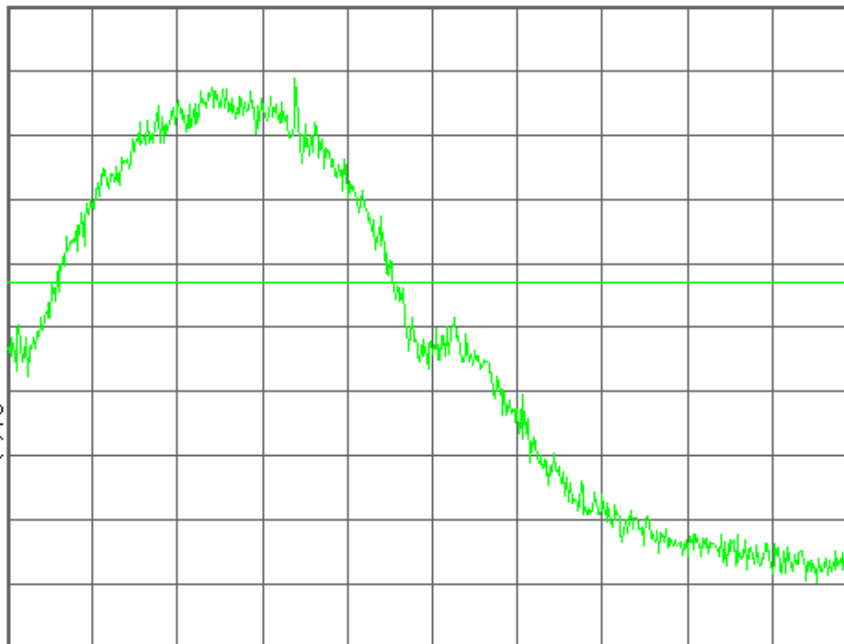

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTB3210 Band Edge Ch.810

Mkr1 1.910 016 2 GHz

Ref 30 dBm

Atten 40 dB

-18.33 dBm

#Avg

Log

10

dB/

Offst

8.89

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

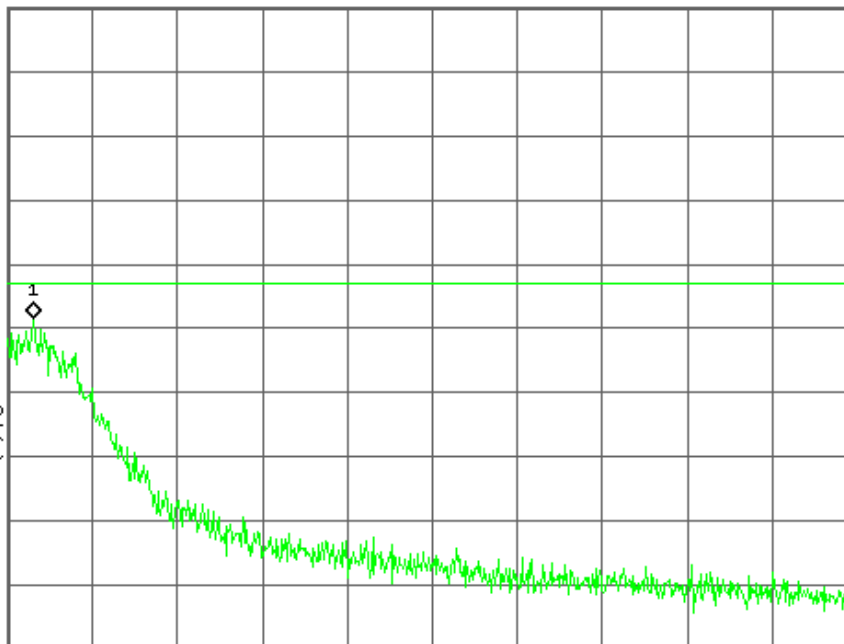

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz


Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

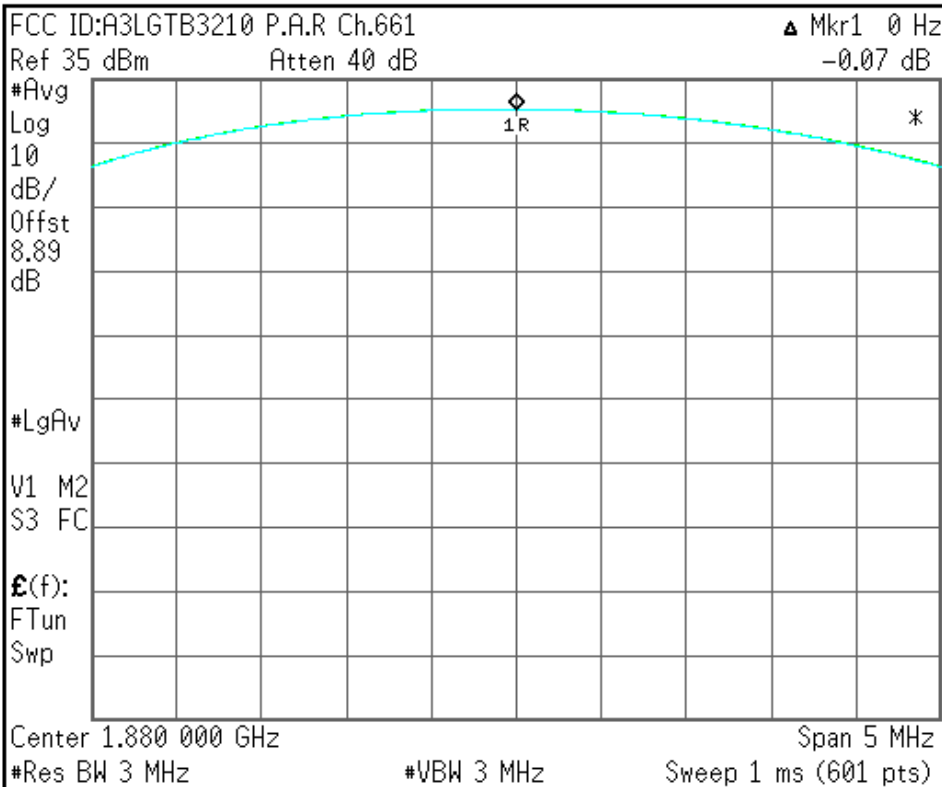

Center Freq
1.88000000 GHz
Start Freq
1.87750000 GHz
Stop Freq
1.88250000 GHz
CF Step
500.000000 kHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved