



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-C3300i
FCC ID (Requested) : A3LGTC3300I
Report No : FH-278-R1
Job No : FH-278
Date issued : January 6, 2011

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS.....	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA	14
6.1. Effective Radiated Power (E.R.P.).....	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)	15
6.3. GSM850 Radiated Spurious & Harmonic measurement.....	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability.....	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph.....	21
6.7.3. GSM1900 Frequency Stability Table	23
6.7.4. GSM1900 Frequency Stability Graph.....	24
7. CONCLUSION.....	26
8. TEST PLOTS.....	27

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTC3300I
- Model : GT-C3300i
- Quantity : Quantity production is planned
- Emission Designators : 248KGXW(GSM850)
251KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.292 W ERP GSM850 (24.66 dBm)
0.348 W EIRP GSM1900 (25.41 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx
Only
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : December 24-27, 2010
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FH-278-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2011-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2011-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2011-04-13
Network Analyzer	8753E	JP38160590	2011-06-18
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2011-03-08
	8960	GB42360886	2011-08-06
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
	HF906	360306/011	2012-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	3121C-DB4	9007-587	2011-04-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2011-06-17
	E3640A	MY40003595	2011-05-17
	E3632A	MY40022438	2011-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

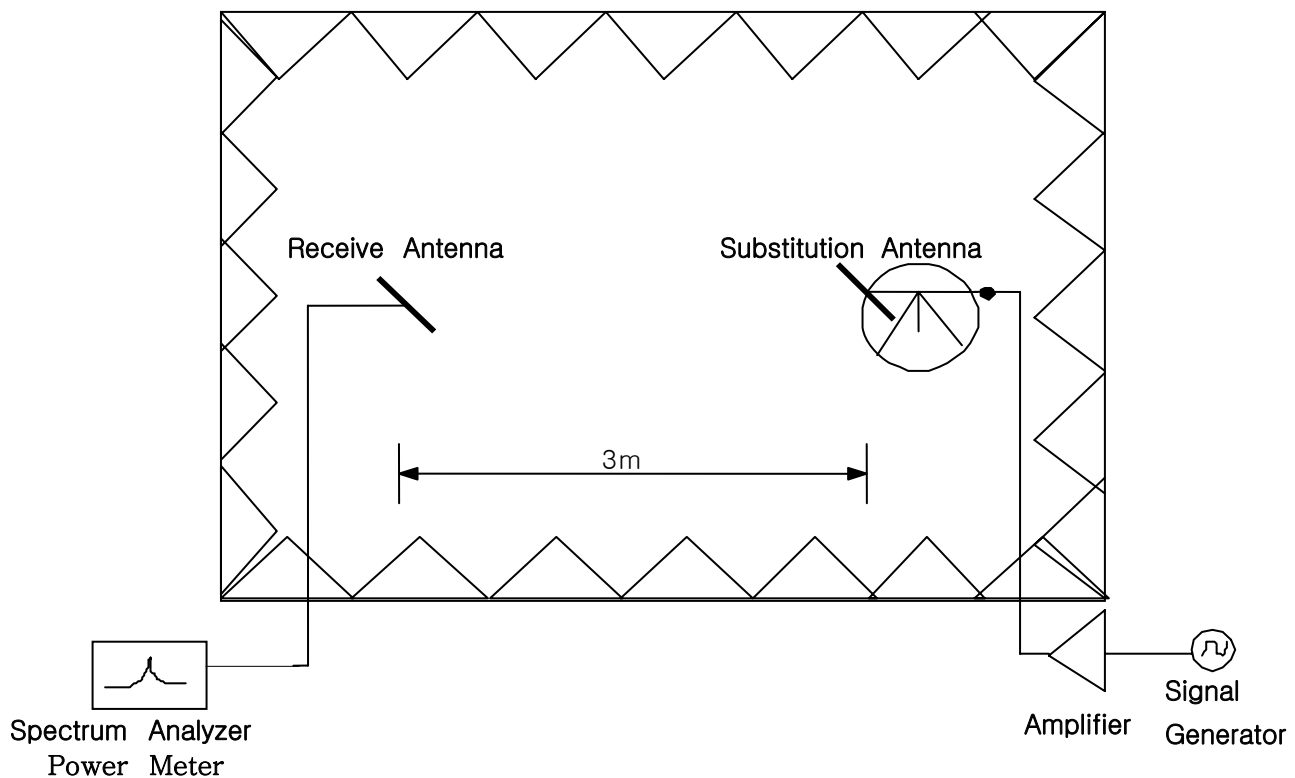


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

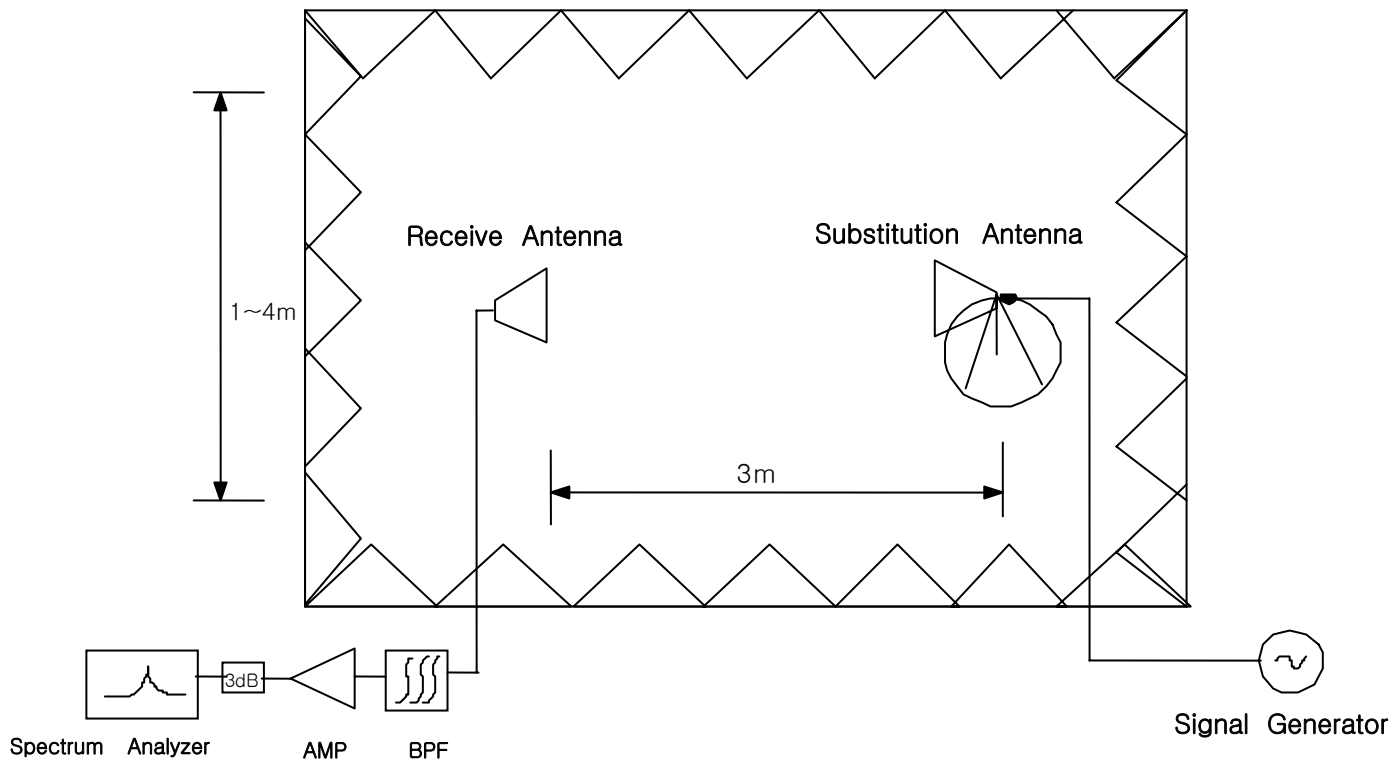


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.292 \text{ W}) = 37.65 \text{ dB}$$

$$24.66 \text{ dBm} - 37.65 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1.Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	20.00	H	-16.55	-0.67	-15.88
		V	-17.39	-0.67	-16.72
836.60	22.00	H	-15.09	-0.73	-14.36
		V	-15.30	-0.73	-14.57
848.80	25.00	H	-14.19	-0.79	-13.40
		V	-13.40	-0.79	-12.61

■Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-16.16	H	286/125	19.72	0.094	Standard
836.60	-13.90	H	288/80	22.46	0.176	Standard
848.80	-13.74	H	282/70	24.66	0.292	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	25.00	H	-14.32	9.60	-23.92
		V	-13.91	9.60	-23.51
1880.00	24.00	H	-14.99	9.60	-24.59
		V	-15.28	9.60	-24.88
1909.80	23.00	H	-16.41	9.60	-26.01
		V	-16.21	9.60	-25.81

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-23.51	H	118/0	25.41	0.348	Standard
1880.00	-24.45	V	49/90	24.43	0.277	Standard
1909.80	-25.67	H	123/0	23.34	0.216	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 24.66 dBm = 0.292 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 37.65 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-67.49	V	79.91
	3	2472.60	-62.83	V	70.63
	4	3296.80	-65.88	H	69.67
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-67.39	H	79.03
	3	2509.80	-62.77	V	70.32
	4	3346.40	-66.03	H	69.55
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-62.99	H	73.59
	3	2546.40	-64.06	V	71.27
	4	3395.20	-67.07	H	70.56
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 25.41 dBm = 0.348 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 38.42$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-62.47	H	63.46
	3	5550.60	-55.33	H	51.31
	4	7400.80	-62.76	H	53.47
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-61.89	H	62.37
	3	5640.00	-55.45	V	51.13
	4	7520.00	-61.65	H	52.87
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-61.00	H	61.17
	3	5729.40	-54.79	V	50.31
	4	7639.20	-60.67	H	51.66
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : December 27, 2010

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.34	9.50	-13.20	-27.60	-27.25	-67.71	-67.49	79.91	80.04
	3	2472.60	-11.66	10.70	-12.00	-32.50	-32.00	-64.75	-62.83	72.05	70.63
	4	3296.80	-13.53	12.30	-11.80	-36.01	-35.61	-65.88	-66.37	69.67	70.56
	5	4121.00	-15.09	12.50	-10.40	-38.76	-38.44	-	-	-	-
	6	4945.20	-16.89	12.70	-8.80	-41.87	-40.99	-	-	-	-
	7	5769.40	-18.42	12.90	-7.50	-43.37	-43.42	-	-	-	-
190	2	1673.20	-9.39	9.50	-13.10	-28.11	-28.27	-67.39	-67.50	79.08	79.03
	3	2509.80	-11.68	10.70	-12.00	-32.67	-32.25	-63.35	-62.77	70.48	70.32
	4	3346.40	-13.62	12.30	-11.70	-36.28	-36.70	-66.03	-67.02	69.55	70.12
	5	4183.00	-15.33	12.50	-10.20	-38.60	-38.48	-	-	-	-
	6	5019.60	-17.17	12.70	-8.50	-42.15	-41.72	-	-	-	-
	7	5856.20	-18.51	12.90	-7.40	-44.68	-44.47	-	-	-	-
251	2	1697.60	-9.42	9.50	-13.10	-29.20	-28.39	-62.99	-64.55	73.59	75.96
	3	2546.40	-11.69	10.70	-12.00	-32.66	-32.59	-64.97	-64.06	72.11	71.27
	4	3395.20	-13.58	12.30	-11.70	-36.31	-35.95	-67.07	-67.21	70.56	71.06
	5	4244.00	-15.43	12.50	-10.10	-39.14	-39.12	-	-	-	-
	6	5092.80	-17.20	12.70	-8.50	-42.76	-42.76	-	-	-	-
	7	5941.60	-18.66	12.90	-7.20	-44.34	-44.02	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : December 27, 2010

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.27	12.40	-11.10	-37.42	-37.29	-62.47	-62.66	63.46	63.78
	3	5550.60	-17.89	12.90	-8.00	-42.43	-42.51	-55.33	-56.86	51.31	52.76
	4	7400.80	-20.68	10.50	-2.80	-47.70	-47.31	-62.76	-62.94	53.47	54.04
	5	9251.00	-24.00	11.20	-0.20	-51.55	-50.34	-	-	-	-
	6	11101.20	-27.10	11.60	2.50	-55.14	-55.44	-	-	-	-
	7	12951.40	-29.17	12.90	3.30	-58.61	-58.58	-	-	-	-
661	2	3760.00	-14.42	12.40	-11.00	-37.93	-37.89	-61.89	-61.97	62.37	62.49
	3	5640.00	-18.03	12.90	-7.90	-42.58	-42.73	-56.88	-55.45	52.71	51.13
	4	7520.00	-20.87	10.60	-2.70	-47.19	-47.22	-61.65	-62.29	52.87	53.48
	5	9400.00	-23.58	11.60	-1.00	-51.70	-51.98	-	-	-	-
	6	11280.00	-26.58	12.10	1.50	-55.95	-56.35	-	-	-	-
	7	13160.00	-28.58	12.80	2.80	-58.92	-59.14	-	-	-	-
810	2	3819.60	-14.46	12.40	-10.90	-38.24	-38.04	-61.00	-61.75	61.17	62.12
	3	5729.40	-18.26	13.00	-7.70	-43.05	-42.89	-58.73	-54.79	54.09	50.31
	4	7639.20	-21.26	11.20	-2.90	-47.42	-47.53	-60.67	-62.02	51.66	52.90
	5	9549.00	-23.84	11.70	-0.90	-52.67	-51.88	-	-	-	-
	6	11458.80	-27.12	11.70	2.40	-56.20	-55.97	-	-	-	-
	7	13368.60	-28.83	12.30	3.50	-60.16	-59.86	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-8.40	836,599,992	-0.000001	-0.010
100%		-30	-16.60	836,599,983	-0.000002	-0.020
100%		-20	29.10	836,600,029	0.000003	0.035
100%		-10	20.70	836,600,021	0.000002	0.025
100%		0	-25.90	836,599,974	-0.000003	-0.031
100%		+10	-20.30	836,599,980	-0.000002	-0.024
100%		+20	-8.40	836,599,992	-0.000001	-0.010
100%		+30	-31.00	836,599,969	-0.000004	-0.037
100%		+40	-17.30	836,599,983	-0.000002	-0.021
100%		+50	-0.60	836,599,999	0.000000	-0.001
85%	3.35	+20	-28.30	836,599,972	-0.000003	-0.034
115%	4.26	+20	10.30	836,600,010	0.000001	0.012
Batt.Endpoint	3.35	+20	-28.30	836,599,972	-0.000003	-0.034


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

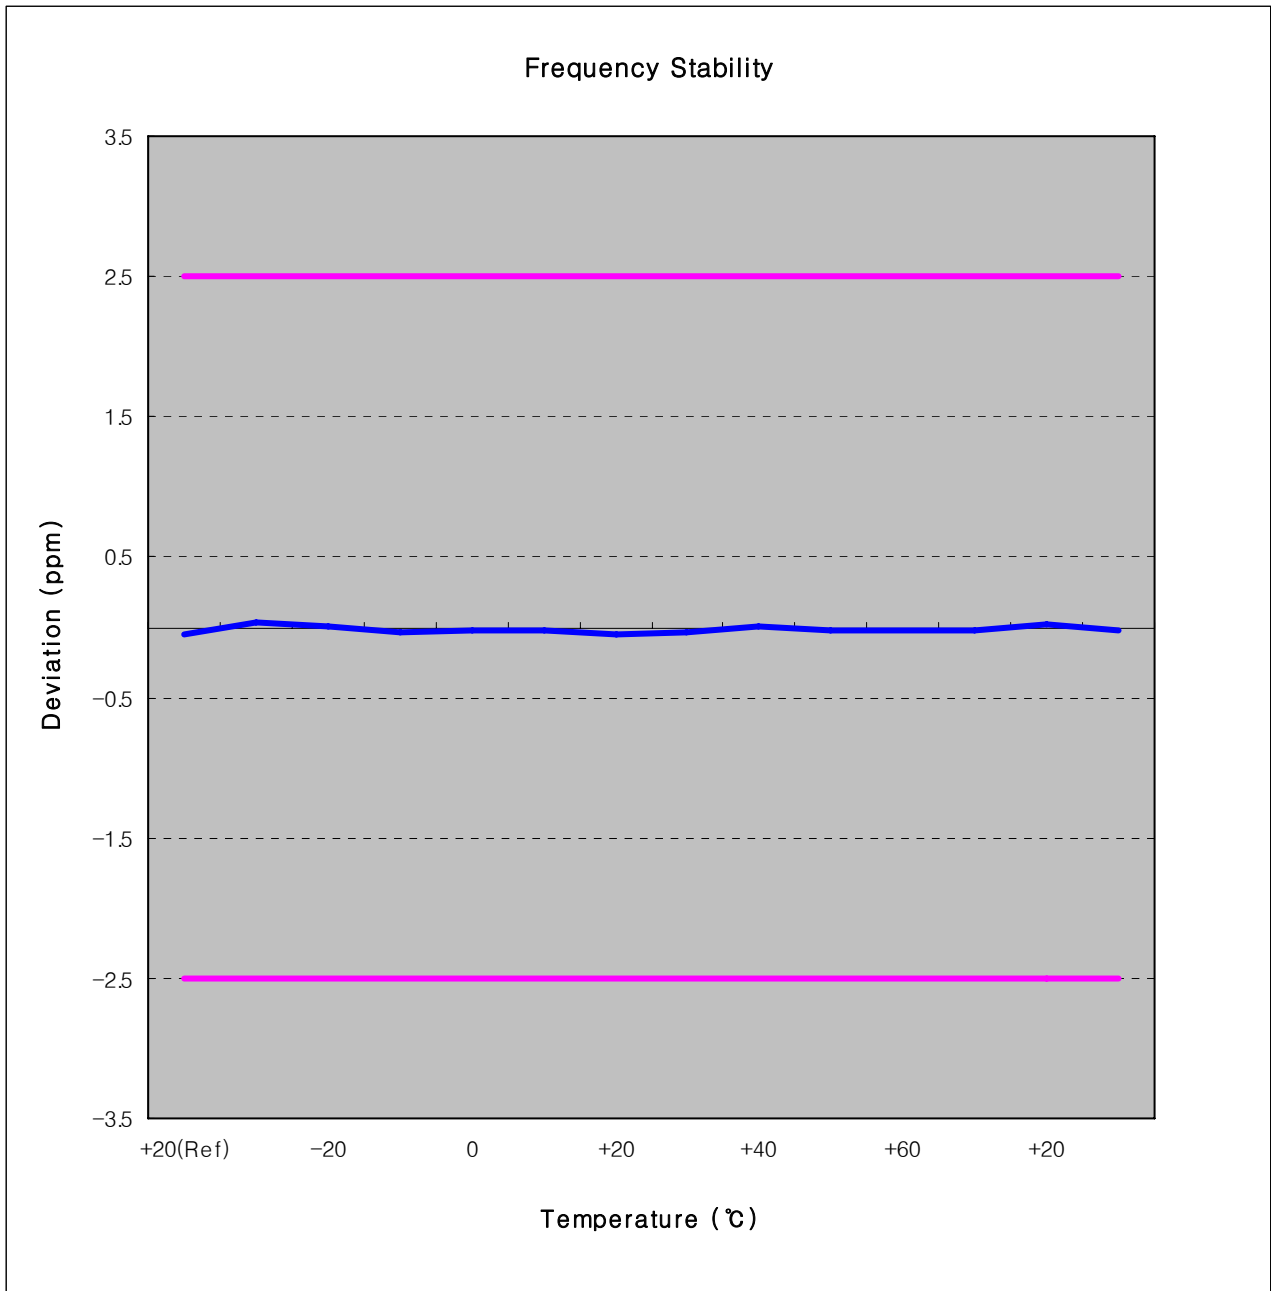

Zoom IN

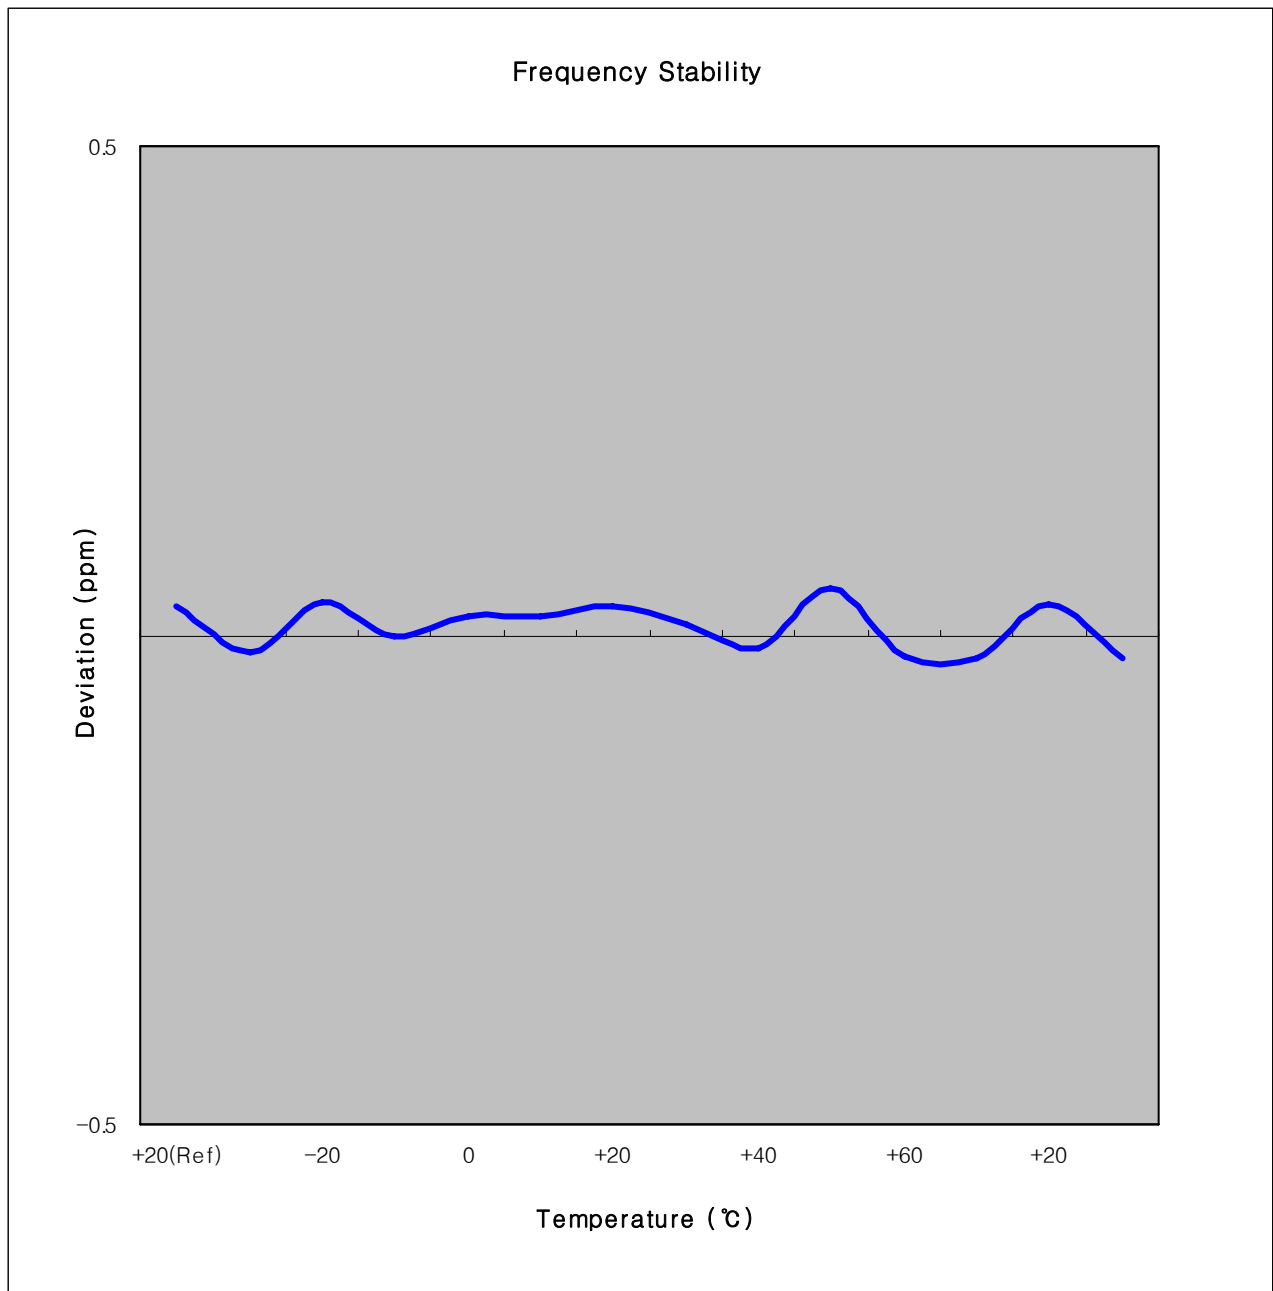

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-8.50	1,879,999,992	0.000000	-0.005
100%		-30	12.80	1,880,000,013	0.000001	0.007
100%		-20	-17.50	1,879,999,983	-0.000001	-0.009
100%		-10	11.50	1,880,000,012	0.000001	0.006
100%		0	19.10	1,880,000,019	0.000001	0.010
100%		+10	-38.70	1,879,999,961	-0.000002	-0.021
100%		+20	-8.50	1,879,999,992	0.000000	-0.005
100%		+30	-24.10	1,879,999,976	-0.000001	-0.013
100%		+40	39.30	1,880,000,039	0.000002	0.021
100%		+50	-19.80	1,879,999,980	-0.000001	-0.011
85%	3.35	+20	-16.60	1,879,999,983	-0.000001	-0.009
115%	4.26	+20	-31.30	1,879,999,969	-0.000002	-0.017
Batt.Endpoint	3.35	+20	-16.60	1,879,999,983	-0.000001	-0.009


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

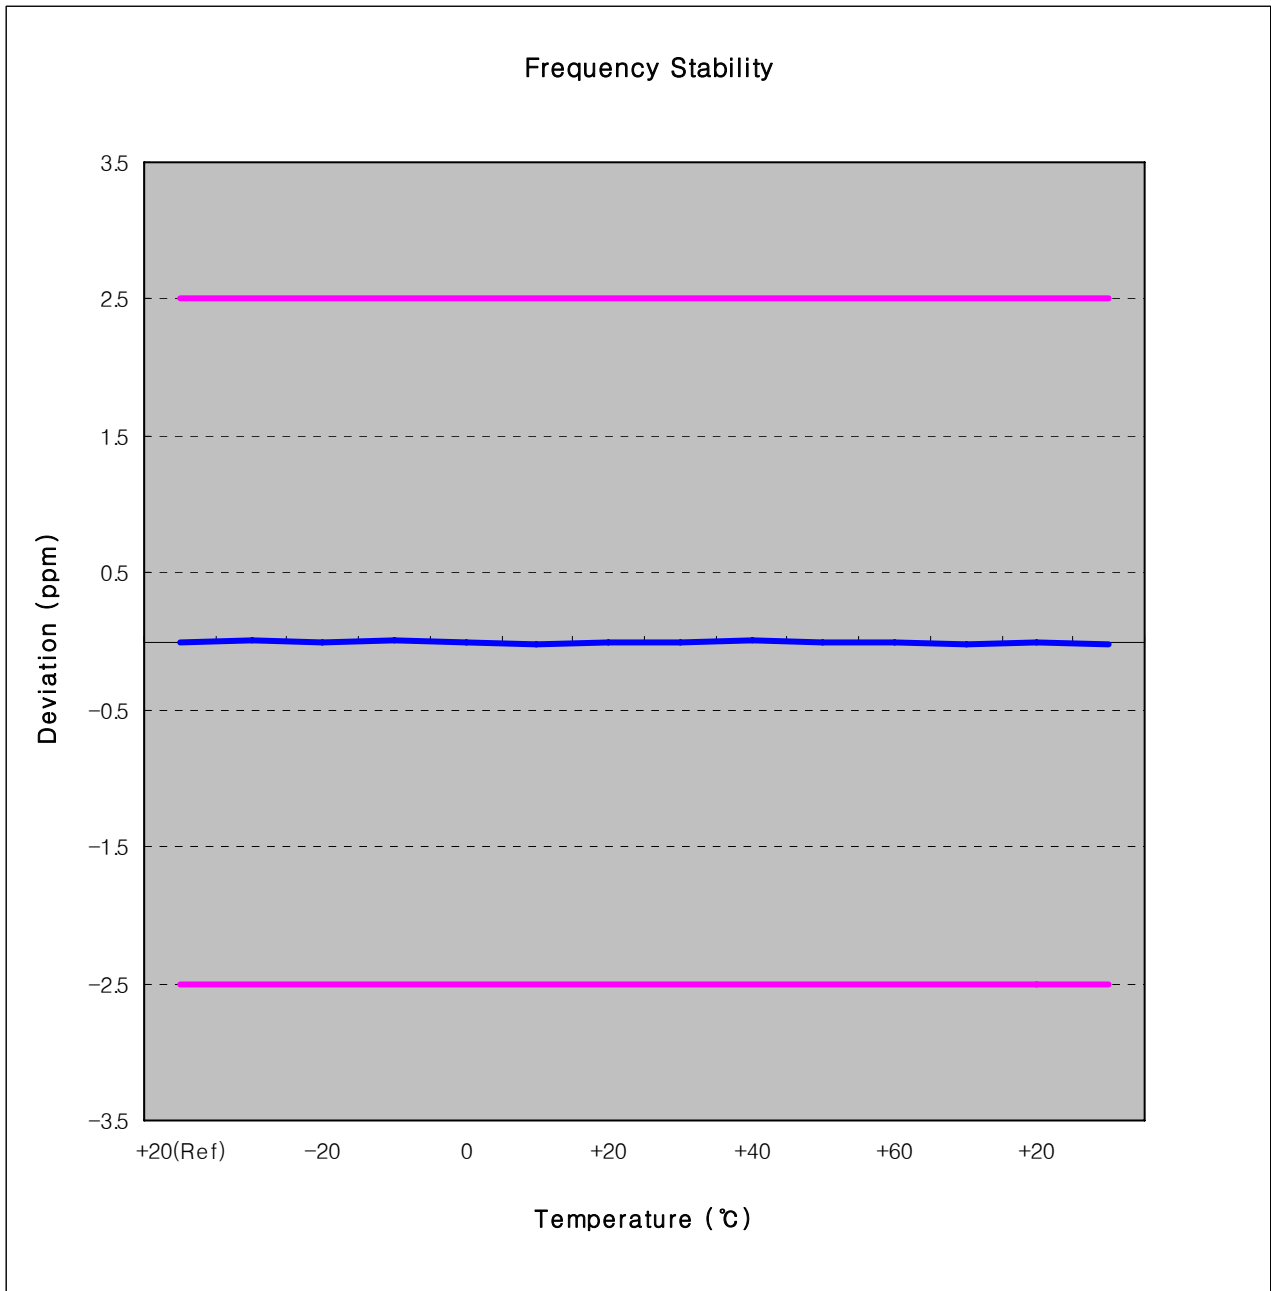

Zoom IN

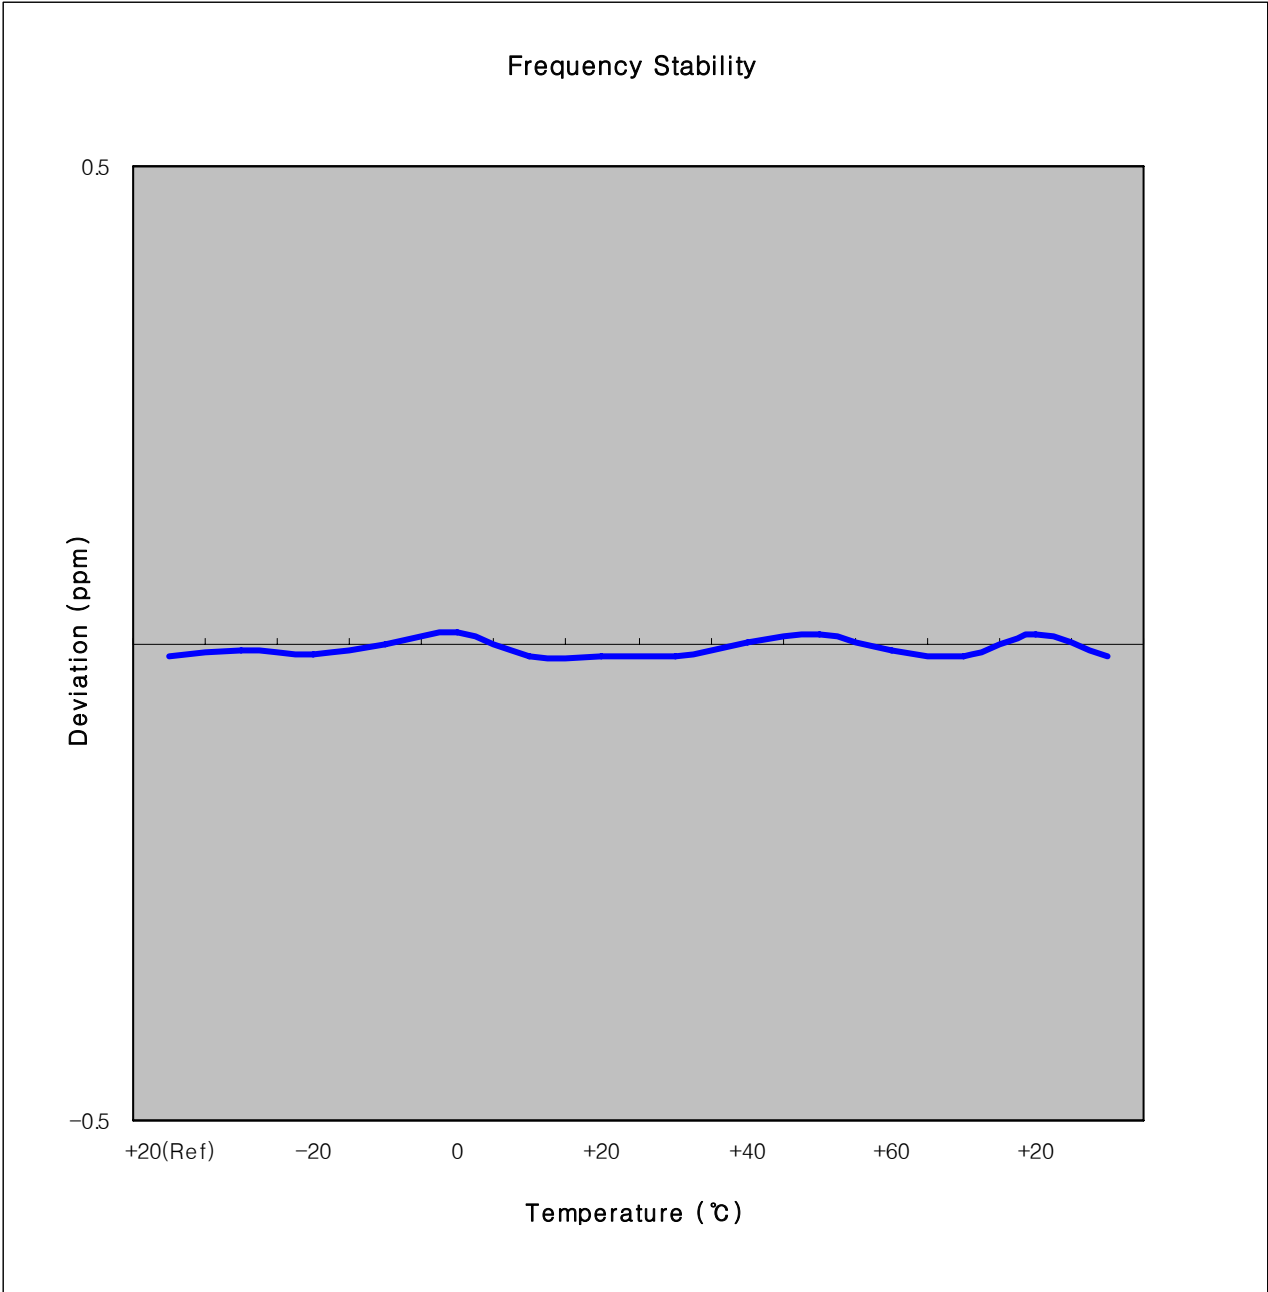



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx Only.


FCC ID : A3LGTC3300I complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS




Agilent


R T

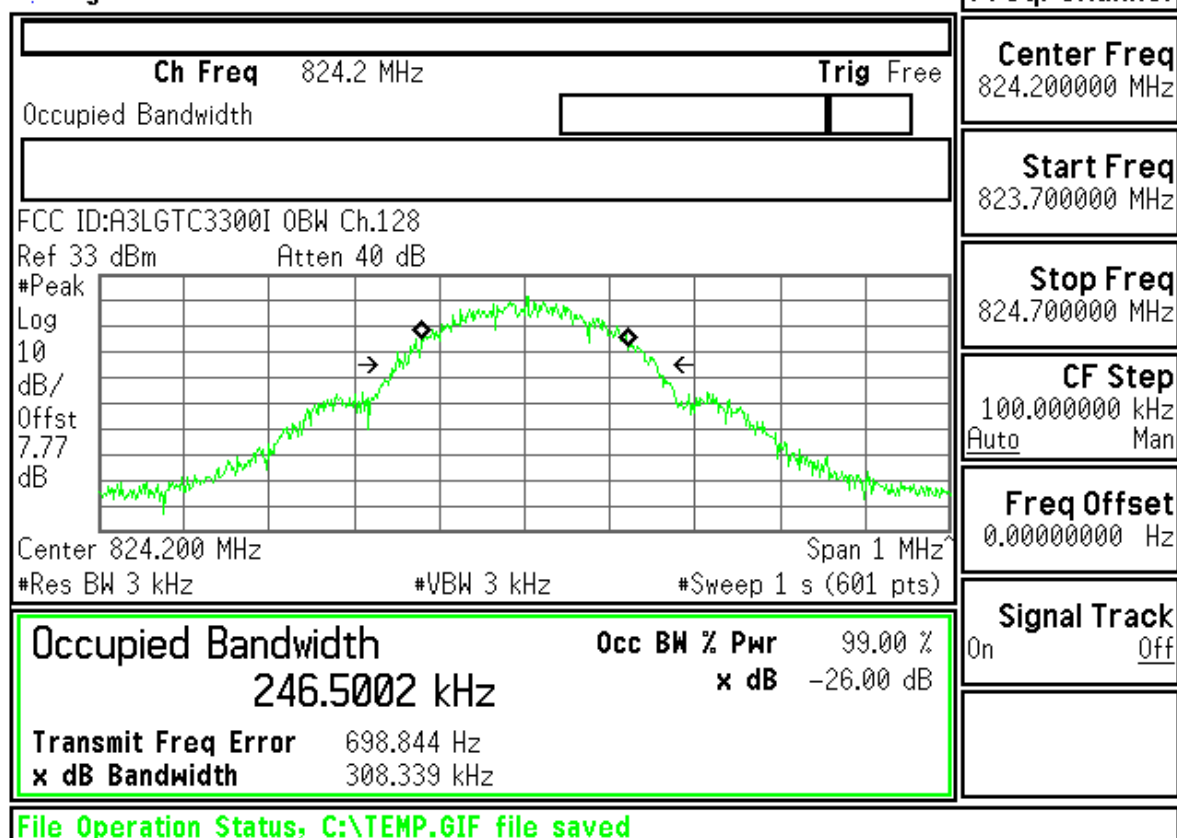

Agilent

R T

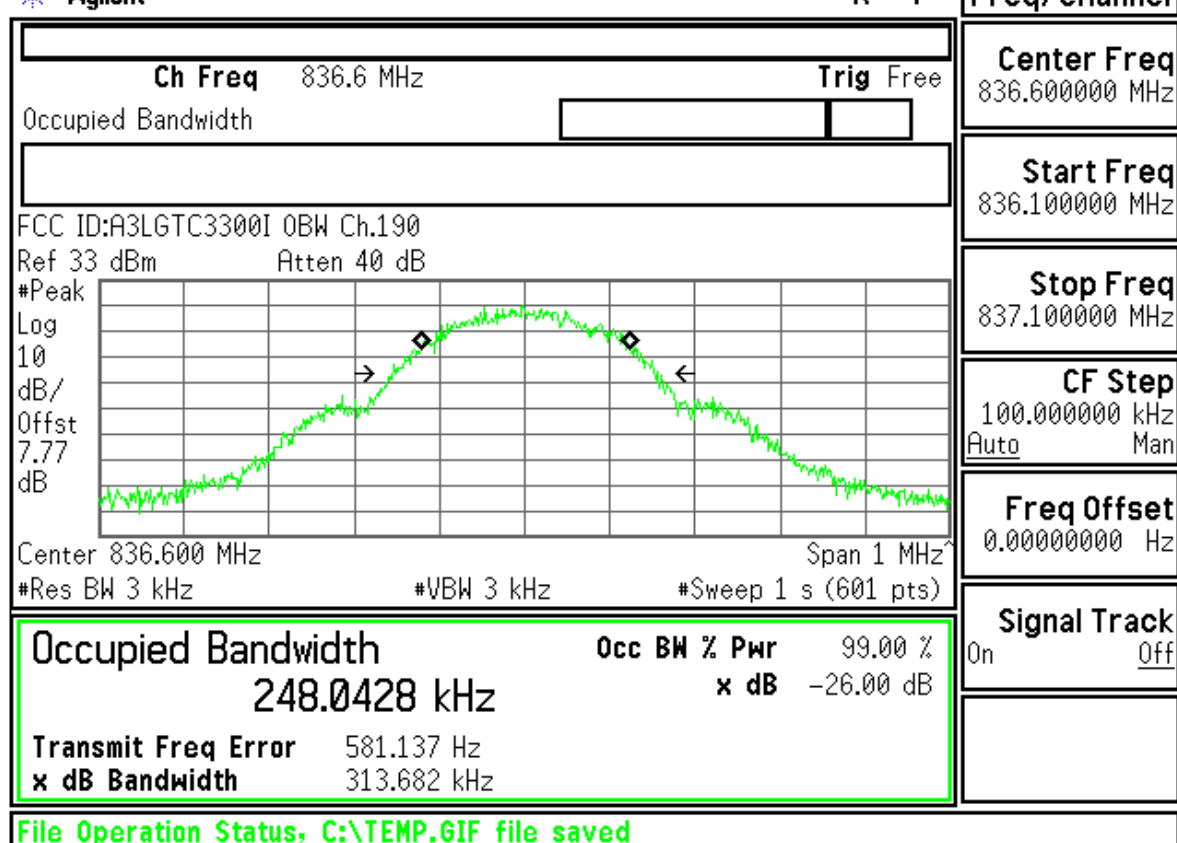


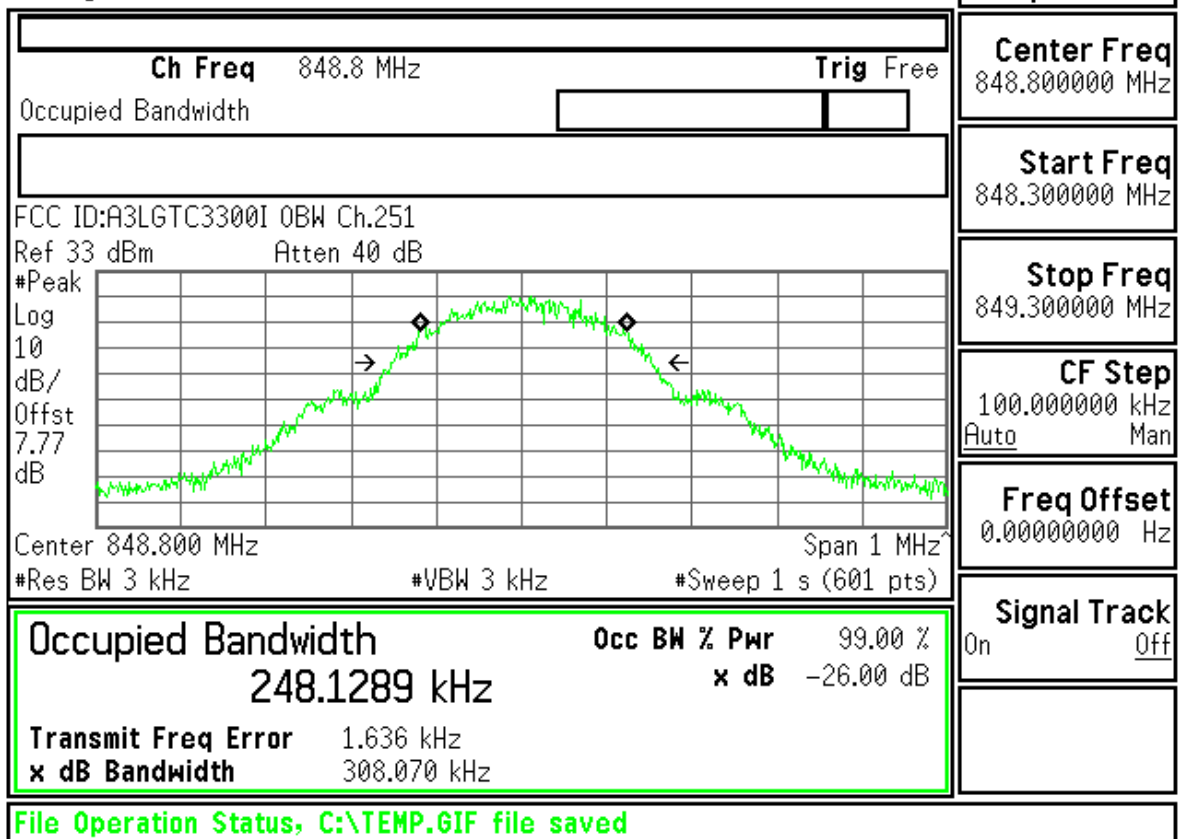




Control	Transmit Power										TCH Parms																				
Transmit Power Setup ▾	<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>31.98</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>31.98</td><td>----</td><td>----</td><td>----</td></tr></table>											Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	31.98	----	----	----	Estimated Carrier Power	31.98	----	----	----	Downlink Traffic Power					
												Burst 1	Burst 2	Burst 3	Burst 4																
											Burst Power	31.98	----	----	----																
											Estimated Carrier Power	31.98	----	----	----																
	Traffic Band																														
GSM850																															
	Single										Traffic Channel																				
											128																				
											MS TX Level																				
											5																				
Swap Window Positions	<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.24</td><td>1.37</td><td>-8.43</td></tr><tr><td>Maximum</td><td>5.26</td><td>1.74</td><td>-0.11</td></tr><tr><td>Average</td><td>4.11</td><td>1.54</td><td>-4.23</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>											Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.24	1.37	-8.43	Maximum	5.26	1.74	-0.11	Average	4.11	1.54	-4.23	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup
											Peak Phase °	RMS Phase °	Frequency Hz																		
Minimum											3.24	1.37	-8.43																		
Maximum											5.26	1.74	-0.11																		
Average											4.11	1.54	-4.23																		
Pass/Fail	Pass	Pass	Pass																												
	50 / 50										Return																				
	Single																														
1 of 2	<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="4">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="4"></td><td colspan="4"></td></tr></table>												Active Cell Connected				Sys Type: GSM														1 of 2
		Active Cell Connected				Sys Type: GSM																									
	<table><tr><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>											IntRef	Offset	R	T																
	IntRef	Offset	R	T																											


Control	Transmit Power										TCH Parms		
Transmit Power Setup ▾											Downlink Traffic Power		
											Traffic Band		
											GSM850		
											Traffic Channel		
											190		
Single										MS TX Level			
										5			
Swap Window Positions	Phase & Frequency Error										Channel Mode Setup		
											Return		
1 of 2	50 / 50 Single										Active Cell Connected		
											Sys Type: GSM		
										1 of 2			

Control	Transmit Power								TCH Parms																									
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.14</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.14</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.14	----	----	----	Estimated Carrier Power	32.14	----	----	----	Downlink Traffic Power										
									Burst 1	Burst 2	Burst 3	Burst 4																						
Burst Power									32.14	----	----	----																						
Estimated Carrier Power									32.14	----	----	----																						
	Traffic Band																																	
	GSM850																																	
	Traffic Channel																																	
	251																																	
	MS TX Level																																	
	5																																	
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.13</td> <td>1.30</td> <td>-11.21</td> </tr> <tr> <td>Maximum</td> <td>5.10</td> <td>1.65</td> <td>4.96</td> </tr> <tr> <td>Average</td> <td>3.86</td> <td>1.44</td> <td>-1.44</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.13	1.30	-11.21	Maximum	5.10	1.65	4.96	Average	3.86	1.44	-1.44	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
Phase & Frequency Error																																		
									Peak Phase °	RMS Phase °	Frequency Hz																							
Minimum									3.13	1.30	-11.21																							
Maximum	5.10	1.65	4.96																															
Average	3.86	1.44	-1.44																															
Pass/Fail	Pass	Pass	Pass																															
	Return																																	
	1 of 2																																	
	<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="4">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Active Cell Connected				Sys Type: GSM																					
Active Cell Connected				Sys Type: GSM																														
	<table border="1"> <thead> <tr> <th>IntRef</th> <th>Offset</th> <th>R</th> <th>T</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								IntRef	Offset	R	T					1 of 2																	
IntRef	Offset	R	T																															

Control	Power vs Time Graph								TCH Parms																	
Power vs Time Setup									Downlink Traffic Power																	
									Traffic Band																	
									GSM850																	
Change View									Traffic Channel																	
	128																									
	MS TX Level																									
	5																									
	Channel Mode Setup																									
	Return																									
	1 of 2																									
	<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="4">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Active Cell Connected				Sys Type: GSM													
Active Cell Connected				Sys Type: GSM																						
	<table border="1"> <thead> <tr> <th>IntRef</th> <th>Offset</th> <th>R</th> <th>T</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								IntRef	Offset	R	T					1 of 2									
IntRef	Offset	R	T																							

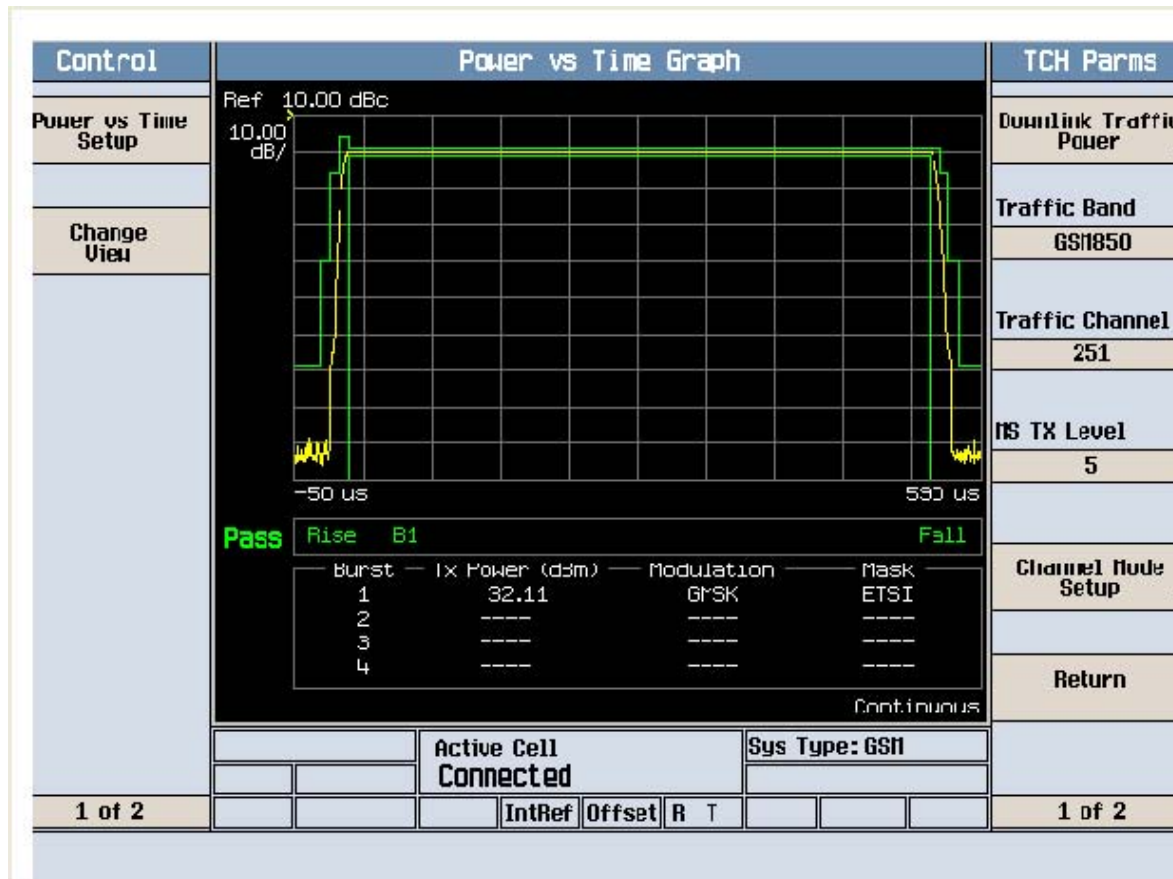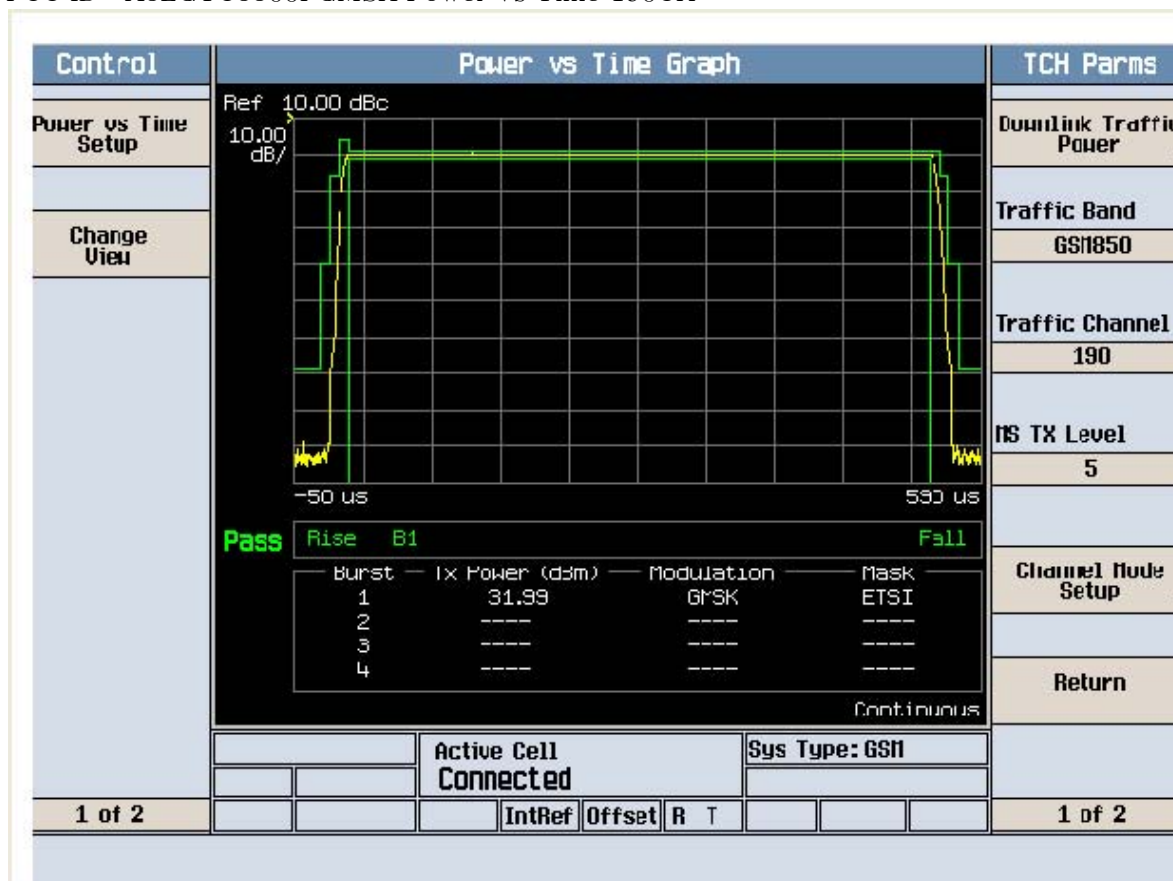

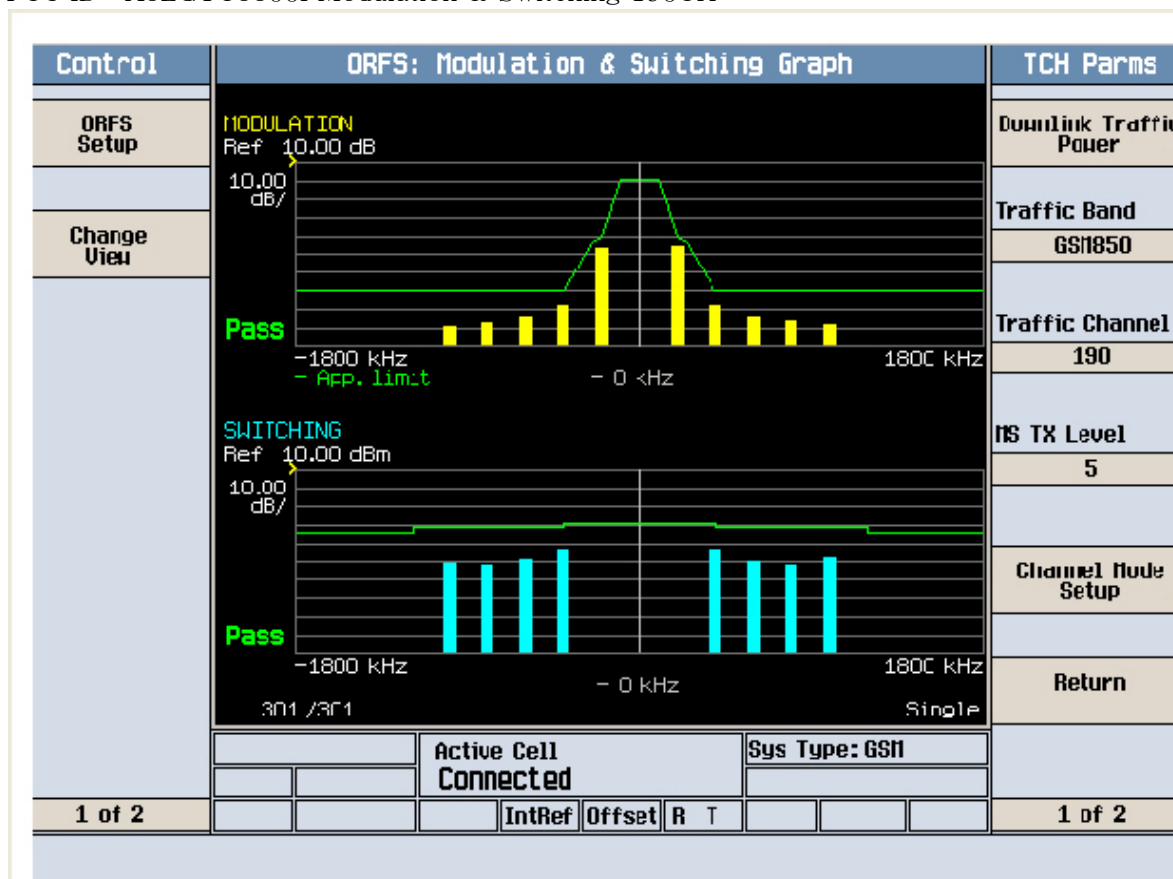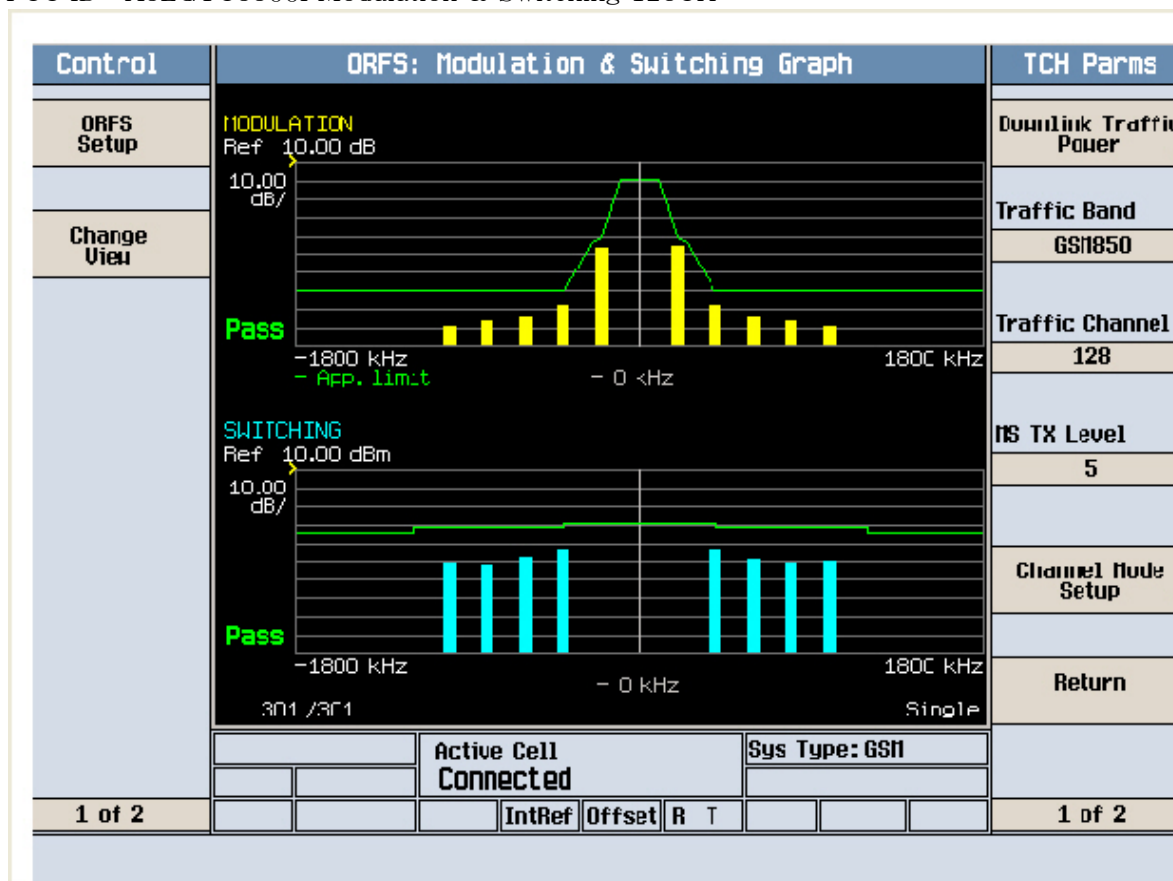

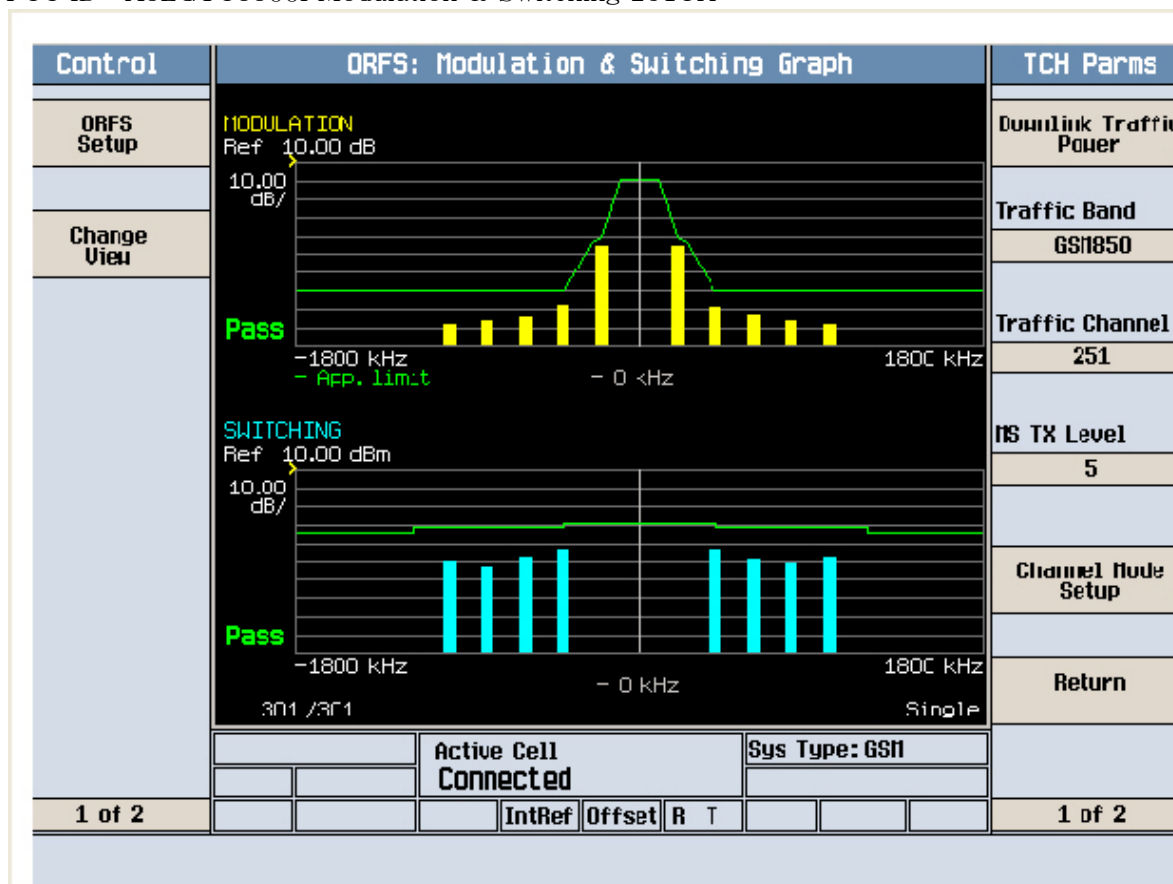

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.128

Mkr1 518.4 MHz

Ref 33 dBm

Atten 40 dB

-34.15 dBm

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq
414.600000 MHz

Start Freq
10.0000000 MHz

Stop Freq
819.200000 MHz

CF Step
80.9200000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

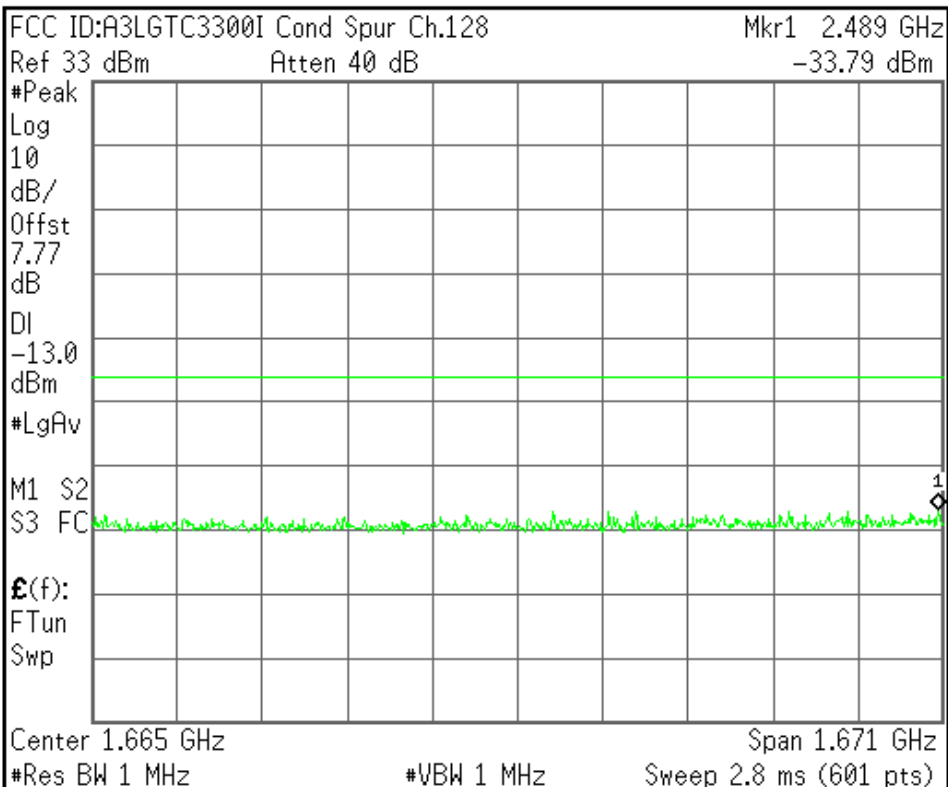

Center Freq
1.66460000 GHz

Start Freq
829.200000 MHz

Stop Freq
2.50000000 GHz

CF Step
167.080000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

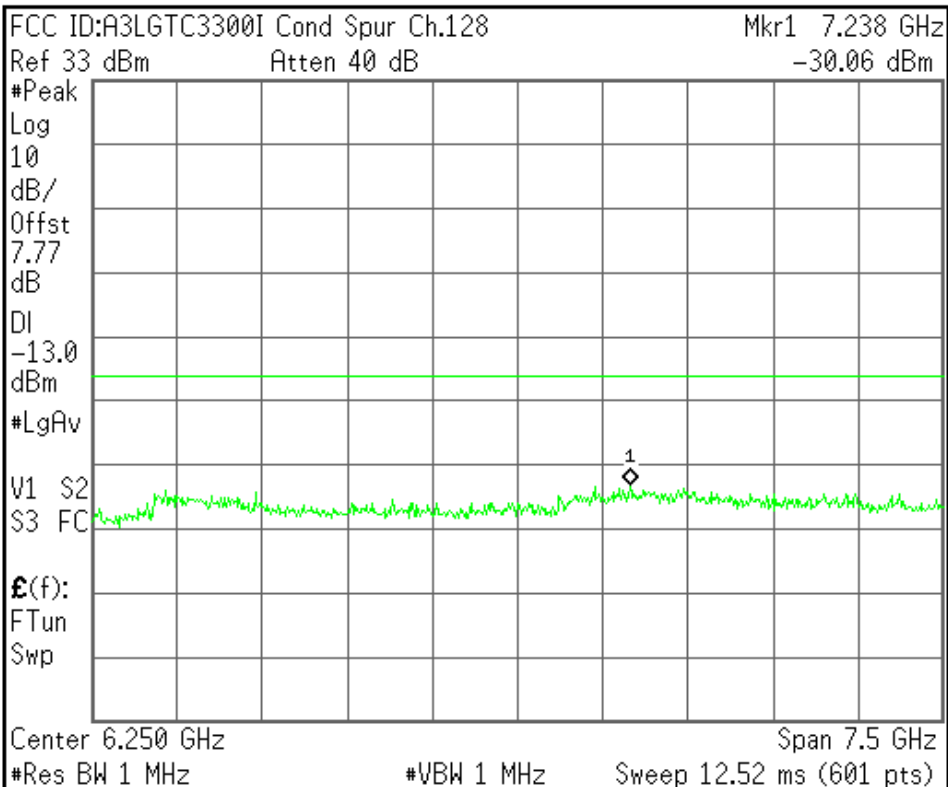

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.190

Mkr1 364.7 MHz

Ref 33 dBm

Atten 40 dB

-34.14 dBm

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz

Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

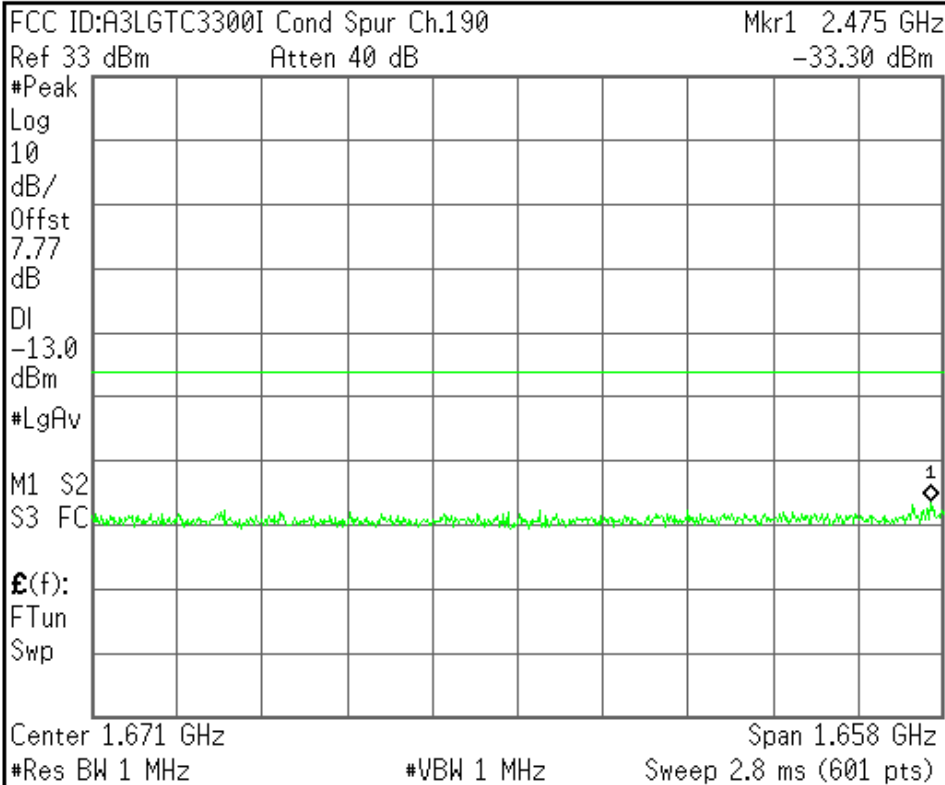


Center Freq 1.67080000 GHz
Start Freq 841.600000 MHz
Stop Freq 2.50000000 GHz
CF Step 165.840000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

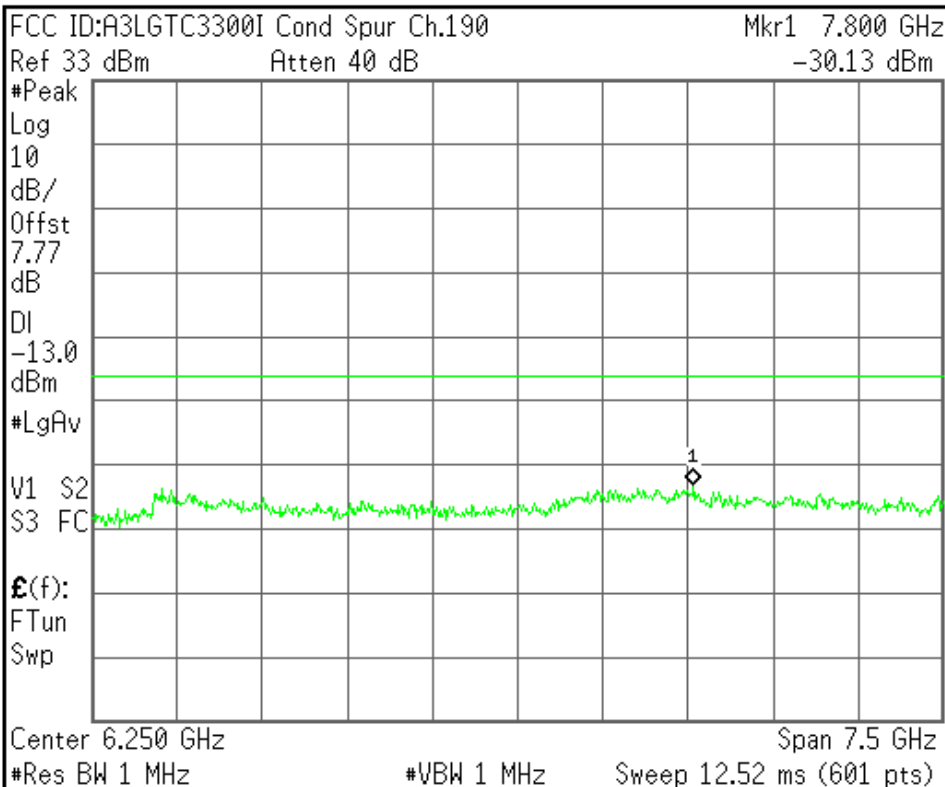

Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.251

Mkr1 394.9 MHz

Ref 33 dBm

Atten 40 dB

-34.04 dBm

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
426.900000 MHz

Start Freq
10.0000000 MHz

Stop Freq
843.800000 MHz

CF Step
83.3800000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

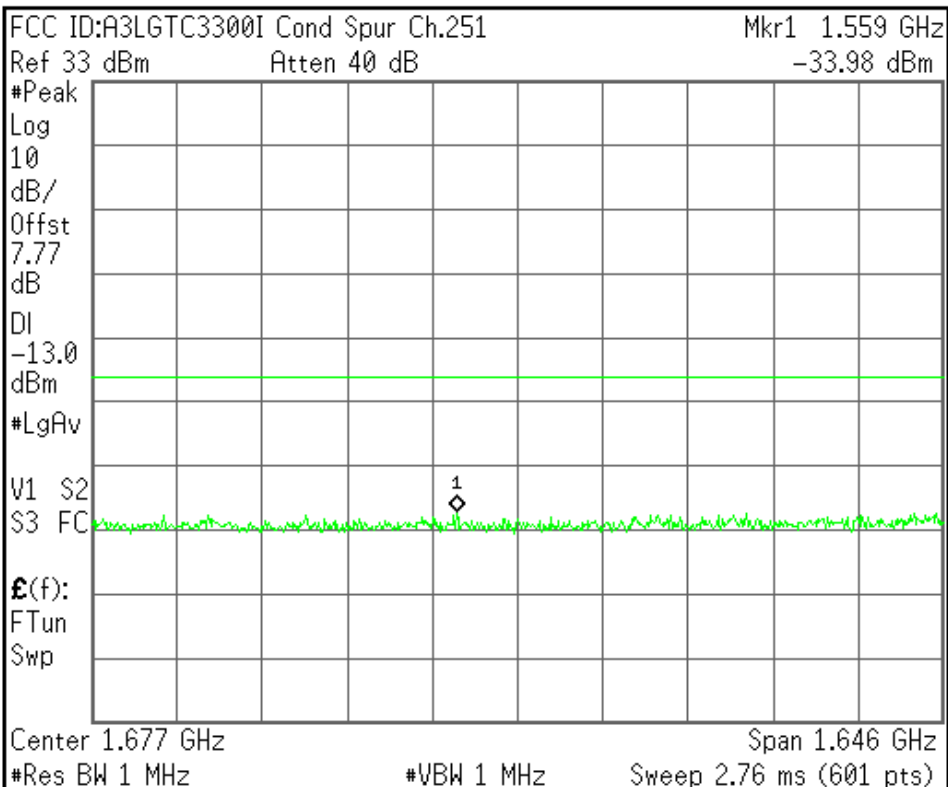

Center Freq
 1.67690000 GHz

Start Freq
 853.800000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 164.620000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

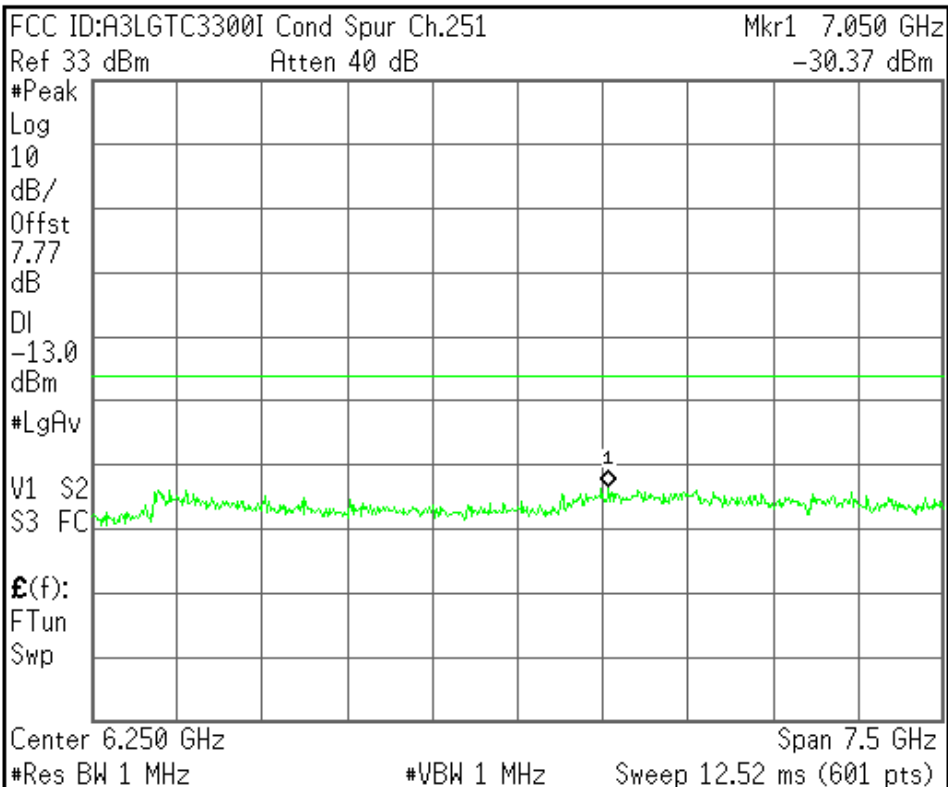

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

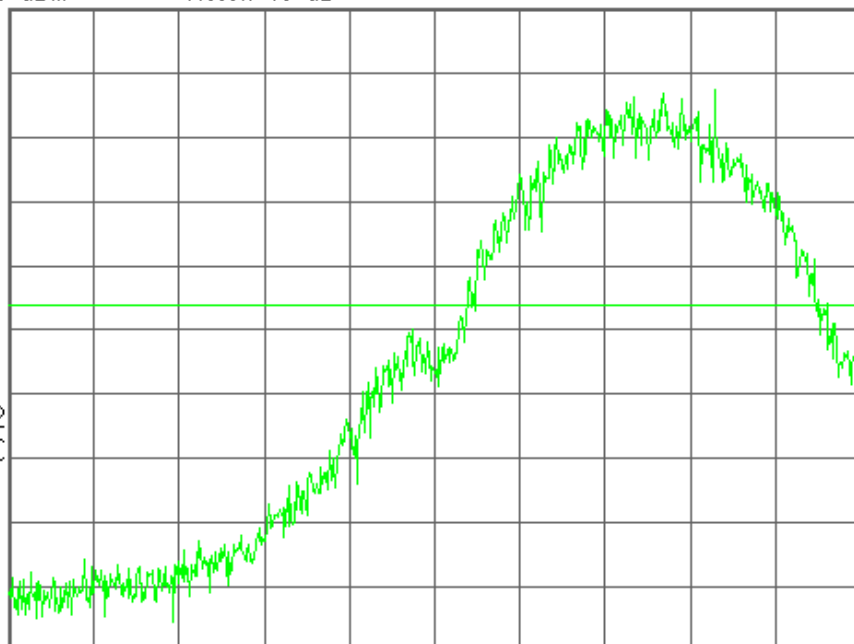

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3L6TC3300I Band Edge Ch.128

Mkr1 823.966 6 MHz

Ref 33 dBm

Atten 40 dB

-18.34 dBm

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

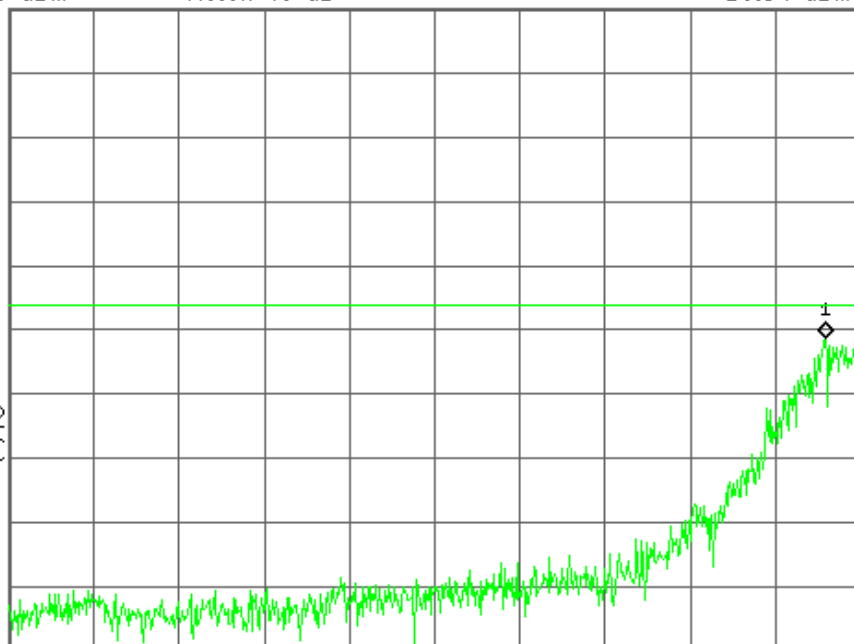

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

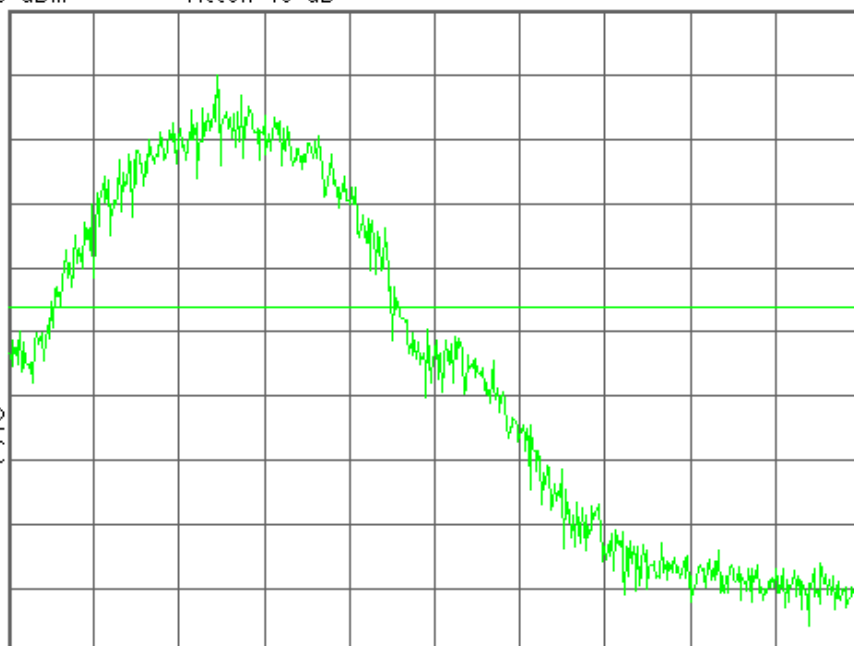

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTC3300I Band Edge Ch.251

Mkr1 849.018 7 MHz

Ref 33 dBm

Atten 40 dB

-16.50 dBm

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

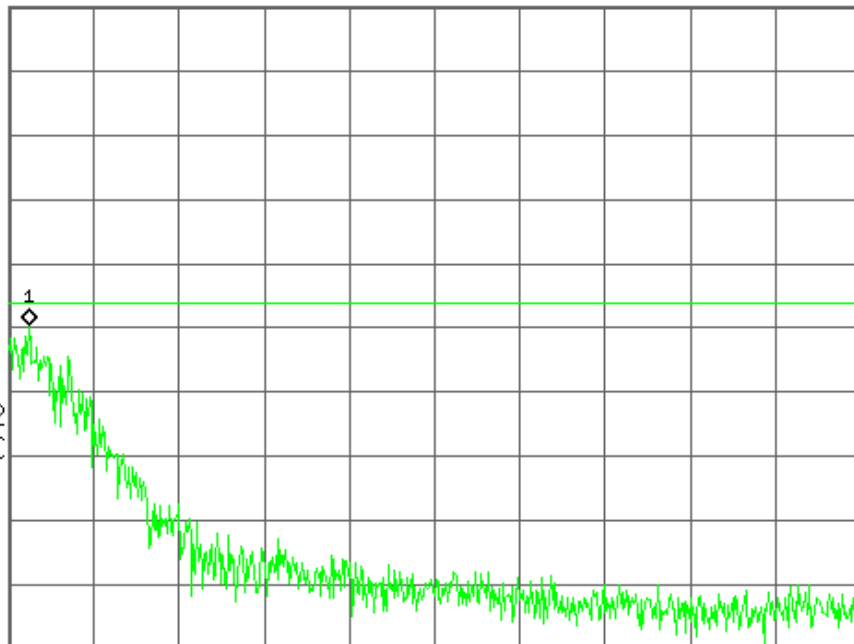

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

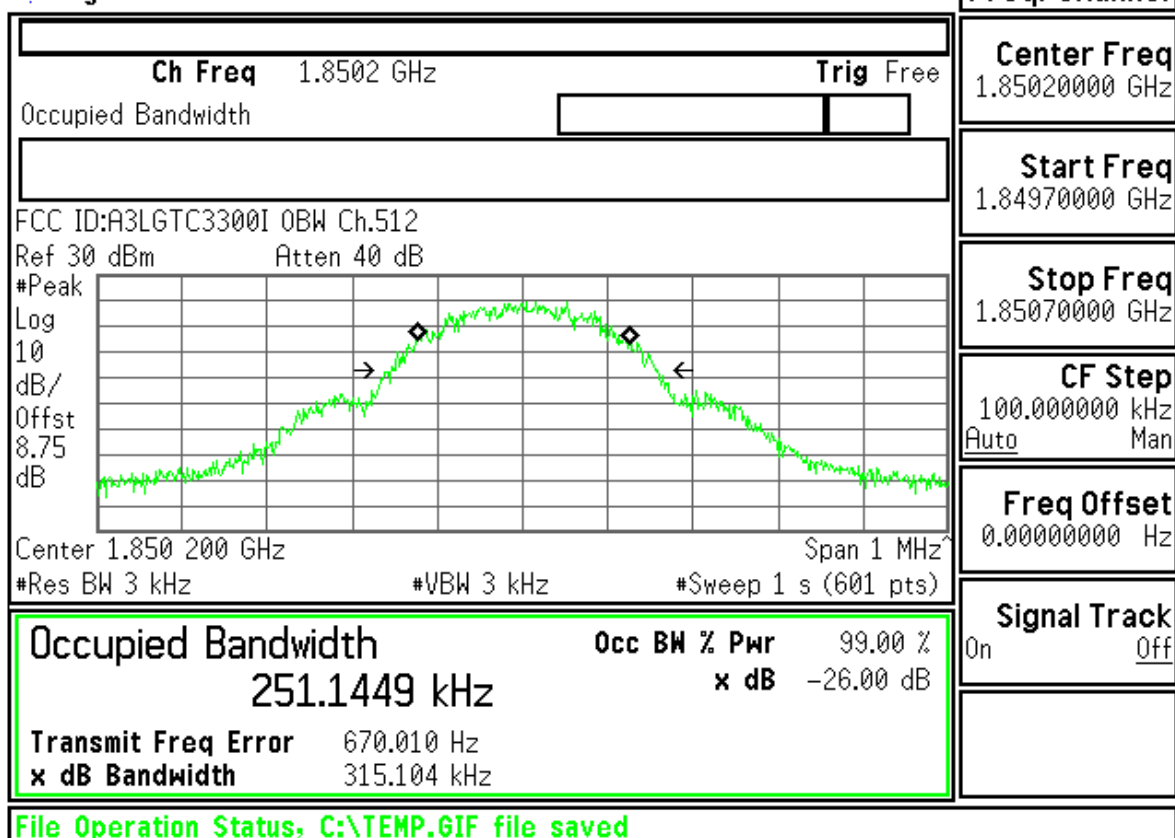

Freq/Channel

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Agilent

R T

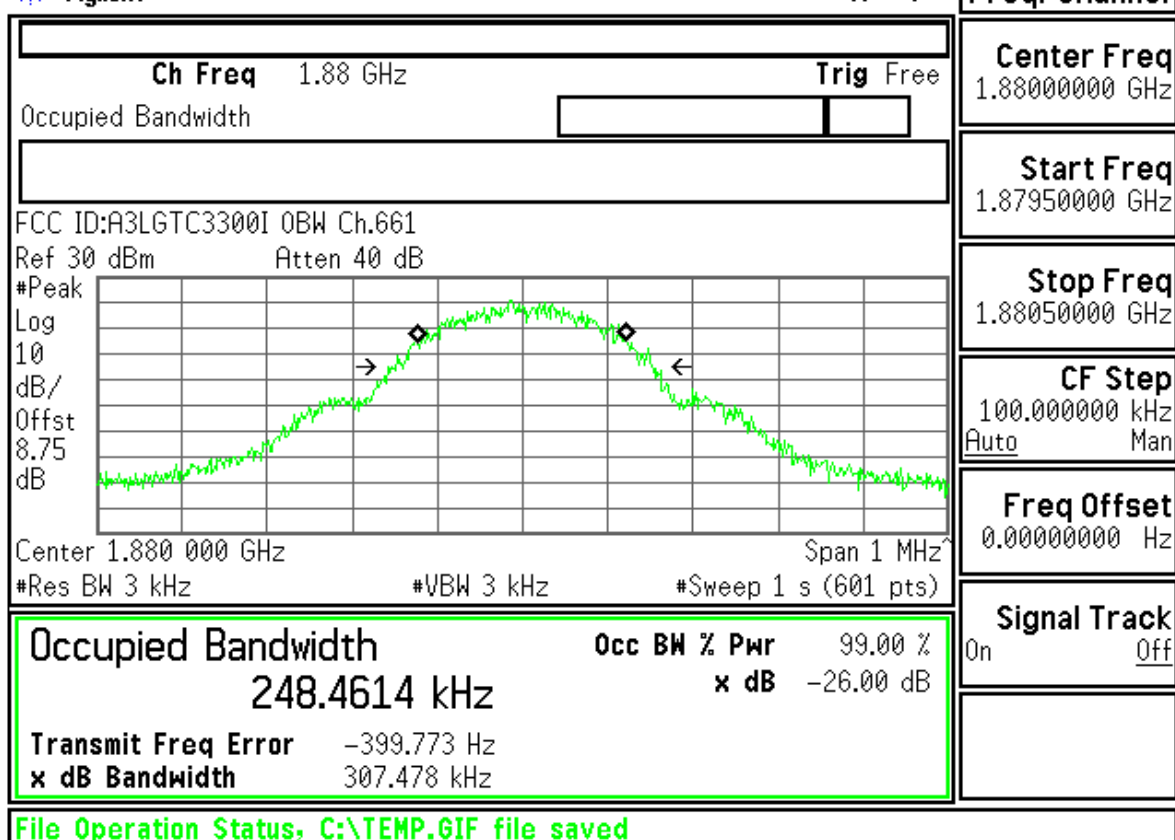

Freq/Channel

Center Freq
1.88000000 GHz


Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


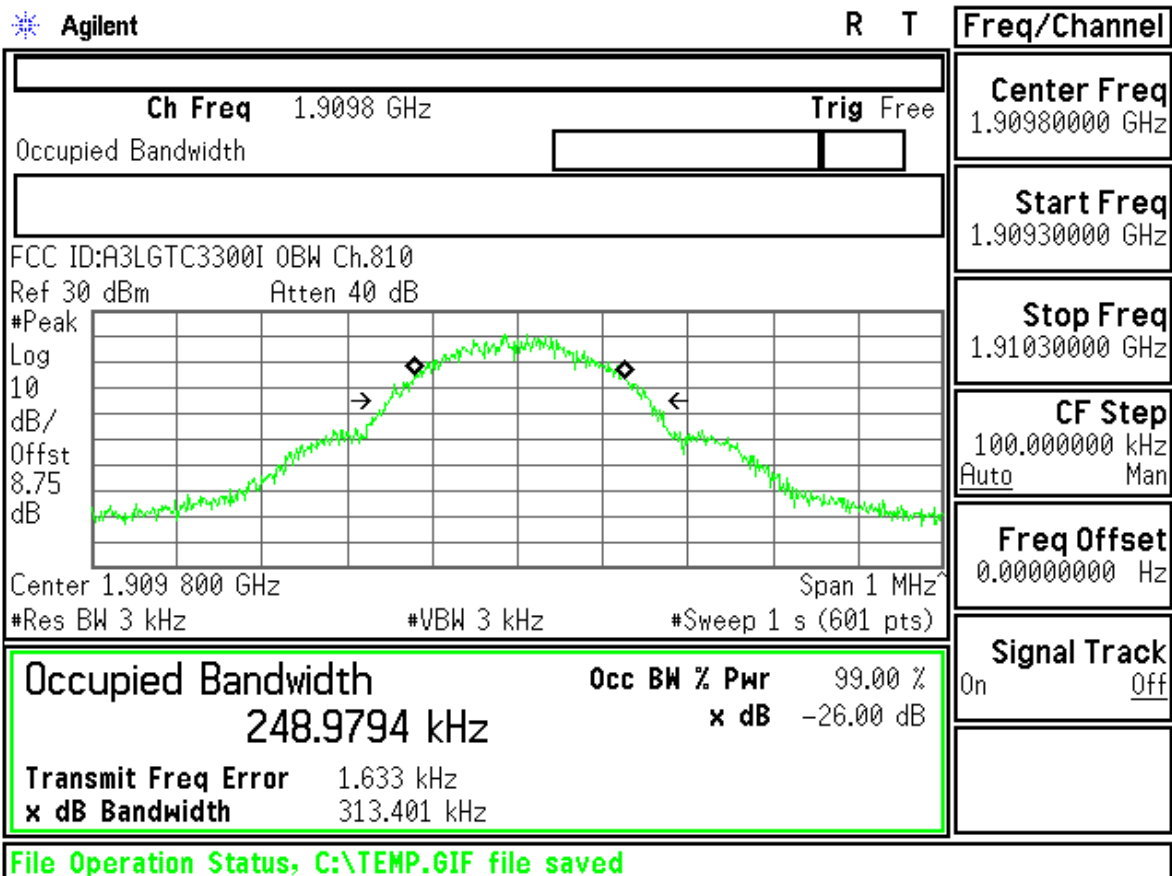




FCC ID : A3LGTC3300I Transmit Power 512CH



Measurement/Instrument Screen																																									
Control		Transmit Power										TCH Parms																													
Transmit Power Setup		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.25</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.25</td><td>----</td><td>----</td><td>----</td></tr></table>											Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.25	----	----	----	Estimated Carrier Power	29.25	----	----	----	Downlink Traffic Power														
													Burst 1	Burst 2	Burst 3	Burst 4																									
												Burst Power	29.25	----	----	----																									
												Estimated Carrier Power	29.25	----	----	----																									
												Traffic Band																													
PCS																																									
Traffic Channel																																									
Setup Window Positions		<table><tr><th colspan="4">Phase & Frequency Error</th></tr><tr><th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr><tr><td>Minimum</td><td>4.24</td><td>1.70</td><td>-10.22</td></tr><tr><td>Maximum</td><td>7.30</td><td>2.26</td><td>7.75</td></tr><tr><td>Average</td><td>5.84</td><td>1.99</td><td>0.29</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.24	1.70	-10.22	Maximum	7.30	2.26	7.75	Average	5.84	1.99	0.29	Pass/Fail	Pass	Pass	Pass	512					
												Phase & Frequency Error																													
													Peak Phase °	RMS Phase °	Frequency Hz																										
												Minimum	4.24	1.70	-10.22																										
												Maximum	7.30	2.26	7.75																										
Average	5.84	1.99	0.29																																						
Pass/Fail	Pass	Pass	Pass																																						
MS TX Level																																									
0																																									
1 of 2		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="4">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="4"></td><td colspan="4"></td></tr><tr><td></td><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>												Active Cell Connected				Sys Type: GSM																IntRef	Offset	R	T				Channel Mode Setup
														Active Cell Connected				Sys Type: GSM																							
														IntRef	Offset	R	T																								
												Return																													
1 of 2																																									

Measurement/Instrument Screen																																							
Control	Transmit Power							TCH Parms																															
Transmit Power Setup ▾								Downlink Traffic Power ▾																															
								Traffic Band																															
								PCS																															
								Traffic Channel																															
Swap Window Positions								661																															
								MS TX Level																															
								0																															
								Channel Mode Setup ▾																															
								Return																															
							1 of 2																																
<table border="1"> <thead> <tr> <th colspan="4">Burst 1</th> <th colspan="2">Burst 2</th> <th colspan="2">Burst 3</th> <th colspan="2">Burst 4</th> </tr> </thead> <tbody> <tr> <td colspan="4">Burst Power</td> <td colspan="2">29.84</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> <tr> <td colspan="4">Estimated Carrier Power</td> <td colspan="2">29.84</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> </tbody> </table>										Burst 1				Burst 2		Burst 3		Burst 4		Burst Power				29.84		----		----		Estimated Carrier Power				29.84		----		----	
Burst 1				Burst 2		Burst 3		Burst 4																															
Burst Power				29.84		----		----																															
Estimated Carrier Power				29.84		----		----																															
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.55</td> <td>1.67</td> <td>-10.41</td> </tr> <tr> <td>Maximum</td> <td>7.55</td> <td>2.28</td> <td>4.02</td> </tr> <tr> <td>Average</td> <td>6.00</td> <td>1.99</td> <td>-2.61</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.55	1.67	-10.41	Maximum	7.55	2.28	4.02	Average	6.00	1.99	-2.61	Pass/Fail	Pass	Pass	Pass						
Phase & Frequency Error																																							
	Peak Phase °	RMS Phase °	Frequency Hz																																				
Minimum	4.55	1.67	-10.41																																				
Maximum	7.55	2.28	4.02																																				
Average	6.00	1.99	-2.61																																				
Pass/Fail	Pass	Pass	Pass																																				
<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="2">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> </tr> </tbody> </table>										Active Cell Connected				Sys Type: GSM																									
Active Cell Connected				Sys Type: GSM																																			
<table border="1"> <thead> <tr> <th colspan="4">IntRef</th> <th colspan="2">Offset</th> <th colspan="2">R T</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </tbody> </table>										IntRef				Offset		R T																							
IntRef				Offset		R T																																	

Measurement/Instrument Screen																																							
Control	Transmit Power							TCH Parms																															
Transmit Power Setup ▾								Downlink Traffic Power ▾																															
								Traffic Band																															
								PCS																															
								Traffic Channel																															
Swap Window Positions								810																															
								MS TX Level																															
								0																															
								Channel Mode Setup ▾																															
								Return																															
								1 of 2																															
<table border="1"> <thead> <tr> <th colspan="4">Burst 1</th> <th colspan="2">Burst 2</th> <th colspan="2">Burst 3</th> <th colspan="2">Burst 4</th> </tr> </thead> <tbody> <tr> <td colspan="4">Burst Power</td> <td colspan="2">29.57</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> <tr> <td colspan="4">Estimated Carrier Power</td> <td colspan="2">29.57</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> </tbody> </table>										Burst 1				Burst 2		Burst 3		Burst 4		Burst Power				29.57		----		----		Estimated Carrier Power				29.57		----		----	
Burst 1				Burst 2		Burst 3		Burst 4																															
Burst Power				29.57		----		----																															
Estimated Carrier Power				29.57		----		----																															
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.69</td> <td>1.67</td> <td>-5.41</td> </tr> <tr> <td>Maximum</td> <td>8.12</td> <td>2.47</td> <td>14.49</td> </tr> <tr> <td>Average</td> <td>6.14</td> <td>2.03</td> <td>2.70</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.69	1.67	-5.41	Maximum	8.12	2.47	14.49	Average	6.14	2.03	2.70	Pass/Fail	Pass	Pass	Pass						
Phase & Frequency Error																																							
	Peak Phase °	RMS Phase °	Frequency Hz																																				
Minimum	4.69	1.67	-5.41																																				
Maximum	8.12	2.47	14.49																																				
Average	6.14	2.03	2.70																																				
Pass/Fail	Pass	Pass	Pass																																				
<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="2">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> </tr> </tbody> </table>										Active Cell Connected				Sys Type: GSM																									
Active Cell Connected				Sys Type: GSM																																			
<table border="1"> <thead> <tr> <th colspan="4">IntRef</th> <th colspan="2">Offset</th> <th colspan="2">R T</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </tbody> </table>										IntRef				Offset		R T																							
IntRef				Offset		R T																																	

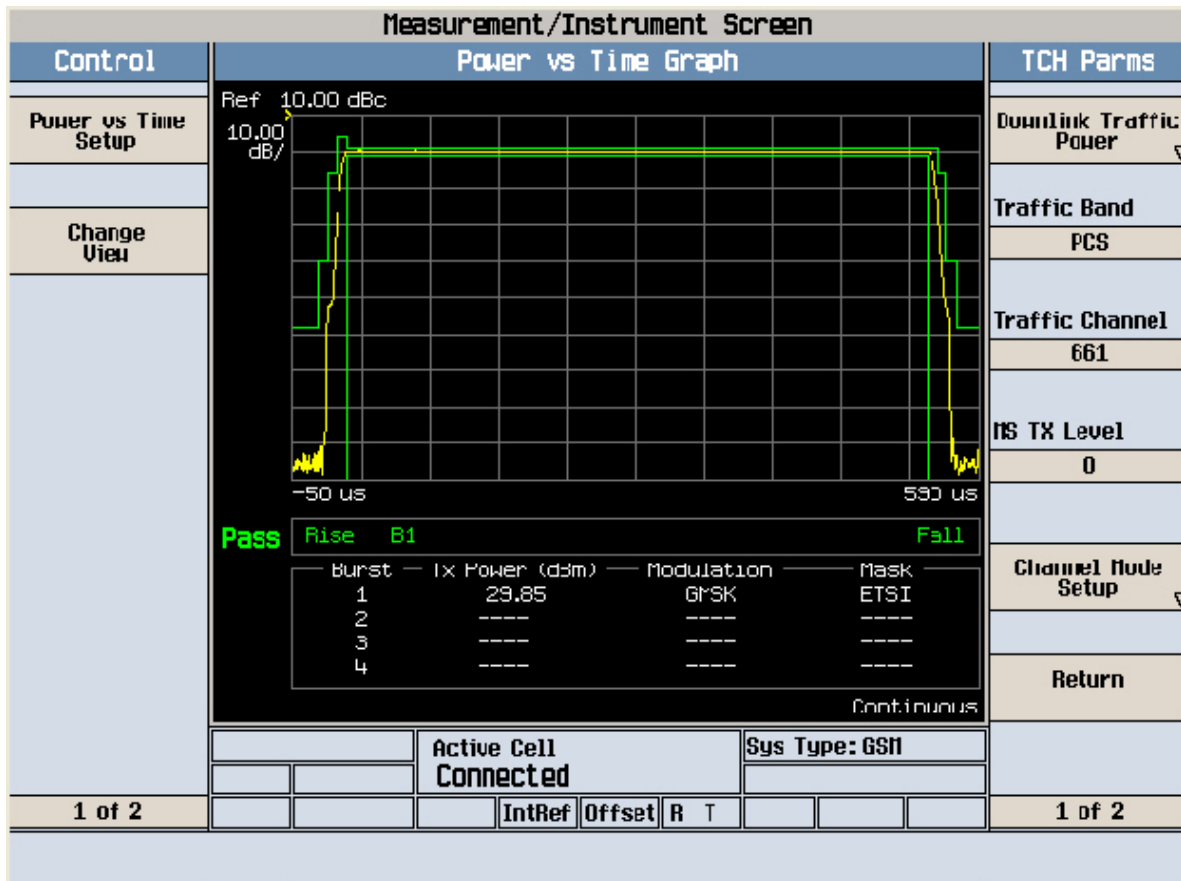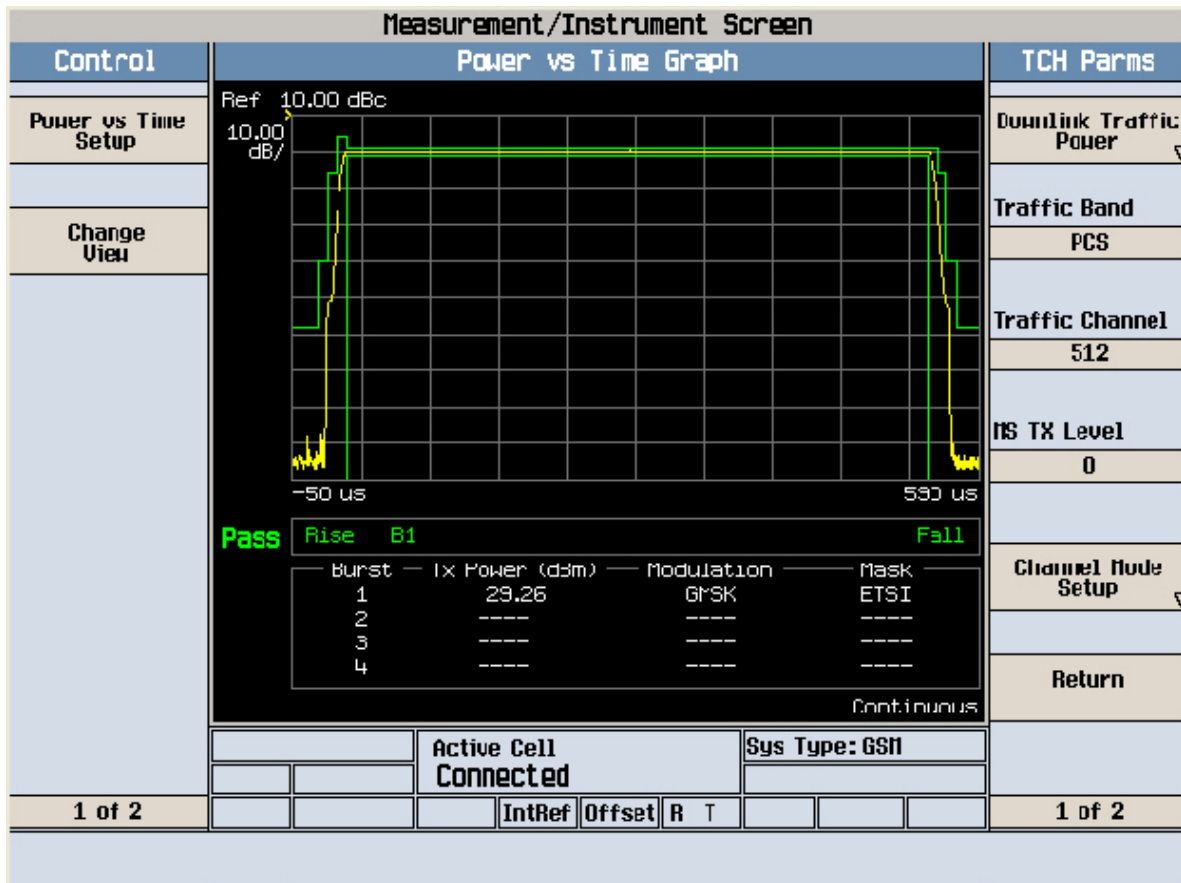

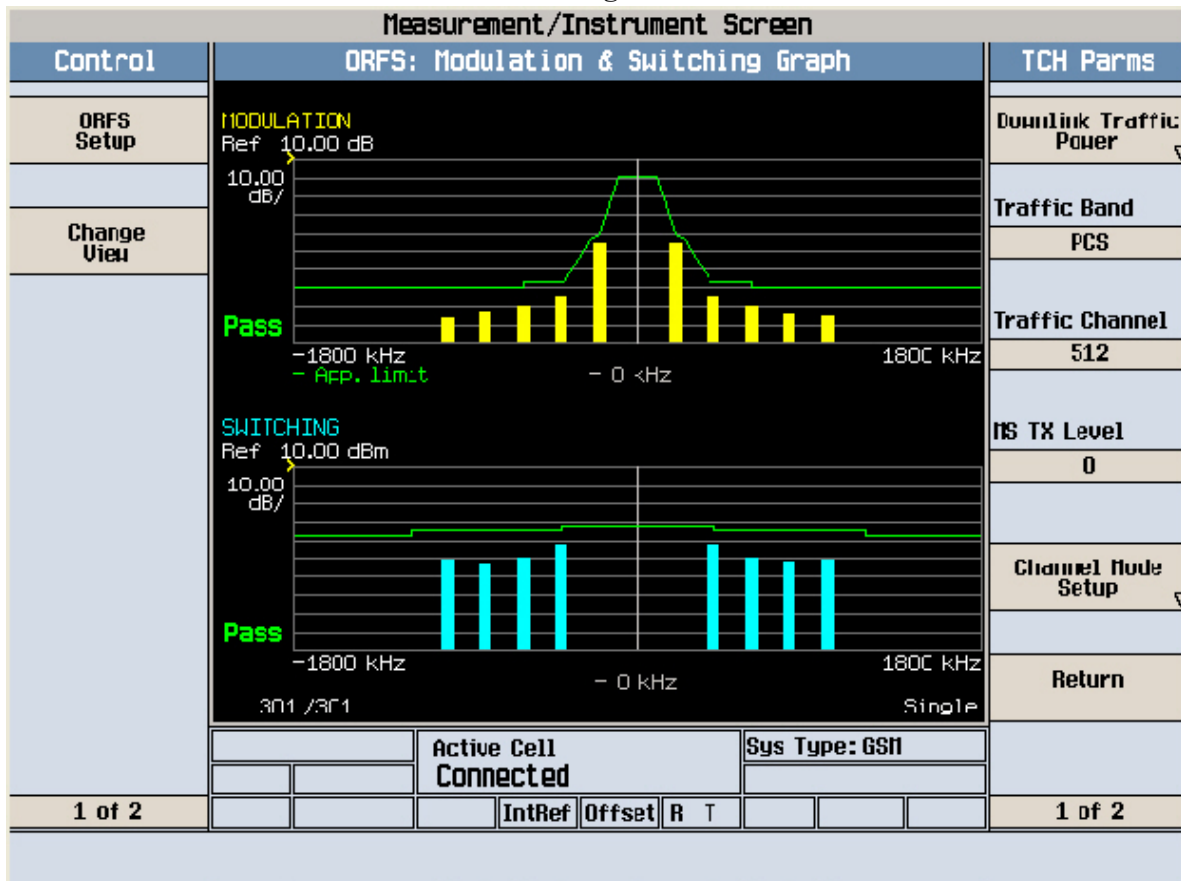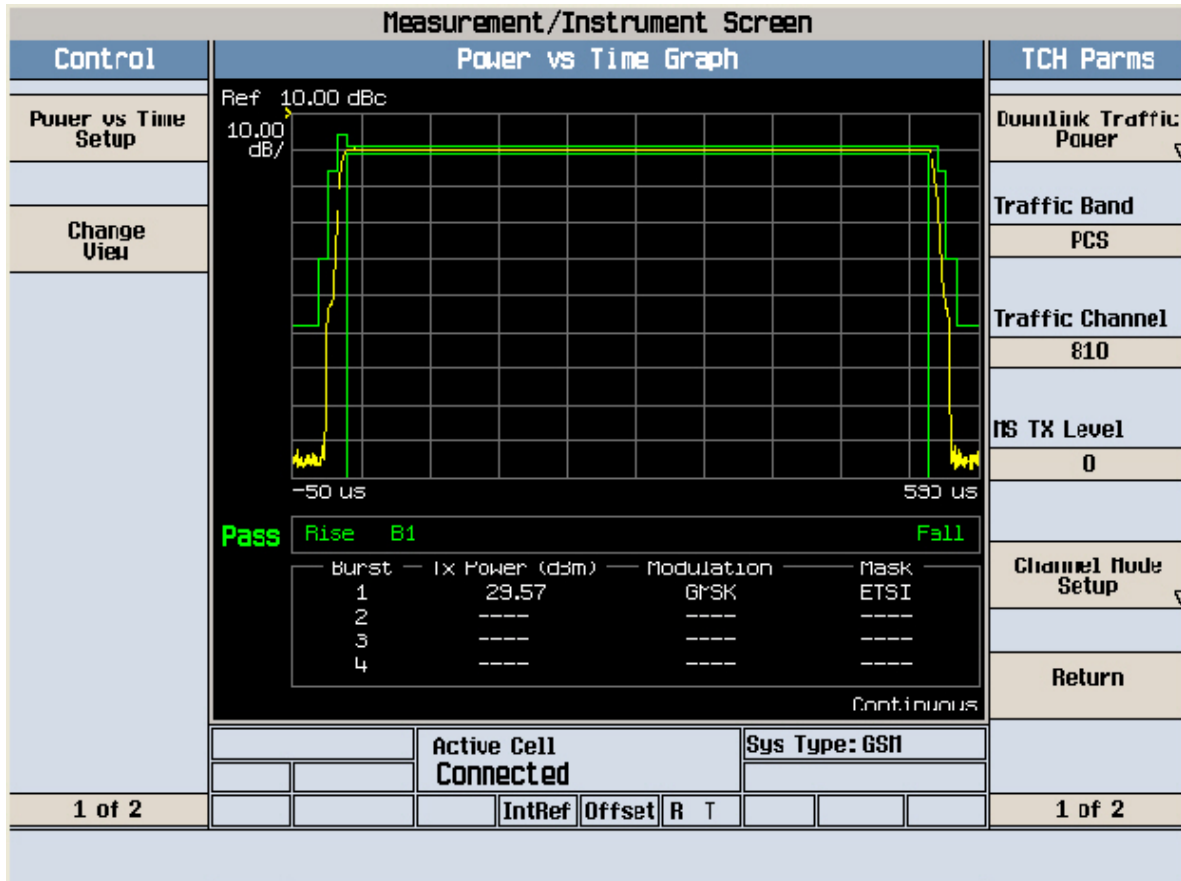

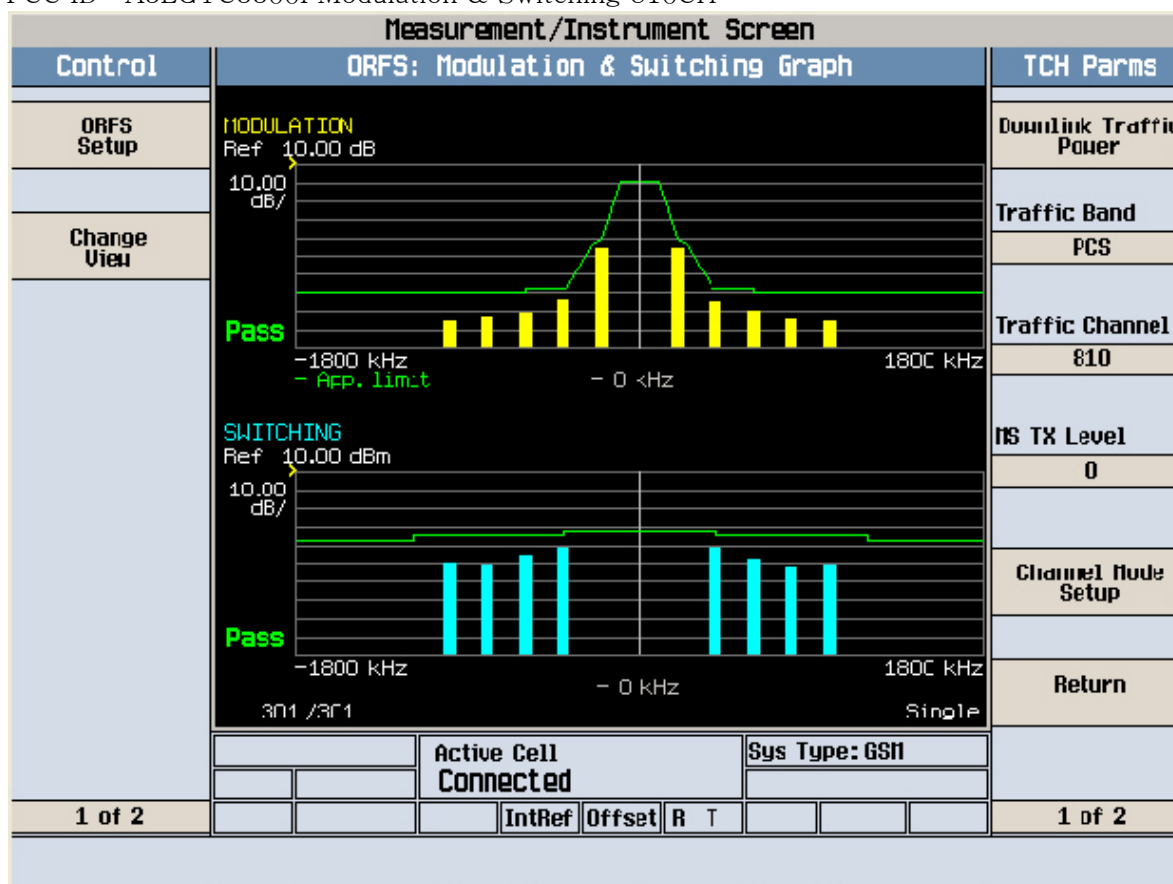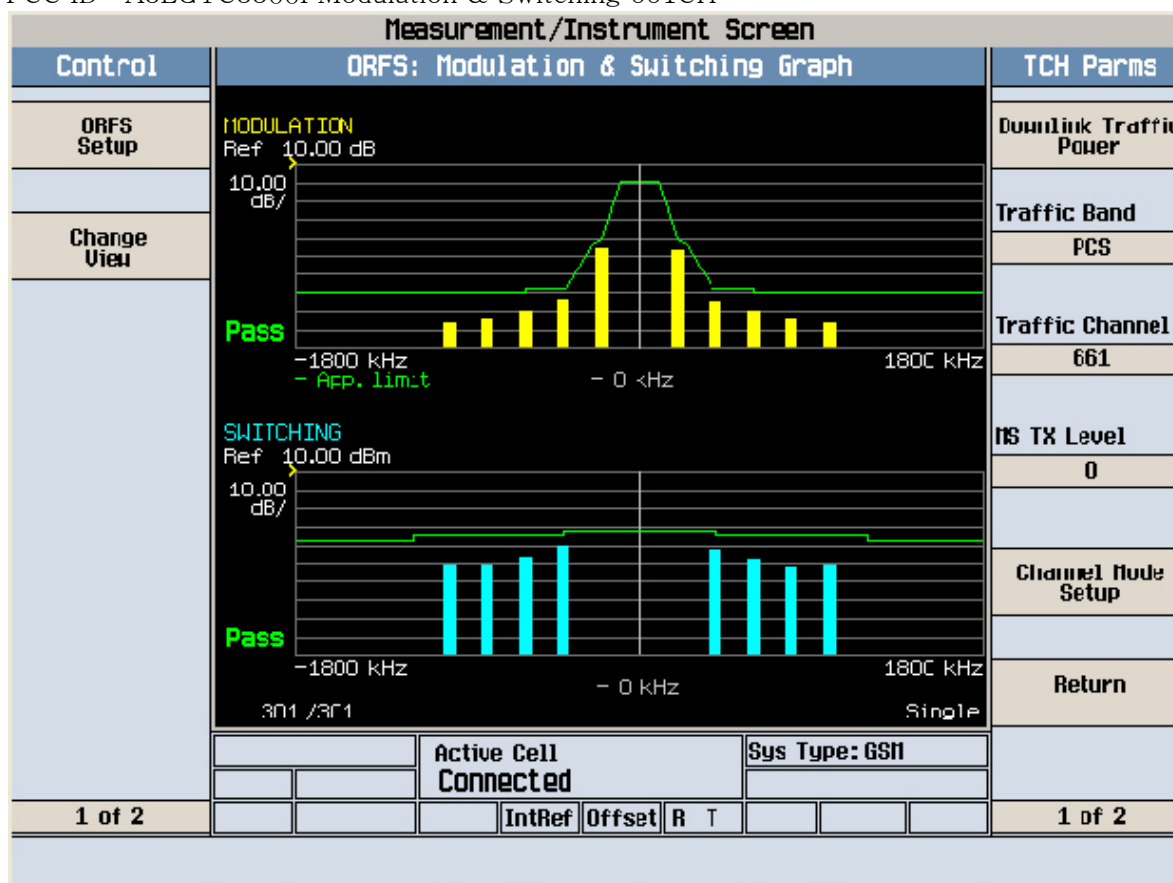

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

Mkr1 596 MHz

-32.97 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

926.350000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.84270000 GHz

CF Step

183.270000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

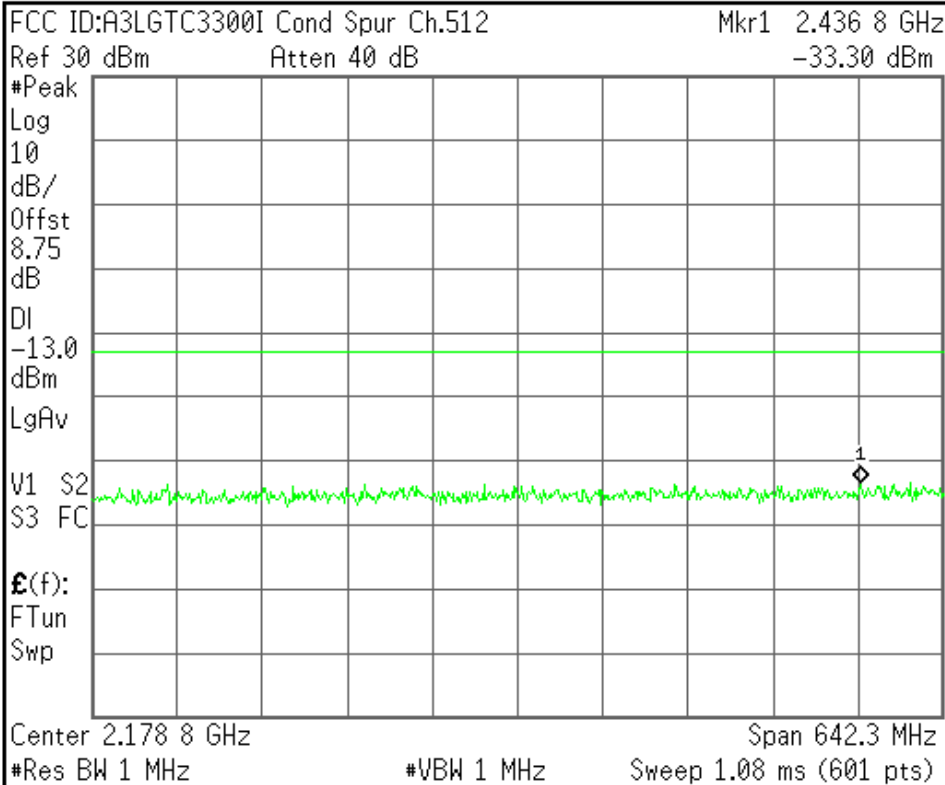

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

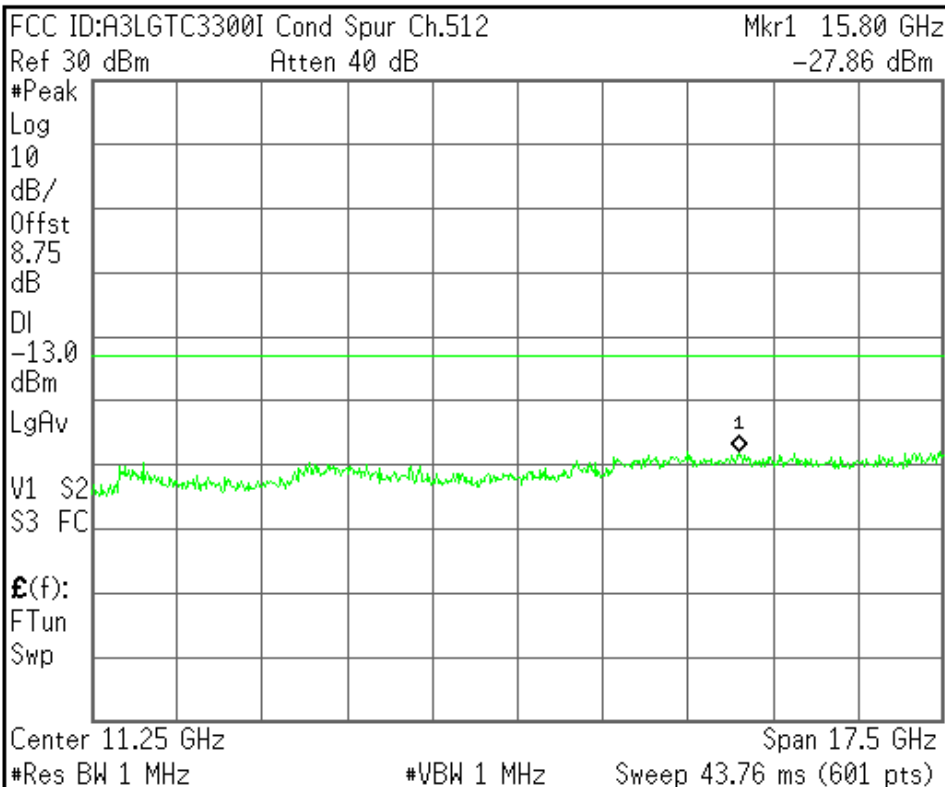

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Cond Spur Ch.661

Mkr1 1.342 GHz

Ref 30 dBm

Atten 40 dB

-32.82 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

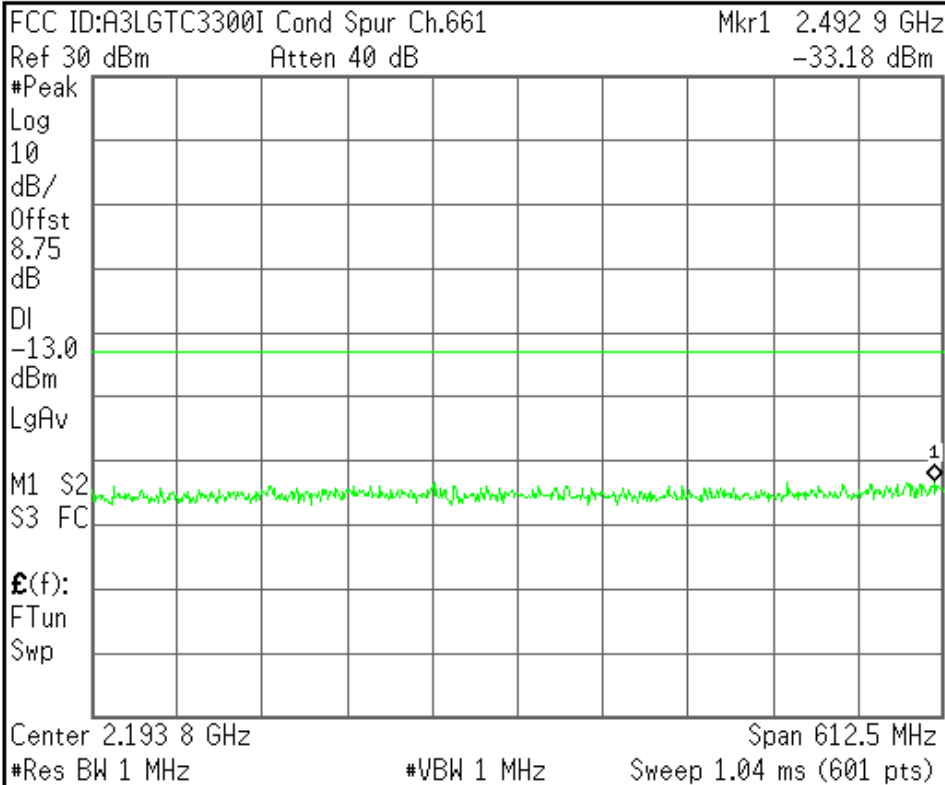

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

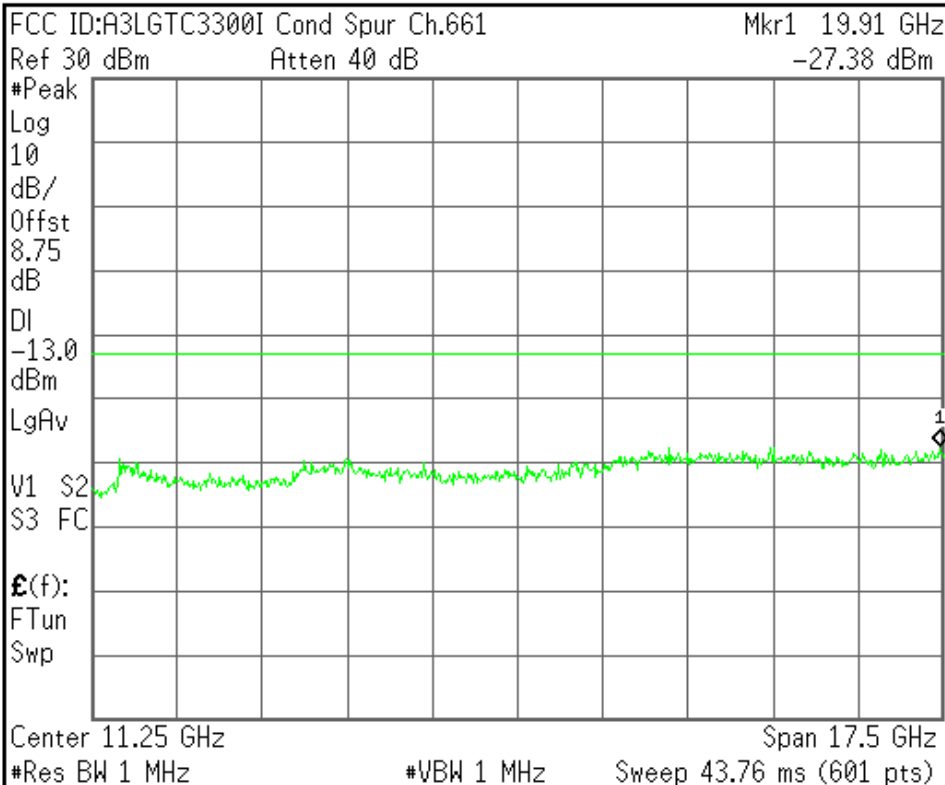

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Cond Spur Ch.810

Mkr1 1.076 GHz

Ref 30 dBm

Atten 40 dB

-32.94 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

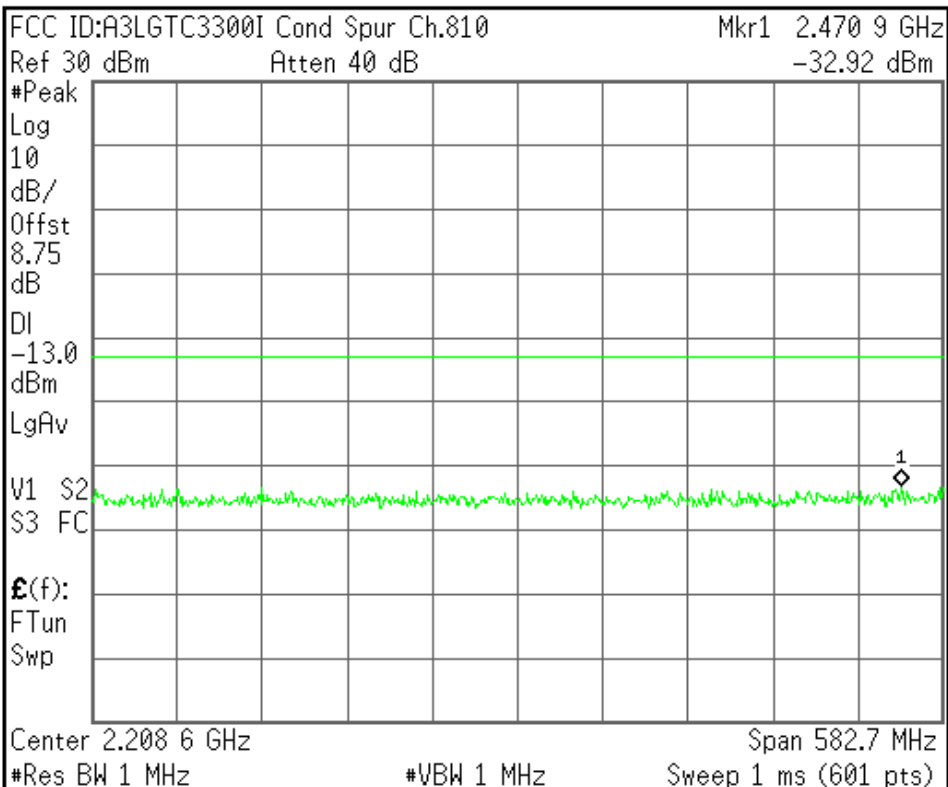

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

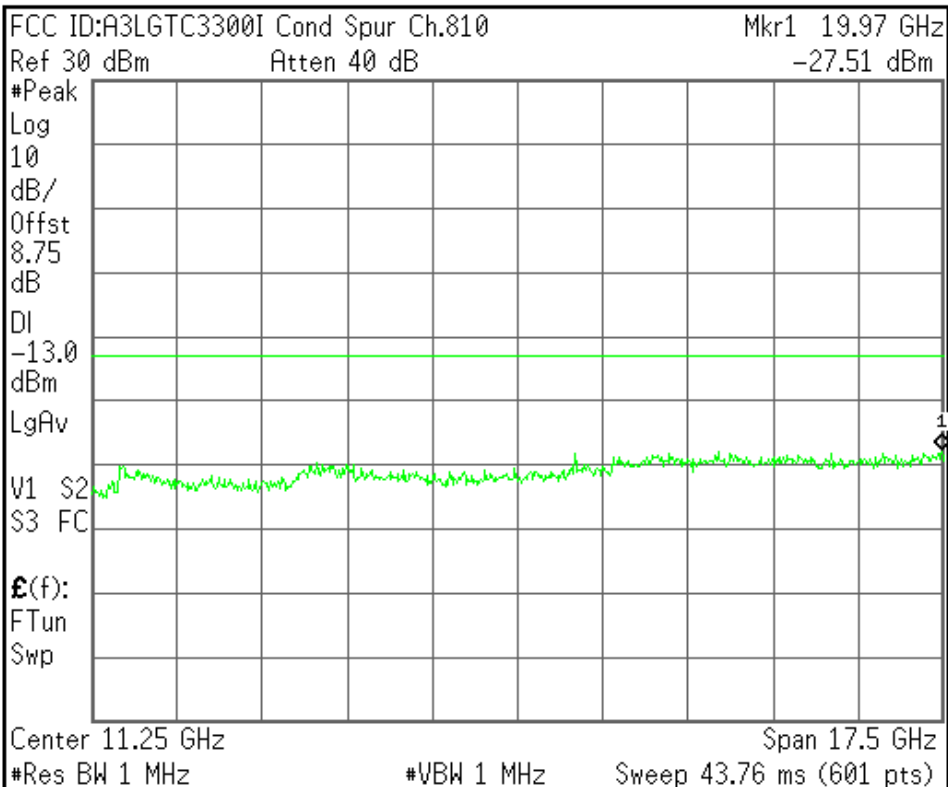

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTC3300I Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

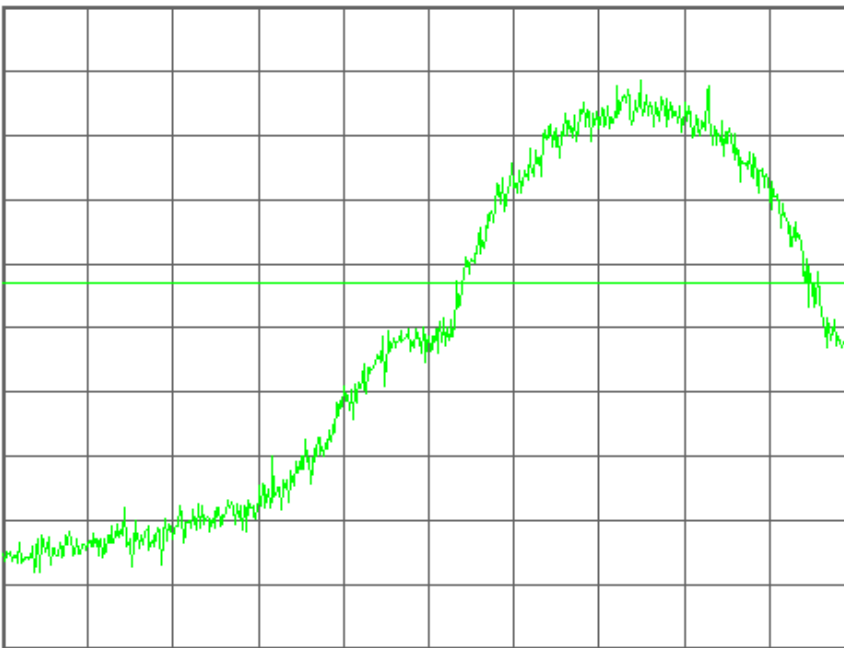

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

1.85000000 GHz

Start Freq

1.84959500 GHz

Stop Freq

1.85040500 GHz

CF Step

81.00000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTC3300I Band Edge Ch.512

Mkr1 1.849 996 0 GHz

Ref 30 dBm

Atten 40 dB

-18.61 dBm

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

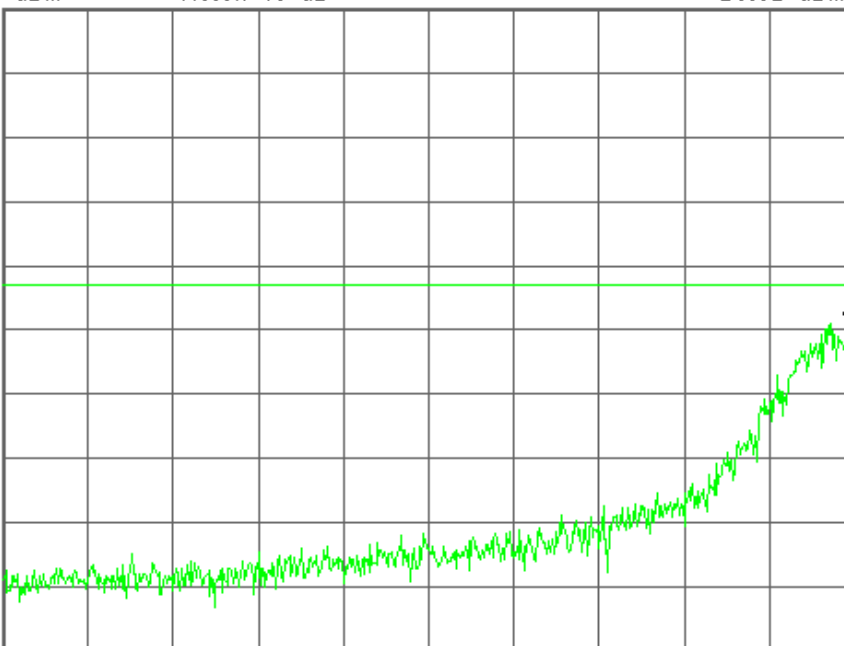

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

1.84959500 GHz

Start Freq

1.84919000 GHz

Stop Freq

1.85000000 GHz

CF Step

81.00000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

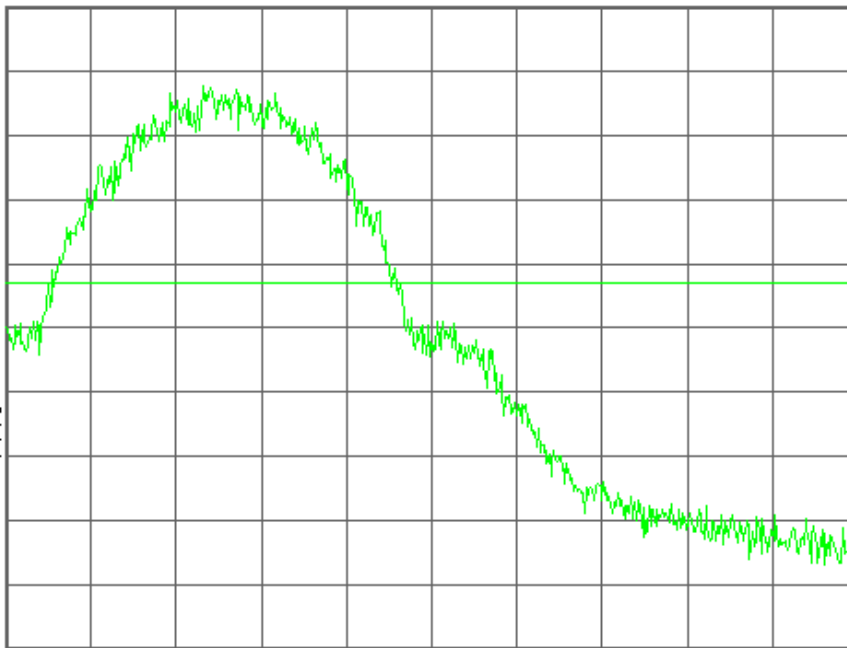

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3L6TC3300I Band Edge Ch.810

Mkr1 1.910 010 6 GHz

Ref 30 dBm

Atten 40 dB

-17.92 dBm

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

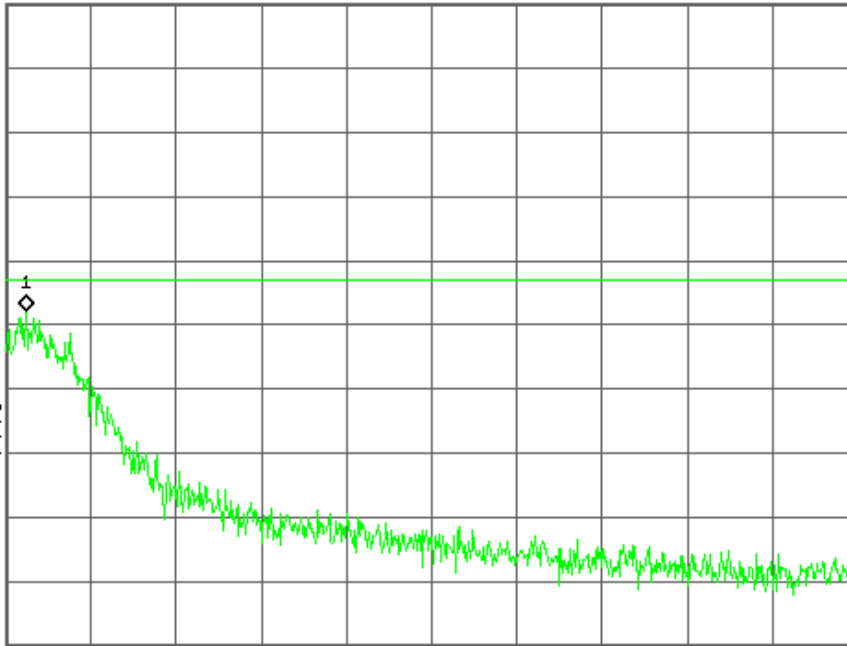

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

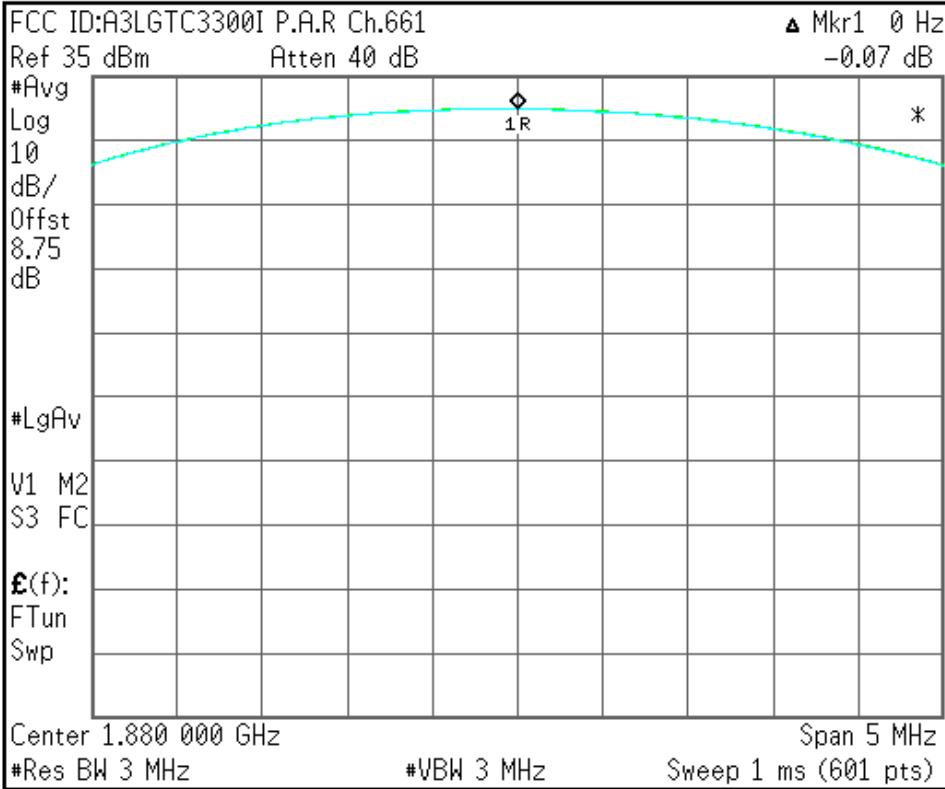

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved