



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **GT-I6410**
FCC ID(Requested) : **A3LGTI6410**
Report No : **FG-248-R1**
Job No : **FG-248**
Date issued : **September 21, 2009**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.).....	16
6.4. GSM850 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement.....	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph.....	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph.....	25
7. CONCLUSION.....	27
8. TEST PLOTS.....	28



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTI6410
- Model : GT-I6410
- Quantity : Quantity production is planned
- Emission Designators : 249KGXW(GSM850), 249KG7W(GSM850 EDGE)
246KGXW(GSM1900), 246KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.322 W ERP GSM850 (25.08 dBm)
1.459 W EIRP GSM1900 (31.64 dBm)
0.131 W ERP GSM850 EDGE(21.18 dBm)
0.887 W EIRP GSM1900 EDGE(29.48 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : September 1-2, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-248-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

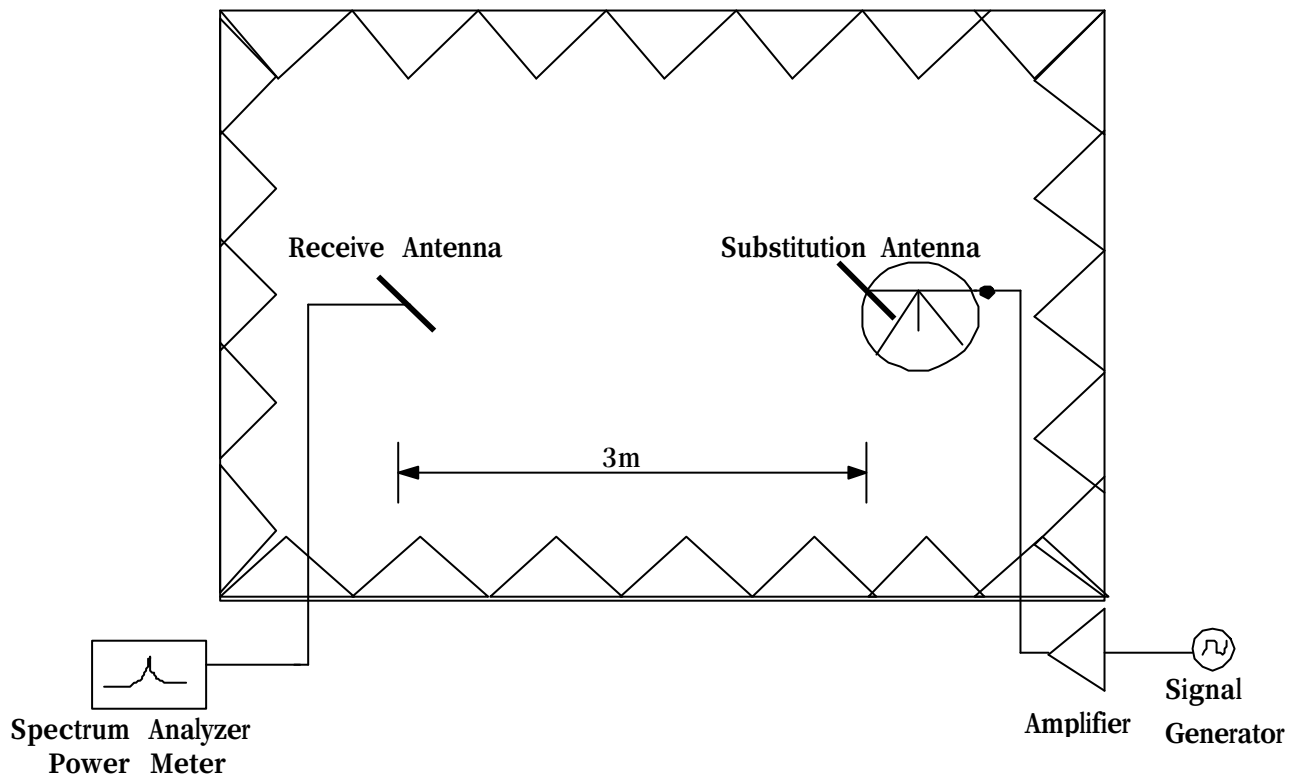


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

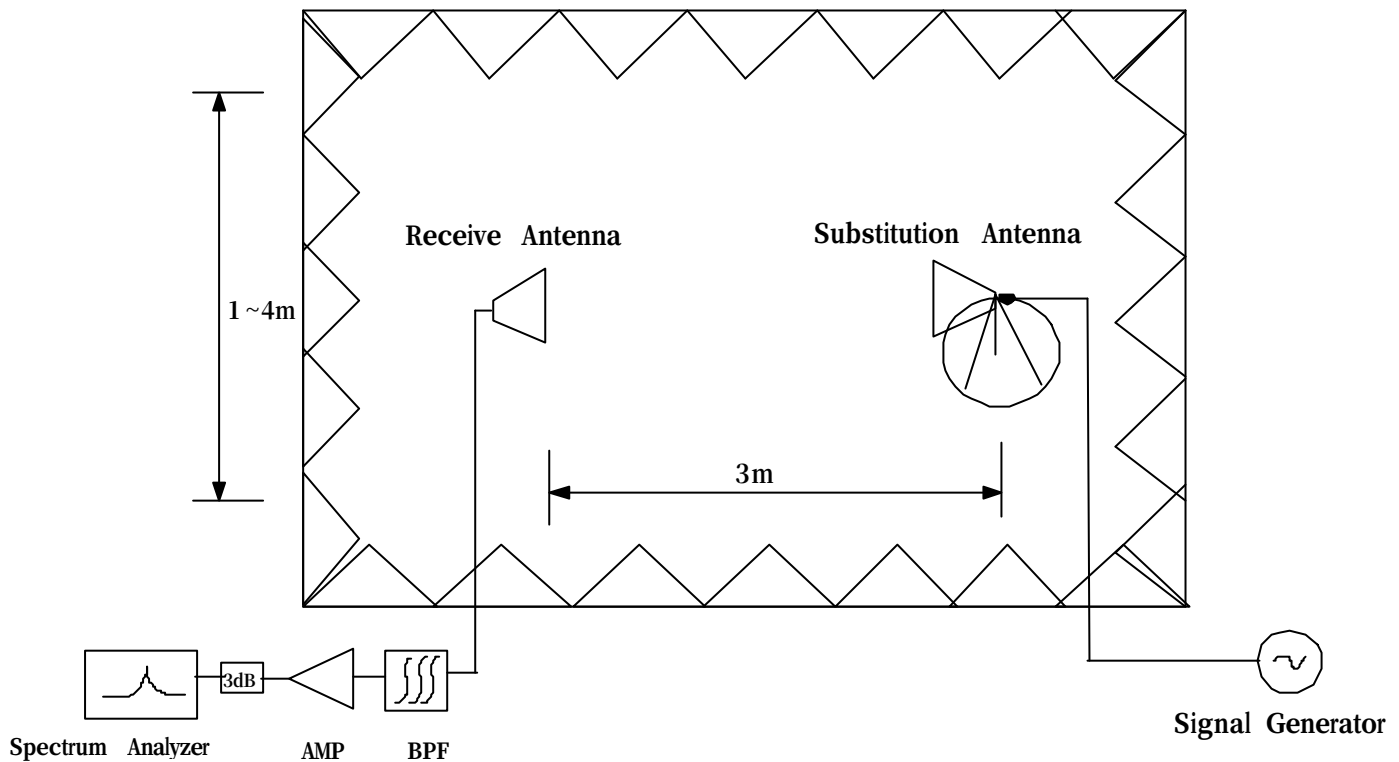


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.322 \text{ W}) = 38.08 \text{ dB}$$

$$25.08 \text{ dBm} - 38.08 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS Phone with Bluetooth FCC ID: A3LGTI6410. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.48	29.52	29.25	26.58	25.50
	661	29.79	29.77	29.53	26.86	25.78
	810	29.52	29.48	29.24	26.61	25.53
Cellular	128	32.66	32.62	32.40	29.61	28.20
	190	32.64	32.57	32.34	29.55	28.14
	251	32.68	32.61	32.38	29.55	28.14

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	24.00	H	-12.46	-0.67	-11.79
		V	-12.67	-0.67	-12.00
836.60	24.00	H	-13.94	-0.73	-13.21
		V	-13.44	-0.73	-12.71
848.80	25.00	H	-15.66	-0.79	-14.87
		V	-14.36	-0.79	-13.57

■Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-12.20	H	283/100	23.59	0.229	Standard
836.60	-13.33	H	285/115	23.88	0.244	Standard
848.80	-14.79	H	79/0	25.08	0.322	Standard

■EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-18.68	H	79/0	21.18	0.131	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	30.00	H	-8.75	9.70	-18.45
		V	-8.38	9.70	-18.08
1880.00	31.00	H	-8.11	9.70	-17.81
		V	-8.11	9.70	-17.81
1909.80	32.00	H	-7.11	9.70	-16.81
		V	-6.80	9.70	-16.50

■Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-18.40	H	17/180	30.05	1.012	Standard
1880.00	-17.46	V	47/100	31.35	1.365	Standard
1909.80	-17.17	H	344/0	31.64	1.459	Standard

■EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1909.80	-19.33	H	344/0	29.48	0.887	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 25.08 dBm = 0.322 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 38.08 \text{ dBc}$

■Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-50.73	V	63.85
	3	2472.60	-62.04	H	70.56
	4	3296.80	-67.24	V	72.03
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-50.21	H	62.05
	3	2509.80	-62.49	V	71.07
	4	3346.40	-66.49	H	71.25
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-50.17	V	62.64
	3	2546.40	-64.76	V	72.04
	4	3395.20	-66.81	H	71.86
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 31.64 dBm = 1.459 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 44.64 \text{ dBc}$

■Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-62.16	H	69.61
	3	5550.60	-66.43	H	68.14
	4	7400.80	-63.30	V	60.73
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-63.82	H	71.13
	3	5640.00	-67.36	H	68.72
	4	7520.00	-61.41	V	58.85
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-63.85	V	69.56
	3	5729.40	-67.49	V	68.39
	4	7639.20	-59.48	V	56.43
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 09. 02

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+2.14 - (-13 +⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-52.31	-50.73	65.29	63.85
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-62.04	-62.86	70.56	71.63
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-67.56	-67.24	72.82	72.03
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-50.21	-50.46	62.69	62.05
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-63.71	-62.49	72.24	71.07
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-66.49	-67.34	71.25	71.96
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-50.89	-50.17	63.16	62.64
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-64.98	-64.76	73.62	72.04
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-66.81	-67.88	71.86	72.64
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 09. 02

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-62.16	-67.89	69.61	75.71
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-66.43	-66.75	68.14	68.34
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-65.35	-63.30	62.41	60.73
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-63.82	-63.95	71.13	71.29
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-67.36	-67.41	69.02	68.72
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-65.22	-61.41	62.49	58.85
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-63.99	-63.85	70.36	69.56
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-67.56	-67.49	68.47	68.39
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-63.28	-59.48	60.38	56.43
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	32.40	836,600,032	0.000004	0.039
100%		-30	-29.70	836,599,970	-0.000004	-0.036
100%		-20	-38.90	836,599,961	-0.000005	-0.046
100%		-10	-12.60	836,599,987	-0.000002	-0.015
100%		0	15.00	836,600,015	0.000002	0.018
100%		+10	-42.20	836,599,958	-0.000005	-0.050
100%		+20	32.40	836,600,032	0.000004	0.039
100%		+30	-7.20	836,599,993	-0.000001	-0.009
100%		+40	44.00	836,600,044	0.000005	0.053
100%		+50	-31.70	836,599,968	-0.000004	-0.038
100%		+60	49.60	836,600,050	0.000006	0.059
85%	3.35	+20	38.00	836,600,038	0.000005	0.045
115%	4.26	+20	-41.00	836,599,959	-0.000005	-0.049
Batt.Endpoint	3.35	+20	38.00	836,600,038	0.000005	0.045


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

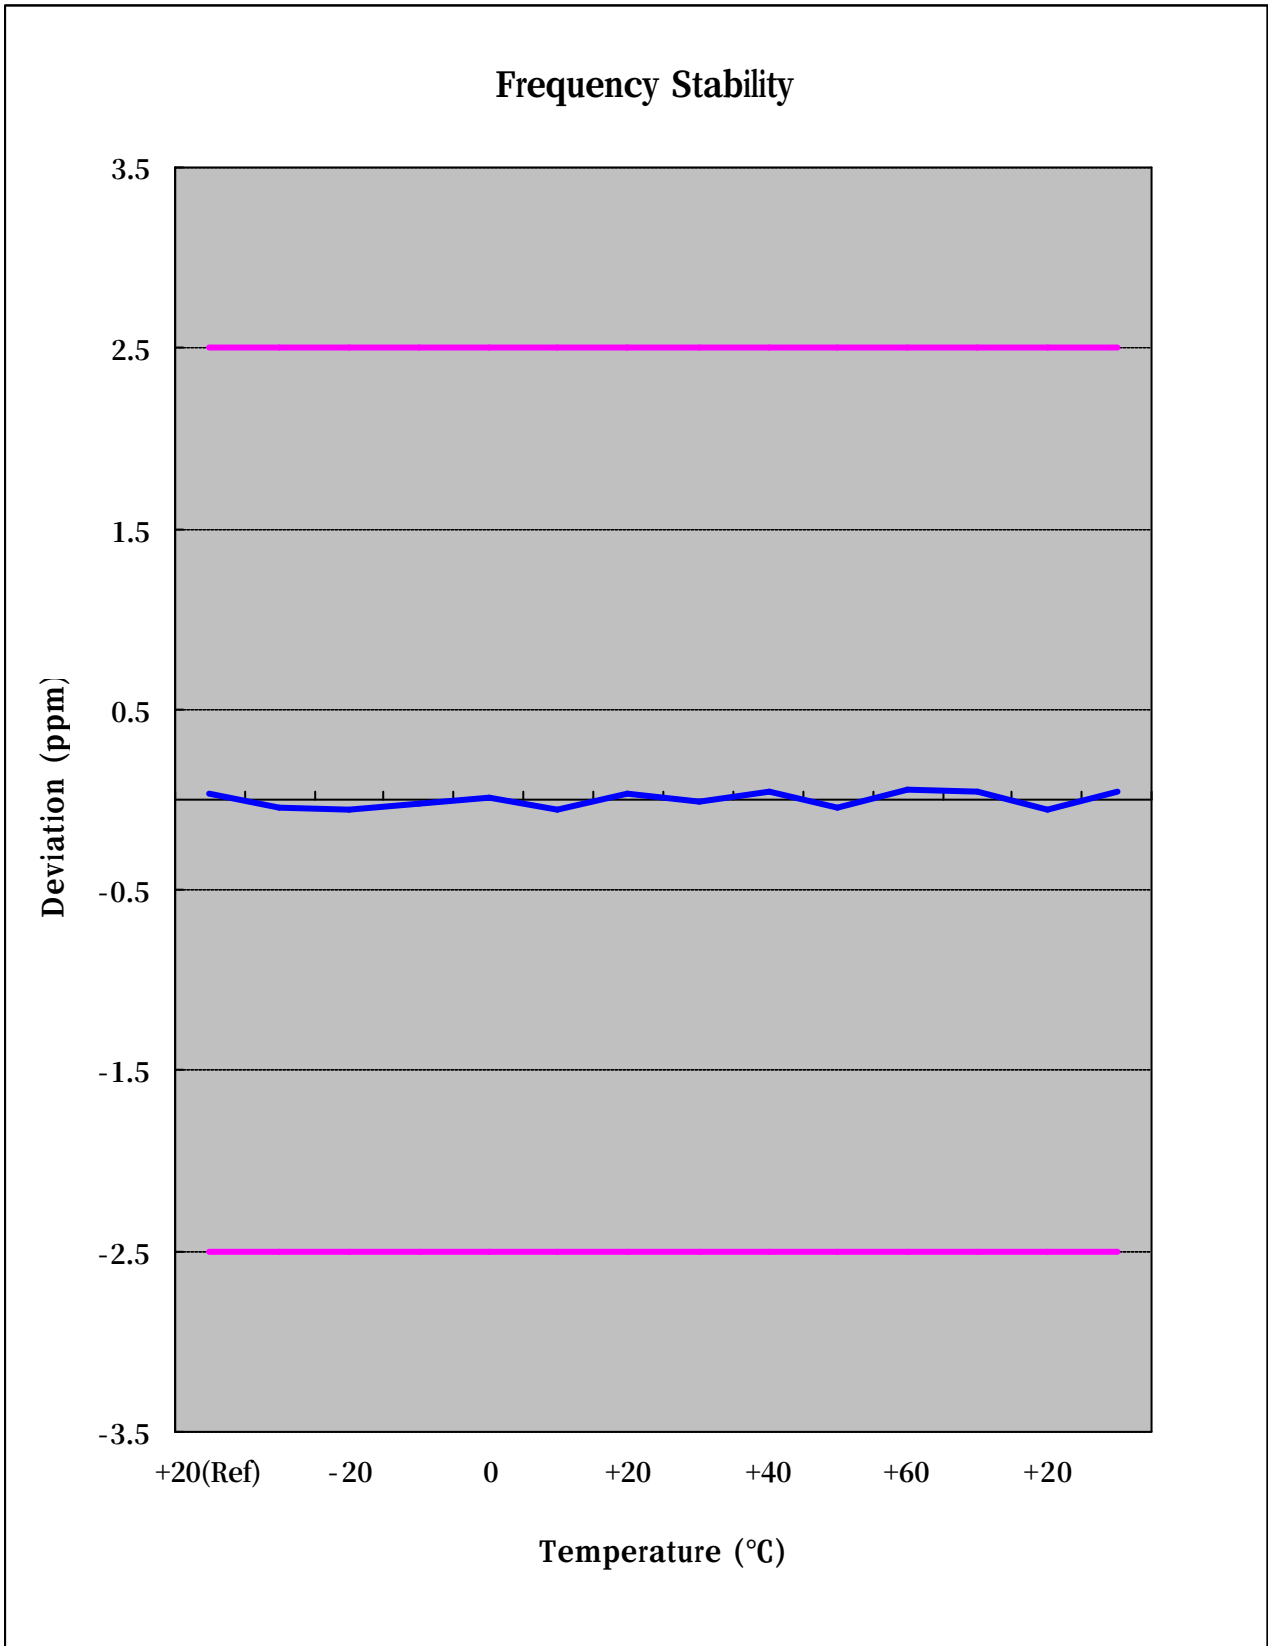

Zoom IN

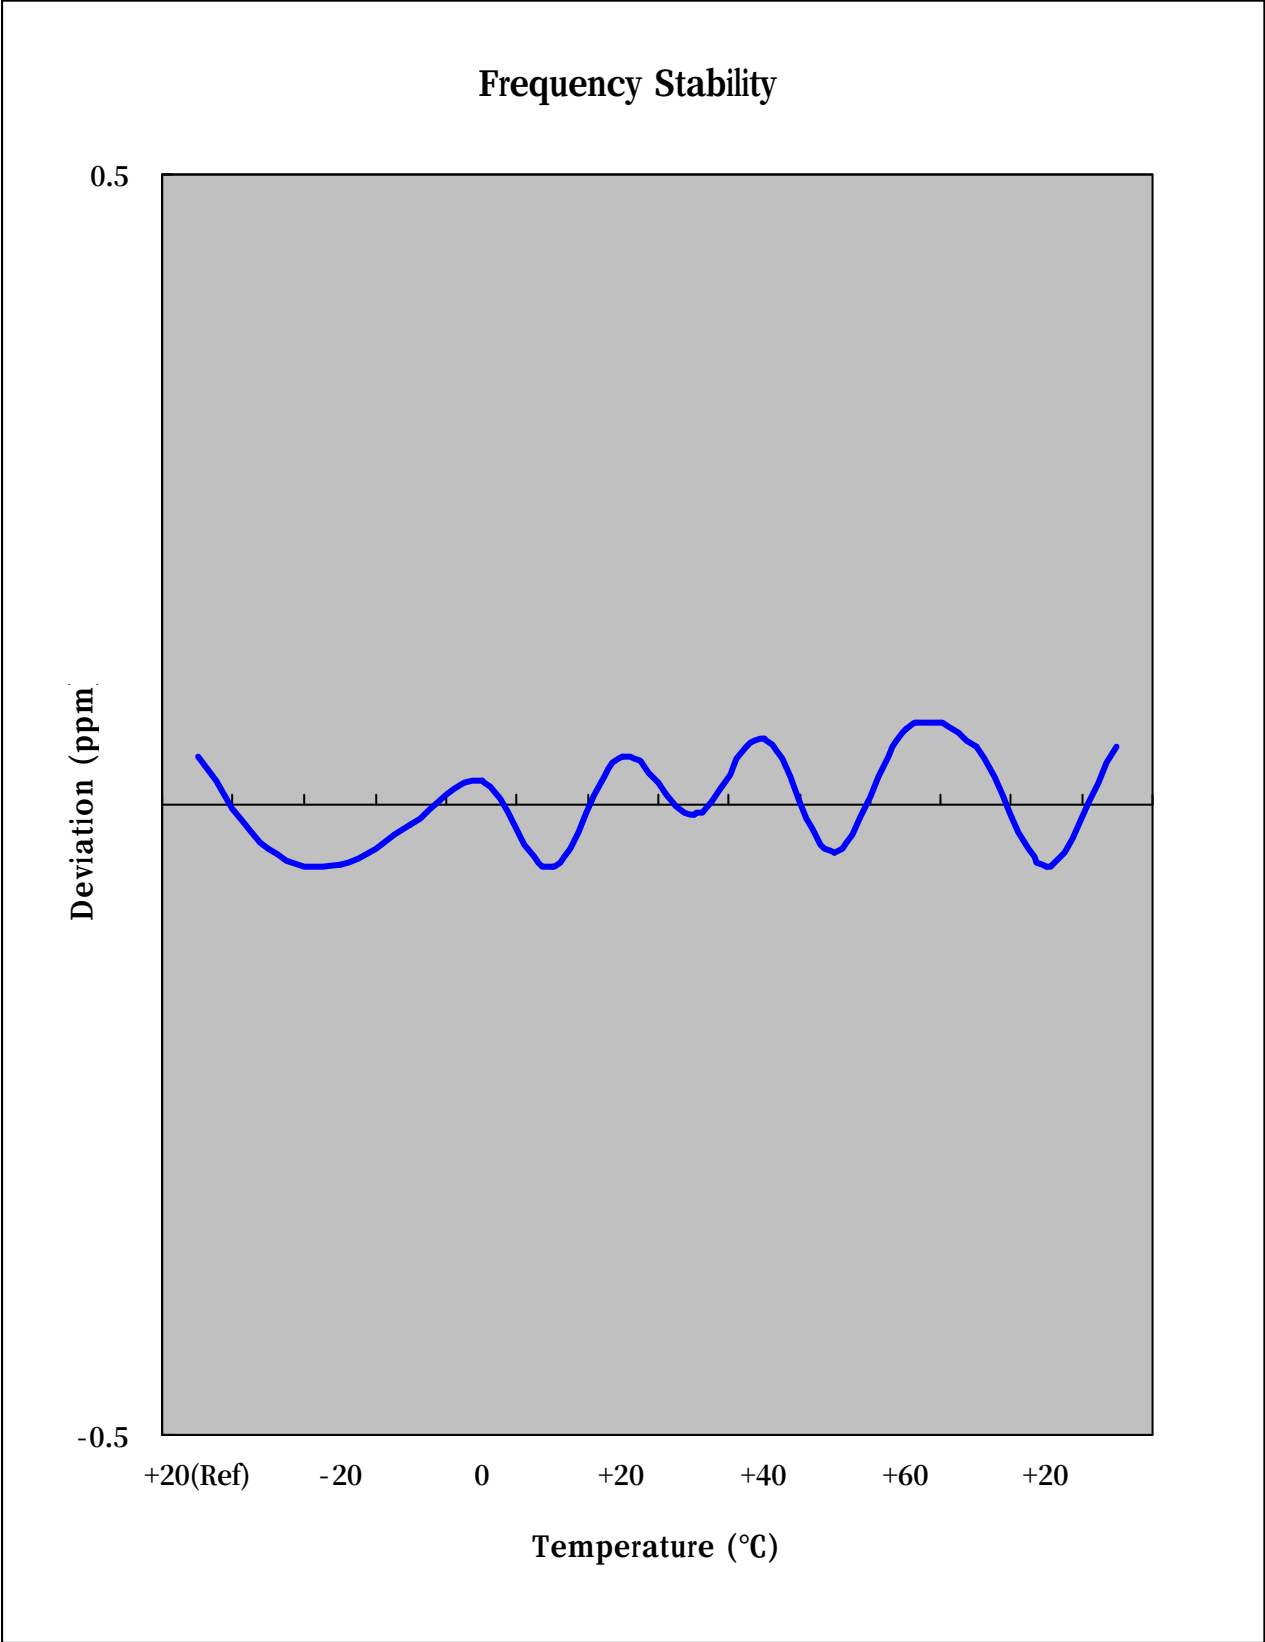

6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	3.40	1,880,000,003	0.000000	0.002
100%		-30	9.70	1,880,000,010	0.000001	0.005
100%		-20	21.50	1,880,000,022	0.000001	0.011
100%		-10	-49.20	1,879,999,951	-0.000003	-0.026
100%		0	-11.60	1,879,999,988	-0.000001	-0.006
100%		+10	31.60	1,880,000,032	0.000002	0.017
100%		+20	3.40	1,880,000,003	0.000000	0.002
100%		+30	-44.60	1,879,999,955	-0.000002	-0.024
100%		+40	6.70	1,880,000,007	0.000000	0.004
100%		+50	39.20	1,880,000,039	0.000002	0.021
100%		+60	27.60	1,880,000,028	0.000001	0.015
85%	3.35	+20	0.50	1,880,000,001	0.000000	0.000
115%	4.26	+20	12.00	1,880,000,012	0.000001	0.006
Batt.Endpoint	3.35	+20	0.50	1,880,000,001	0.000000	0.000


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

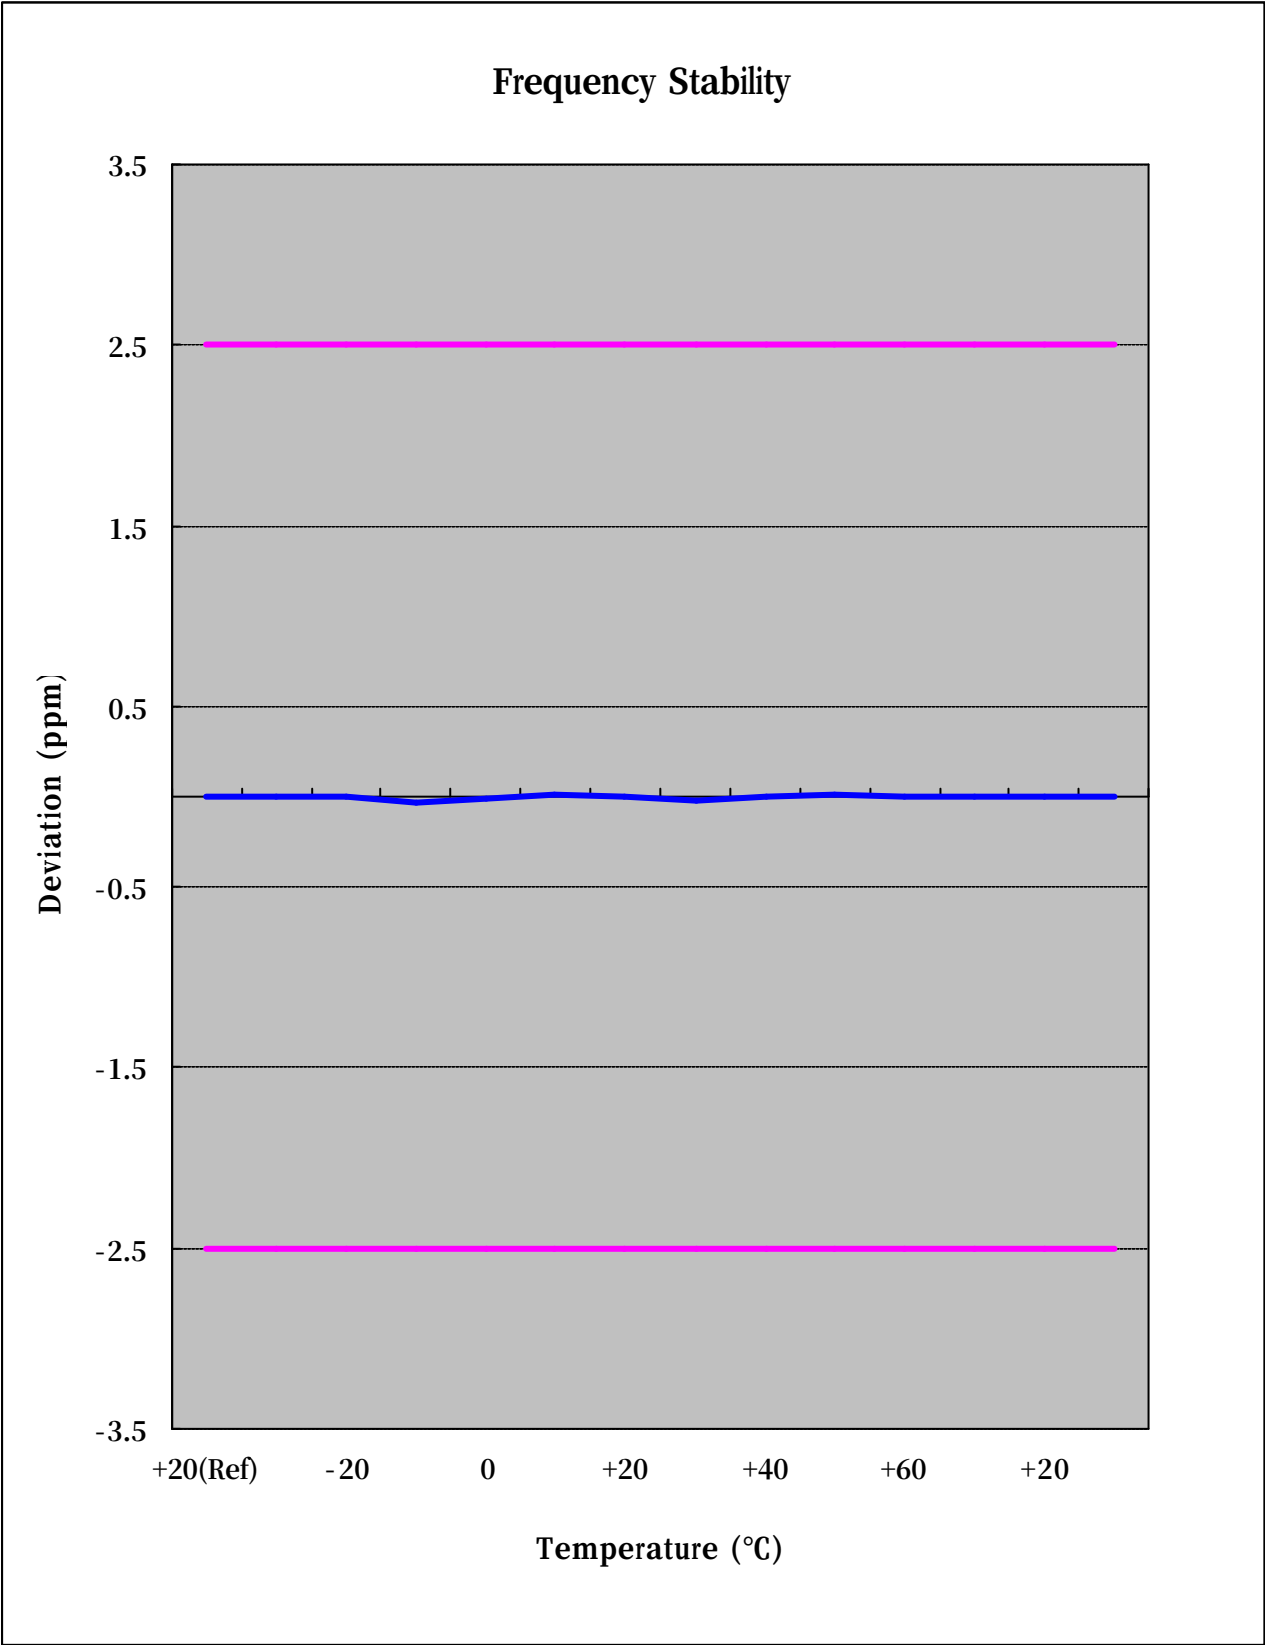

Zoom IN

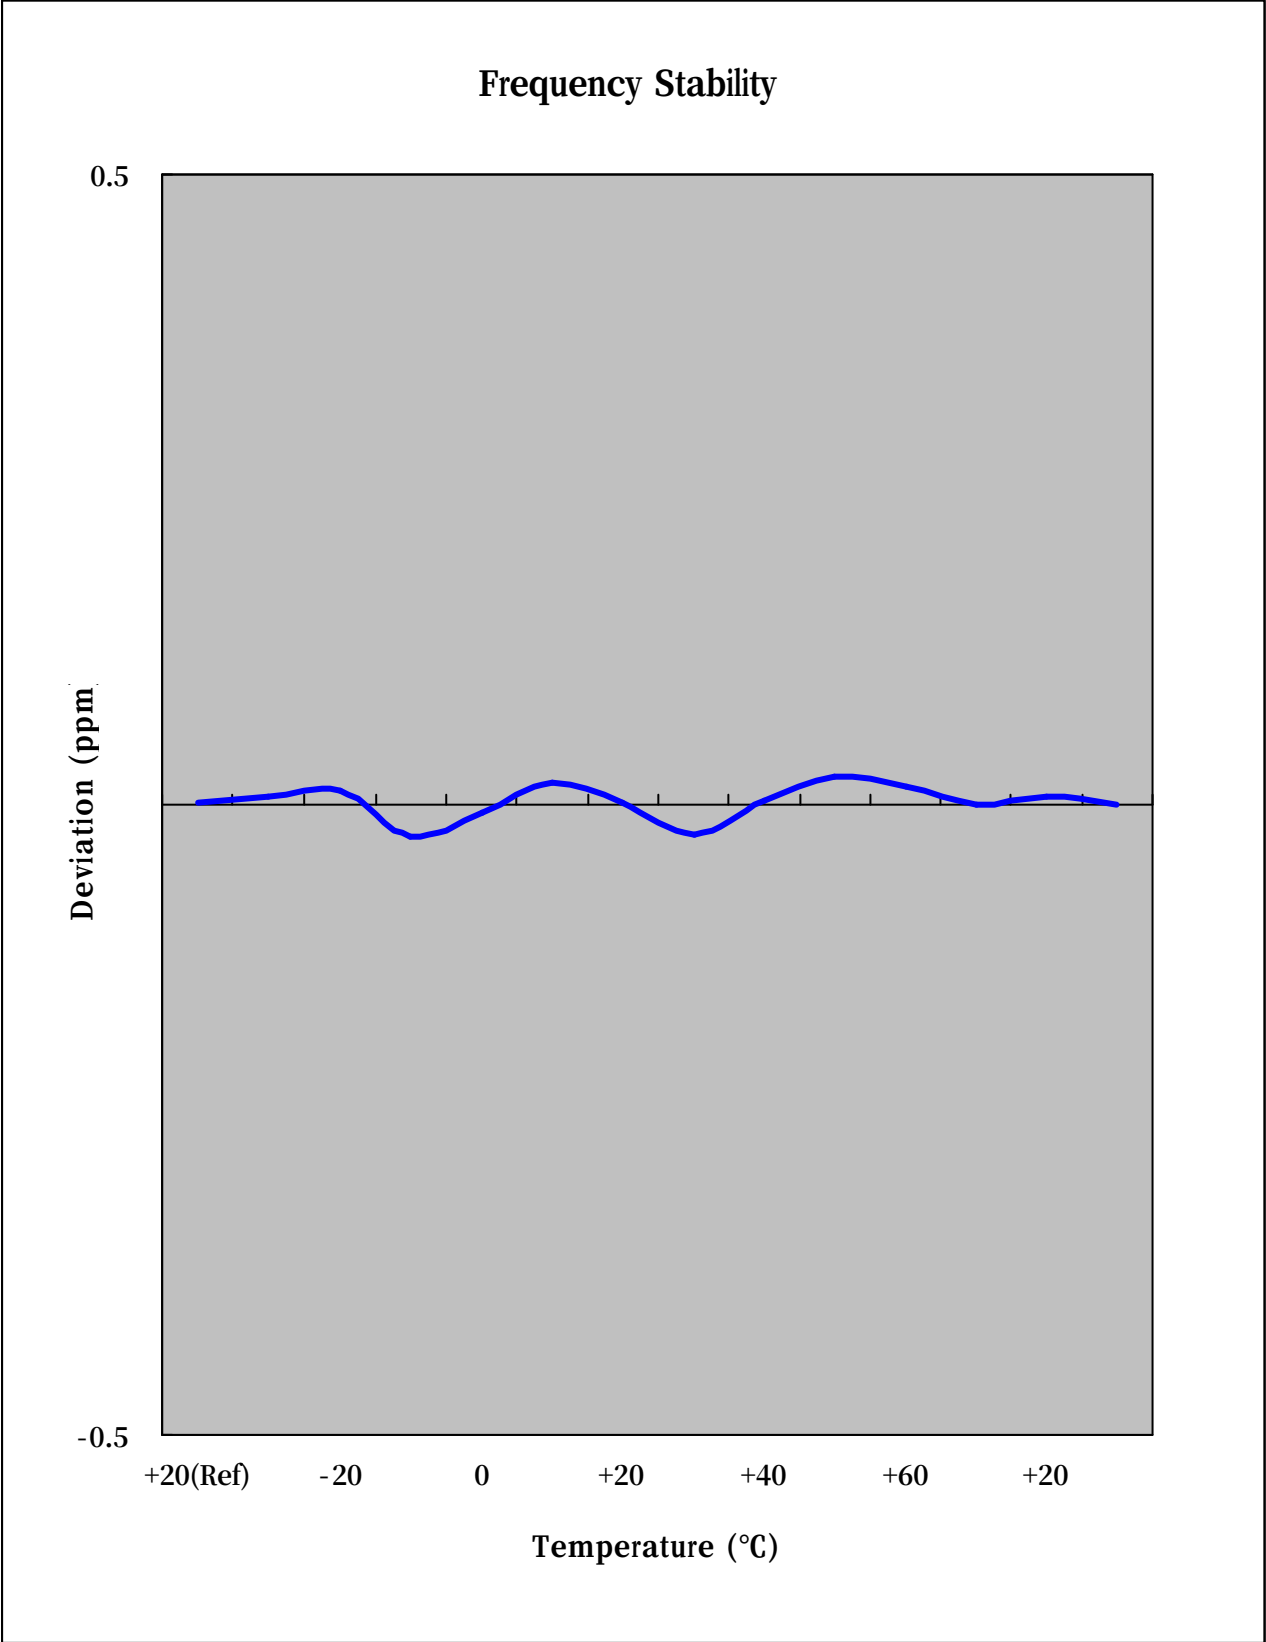



7. CONCLUSION


The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS Phone with Bluetooth. FCC ID : A3LGTI6410 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850


Agilent


R T

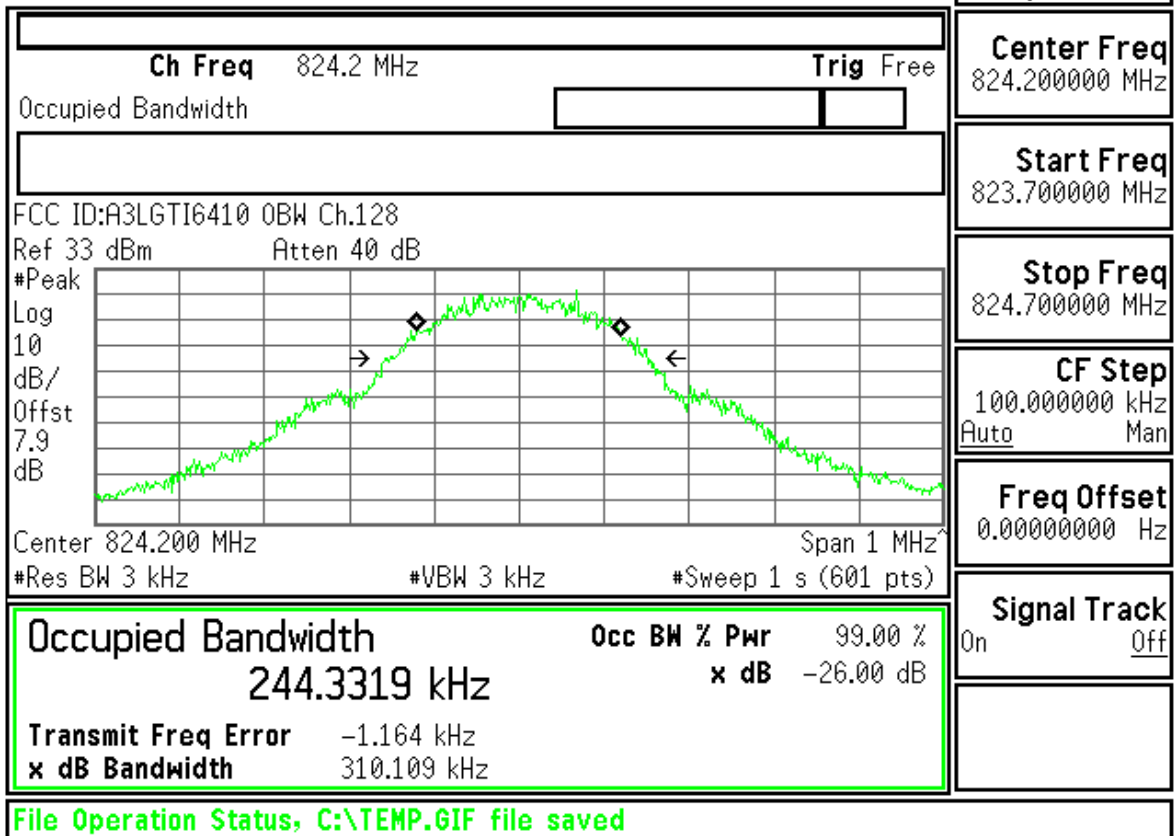

Agilent

R T

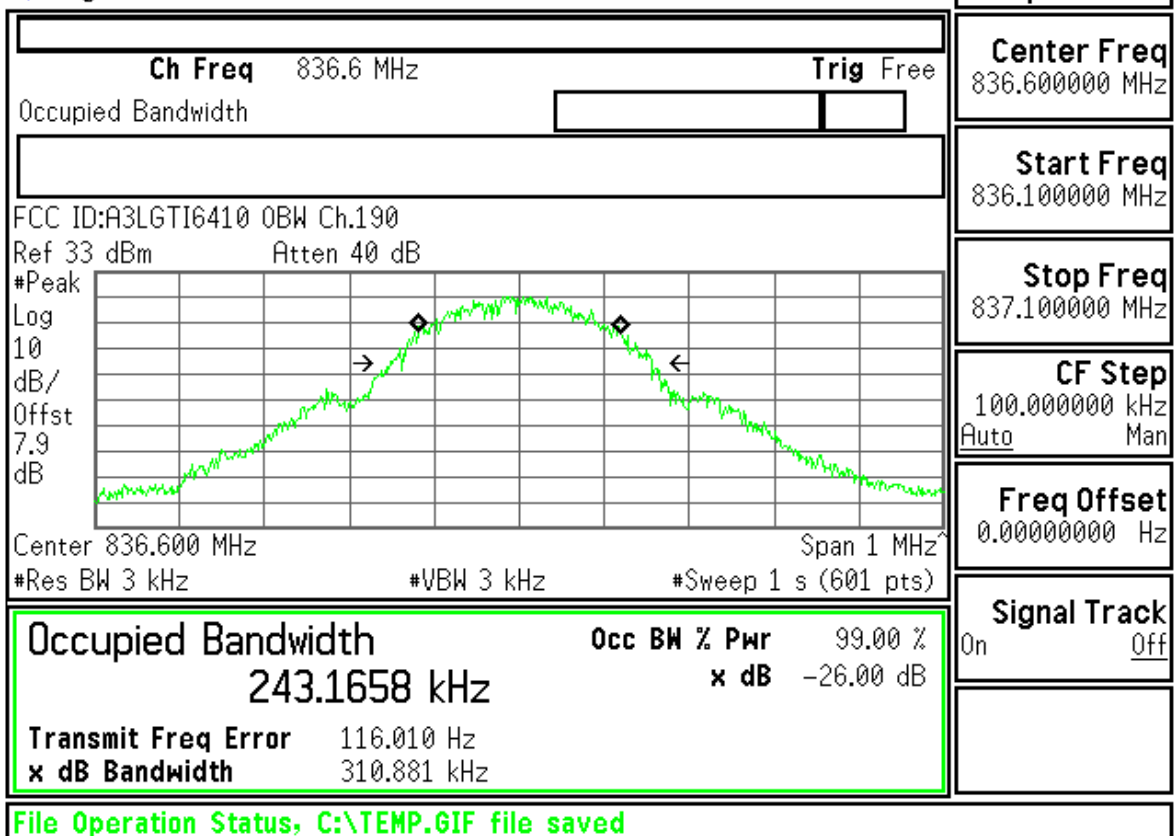

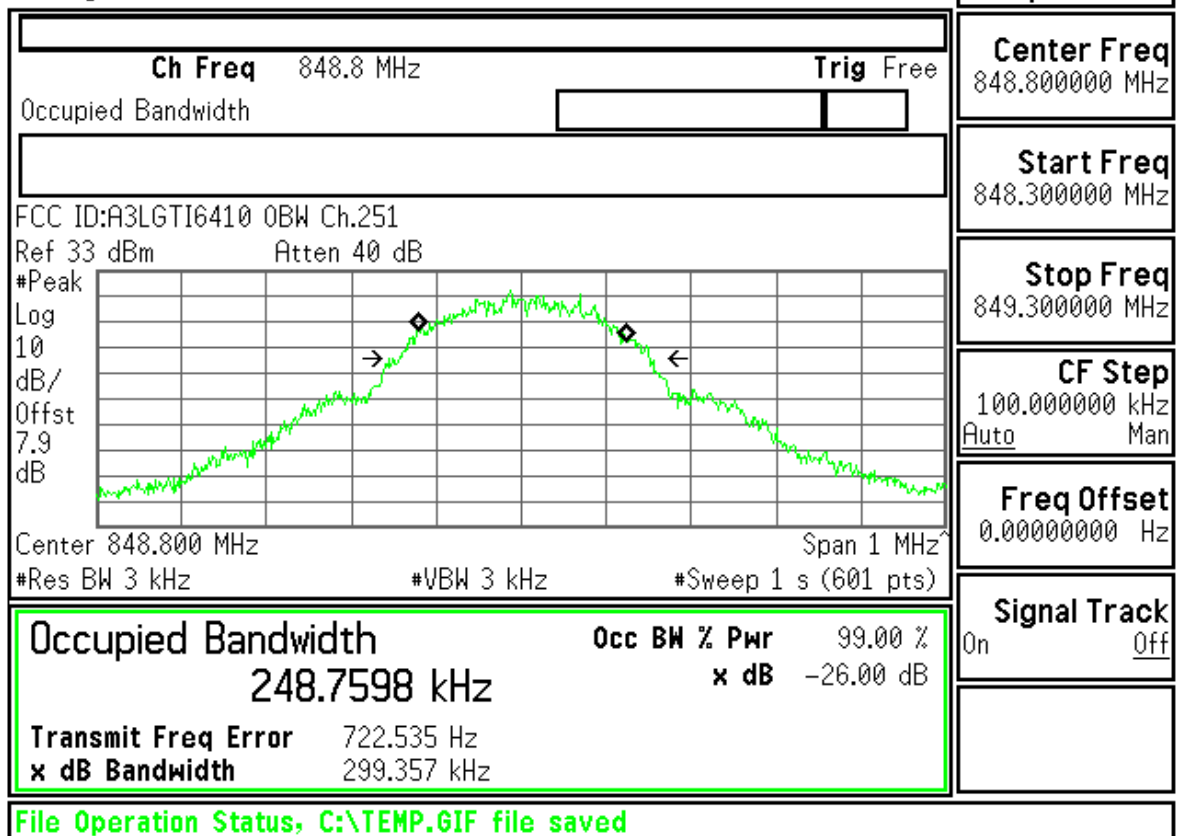

Freq/Channel
Center Freq 848.800000 MHz
Start Freq 848.300000 MHz
Stop Freq 849.300000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


Measurement/Instrument Screen																										
Control		Transmit Power								TCH Parms																
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.66</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.66</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.66	----	----	----	Estimated Carrier Power	32.66	----	----	----	Downlink Traffic Power ▾	
	Burst 1									Burst 2	Burst 3	Burst 4														
Burst Power	32.66									----	----	----														
Estimated Carrier Power	32.66									----	----	----														
Swap Window Positions		Traffic Band																								
		GS1850																								
		Traffic Channel																								
		128																								
1 of 2		Single								MS TX Level																
		5								Channel Mode Setup ▾																
		50 / 50								Return																
		Single																								
		Active Cell Connected				Sys Type: GSM																				
				IntRef		Offset		R T																		
										1 of 2																

Measurement/Instrument Screen																																					
Control		Transmit Power									TCH Parms																										
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.64</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.64</td><td>----</td><td>----</td><td>----</td></tr></table>										Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.64	----	----	----	Estimated Carrier Power	32.64	----	----	----	Downlink Traffic Power ▾											
												Burst 1	Burst 2	Burst 3	Burst 4																						
											Burst Power	32.64	----	----	----																						
											Estimated Carrier Power	32.64	----	----	----																						
											Traffic Band																										
GSM850																																					
Traffic Channel																																					
190																																					
MS TX Level																																					
5																																					
Channel Mode Setup ▾																																					
Return																																					
1 of 2																																					
Phase & Frequency Error																																					
Swap Window Positions		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td>2.50</td><td>1.12</td><td colspan="2">-17.56</td></tr><tr><td>Maximum</td><td>3.44</td><td>1.35</td><td colspan="2">-5.32</td></tr><tr><td>Average</td><td>2.88</td><td>1.23</td><td colspan="2">-12.20</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td colspan="2">Pass</td></tr></table>										Peak Phase °	RMS Phase °	Frequency Hz		Minimum	2.50	1.12	-17.56		Maximum	3.44	1.35	-5.32		Average	2.88	1.23	-12.20		Pass/Fail	Pass	Pass	Pass		Single	
												Peak Phase °	RMS Phase °	Frequency Hz																							
											Minimum	2.50	1.12	-17.56																							
											Maximum	3.44	1.35	-5.32																							
											Average	2.88	1.23	-12.20																							
Pass/Fail	Pass	Pass	Pass																																		
50 / 50																																					
Active Cell Connected		Sys Type: GSM																																			
IntRef		Offset		R T																																	
1 of 2																																					


Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.68</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.68</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.68	----	----	----	Estimated Carrier Power	32.68	----	----	----	Downlink Traffic Power						
	Burst 1	Burst 2	Burst 3	Burst 4																									
Burst Power	32.68	----	----	----																									
Estimated Carrier Power	32.68	----	----	----																									
		Single						Traffic Band																					
								GS1850																					
								Traffic Channel																					
								251																					
								MS TX Level																					
								5																					
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.37</td> <td>1.08</td> <td>-20.68</td> </tr> <tr> <td>Maximum</td> <td>3.52</td> <td>1.35</td> <td>-5.83</td> </tr> <tr> <td>Average</td> <td>2.91</td> <td>1.23</td> <td>-11.81</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.37	1.08	-20.68	Maximum	3.52	1.35	-5.83	Average	2.91	1.23	-11.81	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	2.37	1.08	-20.68																										
Maximum	3.52	1.35	-5.83																										
Average	2.91	1.23	-11.81																										
Pass/Fail	Pass	Pass	Pass																										
		50 / 50						Return																					
		Single																											
		Active Cell Connected				Sys Type: GSM																							
1 of 2				IntRef	Offset	R	T	1 of 2																					

Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power																					
Change View								Traffic Band																					
								GS1850																					
								Traffic Channel																					
								128																					
								MS TX Level																					
								5																					
		<table border="1"> <thead> <tr> <th>Burst</th> <th>TX Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.67</td> <td>GMSK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	TX Power (dBm)	Modulation	Mask	1	32.67	GMSK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Channel Mode Setup	
Burst	TX Power (dBm)	Modulation	Mask																										
1	32.67	GMSK	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
		Continuous						Return																					
		Active Cell Connected				Sys Type: GSM																							
1 of 2				IntRef	Offset	R	T	1 of 2																					


FCC ID : A3LGTI6410 GMSK Power vs Time 190CH

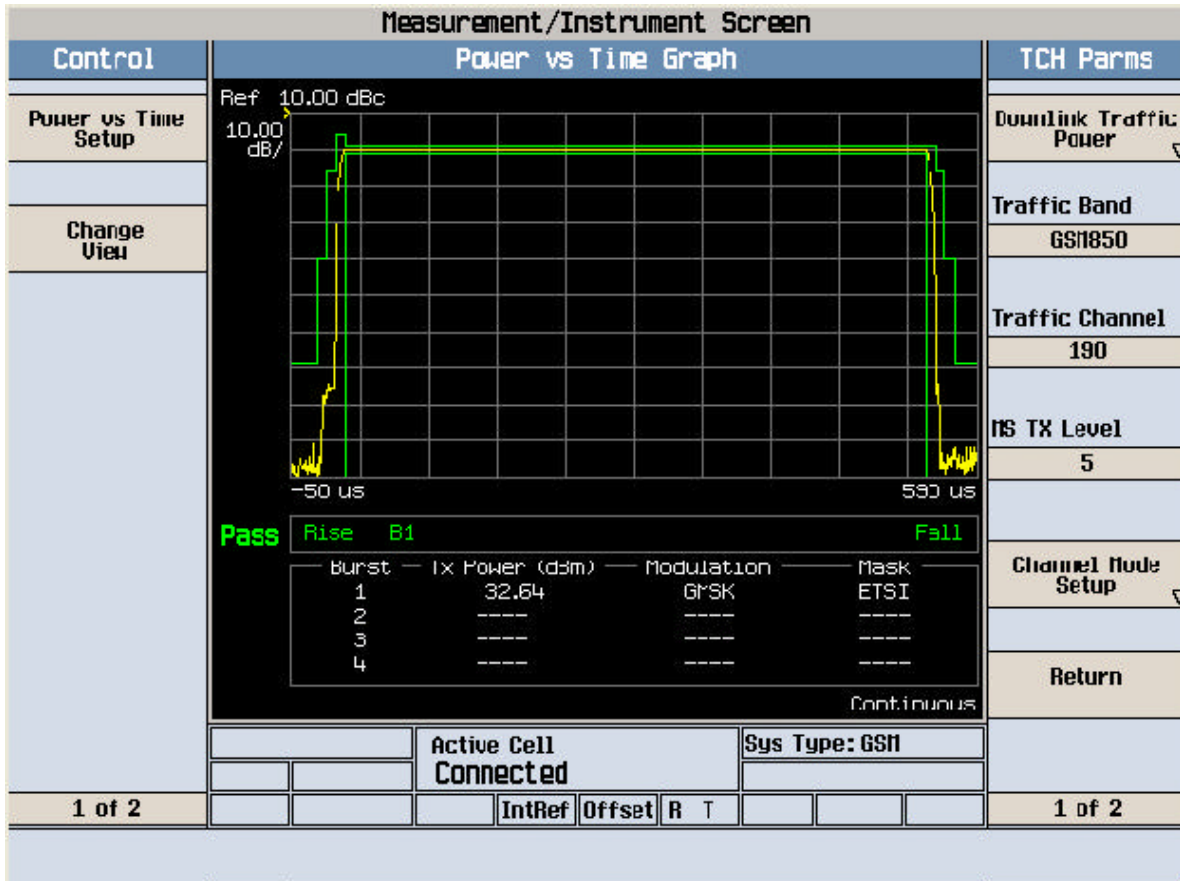


FCC ID : A3LGTI6410 GMSK Power vs Time 251CH

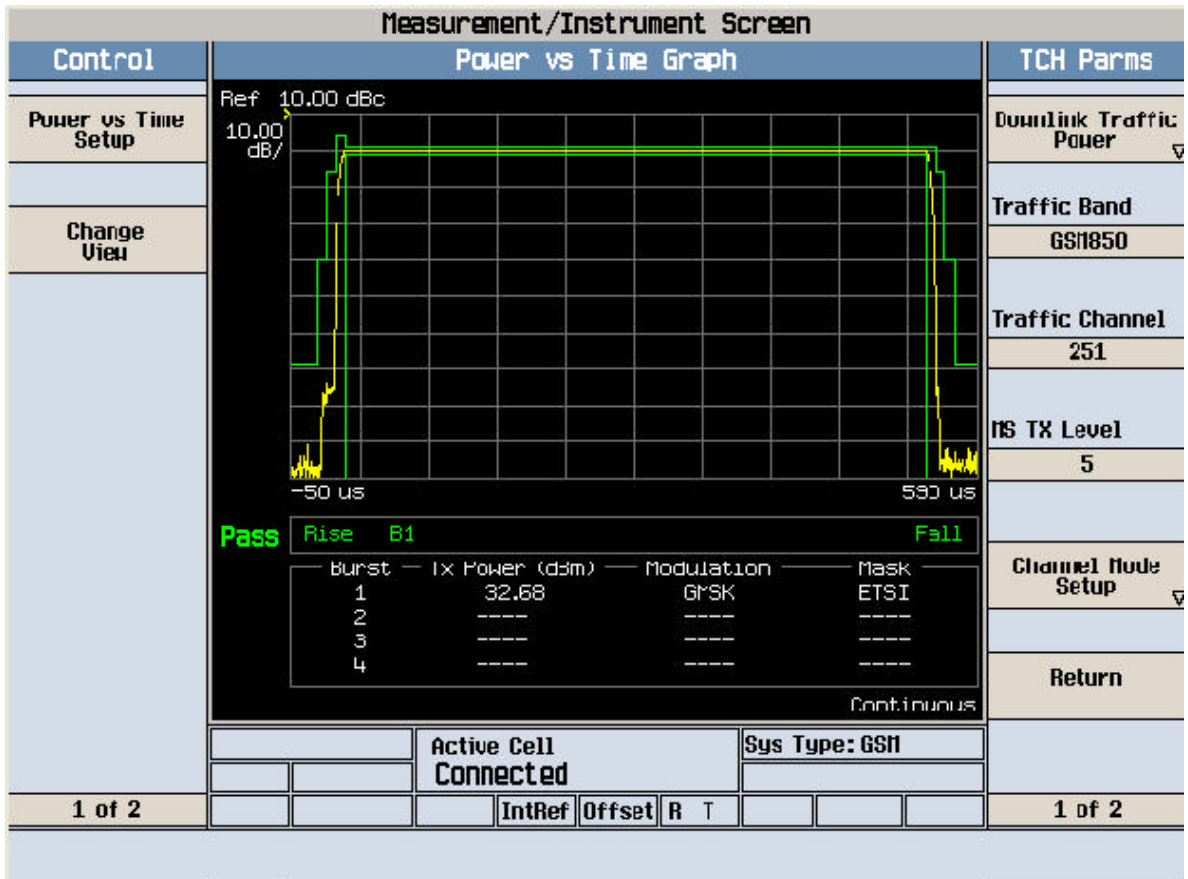




FCC ID : A3LGTI6410 Modulation & Switching 128CH


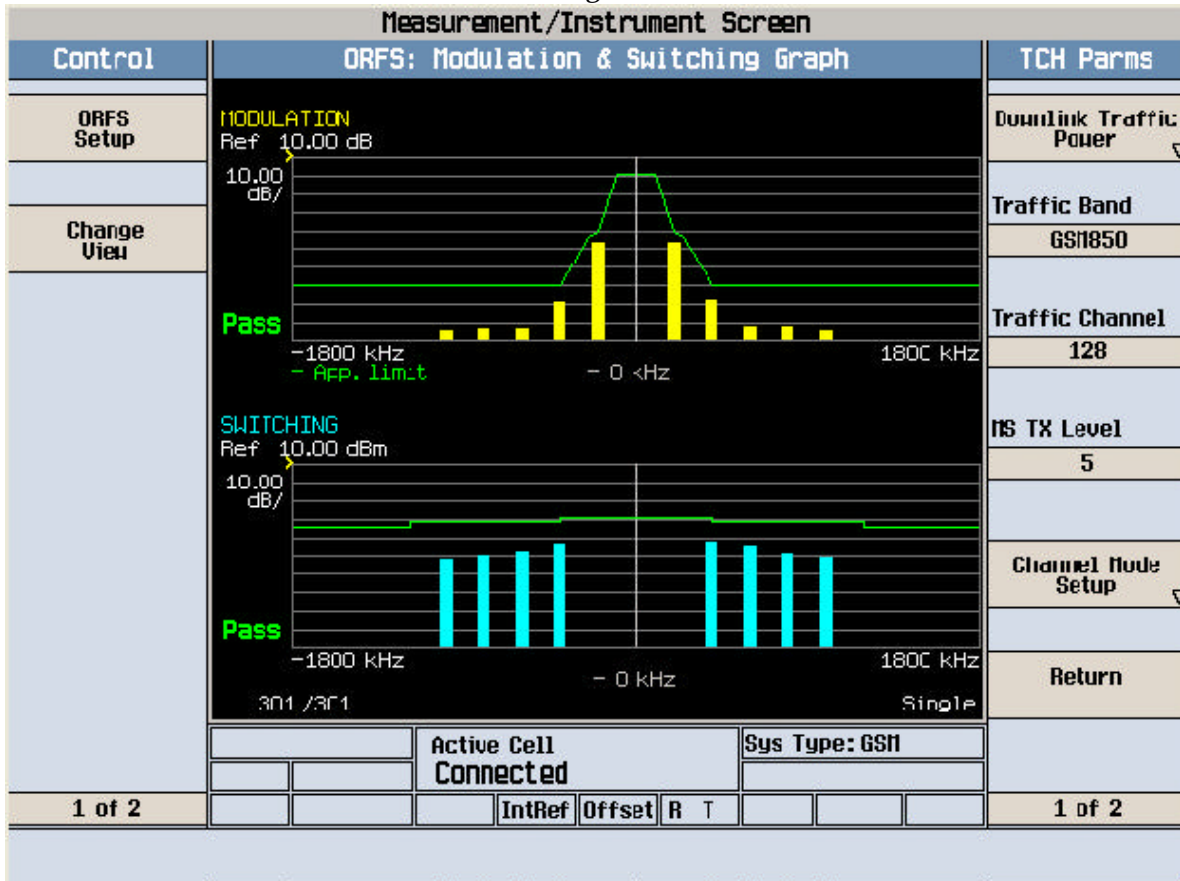




FCC ID : A3LGTI6410 Modulation & Switching 190CH


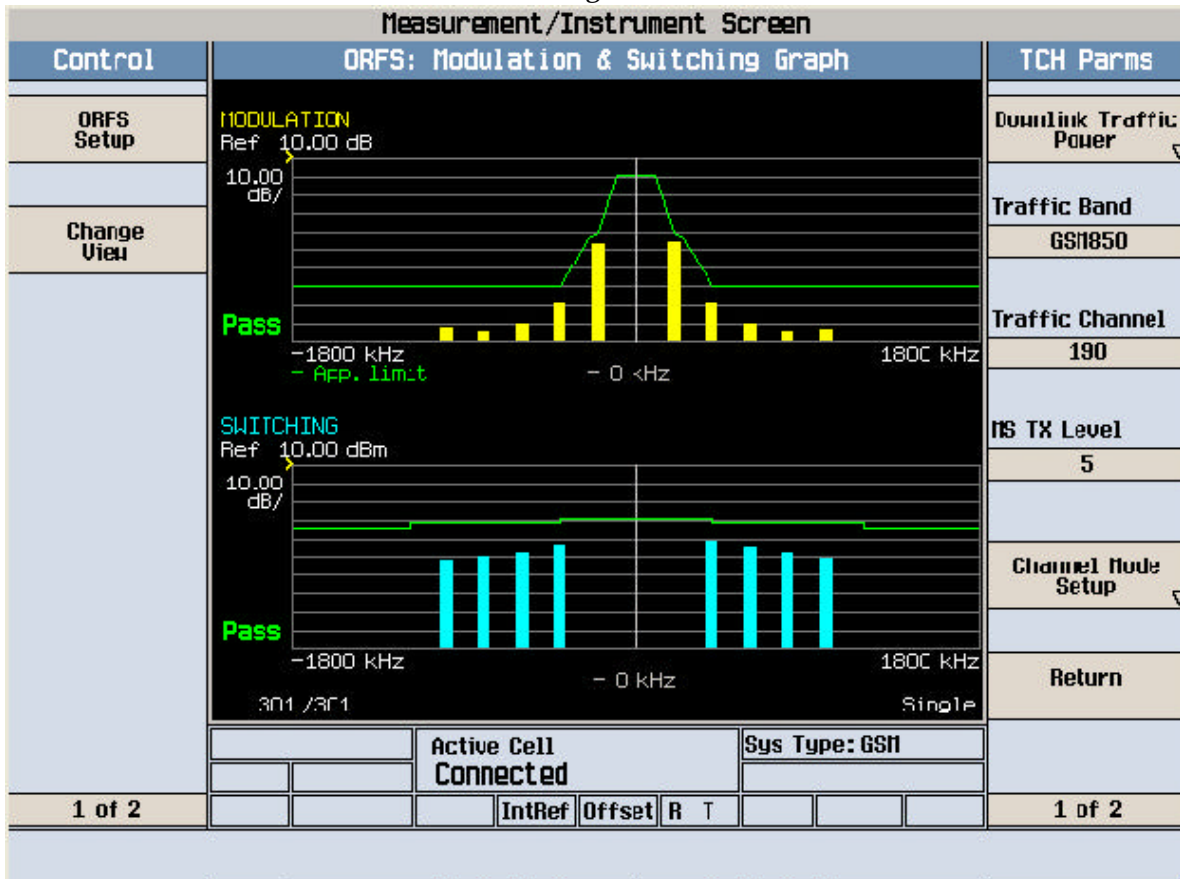



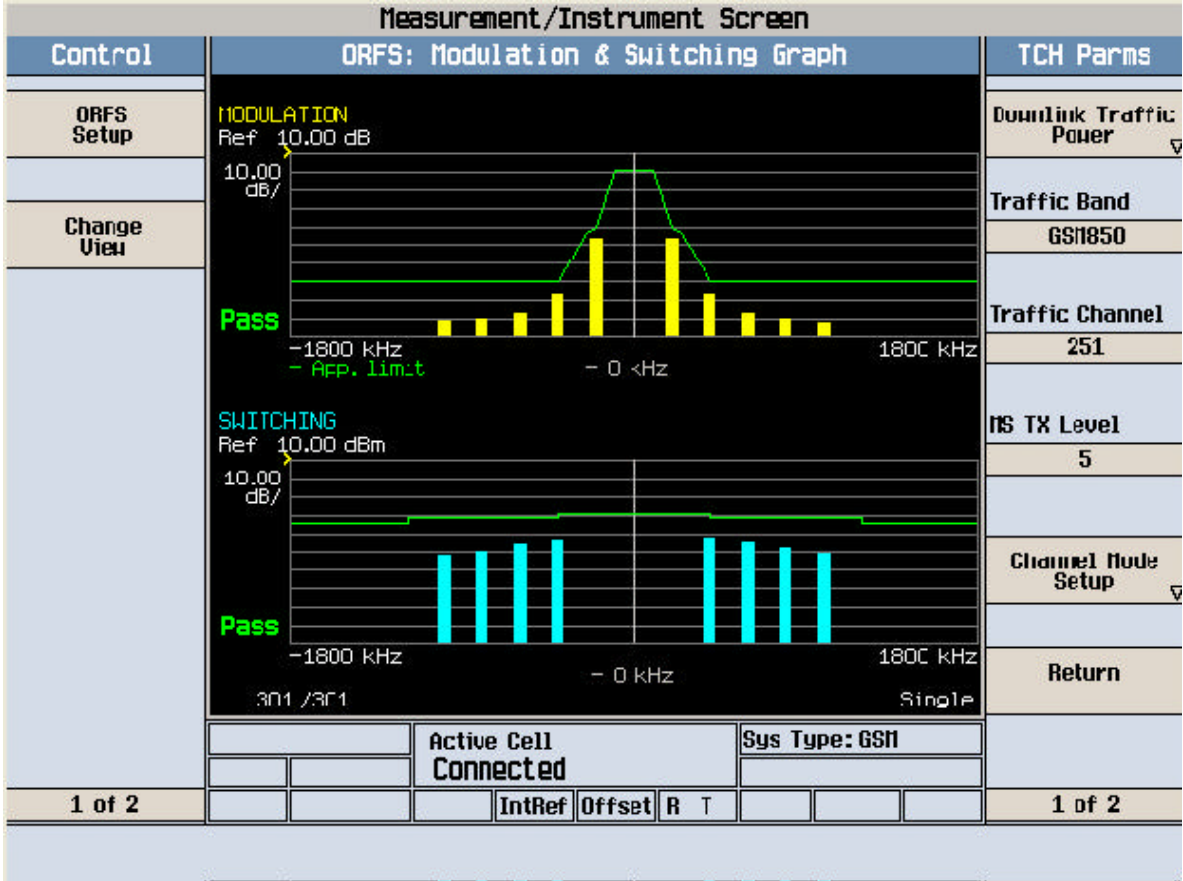


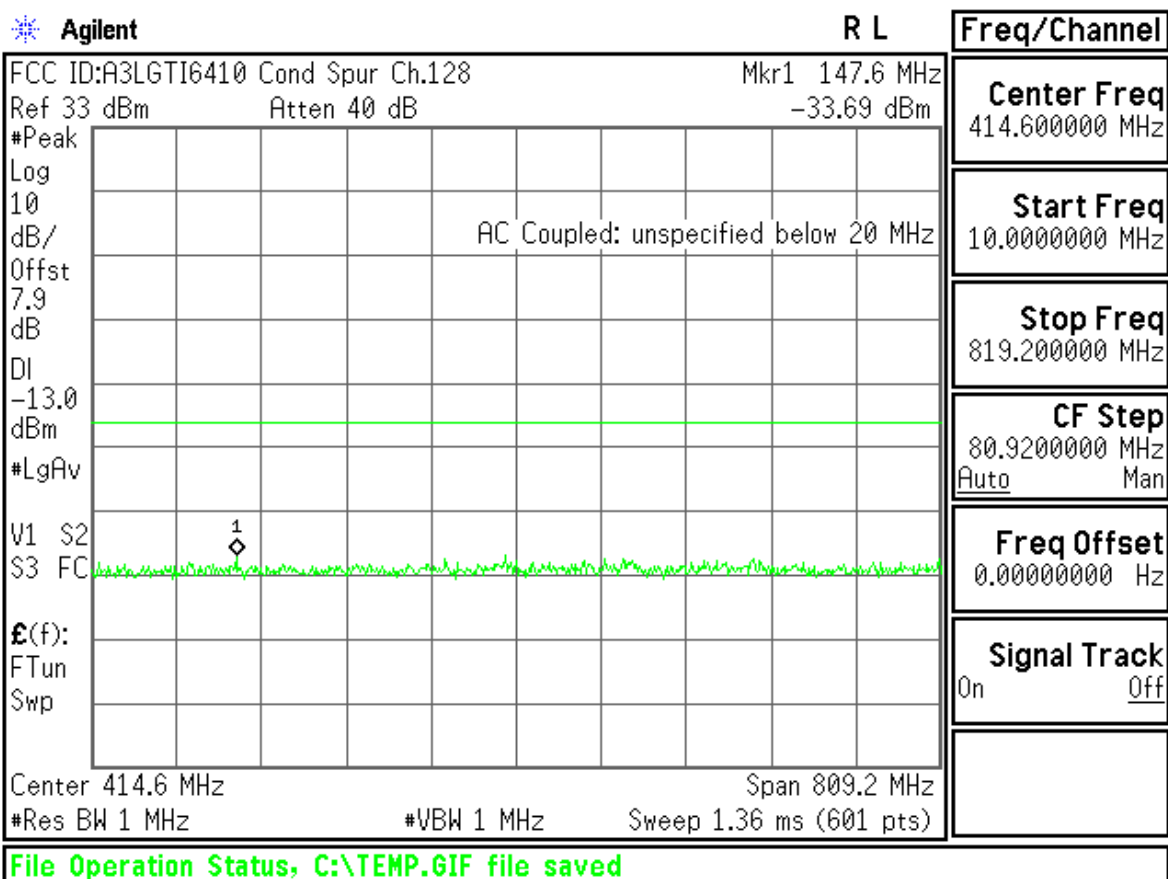
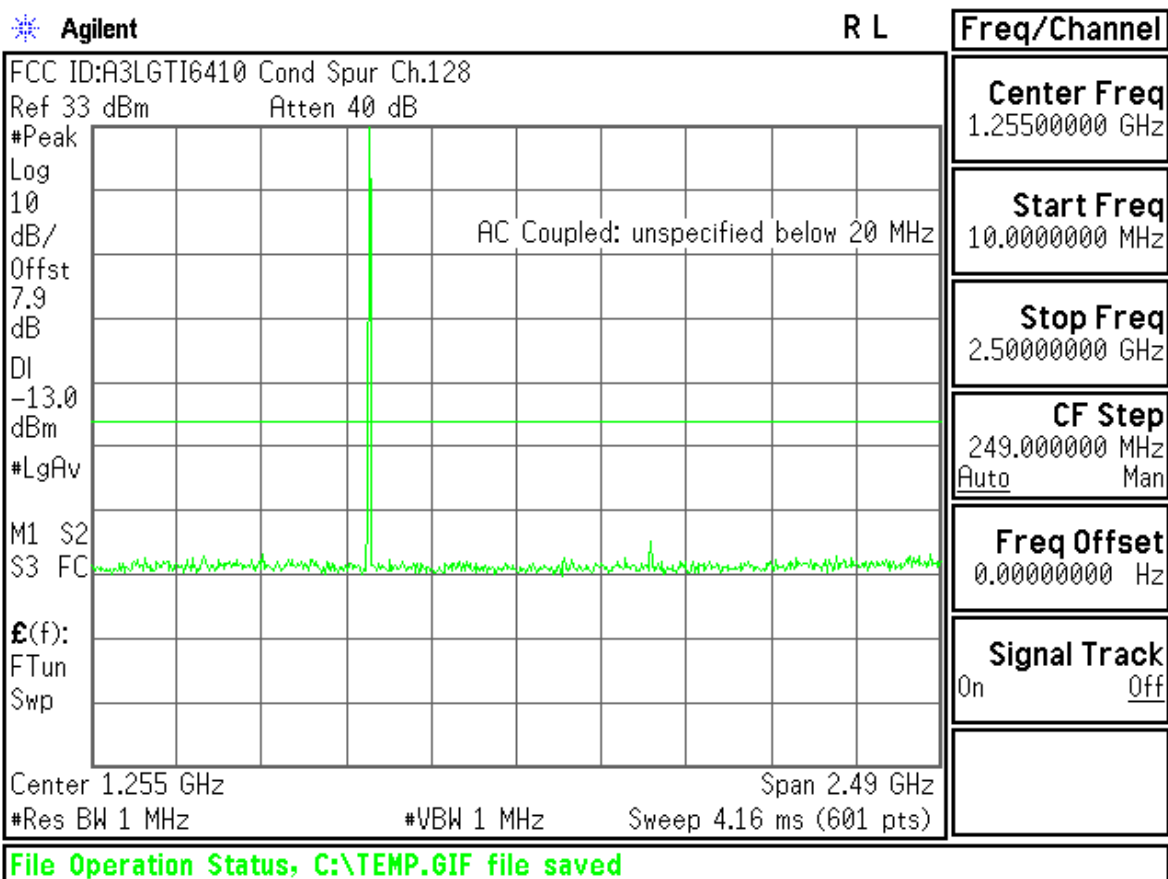


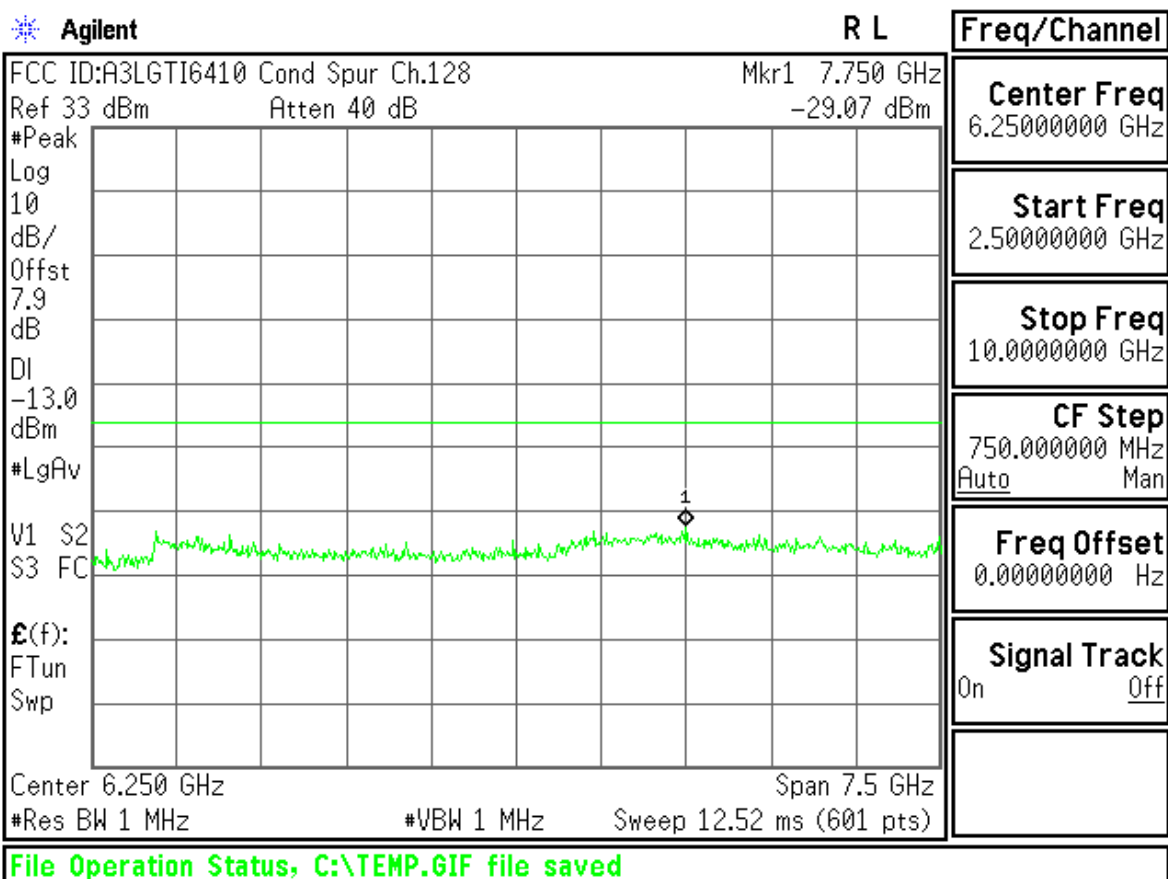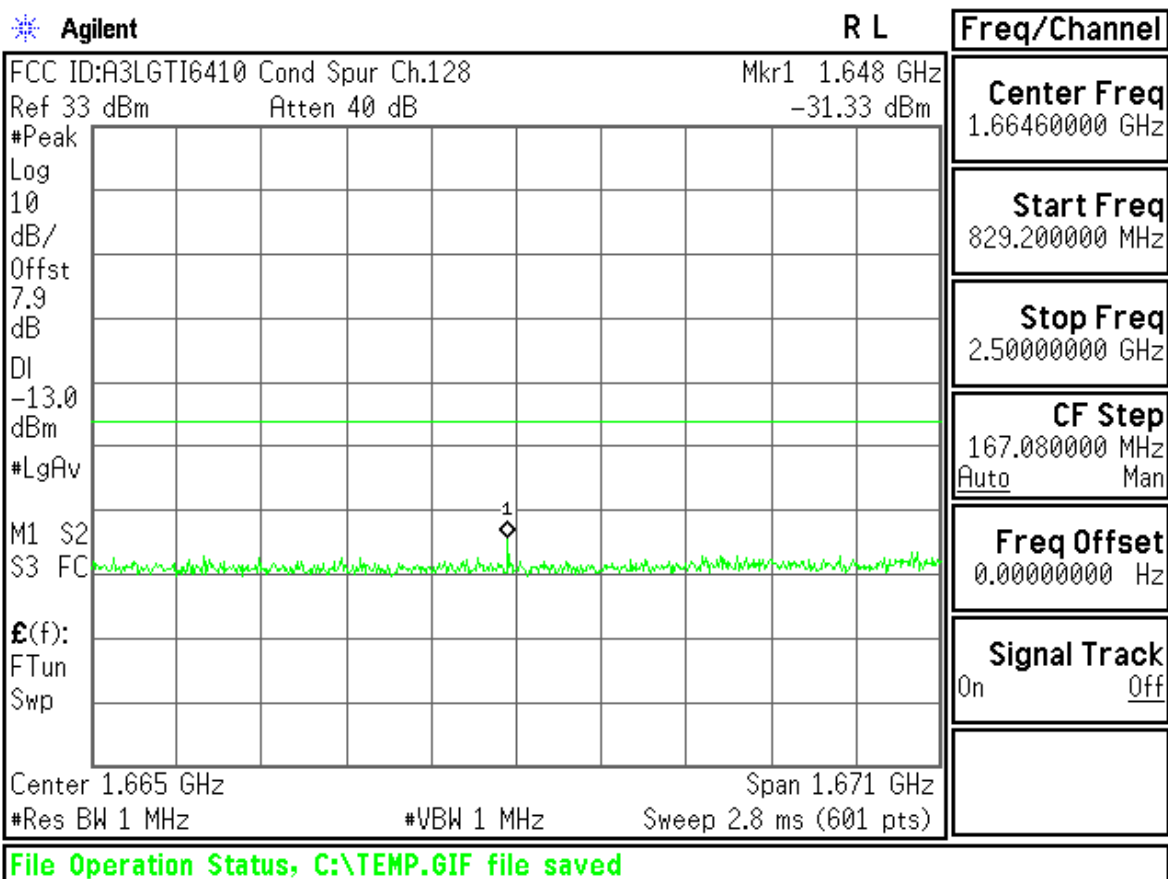

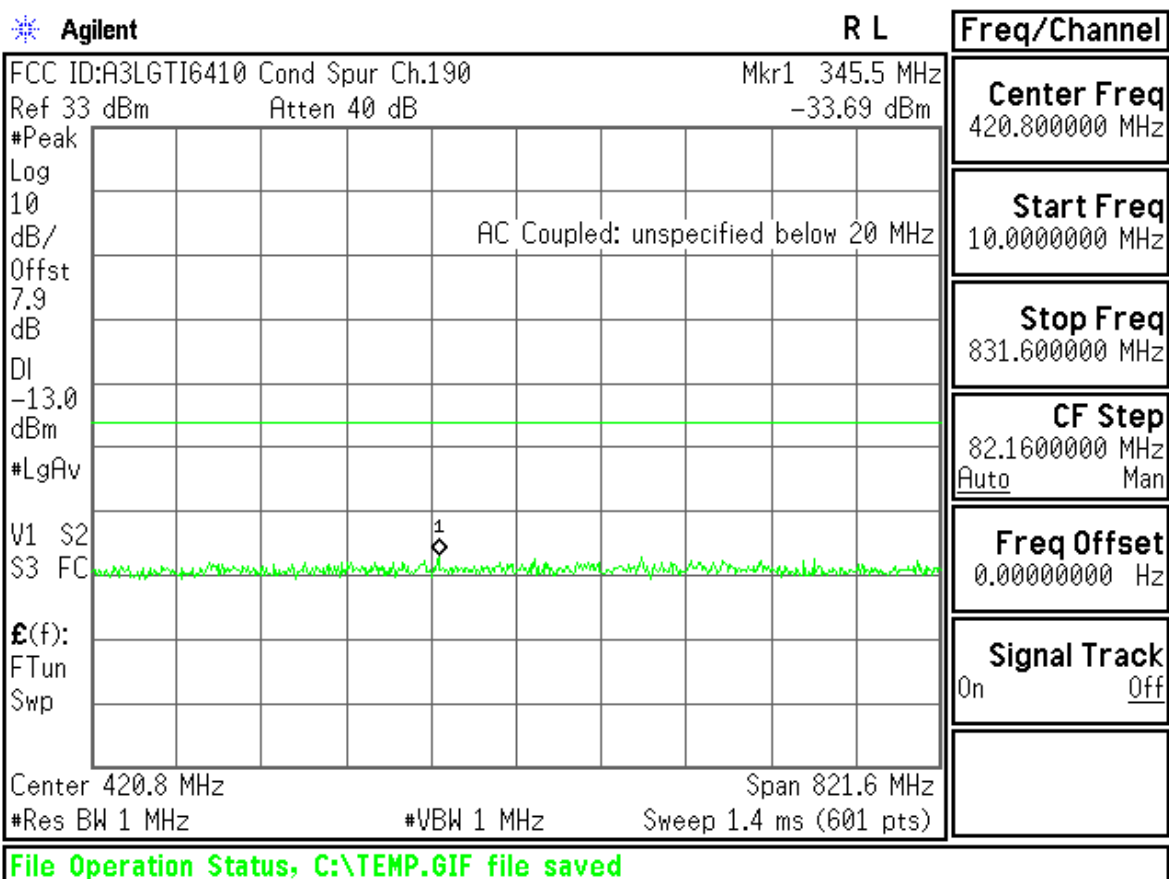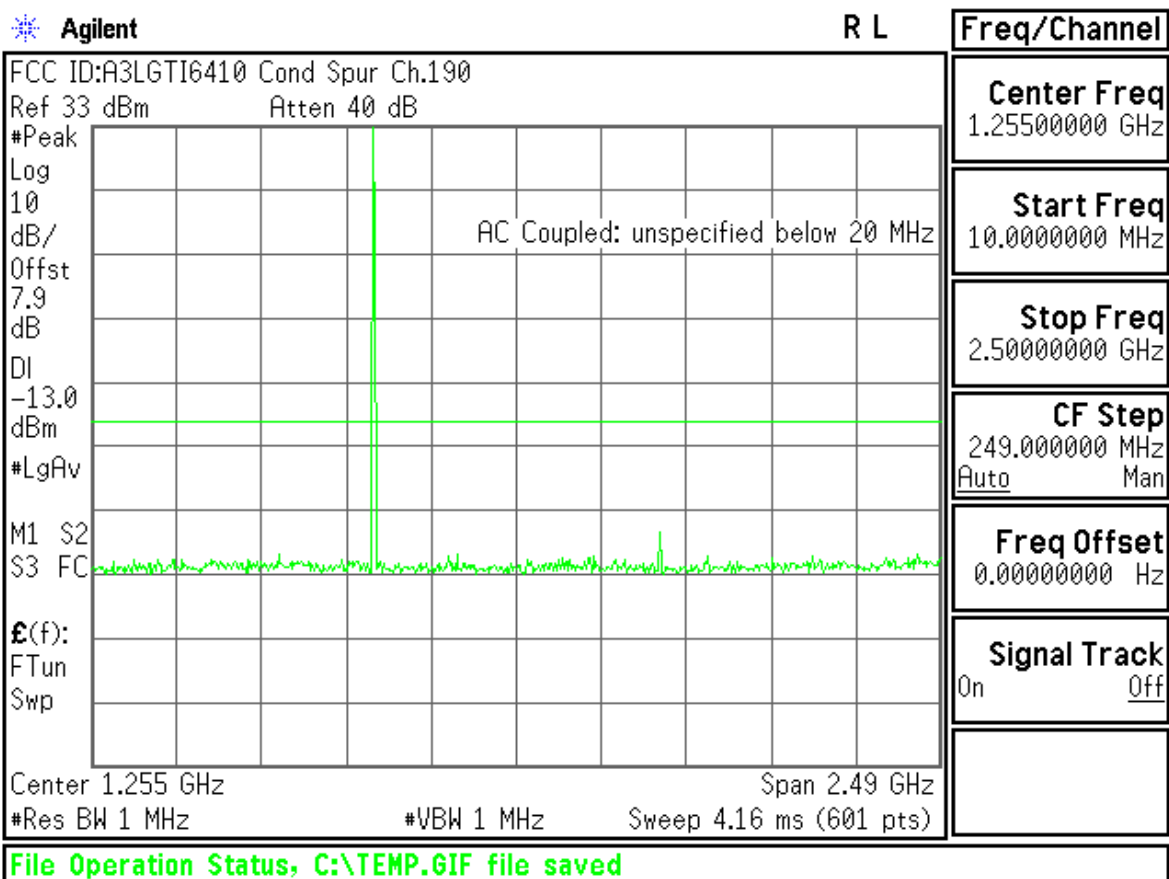

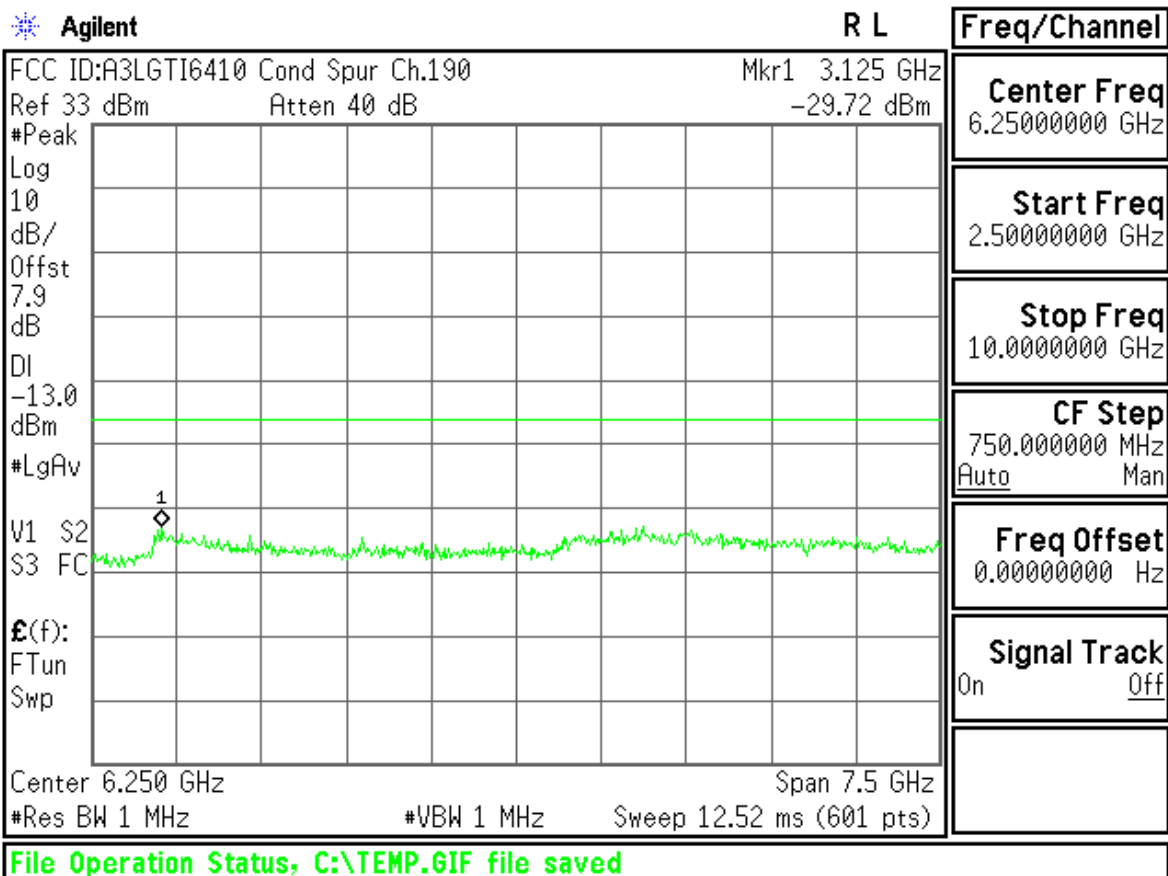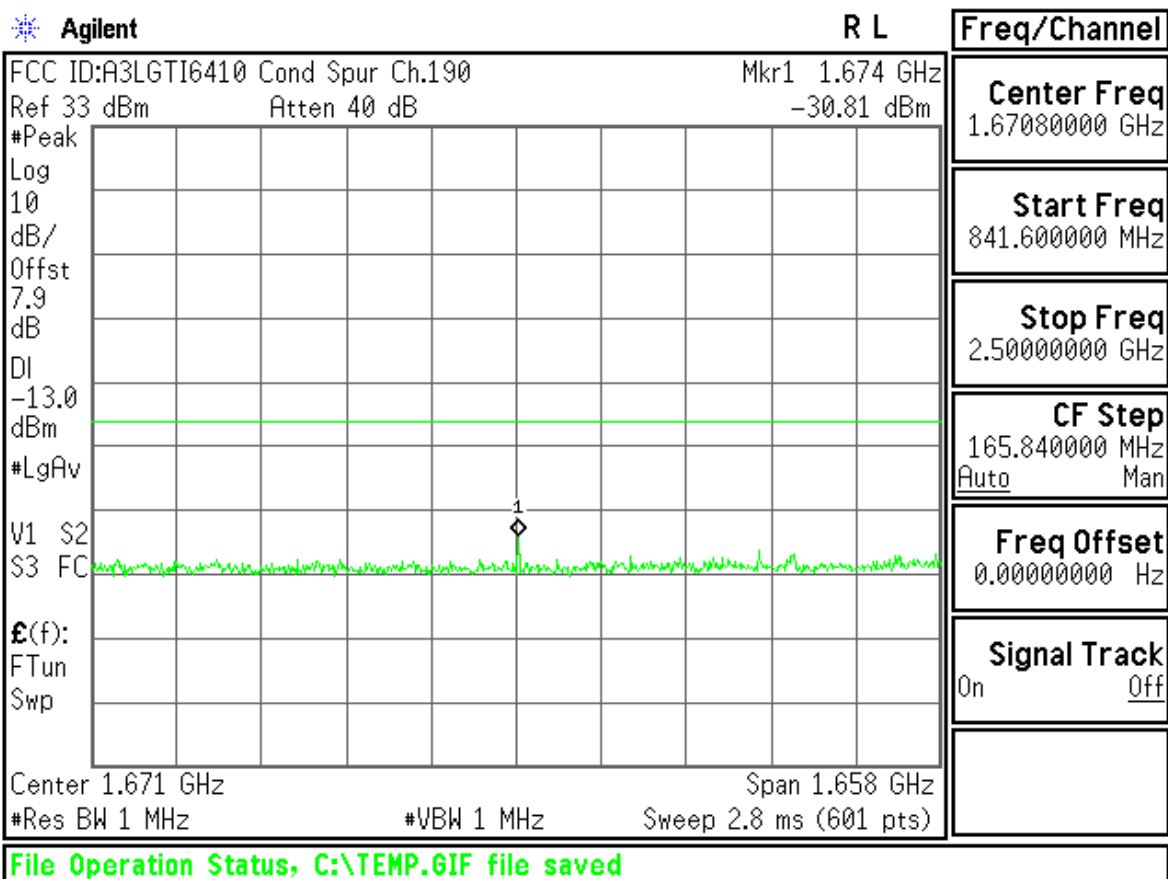

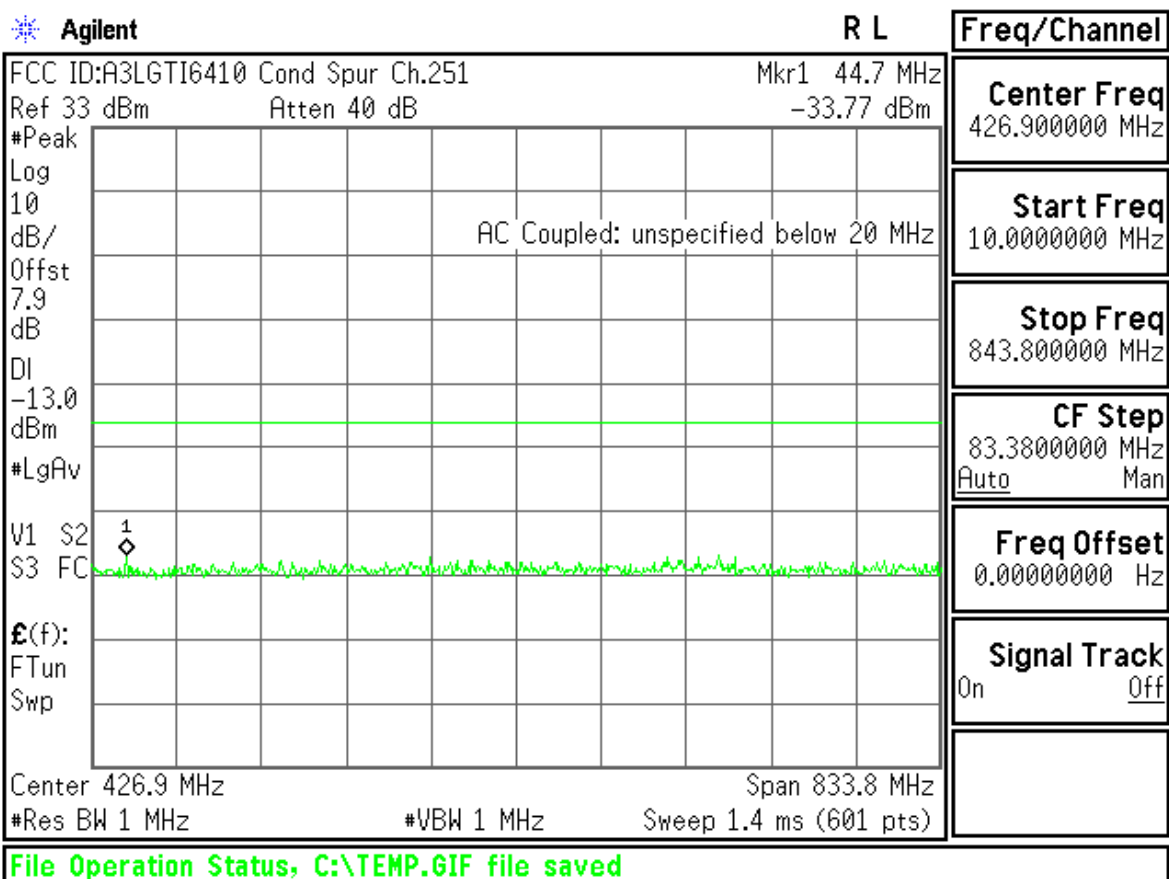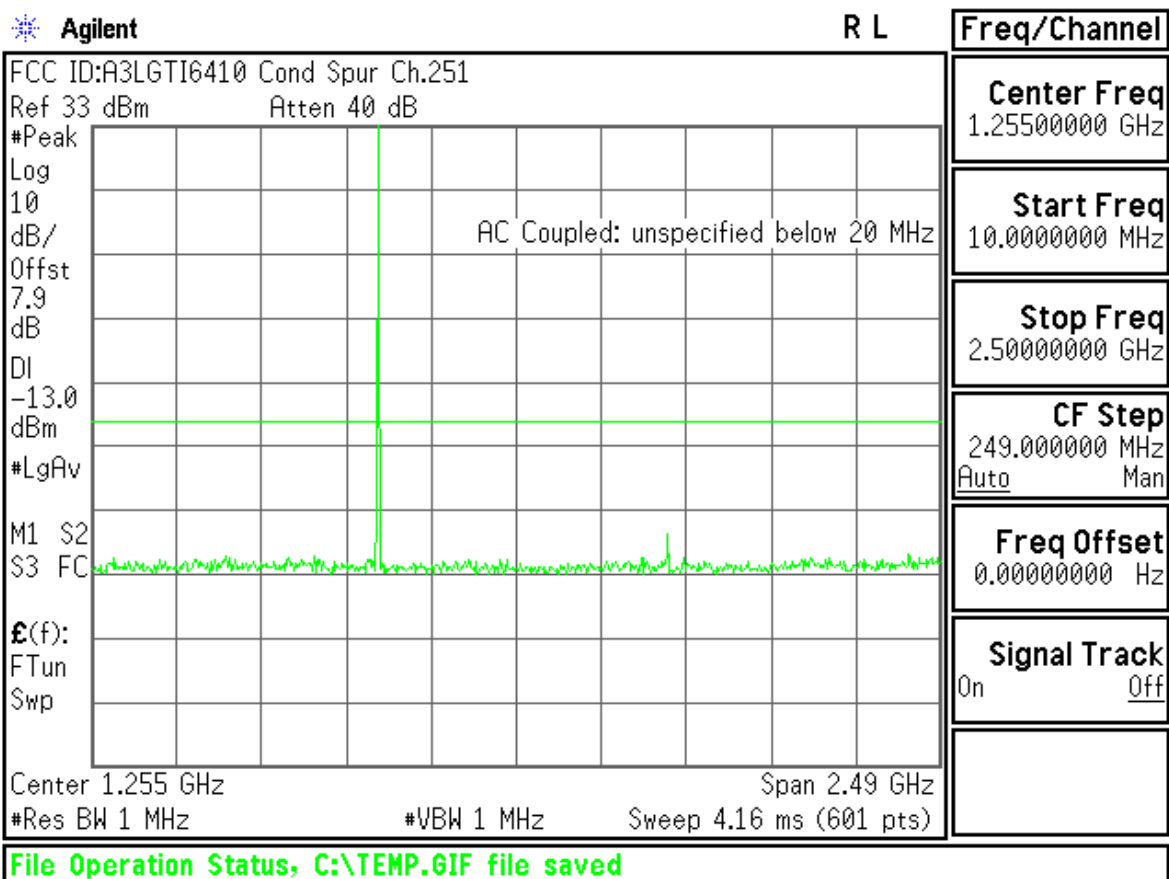

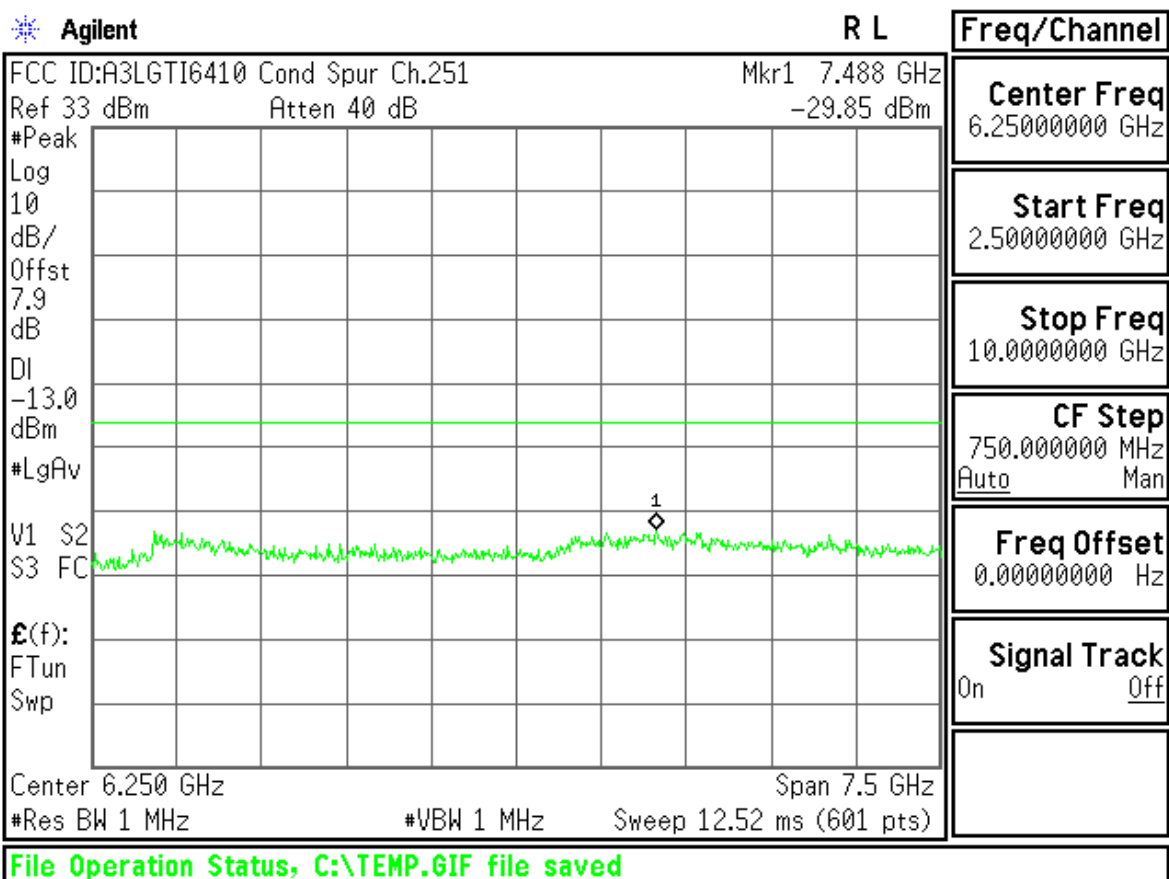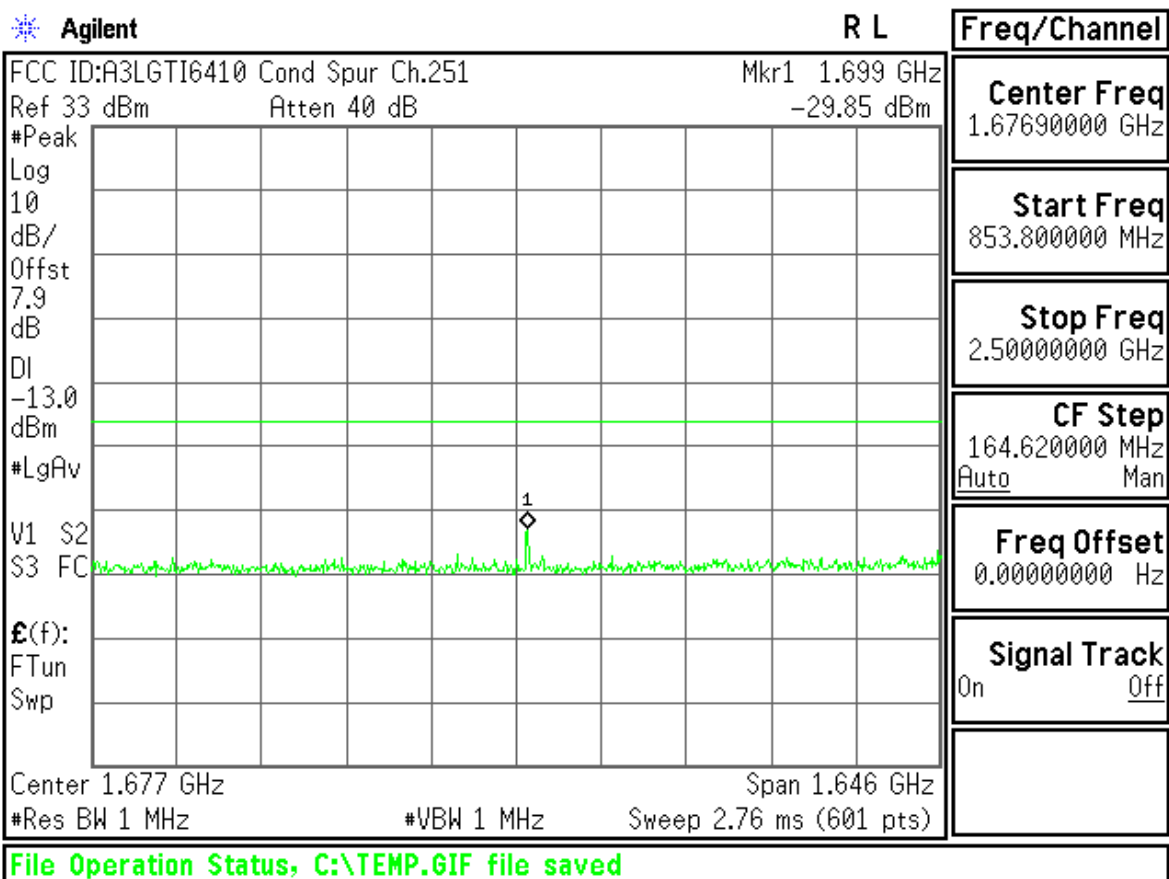

Agilent

R L

Freq/Channel

FCC ID:A3LGTI6410 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.9

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

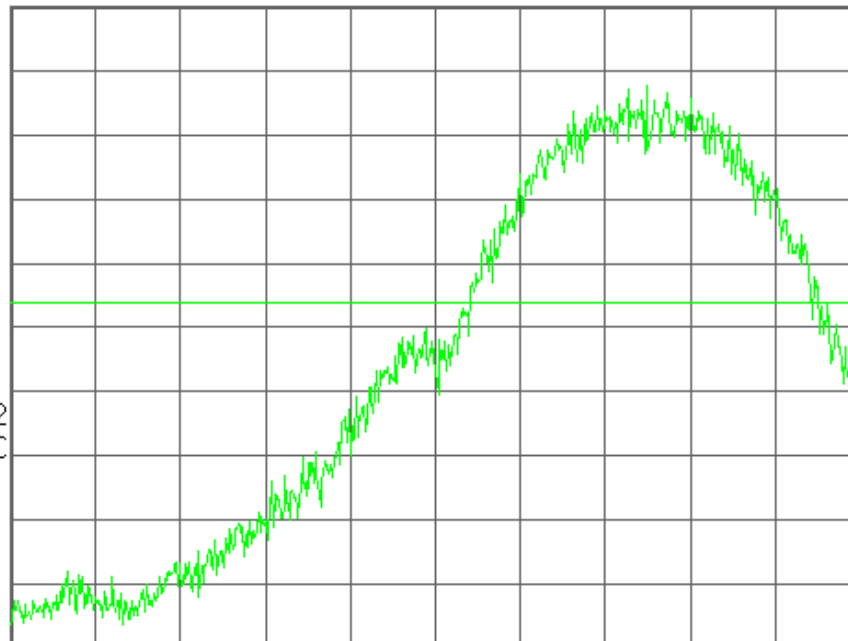

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI6410 Band Edge Ch.128

Mkr1 823.974 6 MHz

Ref 33 dBm

Atten 40 dB

-18.14 dBm

#Avg

Log

10

dB/

Offst

7.9

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

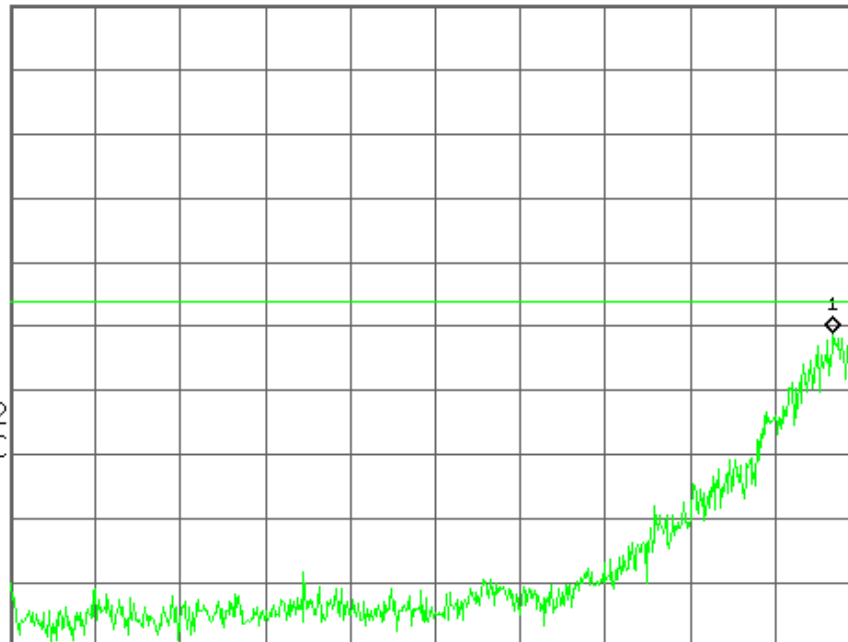

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz



Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

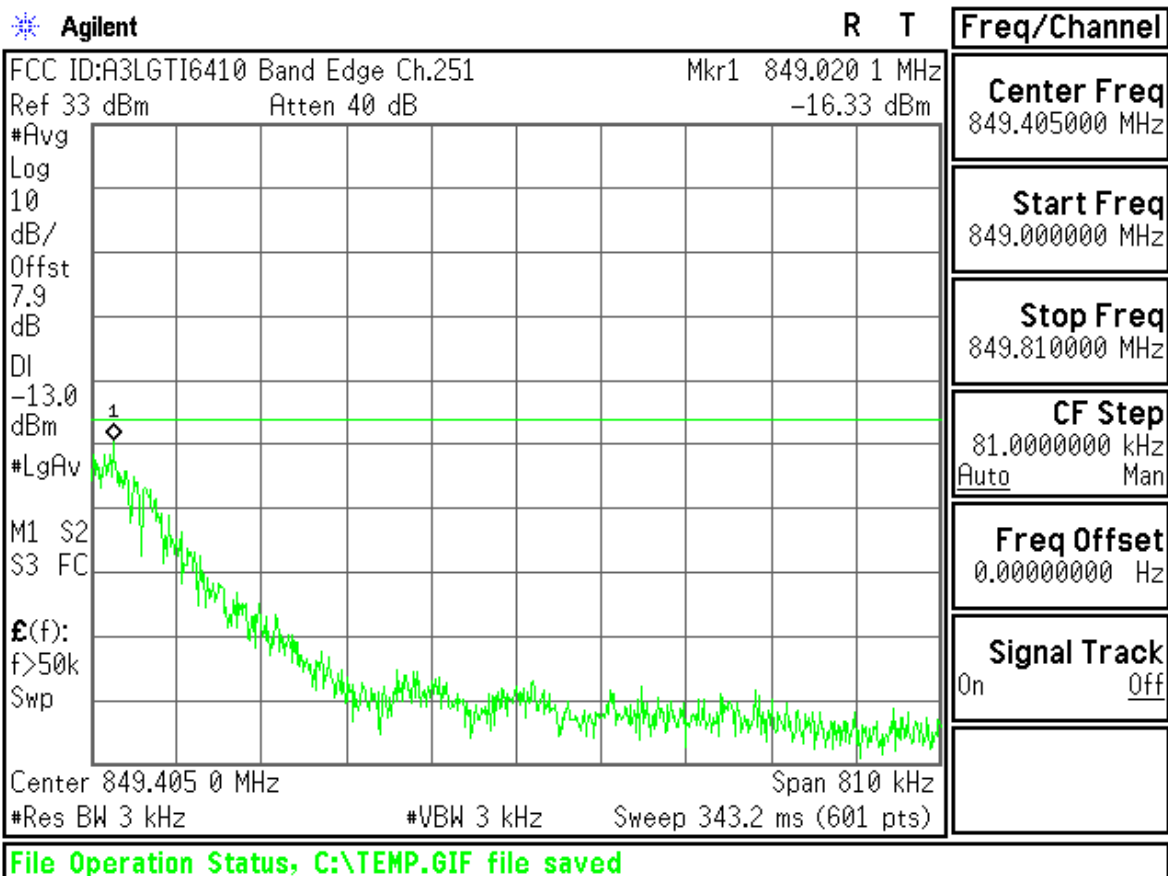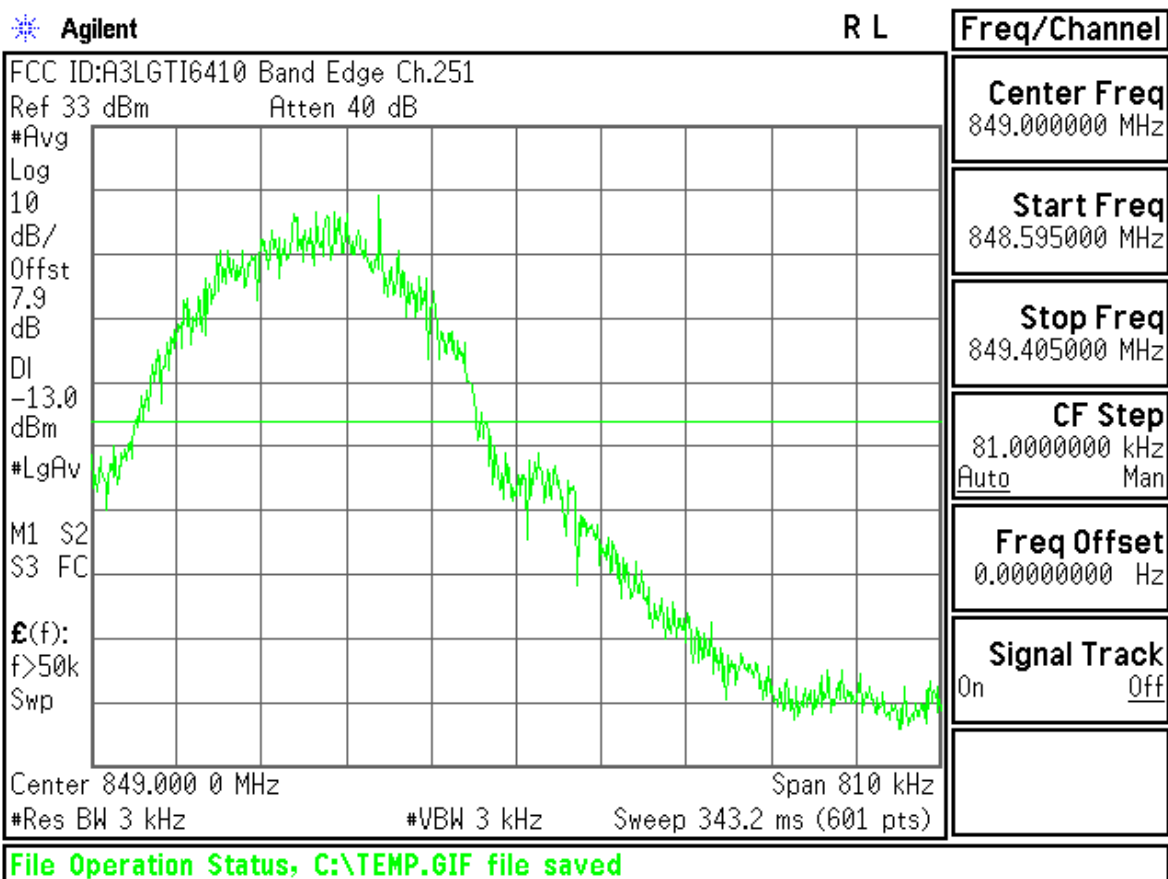

GSM1900

Agilent


R T

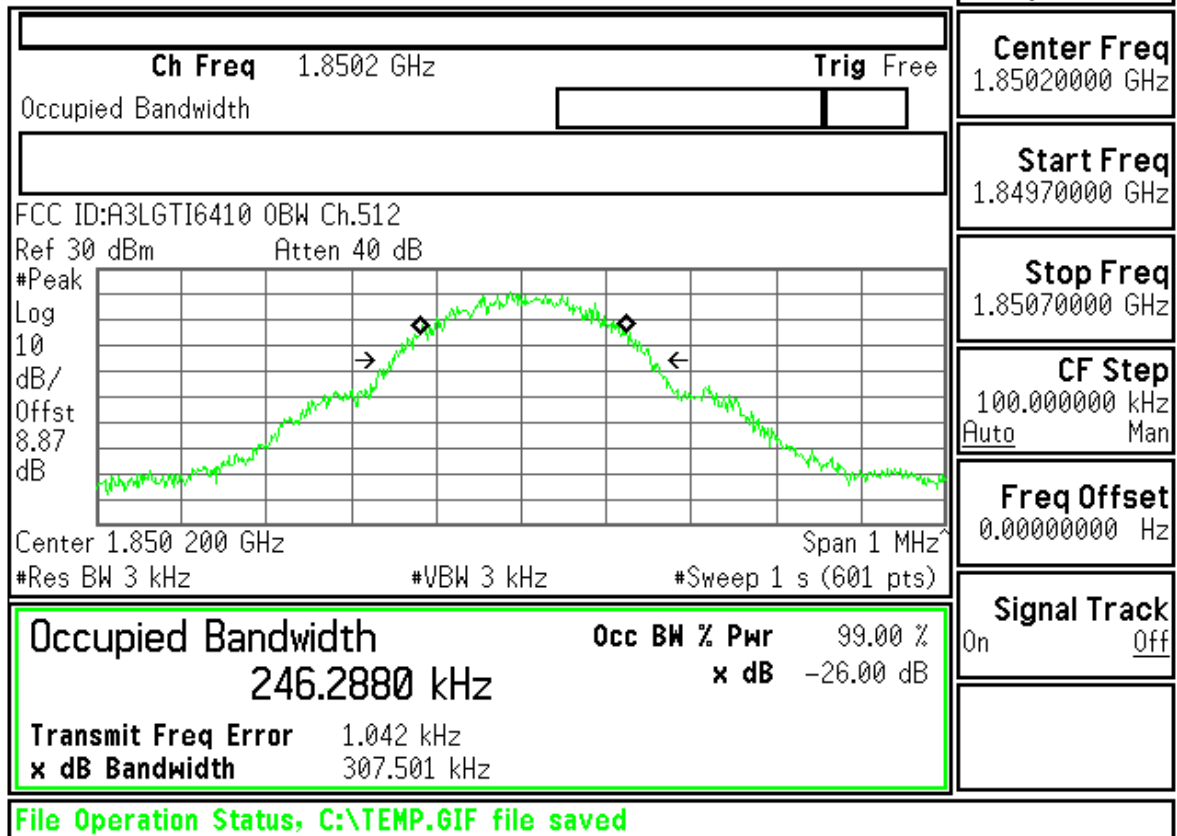


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

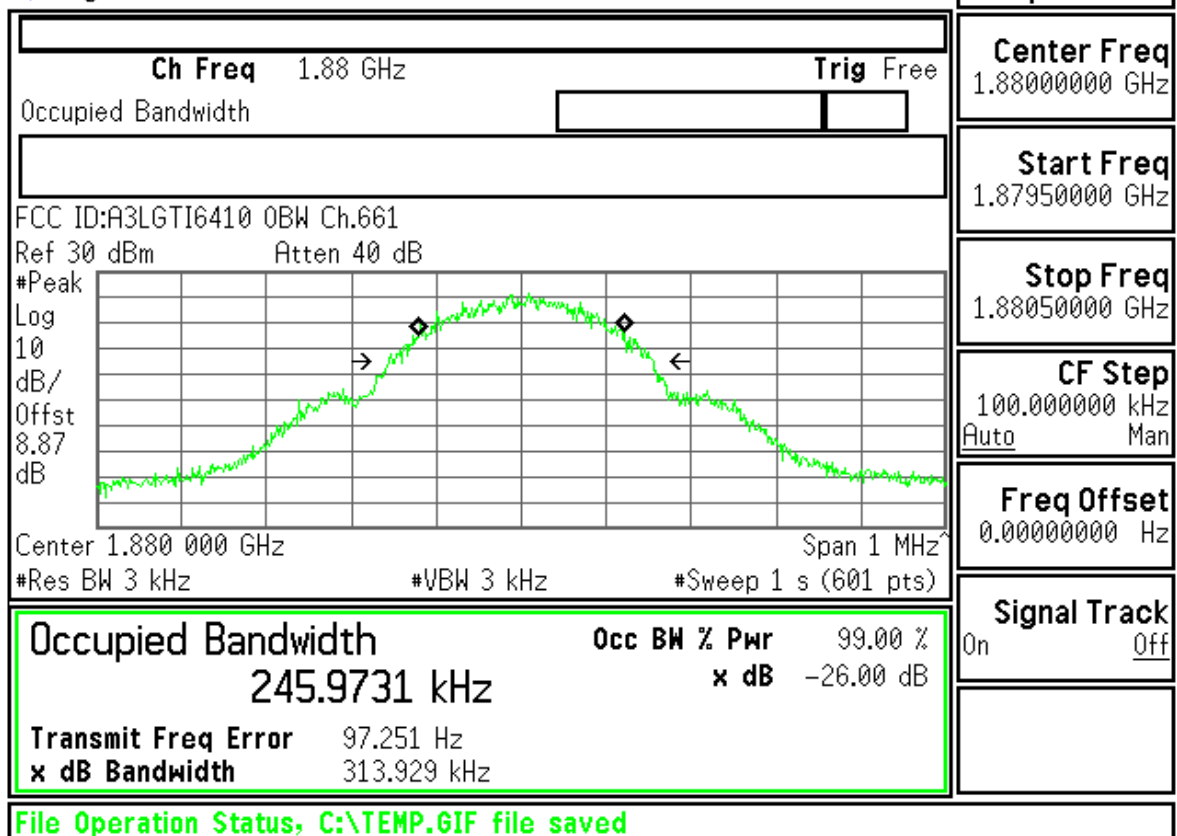

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

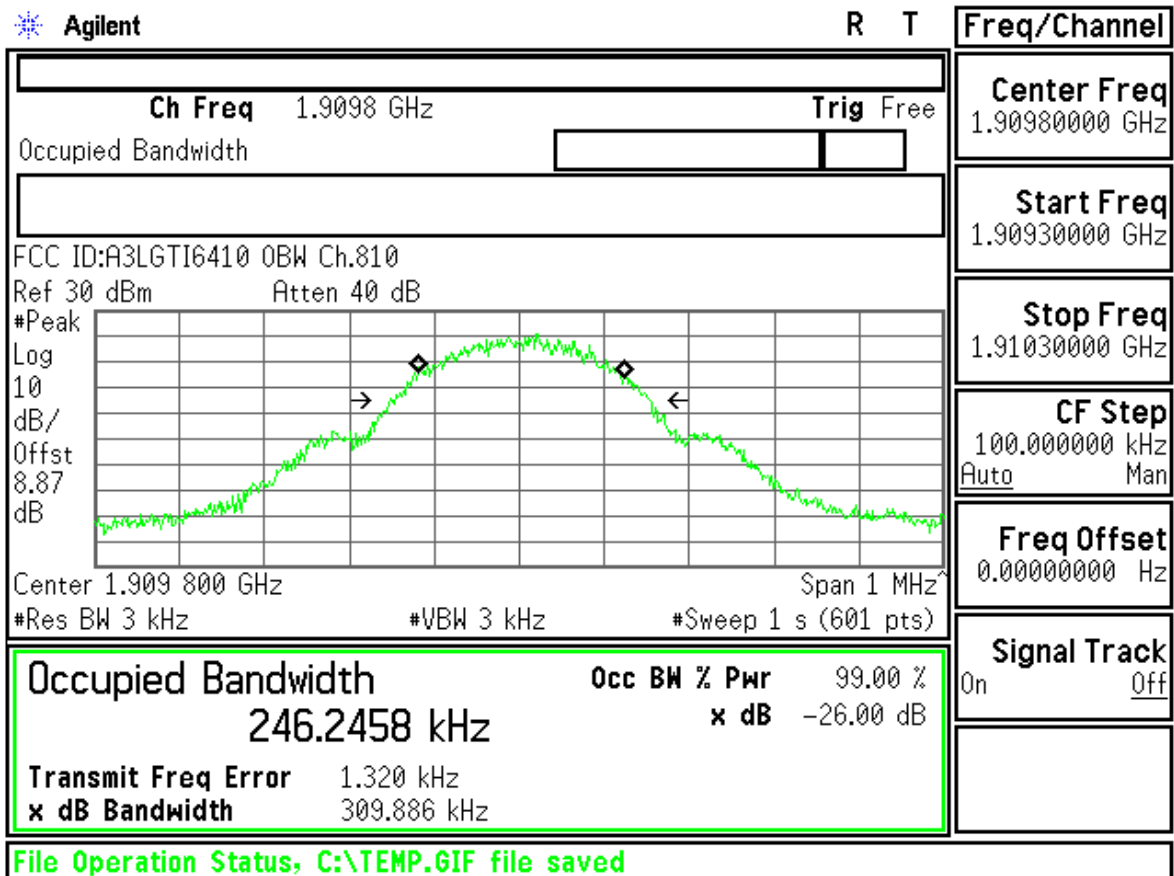

FCC ID : A3LGTI6410 Transmit Power 512CH

Measurement/Instrument Screen																																								
Control		Transmit Power								TCH Parms																														
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.48</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.48</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.48	----	----	----	Estimated Carrier Power	29.48	----	----	----	Downlink Traffic Power ▾															
	Burst 1									Burst 2	Burst 3	Burst 4																												
Burst Power	29.48									----	----	----																												
Estimated Carrier Power	29.48									----	----	----																												
Traffic Band																																								
Snap Window Positions		Single <table><tr><th colspan="4">Phase & Frequency Error</th></tr><tr><th>Peak Phase °</th><th>RMS Phase °</th><th colspan="2">Frequency Hz</th></tr><tr><td>Minimum</td><td>2.05</td><td>0.77</td><td colspan="2">-24.20</td></tr><tr><td>Maximum</td><td>4.34</td><td>1.32</td><td colspan="2">-5.40</td></tr><tr><td>Average</td><td>3.01</td><td>1.04</td><td colspan="2">-17.11</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td colspan="2">Pass</td></tr></table> 50 / 50 Single								Phase & Frequency Error				Peak Phase °	RMS Phase °	Frequency Hz		Minimum	2.05	0.77	-24.20		Maximum	4.34	1.32	-5.40		Average	3.01	1.04	-17.11		Pass/Fail	Pass	Pass	Pass		PCS		
										Phase & Frequency Error																														
										Peak Phase °	RMS Phase °	Frequency Hz																												
										Minimum	2.05	0.77	-24.20																											
Maximum	4.34	1.32	-5.40																																					
Average	3.01	1.04	-17.11																																					
Pass/Fail	Pass	Pass	Pass																																					
Traffic Channel																																								
512																																								
1 of 2		<table><tr><td colspan="2"></td><td colspan="3">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="3"></td><td colspan="3"></td></tr><tr><td></td><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>										Active Cell Connected			Sys Type: GSM													IntRef	Offset	R	T				MS TX Level					
												Active Cell Connected			Sys Type: GSM																									
												IntRef	Offset	R	T																									
0																																								
										Channel Mode Setup ▾																														
										Return																														
										1 of 2																														


FCC ID : A3LGTI6410 Transmit Power 661CH

Measurement/Instrument Screen																															
Control		Transmit Power						TCH Parms																							
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.79</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.79</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.79	----	----	----	Estimated Carrier Power	29.79	----	----	----	Downlink Traffic Power ▾								
									Burst 1	Burst 2	Burst 3	Burst 4																			
								Burst Power	29.79	----	----	----																			
		Estimated Carrier Power	29.79	----	----	----																									
		Traffic Band																													
PCS																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.31</td> <td>0.88</td> <td>-20.94</td> </tr> <tr> <td>Maximum</td> <td>4.39</td> <td>1.38</td> <td>-1.93</td> </tr> <tr> <td>Average</td> <td>3.16</td> <td>1.10</td> <td>-13.19</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.31	0.88	-20.94	Maximum	4.39	1.38	-1.93	Average	3.16	1.10	-13.19	Pass/Fail	Pass	Pass	Pass	Traffic Channel			
									Peak Phase °	RMS Phase °	Frequency Hz																				
								Minimum	2.31	0.88	-20.94																				
		Maximum	4.39	1.38	-1.93																										
		Average	3.16	1.10	-13.19																										
Pass/Fail	Pass	Pass	Pass																												
661																															
MS TX Level																															
0																															
1 of 2		<table border="1"> <thead> <tr> <th colspan="3">Active Cell Connected</th> <th colspan="3">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td>IntRef</td> <td>Offset</td> <td>R T</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>						Active Cell Connected			Sys Type: GSM			IntRef	Offset	R T				Channel Mode Setup ▾											
								Active Cell Connected			Sys Type: GSM																				
								IntRef	Offset	R T																					
		Return																													
		1 of 2																													


FCC ID : A3LGTI6410 Transmit Power 810CH

Measurement/Instrument Screen																															
Control		Transmit Power						TCH Parms																							
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.52</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.52</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.52	----	----	----	Estimated Carrier Power	29.52	----	----	----	Downlink Traffic Power ▾								
									Burst 1	Burst 2	Burst 3	Burst 4																			
								Burst Power	29.52	----	----	----																			
		Estimated Carrier Power	29.52	----	----	----																									
		Traffic Band																													
PCS																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.42</td> <td>0.98</td> <td>-21.82</td> </tr> <tr> <td>Maximum</td> <td>4.85</td> <td>1.46</td> <td>-1.18</td> </tr> <tr> <td>Average</td> <td>3.48</td> <td>1.23</td> <td>-13.30</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.42	0.98	-21.82	Maximum	4.85	1.46	-1.18	Average	3.48	1.23	-13.30	Pass/Fail	Pass	Pass	Pass	Traffic Channel			
									Peak Phase °	RMS Phase °	Frequency Hz																				
								Minimum	2.42	0.98	-21.82																				
		Maximum	4.85	1.46	-1.18																										
		Average	3.48	1.23	-13.30																										
Pass/Fail	Pass	Pass	Pass																												
810																															
MS TX Level																															
0																															
1 of 2		<table border="1"> <thead> <tr> <th colspan="3">Active Cell Connected</th> <th colspan="3">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td>IntRef</td> <td>Offset</td> <td>R T</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>						Active Cell Connected			Sys Type: GSM			IntRef	Offset	R T				Channel Mode Setup ▾											
								Active Cell Connected			Sys Type: GSM																				
								IntRef	Offset	R T																					
		Return																													
		1 of 2																													


FCC ID : A3LGTI6410 GMSK Power vs Time 512CH

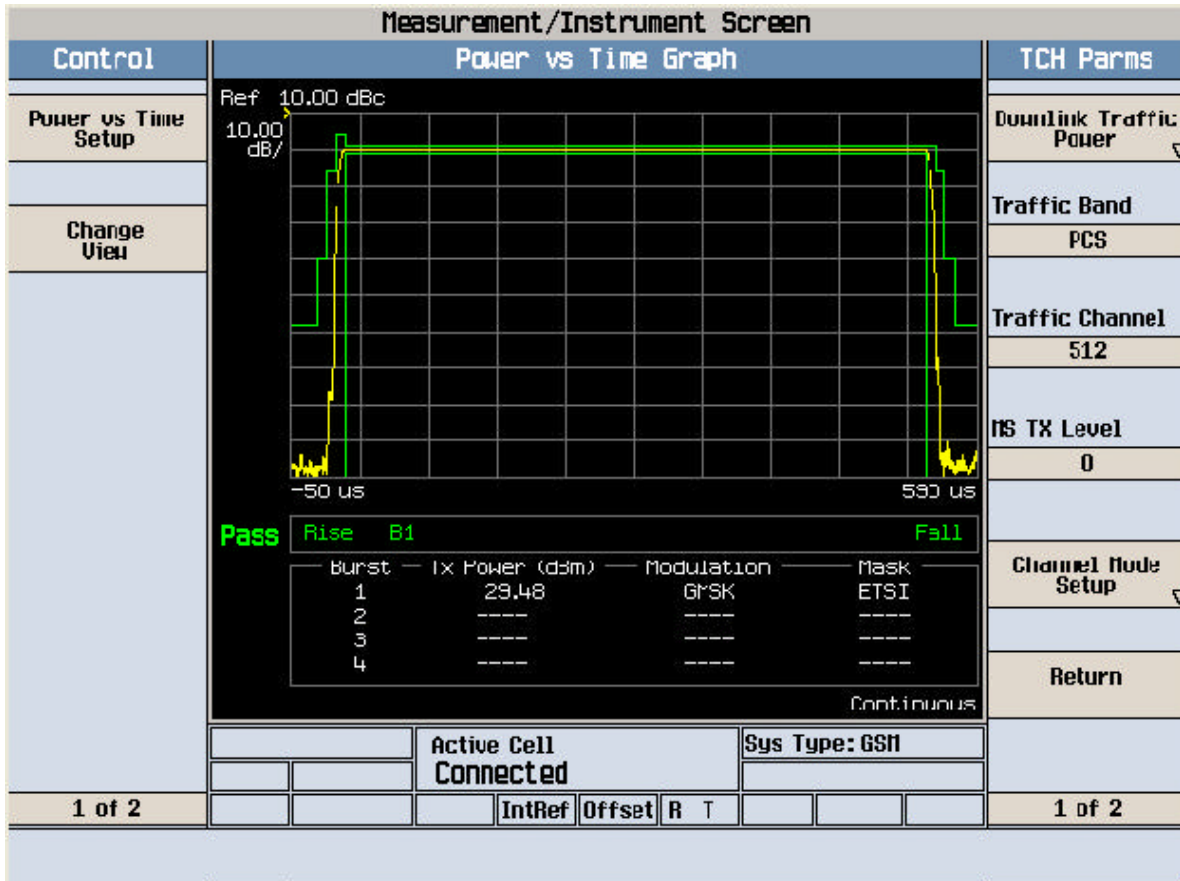


FCC ID : A3LGTI6410 GMSK Power vs Time 661CH

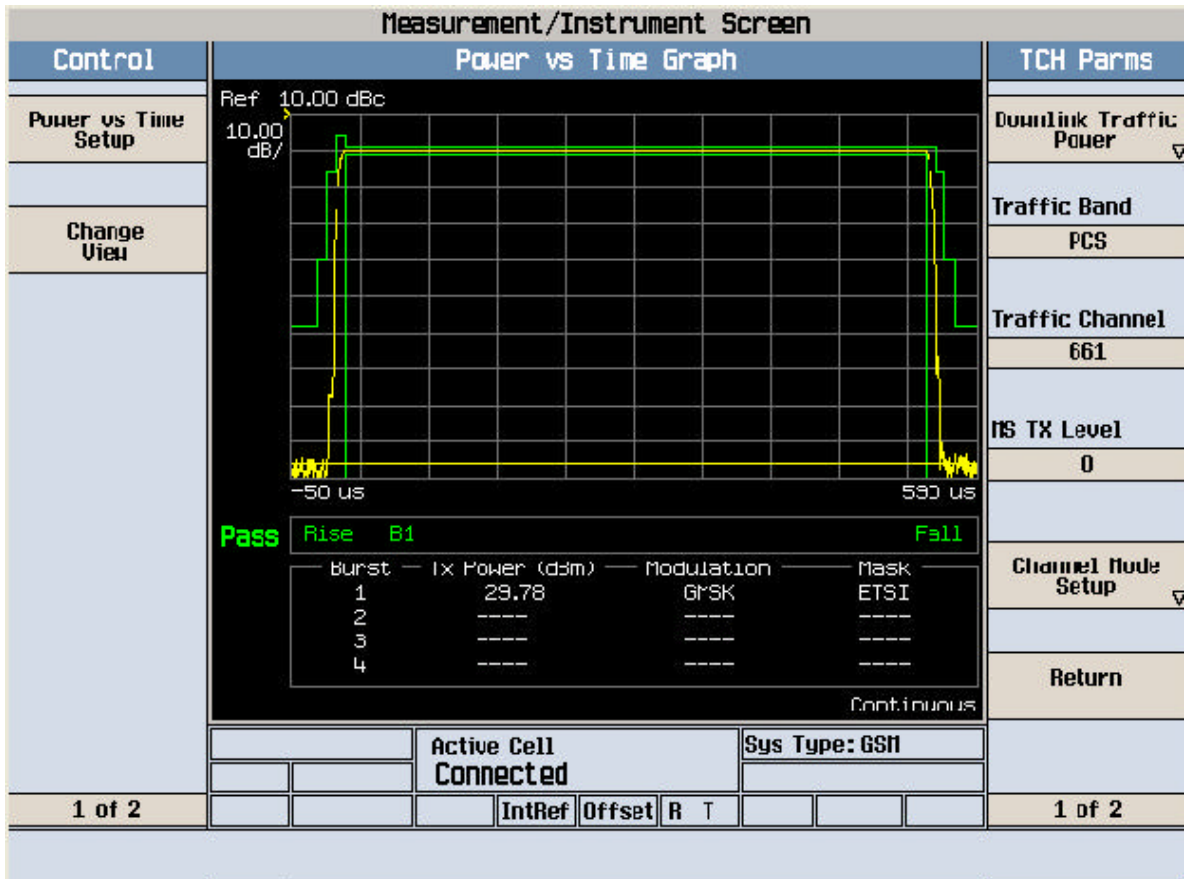


FCC ID : A3LGTI6410 GMSK Power vs Time 810CH

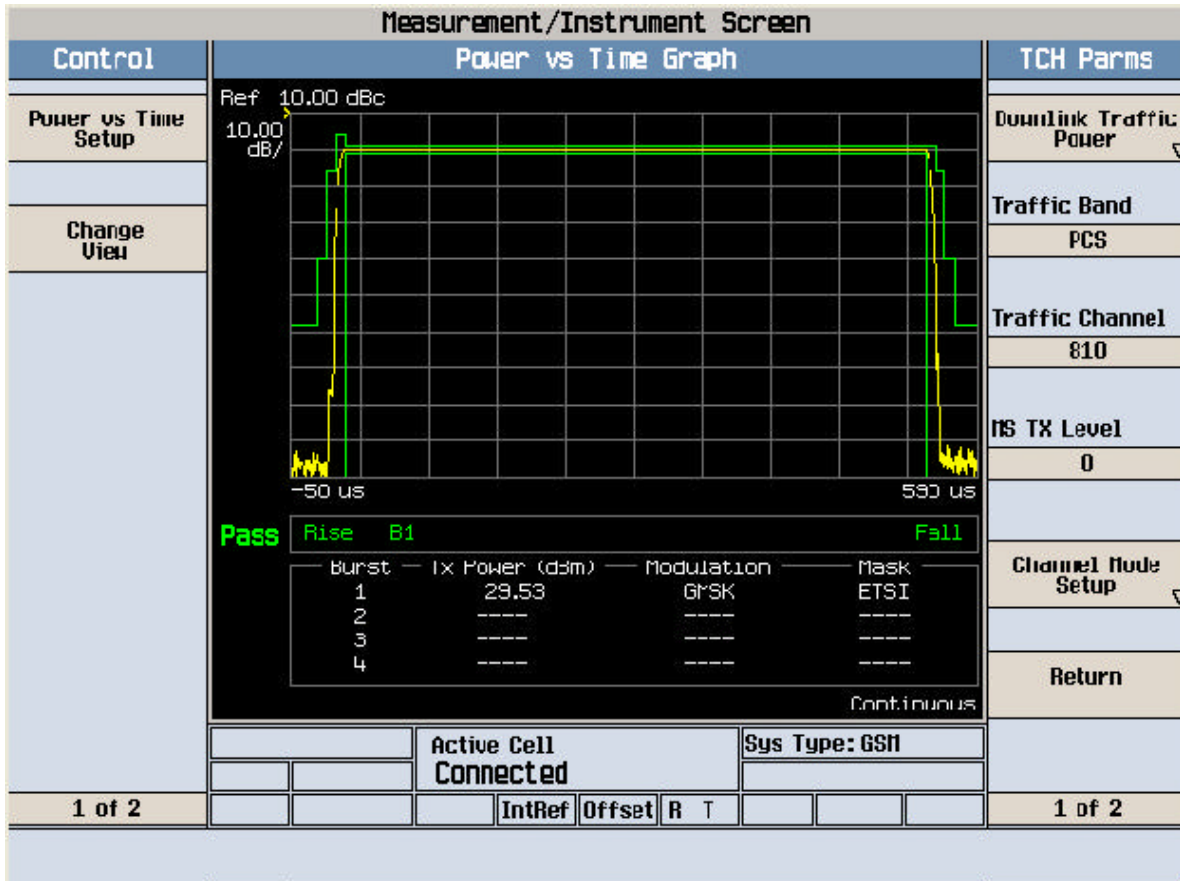


FCC ID : A3LGTI6410 Modulation & Switching 512CH


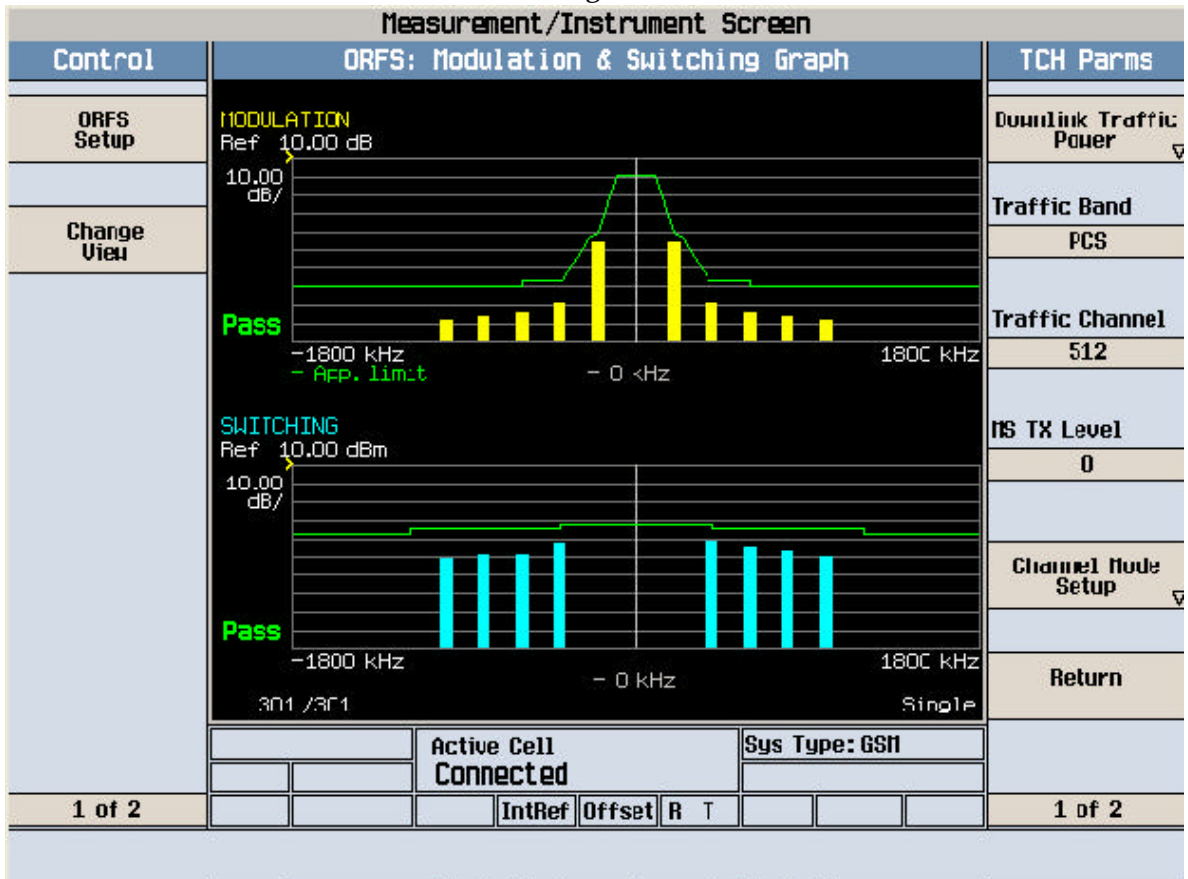




FCC ID : A3LGTI6410 Modulation & Switching 661CH

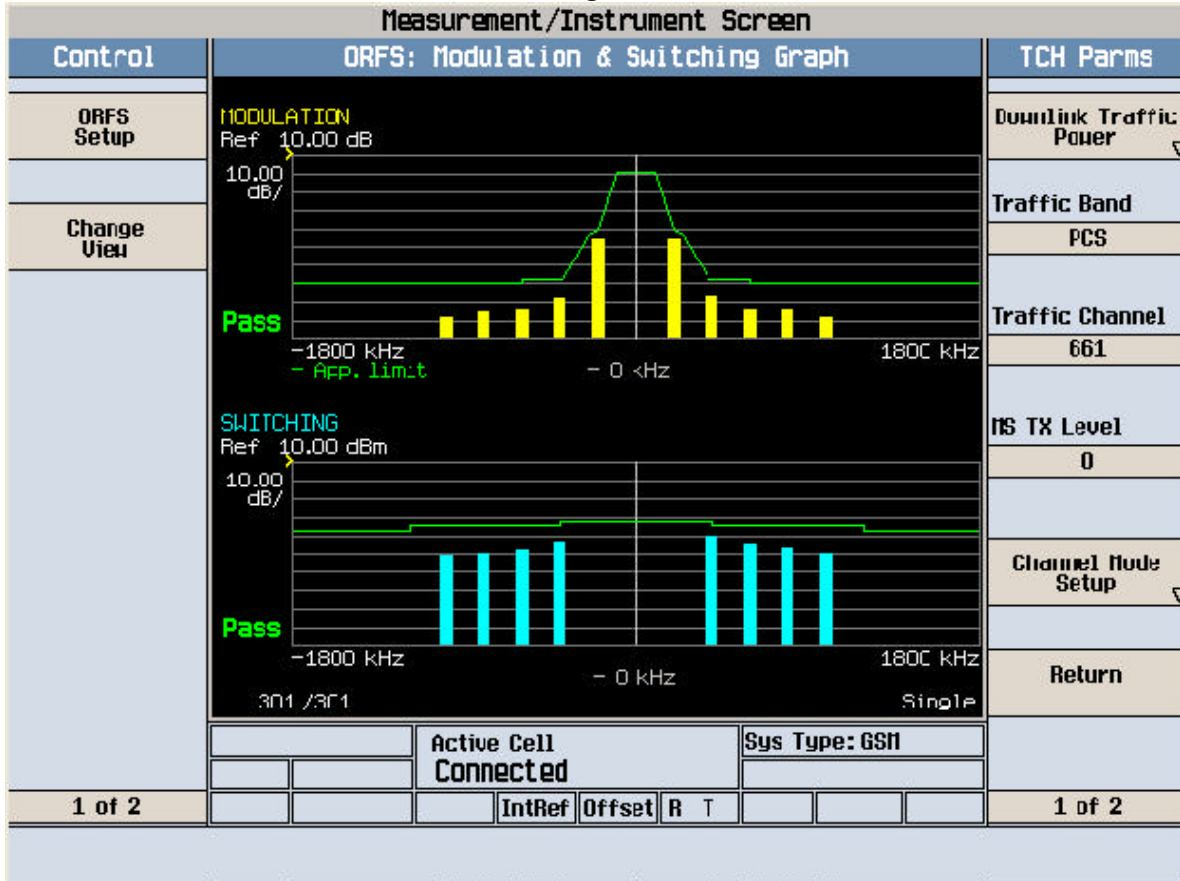

FCC ID : A3LGTI6410 Modulation & Switching 810CH

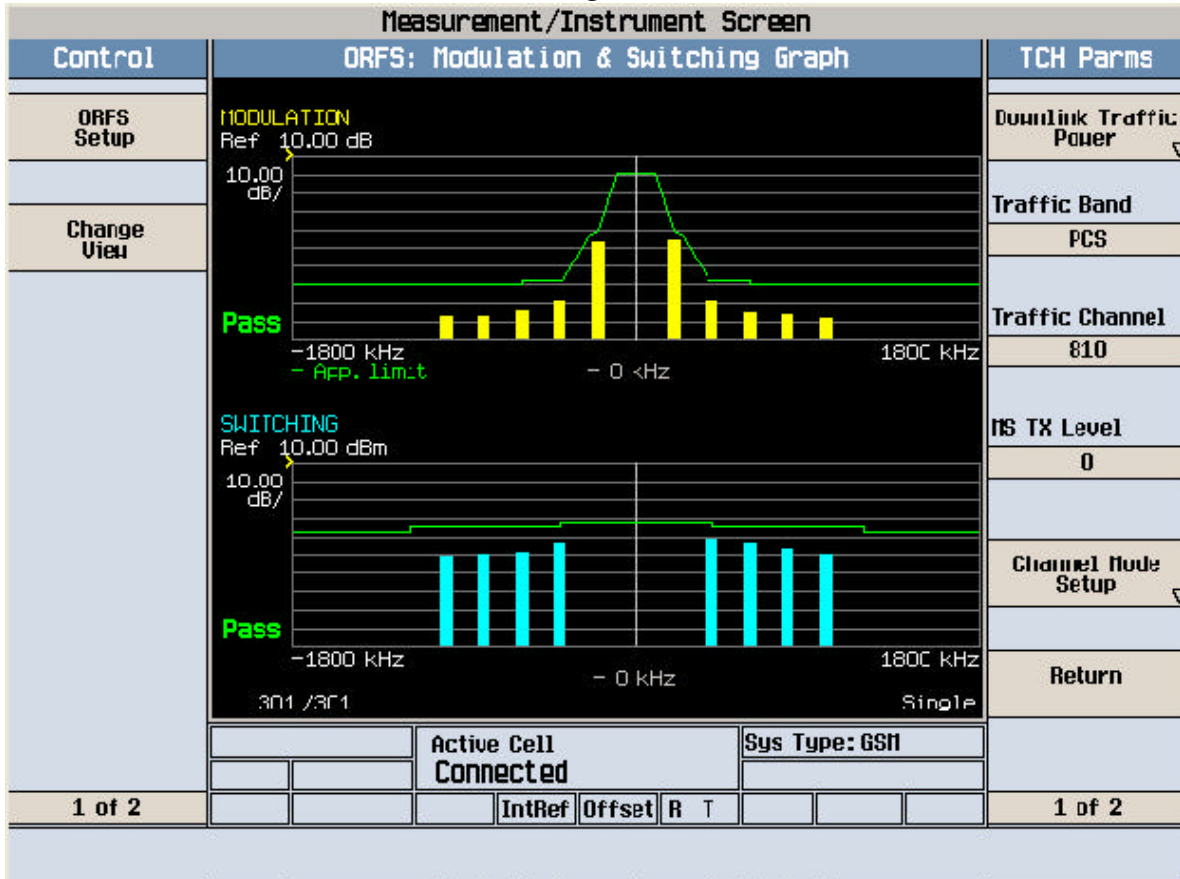

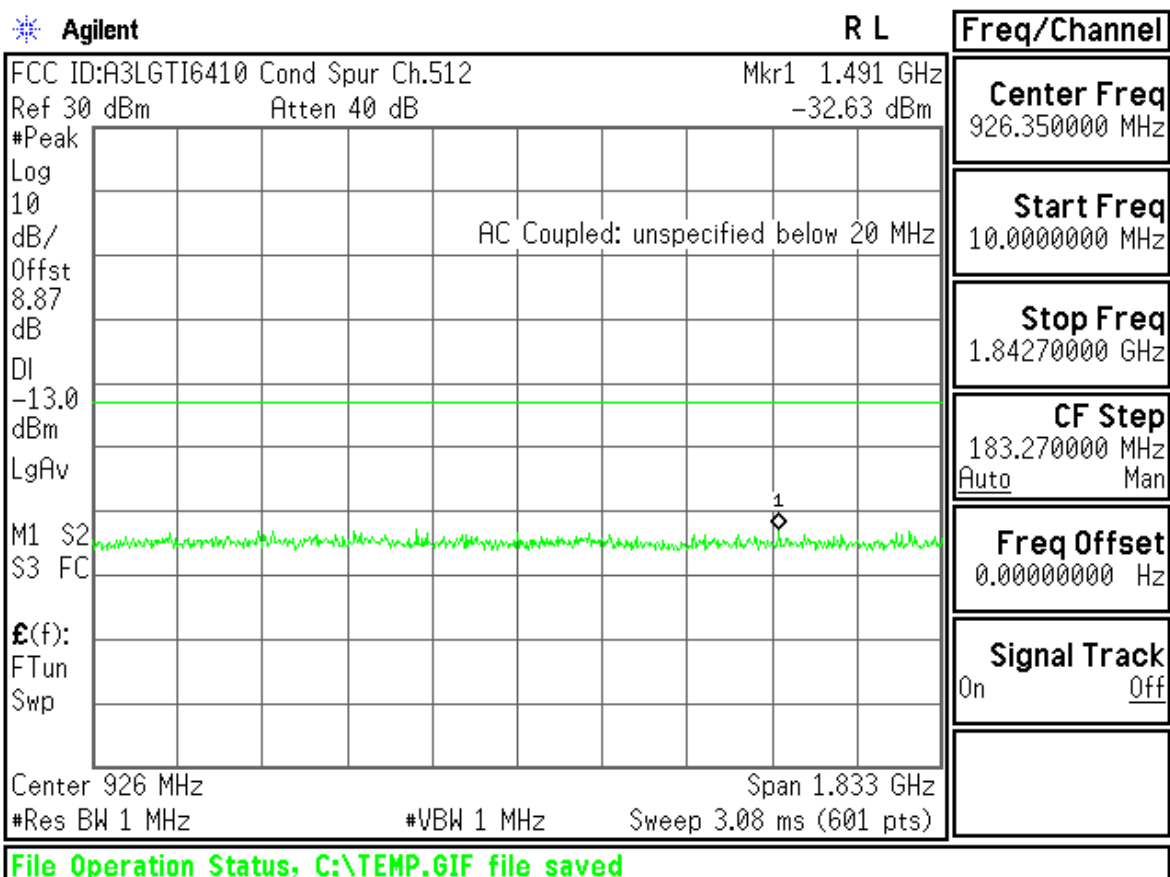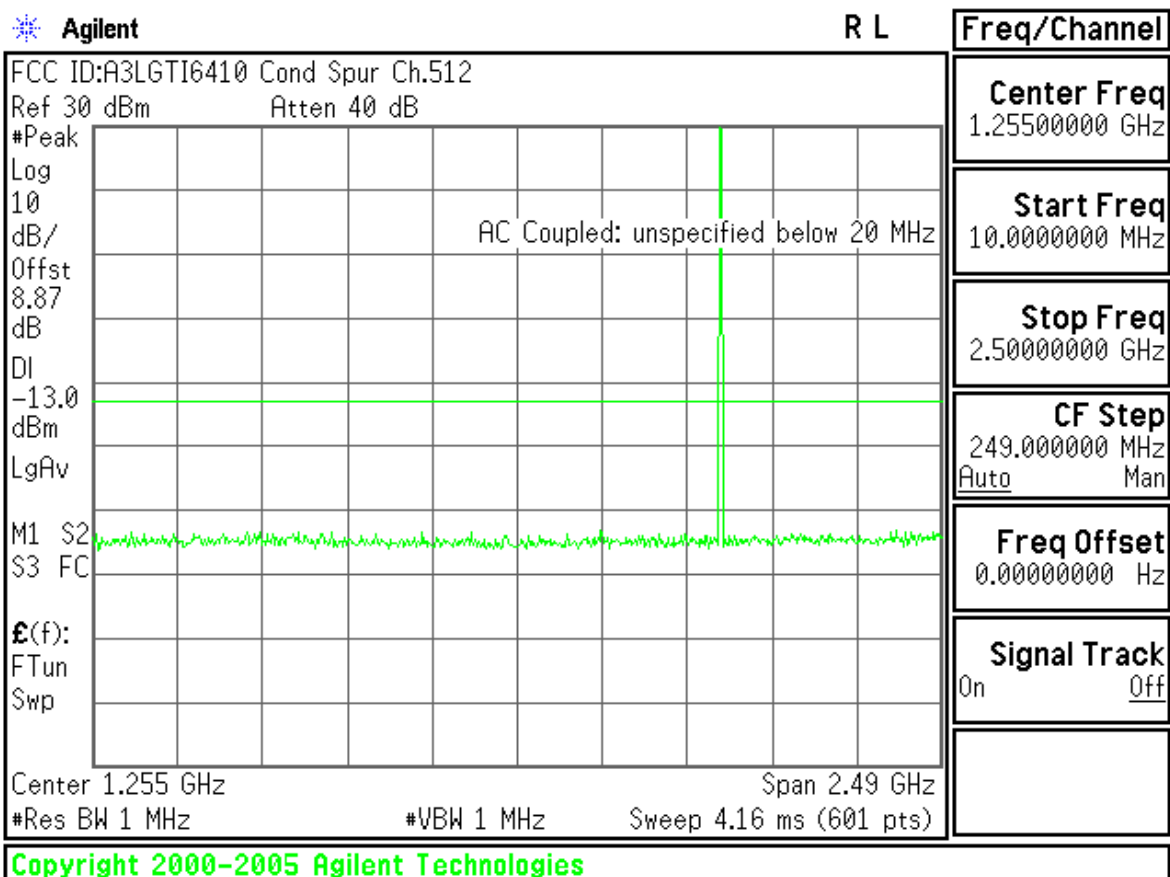

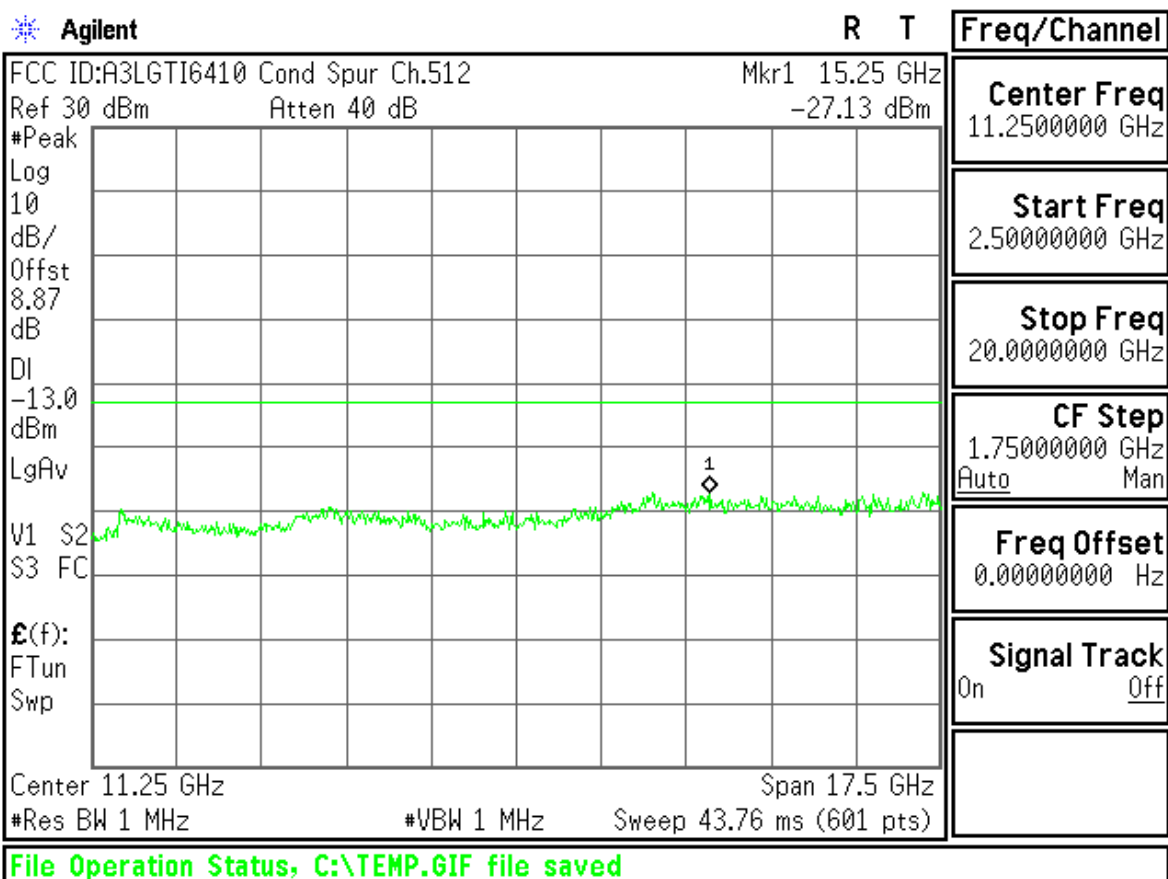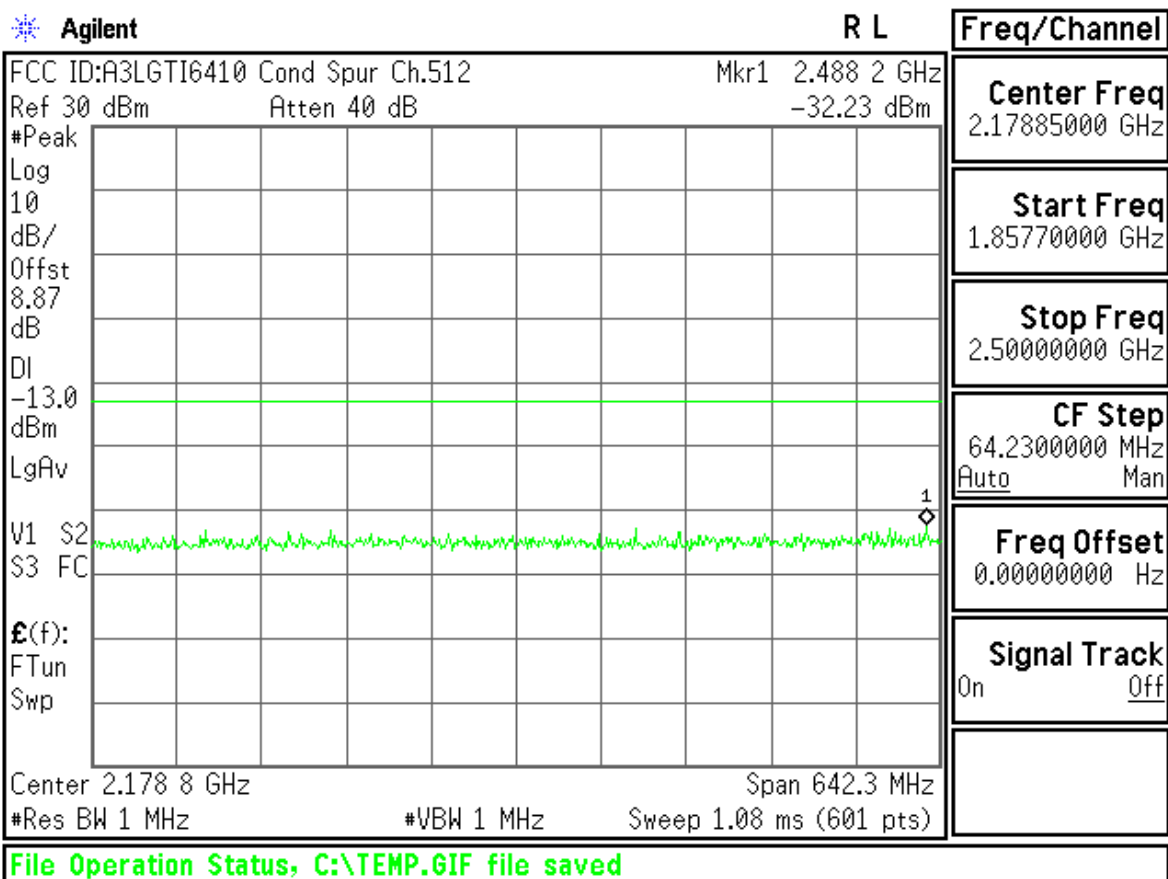

Agilent

R L

Freq/Channel

FCC ID:A3LGTI6410 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI6410 Cond Spur Ch.661

Mkr1 625 MHz

Ref 30 dBm

Atten 40 dB

-32.42 dBm

#Peak

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.12 ms (601 pts)

Center Freq
941.250000 MHz

Start Freq
10.0000000 MHz



Stop Freq
1.87250000 GHz



CF Step
186.250000 MHz
Auto Man



Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

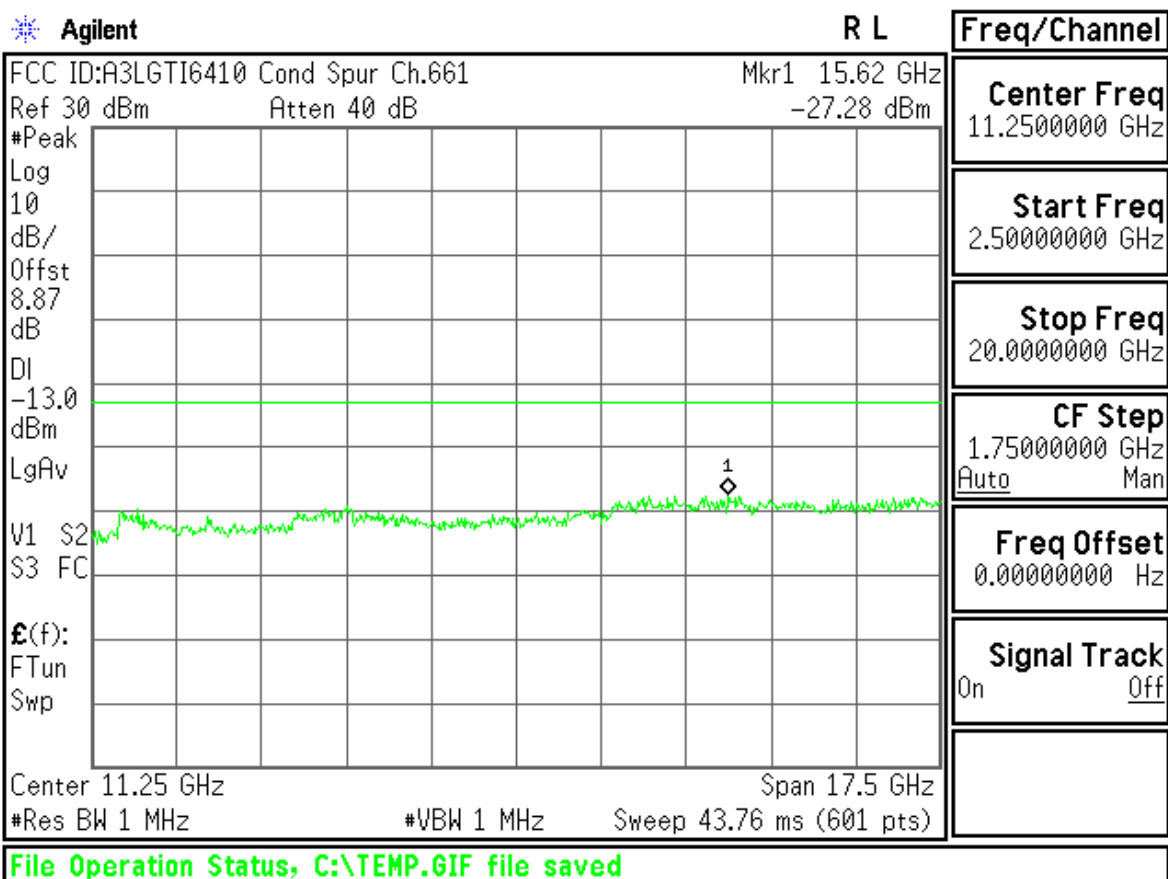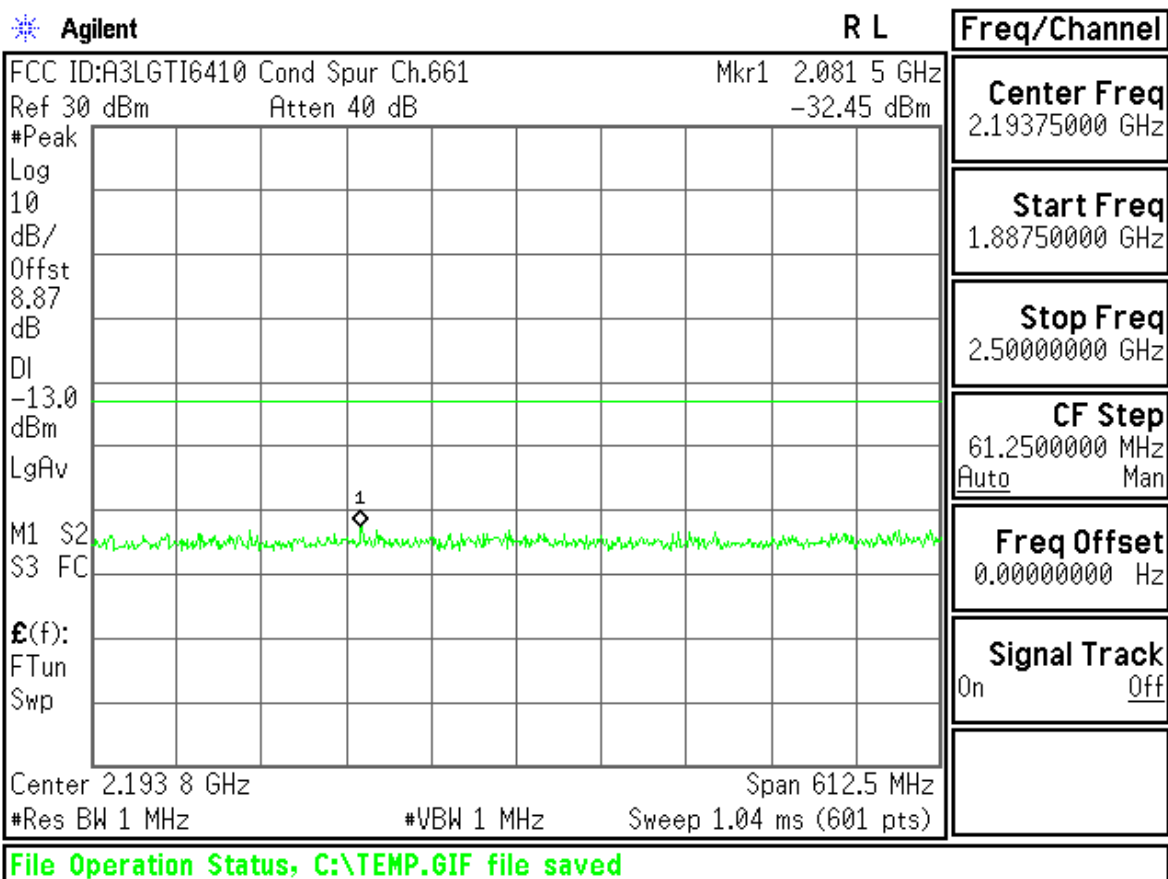

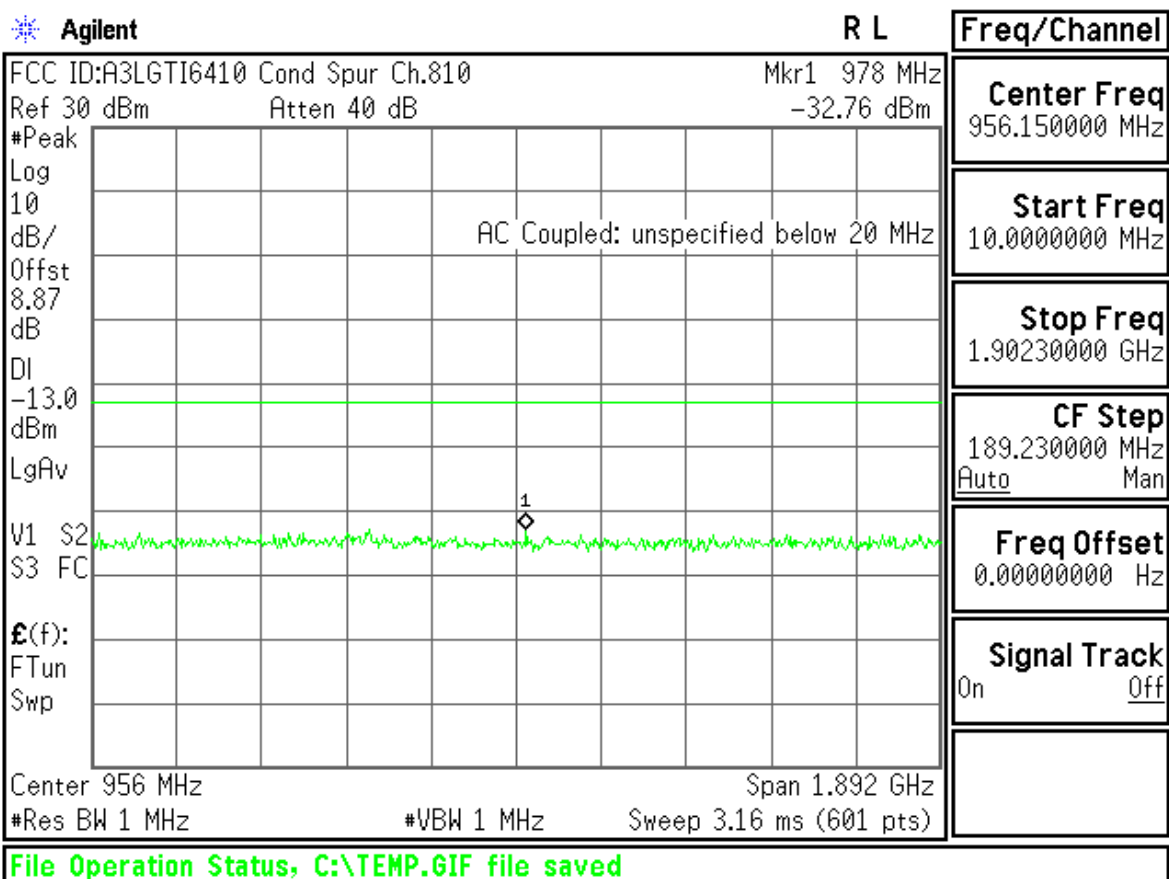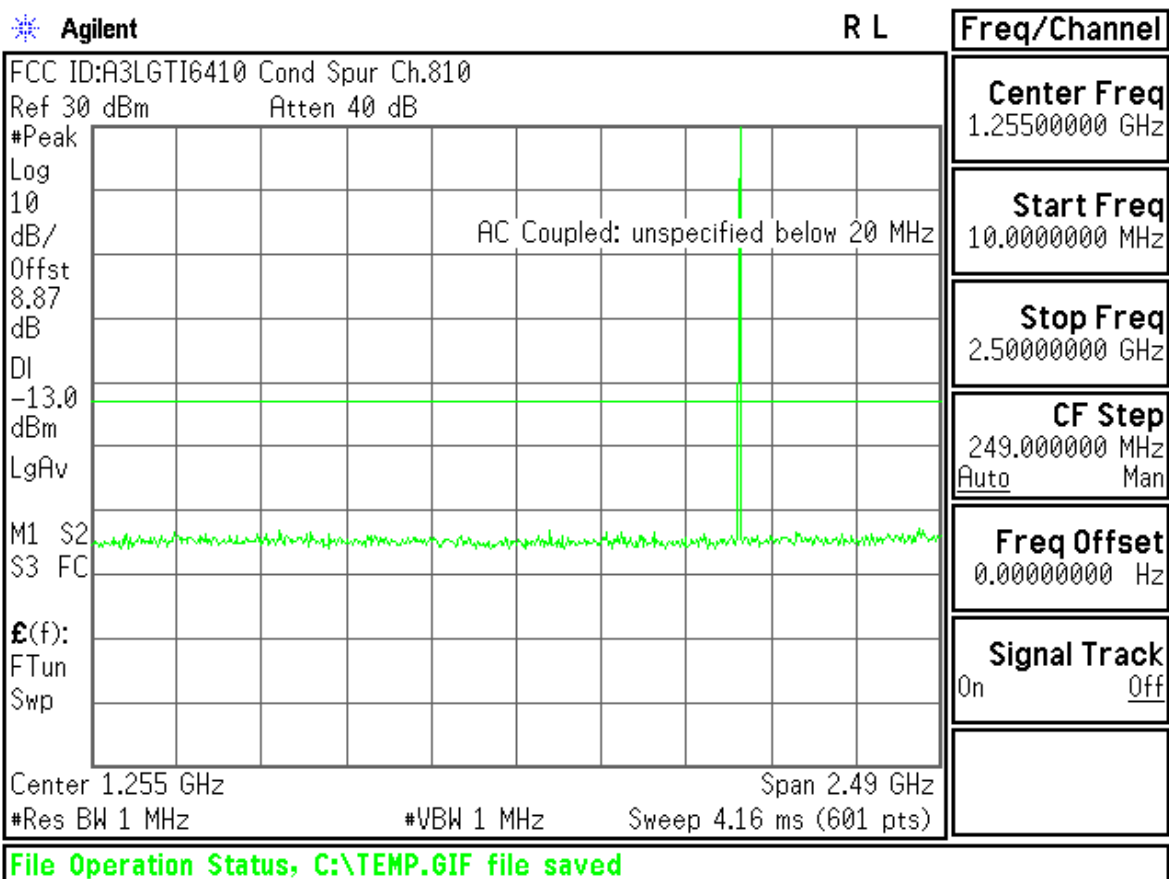

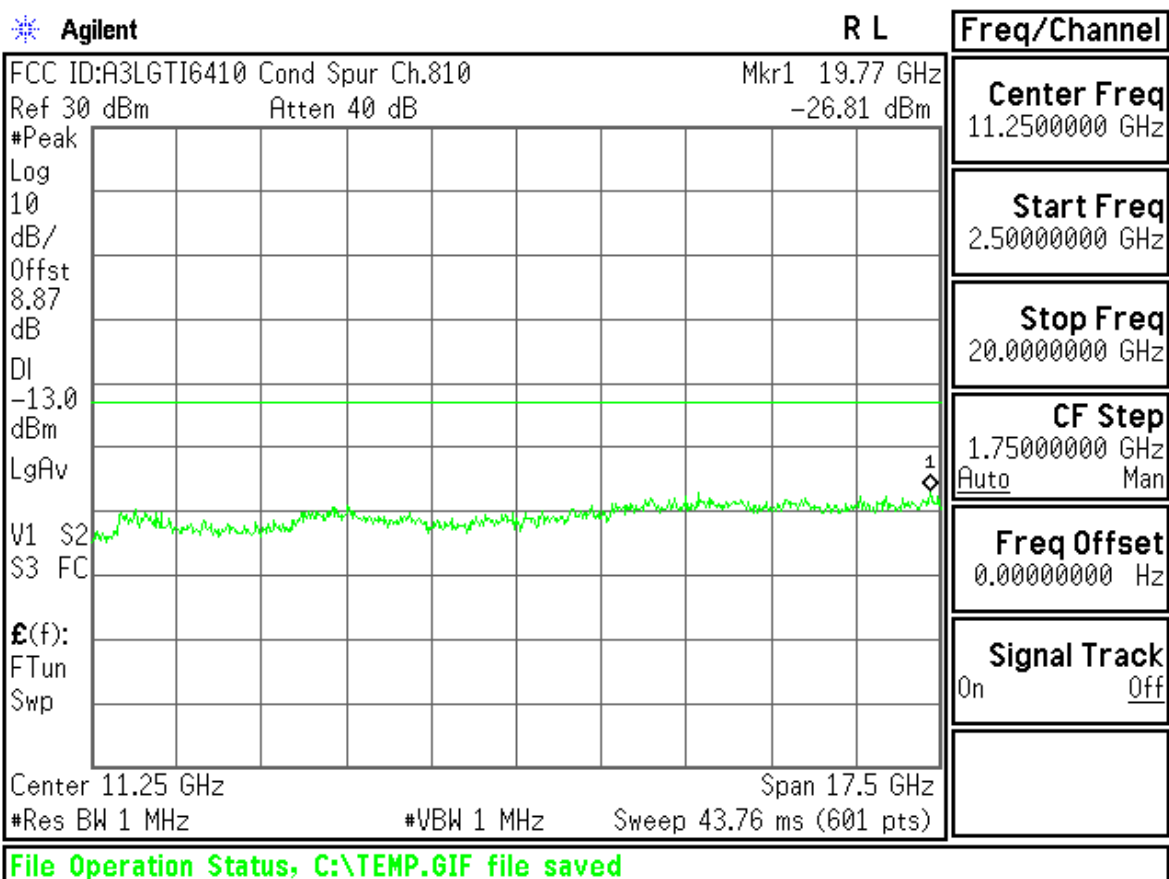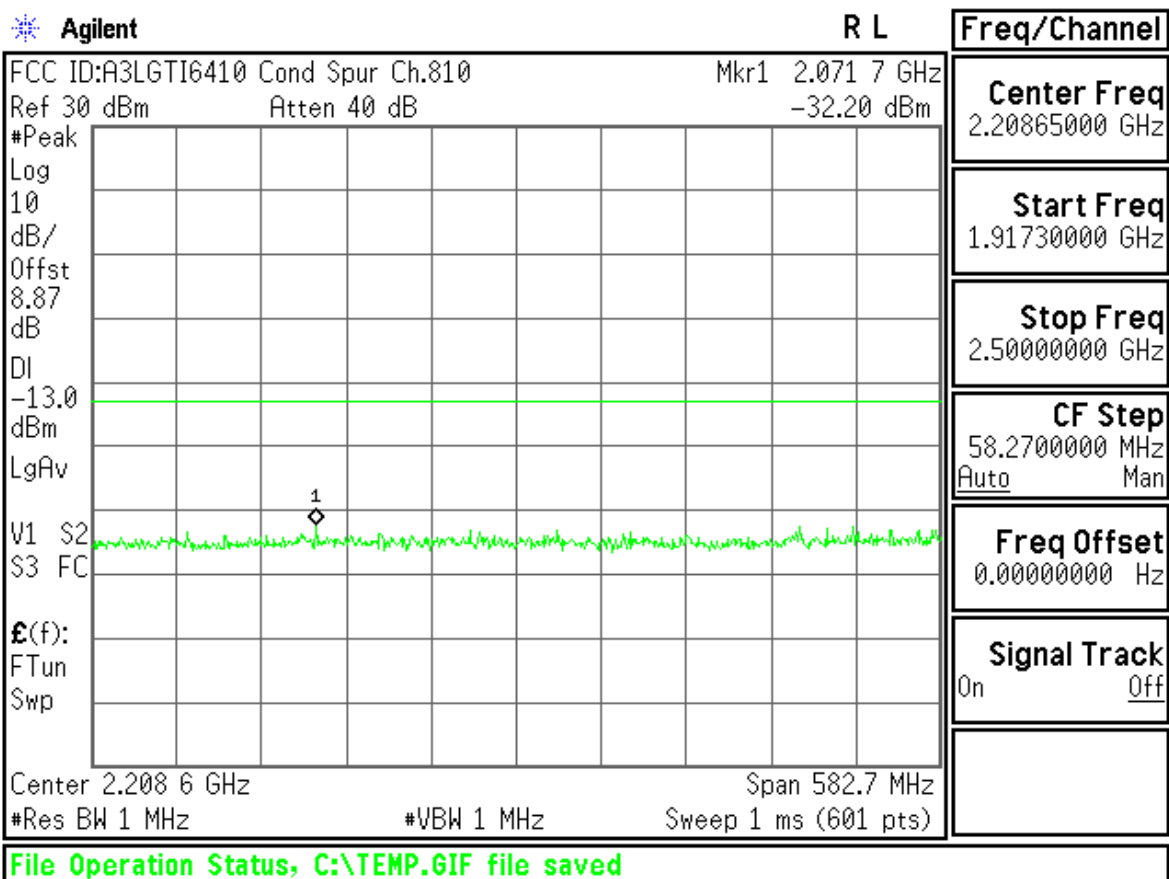

Agilent

R L

Freq/Channel

FCC ID:A3LGTI6410 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

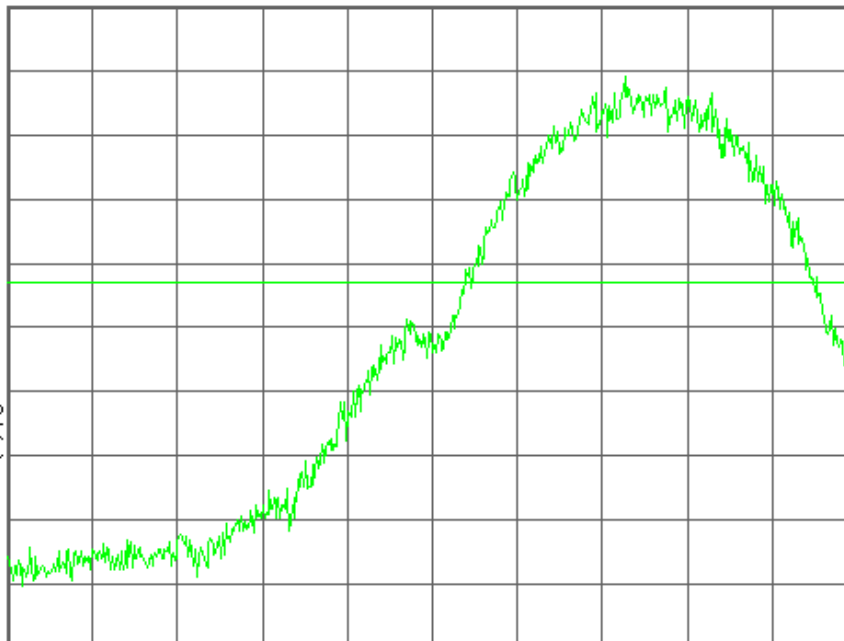

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI6410 Band Edge Ch.512

Mkr1 1.849 975 9 GHz

Ref 30 dBm

Atten 40 dB

-18.17 dBm

#Avg

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

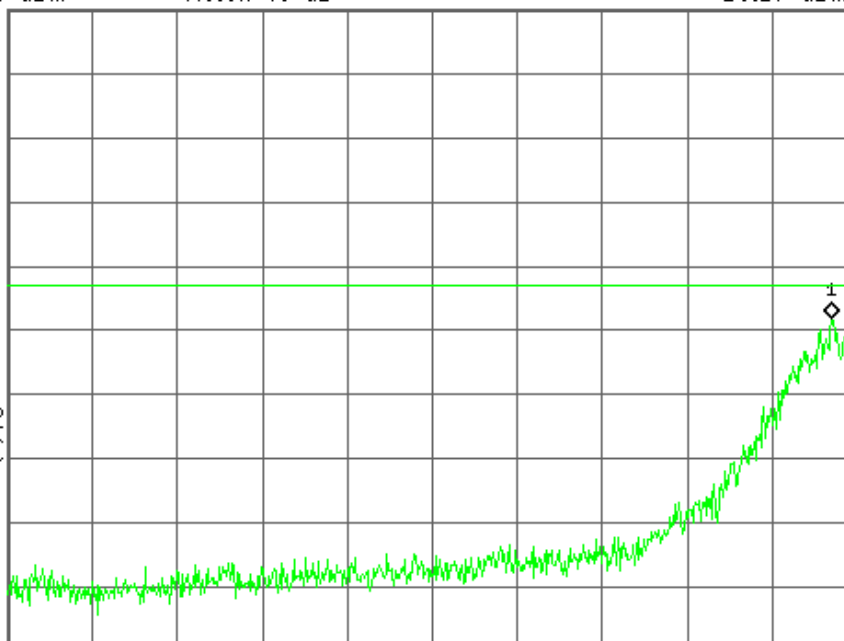

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz



Stop Freq
1.85000000 GHz


CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

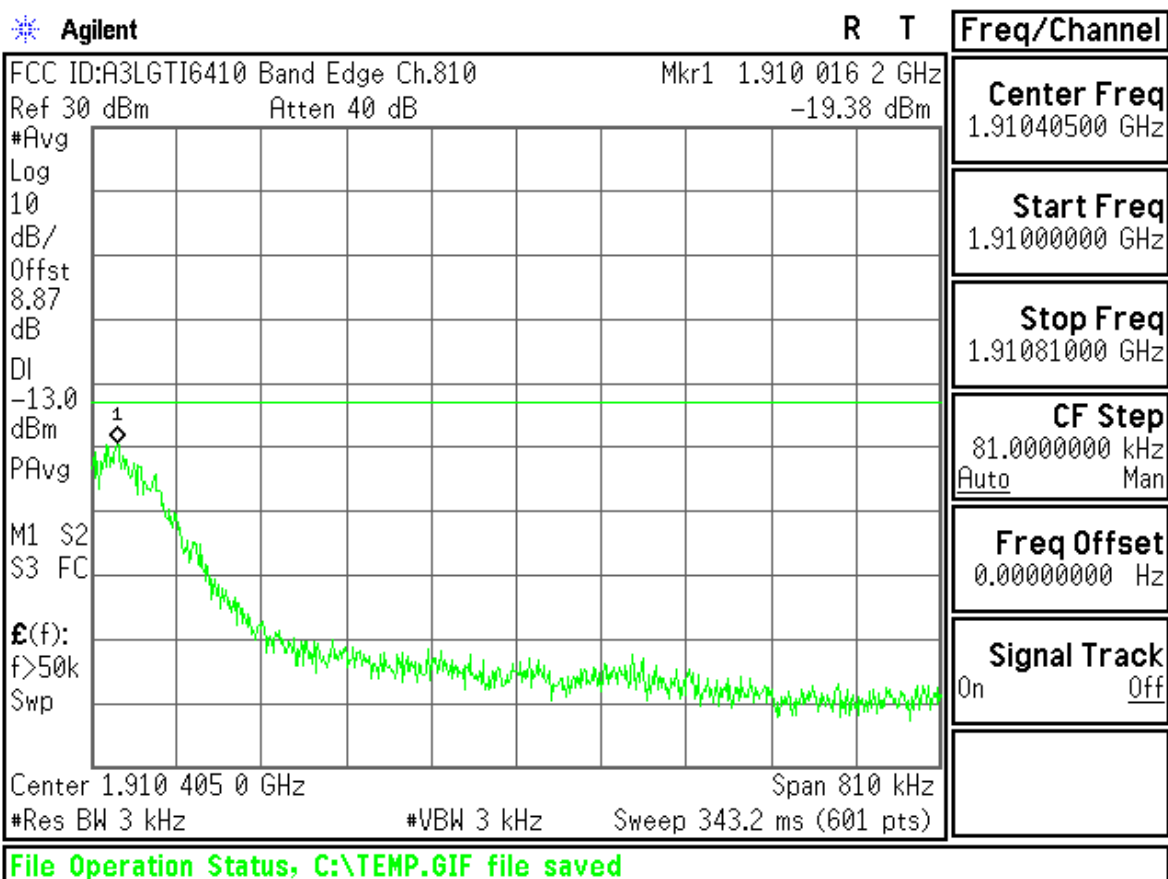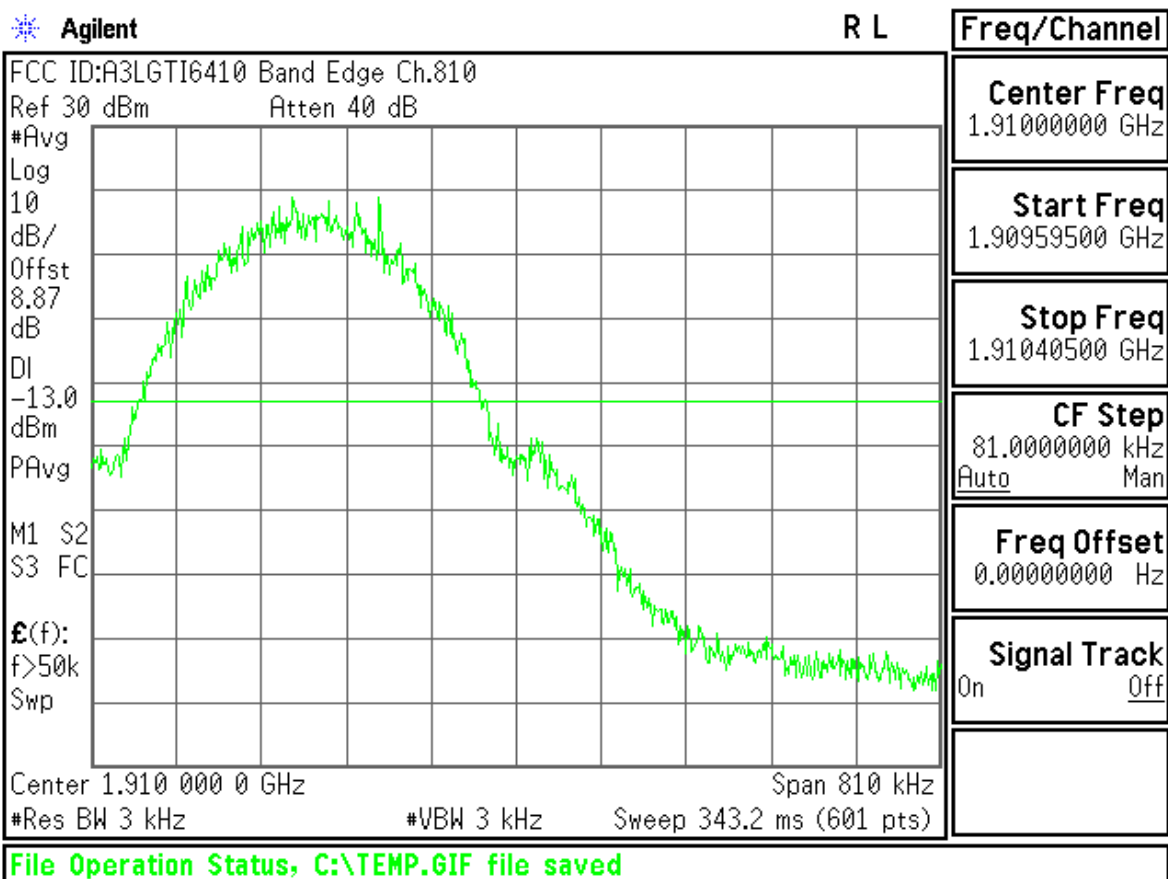

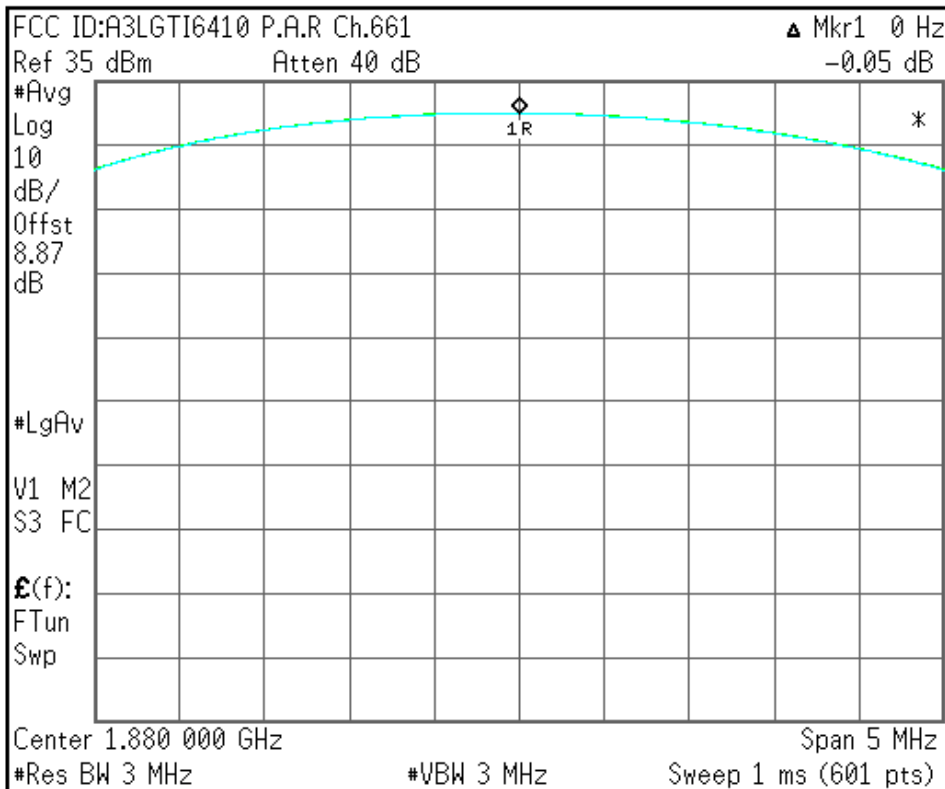

Center Freq
 1.88000000 GHz

Start Freq
 1.87750000 GHz

Stop Freq
 1.88250000 GHz

CF Step
 500.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE850

 Agilent

R T

Freq/Channel

Ch Freq 824.2 MHz Trig Free

Occupied Bandwidth

Center Freq
824.200000 MHz

Start Freq
823.700000 MHz


Stop Freq
824.700000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTI6410 0BW Ch.128 EDGE
Ref 27 dBm Atten 30 dB

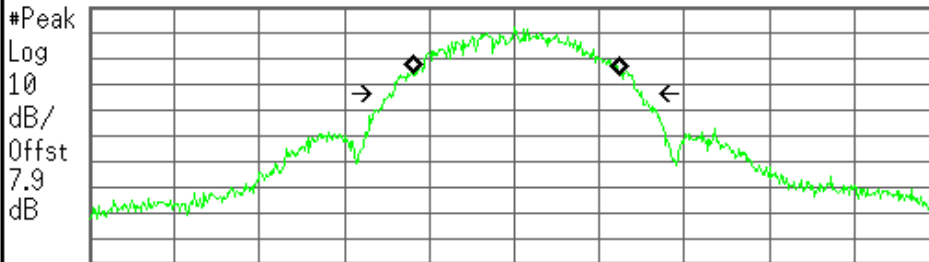

Center 824.200 MHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
246.0020 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 2.051 kHz
x dB Bandwidth 300.262 kHz

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Ch Freq 836.6 MHz Trig Free

Occupied Bandwidth

Center Freq
836.600000 MHz

Start Freq
836.100000 MHz


Stop Freq
837.100000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTI6410 0BW Ch.190 EDGE
Ref 27 dBm Atten 30 dB

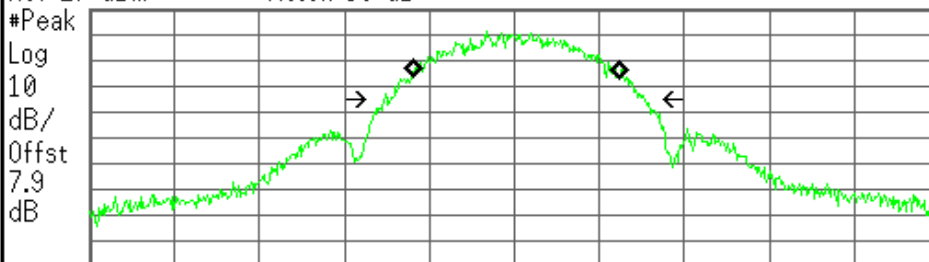


Center 836.600 MHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
244.2583 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 2.462 kHz
x dB Bandwidth 309.448 kHz

File Operation Status, C:\TEMP.GIF file saved


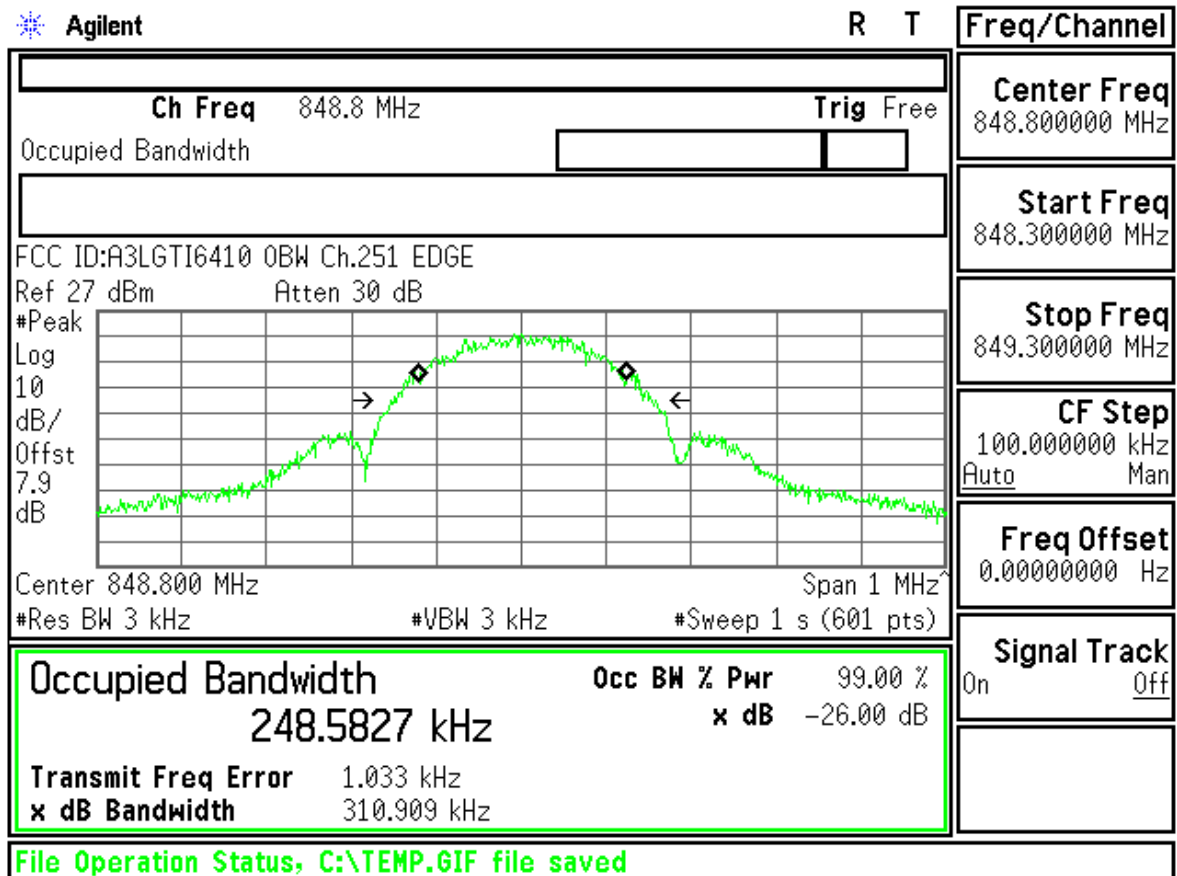




FCC ID : A3LGTI6410 Transmit Power 128CH EDGE

Control	EGPRS Transmit Power								PDCH Params	
EGPRS Transmit Power Setup ▾	EPSSK Burst Power				EPSSK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum		Maximum		Minimum		Maximum		Traffic Band	
	25.85 dBm		27.28 dBm		26.71 dBm		26.74 dBm		GSM850	
	Average		Std Dev		Average		Std Dev		Traffic Channel	
	26.68 dBm		0.22 dBm		26.72 dBm		0.01 dBm		128	
	200 /200				Single					
									HS TX Level ▾	
									Modulation Coding Scheme ▾	
								Return		
		Active Cell Transferring				Sys Type: EGPRS				
1 of 2				IntRef	Offset	R	T			1 of 2

Control	EGPRS Transmit Power								PD TCH Parms					
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾					
	Minimum		Maximum		Minimum		Maximum		Traffic Band					
	25.98 dBm		27.28 dBm		26.71 dBm		26.74 dBm		GS1850					
	Average		Std Dev		Average		Std Dev		Traffic Channel					
	26.66 dBm		0.23 dBm		26.72 dBm		0.01 dBm		190					
	200 / 200				Single									
									HS TX Level ▾					
									Modulation Coding Scheme ▾					
									Return					
			Active Cell Transferring				Sys Type: EGPRS							
1 of 2					IntRef	Offset	R	T				1 of 2		

Measurement/Instrument Screen													
Control		EGPRS Transmit Power						PDCH Parms					
EGPRS Transmit Power Setup ▾		EP SK Burst Power			EP SK Est Carrier Power			Downlink Traffic Power ▾					
		Minimum		Maximum		Minimum		Maximum		Traffic Band			
		25.89 dBm		27.31 dBm		26.77 dBm		26.79 dBm		GS1850			
		Average		Std Dev		Average		Std Dev		Traffic Channel			
		26.74 dBm		0.25 dBm		26.78 dBm		0.00 dBm		251			
		200 / 200						Single					
		Active Cell Transferring				Sys Type: EGPRS							
1 of 2						IntRef		Offset		R T		1 of 2	

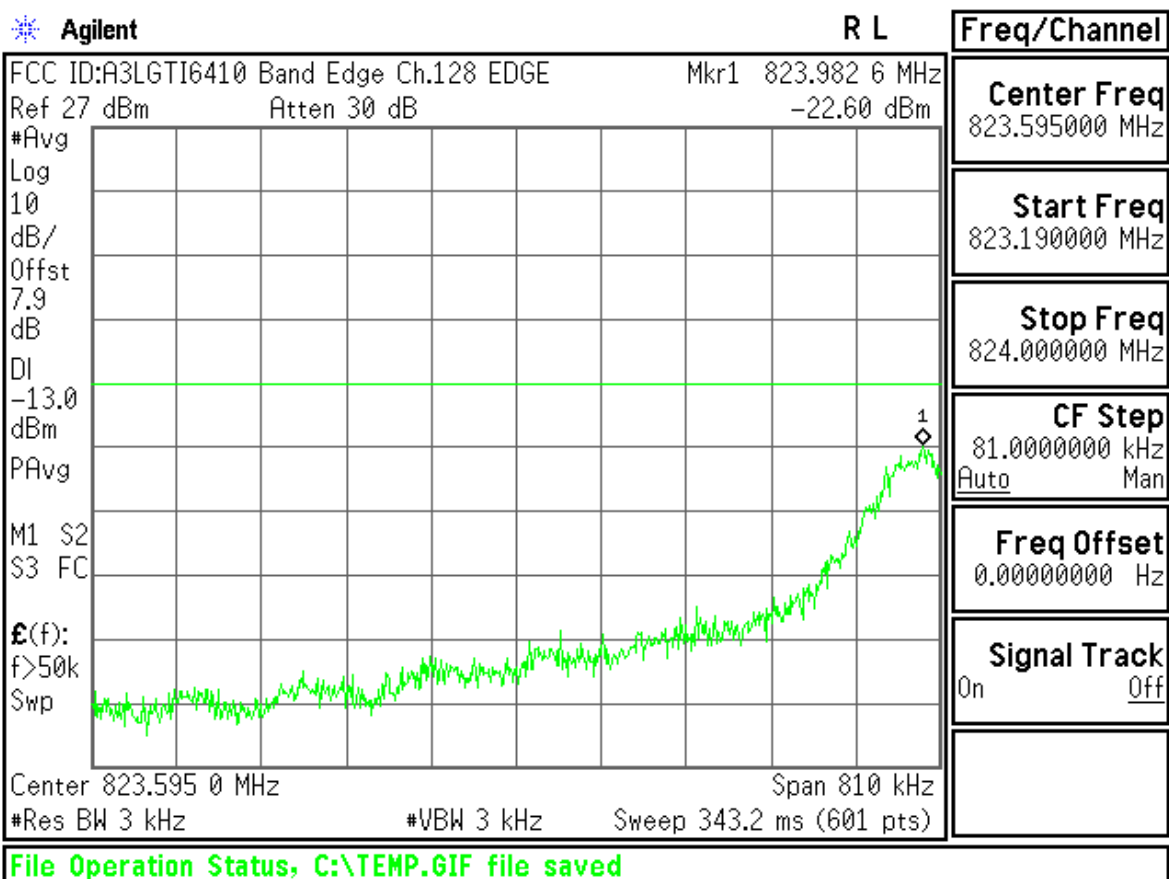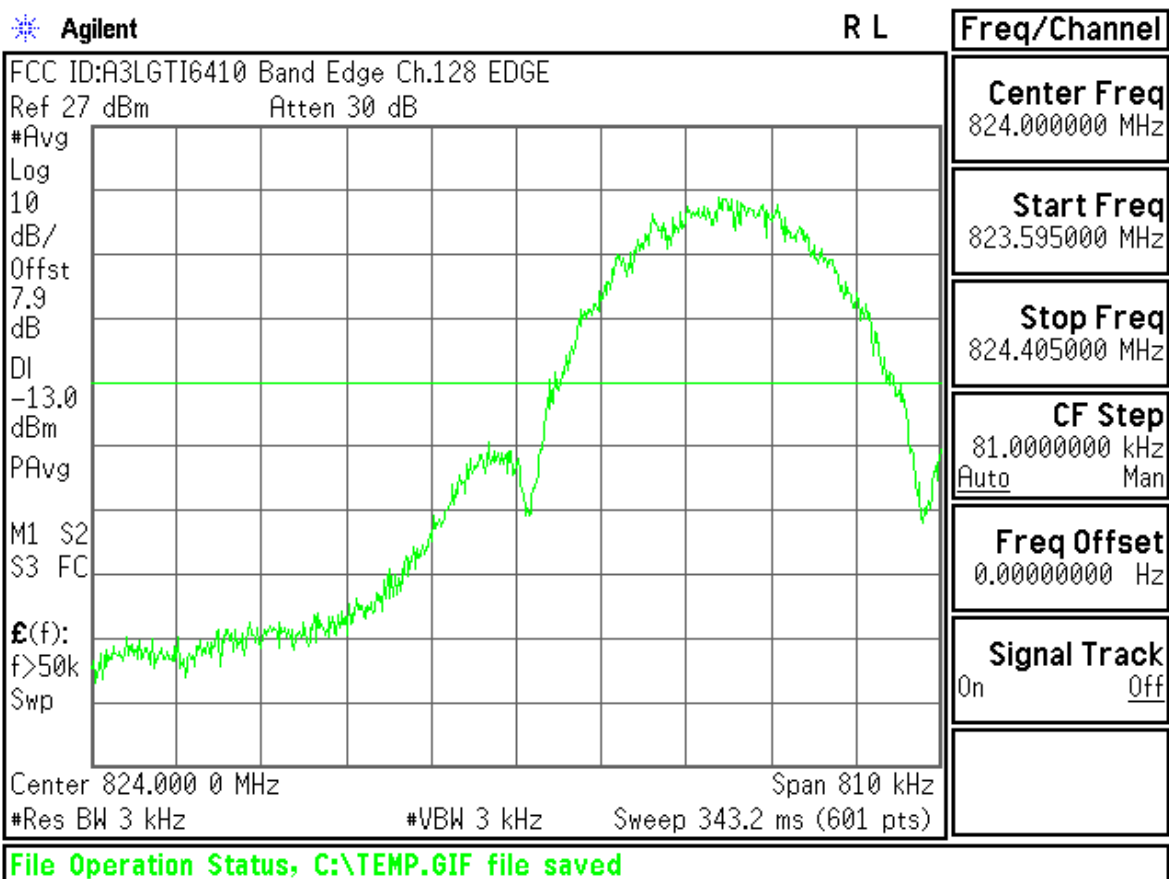

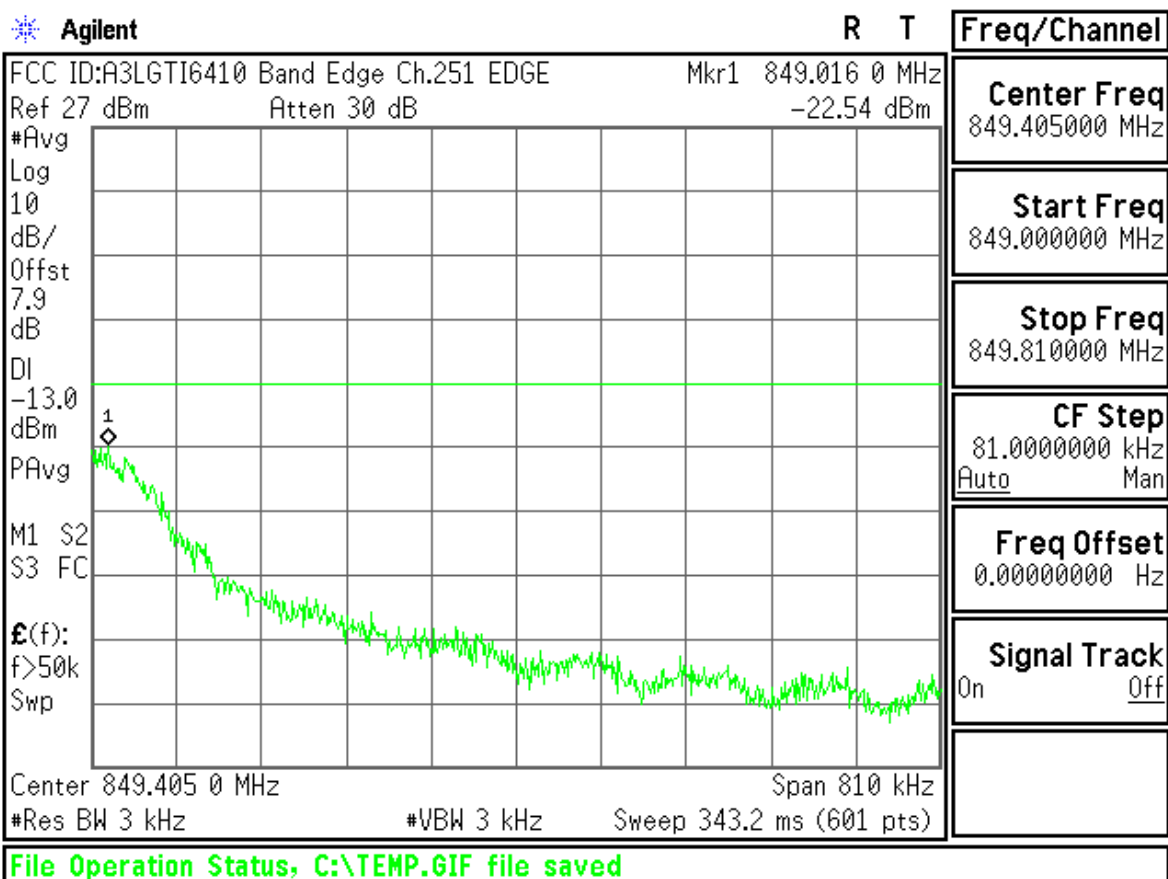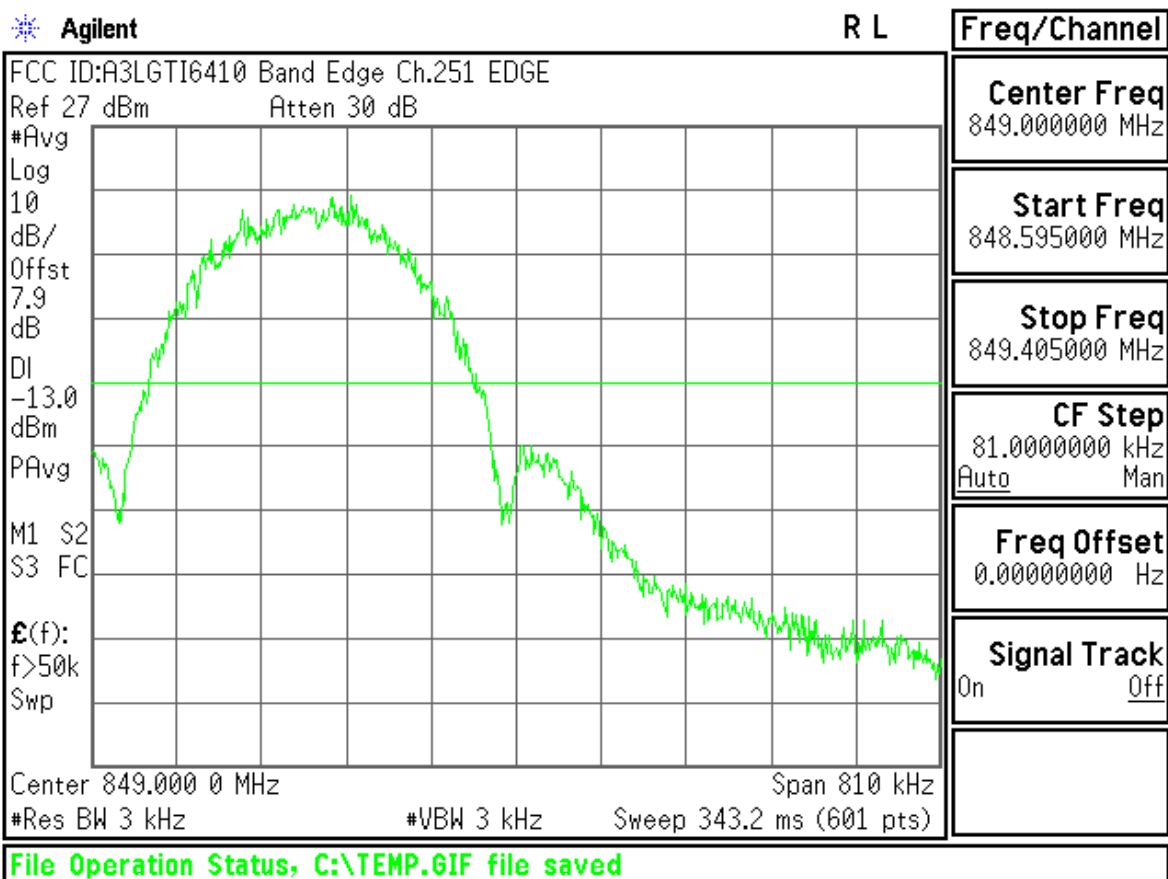

EDGE1900

 Agilent

R T

Freq/Channel

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz


Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTI6410 0BW Ch.512 EDGE
Ref 26 dBm Atten 30 dB

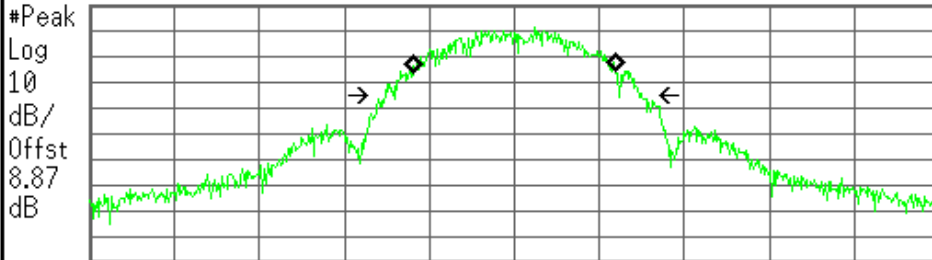

Center 1.850 200 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
243.6144 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 174.904 Hz
x dB Bandwidth 304.837 kHz

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz


Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTI6410 0BW Ch.661 EDGE
Ref 26 dBm Atten 30 dB

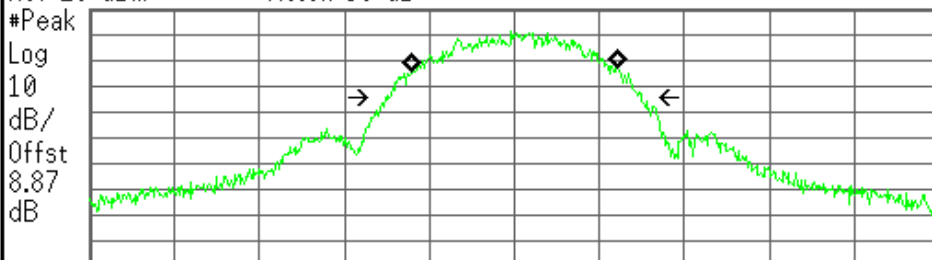


Center 1.880 000 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
245.8139 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -155.168 Hz
x dB Bandwidth 304.444 kHz

File Operation Status, C:\TEMP.GIF file saved

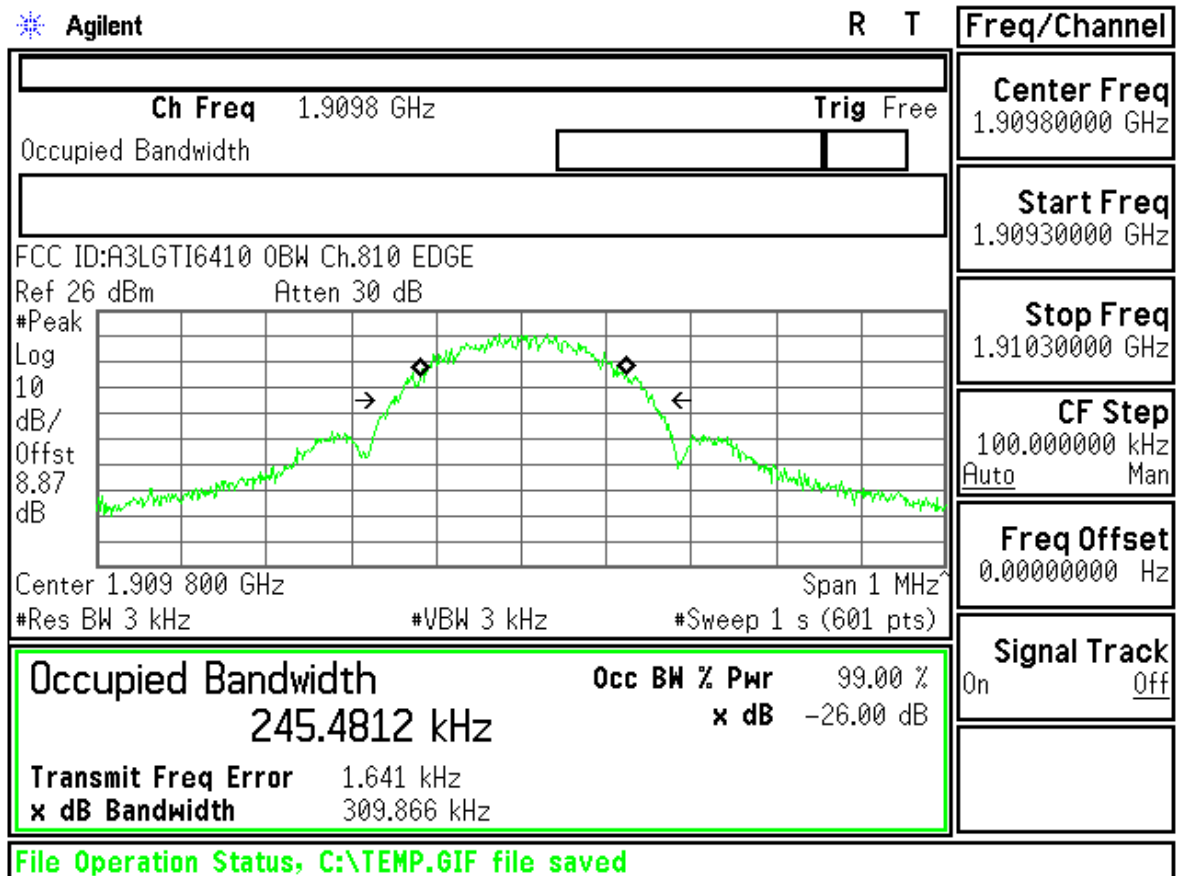

FCC ID : A3LGTI6410 Transmit Power 512CH EDGE



Measurement/Instrument Screen												
Control		EGPRS Transmit Power							PDCH Params			
EGPRS Transmit Power Setup ▾		EPSK Burst Power			EPSK Est Carrier Power				Downlink Traffic Power ▾			
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		24.71 dBm		26.14 dBm		25.49 dBm		25.52 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.48 dBm		0.26 dBm		25.50 dBm		0.01 dBm		512		
		200 /200						Single				
											HS TX Level ▾	
											Modulation Coding Scheme ▾	
											Return	
				Active Cell Transferring				Sys Type: EGPRS				
1 of 2						IntRef	Offset	R	T			
										1 of 2		



FCC ID : A3LGTI6410 Transmit Power 661CH EDGE

Measurement/Instrument Screen													
Control		EGPRS Transmit Power								PDCH Parms			
EGPRS Transmit Power Setup ▾		EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾			
		Minimum		Maximum		Minimum		Maximum		Traffic Band			
		24.78 dBm		26.45 dBm		25.82 dBm		25.84 dBm		PCS			
		Average		Std Dev		Average		Std Dev		Traffic Channel			
		25.79 dBm		0.23 dBm		25.83 dBm		0.00 dBm		661			
		200 /2C0						Single					
										HS TX Level ▾			
										Modulation Coding Scheme ▾			
										Return			
				Active Cell Transferring				Sys Type: EGPRS					
1 of 2						IntRef		Offset		R T		1 of 2	

FCC ID : A3LGTI6410 Transmit Power 810CH EDGE

Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup		EPSK Burst Power				EPSK Est Carrier Power		Downlink Traffic Power	
		Minimum 24.41 dBm	Maximum 26.10 dBm	Minimum 25.53 dBm	Maximum 25.55 dBm			Traffic Band PCS	
		Average 25.47 dBm	Std Dev 0.23 dBm	Average 25.54 dBm	Std Dev 0.00 dBm			Traffic Channel 810	
		200 /2C0				Single			
								HS TX Level	
								Modulation Coding Scheme	
								Return	
		Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T			1 of 2

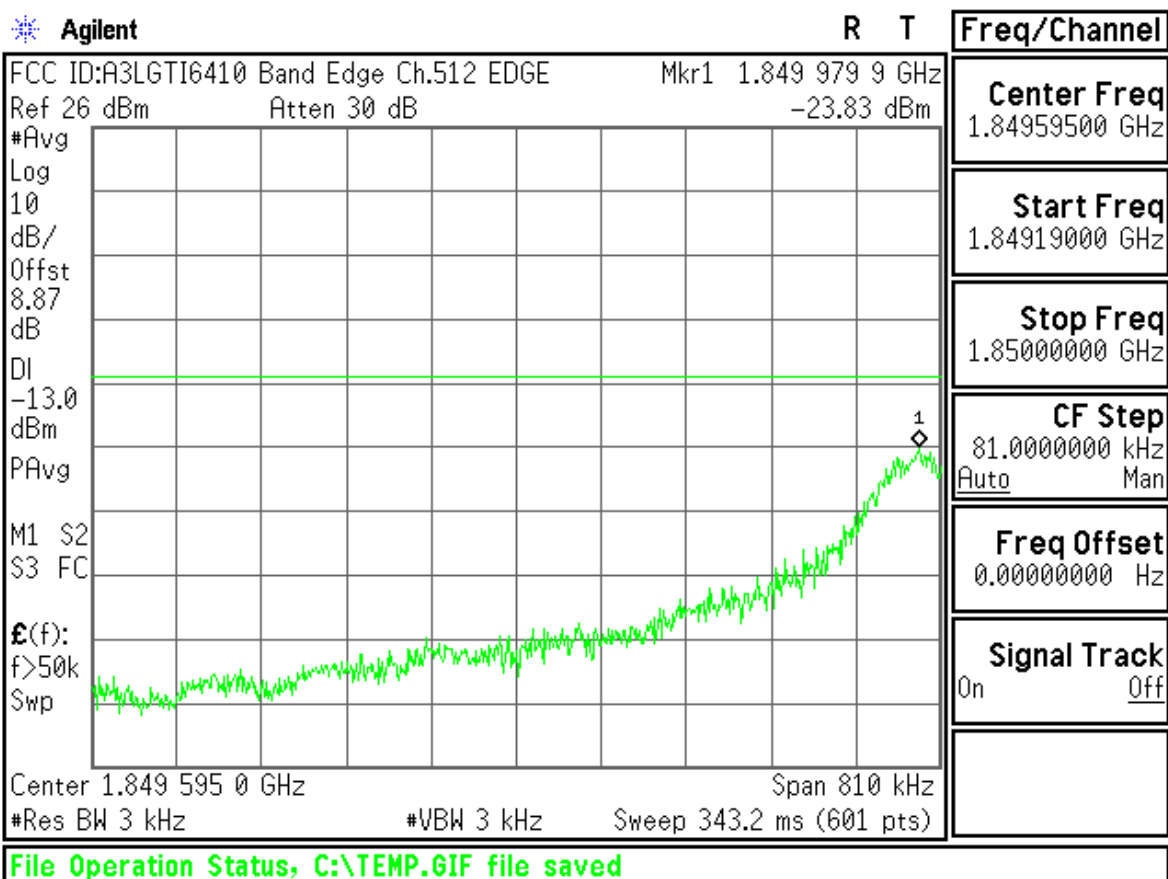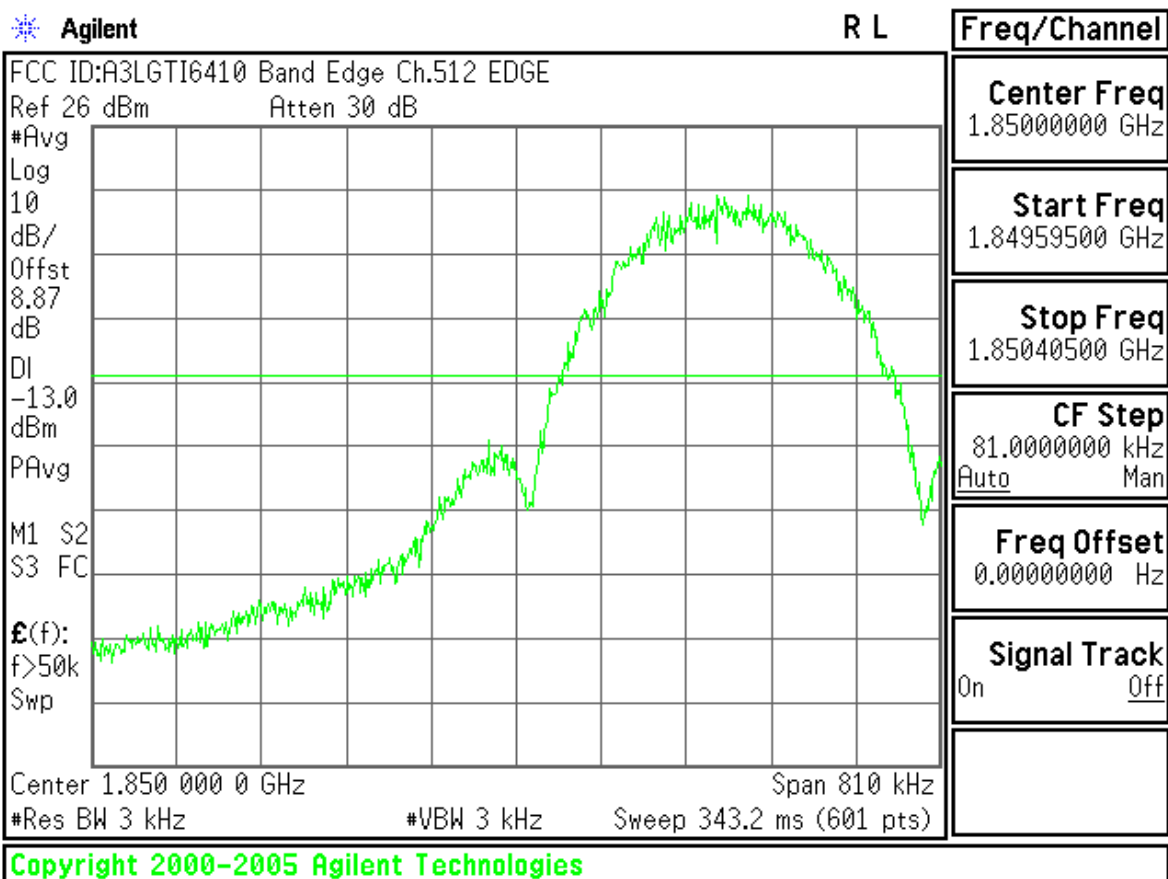

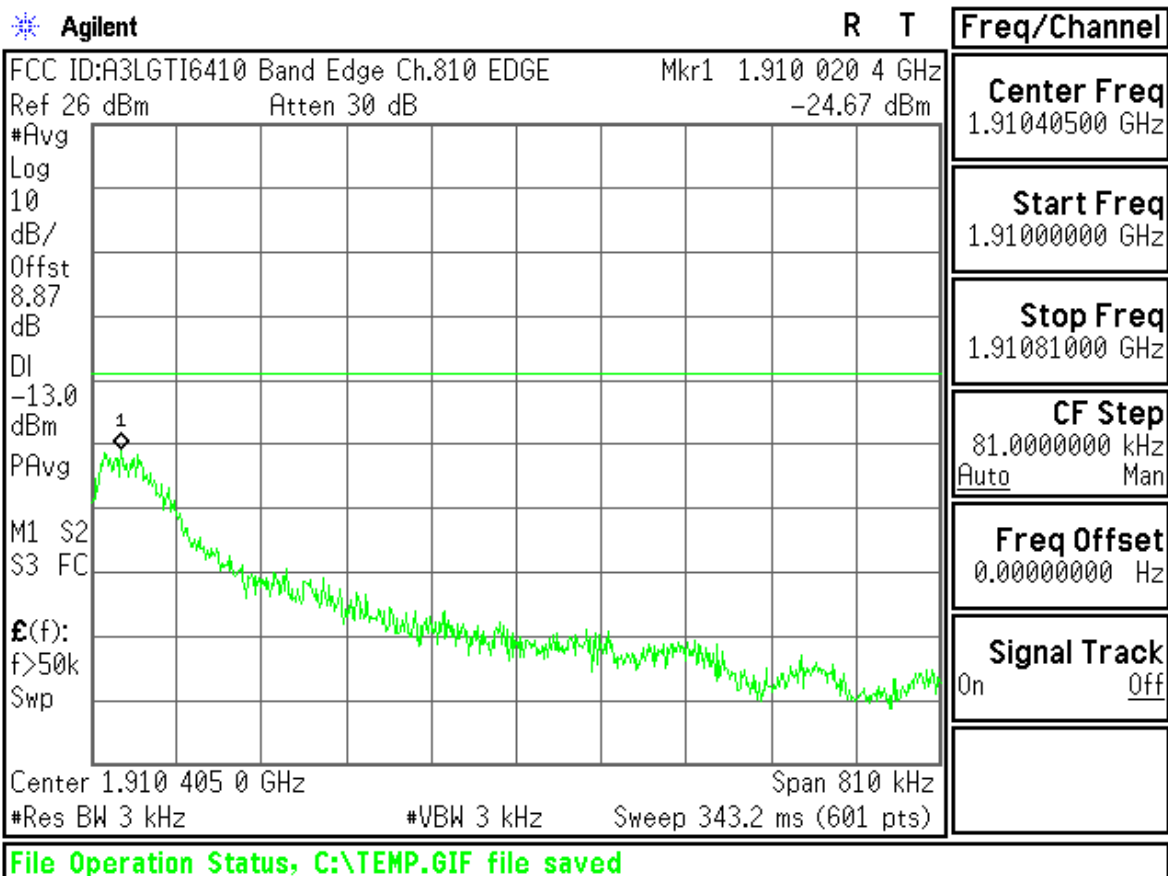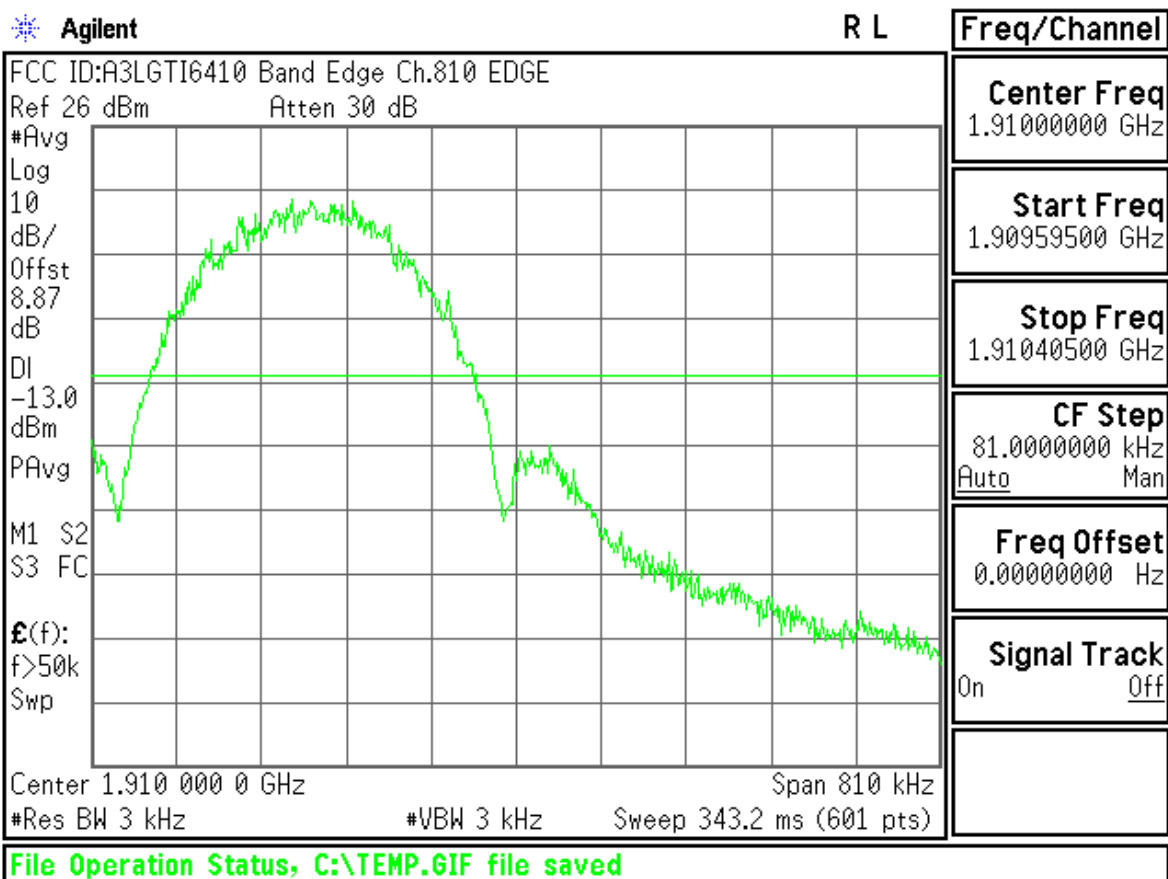

FCC ID:A3LGTI6410 P.A.R Ch.661 EDGE

▲ Mkr1 0 s

Ref 35 dBm

Atten 40 dB

0.10 dB

#Avg

Log

10

dB/

Offst

8.87

dB

#LgAv


V1 V2

S3 FC

£(f):

FTun

Swp

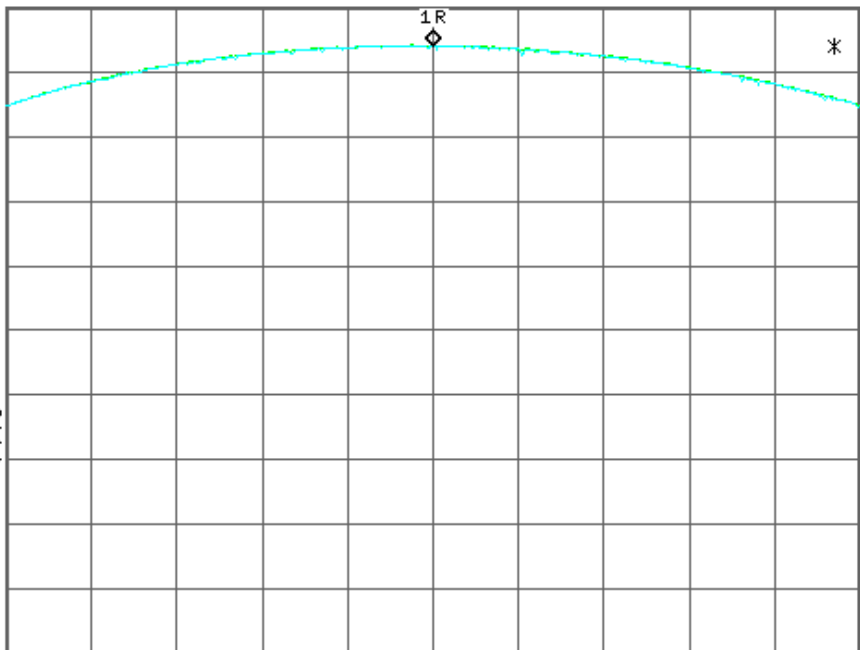

Center 1.880 000 GHz

Span 5 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2005 Agilent Technologies