



FCC TEST REPORT

FCC ID: 2A5KB-OEUP021

Maximum Permissible Exposure (MPE)

Product Name	:	Pop up socket with wireless charger
Model Name	:	OEUP021, OEUP021C, OEUP014W
Brand Name	:	N/A
Report No.	:	PTC22021500401E-FC01
Sample ID	:	PTC22021500401E-1#
Prepared for		
Hangzhou Junyue Technology Co.,Ltd		
3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou China		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



Report No.:PTC21061503304E-FC02

1TEST RESULT CERTIFICATION

Applicant's name : Hangzhou Junyue Technology Co.,ltd
Address : 3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou China
Manufacture's name : Hangzhou Junyue Technology Co.,ltd
Address : 3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou China
Product name : Pop up socket with wireless charger
Model name : OEUP021, OEUP021C, OEUP014W
Standards : FCC CFR47 Part 15C
Test procedure : ANSI C63.10:2013
Test Date : Feb.04-Mar.07 2022
Date of Issue : Mar.08 2022
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Leo Yang" with a long horizontal stroke extending to the right.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read "Chris Du" in a stylized, cursive script.

Chris Du /Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	4
2.1 INSTRUMENT LIST.....	5
3 TEST FACILITY.....	7
4 GENERAL INFORMATION.....	8
4.1 GENERAL DESCRIPTION OF E.U.T.....	8
5 RF EXPOSURE EVALUATION.....	9
5.1 LIMITS.....	9
5.2 TEST CONFIGURATION.....	9
5.3 RF EXPOSURE TEST RESULT.....	10



2 Test Summary

Test	Test Requirement	Test Method	Limit / Severity	Result
RF Exposure	FCC CRF 47 PART 1, §1.1310	KDB 680106 v03 r01	1.1310	PASS

Remark:

N/A: Not Applicable

RF: In this whole report RF means Radio Frequency.

A.M. Amplitude Modulation.

P.M. Pulse Modulation.



2.1 Instrument list

Name of Equipment	Manufacturer	Model	Characteristics	Calibration Due	interval time
Exposure Level Tester	Narda	ELT-400	Aug. 21, 2021	Aug. 20, 2022	1 year
Field strength probe	Rrankonia	EP-601	Aug. 21, 2021	Aug. 20, 2022	1 year
Field meter	AR	FM5004	Aug. 21, 2021	Aug. 20, 2022	1 year



Report No.:PTC21061503304E-FC02

2.2 Support Units

Equipment	Model No.	Series No.
Dummy load	--	--



Report No.:PTC21061503304E-FC02

3 TEST FACILITY

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Designation Number: CN1219



4 General Information

4.1 General Description of E.U.T.

Product Name	:	Pop up socket with wireless charger
Model Name	:	OEUP021, OEUP021C, OEUP014W
Operating frequency	:	110-205KHz
Antenna Type	:	Coil Antenna
Power supply	:	AC 120V 60Hz
Wireless charger	:	Rating output power:15W
Hardware Version	:	V01
Software Version	:	V01

Note: EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.



5 RF Exposure Evaluation

5.1 Limits

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/150	30
1500-100,000	--	--	1.0	30


f = frequency in MHz

*Plane-wave equivalent power density

KDB680106 D0 (3) (3) :

- A. The RF exposure test was performed in anechoic chamber.
- B. E and H field measurements should be made with the center of the probe at distance of 15cm surrounding the EUT and 20cm above the top surface of the primary/client pair.
- C. The highest emission level was recorder and compared with limit.
- D. The EUT was measured according to the dictates of KDB 680106 v03r01.

5.2 Test Configuration

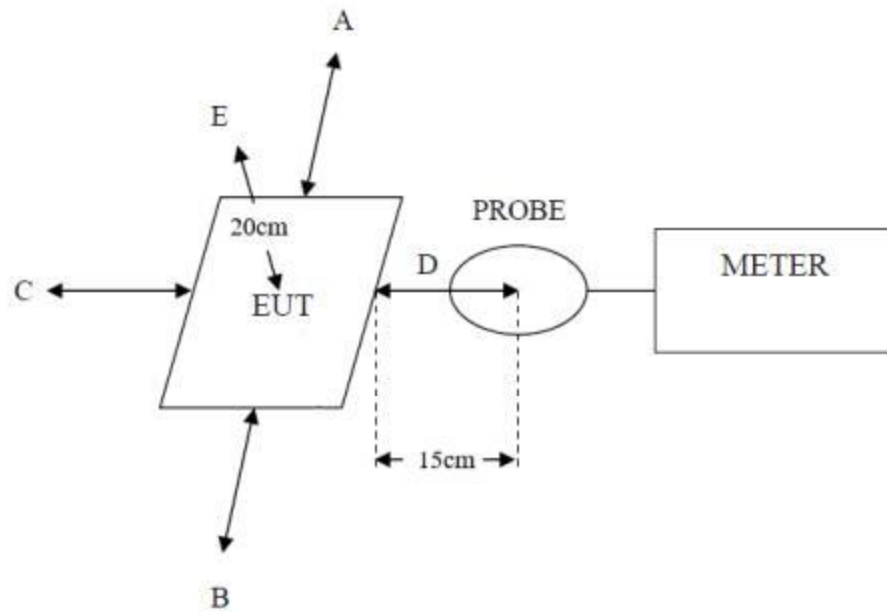

5.3 RF Exposure test result

Temperature: 24°C

Relative Humidity: 53%

EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Test result (A/m)	Limit (A/m)	Result
A: Right	15	0.0473	1.63	Passed
B: Left	15	0.0476	1.63	
C: Front	15	0.0531	1.63	
D: Back	15	0.0687	1.63	
E: Top	20	0.0907	1.63	



Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result
A: Right	15	2.33	614	Passed
B: Left	15	2.12	614	
C: Front	15	2.35	614	
D: Back	15	2.61	614	
E: Top	20	2.81	614	

5.4 Result appraise

(1) Power transfer frequency is less than 1 MHz

--Yes. it's 110-205KHz.

(2) Output power from each primary coil is less than or equal to 15 watts.

--Yes. It is max power 15W.

(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

--it is only one source primary coils.

(4) Client device is placed directly in contact with the transmitter.

--Yes. Client device is placed directly.

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

--Yes. it is not mobile production.

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those



Report No.:PTC21061503304E-FC02

coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

--Yes, it is meet the requirement.



Report No.:PTC21061503304E-FC02

6 Test Photo



*******THE END REPORT*******