



# FCC TEST REPORT

## FCC ID: 2A5KB-OEUP021

|                                                                                                |   |                                     |
|------------------------------------------------------------------------------------------------|---|-------------------------------------|
| Product Name                                                                                   | : | Pop up socket with wireless charger |
| Model Name                                                                                     | : | OEUP021, OEUP021C, OEUP014W         |
| Brand Name                                                                                     | : | N/A                                 |
| Report No.                                                                                     | : | PTC22021500401E-FC01                |
| Sample ID                                                                                      | : | PTC22021500401E-1#                  |
| <b>Prepared for</b>                                                                            |   |                                     |
| Hangzhou Junyue Technology Co.,Ltd                                                             |   |                                     |
| 3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou<br>China |   |                                     |
| <b>Prepared by</b>                                                                             |   |                                     |
| Precise Testing & Certification Co., Ltd                                                       |   |                                     |
| Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China                  |   |                                     |
|                                                                                                |   |                                     |



## 1 TEST RESULT CERTIFICATION

Applicant's name : Hangzhou Junyue Technology Co.,Ltd  
Address : 3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou China  
Manufacture's name : Hangzhou Junyue Technology Co.,Ltd  
Address : 3 Floor, Unit 4, No.2630 Yuhang Tang road, Cangqian Street, YuHang District, Hangzhou China  
Product name : Pop up socket with wireless charger  
Model name : OEUP021, OEUP021C, OEUP014W  
Standards : FCC CFR47 Part 15C  
Test procedure : ANSI C63.10:2013  
Test Date : Feb.04-Mar.07 2022  
Date of Issue : Mar.08 2022  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Leo Yang".

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read "Chris Du".

Chris Du / Manager



## Contents

|                                                       | Page      |
|-------------------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION.....</b>               | <b>2</b>  |
| <b>2 TEST SUMMARY.....</b>                            | <b>5</b>  |
| <b>3 TEST FACILITY.....</b>                           | <b>6</b>  |
| <b>4 GENERAL INFORMATION.....</b>                     | <b>7</b>  |
| 4.1 GENERAL DESCRIPTION OF E.U.T.....                 | 7         |
| 4.2 TEST MODE.....                                    | 8         |
| <b>5 EQUIPMENT DURING TEST.....</b>                   | <b>9</b>  |
| 5.1 EQUIPMENTS LIST.....                              | 9         |
| 5.2 MEASUREMENT UNCERTAINTY.....                      | 11        |
| 5.3 DESCRIPTION OF SUPPORT UNITS.....                 | 12        |
| <b>6 CONDUCTED EMISSION.....</b>                      | <b>13</b> |
| 6.1 E.U.T. OPERATION.....                             | 13        |
| 6.2 EUT SETUP.....                                    | 13        |
| 6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 14        |
| 6.4 MEASUREMENT PROCEDURE:.....                       | 14        |
| 6.5 CONDUCTED EMISSION LIMIT.....                     | 14        |
| 6.6 MEASUREMENT DESCRIPTION.....                      | 14        |
| 6.7 CONDUCTED EMISSION TEST RESULT.....               | 14        |
| <b>7 RADIATED SPURIOUS EMISSIONS.....</b>             | <b>17</b> |
| 7.1 EUT OPERATION.....                                | 17        |
| 7.2 TEST SETUP.....                                   | 18        |
| 7.3 SPECTRUM ANALYZER SETUP.....                      | 19        |
| 7.4 TEST PROCEDURE.....                               | 20        |
| 7.5 SUMMARY OF TEST RESULTS.....                      | 21        |
| <b>8 20DB BANDWIDTH.....</b>                          | <b>24</b> |
| 8.1 BLOCK DIAGRAM OF TEST SETUP.....                  | 24        |
| 8.2 RULES AND SPECIFICATIONS.....                     | 24        |
| 8.3 TEST PROCEDURE.....                               | 24        |
| 8.4 RESULT.....                                       | 24        |



Report No.: PTC22021500401E-FC01

|                    |    |
|--------------------|----|
| 9 TEST PHOTOS..... | 26 |
| 10 EUT PHOTOS..... | 28 |



## 2 Test Summary

| Test Items                  | Test Requirement | Result |
|-----------------------------|------------------|--------|
| Conduct Emission            | 15.207           | PASS   |
| Radiated Spurious Emissions | 15.209           | PASS   |
| 20dB bandwidth              | 15.215(c)        | PASS   |



Report No.: PTC22021500401E-FC01

### **3 TEST FACILITY**

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Designation Number: CN1219



## 4 General Information

### 4.1 General Description of E.U.T.

|                     |   |                                     |
|---------------------|---|-------------------------------------|
| Product Name        | : | Pop up socket with wireless charger |
| Model Name          | : | OEUP021, OEUP021C, OEUP014W         |
| Operating frequency | : | 110-205KHz                          |
| Antenna Type        | : | Coil Antenna                        |
| Power supply        | : | AC 120V 60Hz                        |
| Hardware Version    | : | V01                                 |
| Software Version    | : | V01                                 |



## 4.2 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode or test configuration mode mentioned above was evaluated respectively.

| Pretest Mode                                                   | Description                           |
|----------------------------------------------------------------|---------------------------------------|
| Mode 1                                                         | Keeping TX+10% loading Charging mode  |
| Mode 2                                                         | Keeping TX+50% loading Charging mode  |
| Mode 3                                                         | Keeping TX+100% loading Charging mode |
| Note: all mode are tested and mode 3 is worst case for record. |                                       |

### Channel list

| channel | Frequency(khz) |
|---------|----------------|
| low     | 110            |
| middle  | 160            |
| high    | 205            |

### Test channel

| channel | Frequency(khz) |
|---------|----------------|
| middle  | 160            |



## 5 Equipment During Test

### 5.1 Equipments List

RF Conducted Test

| Name of Equipment   | Manufacturer  | Model   | Serial No.   | Last calibration | Calibration Due | Calibration period |
|---------------------|---------------|---------|--------------|------------------|-----------------|--------------------|
| MXA Signal Analyzer | Agilent       | N9020A  | MY56070279   | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Coaxial Cable       | CDS           | 79254   | 46107086     | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Power Meter         | Anritsu       | ML2495A | 0949003      | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Power Sensor        | Anritsu       | MA2411B | 0917017      | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Spectrum Analyzer   | Rohde&Schwarz | FSU26   | 1166.1660.26 | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

| Name of Equipment            | Manufacturer  | Model      | Serial No.   | Last calibration | Calibration Due | Calibration period |
|------------------------------|---------------|------------|--------------|------------------|-----------------|--------------------|
| EMI Test Receiver            | Rohde&Schwarz | ESCI       | 101417       | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Loop Antenna                 | Schwarzbeck   | FMZB 1519  | 012          | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Bilog Antenna                | SCHWARZBECK   | VULB9160   | 9160-3355    | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Preamplifier (low frequency) | SCHWARZBECK   | BBV 9475   | 9745-0013    | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Cable                        | Schwarzbeck   | PLF-100    | 549489       | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Spectrum Analyzer            | Agilent       | E4407B     | MY45109572   | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Horn Antenna                 | SCHWARZBECK   | 9120D      | 9120D-1246   | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Power Amplifier              | LUNAR EM      | LNA1G18-40 | J10100000081 | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Horn Antenna                 | SCHWARZBECK   | BBHA 9170  | 9170-181     | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Amplifier                    | SCHWARZBECK   | BBV 9721   | 9721-205     | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |



Report No.: PTC22021500401E-FC01

|          |     |        |      |               |               |        |
|----------|-----|--------|------|---------------|---------------|--------|
| Cable    | H+S | CBL-26 | N/A  | Aug. 21, 2021 | Aug. 20, 2022 | 1 year |
| RF Cable | R&S | R204   | R21X | Aug. 21, 2021 | Aug. 20, 2022 | 1 year |

#### Conducted Emissions

| Name of Equipment        | Manufacturer  | Model  | Serial No. | Last calibration | Calibration Due | Calibration period |
|--------------------------|---------------|--------|------------|------------------|-----------------|--------------------|
| EMI Test Receiver        | Rohde&Schwarz | ESCI   | 101417     | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Artificial Mains Network | Rohde&Schwarz | L2-16B | 000WX31025 | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101342     | Aug. 21, 2021    | Aug. 20, 2022   | 1 year             |



## 5.2 Measurement Uncertainty

| Parameter                                                                                       | Uncertainty              |
|-------------------------------------------------------------------------------------------------|--------------------------|
| RF output power, conducted                                                                      | $\pm 1.0\text{dB}$       |
| Power Spectral Density, conducted                                                               | $\pm 2.2\text{dB}$       |
| Radio Frequency                                                                                 | $\pm 1 \times 10^{-6}$   |
| Bandwidth                                                                                       | $\pm 1.5 \times 10^{-6}$ |
| Time                                                                                            | $\pm 2\%$                |
| Duty Cycle                                                                                      | $\pm 2\%$                |
| Temperature                                                                                     | $\pm 1^\circ\text{C}$    |
| Humidity                                                                                        | $\pm 5\%$                |
| DC and low frequency voltages                                                                   | $\pm 3\%$                |
| Conducted Emissions (150kHz~30MHz)                                                              | $\pm 3.64\text{dB}$      |
| Radiated Emission(9KHz~30MHz)                                                                   | $\pm 2.54\text{dB}$      |
| Radiated Emission(30MHz~1GHz)                                                                   | $\pm 5.03\text{dB}$      |
| Radiated Emission(1GHz~25GHz)                                                                   | $\pm 4.74\text{dB}$      |
| Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95% |                          |



Report No.: PTC22021500401E-FC01

### 5.3 Description of Support Units

| Equipment  | Model No. | Series No. |
|------------|-----------|------------|
| Dummy load | --        | --         |

## 6 Conducted Emission

|                   |   |                                               |
|-------------------|---|-----------------------------------------------|
| Test Requirement: | : | FCC CFR 47 Part 15 Section 15.207             |
| Test Method:      | : | ANSI C63.10:2013                              |
| Test Result:      | : | PASS                                          |
| Frequency Range:  | : | 150kHz to 30MHz                               |
| Class/Severity:   | : | Class B                                       |
| Detector:         | : | Peak for pre-scan (9kHz Resolution Bandwidth) |


## 6.1 E.U.T. Operation

Operating Environment :


|                       |   |              |
|-----------------------|---|--------------|
| Temperature:          | : | 25.5 °C      |
| Humidity:             | : | 51 % RH      |
| Atmospheric Pressure: | : | 101.2kPa     |
| Test Voltage          | : | AC 120V/60Hz |

## 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

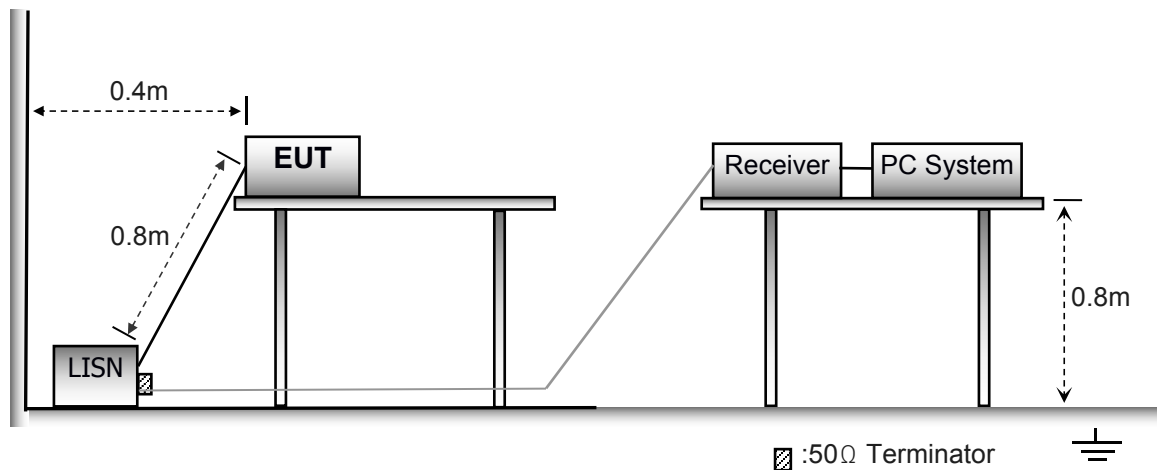

### 6.3 Test SET-UP (Block Diagram of Configuration)

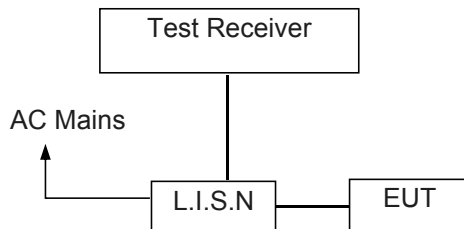

### 6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.5 Conducted Emission Limit

#### Conducted Emission

| Frequency(MHz) | Quasi-peak | Average |
|----------------|------------|---------|
| 0.15-0.5       | 66-56      | 56-46   |
| 0.5-5.0        | 56         | 46      |
| 5.0-30.0       | 60         | 50      |

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.7 Conducted Emission Test Result

Pass.




Line -120V/60Hz:

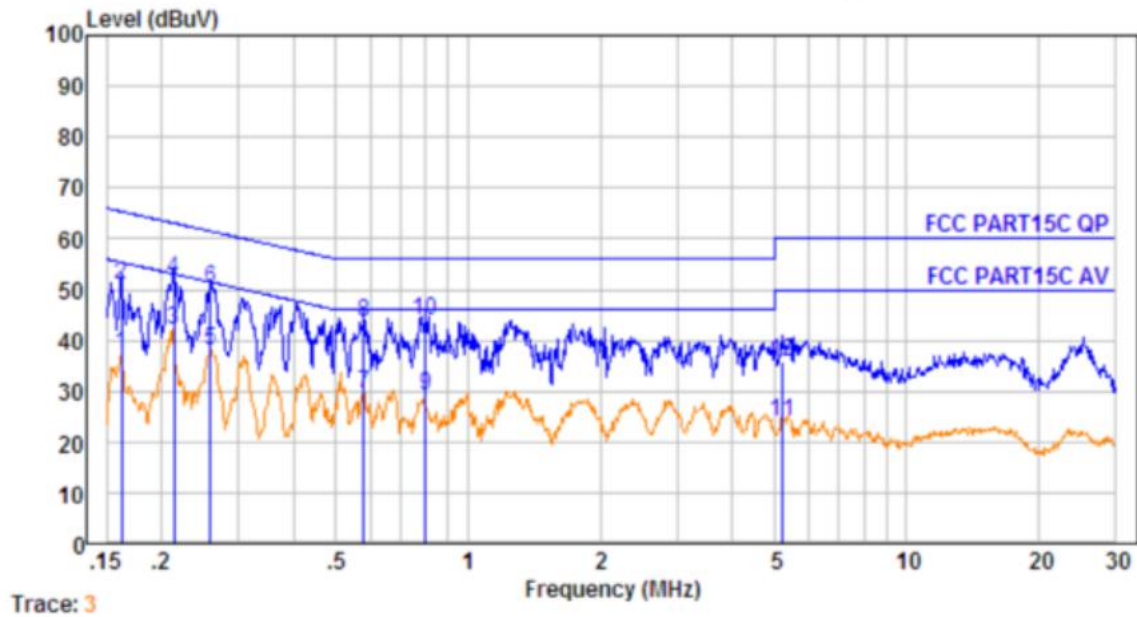

| No. | Freq<br>MHz | Cable<br>Loss<br>dB | AMN<br>Factor<br>dB | Receiver<br>Reading<br>dBuV | Emission<br>Level<br>dBuV | Limit<br>dBuV | Over<br>Limit<br>dB | Remark  |
|-----|-------------|---------------------|---------------------|-----------------------------|---------------------------|---------------|---------------------|---------|
| 1.  | 0.162       | 0.23                | 9.52                | 27.48                       | 37.23                     | 55.34         | -18.11              | Average |
| 2.  | 0.162       | 0.23                | 9.52                | 41.20                       | 50.95                     | 65.34         | -14.39              | QP      |
| 3.  | 0.214       | 0.29                | 9.60                | 32.21                       | 42.10                     | 53.05         | -10.95              | Average |
| 4.  | 0.214       | 0.29                | 9.60                | 42.30                       | 52.19                     | 63.05         | -10.86              | QP      |
| 5.  | 0.259       | 0.34                | 9.64                | 28.09                       | 38.07                     | 51.47         | -13.40              | Average |
| 6.  | 0.259       | 0.34                | 9.64                | 40.12                       | 50.10                     | 61.47         | -11.37              | QP      |
| 7.  | 0.579       | 0.43                | 9.79                | 19.48                       | 29.70                     | 46.00         | -16.30              | Average |
| 8.  | 0.579       | 0.43                | 9.79                | 33.40                       | 43.62                     | 56.00         | -12.38              | QP      |
| 9.  | 0.800       | 0.45                | 9.81                | 18.78                       | 29.04                     | 46.00         | -16.96              | Average |
| 10. | 0.800       | 0.45                | 9.81                | 33.74                       | 44.00                     | 56.00         | -12.00              | QP      |
| 11. | 5.194       | 0.51                | 9.92                | 13.39                       | 23.82                     | 50.00         | -26.18              | Average |
| 12. | 5.194       | 0.51                | 9.92                | 25.30                       | 35.73                     | 60.00         | -24.27              | QP      |



Neutral -120V/60Hz:

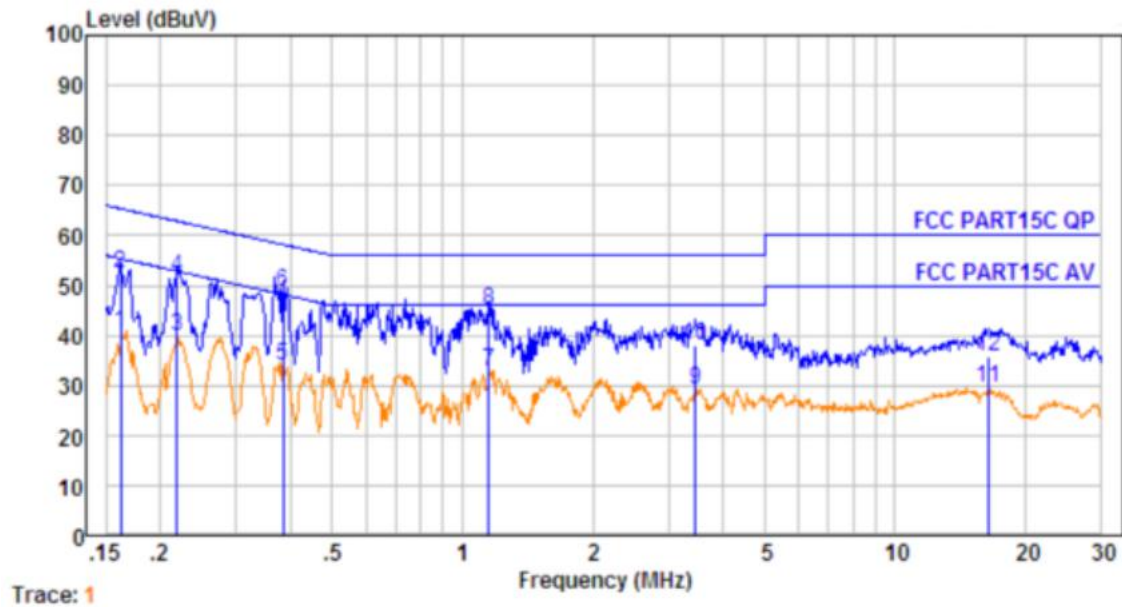

| No. | Freq<br>MHz | Cable<br>Loss<br>dB | AMN<br>Factor<br>dB | Receiver<br>Reading<br>dBuV | Emission<br>Level<br>dBuV | Limit<br>dBuV | Over<br>Limit<br>dB | Remark  |
|-----|-------------|---------------------|---------------------|-----------------------------|---------------------------|---------------|---------------------|---------|
| 1.  | 0.162       | 0.23                | 9.55                | 30.93                       | 40.71                     | 55.34         | -14.63              | Average |
| 2.  | 0.162       | 0.23                | 9.55                | 42.63                       | 52.41                     | 65.34         | -12.93              | QP      |
| 3.  | 0.219       | 0.30                | 9.64                | 29.76                       | 39.70                     | 52.88         | -13.18              | Average |
| 4.  | 0.219       | 0.30                | 9.64                | 41.70                       | 51.64                     | 62.88         | -11.24              | QP      |
| 5.  | 0.385       | 0.40                | 9.76                | 23.88                       | 34.04                     | 48.17         | -14.13              | Average |
| 6.  | 0.385       | 0.40                | 9.76                | 38.59                       | 48.75                     | 58.17         | -9.42               | QP      |
| 7.  | 1.153       | 0.46                | 9.86                | 22.40                       | 32.72                     | 46.00         | -13.28              | Average |
| 8.  | 1.153       | 0.46                | 9.86                | 34.52                       | 44.84                     | 56.00         | -11.16              | QP      |
| 9.  | 3.454       | 0.47                | 9.93                | 18.62                       | 29.02                     | 46.00         | -16.98              | Average |
| 10. | 3.454       | 0.47                | 9.93                | 27.48                       | 37.88                     | 56.00         | -18.12              | QP      |
| 11. | 16.486      | 0.50                | 10.04               | 18.93                       | 29.47                     | 50.00         | -20.53              | Average |
| 12. | 16.486      | 0.50                | 10.04               | 25.26                       | 35.80                     | 60.00         | -24.20              | QP      |



## 7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209  
 Test Method : ANSI C63.10:2013  
 Test Result : PASS  
 Measurement Distance : 3m  
 Limit : See the follow table

| Frequency (MHz) | Field Strength        |              | Field Strength Limit at 3m Measurement Dist |                                       |
|-----------------|-----------------------|--------------|---------------------------------------------|---------------------------------------|
|                 | uV/m                  | Distance (m) | uV/m                                        | dBuV/m                                |
| 0.009 ~ 0.490   | $2400/F(\text{kHz})$  | 300          | $10000 * 2400/F(\text{kHz})$                | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705   | $24000/F(\text{kHz})$ | 30           | $100 * 24000/F(\text{kHz})$                 | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30      | 30                    | 30           | $100 * 30$                                  | $20\log^{(30)} + 40$                  |
| 30 ~ 88         | 100                   | 3            | 100                                         | $20\log^{(100)}$                      |
| 88 ~ 216        | 150                   | 3            | 150                                         | $20\log^{(150)}$                      |
| 216 ~ 960       | 200                   | 3            | 200                                         | $20\log^{(200)}$                      |
| Above 960       | 500                   | 3            | 500                                         | $20\log^{(500)}$                      |

### 7.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C  
 Humidity : 51.1 % RH  
 Atmospheric Pressure : 101.2kPa


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

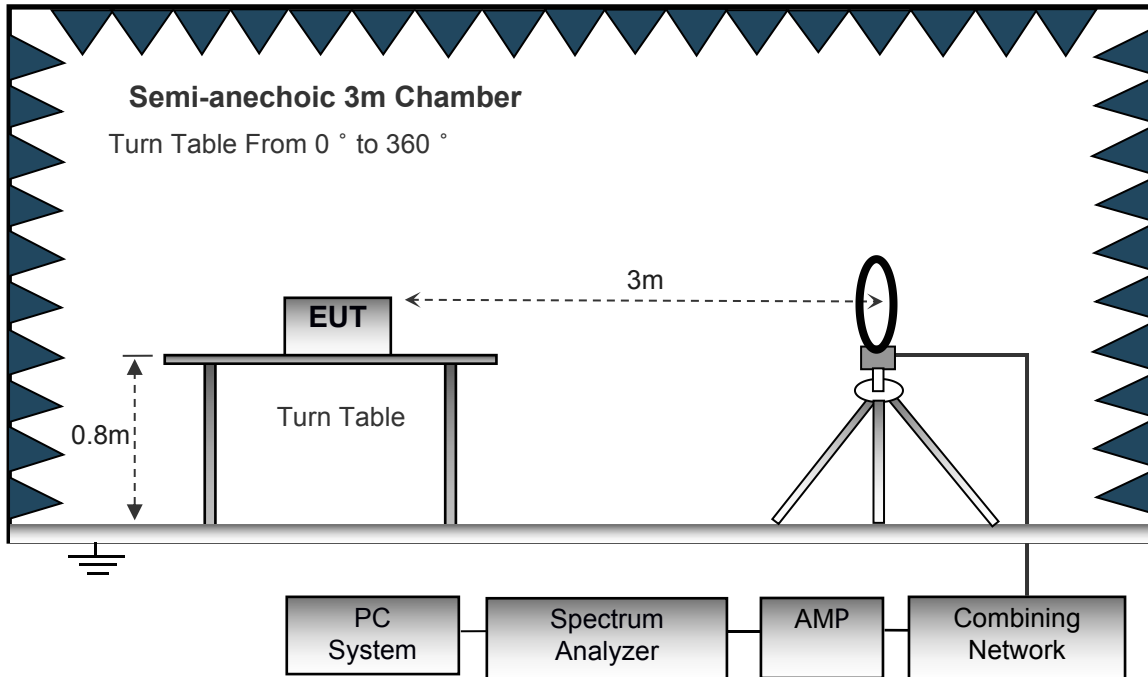

The test setup for emission measurement from 30 MHz to 1 GHz.

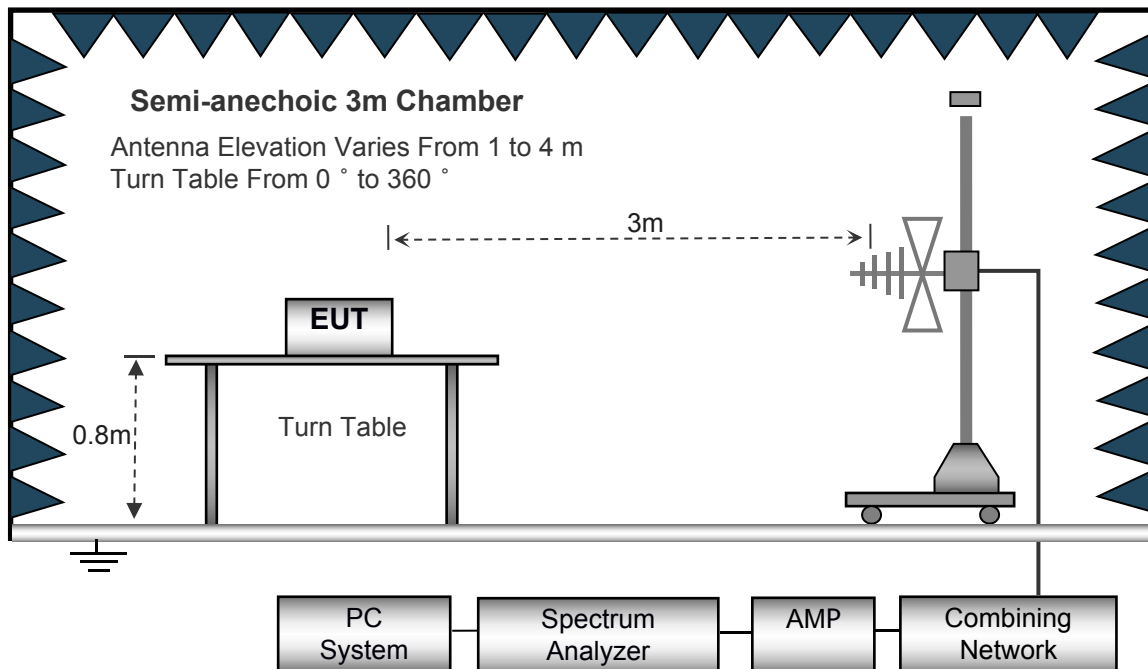

The test setup for emission measurement above 1 GHz.

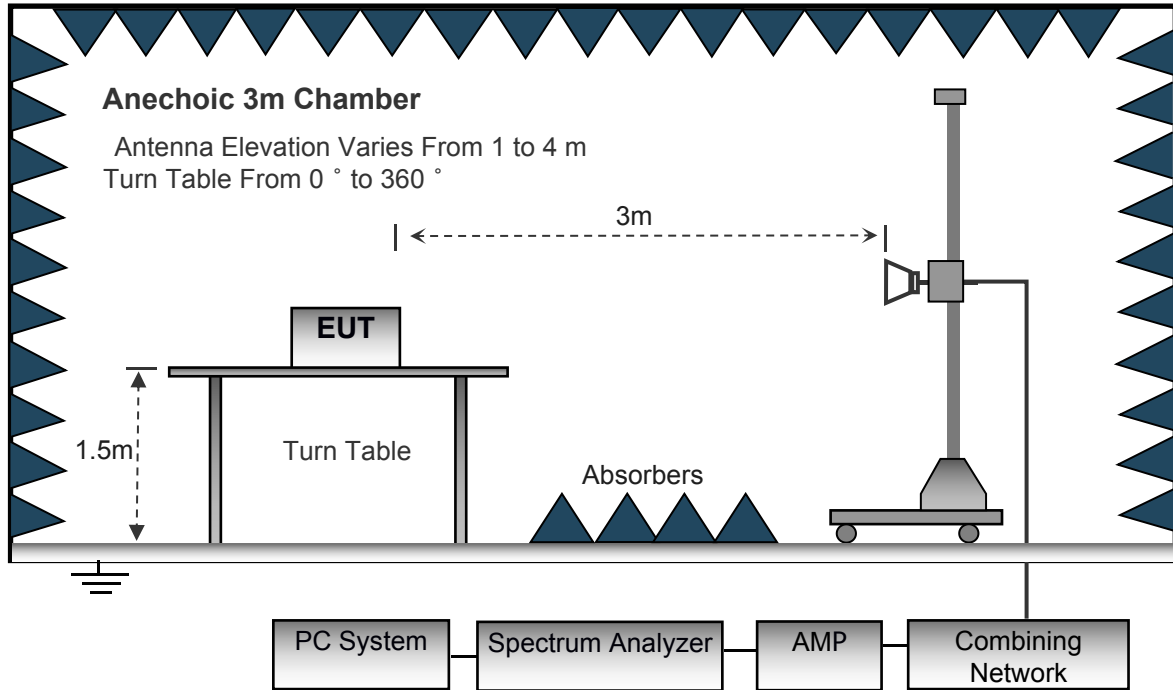

### 7.3 Spectrum Analyzer Setup

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |




## 7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



## 7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

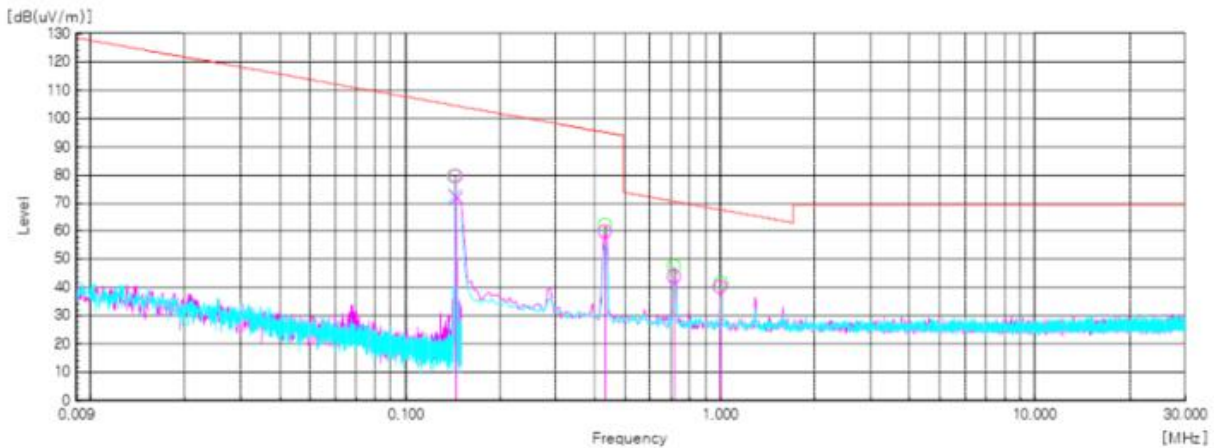


| Frequency (MHZ) | Reading (dBuV) | POL (H/V) | CABLE LOSS (dB) | AMP GAIN (dB) | ANTENNA FACTOR (dB) | FACTOR (dB) | 3m field strength (dBuV/m) | Result at 300m (dBuV/m) | Limit at 300m (dBuV/m) | Margin (dB) | remark |
|-----------------|----------------|-----------|-----------------|---------------|---------------------|-------------|----------------------------|-------------------------|------------------------|-------------|--------|
| 0.125           | 97.20          | H         | 0.55            | -32.76        | 19.91               | -12.30      | 84.90                      | 4.90                    | 25.67                  | 20.77       | PK     |
| 0.430           | 72.30          | H         | 0.58            | -32.73        | 19.76               | -12.40      | 59.90                      | -20.10                  | 14.93                  | 35.03       | PK     |
| 0.717           | 56.20          | H         | 0.70            | -32.73        | 19.73               | -12.30      | 43.90                      | 3.90                    | 30.49                  | 26.59       | PK     |
| 1.004           | 52.40          | H         | 0.82            | -32.72        | 19.70               | -12.20      | 40.20                      | 0.20                    | 27.57                  | 27.37       | PK     |

Remark: According to FCC Part 15.209(d), the emission limits for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emission limits in these three bans are based on measurements employing an average detector. The value PK>QP>AV, so it is regular.




Test Frequency: 30MHz ~ 1GHz

Horizontal:

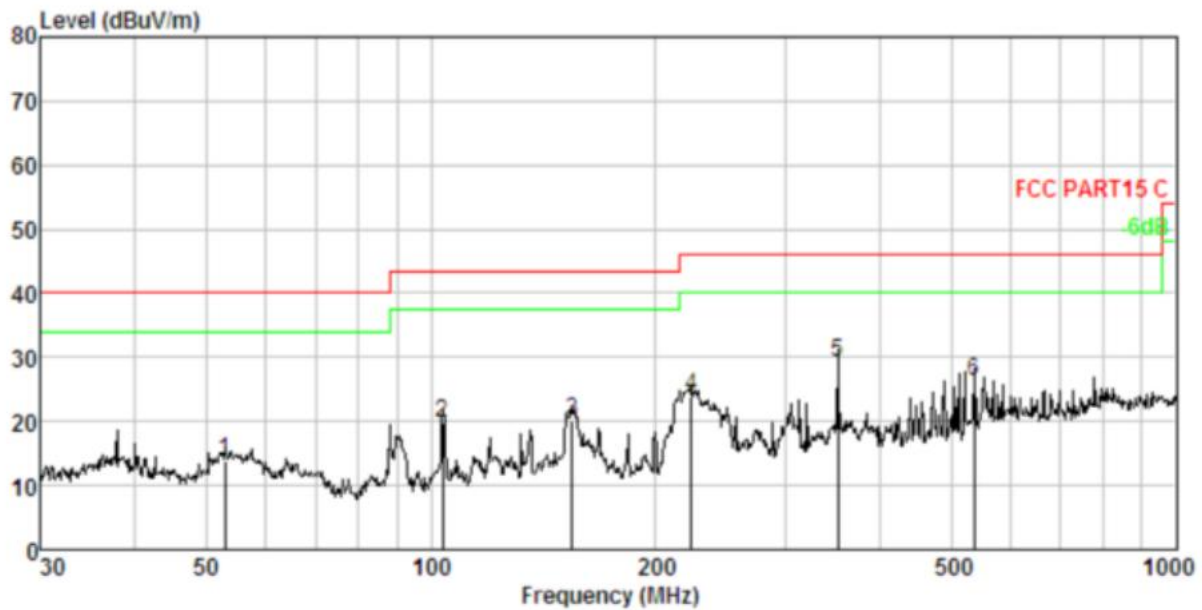




**Vertical:**

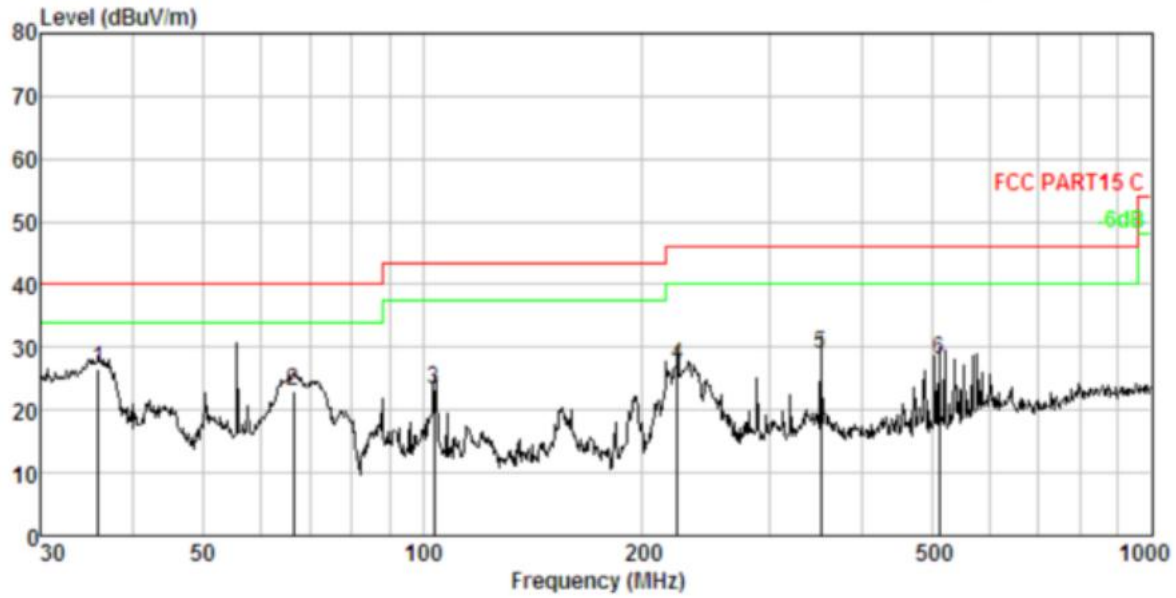

| No. | Freq<br>MHz | Cable<br>Loss<br>dB | ANT<br>Factor<br>dB/m | Receiver<br>Reading<br>dBuV | Preamp<br>Factor<br>dB | Emission<br>Level<br>dBuV/m | Limit<br>dBuV/m | Over<br>Limit<br>dB | Remark |
|-----|-------------|---------------------|-----------------------|-----------------------------|------------------------|-----------------------------|-----------------|---------------------|--------|
| 1.  | 35.875      | 1.22                | 13.44                 | 41.87                       | 30.03                  | 26.50                       | 40.00           | -13.50              | QP     |
| 2.  | 66.499      | 1.78                | 11.27                 | 40.09                       | 30.25                  | 22.89                       | 40.00           | -17.11              | QP     |
| 3.  | 103.806     | 2.18                | 10.57                 | 40.93                       | 30.40                  | 23.28                       | 43.50           | -20.22              | QP     |
| 4.  | 223.733     | 2.87                | 10.94                 | 44.07                       | 30.67                  | 27.21                       | 46.00           | -18.79              | QP     |
| 5.  | 351.708     | 3.28                | 14.27                 | 42.31                       | 30.83                  | 29.03                       | 46.00           | -16.97              | QP     |
| 6.  | 511.835     | 3.62                | 17.22                 | 38.21                       | 30.96                  | 28.09                       | 46.00           | -17.91              | QP     |

## 8 20dB Bandwidth

### 8.1 Block Diagram of Test Setup

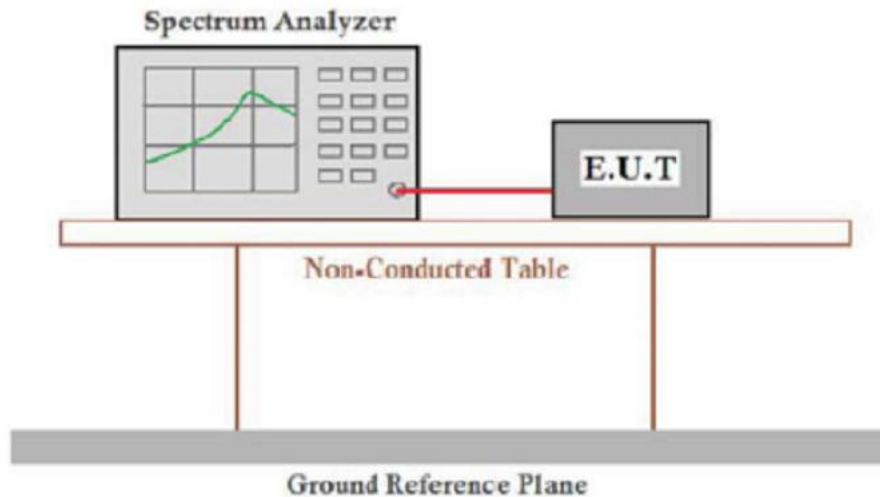

### 8.2 Rules and specifications

DFR 47 Part 15.215(c)

ANSI C63.10-2013

### 8.3 Test Procedure

Intentional radiator operating under the alternative provisions to the general emission limits, as contained in 15.217 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

### 8.4 Result

Pass.



Report No.: PTC22021500401E-FC01




## 9 TEST PHOTOS

Conducted Emissions




Radiated Spurious Emissions  
Test Frequency From 9KHz-30MHz

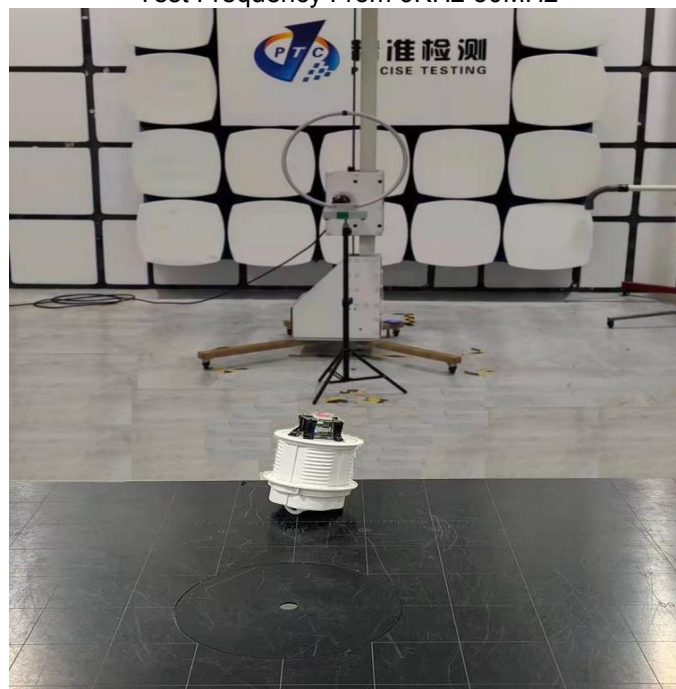



Test frequency from 30MHz-1000MHz

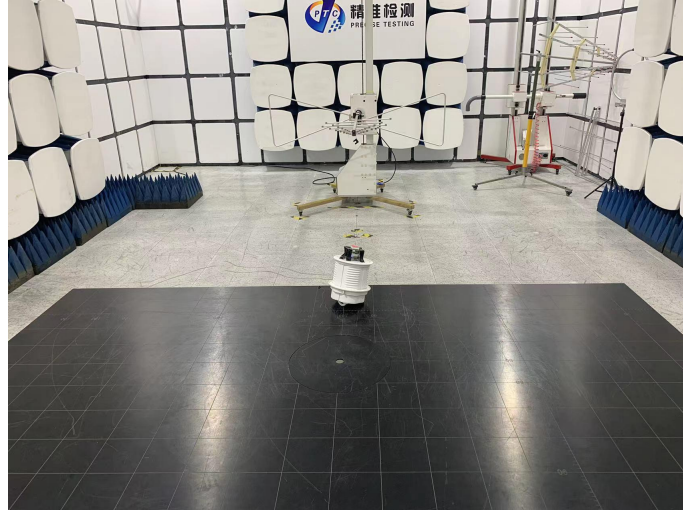



Report No.: PTC22021500401E-FC01

## 10 EUT PHOTOS

Please reference" EUT photos"

\*\*\*\*\*THE END REPORT\*\*\*\*\*