



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **GT-S5233T**
FCC ID(Requested) : **A3LGTS5233T**
Report No : **FG-236-R1**
Job No : **FG-236**
Date issued : **September 21, 2009**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.).....	16
6.4. GSM850 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement.....	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph.....	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph.....	25
7. CONCLUSION.....	27
8. TEST PLOTS.....	28

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS5233T
- Model : GT-S5233T
- Quantity : Quantity production is planned
- Emission Designators : 248KGXW(GSM850), 240KG7W(GSM850 EDGE)
246KGXW(GSM1900), 238KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.681 W ERP GSM850 (28.33 dBm)
0.622 W EIRP GSM1900 (27.94 dBm)
0.239 W ERP GSM850 EDGE(23.78 dBm)
0.321 W EIRP GSM1900 EDGE(25.07 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : September 10-11, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-236-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

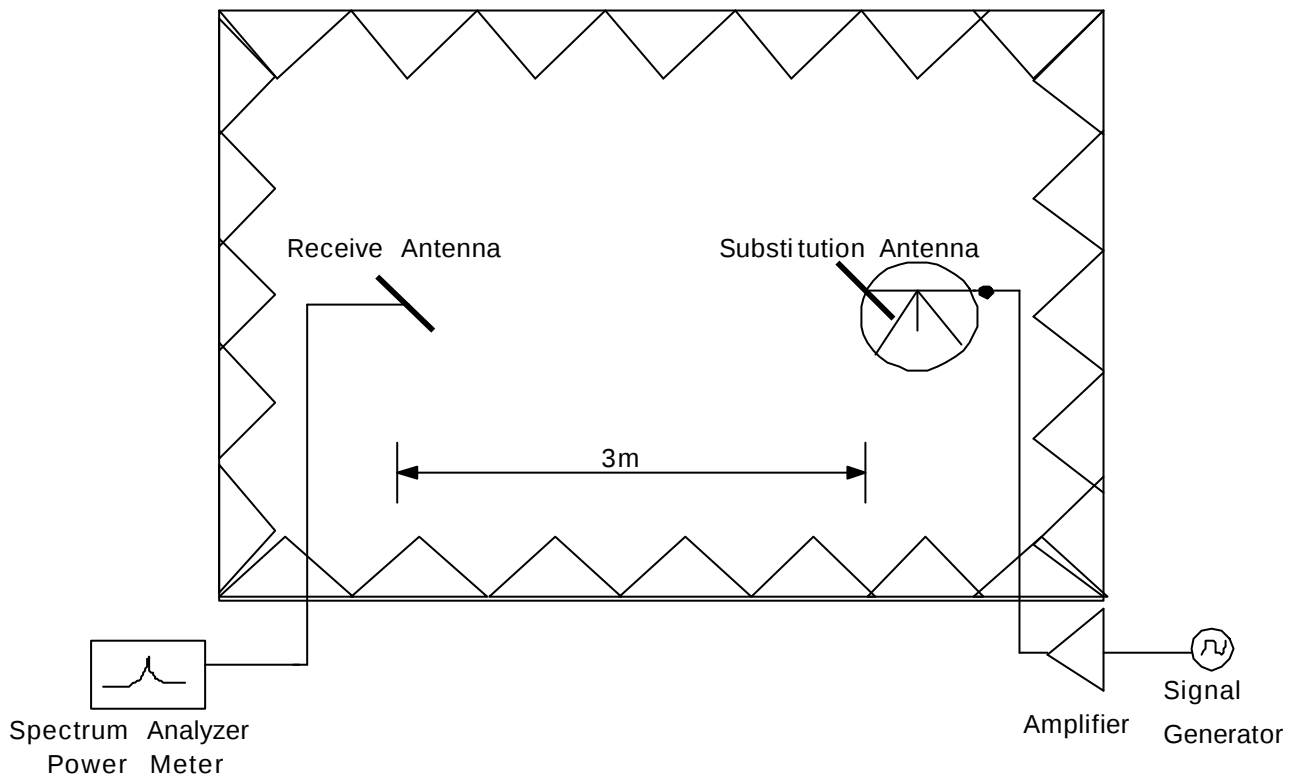


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

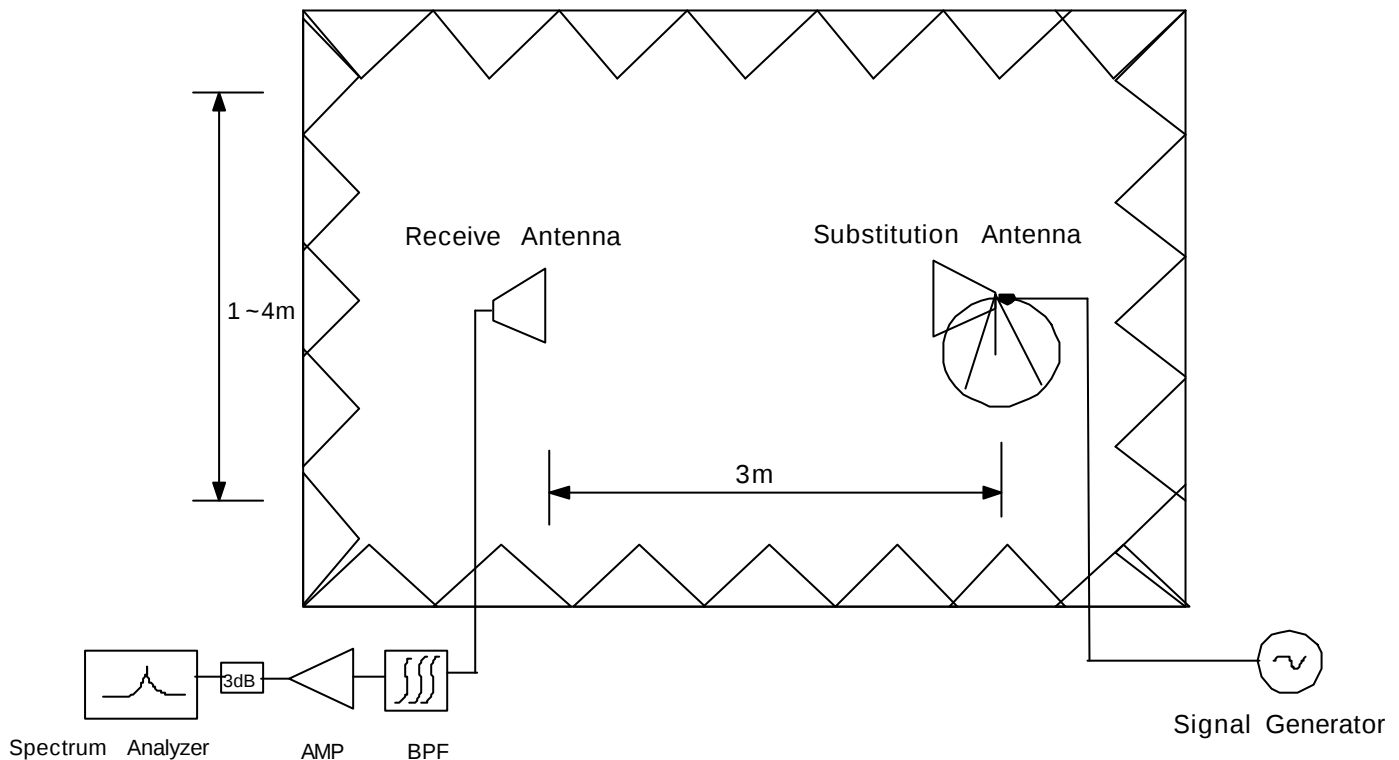


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.681 \text{ W}) = 41.33 \text{ dB}$$

$$28.33 \text{ dBm} - 41.33 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS Phone with Bluetooth FCC ID: A3LGTS5233T. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.48	29.61	29.63	26.12	26.12
	661	29.45	29.55	29.55	26.05	26.05
	810	29.69	29.78	29.78	26.31	26.31
Cellular	128	32.64	32.67	32.67	29.10	29.10
	190	32.50	32.50	32.49	28.93	28.94
	251	32.46	32.46	32.46	28.89	28.90

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	28.00	H	-8.44	-0.67	-7.77
		V	-8.65	-0.67	-7.98
836.60	28.00	H	-9.90	-0.73	-9.17
		V	-9.42	-0.73	-8.69
848.80	28.00	H	-12.55	-0.79	-11.76
		V	-11.22	-0.79	-10.43

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-7.44	H	283/90	28.33	0.681	Standard
836.60	-9.60	H	282/55	27.57	0.571	Standard
848.80	-12.22	H	281/45	27.54	0.568	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-12.01	H	283/90	23.78	0.239	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	28.00	H	-10.74	9.70	-20.44
		V	-10.38	9.70	-20.08
1880.00	28.00	H	-11.11	9.70	-20.81
		V	-11.11	9.70	-20.81
1909.80	27.00	H	-12.11	9.70	-21.81
		V	-11.80	9.70	-21.50

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-20.50	H	107/180	27.94	0.622	Standard
1880.00	-21.14	V	315/90	27.67	0.585	Standard
1909.80	-21.38	V	211/90	27.12	0.515	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-23.37	H	107/180	25.07	0.321	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 28.33 dBm = 0.681 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 41.33 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-54.65	V	71.02
	3	2472.60	-57.39	H	69.16
	4	3296.80	-66.08	H	74.59
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-57.12	V	71.96
	3	2509.80	-55.21	H	66.99
	4	3346.40	-66.79	H	74.67
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-55.27	V	70.99
	3	2546.40	-55.39	H	67.28
	4	3395.20	-66.59	H	74.89
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 27.94 dBm = 0.622 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 40.94 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-67.68	H	71.68
	3	5550.60	-65.37	V	63.51
	4	7400.80	-67.17	V	61.15
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-66.68	H	70.54
	3	5640.00	-66.93	H	65.00
	4	7520.00	-67.97	H	61.79
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-66.99	V	69.25
	3	5729.40	-66.80	V	64.25
	4	7639.20	-68.68	V	62.18
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 09. 11

Test Engineer : KJ KWON

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= ERP+2.14 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-55.49	-54.65	71.72	71.02
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-57.39	-60.79	69.16	72.81
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-66.08	-66.76	74.59	74.80
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-57.30	-57.12	73.03	71.96
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-55.21	-57.88	66.99	69.71
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-66.79	-66.80	74.80	74.67
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-57.02	-55.27	72.54	70.99
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-55.39	-57.42	67.28	67.95
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-66.59	-67.01	74.89	75.02
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 09. 11

Test Engineer : KJ KWON

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-67.68	-67.95	71.68	72.32
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-65.63	-65.37	63.89	63.51
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-67.69	-67.17	61.30	61.15
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-66.68	-67.25	70.54	71.14
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-66.93	-67.14	65.14	65.00
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-67.97	-68.11	61.79	62.10
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-67.09	-66.99	70.01	69.25
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-67.26	-66.80	64.72	64.25
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-68.74	-68.68	62.39	62.18
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-69.02	-69.09	57.36	57.95
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-68.43	-68.03	53.11	52.74
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-68.82	-68.66	49.32	49.76

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-49.40	836,599,951	-0.000006	-0.059
100%		-30	-40.60	836,599,959	-0.000005	-0.049
100%		-20	-6.10	836,599,994	-0.000001	-0.007
100%		-10	-24.80	836,599,975	-0.000003	-0.030
100%		0	34.30	836,600,034	0.000004	0.041
100%		+10	-36.80	836,599,963	-0.000004	-0.044
100%		+20	-49.40	836,599,951	-0.000006	-0.059
100%		+30	23.40	836,600,023	0.000003	0.028
100%		+40	-21.00	836,599,979	-0.000003	-0.025
100%		+50	-13.30	836,599,987	-0.000002	-0.016
100%		+60	8.40	836,600,008	0.000001	0.010
85%	3.35	+20	-15.00	836,599,985	-0.000002	-0.018
115%	4.26	+20	5.30	836,600,005	0.000001	0.006
Batt.Endpoint	3.35	+20	-15.00	836,599,985	-0.000002	-0.018


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

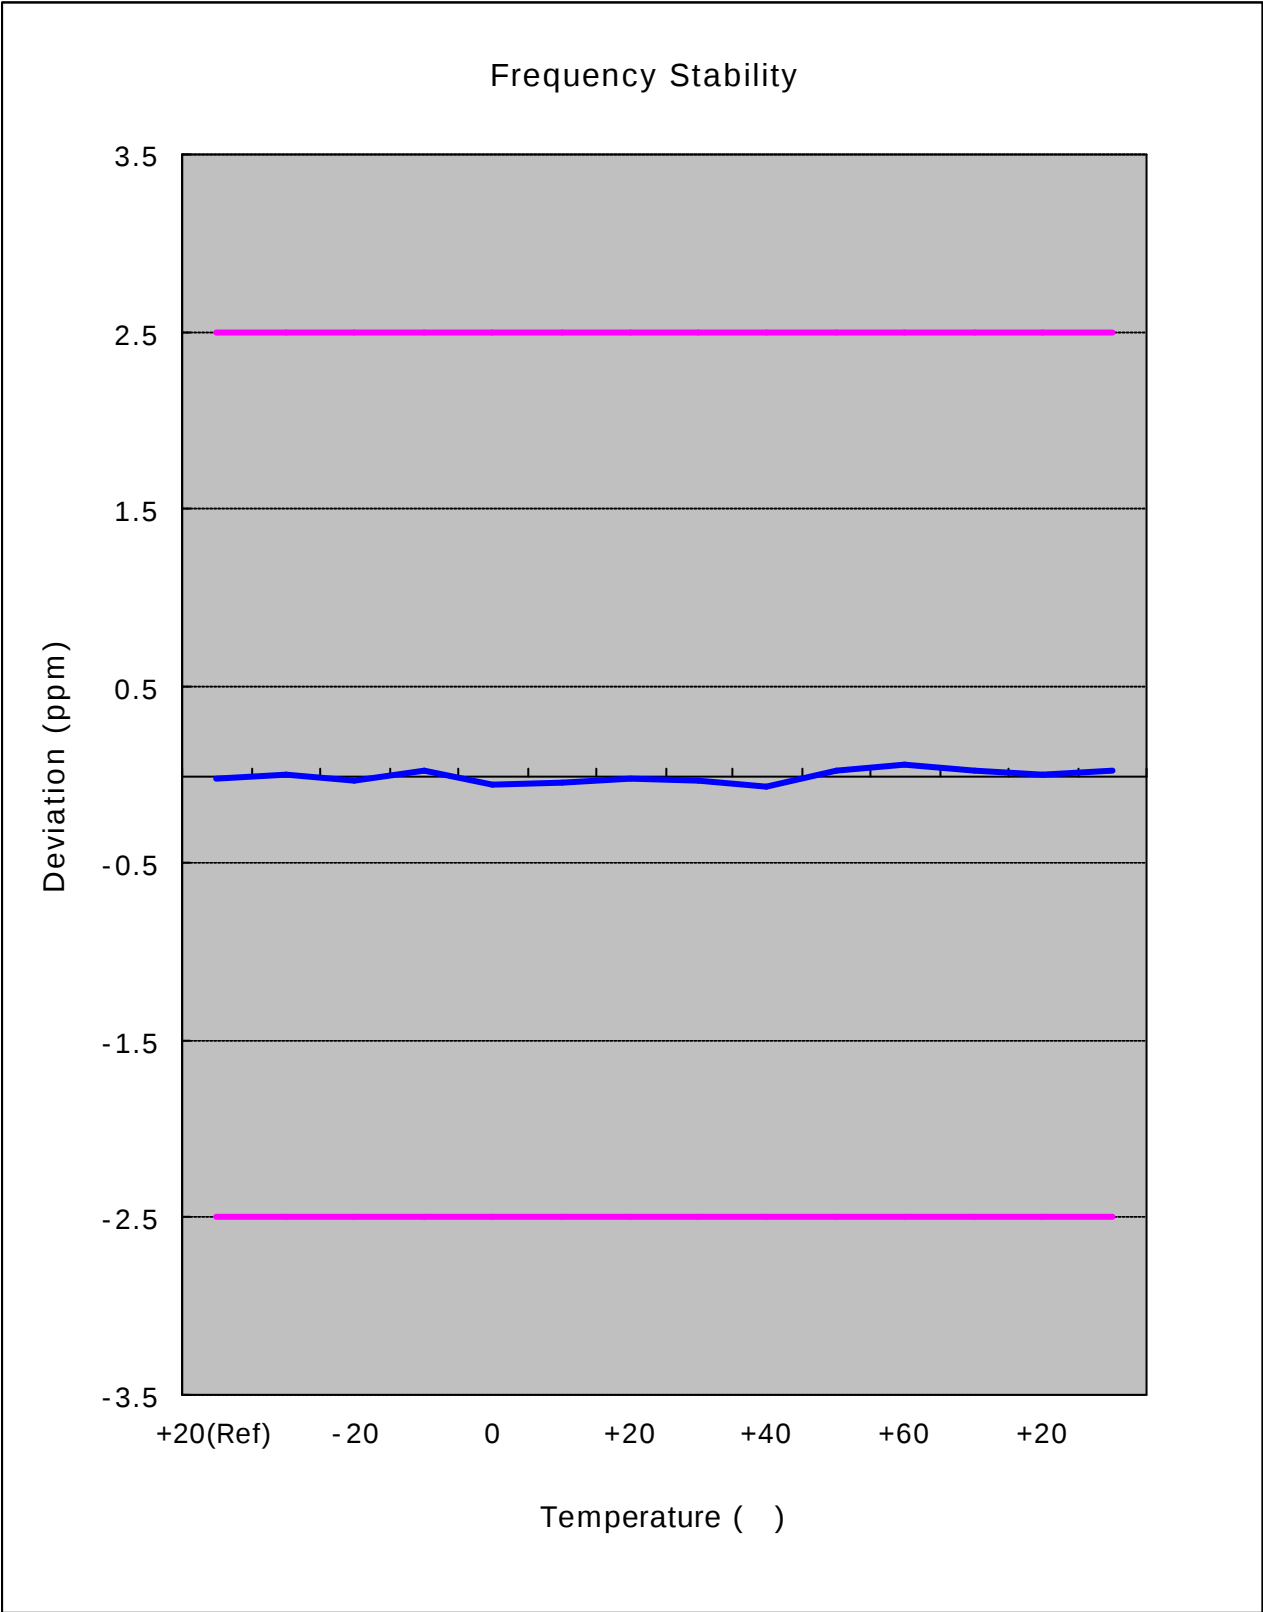

Zoom IN

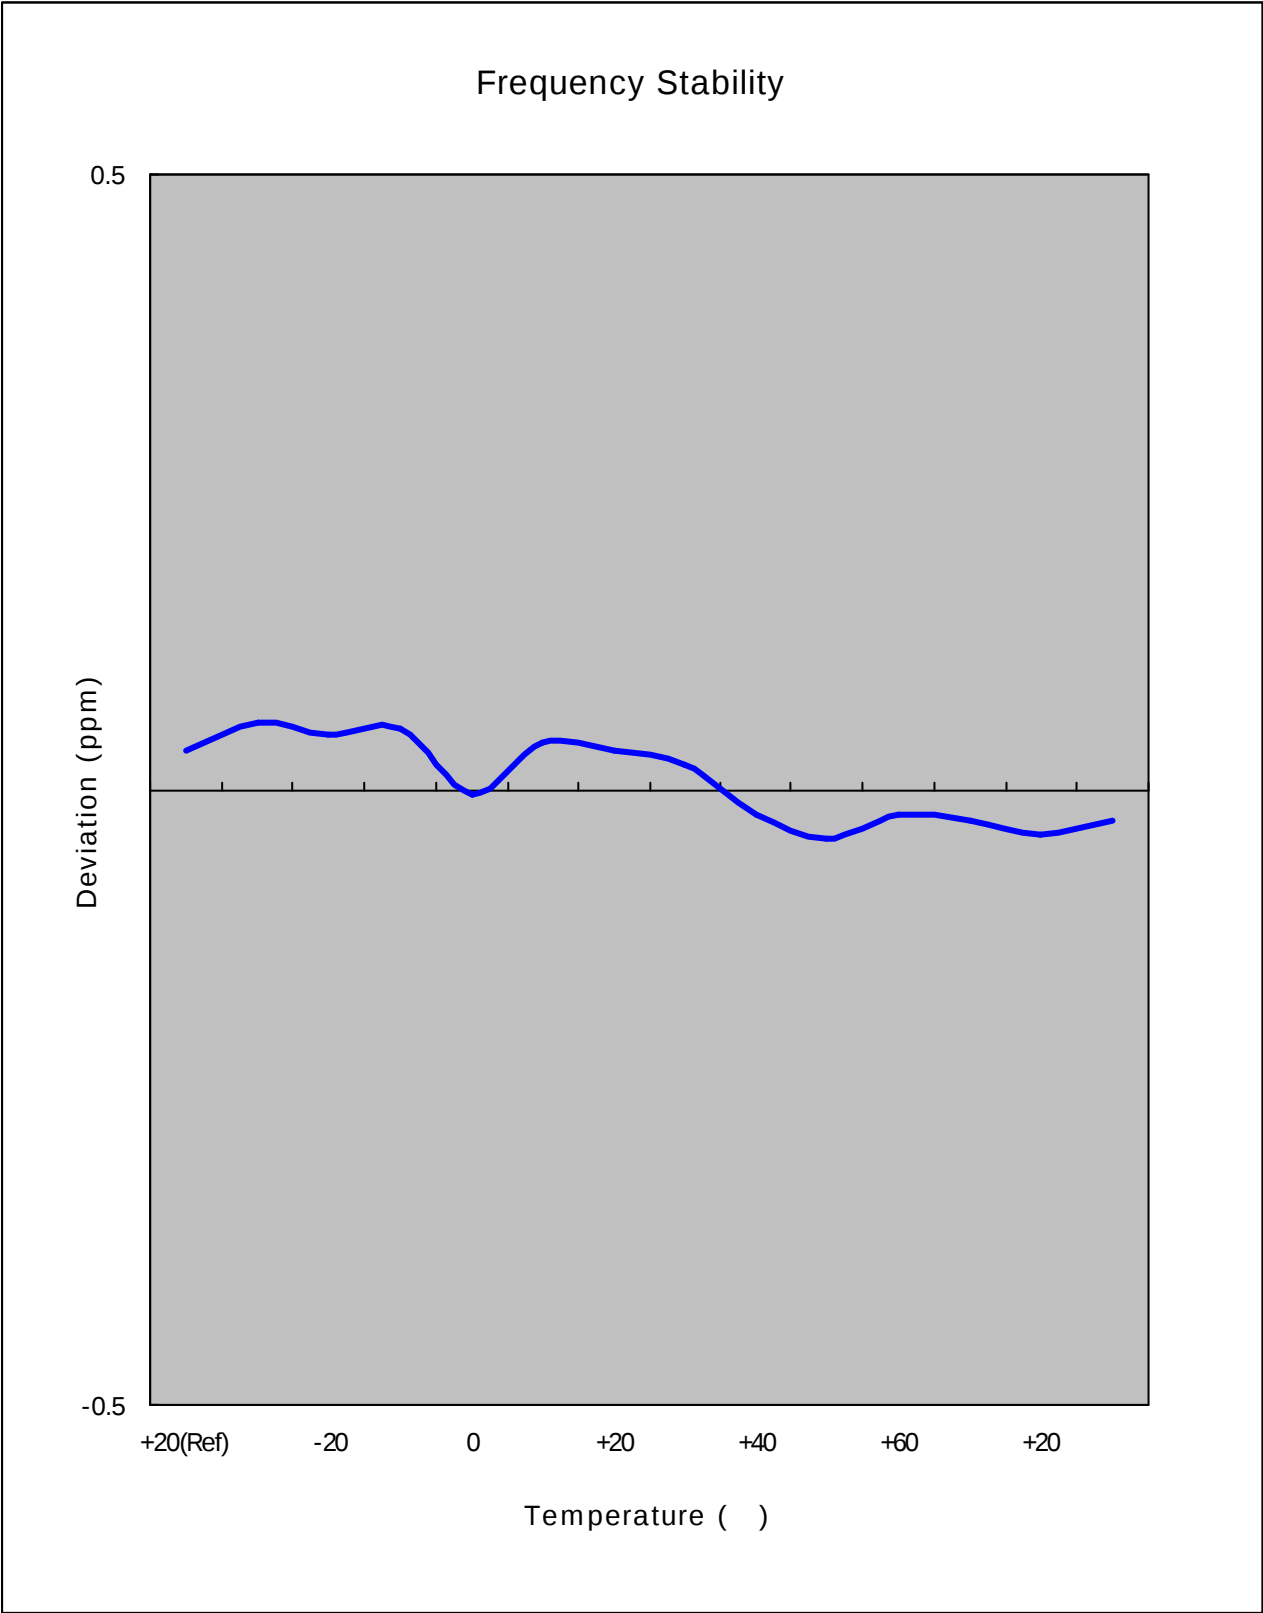

6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : $\pm 0.00025\%$ or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	43.70	1,880,000,044	0.000002	0.023
100%		-30	-12.10	1,879,999,988	-0.000001	-0.006
100%		-20	-2.40	1,879,999,998	0.000000	-0.001
100%		-10	-15.70	1,879,999,984	-0.000001	-0.008
100%		0	-8.90	1,879,999,991	0.000000	-0.005
100%		+10	7.00	1,880,000,007	0.000000	0.004
100%		+20	43.70	1,880,000,044	0.000002	0.023
100%		+30	32.90	1,880,000,033	0.000002	0.018
100%		+40	-46.50	1,879,999,954	-0.000002	-0.025
100%		+50	-42.50	1,879,999,958	-0.000002	-0.023
100%		+60	-10.40	1,879,999,990	-0.000001	-0.006
85%	3.35	+20	-26.90	1,879,999,973	-0.000001	-0.014
115%	4.26	+20	3.10	1,880,000,003	0.000000	0.002
Batt.Endpoint	3.35	+20	-26.90	1,879,999,973	-0.000001	-0.014


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

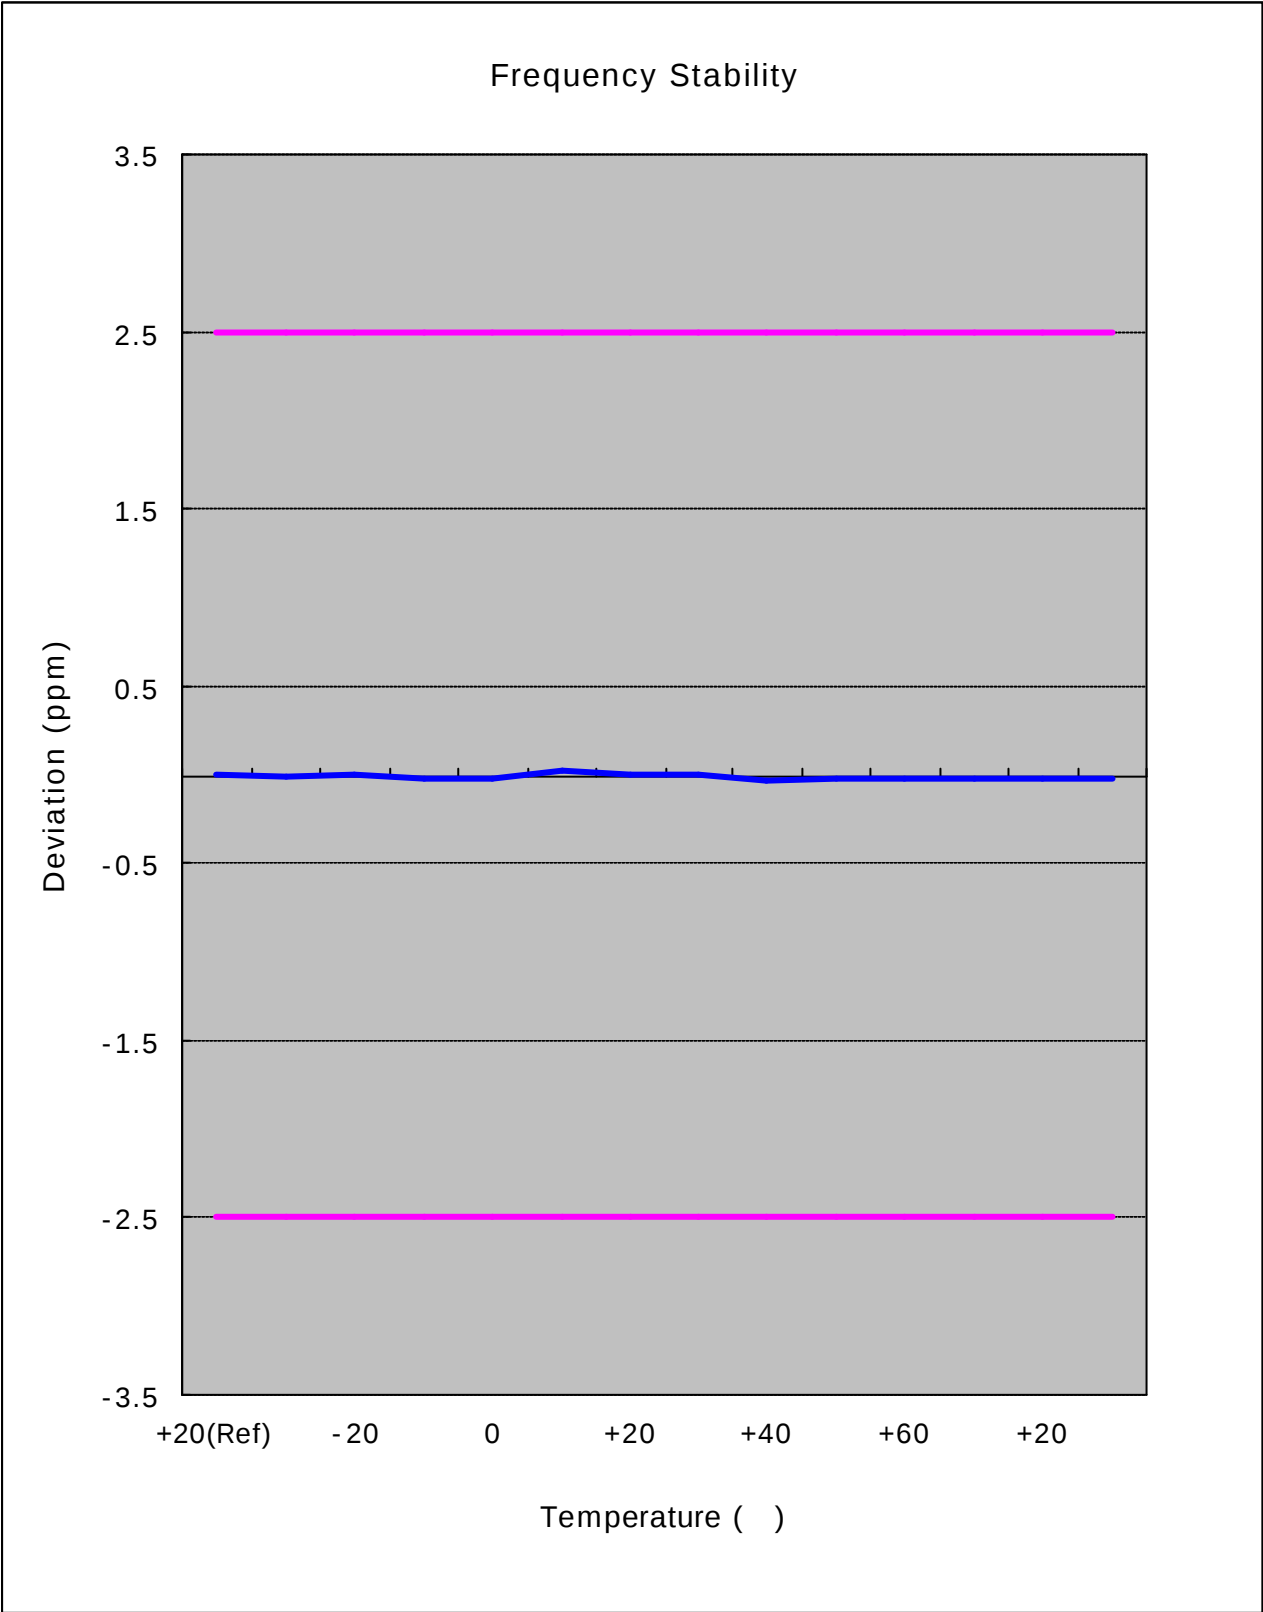

Zoom IN

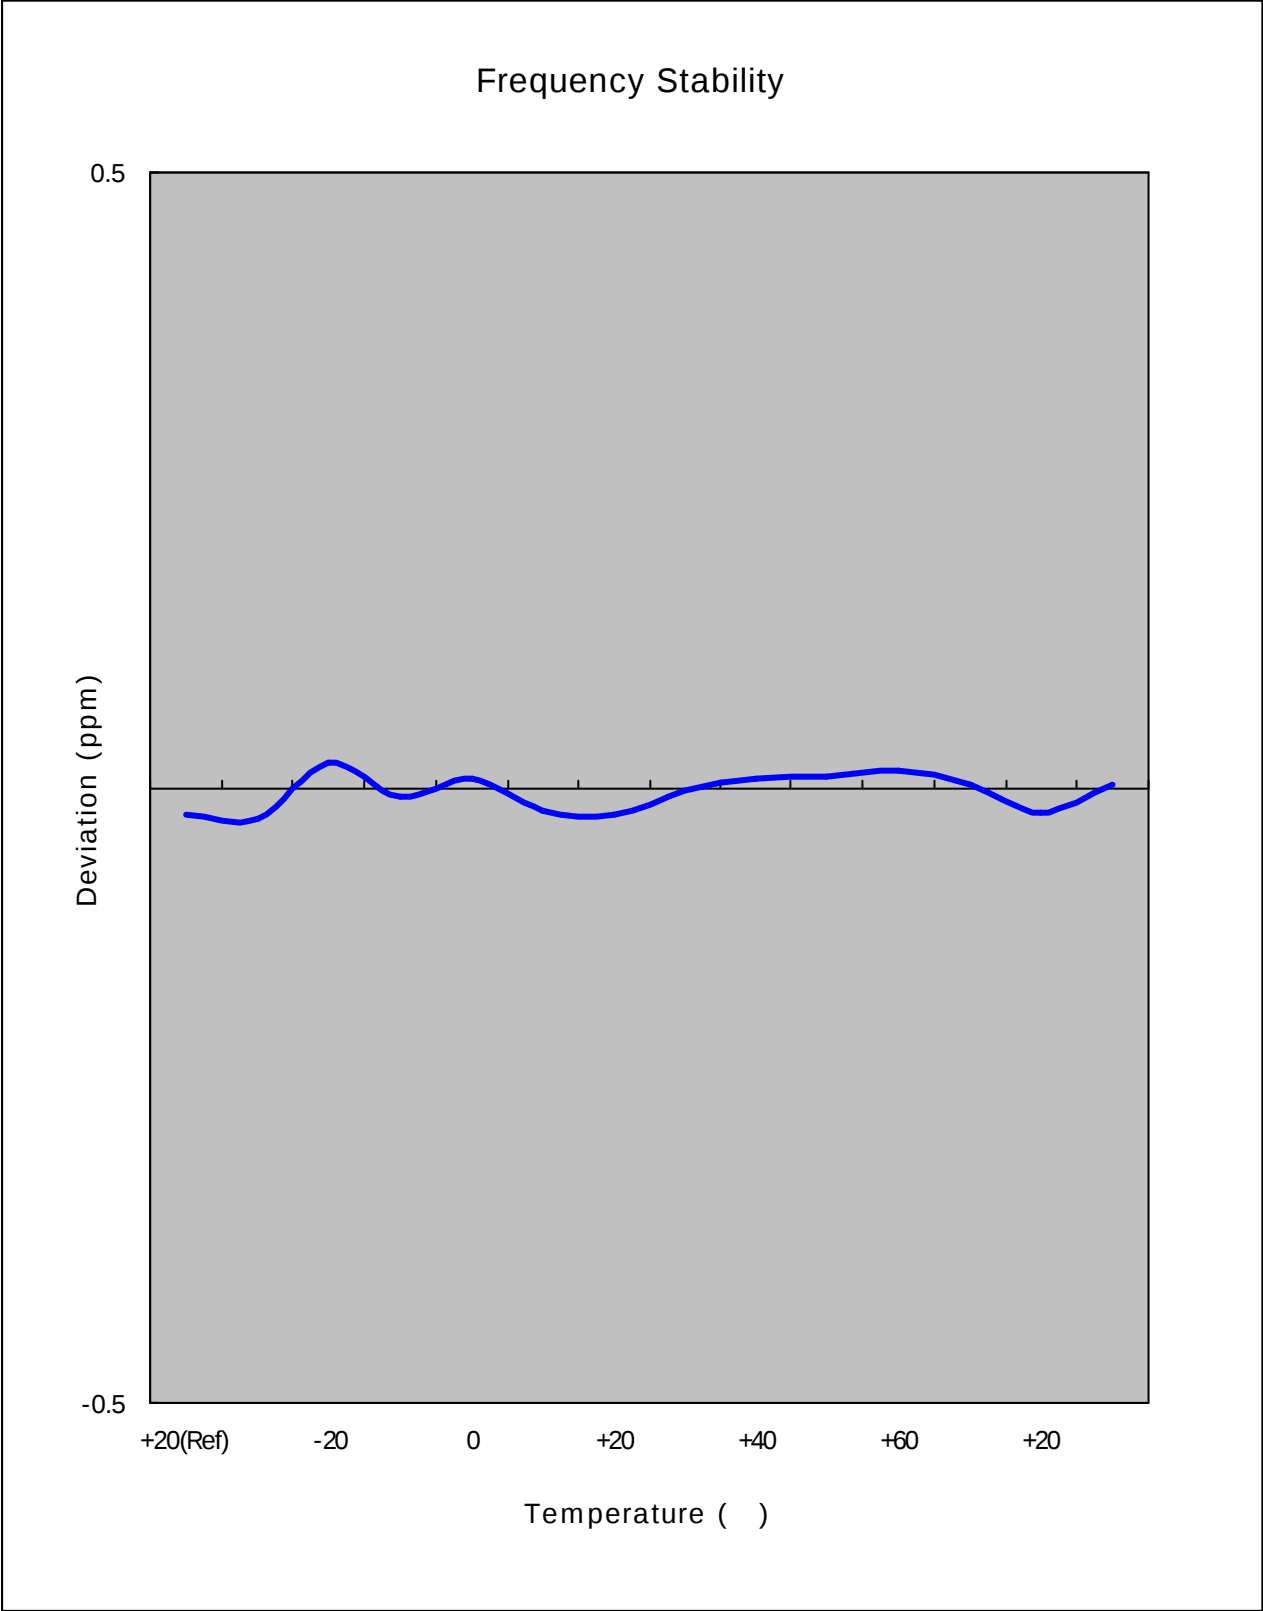



7. CONCLUSION


The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS Phone with Bluetooth. FCC ID : A3LGTS5233T complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850


 Agilent


R T

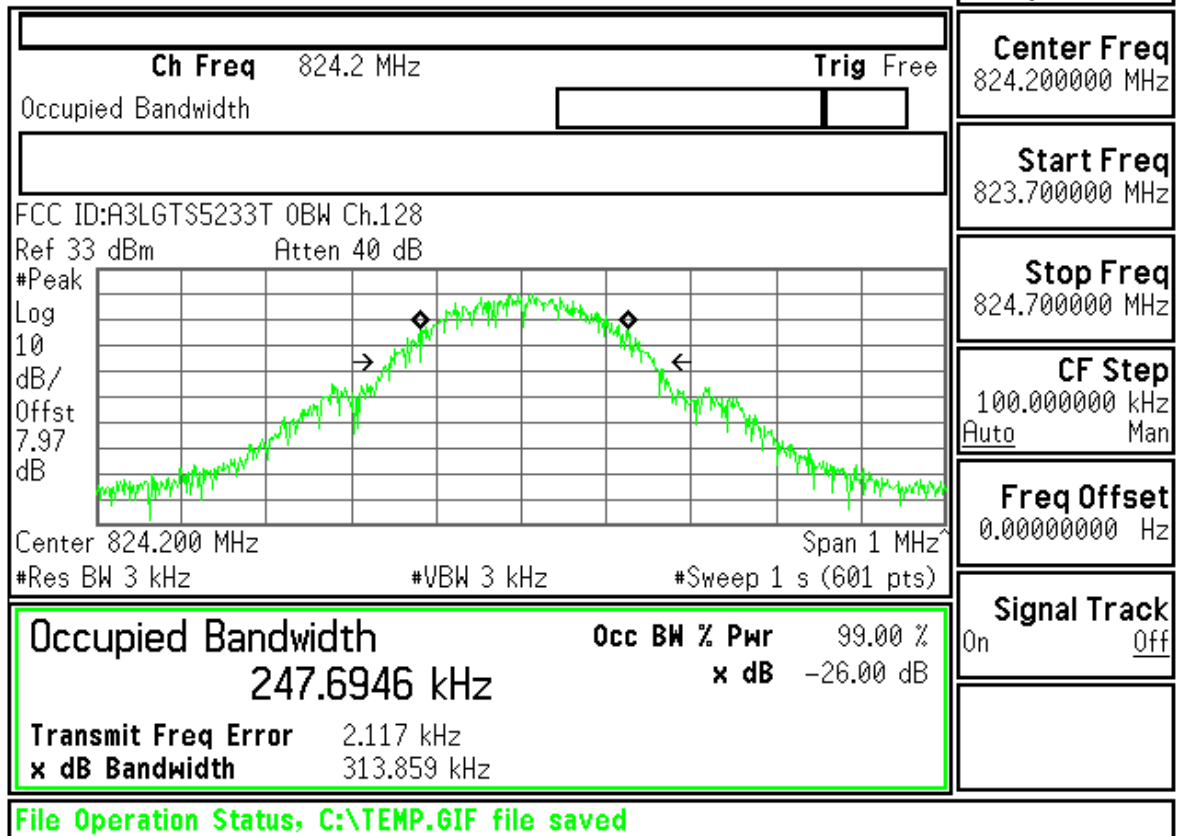

 Agilent

R T

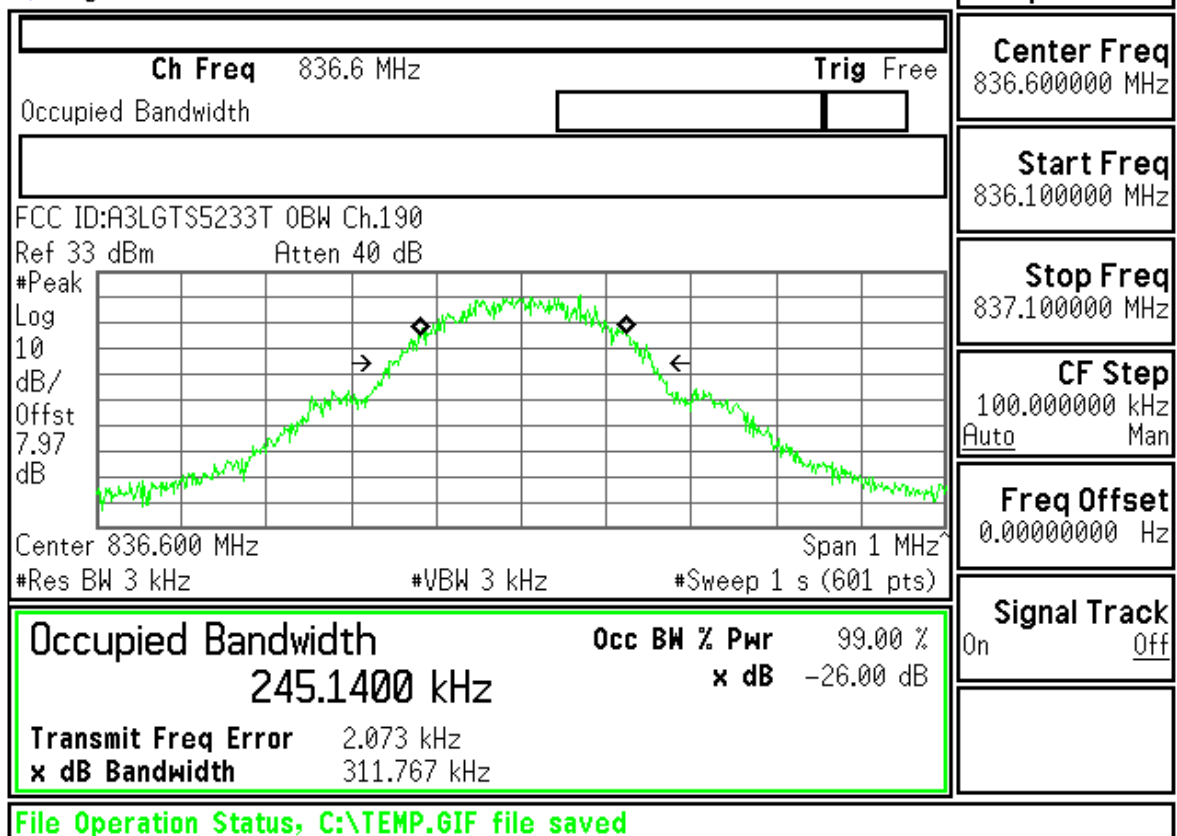

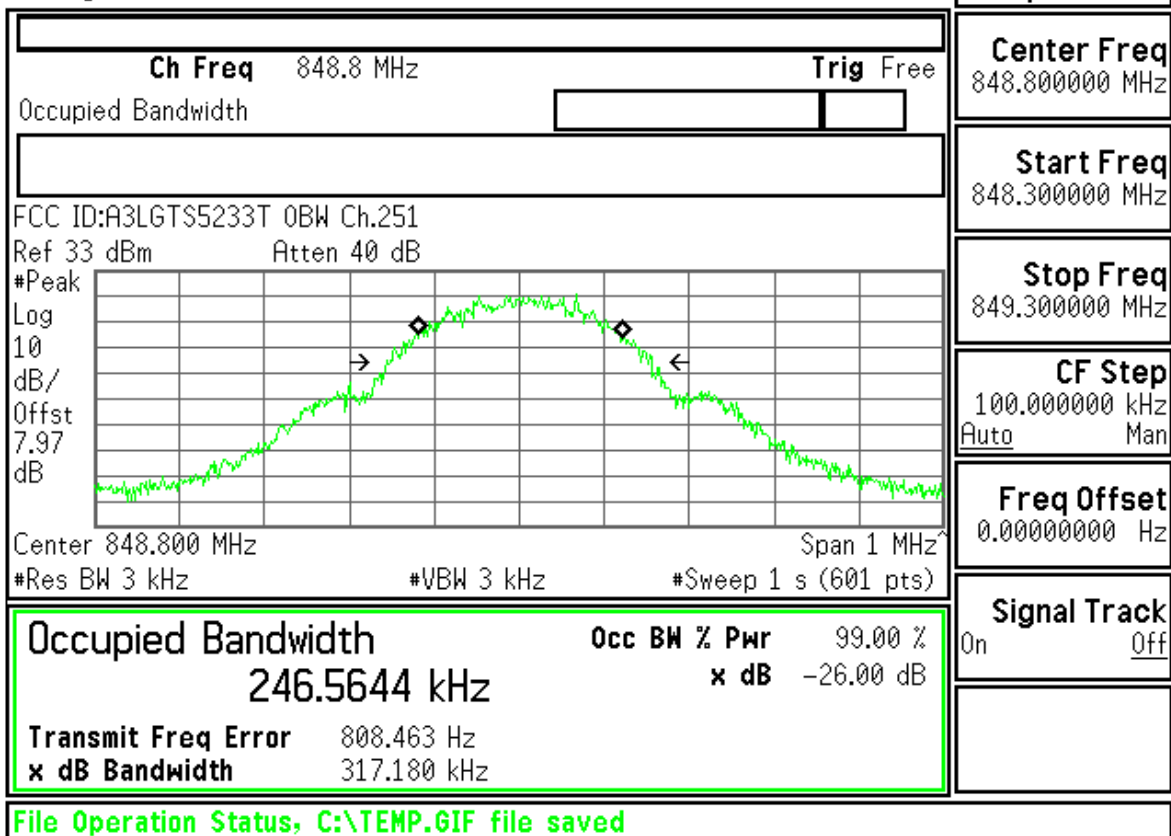

Control	Transmit Power								TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.64</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.64</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.64	----	----	----	Estimated Carrier Power	32.64	----	----	----	Downlink Traffic Power ▾						
									Burst 1	Burst 2	Burst 3	Burst 4																		
Burst Power									32.64	----	----	----																		
Estimated Carrier Power									32.64	----	----	----																		
Traffic Band																														
GS1850																														
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.68</td> <td>0.63</td> <td>11.25</td> </tr> <tr> <td>Maximum</td> <td>2.74</td> <td>0.82</td> <td>19.99</td> </tr> <tr> <td>Average</td> <td>2.18</td> <td>0.73</td> <td>15.05</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.68	0.63	11.25	Maximum	2.74	0.82	19.99	Average	2.18	0.73	15.05	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
										Peak Phase °	RMS Phase °	Frequency Hz																		
									Minimum	1.68	0.63	11.25																		
									Maximum	2.74	0.82	19.99																		
	Average	2.18	0.73	15.05																										
Pass/Fail	Pass	Pass	Pass																											
128																														
MS TX Level																														
5																														
Channel Mode Setup ▾																														
Return																														
1 of 2	50 / 50 Single Active Cell Connected Sys Type: GSM IntRef Offset R T Help								1 of 2																					

elp; CALL:ORIGinate

Control	Transmit Power								TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.50</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.50</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.50	----	----	----	Estimated Carrier Power	32.50	----	----	----	Downlink Traffic Power ▾						
									Burst 1	Burst 2	Burst 3	Burst 4																		
Burst Power									32.50	----	----	----																		
Estimated Carrier Power									32.50	----	----	----																		
Traffic Band																														
GS1850																														
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.79</td> <td>0.68</td> <td>0.23</td> </tr> <tr> <td>Maximum</td> <td>3.30</td> <td>0.87</td> <td>10.36</td> </tr> <tr> <td>Average</td> <td>2.37</td> <td>0.75</td> <td>3.97</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.79	0.68	0.23	Maximum	3.30	0.87	10.36	Average	2.37	0.75	3.97	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
										Peak Phase °	RMS Phase °	Frequency Hz																		
									Minimum	1.79	0.68	0.23																		
									Maximum	3.30	0.87	10.36																		
	Average	2.37	0.75	3.97																										
Pass/Fail	Pass	Pass	Pass																											
190																														
MS TX Level																														
5																														
Channel Mode Setup ▾																														
Return																														
1 of 2	50 / 50 Single Active Cell Connected Sys Type: GSM IntRef Offset R T Help								1 of 2																					



elp; CALL:ORIGinate


Control	Transmit Power								TCH Parms																									
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.46</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.46</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.46	----	----	----	Estimated Carrier Power	32.46	----	----	----	Downlink Traffic Power										
									Burst 1	Burst 2	Burst 3	Burst 4																						
Burst Power									32.46	----	----	----																						
Estimated Carrier Power									32.46	----	----	----																						
	Traffic Band																																	
	GS1850																																	
	Traffic Channel																																	
	251																																	
	MS TX Level																																	
	5																																	
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.01</td> <td>0.73</td> <td>0.15</td> </tr> <tr> <td>Maximum</td> <td>3.28</td> <td>1.03</td> <td>9.40</td> </tr> <tr> <td>Average</td> <td>2.56</td> <td>0.82</td> <td>5.59</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.01	0.73	0.15	Maximum	3.28	1.03	9.40	Average	2.56	0.82	5.59	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
Phase & Frequency Error																																		
									Peak Phase °	RMS Phase °	Frequency Hz																							
Minimum									2.01	0.73	0.15																							
Maximum	3.28	1.03	9.40																															
Average	2.56	0.82	5.59																															
Pass/Fail	Pass	Pass	Pass																															
	Return																																	
	1 of 2																																	
	50 / 50 Active Cell Connected Sys Type: GSM																																	
1 of 2				IntRef	Offset	R	T	Help		1 of 2																								



elp; CALL:ORIGinate



Control	Power vs Time Graph								TCH Parms																					
Power vs Time Setup	Ref 10.00 dBc 10.00 dB/ -50 us 500 us Pass Rise B1 Fall <table border="1"> <thead> <tr> <th>Burst</th> <th>TX Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.68</td> <td>GMSK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table> Continuous								Burst	TX Power (dBm)	Modulation	Mask	1	32.68	GMSK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Downlink Traffic Power	
Burst									TX Power (dBm)	Modulation	Mask																			
1									32.68	GMSK	ETSI																			
2									----	----	----																			
3	----	----	----																											
4	----	----	----																											
	Traffic Band																													
	GS1850																													
Change View	Traffic Channel																													
	128																													
	MS TX Level																													
	5																													
	Channel Mode Setup																													
	Return																													
	1 of 2																													
	Active Cell Connected Sys Type: GSM																													
1 of 2				IntRef	Offset	R	T	Help		1 of 2																				



elp; CALL:ORIGinate

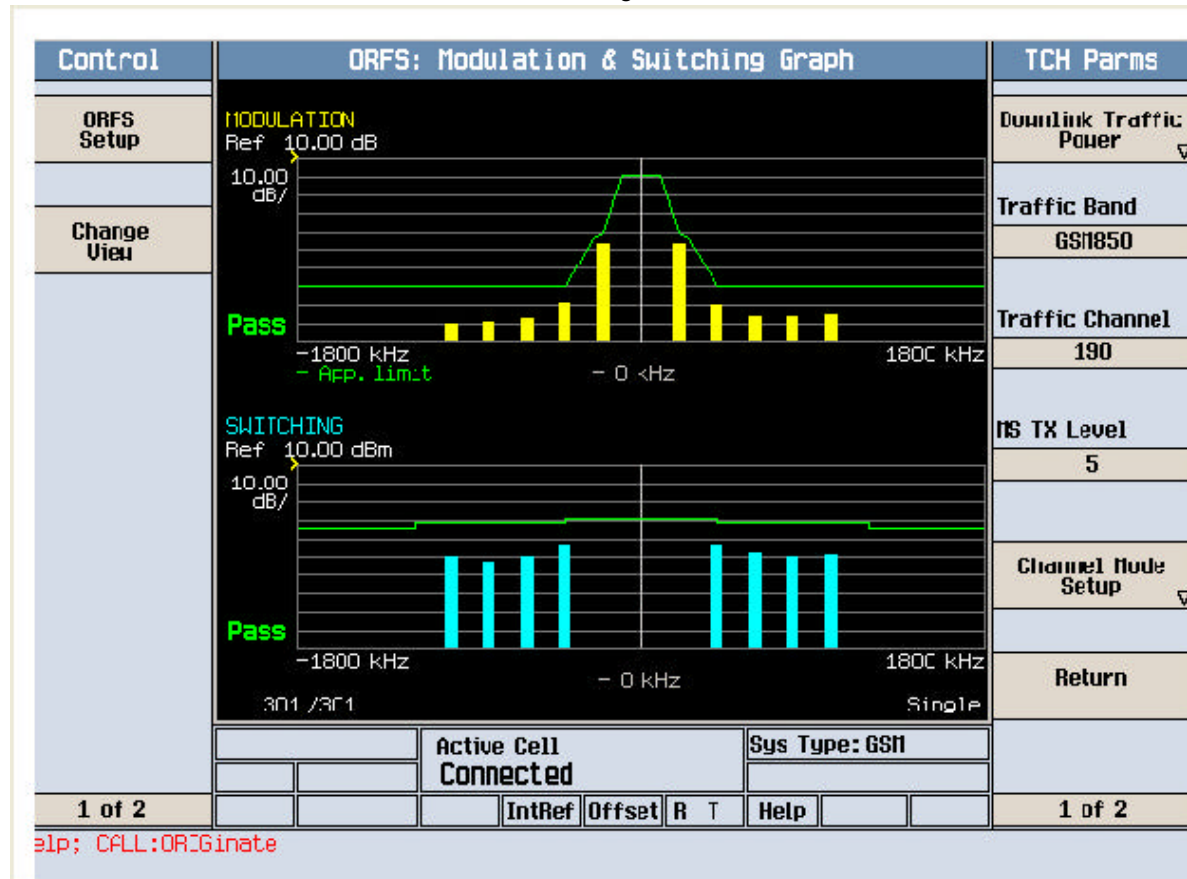
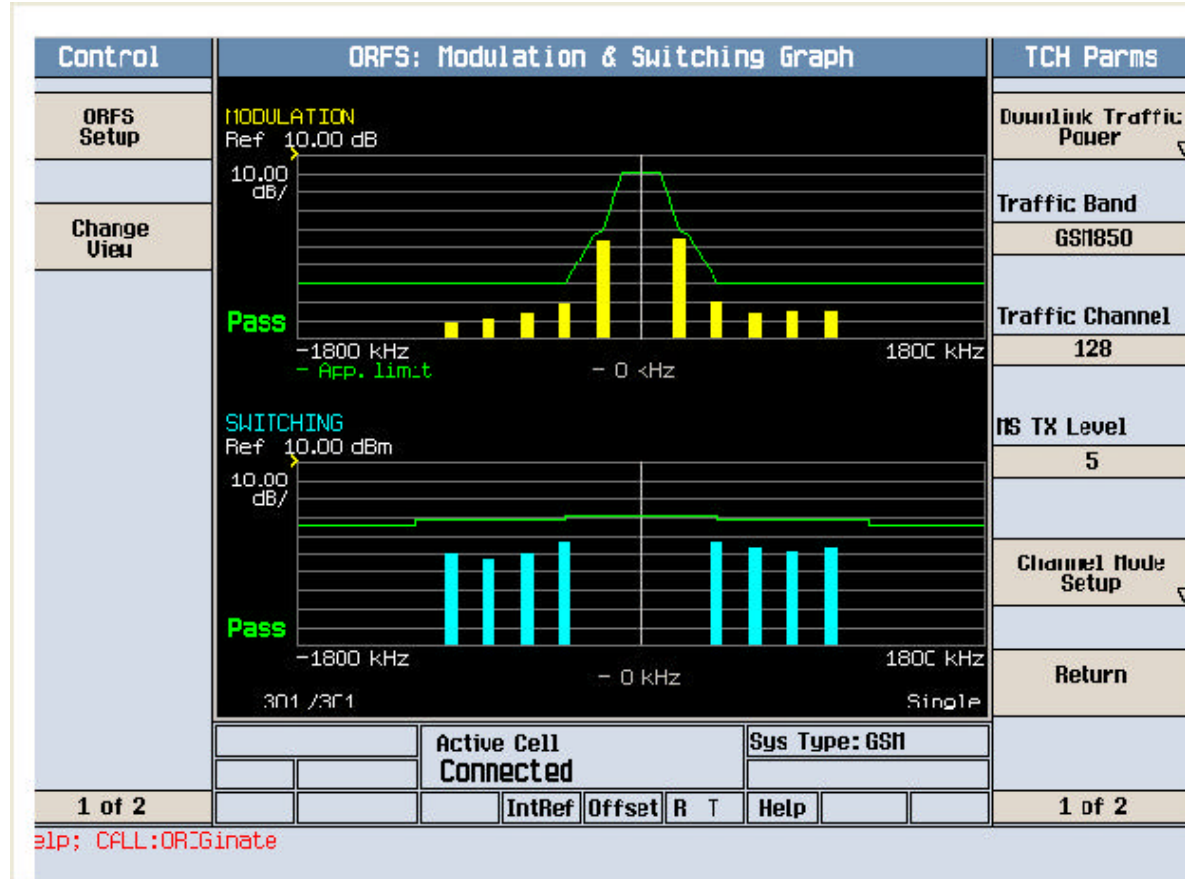



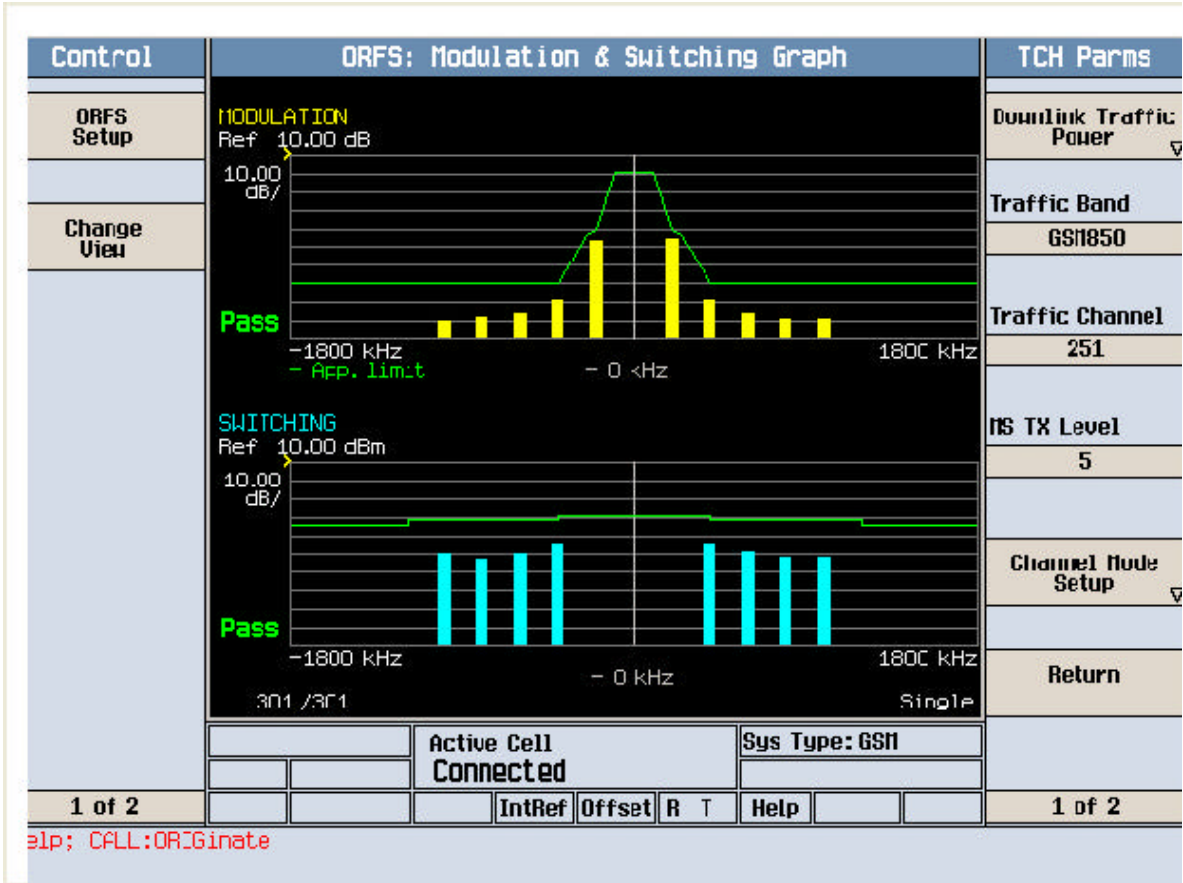


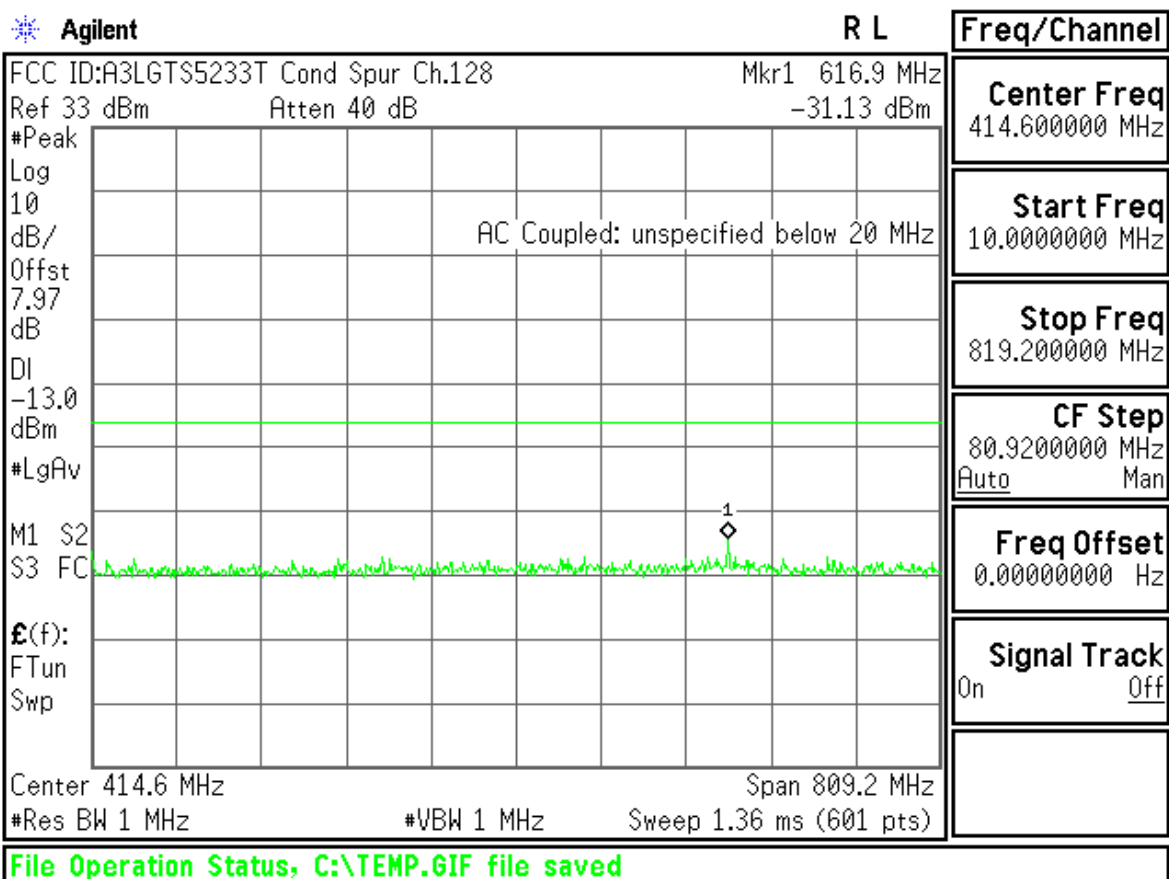
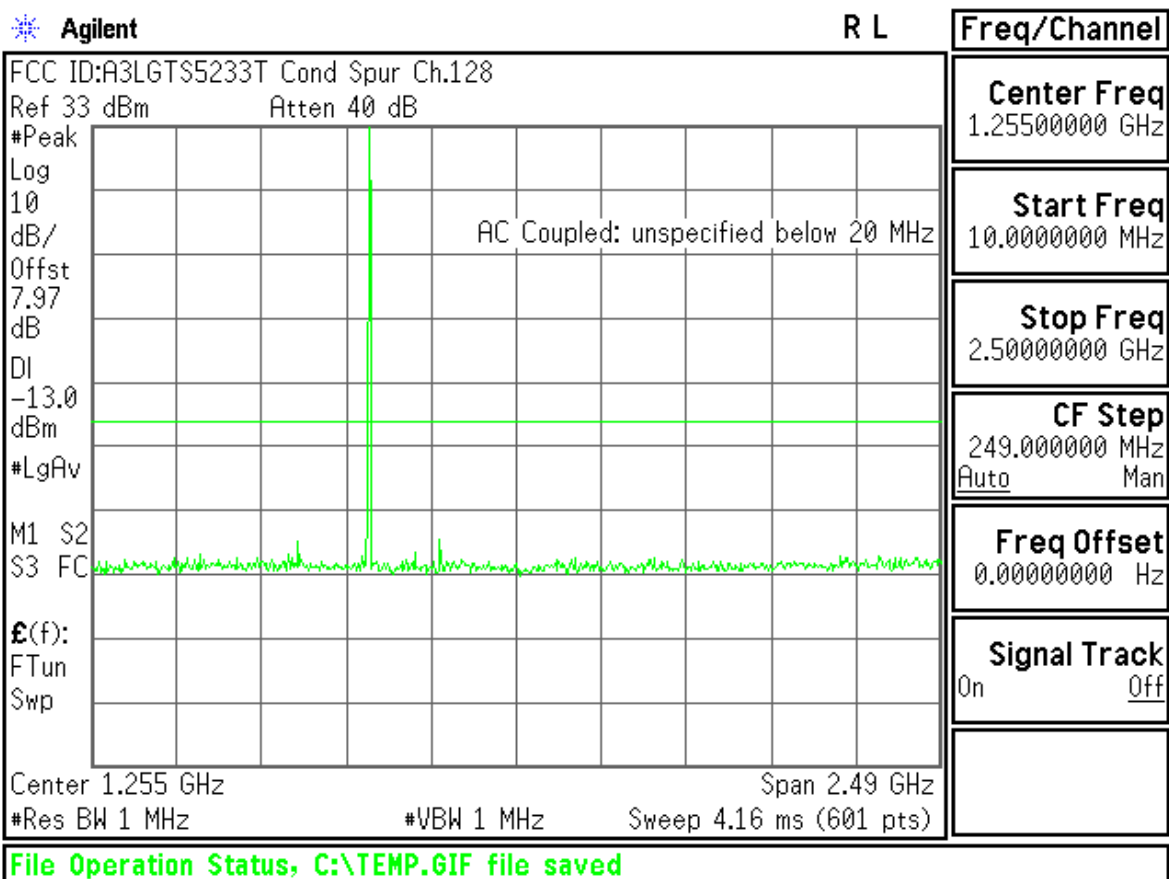


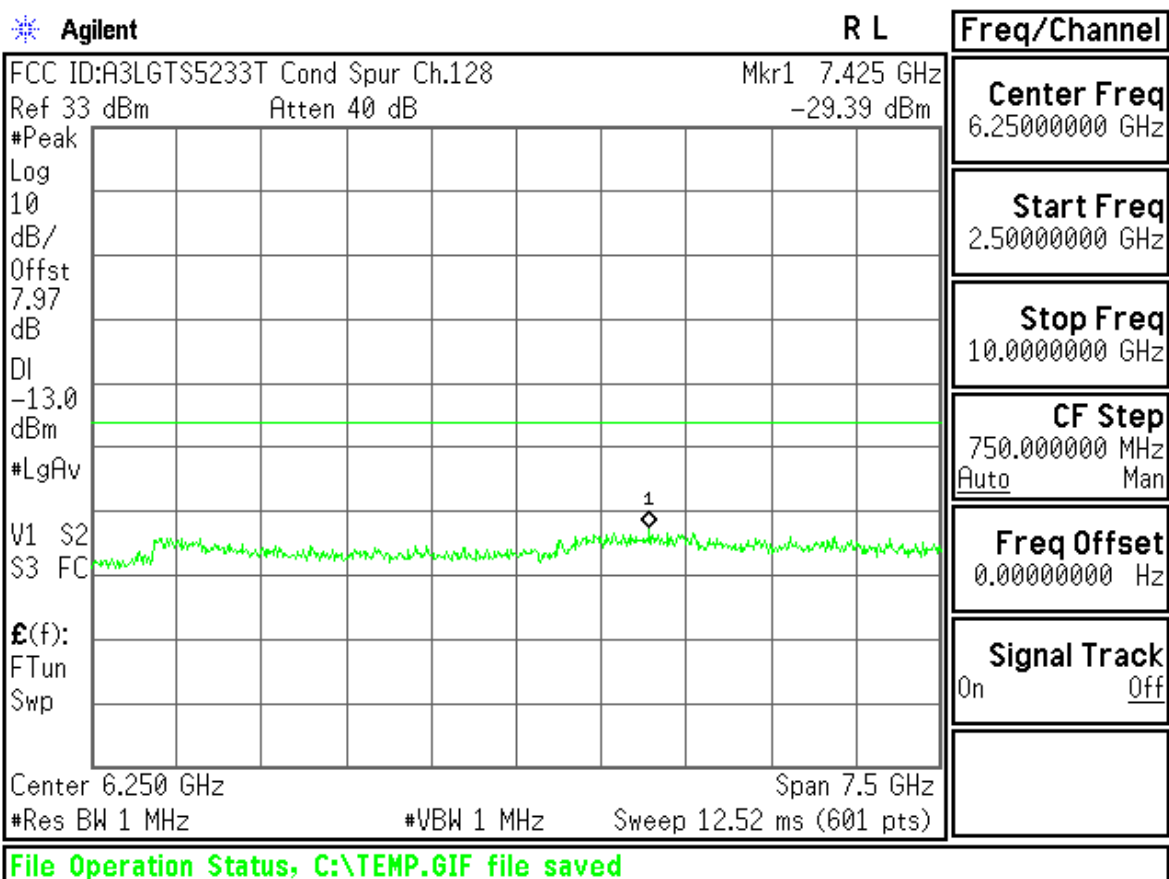
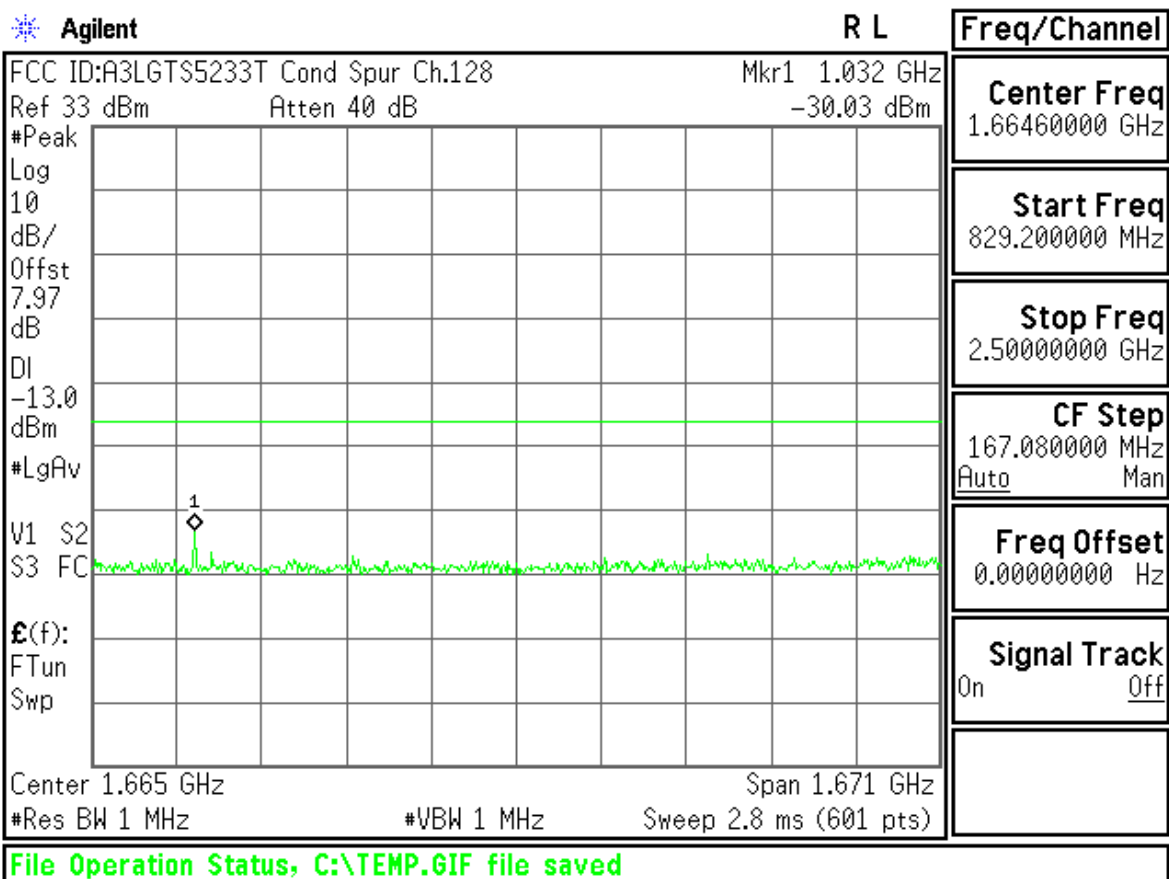


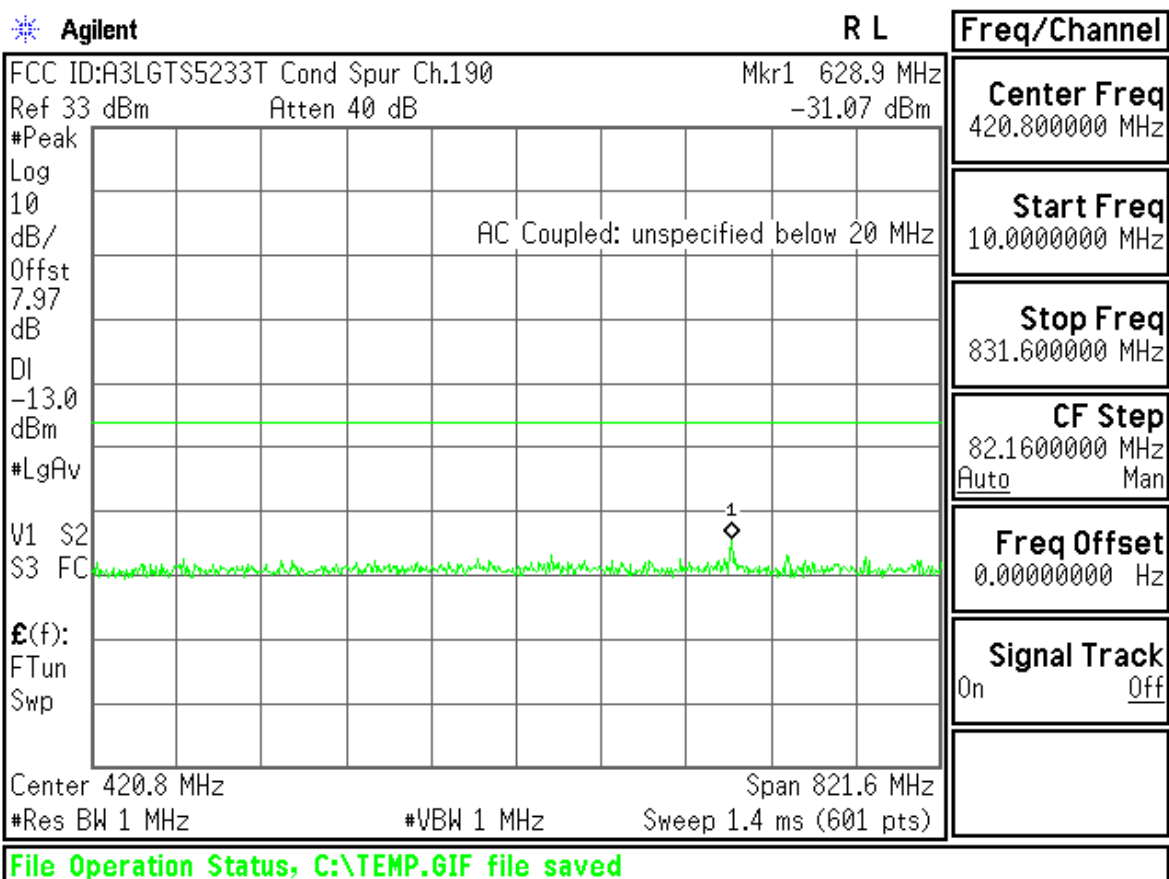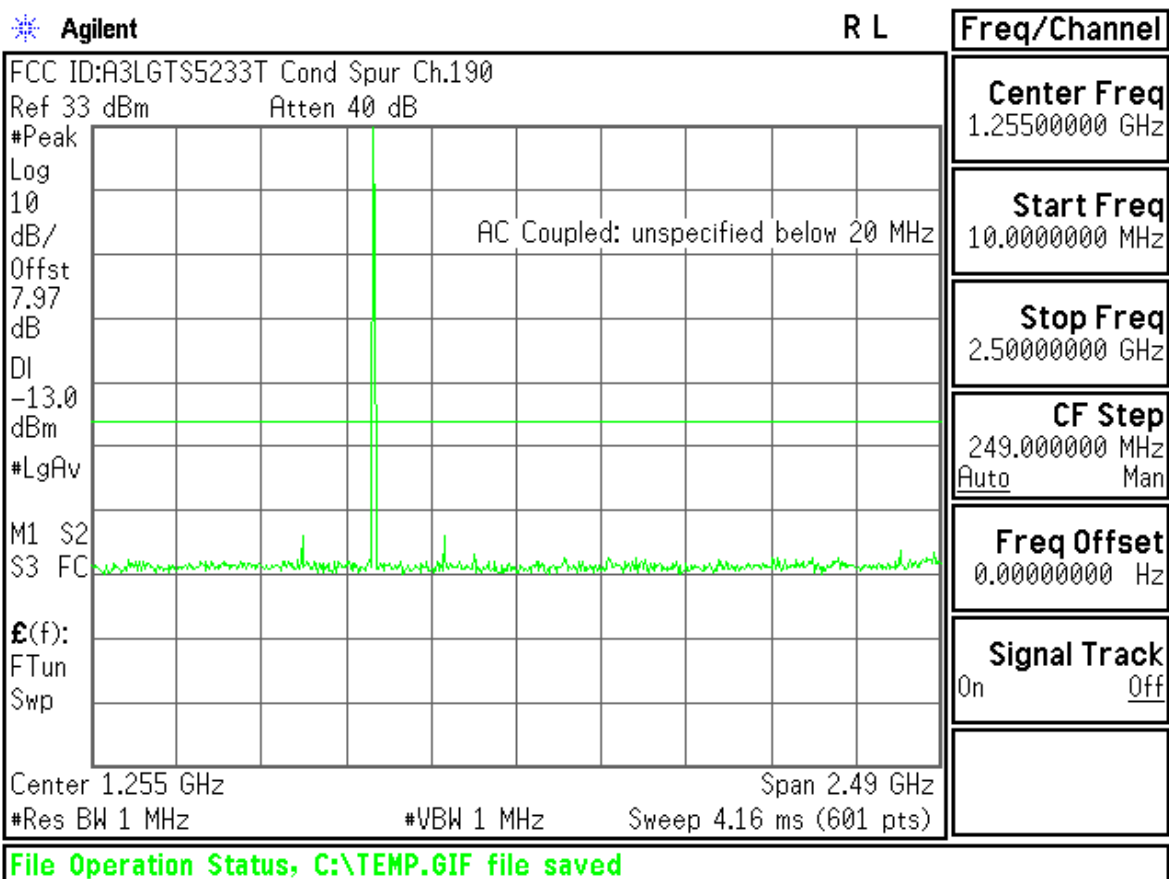

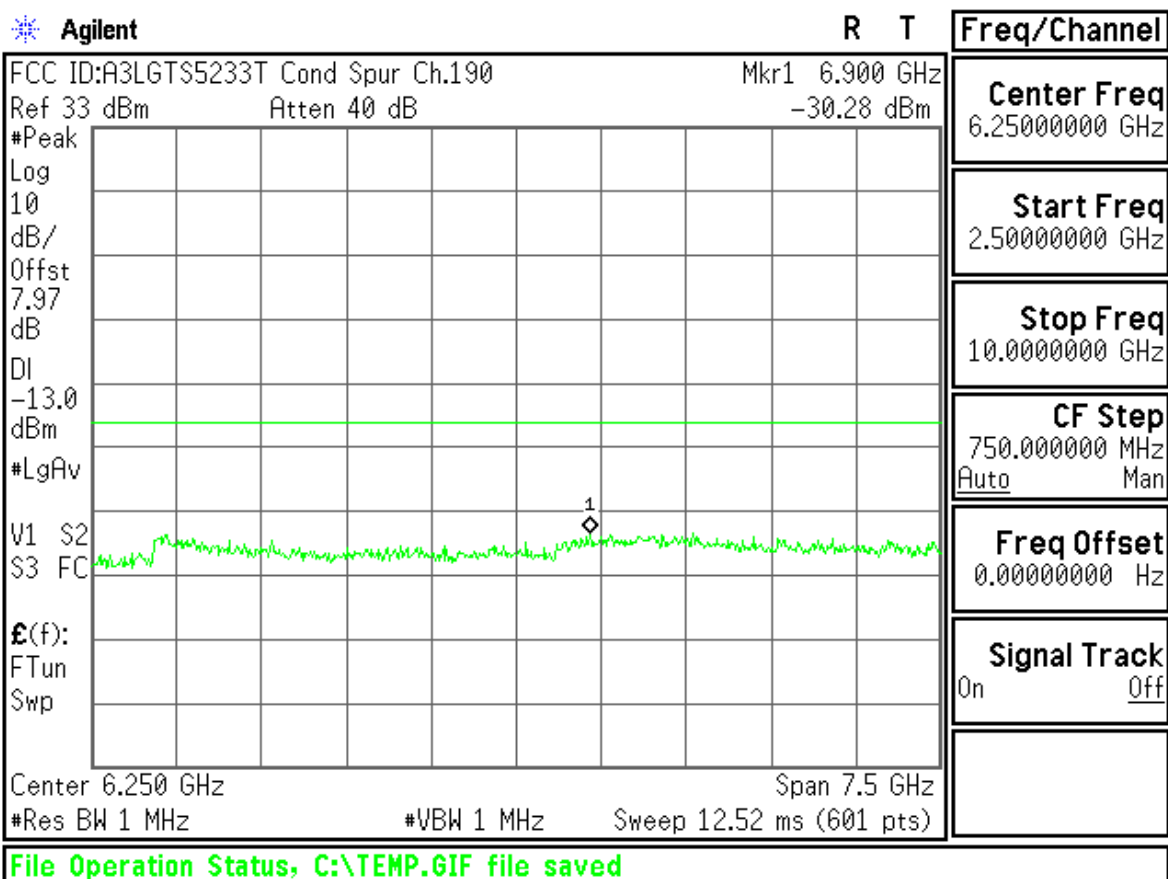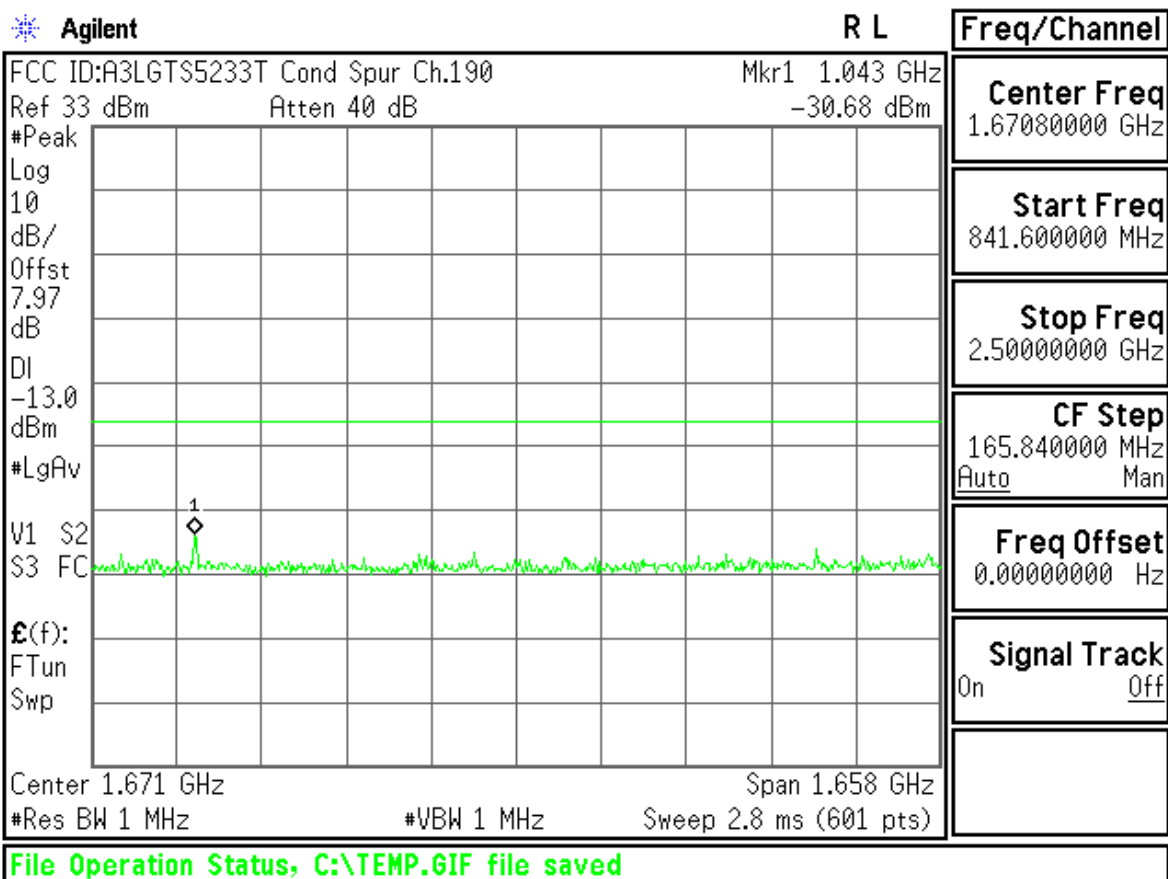

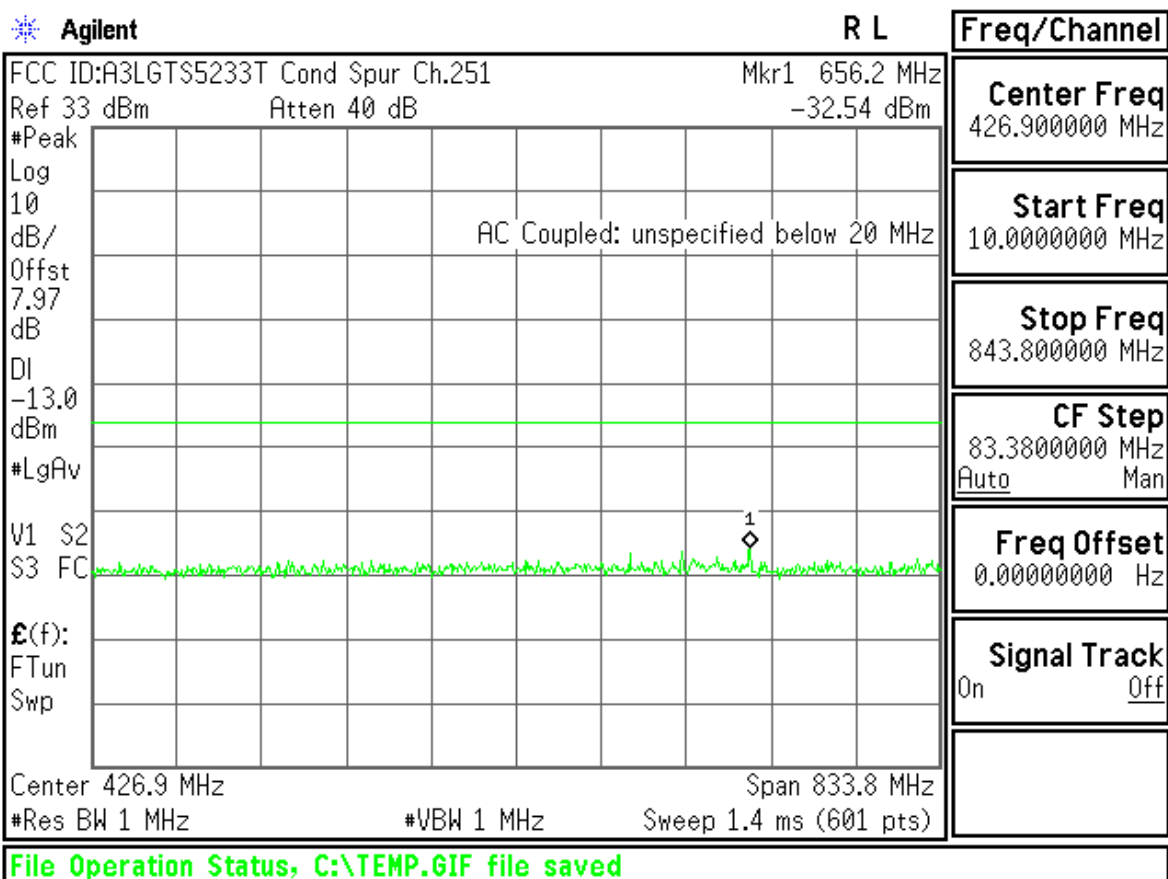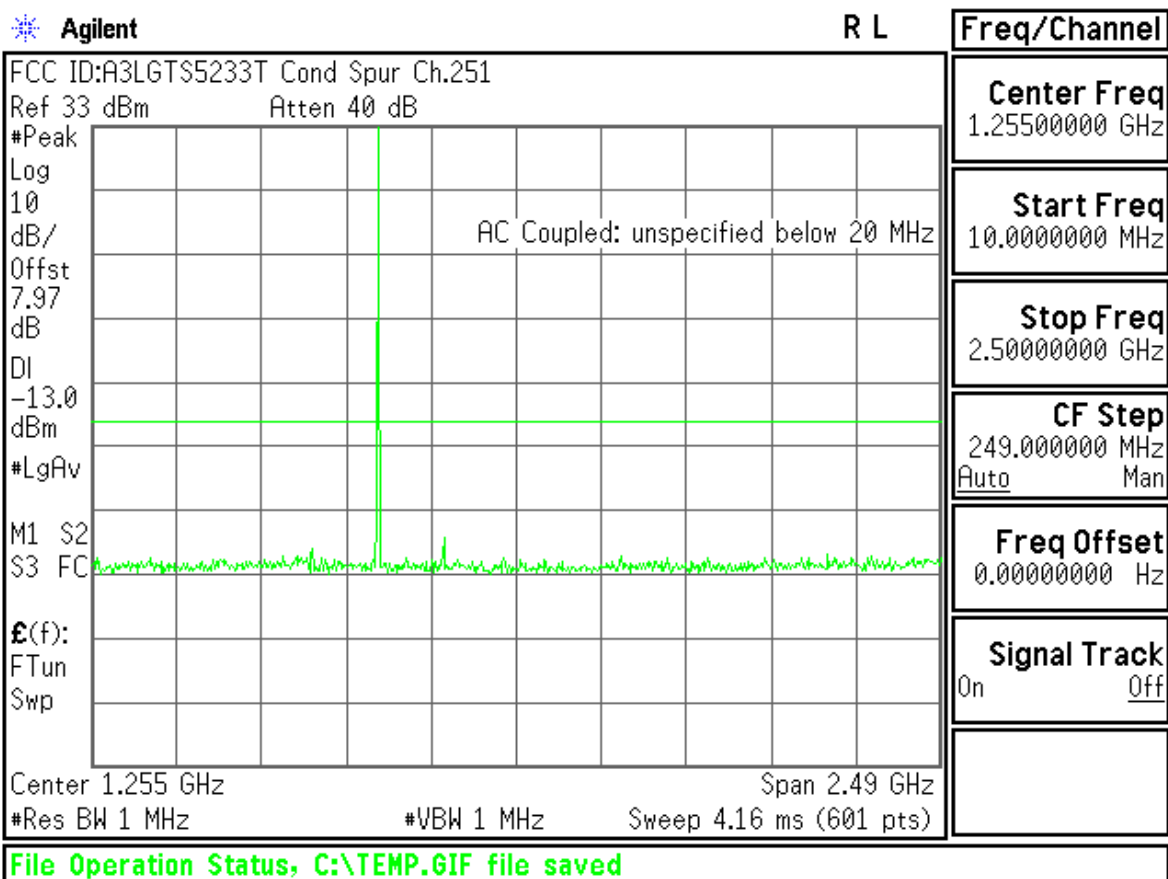

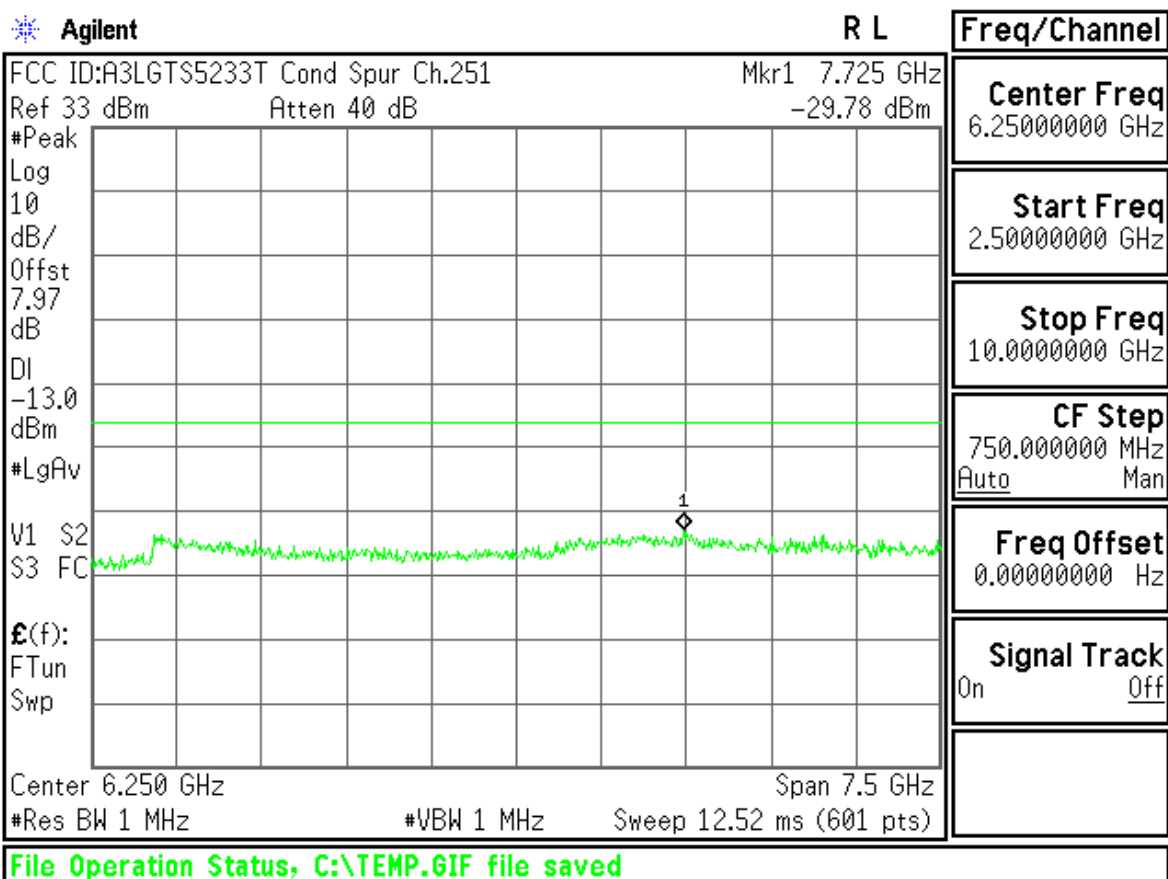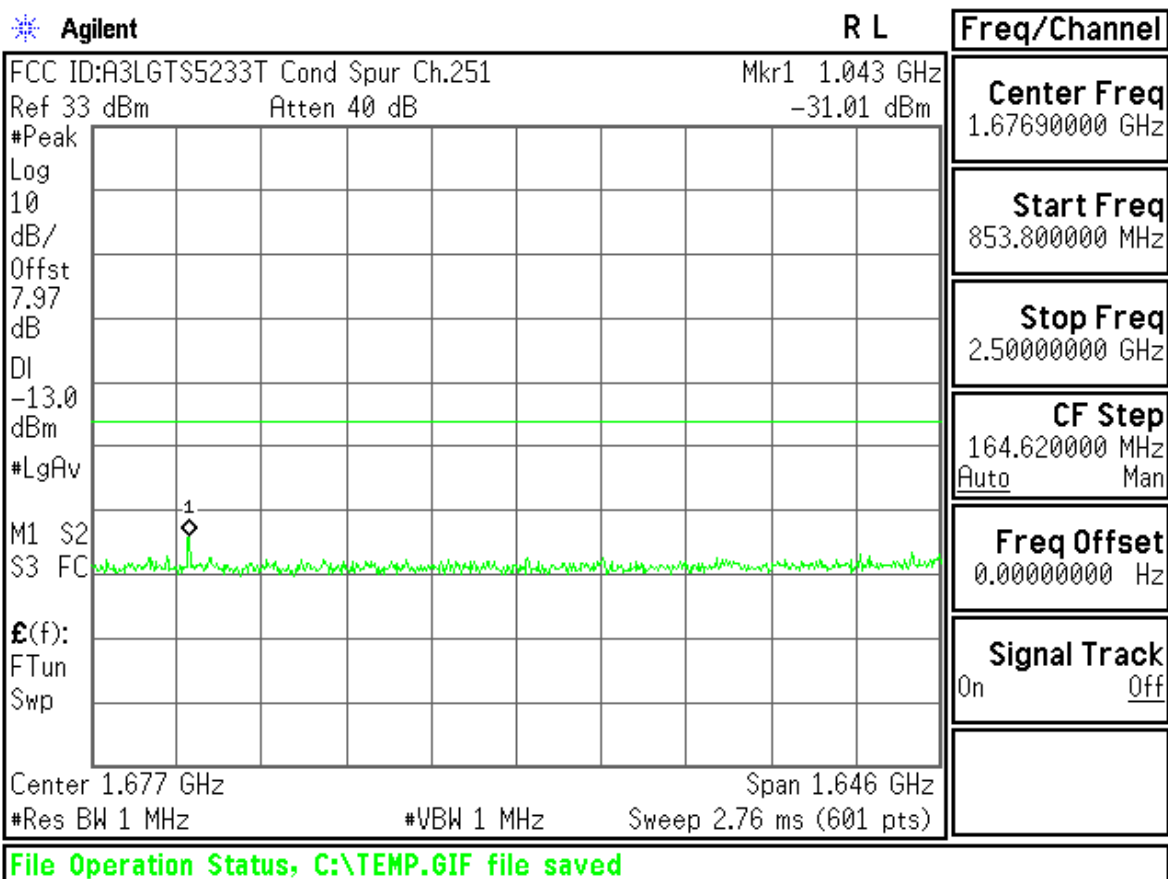

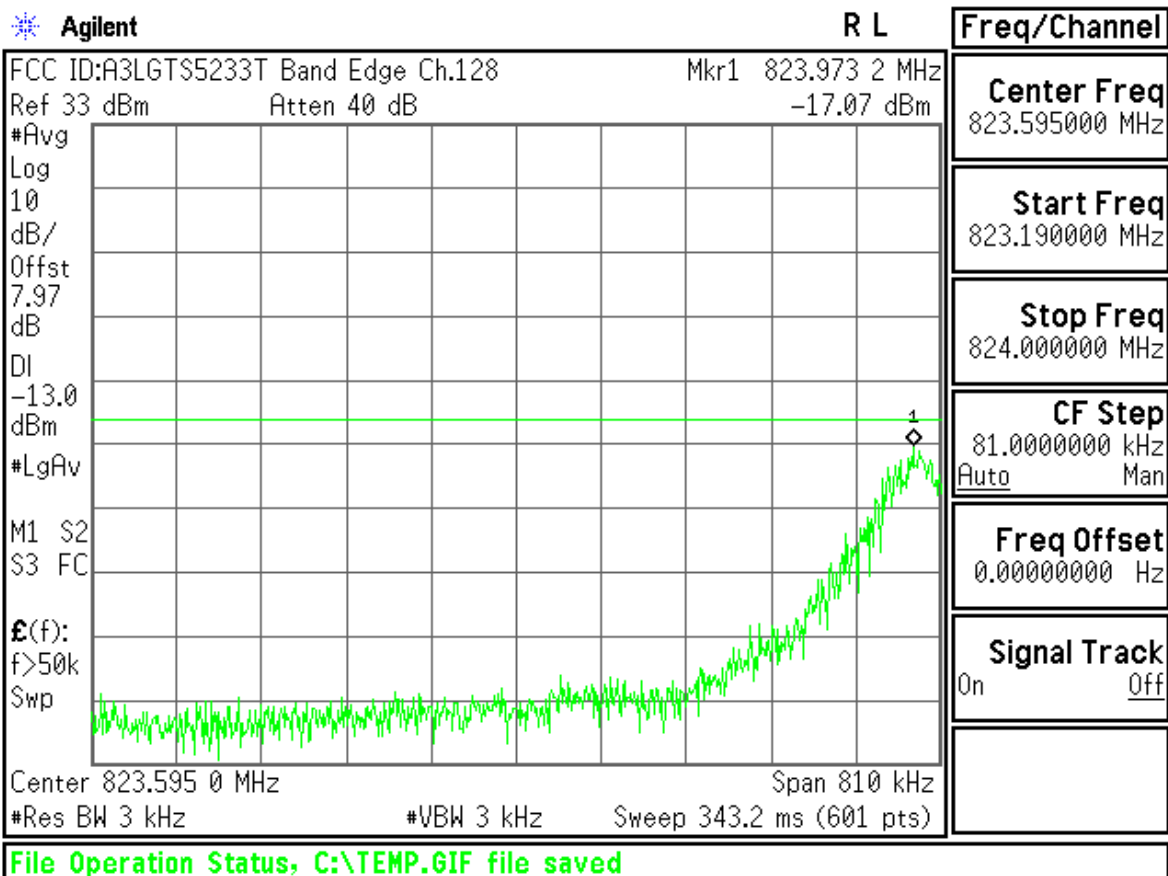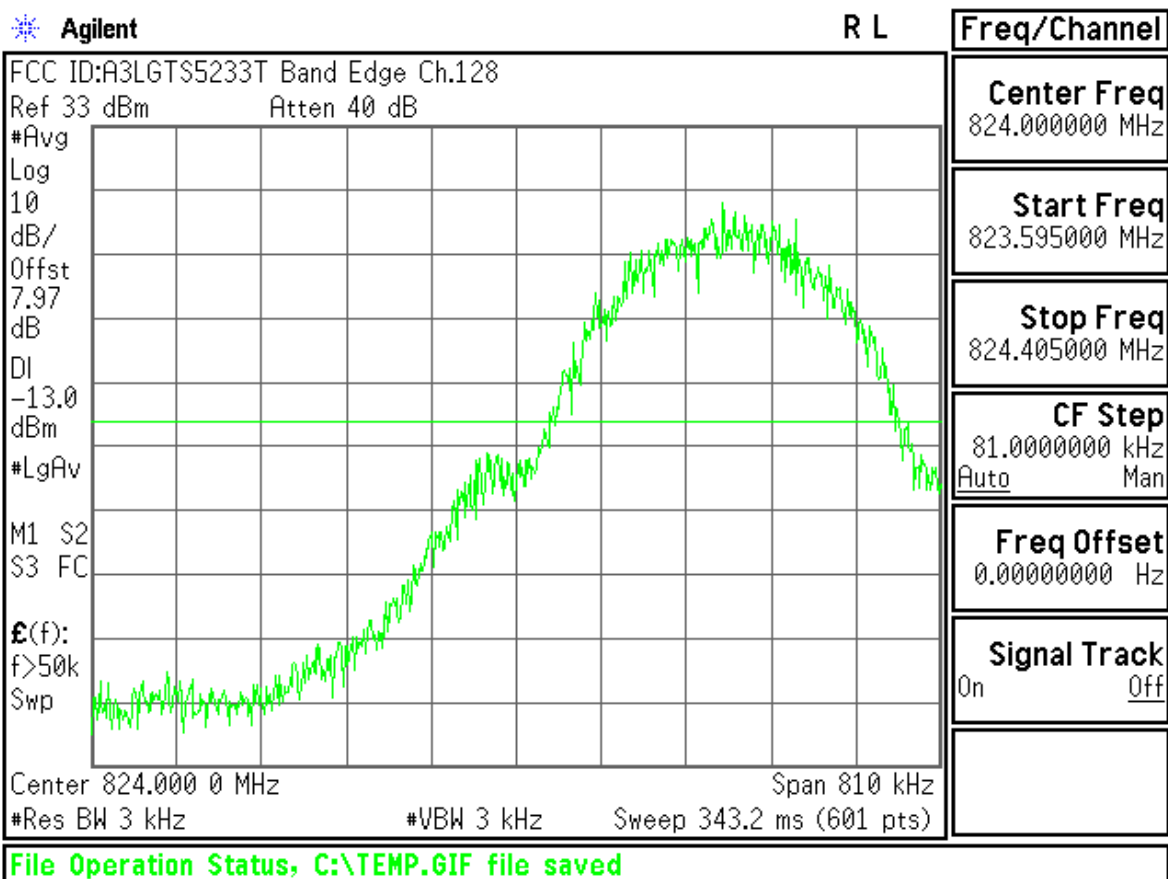

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

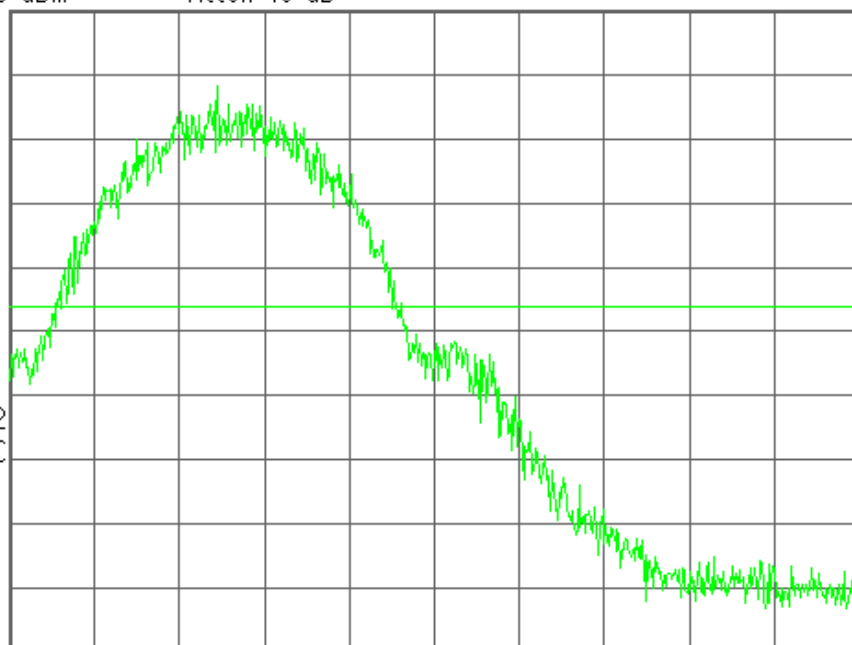

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.251

Mkr1 849.020 1 MHz

Ref 33 dBm

Atten 40 dB

-17.80 dBm

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

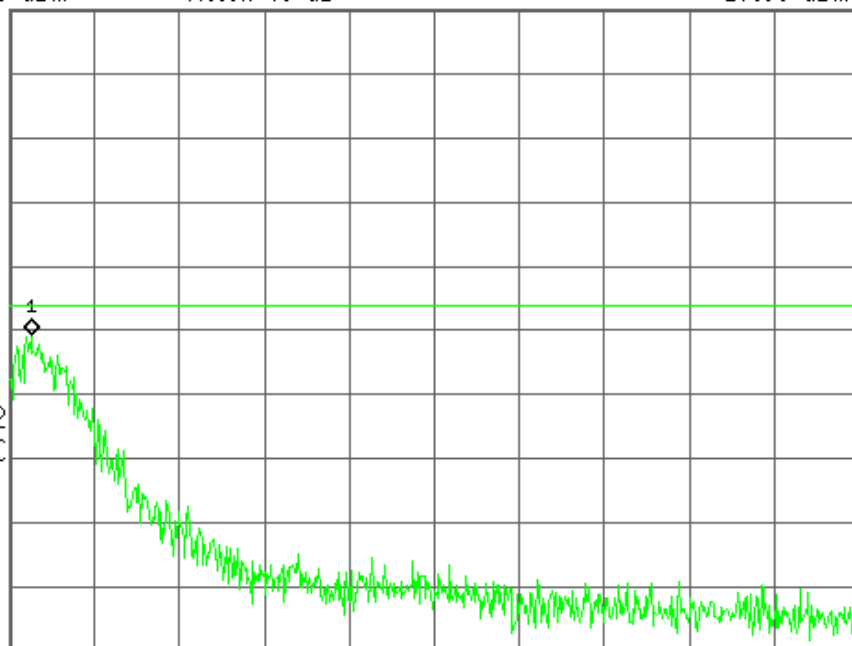

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent


R T

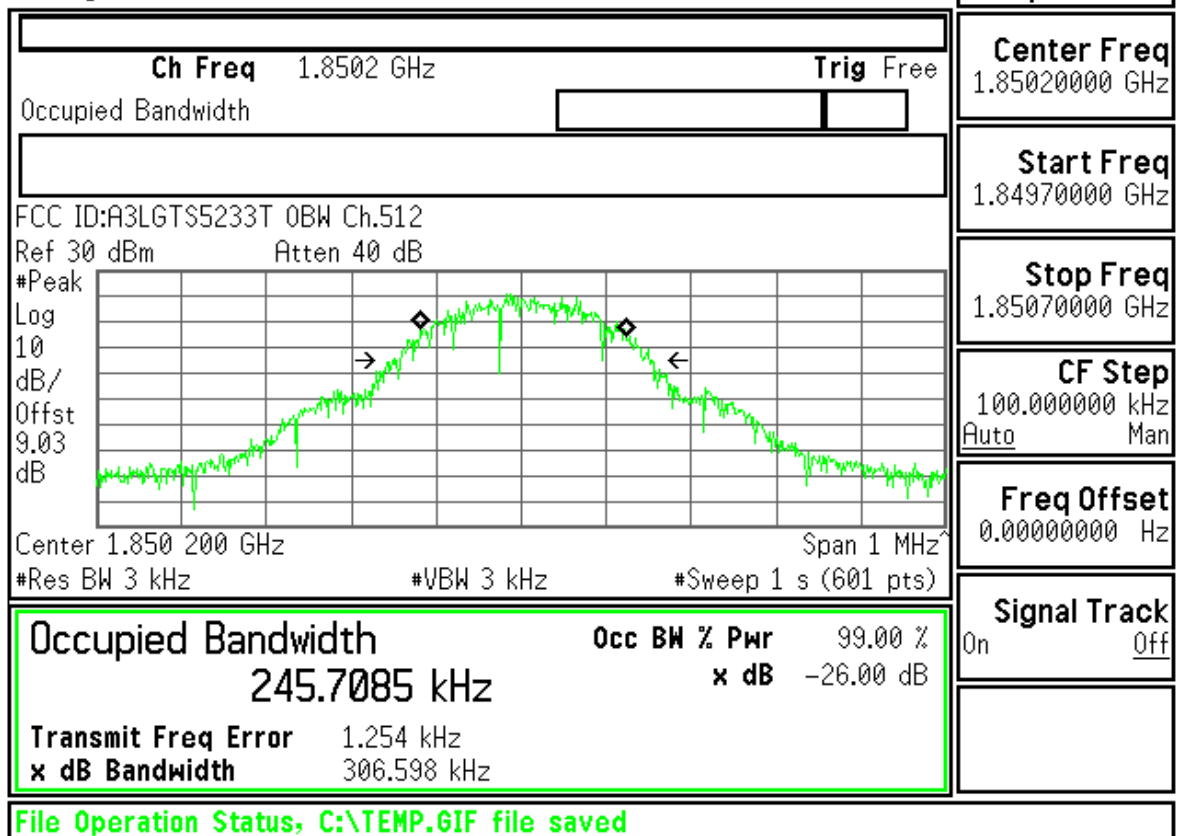


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

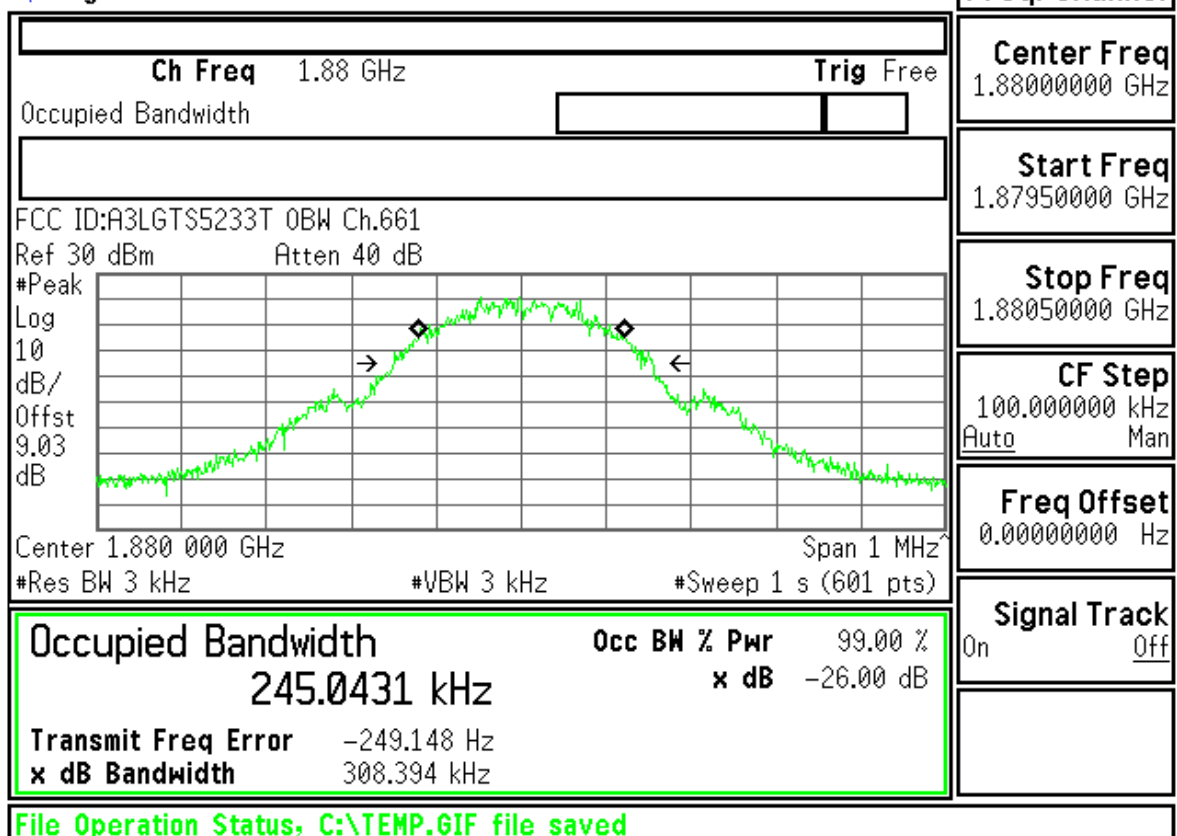

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

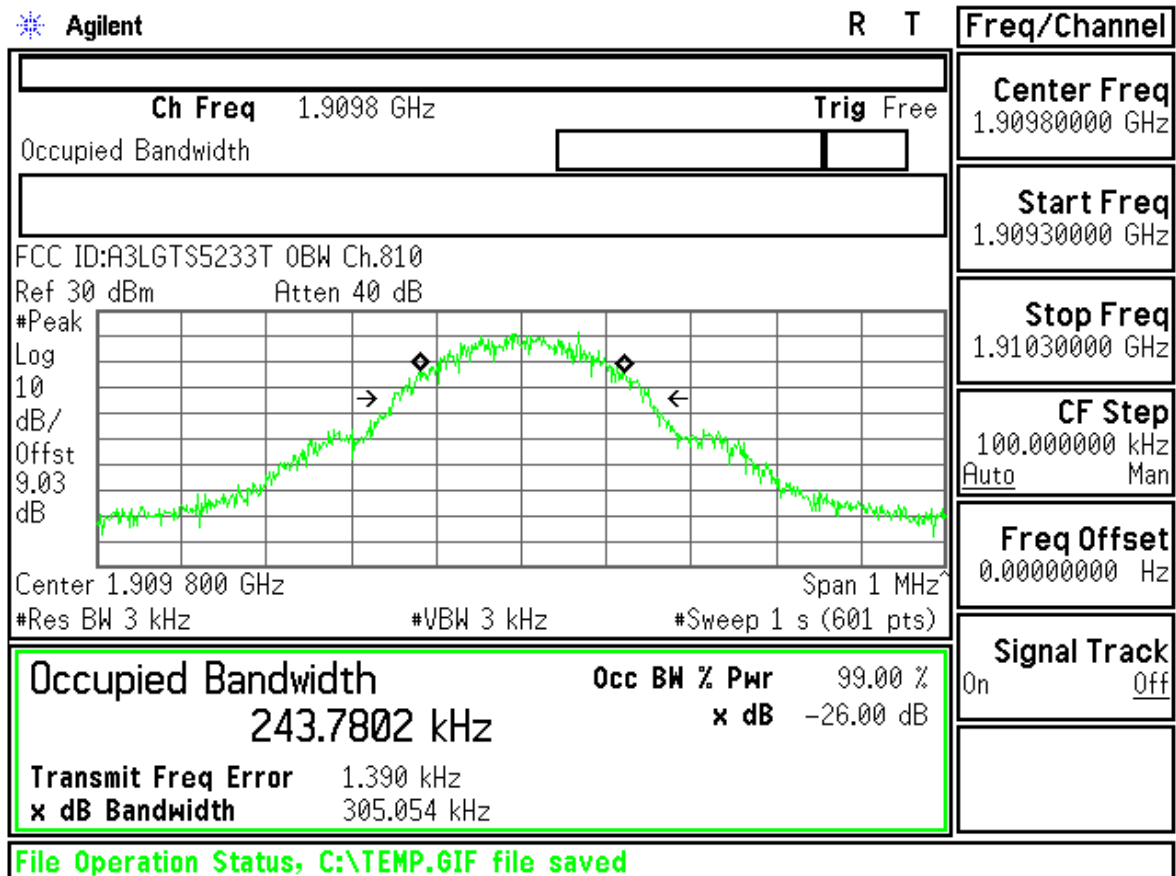

FCC ID : A3LGTS5233T Transmit Power 512CH

Measurement/Instrument Screen																																										
Control		Transmit Power								TCH Parms																																
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.48</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.48</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.48	----	----	----	Estimated Carrier Power	29.48	----	----	----	Downlink Traffic Power ▾																	
											Burst 1	Burst 2	Burst 3	Burst 4																												
										Burst Power	29.48	----	----	----																												
										Estimated Carrier Power	29.48	----	----	----																												
										Traffic Band																																
PCS																																										
Swap Window Positions		<table><tr><th colspan="5">Phase & Frequency Error</th></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td>4.08</td><td>1.45</td><td colspan="2">-32.20</td></tr><tr><td>Maximum</td><td>7.26</td><td>2.39</td><td colspan="2">58.92</td></tr><tr><td>Average</td><td>5.60</td><td>1.88</td><td colspan="2">-5.56</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td colspan="2">Pass</td></tr></table> 50 / 50 Single								Phase & Frequency Error						Peak Phase °	RMS Phase °	Frequency Hz		Minimum	4.08	1.45	-32.20		Maximum	7.26	2.39	58.92		Average	5.60	1.88	-5.56		Pass/Fail	Pass	Pass	Pass		MS TX Level		
										Phase & Frequency Error																																
											Peak Phase °	RMS Phase °	Frequency Hz																													
										Minimum	4.08	1.45	-32.20																													
										Maximum	7.26	2.39	58.92																													
Average	5.60	1.88	-5.56																																							
Pass/Fail	Pass	Pass	Pass																																							
0																																										
Channel Mode Setup ▾																																										
Return																																										
1 of 2		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="4"></td><td colspan="2"></td></tr><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td>R T</td><td>Help</td><td></td><td></td></tr></table>										Active Cell Connected				Sys Type: GSM													IntRef	Offset	R T	Help			1 of 2							
		Active Cell Connected				Sys Type: GSM																																				
			IntRef	Offset	R T	Help																																				
Help; CALL:ORIGinate																																										

Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								661	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
								Return	
							1 of 2		
Help; CALL:ORIGinate									

Burst 1				Burst 2				Burst 3				Burst 4			
Burst Power				29.45				----				----			
Estimated Carrier Power				29.45				----				----			

Single

Phase & Frequency Error			
	Peak Phase °	RMS Phase °	Frequency Hz
Minimum	3.69	1.36	-23.11
Maximum	7.83	2.69	16.94
Average	5.63	2.04	-0.15
Pass/Fail	Pass	Pass	Pass

50 / 50 Single

		Active Cell Connected		Sys Type: GSM	

1 of 2				IntRef	Offset	R T	Help		
--------	--	--	--	--------	--------	-----	------	--	--

Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								810	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
								Return	
								1 of 2	
Help; CALL:ORIGinate									

Burst 1				Burst 2				Burst 3				Burst 4			
Burst Power				29.69				----				----			
Estimated Carrier Power				29.69				----				----			



Single



Phase & Frequency Error			
	Peak Phase °	RMS Phase °	Frequency Hz
Minimum	4.40	1.39	-30.71
Maximum	8.36	2.65	4.86
Average	5.91	2.04	-11.99
Pass/Fail	Pass	Pass	Pass



50 / 50 Single



		Active Cell Connected		Sys Type: GSM	



1 of 2				IntRef	Offset	R T	Help		
--------	--	--	--	--------	--------	-----	------	--	--

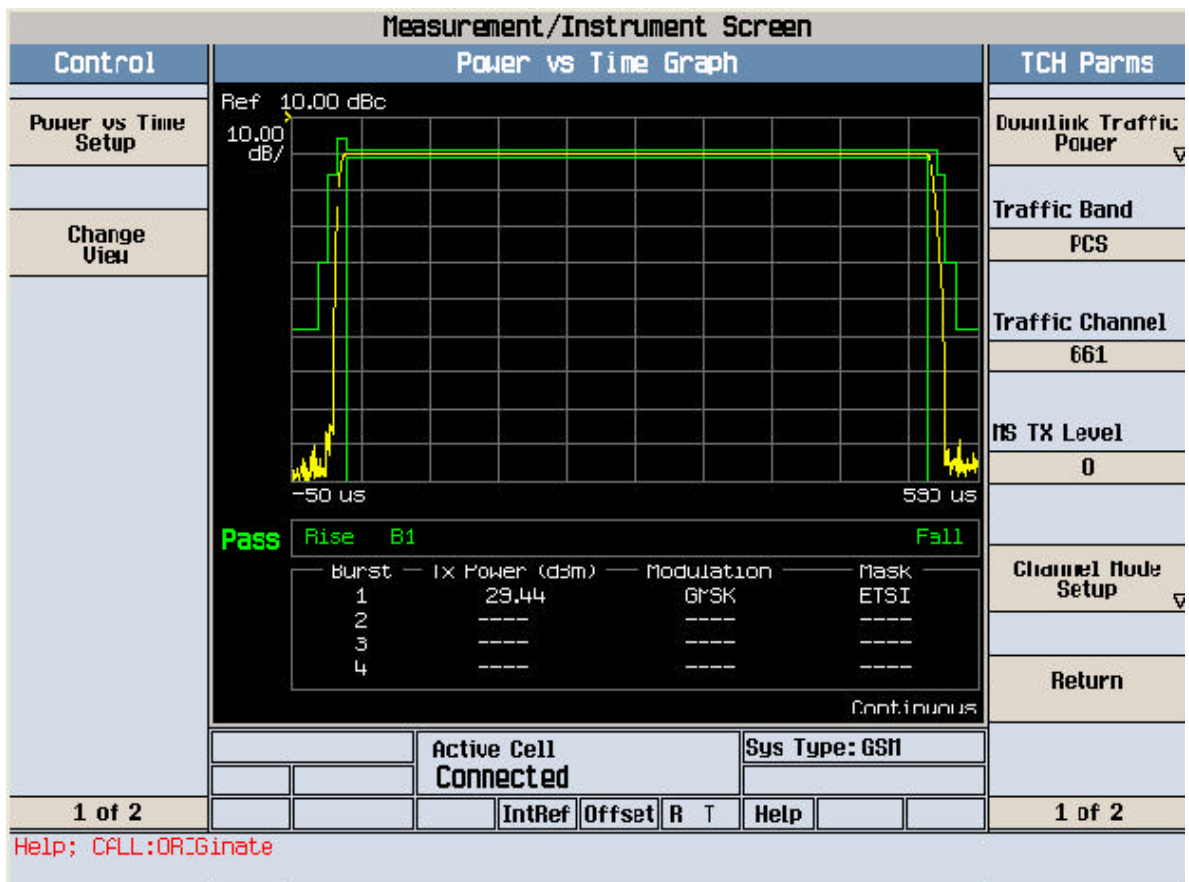
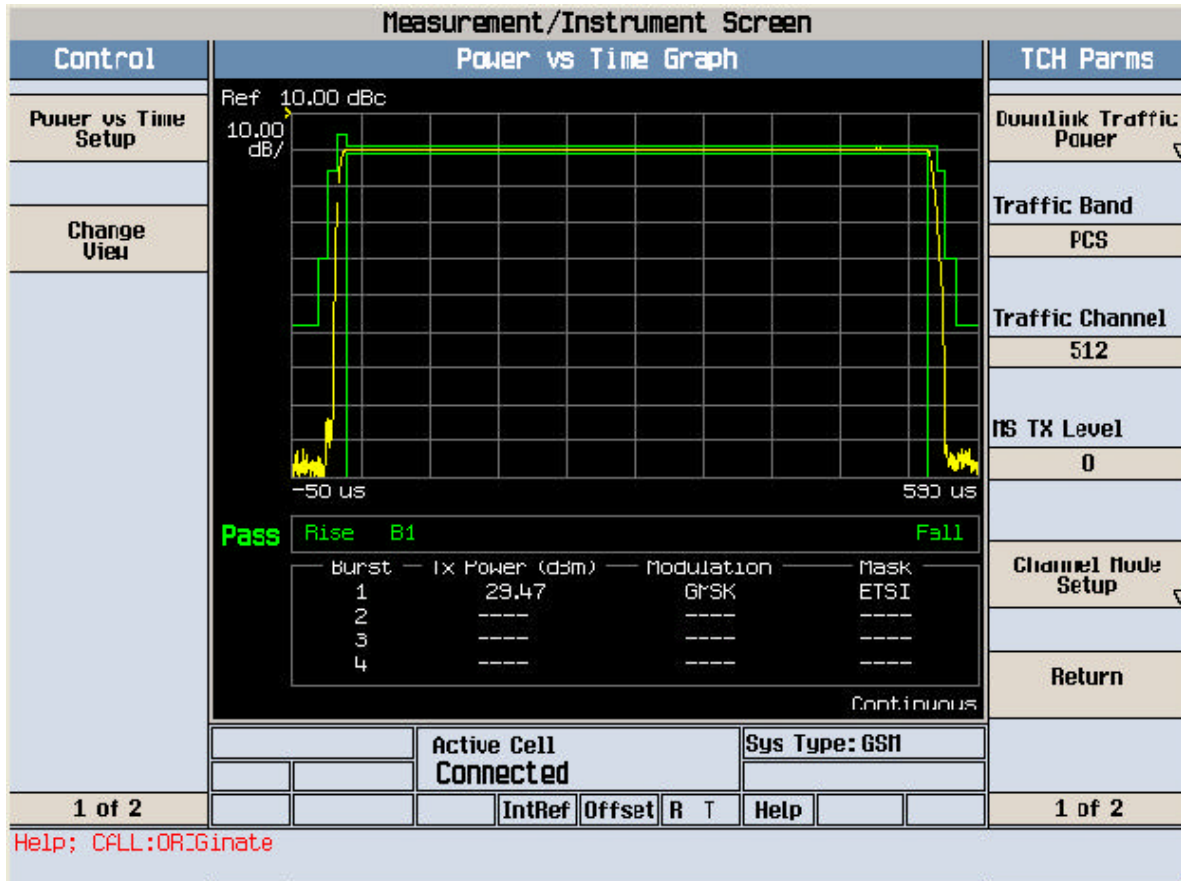


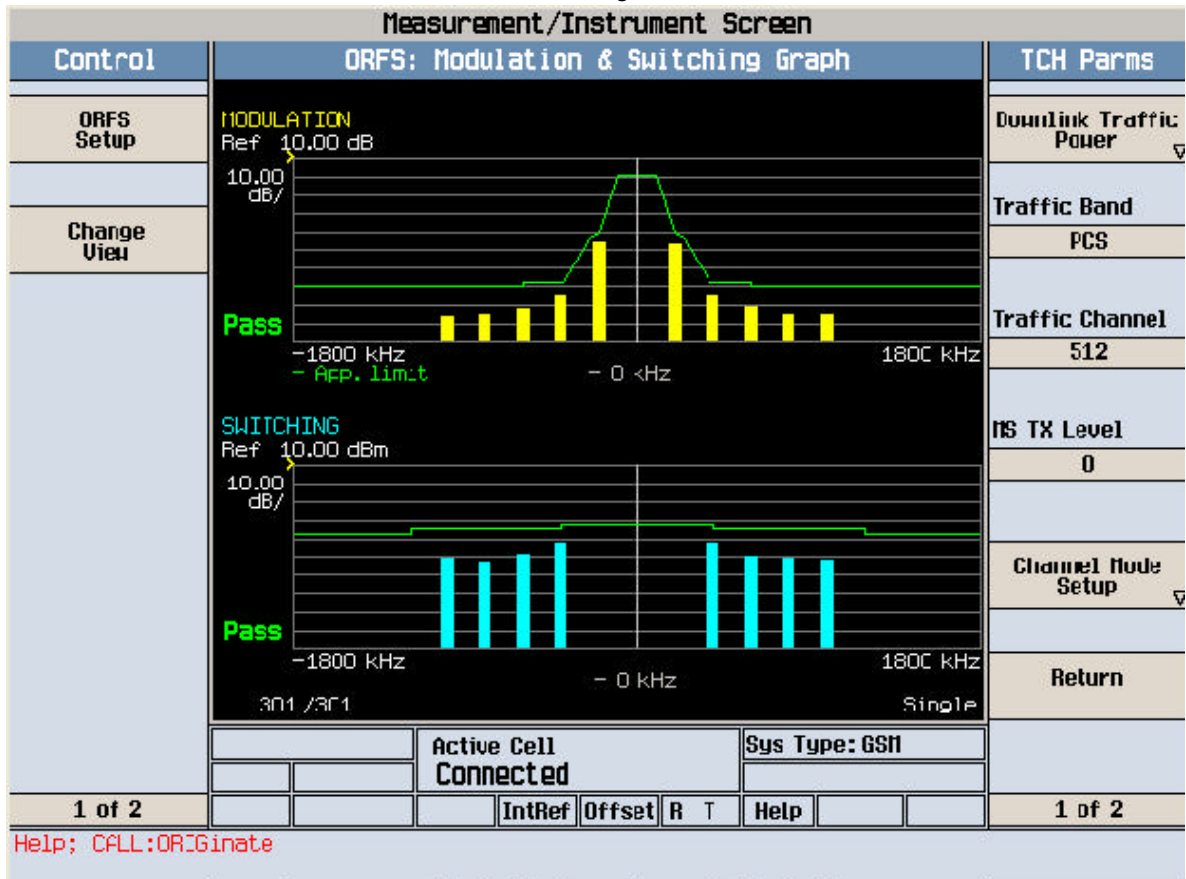
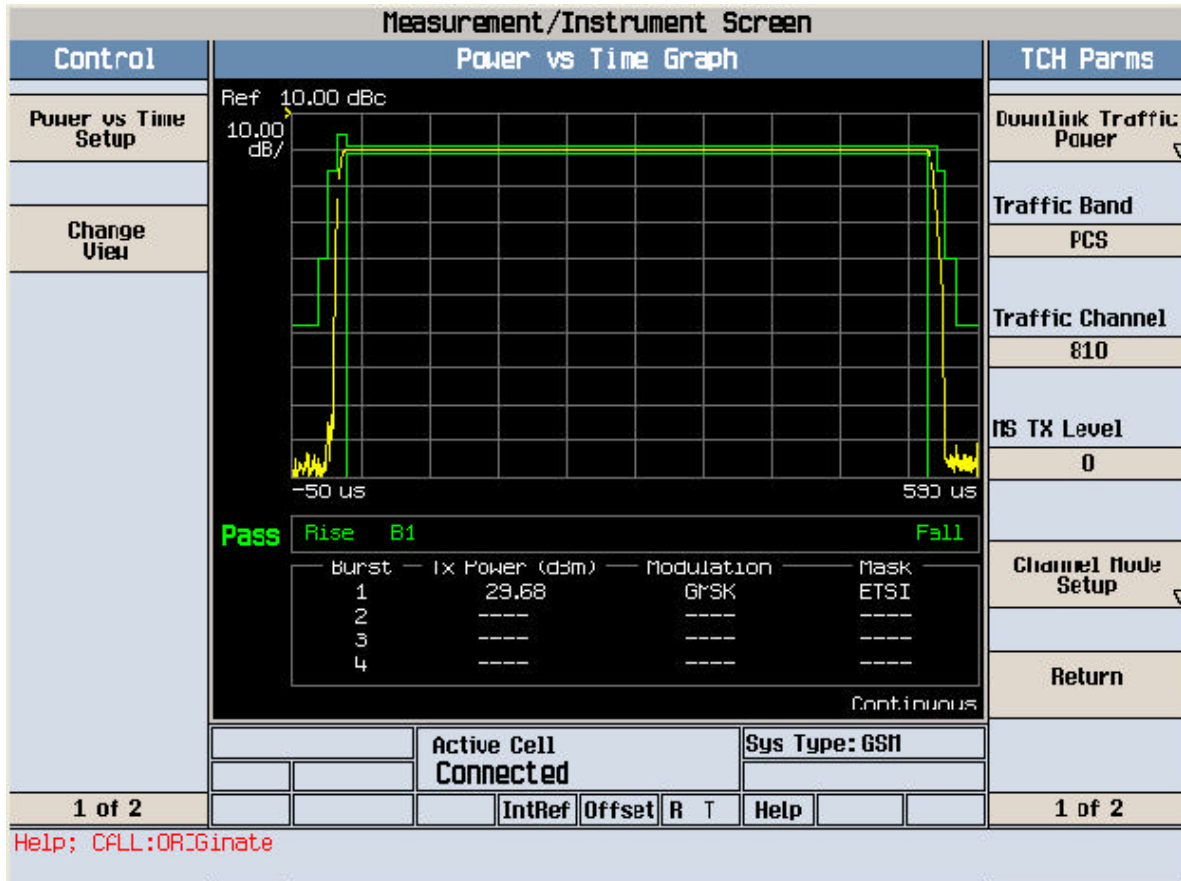


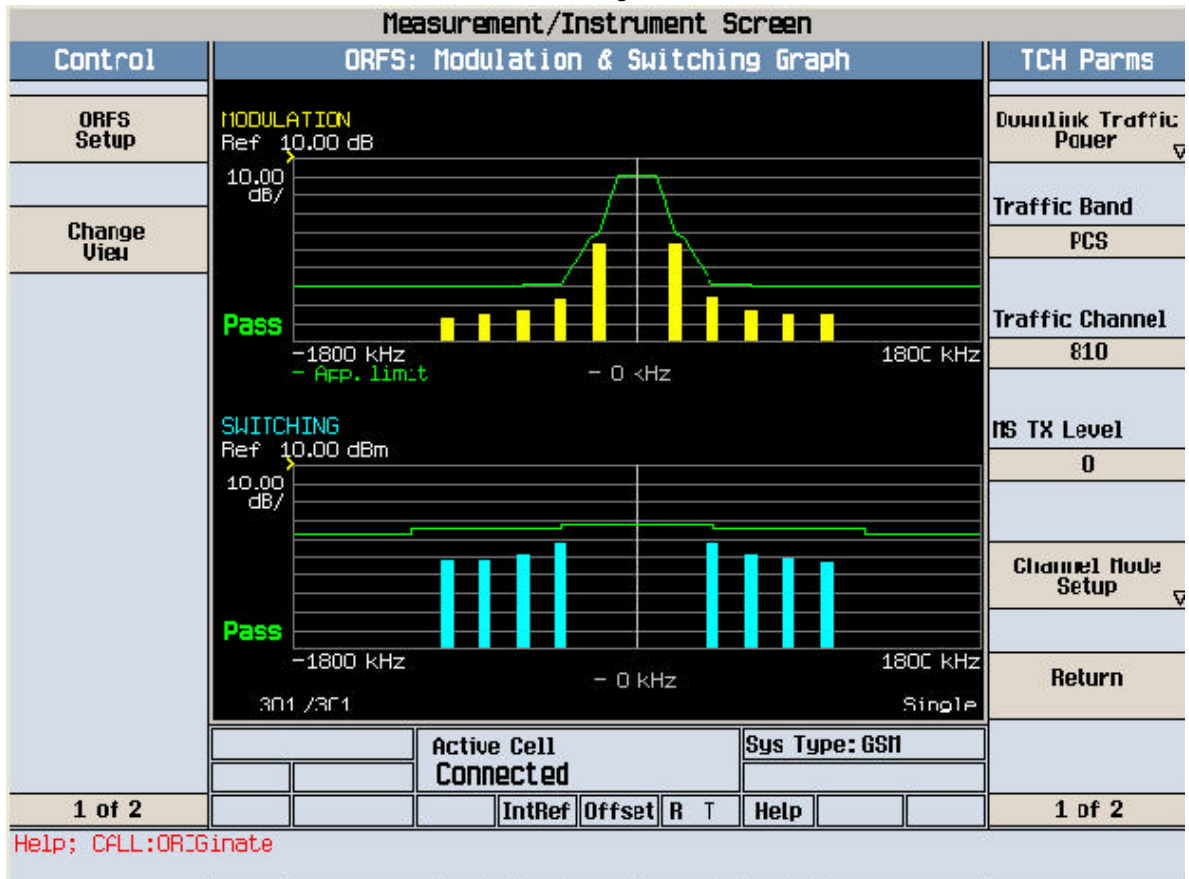
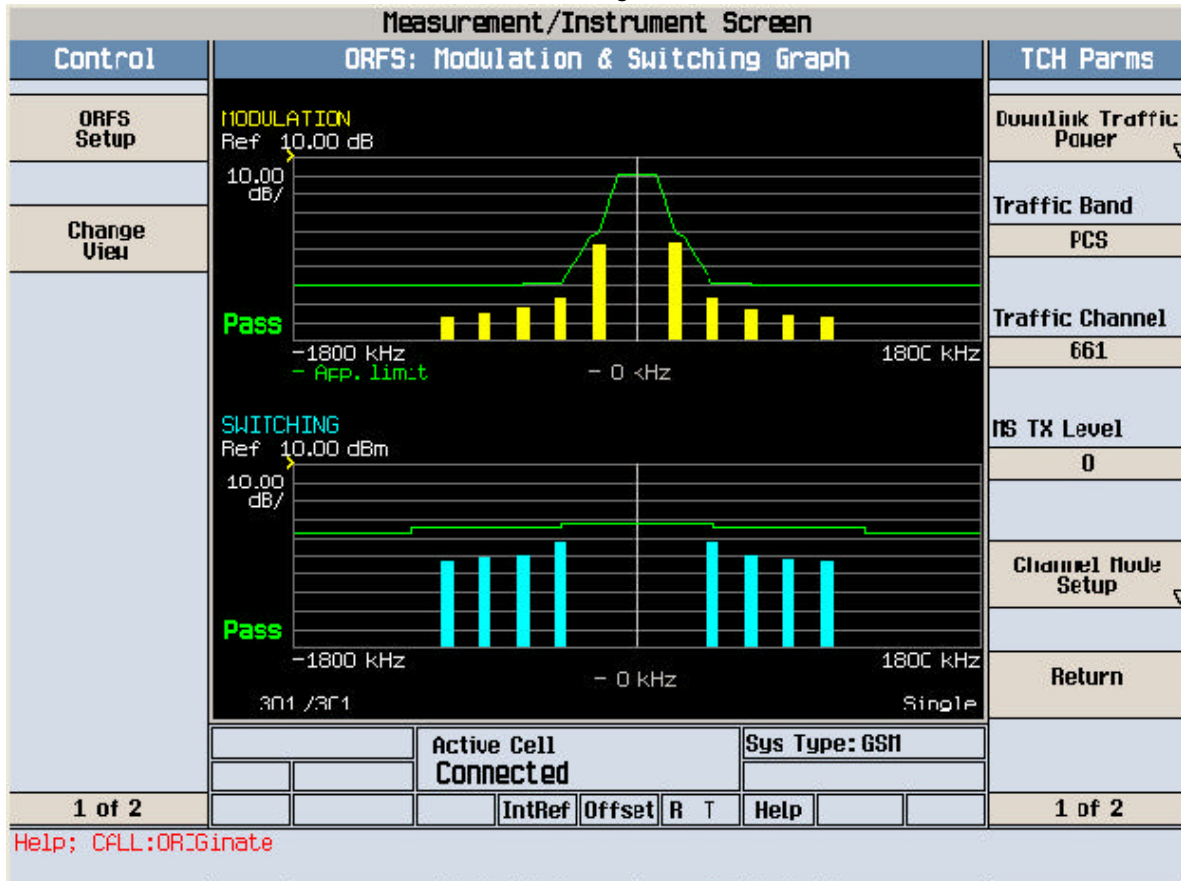


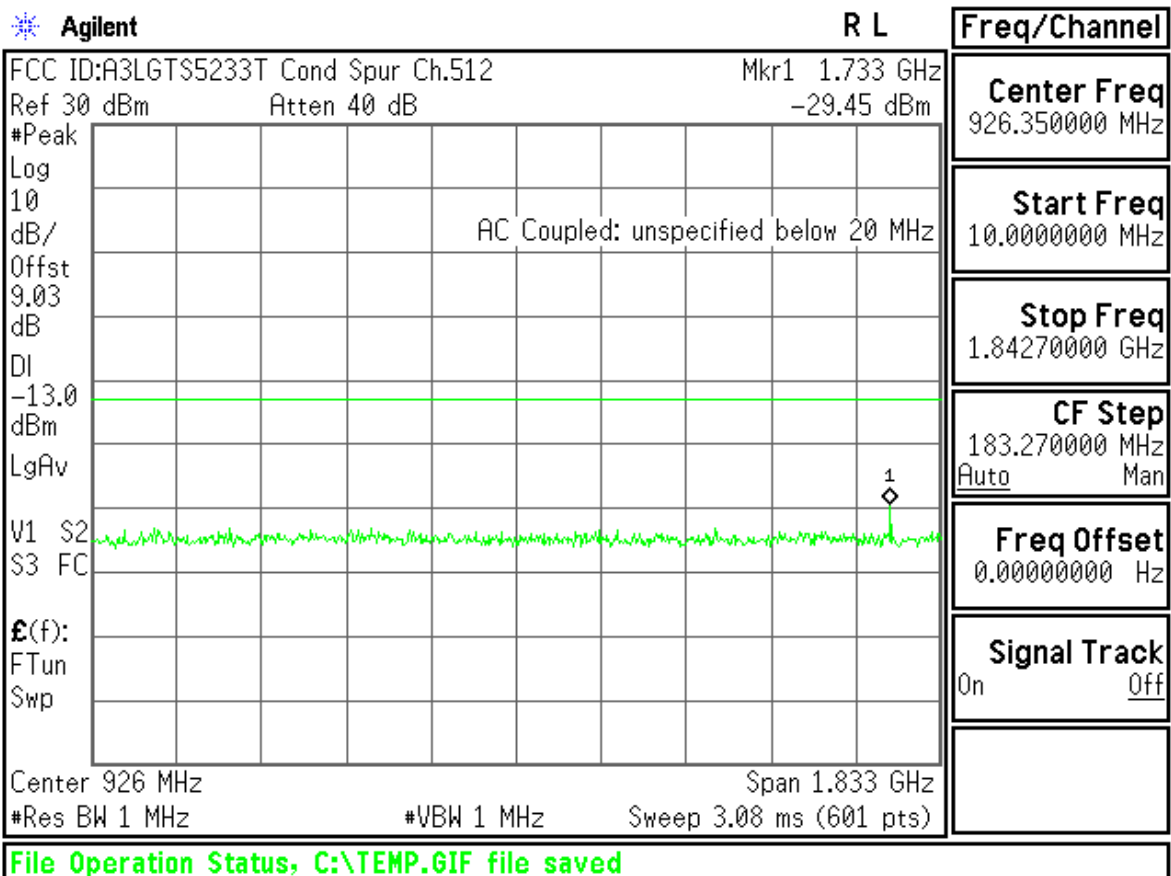
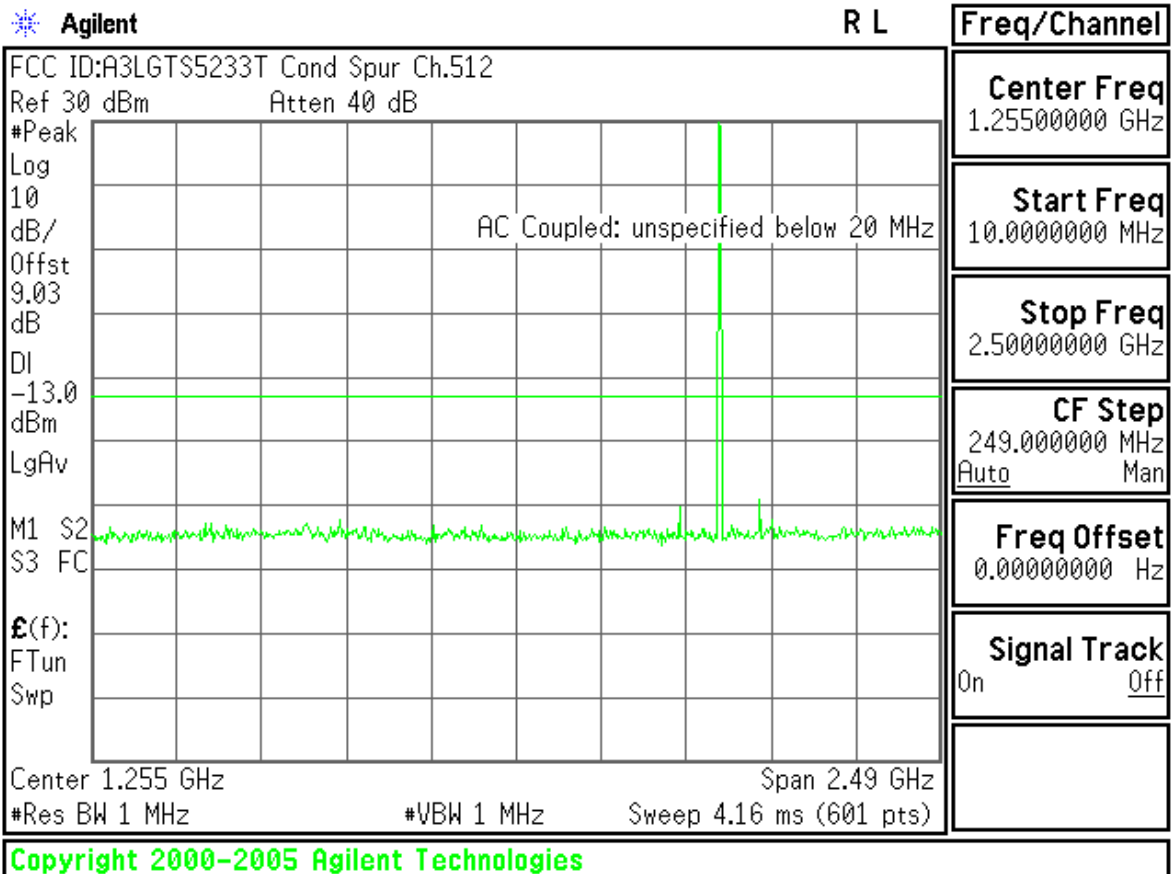


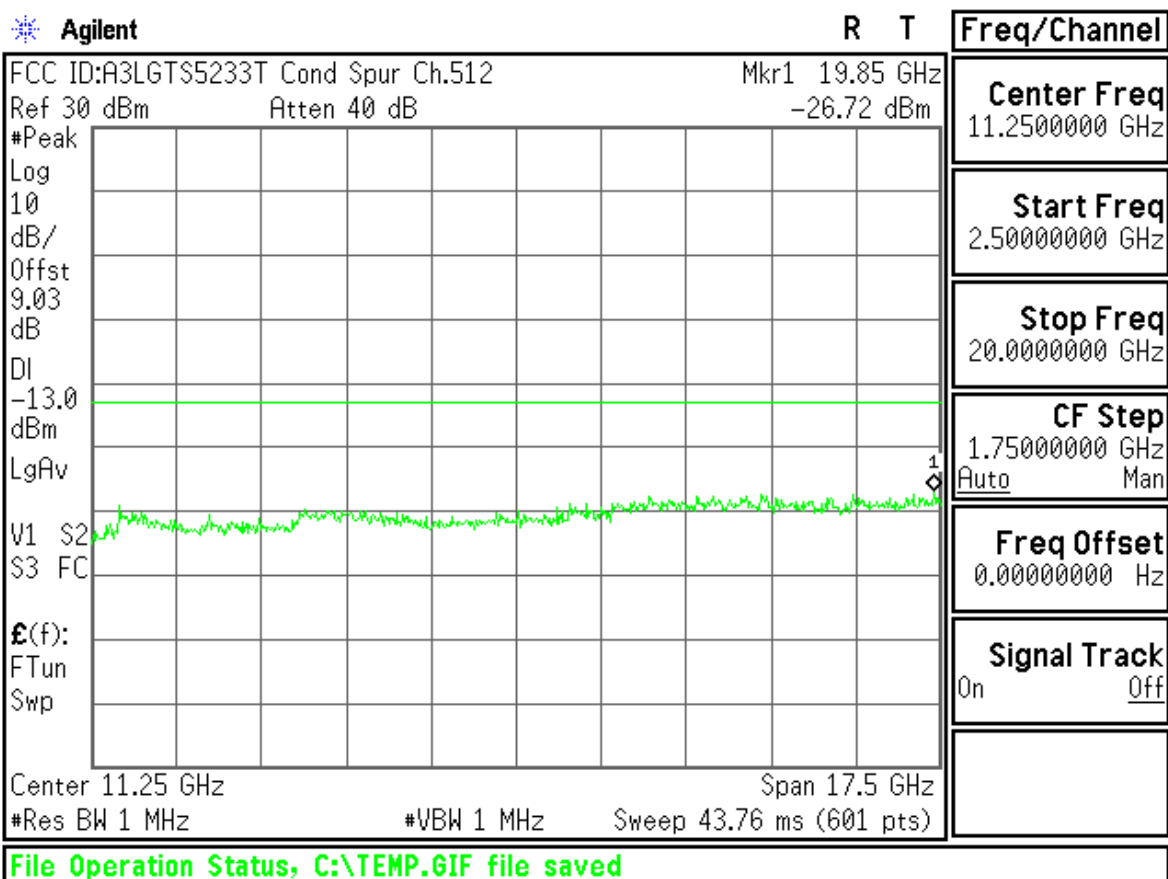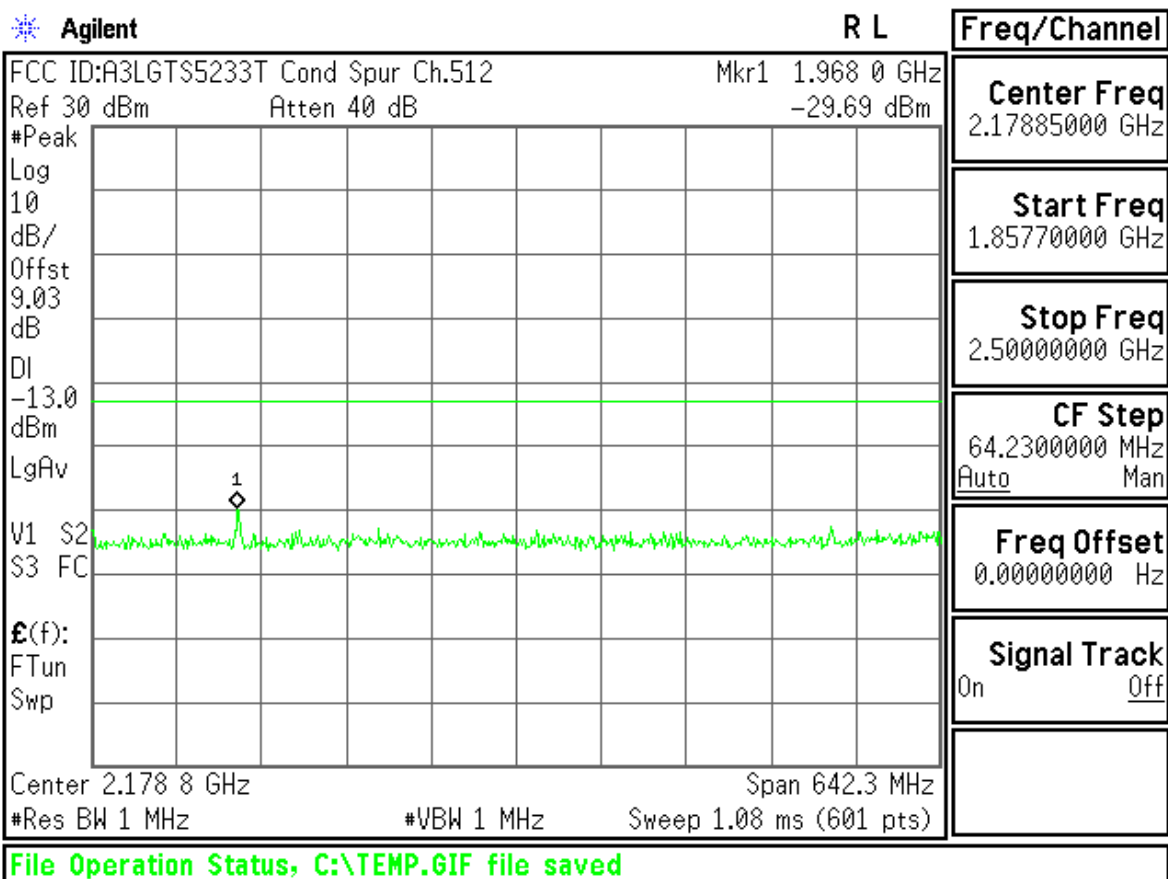

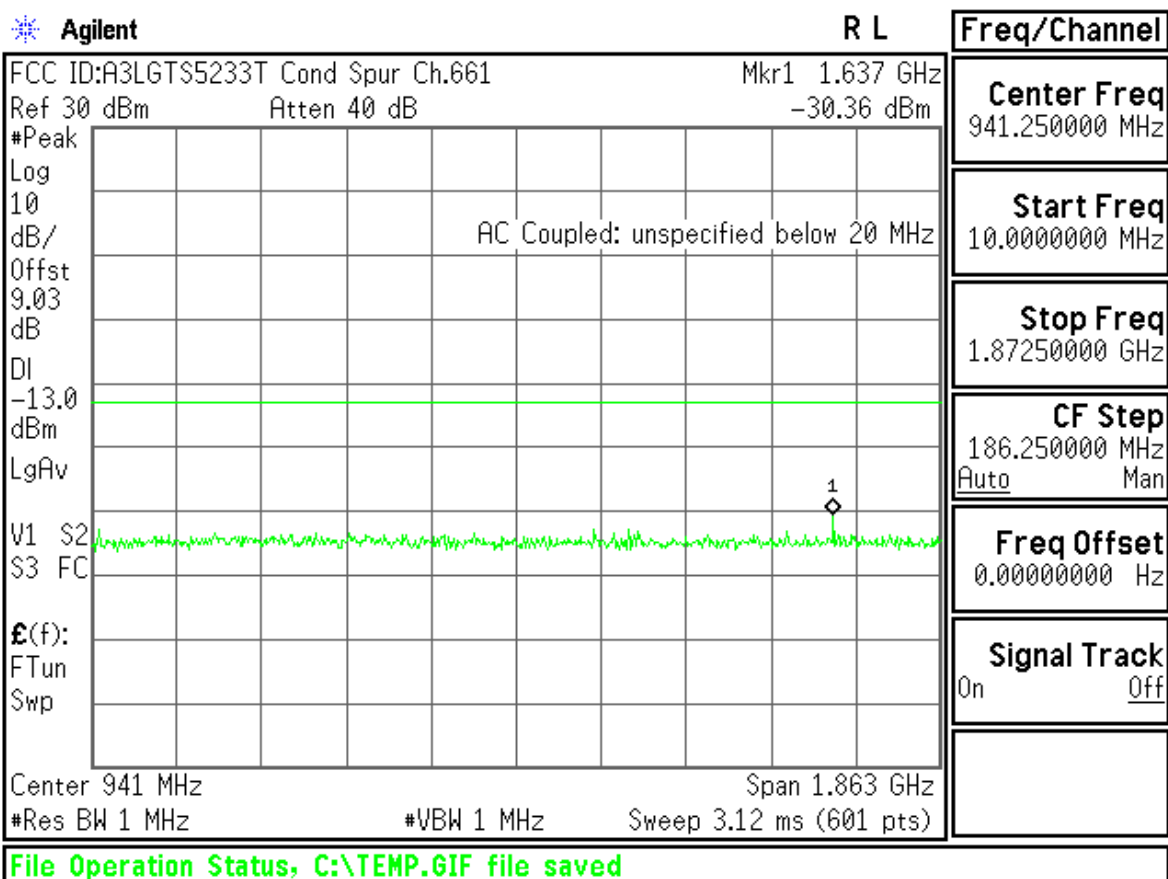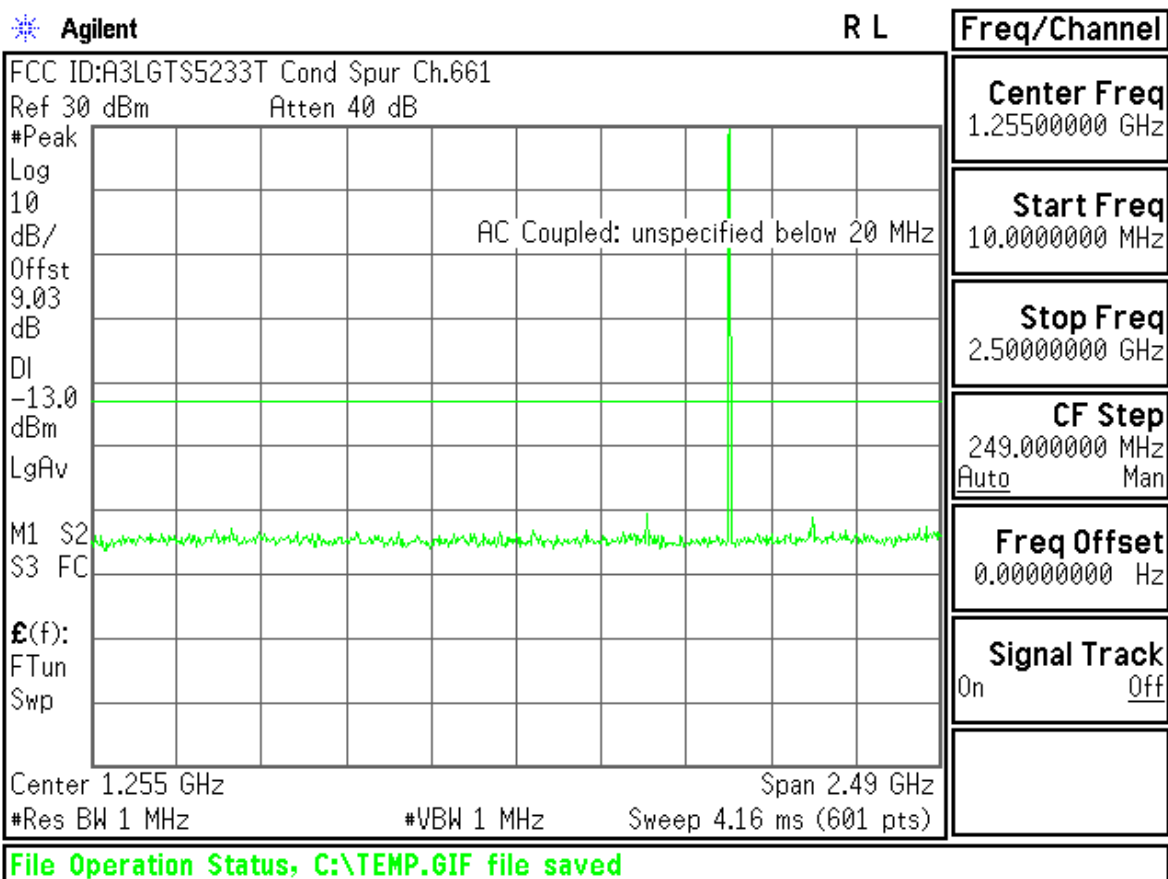

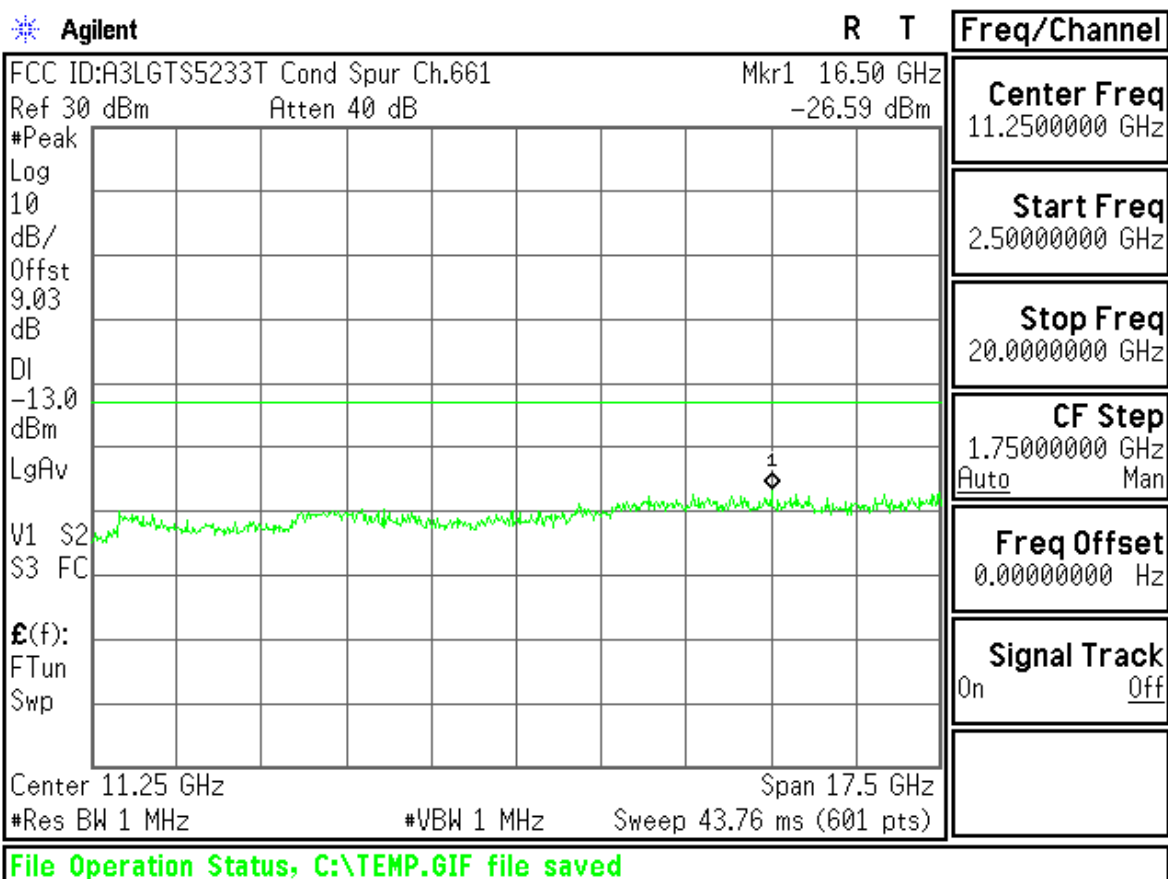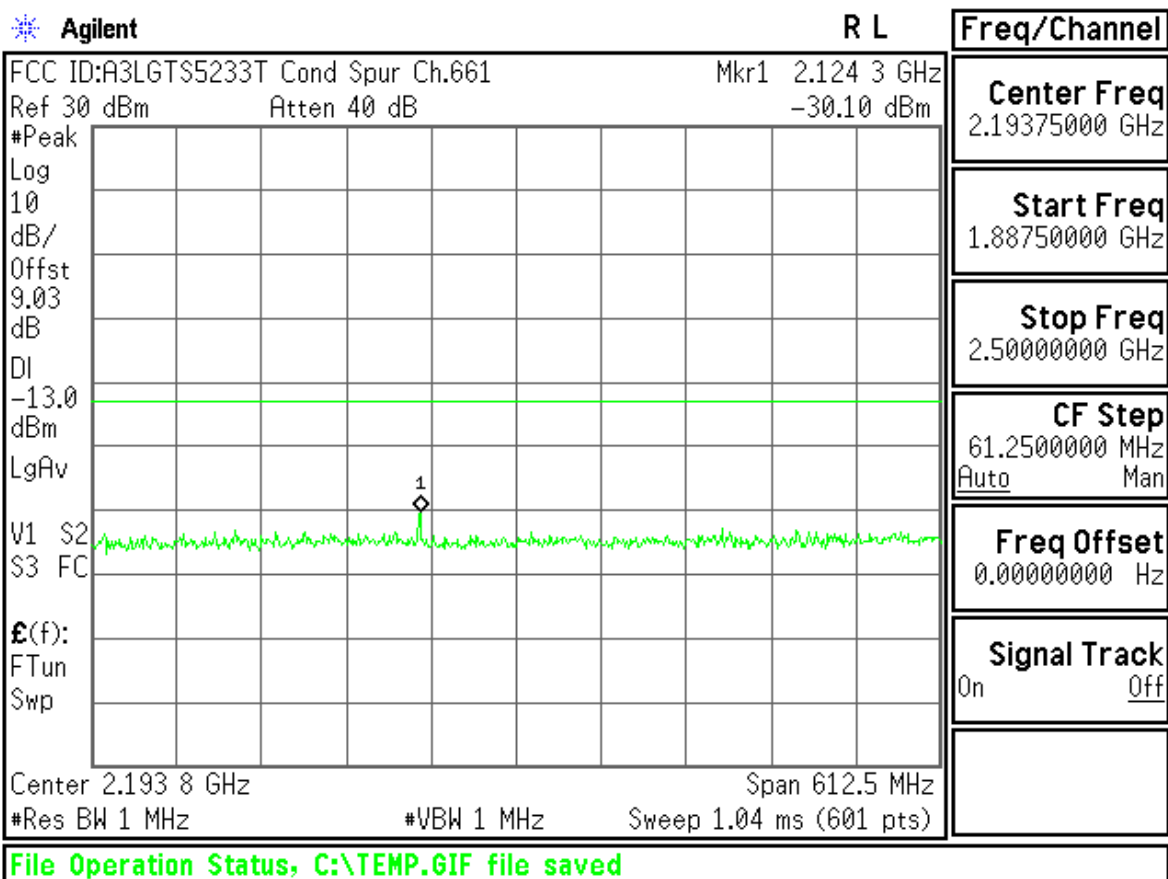

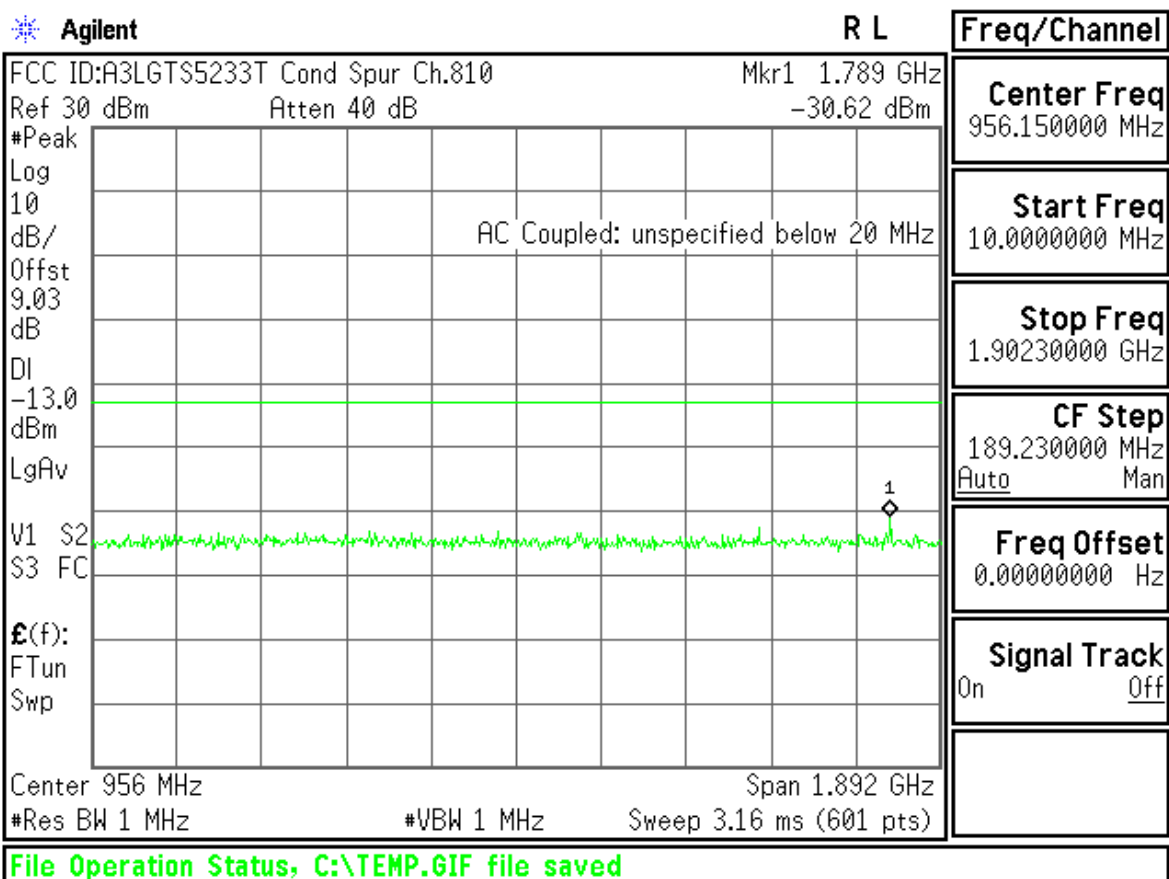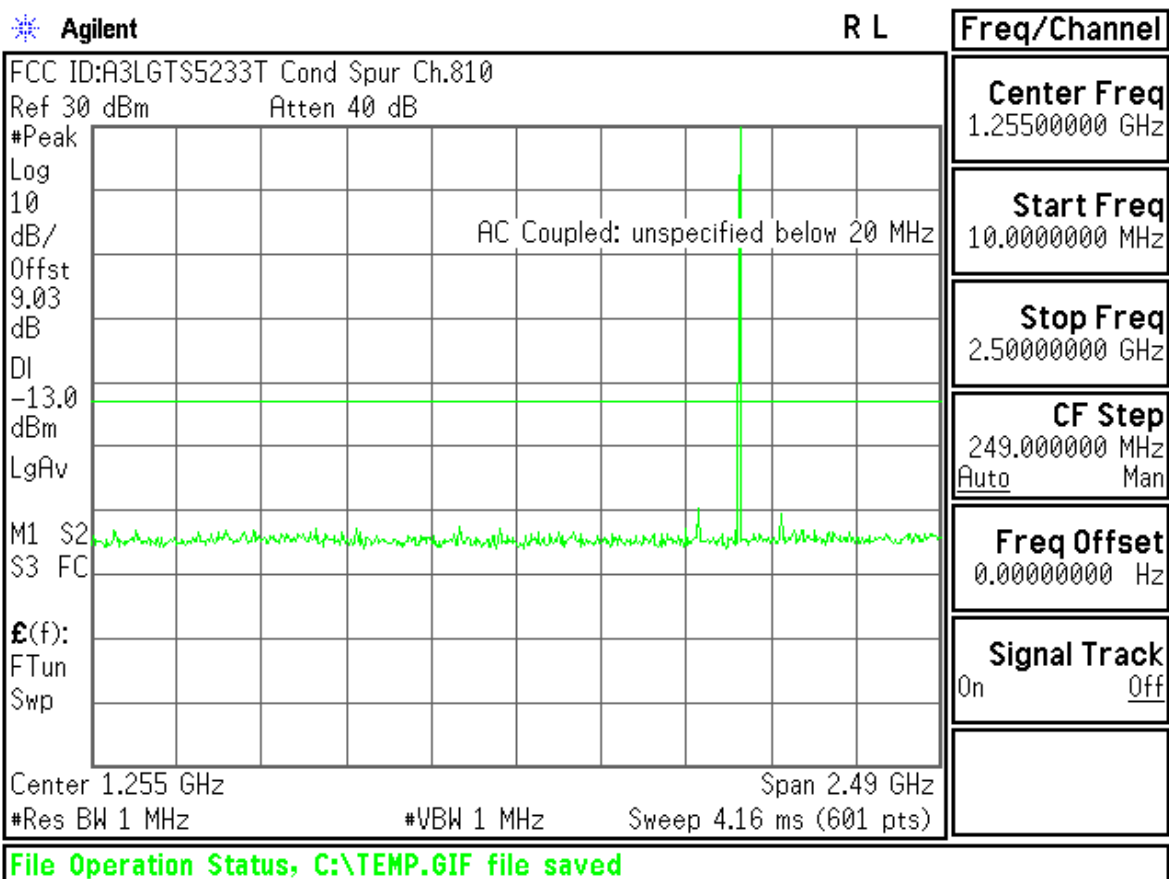

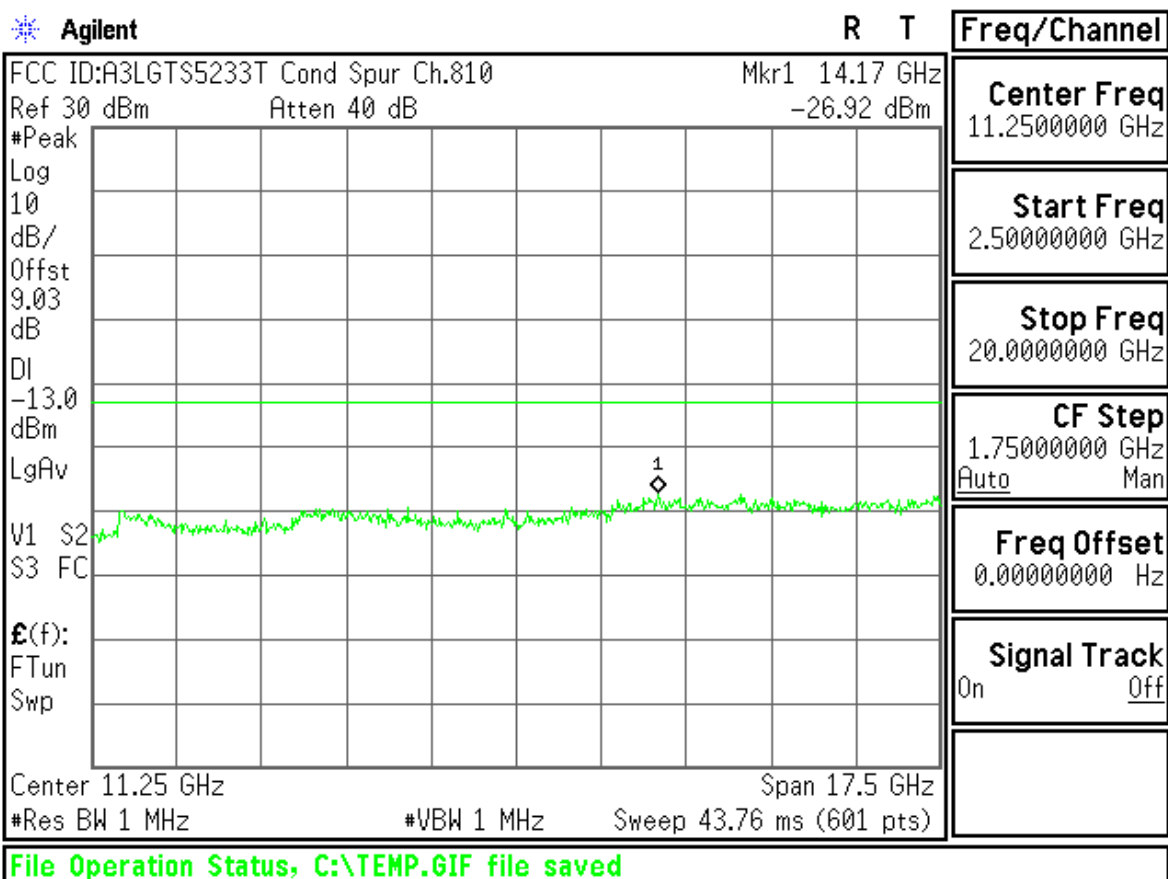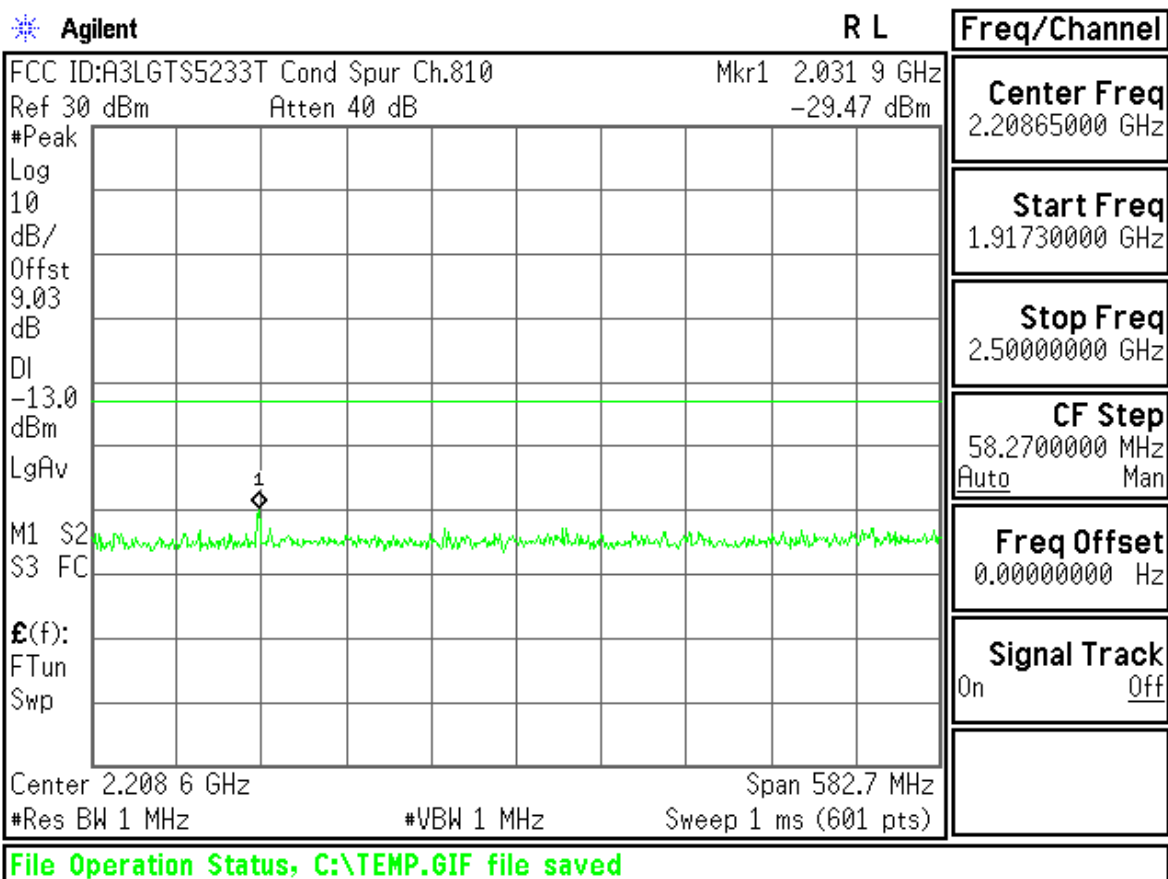

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

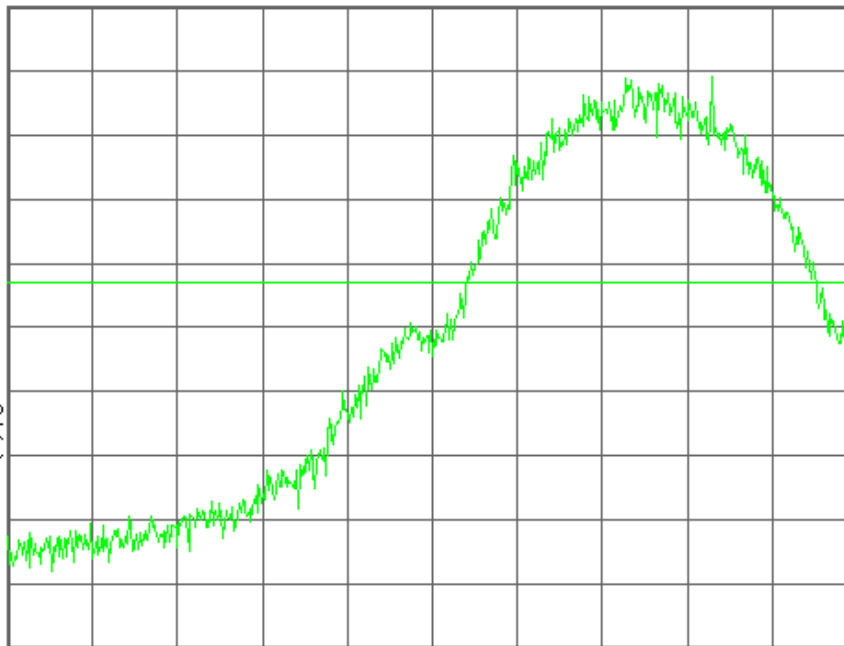

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.512

Mkr1 1.849 975 9 GHz

Ref 30 dBm

Atten 40 dB

-18.84 dBm

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

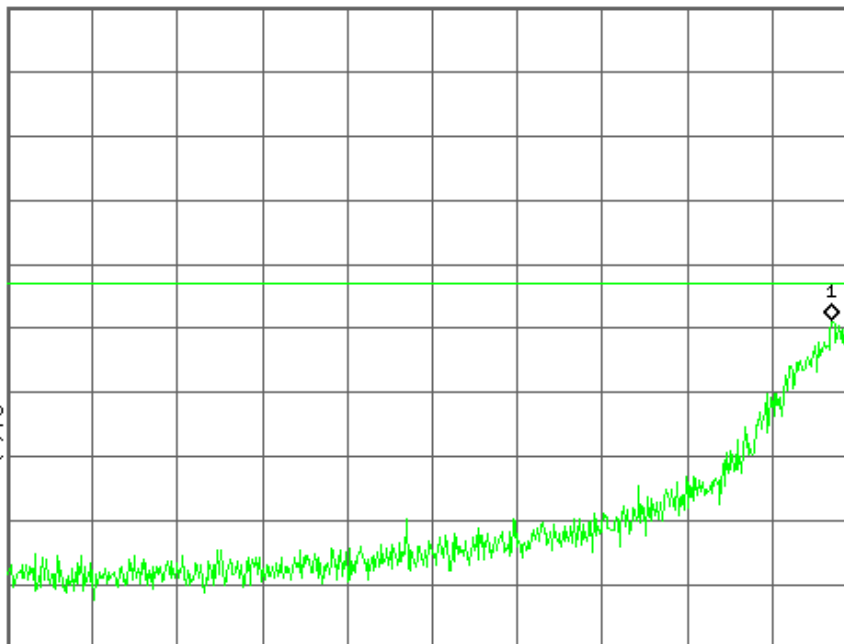

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz



Stop Freq
1.85000000 GHz


CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

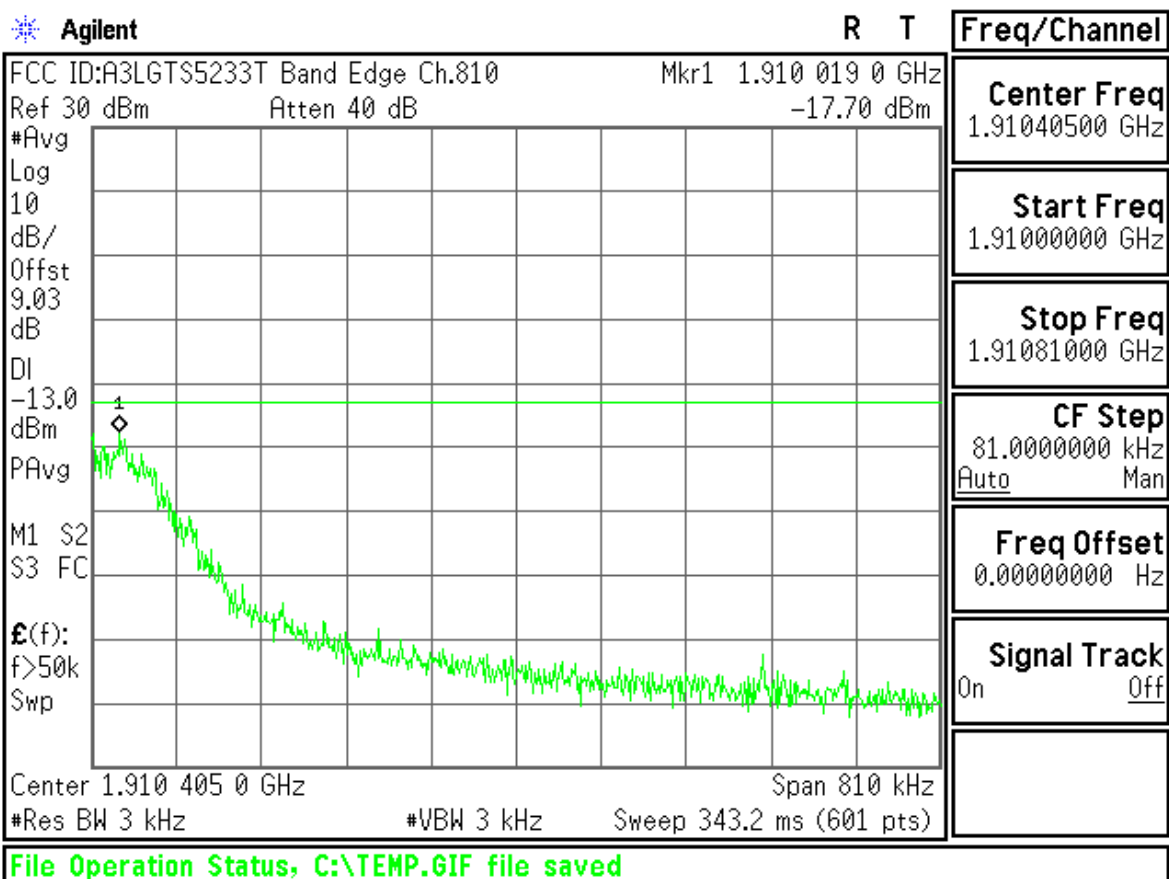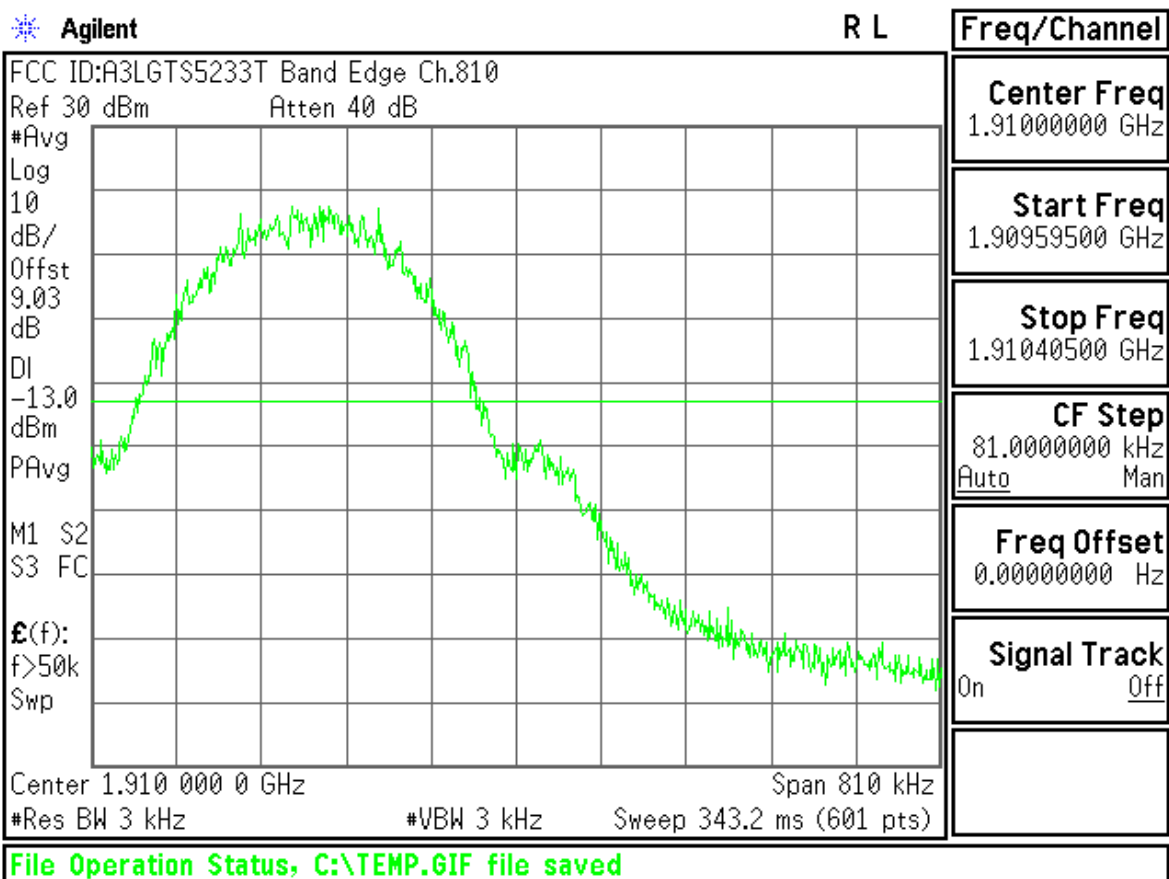

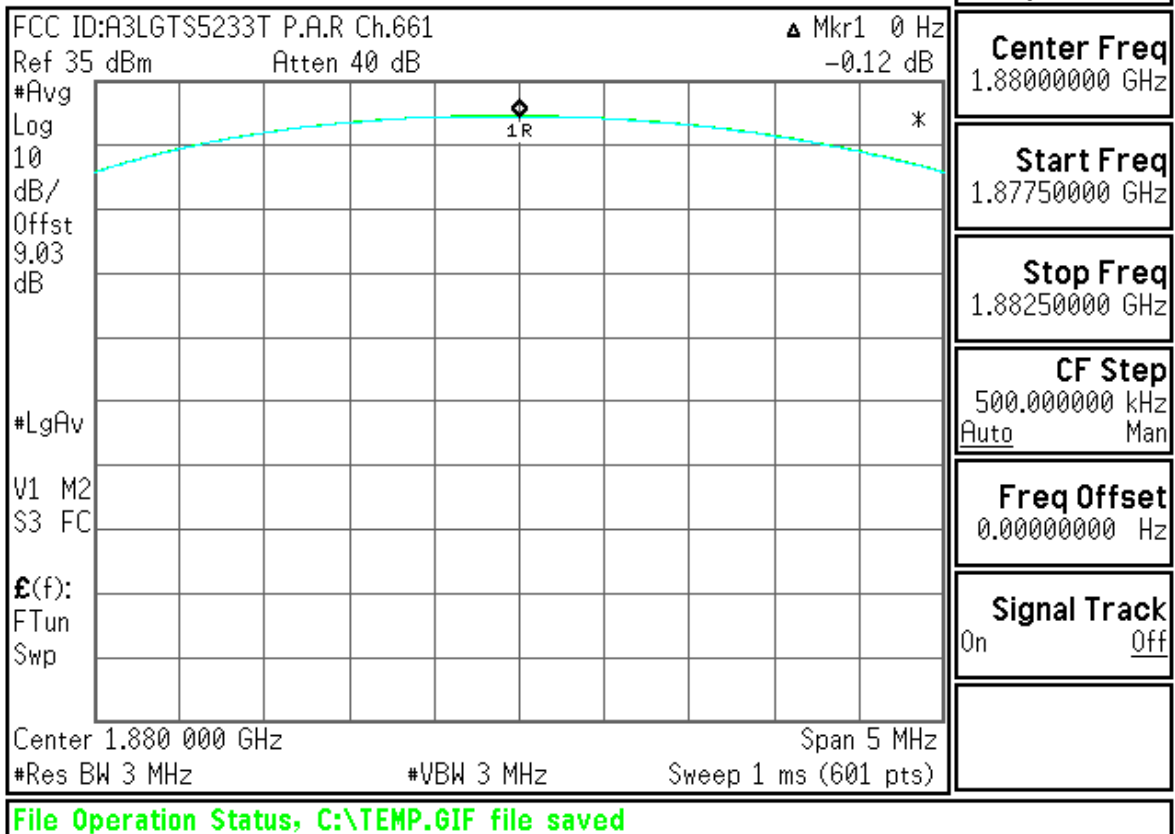

EDGE850



Agilent

R T

Freq/Channel

Ch Freq	824.2 MHz	Trig	Free
Occupied Bandwidth			

Center Freq
824.200000 MHz

Start Freq
823.700000 MHz

Stop Freq
824.700000 MHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55233T 0BW Ch.128 EDGE

Ref 27 dBm Atten 30 dB

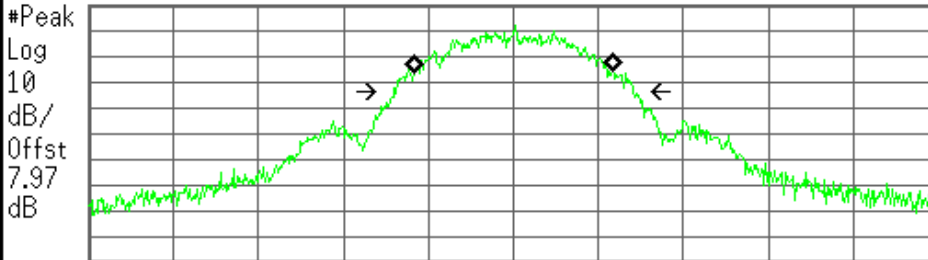

Center 824.200 MHz Span 1 MHz

#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
237.5586 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 59.344 Hz
x dB Bandwidth 285.913 kHz

File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

Ch Freq	836.6 MHz	Trig	Free
Occupied Bandwidth			

Center Freq
836.600000 MHz

Start Freq
836.100000 MHz

Stop Freq
837.100000 MHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55233T 0BW Ch.190 EDGE

Ref 27 dBm Atten 30 dB

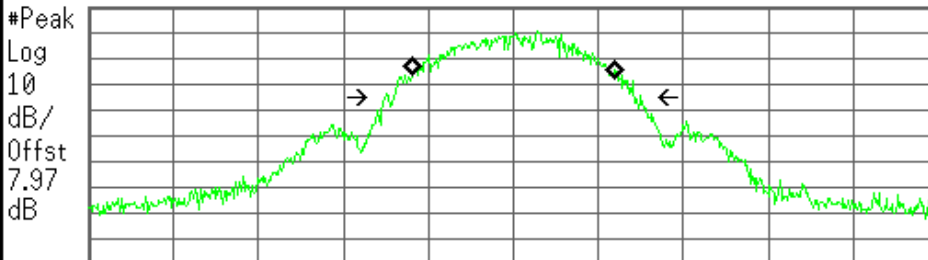

Center 836.600 MHz Span 1 MHz


#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
239.8075 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -340.928 Hz
x dB Bandwidth 305.891 kHz

File Operation Status, C:\TEMP.GIF file saved

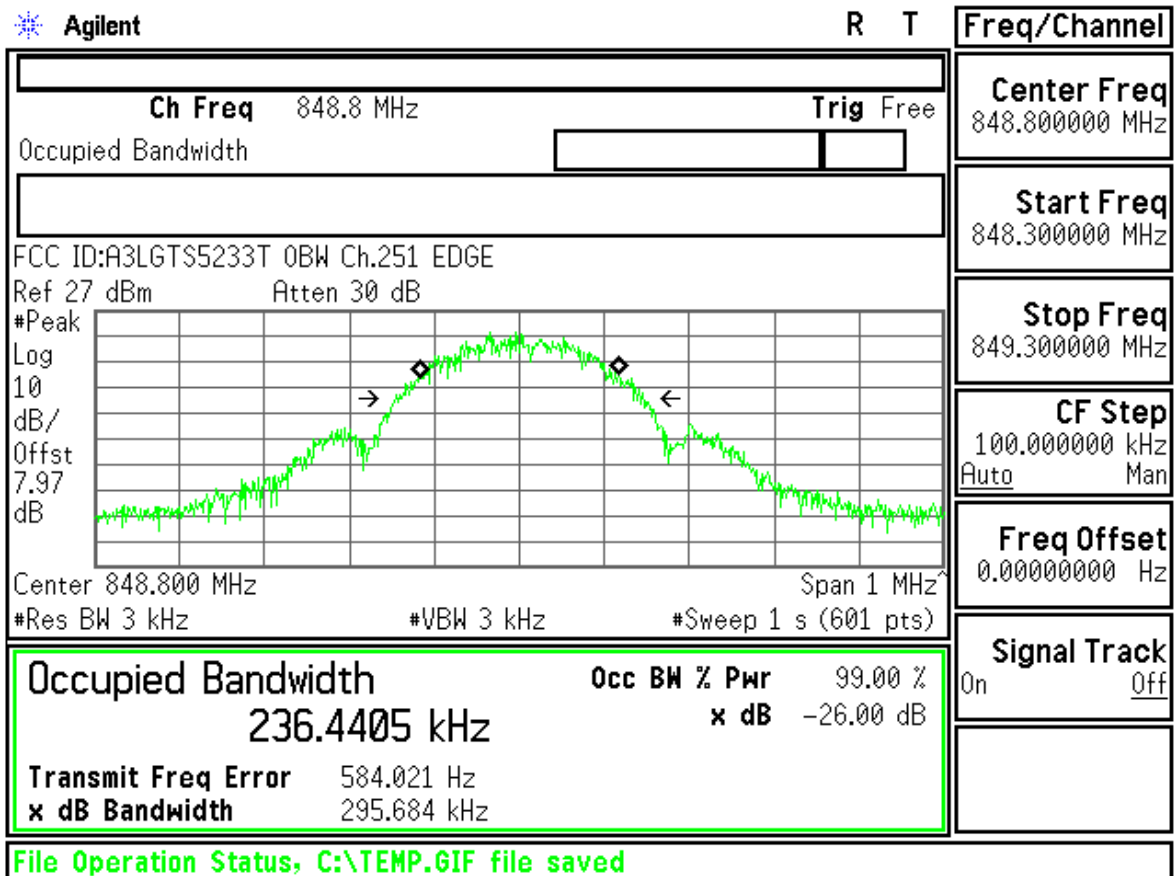

FCC ID : A3LGTS5233T Transmit Power 128CH EDGE

Control	EGPRS Transmit Power								PDCH Params								
EGPRS Transmit Power Setup ▾	EPSSK Burst Power				EPSSK Est Carrier Power				Downlink Traffic Power ▾								
	Minimum		Maximum		Minimum		Maximum		Traffic Band								
	25.15 dBm		26.35 dBm		25.73 dBm		25.80 dBm		GSM850								
	Average		Std Dev		Average		Std Dev		Traffic Channel								
	25.71 dBm		0.22 dBm		25.76 dBm		0.01 dBm		128								
	200 /200				Single												
									HS TX Level ▾								
									Modulation Coding Scheme ▾								
								Return									
		Active Cell Transferring				Sys Type: EGPRS											
1 of 2						IntRef		Offset		R T		Help				1 of 2	

elp; CALL:FUNCTION:DATA:START

Control	EGPRS Transmit Power								PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band		
	25.14 dBm	26.23 dBm		25.69 dBm	25.75 dBm			GSM850		
	Average	Std Dev		Average	Std Dev			Traffic Channel		
	25.65 dBm	0.22 dBm		25.71 dBm	0.01 dBm			190		
	200 / 200				Single					
									HS TX Level ▾	
									Modulation Coding Scheme ▾	
									Return	
			Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T	Help			1 of 2

elp; CALL:FUNCTION:DATA:START

Control	EGPRS Transmit Power								PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band		
	25.13 dBm	26.48 dBm		25.95 dBm	26.02 dBm			GSM850		
	Average	Std Dev		Average	Std Dev			Traffic Channel		
	25.90 dBm	0.25 dBm		25.98 dBm	0.01 dBm			251		
	200 / 200				Single					
									HS TX Level ▾	
									Modulation Coding Scheme ▾	
									Return	
			Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T	Help			1 of 2

elp; CALL:FUNCTION:DATA:START

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.128 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

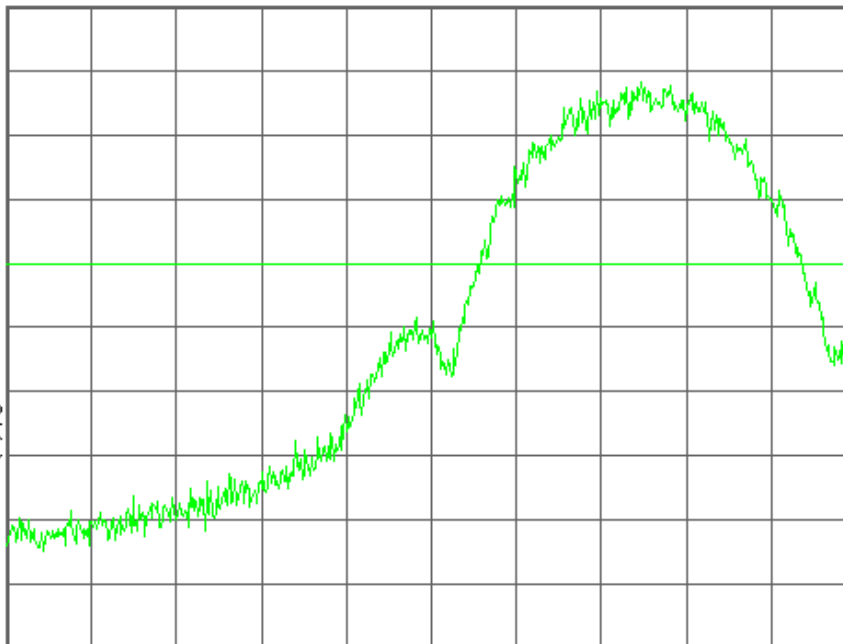

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.128 EDGE

Mkr1 823.986 6 MHz

Ref 27 dBm

Atten 30 dB

-21.20 dBm

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

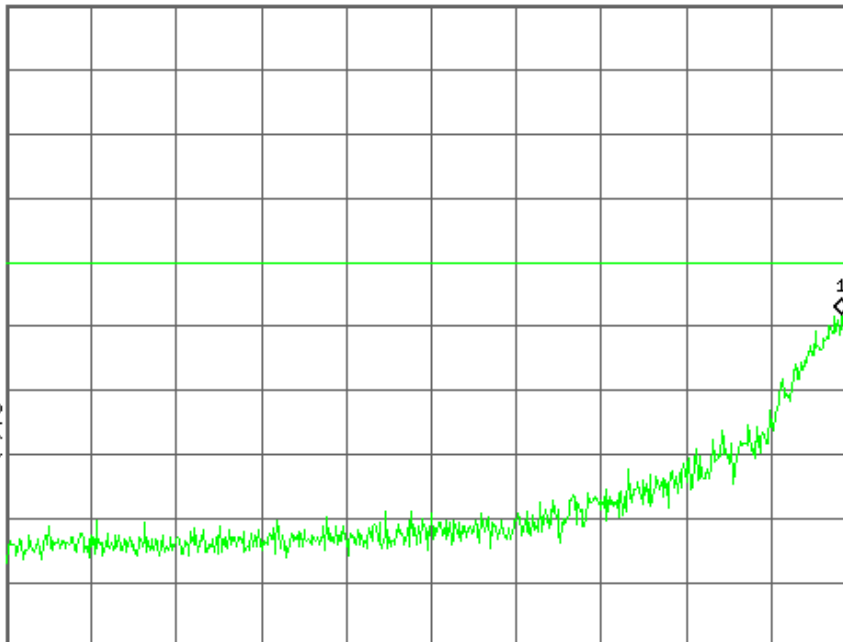

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.251 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

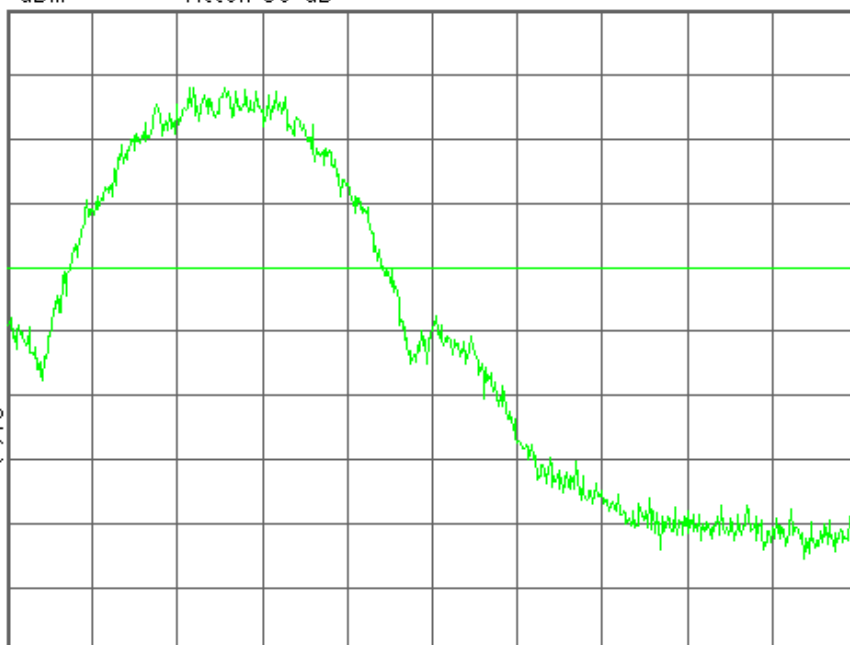

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.251 EDGE

Mkr1 849.006 7 MHz

Ref 27 dBm

Atten 30 dB

-20.30 dBm

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

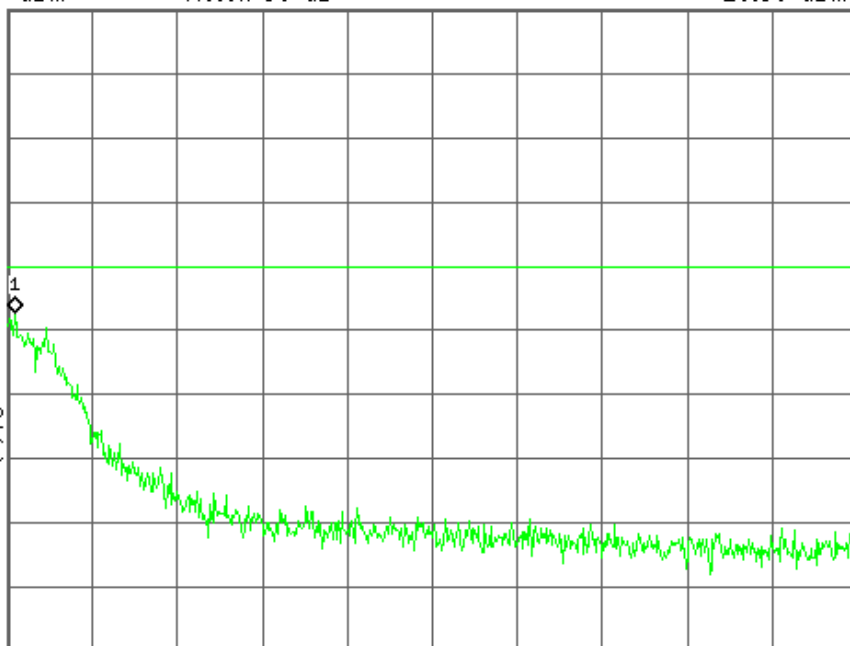

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

Ch Freq	1.8502 GHz	Trig	Free
Occupied Bandwidth			

Center Freq
1.85020000 GHz


Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

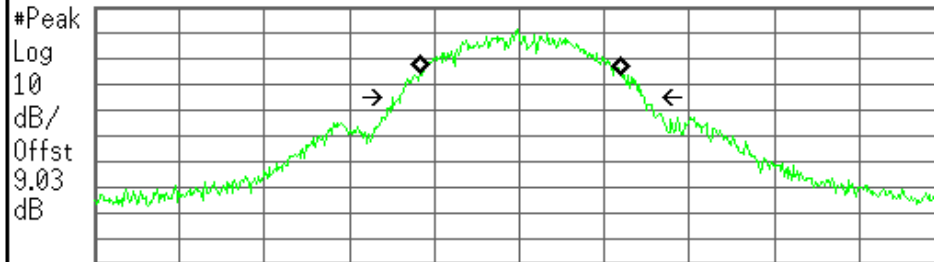FCC ID:A3LGT5233T 0BW Ch.512 EDGE
Ref 26 dBm Atten 30 dB


Center 1.850 200 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
237.8713 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.461 kHz
x dB Bandwidth 290.061 kHz

File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

Ch Freq	1.88 GHz	Trig	Free
Occupied Bandwidth			

Center Freq
1.88000000 GHz


Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

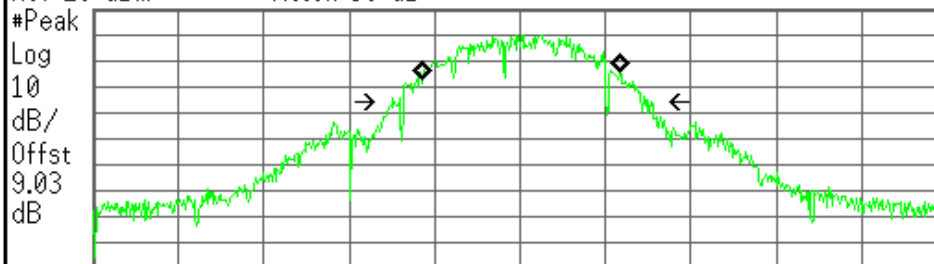FCC ID:A3LGT5233T 0BW Ch.661 EDGE
Ref 26 dBm Atten 30 dB


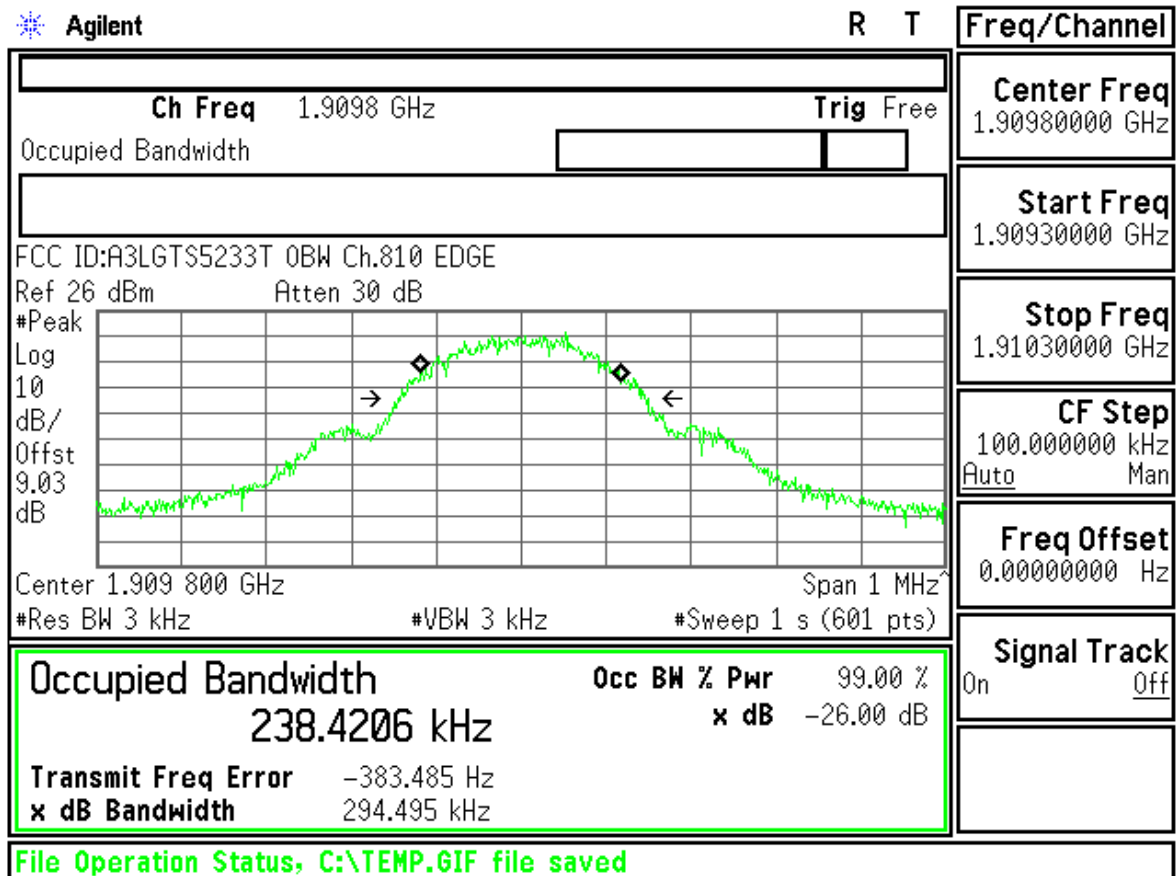
Center 1.880 000 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth
235.0229 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 407.378 Hz
x dB Bandwidth 306.298 kHz

File Operation Status, C:\TEMP.GIF file saved



FCC ID : A3LGTS5233T Transmit Power 512CH EDGE

Measurement/Instrument Screen												
Control		EGPRS Transmit Power							PDCH Params			
EGPRS Transmit Power Setup ▾		EPK Burst Power				EPK Est Carrier Power			Downlink Traffic Power ▾			
		Minimum		Maximum		Minimum		Maximum	Traffic Band			
		24.25 dBm		25.48 dBm		24.85 dBm		24.92 dBm	PCS			
		Average		Std Dev		Average		Std Dev	Traffic Channel			
		24.85 dBm		0.24 dBm		24.89 dBm		0.01 dBm	512			
		200 / 200							Single			
											HS TX Level ▾	
									Modulation Coding Scheme ▾			
									Return			
		Active Cell Transferring				Sys Type: EGPRS						
1 of 2						IntRef	Offset	R T	Help		1 of 2	
Help; CALL:FUNCTION:DATA:START												

Help; CALL:FUNCTION:DATA:START

Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Parms		
EGPRS Transmit Power Setup ▾	EPSK Burst Power			EPSK Est Carrier Power			Downlink Traffic Power ▾		
	Minimum	Maximum		Minimum	Maximum		Traffic Band		
	24.29 dBm	25.60 dBm		24.98 dBm	25.04 dBm		PCS		
	Average	Std Dev		Average	Std Dev		Traffic Channel		
	24.94 dBm	0.24 dBm		25.01 dBm	0.01 dBm		661		
	200 / 200				Single				
							HS TX Level ▾		
							Modulation Coding Scheme ▾		
							Return		
			Active Cell Transferring			Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T	Help		1 of 2
Help; CALL:FUNCTION:DATA:START									

Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Parms		
EGPRS Transmit Power Setup ▾	EPSK Burst Power			EPSK Est Carrier Power			Downlink Traffic Power ▾		
	Minimum	Maximum		Minimum	Maximum		Traffic Band		
	24.50 dBm	25.77 dBm		25.26 dBm	25.34 dBm		PCS		
	Average	Std Dev		Average	Std Dev		Traffic Channel		
	25.24 dBm	0.25 dBm		25.30 dBm	0.01 dBm		810		
	200 / 200				Single				
							HS TX Level ▾		
							Modulation Coding Scheme ▾		
							Return		
			Active Cell Transferring			Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T	Help		1 of 2
Help; CALL:FUNCTION:DATA:START									

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

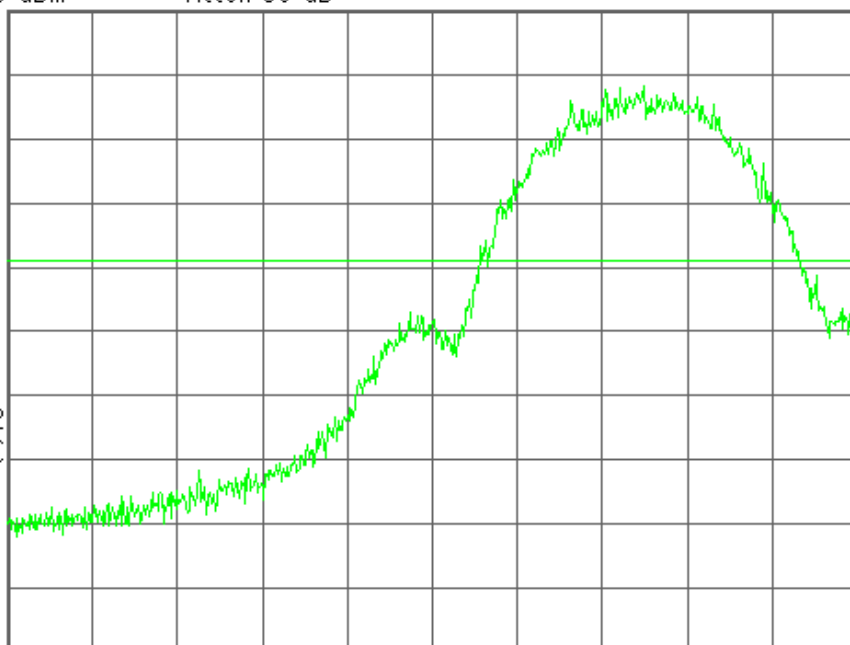

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5233T Band Edge Ch.512 EDGE

Mkr1 1.849 993 3 GHz

Ref 26 dBm

Atten 30 dB

-20.95 dBm

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

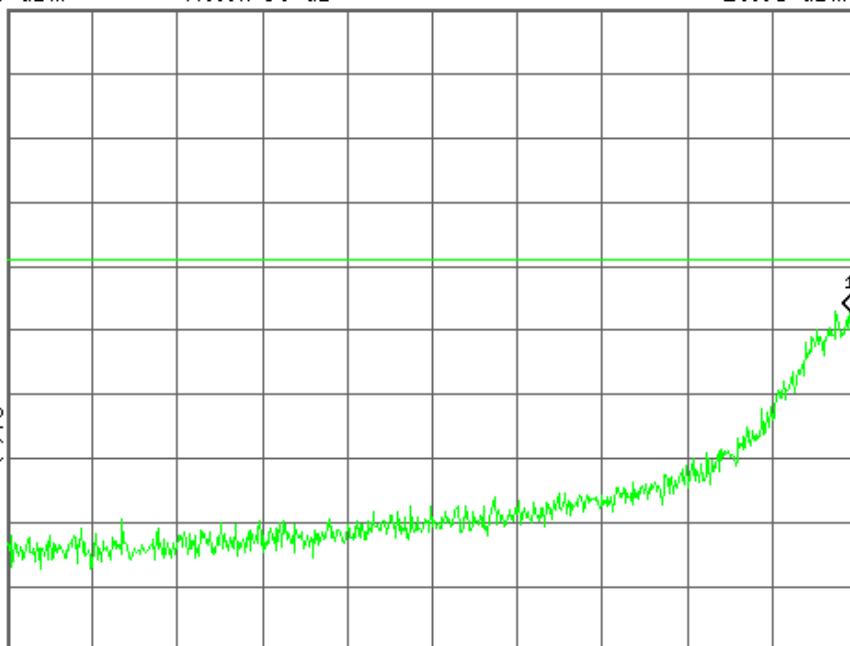

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz



Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

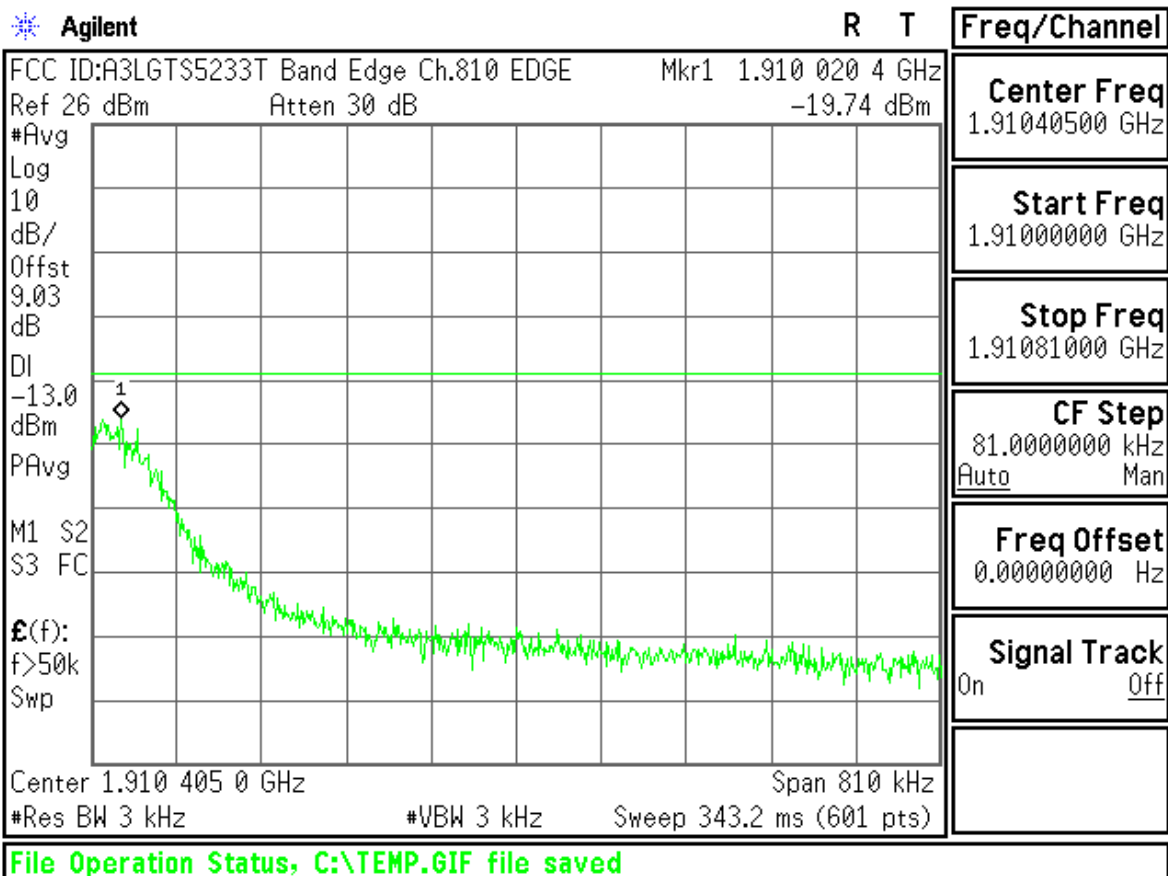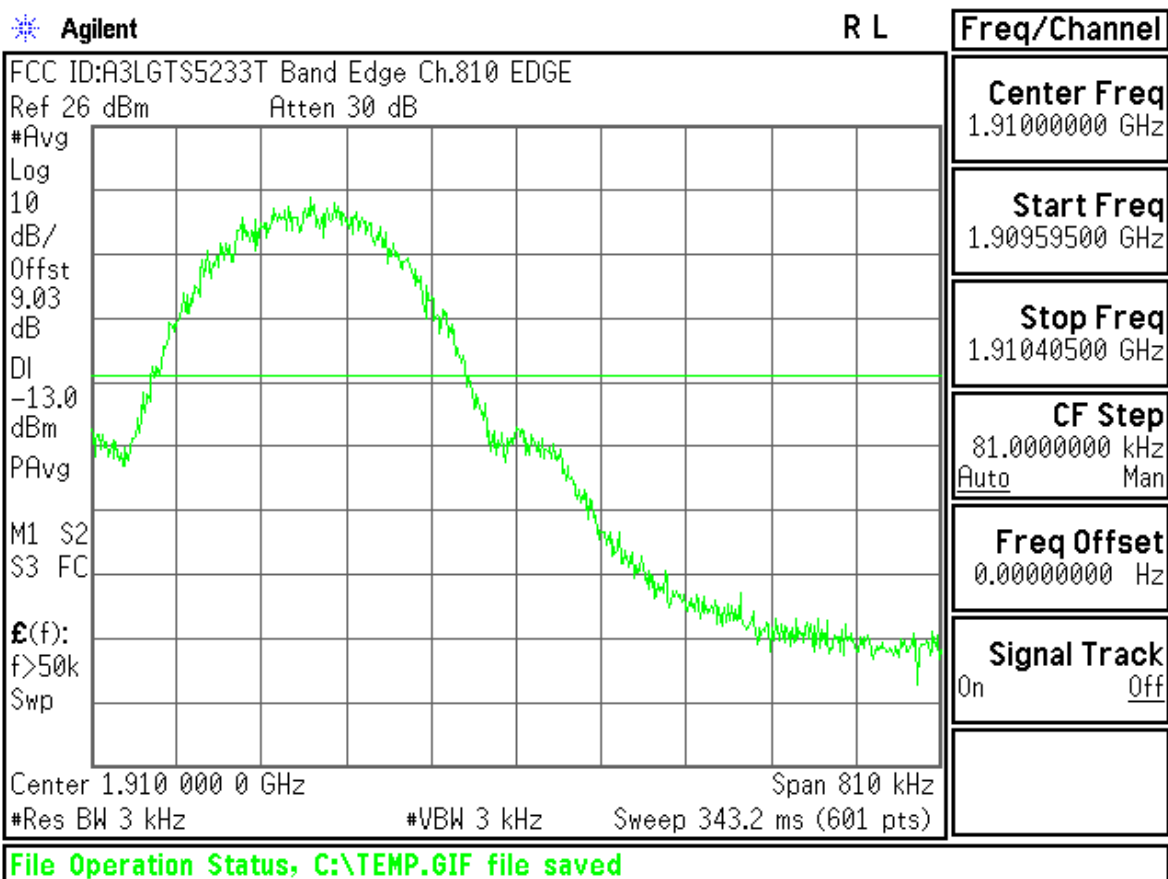

Agilent

R L

Freq/Channel

FCC ID:A3LGT55233T P.A.R Ch.661

▲ Mkr1 0 Hz

Ref 35 dBm

Atten 40 dB

-0.09 dB

#Avg

Log

10

dB/

Offst

9.03

dB

#LgAv

100


V1 M2

S3 FC

£(f):

FTun

Swp

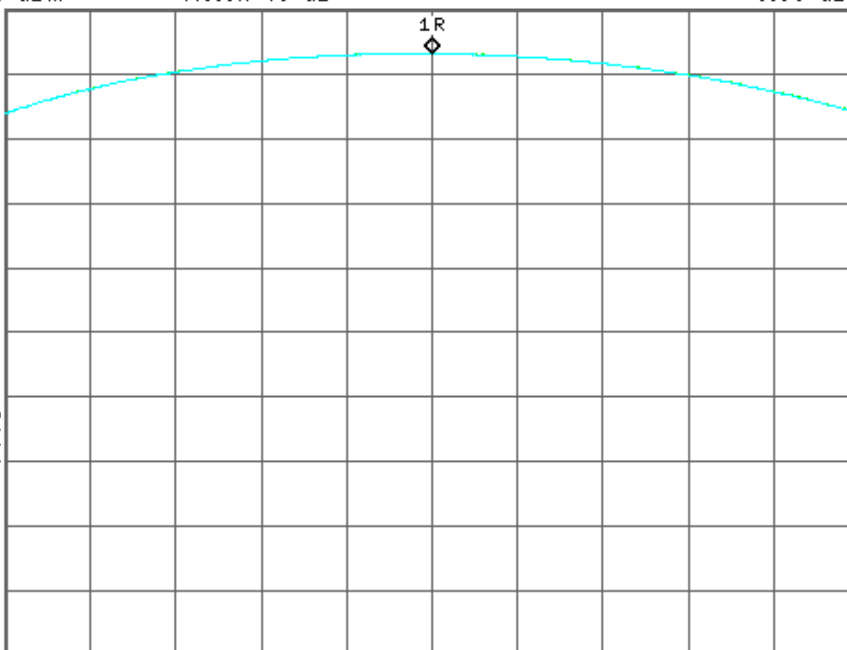

Center 1.880 050 GHz

Span 5 MHz

#Res BW 3 MHz

#VBW 3 MHz

#Sweep 1 ms (601 pts)

Center Freq
1.88005000 GHz

Start Freq
1.87755000 GHz

Stop Freq
1.88255000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2005 Agilent Technologies