



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S5830i
FCC ID (Requested) : A3LGTS5830I
Report No : FI-268-R1
Job No : FI-268
Date issued : November 7, 2011

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

HK LEE – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)	16
6.4. GSM850 Radiated Spurious & Harmonic measurement	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph	25
7. CONCLUSION	27
8. TEST PLOTS	28



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS5830I
- Model : GT-S5830i
- Quantity : Quantity production is planned
- Emission Designators : 248KGXW(GSM850)
247KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.344 W ERP GSM850 (25.37 dBm)
1.445 W EIRP GSM1900 (31.60 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx
only and WLAN
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : October 18-19, 2011
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FI-268-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.

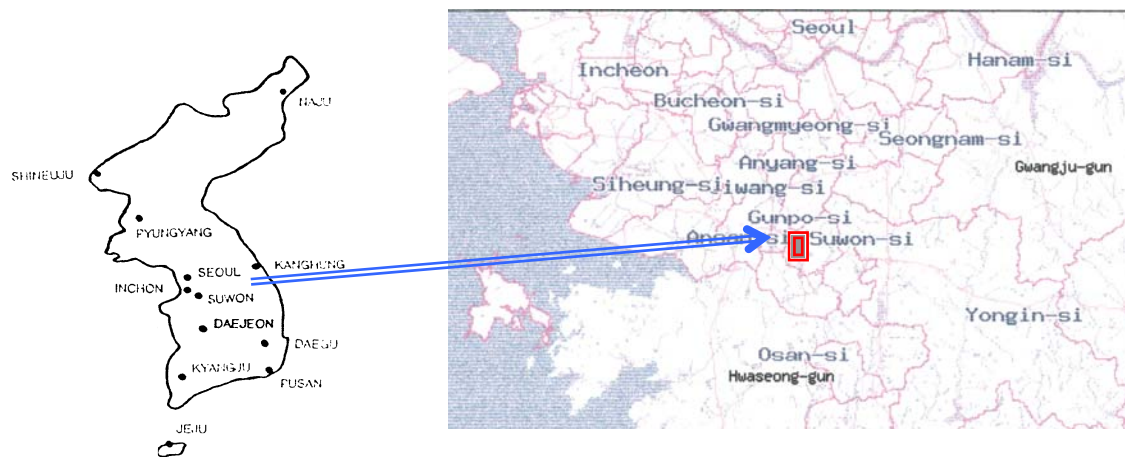


Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2012-10-25
	E4440A(3Hz~26.5GHz)	MY46187454	2012-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2012-04-27
Network Analyzer	8753E	JP38160590	2012-06-21
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2012-03-08
	8960	GB42230535	2011-12-23
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2013-09-05
	BBHA9120	9120D-636	2012-07-14
Dipole Antenna	UHA 9105	9105-2412	2013-09-09
	UHA 9105	9105-2413	2012-07-15
Receive Antenna	HL040	353255/019	2013-09-05
Power Supply	E3640A	MY40003594	2012-06-21
	E3640A	MY40003595	2012-05-27
	E3632A	MY40022438	2012-03-08
Divider	11636B	51946	2012-07-04
	11636B	51942	2012-07-05
	11636B	56918	2012-09-28
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

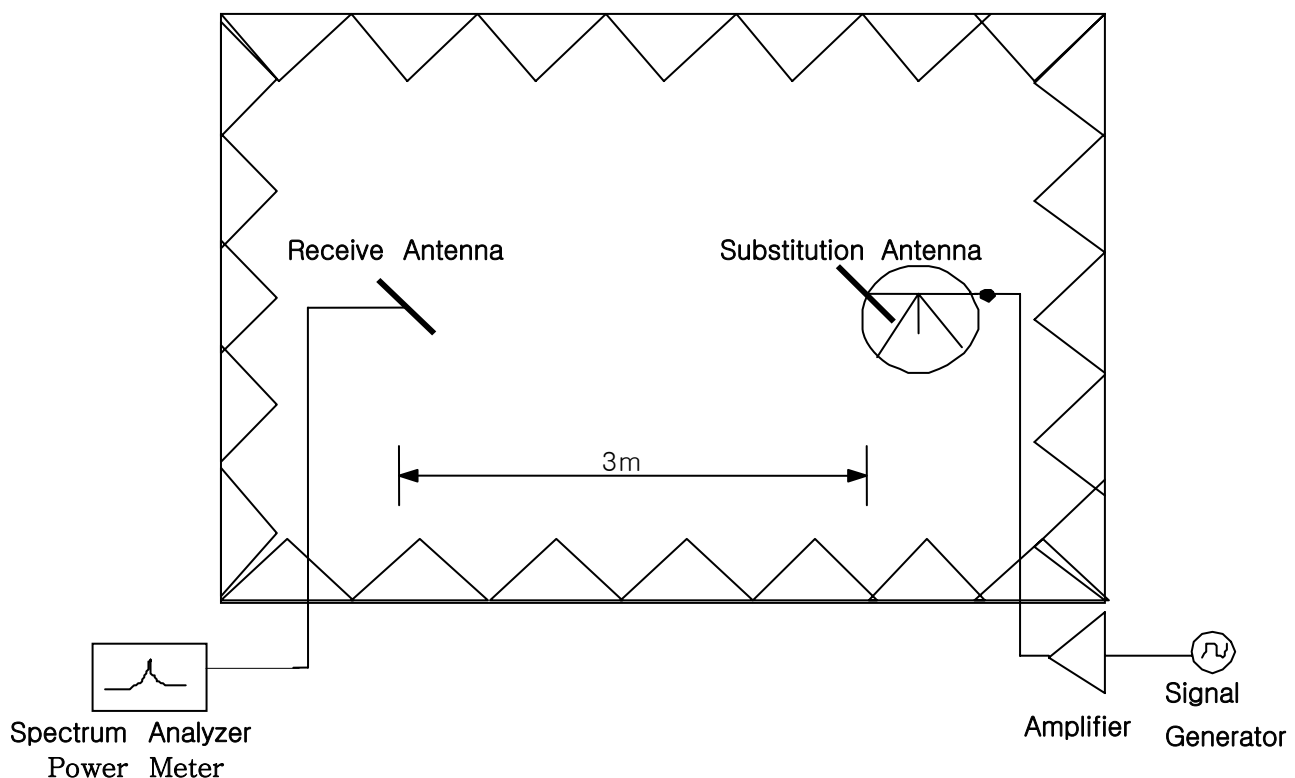


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

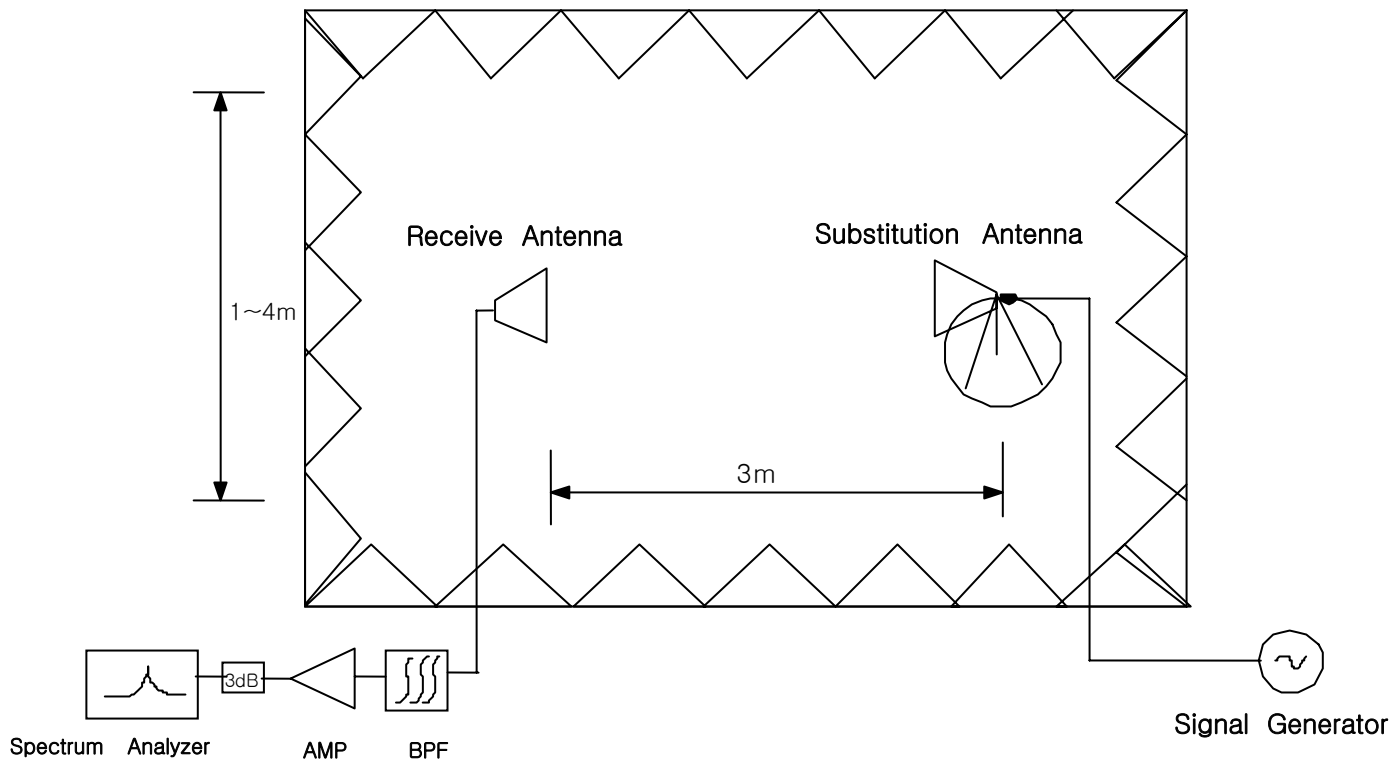


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.344 \text{ W}) = 38.37 \text{ dB}$$

$$25.37 \text{ dBm} - 38.37 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

Example)

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$

A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx only and WLAN FCC ID: A3LGTS5830I. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS BAND and "5" in the Cellular Band. The GSM conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.22	29.22	27.86	25.82	23.83
	661	29.24	29.18	27.85	25.83	23.86
	810	29.48	29.4	28.12	26.07	24.11
Cellular	128	32.45	32.34	30.83	28.82	26.86
	190	32.25	32.19	30.69	28.7	26.76
	251	32.1	32.1	30.57	28.57	26.62

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	25.00	H	-12.56	-0.67	-11.89
		V	-13.38	-0.67	-12.71
836.60	24.00	H	-14.03	-0.73	-13.30
		V	-14.32	-0.73	-13.59
848.80	25.00	H	-15.19	-0.79	-14.40
		V	-14.40	-0.79	-13.61

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-12.33	H	284/100	24.56	0.286	Standard
836.60	-13.10	H	284/100	24.20	0.263	Standard
848.80	-14.03	H	76/55	25.37	0.344	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	30.00	H	-9.32	9.60	-18.92
		V	-8.91	9.60	-18.51
1880.00	32.00	H	-6.95	9.60	-16.55
		V	-7.32	9.60	-16.92
1909.80	31.00	H	-8.49	9.60	-18.09
		V	-8.17	9.60	-17.77

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-18.57	V	121/80	29.94	0.986	Standard
1880.00	-17.32	V	214/90	31.60	1.445	Standard
1909.80	-17.71	V	209/80	31.06	1.276	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 25.37 dBm = 0.344 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 38.37 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-61.37	H	72.62
	3	2472.60	-65.73	H	71.74
	4	3296.80	-63.03	H	65.93
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-56.04	V	67.81
	3	2509.80	-65.50	H	71.30
	4	3346.40	-61.34	H	64.23
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-53.83	V	64.36
	3	2546.40	-65.28	H	71.63
	4	3395.20	-61.83	H	64.21
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 31.60 dBm = 1.445 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 44.6$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-67.80	H	69.15
	3	5550.60	-66.87	H	64.80
	4	7400.80	-68.47	V	61.24
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-67.67	H	69.11
	3	5640.00	-67.72	H	65.31
	4	7520.00	-68.75	H	61.32
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-66.98	V	68.76
	3	5729.40	-67.89	H	65.02
	4	7639.20	-69.18	H	62.26
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : October 19, 2011

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-8.77	9.40	-13.60	-27.73	-27.03	-61.37	-61.13	72.62	73.08
	3	2472.60	-11.12	10.60	-12.50	-32.97	-32.23	-65.73	-68.05	71.74	74.80
	4	3296.80	-12.19	12.00	-12.80	-36.08	-36.84	-63.03	-64.04	65.93	66.18
	5	4121.00	-13.85	12.60	-11.80	-39.75	-39.33	-	-	-	-
	6	4945.20	-15.03	12.70	-10.70	-42.44	-42.28	-	-	-	-
	7	5769.40	-17.11	13.10	-9.00	-44.12	-44.43	-	-	-	-
190	2	1673.20	-8.83	9.40	-13.60	-27.98	-27.21	-57.31	-56.04	68.31	67.81
	3	2509.80	-11.24	10.60	-12.40	-33.18	-32.42	-65.50	-65.37	71.30	71.93
	4	3346.40	-12.13	12.00	-12.90	-36.09	-36.75	-61.34	-63.72	64.23	65.95
	5	4183.00	-14.18	12.60	-11.40	-39.47	-39.56	-	-	-	-
	6	5019.60	-15.91	12.70	-9.80	-42.07	-42.44	-	-	-	-
	7	5856.20	-17.15	13.10	-9.00	-45.07	-44.94	-	-	-	-
251	2	1697.60	-8.88	9.40	-13.50	-29.26	-28.45	-55.79	-53.83	65.51	64.36
	3	2546.40	-11.22	10.60	-12.40	-32.63	-32.85	-65.28	-65.59	71.63	71.72
	4	3395.20	-12.28	12.00	-12.70	-36.60	-36.89	-61.83	-64.56	64.21	66.65
	5	4244.00	-14.15	12.60	-11.50	-39.36	-39.77	-	-	-	-
	6	5092.80	-16.16	12.70	-9.50	-42.73	-42.38	-	-	-	-
	7	5941.60	-17.34	13.10	-8.80	-45.37	-45.34	-	-	-	-

6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : October 19, 2011

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-12.85	12.60	-12.80	-39.98	-39.03	-67.80	-67.94	69.15	70.24
	3	5550.60	-16.92	12.50	-8.60	-43.40	-42.99	-66.87	-66.80	64.80	65.14
	4	7400.80	-20.20	11.50	-4.30	-48.71	-48.56	-69.03	-68.47	61.65	61.24
	5	9251.00	-23.05	11.90	-1.90	-53.11	-52.12	-	-	-	-
	6	11101.20	-25.08	11.50	0.60	-57.75	-54.90	-	-	-	-
	7	12951.40	-28.10	14.42	0.70	-61.50	-58.01	-	-	-	-
661	2	3760.00	-13.35	12.60	-12.30	-39.89	-39.16	-67.67	-67.97	69.11	70.14
	3	5640.00	-17.07	12.50	-8.40	-43.74	-43.42	-67.72	-67.49	65.31	65.40
	4	7520.00	-20.60	11.50	-3.90	-48.76	-48.06	-68.75	-68.47	61.32	61.74
	5	9400.00	-23.50	11.90	-1.40	-52.65	-51.24	-	-	-	-
	6	11280.00	-26.24	11.50	1.70	-56.66	-54.54	-	-	-	-
	7	13160.00	-28.79	14.42	1.40	-61.01	-57.76	-	-	-	-
810	2	3819.60	-13.30	12.60	-12.30	-39.95	-39.55	-67.54	-66.98	68.92	68.76
	3	5729.40	-17.16	12.50	-8.30	-44.20	-43.35	-67.89	-67.44	65.02	65.42
	4	7639.20	-20.88	11.50	-3.60	-48.25	-47.92	-69.18	-68.88	62.26	62.29
	5	9549.00	-24.09	11.90	-0.80	-52.88	-51.48	-	-	-	-
	6	11458.80	-26.05	11.50	1.60	-57.49	-54.67	-	-	-	-
	7	13368.60	-28.74	14.42	1.30	-63.03	-59.49	-	-	-	-

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-31.30	836,599,969	-0.000004	-0.037
100%		-30	40.00	836,600,040	0.000005	0.048
100%		-20	42.60	836,600,043	0.000005	0.051
100%		-10	-45.00	836,599,955	-0.000005	-0.054
100%		0	15.60	836,600,016	0.000002	0.019
100%		+10	-47.10	836,599,953	-0.000006	-0.056
100%		+20	-31.30	836,599,969	-0.000004	-0.037
100%		+30	46.30	836,600,046	0.000006	0.055
100%		+40	2.20	836,600,002	0.000000	0.003
100%		+50	-5.10	836,599,995	-0.000001	-0.006
85%	3.15	+20	N/A	N/A	N/A	N/A
115%	4.26	+20	-22.80	836,599,977	-0.000003	-0.027
Batt.Endpoint	3.35	+20	-15.40	836,599,985	-0.000002	-0.018


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

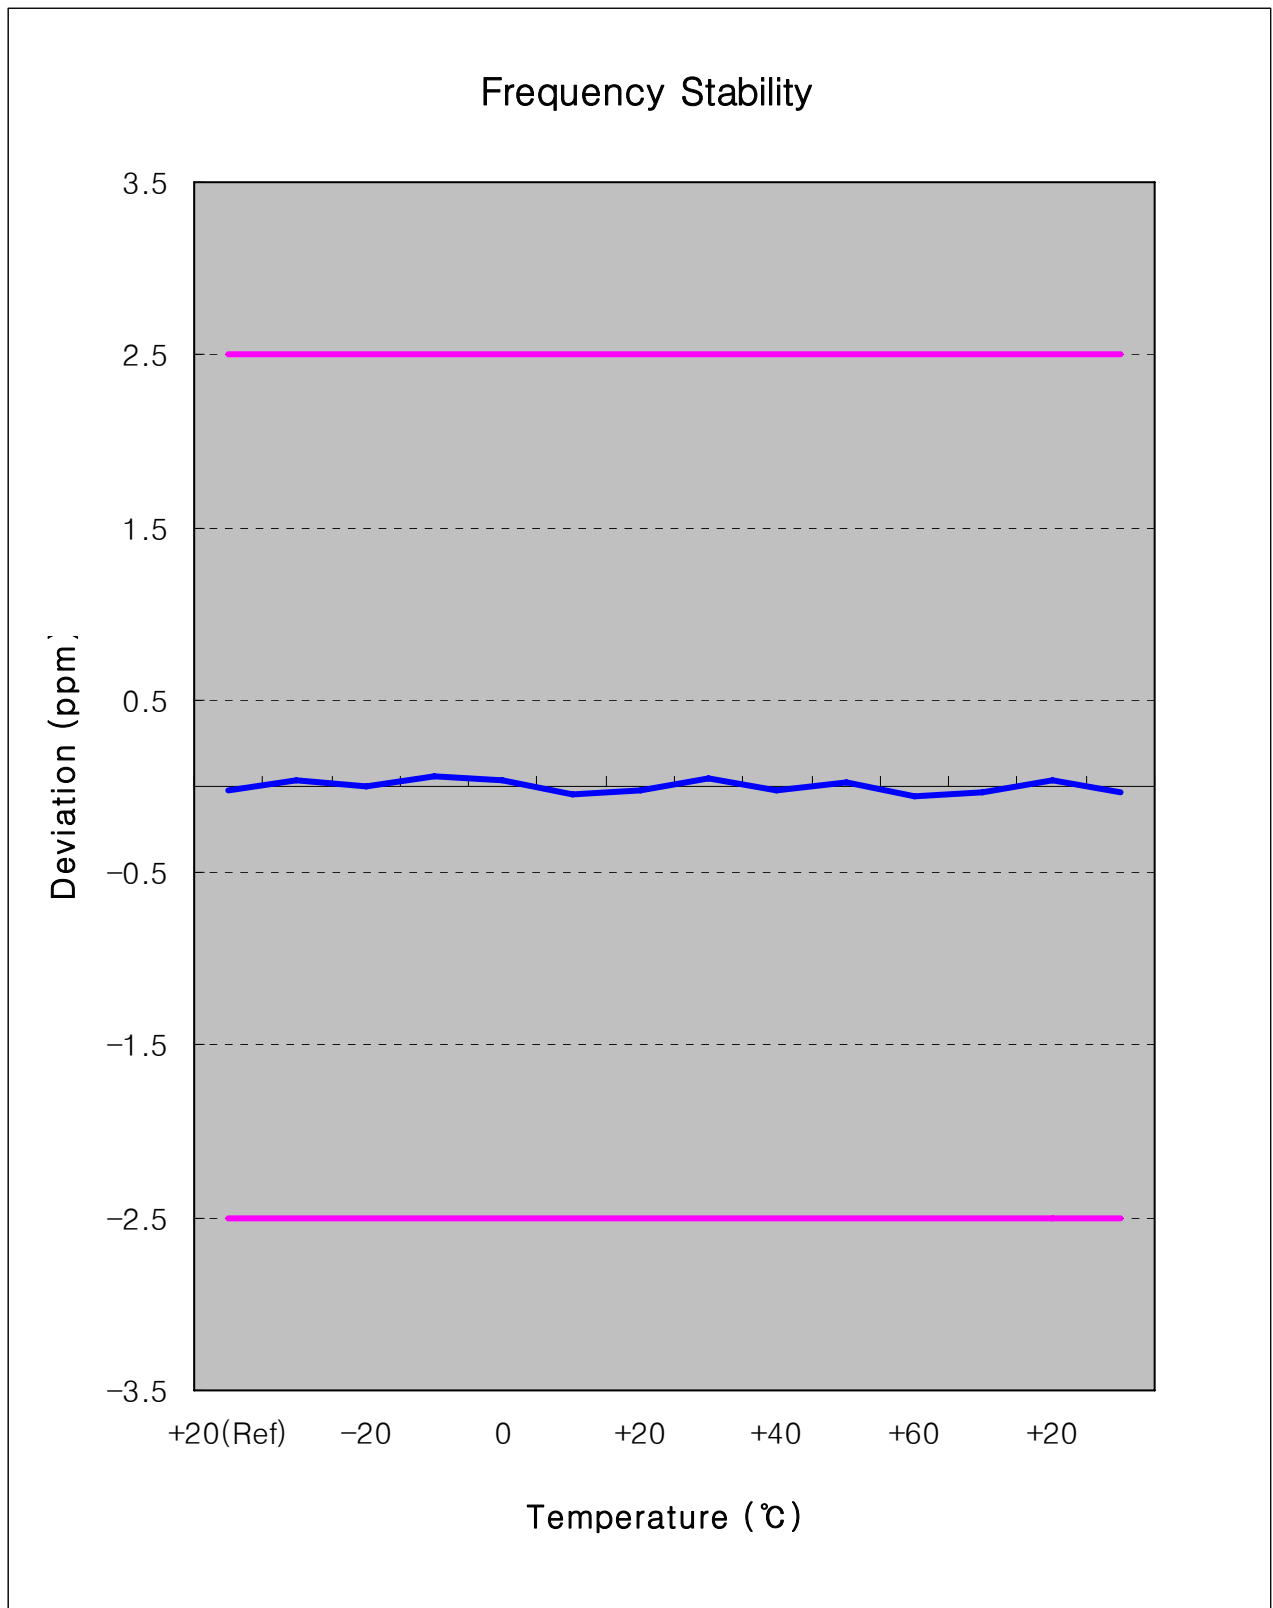

Zoom IN

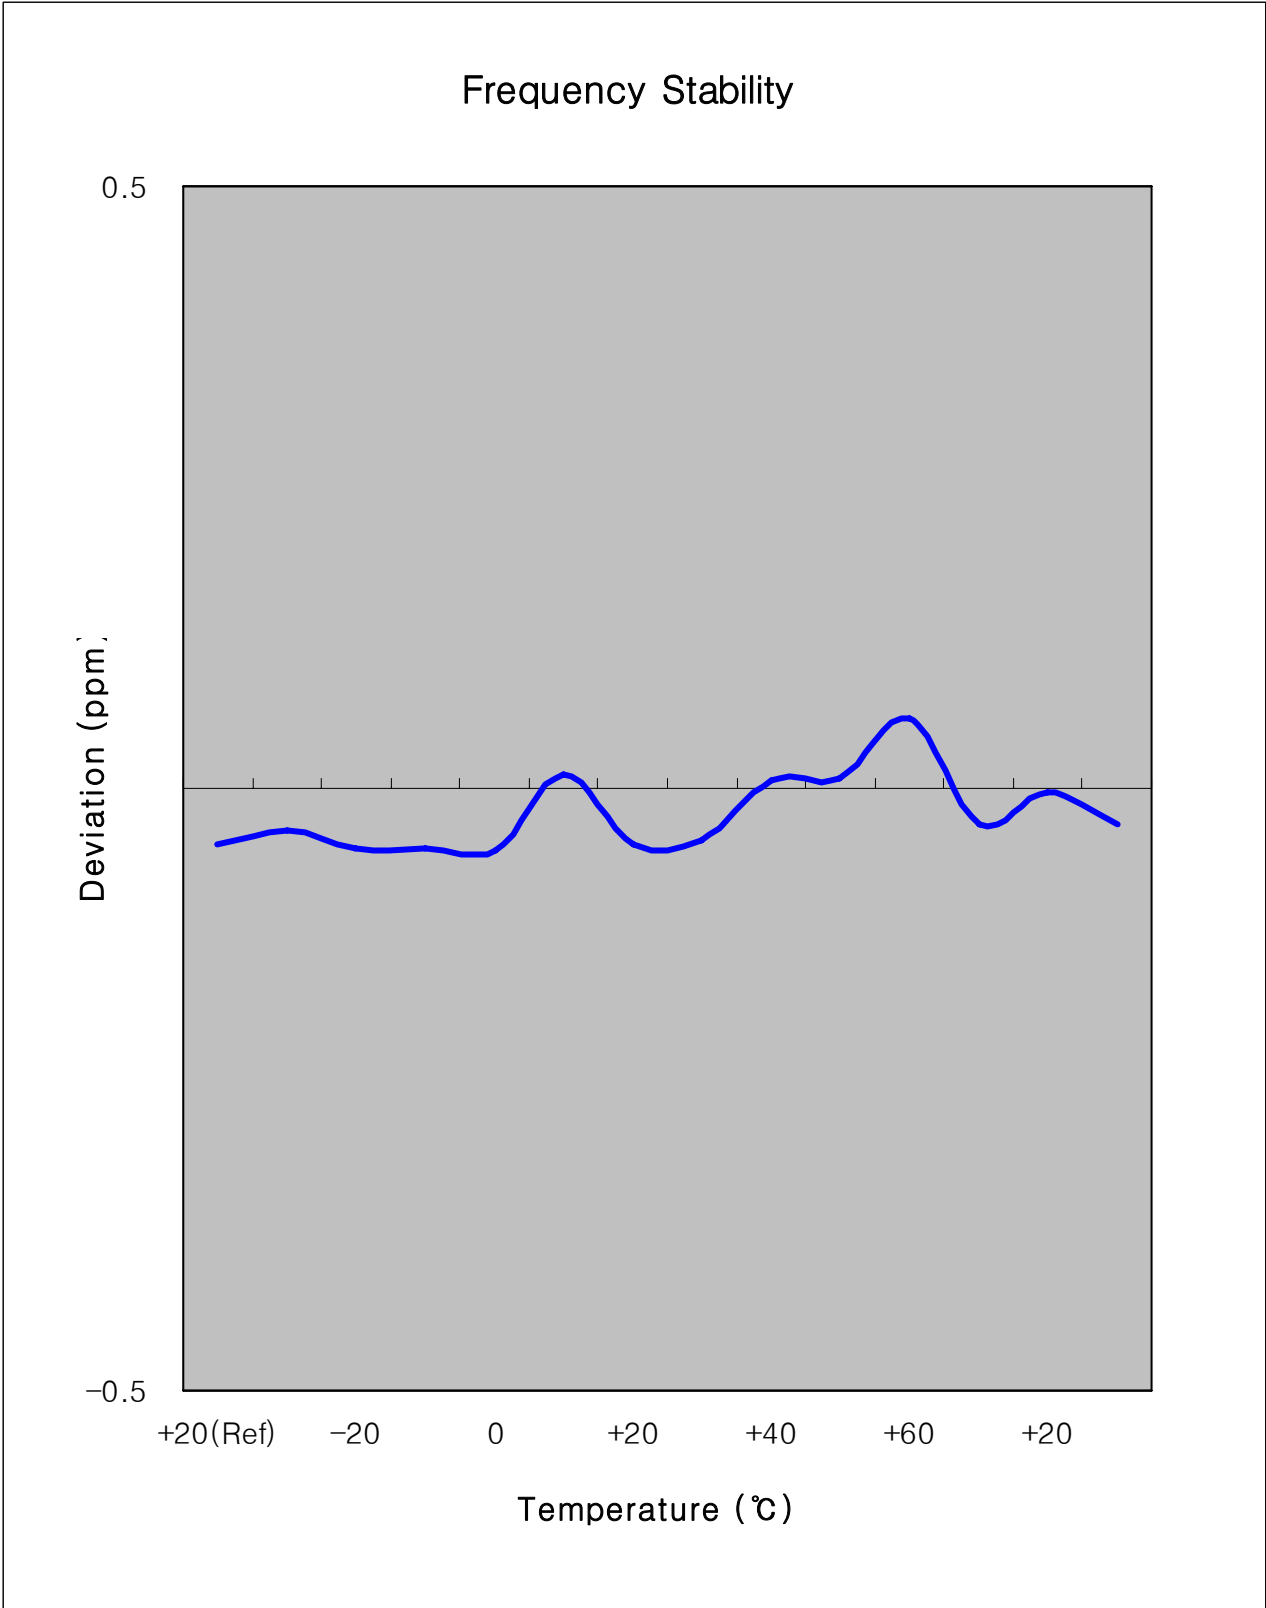

6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-27.10	1,879,999,973	-0.000001	-0.014
100%		-30	11.30	1,880,000,011	0.000001	0.006
100%		-20	22.20	1,880,000,022	0.000001	0.012
100%		-10	31.70	1,880,000,032	0.000002	0.017
100%		0	-1.90	1,879,999,998	0.000000	-0.001
100%		+10	38.80	1,880,000,039	0.000002	0.021
100%		+20	-27.10	1,879,999,973	-0.000001	-0.014
100%		+30	2.80	1,880,000,003	0.000000	0.001
100%		+40	18.00	1,880,000,018	0.000001	0.010
100%		+50	49.20	1,880,000,049	0.000003	0.026
85%	3.15	N/A	N/A	N/A	N/A	N/A
115%	4.26	+20	18.60	1,880,000,019	0.000001	0.010
Batt.Endpoint	3.35	+20	-29.40	1,879,999,971	-0.000002	-0.016


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

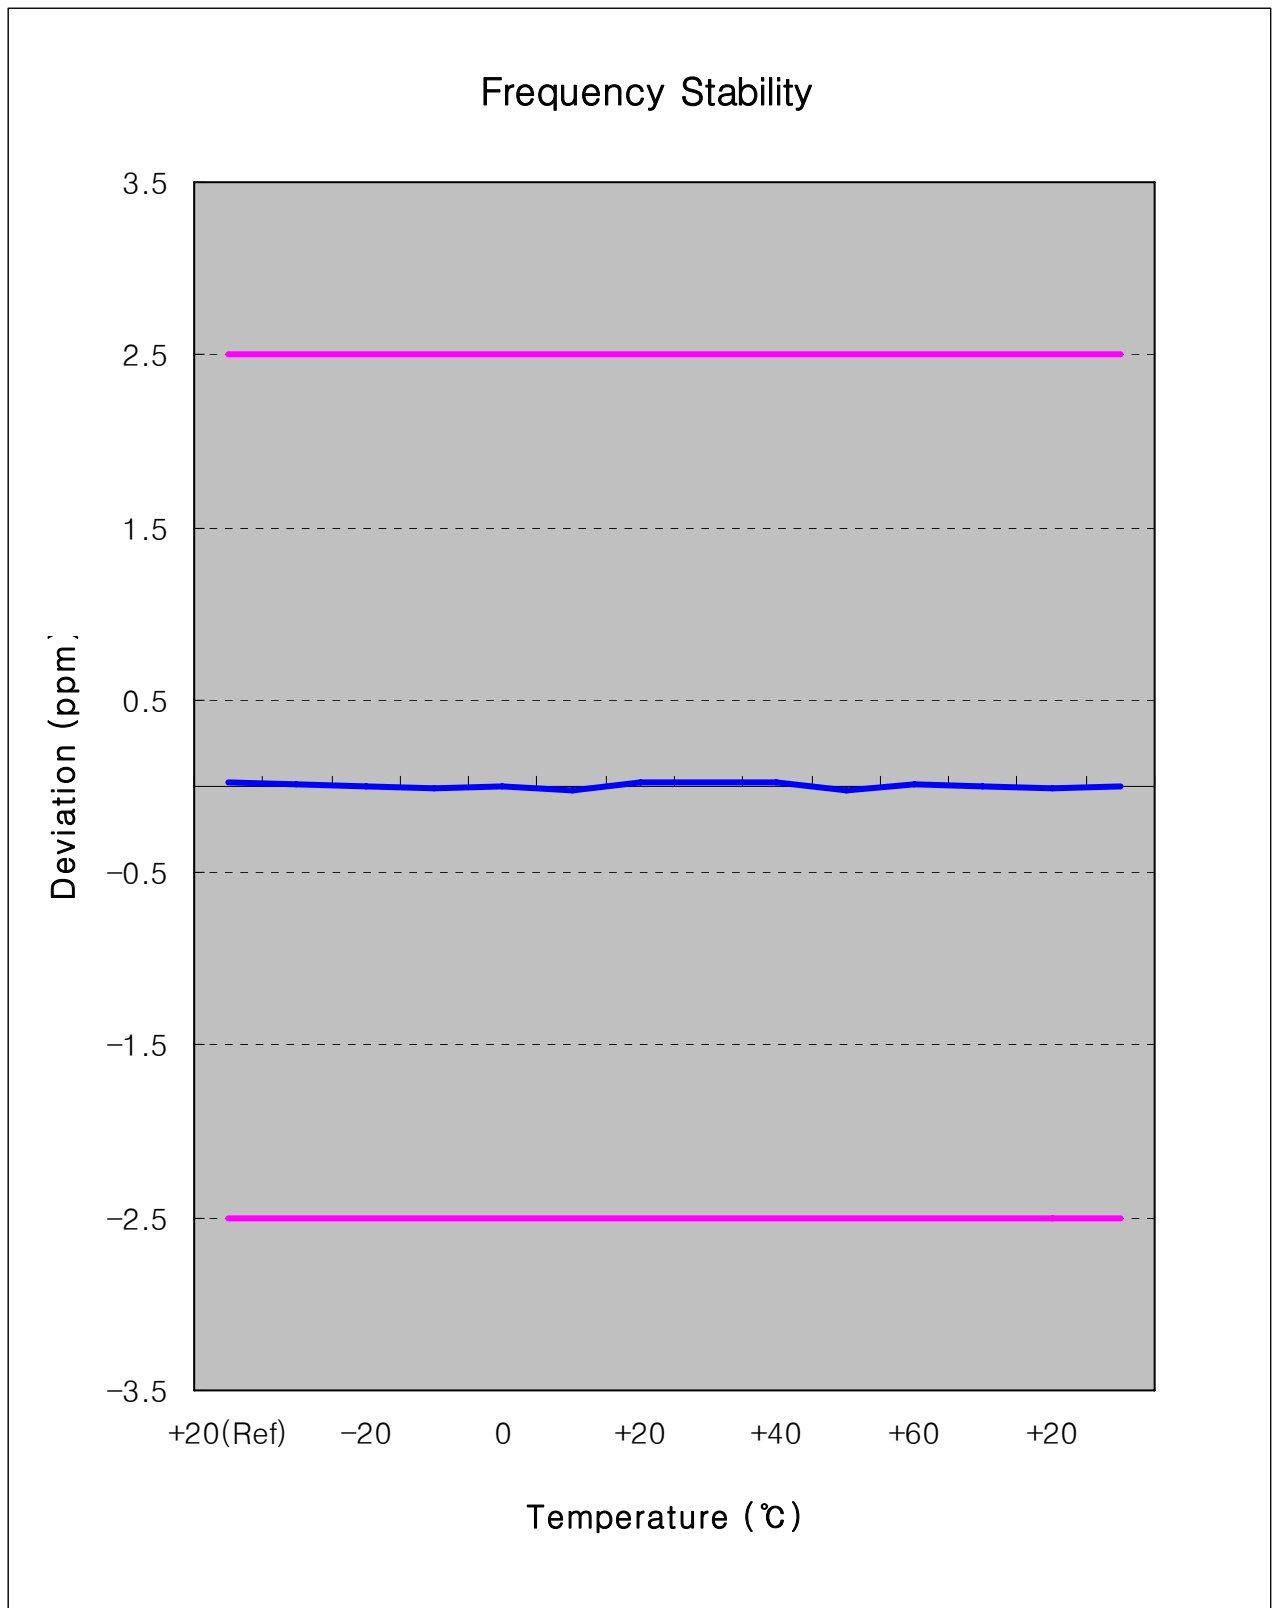

Zoom IN

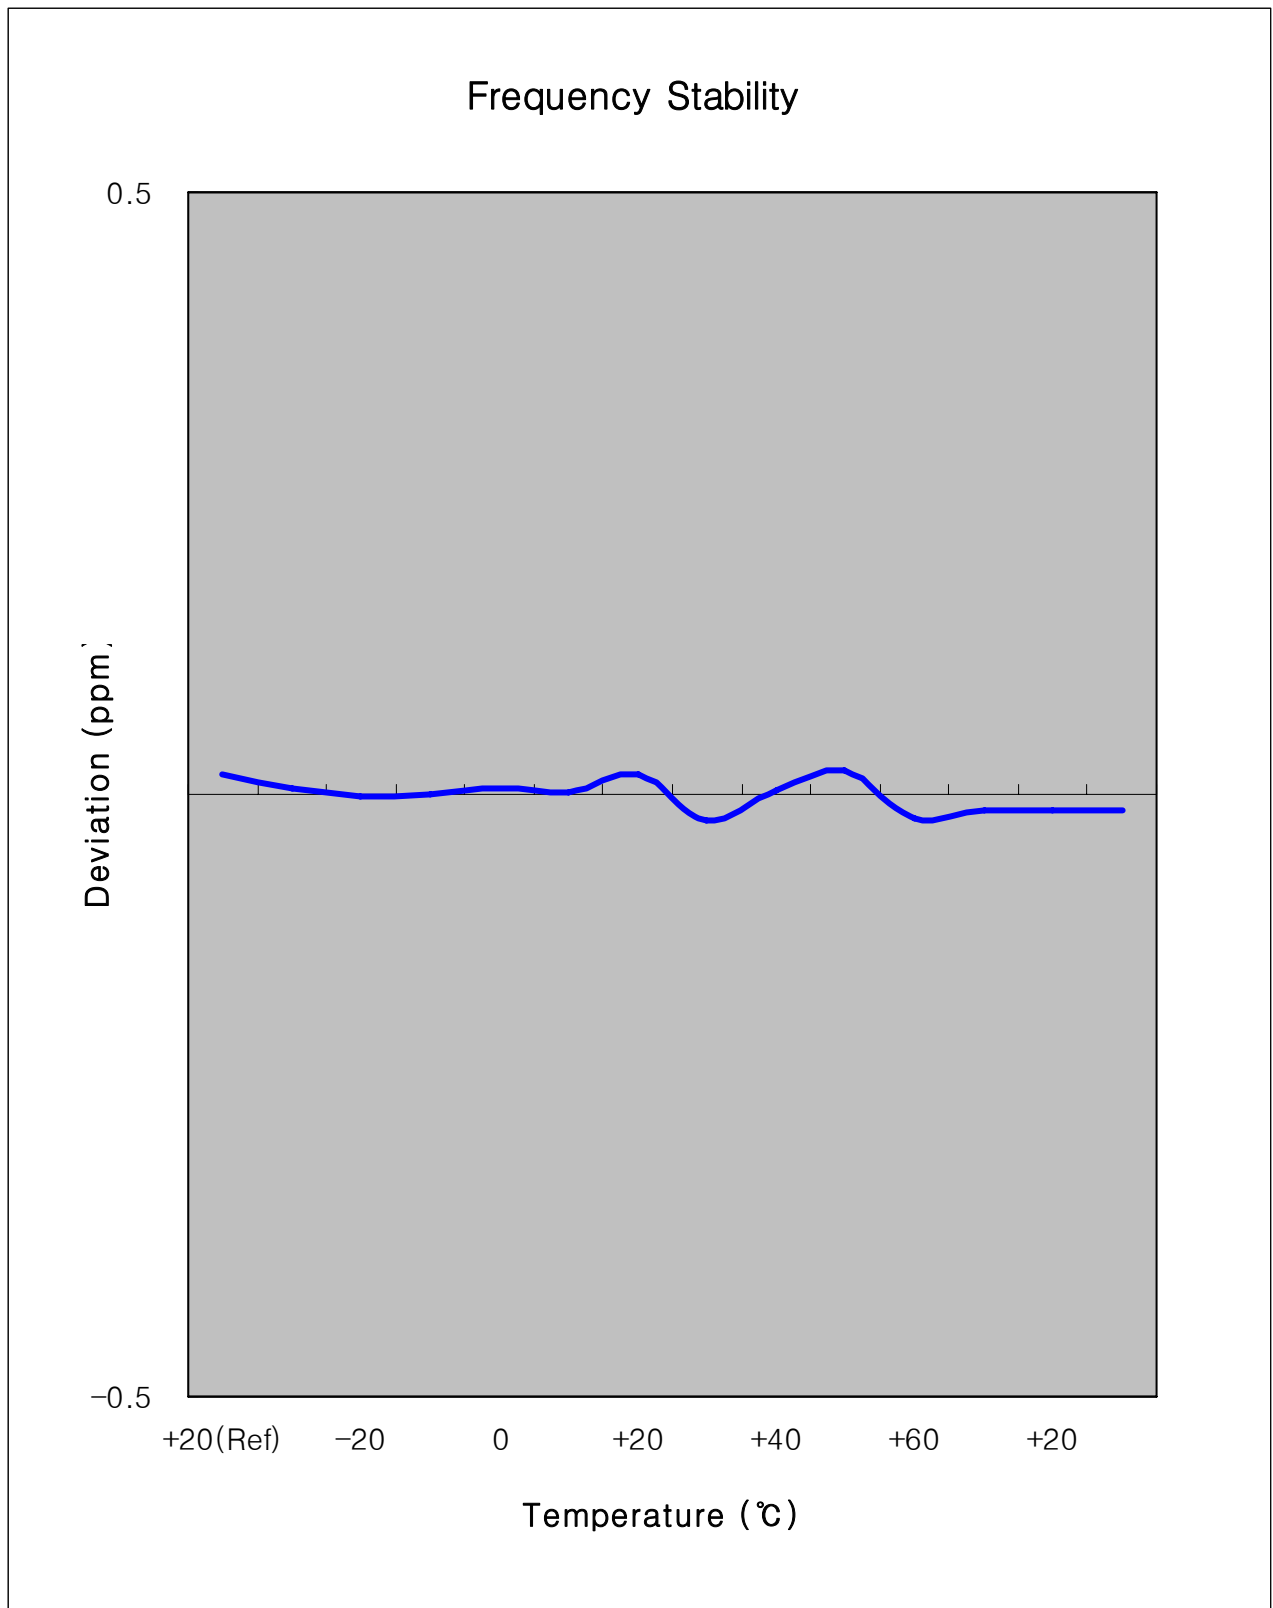



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx only and WLAN.

FCC ID : A3LGTS5830I complies with all the requirements of Parts 2,22,24 of the FCC Rules.


8. TEST PLOTS



Agilent

R T


Freq/Channel

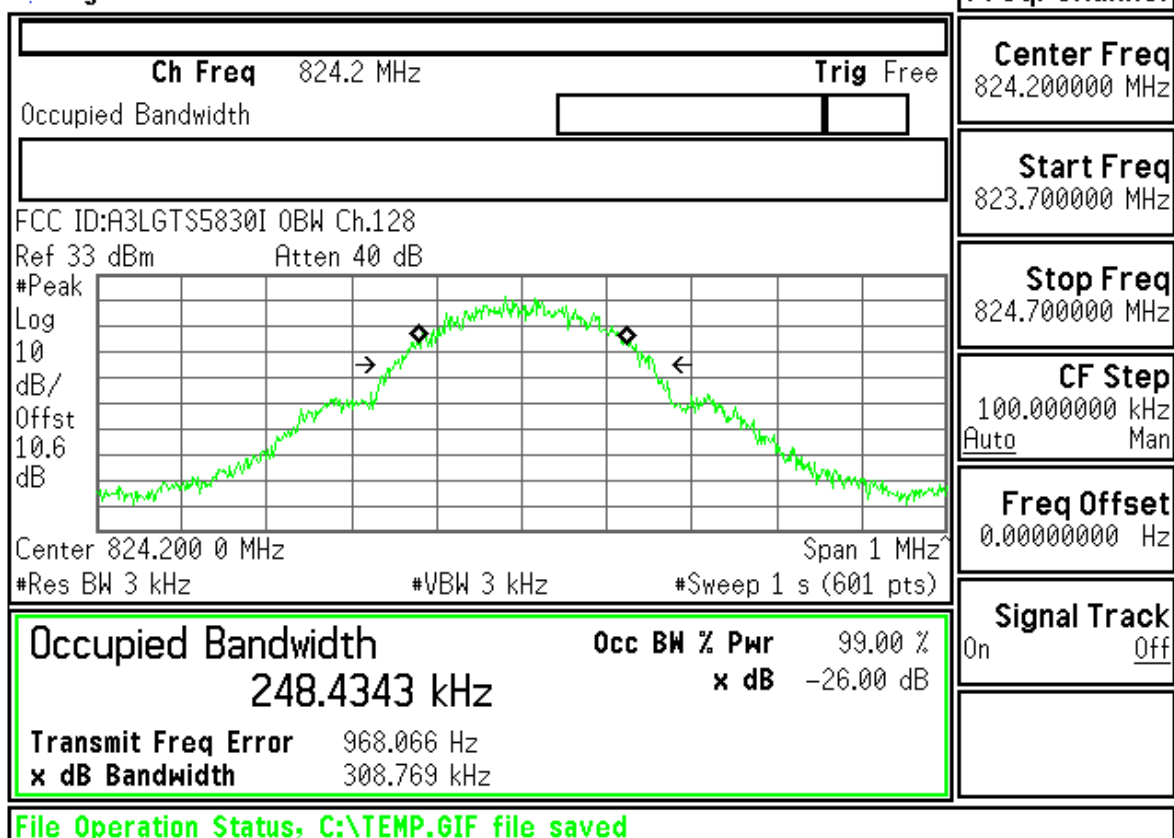
Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T

Freq/Channel

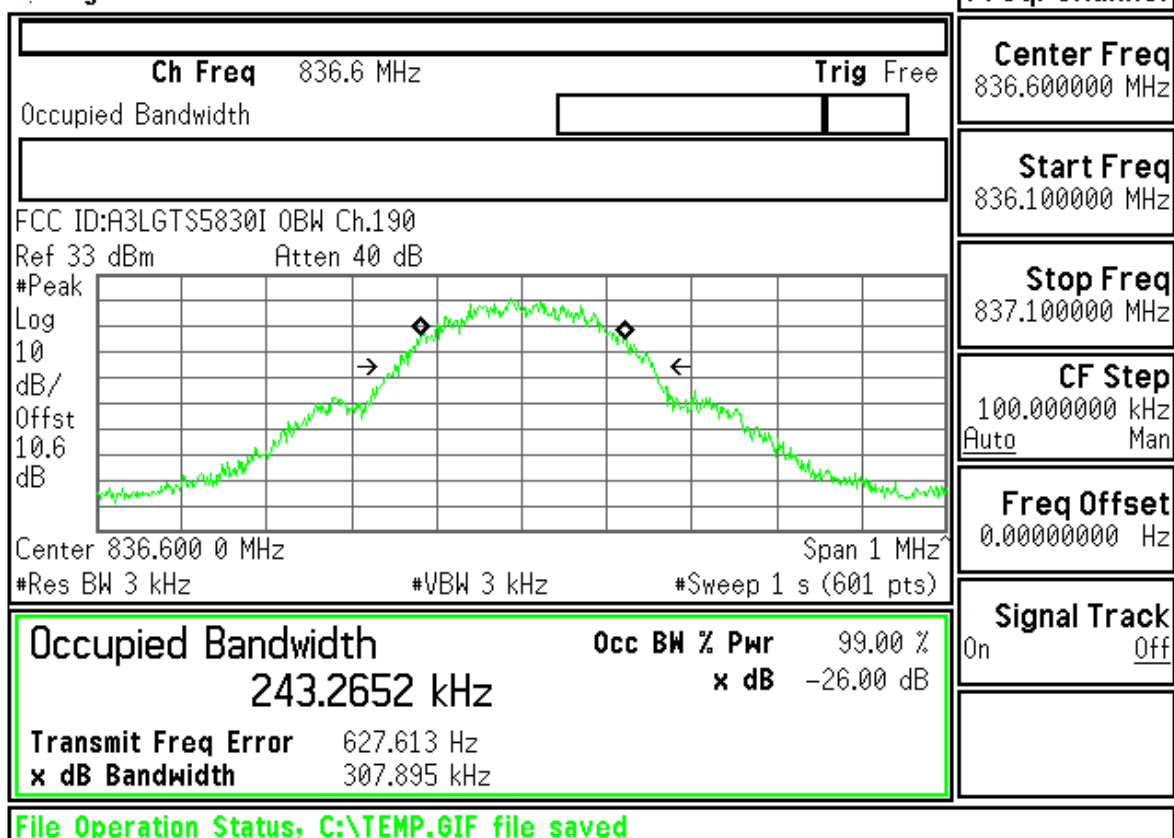Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off


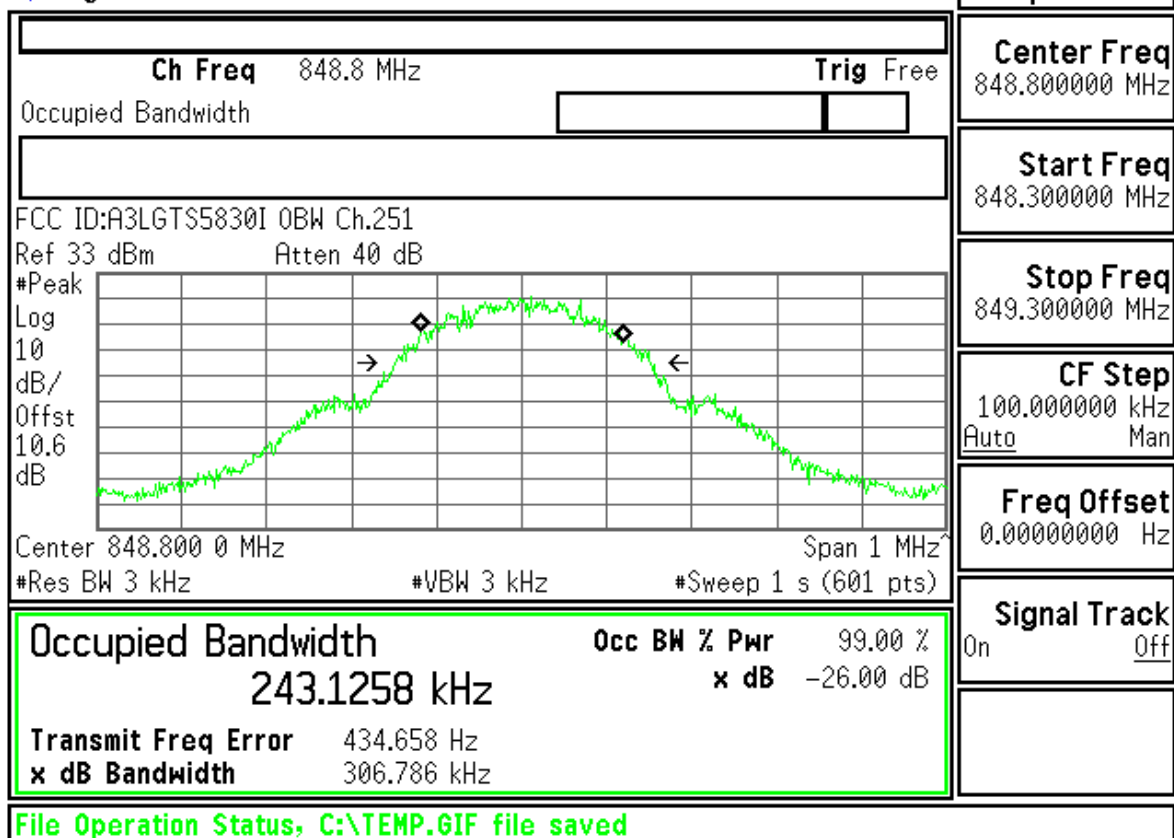




Measurement/Instrument Screen												
Control		Transmit Power							TCH Parms			
Transmit Power Setup ▾									Downlink Traffic Power ▾			
			Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	Traffic Band			
		BP	32.45	----	----	----	----	----	GSM850			
		ECP	32.45	----	----	----	----	----	Traffic Channel			
									128			
		Single										
Swap Window Positions		Phase & Frequency Error									RIS TX Level	
			Peak Phase °		RMS Phase °		Frequency Hz		5			
		Minimum	1.96		0.43		10.24					
		Maximum	3.34		0.63		20.04		Channel Mode Setup ▾			
		Average	2.51		0.50		15.02					
		Pass/Fail	Pass		Pass		Pass		Return			
		50 / 50									Single	
				Active Cell Connected				Sys Type: GSM				
		1 of 2				IntRef	Offset	R	T			1 of 2


Measurement/Instrument Screen																																																									
Control		Transmit Power									TCH Parms																																														
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td><td>Burst 5</td><td>Burst 6</td></tr><tr><td>BP</td><td>32.25</td><td>----</td><td>----</td><td>----</td><td>----</td><td>----</td></tr><tr><td>ECP</td><td>32.25</td><td>----</td><td>----</td><td>----</td><td>----</td><td>----</td></tr></table>										Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	32.25	----	----	----	----	----	ECP	32.25	----	----	----	----	----	Downlink Traffic Power ▾																									
												Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																																								
											BP	32.25	----	----	----	----	----																																								
											ECP	32.25	----	----	----	----	----																																								
											Traffic Band																																														
GSM850																																																									
Swap Window Positions		<table><tr><td colspan="10">Phase & Frequency Error</td></tr><tr><td></td><td colspan="2">Peak Phase °</td><td colspan="2">RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td colspan="2">2.82</td><td colspan="2">0.45</td><td colspan="2">5.04</td></tr><tr><td>Maximum</td><td colspan="2">4.46</td><td colspan="2">0.66</td><td colspan="2">16.75</td></tr><tr><td>Average</td><td colspan="2">3.68</td><td colspan="2">0.54</td><td colspan="2">10.16</td></tr><tr><td>Pass/Fail</td><td colspan="2">Pass</td><td colspan="2">Pass</td><td colspan="2">Pass</td></tr></table>									Phase & Frequency Error											Peak Phase °		RMS Phase °		Frequency Hz		Minimum	2.82		0.45		5.04		Maximum	4.46		0.66		16.75		Average	3.68		0.54		10.16		Pass/Fail	Pass		Pass		Pass		Traffic Channel	
											Phase & Frequency Error																																														
												Peak Phase °		RMS Phase °		Frequency Hz																																									
											Minimum	2.82		0.45		5.04																																									
											Maximum	4.46		0.66		16.75																																									
Average	3.68		0.54		10.16																																																				
Pass/Fail	Pass		Pass		Pass																																																				
190																																																									
Single																																																									
		<table><tr><td colspan="10">Phase & Frequency Error</td></tr><tr><td></td><td colspan="2">Peak Phase °</td><td colspan="2">RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td colspan="2">2.82</td><td colspan="2">0.45</td><td colspan="2">5.04</td></tr><tr><td>Maximum</td><td colspan="2">4.46</td><td colspan="2">0.66</td><td colspan="2">16.75</td></tr><tr><td>Average</td><td colspan="2">3.68</td><td colspan="2">0.54</td><td colspan="2">10.16</td></tr><tr><td>Pass/Fail</td><td colspan="2">Pass</td><td colspan="2">Pass</td><td colspan="2">Pass</td></tr></table>									Phase & Frequency Error											Peak Phase °		RMS Phase °		Frequency Hz		Minimum	2.82		0.45		5.04		Maximum	4.46		0.66		16.75		Average	3.68		0.54		10.16		Pass/Fail	Pass		Pass		Pass		RIS TX Level	
											Phase & Frequency Error																																														
												Peak Phase °		RMS Phase °		Frequency Hz																																									
											Minimum	2.82		0.45		5.04																																									
											Maximum	4.46		0.66		16.75																																									
Average	3.68		0.54		10.16																																																				
Pass/Fail	Pass		Pass		Pass																																																				
5																																																									
Channel Mode Setup ▾																																																									
Return																																																									
1 of 2		50 / 50 Single									1 of 2																																														
		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td colspan="2"></td><td colspan="4"></td><td colspan="3"></td></tr></table>											Active Cell Connected				Sys Type: GSM																																								
		Active Cell Connected				Sys Type: GSM																																																			
		<table><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>												IntRef	Offset	R	T																																								
			IntRef	Offset	R	T																																																			

Measurement/Instrument Screen																														
Control		Transmit Power						TCH Parms																						
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>32.10</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>32.10</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	32.10	----	----	----	----	----	ECP	32.10	----	----	----	----	----	Downlink Traffic Power	
	Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																								
BP	32.10	----	----	----	----	----																								
ECP	32.10	----	----	----	----	----																								
Swap Window Positions		Single						Traffic Band																						
								GSM850																						
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Traffic Channel		
									Peak Phase °	RMS Phase °	Frequency Hz																			
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											
		50 / 50						251																						
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	MS TX Level		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											
		Single						5																						
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Return		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass			
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	1 of 2		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	4.37	0.65	-0.71																											
Maximum	6.27	0.88	12.86																											
Average	5.03	0.75	7.11																											
Pass/Fail	Pass	Pass	Pass																											

Measurement/Instrument Screen																																					
Control		Power vs Time Graph						TCH Parms																													
Power vs Time Setup								Downlink Traffic Power																													
Change View		<table border="1"> <thead> <tr> <th>Burst</th> <th>Tx Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.45</td> <td>GSMK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>5</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>6</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	Tx Power (dBm)	Modulation	Mask	1	32.45	GSMK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	5	----	----	----	6	----	----	----	Traffic Band	
Burst	Tx Power (dBm)	Modulation	Mask																																		
1	32.45	GSMK	ETSI																																		
2	----	----	----																																		
3	----	----	----																																		
4	----	----	----																																		
5	----	----	----																																		
6	----	----	----																																		
		Single						GSM850																													
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Traffic Channel									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	128									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	MS TX Level									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	5									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	Return									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass										
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.37</td> <td>0.65</td> <td>-0.71</td> </tr> <tr> <td>Maximum</td> <td>6.27</td> <td>0.88</td> <td>12.86</td> </tr> <tr> <td>Average</td> <td>5.03</td> <td>0.75</td> <td>7.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.37	0.65	-0.71	Maximum	6.27	0.88	12.86	Average	5.03	0.75	7.11	Pass/Fail	Pass	Pass	Pass	1 of 2									
	Peak Phase °	RMS Phase °	Frequency Hz																																		
Minimum	4.37	0.65	-0.71																																		
Maximum	6.27	0.88	12.86																																		
Average	5.03	0.75	7.11																																		
Pass/Fail	Pass	Pass	Pass																																		

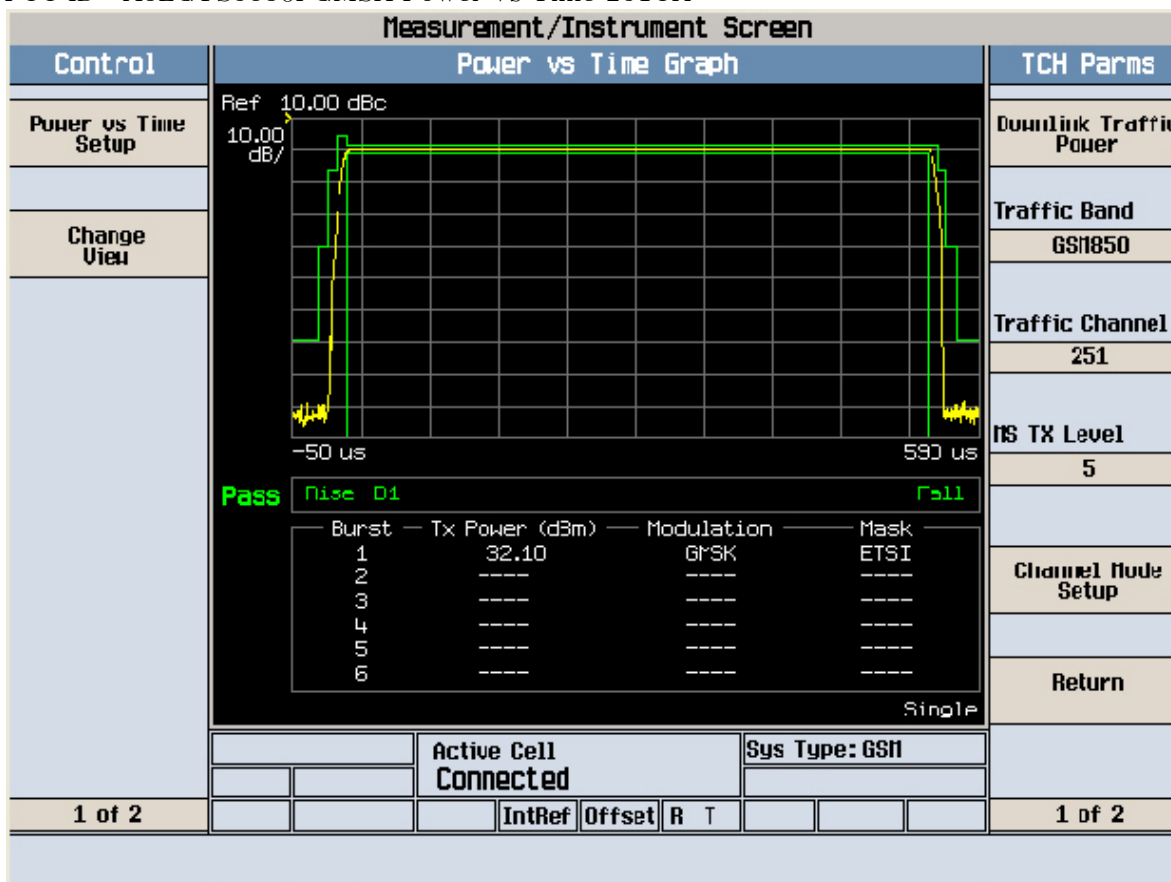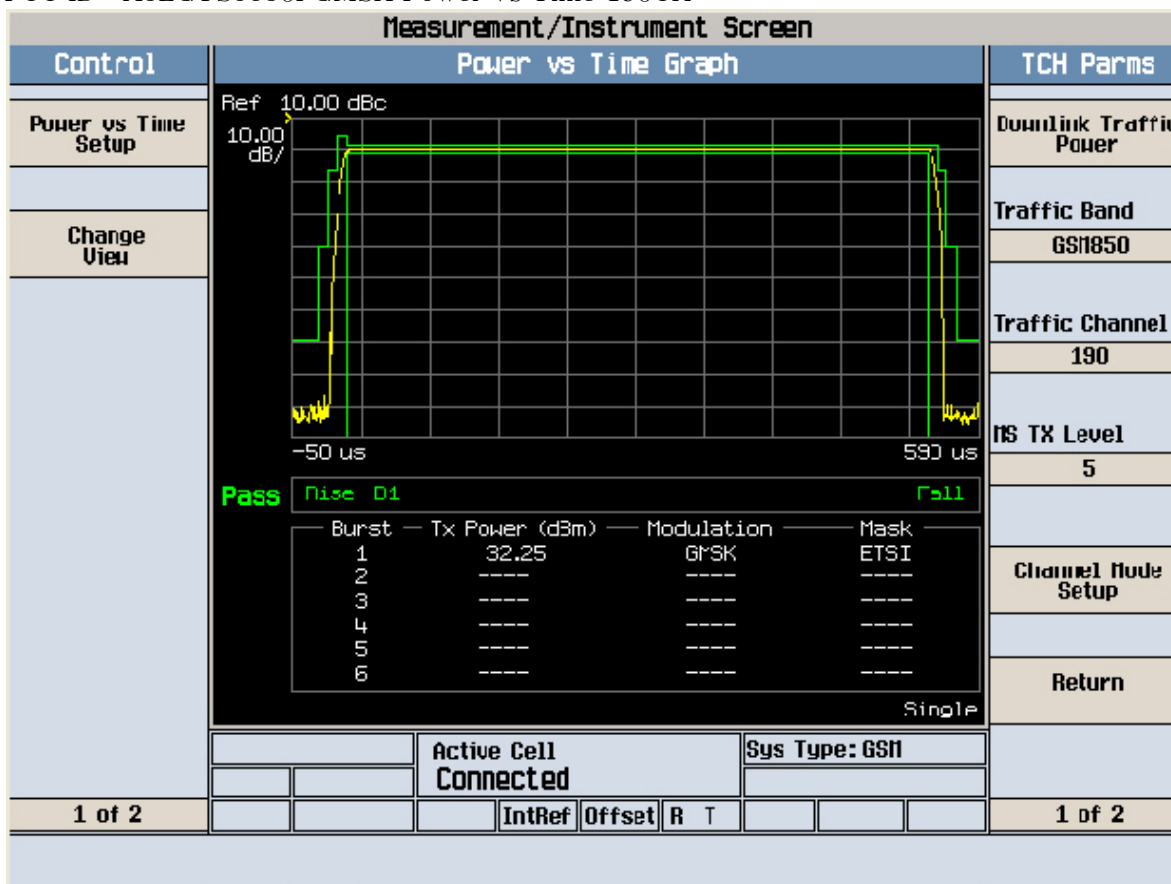

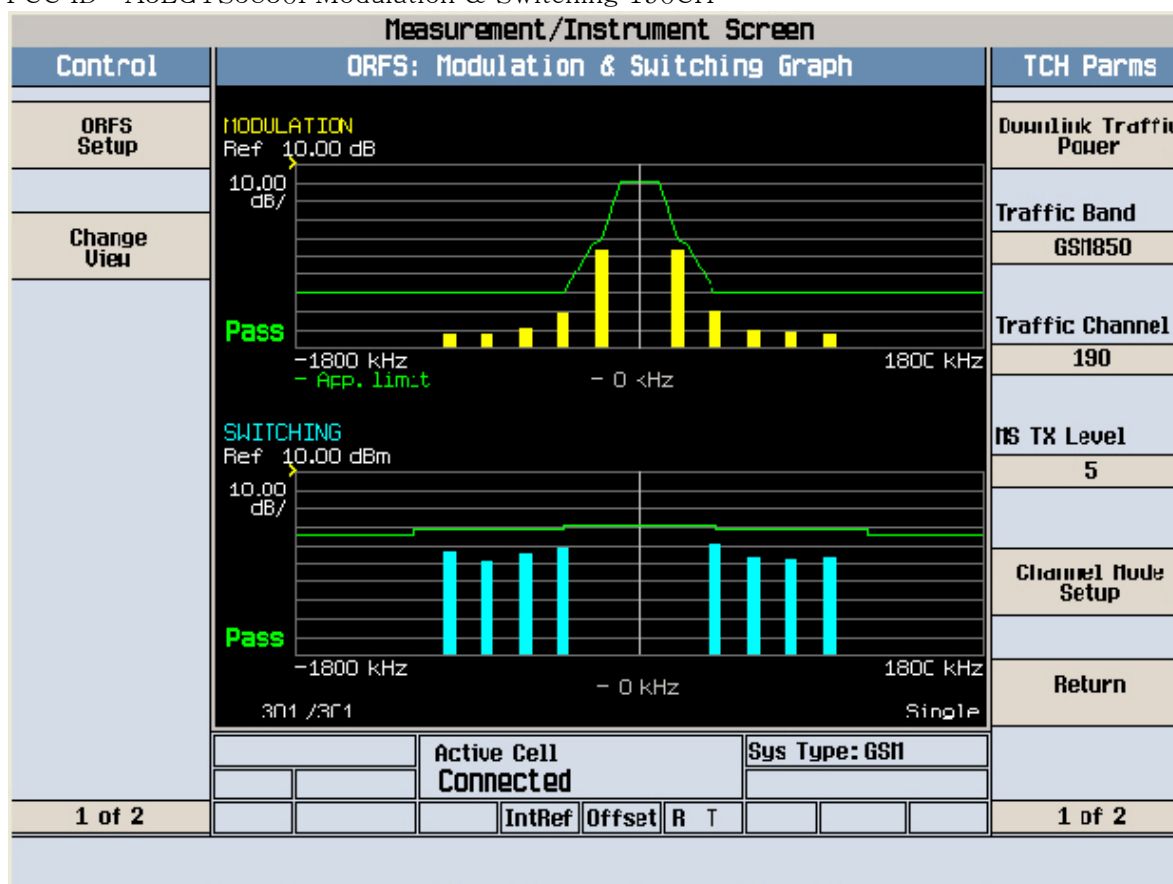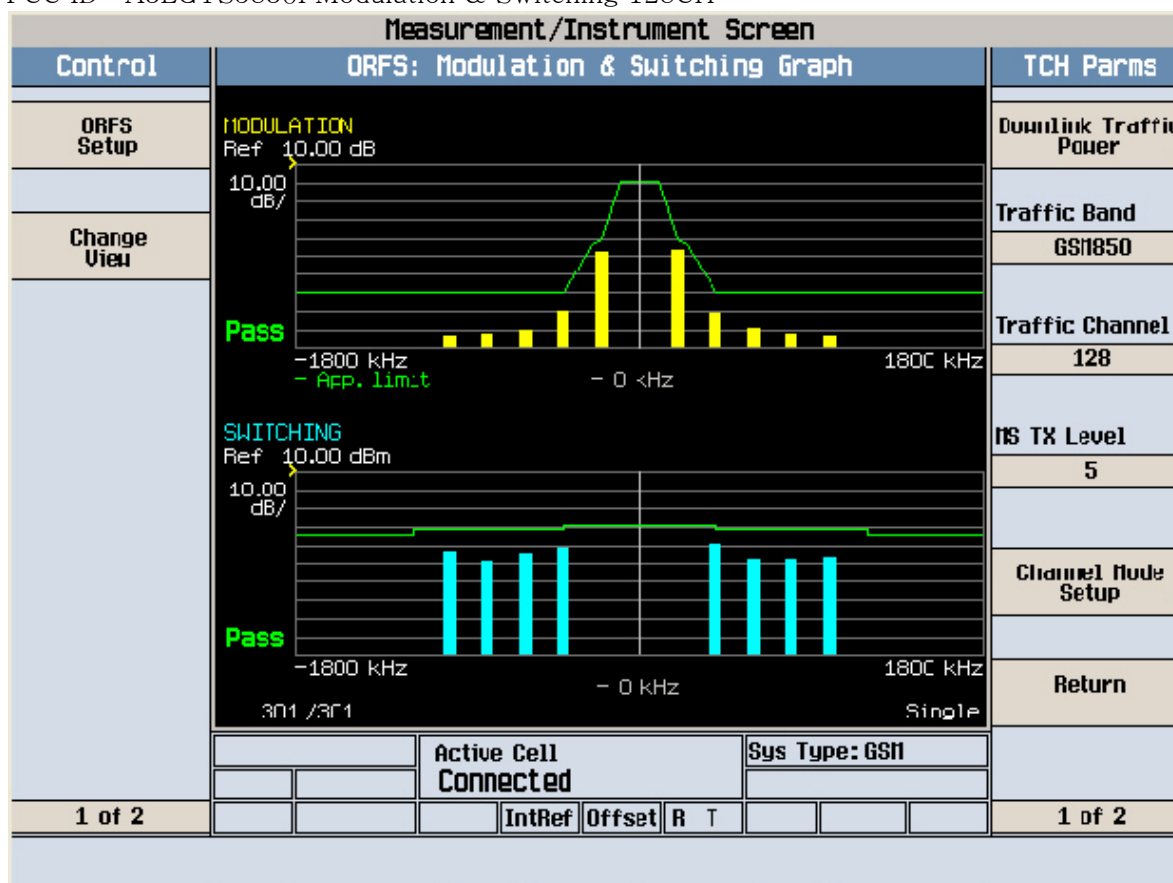

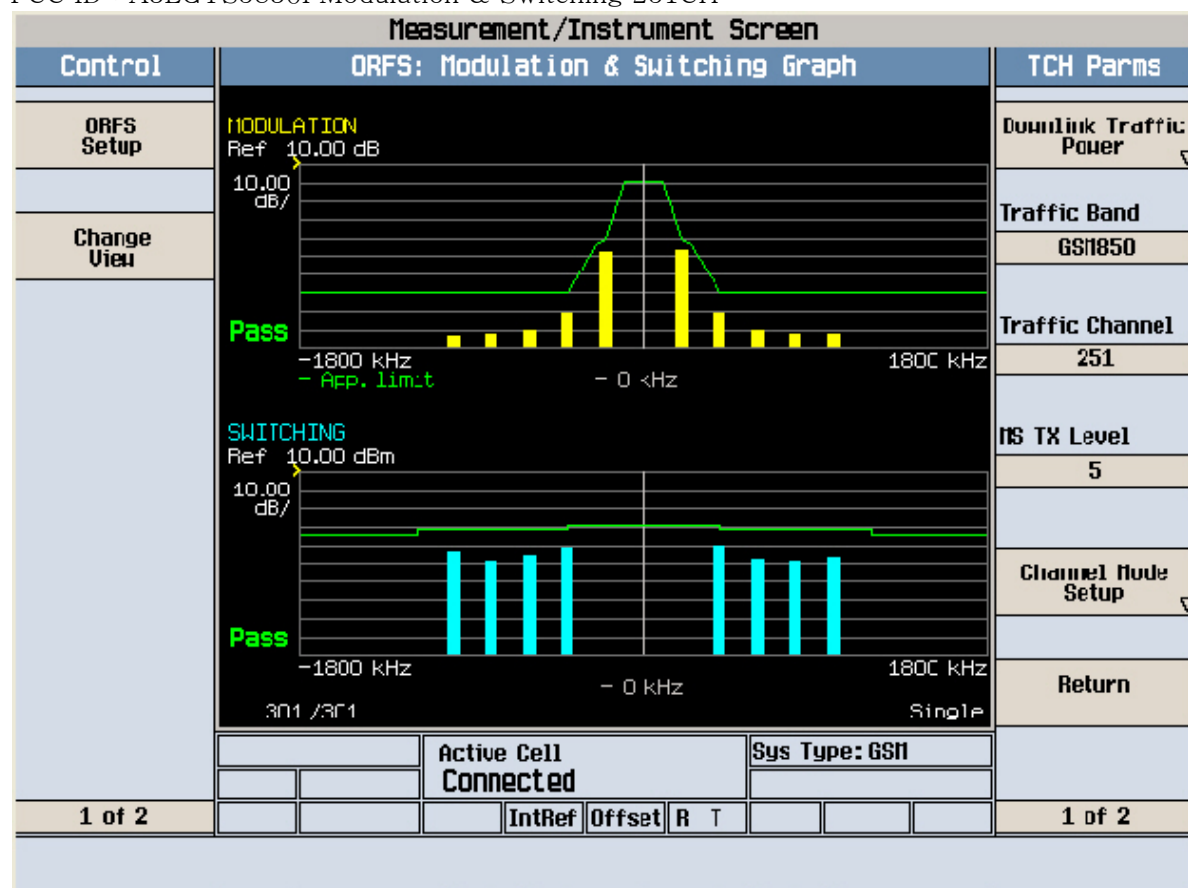

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.128

Mkr1 817.9 MHz

Ref 33 dBm

Atten 40 dB

-25.93 dBm

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

414.600000 MHz

Start Freq

10.0000000 MHz

Stop Freq

819.200000 MHz

CF Step

80.9200000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.36 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

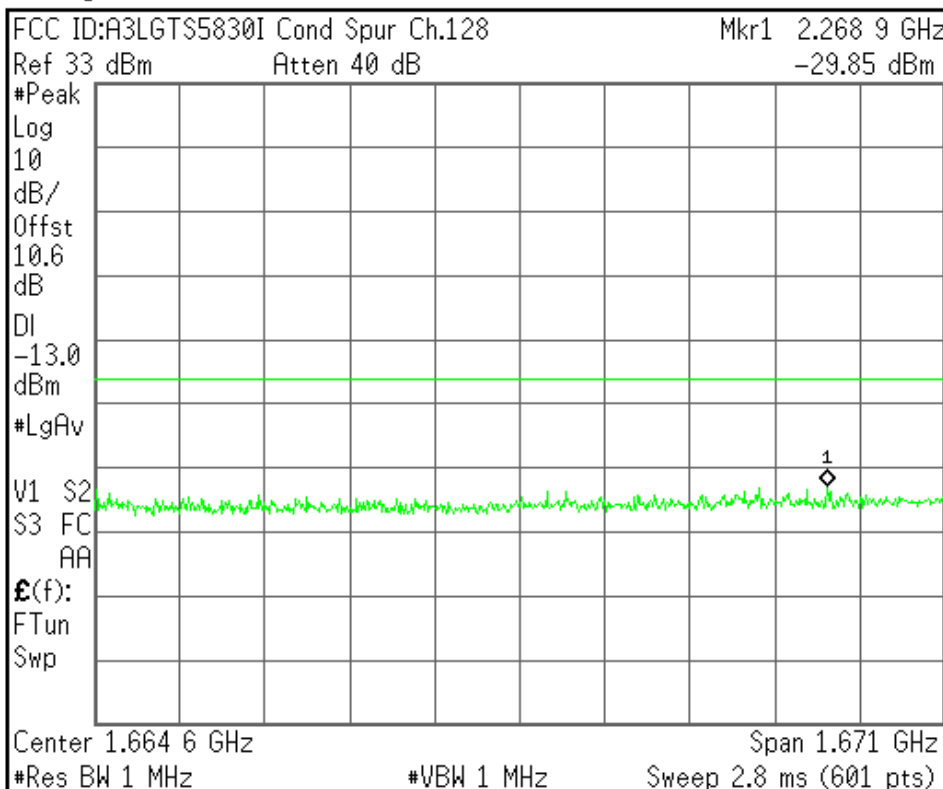

Center Freq
1.66460000 GHz

Start Freq
829.200000 MHz

Stop Freq
2.50000000 GHz

CF Step
167.080000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

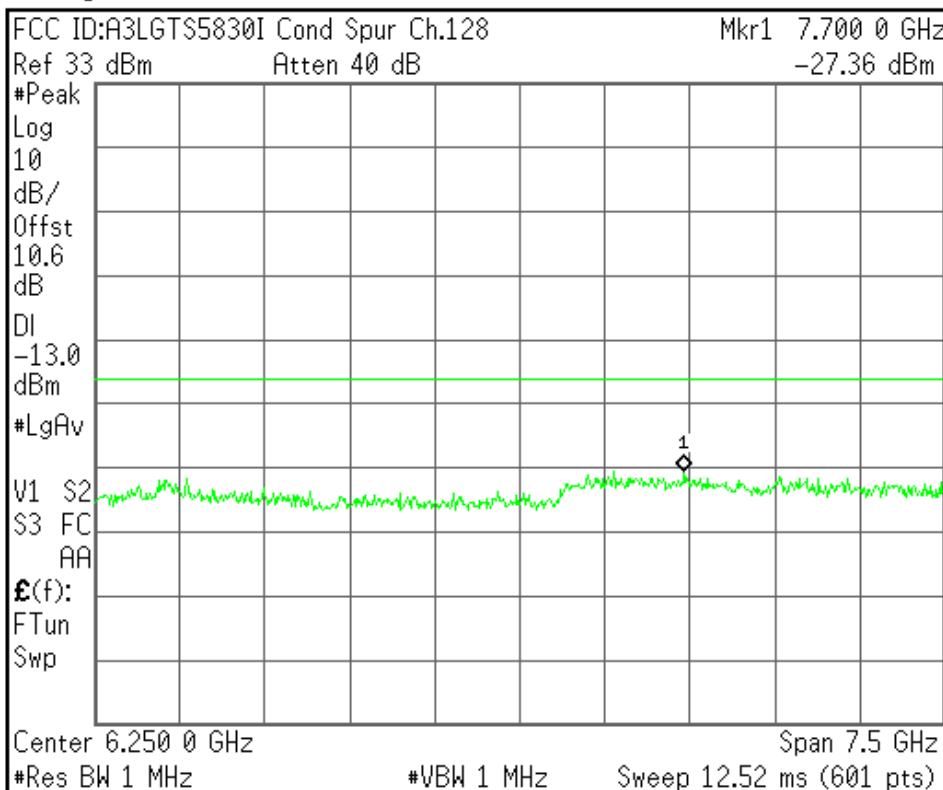

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.190

Mkr1 524.9 MHz

Ref 33 dBm

Atten 40 dB

-29.65 dBm

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz

Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

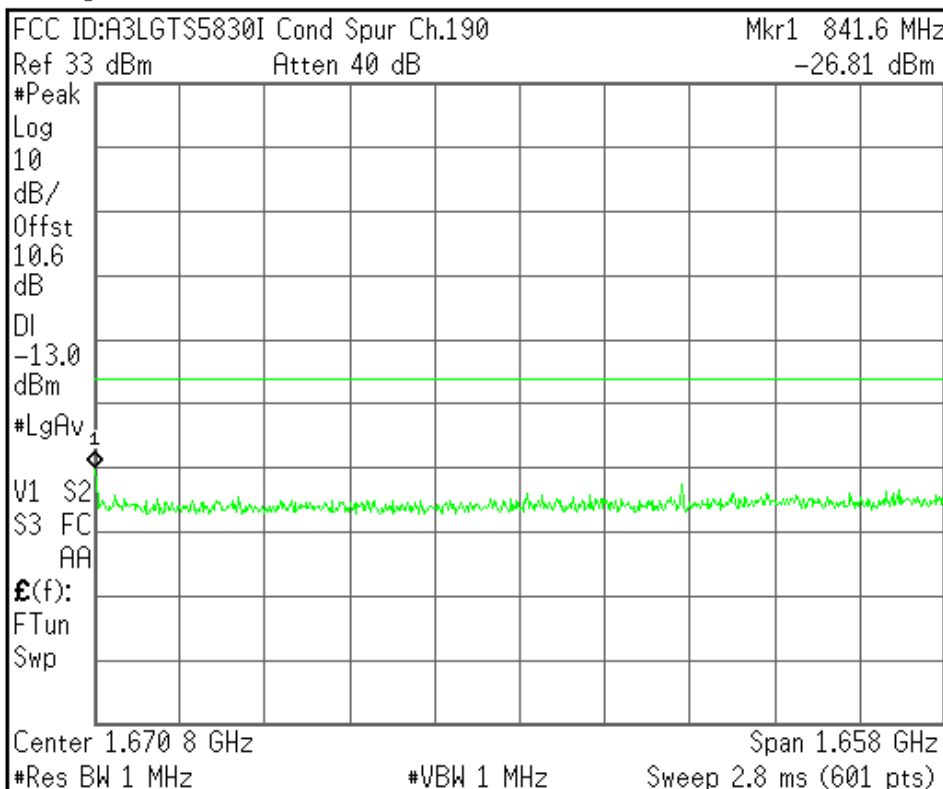

Center Freq
1.67080000 GHz

Start Freq
841.600000 MHz

Stop Freq
2.50000000 GHz

CF Step
165.840000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

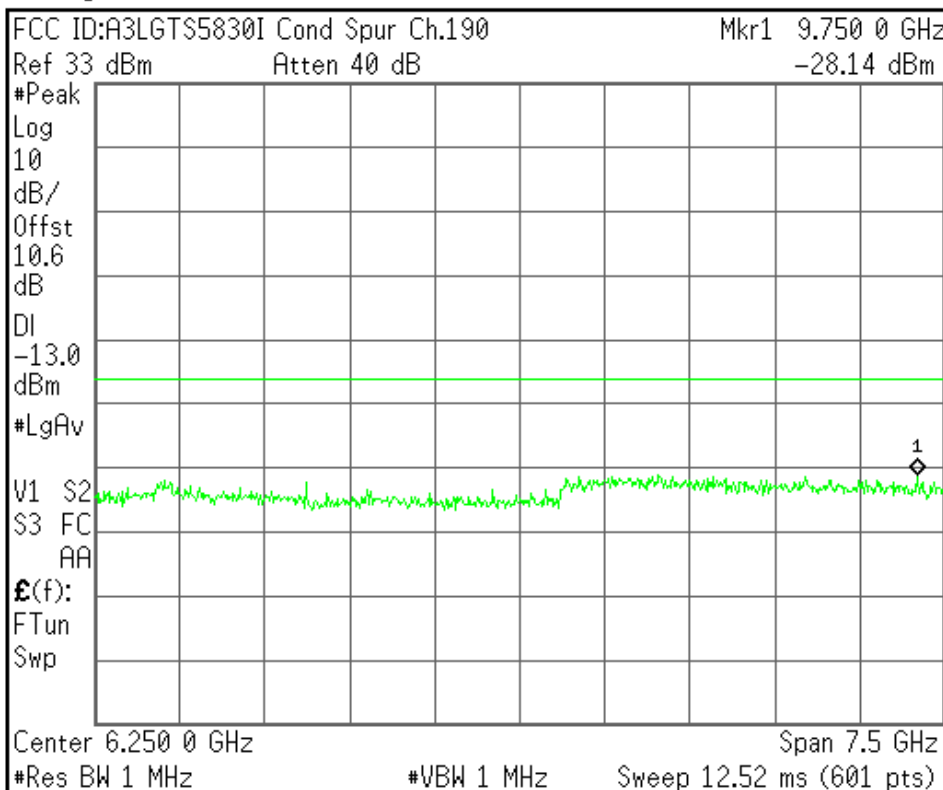

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.251

Mkr1 843.8 MHz

Ref 33 dBm

Atten 40 dB

-25.85 dBm

#Peak

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

426.900000 MHz

Start Freq

10.0000000 MHz

Stop Freq

843.800000 MHz

CF Step

83.3800000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

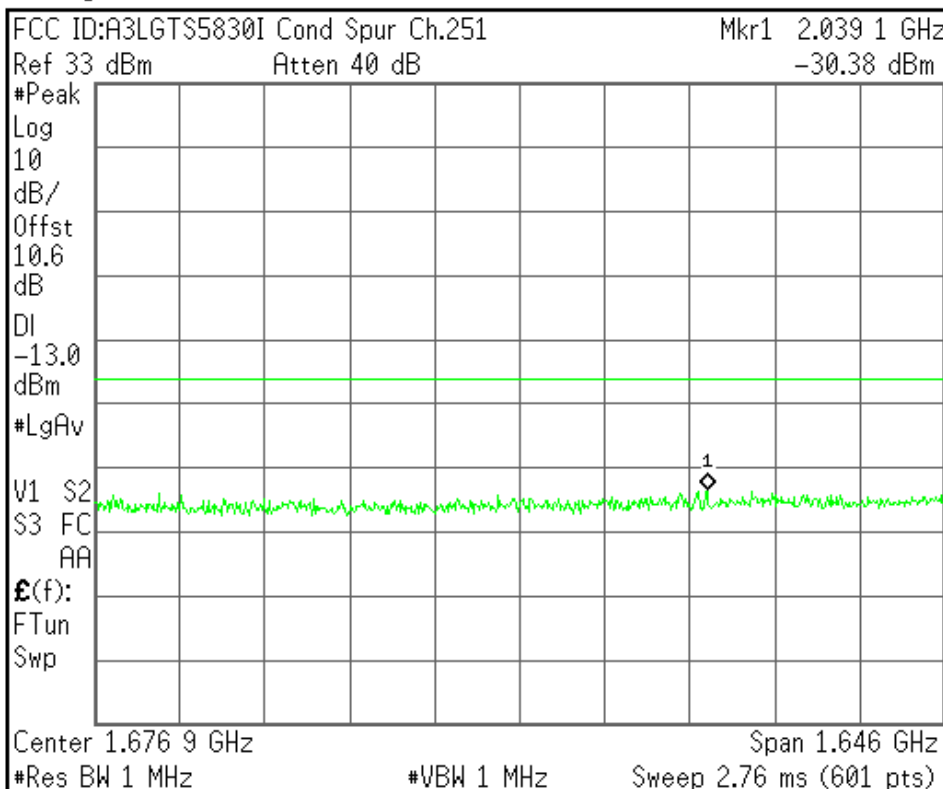

Center Freq
1.67690000 GHz

Start Freq
853.800000 MHz

Stop Freq
2.50000000 GHz

CF Step
164.620000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

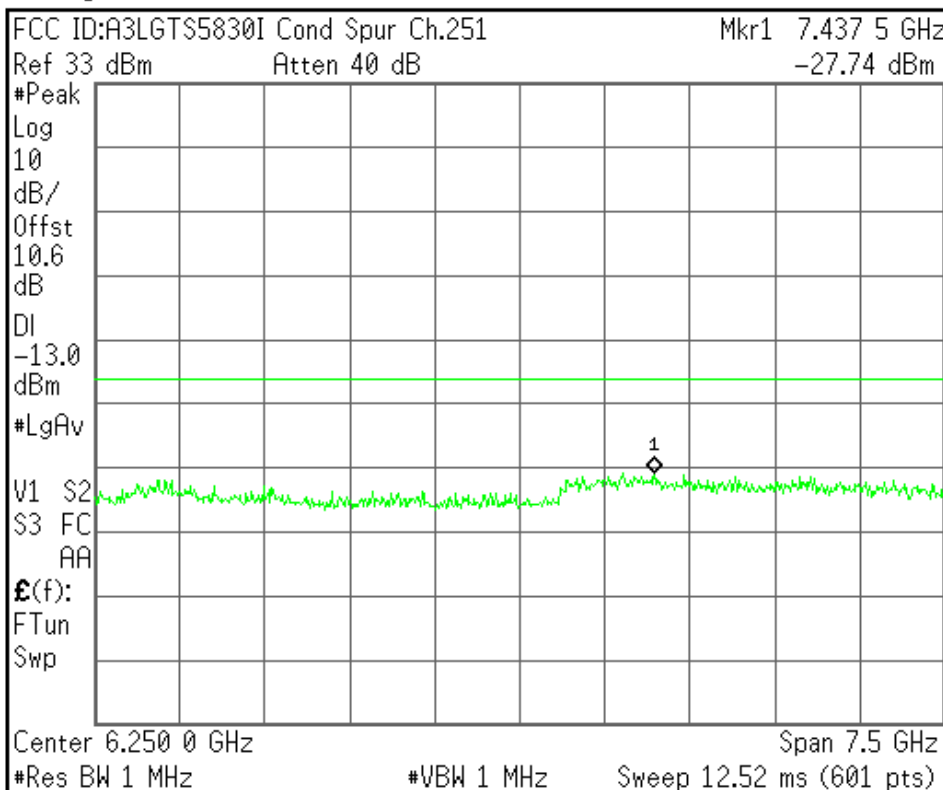

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

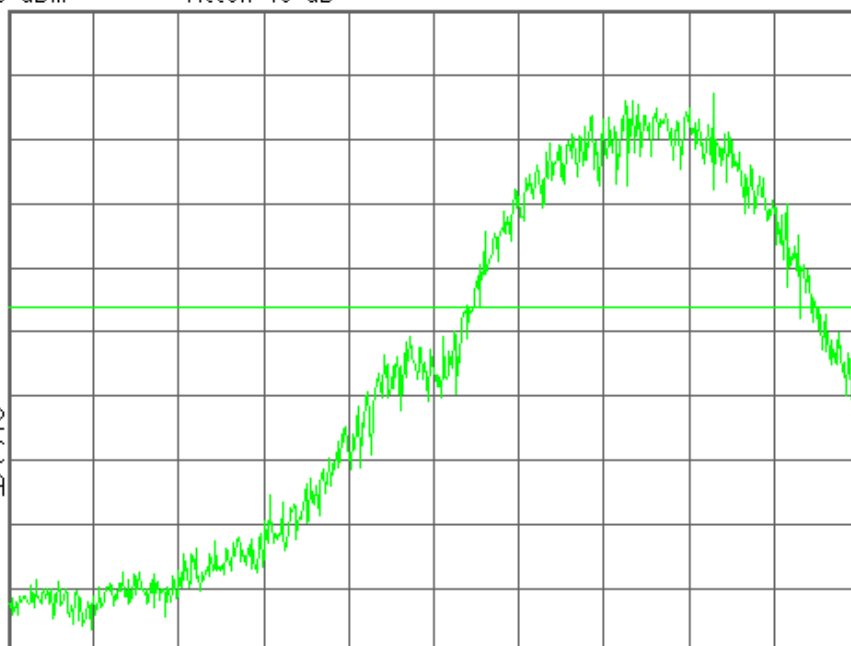

Center 824.000 00 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

824.000000 MHz

Start Freq

823.595000 MHz

Stop Freq

824.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.128

Mkr1 823.979 94 MHz

Ref 33 dBm

Atten 40 dB

-17.43 dBm

#Avg

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

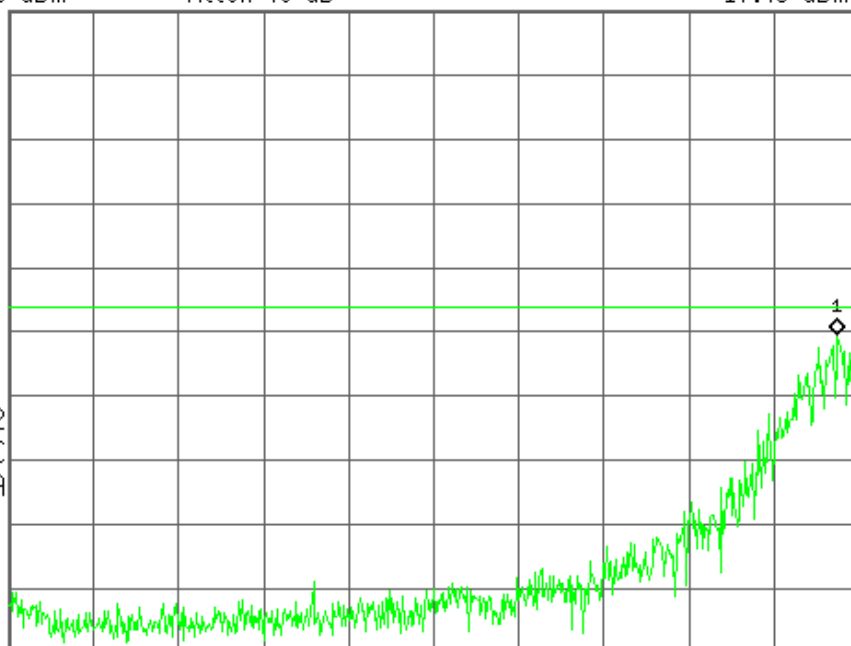

Center 823.595 00 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

823.595000 MHz

Start Freq

823.190000 MHz

Stop Freq

824.000000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

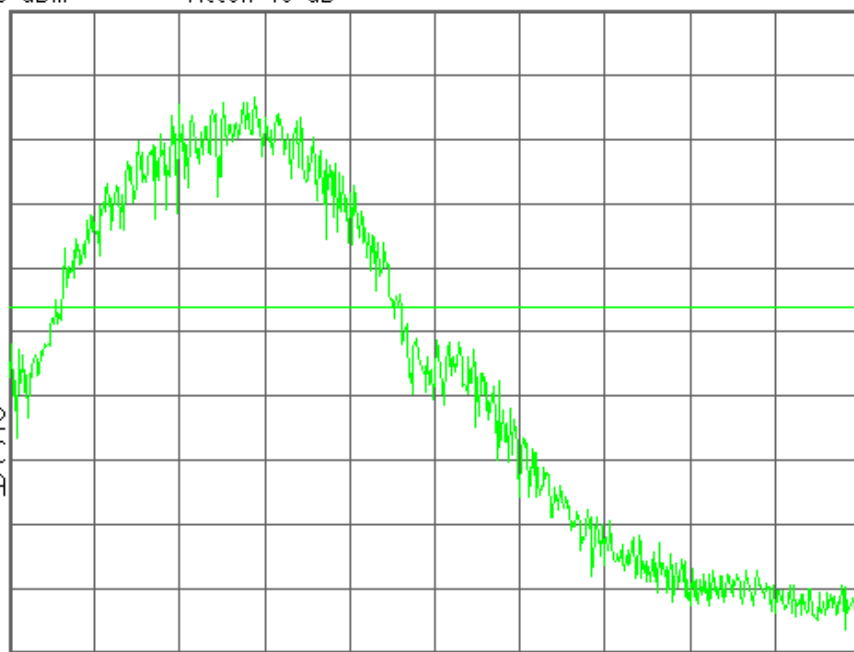

Center 849.000 00 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

849.000000 MHz

Start Freq

848.595000 MHz

Stop Freq

849.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.251

Mkr1 849.024 08 MHz

Ref 33 dBm

Atten 40 dB

-17.64 dBm

#Avg

Log

10

dB/

Offst

10.6

dB

DI

-13.0

dBm

#LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

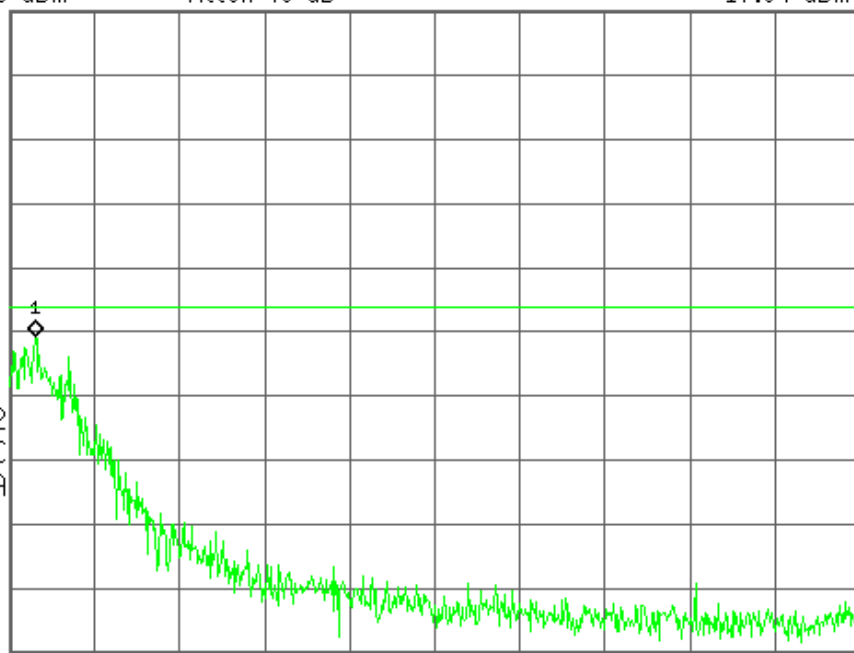

Center 849.405 00 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

849.405000 MHz

Start Freq

849.000000 MHz

Stop Freq

849.810000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off


File Operation Status, C:\TEMP.GIF file saved



Agilent

R T


Freq/Channel

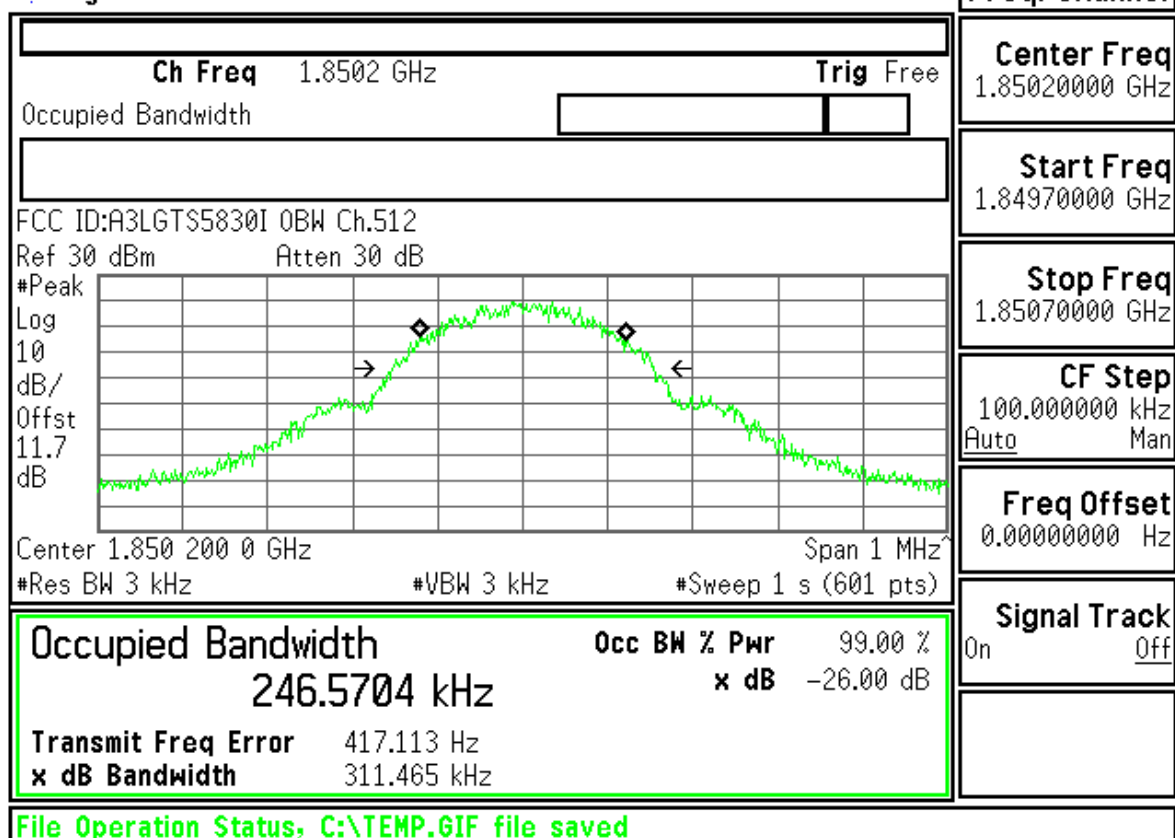
Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T



Freq/Channel


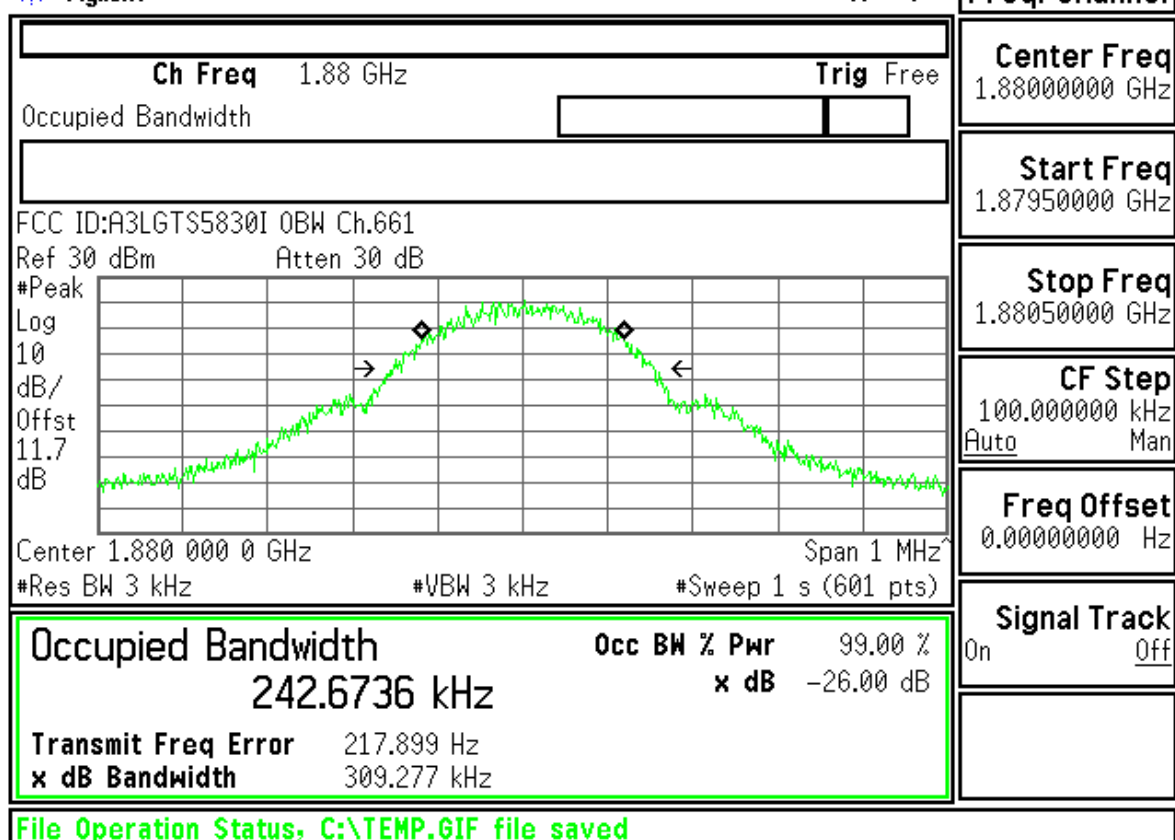
Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off


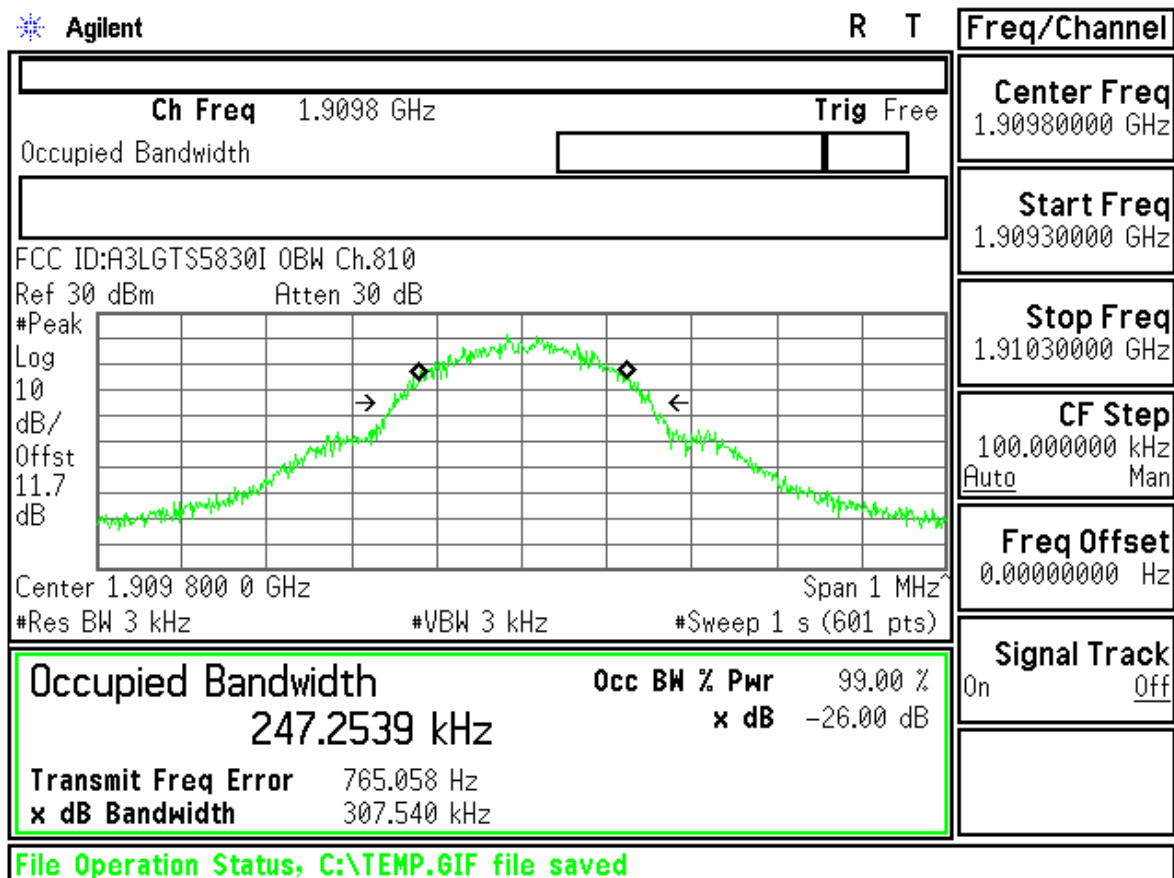


FCC ID : A3LGTS5830I Transmit Power 512CH

Measurement/Instrument Screen																														
Control		Transmit Power						TCH Parms																						
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td><td>Burst 5</td><td>Burst 6</td></tr><tr><td>BP</td><td>29.22</td><td>----</td><td>----</td><td>----</td><td>----</td><td>----</td></tr><tr><td>ECP</td><td>29.22</td><td>----</td><td>----</td><td>----</td><td>----</td><td>----</td></tr></table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	29.22	----	----	----	----	----	ECP	29.22	----	----	----	----	----	Downlink Traffic Power	
									Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																
								BP	29.22	----	----	----	----	----																
		ECP	29.22	----	----	----	----	----																						
		Traffic Band																												
PCS																														
Snap Window Positions		Single						Traffic Channel																						
								512																						
								MS TX Level																						
		0																												
		Channel Mode Setup																												
1 of 2		50 / 50 Single						Return																						
		Active Cell Connected						Sys Type: GSM																						
		IntRef						Offset																						
		R T																												
		1 of 2						1 of 2																						

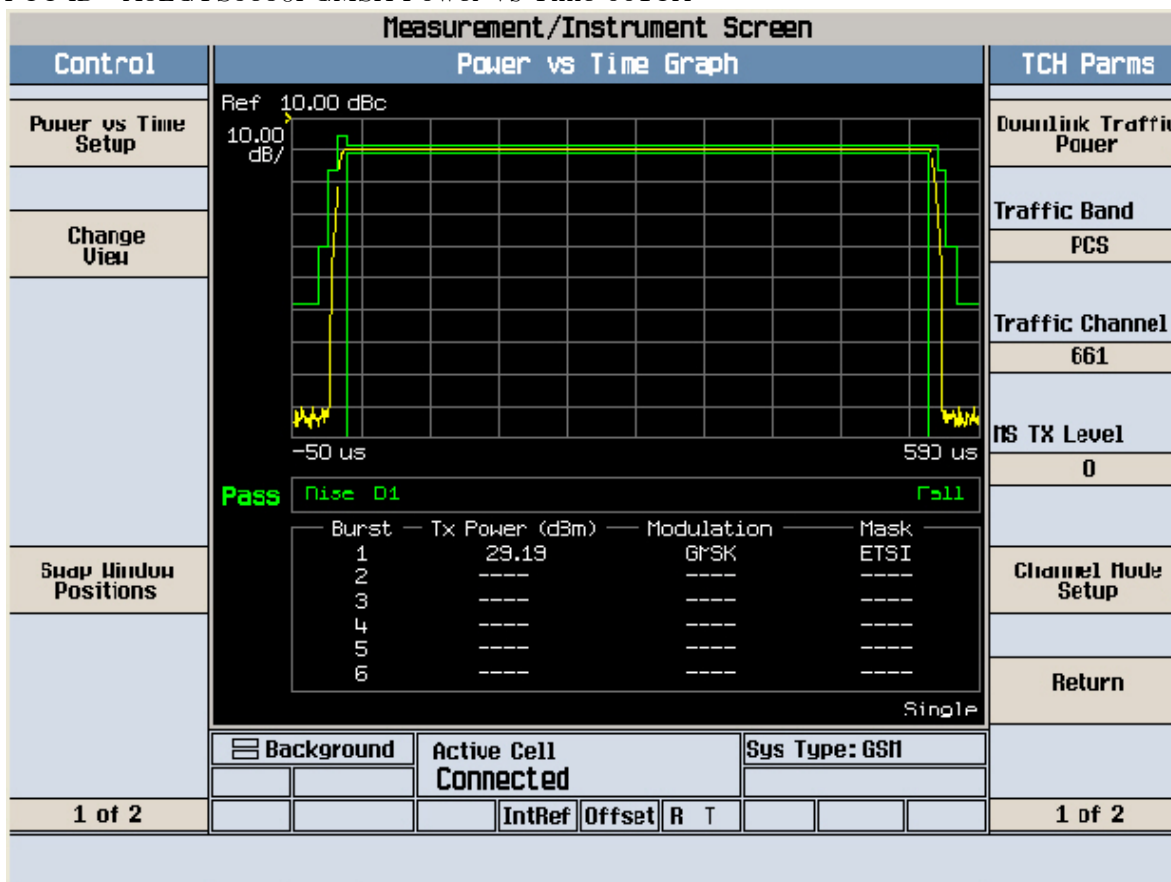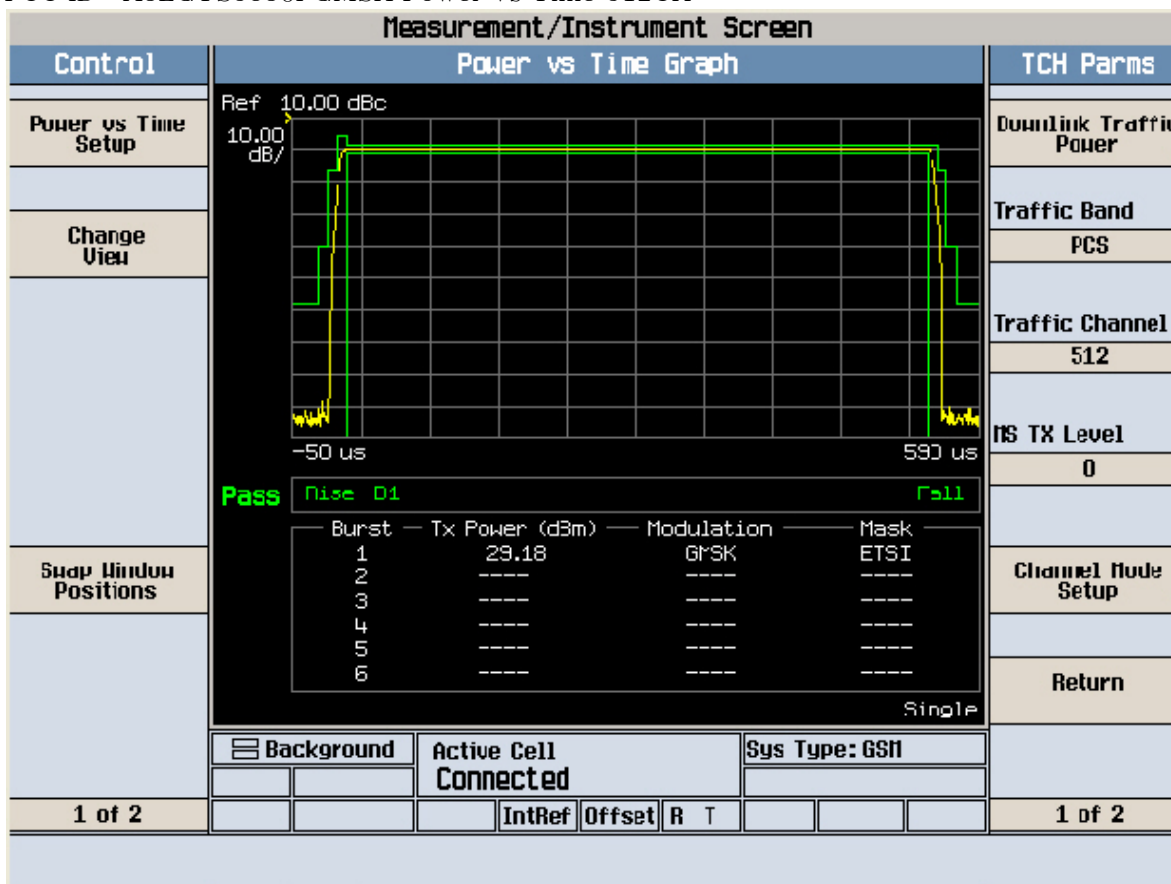

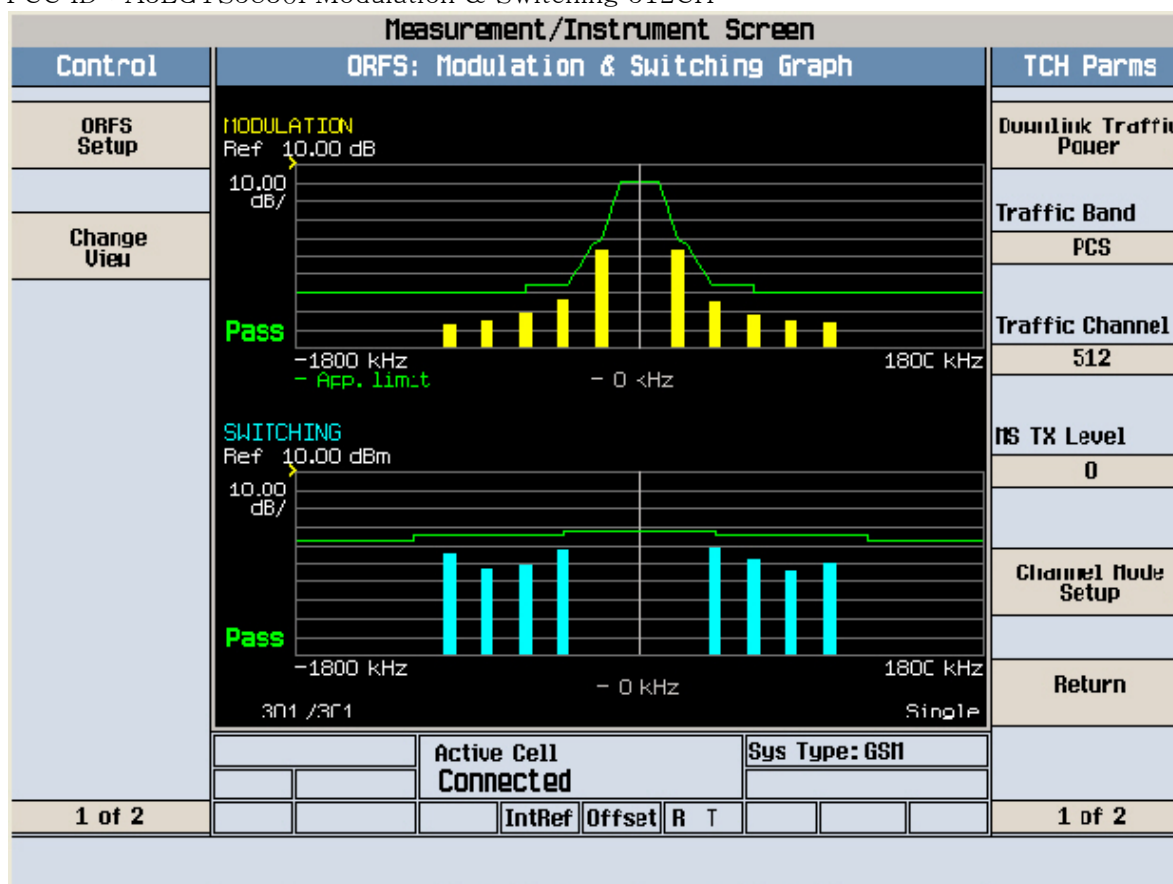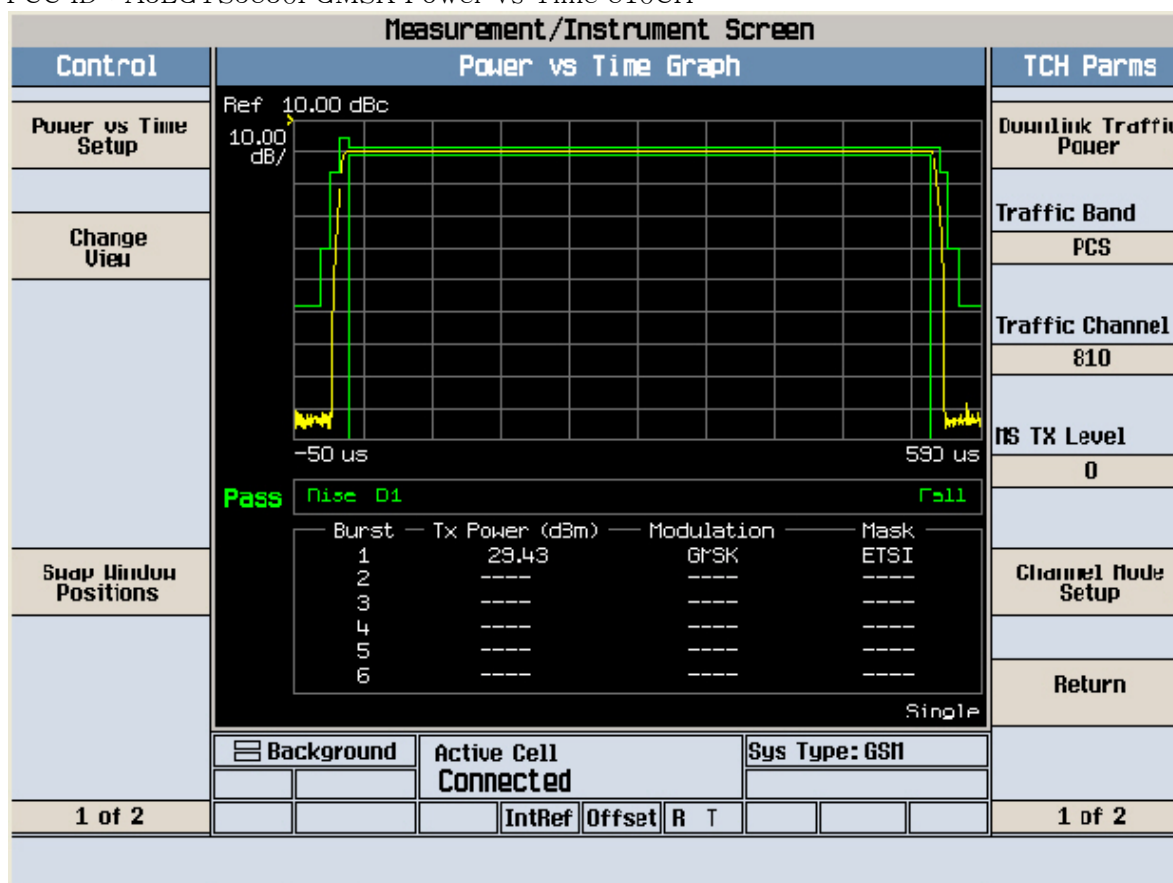

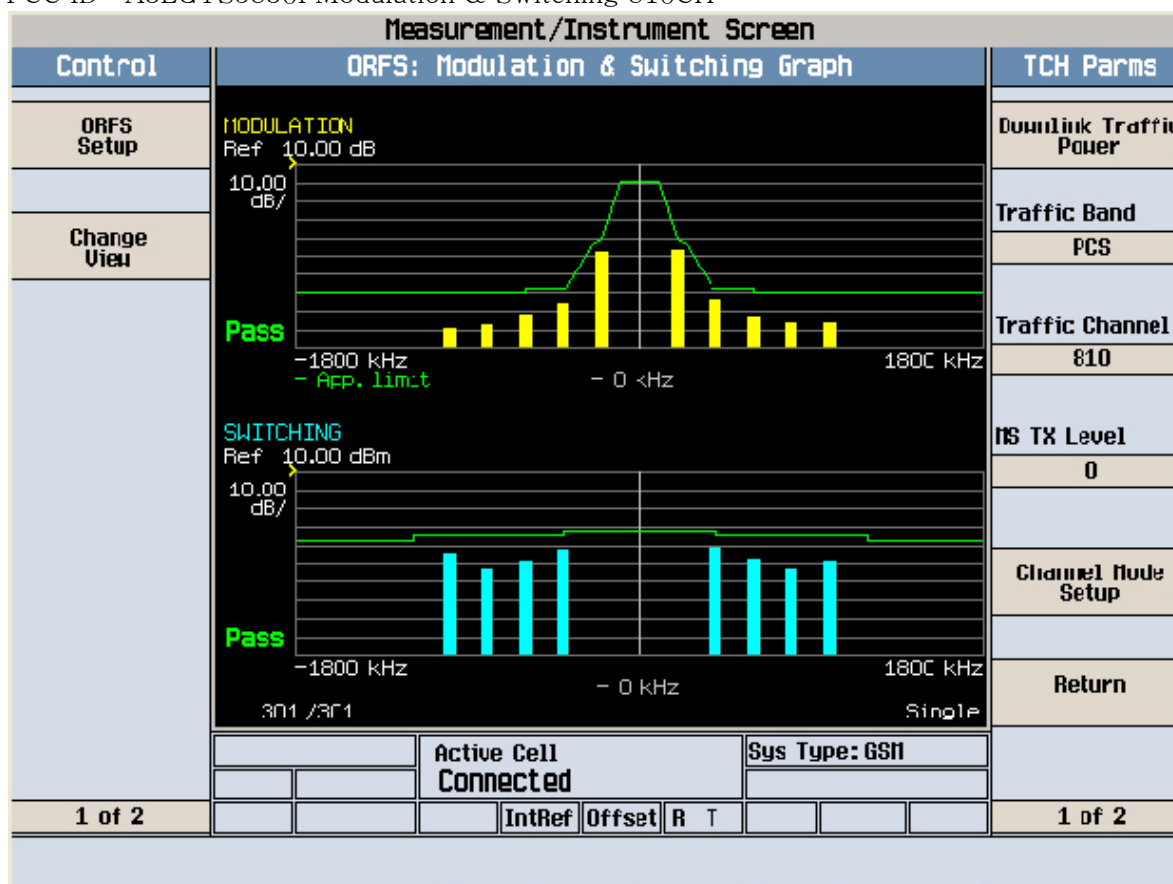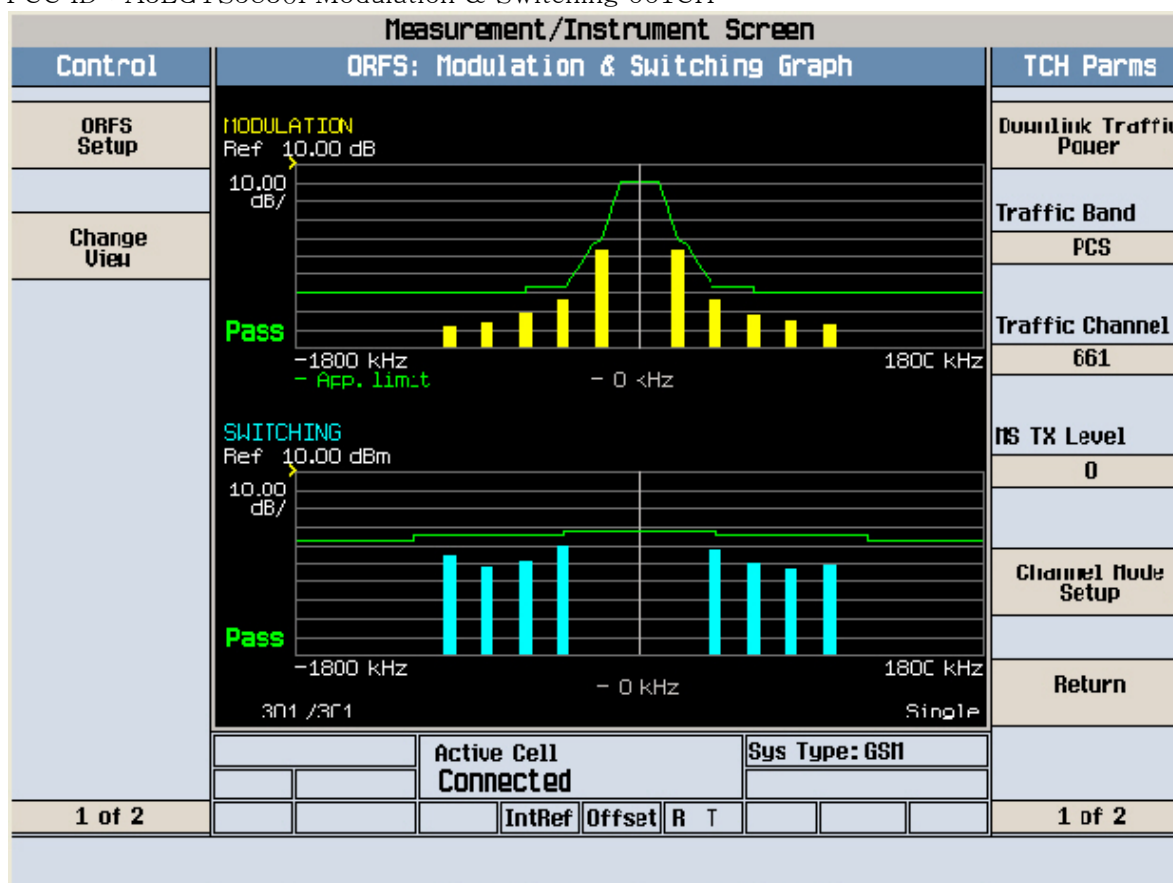

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.512

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2007 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.512

Mkr1 1.589 GHz

Ref 30 dBm

Atten 30 dB

-38.07 dBm

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
926.350000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.84270000 GHz

CF Step
183.270000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

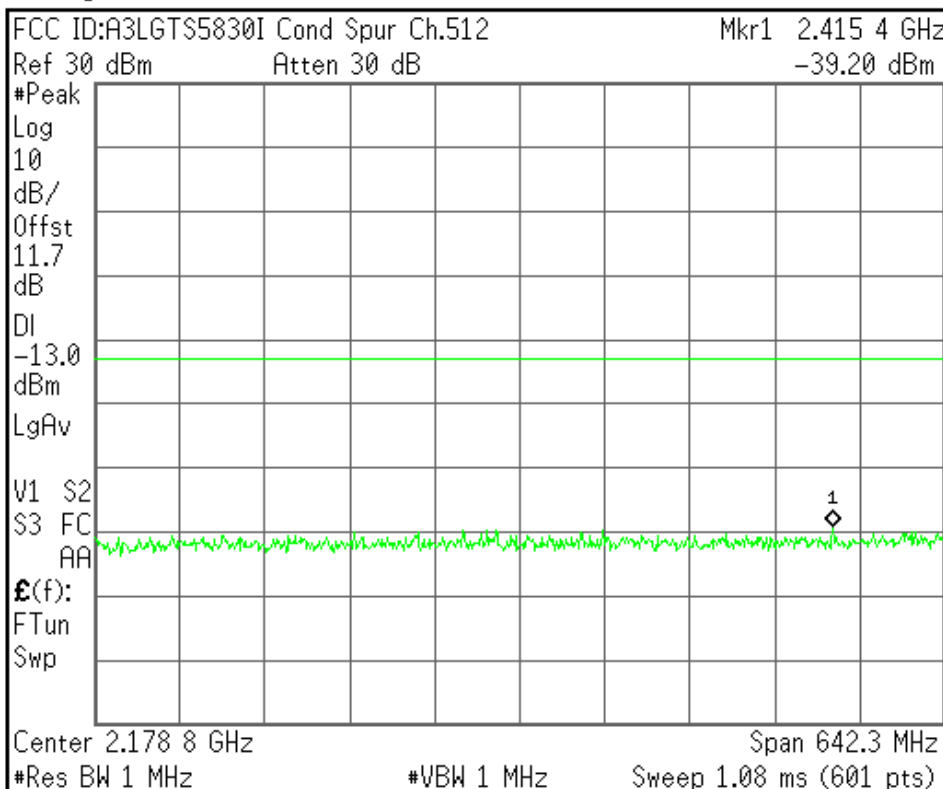

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

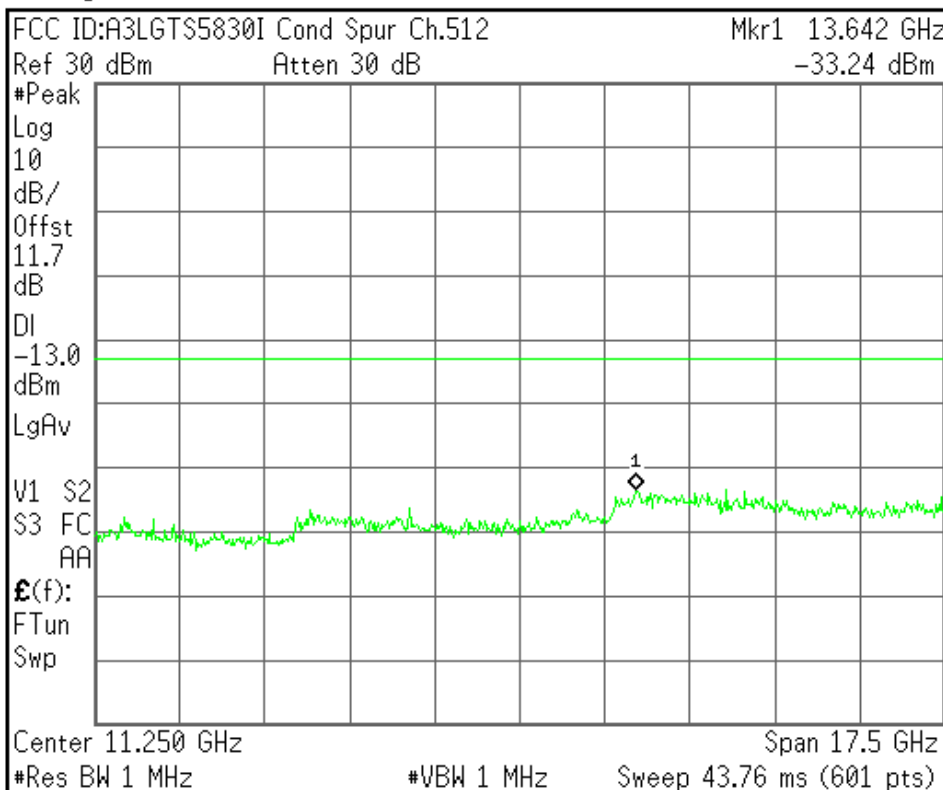

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.661

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.661

Mkr1 1.872 GHz

Ref 30 dBm

Atten 30 dB

-37.09 dBm

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

AA

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
941.250000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.87250000 GHz

CF Step
186.250000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

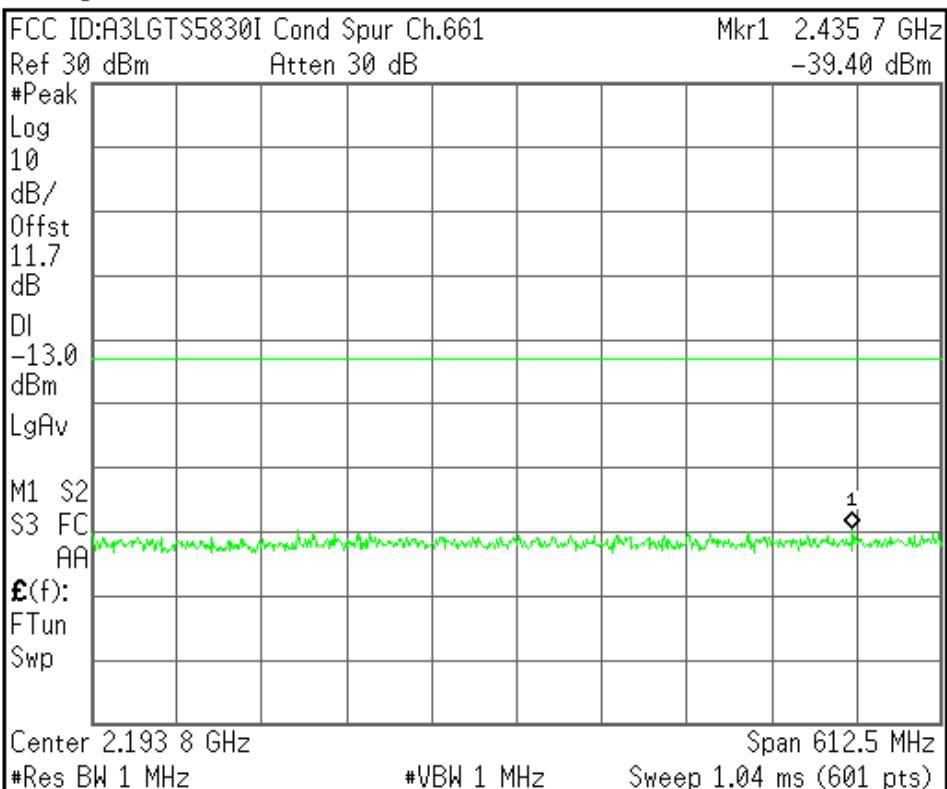

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

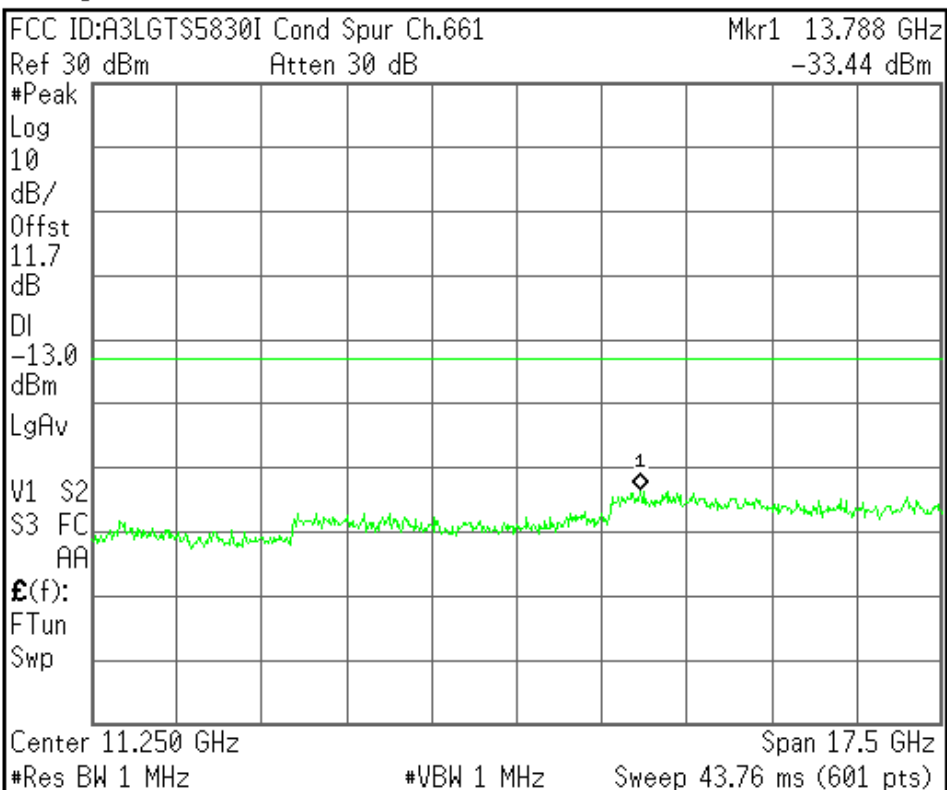

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.810

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Cond Spur Ch.810

Mkr1 1.902 GHz

Ref 30 dBm

Atten 30 dB

-38.54 dBm

#Peak

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
956.150000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.90230000 GHz

CF Step
189.230000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

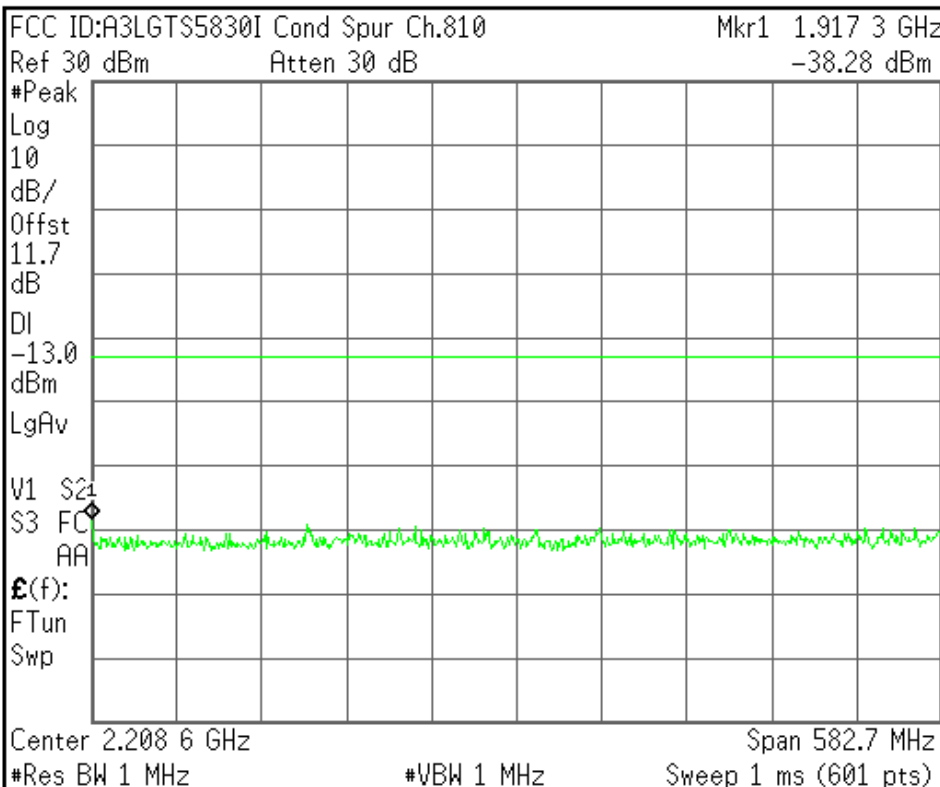

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

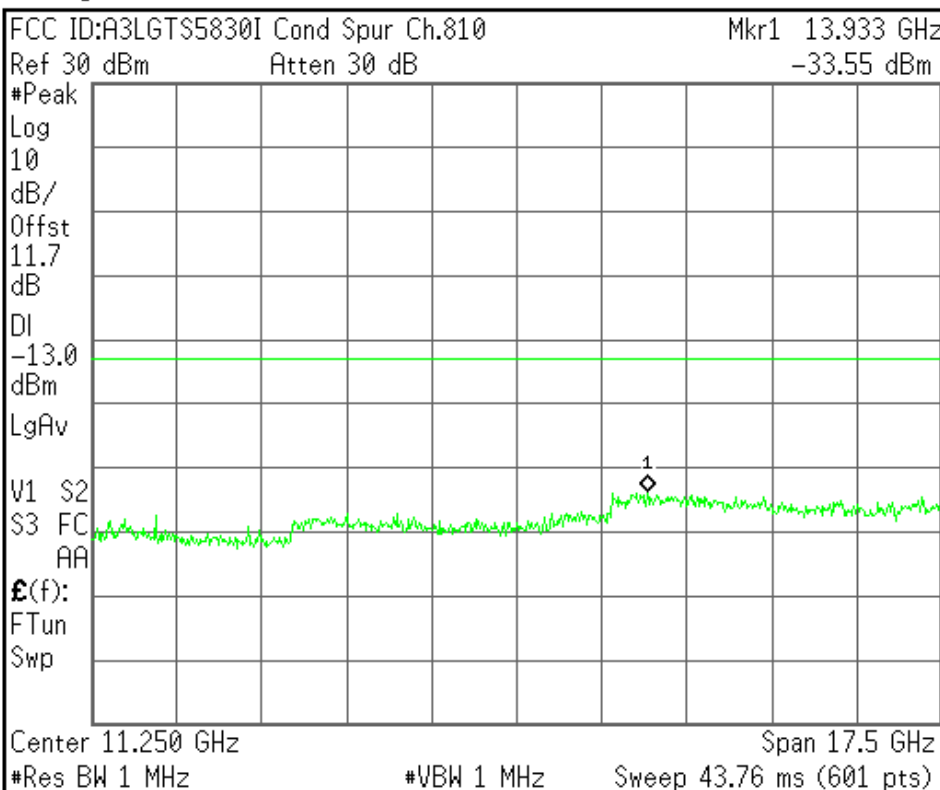

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.00000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Band Edge Ch.512

Ref 30 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

PAvg

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

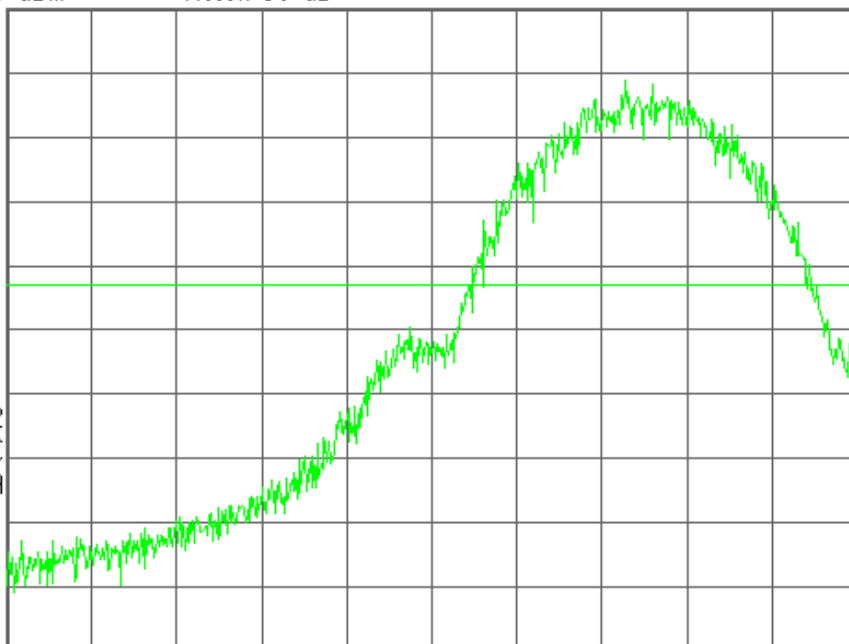

Center 1.850 000 00 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2007 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LGT55830I Band Edge Ch.512

Mkr1 1.849 995 99 GHz

Ref 30 dBm

Atten 30 dB

-17.71 dBm

#Avg

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

PAvg

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

f>50k

Swp

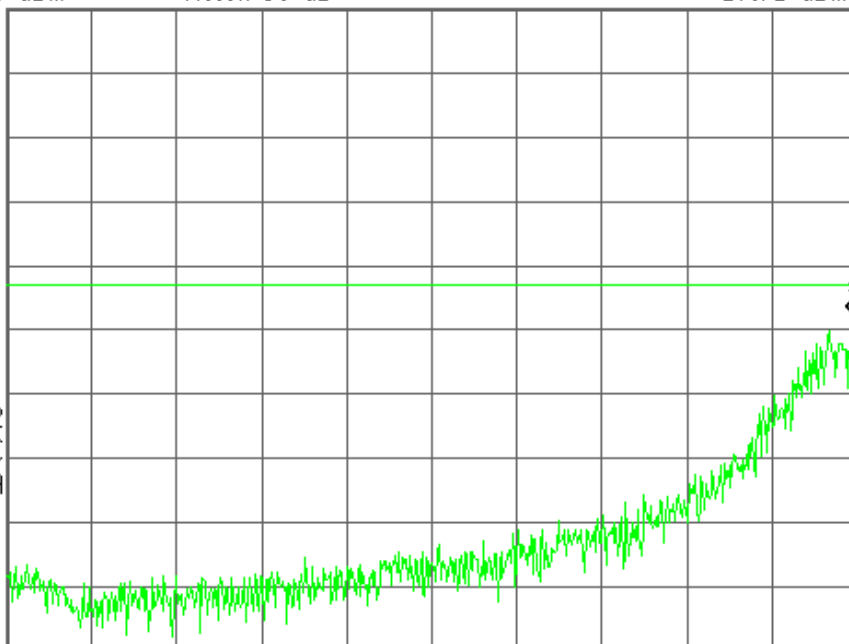

Center 1.849 595 00 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.810

Ref 30 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

PAvg

M1 S2


S3 FC

AA

£(f):

f>50k

Swp

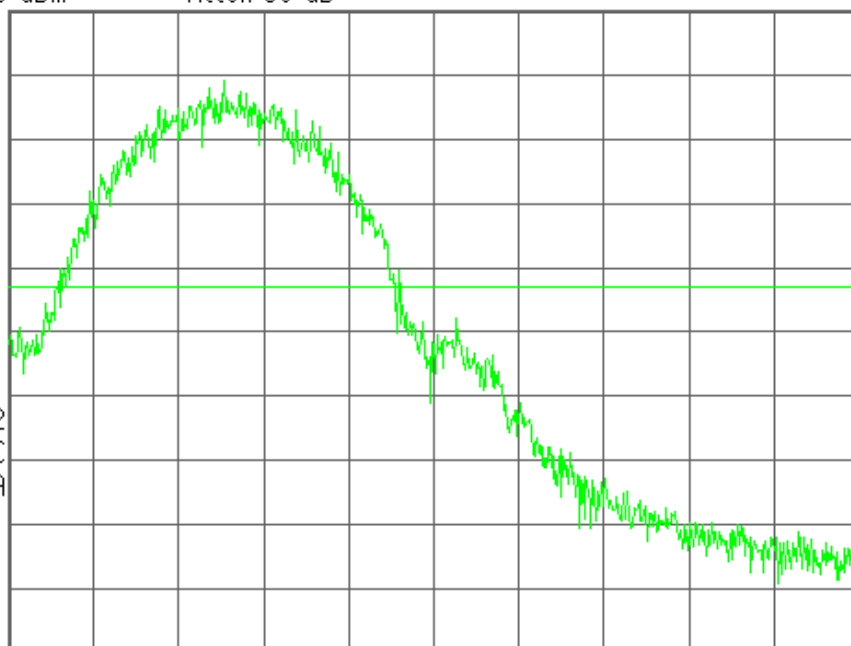

Center 1.910 000 00 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5830I Band Edge Ch.810

Mkr1 1.910 019 00 GHz

Ref 30 dBm

Atten 30 dB

-19.62 dBm

#Avg

Log

10

dB/

Offst

11.7

dB

DI

-13.0

dBm

PAvg

M1 S2


S3 FC

AA

£(f):

f>50k

Swp

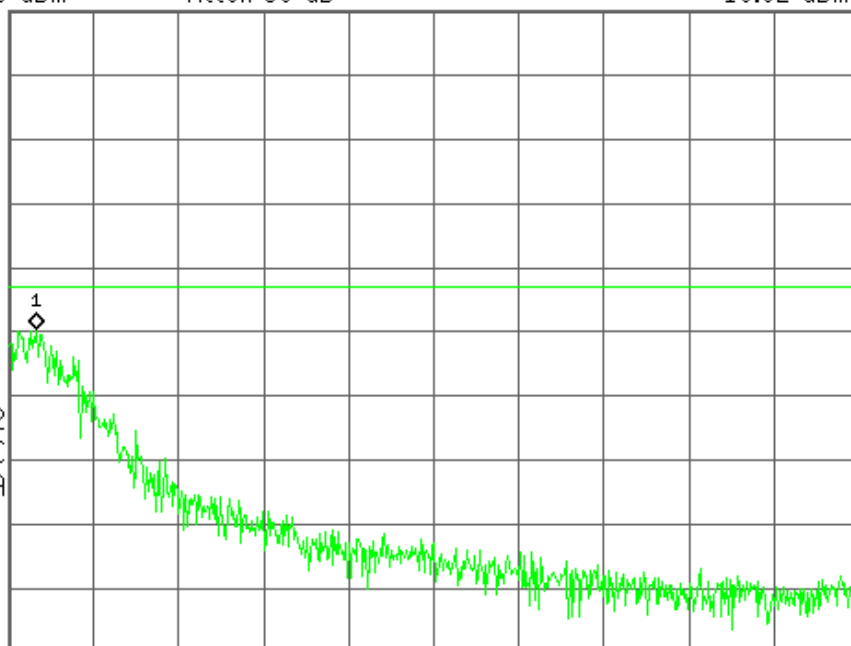

Center 1.910 405 00 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

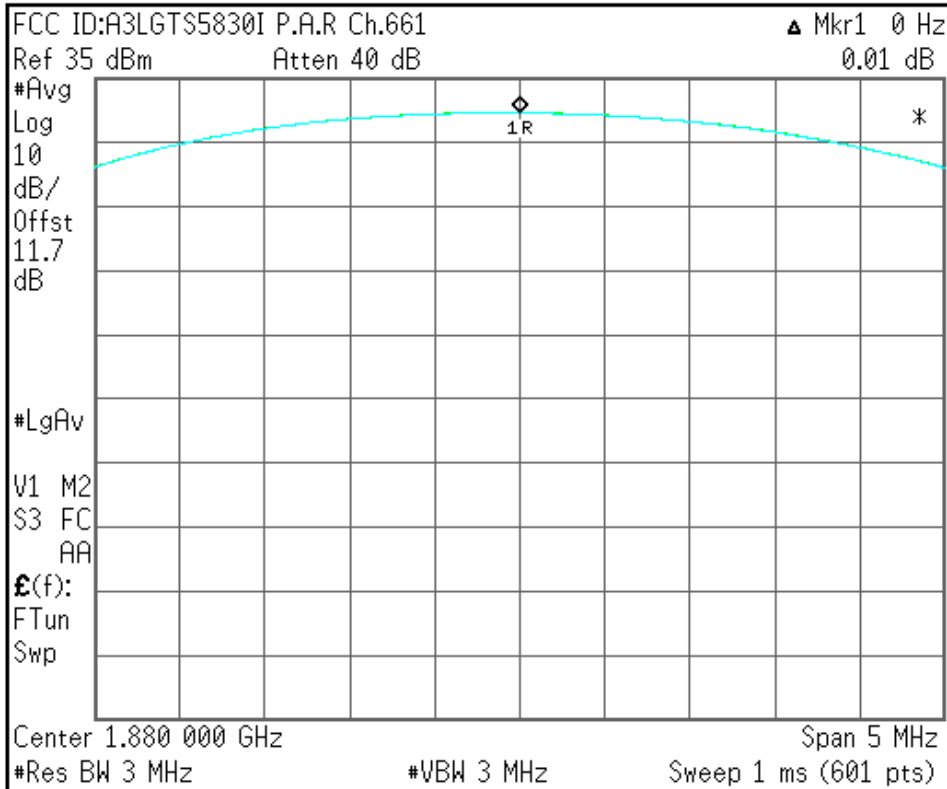

Center Freq 1.88000000 GHz
Start Freq 1.87750000 GHz
Stop Freq 1.88250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved