







6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-37.45	-20	Pass
BLE 1M	2440	-38.21	-20	Pass
BLE 1M	2480	-37.09	-20	Pass
BLE 2M	2402	-40.46	-20	Pass
BLE 2M	2440	-38.04	-20	Pass
BLE 2M	2480	-38.98	-20	Pass


6.2 Test Graphs

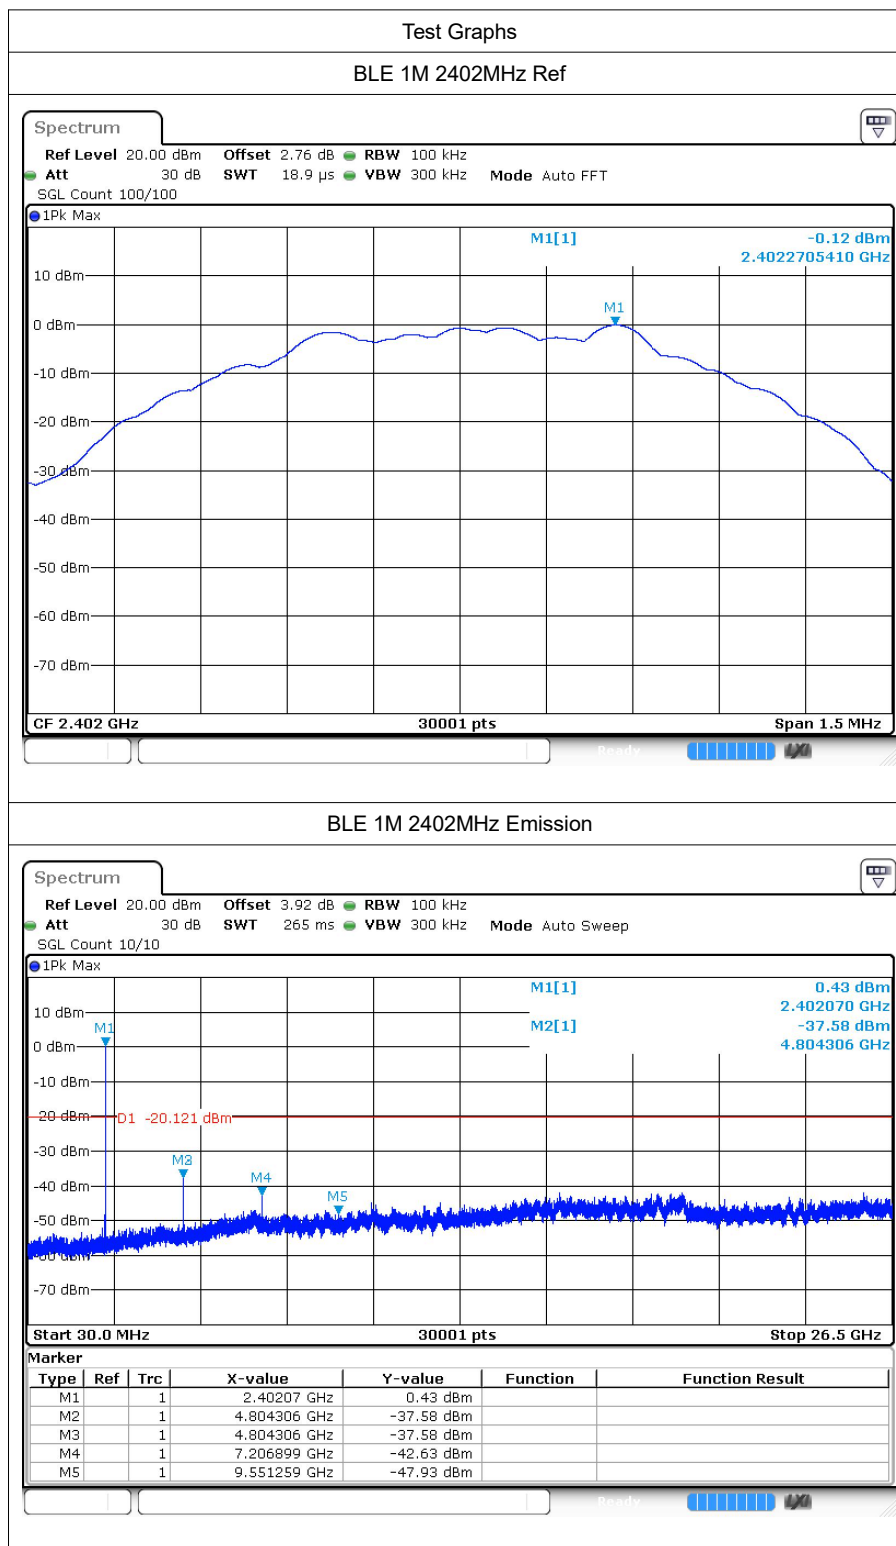


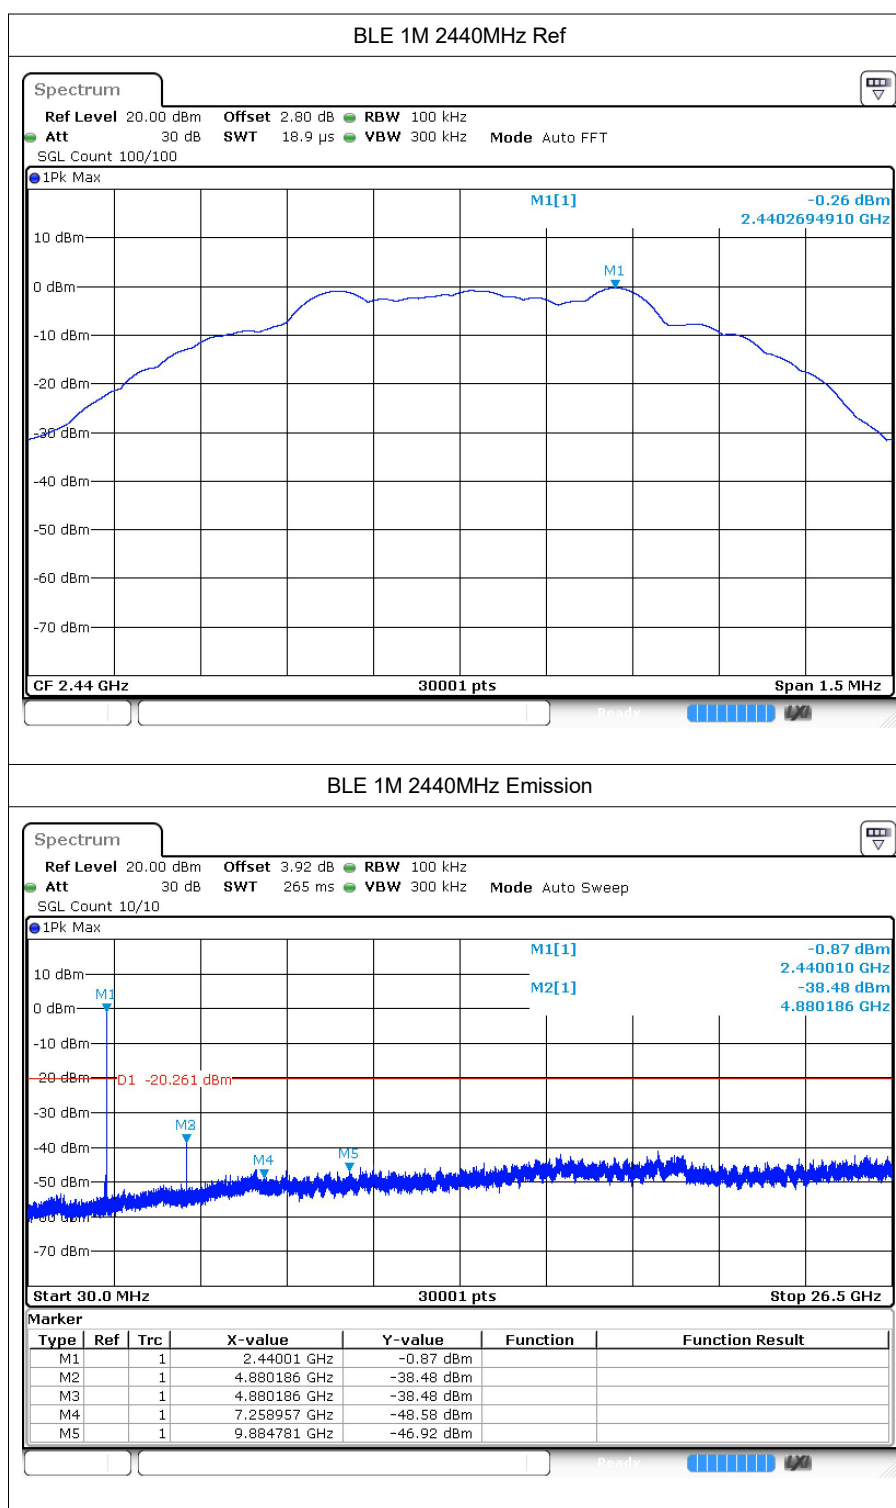

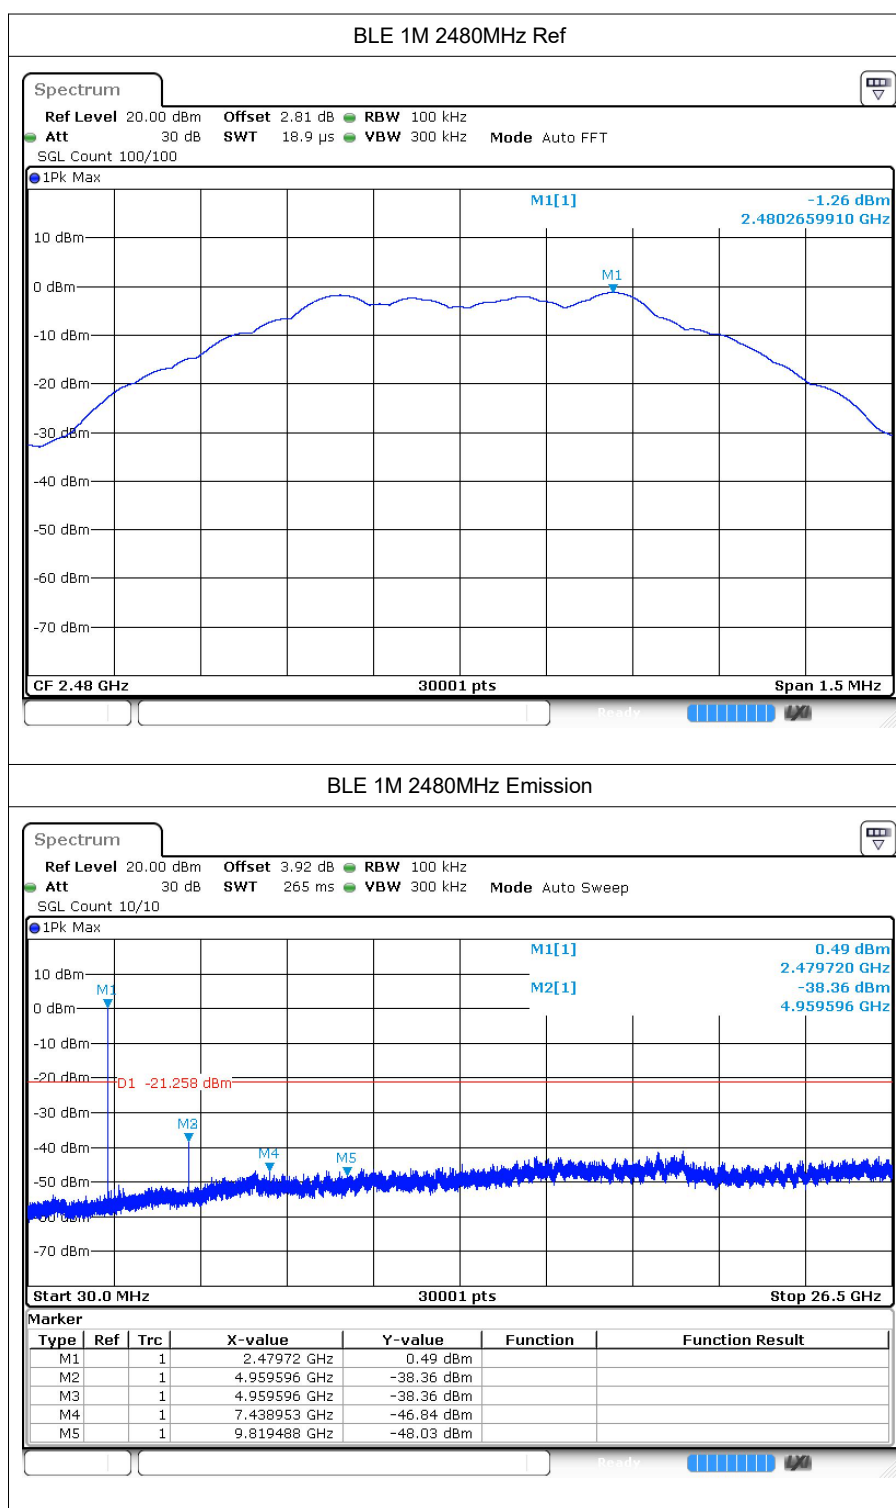

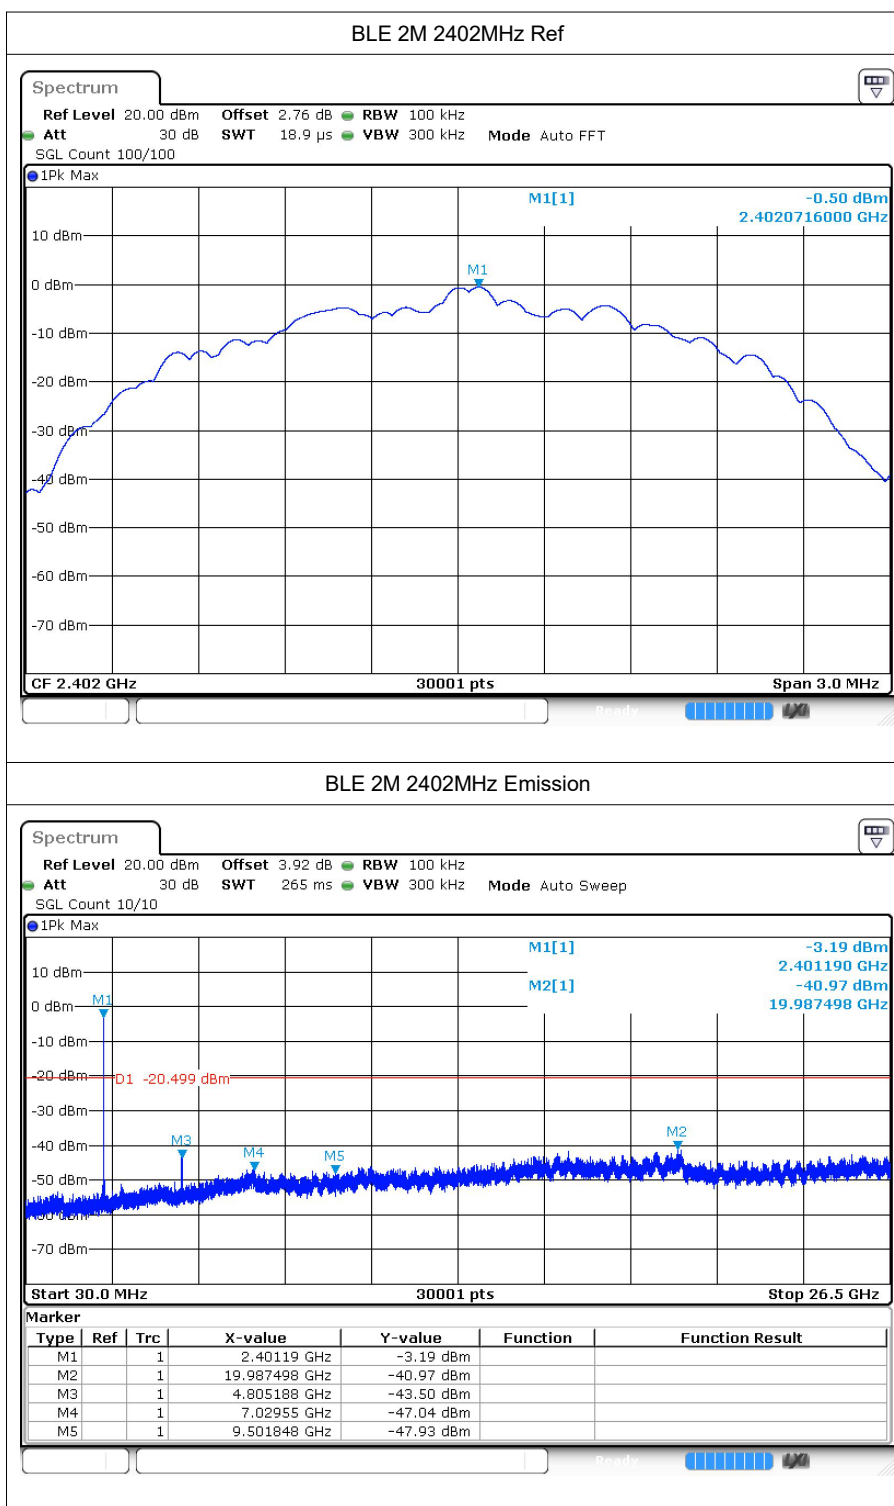

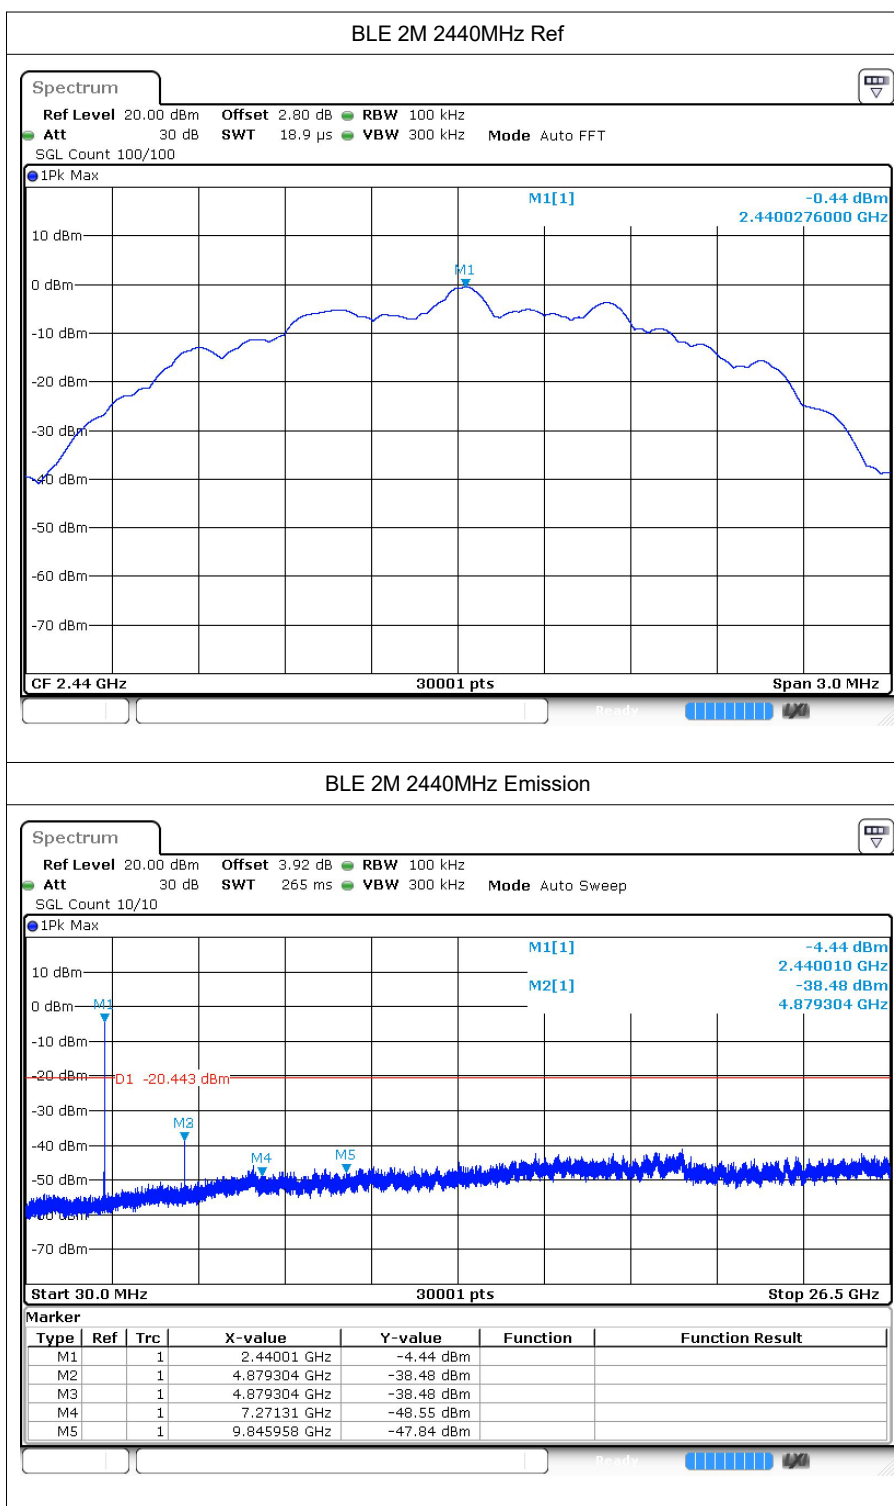

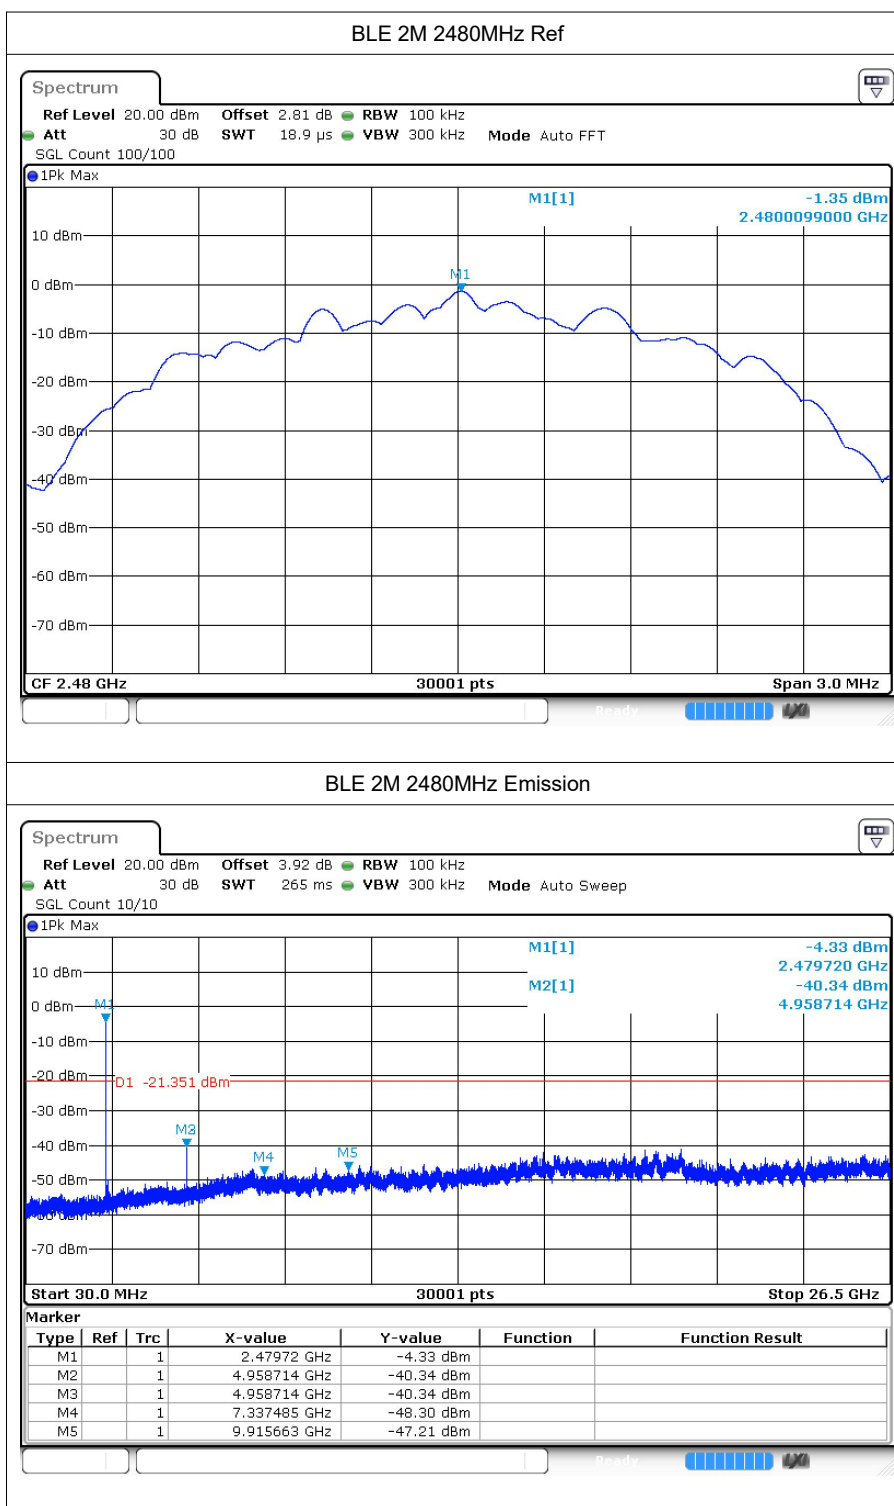





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.77	2	-	47.49	Peak	74	Pass
BLE 1M	2402	2310	-55.16	2	1.73	43.83	Average	54	Pass
BLE 1M	2402	2385.936	-42.23	2	-	55.03	Peak	74	Pass
BLE 1M	2402	2386.032	-50.51	2	1.73	48.48	Average	54	Pass
BLE 1M	2402	2390	-46.75	2	-	50.51	Peak	74	Pass
BLE 1M	2402	2390	-55.89	2	1.73	43.1	Average	54	Pass
BLE 1M	2480	2483.5	-45.47	2	-	51.79	Peak	74	Pass
BLE 1M	2480	2483.5	-52.63	2	1.73	46.36	Average	54	Pass
BLE 1M	2480	2483.608	-45.36	2	-	51.9	Peak	74	Pass
BLE 1M	2480	2483.896	-51.48	2	1.73	47.51	Average	54	Pass
BLE 1M	2480	2500	-49.59	2	-	47.67	Peak	74	Pass
BLE 1M	2480	2500	-55.78	2	1.73	43.21	Average	54	Pass
BLE 2M	2402	2310	-47.58	2	-	49.68	Peak	74	Pass
BLE 2M	2402	2310	-55.89	2	4.46	45.83	Average	54	Pass
BLE 2M	2402	2369.616	-42.24	2	-	55.02	Peak	74	Pass
BLE 2M	2402	2386.032	-52.69	2	4.46	49.03	Average	54	Pass
BLE 2M	2402	2390	-48.78	2	-	48.48	Peak	74	Pass
BLE 2M	2402	2390	-57.59	2	4.46	44.13	Average	54	Pass
BLE 2M	2480	2483.5	-34.41	2	-	62.85	Peak	74	Pass
BLE 2M	2480	2483.5	-52.14	2	4.46	49.58	Average	54	Pass
BLE 2M	2480	2483.584	-34.3	2	-	62.96	Peak	74	Pass
BLE 2M	2480	2484.16	-51.72	2	4.46	50	Average	54	Pass
BLE 2M	2480	2500	-50.31	2	-	46.95	Peak	74	Pass
BLE 2M	2480	2500	-55.8	2	4.46	45.92	Average	54	Pass

7.2 Test Graphs

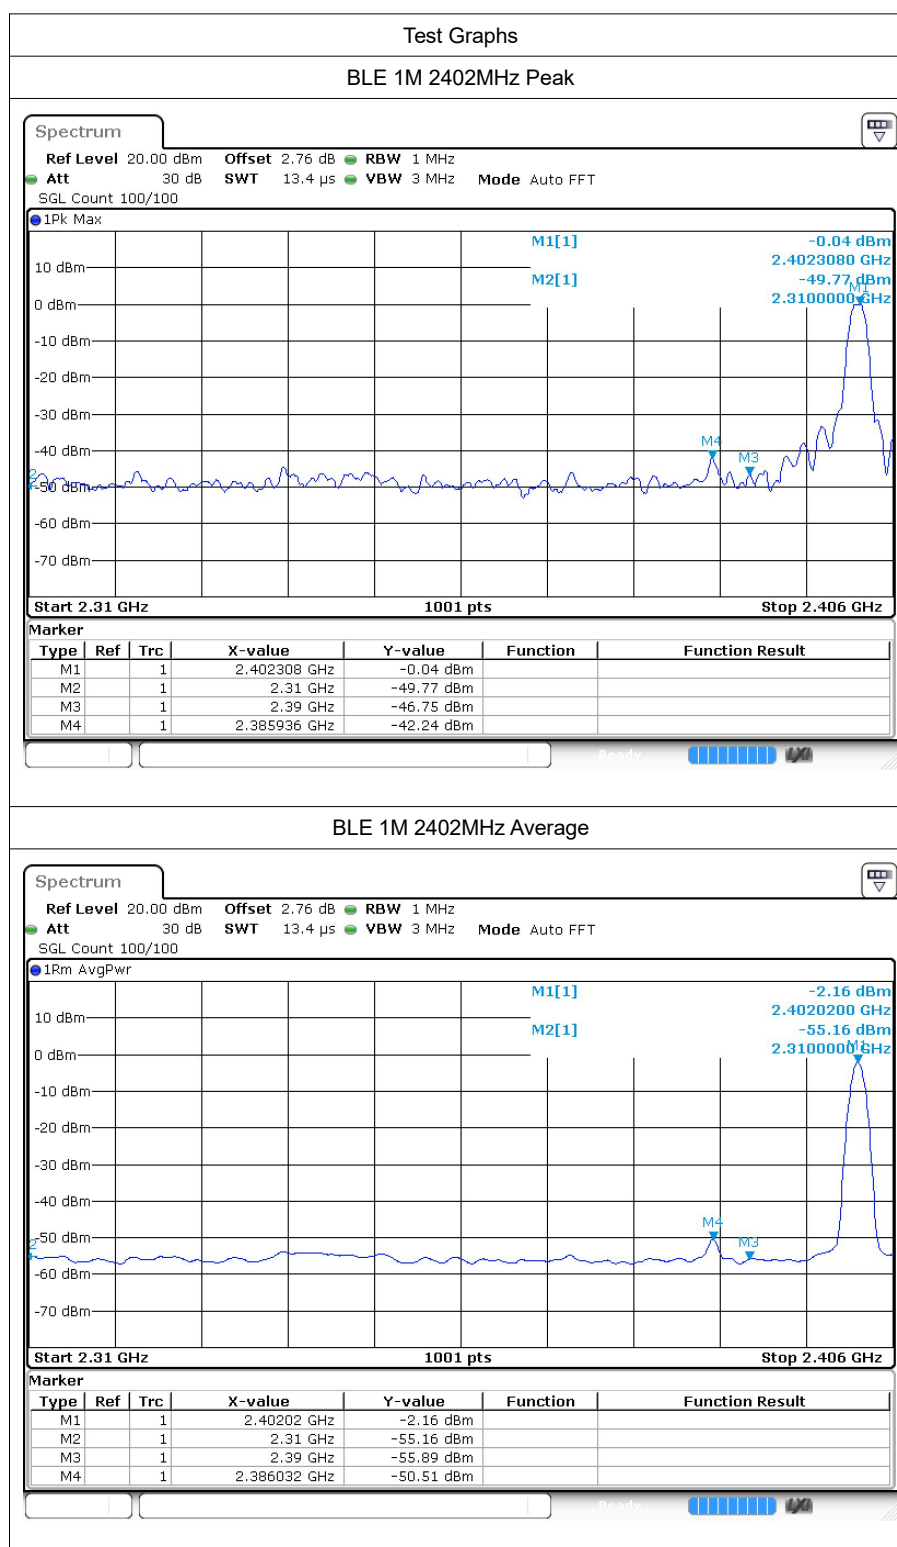

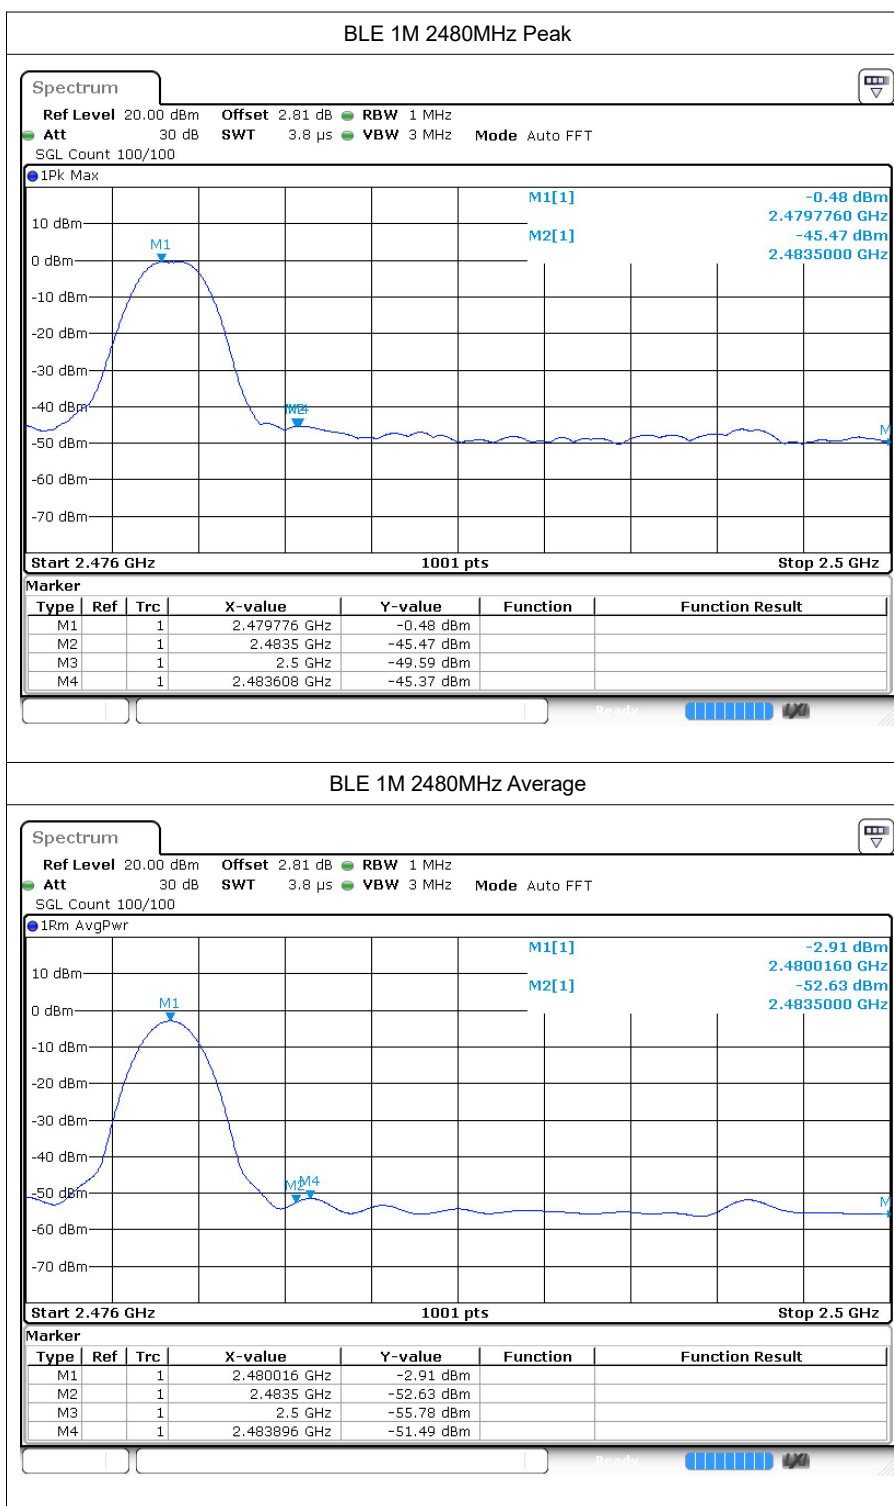

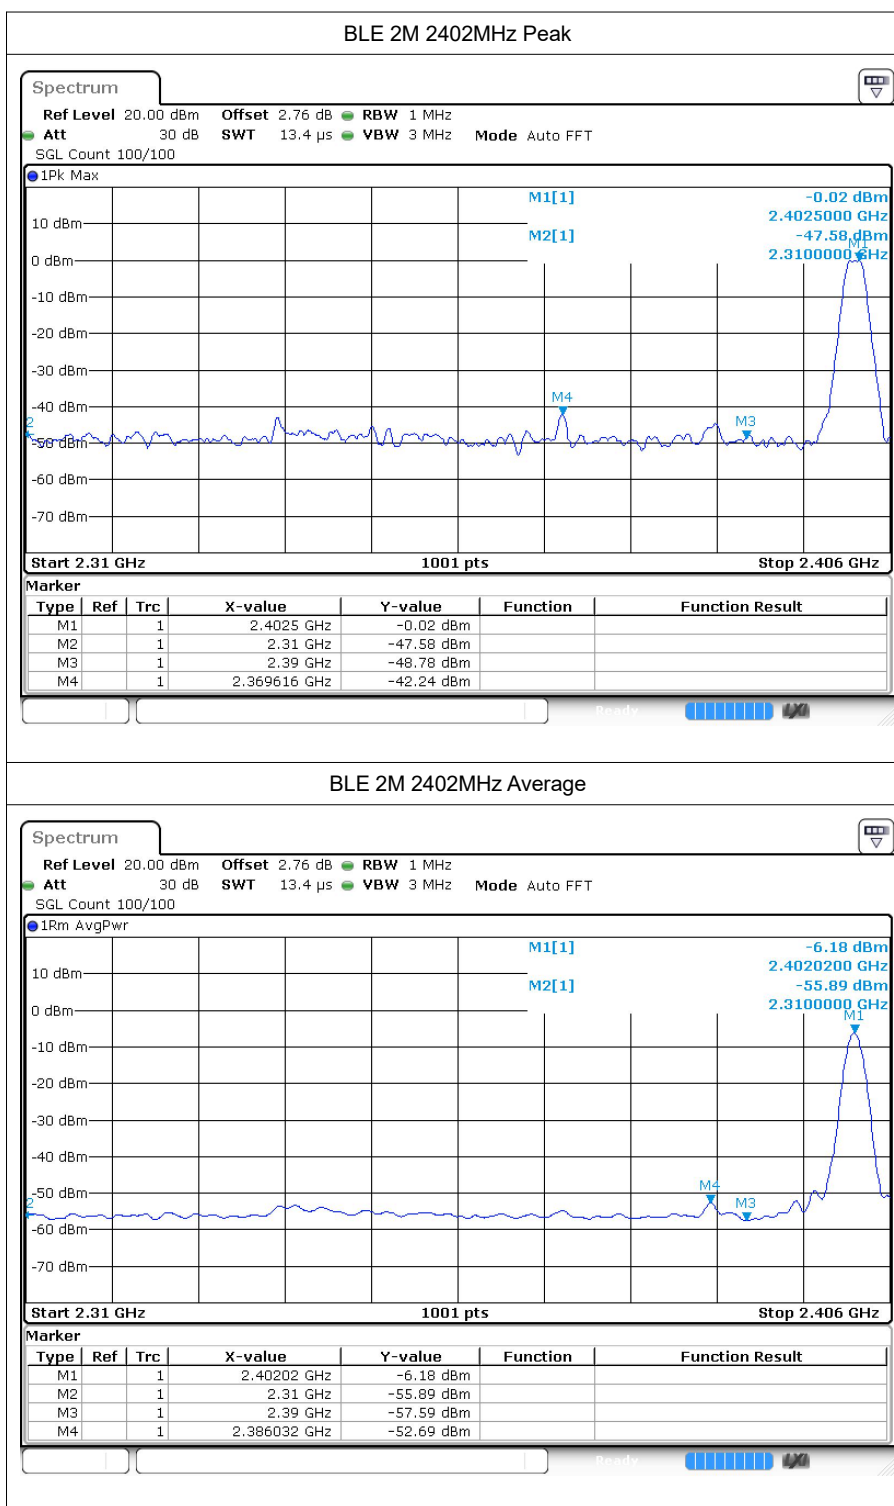

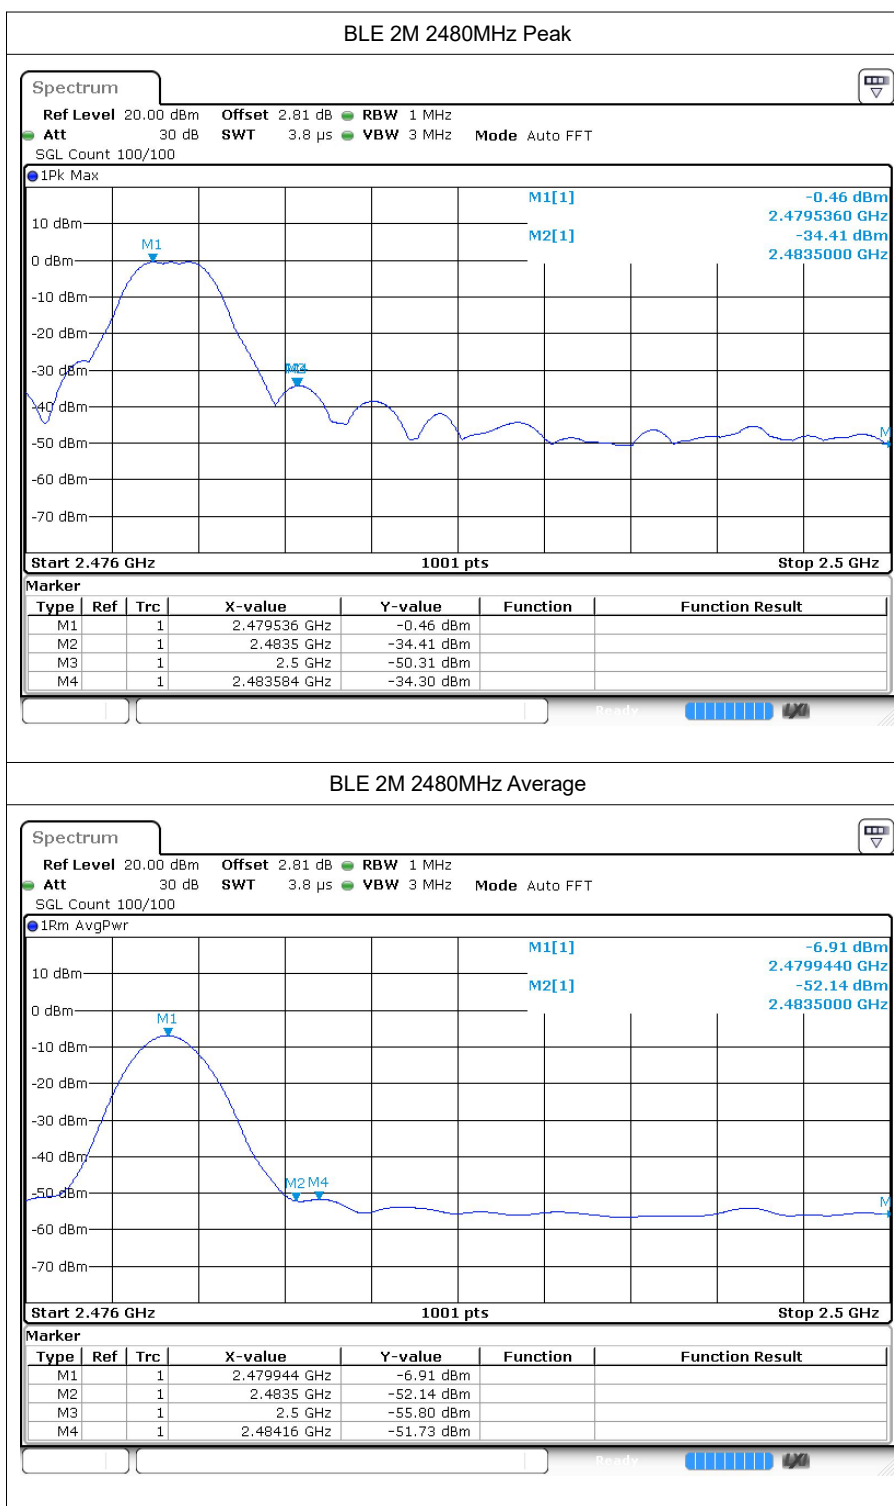

---The End---