



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center

416, Maetan-3dong,
Yeongtong-gu, Suwon-si,
Gyeonggi-do, Korea 443-742

TEST REPORT ON HAC

Model Tested:	SCH-R400
FCC ID (Requested) :	A3LSCHR400
Job No :	AE-017
Report No :	AE-017-M1
Date issued :	July.18, 2007
Result Summary :	M4 (RF EMISSION Category)

- Abstract -

This document reports on HAC Tests carried out in accordance with ANSI C63.19(2006), FCC Rule Part(s) FCC 47 CFR §20.19, §6.3, §7.3

Prepared By

EH JUNG – Test Engineer

Authorized By

JH NAM – Technical Manager



Contents

1. GENERAL INFORMATION.....	3
2. DESCRIPTION OF DEVICE.....	3
3. DESCRIPTION OF TEST EQUIPMENT.....	4
3.1 HAC Measurement Setup.....	4
3.2 Probe Description.....	6
3.3 Test Arch Phantom.....	7
3.4 Validation Dipole.....	7
3.5 Equipment Calibration.....	8
4. HAC MEASUREMENT PROCEDURE.....	9
5. DESCRIPTION OF TEST POSITION.....	11
5.1 Measurement reference and plane.....	11
6. MEASUREMENT UNCERTAINTY.....	12
7. SYSTEM VERIFICATION.....	13
7.1 Test System Validation.....	13
8. MODULATION FACTOR.....	14
8.1 Modulation Factors.....	15
8.2 CW and Modulated Signal Zero-span plots.....	15
9. FCC 3G MEASUREMENTS – MAY/JUNE 2006.....	16
9.1 Handset Capabilities*.....	16
9.2 Worst-Case Probe Location Measurements.....	16
10. Test Results.....	17
10.1 Measurement Results(E-field) - Slide Down.....	17
10.2 Measurement Results(E-field) - Slide Up.....	18
10.3 Measurement Results(H-field) - Slide Down.....	19
10.4 Measurement Results(H-field) - Slide Up.....	20
10.5 Worst-case Configuration Evaluation.....	21
11. REFERENCES.....	22



1. GENERAL INFORMATION

Test Sample : Dual-Band CDMA Phone with Bluetooth

Model Number : SCH-R400

Serial Number : Identical prototype (S/N :# AE-017-K)

Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.

Contact : MS KANG

Phone : +82-31-301-6628

Fax : +82-31-279-7269

Test Standard : ANSI C 63.19 (2006), FCC 47 CFR § 20.19, §6.3, §7.3

FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)

Test Dates : June.19 ,2007 ~ June.20 ,2007

Tested for : FCC/TCB Certification

2. DESCRIPTION OF DEVICE

Tx Freq. Range : 824.70 ~ 848.31 MHz(CDMA)
1851.25 ~ 1908.75 MHz(PCS)

Rx Freq. Range : 869.70 ~ 893.31 MHz(CDMA)
1931.25 ~ 1988.75 MHz(PCS)

Antenna Configuration : SCH-R400

Antenna Manufacturer : GALTRONICS

Antenna Dimensions : 38.10mm*8.03mm*5.38mm



data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server

System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

3.2 Probe Description

ER3DV6 E-Field Probe Description

Construction: One dipole parallel, two dipoles normal to probe axis
Built-in shielding against static charges

Calibration: In air from 100 MHz to 3.0 GHz
(absolute accuracy $\pm 6.0\%$, $k=2$)

Frequency: 100 MHz to > 6 GHz;
Linearity: ± 0.2 dB (100 MHz to 3 GHz)

Directivity ± 0.2 dB in air (rotation around probe axis)
 ± 0.4 dB in air (rotation normal to probe axis)

Dynamic Range 2V/m to 1000V/m
(M3 or better device readings fall well below diode compression point)

Linearity : ± 0.2 dB

Dimensions Overall length: 330 mm (Tip: 16 mm)
Tip diameter: 8 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.5 mm



Figure 3.2 E-field Probe

H3DV6 H-Field Probe Description

Construction: Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges

Frequency: 200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, $k=2$); Output linearized

Directivity: ± 0.25 dB (spherical isotropy error)

Dynamic Range 10mA/m to 2A/m at 1 GHz
(M3 or better device readings fall well below diode compression point)

Dimensions: Overall length: 330 mm (Tip: 40 mm)
Tip diameter: 6 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 3 mm

E-Field Interference < 10% at 3 GHz (for plane wave)



Figure 3.3 H-field Probe

3.3 Test Arch Phantom

Enables easy and well defined positioning of the phone and calibration dipoles as well as simple teaching of the robot (See Figure 3.4)

Dimensions: 370 x 370 x 370 mm

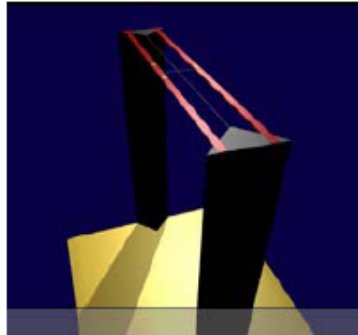


Figure 3.4 Test Arch Phantom

3.4 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Application	- Free space antenna - Hearing Aid susceptibility measurements according to ANSI C 63.19 - Validation of Hearing Aid RF setup for wireless device emission measurement according to ANSI C63.19
Frequency	835 MHz, 1880 MHz, 2450 MHz
Return Loss	< -20 dB at specified validation position
Dimensions	835 MHz : 166 x 330 mm 1880MHz : 80.8 x 330 mm 2450MHz : 59.9 x 330 mm



3.5 Equipment Calibration


Table 3.2 Test Equipment Calibration

Type	Calibration Due Date	Serial No.
Stäubli Robot RX90BL	Not Required	F05/51G6A1/A/01
HAC Phantom	Not Required	1018
SPEAG DAE4	Apr. 12,2008	686
SPEAG E-Field Probe ER3DV6	Apr. 20,2008	2370
SPEAG H-Field Probe H3DV6	Apr. 20,2008	6197
SPEAG Validation Dipole CD835 V3	Mar 15,2009	1021
SPEAG Validation Dipole CD1880 V3	Mar. 21,2009	1016
E4438C Signal Generator	Mar. 21,2008	MY45092224
BBS3Q7ECK Power Amp	Jan. 22,2008	1023
E4419B Power Meter	Jan. 17,2008	MY45101764
E9300B Power Sensor	Feb. 05,2008	MY52505880
DASY4 S/W (ver 4.7)	Not Required	-
Directional Coupler	May 31,2008	18862
Spectrum Analyzer	Mar. 21,2008	MY45304704
Base Station Simulator	Jun. 20,2008	GB45360270

NOTE:

The E-field and H-field probe was calibrated by SPEAG,

4. HAC MEASUREMENT PROCEDURE

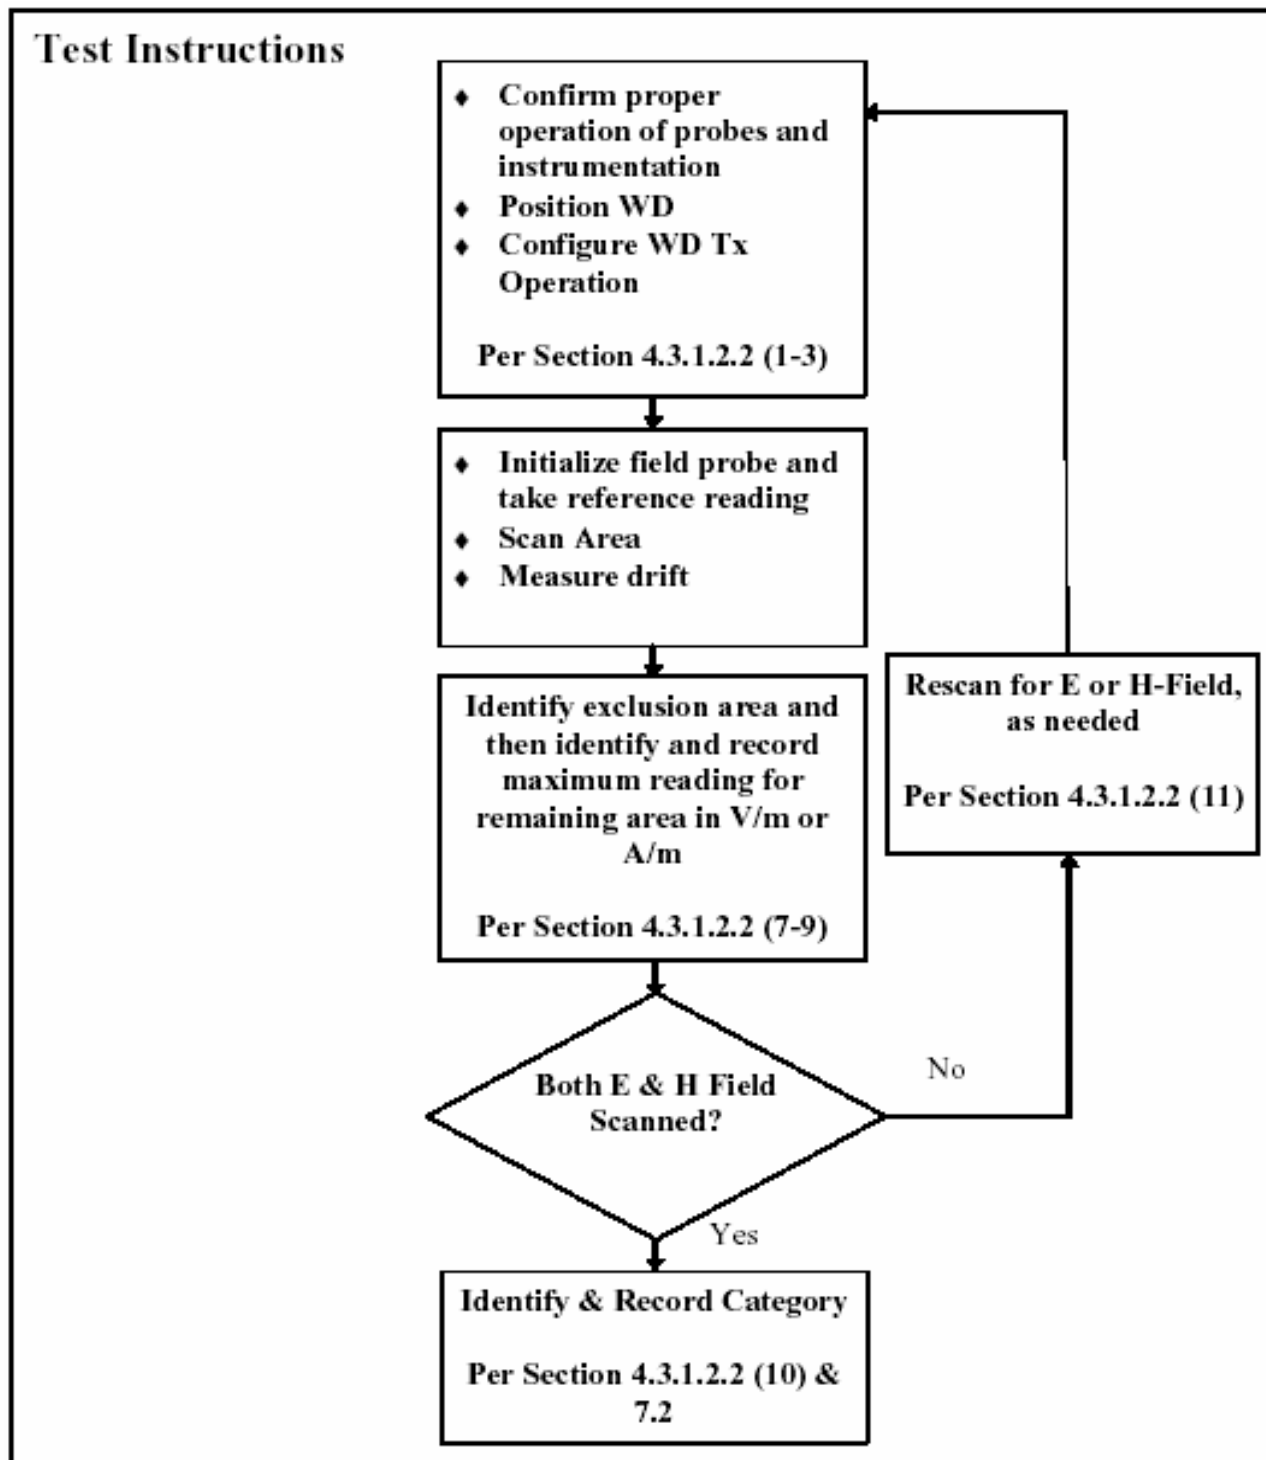



The evaluation was performed using the following procedure.

1. Confirm proper operation of the field probe, probe measurement system, and other instrumentation.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm increments in the 5 x 5 cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1-8 were done for both the E and H-Field measurements.
10. The HAC measurement software calculates a reference point at the start and end of the test to ch



5. DESCRIPTION OF TEST POSITION

5.1 Measurement reference and plane

1. The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
2. The grid is centered on the audio frequency output transducer of the WD (speaker or T- coil).
3. The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
4. The measurement plane is parallel to, and 1.0 cm in front of, the reference plane.



Figure 5.1 Wireless Device and Measurement Plane

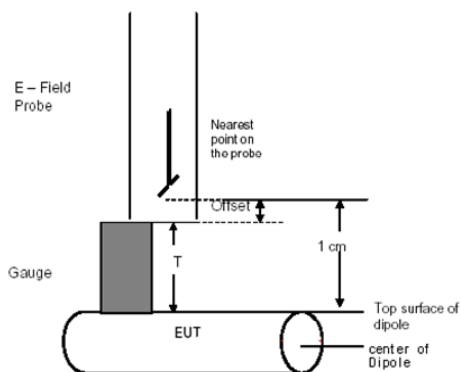


Figure 5.2 Gauge block with E-field probe

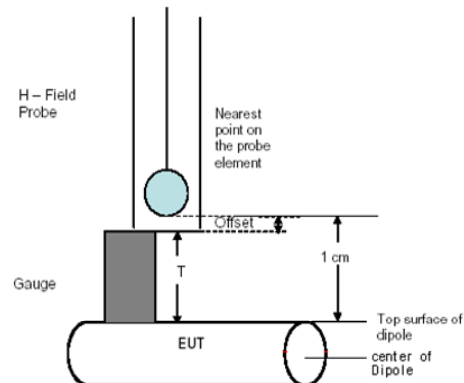


Figure 5.3 Gauge block with H-field probe

6. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Value	Probability distribution	Divisor	c_i E	c_i H	Standard uncertainty		v_i or v_{eff}	
						E	H	E	H
Measurement System									
Probe Calibration	10.20	normal	2.000	0.99	1	5.05	5.10	∞	∞
Axial Isotropy	4.70	rectangular	1.732	1	1	2.71	2.71	∞	∞
Sensor Displacement	16.50	rectangular	1.732	1	0.145	9.53	1.38	∞	∞
Boundary Effects	2.40	rectangular	1.732	1	1	1.39	1.39	∞	∞
Linearity	4.70	rectangular	1.732	1	1	2.71	2.71	∞	∞
Scaling to Peak Envelop Power	2.00	rectangular	1.732	1	1	1.15	1.15	∞	∞
System Detection Limit	1.00	rectangular	1.732	1	1	0.58	0.58	∞	∞
Readout Electronics	0.30	normal	1.000	1	1	0.30	0.30	∞	∞
Response Time	0.80	rectangular	1.732	1	1	0.46	0.46	∞	∞
Integration time	2.60	rectangular	1.732	1	1	1.50	1.50	∞	∞
RF Ambient condition	3.00	rectangular	1.732	1	1	1.73	1.73	∞	∞
RF Reflections	1.74	normal	1.000	1	0.68	1.74	1.19	∞	∞
Probe Positioner	1.20	rectangular	1.732	1	0.67	0.69	0.46	∞	∞
Probe Positioning	4.70	rectangular	1.732	1	0.67	2.71	1.82	∞	∞
Extrap. And Interpolation	1.00	rectangular	1.732	1	1	0.58	0.58	∞	∞
Test Sample Related									
Device Positioning	1.53	normal	1.000	1	0.94	1.53	1.44	23	23
Device Holder and Phantom	2.40	rectangular	1.732	1	1	1.39	1.39	∞	∞
Power Drift	5.00	rectangular	1.732	1	1	2.89	2.89	∞	∞
Phantom and Setup Related									
Phantom Thickness	2.40	rectangular	1.732	1	0.67	1.39	0.93	∞	∞
Combined Standard Uncertainty		normal	-	-	-	12.88	8.38	147117	26396
Expanded Uncertainty [95% confidence]						25.76	16.76		
Expanded Uncertainty [95% confidence] on Field						12.88	8.38		

7. SYSTEM VERIFICATION

7.1 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specification at 835MHz, 1880MHz, by using the system validation kit(s). (see Appendix C, Graphic Plot Attached)

Table 7.2 System Validation Results

Frequency	Targeted E-field (V/m)	Measured E-field (V/m)	Deviation (%)	Targeted H-field (A/m)	Measured H-field (A/m)	Deviation (%)	Date
835 MHz	163.8	154.35	-5.74	0.451	0.413	-8.43	2007.06.19
1880 MHz	133.6	143.65	7.56	0.444	0.431	-2.93	2007.06.19

*Validation was measured with input power 100 mW

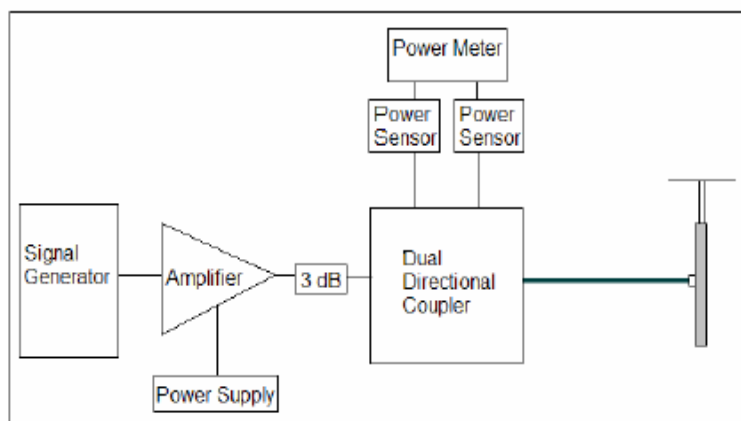


Figure 7.1 Dipole Validation Test Setup

Validations of the DASY4 test system were performed using the measurement equipment listed in Section 3.2. All validations occur in free space using the DASY4 test arch. Note that the 10mm probe to dipole separation is measured from the top edge of the dipole to the calibration reference point of the probe. SPEAG uses the center point of the probe sensor(s) as the reference point when establishing targets for their dipoles. Therefore, because SPEAG's dipoles and targets are used, it is appropriate to measure the 10mm separation distance to the center of the sensors as they do. This reference point was used for validation only. Validations were performed at 835 MHz and/or 1880 MHz. These frequencies are within each operating band and are within 2MHz of the mid-band frequency of the test device. The obtained results from the validations are displayed in the table 7.2.

8. MODULATION FACTOR

After every probe calibration, the response of the probe to each applicable modulated signal (CDMA, GSM, etc) must be assessed at both 835 MHz and 1880 MHz. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. For each PMF assessment, a Signal Generator was used to replace the original CW signal with the desired modulated signal. The PMF results are shown in Tables 5.

RF Field Probe Modulation Response was measured with the field probe and associated measurement equipment. The proposed setup corresponds to the procedure as required in the Standard.

1. Install a validation dipole for the appropriate frequency band under the Test Arch Phantom. Move the probe to the field reference point. Do not move the probe between the corresponding CW and modulated measurements.
2. Install the field probe in the setup.
3. The signal to the dipole must be monitored to record peak amplitude. Set a CW signal to the same level (refer to Appendix B)
4. Set the procedure properties (frequency, modulation frequency and crest factor) according to the measured signal. Define a multimeter job for the field reading.
5. Define a second procedure for the evaluation of the CW signal (frequency set as above, modulation frequency = 0, crest factor = 1) and a multimeter job.
6. The ratio of the CW reading to modulated signal reading is the probe modulation factor(PMF) for the modulation and field probe combination. This was repeated for 80% AM.
7. Steps 1-6 were repeated at all frequency bands and for both E and H field probes.

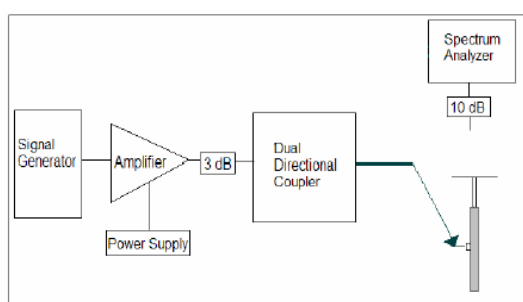


Figure 8.1 Setup to Dipole

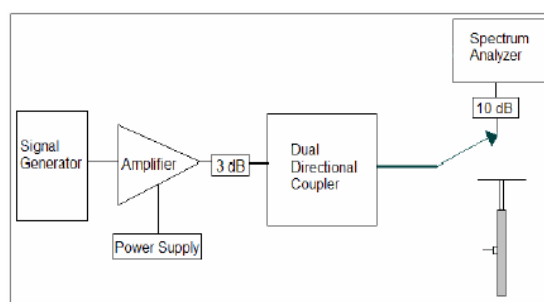






Figure 8.2 Setup to Peak Power using Spectrum Analyzer

8.1 Modulation Factors

Frequency	Protocol	E-field (V/m)	H-field (A/m)	E-Field PMF	H-Field PMF
835 MHz	AM	61.2	0.109	1.57	1.57
835 MHz	CDMA	94.9	0.166	1.01	1.03
835 MHz	CW	96.2	0.171	-	-
1880 MHz	AM	25.8	0.069	1.55	1.54
1880 MHz	CDMA	38.8	0.105	1.03	1.02
1880 MHz	CW	40.0	0.107	-	-
Frequency	Protocol	E-field (V/m)	H-field (A/m)	E-Field PMF	H-Field PMF
1880 MHz	CDMA/SO3	20.8	-	2.680	-
1880 MHz	CW	55.7	-	-	-

Table 8.1 Modulation Factors

8.2 CW and Modulated Signal Zero-span plots:

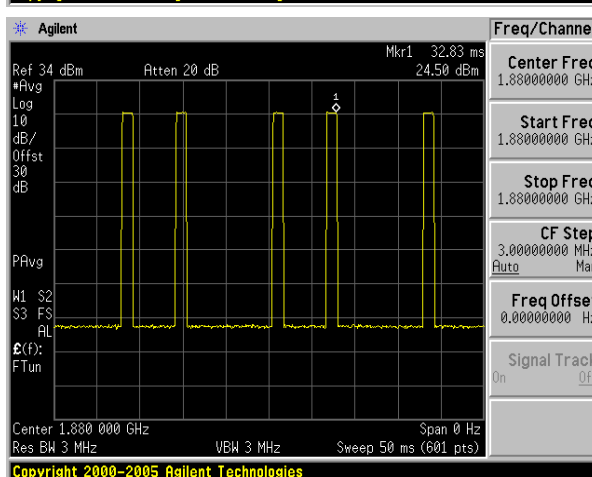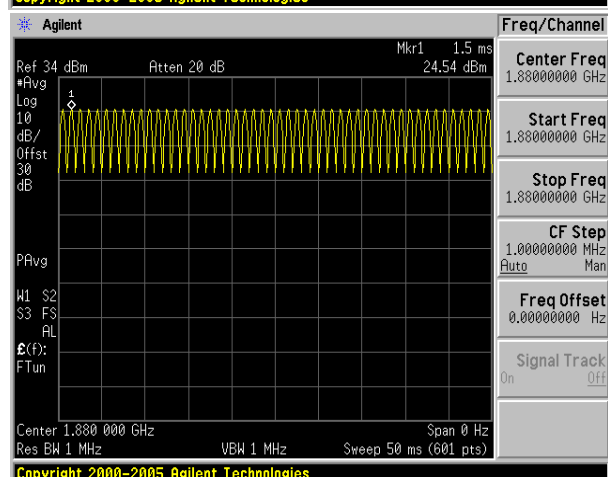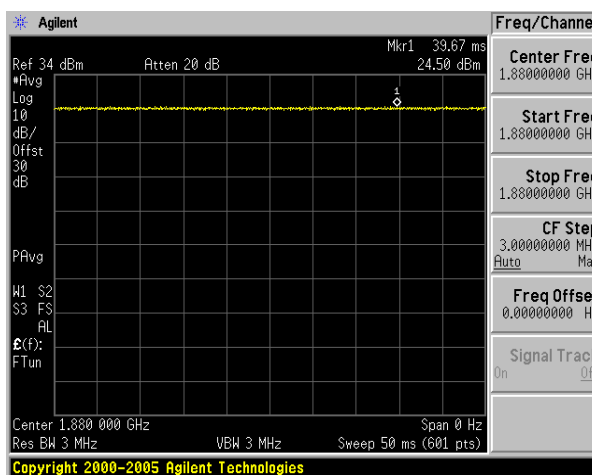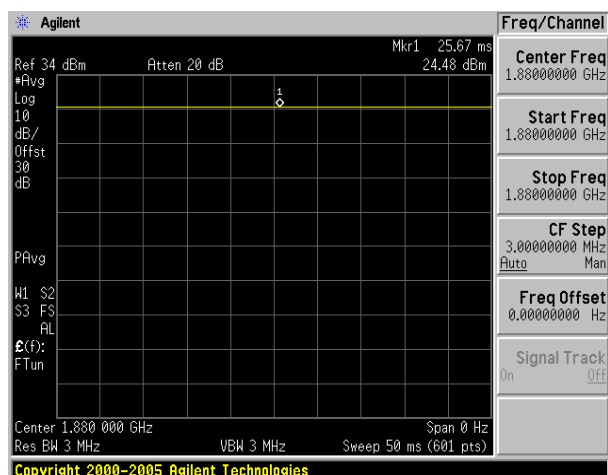




9. FCC 3G MEASUREMENTS – MAY/JUNE 2006

Sample pre-testing of the various modes were performed at the worst case probe location as part of subset testing justification. See below for measured conducted power for applicable device modes.

9.1 Handset Capabilities*

* See Device Capabilities attachment for applicable device modes and powers



9.2 Worst-Case Probe Location Measurements

Below are RC/SO mode investigation results of the device at the worst-case(maximum) field point location.

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [V/m]	Peak Field [V/m]	Peak Field [dBV/m]	Category	FCC limit [dBV/m]	FCC Margin [dB]
E-field Emissions -Slide Up												
PCS	25	off	RC3/SO55	Standard	Intenna	24.4	39.3	40.45	32.14	M4	41.0	-8.86
PCS	25	on	RC3/SO55	Standard	Intenna	24.4	39.1	40.28	32.10	M4	41.0	-8.90
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	39.5	40.63	32.18	M4	41.0	-8.82
PCS	25	off	RC3/SO2	Standard	Intenna	24.6	39.4	40.56	32.16	M4	41.0	-8.84
PCS	25	off	RC1/SO55	Standard	Intenna	24.6	39.1	40.26	32.10	M4	41.0	-8.90
PCS	25	off	RC2/SO9	Standard	Intenna	24.6	39.0	40.20	32.08	M4	41.0	-8.92
PCS	25	off	RC1/SO3	Standard	Intenna	24.6	14.7	39.42	31.91	M4	41.0	-9.09
PCS	25	off	RC3/SO3	Standard	Intenna	24.7	39.4	40.53	32.16	M4	41.0	-8.84
PCS	25	off	RC2/SO17	Standard	Intenna	24.6	14.4	38.62	31.74	M4	41.0	-9.26

Table 9-1 Handset 3G mode variation on RF Emission



10. Test Results

10.1 Measurement Results(E-field) Slide-Down

E-FIELD EMISSIONS:

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [V/m]	Peak Field [V/m]	Peak Field [dBV/m]	Category	FCC limit [dBV/m]	FCC Margin [dB]	Excl Blocks Per 4.3.1.2.2
E-field Emissions													
CDMA	1013	off	RC1/SO2	Standard	Intenna	24.6	87.9	88.80	38.97	M4	51.0	-12.03	None
CDMA	384	off	RC1/SO2	Standard	Intenna	24.3	78.2	79.00	37.95	M4	51.0	-13.05	None
CDMA	777	off	RC1/SO2	Standard	Intenna	24.5	93.7	94.60	39.52	M4	51.0	-11.48	None
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	37.2	38.30	31.66	M4	41.0	-9.34	None
PCS	600	off	RC1/SO2	Standard	Intenna	24.3	27.6	28.40	29.07	M4	41.0	-11.93	None
PCS	1175	off	RC1/SO2	Standard	Intenna	24.4	30.8	31.70	30.02	M4	41.0	-10.98	None

NOTES:

- The test data reported are the worst-case HAC value with the test position set in a typical configuration. Test procedures used are according to ANSI C 63.19 (2006).
- All modes of operation were investigated, and the worst-case results are reported.
- Battery is fully charged for all readings.
- *Power Measured ☒ Conducted
- Battery Option ☒ Standard ☐ Extended ☐ Slim
- Bluetooth deactivated (According to customer's request)

Note: Worst-case measurement evaluated for worst-case 1/8 rate gating condition in RC1/SO3; Mute=Yes



10.2 Measurement Results(E-field) - Slide-Up

E-FIELD EMISSIONS:

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [V/m]	Peak Field [V/m]	Peak Field [dBV/m]	Category	FCC limit [dBV/m]	FCC Margin [dB]	Excl Blocks Per 4.3.1.2.2
E-field Emissions													
CDMA	1013	off	RC1/SO2	Standard	Intenna	24.6	99.1	100.10	40.01	M4	51.0	-10.99	None
CDMA	384	off	RC1/SO2	Standard	Intenna	24.3	81.6	82.40	38.32	M4	51.0	-12.68	None
CDMA	777	off	RC1/SO2	Standard	Intenna	24.5	109.8	110.90	40.90	M4	51.0	-10.10	None
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	39.2	40.40	32.13	M4	41.0	-8.87	None
PCS	600	off	RC1/SO2	Standard	Intenna	24.3	29.8	30.70	29.74	M4	41.0	-11.26	None
PCS	1175	off	RC1/SO2	Standard	Intenna	24.4	29.6	30.50	29.69	M4	41.0	-11.31	None
PCS	25	on	RC1/SO2	Standard	Intenna	24.6	38.4	39.60	31.95	M4	41.0	-9.05	None

NOTES:

- The test data reported are the worst-case HAC value with the test position set in a typical configuration. Test procedures used are according to ANSI C 63.19 (2006).
- All modes of operation were investigated, and the worst-case results are reported.
- Battery is fully charged for all readings.
- *Power Measured ☒ Conducted
- Battery Option ☒ Standard ☐ Extended ☐ Slim
- Bluetooth deactivated (According to customer's request)

Note: Worst-case measurement evaluated for worst-case 1/8 rate gating condition in RC1/SO3; Mute=Yes



10.3 Measurement Results(H-field) - Slide-Down

H-FIELD EMISSIONS:

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [A/m]	Peak Field [A/m]	Peak Field [dBA/m]	Category	FCC limit [dBA/m]	FCC Margin [dB]	Excl Blocks Per 4.3.1.2.2
H-field Emissions													
CDMA	1013	off	RC1/SO2	Standard	Intenna	24.6	0.147	0.151	-16.42	M4	0.6	-17.02	None
CDMA	384	off	RC1/SO2	Standard	Intenna	24.3	0.132	0.136	-17.33	M4	0.6	-17.93	None
CDMA	777	off	RC1/SO2	Standard	Intenna	24.5	0.150	0.155	-16.19	M4	0.6	-16.79	None
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	0.112	0.114	-18.86	M4	-9.4	-9.46	None
PCS	600	off	RC1/SO2	Standard	Intenna	24.3	0.076	0.078	-22.16	M4	-9.4	-12.76	None
PCS	1175	off	RC1/SO2	Standard	Intenna	24.4	0.081	0.083	-21.62	M4	-9.4	-12.22	None

NOTES:

1. The test data reported are the worst-case HAC value with the test position set in a typical configuration. Test procedures used are according to ANSI C 63.19 (2006).
2. All modes of operation were investigated, and the worst-case results are reported.
3. Battery is fully charged for all readings.
4. *Power Measured ☒ Conducted
5. Battery Option ☒ Standard ☐ Extended ☐ Slim
6. Bluetooth deactivated (According to customer's request)

Note: Worst-case measurement evaluated for worst-case 1/8 rate gating condition in RC1/SO3; Mute=Yes



10.4 Measurement Results(H-field) - Slide-Up

H-FIELD EMISSIONS:

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [A/m]	Peak Field [A/m]	Peak Field [dBA/m]	Category	FCC limit [dBA/m]	FCC Margin [dB]	Excl Blocks Per 4.3.1.2.2
H-field Emissions													
CDMA	1013	off	RC1/SO2	Standard	Intenna	24.6	0.147	0.151	-18.56	M4	0.6	-19.16	None
CDMA	384	off	RC1/SO2	Standard	Intenna	24.3	0.132	0.136	-17.33	M4	0.6	-20.95	None
CDMA	777	off	RC1/SO2	Standard	Intenna	24.5	0.150	0.155	-16.19	M4	0.6	-15.12	None
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	0.112	0.114	-18.86	M4	-9.4	-10.51	None
PCS	600	off	RC1/SO2	Standard	Intenna	24.3	0.076	0.078	-22.16	M4	-9.4	-13.33	None
PCS	1175	off	RC1/SO2	Standard	Intenna	24.4	0.081	0.083	-21.62	M4	-9.4	-12.65	None

NOTES:

1. The test data reported are the worst-case HAC value with the test position set in a typical configuration. Test procedures used are according to ANSI C 63.19 (2006).
2. All modes of operation were investigated, and the worst-case results are reported.
3. Battery is fully charged for all readings.
4. *Power Measured ☒ Conducted
5. Battery Option ☒ Standard ☐ Extended ☐ Slim
6. Bluetooth deactivated (According to customer's request)

Note: Worst-case measurement evaluated for worst-case 1/8 rate gating condition in RC1/SO3; Mute=Yes




10.5 Worst-case Configuration Evaluation

PCS E-field Emission -Slide Up

Mode	Channel	Back light	RC/SO	Battery	Antenna	Conducted Power at BS(dBm)	Time Avg. Field [V/m]	Peak Field [V/m]	Peak Field [dBV/m]	Category	FCC limit [dBV/m]	FCC Margin [dB]
E-field Emissions												
PCS	25	off	RC1/SO2	Standard	Intenna	24.6	39.8	41.00	32.26	M4	41.0	-8.74

Peak Reading 360 degree Probe Rotation at Azimuth axis

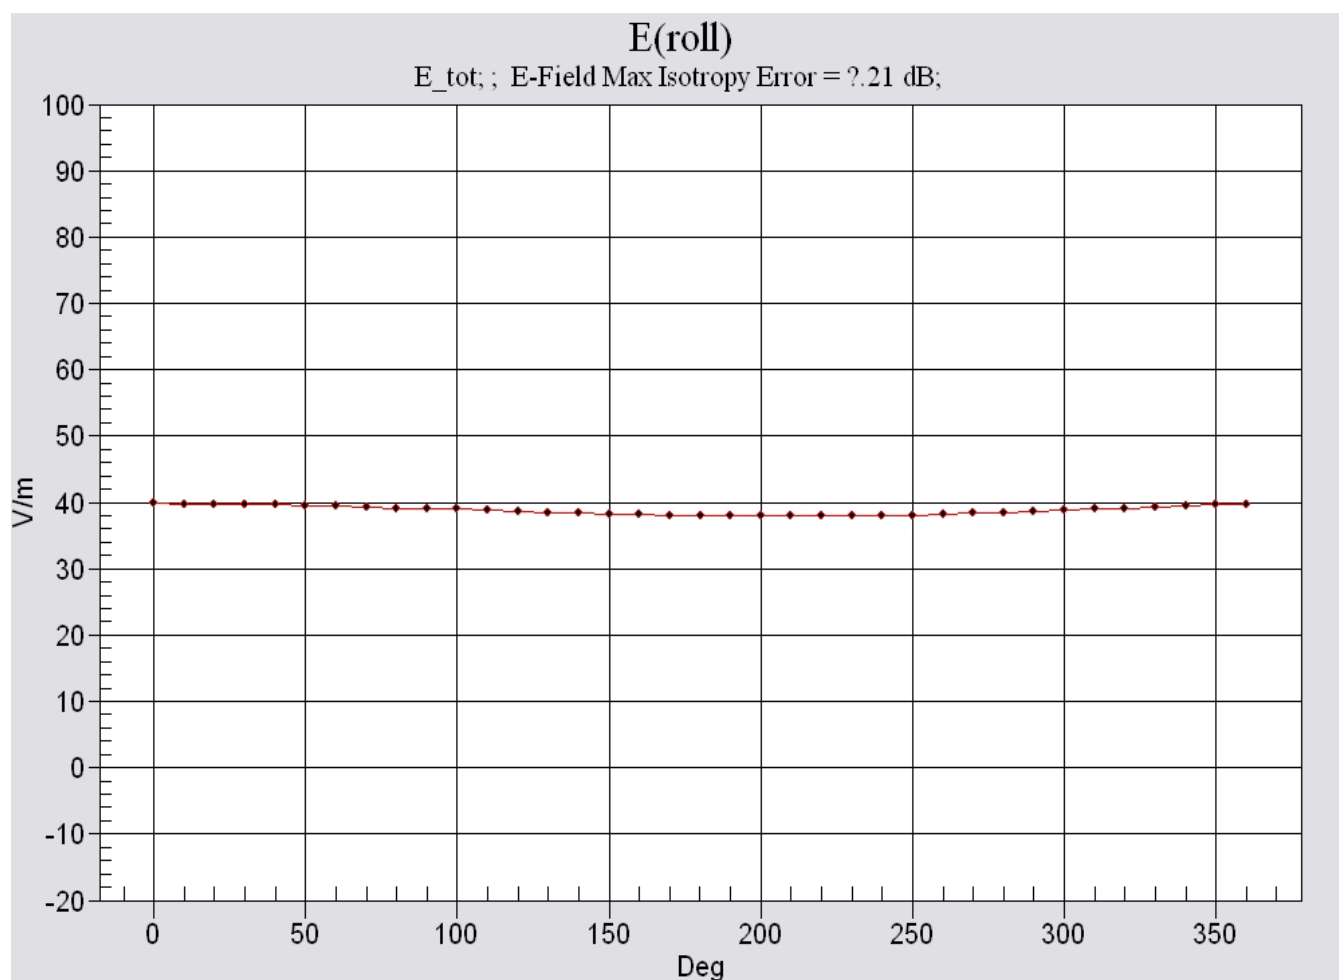

Worst-Case Probe Rotation about Azimuth axis

Note: Location of probe rotation is shown in APPENDIX E



11. REFERENCES

- [1] ANSI C63.19–2006, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, April 2005.
- [2] Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- [3] Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- [4] Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- [5] Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488–491
- [6] Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257–265, 1986.
- [7] Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73–306, Feb. 1973.
- [8] Crawford, M. L. and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- [9] EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical–Audiological Laboratory and Telecom Denmark, October 1993.
- [10] EHIMA GSM Project, Development phase, Part II Project Report. Technical–Audiological Laboratory and Telecom Denmark, June 1994.
- [11] EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical–Audiological Laboratory and Telecom Denmark, 1995.
- [12] FCC WT Docket No. 01–309 (HAC Waiver 05–166). Cingular Wireless LLC Petition for Waiver of Section 20.19(c)(3)(i)(A) of the Commission's Rules, September 8, 2005.
- [13] HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- [14] Hearing Aids/GSM, Report from OTWIDAM, Technical–Audiological Laboratory and Telecom Denmark, April 1993.
- [15] IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.



- [16] Joyner, K. H., et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- [17] Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory Australian Hearing Series, Sydney, 1995.
- [18] Keeker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- [19] Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- [20] Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- [21] Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp.17-43.
- [22] Ma, M. A., Sreenivashiah, I. , and Chang, D. C, "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- [23] McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- [24] Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones," IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- [25] Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- [26] Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- [27] Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.



APPENDIX A

Probe Modulation Factor

Measurement procedure

1. Modulated signal measurement: Connect the modulated signal with the correct frequency via the cable to the dipole.
2. Run the multimeter in the procedure with the corresponding modulation setting in continuous mode.
3. Adjust the signal amplitude to achieve the same field level display in the multimeter as during the WD field scan. Read the multimeter display and note it together with the probe ID, modulation type and frequency.
4. Read the peak envelope on the monitor in order to adjust the CW signal later to the same level.
5. Switch the signal source off and verify that the ambient and instrumentation noise level is at least 10dB lower.
6. CW measurement: Change the signal to CW at the same center frequency, without touching or moving the dipole or probe in the setup.
7. Adjust the CW signal amplitude to the same peak level on the monitor.
8. Run the multimeter in the CW procedure in continuous mode.
9. Read the multimeter display and note it together with the probe ID, modulation type and frequency.
10. Calculate the Probe Modulation Factor as the ratio between the CW multimeter field reading and the for the applicable modulation.
11. Perform the above setup and procedure for E-field and H-field probes.

Spectrum Analyzer setting.

1. Frequency Setting

	CW	GSM	CDMA	WCDMA	AM80%
RBW	Same setting with modulated signal respectively.	1MHz	3MHz	5MHz	1MHz
VBW		1MHz	3MHz	5MHz	1MHz
SPAN		0MHz	0MHz	0MHz	0MHz
DETECTOR		Peak	Average	Average	Peak

3. Trigger: Video or IF trigger, adjusted to give a stable display of the transmission
4. Sweep rate: Sufficiently rapid to permit the transmit pulse to be resolved accurately.

APPENDIX B

ANSI C63.19 (2006)- Telephone near-field categories.

Category	Telephone RF Parameters <960MHz				
Near Field	AWF	E-Field Emissions		H-Field Emissions	
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m
Category	Telephone RF Parameters >960MHz				
Near Field	AWF	E-Field Emissions		H-Field Emissions	
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	<63.1	V/m	<0.19	A/m
	-5	<47.3	V/m	<0.14	A/m

Table B.1 Telephone near-field categories in linear units.

Category	Telephone RF Parameters <960MHz				
Near Field	AWF	E-Field Emissions		H-Field Emissions	
Category M1/T1	0	56 to 61	dB (V/m)	+5.6 to +10.6	dB (A/m)
	-5	53.5 to 58.5	dB (V/m)	+3.1 to +8.1	dB (A/m)
Category M2/T2	0	51 to 56	dB (V/m)	+0.6 to +5.6	dB (A/m)
	-5	48.5 to 53.5	dB (V/m)	-1.9 to +3.1	dB (A/m)
Category M3/T3	0	46 to 51	dB (V/m)	-4.4 to +0.6	dB (A/m)
	-5	43.5 to 48.5	dB (V/m)	-6.9 to -1.9	dB (A/m)
Category M4/T4	0	<46	dB (V/m)	< -4.4	dB (A/m)
	-5	< 43.5	dB (V/m)	< -6.9	dB (A/m)
Category	Telephone RF Parameters >960MHz				
Near Field	AWF	E-Field Emissions		H-Field Emissions	
Category M1/T1	0	46 to 51	dB (V/m)	-4.4 to 0.6	dB (A/m)
	-5	43.5 to 48.5	dB (V/m)	-6.9 to -1.9	dB (A/m)
Category M2/T2	0	41 to 46	dB (V/m)	-9.4 to -4.4	dB (A/m)
	-5	38.5 to 43.5	dB (V/m)	-11.9 to -6.9	dB (A/m)
Category M3/T3	0	36 to 41	dB (V/m)	-14.4 to -9.4	dB (A/m)
	-5	33.5 to 38.5	dB (V/m)	-16.9 to -11.9	dB (A/m)
Category M4/T4	0	<36	dB (V/m)	<-14.4	dB (A/m)
	-5	<33.5	dB (V/m)	<-16.9	dB (A/m)

Table B.2 Telephone near-field categories in logarithmic units.



APPENDIX C

The Validation Measurements

DUT: Dipole 835 MHz; Serial: CD835V3 - SN:1021
Program Name: HAC E Dipole
Procedure Name: E Scan 10mm above CD 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 154.7 V/m


Probe Modulation Factor = 1.00

Reference Value = 116.2 V/m; Power Drift = 0.002 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
146.3	154.0	151.9
Grid 4	Grid 5	Grid 6
81.4	85.5	84.6
Grid 7	Grid 8	Grid 9
147.0	154.7	152.1

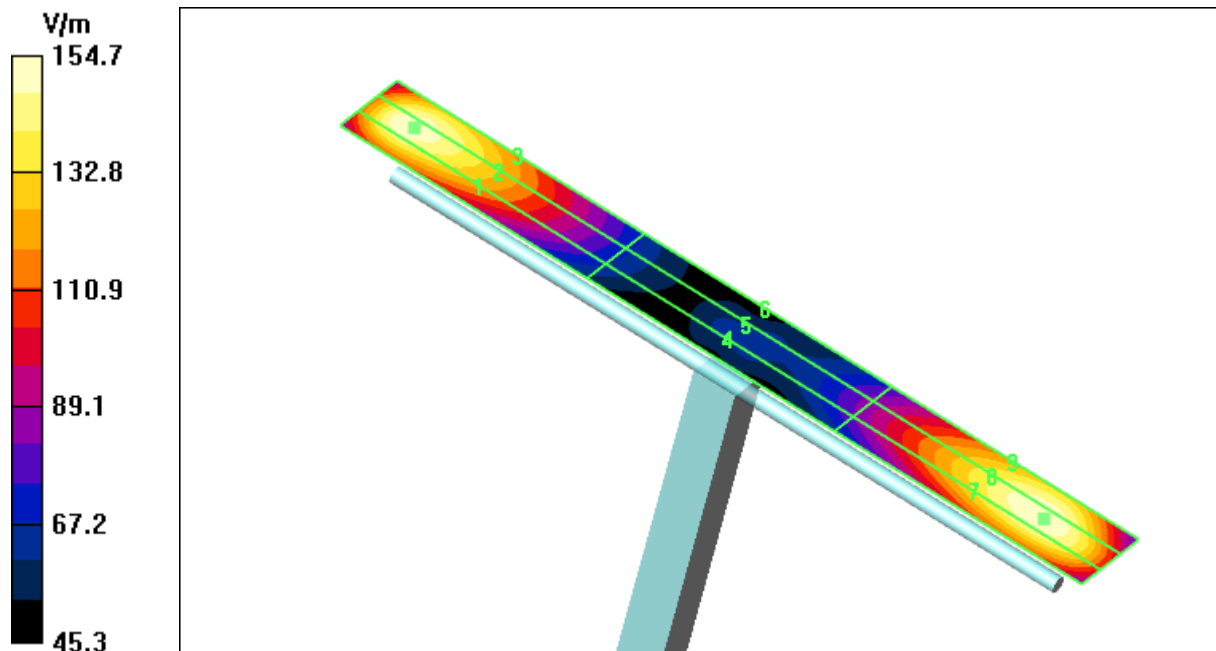

DUT: Dipole 835 MHz; Serial: CD835V3 - SN:1021
Program Name: HAC H Dipole
Procedure Name: H Scan 10mm above CD 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.413 A/m


Probe Modulation Factor = 1.00

Reference Value = 0.433 A/m; Power Drift = 0.009 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.345	0.374	0.365
Grid 4	Grid 5	Grid 6
0.381	0.413	0.402
Grid 7	Grid 8	Grid 9
0.329	0.353	0.346

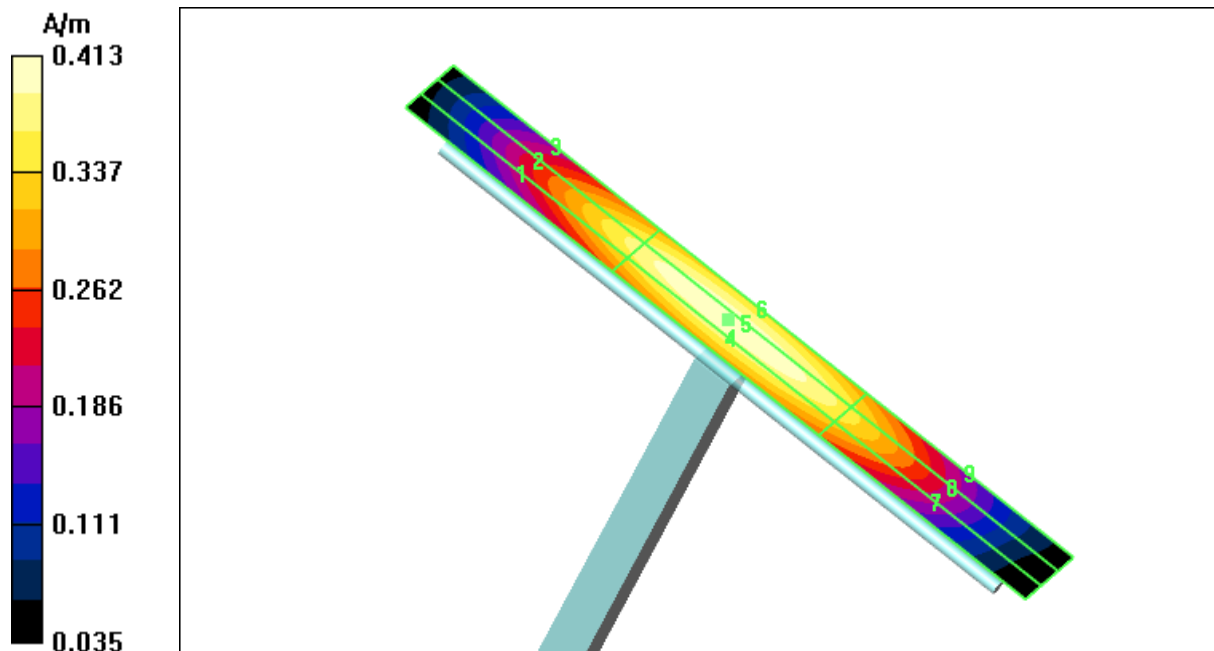

DUT: HAC Dipole 1880 MHz; Serial: SN:1016
Program Name: HAC E Dipole
Procedure Name: E Scan 10mm above CD 1880 MHz


Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Dipole Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 147.5 V/m
Probe Modulation Factor = 1.00
Reference Value = 150.7 V/m; Power Drift = -0.001 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
135.3	139.8	135.8
Grid 4	Grid 5	Grid 6
93.9	100.2	99.2
Grid 7	Grid 8	Grid 9
140.5	147.5	144.8

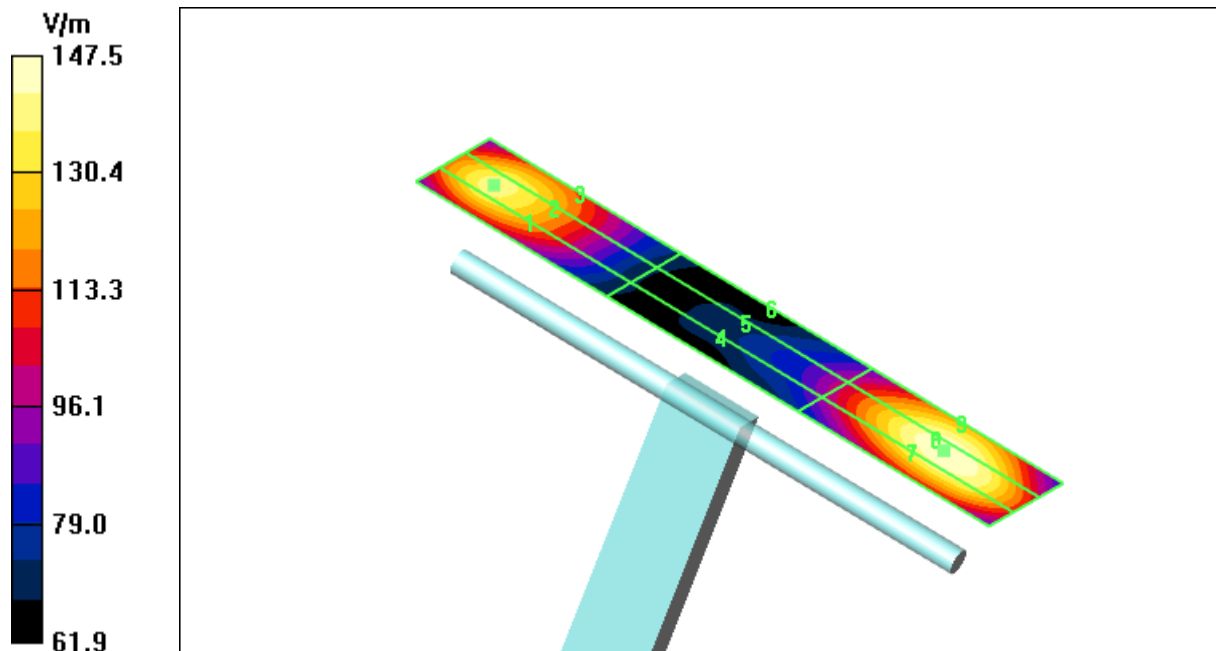

DUT: HAC Dipole 1880 MHz; Serial: SN:1016
Program Name: HAC H Dipole
Procedure Name: H Scan 10mm above CD 1880 MHz


Communication System: CW; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Dipole Section

DASY4 Configuration:
- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.431 A/m
Probe Modulation Factor = 1.00
Reference Value = 0.431 A/m; Power Drift = 0.021 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.381	0.411	0.401
Grid 4	Grid 5	Grid 6
0.404	0.431	0.422
Grid 7	Grid 8	Grid 9
0.350	0.370	0.363

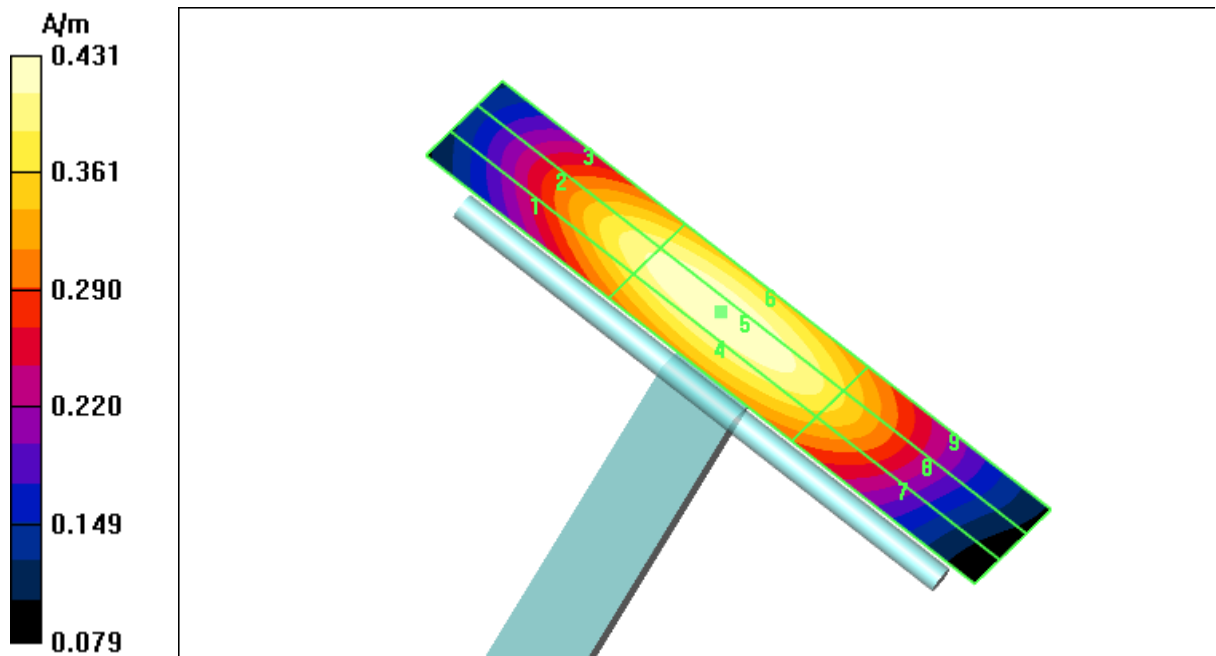



APPENDIX D

Plots of The HAC Measurements

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) E-Field, Slide Down, Date: June/19/2007
Procedure Name: Ch.1013, Ant, Intenna, Bat. Standard


Communication System: CDMA(HAC); Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1013, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:
dx=2mm, dy=2mm
Maximum value of peak Total field = 88.8 V/m
Probe Modulation Factor = 1.01
Reference Value = 88.1 V/m; Power Drift = -0.048 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
67.9	83.4	83.2
Grid 4	Grid 5	Grid 6
73.9	88.8	88.5
Grid 7	Grid 8	Grid 9
69.7	84.5	84.0

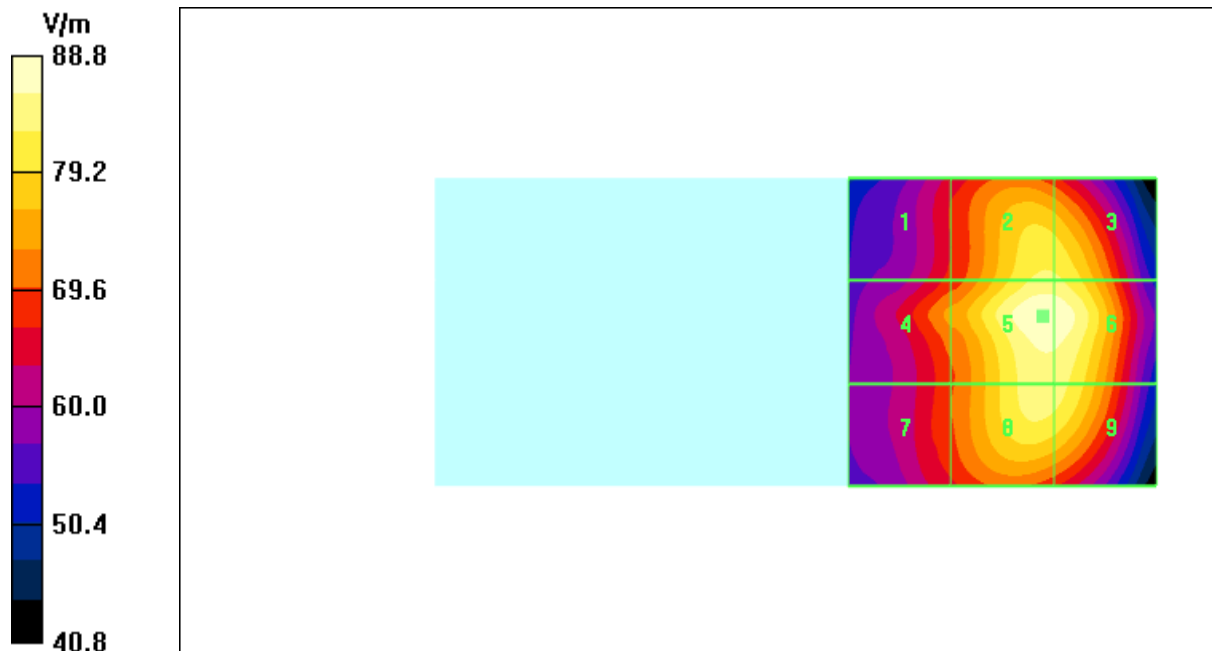

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) E-Field, Slide Down, Date: June/19/2007
Procedure Name: Ch.0384, Ant, Intenna, Bat. Standard


Communication System: CDMA(HAC); Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.0384, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:
dx=2mm, dy=2mm
Maximum value of peak Total field = 79.0 V/m
Probe Modulation Factor = 1.01
Reference Value = 75.4 V/m; Power Drift = 0.183 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
59.1	74.4	74.2
Grid 4	Grid 5	Grid 6
64.1	79.0	78.7
Grid 7	Grid 8	Grid 9
60.1	74.6	74.3

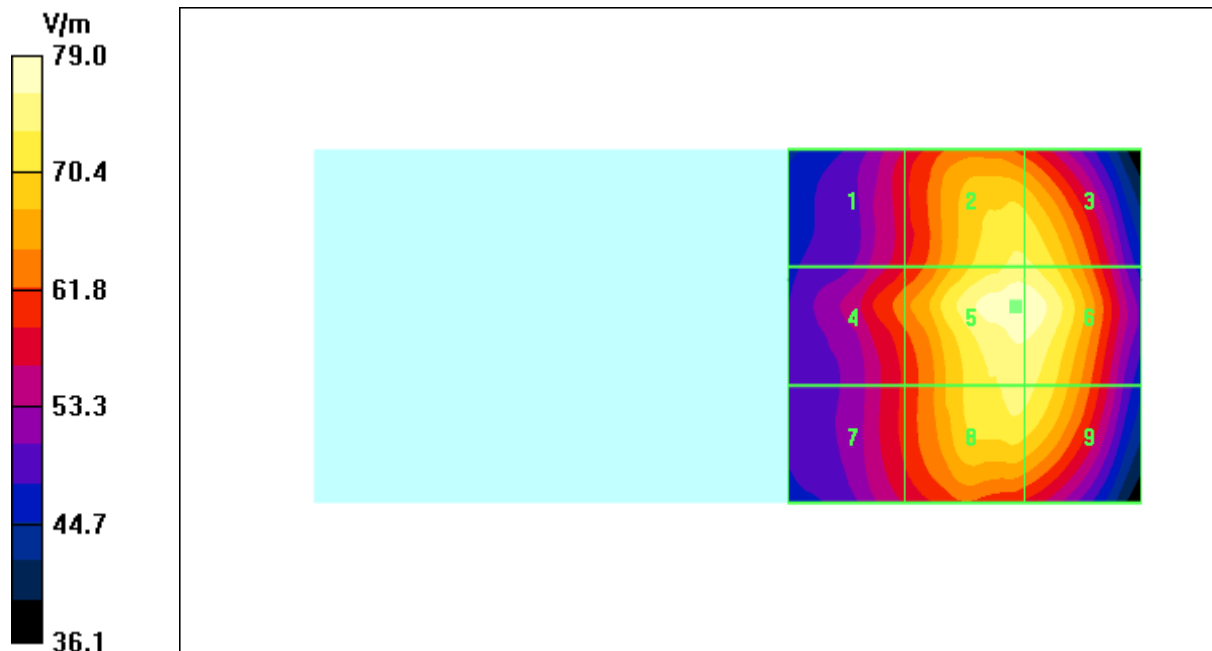

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) E-Field, Slide Down, Date: June/19/2007
Procedure Name: Ch.777, Ant, Intenna, Bat. Standard


Communication System: CDMA(HAC); Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn686; Calibrated: 2006-11-20
 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
 - Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.777, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:
 dx=2mm, dy=2mm
 Maximum value of peak Total field = 94.6 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 93.9 V/m; Power Drift = 0.123 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
73.1	89.3	89.0
Grid 4	Grid 5	Grid 6
78.8	94.6	94.1
Grid 7	Grid 8	Grid 9
72.2	88.0	87.5

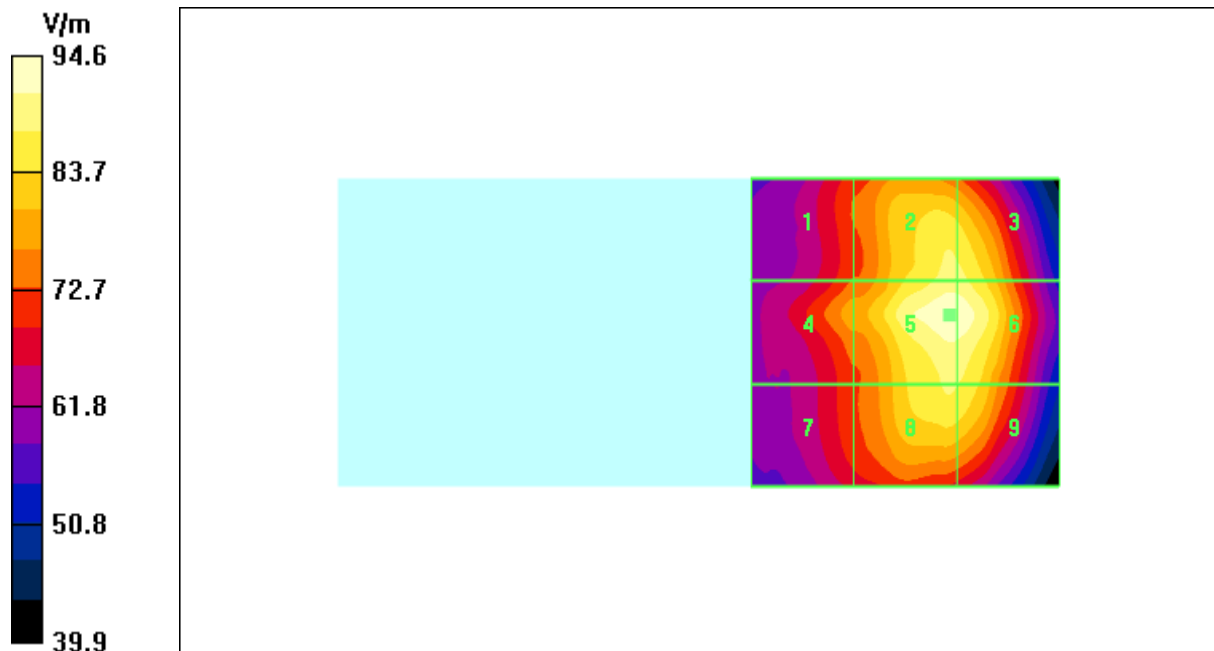

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Down, Date: June/19/2007

Procedure Name: Ch.25, Ant, Intenna, Bat. Standard

Communication System: PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.25, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid: dx=2mm, dy=2mm

Maximum value of peak Total field = 38.3 V/m


Probe Modulation Factor = 1.03

Reference Value = 29.0 V/m; Power Drift = -0.115 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
24.2	29.7	30.6
Grid 4	Grid 5	Grid 6
24.0	37.6	37.8
Grid 7	Grid 8	Grid 9
27.3	38.3	38.3

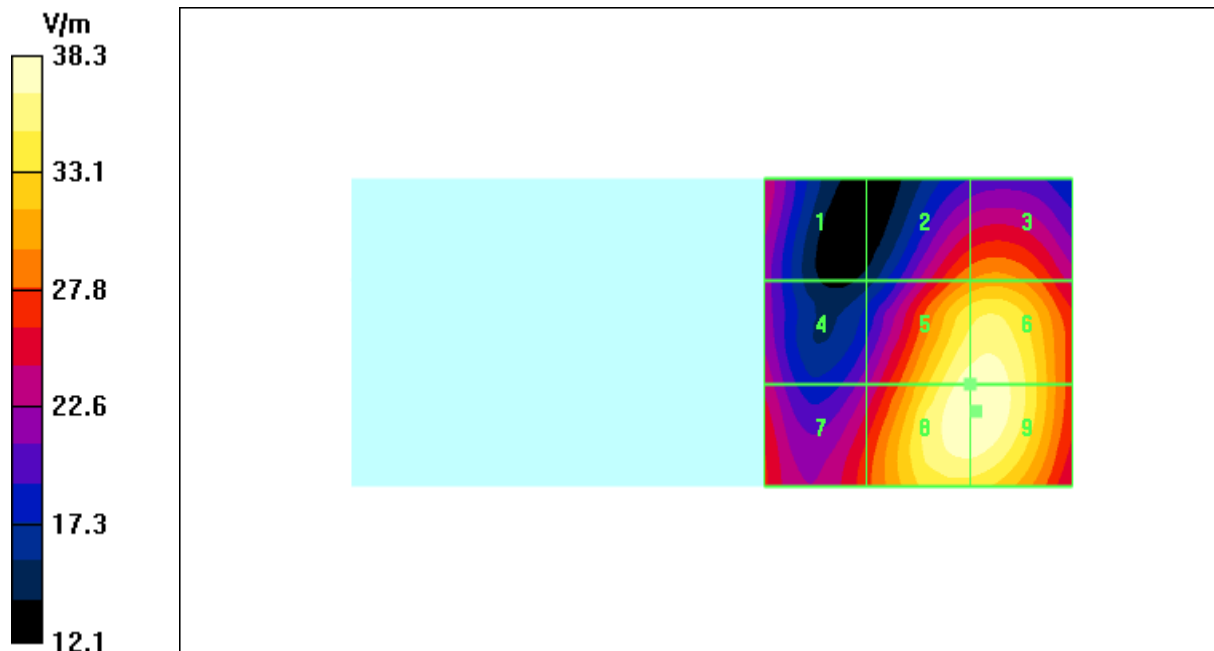

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Down, Date: June/19/2007

Procedure Name: Ch.600, Ant, Intenna, Bat. Standard

Communication System: PCS; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.600, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 28.4 V/m


Probe Modulation Factor = 1.03

Reference Value = 22.0 V/m; Power Drift = 0.084 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
16.7	24.0	24.5
Grid 4	Grid 5	Grid 6
19.0	28.1	28.2
Grid 7	Grid 8	Grid 9
20.4	28.3	28.4

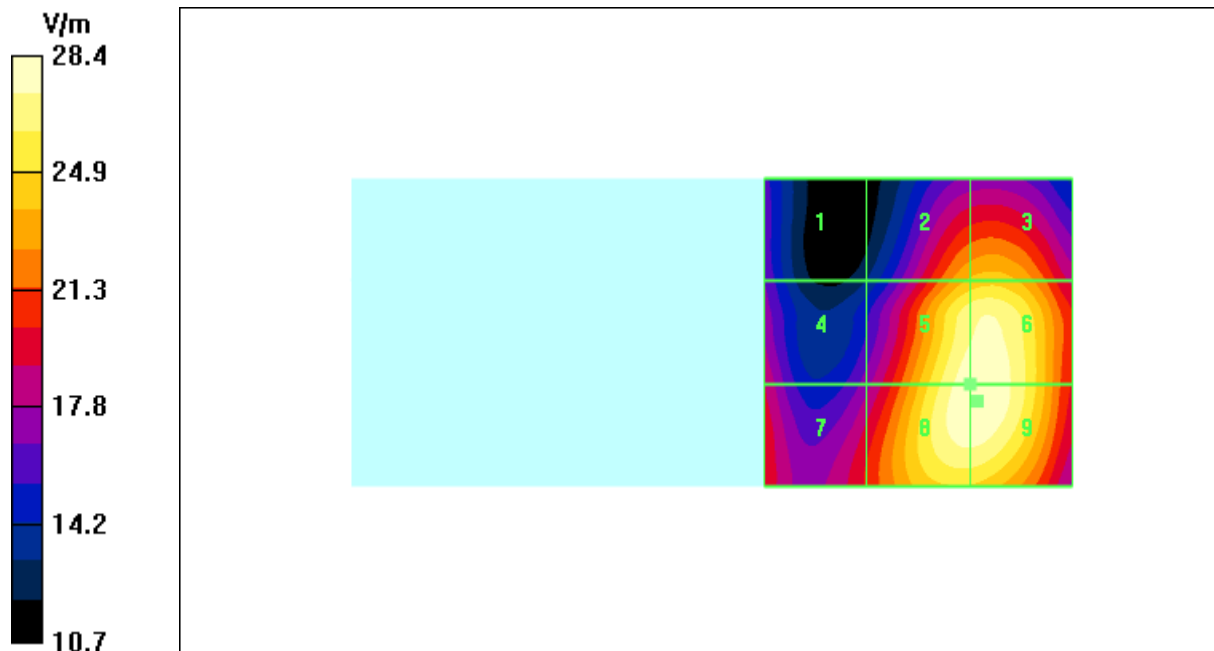

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Down, Date: June/19/2007

Procedure Name: Ch.1175, Ant, Intenna, Bat. Standard

Communication System: PCS; Frequency: 1908.75 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1175, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 31.7 V/m


Probe Modulation Factor = 1.03

Reference Value = 23.6 V/m; Power Drift = 0.035 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
16.1	26.6	27.5
Grid 4	Grid 5	Grid 6
20.2	31.3	31.7
Grid 7	Grid 8	Grid 9
23.3	31.5	31.7

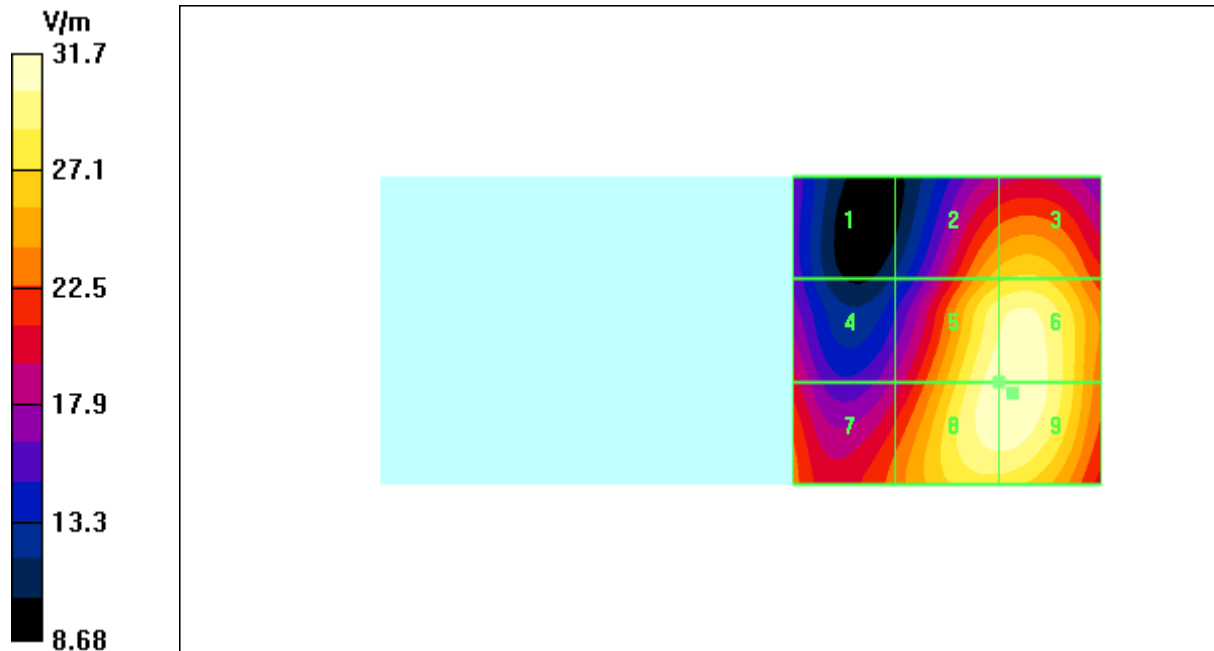

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) H-field,Slide Down, Date: June/20/2007
Procedure Name: Ch.1013, Ant. Intenna, Bat.Standard

Communication System: CDMA(HAC); Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:
- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1013, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.151 A/m


Probe Modulation Factor = 1.03

Reference Value = 0.086 A/m; Power Drift = 0.113 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.151	0.108	0.065
Grid 4	Grid 5	Grid 6
0.144	0.104	0.063
Grid 7	Grid 8	Grid 9
0.141	0.099	0.058

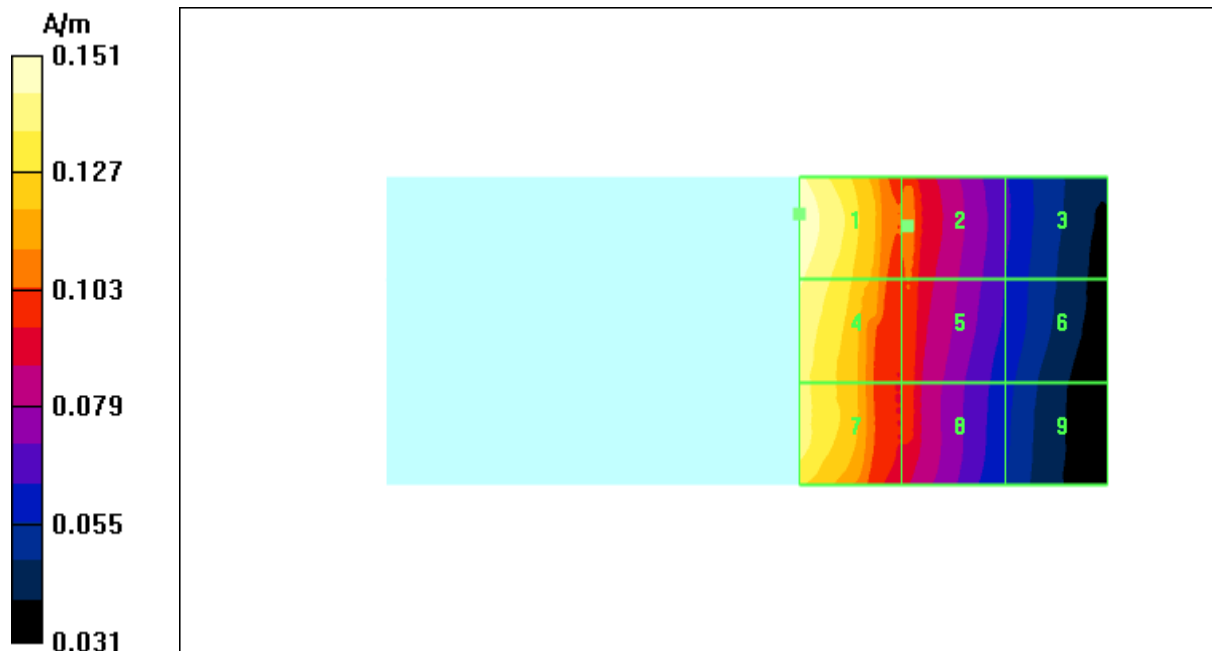

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) H-field,Slide Down, Date: June/20/2007
Procedure Name: Ch.384, Ant. Intenna, Bat.Standard

Communication System: CDMA(HAC); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.384, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.136 A/m


Probe Modulation Factor = 1.03

Reference Value = 0.077 A/m; Power Drift = -0.040 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.136	0.101	0.062
Grid 4	Grid 5	Grid 6
0.132	0.098	0.060
Grid 7	Grid 8	Grid 9
0.129	0.093	0.055

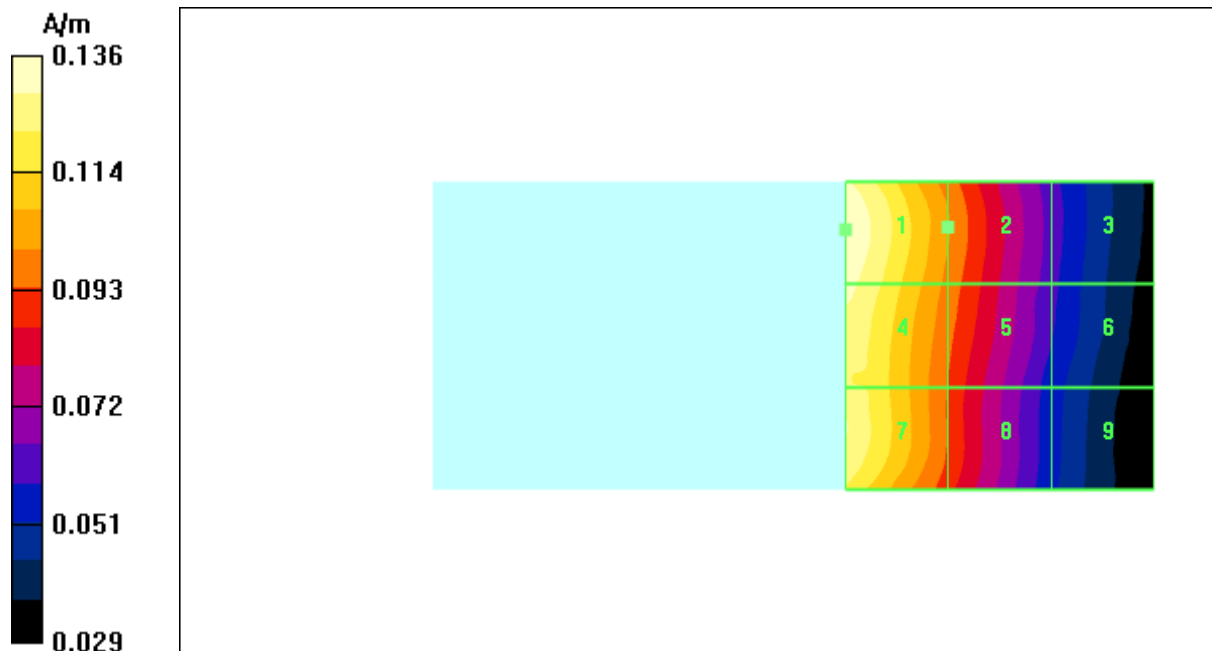

DUT: SCH-R400(Down); Serial: AE-017-K
Program Name: SCH-R400(CDMA) H-field,Slide Down, Date: June/20/2007
Procedure Name: Ch.777, Ant. Intenna, Bat.Standard


Communication System: CDMA(HAC); Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:
- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn686; Calibrated: 2006-11-20
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.777, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:
dx=2mm, dy=2mm
Maximum value of peak Total field = 0.155 A/m
Probe Modulation Factor = 1.03
Reference Value = 0.091 A/m; Power Drift = 0.010 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.155	0.116	0.072
Grid 4	Grid 5	Grid 6
0.149	0.113	0.071
Grid 7	Grid 8	Grid 9
0.147	0.109	0.067

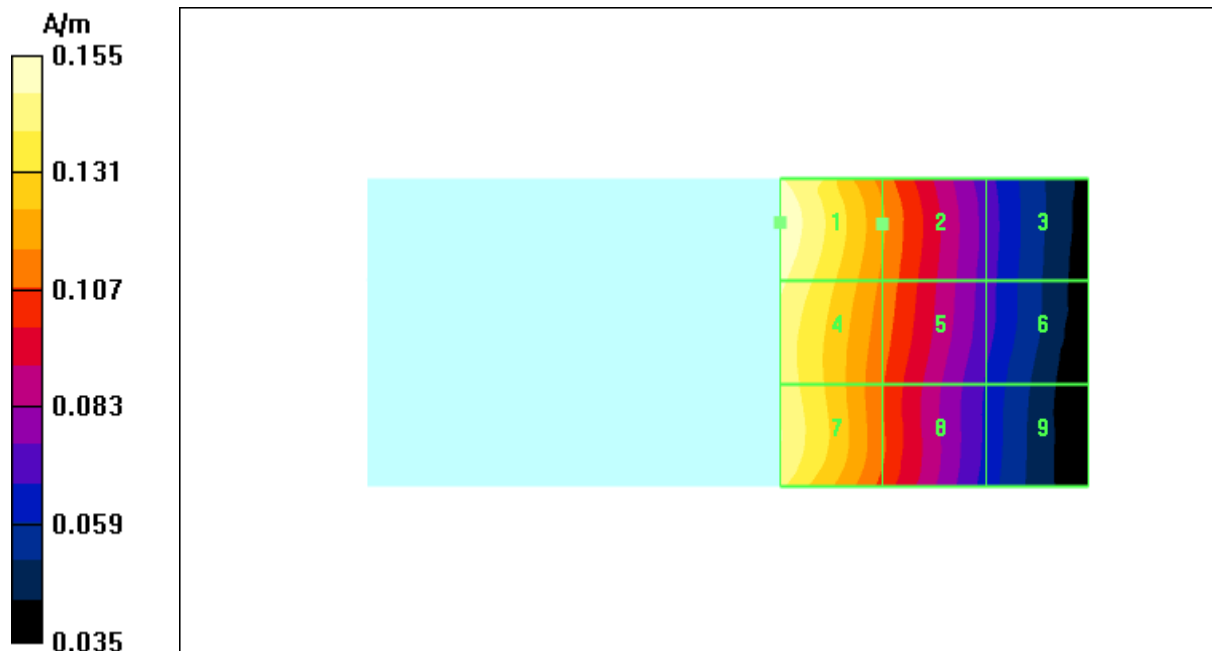

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Down Date: June/20/2007

Procedure Name: Ch.25, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.25, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid: dx=2mm, dy=2mm

Maximum value of peak Total field = 0.114 A/m


Probe Modulation Factor = 1.02

Reference Value = 0.096 A/m; Power Drift = 0.008 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.093	0.093	0.084
Grid 4	Grid 5	Grid 6
0.107	0.104	0.088
Grid 7	Grid 8	Grid 9
0.114	0.108	0.087

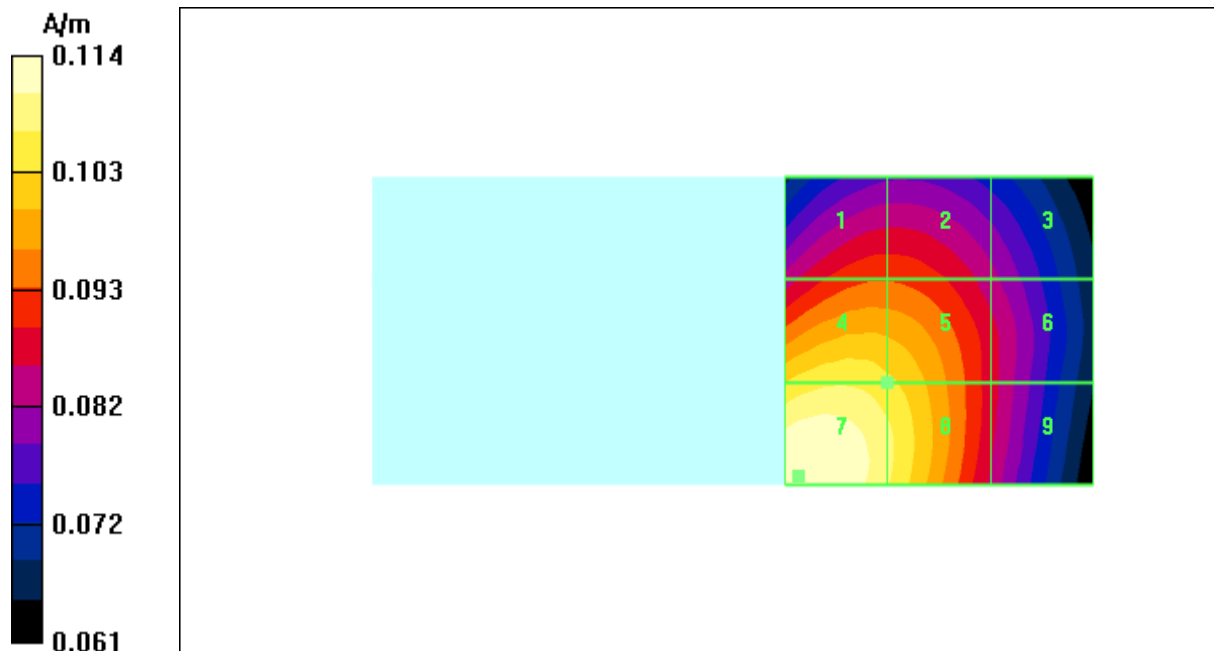

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Down Date: June/20/2007

Procedure Name: Ch.0600, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.0600, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.078 A/m


Probe Modulation Factor = 1.02

Reference Value = 0.064 A/m; Power Drift = -0.059 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.069	0.068	0.058
Grid 4	Grid 5	Grid 6
0.073	0.071	0.057
Grid 7	Grid 8	Grid 9
0.078	0.073	0.054

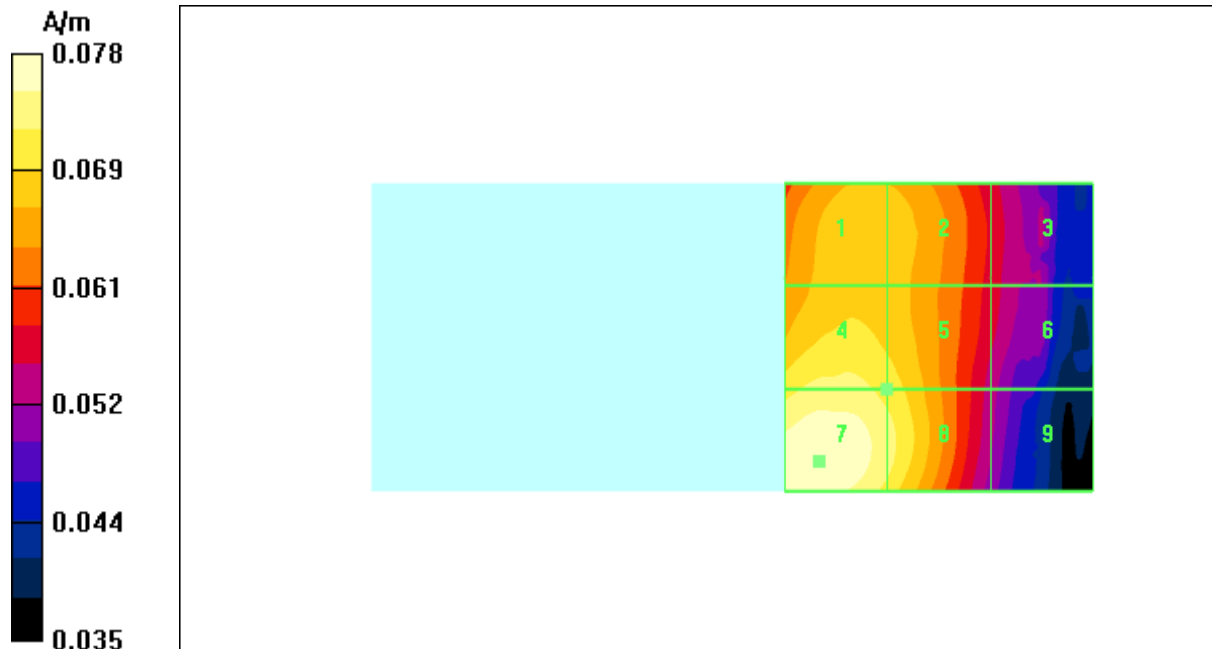

DUT: SCH-R400(Down); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Down Date: June/20/2007

Procedure Name: Ch.1175, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1908.75 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1175, Ant. Intenna, Bat.Standard /Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.083 A/m


Probe Modulation Factor = 1.02

Reference Value = 0.073 A/m; Power Drift = -0.110 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.069	0.070	0.064
Grid 4	Grid 5	Grid 6
0.078	0.076	0.068
Grid 7	Grid 8	Grid 9
0.083	0.078	0.068

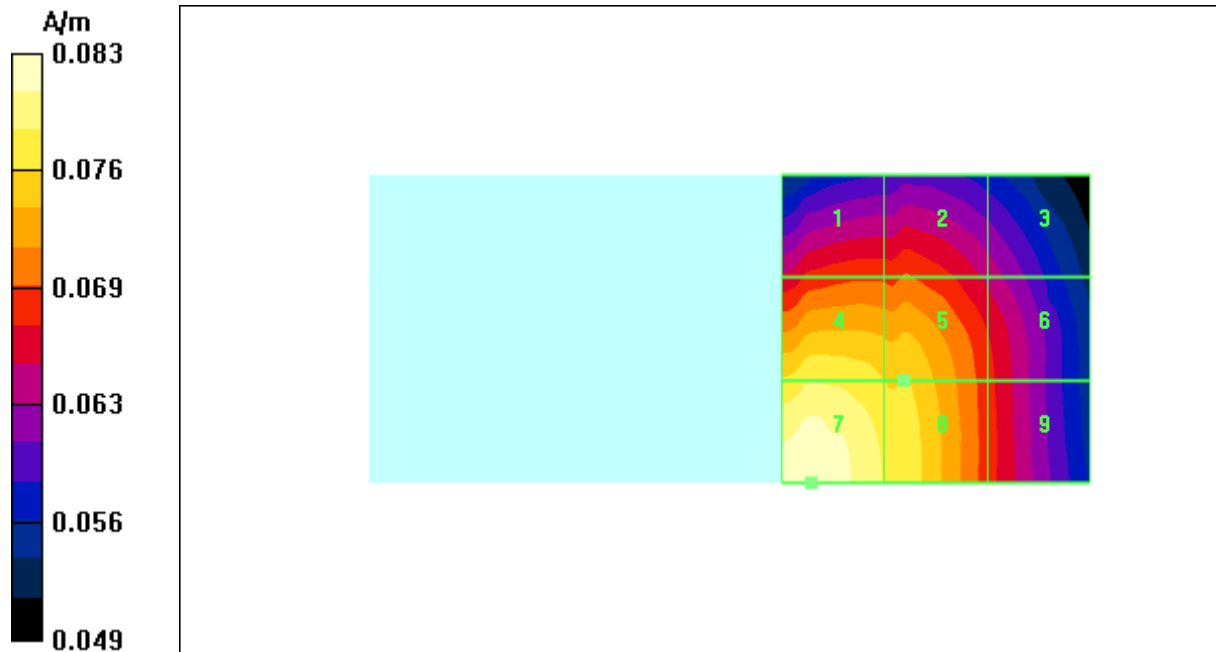

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.1013, Ant, Intenna, Bat. Standard

Communication System: CDMA(HAC); Frequency: 824.7 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1013, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 100.1 V/m

Probe Modulation Factor = 1.01

Reference Value = 98.6 V/m; Power Drift = -0.153 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
75.0	94.6	94.5
Grid 4	Grid 5	Grid 6
80.9	100.1	100.0
Grid 7	Grid 8	Grid 9
76.3	95.2	95.1



DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.0384, Ant, Intenna, Bat. Standard

Communication System: CDMA(HAC); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.0384, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 82.4 V/m

Probe Modulation Factor = 1.01

Reference Value = 80.9 V/m; Power Drift = -0.097 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
66.1	78.4	78.0
Grid 4	Grid 5	Grid 6
71.3	82.4	82.2
Grid 7	Grid 8	Grid 9
66.3	77.9	77.8



DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.777, Ant, Intenna, Bat. Standard

Communication System: CDMA(HAC); Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.777, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 110.9 V/m


Probe Modulation Factor = 1.01

Reference Value = 109.9 V/m; Power Drift = 0.040 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
86.5	105.4	105.3
Grid 4	Grid 5	Grid 6
93.0	110.9	110.9
Grid 7	Grid 8	Grid 9
85.6	103.5	103.4

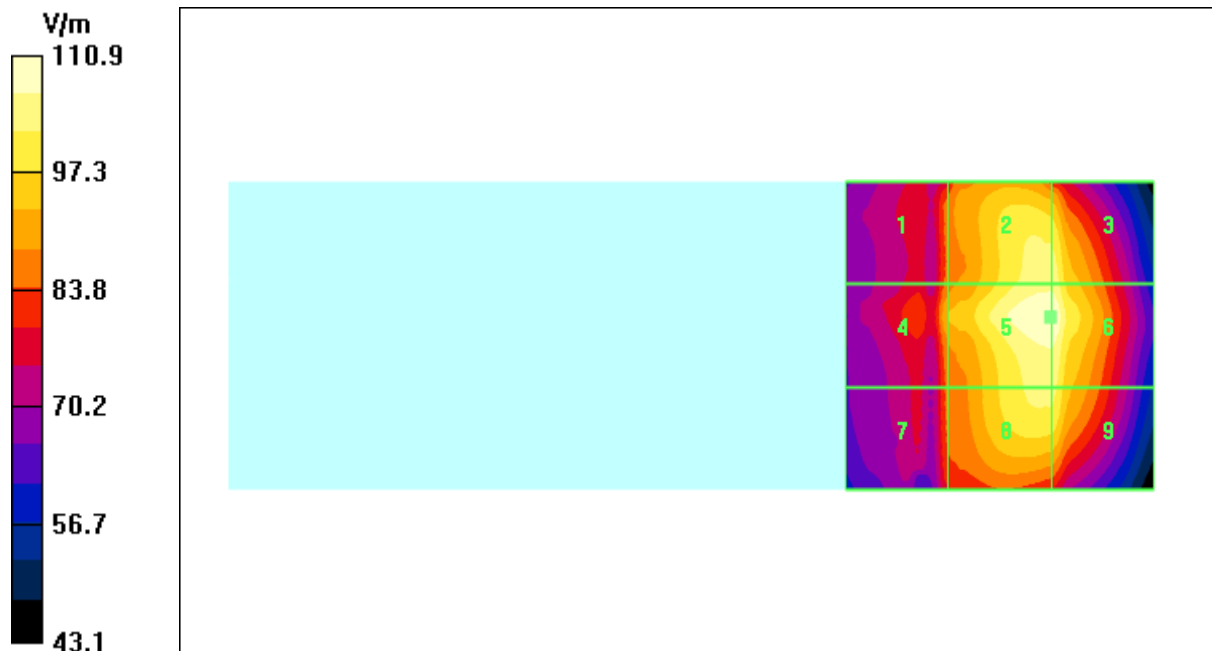

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.25, Ant, Intenna, Bat.Standard

Communication System: PCS; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.25, Ant, Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid: dx=2mm, dy=2mm

Maximum value of peak Total field = 40.4 V/m


Probe Modulation Factor = 1.03

Reference Value = 29.2 V/m; Power Drift = -0.040 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
19.4	34.8	35.8
Grid 4	Grid 5	Grid 6
19.1	39.6	40.4
Grid 7	Grid 8	Grid 9
23.8	39.8	40.4

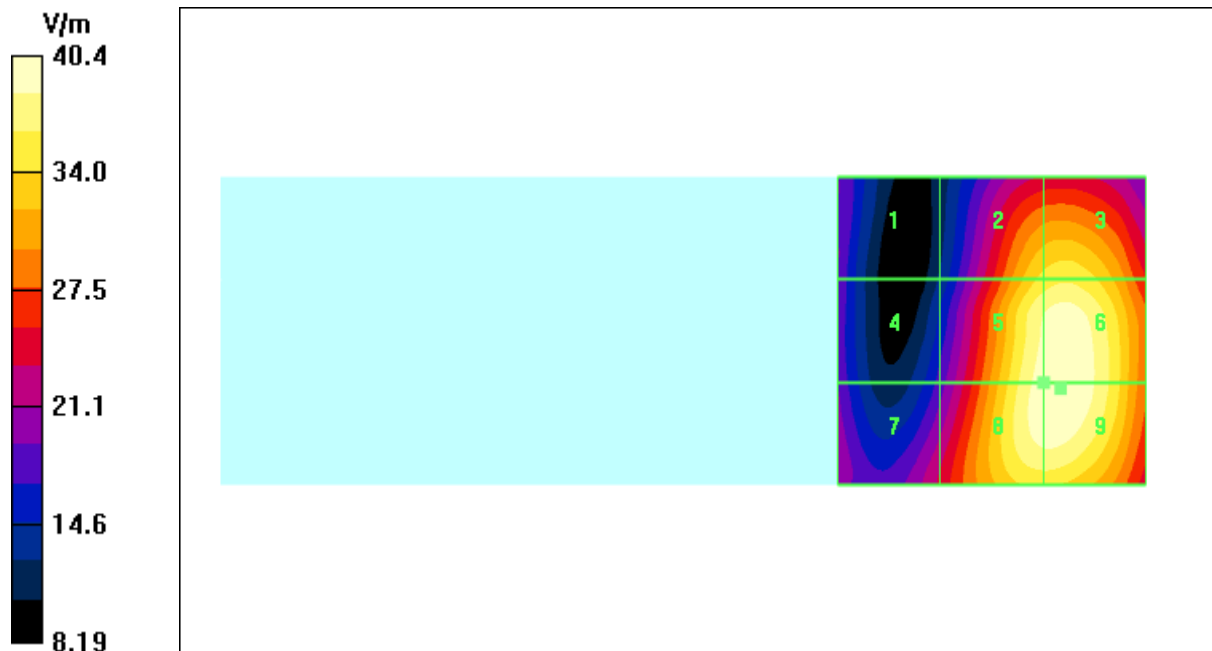

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.600, Ant, Intenna, Bat.Standard

Communication System: PCS; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.600, Ant, Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 30.7 V/m


Probe Modulation Factor = 1.03

Reference Value = 23.6 V/m; Power Drift = 0.054 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
13.3	26.8	27.2
Grid 4	Grid 5	Grid 6
15.2	30.3	30.7
Grid 7	Grid 8	Grid 9
18.1	30.4	30.7

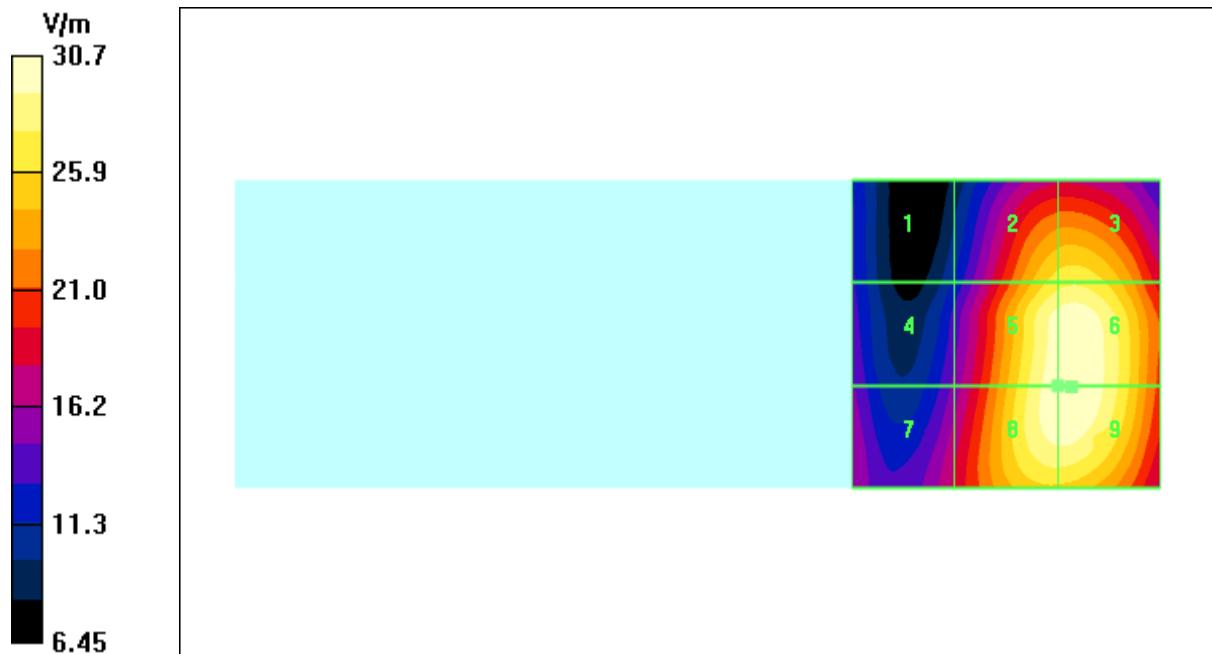

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.1175, Ant, Intenna, Bat.Standard

Communication System: PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1175, Ant, Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 30.5 V/m


Probe Modulation Factor = 1.03

Reference Value = 22.1 V/m; Power Drift = 0.115 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
15.5	27.1	28.0
Grid 4	Grid 5	Grid 6
17.3	29.7	30.5
Grid 7	Grid 8	Grid 9
18.4	29.7	30.3

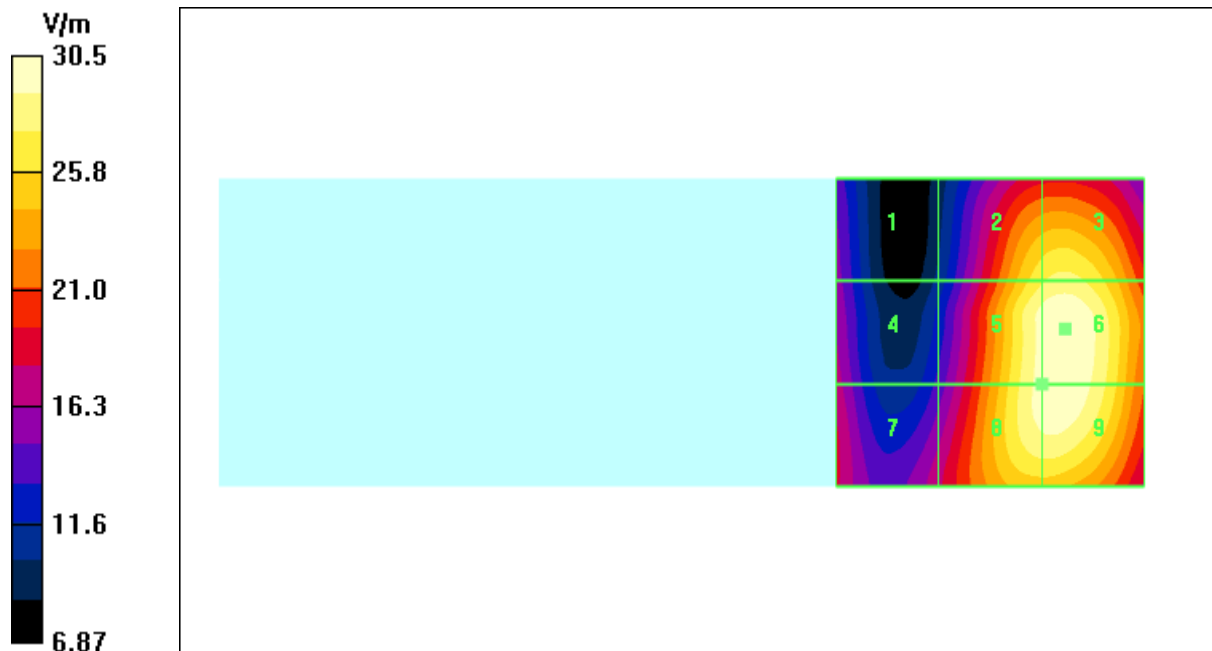

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) E-Field, Slide Up, Date: June/19/2007

Procedure Name: Ch.25, Ant, Intenna, Bat.Standard Back light ON

Communication System: PCS; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2370; ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.25, Ant, Intenna, Bat.Standard Back light ON/Hearing Aid Compatibility Test (251x251x1):

Measurement grid: dx=2mm, dy=2mm

Maximum value of peak Total field = 39.6 V/m


Probe Modulation Factor = 1.03

Reference Value = 31.8 V/m; Power Drift = 0.019 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
21.5	34.9	36.0
Grid 4	Grid 5	Grid 6
18.6	39.0	39.6
Grid 7	Grid 8	Grid 9
24.0	39.0	39.5

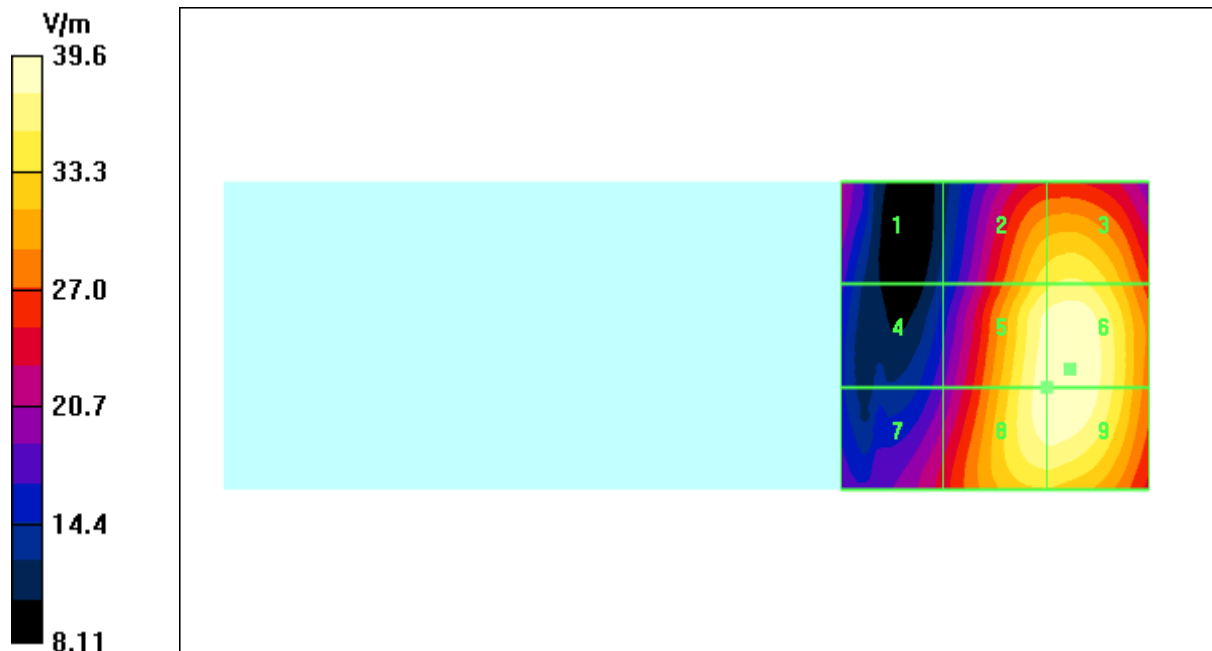

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) H-field,Slide Up Date: June/20/2007

Procedure Name: Ch.1013, Ant. Intenna, Bat.Standard

Communication System: CDMA(HAC); Frequency: 824.7 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1013, Ant. Intenna, Bat.Standard /Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.118 A/m


Probe Modulation Factor = 1.03

Reference Value = 0.067 A/m; Power Drift = 0.049 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.118	0.092	0.059
Grid 4	Grid 5	Grid 6
0.114	0.088	0.057
Grid 7	Grid 8	Grid 9
0.115	0.088	0.053

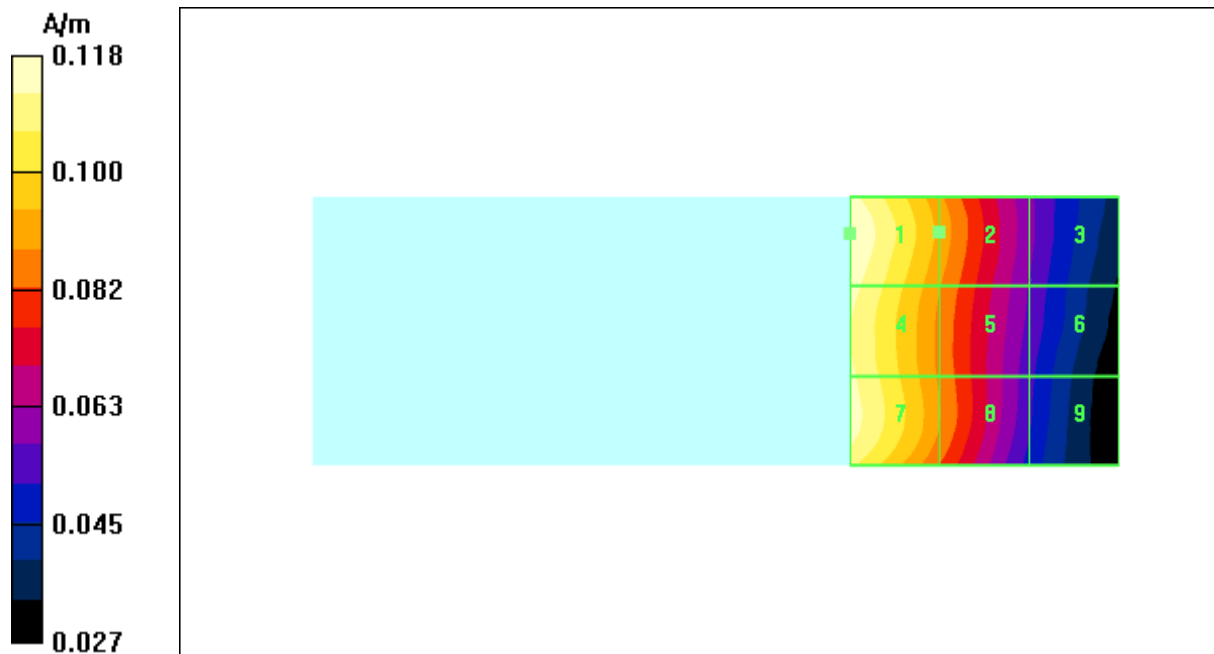

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) H-field,Slide Up Date: June/20/2007

Procedure Name: Ch.384, Ant. Intenna, Bat.Standard

Communication System: CDMA(HAC); Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.384, Ant. Intenna, Bat.Standard /Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.096 A/m


Probe Modulation Factor = 1.03

Reference Value = 0.054 A/m; Power Drift = 0.109 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.095	0.072	0.044
Grid 4	Grid 5	Grid 6
0.094	0.071	0.043
Grid 7	Grid 8	Grid 9
0.096	0.072	0.042

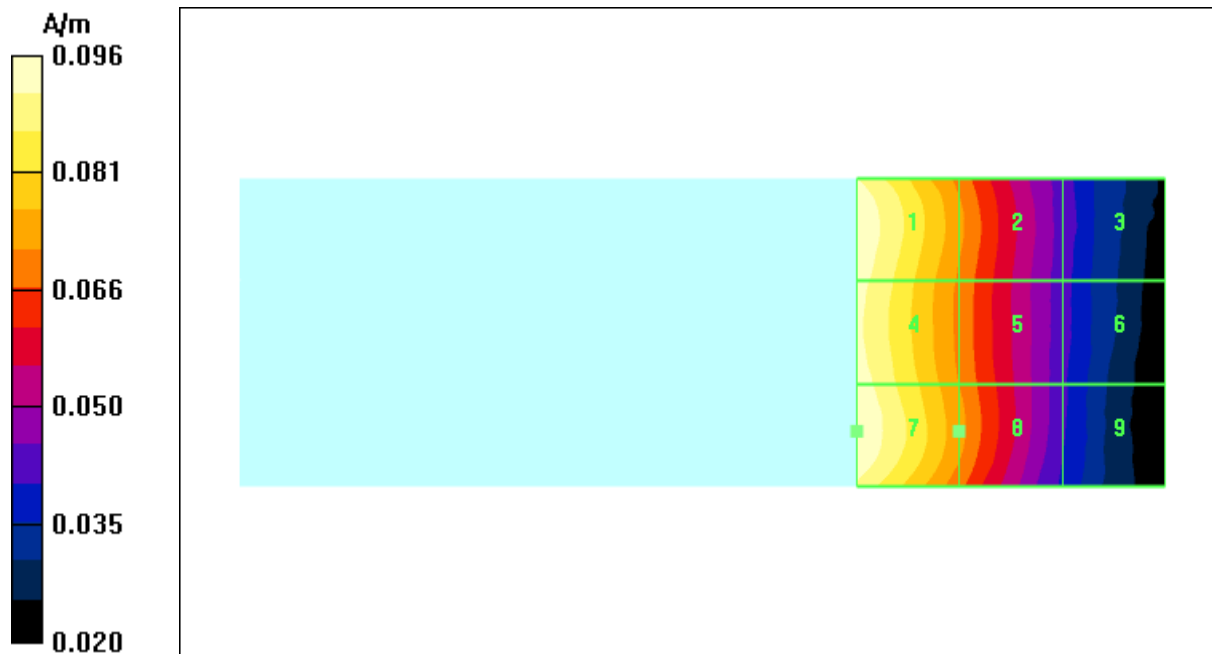

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(CDMA) H-field,Slide Up Date: June/20/2007

Procedure Name: Ch.777, Ant. Intenna, Bat.Standard

Communication System: CDMA(HAC); Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.777, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.188 A/m


Probe Modulation Factor = 1.03

Reference Value = 0.106 A/m; Power Drift = 0.118 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.188	0.129	0.077
Grid 4	Grid 5	Grid 6
0.186	0.128	0.077
Grid 7	Grid 8	Grid 9
0.188	0.127	0.074

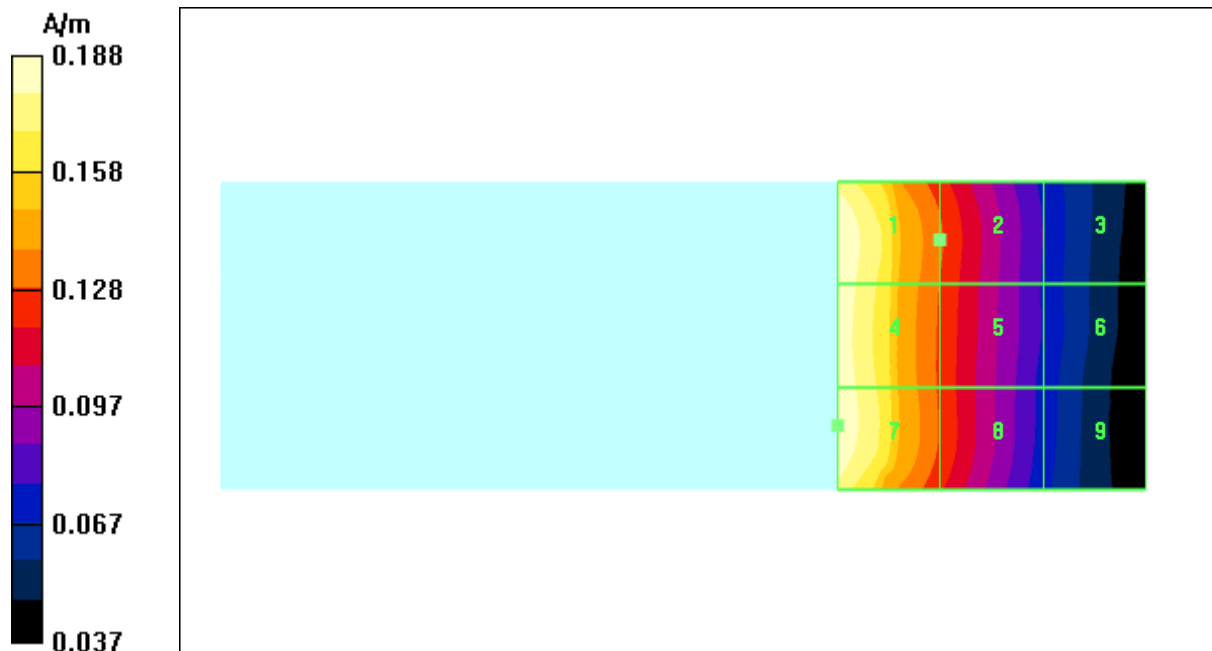

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Up Date: June/20/2007

Procedure Name: Ch.25, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.25, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.101 A/m

Probe Modulation Factor = 1.02

Reference Value = 0.084 A/m; Power Drift = 0.168 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.088	0.087	0.071
Grid 4	Grid 5	Grid 6
0.095	0.092	0.072
Grid 7	Grid 8	Grid 9
0.101	0.095	0.070



DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Up Date: June/20/2007

Procedure Name: Ch.0600, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.0600, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.073 A/m


Probe Modulation Factor = 1.02

Reference Value = 0.059 A/m; Power Drift = 0.007 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.065	0.064	0.051
Grid 4	Grid 5	Grid 6
0.070	0.068	0.052
Grid 7	Grid 8	Grid 9
0.073	0.070	0.051

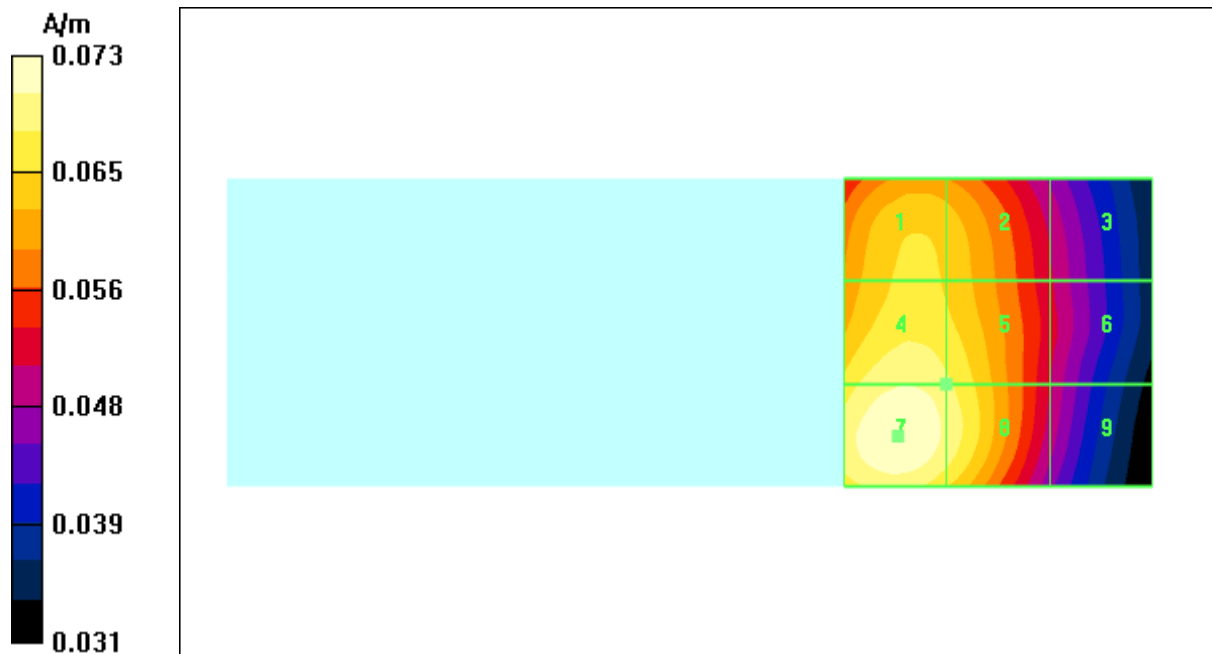

DUT: SCH-R400(Up); Serial: AE-017-K

Program Name: SCH-R400(PCS) H-Field, Slide Up Date: June/20/2007

Procedure Name: Ch.1175, Ant. Intenna, Bat.Standard

Communication System: PCS; Frequency: 1908.75 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6197; ; Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn686; Calibrated: 2006-11-20

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1018

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch.1175, Ant. Intenna, Bat.Standard/Hearing Aid Compatibility Test (251x251x1): Measurement grid:

dx=2mm, dy=2mm

Maximum value of peak Total field = 0.079 A/m


Probe Modulation Factor = 1.02

Reference Value = 0.066 A/m; Power Drift = 0.154 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.070	0.068	0.055
Grid 4	Grid 5	Grid 6
0.076	0.072	0.055
Grid 7	Grid 8	Grid 9
0.079	0.074	0.054

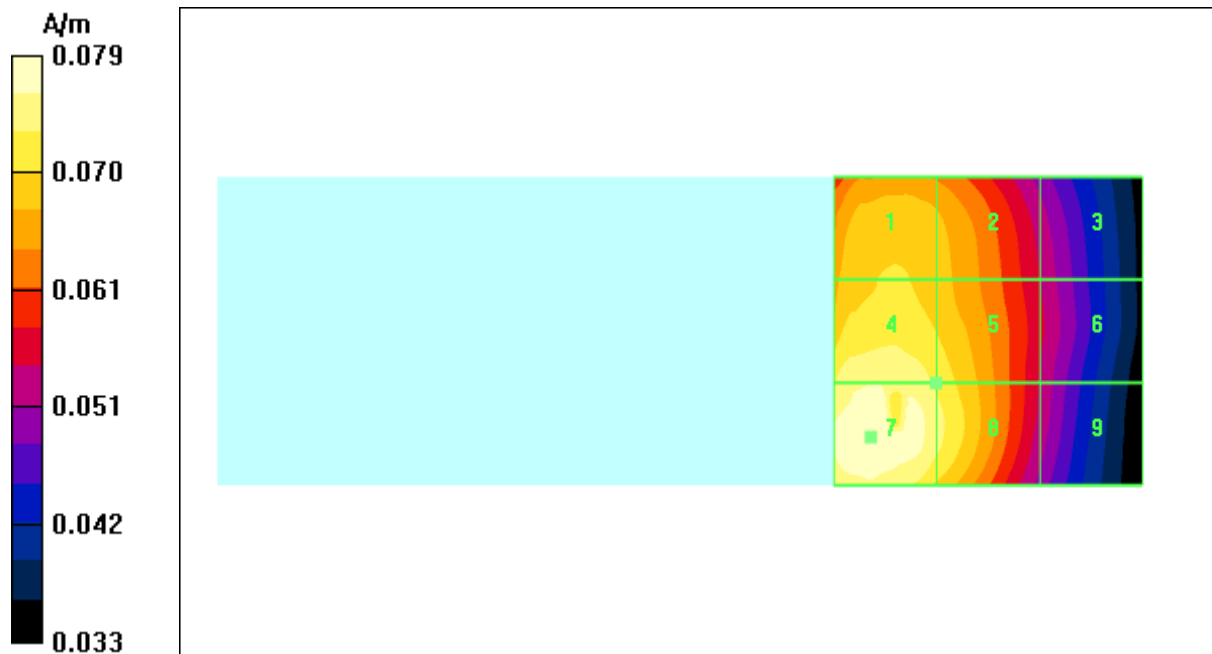



APPENDIX E

Probe Calibration(E-field)



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Samsung C (Dymstec)**

Certificate No: **ER3-2370_Apr07**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2370**

Calibration procedure(s) **QA CAL-02.v5**
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **April 20, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41496087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ER3DV6	SN: 2328	2-Oct-06 (SPEAG, No. ER3-2328_Oct06)	Oct-07
DAE4	SN: 907	20-Jul-06 (SPEAG, No. DAE4-907_Jul06)	Jul-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: April 21, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

OK to use.

2007.5.16



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart).
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ER3DV6

SN:2370

Manufactured:	October 12, 2005
Last calibrated:	May 16, 2006
Recalibrated:	April 20, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ER3DV6 SN:2370

Sensitivity in Free Space [$\mu\text{V}/(\text{V}/\text{m})^2$] Diode Compression^A

NormX	1.74 $\pm$ 10.1 % (k=2)	DCP X	95 mV
NormY	1.62 $\pm$ 10.1 % (k=2)	DCP Y	95 mV
NormZ	1.96 $\pm$ 10.1 % (k=2)	DCP Z	98 mV

Frequency Correction

X	0.0
Y	0.0
Z	0.0

Sensor Offset (Probe Tip to Sensor Center)

X	2.5 mm
Y	2.5 mm
Z	2.5 mm


Connector Angle **-45** °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



^A numerical linearization parameter: uncertainty not required

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide R22)

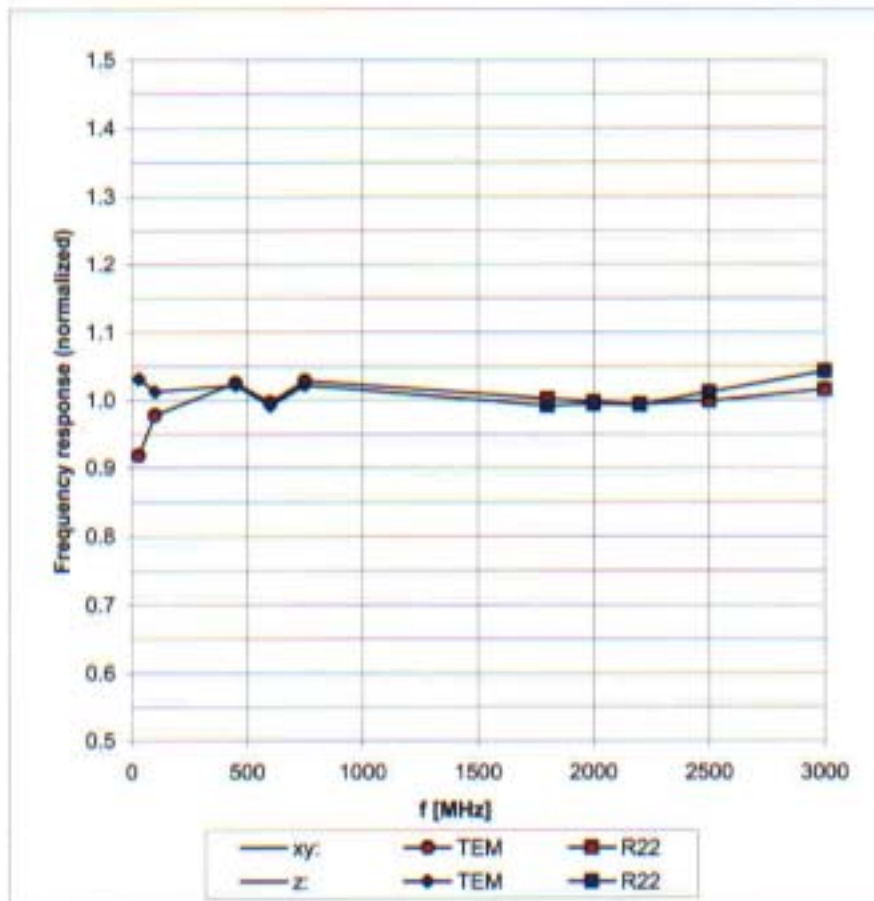

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

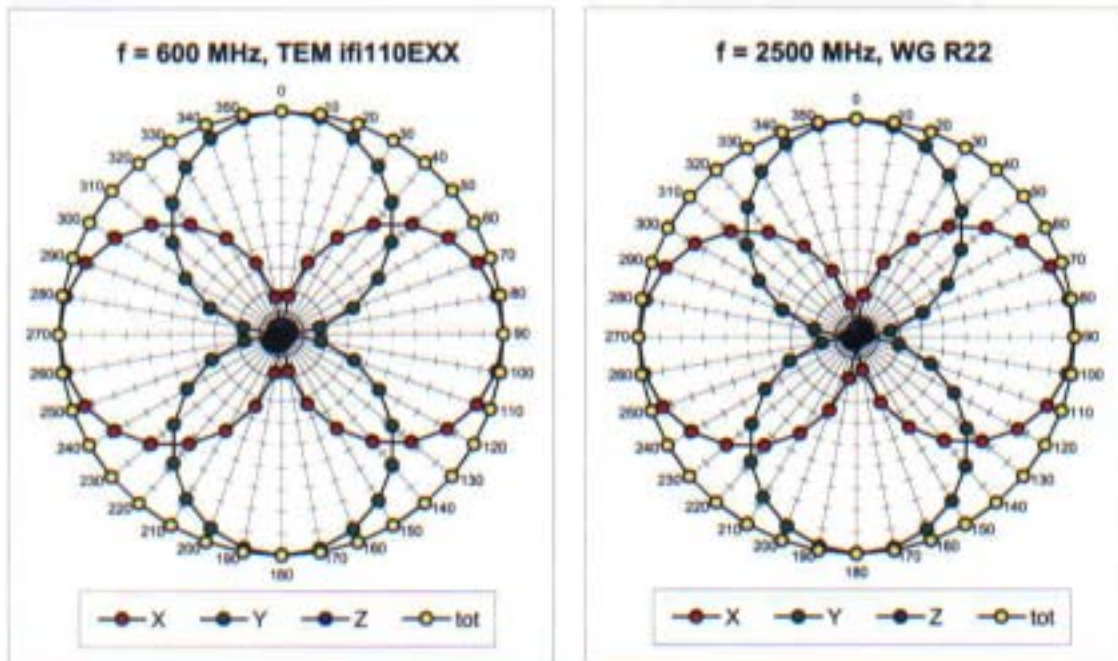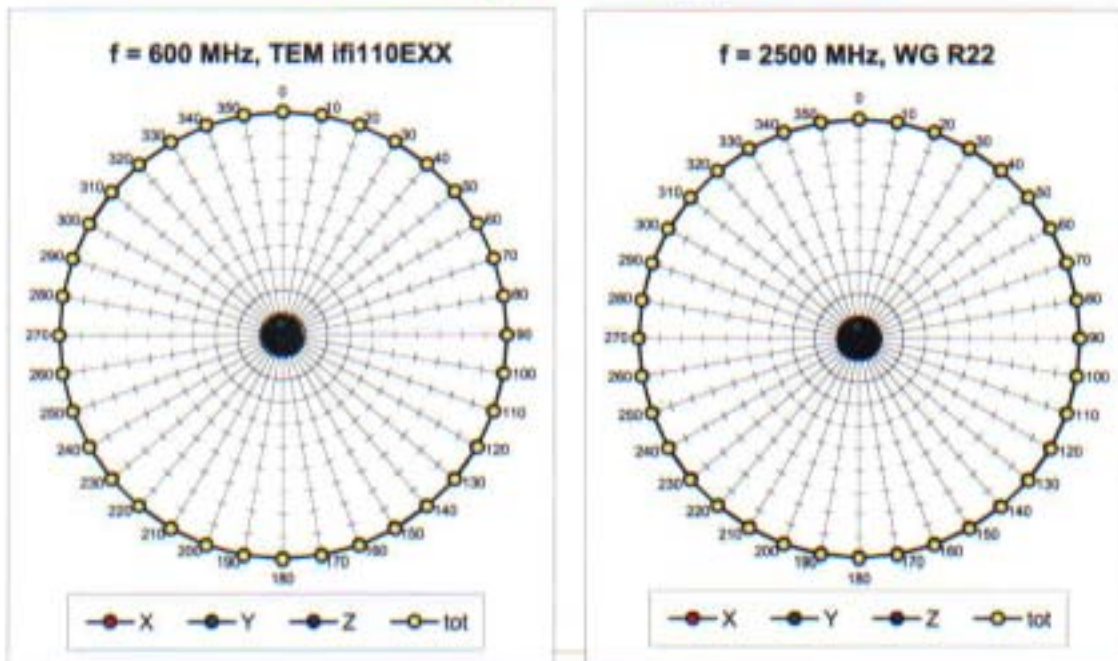
Receiving Pattern (ϕ), $\vartheta = 0^\circ$ **Receiving Pattern (ϕ), $\vartheta = 90^\circ$** 

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

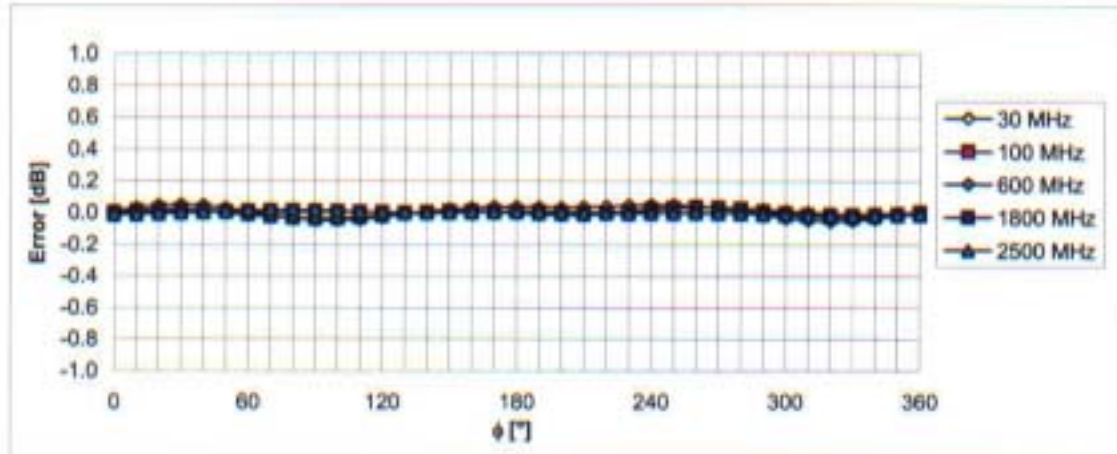

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Receiving Pattern (ϕ), $\vartheta = 90^\circ$

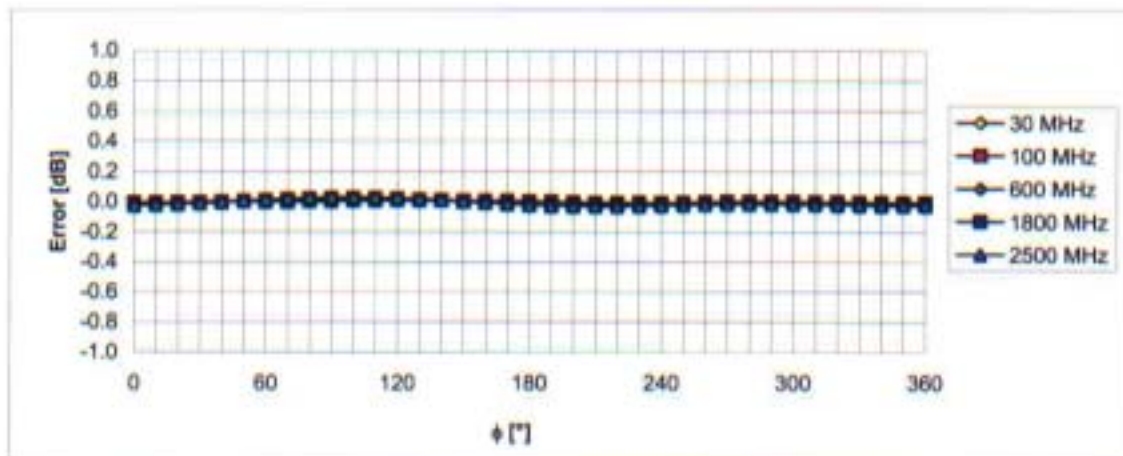

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(E-field)


(Waveguide R22, $f = 1800$ MHz)

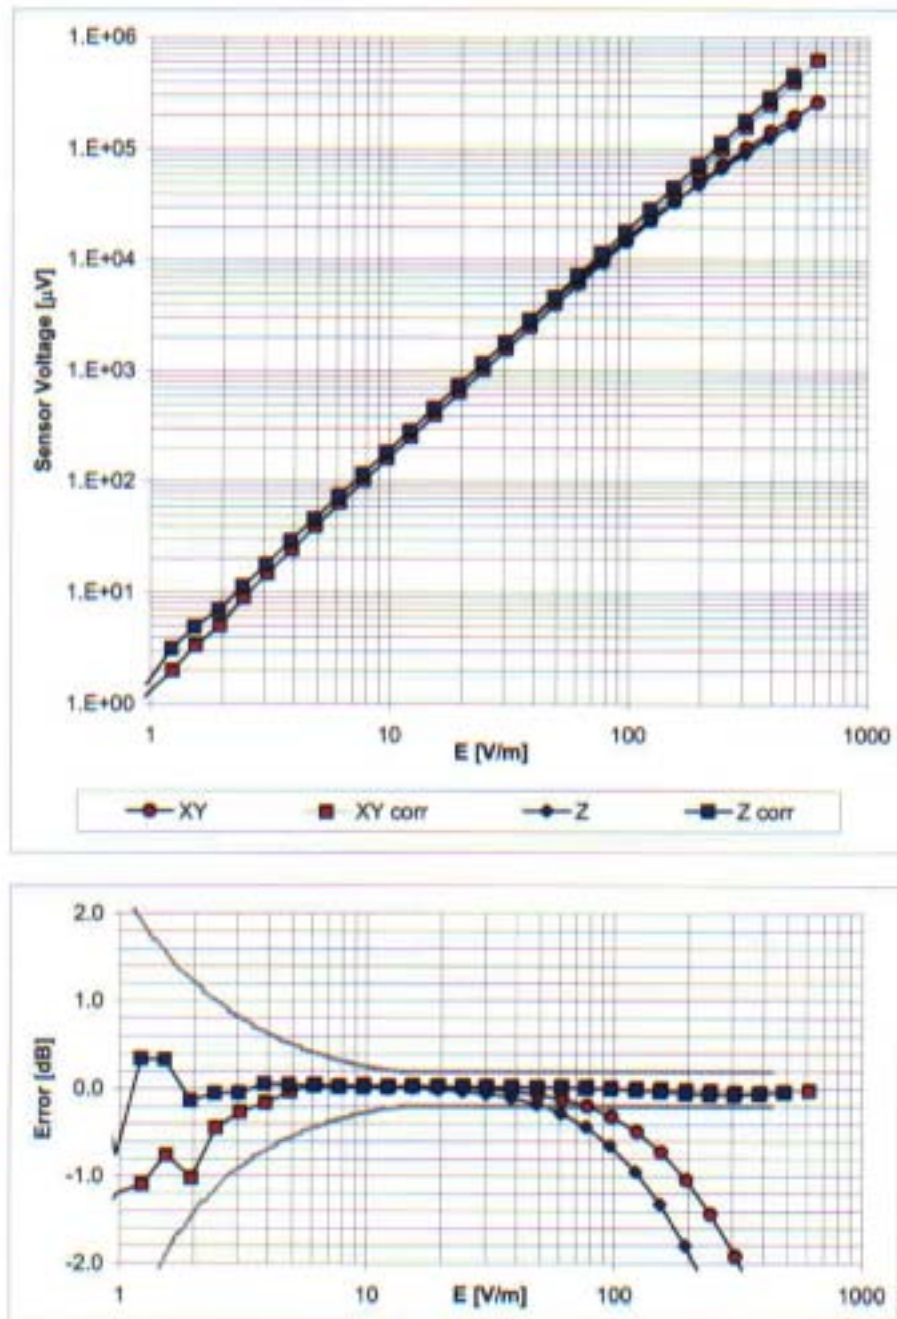

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Deviation from Isotropy in Air

Error (ϕ , θ), $f = 900$ MHz

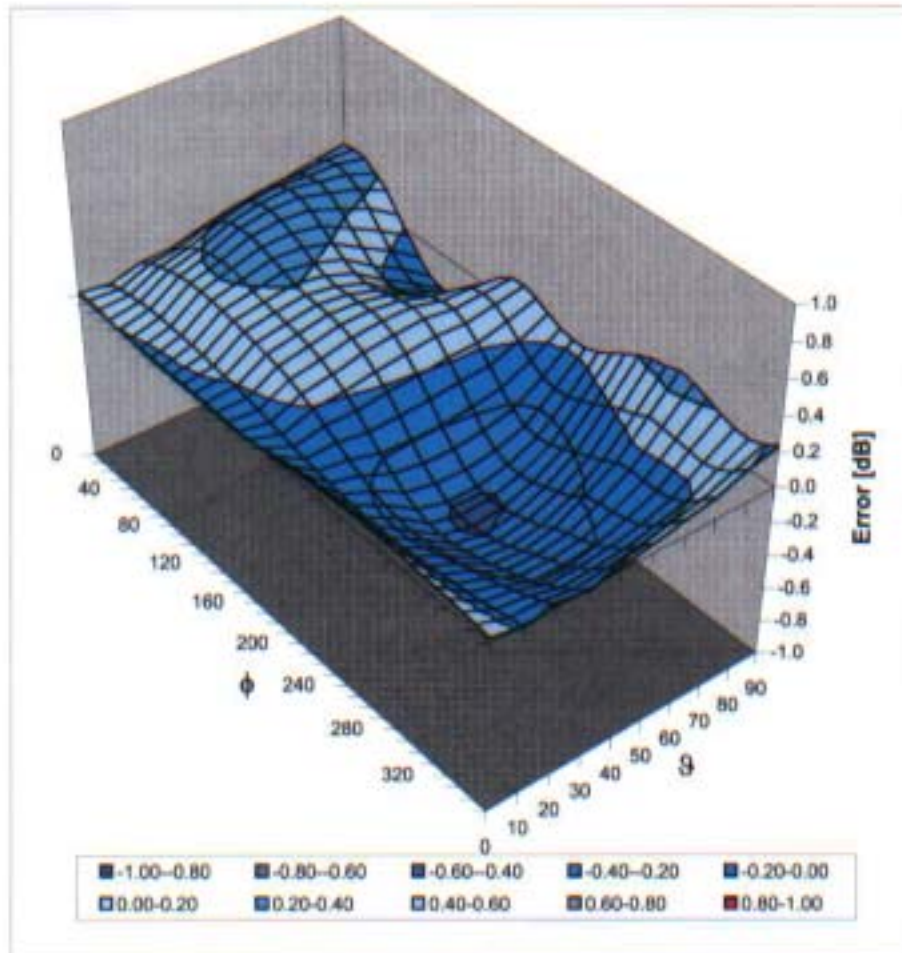

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)