



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : SGH-A697
FCC ID(Requested) : A3LSGHA697
Report No : FG-352-R1
Job No : FG-352
Date issued : January 19, 2010

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

HJ AN – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Effective Radiated Power (E.R.P.)	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.).....	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph.....	21
6.7.3. GSM1900 Frequency Stability Table	24
6.7.4. GSM1900 Frequency Stability Graph.....	25
7. CONCLUSION.....	28
8. TEST PLOTS.....	29



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LSGHA697
Model : SGH-A697
- Quantity : Quantity production is planned
- Emission Designators : 248KGXW(GSM850), 239KG7W(GSM850 EDGE)
251KGXW(GSM1900), 242KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.637 W ERP GSM850 (28.04 dBm)
1.390 W EIRP GSM1900 (31.43 dBm)
0.270 W ERP GSM850 EDGE(24.31 dBm)
0.618 W EIRP GSM1900 EDGE(27.91 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : January 7-8, 2010
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-352-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	83611 9/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2010-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2010-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	360306/011	2010-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

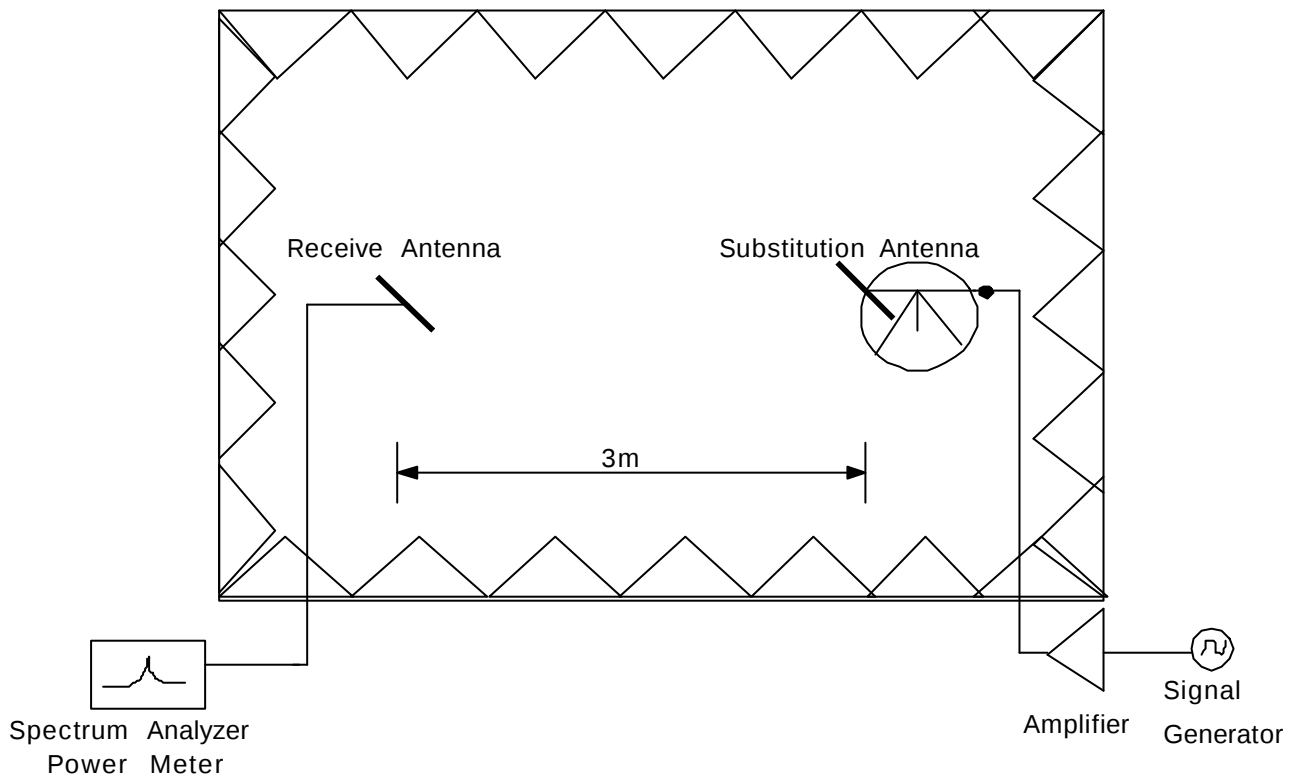


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

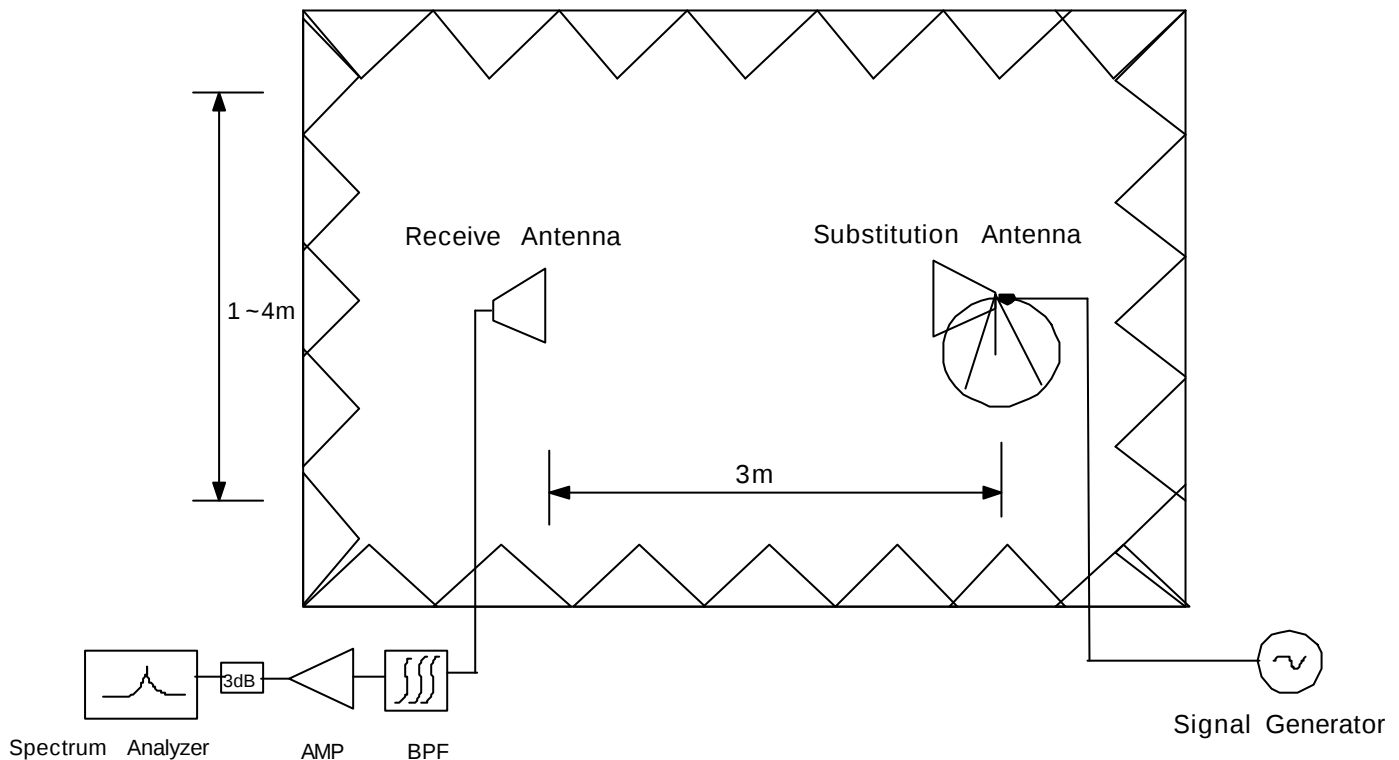


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.646 \text{ W}) = 41.1 \text{ dB}$$

$$28.10 \text{ dBm} - 41.1 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	27.00	H	-9.48	-0.67	-8.81
		V	-9.67	-0.67	-9.00
836.60	27.00	H	-10.90	-0.73	-10.17
		V	-10.42	-0.73	-9.69
848.80	28.00	H	-12.55	-0.79	-11.76
		V	-11.22	-0.79	-10.43

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-8.51	H	289/100	27.30	0.537	Standard
836.60	-10.01	H	287/125	27.16	0.520	Standard
848.80	-11.72	H	92/10	28.04	0.637	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-15.56	H	92/10	24.31	0.270	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.75	9.70	-19.45
		V	-9.38	9.70	-19.08
1880.00	30.00	H	-9.11	9.70	-18.81
		V	-9.11	9.70	-18.81
1909.80	31.00	H	-8.11	9.70	-17.81
		V	-7.80	9.70	-17.50

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.33	H	140/0	29.12	0.817	Standard
1880.00	-18.85	H	213/170	29.96	0.991	Standard
1909.80	-17.07	V	217/90	31.43	1.390	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1909.80	-20.59	V	217/90	27.91	0.618	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 28.10 dBm = 0.646 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 41.1 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-57.82	H	73.82
	3	2472.60	-55.30	H	66.84
	4	3296.80	-65.36	V	73.17
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-56.27	H	71.77
	3	2509.80	-55.97	H	67.52
	4	3346.40	-67.15	V	74.79
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-54.07	H	69.36
	3	2546.40	-50.03	H	61.69
	4	3395.20	-67.81	H	75.86
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 30.83 dBm = 1.211 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 43.83 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-68.17	H	75.06
	3	5550.60	-58.24	H	59.39
	4	7400.80	-60.60	H	57.10
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-67.78	H	74.53
	3	5640.00	-60.94	H	62.04
	4	7520.00	-62.95	H	59.66
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-66.25	V	71.40
	3	5729.40	-61.95	H	62.30
	4	7639.20	-66.98	H	63.52
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : January 8, 2010

Test Engineer : HJ AN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= ERP+2.15 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBd	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Teste d EUT Level : H dBm	Teste d EUT Level : H dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-57.82	-59.65	73.82	75.79
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-55.30	-64.75	66.84	76.54
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-65.77	-65.36	74.05	73.17
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-56.27	-60.28	71.77	74.89
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-55.97	-66.94	67.52	78.54
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-67.19	-67.15	74.97	74.79
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-54.07	-62.46	69.36	77.95
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-50.03	-67.19	61.69	77.49
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-67.81	-68.08	75.88	75.86
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : January 8, 2010

Test Engineer : HJ AN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= EIRP - (-13 +)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-68.17	-68.21	75.06	75.47
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-58.24	-60.51	59.39	61.54
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-60.60	-61.55	57.10	58.42
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-67.78	-68.03	74.53	74.81
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-60.94	-62.58	62.04	63.33
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-62.95	-66.24	59.66	63.12
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-67.63	-66.25	73.44	71.40
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-61.95	-62.50	62.30	62.84
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-66.98	-68.07	63.52	64.46
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	42.20	836,600,042	0.000005	0.050
100%		-30	37.90	836,600,038	0.000005	0.045
100%		-20	-14.10	836,599,986	-0.000002	-0.017
100%		-10	19.80	836,600,020	0.000002	0.024
100%		0	-14.10	836,599,986	-0.000002	-0.017
100%		+10	0.50	836,600,001	0.000000	0.001
100%		+20	42.20	836,600,042	0.000005	0.050
100%		+30	38.50	836,600,039	0.000005	0.046
100%		+40	36.50	836,600,037	0.000004	0.044
100%		+50	-34.60	836,599,965	-0.000004	-0.041
100%		+60	22.50	836,600,023	0.000003	0.027
85%	3.35	+20	35.90	836,600,036	0.000004	0.043
115%	4.26	+20	8.60	836,600,009	0.000001	0.010
Batt.Endpoint	3.35	+20	35.90	836,600,036	0.000004	0.043


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

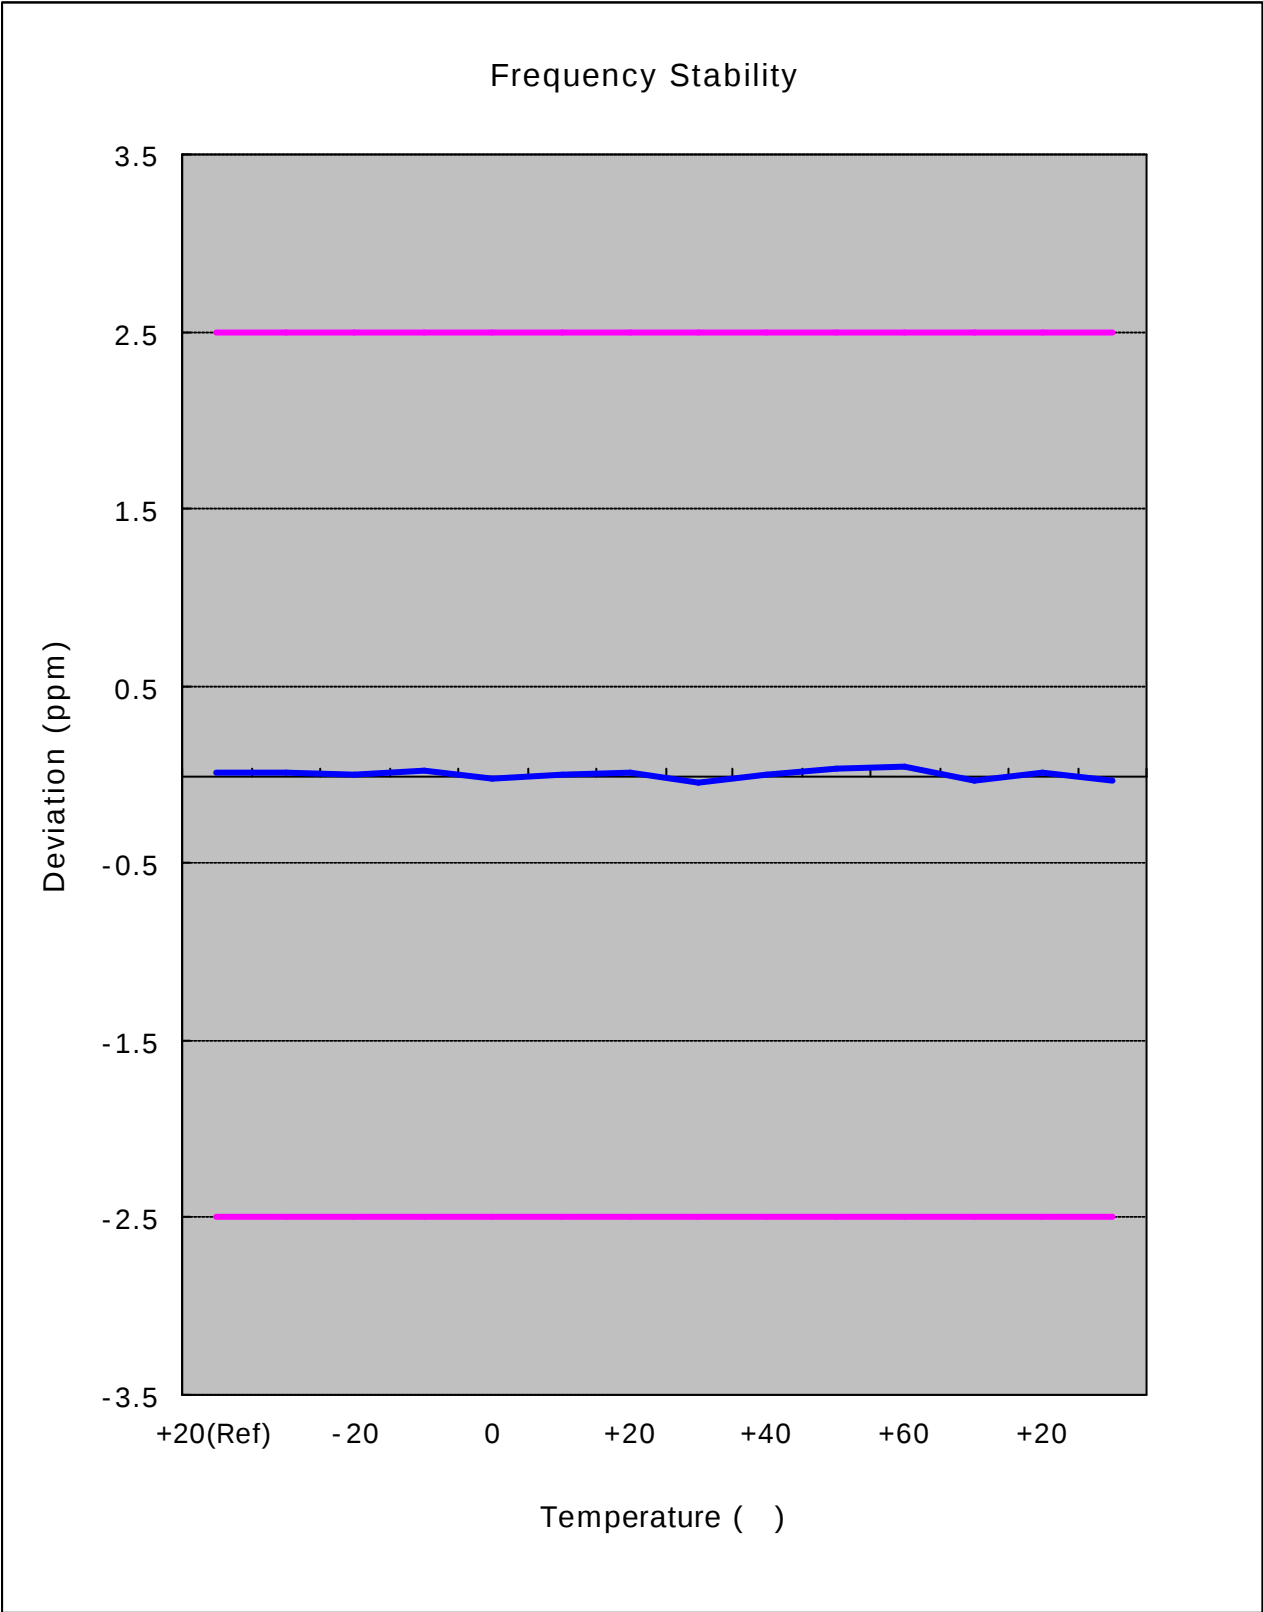

Zoom IN

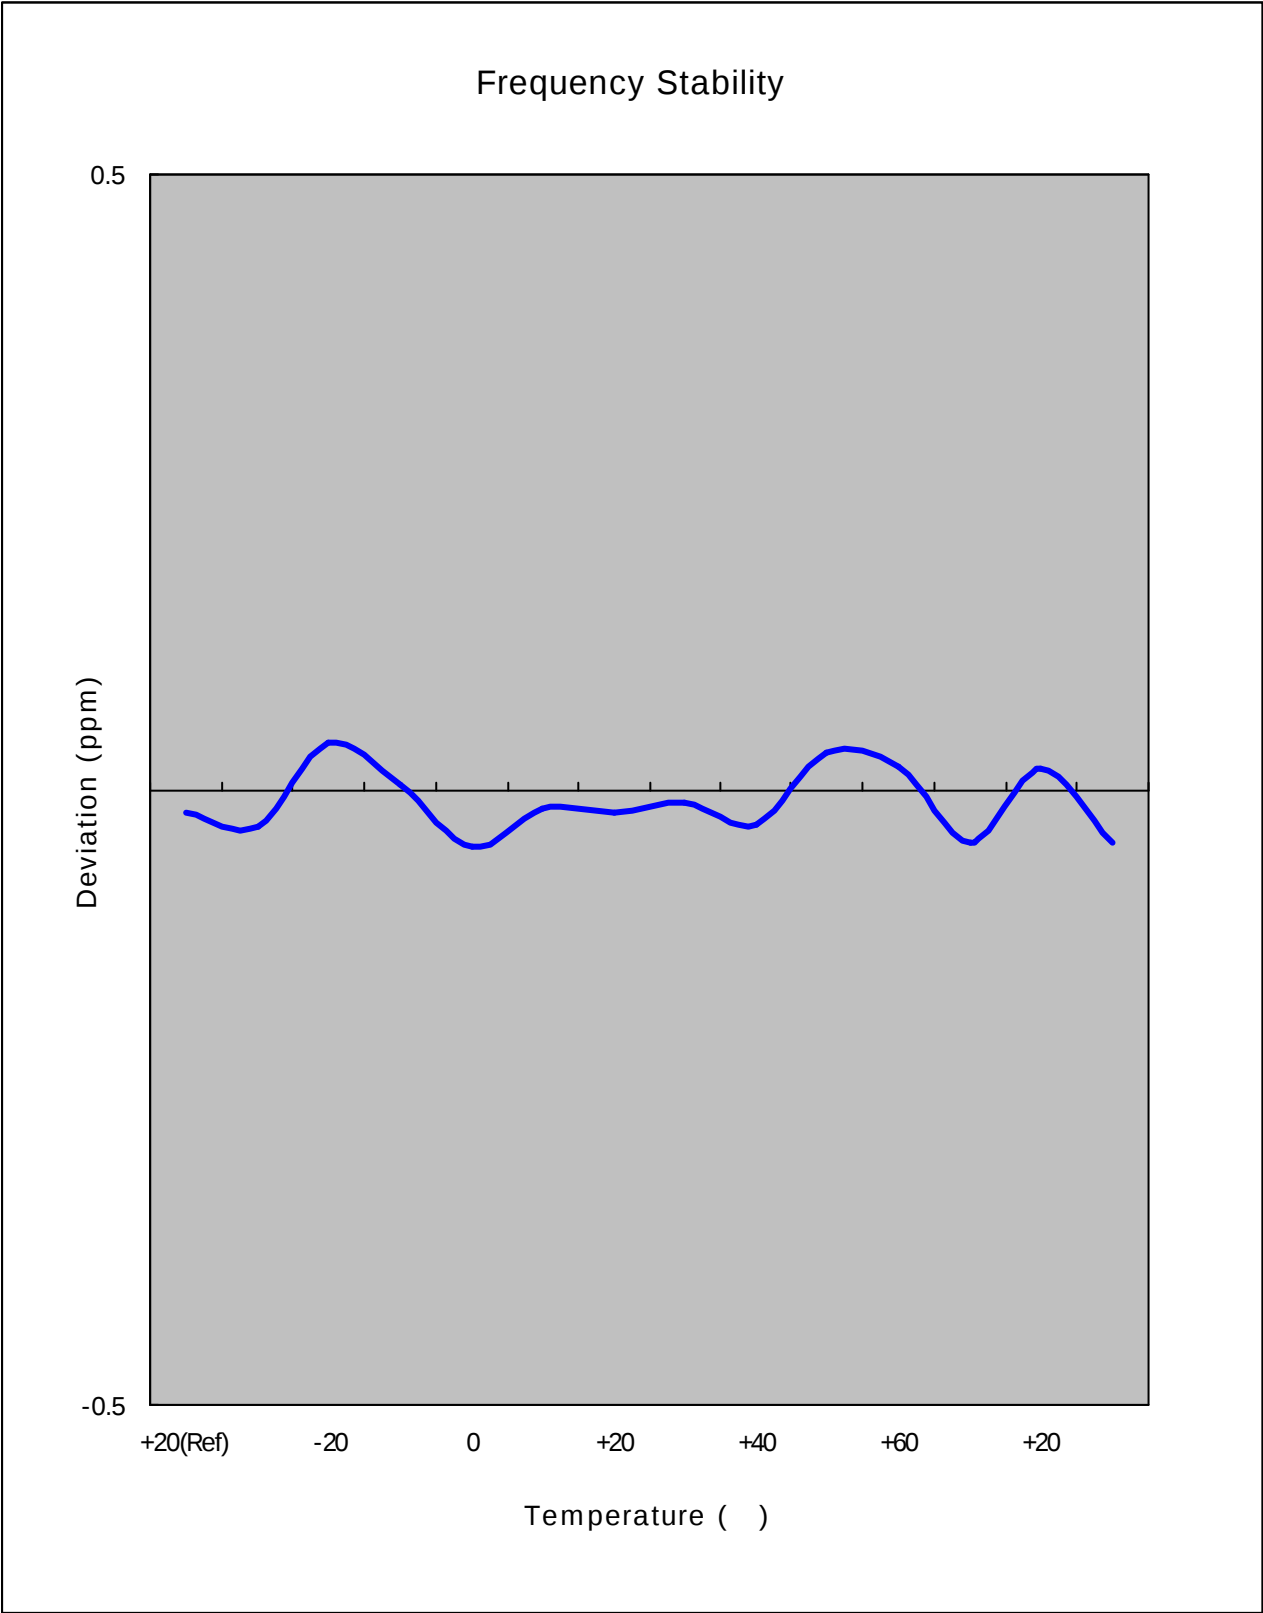

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-3.30	1,879,999,997	0.000000	-0.002
100%		-30	0.90	1,880,000,001	0.000000	0.000
100%		-20	-24.30	1,879,999,976	-0.000001	-0.013
100%		-10	34.80	1,880,000,035	0.000002	0.019
100%		0	-17.00	1,879,999,983	-0.000001	-0.009
100%		+10	27.50	1,880,000,028	0.000001	0.015
100%		+20	-3.30	1,879,999,997	0.000000	-0.002
100%		+30	-4.40	1,879,999,996	0.000000	-0.002
100%		+40	10.10	1,880,000,010	0.000001	0.005
100%		+50	34.10	1,880,000,034	0.000002	0.018
100%		+60	24.10	1,880,000,024	0.000001	0.013
85%	3.35	+20	26.60	1,880,000,027	0.000001	0.014
115%	4.26	+20	35.50	1,880,000,036	0.000002	0.019
Batt.Endpoint	3.35	+20	26.60	1,880,000,027	0.000001	0.014


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

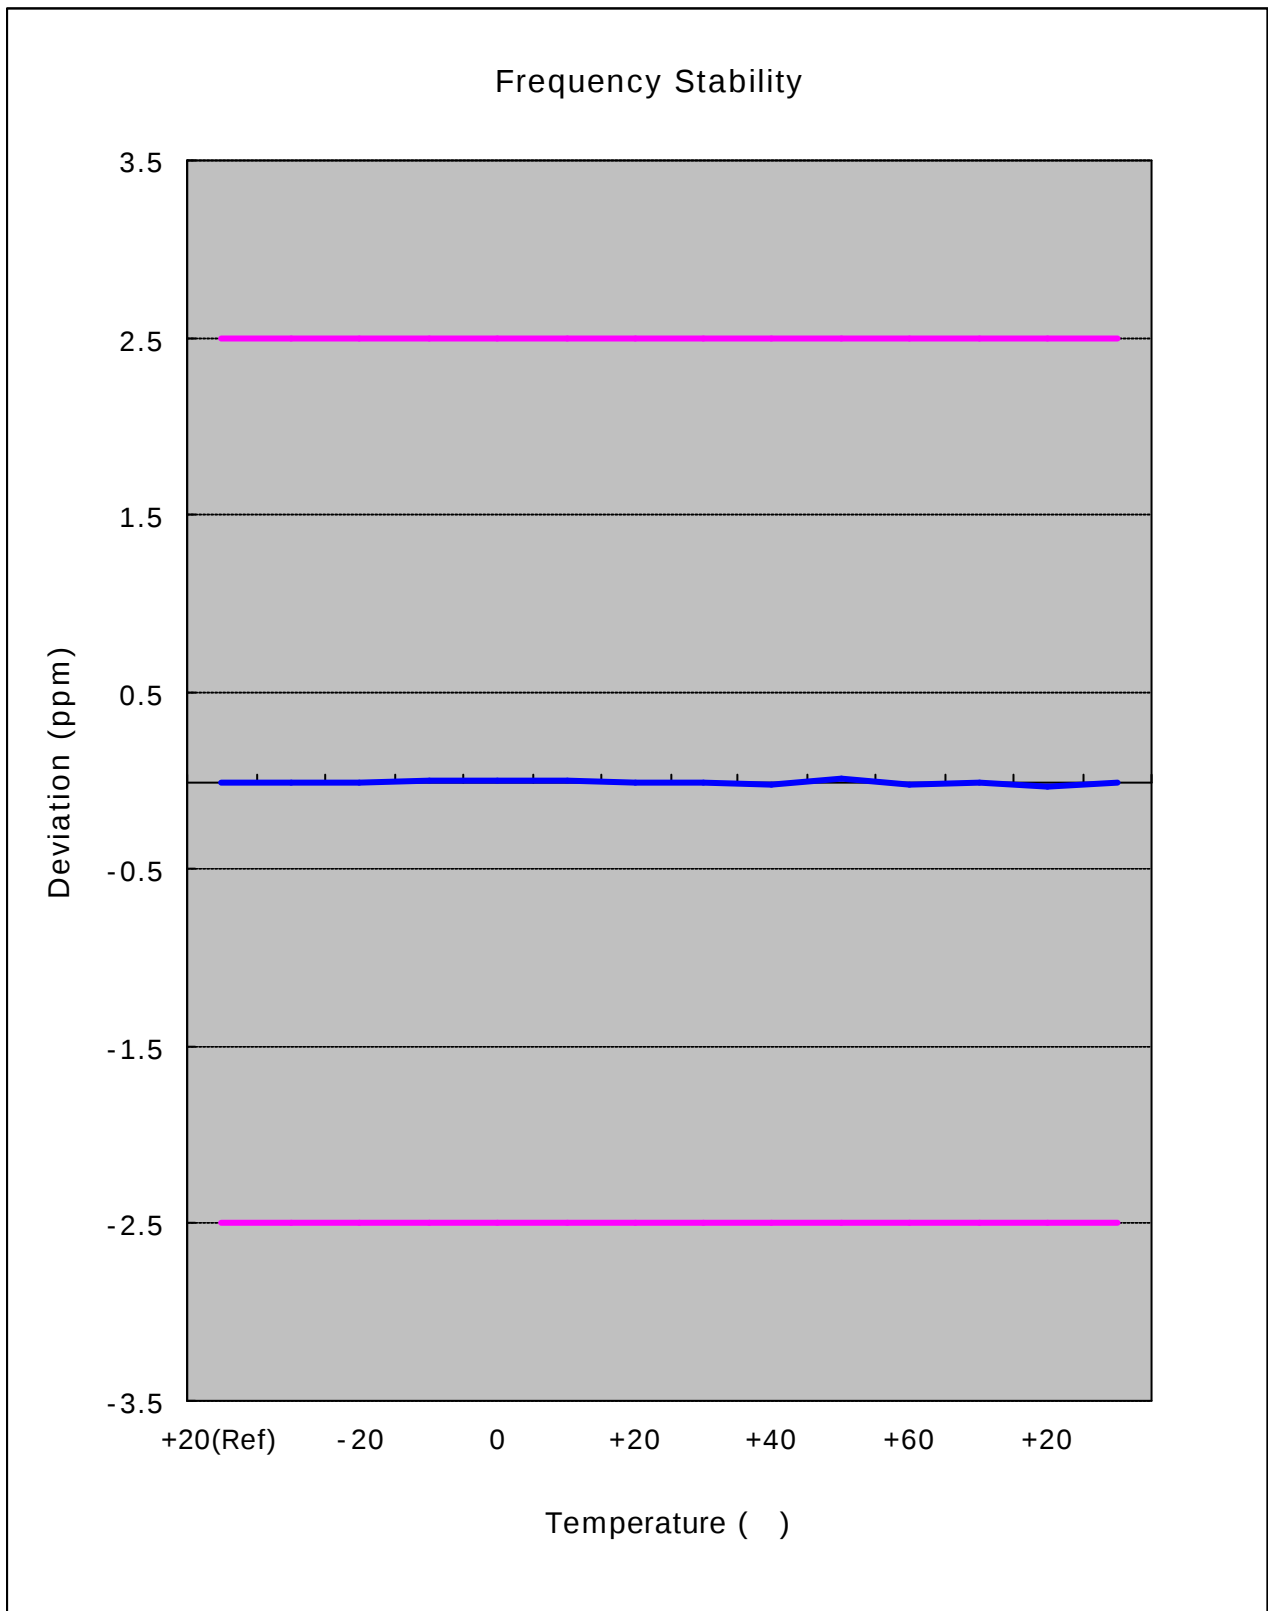

Zoom IN

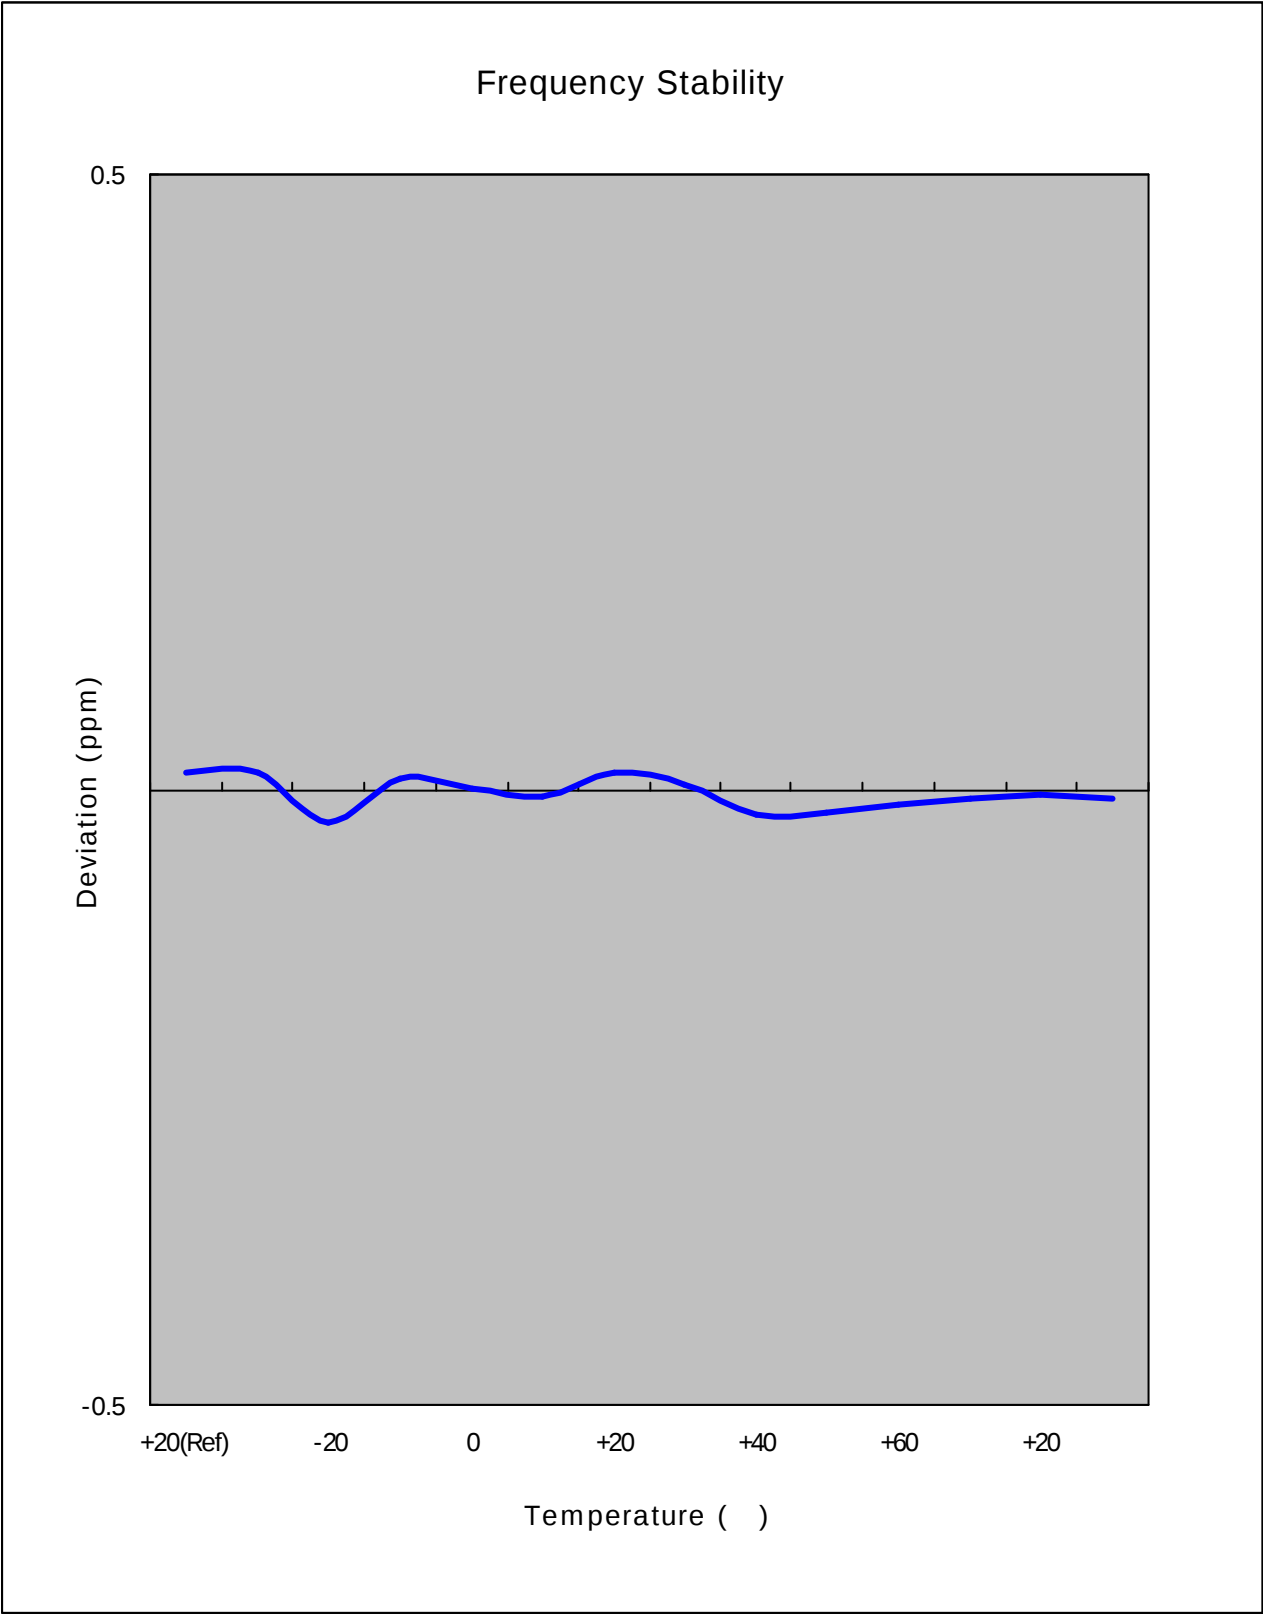



7. CONCLUSION


The data collected shows that the **SAMSUNG 850/1900 GSM/EDGE Phone with Bluetooth FCC ID : A3LSGHA697** complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850


Agilent


R T

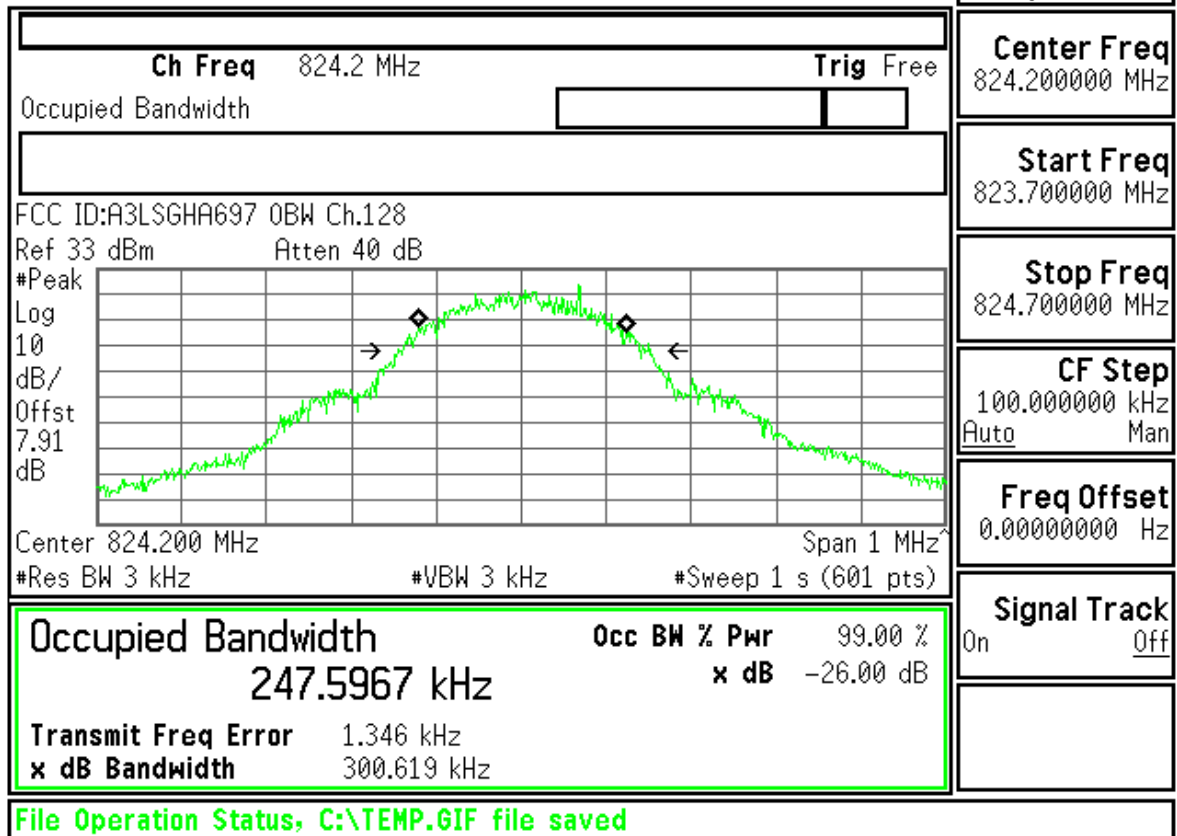

Agilent

R T

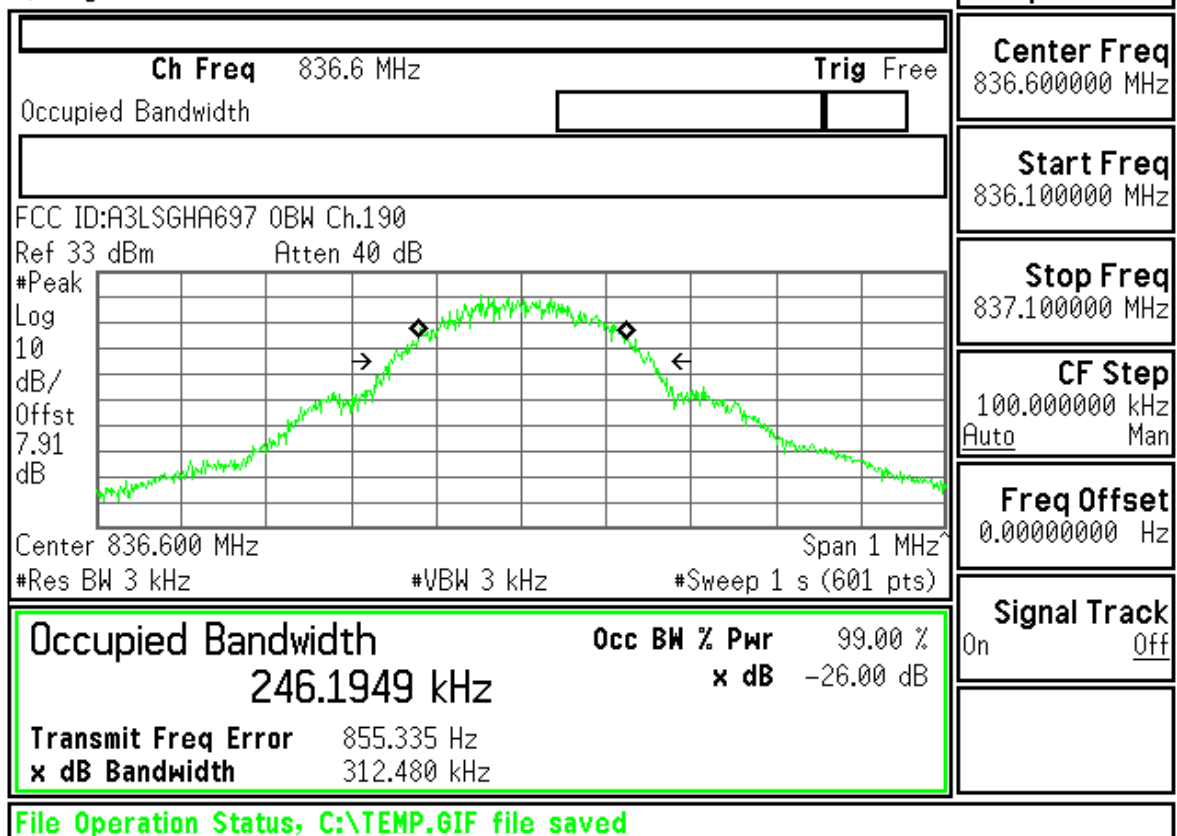


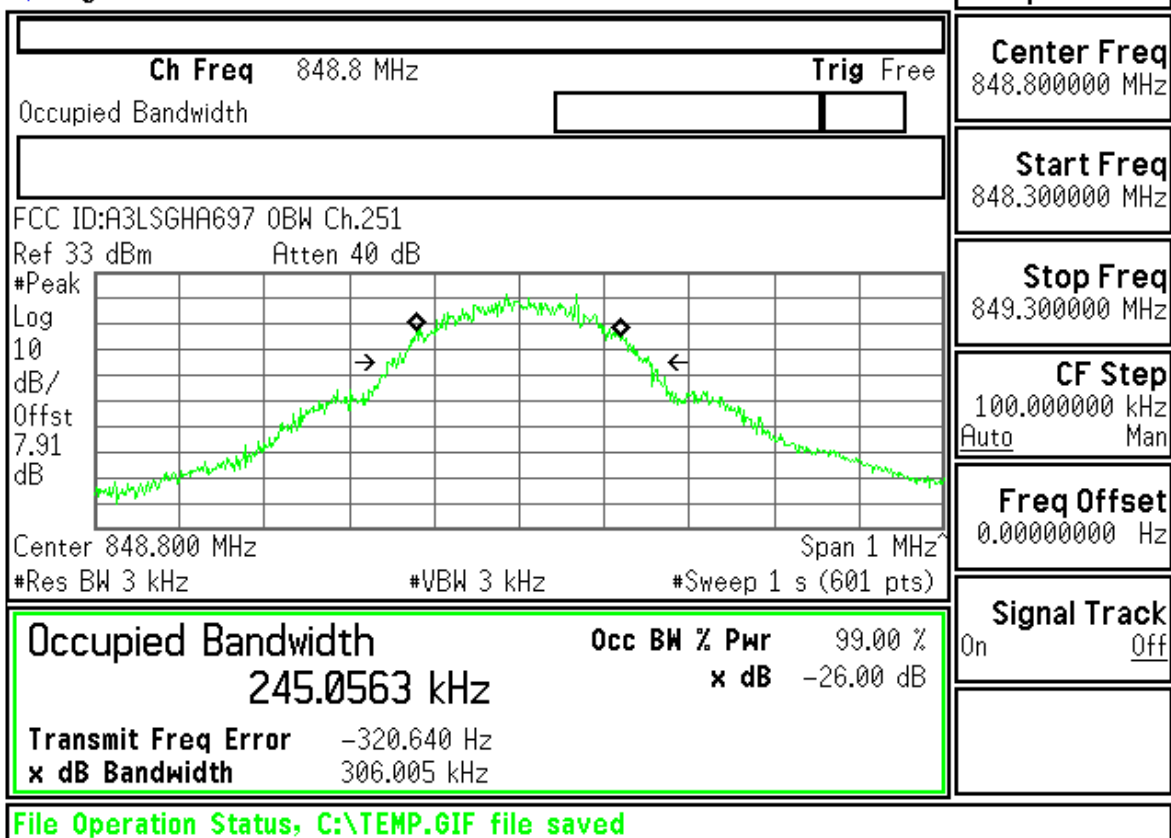




Measurement/Instrument Screen																													
Control	Transmit Power							TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>33.10</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>33.10</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	33.10	----	----	----	Estimated Carrier Power	33.10	----	----	----	Downlink Traffic Power ▾						
								Burst 1	Burst 2	Burst 3	Burst 4																		
Burst Power								33.10	----	----	----																		
Estimated Carrier Power								33.10	----	----	----																		
Swap Window Positions	Traffic Band																												
	GSM850																												
	Traffic Channel																												
	Single							128																					
	Phase & Frequency Error							MS TX Level																					
	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.23</td> <td>0.84</td> <td>-43.24</td> </tr> <tr> <td>Maximum</td> <td>3.74</td> <td>1.09</td> <td>-27.10</td> </tr> <tr> <td>Average</td> <td>2.83</td> <td>0.96</td> <td>-35.16</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.23	0.84	-43.24	Maximum	3.74	1.09	-27.10	Average	2.83	0.96	-35.16	Pass/Fail	Pass	Pass	Pass	5	
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	2.23	0.84	-43.24																										
Maximum	3.74	1.09	-27.10																										
Average	2.83	0.96	-35.16																										
Pass/Fail	Pass	Pass	Pass																										
	50 / 50 Single							Channel Mode Setup ▾																					
	Active Cell Connected Sys Type: GSM							Return																					
1 of 2				IntRef	Offset	R	T		1 of 2																				


Measurement/Instrument Screen																													
Control	Transmit Power							TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.41</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.41</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.41	----	----	----	Estimated Carrier Power	32.41	----	----	----	Downlink Traffic Power ▾						
								Burst 1	Burst 2	Burst 3	Burst 4																		
Burst Power								32.41	----	----	----																		
Estimated Carrier Power								32.41	----	----	----																		
Swap Window Positions	Traffic Band																												
	GSM850																												
	Traffic Channel																												
	Single							190																					
	Phase & Frequency Error							MS TX Level																					
	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.29</td> <td>0.84</td> <td>-41.70</td> </tr> <tr> <td>Maximum</td> <td>3.58</td> <td>1.07</td> <td>-27.80</td> </tr> <tr> <td>Average</td> <td>2.83</td> <td>0.96</td> <td>-34.17</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.29	0.84	-41.70	Maximum	3.58	1.07	-27.80	Average	2.83	0.96	-34.17	Pass/Fail	Pass	Pass	Pass	5	
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	2.29	0.84	-41.70																										
Maximum	3.58	1.07	-27.80																										
Average	2.83	0.96	-34.17																										
Pass/Fail	Pass	Pass	Pass																										
	50 / 50 Single							Channel Mode Setup ▾																					
	Active Cell Connected Sys Type: GSM							Return																					
1 of 2				IntRef	Offset	R	T		1 of 2																				



Measurement/Instrument Screen																																	
Control		Transmit Power						TCH Parms																									
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.33</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.33</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.33	----	----	----	Estimated Carrier Power	32.33	----	----	----	Downlink Traffic Power										
	Burst 1	Burst 2	Burst 3	Burst 4																													
Burst Power	32.33	----	----	----																													
Estimated Carrier Power	32.33	----	----	----																													
Swap Window Positions		Single						Traffic Band																									
								GS1850																									
								Traffic Channel																									
								251																									
		<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.68</td> <td>0.96</td> <td>-37.86</td> </tr> <tr> <td>Maximum</td> <td>4.89</td> <td>1.17</td> <td>-28.42</td> </tr> <tr> <td>Average</td> <td>3.14</td> <td>1.07</td> <td>-32.69</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>						Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.68	0.96	-37.86	Maximum	4.89	1.17	-28.42	Average	3.14	1.07	-32.69	Pass/Fail	Pass	Pass	Pass	MS TX Level	
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	2.68	0.96	-37.86																														
Maximum	4.89	1.17	-28.42																														
Average	3.14	1.07	-32.69																														
Pass/Fail	Pass	Pass	Pass																														
		50/50						5																									
								Channel Mode Setup																									
								Return																									
		<table border="1"> <tr> <td colspan="2">Active Cell Connected</td> <td colspan="2">Sys Type: GSM</td> </tr> </table>						Active Cell Connected		Sys Type: GSM																							
Active Cell Connected		Sys Type: GSM																															
1 of 2		<table border="1"> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> </tr> </table>						IntRef	Offset	R	T	1 of 2																					
IntRef	Offset	R	T																														



Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power																					
Change View								Traffic Band																					
								GS1850																					
								Traffic Channel																					
								128																					
								MS TX Level																					
								5																					
		<table border="1"> <thead> <tr> <th>Burst</th> <th>Px Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.10</td> <td>GSMK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	Px Power (dBm)	Modulation	Mask	1	33.10	GSMK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Channel Mode Setup	
Burst	Px Power (dBm)	Modulation	Mask																										
1	33.10	GSMK	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
		Continuous						Return																					
		<table border="1"> <tr> <td colspan="2">Active Cell Connected</td> <td colspan="2">Sys Type: GSM</td> </tr> </table>						Active Cell Connected		Sys Type: GSM																			
Active Cell Connected		Sys Type: GSM																											
1 of 2		<table border="1"> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> </tr> </table>						IntRef	Offset	R	T	1 of 2																	
IntRef	Offset	R	T																										

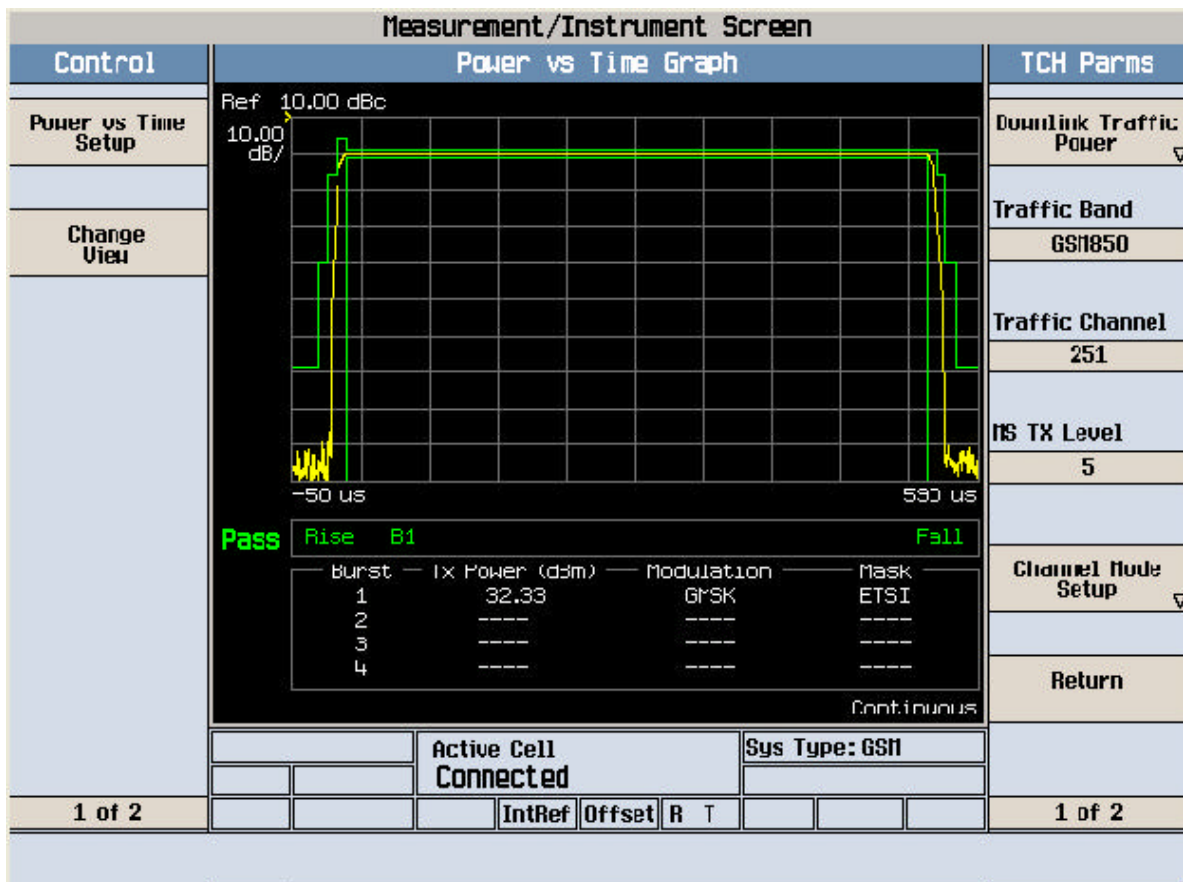
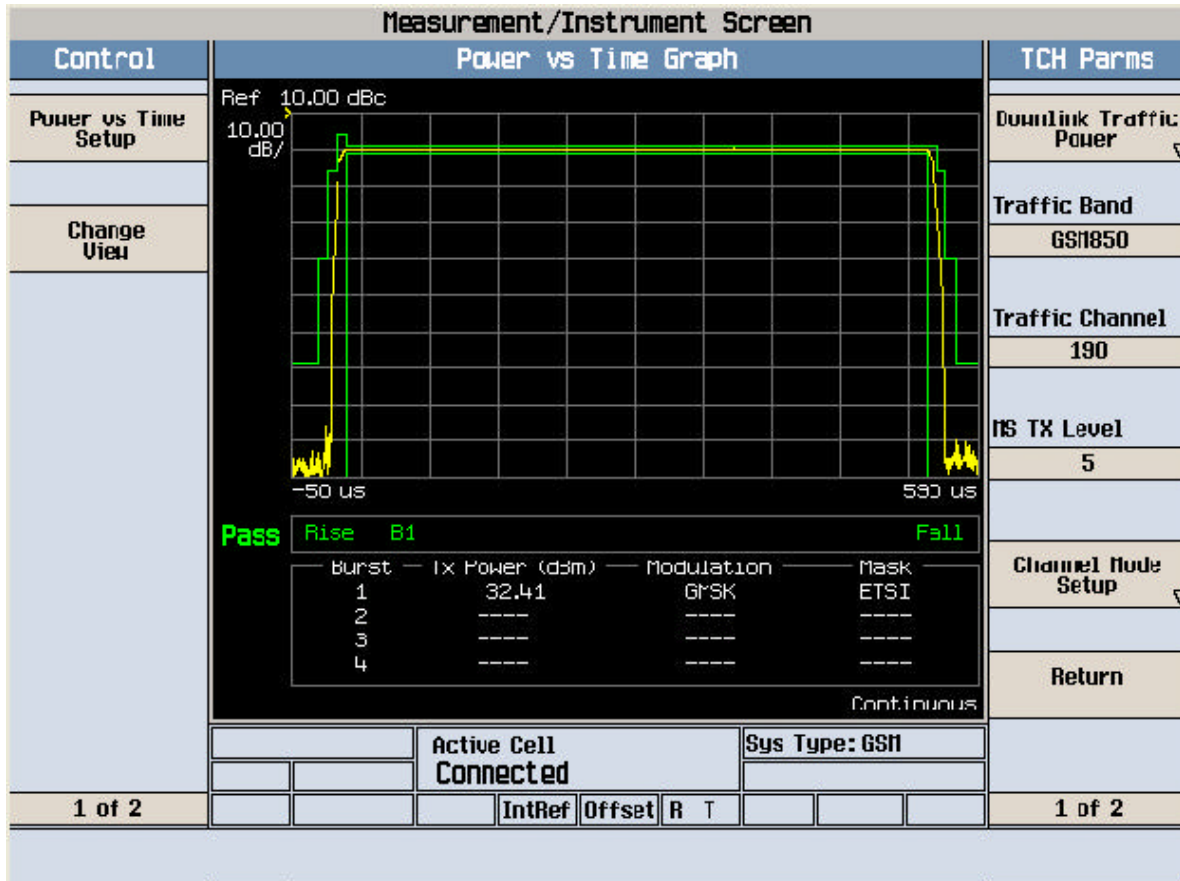


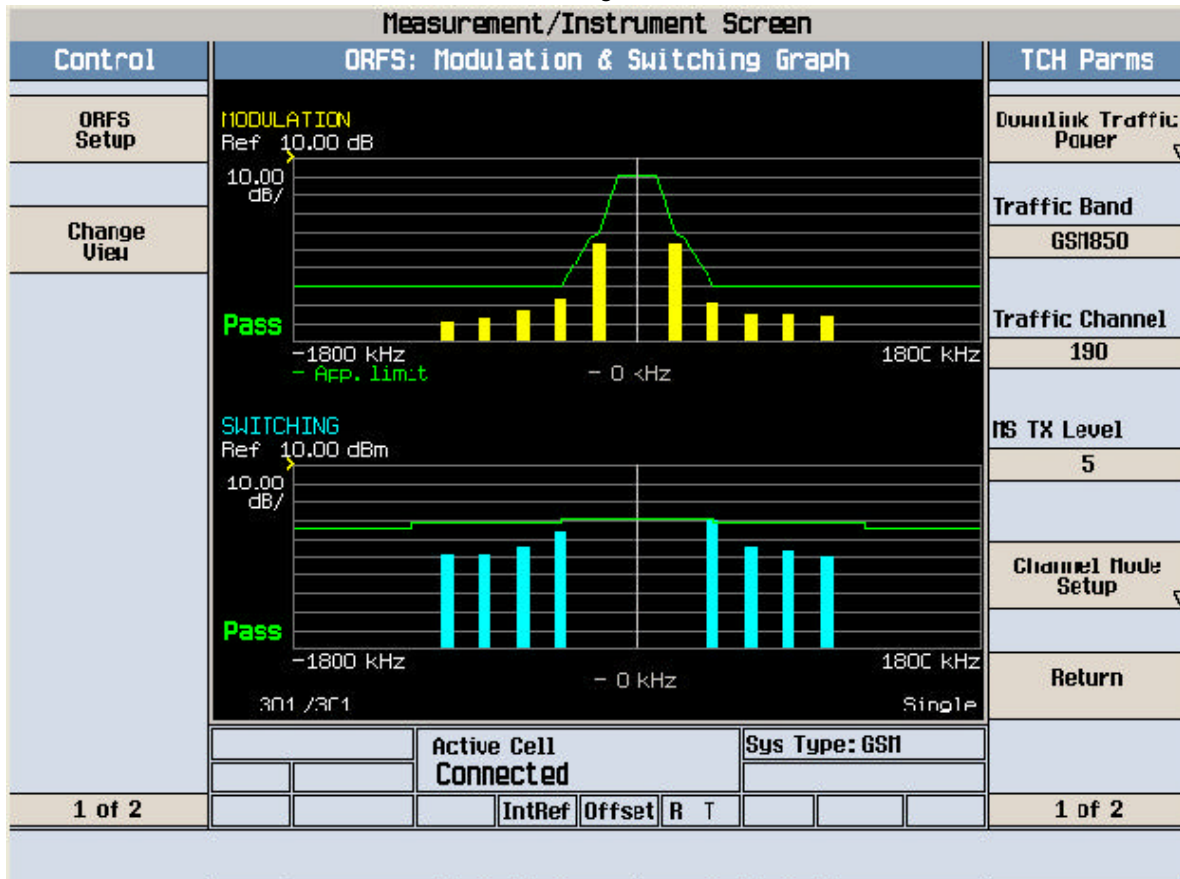
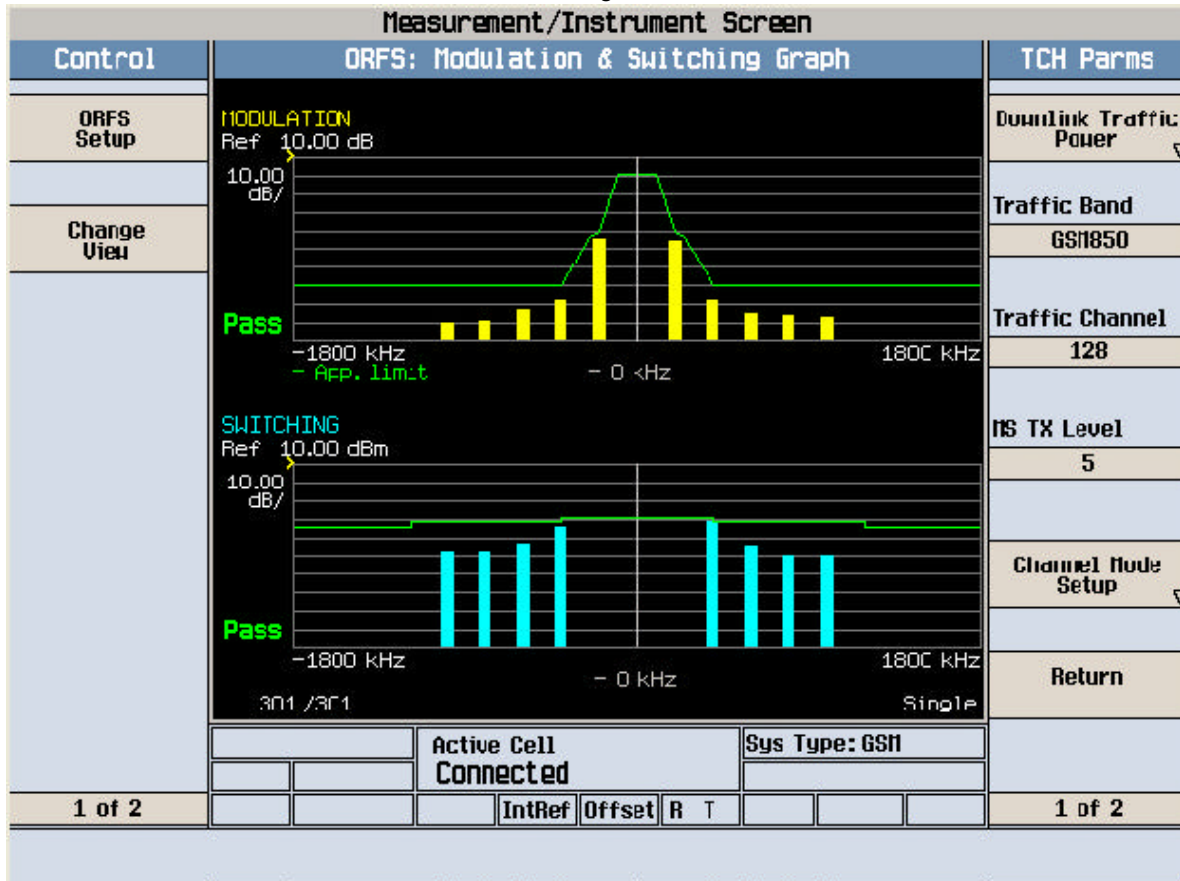



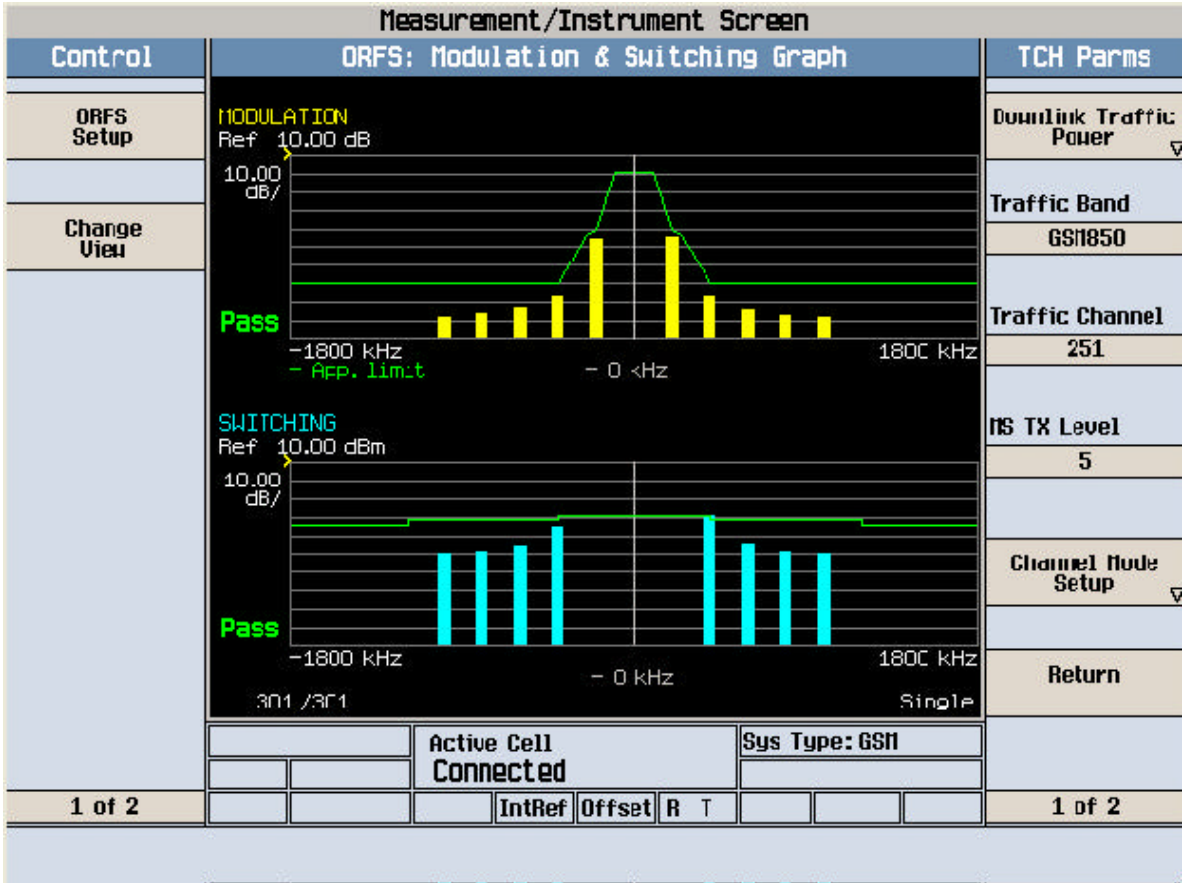


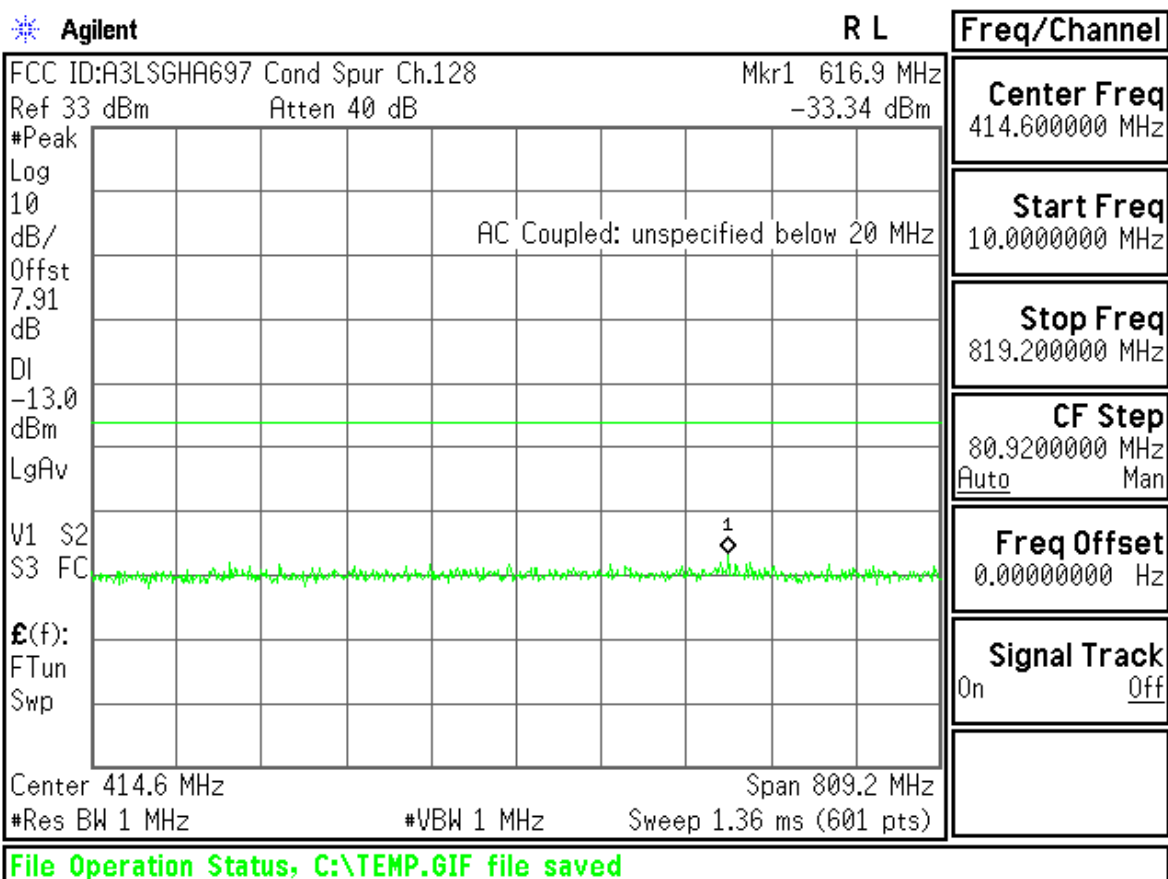
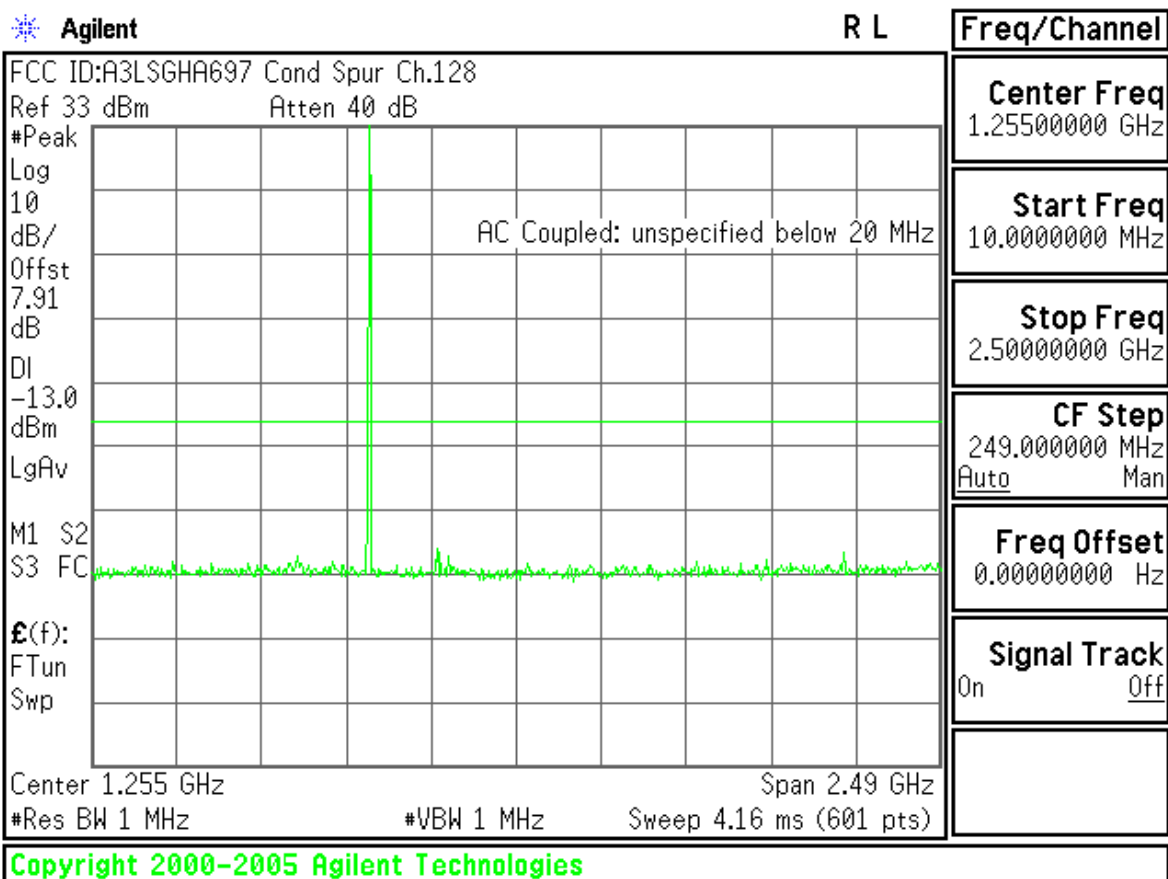


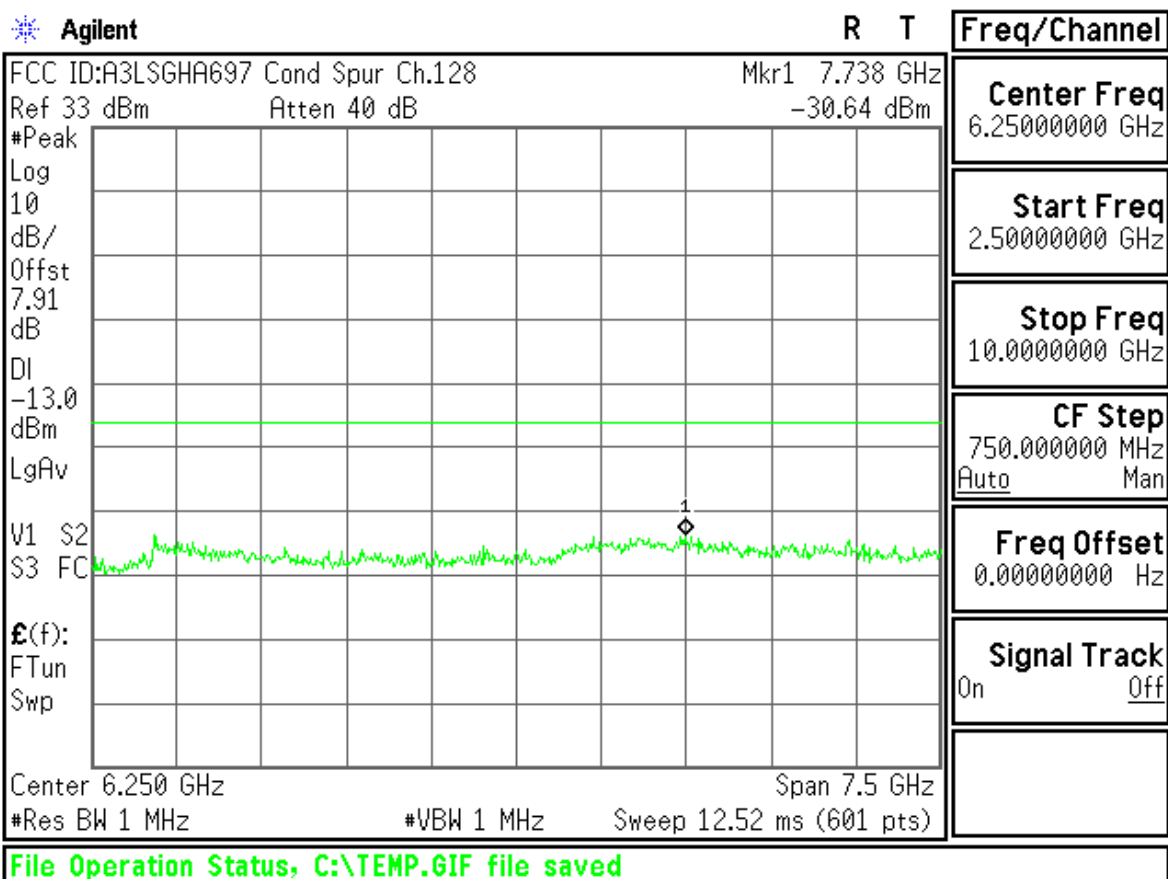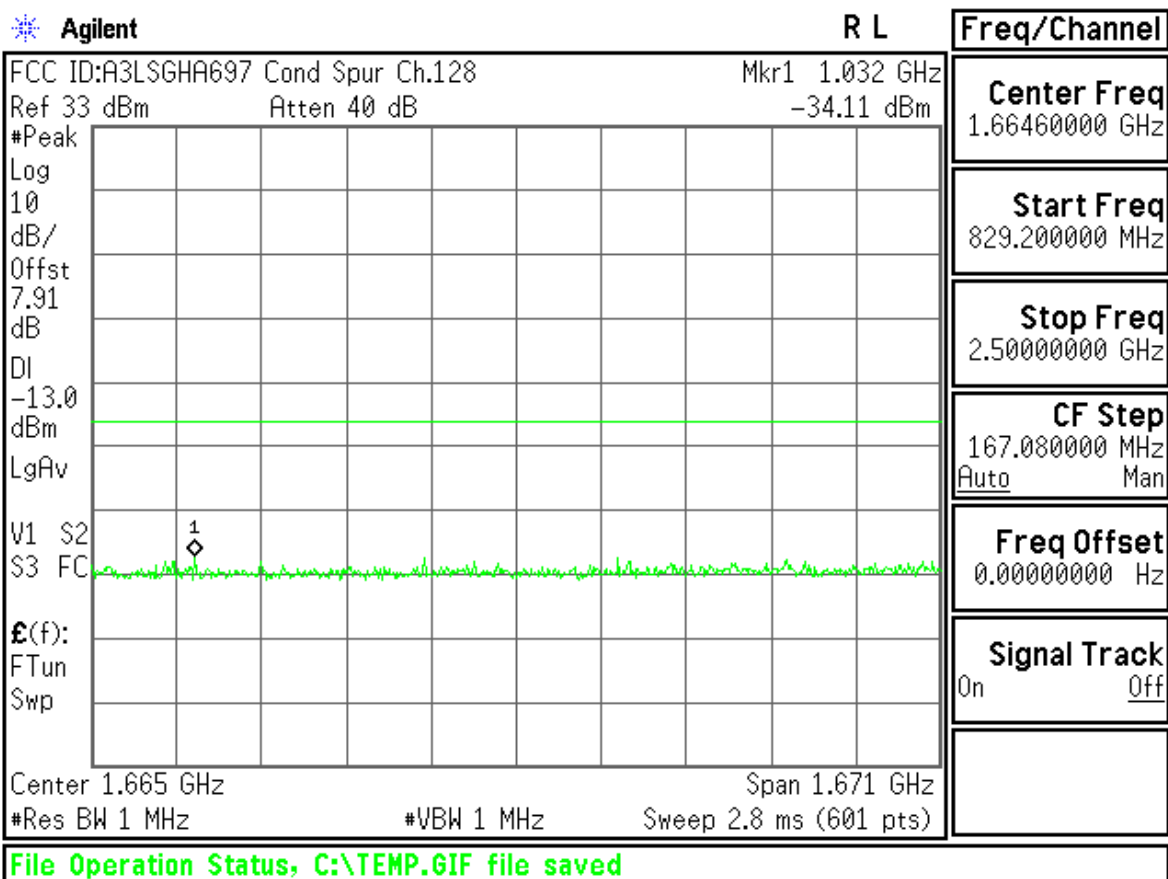

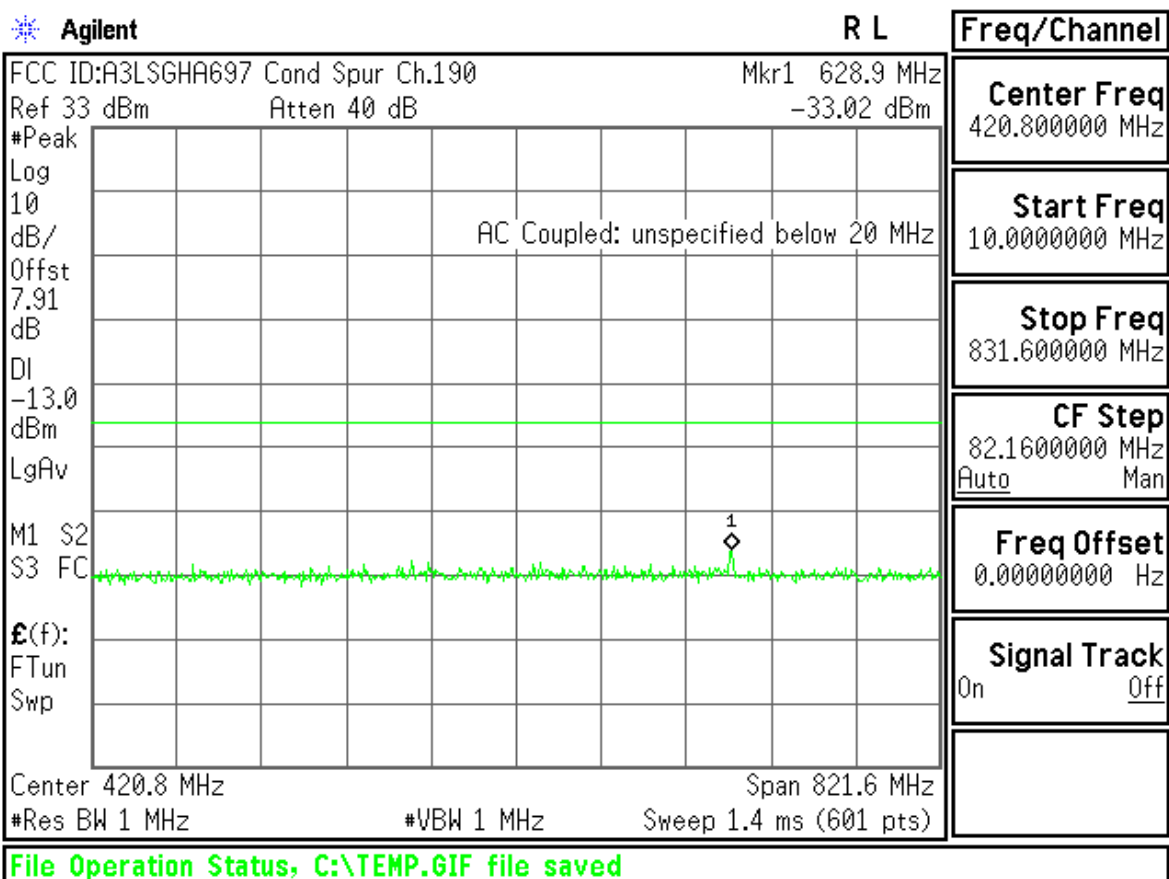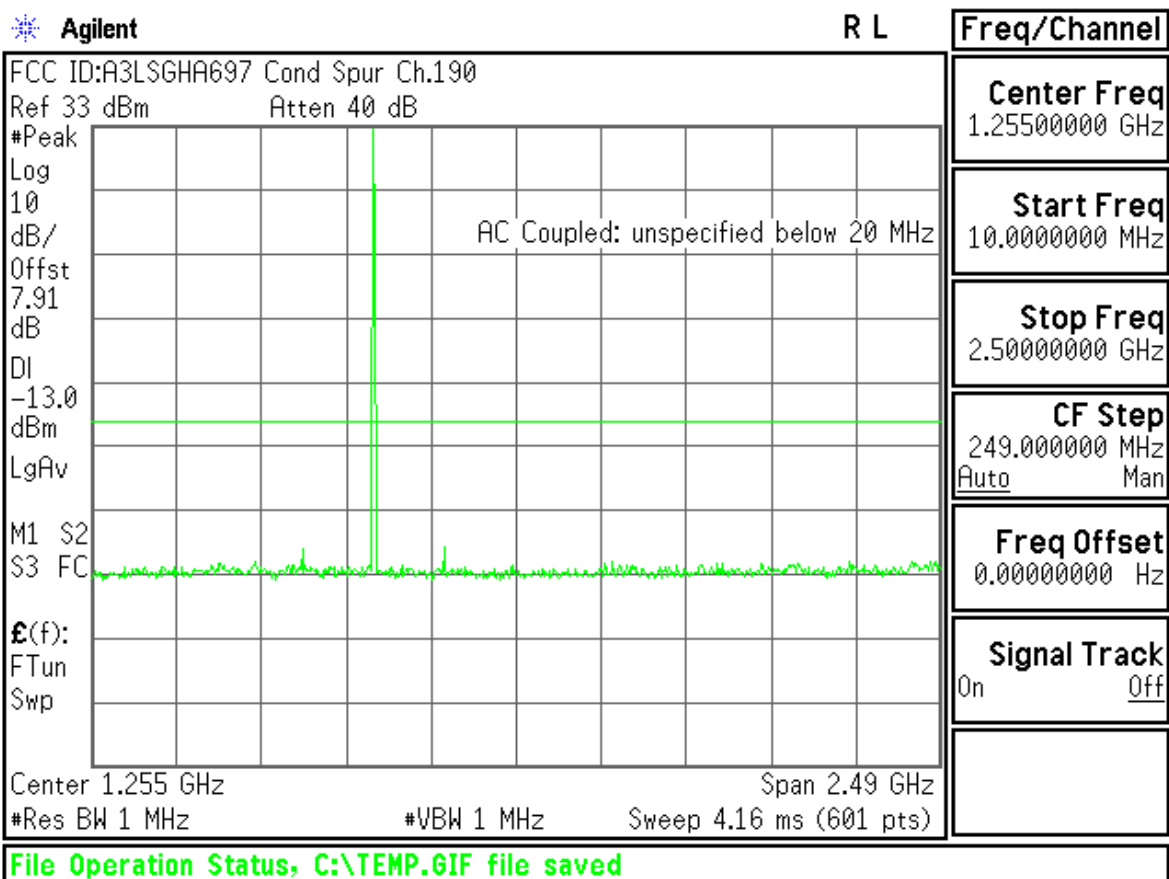

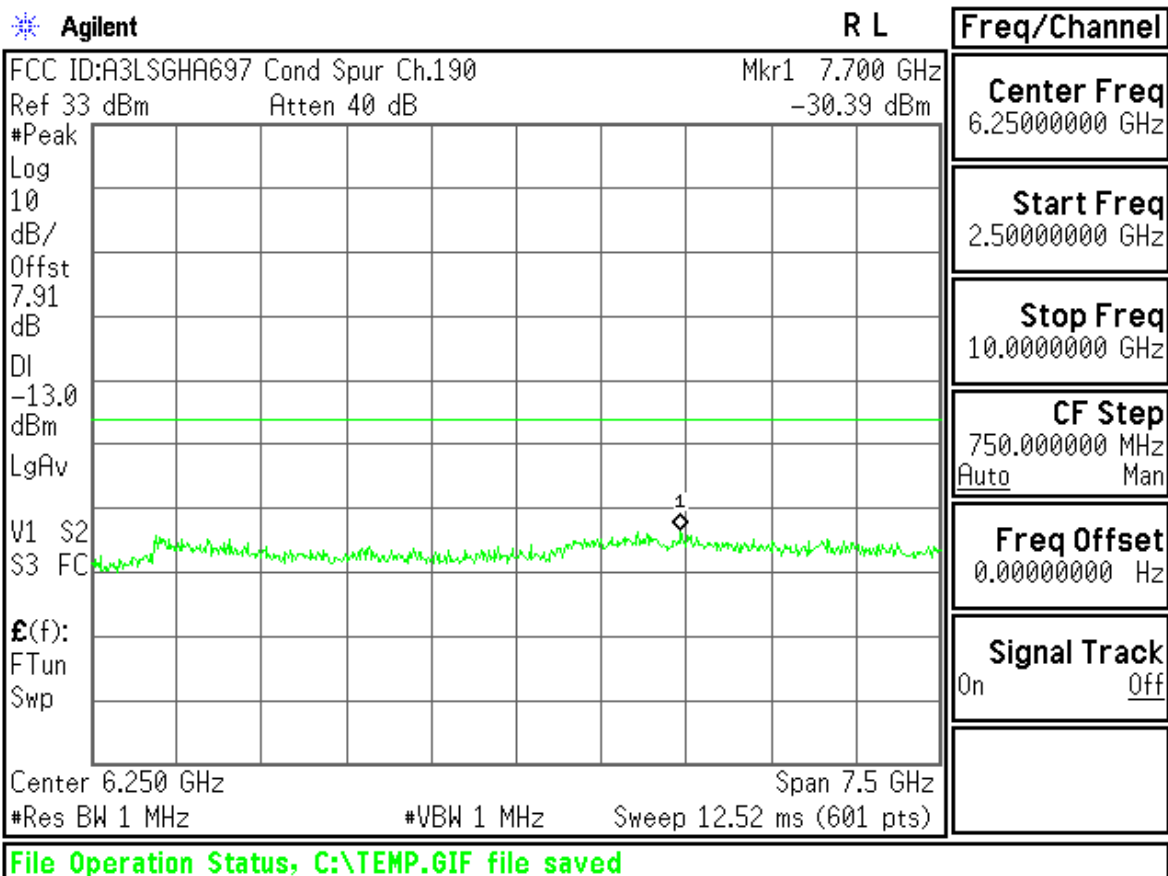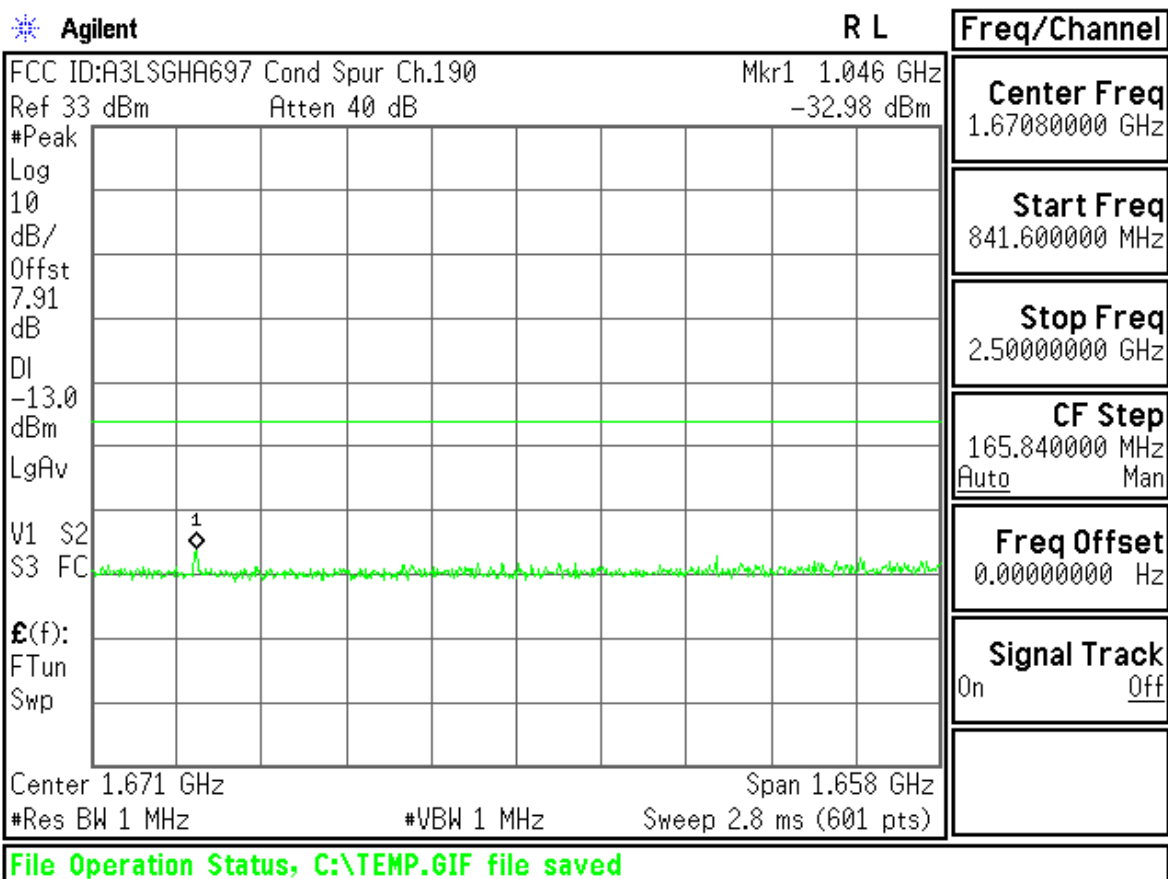

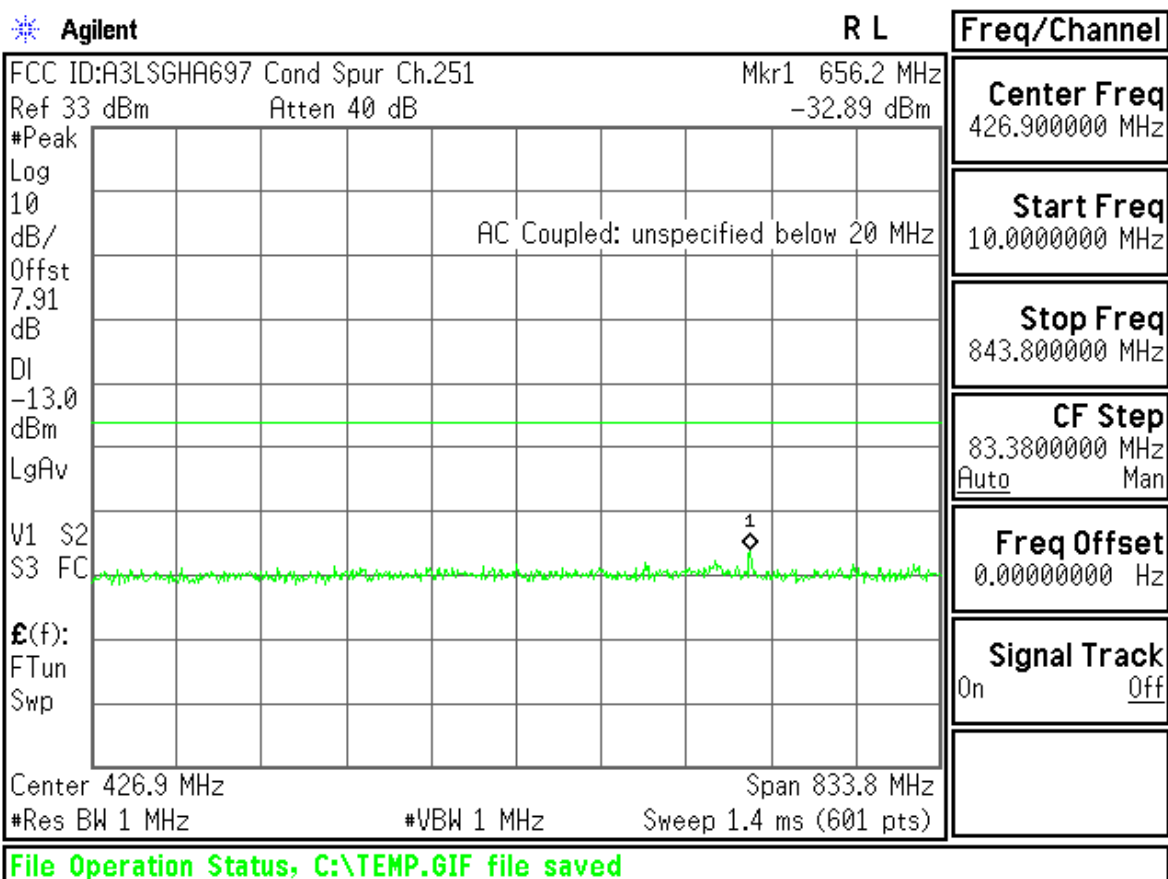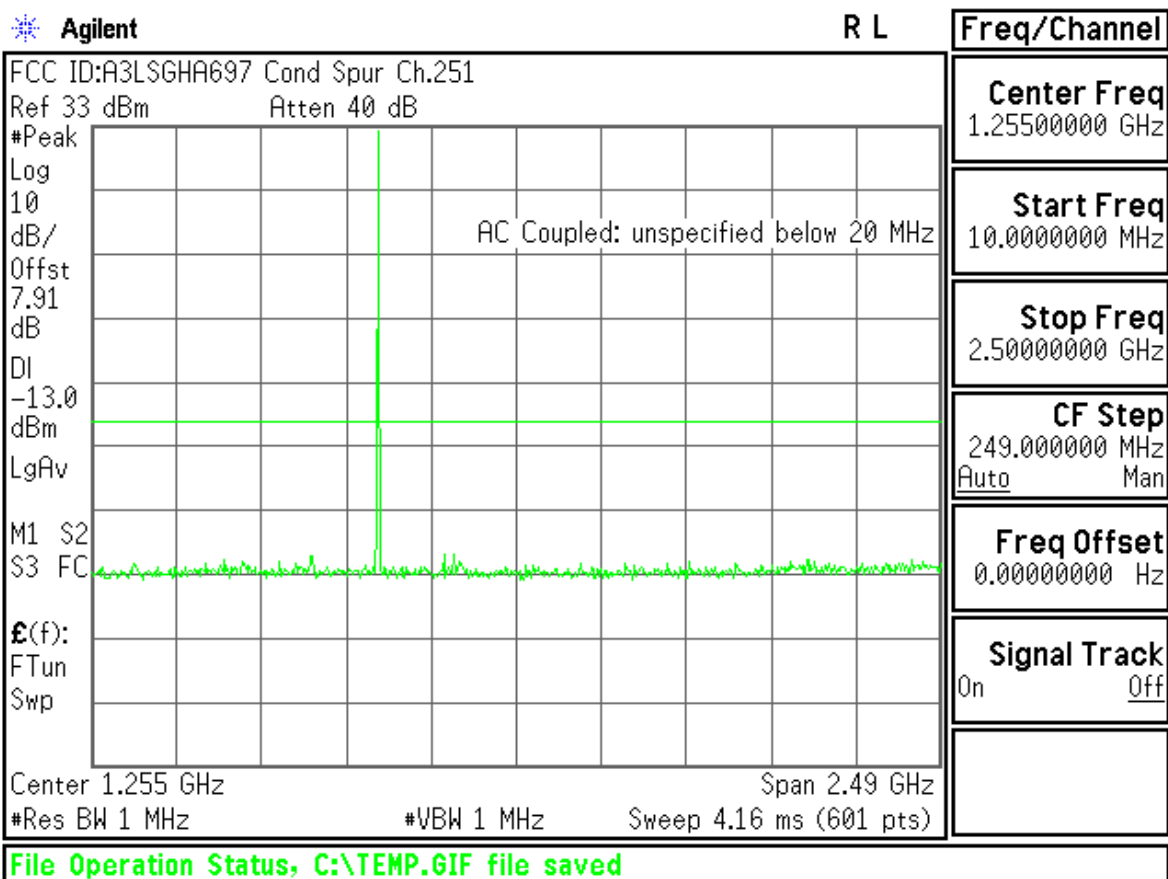

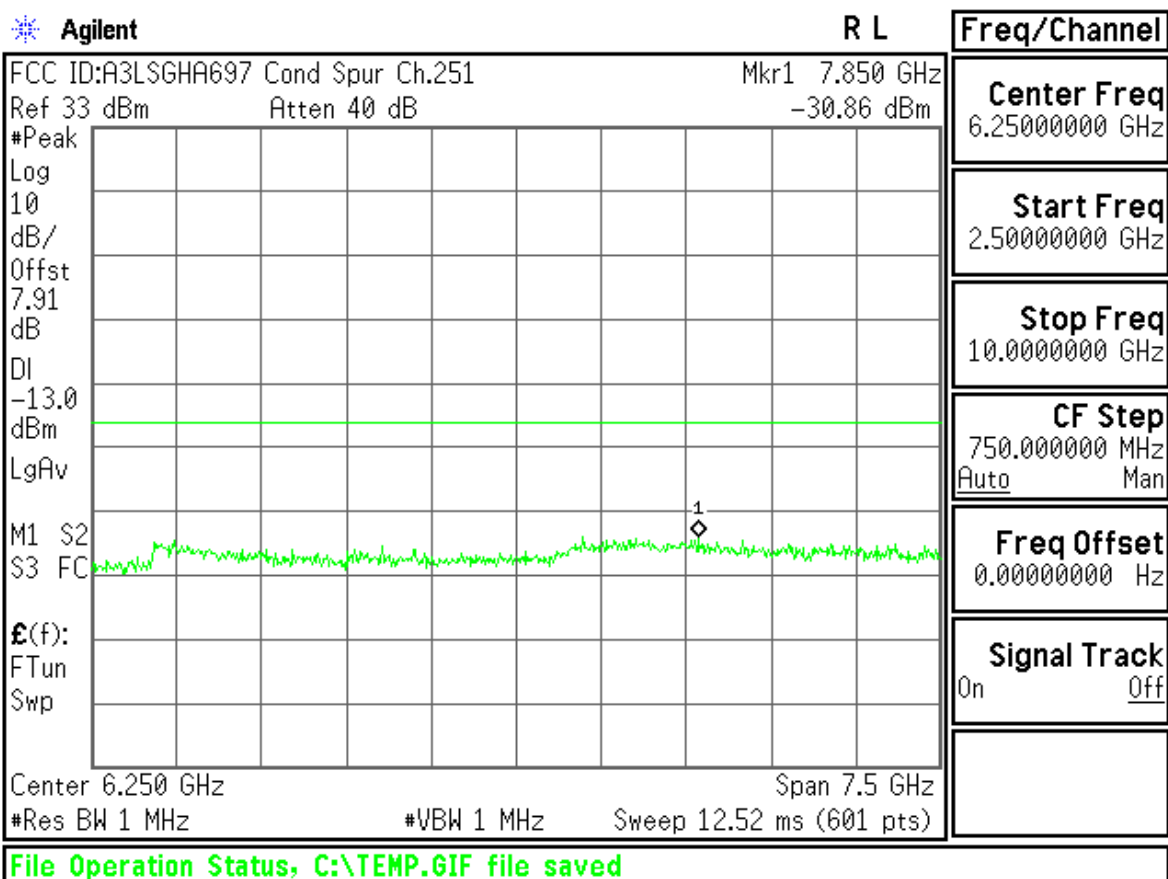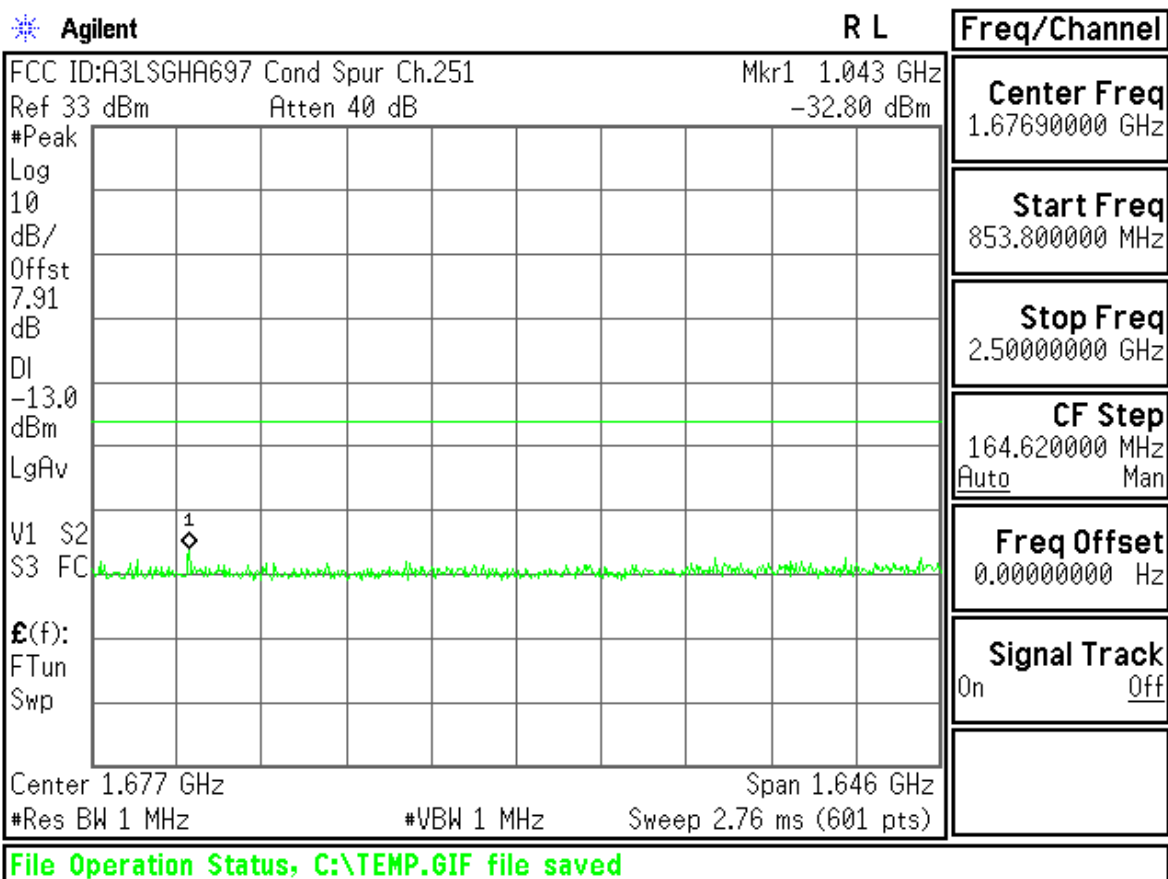

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

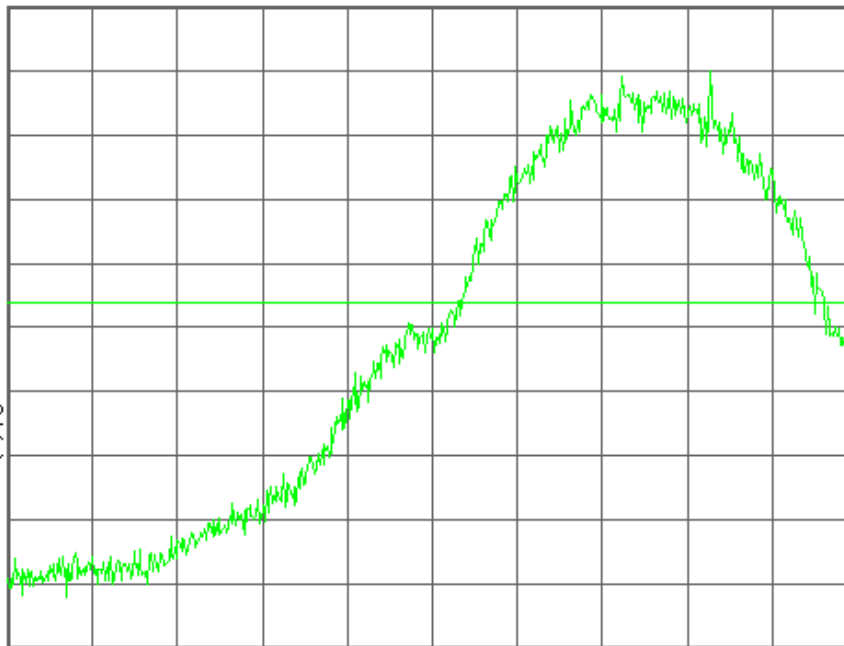

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.128

Mkr1 823.978 6 MHz

Ref 33 dBm

Atten 40 dB

-15.47 dBm

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

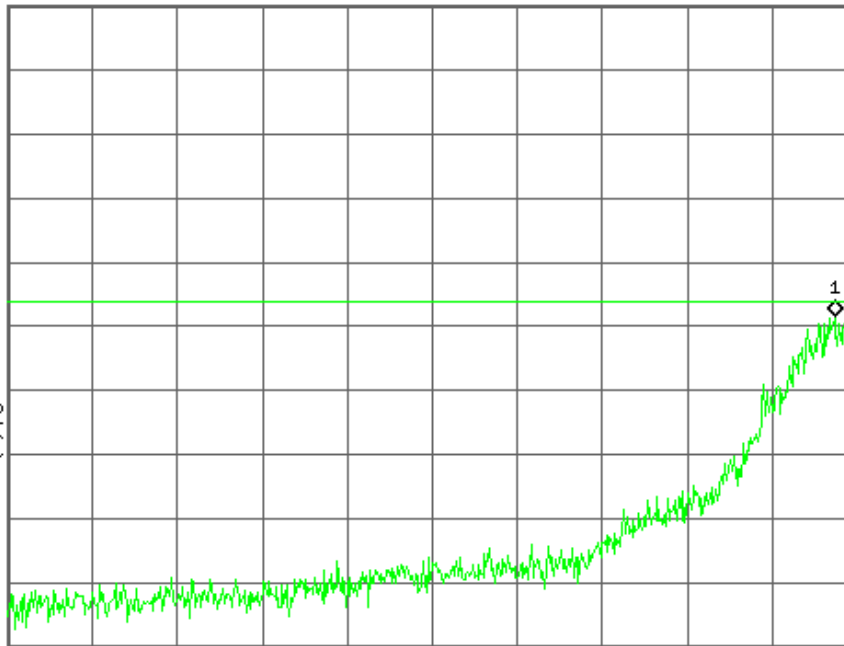

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

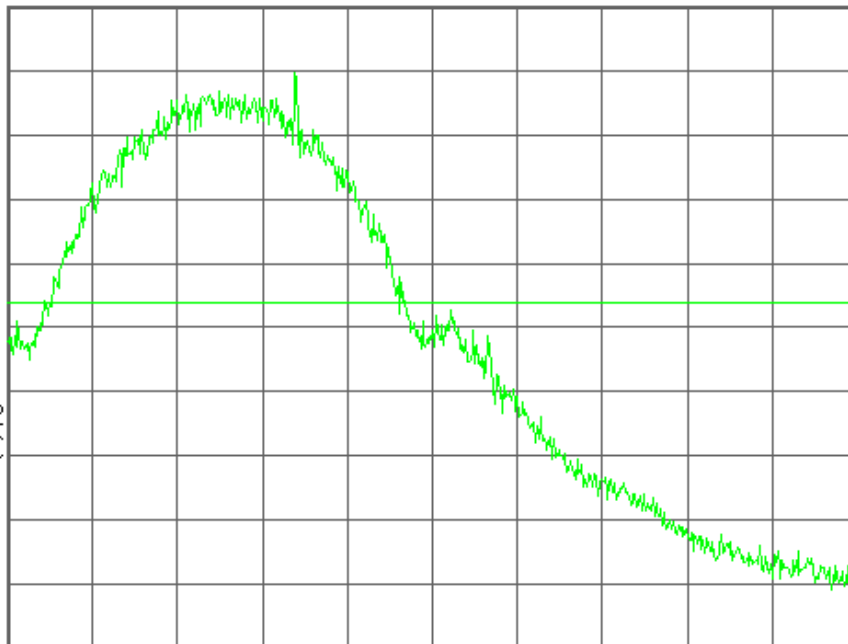

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.251

Mkr1 849.021 4 MHz

Ref 33 dBm

Atten 40 dB

-14.56 dBm

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

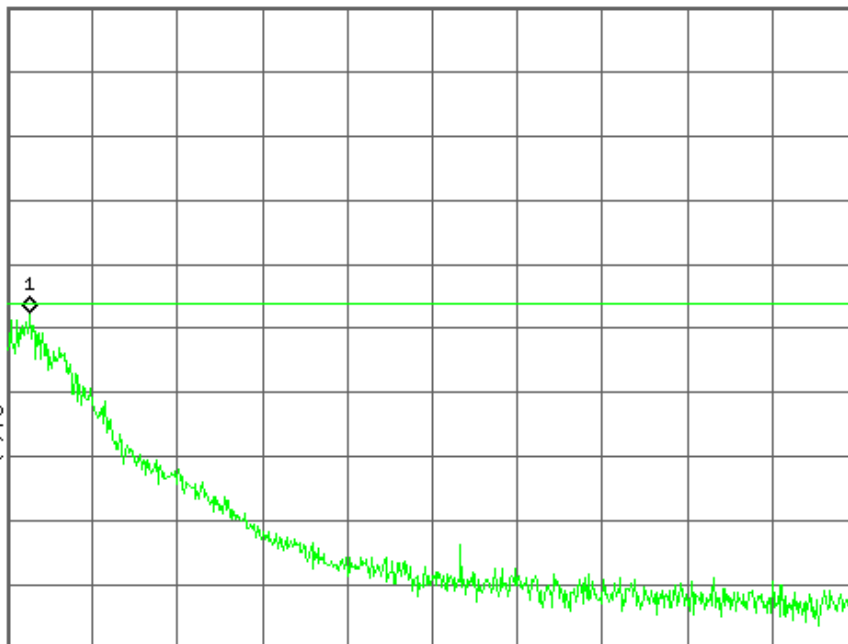

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent


R T

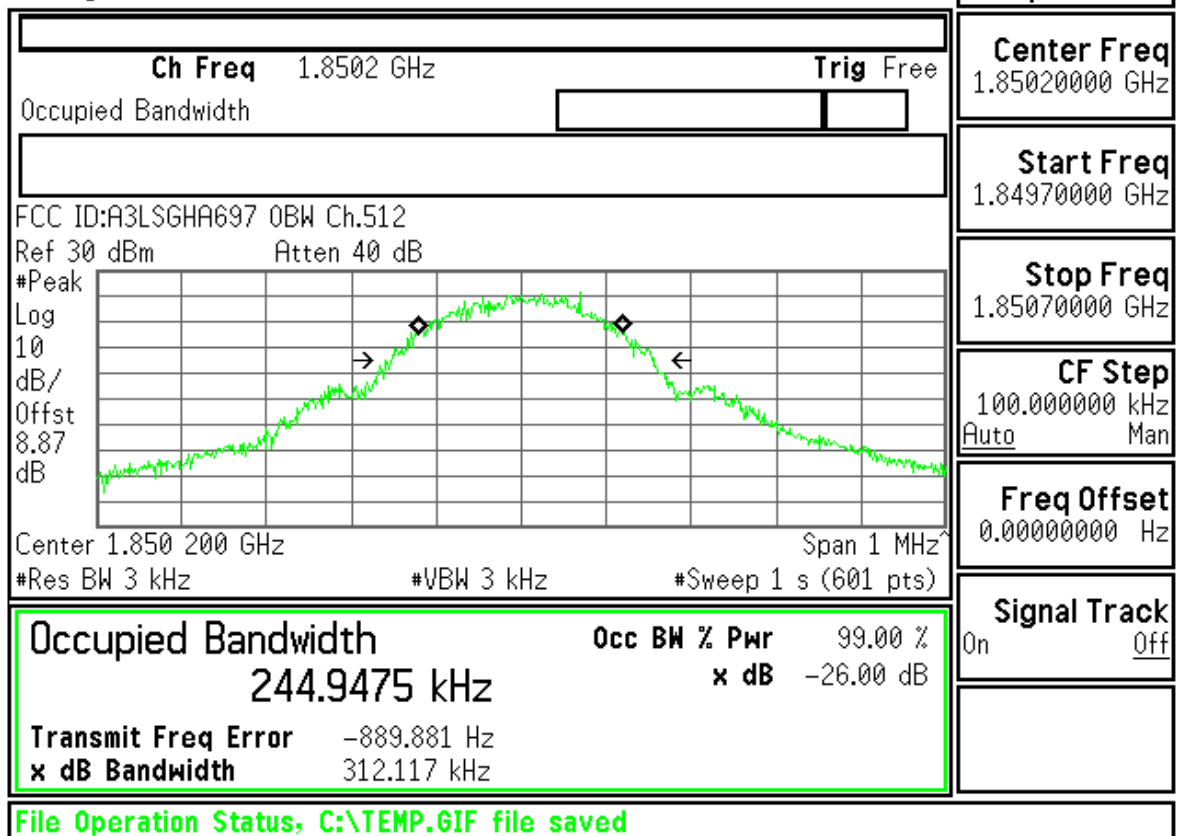


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

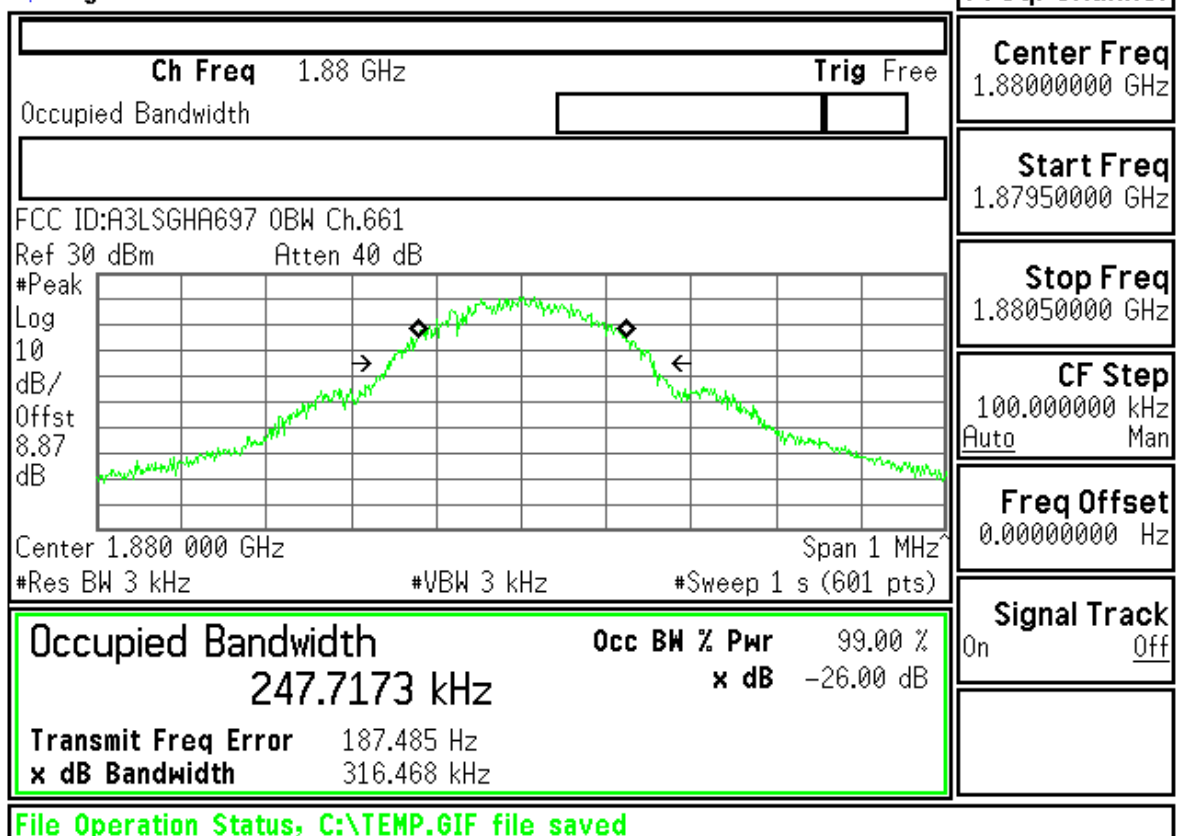

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


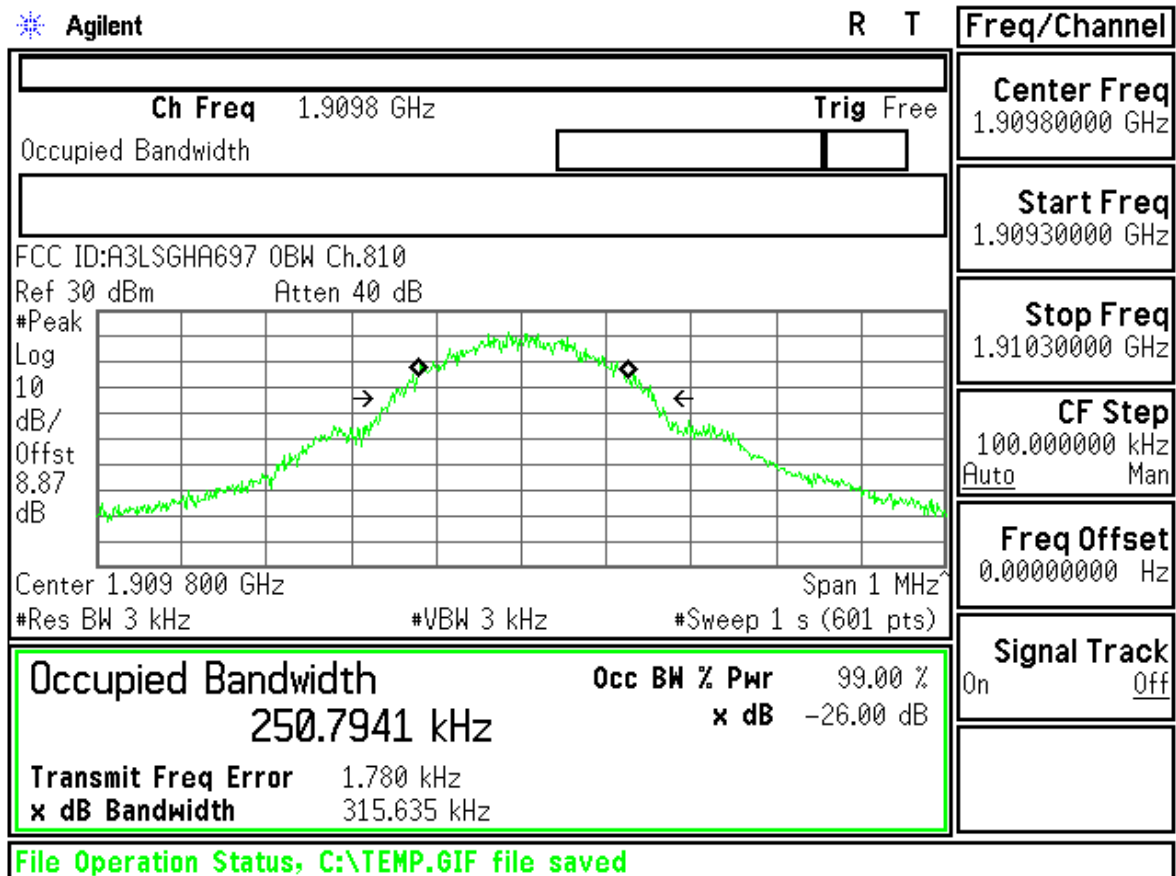




FCC ID : A3LSGHA697 Transmit Power 512CH



Measurement/Instrument Screen																																
Control		Transmit Power								TCH Parms																						
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>30.12</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>30.12</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	30.12	----	----	----	Estimated Carrier Power	30.12	----	----	----	Downlink Traffic Power ▾							
											Burst 1	Burst 2	Burst 3	Burst 4																		
										Burst Power	30.12	----	----	----																		
		Estimated Carrier Power	30.12	----	----	----																										
		Traffic Band																														
PCS																																
Single								Traffic Channel																								
								512																								
Setup Window Positions		Phase & Frequency Error								MS TX Level																						
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>4.78</td><td>1.80</td><td>-85.50</td></tr><tr><td>Maximum</td><td>9.83</td><td>2.81</td><td>-48.06</td></tr><tr><td>Average</td><td>6.63</td><td>2.30</td><td>-69.32</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.78	1.80	-85.50	Maximum	9.83	2.81	-48.06	Average	6.63	2.30	-69.32	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾		
											Peak Phase °	RMS Phase °	Frequency Hz																			
										Minimum	4.78	1.80	-85.50																			
										Maximum	9.83	2.81	-48.06																			
Average	6.63	2.30	-69.32																													
Pass/Fail	Pass	Pass	Pass																													
Return																																
50 / 50								Single																								
1 of 2				Active Cell Connected				Sys Type: GSM																								
				IntRef		Offset	R T																									
										1 of 2																						



Measurement/Instrument Screen																															
Control		Transmit Power						TCH Parms																							
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>30.17</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>30.17</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	30.17	----	----	----	Estimated Carrier Power	30.17	----	----	----	Downlink Traffic Power ▾								
									Burst 1	Burst 2	Burst 3	Burst 4																			
								Burst Power	30.17	----	----	----																			
								Estimated Carrier Power	30.17	----	----	----																			
Traffic Band																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>5.35</td> <td>2.00</td> <td>-82.66</td> </tr> <tr> <td>Maximum</td> <td>8.44</td> <td>3.34</td> <td>-40.09</td> </tr> <tr> <td>Average</td> <td>7.26</td> <td>2.77</td> <td>-63.71</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.35	2.00	-82.66	Maximum	8.44	3.34	-40.09	Average	7.26	2.77	-63.71	Pass/Fail	Pass	Pass	Pass	PCS			
									Peak Phase °	RMS Phase °	Frequency Hz																				
								Minimum	5.35	2.00	-82.66																				
								Maximum	8.44	3.34	-40.09																				
Average	7.26	2.77	-63.71																												
Pass/Fail	Pass	Pass	Pass																												
Traffic Channel																															
1 of 2		50 / 50 Single Active Cell Connected Sys Type: GSM IntRef Offset R T						661																							
								MS TX Level																							
								0																							
								Channel Mode Setup ▾																							
								Return																							
								1 of 2																							



Measurement/Instrument Screen																															
Control		Transmit Power						TCH Parms																							
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>30.29</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>30.29</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	30.29	----	----	----	Estimated Carrier Power	30.29	----	----	----	Downlink Traffic Power ▾								
									Burst 1	Burst 2	Burst 3	Burst 4																			
								Burst Power	30.29	----	----	----																			
								Estimated Carrier Power	30.29	----	----	----																			
Traffic Band																															
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>5.53</td> <td>2.00</td> <td>-82.71</td> </tr> <tr> <td>Maximum</td> <td>9.39</td> <td>3.26</td> <td>-46.04</td> </tr> <tr> <td>Average</td> <td>7.29</td> <td>2.55</td> <td>-66.15</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.53	2.00	-82.71	Maximum	9.39	3.26	-46.04	Average	7.29	2.55	-66.15	Pass/Fail	Pass	Pass	Pass	PCS			
									Peak Phase °	RMS Phase °	Frequency Hz																				
								Minimum	5.53	2.00	-82.71																				
								Maximum	9.39	3.26	-46.04																				
Average	7.29	2.55	-66.15																												
Pass/Fail	Pass	Pass	Pass																												
Traffic Channel																															
1 of 2		50 / 50 Single Active Cell Connected Sys Type: GSM IntRef Offset R T						810																							
								MS TX Level																							
								0																							
								Channel Mode Setup ▾																							
								Return																							
								1 of 2																							

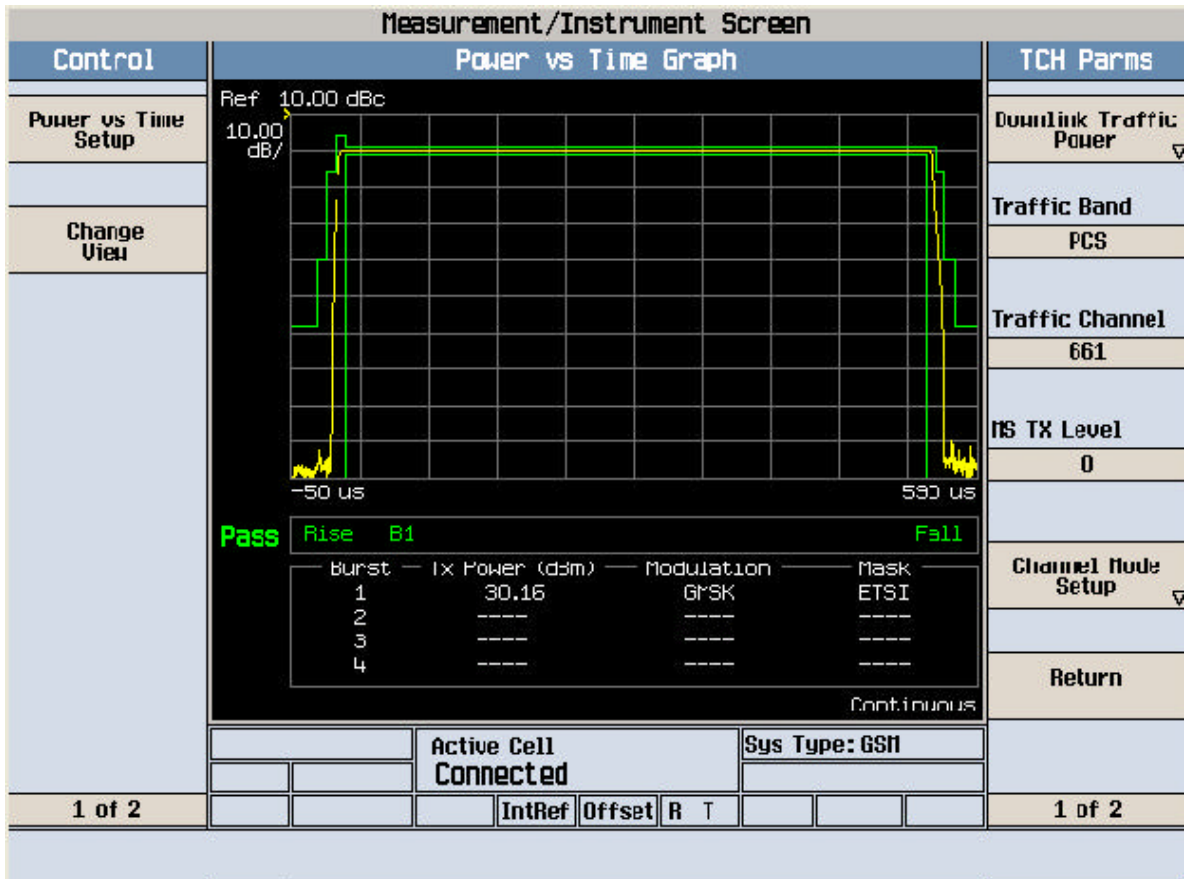
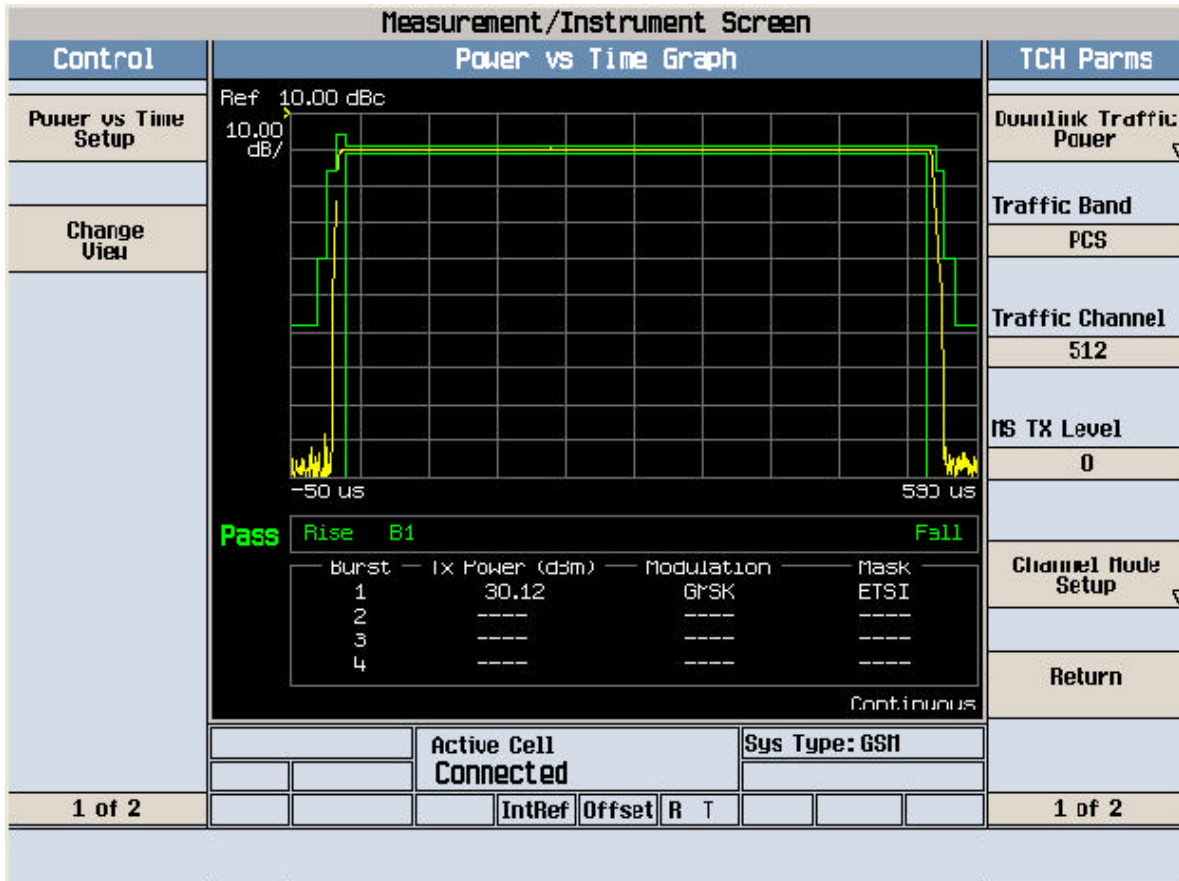


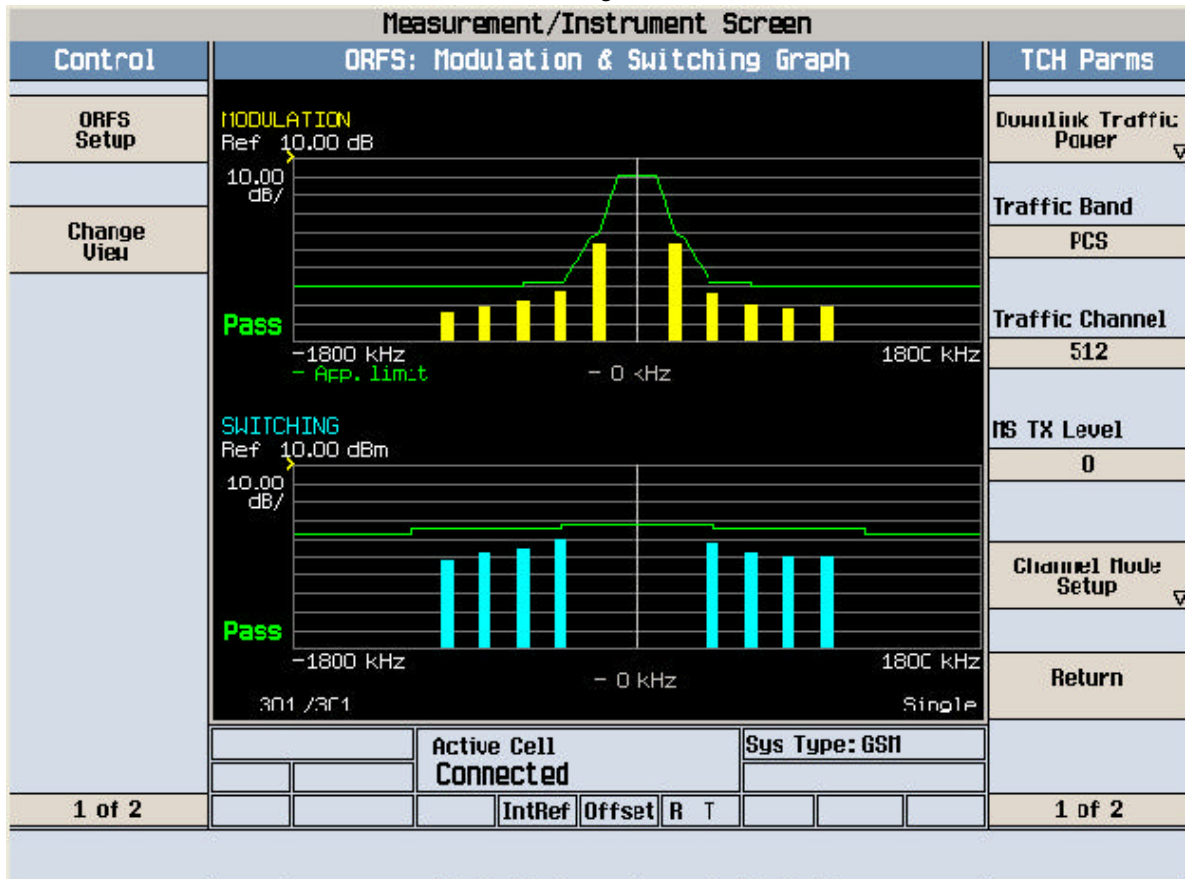
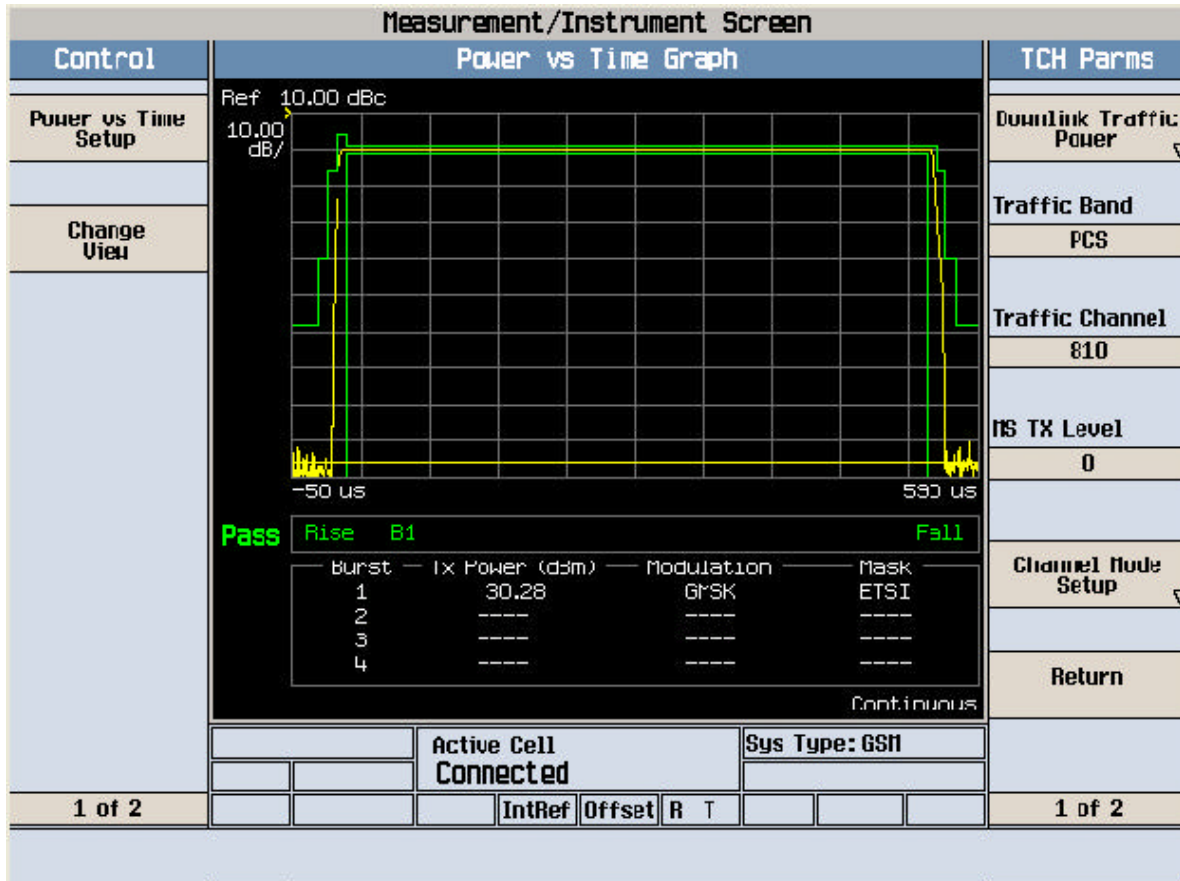


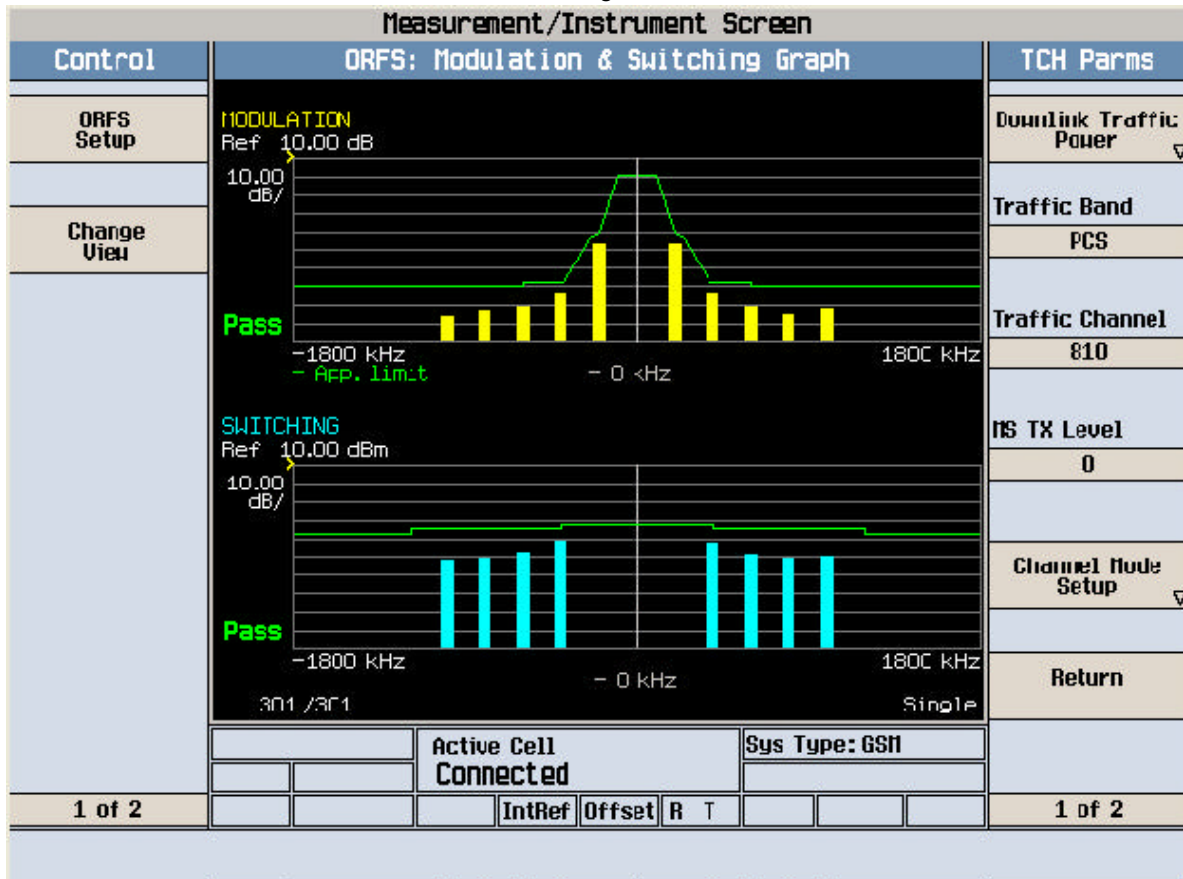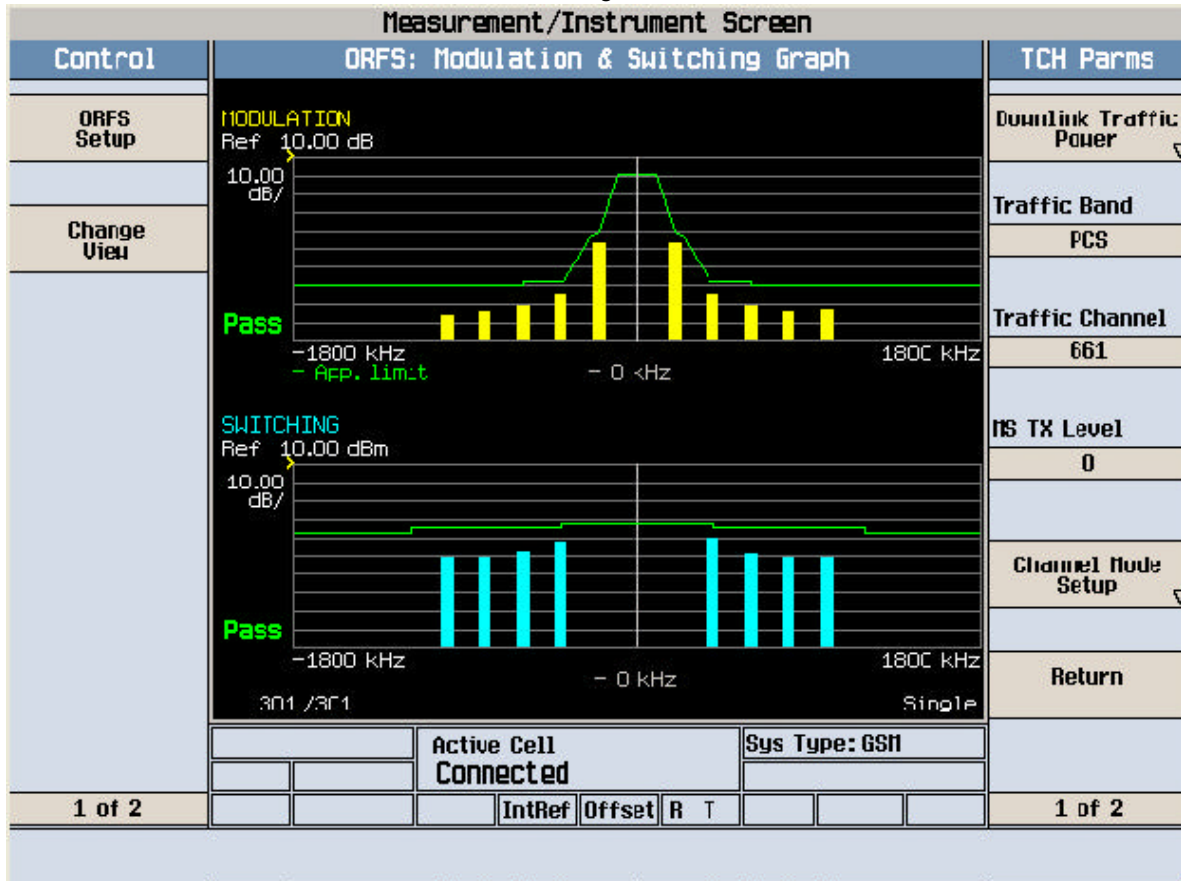

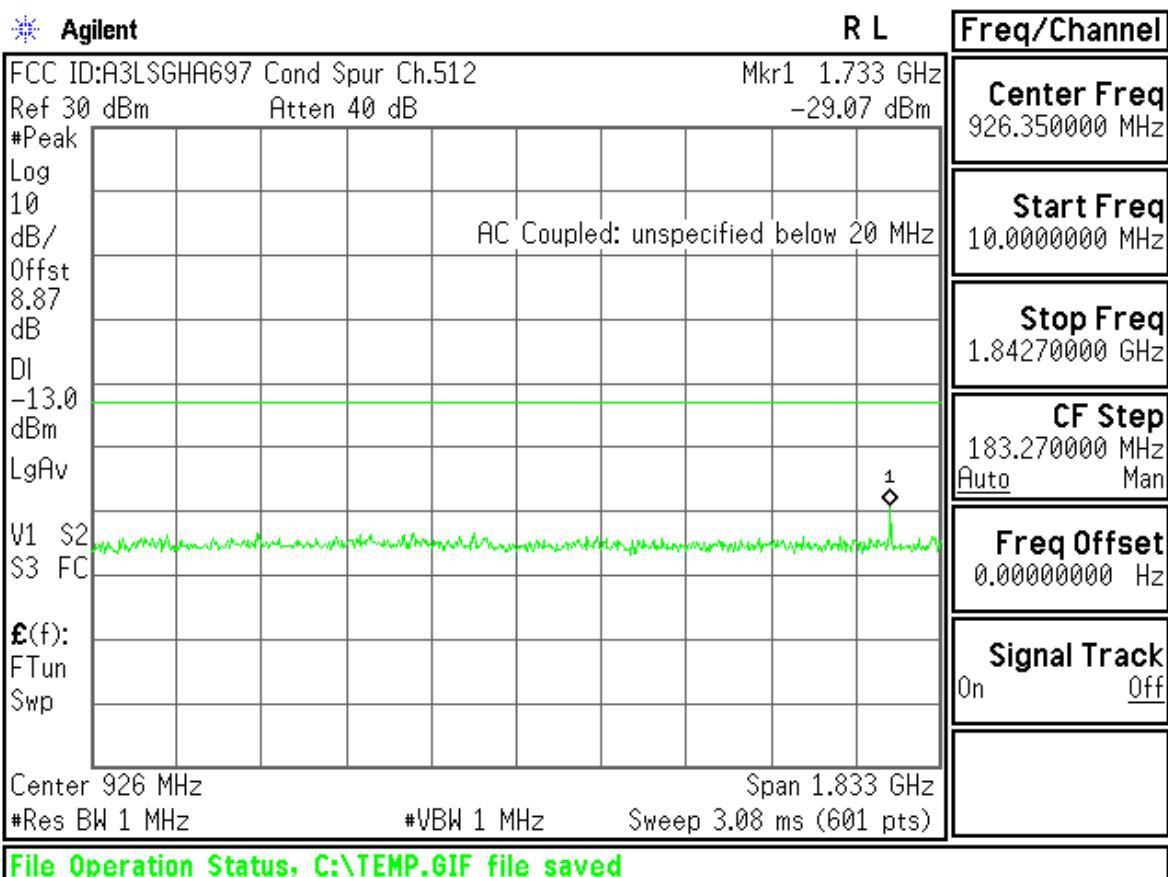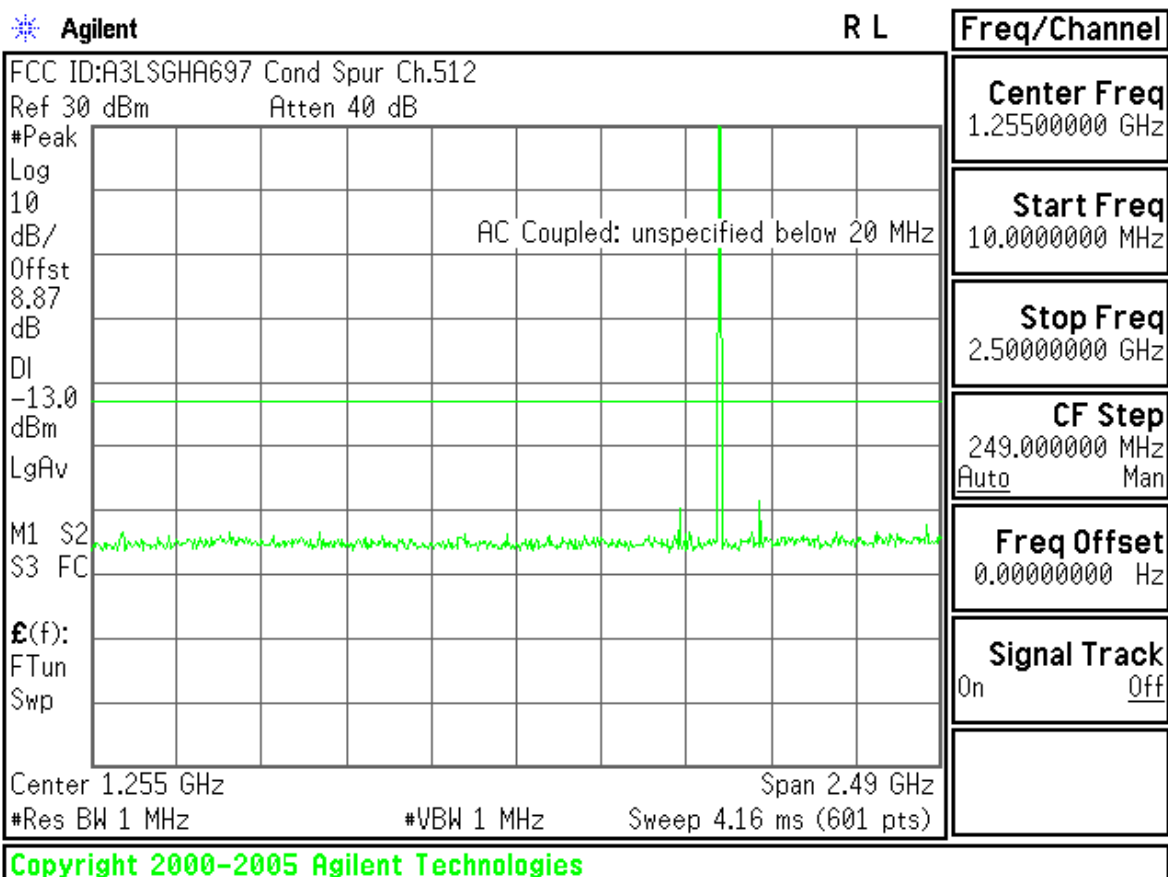

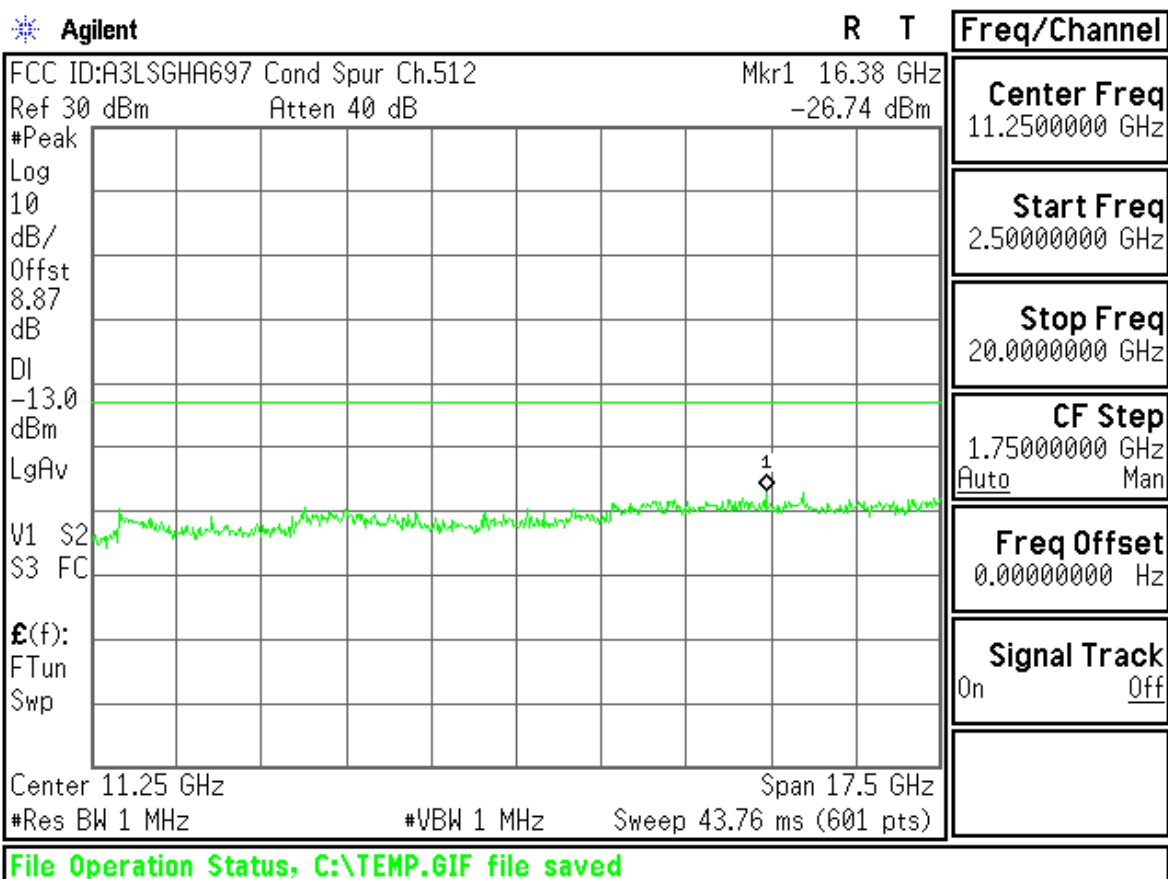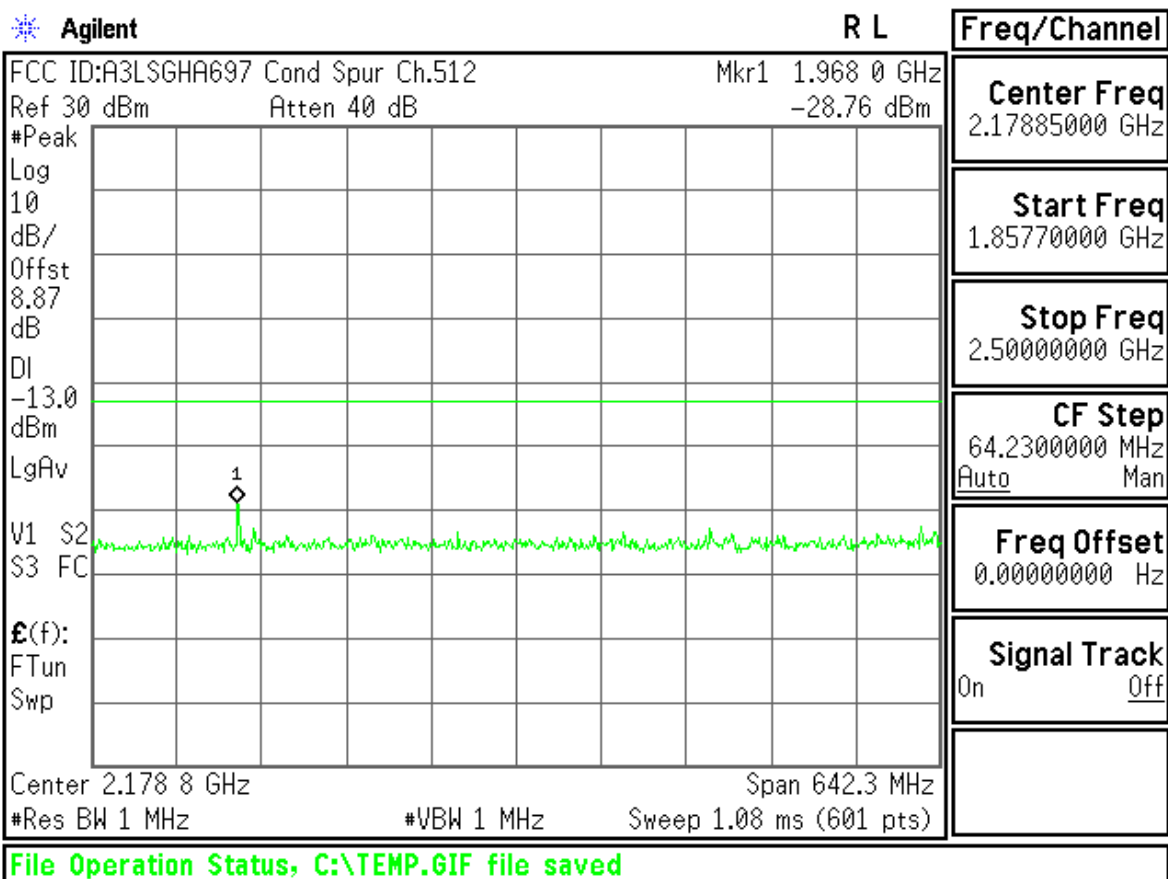

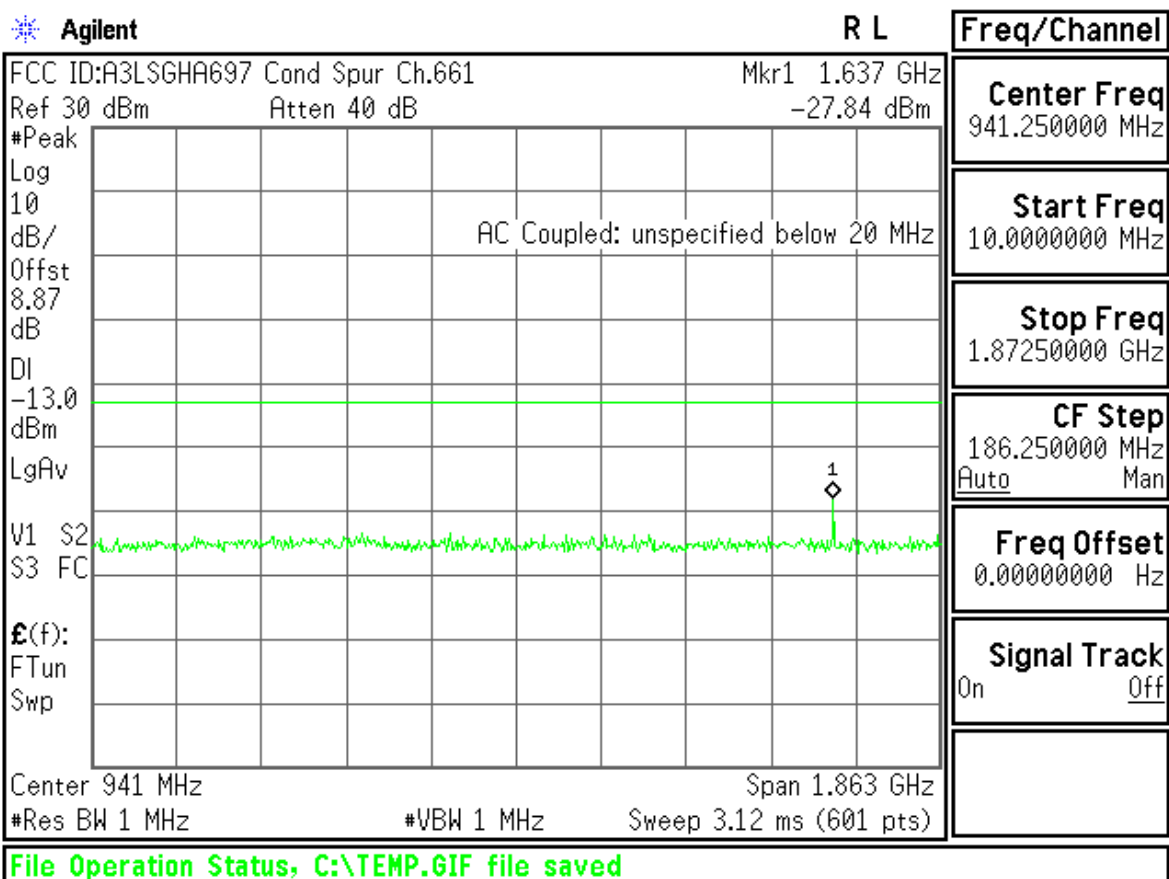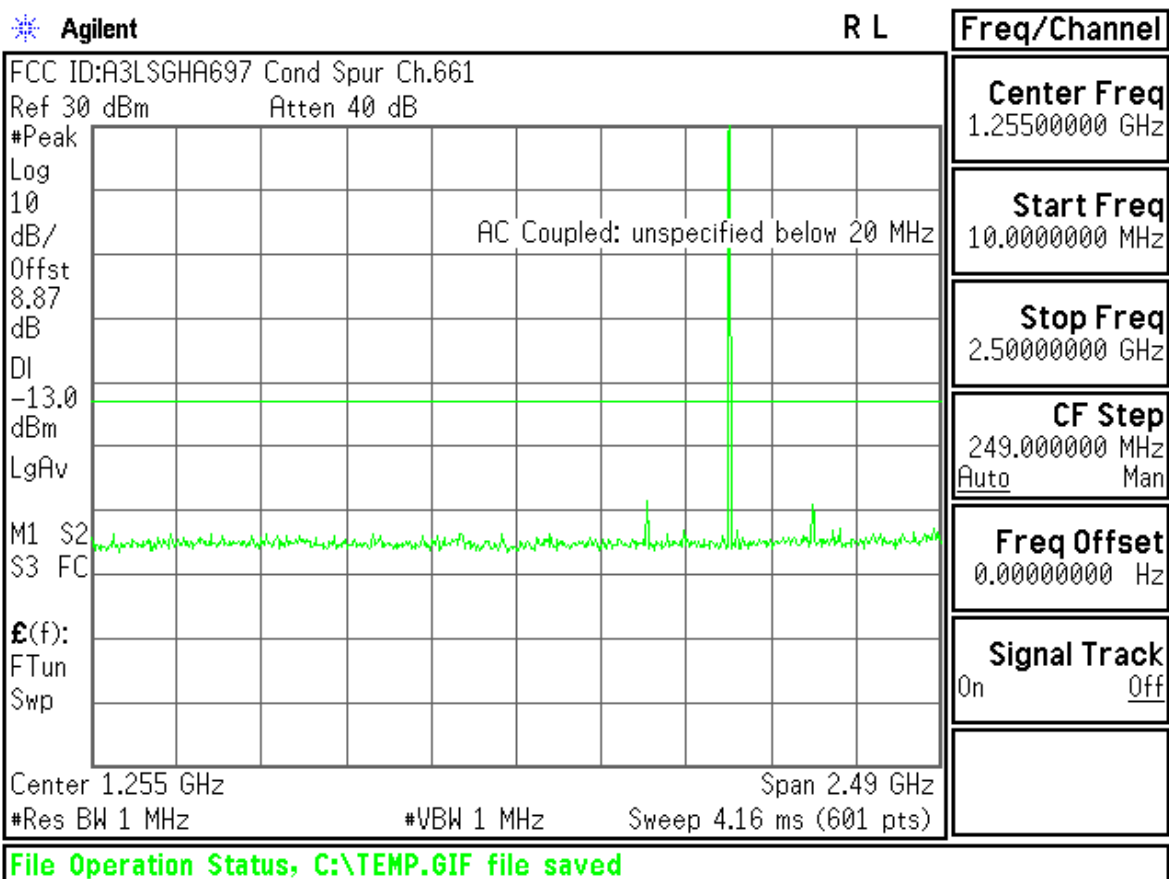

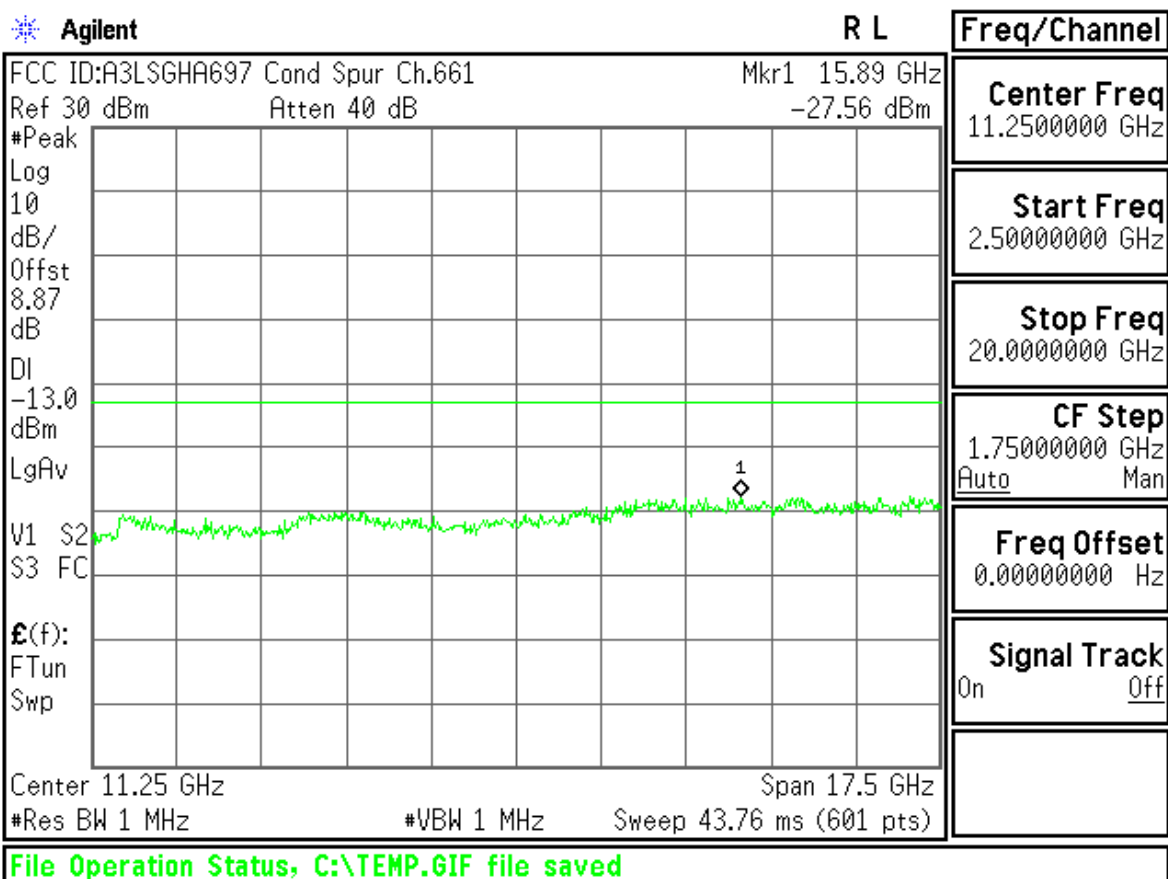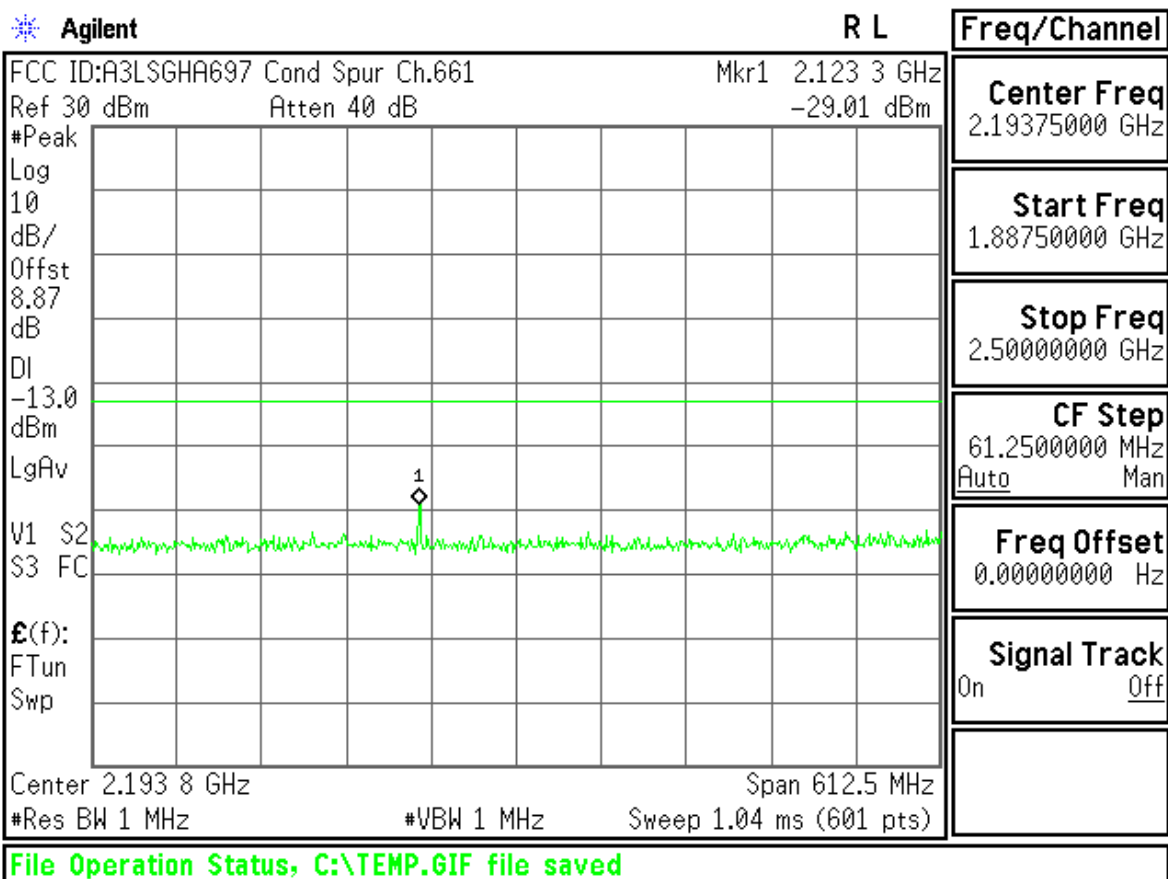

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Cond Spur Ch.810

Mkr1 1.789 GHz

Ref 30 dBm

Atten 40 dB

-29.97 dBm

#Peak

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.16 ms (601 pts)

Center Freq
956.150000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.90230000 GHz

CF Step
189.230000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

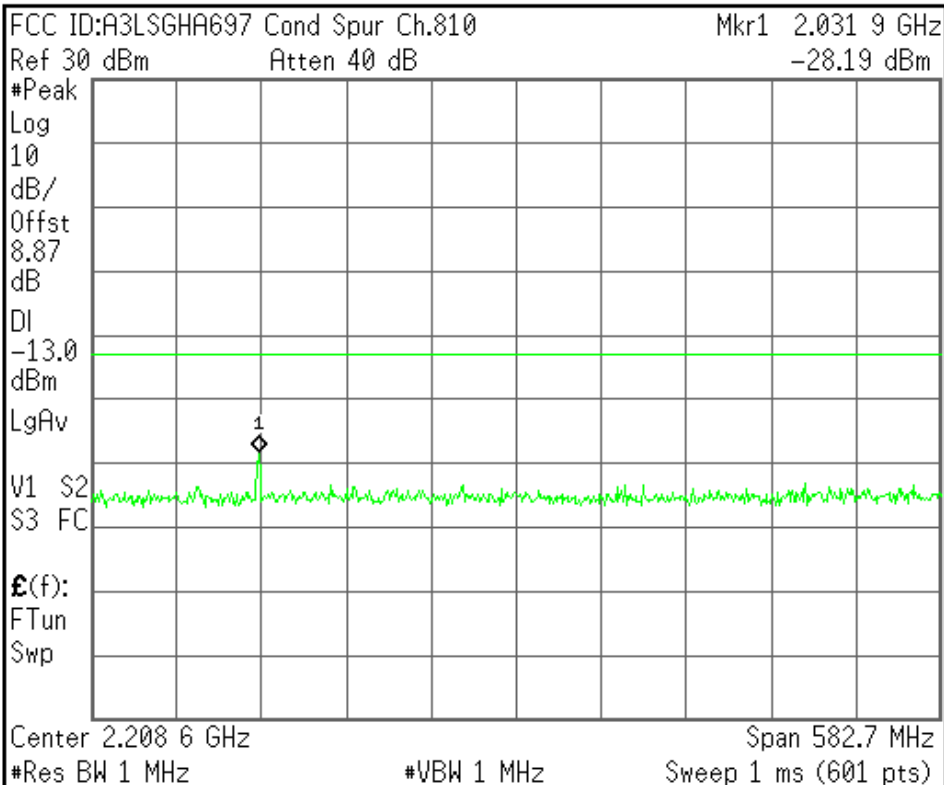

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

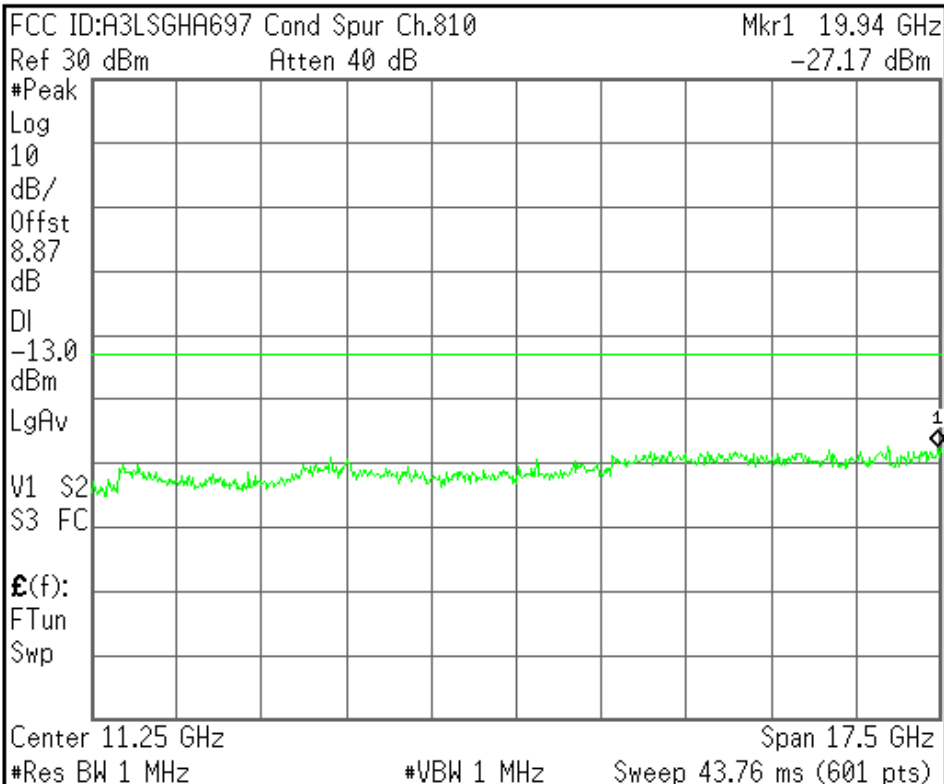

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz



Stop Freq
20.0000000 GHz



CF Step
1.75000000 GHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

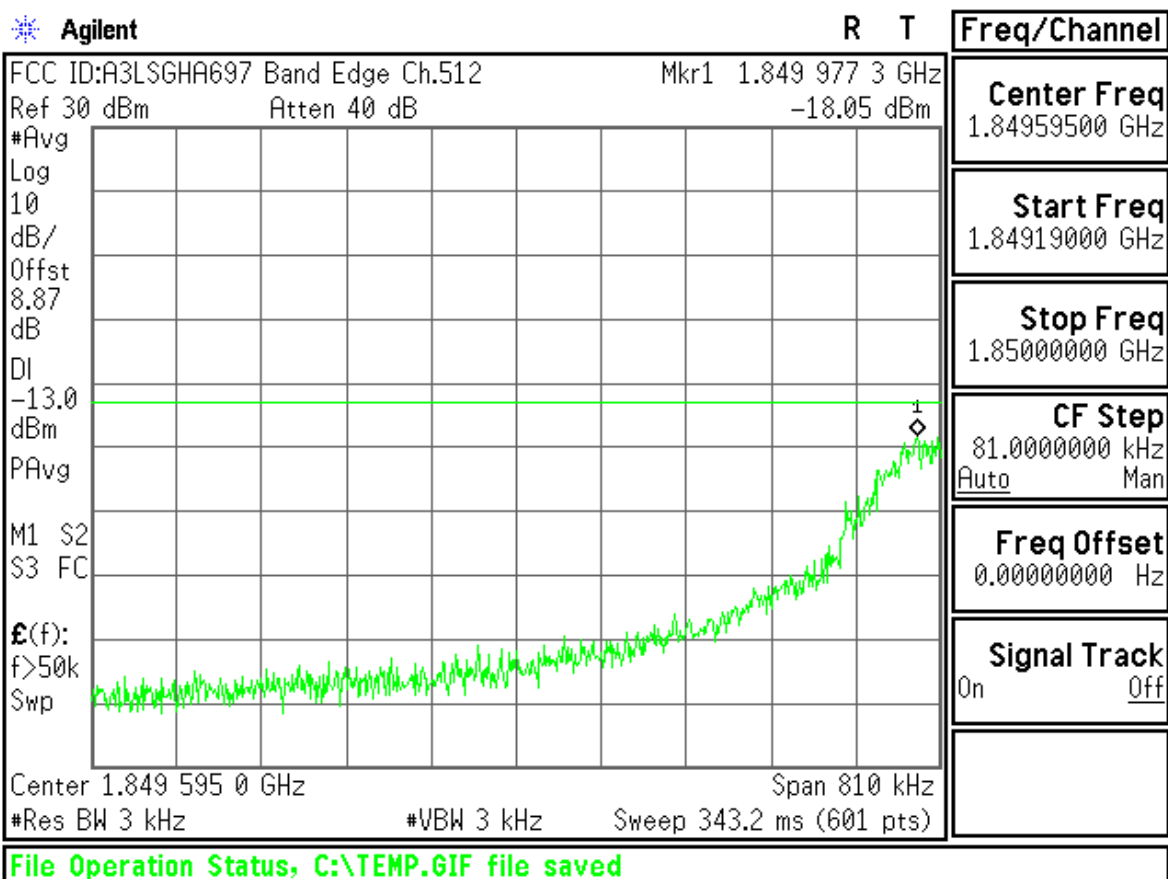
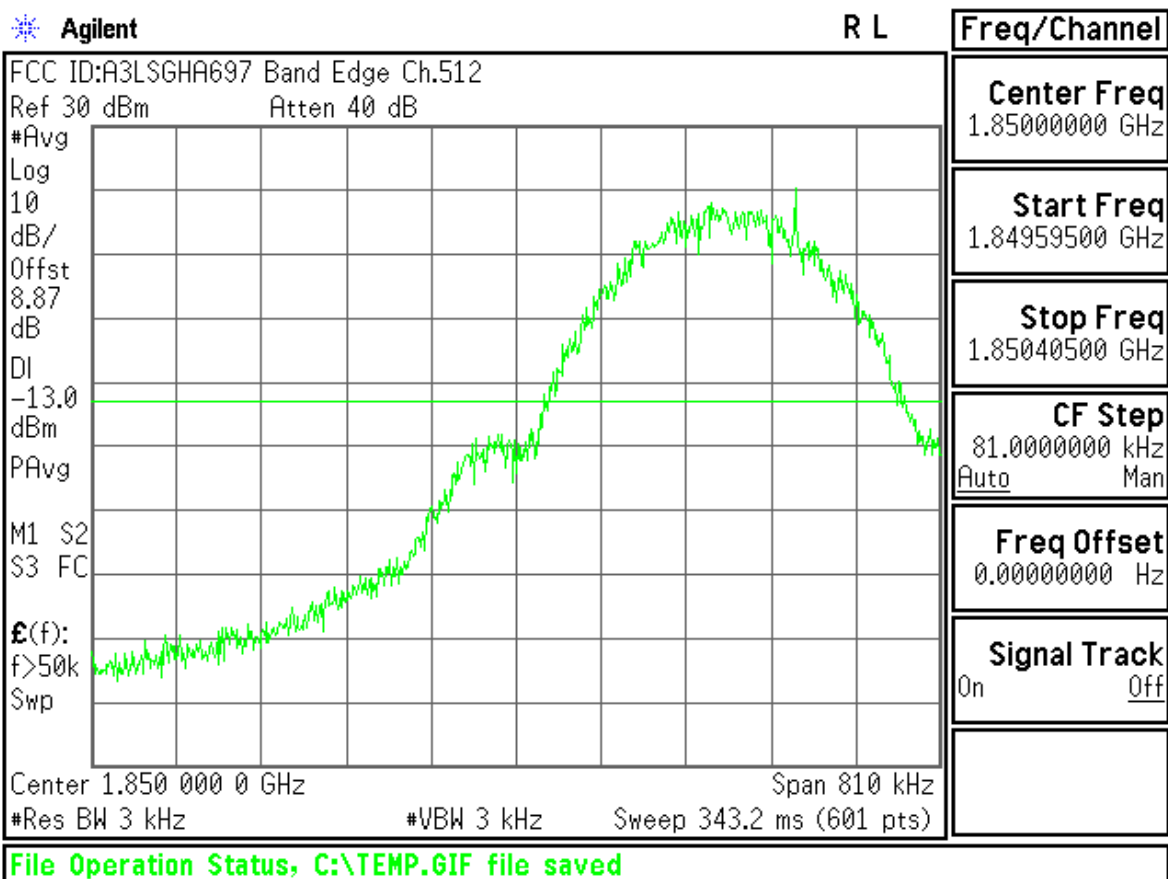


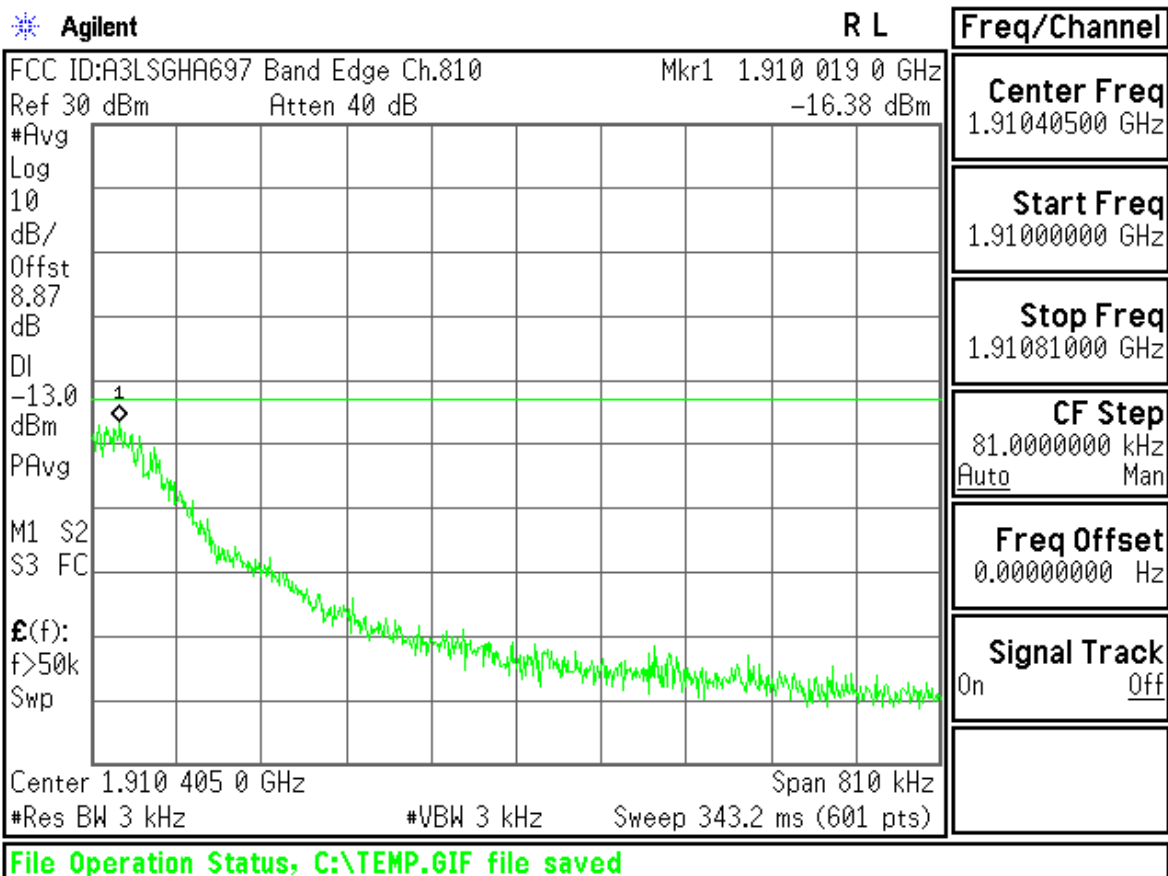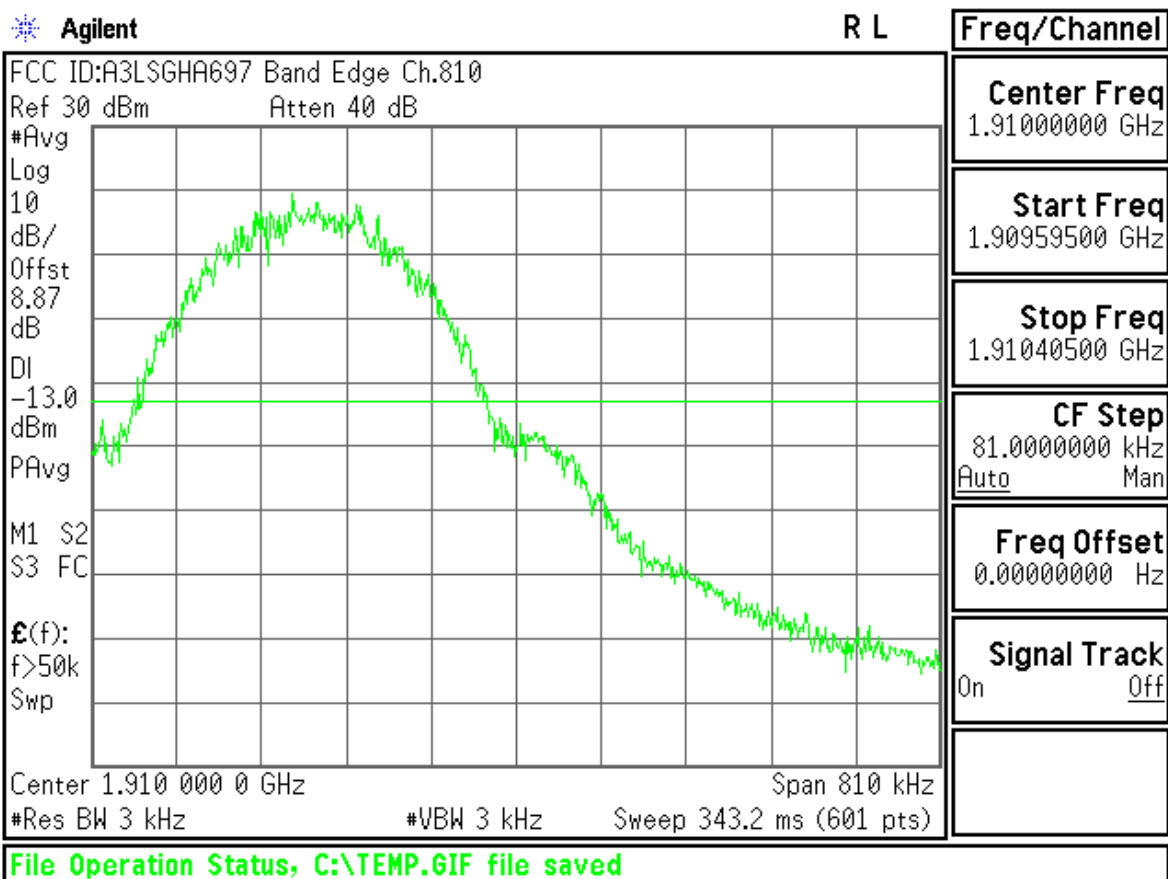


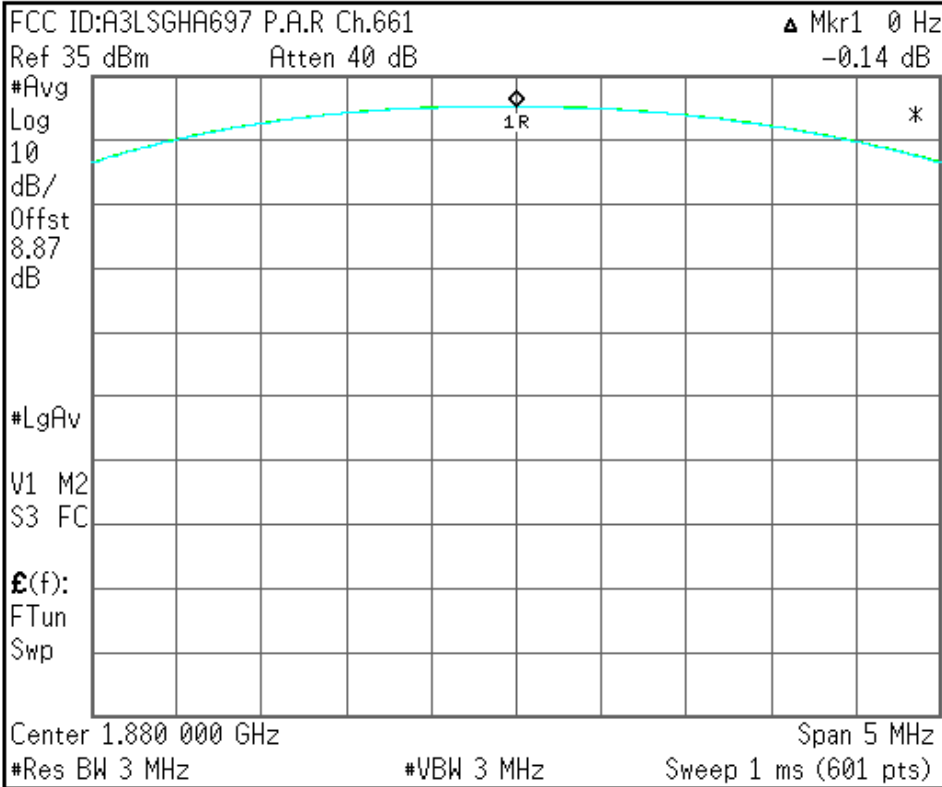

Center Freq 1.88000000 GHz
Start Freq 1.87750000 GHz
Stop Freq 1.88250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

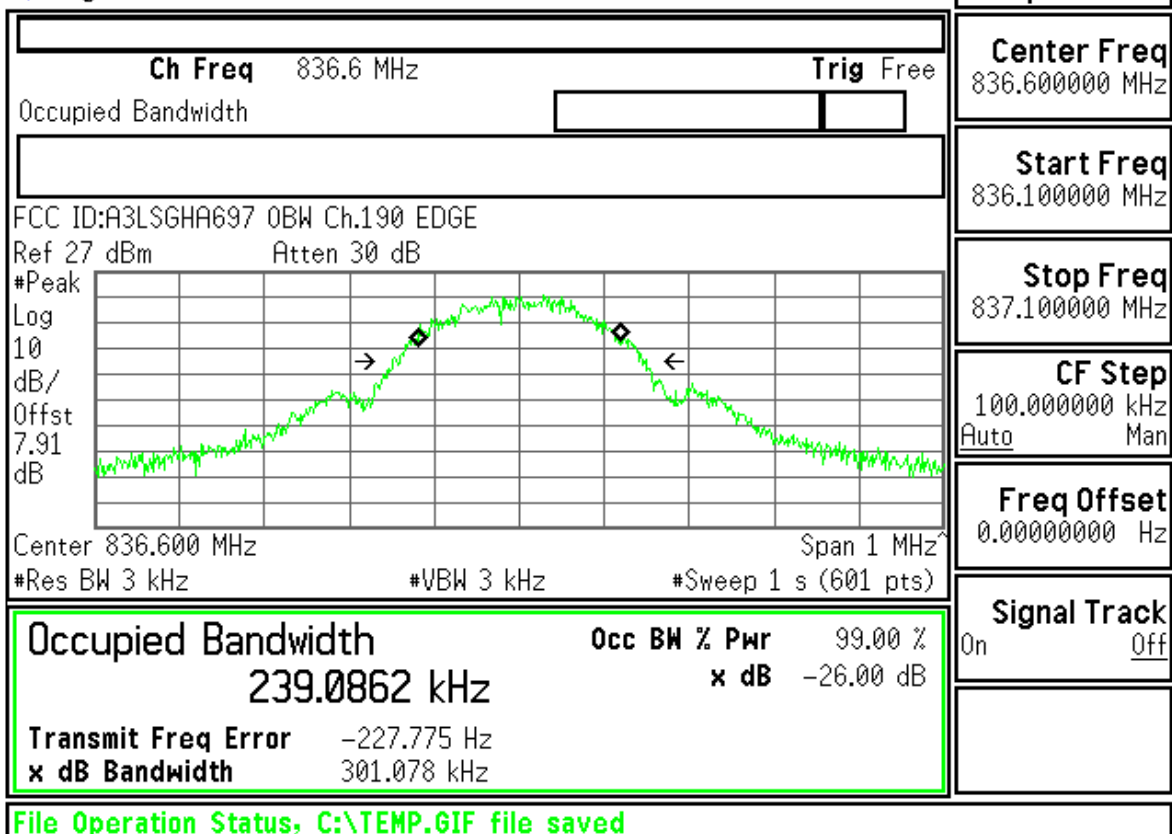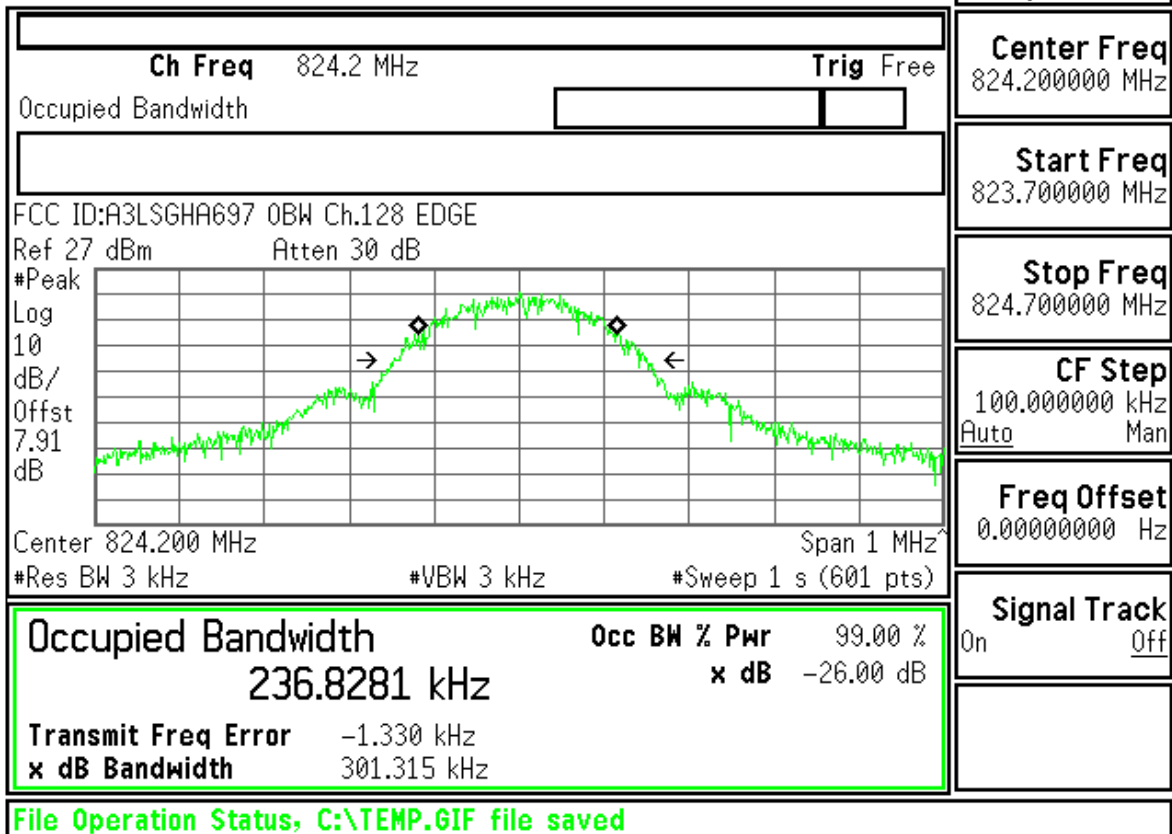

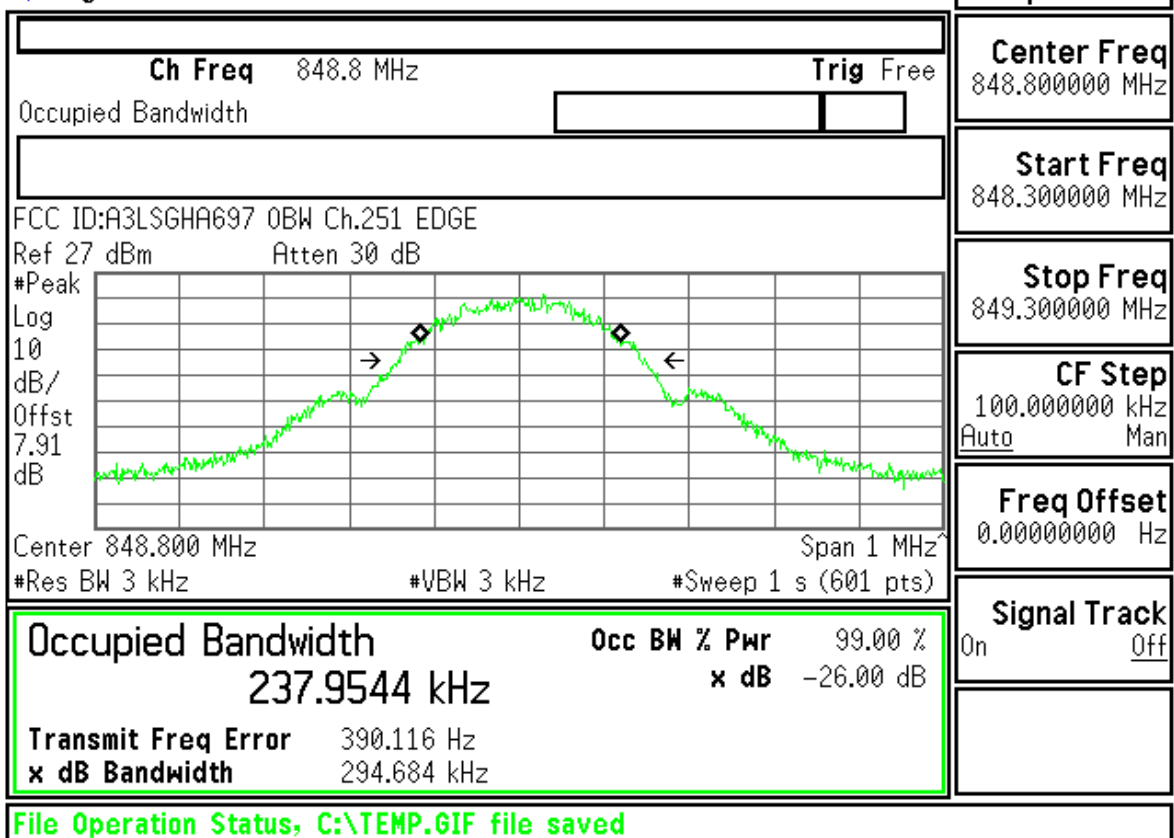

ID : A3LSGHA697 Transmit Power 128CH EDGE

Measurement/Instrument Screen													
Control		EGPRS Transmit Power							PDCH Params				
EGPRS Transmit Power Setup ▾		EPK Burst Power			EPK Est Carrier Power				Downlink Traffic Power ▾				
		Minimum		Maximum		Minimum		Maximum		Traffic Band			
		25.15 dBm		26.36 dBm		25.83 dBm		25.90 dBm		GSN850			
		Average		Std Dev		Average		Std Dev		Traffic Channel			
		25.77 dBm		0.23 dBm		25.87 dBm		0.01 dBm		128			
		200 / 200							Single				
											HS TX Level ▾		
											Modulation Coding Scheme ▾		
											Return		
				Active Cell Transferring				Sys Type: EGPRS					
						IntRef		Offset		R T			
1 of 2												1 of 2	

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.128 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

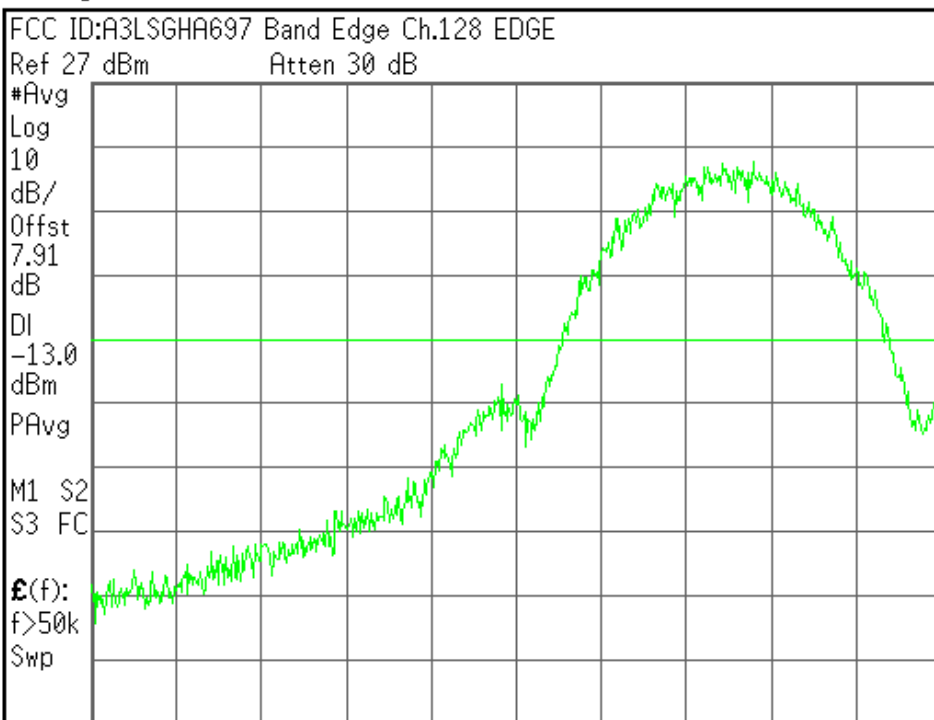

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.128 EDGE

Mkr1 823.978 6 MHz

Ref 27 dBm

Atten 30 dB

-20.23 dBm

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

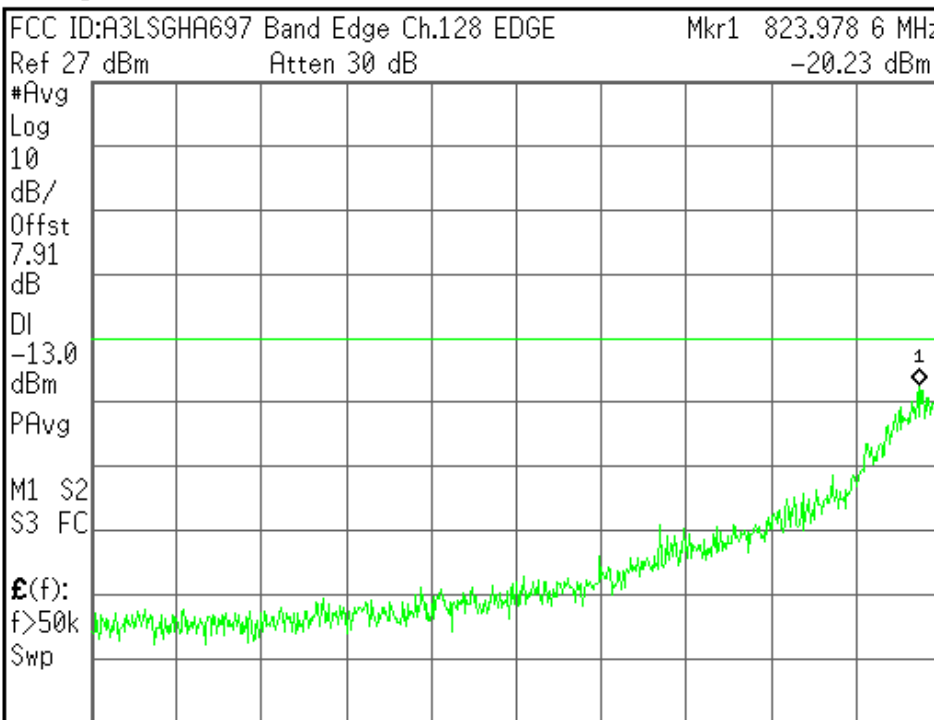

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.251 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

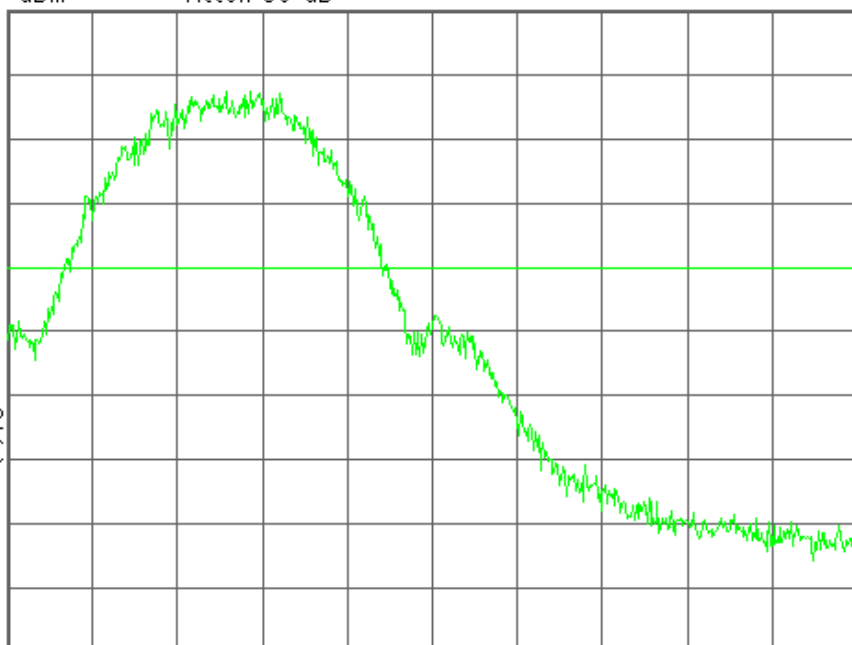

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.251 EDGE

Mkr1 849.001 3 MHz

Ref 27 dBm

Atten 30 dB

-19.70 dBm

#Avg

Log

10

dB/

Offst

7.91

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

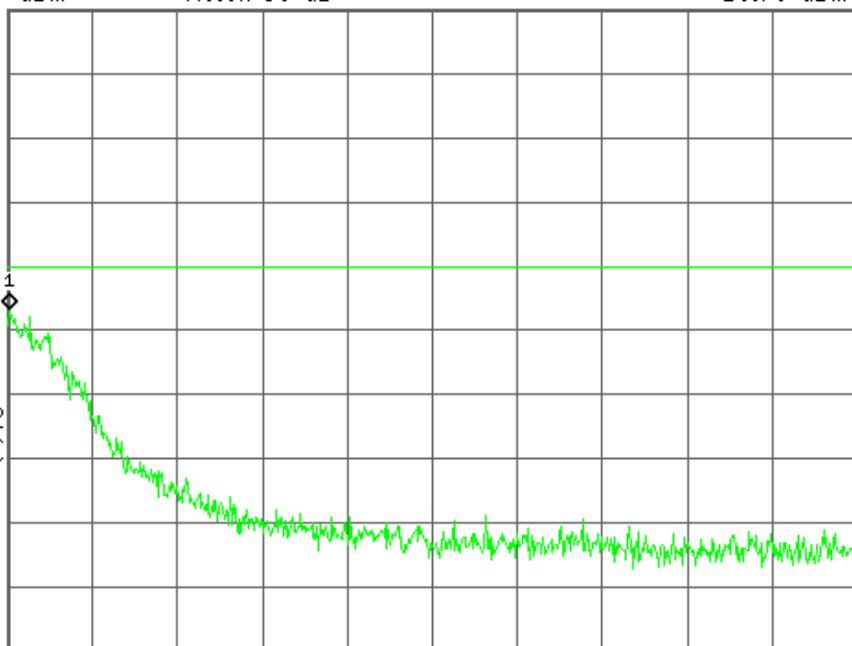

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE1900



Agilent

R T

Freq/Channel

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LSGHA697 0BW Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Peak

Log


10

dB/

Offst

8.87

dB

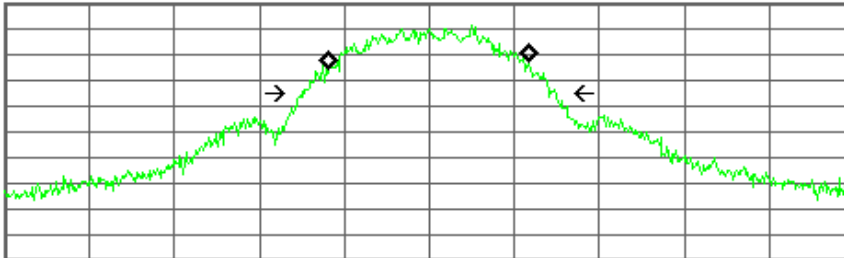

Center 1.850 200 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth

237.7705 kHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error -533.786 Hz

x dB Bandwidth 301.778 kHz

Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LSGHA697 0BW Ch.661 EDGE

Ref 26 dBm

Atten 30 dB

#Peak

Log


10

dB/

Offst

8.87

dB

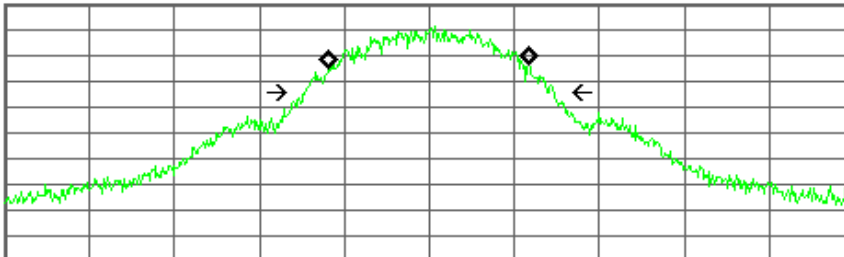

Center 1.880 000 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth

237.5646 kHz

Occ BW % Pwr 99.00 %


x dB -26.00 dB

Transmit Freq Error -554.098 Hz

x dB Bandwidth 296.011 kHz

Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


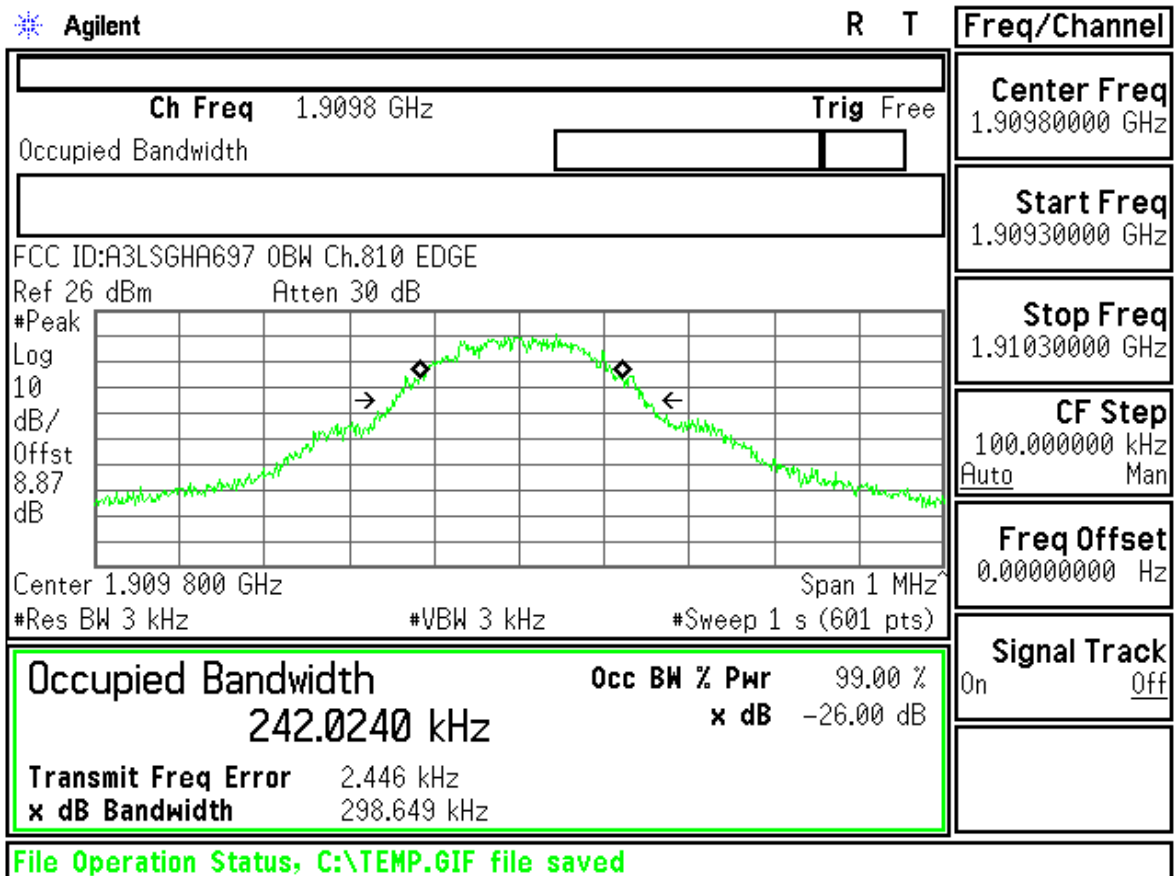


ID : A3LSGHA697 Transmit Power 512CH EDGE

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Params		
EGPRS Transmit Power Setup ▾		EPSSK Burst Power				EPSSK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		24.37 dBm		25.84 dBm		25.26 dBm		25.33 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.24 dBm		0.25 dBm		25.29 dBm		0.01 dBm		512		
		200 /200				Single						
										HS TX Level ▾		
										Modulation Coding Scheme ▾		
										Return		
				Active Cell Transferring				Sys Type: EGPRS				
						IntRef		Offset		R T		
1 of 2												1 of 2

Measurement/Instrument Screen												
Control		EGPRS Transmit Power							PDCH Parms			
EGPRS Transmit Power Setup ▾		EPSK Burst Power			EPSK Est Carrier Power				Downlink Traffic Power ▾			
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		24.70 dBm		25.98 dBm		25.37 dBm		25.45 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.35 dBm		0.25 dBm		25.41 dBm		0.01 dBm		661		
		200 / 200						Single				
											HS TX Level ▾	
											Modulation Coding Scheme ▾	
											Return	
				Active Cell Transferring				Sys Type: EGPRS				
1 of 2						IntRef		Offset		R T		
										1 of 2		

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Parms		
EGPRS Transmit Power Setup ▾		EPSK Burst Power				EPSK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		24.72 dBm		25.95 dBm		25.38 dBm		25.46 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.35 dBm		0.24 dBm		25.41 dBm		0.01 dBm		810		
		200 / 200								Single		
				Active Cell Transferring				Sys Type: EGPRS				
1 of 2						IntRef		Offset		R T		1 of 2

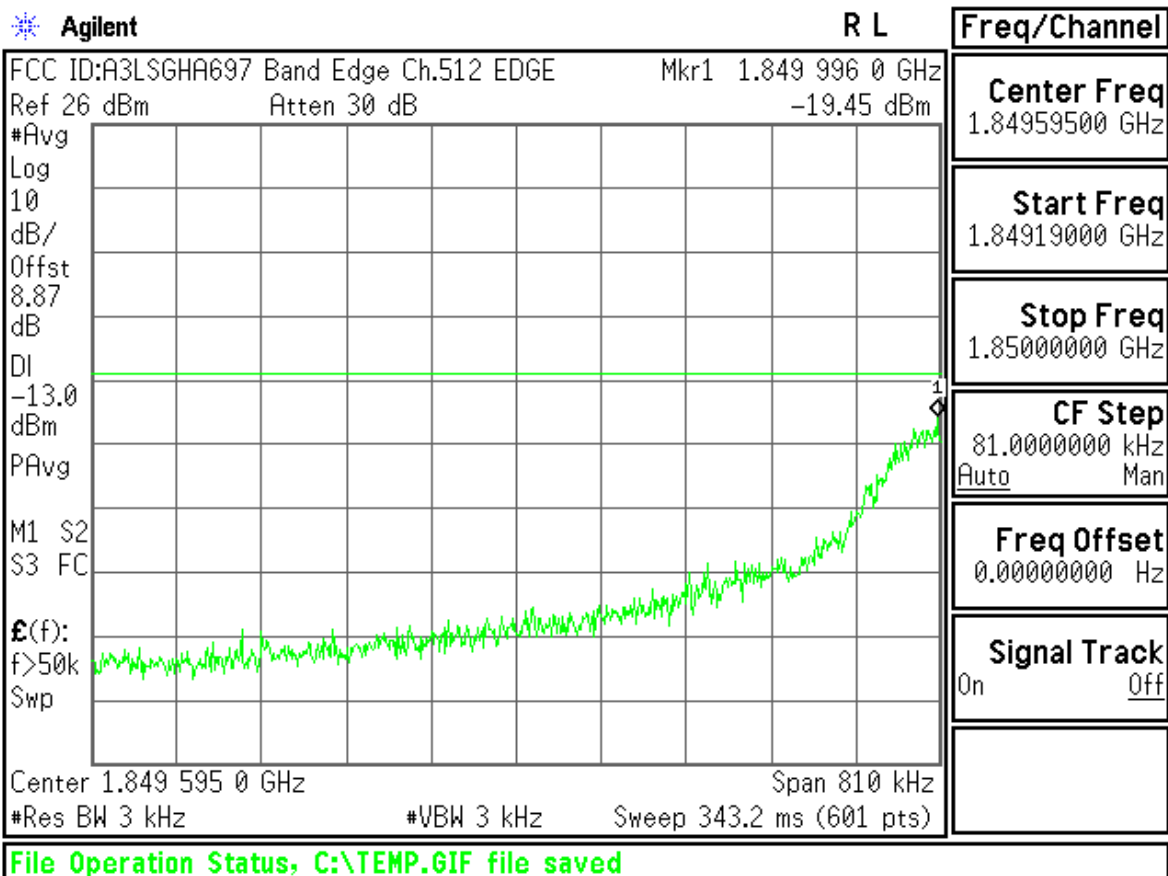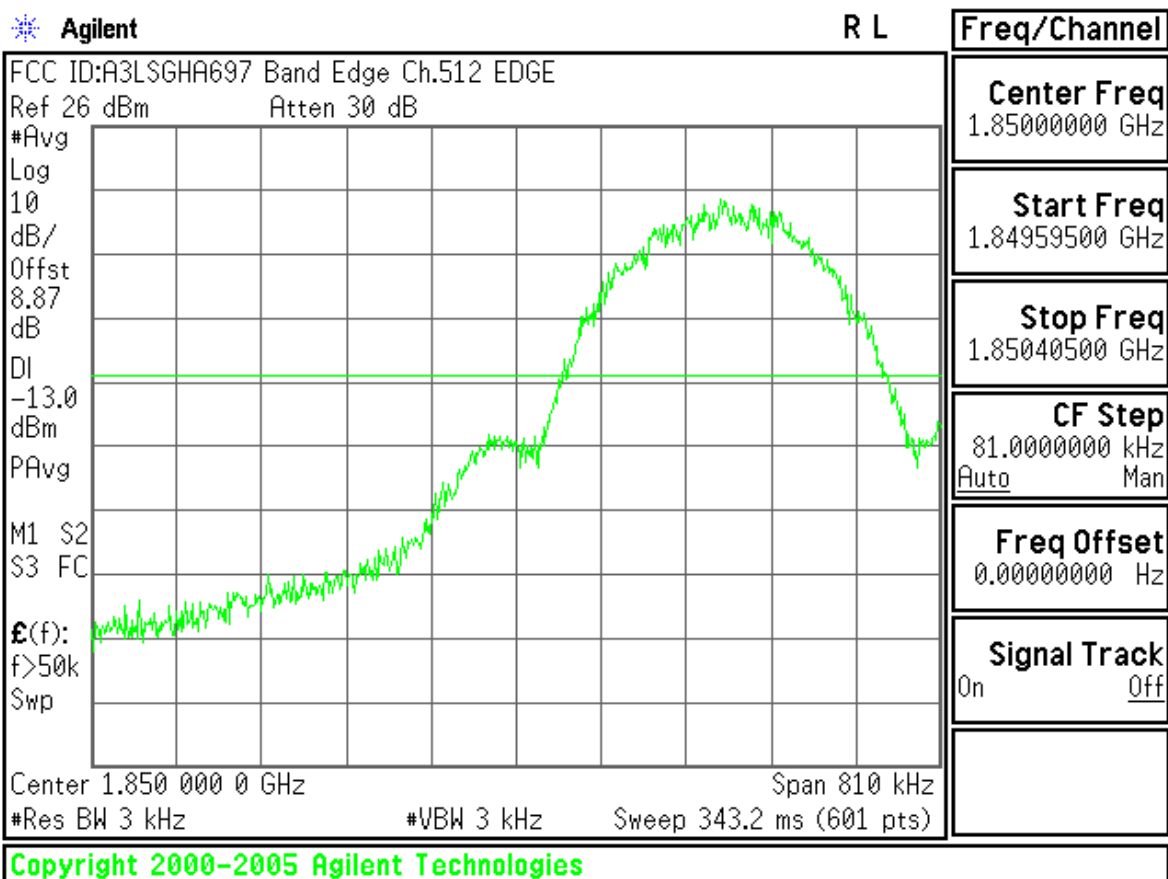

Agilent

R L

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.810 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

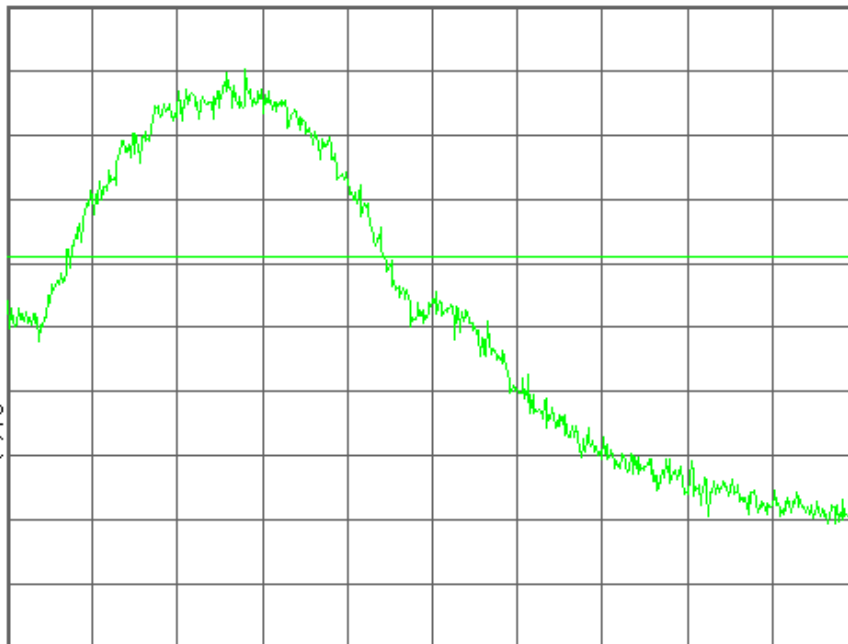

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA697 Band Edge Ch.810 EDGE

Mkr1 1.910 006 5 GHz

Ref 26 dBm

Atten 30 dB

-18.08 dBm

#Avg

Log

10

dB/

Offst

8.87

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

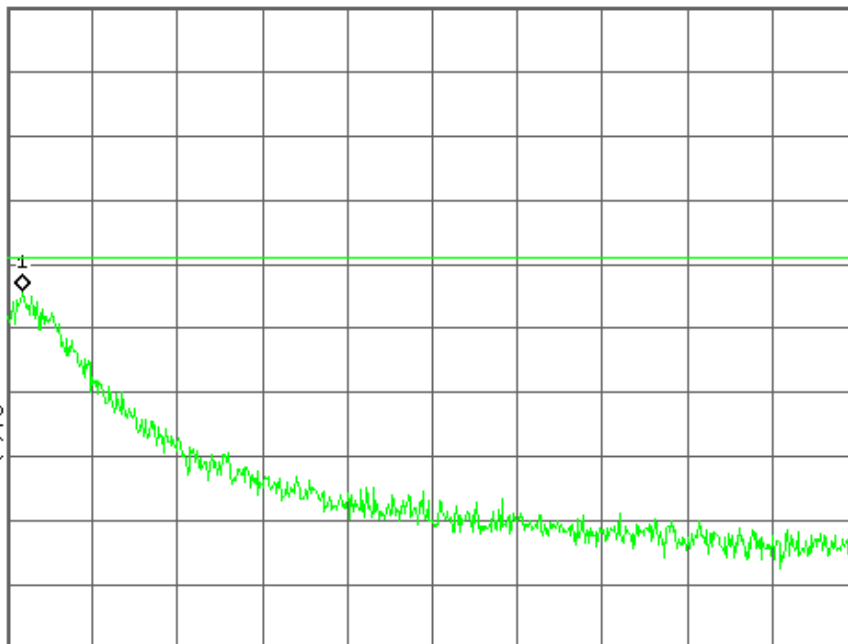

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz


Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

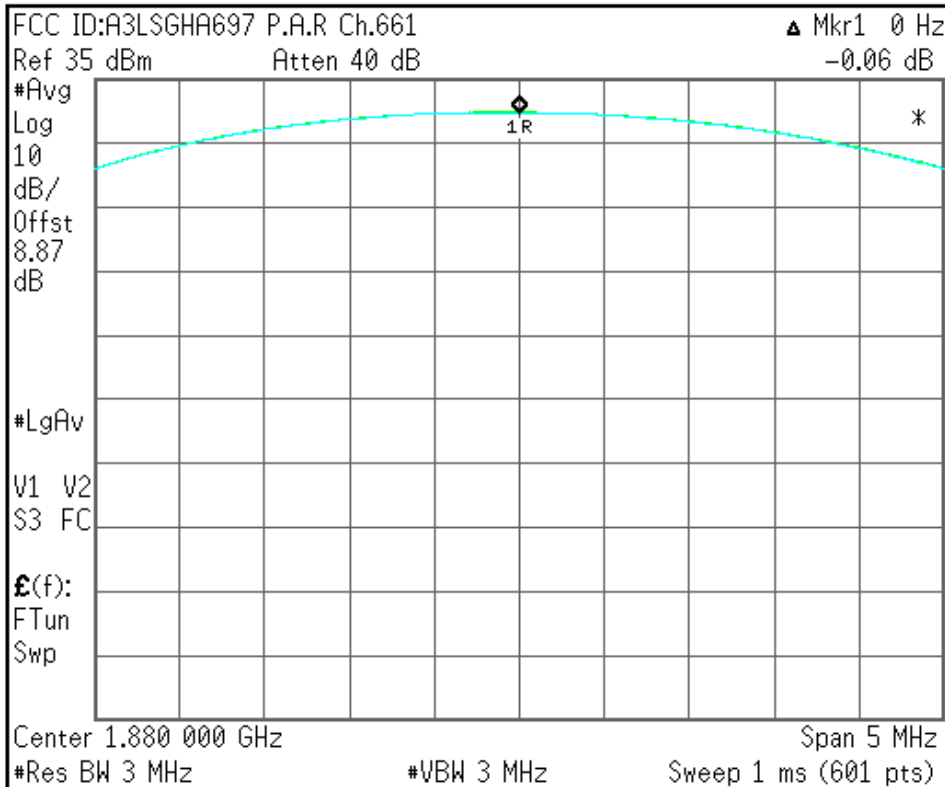

Center Freq
 1.88000000 GHz

Start Freq
 1.87750000 GHz

Stop Freq
 1.88250000 GHz

CF Step
 500.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2005 Agilent Technologies