



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested : **SGH-F480T**
FCC ID(Requested) : **A3LSGHF480T**
Report No : **FF-166-R1**
Job No : **FF-166**
Date issued : **August 20, 2008**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part24.

Prepared By

JH WOO - Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)	14
6.2. GSM1900 Radiated Spurious & Harmonic measurement	15
6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table	16
6.4. Frequency Stability	17
6.4.1. GSM1900 Frequency Stability Table	17
6.4.2. GSM1900 Frequency Stability Graph	18
7. CONCLUSION	20
8. TEST PLOTS	21



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHF480T
- Quantity : Quantity production is planned
- Emission Designators : 248KGXW(GSM1900), 245KG7W(GSM1900 EDGE)
- Tx Freq. Range : 1850.2MHz -1909.8MHz (GSM1900)
- Rx Freq. Range : 1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 1.180 W EIRP GSM1900 (30.72dBm)
0.621 W EIRP GSM1900 EDGE(27.93dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : WCDMA850/HSDPA and GSM1900/EDGE Phone with
Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §2.
- Dates of Test : August 11-12, 2008
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FF-166-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2008-10-17
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000233	2009-07-24
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2009-06-20
Power Sensor	8485A	3318A19924	2008-10-01
Power Meter	E4419B	GB41293846	2008-09-06
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	GB42230535	2009-01-02
	8960	MY47510060	2009-03-03
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
Dipole Antenna	UHA-9105	9105-2412	2009-11-07
Communication test set	CMU200	109162	2008-10-17
Receive Antenna	HL040	353255/019	2008-09-20
Power Supply	E3640A	MY40003594	2009-06-20
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2008-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

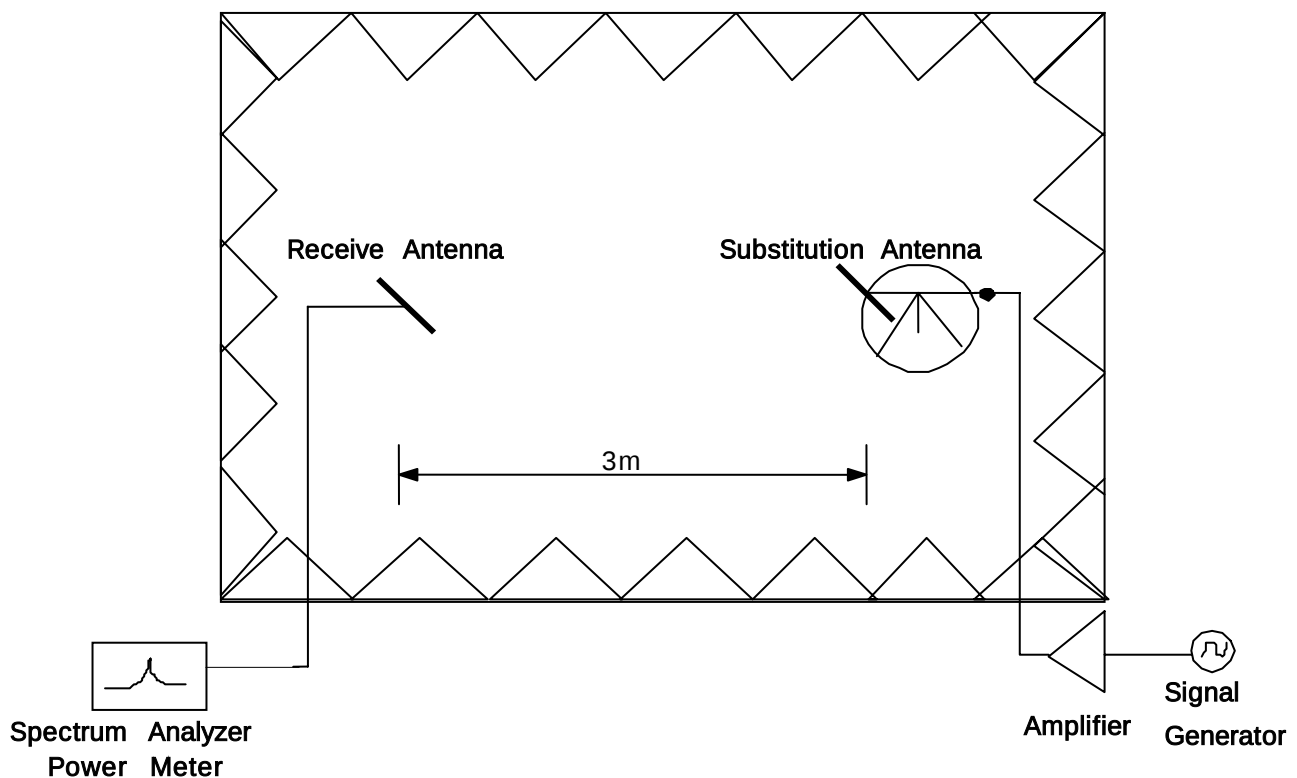


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

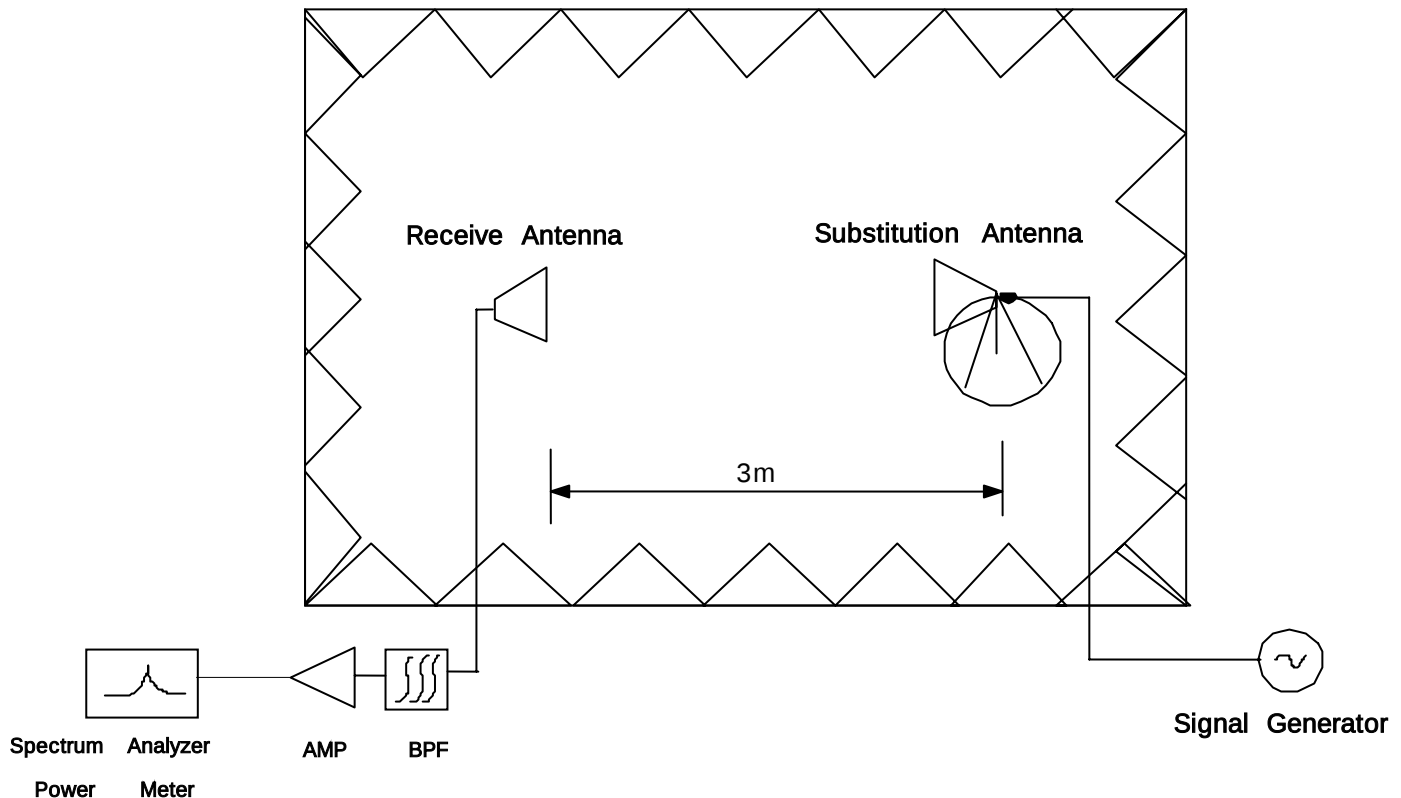


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3.Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (1.180 \text{ W}) = 43.72 \text{ dB}$$

$$30.72 \text{ dBm} - 43.72 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.71	9.70	-19.40
		V	-9.73	9.70	-19.42
1880.00	29.00	H	-9.85	9.70	-19.55
		V	-9.83	9.70	-19.53
1909.80	31.00	H	-8.41	9.70	-18.11
		V	-8.08	9.70	-17.78

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.79	V	328/80	28.63	0.729	Standard
1880.00	-19.07	V	334/90	29.46	0.883	Standard
1909.80	-18.06	V	279/90	30.72	1.180	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1909.80	-20.85	V	280/92	27.93	0.621	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 30.72 dBm = 1.180 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 43.72$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
512	2	3700.40	-66.14	73.22	V
	3	5550.60	-66.43	68.78	H
	4	7400.80	-63.75	61.53	H
	5	9251.00	-55.49	49.64	V
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-67.20	73.42	H
	3	5640.00	-66.97	69.23	H
	4	7520.00	-61.50	59.68	H
	5	9400.00	-57.24	49.76	H
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-67.14	72.95	V
	3	5729.40	-65.22	67.04	V
	4	7639.20	-61.61	58.85	V
	5	9549.00	-54.66	48.04	V
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2008.08.12

Test Engineer : JH WOO

Tx Cable loss
Tx Horn Ant Gain
Tx Level to radiate -13dBm
ESI Level received from Tx with -13dBm
Tested Level from EUT
= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-13.91	12.40	-11.50	-36.82	-36.64	-67.43	-66.14	74.33	73.22
	3	5550.60	-18.04	12.90	-7.90	-41.37	-41.37	-66.43	-66.61	68.78	68.96
	4	7400.80	-20.27	10.50	-3.20	-45.94	-45.35	-63.75	-64.08	61.53	62.45
	5	9251.00	-23.06	11.20	-1.10	-51.85	-49.57	-58.30	-55.49	50.17	49.64
	6	11101.20	-25.92	11.60	1.30	-54.92	-54.59	-	-	-	-
	7	12951.40	-28.16	12.90	2.30	-56.76	-56.49	-	-	-	-
661	2	3760.00	-14.05	12.40	-11.40	-37.50	-36.99	-67.20	-67.75	73.42	74.48
	3	5640.00	-18.03	12.90	-7.90	-41.30	-41.76	-66.97	-67.27	69.39	69.23
	4	7520.00	-20.41	10.60	-3.20	-45.54	-45.69	-61.50	-63.74	59.68	61.77
	5	9400.00	-22.44	11.60	-2.20	-51.20	-50.63	-57.24	-57.43	49.76	50.52
	6	11280.00	-26.22	12.10	1.10	-54.35	-54.25	-	-	-	-
	7	13160.00	-27.70	12.80	1.90	-57.39	-57.52	-	-	-	-
810	2	3819.60	-14.59	12.40	-10.80	-37.15	-37.91	-67.77	-67.14	74.34	72.95
	3	5729.40	-18.34	13.00	-7.70	-41.97	-41.90	-67.70	-65.22	69.45	67.04
	4	7639.20	-20.39	11.20	-3.80	-46.12	-46.48	-62.86	-61.61	60.46	58.85
	5	9549.00	-23.07	11.70	-1.60	-50.91	-50.34	-58.27	-54.66	51.08	48.04
	6	11458.80	-26.21	11.70	1.50	-54.31	-54.64	-	-	-	-
	7	13368.60	-27.83	12.30	2.50	-58.60	-58.83	-	-	-	-

6.4. Frequency Stability

6.4.1. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	25.00	1,880,000,025	0.000001	0.013
100%		-30	33.22	1,880,000,033	0.000002	0.018
100%		-20	17.23	1,880,000,017	0.000001	0.009
100%		-10	-23.27	1,879,999,977	-0.000001	-0.012
100%		0	-15.89	1,879,999,984	-0.000001	-0.008
100%		+10	23.61	1,880,000,024	0.000001	0.013
100%		+20	25.00	1,880,000,025	0.000001	0.013
100%		+30	-24.63	1,879,999,975	-0.000001	-0.013
100%		+40	-26.92	1,879,999,973	-0.000001	-0.014
100%		+50	27.13	1,880,000,027	0.000001	0.014
100%		+60	-15.49	1,879,999,985	-0.000001	-0.008
85%	3.35	+20	-18.59	1,879,999,981	-0.000001	-0.010
115%	4.26	+20	29.22	1,880,000,029	0.000002	0.016
Batt.Endpoint	3.35	+20	-18.59	1,879,999,981	-0.000001	-0.010


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.4.2. GSM1900 Frequency Stability Graph

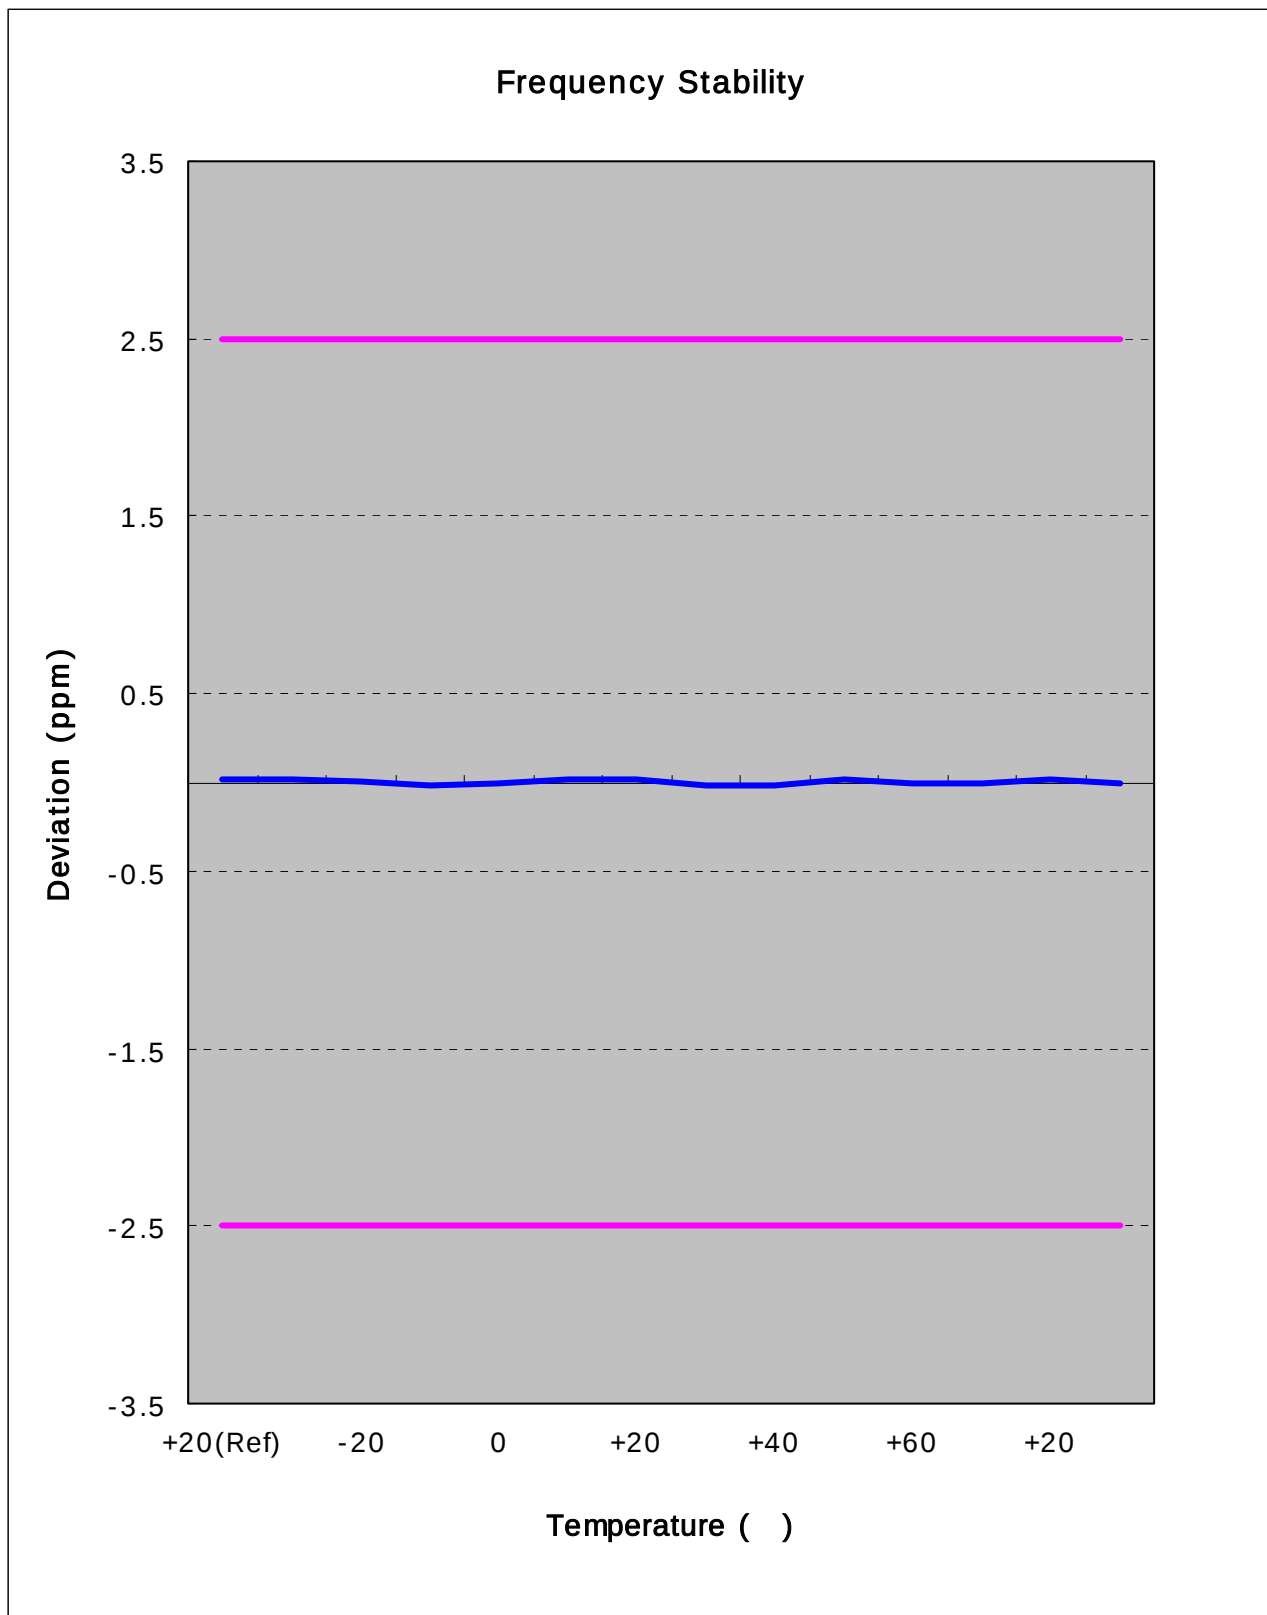

Zoom IN

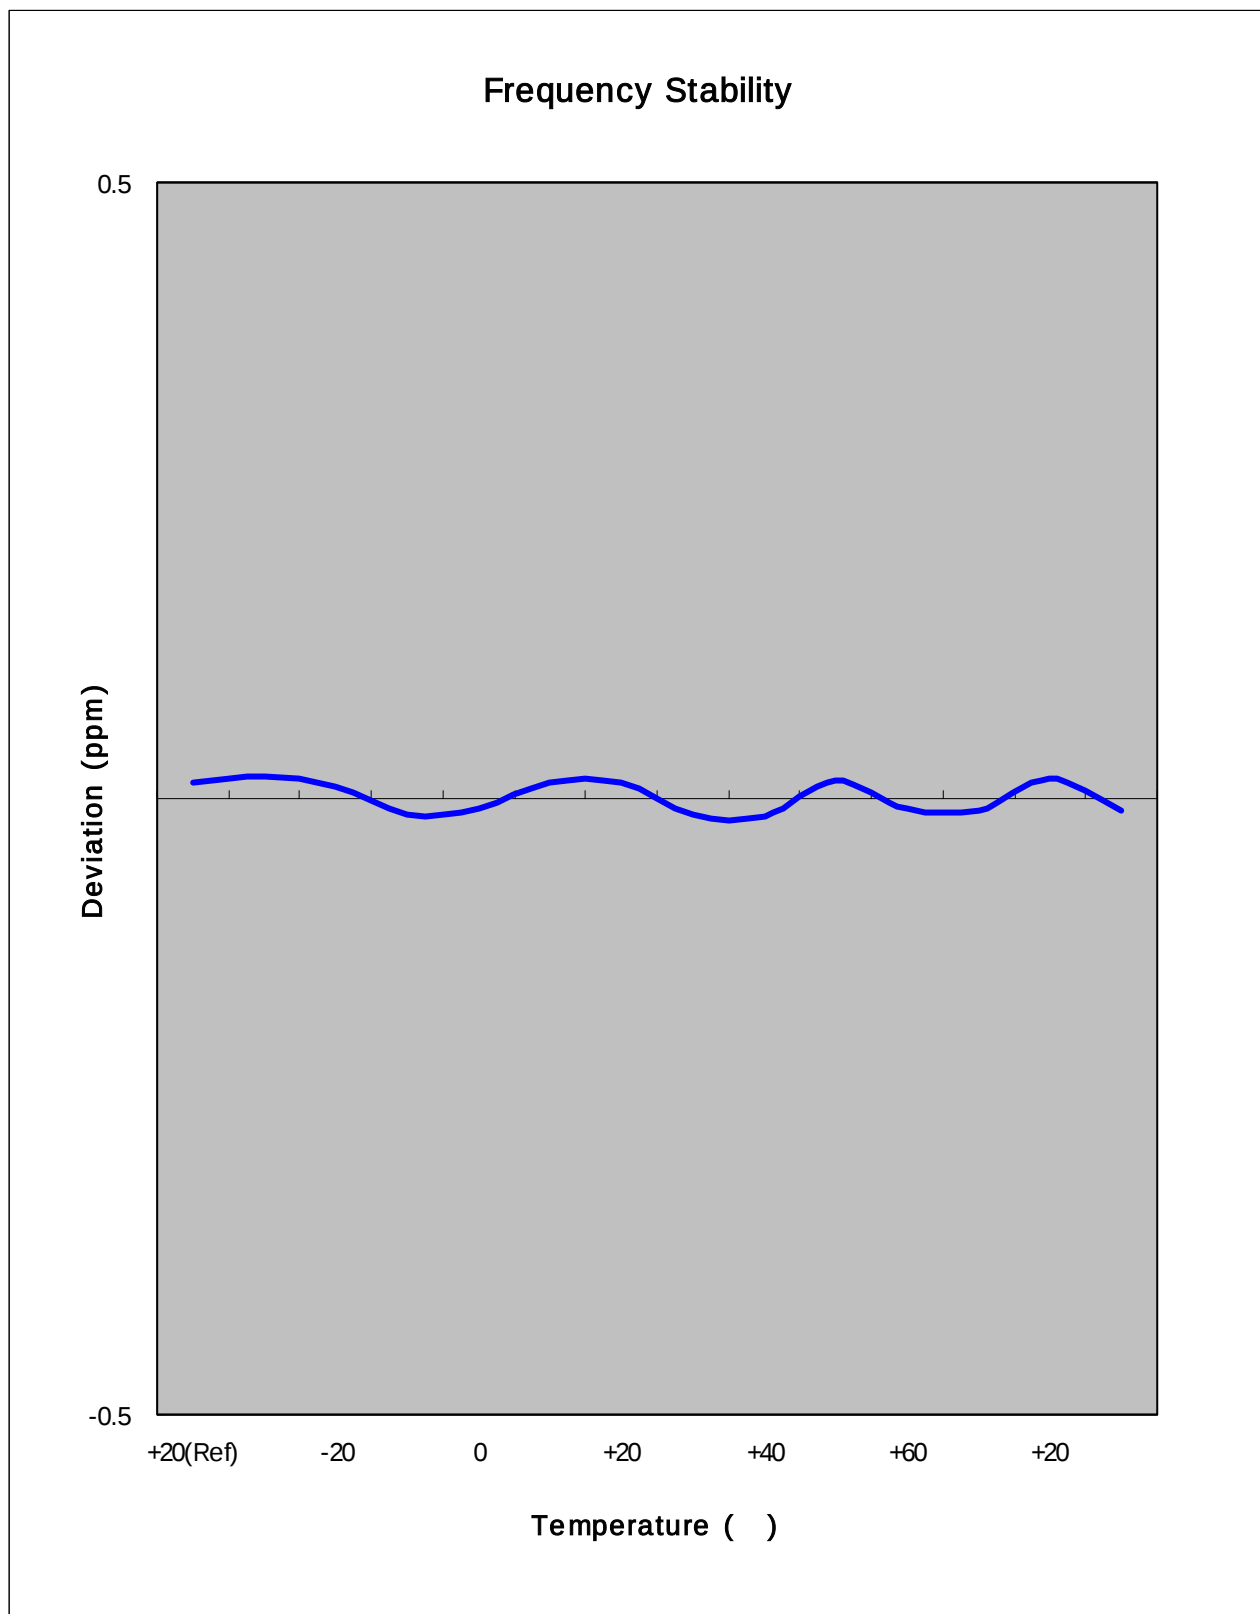



7. CONCLUSION


The data collected shows that the SAMSUNG WCDMA850/HSDPA and GSM1900/EDGE Phone with Bluetooth FCC ID : A3LSGHF480T complies with all the requirements of Parts 2, 24 of the FCC Rules.

8. TEST PLOTS

GSM1900



R T

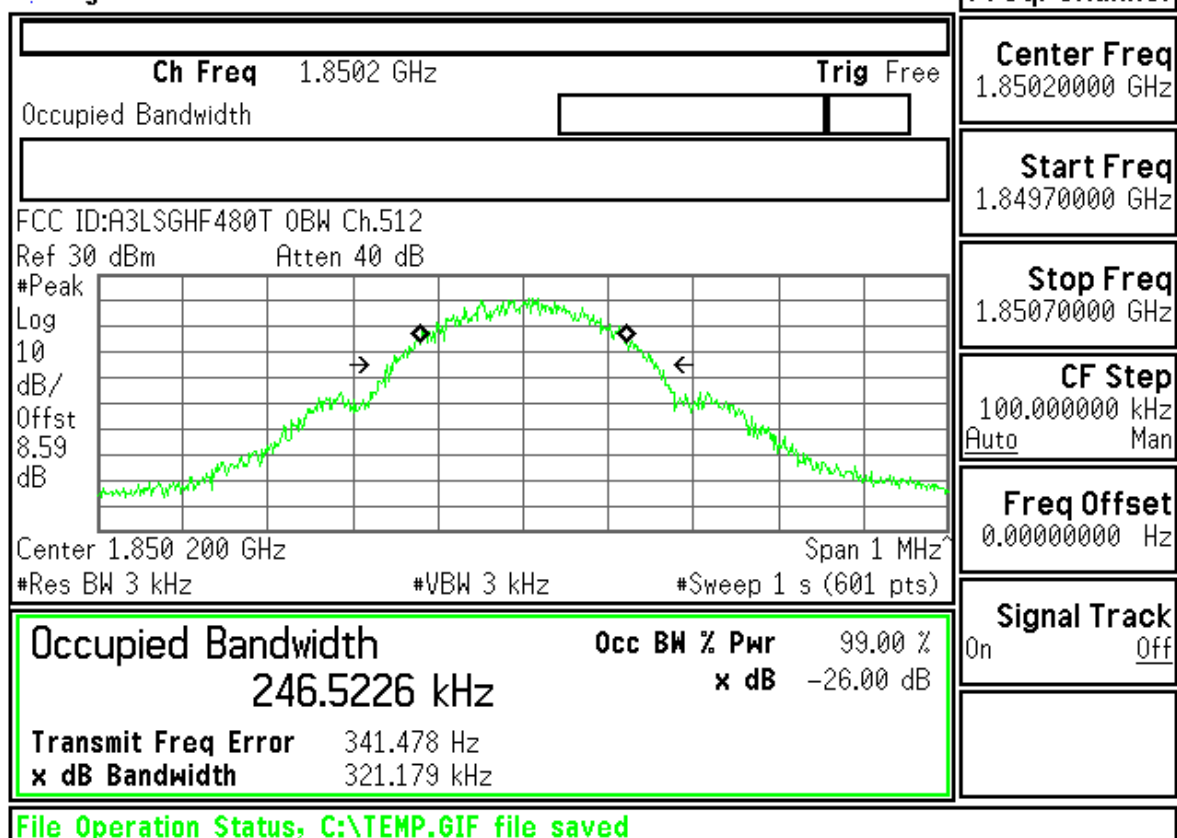

Freq/Channel

Center Freq
 1.85020000 GHz

Start Freq
 1.84970000 GHz


Stop Freq
 1.85070000 GHz

CF Step
 100.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off


R T

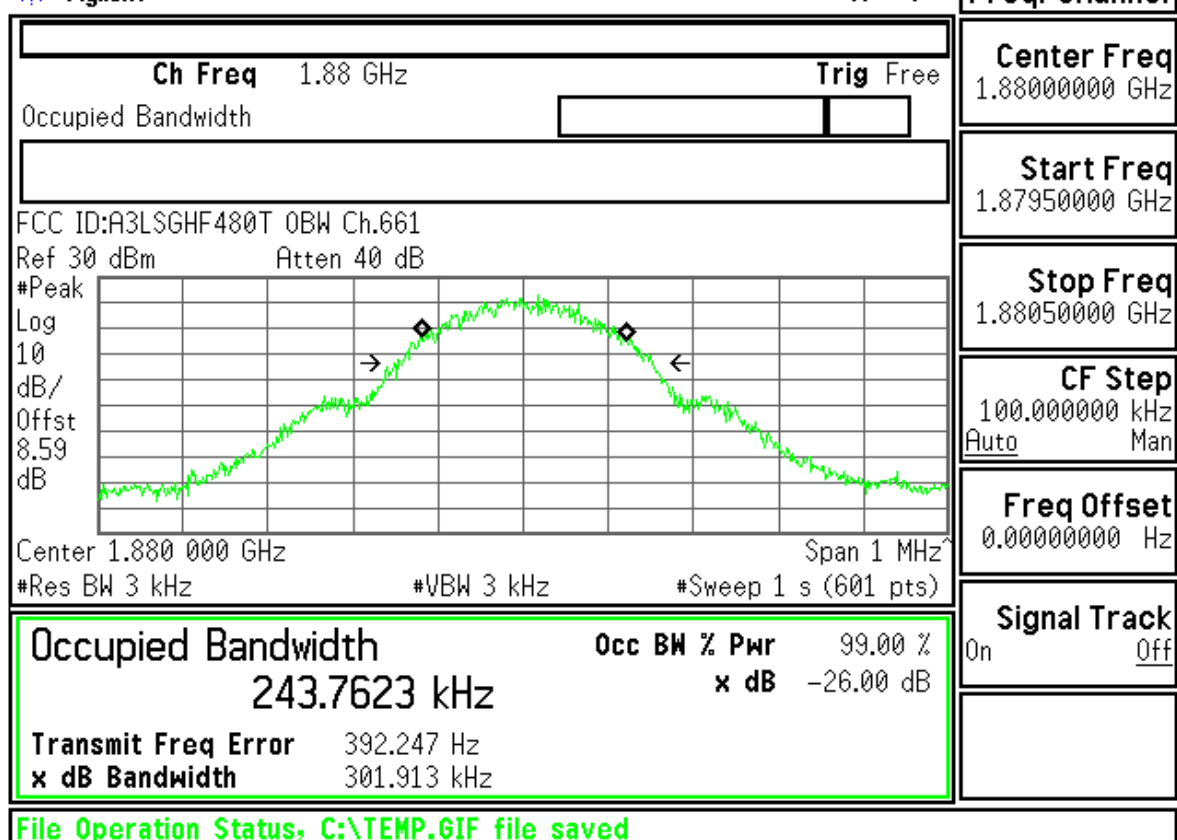

Freq/Channel

Center Freq
 1.88000000 GHz


Start Freq
 1.87950000 GHz

Stop Freq
 1.88050000 GHz

CF Step
 100.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

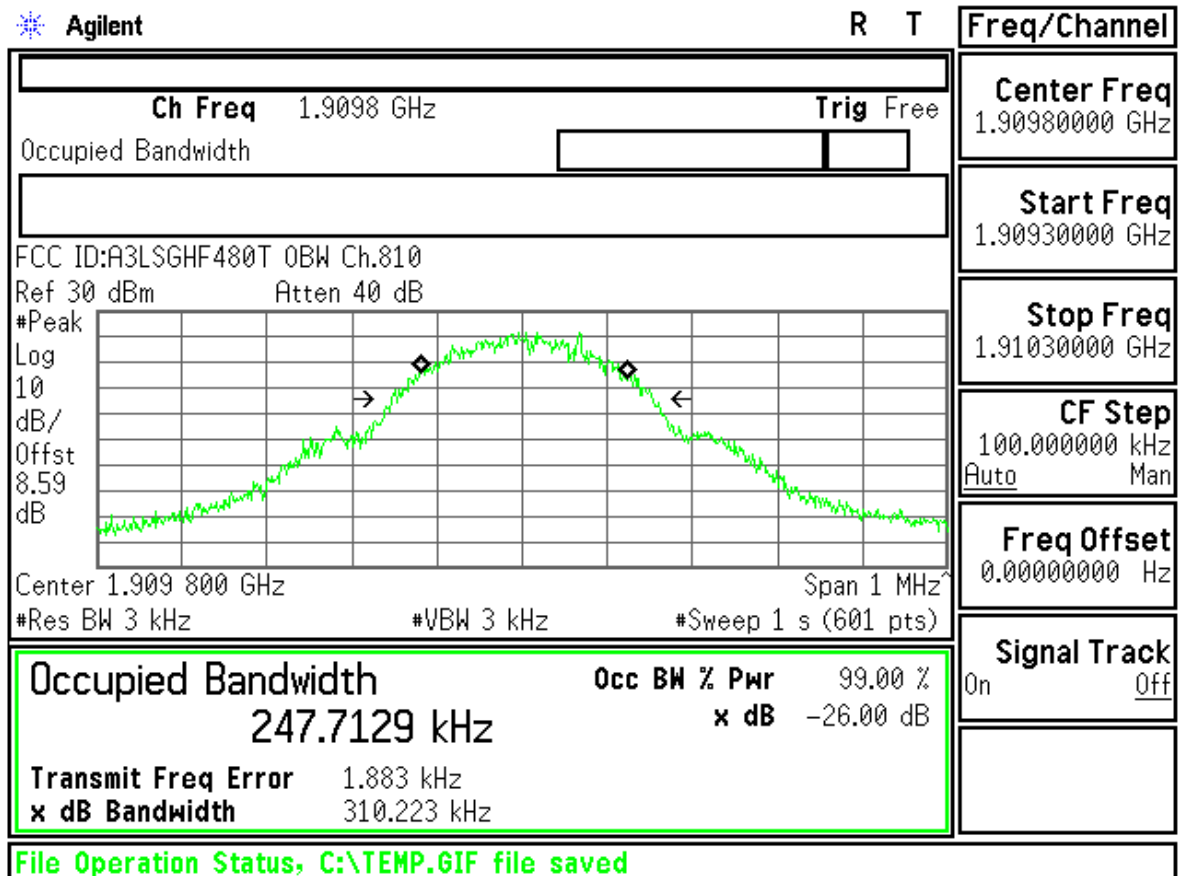

Center Freq
1.90980000 GHz

Start Freq
1.90930000 GHz

Stop Freq
1.91030000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID : A3LSGHF480T Transmit Power 512CH



Measurement/Instrument Screen									
Control	Transmit Power						TCH Parms		
Transmit Power Setup							Downlink Traffic Power		
		Burst 1	Burst 2	Burst 3	Burst 4		Traffic Band		
	Burst Power	29.79	----	----	----		PCS		
	Estimated Carrier Power	29.79	----	----	----		Traffic Channel		
						Single	512		
	Phase & Frequency Error						MS TX Level		
		Peak Phase °	RMS Phase °	Frequency Hz			0		
	Minimum	3.01	1.11	-31.21			Channel Mode Setup		
	Maximum	5.34	1.69	-11.17					
	Average	3.86	1.38	-19.48			Return		
	Pass/Fail	Pass	Pass	Pass					
	50 / 50					Single			
	Background	Active Cell Connected			Sys Type: GSM				
1 of 2		IntRef	Offset	R T			1 of 2		



Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
									Traffic Band	
									PCS	
									Traffic Channel	
Swap Window Positions									MS TX Level	
									0	
									Channel Mode Setup ▾	
									Return	
1 of 2									1 of 2	



Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
									Traffic Band	
									PCS	
									Traffic Channel	
Swap Window Positions									MS TX Level	
									0	
									Channel Mode Setup ▾	
									Return	
1 of 2									1 of 2	

Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
									Traffic Band	
									PCS	
									Traffic Channel	
Swap Window Positions									MS TX Level	
									0	
									Channel Mode Setup ▾	
									Return	
1 of 2									1 of 2	

Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
									Traffic Band	
									PCS	
									Traffic Channel	
Swap Window Positions									MS TX Level	
									0	
									Channel Mode Setup ▾	
									Return	
1 of 2									1 of 2	

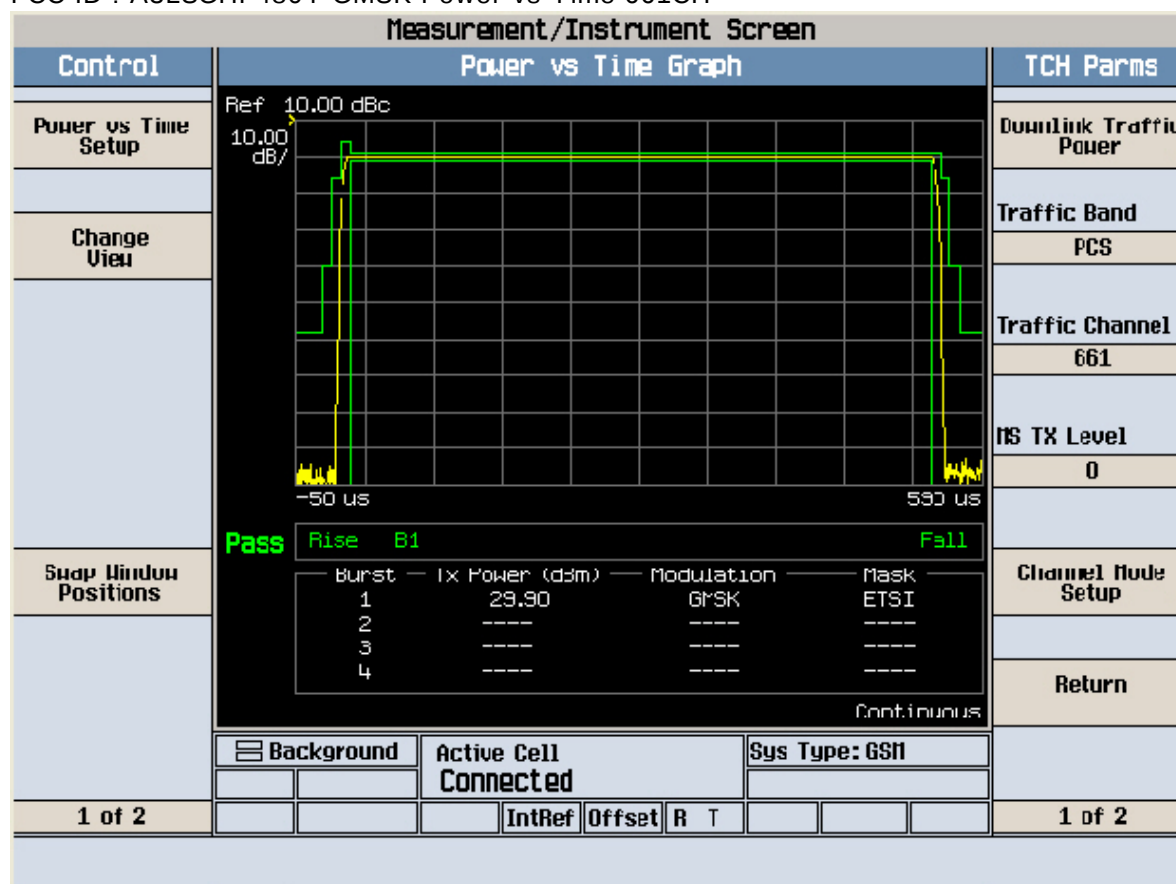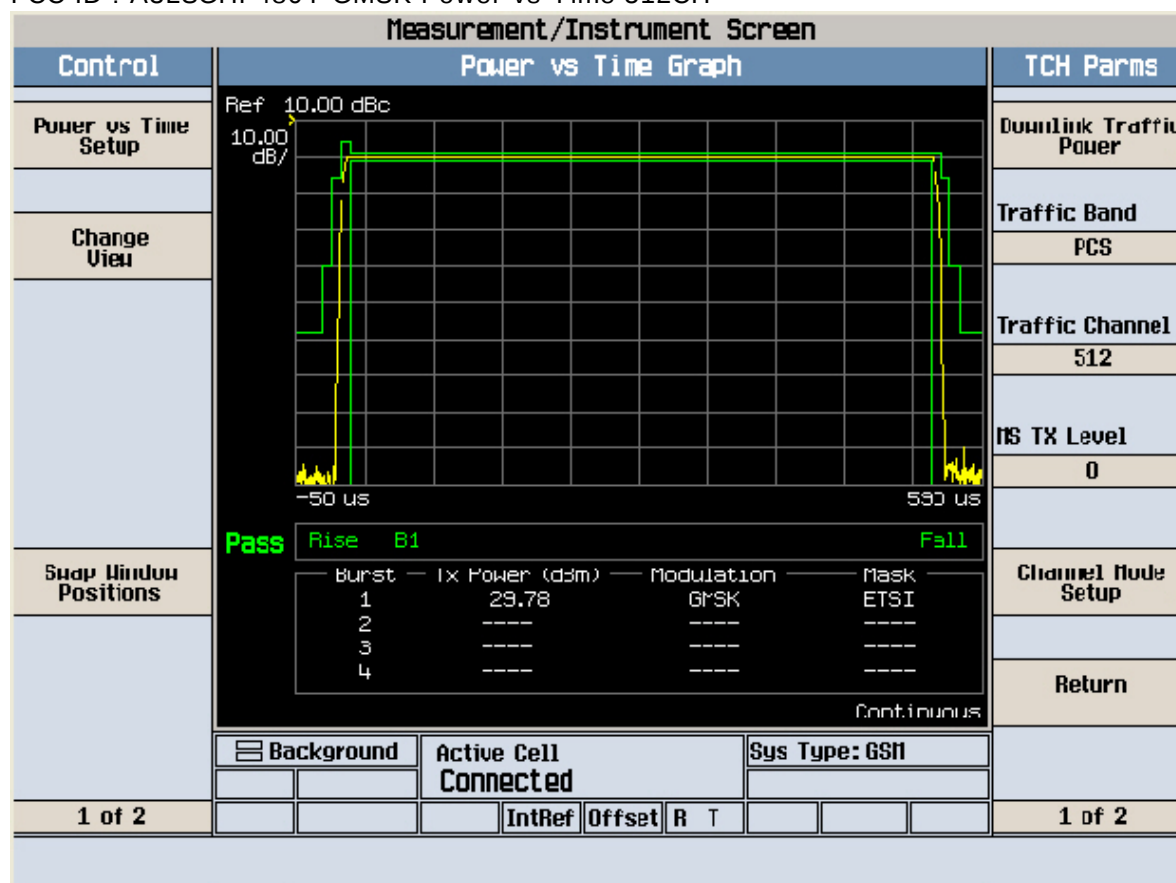

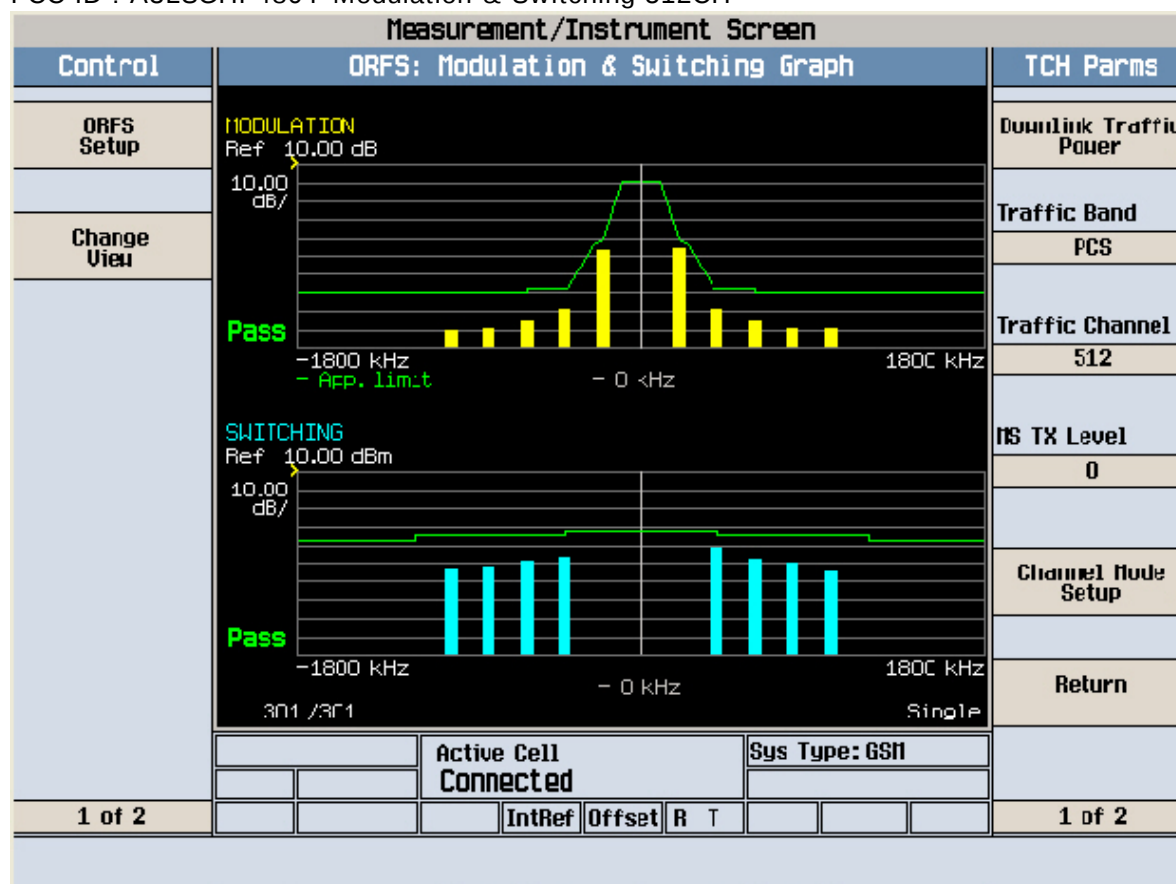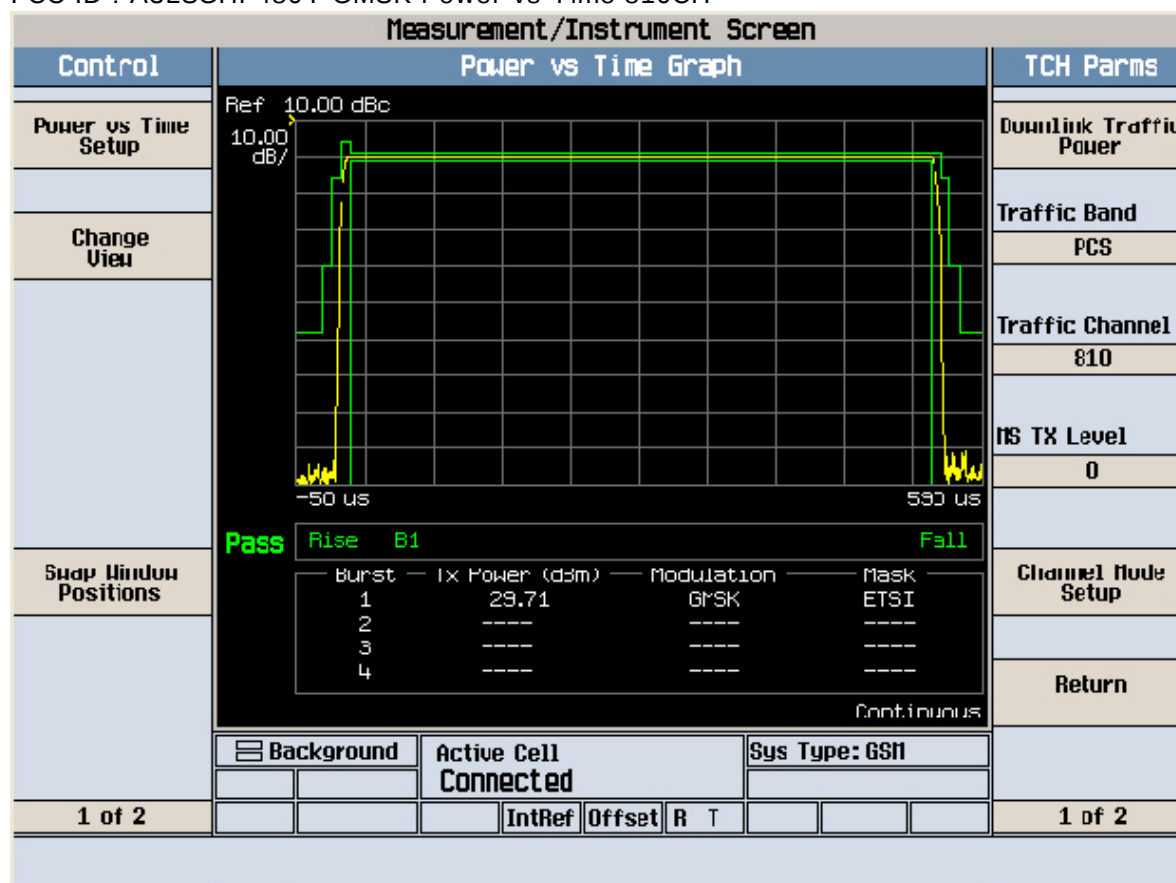

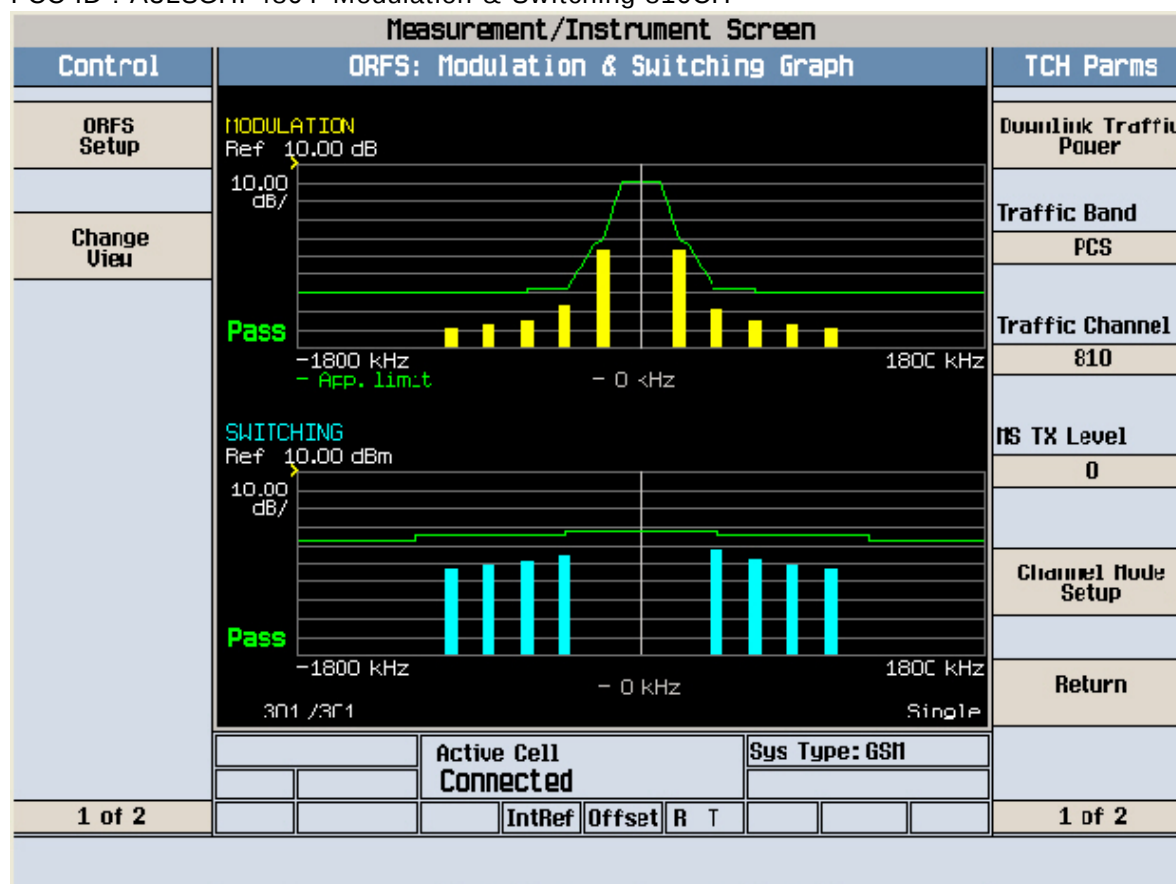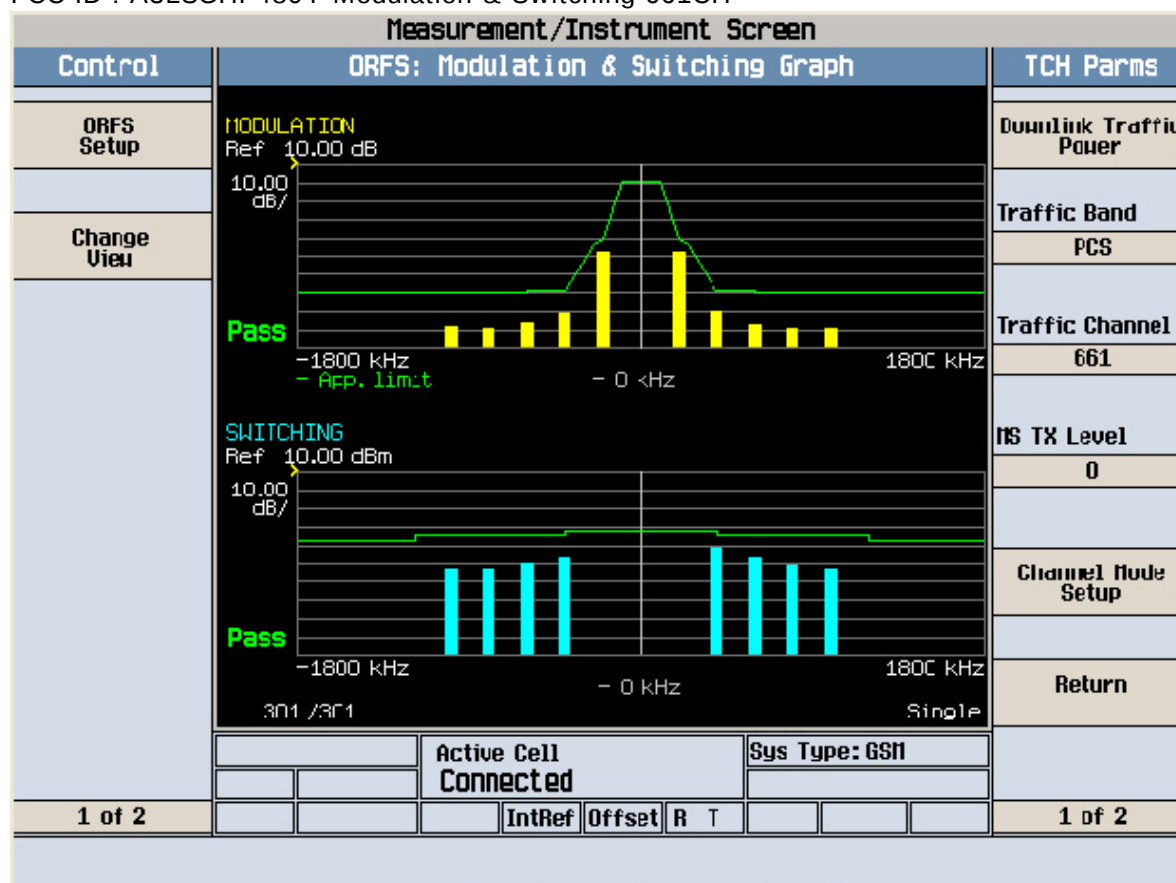

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.512

Mkr1 1.192 GHz

Ref 30 dBm

Atten 40 dB

-33.23 dBm

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

926.350000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.84270000 GHz

CF Step

183.270000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

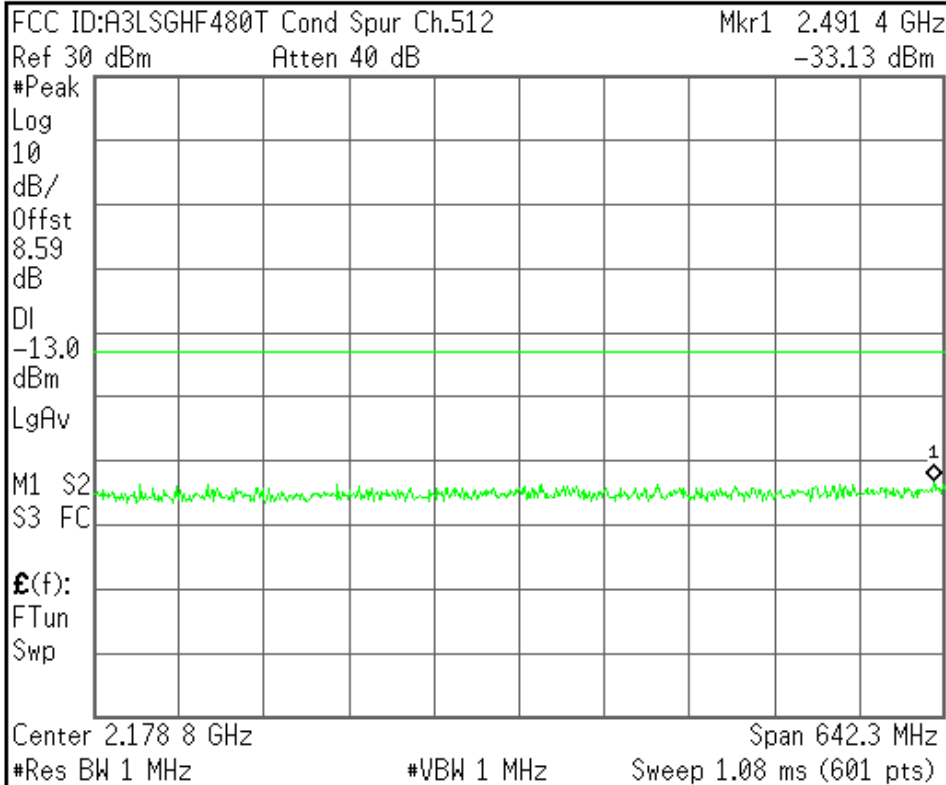

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

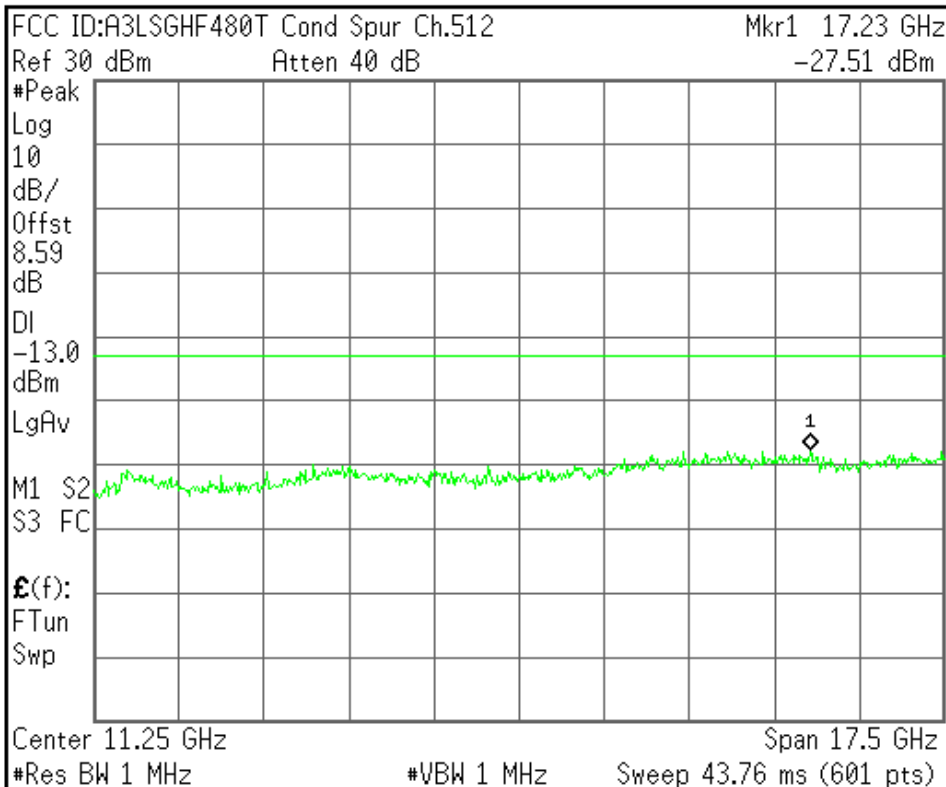

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.661

Mkr1 982 MHz

Ref 30 dBm

Atten 40 dB

-33.22 dBm

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

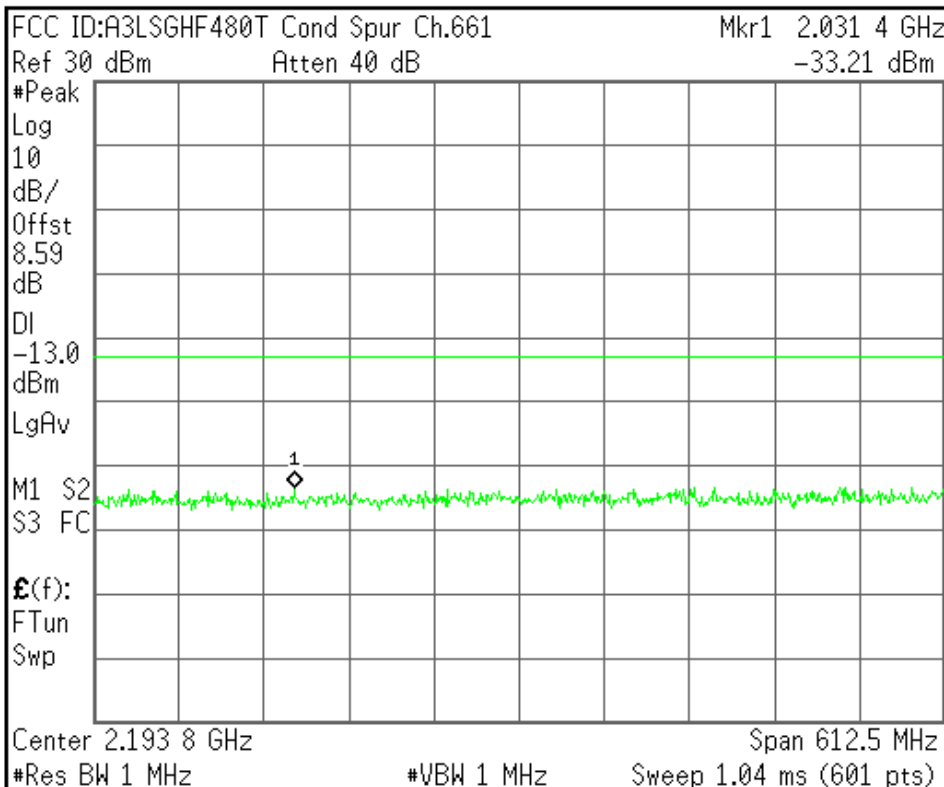

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

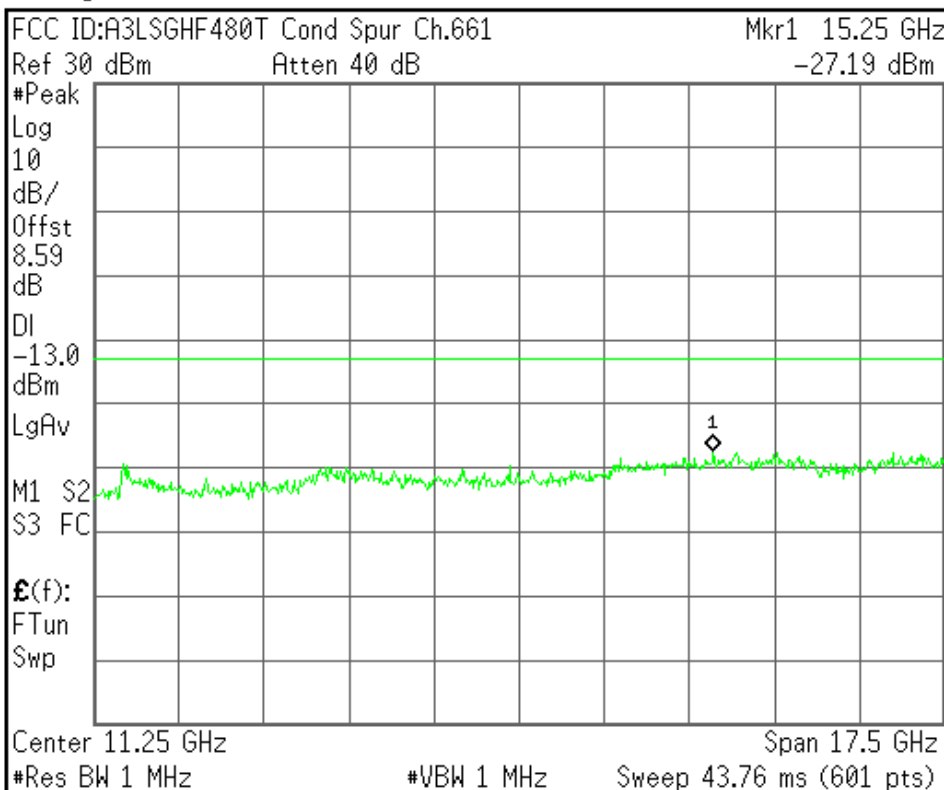

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.00000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Cond Spur Ch.810

Mkr1 360 MHz

Ref 30 dBm

Atten 40 dB

-32.77 dBm

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

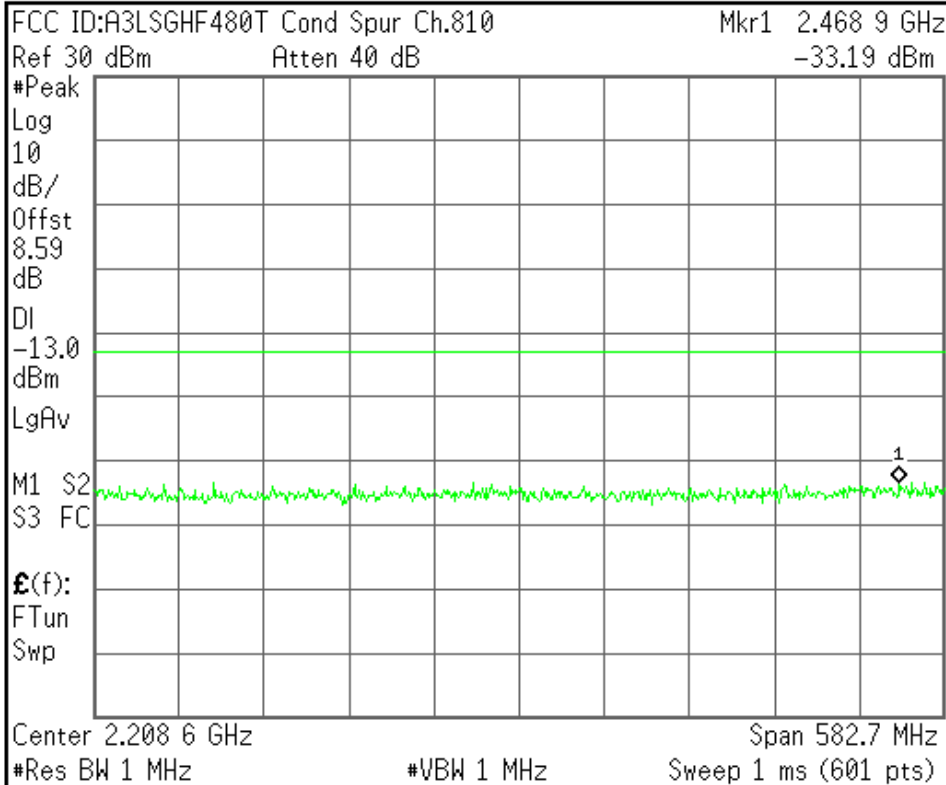

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

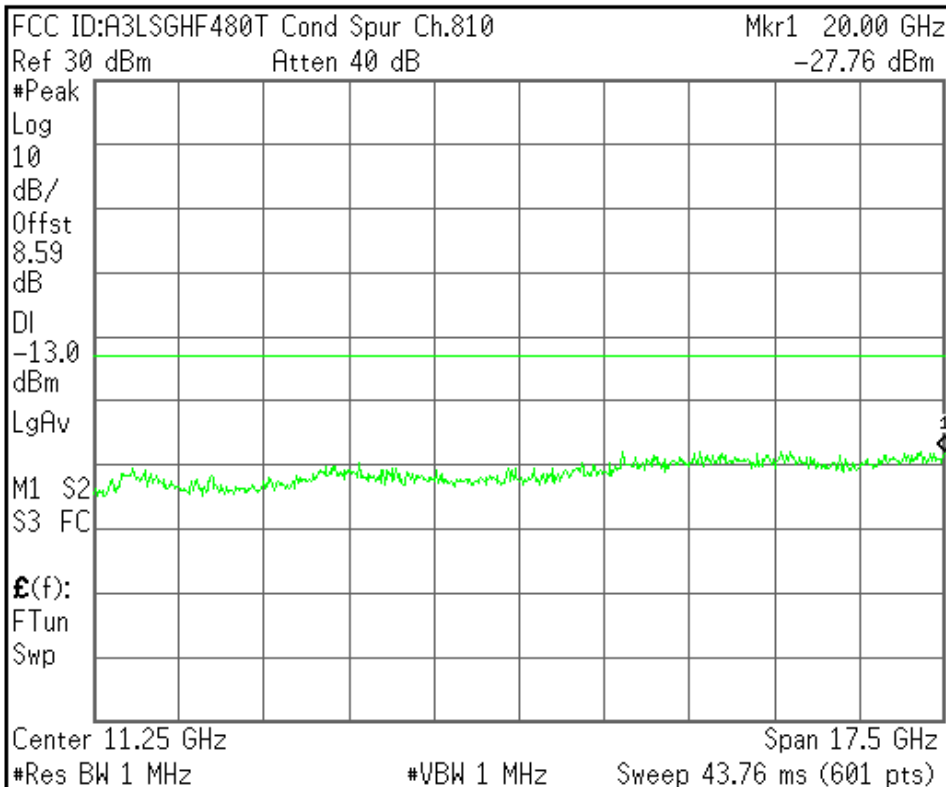

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.00000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

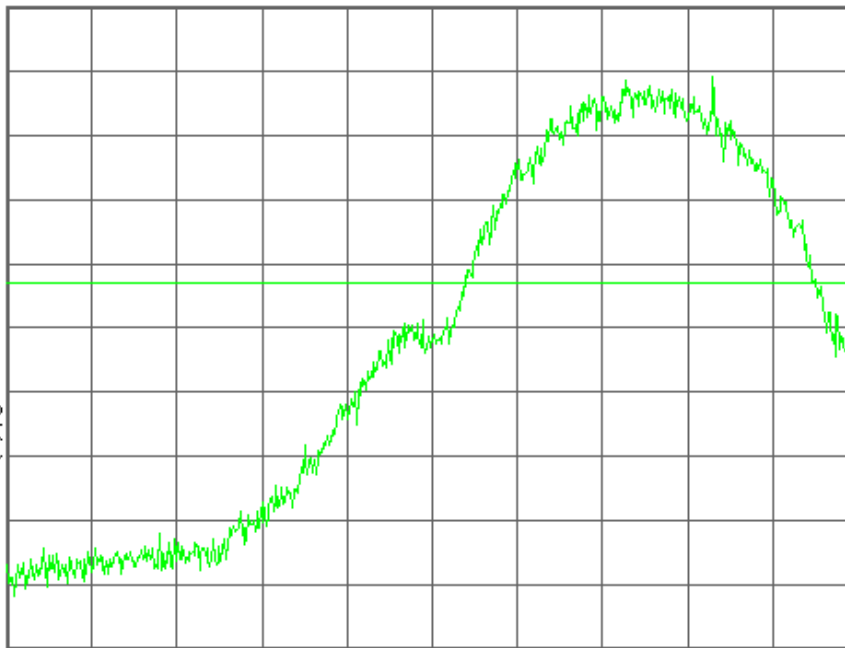

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.512

Mkr1 1.849 975 9 GHz

Ref 30 dBm

Atten 40 dB

-17.88 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

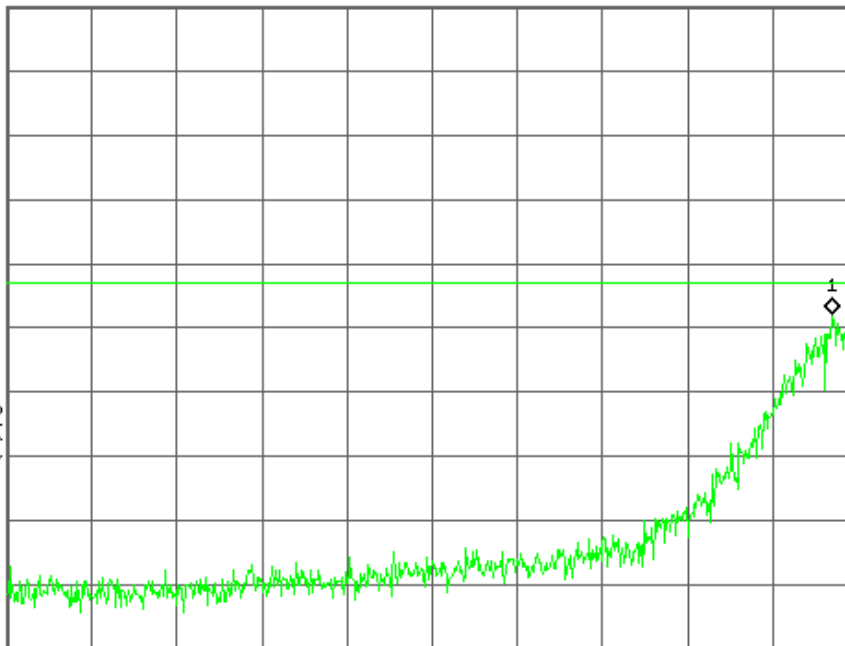

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

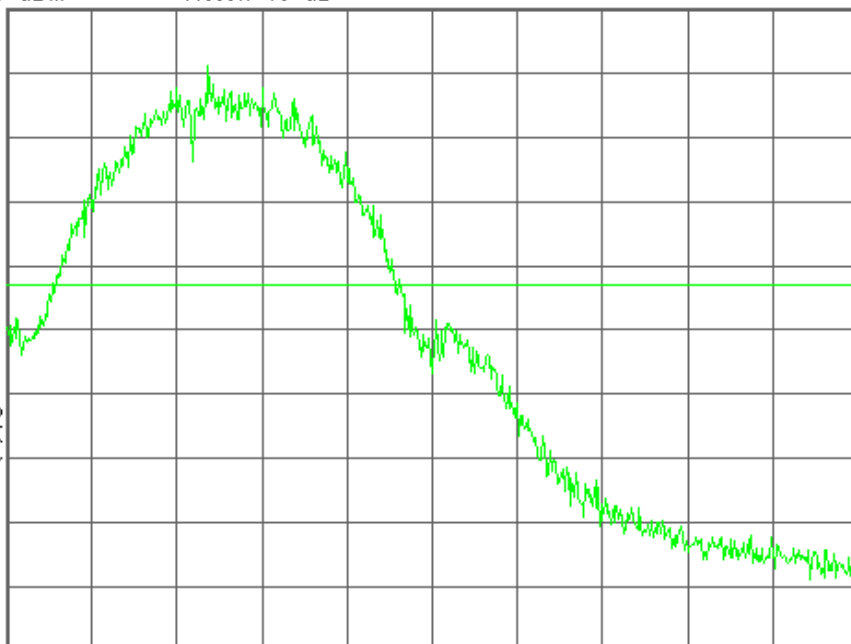

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.810

Mkr1 1.910 021 8 GHz

Ref 30 dBm

Atten 40 dB

-17.34 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

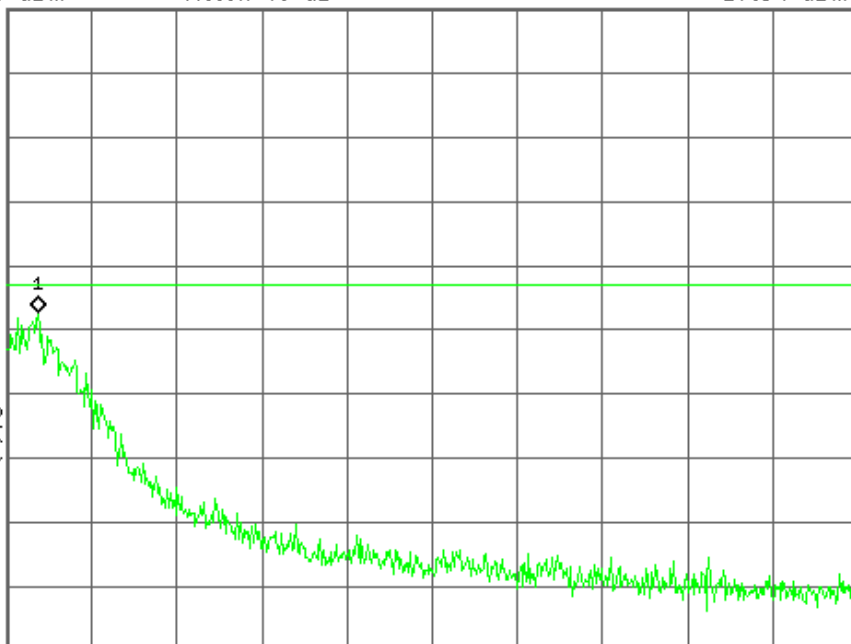

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

FDD ID:A3LSGHF480T P.A.R Ch.661

▲ Mkr1 0 Hz

Ref 32 dBm

Atten 40 dB

-0.073 dB

#Avg

Log

10

dB/

Offst

8.59

dB

#LgAv

V1 V2

S3 FC

£(f):

FTun

Swp

Center 1.880 000 GHz

Span 5 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


EDGE1900



Agilent

R T


Freq/Channel

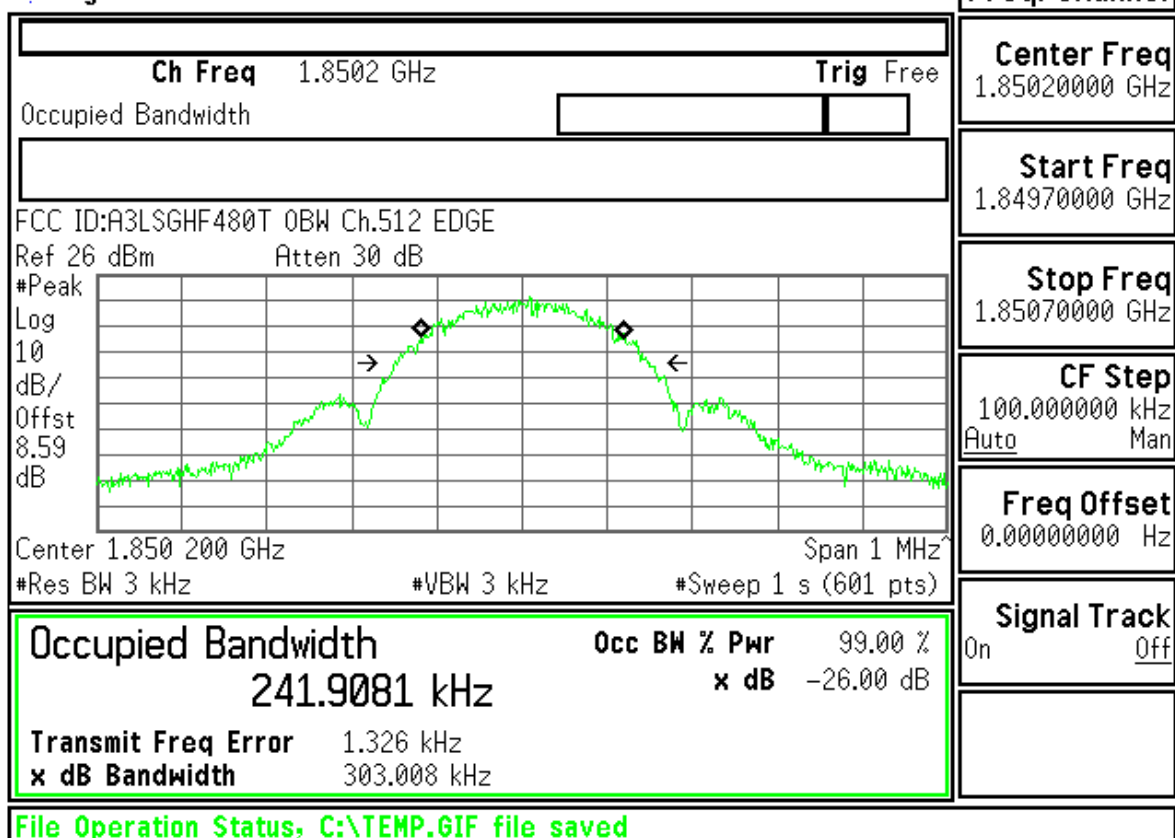
Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T

Freq/Channel

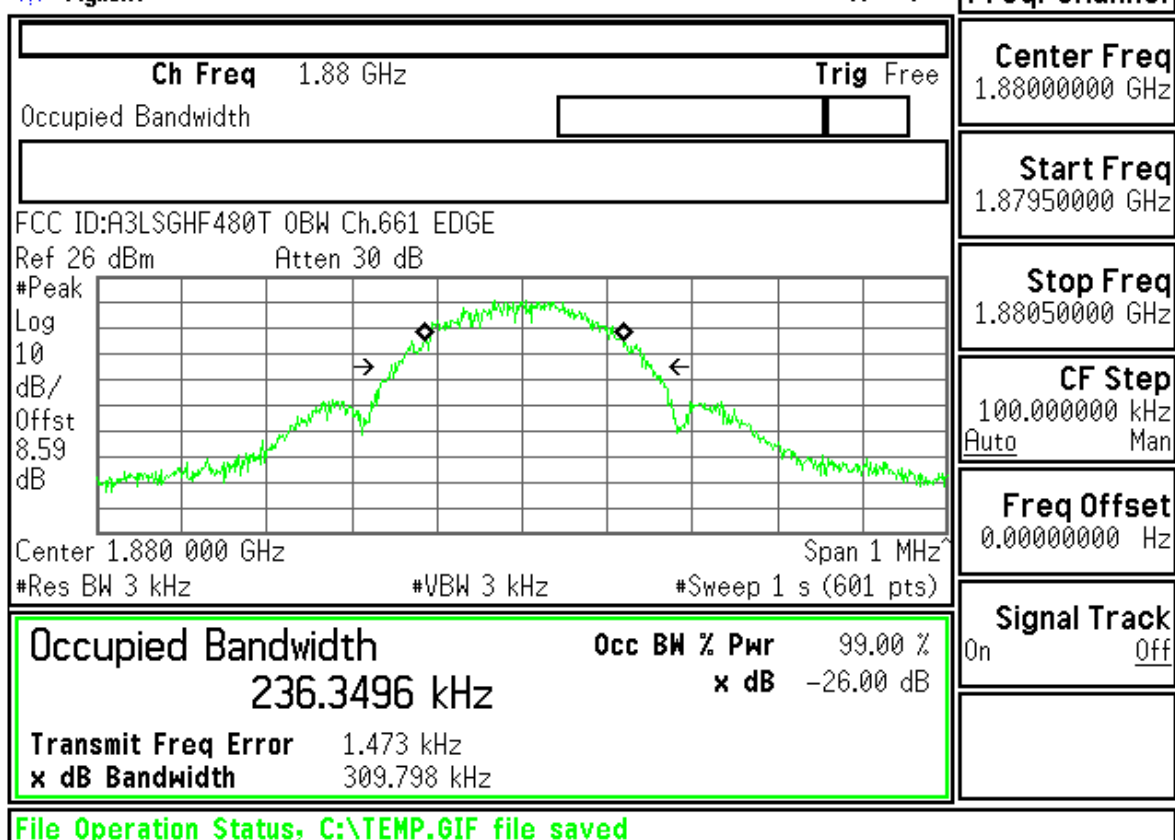Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

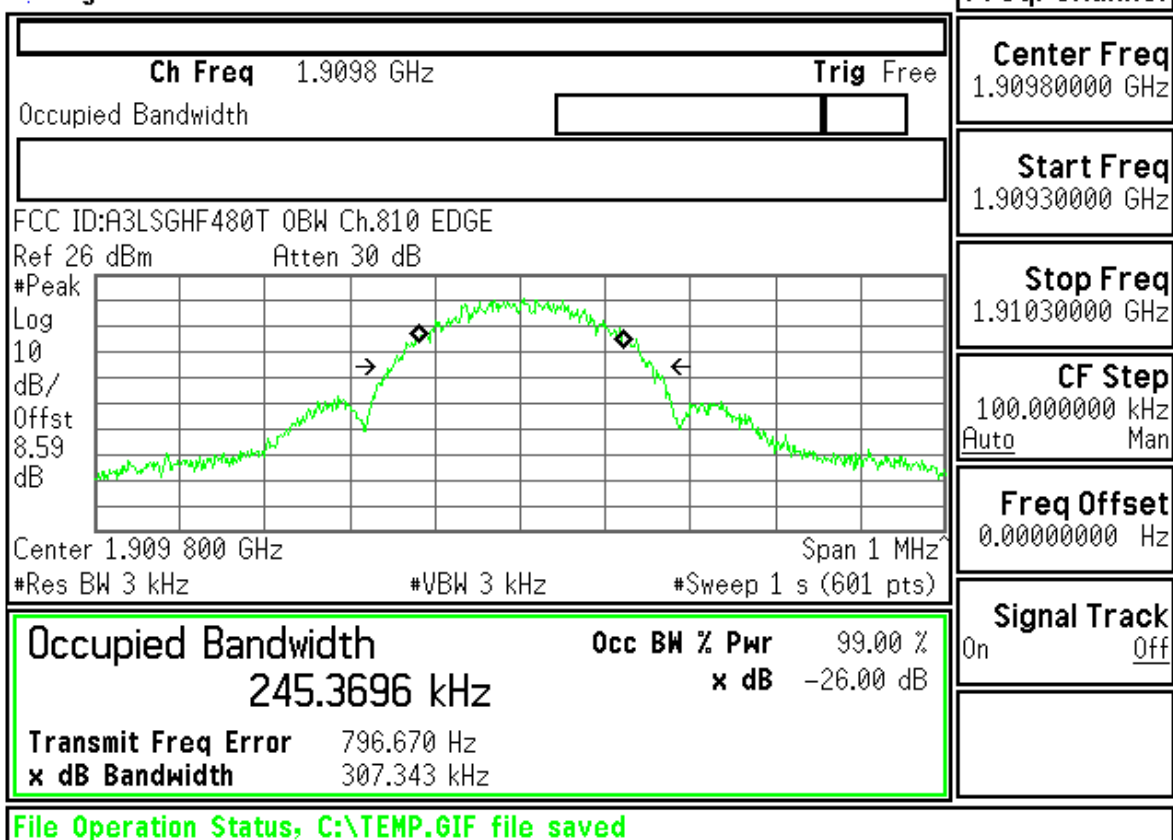

ID : A3LSGHF480T Transmit Power 512CH EDGE

Control	EGPRS Transmit Power								PDCH Parms				
EGPRS Transmit Power Setup ▾	EPK Burst Power				EPK Est Carrier Power				Downlink Traffic Power ▾				
	Minimum		Maximum		Minimum		Maximum		Traffic Band				
	25.56 dBm		26.78 dBm		26.32 dBm		26.35 dBm		PCS				
	Average		Std Dev		Average		Std Dev		Traffic Channel				
	26.26 dBm		0.22 dBm		26.33 dBm		0.01 dBm		512				
	200 /200				Single								
									HS TX Level ▾				
									Modulation Coding Scheme ▾				
								Return					
		Active Cell Transferring				Sys Type: EGPRS							
1 of 2						IntRef	Offset	R	T			1 of 2	

Control	EGPRS Transmit Power							PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum		Maximum	Minimum		Maximum		Traffic Band	
	24.10 dBm		25.49 dBm	24.91 dBm		24.93 dBm		PCS	
	Average		Std Dev	Average		Std Dev		Traffic Channel	
	24.87 dBm		0.22 dBm	24.92 dBm		0.00 dBm		661	
	200 /200			Single					
								HS TX Level ▾	
								Modulation Coding Scheme ▾	
							Return		
		Active Cell Transferring			Sys Type: EGPRS				
1 of 2			IntRef	Offset	R	T			1 of 2

Control	EGPRS Transmit Power								PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power	
	Minimum		Maximum		Minimum		Maximum		Traffic Band	
	24.14 dBm		25.24 dBm		24.73 dBm		24.76 dBm		PCS	
	Average		Std Dev		Average		Std Dev		Traffic Channel	
	24.68 dBm		0.20 dBm		24.74 dBm		0.00 dBm		810	
	200 /200				Single					
									HS TX Level	
									Modulation Coding Scheme	
								Return		
		Active Cell Transferring				Sys Type: EGPRS				
1 of 2				IntRef	Offset	R	T			1 of 2

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

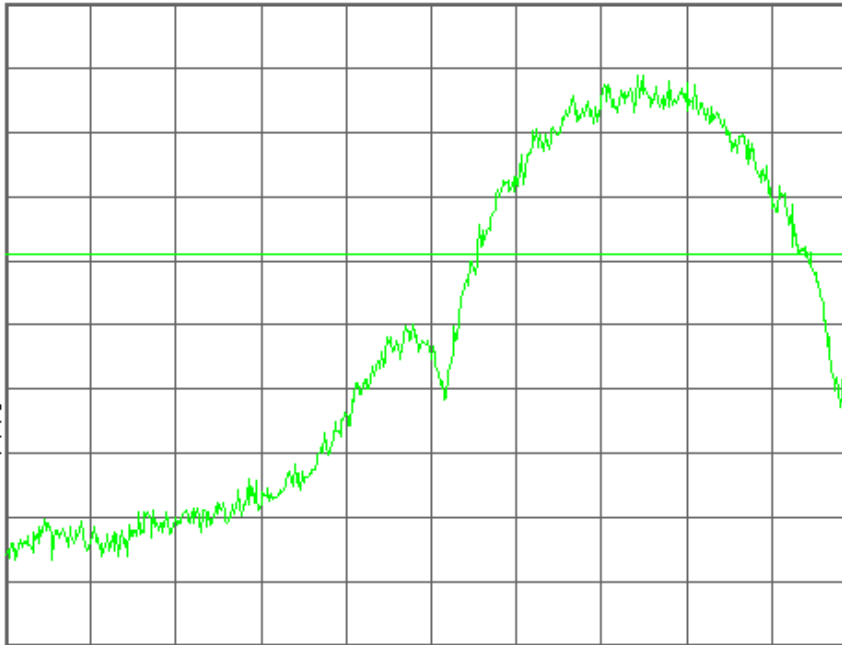

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.512 EDGE

Mkr1 1.849 975 9 GHz

Ref 26 dBm

Atten 30 dB

-24.52 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

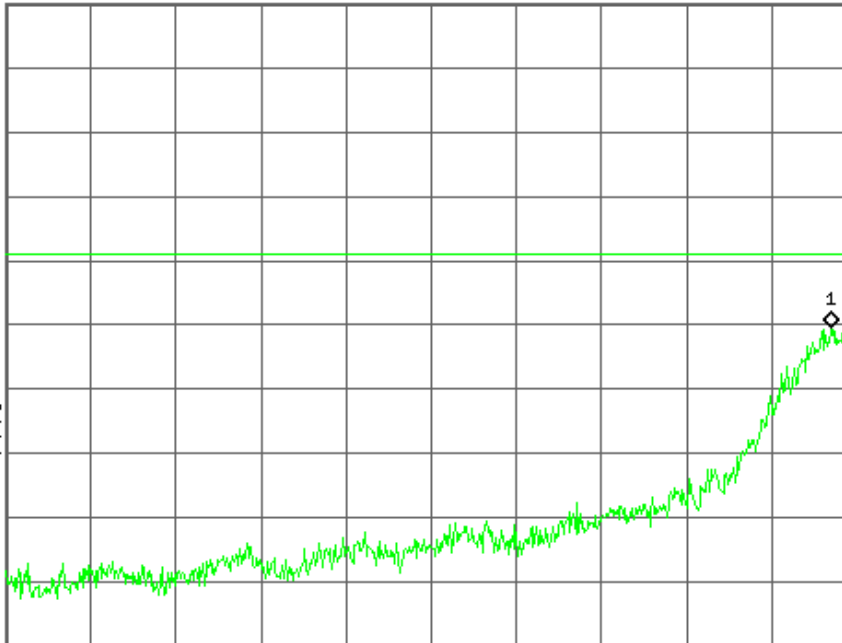

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.810 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

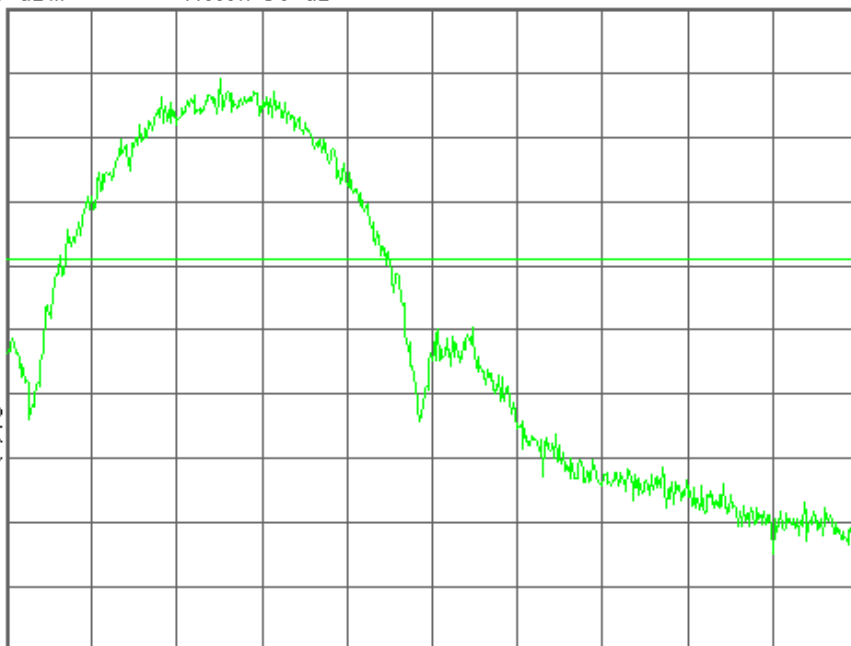

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHF480T Band Edge Ch.810 EDGE

Mkr1 1.910 035 7 GHz

Ref 26 dBm

Atten 30 dB

-24.08 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

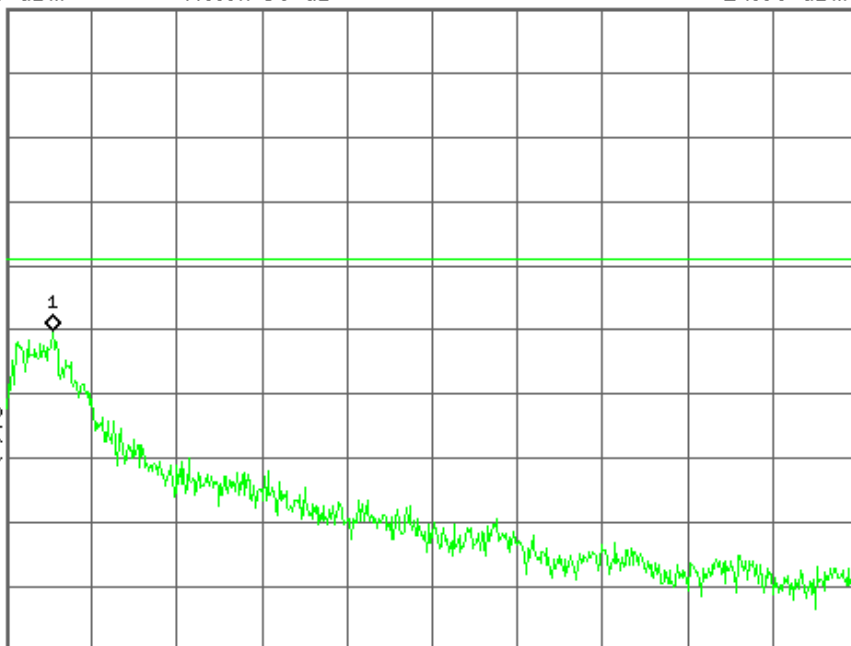

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

