



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested : **SGH-G618**
FCC ID(Requested) : **A3LSGHG618**
Report No : **FF-082-R1**
Job No : **FF-082**
Date issued : **April 30, 2008**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part24.

Prepared By

JH WOO - Test Engineer

Authorized By

WW JANG - Technical
Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Occupied Bandwidth	10
5.4. Spurious and Harmonic Emission at Antenna Terminal	10
5.4.1. Occupied Bandwidth Emission Limits	10
5.4.2. Conducted Spurious Emission	12
5.5. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)	14
6.2. GSM1900 Radiated Spurious & Harmonic measurement	15
6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table	16
6.4. Frequency Stability	17
6.4.1. GSM1900 Frequency Stability Table	17
6.4.2. GSM1900 Frequency Stability Graph	18
7. CONCLUSION	22
8. TEST PLOTS	23



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHG618
- Quantity : Quantity production is planned
- Emission Designators : 253KGXW(GSM1900), 248KG7W(GSM1900 EDGE)
- Tx Freq. Range : 1850.2MHz -1909.8MHz (GSM1900)
- Rx Freq. Range : 1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.425 W EIRP GSM1900 (26.28dBm)
0.152 W EIRP GSM1900 EDGE(21.83dBm)
- FCC Classification(s) : Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Single-Band PCS GSM/EDGE Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §2.
- Dates of Test : April 23-24, 2008
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FF-082-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2008-10-17
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000233	2008-07-23
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2008-06-26
Power Sensor	8485A	3318A19924	2008-10-01
Power Meter	E4419B	GB41293846	2008-09-06
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	GB42230535	2009-01-02
	8960	GB42360886	2008-07-03
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
Dipole Antenna	3121C-DB4	9007-588	2008-05-29
Communication test set	CMU200	109162	2008-10-17
Receive Antenna	HL040	353255/019	2008-09-20
Power Supply	E3640A	MY40003594	2008-06-25
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2008-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

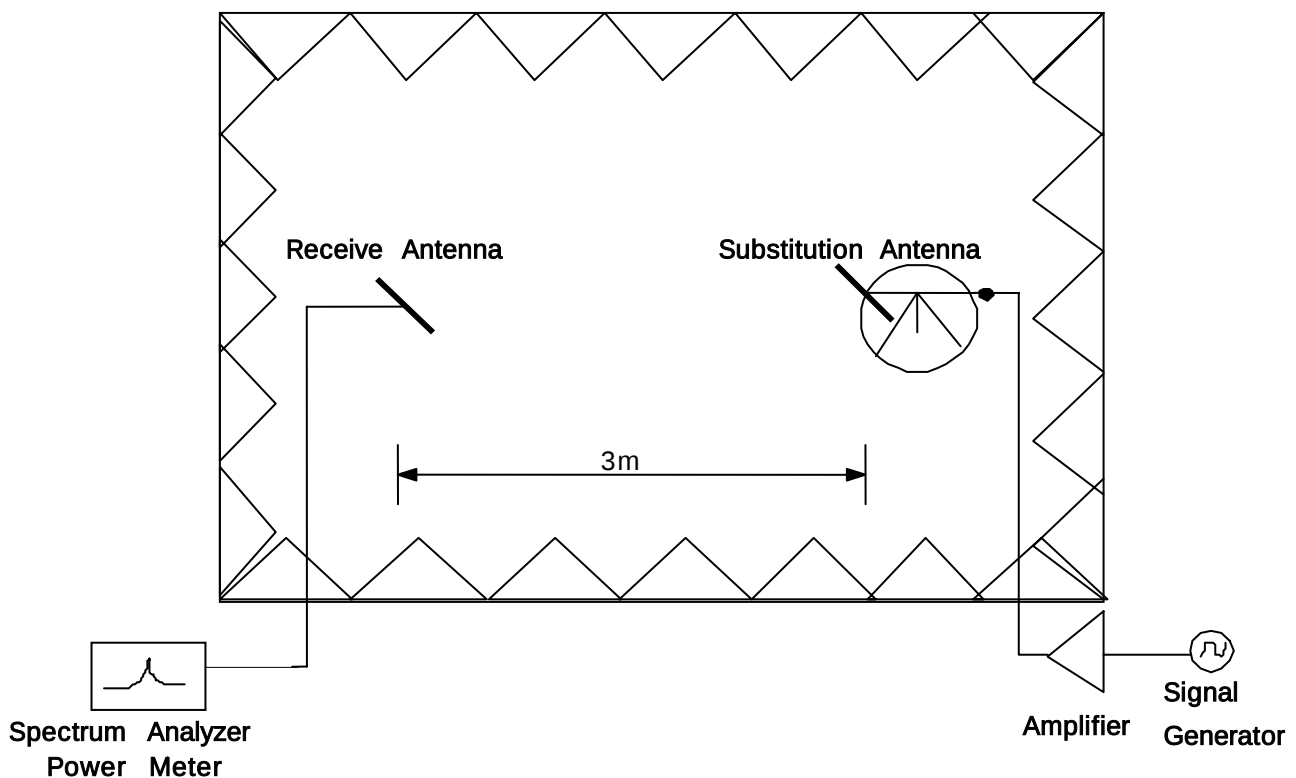


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

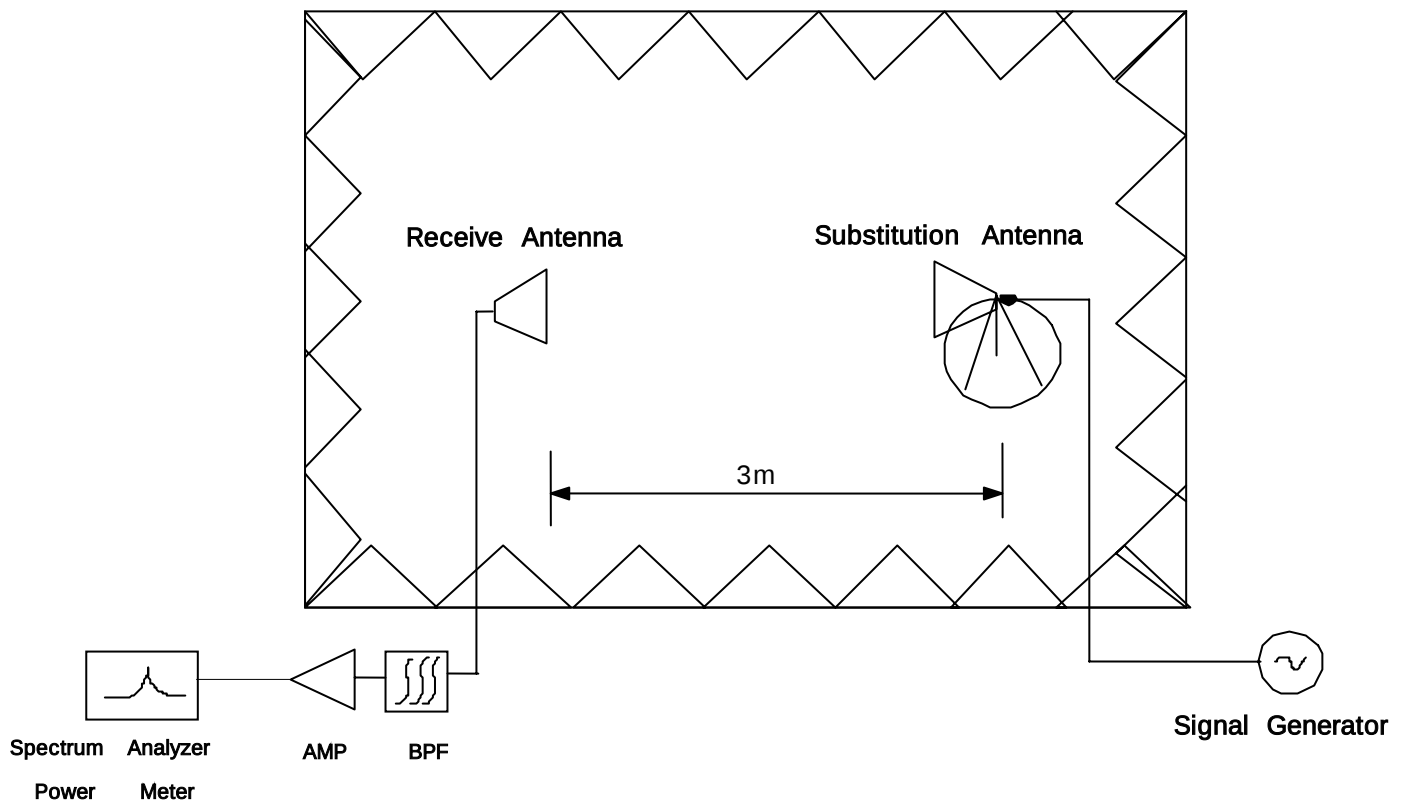


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.4. Spurious and Harmonic Emission at Antenna Terminal

5.4.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.4.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.425 \text{ W}) = 39.28 \text{ dB}$$

$$26.28 \text{ dBm} - 39.28 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.5. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	26.00	H	-12.40	9.70	-22.10
		V	-12.65	9.70	-22.35
1880.00	24.00	H	-14.84	9.70	-24.54
		V	-14.43	9.70	-24.13
1909.80	22.00	H	-16.72	9.70	-26.42
		V	-16.52	9.70	-26.22

■ Result (Slide Up)

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-22.07	V	260/45	26.28	0.425	Standard
1880.00	-23.88	V	248/64	24.25	0.266	Standard
1909.80	-25.91	V	262/66	22.31	0.171	Standard

■ EDGE Result (Slide Up)

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-26.52	V	260/45	21.83	0.152	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 26.28 dBm = 0.425 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 39.28 \text{ dBc}$

■ Result (Slide Up)

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
512	2	3700.40	-54.79	56.75	V
	3	5550.60	-62.38	59.94	V
	4	7400.80	-64.00	57.97	H
	5	9251.00	-68.11	57.90	V
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-48.26	49.93	V
	3	5640.00	-58.79	56.31	V
	4	7520.00	-64.95	59.33	V
	5	9400.00	-68.78	58.58	H
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-46.58	48.27	H
	3	5729.40	-53.73	50.74	V
	4	7639.20	-64.64	58.81	V
	5	9549.00	-68.43	58.43	V
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2008.04.24

Test Engineer : JH WOO

Tx Cable loss
Tx Horn Ant Gain
Tx Level to radiate -13dBm
ESI Level received from Tx with -13dBm
Tested Level from EUT
= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : H dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-11.22	12.40	-14.20	-37.48	12.40	-54.95	-54.79	56.75	56.77
	3	5550.60	-14.53	12.90	-11.40	-41.76	12.90	-62.52	-62.38	60.04	59.94
	4	7400.80	-17.53	10.50	-6.00	-45.31	10.50	-64.00	-64.09	57.97	58.34
	5	9251.00	-20.07	11.20	-4.10	-49.28	11.20	-69.28	-68.11	59.28	57.90
	6	11101.20	-22.36	11.60	-2.20	-53.59	11.60	-	-	-	-
	7	12951.40	-23.92	12.90	-2.00	-56.64	12.90	-	-	-	-
661	2	3760.00	-11.50	12.40	-13.90	-37.64	12.40	-49.47	-48.26	51.11	49.93
	3	5640.00	-14.83	12.90	-11.10	-41.41	12.90	-61.36	-58.79	59.23	56.31
	4	7520.00	-17.89	10.60	-5.70	-44.71	10.60	-68.07	-64.95	62.64	59.33
	5	9400.00	-20.33	11.60	-4.30	-49.48	11.60	-68.78	-69.89	58.58	59.55
	6	11280.00	-22.49	12.10	-2.60	-54.00	12.10	-	-	-	-
	7	13160.00	-24.50	12.80	-1.30	-56.48	12.80	-	-	-	-
810	2	3819.60	-11.73	12.40	-13.70	-37.23	12.40	-46.58	-46.84	48.63	48.27
	3	5729.40	-14.73	13.00	-11.30	-42.68	13.00	-56.56	-53.73	53.16	50.74
	4	7639.20	-18.21	11.20	-6.00	-45.08	11.20	-66.43	-64.64	60.63	58.81
	5	9549.00	-21.01	11.70	-3.70	-49.52	11.70	-70.28	-68.43	60.04	58.43
	6	11458.80	-22.20	11.70	-2.50	-54.59	11.70	-	-	-	-
	7	13368.60	-24.36	12.30	-0.90	-58.12	12.30	-	-	-	-

6.4. Frequency Stability

6.4.1. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	31.17	1,880,000,031	0.000002	0.017
100%		-30	-12.33	1,879,999,988	-0.000001	-0.007
100%		-20	34.27	1,880,000,034	0.000002	0.018
100%		-10	-39.82	1,879,999,960	-0.000002	-0.021
100%		0	-14.60	1,879,999,985	-0.000001	-0.008
100%		+10	38.59	1,880,000,039	0.000002	0.021
100%		+20	31.17	1,880,000,031	0.000002	0.017
100%		+30	-14.24	1,879,999,986	-0.000001	-0.008
100%		+40	-19.98	1,879,999,980	-0.000001	-0.011
100%		+50	20.01	1,880,000,020	0.000001	0.011
100%		+60	-15.46	1,879,999,985	-0.000001	-0.008
85%	3.35	+20	54.67	1,880,000,055	0.000003	0.029
115%	4.26	+20	19.38	1,880,000,019	0.000001	0.010
Batt.Endpoint	3.35	+20	54.67	1,880,000,055	0.000003	0.029

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.


6.4.2. GSM1900 Frequency Stability Graph

Frequency Stability

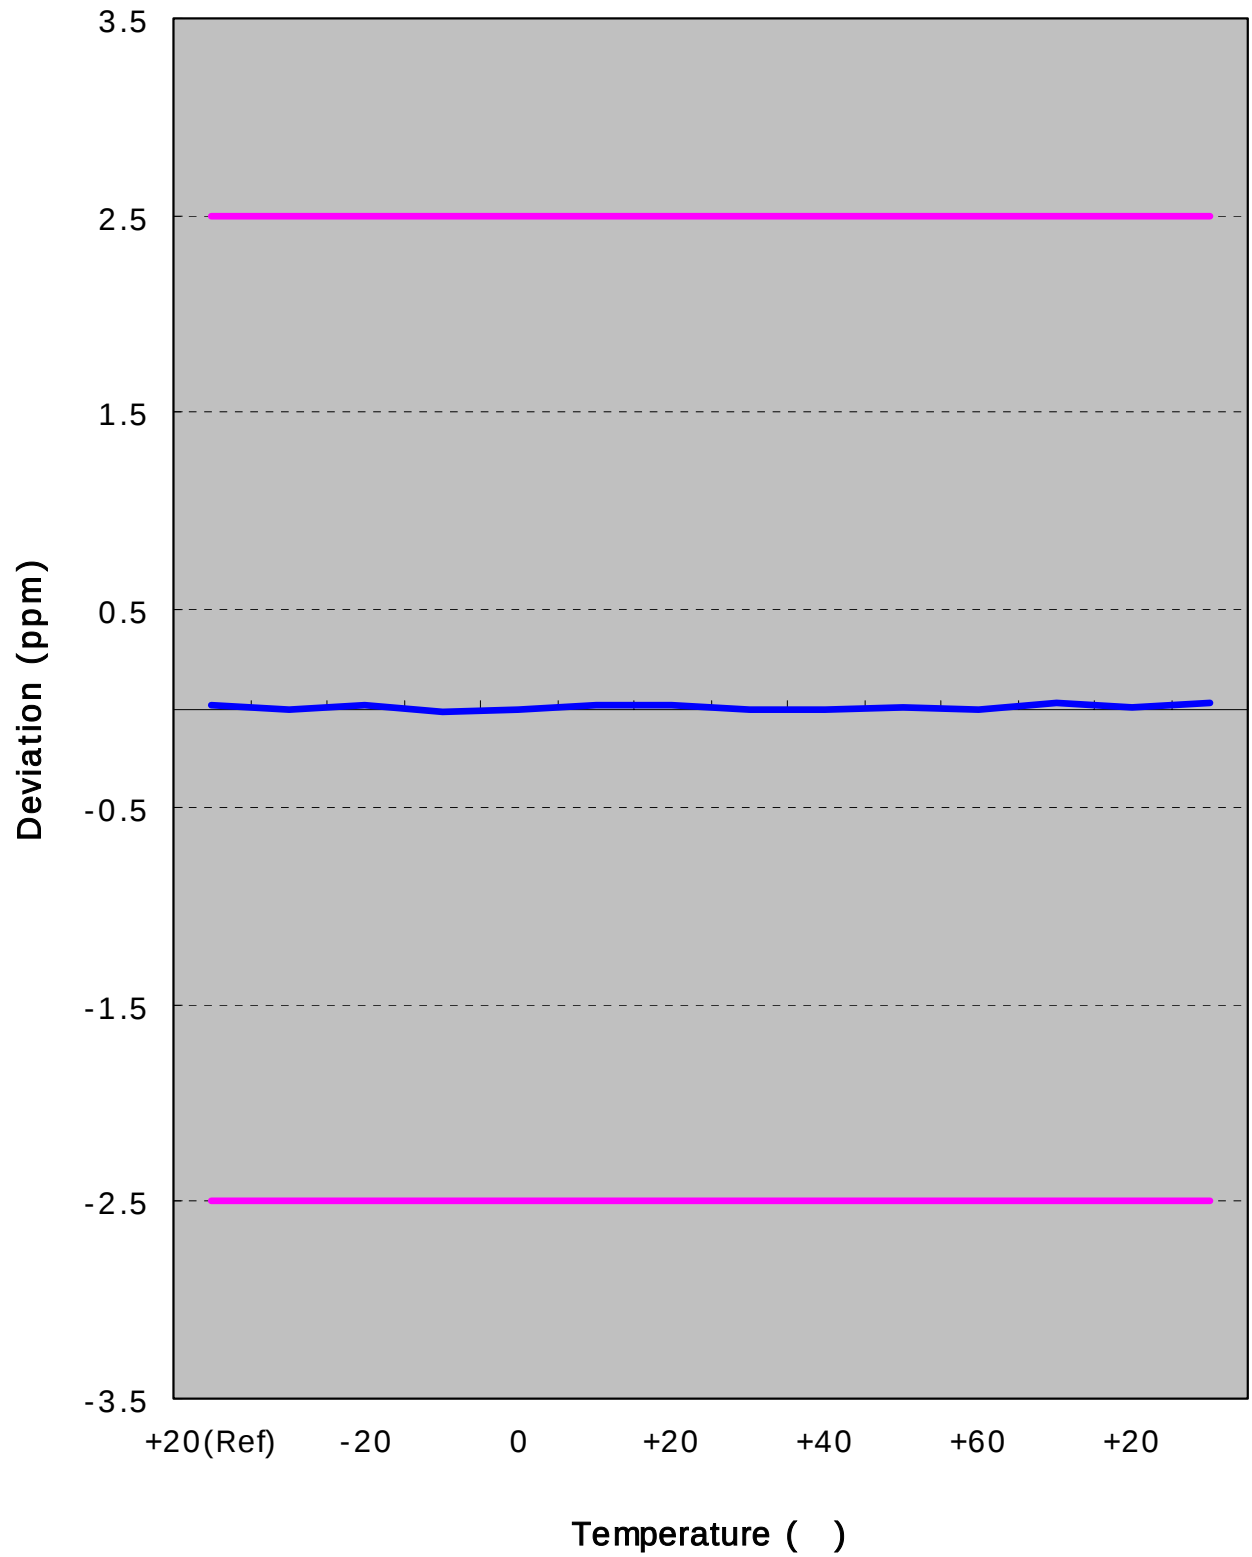



Zoom IN

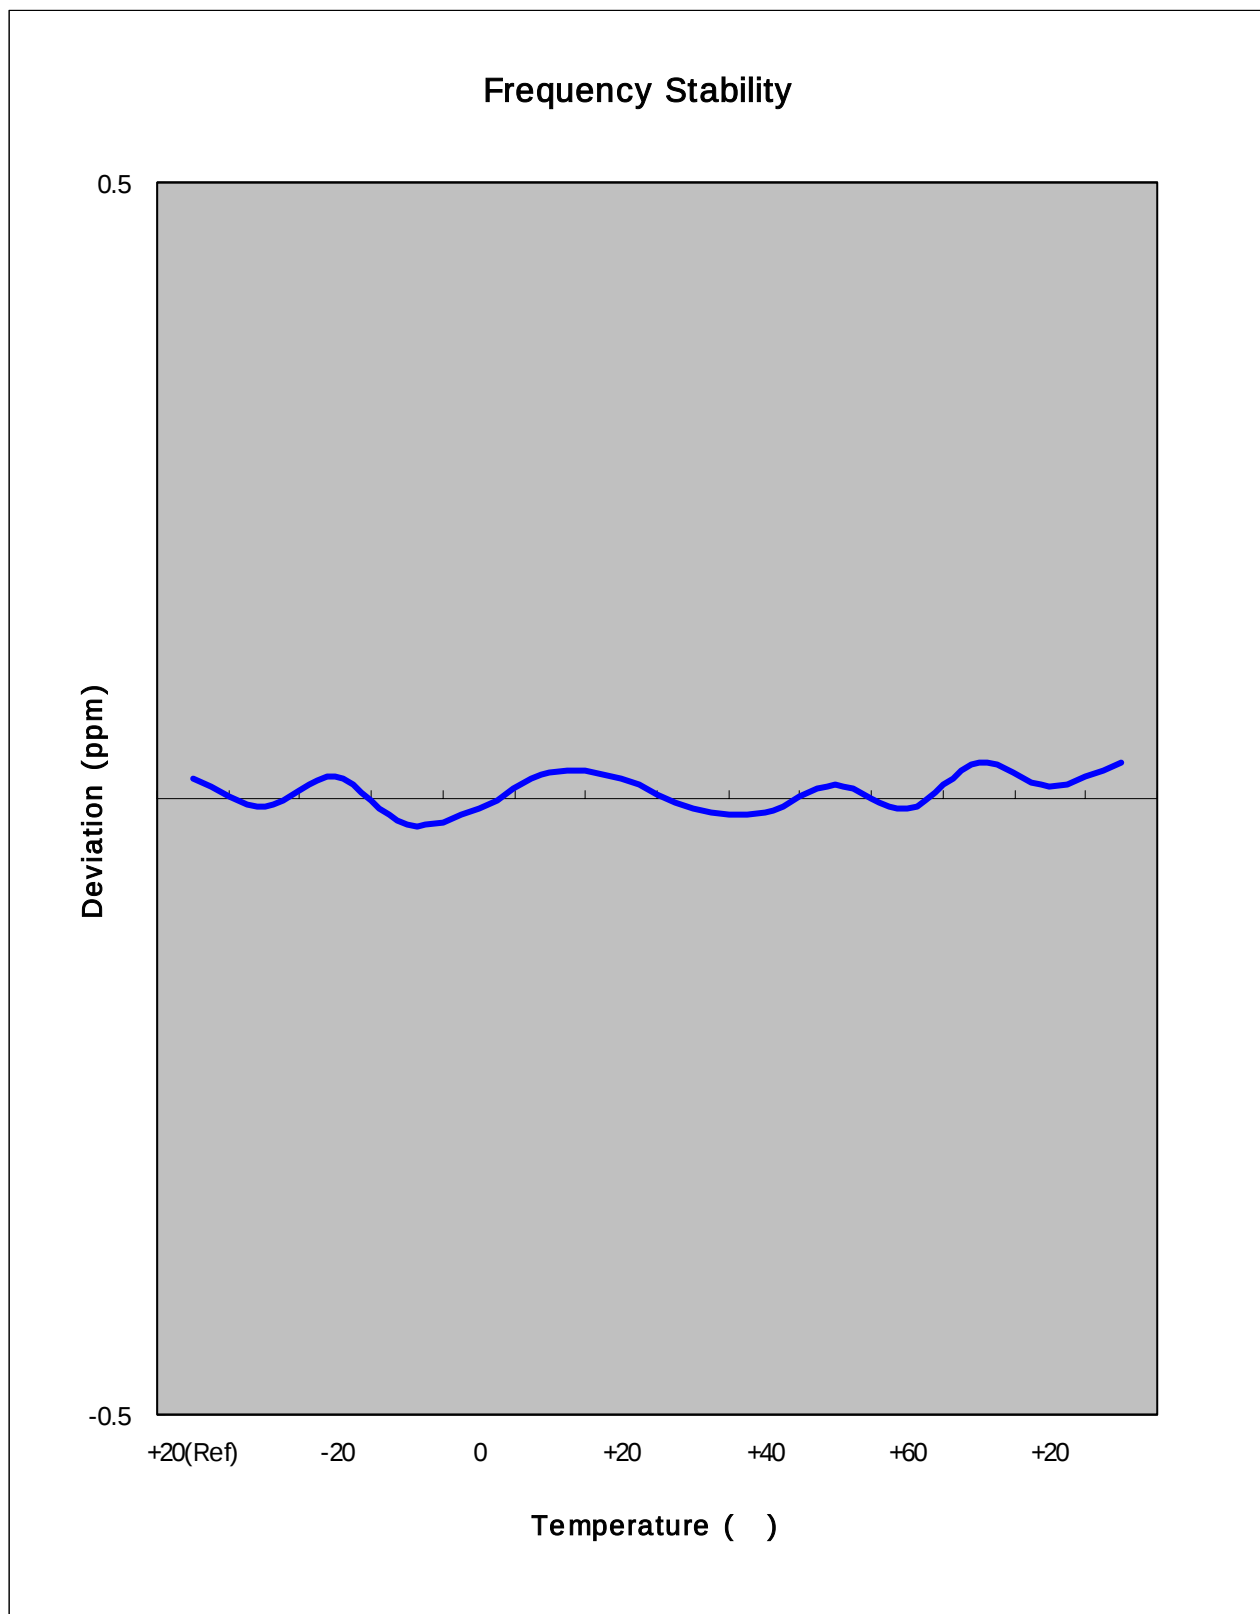



7. CONCLUSION

The data collected shows that the SAMSUNG Single-Band PCS GSM/EDGE Phone with Bluetooth. FCC ID : A3LSGHG618 complies with all the requirements of Parts 2,24 of the FCC Rules.

8. TEST PLOTS



GSM1900




Agilent

R T

Freq/Channel

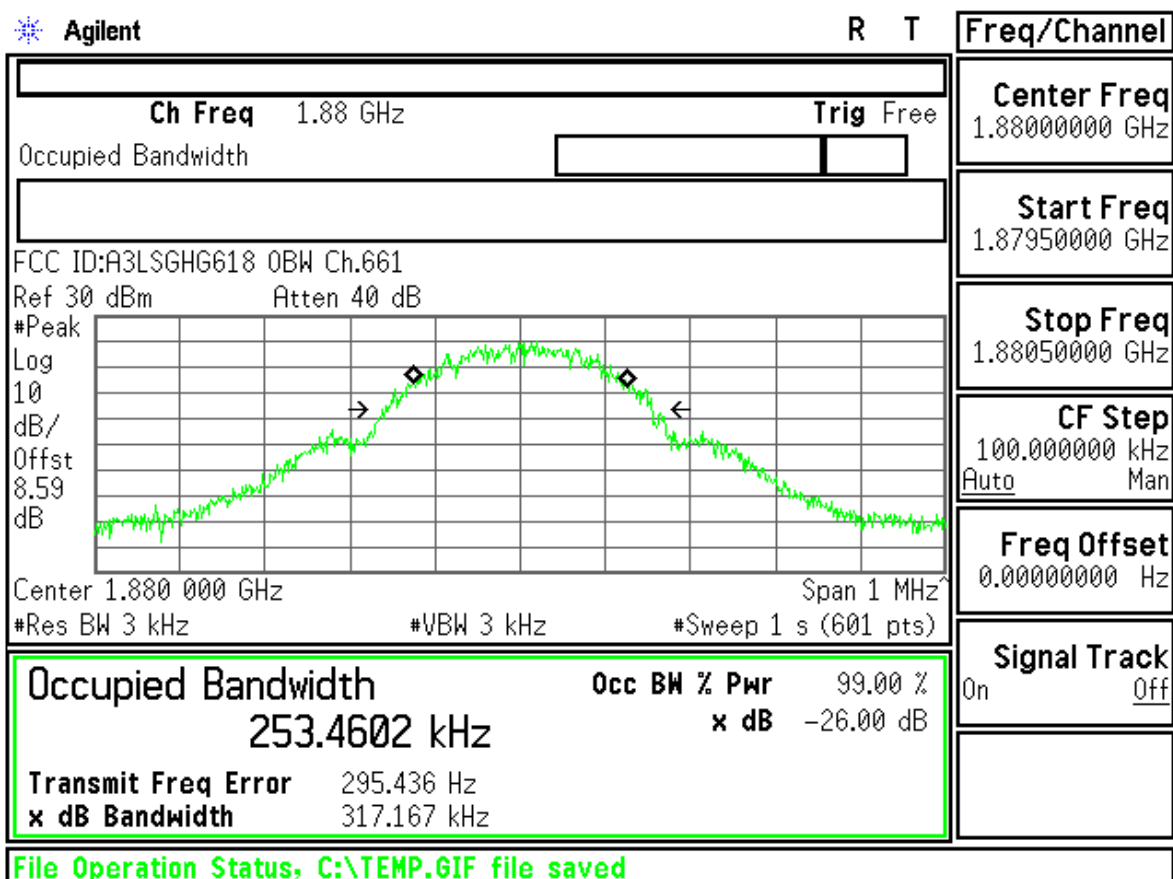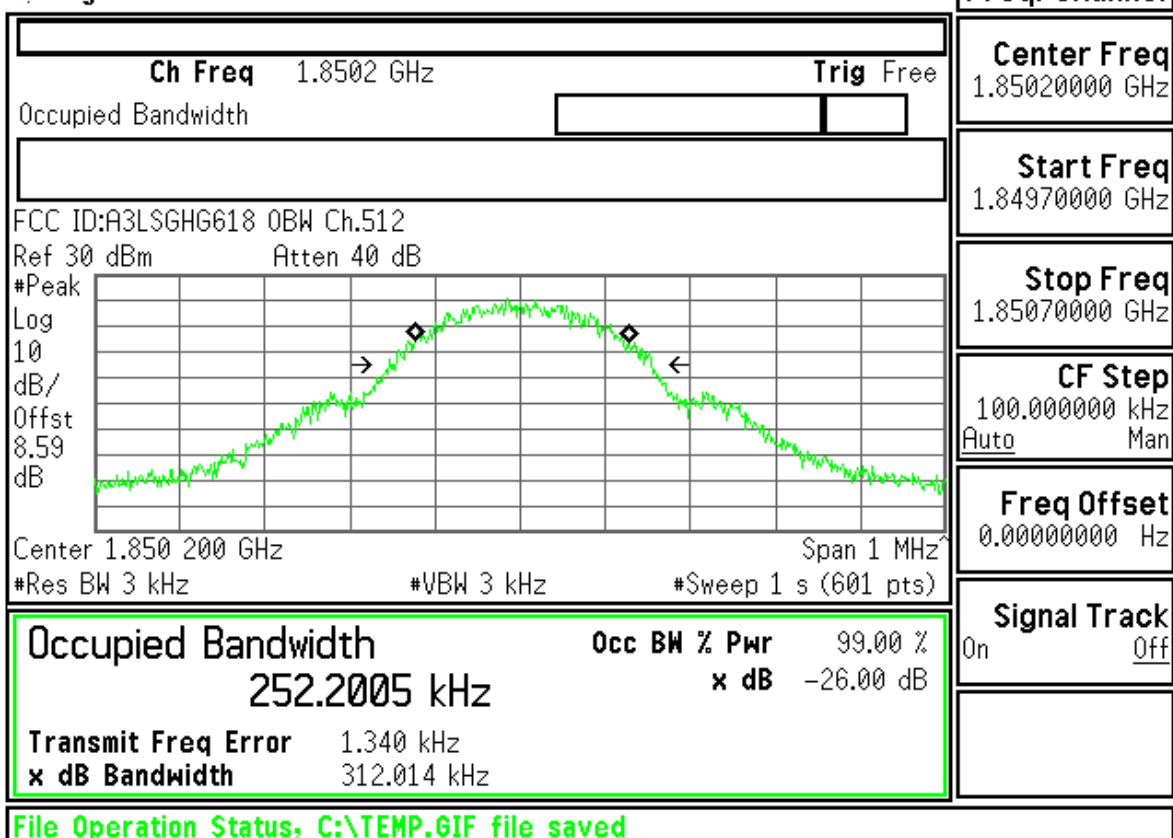

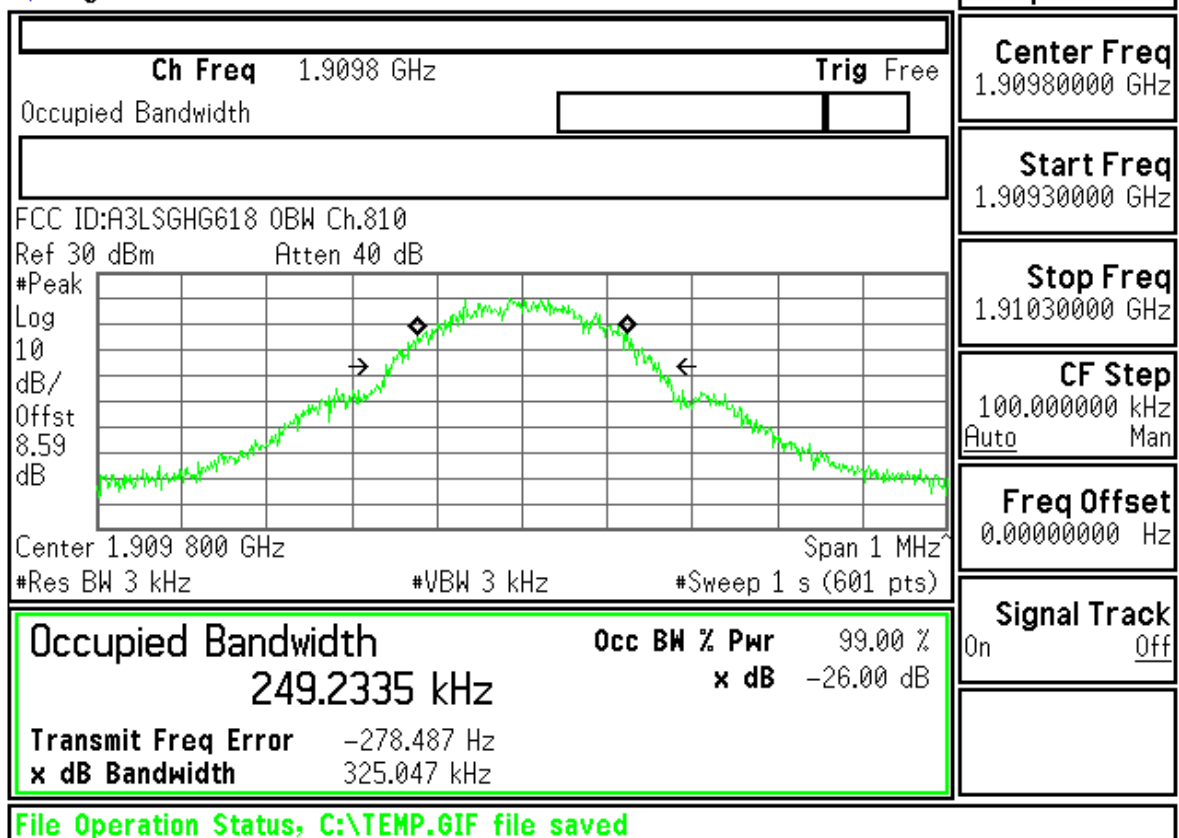

FCC ID : A3LSGHG618 Transmit Power 512CH



Measurement/Instrument Screen																																				
Control		Transmit Power									TCH Parms																									
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.33</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.33</td><td>----</td><td>----</td><td>----</td></tr></table>										Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.33	----	----	----	Estimated Carrier Power	29.33	----	----	----	Downlink Traffic Power ▾										
												Burst 1	Burst 2	Burst 3	Burst 4																					
											Burst Power	29.33	----	----	----																					
											Estimated Carrier Power	29.33	----	----	----																					
		Traffic Band																																		
PCS																																				
Swap Window Positions		<table><tr><td colspan="4">Phase & Frequency Error</td></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.92</td><td>1.70</td><td>-53.05</td></tr><tr><td>Maximum</td><td>7.01</td><td>2.25</td><td>24.83</td></tr><tr><td>Average</td><td>5.26</td><td>1.93</td><td>-3.58</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.92	1.70	-53.05	Maximum	7.01	2.25	24.83	Average	5.26	1.93	-3.58	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
											Phase & Frequency Error																									
												Peak Phase °	RMS Phase °	Frequency Hz																						
											Minimum	3.92	1.70	-53.05																						
		Maximum	7.01	2.25	24.83																															
Average	5.26	1.93	-3.58																																	
Pass/Fail	Pass	Pass	Pass																																	
512																																				
Single																																				
		<table><tr><td colspan="4">Phase & Frequency Error</td></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.92</td><td>1.70</td><td>-53.05</td></tr><tr><td>Maximum</td><td>7.01</td><td>2.25</td><td>24.83</td></tr><tr><td>Average</td><td>5.26</td><td>1.93</td><td>-3.58</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.92	1.70	-53.05	Maximum	7.01	2.25	24.83	Average	5.26	1.93	-3.58	Pass/Fail	Pass	Pass	Pass	MS TX Level	
											Phase & Frequency Error																									
												Peak Phase °	RMS Phase °	Frequency Hz																						
											Minimum	3.92	1.70	-53.05																						
		Maximum	7.01	2.25	24.83																															
Average	5.26	1.93	-3.58																																	
Pass/Fail	Pass	Pass	Pass																																	
0																																				
Channel Mode Setup ▾																																				
Return																																				
1 of 2		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td colspan="2"></td><td colspan="4"></td><td colspan="3"></td></tr></table>											Active Cell Connected				Sys Type: GSM												1 of 2							
		Active Cell Connected				Sys Type: GSM																														



001217432000018 Transmit Power Setup



Measurement/Instrument Screen																																	
Control		Transmit Power						TCH Parms																									
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.40</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.10</td><td>----</td><td>----</td><td>----</td></tr></table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.40	----	----	----	Estimated Carrier Power	29.10	----	----	----	Downlink Traffic Power										
	Burst 1							Burst 2	Burst 3	Burst 4																							
Burst Power	29.40							----	----	----																							
Estimated Carrier Power	29.10							----	----	----																							
Swap Window Positions		Traffic Band																															
		PCS																															
		Traffic Channel																															
		661																															
1 of 2		<table><tr><th colspan="4">Phase & Frequency Error</th></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.92</td><td>1.62</td><td>-39.20</td></tr><tr><td>Maximum</td><td>6.62</td><td>2.16</td><td>-2.07</td></tr><tr><td>Average</td><td>4.98</td><td>1.86</td><td>-20.91</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>						Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.92	1.62	-39.20	Maximum	6.62	2.16	-2.07	Average	4.98	1.86	-20.91	Pass/Fail	Pass	Pass	Pass	MS TX Level	
								Phase & Frequency Error																									
									Peak Phase °	RMS Phase °	Frequency Hz																						
								Minimum	3.92	1.62	-39.20																						
Maximum	6.62	2.16	-2.07																														
Average	4.98	1.86	-20.91																														
Pass/Fail	Pass	Pass	Pass																														
		50 / 50 Single						0																									
		Active Cell Connected						Sys Type: GSM																									
								Channel Mode Setup																									
								Return																									
		IntRef Offset R T						1 of 2																									



00101743E0000010 Transmit Power 010001

Measurement/Instrument Screen																															
Control		Transmit Power						TCH Parms																							
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.15</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.15</td><td>----</td><td>----</td><td>----</td></tr></table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.15	----	----	----	Estimated Carrier Power	29.15	----	----	----	Downlink Traffic Power								
	Burst 1							Burst 2	Burst 3	Burst 4																					
Burst Power	29.15							----	----	----																					
Estimated Carrier Power	29.15							----	----	----																					
		Traffic Band																													
		PCS																													
		Traffic Channel																													
		Single						810																							
Phase & Frequency Error																															
Swap Window Positions		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.97</td><td>1.59</td><td>-31.38</td></tr><tr><td>Maximum</td><td>6.46</td><td>2.20</td><td>3.68</td></tr><tr><td>Average</td><td>5.27</td><td>1.87</td><td>-13.20</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.97	1.59	-31.38	Maximum	6.46	2.20	3.68	Average	5.27	1.87	-13.20	Pass/Fail	Pass	Pass	Pass	MS TX Level	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	3.97	1.59	-31.38																		
										Maximum	6.46	2.20	3.68																		
										Average	5.27	1.87	-13.20																		
Pass/Fail	Pass	Pass	Pass																												
		0																													
		Channel Mode Setup																													
		50 / 50						Return																							
		Single																													
		Active Cell Connected				Sys Type: GSM																									
1 of 2						IntRef	Offset	R	T	1 of 2																					

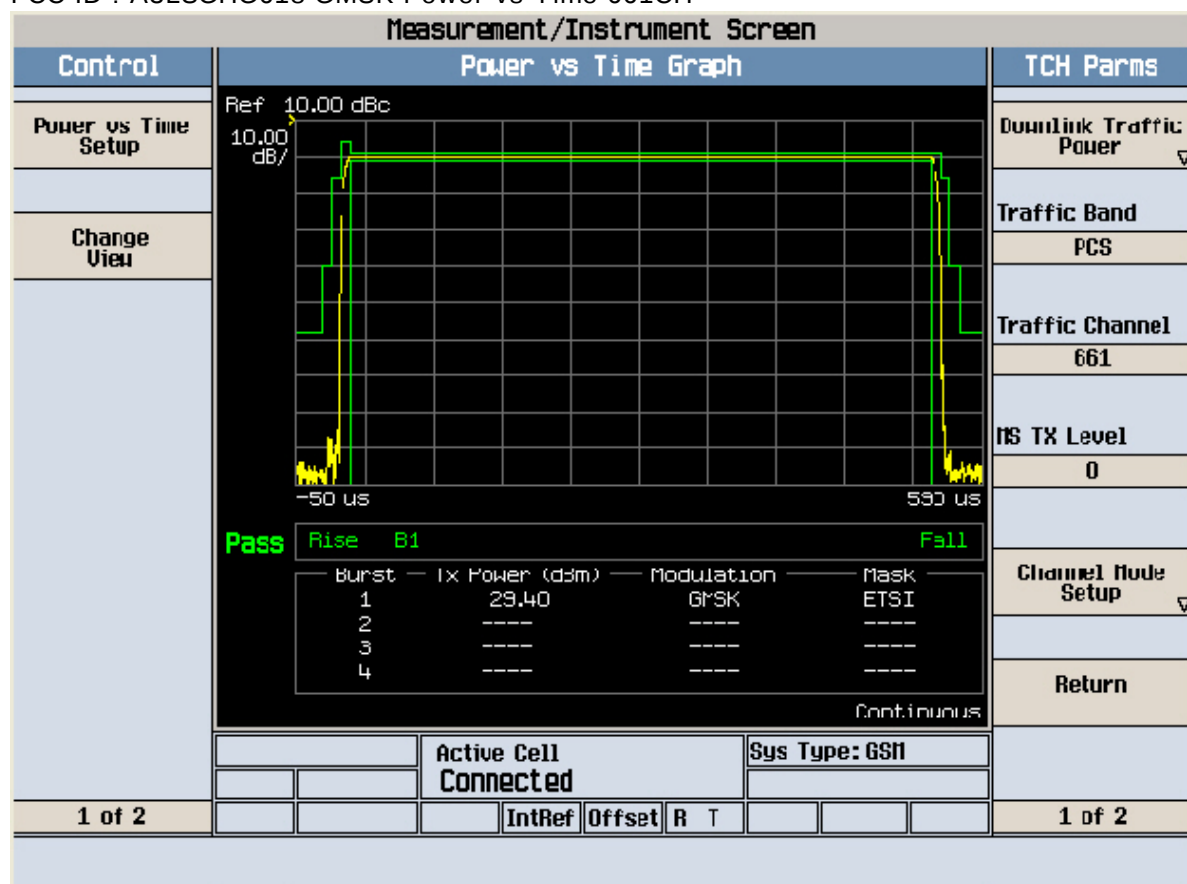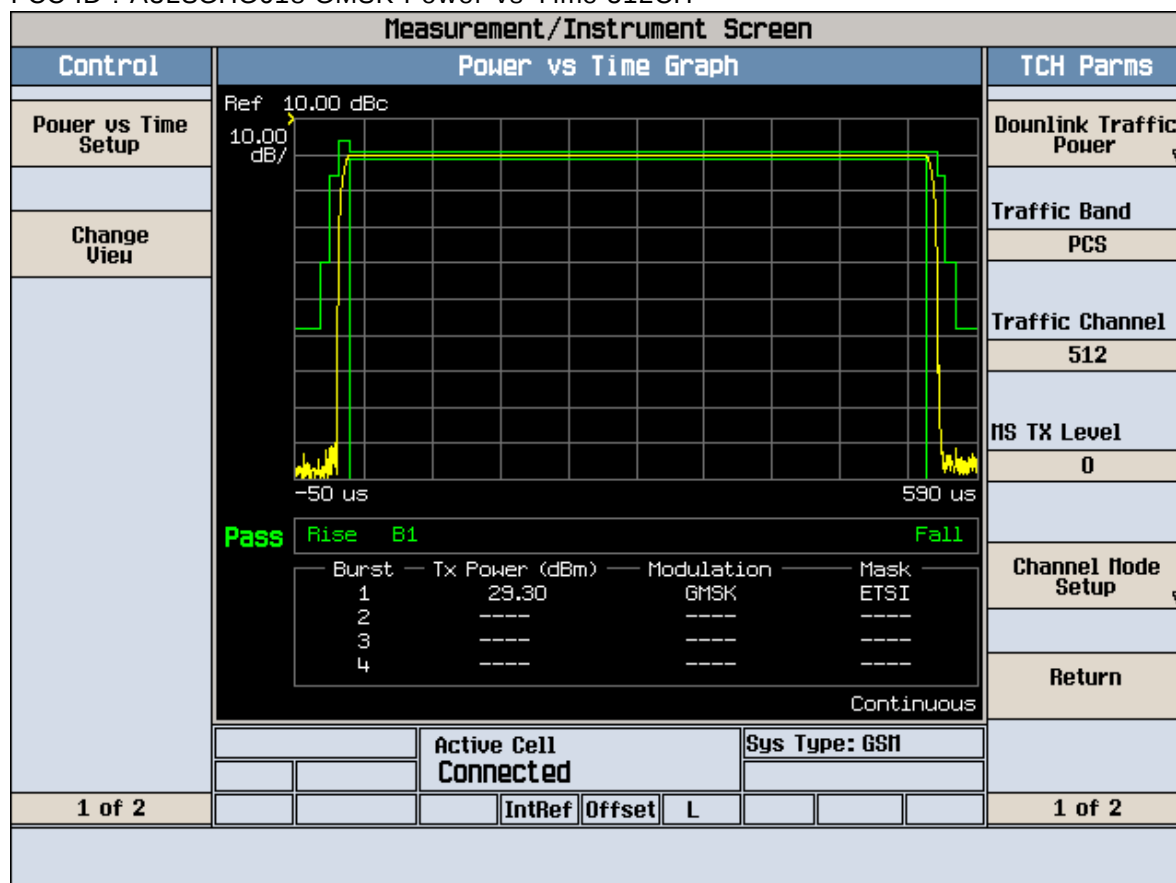

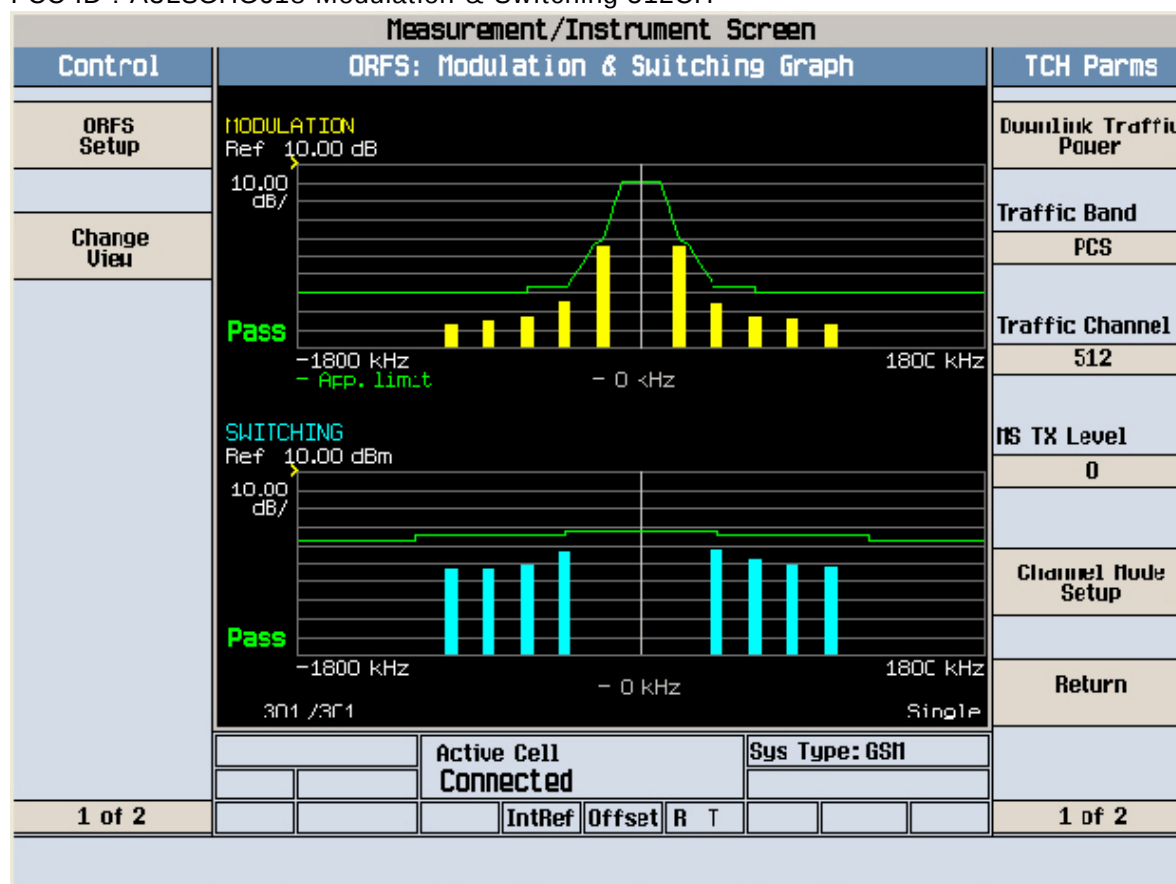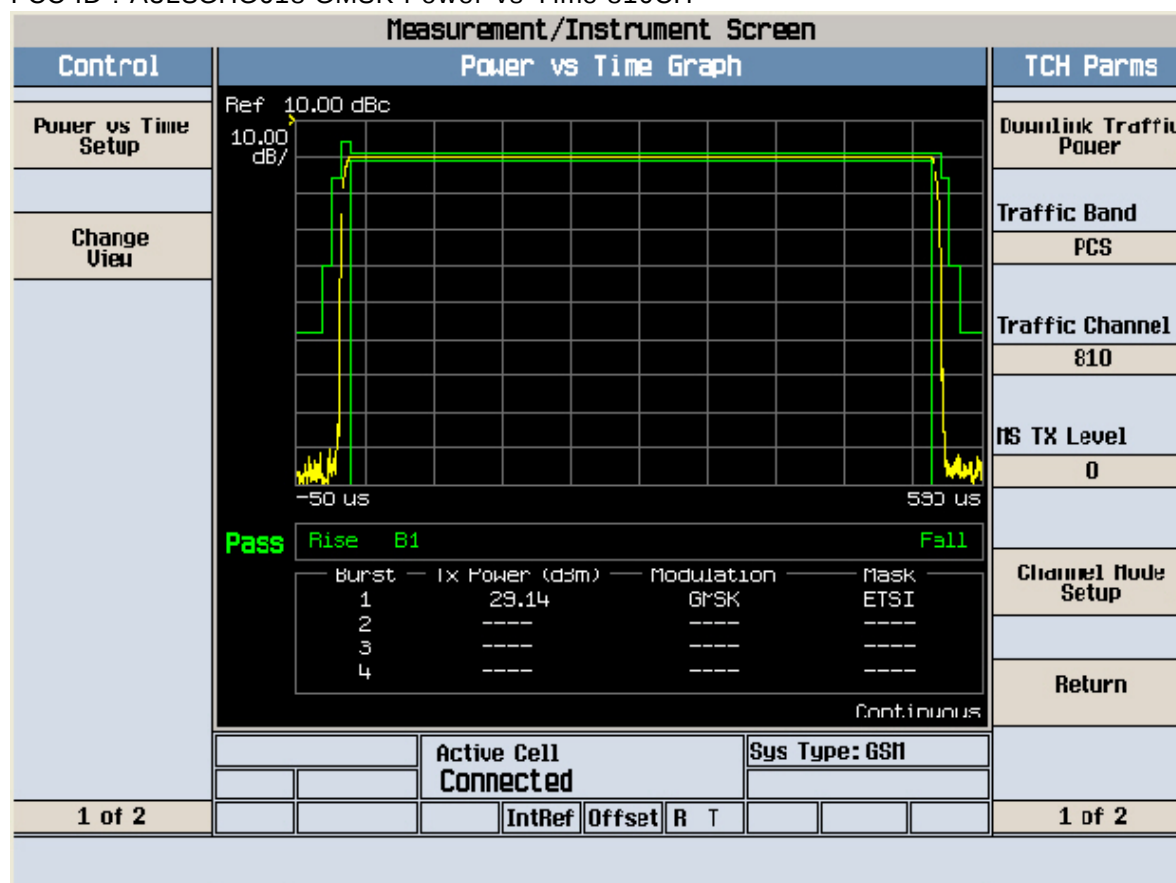

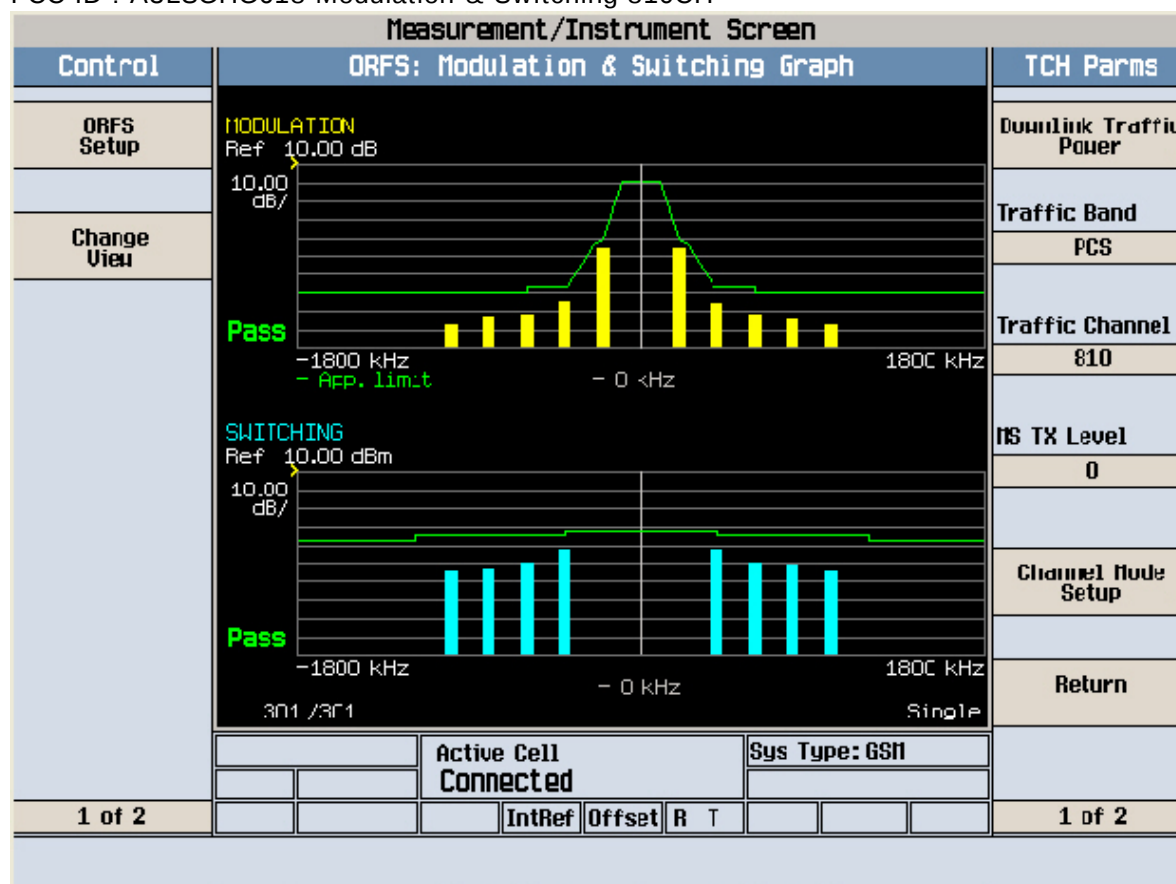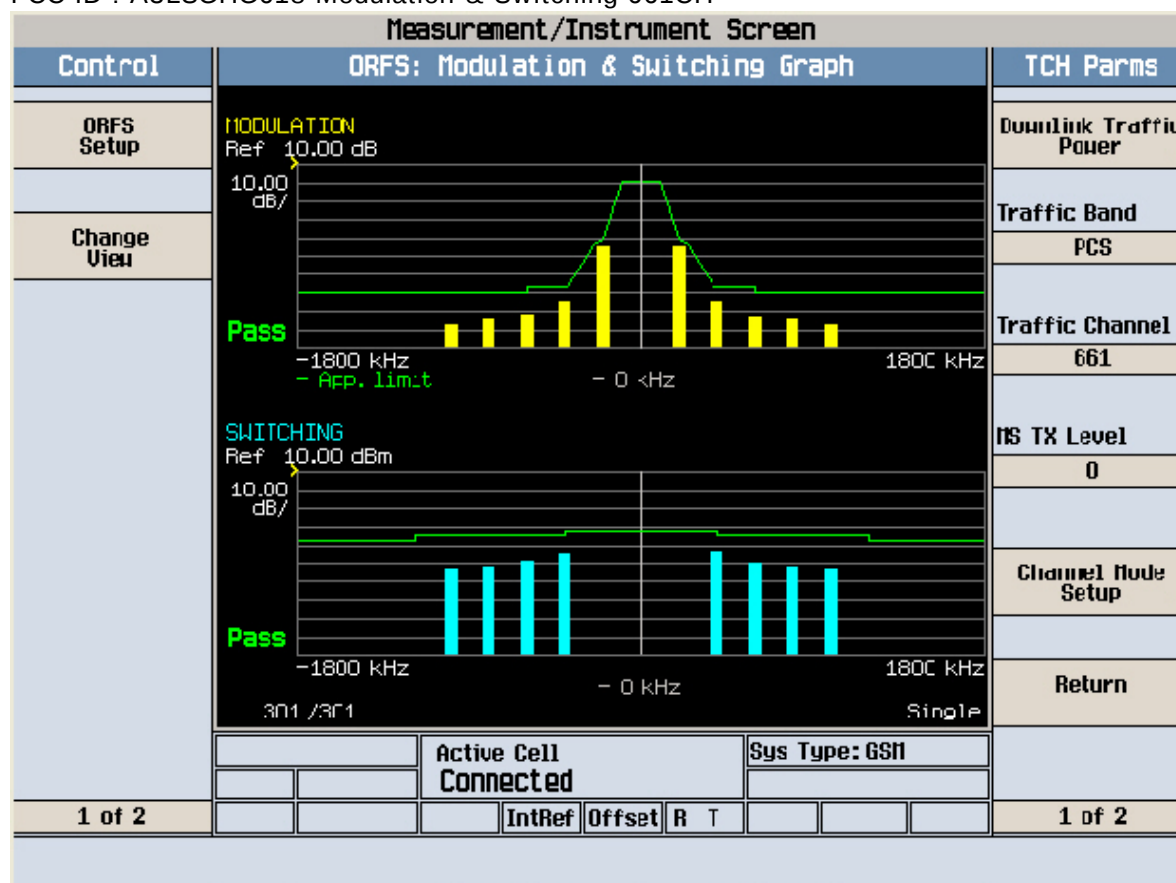


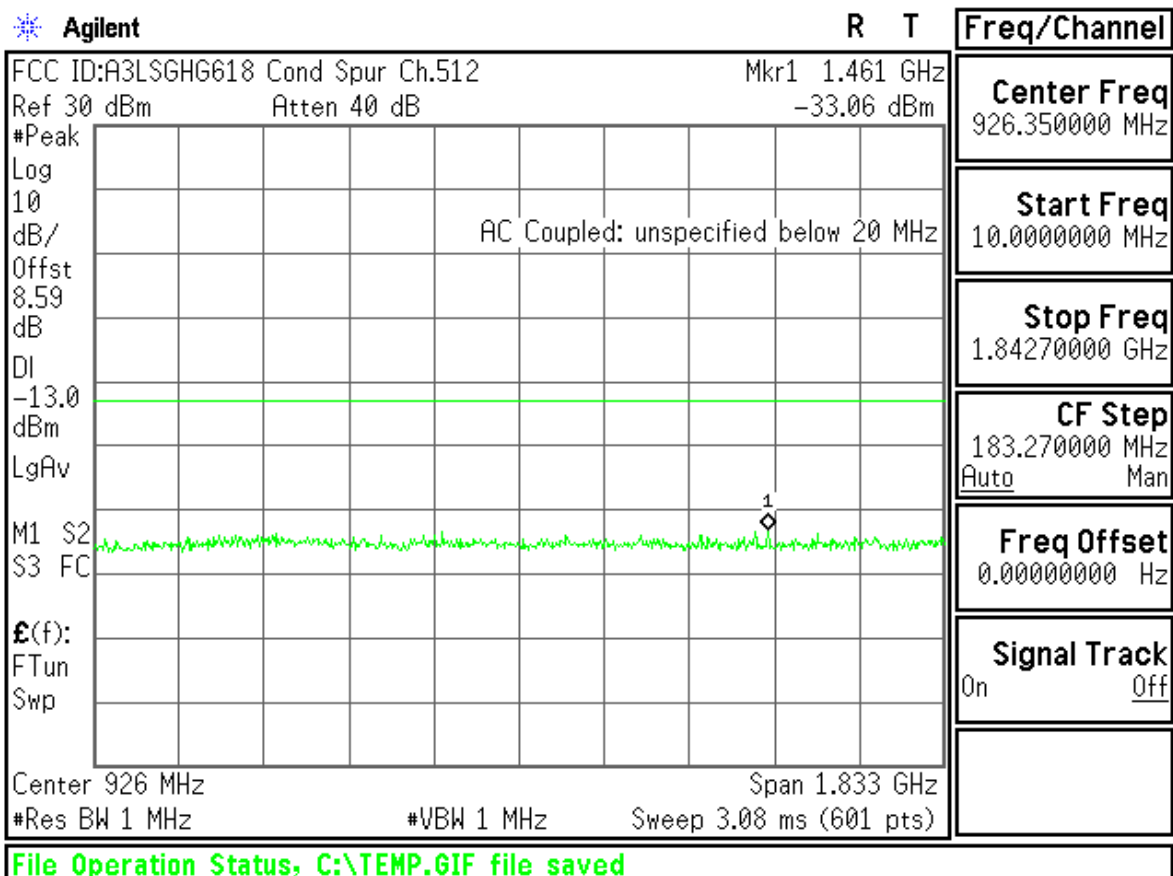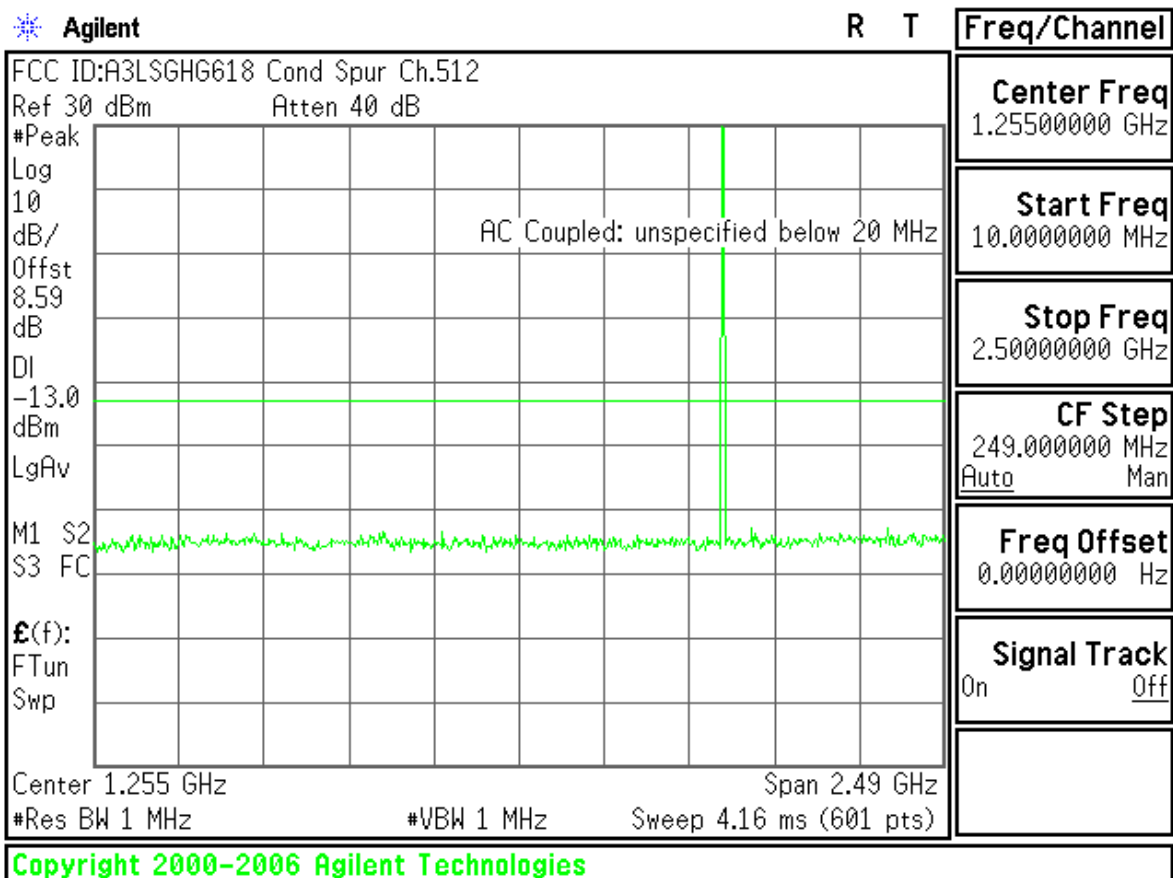

Agilent

R T

Freq/Channel

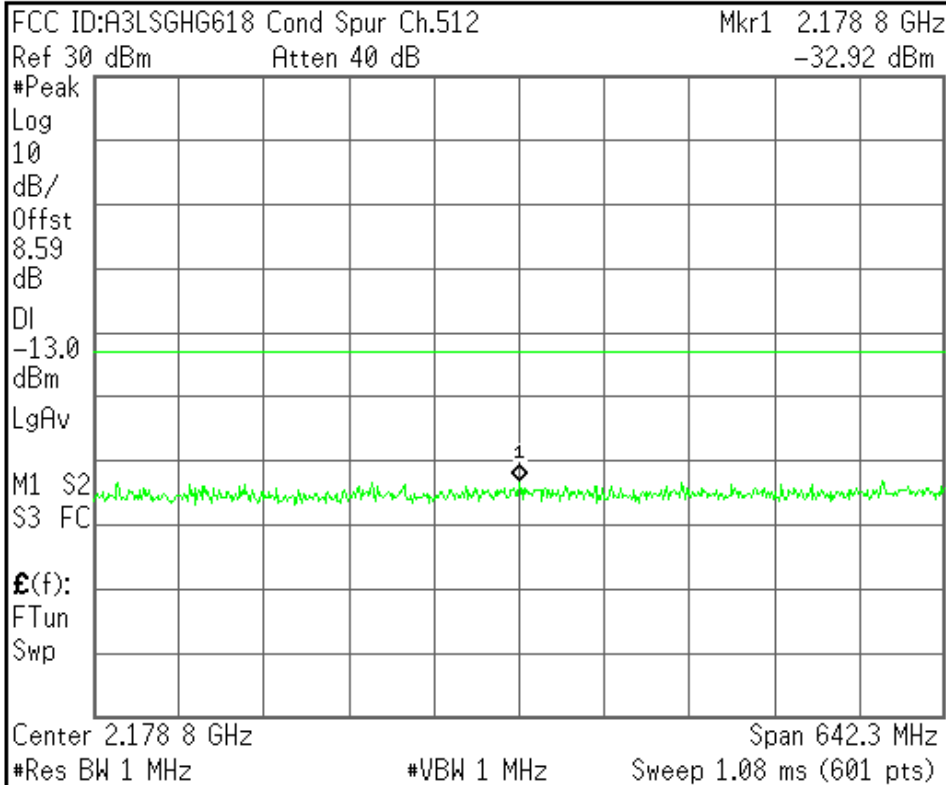

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

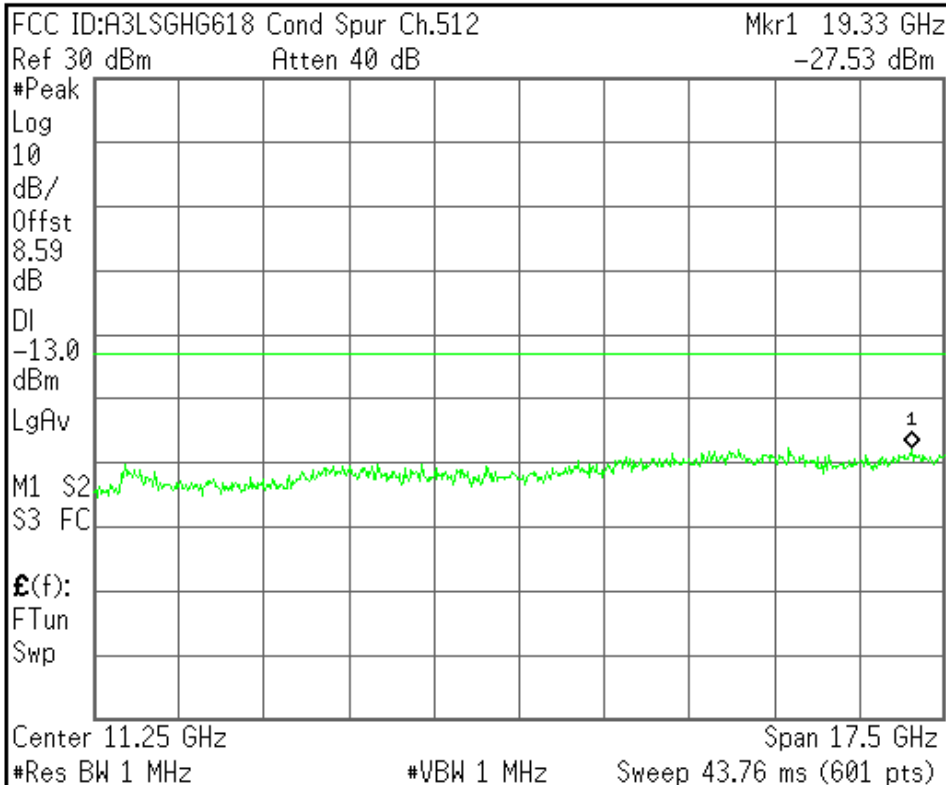

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Cond Spur Ch.661

Mkr1 131 MHz

Ref 30 dBm

Atten 40 dB

-33.29 dBm

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

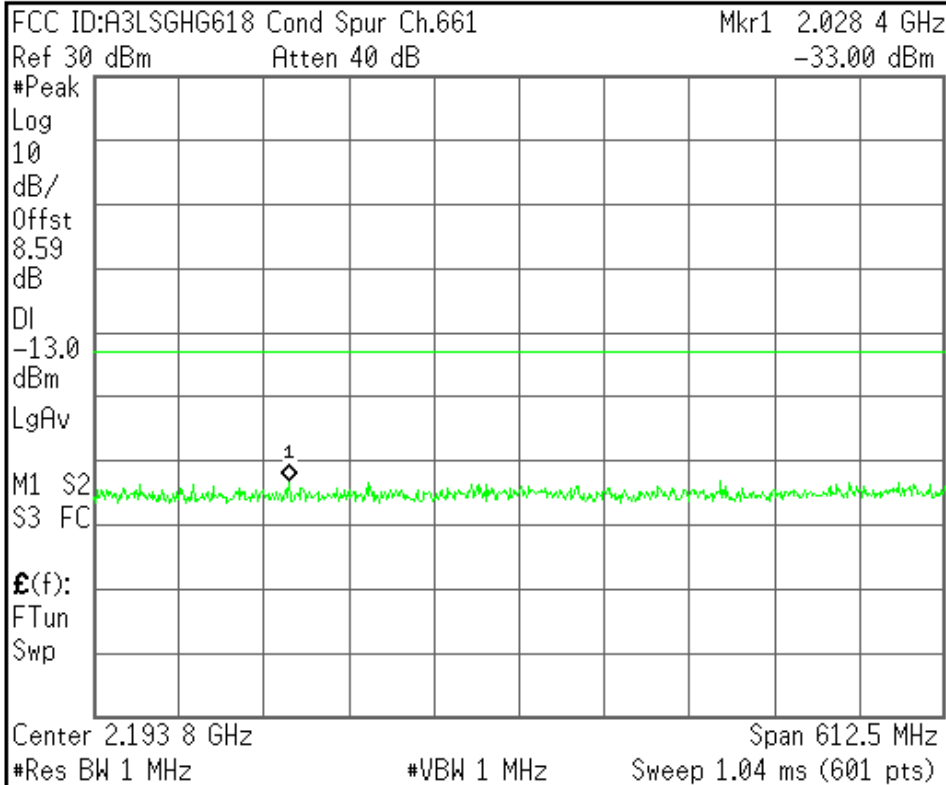

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

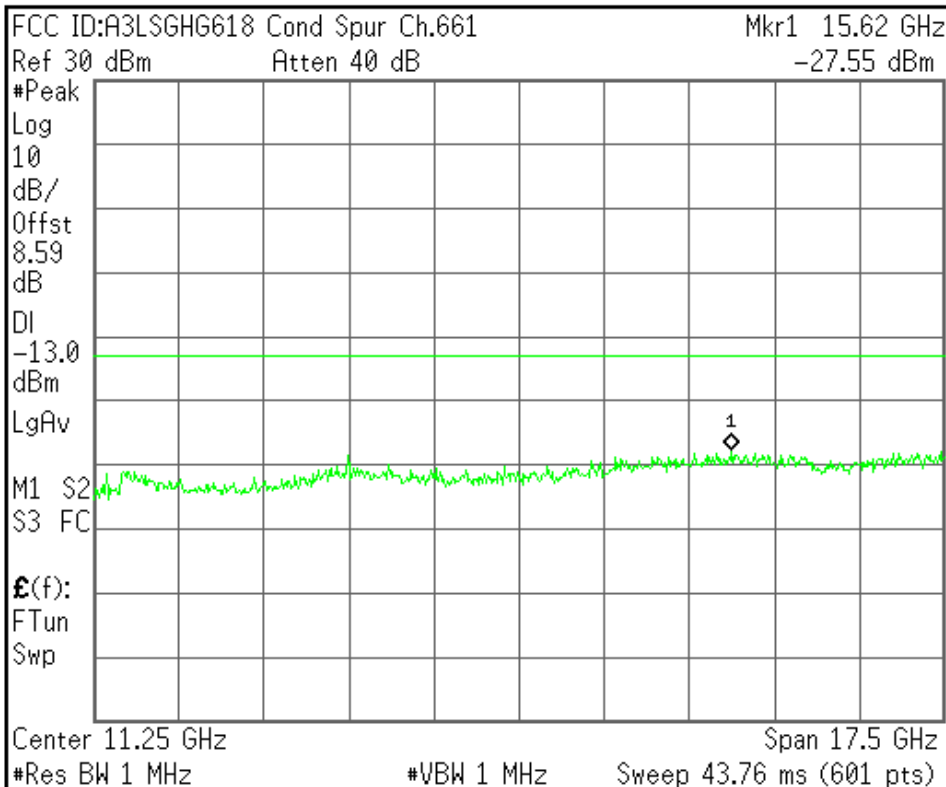

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Cond Spur Ch.810

Mkr1 1.265 GHz

Ref 30 dBm

Atten 40 dB

-33.30 dBm

#Peak

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz



Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

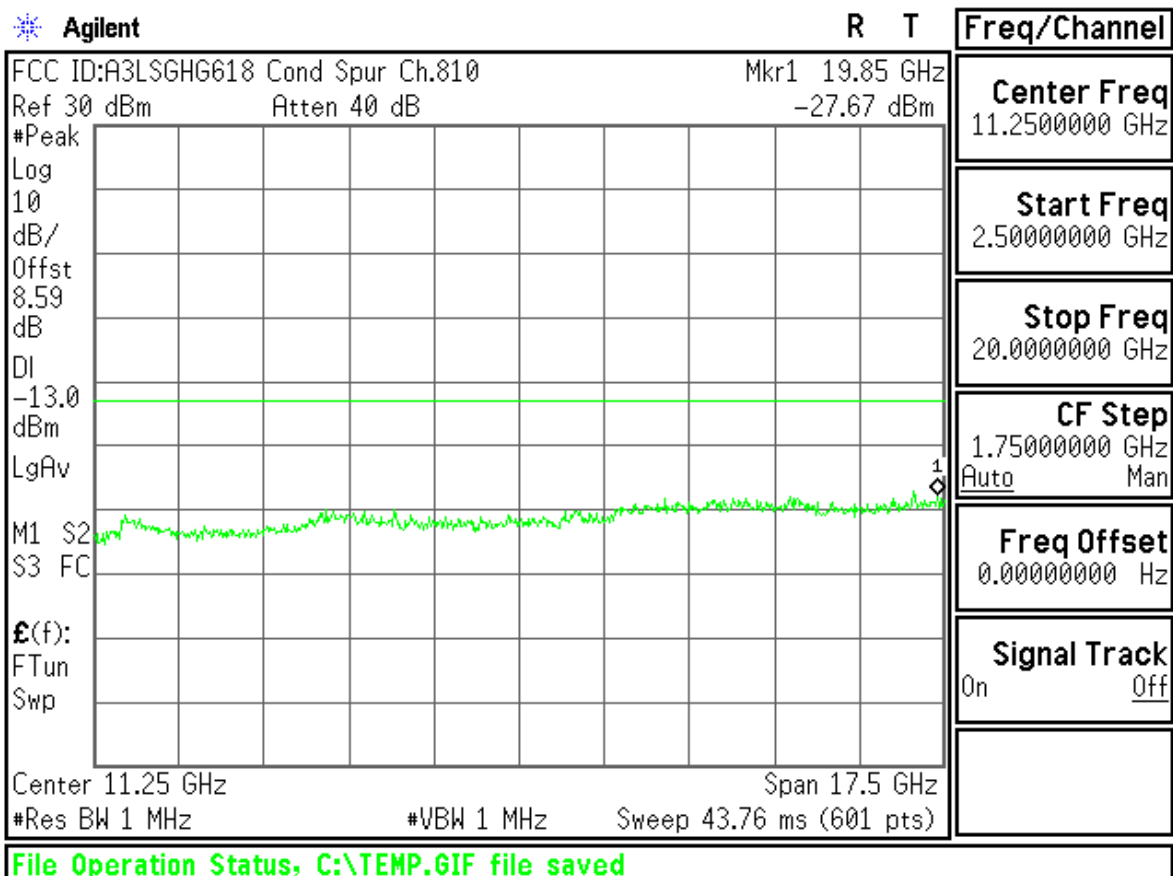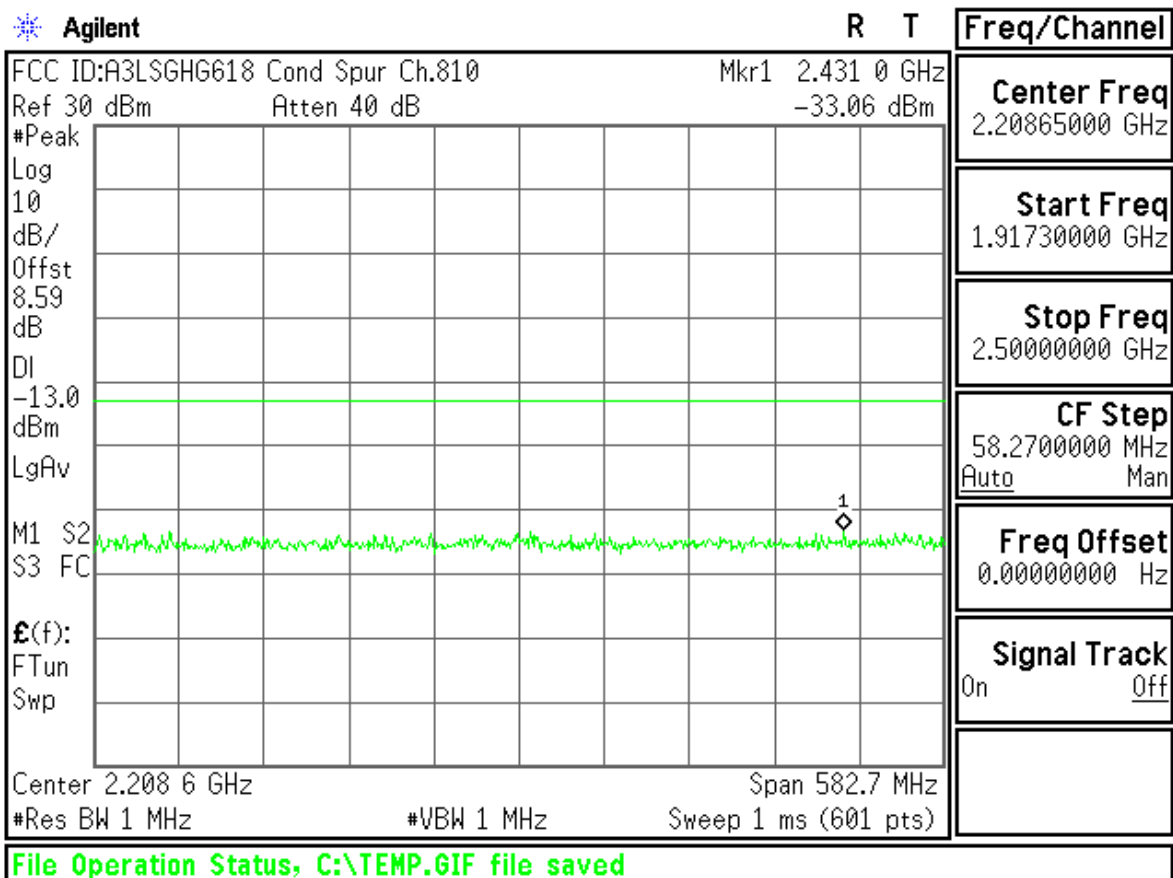

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

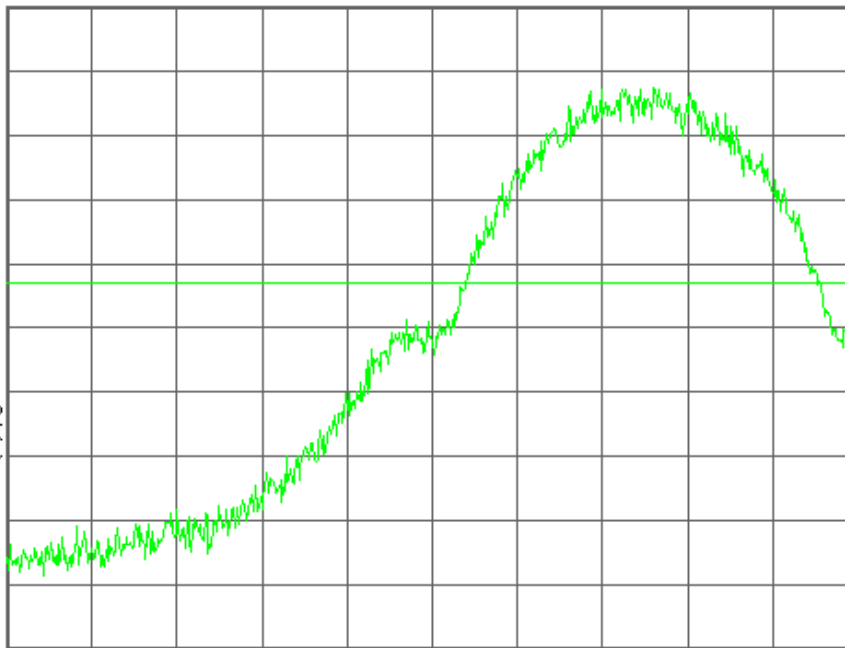

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Band Edge Ch.512

Mkr1 1.849 997 3 GHz

Ref 30 dBm

Atten 40 dB

-16.67 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

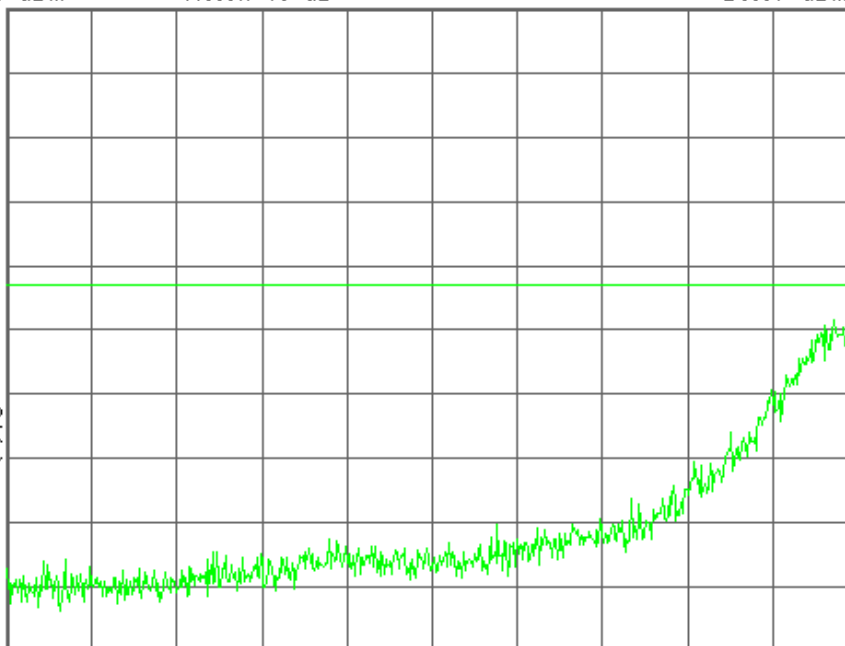

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSHG618 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

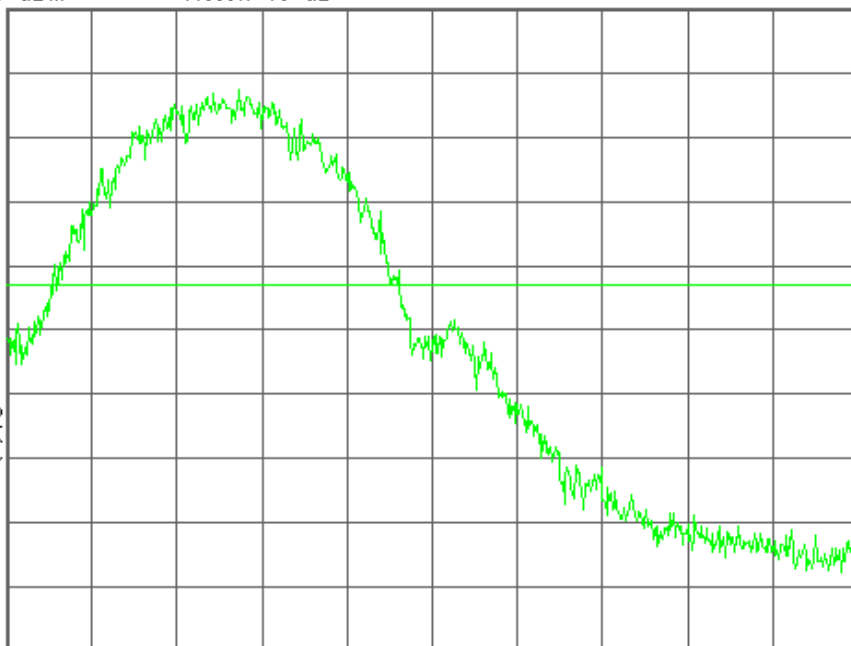

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSHG618 Band Edge Ch.810

Mkr1 1.910 016 2 GHz

Ref 30 dBm

Atten 40 dB

-17.58 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

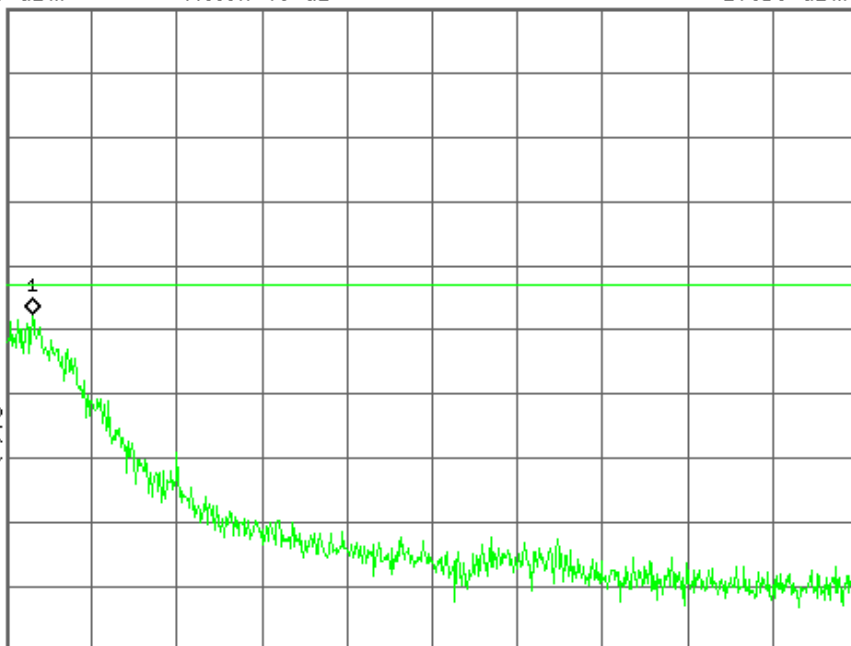

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz



CF Step
81.0000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE1900

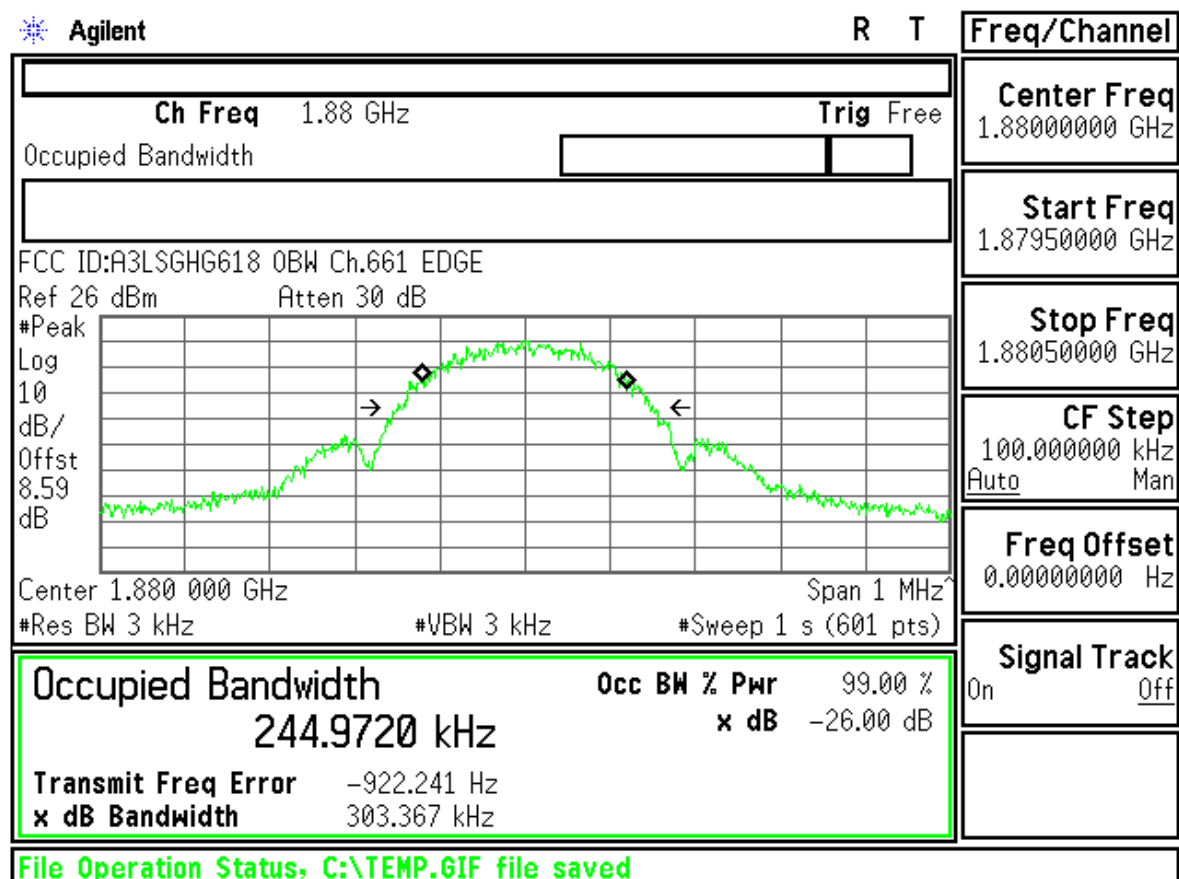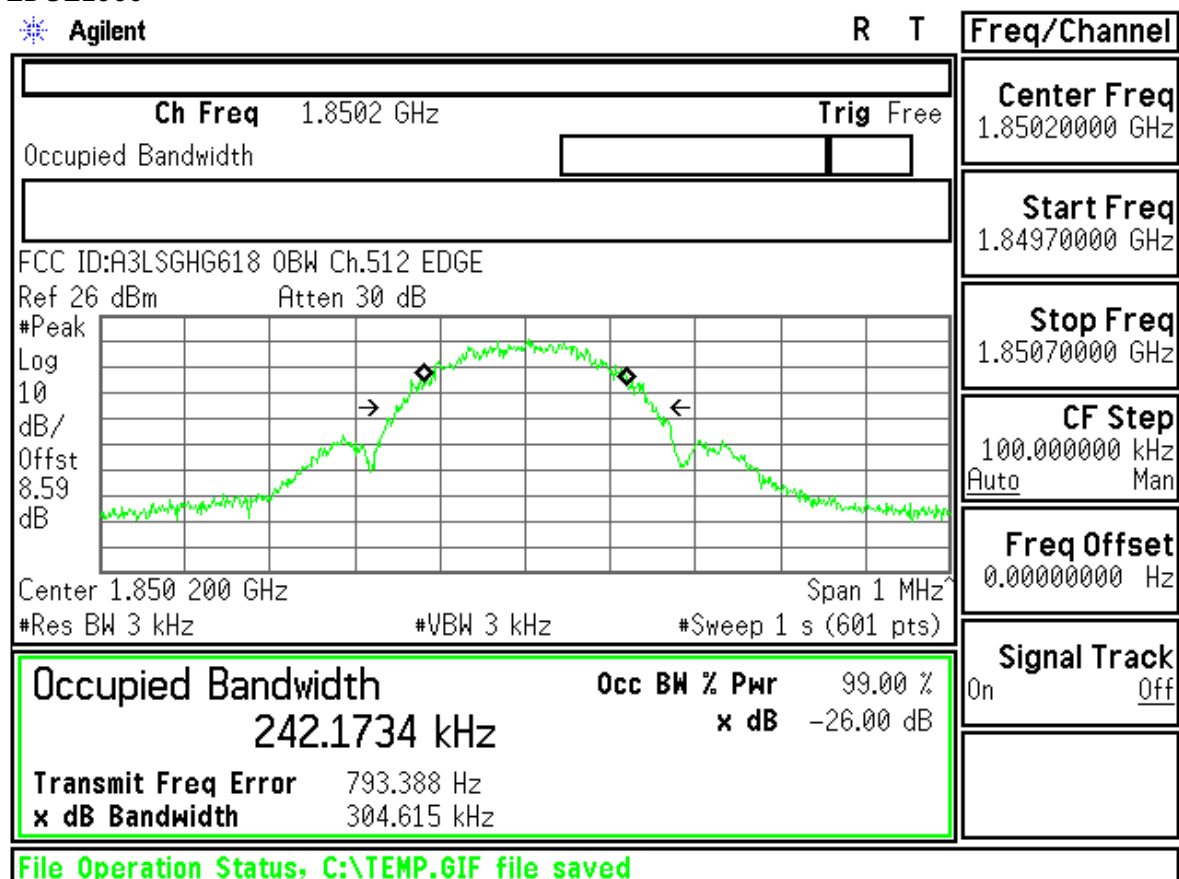

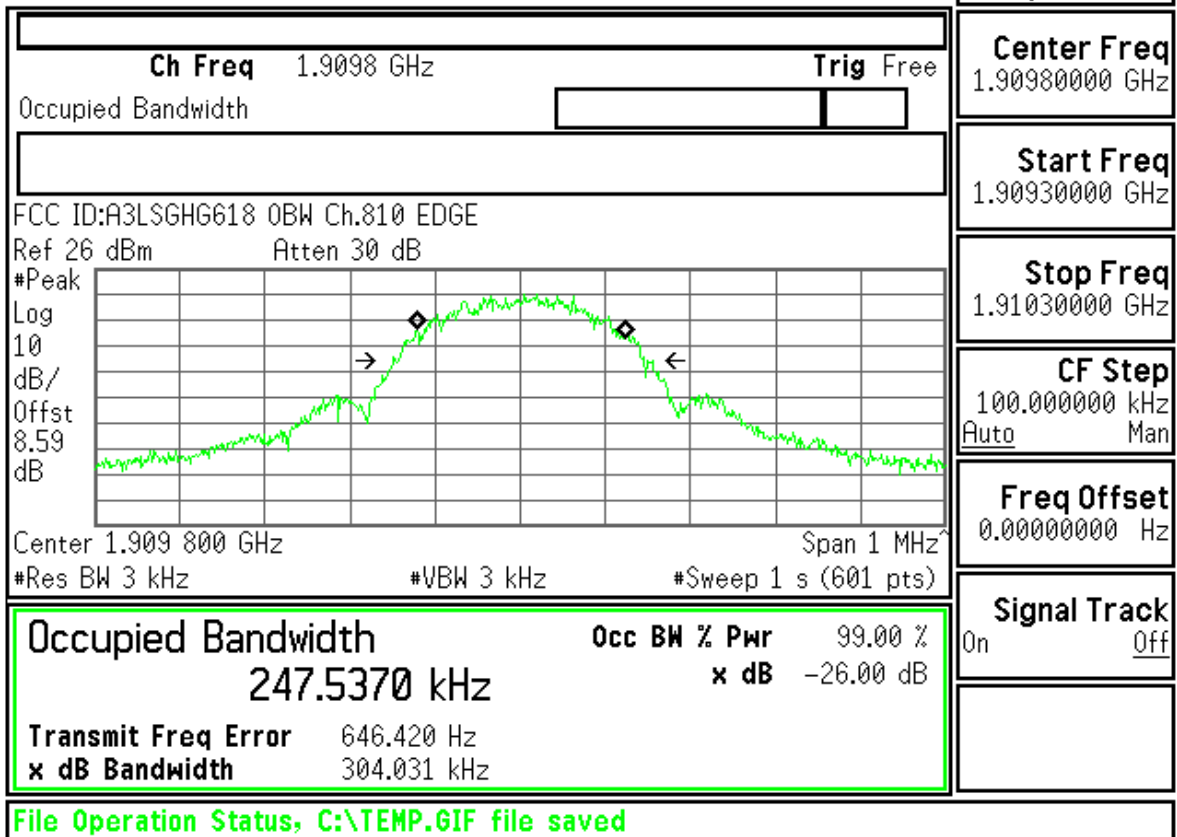

ID : A3LSGHG618 Transmit Power 512CH EDGE

Control	EGPRS Transmit Power								PDCH Params	
EGPRS Transmit Power Setup ▾	EPK Burst Power				EPK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum		Maximum		Minimum		Maximum		Traffic Band	
	23.54 dBm		24.98 dBm		24.32 dBm		24.43 dBm		PCS	
	Average		Std Dev		Average		Std Dev		Traffic Channel	
	24.29 dBm		0.26 dBm		24.36 dBm		0.02 dBm		512	
	200 /200				Single					
									HS TX Level ▾	
									Modulation Coding Scheme ▾	
									Return	
			Active Cell Transferring			Sys Type: EGPRS				
1 of 2				IntRef	Offset	R	T			1 of 2

Control	EGPRS Transmit Power								PDCH Parms			
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾			
	Minimum		Maximum		Minimum		Maximum		Traffic Band			
	24.42 dBm		26.05 dBm		25.15 dBm		25.35 dBm		PCS			
	Average		Std Dev		Average		Std Dev		Traffic Channel			
	25.15 dBm		0.27 dBm		25.20 dBm		0.04 dBm		661			
	200 /200				Single							
									HS TX Level ▾			
									Modulation Coding Scheme ▾			
									Return			
			Active Cell Transferring				Sys Type: EGPRS					
1 of 2				IntRef	Offset	R	T				1 of 2	

Control	EGPRS Transmit Power								PD TCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum		Maximum		Minimum		Maximum		Traffic Band	
	24.22 dBm		25.52 dBm		24.85 dBm		24.99 dBm		PCS	
	Average		Std Dev		Average		Std Dev		Traffic Channel	
	24.80 dBm		0.24 dBm		24.88 dBm		0.03 dBm		810	
	200 /200				Single					
									HS TX Level ▾	
									Modulation Coding Scheme ▾	
								Return		
		Active Cell Transferring				Sys Type: EGPRS				
1 of 2				IntRef	Offset	R	T			1 of 2

Agilent

R L

Freq/Channel

FCC ID:A3LSGHG618 Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

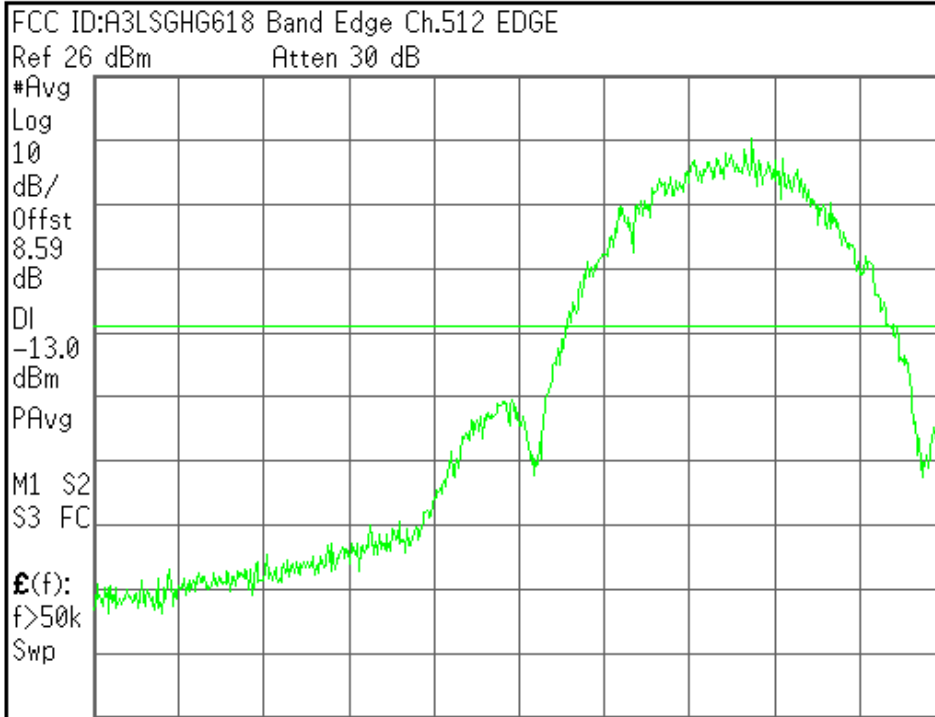

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHG618 Band Edge Ch.512 EDGE

Mkr1 1.849 982 6 GHz

Ref 26 dBm

Atten 30 dB

-23.96 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

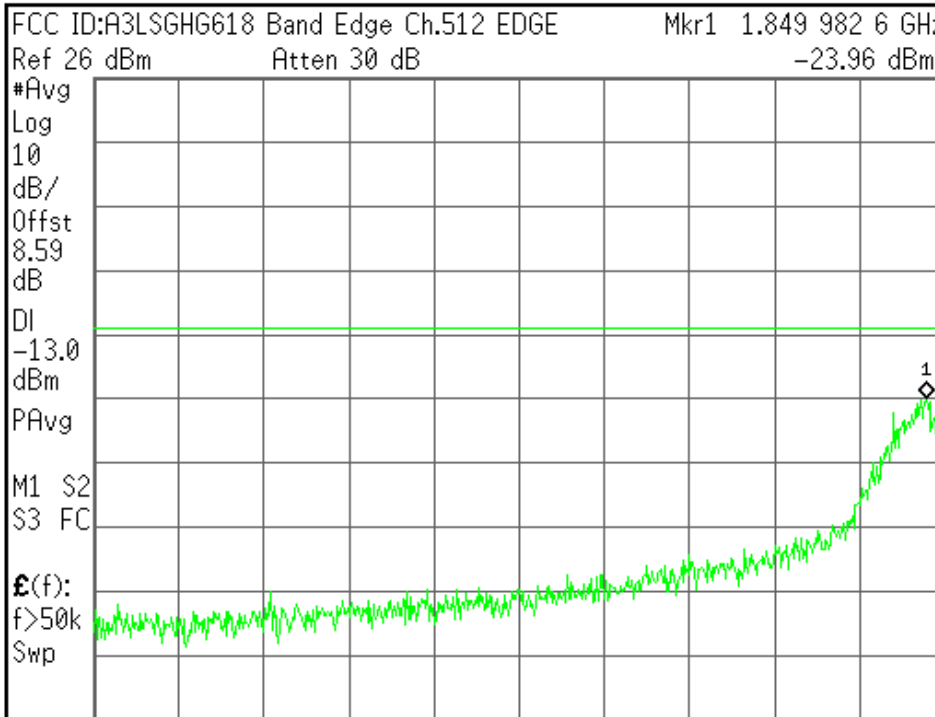

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSHG618 Band Edge Ch.810 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

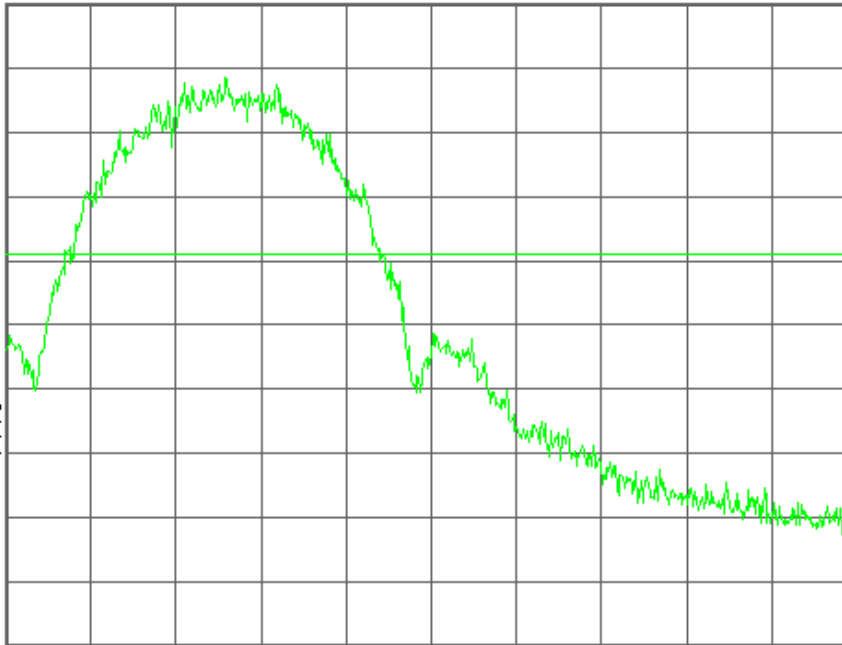

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSHG618 Band Edge Ch.810 EDGE

Mkr1 1.910 019 0 GHz

Ref 26 dBm

Atten 30 dB

-25.28 dBm

#Avg

Log

10

dB/

Offst

8.59

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

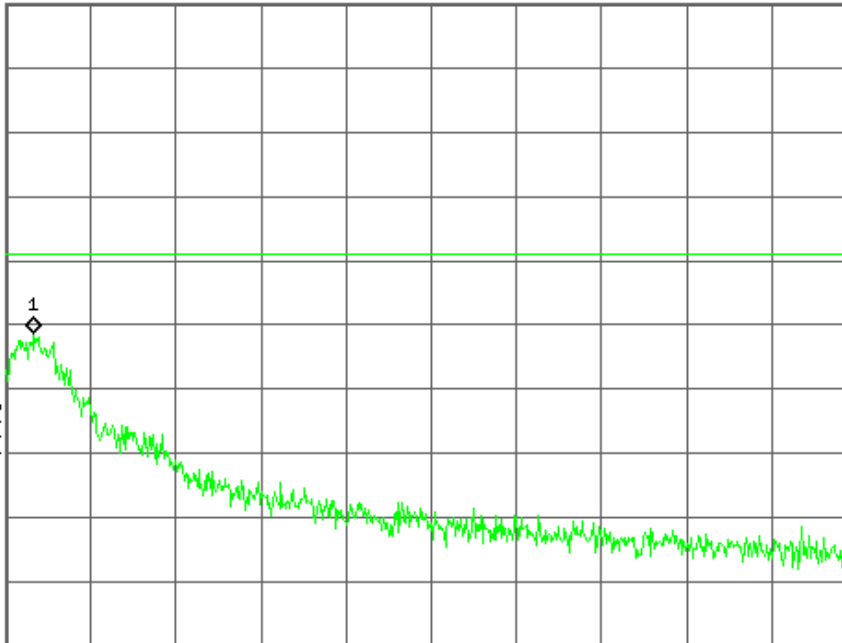

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved