



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : SGH-J700i
Additional Model : SGH-J708i
FCC ID(Requested) : A3LSGHJ700I
Report No : FF-245-R1
Job No : FF-245
Date issued : Dec. 15, 2008

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

SH ONG - Test Engineer

Authorized By

WT JANG - Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	8
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	8
5.2. Radiated Spurious & Harmonic Emission	9
5.3. Peak-Average Ratio	10
5.4. Occupied Bandwidth	11
5.5. Spurious and Harmonic Emission at Antenna Terminal	11
5.5.1. Occupied Bandwidth Emission Limits	11
5.5.2. Conducted Spurious Emission	13
5.6. Frequency Stability / Temperature Variation	14
6. TEST DATA	15
6.1. Effective Radiated Power (E.R.P.)	15
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)	16
6.3. GSM850 Radiated Spurious & Harmonic measurement	17
6.4. GSM1900 Radiated Spurious & Harmonic measurement	18
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.7. Frequency Stability	21
6.7.1. GSM850 Frequency Stability Table	21
6.7.2. GSM850 Frequency Stability Graph	22
6.7.3. GSM1900 Frequency Stability Table	24
6.7.4. GSM1900 Frequency Stability Graph	25
7. CONCLUSION	27
8. TEST PLOTS	28

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHJ700I
- Additional Model : SGH-J708i
- Quantity : Quantity production is planned
- Emission Designators : 255KGXW(GSM850)
250KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.585 W ERP GSM850 (27.67dBm)
0.665 W EIRP GSM1900 (28.23dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Dual-Band GSM850/1900 Phone with EDGE Rx and Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : Nov. 20 - 21, 2008
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FF-245-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000236	2009-04-15
	E4440A(3Hz~26.5GHz)	MY41000233	2009-07-24
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2009-06-20
Power Sensor	E9300H	MY41495838	2009-09-12
	8481B	3318A10325	2009-09-28
	8485A	3318A19924	2009-10-01
Power Meter	E4417A	MY45101042	2009-09-12
	E4419B	GB41293846	2009-09-12
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	MY47510060	2009-03-03
	8960	GB42230535	2009-01-02
	8960	GB42360886	2009-07-08
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
	3121C-DB4	9007-587	2009-04-16
Communication test set	CMU200	109162	2009-10-17
Receive Antenna	HL040	353255/019	2009-10-29
	HL040	353255/020	2010-06-13
Power Supply	E3640A	MY40003594	2009-06-20
	E3640A	MY40003595	2009-05-22
	E3632A	MY40022438	2009-03-03

Divider	11636B	51946	Not Required
	11636B	51942	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

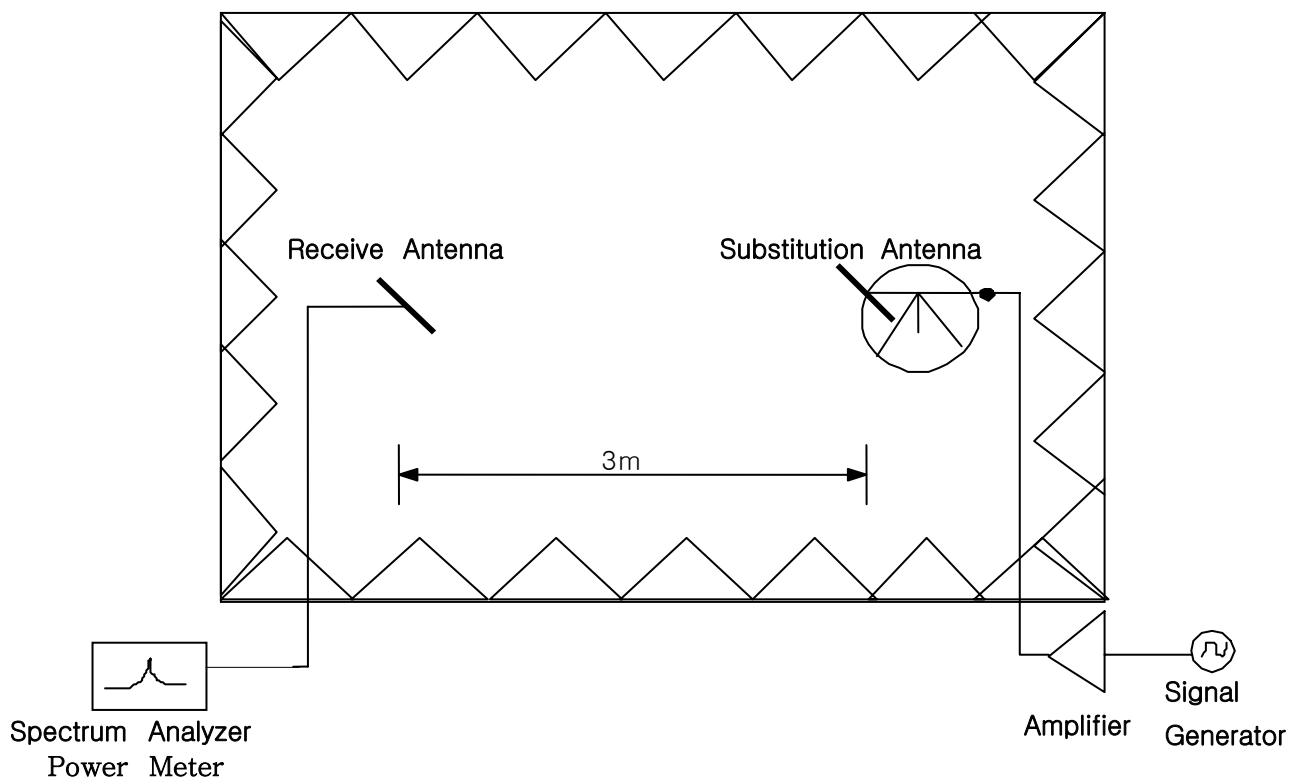


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

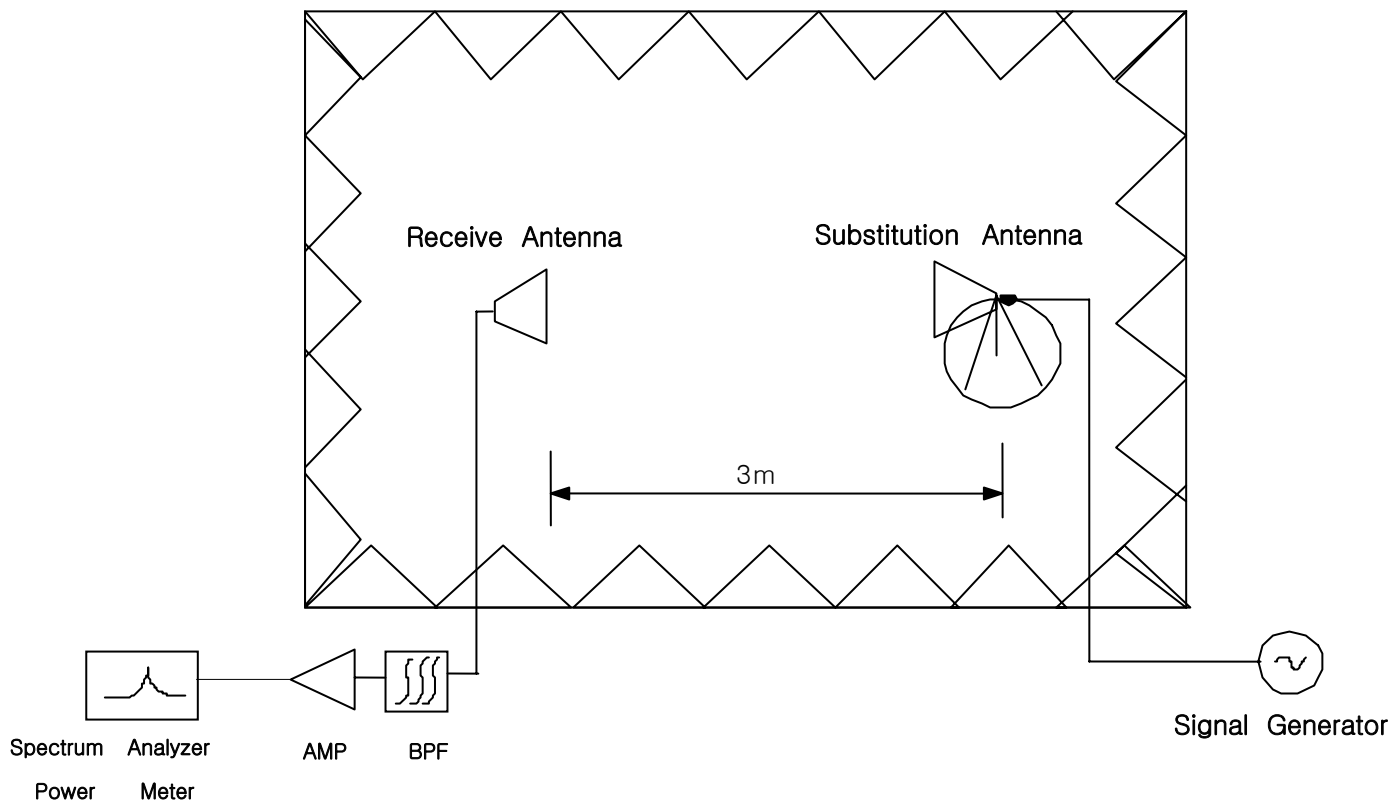


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3.Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.585 \text{ W}) = 40.67 \text{ dB}$$

$$27.67 \text{ dBm} - 40.67 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	27.00	H	-10.16	-0.67	-9.49
		V	-10.43	-0.67	-9.76
836.60	27.00	H	-11.18	-0.73	-10.45
		V	-10.32	-0.73	-9.59
848.80	28.00	H	-12.34	-0.79	-11.55
		V	-10.54	-0.79	-9.75

■ Result (Slide Up)

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-9.77	H	286/180	26.72	0.470	Standard
836.60	-10.00	H	78/100	27.45	0.556	Standard
848.80	-11.88	H	77/80	27.67	0.585	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	26.00	H	-13.02	9.70	-22.72
		V	-13.14	9.70	-22.84
1880.00	28.00	H	-11.56	9.70	-21.26
		V	-11.49	9.70	-21.19
1909.80	28.00	H	-11.41	9.70	-21.11
		V	-11.45	9.70	-21.15

■ Result (Slide Up)

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-22.80	H	304/115	25.92	0.391	Standard
1880.00	-21.69	H	59/115	27.57	0.571	Standard
1909.80	-20.88	H	305/45	28.23	0.665	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 27.67 dBm = 0.585 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 40.67 \text{ dBc}$

■ Result (Slide Up)

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
128	2	1648.40	-64.75	80.70	H
	3	2472.60	-65.91	77.34	H
	4	3296.80	-66.89	74.50	H
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-65.40	79.55	V
	3	2509.80	-66.21	77.02	H
	4	3346.40	-66.43	73.61	V
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-65.16	80.19	V
	3	2546.40	-65.86	76.58	H
	4	3395.20	-66.51	73.83	V
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 28.23 dBm = 0.665 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 41.23 \text{ dBc}$

■ Result (Slide Up)

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
512	2	3700.40	-67.57	71.14	V
	3	5550.60	-65.53	64.02	V
	4	7400.80	-65.11	58.86	V
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-66.29	69.58	H
	3	5640.00	-64.70	63.04	H
	4	7520.00	-63.17	56.87	V
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-65.28	68.49	H
	3	5729.40	-63.41	61.15	H
	4	7639.20	-63.15	56.53	V
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2008. 11. 21

Test Engineer : SH ONG

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.14 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.15	9.50	-13.40	-25.78	-25.24	-64.75	-65.02	80.88	80.70
	3	2472.60	-11.48	10.70	-12.20	-30.65	-30.96	-65.91	-66.90	77.34	78.23
	4	3296.80	-13.42	12.30	-11.90	-34.30	-34.88	-66.89	-67.15	74.60	74.50
	5	4121.00	-14.84	12.50	-10.70	-37.37	-37.16	-	-	-	-
	6	4945.20	-16.67	12.70	-9.00	-39.95	-40.17	-	-	-	-
	7	5769.40	-18.06	12.90	-7.80	-42.25	-42.16	-	-	-	-
190	2	1673.20	-9.17	9.50	-13.30	-26.45	-26.15	-65.65	-65.40	81.39	79.55
	3	2509.80	-11.54	10.70	-12.20	-30.90	-30.96	-66.21	-66.59	77.02	77.73
	4	3346.40	-13.45	12.30	-11.80	-34.28	-34.36	-66.58	-66.43	74.24	73.61
	5	4183.00	-15.11	12.50	-10.40	-36.90	-37.13	-	-	-	-
	6	5019.60	-16.96	12.70	-8.70	-40.04	-40.64	-	-	-	-
	7	5856.20	-18.34	12.90	-7.60	-42.75	-42.94	-	-	-	-
251	2	1697.60	-9.21	9.50	-13.30	-26.64	-26.78	-65.56	-65.16	80.84	80.19
	3	2546.40	-11.56	10.70	-12.10	-30.32	-30.81	-65.86	-66.74	76.94	76.58
	4	3395.20	-13.35	12.30	-11.90	-34.25	-34.55	-67.14	-66.51	74.56	73.83
	5	4244.00	-15.26	12.50	-10.20	-37.07	-37.26	-	-	-	-
	6	5092.80	-17.03	12.70	-8.70	-40.12	-40.75	-	-	-	-
	7	5941.60	-18.49	12.90	-7.40	-43.10	-42.67	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2008. 11. 21

Test Engineer : SH ONG

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.12	12.40	-11.30	-37.56	-37.66	-68.34	-67.57	72.01	71.14
	3	5550.60	-17.80	12.90	-8.10	-42.26	-42.74	-65.73	-65.53	64.70	64.02
	4	7400.80	-20.57	10.50	-2.90	-47.18	-47.48	-67.83	-65.11	61.88	58.86
	5	9251.00	-23.73	11.20	-0.50	-51.10	-51.20	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-55.84	-55.59	-	-	-	-
	7	12951.40	-28.72	12.90	2.80	-58.86	-59.09	-	-	-	-
661	2	3760.00	-14.21	12.40	-11.20	-37.94	-37.86	-66.29	-66.86	69.58	70.23
	3	5640.00	-17.89	12.90	-8.00	-42.89	-43.03	-64.70	-65.60	63.04	63.80
	4	7520.00	-20.69	10.60	-2.90	-47.23	-47.53	-66.67	-63.17	60.67	56.87
	5	9400.00	-23.29	11.60	-1.30	-51.90	-51.21	-	-	-	-
	6	11280.00	-26.43	12.10	1.30	-56.00	-56.21	-	-	-	-
	7	13160.00	-28.29	12.80	2.50	-58.97	-59.23	-	-	-	-
810	2	3819.60	-14.27	12.40	-11.10	-38.02	-38.35	-65.28	-65.80	68.49	68.68
	3	5729.40	-17.95	13.00	-8.00	-43.49	-43.39	-63.41	-63.91	61.15	61.75
	4	7639.20	-21.02	11.20	-3.20	-47.61	-47.85	-63.92	-63.15	57.54	56.53
	5	9549.00	-23.65	11.70	-1.00	-52.29	-52.76	-	-	-	-
	6	11458.80	-26.89	11.70	2.20	-56.01	-56.16	-	-	-	-
	7	13368.60	-28.44	12.30	3.10	-59.88	-60.15	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	35.69	836,600,036	0.000004	0.043
100%		-30	27.84	836,600,028	0.000003	0.033
100%		-20	-23.52	836,599,976	-0.000003	-0.028
100%		-10	31.07	836,600,031	0.000004	0.037
100%		0	9.51	836,600,010	0.000001	0.011
100%		+10	22.27	836,600,022	0.000003	0.027
100%		+20	35.69	836,600,036	0.000004	0.043
100%		+30	25.84	836,600,026	0.000003	0.031
100%		+40	-21.30	836,599,979	-0.000003	-0.025
100%		+50	-7.79	836,599,992	-0.000001	-0.009
100%		+60	12.58	836,600,013	0.000002	0.015
85%	3.35	+20	18.28	836,600,018	0.000002	0.022
115%	4.26	+20	15.55	836,600,016	0.000002	0.019
Batt.Endpoint	3.35	+20	18.28	836,600,018	0.000002	0.022


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

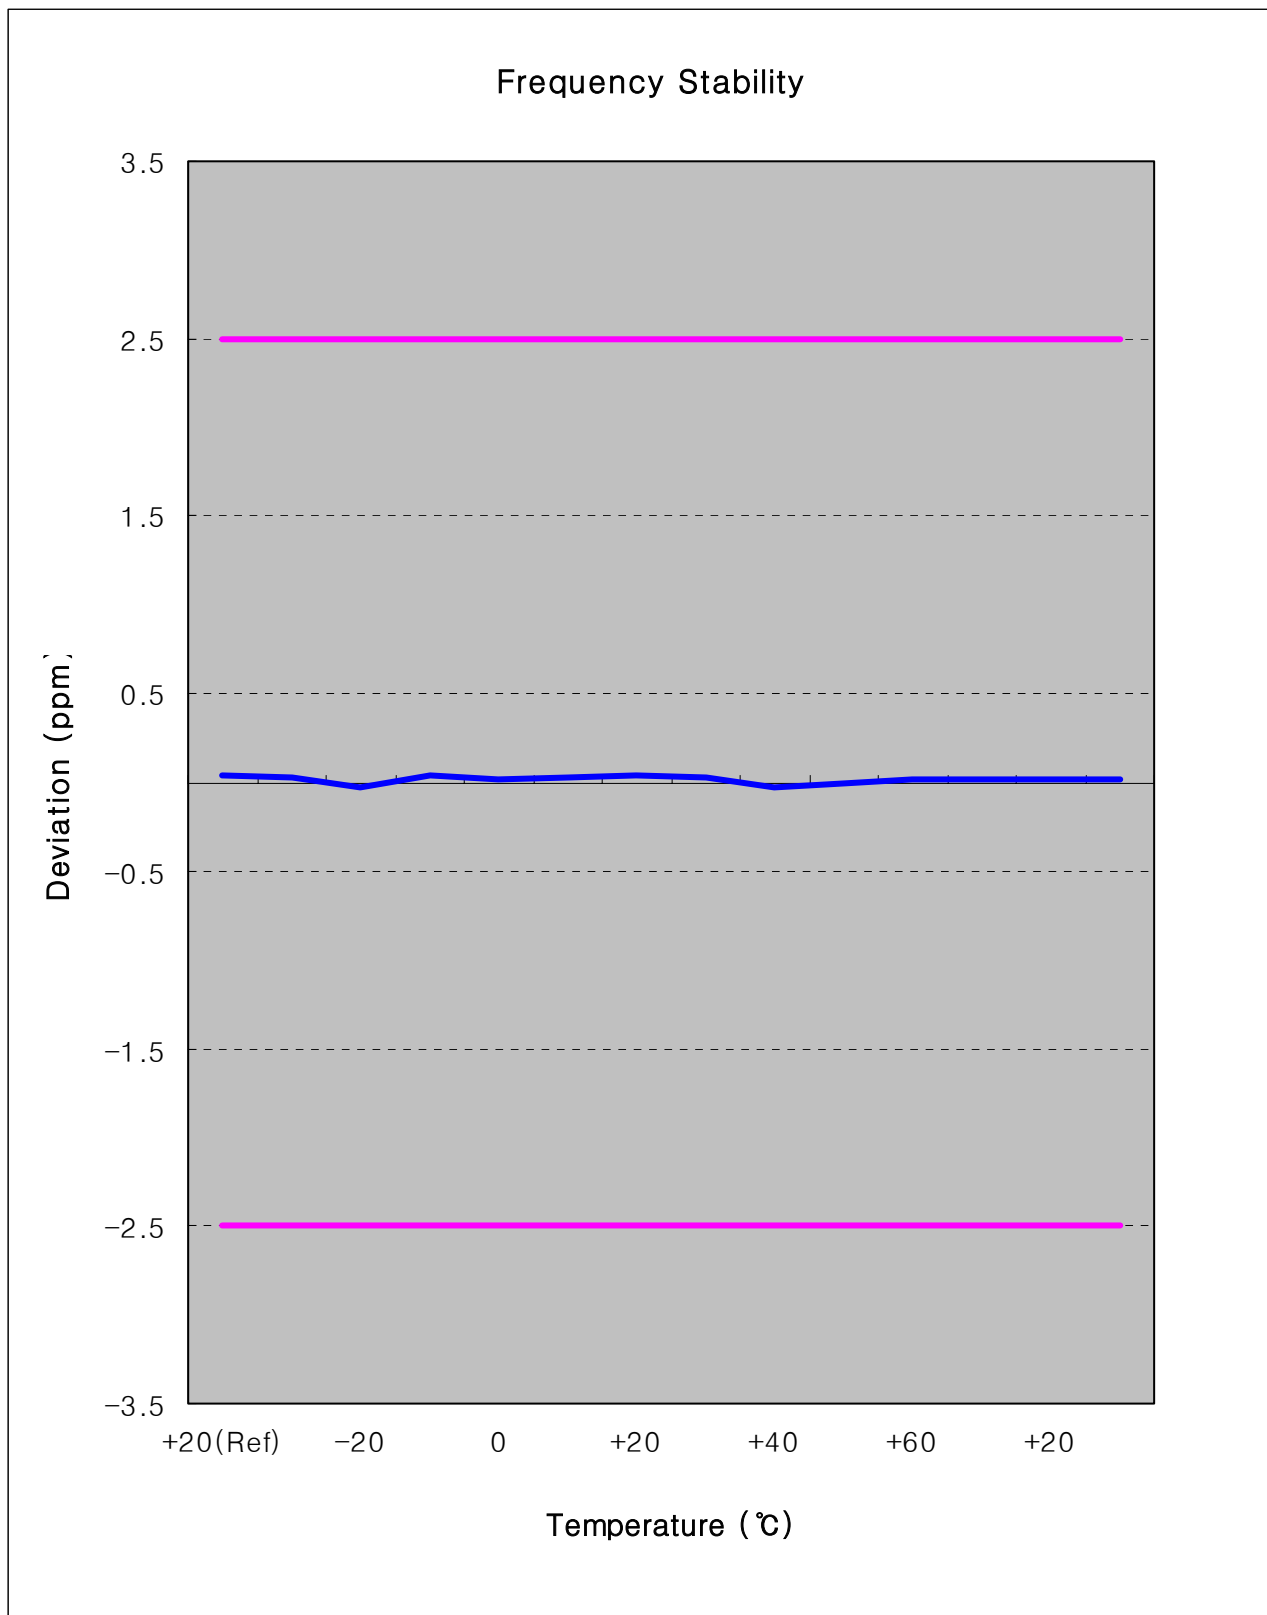

Zoom IN

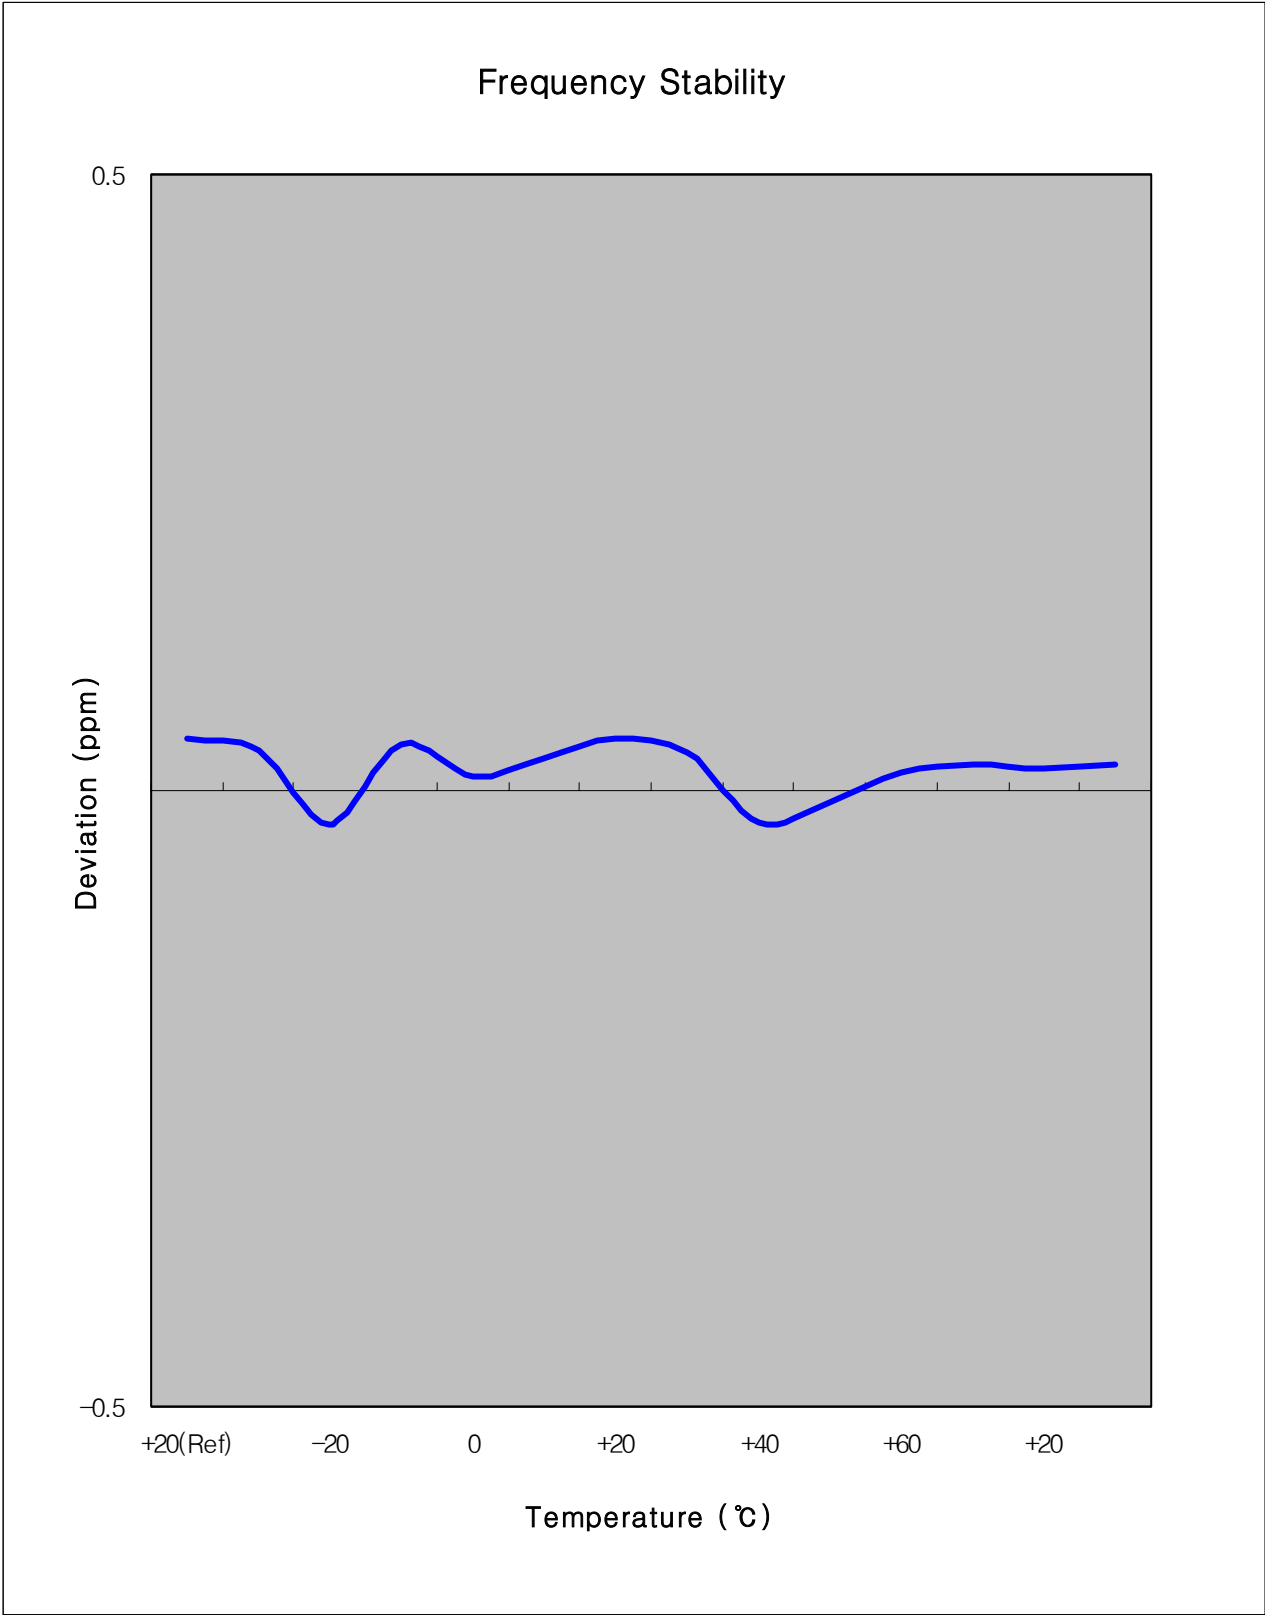

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-27.51	1,879,999,972	-0.000001	-0.015
100%		-30	-26.36	1,879,999,974	-0.000001	-0.014
100%		-20	23.73	1,880,000,024	0.000001	0.013
100%		-10	-32.77	1,879,999,967	-0.000002	-0.017
100%		0	22.54	1,880,000,023	0.000001	0.012
100%		+10	13.44	1,880,000,013	0.000001	0.007
100%		+20	-27.51	1,879,999,972	-0.000001	-0.015
100%		+30	-20.96	1,879,999,979	-0.000001	-0.011
100%		+40	-27.87	1,879,999,972	-0.000001	-0.015
100%		+50	24.88	1,880,000,025	0.000001	0.013
100%		+60	31.49	1,880,000,031	0.000002	0.017
85%	3.35	+20	25.18	1,880,000,025	0.000001	0.013
115%	4.26	+20	33.73	1,880,000,034	0.000002	0.018
Batt.Endpoint	3.35	+20	25.18	1,880,000,025	0.000001	0.013


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

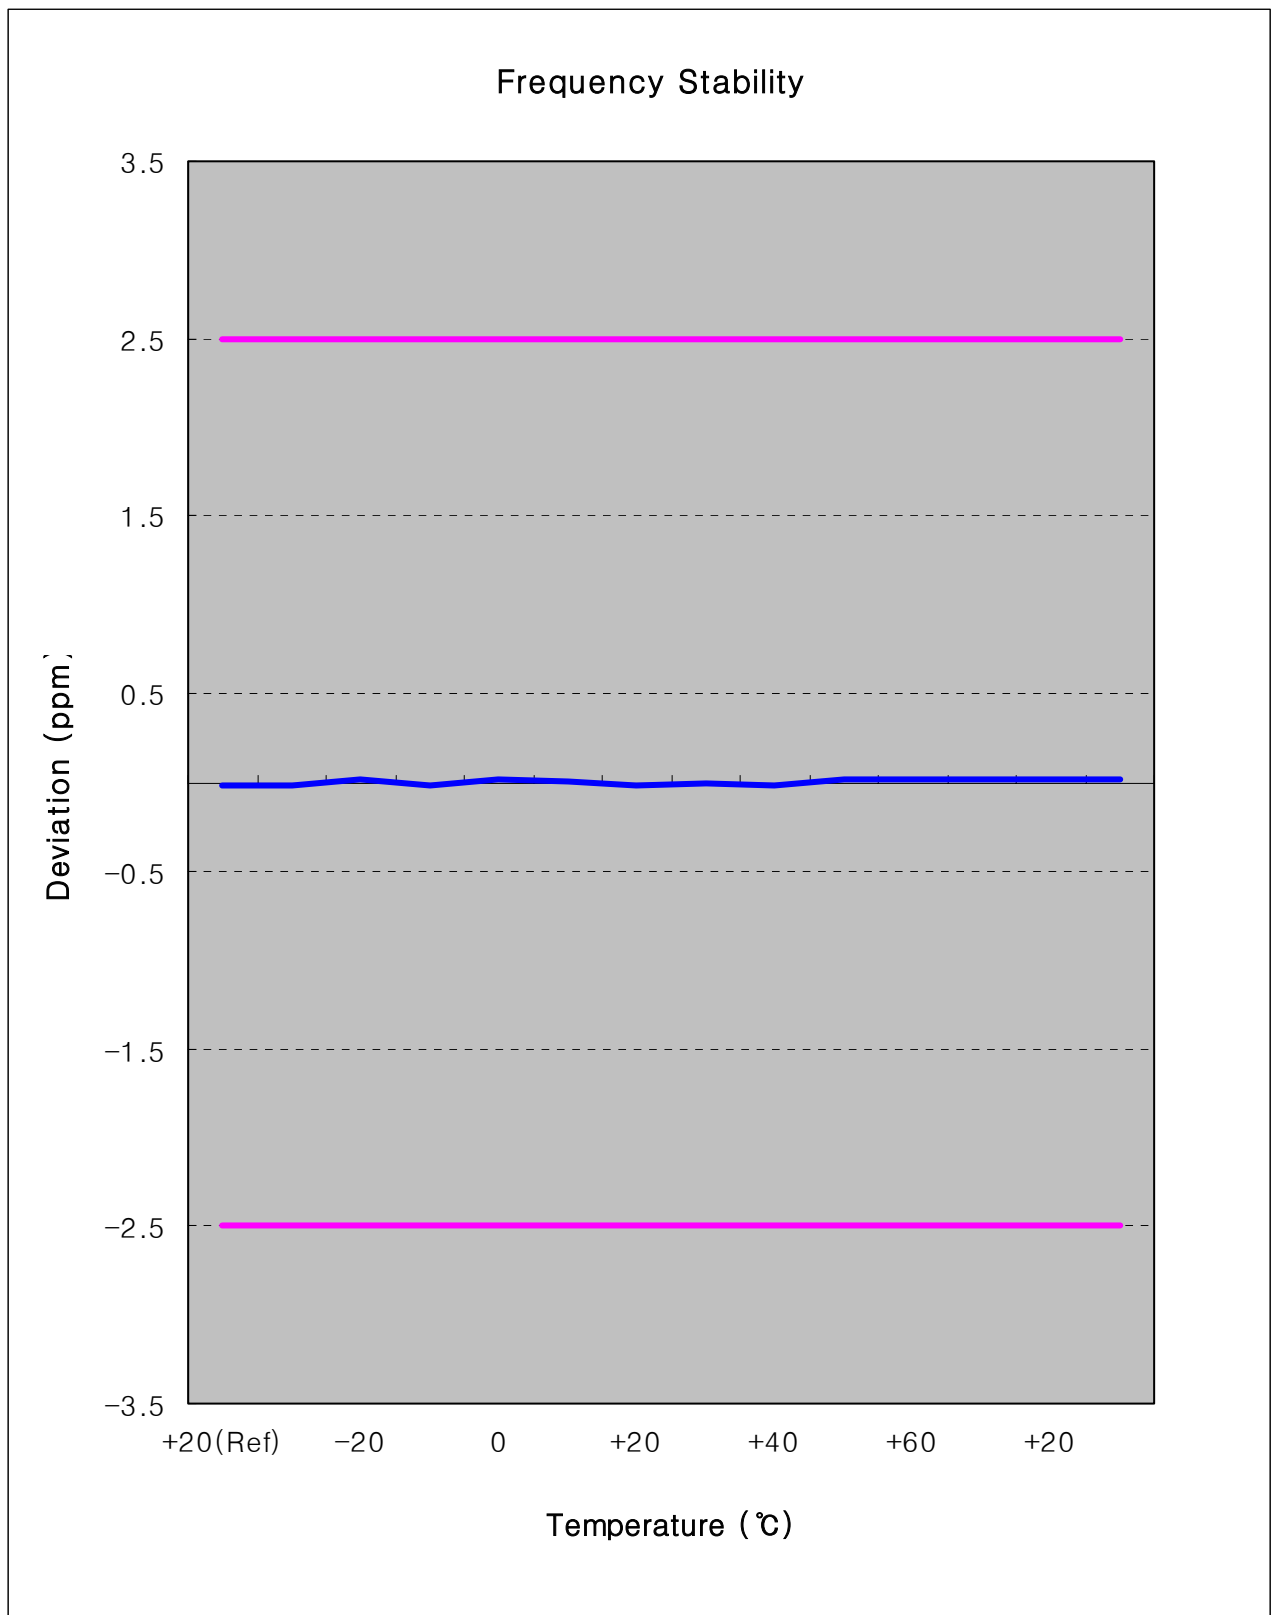

Zoom IN

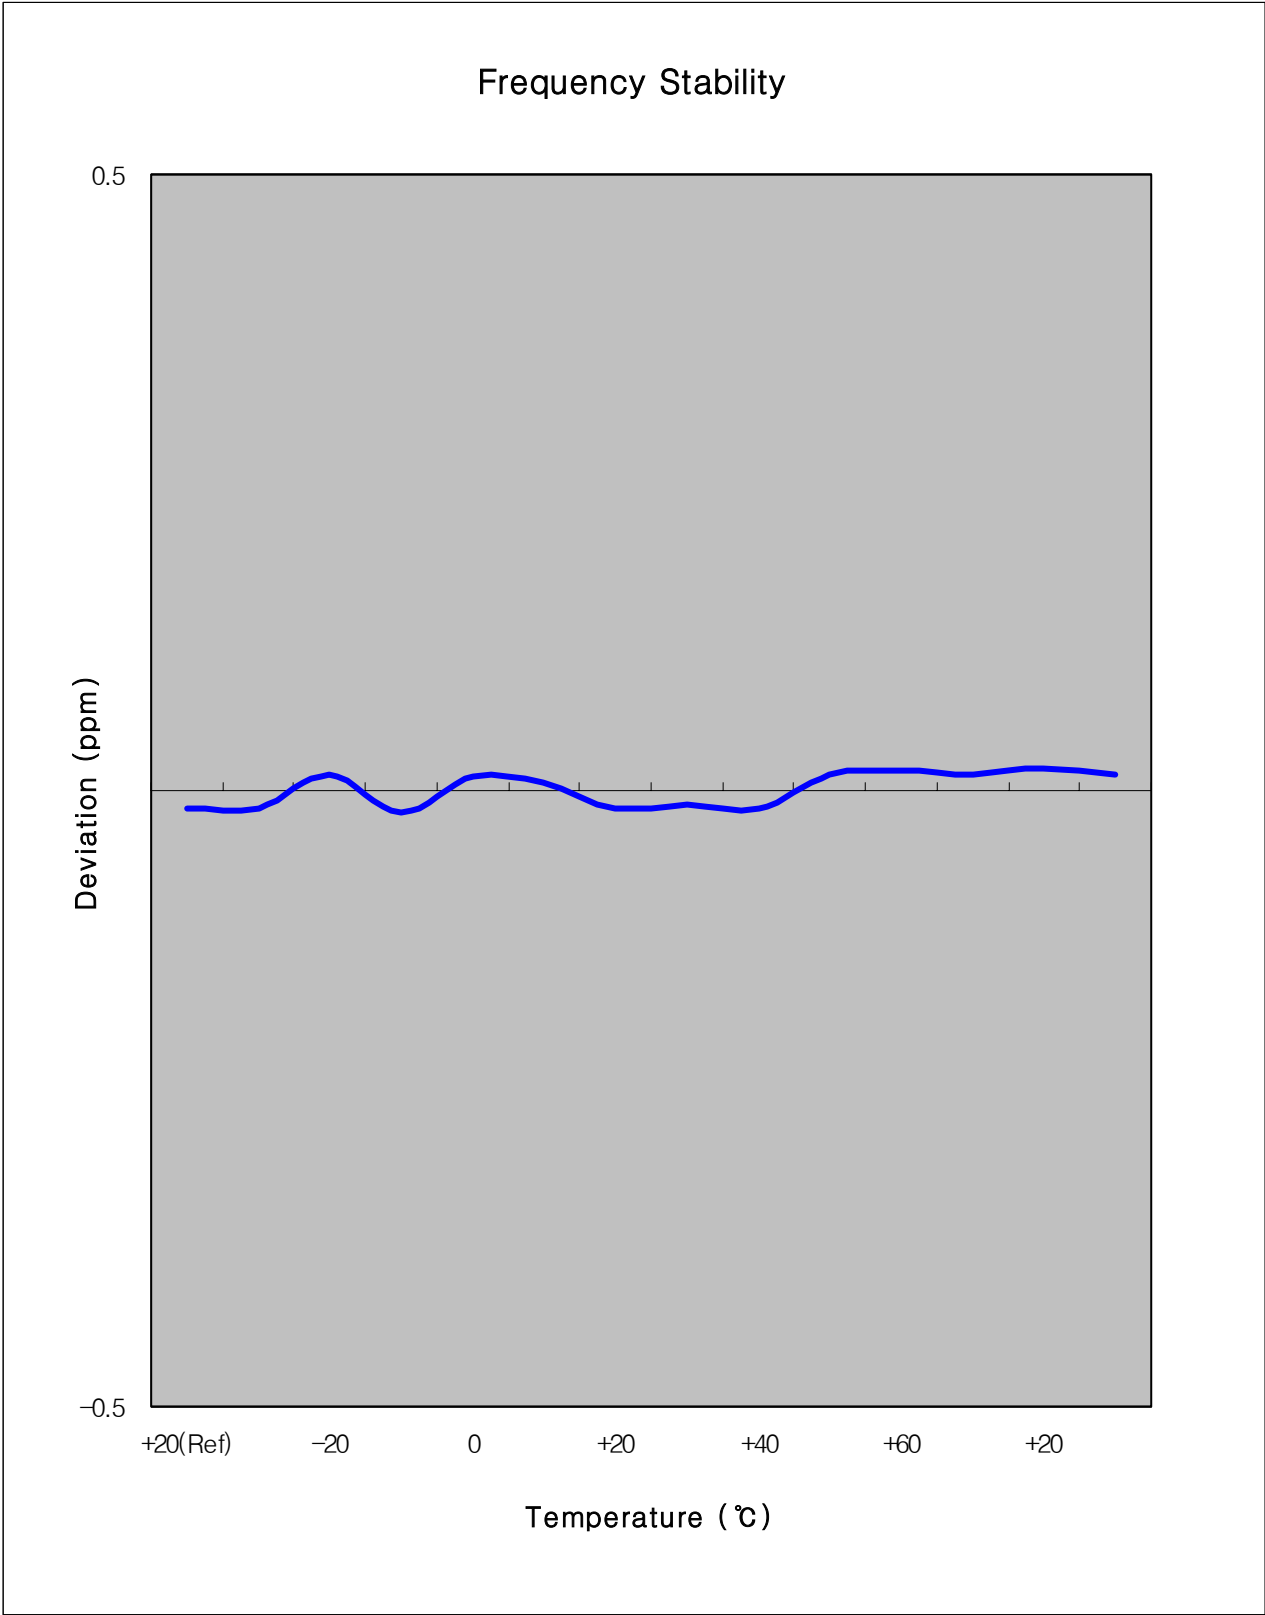



7. CONCLUSION

The data collected shows that the SAMSUNG Dual-Band GSM850/1900 Phone with EDGE Rx and Bluetooth.

FCC ID : A3LSGHJ700I complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS


GSM850



Agilent

R T


Freq/Channel

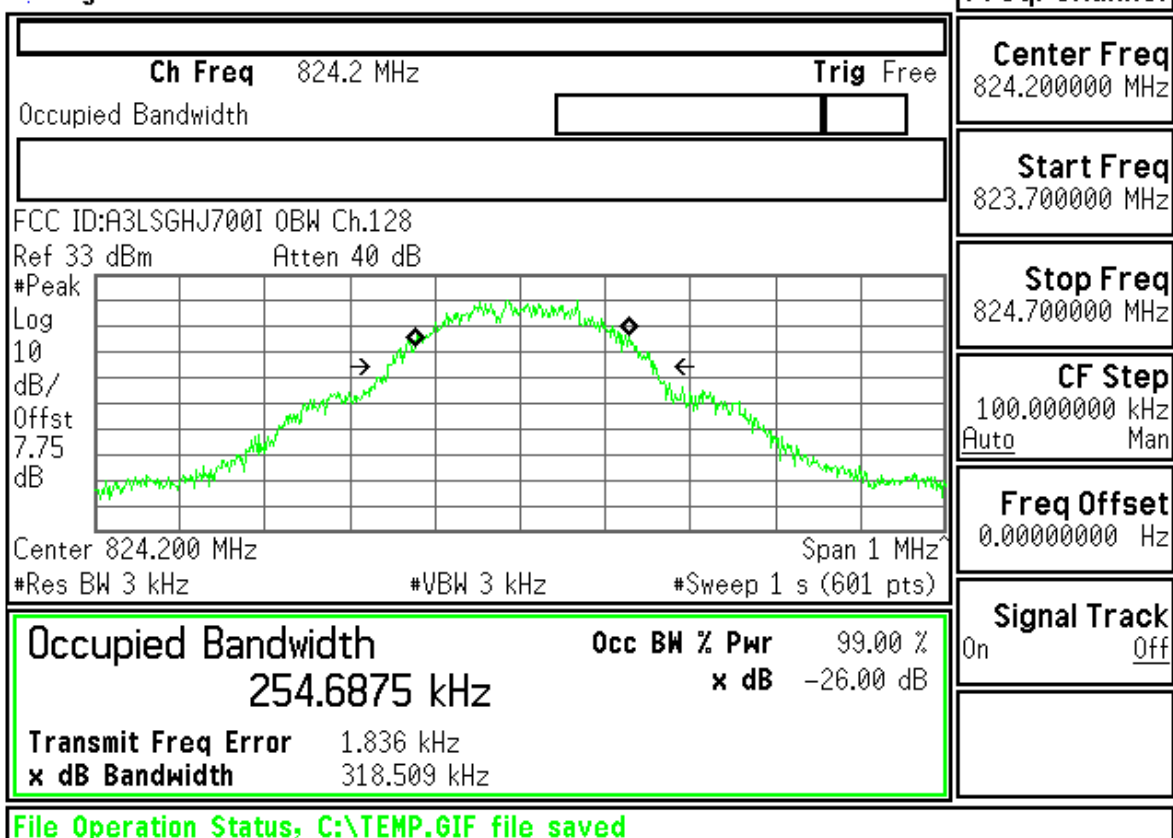
Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T

Freq/Channel

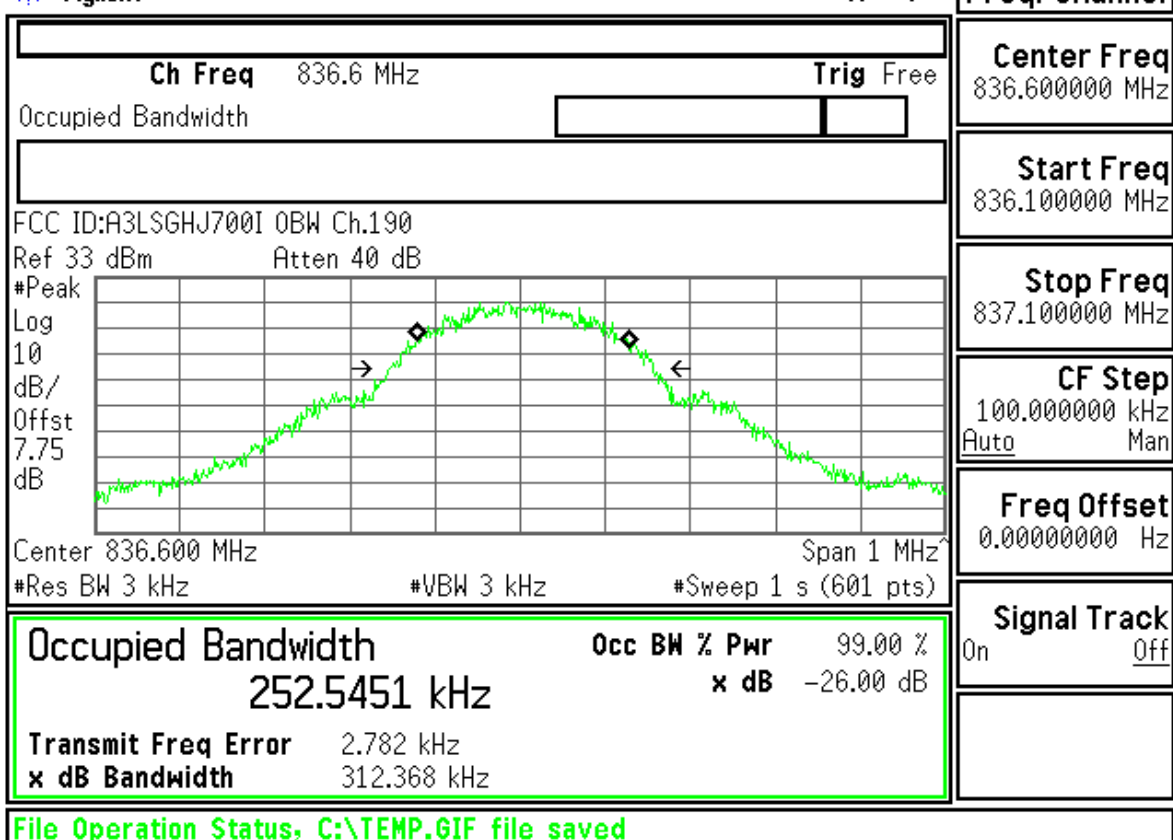Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

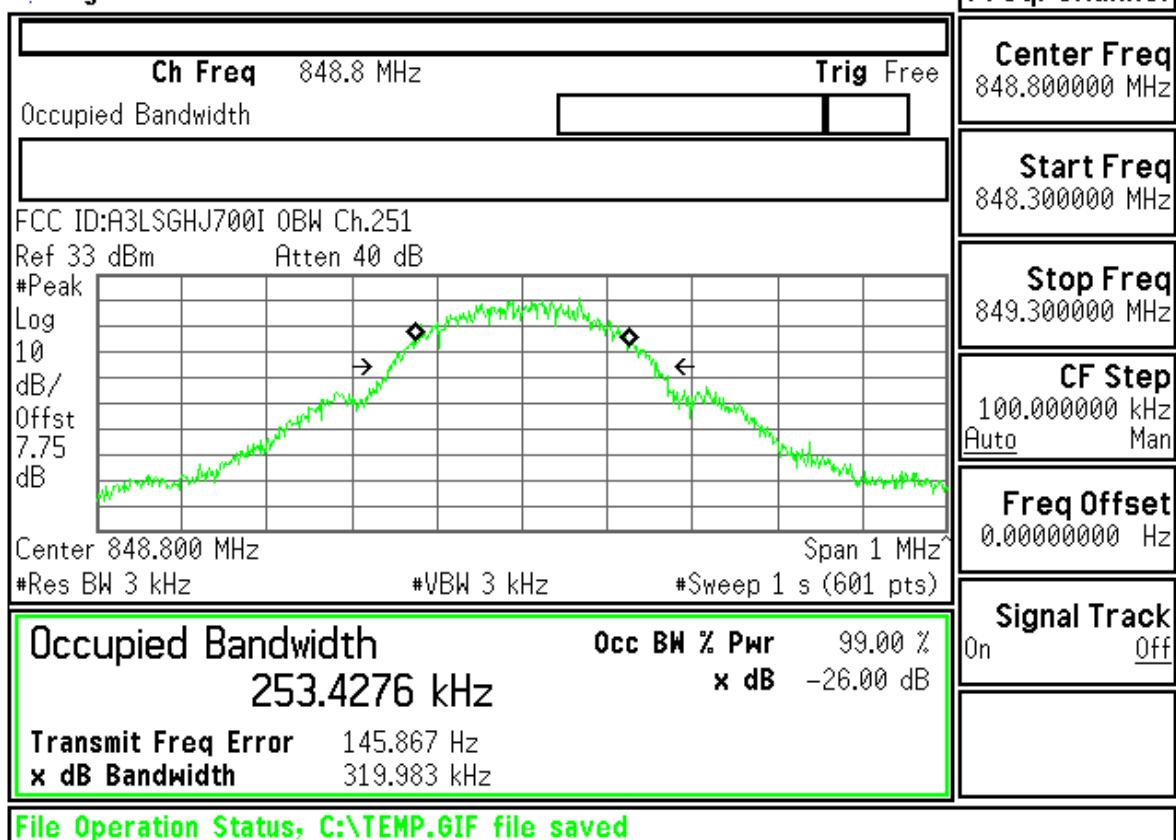



Freq/Channel
Center Freq 848.800000 MHz
Start Freq 848.300000 MHz
Stop Freq 849.300000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off



Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.32</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.32</td><td>----</td><td>----</td><td>----</td></tr></table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.32	----	----	----	Estimated Carrier Power	32.32	----	----	----	Downlink Traffic Power						
									Burst 1	Burst 2	Burst 3	Burst 4																	
								Burst Power	32.32	----	----	----																	
		Estimated Carrier Power	32.32	----	----	----																							
		Traffic Band																											
GSN850																													
Single						Traffic Channel																							
						128																							
Swap Window Positions		Phase & Frequency Error						MS TX Level																					
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.95</td><td>1.77</td><td>-29.01</td></tr><tr><td>Maximum</td><td>5.25</td><td>2.13</td><td>15.39</td></tr><tr><td>Average</td><td>4.64</td><td>2.02</td><td>6.30</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.95	1.77	-29.01	Maximum	5.25	2.13	15.39	Average	4.64	2.02	6.30	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
									Peak Phase °	RMS Phase °	Frequency Hz																		
								Minimum	3.95	1.77	-29.01																		
								Maximum	5.25	2.13	15.39																		
Average	4.64	2.02	6.30																										
Pass/Fail	Pass	Pass	Pass																										
50 / 50						Return																							
1 of 2				Active Cell Connected			Sys Type: GSM		1 of 2																				
						IntRef	Offset	R T																					


Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.19</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.19</td><td>----</td><td>----</td><td>----</td></tr></table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.19	----	----	----	Estimated Carrier Power	32.19	----	----	----	Downlink Traffic Power						
	Burst 1							Burst 2	Burst 3	Burst 4																			
Burst Power	32.19							----	----	----																			
Estimated Carrier Power	32.19							----	----	----																			
Swap Window Positions		Traffic Band																											
		GSN850																											
		Traffic Channel																											
		190																											
50 / 50		Phase & Frequency Error						MS TX Level																					
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.94</td><td>1.72</td><td>-25.10</td></tr><tr><td>Maximum</td><td>5.13</td><td>2.14</td><td>16.22</td></tr><tr><td>Average</td><td>4.59</td><td>1.96</td><td>1.85</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.94	1.72	-25.10	Maximum	5.13	2.14	16.22	Average	4.59	1.96	1.85	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
									Peak Phase °	RMS Phase °	Frequency Hz																		
								Minimum	3.94	1.72	-25.10																		
Maximum	5.13							2.14	16.22																				
Average	4.59	1.96	1.85																										
Pass/Fail	Pass	Pass	Pass																										
1 of 2		Single						Return																					
		<table><tr><td colspan="2"></td><td colspan="3">Active Cell Connected</td><td colspan="2">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="3"></td><td colspan="2"></td></tr></table>								Active Cell Connected			Sys Type: GSM									1 of 2							
		Active Cell Connected			Sys Type: GSM																								
					IntRef	Offset	R T																						



Measurement/Instrument Screen																																
Control		Transmit Power						TCH Parms																								
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.12</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.12</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.12	----	----	----	Estimated Carrier Power	32.12	----	----	----	Downlink Traffic Power ▾									
			Burst 1	Burst 2	Burst 3	Burst 4																										
		Burst Power	32.12	----	----	----																										
		Estimated Carrier Power	32.12	----	----	----																										
Traffic Band GSM850																																
Swap Window Positions		Single						Traffic Channel 251																								
		<table border="1"> <thead> <tr> <th colspan="3">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.84</td> <td>1.65</td> <td>-3.70</td> </tr> <tr> <td>Maximum</td> <td>5.29</td> <td>1.99</td> <td>9.73</td> </tr> <tr> <td>Average</td> <td>4.46</td> <td>1.87</td> <td>3.30</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>						Phase & Frequency Error				Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.84	1.65	-3.70	Maximum	5.29	1.99	9.73	Average	4.46	1.87	3.30	Pass/Fail	Pass	Pass	Pass	MS TX Level 5	
		Phase & Frequency Error																														
			Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	3.84	1.65	-3.70																													
Maximum	5.29	1.99	9.73																													
Average	4.46	1.87	3.30																													
Pass/Fail	Pass	Pass	Pass																													
50 / 50						Channel Mode Setup ▾																										
Active Cell Connected						Sys Type: GSM		Return																								
1 of 2		IntRef Offset R T						1 of 2																								

Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power ▾																					
		Change View		Traffic Band GSM850																									
		<table border="1"> <thead> <tr> <th>Burst</th> <th>Px Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>31.97</td> <td>GSMK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	Px Power (dBm)	Modulation	Mask	1	31.97	GSMK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Traffic Channel 128	
		Burst	Px Power (dBm)	Modulation	Mask																								
		1	31.97	GSMK	ETSI																								
		2	----	----	----																								
3	----	----	----																										
4	----	----	----																										
Continuous						MS TX Level 5																							
1 of 2		Active Cell Connected						Sys Type: GSM																					
		IntRef Offset R T						1 of 2																					

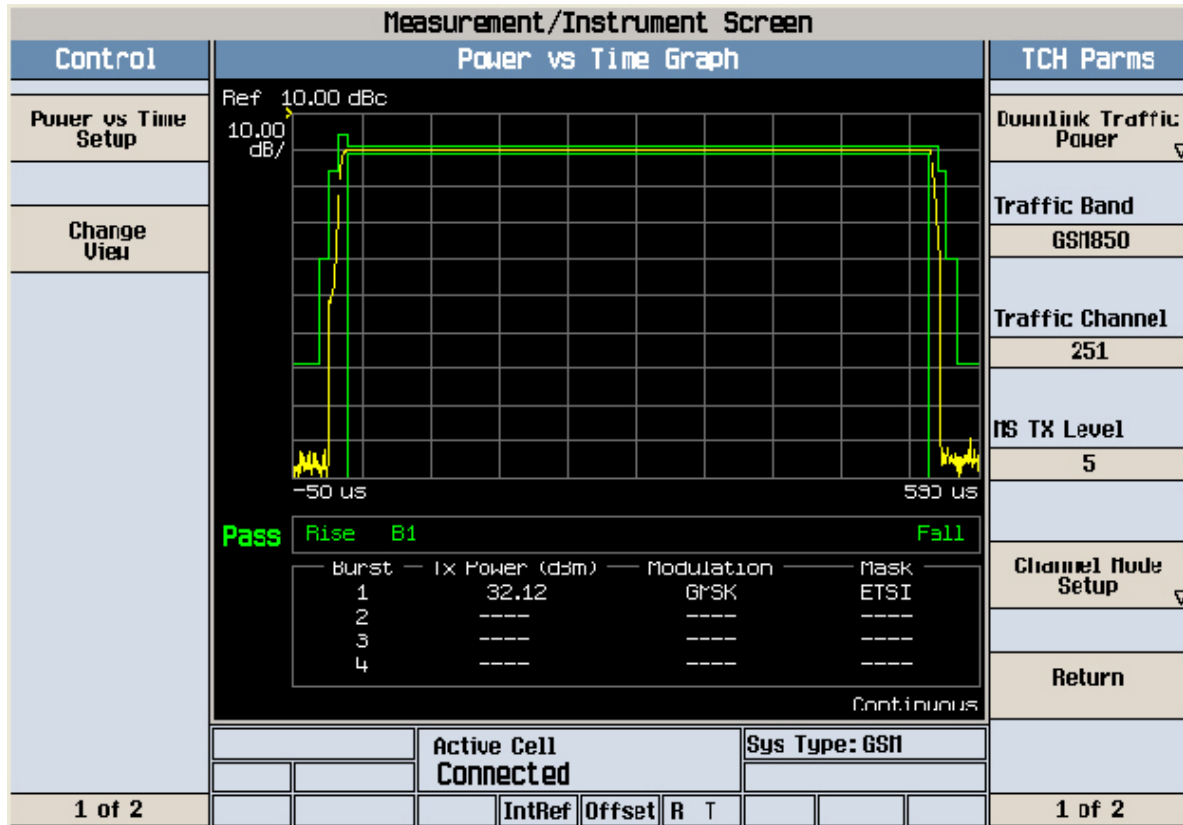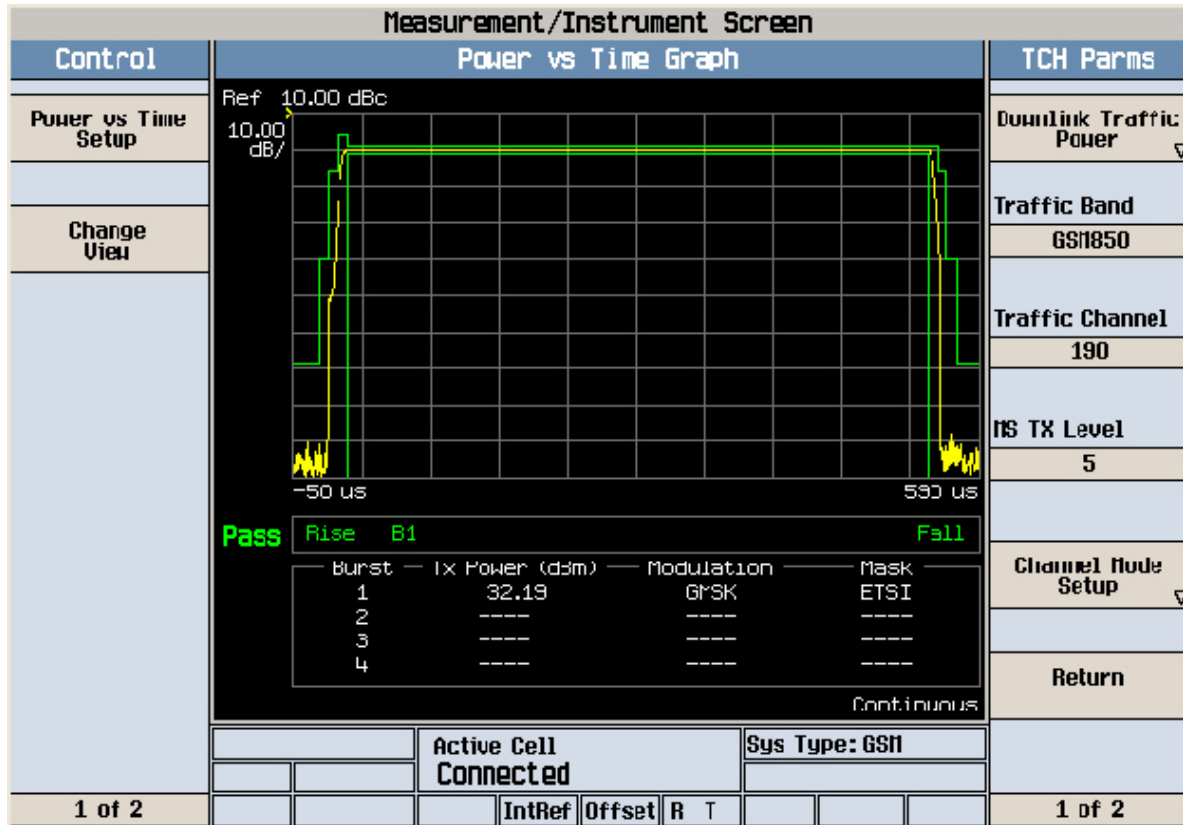

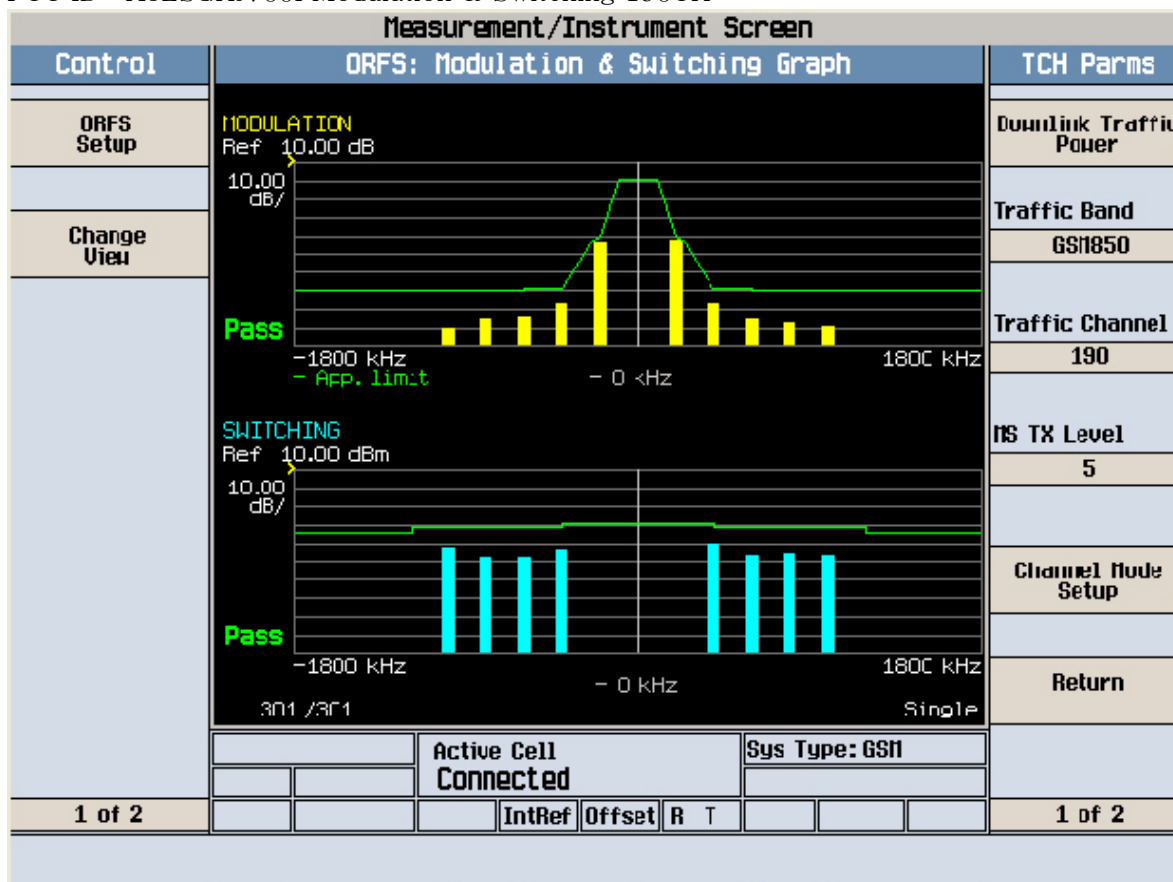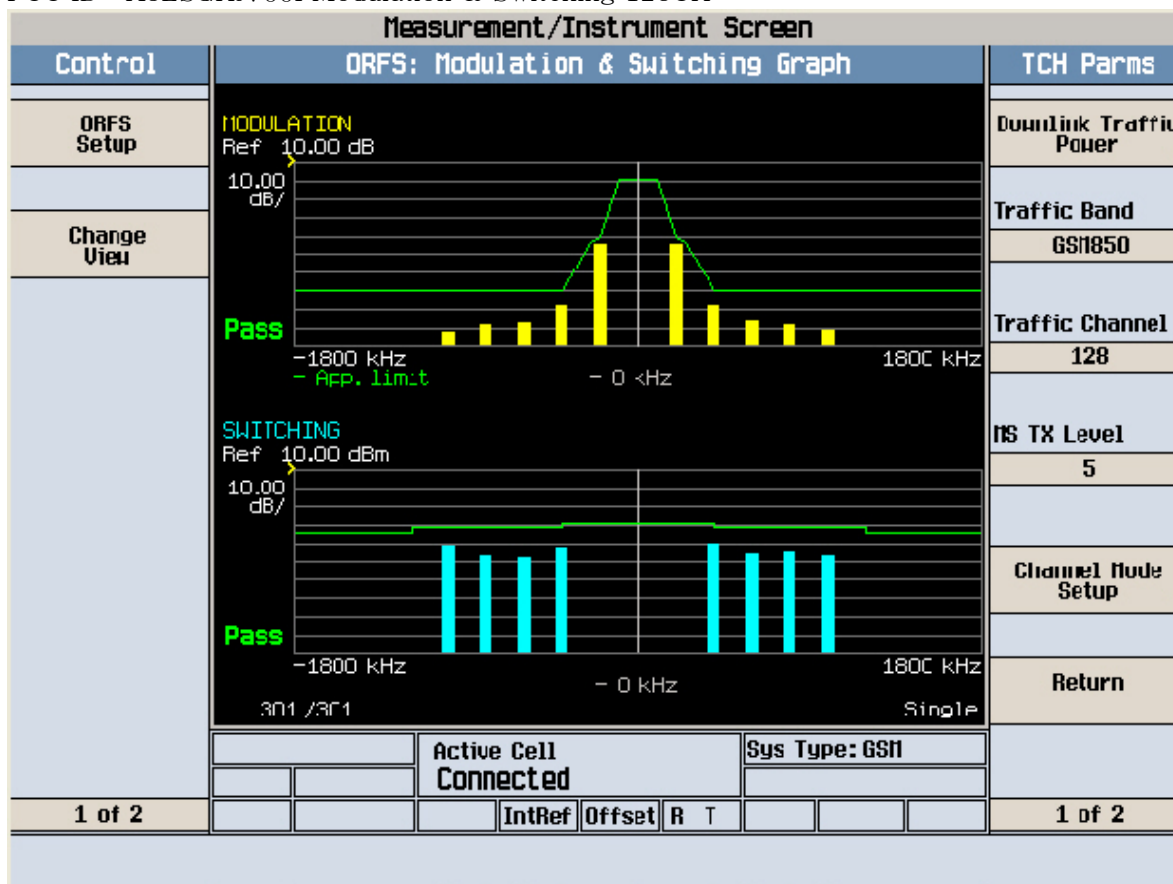

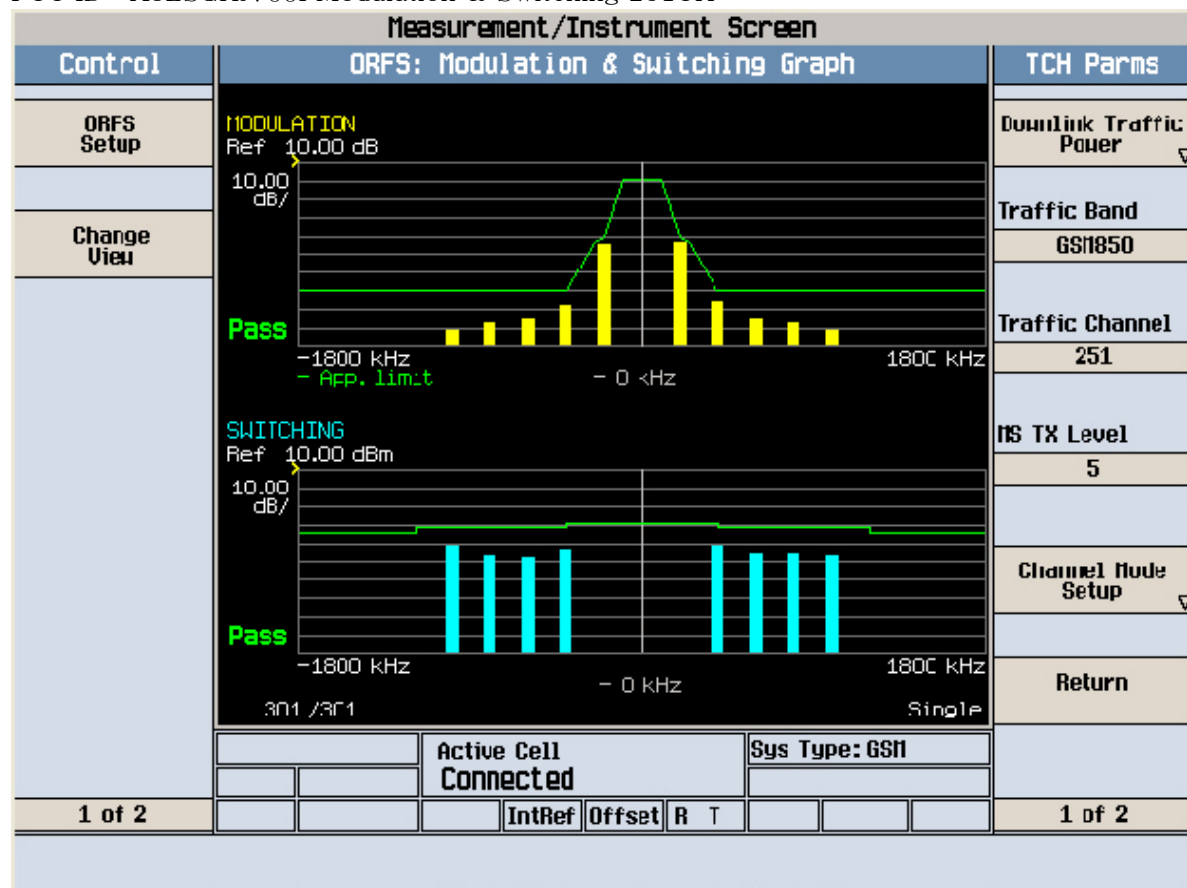

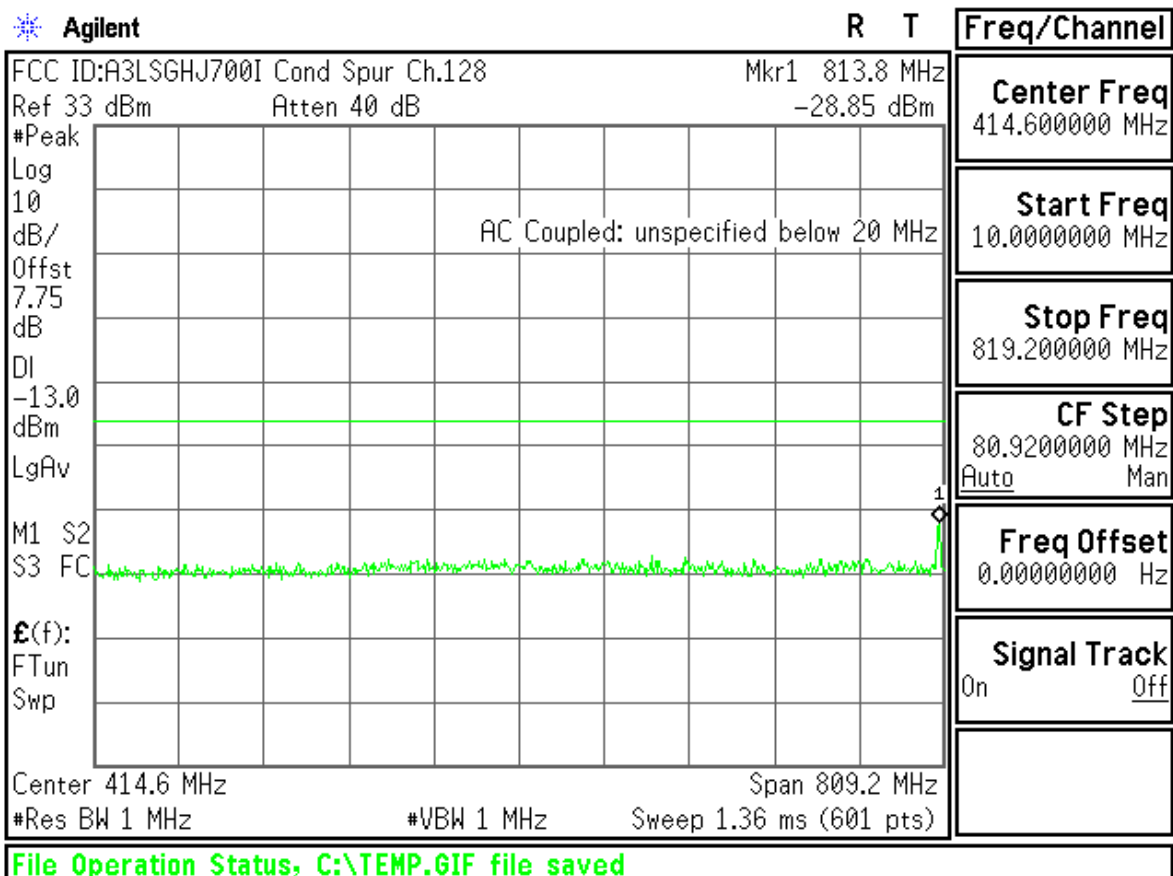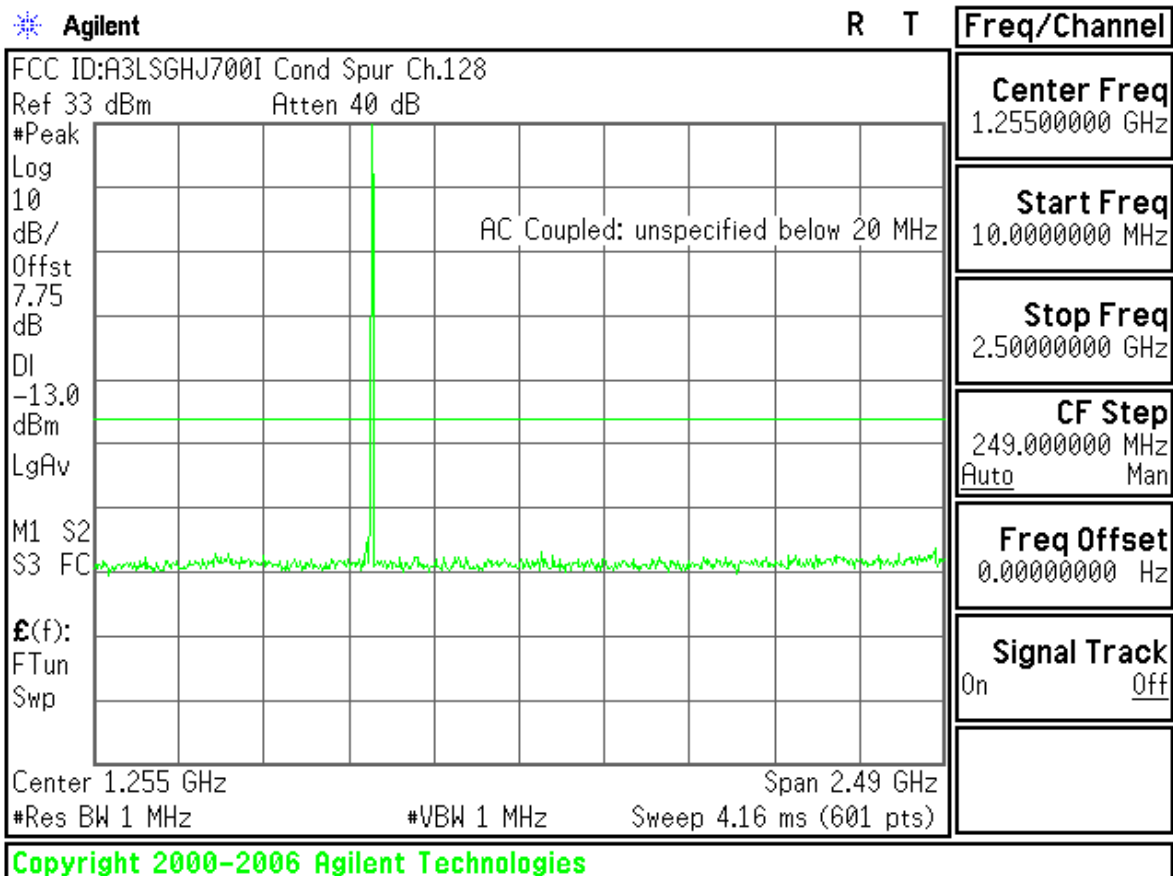

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.128

Mkr1 829 MHz

Ref 33 dBm

Atten 40 dB

-22.99 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

1

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

Center 1.665 GHz

Span 1.671 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 2.8 ms (601 pts)

Center Freq
1.66460000 GHz

Start Freq
829.200000 MHz

Stop Freq
2.50000000 GHz

CF Step
167.080000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.128

Mkr1 7.288 GHz

Ref 33 dBm

Atten 40 dB

-30.33 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

1

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

Center 6.250 GHz

Span 7.5 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 12.52 ms (601 pts)

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.190

Mkr1 831.6 MHz

Ref 33 dBm

Atten 40 dB

-25.71 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

420.800000 MHz

Start Freq

10.0000000 MHz

Stop Freq

831.600000 MHz

CF Step

82.1600000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 420.8 MHz



Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

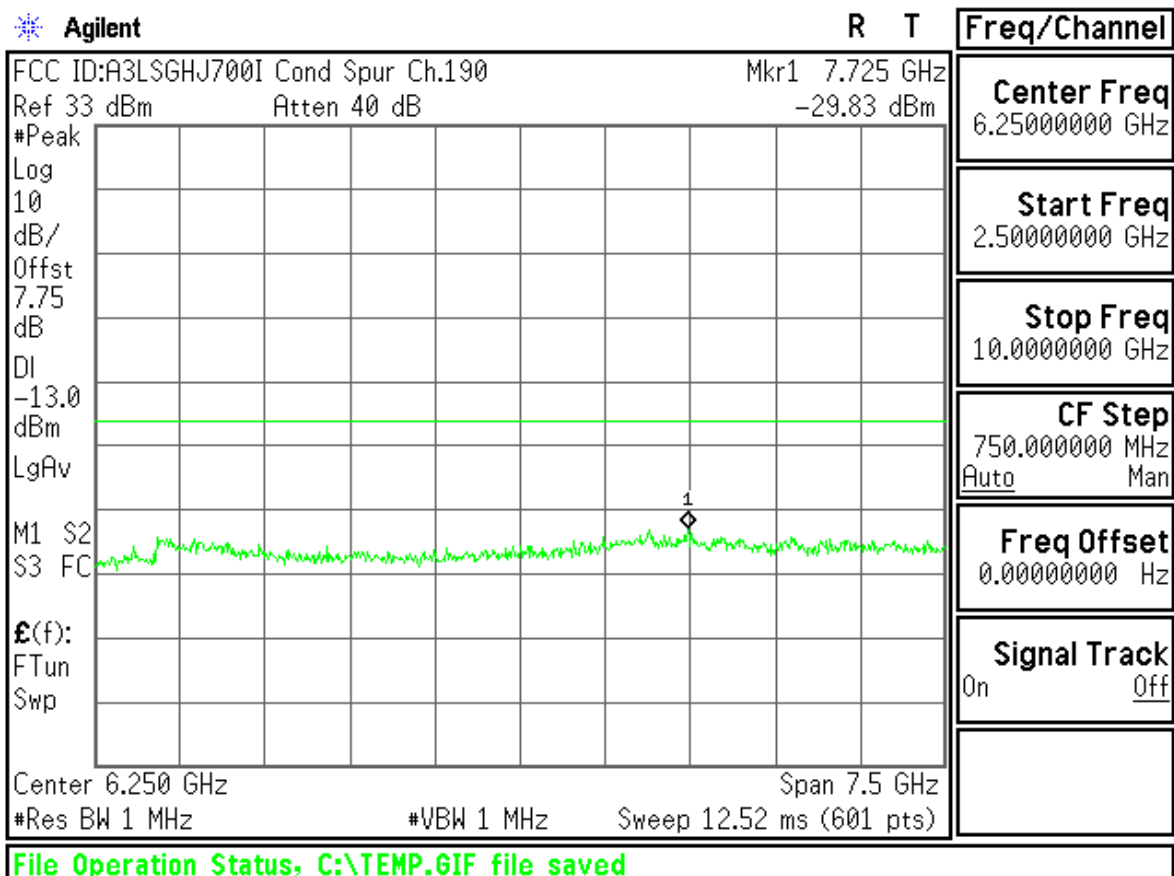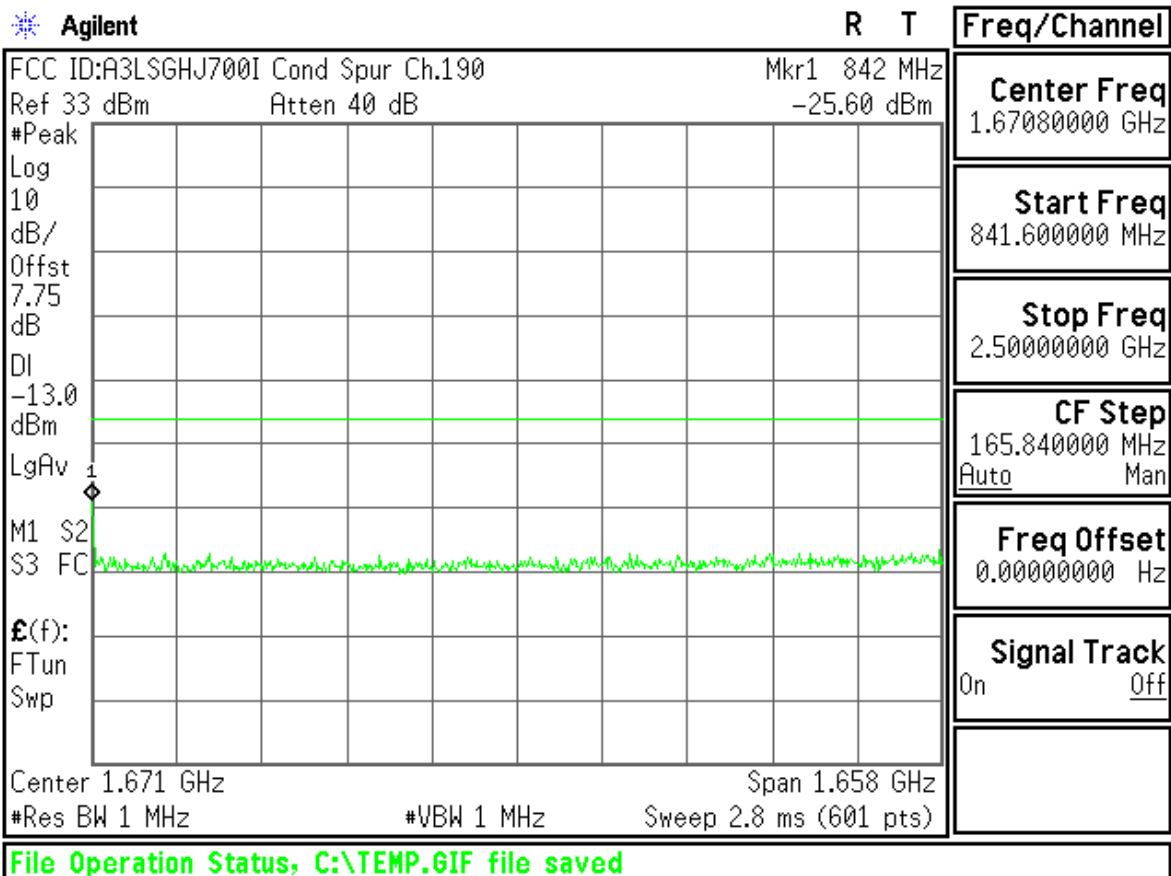

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.251

Mkr1 843.8 MHz

Ref 33 dBm

Atten 40 dB

-24.08 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

426.900000 MHz

Start Freq

10.0000000 MHz

Stop Freq

843.800000 MHz

CF Step

83.3800000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 426.9 MHz



Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

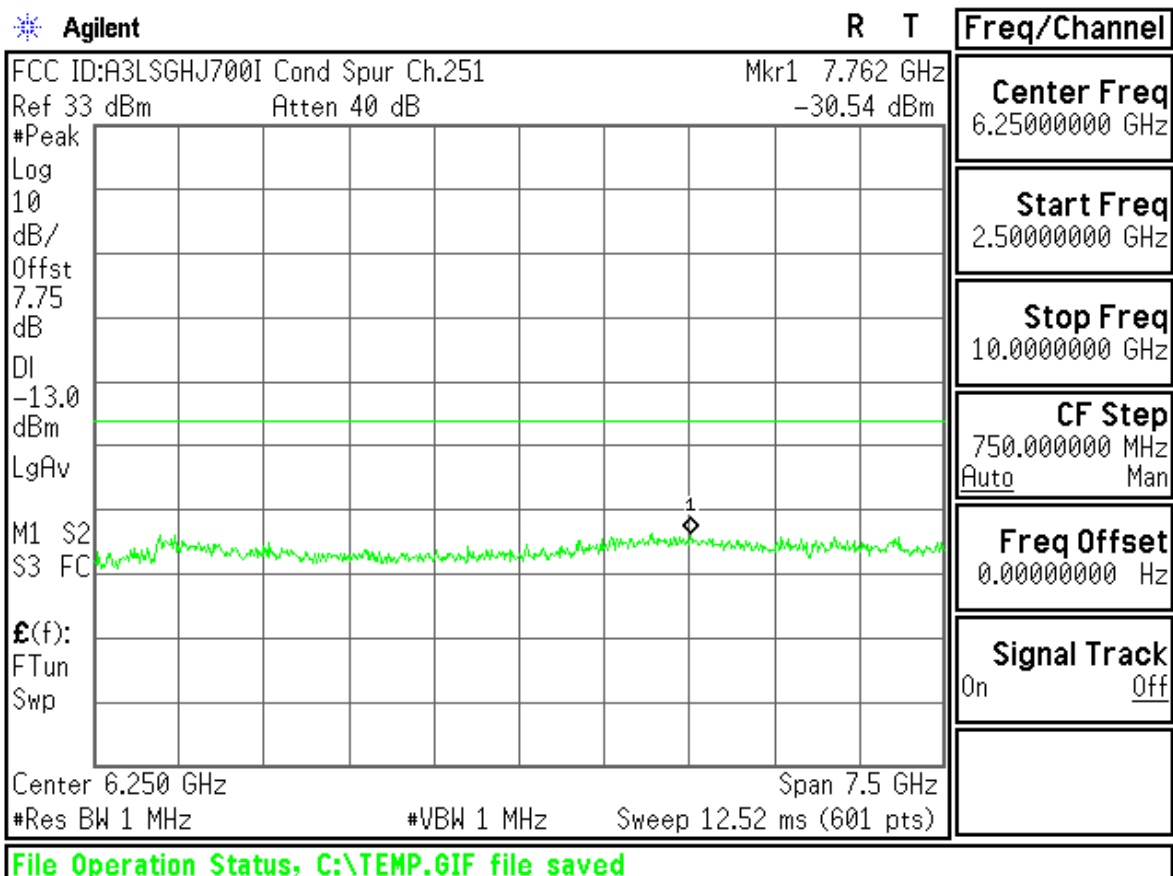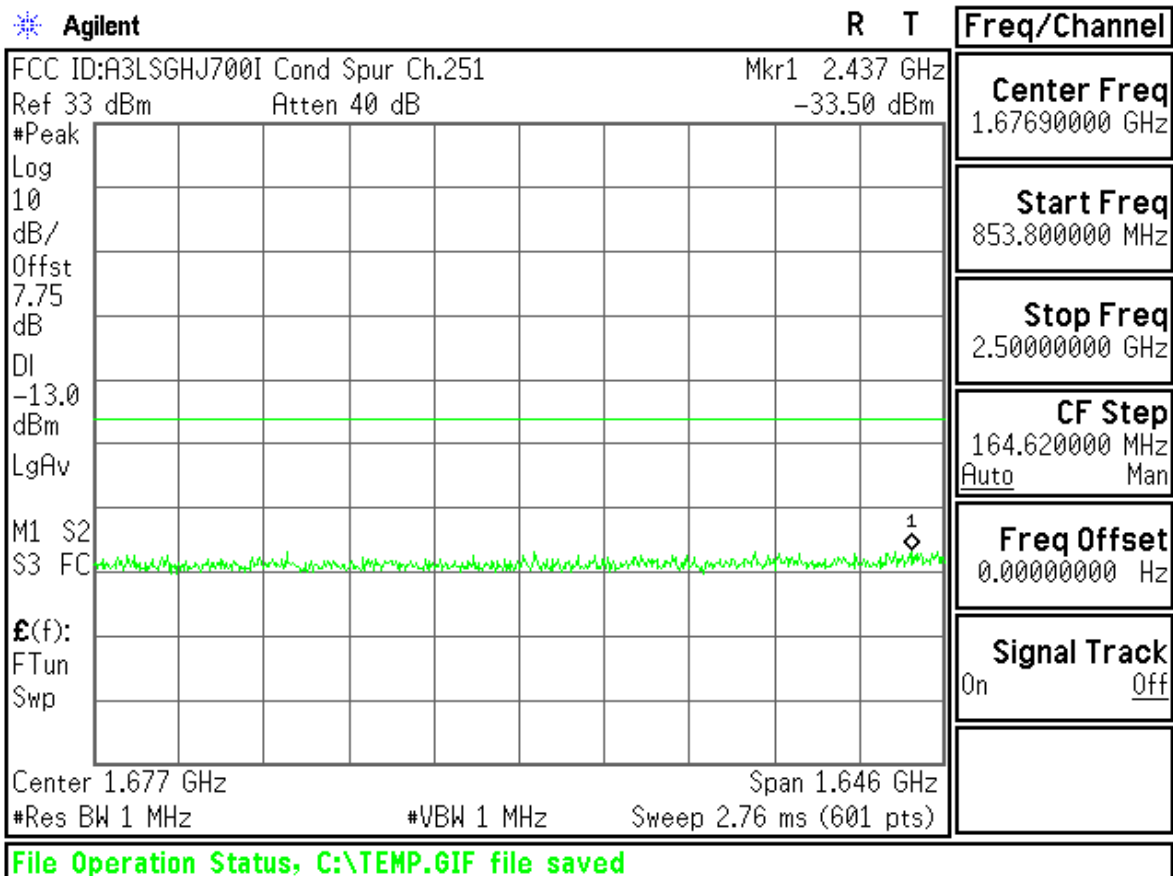

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

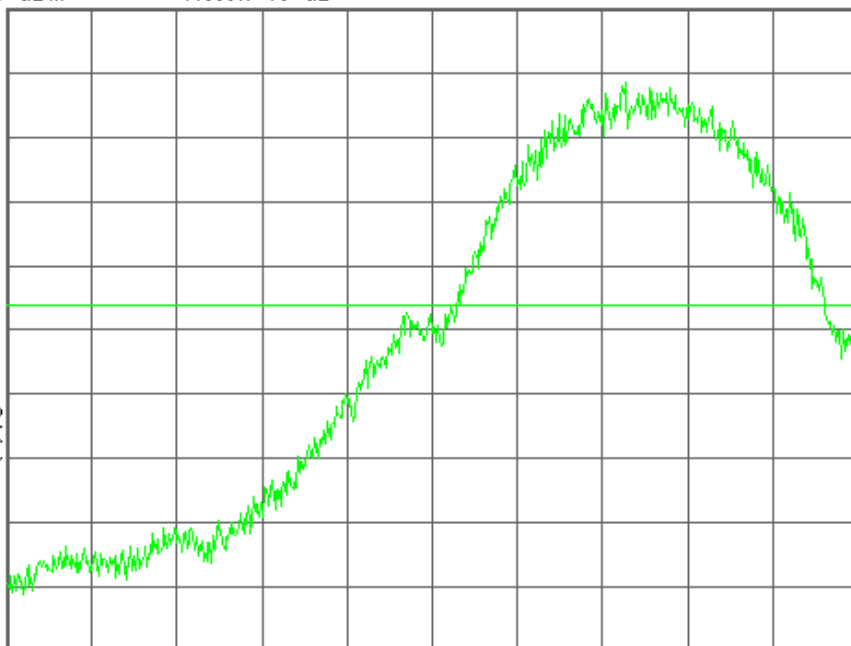

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.128

Mkr1 823.979 9 MHz

Ref 33 dBm

Atten 40 dB

-14.14 dBm

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

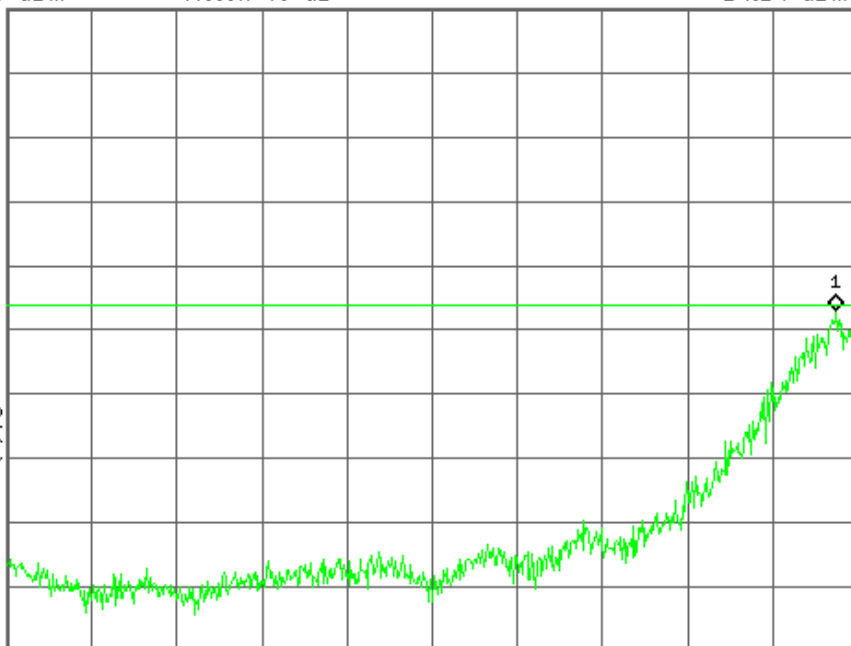

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

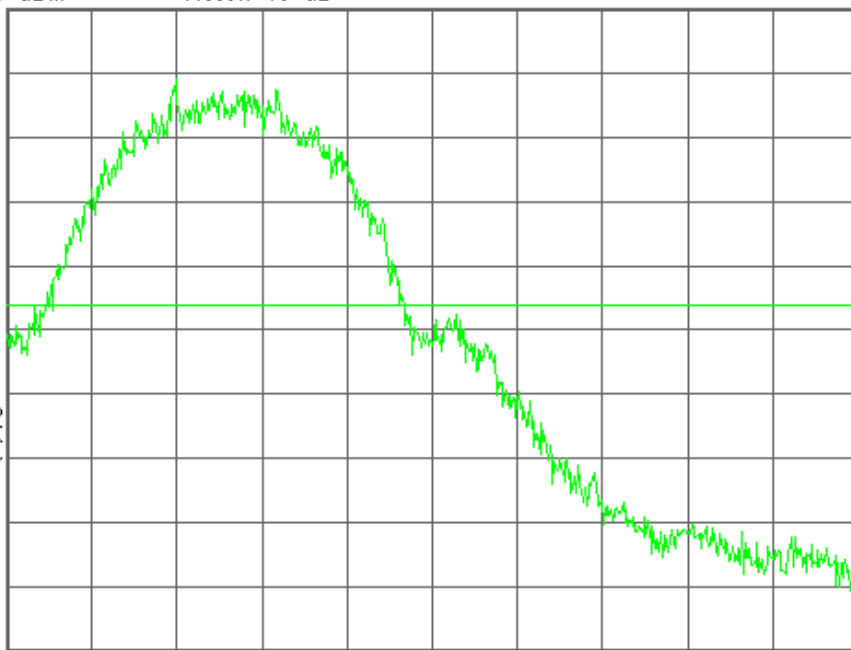

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.251

Mkr1 849.002 7 MHz

Ref 33 dBm

Atten 40 dB

-14.51 dBm

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

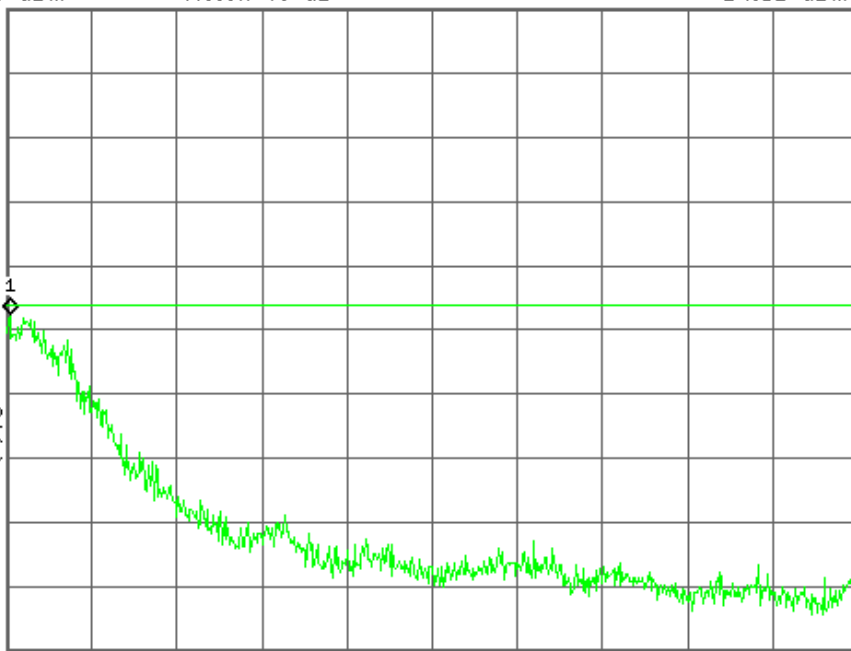

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900


Agilent


R T

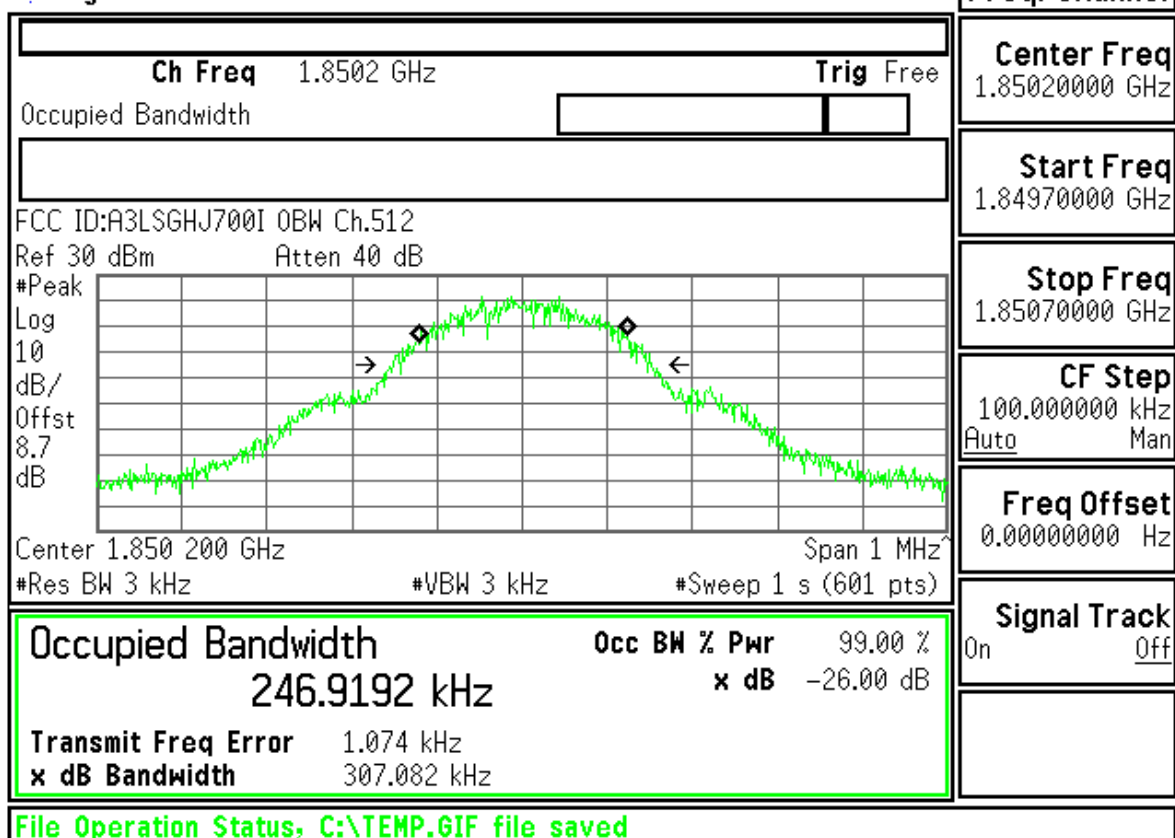

Agilent

R T

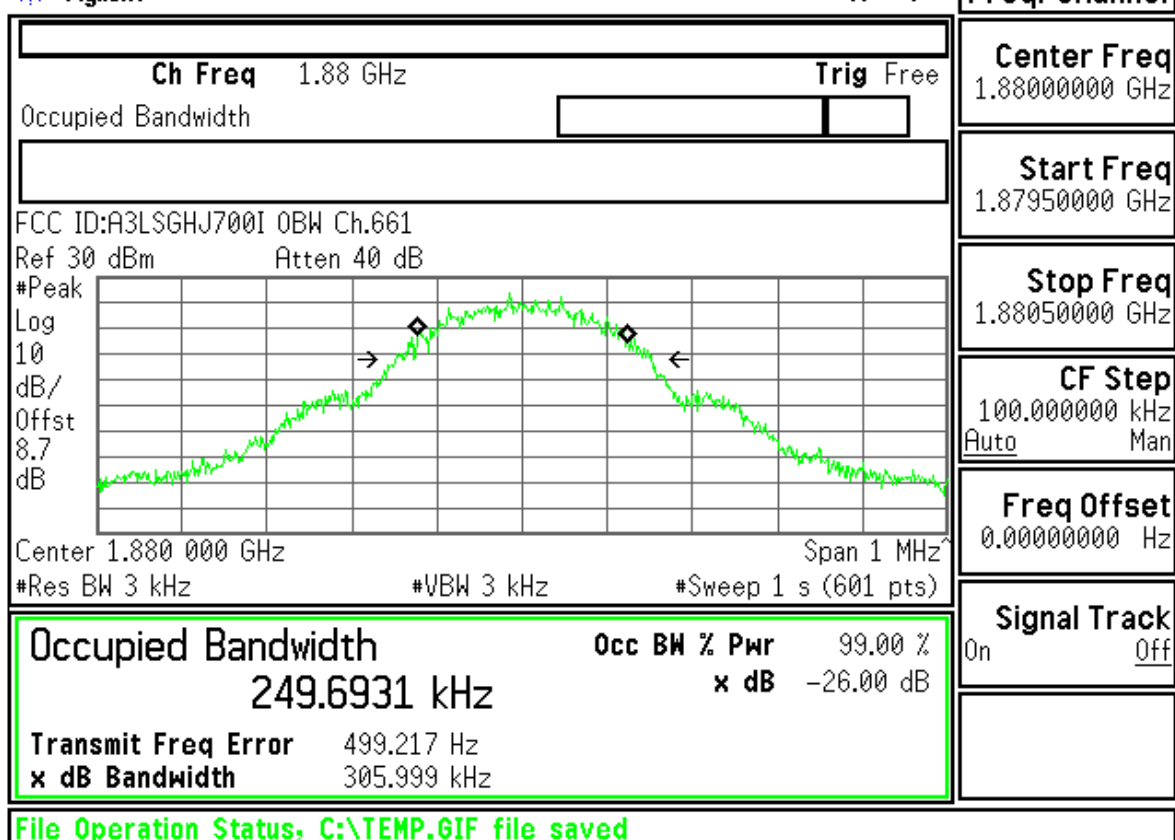


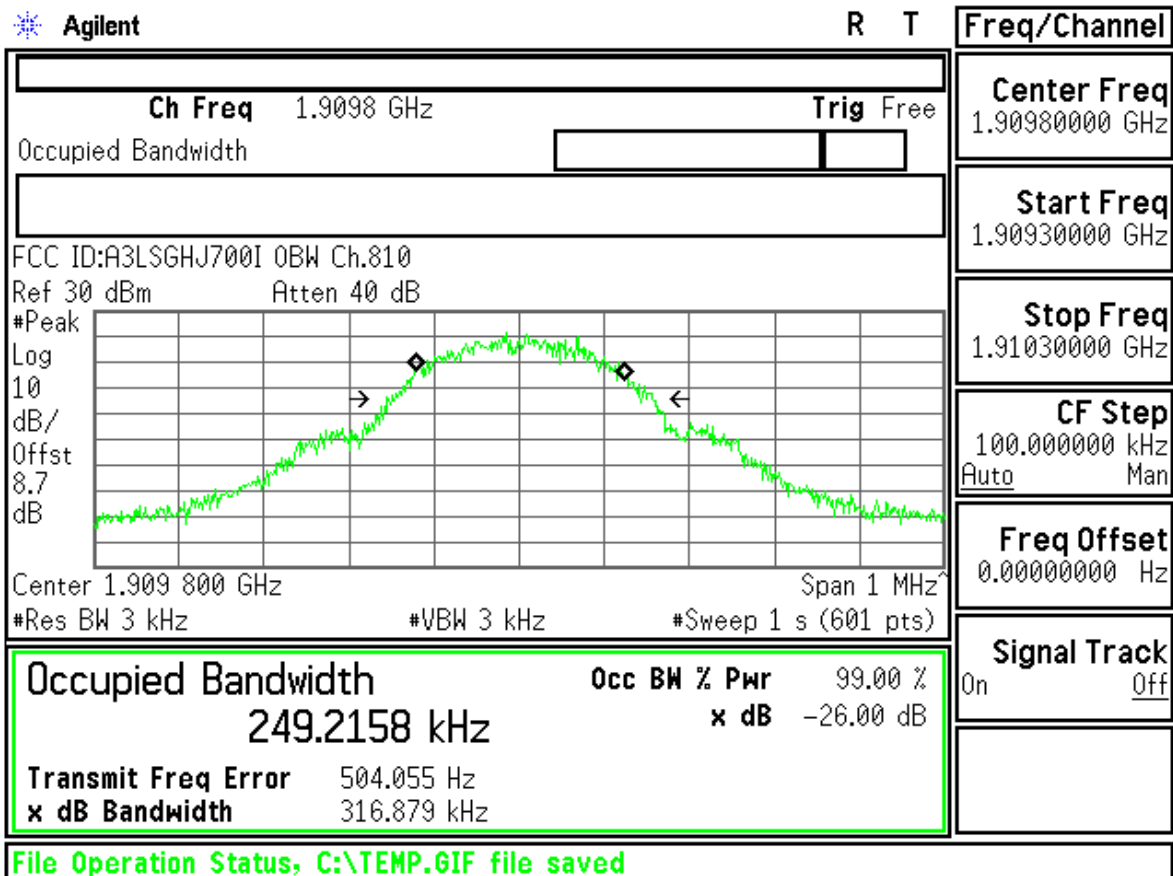




FCC ID : A3LSGHJ700I Transmit Power 512CH



Measurement/Instrument Screen																																				
Control		Transmit Power							TCH Parms																											
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.76</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.76</td><td>----</td><td>----</td><td>----</td></tr></table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.76	----	----	----	Estimated Carrier Power	29.76	----	----	----	Downlink Traffic Power												
										Burst 1	Burst 2	Burst 3	Burst 4																							
									Burst Power	29.76	----	----	----																							
									Estimated Carrier Power	29.76	----	----	----																							
		Traffic Band																																		
PCS																																				
Swap Window Positions		<table><tr><td colspan="2">Peak Phase °</td><td colspan="2">RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td>3.48</td><td>1.43</td><td colspan="2">-37.86</td></tr><tr><td>Maximum</td><td>5.12</td><td>1.73</td><td colspan="2">-7.62</td></tr><tr><td>Average</td><td>4.07</td><td>1.56</td><td colspan="2">-19.97</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td colspan="2">Pass</td></tr></table> 50 / 50							Peak Phase °		RMS Phase °		Frequency Hz		Minimum	3.48	1.43	-37.86		Maximum	5.12	1.73	-7.62		Average	4.07	1.56	-19.97		Pass/Fail	Pass	Pass	Pass		Traffic Channel	
									Peak Phase °		RMS Phase °		Frequency Hz																							
									Minimum	3.48	1.43	-37.86																								
									Maximum	5.12	1.73	-7.62																								
		Average	4.07	1.56	-19.97																															
Pass/Fail	Pass	Pass	Pass																																	
512																																				
MS TX Level																																				
0																																				
1 of 2		<table><tr><td colspan="2">Active Cell Connected</td><td colspan="2">Sys Type: GSM</td></tr><tr><td colspan="4"></td></tr><tr><td></td><td>IntRef</td><td>Offset</td><td>R T</td><td></td><td></td><td></td></tr></table>							Active Cell Connected		Sys Type: GSM							IntRef	Offset	R T				Channel Mode Setup												
									Active Cell Connected		Sys Type: GSM																									
										IntRef	Offset	R T																								
		Return																																		
1 of 2																																				

Measurement/Instrument Screen																															
Control		Transmit Power								TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.75</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.75</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.75	----	----	----	Estimated Carrier Power	29.75	----	----	----	Downlink Traffic Power ▾						
											Burst 1	Burst 2	Burst 3	Burst 4																	
										Burst Power	29.75	----	----	----																	
		Estimated Carrier Power	29.75	----	----	----																									
		Traffic Band																													
PCS																															
Swap Window Positions		Single								Traffic Channel																					
										661																					
										MS TX Level																					
		0																													
		Channel Mode Setup ▾																													
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.36</td> <td>1.42</td> <td>-48.49</td> </tr> <tr> <td>Maximum</td> <td>5.12</td> <td>1.66</td> <td>-18.88</td> </tr> <tr> <td>Average</td> <td>3.94</td> <td>1.52</td> <td>-33.85</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.36	1.42	-48.49	Maximum	5.12	1.66	-18.88	Average	3.94	1.52	-33.85	Pass/Fail	Pass	Pass	Pass	Return	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	3.36	1.42	-48.49																		
		Maximum	5.12	1.66	-18.88																										
		Average	3.94	1.52	-33.85																										
Pass/Fail	Pass	Pass	Pass																												
50 / 50																															
Single																															
Active Cell Connected		Sys Type: GSM																													
IntRef Offset R T		1 of 2																													

Measurement/Instrument Screen																															
Control		Transmit Power								TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.42</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.42</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.42	----	----	----	Estimated Carrier Power	29.42	----	----	----	Downlink Traffic Power ▾						
											Burst 1	Burst 2	Burst 3	Burst 4																	
										Burst Power	29.42	----	----	----																	
		Estimated Carrier Power	29.42	----	----	----																									
		Traffic Band																													
PCS																															
Swap Window Positions		Single								Traffic Channel																					
										810																					
										MS TX Level																					
		0																													
		Channel Mode Setup ▾																													
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.23</td> <td>1.27</td> <td>-14.15</td> </tr> <tr> <td>Maximum</td> <td>5.43</td> <td>1.58</td> <td>15.42</td> </tr> <tr> <td>Average</td> <td>3.88</td> <td>1.44</td> <td>-2.75</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.23	1.27	-14.15	Maximum	5.43	1.58	15.42	Average	3.88	1.44	-2.75	Pass/Fail	Pass	Pass	Pass	Return	
											Peak Phase °	RMS Phase °	Frequency Hz																		
										Minimum	3.23	1.27	-14.15																		
		Maximum	5.43	1.58	15.42																										
		Average	3.88	1.44	-2.75																										
Pass/Fail	Pass	Pass	Pass																												
50 / 50																															
Single																															
Active Cell Connected		Sys Type: GSM																													
IntRef Offset R T		1 of 2																													

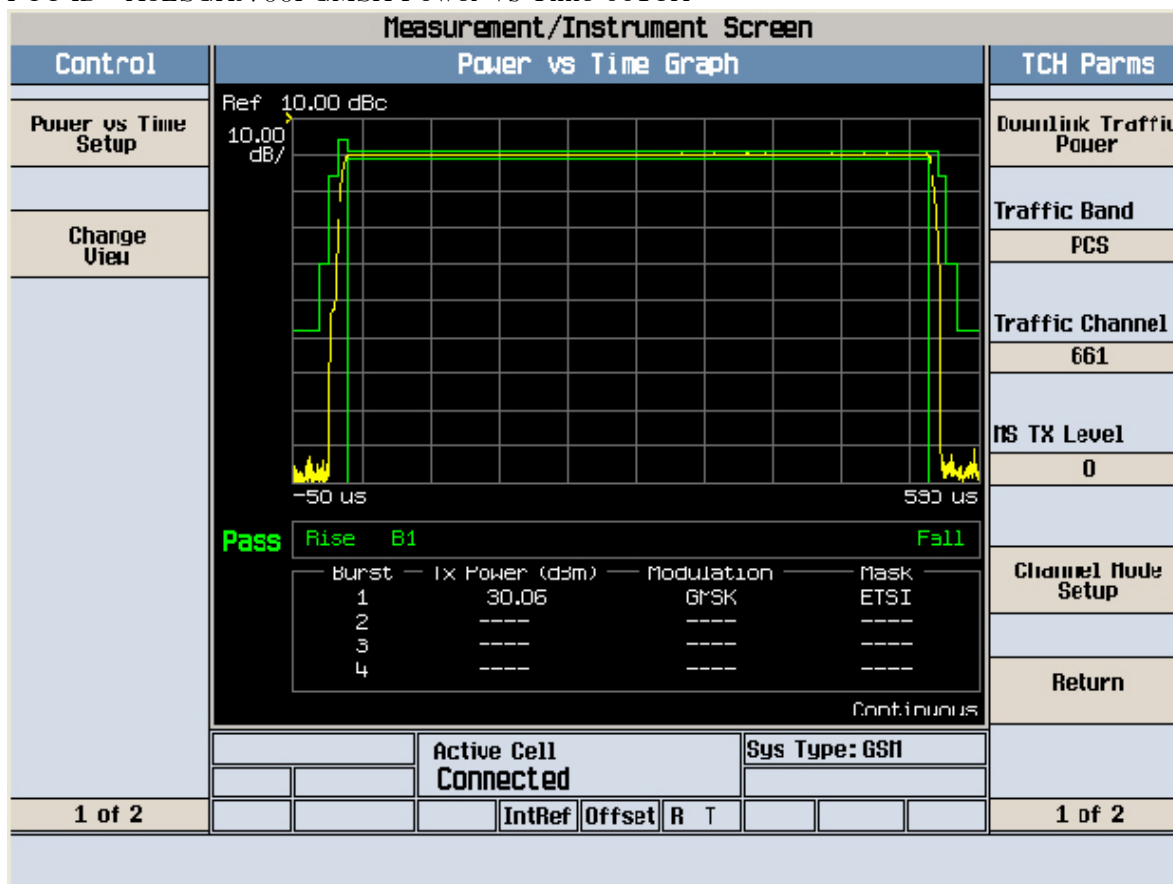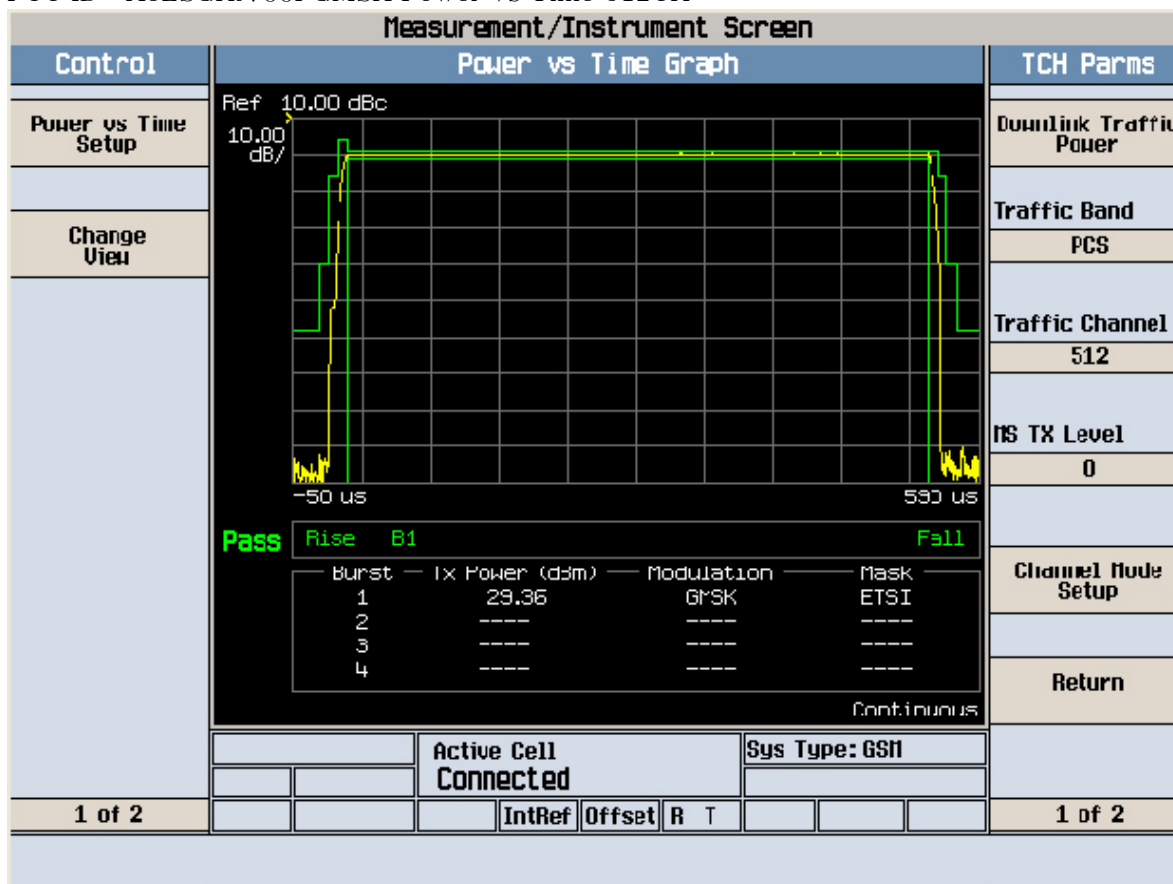

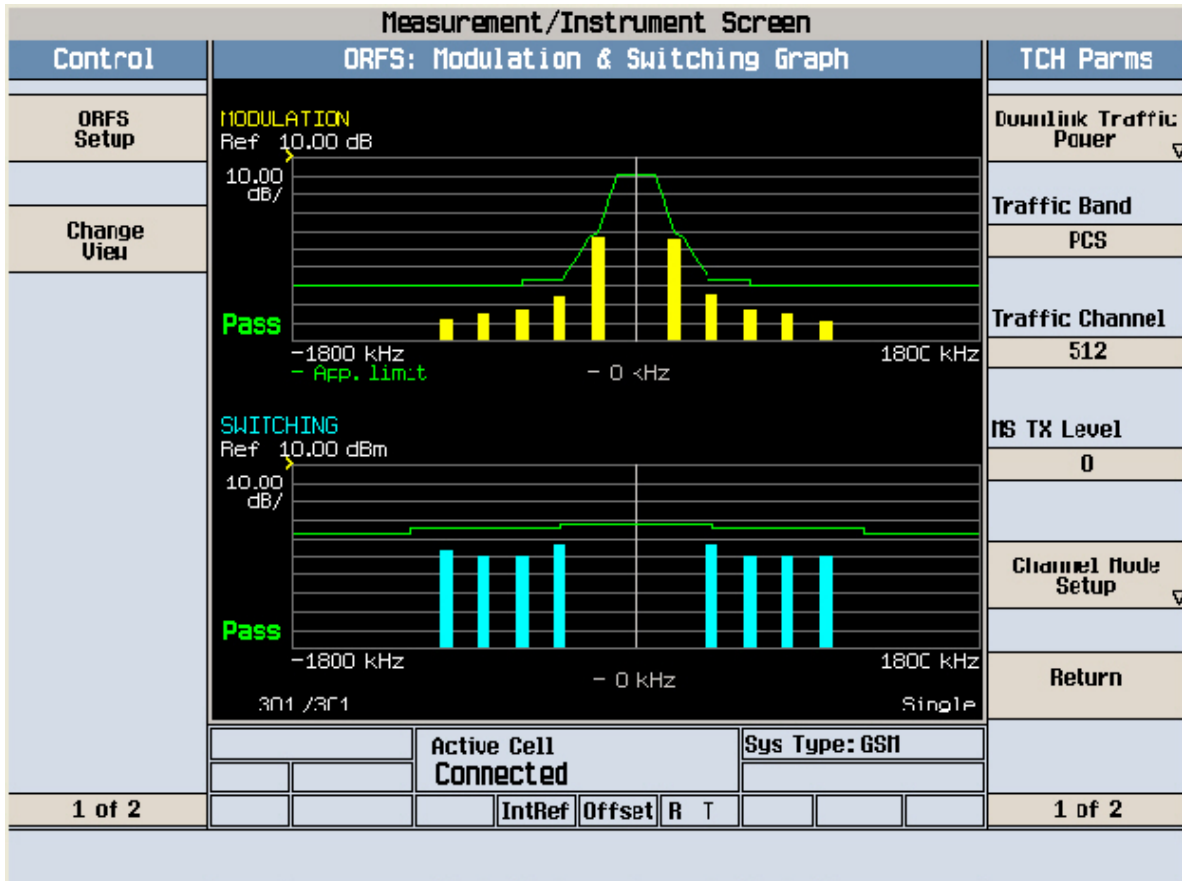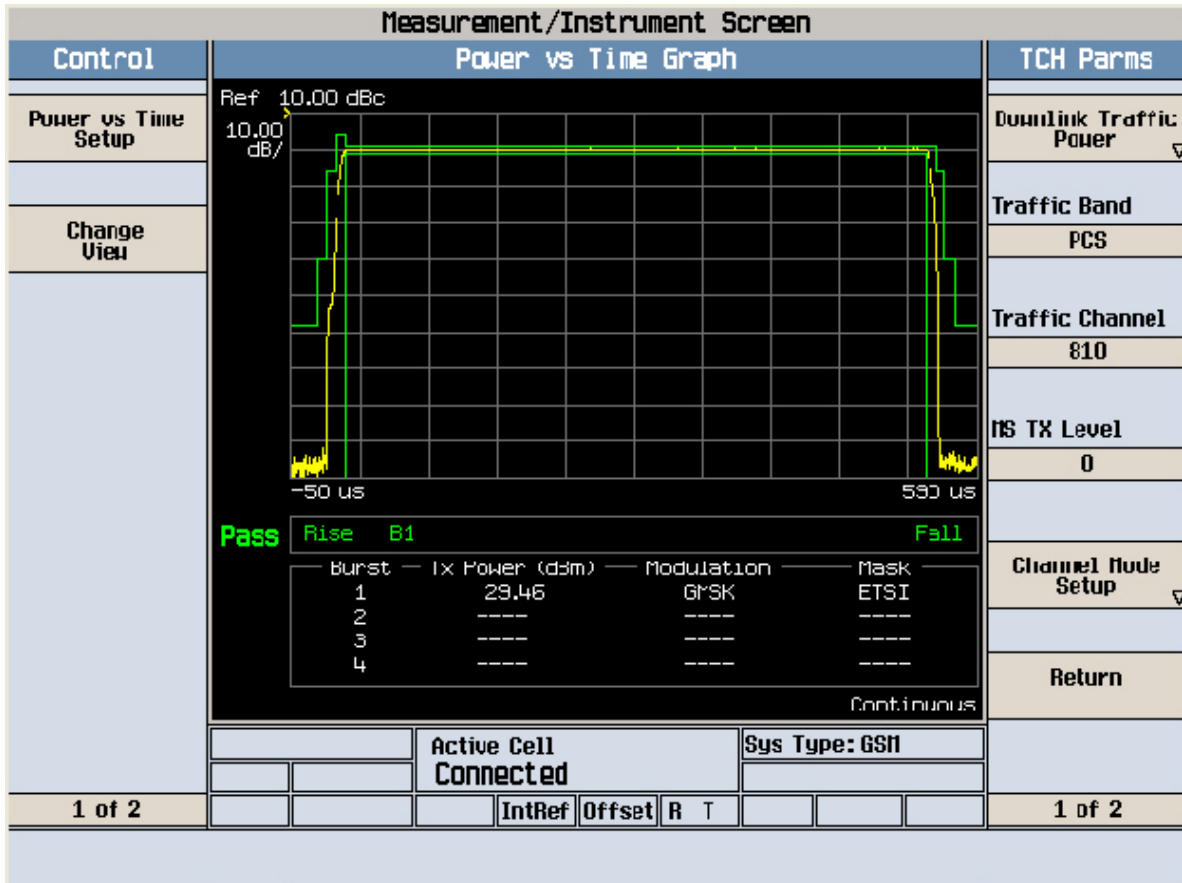

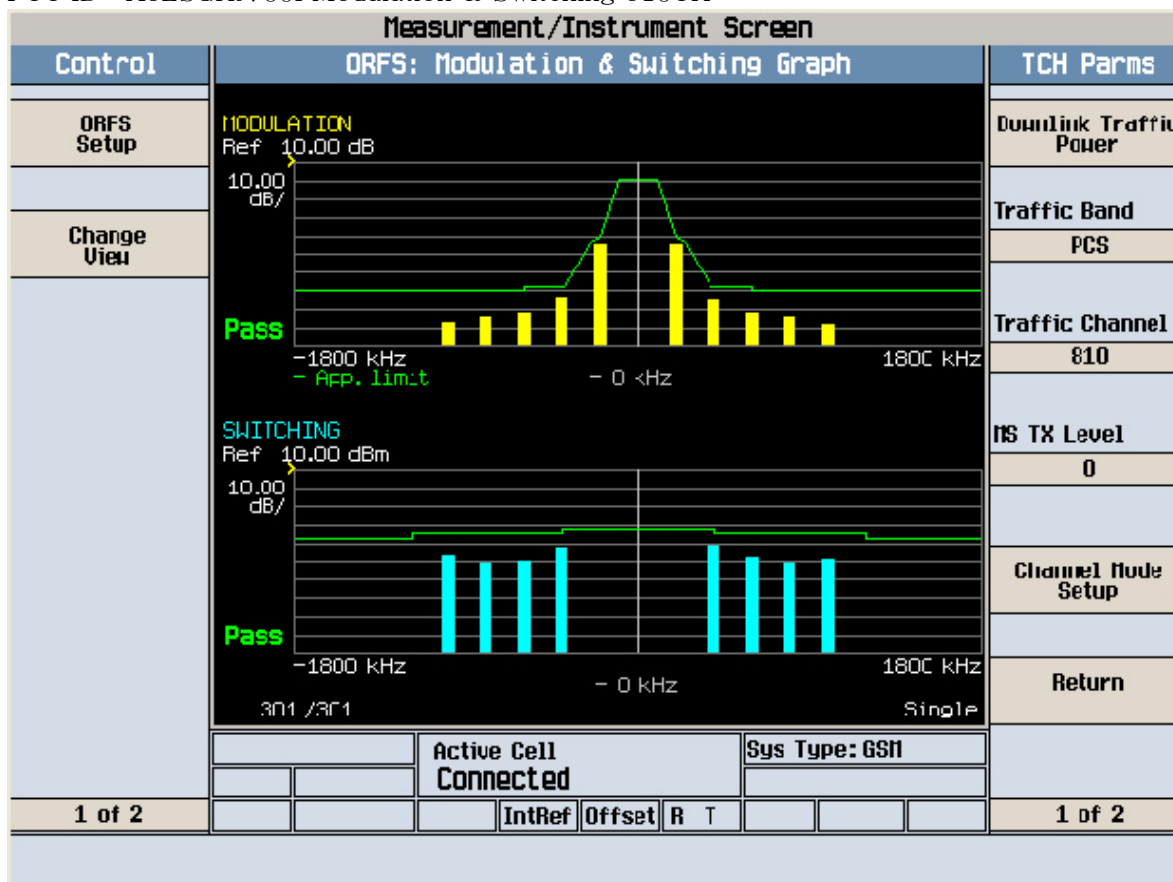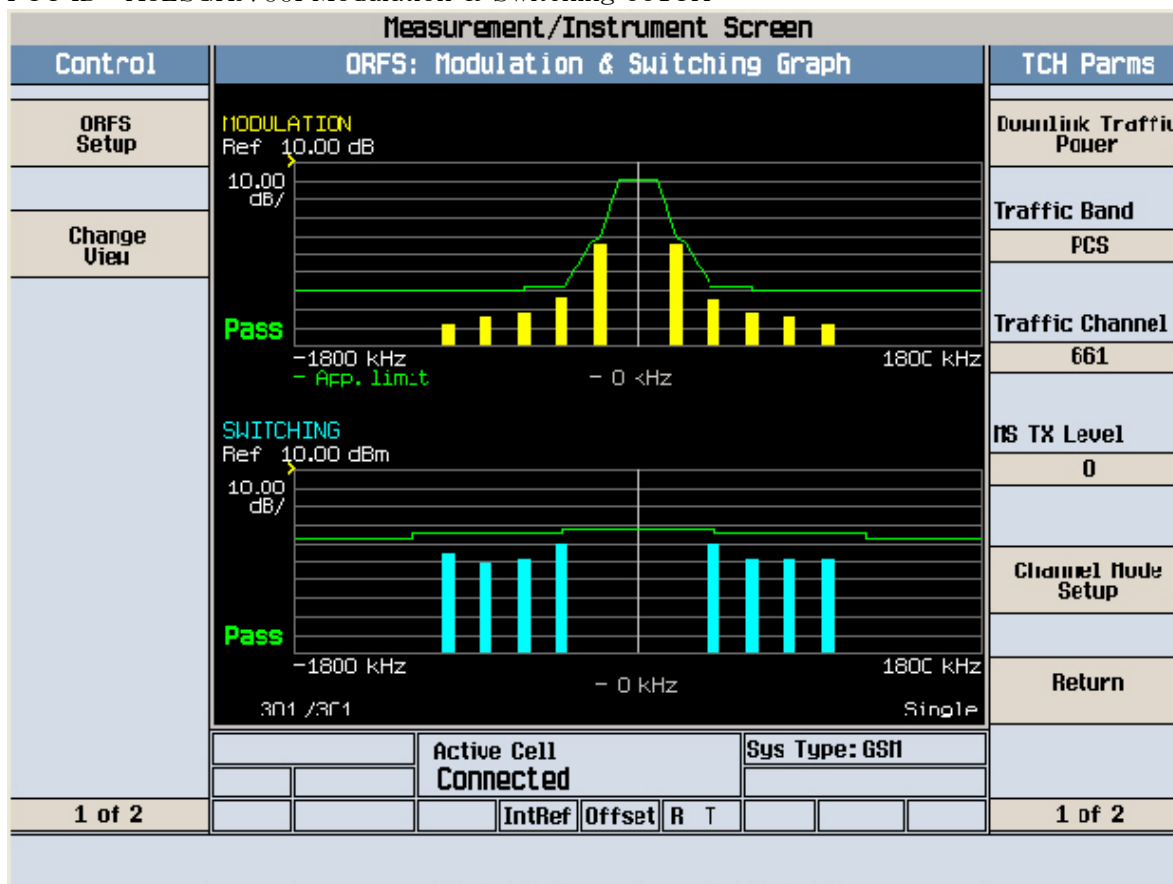

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.512

Mkr1 716 MHz

Ref 30 dBm

Atten 40 dB

-32.34 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

926.350000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.84270000 GHz

CF Step

183.270000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

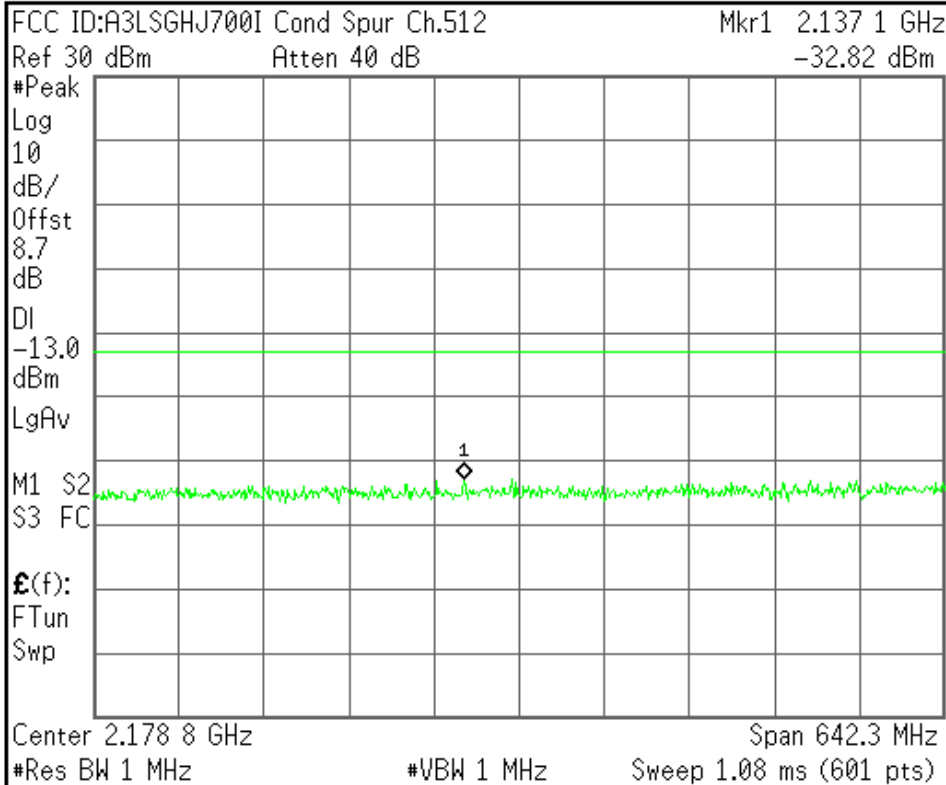

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

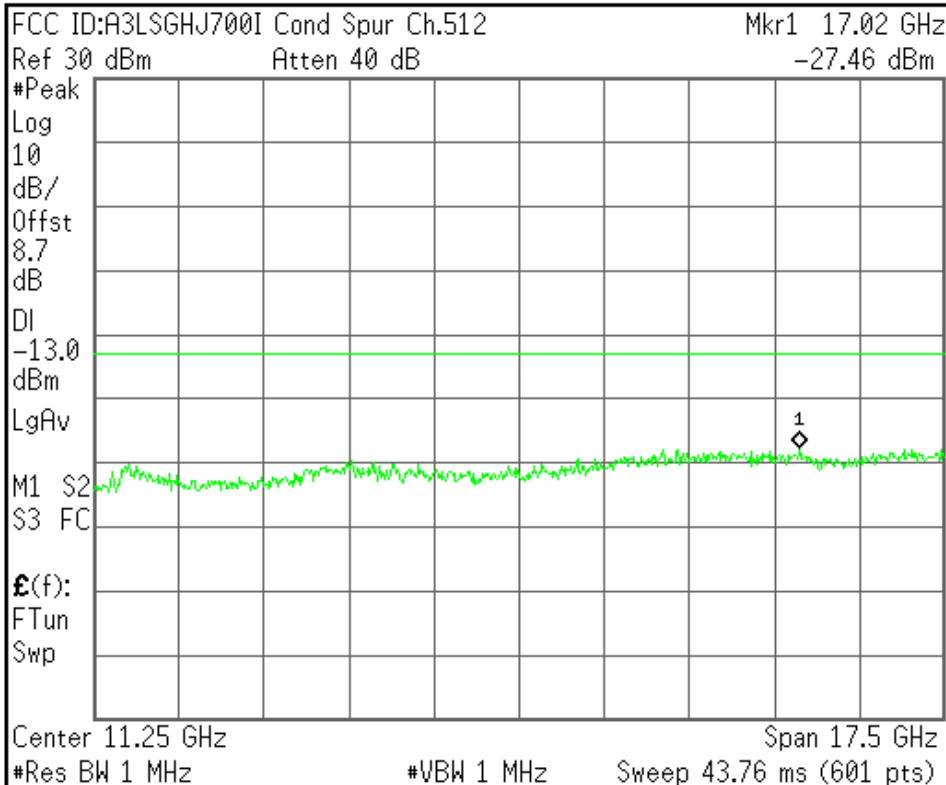

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.661

Mkr1 348 MHz

Ref 30 dBm

Atten 40 dB

-32.58 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

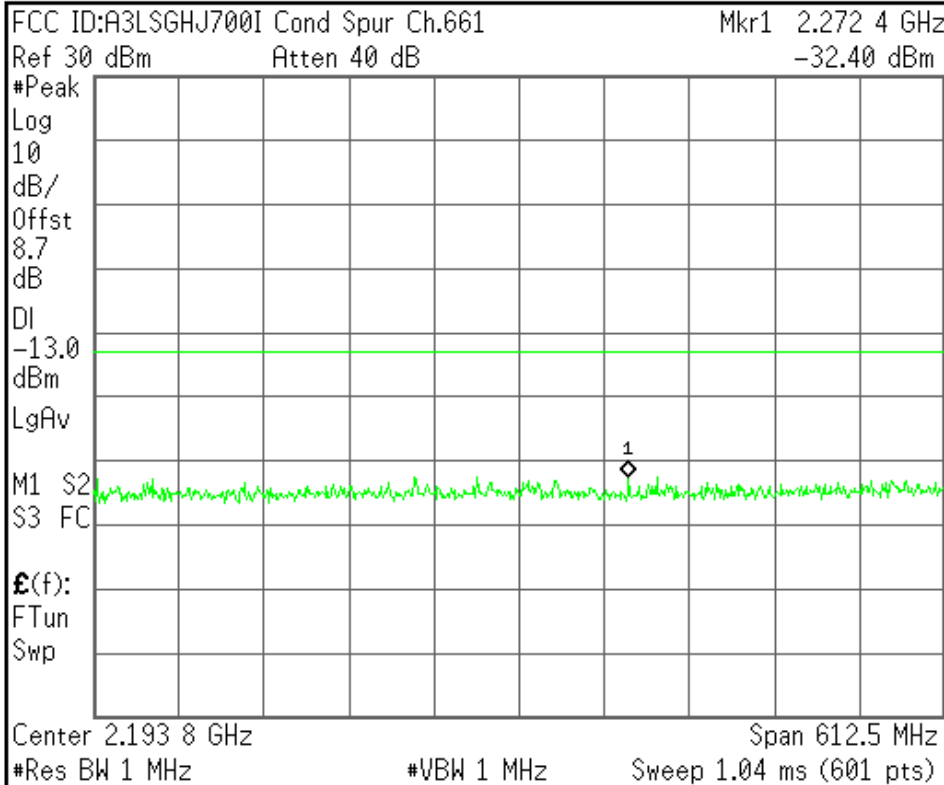

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

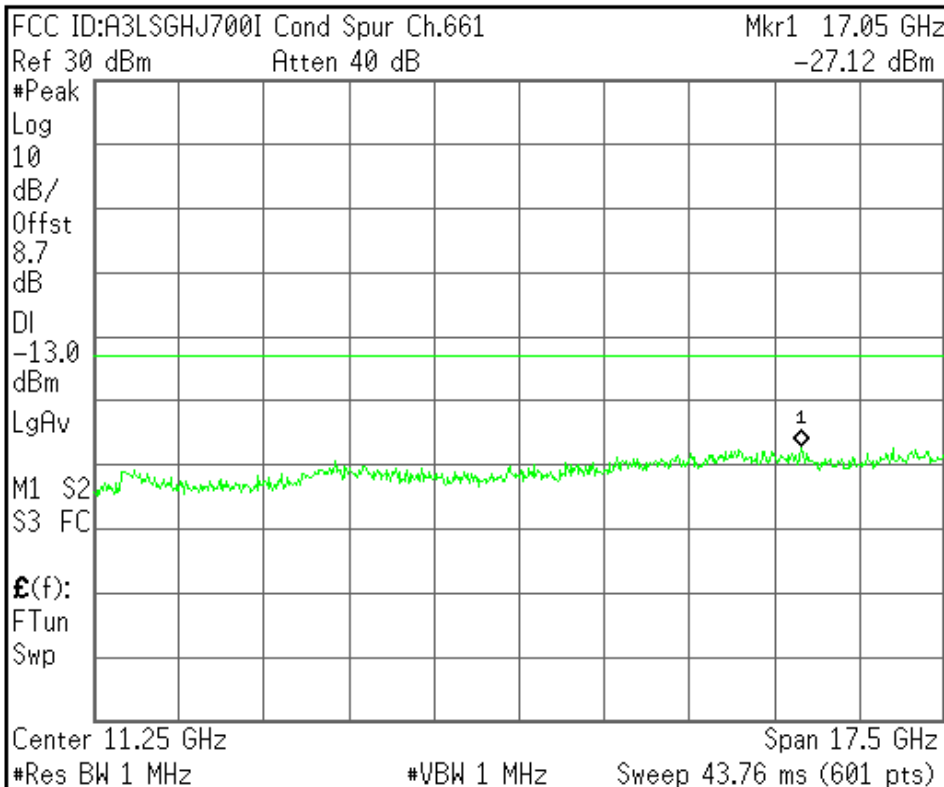

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Cond Spur Ch.810

Mkr1 370 MHz

Ref 30 dBm

Atten 40 dB

-32.71 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

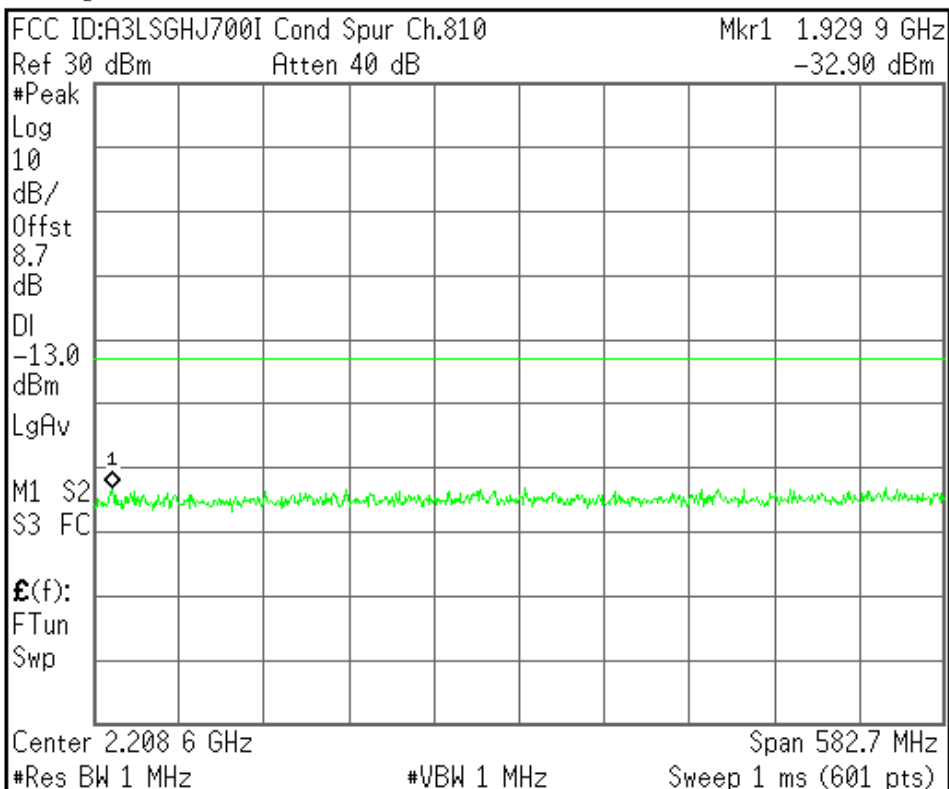

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

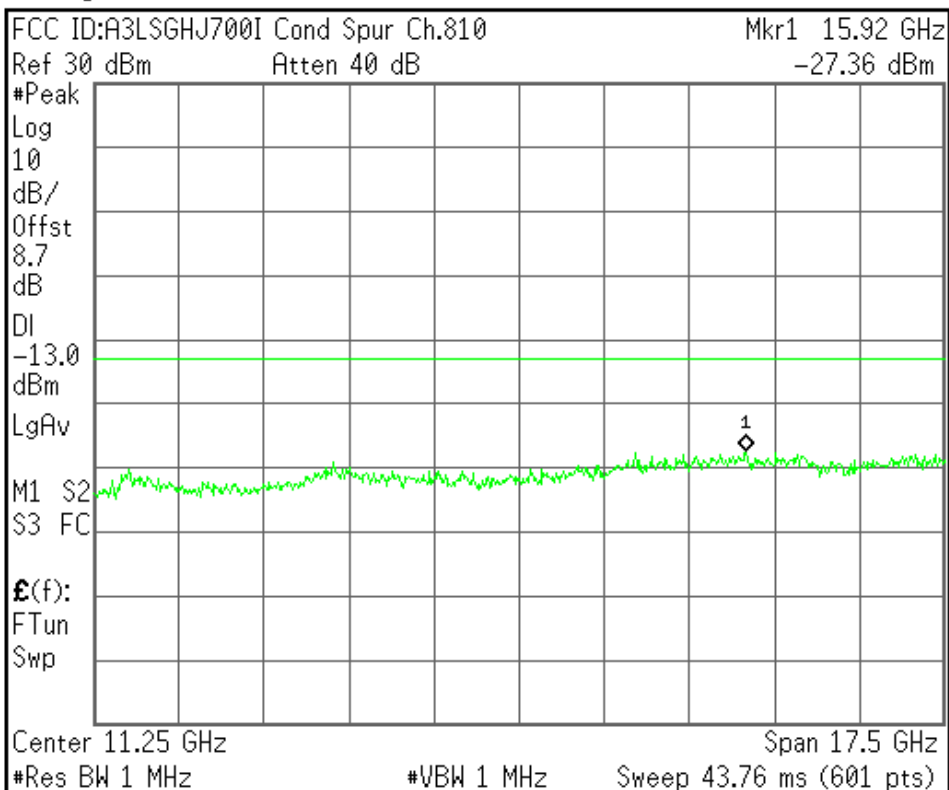

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

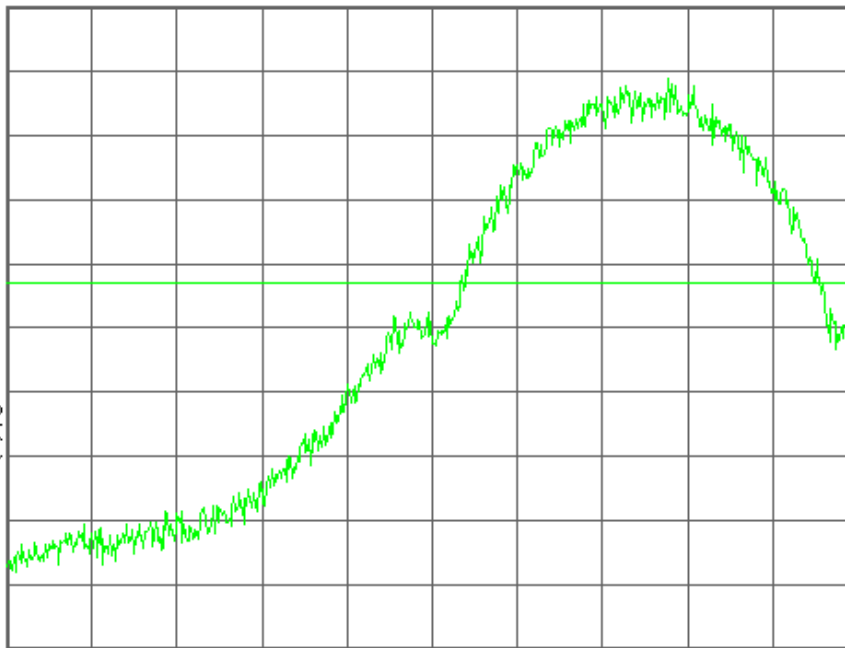

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.512

Mkr1 1.849 981 3 GHz

Ref 30 dBm

Atten 40 dB

-17.20 dBm

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

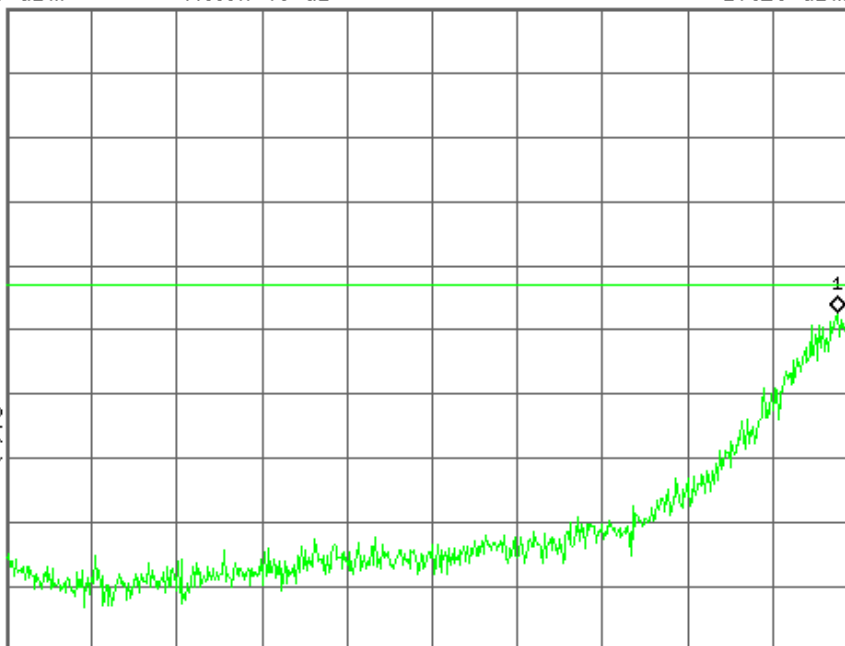

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

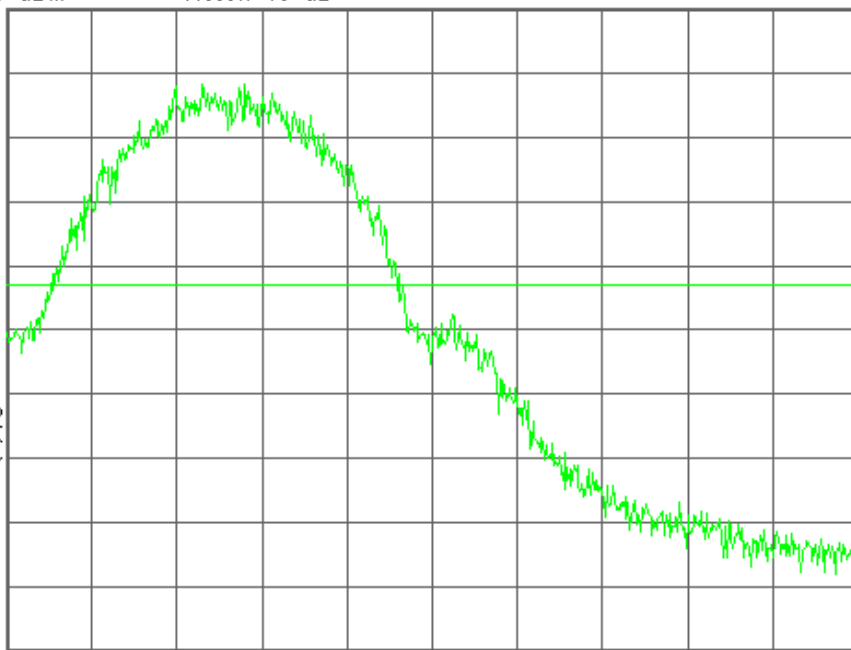

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I Band Edge Ch.810

Mkr1 1.910 021 8 GHz

Ref 30 dBm

Atten 40 dB

-17.91 dBm

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

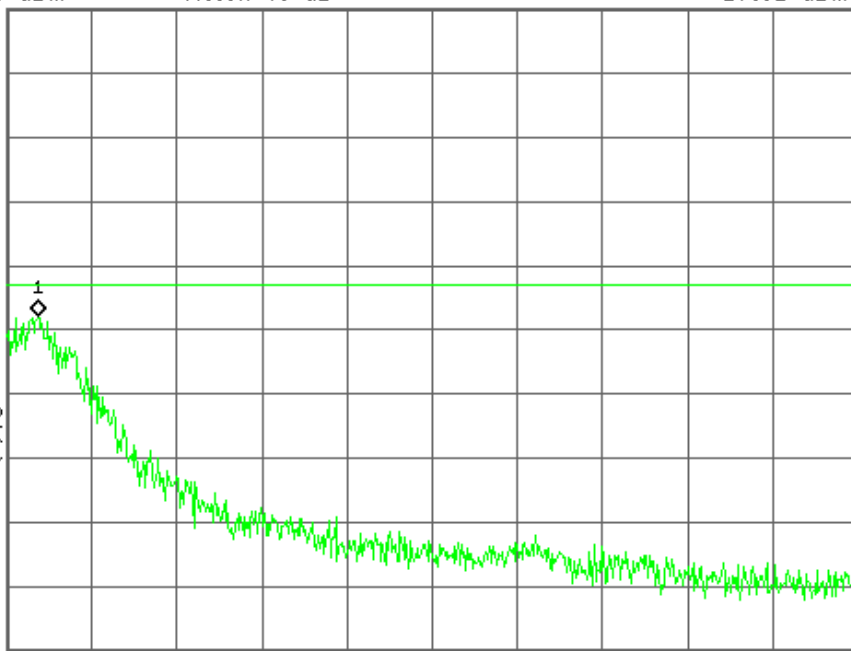

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHJ700I P.A.R Ch.661

▲ Mkr1 0 Hz

Ref 33.95 dBm

Atten 40 dB

-0.05 dB

#Peak

Log

10

dB/

Offst

8.7

dB

#LgAv


V1 V2

S3 FC

£(f):

FTun

Swp

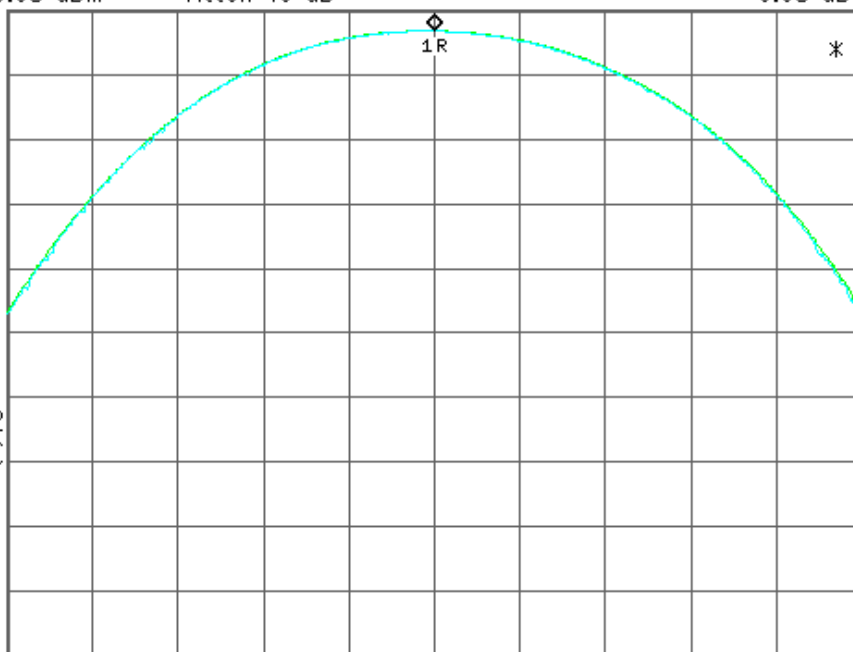

Center 1.880 00 GHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
1.88000000 GHz

Start Freq
1.87500000 GHz

Stop Freq
1.88500000 GHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies