



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **SGH-X686**
FCC ID(Requested) : **A3LSGHX686**
Report No : **FD-105-R1**
Job No : **FD-105**
Date issued : **June 19, 2006**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part22, Part24.

Prepared By

Date

2006.06.19

JW LEE – Test Engineer

Checked By

Date

2006.06.19

WW JANG – Manager

Authorized By

Date

2006.06.19

SH PARK – Senior Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Occupied Bandwidth	10
5.4. Spurious and Harmonic Emission at Antenna Terminal	10
5.4.1. Occupied Bandwidth Emission Limits	10
5.4.2. Conducted Spurious Emission	12
5.5. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Effective Radiated Power (E.R.P.)	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph	21
6.7.3. GSM1900 Frequency Stability Table	23
6.7.4. GSM1900 Frequency Stability Graph	24
7. CONCLUSION	26
8. TEST PLOTS	27



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHX686
- Quantity : Quantity production is planned
- Emission Designators : 245KGXW(GSM850), 239KG7W(GSM850 EDGE)
247KGXW(GSM1900), 236KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 1.968 W ERP GSM850 (32.94dBm)
1.371 W EIRP GSM1900 (31.37dBm)
0.887 W ERP GSM850 EDGE(29.48dBm)
0.875 W EIRP GSM1900 EDGE(29.42dBm)
- FCC Classification(s) : Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : June 10-11, 2006
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FD-105-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.

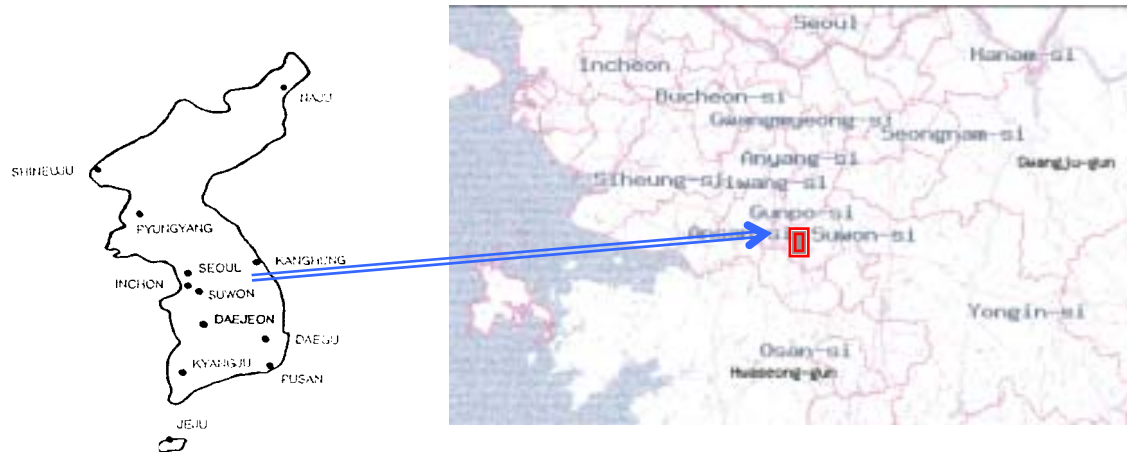


Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

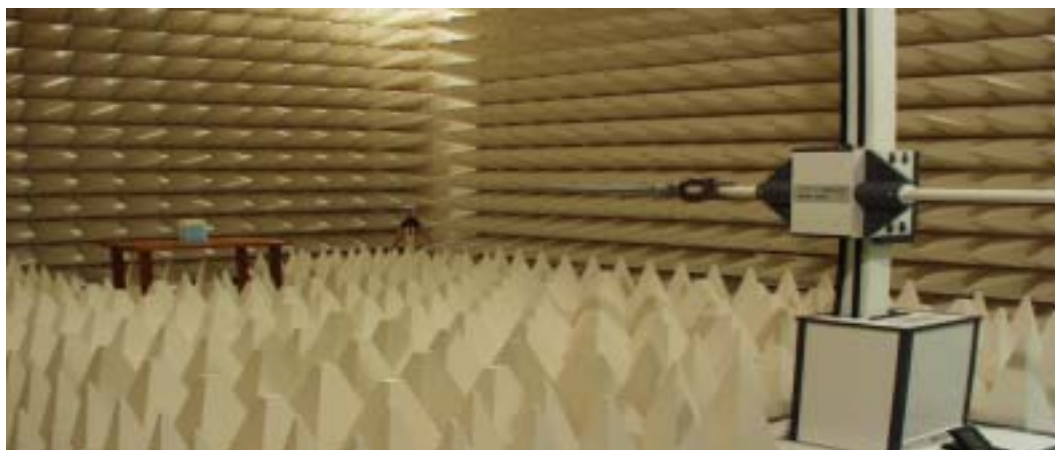


Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2006-09-26
	E4440A(3Hz~26.5GHz)	MY41000236	2007-04-14
	E4440A(3Hz~26.5GHz)	MY41000233	2007-04-05
Signal Generator	SMIQ03B	83824/021	2006-12-07
	SMR20	835197/030	2007-01-10
Power Meter	E4419B	GB41293846	2006-09-07
Power Sensor	8481B	3318A10325	2006-09-08
	8485A	3318A19924	2006-09-08
Amplifier	5S1G4	304866	2006-10-18
Pre-Amplifier	8449B	3008A00691	2007-01-02
Communication test set	8960	GB42230535	2007-01-02
	8960	GB42360886	2007-02-28
Antenna Master	MA240	240/618	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	SH-241	92000548	2006-11-22
	SH-241	92000549	2006-11-22
Horn Antenna	HF906	360306/011	2007-03-31
Dipole Antenna	3121C-DB4	9007-587	2006-12-02
Receive Antenna	HL040	353255/019	2006-08-24
	HL040	353255/020	2006-06-21
Attenuator	8494A	3308A31997	2006-12-19
	8496A	3308A14426	2006-12-21
Divider	11636B	51941	Not Required
	11636B	51942	Not Required
	11636B	51946	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK3.5/18G-10SS	4	Not Required
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

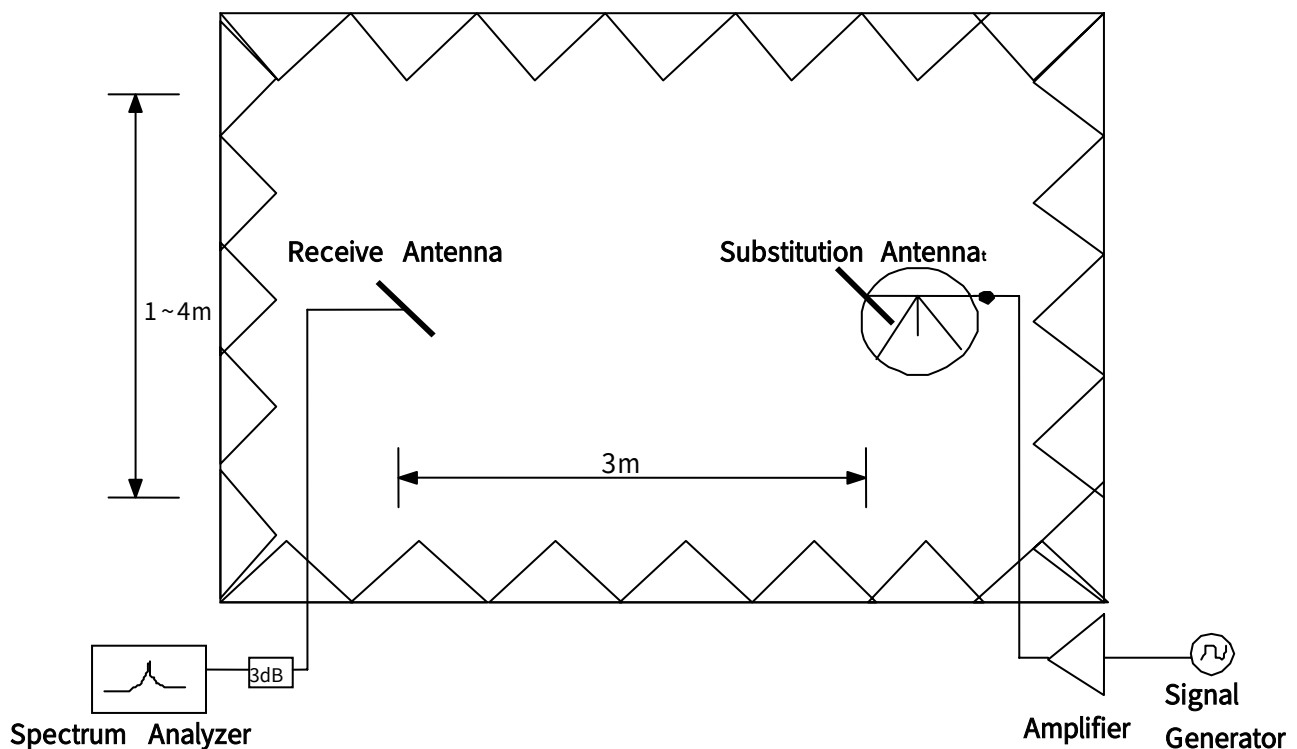


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001

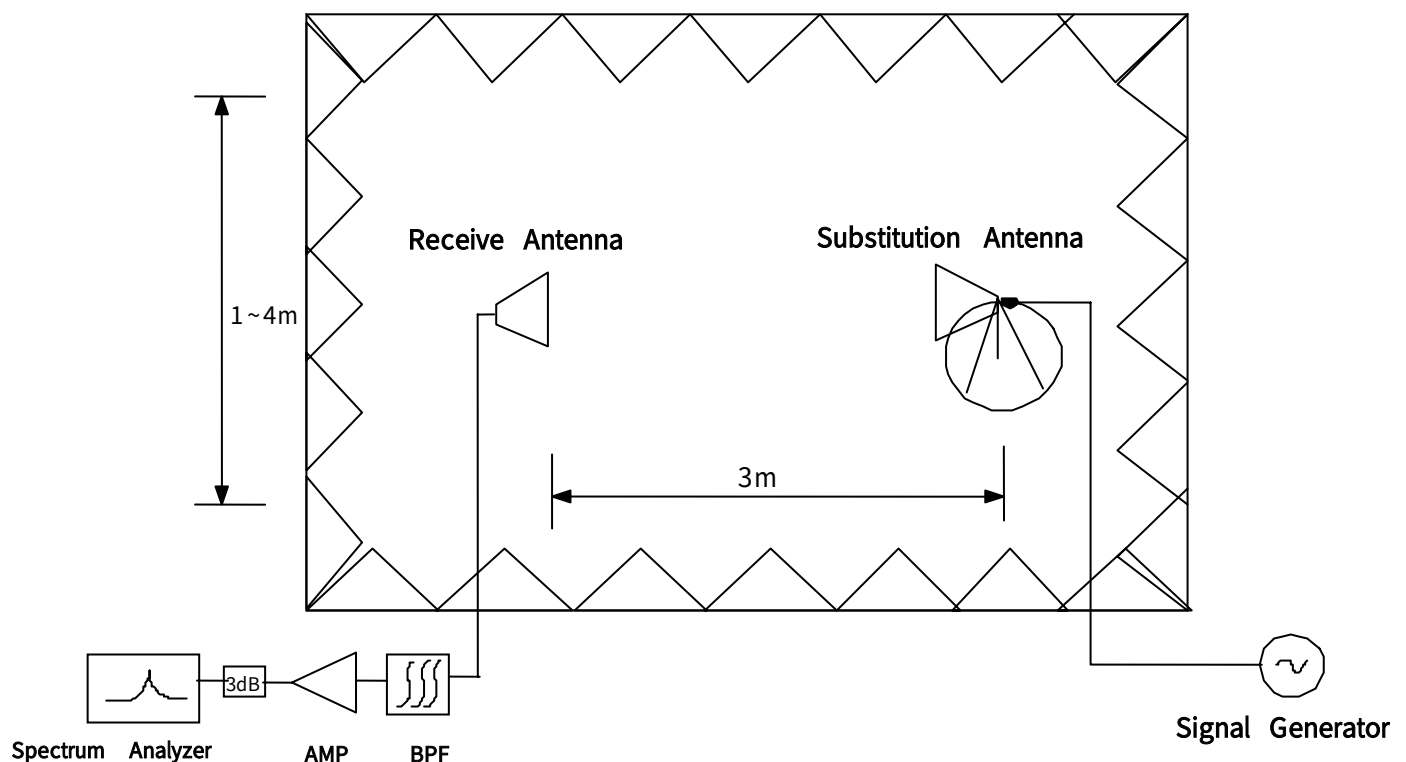


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.4. Spurious and Harmonic Emission at Antenna Terminal

5.4.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.4.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (1.968 \text{ W}) = 45.94 \text{ dB}$$

$$32.94 \text{ dBm} - 45.94 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.5. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
824.20	25.00	H	-14.19	0.00	-14.19
		V	-12.52	0.00	-12.52
836.60	25.00	H	-14.19	0.00	-14.19
		V	-12.52	0.00	-12.52
848.80	25.00	H	-14.19	0.00	-14.19
		V	-12.52	0.00	-12.52

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-6.91	H1	179	32.28	1.690	Standard
836.60	-6.25	H1	174	32.94	1.968	Standard
848.80	-6.30	H1	180	32.89	1.945	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
836.60	-9.71	H1	185	29.48	0.887	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	27.00	H	-14.21	8.13	-22.34
		V	-14.26	8.13	-22.39
1880.00	27.00	H	-14.66	8.11	-22.77
		V	-14.67	8.11	-22.78
1909.80	27.00	H	-14.26	8.33	-22.59
		V	-14.38	8.33	-22.71

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-17.97	H1	110	31.37	1.371	Standard
1880.00	-18.70	H1	106	31.07	1.279	Standard
1909.80	-18.84	H1	106	30.75	1.189	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.92	H1	103	29.42	0.875	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 32.94 dBm = 1.968 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 45.94 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-48.25	H1	69.09
	3	2472.60	-50.75	H1	65.86
	4	3296.80	-56.48	H2	67.12
	5	4121.00	-57.89	H2	65.35
	6	4945.20	-64.9	H1	68.51
	7	5769.40	-66.12	H2	68.07
190	2	1673.20	-49.34	H1	69.97
	3	2509.80	-53.21	H1	68.34
	4	3346.40	-56.54	H2	68.25
	5	4183.00	-57.54	H2	65.51
	6	5019.60	-65.62	H1	69.30
	7	5856.20	-65.86	H2	68.13
251	2	1697.60	-50.11	H1	68.71
	3	2546.40	-52.41	H1	67.13
	4	3395.20	-57.05	H2	68.70
	5	4244.00	-60.78	H2	69.30
	6	5092.80	-67.18	H2	69.77
	7	5941.60	-66.93	H1	69.02

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 31.37 dBm = 1.371 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 44.37 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-56.09	H2	60.12
	3	5550.60	-64	H1	63.20
	4	7400.80	-69.37	H2	64.45
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-54.7	H2	59.39
	3	5640.00	-66	H1	65.41
	4	7520.00	-68.76	H2	64.35
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-57.36	H2	61.44
	3	5729.40	-65.58	H1	64.64
	4	7639.20	-68.85	H1	62.75
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2006. 06. 10

Test Engineer : JW LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Rx Cable loss + HPF Insertion loss + Attenuator
- ④ Pre-Amp gain
- ⑤ Air loss
- ⑥ Tested Level from EUT
- ⑦ = ⑥ + ⑤ + ③ - ④
- ⑧ = ERP - ⑦

CH	Har	Frequency (MHz)	① Tx CL (dB)	② Horn Gain (dB)	Tx Level @ (S/G 10dBm)	⑥ Tested Level EUT : H (dBm)	⑥ Tested Level EUT : V (dBm)	⑦ Amplitude of Emission EUT : H (dBm)	⑦ Amplitude of Emission EUT : V (dBm)	⑧ Result EUT : H (dBc)	⑧ Result EUT : V (dBc)
128	2	1648.40	7.70	8.25	0.55	-48.25	-51.71	-34.01	-37.65	69.09	72.73
	3	2472.60	9.92	9.58	-0.34	-50.75	-59.24	-30.78	-39.08	65.86	74.16
	4	3296.80	11.67	9.67	-2.00	-56.48	-61.60	-32.04	-36.56	67.12	71.64
	5	4121.00	13.24	10.59	-2.65	-57.89	-59.68	-30.27	-32.34	65.35	67.42
	6	4945.20	14.53	11.00	-3.53	-64.90	-66.52	-33.43	-36.26	68.51	71.34
	7	5769.40	16.87	11.36	-5.51	-66.12	-66.48	-32.99	-33.99	68.07	69.07
190	2	1673.20	7.80	8.25	0.45	-49.34	-50.94	-34.89	-36.67	69.97	71.75
	3	2509.80	10.06	9.58	-0.48	-53.21	-59.93	-33.26	-39.55	68.34	74.63
	4	3346.40	11.45	9.67	-1.78	-56.54	-59.31	-33.17	-35.12	68.25	70.20
	5	4183.00	13.72	10.59	-3.13	-57.54	-61.69	-30.43	-34.71	65.51	69.79
	6	5019.60	15.43	11.00	-4.43	-65.62	-67.35	-34.22	-36.47	69.30	71.55
	7	5856.20	17.19	11.36	-5.83	-65.86	-66.64	-33.05	-34.30	68.13	69.38
251	2	1697.60	7.96	8.25	0.29	-50.11	-49.88	-33.63	-33.98	68.71	69.06
	3	2546.40	10.15	9.58	-0.57	-52.41	-57.35	-32.05	-36.90	67.13	71.98
	4	3395.20	11.62	9.67	-1.95	-57.05	-58.31	-33.62	-33.89	68.70	68.97
	5	4244.00	13.71	10.59	-3.12	-60.78	-61.49	-34.22	-34.41	69.30	69.49
	6	5092.80	15.71	11.00	-4.71	-67.18	-67.46	-34.69	-36.40	69.77	71.48
	7	5941.60	17.09	11.36	-5.73	-66.93	-66.13	-33.94	-34.20	69.02	69.28

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2006. 06. 10

Test Engineer : JW LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Rx Cable loss + HPF Insertion loss + Attenuator
- ④ Pre-Amp gain
- ⑤ Air loss
- ⑥ Tested Level from EUT
- ⑦ = ⑥ + ⑤ + ③ - ④
- ⑧ = EIRP - ⑦

CH	Har	Frequency (MHz)	① Tx CL (dB)	② Horn Gain (dB)	Tx Level @ (S/G 10dBm)	⑥ Tested Level EUT : H (dBm)	⑥ Tested Level EUT : V (dBm)	⑦ Amplitude of Emission EUT : H (dBm)	⑦ Amplitude of Emission EUT : V (dBm)	⑧ Result EUT : H (dBc)	⑧ Result EUT : V (dBc)
512	2	3700.40	12.22	9.62	7.40	-56.09	-57.64	-28.75	-30.24	60.12	61.61
	3	5550.60	16.91	11.05	4.14	-64.00	-66.51	-31.83	-35.45	63.20	66.82
	4	7400.80	20.66	11.70	1.04	-69.37	-68.70	-33.08	-34.34	64.45	65.71
	5	9251.00	24.06	12.38	-1.68	-	-	-	-	-	-
	6	11101.20	27.70	13.52	-4.18	-	-	-	-	-	-
	7	12951.40	31.86	13.03	-8.83	-	-	-	-	-	-
661	2	3760.00	12.40	9.62	7.22	-54.70	-59.06	-28.02	-32.01	59.39	63.38
	3	5640.00	16.83	11.05	4.22	-66.00	-66.72	-34.04	-35.12	65.41	66.49
	4	7520.00	21.17	11.70	0.53	-68.76	-67.91	-32.98	-33.73	64.35	65.10
	5	9400.00	24.51	12.38	-2.13	-	-	-	-	-	-
	6	11280.00	28.38	13.52	-4.86	-	-	-	-	-	-
	7	13160.00	33.20	13.03	-10.17	-	-	-	-	-	-
810	2	3819.60	13.76	9.62	5.86	-57.36	-60.52	-30.07	-32.63	61.44	64.00
	3	5729.40	17.34	11.05	3.71	-65.58	-66.53	-33.27	-34.56	64.64	65.93
	4	7639.20	21.14	11.70	0.56	-68.85	-69.37	-31.38	-33.09	62.75	64.46
	5	9549.00	26.03	12.38	-3.65	-	-	-	-	-	-
	6	11458.80	28.52	13.52	-5.00	-	-	-	-	-	-
	7	13368.60	32.87	13.03	-9.84	-	-	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	10.79	836,600,011	0.000001	0.013
100%		-30	14.30	836,600,014	0.000002	0.017
100%		-20	12.06	836,600,012	0.000001	0.014
100%		-10	9.86	836,600,010	0.000001	0.012
100%		0	8.83	836,600,009	0.000001	0.011
100%		+10	9.51	836,600,010	0.000001	0.011
100%		+20	10.79	836,600,011	0.000001	0.013
100%		+30	11.07	836,600,011	0.000001	0.013
100%		+40	11.31	836,600,011	0.000001	0.014
100%		+50	10.64	836,600,011	0.000001	0.013
100%		+60	12.27	836,600,012	0.000001	0.015
85%	3.3	+20	49.55	836,600,050	0.000006	0.059
115%	4.26	+20	19.15	836,600,019	0.000002	0.023
Batt.Endpoint	3.3	+20	49.55	836,600,050	0.000006	0.059


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

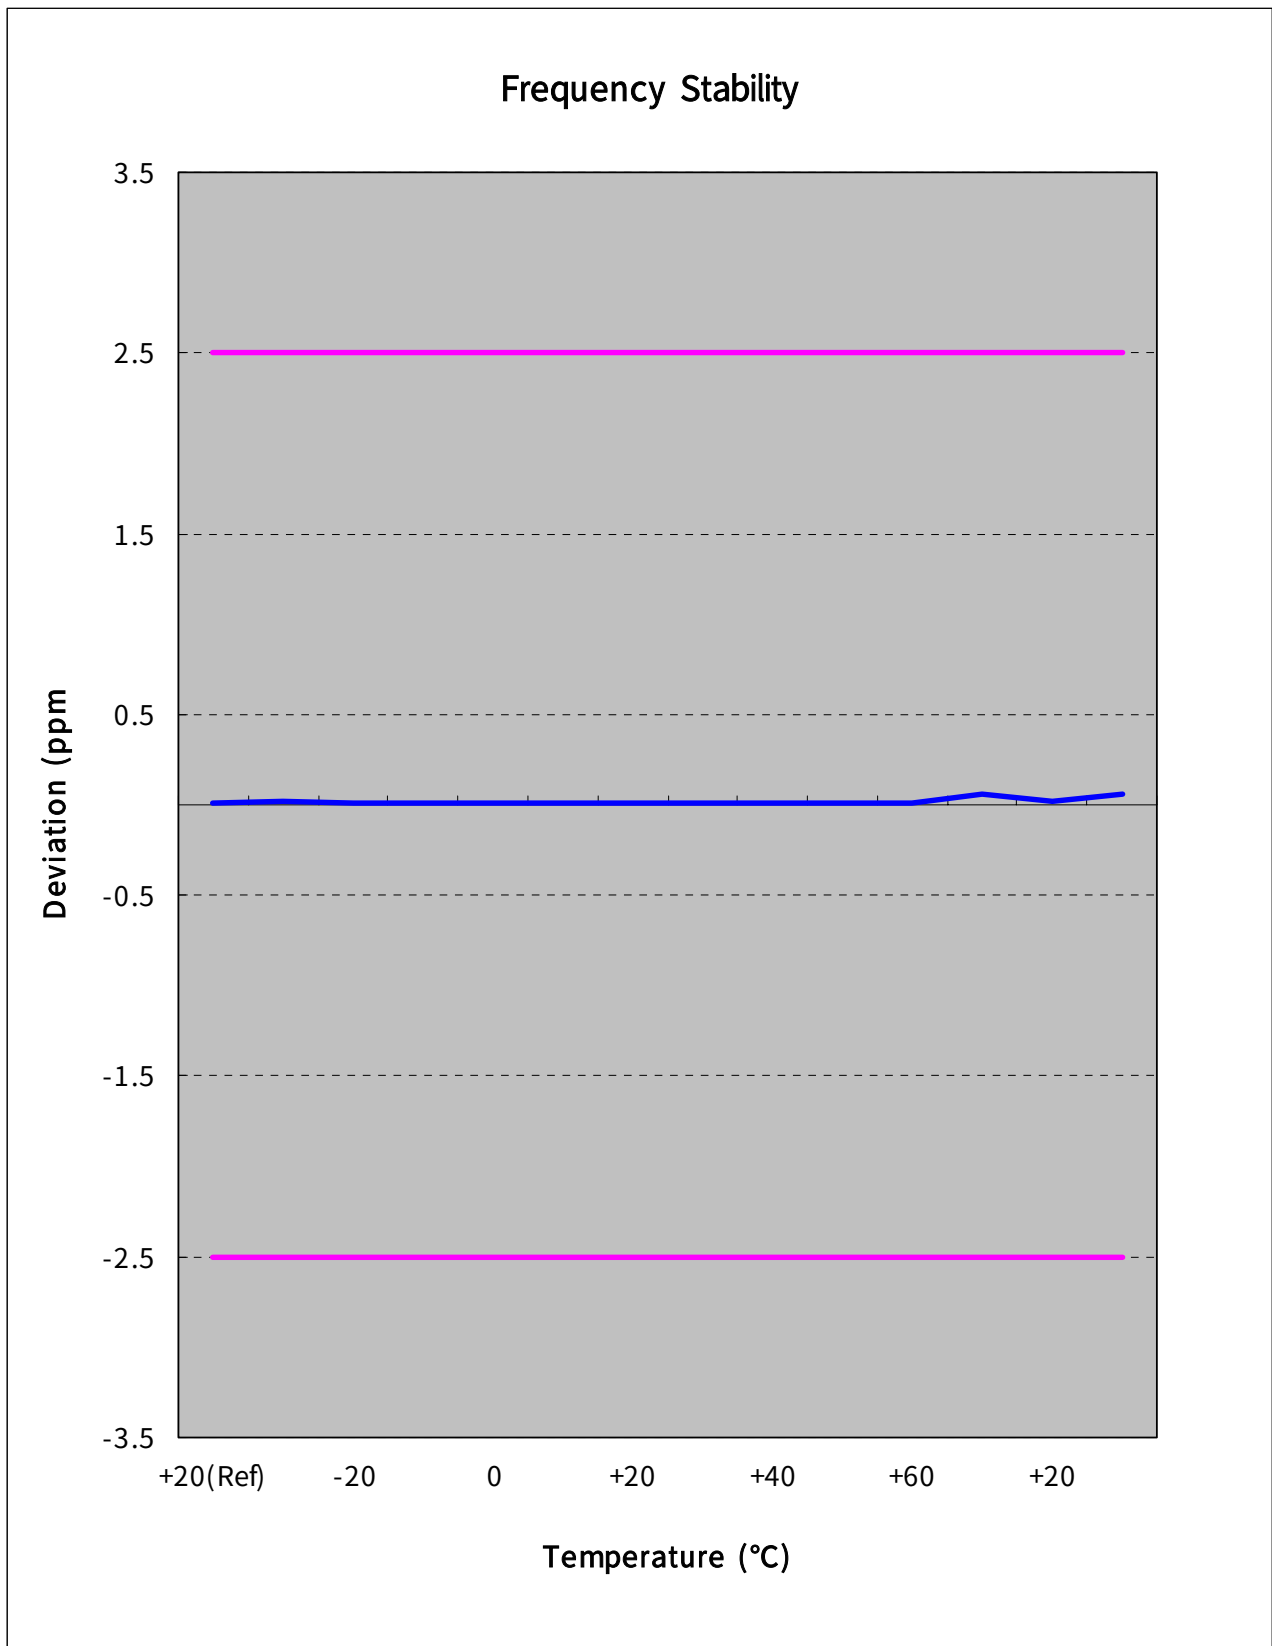

Zoom IN

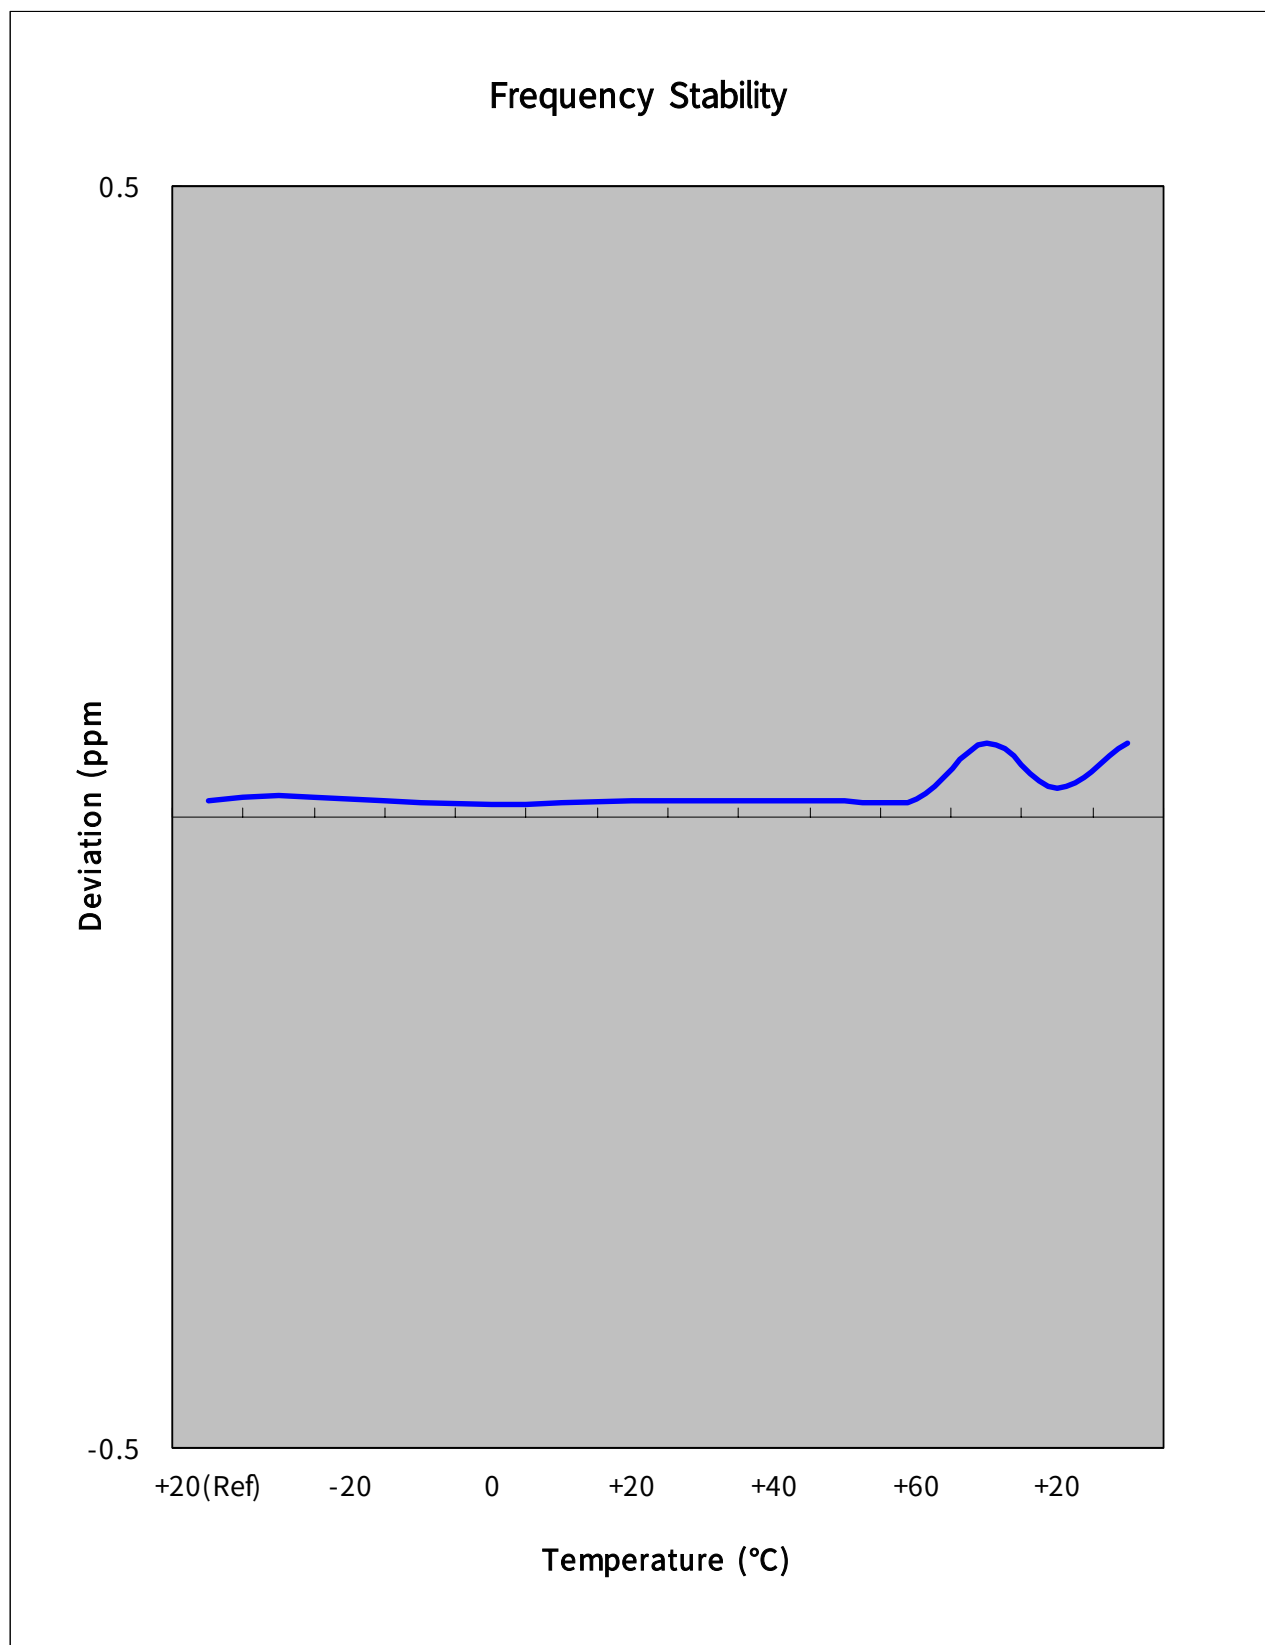

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	20.94	1,880,000,021	0.000001	0.011
100%		-30	66.67	1,880,000,067	0.000004	0.035
100%		-20	57.89	1,880,000,058	0.000003	0.031
100%		-10	46.16	1,880,000,046	0.000002	0.025
100%		0	46.20	1,880,000,046	0.000002	0.025
100%		+10	41.83	1,880,000,042	0.000002	0.022
100%		+20	20.94	1,880,000,021	0.000001	0.011
100%		+30	26.30	1,880,000,026	0.000001	0.014
100%		+40	19.12	1,880,000,019	0.000001	0.010
100%		+50	28.02	1,880,000,028	0.000001	0.015
100%		+60	28.53	1,880,000,029	0.000002	0.015
85%	3.3	+20	-39.90	1,879,999,960	-0.000002	-0.021
115%	4.26	+20	52.54	1,880,000,053	0.000003	0.028
Batt.Endpoint	3.3	+20	-39.90	1,879,999,960	-0.000002	-0.021


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

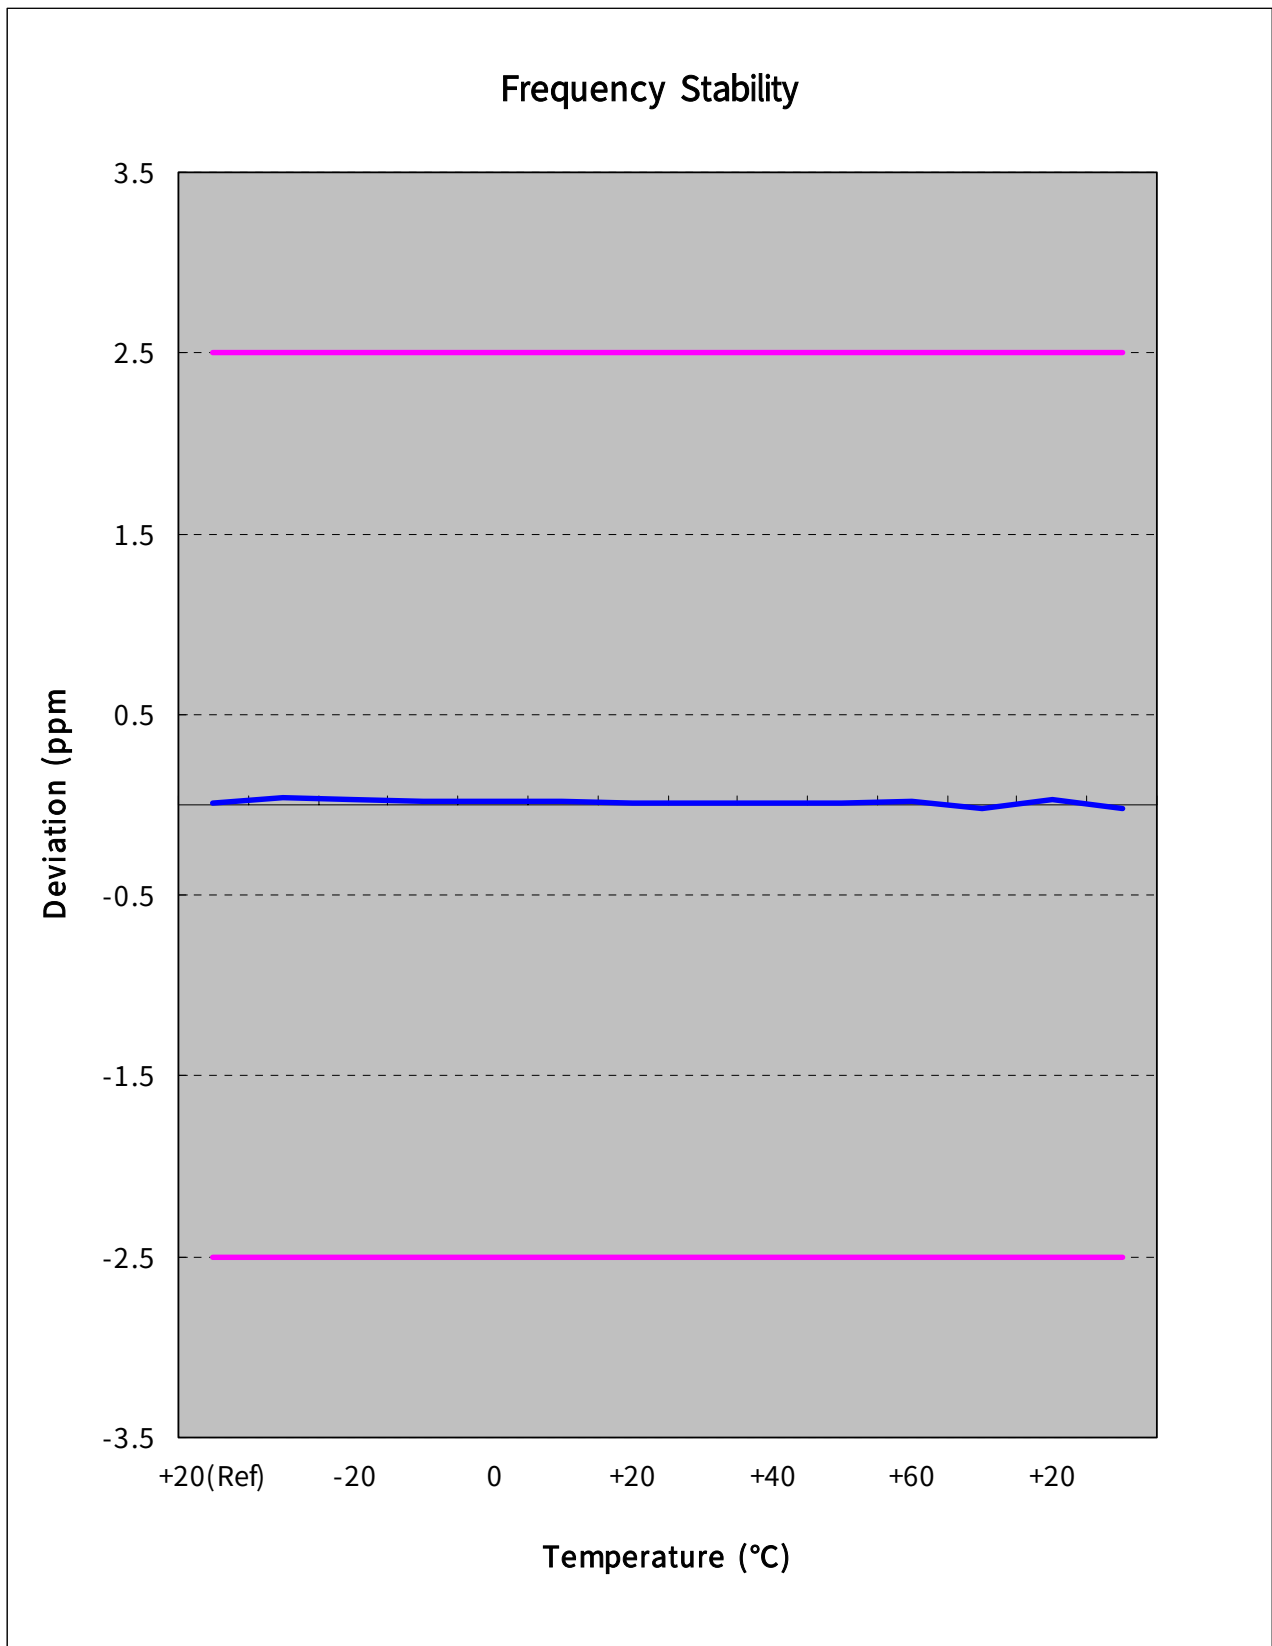

Zoom IN

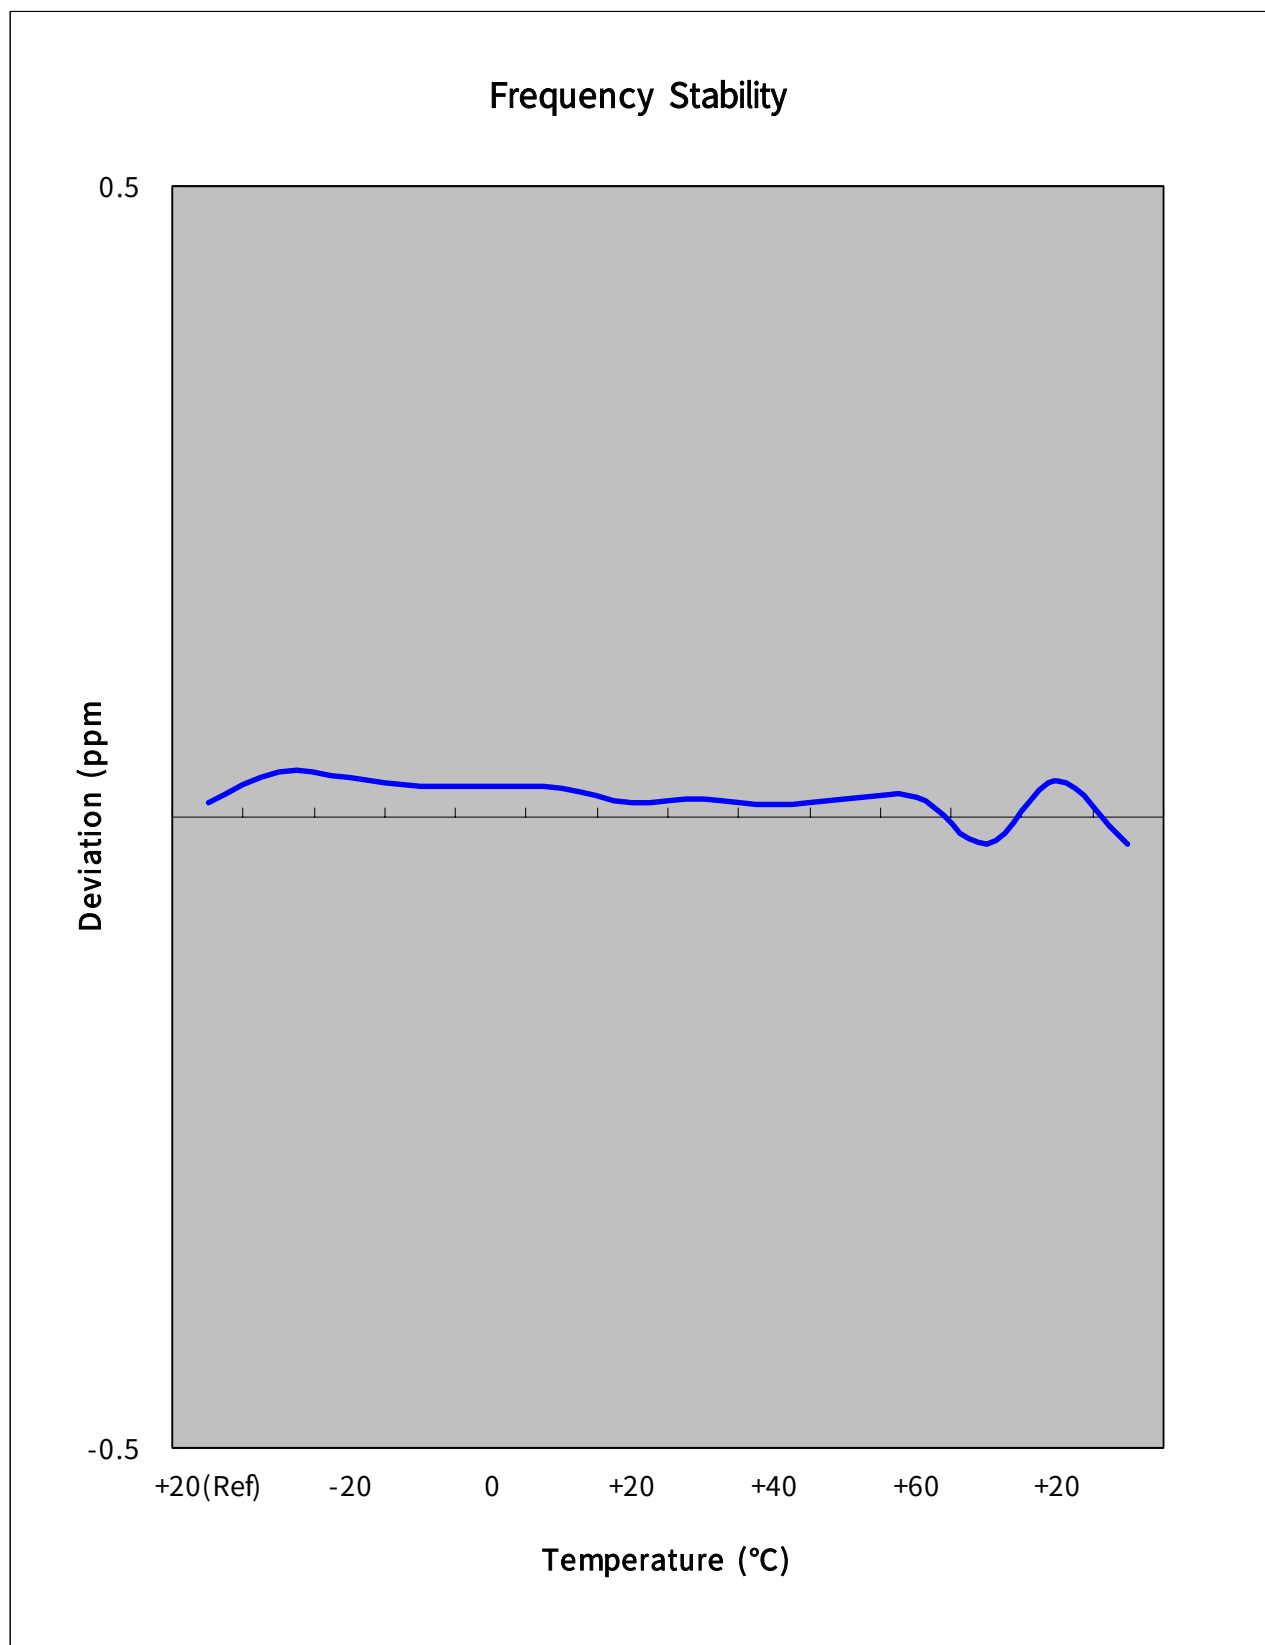



7. CONCLUSION

The data collected shows that the SAMSUNG Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth.


FCC ID : A3LSGHX686 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850

Agilent


R T

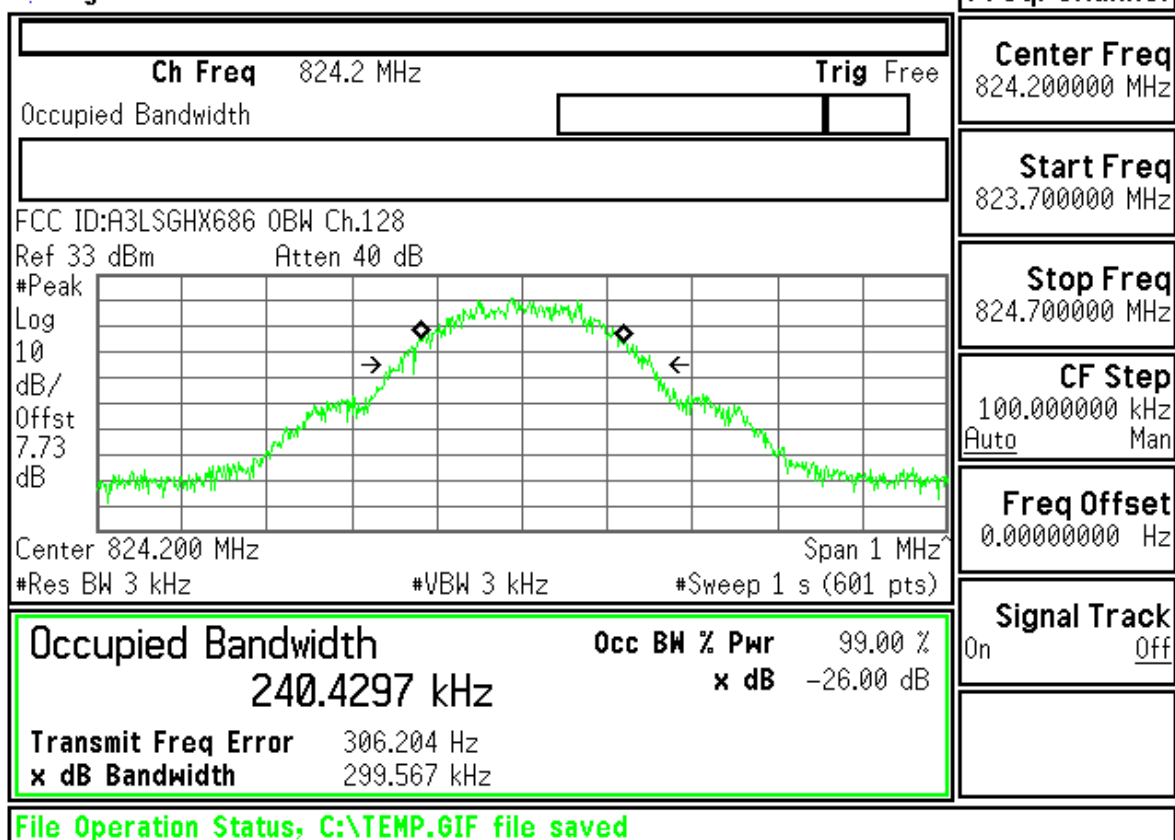


Freq/Channel
Center Freq 824.200000 MHz
Start Freq 823.700000 MHz
Stop Freq 824.700000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T


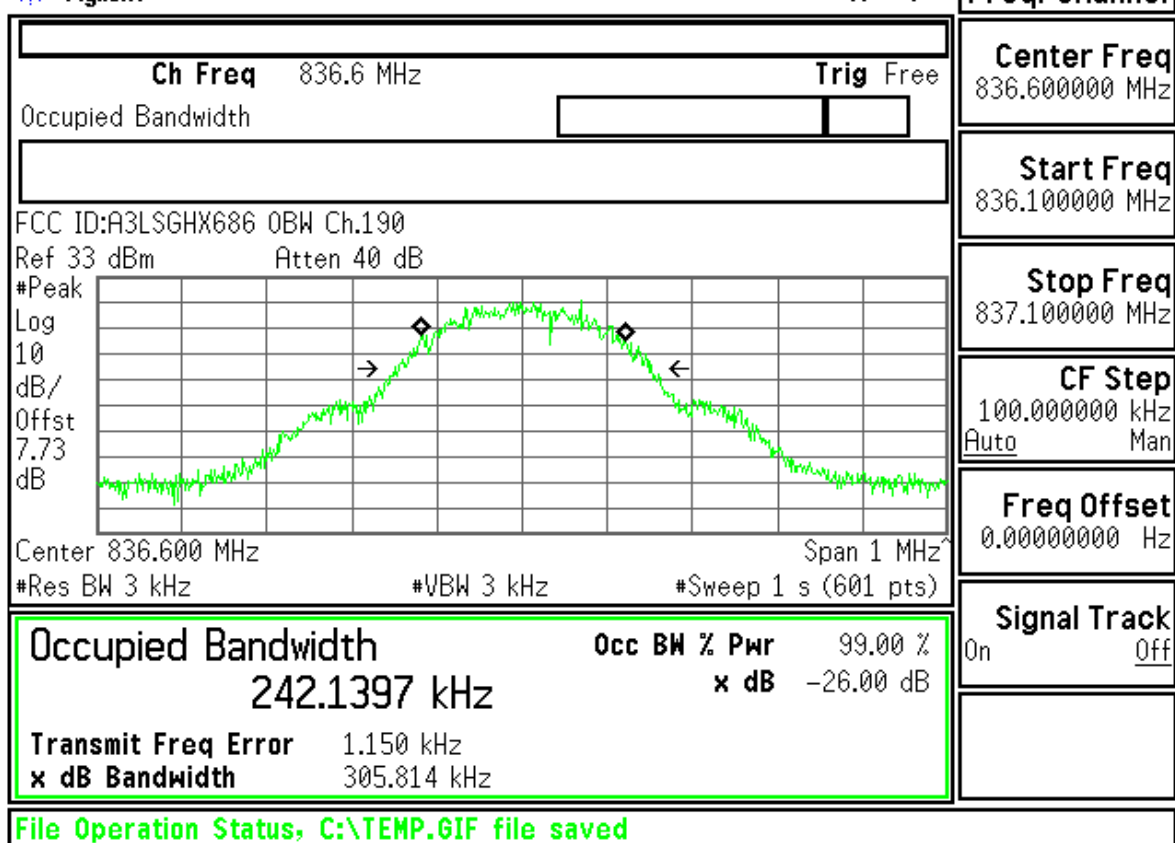


Freq/Channel
Center Freq 836.600000 MHz
Start Freq 836.100000 MHz
Stop Freq 837.100000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

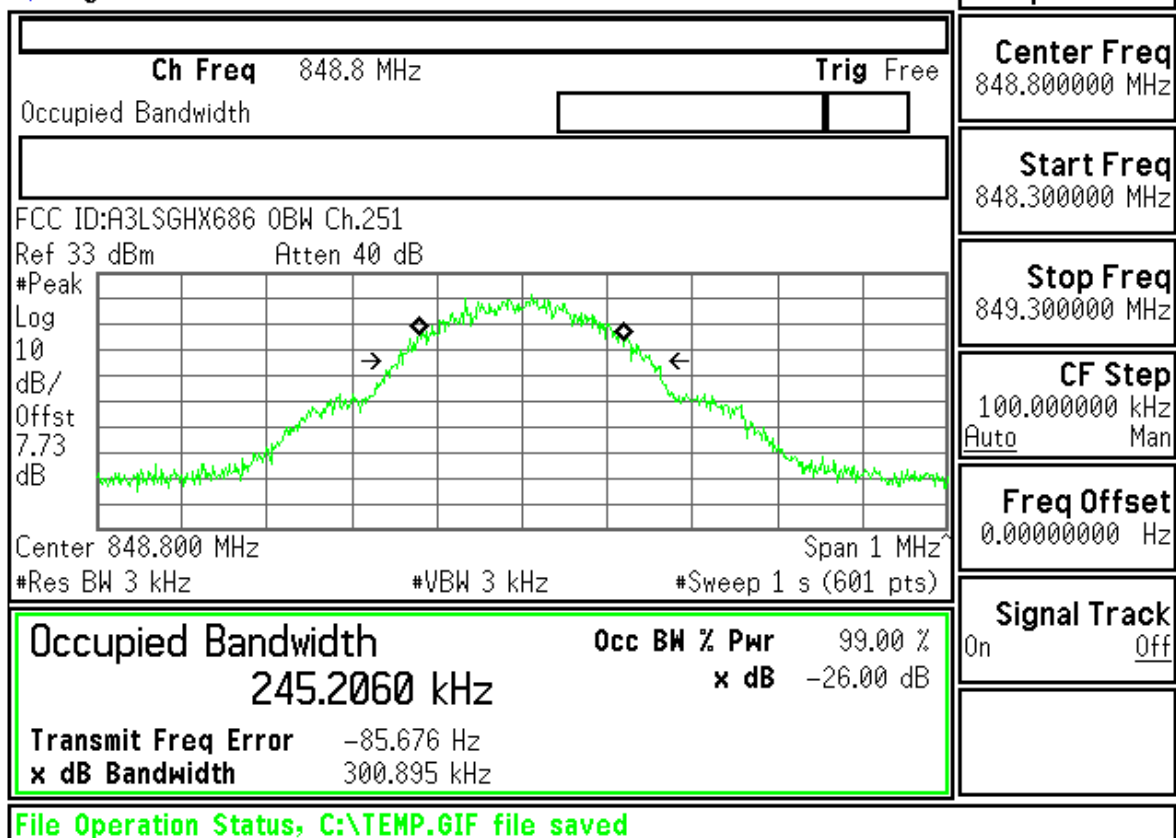


Measurement/Instrument Screen												
Control		GSM/GPRS Transmit Power								TCH Parms		
GSM/GPRS TX Power Setup		GMSK Transmit Power 32.07 dBm								Downlink Traffic Power		
										Traffic Band		
										GSM850		
										Traffic Channel		
										128		
										RIS TX Level		
										5		
Swap Window Positions										Channel Mode Setup		
										Return		
		Background		Active Cell Connected				Sys Type: GSM				
1 of 2				IntRef		Offset		R T				
										1 of 2		


Measurement/Instrument Screen																																			
Control		GSM/GPRS Transmit Power								TCH Parms																									
GSM/GPRS TX Power Setup ▾		GMSK Transmit Power 31.96 dBm								Downlink Traffic Power ▾																									
										Traffic Band																									
										GSM850																									
		Single								Traffic Channel																									
										190																									
		Phase & Frequency Error								MS TX Level																									
Swap Window Positions		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.34</td><td>1.27</td><td>-0.83</td></tr><tr><td>Maximum</td><td>5.78</td><td>1.64</td><td>7.95</td></tr><tr><td>Average</td><td>4.24</td><td>1.47</td><td>3.24</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>												Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.34	1.27	-0.83	Maximum	5.78	1.64	7.95	Average	4.24	1.47	3.24	Pass/Fail	Pass	Pass	Pass	5		
			Peak Phase °	RMS Phase °	Frequency Hz																														
		Minimum	3.34	1.27	-0.83																														
		Maximum	5.78	1.64	7.95																														
		Average	4.24	1.47	3.24																														
Pass/Fail	Pass	Pass	Pass																																
		10 / 50								Continuous																									
		Background		Active Cell Connected				Sys Type: GSM			Channel Mode Setup ▾																								
1 of 2					IntRef	Offset	R	T				Return																							
												1 of 2																							

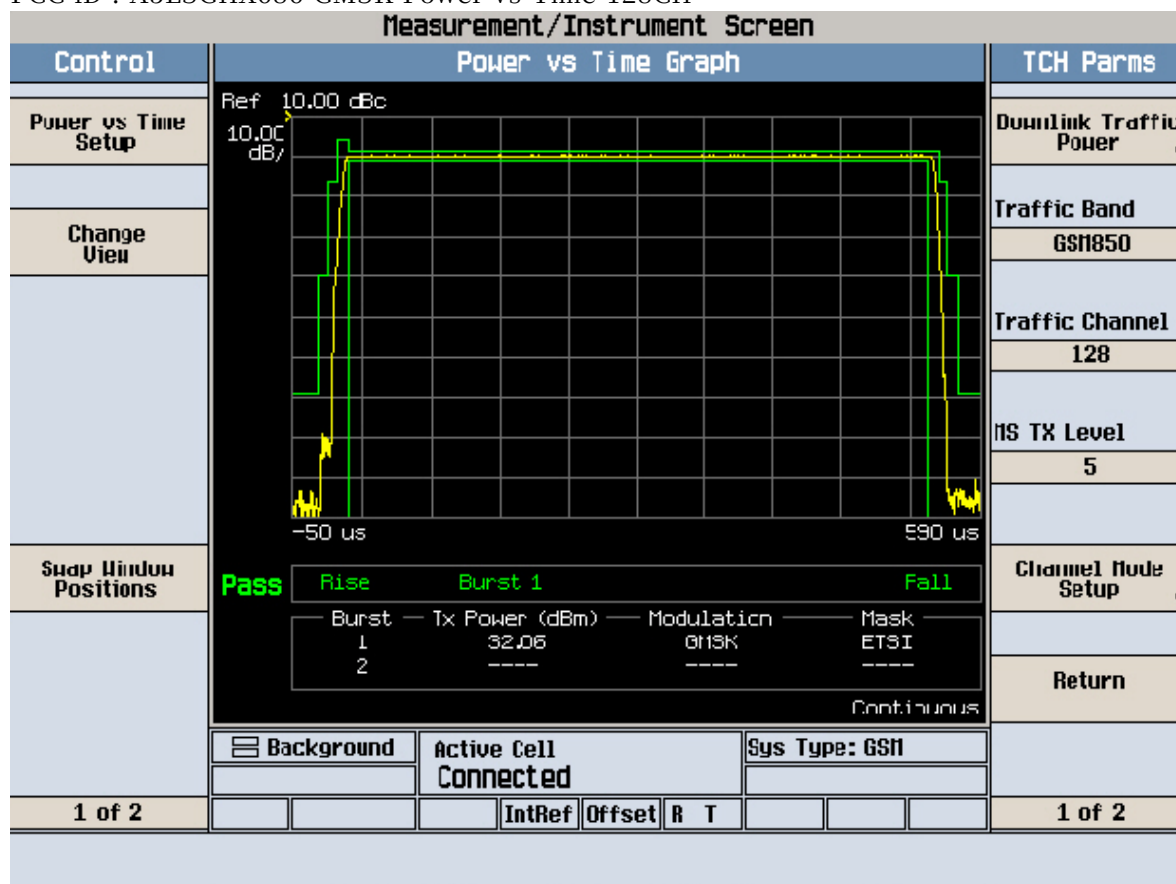
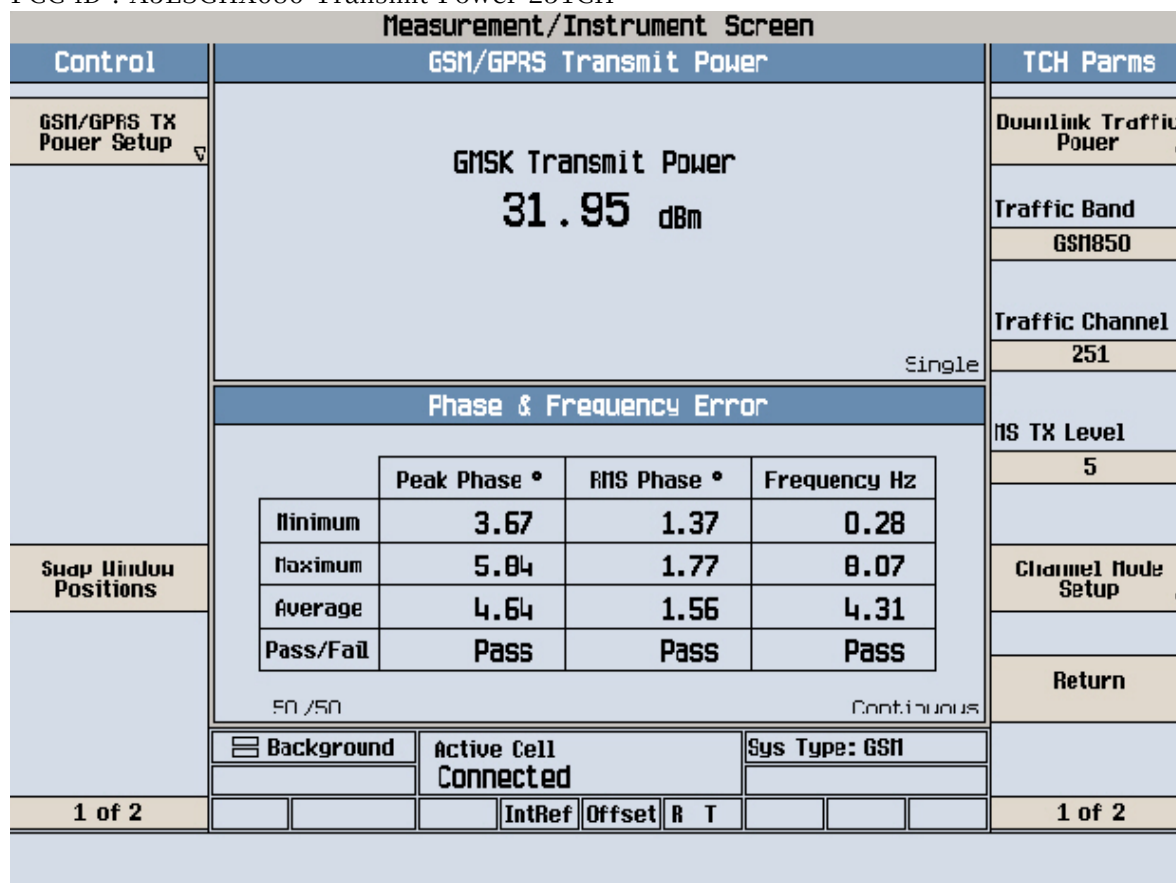



FCC ID : A3LSGHX686 GMSK Power vs Time 190CH


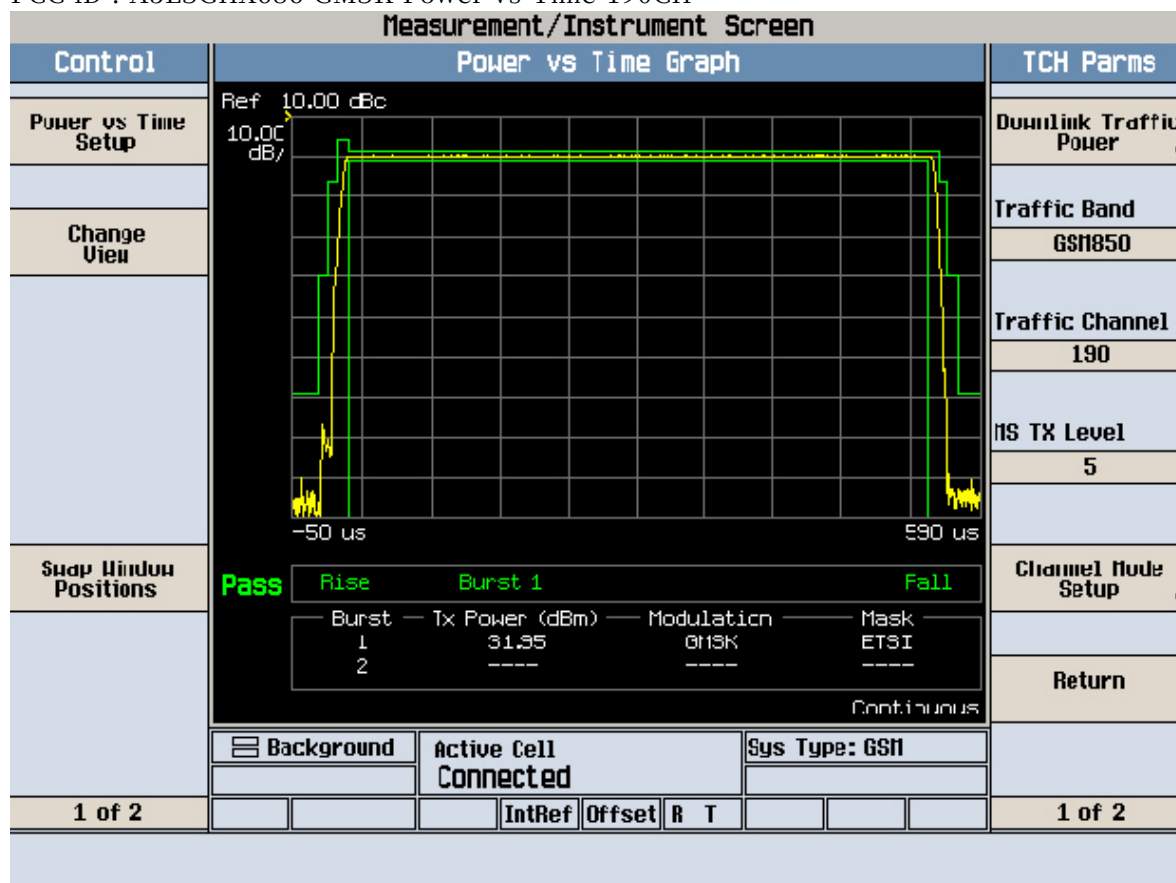




FCC ID : A3LSGHX686 GMSK Power vs Time 251CH

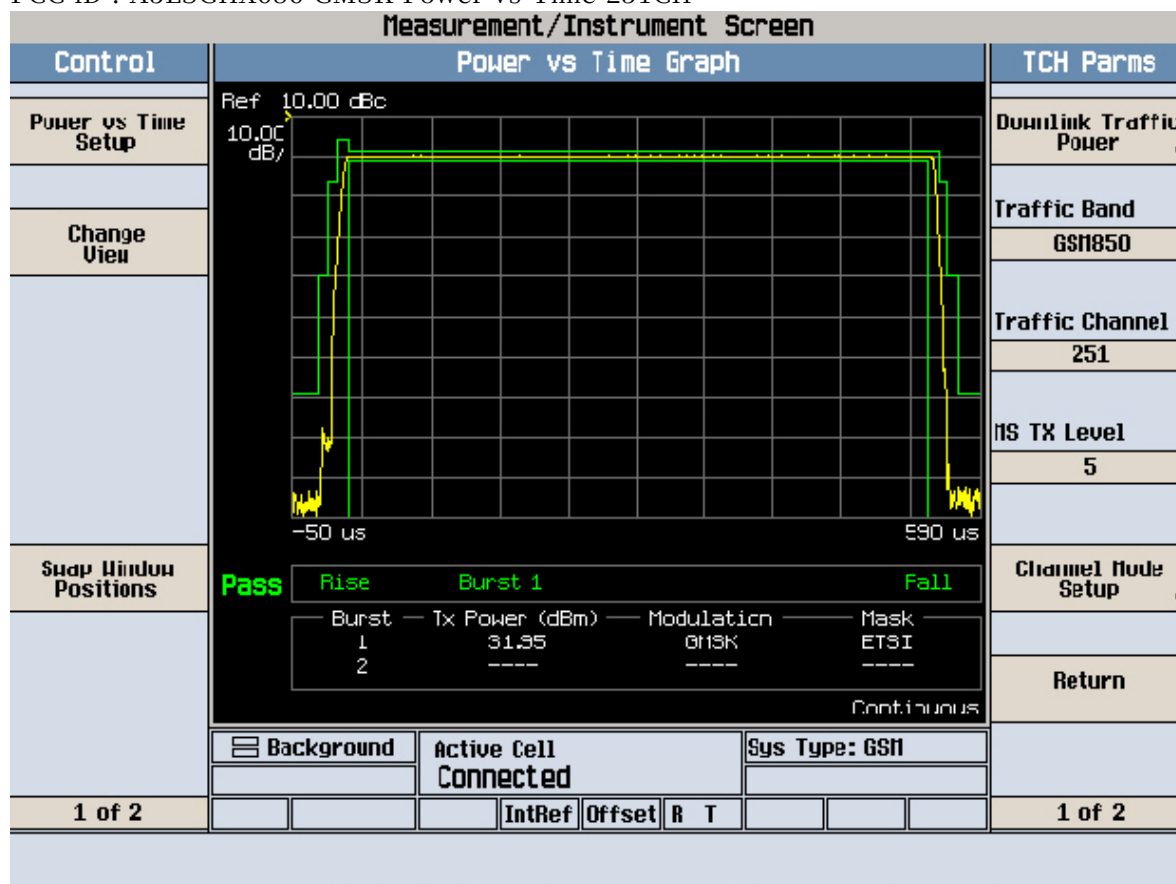

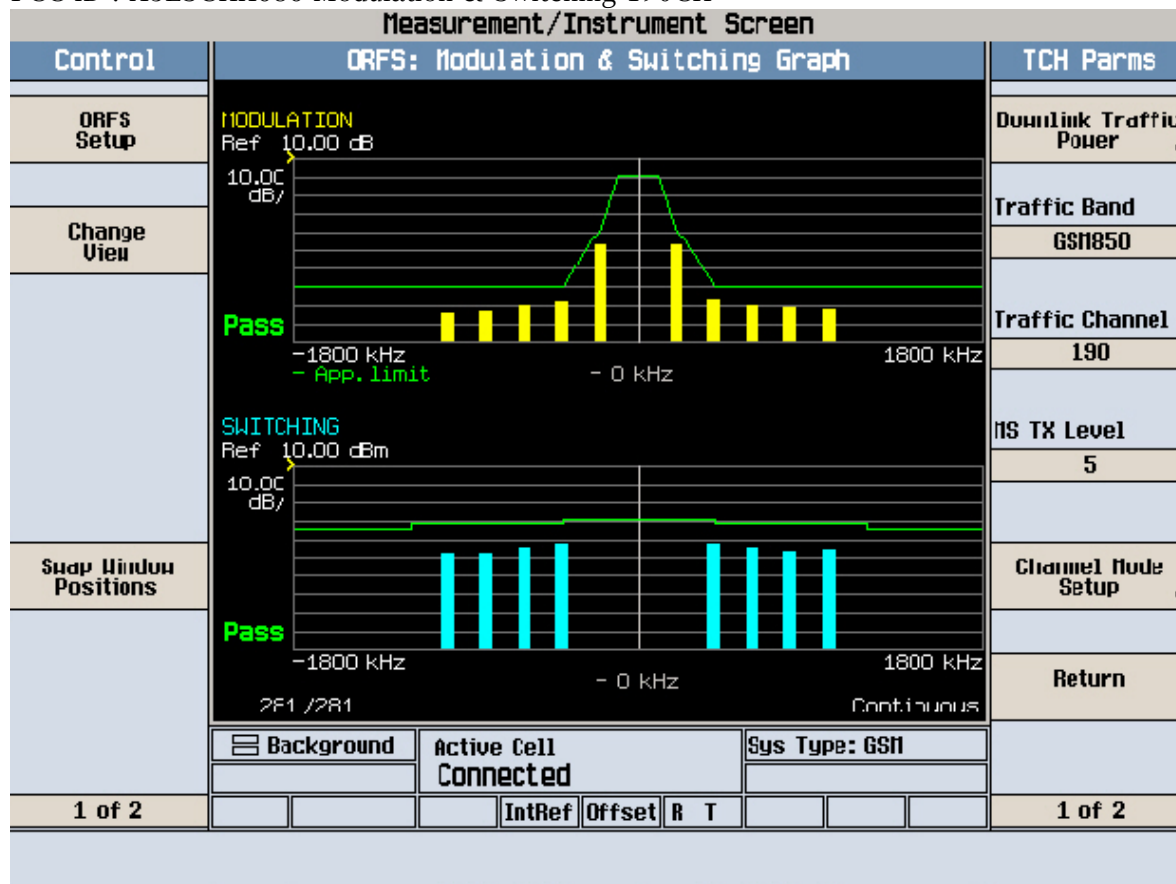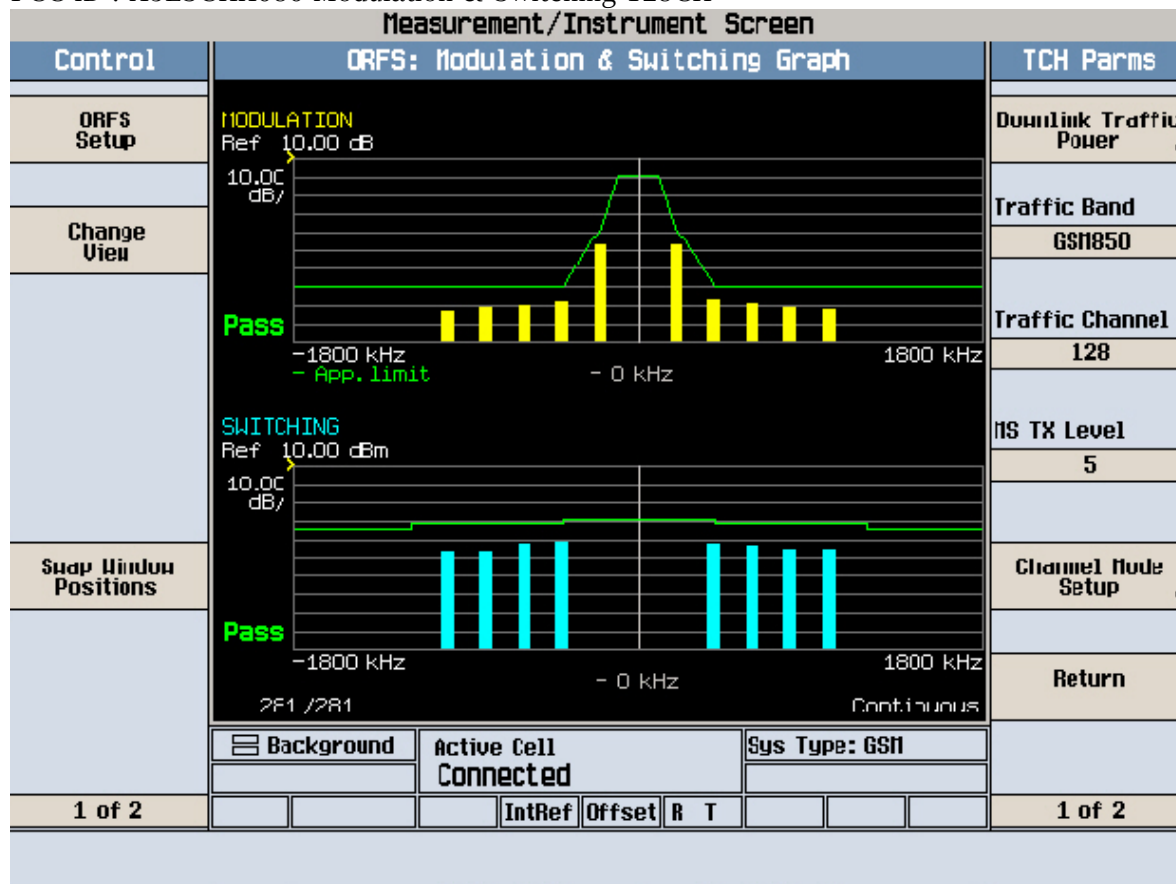

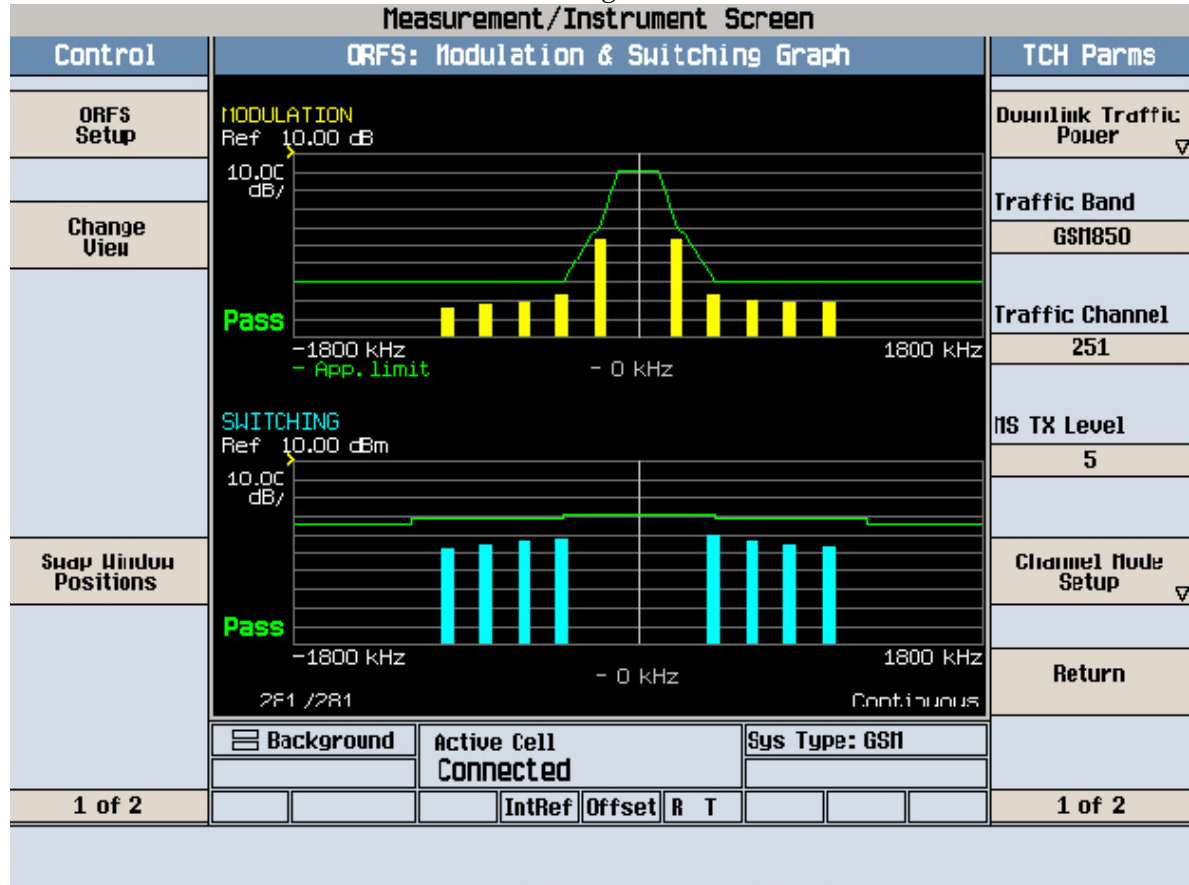

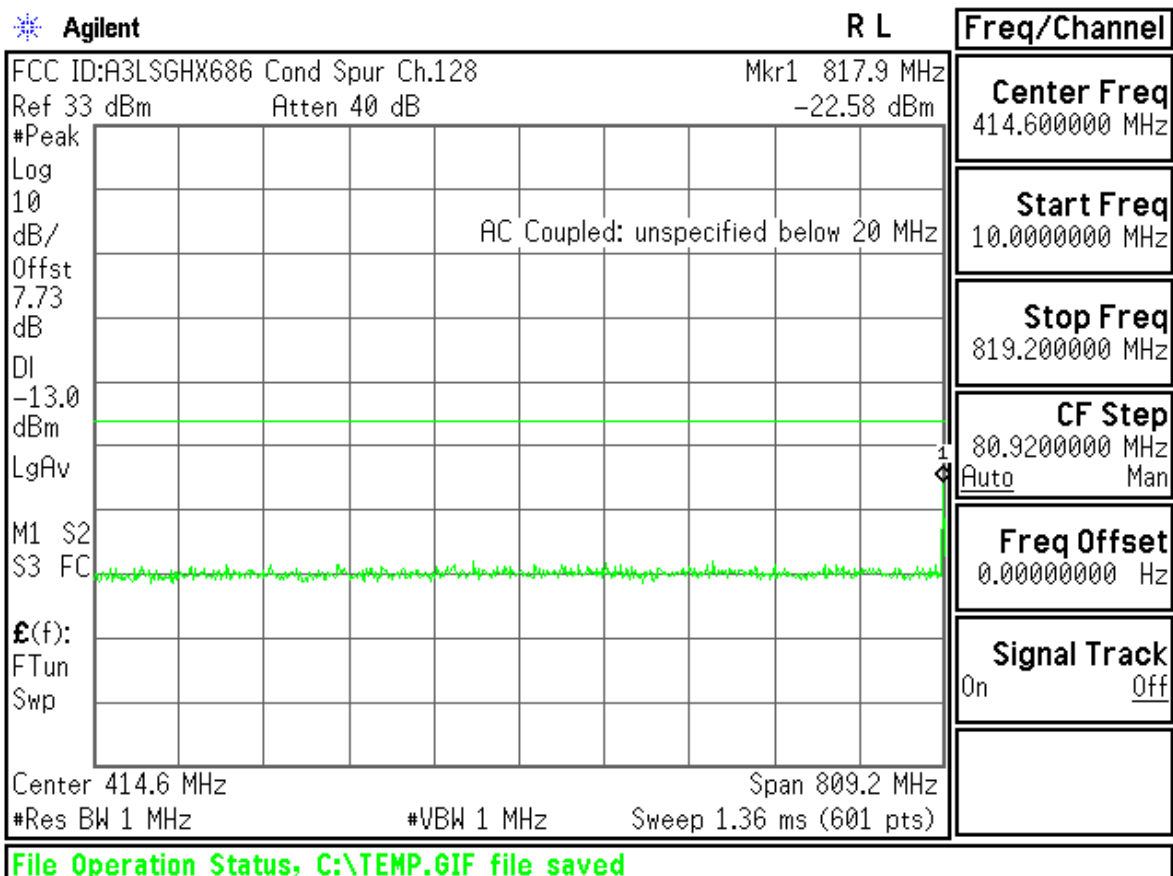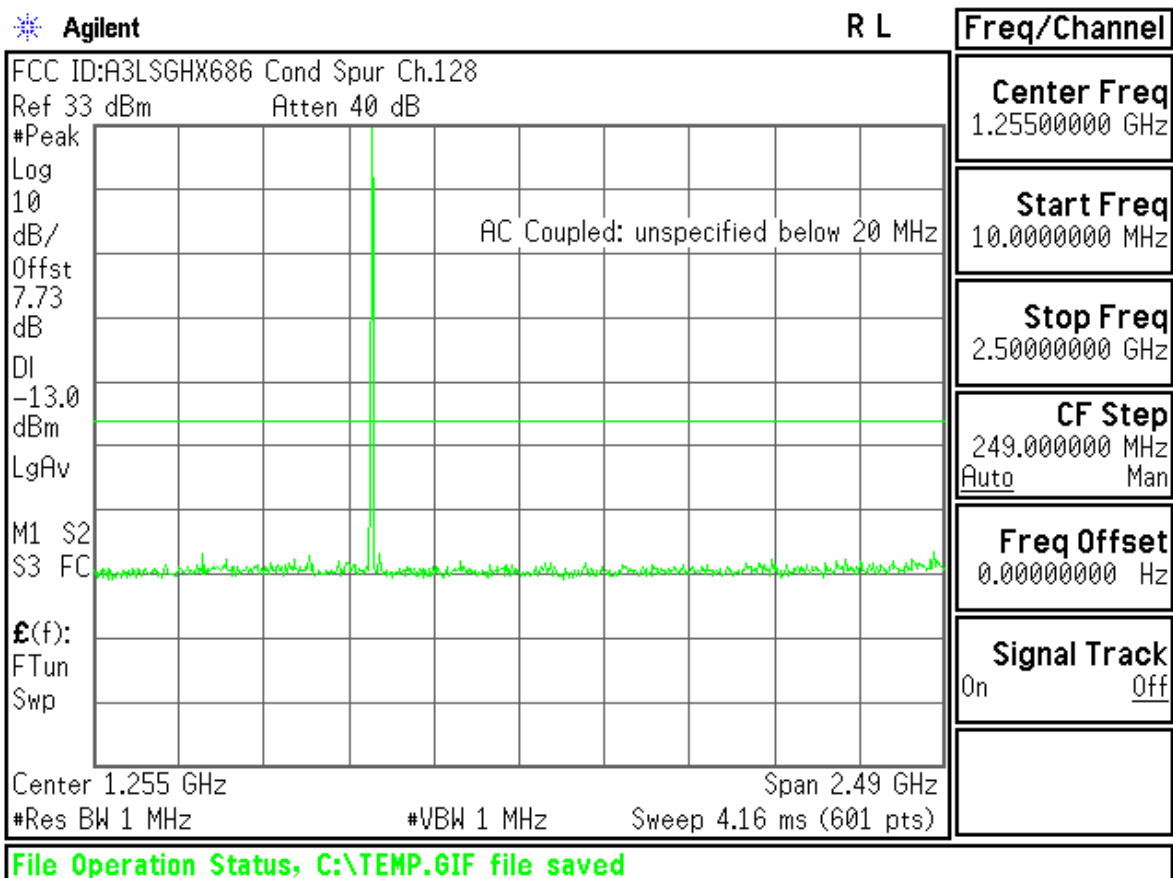

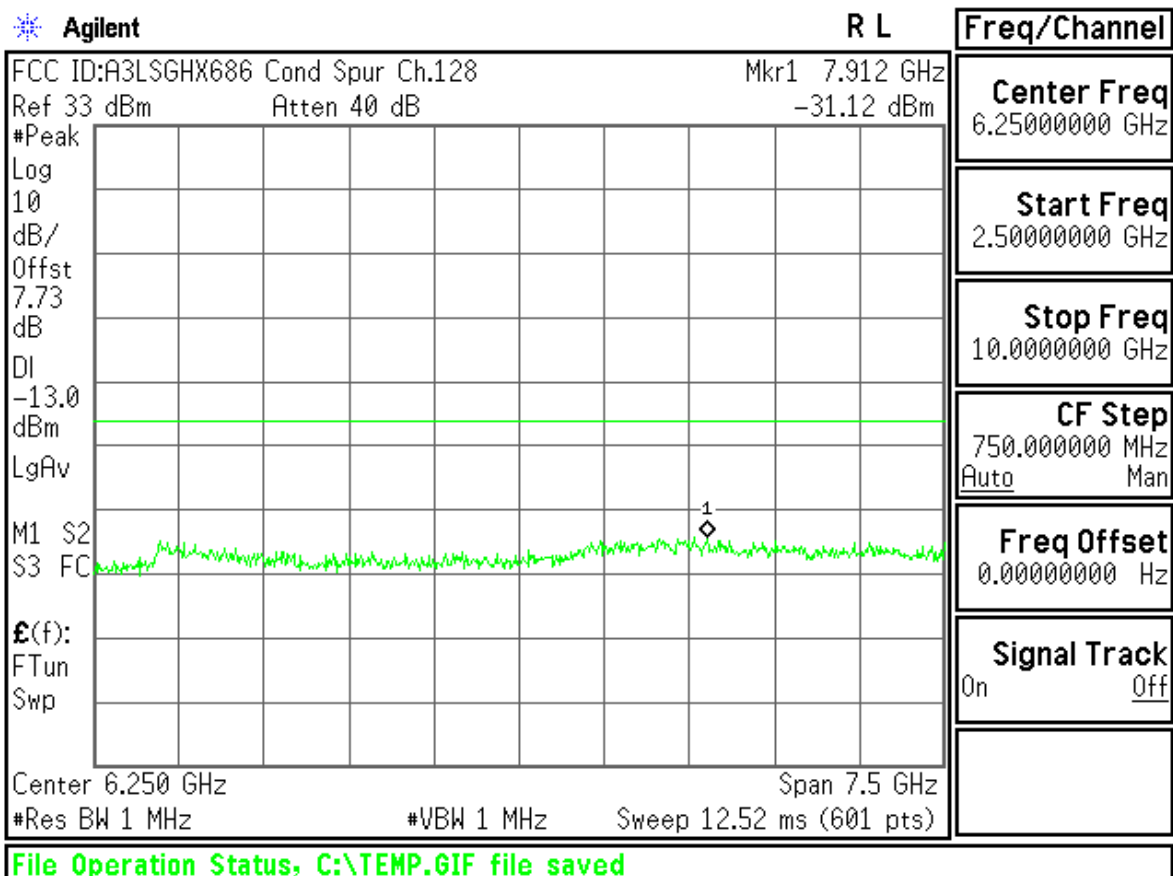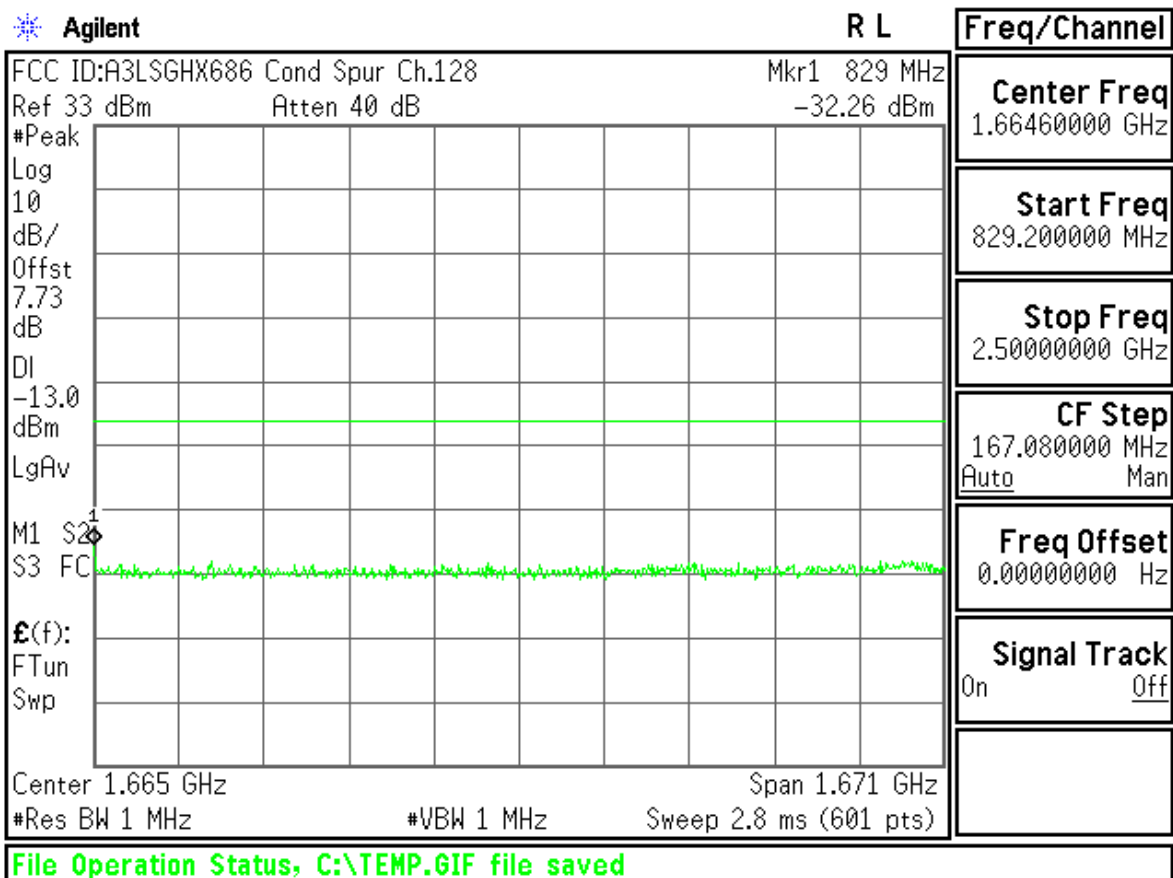

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Cond Spur Ch.190

Mkr1 441.3 MHz

Ref 33 dBm

Atten 40 dB

-34.57 dBm

#Peak

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz



Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

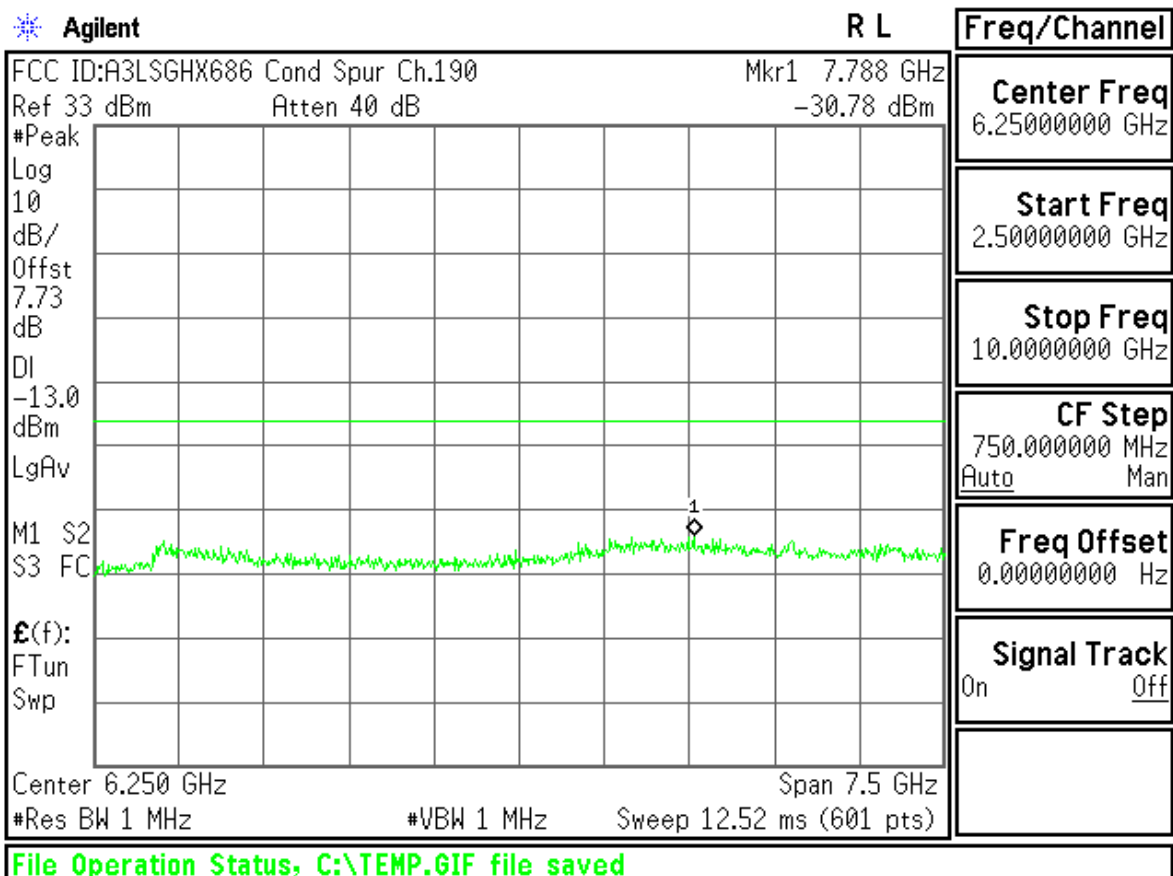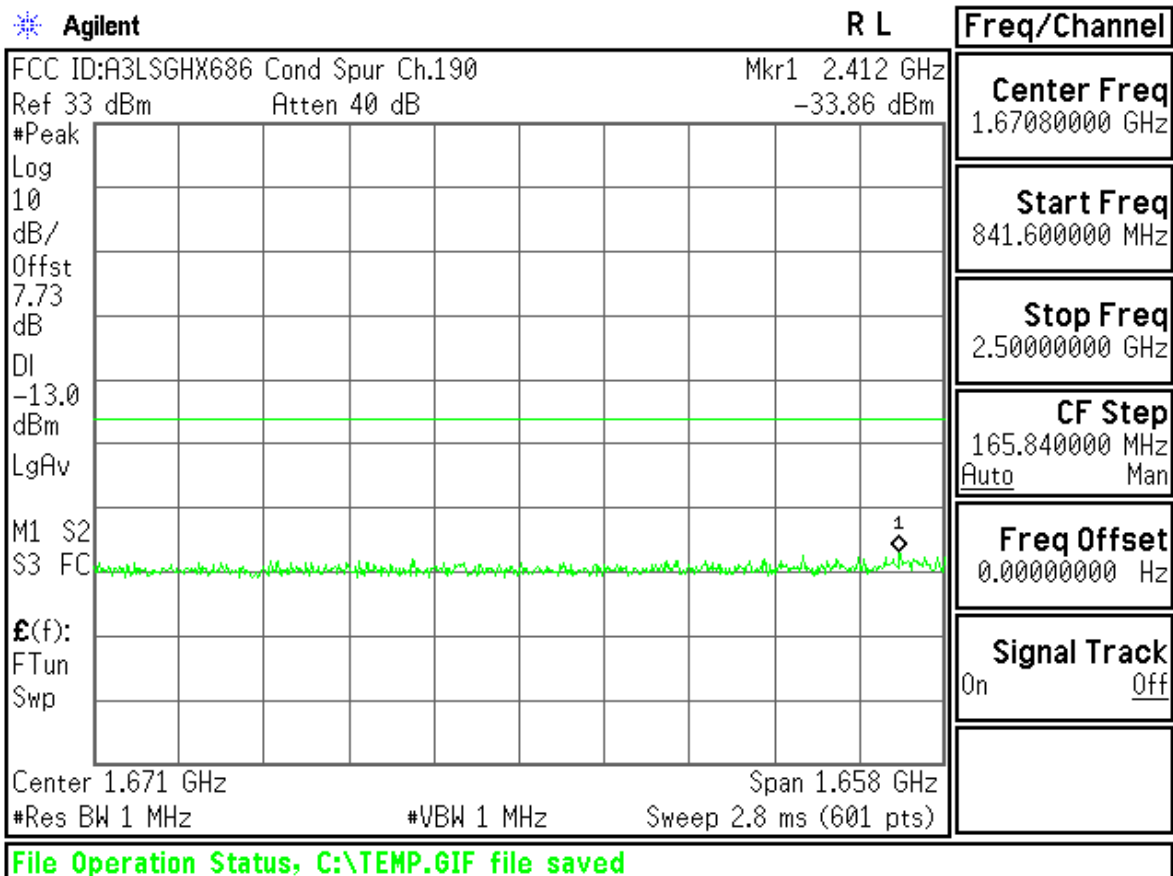

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Cond Spur Ch.251

Mkr1 843.8 MHz

Ref 33 dBm

Atten 40 dB

-19.05 dBm

#Peak

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
426.900000 MHz

Start Freq
10.0000000 MHz



Stop Freq
843.800000 MHz

CF Step
83.3800000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

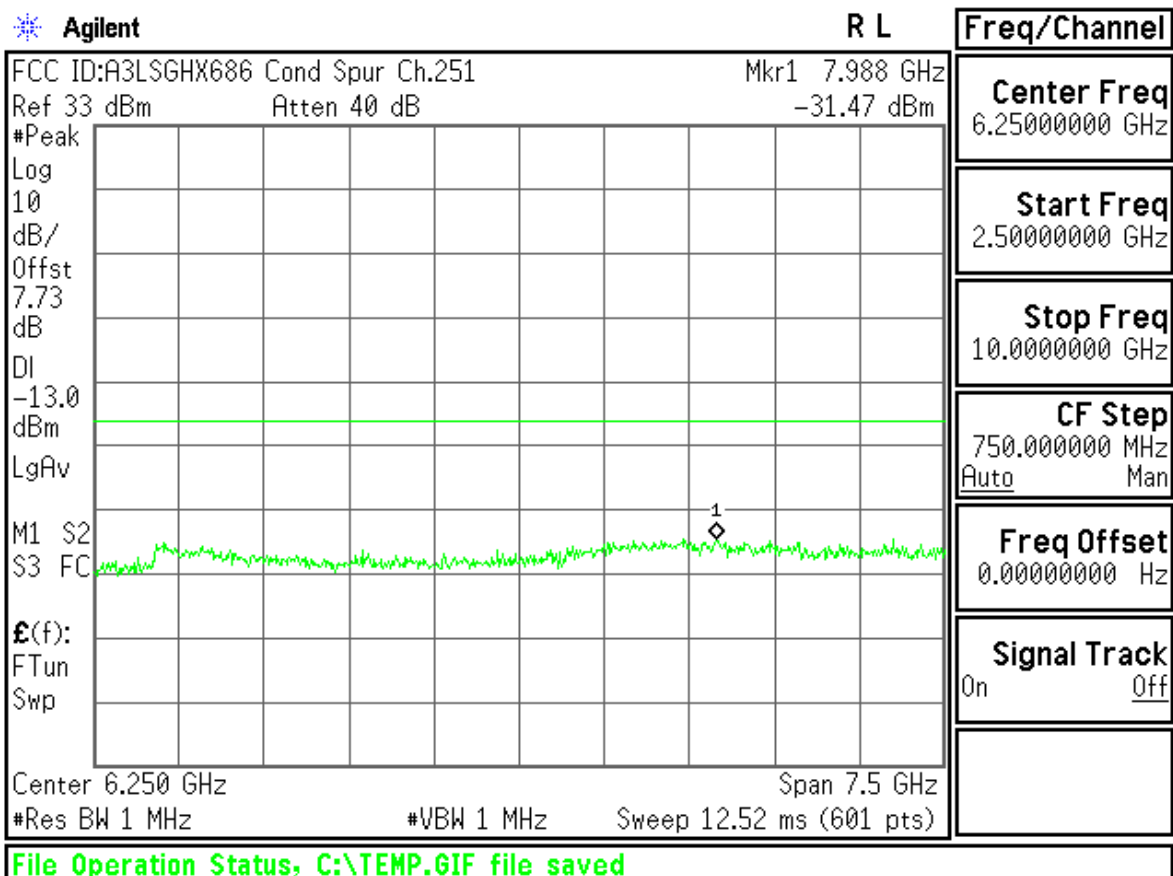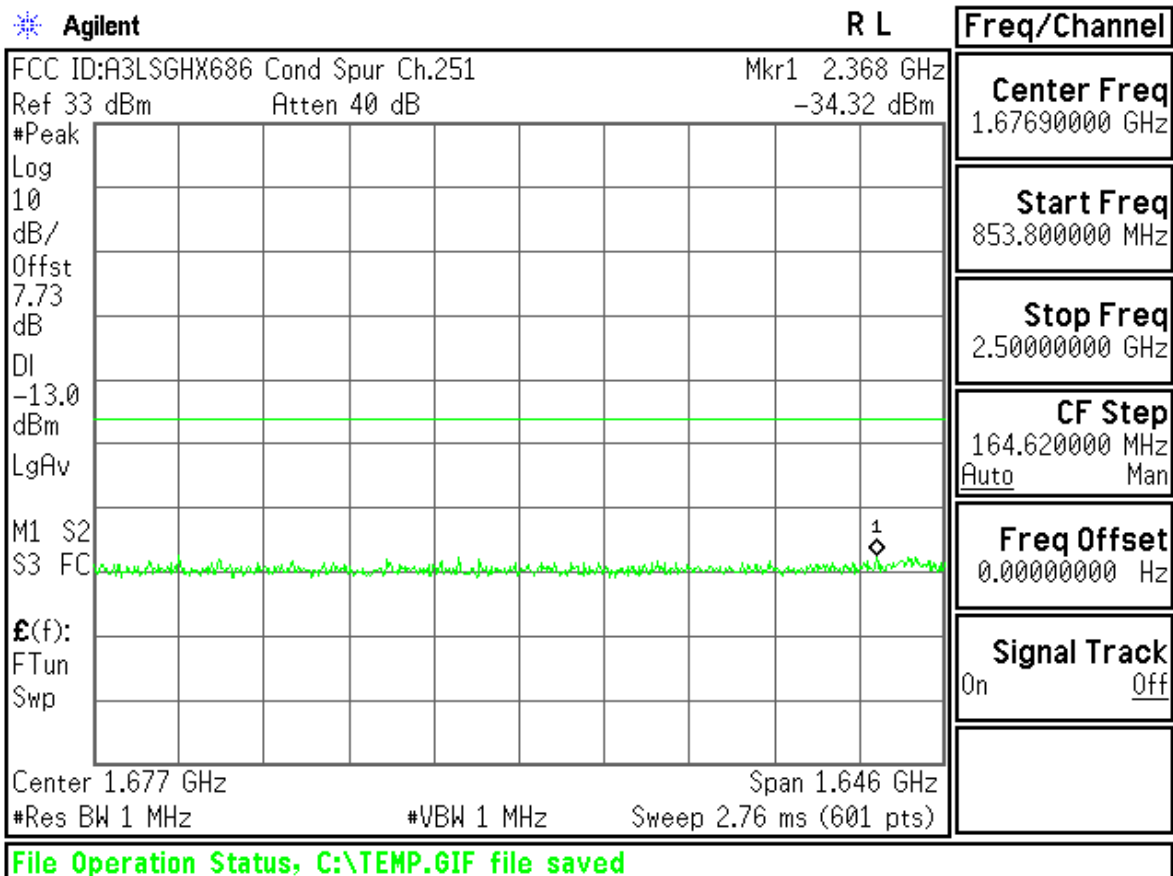

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

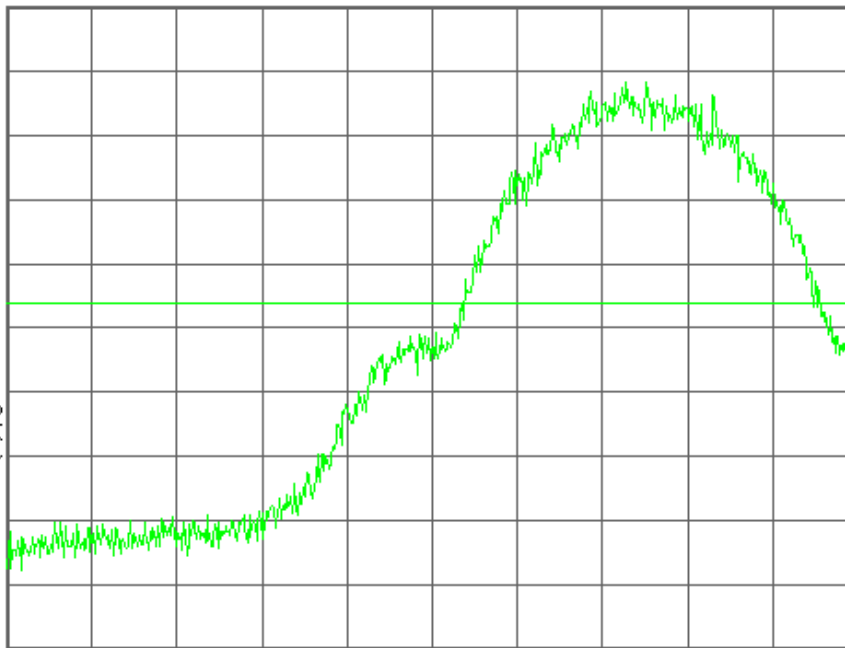

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

824.000000 MHz

Start Freq

823.595000 MHz

Stop Freq

824.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.128

Mkr1 823.996 0 MHz

Ref 33 dBm

Atten 40 dB

-15.03 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

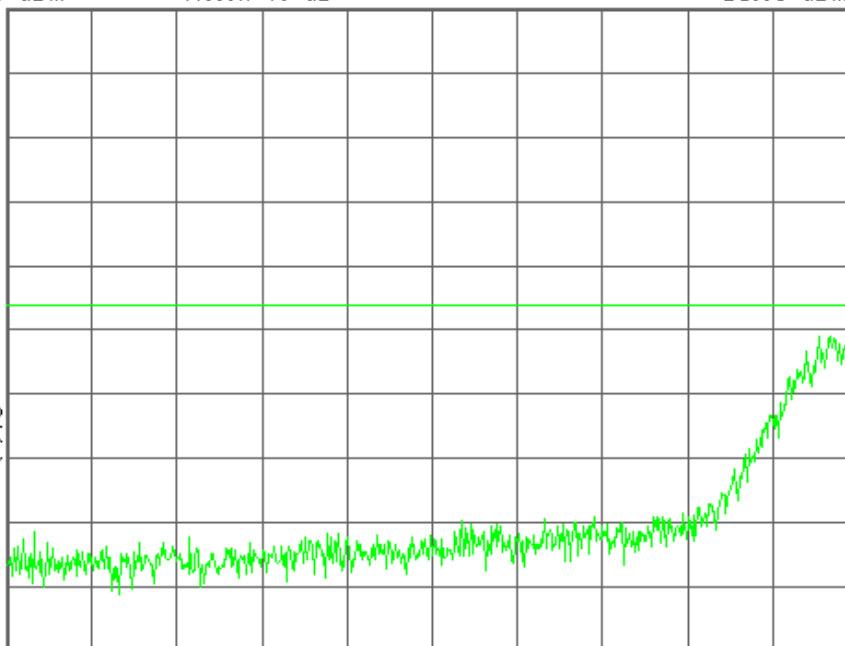

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

823.595000 MHz

Start Freq

823.190000 MHz

Stop Freq

824.000000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

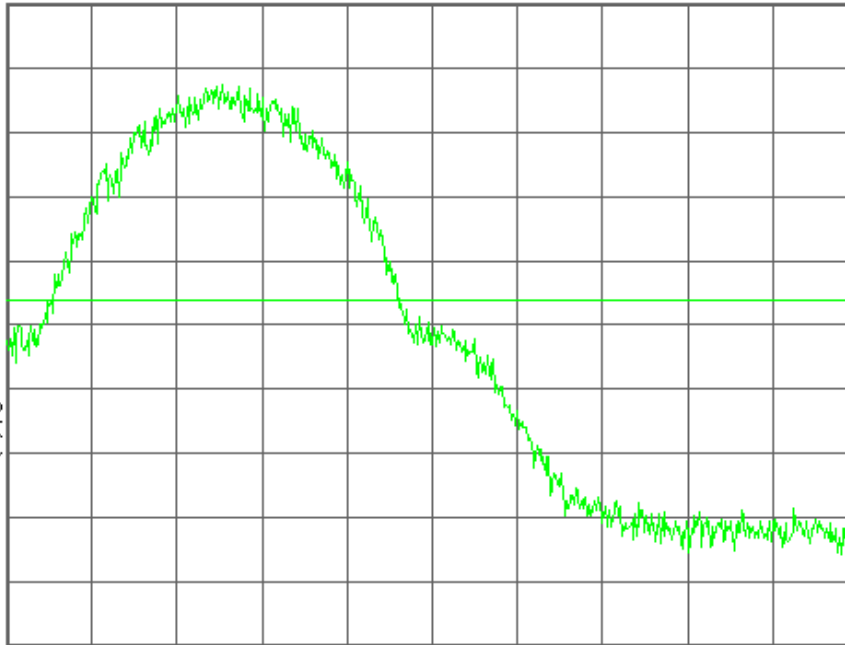

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.251

Mkr1 849.017 4 MHz

Ref 33 dBm

Atten 40 dB

-15.70 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

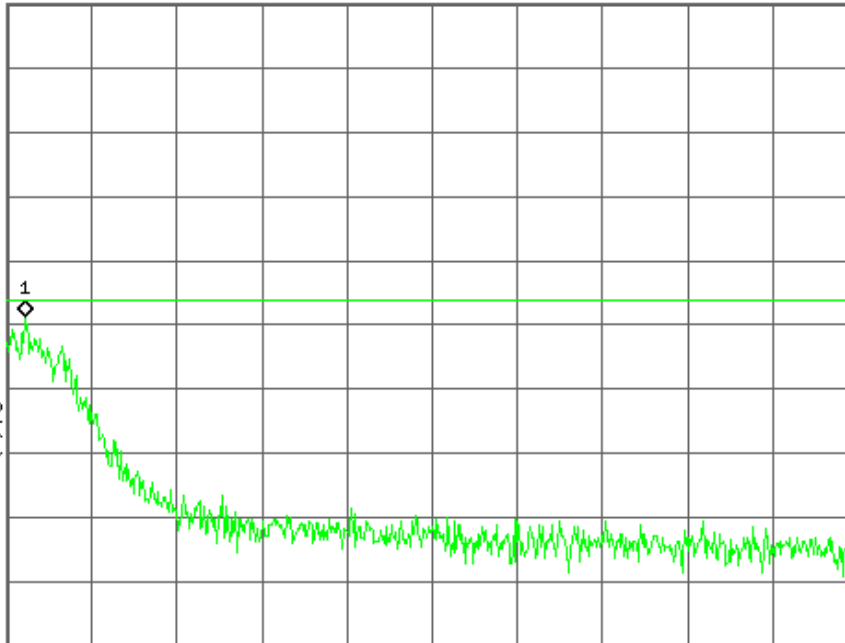

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

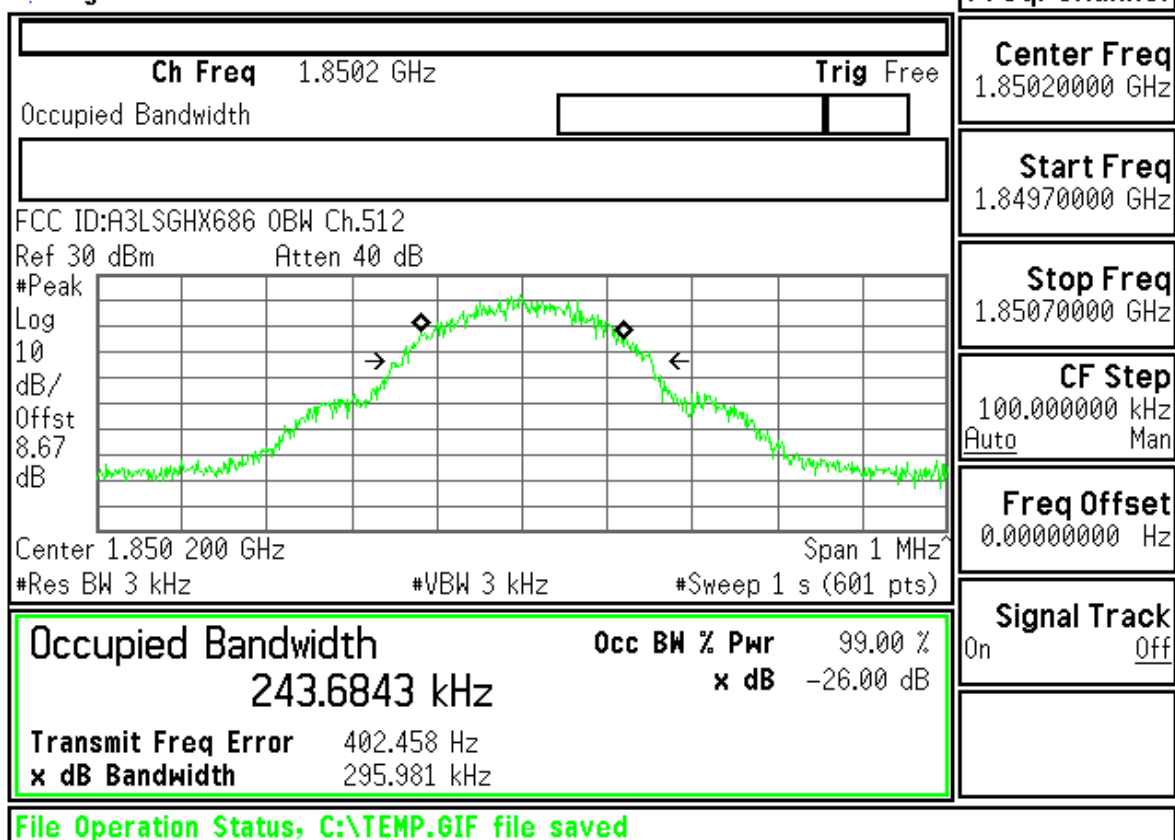

Freq/Channel

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Agilent

R T

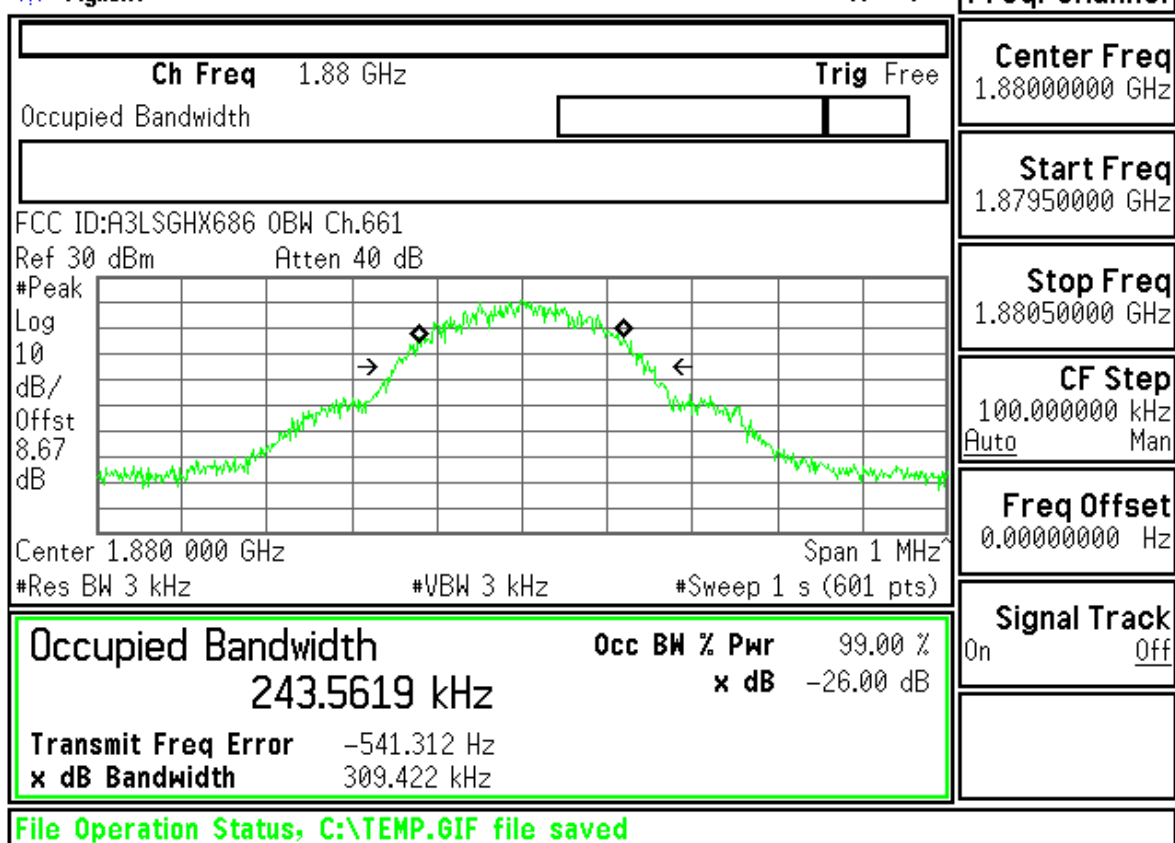

Freq/Channel

Center Freq
1.88000000 GHz


Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

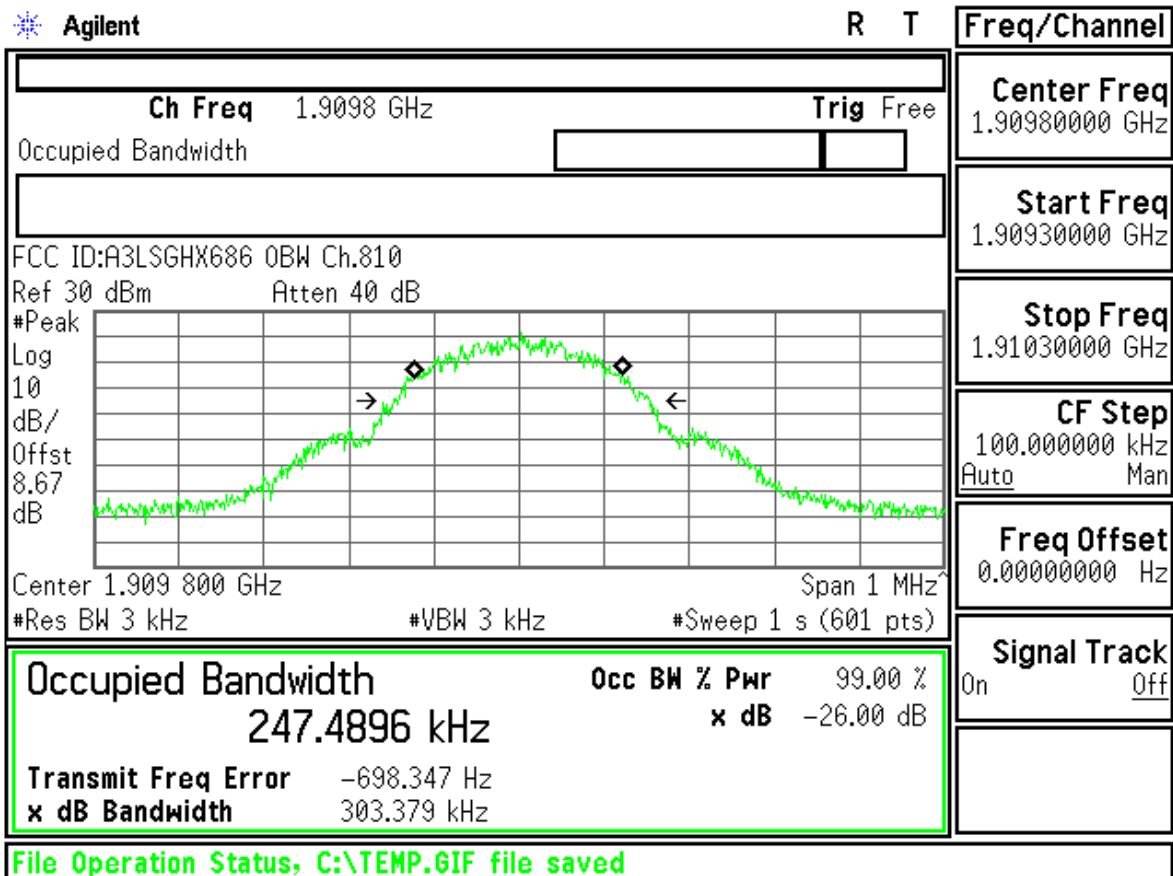


FCC ID : A3LSGHX686 Transmit Power 512CH

Measurement/Instrument Screen																																
Control		GSM/GPRS Transmit Power								TCH Parms																						
GSM/GPRS TX Power Setup		GMSK Transmit Power 29.75 dBm								Downlink Traffic Power																						
										Traffic Band																						
										PCS																						
										Traffic Channel																						
										512																						
										RIS TX Level																						
										0																						
Swap Window Positions		<table><tr><th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr><tr><td>Minimum</td><td>5.37</td><td>2.02</td><td>2.09</td></tr><tr><td>Maximum</td><td>8.37</td><td>2.55</td><td>23.06</td></tr><tr><td>Average</td><td>6.61</td><td>2.31</td><td>11.51</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.37	2.02	2.09	Maximum	8.37	2.55	23.06	Average	6.61	2.31	11.51	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup		
	Peak Phase °									RMS Phase °	Frequency Hz																					
Minimum	5.37									2.02	2.09																					
Maximum	8.37									2.55	23.06																					
Average	6.61	2.31	11.51																													
Pass/Fail	Pass	Pass	Pass																													
										Return																						
1 of 2		Background		Active Cell Connected				Sys Type: GSM			1 of 2																					
				IntRef Offset R T																												


Measurement/Instrument Screen																																
Control		GSM/GPRS Transmit Power								TCH Params																						
GSM/GPRS TX Power Setup ▾		GMSK Transmit Power 29.53 dBm Single								Downlink Traffic Power ▾																						
										Traffic Band																						
										PCS																						
										Traffic Channel																						
										661																						
		Phase & Frequency Error								MS TX Level																						
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>5.24</td><td>1.96</td><td>-14.84</td></tr><tr><td>Maximum</td><td>8.47</td><td>2.59</td><td>8.41</td></tr><tr><td>Average</td><td>6.81</td><td>2.31</td><td>-4.00</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table> SN / SNContinuous									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.24	1.96	-14.84	Maximum	8.47	2.59	8.41	Average	6.81	2.31	-4.00	Pass/Fail	Pass	Pass	Pass	0		
	Peak Phase °									RMS Phase °	Frequency Hz																					
Minimum	5.24									1.96	-14.84																					
Maximum	8.47									2.59	8.41																					
Average	6.81									2.31	-4.00																					
Pass/Fail	Pass	Pass	Pass																													
Swap Window Positions										Channel Mode Setup ▾																						
										Return																						
		Background		Active Cell Connected				Sys Type: GSM																								
1 of 2					IntRef	Offset	R	T				1 of 2																				



Measurement/Instrument Screen																																
Control		GSM/GPRS Transmit Power								TCH Params																						
GSM/GPRS TX Power Setup ▾		GMSK Transmit Power 29.38 dBm								Downlink Traffic Power ▾																						
										Traffic Band																						
										PCS																						
										Traffic Channel																						
		Single								810																						
		Phase & Frequency Error																														
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>5.15</td><td>1.96</td><td>-26.64</td></tr><tr><td>Maximum</td><td>8.31</td><td>2.63</td><td>-12.93</td></tr><tr><td>Average</td><td>6.74</td><td>2.24</td><td>-19.52</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>												Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.15	1.96	-26.64	Maximum	8.31	2.63	-12.93	Average	6.74	2.24	-19.52	Pass/Fail	Pass	Pass	Pass
	Peak Phase °	RMS Phase °	Frequency Hz																													
Minimum	5.15	1.96	-26.64																													
Maximum	8.31	2.63	-12.93																													
Average	6.74	2.24	-19.52																													
Pass/Fail	Pass	Pass	Pass																													
Swap Window Positions		10 / 50																														
		Continuous																														
		Background		Active Cell Connected				Sys Type: GSM																								
1 of 2					IntRef	Offset	R	T																								
		1 of 2																														



FCC ID : A3LSGHX686 GMSK Power vs Time 512CH


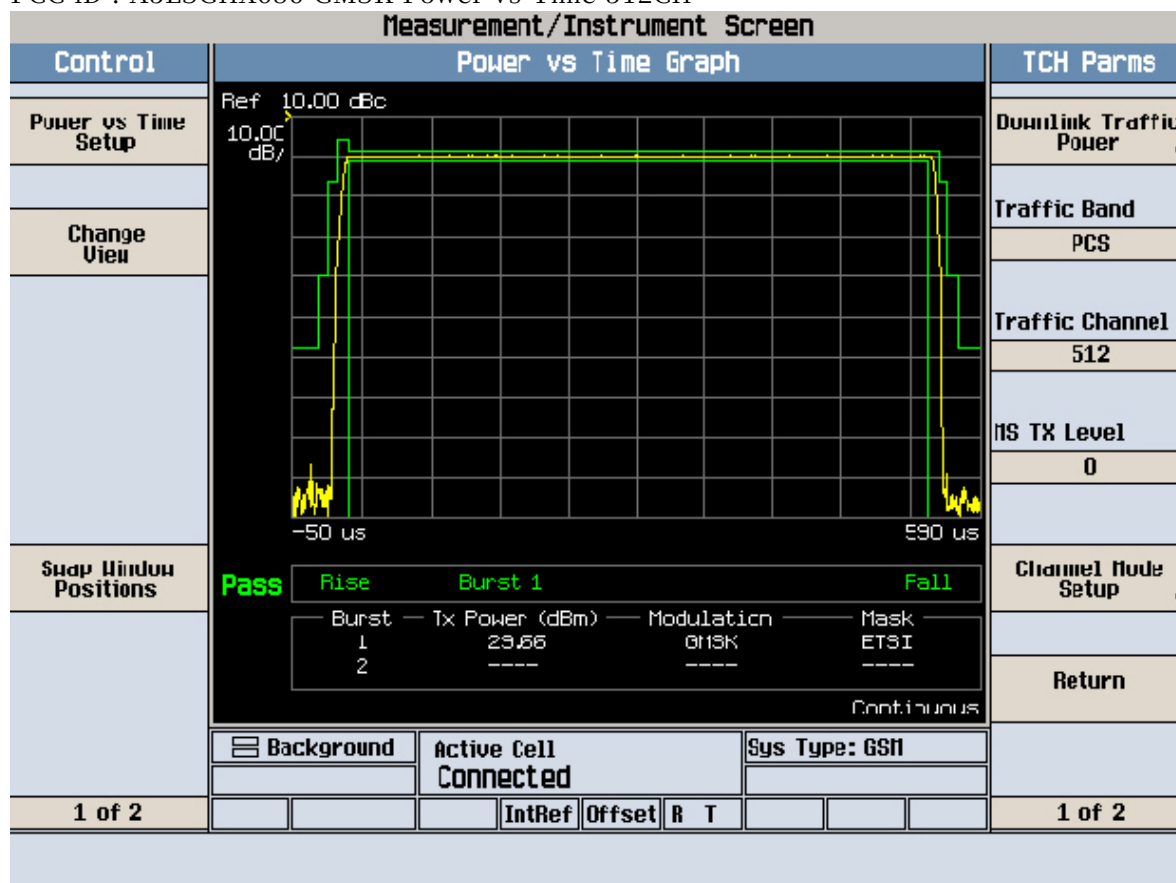


FCC ID : A3LSGHX686 GMSK Power vs Time 661CH

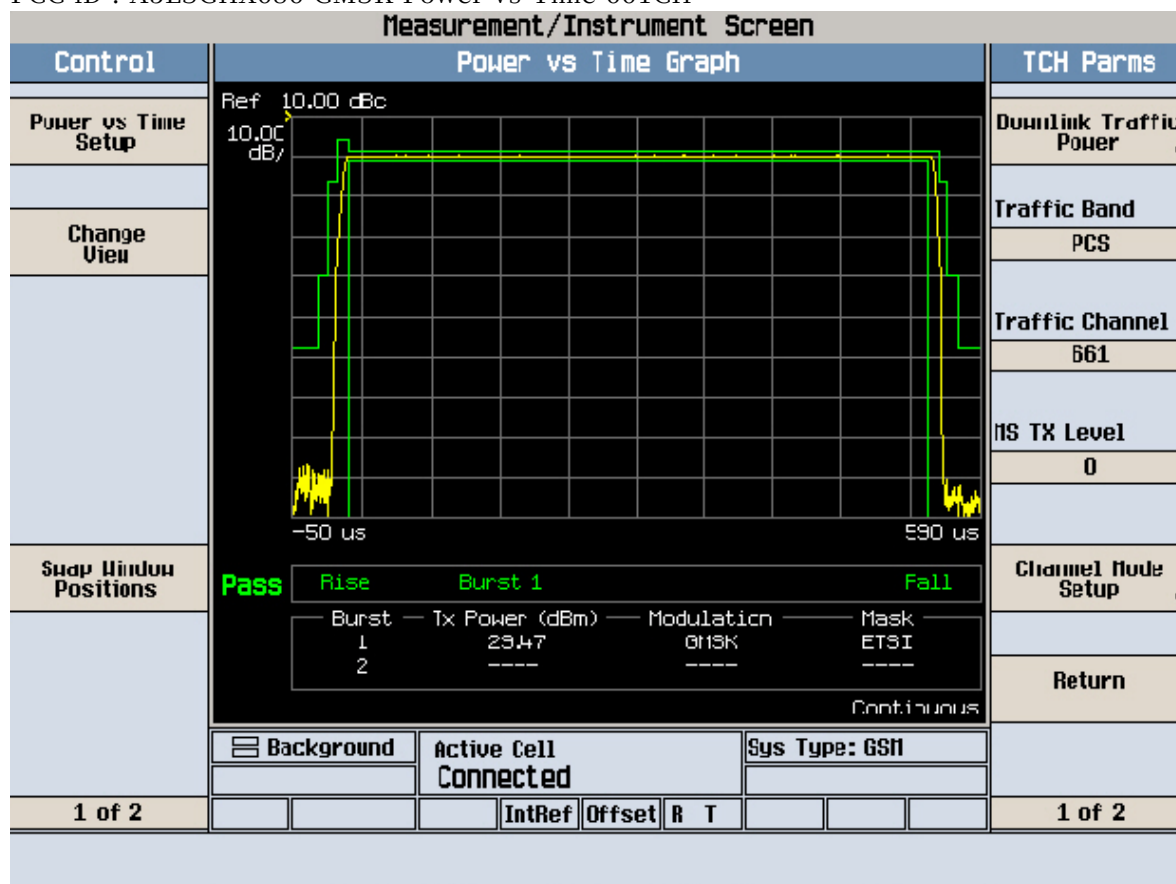

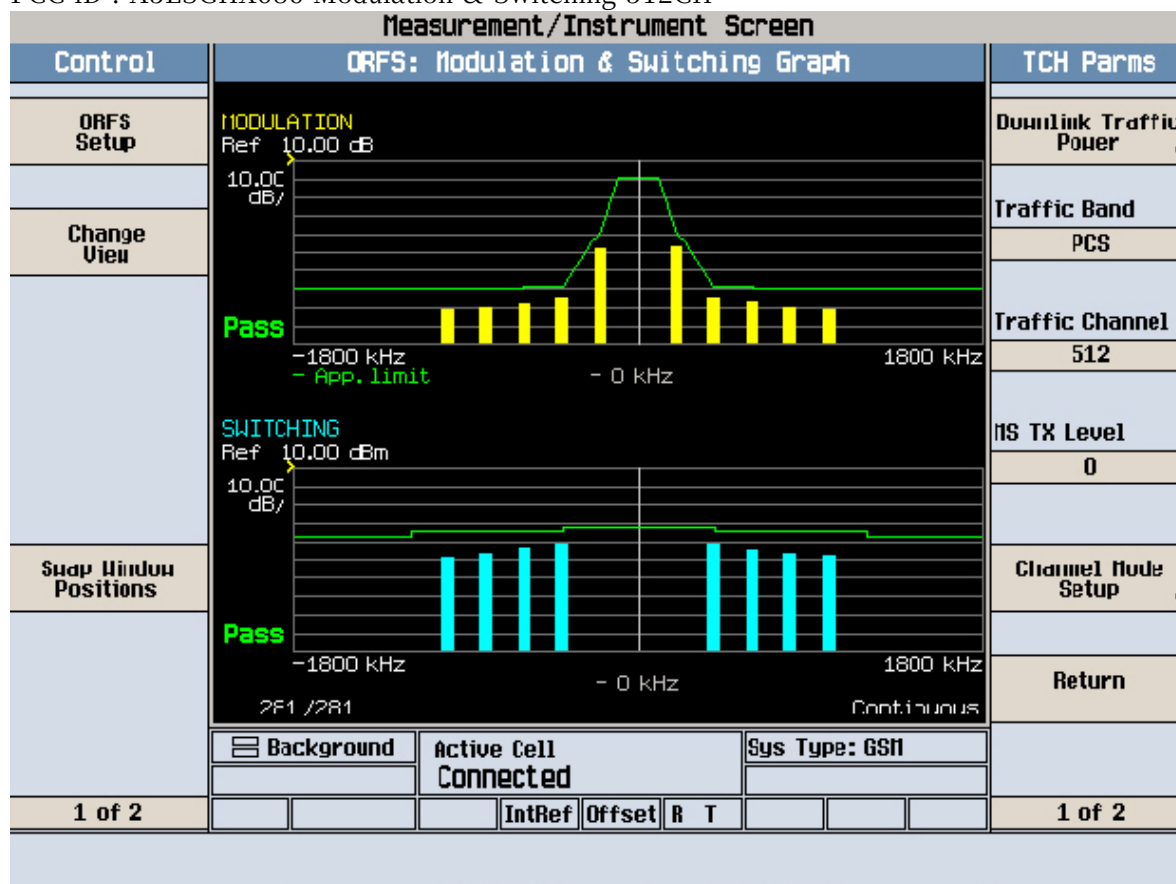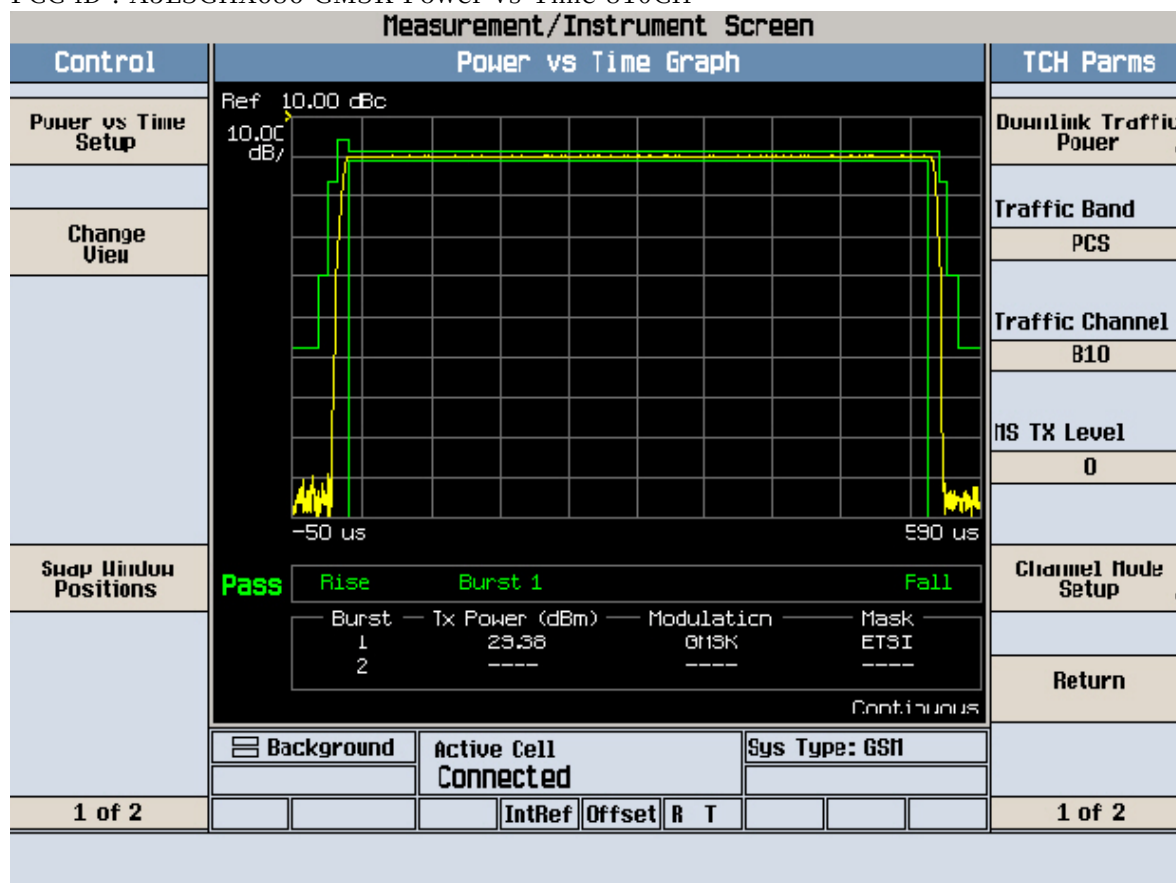

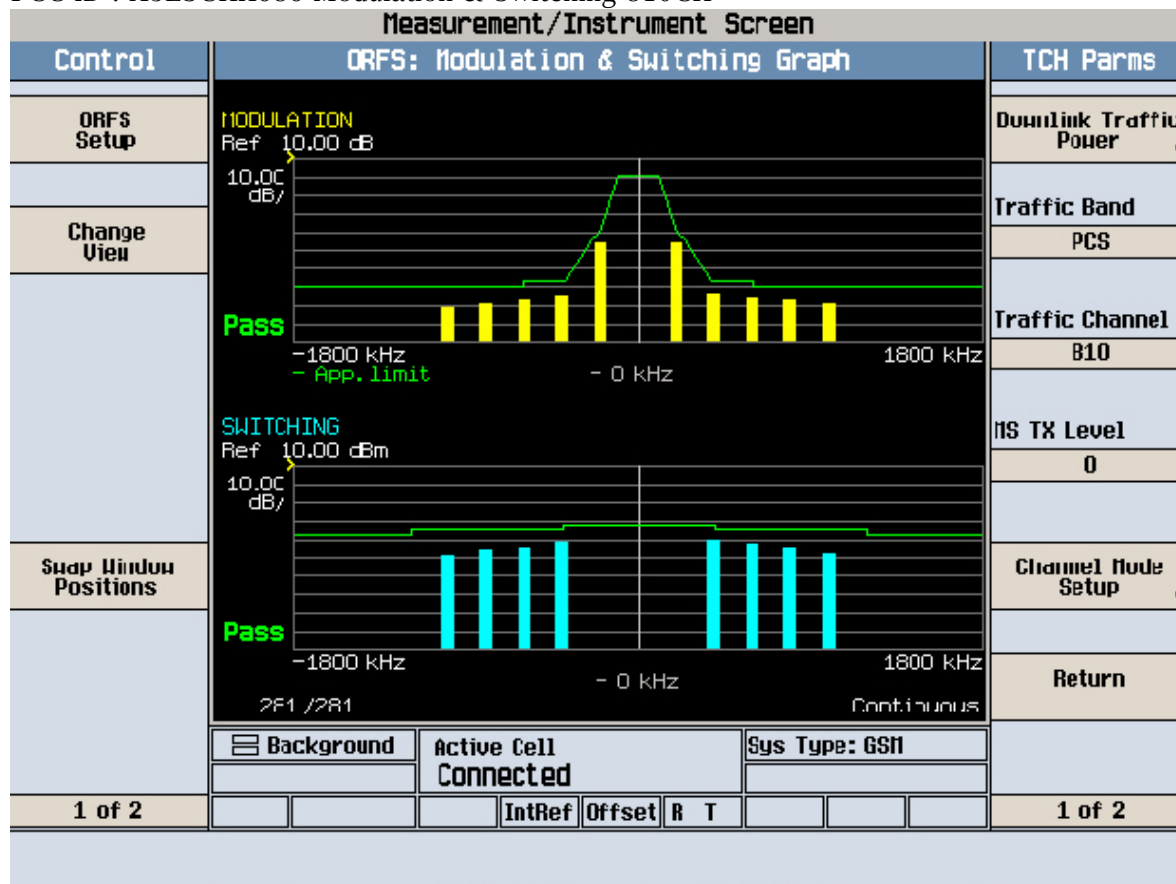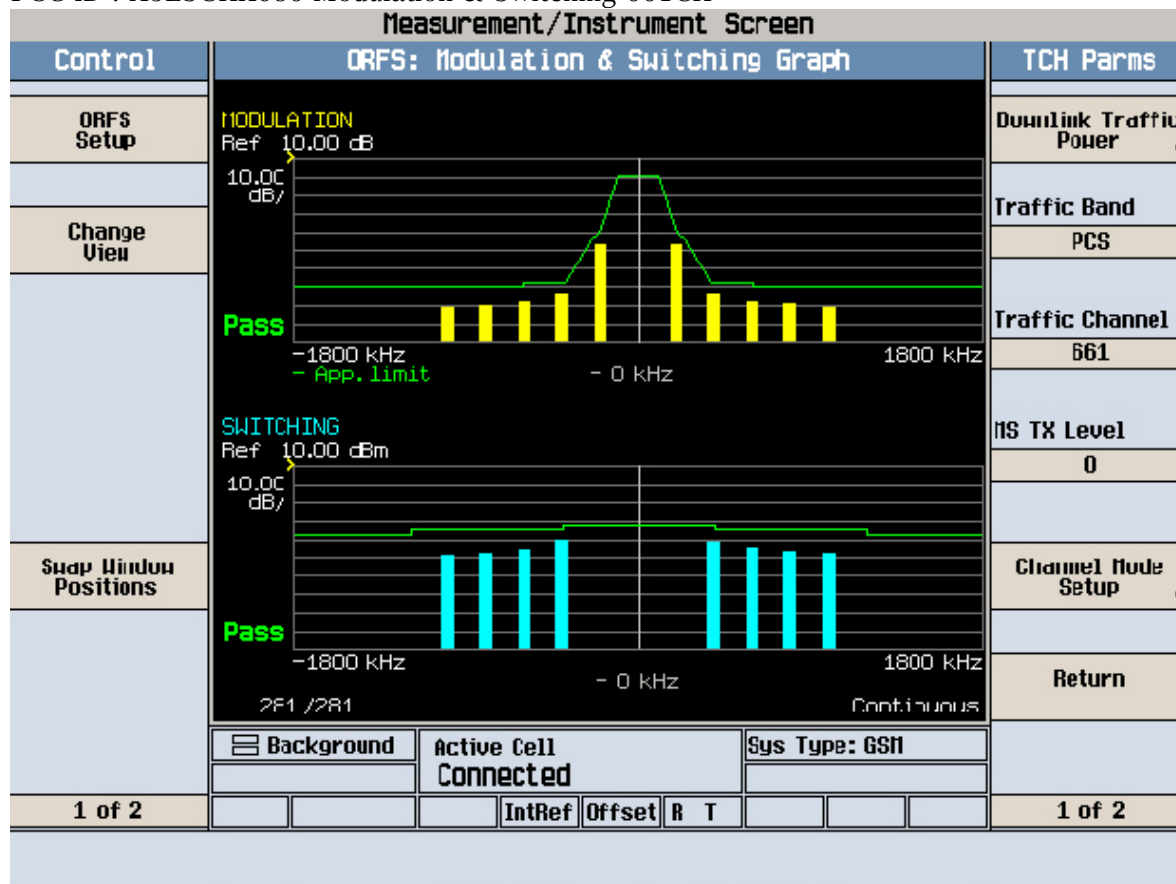


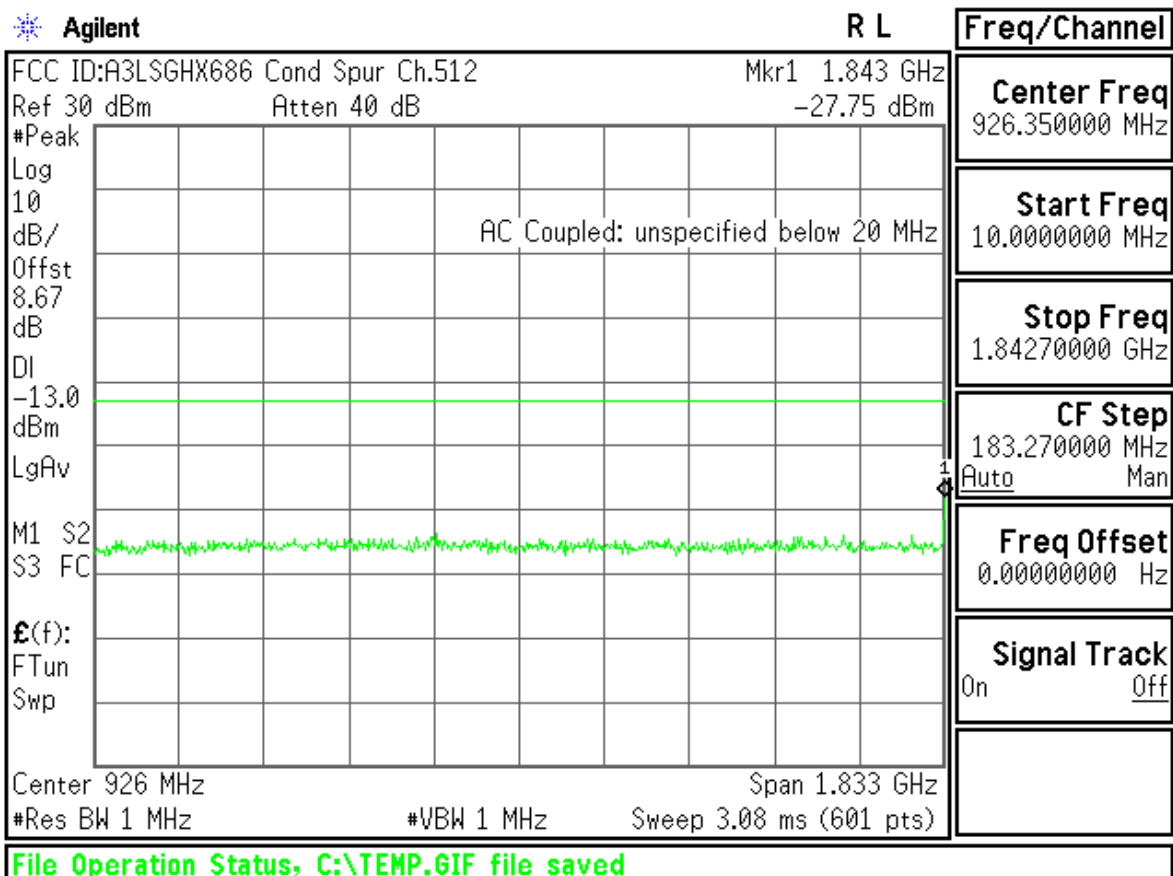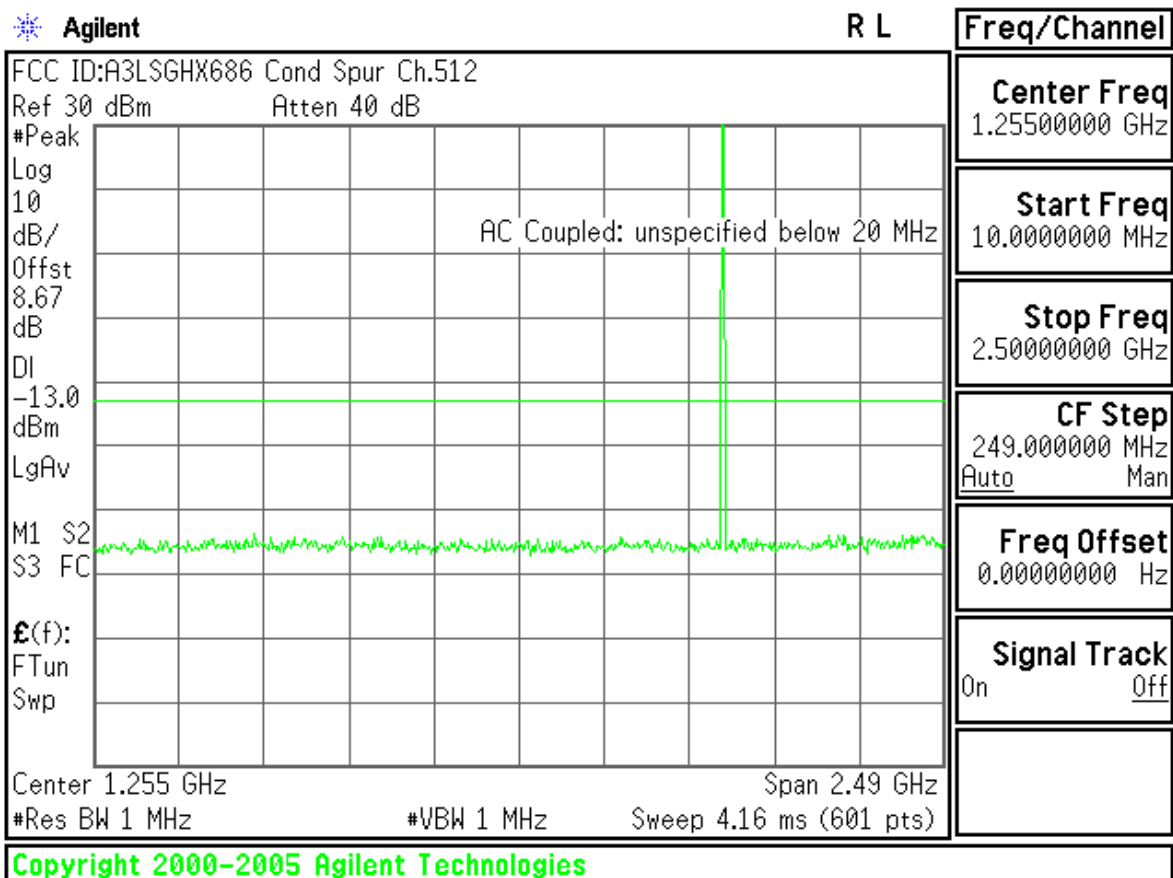

Agilent

R L

Freq/Channel

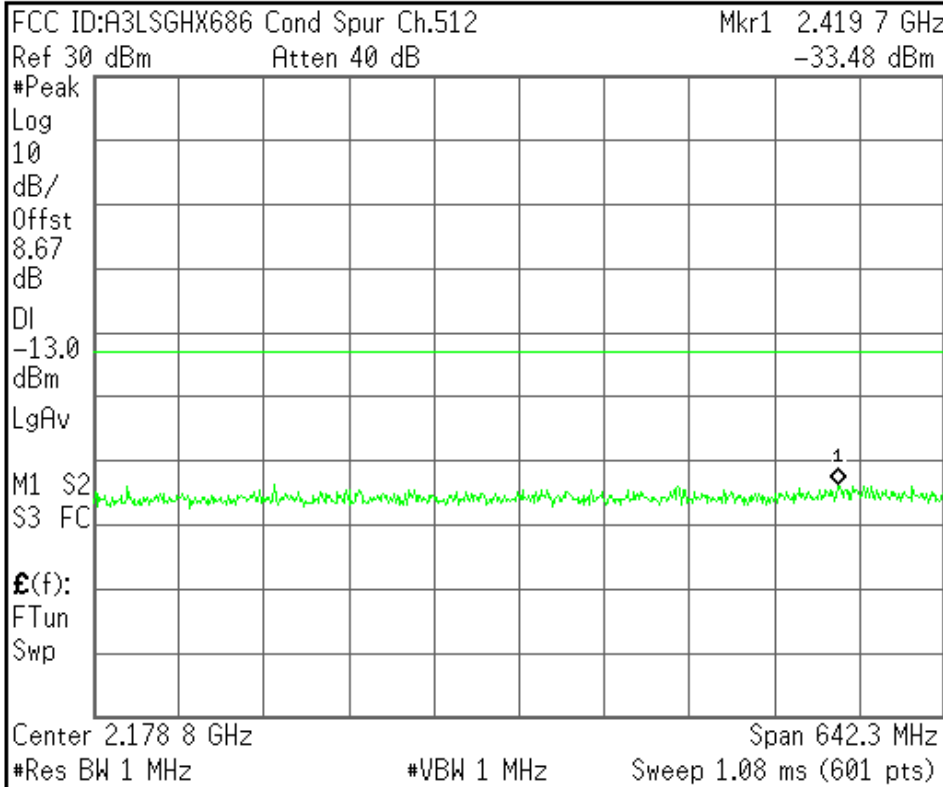

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

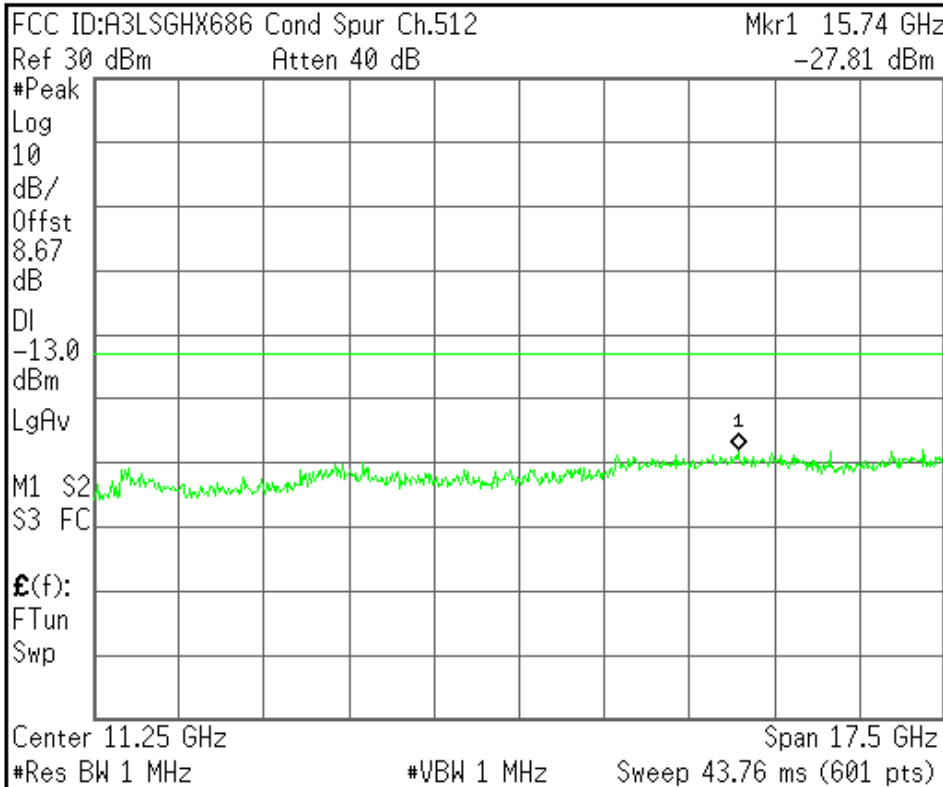

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz



Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

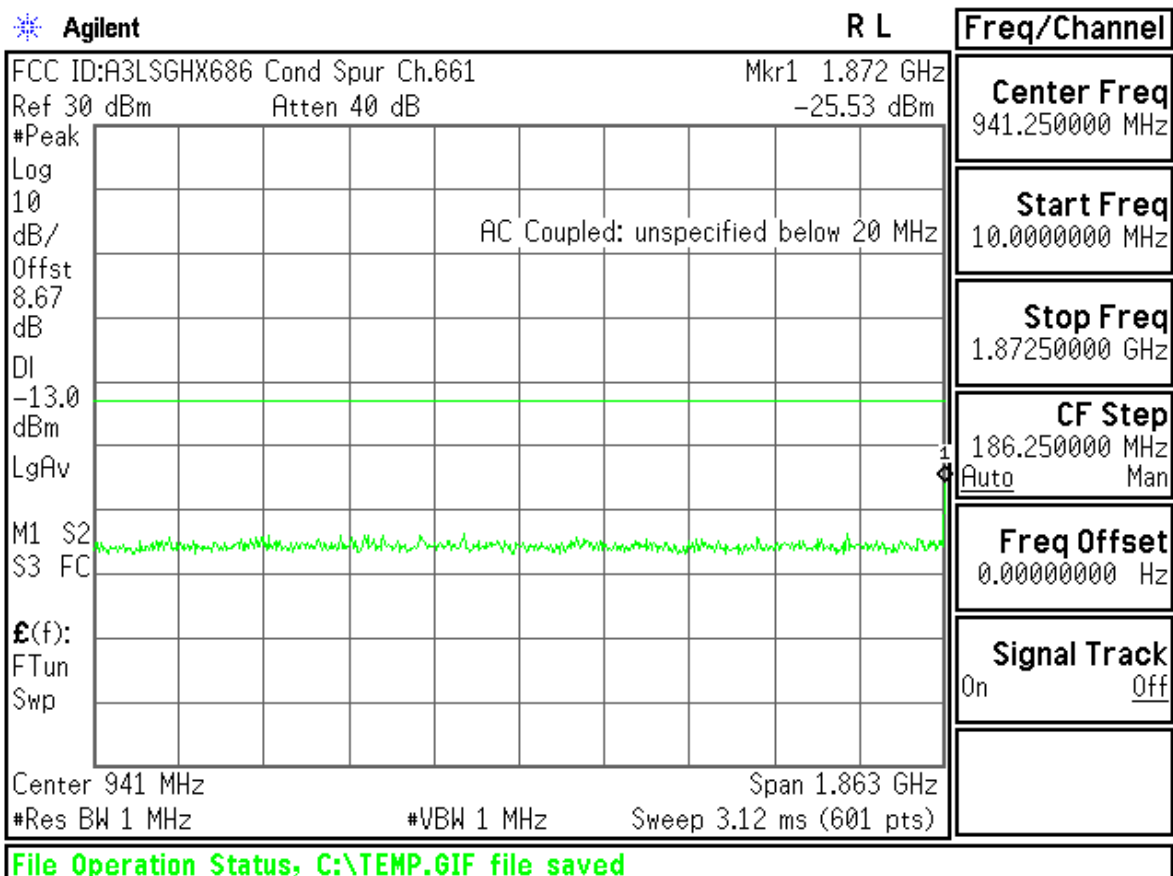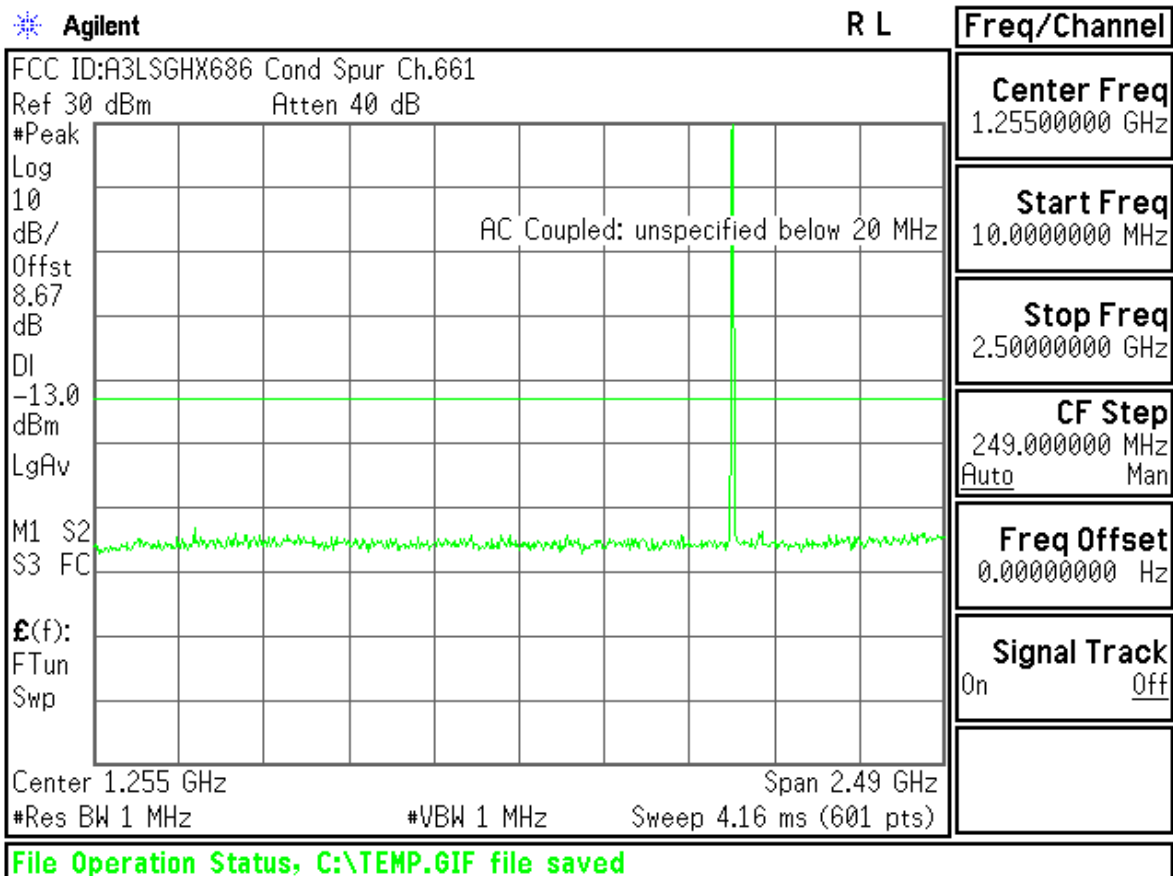

Agilent

R L

Freq/Channel

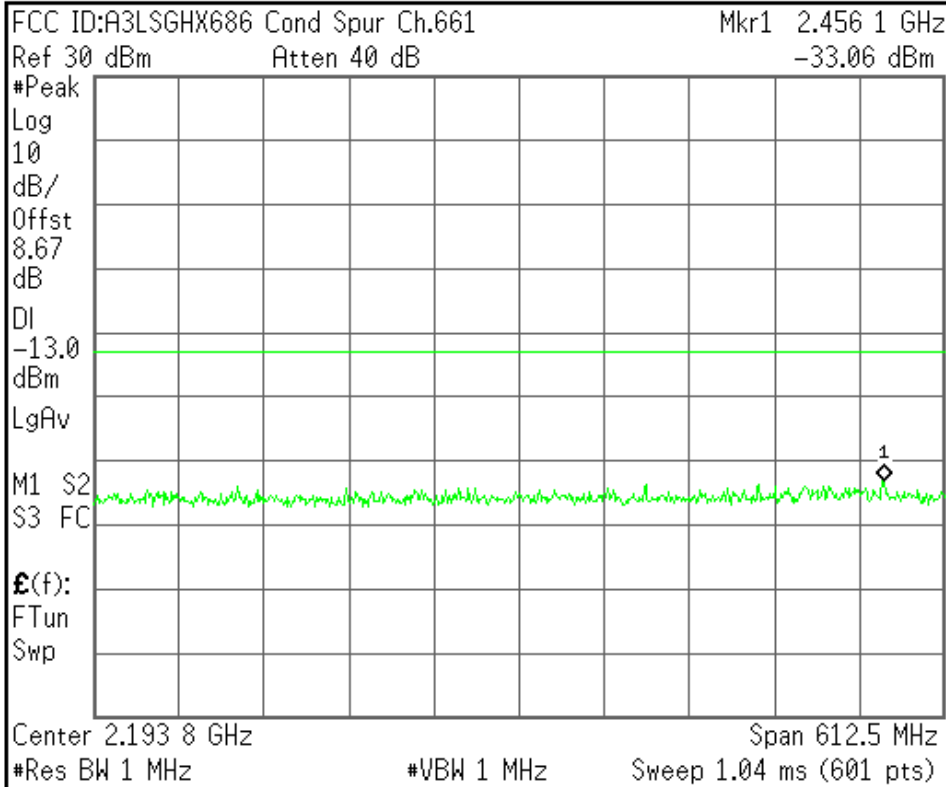

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

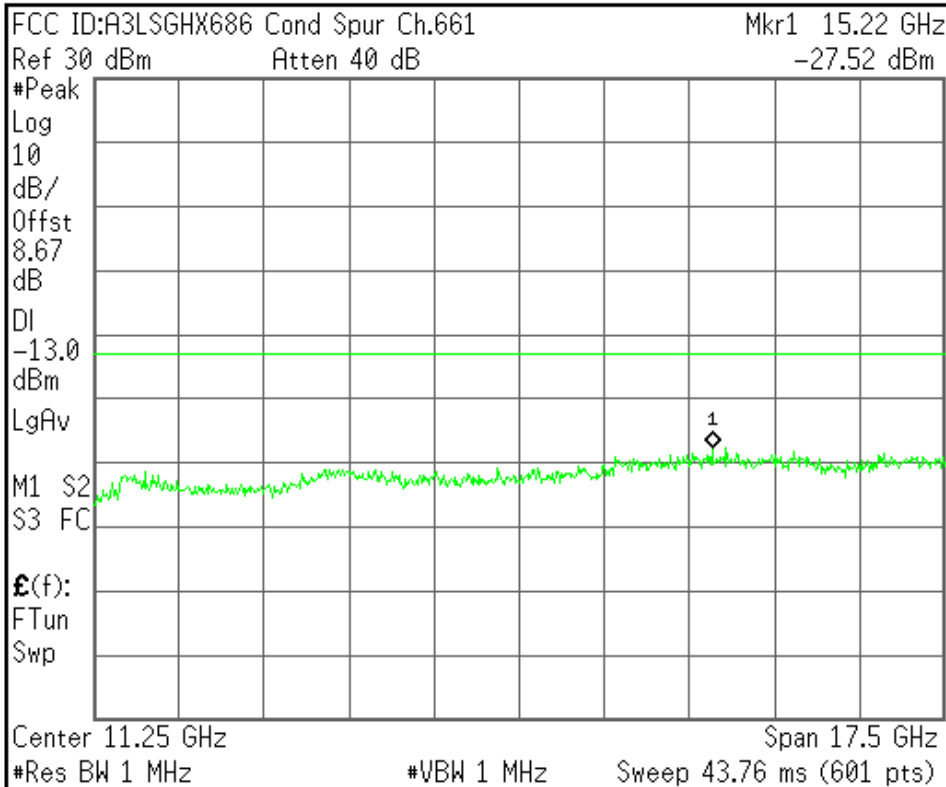

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz



Stop Freq
20.00000000 GHz



CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

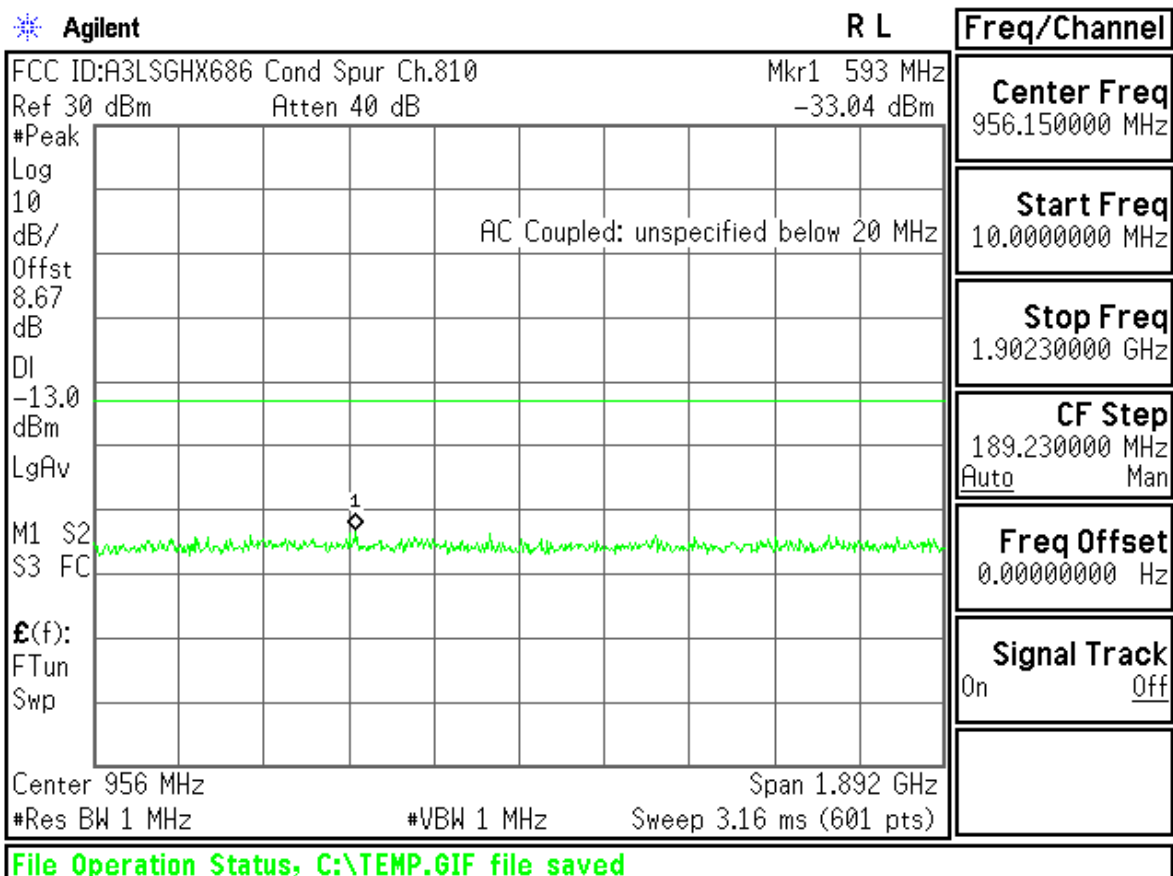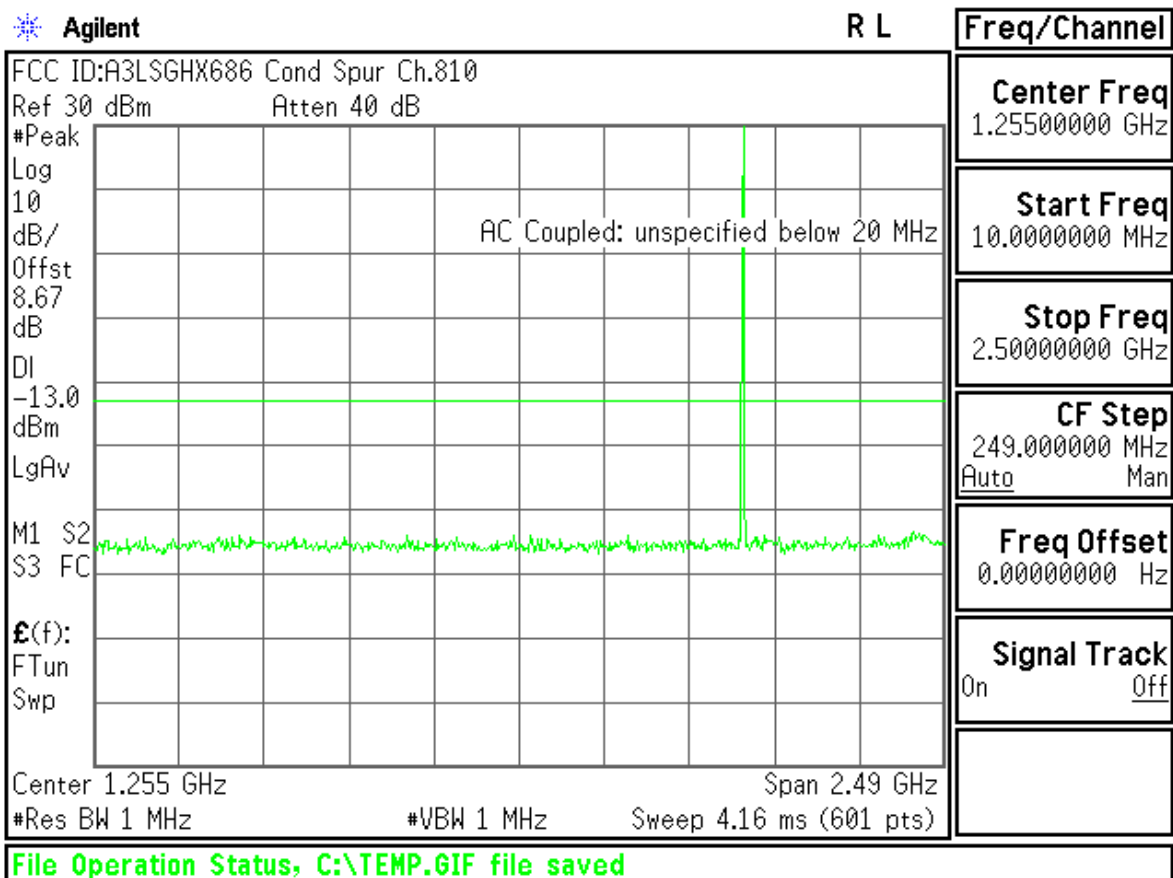

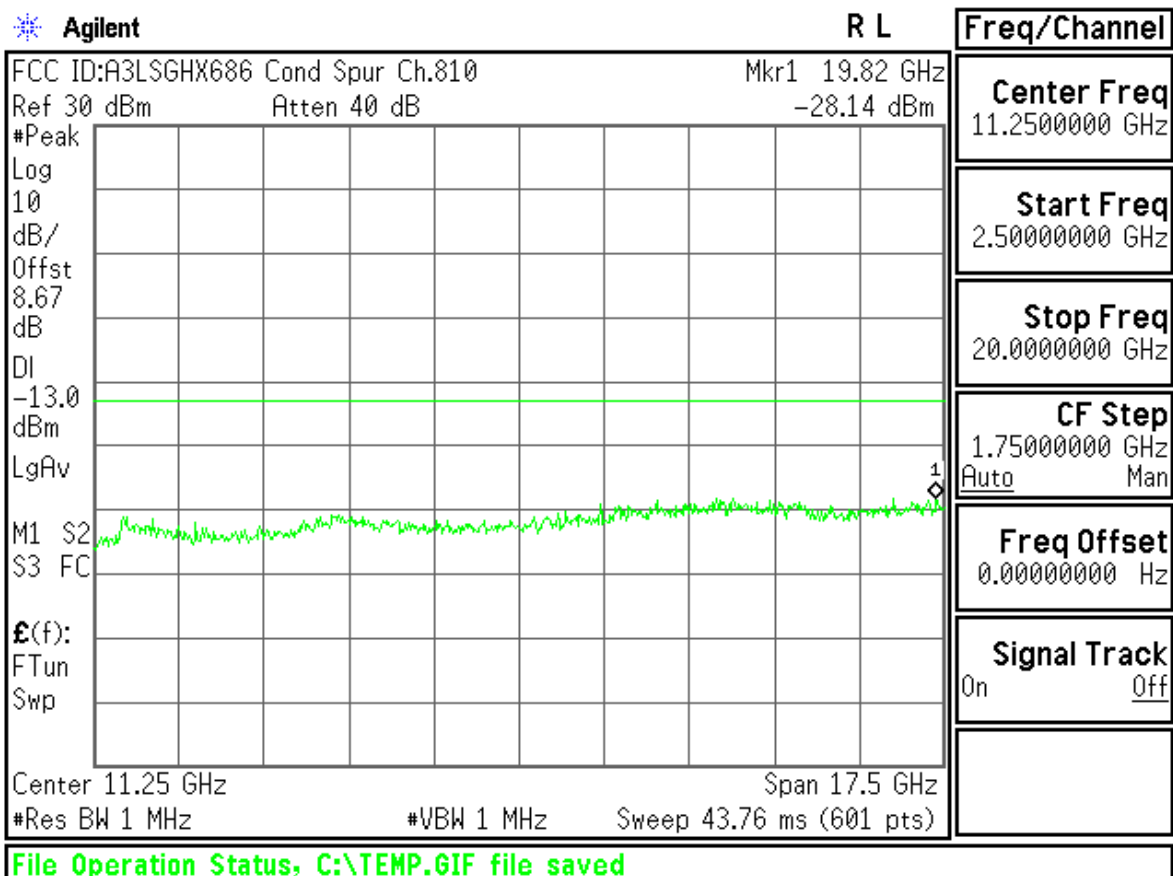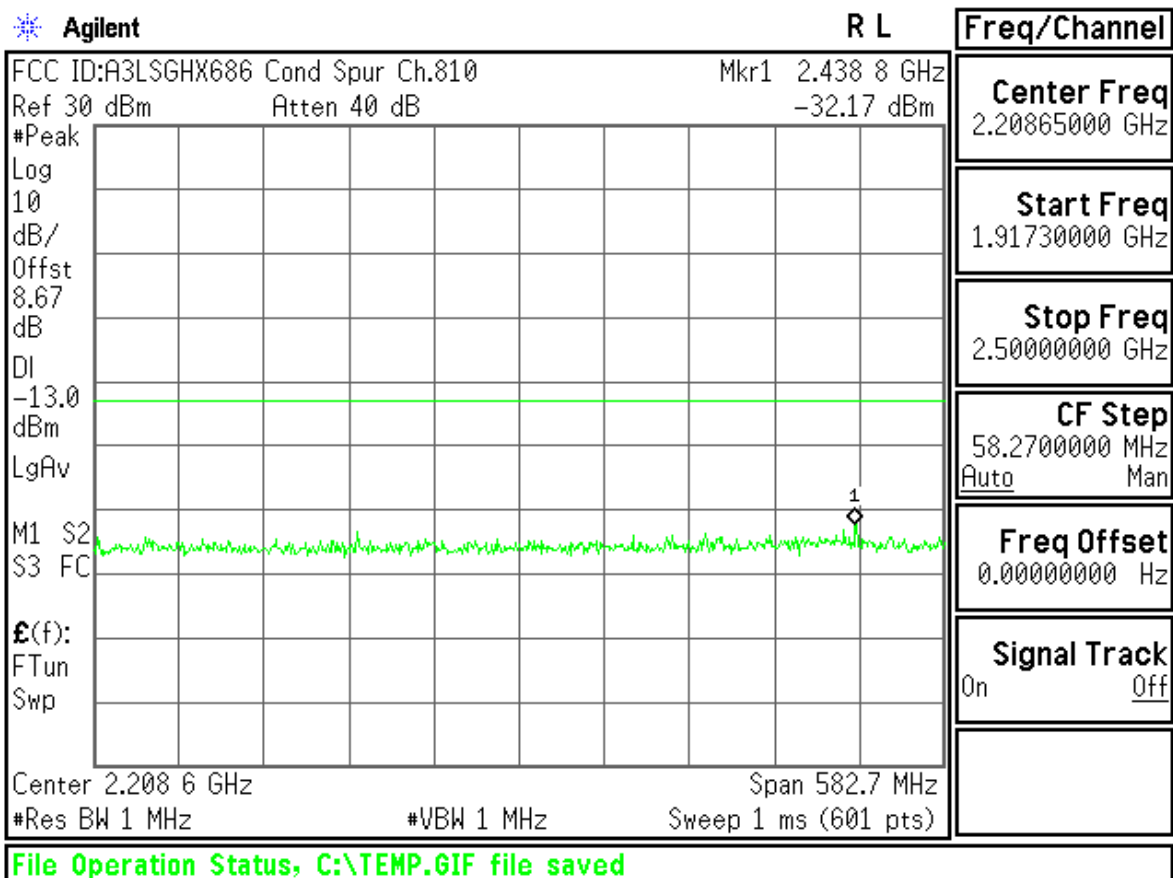

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.67

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

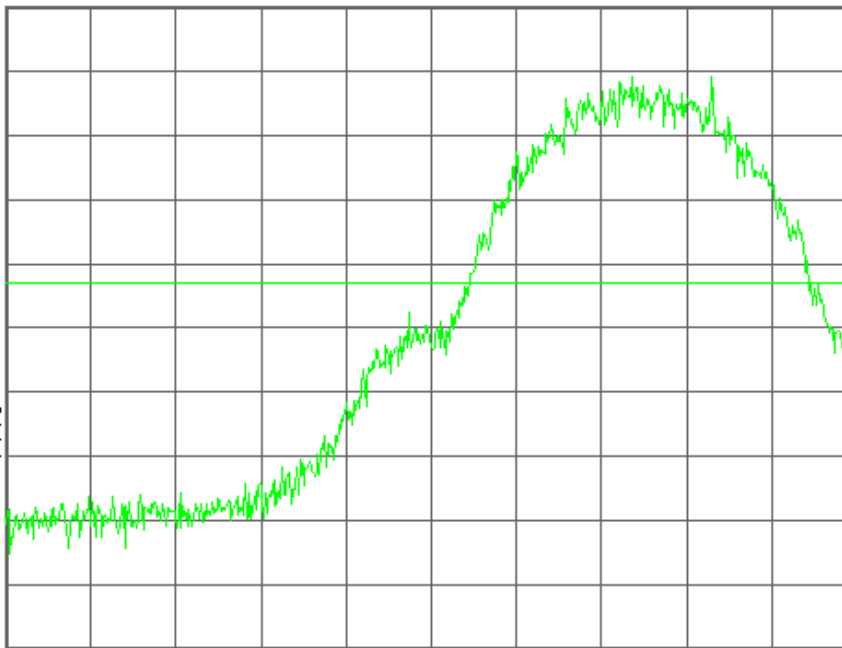

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.512

Mkr1 1.849 997 3 GHz

Ref 30 dBm

Atten 40 dB

-18.94 dBm

#Avg

Log

10

dB/

Offst

8.67

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

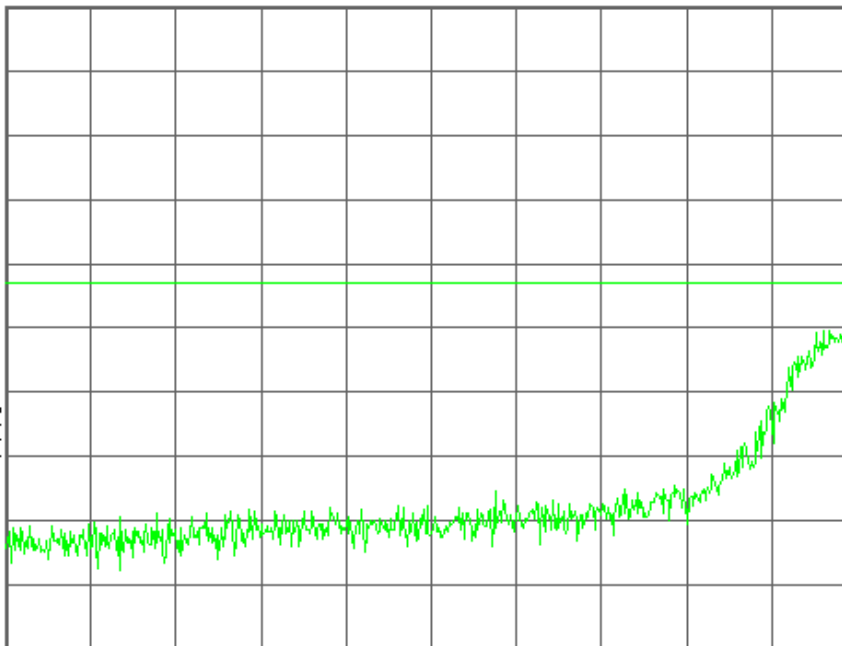

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.67

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

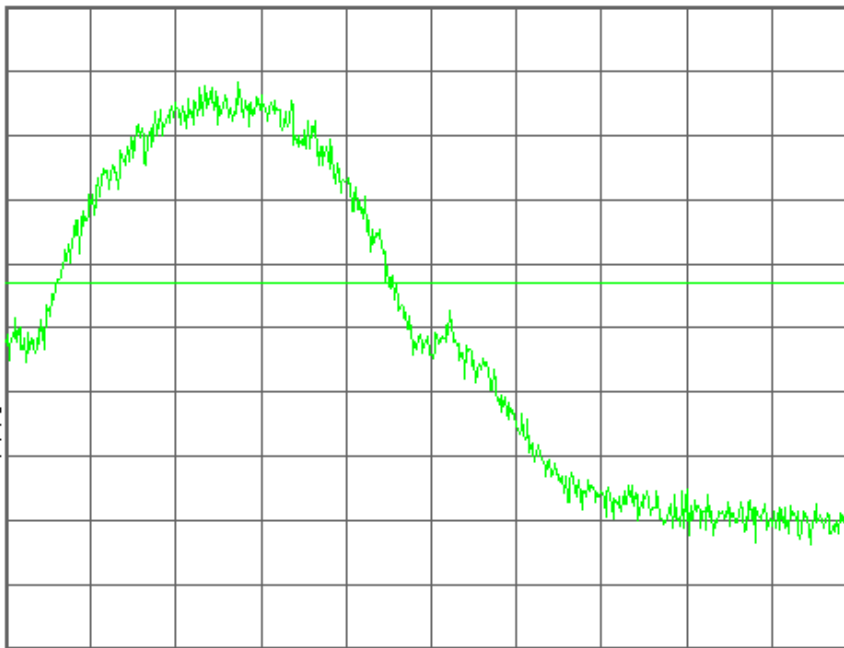

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.810

Mkr1 1.910 002 3 GHz

Ref 30 dBm

Atten 40 dB

-18.73 dBm

#Avg

Log

10

dB/

Offst

8.67

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

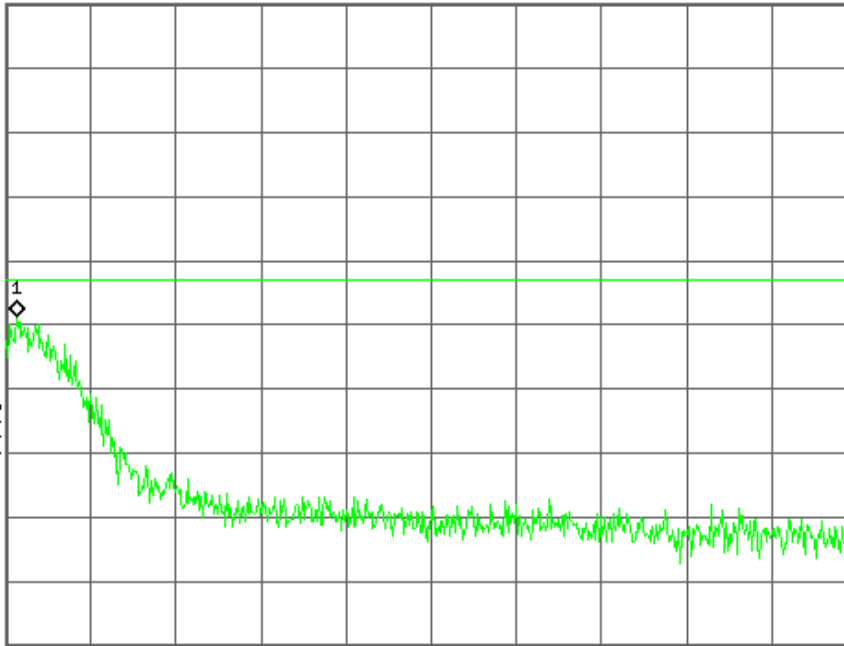

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz



CF Step
81.0000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE850

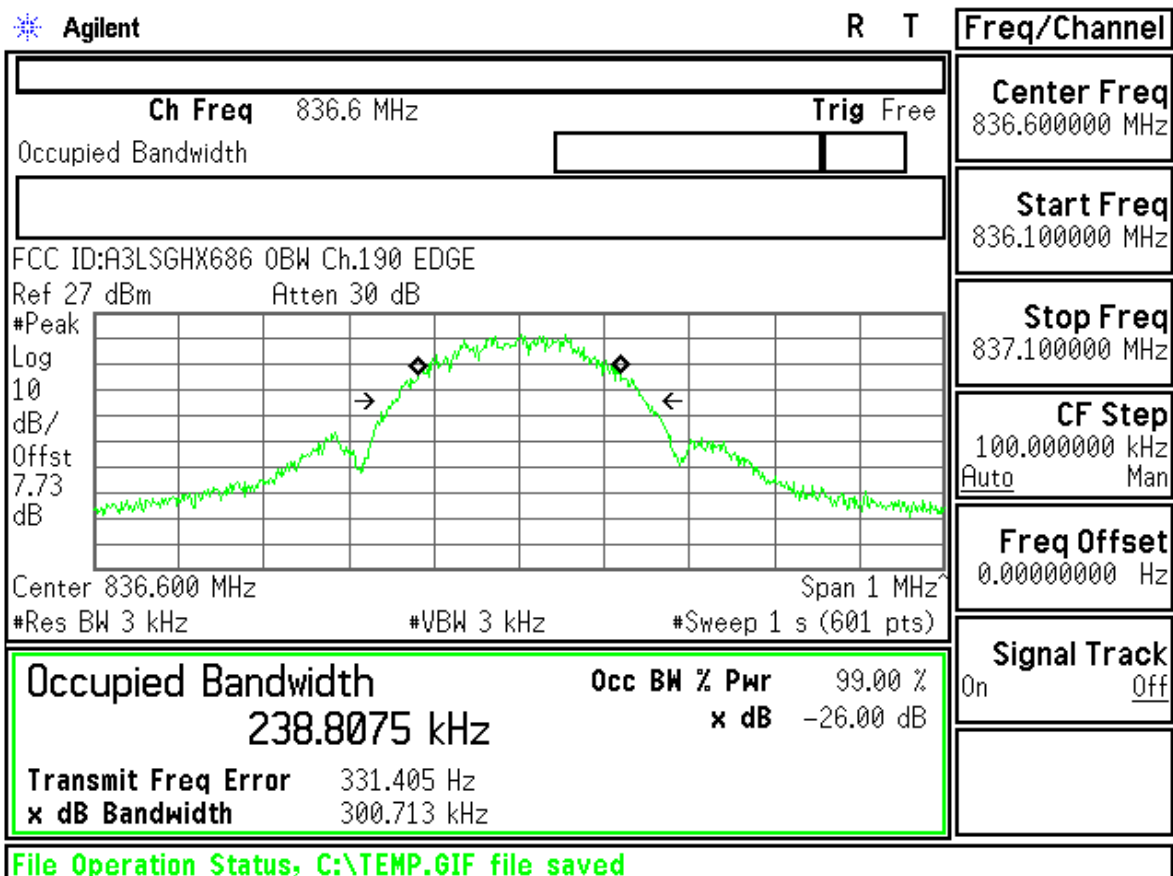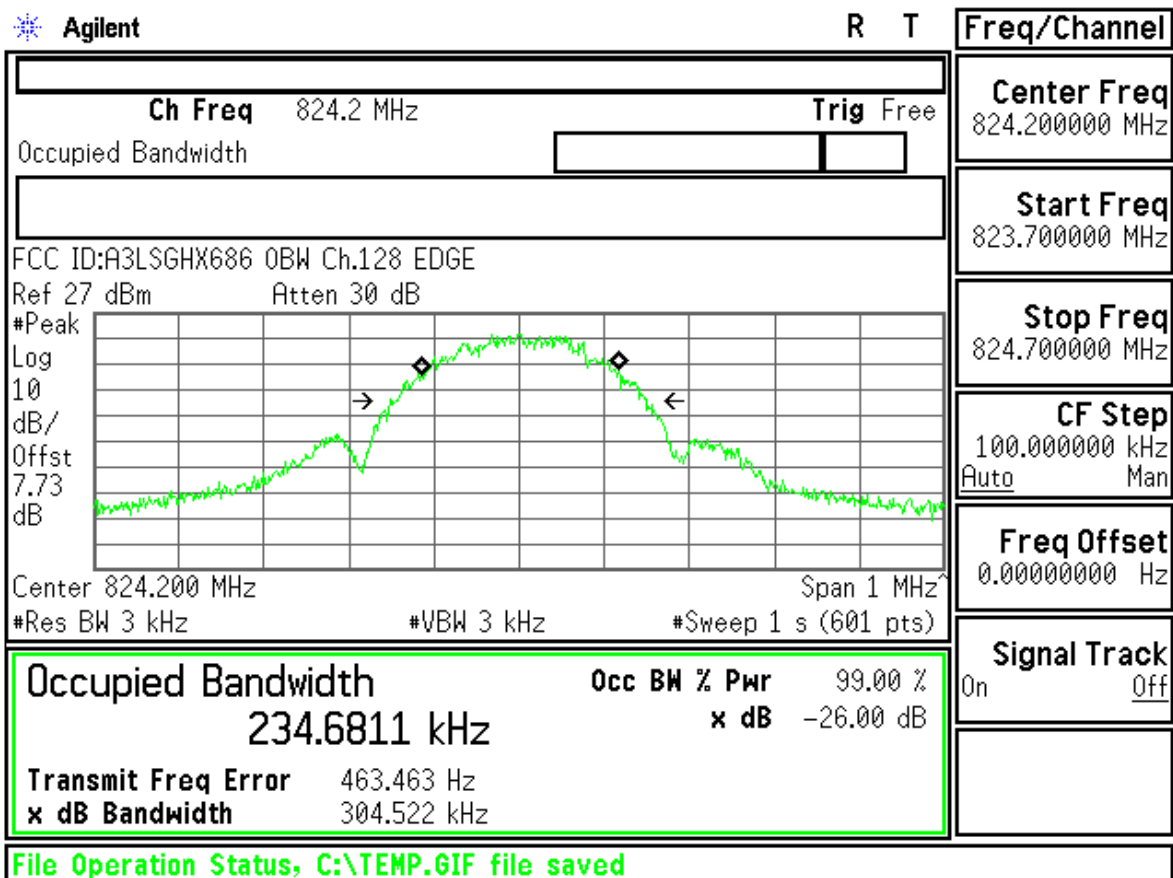

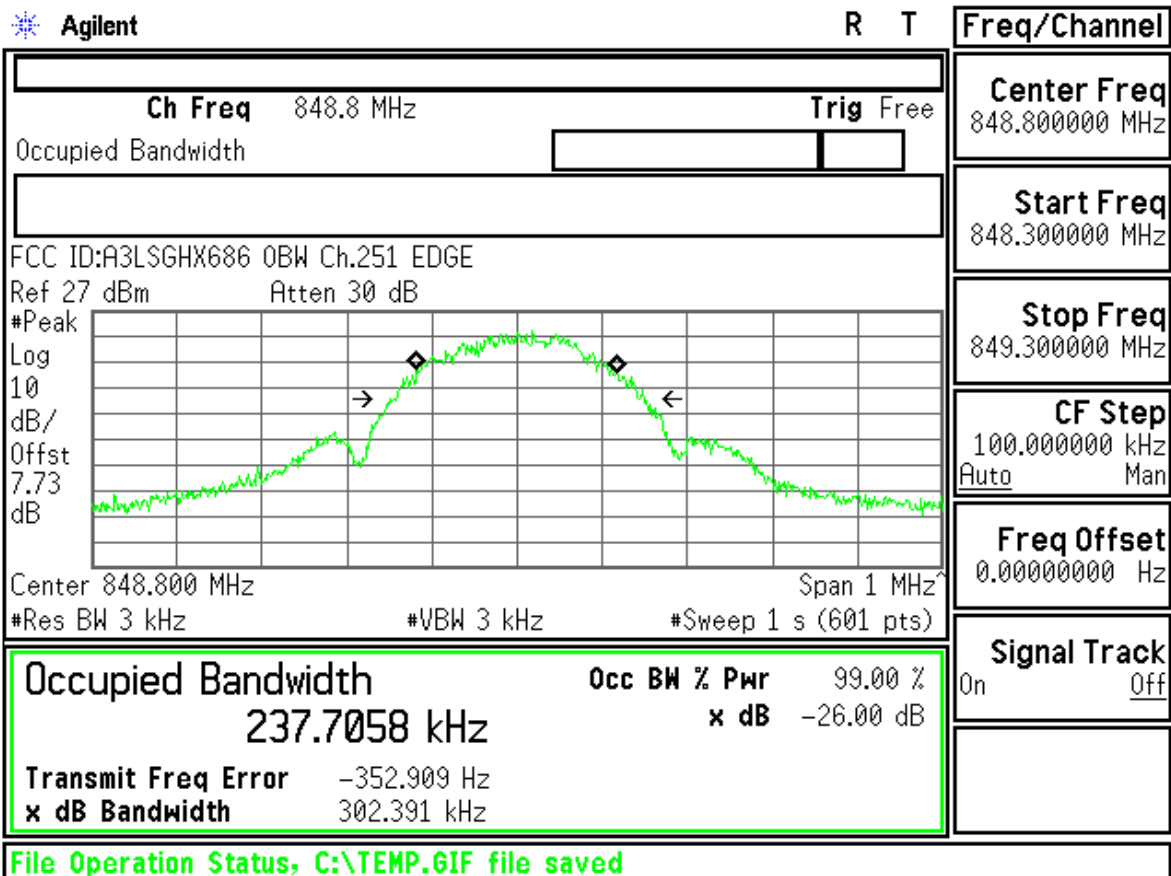

ID : A3LSGHX686 Transmit Power 128CH EDGE

Control	EGPRS Transmit Power				PDCH Params	
EGPRS Transmit Power Setup	EPSS Burst Power 26.52 dBm EPSS Est Carrier Power 26.70 dBm				Downlink Traffic Power	
					Traffic Band	GSM850
					Traffic Channel	128
					MS TX Level	
Swap Window Positions					Modulation Coding Scheme	
					Return	
	Background	Active Cell Transferring		Sys Type: EGPRS		
1 of 2		IntRef	Offset	R T		1 of 2

FCC ID : A3LSGHX686 Transmit Power 190CH EDGE

Measurement/Instrument Screen											
Control		EGPRS Transmit Power						PDCH Parms			
EGPRS Transmit Power Setup ▾		EPSK Burst Power 26.38 dBm EPSK Est Carrier Power 26.58 dBm Single						Downlink Traffic Power ▾			
Swap Window Positions								Traffic Band			
								GSM850			
								Traffic Channel			
								190			
								MS TX Level ▾			
								Modulation Coding Scheme ▾			
								Return			
		Background		Active Cell Transferring		Sys Type: EGPRS					
1 of 2					IntRef	Offset	R T				1 of 2

FCC ID : A3LSGHX686 Transmit Power 251CH EDGE

Measurement/Instrument Screen											
Control		EGPRS Transmit Power						PDCH Parms			
EGPRS Transmit Power Setup ▾		EPSK Burst Power 26.74 dBm EPSK Est Carrier Power 26.56 dBm Single						Downlink Traffic Power ▾			
Swap Window Positions								Traffic Band			
								GSM850			
								Traffic Channel			
								251			
								MS TX Level ▾			
								Modulation Coding Scheme ▾			
								Return			
		Background		Active Cell Transferring		Sys Type: EGPRS					
1 of 2					IntRef	Offset	R T				1 of 2

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.128 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

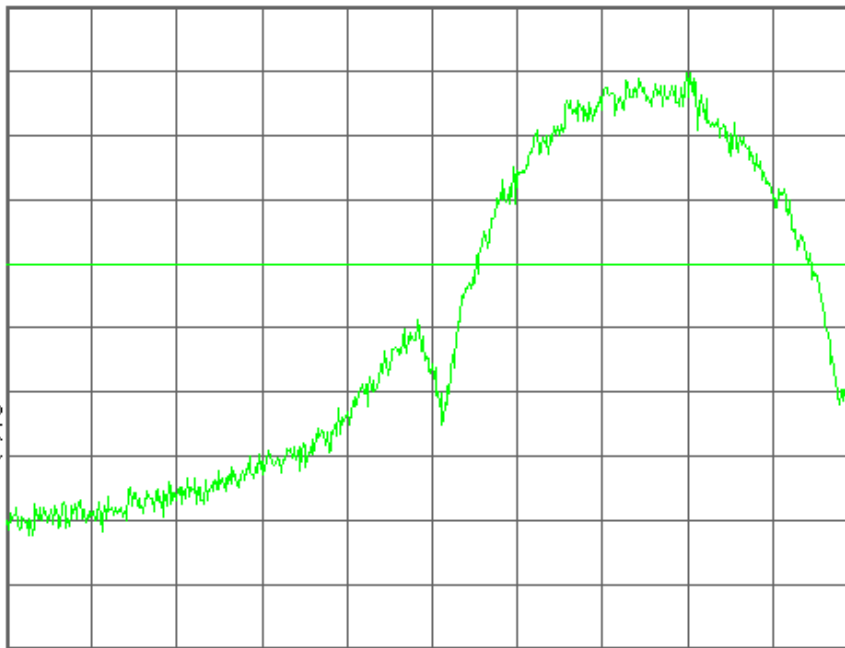

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.128 EDGE

Mkr1 823.985 3 MHz

Ref 27 dBm

Atten 30 dB

-22.90 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

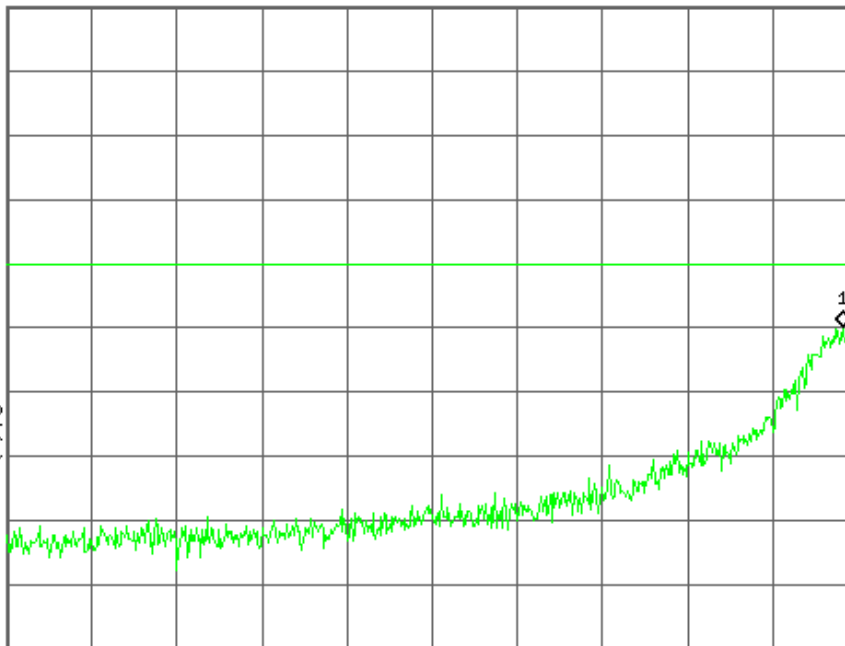

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.251 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

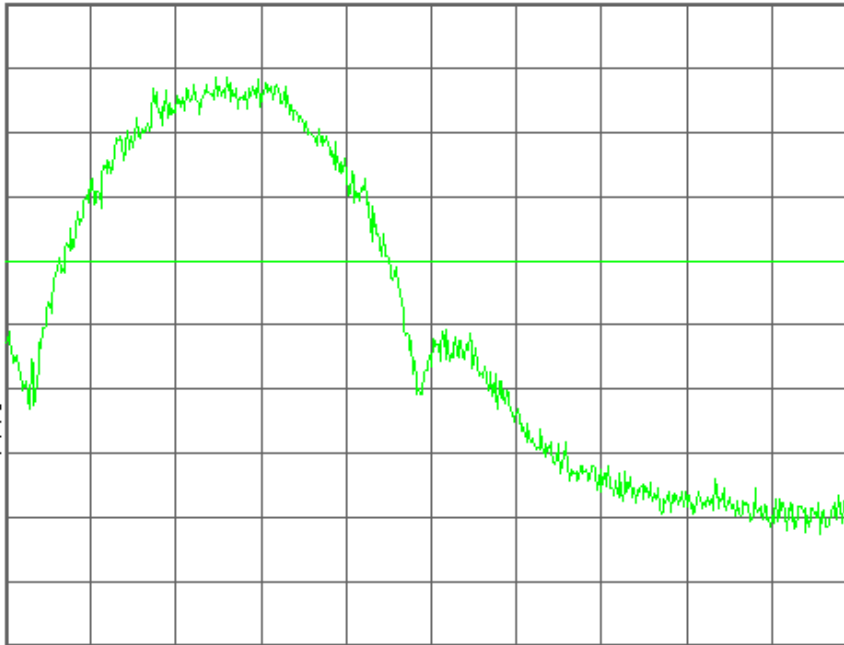

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.251 EDGE

Mkr1 849.021 4 MHz

Ref 27 dBm

Atten 30 dB

-23.85 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

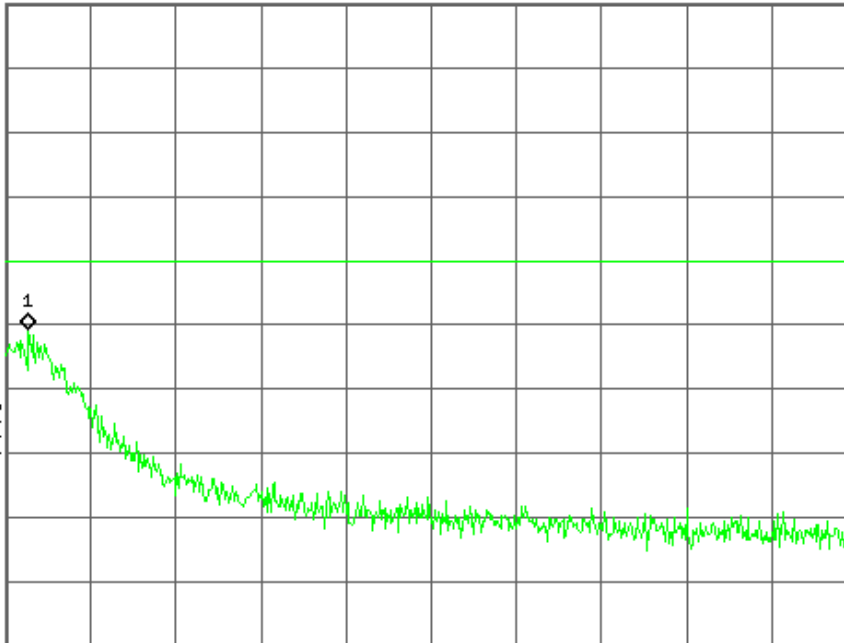

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz



CF Step
81.0000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE1900

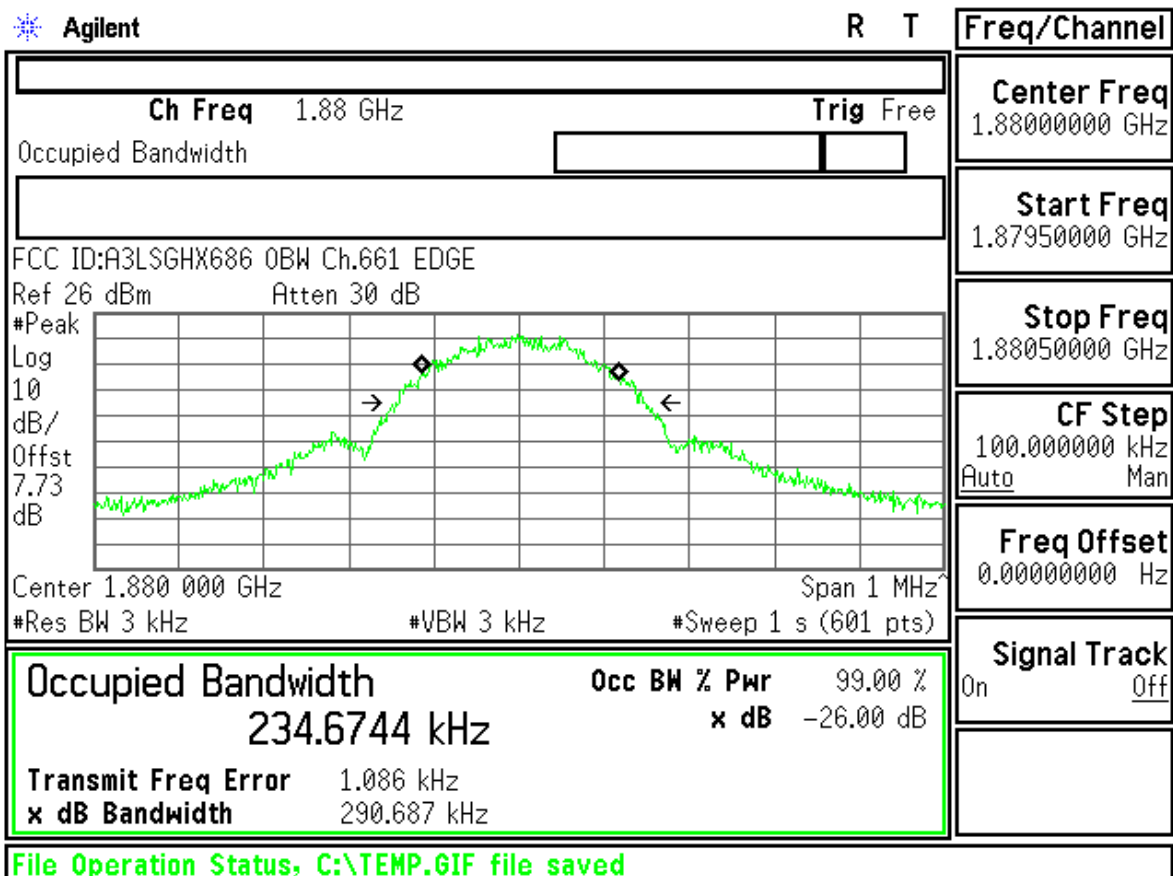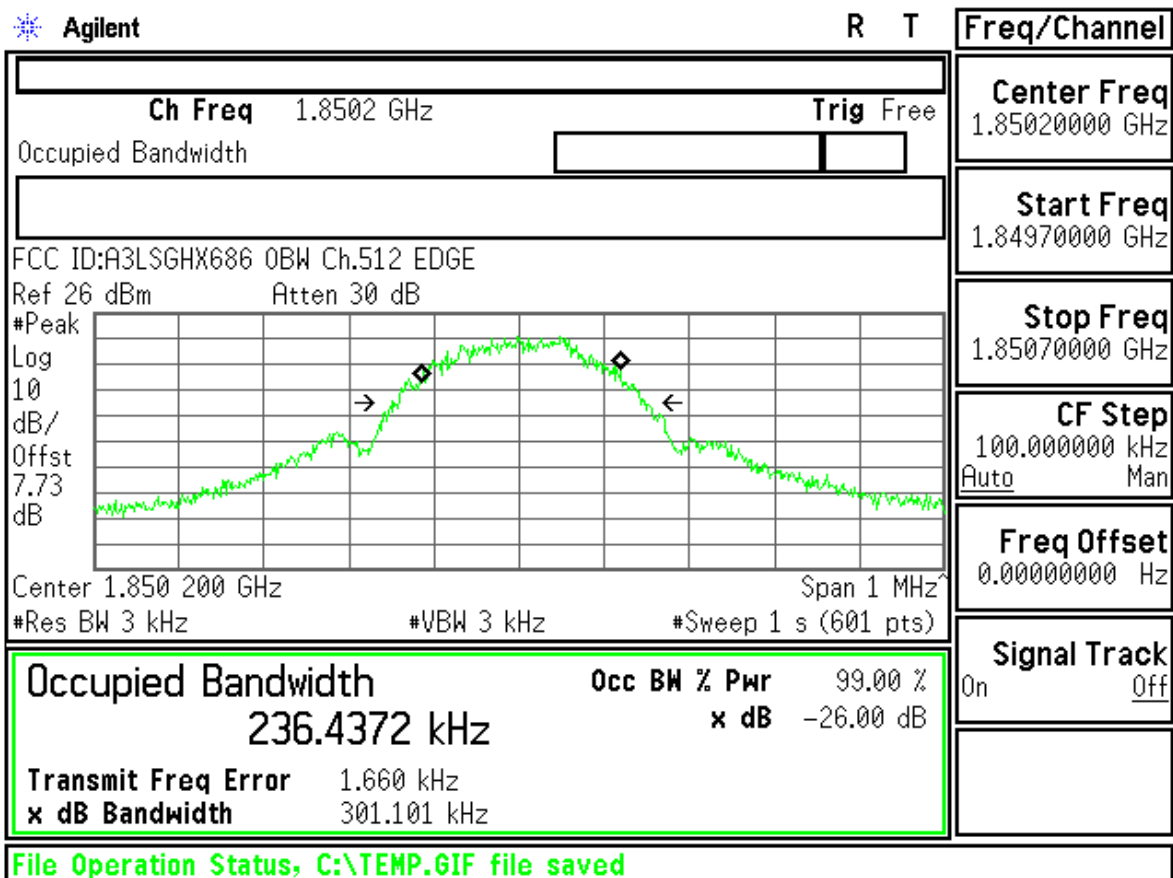

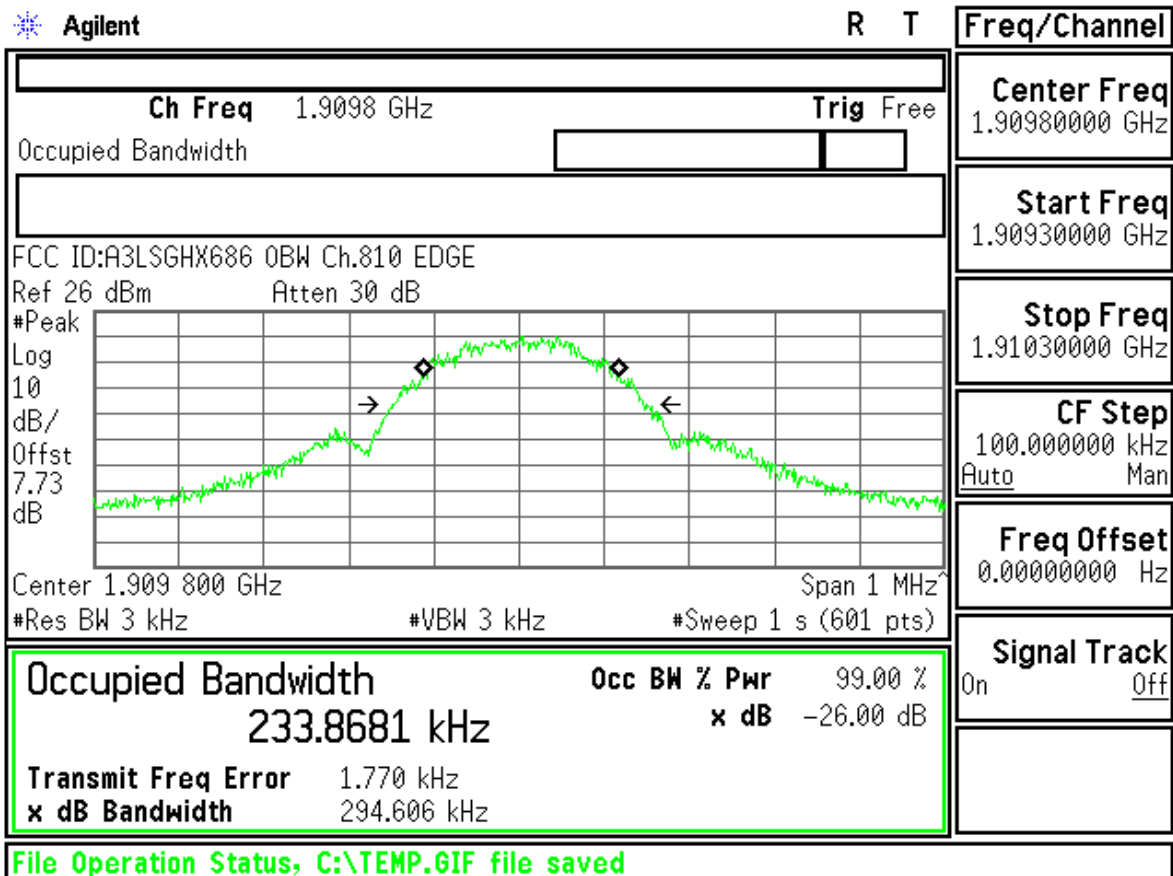

ID : A3LSGHX686 Transmit Power 512CH EDGE

Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Params		
EGPRS Transmit Power Setup	EPSK Burst Power 25.74 dBm EPSK Est Carrier Power 25.93 dBm						Downlink Traffic Power		
Swap Window Positions	Single						Traffic Band		
							PCS		
							Traffic Channel		
							512		
							MS TX Level		
							Modulation Coding Scheme		
1 of 2	Background Active Cell Transferring Sys Type: EGPRS						Return		
							1 of 2		

Measurement/Instrument Screen												
Control		EGPRS Transmit Power						PDCH Params				
EGPRS Transmit Power Setup ▾		EPSK Burst Power 25.63 dBm EPSK Est Carrier Power 25.85 dBm Single						Downlink Traffic Power ▾				
Swap Window Positions								Traffic Band				
								PCS				
								Traffic Channel				
								661				
								MS TX Level ▾				
								Modulation Coding Scheme ▾				
								Return				
		Background		Active Cell Transferring			Sys Type: EGPRS					
1 of 2					IntRef	Offset	R	T				1 of 2

Measurement/Instrument Screen												
Control		EGPRS Transmit Power						PDCH Params				
EGPRS Transmit Power Setup ▾		EPSK Burst Power 25.64 dBm EPSK Est Carrier Power 25.72 dBm Single						Downlink Traffic Power ▾				
Swap Window Positions								Traffic Band				
								PCS				
								Traffic Channel				
								810				
								MS TX Level ▾				
								Modulation Coding Scheme ▾				
								Return				
		Background		Active Cell Transferring			Sys Type: EGPRS					
1 of 2					IntRef	Offset	R	T				1 of 2

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

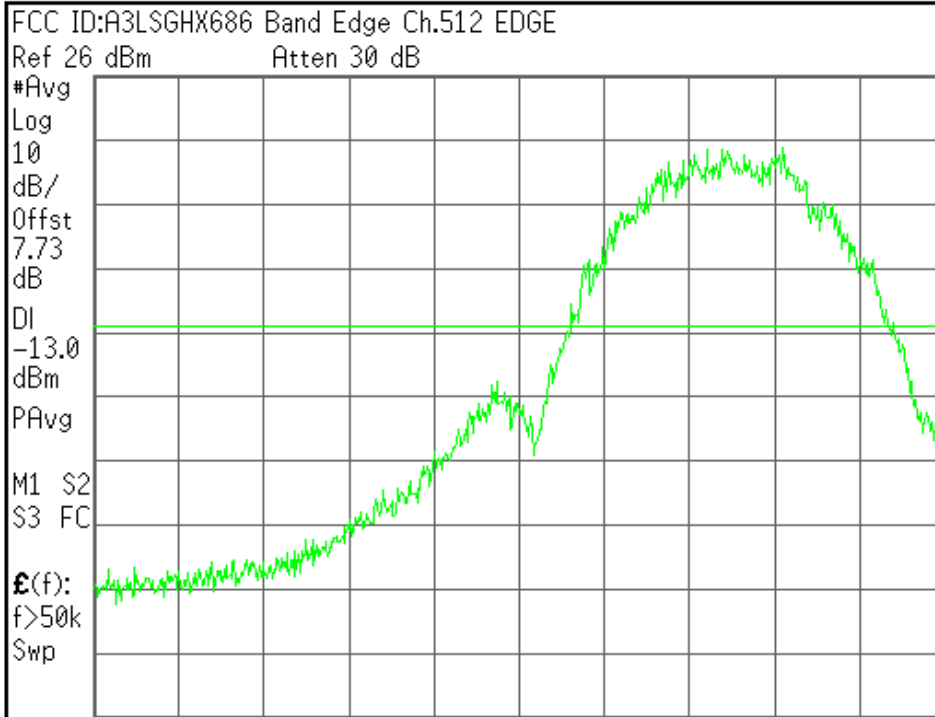

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.512 EDGE

Mkr1 1.849 971 9 GHz

Ref 26 dBm

Atten 30 dB

-22.30 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

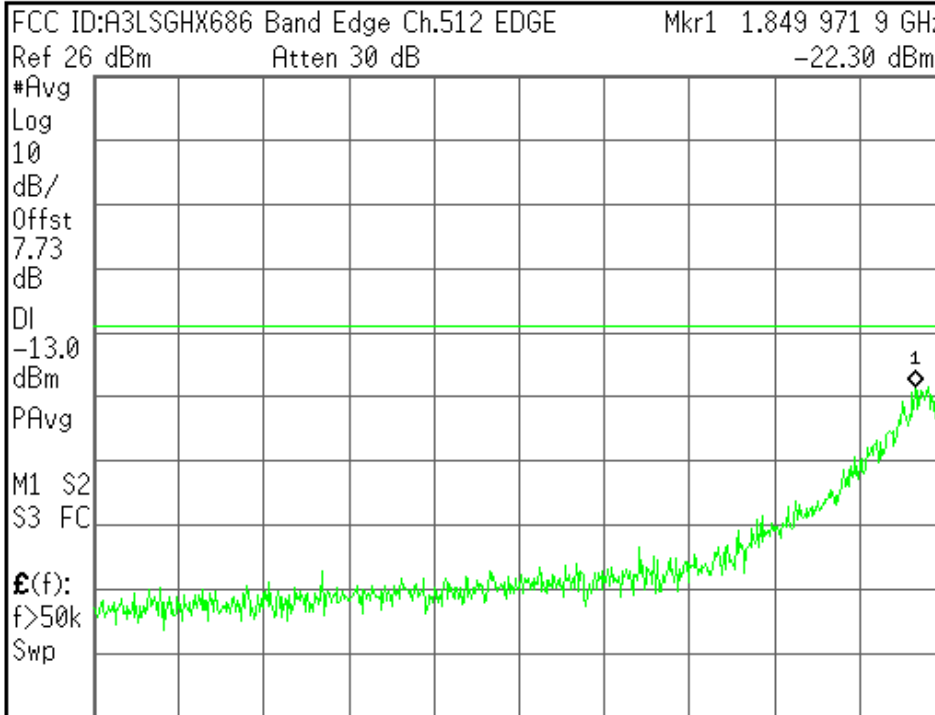

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.810 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

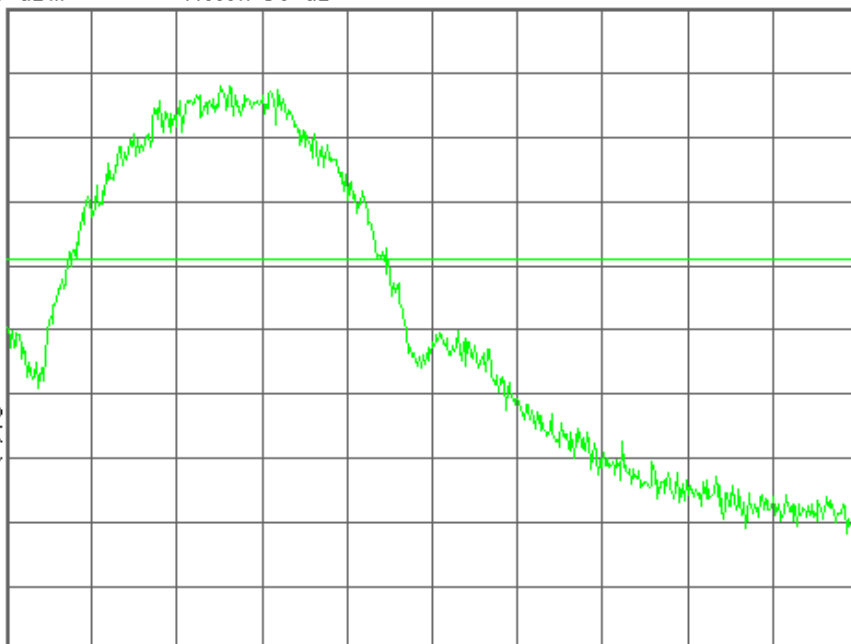

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHX686 Band Edge Ch.810 EDGE

Mkr1 1.910 006 5 GHz

Ref 26 dBm

Atten 30 dB

-23.22 dBm

#Avg

Log

10

dB/

Offst

7.73

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

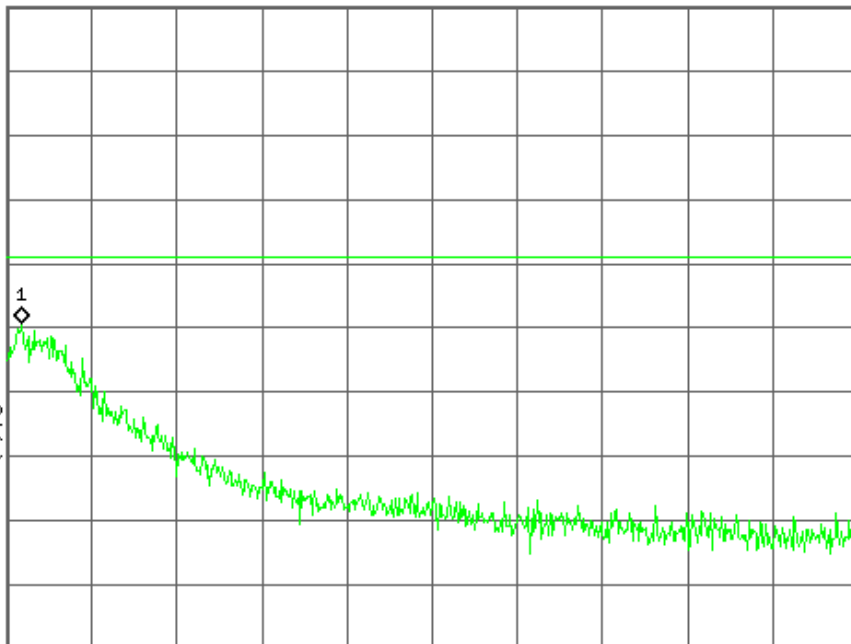

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved