




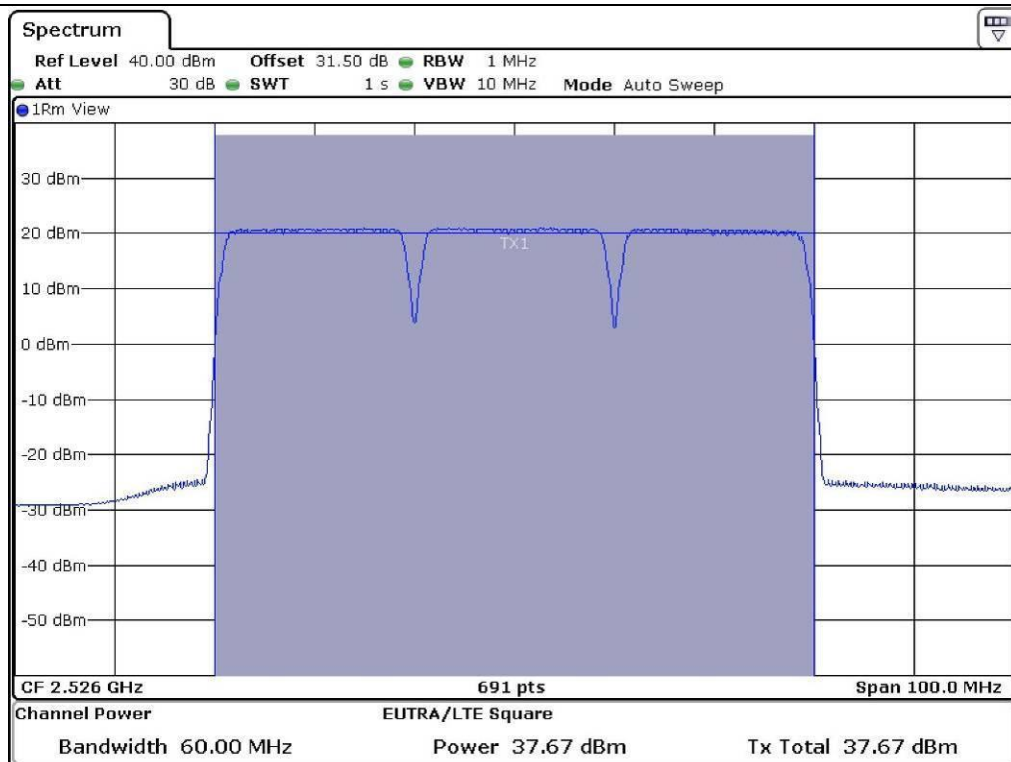


64 QAM – Low Channel

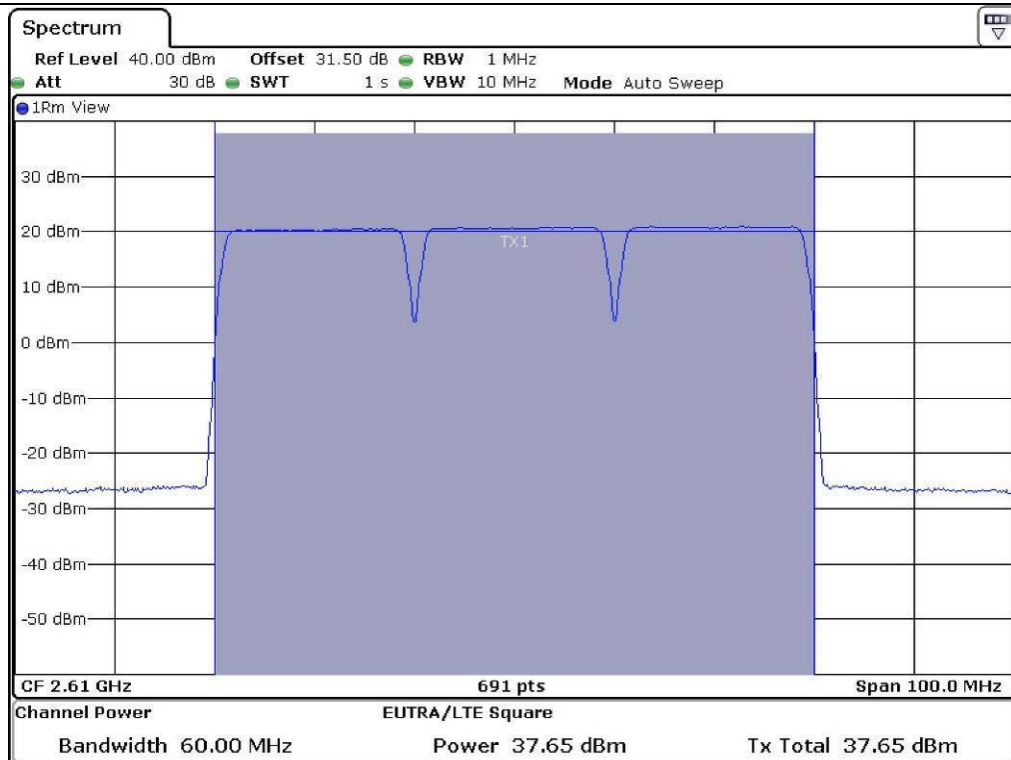


64 QAM – Middle Channel

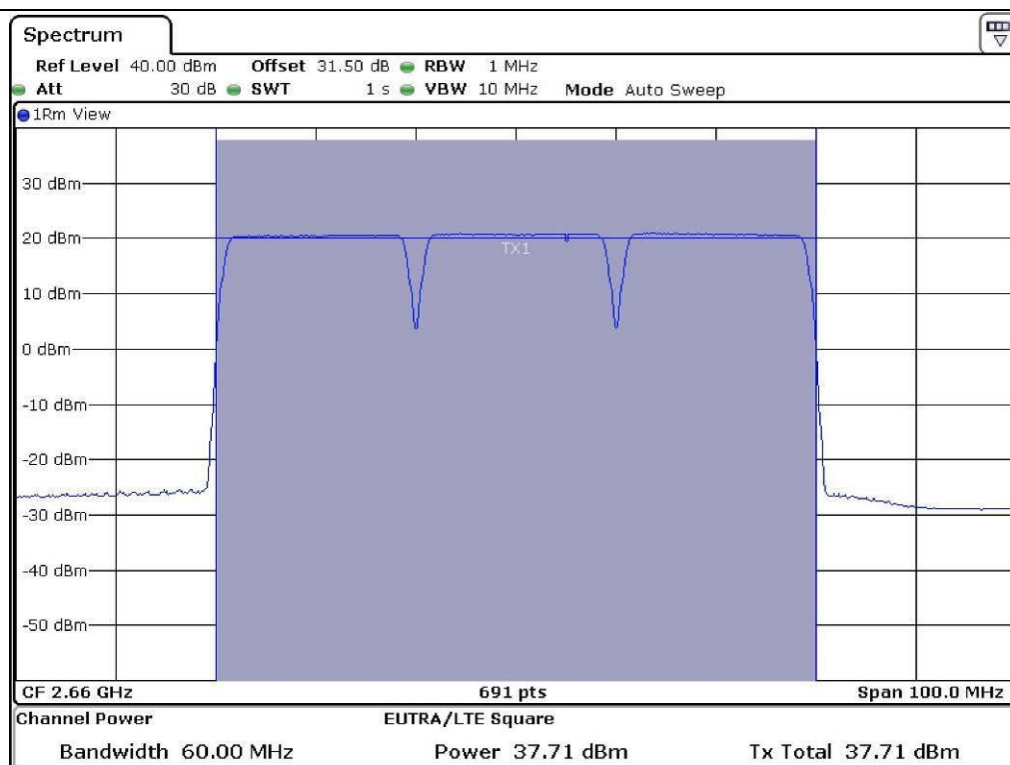


64 QAM – High Channel

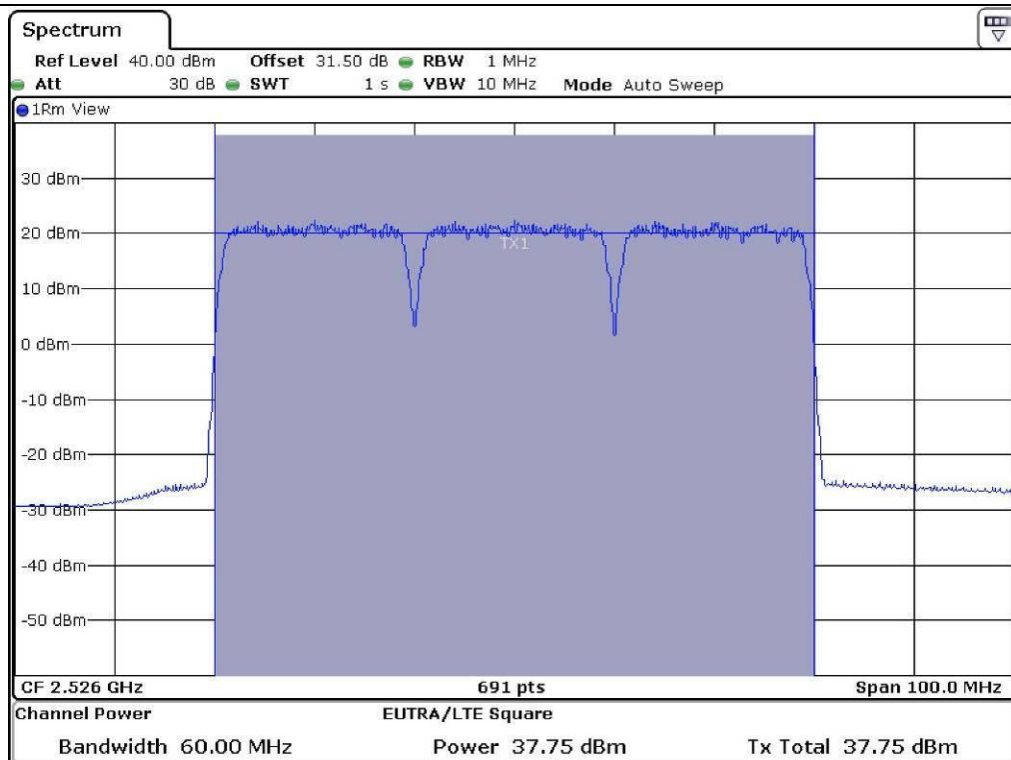

QPSK – Low Channel

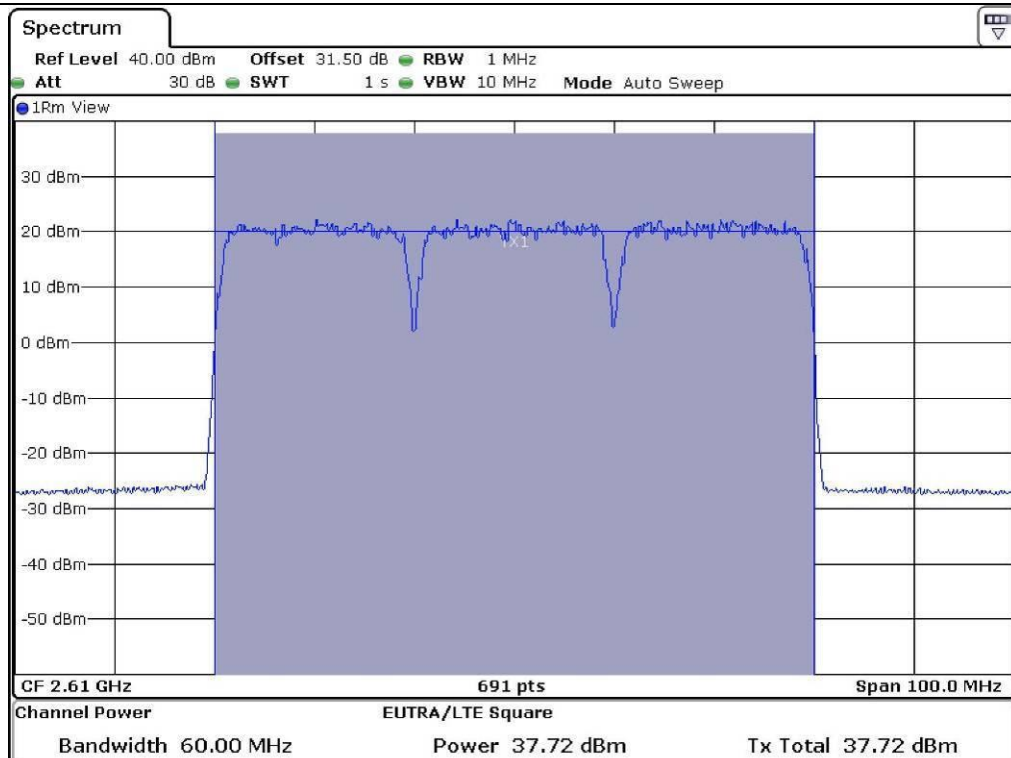

QPSK – Middle Channel

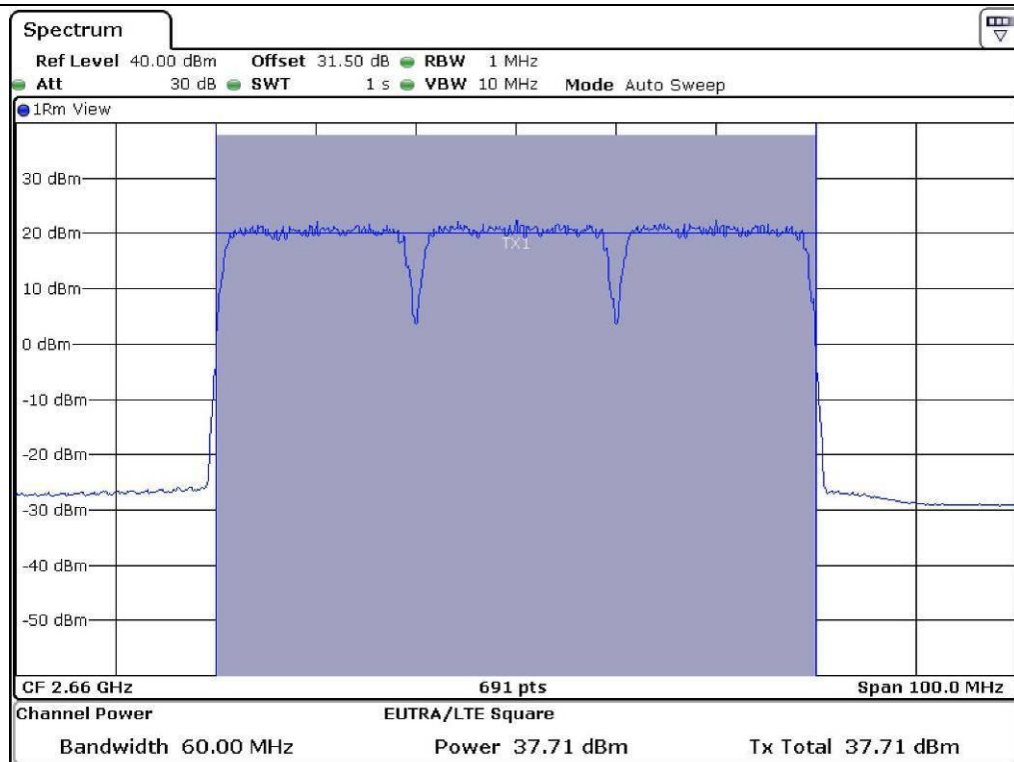

QPSK – High Channel

5.7 Test data for Multiple Transmit

5.7.1 Test Result (20 MHz/1 Carrier)

-. Test Date : July 31, 2014
-. Measurement Function : Channel Power
-. Detector Mode : RMS detector
-. Test Result : Pass

Modulation	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
16 QAM	Low	2 506	40.11	10.256 519	7 255
	Middle	2 590	40.01	10.023 052	
	High	2 680	39.99	9.977 001	
64 QAM	Low	2 506	39.96	9.908 319	
	Middle	2 590	40.01	10.023 052	
	High	2 680	39.98	9.954 054	
QPSK	Low	2 506	40.02	10.046 158	
	Middle	2 590	40.02	10.046 158	
	High	2 680	40.11	10.256 519	



Tested by: Tae-Ho, Kim / Project Engineer

5.7.2 Test Result (20 MHz/2 Carrier)

-. Test Date : July 31, 2014
-. Measurement Function : Channel Power
-. Detector Mode : RMS detector
-. Test Result : Pass

Modulation	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
16 QAM	Low	2 516	40.78	11.967 405	14 511
	Middle	2 600	40.71	11.776 060	
	High	2 670	40.78	11.967 405	
64 QAM	Low	2 516	40.72	11.803 206	
	Middle	2 600	40.79	11.994 993	
	High	2 670	40.84	12.133 889	
QPSK	Low	2 516	40.76	11.912 420	
	Middle	2 600	40.86	12.189 896	
	High	2 670	40.89	12.274 392	



Tested by: Tae-Ho, Kim / Project Engineer

5.7.3 Test Result (20 MHz/3 Carrier)

-. Test Date : July 31, 2014
-. Measurement Function : Channel Power
-. Detector Mode : RMS detector
-. Test Result : Pass

Modulation	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
16 QAM	Low	2 526	40.78	11.967 405	21 767
	Middle	2 610	40.80	12.022 644	
	High	2 660	40.78	11.967 405	
64 QAM	Low	2 526	40.70	11.748 976	
	Middle	2 610	40.67	11.668 096	
	High	2 660	40.70	11.748 976	
QPSK	Low	2 526	40.77	11.939 881	
	Middle	2 610	40.77	11.939 881	
	High	2 660	40.74	11.857 687	



Tested by: Tae-Ho, Kim / Project Engineer


6. OCCUPIED BANDWIDTH

6.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

6.2 Test set-up

The test was performed at three frequencies (low, middle, and high channels) at each band using all applicable modulation. For the testing, the RBW was set to 1 % to 3 % of the 26 dB bandwidth and 99 % Occupied Bandwidth. The VBW is set to 3 times the RBW and sweep time is coupled.



6.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	R/S	FSV30 Signal Analyzer	101372	Apr. 28, 2014 (1Y)
■ -	67-30-43	Aeroflex/Weinschel, Inc.,	Attenuator	CA5760	Nov. 05, 2013 (1Y)
■ -	WA49-20-43	Weinschel Associates	Attenuator	A192	Apr. 04, 2014 (1Y)
■ -	DH-60	Dea Kwang Elec.	Slidacs	N/A	Sep. 03, 2013 (1Y)

All test equipment used is calibrated on a regular basis.

6.4 Test data for Port 0

6.4.1 Test Result (20 MHz/1 Carrier)

-. Test Date : July 31, 2014


-. Test Result : Pass

Modulation	Channel	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
16 QAM	Low	19.500	18.000
	Middle	19.500	18.100
	High	19.500	18.100
64 QAM	Low	19.600	18.000
	Middle	19.600	18.100
	High	19.600	18.000
QPSK	Low	19.600	18.100
	Middle	19.600	18.100
	High	19.500	18.100


Remark: According to above result, the carrier frequency shall be within the frequency block edges.




Tested by: Tae-Ho, Kim / Project Engineer

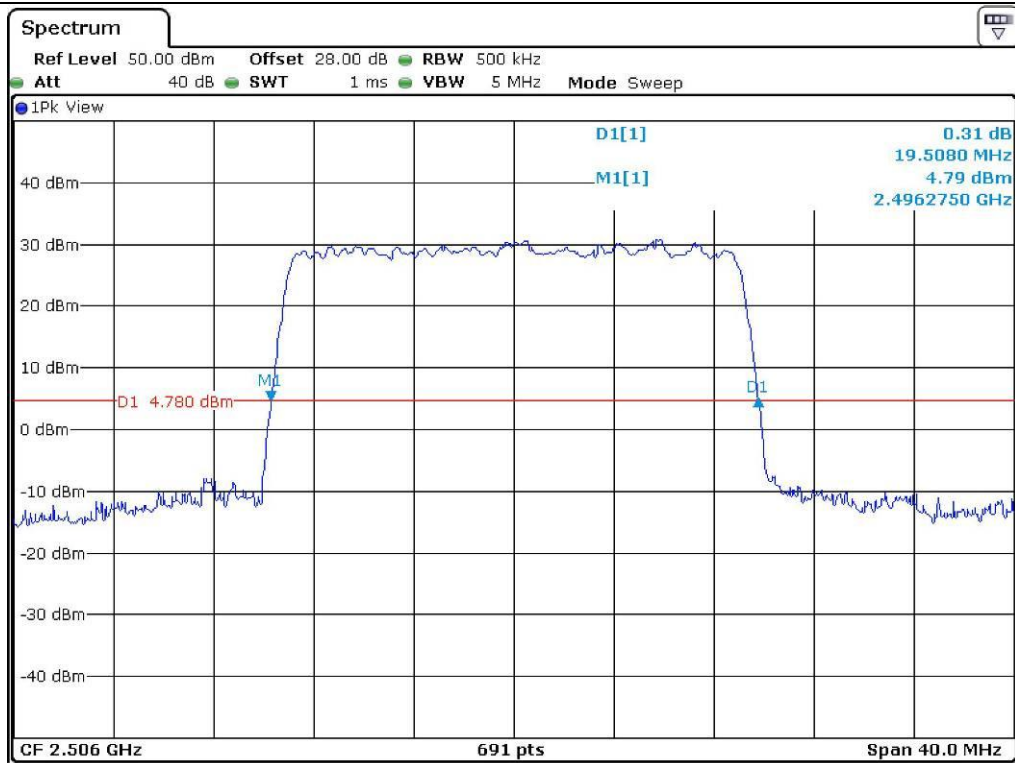


16 QAM – 26 dB Bandwidth (Low Channel)

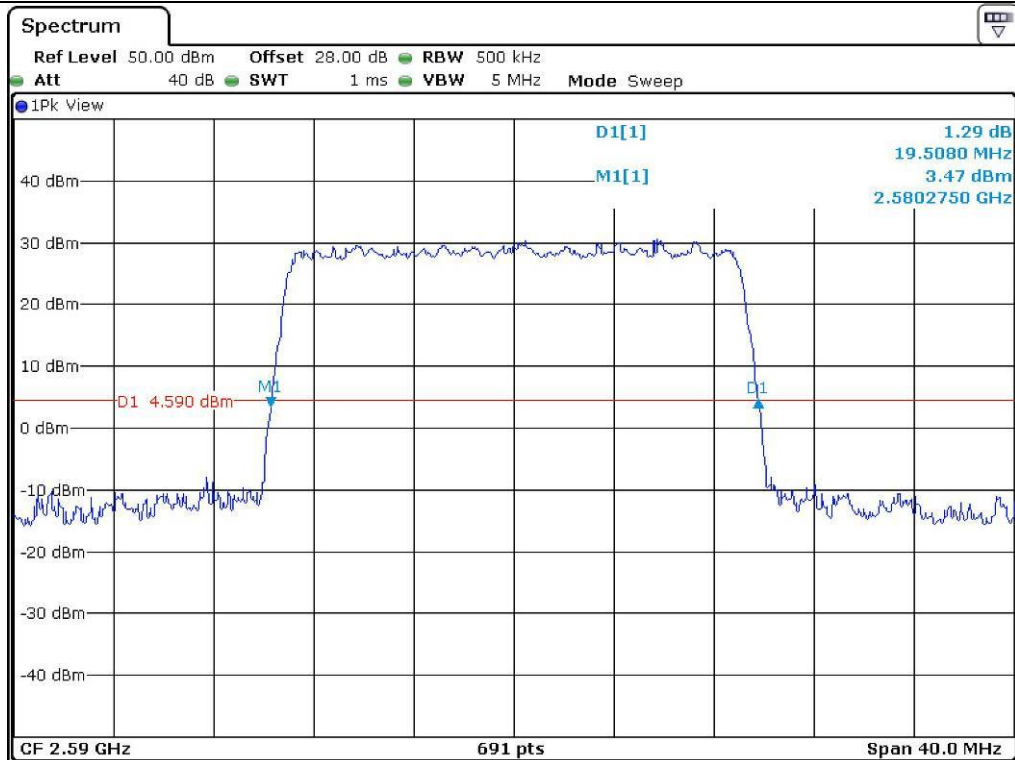


16 QAM – 26 dB Bandwidth (Middle Channel)

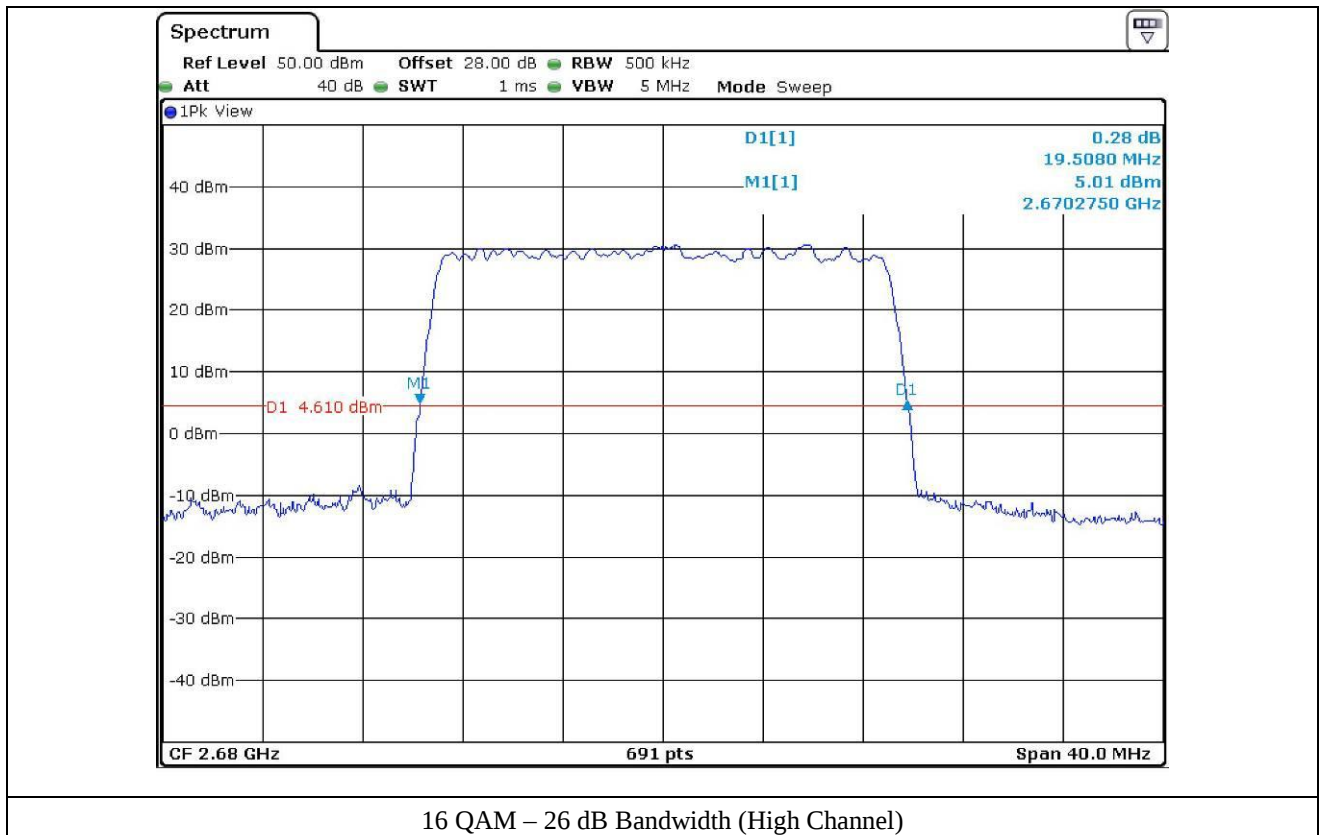


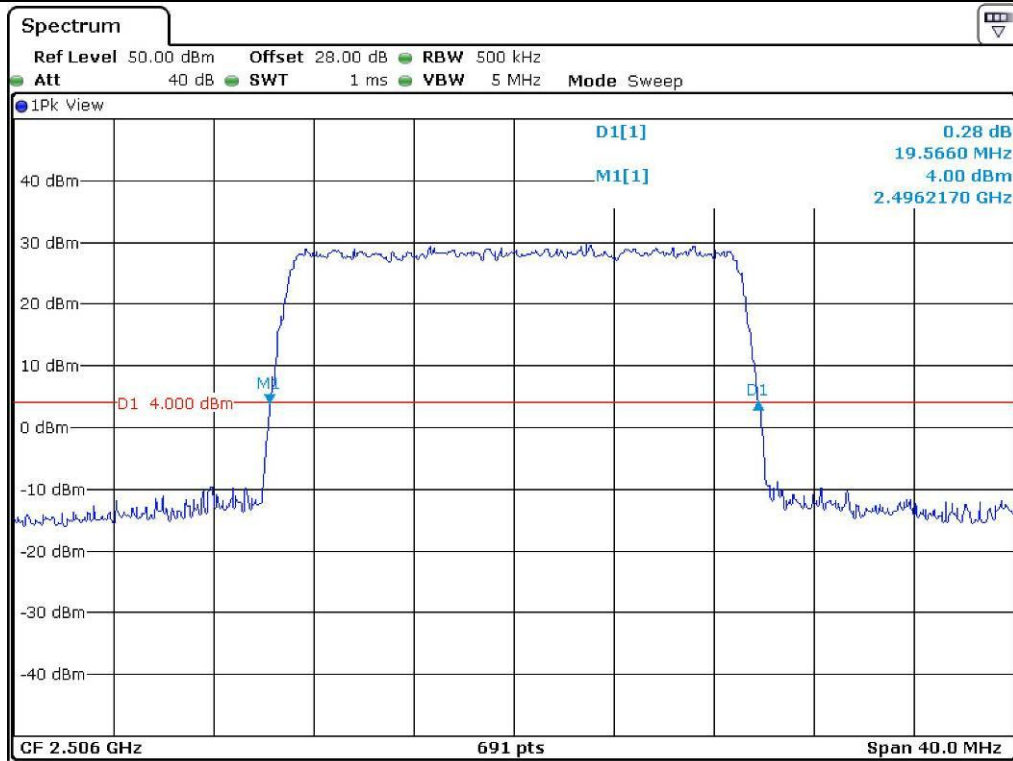


64 QAM – 26 dB Bandwidth (Low Channel)

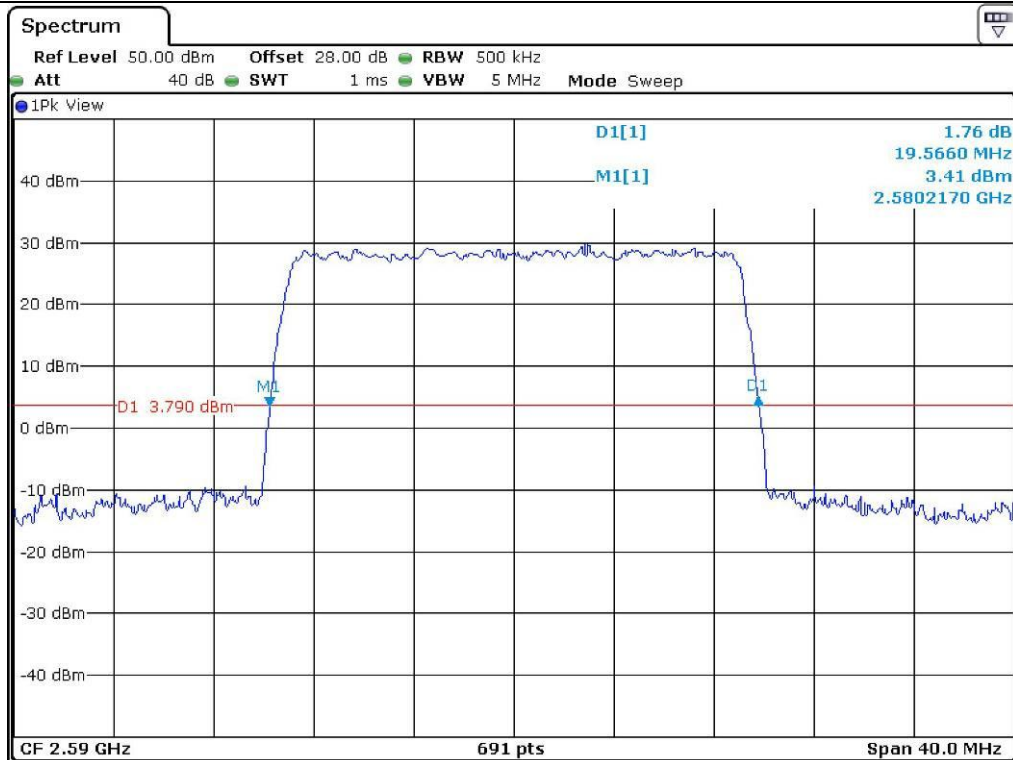


64 QAM – 26 dB Bandwidth (Middle Channel)

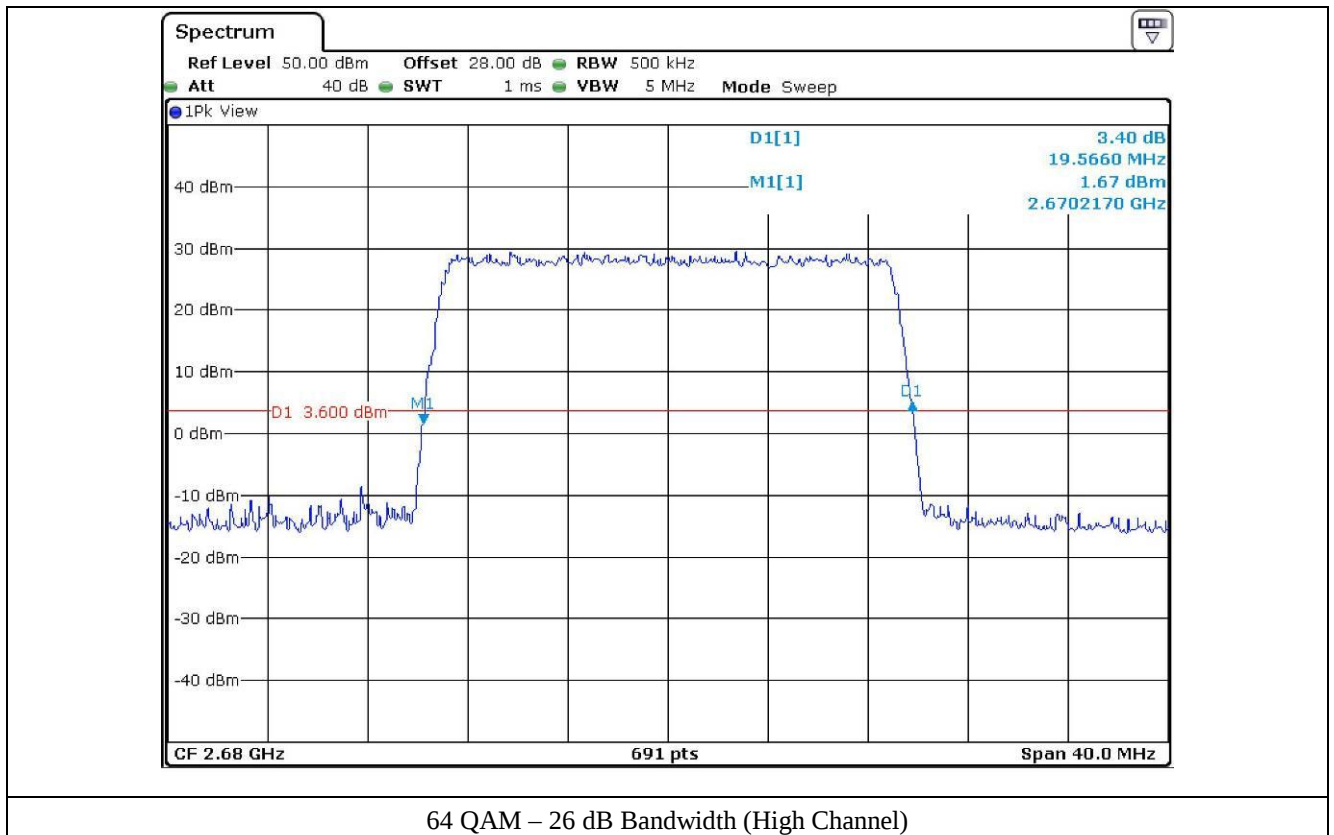


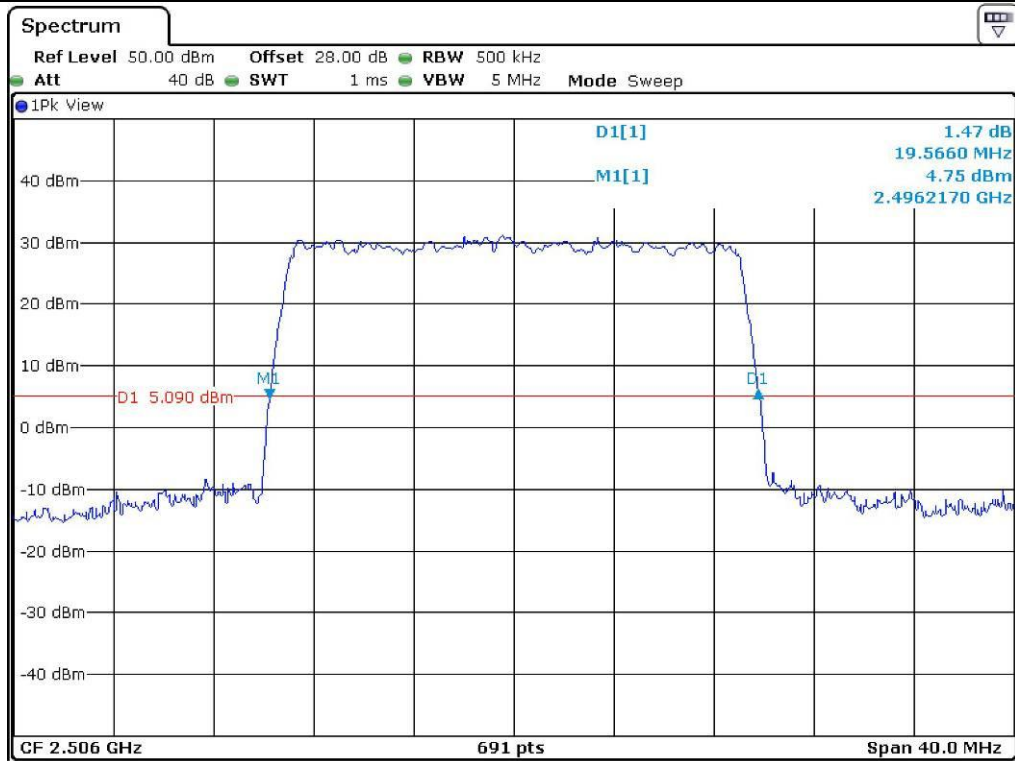


QPSK – 26 dB Bandwidth (Low Channel)

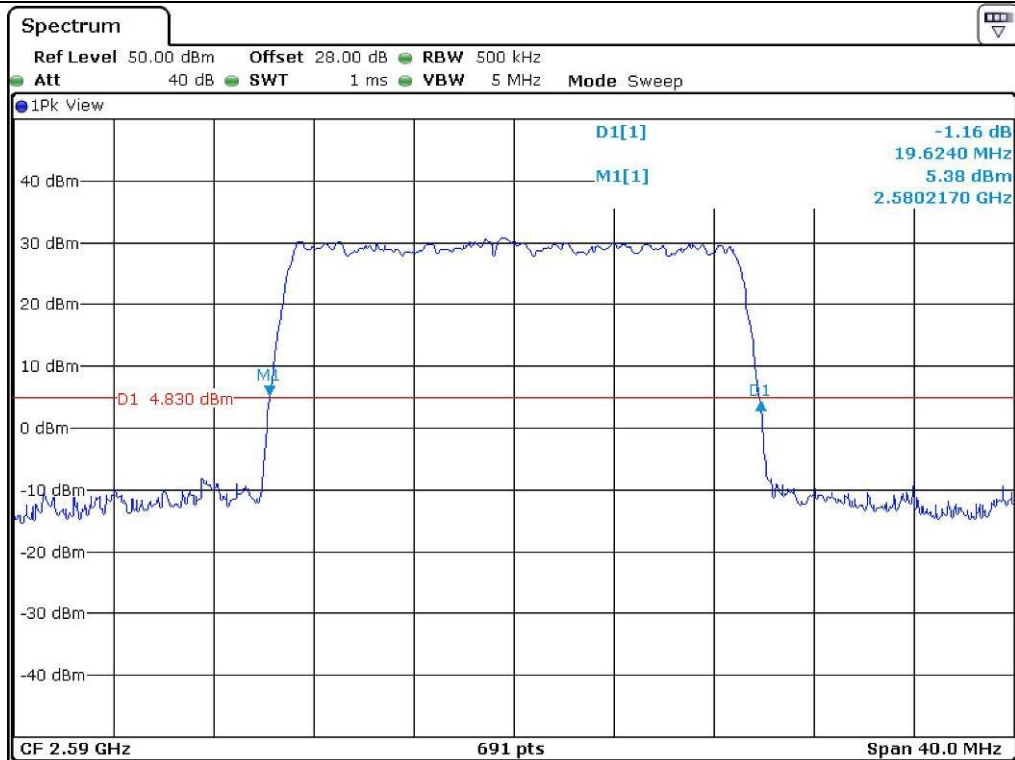


QPSK – 26 dB Bandwidth (Middle Channel)

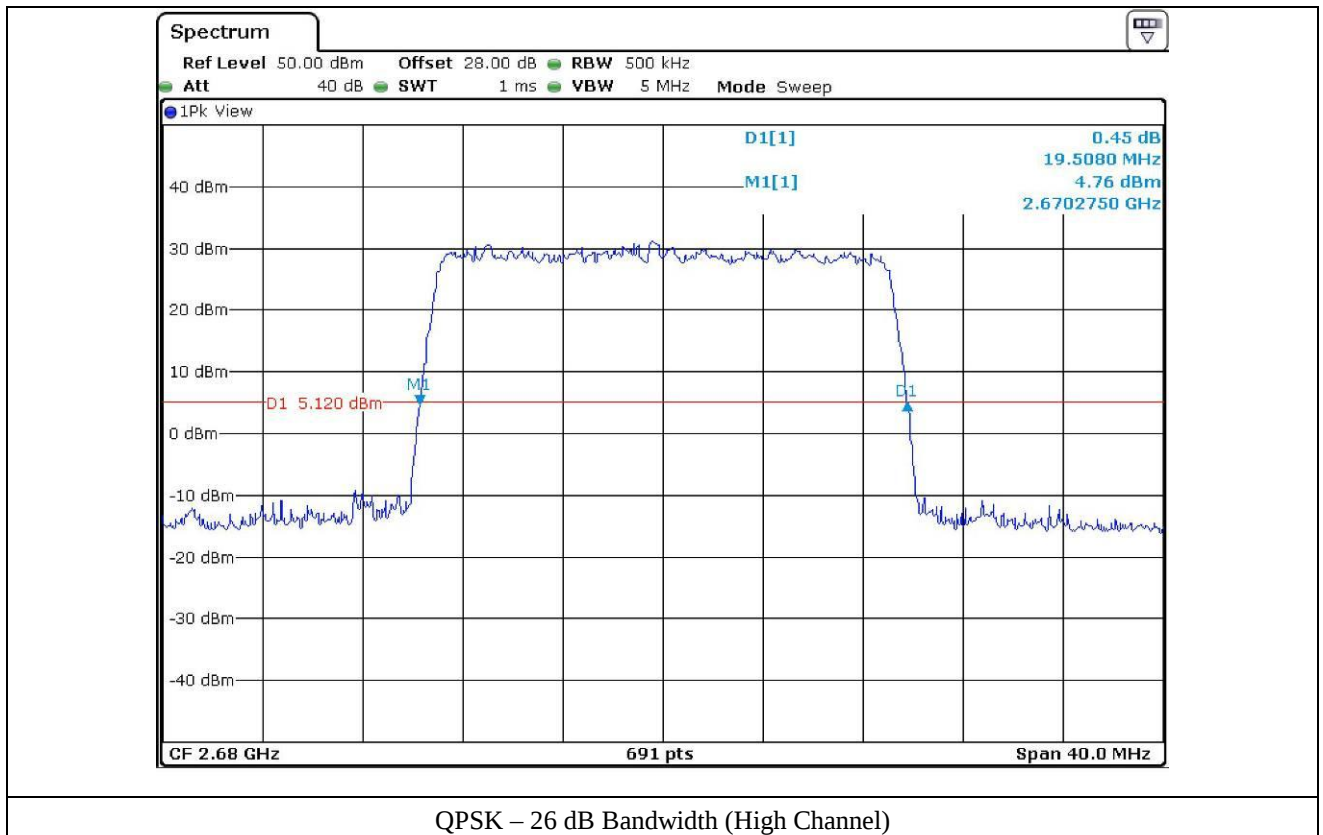


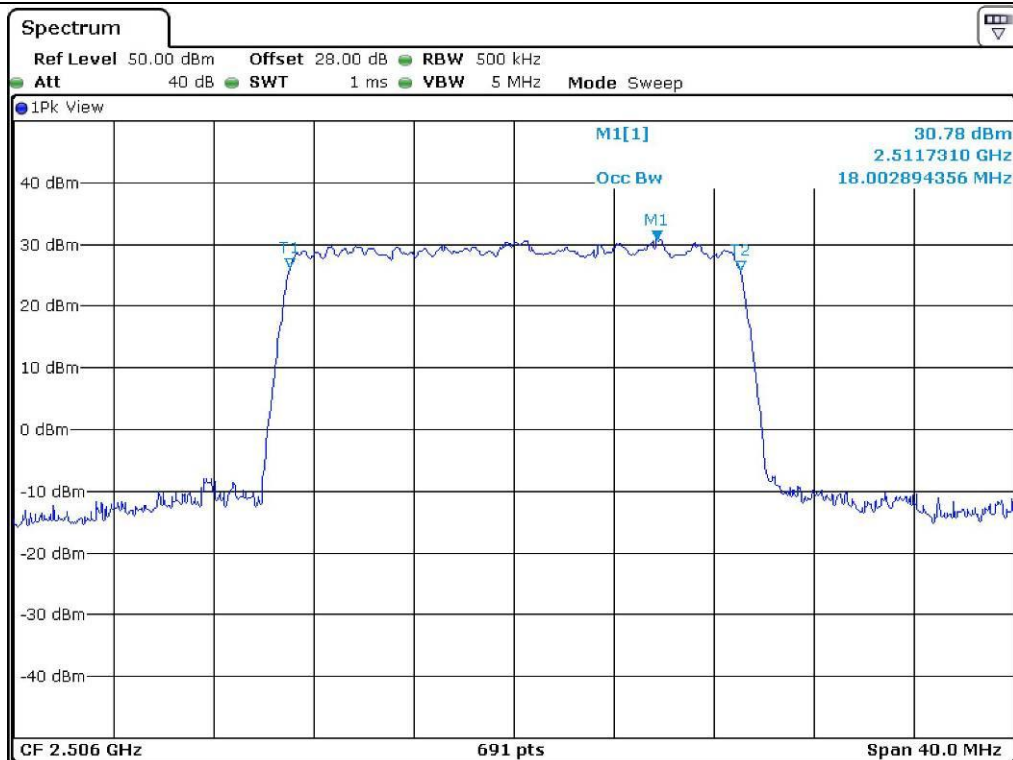


16 QAM – 99 % Occupied Bandwidth (Low Channel)

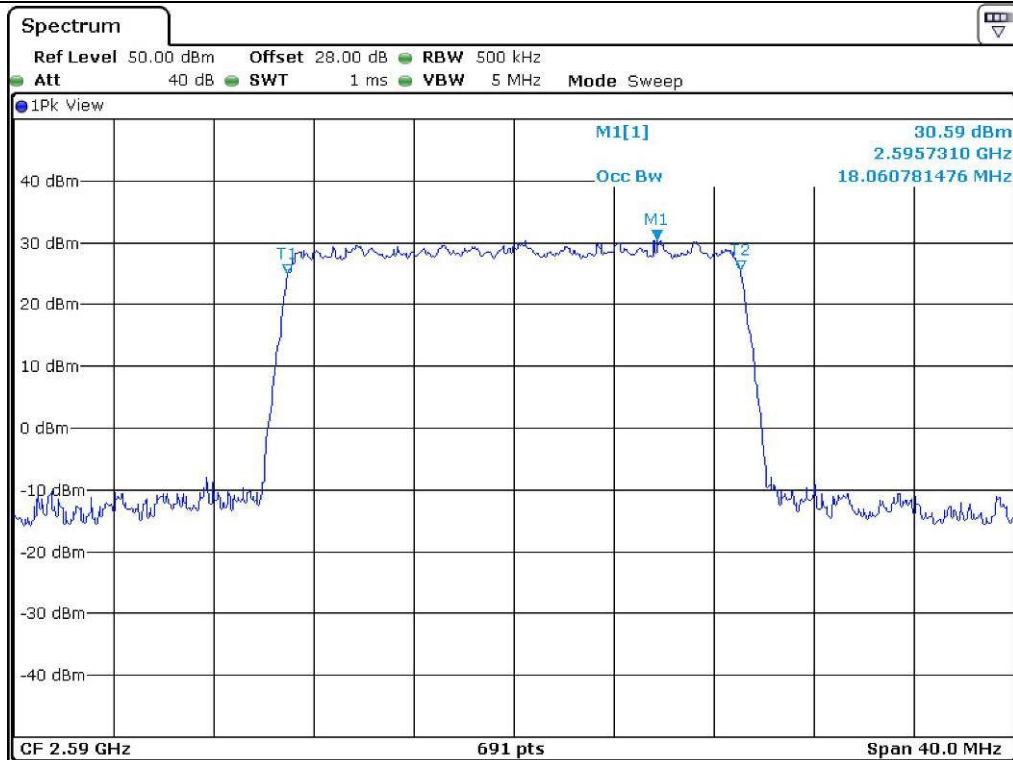


16 QAM – 99 % Occupied Bandwidth (Middle Channel)

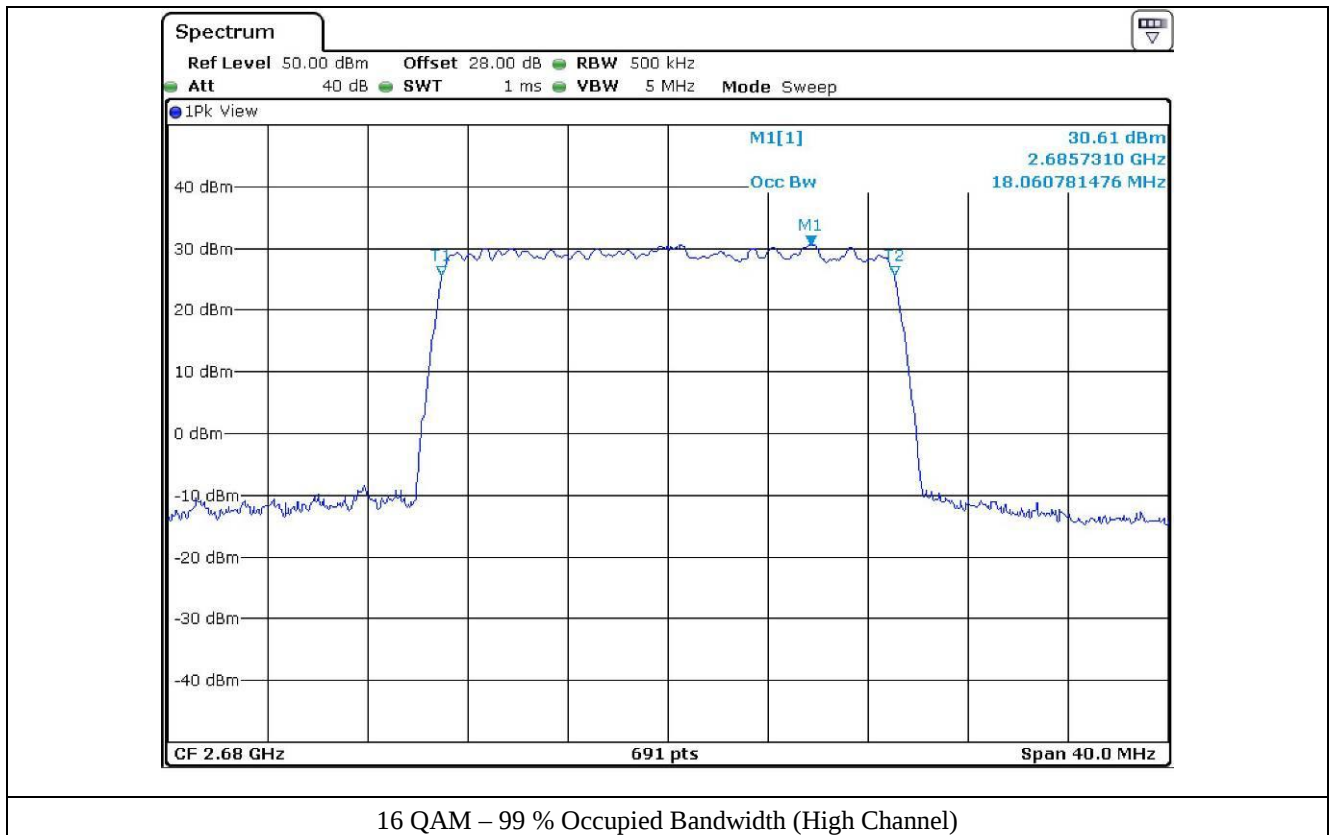


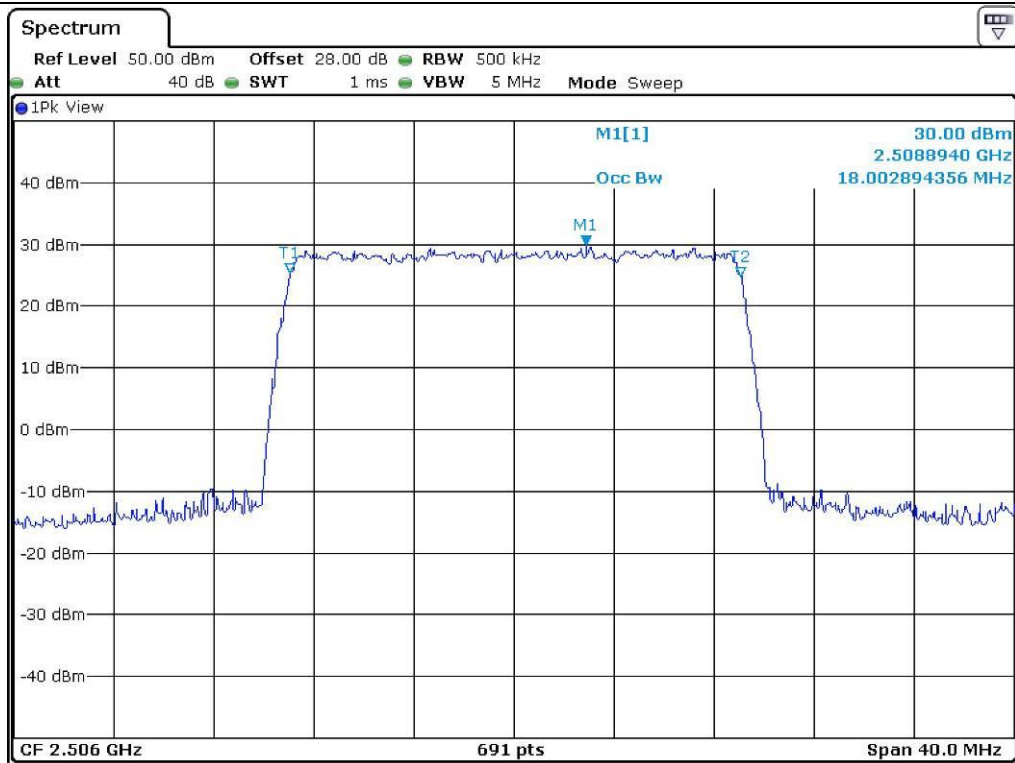


64 QAM – 99 % Occupied Bandwidth (Low Channel)

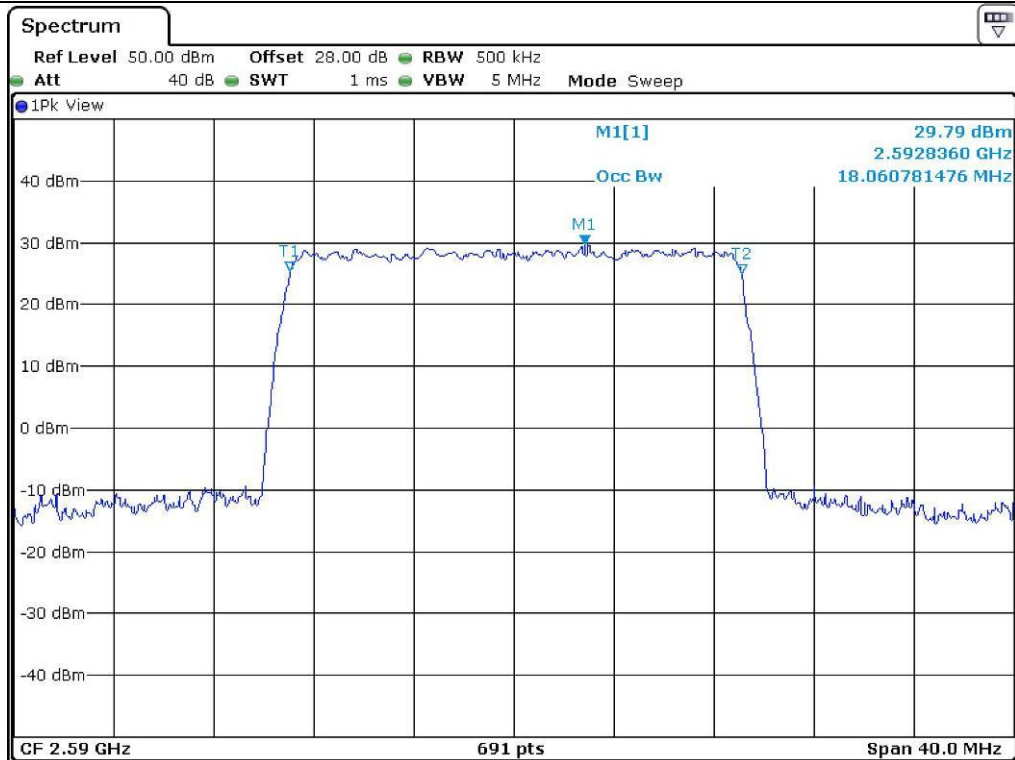


64 QAM – 99 % Occupied Bandwidth (Middle Channel)

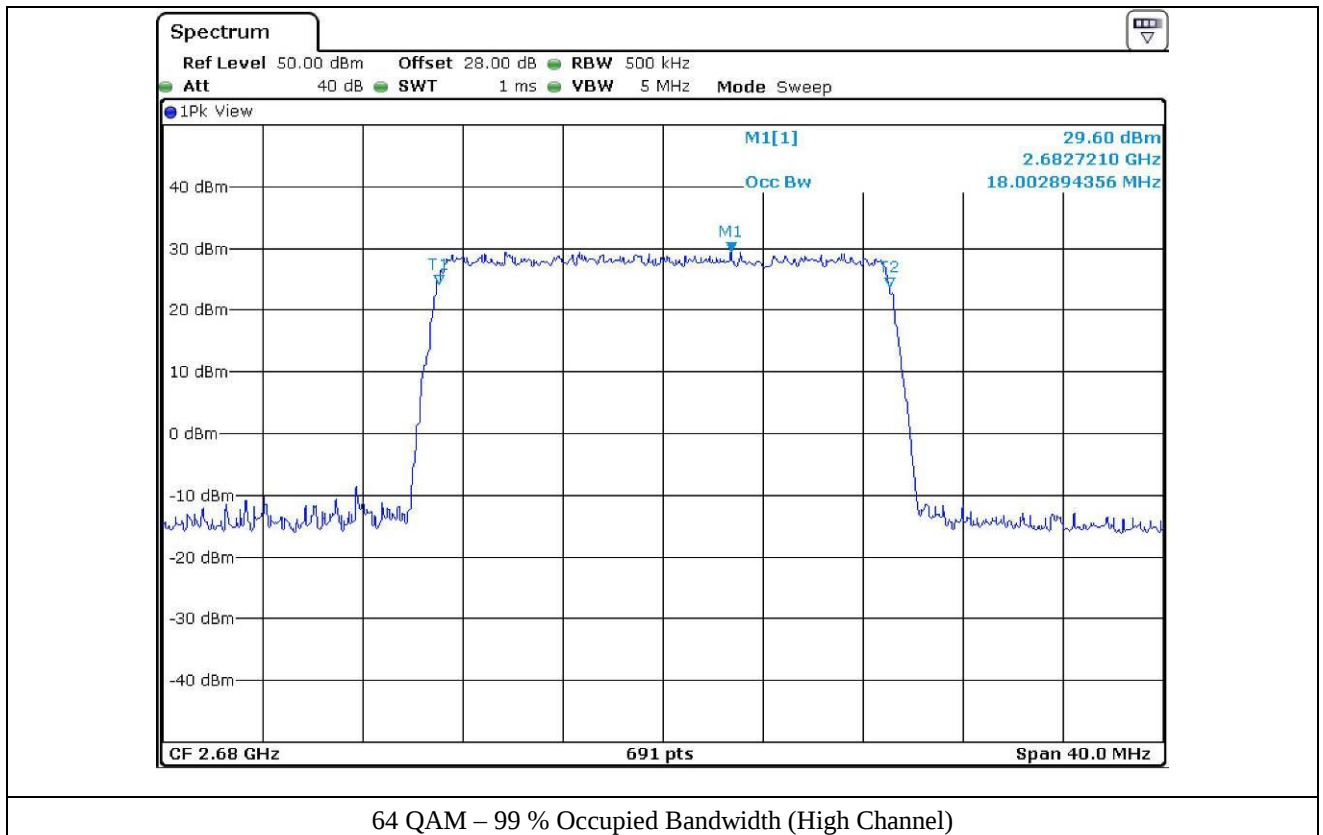


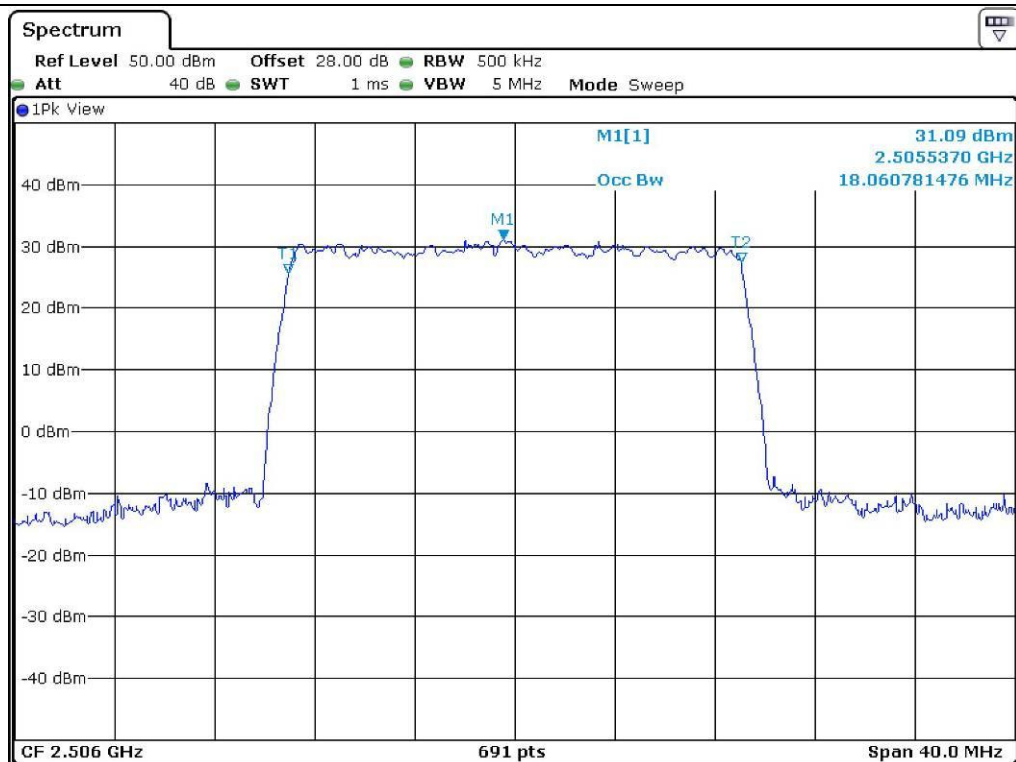

QPSK – 99 % Occupied Bandwidth (Low Channel)

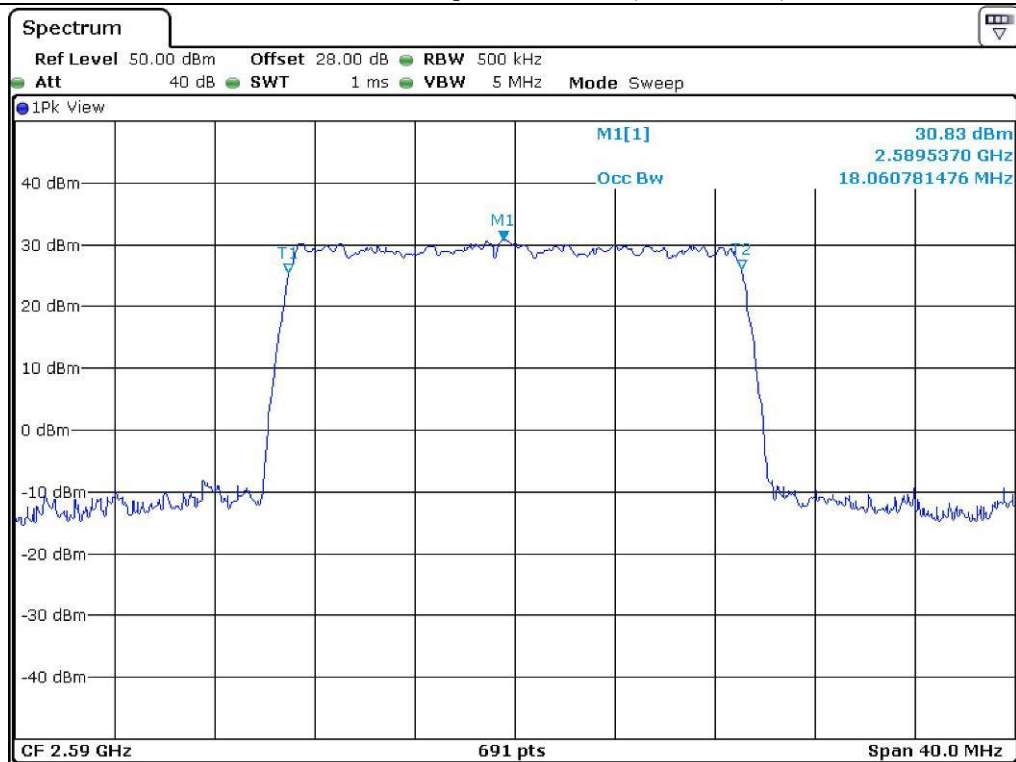

QPSK – 99 % Occupied Bandwidth (Middle Channel)

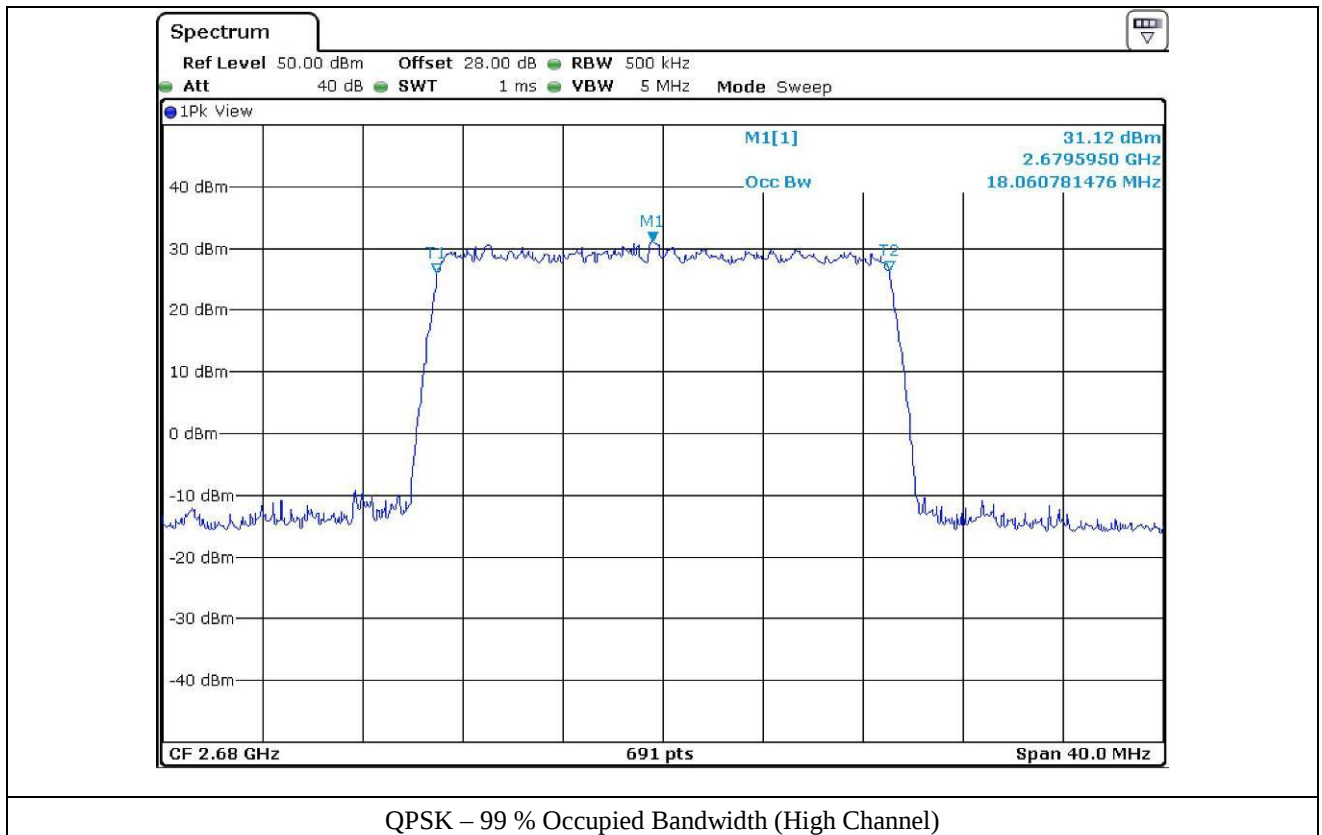

6.4.2 Test Result (20 MHz/2 Carrier)

-. Test Date : July 31, 2014


-. Test Result : Pass

Modulation	Channel	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
16 QAM	Low	40.300	38.000
	Middle	40.300	38.000
	High	40.400	38.100
64 QAM	Low	40.400	38.000
	Middle	40.500	38.000
	High	40.500	38.100
QPSK	Low	40.400	38.100
	Middle	40.400	38.100
	High	40.400	38.000


Remark: According to above result, the carrier frequency shall be within the frequency block edges.




Tested by: Tae-Ho, Kim / Project Engineer

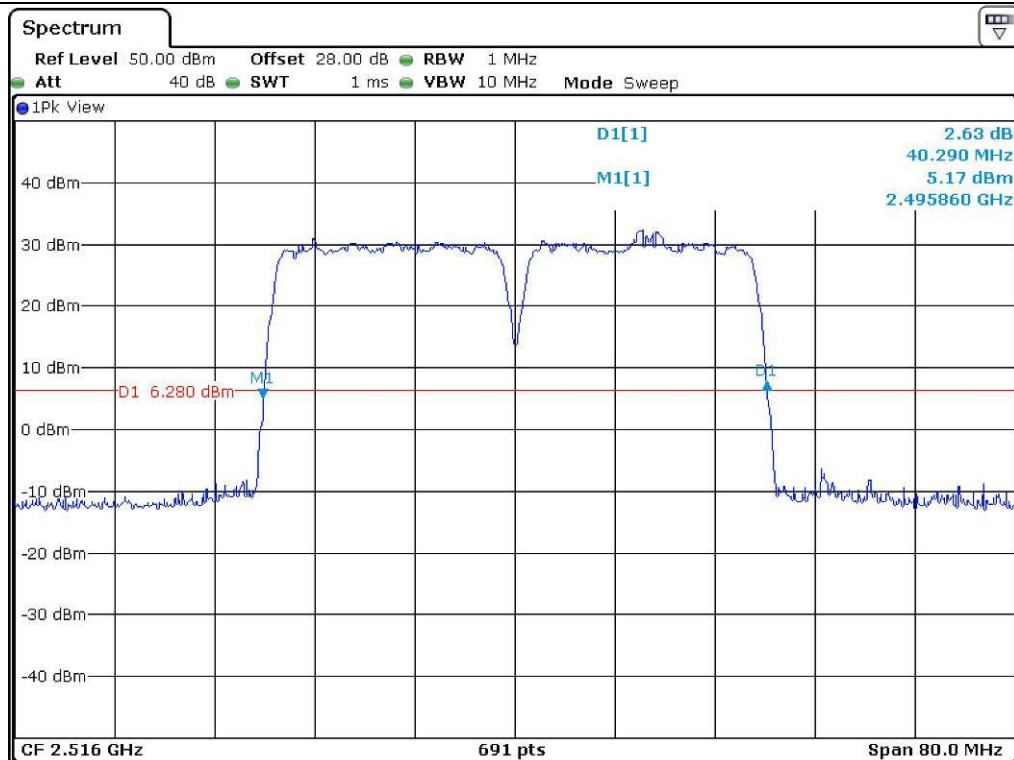


16 QAM – 26 dB Bandwidth (Low Channel)

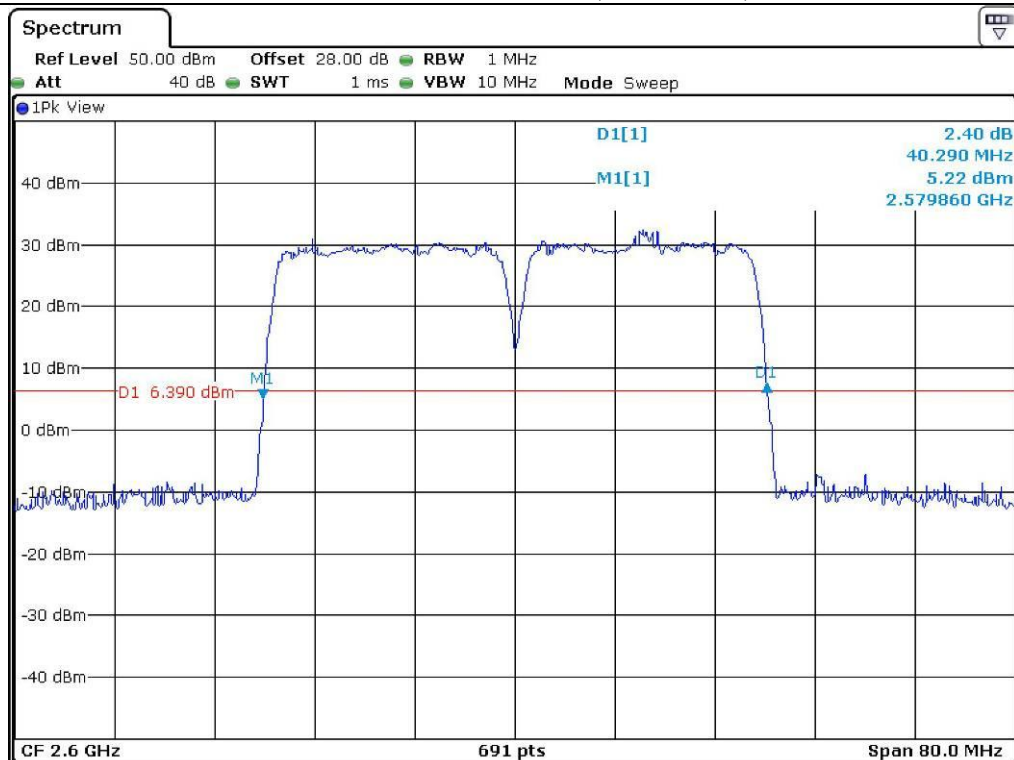


16 QAM – 26 dB Bandwidth (Middle Channel)

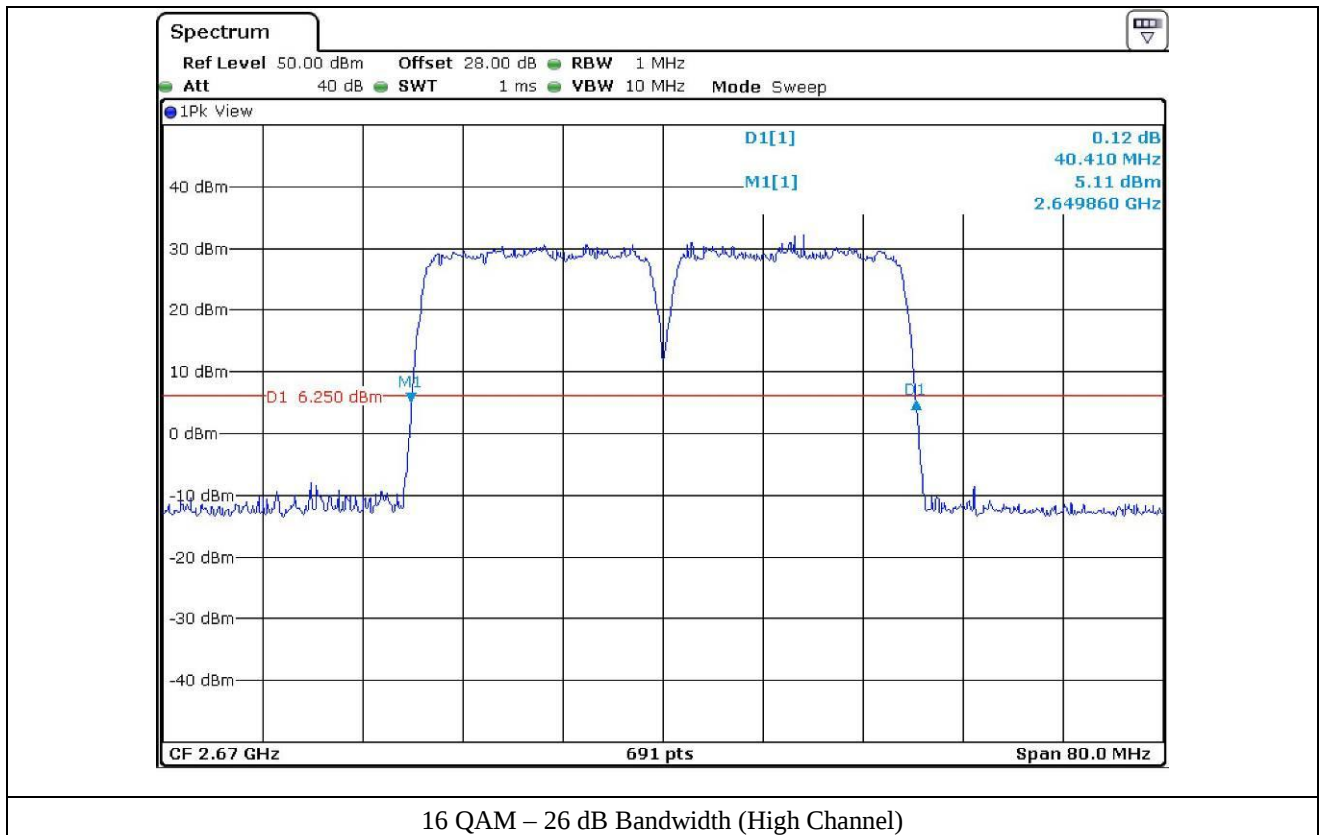


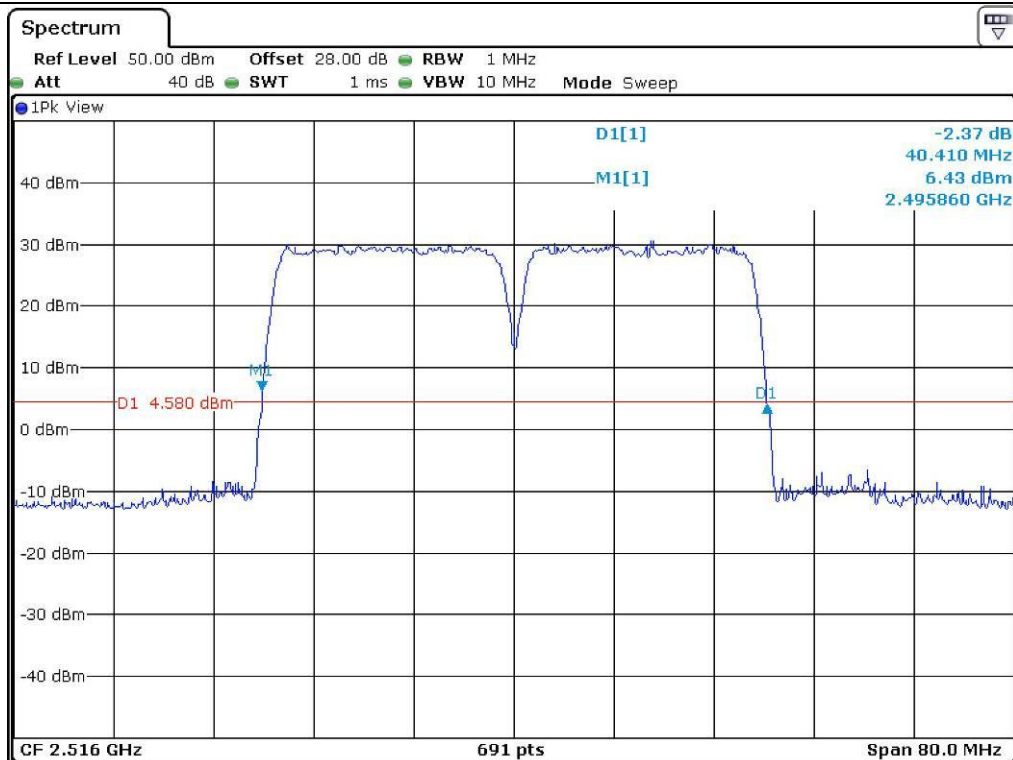


64 QAM – 26 dB Bandwidth (Low Channel)

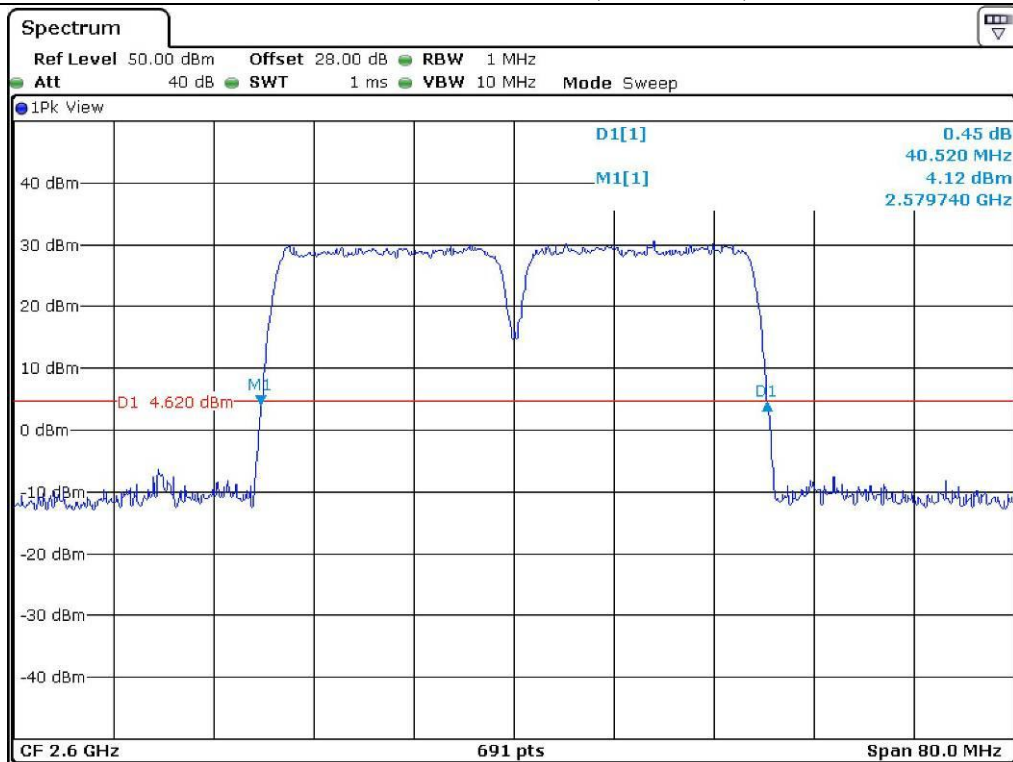


64 QAM – 26 dB Bandwidth (Middle Channel)

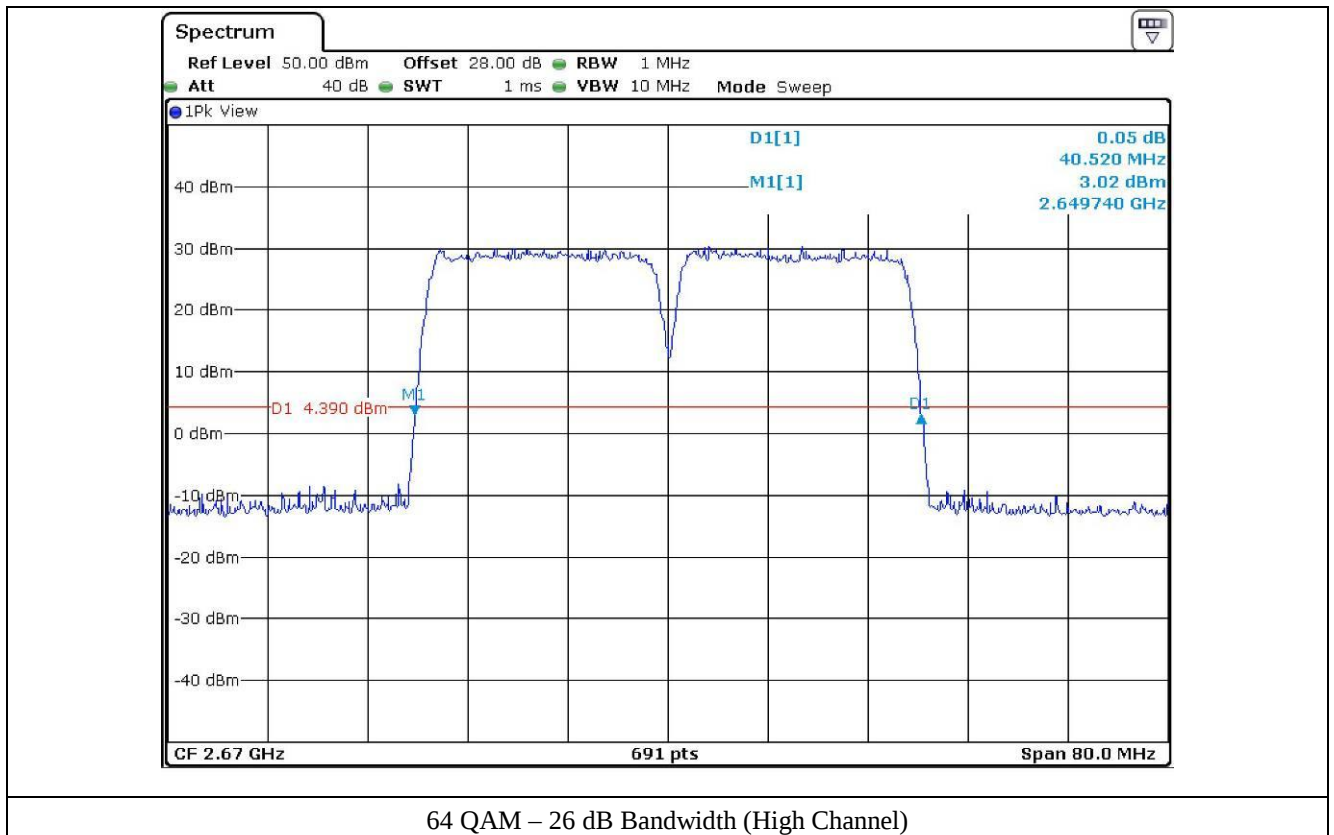


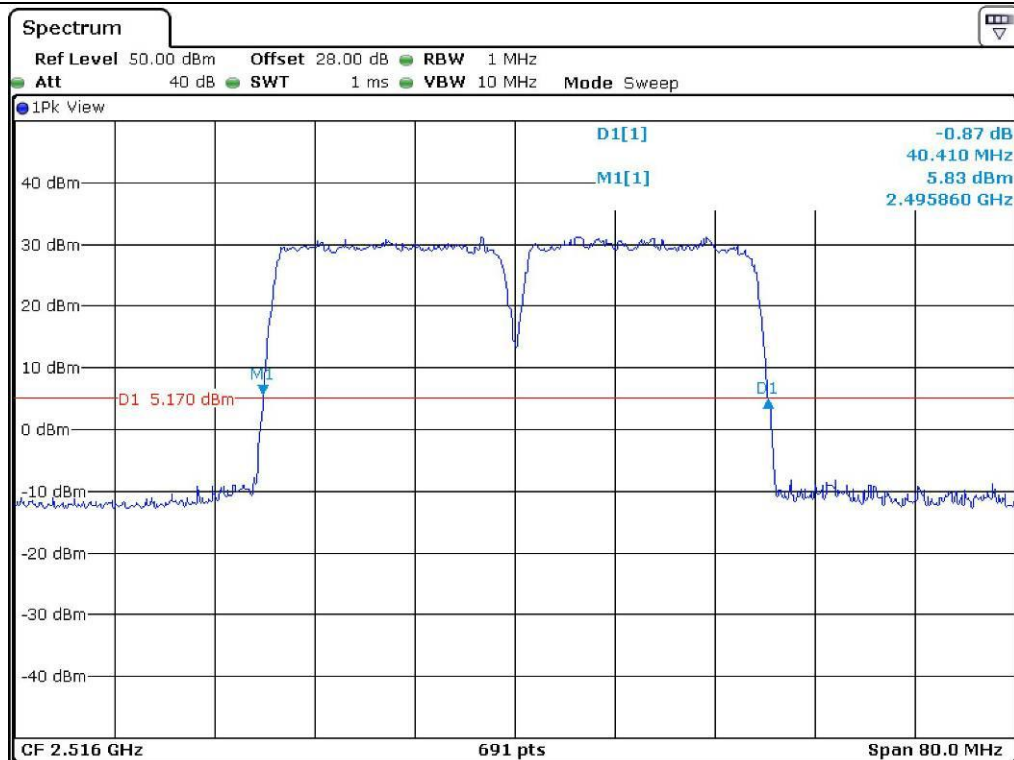


QPSK – 26 dB Bandwidth (Low Channel)

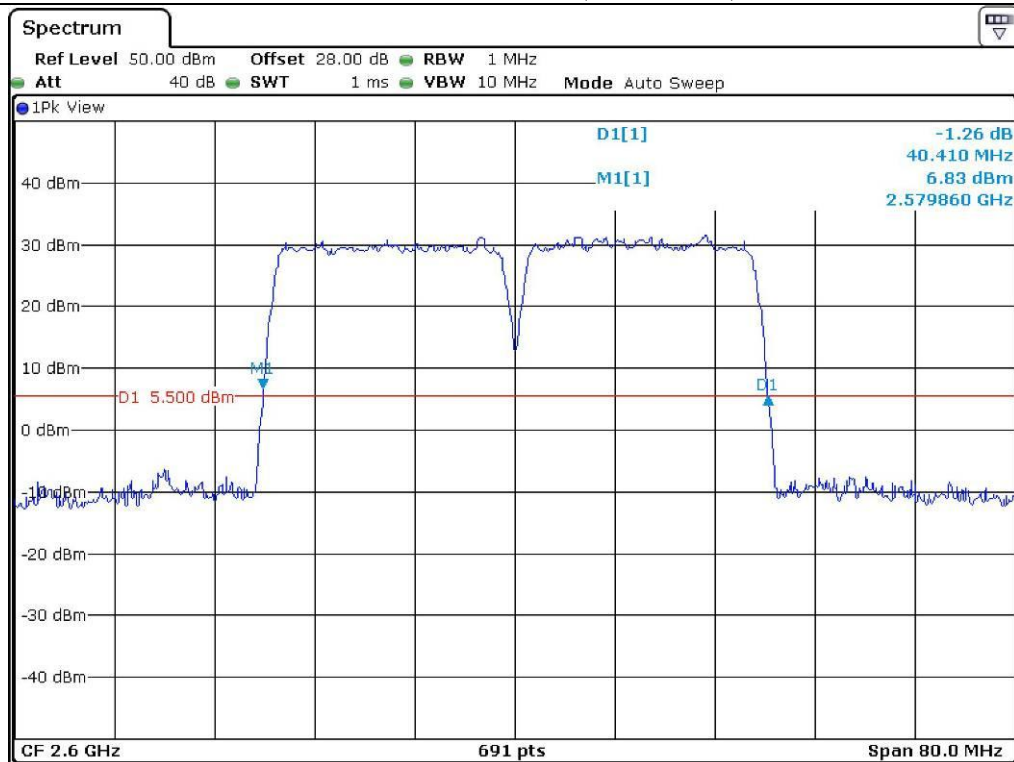


QPSK – 26 dB Bandwidth (Middle Channel)

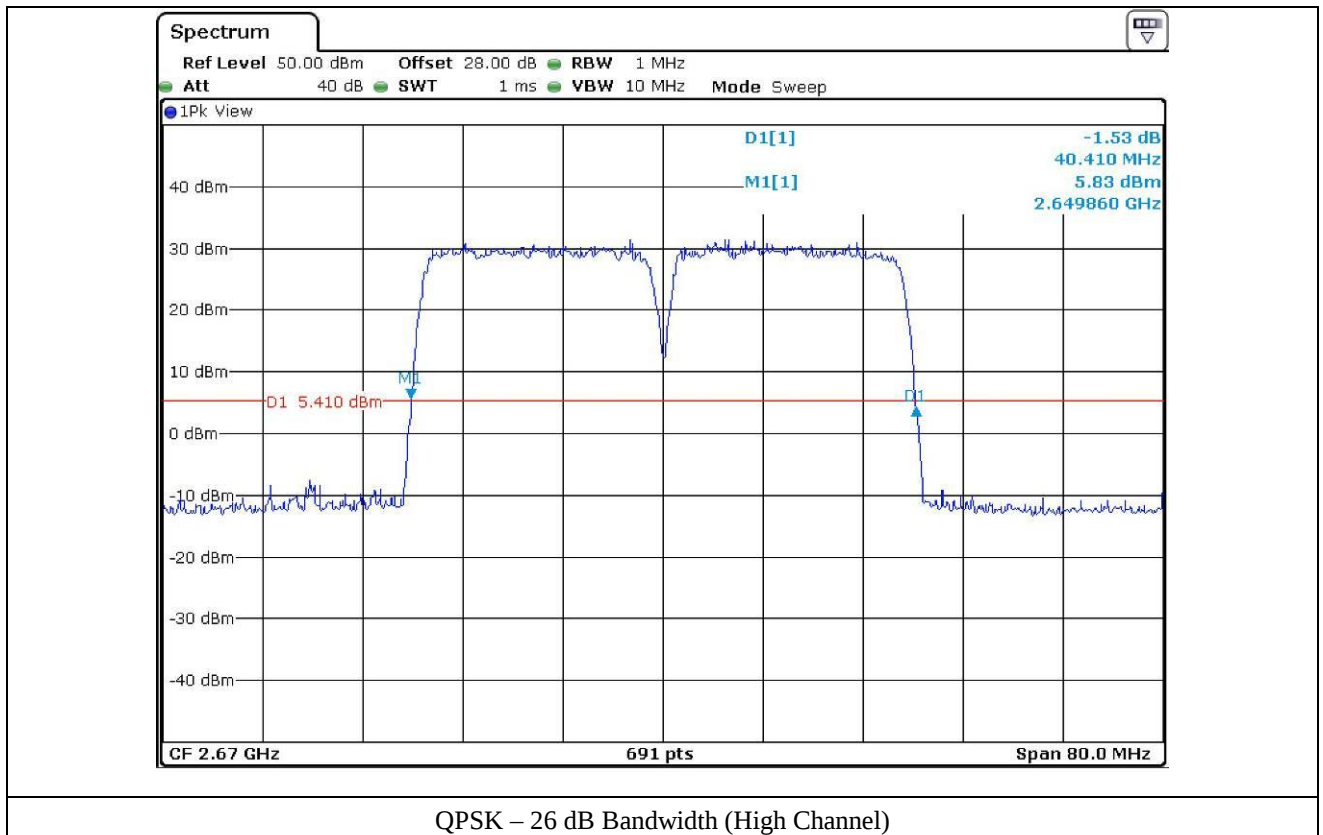


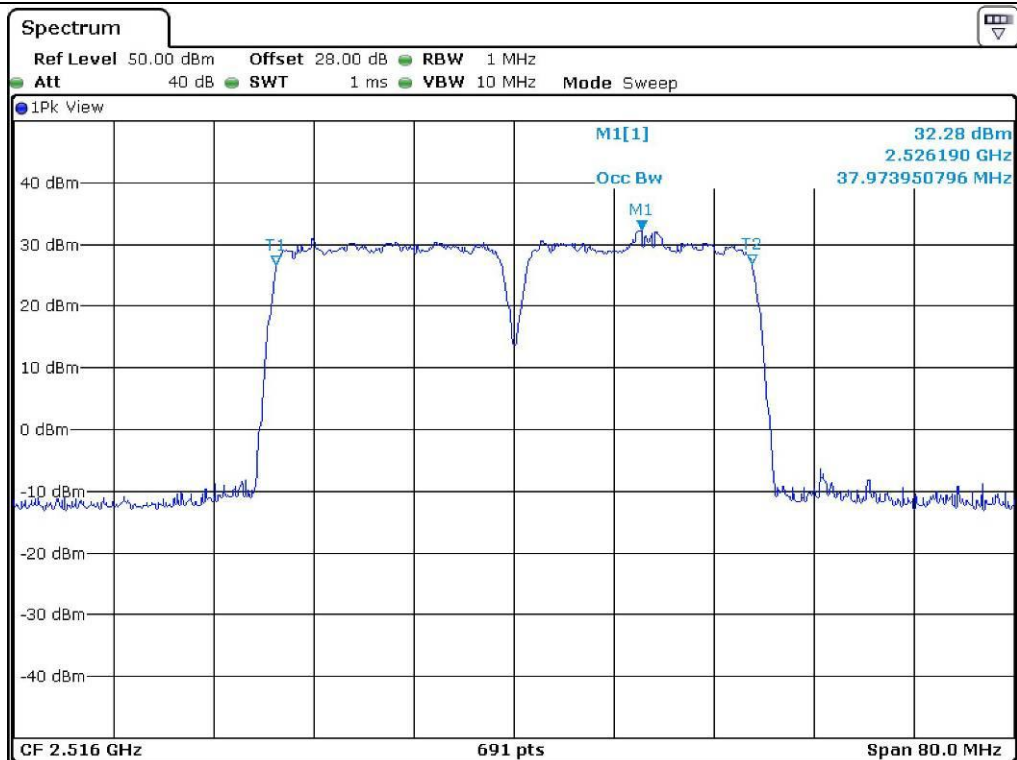


16 QAM – 99 % Occupied Bandwidth (Low Channel)

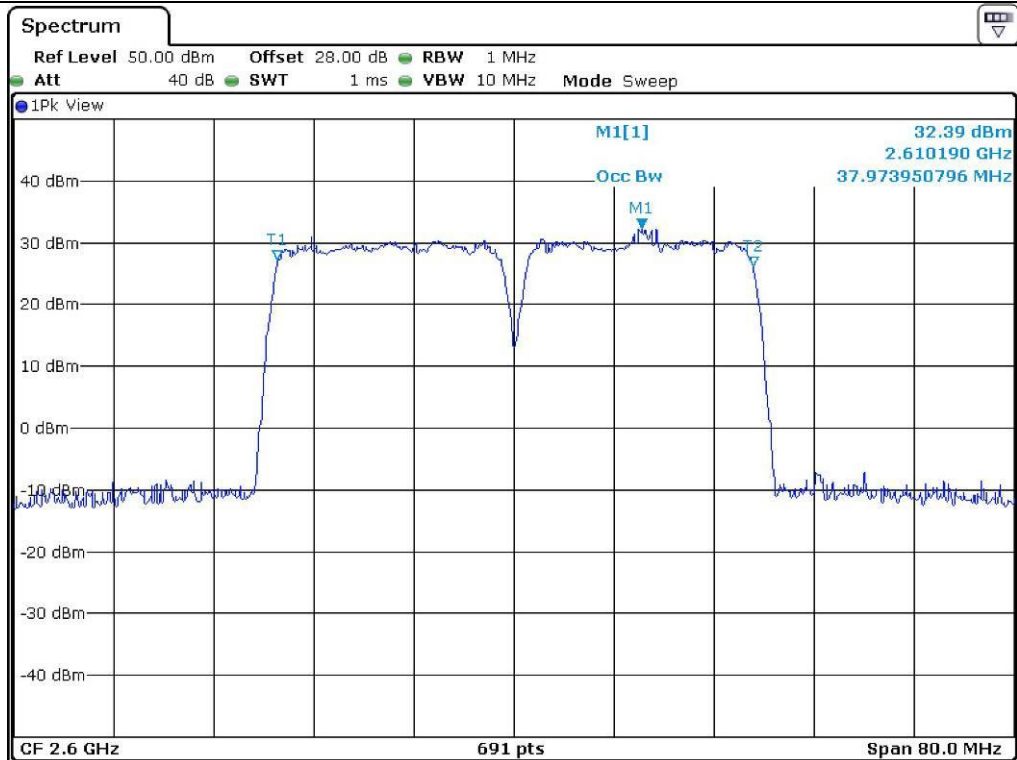


16 QAM – 99 % Occupied Bandwidth (Middle Channel)

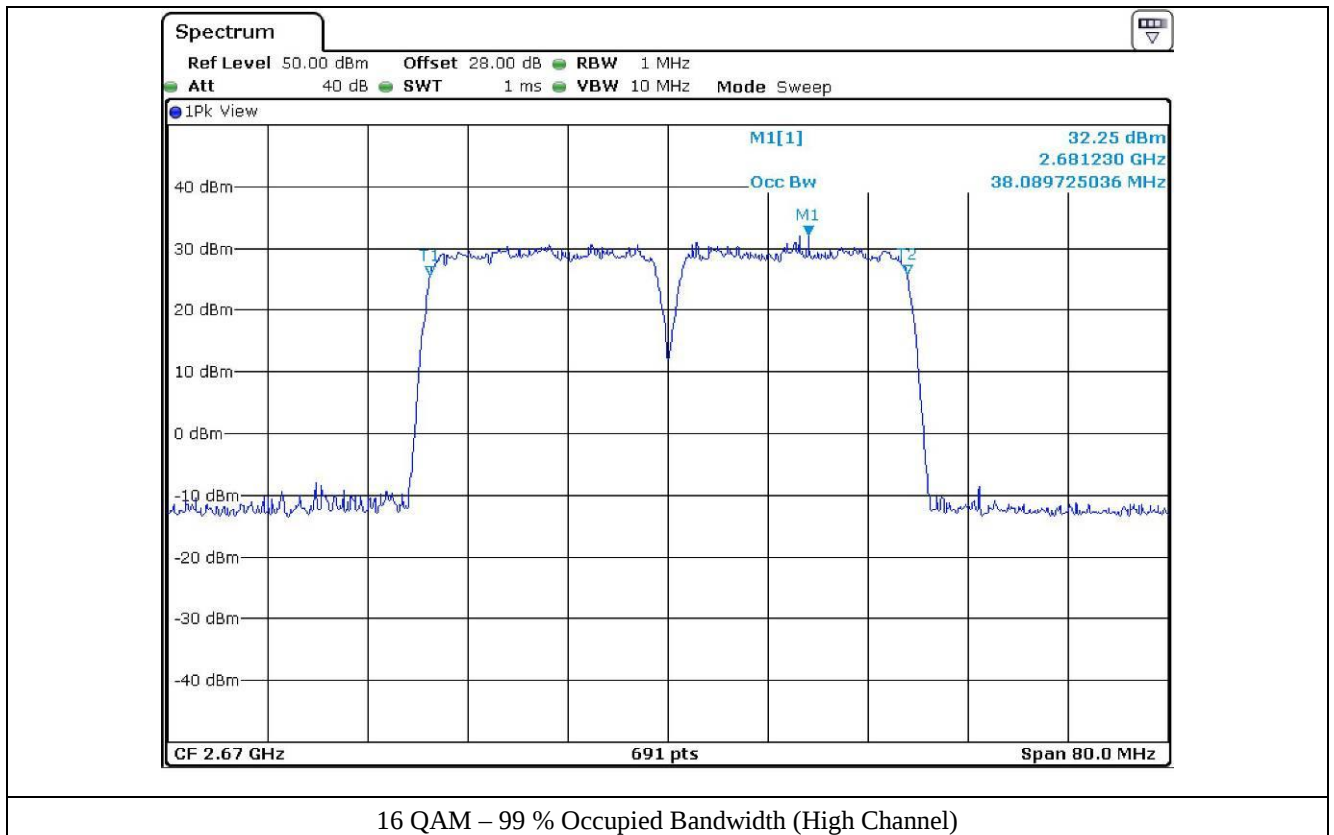


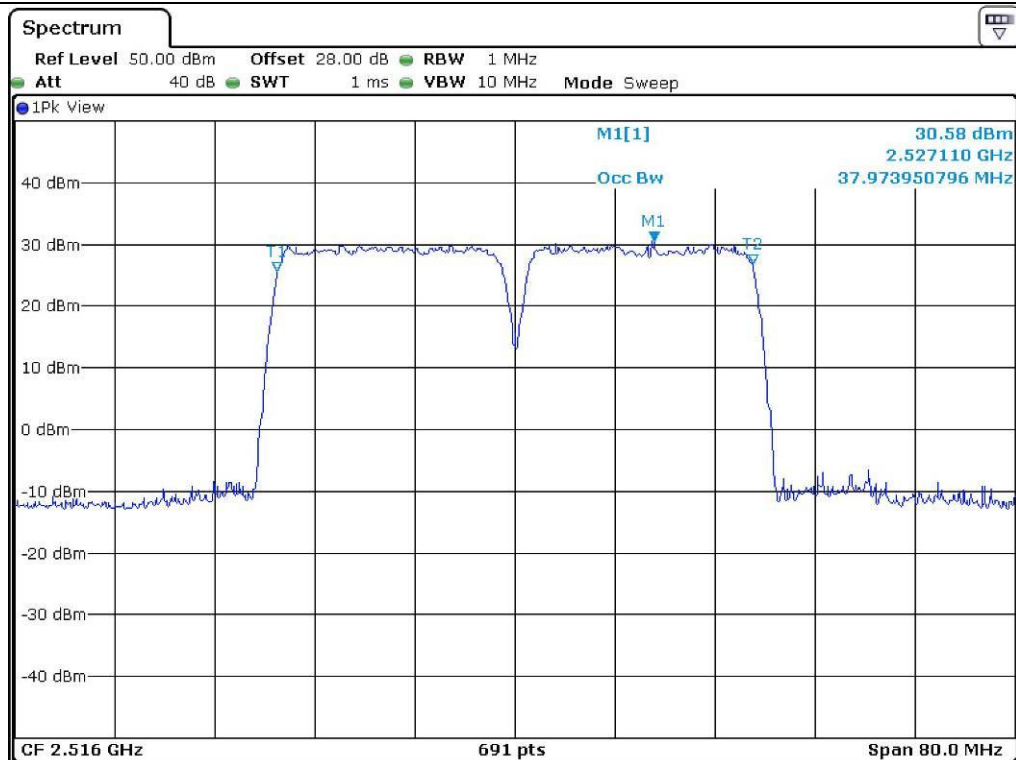


64 QAM – 99 % Occupied Bandwidth (Low Channel)

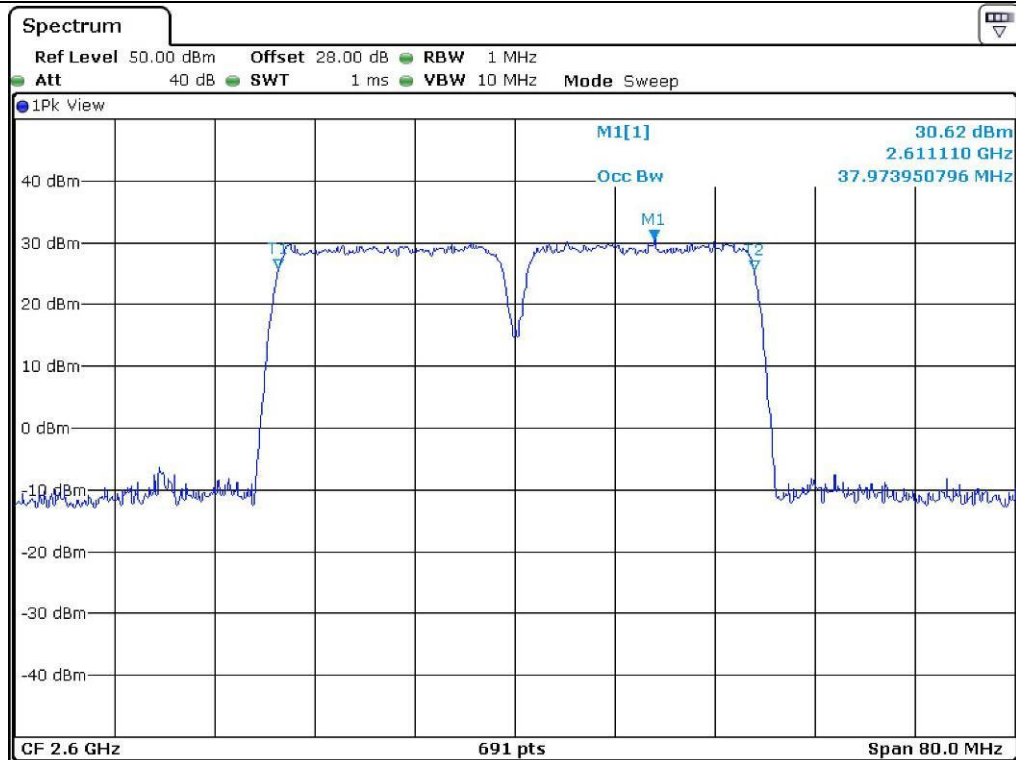


64 QAM – 99 % Occupied Bandwidth (Middle Channel)

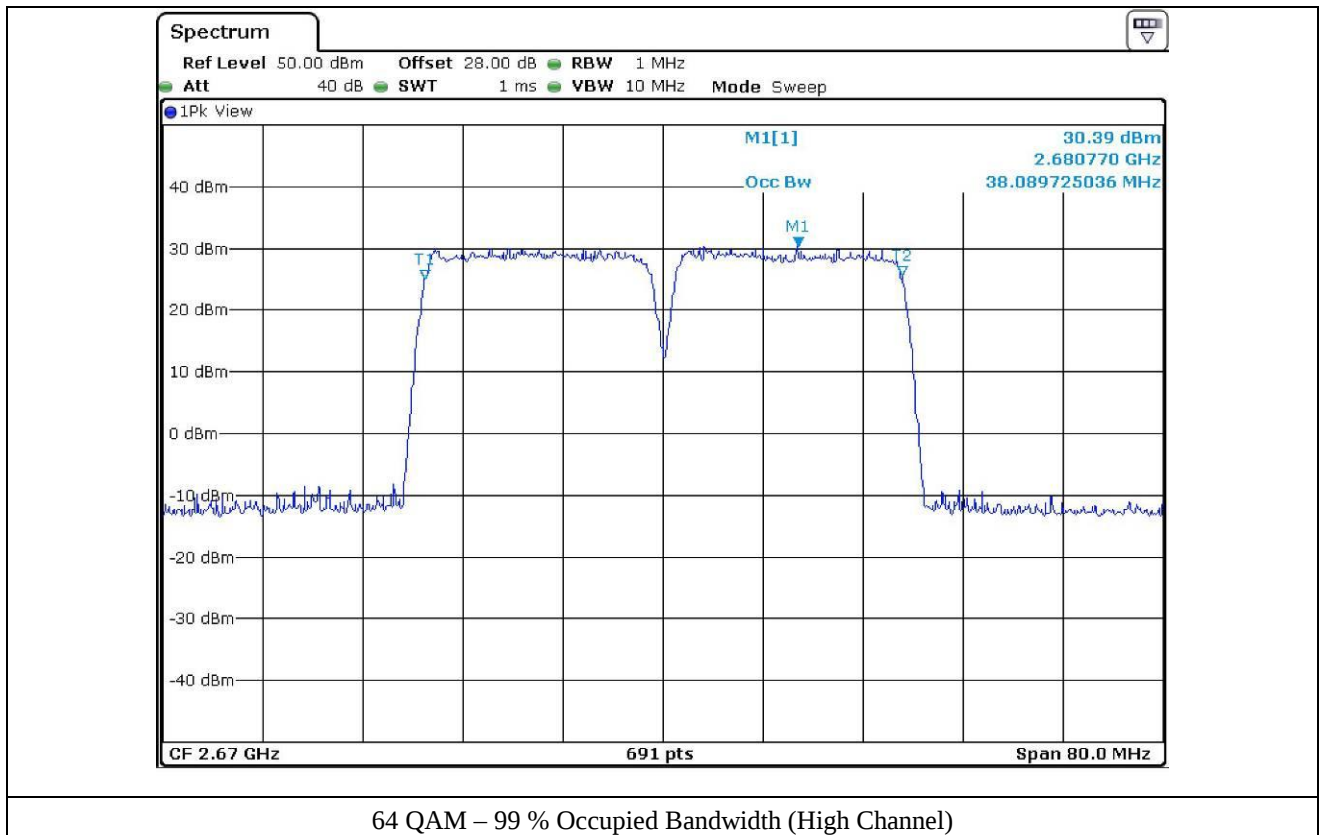


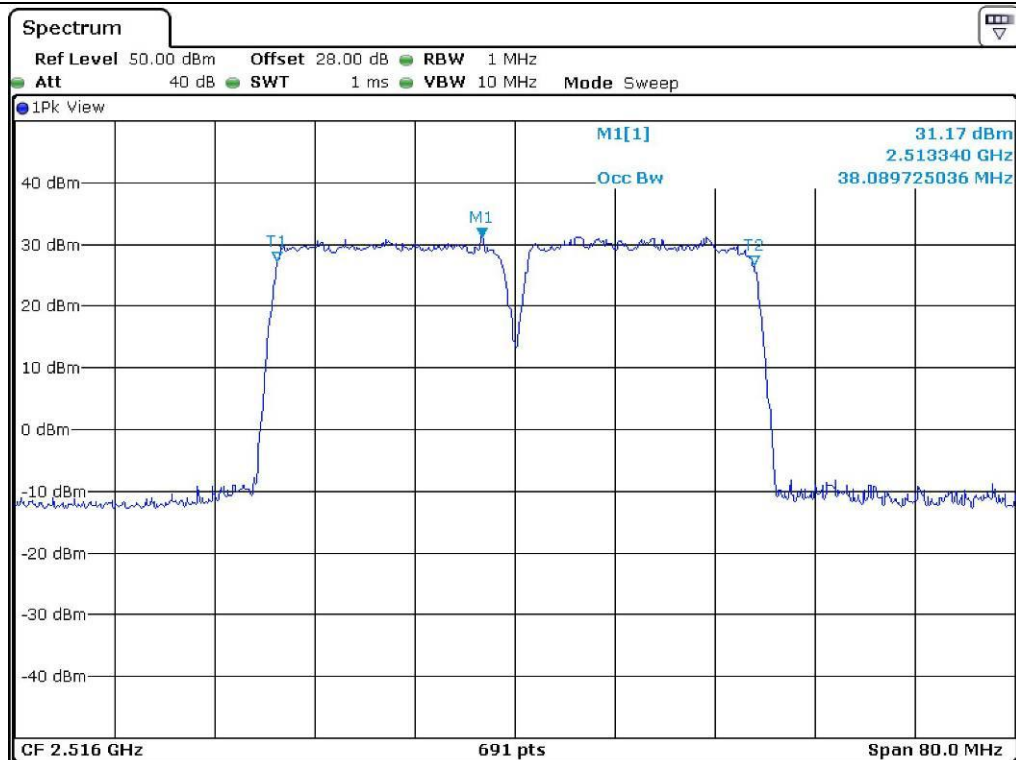

QPSK – 99 % Occupied Bandwidth (Low Channel)

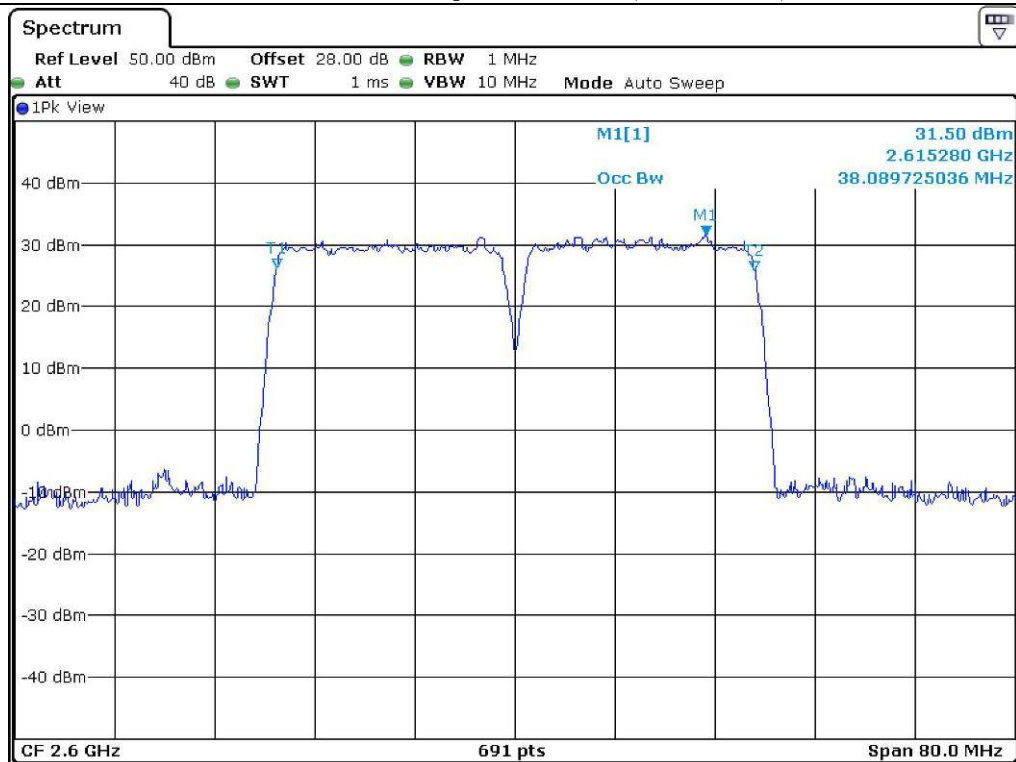

QPSK – 99 % Occupied Bandwidth (Middle Channel)

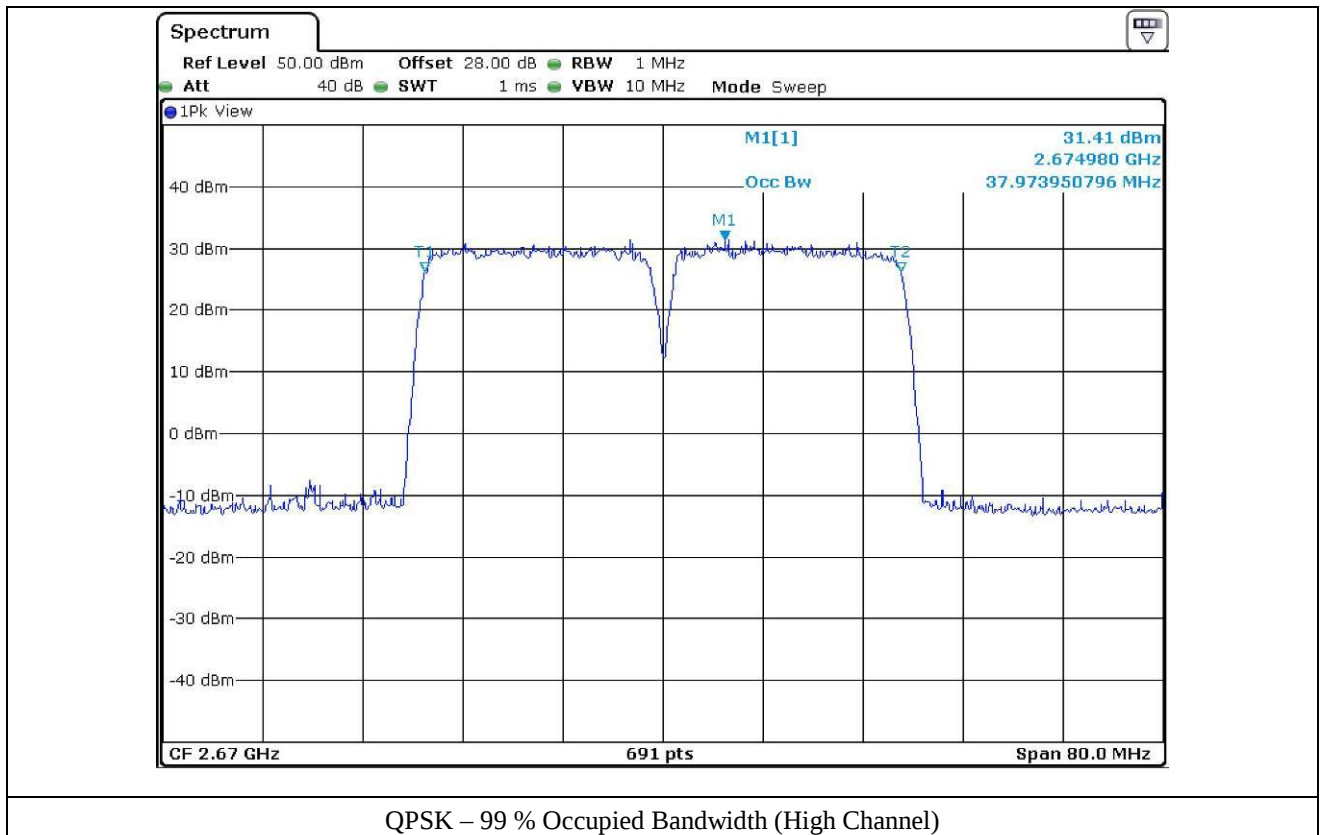

6.4.3 Test Result (20 MHz/3 Carrier)

-. Test Date : July 31, 2014


-. Test Result : Pass

Modulation	Channel	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
16 QAM	Low	62.700	58.400
	Middle	62.700	58.400
	High	62.700	58.200
64 QAM	Low	62.500	58.400
	Middle	62.500	58.200
	High	62.500	58.200
QPSK	Low	62.700	58.400
	Middle	62.500	58.500
	High	62.700	58.200


Remark: According to above result, the carrier frequency shall be within the frequency block edges.




Tested by: Tae-Ho, Kim / Project Engineer

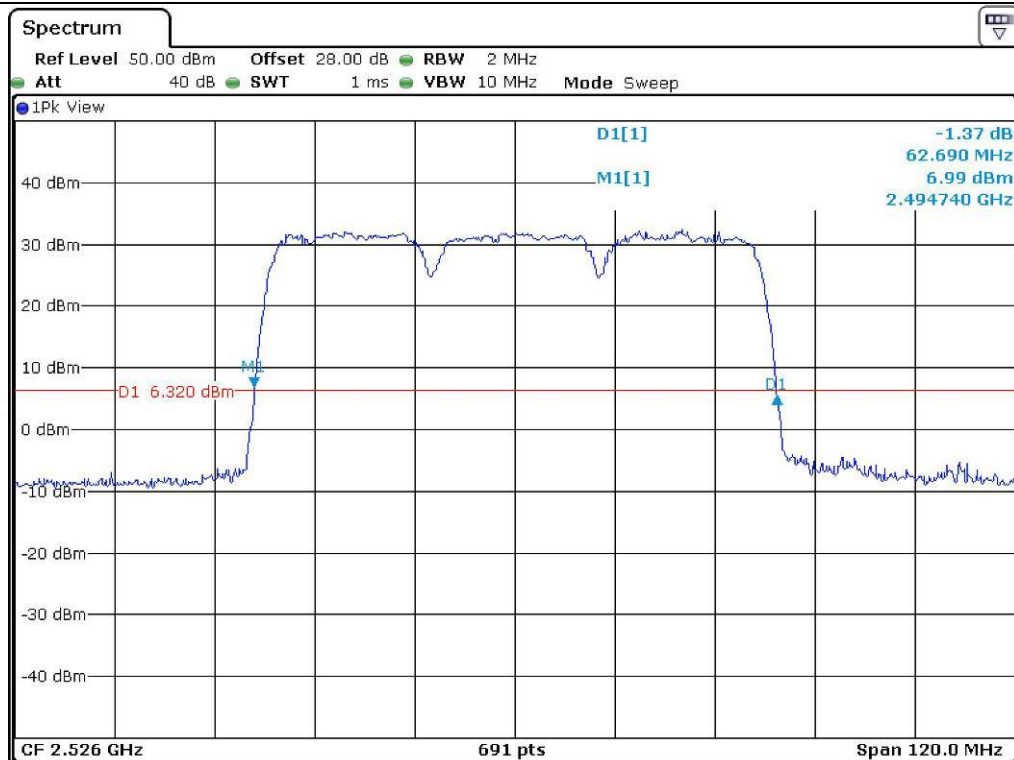


16 QAM – 26 dB Bandwidth (Low Channel)

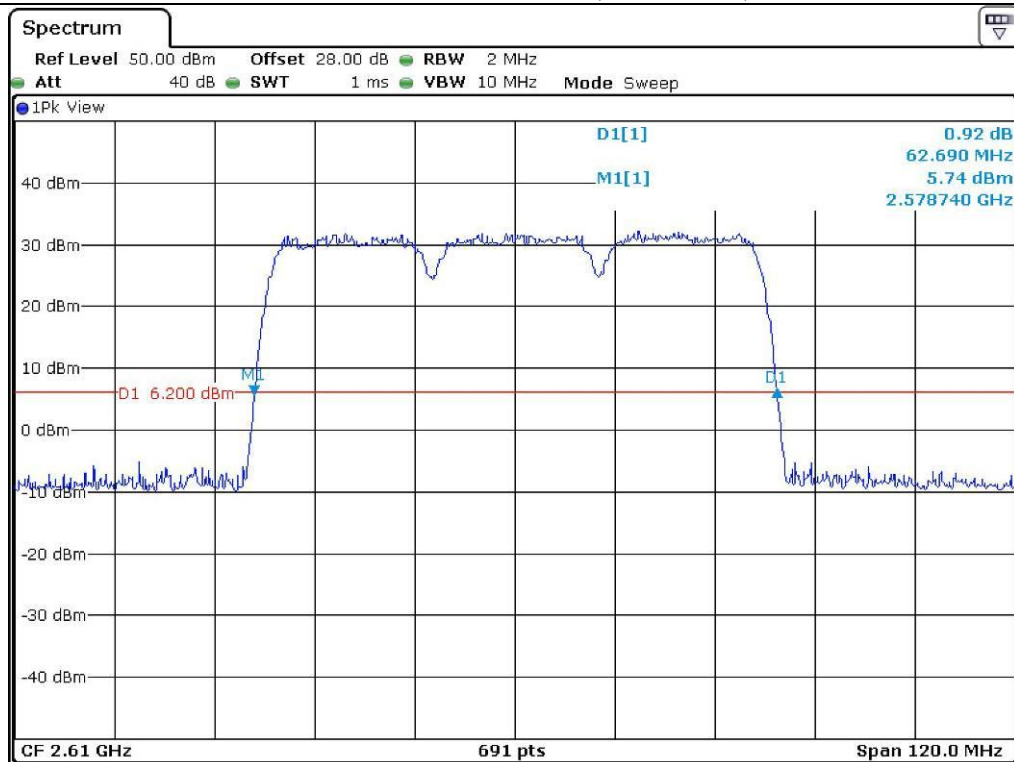


16 QAM – 26 dB Bandwidth (Middle Channel)

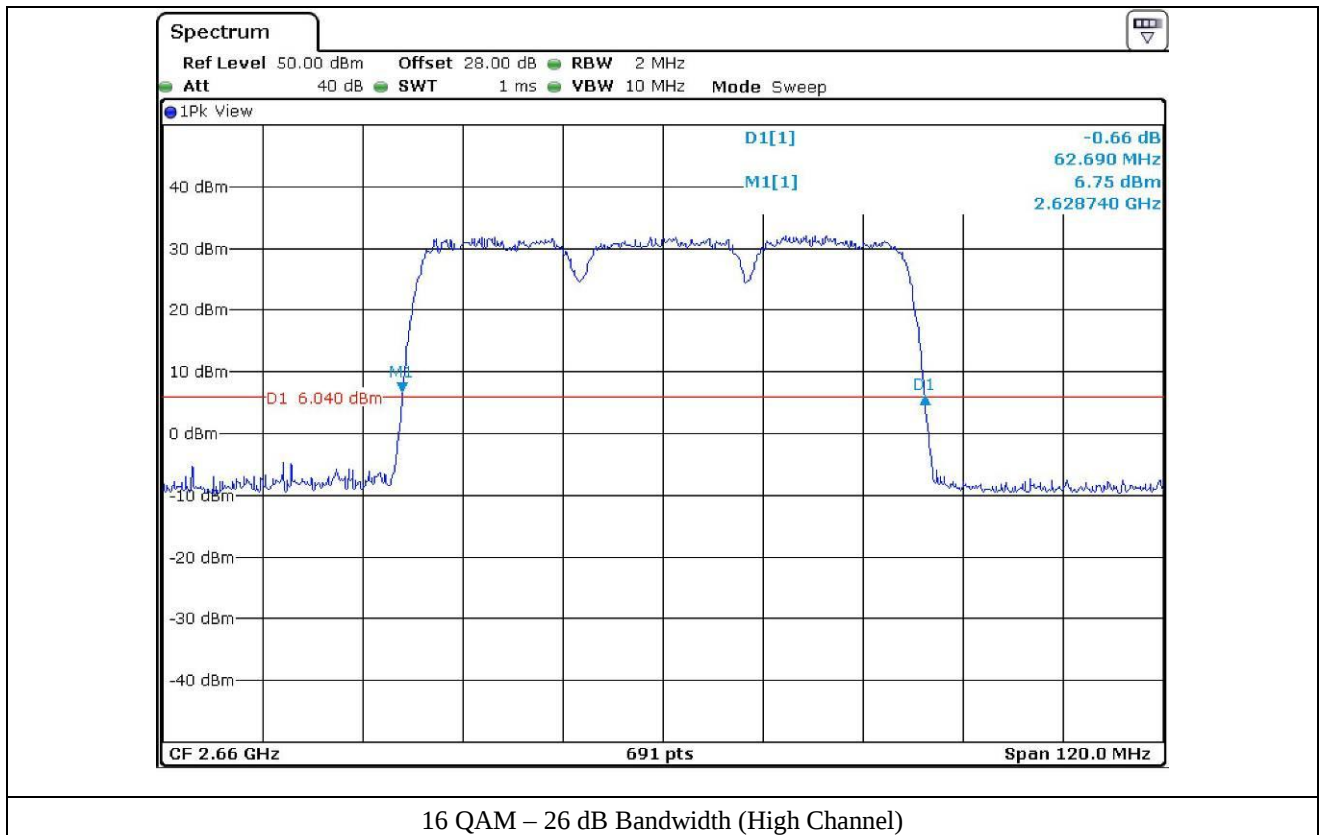


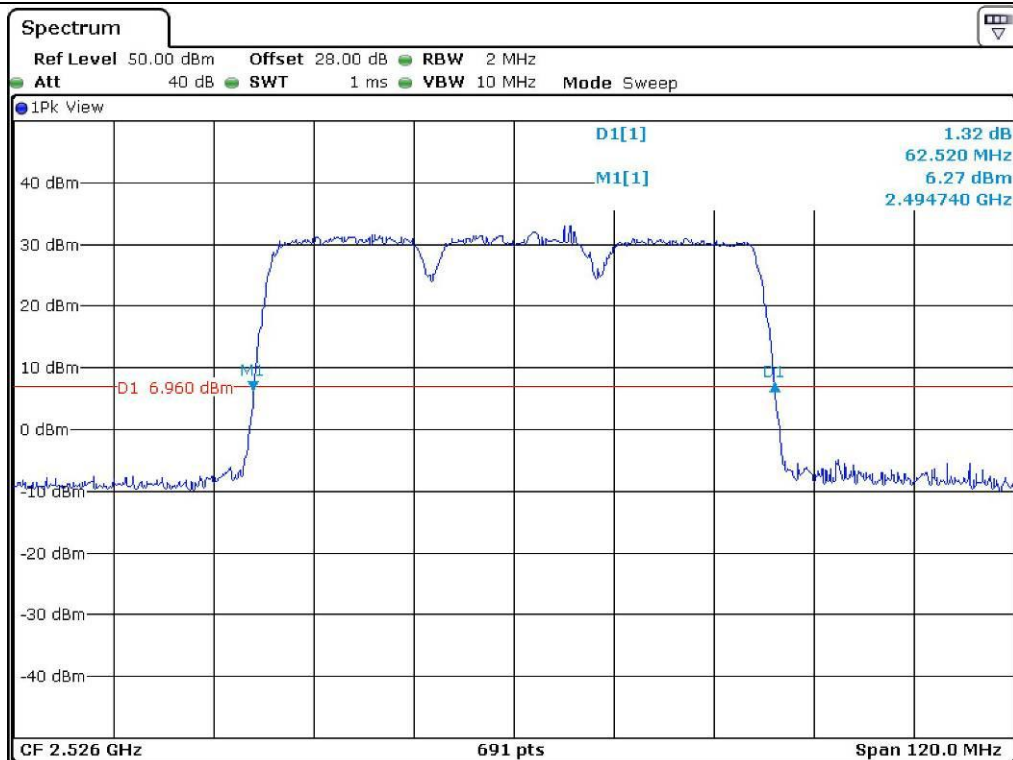


64 QAM – 26 dB Bandwidth (Low Channel)

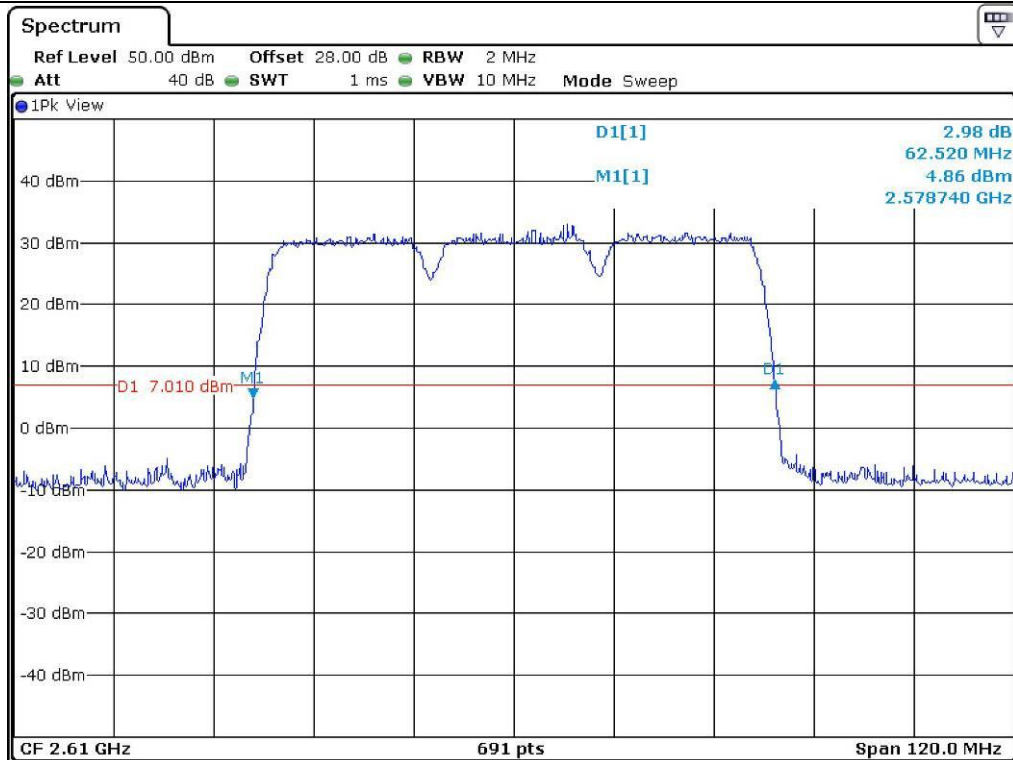


64 QAM – 26 dB Bandwidth (Middle Channel)

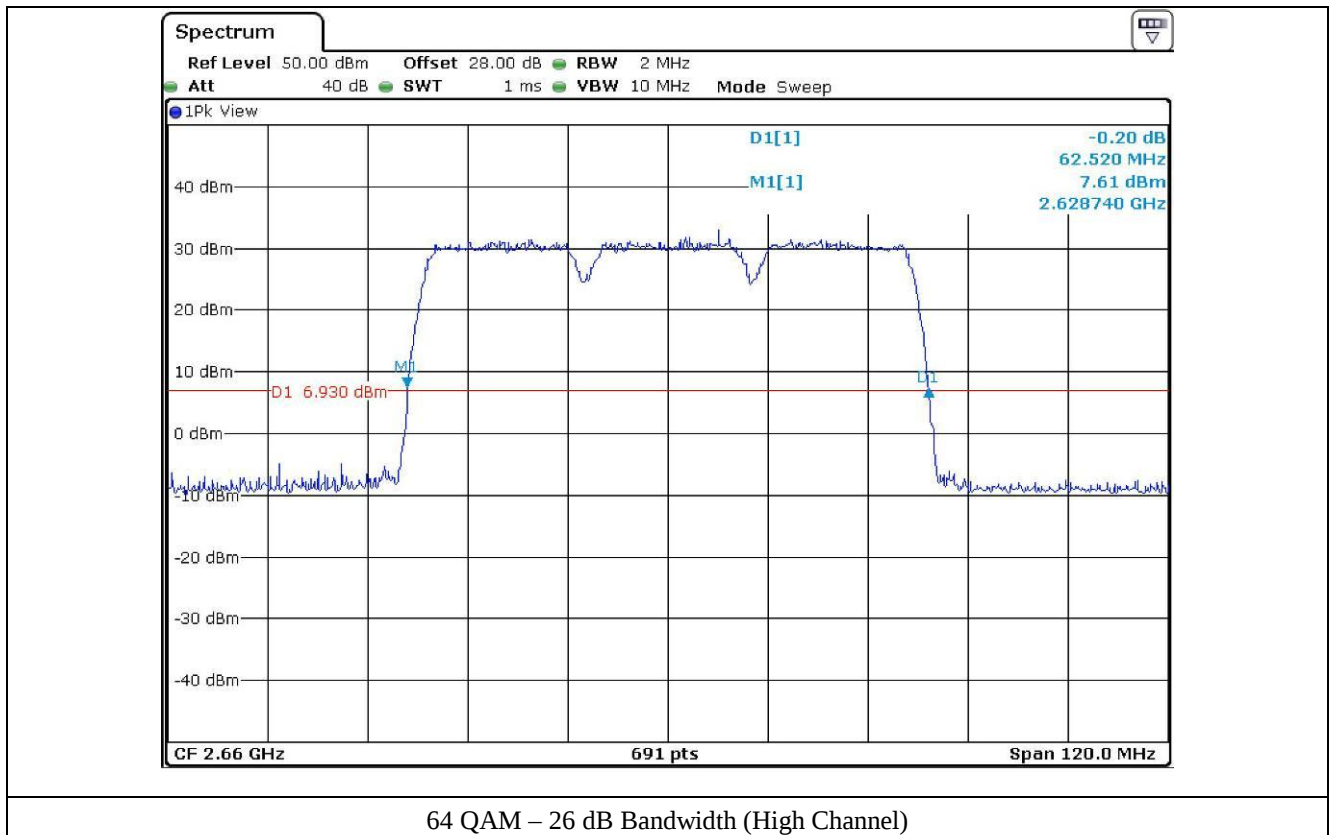


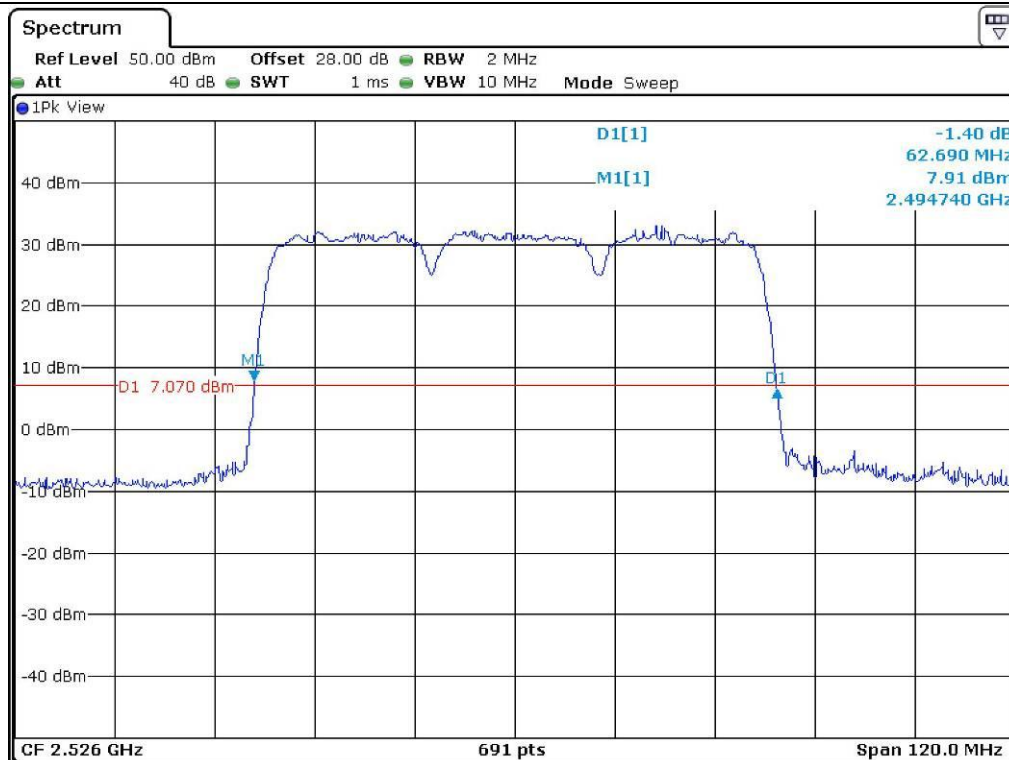


QPSK – 26 dB Bandwidth (Low Channel)

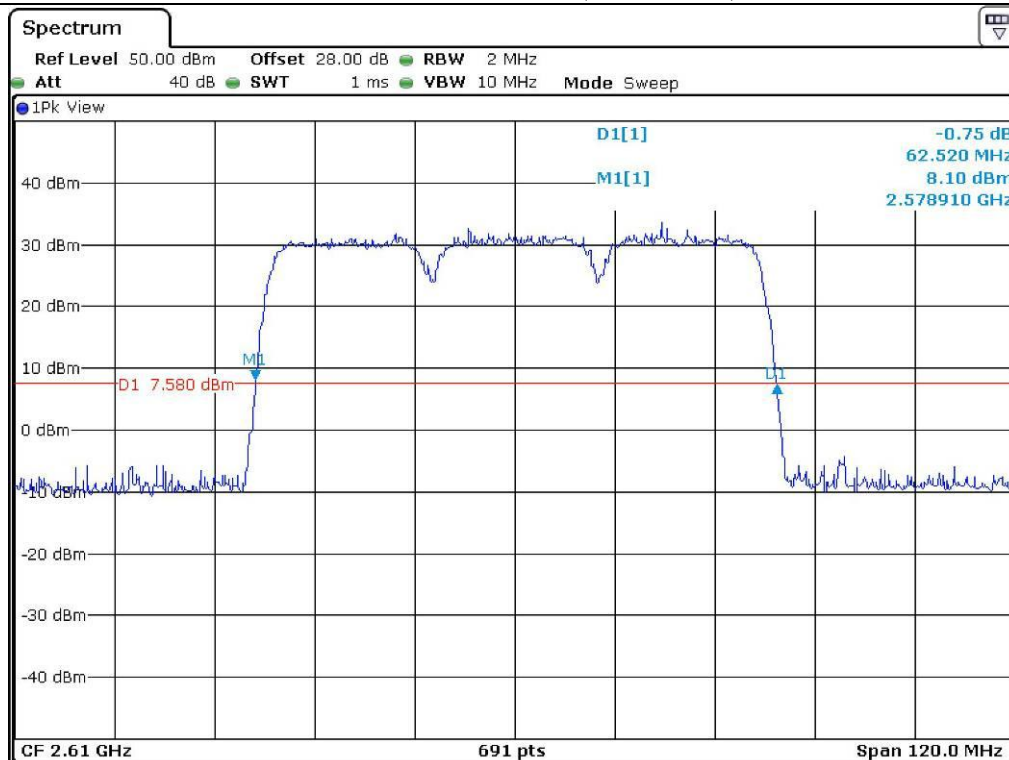


QPSK – 26 dB Bandwidth (Middle Channel)

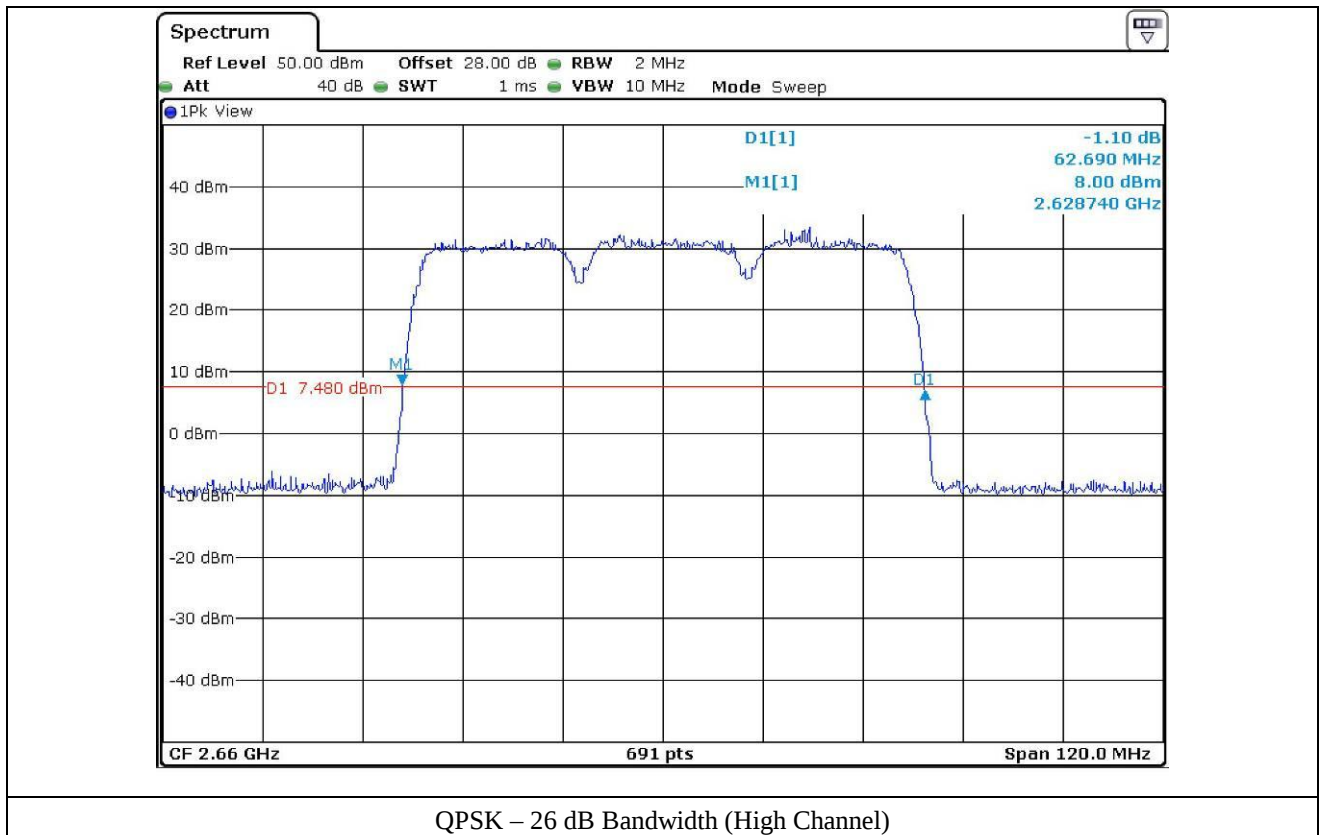


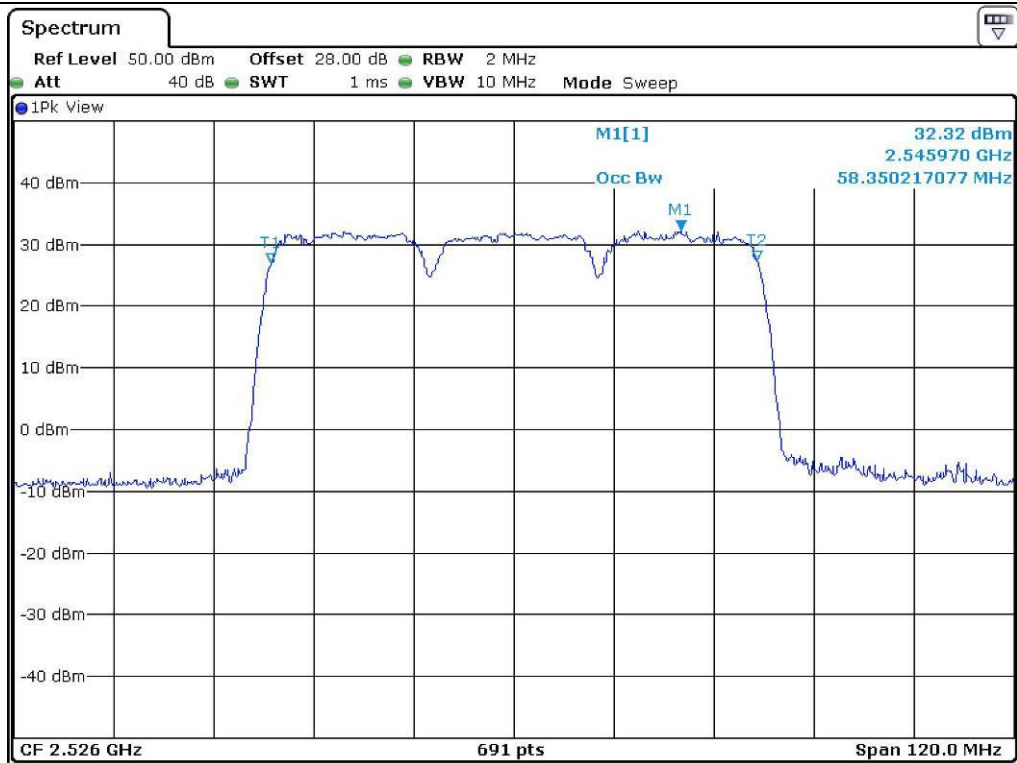


16 QAM – 99 % Occupied Bandwidth (Low Channel)

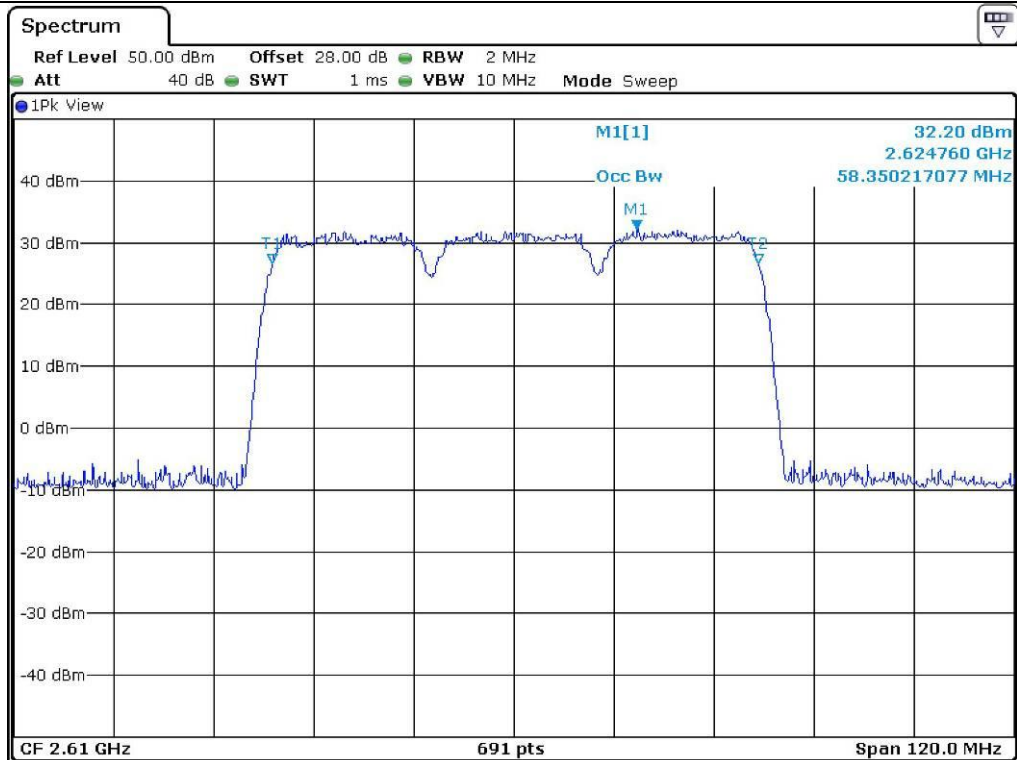


16 QAM – 99 % Occupied Bandwidth (Middle Channel)

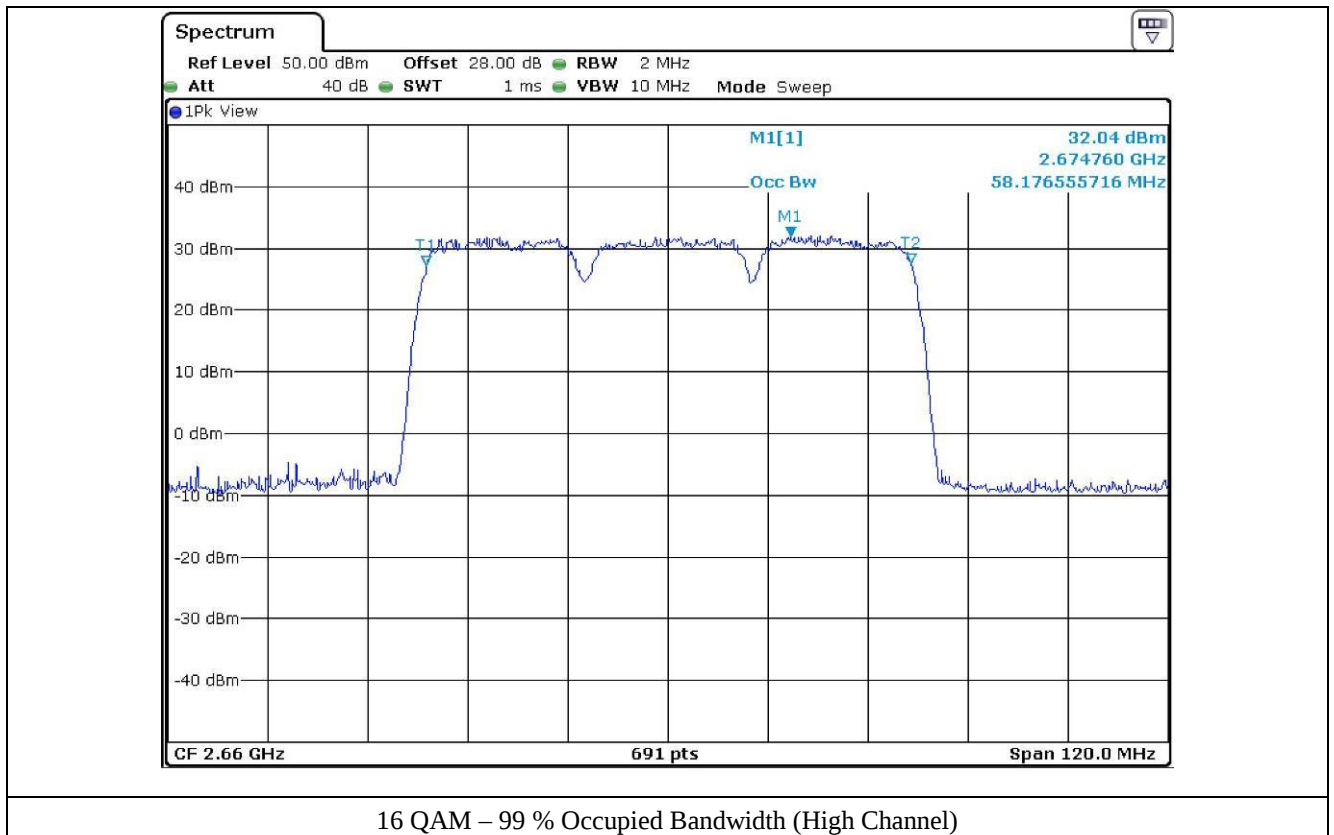


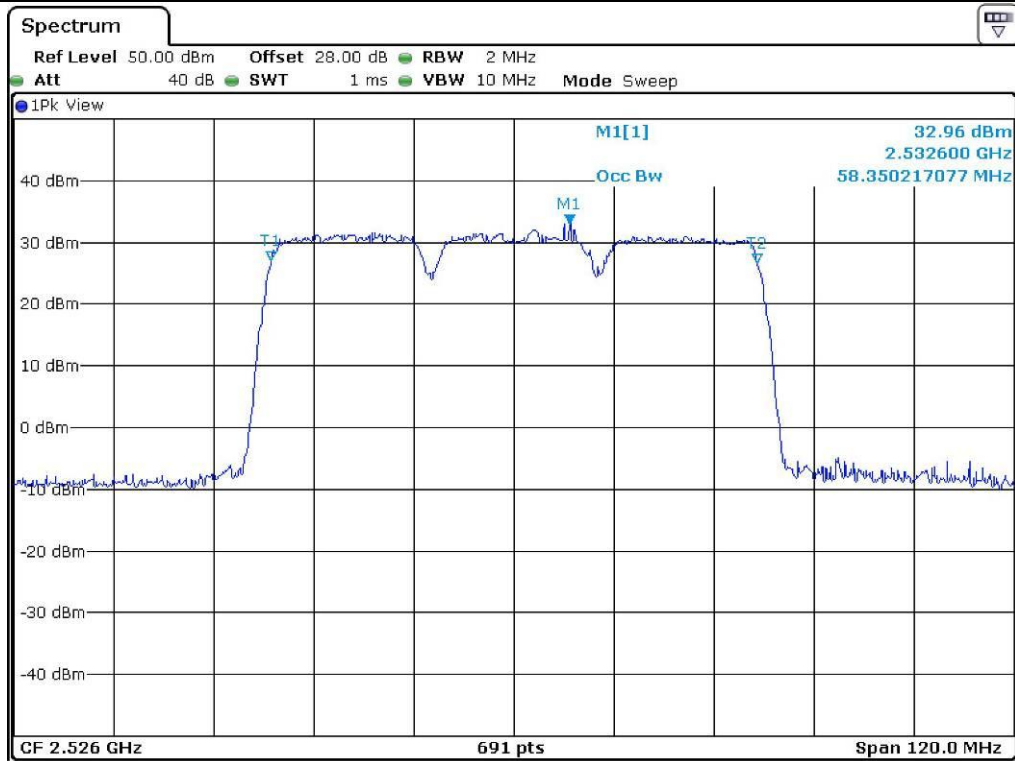


64 QAM – 99 % Occupied Bandwidth (Low Channel)

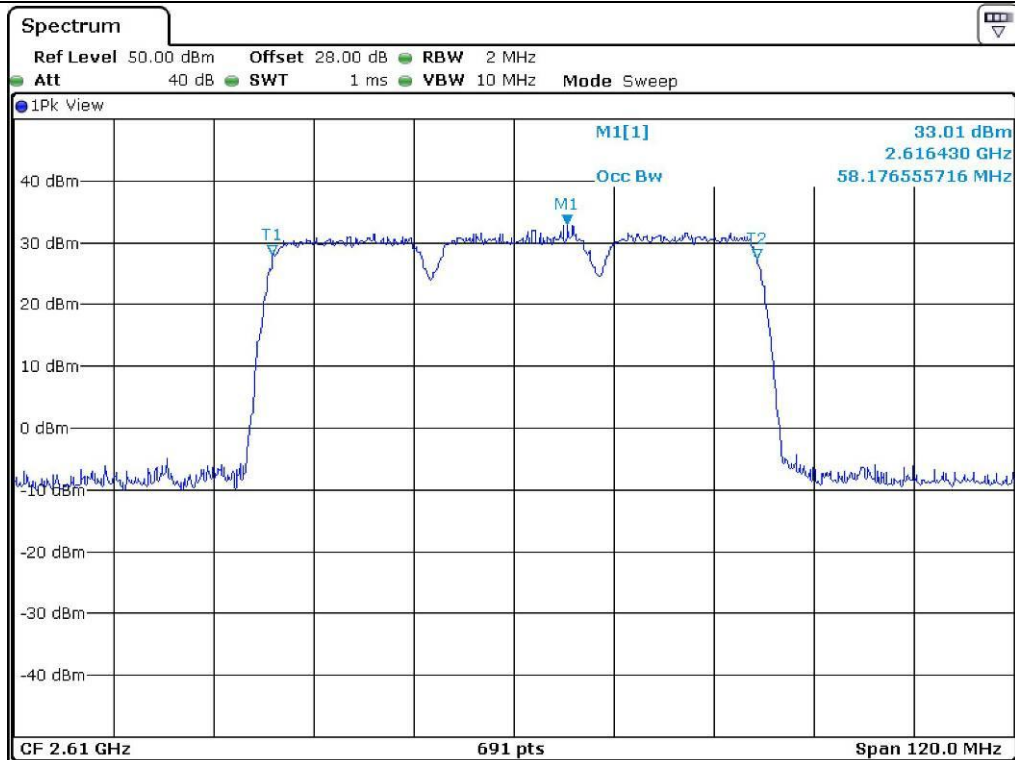


64 QAM – 99 % Occupied Bandwidth (Middle Channel)

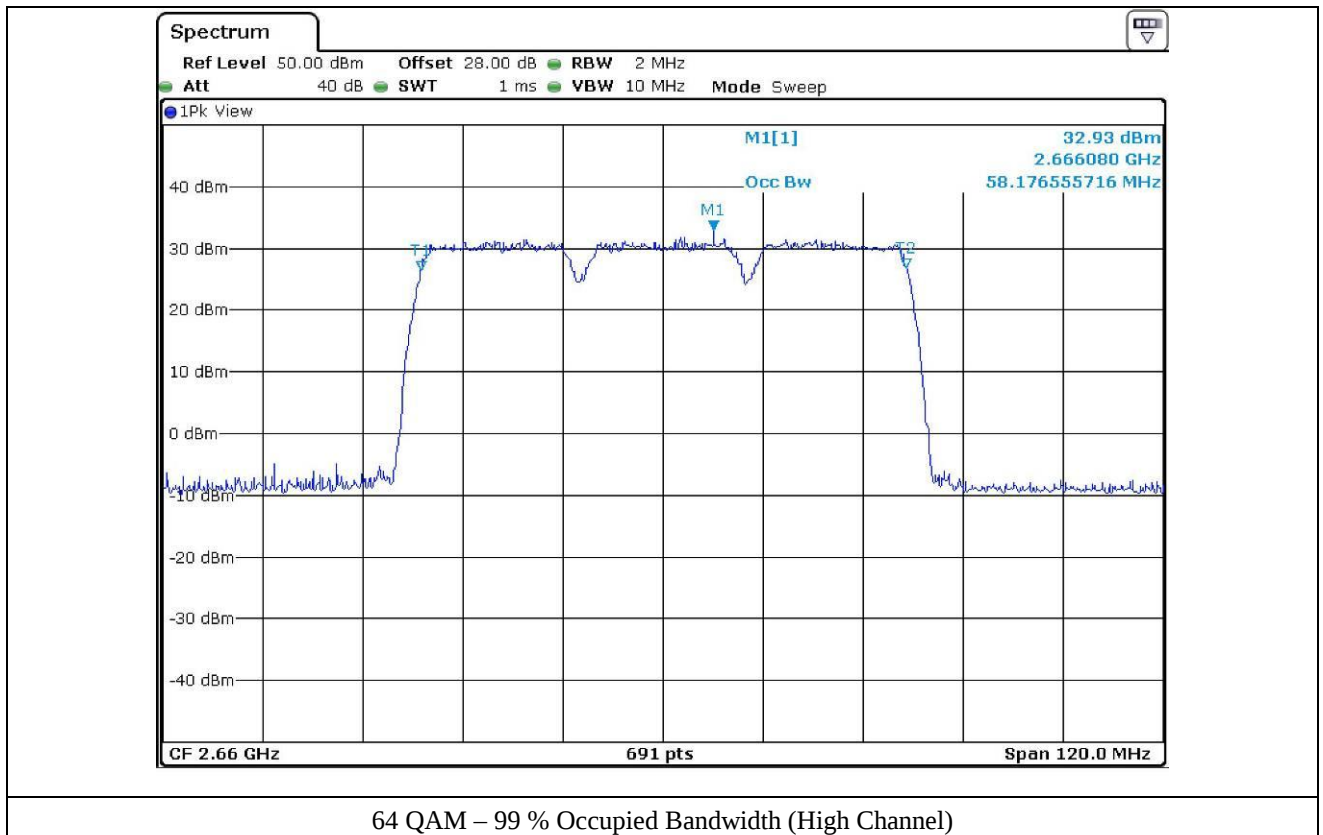


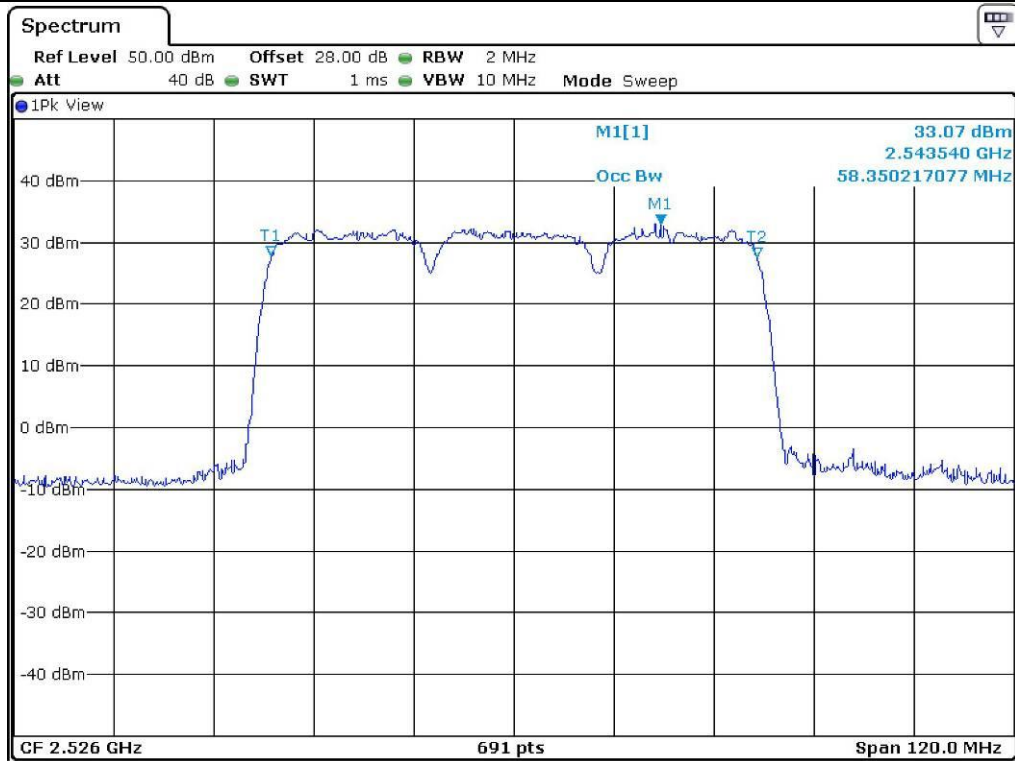

QPSK – 99 % Occupied Bandwidth (Low Channel)

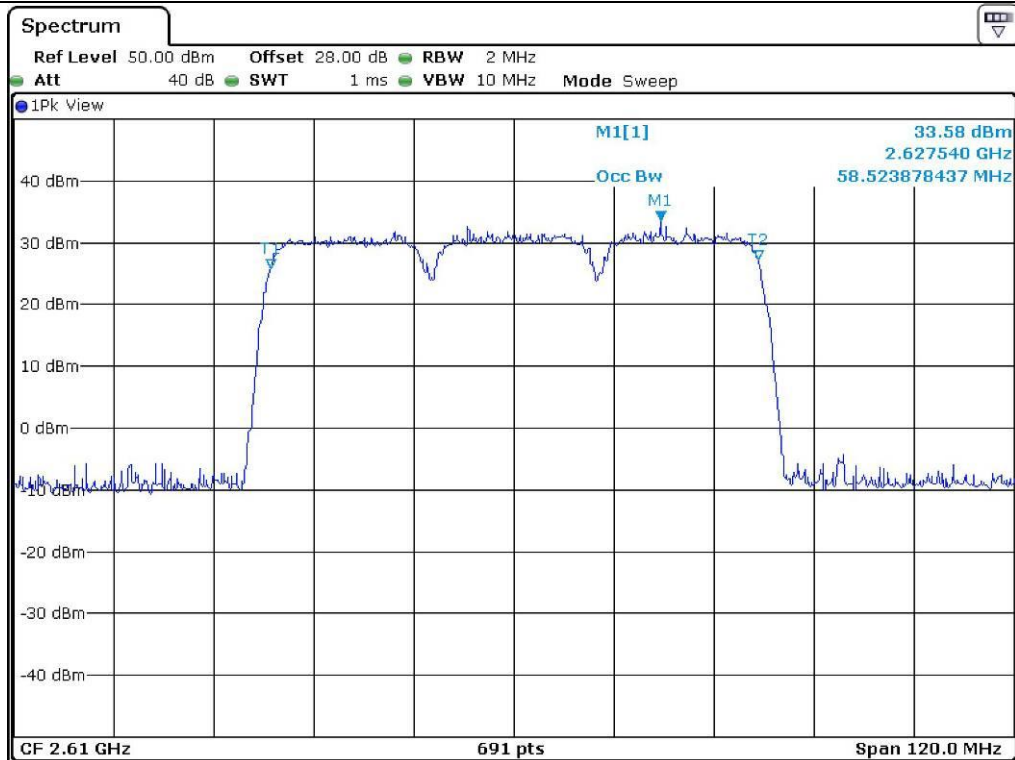

QPSK – 99 % Occupied Bandwidth (Middle Channel)

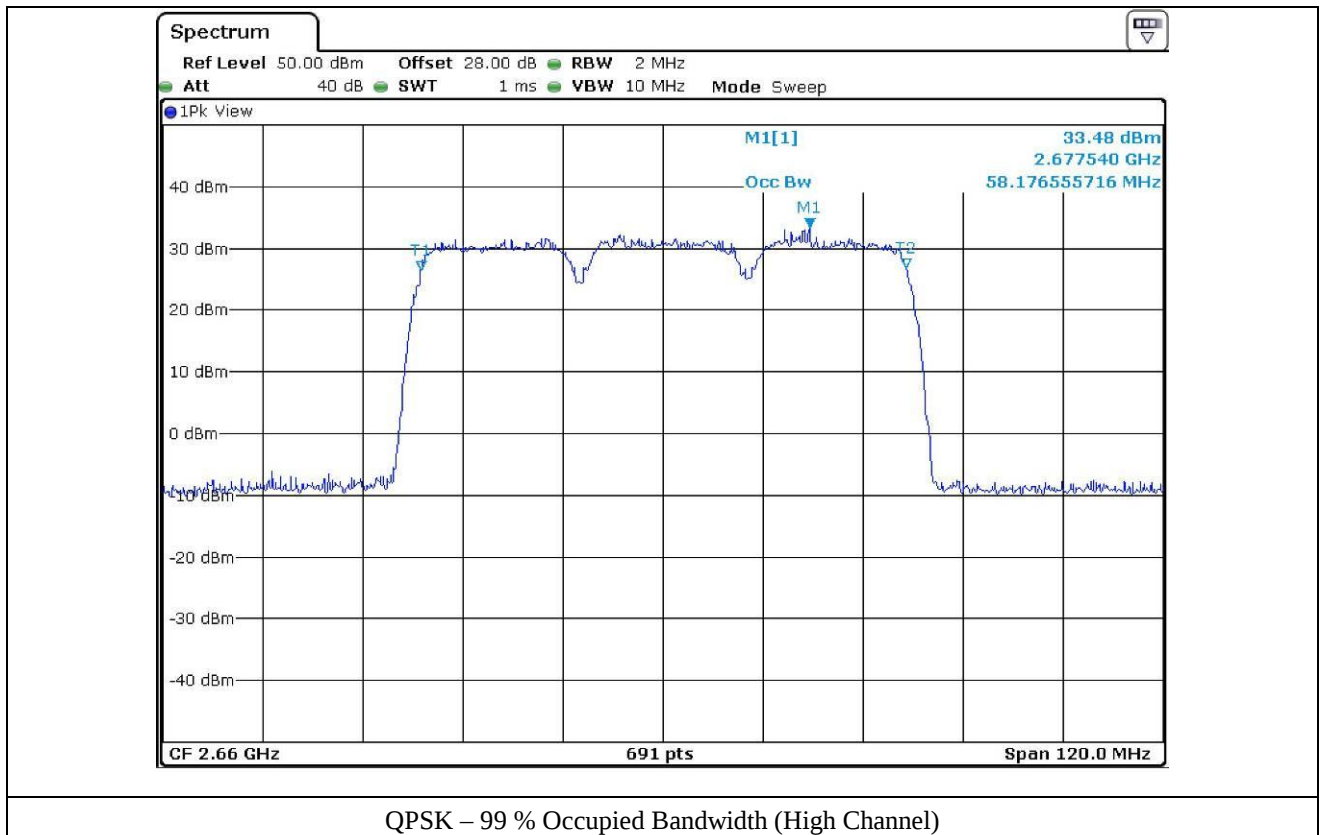

6.5 Test data for Port 1

6.5.1 Test Result (20 MHz/1 Carrier)

-. Test Date : July 31, 2014


-. Test Result : Pass

Modulation	Channel	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
16 QAM	Low	19.500	18.100
	Middle	19.500	18.000
	High	19.500	18.000
64 QAM	Low	19.500	18.000
	Middle	19.600	18.000
	High	19.500	18.000
QPSK	Low	19.600	18.100
	Middle	19.600	18.100
	High	19.600	18.100


Remark: According to above result, the carrier frequency shall be within the frequency block edges.



Tested by: Tae-Ho, Kim / Project Engineer

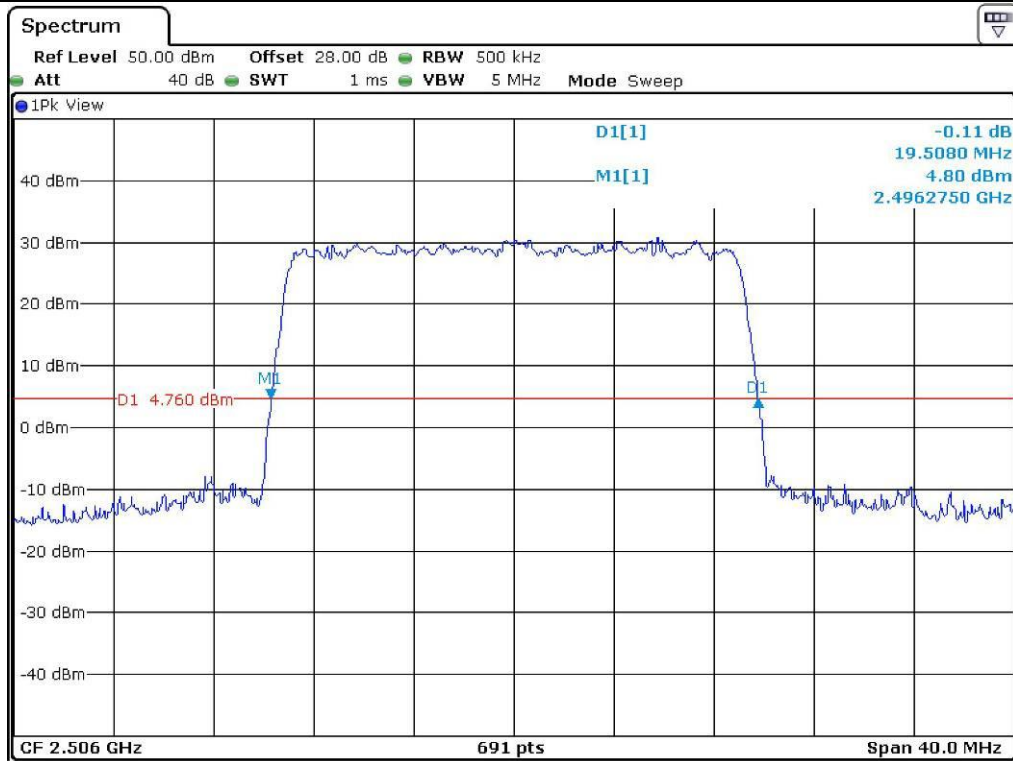

16 QAM – 26 dB Bandwidth (Low Channel)

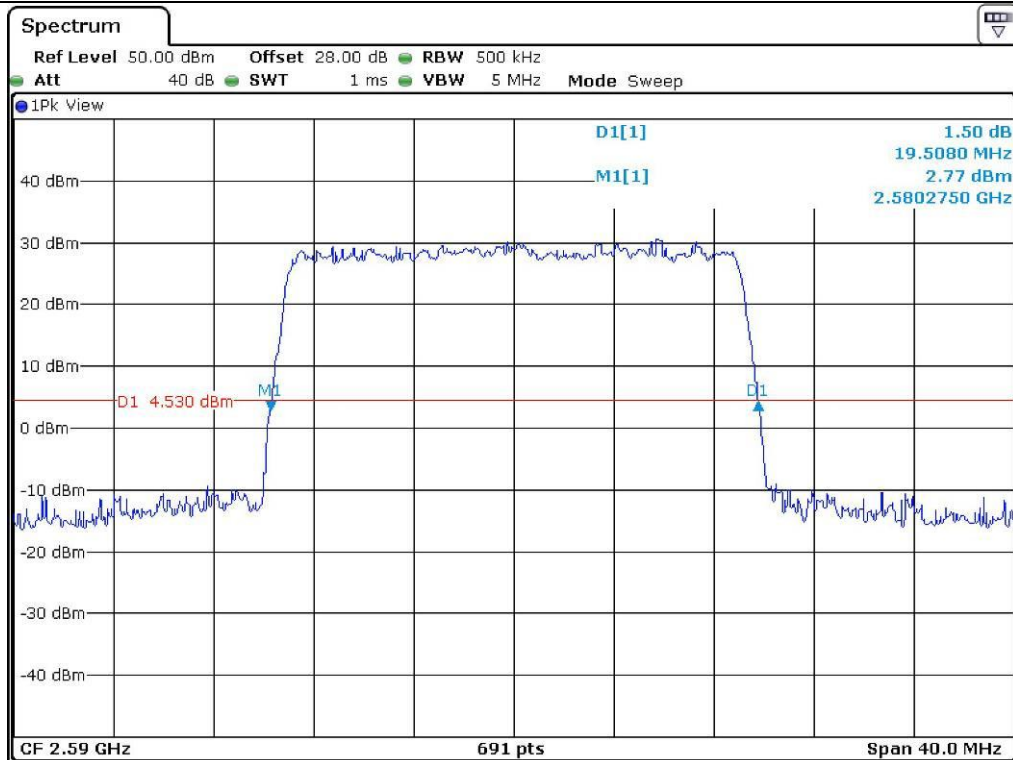

16 QAM – 26 dB Bandwidth (Middle Channel)

