

TEST REPORT

FCC UNII 6G Test for SC-55F
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2505-FC120

DATE OF ISSUE
June 5, 2025

Tested by
Sang Hoon Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.
HCT-RF-2505-FC120

DATE OF ISSUE
June 05, 2025

Applicant SAMSUNG Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name Mobile Phone
Model Name SC-55F

FCC ID A3LSMF766JPN

Date of Test February 26, 2025 ~ April 22, 2025

Modulation type OFDM/OFDMA

FCC Classification 15E 6 GHz Low Power Dual Client
15E 6 GHz Very Low Power Device

Test Standard Used FCC Rule Part(s): Part 15.407

Test Results PASS

Location of Test ☒ Permanent Testing Lab ☐ On Site Testing Lab
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 05, 2025	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

Data referencing : UNII 6G Report (FCC ID: A3LSMF766U, Report No. HCT-RF-2504-FC034)

CONTENTS

1. GENERAL INFORMATION	6
EUT DESCRIPTION	6
ANTENNA CONFIGURATIONS	7
2. MAXIMUM OUTPUT POWER	10
3. TEST METHODOLOGY	13
EUT CONFIGURATION	13
EUT EXERCISE	13
GENERAL TEST PROCEDURES	13
DESCRIPTION OF TEST MODES	14
4. INSTRUMENT CALIBRATION	14
5. FACILITIES AND ACCREDITATIONS	14
5.1 FACILITIES	14
5.2 EQUIPMENT	14
6. ANTENNA REQUIREMENTS	15
7. MEASUREMENT UNCERTAINTY	15
8. DESCRIPTION OF TESTS	16
9. SUMMARY OF TEST RESULTS & DATA REFERENCING	44
10. TEST RESULT	47
10.1 DUTY CYCLE	47
10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH	56
10.2.1 26 dB BANDWIDTH(Indoor client, Very Low Power Device)	56
10.2.1.1 Ant1	56
10.2.1.2 Ant2	73
10.2.2 26 dB BANDWIDTH(Standard client)	90
10.2.2.1 Ant1	90
10.2.2.2 Ant2	102
10.3 OUTPUT POWER MEASUREMENT	118
10.3.1 E.I.R.P Output Power(Indoor client)	118
10.3.1.1 MIMO_CDD(Ant1+Ant2)	119
10.3.2 E.I.R.P Output Power(Standard client)	143
10.3.2.1 MIMO_CDD(Ant1+Ant2)	144
10.3.3 E.I.R.P Output Power(Very Low Power Device)	159
10.3.3.1 MIMO_CDD(Ant1+Ant2)	160
10.4 POWER SPECTRAL DENSITY	184
10.4.1 Indoor client	184
10.4.1.1 MIMO_CDD(Ant1+Ant2)	185
10.4.2 Standard client	209
10.4.2.1 MIMO_CDD(Ant1+Ant2)	210
10.4.3 Very Low Power Device	225

10.4.3.1 MIMO_CDD(Ant1+Ant2)	226
10.5 In-Band Emission	268
10.6 Contention Based Protocol	353
10.7 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	369
10.8 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	373
10.9 Transmit Power Control, Very Low Power Devices	377
10.10 FREQUENCY STABILITY.	379
10.10.1 160 MHz BW	380
10.11 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz)	384
10.12 RADIATED SPURIOUS EMISSIONS (Above 1 GHz)	385
10.12.1 Standard Client	385
10.12.2 Indoor Client	411
10.13 RADIATED RESTRICTED BAND EDGE	425
10.13.1 Standard Client	425
10.13.2 Indoor Client	436
10.14 POWERLINE CONDUCTED EMISSIONS	449
11. LIST OF TEST EQUIPMENT	450
12. ANNEX A_ TEST SETUP PHOTO	452

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SC-55F	
Additional Model	SCG35	
EUT Type	Mobile Phone	
Power Supply	DC 3.90 V	
Modulation Type	OFDM/OFDMA	
Frequency Range (MHz)	Indoor Client, Very Low Power Device	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-6	20 MHz BW : 6435 - 6515 40 MHz BW : 6445 - 6525 80 MHz BW : 6465 - 6545 160 MHz BW : 6505 320 MHz BW : 6425 - 6585
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
	U-NII-8	20 MHz BW : 6875 - 7115 40 MHz BW : 6885 - 7085 80 MHz BW : 6865 - 7025 160 MHz BW : 6825 - 6985 320 MHz BW : 6745 - 6905
	Standard Client	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
Straddle channel	Supported	
Channel Puncturing	Supported (This device only punctures to optimize network performance and never to avoid licensed incumbents)	
Antenna Specification	Type: Metal	
Serial number	Conducted : R3CY209A7HW Radiated : R3CY30S8XMR Conducted(CBP, Dual Client, Proper Power Adjustment test, TPC) : R3CY10RVE2D	

ANTENNA CONFIGURATIONS

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	O	O	O	X
802.11ax (HE20/40/80/160)	O	O	O	O
802.11be (EHT20/40/80/160/320)	O	O	O	O
802.11be (EHT20/40/80/160/320)_MRU	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6 GHz Bands simultaneously on each antenna.

Simultaneous transmission Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT}/N_{SS})$$

Band	Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
	ANT1	ANT2		CDD	SDM
UNII 5	-10.07	-9.91	2 / 2	-6.98	-9.91
UNII 6	-10.38	-10.60		-7.48	-10.38
UNII 7	-10.38	-10.60		-7.48	-10.38
UNII 8	-10.50	-10.12		-7.30	-10.12

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left(\left(10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT}/N_{SS}),$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a Maximum Conducted Output Power and EIRP Power as follows:

[Indoor Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	10.68	0.012	9.60	0.009	13.18	0.021	6.20	0.004
	EHT40	12.30	0.017	11.66	0.015	15.00	0.032	8.02	0.006
	EHT80	15.26	0.034	14.70	0.030	18.00	0.063	11.02	0.013
	EHT160	15.35	0.034	15.03	0.032	18.20	0.066	11.22	0.013
	EHT320	15.76	0.038	15.17	0.033	18.49	0.071	11.51	0.014
	802.11a	10.22	0.011	9.24	0.008	12.77	0.019	5.79	0.004
UNII6	EHT20	10.39	0.011	9.78	0.010	13.11	0.020	5.63	0.004
	EHT40	12.22	0.017	11.62	0.015	14.94	0.031	7.46	0.006
	EHT80	15.41	0.035	15.07	0.032	18.25	0.067	10.77	0.012
	EHT160	15.15	0.033	15.23	0.033	18.20	0.066	10.72	0.012
	EHT320	15.28	0.034	15.62	0.036	18.47	0.070	10.99	0.013
	802.11a	9.96	0.010	9.32	0.009	12.66	0.018	5.18	0.003
UNII7	EHT20	10.67	0.012	10.01	0.010	13.36	0.022	5.88	0.004
	EHT40	12.27	0.017	12.41	0.017	15.35	0.034	7.87	0.006
	EHT80	15.57	0.036	15.11	0.032	18.36	0.068	10.88	0.012
	EHT160	15.29	0.034	14.78	0.030	18.05	0.064	10.57	0.011
	802.11a	10.24	0.011	9.54	0.009	12.91	0.020	5.43	0.003
UNII8	EHT20	10.61	0.012	10.35	0.011	13.49	0.022	6.20	0.004
	EHT40	12.37	0.017	12.01	0.016	15.20	0.033	7.90	0.006
	EHT80	15.57	0.036	15.02	0.032	18.32	0.068	11.02	0.013
	EHT160	15.39	0.035	15.62	0.036	18.52	0.071	11.22	0.013
	EHT320	15.55	0.036	15.96	0.039	18.77	0.075	11.47	0.014
	802.11a	10.16	0.010	9.79	0.010	12.99	0.020	5.69	0.004

[Standard Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	16.29	0.043	15.61	0.036	18.97	0.079	11.99	0.016
	EHT40	16.21	0.042	15.43	0.035	18.85	0.077	11.87	0.015
	EHT80	16.36	0.043	15.69	0.037	19.05	0.080	12.07	0.016
	EHT160	16.45	0.044	16.03	0.040	19.25	0.084	12.27	0.017
	EHT320	16.83	0.048	16.28	0.042	19.57	0.091	12.59	0.018
	802.11a	15.92	0.039	15.30	0.034	18.63	0.073	11.65	0.015
UNII7	EHT20	16.35	0.043	15.89	0.039	19.14	0.082	11.66	0.015
	EHT40	16.21	0.042	16.33	0.043	19.28	0.085	11.80	0.015
	EHT80	16.67	0.046	16.15	0.041	19.43	0.088	11.95	0.016
	EHT160	16.31	0.043	15.80	0.038	19.07	0.081	11.59	0.014
	802.11a	15.95	0.039	15.53	0.036	18.76	0.075	11.28	0.013

[Very Low Power Device]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	5.63	0.004	5.28	0.003	8.47	0.007	1.49	0.001
	EHT40	8.12	0.006	7.79	0.006	10.97	0.012	3.99	0.003
	EHT80	11.33	0.014	11.06	0.013	14.21	0.026	7.23	0.005
	EHT160	11.53	0.014	11.32	0.014	14.44	0.028	7.46	0.006
	EHT320	11.90	0.015	11.12	0.013	14.54	0.028	7.56	0.006
	802.11a	5.31	0.003	5.00	0.003	8.17	0.007	1.19	0.001
UNII6	EHT20	5.81	0.004	4.25	0.003	8.11	0.006	0.63	0.001
	EHT40	8.26	0.007	7.77	0.006	11.04	0.013	3.56	0.002
	EHT80	11.28	0.013	10.51	0.011	13.92	0.025	6.44	0.004
	EHT160	11.41	0.014	10.53	0.011	14.00	0.025	6.52	0.004
	EHT320	11.60	0.014	11.58	0.014	14.60	0.029	7.12	0.005
	802.11a	5.32	0.003	4.32	0.003	7.86	0.006	0.38	0.001
UNII7	EHT20	5.26	0.003	4.79	0.003	8.04	0.006	0.56	0.001
	EHT40	8.58	0.007	8.02	0.006	11.32	0.014	3.84	0.002
	EHT80	11.45	0.014	11.45	0.014	14.46	0.028	6.98	0.005
	EHT160	11.30	0.013	10.16	0.010	13.77	0.024	6.29	0.004
	802.11a	5.43	0.003	4.80	0.003	8.14	0.007	0.66	0.001
UNII8	EHT20	5.34	0.003	5.04	0.003	8.20	0.007	0.90	0.001
	EHT40	8.52	0.007	8.29	0.007	11.41	0.014	4.12	0.003
	EHT80	11.62	0.015	11.12	0.013	14.39	0.027	7.09	0.005
	EHT160	11.84	0.015	11.22	0.013	14.55	0.029	7.25	0.005
	EHT320	11.67	0.015	11.35	0.014	14.52	0.028	7.22	0.005
	802.11a	5.50	0.004	5.22	0.003	8.37	0.007	1.08	0.001

3. TEST METHODOLOGY

U-NII 6 GHz devices operating in the 5.925-7.125 GHz band was tested using the following measurement procedure.

[1] FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03(October 10, 2024)

[2] KDB 789033 D02 General UNII Test Procedures New Rules v02r01(December 14, 2017)

[3] ANSI C63.10(2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ($\pm$ kHz)
X dB, 99% Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Power Meter)	0.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Signal Analyzer)	0.68 (Confidence level about 95 %, $k=2$)
Power Spectral Density	1.03 (Confidence level about 95 %, $k=2$)
In-Band Emissions	0.99 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

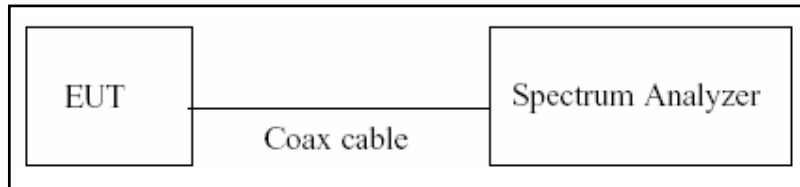

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 26 dB Bandwidth & 99 % Occupied Bandwidth

Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

Test Configuration

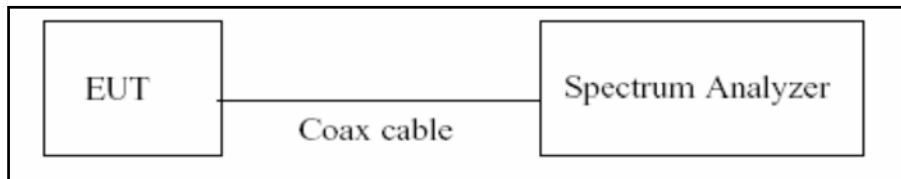

Test Procedure (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (99 % Occupied Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure D in KDB 789033 D02 v02r01.

1. RBW = 1 % ~ 5 % of the occupied bandwidth
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Use the 99 % power bandwidth function of the instrument

Note:

1. We tested X dB & 99 % bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. The 26 dB bandwidth is used to determine the in-Band Emission limits.

8.3. Output Power Measurement

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	24 dBm

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

Standard Client Limit

Band	Limit (e.i.r.p)
UNII 5,7	30 dBm

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.


Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	14 dBm

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-7.125 GHz bands, the maximum e.i.r.p must not exceed 14 dBm.

Test Configuration

Power Meter

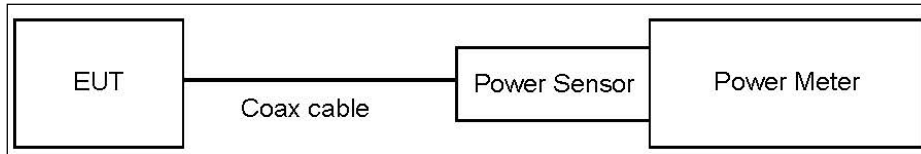

Test Procedure (Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Power Meter offset

Ant.1: Attenuator loss(20 dB) + Cable loss + EUT Cable Loss(0.5 dB)

Ant.2: Attenuator loss(20 dB) + Cable loss

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	21.43	20.93
UNII 6	21.43	20.93
UNII 7	21.43	20.93
UNII 8	21.43	20.93

(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	-1 dBm/MHz

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

Standard Client Limit


Band	Limit (e.i.r.p)
UNII 5,7	17 dBm/MHz

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band

Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	-5 dBm/MHz

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-7.125 GHz bands, the maximum e.i.r.p must not exceed 14 dBm, the maximum power spectral density must not exceed -5 Bm e.i.r.p. in any 1-megahertz band

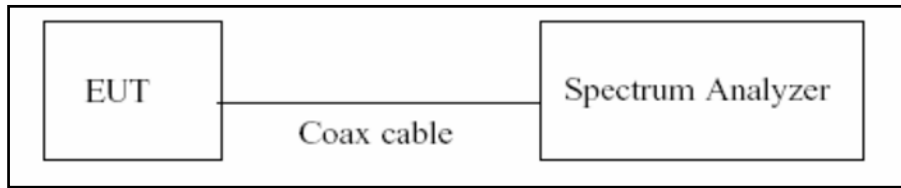Test ConfigurationTest Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq$ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to "free run".
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

Ant.1: Attenuator loss(20 dB) + Cable loss + EUT Cable Loss(0.5 dB)

Ant.2: Attenuator loss(20 dB) + Cable loss


3. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	21.43	20.93
UNII 6	21.43	20.93
UNII 7	21.43	20.93
UNII 8	21.43	20.93

(Actual value of loss for the attenuator and cable combination)

8.5. In-Band Emission (Emissions Mask)

Test Configuration

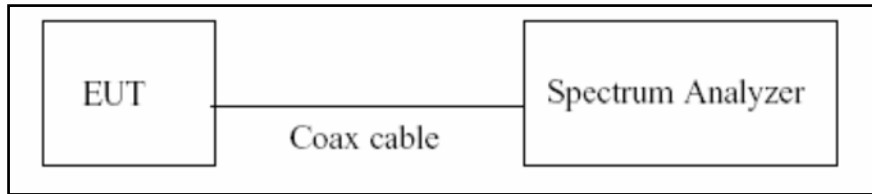


Test Procedure

We tested according to Procedure J in KDB 987594 D02.

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a. Set the span to encompass the entire 26 dB EBW of the signal.
 - b. Set RBW = same RBW used for 26 dB EBW measurement.
 - c. Set $VBW \geq 3 \times RBW$
 - d. Number of points in sweep $\geq [2 \times \text{span} / RBW]$.
 - e. Sweep time = auto.
 - f. Detector = RMS (i.e., power averaging)
 - g. Trace average at least 100 traces in power averaging (rms) mode.
 - h. Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.


6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

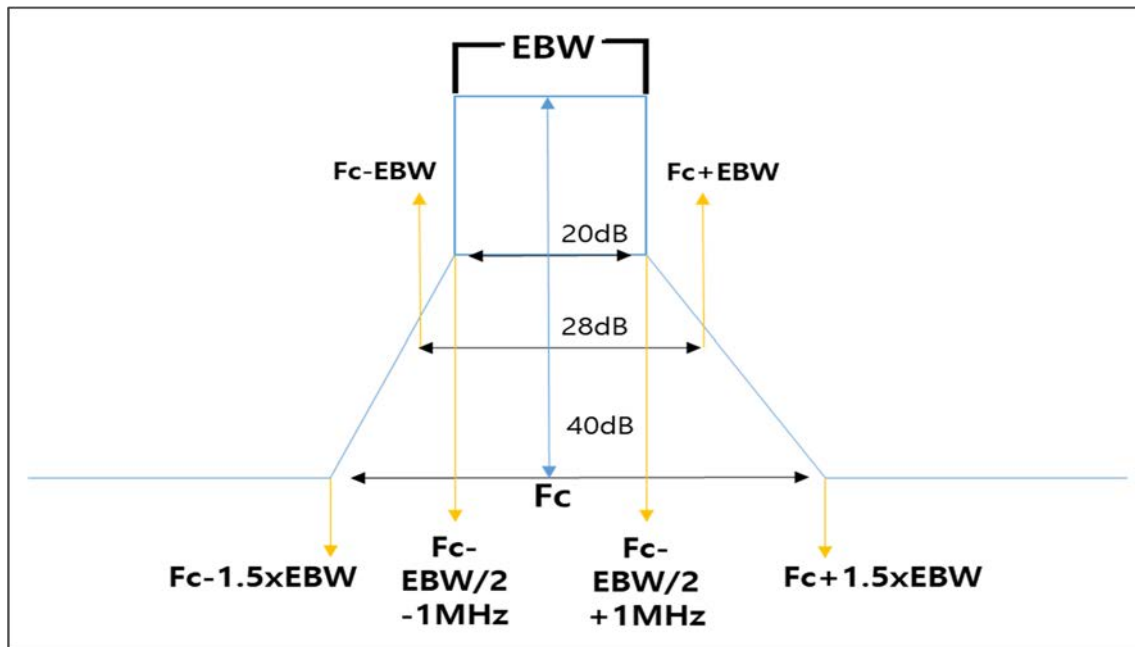

Generic Emission Mask

8.6. Contention Based Protocol

Test Configuration

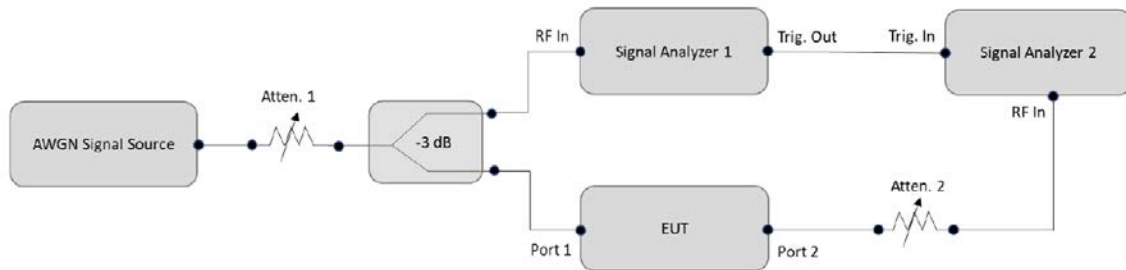

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Test Configuration. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Test Configuration.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

Sample Calculation

Incumbent signal Power(dBm) = Measured Value(dBm)

Modified Detection Limit(dBm) = Detection Limit(-62 dBm) + Antenna Gain(dBi)

8.7. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP


Limit

Standard Power AP : Not to exceed 30 dBm EIRP

Low Power Indoor AP : Not to exceed 24 dBm EIRP

Test Configuration

The EUT was connected to a standard power&Low Power indoor 6GHz access point (CMX 500).

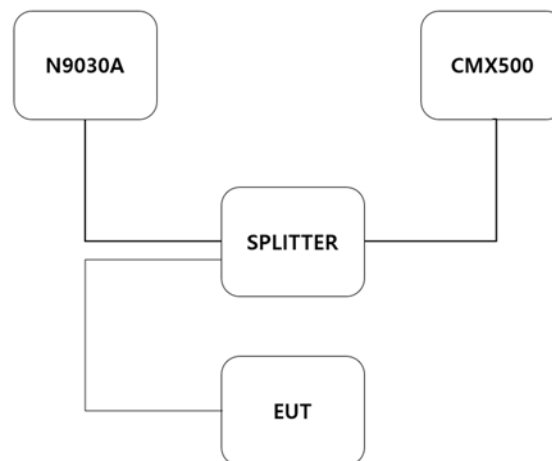

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect the equipment according to the specified test configuration.
2. Configure both the client device and the AP (CMX500) to establish a connection and initiate data transmission. Ensure that the client is transmitting at its maximum power level.
3. Verify the communication between the client and the standard power AP (CMX500). Additional attenuators may be required to protect measurement equipment. Measure the client's RF output using one of the methods described in ANSI C63.10 for NII devices.
4. Simulate the scenario where the client moves from an outdoor to an indoor environment. The client should connect to the low power indoor AP (CMX500). Verify communication between the client and the low power AP.
5. Measure the client's RF output using the same method as in Step 3. Confirm that the output does not exceed 24 dBm EIRP.

Note

The test was conducted using the CMX500 emulator in place of both the Standard Power AP and the Low Power Indoor AP.


8.8. Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

Limit

The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.

Test Configuration

The EUT was connected to a standard-power access point(CMX 500).

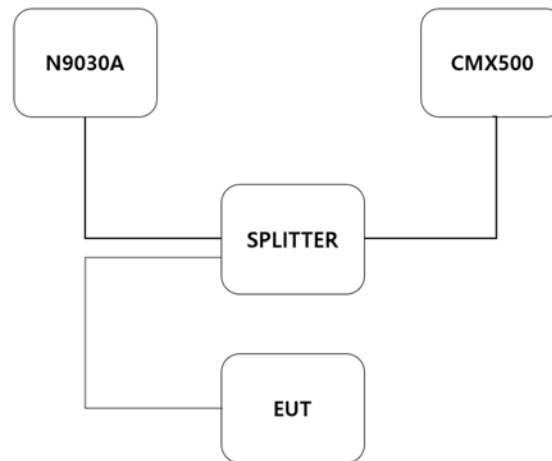

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect equipment as shown in Test Configuration.
2. Adjust Atten to Std Power AP(CMX500) so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure both the client and the AP (CMX500) so that they associate and begin streaming data at maximum transmit power. The AP should be configured to operate at a registered power level of 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP(CMX500). Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power, along with its antenna gain, to calculate the Client EIRP.
The Client EIRP should be minimally 6 dB lower than that of the AP(CMX500).
5. Repeat steps 2 through 5 at two additional measurement points: the first at the midpoint power level, and the second at the lowest power level as declared by the manufacturer.

Note

The test was conducted using the CMX500 emulator in place of a standard-power access point.

Power Measurement procedure

We tested according to Procedure in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq$ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Add 10 log (1/x), where x is the duty cycle

Note

Both the dual client tests and the proper power adjustment tests used the same power measurement procedure.


8.9. Transmit Power Control, Very Low Power Devices

Limit

Very low-power devices operating in the 5.925–7.125 GHz bands shall employ a TPC mechanism. A very low-power device must demonstrate the capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

Test Configuration

The EUT was connected to CMX 500.

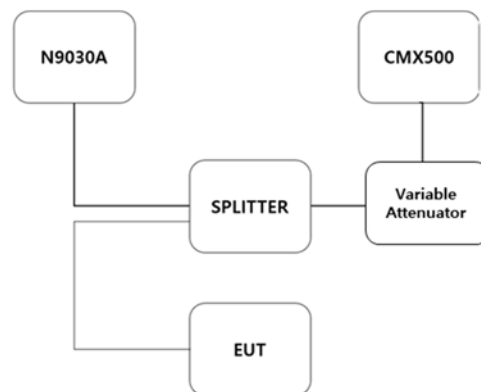

Test Procedure

We tested according to Procedure I in KDB 987594 D02

1. Set up the system according to the test configuration.
2. Connect the EUT to the CMX500 in Very Low Power (VLP) mode.
3. Set the variable attenuator to 10 dB and ensure the environment is free from external noise. Decrease the variable attenuation and measure the spectral density (PSD) at high power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
4. Verify that the PSD power is $\leq -11\text{dBm/MHz}$.
5. Increase the variable attenuation and measure the spectral density (PSD) at low power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
6. Verify that the PSD power is $\leq -5\text{dBm/MHz}$.

Power Measurement procedure

We tested according to Procedure in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. RBW = 1 MHz
3. VBW ≥ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span/RBW}$.
5. Sweep time = auto.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to "free run".
8. Trace average at least 100 traces in power averaging (RMS) mode
9. Add $10 \log (1/x)$, where x is the duty cycle

8.10. Radiated Test


Limit

1. For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.
2. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

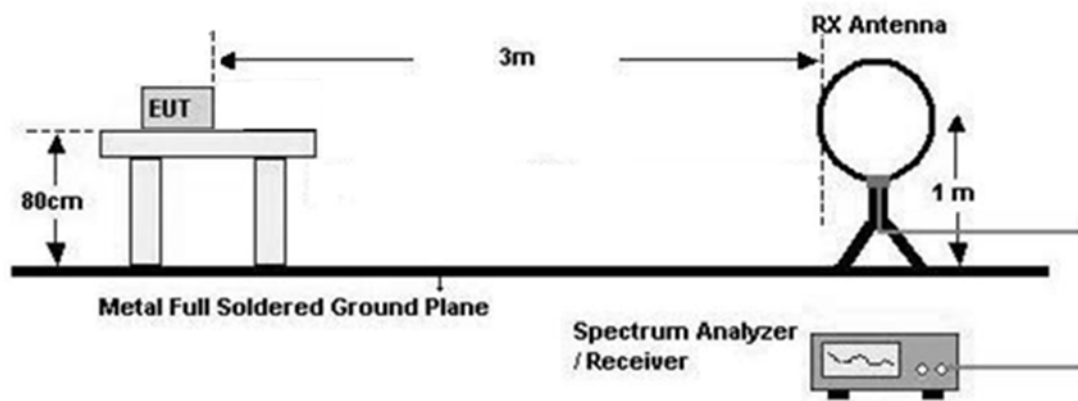

30 MHz - 1 GHz

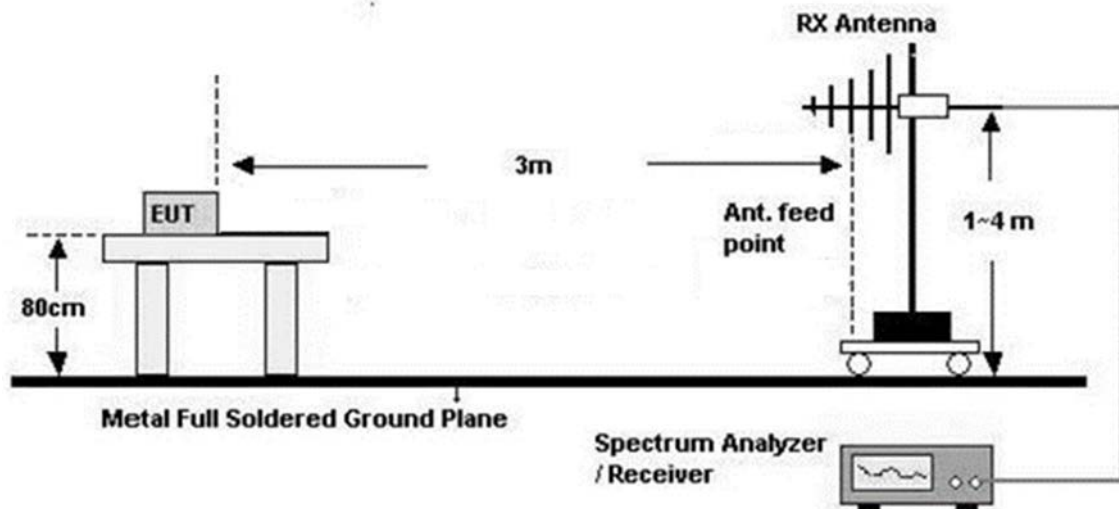

Above 1 GHz

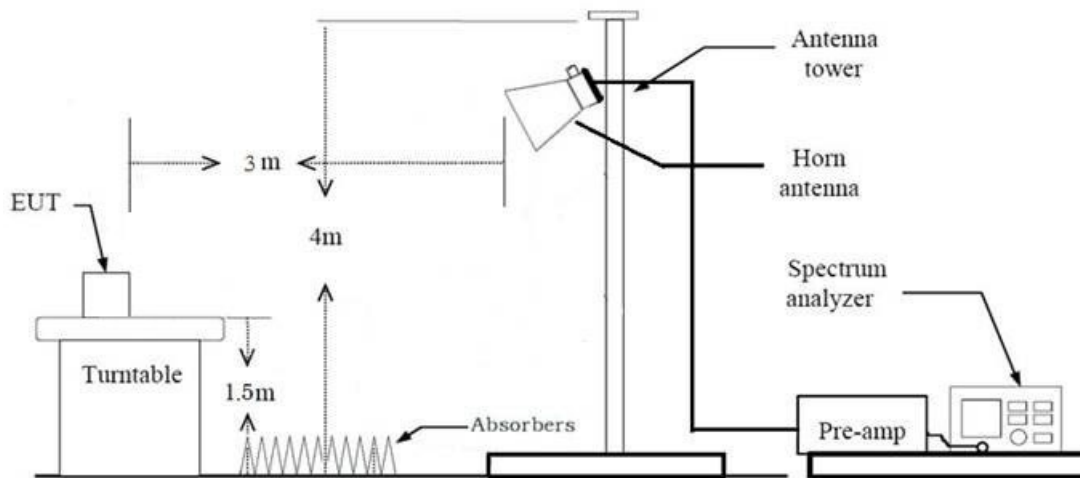

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 100 kHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- Measured Frequency Range : 1 GHz – 40 GHz
- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq$ 98 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq$ 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz

- $VBW \geq 3 \times RBW$
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total(Measurement Type : Peak)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- + Duty Cycle Factor(D.C.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - $VBW \geq 3$ MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = Max Hold
 - Allow sweeps to continue until the trace stabilizes.Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq 98\%$
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz

- $VBW \geq 3 \times RBW$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- $RBW = 1$ MHz
- $VBW \geq 3 \times RBW$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.

9. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

10. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + Attenuator (ATT)

Total(Measurement Type : Average, Duty cycle ≥ 98 %)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + Attenuator (ATT)

Total(Measurement Type : Average, Duty cycle < 98 %)


= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + Attenuator (ATT) + Duty Cycle Factor(D.C.F)

8.11. Frequency Stability

Limit

Maintained within the band

Test Configuration

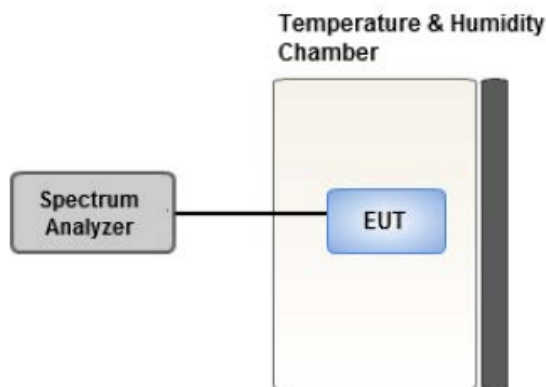

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.12. Test RU offset for Tones

[SRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-
40	26	0~17	0	9	17
	52	37~44	37	41	44
	106	53~56	53	54	56
	242	61~62	61	-	62
	484	65	-	65	-
80	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
160	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
320	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
	4x996	69	-	69	-

[MRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	52+26	70~72	70	71	72
	106+26	82~83	82	-	83
40	52+26	70~75	70	72	75
	106+26	82~85	82	83	85
80	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
160	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
	996+484	94,95, 1094,1095	94	95	1095
	996+484+242	96~99 1096~1099	96	99	1099
320	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
	996+484	94,95, 1094,1095	94	95	1095
	3x996	104,1104, 10104,11104	104	1104	11104
	2x996+484	100,101,1101, 101012,11102,11103	100	1101	11103
	3x996+484	105,106,1106 10105,11105,11106	105	1106	11106

8.13. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
 - EHT20 : MCS 0
 - EHT40 : MCS 0
 - EHT80 : MCS 0
 - EHT160 : MCS 0
 - EHT320 : MCS 0
 - 802.11 a : 6 Mbps
2. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
3. All MRU and channel puncturing combinations were investigated, and the results for each combination were the same. Therefore, I only attached the results for MRU.
4. The combination that only supports channel puncturing is 996+484+242, and the results for this combination have been attached.
5. SC-55F, SCG35 were tested and the worst case results are reported.
(Worst case : SC-55F)

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 - Radiated Spurious Emissions Worst case : Open mode
 - Radiated Restricted Band Edge : Open mode
3. EUT Axis
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : X
4. All data rate of operation were investigated and the worst case results are reported.
(Worst case : MCS0)
5. All Antenna of operation were investigated and the worst case results are reported
 - Mode : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
 - Worstcase : MIMO_CDD(Ant.1+Ant.2)
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported
8. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
9. SC-55F, SCG35 were tested and the worst case results are reported.
(Worst case : SC-55F)

[RSE Worst case]

Standard Client:	UNII 5, 7
Indoor Client	UNII 6, 8

Test		BW (MHz)	Tones (T)	Offset
RSE (Standard Client)	SRU	20	26	4
			242	61
		40	26	9
			484	65
		80	26	19
			996	67
		160	26 (160(80L))	19
			996x2	68
		320	26 (320(80LL))	19
			4x996	69
	MRU	20	52+26	71
			106+26	82
		40	52+26	72
			106+26	83
		80	52+26	75
			484+242 (OFDMA)	91
		160	52+26 (160(80L))	75
			996+484+242 (Non-OFDMA)	99
		320	52+26 (320(80LL))	75
			996x3+484 (OFDMA)	1106
RSE (Indoor Client)	SRU	20	26	4
			242	61
		40	26	9
			484	65
		80	26	19
			996	67
		160	26 (160(80L))	19
			996x2	68
		320	26 (320(80LL))	19
			4x996	69

[Bandedge Worst case]

Standard Client:	UNII 5
Indoor Client	UNII 8

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	SRU	20	26	0	8
			52	37	40
			106	53	54
			242	61	61
			SU	-	-
		40	26	0	17
			52	37	44
			106	53	56
			242	61	62
			484	65	65
			SU	-	-
		80	26	0	36
			52	37	52
			106	53	60
			242	61	64
			484	65	66
			996	67	67
			SU	-	-
		160(80L)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		160(80U)	996	67	-
			2x996	68	-
			SU	-	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
			2x996	-	68
			SU	-	-
		320(80LL)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		320(80HH)	996	67	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
		320(160L)	2x996	68	-
		320(160U)	2x996	-	68
		320	4x996	69	69
			SU	-	-

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	MRU	20	52+26	70	72
			106+26	82	83
		40	52+26	70	75
			106+26	82	85
		80	52+26	70	81
			106+26	82	89
			484+242 (OFDMA)	93	90
		160(80L)	52+26	70	-
			106+26	82	-
			484+242	93	-
		160(80U)	52+26	-	81
			106+26	-	89
			484+242	-	90
		160	996+484 (OFDMA)	1095	94
			996+484+242 (Non-OFDMA)	1099	96
		320(80LL)	52+26	70	-
			106+26	82	-
			484+242	93	-
		320(80HH)	52+26	-	81
			106+26	-	89
			484+242	-	90
		320(160L)	996+484	1095	-
		320(160U)	996+484	-	94
		320	2x996+484 (OFDMA)	1101	10102
			3x996 (OFDMA)	11104	104
			3x996+484 (OFDMA)	11106	105

Radiated test(Simultaneous transmission Scenario)

1. Please refer to the [DTS], [BT], [UNII ax, be]Test Report.
2. SC-55F, SCG35 were tested and the worst case results are reported.
(Worst case : SC-55F)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc) + Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SC-55F, SCG35 were tested and the worst case results are reported.
(Worst case : SC-55F)

9. SUMMARY OF TEST RESULTS & DATA REFERENCING

9.1. Test result

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Maximum transmitter channel bandwidth	§ 15.407(a)(11)	< 320 MHz		PASS (Note ^{2,3})
Output Power Maximum EIRP	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) EIRP < 36 dBm Client(Connected to standard-Power Access Point) EIRP < 30 dBm <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) EIRP < 30 dBm Client (Connected to Low-Power Access Point) EIRP < 24 dBm Very low power devices EIRP < 14 dBm		PASS
Output Power Maximum EIRP Power Spectral Density	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) < 33 dBm/MHz (EIRP) Client(Connected to standard-Power Access Point) < 17 dBm/MHz (EIRP) <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) < 5 dBm/MHz (EIRP) Client (Connected to Low-Power Access Point) < -1 dBm/MHz (EIRP) Very low power devices < -5 dBm/MHz (EIRP)	Conducted	PASS
AC Conducted Emissions 150 kHz-30 MHz	15.407 (b)(9)	<FCC 15.207 limits		PASS
Contention Based Protocol	§ 15.407(d)(6)	Detect co-channel energy with 90 % or greater certainty.		PASS (Note ¹)
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	§ 15.407(a)(7)	The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.		PASS
Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	§ 15.407(a)(7) § 15.407(a)(8)	EIRP < 30 dBm (Standard Power) EIRP < 24 dBm (Low Power Indoor)		PASS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TPC mechanism (VLP Device)	§ 15.407(d)(10)	EIRP PSD < -5 dBm/MHz (at least 6 dB below the maximum EIRP PSD)		PASS
In-Band Emissions (Emissions Mask)	§ 15.407(b)(7)	a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.) b. Suppressed by 28 dB at one channel bandwidth from the channel center. c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.		PASS
Undesirable Emissions	§ 15.407(b) § 15.35(b)	<-27 dBm/MHz EIRP (UNII5, 6, 7, 8)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

Note:

1. Bandwidth Reduction was used for incumbent avoidance.
2. FCC allows 99 % bandwidth measurements for 320 MHz BW mode.
Therefore, 99 % bandwidth was used to demonstrate compliance for channels with a nominal bandwidth of 320 MHz (not less).
3. For channels with a nominal bandwidth less than 320 MHz, compliance is demonstrated by way of the 26 dB bandwidth. For channels with a nominal bandwidth of 320 MHz, compliance is demonstrated by way of the 99 % bandwidth.
4. The decision rule applies 'simple acceptance'

9.2. Data Referencing

Equipment Class	Rule Part	Test item	Data Referencing	Comments
6CD & 6VL (WLAN 6GHz)	§ 15.407(a)(10)	26dB Bandwidth	Y	-
	§ 15.407(a)(10)	99% Bandwidth	Y	-
	§ 15.407(a)(4)	Output Power Maximum EIRP	Y	Spot-check
	§ 15.407(a)(4)	Output Power Maximum EIRP Power Spectral Density	Y	-
	15.407 (b)(9)	AC Conducted Emissions	Y	-
	§ 15.407(d)(6)	Contention Based Protocol	Y	-
	§ 15.407(g) § 2.1055	Frequency Stability	Y	-
	§ 15.407(a)(7)	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	Y	-
	§ 15.407(a)(7) § 15.407(a)(8)	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	Y	-
	§ 15.407(b)(7)	In-Band Emissions (Emissions Mask)	Y	-
	§ 15.407(b) § 15.35(b)	Undesirable Emissions	Y	Spot-check
	15.205, 15.407(b)(9), (10)	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Y	Spot-check
	15.407 (b)(9)	AC Conducted Emissions 150 kHz-30 MHz	Y	Spot-check

Spot-Check Result

1. Data was leveraged from model SM-F766U for the certification of SC-55F.
2. Please refer to the [FCC Evaluation] Report.

10. TEST RESULT

10.1 DUTY CYCLE

10.1.1 802.11 be SRU Duty Cycle

Mode	Tones	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be (EHT20)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.565	4.585	0.996	0.019
	106	MCS0	2.489	2.509	0.992	0.034
	242	MCS0	1.121	1.140	0.983	0.073
802.11be (EHT40)	26	MCS0	4.580	4.595	0.997	0.014
	52	MCS0	4.565	4.585	0.996	0.019
	106	MCS0	2.489	2.509	0.992	0.034
	242	MCS0	1.122	1.140	0.985	0.068
	484	MCS0	0.607	0.625	0.972	0.124
802.11be (EHT80)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.570	4.586	0.996	0.016
	106	MCS0	2.490	2.506	0.994	0.028
	242	MCS0	1.122	1.140	0.985	0.068
	484	MCS0	0.608	0.625	0.973	0.118
	996	MCS0	0.599	0.617	0.971	0.126
802.11be (EHT160)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.570	4.585	0.997	0.014
	106	MCS0	2.490	2.509	0.992	0.033
	242	MCS0	1.123	1.140	0.985	0.067
	484	MCS0	0.608	0.625	0.973	0.118
	996	MCS0	0.600	0.617	0.973	0.120
	2x996	MCS0	0.598	0.614	0.974	0.115
802.11be(EHT320)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.565	4.585	0.996	0.019
	106	MCS0	2.490	2.509	0.992	0.033
	242	MCS0	1.122	1.140	0.985	0.068
	484	MCS0	0.608	0.626	0.972	0.124
	996	MCS0	0.600	0.617	0.973	0.120
	2x996	MCS0	0.597	0.614	0.972	0.124
	4x996	MCS0	0.369	0.404	0.913	0.394
802.11be (SU)	BW 20	MCS0	5.456	5.473	0.997	0.013
	BW 40	MCS0	5.452	5.467	0.997	0.012
	BW 80	MCS0	5.452	5.472	0.996	0.016
	BW 160	MCS0	5.457	5.472	0.997	0.012
	BW 320	MCS0	5.462	5.477	0.997	0.012

10.1.2 802.11 a Duty Cycle

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6 Mbps	1.466	1.564	0.937	0.281

Note: Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = $T_{\text{on}} / T_{\text{total}}$

10.1.3 802.11 be MRU Duty Cycle


Mode	Tones	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be (EHT20)	52+26	MCS0	3.499	3.521	0.994	0.027
	106+26	MCS0	2.030	2.049	0.991	0.040
802.11be (EHT40)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.028	2.046	0.991	0.040
802.11be (EHT80)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.030	2.046	0.992	0.035
	484+242	MCS0	0.814	0.831	0.979	0.090
802.11be (EHT160)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.029	2.047	0.991	0.038
	484+242	MCS0	0.813	0.831	0.978	0.096
	996+484	MCS0	0.786	0.791	0.993	0.029
	996+484+242	MCS0	5.455	5.476	0.996	0.017
802.11be (EHT320)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.028	2.046	0.991	0.040
	484+242	MCS0	0.814	0.831	0.980	0.090
	996+484	MCS0	0.787	0.793	0.993	0.029
	3x996	MCS0	0.423	0.438	0.966	0.150
	2x996+484	MCS0	0.493	0.509	0.969	0.139
	3x996+484	MCS0	0.370	0.386	0.956	0.194

Test Plots


Note: In order to simplify the report, attached plots were only the lowest datarate.

[SRU]


802.11be EHT 20 Ch.2(5935 MHz) 26 Tones MCS0

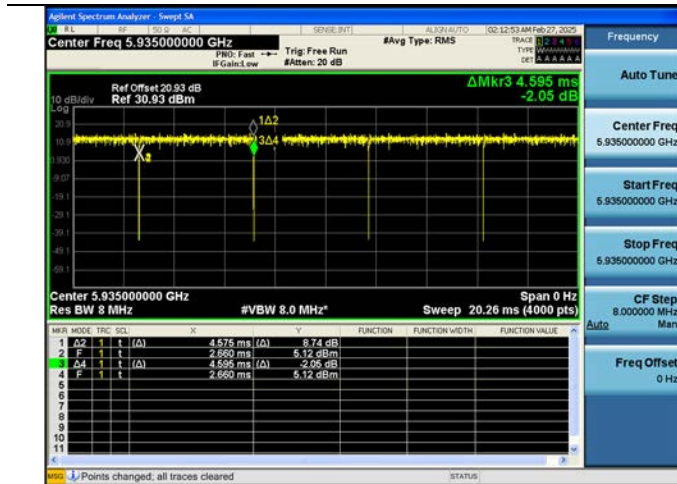


802.11be EHT 20 Ch.2(5935 MHz) SU MCS0

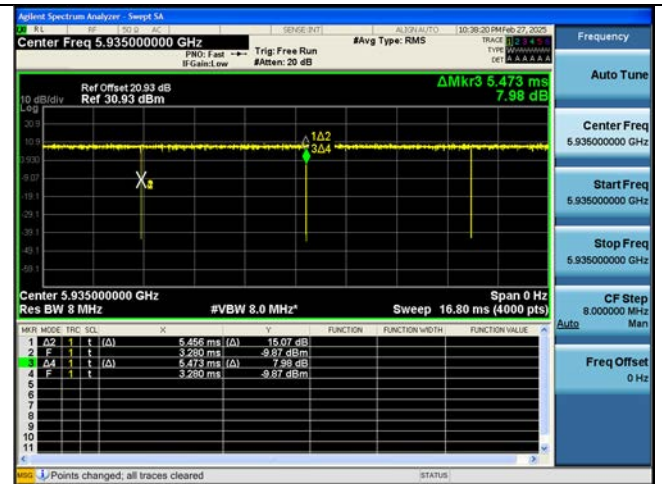


802.11be EHT 40 Ch.3(5965 MHz) 26 Tones MCS0

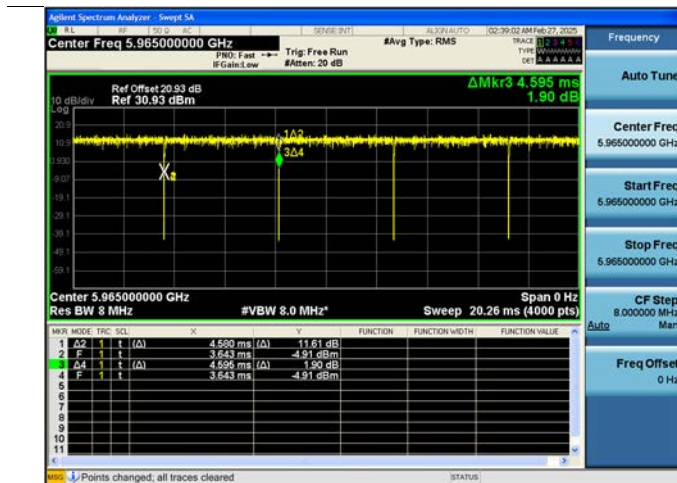


802.11be EHT 40 Ch.3(5965 MHz) SU MCS0

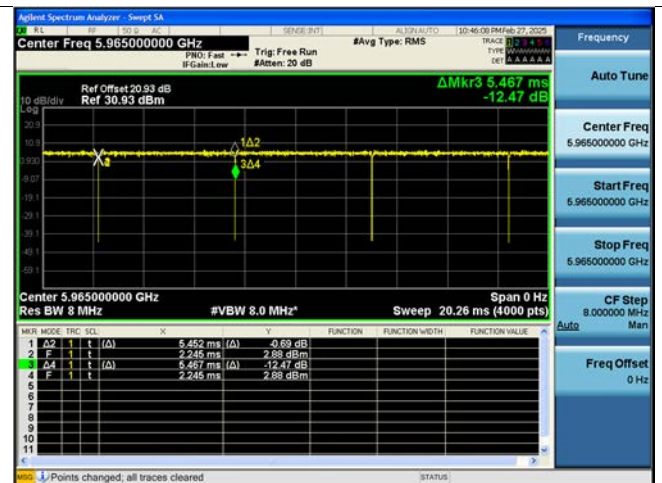


802.11be EHT 80 Ch.7(5985 MHz) 26 Tones MCS0

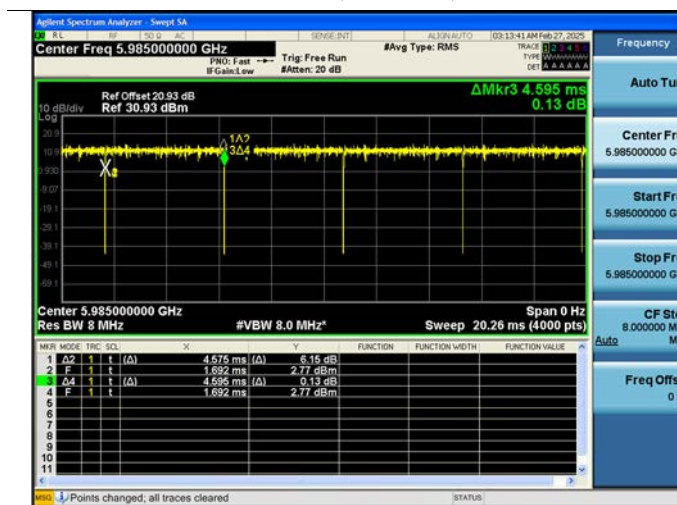


802.11be EHT 80 Ch.7(5985 MHz) SU MCS0

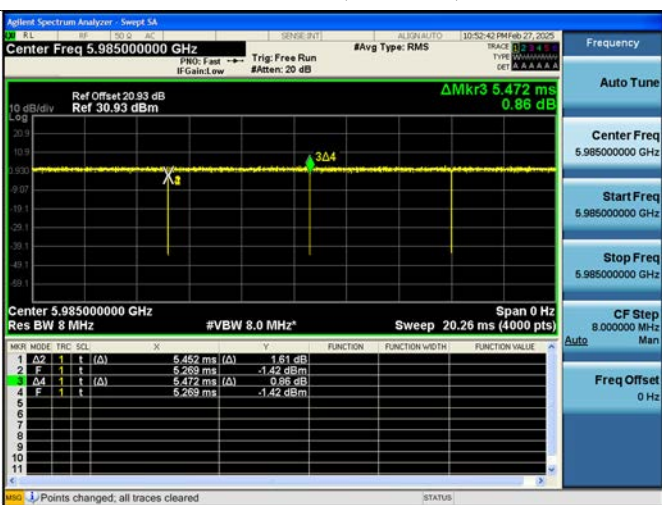


802.11be EHT 160 Ch.15(6025 MHz) 26 Tones MCS0

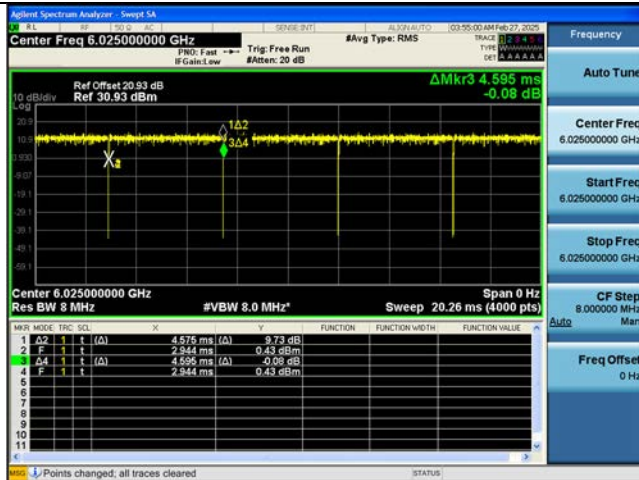


802.11be EHT 160 Ch.15(6025 MHz) 2x996T MCS0

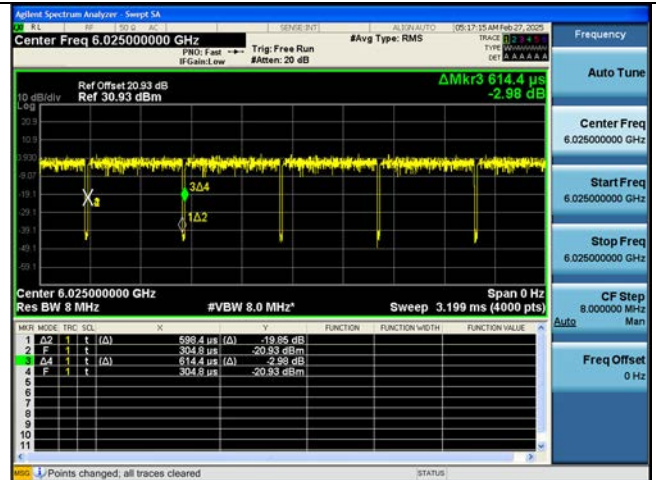


802.11be EHT 160 Ch.15(6025 MHz) SU MCS0

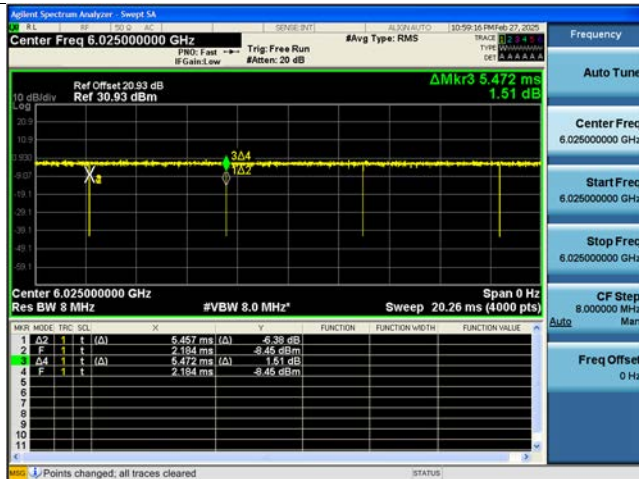


802.11be EHT 320 Ch.127(6585 MHz) 26 Tones MCS0

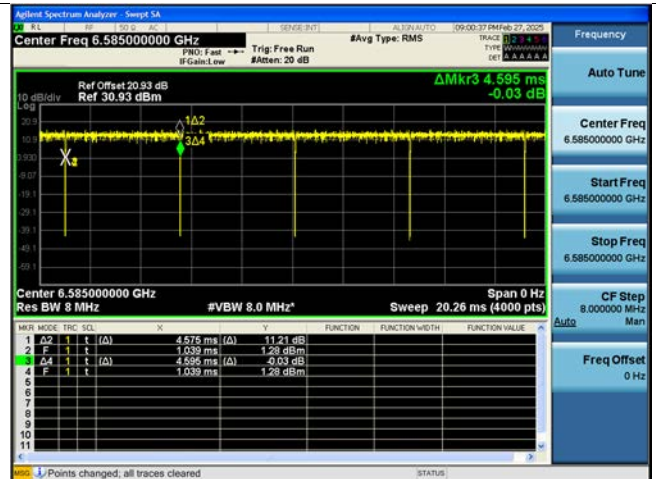

802.11be EHT 320 Ch.127(6585 MHz) 2x996T MCS0


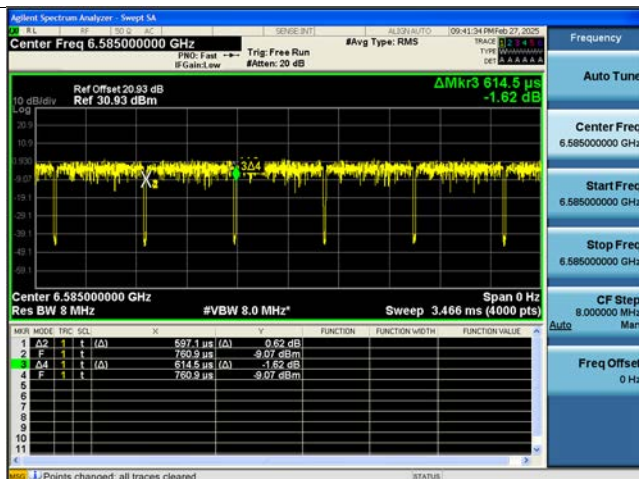


802.11be EHT 320 Ch.31(6105 MHz) 4x996T MCS0

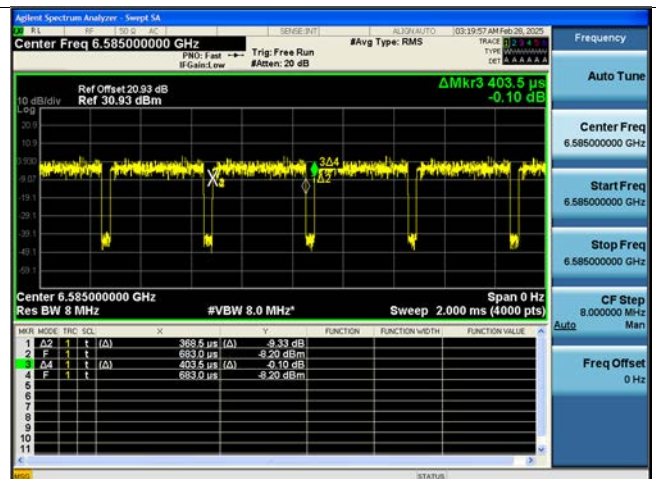

802.11be EHT 320 Ch.127(6585 MHz) SU



802.11a Ch.2(5935 MHz) 6 Mbps

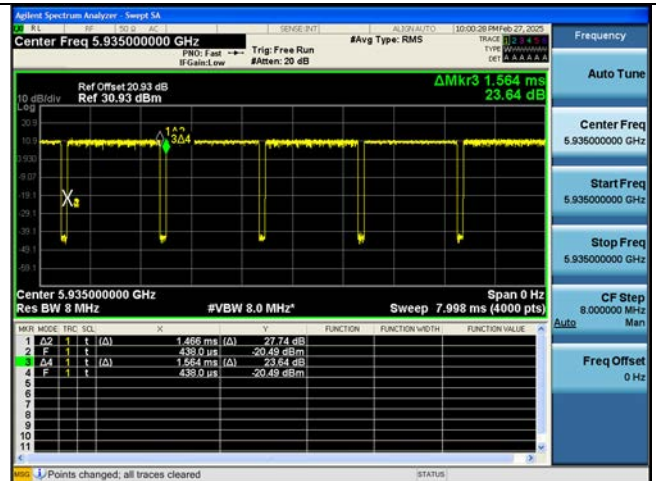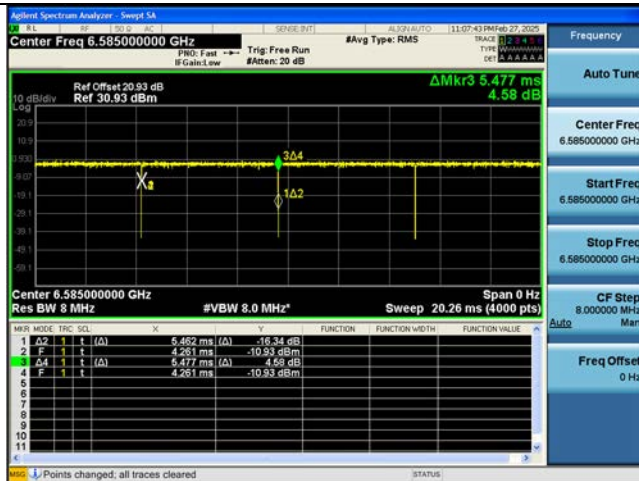

[MRU]



802.11be EHT 20 Ch.2(5935 MHz) 52T + 26T

802.11be EHT 20 Ch.2(5935 MHz) 106T + 26T

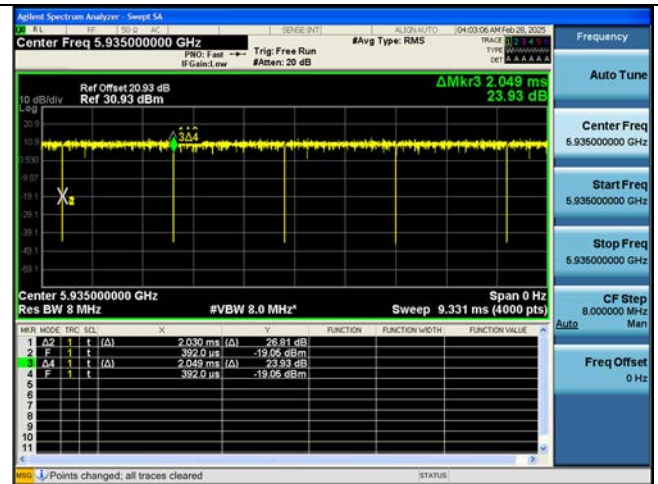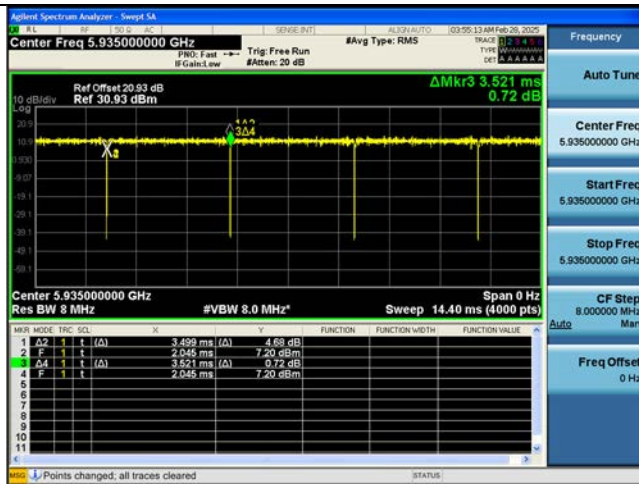



802.11be EHT 40 Ch.3(5965 MHz) 52T + 26T

802.11be EHT 40 Ch.3(5965 MHz) 106T + 26T

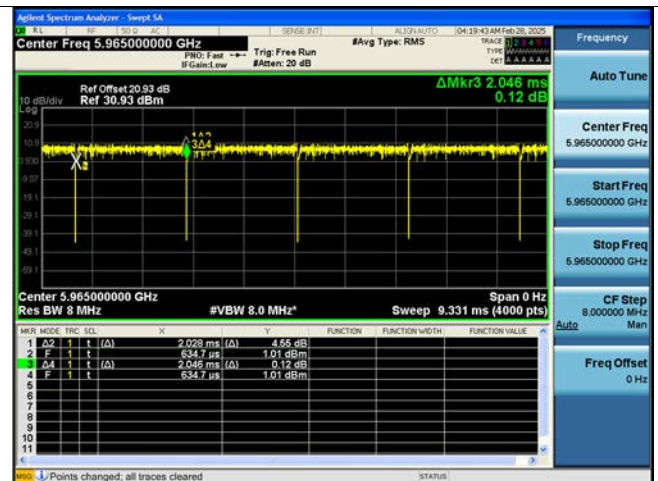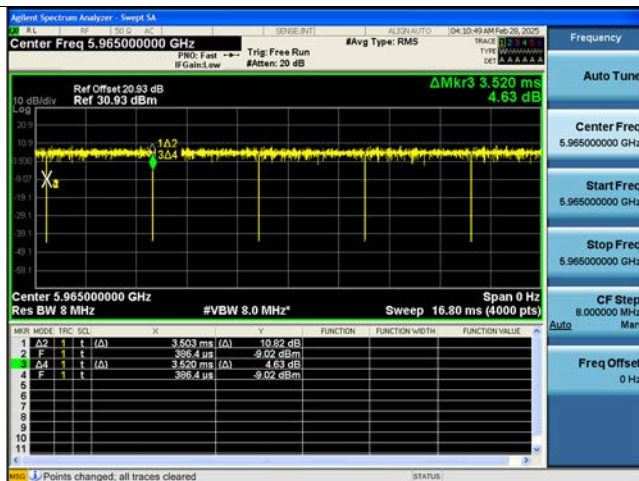


802.11be EHT 80 Ch.7(5985 MHz) 52T + 26T


802.11be EHT 80 Ch.7(5985 MHz) 106T + 26T

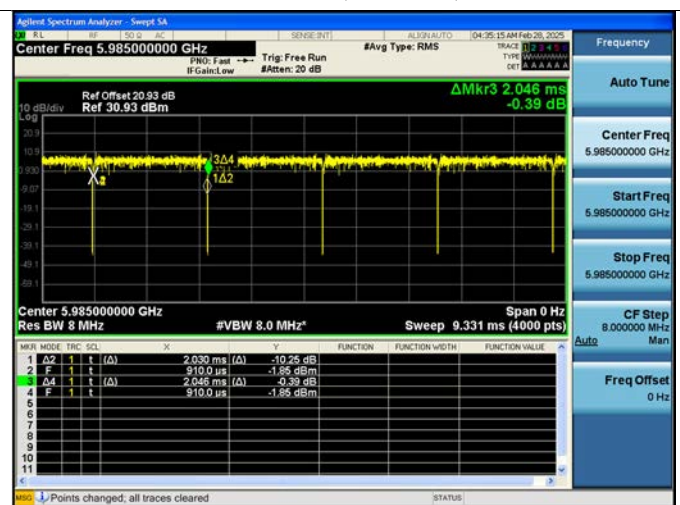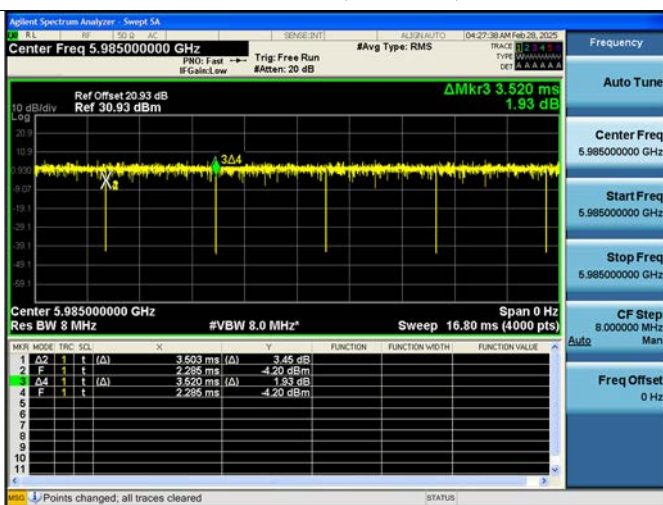


802.11be EHT 80 Ch.7(5985 MHz) 484T + 242T

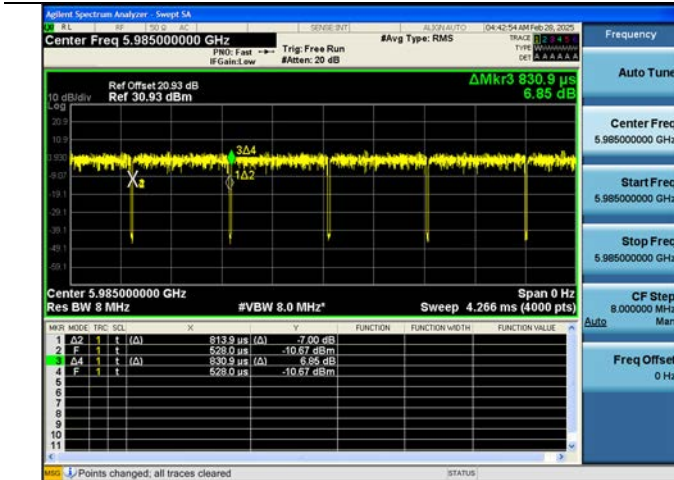


802.11be EHT 160 Ch.15(6025MHz) 52T + 26T

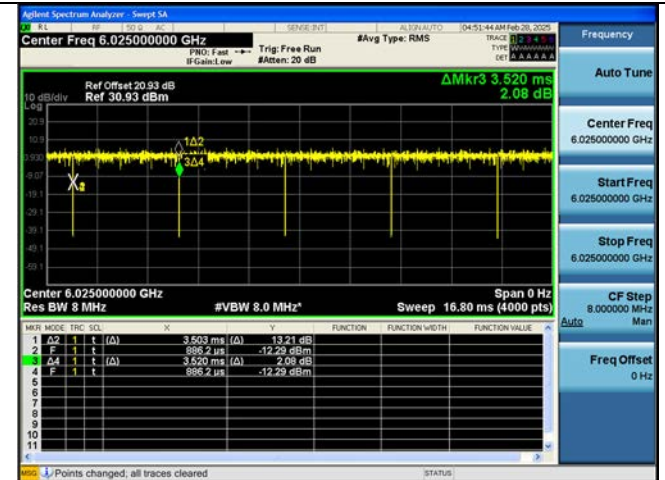


802.11be EHT 160 Ch.15(6025MHz) 106T + 26T

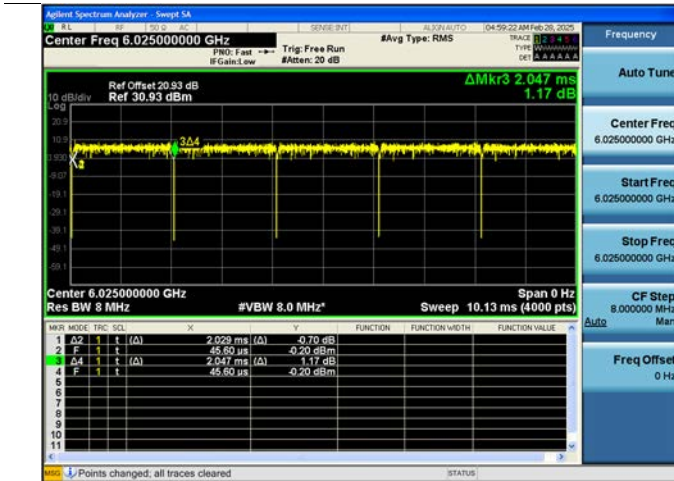


802.11be EHT 160 Ch.15(6025MHz) 484T + 242T

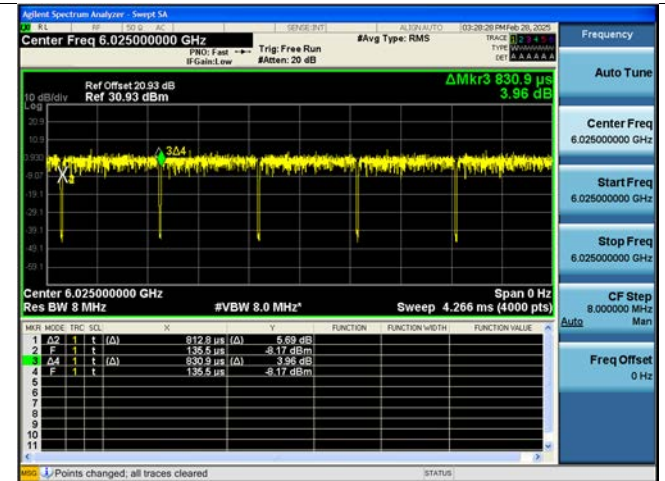

802.11be EHT 160 Ch.15(6025MHz) 996T + 484T


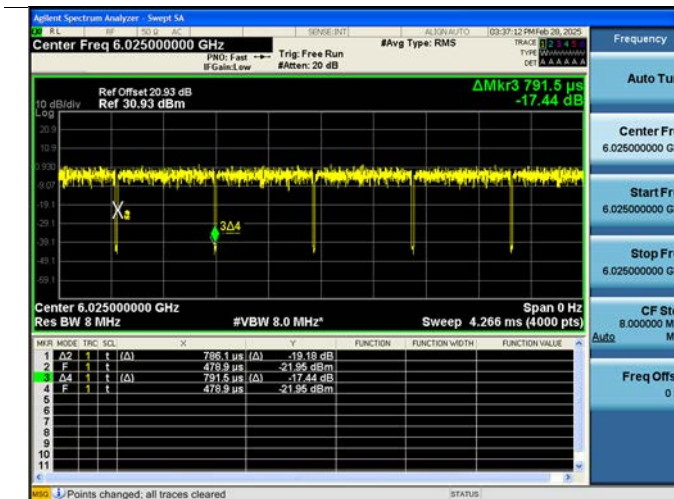


802.11be EHT 160 Ch.15(6025MHz) 996T + 484T + 242T

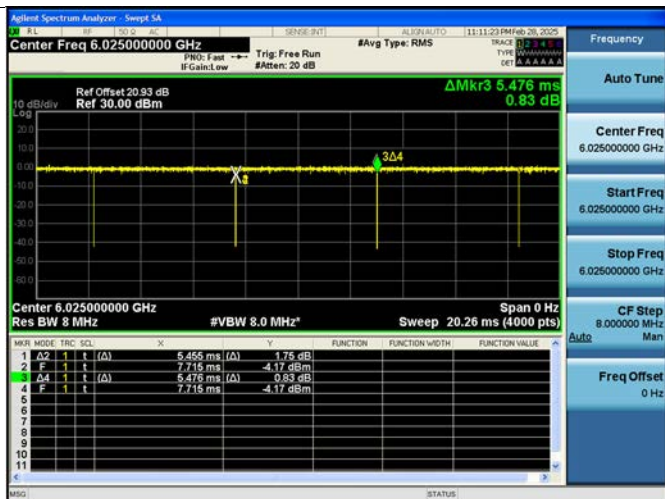



802.11be EHT 320 Ch.31(6105MHz) 52T + 26T

802.11be EHT 320 Ch.31(6105MHz) 106T + 26T

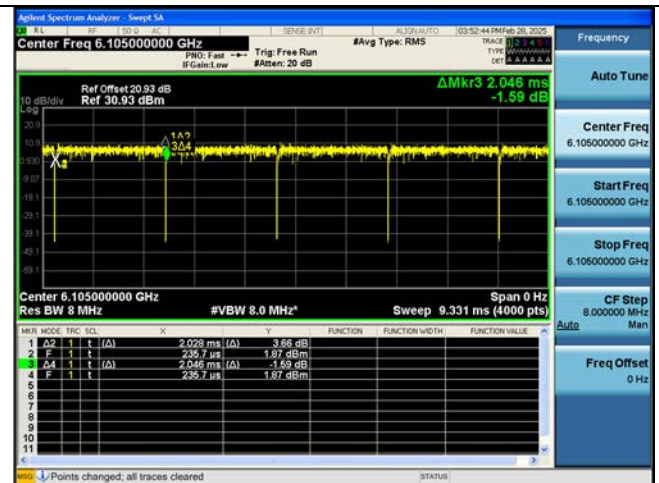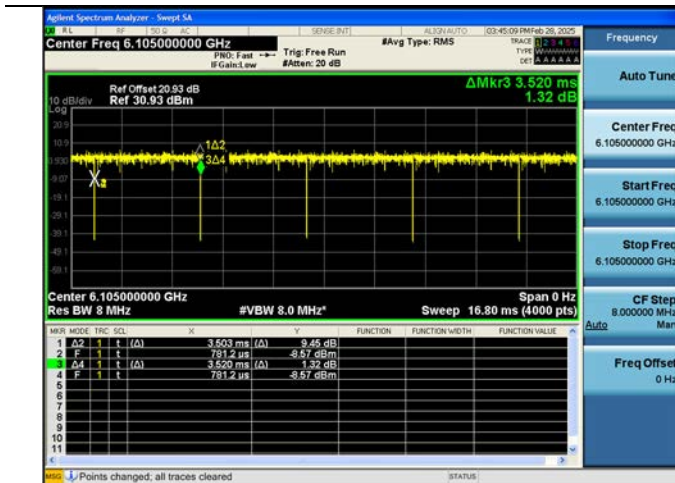



802.11be EHT 320 Ch.31(6105MHz) 484T + 242T

802.11be EHT 320 Ch.31(6105MHz) 996T + 484T

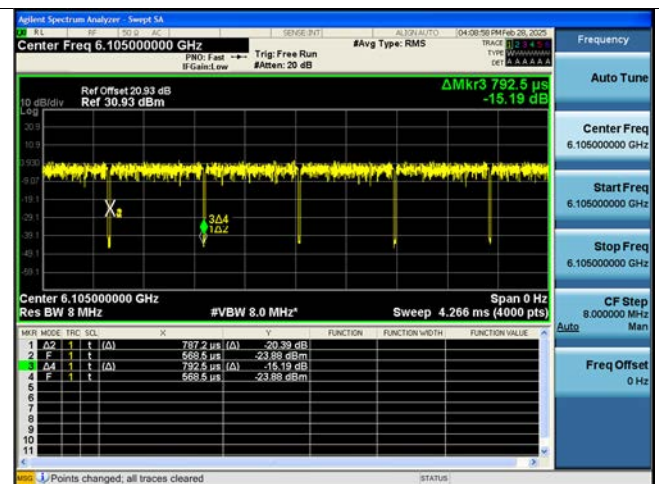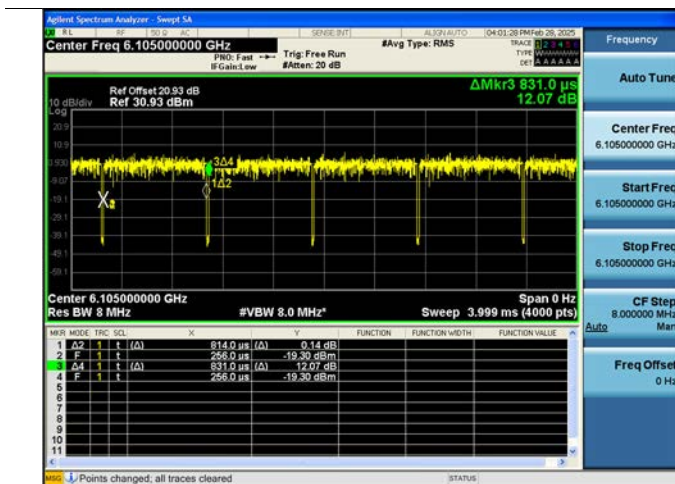


802.11be EHT 320 Ch.31(6105MHz) 3x996T

802.11be EHT 320 Ch.31(6105MHz) 2x996T + 484T

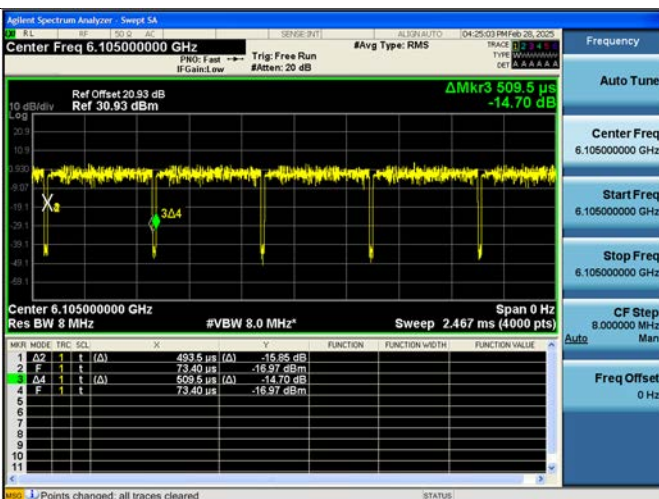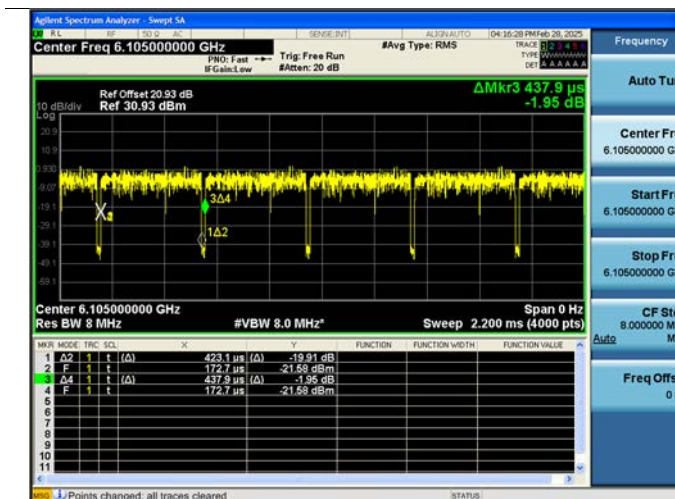

802.11be EHT 320 Ch.31(6105MHz) 3x996T + 484T

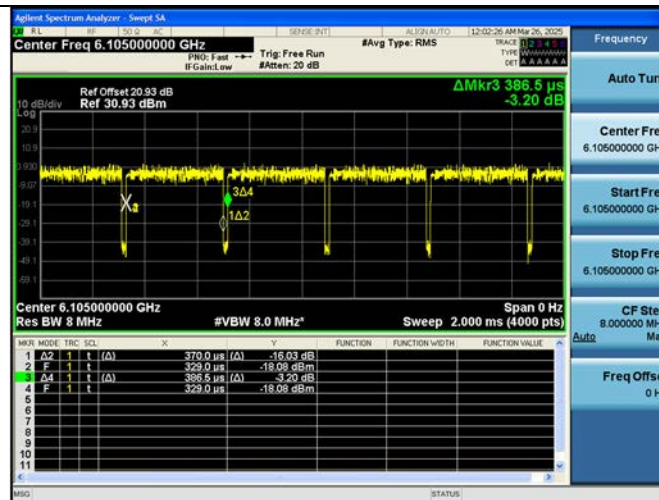

10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH

10.2.1 26 dB BANDWIDTH(Indoor client, Very Low Power Device)

10.2.1.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.49	18.07	19.54	18.274	16.849	18.321
	6175	45	19.38	18.05	19.41	18.319	17.085	18.266
	6415	93	19.41	18.08	19.58	18.260	17.043	18.258
UNII6	6435	97	19.41	18.01	19.61	18.299	16.685	17.774
	6475	105	19.40	17.96	19.51	17.972	16.969	18.272
	6515	113	19.48	18.04	19.51	18.174	17.134	18.141
UNII7	6535	117	19.30	17.94	19.44	17.780	16.535	18.121
	6695	149	19.44	17.97	19.54	18.225	17.037	18.127
	6855	181	19.34	17.99	19.63	17.788	16.983	18.228
UNII8	6875	185	19.49	18.00	19.50	18.111	16.245	18.141
	6995	209	19.41	17.67	19.60	18.131	16.634	18.183
	7115	233	19.41	17.92	19.61	18.238	17.088	18.179

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.54	18.63	19.63	18.156	17.136	17.945
	6175	45	19.75	18.63	19.48	18.167	16.959	18.134
	6415	93	19.60	18.28	19.67	18.150	16.675	18.039
UNII6	6435	97	19.56	18.62	19.61	18.161	16.439	17.642
	6475	105	19.68	18.59	19.49	18.201	17.137	18.001
	6515	113	19.58	18.64	19.72	17.995	16.903	17.875
UNII7	6535	117	19.37	18.22	19.71	17.779	17.037	18.068
	6695	149	19.59	18.21	19.86	18.140	16.846	18.039
	6855	181	19.61	18.51	19.71	18.114	16.868	18.052
UNII8	6875	185	19.67	18.44	19.71	18.155	17.192	18.069
	6995	209	19.64	18.23	19.58	18.196	16.803	18.027
	7115	233	19.68	18.17	19.63	18.182	17.155	18.170

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.65	-	20.18	18.171	-	18.149
	6175	45	19.64	-	20.13	18.212	-	18.173
	6415	93	19.78	-	20.23	18.183	-	18.139
UNII6	6435	97	19.60	-	20.26	18.216	-	18.170
	6475	105	19.68	-	20.18	18.177	-	18.112
	6515	113	19.56	-	19.94	17.945	-	17.926
UNII7	6535	117	19.65	-	20.13	18.234	-	18.156
	6695	149	19.62	-	19.84	18.202	-	18.192
	6855	181	19.59	-	20.26	18.009	-	18.209
UNII8	6875	185	19.67	-	20.18	18.198	-	18.071
	6995	209	19.59	-	20.11	18.156	-	18.193
	7115	233	19.67	-	20.19	18.192	-	18.150

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.05	-	-	19.041	-
	6175	45	-	21.02	-	-	19.030	-
	6415	93	-	21.02	-	-	19.041	-
UNII6	6435	97	-	20.98	-	-	19.041	-
	6475	105	-	21.04	-	-	19.035	-
	6515	113	-	21.02	-	-	19.036	-
UNII7	6535	117	-	21.04	-	-	19.028	-
	6695	149	-	21.07	-	-	19.034	-
	6855	181	-	21.03	-	-	19.041	-
UNII8	6875	185	-	20.99	-	-	19.039	-
	6995	209	-	21.03	-	-	19.031	-
	7115	233	-	21.08	-	-	19.032	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.69	-	-	19.029	-
	6175	45	-	21.41	-	-	19.037	-
	6415	93	-	21.34	-	-	19.025	-
UNII6	6435	97	-	21.47	-	-	19.017	-
	6475	105	-	21.53	-	-	19.038	-
	6515	113	-	21.44	-	-	19.024	-
UNII7	6535	117	-	21.43	-	-	19.043	-
	6695	149	-	21.36	-	-	19.017	-
	6855	181	-	21.44	-	-	19.036	-
UNII8	6875	185	-	21.46	-	-	19.014	-
	6995	209	-	21.55	-	-	19.020	-
	7115	233	-	21.42	-	-	19.076	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.00	21.92	20.69	18.509	19.822	18.583
	6165	43	20.03	22.29	19.56	18.445	20.248	18.015
	6405	91	20.03	21.73	20.54	18.555	20.103	18.502
UNII6	6445	99	20.08	22.13	20.41	18.444	20.590	18.467
	6485	107	19.93	22.06	20.63	18.448	20.095	18.575
	6525	115	20.19	21.81	20.15	18.456	20.126	18.544
UNII7	6565	123	20.10	21.82	20.92	18.444	20.180	18.571
	6685	147	19.85	21.92	20.67	18.322	20.224	18.562
	6845	179	19.60	22.40	20.28	18.111	19.996	18.455
UNII8	6885	187	20.06	22.00	20.42	18.279	20.381	18.535
	7005	211	19.87	21.88	20.30	18.388	20.032	18.533
	7085	227	19.93	21.85	20.69	18.349	20.248	18.628

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.49	22.66	22.01	18.067	19.941	18.437
	6165	43	20.97	22.57	25.46	18.324	19.762	18.399
	6405	91	20.70	22.70	24.28	18.293	19.989	18.473
UNII6	6445	99	21.00	23.09	24.17	18.241	19.961	18.366
	6485	107	20.50	23.36	25.38	18.307	19.883	18.394
	6525	115	20.79	22.81	22.70	18.294	19.967	18.468
UNII7	6565	123	20.44	22.75	24.07	18.146	19.918	18.452
	6685	147	20.99	22.83	24.18	18.143	19.820	18.526
	6845	179	20.79	22.56	22.51	18.139	20.085	18.369
UNII8	6885	187	20.60	22.73	21.65	18.191	19.597	18.286
	7005	211	20.15	23.67	24.14	17.898	19.685	18.392
	7085	227	20.51	22.97	25.55	17.936	19.965	18.368

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	31.30	30.68	26.32	18.095	19.785	18.259
	6165	43	31.50	30.23	27.65	18.133	19.323	18.285
	6405	91	31.21	30.25	27.62	18.097	19.445	18.180
UNII6	6445	99	31.17	23.80	27.74	18.025	19.308	18.204
	6485	107	31.20	23.44	27.46	18.076	19.283	18.121
	6525	115	31.29	30.19	26.45	18.096	19.389	18.162
UNII7	6565	123	21.98	29.95	25.30	18.083	19.329	18.314
	6685	147	22.14	30.74	26.44	18.065	19.413	18.296
	6845	179	31.25	29.26	26.46	17.968	19.314	18.237
UNII8	6885	187	31.27	30.70	26.40	18.113	19.240	18.261
	7005	211	31.14	30.59	27.80	17.932	19.437	18.250
	7085	227	21.92	30.69	27.43	18.077	19.399	18.219

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.97	-	36.03	19.565	-	19.984
	6165	43	34.93	-	35.79	19.436	-	19.968
	6405	91	35.04	-	36.02	19.410	-	20.127
UNII6	6445	99	34.99	-	36.13	19.546	-	20.054
	6485	107	34.82	-	36.17	19.466	-	20.254
	6525	115	34.97	-	36.13	19.465	-	20.269
UNII7	6565	123	34.94	-	36.39	19.508	-	20.134
	6685	147	34.97	-	36.14	19.407	-	19.928
	6845	179	34.70	-	36.05	19.482	-	20.536
UNII8	6885	187	34.93	-	36.20	19.447	-	20.062
	7005	211	34.86	-	36.28	19.500	-	19.999
	7085	227	34.74	-	36.49	19.502	-	20.025

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.68	-	-	38.021	-
	6165	43	-	41.76	-	-	37.946	-
	6405	91	-	41.91	-	-	38.012	-
UNII6	6445	99	-	42.17	-	-	38.030	-
	6485	107	-	41.51	-	-	37.989	-
	6525	115	-	41.58	-	-	37.938	-
UNII7	6565	123	-	41.74	-	-	37.985	-
	6685	147	-	41.74	-	-	38.006	-
	6845	179	-	41.51	-	-	37.977	-
UNII8	6885	187	-	41.57	-	-	37.978	-
	7005	211	-	41.56	-	-	38.004	-
	7085	227	-	41.68	-	-	37.998	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.54	-	-	37.980	-
	6165	43	-	42.42	-	-	37.972	-
	6405	91	-	42.73	-	-	37.995	-
UNII6	6445	99	-	42.72	-	-	38.010	-
	6485	107	-	42.25	-	-	37.939	-
	6525	115	-	42.70	-	-	37.976	-
UNII7	6565	123	-	42.41	-	-	37.987	-
	6685	147	-	42.35	-	-	38.013	-
	6845	179	-	42.12	-	-	38.002	-
UNII8	6885	187	-	42.39	-	-	37.959	-
	7005	211	-	42.17	-	-	37.979	-
	7085	227	-	42.47	-	-	37.956	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	23.46	25.24	23.82	20.540	21.937	20.305
	6145	39	24.70	26.19	25.18	20.592	22.937	21.213
	6385	87	21.88	23.47	25.90	20.252	21.946	20.724
UNII6	6465	103	24.33	25.18	24.35	20.144	21.958	21.233
	6545	119	24.51	27.93	23.87	20.052	22.710	20.692
UNII7	6625	135	24.05	26.17	22.78	19.660	22.328	20.382
	6705	151	25.49	25.12	23.17	20.904	22.672	20.723
	6785	167	25.06	26.54	24.56	20.371	21.955	21.363
UNII8	6865	183	25.16	26.30	25.80	20.529	21.898	20.894
	6945	199	24.06	24.60	22.28	20.060	22.075	20.267
	7025	215	24.49	26.25	24.85	20.033	22.213	20.335

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	25.75	31.25	26.91	19.980	22.533	20.840
	6145	39	26.49	31.93	26.11	20.256	22.483	20.430
	6385	87	25.63	29.16	26.87	20.591	22.186	21.086
UNII6	6465	103	26.60	29.54	27.54	20.198	23.283	19.502
	6545	119	26.05	34.25	28.06	19.868	23.788	21.324
UNII7	6625	135	27.90	30.52	27.74	20.389	22.720	20.852
	6705	151	27.84	33.23	28.91	20.776	22.612	20.674
	6785	167	26.27	31.47	28.31	20.119	23.474	20.811
UNII8	6865	183	26.90	30.58	28.91	19.928	22.528	21.286
	6945	199	26.79	31.65	27.65	20.180	22.898	21.430
	7025	215	28.83	28.90	26.58	20.400	22.912	20.239

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.94	33.06	28.45	20.216	22.573	20.382
	6145	39	28.90	34.13	28.82	20.593	21.431	20.375
	6385	87	27.88	34.29	28.23	19.454	22.118	20.660
UNII6	6465	103	29.10	35.74	29.23	20.054	22.478	21.081
	6545	119	28.79	34.62	27.46	19.731	20.873	20.078
UNII7	6625	135	29.01	34.35	29.68	19.536	21.468	20.441
	6705	151	29.26	34.73	29.77	20.027	22.274	21.088
	6785	167	29.81	33.81	29.33	20.129	21.184	20.870
UNII8	6865	183	27.99	33.82	27.88	19.309	22.219	19.902
	6945	199	28.91	29.72	29.13	19.808	21.109	20.169
	7025	215	28.26	33.62	30.15	20.017	21.738	20.173

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	32.74	36.50	31.99	22.580	23.958	22.891
	6145	39	31.46	36.39	31.03	22.451	24.000	22.638
	6385	87	32.84	34.87	31.34	22.781	23.179	22.947
UNII6	6465	103	33.86	34.55	31.71	23.012	23.267	22.921
	6545	119	32.92	35.21	31.82	22.479	23.285	22.980
UNII7	6625	135	32.59	35.50	32.22	22.326	23.389	22.596
	6705	151	32.83	38.93	32.49	22.270	24.957	22.709
	6785	167	32.11	36.71	32.34	22.671	23.342	22.423
UNII8	6865	183	32.47	34.24	32.08	22.551	22.380	22.502
	6945	199	32.72	34.78	31.57	22.360	22.405	22.696
	7025	215	32.46	36.32	34.44	22.480	23.425	23.397

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.74	-	72.84	54.829	-	44.525
	6145	39	69.82	-	72.45	54.810	-	44.206
	6385	87	69.36	-	73.37	54.460	-	44.565
UNII6	6465	103	69.41	-	72.75	54.533	-	44.180
	6545	119	69.37	-	72.87	54.806	-	44.657
UNII7	6625	135	69.53	-	73.15	54.426	-	45.113
	6705	151	69.70	-	72.57	54.757	-	43.801
	6785	167	69.74	-	73.04	54.780	-	44.905
UNII8	6865	183	69.58	-	73.16	54.401	-	44.350
	6945	199	69.53	-	73.13	54.422	-	45.314
	7025	215	69.31	-	72.82	54.137	-	44.704

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.94	-	-	77.726	-
	6145	39	-	87.28	-	-	77.763	-
	6385	87	-	88.30	-	-	77.725	-
UNII6	6465	103	-	87.47	-	-	77.696	-
	6545	119	-	87.57	-	-	77.722	-
UNII7	6625	135	-	86.78	-	-	77.730	-
	6705	151	-	88.57	-	-	77.769	-
	6785	167	-	88.30	-	-	77.739	-
UNII8	6865	183	-	87.24	-	-	77.728	-
	6945	199	-	87.66	-	-	77.725	-
	7025	215	-	87.71	-	-	77.740	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.16	-	-	77.703	-
	6145	39	-	87.77	-	-	77.737	-
	6385	87	-	87.06	-	-	77.791	-
UNII6	6465	103	-	89.11	-	-	77.741	-
	6545	119	-	87.88	-	-	77.886	-
UNII7	6625	135	-	87.55	-	-	77.854	-
	6705	151	-	87.29	-	-	77.838	-
	6785	167	-	88.75	-	-	77.840	-
UNII8	6865	183	-	86.97	-	-	77.843	-
	6945	199	-	89.51	-	-	77.752	-
	7025	215	-	86.91	-	-	77.826	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	23.99	28.67	27.93	26.341	26.901	27.124
	6185	47	29.43	27.83	30.13	29.860	26.513	28.473
	6345	79	26.17	27.62	28.77	25.457	25.256	28.689
UNII6	6505	111	25.20	29.97	29.08	23.033	25.250	27.139
UNII7	6665	143	26.92	29.94	27.46	24.423	26.335	26.769
UNII8	6825	175	25.51	25.58	29.29	22.676	25.154	27.399
	6985	207	23.79	25.72	30.67	21.828	25.077	28.845

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	29.22	32.95	30.95	23.690	28.268	28.038
	6185	47	29.83	36.26	32.59	24.279	26.435	28.826
	6345	79	27.62	31.70	31.84	22.311	24.898	27.984
UNII6	6505	111	29.08	30.88	35.04	23.953	26.373	28.168
UNII7	6665	143	28.77	33.13	33.22	23.876	26.341	28.852
UNII8	6825	175	30.04	33.12	32.00	23.949	27.386	28.537
	6985	207	28.74	34.45	31.71	23.619	25.407	28.590

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	36.53	39.12	37.29	26.445	26.565	26.966
	6185	47	35.12	37.35	35.49	25.577	25.471	24.744
	6345	79	32.74	37.82	33.69	24.215	26.289	25.658
UNII6	6505	111	32.93	37.58	34.08	23.529	25.187	25.358
UNII7	6665	143	33.97	37.18	37.15	26.107	26.796	25.195
UNII8	6825	175	38.62	38.50	36.06	26.584	27.273	25.444
	6985	207	33.92	36.30	34.97	22.901	28.010	25.107

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	45.03	45.45	43.16	30.528	29.006	28.122
	6185	47	48.12	50.05	44.22	32.380	31.424	28.858
	6345	79	40.75	45.83	44.30	30.498	28.526	28.226
UNII6	6505	111	44.17	47.82	45.40	30.728	29.485	28.038
UNII7	6665	143	42.83	45.18	44.41	29.862	28.975	26.682
UNII8	6825	175	44.31	49.99	43.04	30.253	29.497	26.759
	6985	207	45.19	45.98	44.46	29.789	28.641	26.703

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	72.06	-	110.2	46.676	-	52.276
	6185	47	70.00	-	110.2	47.569	-	51.385
	6345	79	70.90	-	104.8	46.528	-	52.111
UNII6	6505	111	67.75	-	71.55	46.156	-	51.430
UNII7	6665	143	70.22	-	106.3	46.691	-	51.357
UNII8	6825	175	70.41	-	109.0	46.140	-	51.627
	6985	207	70.95	-	106.4	44.338	-	51.400

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	142.4	-	-	81.734	-
	6185	47	-	142.0	-	-	81.521	-
	6345	79	-	139.6	-	-	80.597	-
UNII6	6505	111	-	144.3	-	-	81.438	-
UNII7	6665	143	-	139.4	-	-	81.131	-
UNII8	6825	175	-	142.4	-	-	80.903	-
	6985	207	-	142.5	-	-	80.740	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	28.40	20.49	26.69	28.302	24.106	26.345
	6185	47	27.60	31.80	25.39	27.554	32.564	25.830
	6345	79	24.78	26.75	25.33	24.591	31.147	23.627
UNII6	6505	111	25.86	27.60	27.61	26.287	28.220	24.324
UNII7	6665	143	25.69	28.74	25.02	26.156	30.277	24.747
UNII8	6825	175	26.35	28.51	27.82	25.865	29.883	23.428
	6985	207	26.17	26.91	29.66	26.660	29.481	26.783

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	34.43	38.16	30.98	28.117	30.196	26.459
	6185	47	32.70	34.87	28.90	25.890	30.002	25.041
	6345	79	34.42	36.42	29.33	26.574	29.542	25.855
UNII6	6505	111	35.88	35.96	29.84	28.804	30.260	24.294
UNII7	6665	143	35.96	37.02	29.65	25.881	31.854	25.884
UNII8	6825	175	34.18	33.63	29.10	25.646	26.812	25.789
	6985	207	31.77	37.53	29.73	27.616	29.036	23.908

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	36.66	40.72	33.75	26.430	28.524	24.531
	6185	47	35.78	37.81	34.57	26.655	28.256	24.257
	6345	79	38.49	36.85	33.07	27.591	27.945	24.824
UNII6	6505	111	37.85	39.98	34.65	27.346	29.423	25.028
UNII7	6665	143	37.55	41.74	32.93	27.067	29.573	24.724
UNII8	6825	175	38.87	44.48	32.28	26.479	29.985	23.552
	6985	207	37.43	40.71	34.59	26.962	30.275	24.233

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	48.20	50.52	41.50	33.429	29.780	28.920
	6185	47	46.57	51.43	40.49	31.944	31.185	27.226
	6345	79	48.76	48.52	40.90	33.036	30.448	28.013
UNII6	6505	111	48.69	49.69	41.52	34.351	30.000	28.427
UNII7	6665	143	48.14	51.36	51.61	33.042	31.097	33.554
UNII8	6825	175	50.31	47.02	42.67	32.882	31.923	30.085
	6985	207	54.11	50.13	40.57	35.948	31.168	29.712

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	101.6	-	73.45	62.813	-	50.770
	6185	47	97.59	-	74.06	59.171	-	50.084
	6345	79	95.43	-	72.09	61.820	-	51.386
UNII6	6505	111	105.3	-	72.92	61.514	-	51.155
UNII7	6665	143	103.0	-	73.11	57.627	-	51.761
UNII8	6825	175	96.54	-	78.31	62.470	-	51.237
	6985	207	101.3	-	75.64	60.776	-	51.956

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	132.4	-	-	80.545	-
	6185	47	-	129.9	-	-	81.229	-
	6345	79	-	131.7	-	-	81.495	-
UNII6	6505	111	-	134.2	-	-	81.582	-
UNII7	6665	143	-	134.1	-	-	83.120	-
UNII8	6825	175	-	135.1	-	-	82.199	-
	6985	207	-	135.8	-	-	81.889	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	176.4	-	-	157.48	-
	6185	47	-	172.3	-	-	157.30	-
	6345	79	-	172.8	-	-	157.28	-
UNII6	6505	111	-	176.2	-	-	157.13	-
UNII7	6665	143	-	173.7	-	-	157.03	-
UNII8	6825	175	-	174.7	-	-	157.18	-
	6985	207	-	174.9	-	-	157.27	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	174.8	-	-	157.07	-
	6185	47	-	172.9	-	-	157.16	-
	6345	79	-	172.1	-	-	156.97	-
UNII6	6505	111	-	172.4	-	-	157.15	-
UNII7	6665	143	-	171.8	-	-	157.08	-
UNII8	6825	175	-	171.6	-	-	157.09	-
	6985	207	-	174.0	-	-	157.00	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	170.4	31.56	101.4	167.61	70.949	95.235
	6265	63	169.0	135.1	104.0	165.02	64.807	51.483
UNII6	6425	95	170.3	36.34	34.39	162.10	69.518	57.561
	6585	127	170.6	137.3	103.2	165.64	46.762	52.922
UNII8	6745	159	170.5	129.1	101.5	63.519	50.347	50.094
	6905	191	162.7	131.0	107.6	77.114	47.129	57.106

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	36.43	45.03	109.8	47.495	43.073	49.754
	6265	63	32.78	45.95	95.45	40.065	46.603	53.440
UNII6	6425	95	34.85	38.27	40.33	37.824	42.159	45.462
	6585	127	31.15	41.25	105.4	42.434	41.020	99.330
UNII8	6745	159	37.05	34.31	42.89	44.905	33.933	47.069
	6905	191	38.53	42.75	105.5	40.117	39.844	62.017

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	169.0	133.4	50.25	80.271	65.395	46.340
	6265	63	171.6	142.1	110.7	99.947	128.22	51.820
UNII6	6425	95	167.9	134.9	111.3	49.835	127.69	43.565
	6585	127	169.7	136.8	115.1	62.809	97.993	45.586
UNII8	6745	159	170.6	135.7	113.7	85.650	66.308	43.382
	6905	191	168.4	144.6	110.5	62.796	131.94	38.351

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	172.8	165.4	135.5	162.81	146.77	112.99
	6265	63	174.0	164.3	131.2	161.68	149.32	111.78
UNII6	6425	95	172.1	165.8	130.3	161.69	147.52	111.21
	6585	127	173.4	163.4	135.9	163.16	150.31	113.56
UNII8	6745	159	175.1	165.2	130.6	161.73	149.93	114.28
	6905	191	169.7	163.4	133.8	72.022	149.13	113.66

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	178.1		154.5	163.22		130.29
	6265	63	179.8		155.2	164.71		128.31
UNII6	6425	95	178.8		151.2	162.98		129.27
	6585	127	177.6		152.9	162.27		127.46
UNII8	6745	159	179.9		149.5	163.48		130.57
	6905	191	177.9		155.5	162.02		130.00

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31		171.2			121.03	
	6265	63		173.8			129.70	
UNII6	6425	95		170.7			117.11	
	6585	127		172.0			118.80	
UNII8	6745	159		172.6			113.14	
	6905	191		171.7			108.85	

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	90.38	34.20	35.31	93.270	50.049	61.216
	6265	63	94.23	34.20	36.45	90.296	41.609	42.035
UNII6	6425	95	96.33	49.16	38.82	92.776	54.541	50.139
	6585	127	93.55	58.05	43.84	92.502	54.503	42.736
UNII8	6745	159	35.40	56.68	37.11	41.100	59.190	42.287
	6905	191	94.37	54.76	40.90	93.763	50.140	45.694

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	48.09	43.21	44.14	41.742	44.422	43.373
	6265	63	48.53	44.44	43.26	43.318	47.838	43.101
UNII6	6425	95	51.59	43.56	46.74	45.157	43.435	47.025
	6585	127	41.67	45.73	43.19	41.153	44.585	43.815
UNII8	6745	159	42.43	46.50	44.71	42.468	44.165	46.023
	6905	191	48.32	41.80	41.02	41.910	45.322	43.026

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	105.6	65.33	44.48	75.817	53.716	39.215
	6265	63	102.8	64.80	45.31	47.697	57.894	37.870
UNII6	6425	95	100.2	65.43	50.14	63.909	51.770	41.629
	6585	127	102.9	67.98	49.14	48.441	56.059	40.652
UNII8	6745	159	98.64	68.24	46.78	52.504	57.431	37.980
	6905	191	102.9	66.01	50.66	55.320	57.388	41.970

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	114.4	87.93	59.93	93.000	68.475	42.134
	6265	63	103.7	90.21	61.05	89.092	72.230	40.996
UNII6	6425	95	113.7	90.29	63.35	95.136	71.198	44.258
	6585	127	112.4	87.79	68.26	89.300	73.006	47.239
UNII8	6745	159	111.4	90.46	58.38	94.091	72.200	45.710
	6905	191	114.2	87.38	62.50	94.564	69.588	42.277

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	127.1		155.3	103.54		100.93
	6265	63	124.2		152.7	99.550		98.910
UNII6	6425	95	127.0		150.9	102.54		99.536
	6585	127	117.0		152.9	100.02		96.512
UNII8	6745	159	126.2		156.7	102.72		99.411
	6905	191	124.3		151.2	102.21		96.547

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31		177.5			113.13	
	6265	63		176.7			111.82	
UNII6	6425	95		170.5			107.94	
	6585	127		179.2			109.99	
UNII8	6745	159		174.9			106.29	
	6905	191		176.1			106.99	

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	34.43	63.29	95.79	44.779	55.452	82.945
	6265	63	41.33	42.72	38.28	40.566	47.224	52.417
UNII6	6425	95	40.00	65.19	93.98	53.334	63.762	102.14
	6585	127	40.62	63.77	95.15	43.486	44.258	59.900
UNII8	6745	159	34.90	33.19	91.43	41.259	40.952	55.742
	6905	191	36.07	38.50	41.21	40.852	47.572	47.676

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.18	50.77	93.83	43.961	45.965	91.521
	6265	63	45.76	51.32	97.66	45.742	44.758	49.750
UNII6	6425	95	47.64	47.03	95.98	43.955	42.199	92.785
	6585	127	49.77	43.45	99.21	45.753	50.832	94.493
UNII8	6745	159	48.39	55.47	36.62	43.239	47.086	43.425
	6905	191	45.41	42.15	94.26	43.826	45.100	93.798

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	61.54	73.91	97.64	46.784	62.693	44.004
	6265	63	54.12	71.98	95.94	43.788	64.206	43.895
UNII6	6425	95	45.35	63.55	98.34	38.782	42.192	49.469
	6585	127	46.03	75.56	94.25	43.431	64.282	45.149
UNII8	6745	159	50.06	74.95	93.45	43.638	48.590	44.741
	6905	191	56.08	68.79	99.14	43.866	60.363	48.208

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	82.12	66.43	110.2	55.196	54.736	91.916
	6265	63	81.44	70.74	107.1	53.984	53.732	92.977
UNII6	6425	95	78.82	65.63	104.2	53.613	52.216	93.244
	6585	127	79.64	74.99	107.4	52.879	51.217	91.710
UNII8	6745	159	67.78	69.38	106.4	45.864	54.923	90.666
	6905	191	76.90	70.65	106.6	53.455	53.460	92.443

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	102.5	-	107.0	76.340	-	93.368
	6265	63	99.30	-	108.0	73.854	-	95.128
UNII6	6425	95	103.8	-	106.3	75.464	-	93.147
	6585	127	96.53	-	107.1	77.223	-	92.118
UNII8	6745	159	100.8	-	106.3	76.825	-	92.848
	6905	191	99.19	-	107.1	74.195	-	95.247

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.7	-	-	98.257	-
	6265	63	-	186.6	-	-	97.994	-
UNII6	6425	95	-	187.0	-	-	98.883	-
	6585	127	-	173.0	-	-	98.893	-
UNII8	6745	159	-	174.9	-	-	97.929	-
	6905	191	-	174.8	-	-	100.45	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	107.5	39.10	166.1	104.79	82.485	89.107
	6265	63	32.63	143.3	30.84	41.521	52.114	46.397
UNII6	6425	95	105.4	149.7	168.2	107.42	141.94	166.22
	6585	127	107.1	39.47	166.3	102.61	52.154	130.62
UNII8	6745	159	104.4	32.27	31.06	102.41	59.042	64.047
	6905	191	107.2	42.74	167.6	102.35	56.027	64.049

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	43.79	43.04	166.6	50.883	46.307	78.204
	6265	63	34.18	54.62	162.6	46.989	52.205	55.758
UNII6	6425	95	50.51	34.00	163.5	46.181	40.871	52.192
	6585	127	40.92	56.55	168.9	41.370	51.429	164.22
UNII8	6745	159	50.06	34.20	163.9	42.083	48.541	68.806
	6905	191	44.33	41.65	165.2	46.855	50.236	74.508

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	115.5	153.2	169.9	47.874	89.167	39.247
	6265	63	110.4	152.6	169.2	85.008	130.58	48.918
UNII6	6425	95	113.8	156.0	168.4	98.894	144.20	43.695
	6585	127	54.56	154.6	168.7	41.562	141.05	52.271
UNII8	6745	159	107.6	151.7	163.7	49.654	140.54	44.214
	6905	191	114.8	150.0	168.2	102.43	142.05	45.647

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	129.6	145.7	172.7	114.34	127.67	164.95
	6265	63	129.0	143.6	178.0	111.87	125.43	159.97
UNII6	6425	95	129.2	148.4	178.0	112.03	124.83	164.91
	6585	127	124.5	143.7	176.6	80.289	126.54	163.99
UNII8	6745	159	125.7	140.1	174.9	108.31	128.12	164.37
	6905	191	126.5	142.1	175.8	111.62	129.00	165.17

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	158.5		179.0	124.07		162.15
	6265	63	157.2		174.1	129.53		163.92
UNII6	6425	95	153.0		177.5	126.72		162.70
	6585	127	158.2		178.8	128.28		163.13
UNII8	6745	159	152.2		179.0	126.35		163.86
	6905	191	154.7		179.9	128.00		164.38

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.9	-	-	115.56	-
	6265	63	-	172.8	-	-	114.34	-
UNII6	6425	95	-	172.5	-	-	108.50	-
	6585	127	-	173.0	-	-	118.10	-
UNII8	6745	159	-	173.0	-	-	111.07	-
	6905	191	-	172.9	-	-	110.38	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	300.3	-	-	223.46	-
	6265	63	-	269.1	-	-	222.03	-
UNII6	6425	95	-	268.7	-	-	215.99	-
	6585	127	-	266.7	-	-	223.13	-
UNII8	6745	159	-	269.4	-	-	207.14	-
	6905	191	-	268.6	-	-	209.77	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	286.5	-	-	227.71	-
	6265	63	-	290.5	-	-	226.91	-
UNII6	6425	95	-	288.0	-	-	232.44	-
	6585	127	-	288.4	-	-	230.13	-
UNII8	6745	159	-	291.4	-	-	235.05	-
	6905	191	-	291.7	-	-	232.84	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	333.1	-	-	315.25	-
	6265	63	-	332.3	-	-	314.97	-
UNII6	6425	95	-	333.3	-	-	315.12	-
	6585	127	-	334.1	-	-	315.00	-
UNII8	6745	159	-	332.1	-	-	314.78	-
	6905	191	-	333.4	-	-	314.93	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	334.3	-	-	315.33	-
	6265	63	-	331.7	-	-	315.00	-
UNII6	6425	95	-	332.7	-	-	315.13	-
	6585	127	-	334.0	-	-	315.09	-
UNII8	6745	159	-	332.9	-	-	315.12	-
	6905	191	-	332.6	-	-	315.30	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.88	-	-	16.599	-
	6175	45	-	20.81	-	-	16.570	-
	6415	93	-	20.97	-	-	16.569	-
UNII6	6435	97	-	20.99	-	-	16.613	-
	6475	105	-	20.88	-	-	16.578	-
	6515	113	-	20.66	-	-	16.575	-
UNII7	6535	117	-	20.87	-	-	16.570	-
	6695	149	-	20.94	-	-	16.585	-
	6855	181	-	20.83	-	-	16.590	-
UNII8	6875	185	-	21.03	-	-	16.579	-
	6995	209	-	20.92	-	-	16.595	-
	7115	233	-	20.96	-	-	16.592	-

10.2.1.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.46	17.96	19.48	18.051	17.027	18.108
	6175	45	19.58	17.98	19.66	17.991	17.080	18.292
	6415	93	19.38	18.11	19.53	18.215	17.001	18.196
UNII6	6435	97	19.46	18.71	19.70	18.144	17.122	18.354
	6475	105	19.43	18.02	19.43	18.276	16.704	18.202
	6515	113	19.51	18.02	19.62	18.272	17.096	18.204
UNII7	6535	117	19.38	18.04	19.28	18.235	17.054	17.877
	6695	149	18.05	18.04	19.67	16.839	16.523	18.211
	6855	181	19.37	18.01	19.51	17.971	16.973	17.946
UNII8	6875	185	19.31	18.04	19.52	17.750	16.637	18.164
	6995	209	19.58	18.05	19.49	18.243	16.937	18.277
	7115	233	19.37	18.00	19.67	18.197	17.128	17.902

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.55	18.59	19.75	18.106	16.986	18.196
	6175	45	19.47	18.58	19.66	18.196	17.065	17.938
	6415	93	19.64	18.62	19.57	18.120	17.169	18.139
UNII6	6435	97	19.65	18.64	19.52	18.136	17.140	18.145
	6475	105	19.64	18.61	19.61	18.120	17.054	18.119
	6515	113	19.73	18.32	19.65	18.015	17.007	18.053
UNII7	6535	117	19.66	18.10	19.58	18.186	17.160	18.090
	6695	149	19.73	18.63	19.63	18.184	17.156	18.024
	6855	181	19.69	18.23	19.48	18.185	17.014	18.183
UNII8	6875	185	19.73	18.58	19.65	18.246	16.992	18.058
	6995	209	19.64	18.60	19.67	17.352	17.024	18.187
	7115	233	19.68	18.28	19.75	18.189	16.960	18.069

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.64	-	19.92	18.209	-	18.189
	6175	45	19.64	-	20.27	18.209	-	18.197
	6415	93	19.56	-	19.98	18.195	-	18.175
UNII6	6435	97	19.49	-	19.93	18.199	-	18.110
	6475	105	19.56	-	20.35	18.189	-	18.196
	6515	113	19.59	-	20.08	18.202	-	18.188
UNII7	6535	117	19.58	-	20.26	18.221	-	18.216
	6695	149	19.55	-	20.03	18.201	-	18.140
	6855	181	19.69	-	20.31	18.208	-	18.179
UNII8	6875	185	19.52	-	20.26	18.131	-	18.149
	6995	209	19.57	-	20.07	18.205	-	18.188
	7115	233	19.53	-	20.02	18.243	-	18.132

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.06	-	-	19.033	-
	6175	45	-	21.11	-	-	19.043	-
	6415	93	-	20.96	-	-	19.047	-
UNII6	6435	97	-	21.01	-	-	19.034	-
	6475	105	-	21.08	-	-	19.040	-
	6515	113	-	21.06	-	-	19.027	-
UNII7	6535	117	-	21.10	-	-	19.037	-
	6695	149	-	21.01	-	-	19.051	-
	6855	181	-	21.06	-	-	19.044	-
UNII8	6875	185	-	21.05	-	-	19.041	-
	6995	209	-	21.10	-	-	19.041	-
	7115	233	-	21.18	-	-	19.034	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.32	-	-	19.044	-
	6175	45	-	21.39	-	-	19.027	-
	6415	93	-	21.60	-	-	19.043	-
UNII6	6435	97	-	21.67	-	-	19.030	-
	6475	105	-	21.29	-	-	19.026	-
	6515	113	-	21.57	-	-	19.043	-
UNII7	6535	117	-	21.66	-	-	19.018	-
	6695	149	-	21.36	-	-	19.040	-
	6855	181	-	21.61	-	-	19.045	-
UNII8	6875	185	-	21.41	-	-	19.057	-
	6995	209	-	21.65	-	-	19.069	-
	7115	233	-	21.44	-	-	19.045	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.62	21.74	20.07	18.219	20.108	18.472
	6165	43	20.48	22.00	21.09	18.427	20.160	18.518
	6405	91	19.74	21.85	20.28	18.276	20.011	18.522
UNII6	6445	99	19.86	22.39	20.17	18.419	20.486	18.649
	6485	107	19.98	22.06	20.52	18.416	20.174	18.617
	6525	115	19.97	21.52	20.14	18.264	19.977	18.652
UNII7	6565	123	20.15	21.33	20.16	18.496	20.053	18.478
	6685	147	19.65	21.72	20.20	18.208	20.374	18.503
	6845	179	20.06	21.85	21.14	18.225	19.885	18.599
UNII8	6885	187	20.53	22.83	20.23	18.383	20.214	17.996
	7005	211	20.34	21.90	20.34	18.526	20.123	18.450
	7085	227	19.93	21.68	21.11	18.448	20.056	18.662

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.28	22.56	21.88	18.267	19.755	18.389
	6165	43	20.64	22.35	24.20	18.279	19.623	18.265
	6405	91	20.86	22.64	24.01	18.209	19.932	17.848
UNII6	6445	99	20.70	22.83	22.10	18.236	19.812	18.406
	6485	107	20.46	22.91	24.07	18.307	19.621	18.453
	6525	115	20.38	22.52	23.00	18.178	19.943	18.473
UNII7	6565	123	20.73	22.57	25.31	18.165	19.707	18.371
	6685	147	20.69	22.71	20.90	18.232	19.909	18.463
	6845	179	20.75	22.47	22.42	18.302	19.591	18.409
UNII8	6885	187	20.50	23.69	25.39	18.212	19.731	18.422
	7005	211	20.62	21.99	22.48	18.293	19.058	18.390
	7085	227	20.58	22.62	23.84	18.148	19.686	18.488

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	22.03	24.39	27.63	18.101	19.617	18.258
	6165	43	31.10	23.84	26.31	18.114	19.321	18.238
	6405	91	21.96	30.70	27.66	18.045	19.181	18.278
UNII6	6445	99	31.19	29.94	27.42	18.027	19.284	18.335
	6485	107	31.26	23.71	25.31	18.012	19.309	18.275
	6525	115	31.18	30.65	26.35	18.078	19.298	18.223
UNII7	6565	123	31.54	30.69	25.19	18.120	19.292	18.209
	6685	147	21.79	30.51	27.67	18.047	19.297	18.121
	6845	179	31.21	23.19	27.62	18.112	19.261	18.257
UNII8	6885	187	31.14	30.76	25.03	18.141	19.284	18.156
	7005	211	31.33	23.91	26.34	18.109	19.273	18.231
	7085	227	31.28	30.02	27.67	18.093	19.700	18.118

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.51	-	35.85	19.432	-	20.028
	6165	43	34.92	-	36.13	19.432	-	20.253
	6405	91	34.99	-	35.97	19.474	-	20.070
UNII6	6445	99	34.91	-	36.18	19.437	-	20.130
	6485	107	34.86	-	36.09	19.466	-	19.662
	6525	115	34.78	-	35.78	19.475	-	19.922
UNII7	6565	123	34.71	-	36.51	19.497	-	20.141
	6685	147	34.69	-	36.19	19.463	-	20.029
	6845	179	34.83	-	36.25	19.507	-	20.402
UNII8	6885	187	34.77	-	36.28	19.476	-	19.967
	7005	211	35.63	-	36.33	19.553	-	19.780
	7085	227	34.81	-	36.08	19.541	-	19.824

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.60	-	-	37.991	-
	6165	43	-	41.77	-	-	37.995	-
	6405	91	-	41.92	-	-	38.013	-
UNII6	6445	99	-	42.46	-	-	38.043	-
	6485	107	-	41.44	-	-	37.957	-
	6525	115	-	41.50	-	-	37.979	-
UNII7	6565	123	-	41.63	-	-	38.004	-
	6685	147	-	41.78	-	-	37.994	-
	6845	179	-	41.44	-	-	38.007	-
UNII8	6885	187	-	41.50	-	-	38.002	-
	7005	211	-	41.45	-	-	38.014	-
	7085	227	-	41.54	-	-	37.981	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.35	-	-	37.995	-
	6165	43	-	42.66	-	-	37.962	-
	6405	91	-	41.84	-	-	37.963	-
UNII6	6445	99	-	42.62	-	-	37.960	-
	6485	107	-	42.53	-	-	37.956	-
	6525	115	-	42.91	-	-	38.009	-
UNII7	6565	123	-	42.35	-	-	37.957	-
	6685	147	-	42.46	-	-	37.946	-
	6845	179	-	42.13	-	-	37.939	-
UNII8	6885	187	-	42.69	-	-	37.971	-
	7005	211	-	42.67	-	-	37.963	-
	7085	227	-	42.65	-	-	37.963	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	23.14	23.16	26.12	20.370	21.109	21.164
	6145	39	21.43	25.01	24.91	19.735	21.759	21.810
	6385	87	23.24	28.69	22.31	20.344	22.956	20.326
UNII6	6465	103	23.83	26.01	25.95	20.113	22.019	20.821
	6545	119	22.58	25.66	24.61	19.765	22.247	20.698
	6625	135	25.72	28.83	24.17	20.577	23.412	20.703
UNII7	6705	151	22.72	24.39	27.08	20.611	21.924	20.777
	6785	167	22.56	25.23	23.96	20.350	22.390	21.130
UNII8	6865	183	22.02	25.16	25.40	19.899	20.355	20.845
	6945	199	23.18	27.32	23.04	20.188	23.245	20.467
	7025	215	24.07	22.60	26.55	20.234	21.365	21.009

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	27.57	33.53	28.14	20.092	22.704	21.509
	6145	39	26.74	31.09	27.75	20.438	23.248	20.839
	6385	87	27.61	30.77	25.15	20.203	22.746	20.761
UNII6	6465	103	26.88	34.76	27.10	20.391	23.735	20.891
	6545	119	28.85	32.58	27.29	20.333	22.454	20.338
UNII7	6625	135	27.23	32.03	28.79	20.119	23.743	21.332
	6705	151	28.58	32.45	27.40	20.575	23.445	21.147
	6785	167	26.92	31.05	28.69	20.517	23.207	20.788
UNII8	6865	183	27.88	31.57	24.40	20.467	22.849	19.960
	6945	199	27.91	32.72	28.89	19.931	23.005	20.954
	7025	215	22.18	31.76	26.14	18.728	22.149	20.679

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	27.65	33.51	29.32	20.254	21.709	20.819
	6145	39	28.77	34.59	30.05	20.544	22.259	19.920
	6385	87	28.46	34.76	30.10	20.271	22.916	20.875
UNII6	6465	103	28.23	33.65	29.06	20.593	22.881	20.417
	6545	119	26.57	33.77	28.41	19.393	22.718	21.154
UNII7	6625	135	28.11	34.89	28.00	19.723	22.500	21.085
	6705	151	28.76	31.81	28.59	20.258	20.782	20.555
	6785	167	28.87	33.43	28.36	20.420	22.873	20.679
UNII8	6865	183	27.94	34.76	27.84	19.798	21.286	20.591
	6945	199	28.26	34.11	28.51	19.277	21.734	21.182
	7025	215	28.40	36.62	29.55	19.308	23.055	20.330

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	32.09	35.02	32.01	22.806	23.560	22.871
	6145	39	44.05	35.17	32.26	22.962	23.562	22.947
	6385	87	44.95	35.78	33.06	23.252	23.047	23.071
UNII6	6465	103	45.21	35.92	43.78	22.923	23.639	22.711
	6545	119	44.75	35.42	43.33	22.932	23.596	22.935
UNII7	6625	135	33.44	34.43	35.76	22.601	23.507	23.757
	6705	151	44.25	35.28	43.43	22.636	23.350	22.861
	6785	167	44.07	35.21	43.09	22.955	23.589	22.465
UNII8	6865	183	32.41	34.87	33.17	22.558	23.881	23.217
	6945	199	33.16	35.99	32.43	22.715	23.639	22.344
	7025	215	44.39	36.44	43.55	23.188	24.132	23.037

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	69.37	-	72.99	53.748	-	44.371
	6145	39	69.32	-	71.48	55.073	-	44.136
	6385	87	67.69	-	70.72	54.109	-	43.739
UNII6	6465	103	69.64	-	71.74	55.033	-	43.906
	6545	119	69.13	-	72.35	54.902	-	43.901
UNII7	6625	135	69.47	-	72.53	53.655	-	44.644
	6705	151	69.19	-	70.46	54.813	-	44.622
	6785	167	69.56	-	72.23	55.113	-	43.977
UNII8	6865	183	69.85	-	70.05	55.182	-	43.675
	6945	199	69.42	-	72.95	54.599	-	44.551
	7025	215	69.38	-	71.99	54.860	-	44.410

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	88.64	-	-	78.088	-
	6145	39	-	88.20	-	-	78.090	-
	6385	87	-	88.01	-	-	78.082	-
UNII6	6465	103	-	87.73	-	-	78.062	-
	6545	119	-	88.21	-	-	78.082	-
UNII7	6625	135	-	88.73	-	-	77.986	-
	6705	151	-	87.95	-	-	78.065	-
	6785	167	-	88.20	-	-	78.090	-
UNII8	6865	183	-	88.02	-	-	78.135	-
	6945	199	-	88.23	-	-	78.029	-
	7025	215	-	87.64	-	-	78.074	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.78	-	-	77.746	-
	6145	39	-	88.76	-	-	77.729	-
	6385	87	-	86.50	-	-	77.844	-
UNII6	6465	103	-	87.37	-	-	77.910	-
	6545	119	-	88.69	-	-	77.761	-
UNII7	6625	135	-	88.50	-	-	77.772	-
	6705	151	-	89.16	-	-	77.805	-
	6785	167	-	88.59	-	-	77.871	-
UNII8	6865	183	-	87.54	-	-	77.733	-
	6945	199	-	87.92	-	-	77.685	-
	7025	215	-	87.32	-	-	77.909	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	23.46	26.63	28.00	24.940	26.410	27.463
	6185	47	24.31	24.47	26.70	29.698	26.950	27.971
	6345	79	24.10	25.42	27.79	22.935	25.368	25.978
UNII6	6505	111	27.58	24.85	28.86	24.489	24.875	27.608
UNII7	6665	143	26.30	28.99	29.45	22.904	26.007	28.253
UNII8	6825	175	26.47	23.57	30.87	25.235	24.676	27.039
	6985	207	24.66	26.04	28.07	22.187	25.784	27.774

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.97	33.34	33.40	23.395	26.546	28.458
	6185	47	28.45	35.63	29.32	23.143	26.296	28.088
	6345	79	28.56	36.81	28.39	24.863	26.524	26.666
UNII6	6505	111	29.92	34.68	36.27	22.053	25.620	29.026
UNII7	6665	143	30.91	32.42	35.69	25.472	28.104	29.134
UNII8	6825	175	27.47	33.15	31.97	22.863	27.167	27.069
	6985	207	30.50	35.68	32.51	24.984	26.153	27.112

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	32.99	35.63	36.04	24.829	26.551	26.614
	6185	47	33.69	35.70	35.79	26.379	25.928	25.023
	6345	79	33.75	35.47	36.56	25.069	25.364	25.551
UNII6	6505	111	32.16	36.42	37.16	25.341	27.790	25.841
UNII7	6665	143	30.64	39.88	36.91	24.297	26.367	25.975
UNII8	6825	175	35.46	37.86	38.87	25.654	28.453	25.650
	6985	207	35.58	38.43	36.72	26.946	29.603	26.261

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.60	73.42	46.75	32.386	30.769	27.930
	6185	47	88.32	74.38	46.77	33.268	30.938	28.874
	6345	79	38.91	44.37	47.85	29.946	28.825	28.340
UNII6	6505	111	43.76	73.54	44.48	30.755	29.992	27.749
UNII7	6665	143	88.35	71.47	45.78	30.130	28.083	27.686
UNII8	6825	175	88.21	72.03	41.53	31.411	31.536	27.379
	6985	207	43.14	72.53	43.37	31.287	29.098	27.847

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.92	-	106.4	48.069	-	52.597
	6185	47	88.07	-	108.3	48.269	-	51.539
	6345	79	88.00	-	106.8	49.030	-	51.121
UNII6	6505	111	88.60	-	104.6	48.412	-	50.864
UNII7	6665	143	88.47	-	106.9	46.155	-	51.959
UNII8	6825	175	87.90	-	106.5	46.140	-	51.169
	6985	207	88.77	-	108.6	46.539	-	52.001

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	144.3	-	-	81.033	-
	6185	47	-	140.0	-	-	80.826	-
	6345	79	-	141.0	-	-	80.840	-
UNII6	6505	111	-	141.2	-	-	81.022	-
UNII7	6665	143	-	140.7	-	-	80.590	-
UNII8	6825	175	-	142.5	-	-	81.124	-
	6985	207	-	145.1	-	-	82.048	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	28.51	22.28	24.89	27.392	29.551	27.352
	6185	47	26.69	25.21	29.26	28.908	28.531	27.009
	6345	79	24.76	31.23	26.93	25.384	29.261	23.183
UNII6	6505	111	31.89	29.95	29.03	28.277	29.756	26.412
UNII7	6665	143	26.91	26.88	25.97	26.308	29.270	25.648
UNII8	6825	175	25.53	26.31	24.63	25.315	28.555	23.270
	6985	207	24.46	26.60	28.33	25.186	28.019	25.398

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	33.79	32.12	30.72	26.888	29.633	25.652
	6185	47	32.96	36.27	29.48	27.117	30.888	24.665
	6345	79	31.45	36.06	31.60	27.537	32.509	26.035
UNII6	6505	111	36.20	34.87	27.53	27.648	30.101	24.834
UNII7	6665	143	31.31	31.16	28.86	27.813	30.732	25.281
UNII8	6825	175	36.53	32.91	28.41	28.575	29.238	26.675
	6985	207	34.41	35.97	30.32	26.714	28.780	23.682

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	41.11	39.00	35.16	27.035	30.616	24.267
	6185	47	36.36	39.27	28.80	27.028	28.920	21.876
	6345	79	40.83	42.05	34.62	28.305	29.605	24.689
UNII6	6505	111	36.97	43.57	34.15	26.738	28.520	23.954
UNII7	6665	143	36.51	40.47	29.71	27.875	30.784	24.656
UNII8	6825	175	43.30	36.70	32.10	26.368	27.931	24.290
	6985	207	40.74	41.07	30.15	27.733	28.328	23.199

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	50.05	51.72	85.85	32.317	30.198	29.529
	6185	47	50.16	50.56	42.05	32.290	30.251	28.807
	6345	79	52.29	50.06	85.29	32.669	30.814	28.323
UNII6	6505	111	48.34	50.42	85.60	32.755	30.364	29.083
UNII7	6665	143	50.49	52.02	48.25	32.160	31.448	32.270
UNII8	6825	175	49.48	50.14	86.29	33.281	30.204	28.504
	6985	207	52.42	49.53	40.36	34.655	29.828	27.748

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	102.9	-	88.50	60.825	-	53.476
	6185	47	96.99	-	88.06	59.241	-	50.703
	6345	79	101.9	-	88.09	59.619	-	52.013
UNII6	6505	111	96.40	-	86.95	61.238	-	51.216
UNII7	6665	143	95.94	-	88.05	52.009	-	52.312
UNII8	6825	175	96.38	-	88.69	57.200	-	51.016
	6985	207	98.02	-	88.02	57.868	-	50.747

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	134.4	-	-	83.425	-
	6185	47	-	132.3	-	-	81.144	-
	6345	79	-	135.2	-	-	81.349	-
UNII6	6505	111	-	128.1	-	-	83.000	-
UNII7	6665	143	-	129.9	-	-	81.370	-
UNII8	6825	175	-	130.8	-	-	80.208	-
	6985	207	-	127.1	-	-	80.301	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	176.1	-	-	157.44	-
	6185	47	-	175.8	-	-	157.20	-
	6345	79	-	172.9	-	-	157.19	-
UNII6	6505	111	-	174.4	-	-	157.36	-
UNII7	6665	143	-	173.8	-	-	157.23	-
UNII8	6825	175	-	172.8	-	-	157.14	-
	6985	207	-	172.6	-	-	157.24	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	174.0	-	-	157.23	-
	6185	47	-	173.9	-	-	157.22	-
	6345	79	-	173.5	-	-	157.07	-
UNII6	6505	111	-	173.8	-	-	157.05	-
UNII7	6665	143	-	173.8	-	-	156.88	-
UNII8	6825	175	-	173.1	-	-	156.87	-
	6985	207	-	173.4	-	-	157.26	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	163.5	35.39	104.9	161.03	105.24	90.460
	6265	63	168.7	38.68	36.44	165.28	49.137	46.787
UNII6	6425	95	35.02	43.71	104.4	85.392	88.561	81.079
	6585	127	170.4	40.45	103.3	72.141	41.667	42.255
UNII8	6745	159	170.1	36.37	35.52	166.13	39.343	43.767
	6905	191	171.0	42.59	102.4	73.482	43.140	47.925

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	31.37	44.57	108.9	38.736	42.510	85.388
	6265	63	33.76	32.45	35.52	39.170	39.562	44.949
UNII6	6425	95	33.27	140.2	109.2	45.849	47.792	52.921
	6585	127	35.39	47.97	36.75	41.123	45.059	46.310
UNII8	6745	159	26.60	44.73	112.1	42.179	45.201	102.00
	6905	191	36.04	36.52	106.6	43.915	40.098	54.019

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	170.4	140.3	114.0	73.241	128.55	60.994
	6265	63	170.3	49.22	108.2	75.886	45.864	51.787
UNII6	6425	95	163.2	136.4	111.9	45.331	52.257	46.039
	6585	127	166.4	143.6	108.6	58.633	128.81	39.489
UNII8	6745	159	167.9	145.0	114.7	78.158	87.217	41.026
	6905	191	167.4	141.8	112.0	72.305	79.986	47.167

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	174.5	164.7	134.5	163.49	133.64	107.64
	6265	63	172.2	162.8	133.9	162.32	148.68	113.32
UNII6	6425	95	171.8	164.5	134.0	161.00	149.04	111.89
	6585	127	174.5	165.8	133.2	107.99	150.24	109.91
UNII8	6745	159	169.0	167.5	130.6	159.30	148.67	115.13
	6905	191	173.6	161.8	133.4	161.39	147.73	111.50

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	179.8		150.6	162.70		130.09
	6265	63	180.2		157.5	163.60		130.42
UNII6	6425	95	177.4		155.8	163.79		130.33
	6585	127	178.7		153.5	163.47		129.22
UNII8	6745	159	178.1		157.6	162.82		129.40
	6905	191	177.9		156.3	163.89		127.55

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31		170.6			116.73	
	6265	63		173.7			143.68	
UNII6	6425	95		171.1			130.85	
	6585	127		172.0			127.01	
UNII8	6745	159		171.8			121.91	
	6905	191		171.3			125.43	

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	97.26	52.85	41.63	98.309	58.620	59.948
	6265	63	37.38	56.17	39.92	51.402	53.198	43.426
UNII6	6425	95	35.09	54.04	42.42	63.947	56.975	47.723
	6585	127	92.82	55.48	36.85	93.699	44.696	41.021
UNII8	6745	159	92.23	38.75	39.53	92.983	41.930	45.200
	6905	191	41.12	36.32	40.41	44.224	37.468	46.797

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	40.62	38.33	48.33	39.227	41.590	45.643
	6265	63	37.74	43.07	45.87	38.444	46.645	48.298
UNII6	6425	95	39.33	43.31	43.04	43.213	42.043	48.985
	6585	127	43.14	37.18	44.71	40.382	42.473	43.329
UNII8	6745	159	33.12	42.00	45.24	40.435	42.210	44.727
	6905	191	52.90	47.39	48.81	49.351	47.410	45.302

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.8	66.56	47.70	47.990	59.169	41.331
	6265	63	92.47	61.65	42.52	50.482	56.272	38.312
UNII6	6425	95	104.6	68.15	47.52	70.688	55.405	41.474
	6585	127	96.99	60.55	45.33	52.231	54.880	38.100
UNII8	6745	159	97.69	67.75	46.00	91.354	56.579	39.718
	6905	191	97.67	64.93	45.44	89.172	55.356	39.108

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	112.3	89.41	55.35	89.756	73.165	42.804
	6265	63	111.6	91.26	63.85	93.595	71.597	42.901
UNII6	6425	95	108.9	91.34	66.85	91.790	71.486	44.692
	6585	127	110.1	89.64	68.23	94.382	70.693	42.134
UNII8	6745	159	116.1	91.13	62.80	93.089	69.543	43.379
	6905	191	111.7	90.16	62.92	87.739	71.493	42.298

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	124.4		156.6	104.29		101.40
	6265	63	120.0		150.7	101.58		98.454
UNII6	6425	95	126.2		149.9	103.57		96.401
	6585	127	120.7		149.4	99.714		96.963
UNII8	6745	159	126.7		152.7	103.52		97.366
	6905	191	122.2		152.8	100.39		97.310

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31		178.7			110.91	
	6265	63		174.0			107.27	
UNII6	6425	95		173.5			108.24	
	6585	127		175.4			109.57	
UNII8	6745	159		175.1			110.12	
	6905	191		175.5			110.05	

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	36.03	67.02	90.27	48.003	66.321	98.089
	6265	63	39.19	63.96	94.17	41.421	49.581	57.175
UNII6	6425	95	35.06	44.89	90.77	43.293	59.697	92.614
	6585	127	43.64	67.24	90.44	44.906	51.089	75.090
UNII8	6745	159	38.99	62.61	93.27	41.877	45.838	44.666
	6905	191	43.03	37.91	85.97	42.482	47.785	45.639

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	46.96	46.24	92.27	41.992	42.743	47.715
	6265	63	46.94	46.08	90.00	45.978	46.502	55.654
UNII6	6425	95	46.83	53.45	101.6	42.302	40.200	97.807
	6585	127	43.39	52.75	102.8	42.683	44.306	55.381
UNII8	6745	159	44.48	42.60	96.80	42.925	45.502	85.425
	6905	191	41.43	40.34	99.64	41.424	44.783	96.396

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	57.17	73.66	97.14	45.914	55.489	50.167
	6265	63	48.01	70.98	46.81	42.117	64.364	44.191
UNII6	6425	95	55.44	74.73	102.6	44.840	64.306	42.612
	6585	127	43.09	68.22	95.35	41.726	58.986	45.243
UNII8	6745	159	51.38	75.51	93.62	43.049	65.138	42.895
	6905	191	50.64	67.24	99.02	41.098	45.309	43.481

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	78.34	69.31	108.7	53.275	52.713	93.463
	6265	63	81.71	68.79	108.4	52.022	53.794	92.304
UNII6	6425	95	77.62	64.66	102.5	51.419	53.066	90.219
	6585	127	76.99	71.27	108.4	52.894	50.665	92.168
UNII8	6745	159	78.96	68.95	107.3	52.753	52.591	91.196
	6905	191	76.21	67.31	109.5	51.756	52.202	92.689

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	104.7	-	106.4	77.936	-	93.591
	6265	63	98.47	-	106.5	75.562	-	93.633
UNII6	6425	95	101.8	-	107.6	75.990	-	93.631
	6585	127	101.6	-	106.9	78.679	-	93.268
UNII8	6745	159	102.4	-	107.2	80.880	-	94.132
	6905	191	97.86	-	108.6	76.532	-	94.915

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	178.8	-	-	96.336	-
	6265	63	-	179.5	-	-	96.797	-
UNII6	6425	95	-	182.6	-	-	100.67	-
	6585	127	-	175.7	-	-	95.007	-
UNII8	6745	159	-	180.1	-	-	99.527	-
	6905	191	-	182.0	-	-	97.062	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	101.5	31.85	166.0	100.66	105.44	157.64
	6265	63	105.0	29.30	32.59	101.76	47.910	55.139
UNII6	6425	95	107.3	151.0	37.00	97.768	143.87	121.08
	6585	127	32.95	144.8	171.2	41.662	62.619	65.703
UNII8	6745	159	34.29	148.2	168.6	42.560	140.48	61.741
	6905	191	26.17	33.53	27.46	45.226	48.461	46.071

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	33.96	53.13	170.0	42.901	52.197	77.076
	6265	63	107.2	49.56	170.5	49.271	52.158	165.20
UNII6	6425	95	43.06	51.66	165.3	42.670	48.476	159.51
	6585	127	46.65	52.56	169.8	44.262	46.433	165.84
UNII8	6745	159	45.32	49.68	172.2	44.628	47.282	164.42
	6905	191	44.87	44.93	169.0	41.284	43.170	78.172

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	52.76	154.3	165.8	42.650	75.166	37.464
	6265	63	113.8	151.9	166.6	92.874	142.06	42.011
UNII6	6425	95	113.8	151.1	169.4	97.045	141.39	54.105
	6585	127	110.4	156.1	166.6	62.568	142.55	45.390
UNII8	6745	159	108.9	155.8	168.7	52.866	143.65	43.682
	6905	191	115.1	153.1	166.8	48.908	141.35	42.865

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	131.1	142.7	173.0	115.38	128.83	164.45
	6265	63	128.6	143.2	179.1	111.58	128.63	165.61
UNII6	6425	95	128.2	146.3	179.3	112.05	128.73	163.69
	6585	127	129.1	141.8	173.9	112.06	128.37	165.16
UNII8	6745	159	127.4	141.3	176.8	112.02	124.04	164.12
	6905	191	127.3	142.1	178.2	112.07	125.11	163.21

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	153.4		177.0	126.96		163.57
	6265	63	152.0		174.2	128.85		164.04
UNII6	6425	95	154.3		178.9	125.69		164.12
	6585	127	158.9		178.4	130.09		163.90
UNII8	6745	159	152.2		178.4	127.89		162.98
	6905	191	159.5		177.4	127.90		163.69

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.7	-	-	113.14	-
	6265	63	-	172.4	-	-	107.42	-
UNII6	6425	95	-	173.2	-	-	109.50	-
	6585	127	-	173.5	-	-	108.90	-
UNII8	6745	159	-	172.1	-	-	110.26	-
	6905	191	-	173.5	-	-	107.54	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	266.9	-	-	209.82	-
	6265	63	-	269.7	-	-	227.01	-
UNII6	6425	95	-	267.4	-	-	215.55	-
	6585	127	-	267.3	-	-	221.73	-
UNII8	6745	159	-	268.3	-	-	214.10	-
	6905	191	-	302.5	-	-	221.22	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	290.4	-	-	230.12	-
	6265	63	-	290.5	-	-	229.61	-
UNII6	6425	95	-	289.2	-	-	231.41	-
	6585	127	-	291.8	-	-	233.31	-
UNII8	6745	159	-	293.4	-	-	230.59	-
	6905	191	-	289.0	-	-	224.17	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	335.0	-	-	315.42	-
	6265	63	-	333.8	-	-	315.13	-
UNII6	6425	95	-	332.6	-	-	314.88	-
	6585	127	-	333.7	-	-	315.17	-
UNII8	6745	159	-	333.8	-	-	315.41	-
	6905	191	-	333.2	-	-	315.28	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	334.5	-	-	315.81	-
	6265	63	-	331.2	-	-	314.84	-
UNII6	6425	95	-	331.7	-	-	315.31	-
	6585	127	-	333.9	-	-	314.82	-
UNII8	6745	159	-	334.1	-	-	315.37	-
	6905	191	-	332.3	-	-	315.05	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.96	-	-	16.592	-
	6175	45	-	20.81	-	-	16.592	-
	6415	93	-	21.04	-	-	16.568	-
UNII6	6435	97	-	21.42	-	-	16.606	-
	6475	105	-	20.80	-	-	16.583	-
	6515	113	-	21.02	-	-	16.611	-
UNII7	6535	117	-	21.01	-	-	16.586	-
	6695	149	-	20.98	-	-	16.577	-
	6855	181	-	20.80	-	-	16.585	-
UNII8	6875	185	-	20.86	-	-	16.586	-
	6995	209	-	20.85	-	-	16.591	-
	7115	233	-	20.90	-	-	16.597	-

10.2.2 26 dB BANDWIDTH(Standard client)

10.2.2.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.49	18.07	19.54	18.274	16.849	18.321
	6175	45	19.38	18.05	19.41	18.319	17.085	18.266
	6415	93	19.41	18.08	19.58	18.260	17.043	18.258
UNII7	6535	117	19.30	17.94	19.44	17.780	16.535	18.121
	6695	149	19.44	17.97	19.54	18.225	17.037	18.127
	6855	181	19.34	17.99	19.63	17.788	16.983	18.228

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.54	18.63	19.63	18.156	17.136	17.945
	6175	45	19.75	18.63	19.48	18.167	16.959	18.134
	6415	93	19.60	18.28	19.67	18.150	16.675	18.039
UNII7	6535	117	19.37	18.22	19.71	17.779	17.037	18.068
	6695	149	19.59	18.21	19.86	18.140	16.846	18.039
	6855	181	19.61	18.51	19.71	18.114	16.868	18.052

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.65	-	20.18	18.171	-	18.149
	6175	45	19.64	-	20.13	18.212	-	18.173
	6415	93	19.78	-	20.23	18.183	-	18.139
UNII7	6535	117	19.65	-	20.13	18.234	-	18.156
	6695	149	19.62	-	19.84	18.202	-	18.192
	6855	181	19.59	-	20.26	18.009	-	18.209

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.05	-	-	19.041	-
	6175	45	-	21.02	-	-	19.030	-
	6415	93	-	21.02	-	-	19.041	-
UNII7	6535	117	-	21.04	-	-	19.028	-
	6695	149	-	21.07	-	-	19.034	-
	6855	181	-	21.03	-	-	19.041	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.69	-	-	19.029	-
	6175	45	-	21.41	-	-	19.037	-
	6415	93	-	21.34	-	-	19.025	-
UNII7	6535	117	-	21.43	-	-	19.043	-
	6695	149	-	21.36	-	-	19.017	-
	6855	181	-	21.44	-	-	19.036	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.00	21.92	20.69	18.509	19.822	18.583
	6165	43	20.03	22.29	19.56	18.445	20.248	18.015
	6405	91	20.03	21.73	20.54	18.555	20.103	18.502
UNII7	6565	123	20.10	21.82	20.92	18.444	20.180	18.571
	6685	147	19.85	21.92	20.67	18.322	20.224	18.562
	6845	179	19.60	22.40	20.28	18.111	19.996	18.455

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.49	22.66	22.01	18.067	19.941	18.437
	6165	43	20.97	22.57	25.46	18.324	19.762	18.399
	6405	91	20.70	22.70	24.28	18.293	19.989	18.473
UNII7	6565	123	20.44	22.75	24.07	18.146	19.918	18.452
	6685	147	20.99	22.83	24.18	18.143	19.820	18.526
	6845	179	20.79	22.56	22.51	18.139	20.085	18.369

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	31.30	30.68	26.32	18.095	19.785	18.259
	6165	43	31.50	30.23	27.65	18.133	19.323	18.285
	6405	91	31.21	30.25	27.62	18.097	19.445	18.180
UNII7	6565	123	21.98	29.95	25.30	18.083	19.329	18.314
	6685	147	22.14	30.74	26.44	18.065	19.413	18.296
	6845	179	31.25	29.26	26.46	17.968	19.314	18.237

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.97	-	36.03	19.565	-	19.984
	6165	43	34.93	-	35.79	19.436	-	19.968
	6405	91	35.04	-	36.02	19.410	-	20.127
UNII7	6565	123	34.94	-	36.39	19.508	-	20.134
	6685	147	34.97	-	36.14	19.407	-	19.928
	6845	179	34.70	-	36.05	19.482	-	20.536

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.68	-	-	38.021	-
	6165	43	-	41.76	-	-	37.946	-
	6405	91	-	41.91	-	-	38.012	-
UNII7	6565	123	-	41.74	-	-	37.985	-
	6685	147	-	41.74	-	-	38.006	-
	6845	179	-	41.51	-	-	37.977	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.54	-	-	37.980	-
	6165	43	-	42.42	-	-	37.972	-
	6405	91	-	42.73	-	-	37.995	-
UNII7	6565	123	-	42.41	-	-	37.987	-
	6685	147	-	42.35	-	-	38.013	-
	6845	179	-	42.12	-	-	38.002	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	23.46	25.24	23.82	20.540	21.937	20.305
	6145	39	24.70	26.19	25.18	20.592	22.937	21.213
	6385	87	21.88	23.47	25.90	20.252	21.946	20.724
UNII7	6625	135	24.05	26.17	22.78	19.660	22.328	20.382
	6705	151	25.49	25.12	23.17	20.904	22.672	20.723
	6785	167	25.06	26.54	24.56	20.371	21.955	21.363

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	25.75	31.25	26.91	19.980	22.533	20.840
	6145	39	26.49	31.93	26.11	20.256	22.483	20.430
	6385	87	25.63	29.16	26.87	20.591	22.186	21.086
UNII7	6625	135	27.90	30.52	27.74	20.389	22.720	20.852
	6705	151	27.84	33.23	28.91	20.776	22.612	20.674
	6785	167	26.27	31.47	28.31	20.119	23.474	20.811

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.94	33.06	28.45	20.216	22.573	20.382
	6145	39	28.90	34.13	28.82	20.593	21.431	20.375
	6385	87	27.88	34.29	28.23	19.454	22.118	20.660
UNII7	6625	135	29.01	34.35	29.68	19.536	21.468	20.441
	6705	151	29.26	34.73	29.77	20.027	22.274	21.088
	6785	167	29.81	33.81	29.33	20.129	21.184	20.870

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	32.74	36.50	31.99	22.580	23.958	22.891
	6145	39	31.46	36.39	31.03	22.451	24.000	22.638
	6385	87	32.84	34.87	31.34	22.781	23.179	22.947
UNII7	6625	135	32.59	35.50	32.22	22.326	23.389	22.596
	6705	151	32.83	38.93	32.49	22.270	24.957	22.709
	6785	167	32.11	36.71	32.34	22.671	23.342	22.423

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.74	-	72.84	54.829	-	44.525
	6145	39	69.82	-	72.45	54.810	-	44.206
	6385	87	69.36	-	73.37	54.460	-	44.565
UNII7	6625	135	69.53	-	73.15	54.426	-	45.113
	6705	151	69.70	-	72.57	54.757	-	43.801
	6785	167	69.74	-	73.04	54.780	-	44.905

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.94	-	-	77.726	-
	6145	39	-	87.28	-	-	77.763	-
	6385	87	-	88.30	-	-	77.725	-
UNII7	6625	135		86.78			77.730	
	6705	151	-	88.57	-	-	77.769	-
	6785	167		88.30			77.739	

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.16	-	-	77.703	-
	6145	39	-	87.77	-	-	77.737	-
	6385	87	-	87.06	-	-	77.791	-
UNII7	6625	135		87.55			77.854	
	6705	151	-	87.29	-	-	77.838	-
	6785	167		88.75			77.840	

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	23.99	28.67	27.93	26.341	26.901	27.124
	6185	47	29.43	27.83	30.13	29.860	26.513	28.473
	6345	79	26.17	27.62	28.77	25.457	25.256	28.689
UNII7	6665	143	26.92	29.94	27.46	24.423	26.335	26.769

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	29.22	32.95	30.95	23.690	28.268	28.038
	6185	47	29.83	36.26	32.59	24.279	26.435	28.826
	6345	79	27.62	31.70	31.84	22.311	24.898	27.984
UNII7	6665	143	28.77	33.13	33.22	23.876	26.341	28.852

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	36.53	39.12	37.29	26.445	26.565	26.966
	6185	47	35.12	37.35	35.49	25.577	25.471	24.744
	6345	79	32.74	37.82	33.69	24.215	26.289	25.658
UNII7	6665	143	33.97	37.18	37.15	26.107	26.796	25.195

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	45.03	45.45	43.16	30.528	29.006	28.122
	6185	47	48.12	50.05	44.22	32.380	31.424	28.858
	6345	79	40.75	45.83	44.30	30.498	28.526	28.226
UNII7	6665	143	42.83	45.18	44.41	29.862	28.975	26.682

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	72.06	-	110.2	46.676	-	52.276
	6185	47	70.00	-	110.2	47.569	-	51.385
	6345	79	70.90	-	104.8	46.528	-	52.111
UNII7	6665	143	70.22	-	106.3	46.691	-	51.357

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	142.4	-	-	81.734	-
	6185	47	-	142.0	-	-	81.521	-
	6345	79	-	139.6	-	-	80.597	-
UNII7	6665	143	-	139.4	-	-	81.131	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	28.40	20.49	26.69	28.302	24.106	26.345
	6185	47	27.60	31.80	25.39	27.554	32.564	25.830
	6345	79	24.78	26.75	25.33	24.591	31.147	23.627
UNII7	6665	143	25.69	28.74	25.02	26.156	30.277	24.747

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	34.43	38.16	30.98	28.117	30.196	26.459
	6185	47	32.70	34.87	28.90	25.890	30.002	25.041
	6345	79	34.42	36.42	29.33	26.574	29.542	25.855
UNII7	6665	143	35.96	37.02	29.65	25.881	31.854	25.884

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	36.66	40.72	33.75	26.430	28.524	24.531
	6185	47	35.78	37.81	34.57	26.655	28.256	24.257
	6345	79	38.49	36.85	33.07	27.591	27.945	24.824
UNII7	6665	143	37.55	41.74	32.93	27.067	29.573	24.724

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	48.20	50.52	41.50	33.429	29.780	28.920
	6185	47	46.57	51.43	40.49	31.944	31.185	27.226
	6345	79	48.76	48.52	40.90	33.036	30.448	28.013
UNII7	6665	143	48.14	51.36	51.61	33.042	31.097	33.554

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	101.6	-	73.45	62.813	-	50.770
	6185	47	97.59	-	74.06	59.171	-	50.084
	6345	79	95.43	-	72.09	61.820	-	51.386
UNII7	6665	143	103.0	-	73.11	57.627	-	51.761

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	132.4	-	-	80.545	-
	6185	47	-	129.9	-	-	81.229	-
	6345	79	-	131.7	-	-	81.495	-
UNII7	6665	143	-	134.1	-	-	83.120	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	176.4	-	-	157.48	-
	6185	47	-	172.3	-	-	157.30	-
	6345	79	-	172.8	-	-	157.28	-
UNII7	6665	143	-	173.7	-	-	157.03	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	174.8	-	-	157.07	-
	6185	47	-	172.9	-	-	157.16	-
	6345	79	-	172.1	-	-	156.97	-
UNII7	6665	143	-	171.8	-	-	157.08	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	170.4	31.56	101.4	167.61	70.949	95.235
	6265	63	169.0	135.1	104.0	165.02	64.807	51.483

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	36.43	45.03	109.8	47.495	43.073	49.754
	6265	63	32.78	45.95	95.45	40.065	46.603	53.440

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	169.0	133.4	50.25	80.271	65.395	46.340
	6265	63	171.6	142.1	110.7	99.947	128.22	51.820

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	172.8	165.4	135.5	162.81	146.77	112.99
	6265	63	174.0	164.3	131.2	161.68	149.32	111.78

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	178.1		154.5	163.22		130.29
	6265	63	179.8		155.2	164.71		128.31

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31		171.2			121.03	
	6265	63		173.8			129.70	

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	90.38	34.20	35.31	93.270	50.049	61.216
	6265	63	94.23	34.20	36.45	90.296	41.609	42.035

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	48.09	43.21	44.14	41.742	44.422	43.373
	6265	63	48.53	44.44	43.26	43.318	47.838	43.101

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	105.6	65.33	44.48	75.817	53.716	39.215
	6265	63	102.8	64.80	45.31	47.697	57.894	37.870

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	114.4	87.93	59.93	93.000	68.475	42.134
	6265	63	103.7	90.21	61.05	89.092	72.230	40.996

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	127.1		155.3	103.54		100.93
	6265	63	124.2		152.7	99.550		98.910

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31		177.5			113.13	
	6265	63		176.7			111.82	

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	34.43	63.29	95.79	44.779	55.452	82.945
	6265	63	41.33	42.72	38.28	40.566	47.224	52.417

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.18	50.77	93.83	43.961	45.965	91.521
	6265	63	45.76	51.32	97.66	45.742	44.758	49.750
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	61.54	73.91	97.64	46.784	62.693	44.004
	6265	63	54.12	71.98	95.94	43.788	64.206	43.895
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	82.12	66.43	110.2	55.196	54.736	91.916
	6265	63	81.44	70.74	107.1	53.984	53.732	92.977
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	102.5	-	107.0	76.340	-	93.368
	6265	63	99.30	-	108.0	73.854	-	95.128
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.7	-	-	98.257	-
	6265	63	-	186.6	-	-	97.994	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	107.5	39.10	166.1	104.79	82.485	89.107
	6265	63	32.63	143.3	30.84	41.521	52.114	46.397
Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	43.79	43.04	166.6	50.883	46.307	78.204
	6265	63	34.18	54.62	162.6	46.989	52.205	55.758

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	115.5	153.2	169.9	47.874	89.167	39.247
	6265	63	110.4	152.6	169.2	85.008	130.58	48.918
Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	129.6	145.7	172.7	114.34	127.67	164.95
	6265	63	129.0	143.6	178.0	111.87	125.43	159.97
Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	158.5		179.0	124.07		162.15
	6265	63	157.2		174.1	129.53		163.92
Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.9	-	-	115.56	-
	6265	63	-	172.8	-	-	114.34	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	300.3	-	-	223.46	-
	6265	63	-	269.1	-	-	222.03	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	286.5	-	-	227.71	-
	6265	63	-	290.5	-	-	226.91	-
Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	333.1	-	-	315.25	-
	6265	63	-	332.3	-	-	314.97	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	334.3	-	-	315.33	-
	6265	63	-	331.7	-	-	315.00	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.88	-	-	16.599	-
	6175	45	-	20.81	-	-	16.570	-
	6415	93	-	20.97	-	-	16.569	-
UNII7	6535	117	-	20.87	-	-	16.570	-
	6695	149	-	20.94	-	-	16.585	-
	6855	181	-	20.83	-	-	16.590	-

10.2.2.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.46	17.96	19.48	18.051	17.027	18.108
	6175	45	19.58	17.98	19.66	17.991	17.080	18.292
	6415	93	19.38	18.11	19.53	18.215	17.001	18.196
UNII7	6535	117	19.38	18.04	19.28	18.235	17.054	17.877
	6695	149	18.05	18.04	19.67	16.839	16.523	18.211
	6855	181	19.37	18.01	19.51	17.971	16.973	17.946

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.55	18.59	19.75	18.106	16.986	18.196
	6175	45	19.47	18.58	19.66	18.196	17.065	17.938
	6415	93	19.64	18.62	19.57	18.120	17.169	18.139
UNII7	6535	117	19.66	18.10	19.58	18.186	17.160	18.090
	6695	149	19.73	18.63	19.63	18.184	17.156	18.024
	6855	181	19.69	18.23	19.48	18.185	17.014	18.183

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.64	-	19.92	18.209	-	18.189
	6175	45	19.64	-	20.27	18.209	-	18.197
	6415	93	19.56	-	19.98	18.195	-	18.175
UNII7	6535	117	19.58	-	20.26	18.221	-	18.216
	6695	149	19.55	-	20.03	18.201	-	18.140
	6855	181	19.69	-	20.31	18.208	-	18.179

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.06	-	-	19.033	-
	6175	45	-	21.11	-	-	19.043	-
	6415	93	-	20.96	-	-	19.047	-
UNII7	6535	117	-	21.10	-	-	19.037	-
	6695	149	-	21.01	-	-	19.051	-
	6855	181	-	21.06	-	-	19.044	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.32	-	-	19.044	-
	6175	45	-	21.39	-	-	19.027	-
	6415	93	-	21.60	-	-	19.043	-
UNII7	6535	117	-	21.66	-	-	19.018	-
	6695	149	-	21.36	-	-	19.040	-
	6855	181	-	21.61	-	-	19.045	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.62	21.74	20.07	18.219	20.108	18.472
	6165	43	20.48	22.00	21.09	18.427	20.160	18.518
	6405	91	19.74	21.85	20.28	18.276	20.011	18.522
UNII7	6565	123	20.15	21.33	20.16	18.496	20.053	18.478
	6685	147	19.65	21.72	20.20	18.208	20.374	18.503
	6845	179	20.06	21.85	21.14	18.225	19.885	18.599

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.28	22.56	21.88	18.267	19.755	18.389
	6165	43	20.64	22.35	24.20	18.279	19.623	18.265
	6405	91	20.86	22.64	24.01	18.209	19.932	17.848
UNII7	6565	123	20.73	22.57	25.31	18.165	19.707	18.371
	6685	147	20.69	22.71	20.90	18.232	19.909	18.463
	6845	179	20.75	22.47	22.42	18.302	19.591	18.409

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	22.03	24.39	27.63	18.101	19.617	18.258
	6165	43	31.10	23.84	26.31	18.114	19.321	18.238
	6405	91	21.96	30.70	27.66	18.045	19.181	18.278
UNII7	6565	123	31.54	30.69	25.19	18.120	19.292	18.209
	6685	147	21.79	30.51	27.67	18.047	19.297	18.121
	6845	179	31.21	23.19	27.62	18.112	19.261	18.257

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.51	-	35.85	19.432	-	20.028
	6165	43	34.92	-	36.13	19.432	-	20.253
	6405	91	34.99	-	35.97	19.474	-	20.070
UNII7	6565	123	34.71	-	36.51	19.497	-	20.141
	6685	147	34.69	-	36.19	19.463	-	20.029
	6845	179	34.83	-	36.25	19.507	-	20.402

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.60	-	-	37.991	-
	6165	43	-	41.77	-	-	37.995	-
	6405	91	-	41.92	-	-	38.013	-
UNII7	6565	123	-	41.63	-	-	38.004	-
	6685	147	-	41.78	-	-	37.994	-
	6845	179	-	41.44	-	-	38.007	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.35	-	-	37.995	-
	6165	43	-	42.66	-	-	37.962	-
	6405	91	-	41.84	-	-	37.963	-
UNII7	6565	123	-	42.35	-	-	37.957	-
	6685	147	-	42.46	-	-	37.946	-
	6845	179	-	42.13	-	-	37.939	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	23.14	23.16	26.12	20.370	21.109	21.164
	6145	39	21.43	25.01	24.91	19.735	21.759	21.810
	6385	87	23.24	28.69	22.31	20.344	22.956	20.326
UNII7	6625	135	25.72	28.83	24.17	20.577	23.412	20.703
	6705	151	22.72	24.39	27.08	20.611	21.924	20.777
	6785	167	22.56	25.23	23.96	20.350	22.390	21.130

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	27.57	33.53	28.14	20.092	22.704	21.509
	6145	39	26.74	31.09	27.75	20.438	23.248	20.839
	6385	87	27.61	30.77	25.15	20.203	22.746	20.761
UNII7	6625	135	27.23	32.03	28.79	20.119	23.743	21.332
	6705	151	28.58	32.45	27.40	20.575	23.445	21.147
	6785	167	26.92	31.05	28.69	20.517	23.207	20.788

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	27.65	33.51	29.32	20.254	21.709	20.819
	6145	39	28.77	34.59	30.05	20.544	22.259	19.920
	6385	87	28.46	34.76	30.10	20.271	22.916	20.875
UNII7	6625	135	28.11	34.89	28.00	19.723	22.500	21.085
	6705	151	28.76	31.81	28.59	20.258	20.782	20.555
	6785	167	28.87	33.43	28.36	20.420	22.873	20.679

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	32.09	35.02	32.01	22.806	23.560	22.871
	6145	39	44.05	35.17	32.26	22.962	23.562	22.947
	6385	87	44.95	35.78	33.06	23.252	23.047	23.071
UNII7	6625	135	33.44	34.43	35.76	22.601	23.507	23.757
	6705	151	44.25	35.28	43.43	22.636	23.350	22.861
	6785	167	44.07	35.21	43.09	22.955	23.589	22.465

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	69.37	-	72.99	53.748	-	44.371
	6145	39	69.32	-	71.48	55.073	-	44.136
	6385	87	67.69	-	70.72	54.109	-	43.739
UNII7	6625	135	69.47	-	72.53	53.655	-	44.644
	6705	151	69.19	-	70.46	54.813	-	44.622
	6785	167	69.56	-	72.23	55.113	-	43.977

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	88.64	-	-	78.088	-
	6145	39	-	88.20	-	-	78.090	-
	6385	87	-	88.01	-	-	78.082	-
UNII7	6625	135		88.73			77.986	
	6705	151	-	87.95	-	-	78.065	-
	6785	167		88.20			78.090	

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.78	-	-	77.746	-
	6145	39	-	88.76	-	-	77.729	-
	6385	87	-	86.50	-	-	77.844	-
UNII7	6625	135		88.50			77.772	
	6705	151	-	89.16	-	-	77.805	-
	6785	167		88.59			77.871	

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	23.46	26.63	28.00	24.940	26.410	27.463
	6185	47	24.31	24.47	26.70	29.698	26.950	27.971
	6345	79	24.10	25.42	27.79	22.935	25.368	25.978
UNII7	6665	143	26.30	28.99	29.45	22.904	26.007	28.253

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.97	33.34	33.40	23.395	26.546	28.458
	6185	47	28.45	35.63	29.32	23.143	26.296	28.088
	6345	79	28.56	36.81	28.39	24.863	26.524	26.666
UNII7	6665	143	30.91	32.42	35.69	25.472	28.104	29.134

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	32.99	35.63	36.04	24.829	26.551	26.614
	6185	47	33.69	35.70	35.79	26.379	25.928	25.023
	6345	79	33.75	35.47	36.56	25.069	25.364	25.551
UNII7	6665	143	30.64	39.88	36.91	24.297	26.367	25.975

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.60	73.42	46.75	32.386	30.769	27.930
	6185	47	88.32	74.38	46.77	33.268	30.938	28.874
	6345	79	38.91	44.37	47.85	29.946	28.825	28.340
UNII7	6665	143	88.35	71.47	45.78	30.130	28.083	27.686

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.92	-	106.4	48.069	-	52.597
	6185	47	88.07	-	108.3	48.269	-	51.539
	6345	79	88.00	-	106.8	49.030	-	51.121
UNII7	6665	143	88.47	-	106.9	46.155	-	51.959

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	144.3	-	-	81.033	-
	6185	47	-	140.0	-	-	80.826	-
	6345	79	-	141.0	-	-	80.840	-
UNII7	6665	143	-	140.7	-	-	80.590	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	28.51	22.28	24.89	27.392	29.551	27.352
	6185	47	26.69	25.21	29.26	28.908	28.531	27.009
	6345	79	24.76	31.23	26.93	25.384	29.261	23.183
UNII7	6665	143	26.91	26.88	25.97	26.308	29.270	25.648

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	33.79	32.12	30.72	26.888	29.633	25.652
	6185	47	32.96	36.27	29.48	27.117	30.888	24.665
	6345	79	31.45	36.06	31.60	27.537	32.509	26.035
UNII7	6665	143	31.31	31.16	28.86	27.813	30.732	25.281

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	41.11	39.00	35.16	27.035	30.616	24.267
	6185	47	36.36	39.27	28.80	27.028	28.920	21.876
	6345	79	40.83	42.05	34.62	28.305	29.605	24.689
UNII7	6665	143	36.51	40.47	29.71	27.875	30.784	24.656

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	50.05	51.72	85.85	32.317	30.198	29.529
	6185	47	50.16	50.56	42.05	32.290	30.251	28.807
	6345	79	52.29	50.06	85.29	32.669	30.814	28.323
UNII7	6665	143	50.49	52.02	48.25	32.160	31.448	32.270

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	102.9	-	88.50	60.825	-	53.476
	6185	47	96.99	-	88.06	59.241	-	50.703
	6345	79	101.9	-	88.09	59.619	-	52.013
UNII7	6665	143	95.94	-	88.05	52.009	-	52.312

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	134.4	-	-	83.425	-
	6185	47	-	132.3	-	-	81.144	-
	6345	79	-	135.2	-	-	81.349	-
UNII7	6665	143	-	129.9	-	-	81.370	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	176.1	-	-	157.44	-
	6185	47	-	175.8	-	-	157.20	-
	6345	79	-	172.9	-	-	157.19	-
UNII7	6665	143	-	173.8	-	-	157.23	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	174.0	-	-	157.23	-
	6185	47	-	173.9	-	-	157.22	-
	6345	79	-	173.5	-	-	157.07	-
UNII7	6665	143	-	173.8	-	-	156.88	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	163.5	35.39	104.9	161.03	105.24	90.460
	6265	63	168.7	38.68	36.44	165.28	49.137	46.787

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	31.37	44.57	108.9	38.736	42.510	85.388
	6265	63	33.76	32.45	35.52	39.170	39.562	44.949

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	170.4	140.3	114.0	73.241	128.55	60.994
	6265	63	170.3	49.22	108.2	75.886	45.864	51.787

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	174.5	164.7	134.5	163.49	133.64	107.64
	6265	63	172.2	162.8	133.9	162.32	148.68	113.32

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	179.8		150.6	162.70		130.09
	6265	63	180.2		157.5	163.60		130.42

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31		170.6			116.73	
	6265	63		173.7			143.68	

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	97.26	52.85	41.63	98.309	58.620	59.948
	6265	63	37.38	56.17	39.92	51.402	53.198	43.426

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	40.62	38.33	48.33	39.227	41.590	45.643
	6265	63	37.74	43.07	45.87	38.444	46.645	48.298

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.8	66.56	47.70	47.990	59.169	41.331
	6265	63	92.47	61.65	42.52	50.482	56.272	38.312

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	112.3	89.41	55.35	89.756	73.165	42.804
	6265	63	111.6	91.26	63.85	93.595	71.597	42.901

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	124.4		156.6	104.29		101.40
	6265	63	120.0		150.7	101.58		98.454

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31		178.7			110.91	
	6265	63		174.0			107.27	

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	36.03	67.02	90.27	48.003	66.321	98.089
	6265	63	39.19	63.96	94.17	41.421	49.581	57.175

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	46.96	46.24	92.27	41.992	42.743	47.715
	6265	63	46.94	46.08	90.00	45.978	46.502	55.654
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	57.17	73.66	97.14	45.914	55.489	50.167
	6265	63	48.01	70.98	46.81	42.117	64.364	44.191
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	78.34	69.31	108.7	53.275	52.713	93.463
	6265	63	81.71	68.79	108.4	52.022	53.794	92.304
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	104.7	-	106.4	77.936	-	93.591
	6265	63	98.47	-	106.5	75.562	-	93.633
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	178.8	-	-	96.336	-
	6265	63	-	179.5	-	-	96.797	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	101.5	31.85	166.0	100.66	105.44	157.64
	6265	63	105.0	29.30	32.59	101.76	47.910	55.139
Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	33.96	53.13	170.0	42.901	52.197	77.076
	6265	63	107.2	49.56	170.5	49.271	52.158	165.20

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	52.76	154.3	165.8	42.650	75.166	37.464
	6265	63	113.8	151.9	166.6	92.874	142.06	42.011
Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	131.1	142.7	173.0	115.38	128.83	164.45
	6265	63	128.6	143.2	179.1	111.58	128.63	165.61
Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	153.4		177.0	126.96		163.57
	6265	63	152.0		174.2	128.85		164.04
Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.7	-	-	113.14	-
	6265	63	-	172.4	-	-	107.42	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	266.9	-	-	209.82	-
	6265	63	-	269.7	-	-	227.01	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	290.4	-	-	230.12	-
	6265	63	-	290.5	-	-	229.61	-
Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	335.0	-	-	315.42	-
	6265	63	-	333.8	-	-	315.13	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	334.5	-	-	315.81	-
	6265	63	-	331.2	-	-	314.84	-


Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.96	-	-	16.592	-
	6175	45	-	20.81	-	-	16.592	-
	6415	93	-	21.04	-	-	16.568	-
UNII7	6535	117	-	21.01	-	-	16.586	-
	6695	149	-	20.98	-	-	16.577	-
	6855	181	-	20.80	-	-	16.585	-

☐ Test Plots(26dB & 99% Bandwidth)
[Indoor Cilent, Very Low Power Device]


Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]

802.11be EHT20M Ch.2(5935 MHz) SU

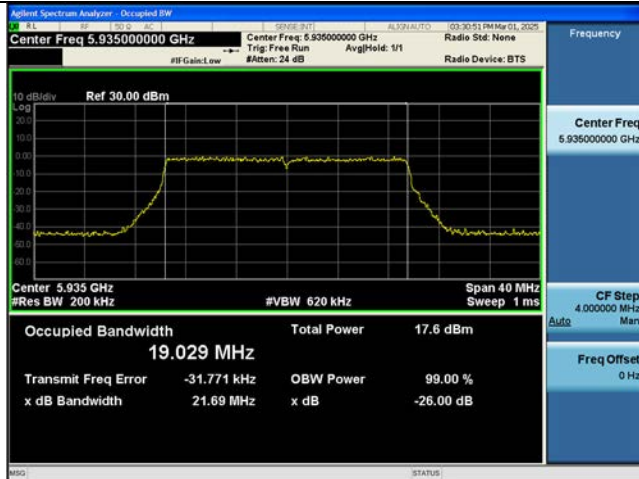


802.11be EHT40M Ch.91(6405 MHz) SU

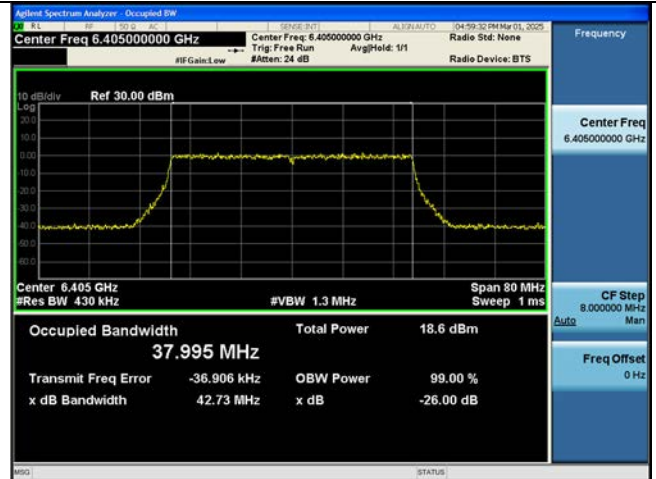

802.11be EHT80M Ch.199(6945 MHz) SU




802.11be EHT160M Ch.15(6025 MHz) SU

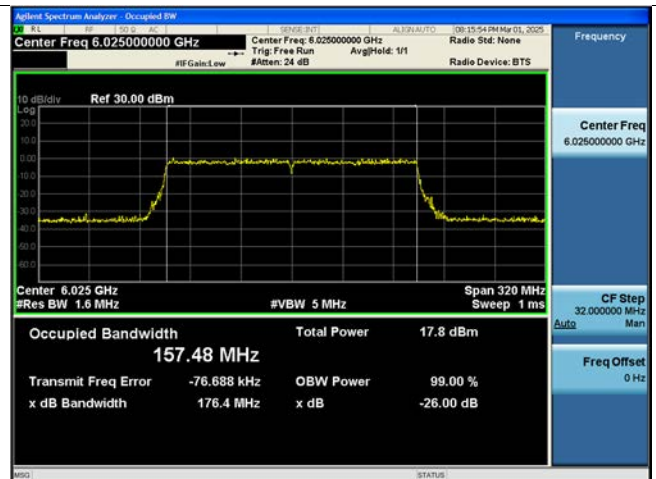

Bandwidth 320M, Ch. 31(6105 MHz) SU




802.11a Ch.185(6875 MHz)

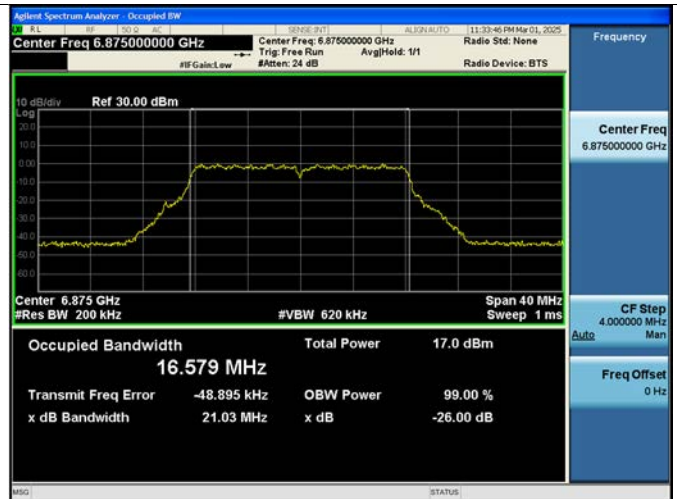


[Ant.2]


802.11be EHT20M Ch.97(6435 MHz) SU

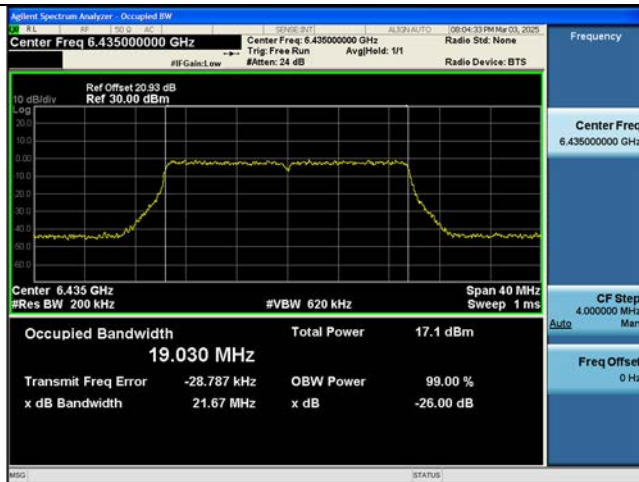

802.11be EHT40M Ch.115(6525 MHz) SU

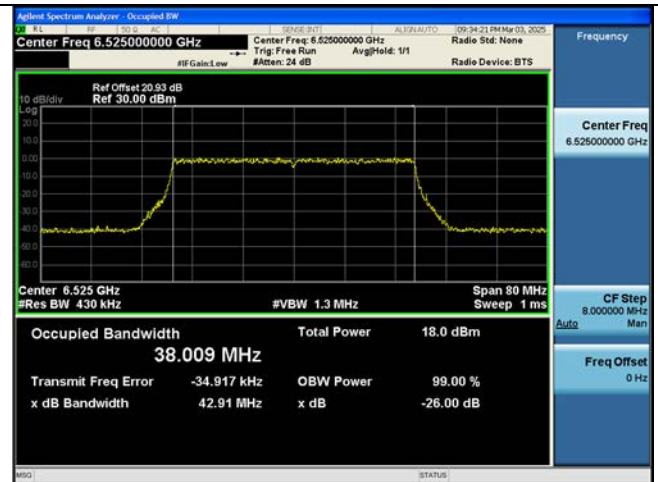


802.11be EHT80M Ch.151(6705 MHz) SU

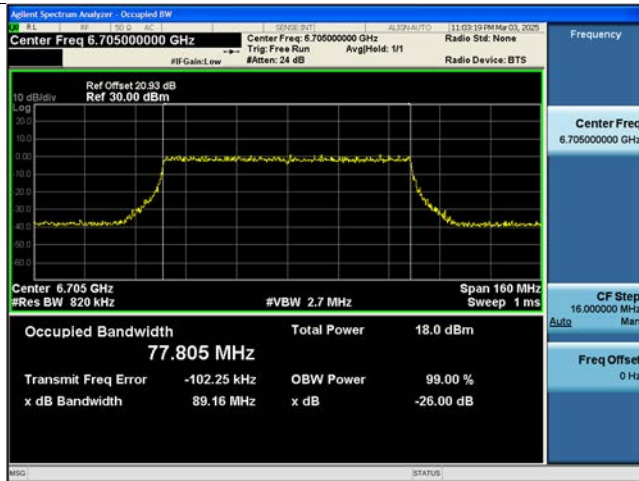


802.11be EHT160M Ch.15(6025 MHz) SU



Bandwidth 320M, Ch. 31(6105 MHz) 4x996 Tones 69 RU

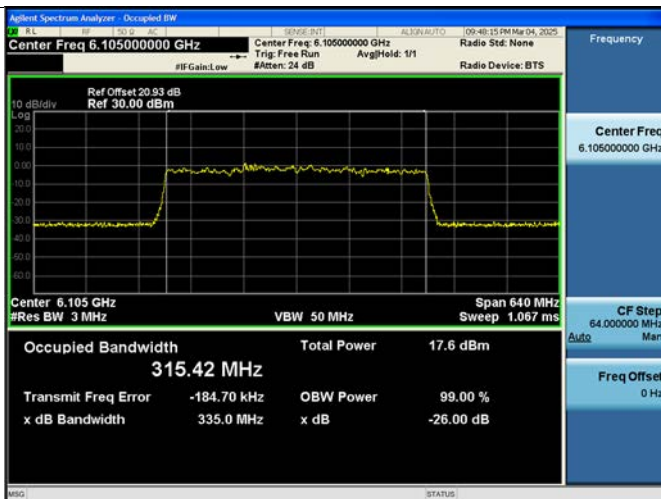

802.11a Ch.97(6435 MHz)

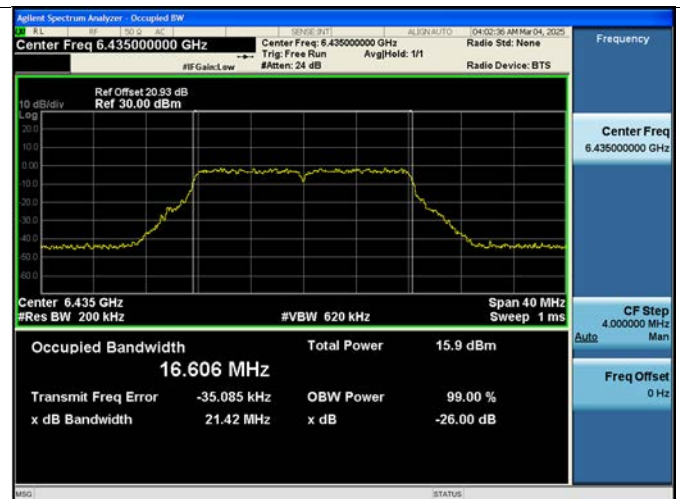


[Standard Client]


Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]

802.11be EHT20M Ch.2(5935 MHz) SU

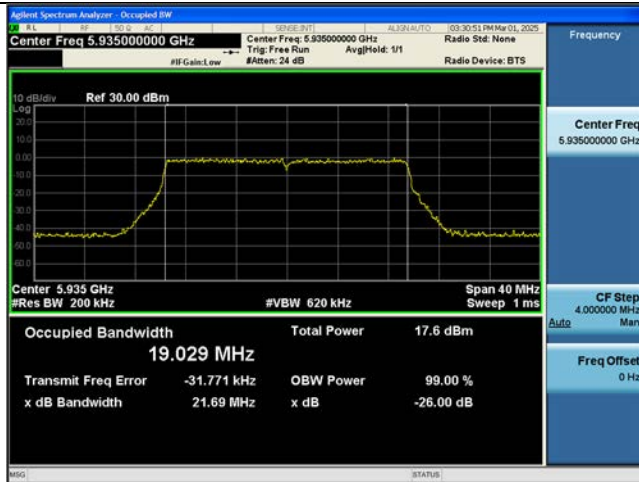

802.11be EHT40M Ch.91(6405 MHz) SU

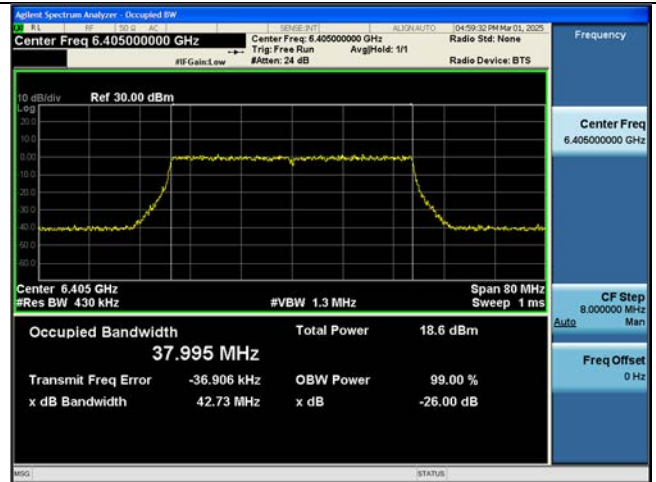


802.11be EHT80M Ch.167(6785 MHz) SU




802.11be EHT160M Ch.15(6025 MHz) SU



Bandwidth 320M, Ch. 31(6105 MHz) SU

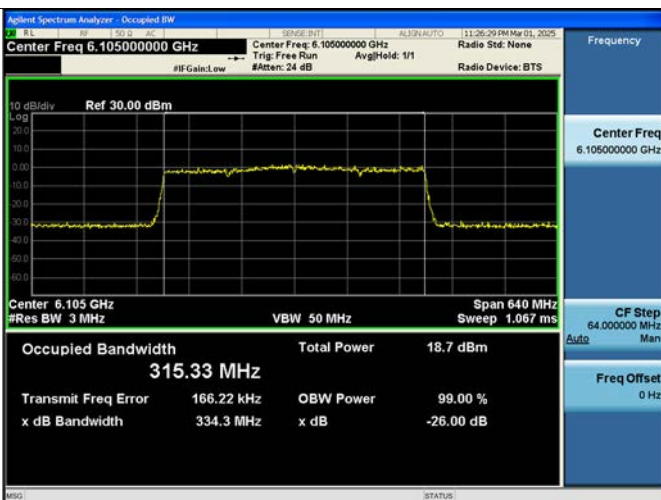


802.11a Ch.93(6415 MHz)

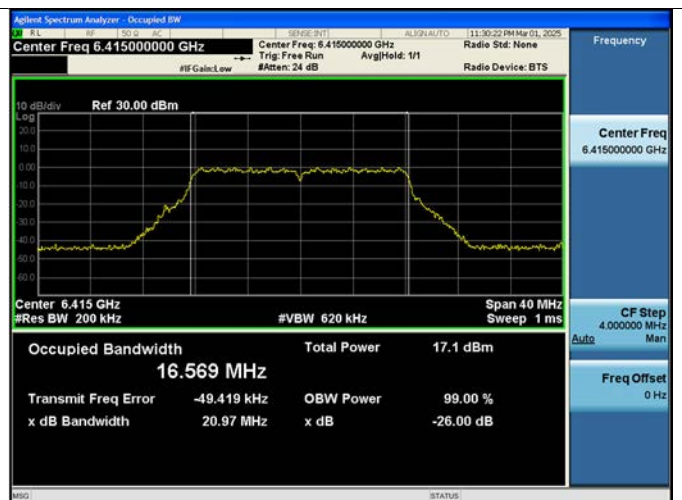


[Ant.2]


802.11be EHT20M Ch.117(6535 MHz) SU

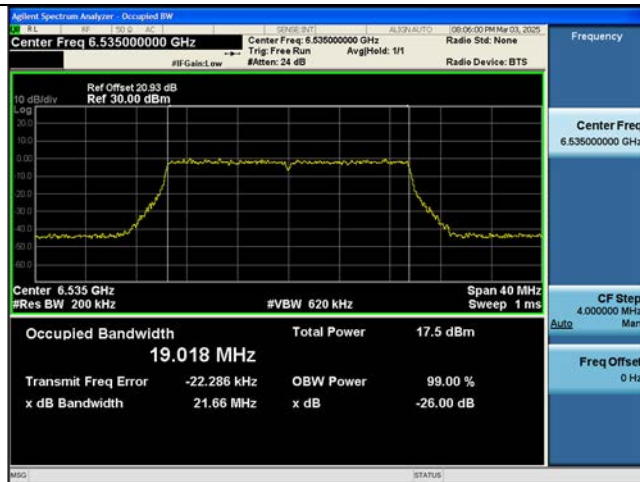


802.11be EHT40M Ch.43(6165 MHz) SU

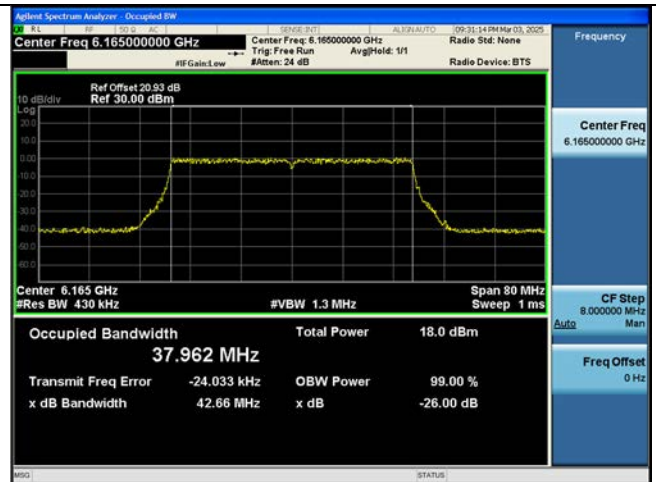


802.11be EHT80M Ch.151(6705 MHz) SU

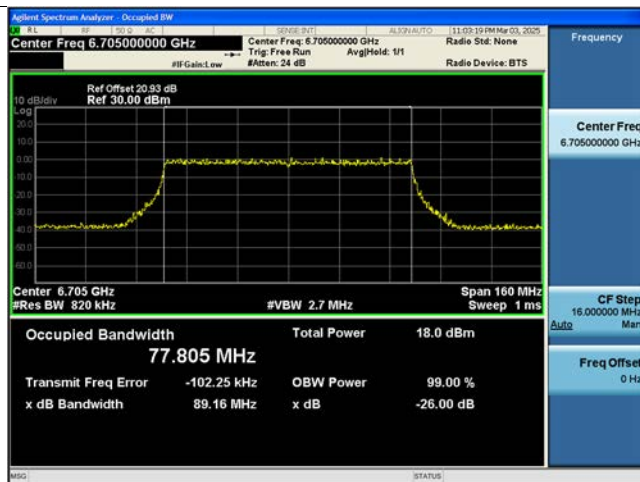


802.11be EHT160M Ch.15(6025 MHz) SU

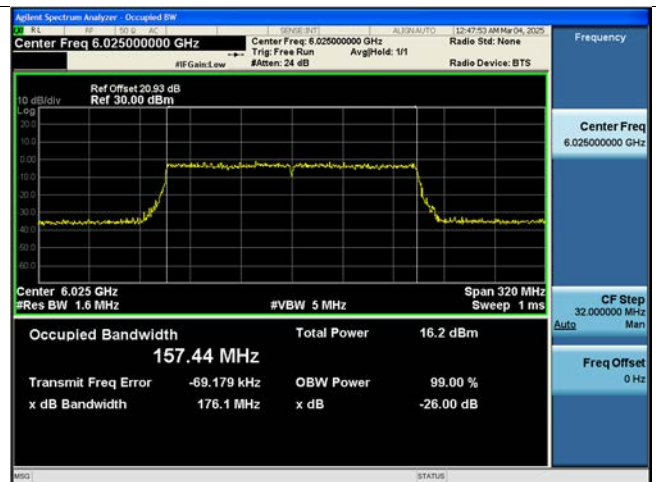

Bandwidth 320M, Ch. 31(6105 MHz) 4x996 Tones 69 RU

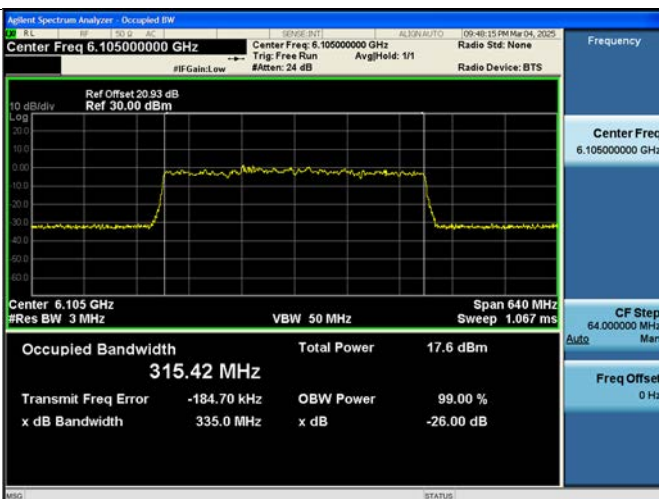

802.11a Ch.93(6415 MHz)

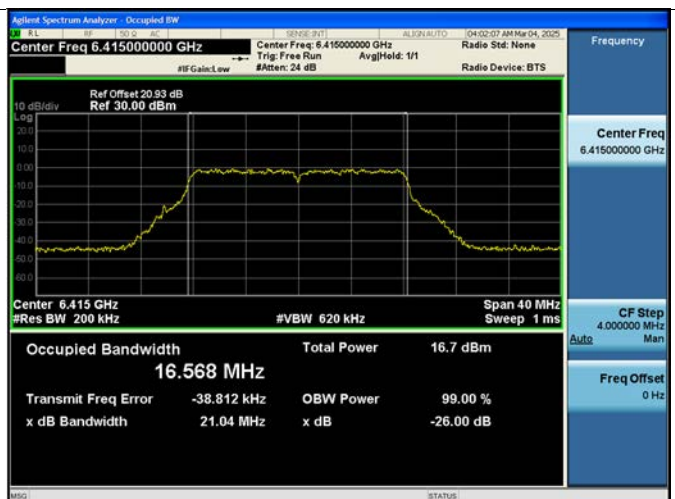

10.3 OUTPUT POWER MEASUREMENT

10.3.1 E.I.R.P Output Power(Indoor client)

Indoor client Limit : 24 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.3.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-0.67	-2.05	1.70	-1.13	-2.34	1.31	-0.77	-1.98	1.68	-10.07	-9.91	-6.98	-5.28	24
	6175	45	-1.65	-2.04	1.17	-2.01	-2.39	0.81	-1.70	-2.06	1.14	-10.07	-9.91	-6.98	-5.81	24
	6415	93	-2.32	-2.39	0.65	-2.64	-2.79	0.30	-2.21	-2.47	0.67	-10.07	-9.91	-6.98	-6.31	24
UNII6	6435	97	-2.18	-2.41	0.72	-2.52	-2.78	0.36	-2.14	-2.45	0.72	-10.38	-10.60	-7.48	-6.76	24
	6475	105	-2.30	-2.86	0.44	-2.62	-3.11	0.15	-2.20	-2.64	0.60	-10.38	-10.60	-7.48	-6.88	24
	6515	113	-2.24	-2.70	0.55	-2.60	-3.07	0.18	-2.21	-2.74	0.54	-10.38	-10.60	-7.48	-6.93	24
UNII7	6535	117	-2.28	-2.92	0.42	-2.59	-3.25	0.10	-2.19	-2.88	0.49	-10.38	-10.60	-7.48	-6.99	24
	6695	149	-2.07	-2.61	0.68	-2.48	-2.94	0.31	-2.17	-2.60	0.63	-10.38	-10.60	-7.48	-6.80	24
	6855	181	-1.83	-2.96	0.65	-2.21	-3.34	0.27	-1.87	-2.99	0.61	-10.38	-10.60	-7.48	-6.83	24
UNII8	6875	185	-1.91	-3.07	0.56	-2.27	-3.40	0.21	-1.94	-3.05	0.55	-10.50	-10.12	-7.30	-6.74	24
	6995	209	-1.50	-2.95	0.85	-1.86	-3.28	0.50	-1.50	-2.93	0.85	-10.50	-10.12	-7.30	-6.45	24
	7115	233	-0.13	-3.58	1.49	-0.49	-3.89	1.15	-0.14	-3.46	1.52	-10.50	-10.12	-7.30	-5.78	24

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	2.54	0.88	4.80	2.35	0.61	4.58	2.48	0.71	4.70	-10.07	-9.91	-6.98	-2.18	24
	6175	45	1.77	0.86	4.35	1.59	0.64	4.16	1.85	0.83	4.38	-10.07	-9.91	-6.98	-2.60	24
	6415	93	0.86	0.96	3.92	0.66	0.76	3.72	0.89	0.96	3.94	-10.07	-9.91	-6.98	-3.04	24
UNII6	6435	97	0.95	1.04	4.00	0.76	0.82	3.80	0.98	1.01	4.00	-10.38	-10.60	-7.48	-3.47	24
	6475	105	0.99	1.03	4.02	0.81	1.16	4.00	1.02	1.38	4.21	-10.38	-10.60	-7.48	-3.27	24
	6515	113	0.35	0.60	3.49	0.10	0.32	3.22	0.26	0.51	3.39	-10.38	-10.60	-7.48	-3.99	24
UNII7	6535	117	0.62	0.66	3.65	0.44	0.45	3.46	0.70	0.64	3.68	-10.38	-10.60	-7.48	-3.80	24
	6695	149	0.92	0.49	3.72	0.67	0.27	3.49	0.78	0.41	3.61	-10.38	-10.60	-7.48	-3.76	24
	6855	181	0.64	-0.48	3.13	0.40	-0.73	2.88	0.53	-0.53	3.04	-10.38	-10.60	-7.48	-4.35	24
UNII8	6875	185	0.48	-0.57	3.00	0.26	-0.76	2.79	0.40	-0.46	3.00	-10.50	-10.12	-7.30	-4.30	24
	6995	209	0.08	-0.41	2.85	-0.08	-0.60	2.68	0.13	-0.26	2.95	-10.50	-10.12	-7.30	-4.35	24
	7115	233	2.07	0.06	4.19	1.86	-0.10	4.00	2.08	0.24	4.27	-10.50	-10.12	-7.30	-3.03	24

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	4.86	4.60	7.74	-	-	-	4.76	4.51	7.65	-10.07	-9.91	-6.98	0.76	24
	6175	45	5.69	5.27	8.50	-	-	-	5.73	5.25	8.51	-10.07	-9.91	-6.98	1.53	24
	6415	93	5.77	5.32	8.56	-	-	-	5.80	5.32	8.58	-10.07	-9.91	-6.98	1.60	24
UNII6	6435	97	5.98	4.26	8.21	-	-	-	5.98	4.21	8.19	-10.38	-10.60	-7.48	0.73	24
	6475	105	5.27	3.96	7.68	-	-	-	5.27	4.01	7.70	-10.38	-10.60	-7.48	0.22	24
	6515	113	4.99	4.47	7.74	-	-	-	4.92	4.38	7.67	-10.38	-10.60	-7.48	0.26	24
UNII7	6535	117	5.01	4.34	7.70	-	-	-	5.04	4.33	7.71	-10.38	-10.60	-7.48	0.23	24
	6695	149	5.33	5.06	8.21	-	-	-	5.23	4.99	8.12	-10.38	-10.60	-7.48	0.73	24
	6855	181	5.48	4.87	8.19	-	-	-	5.38	4.88	8.15	-10.38	-10.60	-7.48	0.72	24
UNII8	6875	185	5.31	4.87	8.11	-	-	-	5.25	4.90	8.09	-10.50	-10.12	-7.30	0.81	24
	6995	209	5.55	5.06	8.32	-	-	-	5.55	5.18	8.38	-10.50	-10.12	-7.30	1.08	24
	7115	233	5.30	4.54	7.95	-	-	-	5.30	4.67	8.01	-10.50	-10.12	-7.30	0.71	24

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	10.15	9.74	12.96	-	-	-	-10.07	-9.91	-6.98	5.98	24
	6175	45	-	-	-	10.68	9.60	13.18	-	-	-	-10.07	-9.91	-6.98	6.20	24
	6415	93	-	-	-	10.42	9.85	13.16	-	-	-	-10.07	-9.91	-6.98	6.18	24
UNII6	6435	97	-	-	-	10.32	9.11	12.77	-	-	-	-10.38	-10.60	-7.48	5.29	24
	6475	105	-	-	-	9.97	9.63	12.81	-	-	-	-10.38	-10.60	-7.48	5.33	24
	6515	113	-	-	-	10.39	9.78	13.11	-	-	-	-10.38	-10.60	-7.48	5.63	24
UNII7	6535	117	-	-	-	10.44	9.69	13.09	-	-	-	-10.38	-10.60	-7.48	5.61	24
	6695	149	-	-	-	10.31	10.04	13.19	-	-	-	-10.38	-10.60	-7.48	5.71	24
	6855	181	-	-	-	10.67	10.01	13.36	-	-	-	-10.38	-10.60	-7.48	5.88	24
UNII8	6875	185	-	-	-	10.33	10.03	13.19	-	-	-	-10.50	-10.12	-7.30	5.89	24
	6995	209	-	-	-	10.61	10.35	13.49	-	-	-	-10.50	-10.12	-7.30	6.20	24
	7115	233	-	-	-	10.43	9.77	13.12	-	-	-	-10.50	-10.12	-7.30	5.83	24

Mode: EHT20 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	7.88	7.90	10.90	-	-	-	-10.07	-9.91	-6.98	3.92	24
	6175	45	-	-	-	10.24	9.24	12.78	-	-	-	-10.07	-9.91	-6.98	5.80	24
	6415	93	-	-	-	9.97	9.51	12.76	-	-	-	-10.07	-9.91	-6.98	5.78	24
UNII6	6435	97	-	-	-	9.87	8.73	12.35	-	-	-	-10.38	-10.60	-7.48	4.87	24
	6475	105	-	-	-	9.60	9.28	12.45	-	-	-	-10.38	-10.60	-7.48	4.97	24
	6515	113	-	-	-	10.01	9.45	12.75	-	-	-	-10.38	-10.60	-7.48	5.27	24
UNII7	6535	117	-	-	-	10.07	9.32	12.72	-	-	-	-10.38	-10.60	-7.48	5.24	24
	6695	149	-	-	-	9.92	9.69	12.81	-	-	-	-10.38	-10.60	-7.48	5.34	24
	6855	181	-	-	-	10.28	9.66	12.99	-	-	-	-10.38	-10.60	-7.48	5.51	24
UNII8	6875	185	-	-	-	9.93	9.65	12.80	-	-	-	-10.50	-10.12	-7.30	5.50	24
	6995	209	-	-	-	10.23	9.99	13.12	-	-	-	-10.50	-10.12	-7.30	5.82	24
	7115	233	-	-	-	7.73	7.31	10.54	-	-	-	-10.50	-10.12	-7.30	3.24	24

Mode : EHT40 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-0.74	-2.12	1.63	-0.84	-2.20	1.54	-0.54	-1.87	1.85	-10.07	-9.91	-6.98	-5.13	24
	6165	43	-1.59	-1.97	1.23	-1.68	-2.13	1.11	-1.58	-2.01	1.22	-10.07	-9.91	-6.98	-5.75	24
	6405	91	-2.28	-2.25	0.74	-2.38	-2.48	0.58	-2.09	-2.38	0.78	-10.07	-9.91	-6.98	-6.20	24
UNII6	6445	99	-2.07	-2.35	0.80	-2.22	-2.56	0.62	-2.10	-2.37	0.78	-10.38	-10.60	-7.48	-6.68	24
	6485	107	-2.21	-2.79	0.52	-2.29	-2.72	0.51	-2.14	-2.51	0.69	-10.38	-10.60	-7.48	-6.79	24
	6525	115	-2.13	-2.64	0.63	-2.28	-2.86	0.45	-2.06	-2.70	0.64	-10.38	-10.60	-7.48	-6.84	24
UNII7	6565	123	-2.14	-2.89	0.51	-2.22	-2.91	0.46	-2.04	-2.63	0.68	-10.38	-10.60	-7.48	-6.80	24
	6685	147	-1.86	-2.36	0.91	-2.08	-2.42	0.76	-2.02	-2.26	0.87	-10.38	-10.60	-7.48	-6.57	24
	6845	179	-1.82	-2.69	0.78	-2.00	-2.98	0.55	-1.90	-2.84	0.67	-10.38	-10.60	-7.48	-6.70	24
UNII8	6885	187	-1.92	-2.98	0.59	-2.12	-3.12	0.42	-1.96	-2.99	0.56	-10.50	-10.12	-7.30	-6.71	24
	7005	211	-1.49	-2.89	0.87	-1.67	-3.08	0.70	-1.56	-2.90	0.83	-10.50	-10.12	-7.30	-6.43	24
	7085	227	-0.05	-3.31	1.63	-0.10	-3.48	1.54	-0.06	-3.37	1.60	-10.50	-10.12	-7.30	-5.67	24

Mode : EHT40 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	2.58	0.86	4.82	2.30	0.42	4.47	2.52	0.54	4.65	-10.07	-9.91	-6.98	-2.16	24
	6165	43	1.81	1.23	4.54	1.71	1.00	4.38	1.93	1.16	4.57	-10.07	-9.91	-6.98	-2.41	24
	6405	91	1.08	1.32	4.21	0.82	1.09	3.96	1.01	1.28	4.15	-10.07	-9.91	-6.98	-2.77	24
UNII6	6445	99	1.16	1.36	4.27	1.00	1.15	4.09	1.13	1.31	4.23	-10.38	-10.60	-7.48	-3.21	24
	6485	107	1.16	1.38	4.28	0.92	1.32	4.13	0.95	1.43	4.21	-10.38	-10.60	-7.48	-3.20	24
	6525	115	0.39	0.90	3.66	0.14	0.62	3.40	0.36	0.79	3.59	-10.38	-10.60	-7.48	-3.82	24
UNII7	6565	123	0.25	0.43	3.35	0.04	0.24	3.15	0.11	0.39	3.26	-10.38	-10.60	-7.48	-4.13	24
	6685	147	0.90	0.89	3.90	0.51	0.62	3.57	0.54	0.74	3.65	-10.38	-10.60	-7.48	-3.57	24
	6845	179	0.84	-0.11	3.40	0.50	-0.33	3.11	0.53	-0.16	3.21	-10.38	-10.60	-7.48	-4.08	24
UNII8	6885	187	0.50	-0.24	3.16	0.20	-0.33	2.95	0.30	-0.10	3.12	-10.50	-10.12	-7.30	-4.14	24
	7005	211	0.20	-0.26	2.99	-0.02	-0.21	2.89	0.07	0.07	3.08	-10.50	-10.12	-7.30	-4.22	24
	7085	227	2.19	0.10	4.28	1.92	0.03	4.09	2.03	0.33	4.27	-10.50	-10.12	-7.30	-3.02	24

Mode : EHT40 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	4.76	3.77	7.30	4.54	3.46	7.04	4.90	3.67	7.34	-10.07	-9.91	-6.98	0.36	24
	6165	43	5.43	5.33	8.39	5.33	5.16	8.26	5.50	5.31	8.42	-10.07	-9.91	-6.98	1.44	24
	6405	91	5.57	5.36	8.48	5.37	5.21	8.30	5.54	5.34	8.45	-10.07	-9.91	-6.98	1.50	24
UNII6	6445	99	5.91	4.38	8.22	5.78	4.22	8.08	5.92	4.34	8.21	-10.38	-10.60	-7.48	0.74	24
	6485	107	5.14	4.35	7.77	4.98	4.28	7.65	5.07	4.46	7.79	-10.38	-10.60	-7.48	0.31	24
	6525	115	4.90	4.49	7.71	4.70	4.28	7.50	4.97	4.37	7.69	-10.38	-10.60	-7.48	0.23	24
UNII7	6565	123	5.19	5.14	8.18	5.03	4.96	8.01	5.15	5.12	8.14	-10.38	-10.60	-7.48	0.70	24
	6685	147	5.36	5.12	8.25	5.13	4.94	8.05	5.18	5.00	8.10	-10.38	-10.60	-7.48	0.77	24
	6845	179	5.45	5.02	8.25	5.22	4.81	8.03	5.31	4.93	8.14	-10.38	-10.60	-7.48	0.77	24
UNII8	6885	187	5.33	4.87	8.11	5.11	4.81	7.97	5.25	5.00	8.14	-10.50	-10.12	-7.30	0.84	24
	7005	211	5.39	4.99	8.20	5.22	4.94	8.09	5.37	5.21	8.30	-10.50	-10.12	-7.30	1.00	24
	7085	227	5.08	4.93	8.01	4.88	4.88	7.89	5.01	5.06	8.05	-10.50	-10.12	-7.30	0.75	24

Mode : EHT40 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	9.79	9.42	12.62	-	-	-	9.94	9.38	12.68	-10.07	-9.91	-6.98	5.70	24
	6165	43	10.40	9.56	13.01	-	-	-	10.44	9.58	13.04	-10.07	-9.91	-6.98	6.06	24
	6405	91	10.20	9.52	12.88	-	-	-	10.18	9.55	12.89	-10.07	-9.91	-6.98	5.91	24
UNII6	6445	99	10.14	9.22	12.72	-	-	-	10.16	9.23	12.73	-10.38	-10.60	-7.48	5.25	24
	6485	107	10.20	9.78	13.00	-	-	-	10.17	9.87	13.03	-10.38	-10.60	-7.48	5.55	24
	6525	115	10.26	9.77	13.04	-	-	-	10.33	9.67	13.02	-10.38	-10.60	-7.48	5.56	24
UNII7	6565	123	9.85	10.46	13.18	-	-	-	9.84	10.46	13.17	-10.38	-10.60	-7.48	5.70	24
	6685	147	10.32	10.00	13.18	-	-	-	10.20	9.92	13.07	-10.38	-10.60	-7.48	5.70	24
	6845	179	10.60	10.05	13.34	-	-	-	10.53	9.97	13.27	-10.38	-10.60	-7.48	5.87	24
UNII8	6885	187	10.38	9.98	13.20	-	-	-	10.36	10.06	13.22	-10.50	-10.12	-7.30	5.93	24
	7005	211	10.43	10.11	13.29	-	-	-	10.46	10.25	13.37	-10.50	-10.12	-7.30	6.07	24
	7085	227	9.95	9.94	12.96	-	-	-	9.93	10.01	12.98	-10.50	-10.12	-7.30	5.68	24

Mode : EHT40 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	12.05	11.30	14.70	-	-	-	-10.07	-9.91	-6.98	7.72	24
	6165	43	-	-	-	12.30	11.66	15.00	-	-	-	-10.07	-9.91	-6.98	8.02	24
	6405	91	-	-	-	12.19	11.59	14.91	-	-	-	-10.07	-9.91	-6.98	7.93	24
UNII6	6445	99	-	-	-	12.55	11.02	14.86	-	-	-	-10.38	-10.60	-7.48	7.38	24
	6485	107	-	-	-	12.22	11.62	14.94	-	-	-	-10.38	-10.60	-7.48	7.46	24
	6525	115	-	-	-	12.07	11.59	14.85	-	-	-	-10.38	-10.60	-7.48	7.37	24
UNII7	6565	123	-	-	-	12.27	12.41	15.35	-	-	-	-10.38	-10.60	-7.48	7.87	24
	6685	147	-	-	-	12.44	11.95	15.21	-	-	-	-10.38	-10.60	-7.48	7.73	24
	6845	179	-	-	-	12.60	12.03	15.33	-	-	-	-10.38	-10.60	-7.48	7.86	24
UNII8	6885	187	-	-	-	12.37	12.01	15.20	-	-	-	-10.50	-10.12	-7.30	7.90	24
	7005	211	-	-	-	12.44	11.91	15.20	-	-	-	-10.50	-10.12	-7.30	7.90	24
	7085	227	-	-	-	12.08	11.90	15.00	-	-	-	-10.50	-10.12	-7.30	7.71	24

Mode: EHT40 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	11.79	10.99	14.42	-	-	-	-10.07	-9.91	-6.98	7.44	24
	6165	43	-	-	-	12.02	11.39	14.73	-	-	-	-10.07	-9.91	-6.98	7.75	24
	6405	91	-	-	-	11.89	11.29	14.61	-	-	-	-10.07	-9.91	-6.98	7.63	24
UNII6	6445	99	-	-	-	12.24	10.67	14.54	-	-	-	-10.38	-10.60	-7.48	7.06	24
	6485	107	-	-	-	11.90	11.35	14.64	-	-	-	-10.38	-10.60	-7.48	7.16	24
	6525	115	-	-	-	11.76	11.27	14.53	-	-	-	-10.38	-10.60	-7.48	7.05	24
UNII7	6565	123	-	-	-	11.94	12.13	15.04	-	-	-	-10.38	-10.60	-7.48	7.56	24
	6685	147	-	-	-	12.12	11.65	14.90	-	-	-	-10.38	-10.60	-7.48	7.43	24
	6845	179	-	-	-	12.30	11.74	15.04	-	-	-	-10.38	-10.60	-7.48	7.56	24
UNII8	6885	187	-	-	-	12.06	11.72	14.90	-	-	-	-10.50	-10.12	-7.30	7.61	24
	7005	211	-	-	-	12.10	11.58	14.86	-	-	-	-10.50	-10.12	-7.30	7.56	24
	7085	227	-	-	-	11.76	11.60	14.69	-	-	-	-10.50	-10.12	-7.30	7.39	24

Mode : EHT80 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-1.03	-2.47	1.32	-0.88	-2.26	1.49	-1.07	-2.19	1.42	-10.07	-9.91	-6.98	-5.49	24
	6145	39	-1.42	-2.62	1.04	-1.40	-2.81	0.96	-1.40	-2.86	0.95	-10.07	-9.91	-6.98	-5.94	24
	6385	87	-2.59	-2.63	0.40	-2.63	-2.60	0.40	-2.41	-2.66	0.48	-10.07	-9.91	-6.98	-6.50	24
UNII6	6465	103	-2.39	-2.61	0.51	-2.51	-2.68	0.42	-2.40	-2.42	0.60	-10.38	-10.60	-7.48	-6.88	24
	6545	119	-2.58	-3.08	0.18	-2.53	-3.16	0.18	-2.40	-2.89	0.37	-10.38	-10.60	-7.48	-7.11	24
UNII7	6625	135	-2.54	-2.52	0.48	-2.65	-2.67	0.35	-2.40	-2.53	0.54	-10.38	-10.60	-7.48	-6.94	24
	6705	151	-2.26	-2.68	0.54	-2.46	-2.63	0.47	-2.31	-2.67	0.53	-10.38	-10.60	-7.48	-6.94	24
	6785	167	-2.37	-3.22	0.24	-2.44	-3.16	0.22	-2.24	-3.10	0.36	-10.38	-10.60	-7.48	-7.11	24
UNII8	6865	183	-2.17	-3.05	0.42	-2.33	-3.25	0.25	-2.36	-3.29	0.21	-10.50	-10.12	-7.30	-6.87	24
	6945	199	-1.86	-2.77	0.72	-2.09	-3.00	0.49	-2.31	-3.00	0.37	-10.50	-10.12	-7.30	-6.58	24
	7025	215	-1.16	-3.42	0.86	-1.32	-3.48	0.74	-1.61	-3.54	0.54	-10.50	-10.12	-7.30	-6.44	24

Mode : EHT80 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	2.36	0.66	4.60	2.27	0.31	4.41	2.21	0.37	4.40	-10.07	-9.91	-6.98	-2.38	24
	6145	39	1.80	0.62	4.26	1.79	0.66	4.27	2.00	0.62	4.38	-10.07	-9.91	-6.98	-2.60	24
	6385	87	0.85	0.97	3.92	0.76	0.98	3.88	0.78	1.00	3.90	-10.07	-9.91	-6.98	-3.06	24
UNII6	6465	103	0.86	1.00	3.94	0.76	0.88	3.83	0.65	1.01	3.84	-10.38	-10.60	-7.48	-3.54	24
	6545	119	0.48	0.82	3.66	0.40	0.59	3.50	0.34	0.60	3.48	-10.38	-10.60	-7.48	-3.82	24
UNII7	6625	135	0.26	0.25	3.26	0.03	-0.01	3.02	0.13	0.01	3.08	-10.38	-10.60	-7.48	-4.21	24
	6705	151	0.61	0.48	3.55	0.21	0.30	3.26	0.25	0.19	3.23	-10.38	-10.60	-7.48	-3.92	24
	6785	167	0.39	-0.38	3.03	0.07	-0.45	2.82	0.16	-0.29	2.95	-10.38	-10.60	-7.48	-4.45	24
UNII8	6865	183	0.56	-0.47	3.08	0.14	-0.54	2.82	0.02	-0.38	2.83	-10.50	-10.12	-7.30	-4.21	24
	6945	199	0.78	-0.16	3.34	0.38	-0.19	3.11	0.18	-0.04	3.08	-10.50	-10.12	-7.30	-3.96	24
	7025	215	1.05	-0.55	3.33	0.82	-0.34	3.28	0.58	-0.10	3.26	-10.50	-10.12	-7.30	-3.97	24

Mode : EHT80 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	4.67	3.54	7.15	4.85	3.48	7.23	4.82	3.55	7.24	-10.07	-9.91	-6.98	0.26	24
	6145	39	5.26	5.09	8.18	5.35	5.24	8.30	5.44	5.23	8.35	-10.07	-9.91	-6.98	1.37	24
	6385	87	5.64	5.38	8.52	5.52	5.54	8.54	5.46	5.56	8.52	-10.07	-9.91	-6.98	1.56	24
UNII6	6465	103	5.15	3.93	7.60	5.10	3.90	7.55	5.02	4.03	7.57	-10.38	-10.60	-7.48	0.12	24
	6545	119	4.83	4.40	7.63	4.90	4.23	7.59	4.89	4.24	7.58	-10.38	-10.60	-7.48	0.15	24
UNII7	6625	135	5.11	5.07	8.10	5.07	4.83	7.96	5.19	4.79	8.00	-10.38	-10.60	-7.48	0.62	24
	6705	151	5.33	5.21	8.28	5.15	5.02	8.09	5.20	4.89	8.06	-10.38	-10.60	-7.48	0.80	24
	6785	167	5.53	4.15	7.90	5.41	4.07	7.80	5.54	4.19	7.93	-10.38	-10.60	-7.48	0.45	24
UNII8	6865	183	5.28	4.94	8.12	5.13	4.81	7.99	5.06	4.90	7.99	-10.50	-10.12	-7.30	0.83	24
	6945	199	5.61	4.91	8.28	5.50	4.85	8.20	5.38	4.94	8.17	-10.50	-10.12	-7.30	0.99	24
	7025	215	5.25	4.40	7.86	5.22	4.58	7.92	5.07	4.67	7.88	-10.50	-10.12	-7.30	0.62	24

Mode : EHT80 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	9.90	9.12	12.54	10.03	9.08	12.59	10.09	9.15	12.66	-10.07	-9.91	-6.98	5.68	24
	6145	39	10.37	9.50	12.97	10.36	9.53	12.98	10.53	9.66	13.13	-10.07	-9.91	-6.98	6.15	24
	6385	87	10.51	9.94	13.25	10.46	10.03	13.26	10.28	10.05	13.18	-10.07	-9.91	-6.98	6.28	24
UNII6	6465	103	10.05	9.66	12.87	10.04	9.62	12.85	9.94	9.75	12.86	-10.38	-10.60	-7.48	5.39	24
	6545	119	10.39	9.83	13.13	10.45	9.75	13.12	10.49	9.69	13.12	-10.38	-10.60	-7.48	5.65	24
UNII7	6625	135	9.94	10.49	13.23	9.94	10.41	13.19	10.04	10.21	13.13	-10.38	-10.60	-7.48	5.75	24
	6705	151	10.45	10.47	13.47	10.35	10.41	13.39	10.37	10.16	13.27	-10.38	-10.60	-7.48	5.99	24
	6785	167	10.48	9.33	12.95	10.47	9.35	12.96	10.53	9.41	13.02	-10.38	-10.60	-7.48	5.54	24
UNII8	6865	183	10.46	10.13	13.31	10.39	10.04	13.23	10.31	10.11	13.22	-10.50	-10.12	-7.30	6.01	24
	6945	199	10.88	10.15	13.54	10.84	10.11	13.50	10.70	10.15	13.44	-10.50	-10.12	-7.30	6.24	24
	7025	215	10.51	9.85	13.20	10.50	9.91	13.22	10.35	9.94	13.16	-10.50	-10.12	-7.30	5.93	24

Mode : EHT80 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	12.17	10.98	14.63	-	-	-	12.33	11.03	14.74	-10.07	-9.91	-6.98	7.76	24
	6145	39	12.23	11.62	14.95	-	-	-	12.41	11.77	15.11	-10.07	-9.91	-6.98	8.13	24
	6385	87	12.45	12.19	15.33	-	-	-	12.28	12.24	15.27	-10.07	-9.91	-6.98	8.35	24
UNII6	6465	103	12.47	11.49	15.01	-	-	-	12.41	11.57	15.02	-10.38	-10.60	-7.48	7.54	24
	6545	119	12.12	11.68	14.92	-	-	-	12.21	11.59	14.92	-10.38	-10.60	-7.48	7.44	24
UNII7	6625	135	12.29	12.48	15.40	-	-	-	12.34	12.24	15.30	-10.38	-10.60	-7.48	7.92	24
	6705	151	12.50	12.47	15.50	-	-	-	12.48	12.27	15.38	-10.38	-10.60	-7.48	8.02	24
	6785	167	12.61	11.23	14.98	-	-	-	12.63	11.25	15.00	-10.38	-10.60	-7.48	7.52	24
UNII8	6865	183	12.42	12.12	15.28	-	-	-	12.32	12.12	15.23	-10.50	-10.12	-7.30	7.98	24
	6945	199	12.76	12.15	15.48	-	-	-	12.65	12.15	15.42	-10.50	-10.12	-7.30	8.18	24
	7025	215	12.37	11.58	15.00	-	-	-	12.28	11.66	14.99	-10.50	-10.12	-7.30	7.70	24

Mode : EHT80 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	15.08	14.49	17.80	-	-	-	-10.07	-9.91	-6.98	10.82	24
	6145	39	-	-	-	15.15	14.20	17.71	-	-	-	-10.07	-9.91	-6.98	10.73	24
	6385	87	-	-	-	15.26	14.70	18.00	-	-	-	-10.07	-9.91	-6.98	11.02	24
UNII6	6465	103	-	-	-	15.41	15.07	18.25	-	-	-	-10.38	-10.60	-7.48	10.77	24
	6545	119	-	-	-	15.06	15.12	18.10	-	-	-	-10.38	-10.60	-7.48	10.62	24
UNII7	6625	135	-	-	-	15.18	15.33	18.27	-	-	-	-10.38	-10.60	-7.48	10.79	24
	6705	151	-	-	-	15.34	15.00	18.18	-	-	-	-10.38	-10.60	-7.48	10.70	24
	6785	167	-	-	-	15.57	15.11	18.36	-	-	-	-10.38	-10.60	-7.48	10.88	24
UNII8	6865	183	-	-	-	15.20	14.97	18.10	-	-	-	-10.50	-10.12	-7.30	10.80	24
	6945	199	-	-	-	15.57	15.02	18.32	-	-	-	-10.50	-10.12	-7.30	11.02	24
	7025	215	-	-	-	15.33	15.13	18.24	-	-	-	-10.50	-10.12	-7.30	10.94	24

Mode : EHT80 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	14.81	14.21	17.53	-	-	-	-10.07	-9.91	-6.98	10.55	24
	6145	39	-	-	-	14.90	13.93	17.45	-	-	-	-10.07	-9.91	-6.98	10.47	24
	6385	87	-	-	-	15.01	14.42	17.73	-	-	-	-10.07	-9.91	-6.98	10.75	24
UNII6	6465	103	-	-	-	15.21	14.80	18.02	-	-	-	-10.38	-10.60	-7.48	10.54	24
	6545	119	-	-	-	14.86	14.83	17.86	-	-	-	-10.38	-10.60	-7.48	10.38	24
UNII7	6625	135	-	-	-	14.96	15.06	18.02	-	-	-	-10.38	-10.60	-7.48	10.54	24
	6705	151	-	-	-	15.09	14.73	17.93	-	-	-	-10.38	-10.60	-7.48	10.45	24
	6785	167	-	-	-	15.35	14.82	18.10	-	-	-	-10.38	-10.60	-7.48	10.62	24
UNII8	6865	183	-	-	-	14.97	14.70	17.85	-	-	-	-10.50	-10.12	-7.30	10.55	24
	6945	199	-	-	-	15.36	14.73	18.07	-	-	-	-10.50	-10.12	-7.30	10.77	24
	7025	215	-	-	-	15.11	14.87	18.00	-	-	-	-10.50	-10.12	-7.30	10.71	24

Mode : EHT160(80L) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-1.64	-3.09	0.71	-0.95	-2.40	1.40	-1.01	-2.23	1.43	-10.07	-9.91	-6.98	-5.55	24
	6185	47	-2.24	-2.37	0.71	-1.86	-2.16	1.00	-1.82	-2.17	1.02	-10.07	-9.91	-6.98	-5.96	24
	6345	79	-2.53	-2.77	0.36	-2.36	-2.68	0.49	-2.10	-2.79	0.58	-10.07	-9.91	-6.98	-6.40	24
UNII6	6505	111	-2.70	-3.39	-0.02	-2.42	-3.03	0.30	-2.40	-2.75	0.44	-10.38	-10.60	-7.48	-7.04	24
UNII7	6665	143	-2.76	-2.93	0.16	-2.43	-2.61	0.49	-2.28	-2.48	0.64	-10.38	-10.60	-7.48	-6.84	24
UNII8	6825	175	-2.58	-3.61	-0.05	-2.28	-3.15	0.32	-2.16	-3.10	0.41	-10.50	-10.12	-7.30	-6.89	24
	6985	207	-1.79	-3.34	0.52	-1.62	-3.12	0.71	-1.84	-3.09	0.59	-10.50	-10.12	-7.30	-6.59	24

Mode : EHT160(80L) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.80	0.98	4.42	2.33	1.22	4.82	2.42	1.34	4.92	-10.07	-9.91	-6.98	-2.06	24
	6185	47	1.45	1.05	4.27	1.92	1.47	4.71	2.00	1.43	4.74	-10.07	-9.91	-6.98	-2.24	24
	6345	79	1.32	1.10	4.22	1.53	1.41	4.48	1.67	1.54	4.61	-10.07	-9.91	-6.98	-2.36	24
UNII6	6505	111	0.55	0.73	3.66	0.81	0.88	3.86	0.61	0.96	3.80	-10.38	-10.60	-7.48	-3.62	24
UNII7	6665	143	0.45	0.35	3.41	0.65	0.45	3.56	0.64	0.42	3.54	-10.38	-10.60	-7.48	-3.92	24
UNII8	6825	175	0.57	0.13	3.37	0.60	0.49	3.56	0.60	0.65	3.64	-10.50	-10.12	-7.30	-3.66	24
	6985	207	0.56	-0.30	3.16	0.55	0.10	3.34	0.28	0.29	3.30	-10.50	-10.12	-7.30	-3.96	24

Mode : EHT160(80L) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	3.20	2.33	5.80	3.64	2.45	6.10	3.72	2.58	6.20	-10.07	-9.91	-6.98	-0.78	24
	6185	47	5.45	5.36	8.42	5.65	5.56	8.62	5.71	5.64	8.69	-10.07	-9.91	-6.98	1.71	24
	6345	79	5.38	5.29	8.35	5.23	5.34	8.30	5.38	5.43	8.42	-10.07	-9.91	-6.98	1.44	24
UNII6	6505	111	5.00	4.49	7.76	4.99	4.49	7.76	4.90	4.64	7.78	-10.38	-10.60	-7.48	0.30	24
UNII7	6665	143	5.15	4.33	7.77	5.23	4.14	7.73	5.33	4.09	7.76	-10.38	-10.60	-7.48	0.29	24
UNII8	6825	175	5.49	5.02	8.27	5.46	4.99	8.24	5.56	5.12	8.36	-10.50	-10.12	-7.30	1.06	24
	6985	207	5.45	5.23	8.35	5.45	5.27	8.37	5.33	5.34	8.34	-10.50	-10.12	-7.30	1.07	24

Mode : EHT160(80L) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	10.10	9.24	12.70	10.29	9.26	12.82	10.44	9.40	12.96	-10.07	-9.91	-6.98	5.98	24
	6185	47	10.39	9.53	12.99	10.39	9.55	13.00	10.59	9.72	13.19	-10.07	-9.91	-6.98	6.21	24
	6345	79	10.55	10.23	13.40	10.40	10.21	13.32	10.45	10.31	13.39	-10.07	-9.91	-6.98	6.42	24
UNII6	6505	111	10.47	9.84	13.18	10.47	9.76	13.14	10.38	9.90	13.16	-10.38	-10.60	-7.48	5.70	24
UNII7	6665	143	10.06	9.63	12.86	10.09	9.57	12.84	10.23	9.38	12.84	-10.38	-10.60	-7.48	5.38	24
UNII8	6825	175	10.74	10.17	13.47	10.70	10.11	13.43	10.78	10.25	13.53	-10.50	-10.12	-7.30	6.24	24
	6985	207	10.62	10.14	13.39	10.59	10.12	13.37	10.46	10.16	13.32	-10.50	-10.12	-7.30	6.10	24

Mode : EHT160(80L) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.13	11.14	14.67	-	-	-	12.40	11.25	14.87	-10.07	-9.91	-6.98	7.89	24
	6185	47	12.28	11.77	15.04	-	-	-	12.46	11.95	15.22	-10.07	-9.91	-6.98	8.25	24
	6345	79	12.52	12.47	15.50	-	-	-	12.46	12.51	15.50	-10.07	-9.91	-6.98	8.52	24
UNII6	6505	111	12.22	11.74	14.99	-	-	-	12.14	11.77	14.97	-10.38	-10.60	-7.48	7.51	24
UNII7	6665	143	12.30	11.56	14.96	-	-	-	12.41	11.34	14.92	-10.38	-10.60	-7.48	7.48	24
UNII8	6825	175	12.67	12.20	15.45	-	-	-	12.67	12.21	15.46	-10.50	-10.12	-7.30	8.16	24
	6985	207	12.54	12.48	15.52	-	-	-	12.41	12.49	15.46	-10.50	-10.12	-7.30	8.22	24

Mode : EHT160(80L) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.11	14.40	17.78	-	-	-	-10.07	-9.91	-6.98	10.80	24
	6185	47	-	-	-	15.27	14.53	17.93	-	-	-	-10.07	-9.91	-6.98	10.95	24
	6345	79	-	-	-	15.46	14.86	18.18	-	-	-	-10.07	-9.91	-6.98	11.20	24
UNII6	6505	111	-	-	-	15.15	15.23	18.20	-	-	-	-10.38	-10.60	-7.48	10.72	24
UNII7	6665	143	-	-	-	15.29	14.78	18.05	-	-	-	-10.38	-10.60	-7.48	10.57	24
UNII8	6825	175	-	-	-	15.55	15.05	18.31	-	-	-	-10.50	-10.12	-7.30	11.02	24
	6985	207	-	-	-	15.50	15.45	18.48	-	-	-	-10.50	-10.12	-7.30	11.19	24

Mode : EHT160(80U) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-1.02	-2.30	1.40	-0.74	-2.21	1.60	-1.13	-2.56	1.22	-10.07	-9.91	-6.98	-5.38	24
	6185	47	-1.83	-2.29	0.95	-1.88	-2.58	0.80	-2.01	-2.81	0.61	-10.07	-9.91	-6.98	-6.03	24
	6345	79	-2.07	-2.83	0.57	-2.08	-2.77	0.60	-2.17	-3.15	0.38	-10.07	-9.91	-6.98	-6.38	24
UNII6	6505	111	-2.43	-2.78	0.41	-2.34	-2.93	0.39	-2.54	-2.93	0.28	-10.38	-10.60	-7.48	-7.07	24
UNII7	6665	143	-2.22	-2.48	0.66	-2.44	-2.59	0.50	-2.67	-3.09	0.13	-10.38	-10.60	-7.48	-6.81	24
UNII8	6825	175	-2.07	-3.11	0.45	-2.22	-3.31	0.28	-2.57	-3.71	-0.09	-10.50	-10.12	-7.30	-6.85	24
	6985	207	-1.87	-3.11	0.57	-1.96	-3.17	0.49	-2.60	-3.55	-0.04	-10.50	-10.12	-7.30	-6.73	24

Mode : EHT160(80U) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	2.43	1.40	4.95	2.67	1.24	5.02	2.48	0.92	4.78	-10.07	-9.91	-6.98	-1.96	24
	6185	47	2.13	1.47	4.83	2.12	1.46	4.81	2.11	1.28	4.73	-10.07	-9.91	-6.98	-2.15	24
	6345	79	1.74	1.57	4.67	1.70	1.58	4.65	1.42	1.28	4.36	-10.07	-9.91	-6.98	-2.31	24
UNII6	6505	111	0.64	0.96	3.82	0.63	0.72	3.69	0.22	0.47	3.36	-10.38	-10.60	-7.48	-3.66	24
UNII7	6665	143	0.66	0.46	3.57	0.28	0.29	3.30	-0.02	-0.10	2.95	-10.38	-10.60	-7.48	-3.91	24
UNII8	6825	175	0.64	0.60	3.63	0.25	0.53	3.40	-0.22	0.40	3.11	-10.50	-10.12	-7.30	-3.66	24
	6985	207	0.30	0.33	3.33	0.10	0.63	3.38	-0.42	0.55	3.11	-10.50	-10.12	-7.30	-3.91	24

Mode : EHT160(80U) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	3.76	2.71	6.27	3.84	2.47	6.22	3.75	2.19	6.05	-10.07	-9.91	-6.98	-0.71	24
	6185	47	5.69	5.66	8.69	5.70	5.80	8.76	5.77	5.90	8.85	-10.07	-9.91	-6.98	1.87	24
	6345	79	5.40	5.44	8.43	5.28	5.56	8.43	5.15	5.50	8.34	-10.07	-9.91	-6.98	1.45	24
UNII6	6505	111	4.91	4.54	7.74	5.09	4.43	7.78	4.92	4.31	7.63	-10.38	-10.60	-7.48	0.31	24
UNII7	6665	143	5.41	4.09	7.81	5.26	3.97	7.67	5.23	3.71	7.54	-10.38	-10.60	-7.48	0.33	24
UNII8	6825	175	5.63	5.08	8.37	5.51	5.00	8.27	5.34	5.01	8.19	-10.50	-10.12	-7.30	1.08	24
	6985	207	5.35	5.39	8.38	5.38	5.63	8.52	5.16	5.63	8.42	-10.50	-10.12	-7.30	1.22	24

Mode: EHT160(80U) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	10.48	9.46	13.01	10.59	9.48	13.08	10.73	9.53	13.18	-10.07	-9.91	-6.98	6.20	24
	6185	47	10.55	9.71	13.16	10.51	9.76	13.16	10.67	9.95	13.33	-10.07	-9.91	-6.98	6.36	24
	6345	79	10.50	10.33	13.43	10.44	10.39	13.42	10.27	10.40	13.34	-10.07	-9.91	-6.98	6.45	24
UNII6	6505	111	10.29	9.78	13.05	10.38	9.71	13.07	10.45	9.69	13.10	-10.38	-10.60	-7.48	5.62	24
UNII7	6665	143	10.19	9.37	12.81	10.11	9.28	12.73	10.13	9.07	12.64	-10.38	-10.60	-7.48	5.33	24
UNII8	6825	175	10.81	10.18	13.52	10.71	10.09	13.42	10.61	10.14	13.39	-10.50	-10.12	-7.30	6.22	24
	6985	207	10.44	10.23	13.35	10.46	10.38	13.43	10.34	10.42	13.39	-10.50	-10.12	-7.30	6.13	24

Mode : EHT160(80U) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.48	11.32	14.95	-	-	-	12.67	11.39	15.09	-10.07	-9.91	-6.98	8.11	24
	6185	47	12.40	11.96	15.19	-	-	-	12.49	12.12	15.32	-10.07	-9.91	-6.98	8.34	24
	6345	79	12.47	12.60	15.55	-	-	-	12.27	12.67	15.48	-10.07	-9.91	-6.98	8.57	24
UNII6	6505	111	12.05	11.63	14.86	-	-	-	12.17	11.58	14.90	-10.38	-10.60	-7.48	7.42	24
UNII7	6665	143	12.39	11.29	14.88	-	-	-	12.34	11.08	14.76	-10.38	-10.60	-7.48	7.40	24
UNII8	6825	175	12.71	12.16	15.45	-	-	-	12.58	12.17	15.39	-10.50	-10.12	-7.30	8.15	24
	6985	207	12.36	12.65	15.52	-	-	-	12.29	12.78	15.55	-10.50	-10.12	-7.30	8.25	24

Mode : EHT160(80U) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.39	14.57	18.01	-	-	-	-10.07	-9.91	-6.98	11.03	24
	6185	47	-	-	-	15.32	14.72	18.04	-	-	-	-10.07	-9.91	-6.98	11.06	24
	6345	79	-	-	-	15.35	15.03	18.20	-	-	-	-10.07	-9.91	-6.98	11.22	24
UNII6	6505	111	-	-	-	15.06	15.09	18.09	-	-	-	-10.38	-10.60	-7.48	10.61	24
UNII7	6665	143	-	-	-	15.30	14.52	17.94	-	-	-	-10.38	-10.60	-7.48	10.46	24
UNII8	6825	175	-	-	-	15.52	15.02	18.29	-	-	-	-10.50	-10.12	-7.30	10.99	24
	6985	207	-	-	-	15.31	15.59	18.46	-	-	-	-10.50	-10.12	-7.30	11.17	24

Mode : EHT160 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	13.66	12.45	16.11	-	-	-	-10.07	-9.91	-6.98	9.13	24
	6185	47	-	-	-	13.70	13.45	16.59	-	-	-	-10.07	-9.91	-6.98	9.61	24
	6345	79	-	-	-	13.84	13.13	16.51	-	-	-	-10.07	-9.91	-6.98	9.53	24
UNII6	6505	111	-	-	-	13.55	13.68	16.63	-	-	-	-10.38	-10.60	-7.48	9.15	24
UNII7	6665	143	-	-	-	13.73	13.20	16.49	-	-	-	-10.38	-10.60	-7.48	9.01	24
UNII8	6825	175	-	-	-	13.97	13.53	16.77	-	-	-	-10.50	-10.12	-7.30	9.47	24
	6985	207	-	-	-	13.80	14.03	16.93	-	-	-	-10.50	-10.12	-7.30	9.63	24

Mode : EHT160 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	14.32	13.08	16.76	-	-	-	-10.07	-9.91	-6.98	9.78	24
	6185	47	-	-	-	14.31	14.04	17.19	-	-	-	-10.07	-9.91	-6.98	10.21	24
	6345	79	-	-	-	14.47	13.73	17.13	-	-	-	-10.07	-9.91	-6.98	10.15	24
UNII6	6505	111	-	-	-	14.16	14.29	17.24	-	-	-	-10.38	-10.60	-7.48	9.76	24
UNII7	6665	143	-	-	-	14.36	13.79	17.10	-	-	-	-10.38	-10.60	-7.48	9.62	24
UNII8	6825	175	-	-	-	14.60	14.12	17.37	-	-	-	-10.50	-10.12	-7.30	10.07	24
	6985	207	-	-	-	14.45	14.61	17.54	-	-	-	-10.50	-10.12	-7.30	10.24	24

Mode : EHT320(80LL) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-2.67	-3.90	-0.23	-1.97	-3.29	0.43	-1.77	-2.86	0.73	-10.07	-9.91	-6.98	-6.25	24
	6265	63	-3.12	-2.80	0.05	-2.70	-2.53	0.40	-2.52	-2.32	0.59	-10.07	-9.91	-6.98	-6.39	24
UNII6	6425	95	-3.02	-2.97	0.02	-2.93	-2.81	0.14	-2.58	-2.76	0.34	-10.38	-10.60	-7.48	-7.14	24
	6585	127	-3.31	-4.17	-0.71	-3.03	-3.79	-0.38	-2.80	-3.32	-0.04	-10.38	-10.60	-7.48	-7.52	24
UNII8	6745	159	-3.31	-4.32	-0.77	-2.93	-3.88	-0.37	-2.55	-3.43	0.05	-10.50	-10.12	-7.30	-7.25	24
	6905	191	-3.13	-4.34	-0.68	-2.78	-3.86	-0.27	-2.41	-3.63	0.03	-10.50	-10.12	-7.30	-7.27	24

Mode : EHT320(80LL) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.20	-0.14	3.04	0.64	-0.10	3.30	0.92	0.26	3.61	-10.07	-9.91	-6.98	-3.37	24
	6265	63	-0.22	-0.16	2.82	0.15	0.30	3.23	0.51	0.46	3.50	-10.07	-9.91	-6.98	-3.48	24
UNII6	6425	95	0.16	0.04	3.11	0.38	0.36	3.38	0.62	0.66	3.65	-10.38	-10.60	-7.48	-3.83	24
	6585	127	-0.10	0.40	3.17	0.22	0.70	3.47	0.20	0.97	3.61	-10.38	-10.60	-7.48	-3.87	24
UNII8	6745	159	0.35	0.36	3.36	0.64	0.50	3.58	0.93	0.66	3.81	-10.50	-10.12	-7.30	-3.49	24
	6905	191	0.07	-0.40	2.85	0.16	-0.13	3.03	0.34	0.20	3.28	-10.50	-10.12	-7.30	-4.02	24

Mode : EHT320(80LL) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	4.90	5.13	8.03	5.33	5.18	8.27	5.46	5.41	8.44	-10.07	-9.91	-6.98	1.47	24
	6265	63	5.40	4.05	7.79	5.55	4.31	7.98	5.73	4.38	8.12	-10.07	-9.91	-6.98	1.14	24
UNII6	6425	95	5.96	4.17	8.17	5.93	4.18	8.16	5.97	4.31	8.23	-10.38	-10.60	-7.48	0.75	24
	6585	127	5.07	5.18	8.14	5.04	5.15	8.11	5.04	5.29	8.18	-10.38	-10.60	-7.48	0.70	24
UNII8	6745	159	5.24	5.12	8.19	5.31	4.93	8.14	5.53	5.05	8.31	-10.50	-10.12	-7.30	1.01	24
	6905	191	5.40	4.94	8.18	5.36	4.89	8.14	5.53	5.09	8.33	-10.50	-10.12	-7.30	1.03	24

Mode : EHT320(80LL) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	9.52	9.07	12.31	9.70	9.09	12.42	9.91	9.27	12.61	-10.07	-9.91	-6.98	5.63	24
	6265	63	10.34	9.48	12.94	10.31	9.52	12.94	10.54	9.69	13.14	-10.07	-9.91	-6.98	6.16	24
UNII6	6425	95	10.58	9.17	12.95	10.41	9.16	12.84	10.48	9.23	12.91	-10.38	-10.60	-7.48	5.47	24
	6585	127	10.03	10.73	13.40	10.03	10.65	13.36	9.89	10.76	13.36	-10.38	-10.60	-7.48	5.93	24
UNII8	6745	159	10.34	10.48	13.42	10.38	10.40	13.40	10.52	10.25	13.39	-10.50	-10.12	-7.30	6.13	24
	6905	191	10.82	10.23	13.54	10.77	10.22	13.51	10.84	10.25	13.57	-10.50	-10.12	-7.30	6.27	24

Mode : EHT320(80LL) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	11.67	11.35	14.52	-	-	-	11.94	11.45	14.71	-10.07	-9.91	-6.98	7.73	24
	6265	63	12.66	11.55	15.15	-	-	-	12.84	11.70	15.32	-10.07	-9.91	-6.98	8.34	24
UNII6	6425	95	12.88	11.07	15.08	-	-	-	12.84	11.12	15.08	-10.38	-10.60	-7.48	7.60	24
	6585	127	12.47	12.68	15.59	-	-	-	12.35	12.69	15.53	-10.38	-10.60	-7.48	8.11	24
UNII8	6745	159	12.56	12.10	15.35	-	-	-	12.64	11.88	15.29	-10.50	-10.12	-7.30	8.05	24
	6905	191	12.72	12.20	15.48	-	-	-	12.71	12.22	15.48	-10.50	-10.12	-7.30	8.19	24

Mode : EHT320(80LL) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.73	13.81	17.31	-	-	-	-10.07	-9.91	-6.98	10.33	24
	6265	63	-	-	-	15.81	14.71	18.31	-	-	-	-10.07	-9.91	-6.98	11.33	24
UNII6	6425	95	-	-	-	15.90	14.71	18.35	-	-	-	-10.38	-10.60	-7.48	10.88	24
	6585	127	-	-	-	15.28	15.62	18.47	-	-	-	-10.38	-10.60	-7.48	10.99	24
UNII8	6745	159	-	-	-	15.55	15.96	18.77	-	-	-	-10.50	-10.12	-7.30	11.47	24
	6905	191	-	-	-	15.53	15.09	18.33	-	-	-	-10.50	-10.12	-7.30	11.03	24

Mode : EHT320(80LM) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-1.68	-2.85	0.78	-0.61	-1.81	1.84	-0.08	-1.16	2.42	-10.07	-9.91	-6.98	-4.56	24
	6265	63	-2.46	-2.33	0.61	-1.67	-1.79	1.28	-0.86	-1.06	2.05	-10.07	-9.91	-6.98	-4.93	24
UNII6	6425	95	-2.46	-2.73	0.42	-1.71	-1.71	1.30	-1.10	-1.13	1.89	-10.38	-10.60	-7.48	-5.59	24
	6585	127	-2.64	-3.38	0.02	-1.76	-2.49	0.90	-1.10	-1.64	1.65	-10.38	-10.60	-7.48	-5.83	24
UNII8	6745	159	-2.43	-3.38	0.13	-1.74	-2.37	0.97	-1.08	-1.71	1.63	-10.50	-10.12	-7.30	-5.67	24
	6905	191	-2.34	-3.60	0.09	-1.61	-2.91	0.79	-1.14	-2.28	1.33	-10.50	-10.12	-7.30	-5.96	24

Mode : EHT320(80LM) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	1.08	0.45	3.79	2.10	1.19	4.68	2.84	1.79	5.36	-10.07	-9.91	-6.98	-1.62	24
	6265	63	0.65	0.54	3.60	1.54	1.50	4.53	2.44	2.32	5.39	-10.07	-9.91	-6.98	-1.59	24
UNII6	6425	95	0.77	0.74	3.77	1.52	1.66	4.60	2.05	2.25	5.16	-10.38	-10.60	-7.48	-2.31	24
	6585	127	0.19	0.90	3.57	1.10	1.57	4.35	1.60	2.20	4.92	-10.38	-10.60	-7.48	-2.56	24
UNII8	6745	159	0.99	0.82	3.91	1.50	1.56	4.54	2.13	2.08	5.12	-10.50	-10.12	-7.30	-2.18	24
	6905	191	0.37	0.28	3.33	0.84	1.10	3.98	1.23	1.86	4.57	-10.50	-10.12	-7.30	-2.73	24

Mode : EHT320(80LM) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.33	5.29	8.32	5.58	5.41	8.51	5.80	5.67	8.75	-10.07	-9.91	-6.98	1.77	24
	6265	63	5.47	4.36	7.96	5.49	4.49	8.02	5.85	4.81	8.37	-10.07	-9.91	-6.98	1.39	24
UNII6	6425	95	5.91	4.24	8.17	5.79	4.34	8.14	5.88	4.51	8.26	-10.38	-10.60	-7.48	0.78	24
	6585	127	4.83	5.23	8.04	5.01	5.13	8.08	5.16	5.30	8.24	-10.38	-10.60	-7.48	0.76	24
UNII8	6745	159	5.37	4.93	8.17	5.26	4.75	8.02	5.46	4.77	8.14	-10.50	-10.12	-7.30	0.87	24
	6905	191	5.46	4.93	8.21	5.29	4.78	8.05	5.40	5.02	8.22	-10.50	-10.12	-7.30	0.93	24

Mode : EHT320(80LM) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	9.94	9.34	12.66	10.05	9.37	12.73	10.18	9.42	12.83	-10.07	-9.91	-6.98	5.85	24
	6265	63	10.45	9.68	13.10	10.40	9.69	13.07	10.56	9.94	13.27	-10.07	-9.91	-6.98	6.29	24
UNII6	6425	95	10.47	9.25	12.91	10.40	9.30	12.90	10.21	9.29	12.79	-10.38	-10.60	-7.48	5.44	24
	6585	127	9.78	10.63	13.24	9.85	10.53	13.22	9.90	10.50	13.22	-10.38	-10.60	-7.48	5.76	24
UNII8	6745	159	10.46	10.20	13.35	10.39	10.10	13.26	10.41	9.90	13.17	-10.50	-10.12	-7.30	6.05	24
	6905	191	10.85	10.18	13.54	10.75	10.12	13.46	10.63	10.08	13.37	-10.50	-10.12	-7.30	6.24	24

Mode : EHT320(80LM) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	12.00	11.56	14.80	-	-	-	12.18	11.62	14.92	-10.07	-9.91	-6.98	7.94	24
	6265	63	12.73	11.74	15.27	-	-	-	12.82	11.90	15.40	-10.07	-9.91	-6.98	8.42	24
UNII6	6425	95	12.79	11.19	15.07	-	-	-	12.59	11.18	14.95	-10.38	-10.60	-7.48	7.59	24
	6585	127	12.18	12.49	15.35	-	-	-	12.30	12.42	15.37	-10.38	-10.60	-7.48	7.89	24
UNII8	6745	159	12.57	11.78	15.20	-	-	-	12.54	11.60	15.11	-10.50	-10.12	-7.30	7.90	24
	6905	191	12.68	12.11	15.41	-	-	-	12.54	12.06	15.32	-10.50	-10.12	-7.30	8.12	24

Mode : EHT320(80LM) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.97	13.98	17.51	-	-	-	-10.07	-9.91	-6.98	10.53	24
	6265	63	-	-	-	15.82	14.92	18.40	-	-	-	-10.07	-9.91	-6.98	11.42	24
UNII6	6425	95	-	-	-	15.74	14.77	18.29	-	-	-	-10.38	-10.60	-7.48	10.81	24
	6585	127	-	-	-	15.20	15.46	18.34	-	-	-	-10.38	-10.60	-7.48	10.86	24
UNII8	6745	159	-	-	-	15.55	15.65	18.61	-	-	-	-10.50	-10.12	-7.30	11.31	24
	6905	191	-	-	-	15.46	14.96	18.23	-	-	-	-10.50	-10.12	-7.30	10.93	24

Mode : EHT320(80MH) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-0.15	-1.30	2.32	-0.76	-2.21	1.59	-1.57	-3.05	0.76	-10.07	-9.91	-6.98	-4.66	24
	6265	63	-0.84	-1.16	2.01	-1.73	-2.16	1.07	-2.27	-3.09	0.35	-10.07	-9.91	-6.98	-4.97	24
UNII6	6425	95	-1.12	-1.25	1.83	-1.88	-2.00	1.07	-2.67	-2.62	0.37	-10.38	-10.60	-7.48	-5.65	24
	6585	127	-1.05	-1.62	1.69	-1.87	-2.53	0.83	-2.50	-3.23	0.16	-10.38	-10.60	-7.48	-5.79	24
UNII8	6745	159	-1.08	-1.75	1.60	-1.82	-2.55	0.84	-2.39	-3.28	0.20	-10.50	-10.12	-7.30	-5.69	24
	6905	191	-1.08	-2.32	1.35	-2.06	-3.37	0.34	-3.11	-4.19	-0.61	-10.50	-10.12	-7.30	-5.95	24

Mode : EHT320(80MH) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	2.81	1.87	5.38	2.12	1.09	4.65	1.54	0.35	4.00	-10.07	-9.91	-6.98	-1.60	24
	6265	63	2.39	2.28	5.35	1.58	1.44	4.52	0.96	0.76	3.87	-10.07	-9.91	-6.98	-1.63	24
UNII6	6425	95	2.02	2.27	5.16	1.17	1.29	4.24	0.25	0.54	3.41	-10.38	-10.60	-7.48	-2.32	24
	6585	127	1.61	2.29	4.97	0.71	1.24	3.99	0.00	0.47	3.25	-10.38	-10.60	-7.48	-2.51	24
UNII8	6745	159	2.10	2.03	5.08	1.08	1.31	4.20	0.33	0.67	3.51	-10.50	-10.12	-7.30	-2.22	24
	6905	191	1.29	1.85	4.59	0.23	1.06	3.67	-0.82	0.47	2.88	-10.50	-10.12	-7.30	-2.71	24

Mode : EHT320(80MH) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.82	5.62	8.73	5.93	5.71	8.84	5.80	5.62	8.72	-10.07	-9.91	-6.98	1.86	24
	6265	63	5.84	4.80	8.36	5.65	4.81	8.26	5.55	4.64	8.12	-10.07	-9.91	-6.98	1.38	24
UNII6	6425	95	5.98	4.49	8.31	5.95	4.35	8.23	5.59	4.23	7.98	-10.38	-10.60	-7.48	0.83	24
	6585	127	5.27	5.21	8.25	5.27	4.93	8.11	5.13	4.75	7.95	-10.38	-10.60	-7.48	0.77	24
UNII8	6745	159	5.58	4.69	8.17	5.51	4.65	8.11	5.36	4.54	7.98	-10.50	-10.12	-7.30	0.87	24
	6905	191	5.46	4.98	8.24	5.36	4.95	8.17	5.01	4.79	7.91	-10.50	-10.12	-7.30	0.94	24

Mode : EHT320(80MH) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	10.16	9.42	12.82	10.15	9.47	12.84	10.37	9.64	13.03	-10.07	-9.91	-6.98	6.05	24
	6265	63	10.56	9.99	13.30	10.41	9.97	13.21	10.47	10.05	13.28	-10.07	-9.91	-6.98	6.32	24
UNII6	6425	95	10.22	9.22	12.76	10.21	9.16	12.73	10.11	9.28	12.73	-10.38	-10.60	-7.48	5.28	24
	6585	127	9.91	10.52	13.24	9.92	10.46	13.21	10.08	10.29	13.20	-10.38	-10.60	-7.48	5.76	24
UNII8	6745	159	10.41	9.82	13.14	10.37	9.82	13.11	10.44	9.88	13.18	-10.50	-10.12	-7.30	5.88	24
	6905	191	10.60	10.16	13.40	10.56	10.13	13.36	10.40	10.14	13.28	-10.50	-10.12	-7.30	6.10	24

Mode : EHT320(80MH) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	12.11	11.69	14.92	-	-	-	12.30	11.86	15.09	-10.07	-9.91	-6.98	8.11	24
	6265	63	12.77	12.03	15.42	-	-	-	12.70	12.08	15.41	-10.07	-9.91	-6.98	8.45	24
UNII6	6425	95	12.60	11.11	14.93	-	-	-	12.50	11.14	14.88	-10.38	-10.60	-7.48	7.45	24
	6585	127	12.32	12.48	15.41	-	-	-	12.39	12.25	15.33	-10.38	-10.60	-7.48	7.93	24
UNII8	6745	159	12.55	11.48	15.06	-	-	-	12.54	11.50	15.06	-10.50	-10.12	-7.30	7.76	24
	6905	191	12.45	12.17	15.32	-	-	-	12.31	12.11	15.22	-10.50	-10.12	-7.30	8.02	24

Mode : EHT320(80MH) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	15.06	14.20	17.66	-	-	-	-10.07	-9.91	-6.98	10.68	24
	6265	63	-	-	-	15.76	15.17	18.49	-	-	-	-10.07	-9.91	-6.98	11.51	24
UNII6	6425	95	-	-	-	15.57	14.74	18.19	-	-	-	-10.38	-10.60	-7.48	10.71	24
	6585	127	-	-	-	15.29	15.38	18.34	-	-	-	-10.38	-10.60	-7.48	10.87	24
UNII8	6745	159	-	-	-	15.53	15.44	18.49	-	-	-	-10.50	-10.12	-7.30	11.20	24
	6905	191	-	-	-	15.27	15.03	18.16	-	-	-	-10.50	-10.12	-7.30	10.86	24

Mode : EHT320(80HH) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-1.60	-3.20	0.68	-1.91	-3.65	0.32	-2.02	-3.82	0.18	-10.07	-9.91	-6.98	-6.29	24
	6265	63	-2.37	-3.15	0.27	-2.58	-3.25	0.11	-2.67	-3.68	-0.14	-10.07	-9.91	-6.98	-6.71	24
UNII6	6425	95	-2.68	-2.63	0.36	-2.85	-3.01	0.08	-2.97	-3.04	0.01	-10.38	-10.60	-7.48	-7.12	24
	6585	127	-2.52	-3.30	0.12	-2.89	-3.56	-0.20	-3.12	-4.03	-0.54	-10.38	-10.60	-7.48	-7.36	24
UNII8	6745	159	-2.49	-3.34	0.11	-2.92	-3.79	-0.33	-3.18	-4.13	-0.62	-10.50	-10.12	-7.30	-7.18	24
	6905	191	-3.17	-4.22	-0.65	-3.51	-4.55	-0.99	-4.10	-4.91	-1.47	-10.50	-10.12	-7.30	-7.95	24

Mode : EHT320(80HH) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	1.46	0.32	3.94	1.28	0.12	3.75	1.27	-0.08	3.66	-10.07	-9.91	-6.98	-3.04	24
	6265	63	0.87	0.65	3.77	0.64	0.48	3.57	0.36	0.17	3.28	-10.07	-9.91	-6.98	-3.21	24
UNII6	6425	95	0.16	0.43	3.31	-0.14	0.01	2.95	-0.38	-0.27	2.68	-10.38	-10.60	-7.48	-4.17	24
	6585	127	-0.11	0.43	3.18	-0.68	-0.01	2.68	-1.01	-0.36	2.34	-10.38	-10.60	-7.48	-4.30	24
UNII8	6745	159	0.22	0.53	3.39	-0.35	0.25	2.97	-0.84	0.08	2.66	-10.50	-10.12	-7.30	-3.91	24
	6905	191	-0.97	0.33	2.74	-1.36	0.26	2.53	-1.85	0.04	2.21	-10.50	-10.12	-7.30	-4.56	24

Mode : EHT320(80HH) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.83	5.81	8.83	5.84	5.84	8.85	5.97	5.99	8.99	-10.07	-9.91	-6.98	2.01	24
	6265	63	5.68	4.83	8.29	5.49	4.94	8.24	5.39	4.84	8.14	-10.07	-9.91	-6.98	1.31	24
UNII6	6425	95	5.73	4.30	8.09	5.86	4.20	8.12	5.78	4.14	8.05	-10.38	-10.60	-7.48	0.64	24
	6585	127	5.37	4.91	8.15	5.17	4.72	7.96	5.19	4.47	7.86	-10.38	-10.60	-7.48	0.68	24
UNII8	6745	159	5.58	4.68	8.16	5.38	4.49	7.97	5.22	4.49	7.88	-10.50	-10.12	-7.30	0.86	24
	6905	191	5.16	5.00	8.09	5.16	5.22	8.20	4.93	5.19	8.07	-10.50	-10.12	-7.30	0.91	24

Mode : EHT320(80HH) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	10.28	9.65	12.99	10.24	9.69	12.98	10.42	9.93	13.19	-10.07	-9.91	-6.98	6.21	24
	6265	63	10.50	10.10	13.32	10.44	10.19	13.33	10.25	10.18	13.23	-10.07	-9.91	-6.98	6.35	24
UNII6	6425	95	10.09	9.17	12.66	10.17	9.06	12.66	10.23	9.06	12.69	-10.38	-10.60	-7.48	5.21	24
	6585	127	10.10	10.25	13.19	9.99	10.18	13.10	10.02	9.98	13.01	-10.38	-10.60	-7.48	5.71	24
UNII8	6745	159	10.51	9.81	13.18	10.43	9.69	13.09	10.32	9.75	13.06	-10.50	-10.12	-7.30	5.89	24
	6905	191	10.48	10.24	13.37	10.50	10.38	13.45	10.36	10.43	13.40	-10.50	-10.12	-7.30	6.16	24

Mode : EHT320(80HH) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	12.23	11.88	15.06	-	-	-	12.32	12.03	15.19	-10.07	-9.91	-6.98	8.21	24
	6265	63	12.73	12.16	15.46	-	-	-	12.53	12.18	15.37	-10.07	-9.91	-6.98	8.48	24
UNII6	6425	95	12.45	11.00	14.79	-	-	-	12.56	10.93	14.83	-10.38	-10.60	-7.48	7.35	24
	6585	127	12.39	12.23	15.32	-	-	-	12.36	12.02	15.20	-10.38	-10.60	-7.48	7.84	24
UNII8	6745	159	12.59	11.43	15.06	-	-	-	12.45	11.37	14.95	-10.50	-10.12	-7.30	7.76	24
	6905	191	12.34	12.30	15.33	-	-	-	12.26	12.40	15.34	-10.50	-10.12	-7.30	8.04	24

Mode : EHT320(80HH) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	15.15	14.42	17.81	-	-	-	-10.07	-9.91	-6.98	10.83	24
	6265	63	-	-	-	15.66	15.29	18.49	-	-	-	-10.07	-9.91	-6.98	11.51	24
UNII6	6425	95	-	-	-	15.52	14.58	18.09	-	-	-	-10.38	-10.60	-7.48	10.61	24
	6585	127	-	-	-	15.31	15.09	18.21	-	-	-	-10.38	-10.60	-7.48	10.73	24
UNII8	6745	159	-	-	-	15.51	15.35	18.44	-	-	-	-10.50	-10.12	-7.30	11.14	24
	6905	191	-	-	-	15.15	15.19	18.18	-	-	-	-10.50	-10.12	-7.30	10.89	24

Mode : EHT320(160L) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	12.65	12.30	15.49	-	-	-	-10.07	-9.91	-6.98	8.51	24
	6265	63	-	-	-	13.72	12.61	16.21	-	-	-	-10.07	-9.91	-6.98	9.23	24
UNII6	6425	95	-	-	-	13.65	11.73	15.80	-	-	-	-10.38	-10.60	-7.48	8.32	24
	6585	127	-	-	-	13.22	13.28	16.26	-	-	-	-10.38	-10.60	-7.48	8.78	24
UNII8	6745	159	-	-	-	13.46	13.78	16.63	-	-	-	-10.50	-10.12	-7.30	9.33	24
	6905	191	-	-	-	13.46	12.77	16.14	-	-	-	-10.50	-10.12	-7.30	8.85	24

Mode : EHT320(160U) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	13.02	12.71	15.87	-	-	-	-10.07	-9.91	-6.98	8.90	24
	6265	63	-	-	-	13.69	12.99	16.37	-	-	-	-10.07	-9.91	-6.98	9.39	24
UNII6	6425	95	-	-	-	13.48	11.64	15.67	-	-	-	-10.38	-10.60	-7.48	8.19	24
	6585	127	-	-	-	13.30	13.02	16.17	-	-	-	-10.38	-10.60	-7.48	8.69	24
UNII8	6745	159	-	-	-	13.45	13.37	16.42	-	-	-	-10.50	-10.12	-7.30	9.12	24
	6905	191	-	-	-	13.22	12.79	16.02	-	-	-	-10.50	-10.12	-7.30	8.73	24

Mode : EHT320 4x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	12.90	12.55	15.74	-	-	-	-10.07	-9.91	-6.98	8.76	24
	6265	63	-	-	-	13.78	12.85	16.35	-	-	-	-10.07	-9.91	-6.98	9.37	24
UNII6	6425	95	-	-	-	13.61	11.79	15.81	-	-	-	-10.38	-10.60	-7.48	8.33	24
	6585	127	-	-	-	13.26	13.20	16.24	-	-	-	-10.38	-10.60	-7.48	8.77	24
UNII8	6745	159	-	-	-	13.51	13.62	16.58	-	-	-	-10.50	-10.12	-7.30	9.28	24
	6905	191	-	-	-	13.37	12.83	16.12	-	-	-	-10.50	-10.12	-7.30	8.83	24

Mode : EHT320 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	13.42	13.03	16.24	-	-	-	-10.07	-9.91	-6.98	9.26	24
	6265	63	-	-	-	14.27	13.36	16.85	-	-	-	-10.07	-9.91	-6.98	9.87	24
UNII6	6425	95	-	-	-	14.12	12.25	16.30	-	-	-	-10.38	-10.60	-7.48	8.82	24
	6585	127	-	-	-	13.81	13.64	16.74	-	-	-	-10.38	-10.60	-7.48	9.26	24
UNII8	6745	159	-	-	-	14.01	14.06	17.05	-	-	-	-10.50	-10.12	-7.30	9.75	24
	6905	191	-	-	-	13.93	13.28	16.63	-	-	-	-10.50	-10.12	-7.30	9.33	24

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	8.52	8.34	11.44	-	-	-	-10.07	-9.91	-6.98	4.46	24
	6175	45	-	-	-	10.22	9.24	12.77	-	-	-	-10.07	-9.91	-6.98	5.79	24
	6415	93	-	-	-	9.96	9.51	12.75	-	-	-	-10.07	-9.91	-6.98	5.77	24
UNII6	6435	97	-	-	-	9.83	8.72	12.32	-	-	-	-10.38	-10.60	-7.48	4.84	24
	6475	105	-	-	-	9.56	9.16	12.38	-	-	-	-10.38	-10.60	-7.48	4.90	24
	6515	113	-	-	-	9.96	9.32	12.66	-	-	-	-10.38	-10.60	-7.48	5.18	24
UNII7	6535	117	-	-	-	10.02	9.22	12.65	-	-	-	-10.38	-10.60	-7.48	5.17	24
	6695	149	-	-	-	9.90	9.64	12.78	-	-	-	-10.38	-10.60	-7.48	5.30	24
	6855	181	-	-	-	10.24	9.54	12.91	-	-	-	-10.38	-10.60	-7.48	5.43	24
UNII8	6875	185	-	-	-	9.89	9.53	12.72	-	-	-	-10.50	-10.12	-7.30	5.43	24
	6995	209	-	-	-	10.16	9.79	12.99	-	-	-	-10.50	-10.12	-7.30	5.69	24
	7115	233	-	-	-	6.54	6.32	9.44	-	-	-	-10.50	-10.12	-7.30	2.14	24

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	1.64	1.01	4.35	1.52	0.84	4.20	1.52	0.89	4.23	-10.07	-9.91	-6.98	-2.63	24
	6175	45	0.64	1.00	3.83	0.55	0.87	3.72	0.69	0.97	3.85	-10.07	-9.91	-6.98	-3.13	24
	6415	93	-0.47	1.08	3.39	-0.57	0.97	3.28	-0.43	1.08	3.40	-10.07	-9.91	-6.98	-3.58	24
UNII6	6435	97	-0.40	1.15	3.45	-0.49	1.03	3.35	-0.38	1.14	3.46	-10.38	-10.60	-7.48	-4.02	24
	6475	105	-0.44	1.17	3.45	-0.57	1.07	3.34	-0.45	1.23	3.48	-10.38	-10.60	-7.48	-4.00	24
	6515	113	-0.17	0.61	3.24	-0.14	0.48	3.20	-0.07	0.54	3.25	-10.38	-10.60	-7.48	-4.23	24
UNII7	6535	117	0.32	0.72	3.53	0.22	0.61	3.43	0.34	0.70	3.53	-10.38	-10.60	-7.48	-3.95	24
	6695	149	0.53	0.49	3.52	0.37	0.35	3.37	0.43	0.43	3.44	-10.38	-10.60	-7.48	-3.96	24
	6855	181	0.19	-0.53	2.86	0.07	-0.63	2.74	0.13	-0.52	2.83	-10.38	-10.60	-7.48	-4.62	24
UNII8	6875	185	0.08	-0.53	2.80	-0.03	-0.64	2.69	0.03	-0.49	2.78	-10.50	-10.12	-7.30	-4.50	24
	6995	209	-0.18	-0.50	2.67	-0.31	-0.58	2.57	-0.17	-0.39	2.73	-10.50	-10.12	-7.30	-4.56	24
	7115	233	1.67	0.03	3.94	1.55	-0.05	3.83	1.66	0.15	3.98	-10.50	-10.12	-7.30	-3.32	24

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	4.47	4.50	7.49	-	-	-	4.44	4.49	7.48	-10.07	-9.91	-6.98	0.51	24
	6175	45	5.43	5.34	8.40	-	-	-	5.45	5.33	8.40	-10.07	-9.91	-6.98	1.42	24
	6415	93	5.52	5.37	8.46	-	-	-	5.52	5.40	8.47	-10.07	-9.91	-6.98	1.49	24
UNII6	6435	97	5.79	4.35	8.14	-	-	-	5.80	4.35	8.14	-10.38	-10.60	-7.48	0.67	24
	6475	105	5.02	3.93	7.52	-	-	-	5.04	4.00	7.56	-10.38	-10.60	-7.48	0.08	24
	6515	113	4.74	4.45	7.61	-	-	-	4.70	4.38	7.55	-10.38	-10.60	-7.48	0.13	24
UNII7	6535	117	4.74	4.36	7.57	-	-	-	4.80	4.34	7.59	-10.38	-10.60	-7.48	0.11	24
	6695	149	5.09	5.05	8.08	-	-	-	5.04	4.98	8.02	-10.38	-10.60	-7.48	0.60	24
	6855	181	5.23	4.88	8.07	-	-	-	5.15	4.88	8.03	-10.38	-10.60	-7.48	0.59	24
UNII8	6875	185	5.03	4.89	7.97	-	-	-	4.98	4.93	7.96	-10.50	-10.12	-7.30	0.67	24
	6995	209	5.26	5.10	8.19	-	-	-	5.25	5.22	8.25	-10.50	-10.12	-7.30	0.95	24
	7115	233	5.01	4.60	7.82	-	-	-	5.03	4.68	7.87	-10.50	-10.12	-7.30	0.57	24

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	2.51	0.89	4.78	2.33	0.62	4.57	2.49	0.63	4.67	-10.07	-9.91	-6.98	-2.20	24
	6165	43	1.83	1.23	4.55	1.71	1.07	4.41	1.91	1.15	4.56	-10.07	-9.91	-6.98	-2.42	24
	6405	91	0.98	1.28	4.14	0.81	1.13	3.98	0.90	1.26	4.09	-10.07	-9.91	-6.98	-2.84	24
UNII6	6445	99	1.01	1.33	4.18	0.88	1.19	4.05	0.98	1.29	4.15	-10.38	-10.60	-7.48	-3.29	24
	6485	107	0.98	1.36	4.19	0.86	1.27	4.08	0.83	1.43	4.15	-10.38	-10.60	-7.48	-3.29	24
	6525	115	0.25	0.80	3.54	0.06	0.59	3.35	0.22	0.67	3.46	-10.38	-10.60	-7.48	-3.94	24
UNII7	6565	123	0.12	0.39	3.27	-0.03	0.26	3.13	0.01	0.39	3.21	-10.38	-10.60	-7.48	-4.21	24
	6685	147	0.71	0.85	3.79	0.49	0.68	3.59	0.47	0.74	3.62	-10.38	-10.60	-7.48	-3.69	24
	6845	179	0.68	-0.09	3.32	0.48	-0.27	3.13	0.43	-0.17	3.15	-10.38	-10.60	-7.48	-4.16	24
UNII8	6885	187	0.36	-0.19	3.10	0.18	-0.29	2.96	0.22	-0.08	3.08	-10.50	-10.12	-7.30	-4.19	24
	7005	211	0.14	-0.16	3.00	-0.01	-0.19	2.91	0.04	0.10	3.08	-10.50	-10.12	-7.30	-4.22	24
	7085	227	2.13	0.19	4.28	1.95	0.10	4.13	2.01	0.37	4.28	-10.50	-10.12	-7.30	-3.02	24

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	4.56	3.71	7.17	4.41	3.45	6.97	4.75	3.58	7.21	-10.07	-9.91	-6.98	0.23	24
	6165	43	5.32	5.34	8.34	5.26	5.20	8.24	5.39	5.35	8.38	-10.07	-9.91	-6.98	1.40	24
	6405	91	5.46	5.38	8.43	5.30	5.24	8.28	5.42	5.41	8.42	-10.07	-9.91	-6.98	1.45	24
UNII6	6445	99	5.79	4.48	8.19	5.67	4.34	8.06	5.77	4.41	8.15	-10.38	-10.60	-7.48	0.71	24
	6485	107	4.98	4.39	7.71	4.85	4.34	7.62	4.93	4.51	7.74	-10.38	-10.60	-7.48	0.26	24
	6525	115	4.74	4.52	7.64	4.58	4.33	7.47	4.81	4.36	7.60	-10.38	-10.60	-7.48	0.16	24
UNII7	6565	123	5.02	5.15	8.10	4.92	5.05	7.99	5.00	5.17	8.09	-10.38	-10.60	-7.48	0.62	24
	6685	147	5.21	5.11	8.17	5.05	4.97	8.02	5.09	5.00	8.06	-10.38	-10.60	-7.48	0.69	24
	6845	179	5.29	5.00	8.16	5.10	4.87	8.00	5.16	4.92	8.05	-10.38	-10.60	-7.48	0.68	24
UNII8	6885	187	5.17	4.89	8.04	4.99	4.83	7.92	5.11	5.00	8.07	-10.50	-10.12	-7.30	0.77	24
	7005	211	5.21	5.05	8.14	5.09	5.02	8.07	5.23	5.24	8.24	-10.50	-10.12	-7.30	0.95	24
	7085	227	4.95	4.95	7.96	4.81	4.91	7.87	4.92	5.06	8.00	-10.50	-10.12	-7.30	0.70	24

Mode : EHT80 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	2.32	0.67	4.58	2.23	0.35	4.40	2.24	0.41	4.43	-10.07	-9.91	-6.98	-2.39	24
	6145	39	1.89	0.71	4.35	1.79	0.60	4.25	2.09	0.68	4.45	-10.07	-9.91	-6.98	-2.53	24
	6385	87	0.86	1.03	3.96	0.79	1.01	3.92	0.73	1.16	3.96	-10.07	-9.91	-6.98	-3.02	24
UNII6	6465	103	0.81	1.14	3.99	0.71	1.04	3.89	0.53	1.17	3.87	-10.38	-10.60	-7.48	-3.49	24
	6545	119	0.37	0.86	3.63	0.28	0.68	3.49	0.25	0.68	3.48	-10.38	-10.60	-7.48	-3.85	24
UNII7	6625	135	0.18	0.44	3.32	0.02	0.28	3.16	0.10	0.10	3.11	-10.38	-10.60	-7.48	-4.16	24
	6705	151	0.57	0.51	3.55	0.25	0.33	3.30	0.25	0.24	3.25	-10.38	-10.60	-7.48	-3.93	24
	6785	167	0.35	-0.28	3.06	0.08	-0.38	2.87	0.11	-0.13	3.00	-10.38	-10.60	-7.48	-4.42	24
UNII8	6865	183	0.49	-0.39	3.08	0.19	-0.53	2.85	0.02	-0.30	2.88	-10.50	-10.12	-7.30	-4.22	24
	6945	199	0.70	-0.08	3.34	0.39	-0.15	3.14	0.16	0.03	3.11	-10.50	-10.12	-7.30	-3.96	24
	7025	215	1.00	-0.54	3.31	0.83	-0.36	3.29	0.56	-0.09	3.25	-10.50	-10.12	-7.30	-3.99	24

Mode : EHT80 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	4.62	3.54	7.12	4.73	3.43	7.14	4.81	3.56	7.24	-10.07	-9.91	-6.98	0.26	24
	6145	39	5.25	5.14	8.21	5.25	5.17	8.22	5.41	5.31	8.37	-10.07	-9.91	-6.98	1.39	24
	6385	87	5.64	5.44	8.55	5.59	5.46	8.54	5.45	5.53	8.50	-10.07	-9.91	-6.98	1.57	24
UNII6	6465	103	5.11	3.93	7.57	5.09	3.85	7.52	5.00	3.99	7.54	-10.38	-10.60	-7.48	0.09	24
	6545	119	4.80	4.37	7.60	4.83	4.30	7.58	4.86	4.23	7.57	-10.38	-10.60	-7.48	0.12	24
UNII7	6625	135	5.07	5.08	8.09	5.04	4.98	8.02	5.15	4.79	7.98	-10.38	-10.60	-7.48	0.61	24
	6705	151	5.27	5.24	8.27	5.09	5.11	8.11	5.16	4.88	8.03	-10.38	-10.60	-7.48	0.79	24
	6785	167	5.45	4.14	7.86	5.35	4.10	7.78	5.48	4.21	7.90	-10.38	-10.60	-7.48	0.42	24
UNII8	6865	183	5.20	4.94	8.08	5.07	4.87	7.98	5.00	4.95	7.99	-10.50	-10.12	-7.30	0.78	24
	6945	199	5.53	4.97	8.27	5.40	4.95	8.19	5.30	5.04	8.18	-10.50	-10.12	-7.30	0.97	24
	7025	215	5.16	4.52	7.86	5.13	4.74	7.95	4.99	4.72	7.87	-10.50	-10.12	-7.30	0.65	24

Mode : EHT80 MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	12.21	11.02	14.66	12.18	11.03	14.66	12.16	11.02	14.64	-10.07	-9.91	-6.98	7.68	24
	6145	39	12.30	11.74	15.04	12.29	11.71	15.02	12.23	11.68	14.97	-10.07	-9.91	-6.98	8.06	24
	6385	87	12.28	12.27	15.29	12.29	12.22	15.27	12.33	12.25	15.30	-10.07	-9.91	-6.98	8.32	24
UNII6	6465	103	12.38	11.53	14.98	12.36	11.55	14.98	12.38	11.48	14.97	-10.38	-10.60	-7.48	7.51	24
	6545	119	12.14	11.59	14.89	12.11	11.63	14.89	12.09	11.63	14.88	-10.38	-10.60	-7.48	7.41	24
UNII7	6625	135	12.28	12.32	15.31	12.25	12.35	15.31	12.21	12.41	15.32	-10.38	-10.60	-7.48	7.84	24
	6705	151	12.43	12.38	15.41	12.44	12.39	15.43	12.43	12.47	15.46	-10.38	-10.60	-7.48	7.98	24
	6785	167	12.59	11.26	14.99	12.57	11.26	14.97	12.53	11.24	14.94	-10.38	-10.60	-7.48	7.51	24
UNII8	6865	183	12.30	12.07	15.19	12.31	12.07	15.20	12.32	12.06	15.20	-10.50	-10.12	-7.30	7.91	24
	6945	199	12.64	12.06	15.37	12.64	12.04	15.36	12.68	12.04	15.38	-10.50	-10.12	-7.30	8.09	24
	7025	215	12.30	11.53	14.94	12.28	11.52	14.93	12.33	11.51	14.95	-10.50	-10.12	-7.30	7.65	24

Mode: EHT160(80L) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	2.03	0.99	4.55	2.40	1.06	4.79	2.59	1.27	4.99	-10.07	-9.91	-6.98	-1.99	24
	6185	47	1.65	1.08	4.38	1.85	1.33	4.61	2.14	1.39	4.79	-10.07	-9.91	-6.98	-2.19	24
	6345	79	1.45	1.15	4.32	1.53	1.44	4.50	1.71	1.54	4.64	-10.07	-9.91	-6.98	-2.34	24
UNII6	6505	111	0.68	0.71	3.70	0.83	0.82	3.83	0.69	0.91	3.81	-10.38	-10.60	-7.48	-3.64	24
UNII7	6665	143	0.51	0.24	3.39	0.64	0.42	3.54	0.67	0.30	3.50	-10.38	-10.60	-7.48	-3.94	24
UNII8	6825	175	0.63	-0.34	3.18	0.63	-0.13	3.28	0.57	0.21	3.40	-10.50	-10.12	-7.30	-3.89	24
	6985	207	0.51	-0.82	2.90	0.50	-0.60	3.00	0.22	-0.34	2.96	-10.50	-10.12	-7.30	-4.30	24

Mode : EHT160(80L) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.08	2.11	5.63	3.45	2.24	5.90	3.59	2.46	6.07	-10.07	-9.91	-6.98	-0.91	24
	6185	47	5.33	5.06	8.21	5.42	5.25	8.35	5.60	5.35	8.49	-10.07	-9.91	-6.98	1.51	24
	6345	79	5.27	5.15	8.22	5.18	5.21	8.20	5.26	5.27	8.28	-10.07	-9.91	-6.98	1.30	24
UNII6	6505	111	4.85	4.30	7.59	4.89	4.32	7.62	4.77	4.41	7.61	-10.38	-10.60	-7.48	0.15	24
UNII7	6665	143	5.03	4.17	7.63	5.13	4.15	7.68	5.23	3.99	7.67	-10.38	-10.60	-7.48	0.20	24
UNII8	6825	175	5.36	4.88	8.14	5.32	4.93	8.14	5.42	4.98	8.22	-10.50	-10.12	-7.30	0.92	24
	6985	207	5.30	5.04	8.18	5.26	5.08	8.18	5.17	5.14	8.16	-10.50	-10.12	-7.30	0.89	24

Mode : EHT160(80L) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	12.31	11.05	14.73	12.22	11.02	14.67	12.13	10.93	14.58	-10.07	-9.91	-6.98	7.75	24
	6185	47	12.39	11.83	15.13	12.36	11.79	15.09	12.27	11.70	15.00	-10.07	-9.91	-6.98	8.15	24
	6345	79	12.43	12.45	15.45	12.46	12.45	15.46	12.43	12.42	15.44	-10.07	-9.91	-6.98	8.48	24
UNII6	6505	111	12.12	11.64	14.90	12.12	11.63	14.89	12.13	11.60	14.88	-10.38	-10.60	-7.48	7.42	24
UNII7	6665	143	12.35	11.34	14.88	12.33	11.32	14.87	12.28	11.38	14.86	-10.38	-10.60	-7.48	7.41	24
UNII8	6825	175	12.63	12.12	15.40	12.63	12.14	15.40	12.59	12.09	15.36	-10.50	-10.12	-7.30	8.11	24
	6985	207	12.38	12.33	15.37	12.37	12.33	15.36	12.40	12.31	15.36	-10.50	-10.12	-7.30	8.07	24

Mode : EHT160(80U) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	2.44	1.38	4.95	2.56	1.28	4.98	2.43	0.98	4.77	-10.07	-9.91	-6.98	-2.00	24
	6185	47	2.04	1.57	4.82	2.05	1.61	4.85	2.07	1.39	4.75	-10.07	-9.91	-6.98	-2.13	24
	6345	79	1.74	1.64	4.70	1.75	1.78	4.78	1.38	1.50	4.45	-10.07	-9.91	-6.98	-2.20	24
UNII6	6505	111	0.55	0.97	3.78	0.55	0.87	3.72	0.25	0.59	3.43	-10.38	-10.60	-7.48	-3.70	24
UNII7	6665	143	0.57	0.44	3.52	0.32	0.37	3.36	-0.07	-0.04	2.95	-10.38	-10.60	-7.48	-3.96	24
UNII8	6825	175	0.59	0.25	3.43	0.30	0.15	3.24	-0.20	0.06	2.94	-10.50	-10.12	-7.30	-3.87	24
	6985	207	0.29	0.01	3.16	0.18	0.25	3.22	-0.36	0.23	2.95	-10.50	-10.12	-7.30	-4.07	24

Mode : EHT160(80U) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	3.67	2.58	6.17	3.77	2.51	6.19	3.69	2.19	6.01	-10.07	-9.91	-6.98	-0.79	24
	6185	47	5.58	5.49	8.54	5.50	5.50	8.51	5.66	5.69	8.69	-10.07	-9.91	-6.98	1.71	24
	6345	79	5.28	5.37	8.33	5.23	5.47	8.36	5.06	5.43	8.26	-10.07	-9.91	-6.98	1.39	24
UNII6	6505	111	4.82	4.49	7.67	4.88	4.36	7.64	4.88	4.32	7.62	-10.38	-10.60	-7.48	0.19	24
UNII7	6665	143	5.29	4.07	7.73	5.12	3.96	7.59	5.15	3.73	7.51	-10.38	-10.60	-7.48	0.25	24
UNII8	6825	175	5.50	5.06	8.30	5.38	4.98	8.19	5.27	5.02	8.16	-10.50	-10.12	-7.30	1.00	24
	6985	207	5.30	5.46	8.39	5.26	5.61	8.45	5.09	5.62	8.38	-10.50	-10.12	-7.30	1.15	24

Mode : EHT160(80U) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	12.66	11.42	15.10	12.59	11.41	15.05	12.53	11.36	15.00	-10.07	-9.91	-6.98	8.12	24
	6185	47	12.48	12.12	15.31	12.48	12.10	15.30	12.40	12.02	15.23	-10.07	-9.91	-6.98	8.33	24
	6345	79	12.36	12.71	15.55	12.36	12.68	15.54	12.42	12.67	15.56	-10.07	-9.91	-6.98	8.58	24
UNII6	6505	111	12.16	11.69	14.94	12.14	11.72	14.95	12.10	11.69	14.91	-10.38	-10.60	-7.48	7.47	24
UNII7	6665	143	12.34	11.13	14.79	12.37	11.11	14.80	12.34	11.20	14.82	-10.38	-10.60	-7.48	7.34	24
UNII8	6825	175	12.64	12.12	15.40	12.64	12.16	15.42	12.66	12.15	15.42	-10.50	-10.12	-7.30	8.12	24
	6985	207	12.33	12.77	15.57	12.33	12.73	15.55	12.36	12.69	15.54	-10.50	-10.12	-7.30	8.27	24

Mode : EHT160 MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	15.30	14.51	17.94	15.21	14.47	17.87	15.12	14.42	17.79	-10.07	-9.91	-6.98	10.96	24
	6185	47	15.29	14.67	18.00	15.23	14.62	17.95	15.22	14.56	17.91	-10.07	-9.91	-6.98	11.03	24
	6345	79	15.31	14.98	18.16	15.34	14.96	18.16	15.39	14.92	18.17	-10.07	-9.91	-6.98	11.19	24
UNII6	6505	111	15.04	15.14	18.10	15.06	15.13	18.11	15.04	15.20	18.13	-10.38	-10.60	-7.48	10.65	24
UNII7	6665	143	15.29	14.59	17.96	15.25	14.66	17.98	15.26	14.75	18.02	-10.38	-10.60	-7.48	10.55	24
UNII8	6825	175	15.51	15.04	18.29	15.50	15.04	18.29	15.53	15.04	18.30	-10.50	-10.12	-7.30	11.00	24
	6985	207	15.33	15.62	18.49	15.39	15.62	18.52	15.41	15.52	18.48	-10.50	-10.12	-7.30	11.22	24

Mode : EHT160 MRU 996T+484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	15.21	14.50	17.88	15.20	14.42	17.84	15.11	14.37	17.76	-10.07	-9.91	-6.98	10.90	24
	6185	47	15.25	14.60	17.94	15.23	14.56	17.92	15.23	14.56	17.91	-10.07	-9.91	-6.98	10.96	24
	6345	79	15.32	14.95	18.15	15.36	14.90	18.15	15.38	14.89	18.15	-10.07	-9.91	-6.98	11.17	24
UNII6	6505	111	15.04	15.07	18.06	15.05	15.19	18.13	15.04	15.20	18.13	-10.38	-10.60	-7.48	10.65	24
UNII7	6665	143	15.32	14.67	18.02	15.25	14.67	17.98	15.30	14.73	18.03	-10.38	-10.60	-7.48	10.55	24
UNII8	6825	175	15.50	15.06	18.30	15.50	15.05	18.29	15.50	15.05	18.29	-10.50	-10.12	-7.30	11.00	24
	6985	207	15.33	15.60	18.48	15.34	15.58	18.47	15.34	15.51	18.44	-10.50	-10.12	-7.30	11.18	24

Mode : EHT320(80LL) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.27	-0.08	3.11	0.56	0.04	3.32	0.92	0.41	3.68	-10.07	-9.91	-6.98	-3.29	24
	6265	63	-0.16	-0.02	2.92	0.03	0.20	3.13	0.50	0.47	3.50	-10.07	-9.91	-6.98	-3.48	24
UNII6	6425	95	0.29	0.18	3.24	0.33	0.30	3.32	0.65	0.70	3.69	-10.38	-10.60	-7.48	-3.79	24
	6585	127	-0.05	-0.12	2.92	0.11	-0.04	3.04	0.14	0.26	3.21	-10.38	-10.60	-7.48	-4.27	24
UNII8	6745	159	0.39	-0.26	3.09	0.51	0.03	3.29	0.79	0.04	3.44	-10.50	-10.12	-7.30	-3.86	24
	6905	191	0.04	-1.07	2.53	0.07	-0.91	2.62	0.23	-0.49	2.89	-10.50	-10.12	-7.30	-4.40	24

Mode : EHT320(80LL) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.04	5.23	8.15	5.38	5.24	8.32	5.53	5.51	8.53	-10.07	-9.91	-6.98	1.55	24
	6265	63	5.49	4.20	7.90	5.61	4.36	8.04	5.82	4.53	8.23	-10.07	-9.91	-6.98	1.25	24
UNII6	6425	95	5.97	4.31	8.23	5.84	4.35	8.17	5.95	4.48	8.29	-10.38	-10.60	-7.48	0.81	24
	6585	127	5.21	5.31	8.27	5.23	5.30	8.27	5.13	5.42	8.29	-10.38	-10.60	-7.48	0.81	24
UNII8	6745	159	5.37	5.31	8.35	5.47	5.32	8.41	5.58	5.19	8.40	-10.50	-10.12	-7.30	1.11	24
	6905	191	5.52	5.07	8.31	5.48	5.16	8.33	5.62	5.24	8.44	-10.50	-10.12	-7.30	1.14	24

Mode : EHT320(80LL) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.81	11.43	14.64	11.74	11.43	14.60	11.68	11.38	14.54	-10.07	-9.91	-6.98	7.66	24
	6265	63	12.70	11.65	15.22	12.69	11.64	15.21	12.64	11.61	15.17	-10.07	-9.91	-6.98	8.24	24
UNII6	6425	95	12.77	11.10	15.03	12.81	11.10	15.05	12.78	11.09	15.03	-10.38	-10.60	-7.48	7.57	24
	6585	127	12.27	12.69	15.49	12.28	12.73	15.52	12.30	12.69	15.51	-10.38	-10.60	-7.48	8.04	24
UNII8	6745	159	12.53	11.96	15.27	12.52	11.97	15.27	12.49	12.05	15.29	-10.50	-10.12	-7.30	7.99	24
	6905	191	12.62	12.22	15.44	12.62	12.24	15.45	12.59	12.23	15.42	-10.50	-10.12	-7.30	8.15	24

Mode : EHT320(80LM) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	1.21	0.61	3.93	1.87	1.18	4.55	2.87	1.90	5.42	-10.07	-9.91	-6.98	-1.56	24
	6265	63	0.73	0.68	3.72	1.35	1.32	4.34	2.39	2.31	5.36	-10.07	-9.91	-6.98	-1.62	24
UNII6	6425	95	0.86	0.91	3.90	1.38	1.59	4.49	2.09	2.37	5.24	-10.38	-10.60	-7.48	-2.24	24
	6585	127	0.20	0.57	3.40	0.91	0.92	3.92	1.59	1.65	4.63	-10.38	-10.60	-7.48	-2.85	24
UNII8	6745	159	0.99	0.22	3.63	1.37	0.76	4.09	2.07	1.37	4.74	-10.50	-10.12	-7.30	-2.56	24
	6905	191	0.46	-0.28	3.12	0.78	0.23	3.53	1.31	1.17	4.25	-10.50	-10.12	-7.30	-3.05	24

Mode : EHT320(80LM) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.48	5.45	8.48	5.84	5.63	8.74	5.94	5.67	8.82	-10.07	-9.91	-6.98	1.84	24
	6265	63	5.67	4.42	8.10	5.80	4.62	8.26	5.93	4.81	8.42	-10.07	-9.91	-6.98	1.44	24
UNII6	6425	95	5.87	4.38	8.20	5.97	4.69	8.39	5.82	4.64	8.28	-10.38	-10.60	-7.48	0.91	24
	6585	127	5.03	5.20	8.13	5.29	5.30	8.30	5.32	5.24	8.29	-10.38	-10.60	-7.48	0.82	24
UNII8	6745	159	5.53	5.06	8.31	5.57	5.12	8.37	5.59	4.88	8.26	-10.50	-10.12	-7.30	1.07	24
	6905	191	5.57	5.06	8.33	5.61	5.12	8.38	5.52	5.14	8.35	-10.50	-10.12	-7.30	1.08	24

Mode : EHT320(80LM) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	12.17	11.59	14.90	12.13	11.61	14.89	12.07	11.59	14.85	-10.07	-9.91	-6.98	7.92	24
	6265	63	12.79	11.83	15.35	12.80	11.82	15.35	12.75	11.79	15.30	-10.07	-9.91	-6.98	8.37	24
UNII6	6425	95	12.66	11.23	15.02	12.66	11.21	15.01	12.73	11.20	15.04	-10.38	-10.60	-7.48	7.56	24
	6585	127	12.29	12.49	15.40	12.27	12.51	15.40	12.25	12.52	15.40	-10.38	-10.60	-7.48	7.93	24
UNII8	6745	159	12.52	11.66	15.12	12.56	11.69	15.16	12.55	11.77	15.18	-10.50	-10.12	-7.30	7.89	24
	6905	191	12.58	12.12	15.37	12.60	12.14	15.38	12.63	12.14	15.40	-10.50	-10.12	-7.30	8.11	24

Mode : EHT320(80MH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	2.90	1.89	5.43	2.35	1.38	4.90	1.73	0.48	4.16	-10.07	-9.91	-6.98	-1.55	24
	6265	63	2.43	2.30	5.37	1.78	1.67	4.74	1.01	1.13	4.08	-10.07	-9.91	-6.98	-1.61	24
UNII6	6425	95	1.98	2.34	5.18	1.40	1.62	4.52	0.34	0.75	3.56	-10.38	-10.60	-7.48	-2.30	24
	6585	127	1.55	1.60	4.59	0.91	0.94	3.94	0.03	-0.11	2.97	-10.38	-10.60	-7.48	-2.89	24
UNII8	6745	159	2.02	1.32	4.69	1.28	0.73	4.02	0.37	-0.01	3.19	-10.50	-10.12	-7.30	-2.60	24
	6905	191	1.20	1.18	4.20	0.44	0.61	3.54	-0.72	-0.18	2.57	-10.50	-10.12	-7.30	-3.10	24

Mode : EHT320(80MH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.89	5.70	8.81	5.72	5.57	8.66	5.88	5.72	8.81	-10.07	-9.91	-6.98	1.83	24
	6265	63	5.90	4.89	8.43	5.57	4.72	8.17	5.66	4.79	8.25	-10.07	-9.91	-6.98	1.45	24
UNII6	6425	95	5.98	4.57	8.34	5.79	4.32	8.12	5.66	4.40	8.09	-10.38	-10.60	-7.48	0.86	24
	6585	127	5.31	5.27	8.30	5.16	5.03	8.11	5.28	4.87	8.09	-10.38	-10.60	-7.48	0.82	24
UNII8	6745	159	5.62	4.82	8.25	5.37	4.59	8.01	5.49	4.66	8.10	-10.50	-10.12	-7.30	0.95	24
	6905	191	5.53	5.11	8.33	5.23	4.93	8.09	5.09	4.95	8.03	-10.50	-10.12	-7.30	1.04	24

Mode : EHT320(80MH) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	12.22	11.75	15.00	12.21	11.73	14.99	12.16	11.71	14.95	-10.07	-9.91	-6.98	8.03	24
	6265	63	12.70	12.04	15.39	12.75	12.04	15.42	12.73	12.00	15.39	-10.07	-9.91	-6.98	8.44	24
UNII6	6425	95	12.53	11.09	14.88	12.54	11.13	14.90	12.56	11.10	14.90	-10.38	-10.60	-7.48	7.42	24
	6585	127	12.36	12.30	15.34	12.35	12.33	15.35	12.32	12.39	15.36	-10.38	-10.60	-7.48	7.88	24
UNII8	6745	159	12.52	11.44	15.02	12.53	11.46	15.04	12.51	11.47	15.03	-10.50	-10.12	-7.30	7.74	24
	6905	191	12.38	12.09	15.25	12.41	12.09	15.26	12.44	12.11	15.29	-10.50	-10.12	-7.30	7.99	24

Mode : EHT320(80HH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	1.60	0.30	4.01	1.38	0.38	3.92	1.42	0.11	3.82	-10.07	-9.91	-6.98	-2.97	24
	6265	63	0.92	0.80	3.87	0.78	0.69	3.75	0.41	0.35	3.39	-10.07	-9.91	-6.98	-3.10	24
UNII6	6425	95	0.05	0.51	3.29	-0.03	0.20	3.09	-0.29	-0.16	2.78	-10.38	-10.60	-7.48	-4.19	24
	6585	127	-0.16	-0.29	2.78	-0.59	-0.55	2.44	-0.95	-1.03	2.02	-10.38	-10.60	-7.48	-4.70	24
UNII8	6745	159	0.17	-0.19	3.01	-0.24	-0.45	2.67	-0.77	-0.64	2.31	-10.50	-10.12	-7.30	-4.29	24
	6905	191	-0.97	-0.26	2.41	-1.22	-0.31	2.27	-1.78	-0.60	1.86	-10.50	-10.12	-7.30	-4.88	24

Mode : EHT320(80HH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.92	5.78	8.86	5.82	5.79	8.81	5.98	5.98	8.99	-10.07	-9.91	-6.98	2.01	24
	6265	63	5.77	4.95	8.39	5.69	4.97	8.36	5.53	4.99	8.28	-10.07	-9.91	-6.98	1.41	24
UNII6	6425	95	5.85	4.48	8.23	5.88	4.34	8.19	5.93	4.33	8.21	-10.38	-10.60	-7.48	0.75	24
	6585	127	5.43	5.00	8.23	5.25	4.85	8.07	5.27	4.59	7.96	-10.38	-10.60	-7.48	0.75	24
UNII8	6745	159	5.67	4.77	8.25	5.47	4.58	8.06	5.38	4.63	8.03	-10.50	-10.12	-7.30	0.95	24
	6905	191	5.27	5.14	8.21	5.20	5.22	8.22	5.09	5.32	8.22	-10.50	-10.12	-7.30	0.93	24

Mode : EHT320(80HH) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	12.30	11.99	15.16	12.31	11.98	15.16	12.26	11.90	15.09	-10.07	-9.91	-6.98	8.18	24
	6265	63	12.60	12.18	15.40	12.62	12.15	15.40	12.65	12.16	15.42	-10.07	-9.91	-6.98	8.44	24
UNII6	6425	95	12.53	10.92	14.81	12.49	10.95	14.80	12.47	10.95	14.78	-10.38	-10.60	-7.48	7.33	24
	6585	127	12.36	12.04	15.22	12.36	12.07	15.23	12.36	12.14	15.26	-10.38	-10.60	-7.48	7.79	24
UNII8	6745	159	12.50	11.39	14.99	12.53	11.40	15.01	12.55	11.39	15.02	-10.50	-10.12	-7.30	7.72	24
	6905	191	12.24	12.26	15.26	12.23	12.21	15.23	12.25	12.26	15.26	-10.50	-10.12	-7.30	7.97	24

Mode : EHT320(160L) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.86	13.88	17.41	14.77	13.83	17.33	14.69	13.74	17.25	-10.07	-9.91	-6.98	10.43	24
	6265	63	15.78	14.82	18.33	15.72	14.77	18.28	15.72	14.68	18.24	-10.07	-9.91	-6.98	11.35	24
UNII6	6425	95	15.69	14.70	18.23	15.70	14.68	18.23	15.78	14.65	18.26	-10.38	-10.60	-7.48	10.78	24
	6585	127	15.18	15.47	18.34	15.20	15.46	18.34	15.18	15.52	18.37	-10.38	-10.60	-7.48	10.89	24
UNII8	6745	159	15.49	15.67	18.59	15.50	15.72	18.62	15.51	15.83	18.68	-10.50	-10.12	-7.30	11.39	24
	6905	191	15.46	14.97	18.23	15.46	14.96	18.23	15.51	15.02	18.28	-10.50	-10.12	-7.30	10.99	24

Mode : EHT320(160U) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	15.10	14.31	17.74	15.04	14.22	17.66	15.05	14.18	17.65	-10.07	-9.91	-6.98	10.76	24
	6265	63	15.63	15.18	18.42	15.67	15.15	18.42	15.72	15.15	18.45	-10.07	-9.91	-6.98	11.47	24
UNII6	6425	95	15.44	14.60	18.05	15.49	14.58	18.07	15.50	14.66	18.11	-10.38	-10.60	-7.48	10.63	24
	6585	127	15.27	15.10	18.19	15.25	15.18	18.22	15.28	15.26	18.28	-10.38	-10.60	-7.48	10.80	24
UNII8	6745	159	15.46	15.34	18.41	15.46	15.33	18.40	15.50	15.40	18.46	-10.50	-10.12	-7.30	11.16	24
	6905	191	15.12	15.06	18.10	15.15	15.05	18.11	15.20	14.94	18.09	-10.50	-10.12	-7.30	10.82	24

Mode : EHT320 3x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.00	13.75	16.89	13.93	13.70	16.83	13.88	13.57	16.74	-10.07	-9.91	-6.98	9.91	24
	6265	63	14.83	13.95	17.42	14.84	13.90	17.41	14.85	13.78	17.36	-10.07	-9.91	-6.98	10.44	24
UNII6	6425	95	14.54	13.56	17.09	14.63	13.52	17.12	14.65	13.58	17.16	-10.38	-10.60	-7.48	9.68	24
	6585	127	14.29	14.40	17.36	14.36	14.46	17.42	14.29	14.55	17.43	-10.38	-10.60	-7.48	9.96	24
UNII8	6745	159	14.48	14.71	17.61	14.53	14.83	17.70	14.53	14.92	17.74	-10.50	-10.12	-7.30	10.44	24
	6905	191	14.33	14.11	17.23	14.38	14.16	17.28	14.45	14.07	17.28	-10.50	-10.12	-7.30	9.98	24

Mode : EHT320 2x996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.11	13.82	16.98	13.97	13.73	16.86	14.15	13.88	17.03	-10.07	-9.91	-6.98	10.05	24
	6265	63	14.96	14.00	17.52	14.98	13.91	17.48	14.96	14.08	17.55	-10.07	-9.91	-6.98	10.58	24
UNII6	6425	95	14.80	13.77	17.33	14.86	13.74	17.35	14.75	13.77	17.30	-10.38	-10.60	-7.48	9.87	24
	6585	127	14.48	14.70	17.60	14.48	14.78	17.64	14.54	14.64	17.60	-10.38	-10.60	-7.48	10.16	24
UNII8	6745	159	14.74	14.89	17.83	14.67	14.98	17.84	14.68	14.80	17.76	-10.50	-10.12	-7.30	10.54	24
	6905	191	14.60	14.20	17.41	14.66	14.24	17.47	14.53	14.24	17.40	-10.50	-10.12	-7.30	10.17	24

Mode : EHT320 3x996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.32	13.93	17.14	14.22	13.85	17.05	13.92	13.90	16.92	-10.07	-9.91	-6.98	10.16	24
	6265	63	14.82	14.12	17.50	14.96	14.10	17.56	14.88	14.08	17.51	-10.07	-9.91	-6.98	10.58	24
UNII6	6425	95	14.82	13.57	17.25	14.69	13.70	17.23	14.83	13.68	17.30	-10.38	-10.60	-7.48	9.82	24
	6585	127	14.50	14.73	17.63	14.52	14.69	17.62	14.58	14.66	17.63	-10.38	-10.60	-7.48	10.15	24
UNII8	6745	159	14.69	14.78	17.75	14.63	14.80	17.72	14.82	14.83	17.83	-10.50	-10.12	-7.30	10.54	24
	6905	191	14.45	14.37	17.42	14.47	14.39	17.44	14.61	14.32	17.48	-10.50	-10.12	-7.30	10.18	24

10.3.2 E.I.R.P Output Power(Standard client)

Standard client Limit : 30 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.3.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	2.01	0.64	4.39	1.64	0.24	4.00	1.96	0.51	4.30	-10.07	-9.91	-6.98	-2.59	30
	6175	45	13.51	13.23	16.38	13.20	12.85	16.04	13.58	13.21	16.41	-10.07	-9.91	-6.98	9.43	30
	6415	93	13.56	13.54	16.56	13.23	13.17	16.21	13.62	13.51	16.58	-10.07	-9.91	-6.98	9.60	30
UNII7	6535	117	13.26	13.43	16.36	12.96	13.07	16.02	13.35	13.38	16.38	-10.38	-10.60	-7.48	8.90	30
	6695	149	13.70	13.36	16.55	13.28	12.99	16.15	13.57	13.27	16.43	-10.38	-10.60	-7.48	9.07	30
	6855	181	13.69	12.93	16.34	13.28	12.57	15.95	13.56	12.94	16.27	-10.38	-10.60	-7.48	8.86	30

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	6.14	6.17	9.17	5.97	5.98	8.99	6.11	6.12	9.13	-10.07	-9.91	-6.98	2.19	30
	6175	45	13.52	13.18	16.36	13.36	12.98	16.18	13.56	13.19	16.39	-10.07	-9.91	-6.98	9.41	30
	6415	93	13.56	13.55	16.57	13.38	13.30	16.35	13.62	13.46	16.55	-10.07	-9.91	-6.98	9.59	30
UNII7	6535	117	13.26	13.38	16.33	13.07	13.17	16.13	13.34	13.35	16.35	-10.38	-10.60	-7.48	8.87	30
	6695	149	13.71	13.37	16.55	13.45	13.11	16.30	13.56	13.24	16.42	-10.38	-10.60	-7.48	9.08	30
	6855	181	13.66	12.95	16.33	13.40	12.74	16.09	13.53	12.96	16.26	-10.38	-10.60	-7.48	8.85	30

Mode: EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	8.36	8.52	11.45	-	-	-	8.30	8.44	11.38	-10.07	-9.91	-6.98	4.47	30
	6175	45	13.42	13.10	16.28	-	-	-	13.48	13.06	16.28	-10.07	-9.91	-6.98	9.30	30
	6415	93	13.47	13.40	16.45	-	-	-	13.50	13.36	16.44	-10.07	-9.91	-6.98	9.47	30
UNII7	6535	117	13.14	13.34	16.26	-	-	-	13.20	13.30	16.26	-10.38	-10.60	-7.48	8.78	30
	6695	149	13.58	13.27	16.44	-	-	-	13.48	13.16	16.33	-10.38	-10.60	-7.48	8.96	30
	6855	181	13.56	12.86	16.23	-	-	-	13.48	12.84	16.18	-10.38	-10.60	-7.48	8.75	30

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	10.83	10.95	13.90	-	-	-	-10.07	-9.91	-6.98	6.92	30
	6175	45	-	-	-	16.29	15.61	18.97	-	-	-	-10.07	-9.91	-6.98	11.99	30
	6415	93	-	-	-	16.35	15.20	18.82	-	-	-	-10.07	-9.91	-6.98	11.84	30
UNII7	6535	117	-	-	-	16.09	16.01	19.06	-	-	-	-10.38	-10.60	-7.48	11.58	30
	6695	149	-	-	-	16.27	15.73	19.02	-	-	-	-10.38	-10.60	-7.48	11.54	30
	6855	181	-	-	-	16.35	15.89	19.14	-	-	-	-10.38	-10.60	-7.48	11.66	30

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	7.89	7.89	10.90	-	-	-	-10.07	-9.91	-6.98	3.92	30
	6175	45	-	-	-	15.88	15.21	18.57	-	-	-	-10.07	-9.91	-6.98	11.59	30
	6415	93	-	-	-	15.96	14.78	18.42	-	-	-	-10.07	-9.91	-6.98	11.44	30
UNII7	6535	117	-	-	-	15.68	15.60	18.65	-	-	-	-10.38	-10.60	-7.48	11.17	30
	6695	149	-	-	-	15.85	15.32	18.61	-	-	-	-10.38	-10.60	-7.48	11.13	30
	6855	181	-	-	-	15.95	15.47	18.73	-	-	-	-10.38	-10.60	-7.48	11.25	30

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.19	12.45	15.85	13.09	12.13	15.65	13.35	12.33	15.88	-10.07	-9.91	-6.98	8.90	30
	6165	43	13.26	12.83	16.06	13.15	12.70	15.94	13.39	12.82	16.12	-10.07	-9.91	-6.98	9.14	30
	6405	91	13.44	13.00	16.23	13.23	12.83	16.05	13.40	12.96	16.19	-10.07	-9.91	-6.98	9.26	30
UNII7	6565	123	13.42	13.39	16.41	13.30	13.23	16.28	13.37	13.36	16.38	-10.38	-10.60	-7.48	8.94	30
	6685	147	13.73	13.31	16.54	13.44	13.10	16.28	13.45	13.13	16.30	-10.38	-10.60	-7.48	9.06	30
	6845	179	13.62	12.92	16.29	13.43	12.65	16.07	13.44	12.81	16.15	-10.38	-10.60	-7.48	8.82	30

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.16	12.46	15.83	13.08	12.17	15.66	13.36	12.28	15.86	-10.07	-9.91	-6.98	8.88	30
	6165	43	13.26	12.83	16.06	13.14	12.67	15.92	13.37	12.82	16.11	-10.07	-9.91	-6.98	9.13	30
	6405	91	13.45	12.98	16.23	13.19	12.79	16.01	13.41	12.93	16.19	-10.07	-9.91	-6.98	9.25	30
UNII7	6565	123	13.44	13.38	16.42	13.28	13.19	16.25	13.37	13.34	16.37	-10.38	-10.60	-7.48	8.94	30
	6685	147	13.71	13.32	16.53	13.42	13.10	16.27	13.43	13.16	16.31	-10.38	-10.60	-7.48	9.05	30
	6845	179	13.63	12.93	16.30	13.37	12.64	16.03	13.43	12.81	16.14	-10.38	-10.60	-7.48	8.83	30

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.16	12.42	15.82	12.98	12.10	15.57	13.33	12.32	15.86	-10.07	-9.91	-6.98	8.88	30
	6165	43	13.30	12.84	16.09	13.21	12.65	15.95	13.36	12.81	16.10	-10.07	-9.91	-6.98	9.13	30
	6405	91	13.42	12.97	16.22	13.20	12.71	15.97	13.37	12.90	16.15	-10.07	-9.91	-6.98	9.24	30
UNII7	6565	123	13.43	13.38	16.41	13.28	13.19	16.25	13.39	13.34	16.37	-10.38	-10.60	-7.48	8.93	30
	6685	147	13.65	13.28	16.48	13.40	13.10	16.26	13.45	13.15	16.31	-10.38	-10.60	-7.48	9.00	30
	6845	179	13.60	12.89	16.27	13.38	12.71	16.07	13.46	12.79	16.15	-10.38	-10.60	-7.48	8.79	30

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	15.84	15.62	18.74	-	-	-	16.02	15.59	18.82	-10.07	-9.91	-6.98	11.84	30
	6165	43	16.14	15.42	18.81	-	-	-	16.16	15.43	18.82	-10.07	-9.91	-6.98	11.84	30
	6405	91	16.13	15.34	18.76	-	-	-	16.10	15.36	18.76	-10.07	-9.91	-6.98	11.78	30
UNII7	6565	123	16.18	16.30	19.25	-	-	-	16.17	16.36	19.28	-10.38	-10.60	-7.48	11.80	30
	6685	147	16.31	15.61	18.98	-	-	-	16.18	15.50	18.87	-10.38	-10.60	-7.48	11.50	30
	6845	179	16.36	15.86	19.13	-	-	-	16.28	15.78	19.05	-10.38	-10.60	-7.48	11.65	30

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	15.98	15.60	18.80	-	-	-	-10.07	-9.91	-6.98	11.82	30
	6165	43	-	-	-	16.21	15.43	18.85	-	-	-	-10.07	-9.91	-6.98	11.87	30
	6405	91	-	-	-	16.17	15.37	18.80	-	-	-	-10.07	-9.91	-6.98	11.82	30
UNII7	6565	123	-	-	-	16.21	16.33	19.28	-	-	-	-10.38	-10.60	-7.48	11.80	30
	6685	147	-	-	-	16.31	15.59	18.97	-	-	-	-10.38	-10.60	-7.48	11.49	30
	6845	179	-	-	-	16.37	15.82	19.11	-	-	-	-10.38	-10.60	-7.48	11.64	30

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-	-	-	15.63	15.25	18.46	-	-	-	-10.07	-9.91	-6.98	11.48	30
	6165	43	-	-	-	15.88	15.11	18.52	-	-	-	-10.07	-9.91	-6.98	11.54	30
	6405	91	-	-	-	15.84	15.10	18.49	-	-	-	-10.07	-9.91	-6.98	11.52	30
UNII7	6565	123	-	-	-	15.86	16.03	18.95	-	-	-	-10.38	-10.60	-7.48	11.48	30
	6685	147	-	-	-	15.96	15.31	18.66	-	-	-	-10.38	-10.60	-7.48	11.18	30
	6845	179	-	-	-	16.03	15.56	18.81	-	-	-	-10.38	-10.60	-7.48	11.33	30

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	13.02	12.03	15.56	13.23	11.95	15.65	13.20	11.98	15.65	-10.07	-9.91	-6.98	8.67	30
	6145	39	13.05	12.53	15.81	13.11	12.66	15.90	13.23	12.67	15.97	-10.07	-9.91	-6.98	8.99	30
	6385	87	13.45	13.13	16.30	13.32	13.26	16.30	13.26	13.22	16.25	-10.07	-9.91	-6.98	9.32	30
UNII7	6625	135	13.28	13.31	16.31	13.19	13.04	16.13	13.28	12.98	16.14	-10.38	-10.60	-7.48	8.83	30
	6705	151	13.57	13.22	16.41	13.37	13.04	16.22	13.39	12.83	16.13	-10.38	-10.60	-7.48	8.93	30
	6785	167	13.61	13.18	16.41	13.51	13.11	16.33	13.61	13.14	16.39	-10.38	-10.60	-7.48	8.93	30

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	13.11	12.12	15.65	13.35	12.07	15.77	13.33	12.11	15.77	-10.07	-9.91	-6.98	8.79	30
	6145	39	13.20	12.70	15.97	13.26	12.79	16.05	13.35	12.80	16.10	-10.07	-9.91	-6.98	9.12	30
	6385	87	13.57	13.26	16.43	13.42	13.36	16.40	13.42	13.33	16.38	-10.07	-9.91	-6.98	9.45	30
UNII7	6625	135	13.36	13.43	16.41	13.31	13.15	16.24	13.46	13.10	16.29	-10.38	-10.60	-7.48	8.93	30
	6705	151	13.68	13.35	16.53	13.46	13.14	16.31	13.54	12.96	16.27	-10.38	-10.60	-7.48	9.05	30
	6785	167	13.72	13.28	16.51	13.58	13.21	16.41	13.72	13.31	16.53	-10.38	-10.60	-7.48	9.05	30

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	13.06	12.10	15.62	13.32	12.04	15.74	13.26	12.11	15.73	-10.07	-9.91	-6.98	8.76	30
	6145	39	13.14	12.65	15.91	13.21	12.73	15.99	13.31	12.76	16.05	-10.07	-9.91	-6.98	9.08	30
	6385	87	13.55	13.18	16.38	13.38	13.29	16.35	13.36	13.30	16.34	-10.07	-9.91	-6.98	9.40	30
UNII7	6625	135	13.35	13.38	16.37	13.29	13.10	16.20	13.44	13.07	16.27	-10.38	-10.60	-7.48	8.90	30
	6705	151	13.63	13.29	16.48	13.44	13.07	16.27	13.49	12.91	16.22	-10.38	-10.60	-7.48	9.00	30
	6785	167	13.69	13.23	16.48	13.58	13.17	16.39	13.70	13.29	16.51	-10.38	-10.60	-7.48	9.03	30

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	15.87	15.47	18.68	16.03	15.43	18.75	16.13	15.52	18.84	-10.07	-9.91	-6.98	11.86	30
	6145	39	16.07	15.39	18.76	16.06	15.44	18.77	16.24	15.52	18.91	-10.07	-9.91	-6.98	11.93	30
	6385	87	16.40	15.53	18.99	16.35	15.61	19.01	16.16	15.63	18.91	-10.07	-9.91	-6.98	12.03	30
UNII7	6625	135	16.10	16.46	19.29	16.12	16.36	19.25	16.26	16.16	19.22	-10.38	-10.60	-7.48	11.81	30
	6705	151	16.38	16.24	19.32	16.27	16.16	19.23	16.30	15.93	19.13	-10.38	-10.60	-7.48	11.84	30
	6785	167	16.56	16.11	19.35	16.53	16.09	19.32	16.60	16.14	19.39	-10.38	-10.60	-7.48	11.91	30

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	15.97	15.45	18.73	-	-	-	16.13	15.48	18.83	-10.07	-9.91	-6.98	11.85	30
	6145	39	16.08	15.38	18.76	-	-	-	16.27	15.55	18.94	-10.07	-9.91	-6.98	11.96	30
	6385	87	16.41	15.58	19.03	-	-	-	16.24	15.66	18.97	-10.07	-9.91	-6.98	12.05	30
UNII7	6625	135	16.15	16.40	19.29				16.22	16.18	19.21	-10.38	-10.60	-7.48	11.81	30
	6705	151	16.35	16.21	19.29	-	-	-	16.33	16.01	19.18	-10.38	-10.60	-7.48	11.81	30
	6785	167	16.58	16.09	19.35				16.59	16.12	19.37	-10.38	-10.60	-7.48	11.89	30

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	15.01	14.41	17.73	-	-	-	-10.07	-9.91	-6.98	10.75	30
	6145	39	-	-	-	15.13	14.12	17.66	-	-	-	-10.07	-9.91	-6.98	10.69	30
	6385	87	-	-	-	15.30	14.64	17.99	-	-	-	-10.07	-9.91	-6.98	11.01	30
UNII7	6625	135				15.18	15.25	18.23				-10.38	-10.60	-7.48	10.75	30
	6705	151	-	-	-	15.33	14.94	18.15	-	-	-	-10.38	-10.60	-7.48	10.67	30
	6785	167				15.55	15.04	18.31				-10.38	-10.60	-7.48	10.84	30

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	14.69	14.17	17.45	-	-	-	-10.07	-9.91	-6.98	10.47	30
	6145	39	-	-	-	14.86	13.89	17.41	-	-	-	-10.07	-9.91	-6.98	10.43	30
	6385	87	-	-	-	15.01	14.42	17.74	-	-	-	-10.07	-9.91	-6.98	10.76	30
UNII7	6625	135				14.90	15.03	17.98				-10.38	-10.60	-7.48	10.50	30
	6705	151	-	-	-	15.05	14.71	17.90	-	-	-	-10.38	-10.60	-7.48	10.42	30
	6785	167				15.28	14.81	18.06				-10.38	-10.60	-7.48	10.58	30

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.79	11.93	15.39	13.18	12.07	15.67	13.27	12.18	15.77	-10.07	-9.91	-6.98	8.79	30
	6185	47	13.02	12.74	15.90	13.27	13.00	16.15	13.39	13.05	16.23	-10.07	-9.91	-6.98	9.25	30
	6345	79	13.48	13.21	16.36	13.39	13.30	16.35	13.58	13.39	16.50	-10.07	-9.91	-6.98	9.52	30
UNII7	6665	143	13.16	12.60	15.90	13.31	12.54	15.95	13.45	12.51	16.01	-10.38	-10.60	-7.48	8.53	30

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.84	11.95	15.43	13.23	12.05	15.69	13.29	12.16	15.77	-10.07	-9.91	-6.98	8.79	30
	6185	47	13.11	12.76	15.95	13.25	13.04	16.16	13.37	13.01	16.20	-10.07	-9.91	-6.98	9.23	30
	6345	79	13.56	13.24	16.41	13.42	13.33	16.39	13.58	13.39	16.49	-10.07	-9.91	-6.98	9.52	30
UNII7	6665	143	13.24	12.67	15.98	13.31	12.54	15.95	13.46	12.49	16.01	-10.38	-10.60	-7.48	8.53	30

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.05	12.11	15.61	13.41	12.22	15.87	13.42	12.33	15.92	-10.07	-9.91	-6.98	8.94	30
	6185	47	13.26	12.92	16.10	13.43	13.16	16.31	13.55	13.16	16.37	-10.07	-9.91	-6.98	9.39	30
	6345	79	13.72	13.42	16.58	13.56	13.45	16.52	13.70	13.53	16.63	-10.07	-9.91	-6.98	9.65	30
UNII7	6665	143	13.42	12.81	16.14	13.45	12.62	16.07	13.61	12.59	16.14	-10.38	-10.60	-7.48	8.66	30

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	15.84	15.33	18.60	16.03	15.34	18.71	16.20	15.55	18.90	-10.07	-9.91	-6.98	11.92	30
	6185	47	16.15	15.48	18.83	16.15	15.52	18.86	16.32	15.69	19.03	-10.07	-9.91	-6.98	12.05	30
	6345	79	16.53	15.74	19.16	16.36	15.73	19.07	16.43	15.82	19.14	-10.07	-9.91	-6.98	12.18	30
UNII7	6665	143	16.27	15.82	19.06	16.32	15.77	19.06	16.42	15.59	19.03	-10.38	-10.60	-7.48	11.58	30

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.00	15.38	18.71	-	-	-	16.28	15.55	18.94	-10.07	-9.91	-6.98	11.96	30
	6185	47	16.21	15.56	18.90	-	-	-	16.39	15.72	19.08	-10.07	-9.91	-6.98	12.10	30
	6345	79	16.50	15.77	19.16	-	-	-	16.47	15.83	19.17	-10.07	-9.91	-6.98	12.19	30
UNII7	6665	143	16.31	15.80	19.07	-	-	-	16.41	15.59	19.03	-10.38	-10.60	-7.48	11.59	30

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.16	14.33	17.78	-	-	-	-10.07	-9.91	-6.98	10.80	30
	6185	47	-	-	-	15.22	14.44	17.86	-	-	-	-10.07	-9.91	-6.98	10.88	30
	6345	79	-	-	-	15.44	14.81	18.14	-	-	-	-10.07	-9.91	-6.98	11.16	30
UNII7	6665	143	-	-	-	15.29	14.72	18.03	-	-	-	-10.38	-10.60	-7.48	10.55	30

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.31	12.19	15.80	13.55	12.31	15.99	13.51	12.23	15.93	-10.07	-9.91	-6.98	9.01	30
	6185	47	13.32	13.03	16.18	13.27	13.15	16.22	13.39	13.20	16.30	-10.07	-9.91	-6.98	9.33	30
	6345	79	13.54	13.43	16.49	13.40	13.58	16.50	13.28	13.41	16.36	-10.07	-9.91	-6.98	9.52	30
UNII7	6665	143	13.49	12.48	16.02	13.34	12.33	15.88	13.27	12.07	15.72	-10.38	-10.60	-7.48	8.55	30

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.33	12.24	15.83	13.57	12.27	15.98	13.52	12.23	15.93	-10.07	-9.91	-6.98	9.00	30
	6185	47	13.31	13.09	16.21	13.31	13.16	16.24	13.44	13.21	16.34	-10.07	-9.91	-6.98	9.36	30
	6345	79	13.56	13.43	16.51	13.45	13.54	16.51	13.33	13.39	16.37	-10.07	-9.91	-6.98	9.53	30
UNII7	6665	143	13.50	12.49	16.03	13.37	12.36	15.90	13.28	12.07	15.73	-10.38	-10.60	-7.48	8.55	30

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.43	12.36	15.94	13.69	12.45	16.12	13.68	12.38	16.09	-10.07	-9.91	-6.98	9.14	30
	6185	47	13.45	13.17	16.32	13.44	13.28	16.37	13.55	13.36	16.47	-10.07	-9.91	-6.98	9.49	30
	6345	79	13.68	13.54	16.62	13.54	13.67	16.62	13.45	13.56	16.52	-10.07	-9.91	-6.98	9.65	30
UNII7	6665	143	13.66	12.60	16.18	13.50	12.47	16.02	13.46	12.23	15.90	-10.38	-10.60	-7.48	8.70	30

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.22	15.62	18.94	16.33	15.65	19.02	16.43	15.63	19.06	-10.07	-9.91	-6.98	12.08	30
	6185	47	16.27	15.69	19.00	16.20	15.71	18.98	16.35	15.93	19.16	-10.07	-9.91	-6.98	12.18	30
	6345	79	16.44	15.86	19.17	16.40	15.94	19.18	16.23	15.94	19.10	-10.07	-9.91	-6.98	12.20	30
UNII7	6665	143	16.39	15.55	19.00	16.27	15.49	18.90	16.30	15.29	18.84	-10.38	-10.60	-7.48	11.52	30

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.35	15.62	19.01	-	-	-	16.53	15.68	19.14	-10.07	-9.91	-6.98	12.16	30
	6185	47	16.27	15.74	19.03	-	-	-	16.37	15.91	19.15	-10.07	-9.91	-6.98	12.18	30
	6345	79	16.46	15.92	19.21	-	-	-	16.29	15.98	19.15	-10.07	-9.91	-6.98	12.23	30
UNII7	6665	143	16.37	15.53	18.98	-	-	-	16.35	15.36	18.89	-10.38	-10.60	-7.48	11.50	30

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.43	14.53	18.02	-	-	-	-10.07	-9.91	-6.98	11.04	30
	6185	47	-	-	-	15.32	14.71	18.03	-	-	-	-10.07	-9.91	-6.98	11.05	30
	6345	79	-	-	-	15.37	14.99	18.19	-	-	-	-10.07	-9.91	-6.98	11.21	30
UNII7	6665	143	-	-	-	15.31	14.50	17.93	-	-	-	-10.38	-10.60	-7.48	10.45	30

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	13.72	12.43	16.14	-	-	-	-10.07	-9.91	-6.98	9.16	30
	6185	47	-	-	-	13.74	13.41	16.59	-	-	-	-10.07	-9.91	-6.98	9.61	30
	6345	79	-	-	-	13.89	13.10	16.52	-	-	-	-10.07	-9.91	-6.98	9.54	30
UNII7	6665	143	-	-	-	13.76	13.17	16.49	-	-	-	-10.38	-10.60	-7.48	9.01	30

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	14.37	13.02	16.76	-	-	-	-10.07	-9.91	-6.98	9.78	30
	6185	47	-	-	-	14.34	13.99	17.18	-	-	-	-10.07	-9.91	-6.98	10.20	30
	6345	79	-	-	-	14.49	13.69	17.11	-	-	-	-10.07	-9.91	-6.98	10.14	30
UNII7	6665	143	-	-	-	14.39	13.75	17.09	-	-	-	-10.38	-10.60	-7.48	9.61	30

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	11.39	11.00	14.21	11.75	11.04	14.42	11.82	11.38	14.62	-10.07	-9.91	-6.98	7.64	30
	6265	63	12.41	11.09	14.81	12.50	11.49	15.03	12.74	11.58	15.21	-10.07	-9.91	-6.98	8.23	30
UNII5 52T	6105	31	11.45	11.15	14.31	11.75	11.12	14.46	11.85	11.40	14.64	-10.07	-9.91	-6.98	7.66	30
	6265	63	12.40	11.27	14.88	12.58	11.54	15.10	12.77	11.67	15.27	-10.07	-9.91	-6.98	8.29	30
UNII5 106T	6105	31	11.44	11.21	14.34	11.82	11.20	14.53	11.91	11.43	14.69	-10.07	-9.91	-6.98	7.71	30
	6265	63	12.47	11.32	14.94	12.61	11.54	15.12	12.81	11.62	15.26	-10.07	-9.91	-6.98	8.28	30
UNII5 242T	6105	31	15.47	14.80	18.16	15.59	14.78	18.21	15.79	15.00	18.43	-10.07	-9.91	-6.98	11.45	30
	6265	63	16.74	15.54	19.20	16.73	15.59	19.20	16.94	15.74	19.39	-10.07	-9.91	-6.98	12.41	30
UNII5 484T	6105	31	15.58	14.82	18.23	-	-	-	15.83	14.97	18.43	-10.07	-9.91	-6.98	11.45	30
	6265	63	16.76	15.59	19.22	-	-	-	16.93	15.74	19.39	-10.07	-9.91	-6.98	12.41	30
UNII5 996T	6105	31	-	-	-	14.65	13.74	17.23	-	-	-	-10.07	-9.91	-6.98	10.25	30
	6265	63	-	-	-	15.77	14.67	18.26	-	-	-	-10.07	-9.91	-6.98	11.28	30

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	11.74	11.31	14.54	11.96	11.37	14.68	12.28	11.70	15.01	-10.07	-9.91	-6.98	8.03	30
	6265	63	12.54	11.47	15.05	12.53	11.64	15.12	12.93	12.02	15.51	-10.07	-9.91	-6.98	8.53	30
UNII5 52T	6105	31	11.75	11.33	14.55	11.91	11.42	14.68	12.28	11.63	14.97	-10.07	-9.91	-6.98	8.00	30
	6265	63	12.54	11.50	15.07	12.53	11.61	15.10	12.96	12.00	15.52	-10.07	-9.91	-6.98	8.54	30
UNII5 106T	6105	31	11.76	11.35	14.57	11.97	11.42	14.71	12.19	11.61	14.92	-10.07	-9.91	-6.98	7.94	30
	6265	63	12.59	11.54	15.11	12.57	11.61	15.13	12.90	11.99	15.47	-10.07	-9.91	-6.98	8.50	30
UNII5 242T	6105	31	15.81	15.14	18.50	15.96	15.17	18.59	16.07	15.21	18.67	-10.07	-9.91	-6.98	11.69	30
	6265	63	16.86	15.81	19.37	16.79	15.82	19.34	16.97	15.99	19.52	-10.07	-9.91	-6.98	12.54	30
UNII5 484T	6105	31	15.92	15.15	18.57	-	-	-	16.12	15.20	18.70	-10.07	-9.91	-6.98	11.72	30
	6265	63	16.84	15.82	19.37	-	-	-	16.95	15.98	19.50	-10.07	-9.91	-6.98	12.52	30
UNII5 996T	6105	31	-	-	-	15.00	14.03	17.55	-	-	-	-10.07	-9.91	-6.98	10.57	30
	6265	63	-	-	-	15.83	14.89	18.39	-	-	-	-10.07	-9.91	-6.98	11.42	30

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	12.27	11.79	15.05	12.39	11.92	15.17	12.15	11.60	14.89	-10.07	-9.91	-6.98	8.19	30
	6265	63	12.92	12.15	15.56	12.79	12.12	15.48	12.52	11.83	15.20	-10.07	-9.91	-6.98	8.58	30
UNII5 52T	6105	31	12.26	11.74	15.02	12.34	11.90	15.13	12.13	11.62	14.90	-10.07	-9.91	-6.98	8.15	30
	6265	63	12.90	12.15	15.55	12.72	12.12	15.44	12.53	11.86	15.22	-10.07	-9.91	-6.98	8.57	30
UNII5 106T	6105	31	12.19	11.65	14.94	12.33	11.84	15.10	12.20	11.62	14.93	-10.07	-9.91	-6.98	8.13	30
	6265	63	12.87	12.07	15.49	12.70	12.08	15.41	12.58	11.90	15.26	-10.07	-9.91	-6.98	8.52	30
UNII5 242T	6105	31	16.02	15.22	18.65	16.03	15.27	18.67	16.21	15.43	18.85	-10.07	-9.91	-6.98	11.87	30
	6265	63	16.93	16.11	19.55	16.77	16.08	19.45	16.85	16.18	19.54	-10.07	-9.91	-6.98	12.57	30
UNII5 484T	6105	31	16.04	15.23	18.66	-	-	-	16.23	15.39	18.84	-10.07	-9.91	-6.98	11.86	30
	6265	63	16.87	16.10	19.51	-	-	-	16.79	16.15	19.49	-10.07	-9.91	-6.98	12.53	30
UNII5 996T	6105	31	-	-	-	15.09	14.18	17.67	-	-	-	-10.07	-9.91	-6.98	10.69	30
	6265	63	-	-	-	15.78	15.14	18.48	-	-	-	-10.07	-9.91	-6.98	11.50	30

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	12.29	11.85	15.09	12.20	11.92	15.07	12.26	12.03	15.16	-10.07	-9.91	-6.98	8.18	30
	6265	63	12.58	12.07	15.34	12.51	12.15	15.35	12.38	12.02	15.22	-10.07	-9.91	-6.98	8.37	30
UNII5 52T	6105	31	12.28	11.88	15.10	12.20	11.91	15.07	12.30	12.05	15.19	-10.07	-9.91	-6.98	8.21	30
	6265	63	12.65	12.12	15.40	12.57	12.18	15.39	12.41	12.09	15.26	-10.07	-9.91	-6.98	8.42	30
UNII5 106T	6105	31	12.25	11.87	15.08	12.22	11.88	15.06	12.38	12.05	15.23	-10.07	-9.91	-6.98	8.25	30
	6265	63	12.64	12.07	15.37	12.52	12.17	15.36	12.43	12.09	15.27	-10.07	-9.91	-6.98	8.40	30
UNII5 242T	6105	31	16.15	15.42	18.81	16.05	15.44	18.76	16.26	15.65	18.98	-10.07	-9.91	-6.98	12.00	30
	6265	63	16.83	16.18	19.52	16.79	16.27	19.55	16.58	16.26	19.43	-10.07	-9.91	-6.98	12.57	30
UNII5 484T	6105	31	16.16	15.48	18.84	-	-	-	16.22	15.64	18.95	-10.07	-9.91	-6.98	11.97	30
	6265	63	16.83	16.28	19.57	-	-	-	16.63	16.31	19.48	-10.07	-9.91	-6.98	12.59	30
UNII5 996T	6105	31	-	-	-	15.14	14.41	17.80	-	-	-	-10.07	-9.91	-6.98	10.82	30
	6265	63	-	-	-	15.67	15.31	18.50	-	-	-	-10.07	-9.91	-6.98	11.52	30

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	-	-	-	12.84	12.50	15.68	-	-	-	-10.07	-9.91	-6.98	8.70	30
	6265	63	-	-	-	13.83	12.74	16.33	-	-	-	-10.07	-9.91	-6.98	9.35	30
UNII5 160U	6105	31	-	-	-	13.10	12.81	15.97	-	-	-	-10.07	-9.91	-6.98	8.99	30
	6265	63	-	-	-	13.76	13.11	16.46	-	-	-	-10.07	-9.91	-6.98	9.48	30

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 4x996T	6105	31	-	-	-	12.92	12.60	15.77	-	-	-	-10.07	-9.91	-6.98	8.79	30
	6265	63	-	-	-	13.75	12.86	16.34	-	-	-	-10.07	-9.91	-6.98	9.36	30
UNII5 SU	6105	31	-	-	-	13.39	13.08	16.25	-	-	-	-10.07	-9.91	-6.98	9.27	30
	6265	63	-	-	-	14.22	13.39	16.84	-	-	-	-10.07	-9.91	-6.98	9.86	30

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	8.53	8.36	11.45	-	-	-	-10.07	-9.91	-6.98	4.48	30
	6175	45	-	-	-	15.92	15.30	18.63	-	-	-	-10.07	-9.91	-6.98	11.65	30
	6415	93	-	-	-	16.00	14.88	18.48	-	-	-	-10.07	-9.91	-6.98	11.50	30
UNII7	6535	117	-	-	-	15.70	15.66	18.69	-	-	-	-10.38	-10.60	-7.48	11.21	30
	6695	149	-	-	-	15.87	15.39	18.65	-	-	-	-10.38	-10.60	-7.48	11.17	30
	6855	181	-	-	-	15.95	15.53	18.76	-	-	-	-10.38	-10.60	-7.48	11.28	30

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	13.08	13.16	16.13	12.97	13.02	16.01	13.05	13.07	16.07	-10.07	-9.91	-6.98	9.15	30
	6175	45	13.49	13.10	16.31	13.38	13.01	16.21	13.52	13.11	16.33	-10.07	-9.91	-6.98	9.35	30
	6415	93	13.54	13.40	16.48	13.43	13.29	16.37	13.55	13.40	16.49	-10.07	-9.91	-6.98	9.51	30
UNII7	6535	117	13.19	13.38	16.30	13.10	13.26	16.19	13.22	13.34	16.29	-10.38	-10.60	-7.48	8.82	30
	6695	149	13.64	13.30	16.49	13.50	13.15	16.34	13.57	13.23	16.41	-10.38	-10.60	-7.48	9.01	30
	6855	181	13.56	12.90	16.26	13.44	12.79	16.14	13.49	12.90	16.22	-10.38	-10.60	-7.48	8.78	30

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	8.35	8.25	11.31	-	-	-	8.32	8.25	11.29	-10.07	-9.91	-6.98	4.33	30
	6165	43	13.42	13.07	16.26	-	-	-	13.48	13.06	16.28	-10.07	-9.91	-6.98	9.30	30
	6405	91	13.47	13.39	16.44	-	-	-	13.49	13.37	16.44	-10.07	-9.91	-6.98	9.46	30
UNII7	6565	123	13.09	13.32	16.22	-	-	-	13.15	13.30	16.24	-10.38	-10.60	-7.48	8.76	30
	6685	147	13.56	13.25	16.42	-	-	-	13.51	13.16	16.35	-10.38	-10.60	-7.48	8.94	30
	6845	179	13.50	12.85	16.20	-	-	-	13.44	12.84	16.16	-10.38	-10.60	-7.48	8.72	30

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.12	12.45	15.81	12.95	12.20	15.60	13.30	12.38	15.87	-10.07	-9.91	-6.98	8.89	30
	6165	43	13.32	12.86	16.11	13.23	12.73	16.00	13.40	12.85	16.14	-10.07	-9.91	-6.98	9.16	30
	6405	91	13.47	13.05	16.28	13.30	12.86	16.09	13.43	13.00	16.23	-10.07	-9.91	-6.98	9.30	30
UNII7	6565	123	13.46	13.48	16.48	13.32	13.32	16.33	13.44	13.48	16.47	-10.38	-10.60	-7.48	9.00	30
	6685	147	13.70	13.37	16.55	13.49	13.19	16.35	13.55	13.22	16.40	-10.38	-10.60	-7.48	9.07	30
	6845	179	13.65	13.01	16.35	13.43	12.85	16.16	13.52	12.92	16.24	-10.38	-10.60	-7.48	8.87	30

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.12	12.34	15.76	12.98	12.15	15.59	13.28	12.28	15.82	-10.07	-9.91	-6.98	8.84	30
	6165	43	13.27	12.82	16.06	13.19	12.67	15.95	13.32	12.83	16.10	-10.07	-9.91	-6.98	9.12	30
	6405	91	13.40	12.97	16.20	13.25	12.83	16.05	13.38	12.95	16.18	-10.07	-9.91	-6.98	9.22	30
UNII7	6565	123	13.41	13.42	16.43	13.27	13.28	16.29	13.39	13.42	16.41	-10.38	-10.60	-7.48	8.95	30
	6685	147	13.61	13.34	16.48	13.44	13.15	16.31	13.49	13.18	16.35	-10.38	-10.60	-7.48	9.01	30
	6845	179	13.60	12.94	16.29	13.39	12.78	16.11	13.46	12.84	16.17	-10.38	-10.60	-7.48	8.81	30

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	13.18	12.16	15.71	13.27	12.02	15.70	13.32	12.12	15.77	-10.07	-9.91	-6.98	8.79	30
	6145	39	13.21	12.69	15.97	13.16	12.68	15.93	13.35	12.79	16.09	-10.07	-9.91	-6.98	9.11	30
	6385	87	13.57	13.24	16.41	13.50	13.33	16.42	13.38	13.34	16.37	-10.07	-9.91	-6.98	9.44	30
UNII7	6625	135	13.38	13.44	16.42	13.35	13.27	16.32	13.44	13.12	16.29	-10.38	-10.60	-7.48	8.94	30
	6705	151	13.68	13.36	16.54	13.47	13.17	16.33	13.53	12.97	16.27	-10.38	-10.60	-7.48	9.06	30
	6785	167	13.71	13.29	16.51	13.60	13.23	16.43	13.74	13.32	16.55	-10.38	-10.60	-7.48	9.07	30

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	13.16	12.10	15.67	13.30	11.98	15.70	13.34	12.08	15.77	-10.07	-9.91	-6.98	8.79	30
	6145	39	13.20	12.65	15.94	13.16	12.66	15.93	13.35	12.75	16.07	-10.07	-9.91	-6.98	9.09	30
	6385	87	13.55	13.22	16.40	13.50	13.31	16.41	13.38	13.29	16.34	-10.07	-9.91	-6.98	9.43	30
UNII7	6625	135	13.38	13.39	16.39	13.37	13.24	16.32	13.45	13.08	16.28	-10.38	-10.60	-7.48	8.92	30
	6705	151	13.64	13.29	16.48	13.47	13.16	16.32	13.50	12.93	16.24	-10.38	-10.60	-7.48	9.00	30
	6785	167	13.70	13.25	16.49	13.62	13.17	16.41	13.75	13.29	16.54	-10.38	-10.60	-7.48	9.06	30

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	16.32	15.51	18.94	16.14	15.50	18.84	16.12	15.46	18.81	-10.07	-9.91	-6.98	11.97	30
	6145	39	16.28	15.56	18.94	16.24	15.53	18.91	16.16	15.49	18.85	-10.07	-9.91	-6.98	11.96	30
	6385	87	16.36	15.69	19.05	16.32	15.66	19.01	16.34	15.65	19.02	-10.07	-9.91	-6.98	12.07	30
UNII7	6625	135	16.28	16.31	19.30	16.24	16.32	19.29	16.17	16.39	19.30	-10.38	-10.60	-7.48	11.82	30
	6705	151	16.38	16.12	19.26	16.38	16.13	19.26	16.36	16.19	19.28	-10.38	-10.60	-7.48	11.81	30
	6785	167	16.67	16.15	19.43	16.63	16.14	19.40	16.58	16.13	19.37	-10.38	-10.60	-7.48	11.95	30

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.04	12.03	15.58	13.34	12.04	15.75	13.38	12.24	15.86	-10.07	-9.91	-6.98	8.88	30
	6185	47	13.23	12.88	16.07	13.31	13.01	16.17	13.43	13.11	16.28	-10.07	-9.91	-6.98	9.30	30
	6345	79	13.69	13.42	16.57	13.55	13.38	16.47	13.60	13.47	16.55	-10.07	-9.91	-6.98	9.59	30
UNII7	6665	143	13.37	12.80	16.10	13.44	12.73	16.11	13.51	12.56	16.07	-10.38	-10.60	-7.48	8.63	30

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.09	12.08	15.63	13.37	12.13	15.80	13.43	12.27	15.90	-10.07	-9.91	-6.98	8.92	30
	6185	47	13.29	12.90	16.11	13.37	13.02	16.21	13.50	13.11	16.32	-10.07	-9.91	-6.98	9.34	30
	6345	79	13.71	13.42	16.58	13.61	13.44	16.53	13.66	13.50	16.59	-10.07	-9.91	-6.98	9.61	30
UNII7	6665	143	13.35	12.71	16.05	13.45	12.72	16.11	13.53	12.54	16.08	-10.38	-10.60	-7.48	8.63	30

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.26	15.47	18.89	16.15	15.45	18.83	16.06	15.34	18.73	-10.07	-9.91	-6.98	11.91	30
	6185	47	16.37	15.69	19.05	16.32	15.66	19.01	16.23	15.58	18.93	-10.07	-9.91	-6.98	12.07	30
	6345	79	16.51	15.87	19.21	16.51	15.84	19.20	16.46	15.79	19.15	-10.07	-9.91	-6.98	12.23	30
UNII7	6665	143	16.42	15.67	19.07	16.39	15.68	19.06	16.31	15.73	19.04	-10.38	-10.60	-7.48	11.59	30

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.38	12.25	15.86	13.51	12.21	15.92	13.62	12.25	16.00	-10.07	-9.91	-6.98	9.02	30
	6185	47	13.39	13.04	16.23	13.32	13.11	16.23	13.45	13.27	16.37	-10.07	-9.91	-6.98	9.39	30
	6345	79	13.57	13.48	16.53	13.54	13.52	16.54	13.36	13.48	16.43	-10.07	-9.91	-6.98	9.57	30
UNII7	6665	143	13.52	12.53	16.07	13.37	12.41	15.92	13.37	12.18	15.83	-10.38	-10.60	-7.48	8.59	30

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.42	12.27	15.89	13.55	12.24	15.95	13.65	12.30	16.04	-10.07	-9.91	-6.98	9.06	30
	6185	47	13.41	13.11	16.27	13.36	13.15	16.27	13.49	13.32	16.42	-10.07	-9.91	-6.98	9.44	30
	6345	79	13.61	13.49	16.56	13.58	13.59	16.59	13.40	13.50	16.46	-10.07	-9.91	-6.98	9.61	30
UNII7	6665	143	13.57	12.53	16.09	13.40	12.43	15.95	13.41	12.19	15.86	-10.38	-10.60	-7.48	8.62	30

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.57	15.72	19.18	16.48	15.68	19.11	16.35	15.63	19.01	-10.07	-9.91	-6.98	12.20	30
	6185	47	16.41	15.90	19.17	16.37	15.89	19.15	16.32	15.80	19.08	-10.07	-9.91	-6.98	12.19	30
	6345	79	16.45	16.03	19.25	16.40	16.00	19.21	16.44	15.98	19.22	-10.07	-9.91	-6.98	12.27	30
UNII7	6665	143	16.42	15.46	18.98	16.43	15.47	18.99	16.39	15.53	18.99	-10.38	-10.60	-7.48	11.51	30

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	15.44	14.51	18.01	15.36	14.44	17.94	15.29	14.38	17.87	-10.07	-9.91	-6.98	11.03	30
	6185	47	15.38	14.66	18.05	15.34	14.60	17.99	15.34	14.54	17.96	-10.07	-9.91	-6.98	11.07	30
	6345	79	15.43	14.97	18.22	15.44	14.95	18.21	15.49	14.90	18.21	-10.07	-9.91	-6.98	11.24	30
UNII7	6665	143	15.36	14.54	17.98	15.34	14.60	18.00	15.37	14.67	18.05	-10.38	-10.60	-7.48	10.57	30

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	15.31	14.41	17.89	15.21	14.40	17.83	15.14	14.33	17.77	-10.07	-9.91	-6.98	10.91	30
	6185	47	15.25	14.64	17.97	15.26	14.63	17.96	15.20	14.59	17.92	-10.07	-9.91	-6.98	10.99	30
	6345	79	15.34	15.01	18.19	15.35	15.00	18.19	15.37	14.95	18.18	-10.07	-9.91	-6.98	11.21	30
UNII7	6665	143	15.30	14.61	17.98	15.26	14.67	17.99	15.25	14.71	18.00	-10.38	-10.60	-7.48	10.52	30

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	11.71	11.31	14.53	11.94	11.24	14.62	12.08	11.51	14.82	-10.07	-9.91	-6.98	7.84	30
	6265	63	12.73	11.46	15.15	12.73	11.53	15.18	12.94	11.75	15.40	-10.07	-9.91	-6.98	8.42	30
UNII5 106T+26T	6105	31	11.80	11.34	14.59	12.06	11.30	14.71	12.16	11.58	14.89	-10.07	-9.91	-6.98	7.91	30
	6265	63	12.79	11.53	15.22	12.85	11.66	15.30	12.99	11.82	15.46	-10.07	-9.91	-6.98	8.48	30
UNII5 484T+242T	6105	31	15.80	14.90	18.39	15.71	14.89	18.33	15.62	14.81	18.24	-10.07	-9.91	-6.98	11.41	30
	6265	63	16.89	15.69	19.34	16.86	15.66	19.31	16.81	15.60	19.26	-10.07	-9.91	-6.98	12.36	30

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	11.95	11.52	14.75	12.23	11.67	14.97	12.34	11.72	15.05	-10.07	-9.91	-6.98	8.07	30
	6265	63	12.71	11.65	15.22	12.84	11.89	15.40	13.01	12.08	15.58	-10.07	-9.91	-6.98	8.60	30
UNII5 106T+26T	6105	31	12.03	11.62	14.84	12.35	11.77	15.08	12.45	11.81	15.15	-10.07	-9.91	-6.98	8.18	30
	6265	63	12.82	11.74	15.33	12.96	11.95	15.49	13.11	12.12	15.66	-10.07	-9.91	-6.98	8.68	30
UNII5 484T+242T	6105	31	16.13	15.13	18.67	16.08	15.12	18.64	16.02	15.11	18.60	-10.07	-9.91	-6.98	11.69	30
	6265	63	16.96	15.90	19.48	16.94	15.88	19.46	16.87	15.79	19.38	-10.07	-9.91	-6.98	12.50	30

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	12.31	11.75	15.05	12.10	11.60	14.87	12.29	11.71	15.02	-10.07	-9.91	-6.98	8.07	30
	6265	63	12.97	12.17	15.60	12.59	11.90	15.27	12.68	12.01	15.37	-10.07	-9.91	-6.98	8.62	30
UNII5 106T+26T	6105	31	12.38	11.83	15.12	12.23	11.72	15.00	12.39	11.82	15.12	-10.07	-9.91	-6.98	8.15	30
	6265	63	13.07	12.20	15.67	12.71	12.05	15.40	12.79	12.08	15.46	-10.07	-9.91	-6.98	8.69	30
UNII5 484T+242T	6105	31	16.17	15.33	18.78	16.15	15.31	18.76	16.08	15.26	18.70	-10.07	-9.91	-6.98	11.80	30
	6265	63	16.84	16.13	19.51	16.86	16.12	19.51	16.83	16.09	19.49	-10.07	-9.91	-6.98	12.53	30

Mode : EHT320(80HH) MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	12.33	11.93	15.14	12.26	11.92	15.10	12.38	12.14	15.27	-10.07	-9.91	-6.98	8.29	30
	6265	63	12.77	12.17	15.49	12.69	12.23	15.48	12.58	12.19	15.40	-10.07	-9.91	-6.98	8.51	30
UNII5 106T+26T	6105	31	12.41	11.97	15.21	12.35	11.99	15.18	12.53	12.20	15.38	-10.07	-9.91	-6.98	8.40	30
	6265	63	12.85	12.24	15.57	12.76	12.30	15.54	12.64	12.22	15.45	-10.07	-9.91	-6.98	8.59	30
UNII5 484T+242T	6105	31	16.25	15.62	18.95	16.22	15.56	18.91	16.15	15.47	18.83	-10.07	-9.91	-6.98	11.97	30
	6265	63	16.74	16.28	19.53	16.72	16.24	19.50	16.76	16.23	19.51	-10.07	-9.91	-6.98	12.55	30

Mode : EHT320(160L/U) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	14.92	13.91	17.45	14.83	13.86	17.38	14.69	13.78	17.27	-10.07	-9.91	-6.98	10.48	30
	6265	63	15.80	14.83	18.35	15.77	14.77	18.31	15.73	14.68	18.25	-10.07	-9.91	-6.98	11.37	30
UNII5 160U	6105	31	15.15	14.30	17.76	15.05	14.21	17.66	15.07	14.17	17.65	-10.07	-9.91	-6.98	10.78	30
	6265	63	15.67	15.19	18.45	15.69	15.16	18.44	15.71	15.12	18.44	-10.07	-9.91	-6.98	11.47	30

Mode : EHT320 MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 3x996T	6105	31	14.07	13.77	16.93	13.95	13.75	16.86	13.90	13.64	16.78	-10.07	-9.91	-6.98	9.95	30
	6265	63	14.86	14.03	17.47	14.84	13.99	17.45	14.88	13.85	17.41	-10.07	-9.91	-6.98	10.49	30
UNII5 2x996T+484T	6105	31	14.15	13.89	17.03	14.01	13.79	16.91	14.19	13.96	17.09	-10.07	-9.91	-6.98	10.11	30
	6265	63	14.97	14.11	17.57	14.96	13.99	17.51	14.95	14.18	17.59	-10.07	-9.91	-6.98	10.61	30
UNII5 3x996T+484T	6105	31	14.25	13.97	17.12	13.97	13.98	16.99	14.15	13.89	17.04	-10.07	-9.91	-6.98	10.14	30
	6265	63	14.67	14.02	17.37	14.91	14.07	17.52	14.96	14.09	17.56	-10.07	-9.91	-6.98	10.58	30

10.3.3 E.I.R.P Output Power(Very Low Power Device)

Very Low Power Device Limit : 14 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.3.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-4.26	-5.51	-1.83	-4.64	-5.86	-2.20	-4.34	-5.51	-1.88	-10.07	-9.91	-6.98	-8.81	14
	6175	45	-4.86	-5.07	-1.95	-5.23	-5.42	-2.32	-4.90	-5.09	-1.98	-10.07	-9.91	-6.98	-8.93	14
UNII6	6415	93	-5.27	-5.41	-2.33	-5.56	-5.80	-2.67	-5.12	-5.46	-2.28	-10.07	-9.91	-6.98	-9.26	14
	6435	97	-5.16	-5.43	-2.28	-5.47	-5.80	-2.62	-5.13	-5.45	-2.27	-10.38	-10.60	-7.48	-9.75	14
	6475	105	-5.27	-5.83	-2.53	-5.60	-6.06	-2.81	-5.20	-5.58	-2.37	-10.38	-10.60	-7.48	-9.85	14
	6515	113	-5.25	-5.60	-2.41	-5.61	-6.00	-2.79	-5.25	-5.69	-2.45	-10.38	-10.60	-7.48	-9.89	14
	6535	117	-5.32	-5.73	-2.51	-5.63	-6.09	-2.85	-5.23	-5.73	-2.47	-10.38	-10.60	-7.48	-9.94	14
UNII7	6695	149	-5.16	-5.67	-2.40	-5.56	-6.01	-2.77	-5.27	-5.70	-2.47	-10.38	-10.60	-7.48	-9.88	14
	6855	181	-4.86	-5.96	-2.36	-5.24	-6.34	-2.74	-4.91	-5.96	-2.39	-10.38	-10.60	-7.48	-9.84	14
UNII8	6875	185	-4.96	-6.01	-2.44	-5.33	-6.35	-2.80	-4.99	-5.96	-2.44	-10.50	-10.12	-7.30	-9.74	14
	6995	209	-4.71	-5.64	-2.14	-5.06	-5.97	-2.48	-4.70	-5.61	-2.12	-10.50	-10.12	-7.30	-9.42	14
	7115	233	-4.27	-7.28	-2.51	-4.63	-7.59	-2.85	-4.29	-7.20	-2.49	-10.50	-10.12	-7.30	-9.79	14

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-1.70	-2.89	0.76	-1.91	-3.06	0.56	-1.76	-2.87	0.73	-10.07	-9.91	-6.98	-6.22	14
	6175	45	-2.13	-2.43	0.73	-2.32	-2.63	0.54	-2.14	-2.45	0.72	-10.07	-9.91	-6.98	-6.25	14
	6415	93	-2.33	-2.26	0.72	-2.52	-2.48	0.51	-2.24	-2.33	0.73	-10.07	-9.91	-6.98	-6.25	14
UNII6	6435	97	-2.19	-2.27	0.78	-2.38	-2.49	0.57	-2.18	-2.32	0.76	-10.38	-10.60	-7.48	-6.70	14
	6475	105	-2.32	-2.67	0.52	-2.46	-2.79	0.38	-2.19	-2.48	0.67	-10.38	-10.60	-7.48	-6.81	14
	6515	113	-2.16	-2.53	0.67	-2.36	-2.76	0.45	-2.18	-2.63	0.61	-10.38	-10.60	-7.48	-6.81	14
UNII7	6535	117	-2.26	-2.81	0.48	-2.44	-3.01	0.29	-2.18	-2.79	0.53	-10.38	-10.60	-7.48	-6.95	14
	6695	149	-2.13	-2.57	0.67	-2.36	-2.77	0.45	-2.23	-2.60	0.60	-10.38	-10.60	-7.48	-6.81	14
	6855	181	-1.84	-2.92	0.67	-2.06	-3.14	0.44	-1.89	-2.95	0.62	-10.38	-10.60	-7.48	-6.81	14
UNII8	6875	185	-1.91	-3.00	0.59	-2.12	-3.19	0.39	-1.95	-2.97	0.58	-10.50	-10.12	-7.30	-6.71	14
	6995	209	-2.01	-3.35	0.39	-2.20	-3.52	0.20	-1.99	-3.32	0.41	-10.50	-10.12	-7.30	-6.89	14
	7115	233	-1.12	-4.48	0.53	-1.36	-4.68	0.30	-1.18	-4.41	0.51	-10.50	-10.12	-7.30	-6.77	14

Mode : EHT20 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	1.44	-0.25	3.69	-	-	-	1.43	-0.35	3.64	-10.07	-9.91	-6.98	-3.29	14
	6175	45	0.57	-0.29	3.17	-	-	-	0.61	-0.33	3.17	-10.07	-9.91	-6.98	-3.81	14
	6415	93	-0.35	-0.34	2.66	-	-	-	-0.33	-0.34	2.68	-10.07	-9.91	-6.98	-4.30	14
UNII6	6435	97	-0.33	-0.14	2.78	-	-	-	-0.32	-0.15	2.78	-10.38	-10.60	-7.48	-4.70	14
	6475	105	-0.20	-0.23	2.80	-	-	-	-0.21	-0.16	2.83	-10.38	-10.60	-7.48	-4.65	14
	6515	113	-0.38	-0.27	2.68	-	-	-	-0.45	-0.36	2.61	-10.38	-10.60	-7.48	-4.80	14
UNII7	6535	117	-0.19	-0.17	2.83	-	-	-	-0.16	-0.19	2.84	-10.38	-10.60	-7.48	-4.64	14
	6695	149	0.27	-0.30	3.01	-	-	-	0.18	-0.38	2.92	-10.38	-10.60	-7.48	-4.47	14
	6855	181	0.40	-0.92	2.80	-	-	-	0.31	-0.90	2.75	-10.38	-10.60	-7.48	-4.68	14
UNII8	6875	185	0.27	-0.92	2.72	-	-	-	0.19	-0.87	2.71	-10.50	-10.12	-7.30	-4.57	14
	6995	209	0.55	-0.38	3.12	-	-	-	0.53	-0.26	3.16	-10.50	-10.12	-7.30	-4.14	14
	7115	233	1.36	-0.73	3.45	-	-	-	1.35	-0.60	3.49	-10.50	-10.12	-7.30	-3.81	14

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	4.63	4.47	7.56	-	-	-	-10.07	-9.91	-6.98	0.58	14
	6175	45	-	-	-	5.54	5.23	8.40	-	-	-	-10.07	-9.91	-6.98	1.42	14
	6415	93	-	-	-	5.63	5.28	8.47	-	-	-	-10.07	-9.91	-6.98	1.49	14
UNII6	6435	97	-	-	-	5.81	4.25	8.11	-	-	-	-10.38	-10.60	-7.48	0.63	14
	6475	105	-	-	-	5.06	3.86	7.51	-	-	-	-10.38	-10.60	-7.48	0.03	14
	6515	113	-	-	-	4.78	4.33	7.57	-	-	-	-10.38	-10.60	-7.48	0.09	14
UNII7	6535	117	-	-	-	4.83	4.27	7.57	-	-	-	-10.38	-10.60	-7.48	0.09	14
	6695	149	-	-	-	5.13	4.91	8.03	-	-	-	-10.38	-10.60	-7.48	0.55	14
	6855	181	-	-	-	5.26	4.79	8.04	-	-	-	-10.38	-10.60	-7.48	0.56	14
UNII8	6875	185	-	-	-	5.08	4.80	7.95	-	-	-	-10.50	-10.12	-7.30	0.66	14
	6995	209	-	-	-	5.34	5.04	8.20	-	-	-	-10.50	-10.12	-7.30	0.90	14
	7115	233	-	-	-	5.10	4.51	7.83	-	-	-	-10.50	-10.12	-7.30	0.53	14

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	4.22	4.09	7.17	-	-	-	-10.07	-9.91	-6.98	0.19	14
	6175	45	-	-	-	5.17	4.86	8.03	-	-	-	-10.07	-9.91	-6.98	1.05	14
	6415	93	-	-	-	5.25	4.91	8.10	-	-	-	-10.07	-9.91	-6.98	1.12	14
UNII6	6435	97	-	-	-	5.44	3.89	7.74	-	-	-	-10.38	-10.60	-7.48	0.26	14
	6475	105	-	-	-	4.70	3.52	7.16	-	-	-	-10.38	-10.60	-7.48	-0.32	14
	6515	113	-	-	-	4.40	3.99	7.21	-	-	-	-10.38	-10.60	-7.48	-0.27	14
UNII7	6535	117	-	-	-	4.44	3.87	7.18	-	-	-	-10.38	-10.60	-7.48	-0.30	14
	6695	149	-	-	-	4.76	4.58	7.68	-	-	-	-10.38	-10.60	-7.48	0.20	14
	6855	181	-	-	-	4.89	4.44	7.68	-	-	-	-10.38	-10.60	-7.48	0.20	14
UNII8	6875	185	-	-	-	4.70	4.45	7.59	-	-	-	-10.50	-10.12	-7.30	0.29	14
	6995	209	-	-	-	4.95	4.70	7.84	-	-	-	-10.50	-10.12	-7.30	0.54	14
	7115	233	-	-	-	4.71	4.11	7.43	-	-	-	-10.50	-10.12	-7.30	0.13	14

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-4.63	-5.98	-2.24	-4.84	-6.12	-2.42	-4.59	-5.82	-2.15	-10.07	-9.91	-6.98	-9.13	14
	6165	43	-4.72	-4.86	-1.78	-4.85	-5.05	-1.94	-4.74	-4.94	-1.83	-10.07	-9.91	-6.98	-8.76	14
	6405	91	-5.12	-5.21	-2.16	-5.24	-5.42	-2.32	-4.98	-5.32	-2.14	-10.07	-9.91	-6.98	-9.12	14
UNII6	6445	99	-5.01	-5.31	-2.14	-5.12	-5.48	-2.28	-5.04	-5.29	-2.15	-10.38	-10.60	-7.48	-9.62	14
	6485	107	-5.09	-5.66	-2.36	-5.17	-5.63	-2.38	-5.04	-5.41	-2.21	-10.38	-10.60	-7.48	-9.69	14
	6525	115	-5.03	-5.49	-2.24	-5.18	-5.76	-2.45	-4.99	-5.62	-2.28	-10.38	-10.60	-7.48	-9.72	14
UNII7	6565	123	-5.05	-5.64	-2.32	-5.18	-5.70	-2.42	-5.02	-5.45	-2.22	-10.38	-10.60	-7.48	-9.70	14
	6685	147	-4.96	-5.21	-2.07	-5.18	-5.27	-2.22	-5.13	-5.16	-2.14	-10.38	-10.60	-7.48	-9.55	14
	6845	179	-4.76	-5.66	-2.18	-4.92	-5.91	-2.38	-4.85	-5.76	-2.27	-10.38	-10.60	-7.48	-9.66	14
UNII8	6885	187	-4.86	-5.86	-2.32	-5.06	-6.00	-2.49	-4.90	-5.88	-2.35	-10.50	-10.12	-7.30	-9.62	14
	7005	211	-4.59	-5.57	-2.04	-4.70	-5.76	-2.19	-4.60	-5.67	-2.09	-10.50	-10.12	-7.30	-9.34	14
	7085	227	-4.34	-7.58	-2.66	-4.61	-7.73	-2.89	-4.58	-7.64	-2.83	-10.50	-10.12	-7.30	-9.95	14

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-1.49	-2.93	0.86	-1.70	-3.11	0.67	-1.45	-2.84	0.92	-10.07	-9.91	-6.98	-6.06	14
	6165	43	-1.47	-1.80	1.38	-1.63	-2.04	1.18	-1.48	-1.89	1.33	-10.07	-9.91	-6.98	-5.60	14
	6405	91	-2.25	-2.11	0.83	-2.37	-2.36	0.64	-2.09	-2.25	0.84	-10.07	-9.91	-6.98	-6.14	14
UNII6	6445	99	-2.01	-2.19	0.91	-2.17	-2.39	0.73	-2.03	-2.18	0.90	-10.38	-10.60	-7.48	-6.57	14
	6485	107	-2.12	-2.57	0.67	-2.21	-2.51	0.65	-2.05	-2.30	0.83	-10.38	-10.60	-7.48	-6.65	14
	6525	115	-2.05	-2.40	0.79	-2.23	-2.67	0.57	-2.01	-2.49	0.77	-10.38	-10.60	-7.48	-6.69	14
UNII7	6565	123	-2.08	-2.67	0.65	-2.21	-2.73	0.55	-2.02	-2.47	0.77	-10.38	-10.60	-7.48	-6.71	14
	6685	147	-1.84	-2.20	1.00	-2.11	-2.31	0.80	-2.03	-2.15	0.92	-10.38	-10.60	-7.48	-6.48	14
	6845	179	-1.76	-2.55	0.88	-1.96	-2.84	0.64	-1.85	-2.70	0.76	-10.38	-10.60	-7.48	-6.60	14
UNII8	6885	187	-1.84	-2.77	0.73	-2.07	-2.95	0.52	-1.88	-2.81	0.69	-10.50	-10.12	-7.30	-6.57	14
	7005	211	-1.41	-2.66	1.02	-1.60	-2.84	0.84	-1.50	-2.71	0.95	-10.50	-10.12	-7.30	-6.28	14
	7085	227	-1.40	-4.56	0.31	-1.68	-4.76	0.06	-1.60	-4.62	0.16	-10.50	-10.12	-7.30	-6.98	14

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	1.55	-0.32	3.73	1.34	-0.65	3.47	1.53	-0.64	3.59	-10.07	-9.91	-6.98	-3.25	14
	6165	43	0.67	-0.01	3.35	0.55	-0.18	3.21	0.76	-0.09	3.37	-10.07	-9.91	-6.98	-3.61	14
	6405	91	-0.12	-0.09	2.91	-0.31	-0.25	2.73	-0.16	-0.08	2.89	-10.07	-9.91	-6.98	-4.07	14
UNII6	6445	99	-0.15	0.10	2.99	-0.32	-0.03	2.84	-0.16	0.01	2.94	-10.38	-10.60	-7.48	-4.49	14
	6485	107	-0.02	-0.06	2.97	-0.18	-0.11	2.86	-0.16	0.10	2.98	-10.38	-10.60	-7.48	-4.50	14
	6525	115	-0.21	-0.04	2.89	-0.44	-0.26	2.66	-0.25	-0.16	2.80	-10.38	-10.60	-7.48	-4.59	14
UNII7	6565	123	0.06	-0.01	3.03	-0.12	-0.17	2.87	-0.06	-0.03	2.97	-10.38	-10.60	-7.48	-4.44	14
	6685	147	0.35	0.04	3.21	0.12	-0.14	3.00	0.09	-0.10	3.01	-10.38	-10.60	-7.48	-4.27	14
	6845	179	0.77	-0.57	3.16	0.53	-0.75	2.95	0.52	-0.62	3.00	-10.38	-10.60	-7.48	-4.32	14
UNII8	6885	187	0.47	-0.68	2.94	0.25	-0.79	2.78	0.32	-0.55	2.91	-10.50	-10.12	-7.30	-4.36	14
	7005	211	0.72	-0.20	3.29	0.55	-0.24	3.18	0.60	0.07	3.35	-10.50	-10.12	-7.30	-3.95	14
	7085	227	1.71	-0.73	3.67	1.52	-0.80	3.52	1.58	-0.52	3.67	-10.50	-10.12	-7.30	-3.63	14

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	5.10	4.20	7.68	-	-	-	5.22	4.18	7.74	-10.07	-9.91	-6.98	0.76	14
	6165	43	5.29	5.19	8.25	-	-	-	5.31	5.23	8.28	-10.07	-9.91	-6.98	1.30	14
	6405	91	5.38	5.24	8.32	-	-	-	5.36	5.24	8.31	-10.07	-9.91	-6.98	1.34	14
UNII6	6445	99	5.74	4.27	8.08	-	-	-	5.76	4.26	8.09	-10.38	-10.60	-7.48	0.61	14
	6485	107	4.98	4.20	7.62	-	-	-	4.95	4.33	7.66	-10.38	-10.60	-7.48	0.18	14
	6525	115	4.73	4.29	7.52	-	-	-	4.78	4.22	7.52	-10.38	-10.60	-7.48	0.04	14
UNII7	6565	123	5.01	4.98	8.00	-	-	-	5.02	4.98	8.01	-10.38	-10.60	-7.48	0.53	14
	6685	147	5.14	4.96	8.06	-	-	-	5.05	4.85	7.96	-10.38	-10.60	-7.48	0.58	14
	6845	179	5.24	4.83	8.05	-	-	-	5.19	4.75	7.98	-10.38	-10.60	-7.48	0.57	14
UNII8	6885	187	5.15	4.75	7.96	-	-	-	5.14	4.81	7.99	-10.50	-10.12	-7.30	0.69	14
	7005	211	5.25	4.87	8.08	-	-	-	5.27	4.98	8.14	-10.50	-10.12	-7.30	0.84	14
	7085	227	4.93	4.76	7.86	-	-	-	4.90	4.82	7.87	-10.50	-10.12	-7.30	0.58	14

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	7.76	7.09	10.45	-	-	-	-10.07	-9.91	-6.98	3.47	14
	6165	43	-	-	-	8.28	7.58	10.96	-	-	-	-10.07	-9.91	-6.98	3.98	14
	6405	91	-	-	-	8.12	7.79	10.97	-	-	-	-10.07	-9.91	-6.98	3.99	14
UNII6	6445	99	-	-	-	8.19	7.12	10.70	-	-	-	-10.38	-10.60	-7.48	3.22	14
	6485	107	-	-	-	8.28	7.60	10.96	-	-	-	-10.38	-10.60	-7.48	3.48	14
	6525	115	-	-	-	8.26	7.77	11.04	-	-	-	-10.38	-10.60	-7.48	3.56	14
UNII7	6565	123	-	-	-	7.93	8.35	11.16	-	-	-	-10.38	-10.60	-7.48	3.68	14
	6685	147	-	-	-	8.14	8.16	11.16	-	-	-	-10.38	-10.60	-7.48	3.68	14
	6845	179	-	-	-	8.58	8.02	11.32	-	-	-	-10.38	-10.60	-7.48	3.84	14
UNII8	6885	187	-	-	-	8.52	8.01	11.28	-	-	-	-10.50	-10.12	-7.30	3.98	14
	7005	211	-	-	-	8.52	8.29	11.41	-	-	-	-10.50	-10.12	-7.30	4.12	14
	7085	227	-	-	-	8.10	8.03	11.08	-	-	-	-10.50	-10.12	-7.30	3.78	14

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	7.42	6.73	10.10	-	-	-	-10.07	-9.91	-6.98	3.12	14
	6165	43	-	-	-	8.00	7.33	10.69	-	-	-	-10.07	-9.91	-6.98	3.71	14
	6405	91	-	-	-	7.82	7.50	10.67	-	-	-	-10.07	-9.91	-6.98	3.69	14
UNII6	6445	99	-	-	-	7.89	6.83	10.40	-	-	-	-10.38	-10.60	-7.48	2.92	14
	6485	107	-	-	-	7.97	7.31	10.66	-	-	-	-10.38	-10.60	-7.48	3.18	14
	6525	115	-	-	-	7.94	7.47	10.73	-	-	-	-10.38	-10.60	-7.48	3.25	14
UNII7	6565	123	-	-	-	7.62	8.05	10.85	-	-	-	-10.38	-10.60	-7.48	3.37	14
	6685	147	-	-	-	7.84	7.84	10.85	-	-	-	-10.38	-10.60	-7.48	3.37	14
	6845	179	-	-	-	8.27	7.70	11.01	-	-	-	-10.38	-10.60	-7.48	3.53	14
UNII8	6885	187	-	-	-	8.21	7.72	10.98	-	-	-	-10.50	-10.12	-7.30	3.68	14
	7005	211	-	-	-	8.19	7.96	11.09	-	-	-	-10.50	-10.12	-7.30	3.79	14
	7085	227	-	-	-	7.80	7.74	10.78	-	-	-	-10.50	-10.12	-7.30	3.49	14

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-4.47	-5.82	-2.08	-4.42	-5.67	-1.99	-4.65	-5.63	-2.10	-10.07	-9.91	-6.98	-8.97	14
	6145	39	-4.42	-5.44	-1.89	-4.47	-5.69	-2.03	-4.42	-5.73	-2.01	-10.07	-9.91	-6.98	-8.87	14
	6385	87	-5.42	-5.62	-2.51	-5.52	-5.53	-2.51	-5.29	-5.61	-2.44	-10.07	-9.91	-6.98	-9.42	14
UNII6	6465	103	-5.26	-5.66	-2.45	-5.36	-5.68	-2.50	-5.26	-5.38	-2.31	-10.38	-10.60	-7.48	-9.79	14
	6545	119	-5.41	-5.88	-2.63	-5.42	-6.01	-2.70	-5.34	-5.83	-2.57	-10.38	-10.60	-7.48	-10.05	14
UNII7	6625	135	-5.41	-5.38	-2.39	-5.60	-5.59	-2.59	-5.37	-5.46	-2.40	-10.38	-10.60	-7.48	-9.87	14
	6705	151	-5.28	-5.59	-2.42	-5.58	-5.57	-2.56	-5.46	-5.61	-2.53	-10.38	-10.60	-7.48	-9.90	14
	6785	167	-5.38	-6.27	-2.79	-5.48	-6.24	-2.83	-5.25	-6.13	-2.66	-10.38	-10.60	-7.48	-10.14	14
UNII8	6865	183	-5.08	-6.08	-2.54	-5.27	-6.24	-2.72	-5.26	-6.24	-2.71	-10.50	-10.12	-7.30	-9.84	14
	6945	199	-4.75	-5.68	-2.18	-5.01	-5.87	-2.41	-5.19	-5.87	-2.51	-10.50	-10.12	-7.30	-9.48	14
	7025	215	-4.03	-6.15	-1.95	-4.24	-6.25	-2.12	-4.57	-6.32	-2.35	-10.50	-10.12	-7.30	-9.25	14

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-1.21	-2.62	1.15	-1.16	-2.50	1.23	-1.37	-2.44	1.14	-10.07	-9.91	-6.98	-5.75	14
	6145	39	-1.24	-2.37	1.24	-1.28	-2.58	1.13	-1.24	-2.62	1.13	-10.07	-9.91	-6.98	-5.74	14
	6385	87	-2.46	-2.46	0.55	-2.55	-2.37	0.55	-2.32	-2.46	0.62	-10.07	-9.91	-6.98	-6.36	14
UNII6	6465	103	-2.23	-2.48	0.66	-2.31	-2.51	0.60	-2.18	-2.21	0.82	-10.38	-10.60	-7.48	-6.66	14
	6545	119	-2.38	-2.84	0.41	-2.39	-2.96	0.34	-2.26	-2.69	0.54	-10.38	-10.60	-7.48	-6.94	14
UNII7	6625	135	-2.31	-2.33	0.69	-2.47	-2.51	0.52	-2.22	-2.34	0.73	-10.38	-10.60	-7.48	-6.75	14
	6705	151	-2.06	-2.51	0.73	-2.34	-2.49	0.60	-2.17	-2.52	0.67	-10.38	-10.60	-7.48	-6.75	14
	6785	167	-2.20	-3.06	0.40	-2.29	-3.00	0.38	-2.07	-2.92	0.54	-10.38	-10.60	-7.48	-6.94	14
UNII8	6865	183	-1.99	-2.85	0.61	-2.15	-3.06	0.43	-2.13	-3.05	0.44	-10.50	-10.12	-7.30	-6.68	14
	6945	199	-1.60	-2.52	0.97	-1.85	-2.76	0.73	-2.03	-2.75	0.64	-10.50	-10.12	-7.30	-6.32	14
	7025	215	-1.38	-3.66	0.64	-1.58	-3.77	0.47	-1.90	-3.80	0.26	-10.50	-10.12	-7.30	-6.66	14

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	1.36	-0.56	3.51	1.27	-0.91	3.32	1.25	-0.83	3.34	-10.07	-9.91	-6.98	-3.47	14
	6145	39	0.79	-0.60	3.16	0.78	-0.58	3.16	0.96	-0.61	3.26	-10.07	-9.91	-6.98	-3.72	14
	6385	87	-0.31	-0.40	2.66	-0.40	-0.39	2.62	-0.37	-0.34	2.66	-10.07	-9.91	-6.98	-4.32	14
UNII6	6465	103	-0.34	-0.23	2.73	-0.47	-0.34	2.61	-0.52	-0.22	2.64	-10.38	-10.60	-7.48	-4.75	14
	6545	119	-0.16	-0.14	2.86	-0.34	-0.27	2.71	-0.35	-0.23	2.72	-10.38	-10.60	-7.48	-4.62	14
UNII7	6625	135	0.19	-0.01	3.10	-0.06	-0.36	2.80	0.05	-0.33	2.87	-10.38	-10.60	-7.48	-4.38	14
	6705	151	0.10	-0.27	2.93	-0.27	-0.50	2.63	-0.22	-0.58	2.61	-10.38	-10.60	-7.48	-4.55	14
	6785	167	0.30	-0.76	2.82	-0.01	-0.81	2.62	0.09	-0.63	2.76	-10.38	-10.60	-7.48	-4.66	14
UNII8	6865	183	0.49	-0.91	2.85	0.07	-1.00	2.58	-0.01	-0.81	2.62	-10.50	-10.12	-7.30	-4.44	14
	6945	199	0.70	-0.47	3.17	0.28	-0.49	2.92	0.13	-0.32	2.92	-10.50	-10.12	-7.30	-4.13	14
	7025	215	0.98	-1.02	3.11	0.71	-0.79	3.03	0.52	-0.55	3.03	-10.50	-10.12	-7.30	-4.19	14

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	5.10	3.92	7.56	5.24	3.90	7.63	5.32	4.01	7.72	-10.07	-9.91	-6.98	0.74	14
	6145	39	5.21	5.13	8.18	5.19	5.14	8.18	5.36	5.27	8.33	-10.07	-9.91	-6.98	1.35	14
	6385	87	5.62	5.38	8.51	5.58	5.47	8.54	5.42	5.49	8.47	-10.07	-9.91	-6.98	1.56	14
UNII6	6465	103	5.10	3.87	7.54	5.10	3.84	7.53	5.02	3.96	7.54	-10.38	-10.60	-7.48	0.06	14
	6545	119	4.76	4.33	7.56	4.81	4.28	7.56	4.86	4.20	7.55	-10.38	-10.60	-7.48	0.08	14
UNII7	6625	135	5.03	5.04	8.05	5.07	4.96	8.03	5.15	4.75	7.96	-10.38	-10.60	-7.48	0.57	14
	6705	151	5.23	5.20	8.23	5.14	5.12	8.14	5.15	4.88	8.03	-10.38	-10.60	-7.48	0.75	14
	6785	167	5.42	4.11	7.83	5.41	4.10	7.81	5.47	4.14	7.86	-10.38	-10.60	-7.48	0.39	14
UNII8	6865	183	5.18	4.90	8.05	5.11	4.81	7.97	5.04	4.85	7.95	-10.50	-10.12	-7.30	0.76	14
	6945	199	5.52	4.88	8.22	5.48	4.83	8.17	5.34	4.85	8.11	-10.50	-10.12	-7.30	0.92	14
	7025	215	5.18	4.38	7.81	5.19	4.47	7.85	5.04	4.52	7.80	-10.50	-10.12	-7.30	0.56	14

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	7.77	6.87	10.36	-	-	-	7.97	6.93	10.49	-10.07	-9.91	-6.98	3.51	14
	6145	39	8.21	7.56	10.91	-	-	-	8.38	7.70	11.07	-10.07	-9.91	-6.98	4.09	14
	6385	87	8.35	8.18	11.28	-	-	-	8.21	8.26	11.25	-10.07	-9.91	-6.98	4.30	14
UNII6	6465	103	8.02	7.24	10.66	-	-	-	7.98	7.33	10.68	-10.38	-10.60	-7.48	3.20	14
	6545	119	8.31	7.84	11.09	-	-	-	8.41	7.74	11.10	-10.38	-10.60	-7.48	3.62	14
UNII7	6625	135	7.97	8.40	11.20	-	-	-	8.04	8.16	11.11	-10.38	-10.60	-7.48	3.72	14
	6705	151	8.23	8.26	11.26	-	-	-	8.20	8.05	11.14	-10.38	-10.60	-7.48	3.78	14
	6785	167	8.51	7.53	11.06	-	-	-	8.53	7.55	11.08	-10.38	-10.60	-7.48	3.60	14
UNII8	6865	183	8.48	8.08	11.29	-	-	-	8.41	8.09	11.26	-10.50	-10.12	-7.30	4.00	14
	6945	199	8.91	8.12	11.54	-	-	-	8.79	8.11	11.48	-10.50	-10.12	-7.30	4.24	14
	7025	215	8.49	7.89	11.21	-	-	-	8.39	7.99	11.21	-10.50	-10.12	-7.30	3.91	14

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-	-	-	11.21	10.04	13.67	-	-	-	-10.07	-9.91	-6.98	6.69	14
	6145	39	-	-	-	11.33	10.52	13.95	-	-	-	-10.07	-9.91	-6.98	6.97	14
	6385	87	-	-	-	11.33	11.06	14.21	-	-	-	-10.07	-9.91	-6.98	7.23	14
UNII6	6465	103	-	-	-	11.28	10.51	13.92	-	-	-	-10.38	-10.60	-7.48	6.44	14
	6545	119	-	-	-	11.28	10.44	13.89	-	-	-	-10.38	-10.60	-7.48	6.41	14
UNII7	6625	135	-	-	-	11.15	11.13	14.15	-	-	-	-10.38	-10.60	-7.48	6.67	14
	6705	151	-	-	-	11.45	11.45	14.46	-	-	-	-10.38	-10.60	-7.48	6.98	14
	6785	167	-	-	-	11.61	10.09	13.93	-	-	-	-10.38	-10.60	-7.48	6.45	14
UNII8	6865	183	-	-	-	11.39	11.09	14.26	-	-	-	-10.50	-10.12	-7.30	6.96	14
	6945	199	-	-	-	11.62	11.12	14.39	-	-	-	-10.50	-10.12	-7.30	7.09	14
	7025	215	-	-	-	11.33	10.73	14.05	-	-	-	-10.50	-10.12	-7.30	6.75	14

Mode : EHT80 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	10.99	9.77	13.43	-	-	-	-10.07	-9.91	-6.98	6.45	14
	6145	39	-	-	-	11.12	10.26	13.72	-	-	-	-10.07	-9.91	-6.98	6.74	14
	6385	87	-	-	-	11.12	10.82	13.98	-	-	-	-10.07	-9.91	-6.98	7.00	14
UNII6	6465	103	-	-	-	11.07	10.29	13.71	-	-	-	-10.38	-10.60	-7.48	6.23	14
	6545	119	-	-	-	11.08	10.18	13.66	-	-	-	-10.38	-10.60	-7.48	6.18	14
UNII7	6625	135	-	-	-	10.92	10.93	13.93	-	-	-	-10.38	-10.60	-7.48	6.46	14
	6705	151	-	-	-	11.22	11.20	14.22	-	-	-	-10.38	-10.60	-7.48	6.74	14
	6785	167	-	-	-	11.39	9.86	13.70	-	-	-	-10.38	-10.60	-7.48	6.23	14
UNII8	6865	183	-	-	-	11.20	10.88	14.05	-	-	-	-10.50	-10.12	-7.30	6.76	14
	6945	199	-	-	-	11.40	10.91	14.17	-	-	-	-10.50	-10.12	-7.30	6.88	14
	7025	215	-	-	-	11.12	10.50	13.83	-	-	-	-10.50	-10.12	-7.30	6.53	14

Mode : EHT160(80L) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.87	-6.56	-2.62	-4.25	-5.83	-1.96	-4.30	-5.76	-1.96	-10.07	-9.91	-6.98	-8.94	14
	6185	47	-5.29	-5.33	-2.30	-4.89	-5.17	-2.02	-4.94	-5.15	-2.03	-10.07	-9.91	-6.98	-9.00	14
	6345	79	-5.51	-5.81	-2.65	-5.32	-5.73	-2.51	-5.12	-5.84	-2.45	-10.07	-9.91	-6.98	-9.43	14
UNII6	6505	111	-5.54	-6.34	-2.91	-5.26	-6.01	-2.61	-5.20	-5.72	-2.44	-10.38	-10.60	-7.48	-9.92	14
UNII7	6665	143	-5.62	-5.78	-2.69	-5.35	-5.52	-2.42	-5.20	-5.40	-2.29	-10.38	-10.60	-7.48	-9.77	14
UNII8	6825	175	-5.51	-6.62	-3.02	-5.24	-6.17	-2.67	-5.11	-6.08	-2.56	-10.50	-10.12	-7.30	-9.85	14
	6985	207	-4.81	-6.10	-2.40	-4.62	-5.92	-2.21	-4.85	-5.90	-2.33	-10.50	-10.12	-7.30	-9.51	14

Mode : EHT160(80L) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-1.91	-3.41	0.41	-1.23	-2.78	1.07	-1.35	-2.65	1.06	-10.07	-9.91	-6.98	-5.91	14
	6185	47	-2.06	-2.28	0.84	-1.67	-2.06	1.15	-1.69	-2.16	1.09	-10.07	-9.91	-6.98	-5.83	14
	6345	79	-2.40	-2.72	0.45	-2.23	-2.68	0.56	-2.05	-2.78	0.61	-10.07	-9.91	-6.98	-6.37	14
UNII6	6505	111	-2.56	-3.24	0.12	-2.30	-2.92	0.41	-2.27	-2.69	0.54	-10.38	-10.60	-7.48	-6.94	14
UNII7	6665	143	-2.59	-2.72	0.35	-2.36	-2.51	0.58	-2.19	-2.43	0.70	-10.38	-10.60	-7.48	-6.78	14
UNII8	6825	175	-2.45	-3.45	0.09	-2.19	-3.02	0.42	-2.04	-3.02	0.51	-10.50	-10.12	-7.30	-6.79	14
	6985	207	-1.63	-3.11	0.70	-1.48	-2.95	0.86	-1.69	-2.99	0.72	-10.50	-10.12	-7.30	-6.44	14

Mode : EHT160(80L) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	0.91	-0.06	3.46	1.37	0.09	3.78	1.38	0.17	3.83	-10.07	-9.91	-6.98	-3.15	14
	6185	47	0.56	-0.11	3.25	0.93	0.23	3.61	1.08	0.19	3.67	-10.07	-9.91	-6.98	-3.31	14
	6345	79	0.40	-0.04	3.20	0.59	0.24	3.43	0.73	0.34	3.55	-10.07	-9.91	-6.98	-3.43	14
UNII6	6505	111	0.13	0.05	3.10	0.32	0.22	3.28	0.21	0.30	3.26	-10.38	-10.60	-7.48	-4.20	14
UNII7	6665	143	0.58	0.10	3.35	0.70	0.13	3.43	0.67	0.14	3.42	-10.38	-10.60	-7.48	-4.04	14
UNII8	6825	175	0.64	-0.62	3.06	0.65	-0.31	3.20	0.66	-0.16	3.28	-10.50	-10.12	-7.30	-4.01	14
	6985	207	1.14	-0.61	3.37	1.07	-0.27	3.46	0.87	-0.04	3.45	-10.50	-10.12	-7.30	-3.84	14

Mode : EHT160(80L) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	5.48	4.21	7.90	5.68	4.28	8.05	5.88	4.47	8.24	-10.07	-9.91	-6.98	1.26	14
	6185	47	5.36	5.07	8.23	5.36	5.07	8.23	5.58	5.27	8.44	-10.07	-9.91	-6.98	1.46	14
	6345	79	5.31	5.09	8.21	5.18	5.09	8.14	5.23	5.19	8.22	-10.07	-9.91	-6.98	1.24	14
UNII6	6505	111	4.93	4.32	7.64	4.91	4.25	7.60	4.85	4.39	7.64	-10.38	-10.60	-7.48	0.16	14
UNII7	6665	143	5.10	4.17	7.67	5.14	4.11	7.66	5.25	3.92	7.64	-10.38	-10.60	-7.48	0.19	14
UNII8	6825	175	5.39	4.90	8.17	5.36	4.84	8.12	5.46	4.92	8.20	-10.50	-10.12	-7.30	0.91	14
	6985	207	5.42	5.11	8.28	5.38	5.09	8.25	5.28	5.11	8.21	-10.50	-10.12	-7.30	0.98	14

Mode : EHT160(80L) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	8.11	6.89	10.56	-	-	-	8.40	7.07	10.80	-10.07	-9.91	-6.98	3.82	14
	6185	47	8.36	7.81	11.11	-	-	-	8.55	8.01	11.30	-10.07	-9.91	-6.98	4.32	14
	6345	79	8.48	8.27	11.39	-	-	-	8.42	8.34	11.39	-10.07	-9.91	-6.98	4.41	14
UNII6	6505	111	8.47	7.82	11.17	-	-	-	8.41	7.92	11.18	-10.38	-10.60	-7.48	3.70	14
UNII7	6665	143	8.20	7.52	10.88	-	-	-	8.28	7.32	10.83	-10.38	-10.60	-7.48	3.41	14
UNII8	6825	175	8.83	8.12	11.49	-	-	-	8.85	8.16	11.53	-10.50	-10.12	-7.30	4.24	14
	6985	207	8.69	8.03	11.38	-	-	-	8.59	8.02	11.32	-10.50	-10.12	-7.30	4.09	14

Mode : EHT160(80L) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	11.38	10.12	13.81	-	-	-	-10.07	-9.91	-6.98	6.83	14
	6185	47	-	-	-	11.40	10.69	14.07	-	-	-	-10.07	-9.91	-6.98	7.09	14
	6345	79	-	-	-	11.52	11.14	14.35	-	-	-	-10.07	-9.91	-6.98	7.37	14
UNII6	6505	111	-	-	-	11.41	10.53	14.00	-	-	-	-10.38	-10.60	-7.48	6.52	14
UNII7	6665	143	-	-	-	11.30	10.16	13.77	-	-	-	-10.38	-10.60	-7.48	6.29	14
UNII8	6825	175	-	-	-	11.84	11.20	14.54	-	-	-	-10.50	-10.12	-7.30	7.24	14
	6985	207	-	-	-	11.52	10.79	14.18	-	-	-	-10.50	-10.12	-7.30	6.88	14

Mode : EHT160(80U) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.37	-5.84	-2.04	-4.20	-5.79	-1.91	-4.58	-6.01	-2.22	-10.07	-9.91	-6.98	-8.89	14
	6185	47	-5.00	-5.19	-2.09	-5.03	-5.43	-2.21	-5.12	-5.68	-2.38	-10.07	-9.91	-6.98	-9.07	14
	6345	79	-5.17	-5.86	-2.49	-5.14	-5.76	-2.43	-5.29	-6.17	-2.70	-10.07	-9.91	-6.98	-9.41	14
UNII6	6505	111	-5.35	-5.79	-2.55	-5.24	-5.93	-2.56	-5.46	-5.97	-2.70	-10.38	-10.60	-7.48	-10.03	14
UNII7	6665	143	-5.24	-5.41	-2.31	-5.44	-5.50	-2.46	-5.62	-5.96	-2.78	-10.38	-10.60	-7.48	-9.79	14
UNII8	6825	175	-5.14	-6.13	-2.60	-5.26	-6.36	-2.77	-5.65	-6.73	-3.15	-10.50	-10.12	-7.30	-9.89	14
	6985	207	-4.97	-5.97	-2.43	-5.07	-6.07	-2.53	-5.66	-6.43	-3.02	-10.50	-10.12	-7.30	-9.73	14

Mode : EHT160(80U) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-1.45	-2.66	1.00	-1.22	-2.59	1.16	-1.56	-2.89	0.83	-10.07	-9.91	-6.98	-5.82	14
	6185	47	-1.77	-2.18	1.04	-1.86	-2.46	0.86	-1.93	-2.69	0.72	-10.07	-9.91	-6.98	-5.94	14
	6345	79	-2.03	-2.81	0.60	-2.06	-2.72	0.64	-2.16	-3.11	0.40	-10.07	-9.91	-6.98	-6.34	14
UNII6	6505	111	-2.33	-2.74	0.48	-2.30	-2.76	0.48	-2.47	-2.79	0.38	-10.38	-10.60	-7.48	-6.99	14
UNII7	6665	143	-2.20	-2.40	0.71	-2.41	-2.46	0.57	-2.60	-2.94	0.24	-10.38	-10.60	-7.48	-6.77	14
UNII8	6825	175	-2.06	-3.02	0.50	-2.23	-3.18	0.34	-2.55	-3.51	0.01	-10.50	-10.12	-7.30	-6.80	14
	6985	207	-1.83	-3.00	0.64	-1.97	-3.03	0.54	-2.53	-3.41	0.07	-10.50	-10.12	-7.30	-6.66	14

Mode : EHT160(80U) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.30	0.23	3.81	1.43	0.00	3.78	1.32	-0.27	3.61	-10.07	-9.91	-6.98	-3.17	14
	6185	47	1.04	0.16	3.63	1.04	0.17	3.64	1.04	0.10	3.61	-10.07	-9.91	-6.98	-3.34	14
	6345	79	0.77	0.32	3.56	0.72	0.41	3.58	0.44	0.18	3.32	-10.07	-9.91	-6.98	-3.40	14
UNII6	6505	111	0.05	0.21	3.14	0.03	-0.02	3.02	-0.28	-0.18	2.78	-10.38	-10.60	-7.48	-4.34	14
UNII7	6665	143	0.62	0.09	3.37	0.26	-0.11	3.09	-0.03	-0.44	2.78	-10.38	-10.60	-7.48	-4.11	14
UNII8	6825	175	0.65	-0.15	3.28	0.26	-0.25	3.03	-0.14	-0.35	2.77	-10.50	-10.12	-7.30	-4.02	14
	6985	207	0.85	0.07	3.49	0.61	0.35	3.49	0.18	0.26	3.23	-10.50	-10.12	-7.30	-3.80	14

Mode : EHT160(80U) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	5.69	4.56	8.17	5.82	4.59	8.26	5.96	4.63	8.36	-10.07	-9.91	-6.98	1.38	14
	6185	47	5.52	5.28	8.41	5.47	5.34	8.42	5.63	5.53	8.59	-10.07	-9.91	-6.98	1.61	14
	6345	79	5.25	5.22	8.25	5.21	5.34	8.28	5.07	5.35	8.22	-10.07	-9.91	-6.98	1.30	14
UNII6	6505	111	4.75	4.28	7.53	4.82	4.23	7.55	4.92	4.19	7.58	-10.38	-10.60	-7.48	0.11	14
UNII7	6665	143	5.22	3.90	7.62	5.14	3.83	7.54	5.17	3.63	7.48	-10.38	-10.60	-7.48	0.14	14
UNII8	6825	175	5.46	4.89	8.20	5.38	4.78	8.10	5.31	4.82	8.09	-10.50	-10.12	-7.30	0.90	14
	6985	207	5.27	5.26	8.27	5.27	5.36	8.32	5.14	5.41	8.29	-10.50	-10.12	-7.30	1.03	14

Mode : EHT160(80U) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	8.45	7.18	10.87	-	-	-	8.65	7.23	11.01	-10.07	-9.91	-6.98	4.03	14
	6185	47	8.44	8.02	11.25	-	-	-	8.53	8.19	11.37	-10.07	-9.91	-6.98	4.39	14
	6345	79	8.43	8.42	11.44	-	-	-	8.28	8.48	11.39	-10.07	-9.91	-6.98	4.46	14
UNII6	6505	111	8.32	7.79	11.07	-	-	-	8.43	7.73	11.11	-10.38	-10.60	-7.48	3.63	14
UNII7	6665	143	8.28	7.24	10.80	-	-	-	8.23	7.08	10.70	-10.38	-10.60	-7.48	3.32	14
UNII8	6825	175	8.87	8.11	11.52	-	-	-	8.77	8.08	11.45	-10.50	-10.12	-7.30	4.22	14
	6985	207	8.54	8.23	11.40	-	-	-	8.45	8.35	11.41	-10.50	-10.12	-7.30	4.11	14

Mode : EHT160(80U) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	11.66	10.35	14.07	-	-	-	-10.07	-9.91	-6.98	7.09	14
	6185	47	-	-	-	11.44	10.89	14.19	-	-	-	-10.07	-9.91	-6.98	7.21	14
	6345	79	-	-	-	11.43	11.31	14.38	-	-	-	-10.07	-9.91	-6.98	7.40	14
UNII6	6505	111	-	-	-	11.32	10.44	13.91	-	-	-	-10.38	-10.60	-7.48	6.43	14
UNII7	6665	143	-	-	-	11.28	9.93	13.67	-	-	-	-10.38	-10.60	-7.48	6.19	14
UNII8	6825	175	-	-	-	11.81	11.18	14.52	-	-	-	-10.50	-10.12	-7.30	7.22	14
	6985	207	-	-	-	11.34	11.02	14.19	-	-	-	-10.50	-10.12	-7.30	6.90	14

Mode : EHT160 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.87	9.66	13.32	-	-	-	-10.07	-9.91	-6.98	6.34	14
	6185	47	-	-	-	10.81	10.21	13.53	-	-	-	-10.07	-9.91	-6.98	6.55	14
	6345	79	-	-	-	10.87	10.63	13.76	-	-	-	-10.07	-9.91	-6.98	6.78	14
UNII6	6505	111	-	-	-	10.75	9.91	13.36	-	-	-	-10.38	-10.60	-7.48	5.88	14
UNII7	6665	143	-	-	-	10.67	9.50	13.14	-	-	-	-10.38	-10.60	-7.48	5.66	14
UNII8	6825	175	-	-	-	11.20	10.58	13.91	-	-	-	-10.50	-10.12	-7.30	6.61	14
	6985	207	-	-	-	10.83	10.33	13.60	-	-	-	-10.50	-10.12	-7.30	6.30	14

Mode: EHT160 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	11.49	10.25	13.92	-	-	-	-10.07	-9.91	-6.98	6.94	14
	6185	47	-	-	-	11.40	10.81	14.13	-	-	-	-10.07	-9.91	-6.98	7.15	14
	6345	79	-	-	-	11.46	11.24	14.37	-	-	-	-10.07	-9.91	-6.98	7.39	14
UNII6	6505	111	-	-	-	11.35	10.51	13.96	-	-	-	-10.38	-10.60	-7.48	6.48	14
UNII7	6665	143	-	-	-	11.28	10.07	13.73	-	-	-	-10.38	-10.60	-7.48	6.25	14
UNII8	6825	175	-	-	-	11.82	11.19	14.53	-	-	-	-10.50	-10.12	-7.30	7.23	14
	6985	207	-	-	-	11.44	10.94	14.21	-	-	-	-10.50	-10.12	-7.30	6.91	14

Mode : EHT320(80LL) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-6.63	-7.69	-4.12	-5.83	-7.01	-3.37	-5.76	-6.66	-3.18	-10.07	-9.91	-6.98	-10.16	14
	6265	63	-6.57	-6.40	-3.48	-6.25	-6.07	-3.15	-6.04	-5.89	-2.96	-10.07	-9.91	-6.98	-9.94	14
UNII6	6425	95	-6.42	-6.47	-3.43	-6.27	-6.29	-3.27	-5.91	-6.26	-3.07	-10.38	-10.60	-7.48	-10.55	14
	6585	127	-6.63	-7.44	-4.01	-6.43	-7.13	-3.75	-6.18	-6.65	-3.40	-10.38	-10.60	-7.48	-10.88	14
UNII8	6745	159	-6.70	-7.79	-4.20	-6.34	-7.34	-3.80	-5.97	-6.87	-3.38	-10.50	-10.12	-7.30	-10.68	14
	6905	191	-6.09	-7.25	-3.62	-5.78	-6.86	-3.28	-5.44	-6.60	-2.97	-10.50	-10.12	-7.30	-10.27	14

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-3.56	-4.68	-1.08	-2.83	-3.98	-0.36	-2.73	-3.70	-0.18	-10.07	-9.91	-6.98	-7.16	14
	6265	63	-3.58	-3.26	-0.40	-3.14	-3.00	-0.06	-2.97	-2.85	0.10	-10.07	-9.91	-6.98	-6.88	14
UNII6	6425	95	-2.97	-2.94	0.05	-2.84	-2.79	0.19	-2.55	-2.74	0.37	-10.38	-10.60	-7.48	-7.11	14
	6585	127	-3.28	-4.06	-0.64	-2.97	-3.72	-0.32	-2.75	-3.31	-0.01	-10.38	-10.60	-7.48	-7.49	14
UNII8	6745	159	-3.26	-4.26	-0.72	-2.94	-3.87	-0.37	-2.58	-3.44	0.02	-10.50	-10.12	-7.30	-7.27	14
	6905	191	-3.11	-4.31	-0.66	-2.81	-3.82	-0.28	-2.45	-3.63	0.01	-10.50	-10.12	-7.30	-7.29	14

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-0.75	-1.31	1.99	-0.19	-1.16	2.36	-0.03	-0.97	2.54	-10.07	-9.91	-6.98	-4.44	14
	6265	63	-0.71	-0.88	2.21	-0.30	-0.45	2.64	-0.02	-0.35	2.83	-10.07	-9.91	-6.98	-4.15	14
UNII6	6425	95	-0.48	-0.72	2.41	-0.31	-0.38	2.66	-0.13	-0.16	2.87	-10.38	-10.60	-7.48	-4.61	14
	6585	127	-0.26	-0.59	2.59	0.00	-0.40	2.82	0.00	-0.22	2.90	-10.38	-10.60	-7.48	-4.58	14
UNII8	6745	159	-0.12	-1.24	2.37	0.10	-1.08	2.56	0.33	-0.96	2.74	-10.50	-10.12	-7.30	-4.56	14
	6905	191	0.04	-1.48	2.36	0.11	-1.14	2.54	0.29	-0.87	2.76	-10.50	-10.12	-7.30	-4.54	14

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.15	5.14	8.15	5.33	5.12	8.23	5.51	5.32	8.43	-10.07	-9.91	-6.98	1.45	14
	6265	63	5.49	4.14	7.88	5.48	4.16	7.88	5.68	4.32	8.07	-10.07	-9.91	-6.98	1.09	14
UNII6	6425	95	5.97	4.19	8.18	5.82	4.20	8.09	5.87	4.31	8.17	-10.38	-10.60	-7.48	0.70	14
	6585	127	5.25	5.24	8.25	5.22	5.20	8.22	5.13	5.29	8.22	-10.38	-10.60	-7.48	0.77	14
UNII8	6745	159	5.38	5.22	8.31	5.40	5.17	8.30	5.50	5.01	8.27	-10.50	-10.12	-7.30	1.01	14
	6905	191	5.50	5.01	8.27	5.45	4.97	8.23	5.53	5.06	8.31	-10.50	-10.12	-7.30	1.01	14

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	7.66	7.30	10.50	-	-	-	7.91	7.44	10.69	-10.07	-9.91	-6.98	3.71	14
	6265	63	8.40	7.51	10.98	-	-	-	8.56	7.66	11.14	-10.07	-9.91	-6.98	4.16	14
UNII6	6425	95	8.54	6.78	10.75	-	-	-	8.48	6.82	10.74	-10.38	-10.60	-7.48	3.28	14
	6585	127	8.15	8.62	11.40	-	-	-	8.06	8.65	11.37	-10.38	-10.60	-7.48	3.92	14
UNII8	6745	159	8.39	8.75	11.58	-	-	-	8.45	8.54	11.50	-10.50	-10.12	-7.30	4.29	14
	6905	191	8.71	8.25	11.49	-	-	-	8.72	8.23	11.49	-10.50	-10.12	-7.30	4.19	14

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	10.90	10.19	13.57	-	-	-	-10.07	-9.91	-6.98	6.59	14
	6265	63	-	-	-	11.74	10.54	14.19	-	-	-	-10.07	-9.91	-6.98	7.21	14
UNII6	6425	95	-	-	-	11.75	10.15	14.04	-	-	-	-10.38	-10.60	-7.48	6.56	14
	6585	127	-	-	-	11.21	11.44	14.33	-	-	-	-10.38	-10.60	-7.48	6.86	14
UNII8	6745	159	-	-	-	11.56	11.11	14.35	-	-	-	-10.50	-10.12	-7.30	7.06	14
	6905	191	-	-	-	11.64	11.26	14.46	-	-	-	-10.50	-10.12	-7.30	7.17	14

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-5.64	-6.60	-3.08	-4.58	-5.71	-2.10	-4.04	-5.08	-1.52	-10.07	-9.91	-6.98	-8.50	14
	6265	63	-5.99	-5.86	-2.92	-5.21	-5.31	-2.25	-4.35	-4.57	-1.45	-10.07	-9.91	-6.98	-8.43	14
UNII6	6425	95	-5.88	-6.20	-3.03	-5.15	-5.22	-2.17	-4.45	-4.67	-1.55	-10.38	-10.60	-7.48	-9.03	14
	6585	127	-6.16	-6.71	-3.41	-5.17	-5.89	-2.50	-4.45	-4.98	-1.70	-10.38	-10.60	-7.48	-9.17	14
UNII8	6745	159	-5.90	-6.78	-3.31	-5.23	-5.83	-2.51	-4.50	-5.25	-1.85	-10.50	-10.12	-7.30	-9.14	14
	6905	191	-5.32	-6.54	-2.88	-4.66	-5.84	-2.20	-4.13	-5.27	-1.65	-10.50	-10.12	-7.30	-8.95	14

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-2.64	-3.63	-0.10	-1.56	-2.67	0.93	-1.03	-2.09	1.48	-10.07	-9.91	-6.98	-5.50	14
	6265	63	-2.85	-2.77	0.20	-2.06	-2.17	0.89	-1.26	-1.48	1.64	-10.07	-9.91	-6.98	-5.34	14
UNII6	6425	95	-2.43	-2.65	0.47	-1.72	-1.65	1.33	-1.03	-1.10	1.94	-10.38	-10.60	-7.48	-5.53	14
	6585	127	-2.65	-3.23	0.08	-1.73	-2.47	0.92	-1.02	-1.53	1.74	-10.38	-10.60	-7.48	-5.73	14
UNII8	6745	159	-2.42	-3.21	0.21	-1.76	-2.29	0.99	-1.03	-1.69	1.66	-10.50	-10.12	-7.30	-5.63	14
	6905	191	-2.33	-3.51	0.13	-1.60	-2.80	0.85	-1.06	-2.22	1.41	-10.50	-10.12	-7.30	-5.89	14

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.13	-0.72	2.74	1.11	-0.09	3.56	1.79	0.48	4.20	-10.07	-9.91	-6.98	-2.78	14
	6265	63	0.14	-0.20	2.98	1.05	0.73	3.91	1.84	1.49	4.68	-10.07	-9.91	-6.98	-2.30	14
UNII6	6425	95	0.06	0.01	3.05	0.82	0.93	3.89	1.27	1.49	4.40	-10.38	-10.60	-7.48	-3.08	14
	6585	127	0.05	-0.12	2.98	0.89	0.58	3.75	1.42	1.15	4.30	-10.38	-10.60	-7.48	-3.18	14
UNII8	6745	159	0.41	-0.58	2.95	1.01	0.06	3.57	1.55	0.50	4.07	-10.50	-10.12	-7.30	-3.23	14
	6905	191	0.34	-0.72	2.86	0.82	0.07	3.47	1.25	0.81	4.05	-10.50	-10.12	-7.30	-3.25	14

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.47	5.40	8.45	5.60	5.47	8.55	5.73	5.48	8.62	-10.07	-9.91	-6.98	1.64	14
	6265	63	5.62	4.34	8.04	5.57	4.37	8.02	5.71	4.58	8.19	-10.07	-9.91	-6.98	1.21	14
UNII6	6425	95	5.96	4.33	8.23	5.90	4.39	8.22	5.72	4.43	8.14	-10.38	-10.60	-7.48	0.75	14
	6585	127	5.00	5.17	8.09	5.03	5.09	8.07	5.13	5.08	8.12	-10.38	-10.60	-7.48	0.64	14
UNII8	6745	159	5.47	4.97	8.24	5.39	4.89	8.16	5.39	4.68	8.06	-10.50	-10.12	-7.30	0.94	14
	6905	191	5.53	5.01	8.29	5.44	4.87	8.18	5.34	4.93	8.15	-10.50	-10.12	-7.30	0.99	14

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	7.96	7.60	10.79	-	-	-	8.15	7.63	10.91	-10.07	-9.91	-6.98	3.93	14
	6265	63	8.49	7.72	11.13	-	-	-	8.58	7.88	11.25	-10.07	-9.91	-6.98	4.28	14
UNII6	6425	95	8.49	6.91	10.78	-	-	-	8.32	6.95	10.70	-10.38	-10.60	-7.48	3.30	14
	6585	127	7.92	8.52	11.24	-	-	-	8.04	8.47	11.27	-10.38	-10.60	-7.48	3.79	14
UNII8	6745	159	8.41	8.48	11.46	-	-	-	8.39	8.28	11.34	-10.50	-10.12	-7.30	4.16	14
	6905	191	8.72	8.18	11.47	-	-	-	8.61	8.17	11.41	-10.50	-10.12	-7.30	4.17	14

Mode : EHT320(80LM) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	11.15	10.42	13.81	-	-	-	-10.07	-9.91	-6.98	6.83	14
	6265	63	-	-	-	11.78	10.74	14.30	-	-	-	-10.07	-9.91	-6.98	7.32	14
UNII6	6425	95	-	-	-	11.64	10.27	14.02	-	-	-	-10.38	-10.60	-7.48	6.54	14
	6585	127	-	-	-	11.18	11.38	14.29	-	-	-	-10.38	-10.60	-7.48	6.81	14
UNII8	6745	159	-	-	-	11.57	10.89	14.26	-	-	-	-10.50	-10.12	-7.30	6.96	14
	6905	191	-	-	-	11.60	11.21	14.42	-	-	-	-10.50	-10.12	-7.30	7.12	14

Mode: EHT320(80MH) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-4.10	-5.13	-1.58	-4.72	-6.01	-2.31	-5.52	-6.85	-3.13	-10.07	-9.91	-6.98	-8.56	14
	6265	63	-4.41	-4.61	-1.50	-5.29	-5.65	-2.45	-5.84	-6.56	-3.18	-10.07	-9.91	-6.98	-8.48	14
UNII6	6425	95	-4.43	-4.69	-1.55	-5.28	-5.51	-2.38	-6.06	-6.12	-3.08	-10.38	-10.60	-7.48	-9.03	14
	6585	127	-4.49	-4.86	-1.66	-5.29	-5.86	-2.55	-5.91	-6.51	-3.19	-10.38	-10.60	-7.48	-9.14	14
UNII8	6745	159	-4.51	-5.23	-1.84	-5.29	-5.94	-2.59	-5.97	-6.68	-3.30	-10.50	-10.12	-7.30	-9.14	14
	6905	191	-4.11	-5.22	-1.62	-5.16	-6.22	-2.65	-6.19	-7.08	-3.60	-10.50	-10.12	-7.30	-8.92	14

Mode: EHT320(80MH) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-1.07	-2.08	1.46	-1.71	-3.03	0.69	-2.48	-3.87	-0.11	-10.07	-9.91	-6.98	-5.51	14
	6265	63	-1.28	-1.49	1.63	-2.20	-2.55	0.64	-2.76	-3.48	-0.09	-10.07	-9.91	-6.98	-5.35	14
UNII6	6425	95	-1.02	-1.12	1.94	-1.88	-1.92	1.11	-2.58	-2.49	0.48	-10.38	-10.60	-7.48	-5.54	14
	6585	127	-1.02	-1.52	1.75	-1.84	-2.42	0.89	-2.46	-3.12	0.23	-10.38	-10.60	-7.48	-5.73	14
UNII8	6745	159	-1.03	-1.69	1.66	-1.88	-2.39	0.88	-2.52	-3.14	0.19	-10.50	-10.12	-7.30	-5.63	14
	6905	191	-1.08	-2.21	1.40	-2.10	-3.22	0.39	-3.09	-4.02	-0.52	-10.50	-10.12	-7.30	-5.90	14

Mode : EHT320(80MH) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	1.75	0.58	4.22	1.04	-0.21	3.47	0.56	-0.84	2.92	-10.07	-9.91	-6.98	-2.76	14
	6265	63	1.81	1.47	4.65	0.99	0.63	3.83	0.44	0.02	3.24	-10.07	-9.91	-6.98	-2.33	14
UNII6	6425	95	1.28	1.47	4.38	0.35	0.52	3.45	-0.45	-0.09	2.74	-10.38	-10.60	-7.48	-3.10	14
	6585	127	1.31	1.18	4.26	0.39	0.13	3.27	-0.21	-0.55	2.64	-10.38	-10.60	-7.48	-3.22	14
UNII8	6745	159	1.47	0.36	3.96	0.46	-0.37	3.07	-0.17	-0.89	2.50	-10.50	-10.12	-7.30	-3.34	14
	6905	191	1.13	0.86	4.01	0.02	0.07	3.06	-0.86	-0.50	2.33	-10.50	-10.12	-7.30	-3.29	14

Mode : EHT320(80MH) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.67	5.51	8.60	5.67	5.55	8.62	5.88	5.71	8.81	-10.07	-9.91	-6.98	1.83	14
	6265	63	5.73	4.68	8.25	5.59	4.68	8.17	5.63	4.76	8.23	-10.07	-9.91	-6.98	1.27	14
UNII6	6425	95	5.88	4.36	8.20	5.87	4.33	8.18	5.80	4.43	8.18	-10.38	-10.60	-7.48	0.72	14
	6585	127	5.14	5.08	8.12	5.18	5.02	8.11	5.30	4.84	8.09	-10.38	-10.60	-7.48	0.65	14
UNII8	6745	159	5.44	4.61	8.06	5.40	4.55	8.01	5.49	4.65	8.10	-10.50	-10.12	-7.30	0.81	14
	6905	191	5.33	4.97	8.16	5.28	4.93	8.12	5.15	4.93	8.05	-10.50	-10.12	-7.30	0.87	14

Mode : EHT320(80MH) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.07	7.66	10.88	-	-	-	8.24	7.82	11.05	-10.07	-9.91	-6.98	4.07	14
	6265	63	8.52	8.00	11.27	-	-	-	8.47	8.05	11.27	-10.07	-9.91	-6.98	4.30	14
UNII6	6425	95	8.33	6.89	10.68	-	-	-	8.24	6.91	10.63	-10.38	-10.60	-7.48	3.20	14
	6585	127	8.07	8.45	11.27	-	-	-	8.12	8.24	11.19	-10.38	-10.60	-7.48	3.80	14
UNII8	6745	159	8.41	8.14	11.29	-	-	-	8.43	8.15	11.31	-10.50	-10.12	-7.30	4.01	14
	6905	191	8.56	8.18	11.39	-	-	-	8.42	8.14	11.29	-10.50	-10.12	-7.30	4.09	14

Mode : EHT320(80MH) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	11.25	10.53	13.91	-	-	-	-10.07	-9.91	-6.98	6.93	14
	6265	63	-	-	-	11.74	11.00	14.40	-	-	-	-10.07	-9.91	-6.98	7.42	14
UNII6	6425	95	-	-	-	11.52	10.23	13.93	-	-	-	-10.38	-10.60	-7.48	6.45	14
	6585	127	-	-	-	11.27	11.22	14.25	-	-	-	-10.38	-10.60	-7.48	6.77	14
UNII8	6745	159	-	-	-	11.57	10.67	14.15	-	-	-	-10.50	-10.12	-7.30	6.86	14
	6905	191	-	-	-	11.42	11.23	14.34	-	-	-	-10.50	-10.12	-7.30	7.04	14

Mode : EHT320(80HH) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-5.61	-6.99	-3.24	-5.87	-7.40	-3.56	-5.98	-7.61	-3.71	-10.07	-9.91	-6.98	-10.21	14
	6265	63	-5.85	-6.57	-3.18	-6.04	-6.67	-3.33	-6.20	-7.03	-3.58	-10.07	-9.91	-6.98	-10.16	14
UNII6	6425	95	-6.01	-6.11	-3.05	-6.21	-6.44	-3.31	-6.39	-6.51	-3.44	-10.38	-10.60	-7.48	-10.53	14
	6585	127	-5.95	-6.63	-3.27	-6.29	-6.98	-3.61	-6.52	-7.38	-3.92	-10.38	-10.60	-7.48	-10.75	14
UNII8	6745	159	-5.97	-6.85	-3.38	-6.34	-7.26	-3.76	-6.73	-7.62	-4.14	-10.50	-10.12	-7.30	-10.68	14
	6905	191	-6.21	-7.15	-3.64	-6.53	-7.46	-3.96	-7.12	-7.87	-4.47	-10.50	-10.12	-7.30	-10.94	14

Mode : EHT320(80HH) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-2.60	-4.02	-0.24	-2.88	-4.52	-0.61	-2.96	-4.76	-0.75	-10.07	-9.91	-6.98	-7.22	14
	6265	63	-2.83	-3.45	-0.12	-3.04	-3.60	-0.30	-3.15	-4.01	-0.55	-10.07	-9.91	-6.98	-7.10	14
UNII6	6425	95	-2.71	-2.65	0.33	-2.82	-2.92	0.14	-2.99	-3.03	0.00	-10.38	-10.60	-7.48	-7.15	14
	6585	127	-2.50	-3.18	0.18	-2.90	-3.53	-0.19	-3.07	-4.02	-0.51	-10.38	-10.60	-7.48	-7.29	14
UNII8	6745	159	-2.49	-3.29	0.14	-2.86	-3.76	-0.28	-3.19	-4.15	-0.63	-10.50	-10.12	-7.30	-7.16	14
	6905	191	-3.19	-4.23	-0.67	-3.53	-4.52	-0.99	-4.12	-4.84	-1.45	-10.50	-10.12	-7.30	-7.97	14

Mode : EHT320(80HH) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.41	-0.99	2.78	0.25	-1.18	2.60	0.26	-1.32	2.56	-10.07	-9.91	-6.98	-4.20	14
	6265	63	0.33	-0.09	3.13	0.10	-0.29	2.92	-0.16	-0.56	2.65	-10.07	-9.91	-6.98	-3.84	14
UNII6	6425	95	-0.63	-0.36	2.52	-0.84	-0.77	2.20	-1.11	-0.97	1.97	-10.38	-10.60	-7.48	-4.96	14
	6585	127	-0.34	-0.76	2.46	-0.88	-1.04	2.05	-1.14	-1.48	1.71	-10.38	-10.60	-7.48	-5.02	14
UNII8	6745	159	-0.34	-1.09	2.31	-0.93	-1.40	1.85	-1.30	-1.52	1.60	-10.50	-10.12	-7.30	-4.99	14
	6905	191	-1.04	-0.68	2.16	-1.46	-0.73	1.93	-1.92	-0.98	1.58	-10.50	-10.12	-7.30	-5.14	14

Mode : EHT320(80HH) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.81	5.69	8.76	5.77	5.73	8.76	5.93	5.95	8.95	-10.07	-9.91	-6.98	1.97	14
	6265	63	5.65	4.78	8.25	5.61	4.89	8.28	5.45	4.85	8.17	-10.07	-9.91	-6.98	1.30	14
UNII6	6425	95	5.71	4.30	8.07	5.78	4.21	8.08	5.85	4.19	8.11	-10.38	-10.60	-7.48	0.63	14
	6585	127	5.27	4.80	8.05	5.21	4.75	7.99	5.24	4.51	7.90	-10.38	-10.60	-7.48	0.57	14
UNII8	6745	159	5.50	4.60	8.08	5.43	4.47	7.99	5.33	4.49	7.94	-10.50	-10.12	-7.30	0.79	14
	6905	191	5.10	4.99	8.05	5.12	5.11	8.13	5.00	5.20	8.11	-10.50	-10.12	-7.30	0.83	14

Mode : EHT320(80HH) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.17	7.83	11.01	-	-	-	8.24	8.02	11.14	-10.07	-9.91	-6.98	4.16	14
	6265	63	8.51	8.14	11.34	-	-	-	8.34	8.19	11.28	-10.07	-9.91	-6.98	4.36	14
UNII6	6425	95	8.16	6.79	10.54	-	-	-	8.27	6.70	10.57	-10.38	-10.60	-7.48	3.09	14
	6585	127	8.14	8.15	11.16	-	-	-	8.09	7.98	11.05	-10.38	-10.60	-7.48	3.68	14
UNII8	6745	159	8.46	8.08	11.29	-	-	-	8.35	8.06	11.22	-10.50	-10.12	-7.30	3.99	14
	6905	191	8.39	8.27	11.34	-	-	-	8.30	8.39	11.35	-10.50	-10.12	-7.30	4.06	14

Mode : EHT320(80HH) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	11.32	10.73	14.05	-	-	-	-10.07	-9.91	-6.98	7.07	14
	6265	63	-	-	-	11.67	11.12	14.41	-	-	-	-10.07	-9.91	-6.98	7.43	14
UNII6	6425	95	-	-	-	11.44	10.04	13.81	-	-	-	-10.38	-10.60	-7.48	6.33	14
	6585	127	-	-	-	11.29	10.96	14.14	-	-	-	-10.38	-10.60	-7.48	6.66	14
UNII8	6745	159	-	-	-	11.56	10.58	14.11	-	-	-	-10.50	-10.12	-7.30	6.81	14
	6905	191	-	-	-	11.28	11.41	14.35	-	-	-	-10.50	-10.12	-7.30	7.06	14

Mode : EHT320(160L) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	10.58	9.61	13.13	-	-	-	-10.07	-9.91	-6.98	6.16	14
	6265	63	-	-	-	10.51	9.68	13.13	-	-	-	-10.07	-9.91	-6.98	6.15	14
UNII6	6425	95	-	-	-	10.45	9.22	12.89	-	-	-	-10.38	-10.60	-7.48	5.41	14
	6585	127	-	-	-	9.99	10.58	13.31	-	-	-	-10.38	-10.60	-7.48	5.83	14
UNII8	6745	159	-	-	-	10.46	10.15	13.32	-	-	-	-10.50	-10.12	-7.30	6.02	14
	6905	191	-	-	-	10.83	10.14	13.51	-	-	-	-10.50	-10.12	-7.30	6.21	14

Mode : EHT320(160U) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	10.86	9.95	13.44	-	-	-	-10.07	-9.91	-6.98	6.46	14
	6265	63	-	-	-	10.45	10.06	13.27	-	-	-	-10.07	-9.91	-6.98	6.29	14
UNII6	6425	95	-	-	-	10.23	9.15	12.73	-	-	-	-10.38	-10.60	-7.48	5.26	14
	6585	127	-	-	-	10.03	10.25	13.15	-	-	-	-10.38	-10.60	-7.48	5.67	14
UNII8	6745	159	-	-	-	10.44	9.78	13.14	-	-	-	-10.50	-10.12	-7.30	5.84	14
	6905	191	-	-	-	10.55	10.20	13.39	-	-	-	-10.50	-10.12	-7.30	6.09	14

Mode : EHT320 4x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	10.16	9.35	12.78	-	-	-	-10.07	-9.91	-6.98	5.80	14
	6265	63	-	-	-	10.52	9.80	13.19	-	-	-	-10.07	-9.91	-6.98	6.21	14
UNII6	6425	95	-	-	-	10.35	9.10	12.78	-	-	-	-10.38	-10.60	-7.48	5.30	14
	6585	127	-	-	-	10.05	10.35	13.21	-	-	-	-10.38	-10.60	-7.48	5.73	14
UNII8	6745	159	-	-	-	10.48	9.89	13.21	-	-	-	-10.50	-10.12	-7.30	5.91	14
	6905	191	-	-	-	10.73	10.09	13.43	-	-	-	-10.50	-10.12	-7.30	6.14	14

Mode : EHT320 SU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	10.59	9.86	13.25	-	-	-	-10.07	-9.91	-6.98	6.27	14
	6265	63	-	-	-	10.92	10.31	13.64	-	-	-	-10.07	-9.91	-6.98	6.66	14
UNII6	6425	95	-	-	-	10.79	9.63	13.26	-	-	-	-10.38	-10.60	-7.48	5.78	14
	6585	127	-	-	-	10.47	10.87	13.68	-	-	-	-10.38	-10.60	-7.48	6.21	14
UNII8	6745	159	-	-	-	10.92	10.41	13.68	-	-	-	-10.50	-10.12	-7.30	6.38	14
	6905	191	-	-	-	11.17	10.61	13.91	-	-	-	-10.50	-10.12	-7.30	6.62	14

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	4.71	4.43	7.58	-	-	-	-10.07	-9.91	-6.98	0.60	14
	6175	45	-	-	-	5.23	4.95	8.10	-	-	-	-10.07	-9.91	-6.98	1.12	14
	6415	93	-	-	-	5.31	5.00	8.17	-	-	-	-10.07	-9.91	-6.98	1.19	14
UNII6	6435	97	-	-	-	5.48	3.91	7.78	-	-	-	-10.38	-10.60	-7.48	0.30	14
	6475	105	-	-	-	5.32	4.32	7.86	-	-	-	-10.38	-10.60	-7.48	0.38	14
	6515	113	-	-	-	4.97	4.70	7.85	-	-	-	-10.38	-10.60	-7.48	0.37	14
UNII7	6535	117	-	-	-	5.01	4.63	7.83	-	-	-	-10.38	-10.60	-7.48	0.35	14
	6695	149	-	-	-	5.29	4.95	8.14	-	-	-	-10.38	-10.60	-7.48	0.66	14
	6855	181	-	-	-	5.43	4.80	8.14	-	-	-	-10.38	-10.60	-7.48	0.66	14
UNII8	6875	185	-	-	-	5.23	4.81	8.04	-	-	-	-10.50	-10.12	-7.30	0.74	14
	6995	209	-	-	-	5.50	5.22	8.37	-	-	-	-10.50	-10.12	-7.30	1.08	14
	7115	233	-	-	-	5.32	4.66	8.02	-	-	-	-10.50	-10.12	-7.30	0.72	14

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	-1.44	-3.25	0.76	-1.61	-3.27	0.65	-1.55	-3.11	0.75	-10.07	-9.91	-6.98	-6.22	14
	6175	45	-2.03	-2.59	0.71	-2.14	-2.69	0.60	-2.07	-2.58	0.69	-10.07	-9.91	-6.98	-6.27	14
UNII6	6415	93	-2.29	-2.38	0.68	-2.42	-2.51	0.54	-2.26	-2.50	0.63	-10.07	-9.91	-6.98	-6.30	14
	6435	97	-2.15	-2.38	0.75	-2.28	-2.57	0.59	-2.13	-2.48	0.71	-10.38	-10.60	-7.48	-6.73	14
	6475	105	-2.25	-2.82	0.48	-2.35	-2.90	0.39	-2.20	-2.70	0.57	-10.38	-10.60	-7.48	-6.91	14
	6515	113	-2.17	-2.69	0.59	-2.29	-2.82	0.46	-2.19	-2.74	0.55	-10.38	-10.60	-7.48	-6.89	14
	6535	117	-2.25	-2.90	0.44	-2.35	-3.02	0.34	-2.20	-2.89	0.48	-10.38	-10.60	-7.48	-7.00	14
UNII7	6695	149	-2.17	-2.63	0.62	-2.32	-2.74	0.49	-2.24	-2.64	0.58	-10.38	-10.60	-7.48	-6.86	14
	6855	181	-1.85	-2.98	0.63	-1.97	-3.10	0.51	-1.88	-2.98	0.62	-10.38	-10.60	-7.48	-6.85	14
UNII8	6875	185	-1.89	-3.03	0.59	-2.01	-3.13	0.47	-1.92	-3.02	0.57	-10.50	-10.12	-7.30	-6.71	14
	6995	209	-1.92	-3.37	0.42	-2.02	-3.47	0.32	-1.91	-3.36	0.44	-10.50	-10.12	-7.30	-6.86	14
	7115	233	-1.10	-4.53	0.53	-1.22	-4.63	0.41	-1.12	-4.49	0.52	-10.50	-10.12	-7.30	-6.77	14

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	1.46	-0.53	3.59	-	-	-	1.45	-0.56	3.57	-10.07	-9.91	-6.98	-3.39	14
	6175	45	0.56	-0.38	3.12	-	-	-	0.59	-0.40	3.14	-10.07	-9.91	-6.98	-3.84	14
UNII6	6415	93	-0.33	-0.39	2.65	-	-	-	-0.33	-0.40	2.65	-10.07	-9.91	-6.98	-4.33	14
	6435	97	-0.31	-0.20	2.76	-	-	-	-0.31	-0.21	2.75	-10.38	-10.60	-7.48	-4.72	14
	6475	105	-0.17	-0.29	2.78	-	-	-	-0.18	-0.24	2.80	-10.38	-10.60	-7.48	-4.68	14
	6515	113	-0.36	-0.36	2.65	-	-	-	-0.42	-0.41	2.59	-10.38	-10.60	-7.48	-4.83	14
	6535	117	-0.22	-0.07	2.87	-	-	-	-0.15	-0.19	2.84	-10.38	-10.60	-7.48	-4.61	14
UNII7	6695	149	0.26	-0.31	2.99	-	-	-	0.17	-0.40	2.91	-10.38	-10.60	-7.48	-4.49	14
	6855	181	0.39	-0.96	2.78	-	-	-	0.33	-0.95	2.75	-10.38	-10.60	-7.48	-4.70	14
UNII8	6875	185	0.25	-0.97	2.69	-	-	-	0.20	-0.94	2.68	-10.50	-10.12	-7.30	-4.60	14
	6995	209	0.59	-0.46	3.10	-	-	-	0.59	-0.35	3.16	-10.50	-10.12	-7.30	-4.14	14
	7115	233	1.38	-0.83	3.43	-	-	-	1.38	-0.72	3.47	-10.50	-10.12	-7.30	-3.83	14

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	-1.39	-3.11	0.84	-1.60	-3.15	0.70	-1.33	-2.87	0.98	-10.07	-9.91	-6.98	-6.00	14
	6165	43	-1.36	-1.86	1.41	-1.48	-2.02	1.27	-1.41	-1.94	1.34	-10.07	-9.91	-6.98	-5.57	14
	6405	91	-2.18	-2.18	0.83	-2.31	-2.34	0.69	-2.03	-2.28	0.86	-10.07	-9.91	-6.98	-6.12	14
UNII6	6445	99	-1.93	-2.26	0.92	-2.05	-2.42	0.78	-1.93	-2.26	0.92	-10.38	-10.60	-7.48	-6.56	14
	6485	107	-2.02	-2.60	0.71	-2.11	-2.63	0.65	-1.96	-2.37	0.85	-10.38	-10.60	-7.48	-6.63	14
	6525	115	-1.94	-2.48	0.81	-2.11	-2.67	0.63	-1.92	-2.55	0.78	-10.38	-10.60	-7.48	-6.67	14
UNII7	6565	123	-1.95	-2.71	0.70	-2.07	-2.79	0.59	-1.92	-2.53	0.80	-10.38	-10.60	-7.48	-6.68	14
	6685	147	-1.75	-2.22	1.03	-1.92	-2.31	0.90	-1.91	-2.16	0.98	-10.38	-10.60	-7.48	-6.45	14
	6845	179	-1.65	-2.59	0.91	-1.79	-2.78	0.75	-1.73	-2.72	0.81	-10.38	-10.60	-7.48	-6.57	14
UNII8	6885	187	-1.74	-2.80	0.77	-1.91	-2.94	0.62	-1.78	-2.83	0.73	-10.50	-10.12	-7.30	-6.53	14
	7005	211	-1.26	-2.71	1.09	-1.41	-2.84	0.94	-1.32	-2.74	1.04	-10.50	-10.12	-7.30	-6.21	14
	7085	227	-1.29	-4.63	0.37	-1.48	-4.78	0.19	-1.43	-4.67	0.26	-10.50	-10.12	-7.30	-6.93	14

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]	
UNII5	5965	3	1.52	-0.44	3.66	1.38	-0.69	3.48	1.47	-0.62	3.56	-10.07	-9.91	-6.98	-3.32	14
	6165	43	0.64	-0.09	3.30	0.57	-0.24	3.19	0.75	-0.22	3.30	-10.07	-9.91	-6.98	-3.68	14
	6405	91	-0.12	-0.20	2.85	-0.28	-0.33	2.71	-0.17	-0.23	2.81	-10.07	-9.91	-6.98	-4.13	14
UNII6	6445	99	-0.15	-0.05	2.91	-0.25	-0.17	2.80	-0.14	-0.10	2.89	-10.38	-10.60	-7.48	-4.57	14
	6485	107	-0.02	-0.15	2.93	-0.10	-0.21	2.85	-0.09	-0.07	2.93	-10.38	-10.60	-7.48	-4.55	14
	6525	115	-0.17	-0.20	2.83	-0.33	-0.37	2.66	-0.20	-0.30	2.76	-10.38	-10.60	-7.48	-4.65	14
UNII7	6565	123	0.10	-0.09	3.02	-0.02	-0.20	2.90	0.01	-0.07	2.98	-10.38	-10.60	-7.48	-4.46	14
	6685	147	0.40	0.00	3.21	0.20	-0.14	3.05	0.14	-0.12	3.02	-10.38	-10.60	-7.48	-4.26	14
	6845	179	0.79	-0.60	3.16	0.61	-0.74	3.00	0.55	-0.65	3.00	-10.38	-10.60	-7.48	-4.32	14
UNII8	6885	187	0.48	-0.71	2.94	0.32	-0.78	2.82	0.36	-0.57	2.93	-10.50	-10.12	-7.30	-4.36	14
	7005	211	0.74	-0.23	3.30	0.63	-0.23	3.23	0.64	0.05	3.36	-10.50	-10.12	-7.30	-3.93	14
	7085	227	1.72	-0.77	3.66	1.56	-0.82	3.54	1.60	-0.57	3.66	-10.50	-10.12	-7.30	-3.64	14

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]	
UNII5	5985	7	-1.22	-2.81	1.07	-1.19	-2.72	1.12	-1.33	-2.50	1.13	-10.07	-9.91	-6.98	-5.85	14
	6145	39	-1.24	-2.42	1.22	-1.36	-2.65	1.05	-1.20	-2.61	1.16	-10.07	-9.91	-6.98	-5.76	14
	6385	87	-2.43	-2.44	0.58	-2.54	-2.37	0.55	-2.34	-2.45	0.61	-10.07	-9.91	-6.98	-6.36	14
UNII6	6465	103	-2.22	-2.48	0.66	-2.33	-2.56	0.57	-2.22	-2.23	0.79	-10.38	-10.60	-7.48	-6.69	14
	6545	119	-2.40	-2.89	0.37	-2.45	-3.01	0.29	-2.27	-2.73	0.51	-10.38	-10.60	-7.48	-6.97	14
UNII7	6625	135	-2.30	-2.31	0.71	-2.43	-2.42	0.59	-2.22	-2.38	0.71	-10.38	-10.60	-7.48	-6.77	14
	6705	151	-2.07	-2.47	0.74	-2.28	-2.47	0.63	-2.15	-2.49	0.69	-10.38	-10.60	-7.48	-6.74	14
	6785	167	-2.17	-3.02	0.44	-2.27	-3.01	0.39	-2.06	-2.90	0.55	-10.38	-10.60	-7.48	-6.93	14
UNII8	6865	183	-1.97	-2.85	0.62	-2.14	-3.06	0.44	-2.19	-3.05	0.41	-10.50	-10.12	-7.30	-6.68	14
	6945	199	-1.65	-2.55	0.93	-1.86	-2.79	0.71	-2.11	-2.76	0.58	-10.50	-10.12	-7.30	-6.36	14
	7025	215	-1.47	-3.69	0.57	-1.61	-3.78	0.45	-1.94	-3.85	0.22	-10.50	-10.12	-7.30	-6.72	14

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]									
UNII5	5985	7	1.17	-0.83	3.30	1.16	-1.17	3.16	1.21	-1.01	3.25	-10.07	-9.91	-6.98	-3.68	14
	6145	39	0.73	-0.71	3.08	0.66	-0.73	3.03	0.92	-0.68	3.20	-10.07	-9.91	-6.98	-3.77	14
	6385	87	-0.27	-0.46	2.65	-0.29	-0.44	2.65	-0.35	-0.40	2.63	-10.07	-9.91	-6.98	-4.33	14
UNII6	6465	103	-0.32	-0.29	2.71	-0.44	-0.40	2.59	-0.54	-0.30	2.59	-10.38	-10.60	-7.48	-4.77	14
	6545	119	-0.20	-0.25	2.79	-0.27	-0.39	2.68	-0.30	-0.39	2.67	-10.38	-10.60	-7.48	-4.69	14
UNII7	6625	135	0.21	-0.15	3.05	0.06	-0.32	2.88	0.10	-0.41	2.86	-10.38	-10.60	-7.48	-4.43	14
	6705	151	0.13	-0.35	2.91	-0.15	-0.51	2.68	-0.17	-0.65	2.61	-10.38	-10.60	-7.48	-4.57	14
	6785	167	0.36	-0.82	2.82	0.11	-0.87	2.66	0.13	-0.70	2.75	-10.38	-10.60	-7.48	-4.66	14
UNII8	6865	183	0.51	-0.98	2.84	0.21	-1.09	2.62	0.02	-0.91	2.59	-10.50	-10.12	-7.30	-4.46	14
	6945	199	0.71	-0.55	3.14	0.42	-0.61	2.95	0.15	-0.43	2.88	-10.50	-10.12	-7.30	-4.16	14
	7025	215	1.01	-1.10	3.10	0.84	-0.91	3.06	0.55	-0.66	3.00	-10.50	-10.12	-7.30	-4.20	14

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	7.96	6.85	10.45	7.85	6.77	10.35	7.82	6.73	10.32	-10.07	-9.91	-6.98	3.47	14
	6145	39	8.36	7.66	11.03	8.35	7.64	11.02	8.30	7.60	10.97	-10.07	-9.91	-6.98	4.06	14
	6385	87	8.31	8.27	11.30	8.32	8.23	11.29	8.36	8.22	11.30	-10.07	-9.91	-6.98	4.32	14
UNII6	6465	103	8.04	7.27	10.68	8.03	7.30	10.69	8.05	7.26	10.69	-10.38	-10.60	-7.48	3.21	14
	6545	119	8.45	7.77	11.13	8.41	7.75	11.10	8.38	7.79	11.10	-10.38	-10.60	-7.48	3.65	14
UNII7	6625	135	8.08	8.25	11.18	8.07	8.25	11.17	8.02	8.32	11.18	-10.38	-10.60	-7.48	3.71	14
	6705	151	8.25	8.16	11.21	8.27	8.17	11.23	8.26	8.25	11.26	-10.38	-10.60	-7.48	3.78	14
	6785	167	8.58	7.58	11.12	8.57	7.58	11.11	8.55	7.54	11.09	-10.38	-10.60	-7.48	3.64	14
UNII8	6865	183	8.47	8.06	11.28	8.47	8.09	11.29	8.49	8.06	11.29	-10.50	-10.12	-7.30	4.00	14
	6945	199	8.86	8.03	11.47	8.85	8.05	11.47	8.89	8.03	11.49	-10.50	-10.12	-7.30	4.19	14
	7025	215	8.45	7.92	11.20	8.44	7.86	11.17	8.48	7.85	11.19	-10.50	-10.12	-7.30	3.90	14

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]	
UNII5	6025	15	-1.93	-3.45	0.39	-1.43	-2.94	0.89	-1.35	-2.65	1.06	-10.07	-9.91	-6.98	-5.92	14
	6185	47	-2.03	-2.21	0.89	-1.78	-2.16	1.05	-1.66	-2.17	1.11	-10.07	-9.91	-6.98	-5.87	14
	6345	79	-2.35	-2.67	0.50	-2.30	-2.62	0.55	-2.01	-2.78	0.63	-10.07	-9.91	-6.98	-6.35	14
UNII6	6505	111	-2.49	-3.23	0.17	-2.31	-3.02	0.36	-2.24	-2.67	0.56	-10.38	-10.60	-7.48	-6.92	14
UNII7	6665	143	-2.50	-2.70	0.41	-2.30	-2.50	0.61	-2.15	-2.45	0.71	-10.38	-10.60	-7.48	-6.76	14
UNII8	6825	175	-2.36	-3.41	0.16	-2.19	-3.15	0.37	-2.07	-2.89	0.55	-10.50	-10.12	-7.30	-6.75	14
	6985	207	-1.62	-3.07	0.73	-1.53	-3.01	0.80	-1.79	-2.98	0.66	-10.50	-10.12	-7.30	-6.50	14

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum e.i.r.p [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	0.66	-0.15	3.28	1.03	-0.19	3.47	1.19	0.02	3.65	-10.07	-9.91	-6.98	-3.33	14
	6185	47	0.42	-0.24	3.11	0.65	0.00	3.35	0.92	0.06	3.52	-10.07	-9.91	-6.98	-3.46	14
	6345	79	0.34	-0.15	3.11	0.47	0.07	3.28	0.64	0.24	3.46	-10.07	-9.91	-6.98	-3.52	14
UNII6	6505	111	0.03	-0.07	2.99	0.22	0.06	3.15	0.09	0.17	3.14	-10.38	-10.60	-7.48	-4.33	14
UNII7	6665	143	0.48	-0.05	3.23	0.63	0.09	3.38	0.65	0.00	3.35	-10.38	-10.60	-7.48	-4.10	14
UNII8	6825	175	0.59	-0.73	2.99	0.62	-0.51	3.10	0.60	-0.30	3.19	-10.50	-10.12	-7.30	-4.11	14
	6985	207	1.07	-0.76	3.26	1.07	-0.49	3.37	0.82	-0.21	3.35	-10.50	-10.12	-7.30	-3.93	14

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]									
UNII5	6025	15	8.34	7.05	10.75	8.25	7.02	10.69	8.16	6.93	10.60	-10.07	-9.91	-6.98	3.77	14
	6185	47	8.49	7.99	11.26	8.48	7.97	11.24	8.41	7.90	11.18	-10.07	-9.91	-6.98	4.28	14
	6345	79	8.46	8.38	11.43	8.49	8.37	11.44	8.46	8.32	11.40	-10.07	-9.91	-6.98	4.46	14
UNII6	6505	111	8.47	7.92	11.21	8.45	7.92	11.20	8.45	7.90	11.20	-10.38	-10.60	-7.48	3.73	14
UNII7	6665	143	8.28	7.43	10.89	8.27	7.43	10.88	8.22	7.48	10.88	-10.38	-10.60	-7.48	3.41	14
UNII8	6825	175	8.85	8.19	11.55	8.86	8.20	11.55	8.83	8.16	11.52	-10.50	-10.12	-7.30	4.25	14
	6985	207	8.61	8.07	11.36	8.62	8.06	11.36	8.64	8.03	11.35	-10.50	-10.12	-7.30	4.07	14

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dB]	[dB]	[dBm/MHz]	[dBm]
UNII5	6025	15	-1.41	-2.71	1.00	-1.21	-2.66	1.13	-1.52	-2.93	0.84	-10.07	-9.91	-6.98	-5.85	14
	6185	47	-1.79	-2.18	1.03	-1.87	-2.39	0.89	-1.85	-2.65	0.78	-10.07	-9.91	-6.98	-5.95	14
	6345	79	-1.99	-2.81	0.63	-1.97	-2.71	0.69	-2.11	-2.98	0.49	-10.07	-9.91	-6.98	-6.29	14
UNII6	6505	111	-2.30	-2.72	0.50	-2.25	-2.80	0.49	-2.37	-2.80	0.43	-10.38	-10.60	-7.48	-6.98	14
UNII7	6665	143	-2.16	-2.41	0.73	-2.31	-2.45	0.63	-2.51	-2.92	0.30	-10.38	-10.60	-7.48	-6.75	14
UNII8	6825	175	-2.00	-3.08	0.51	-2.10	-3.21	0.39	-2.42	-3.52	0.08	-10.50	-10.12	-7.30	-6.79	14
	6985	207	-1.78	-3.02	0.65	-1.83	-3.09	0.60	-2.44	-3.39	0.12	-10.50	-10.12	-7.30	-6.65	14

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dB]	[dB]	[dBm/MHz]	[dBm]
UNII5	6025	15	1.22	0.16	3.73	1.31	-0.05	3.69	1.21	-0.40	3.49	-10.07	-9.91	-6.98	-3.25	14
	6185	47	0.95	0.02	3.52	0.95	0.14	3.57	0.96	0.04	3.53	-10.07	-9.91	-6.98	-3.41	14
	6345	79	0.69	0.31	3.51	0.74	0.34	3.56	0.41	0.08	3.26	-10.07	-9.91	-6.98	-3.42	14
UNII6	6505	111	-0.01	0.08	3.04	0.00	-0.07	2.98	-0.31	-0.39	2.66	-10.38	-10.60	-7.48	-4.44	14
UNII7	6665	143	0.57	-0.03	3.29	0.31	-0.14	3.10	-0.07	-0.58	2.69	-10.38	-10.60	-7.48	-4.19	14
UNII8	6825	175	0.57	-0.32	3.16	0.31	-0.39	2.98	-0.18	-0.52	2.66	-10.50	-10.12	-7.30	-4.14	14
	6985	207	0.79	-0.09	3.38	0.67	0.14	3.42	0.10	0.08	3.10	-10.50	-10.12	-7.30	-3.87	14

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dBm/MHz]	[dBm]
UNII5	6025	15	8.65	7.27	11.03	8.60	7.24	10.98	8.52	7.22	10.92	-10.07	-9.91	-6.98	4.05	14
	6185	47	8.54	8.19	11.38	8.54	8.19	11.38	8.50	8.11	11.32	-10.07	-9.91	-6.98	4.40	14
	6345	79	8.38	8.54	11.47	8.36	8.51	11.45	8.40	8.53	11.47	-10.07	-9.91	-6.98	4.50	14
UNII6	6505	111	8.47	7.77	11.14	8.42	7.79	11.13	8.40	7.80	11.12	-10.38	-10.60	-7.48	3.66	14
UNII7	6665	143	8.26	7.12	10.74	8.29	7.16	10.78	8.28	7.22	10.79	-10.38	-10.60	-7.48	3.31	14
UNII8	6825	175	8.84	8.11	11.50	8.85	8.12	11.51	8.87	8.09	11.51	-10.50	-10.12	-7.30	4.21	14
	6985	207	8.53	8.34	11.45	8.50	8.30	11.41	8.54	8.26	11.41	-10.50	-10.12	-7.30	4.15	14

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	11.59	10.29	14.00	11.50	10.23	13.93	11.39	10.16	13.83	-10.07	-9.91	-6.98	7.02	14
	6185	47	11.43	10.85	14.16	11.38	10.79	14.11	11.38	10.74	14.08	-10.07	-9.91	-6.98	7.18	14
	6345	79	11.44	11.30	14.38	11.46	11.27	14.38	11.51	11.22	14.38	-10.07	-9.91	-6.98	7.40	14
UNII6	6505	111	11.33	10.47	13.93	11.35	10.47	13.94	11.35	10.52	13.97	-10.38	-10.60	-7.48	6.49	14
UNII7	6665	143	11.30	9.99	13.70	11.26	10.05	13.71	11.29	10.12	13.75	-10.38	-10.60	-7.48	6.28	14
UNII8	6825	175	11.82	11.19	14.52	11.80	11.18	14.51	11.83	11.19	14.53	-10.50	-10.12	-7.30	7.23	14
	6985	207	11.40	10.97	14.20	11.44	10.97	14.22	11.48	10.83	14.18	-10.50	-10.12	-7.30	6.92	14

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	11.58	10.23	13.96	11.51	10.22	13.93	11.48	10.19	13.90	-10.07	-9.91	-6.98	6.99	14
	6185	47	11.52	10.88	14.22	11.47	10.86	14.19	11.45	10.81	14.15	-10.07	-9.91	-6.98	7.24	14
	6345	79	11.51	11.28	14.41	11.53	11.32	14.44	11.55	11.26	14.42	-10.07	-9.91	-6.98	7.46	14
UNII6	6505	111	11.38	10.44	13.94	11.38	10.47	13.96	11.37	10.47	13.95	-10.38	-10.60	-7.48	6.48	14
UNII7	6665	143	11.34	10.07	13.76	11.30	10.11	13.76	11.30	10.10	13.75	-10.38	-10.60	-7.48	6.28	14
UNII8	6825	175	11.82	11.21	14.54	11.80	11.15	14.50	11.84	11.22	14.55	-10.50	-10.12	-7.30	7.25	14
	6985	207	11.36	10.94	14.17	11.40	10.93	14.18	11.41	10.87	14.16	-10.50	-10.12	-7.30	6.88	14

Mode : EHT320(80LL) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	-3.42	-4.76	-1.03	-3.01	-4.29	-0.59	-2.78	-3.77	-0.24	-10.07	-9.91	-6.98	-7.22	14
	6265	63	-3.45	-3.18	-0.30	-3.31	-3.12	-0.20	-2.96	-2.90	0.08	-10.07	-9.91	-6.98	-6.90	14
UNII6	6425	95	-2.88	-2.82	0.16	-2.94	-2.79	0.15	-2.54	-2.82	0.33	-10.38	-10.60	-7.48	-7.14	14
	6585	127	-3.17	-3.99	-0.55	-3.00	-3.83	-0.39	-2.73	-3.36	-0.02	-10.38	-10.60	-7.48	-7.50	14
UNII8	6745	159	-3.13	-4.17	-0.61	-2.96	-3.83	-0.36	-2.55	-3.49	0.02	-10.50	-10.12	-7.30	-7.28	14
	6905	191	-2.93	-4.19	-0.51	-2.83	-3.97	-0.35	-2.44	-3.66	0.00	-10.50	-10.12	-7.30	-7.29	14

Mode : EHT320(80LL) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	-0.64	-1.26	2.07	-0.31	-1.34	2.22	0.07	-0.93	2.61	-10.07	-9.91	-6.98	-4.37	14
	6265	63	-0.60	-0.88	2.27	-0.37	-0.55	2.55	0.08	-0.31	2.90	-10.07	-9.91	-6.98	-4.08	14
UNII6	6425	95	0.20	-0.06	3.08	0.24	0.09	3.17	0.49	0.46	3.49	-10.38	-10.60	-7.48	-3.99	14
	6585	127	0.43	0.03	3.25	0.62	0.13	3.39	0.64	0.41	3.54	-10.38	-10.60	-7.48	-3.94	14
UNII8	6745	159	0.02	-1.10	2.51	0.20	-0.97	2.67	0.49	-0.81	2.90	-10.50	-10.12	-7.30	-4.40	14
	6905	191	0.69	-0.91	2.97	0.72	-0.70	3.08	0.90	-0.32	3.34	-10.50	-10.12	-7.30	-3.96	14

Mode : EHT320(80LL) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	7.81	7.32	10.58	7.74	7.33	10.55	7.68	7.26	10.49	-10.07	-9.91	-6.98	3.60	14
	6265	63	8.49	7.60	11.08	8.49	7.60	11.07	8.42	7.55	11.02	-10.07	-9.91	-6.98	4.10	14
UNII6	6425	95	8.49	6.78	10.73	8.52	6.79	10.75	8.51	6.80	10.75	-10.38	-10.60	-7.48	3.27	14
	6585	127	8.05	8.61	11.35	8.06	8.65	11.37	8.08	8.62	11.37	-10.38	-10.60	-7.48	3.90	14
UNII8	6745	159	8.42	8.60	11.52	8.41	8.61	11.52	8.39	8.68	11.55	-10.50	-10.12	-7.30	4.25	14
	6905	191	8.69	8.19	11.46	8.71	8.23	11.49	8.69	8.19	11.46	-10.50	-10.12	-7.30	4.19	14

Mode : EHT320(80LM) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	-2.48	-3.68	-0.03	-1.74	-2.92	0.72	-1.03	-2.09	1.48	-10.07	-9.91	-6.98	-5.50	14
	6265	63	-2.83	-2.72	0.24	-2.28	-2.33	0.71	-1.24	-1.58	1.60	-10.07	-9.91	-6.98	-5.38	14
UNII6	6425	95	-2.31	-2.53	0.59	-1.79	-1.79	1.22	-1.00	-1.13	1.95	-10.38	-10.60	-7.48	-5.53	14
	6585	127	-2.58	-3.13	0.16	-1.92	-2.66	0.73	-1.06	-1.63	1.68	-10.38	-10.60	-7.48	-5.80	14
UNII8	6745	159	-2.33	-3.16	0.29	-1.89	-2.51	0.82	-1.06	-1.79	1.60	-10.50	-10.12	-7.30	-5.70	14
	6905	191	-2.21	-3.49	0.21	-1.74	-3.02	0.68	-1.09	-2.28	1.36	-10.50	-10.12	-7.30	-5.93	14

Mode : EHT320(80LM) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.27	-0.57	2.88	0.97	-0.13	3.46	1.95	0.61	4.34	-10.07	-9.91	-6.98	-2.64	14
	6265	63	0.31	-0.17	3.09	0.93	0.50	3.73	1.96	1.48	4.74	-10.07	-9.91	-6.98	-2.24	14
UNII6	6425	95	0.75	0.49	3.63	1.32	1.22	4.28	1.94	1.96	4.96	-10.38	-10.60	-7.48	-2.52	14
	6585	127	0.61	0.55	3.59	1.25	1.04	4.16	1.98	1.82	4.91	-10.38	-10.60	-7.48	-2.57	14
UNII8	6745	159	0.60	-0.59	3.06	0.98	-0.08	3.49	1.67	0.56	4.16	-10.50	-10.12	-7.30	-3.14	14
	6905	191	1.05	-0.09	3.53	1.40	0.44	3.96	1.88	1.37	4.64	-10.50	-10.12	-7.30	-2.65	14

Mode : EHT320(80LM) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	8.11	7.55	10.85	8.08	7.56	10.84	8.03	7.54	10.80	-10.07	-9.91	-6.98	3.87	14
	6265	63	8.54	7.82	11.21	8.56	7.79	11.20	8.50	7.72	11.14	-10.07	-9.91	-6.98	4.23	14
UNII6	6425	95	8.39	6.94	10.73	8.39	6.91	10.72	8.43	6.90	10.74	-10.38	-10.60	-7.48	3.26	14
	6585	127	8.04	8.43	11.25	8.03	8.48	11.27	7.99	8.50	11.26	-10.38	-10.60	-7.48	3.79	14
UNII8	6745	159	8.41	8.32	11.37	8.42	8.34	11.39	8.43	8.43	11.44	-10.50	-10.12	-7.30	4.14	14
	6905	191	8.66	8.11	11.40	8.68	8.14	11.43	8.71	8.14	11.44	-10.50	-10.12	-7.30	4.15	14

Mode : EHT320(80MH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	-1.08	-2.34	1.35	-1.59	-2.95	0.79	-2.41	-3.83	-0.05	-10.07	-9.91	-6.98	-5.63	14
	6265	63	-1.32	-1.55	1.57	-2.05	-2.31	0.83	-2.67	-3.36	0.01	-10.07	-9.91	-6.98	-5.41	14
UNII6	6425	95	-1.06	-1.23	1.86	-1.64	-1.83	1.28	-2.48	-2.44	0.55	-10.38	-10.60	-7.48	-5.62	14
	6585	127	-1.08	-1.62	1.67	-1.62	-2.23	1.09	-2.31	-3.06	0.34	-10.38	-10.60	-7.48	-5.81	14
UNII8	6745	159	-1.05	-1.80	1.60	-1.62	-2.30	1.06	-2.35	-3.12	0.29	-10.50	-10.12	-7.30	-5.70	14
	6905	191	-1.12	-2.37	1.31	-1.79	-3.12	0.61	-2.93	-4.02	-0.43	-10.50	-10.12	-7.30	-5.99	14

Mode : EHT320(80MH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	1.86	0.70	4.33	1.34	0.12	3.78	0.72	-0.80	3.03	-10.07	-9.91	-6.98	-2.65	14
	6265	63	1.93	1.47	4.72	1.34	0.86	4.12	0.63	0.14	3.40	-10.07	-9.91	-6.98	-2.26	14
UNII6	6425	95	1.89	1.97	4.94	1.31	1.37	4.36	0.25	0.56	3.42	-10.38	-10.60	-7.48	-2.54	14
	6585	127	1.98	1.79	4.90	1.37	1.17	4.28	0.45	0.10	3.29	-10.38	-10.60	-7.48	-2.58	14
UNII8	6745	159	1.61	0.51	4.10	0.88	-0.06	3.45	-0.01	-0.80	2.62	-10.50	-10.12	-7.30	-3.20	14
	6905	191	1.78	1.41	4.61	1.02	0.82	3.93	-0.14	0.03	2.95	-10.50	-10.12	-7.30	-2.69	14

Mode : EHT320(80MH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	8.18	7.77	10.99	8.18	7.72	10.96	8.12	7.69	10.92	-10.07	-9.91	-6.98	4.01	14
	6265	63	8.46	8.03	11.26	8.52	8.02	11.29	8.50	8.02	11.28	-10.07	-9.91	-6.98	4.31	14
UNII6	6425	95	8.28	6.83	10.63	8.28	6.89	10.65	8.30	6.86	10.65	-10.38	-10.60	-7.48	3.17	14
	6585	127	8.11	8.27	11.20	8.10	8.31	11.21	8.05	8.37	11.22	-10.38	-10.60	-7.48	3.74	14
UNII8	6745	159	8.39	8.12	11.26	8.41	8.13	11.29	8.41	8.12	11.28	-10.50	-10.12	-7.30	3.99	14
	6905	191	8.46	8.07	11.28	8.47	8.09	11.30	8.51	8.11	11.33	-10.50	-10.12	-7.30	4.03	14

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	-2.53	-4.20	-0.28	-2.86	-4.42	-0.56	-2.88	-4.74	-0.70	-10.07	-9.91	-6.98	-7.25	14
	6265	63	-2.77	-3.54	-0.13	-2.94	-3.57	-0.24	-3.10	-3.93	-0.49	-10.07	-9.91	-6.98	-7.10	14
UNII6	6425	95	-2.63	-2.61	0.39	-2.75	-2.84	0.22	-2.89	-2.93	0.10	-10.38	-10.60	-7.48	-7.09	14
	6585	127	-2.47	-3.14	0.22	-2.77	-3.37	-0.05	-2.97	-3.91	-0.41	-10.38	-10.60	-7.48	-7.26	14
UNII8	6745	159	-2.46	-3.29	0.15	-2.71	-3.62	-0.13	-3.09	-4.02	-0.52	-10.50	-10.12	-7.30	-7.15	14
	6905	191	-3.10	-4.14	-0.58	-3.33	-4.36	-0.81	-3.99	-4.78	-1.35	-10.50	-10.12	-7.30	-7.88	14

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.53	-0.92	2.87	0.43	-1.13	2.73	0.40	-1.23	2.67	-10.07	-9.91	-6.98	-4.11	14
	6265	63	0.49	0.03	3.28	0.37	-0.08	3.16	-0.02	-0.42	2.80	-10.07	-9.91	-6.98	-3.70	14
UNII6	6425	95	-0.02	0.29	3.14	-0.18	-0.01	2.92	-0.47	-0.38	2.59	-10.38	-10.60	-7.48	-4.33	14
	6585	127	0.24	-0.15	3.06	-0.16	-0.42	2.72	-0.51	-0.88	2.32	-10.38	-10.60	-7.48	-4.42	14
UNII8	6745	159	-0.25	-1.04	2.39	-0.63	-1.28	2.07	-1.16	-1.47	1.70	-10.50	-10.12	-7.30	-4.91	14
	6905	191	-0.41	-0.14	2.74	-0.65	-0.14	2.62	-1.25	-0.45	2.18	-10.50	-10.12	-7.30	-4.56	14

Mode : EHT320(80HH) MRU 484T+242T

Model: LHM320(800MHz) MK8 484712421

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	8.22	7.99	11.12	8.22	7.95	11.10	8.16	7.90	11.04	-10.07	-9.91	-6.98	4.14	14
	6265	63	8.36	8.21	11.30	8.38	8.17	11.29	8.44	8.16	11.31	-10.07	-9.91	-6.98	4.33	14
UNII6	6425	95	8.22	6.72	10.55	8.19	6.75	10.54	8.18	6.78	10.54	-10.38	-10.60	-7.48	3.07	14
	6585	127	8.11	8.04	11.08	8.11	8.05	11.09	8.10	8.11	11.12	-10.38	-10.60	-7.48	3.64	14
UNII8	6745	159	8.37	8.04	11.22	8.38	8.07	11.23	8.39	8.08	11.25	-10.50	-10.12	-7.30	3.95	14
	6905	191	8.31	8.31	11.32	8.30	8.33	11.33	8.36	8.31	11.34	-10.50	-10.12	-7.30	4.05	14

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.06	10.30	13.70	10.98	10.23	13.63	10.86	10.16	13.53	-10.07	-9.91	-6.98	6.72	14
	6265	63	11.76	10.68	14.26	11.72	10.62	14.22	11.70	10.54	14.16	-10.07	-9.91	-6.98	7.28	14
UNII6	6425	95	11.64	10.19	13.99	11.65	10.19	13.99	11.70	10.16	14.00	-10.38	-10.60	-7.48	6.53	14
	6585	127	11.17	11.37	14.28	11.21	11.37	14.30	11.18	11.46	14.33	-10.38	-10.60	-7.48	6.86	14
UNII8	6745	159	11.59	10.92	14.27	11.54	10.96	14.27	11.58	11.06	14.34	-10.50	-10.12	-7.30	7.04	14
	6905	191	11.60	11.19	14.41	11.58	11.18	14.40	11.64	11.22	14.44	-10.50	-10.12	-7.30	7.15	14

Mode : EHT320(160U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.28	10.66	13.99	11.22	10.57	13.92	11.21	10.53	13.90	-10.07	-9.91	-6.98	7.01	14
	6265	63	11.64	11.05	14.37	11.66	11.00	14.36	11.72	10.99	14.38	-10.07	-9.91	-6.98	7.40	14
UNII6	6425	95	11.44	10.07	13.82	11.47	10.07	13.84	11.48	10.16	13.88	-10.38	-10.60	-7.48	6.40	14
	6585	127	11.25	10.94	14.11	11.21	11.06	14.15	11.27	11.13	14.21	-10.38	-10.60	-7.48	6.73	14
UNII8	6745	159	11.54	10.57	14.09	11.53	10.57	14.08	11.58	10.61	14.13	-10.50	-10.12	-7.30	6.84	14
	6905	191	11.28	11.24	14.27	11.33	11.25	14.30	11.33	11.12	14.23	-10.50	-10.12	-7.30	7.01	14

Mode : EHT320 3x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.20	10.50	13.88	11.12	10.44	13.81	11.06	10.34	13.73	-10.07	-9.91	-6.98	6.90	14
	6265	63	11.68	10.90	14.32	11.69	10.87	14.31	11.71	10.74	14.27	-10.07	-9.91	-6.98	7.34	14
UNII6	6425	95	11.51	10.17	13.90	11.54	10.12	13.90	11.60	10.19	13.96	-10.38	-10.60	-7.48	6.48	14
	6585	127	11.21	11.17	14.20	11.26	11.23	14.25	11.20	11.33	14.28	-10.38	-10.60	-7.48	6.80	14
UNII8	6745	159	11.52	10.69	14.14	11.58	10.76	14.20	11.56	10.86	14.23	-10.50	-10.12	-7.30	6.93	14
	6905	191	11.41	11.22	14.33	11.45	11.25	14.36	11.52	11.19	14.37	-10.50	-10.12	-7.30	7.07	14

Mode : EHT320 2x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.29	10.56	13.95	11.16	10.45	13.83	11.34	10.61	14.00	-10.07	-9.91	-6.98	7.02	14
	6265	63	11.90	10.96	14.46	11.88	10.85	14.40	11.89	11.04	14.49	-10.07	-9.91	-6.98	7.51	14
UNII6	6425	95	11.73	10.34	14.10	11.78	10.34	14.13	11.70	10.38	14.10	-10.38	-10.60	-7.48	6.65	14
	6585	127	11.33	11.48	14.42	11.36	11.54	14.46	11.36	11.38	14.38	-10.38	-10.60	-7.48	6.98	14
UNII8	6745	159	11.69	10.95	14.34	11.73	11.05	14.42	11.68	10.88	14.31	-10.50	-10.12	-7.30	7.12	14
	6905	191	11.63	11.34	14.50	11.67	11.35	14.52	11.57	11.35	14.47	-10.50	-10.12	-7.30	7.22	14

Mode : EHT320 3x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.34	10.73	14.05	11.20	10.91	14.07	11.21	10.56	13.91	-10.07	-9.91	-6.98	7.09	14
	6265	63	11.87	10.89	14.41	11.90	11.12	14.54	11.82	10.89	14.39	-10.07	-9.91	-6.98	7.56	14
UNII6	6425	95	11.79	10.08	14.03	11.70	10.14	14.00	11.79	10.21	14.08	-10.38	-10.60	-7.48	6.60	14
	6585	127	11.53	11.57	14.56	11.60	11.58	14.60	11.53	11.61	14.58	-10.38	-10.60	-7.48	7.12	14
UNII8	6745	159	11.72	10.69	14.25	11.76	10.81	14.32	11.86	10.85	14.40	-10.50	-10.12	-7.30	7.10	14
	6905	191	11.63	11.31	14.48	11.67	11.08	14.40	11.71	11.27	14.50	-10.50	-10.12	-7.30	7.21	14

10.4 POWER SPECTRAL DENSITY

10.4.1 Indoor client

Indoor client Limit : -1 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.4.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode: EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-3.335	-4.267	-0.766	-4.633	-5.677	-2.113	-2.965	-4.366	-0.599	-10.07	-9.91	-6.98	-7.578	-1
	6175	45	-4.029	-4.477	-1.237	-5.601	-5.837	-2.707	-3.908	-4.519	-1.192	-10.07	-9.91	-6.98	-8.172	-1
	6415	93	-4.903	-4.626	-1.752	-5.956	-6.485	-3.202	-4.730	-4.947	-1.827	-10.07	-9.91	-6.98	-8.731	-1
UNII6	6435	97	-4.605	-4.678	-1.631	-6.053	-6.009	-3.020	-4.625	-4.927	-1.763	-10.38	-10.60	-7.48	-9.110	-1
	6475	105	-4.961	-5.149	-2.043	-6.065	-6.606	-3.317	-4.851	-4.766	-1.798	-10.38	-10.60	-7.48	-9.277	-1
	6515	113	-4.733	-5.053	-1.880	-6.015	-6.502	-3.241	-4.759	-5.156	-1.942	-10.38	-10.60	-7.48	-9.359	-1
UNII7	6535	117	-4.884	-5.303	-2.078	-6.030	-6.665	-3.325	-4.641	-5.192	-1.897	-10.38	-10.60	-7.48	-9.376	-1
	6695	149	-4.659	-4.910	-1.772	-5.927	-6.376	-3.135	-4.770	-5.034	-1.889	-10.38	-10.60	-7.48	-9.251	-1
	6855	181	-4.520	-5.371	-1.914	-6.015	-6.735	-3.350	-4.357	-5.294	-1.790	-10.38	-10.60	-7.48	-9.269	-1
UNII8	6875	185	-4.422	-5.215	-1.790	-5.898	-6.660	-3.252	-4.567	-5.410	-1.958	-10.50	-10.12	-7.30	-9.088	-1
	6995	209	-4.194	-5.010	-1.572	-5.583	-6.525	-3.018	-4.299	-5.287	-1.754	-10.50	-10.12	-7.30	-8.870	-1
	7115	233	-2.758	-5.800	-1.007	-4.265	-6.973	-2.401	-2.563	-5.623	-0.818	-10.50	-10.12	-7.30	-8.116	-1

Mode: EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-3.007	-4.232	-0.566	-3.055	-4.312	-0.628	-3.124	-4.369	-0.692	-10.07	-9.91	-6.98	-7.545	-1
	6175	45	-3.379	-3.977	-0.657	-3.880	-4.399	-1.121	-3.396	-4.282	-0.806	-10.07	-9.91	-6.98	-7.637	-1
	6415	93	-4.469	-4.043	-1.240	-4.638	-4.398	-1.506	-4.411	-3.968	-1.173	-10.07	-9.91	-6.98	-8.153	-1
UNII6	6435	97	-4.182	-3.996	-1.077	-4.335	-4.113	-1.212	-4.238	-4.045	-1.130	-10.38	-10.60	-7.48	-8.556	-1
	6475	105	-4.295	-3.912	-1.089	-4.709	-4.136	-1.403	-4.402	-3.941	-1.155	-10.38	-10.60	-7.48	-8.568	-1
	6515	113	-4.775	-4.632	-1.692	-5.213	-4.534	-1.850	-5.003	-4.704	-1.840	-10.38	-10.60	-7.48	-9.171	-1
UNII7	6535	117	-4.739	-4.567	-1.642	-4.820	-4.688	-1.743	-4.632	-4.151	-1.374	-10.38	-10.60	-7.48	-8.853	-1
	6695	149	-4.450	-4.535	-1.482	-4.422	-4.886	-1.637	-4.540	-4.495	-1.507	-10.38	-10.60	-7.48	-8.961	-1
	6855	181	-4.760	-5.438	-2.075	-4.783	-5.689	-2.202	-4.900	-5.677	-2.261	-10.38	-10.60	-7.48	-9.554	-1
UNII8	6875	185	-4.893	-5.583	-2.214	-5.231	-5.748	-2.471	-4.923	-5.501	-2.192	-10.50	-10.12	-7.30	-9.489	-1
	6995	209	-5.110	-5.537	-2.308	-5.317	-5.822	-2.552	-5.010	-5.404	-2.192	-10.50	-10.12	-7.30	-9.490	-1
	7115	233	-3.190	-4.943	-0.968	-3.411	-5.277	-1.234	-3.351	-4.978	-1.078	-10.50	-10.12	-7.30	-8.266	-1

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-3.473	-3.772	-0.610	-	-	-	-3.721	-3.848	-0.774	-10.07	-9.91	-6.98	-7.589	-1
	6175	45	-2.703	-2.761	0.278	-	-	-	-2.494	-2.798	0.367	-10.07	-9.91	-6.98	-6.612	-1
	6415	93	-2.419	-2.636	0.484	-	-	-	-2.524	-2.779	0.361	-10.07	-9.91	-6.98	-6.495	-1
UNII6	6435	97	-2.305	-3.710	0.059	-	-	-	-2.165	-3.691	0.149	-10.38	-10.60	-7.48	-7.330	-1
	6475	105	-2.894	-4.341	-0.547	-	-	-	-3.167	-4.162	-0.626	-10.38	-10.60	-7.48	-8.026	-1
	6515	113	-3.527	-3.595	-0.551	-	-	-	-3.265	-3.910	-0.565	-10.38	-10.60	-7.48	-8.030	-1
UNII7	6535	117	-3.440	-3.814	-0.613	-	-	-	-3.216	-3.871	-0.521	-10.38	-10.60	-7.48	-8.000	-1
	6695	149	-2.941	-3.038	0.021	-	-	-	-3.050	-3.306	-0.166	-10.38	-10.60	-7.48	-7.458	-1
	6855	181	-2.893	-3.197	-0.032	-	-	-	-2.998	-3.360	-0.165	-10.38	-10.60	-7.48	-7.511	-1
UNII8	6875	185	-2.702	-3.296	0.022	-	-	-	-3.087	-3.343	-0.203	-10.50	-10.12	-7.30	-7.276	-1
	6995	209	-2.713	-3.040	0.137	-	-	-	-2.854	-2.990	0.089	-10.50	-10.12	-7.30	-7.161	-1
	7115	233	-2.975	-3.561	-0.248	-	-	-	-2.798	-3.430	-0.092	-10.50	-10.12	-7.30	-7.390	-1

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-1.597	-1.674	1.375	-	-	-	-10.07	-9.91	-6.98	-5.604	-1
	6175	45	-	-	-	-1.194	-2.002	1.431	-	-	-	-10.07	-9.91	-6.98	-5.548	-1
	6415	93	-	-	-	-1.112	-1.812	1.563	-	-	-	-10.07	-9.91	-6.98	-5.417	-1
UNII6	6435	97	-	-	-	-1.496	-2.511	1.037	-	-	-	-10.38	-10.60	-7.48	-6.442	-1
	6475	105	-	-	-	-1.698	-2.133	1.101	-	-	-	-10.38	-10.60	-7.48	-6.378	-1
	6515	113	-	-	-	-1.133	-1.985	1.472	-	-	-	-10.38	-10.60	-7.48	-6.007	-1
UNII7	6535	117	-	-	-	-1.160	-1.779	1.552	-	-	-	-10.38	-10.60	-7.48	-5.927	-1
	6695	149	-	-	-	-1.275	-1.465	1.642	-	-	-	-10.38	-10.60	-7.48	-5.837	-1
	6855	181	-	-	-	-1.153	-1.733	1.577	-	-	-	-10.38	-10.60	-7.48	-5.902	-1
UNII8	6875	185	-	-	-	-1.346	-1.522	1.577	-	-	-	-10.50	-10.12	-7.30	-5.720	-1
	6995	209	-	-	-	-1.057	-1.372	1.799	-	-	-	-10.50	-10.12	-7.30	-5.499	-1
	7115	233	-	-	-	-1.257	-1.797	1.492	-	-	-	-10.50	-10.12	-7.30	-5.806	-1

Mode : EHT20 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-3.849	-3.819	-0.823	-	-	-	-10.07	-9.91	-6.98	-7.803	-1
	6175	45	-	-	-	-1.529	-2.587	0.985	-	-	-	-10.07	-9.91	-6.98	-5.995	-1
	6415	93	-	-	-	-1.917	-2.367	0.874	-	-	-	-10.07	-9.91	-6.98	-6.105	-1
UNII6	6435	97	-	-	-	-1.955	-2.884	0.616	-	-	-	-10.38	-10.60	-7.48	-6.863	-1
	6475	105	-	-	-	-2.189	-2.454	0.691	-	-	-	-10.38	-10.60	-7.48	-6.788	-1
	6515	113	-	-	-	-1.873	-2.457	0.855	-	-	-	-10.38	-10.60	-7.48	-6.624	-1
UNII7	6535	117	-	-	-	-1.768	-2.430	0.924	-	-	-	-10.38	-10.60	-7.48	-6.555	-1
	6695	149	-	-	-	-1.853	-2.086	1.043	-	-	-	-10.38	-10.60	-7.48	-6.436	-1
	6855	181	-	-	-	-1.528	-2.262	1.131	-	-	-	-10.38	-10.60	-7.48	-6.348	-1
UNII8	6875	185	-	-	-	-1.982	-1.964	1.038	-	-	-	-10.50	-10.12	-7.30	-6.260	-1
	6995	209	-	-	-	-1.738	-1.896	1.194	-	-	-	-10.50	-10.12	-7.30	-6.103	-1
	7115	233	-	-	-	-4.100	-4.589	-1.327	-	-	-	-10.50	-10.12	-7.30	-8.625	-1

Mode : EHT40 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-3.352	-4.320	-0.798	-3.304	-4.632	-0.907	-2.888	-4.418	-0.575	-10.07	-9.91	-6.98	-7.555	-1
	6165	43	-4.149	-4.411	-1.267	-4.257	-4.701	-1.463	-4.026	-4.628	-1.306	-10.07	-9.91	-6.98	-8.247	-1
	6405	91	-4.895	-4.829	-1.851	-5.275	-5.032	-2.141	-4.742	-4.889	-1.804	-10.07	-9.91	-6.98	-8.784	-1
UNII6	6445	99	-4.395	-4.696	-1.532	-4.511	-5.211	-1.836	-4.650	-4.526	-1.577	-10.38	-10.60	-7.48	-9.011	-1
	6485	107	-4.636	-5.082	-1.843	-4.724	-4.999	-1.849	-4.681	-4.420	-1.538	-10.38	-10.60	-7.48	-9.017	-1
	6525	115	-4.682	-4.767	-1.714	-4.776	-5.049	-1.900	-4.521	-4.919	-1.705	-10.38	-10.60	-7.48	-9.184	-1
UNII7	6565	123	-4.725	-5.367	-2.023	-4.610	-5.325	-1.942	-4.605	-5.085	-1.828	-10.38	-10.60	-7.48	-9.307	-1
	6685	147	-4.579	-4.829	-1.692	-4.625	-4.796	-1.699	-4.549	-4.404	-1.465	-10.38	-10.60	-7.48	-8.944	-1
	6845	179	-4.698	-5.316	-1.985	-4.678	-5.468	-2.044	-4.539	-5.256	-1.872	-10.38	-10.60	-7.48	-9.351	-1
UNII8	6885	187	-4.644	-5.523	-2.051	-4.439	-5.651	-1.992	-4.597	-5.658	-2.084	-10.50	-10.12	-7.30	-9.290	-1
	7005	211	-3.823	-5.249	-1.467	-3.764	-5.512	-1.540	-4.190	-5.380	-1.734	-10.50	-10.12	-7.30	-8.765	-1
	7085	227	-2.260	-5.746	-0.652	-2.738	-5.738	-0.973	-2.832	-5.664	-1.010	-10.50	-10.12	-7.30	-7.949	-1

Mode: EHT40 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-2.671	-4.251	-0.379	-3.136	-4.978	-0.950	-2.677	-4.718	-0.568	-10.07	-9.91	-6.98	-7.358	-1
	6165	43	-3.524	-4.042	-0.765	-3.643	-4.194	-0.899	-3.371	-4.143	-0.729	-10.07	-9.91	-6.98	-7.709	-1
	6405	91	-4.465	-3.969	-1.199	-4.475	-4.189	-1.319	-4.118	-3.958	-1.027	-10.07	-9.91	-6.98	-8.006	-1
UNII6	6445	99	-4.566	-4.119	-1.326	-4.338	-4.341	-1.329	-4.386	-4.090	-1.225	-10.38	-10.60	-7.48	-8.704	-1
	6485	107	-4.292	-3.998	-1.132	-4.408	-4.008	-1.193	-4.401	-3.939	-1.153	-10.38	-10.60	-7.48	-8.611	-1
	6525	115	-4.660	-4.534	-1.586	-5.332	-4.948	-2.125	-5.004	-4.509	-1.739	-10.38	-10.60	-7.48	-9.065	-1
UNII7	6565	123	-4.977	-5.187	-2.070	-5.184	-5.335	-2.248	-5.168	-4.825	-1.983	-10.38	-10.60	-7.48	-9.462	-1
	6685	147	-4.452	-4.405	-1.418	-4.995	-4.651	-1.809	-4.765	-4.601	-1.672	-10.38	-10.60	-7.48	-8.897	-1
	6845	179	-4.279	-5.091	-1.656	-4.888	-5.932	-2.368	-4.756	-5.324	-2.020	-10.38	-10.60	-7.48	-9.135	-1
UNII8	6885	187	-5.031	-5.672	-2.329	-5.009	-5.519	-2.246	-4.651	-5.481	-2.036	-10.50	-10.12	-7.30	-9.333	-1
	7005	211	-5.073	-5.526	-2.283	-5.357	-4.996	-2.162	-5.496	-5.264	-2.368	-10.50	-10.12	-7.30	-9.460	-1
	7085	227	-3.140	-5.193	-1.036	-3.507	-5.344	-1.319	-3.258	-4.884	-0.985	-10.50	-10.12	-7.30	-8.282	-1

Mode: EHT40 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-3.677	-4.438	-1.030	-4.024	-4.903	-1.431	-3.473	-4.666	-1.018	-10.07	-9.91	-6.98	-7.998	-1
	6165	43	-2.948	-3.057	0.008	-3.012	-3.073	-0.032	-2.695	-2.954	0.188	-10.07	-9.91	-6.98	-6.792	-1
	6405	91	-2.770	-2.987	0.133	-3.078	-3.053	-0.055	-2.627	-2.876	0.261	-10.07	-9.91	-6.98	-6.719	-1
UNII6	6445	99	-2.468	-3.997	-0.155	-2.738	-4.070	-0.343	-2.451	-3.886	-0.099	-10.38	-10.60	-7.48	-7.578	-1
	6485	107	-3.232	-4.072	-0.621	-3.299	-4.088	-0.665	-3.316	-4.002	-0.635	-10.38	-10.60	-7.48	-8.100	-1
	6525	115	-3.558	-4.028	-0.776	-3.652	-4.115	-0.867	-3.559	-3.963	-0.746	-10.38	-10.60	-7.48	-8.225	-1
UNII7	6565	123	-3.307	-3.150	-0.217	-3.413	-3.299	-0.345	-3.046	-3.180	-0.102	-10.38	-10.60	-7.48	-7.581	-1
	6685	147	-2.994	-3.301	-0.134	-3.433	-3.361	-0.386	-3.313	-3.229	-0.260	-10.38	-10.60	-7.48	-7.613	-1
	6845	179	-3.074	-3.174	-0.113	-3.165	-3.472	-0.305	-3.054	-3.361	-0.194	-10.38	-10.60	-7.48	-7.592	-1
UNII8	6885	187	-3.015	-3.493	-0.237	-3.266	-3.618	-0.428	-3.069	-3.208	-0.128	-10.50	-10.12	-7.30	-7.425	-1
	7005	211	-2.827	-3.421	-0.103	-3.086	-3.493	-0.274	-2.870	-3.160	-0.002	-10.50	-10.12	-7.30	-7.300	-1
	7085	227	-3.073	-3.268	-0.159	-3.279	-3.508	-0.382	-3.480	-3.322	-0.390	-10.50	-10.12	-7.30	-7.457	-1

Mode: EHT40 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-2.028	-2.237	0.879	-	-	-	-1.838	-2.211	0.989	-10.07	-9.91	-6.98	-5.990	-1
	6165	43	-1.452	-2.202	1.199	-	-	-	-1.482	-2.020	1.267	-10.07	-9.91	-6.98	-5.712	-1
	6405	91	-1.708	-2.305	1.014	-	-	-	-1.460	-2.384	1.112	-10.07	-9.91	-6.98	-5.867	-1
UNII6	6445	99	-1.586	-2.224	1.117	-	-	-	-1.675	-2.576	0.908	-10.38	-10.60	-7.48	-6.362	-1
	6485	107	-1.467	-2.063	1.255	-	-	-	-1.558	-2.007	1.233	-10.38	-10.60	-7.48	-6.224	-1
	6525	115	-1.343	-1.985	1.358	-	-	-	-1.497	-2.154	1.197	-10.38	-10.60	-7.48	-6.121	-1
UNII7	6565	123	-1.784	-1.303	1.473	-	-	-	-2.114	-1.354	1.292	-10.38	-10.60	-7.48	-6.006	-1
	6685	147	-1.447	-1.855	1.364	-	-	-	-1.377	-1.773	1.439	-10.38	-10.60	-7.48	-6.040	-1
	6845	179	-1.181	-1.655	1.598	-	-	-	-1.308	-1.818	1.454	-10.38	-10.60	-7.48	-5.881	-1
UNII8	6885	187	-1.367	-1.666	1.496	-	-	-	-1.409	-1.682	1.467	-10.50	-10.12	-7.30	-5.802	-1
	7005	211	-1.299	-1.508	1.608	-	-	-	-1.141	-1.409	1.737	-10.50	-10.12	-7.30	-5.561	-1
	7085	227	-1.590	-1.806	1.313	-	-	-	-1.496	-1.552	1.486	-10.50	-10.12	-7.30	-5.812	-1

Mode : EHT40 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-2.459	-3.245	0.176	-	-	-	-10.07	-9.91	-6.98	-6.803	-1
	6165	43	-	-	-	-2.438	-3.013	0.294	-	-	-	-10.07	-9.91	-6.98	-6.685	-1
	6405	91	-	-	-	-2.522	-3.122	0.199	-	-	-	-10.07	-9.91	-6.98	-6.781	-1
UNII6	6445	99	-	-	-	-2.239	-3.297	0.275	-	-	-	-10.38	-10.60	-7.48	-7.204	-1
	6485	107	-	-	-	-2.355	-2.959	0.364	-	-	-	-10.38	-10.60	-7.48	-7.115	-1
	6525	115	-	-	-	-2.719	-3.005	0.151	-	-	-	-10.38	-10.60	-7.48	-7.328	-1
UNII7	6565	123	-	-	-	-2.416	-2.343	0.631	-	-	-	-10.38	-10.60	-7.48	-6.848	-1
	6685	147	-	-	-	-2.183	-2.780	0.539	-	-	-	-10.38	-10.60	-7.48	-6.940	-1
	6845	179	-	-	-	-2.003	-2.739	0.655	-	-	-	-10.38	-10.60	-7.48	-6.824	-1
UNII8	6885	187	-	-	-	-2.381	-2.559	0.541	-	-	-	-10.50	-10.12	-7.30	-6.756	-1
	7005	211	-	-	-	-2.098	-2.756	0.596	-	-	-	-10.50	-10.12	-7.30	-6.702	-1
	7085	227	-	-	-	-2.417	-2.796	0.408	-	-	-	-10.50	-10.12	-7.30	-6.890	-1

Mode : EHT40 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-2.775	-3.607	-0.161	-	-	-	-10.07	-9.91	-6.98	-7.140	-1
	6165	43	-	-	-	-2.761	-3.454	-0.083	-	-	-	-10.07	-9.91	-6.98	-7.063	-1
	6405	91	-	-	-	-3.015	-3.509	-0.245	-	-	-	-10.07	-9.91	-6.98	-7.224	-1
UNII6	6445	99	-	-	-	-2.660	-4.095	-0.308	-	-	-	-10.38	-10.60	-7.48	-7.787	-1
	6485	107	-	-	-	-2.861	-3.448	-0.134	-	-	-	-10.38	-10.60	-7.48	-7.613	-1
	6525	115	-	-	-	-3.122	-3.383	-0.240	-	-	-	-10.38	-10.60	-7.48	-7.719	-1
UNII7	6565	123	-	-	-	-2.802	-2.713	0.253	-	-	-	-10.38	-10.60	-7.48	-7.226	-1
	6685	147	-	-	-	-2.659	-2.959	0.204	-	-	-	-10.38	-10.60	-7.48	-7.275	-1
	6845	179	-	-	-	-2.594	-3.069	0.185	-	-	-	-10.38	-10.60	-7.48	-7.294	-1
UNII8	6885	187	-	-	-	-2.641	-3.091	0.150	-	-	-	-10.50	-10.12	-7.30	-7.147	-1
	7005	211	-	-	-	-2.713	-3.103	0.107	-	-	-	-10.50	-10.12	-7.30	-7.191	-1
	7085	227	-	-	-	-3.087	-3.065	-0.066	-	-	-	-10.50	-10.12	-7.30	-7.363	-1

Mode: EHT80 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.602	-4.823	-1.159	-3.574	-4.821	-1.142	-3.187	-4.475	-0.773	-10.07	-9.91	-6.98	-7.752	-1
	6145	39	-3.732	-5.292	-1.432	-4.470	-5.403	-1.901	-4.167	-5.892	-1.934	-10.07	-9.91	-6.98	-8.411	-1
	6385	87	-5.532	-5.850	-2.678	-5.288	-5.647	-2.453	-5.248	-5.195	-2.211	-10.07	-9.91	-6.98	-9.190	-1
UNII6	6465	103	-5.387	-5.470	-2.418	-5.493	-5.841	-2.653	-5.106	-5.175	-2.130	-10.38	-10.60	-7.48	-9.609	-1
	6545	119	-5.602	-5.860	-2.719	-5.599	-5.902	-2.737	-5.080	-5.553	-2.300	-10.38	-10.60	-7.48	-9.779	-1
UNII7	6625	135	-5.438	-5.136	-2.274	-5.376	-5.876	-2.608	-5.428	-5.511	-2.459	-10.38	-10.60	-7.48	-9.753	-1
	6705	151	-5.080	-5.588	-2.316	-5.602	-5.597	-2.589	-5.518	-5.616	-2.556	-10.38	-10.60	-7.48	-9.795	-1
	6785	167	-5.283	-6.345	-2.771	-5.272	-6.368	-2.775	-5.007	-5.644	-2.303	-10.38	-10.60	-7.48	-9.782	-1
UNII8	6865	183	-5.085	-5.940	-2.481	-4.966	-6.206	-2.531	-4.941	-5.866	-2.368	-10.50	-10.12	-7.30	-9.666	-1
	6945	199	-4.697	-5.420	-2.033	-4.962	-5.750	-2.328	-5.096	-5.563	-2.313	-10.50	-10.12	-7.30	-9.331	-1
	7025	215	-3.489	-5.994	-1.553	-3.808	-5.972	-1.746	-4.212	-6.370	-2.148	-10.50	-10.12	-7.30	-8.850	-1

Mode: EHT80 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-2.811	-4.649	-0.623	-2.980	-5.257	-0.961	-3.173	-4.723	-0.869	-10.07	-9.91	-6.98	-7.603	-1
	6145	39	-3.492	-4.796	-1.085	-3.824	-4.811	-1.279	-3.228	-4.797	-0.932	-10.07	-9.91	-6.98	-7.911	-1
	6385	87	-4.952	-4.868	-1.900	-4.939	-4.652	-1.783	-4.549	-4.470	-1.499	-10.07	-9.91	-6.98	-8.478	-1
UNII6	6465	103	-4.924	-4.631	-1.765	-4.877	-4.630	-1.742	-4.786	-4.520	-1.641	-10.38	-10.60	-7.48	-9.120	-1
	6545	119	-5.207	-4.903	-2.042	-5.235	-5.068	-2.140	-5.284	-4.945	-2.101	-10.38	-10.60	-7.48	-9.521	-1
UNII7	6625	135	-5.376	-5.083	-2.217	-5.607	-5.074	-2.322	-5.580	-5.535	-2.547	-10.38	-10.60	-7.48	-9.696	-1
	6705	151	-5.234	-5.260	-2.237	-5.466	-5.245	-2.344	-5.363	-5.389	-2.366	-10.38	-10.60	-7.48	-9.716	-1
	6785	167	-5.292	-6.260	-2.739	-5.648	-5.779	-2.703	-5.514	-5.566	-2.530	-10.38	-10.60	-7.48	-10.009	-1
UNII8	6865	183	-4.762	-6.188	-2.406	-5.321	-6.045	-2.658	-5.475	-5.917	-2.680	-10.50	-10.12	-7.30	-9.704	-1
	6945	199	-4.709	-5.036	-1.859	-5.104	-5.600	-2.335	-4.948	-5.187	-2.056	-10.50	-10.12	-7.30	-9.157	-1
	7025	215	-4.290	-5.951	-2.031	-4.282	-5.461	-1.821	-4.749	-5.339	-2.024	-10.50	-10.12	-7.30	-9.119	-1

Mode : EHT80 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.665	-4.705	-1.144	-3.640	-4.682	-1.120	-3.485	-4.950	-1.146	-10.07	-9.91	-6.98	-8.099	-1
	6145	39	-3.174	-3.366	-0.259	-3.339	-3.204	-0.261	-3.013	-3.298	-0.143	-10.07	-9.91	-6.98	-7.122	-1
	6385	87	-3.113	-3.296	-0.193	-3.063	-3.035	-0.039	-3.168	-2.872	-0.007	-10.07	-9.91	-6.98	-6.987	-1
UNII6	6465	103	-3.404	-4.552	-0.930	-3.514	-4.516	-0.976	-3.422	-4.413	-0.879	-10.38	-10.60	-7.48	-8.358	-1
	6545	119	-3.577	-3.999	-0.773	-3.674	-4.291	-0.961	-3.561	-4.114	-0.819	-10.38	-10.60	-7.48	-8.252	-1
UNII7	6625	135	-3.650	-3.391	-0.508	-3.747	-3.640	-0.683	-3.346	-3.816	-0.565	-10.38	-10.60	-7.48	-7.987	-1
	6705	151	-3.571	-3.525	-0.538	-3.576	-3.594	-0.575	-3.597	-3.712	-0.644	-10.38	-10.60	-7.48	-8.017	-1
	6785	167	-3.296	-4.675	-0.921	-3.334	-4.769	-0.982	-3.089	-4.550	-0.748	-10.38	-10.60	-7.48	-8.227	-1
UNII8	6865	183	-3.361	-3.785	-0.558	-3.307	-3.862	-0.566	-3.509	-3.525	-0.507	-10.50	-10.12	-7.30	-7.804	-1
	6945	199	-3.037	-3.633	-0.315	-2.882	-3.584	-0.209	-2.860	-3.322	-0.075	-10.50	-10.12	-7.30	-7.372	-1
	7025	215	-3.171	-3.999	-0.555	-3.129	-4.029	-0.546	-3.097	-3.761	-0.406	-10.50	-10.12	-7.30	-7.704	-1

Mode : EHT80 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-1.999	-2.710	0.670	-1.921	-2.710	0.712	-2.033	-2.632	0.688	-10.07	-9.91	-6.98	-6.267	-1
	6145	39	-1.768	-2.304	0.982	-1.639	-2.303	1.052	-1.439	-2.331	1.148	-10.07	-9.91	-6.98	-5.832	-1
	6385	87	-1.642	-2.264	1.068	-1.373	-2.141	1.270	-1.674	-1.850	1.249	-10.07	-9.91	-6.98	-5.709	-1
UNII6	6465	103	-2.263	-2.207	0.775	-2.159	-2.265	0.798	-2.095	-2.185	0.870	-10.38	-10.60	-7.48	-6.609	-1
	6545	119	-1.750	-2.023	1.126	-1.577	-2.092	1.183	-1.198	-1.979	1.439	-10.38	-10.60	-7.48	-6.040	-1
UNII7	6625	135	-1.849	-1.488	1.345	-2.159	-1.430	1.231	-2.320	-1.849	0.932	-10.38	-10.60	-7.48	-6.134	-1
	6705	151	-1.648	-1.439	1.468	-1.768	-1.734	1.259	-1.605	-1.856	1.281	-10.38	-10.60	-7.48	-6.011	-1
	6785	167	-1.740	-2.698	0.817	-1.607	-2.634	0.920	-1.452	-2.504	1.064	-10.38	-10.60	-7.48	-6.415	-1
UNII8	6865	183	-1.707	-1.889	1.213	-1.726	-1.892	1.202	-1.663	-1.810	1.274	-10.50	-10.12	-7.30	-6.024	-1
	6945	199	-1.246	-1.708	1.539	-0.748	-1.791	1.772	-1.113	-1.598	1.661	-10.50	-10.12	-7.30	-5.526	-1
	7025	215	-1.280	-1.975	1.396	-1.222	-1.663	1.573	-1.422	-1.837	1.385	-10.50	-10.12	-7.30	-5.725	-1

Mode : EHT80 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-2.614	-3.491	-0.020	-	-	-	-2.094	-3.821	0.138	-10.07	-9.91	-6.98	-6.841	-1
	6145	39	-2.640	-3.105	0.144	-	-	-	-2.421	-3.215	0.211	-10.07	-9.91	-6.98	-6.769	-1
	6385	87	-2.597	-2.881	0.274	-	-	-	-2.806	-2.591	0.314	-10.07	-9.91	-6.98	-6.666	-1
UNII6	6465	103	-2.761	-3.356	-0.038	-	-	-	-2.481	-3.360	0.112	-10.38	-10.60	-7.48	-7.367	-1
	6545	119	-2.961	-3.140	-0.039	-	-	-	-2.519	-2.982	0.266	-10.38	-10.60	-7.48	-7.213	-1
UNII7	6625	135	-2.802	-2.269	0.483	-	-	-	-2.858	-2.741	0.212	-10.38	-10.60	-7.48	-6.996	-1
	6705	151	-2.409	-2.292	0.661	-	-	-	-2.682	-2.429	0.457	-10.38	-10.60	-7.48	-6.818	-1
	6785	167	-2.447	-3.699	-0.017	-	-	-	-2.472	-3.517	0.048	-10.38	-10.60	-7.48	-7.431	-1
UNII8	6865	183	-2.689	-2.611	0.361	-	-	-	-2.695	-2.596	0.365	-10.50	-10.12	-7.30	-6.932	-1
	6945	199	-1.852	-2.922	0.657	-	-	-	-2.139	-2.696	0.602	-10.50	-10.12	-7.30	-6.641	-1
	7025	215	-2.369	-2.995	0.340	-	-	-	-2.514	-3.038	0.243	-10.50	-10.12	-7.30	-6.958	-1

Mode : EHT80 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-2.727	-3.442	-0.060	-	-	-	-10.07	-9.91	-6.98	-7.039	-1
	6145	39	-	-	-	-2.865	-3.748	-0.274	-	-	-	-10.07	-9.91	-6.98	-7.253	-1
	6385	87	-	-	-	-2.798	-3.477	-0.114	-	-	-	-10.07	-9.91	-6.98	-7.094	-1
UNII6	6465	103	-	-	-	-2.753	-2.872	0.198	-	-	-	-10.38	-10.60	-7.48	-7.281	-1
	6545	119	-	-	-	-2.795	-2.572	0.328	-	-	-	-10.38	-10.60	-7.48	-7.151	-1
UNII7	6625	135	-	-	-	-2.806	-2.589	0.314	-	-	-	-10.38	-10.60	-7.48	-7.165	-1
	6705	151	-	-	-	-2.659	-2.971	0.198	-	-	-	-10.38	-10.60	-7.48	-7.281	-1
	6785	167	-	-	-	-2.320	-2.865	0.426	-	-	-	-10.38	-10.60	-7.48	-7.053	-1
UNII8	6865	183	-	-	-	-2.351	-2.815	0.433	-	-	-	-10.50	-10.12	-7.30	-6.864	-1
	6945	199	-	-	-	-2.300	-2.998	0.375	-	-	-	-10.50	-10.12	-7.30	-6.923	-1
	7025	215	-	-	-	-2.281	-2.589	0.578	-	-	-	-10.50	-10.12	-7.30	-6.720	-1

Mode : EHT80 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-2.767	-3.614	-0.159	-	-	-	-10.07	-9.91	-6.98	-7.139	-1
	6145	39	-	-	-	-2.923	-4.057	-0.443	-	-	-	-10.07	-9.91	-6.98	-7.422	-1
	6385	87	-	-	-	-3.120	-3.480	-0.286	-	-	-	-10.07	-9.91	-6.98	-7.265	-1
UNII6	6465	103	-	-	-	-2.974	-3.227	-0.088	-	-	-	-10.38	-10.60	-7.48	-7.567	-1
	6545	119	-	-	-	-3.163	-3.086	-0.114	-	-	-	-10.38	-10.60	-7.48	-7.593	-1
UNII7	6625	135	-	-	-	-3.178	-2.812	0.019	-	-	-	-10.38	-10.60	-7.48	-7.460	-1
	6705	151	-	-	-	-3.138	-3.275	-0.196	-	-	-	-10.38	-10.60	-7.48	-7.675	-1
	6785	167	-	-	-	-2.787	-3.355	-0.051	-	-	-	-10.38	-10.60	-7.48	-7.530	-1
UNII8	6865	183	-	-	-	-3.256	-3.364	-0.299	-	-	-	-10.50	-10.12	-7.30	-7.597	-1
	6945	199	-	-	-	-2.745	-3.176	0.055	-	-	-	-10.50	-10.12	-7.30	-7.242	-1
	7025	215	-	-	-	-2.804	-2.981	0.119	-	-	-	-10.50	-10.12	-7.30	-7.179	-1

Mode : EHT160(80L) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.845	-5.997	-2.372	-4.412	-6.048	-2.143	-4.632	-5.585	-2.072	-10.07	-9.91	-6.98	-9.051	-1
	6185	47	-5.157	-5.413	-2.273	-4.770	-4.663	-1.706	-5.065	-5.530	-2.281	-10.07	-9.91	-6.98	-8.685	-1
	6345	79	-5.579	-5.885	-2.719	-4.880	-5.098	-1.977	-4.984	-6.102	-2.497	-10.07	-9.91	-6.98	-8.956	-1
UNII6	6505	111	-5.558	-6.242	-2.876	-5.359	-5.901	-2.611	-5.490	-5.728	-2.597	-10.38	-10.60	-7.48	-10.076	-1
UNII7	6665	143	-5.643	-6.164	-2.885	-5.315	-5.560	-2.425	-5.284	-5.703	-2.478	-10.38	-10.60	-7.48	-9.904	-1
UNII8	6825	175	-5.651	-6.986	-3.257	-5.346	-5.919	-2.613	-5.372	-6.260	-2.783	-10.50	-10.12	-7.30	-9.910	-1
	6985	207	-4.595	-6.445	-2.412	-4.984	-6.685	-2.741	-5.155	-6.486	-2.759	-10.50	-10.12	-7.30	-9.709	-1

Mode : EHT160(80L) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.913	-4.557	-1.212	-3.377	-4.637	-0.951	-3.397	-4.929	-1.085	-10.07	-9.91	-6.98	-7.930	-1
	6185	47	-4.179	-5.007	-1.563	-3.610	-4.281	-0.922	-3.920	-4.423	-1.154	-10.07	-9.91	-6.98	-7.901	-1
	6345	79	-4.227	-4.375	-1.290	-4.292	-4.123	-1.196	-4.202	-3.876	-1.025	-10.07	-9.91	-6.98	-8.005	-1
UNII6	6505	111	-5.307	-4.907	-2.092	-4.987	-4.640	-1.799	-5.219	-4.713	-1.948	-10.38	-10.60	-7.48	-9.278	-1
UNII7	6665	143	-5.110	-5.387	-2.236	-5.270	-5.098	-2.172	-5.243	-5.333	-2.277	-10.38	-10.60	-7.48	-9.651	-1
UNII8	6825	175	-5.279	-5.865	-2.551	-5.047	-5.936	-2.458	-5.157	-5.471	-2.300	-10.50	-10.12	-7.30	-9.598	-1
	6985	207	-5.004	-6.598	-2.718	-5.285	-6.692	-2.921	-5.688	-6.090	-2.874	-10.50	-10.12	-7.30	-10.015	-1

Mode: EHT160(80L) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.143	-6.163	-2.612	-5.241	-6.479	-2.805	-5.026	-6.462	-2.674	-10.07	-9.91	-6.98	-9.592	-1
	6185	47	-3.130	-3.567	-0.332	-3.060	-3.206	-0.122	-2.506	-3.416	0.073	-10.07	-9.91	-6.98	-6.906	-1
	6345	79	-3.094	-3.387	-0.227	-3.357	-3.352	-0.344	-3.271	-3.453	-0.350	-10.07	-9.91	-6.98	-7.207	-1
UNII6	6505	111	-3.676	-4.218	-0.928	-3.731	-4.251	-0.973	-3.901	-4.359	-1.113	-10.38	-10.60	-7.48	-8.407	-1
UNII7	6665	143	-3.557	-4.110	-0.814	-3.183	-4.660	-0.848	-3.678	-4.731	-1.162	-10.38	-10.60	-7.48	-8.293	-1
UNII8	6825	175	-3.402	-3.671	-0.524	-3.270	-3.857	-0.543	-3.221	-3.971	-0.569	-10.50	-10.12	-7.30	-7.821	-1
	6985	207	-3.378	-3.592	-0.473	-3.233	-3.876	-0.532	-3.677	-3.460	-0.556	-10.50	-10.12	-7.30	-7.771	-1

Mode : EHT160(80L) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-2.014	-3.019	0.522	-1.804	-2.867	0.707	-2.105	-3.157	0.411	-10.07	-9.91	-6.98	-6.273	-1
	6185	47	-1.867	-2.666	0.762	-1.909	-2.333	0.894	-1.635	-2.424	0.998	-10.07	-9.91	-6.98	-5.981	-1
	6345	79	-1.393	-1.763	1.436	-1.747	-2.164	1.059	-1.625	-1.843	1.277	-10.07	-9.91	-6.98	-5.544	-1
UNII6	6505	111	-1.639	-2.523	0.951	-1.754	-2.233	1.023	-1.730	-2.322	0.994	-10.38	-10.60	-7.48	-6.456	-1
UNII7	6665	143	-1.893	-2.289	0.923	-1.916	-2.534	0.796	-1.818	-2.691	0.777	-10.38	-10.60	-7.48	-6.556	-1
UNII8	6825	175	-1.114	-1.996	1.477	-1.254	-2.035	1.383	-1.458	-2.066	1.258	-10.50	-10.12	-7.30	-5.820	-1
	6985	207	-1.211	-2.149	1.355	-1.787	-2.122	1.059	-2.021	-2.246	0.878	-10.50	-10.12	-7.30	-5.943	-1

Mode: EHT160(80L) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-3.039	-4.274	-0.602	-	-	-	-2.842	-3.928	-0.340	-10.07	-9.91	-6.98	-7.320	-1
	6185	47	-2.824	-3.341	-0.064	-	-	-	-2.630	-3.139	0.134	-10.07	-9.91	-6.98	-6.846	-1
	6345	79	-2.537	-2.551	0.467	-	-	-	-2.470	-2.669	0.442	-10.07	-9.91	-6.98	-6.513	-1
UNII6	6505	111	-2.924	-3.552	-0.216	-	-	-	-3.118	-3.520	-0.304	-10.38	-10.60	-7.48	-7.695	-1
UNII7	6665	143	-2.813	-3.190	0.013	-	-	-	-2.672	-3.903	-0.233	-10.38	-10.60	-7.48	-7.466	-1
UNII8	6825	175	-2.440	-2.851	0.370	-	-	-	-2.331	-2.955	0.379	-10.50	-10.12	-7.30	-6.919	-1
	6985	207	-2.401	-2.843	0.394	-	-	-	-2.829	-2.643	0.276	-10.50	-10.12	-7.30	-6.903	-1

Mode: EHT160(80L) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-3.247	-4.091	-0.638	-	-	-	-10.07	-9.91	-6.98	-7.618	-1
	6185	47	-	-	-	-2.475	-3.571	0.022	-	-	-	-10.07	-9.91	-6.98	-6.958	-1
	6345	79	-	-	-	-2.741	-3.257	0.019	-	-	-	-10.07	-9.91	-6.98	-6.960	-1
UNII6	6505	111	-	-	-	-3.179	-2.875	-0.014	-	-	-	-10.38	-10.60	-7.48	-7.493	-1
UNII7	6665	143	-	-	-	-2.888	-3.302	-0.080	-	-	-	-10.38	-10.60	-7.48	-7.559	-1
UNII8	6825	175	-	-	-	-2.512	-3.115	0.207	-	-	-	-10.50	-10.12	-7.30	-7.090	-1
	6985	207	-	-	-	-2.819	-2.844	0.179	-	-	-	-10.50	-10.12	-7.30	-7.119	-1

Mode: EHT160(80U) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.217	-5.793	-1.923	-4.227	-5.718	-1.898	-4.666	-6.053	-2.294	-10.07	-9.91	-6.98	-8.878	-1
	6185	47	-4.791	-5.126	-1.945	-4.505	-5.943	-2.154	-5.230	-5.814	-2.502	-10.07	-9.91	-6.98	-8.924	-1
	6345	79	-5.137	-5.906	-2.494	-5.428	-5.580	-2.493	-5.181	-6.245	-2.670	-10.07	-9.91	-6.98	-9.472	-1
UNII6	6505	111	-5.693	-5.345	-2.505	-5.440	-5.814	-2.612	-5.646	-5.908	-2.765	-10.38	-10.60	-7.48	-9.984	-1
UNII7	6665	143	-5.415	-5.245	-2.319	-5.364	-5.978	-2.650	-5.649	-5.998	-2.809	-10.38	-10.60	-7.48	-9.798	-1
UNII8	6825	175	-4.871	-6.265	-2.502	-5.338	-6.700	-2.955	-6.127	-6.899	-3.485	-10.50	-10.12	-7.30	-9.799	-1
	6985	207	-5.077	-6.102	-2.549	-5.351	-6.371	-2.821	-6.291	-6.536	-3.401	-10.50	-10.12	-7.30	-9.846	-1

Mode : EHT160(80U) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.769	-4.640	-1.172	-3.390	-4.985	-1.104	-3.348	-5.232	-1.178	-10.07	-9.91	-6.98	-8.083	-1
	6185	47	-4.030	-4.332	-1.168	-3.580	-4.100	-0.822	-3.927	-4.498	-1.192	-10.07	-9.91	-6.98	-7.801	-1
	6345	79	-4.285	-4.359	-1.311	-4.349	-4.262	-1.295	-4.650	-4.664	-1.646	-10.07	-9.91	-6.98	-8.274	-1
UNII6	6505	111	-5.322	-5.074	-2.186	-5.273	-4.601	-1.913	-5.413	-5.363	-2.377	-10.38	-10.60	-7.48	-9.392	-1
UNII7	6665	143	-5.268	-5.297	-2.272	-5.497	-5.438	-2.457	-5.461	-6.396	-2.893	-10.38	-10.60	-7.48	-9.751	-1
UNII8	6825	175	-5.683	-5.798	-2.729	-5.830	-5.883	-2.846	-6.195	-6.154	-3.164	-10.50	-10.12	-7.30	-10.027	-1
	6985	207	-5.489	-6.091	-2.769	-6.066	-6.042	-3.043	-6.491	-5.921	-3.186	-10.50	-10.12	-7.30	-10.066	-1

Mode: EHT160(80U) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.470	-6.583	-2.980	-5.294	-6.681	-2.922	-5.590	-7.139	-3.285	-10.07	-9.91	-6.98	-9.901	-1
	6185	47	-3.163	-3.260	-0.201	-3.349	-3.535	-0.430	-3.032	-3.368	-0.186	-10.07	-9.91	-6.98	-7.165	-1
	6345	79	-3.222	-3.137	-0.169	-3.726	-3.334	-0.515	-3.811	-3.334	-0.555	-10.07	-9.91	-6.98	-7.148	-1
UNII6	6505	111	-3.959	-4.209	-1.072	-4.070	-4.395	-1.219	-3.833	-4.652	-1.213	-10.38	-10.60	-7.48	-8.551	-1
UNII7	6665	143	-3.196	-4.803	-0.915	-3.348	-5.020	-1.093	-3.549	-4.830	-1.132	-10.38	-10.60	-7.48	-8.394	-1
UNII8	6825	175	-2.929	-3.330	-0.114	-3.457	-4.034	-0.725	-3.379	-3.941	-0.640	-10.50	-10.12	-7.30	-7.412	-1
	6985	207	-3.735	-3.651	-0.682	-3.740	-3.289	-0.498	-3.786	-3.262	-0.505	-10.50	-10.12	-7.30	-7.796	-1

Mode: EHT160(80U) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-2.041	-2.896	0.562	-1.636	-3.138	0.687	-1.960	-2.763	0.667	-10.07	-9.91	-6.98	-6.292	-1
	6185	47	-1.681	-2.627	0.882	-1.714	-2.131	1.092	-1.457	-2.194	1.200	-10.07	-9.91	-6.98	-5.779	-1
	6345	79	-1.616	-1.721	1.342	-2.032	-1.792	1.099	-2.216	-1.850	0.981	-10.07	-9.91	-6.98	-5.638	-1
UNII6	6505	111	-1.958	-2.331	0.869	-2.075	-2.398	0.776	-1.671	-2.316	1.028	-10.38	-10.60	-7.48	-6.451	-1
UNII7	6665	143	-2.011	-2.847	0.601	-1.991	-2.849	0.611	-1.996	-2.941	0.567	-10.38	-10.60	-7.48	-6.868	-1
UNII8	6825	175	-1.466	-2.251	1.169	-1.533	-1.950	1.273	-1.487	-2.120	1.218	-10.50	-10.12	-7.30	-6.024	-1
	6985	207	-1.799	-1.914	1.154	-1.659	-1.918	1.223	-1.940	-1.912	1.084	-10.50	-10.12	-7.30	-6.074	-1

Mode: EHT160(80U) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.060	-4.252	-0.605	-	-	-	-2.599	-4.088	-0.269	-10.07	-9.91	-6.98	-7.249	-1
	6185	47	-2.647	-3.033	0.175	-	-	-	-2.580	-3.078	0.189	-10.07	-9.91	-6.98	-6.791	-1
	6345	79	-2.553	-2.564	0.452	-	-	-	-3.077	-2.224	0.381	-10.07	-9.91	-6.98	-6.527	-1
UNII6	6505	111	-3.218	-3.469	-0.331	-	-	-	-2.857	-3.385	-0.102	-10.38	-10.60	-7.48	-7.581	-1
UNII7	6665	143	-2.785	-3.642	-0.182	-	-	-	-2.705	-3.830	-0.220	-10.38	-10.60	-7.48	-7.661	-1
UNII8	6825	175	-2.493	-2.793	0.370	-	-	-	-2.399	-2.940	0.350	-10.50	-10.12	-7.30	-6.927	-1
	6985	207	-2.576	-2.580	0.433	-	-	-	-2.935	-2.290	0.410	-10.50	-10.12	-7.30	-6.865	-1

Mode: EHT160(80U) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-3.089	-3.693	-0.370	-	-	-	-10.07	-9.91	-6.98	-7.350	-1
	6185	47	-	-	-	-3.078	-3.281	-0.168	-	-	-	-10.07	-9.91	-6.98	-7.147	-1
	6345	79	-	-	-	-2.865	-2.972	0.092	-	-	-	-10.07	-9.91	-6.98	-6.887	-1
UNII6	6505	111	-	-	-	-3.071	-2.915	0.018	-	-	-	-10.38	-10.60	-7.48	-7.461	-1
UNII7	6665	143	-	-	-	-2.730	-3.249	0.028	-	-	-	-10.38	-10.60	-7.48	-7.451	-1
UNII8	6825	175	-	-	-	-2.614	-3.044	0.187	-	-	-	-10.50	-10.12	-7.30	-7.111	-1
	6985	207	-	-	-	-2.893	-2.722	0.204	-	-	-	-10.50	-10.12	-7.30	-7.094	-1

Mode: EHT160 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-7.746	-8.617	-5.149	-	-	-	-10.07	-9.91	-6.98	-12.129	-1
	6185	47	-	-	-	-7.455	-7.579	-4.506	-	-	-	-10.07	-9.91	-6.98	-11.486	-1
	6345	79	-	-	-	-7.206	-7.853	-4.507	-	-	-	-10.07	-9.91	-6.98	-11.486	-1
UNII6	6505	111	-	-	-	-7.554	-7.099	-4.310	-	-	-	-10.38	-10.60	-7.48	-11.789	-1
UNII7	6665	143	-	-	-	-7.299	-7.303	-4.291	-	-	-	-10.38	-10.60	-7.48	-11.770	-1
UNII8	6825	175	-	-	-	-6.637	-7.299	-3.945	-	-	-	-10.50	-10.12	-7.30	-11.243	-1
	6985	207	-	-	-	-6.925	-7.208	-4.054	-	-	-	-10.50	-10.12	-7.30	-11.351	-1

Mode: EHT160 2x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-7.118	-8.292	-4.656	-	-	-	-10.07	-9.91	-6.98	-11.635	-1
	6185	47	-	-	-	-6.826	-7.122	-3.962	-	-	-	-10.07	-9.91	-6.98	-10.941	-1
	6345	79	-	-	-	-6.715	-7.179	-3.931	-	-	-	-10.07	-9.91	-6.98	-10.910	-1
UNII6	6505	111	-	-	-	-6.920	-6.617	-3.756	-	-	-	-10.38	-10.60	-7.48	-11.235	-1
UNII7	6665	143	-	-	-	-6.713	-7.057	-3.872	-	-	-	-10.38	-10.60	-7.48	-11.351	-1
UNII8	6825	175	-	-	-	-6.150	-7.058	-3.570	-	-	-	-10.50	-10.12	-7.30	-10.868	-1
	6985	207	-	-	-	-6.343	-6.772	-3.542	-	-	-	-10.50	-10.12	-7.30	-10.840	-1

Mode : EHT320(80LL) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.318	-7.227	-3.738	-5.360	-6.704	-2.970	-5.312	-6.067	-2.663	-10.07	-9.91	-6.98	-9.642	-1
	6265	63	-6.759	-6.162	-3.440	-6.346	-5.867	-3.089	-5.999	-5.342	-2.648	-10.07	-9.91	-6.98	-9.627	-1
UNII6	6425	95	-6.978	-6.153	-3.535	-6.079	-6.363	-3.208	-5.494	-6.022	-2.739	-10.38	-10.60	-7.48	-10.218	-1
	6585	127	-6.645	-7.514	-4.047	-6.647	-6.877	-3.750	-6.524	-6.414	-3.458	-10.38	-10.60	-7.48	-10.937	-1
UNII8	6745	159	-6.622	-7.224	-3.902	-6.612	-7.277	-3.921	-6.408	-6.199	-3.292	-10.50	-10.12	-7.30	-10.589	-1
	6905	191	-6.443	-7.519	-3.937	-6.365	-6.594	-3.467	-5.750	-6.577	-3.133	-10.50	-10.12	-7.30	-10.431	-1

Mode : EHT320(80LL) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.476	-5.890	-2.668	-5.455	-5.774	-2.601	-5.046	-5.787	-2.390	-10.07	-9.91	-6.98	-9.370	-1
	6265	63	-6.020	-5.931	-2.965	-5.602	-5.816	-2.697	-5.081	-5.204	-2.132	-10.07	-9.91	-6.98	-9.111	-1
UNII6	6425	95	-5.524	-5.632	-2.567	-5.748	-5.621	-2.674	-5.714	-5.168	-2.422	-10.38	-10.60	-7.48	-9.901	-1
	6585	127	-6.077	-5.447	-2.740	-5.278	-6.001	-2.614	-5.510	-5.535	-2.512	-10.38	-10.60	-7.48	-9.991	-1
UNII8	6745	159	-5.227	-6.233	-2.690	-5.254	-5.814	-2.514	-5.212	-5.442	-2.315	-10.50	-10.12	-7.30	-9.613	-1
	6905	191	-5.955	-6.685	-3.294	-5.779	-6.541	-3.133	-5.507	-6.432	-2.934	-10.50	-10.12	-7.30	-10.232	-1

Mode: EHT320(80LL) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.943	-3.887	-0.904	-3.581	-3.858	-0.707	-3.958	-3.744	-0.839	-10.07	-9.91	-6.98	-7.686	-1
	6265	63	-3.730	-5.076	-1.340	-3.419	-4.604	-0.961	-3.175	-4.595	-0.817	-10.07	-9.91	-6.98	-7.796	-1
UNII6	6425	95	-2.703	-4.657	-0.560	-2.639	-4.513	-0.465	-2.816	-4.272	-0.473	-10.38	-10.60	-7.48	-7.944	-1
	6585	127	-3.736	-3.464	-0.587	-3.450	-3.349	-0.389	-3.567	-3.543	-0.544	-10.38	-10.60	-7.48	-7.868	-1
UNII8	6745	159	-3.560	-3.330	-0.433	-3.362	-3.705	-0.519	-3.423	-3.812	-0.602	-10.50	-10.12	-7.30	-7.730	-1
	6905	191	-3.015	-3.590	-0.282	-3.254	-3.648	-0.436	-3.196	-3.443	-0.307	-10.50	-10.12	-7.30	-7.580	-1

Mode: EHT320(80LL) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-2.728	-2.765	0.263	-2.705	-3.061	0.131	-2.465	-3.445	0.082	-10.07	-9.91	-6.98	-6.716	-1
	6265	63	-1.944	-2.595	0.753	-1.824	-2.366	0.923	-1.489	-2.583	1.008	-10.07	-9.91	-6.98	-5.971	-1
UNII6	6425	95	-1.654	-2.957	0.753	-1.670	-2.753	0.832	-1.860	-2.663	0.767	-10.38	-10.60	-7.48	-6.647	-1
	6585	127	-2.075	-1.430	1.269	-2.130	-1.510	1.201	-2.269	-1.296	1.255	-10.38	-10.60	-7.48	-6.210	-1
UNII8	6745	159	-1.653	-1.486	1.441	-1.725	-1.484	1.407	-1.711	-1.983	1.165	-10.50	-10.12	-7.30	-5.856	-1
	6905	191	-1.032	-1.779	1.620	-1.337	-1.839	1.429	-1.002	-1.704	1.671	-10.50	-10.12	-7.30	-5.627	-1

Mode: EHT320(80LL) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.583	-3.867	-0.712	-	-	-	-3.314	-3.799	-0.540	-10.07	-9.91	-6.98	-7.519	-1
	6265	63	-2.444	-3.401	0.114	-	-	-	-2.058	-3.338	0.359	-10.07	-9.91	-6.98	-6.620	-1
UNII6	6425	95	-2.096	-3.894	0.108	-	-	-	-2.324	-3.956	-0.054	-10.38	-10.60	-7.48	-7.371	-1
	6585	127	-2.878	-2.368	0.395	-	-	-	-2.779	-1.793	0.752	-10.38	-10.60	-7.48	-6.727	-1
UNII8	6745	159	-2.110	-2.636	0.645	-	-	-	-2.422	-3.027	0.296	-10.50	-10.12	-7.30	-6.652	-1
	6905	191	-2.445	-2.800	0.391	-	-	-	-2.447	-2.790	0.395	-10.50	-10.12	-7.30	-6.903	-1

Mode: EHT320(80LL) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.671	-4.445	-1.031	-	-	-	-10.07	-9.91	-6.98	-8.010	-1
	6265	63	-	-	-	-2.324	-3.546	0.118	-	-	-	-10.07	-9.91	-6.98	-6.861	-1
UNII6	6425	95	-	-	-	-2.204	-3.347	0.272	-	-	-	-10.38	-10.60	-7.48	-7.207	-1
	6585	127	-	-	-	-3.122	-2.563	0.177	-	-	-	-10.38	-10.60	-7.48	-7.302	-1
UNII8	6745	159	-	-	-	-2.689	-2.205	0.570	-	-	-	-10.50	-10.12	-7.30	-6.728	-1
	6905	191	-	-	-	-2.317	-2.957	0.385	-	-	-	-10.50	-10.12	-7.30	-6.913	-1

Mode: EHT320(80LM) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.349	-6.045	-2.673	-4.083	-5.911	-1.891	-3.673	-4.339	-0.983	-10.07	-9.91	-6.98	-7.962	-1
	6265	63	-5.279	-5.523	-2.389	-5.026	-5.695	-2.337	-3.743	-4.273	-0.989	-10.07	-9.91	-6.98	-7.969	-1
UNII6	6425	95	-6.064	-6.396	-3.216	-4.857	-5.263	-2.045	-4.944	-4.307	-1.603	-10.38	-10.60	-7.48	-9.082	-1
	6585	127	-6.016	-6.686	-3.328	-5.023	-6.282	-2.597	-4.500	-5.150	-1.802	-10.38	-10.60	-7.48	-9.281	-1
UNII8	6745	159	-5.578	-6.330	-2.927	-4.885	-6.050	-2.418	-4.523	-5.117	-1.799	-10.50	-10.12	-7.30	-9.097	-1
	6905	191	-5.847	-6.965	-3.360	-4.953	-6.798	-2.768	-4.615	-5.450	-2.002	-10.50	-10.12	-7.30	-9.300	-1

Mode: EHT320(80LM) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.375	-5.835	-2.588	-3.725	-4.833	-1.233	-2.720	-4.297	-0.427	-10.07	-9.91	-6.98	-7.406	-1
	6265	63	-5.051	-5.778	-2.389	-4.331	-4.606	-1.456	-3.058	-3.183	-0.110	-10.07	-9.91	-6.98	-7.089	-1
UNII6	6425	95	-4.843	-5.053	-1.936	-4.107	-4.072	-1.079	-3.573	-3.715	-0.633	-10.38	-10.60	-7.48	-8.112	-1
	6585	127	-5.338	-5.689	-2.499	-4.661	-4.844	-1.741	-4.524	-4.347	-1.424	-10.38	-10.60	-7.48	-8.903	-1
UNII8	6745	159	-4.941	-6.107	-2.474	-3.977	-5.171	-1.523	-3.826	-4.450	-1.116	-10.50	-10.12	-7.30	-8.414	-1
	6905	191	-5.403	-6.246	-2.794	-4.924	-5.240	-2.069	-4.225	-5.065	-1.614	-10.50	-10.12	-7.30	-8.912	-1

Mode : EHT320(80LM) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.752	-3.769	-0.750	-2.970	-3.220	-0.083	-3.001	-3.555	-0.259	-10.07	-9.91	-6.98	-7.062	-1
	6265	63	-3.184	-4.521	-0.791	-3.510	-4.272	-0.864	-2.680	-4.164	-0.348	-10.07	-9.91	-6.98	-7.328	-1
UNII6	6425	95	-2.725	-4.631	-0.564	-3.240	-4.212	-0.688	-2.994	-4.456	-0.653	-10.38	-10.60	-7.48	-8.043	-1
	6585	127	-3.879	-3.412	-0.629	-3.585	-3.381	-0.471	-3.541	-3.888	-0.700	-10.38	-10.60	-7.48	-7.950	-1
UNII8	6745	159	-2.877	-3.574	-0.201	-3.238	-3.895	-0.543	-3.292	-4.023	-0.631	-10.50	-10.12	-7.30	-7.498	-1
	6905	191	-3.267	-3.712	-0.473	-3.379	-3.768	-0.558	-3.610	-3.784	-0.685	-10.50	-10.12	-7.30	-7.771	-1

Mode : EHT320(80LM) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-2.272	-2.666	0.545	-2.481	-2.885	0.332	-2.018	-2.657	0.684	-10.07	-9.91	-6.98	-6.295	-1
	6265	63	-1.615	-2.198	1.113	-1.717	-2.171	1.072	-1.354	-2.066	1.314	-10.07	-9.91	-6.98	-5.665	-1
UNII6	6425	95	-1.805	-2.798	0.737	-1.937	-2.862	0.635	-1.871	-2.835	0.684	-10.38	-10.60	-7.48	-6.742	-1
	6585	127	-2.532	-1.528	1.009	-2.328	-1.425	1.157	-2.156	-1.702	1.087	-10.38	-10.60	-7.48	-6.322	-1
UNII8	6745	159	-1.789	-1.805	1.213	-1.905	-2.053	1.032	-1.724	-1.982	1.159	-10.50	-10.12	-7.30	-6.085	-1
	6905	191	-1.244	-1.489	1.645	-1.450	-1.998	1.295	-1.636	-1.857	1.265	-10.50	-10.12	-7.30	-5.652	-1

Mode : EHT320(80LM) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.133	-3.389	-0.249	-	-	-	-2.727	-3.388	-0.035	-10.07	-9.91	-6.98	-7.014	-1
	6265	63	-1.930	-2.921	0.613	-	-	-	-1.896	-2.630	0.763	-10.07	-9.91	-6.98	-6.217	-1
UNII6	6425	95	-2.212	-3.471	0.214	-	-	-	-2.592	-3.732	-0.114	-10.38	-10.60	-7.48	-7.265	-1
	6585	127	-2.665	-2.497	0.430	-	-	-	-2.802	-2.354	0.438	-10.38	-10.60	-7.48	-7.041	-1
UNII8	6745	159	-2.795	-3.124	0.054	-	-	-	-2.571	-3.087	0.189	-10.50	-10.12	-7.30	-7.109	-1
	6905	191	-2.529	-2.984	0.260	-	-	-	-2.594	-2.579	0.424	-10.50	-10.12	-7.30	-6.874	-1

Mode : EHT320(80LM) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-2.856	-3.691	-0.243	-	-	-	-10.07	-9.91	-6.98	-7.223	-1
	6265	63	-	-	-	-2.010	-2.459	0.782	-	-	-	-10.07	-9.91	-6.98	-6.198	-1
UNII6	6425	95	-	-	-	-2.423	-3.060	0.280	-	-	-	-10.38	-10.60	-7.48	-7.199	-1
	6585	127	-	-	-	-2.595	-1.967	0.741	-	-	-	-10.38	-10.60	-7.48	-6.738	-1
UNII8	6745	159	-	-	-	-2.318	-1.949	0.881	-	-	-	-10.50	-10.12	-7.30	-6.417	-1
	6905	191	-	-	-	-2.663	-2.712	0.323	-	-	-	-10.50	-10.12	-7.30	-6.975	-1

Mode: EHT320(80MH) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.762	-4.780	-1.231	-4.463	-6.233	-2.248	-5.076	-6.161	-2.574	-10.07	-9.91	-6.98	-8.210	-1
	6265	63	-3.983	-4.839	-1.379	-4.793	-5.429	-2.089	-6.410	-6.739	-3.561	-10.07	-9.91	-6.98	-8.359	-1
UNII6	6425	95	-4.375	-4.697	-1.523	-5.535	-5.141	-2.323	-6.711	-6.157	-3.415	-10.38	-10.60	-7.48	-9.002	-1
	6585	127	-4.162	-4.641	-1.384	-5.294	-6.252	-2.736	-5.632	-6.313	-2.949	-10.38	-10.60	-7.48	-8.863	-1
UNII8	6745	159	-4.298	-5.165	-1.699	-4.905	-6.029	-2.420	-5.470	-6.864	-3.101	-10.50	-10.12	-7.30	-8.997	-1
	6905	191	-4.587	-6.086	-2.262	-5.647	-7.038	-3.277	-6.537	-7.225	-3.857	-10.50	-10.12	-7.30	-9.559	-1

Mode: EHT320(80MH) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.254	-3.731	-0.475	-3.826	-4.467	-1.124	-4.376	-5.803	-2.021	-10.07	-9.91	-6.98	-7.455	-1
	6265	63	-3.496	-3.582	-0.528	-4.297	-4.291	-1.283	-4.902	-4.542	-1.708	-10.07	-9.91	-6.98	-7.508	-1
UNII6	6425	95	-3.955	-3.420	-0.669	-4.632	-4.622	-1.616	-5.689	-5.208	-2.431	-10.38	-10.60	-7.48	-8.148	-1
	6585	127	-4.075	-4.014	-1.034	-5.339	-5.320	-2.319	-6.046	-5.934	-2.979	-10.38	-10.60	-7.48	-8.513	-1
UNII8	6745	159	-3.575	-4.726	-1.102	-4.653	-4.936	-1.782	-5.599	-6.019	-2.793	-10.50	-10.12	-7.30	-8.400	-1
	6905	191	-4.723	-4.771	-1.736	-5.833	-5.589	-2.699	-6.768	-6.353	-3.545	-10.50	-10.12	-7.30	-9.034	-1

Mode: EHT320(80MH) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-2.969	-2.936	0.058	-3.201	-3.008	-0.093	-2.838	-2.993	0.096	-10.07	-9.91	-6.98	-6.883	-1
	6265	63	-2.790	-4.235	-0.442	-3.349	-3.755	-0.537	-3.341	-4.113	-0.699	-10.07	-9.91	-6.98	-7.421	-1
UNII6	6425	95	-2.559	-4.249	-0.312	-2.928	-4.514	-0.638	-3.465	-4.436	-0.913	-10.38	-10.60	-7.48	-7.791	-1
	6585	127	-3.679	-3.642	-0.650	-3.680	-3.556	-0.607	-3.912	-3.963	-0.927	-10.38	-10.60	-7.48	-8.086	-1
UNII8	6745	159	-3.289	-3.977	-0.609	-3.158	-4.166	-0.622	-3.562	-4.324	-0.916	-10.50	-10.12	-7.30	-7.906	-1
	6905	191	-3.195	-3.492	-0.330	-3.650	-3.614	-0.621	-3.617	-3.673	-0.634	-10.50	-10.12	-7.30	-7.628	-1

Mode: EHT320(80MH) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-1.948	-2.488	0.800	-2.113	-2.711	0.608	-1.682	-2.024	1.160	-10.07	-9.91	-6.98	-5.819	-1
	6265	63	-1.490	-1.798	1.369	-1.921	-2.163	0.970	-1.805	-1.941	1.137	-10.07	-9.91	-6.98	-5.611	-1
UNII6	6425	95	-2.094	-3.013	0.481	-1.774	-2.986	0.672	-2.098	-3.041	0.466	-10.38	-10.60	-7.48	-6.807	-1
	6585	127	-2.352	-1.901	0.889	-2.137	-1.797	1.046	-2.311	-1.950	0.883	-10.38	-10.60	-7.48	-6.433	-1
UNII8	6745	159	-1.708	-2.219	1.054	-1.777	-2.191	1.031	-1.701	-1.979	1.172	-10.50	-10.12	-7.30	-6.126	-1
	6905	191	-1.535	-2.263	1.126	-1.475	-2.235	1.171	-1.771	-2.381	0.945	-10.50	-10.12	-7.30	-6.126	-1

Mode : EHT320(80MH) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.056	-3.552	-0.287	-	-	-	-2.826	-3.140	0.030	-10.07	-9.91	-6.98	-6.949	-1
	6265	63	-2.334	-2.820	0.440	-	-	-	-2.427	-3.078	0.270	-10.07	-9.91	-6.98	-6.539	-1
UNII6	6425	95	-2.088	-4.092	0.035	-	-	-	-2.111	-3.772	0.148	-10.38	-10.60	-7.48	-7.331	-1
	6585	127	-2.419	-2.351	0.625	-	-	-	-2.651	-2.570	0.400	-10.38	-10.60	-7.48	-6.854	-1
UNII8	6745	159	-2.058	-3.349	0.355	-	-	-	-2.079	-3.432	0.307	-10.50	-10.12	-7.30	-6.943	-1
	6905	191	-2.343	-2.616	0.533	-	-	-	-2.252	-2.799	0.493	-10.50	-10.12	-7.30	-6.765	-1

Mode : EHT320(80MH) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.007	-3.290	-0.136	-	-	-	-10.07	-9.91	-6.98	-7.115	-1
	6265	63	-	-	-	-1.810	-2.371	0.929	-	-	-	-10.07	-9.91	-6.98	-6.051	-1
UNII6	6425	95	-	-	-	-2.184	-2.836	0.512	-	-	-	-10.38	-10.60	-7.48	-6.967	-1
	6585	127	-	-	-	-2.282	-2.271	0.734	-	-	-	-10.38	-10.60	-7.48	-6.745	-1
UNII8	6745	159	-	-	-	-2.072	-2.130	0.909	-	-	-	-10.50	-10.12	-7.30	-6.388	-1
	6905	191	-	-	-	-2.114	-2.824	0.556	-	-	-	-10.50	-10.12	-7.30	-6.742	-1

Mode: EHT320(80HH) 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.484	-6.983	-2.546	-5.161	-7.107	-3.015	-5.208	-7.463	-3.180	-10.07	-9.91	-6.98	-9.525	-1
	6265	63	-5.634	-6.920	-3.219	-6.479	-7.692	-4.033	-6.021	-7.728	-3.781	-10.07	-9.91	-6.98	-10.198	-1
UNII6	6425	95	-7.006	-5.858	-3.384	-6.227	-6.178	-3.192	-6.804	-6.568	-3.674	-10.38	-10.60	-7.48	-10.671	-1
	6585	127	-5.536	-6.266	-2.875	-6.785	-6.698	-3.731	-6.310	-7.607	-3.900	-10.38	-10.60	-7.48	-10.354	-1
UNII8	6745	159	-5.906	-7.008	-3.412	-6.127	-7.253	-3.643	-6.158	-7.984	-3.965	-10.50	-10.12	-7.30	-10.709	-1
	6905	191	-6.248	-7.372	-3.763	-6.824	-7.901	-4.319	-7.347	-8.282	-4.779	-10.50	-10.12	-7.30	-11.061	-1

Mode: EHT320(80HH) 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.254	-5.187	-1.685	-4.130	-5.779	-1.866	-4.203	-5.954	-1.980	-10.07	-9.91	-6.98	-8.664	-1
	6265	63	-5.264	-4.671	-1.947	-5.618	-5.462	-2.529	-5.587	-6.146	-2.847	-10.07	-9.91	-6.98	-8.926	-1
UNII6	6425	95	-5.749	-5.254	-2.484	-5.964	-5.466	-2.697	-6.154	-6.322	-3.227	-10.38	-10.60	-7.48	-9.963	-1
	6585	127	-6.237	-6.217	-3.216	-6.760	-6.534	-3.635	-7.226	-7.021	-4.112	-10.38	-10.60	-7.48	-10.695	-1
UNII8	6745	159	-5.537	-6.068	-2.784	-6.177	-6.203	-3.179	-7.030	-6.576	-3.787	-10.50	-10.12	-7.30	-10.081	-1
	6905	191	-7.011	-6.182	-3.566	-7.184	-6.172	-3.638	-7.842	-6.619	-4.177	-10.50	-10.12	-7.30	-10.864	-1

Mode : EHT320(80HH) 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-2.992	-2.969	0.030	-2.813	-3.296	-0.037	-2.864	-3.301	-0.066	-10.07	-9.91	-6.98	-6.949	-1
	6265	63	-3.502	-4.138	-0.798	-3.336	-3.923	-0.609	-3.534	-4.410	-0.939	-10.07	-9.91	-6.98	-7.588	-1
UNII6	6425	95	-2.953	-4.552	-0.669	-3.058	-4.440	-0.684	-3.119	-4.449	-0.723	-10.38	-10.60	-7.48	-8.148	-1
	6585	127	-3.342	-4.296	-0.782	-3.652	-3.886	-0.757	-3.522	-4.639	-1.034	-10.38	-10.60	-7.48	-8.236	-1
UNII8	6745	159	-3.344	-3.981	-0.640	-3.372	-4.422	-0.855	-3.349	-4.480	-0.867	-10.50	-10.12	-7.30	-7.938	-1
	6905	191	-3.459	-4.101	-0.757	-3.921	-3.490	-0.689	-4.224	-3.576	-0.877	-10.50	-10.12	-7.30	-7.987	-1

Mode : EHT320(80HH) 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-2.058	-2.554	0.711	-1.868	-2.369	0.899	-1.645	-2.306	1.047	-10.07	-9.91	-6.98	-5.932	-1
	6265	63	-1.372	-2.332	1.184	-1.606	-2.256	1.091	-2.151	-2.561	0.659	-10.07	-9.91	-6.98	-5.795	-1
UNII6	6425	95	-2.013	-3.121	0.478	-2.058	-3.257	0.394	-1.752	-3.287	0.558	-10.38	-10.60	-7.48	-6.921	-1
	6585	127	-2.109	-1.613	1.156	-2.106	-1.818	1.050	-2.070	-2.363	0.796	-10.38	-10.60	-7.48	-6.323	-1
UNII8	6745	159	-1.681	-2.473	0.951	-1.707	-2.220	1.054	-1.763	-2.603	0.847	-10.50	-10.12	-7.30	-6.244	-1
	6905	191	-1.704	-2.015	1.153	-1.906	-1.974	1.070	-1.836	-1.767	1.209	-10.50	-10.12	-7.30	-6.089	-1

Mode : EHT320(80HH) 484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.067	-3.492	-0.264	-	-	-	-3.039	-3.485	-0.246	-10.07	-9.91	-6.98	-7.225	-1
	6265	63	-2.555	-2.910	0.281	-	-	-	-2.773	-3.108	0.073	-10.07	-9.91	-6.98	-6.698	-1
UNII6	6425	95	-2.668	-4.266	-0.384	-	-	-	-2.436	-4.124	-0.188	-10.38	-10.60	-7.48	-7.667	-1
	6585	127	-2.322	-3.189	0.276	-	-	-	-2.675	-3.178	0.091	-10.38	-10.60	-7.48	-7.203	-1
UNII8	6745	159	-2.430	-3.831	-0.064	-	-	-	-2.583	-3.942	-0.199	-10.50	-10.12	-7.30	-7.362	-1
	6905	191	-2.879	-3.090	0.027	-	-	-	-3.013	-2.773	0.119	-10.50	-10.12	-7.30	-7.179	-1

Mode : EHT320(80HH) 996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.112	-3.781	-0.423	-	-	-	-10.07	-9.91	-6.98	-7.403	-1
	6265	63	-	-	-	-2.630	-3.061	0.170	-	-	-	-10.07	-9.91	-6.98	-6.809	-1
UNII6	6425	95	-	-	-	-2.408	-3.660	0.021	-	-	-	-10.38	-10.60	-7.48	-7.458	-1
	6585	127	-	-	-	-2.586	-2.929	0.256	-	-	-	-10.38	-10.60	-7.48	-7.223	-1
UNII8	6745	159	-	-	-	-2.416	-2.563	0.521	-	-	-	-10.50	-10.12	-7.30	-6.776	-1
	6905	191	-	-	-	-3.119	-3.097	-0.098	-	-	-	-10.50	-10.12	-7.30	-7.395	-1

Mode : EHT320(160L) 2x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-7.027	-7.906	-4.434	-	-	-	-10.07	-9.91	-6.98	-11.413	-1
	6265	63	-	-	-	-6.053	-7.440	-3.681	-	-	-	-10.07	-9.91	-6.98	-10.660	-1
UNII6	6425	95	-	-	-	-6.714	-8.375	-4.455	-	-	-	-10.38	-10.60	-7.48	-11.934	-1
	6585	127	-	-	-	-7.025	-6.784	-3.892	-	-	-	-10.38	-10.60	-7.48	-11.371	-1
UNII8	6745	159	-	-	-	-6.837	-6.453	-3.630	-	-	-	-10.50	-10.12	-7.30	-10.928	-1
	6905	191	-	-	-	-7.240	-7.447	-4.332	-	-	-	-10.50	-10.12	-7.30	-11.629	-1

Mode: EHT320(160U) 2x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-7.255	-7.619	-4.423	-	-	-	-10.07	-9.91	-6.98	-11.402	-1
	6265	63	-	-	-	-6.490	-7.312	-3.871	-	-	-	-10.07	-9.91	-6.98	-10.850	-1
UNII6	6425	95	-	-	-	-6.647	-8.427	-4.436	-	-	-	-10.38	-10.60	-7.48	-11.915	-1
	6585	127	-	-	-	-6.658	-7.026	-3.828	-	-	-	-10.38	-10.60	-7.48	-11.307	-1
UNII8	6745	159	-	-	-	-6.438	-7.009	-3.704	-	-	-	-10.50	-10.12	-7.30	-11.001	-1
	6905	191	-	-	-	-6.494	-7.552	-3.980	-	-	-	-10.50	-10.12	-7.30	-11.278	-1

Mode : EHT320 4x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-10.403	-10.874	-7.622	-	-	-	-10.07	-9.91	-6.98	-14.601	-1
	6265	63	-	-	-	-9.589	-10.626	-7.066	-	-	-	-10.07	-9.91	-6.98	-14.045	-1
UNII6	6425	95	-	-	-	-10.118	-11.689	-7.822	-	-	-	-10.38	-10.60	-7.48	-15.301	-1
	6585	127	-	-	-	-10.088	-10.101	-7.084	-	-	-	-10.38	-10.60	-7.48	-14.563	-1
UNII8	6745	159	-	-	-	-9.500	-9.957	-6.712	-	-	-	-10.50	-10.12	-7.30	-14.010	-1
	6905	191	-	-	-	-10.110	-10.617	-7.346	-	-	-	-10.50	-10.12	-7.30	-14.643	-1

Mode: EHT320 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-9.364	-10.015	-6.667	-	-	-	-10.07	-9.91	-6.98	-13.646	-1
	6265	63	-	-	-	-8.764	-9.500	-6.106	-	-	-	-10.07	-9.91	-6.98	-13.085	-1
UNII6	6425	95	-	-	-	-8.957	-10.599	-6.690	-	-	-	-10.38	-10.60	-7.48	-14.169	-1
	6585	127	-	-	-	-9.139	-9.171	-6.144	-	-	-	-10.38	-10.60	-7.48	-13.623	-1
UNII8	6745	159	-	-	-	-8.942	-8.934	-5.927	-	-	-	-10.50	-10.12	-7.30	-13.225	-1
	6905	191	-	-	-	-9.128	-9.635	-6.364	-	-	-	-10.50	-10.12	-7.30	-13.661	-1

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-2.658	-2.834	0.266	-	-	-	-10.07	-9.91	-6.98	-6.714	-1
	6175	45	-	-	-	-0.956	-1.852	1.630	-	-	-	-10.07	-9.91	-6.98	-5.349	-1
	6415	93	-	-	-	-1.378	-1.740	1.456	-	-	-	-10.07	-9.91	-6.98	-5.524	-1
UNII6	6435	97	-	-	-	-1.270	-2.404	1.211	-	-	-	-10.38	-10.60	-7.48	-6.268	-1
	6475	105	-	-	-	-1.817	-1.821	1.192	-	-	-	-10.38	-10.60	-7.48	-6.287	-1
	6515	113	-	-	-	-1.383	-1.804	1.422	-	-	-	-10.38	-10.60	-7.48	-6.057	-1
UNII7	6535	117	-	-	-	-1.426	-1.782	1.410	-	-	-	-10.38	-10.60	-7.48	-6.069	-1
	6695	149	-	-	-	-1.202	-1.334	1.743	-	-	-	-10.38	-10.60	-7.48	-5.736	-1
	6855	181	-	-	-	-0.959	-1.463	1.807	-	-	-	-10.38	-10.60	-7.48	-5.672	-1
UNII8	6875	185	-	-	-	-1.496	-1.626	1.450	-	-	-	-10.50	-10.12	-7.30	-5.847	-1
	6995	209	-	-	-	-0.928	-1.200	1.949	-	-	-	-10.50	-10.12	-7.30	-5.349	-1
	7115	233	-	-	-	-4.368	-4.714	-1.527	-	-	-	-10.50	-10.12	-7.30	-8.824	-1

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-4.609	-6.232	-2.335	-4.682	-6.199	-2.364	-4.797	-6.399	-2.514	-10.07	-9.91	-6.98	-9.314	-1
	6175	45	-5.425	-6.139	-2.757	-5.266	-6.088	-2.647	-5.084	-6.031	-2.521	-10.07	-9.91	-6.98	-9.501	-1
	6415	93	-6.232	-5.766	-2.982	-6.109	-6.043	-3.066	-6.020	-5.695	-2.844	-10.07	-9.91	-6.98	-9.824	-1
UNII6	6435	97	-6.082	-5.895	-2.977	-6.138	-5.839	-2.976	-6.195	-5.755	-2.959	-10.38	-10.60	-7.48	-10.438	-1
	6475	105	-6.193	-5.658	-2.907	-6.064	-5.760	-2.899	-6.174	-5.719	-2.930	-10.38	-10.60	-7.48	-10.378	-1
	6515	113	-6.666	-6.326	-3.482	-6.660	-6.662	-3.651	-6.700	-6.516	-3.597	-10.38	-10.60	-7.48	-10.961	-1
UNII7	6535	117	-6.557	-6.222	-3.376	-6.558	-6.370	-3.453	-6.583	-6.160	-3.356	-10.38	-10.60	-7.48	-10.835	-1
	6695	149	-6.139	-6.397	-3.256	-6.384	-6.515	-3.439	-6.235	-6.537	-3.373	-10.38	-10.60	-7.48	-10.735	-1
	6855	181	-6.385	-7.545	-3.916	-6.590	-7.622	-4.065	-6.639	-7.426	-4.004	-10.38	-10.60	-7.48	-11.395	-1
UNII8	6875	185	-6.839	-7.573	-4.180	-6.658	-7.606	-4.096	-6.680	-7.379	-4.005	-10.50	-10.12	-7.30	-11.303	-1
	6995	209	-7.003	-7.631	-4.295	-7.073	-7.576	-4.307	-7.006	-7.374	-4.176	-10.50	-10.12	-7.30	-11.473	-1
	7115	233	-5.097	-6.974	-2.925	-5.219	-6.926	-2.979	-5.198	-6.758	-2.898	-10.50	-10.12	-7.30	-10.196	-1

Mode: EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-4.593	-4.876	-1.722	-	-	-	-4.588	-4.661	-1.614	-10.07	-9.91	-6.98	-8.593	-1
	6175	45	-3.556	-3.424	-0.479	-	-	-	-3.530	-3.964	-0.731	-10.07	-9.91	-6.98	-7.458	-1
	6415	93	-3.337	-3.557	-0.435	-	-	-	-3.336	-3.663	-0.486	-10.07	-9.91	-6.98	-7.414	-1
UNII6	6435	97	-3.310	-4.693	-0.936	-	-	-	-3.242	-4.707	-0.902	-10.38	-10.60	-7.48	-8.381	-1
	6475	105	-3.879	-5.207	-1.482	-	-	-	-4.048	-5.138	-1.548	-10.38	-10.60	-7.48	-8.961	-1
	6515	113	-4.201	-4.575	-1.373	-	-	-	-4.308	-4.531	-1.407	-10.38	-10.60	-7.48	-8.852	-1
UNII7	6535	117	-4.316	-4.954	-1.613	-	-	-	-4.271	-4.917	-1.571	-10.38	-10.60	-7.48	-9.050	-1
	6695	149	-3.757	-4.024	-0.878	-	-	-	-3.945	-4.217	-1.068	-10.38	-10.60	-7.48	-8.357	-1
	6855	181	-3.364	-4.211	-0.756	-	-	-	-3.738	-4.100	-0.905	-10.38	-10.60	-7.48	-8.235	-1
UNII8	6875	185	-3.934	-3.993	-0.953	-	-	-	-3.954	-4.095	-1.013	-10.50	-10.12	-7.30	-8.250	-1
	6995	209	-3.554	-4.040	-0.780	-	-	-	-3.759	-3.979	-0.857	-10.50	-10.12	-7.30	-8.077	-1
	7115	233	-4.082	-4.588	-1.317	-	-	-	-3.705	-4.255	-0.961	-10.50	-10.12	-7.30	-8.258	-1

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-4.522	-6.213	-2.276	-4.815	-6.147	-2.420	-4.639	-6.510	-2.464	-10.07	-9.91	-6.98	-9.255	-1
	6165	43	-5.158	-5.921	-2.513	-5.255	-6.027	-2.614	-5.171	-5.640	-2.389	-10.07	-9.91	-6.98	-9.368	-1
	6405	91	-5.867	-5.804	-2.825	-6.298	-5.938	-3.104	-6.065	-5.699	-2.868	-10.07	-9.91	-6.98	-9.805	-1
UNII6	6445	99	-5.831	-5.944	-2.877	-6.113	-5.930	-3.010	-6.032	-5.863	-2.937	-10.38	-10.60	-7.48	-10.356	-1
	6485	107	-5.953	-5.370	-2.642	-6.219	-5.907	-3.050	-6.116	-5.720	-2.903	-10.38	-10.60	-7.48	-10.121	-1
	6525	115	-6.591	-6.396	-3.482	-6.740	-6.575	-3.647	-6.479	-6.296	-3.376	-10.38	-10.60	-7.48	-10.855	-1
UNII7	6565	123	-6.738	-6.850	-3.784	-7.119	-6.841	-3.968	-6.759	-6.892	-3.815	-10.38	-10.60	-7.48	-11.263	-1
	6685	147	-6.221	-6.451	-3.324	-6.434	-6.455	-3.434	-6.559	-6.384	-3.461	-10.38	-10.60	-7.48	-10.803	-1
	6845	179	-6.265	-7.308	-3.745	-6.147	-7.638	-3.819	-6.289	-7.542	-3.860	-10.38	-10.60	-7.48	-11.224	-1
UNII8	6885	187	-6.405	-7.431	-3.878	-6.646	-7.243	-3.924	-6.749	-7.293	-4.002	-10.50	-10.12	-7.30	-11.175	-1
	7005	211	-6.628	-6.567	-3.587	-6.881	-7.240	-4.047	-6.776	-6.534	-3.643	-10.50	-10.12	-7.30	-10.885	-1
	7085	227	-4.982	-6.937	-2.840	-4.854	-6.966	-2.773	-5.085	-6.872	-2.877	-10.50	-10.12	-7.30	-10.070	-1

Mode: EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-4.187	-5.437	-1.757	-4.670	-5.423	-2.020	-4.481	-5.815	-2.087	-10.07	-9.91	-6.98	-8.736	-1
	6165	43	-3.619	-4.081	-0.834	-4.035	-3.914	-0.964	-3.711	-3.940	-0.814	-10.07	-9.91	-6.98	-7.793	-1
	6405	91	-4.006	-3.995	-0.990	-4.018	-3.848	-0.922	-3.858	-3.863	-0.850	-10.07	-9.91	-6.98	-7.830	-1
UNII6	6445	99	-3.332	-4.570	-0.897	-3.461	-5.132	-1.207	-3.386	-4.976	-1.099	-10.38	-10.60	-7.48	-8.376	-1
	6485	107	-4.154	-4.974	-1.535	-4.364	-5.098	-1.705	-4.166	-4.755	-1.440	-10.38	-10.60	-7.48	-8.919	-1
	6525	115	-4.347	-4.872	-1.591	-4.520	-4.747	-1.622	-4.375	-5.088	-1.707	-10.38	-10.60	-7.48	-9.070	-1
UNII7	6565	123	-4.085	-4.129	-1.097	-4.174	-4.396	-1.273	-4.167	-4.180	-1.163	-10.38	-10.60	-7.48	-8.576	-1
	6685	147	-4.048	-4.151	-1.089	-4.098	-4.331	-1.203	-4.109	-4.265	-1.176	-10.38	-10.60	-7.48	-8.568	-1
	6845	179	-3.972	-4.349	-1.146	-3.728	-4.539	-1.105	-3.637	-4.488	-1.032	-10.38	-10.60	-7.48	-8.511	-1
UNII8	6885	187	-4.075	-4.311	-1.181	-3.924	-4.505	-1.195	-4.012	-4.199	-1.094	-10.50	-10.12	-7.30	-8.392	-1
	7005	211	-3.739	-4.261	-0.982	-3.993	-4.351	-1.158	-3.763	-4.297	-1.012	-10.50	-10.12	-7.30	-8.280	-1
	7085	227	-4.051	-4.244	-1.136	-4.445	-4.412	-1.418	-3.971	-4.052	-1.001	-10.50	-10.12	-7.30	-8.299	-1

Mode : EHT80 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-5.002	-6.151	-2.528	-4.784	-6.786	-2.660	-4.758	-6.259	-2.433	-10.07	-9.91	-6.98	-9.413	-1
	6145	39	-5.442	-6.640	-2.989	-5.887	-6.686	-3.258	-5.308	-6.502	-2.854	-10.07	-9.91	-6.98	-9.833	-1
	6385	87	-6.627	-6.176	-3.385	-6.242	-6.217	-3.219	-6.374	-6.183	-3.267	-10.07	-9.91	-6.98	-10.198	-1
UNII6	6465	103	-6.504	-5.771	-3.111	-6.452	-6.277	-3.353	-6.293	-5.869	-3.065	-10.38	-10.60	-7.48	-10.544	-1
	6545	119	-6.365	-6.303	-3.323	-6.536	-6.278	-3.395	-7.134	-6.366	-3.722	-10.38	-10.60	-7.48	-10.802	-1
UNII7	6625	135	-7.158	-6.985	-4.060	-7.406	-7.174	-4.278	-7.044	-7.100	-4.061	-10.38	-10.60	-7.48	-11.539	-1
	6705	151	-6.665	-6.914	-3.777	-7.136	-6.673	-3.888	-7.137	-6.727	-3.917	-10.38	-10.60	-7.48	-11.256	-1
	6785	167	-6.477	-7.486	-3.942	-7.043	-7.574	-4.290	-7.138	-7.437	-4.274	-10.38	-10.60	-7.48	-11.421	-1
UNII8	6865	183	-6.801	-7.500	-4.126	-6.833	-7.779	-4.270	-7.034	-7.744	-4.364	-10.50	-10.12	-7.30	-11.424	-1
	6945	199	-6.345	-7.112	-3.701	-6.688	-7.373	-4.006	-6.936	-7.042	-3.978	-10.50	-10.12	-7.30	-10.999	-1
	7025	215	-6.085	-7.631	-3.779	-6.162	-7.299	-3.683	-6.302	-6.994	-3.624	-10.50	-10.12	-7.30	-10.921	-1

Mode : EHT80 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-4.696	-5.795	-2.201	-4.835	-5.761	-2.263	-4.528	-5.605	-2.023	-10.07	-9.91	-6.98	-9.002	-1
	6145	39	-3.873	-4.402	-1.119	-4.238	-4.211	-1.214	-4.109	-4.205	-1.147	-10.07	-9.91	-6.98	-8.099	-1
	6385	87	-4.077	-4.168	-1.112	-4.212	-3.851	-1.018	-3.871	-3.996	-0.923	-10.07	-9.91	-6.98	-7.902	-1
UNII6	6465	103	-4.490	-5.507	-1.959	-4.233	-5.745	-1.913	-4.081	-5.435	-1.695	-10.38	-10.60	-7.48	-9.174	-1
	6545	119	-4.726	-4.822	-1.764	-4.608	-5.071	-1.823	-4.558	-4.896	-1.714	-10.38	-10.60	-7.48	-9.193	-1
UNII7	6625	135	-4.387	-4.410	-1.388	-4.315	-4.521	-1.407	-4.159	-4.541	-1.336	-10.38	-10.60	-7.48	-8.815	-1
	6705	151	-4.147	-4.204	-1.165	-4.453	-4.466	-1.449	-4.403	-4.378	-1.380	-10.38	-10.60	-7.48	-8.644	-1
	6785	167	-3.921	-5.379	-1.579	-4.064	-5.414	-1.677	-3.831	-5.243	-1.470	-10.38	-10.60	-7.48	-8.949	-1
UNII8	6865	183	-4.210	-4.628	-1.404	-4.251	-4.456	-1.342	-4.142	-4.481	-1.298	-10.50	-10.12	-7.30	-8.596	-1
	6945	199	-3.786	-4.693	-1.206	-3.836	-4.541	-1.164	-3.957	-4.475	-1.198	-10.50	-10.12	-7.30	-8.462	-1
	7025	215	-3.939	-4.820	-1.347	-4.035	-4.501	-1.252	-4.166	-4.511	-1.325	-10.50	-10.12	-7.30	-8.549	-1

Mode : EHT80 MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-4.355	-5.570	-1.910	-4.187	-5.403	-1.743	-4.379	-5.351	-1.828	-10.07	-9.91	-6.98	-8.722	-1
	6145	39	-4.192	-4.723	-1.440	-4.150	-4.907	-1.502	-4.156	-4.811	-1.461	-10.07	-9.91	-6.98	-8.419	-1
	6385	87	-4.366	-4.348	-1.347	-4.409	-4.460	-1.425	-4.413	-4.252	-1.322	-10.07	-9.91	-6.98	-8.301	-1
UNII6	6465	103	-4.301	-4.805	-1.536	-4.166	-4.538	-1.338	-4.110	-5.064	-1.551	-10.38	-10.60	-7.48	-8.817	-1
	6545	119	-4.457	-4.905	-1.665	-4.519	-4.881	-1.686	-4.310	-4.925	-1.597	-10.38	-10.60	-7.48	-9.076	-1
UNII7	6625	135	-4.060	-4.096	-1.068	-4.130	-4.146	-1.128	-4.299	-3.999	-1.137	-10.38	-10.60	-7.48	-8.547	-1
	6705	151	-4.258	-4.242	-1.240	-3.734	-4.097	-0.902	-4.137	-4.094	-1.106	-10.38	-10.60	-7.48	-8.381	-1
	6785	167	-4.011	-5.214	-1.561	-3.867	-5.439	-1.572	-4.046	-5.346	-1.638	-10.38	-10.60	-7.48	-9.040	-1
UNII8	6865	183	-4.106	-4.528	-1.302	-4.070	-4.421	-1.232	-4.133	-4.473	-1.290	-10.50	-10.12	-7.30	-8.530	-1
	6945	199	-3.803	-4.126	-0.952	-3.620	-4.408	-0.986	-3.686	-4.451	-1.042	-10.50	-10.12	-7.30	-8.249	-1
	7025	215	-3.994	-4.648	-1.299	-3.898	-4.671	-1.257	-3.952	-4.805	-1.348	-10.50	-10.12	-7.30	-8.555	-1

Mode : EHT160(80L) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-5.414	-6.685	-2.993	-5.446	-6.676	-3.008	-5.460	-6.361	-2.877	-10.07	-9.91	-6.98	-9.856	-1
	6185	47	-5.967	-6.636	-3.279	-5.630	-6.328	-2.955	-5.621	-5.977	-2.785	-10.07	-9.91	-6.98	-9.765	-1
	6345	79	-6.258	-5.908	-3.069	-5.935	-5.760	-2.837	-5.762	-5.797	-2.769	-10.07	-9.91	-6.98	-9.749	-1
UNII6	6505	111	-6.981	-6.816	-3.888	-6.685	-6.336	-3.497	-6.901	-6.440	-3.654	-10.38	-10.60	-7.48	-10.976	-1
UNII7	6665	143	-6.733	-6.929	-3.820	-6.685	-6.824	-3.744	-6.774	-7.097	-3.922	-10.38	-10.60	-7.48	-11.223	-1
UNII8	6825	175	-6.930	-7.636	-4.259	-6.352	-7.619	-3.929	-7.027	-7.474	-4.235	-10.50	-10.12	-7.30	-11.227	-1
	6985	207	-6.837	-8.387	-4.533	-6.902	-7.994	-4.404	-7.177	-7.980	-4.550	-10.50	-10.12	-7.30	-11.701	-1

Mode: EHT160(80L) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.197	-7.222	-3.669	-6.289	-7.585	-3.878	-6.263	-7.376	-3.773	-10.07	-9.91	-6.98	-10.648	-1
	6185	47	-4.302	-4.564	-1.420	-4.259	-4.273	-1.255	-4.177	-4.328	-1.241	-10.07	-9.91	-6.98	-8.221	-1
	6345	79	-4.359	-4.139	-1.237	-4.364	-4.399	-1.371	-4.323	-4.222	-1.262	-10.07	-9.91	-6.98	-8.216	-1
UNII6	6505	111	-4.542	-5.253	-1.872	-4.844	-5.286	-2.049	-4.768	-5.124	-1.932	-10.38	-10.60	-7.48	-9.351	-1
UNII7	6665	143	-4.490	-5.527	-1.967	-4.362	-5.263	-1.779	-4.427	-5.507	-1.923	-10.38	-10.60	-7.48	-9.258	-1
UNII8	6825	175	-4.221	-4.538	-1.366	-4.044	-4.551	-1.279	-3.833	-4.766	-1.264	-10.50	-10.12	-7.30	-8.561	-1
	6985	207	-4.021	-4.216	-1.107	-4.233	-4.529	-1.368	-4.444	-4.340	-1.381	-10.50	-10.12	-7.30	-8.404	-1

Mode : EHT160(80L) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.568	-5.968	-2.202	-4.825	-5.658	-2.211	-4.795	-5.693	-2.211	-10.07	-9.91	-6.98	-9.181	-1
	6185	47	-4.162	-5.065	-1.580	-4.146	-5.050	-1.564	-4.389	-5.011	-1.679	-10.07	-9.91	-6.98	-8.544	-1
	6345	79	-4.052	-3.961	-0.996	-4.183	-4.421	-1.290	-4.195	-4.322	-1.248	-10.07	-9.91	-6.98	-7.976	-1
UNII6	6505	111	-4.376	-5.108	-1.717	-4.582	-5.230	-1.884	-4.275	-5.227	-1.715	-10.38	-10.60	-7.48	-9.194	-1
UNII7	6665	143	-4.230	-5.278	-1.712	-4.405	-5.111	-1.734	-4.388	-5.211	-1.770	-10.38	-10.60	-7.48	-9.191	-1
UNII8	6825	175	-4.149	-4.570	-1.344	-3.840	-4.430	-1.115	-4.003	-4.313	-1.145	-10.50	-10.12	-7.30	-8.413	-1
	6985	207	-4.171	-4.215	-1.183	-4.131	-4.368	-1.238	-4.304	-4.266	-1.275	-10.50	-10.12	-7.30	-8.481	-1

Mode: EHT160(80U) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.479	-6.361	-2.888	-5.341	-6.705	-2.960	-5.334	-6.633	-2.925	-10.07	-9.91	-6.98	-9.867	-1
	6185	47	-5.516	-5.937	-2.711	-5.522	-6.060	-2.773	-5.641	-6.123	-2.865	-10.07	-9.91	-6.98	-9.691	-1
	6345	79	-5.780	-6.047	-2.901	-5.474	-5.839	-2.643	-6.333	-6.442	-3.377	-10.07	-9.91	-6.98	-9.622	-1
UNII6	6505	111	-7.164	-6.323	-3.713	-7.164	-6.574	-3.849	-6.877	-6.780	-3.818	-10.38	-10.60	-7.48	-11.192	-1
UNII7	6665	143	-6.896	-6.909	-3.892	-7.083	-7.342	-4.200	-7.444	-7.769	-4.593	-10.38	-10.60	-7.48	-11.371	-1
UNII8	6825	175	-7.116	-7.302	-4.198	-7.051	-7.544	-4.280	-7.852	-7.811	-4.821	-10.50	-10.12	-7.30	-11.496	-1
	6985	207	-7.440	-7.792	-4.602	-7.166	-7.594	-4.365	-8.058	-7.470	-4.744	-10.50	-10.12	-7.30	-11.662	-1

Mode: EHT160(80U) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-6.337	-7.423	-3.835	-6.176	-7.544	-3.796	-6.485	-8.156	-4.230	-10.07	-9.91	-6.98	-10.775	-1
	6185	47	-4.271	-4.411	-1.330	-4.140	-3.983	-1.050	-4.408	-4.383	-1.385	-10.07	-9.91	-6.98	-8.029	-1
	6345	79	-4.361	-4.229	-1.284	-4.505	-4.167	-1.322	-4.758	-4.614	-1.675	-10.07	-9.91	-6.98	-8.263	-1
UNII6	6505	111	-4.997	-5.424	-2.195	-4.659	-5.372	-1.990	-4.840	-5.405	-2.103	-10.38	-10.60	-7.48	-9.469	-1
UNII7	6665	143	-4.405	-5.726	-2.005	-4.399	-5.720	-1.999	-4.587	-6.150	-2.288	-10.38	-10.60	-7.48	-9.478	-1
UNII8	6825	175	-4.232	-4.708	-1.453	-4.351	-4.786	-1.552	-4.681	-4.912	-1.784	-10.50	-10.12	-7.30	-8.750	-1
	6985	207	-4.462	-4.586	-1.513	-4.669	-4.210	-1.423	-4.558	-4.308	-1.421	-10.50	-10.12	-7.30	-8.718	-1

Mode : EHT160(80U) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.599	-5.933	-2.205	-4.667	-5.847	-2.207	-4.724	-5.637	-2.146	-10.07	-9.91	-6.98	-9.126	-1
	6185	47	-4.525	-4.564	-1.534	-4.488	-4.850	-1.655	-4.386	-4.709	-1.534	-10.07	-9.91	-6.98	-8.514	-1
	6345	79	-4.480	-4.028	-1.238	-4.541	-4.291	-1.404	-4.319	-4.388	-1.343	-10.07	-9.91	-6.98	-8.217	-1
UNII6	6505	111	-4.840	-5.121	-1.968	-4.637	-5.072	-1.839	-4.644	-4.991	-1.804	-10.38	-10.60	-7.48	-9.283	-1
UNII7	6665	143	-4.472	-5.482	-1.938	-4.123	-5.639	-1.805	-4.282	-5.569	-1.868	-10.38	-10.60	-7.48	-9.284	-1
UNII8	6825	175	-4.041	-4.476	-1.243	-3.817	-4.674	-1.214	-3.962	-4.783	-1.343	-10.50	-10.12	-7.30	-8.512	-1
	6985	207	-4.410	-4.352	-1.371	-4.368	-4.384	-1.366	-4.357	-4.273	-1.305	-10.50	-10.12	-7.30	-8.602	-1

Mode : EHT160 MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.867	-5.106	-1.975	-4.763	-5.511	-2.111	-4.903	-5.585	-2.221	-10.07	-9.91	-6.98	-8.954	-1
	6185	47	-4.474	-5.027	-1.732	-4.262	-5.080	-1.642	-4.499	-5.234	-1.841	-10.07	-9.91	-6.98	-8.621	-1
	6345	79	-4.533	-4.851	-1.679	-4.464	-4.707	-1.574	-4.304	-4.760	-1.516	-10.07	-9.91	-6.98	-8.495	-1
UNII6	6505	111	-4.639	-4.366	-1.490	-4.616	-4.504	-1.550	-4.603	-4.571	-1.577	-10.38	-10.60	-7.48	-8.969	-1
UNII7	6665	143	-4.222	-5.076	-1.618	-4.174	-4.765	-1.450	-4.431	-4.906	-1.652	-10.38	-10.60	-7.48	-8.929	-1
UNII8	6825	175	-4.229	-4.612	-1.406	-3.996	-4.594	-1.275	-4.022	-4.554	-1.270	-10.50	-10.12	-7.30	-8.568	-1
	6985	207	-4.184	-4.157	-1.161	-3.949	-4.292	-1.107	-4.214	-4.015	-1.103	-10.50	-10.12	-7.30	-8.401	-1

Mode: EHT160 MRU 996T+484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.661	-6.264	-2.942	-5.508	-6.223	-2.840	-5.691	-6.312	-2.980	-10.07	-9.91	-6.98	-9.820	-1
	6185	47	-5.354	-5.803	-2.562	-5.269	-6.049	-2.631	-5.332	-5.981	-2.634	-10.07	-9.91	-6.98	-9.542	-1
	6345	79	-5.583	-5.520	-2.541	-5.192	-5.752	-2.453	-5.237	-5.604	-2.406	-10.07	-9.91	-6.98	-9.386	-1
UNII6	6505	111	-5.410	-5.086	-2.235	-5.529	-5.386	-2.447	-5.489	-5.266	-2.366	-10.38	-10.60	-7.48	-9.714	-1
UNII7	6665	143	-5.075	-5.623	-2.330	-5.088	-5.591	-2.322	-5.053	-5.570	-2.293	-10.38	-10.60	-7.48	-9.772	-1
UNII8	6825	175	-4.566	-5.537	-2.014	-4.697	-5.223	-1.942	-4.681	-5.454	-2.040	-10.50	-10.12	-7.30	-9.239	-1
	6985	207	-5.014	-4.802	-1.896	-4.594	-5.128	-1.842	-4.904	-4.729	-1.805	-10.50	-10.12	-7.30	-9.103	-1

Mode: EHT320(80LL) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dB]	[dB]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.176	-8.168	-4.634	-6.996	-7.846	-4.390	-6.907	-7.460	-4.165	-10.07	-9.91	-6.98	-11.144	-1
	6265	63	-7.553	-7.531	-4.532	-7.502	-7.468	-4.475	-6.935	-6.921	-3.918	-10.07	-9.91	-6.98	-10.897	-1
UNII6	6425	95	-7.454	-7.442	-4.438	-7.312	-7.192	-4.242	-6.799	-6.995	-3.886	-10.38	-10.60	-7.48	-11.365	-1
	6585	127	-7.362	-7.881	-4.604	-7.621	-7.526	-4.563	-7.336	-7.126	-4.220	-10.38	-10.60	-7.48	-11.699	-1
UNII8	6745	159	-6.760	-7.823	-4.249	-6.655	-7.911	-4.228	-6.758	-7.199	-3.963	-10.50	-10.12	-7.30	-11.260	-1
	6905	191	-7.431	-8.734	-5.024	-7.649	-8.137	-4.876	-7.332	-8.238	-4.751	-10.50	-10.12	-7.30	-12.049	-1

Mode : EHT320(80LL) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.638	-4.486	-1.551	-4.716	-4.352	-1.520	-4.334	-4.408	-1.361	-10.07	-9.91	-6.98	-8.340	-1
	6265	63	-4.208	-5.528	-1.808	-3.922	-5.373	-1.577	-3.941	-5.076	-1.461	-10.07	-9.91	-6.98	-8.441	-1
UNII6	6425	95	-3.437	-5.451	-1.318	-3.408	-5.381	-1.273	-3.945	-5.036	-1.446	-10.38	-10.60	-7.48	-8.752	-1
	6585	127	-4.529	-4.168	-1.335	-4.629	-4.128	-1.361	-4.191	-4.359	-1.264	-10.38	-10.60	-7.48	-8.743	-1
UNII8	6745	159	-4.197	-4.267	-1.222	-4.107	-4.281	-1.183	-3.999	-4.862	-1.399	-10.50	-10.12	-7.30	-8.481	-1
	6905	191	-3.933	-4.395	-1.148	-3.891	-4.502	-1.176	-3.905	-4.461	-1.164	-10.50	-10.12	-7.30	-8.445	-1

Mode: EHT320(80LL) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.872	-5.468	-2.150	-5.205	-5.474	-2.327	-4.991	-5.568	-2.260	-10.07	-9.91	-6.98	-9.129	-1
	6265	63	-3.602	-4.992	-1.232	-3.918	-5.036	-1.431	-3.791	-5.196	-1.427	-10.07	-9.91	-6.98	-8.211	-1
UNII6	6425	95	-4.032	-5.806	-1.819	-3.740	-5.586	-1.556	-3.853	-5.354	-1.529	-10.38	-10.60	-7.48	-9.008	-1
	6585	127	-4.270	-4.143	-1.196	-4.221	-3.772	-0.981	-4.267	-3.931	-1.086	-10.38	-10.60	-7.48	-8.460	-1
UNII8	6745	159	-3.855	-4.631	-1.216	-4.178	-4.750	-1.445	-4.209	-4.636	-1.407	-10.50	-10.12	-7.30	-8.513	-1
	6905	191	-4.224	-4.437	-1.319	-4.086	-4.222	-1.143	-3.941	-4.343	-1.127	-10.50	-10.12	-7.30	-8.425	-1

Mode: EHT320(80LM) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.191	-7.335	-3.715	-5.812	-6.652	-3.202	-4.363	-5.715	-1.977	-10.07	-9.91	-6.98	-8.956	-1
	6265	63	-6.790	-6.886	-3.828	-6.498	-6.362	-3.419	-4.788	-5.554	-2.144	-10.07	-9.91	-6.98	-9.123	-1
UNII6	6425	95	-6.779	-6.923	-3.840	-6.119	-5.567	-2.824	-5.631	-5.032	-2.311	-10.38	-10.60	-7.48	-9.790	-1
	6585	127	-7.613	-7.169	-4.375	-6.705	-6.633	-3.659	-5.858	-6.053	-2.944	-10.38	-10.60	-7.48	-10.423	-1
UNII8	6745	159	-6.377	-7.288	-3.799	-6.070	-6.696	-3.362	-5.424	-6.169	-2.770	-10.50	-10.12	-7.30	-10.068	-1
	6905	191	-7.191	-7.812	-4.480	-6.224	-7.336	-3.734	-6.155	-6.225	-3.180	-10.50	-10.12	-7.30	-10.477	-1

Mode : EHT320(80LM) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.564	-4.169	-1.352	-4.057	-3.542	-0.782	-3.795	-4.099	-0.934	-10.07	-9.91	-6.98	-7.761	-1
	6265	63	-3.730	-5.101	-1.352	-3.855	-5.296	-1.506	-3.439	-4.350	-0.861	-10.07	-9.91	-6.98	-7.840	-1
UNII6	6425	95	-3.628	-5.121	-1.301	-3.523	-5.351	-1.331	-3.424	-5.240	-1.228	-10.38	-10.60	-7.48	-8.707	-1
	6585	127	-4.601	-4.538	-1.559	-4.220	-4.253	-1.226	-4.241	-4.526	-1.371	-10.38	-10.60	-7.48	-8.705	-1
UNII8	6745	159	-4.156	-4.601	-1.363	-4.053	-4.302	-1.166	-3.965	-4.398	-1.166	-10.50	-10.12	-7.30	-8.463	-1
	6905	191	-3.794	-4.682	-1.205	-3.994	-4.329	-1.148	-4.232	-4.547	-1.377	-10.50	-10.12	-7.30	-8.446	-1

Mode : EHT320(80LM) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.523	-4.855	-1.676	-3.961	-4.784	-1.343	-4.548	-5.036	-1.775	-10.07	-9.91	-6.98	-8.322	-1
	6265	63	-3.445	-4.490	-0.926	-3.652	-4.329	-0.967	-3.489	-4.585	-0.992	-10.07	-9.91	-6.98	-7.905	-1
UNII6	6425	95	-4.034	-5.400	-1.653	-3.839	-5.120	-1.422	-3.679	-5.412	-1.450	-10.38	-10.60	-7.48	-8.901	-1
	6585	127	-4.178	-3.904	-1.029	-3.890	-3.907	-0.888	-4.361	-3.953	-1.142	-10.38	-10.60	-7.48	-8.367	-1
UNII8	6745	159	-3.942	-4.777	-1.329	-3.765	-4.885	-1.279	-4.059	-4.656	-1.337	-10.50	-10.12	-7.30	-8.577	-1
	6905	191	-3.903	-4.174	-1.026	-3.689	-3.979	-0.822	-4.163	-4.251	-1.197	-10.50	-10.12	-7.30	-8.119	-1

Mode : EHT320(80MH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.509	-5.606	-2.013	-5.028	-6.419	-2.658	-5.946	-7.162	-3.501	-10.07	-9.91	-6.98	-8.992	-1
	6265	63	-5.296	-5.086	-2.180	-5.886	-5.951	-2.908	-6.662	-6.883	-3.761	-10.07	-9.91	-6.98	-9.159	-1
UNII6	6425	95	-5.423	-5.223	-2.312	-6.197	-5.895	-3.033	-7.373	-6.860	-4.099	-10.38	-10.60	-7.48	-9.791	-1
	6585	127	-5.897	-5.981	-2.929	-6.576	-6.941	-3.745	-7.407	-7.563	-4.474	-10.38	-10.60	-7.48	-10.408	-1
UNII8	6745	159	-5.279	-6.291	-2.746	-6.219	-6.703	-3.444	-7.157	-7.086	-4.111	-10.50	-10.12	-7.30	-10.043	-1
	6905	191	-6.332	-6.570	-3.439	-6.686	-6.946	-3.804	-8.544	-7.858	-5.177	-10.50	-10.12	-7.30	-10.737	-1

Mode : EHT320(80MH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.992	-3.838	-0.904	-4.174	-4.006	-1.079	-3.724	-4.012	-0.856	-10.07	-9.91	-6.98	-7.835	-1
	6265	63	-3.508	-4.636	-1.025	-4.197	-5.068	-1.601	-4.067	-4.875	-1.442	-10.07	-9.91	-6.98	-8.005	-1
UNII6	6425	95	-3.263	-5.167	-1.101	-3.941	-5.413	-1.605	-4.179	-5.303	-1.695	-10.38	-10.60	-7.48	-8.580	-1
	6585	127	-4.179	-4.334	-1.246	-4.513	-4.567	-1.530	-4.532	-4.700	-1.605	-10.38	-10.60	-7.48	-8.725	-1
UNII8	6745	159	-3.640	-4.924	-1.225	-4.218	-5.069	-1.613	-4.344	-4.858	-1.583	-10.50	-10.12	-7.30	-8.522	-1
	6905	191	-4.222	-4.575	-1.385	-4.439	-4.527	-1.473	-4.560	-4.634	-1.587	-10.50	-10.12	-7.30	-8.682	-1

Mode: EHT320(80MH) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.738	-4.866	-1.791	-4.405	-4.725	-1.552	-4.539	-4.955	-1.732	-10.07	-9.91	-6.98	-8.531	-1
	6265	63	-3.949	-4.580	-1.243	-3.431	-4.232	-0.803	-3.463	-4.430	-0.910	-10.07	-9.91	-6.98	-7.782	-1
UNII6	6425	95	-3.723	-5.418	-1.478	-3.829	-4.979	-1.356	-3.899	-5.390	-1.571	-10.38	-10.60	-7.48	-8.835	-1
	6585	127	-4.265	-3.966	-1.103	-3.332	-3.957	-0.623	-4.055	-4.065	-1.050	-10.38	-10.60	-7.48	-8.102	-1
UNII8	6745	159	-3.608	-5.166	-1.307	-3.528	-4.301	-0.887	-3.791	-4.985	-1.337	-10.50	-10.12	-7.30	-8.185	-1
	6905	191	-3.783	-4.412	-1.076	-3.611	-3.877	-0.732	-3.548	-4.324	-0.909	-10.50	-10.12	-7.30	-8.030	-1

Mode : EHT320(80HH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.137	-7.578	-3.788	-6.405	-7.605	-3.954	-6.208	-7.660	-3.864	-10.07	-9.91	-6.98	-10.767	-1
	6265	63	-6.852	-7.080	-3.954	-7.173	-6.954	-4.052	-7.542	-7.709	-4.615	-10.07	-9.91	-6.98	-10.934	-1
UNII6	6425	95	-7.319	-7.284	-4.291	-7.628	-7.812	-4.709	-7.997	-7.689	-4.830	-10.38	-10.60	-7.48	-11.770	-1
	6585	127	-7.793	-7.762	-4.767	-8.065	-7.809	-4.925	-8.194	-9.011	-5.573	-10.38	-10.60	-7.48	-12.246	-1
UNII8	6745	159	-7.551	-7.443	-4.487	-7.953	-8.374	-5.148	-8.507	-8.550	-5.518	-10.50	-10.12	-7.30	-11.784	-1
	6905	191	-8.336	-7.828	-5.064	-8.764	-7.613	-5.140	-9.420	-8.685	-6.027	-10.50	-10.12	-7.30	-12.362	-1

Mode : EHT320(80HH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.610	-4.185	-0.878	-3.839	-3.901	-0.860	-3.665	-3.778	-0.711	-10.07	-9.91	-6.98	-7.690	-1
	6265	63	-4.062	-4.807	-1.408	-3.684	-4.941	-1.257	-4.578	-4.793	-1.674	-10.07	-9.91	-6.98	-8.236	-1
UNII6	6425	95	-3.829	-5.112	-1.413	-4.106	-5.112	-1.570	-3.659	-4.975	-1.257	-10.38	-10.60	-7.48	-8.736	-1
	6585	127	-4.388	-4.816	-1.587	-4.355	-5.042	-1.675	-4.207	-5.026	-1.587	-10.38	-10.60	-7.48	-9.066	-1
UNII8	6745	159	-3.950	-4.796	-1.342	-4.091	-5.109	-1.560	-4.398	-5.035	-1.695	-10.50	-10.12	-7.30	-8.640	-1
	6905	191	-4.412	-4.672	-1.530	-4.126	-4.729	-1.407	-4.739	-4.377	-1.544	-10.50	-10.12	-7.30	-8.705	-1

Mode : EHT320(80HH) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.628	-5.020	-1.810	-4.383	-4.992	-1.667	-4.627	-4.991	-1.795	-10.07	-9.91	-6.98	-8.646	-1
	6265	63	-4.246	-4.742	-1.477	-3.987	-4.720	-1.328	-4.134	-4.676	-1.386	-10.07	-9.91	-6.98	-8.307	-1
UNII6	6425	95	-4.234	-5.549	-1.832	-4.328	-5.728	-1.962	-4.497	-5.643	-2.022	-10.38	-10.60	-7.48	-9.311	-1
	6585	127	-4.383	-4.341	-1.352	-4.436	-4.295	-1.355	-4.136	-4.583	-1.344	-10.38	-10.60	-7.48	-8.823	-1
UNII8	6745	159	-4.190	-5.378	-1.733	-3.838	-5.078	-1.404	-4.075	-5.213	-1.597	-10.50	-10.12	-7.30	-8.701	-1
	6905	191	-4.592	-4.629	-1.600	-4.319	-4.376	-1.337	-4.313	-4.474	-1.383	-10.50	-10.12	-7.30	-8.635	-1

Mode: EHT320(160L) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.874	-5.216	-1.483	-4.109	-5.188	-1.605	-4.718	-5.245	-1.963	-10.07	-9.91	-6.98	-8.462	-1
	6265	63	-2.969	-4.057	-0.469	-2.801	-3.799	-0.261	-3.513	-4.579	-1.003	-10.07	-9.91	-6.98	-7.240	-1
UNII6	6425	95	-3.601	-4.461	-0.999	-3.337	-4.237	-0.753	-3.320	-4.601	-0.903	-10.38	-10.60	-7.48	-8.232	-1
	6585	127	-3.850	-3.812	-0.821	-4.042	-3.633	-0.822	-4.061	-3.873	-0.956	-10.38	-10.60	-7.48	-8.300	-1
UNII8	6745	159	-3.358	-3.627	-0.480	-3.639	-3.460	-0.538	-3.736	-3.504	-0.608	-10.50	-10.12	-7.30	-7.778	-1
	6905	191	-3.782	-3.948	-0.854	-3.873	-4.052	-0.951	-4.006	-4.522	-1.246	-10.50	-10.12	-7.30	-8.151	-1

Mode : EHT320(160U) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.501	-4.998	-1.732	-4.009	-4.902	-1.422	-4.119	-4.460	-1.276	-10.07	-9.91	-6.98	-8.255	-1
	6265	63	-3.845	-4.038	-0.930	-3.055	-3.643	-0.329	-3.241	-3.916	-0.555	-10.07	-9.91	-6.98	-7.308	-1
UNII6	6425	95	-3.605	-4.425	-0.985	-3.413	-4.084	-0.725	-3.579	-4.032	-0.789	-10.38	-10.60	-7.48	-8.204	-1
	6585	127	-3.730	-3.758	-0.734	-3.243	-3.388	-0.305	-3.870	-3.237	-0.532	-10.38	-10.60	-7.48	-7.784	-1
UNII8	6745	159	-3.545	-3.804	-0.662	-2.791	-3.091	0.072	-3.322	-3.296	-0.299	-10.50	-10.12	-7.30	-7.226	-1
	6905	191	-3.881	-4.258	-1.055	-3.016	-3.646	-0.309	-3.692	-4.217	-0.936	-10.50	-10.12	-7.30	-7.607	-1

Mode : EHT320 3x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.144	-8.348	-5.235	-8.001	-8.232	-5.105	-7.860	-8.733	-5.264	-10.07	-9.91	-6.98	-12.084	-1
	6265	63	-7.222	-7.688	-4.439	-6.792	-7.277	-4.017	-7.038	-8.124	-4.537	-10.07	-9.91	-6.98	-10.997	-1
UNII6	6425	95	-7.413	-8.038	-4.704	-7.095	-7.956	-4.494	-7.364	-8.286	-4.790	-10.38	-10.60	-7.48	-11.973	-1
	6585	127	-7.046	-7.159	-4.092	-7.477	-7.150	-4.300	-7.503	-7.443	-4.463	-10.38	-10.60	-7.48	-11.571	-1
UNII8	6745	159	-6.143	-7.122	-3.595	-7.181	-6.922	-4.039	-7.147	-7.320	-4.222	-10.50	-10.12	-7.30	-10.892	-1
	6905	191	-7.074	-7.624	-4.330	-7.110	-7.618	-4.346	-7.976	-8.008	-4.982	-10.50	-10.12	-7.30	-11.628	-1

Mode : EHT320 2x996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.061	-7.655	-4.338	-7.180	-7.605	-4.377	-7.427	-7.581	-4.493	-10.07	-9.91	-6.98	-11.317	-1
	6265	63	-6.169	-6.909	-3.513	-5.776	-7.279	-3.453	-6.185	-6.974	-3.552	-10.07	-9.91	-6.98	-10.432	-1
UNII6	6425	95	-6.621	-6.968	-3.781	-6.615	-7.482	-4.017	-6.820	-7.658	-4.209	-10.38	-10.60	-7.48	-11.260	-1
	6585	127	-7.114	-6.437	-3.752	-6.805	-6.587	-3.685	-6.229	-6.494	-3.350	-10.38	-10.60	-7.48	-10.829	-1
UNII8	6745	159	-6.955	-6.329	-3.621	-6.677	-6.321	-3.486	-6.253	-6.436	-3.334	-10.50	-10.12	-7.30	-10.631	-1
	6905	191	-6.857	-6.845	-3.841	-6.763	-6.977	-3.859	-6.474	-7.099	-3.765	-10.50	-10.12	-7.30	-11.063	-1

Mode : EHT320 3x996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.591	-9.841	-6.704	-9.100	-10.035	-6.532	-9.756	-10.371	-7.042	-10.07	-9.91	-6.98	-13.511	-1
	6265	63	-8.054	-9.599	-5.748	-9.069	-10.505	-6.717	-8.842	-9.412	-6.107	-10.07	-9.91	-6.98	-12.727	-1
UNII6	6425	95	-8.532	-9.943	-6.170	-8.499	-9.937	-6.148	-8.999	-10.343	-6.609	-10.38	-10.60	-7.48	-13.627	-1
	6585	127	-8.960	-8.300	-5.607	-9.337	-8.843	-6.072	-9.453	-9.011	-6.216	-10.38	-10.60	-7.48	-13.086	-1
UNII8	6745	159	-8.544	-8.758	-5.639	-8.473	-8.942	-5.691	-8.877	-8.620	-5.736	-10.50	-10.12	-7.30	-12.937	-1
	6905	191	-9.288	-8.977	-6.119	-9.754	-9.099	-6.404	-9.579	-9.564	-6.561	-10.50	-10.12	-7.30	-13.417	-1

10.4.2 Standard client

Standard client Limit : 17 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.4.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-0.576	-2.134	1.725	-2.245	-3.442	0.208	-0.733	-2.098	1.648	-10.07	-9.91	-6.98	-5.254	17
	6175	45	11.178	10.816	14.011	9.929	9.304	12.638	10.984	10.663	13.837	-10.07	-9.91	-6.98	7.032	17
	6415	93	11.229	11.165	14.208	9.671	10.198	12.953	10.870	10.993	13.942	-10.07	-9.91	-6.98	7.228	17
UNII7	6535	117	10.701	10.891	13.808	9.307	9.682	12.509	10.847	10.844	13.856	-10.38	-10.60	-7.48	6.377	17
	6695	149	11.028	10.987	14.018	9.895	9.312	12.624	11.231	11.005	14.130	-10.38	-10.60	-7.48	6.651	17
	6855	181	10.994	10.452	13.742	9.537	9.117	12.343	10.755	10.476	13.628	-10.38	-10.60	-7.48	6.263	17

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	1.029	0.669	3.863	0.444	0.541	3.503	0.761	0.723	3.753	-10.07	-9.91	-6.98	-3.116	17
	6175	45	8.051	7.875	10.974	7.883	7.662	10.784	8.545	8.186	11.380	-10.07	-9.91	-6.98	4.400	17
	6415	93	8.192	8.152	11.183	8.206	8.156	11.192	8.311	8.260	11.296	-10.07	-9.91	-6.98	4.317	17
UNII7	6535	117	8.094	8.436	11.279	7.514	8.003	10.776	7.816	8.123	10.983	-10.38	-10.60	-7.48	3.800	17
	6695	149	8.453	8.183	11.331	8.384	8.113	11.261	8.427	8.030	11.244	-10.38	-10.60	-7.48	3.852	17
	6855	181	8.636	7.599	11.159	8.059	7.618	10.855	8.684	7.976	11.355	-10.38	-10.60	-7.48	3.876	17

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	0.079	0.259	3.180	-	-	-	0.055	0.019	3.047	-10.07	-9.91	-6.98	-3.799	17
	6175	45	5.206	5.030	8.129	-	-	-	5.183	4.830	8.020	-10.07	-9.91	-6.98	1.150	17
	6415	93	5.577	5.270	8.437	-	-	-	5.407	5.291	8.360	-10.07	-9.91	-6.98	1.457	17
UNII7	6535	117	4.958	5.348	8.168	-	-	-	4.848	4.921	7.895	-10.38	-10.60	-7.48	0.689	17
	6695	149	5.638	5.238	8.453	-	-	-	5.646	4.929	8.313	-10.38	-10.60	-7.48	0.974	17
	6855	181	5.312	4.786	8.067	-	-	-	5.271	4.597	7.957	-10.38	-10.60	-7.48	0.588	17

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-0.601	-0.862	2.281	-	-	-	-10.07	-9.91	-6.98	-4.698	17
	6175	45	-	-	-	4.613	4.346	7.492	-	-	-	-10.07	-9.91	-6.98	0.513	17
	6415	93	-	-	-	4.710	3.693	7.242	-	-	-	-10.07	-9.91	-6.98	0.262	17
UNII7	6535	117	-	-	-	4.446	4.390	7.429	-	-	-	-10.38	-10.60	-7.48	-0.050	17
	6695	149	-	-	-	4.737	4.215	7.494	-	-	-	-10.38	-10.60	-7.48	0.015	17
	6855	181	-	-	-	4.948	4.554	7.766	-	-	-	-10.38	-10.60	-7.48	0.287	17

Mode: EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-3.846	-3.913	-0.869	-	-	-	-10.07	-9.91	-6.98	-7.848	17
	6175	45	-	-	-	4.286	3.537	6.938	-	-	-	-10.07	-9.91	-6.98	-0.041	17
	6415	93	-	-	-	4.192	3.166	6.720	-	-	-	-10.07	-9.91	-6.98	-0.259	17
UNII7	6535	117	-	-	-	4.134	3.860	7.010	-	-	-	-10.38	-10.60	-7.48	-0.469	17
	6695	149	-	-	-	4.247	3.685	6.986	-	-	-	-10.38	-10.60	-7.48	-0.493	17
	6855	181	-	-	-	4.272	3.879	7.091	-	-	-	-10.38	-10.60	-7.48	-0.388	17

Mode: EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	10.670	9.801	13.268	10.293	9.838	13.082	10.739	9.766	13.290	-10.07	-9.91	-6.98	6.311	17
	6165	43	10.873	10.111	13.519	10.571	9.851	13.237	10.679	10.295	13.502	-10.07	-9.91	-6.98	6.540	17
	6405	91	10.845	10.475	13.675	10.626	10.465	13.557	11.128	10.549	13.859	-10.07	-9.91	-6.98	6.879	17
UNII7	6565	123	10.984	11.020	14.013	10.719	10.424	13.585	10.944	10.754	13.861	-10.38	-10.60	-7.48	6.534	17
	6685	147	11.041	10.982	14.022	10.995	10.620	13.822	10.729	10.478	13.616	-10.38	-10.60	-7.48	6.543	17
	6845	179	11.027	10.518	13.791	10.609	10.248	13.443	10.795	10.206	13.521	-10.38	-10.60	-7.48	6.312	17

Mode: EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	7.779	7.164	10.493	7.947	6.954	10.489	7.877	6.897	10.425	-10.07	-9.91	-6.98	3.514	17
	6165	43	7.929	7.436	10.700	7.970	7.287	10.652	7.894	7.470	10.698	-10.07	-9.91	-6.98	3.721	17
	6405	91	8.147	7.612	10.898	8.007	7.446	10.746	8.288	7.634	10.984	-10.07	-9.91	-6.98	4.004	17
UNII7	6565	123	8.101	8.044	11.083	7.865	8.067	10.978	7.863	7.866	10.875	-10.38	-10.60	-7.48	3.604	17
	6685	147	8.494	7.815	11.178	7.941	7.757	10.861	8.142	8.336	11.251	-10.38	-10.60	-7.48	3.772	17
	6845	179	8.432	7.502	11.002	8.128	7.435	10.806	8.332	7.706	11.041	-10.38	-10.60	-7.48	3.562	17

Mode: EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	4.773	4.145	7.481	4.507	3.887	7.218	4.878	4.159	7.544	-10.07	-9.91	-6.98	0.564	17
	6165	43	4.855	4.685	7.781	4.632	4.430	7.543	4.974	4.637	7.819	-10.07	-9.91	-6.98	0.840	17
	6405	91	4.904	4.729	7.828	4.769	4.461	7.628	4.924	4.811	7.878	-10.07	-9.91	-6.98	0.899	17
UNII7	6565	123	5.078	4.946	8.023	4.967	4.806	7.898	5.211	5.200	8.216	-10.38	-10.60	-7.48	0.737	17
	6685	147	5.210	4.946	8.090	4.960	4.720	7.852	5.279	4.794	8.054	-10.38	-10.60	-7.48	0.611	17
	6845	179	5.562	4.670	8.149	5.165	4.680	7.940	5.110	4.535	7.842	-10.38	-10.60	-7.48	0.670	17

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	4.055	3.986	7.031	-	-	-	4.222	3.910	7.079	-10.07	-9.91	-6.98	0.099	17
	6165	43	4.436	3.918	7.195	-	-	-	4.422	3.896	7.177	-10.07	-9.91	-6.98	0.215	17
	6405	91	4.680	3.708	7.231	-	-	-	4.312	3.720	7.036	-10.07	-9.91	-6.98	0.252	17
UNII7	6565	123	4.260	4.833	7.566	-	-	-	4.591	4.863	7.739	-10.38	-10.60	-7.48	0.260	17
	6685	147	4.560	4.096	7.344	-	-	-	4.495	3.791	7.167	-10.38	-10.60	-7.48	-0.135	17
	6845	179	4.751	4.044	7.422	-	-	-	4.515	4.010	7.280	-10.38	-10.60	-7.48	-0.057	17

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	1.626	1.172	4.415	-	-	-	-10.07	-9.91	-6.98	-2.564	17
	6165	43	-	-	-	1.454	0.916	4.204	-	-	-	-10.07	-9.91	-6.98	-2.776	17
	6405	91	-	-	-	1.473	0.871	4.193	-	-	-	-10.07	-9.91	-6.98	-2.787	17
UNII7	6565	123	-	-	-	1.480	1.755	4.630	-	-	-	-10.38	-10.60	-7.48	-2.849	17
	6685	147	-	-	-	1.669	1.094	4.401	-	-	-	-10.38	-10.60	-7.48	-3.078	17
	6845	179	-	-	-	1.938	1.266	4.625	-	-	-	-10.38	-10.60	-7.48	-2.854	17

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	0.795	0.798	3.807	-	-	-	-10.07	-9.91	-6.98	-3.172	17
	6165	43	-	-	-	1.079	0.434	3.779	-	-	-	-10.07	-9.91	-6.98	-3.200	17
	6405	91	-	-	-	0.986	0.439	3.731	-	-	-	-10.07	-9.91	-6.98	-3.248	17
UNII7	6565	123	-	-	-	1.165	1.436	4.313	-	-	-	-10.38	-10.60	-7.48	-3.166	17
	6685	147	-	-	-	1.343	0.533	3.967	-	-	-	-10.38	-10.60	-7.48	-3.512	17
	6845	179	-	-	-	1.227	0.869	4.062	-	-	-	-10.38	-10.60	-7.48	-3.417	17

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	10.318	9.296	12.847	10.391	9.049	12.782	10.636	8.930	12.877	-10.07	-9.91	-6.98	5.897	17
	6145	39	10.248	9.992	13.132	10.276	9.945	13.124	10.101	9.548	12.844	-10.07	-9.91	-6.98	6.153	17
	6385	87	10.646	9.881	13.291	10.261	10.080	13.182	10.513	10.241	13.390	-10.07	-9.91	-6.98	6.410	17
UNII7	6625	135	10.010	10.133	13.082	10.363	10.251	13.318	10.604	9.994	13.320	-10.38	-10.60	-7.48	5.841	17
	6705	151	10.378	10.684	13.544	10.227	10.133	13.191	10.451	9.856	13.174	-10.38	-10.60	-7.48	6.065	17
	6785	167	10.468	10.091	13.294	10.313	10.148	13.242	10.464	10.243	13.365	-10.38	-10.60	-7.48	5.886	17

Mode: EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	7.600	6.955	10.300	7.716	6.610	10.208	8.084	6.754	10.480	-10.07	-9.91	-6.98	3.501	17
	6145	39	7.635	7.455	10.556	7.361	7.121	10.253	7.741	7.441	10.604	-10.07	-9.91	-6.98	3.624	17
	6385	87	7.525	7.263	10.406	7.677	7.583	10.640	7.525	7.969	10.763	-10.07	-9.91	-6.98	3.784	17
UNII7	6625	135	7.719	8.087	10.917	7.520	7.349	10.446	7.673	7.489	10.592	-10.38	-10.60	-7.48	3.438	17
	6705	151	7.883	7.640	10.773	7.478	7.468	10.483	7.750	7.240	10.513	-10.38	-10.60	-7.48	3.294	17
	6785	167	7.846	7.800	10.833	7.740	7.694	10.727	8.136	7.672	10.920	-10.38	-10.60	-7.48	3.441	17

Mode: EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	4.507	3.763	7.161	4.886	3.566	7.286	4.733	3.502	7.171	-10.07	-9.91	-6.98	0.307	17
	6145	39	4.714	4.333	7.538	4.910	4.146	7.555	4.660	4.144	7.420	-10.07	-9.91	-6.98	0.576	17
	6385	87	4.900	4.216	7.582	4.620	5.102	7.878	4.852	4.594	7.735	-10.07	-9.91	-6.98	0.898	17
UNII7	6625	135	4.735	4.955	7.857	4.633	4.228	7.445	4.672	4.588	7.640	-10.38	-10.60	-7.48	0.378	17
	6705	151	4.696	4.359	7.541	4.973	4.498	7.752	4.793	4.160	7.498	-10.38	-10.60	-7.48	0.273	17
	6785	167	4.993	4.398	7.716	4.692	4.438	7.577	5.026	4.546	7.803	-10.38	-10.60	-7.48	0.324	17

Mode: EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	4.078	3.774	6.939	4.147	3.491	6.841	4.159	3.626	6.911	-10.07	-9.91	-6.98	-0.041	17
	6145	39	4.305	3.265	6.826	4.049	3.299	6.700	4.230	3.618	6.945	-10.07	-9.91	-6.98	-0.035	17
	6385	87	3.948	3.510	6.744	3.916	3.453	6.701	4.176	3.422	6.825	-10.07	-9.91	-6.98	-0.154	17
UNII7	6625	135	3.908	4.324	7.131	4.007	4.271	7.151	4.001	4.185	7.104	-10.38	-10.60	-7.48	-0.328	17
	6705	151	4.193	4.192	7.202	4.192	3.972	7.093	4.138	3.765	6.965	-10.38	-10.60	-7.48	-0.277	17
	6785	167	4.512	4.219	7.378	4.447	3.963	7.222	4.730	4.108	7.440	-10.38	-10.60	-7.48	-0.039	17

Mode: EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	1.329	0.929	4.144	-	-	-	1.436	0.635	4.065	-10.07	-9.91	-6.98	-2.835	17
	6145	39	1.100	0.624	3.879	-	-	-	1.254	0.743	4.017	-10.07	-9.91	-6.98	-2.963	17
	6385	87	1.389	0.282	3.881	-	-	-	1.130	0.629	3.897	-10.07	-9.91	-6.98	-3.082	17
UNII7	6625	135	1.355	1.426	4.401	-	-	-	1.283	1.114	4.210	-10.38	-10.60	-7.48	-3.078	17
	6705	151	1.462	1.078	4.285	-	-	-	1.218	0.860	4.053	-10.38	-10.60	-7.48	-3.194	17
	6785	167	1.496	0.827	4.185	-	-	-	1.627	1.033	4.351	-10.38	-10.60	-7.48	-3.128	17

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-2.889	-3.465	-0.157	-	-	-	-10.07	-9.91	-6.98	-7.137	17
	6145	39	-	-	-	-2.936	-3.892	-0.378	-	-	-	-10.07	-9.91	-6.98	-7.357	17
	6385	87	-	-	-	-2.814	-3.443	-0.107	-	-	-	-10.07	-9.91	-6.98	-7.086	17
UNII7	6625	135	-	-	-	-2.853	-2.716	0.226	-	-	-	-10.38	-10.60	-7.48	-7.253	17
	6705	151	-	-	-	-2.603	-3.188	0.124	-	-	-	-10.38	-10.60	-7.48	-7.355	17
	6785	167	-	-	-	-2.157	-3.008	0.448	-	-	-	-10.38	-10.60	-7.48	-7.031	17

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-3.169	-3.760	-0.444	-	-	-	-10.07	-9.91	-6.98	-7.423	17
	6145	39	-	-	-	-2.787	-4.220	-0.434	-	-	-	-10.07	-9.91	-6.98	-7.414	17
	6385	87	-	-	-	-3.281	-3.752	-0.500	-	-	-	-10.07	-9.91	-6.98	-7.479	17
UNII7	6625	135	-	-	-	-2.989	-3.075	-0.021	-	-	-	-10.38	-10.60	-7.48	-7.500	17
	6705	151	-	-	-	-3.072	-3.239	-0.144	-	-	-	-10.38	-10.60	-7.48	-7.623	17
	6785	167	-	-	-	-2.637	-3.177	0.112	-	-	-	-10.38	-10.60	-7.48	-7.367	17

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	9.834	8.629	12.284	10.276	8.657	12.552	9.625	8.766	12.227	-10.07	-9.91	-6.98	5.573	17
	6185	47	9.932	9.670	12.813	9.560	10.072	12.834	9.984	9.791	12.899	-10.07	-9.91	-6.98	5.920	17
	6345	79	10.245	10.285	13.276	10.682	10.097	13.410	10.216	10.482	13.362	-10.07	-9.91	-6.98	6.431	17
UNII7	6665	143	9.928	9.361	12.664	9.975	9.478	12.744	10.393	9.327	12.903	-10.38	-10.60	-7.48	5.424	17

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	7.113	6.320	9.745	7.185	5.884	9.594	6.599	5.845	9.249	-10.07	-9.91	-6.98	2.766	17
	6185	47	6.927	7.057	10.003	6.974	7.047	10.021	7.414	6.960	10.204	-10.07	-9.91	-6.98	3.224	17
	6345	79	7.725	7.818	10.782	7.391	7.442	10.427	7.589	7.617	10.614	-10.07	-9.91	-6.98	3.803	17
UNII7	6665	143	7.470	7.520	10.506	7.560	7.214	10.401	7.618	6.588	10.144	-10.38	-10.60	-7.48	3.027	17

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.923	3.377	6.669	4.618	3.143	6.953	4.330	3.283	6.849	-10.07	-9.91	-6.98	-0.026	17
	6185	47	4.467	4.290	7.390	4.524	4.538	7.542	4.730	4.503	7.629	-10.07	-9.91	-6.98	0.649	17
	6345	79	4.924	4.950	7.948	4.677	4.985	7.844	4.817	4.783	7.811	-10.07	-9.91	-6.98	0.968	17
UNII7	6665	143	4.625	4.465	7.556	4.921	4.140	7.559	4.607	3.829	7.246	-10.38	-10.60	-7.48	0.080	17

Mode: EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	3.595	3.028	6.331	3.672	2.976	6.348	3.718	3.507	6.624	-10.07	-9.91	-6.98	-0.356	17
	6185	47	4.205	3.296	6.784	3.944	3.467	6.722	4.062	3.487	6.794	-10.07	-9.91	-6.98	-0.185	17
	6345	79	4.245	3.789	7.033	4.494	3.593	7.077	3.919	3.819	6.879	-10.07	-9.91	-6.98	0.097	17
UNII7	6665	143	4.078	4.303	7.202	4.363	3.882	7.139	4.425	3.409	6.956	-10.38	-10.60	-7.48	-0.277	17

Mode: EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	0.600	0.254	3.441	-	-	-	0.678	0.516	3.608	-10.07	-9.91	-6.98	-3.371	17
	6185	47	0.848	0.546	3.710	-	-	-	0.970	0.687	3.841	-10.07	-9.91	-6.98	-3.138	17
	6345	79	1.570	0.661	4.150	-	-	-	1.177	0.686	3.949	-10.07	-9.91	-6.98	-2.829	17
UNII7	6665	143	1.140	1.073	4.117	-	-	-	1.336	0.706	4.043	-10.38	-10.60	-7.48	-3.362	17

Mode: EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-3.309	-3.808	-0.541	-	-	-	-10.07	-9.91	-6.98	-7.520	17
	6185	47	-	-	-	-3.039	-3.752	-0.371	-	-	-	-10.07	-9.91	-6.98	-7.350	17
	6345	79	-	-	-	-2.560	-3.068	0.204	-	-	-	-10.07	-9.91	-6.98	-6.776	17
UNII7	6665	143	-	-	-	-2.827	-3.290	-0.042	-	-	-	-10.38	-10.60	-7.48	-7.521	17

Mode: EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	10.106	8.194	12.265	9.799	8.531	12.222	9.999	8.490	12.320	-10.07	-9.91	-6.98	5.341	17
	6185	47	9.955	9.996	12.986	9.942	10.434	13.205	10.079	10.100	13.100	-10.07	-9.91	-6.98	6.226	17
	6345	79	10.237	10.156	13.207	10.254	10.242	13.259	9.970	10.581	13.297	-10.07	-9.91	-6.98	6.317	17
UNII7	6665	143	9.979	9.353	12.688	10.046	9.355	12.725	9.963	9.208	12.612	-10.38	-10.60	-7.48	5.246	17

Mode: EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	7.240	6.420	9.860	7.454	6.150	9.861	7.552	6.228	9.951	-10.07	-9.91	-6.98	2.972	17
	6185	47	7.469	7.222	10.358	7.337	7.087	10.225	7.263	7.260	10.272	-10.07	-9.91	-6.98	3.379	17
	6345	79	7.615	7.443	10.541	7.575	7.547	10.572	7.256	7.163	10.220	-10.07	-9.91	-6.98	3.592	17
UNII7	6665	143	7.901	6.509	10.271	7.301	6.811	10.074	7.380	6.430	9.942	-10.38	-10.60	-7.48	2.792	17

Mode: EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	4.517	3.223	6.929	4.493	3.358	6.973	4.766	3.097	7.022	-10.07	-9.91	-6.98	0.043	17
	6185	47	4.446	4.413	7.440	4.750	4.438	7.607	4.823	4.882	7.863	-10.07	-9.91	-6.98	0.884	17
	6345	79	4.998	4.952	7.986	4.799	5.034	7.929	4.619	4.528	7.584	-10.07	-9.91	-6.98	1.006	17
UNII7	6665	143	4.999	4.135	7.599	4.923	3.955	7.477	4.594	3.598	7.135	-10.38	-10.60	-7.48	0.120	17

Mode: EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.565	3.471	6.528	3.563	3.180	6.386	3.860	2.850	6.394	-10.07	-9.91	-6.98	-0.451	17
	6185	47	4.326	3.547	6.964	3.881	3.751	6.826	4.209	3.694	6.969	-10.07	-9.91	-6.98	-0.010	17
	6345	79	4.109	3.747	6.942	4.280	3.714	7.016	3.818	3.691	6.765	-10.07	-9.91	-6.98	0.037	17
UNII7	6665	143	4.141	3.569	6.874	4.174	3.307	6.772	4.152	3.231	6.726	-10.38	-10.60	-7.48	-0.605	17

Mode: EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	0.881	0.012	3.479	-	-	-	1.082	0.378	3.755	-10.07	-9.91	-6.98	-3.224	17
	6185	47	1.156	0.699	3.944	-	-	-	1.161	0.888	4.037	-10.07	-9.91	-6.98	-2.942	17
	6345	79	1.322	0.846	4.101	-	-	-	0.959	0.748	3.865	-10.07	-9.91	-6.98	-2.878	17
UNII7	6665	143	1.367	0.513	3.972	-	-	-	1.258	0.604	3.954	-10.38	-10.60	-7.48	-3.507	17

Mode: EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-2.607	-4.007	-0.241	-	-	-	-10.07	-9.91	-6.98	-7.220	17
	6185	47	-	-	-	-3.031	-3.377	-0.190	-	-	-	-10.07	-9.91	-6.98	-7.170	17
	6345	79	-	-	-	-2.720	-3.142	0.084	-	-	-	-10.07	-9.91	-6.98	-6.895	17
UNII7	6665	143	-	-	-	-2.721	-3.238	0.038	-	-	-	-10.38	-10.60	-7.48	-7.441	17

Mode: EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-7.600	-8.780	-5.140	-	-	-	-10.07	-9.91	-6.98	-12.119	17
	6185	47	-	-	-	-7.217	-7.744	-4.462	-	-	-	-10.07	-9.91	-6.98	-11.441	17
	6345	79	-	-	-	-7.123	-8.062	-4.557	-	-	-	-10.07	-9.91	-6.98	-11.536	17
UNII7	6665	143	-	-	-	-7.181	-7.707	-4.426	-	-	-	-10.38	-10.60	-7.48	-11.905	17

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-6.991	-8.098	-4.499	-	-	-	-10.07	-9.91	-6.98	-11.479	17
	6185	47	-	-	-	-6.562	-7.183	-3.852	-	-	-	-10.07	-9.91	-6.98	-10.831	17
	6345	79	-	-	-	-6.725	-7.409	-4.044	-	-	-	-10.07	-9.91	-6.98	-11.023	17
UNII7	6665	143	-	-	-	-6.450	-6.740	-3.583	-	-	-	-10.38	-10.60	-7.48	-11.062	17

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	7.763	7.946	10.866	8.397	7.599	11.027	8.864	8.233	11.570	-10.07	-9.91	-6.98	4.591	17
	6265	63	9.361	7.897	11.701	9.327	8.601	11.990	9.228	8.207	11.758	-10.07	-9.91	-6.98	5.010	17
UNII5 52T	6105	31	5.275	5.394	8.345	5.554	4.971	8.283	6.057	5.850	8.965	-10.07	-9.91	-6.98	1.986	17
	6265	63	6.468	5.797	9.156	6.400	5.812	9.126	6.915	5.814	9.410	-10.07	-9.91	-6.98	2.430	17
UNII5 106T	6105	31	2.808	2.863	5.846	2.817	2.331	5.591	3.077	2.755	5.930	-10.07	-9.91	-6.98	-1.050	17
	6265	63	3.934	2.670	6.358	3.985	3.140	6.594	4.254	2.941	6.658	-10.07	-9.91	-6.98	-0.322	17
UNII5 242T	6105	31	3.305	2.471	5.918	3.452	2.518	6.020	3.388	2.617	6.029	-10.07	-9.91	-6.98	-0.950	17
	6265	63	4.448	3.550	7.032	4.713	3.388	7.111	4.971	3.458	7.290	-10.07	-9.91	-6.98	0.311	17
UNII5 484T	6105	31	0.418	-0.371	3.052	-	-	-	0.746	-0.235	3.293	-10.07	-9.91	-6.98	-3.686	17
	6265	63	1.775	0.483	4.187	-	-	-	1.973	0.667	4.379	-10.07	-9.91	-6.98	-2.600	17
UNII5 996T	6105	31	-	-	-	-3.352	-4.162	-0.728	-	-	-	-10.07	-9.91	-6.98	-7.707	17
	6265	63	-	-	-	-2.263	-3.052	0.371	-	-	-	-10.07	-9.91	-6.98	-6.609	17

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	8.324	7.767	11.065	8.804	8.347	11.592	8.127	8.278	11.214	-10.07	-9.91	-6.98	4.613	17
	6265	63	9.161	8.092	11.670	9.378	7.617	11.597	9.424	8.553	12.021	-10.07	-9.91	-6.98	5.041	17
UNII5 52T	6105	31	6.075	5.678	8.892	6.148	5.840	9.007	6.183	6.015	9.110	-10.07	-9.91	-6.98	2.131	17
	6265	63	6.853	5.798	9.368	7.090	6.089	9.629	7.513	6.236	9.932	-10.07	-9.91	-6.98	2.952	17
UNII5 106T	6105	31	2.742	2.386	5.578	3.351	2.574	5.991	3.353	2.934	6.159	-10.07	-9.91	-6.98	-0.820	17
	6265	63	4.113	2.834	6.531	3.750	3.103	6.449	4.404	3.446	6.962	-10.07	-9.91	-6.98	-0.017	17
UNII5 242T	6105	31	3.379	2.751	6.086	3.880	2.774	6.372	4.007	3.161	6.614	-10.07	-9.91	-6.98	-0.365	17
	6265	63	4.572	3.569	7.109	4.970	3.736	7.407	4.985	3.940	7.504	-10.07	-9.91	-6.98	0.524	17
UNII5 484T	6105	31	1.265	0.007	3.692	-	-	-	1.079	0.291	3.713	-10.07	-9.91	-6.98	-3.266	17
	6265	63	2.011	1.195	4.632	-	-	-	2.276	1.155	4.762	-10.07	-9.91	-6.98	-2.218	17
UNII5 996T	6105	31	-	-	-	-2.784	-3.896	-0.294	-	-	-	-10.07	-9.91	-6.98	-7.274	17
	6265	63	-	-	-	-1.790	-2.601	0.834	-	-	-	-10.07	-9.91	-6.98	-6.146	17

Mode: EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	8.659	8.236	11.463	9.170	8.563	11.888	8.989	8.107	11.581	-10.07	-9.91	-6.98	4.908	17
	6265	63	9.423	8.763	12.116	9.651	8.945	12.323	9.049	8.919	11.995	-10.07	-9.91	-6.98	5.343	17
UNII5 52T	6105	31	6.581	5.852	9.242	6.008	6.185	9.108	6.001	5.465	8.752	-10.07	-9.91	-6.98	2.263	17
	6265	63	7.036	6.181	9.640	6.818	6.360	9.606	6.784	5.891	9.371	-10.07	-9.91	-6.98	2.661	17
UNII5 106T	6105	31	3.087	2.720	5.918	3.579	3.093	6.353	3.425	2.734	6.104	-10.07	-9.91	-6.98	-0.626	17
	6265	63	4.198	3.149	6.716	3.918	3.471	6.711	3.792	2.998	6.424	-10.07	-9.91	-6.98	-0.264	17
UNII5 242T	6105	31	3.781	2.965	6.402	3.734	2.918	6.355	4.008	3.399	6.724	-10.07	-9.91	-6.98	-0.255	17
	6265	63	4.899	4.063	7.511	4.494	3.895	7.215	4.735	3.955	7.372	-10.07	-9.91	-6.98	0.532	17
UNII5 484T	6105	31	0.915	0.073	3.525	-	-	-	1.337	0.352	3.883	-10.07	-9.91	-6.98	-3.097	17
	6265	63	1.760	1.115	4.460	-	-	-	1.895	1.236	4.588	-10.07	-9.91	-6.98	-2.391	17
UNII5 996T	6105	31	-	-	-	-2.595	-3.650	-0.080	-	-	-	-10.07	-9.91	-6.98	-7.060	17
	6265	63	-	-	-	-1.750	-2.325	0.982	-	-	-	-10.07	-9.91	-6.98	-5.997	17

Mode: EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 26T	6105	31	9.245	8.448	11.875	9.058	8.277	11.696	9.212	8.496	11.879	-10.07	-9.91	-6.98	4.900	17
	6265	63	9.221	8.720	11.988	9.131	8.602	11.885	8.817	8.711	11.775	-10.07	-9.91	-6.98	5.009	17
UNII5 52T	6105	31	6.350	5.763	9.077	6.365	5.865	9.133	6.800	6.438	9.633	-10.07	-9.91	-6.98	2.654	17
	6265	63	6.706	6.352	9.543	6.545	5.967	9.276	6.645	6.424	9.546	-10.07	-9.91	-6.98	2.567	17
UNII5 106T	6105	31	3.006	3.067	6.047	3.317	3.154	6.247	3.959	3.369	6.685	-10.07	-9.91	-6.98	-0.295	17
	6265	63	4.171	3.158	6.705	3.826	3.376	6.617	3.357	3.078	6.230	-10.07	-9.91	-6.98	-0.275	17
UNII5 242T	6105	31	3.935	3.433	6.701	3.747	3.138	6.463	4.080	3.529	6.823	-10.07	-9.91	-6.98	-0.156	17
	6265	63	4.735	3.825	7.314	4.277	4.043	7.171	4.500	3.734	7.144	-10.07	-9.91	-6.98	0.334	17
UNII5 484T	6105	31	1.079	0.306	3.720	-	-	-	1.174	0.389	3.809	-10.07	-9.91	-6.98	-3.170	17
	6265	63	2.058	1.009	4.575	-	-	-	1.554	0.917	4.257	-10.07	-9.91	-6.98	-2.404	17
UNII5 996T	6105	31	-	-	-	-2.930	-3.836	-0.349	-	-	-	-10.07	-9.91	-6.98	-7.329	17
	6265	63	-	-	-	-2.347	-2.813	0.436	-	-	-	-10.07	-9.91	-6.98	-6.543	17

Mode: EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 160L	6105	31	-	-	-	-7.000	-7.930	-4.430	-	-	-	-10.07	-9.91	-6.98	-11.409	17
	6265	63	-	-	-	-5.805	-7.306	-3.480	-	-	-	-10.07	-9.91	-6.98	-10.460	17
UNII5 160U	6105	31	-	-	-	-7.113	-7.367	-4.228	-	-	-	-10.07	-9.91	-6.98	-11.207	17
	6265	63	-	-	-	-6.369	-7.008	-3.666	-	-	-	-10.07	-9.91	-6.98	-10.646	17

Mode: EHT320

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 4x996T	6105	31	-	-	-	-10.613	-11.035	-7.808	-	-	-	-10.07	-9.91	-6.98	-14.788	17
	6265	63	-	-	-	-9.476	-10.388	-6.898	-	-	-	-10.07	-9.91	-6.98	-13.877	17
UNII5 SU	6105	31	-	-	-	-9.428	-10.051	-6.718	-	-	-	-10.07	-9.91	-6.98	-13.697	17
	6265	63	-	-	-	-8.325	-9.565	-5.890	-	-	-	-10.07	-9.91	-6.98	-12.870	17

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-2.779	-2.720	0.261	-	-	-	-10.07	-9.91	-6.98	-6.718	17
	6175	45	-	-	-	4.805	4.485	7.658	-	-	-	-10.07	-9.91	-6.98	0.679	17
	6415	93	-	-	-	4.811	3.725	7.312	-	-	-	-10.07	-9.91	-6.98	0.333	17
UNII7	6535	117	-	-	-	4.720	4.582	7.662	-	-	-	-10.38	-10.60	-7.48	0.183	17
	6695	149	-	-	-	4.595	4.222	7.423	-	-	-	-10.38	-10.60	-7.48	-0.056	17
	6855	181	-	-	-	4.971	4.400	7.705	-	-	-	-10.38	-10.60	-7.48	0.226	17

[MRU]

Mode: EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	5.661	5.929	8.807	5.513	5.732	8.634	5.672	5.890	8.793	-10.07	-9.91	-6.98	1.828	17
	6175	45	6.194	6.070	9.143	6.272	6.061	9.178	6.327	6.337	9.342	-10.07	-9.91	-6.98	2.363	17
	6415	93	6.305	6.425	9.376	6.237	6.390	9.324	6.245	6.325	9.295	-10.07	-9.91	-6.98	2.396	17
UNII7	6535	117	5.995	6.198	9.108	5.815	6.280	9.064	6.150	6.593	9.387	-10.38	-10.60	-7.48	1.908	17
	6695	149	6.641	6.247	9.459	6.404	6.559	9.492	6.608	6.421	9.526	-10.38	-10.60	-7.48	2.047	17
	6855	181	6.611	5.924	9.291	6.355	5.810	9.101	6.244	5.821	9.048	-10.38	-10.60	-7.48	1.812	17

Mode: EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-0.750	-1.009	2.133	-	-	-	-0.695	-1.030	2.151	-10.07	-9.91	-6.98	-4.828	17
	6165	43	4.104	4.229	7.178	-	-	-	4.412	3.983	7.213	-10.07	-9.91	-6.98	0.234	17
	6405	91	4.255	4.439	7.359	-	-	-	4.219	4.303	7.272	-10.07	-9.91	-6.98	0.379	17
UNII7	6565	123	3.829	4.093	6.974	-	-	-	4.168	4.276	7.233	-10.38	-10.60	-7.48	-0.246	17
	6685	147	4.712	4.104	7.429	-	-	-	4.397	4.049	7.237	-10.38	-10.60	-7.48	-0.050	17
	6845	179	4.333	3.691	7.035	-	-	-	4.427	3.715	7.096	-10.38	-10.60	-7.48	-0.383	17

Mode: EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	6.208	5.491	8.874	5.874	5.428	8.667	6.399	5.136	8.823	-10.07	-9.91	-6.98	1.895	17
	6165	43	6.069	5.854	8.973	6.395	5.532	8.995	6.229	5.767	9.014	-10.07	-9.91	-6.98	2.035	17
	6405	91	6.401	5.890	9.163	6.133	6.134	9.144	6.437	6.119	9.291	-10.07	-9.91	-6.98	2.312	17
UNII7	6565	123	6.531	6.367	9.460	6.108	6.219	9.174	6.432	6.541	9.497	-10.38	-10.60	-7.48	2.018	17
	6685	147	6.453	6.452	9.463	6.400	6.062	9.244	6.337	6.256	9.307	-10.38	-10.60	-7.48	1.984	17
	6845	179	6.704	5.952	9.354	6.357	5.867	9.129	6.604	6.123	9.380	-10.38	-10.60	-7.48	1.901	17

Mode: EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	3.859	3.118	6.514	3.803	2.774	6.329	4.137	2.964	6.600	-10.07	-9.91	-6.98	-0.379	17
	6165	43	3.859	3.754	6.817	3.815	3.285	6.568	4.050	3.723	6.900	-10.07	-9.91	-6.98	-0.080	17
	6405	91	4.111	3.719	6.930	4.007	3.719	6.875	4.382	3.695	7.062	-10.07	-9.91	-6.98	0.083	17
UNII7	6565	123	4.093	4.369	7.243	3.981	4.095	7.048	4.306	3.985	7.159	-10.38	-10.60	-7.48	-0.236	17
	6685	147	4.426	3.990	7.224	4.147	3.808	6.991	4.203	3.852	7.041	-10.38	-10.60	-7.48	-0.255	17
	6845	179	4.235	3.826	7.045	4.104	3.309	6.735	4.160	3.651	6.923	-10.38	-10.60	-7.48	-0.434	17

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	5.941	4.910	8.467	6.037	4.955	8.540	6.348	5.052	8.759	-10.07	-9.91	-6.98	1.779	17
	6145	39	5.850	5.425	8.653	6.122	5.329	8.754	6.280	5.665	8.994	-10.07	-9.91	-6.98	2.015	17
	6385	87	6.444	5.936	9.208	6.175	5.995	9.096	6.041	6.140	9.101	-10.07	-9.91	-6.98	2.229	17
UNII7	6625	135	6.123	6.258	9.202	6.037	6.260	9.160	6.145	5.795	8.984	-10.38	-10.60	-7.48	1.723	17
	6705	151	6.358	5.843	9.119	6.095	5.761	8.942	6.389	5.839	9.133	-10.38	-10.60	-7.48	1.654	17
	6785	167	6.375	5.754	9.086	6.207	5.840	9.038	6.436	5.868	9.172	-10.38	-10.60	-7.48	1.693	17

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	3.886	2.851	6.409	3.805	2.513	6.217	3.941	2.655	6.356	-10.07	-9.91	-6.98	-0.570	17
	6145	39	3.574	3.240	6.420	3.764	3.210	6.506	4.028	3.391	6.731	-10.07	-9.91	-6.98	-0.248	17
	6385	87	3.938	3.598	6.781	3.844	3.692	6.779	3.815	3.897	6.866	-10.07	-9.91	-6.98	-0.113	17
UNII7	6625	135	3.977	4.114	7.056	3.745	3.841	6.803	3.835	3.806	6.831	-10.38	-10.60	-7.48	-0.423	17
	6705	151	4.082	3.681	6.896	3.832	3.501	6.680	3.899	3.274	6.608	-10.38	-10.60	-7.48	-0.583	17
	6785	167	4.132	3.778	6.969	4.103	3.750	6.940	4.398	3.759	7.100	-10.38	-10.60	-7.48	-0.379	17

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-0.245	-1.024	2.393	-0.379	-0.897	2.380	-0.473	-0.863	2.346	-10.07	-9.91	-6.98	-4.587	17
	6145	39	-0.269	-0.813	2.477	-0.381	-1.213	2.233	-0.339	-0.940	2.381	-10.07	-9.91	-6.98	-4.502	17
	6385	87	-0.316	-1.130	2.306	-0.326	-0.900	2.406	-0.465	-1.269	2.161	-10.07	-9.91	-6.98	-4.573	17
UNII7	6625	135	-0.222	-0.246	2.776	-0.303	-0.081	2.819	-0.298	0.011	2.869	-10.38	-10.60	-7.48	-4.610	17
	6705	151	-0.314	-0.631	2.540	-0.315	-0.462	2.622	-0.010	-0.406	2.806	-10.38	-10.60	-7.48	-4.673	17
	6785	167	-0.126	-0.468	2.716	0.053	-0.543	2.775	-0.155	-0.585	2.645	-10.38	-10.60	-7.48	-4.704	17

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	5.211	4.352	7.813	5.385	4.169	7.830	5.630	4.215	7.990	-10.07	-9.91	-6.98	1.011	17
	6185	47	5.836	5.586	8.723	5.916	5.786	8.862	5.741	5.876	8.819	-10.07	-9.91	-6.98	1.882	17
	6345	79	6.248	5.856	9.067	6.392	6.001	9.211	6.093	6.038	9.076	-10.07	-9.91	-6.98	2.232	17
UNII7	6665	143	5.917	5.508	8.727	5.974	5.124	8.580	6.201	5.301	8.784	-10.38	-10.60	-7.48	1.305	17

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.403	2.260	5.880	3.656	2.384	6.077	3.742	2.691	6.259	-10.07	-9.91	-6.98	-0.720	17
	6185	47	3.764	3.387	6.590	3.885	3.349	6.636	4.034	3.519	6.795	-10.07	-9.91	-6.98	-0.185	17
	6345	79	4.388	3.684	7.061	4.518	4.052	7.302	4.218	3.875	7.061	-10.07	-9.91	-6.98	0.323	17
UNII7	6665	143	3.655	3.141	6.416	3.865	3.213	6.562	3.980	3.063	6.556	-10.38	-10.60	-7.48	-0.917	17

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-0.722	-1.452	1.938	-0.856	-1.494	1.847	-0.750	-1.531	1.887	-10.07	-9.91	-6.98	-5.041	17
	6185	47	-0.233	-1.087	2.371	-0.632	-0.913	2.240	-0.598	-0.656	2.383	-10.07	-9.91	-6.98	-4.596	17
	6345	79	-0.253	-0.828	2.479	-0.120	-0.942	2.498	-0.331	-0.947	2.382	-10.07	-9.91	-6.98	-4.481	17
UNII7	6665	143	-0.392	-0.722	2.456	-0.381	-0.799	2.425	-0.200	-1.022	2.418	-10.38	-10.60	-7.48	-5.023	17

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	5.640	4.469	8.104	5.456	4.509	8.018	5.458	4.448	7.992	-10.07	-9.91	-6.98	1.125	17
	6185	47	5.505	5.613	8.569	5.774	6.189	8.997	6.140	5.677	8.925	-10.07	-9.91	-6.98	2.017	17
	6345	79	5.936	5.930	8.943	6.023	6.023	9.033	5.693	5.614	8.664	-10.07	-9.91	-6.98	2.054	17
UNII7	6665	143	6.101	5.125	8.650	5.943	5.097	8.551	6.015	4.519	8.341	-10.38	-10.60	-7.48	1.171	17

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	3.445	2.352	5.943	3.522	2.220	5.930	3.588	2.360	6.028	-10.07	-9.91	-6.98	-0.951	17
	6185	47	3.731	3.699	6.726	3.770	3.345	6.573	3.646	3.627	6.647	-10.07	-9.91	-6.98	-0.254	17
	6345	79	4.078	3.717	6.912	3.930	3.892	6.922	3.423	3.790	6.621	-10.07	-9.91	-6.98	-0.058	17
UNII7	6665	143	4.107	3.176	6.677	3.692	2.653	6.214	3.731	2.939	6.364	-10.38	-10.60	-7.48	-0.802	17

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-0.687	-1.087	2.128	-0.720	-1.141	2.085	-0.833	-1.712	1.760	-10.07	-9.91	-6.98	-4.852	17
	6185	47	-0.371	-0.917	2.375	-0.409	-0.918	2.354	-0.472	-1.060	2.254	-10.07	-9.91	-6.98	-4.605	17
	6345	79	-0.393	-0.927	2.358	-0.404	-0.990	2.323	-0.693	-0.932	2.199	-10.07	-9.91	-6.98	-4.621	17
UNII7	6665	143	-0.287	-1.197	2.292	-0.142	-1.230	2.358	-0.499	-1.080	2.230	-10.38	-10.60	-7.48	-5.121	17

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.660	-5.512	-2.055	-4.874	-5.563	-2.195	-4.832	-5.726	-2.246	-10.07	-9.91	-6.98	-9.035	17
	6185	47	-4.599	-5.004	-1.787	-4.520	-4.977	-1.733	-4.538	-5.264	-1.876	-10.07	-9.91	-6.98	-8.712	17
	6345	79	-4.397	-4.624	-1.499	-4.530	-4.704	-1.606	-4.116	-4.886	-1.474	-10.07	-9.91	-6.98	-8.453	17
UNII7	6665	143	-4.156	-4.784	-1.449	-4.299	-4.692	-1.481	-4.445	-4.667	-1.545	-10.38	-10.60	-7.48	-8.928	17

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.383	-6.059	-2.697	-5.178	-6.249	-2.670	-5.238	-6.221	-2.691	-10.07	-9.91	-6.98	-9.650	17
	6185	47	-5.211	-5.796	-2.483	-5.034	-5.994	-2.477	-4.985	-5.806	-2.366	-10.07	-9.91	-6.98	-9.345	17
	6345	79	-5.104	-5.483	-2.279	-4.980	-5.468	-2.207	-5.041	-5.292	-2.154	-10.07	-9.91	-6.98	-9.134	17
UNII7	6665	143	-4.967	-5.379	-2.158	-4.604	-5.333	-1.943	-4.925	-5.428	-2.159	-10.38	-10.60	-7.48	-9.422	17

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	3.840	3.889	6.875	4.166	3.565	6.886	3.950	3.582	6.780	-10.07	-9.91	-6.98	-0.093	17
	6265	63	5.065	3.739	7.462	5.229	4.069	7.698	5.185	4.157	7.711	-10.07	-9.91	-6.98	0.732	17
UNII5 106T+26T	6105	31	1.939	1.981	4.970	2.110	1.797	4.966	2.290	2.023	5.169	-10.07	-9.91	-6.98	-1.811	17
	6265	63	2.812	1.694	5.299	3.319	2.242	5.824	3.435	1.858	5.728	-10.07	-9.91	-6.98	-1.155	17
UNII5 484T+242T	6105	31	-0.919	-1.811	1.668	-0.886	-1.763	1.708	-1.119	-2.001	1.472	-10.07	-9.91	-6.98	-5.272	17
	6265	63	0.272	-1.019	2.684	0.033	-1.135	2.498	0.358	-1.139	2.684	-10.07	-9.91	-6.98	-4.295	17

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	4.191	3.742	6.982	5.049	4.709	7.892	4.825	3.950	7.420	-10.07	-9.91	-6.98	0.913	17
	6265	63	5.602	4.102	7.927	5.317	4.118	7.769	5.626	4.686	8.191	-10.07	-9.91	-6.98	1.212	17
UNII5 106T+26T	6105	31	2.045	1.563	4.821	2.887	2.185	5.560	2.635	1.926	5.305	-10.07	-9.91	-6.98	-1.419	17
	6265	63	3.054	1.936	5.541	2.967	2.536	5.767	3.437	2.754	6.119	-10.07	-9.91	-6.98	-0.860	17
UNII5 484T+242T	6105	31	-0.426	-1.402	2.123	-0.179	-1.306	2.304	-0.569	-1.389	2.050	-10.07	-9.91	-6.98	-4.675	17
	6265	63	0.522	-0.072	3.245	0.626	0.005	3.337	0.449	-0.565	2.982	-10.07	-9.91	-6.98	-3.643	17

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	4.547	4.253	7.413	4.884	3.916	7.437	4.674	3.758	7.250	-10.07	-9.91	-6.98	0.458	17
	6265	63	5.741	4.622	8.228	5.279	4.561	7.945	4.814	4.545	7.692	-10.07	-9.91	-6.98	1.248	17
UNII5 106T+26T	6105	31	2.746	2.072	5.432	2.288	1.904	5.110	2.464	2.365	5.425	-10.07	-9.91	-6.98	-1.547	17
	6265	63	3.450	2.519	6.019	3.358	2.361	5.898	2.836	2.342	5.606	-10.07	-9.91	-6.98	-0.960	17
UNII5 484T+242T	6105	31	-0.410	-1.382	2.141	-0.058	-0.785	2.604	-0.507	-1.304	2.123	-10.07	-9.91	-6.98	-4.376	17
	6265	63	0.553	-0.082	3.257	0.761	-0.224	3.306	0.479	-0.114	3.203	-10.07	-9.91	-6.98	-3.673	17

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	4.790	4.113	7.475	4.590	4.236	7.427	4.590	4.555	7.583	-10.07	-9.91	-6.98	0.603	17
	6265	63	5.076	4.446	7.782	5.230	4.383	7.837	4.576	4.245	7.424	-10.07	-9.91	-6.98	0.858	17
UNII5 106T+26T	6105	31	2.603	2.480	5.552	2.883	1.762	5.369	2.680	2.181	5.448	-10.07	-9.91	-6.98	-1.427	17
	6265	63	2.946	2.434	5.708	2.818	2.469	5.657	2.759	2.539	5.660	-10.07	-9.91	-6.98	-1.272	17
UNII5 484T+242T	6105	31	-0.662	-1.121	2.125	-0.717	-1.434	1.949	-0.665	-1.230	2.072	-10.07	-9.91	-6.98	-4.855	17
	6265	63	-0.173	-0.705	2.579	-0.046	-0.562	2.714	-0.148	-0.724	2.584	-10.07	-9.91	-6.98	-4.266	17

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 160L	6105	31	-4.154	-5.223	-1.645	-3.683	-5.212	-1.370	-4.655	-5.539	-2.064	-10.07	-9.91	-6.98	-8.350	17
	6265	63	-2.751	-4.092	-0.360	-3.018	-4.089	-0.510	-3.330	-4.586	-0.902	-10.07	-9.91	-6.98	-7.339	17
UNII5 160U	6105	31	-4.507	-5.110	-1.788	-4.220	-4.546	-1.370	-4.229	-4.585	-1.393	-10.07	-9.91	-6.98	-8.349	17
	6265	63	-3.738	-4.052	-0.882	-3.155	-3.613	-0.368	-3.319	-3.867	-0.574	-10.07	-9.91	-6.98	-7.347	17

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 3x996T	6105	31	-8.005	-8.045	-5.015	-7.874	-8.375	-5.107	-8.137	-8.682	-5.391	-10.07	-9.91	-6.98	-11.994	17
	6265	63	-6.916	-7.850	-4.348	-6.670	-7.753	-4.168	-6.940	-8.151	-4.493	-10.07	-9.91	-6.98	-11.147	17
UNII5 2x996T+484T	6105	31	-6.989	-7.713	-4.326	-7.103	-7.718	-4.390	-7.209	-7.667	-4.422	-10.07	-9.91	-6.98	-11.305	17
	6265	63	-6.321	-7.028	-3.650	-5.657	-7.004	-3.269	-6.050	-6.812	-3.404	-10.07	-9.91	-6.98	-10.248	17
UNII5 3x996T+484T	6105	31	-9.485	-10.440	-6.926	-9.318	-9.931	-6.603	-9.568	-10.355	-6.933	-10.07	-9.91	-6.98	-13.583	17
	6265	63	-9.060	-9.739	-6.376	-8.305	-9.910	-6.023	-8.108	-9.877	-5.893	-10.07	-9.91	-6.98	-12.872	17

10.4.3 Very Low Power Device

Very Low Power Device Limit : -5 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 9 and the maximum gain of each band in the antenna gain table were applied.

10.4.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode: EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index: Low			RU Index: Mid			RU Index: High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-6.885	-8.170	-4.470	-8.262	-9.501	-5.827	-6.847	-8.361	-4.528	-10.07	-9.91	-6.98	-11.449	-5
	6175	45	-7.314	-7.453	-4.372	-8.299	-8.933	-5.594	-7.561	-7.449	-4.494	-10.07	-9.91	-6.98	-11.352	-5
UNII6	6415	93	-7.496	-7.814	-4.642	-8.999	-9.058	-6.018	-7.664	-8.027	-4.831	-10.07	-9.91	-6.98	-11.621	-5
	6435	97	-7.669	-7.839	-4.743	-8.921	-9.260	-6.077	-7.639	-7.854	-4.735	-10.38	-10.60	-7.48	-12.214	-5
	6475	105	-7.588	-8.303	-4.920	-9.220	-9.387	-6.292	-7.831	-8.287	-5.043	-10.38	-10.60	-7.48	-12.399	-5
	6515	113	-7.711	-8.303	-4.986	-8.980	-9.507	-6.225	-7.508	-8.109	-4.788	-10.38	-10.60	-7.48	-12.267	-5
	6535	117	-7.788	-8.200	-4.979	-9.125	-9.199	-6.151	-7.733	-8.270	-4.983	-10.38	-10.60	-7.48	-12.458	-5
UNII7	6695	149	-7.371	-8.281	-4.792	-9.044	-9.841	-6.414	-7.672	-8.034	-4.839	-10.38	-10.60	-7.48	-12.271	-5
	6855	181	-7.259	-8.737	-4.925	-8.731	-9.859	-6.248	-7.085	-8.454	-4.705	-10.38	-10.60	-7.48	-12.184	-5
UNII8	6875	185	-7.282	-8.736	-4.938	-8.813	-10.023	-6.365	-7.294	-8.581	-4.880	-10.50	-10.12	-7.30	-12.177	-5
	6995	209	-7.112	-8.452	-4.720	-8.548	-9.836	-6.134	-7.001	-8.275	-4.581	-10.50	-10.12	-7.30	-11.879	-5
	7115	233	-6.750	-9.726	-4.977	-8.140	-11.338	-6.441	-6.674	-9.917	-4.989	-10.50	-10.12	-7.30	-12.275	-5

Mode: EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-6.932	-8.429	-4.606	-7.312	-8.848	-5.002	-7.012	-8.441	-4.657	-10.07	-9.91	-6.98	-11.585	-5
	6175	45	-7.130	-7.983	-4.525	-7.362	-7.932	-4.627	-7.236	-7.800	-4.498	-10.07	-9.91	-6.98	-11.478	-5
	6415	93	-7.349	-7.688	-4.505	-7.831	-7.886	-4.848	-7.223	-7.540	-4.368	-10.07	-9.91	-6.98	-11.347	-5
UNII6	6435	97	-7.268	-7.644	-4.441	-7.525	-7.667	-4.585	-7.376	-7.596	-4.474	-10.38	-10.60	-7.48	-11.920	-5
	6475	105	-7.518	-7.937	-4.712	-7.719	-7.949	-4.822	-7.394	-7.660	-4.514	-10.38	-10.60	-7.48	-11.993	-5
	6515	113	-7.513	-7.474	-4.483	-7.705	-8.036	-4.857	-7.421	-7.931	-4.658	-10.38	-10.60	-7.48	-11.962	-5
UNII7	6535	117	-7.477	-8.075	-4.755	-7.908	-8.243	-5.062	-7.424	-7.959	-4.673	-10.38	-10.60	-7.48	-12.152	-5
	6695	149	-7.066	-7.737	-4.378	-7.549	-7.791	-4.658	-7.391	-7.948	-4.650	-10.38	-10.60	-7.48	-11.857	-5
	6855	181	-7.144	-8.150	-4.607	-7.335	-8.360	-4.807	-6.985	-7.989	-4.448	-10.38	-10.60	-7.48	-11.927	-5
UNII8	6875	185	-7.026	-8.208	-4.566	-7.171	-8.545	-4.793	-7.215	-8.070	-4.611	-10.50	-10.12	-7.30	-11.864	-5
	6995	209	-7.211	-8.608	-4.843	-7.470	-8.540	-4.962	-7.188	-8.540	-4.801	-10.50	-10.12	-7.30	-12.099	-5
	7115	233	-6.436	-9.773	-4.781	-6.582	-9.971	-4.943	-6.505	-9.746	-4.819	-10.50	-10.12	-7.30	-12.079	-5

Mode: EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-7.002	-8.688	-4.753	-	-	-	-7.124	-8.971	-4.940	-10.07	-9.91	-6.98	-11.733	-5
	6175	45	-7.709	-8.499	-5.076	-	-	-	-7.675	-8.360	-4.994	-10.07	-9.91	-6.98	-11.973	-5
	6415	93	-8.494	-8.556	-5.515	-	-	-	-8.492	-8.606	-5.538	-10.07	-9.91	-6.98	-12.494	-5
UNII6	6435	97	-8.580	-8.212	-5.382	-	-	-	-8.642	-8.297	-5.456	-10.38	-10.60	-7.48	-12.861	-5
	6475	105	-8.446	-8.524	-5.474	-	-	-	-8.509	-8.319	-5.403	-10.38	-10.60	-7.48	-12.882	-5
	6515	113	-8.824	-8.207	-5.494	-	-	-	-8.818	-8.614	-5.704	-10.38	-10.60	-7.48	-12.973	-5
UNII7	6535	117	-8.450	-8.206	-5.316	-	-	-	-8.526	-8.239	-5.370	-10.38	-10.60	-7.48	-12.795	-5
	6695	149	-7.674	-8.526	-5.069	-	-	-	-8.167	-8.422	-5.282	-10.38	-10.60	-7.48	-12.548	-5
	6855	181	-7.858	-9.057	-5.406	-	-	-	-7.919	-9.061	-5.442	-10.38	-10.60	-7.48	-12.885	-5
UNII8	6875	185	-8.167	-8.741	-5.434	-	-	-	-7.844	-9.058	-5.398	-10.50	-10.12	-7.30	-12.696	-5
	6995	209	-7.856	-8.526	-5.168	-	-	-	-7.777	-8.628	-5.171	-10.50	-10.12	-7.30	-12.465	-5
	7115	233	-6.917	-8.745	-4.725	-	-	-	-6.995	-8.836	-4.808	-10.50	-10.12	-7.30	-12.023	-5

Mode: EHT20 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-7.371	-7.268	-4.309	-	-	-	-10.07	-9.91	-6.98	-11.288	-5
	6175	45	-	-	-	-6.144	-6.118	-3.120	-	-	-	-10.07	-9.91	-6.98	-10.100	-5
	6415	93	-	-	-	-5.960	-6.404	-3.166	-	-	-	-10.07	-9.91	-6.98	-10.145	-5
UNII6	6435	97	-	-	-	-5.937	-7.327	-3.566	-	-	-	-10.38	-10.60	-7.48	-11.045	-5
	6475	105	-	-	-	-6.610	-7.946	-4.216	-	-	-	-10.38	-10.60	-7.48	-11.695	-5
	6515	113	-	-	-	-6.937	-7.559	-4.226	-	-	-	-10.38	-10.60	-7.48	-11.705	-5
UNII7	6535	117	-	-	-	-6.902	-7.424	-4.145	-	-	-	-10.38	-10.60	-7.48	-11.624	-5
	6695	149	-	-	-	-6.506	-6.769	-3.625	-	-	-	-10.38	-10.60	-7.48	-11.104	-5
	6855	181	-	-	-	-6.357	-6.946	-3.631	-	-	-	-10.38	-10.60	-7.48	-11.110	-5
UNII8	6875	185	-	-	-	-6.715	-6.794	-3.744	-	-	-	-10.50	-10.12	-7.30	-11.041	-5
	6995	209	-	-	-	-6.616	-6.733	-3.664	-	-	-	-10.50	-10.12	-7.30	-10.961	-5
	7115	233	-	-	-	-6.615	-7.329	-3.947	-	-	-	-10.50	-10.12	-7.30	-11.244	-5

Mode: EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-7.875	-8.012	-4.932	-	-	-	-10.07	-9.91	-6.98	-11.912	-5
	6175	45	-	-	-	-6.682	-6.787	-3.724	-	-	-	-10.07	-9.91	-6.98	-10.703	-5
	6415	93	-	-	-	-6.698	-6.946	-3.810	-	-	-	-10.07	-9.91	-6.98	-10.789	-5
UNII6	6435	97	-	-	-	-6.430	-7.958	-4.116	-	-	-	-10.38	-10.60	-7.48	-11.595	-5
	6475	105	-	-	-	-7.085	-8.307	-4.643	-	-	-	-10.38	-10.60	-7.48	-12.122	-5
	6515	113	-	-	-	-7.437	-7.645	-4.529	-	-	-	-10.38	-10.60	-7.48	-12.008	-5
UNII7	6535	117	-	-	-	-7.276	-7.821	-4.529	-	-	-	-10.38	-10.60	-7.48	-12.008	-5
	6695	149	-	-	-	-6.904	-7.153	-4.016	-	-	-	-10.38	-10.60	-7.48	-11.495	-5
	6855	181	-	-	-	-6.912	-7.433	-4.154	-	-	-	-10.38	-10.60	-7.48	-11.633	-5
UNII8	6875	185	-	-	-	-7.171	-7.260	-4.205	-	-	-	-10.50	-10.12	-7.30	-11.502	-5
	6995	209	-	-	-	-6.726	-7.144	-3.919	-	-	-	-10.50	-10.12	-7.30	-11.217	-5
	7115	233	-	-	-	-7.004	-7.481	-4.225	-	-	-	-10.50	-10.12	-7.30	-11.523	-5

Mode: EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.392	-8.708	-4.990	-7.363	-8.770	-4.999	-7.136	-8.227	-4.637	-10.07	-9.91	-6.98	-11.616	-5
	6165	43	-7.047	-7.506	-4.260	-7.668	-7.441	-4.542	-7.358	-7.388	-4.362	-10.07	-9.91	-6.98	-11.239	-5
	6405	91	-7.732	-7.853	-4.781	-7.942	-8.011	-4.966	-7.367	-7.712	-4.525	-10.07	-9.91	-6.98	-11.505	-5
UNII6	6445	99	-7.403	-7.937	-4.651	-7.671	-7.738	-4.694	-7.268	-8.132	-4.668	-10.38	-10.60	-7.48	-12.130	-5
	6485	107	-7.688	-8.065	-4.862	-7.727	-8.140	-4.918	-7.246	-8.221	-4.696	-10.38	-10.60	-7.48	-12.175	-5
	6525	115	-7.641	-8.229	-4.914	-7.615	-8.440	-4.997	-7.512	-8.206	-4.834	-10.38	-10.60	-7.48	-12.313	-5
UNII7	6565	123	-7.468	-7.815	-4.627	-7.788	-8.344	-5.046	-7.466	-7.934	-4.683	-10.38	-10.60	-7.48	-12.106	-5
	6685	147	-7.588	-7.910	-4.735	-7.868	-8.098	-4.971	-7.722	-7.599	-4.649	-10.38	-10.60	-7.48	-12.128	-5
	6845	179	-7.148	-8.545	-4.780	-7.835	-8.749	-5.257	-7.368	-8.156	-4.733	-10.38	-10.60	-7.48	-12.212	-5
UNII8	6885	187	-7.283	-8.582	-4.873	-7.688	-8.446	-5.040	-7.228	-8.416	-4.771	-10.50	-10.12	-7.30	-12.068	-5
	7005	211	-6.872	-8.234	-4.489	-7.206	-8.298	-4.707	-7.186	-8.217	-4.660	-10.50	-10.12	-7.30	-11.787	-5
	7085	227	-6.887	-10.349	-5.271	-7.029	-10.407	-5.387	-7.035	-10.256	-5.343	-10.50	-10.12	-7.30	-12.569	-5

Mode: EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-6.994	-8.185	-4.538	-7.336	-8.535	-4.884	-6.994	-7.969	-4.444	-10.07	-9.91	-6.98	-11.423	-5
	6165	43	-6.850	-7.131	-3.978	-7.151	-7.445	-4.285	-6.982	-7.048	-4.004	-10.07	-9.91	-6.98	-10.957	-5
	6405	91	-7.644	-7.695	-4.659	-7.889	-7.843	-4.855	-7.390	-7.685	-4.524	-10.07	-9.91	-6.98	-11.504	-5
UNII6	6445	99	-7.355	-7.672	-4.500	-7.620	-7.813	-4.705	-7.335	-7.689	-4.498	-10.38	-10.60	-7.48	-11.977	-5
	6485	107	-7.369	-7.935	-4.632	-7.784	-7.797	-4.780	-7.518	-7.746	-4.620	-10.38	-10.60	-7.48	-12.099	-5
	6525	115	-7.647	-7.737	-4.681	-7.664	-8.065	-4.849	-7.321	-8.118	-4.691	-10.38	-10.60	-7.48	-12.160	-5
UNII7	6565	123	-7.435	-8.040	-4.716	-7.714	-8.233	-4.955	-7.395	-7.913	-4.636	-10.38	-10.60	-7.48	-12.115	-5
	6685	147	-7.272	-7.561	-4.404	-7.498	-7.640	-4.558	-7.171	-7.216	-4.183	-10.38	-10.60	-7.48	-11.662	-5
	6845	179	-6.900	-7.677	-4.261	-7.352	-8.154	-4.724	-7.258	-7.976	-4.592	-10.38	-10.60	-7.48	-11.740	-5
UNII8	6885	187	-7.076	-8.243	-4.610	-7.195	-8.174	-4.646	-7.228	-8.255	-4.701	-10.50	-10.12	-7.30	-11.908	-5
	7005	211	-6.363	-7.938	-4.069	-6.757	-8.251	-4.430	-6.756	-8.089	-4.361	-10.50	-10.12	-7.30	-11.367	-5
	7085	227	-6.690	-10.008	-5.029	-6.988	-10.221	-5.300	-7.072	-10.208	-5.352	-10.50	-10.12	-7.30	-12.327	-5

Mode: EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-6.857	-8.603	-4.632	-7.090	-8.945	-4.909	-6.921	-8.850	-4.769	-10.07	-9.91	-6.98	-11.612	-5
	6165	43	-7.706	-8.270	-4.968	-7.786	-8.517	-5.126	-7.214	-8.237	-4.685	-10.07	-9.91	-6.98	-11.664	-5
	6405	91	-8.230	-8.459	-5.333	-8.731	-8.610	-5.660	-8.507	-8.402	-5.444	-10.07	-9.91	-6.98	-12.312	-5
UNII6	6445	99	-8.513	-8.509	-5.501	-8.606	-8.285	-5.432	-8.380	-8.320	-5.340	-10.38	-10.60	-7.48	-12.819	-5
	6485	107	-8.435	-8.197	-5.304	-8.514	-8.210	-5.349	-8.690	-8.376	-5.520	-10.38	-10.60	-7.48	-12.783	-5
	6525	115	-8.410	-8.531	-5.460	-8.988	-8.592	-5.775	-8.405	-8.504	-5.444	-10.38	-10.60	-7.48	-12.923	-5
UNII7	6565	123	-8.285	-8.367	-5.315	-8.474	-8.460	-5.457	-8.417	-8.470	-5.433	-10.38	-10.60	-7.48	-12.794	-5
	6685	147	-8.103	-8.205	-5.143	-8.310	-8.601	-5.443	-8.164	-8.313	-5.227	-10.38	-10.60	-7.48	-12.622	-5
	6845	179	-7.506	-8.908	-5.140	-7.756	-9.061	-5.349	-7.861	-9.027	-5.395	-10.38	-10.60	-7.48	-12.619	-5
UNII8	6885	187	-7.883	-9.012	-5.401	-8.353	-9.297	-5.789	-8.093	-9.068	-5.543	-10.50	-10.12	-7.30	-12.698	-5
	7005	211	-7.666	-8.469	-5.039	-7.791	-8.841	-5.274	-7.404	-8.419	-4.872	-10.50	-10.12	-7.30	-12.169	-5
	7085	227	-6.733	-9.313	-4.824	-6.866	-9.149	-4.849	-6.761	-8.854	-4.672	-10.50	-10.12	-7.30	-11.970	-5

Mode: EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-6.783	-7.519	-4.126	-	-	-	-6.412	-7.562	-3.939	-10.07	-9.91	-6.98	-10.918	-5
	6165	43	-6.647	-6.490	-3.558	-	-	-	-6.642	-6.440	-3.530	-10.07	-9.91	-6.98	-10.509	-5
	6405	91	-6.411	-6.534	-3.462	-	-	-	-6.309	-6.529	-3.408	-10.07	-9.91	-6.98	-10.387	-5
UNII6	6445	99	-6.070	-7.456	-3.698	-	-	-	-6.205	-7.286	-3.702	-10.38	-10.60	-7.48	-11.177	-5
	6485	107	-6.850	-7.491	-4.149	-	-	-	-6.907	-7.527	-4.196	-10.38	-10.60	-7.48	-11.628	-5
	6525	115	-7.099	-7.068	-4.074	-	-	-	-6.968	-7.618	-4.271	-10.38	-10.60	-7.48	-11.553	-5
UNII7	6565	123	-6.876	-6.861	-3.859	-	-	-	-6.720	-6.808	-3.754	-10.38	-10.60	-7.48	-11.233	-5
	6685	147	-6.742	-6.854	-3.788	-	-	-	-6.941	-6.853	-3.887	-10.38	-10.60	-7.48	-11.267	-5
	6845	179	-6.564	-7.090	-3.809	-	-	-	-6.563	-6.793	-3.667	-10.38	-10.60	-7.48	-11.146	-5
UNII8	6885	187	-6.619	-6.880	-3.738	-	-	-	-6.846	-6.905	-3.866	-10.50	-10.12	-7.30	-11.035	-5
	7005	211	-6.509	-6.904	-3.692	-	-	-	-6.481	-6.888	-3.670	-10.50	-10.12	-7.30	-10.967	-5
	7085	227	-6.763	-6.983	-3.862	-	-	-	-6.915	-6.807	-3.851	-10.50	-10.12	-7.30	-11.148	-5

Mode: EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-7.006	-7.700	-4.329	-	-	-	-10.07	-9.91	-6.98	-11.308	-5
	6165	43	-	-	-	-6.152	-7.122	-3.600	-	-	-	-10.07	-9.91	-6.98	-10.579	-5
	6405	91	-	-	-	-6.693	-6.781	-3.726	-	-	-	-10.07	-9.91	-6.98	-10.706	-5
UNII6	6445	99	-	-	-	-6.470	-7.740	-4.048	-	-	-	-10.38	-10.60	-7.48	-11.527	-5
	6485	107	-	-	-	-6.386	-7.015	-3.679	-	-	-	-10.38	-10.60	-7.48	-11.158	-5
	6525	115	-	-	-	-6.415	-6.852	-3.618	-	-	-	-10.38	-10.60	-7.48	-11.097	-5
UNII7	6565	123	-	-	-	-6.821	-6.364	-3.576	-	-	-	-10.38	-10.60	-7.48	-11.055	-5
	6685	147	-	-	-	-6.482	-6.652	-3.556	-	-	-	-10.38	-10.60	-7.48	-11.035	-5
	6845	179	-	-	-	-5.892	-6.611	-3.226	-	-	-	-10.38	-10.60	-7.48	-10.705	-5
UNII8	6885	187	-	-	-	-6.045	-6.756	-3.376	-	-	-	-10.50	-10.12	-7.30	-10.673	-5
	7005	211	-	-	-	-6.099	-6.391	-3.232	-	-	-	-10.50	-10.12	-7.30	-10.530	-5
	7085	227	-	-	-	-6.416	-6.746	-3.567	-	-	-	-10.50	-10.12	-7.30	-10.865	-5

Mode: EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-7.388	-7.994	-4.670	-	-	-	-10.07	-9.91	-6.98	-11.649	-5
	6165	43	-	-	-	-6.789	-7.405	-4.076	-	-	-	-10.07	-9.91	-6.98	-11.055	-5
	6405	91	-	-	-	-6.978	-7.316	-4.133	-	-	-	-10.07	-9.91	-6.98	-11.113	-5
UNII6	6445	99	-	-	-	-6.998	-8.098	-4.503	-	-	-	-10.38	-10.60	-7.48	-11.982	-5
	6485	107	-	-	-	-6.890	-7.592	-4.216	-	-	-	-10.38	-10.60	-7.48	-11.695	-5
	6525	115	-	-	-	-6.763	-7.180	-3.956	-	-	-	-10.38	-10.60	-7.48	-11.435	-5
UNII7	6565	123	-	-	-	-7.072	-6.684	-3.863	-	-	-	-10.38	-10.60	-7.48	-11.342	-5
	6685	147	-	-	-	-6.558	-6.819	-3.676	-	-	-	-10.38	-10.60	-7.48	-11.155	-5
	6845	179	-	-	-	-6.304	-7.132	-3.688	-	-	-	-10.38	-10.60	-7.48	-11.167	-5
UNII8	6885	187	-	-	-	-6.535	-7.193	-3.841	-	-	-	-10.50	-10.12	-7.30	-11.139	-5
	7005	211	-	-	-	-6.555	-6.796	-3.663	-	-	-	-10.50	-10.12	-7.30	-10.961	-5
	7085	227	-	-	-	-6.945	-7.118	-4.020	-	-	-	-10.50	-10.12	-7.30	-11.318	-5

Mode: EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-7.146	-8.603	-4.803	-7.551	-8.767	-5.106	-7.377	-8.071	-4.700	-10.07	-9.91	-6.98	-11.679	-5
	6145	39	-6.864	-7.773	-4.284	-7.521	-8.692	-5.057	-7.577	-8.862	-5.162	-10.07	-9.91	-6.98	-11.264	-5
	6385	87	-8.560	-9.148	-5.834	-8.370	-8.487	-5.418	-8.287	-8.308	-5.287	-10.07	-9.91	-6.98	-12.266	-5
UNII6	6465	103	-8.061	-8.826	-5.416	-8.278	-8.539	-5.396	-8.150	-8.365	-5.246	-10.38	-10.60	-7.48	-12.725	-5
	6545	119	-8.318	-8.772	-5.529	-8.231	-9.337	-5.738	-8.500	-8.636	-5.557	-10.38	-10.60	-7.48	-13.008	-5
UNII7	6625	135	-8.480	-8.262	-5.359	-8.549	-8.824	-5.674	-7.945	-8.538	-5.221	-10.38	-10.60	-7.48	-12.700	-5
	6705	151	-8.212	-8.751	-5.463	-8.347	-8.626	-5.474	-8.426	-8.784	-5.591	-10.38	-10.60	-7.48	-12.942	-5
	6785	167	-8.548	-9.177	-5.841	-8.178	-9.328	-5.705	-8.254	-9.420	-5.787	-10.38	-10.60	-7.48	-13.184	-5
UNII8	6865	183	-8.365	-8.940	-5.632	-7.880	-9.452	-5.585	-7.872	-9.223	-5.485	-10.50	-10.12	-7.30	-12.782	-5
	6945	199	-7.646	-8.282	-4.942	-7.642	-8.811	-5.177	-7.292	-8.778	-4.961	-10.50	-10.12	-7.30	-12.239	-5
	7025	215	-6.527	-8.579	-4.422	-7.092	-9.036	-4.946	-7.090	-8.825	-4.861	-10.50	-10.12	-7.30	-11.720	-5

Mode: EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-6.533	-8.291	-4.313	-6.642	-7.912	-4.221	-6.857	-8.179	-4.458	-10.07	-9.91	-6.98	-11.200	-5
	6145	39	-6.975	-8.040	-4.465	-6.878	-8.286	-4.515	-6.514	-7.934	-4.156	-10.07	-9.91	-6.98	-11.135	-5
	6385	87	-8.187	-8.280	-5.223	-7.826	-8.253	-5.024	-8.099	-8.080	-5.079	-10.07	-9.91	-6.98	-12.003	-5
UNII6	6465	103	-7.770	-8.066	-4.905	-7.647	-8.093	-4.854	-7.706	-7.522	-4.603	-10.38	-10.60	-7.48	-12.082	-5
	6545	119	-7.641	-8.385	-4.987	-7.935	-8.468	-5.183	-7.781	-8.341	-5.042	-10.38	-10.60	-7.48	-12.466	-5
UNII7	6625	135	-7.825	-7.757	-4.781	-8.017	-7.847	-4.921	-7.631	-7.859	-4.733	-10.38	-10.60	-7.48	-12.212	-5
	6705	151	-7.694	-8.090	-4.877	-8.011	-8.164	-5.077	-7.753	-7.972	-4.851	-10.38	-10.60	-7.48	-12.330	-5
	6785	167	-8.035	-9.029	-5.493	-7.671	-8.571	-5.087	-7.647	-8.489	-5.037	-10.38	-10.60	-7.48	-12.516	-5
UNII8	6865	183	-7.329	-8.350	-4.799	-7.741	-8.169	-4.939	-7.592	-8.573	-5.045	-10.50	-10.12	-7.30	-12.097	-5
	6945	199	-7.324	-8.028	-4.652	-7.511	-8.123	-4.796	-7.354	-8.013	-4.661	-10.50	-10.12	-7.30	-11.949	-5
	7025	215	-6.766	-9.100	-4.768	-6.712	-9.241	-4.785	-7.425	-9.087	-5.167	-10.50	-10.12	-7.30	-12.065	-5

Mode: EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-7.017	-8.846	-4.826	-7.219	-9.615	-5.244	-7.219	-9.310	-5.130	-10.07	-9.91	-6.98	-11.805	-5
	6145	39	-7.716	-9.141	-5.360	-7.788	-9.215	-5.433	-7.456	-9.201	-5.231	-10.07	-9.91	-6.98	-12.211	-5
	6385	87	-9.069	-9.394	-6.218	-8.915	-9.239	-6.064	-8.919	-9.127	-6.012	-10.07	-9.91	-6.98	-12.991	-5
UNII6	6465	103	-8.983	-9.012	-5.987	-9.012	-8.933	-5.962	-8.958	-8.855	-5.896	-10.38	-10.60	-7.48	-13.375	-5
	6545	119	-8.556	-8.871	-5.701	-8.834	-8.821	-5.817	-8.816	-8.625	-5.709	-10.38	-10.60	-7.48	-13.180	-5
UNII7	6625	135	-8.086	-8.820	-5.427	-8.569	-9.069	-5.802	-8.130	-8.749	-5.418	-10.38	-10.60	-7.48	-12.897	-5
	6705	151	-8.469	-8.682	-5.564	-8.788	-9.090	-5.926	-8.964	-9.077	-6.010	-10.38	-10.60	-7.48	-13.043	-5
	6785	167	-8.359	-9.309	-5.798	-8.520	-9.393	-5.924	-8.494	-9.173	-5.810	-10.38	-10.60	-7.48	-13.277	-5
UNII8	6865	183	-8.156	-9.555	-5.789	-8.536	-9.641	-6.043	-8.425	-9.296	-5.829	-10.50	-10.12	-7.30	-13.087	-5
	6945	199	-7.589	-8.982	-5.220	-8.011	-8.909	-5.427	-7.923	-8.679	-5.274	-10.50	-10.12	-7.30	-12.517	-5
	7025	215	-7.110	-9.387	-5.091	-7.734	-8.829	-5.237	-7.765	-8.663	-5.181	-10.50	-10.12	-7.30	-12.388	-5

Mode: EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-6.714	-7.880	-4.248	-6.523	-7.855	-4.128	-6.549	-7.922	-4.172	-10.07	-9.91	-6.98	-11.108	-5
	6145	39	-6.587	-6.783	-3.674	-6.852	-6.899	-3.866	-6.606	-6.488	-3.537	-10.07	-9.91	-6.98	-10.516	-5
	6385	87	-6.580	-6.781	-3.669	-6.522	-6.577	-3.540	-6.690	-6.474	-3.571	-10.07	-9.91	-6.98	-10.519	-5
UNII6	6465	103	-6.748	-8.174	-4.393	-6.833	-8.115	-4.417	-6.900	-7.764	-4.301	-10.38	-10.60	-7.48	-11.780	-5
	6545	119	-7.183	-7.657	-4.404	-6.906	-7.709	-4.279	-7.149	-7.683	-4.398	-10.38	-10.60	-7.48	-11.758	-5
UNII7	6625	135	-6.357	-7.168	-3.734	-6.944	-7.234	-4.077	-6.802	-7.411	-4.086	-10.38	-10.60	-7.48	-11.213	-5
	6705	151	-6.760	-6.971	-3.854	-7.010	-7.018	-4.004	-7.030	-7.142	-4.076	-10.38	-10.60	-7.48	-11.333	-5
	6785	167	-6.732	-8.097	-4.351	-6.610	-8.029	-4.252	-6.745	-7.950	-4.296	-10.38	-10.60	-7.48	-11.731	-5
UNII8	6865	183	-6.860	-7.331	-4.079	-7.015	-7.199	-4.096	-7.087	-6.919	-3.992	-10.50	-10.12	-7.30	-11.290	-5
	6945	199	-6.378	-7.253	-3.784	-6.626	-7.171	-3.880	-6.448	-6.761	-3.592	-10.50	-10.12	-7.30	-10.889	-5
	7025	215	-6.687	-7.492	-4.061	-6.640	-7.338	-3.965	-6.742	-7.287	-3.996	-10.50	-10.12	-7.30	-11.263	-5

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-6.982	-7.790	-4.357	-	-	-	-6.866	-7.875	-4.331	-10.07	-9.91	-6.98	-11.310	-5
	6145	39	-6.665	-7.294	-3.957	-	-	-	-6.456	-7.215	-3.808	-10.07	-9.91	-6.98	-10.788	-5
	6385	87	-6.611	-6.882	-3.734	-	-	-	-6.677	-6.836	-3.745	-10.07	-9.91	-6.98	-10.713	-5
UNII6	6465	103	-6.806	-7.885	-4.301	-	-	-	-6.731	-7.706	-4.181	-10.38	-10.60	-7.48	-11.660	-5
	6545	119	-6.379	-7.194	-3.757	-	-	-	-6.328	-7.248	-3.753	-10.38	-10.60	-7.48	-11.232	-5
UNII7	6625	135	-6.841	-6.531	-3.673	-	-	-	-6.890	-6.692	-3.779	-10.38	-10.60	-7.48	-11.152	-5
	6705	151	-6.602	-6.783	-3.681	-	-	-	-6.530	-7.010	-3.753	-10.38	-10.60	-7.48	-11.160	-5
	6785	167	-6.404	-7.335	-3.834	-	-	-	-6.072	-7.302	-3.633	-10.38	-10.60	-7.48	-11.112	-5
UNII8	6865	183	-6.210	-7.076	-3.611	-	-	-	-6.503	-6.790	-3.633	-10.50	-10.12	-7.30	-10.908	-5
	6945	199	-5.722	-6.682	-3.165	-	-	-	-5.839	-6.736	-3.254	-10.50	-10.12	-7.30	-10.462	-5
	7025	215	-6.123	-6.898	-3.483	-	-	-	-6.297	-6.645	-3.457	-10.50	-10.12	-7.30	-10.754	-5

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-6.575	-7.808	-4.138	-	-	-	-10.07	-9.91	-6.98	-11.117	-5
	6145	39	-	-	-	-6.580	-7.318	-3.923	-	-	-	-10.07	-9.91	-6.98	-10.903	-5
	6385	87	-	-	-	-6.612	-7.174	-3.874	-	-	-	-10.07	-9.91	-6.98	-10.853	-5
UNII6	6465	103	-	-	-	-6.761	-7.439	-4.077	-	-	-	-10.38	-10.60	-7.48	-11.556	-5
	6545	119	-	-	-	-6.373	-7.342	-3.821	-	-	-	-10.38	-10.60	-7.48	-11.300	-5
UNII7	6625	135	-	-	-	-6.916	-6.861	-3.878	-	-	-	-10.38	-10.60	-7.48	-11.357	-5
	6705	151	-	-	-	-6.450	-6.449	-3.439	-	-	-	-10.38	-10.60	-7.48	-10.918	-5
	6785	167	-	-	-	-6.381	-7.844	-4.041	-	-	-	-10.38	-10.60	-7.48	-11.520	-5
UNII8	6865	183	-	-	-	-6.305	-6.743	-3.508	-	-	-	-10.50	-10.12	-7.30	-10.806	-5
	6945	199	-	-	-	-5.994	-6.590	-3.272	-	-	-	-10.50	-10.12	-7.30	-10.569	-5
	7025	215	-	-	-	-6.271	-6.932	-3.579	-	-	-	-10.50	-10.12	-7.30	-10.877	-5

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-7.015	-7.985	-4.463	-	-	-	-10.07	-9.91	-6.98	-11.442	-5
	6145	39	-	-	-	-6.812	-7.655	-4.203	-	-	-	-10.07	-9.91	-6.98	-11.182	-5
	6385	87	-	-	-	-6.750	-7.244	-3.980	-	-	-	-10.07	-9.91	-6.98	-10.959	-5
UNII6	6465	103	-	-	-	-6.660	-7.768	-4.168	-	-	-	-10.38	-10.60	-7.48	-11.647	-5
	6545	119	-	-	-	-6.739	-7.576	-4.127	-	-	-	-10.38	-10.60	-7.48	-11.606	-5
UNII7	6625	135	-	-	-	-7.119	-6.979	-4.038	-	-	-	-10.38	-10.60	-7.48	-11.517	-5
	6705	151	-	-	-	-6.560	-6.571	-3.555	-	-	-	-10.38	-10.60	-7.48	-11.034	-5
	6785	167	-	-	-	-6.676	-8.221	-4.370	-	-	-	-10.38	-10.60	-7.48	-11.849	-5
UNII8	6865	183	-	-	-	-6.567	-7.095	-3.813	-	-	-	-10.50	-10.12	-7.30	-11.110	-5
	6945	199	-	-	-	-6.333	-7.013	-3.649	-	-	-	-10.50	-10.12	-7.30	-10.947	-5
	7025	215	-	-	-	-6.499	-7.320	-3.880	-	-	-	-10.50	-10.12	-7.30	-11.177	-5

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.101	-9.541	-5.751	-7.577	-9.001	-5.220	-7.971	-9.359	-5.599	-10.07	-9.91	-6.98	-12.200	-5
	6185	47	-9.002	-8.600	-5.786	-7.747	-8.434	-5.066	-7.946	-7.986	-4.955	-10.07	-9.91	-6.98	-11.935	-5
	6345	79	-8.247	-8.865	-5.535	-8.368	-9.042	-5.681	-8.553	-9.155	-5.833	-10.07	-9.91	-6.98	-12.514	-5
UNII6	6505	111	-8.906	-9.387	-6.129	-8.738	-9.236	-5.969	-8.683	-8.663	-5.662	-10.38	-10.60	-7.48	-13.141	-5
UNII7	6665	143	-8.823	-8.716	-5.759	-8.592	-8.500	-5.535	-8.141	-8.715	-5.408	-10.38	-10.60	-7.48	-12.887	-5
UNII8	6825	175	-8.752	-9.253	-5.985	-8.260	-9.216	-5.701	-8.475	-8.837	-5.642	-10.50	-10.12	-7.30	-12.939	-5
	6985	207	-8.096	-9.407	-5.692	-8.087	-9.566	-5.753	-8.245	-9.630	-5.872	-10.50	-10.12	-7.30	-12.989	-5

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.810	-9.059	-5.379	-7.620	-8.882	-5.195	-7.877	-8.801	-5.304	-10.07	-9.91	-6.98	-12.174	-5
	6185	47	-7.866	-8.081	-4.961	-7.646	-7.859	-4.740	-7.600	-7.672	-4.625	-10.07	-9.91	-6.98	-11.604	-5
	6345	79	-8.049	-8.273	-5.149	-8.287	-8.329	-5.297	-8.109	-8.981	-5.512	-10.07	-9.91	-6.98	-12.128	-5
UNII6	6505	111	-8.348	-8.802	-5.558	-8.003	-8.873	-5.406	-8.259	-8.539	-5.386	-10.38	-10.60	-7.48	-12.865	-5
UNII7	6665	143	-8.230	-8.366	-5.287	-8.018	-7.922	-4.959	-8.281	-8.070	-5.163	-10.38	-10.60	-7.48	-12.438	-5
UNII8	6825	175	-8.377	-8.714	-5.532	-7.888	-8.593	-5.215	-7.946	-8.765	-5.326	-10.50	-10.12	-7.30	-12.513	-5
	6985	207	-7.307	-8.787	-4.974	-7.262	-8.961	-5.018	-8.082	-8.882	-5.453	-10.50	-10.12	-7.30	-12.271	-5

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.117	-8.917	-5.488	-7.526	-8.681	-5.055	-7.742	-8.766	-5.213	-10.07	-9.91	-6.98	-12.034	-5
	6185	47	-8.464	-8.811	-5.623	-8.167	-8.236	-5.191	-7.727	-8.340	-5.012	-10.07	-9.91	-6.98	-11.991	-5
	6345	79	-8.279	-8.716	-5.481	-8.058	-8.878	-5.438	-8.317	-8.370	-5.333	-10.07	-9.91	-6.98	-12.312	-5
UNII6	6505	111	-8.738	-8.586	-5.651	-8.596	-8.729	-5.651	-8.783	-8.184	-5.463	-10.38	-10.60	-7.48	-12.942	-5
UNII7	6665	143	-8.333	-8.626	-5.466	-8.096	-8.698	-5.376	-8.123	-8.602	-5.345	-10.38	-10.60	-7.48	-12.824	-5
UNII8	6825	175	-7.859	-9.027	-5.393	-8.095	-9.152	-5.581	-7.954	-8.899	-5.390	-10.50	-10.12	-7.30	-12.688	-5
	6985	207	-7.404	-9.448	-5.296	-7.852	-9.217	-5.470	-8.098	-9.100	-5.560	-10.50	-10.12	-7.30	-12.594	-5

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-6.757	-7.876	-4.271	-6.559	-7.974	-4.199	-6.454	-7.821	-4.074	-10.07	-9.91	-6.98	-11.053	-5
	6185	47	-6.730	-7.280	-3.986	-6.760	-7.086	-3.910	-6.502	-6.902	-3.688	-10.07	-9.91	-6.98	-10.667	-5
	6345	79	-6.609	-6.981	-3.781	-6.807	-6.961	-3.873	-6.767	-6.832	-3.790	-10.07	-9.91	-6.98	-10.761	-5
UNII6	6505	111	-7.092	-7.898	-4.467	-7.200	-8.218	-4.669	-7.421	-7.723	-4.560	-10.38	-10.60	-7.48	-11.946	-5
UNII7	6665	143	-7.035	-7.423	-4.215	-7.039	-7.991	-4.479	-6.839	-7.935	-4.343	-10.38	-10.60	-7.48	-11.694	-5
UNII8	6825	175	-6.508	-7.130	-3.798	-6.634	-7.358	-3.971	-6.317	-7.007	-3.638	-10.50	-10.12	-7.30	-10.936	-5
	6985	207	-6.731	-7.054	-3.880	-6.638	-6.951	-3.782	-7.226	-7.093	-4.149	-10.50	-10.12	-7.30	-11.079	-5

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.242	-8.061	-4.622	-	-	-	-6.760	-8.244	-4.428	-10.07	-9.91	-6.98	-11.408	-5
	6185	47	-6.652	-7.306	-3.956	-	-	-	-6.383	-7.108	-3.720	-10.07	-9.91	-6.98	-10.699	-5
	6345	79	-6.473	-6.540	-3.496	-	-	-	-6.581	-6.875	-3.715	-10.07	-9.91	-6.98	-10.475	-5
UNII6	6505	111	-6.730	-7.149	-3.924	-	-	-	-6.686	-7.034	-3.846	-10.38	-10.60	-7.48	-11.325	-5
UNII7	6665	143	-6.923	-7.676	-4.273	-	-	-	-6.767	-7.736	-4.214	-10.38	-10.60	-7.48	-11.693	-5
UNII8	6825	175	-6.200	-6.796	-3.477	-	-	-	-6.249	-6.998	-3.597	-10.50	-10.12	-7.30	-10.775	-5
	6985	207	-6.295	-7.293	-3.755	-	-	-	-6.479	-7.174	-3.802	-10.50	-10.12	-7.30	-11.052	-5

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-6.924	-7.898	-4.374	-	-	-	-10.07	-9.91	-6.98	-11.353	-5
	6185	47	-	-	-	-6.605	-7.280	-3.919	-	-	-	-10.07	-9.91	-6.98	-10.898	-5
	6345	79	-	-	-	-6.316	-6.925	-3.600	-	-	-	-10.07	-9.91	-6.98	-10.579	-5
UNII6	6505	111	-	-	-	-6.721	-7.403	-4.038	-	-	-	-10.38	-10.60	-7.48	-11.517	-5
UNII7	6665	143	-	-	-	-6.525	-7.605	-4.021	-	-	-	-10.38	-10.60	-7.48	-11.500	-5
UNII8	6825	175	-	-	-	-6.081	-6.780	-3.406	-	-	-	-10.50	-10.12	-7.30	-10.704	-5
	6985	207	-	-	-	-6.466	-7.322	-3.863	-	-	-	-10.50	-10.12	-7.30	-11.160	-5

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.781	-8.937	-5.310	-7.500	-9.053	-5.197	-8.392	-9.832	-6.042	-10.07	-9.91	-6.98	-12.176	-5
	6185	47	-8.439	-8.865	-5.636	-8.394	-8.597	-5.484	-8.300	-9.503	-5.849	-10.07	-9.91	-6.98	-12.463	-5
	6345	79	-8.362	-9.019	-5.668	-8.776	-9.192	-5.969	-9.015	-9.540	-6.259	-10.07	-9.91	-6.98	-12.647	-5
UNII6	6505	111	-8.771	-9.100	-5.922	-8.423	-9.260	-5.811	-8.601	-9.240	-5.898	-10.38	-10.60	-7.48	-13.290	-5
UNII7	6665	143	-7.985	-8.499	-5.224	-8.308	-8.924	-5.595	-9.088	-8.823	-5.943	-10.38	-10.60	-7.48	-12.703	-5
UNII8	6825	175	-8.817	-9.439	-6.106	-8.819	-10.254	-6.467	-9.125	-9.867	-6.470	-10.50	-10.12	-7.30	-13.404	-5
	6985	207	-7.620	-9.401	-5.409	-8.478	-9.409	-5.908	-9.002	-10.027	-6.474	-10.50	-10.12	-7.30	-12.707	-5

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.083	-8.793	-4.844	-7.262	-8.922	-5.002	-7.733	-9.123	-5.362	-10.07	-9.91	-6.98	-11.823	-5
	6185	47	-7.330	-7.924	-4.606	-7.967	-8.335	-5.136	-7.536	-8.488	-4.975	-10.07	-9.91	-6.98	-11.585	-5
	6345	79	-7.722	-8.702	-5.174	-8.026	-8.836	-5.401	-8.402	-9.147	-5.748	-10.07	-9.91	-6.98	-12.153	-5
UNII6	6505	111	-8.052	-8.362	-5.194	-7.940	-8.601	-5.247	-8.375	-8.901	-5.619	-10.38	-10.60	-7.48	-12.673	-5
UNII7	6665	143	-7.968	-8.153	-5.049	-8.203	-7.962	-5.070	-8.417	-8.846	-5.615	-10.38	-10.60	-7.48	-12.528	-5
UNII8	6825	175	-8.131	-9.083	-5.570	-8.011	-9.095	-5.509	-8.548	-9.706	-6.078	-10.50	-10.12	-7.30	-12.806	-5
	6985	207	-7.867	-9.127	-5.441	-7.746	-8.920	-5.283	-8.247	-9.587	-5.855	-10.50	-10.12	-7.30	-12.580	-5

Mode: EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.860	-8.836	-5.310	-7.685	-9.308	-5.410	-7.956	-9.391	-5.604	-10.07	-9.91	-6.98	-12.289	-5
	6185	47	-7.740	-8.512	-5.098	-7.575	-8.672	-5.078	-7.923	-8.529	-5.205	-10.07	-9.91	-6.98	-12.058	-5
	6345	79	-8.106	-8.658	-5.363	-8.068	-8.283	-5.164	-8.520	-8.778	-5.636	-10.07	-9.91	-6.98	-12.143	-5
UNII6	6505	111	-8.596	-8.531	-5.553	-8.440	-8.859	-5.634	-8.947	-8.804	-5.864	-10.38	-10.60	-7.48	-13.032	-5
UNII7	6665	143	-8.130	-8.568	-5.333	-8.567	-8.859	-5.700	-8.841	-9.396	-6.099	-10.38	-10.60	-7.48	-12.812	-5
UNII8	6825	175	-7.896	-9.148	-5.466	-8.661	-9.253	-5.936	-9.337	-9.509	-6.411	-10.50	-10.12	-7.30	-12.764	-5
	6985	207	-8.268	-8.974	-5.596	-8.373	-8.145	-5.247	-8.595	-8.541	-5.557	-10.50	-10.12	-7.30	-12.544	-5

Mode: EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.530	-7.650	-4.044	-6.628	-7.903	-4.209	-6.516	-7.758	-4.083	-10.07	-9.91	-6.98	-11.023	-5
	6185	47	-6.634	-6.825	-3.719	-6.705	-6.903	-3.793	-6.568	-6.664	-3.606	-10.07	-9.91	-6.98	-10.585	-5
	6345	79	-7.105	-7.102	-4.094	-6.963	-7.073	-4.008	-7.196	-6.959	-4.066	-10.07	-9.91	-6.98	-10.987	-5
UNII6	6505	111	-7.430	-7.953	-4.674	-7.119	-7.959	-4.509	-7.035	-7.707	-4.348	-10.38	-10.60	-7.48	-11.827	-5
UNII7	6665	143	-6.723	-8.116	-4.354	-6.873	-7.933	-4.361	-7.014	-8.621	-4.734	-10.38	-10.60	-7.48	-11.833	-5
UNII8	6825	175	-6.495	-7.549	-3.980	-6.697	-7.333	-3.994	-6.792	-7.438	-4.093	-10.50	-10.12	-7.30	-11.278	-5
	6985	207	-7.243	-6.963	-4.091	-7.095	-6.946	-4.010	-7.142	-7.041	-4.081	-10.50	-10.12	-7.30	-11.308	-5

Mode: EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.795	-8.238	-4.446	-	-	-	-6.688	-8.146	-4.345	-10.07	-9.91	-6.98	-11.325	-5
	6185	47	-6.607	-6.989	-3.783	-	-	-	-6.596	-6.975	-3.771	-10.07	-9.91	-6.98	-10.750	-5
	6345	79	-6.667	-6.933	-3.787	-	-	-	-6.795	-6.732	-3.753	-10.07	-9.91	-6.98	-10.732	-5
UNII6	6505	111	-6.577	-7.164	-3.850	-	-	-	-6.570	-7.310	-3.914	-10.38	-10.60	-7.48	-11.329	-5
UNII7	6665	143	-6.639	-7.761	-4.153	-	-	-	-6.775	-7.875	-4.280	-10.38	-10.60	-7.48	-11.632	-5
UNII8	6825	175	-6.301	-7.061	-3.654	-	-	-	-6.300	-7.146	-3.692	-10.50	-10.12	-7.30	-10.951	-5
	6985	207	-6.642	-7.175	-3.890	-	-	-	-6.385	-7.025	-3.683	-10.50	-10.12	-7.30	-10.980	-5

Mode: EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-6.823	-7.951	-4.340	-	-	-	-10.07	-9.91	-6.98	-11.320	-5
	6185	47	-	-	-	-6.788	-7.316	-4.034	-	-	-	-10.07	-9.91	-6.98	-11.013	-5
	6345	79	-	-	-	-6.691	-7.044	-3.854	-	-	-	-10.07	-9.91	-6.98	-10.833	-5
UNII6	6505	111	-	-	-	-6.772	-7.492	-4.107	-	-	-	-10.38	-10.60	-7.48	-11.586	-5
UNII7	6665	143	-	-	-	-6.660	-7.990	-4.264	-	-	-	-10.38	-10.60	-7.48	-11.743	-5
UNII8	6825	175	-	-	-	-6.071	-7.019	-3.509	-	-	-	-10.50	-10.12	-7.30	-10.807	-5
	6985	207	-	-	-	-6.782	-7.358	-4.050	-	-	-	-10.50	-10.12	-7.30	-11.348	-5

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-10.336	-11.665	-7.939	-	-	-	-10.07	-9.91	-6.98	-14.919	-5
	6185	47	-	-	-	-10.259	-10.790	-7.506	-	-	-	-10.07	-9.91	-6.98	-14.485	-5
	6345	79	-	-	-	-10.178	-10.511	-7.331	-	-	-	-10.07	-9.91	-6.98	-14.310	-5
UNII6	6505	111	-	-	-	-10.194	-11.072	-7.600	-	-	-	-10.38	-10.60	-7.48	-15.079	-5
UNII7	6665	143	-	-	-	-10.242	-11.456	-7.796	-	-	-	-10.38	-10.60	-7.48	-15.275	-5
UNII8	6825	175	-	-	-	-9.686	-10.447	-7.039	-	-	-	-10.50	-10.12	-7.30	-14.337	-5
	6985	207	-	-	-	-10.086	-10.843	-7.438	-	-	-	-10.50	-10.12	-7.30	-14.735	-5

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-10.049	-11.073	-7.521	-	-	-	-10.07	-9.91	-6.98	-14.500	-5
	6185	47	-	-	-	-9.457	-10.359	-6.875	-	-	-	-10.07	-9.91	-6.98	-13.854	-5
	6345	79	-	-	-	-9.698	-9.858	-6.767	-	-	-	-10.07	-9.91	-6.98	-13.747	-5
UNII6	6505	111	-	-	-	-9.828	-10.567	-7.172	-	-	-	-10.38	-10.60	-7.48	-14.651	-5
UNII7	6665	143	-	-	-	-9.597	-10.819	-7.155	-	-	-	-10.38	-10.60	-7.48	-14.634	-5
UNII8	6825	175	-	-	-	-9.000	-9.746	-6.347	-	-	-	-10.50	-10.12	-7.30	-13.645	-5
	6985	207	-	-	-	-9.480	-10.274	-6.849	-	-	-	-10.50	-10.12	-7.30	-14.147	-5

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.841	-11.035	-7.387	-9.948	-10.445	-7.179	-9.298	-10.569	-6.877	-10.07	-9.91	-6.98	-13.856	-5
	6265	63	-9.432	-10.062	-6.725	-10.071	-9.330	-6.674	-9.420	-9.343	-6.371	-10.07	-9.91	-6.98	-13.350	-5
UNII6	6425	95	-9.430	-9.896	-6.646	-9.505	-9.391	-6.437	-9.698	-9.843	-6.759	-10.38	-10.60	-7.48	-13.916	-5
	6585	127	-9.877	-10.457	-7.147	-10.198	-10.628	-7.397	-9.679	-9.948	-6.801	-10.38	-10.60	-7.48	-14.280	-5
UNII8	6745	159	-9.847	-10.526	-7.163	-9.810	-10.750	-7.244	-9.747	-9.994	-6.858	-10.50	-10.12	-7.30	-14.156	-5
	6905	191	-8.553	-10.756	-6.506	-9.079	-10.784	-6.838	-9.188	-10.017	-6.572	-10.50	-10.12	-7.30	-13.803	-5

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.605	-10.923	-7.204	-8.865	-9.607	-6.210	-8.881	-9.951	-6.373	-10.07	-9.91	-6.98	-13.189	-5
	6265	63	-9.870	-8.922	-6.360	-9.264	-8.755	-5.992	-8.840	-8.547	-5.680	-10.07	-9.91	-6.98	-12.660	-5
UNII6	6425	95	-8.765	-8.855	-5.799	-8.827	-8.674	-5.739	-8.349	-8.747	-5.533	-10.38	-10.60	-7.48	-13.012	-5
	6585	127	-8.851	-9.663	-6.228	-8.674	-9.631	-6.116	-8.788	-9.153	-5.956	-10.38	-10.60	-7.48	-13.435	-5
UNII8	6745	159	-9.074	-10.508	-6.722	-8.616	-9.666	-6.099	-8.691	-9.097	-5.879	-10.50	-10.12	-7.30	-13.176	-5
	6905	191	-9.206	-9.927	-6.541	-8.708	-9.636	-6.137	-8.384	-9.751	-6.003	-10.50	-10.12	-7.30	-13.301	-5

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.606	-10.198	-6.881	-8.993	-9.976	-6.446	-9.171	-9.934	-6.525	-10.07	-9.91	-6.98	-13.425	-5
	6265	63	-9.629	-9.543	-6.575	-9.193	-9.334	-6.252	-8.874	-9.122	-5.986	-10.07	-9.91	-6.98	-12.965	-5
UNII6	6425	95	-9.249	-9.347	-6.287	-9.113	-9.084	-6.088	-8.896	-8.802	-5.838	-10.38	-10.60	-7.48	-13.317	-5
	6585	127	-9.136	-9.301	-6.207	-8.816	-9.116	-5.953	-8.739	-8.927	-5.821	-10.38	-10.60	-7.48	-13.300	-5
UNII8	6745	159	-8.957	-9.959	-6.419	-8.726	-9.550	-6.108	-8.371	-9.432	-5.859	-10.50	-10.12	-7.30	-13.156	-5
	6905	191	-8.652	-10.181	-6.339	-8.454	-9.788	-6.059	-8.274	-9.647	-5.896	-10.50	-10.12	-7.30	-13.193	-5

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.043	-7.111	-4.067	-7.027	-7.039	-4.023	-7.127	-7.031	-4.069	-10.07	-9.91	-6.98	-11.002	-5
	6265	63	-6.856	-7.910	-4.341	-6.560	-7.842	-4.144	-6.501	-8.028	-4.188	-10.07	-9.91	-6.98	-11.123	-5
UNII6	6425	95	-5.610	-7.900	-3.596	-5.861	-8.139	-3.842	-6.069	-7.805	-3.841	-10.38	-10.60	-7.48	-11.075	-5
	6585	127	-6.941	-6.779	-3.849	-6.725	-7.036	-3.868	-6.967	-7.065	-4.006	-10.38	-10.60	-7.48	-11.328	-5
UNII8	6745	159	-6.844	-6.700	-3.762	-6.690	-6.883	-3.776	-6.702	-7.032	-3.854	-10.50	-10.12	-7.30	-11.059	-5
	6905	191	-6.609	-7.123	-3.849	-6.417	-7.015	-3.696	-6.515	-6.680	-3.587	-10.50	-10.12	-7.30	-10.884	-5

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-7.355	-7.923	-4.619	-	-	-	-7.304	-7.715	-4.494	-10.07	-9.91	-6.98	-11.474	-5
	6265	63	-6.409	-7.508	-3.914	-	-	-	-6.530	-7.445	-3.953	-10.07	-9.91	-6.98	-10.893	-5
UNII6	6425	95	-6.445	-8.192	-4.221	-	-	-	-6.441	-8.227	-4.233	-10.38	-10.60	-7.48	-11.700	-5
	6585	127	-6.723	-6.509	-3.604	-	-	-	-7.031	-6.473	-3.733	-10.38	-10.60	-7.48	-11.083	-5
UNII8	6745	159	-6.683	-6.179	-3.413	-	-	-	-6.577	-6.362	-3.458	-10.50	-10.12	-7.30	-10.711	-5
	6905	191	-6.200	-6.823	-3.490	-	-	-	-6.403	-6.778	-3.576	-10.50	-10.12	-7.30	-10.788	-5

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-7.396	-8.056	-4.703	-	-	-	-10.07	-9.91	-6.98	-11.683	-5
	6265	63	-	-	-	-6.104	-7.688	-3.814	-	-	-	-10.07	-9.91	-6.98	-10.793	-5
UNII6	6425	95	-	-	-	-6.259	-7.938	-4.008	-	-	-	-10.38	-10.60	-7.48	-11.487	-5
	6585	127	-	-	-	-6.731	-6.726	-3.718	-	-	-	-10.38	-10.60	-7.48	-11.197	-5
UNII8	6745	159	-	-	-	-6.426	-7.044	-3.714	-	-	-	-10.50	-10.12	-7.30	-11.011	-5
	6905	191	-	-	-	-6.423	-6.820	-3.607	-	-	-	-10.50	-10.12	-7.30	-10.904	-5

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-9.532	-10.428	-6.946	-8.301	-9.755	-5.957	-7.630	-8.576	-5.067	-10.07	-9.91	-6.98	-12.046	-5
	6265	63	-8.726	-9.359	-6.020	-8.613	-8.939	-5.762	-8.245	-7.886	-5.051	-10.07	-9.91	-6.98	-12.031	-5
UNII6	6425	95	-9.280	-9.785	-6.515	-8.480	-8.927	-5.687	-7.910	-8.193	-5.039	-10.38	-10.60	-7.48	-12.518	-5
	6585	127	-9.511	-10.550	-6.989	-8.353	-8.877	-5.597	-8.304	-8.295	-5.289	-10.38	-10.60	-7.48	-12.768	-5
UNII8	6745	159	-9.447	-9.850	-6.633	-8.491	-9.149	-5.797	-7.778	-9.227	-5.432	-10.50	-10.12	-7.30	-12.729	-5
	6905	191	-8.293	-10.327	-6.181	-8.183	-9.295	-5.693	-7.597	-8.323	-4.934	-10.50	-10.12	-7.30	-12.232	-5

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.613	-9.485	-6.017	-7.275	-8.784	-4.954	-7.053	-8.410	-4.668	-10.07	-9.91	-6.98	-11.648	-5
	6265	63	-8.379	-8.574	-5.465	-7.820	-7.980	-4.889	-7.155	-7.326	-4.229	-10.07	-9.91	-6.98	-11.208	-5
UNII6	6425	95	-7.882	-8.519	-5.178	-7.951	-7.361	-4.635	-6.918	-7.212	-4.052	-10.38	-10.60	-7.48	-11.531	-5
	6585	127	-8.532	-8.971	-5.735	-7.455	-8.219	-4.810	-6.757	-7.069	-3.900	-10.38	-10.60	-7.48	-11.379	-5
UNII8	6745	159	-8.143	-9.165	-5.613	-7.642	-8.029	-4.821	-6.641	-7.750	-4.150	-10.50	-10.12	-7.30	-11.447	-5
	6905	191	-8.396	-9.349	-5.836	-7.948	-8.628	-5.264	-7.318	-8.307	-4.774	-10.50	-10.12	-7.30	-12.071	-5

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.658	-9.317	-5.964	-8.103	-8.921	-5.482	-7.325	-8.253	-4.754	-10.07	-9.91	-6.98	-11.733	-5
	6265	63	-8.677	-9.187	-5.914	-7.962	-7.654	-4.795	-7.152	-6.983	-4.056	-10.07	-9.91	-6.98	-11.035	-5
UNII6	6425	95	-9.090	-8.800	-5.932	-8.111	-7.789	-4.936	-7.797	-7.340	-4.552	-10.38	-10.60	-7.48	-12.031	-5
	6585	127	-8.628	-8.954	-5.777	-7.528	-7.731	-4.618	-7.337	-7.240	-4.278	-10.38	-10.60	-7.48	-11.757	-5
UNII8	6745	159	-8.103	-9.157	-5.587	-7.564	-8.766	-5.113	-7.201	-8.081	-4.608	-10.50	-10.12	-7.30	-11.906	-5
	6905	191	-8.575	-9.106	-5.822	-7.792	-8.934	-5.315	-7.363	-7.986	-4.653	-10.50	-10.12	-7.30	-11.950	-5

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.649	-6.842	-3.735	-6.755	-6.882	-3.808	-6.693	-6.842	-3.757	-10.07	-9.91	-6.98	-10.714	-5
	6265	63	-6.630	-7.803	-4.167	-6.460	-7.643	-4.001	-6.262	-7.628	-3.882	-10.07	-9.91	-6.98	-10.861	-5
UNII6	6425	95	-6.071	-7.707	-3.803	-6.000	-7.426	-3.645	-6.545	-7.953	-4.182	-10.38	-10.60	-7.48	-11.124	-5
	6585	127	-7.326	-7.041	-4.171	-7.245	-6.736	-3.973	-7.033	-6.708	-3.858	-10.38	-10.60	-7.48	-11.337	-5
UNII8	6745	159	-6.344	-7.200	-3.741	-6.535	-7.124	-3.810	-6.612	-7.502	-4.024	-10.50	-10.12	-7.30	-11.039	-5
	6905	191	-6.768	-7.228	-3.982	-6.939	-7.173	-4.045	-7.046	-7.332	-4.177	-10.50	-10.12	-7.30	-11.280	-5

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.936	-7.761	-4.319	-	-	-	-6.753	-7.502	-4.101	-10.07	-9.91	-6.98	-11.080	-5
	6265	63	-6.645	-7.294	-3.947	-	-	-	-6.591	-7.321	-3.930	-10.07	-9.91	-6.98	-10.910	-5
UNII6	6425	95	-6.498	-7.680	-4.039	-	-	-	-6.759	-8.168	-4.396	-10.38	-10.60	-7.48	-11.518	-5
	6585	127	-6.907	-6.502	-3.690	-	-	-	-6.841	-6.503	-3.658	-10.38	-10.60	-7.48	-11.137	-5
UNII8	6745	159	-6.352	-6.459	-3.395	-	-	-	-6.390	-6.648	-3.507	-10.50	-10.12	-7.30	-10.693	-5
	6905	191	-6.450	-6.911	-3.664	-	-	-	-6.196	-7.018	-3.577	-10.50	-10.12	-7.30	-10.875	-5

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-6.567	-7.482	-3.990	-	-	-	-10.07	-9.91	-6.98	-10.970	-5
	6265	63	-	-	-	-5.726	-6.759	-3.202	-	-	-	-10.07	-9.91	-6.98	-10.181	-5
UNII6	6425	95	-	-	-	-6.254	-7.329	-3.748	-	-	-	-10.38	-10.60	-7.48	-11.227	-5
	6585	127	-	-	-	-6.475	-5.966	-3.203	-	-	-	-10.38	-10.60	-7.48	-10.682	-5
UNII8	6745	159	-	-	-	-6.081	-6.865	-3.445	-	-	-	-10.50	-10.12	-7.30	-10.743	-5
	6905	191	-	-	-	-6.237	-6.336	-3.276	-	-	-	-10.50	-10.12	-7.30	-10.574	-5

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.935	-8.665	-4.704	-8.424	-9.472	-5.906	-8.909	-10.298	-6.538	-10.07	-9.91	-6.98	-11.683	-5
	6265	63	-7.722	-7.968	-4.833	-8.276	-9.128	-5.671	-9.163	-10.187	-6.634	-10.07	-9.91	-6.98	-11.812	-5
UNII6	6425	95	-7.849	-7.679	-4.753	-8.863	-9.544	-6.180	-9.931	-9.699	-6.803	-10.38	-10.60	-7.48	-12.232	-5
	6585	127	-8.231	-7.965	-5.085	-8.459	-9.432	-5.908	-9.598	-10.121	-6.841	-10.38	-10.60	-7.48	-12.564	-5
UNII8	6745	159	-7.955	-8.252	-5.090	-8.864	-9.367	-6.098	-9.465	-9.863	-6.649	-10.50	-10.12	-7.30	-12.388	-5
	6905	191	-6.901	-8.819	-4.744	-8.950	-9.642	-6.272	-10.443	-10.745	-7.581	-10.50	-10.12	-7.30	-12.042	-5

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.129	-8.111	-4.582	-7.876	-9.287	-5.514	-8.656	-10.249	-6.369	-10.07	-9.91	-6.98	-11.561	-5
	6265	63	-7.240	-7.248	-4.233	-8.113	-8.680	-5.377	-9.028	-9.469	-6.232	-10.07	-9.91	-6.98	-11.213	-5
UNII6	6425	95	-6.898	-6.864	-3.870	-8.219	-8.201	-5.199	-8.669	-8.555	-5.601	-10.38	-10.60	-7.48	-11.349	-5
	6585	127	-7.147	-7.215	-4.170	-7.506	-8.072	-4.769	-8.613	-8.937	-5.761	-10.38	-10.60	-7.48	-11.649	-5
UNII8	6745	159	-6.813	-7.413	-4.092	-7.334	-8.092	-4.686	-8.297	-9.011	-5.629	-10.50	-10.12	-7.30	-11.390	-5
	6905	191	-7.050	-7.951	-4.467	-8.202	-9.187	-5.656	-9.157	-10.081	-6.584	-10.50	-10.12	-7.30	-11.764	-5

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.138	-8.095	-4.580	-7.657	-8.911	-5.228	-8.312	-9.703	-5.941	-10.07	-9.91	-6.98	-11.559	-5
	6265	63	-7.185	-6.737	-3.945	-8.040	-8.348	-5.181	-8.532	-8.558	-5.534	-10.07	-9.91	-6.98	-10.924	-5
UNII6	6425	95	-7.904	-7.149	-4.499	-8.317	-8.301	-5.298	-9.282	-8.778	-6.012	-10.38	-10.60	-7.48	-11.978	-5
	6585	127	-7.601	-7.263	-4.418	-8.487	-8.758	-5.610	-9.113	-9.491	-6.287	-10.38	-10.60	-7.48	-11.897	-5
UNII8	6745	159	-7.172	-8.309	-4.693	-8.342	-9.219	-5.748	-9.029	-9.864	-6.416	-10.50	-10.12	-7.30	-11.990	-5
	6905	191	-7.895	-7.907	-4.890	-8.886	-9.004	-5.934	-9.660	-9.566	-6.602	-10.50	-10.12	-7.30	-12.188	-5

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.766	-6.848	-3.797	-6.663	-6.762	-3.702	-6.036	-6.254	-3.134	-10.07	-9.91	-6.98	-10.113	-5
	6265	63	-6.357	-7.516	-3.888	-6.612	-7.462	-4.006	-6.812	-7.482	-4.124	-10.07	-9.91	-6.98	-10.867	-5
UNII6	6425	95	-6.384	-7.960	-4.091	-6.466	-7.791	-4.068	-6.476	-8.027	-4.173	-10.38	-10.60	-7.48	-11.547	-5
	6585	127	-7.097	-6.871	-3.973	-7.024	-7.068	-4.036	-6.959	-7.257	-4.096	-10.38	-10.60	-7.48	-11.452	-5
UNII8	6745	159	-6.896	-7.616	-4.231	-6.744	-7.416	-4.057	-6.853	-7.384	-4.100	-10.50	-10.12	-7.30	-11.355	-5
	6905	191	-7.008	-7.334	-4.158	-6.856	-7.399	-4.109	-7.013	-7.297	-4.143	-10.50	-10.12	-7.30	-11.407	-5

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.110	-7.313	-4.200	-	-	-	-6.872	-7.156	-4.001	-10.07	-9.91	-6.98	-10.981	-5
	6265	63	-6.430	-6.667	-3.537	-	-	-	-6.642	-6.710	-3.666	-10.07	-9.91	-6.98	-10.516	-5
UNII6	6425	95	-6.957	-8.141	-4.499	-	-	-	-6.901	-8.147	-4.469	-10.38	-10.60	-7.48	-11.948	-5
	6585	127	-6.924	-6.388	-3.638	-	-	-	-6.842	-6.518	-3.667	-10.38	-10.60	-7.48	-11.117	-5
UNII8	6745	159	-6.518	-6.696	-3.596	-	-	-	-6.622	-6.581	-3.591	-10.50	-10.12	-7.30	-10.889	-5
	6905	191	-6.179	-6.581	-3.365	-	-	-	-6.510	-6.620	-3.554	-10.50	-10.12	-7.30	-10.663	-5

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-6.607	-7.364	-3.959	-	-	-	-10.07	-9.91	-6.98	-10.938	-5
	6265	63	-	-	-	-5.891	-6.617	-3.229	-	-	-	-10.07	-9.91	-6.98	-10.208	-5
UNII6	6425	95	-	-	-	-6.247	-7.419	-3.783	-	-	-	-10.38	-10.60	-7.48	-11.262	-5
	6585	127	-	-	-	-6.605	-6.164	-3.369	-	-	-	-10.38	-10.60	-7.48	-10.848	-5
UNII8	6745	159	-	-	-	-6.036	-6.848	-3.413	-	-	-	-10.50	-10.12	-7.30	-10.710	-5
	6905	191	-	-	-	-6.406	-6.584	-3.484	-	-	-	-10.50	-10.12	-7.30	-10.781	-5

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.258	-10.466	-6.810	-9.489	-11.283	-7.284	-9.321	-10.721	-6.954	-10.07	-9.91	-6.98	-13.789	-5
	6265	63	-9.343	-9.803	-6.556	-9.853	-10.681	-7.237	-10.264	-10.314	-7.278	-10.07	-9.91	-6.98	-13.536	-5
UNII6	6425	95	-9.786	-9.124	-6.432	-10.058	-9.568	-6.796	-10.229	-10.389	-7.298	-10.38	-10.60	-7.48	-13.911	-5
	6585	127	-9.744	-9.922	-6.822	-10.070	-10.768	-7.394	-9.782	-11.059	-7.363	-10.38	-10.60	-7.48	-14.301	-5
UNII8	6745	159	-9.621	-10.375	-6.971	-9.599	-10.720	-7.113	-10.534	-11.607	-8.027	-10.50	-10.12	-7.30	-14.269	-5
	6905	191	-10.129	-10.647	-7.370	-10.641	-10.781	-7.700	-11.270	-11.425	-8.336	-10.50	-10.12	-7.30	-14.667	-5

Mode : EHT320(80HH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.754	-9.347	-6.030	-9.209	-10.100	-6.621	-9.299	-10.576	-6.880	-10.07	-9.91	-6.98	-13.009	-5
	6265	63	-9.384	-9.210	-6.286	-9.306	-9.753	-6.513	-9.501	-10.443	-6.936	-10.07	-9.91	-6.98	-13.265	-5
UNII6	6425	95	-8.971	-8.108	-5.508	-8.871	-8.505	-5.674	-8.625	-8.690	-5.647	-10.38	-10.60	-7.48	-12.987	-5
	6585	127	-8.643	-9.293	-5.945	-9.418	-9.383	-6.390	-9.624	-10.128	-6.858	-10.38	-10.60	-7.48	-13.424	-5
UNII8	6745	159	-8.727	-9.179	-5.937	-8.899	-9.847	-6.337	-9.107	-10.168	-6.595	-10.50	-10.12	-7.30	-13.234	-5
	6905	191	-9.593	-10.122	-6.839	-9.948	-10.613	-7.257	-9.817	-10.983	-7.350	-10.50	-10.12	-7.30	-14.137	-5

Mode : EHT320(80HH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.501	-9.803	-6.093	-9.026	-9.858	-6.411	-8.520	-10.066	-6.214	-10.07	-9.91	-6.98	-13.072	-5
	6265	63	-8.527	-9.122	-5.804	-8.551	-9.296	-5.897	-9.018	-9.408	-6.198	-10.07	-9.91	-6.98	-12.783	-5
UNII6	6425	95	-9.559	-9.172	-6.351	-9.572	-9.646	-6.598	-9.834	-9.533	-6.670	-10.38	-10.60	-7.48	-13.830	-5
	6585	127	-9.122	-9.307	-6.203	-9.736	-9.585	-6.649	-10.113	-10.206	-7.149	-10.38	-10.60	-7.48	-13.682	-5
UNII8	6745	159	-8.949	-9.852	-6.366	-9.493	-10.434	-6.927	-10.331	-10.543	-7.425	-10.50	-10.12	-7.30	-13.664	-5
	6905	191	-9.785	-9.369	-6.561	-10.372	-9.369	-6.831	-10.825	-10.022	-7.394	-10.50	-10.12	-7.30	-13.859	-5

Mode : EHT320(80HH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.551	-6.615	-3.573	-6.546	-6.527	-3.527	-6.424	-6.328	-3.366	-10.07	-9.91	-6.98	-10.345	-5
	6265	63	-6.504	-7.461	-3.946	-6.895	-7.526	-4.189	-6.987	-7.540	-4.245	-10.07	-9.91	-6.98	-10.926	-5
UNII6	6425	95	-6.745	-7.727	-4.198	-6.394	-7.864	-4.057	-6.554	-7.952	-4.187	-10.38	-10.60	-7.48	-11.536	-5
	6585	127	-7.013	-6.945	-3.969	-7.138	-7.371	-4.243	-7.057	-7.672	-4.344	-10.38	-10.60	-7.48	-11.448	-5
UNII8	6745	159	-6.684	-7.535	-4.079	-7.021	-7.894	-4.426	-7.283	-7.784	-4.516	-10.50	-10.12	-7.30	-11.376	-5
	6905	191	-7.287	-7.300	-4.284	-7.165	-7.090	-4.117	-7.203	-7.139	-4.161	-10.50	-10.12	-7.30	-11.415	-5

Mode : EHT320(80HH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.121	-7.537	-4.314	-	-	-	-7.154	-7.334	-4.233	-10.07	-9.91	-6.98	-11.212	-5
	6265	63	-6.872	-6.835	-3.843	-	-	-	-7.273	-7.279	-4.266	-10.07	-9.91	-6.98	-10.823	-5
UNII6	6425	95	-6.822	-8.375	-4.519	-	-	-	-6.809	-8.154	-4.419	-10.38	-10.60	-7.48	-11.898	-5
	6585	127	-6.730	-6.744	-3.727	-	-	-	-7.106	-7.144	-4.115	-10.38	-10.60	-7.48	-11.206	-5
UNII8	6745	159	-6.306	-6.957	-3.609	-	-	-	-6.663	-6.949	-3.793	-10.50	-10.12	-7.30	-10.907	-5
	6905	191	-6.938	-6.736	-3.826	-	-	-	-6.778	-6.843	-3.800	-10.50	-10.12	-7.30	-11.098	-5

Mode : EHT320(80HH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-6.631	-7.438	-4.006	-	-	-	-10.07	-9.91	-6.98	-10.985	-5
	6265	63	-	-	-	-6.617	-7.184	-3.881	-	-	-	-10.07	-9.91	-6.98	-10.860	-5
UNII6	6425	95	-	-	-	-6.716	-7.847	-4.235	-	-	-	-10.38	-10.60	-7.48	-11.714	-5
	6585	127	-	-	-	-6.497	-6.816	-3.643	-	-	-	-10.38	-10.60	-7.48	-11.122	-5
UNII8	6745	159	-	-	-	-6.564	-7.372	-3.939	-	-	-	-10.50	-10.12	-7.30	-11.237	-5
	6905	191	-	-	-	-6.671	-6.926	-3.786	-	-	-	-10.50	-10.12	-7.30	-11.084	-5

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-9.386	-10.931	-7.080	-	-	-	-10.07	-9.91	-6.98	-14.059	-5
	6265	63	-	-	-	-9.278	-10.127	-6.671	-	-	-	-10.07	-9.91	-6.98	-13.651	-5
UNII6	6425	95	-	-	-	-9.556	-10.987	-7.202	-	-	-	-10.38	-10.60	-7.48	-14.681	-5
	6585	127	-	-	-	-10.214	-9.479	-6.820	-	-	-	-10.38	-10.60	-7.48	-14.299	-5
UNII8	6745	159	-	-	-	-9.481	-9.901	-6.675	-	-	-	-10.50	-10.12	-7.30	-13.973	-5
	6905	191	-	-	-	-9.862	-9.897	-6.869	-	-	-	-10.50	-10.12	-7.30	-14.167	-5

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-9.846	-10.541	-7.169	-	-	-	-10.07	-9.91	-6.98	-14.148	-5
	6265	63	-	-	-	-9.544	-10.029	-6.769	-	-	-	-10.07	-9.91	-6.98	-13.748	-5
UNII6	6425	95	-	-	-	-9.679	-11.105	-7.323	-	-	-	-10.38	-10.60	-7.48	-14.802	-5
	6585	127	-	-	-	-10.026	-9.713	-6.856	-	-	-	-10.38	-10.60	-7.48	-14.335	-5
UNII8	6745	159	-	-	-	-9.630	-10.282	-6.933	-	-	-	-10.50	-10.12	-7.30	-14.231	-5
	6905	191	-	-	-	-9.192	-9.930	-6.535	-	-	-	-10.50	-10.12	-7.30	-13.832	-5

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-13.253	-13.910	-10.559	-	-	-	-10.07	-9.91	-6.98	-17.538	-5
	6265	63	-	-	-	-12.495	-13.461	-9.941	-	-	-	-10.07	-9.91	-6.98	-16.920	-5
UNII6	6425	95	-	-	-	-12.774	-14.326	-10.471	-	-	-	-10.38	-10.60	-7.48	-17.950	-5
	6585	127	-	-	-	-13.074	-12.852	-9.951	-	-	-	-10.38	-10.60	-7.48	-17.430	-5
UNII8	6745	159	-	-	-	-12.276	-13.569	-9.864	-	-	-	-10.50	-10.12	-7.30	-17.162	-5
	6905	191	-	-	-	-12.471	-12.919	-9.679	-	-	-	-10.50	-10.12	-7.30	-16.976	-5

Mode: EHT320 SU																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-12.492	-13.232	-9.836	-	-	-	-10.07	-9.91	-6.98	-16.815	-5
	6265	63	-	-	-	-11.922	-12.761	-9.311	-	-	-	-10.07	-9.91	-6.98	-16.290	-5
UNII6	6425	95	-	-	-	-12.384	-13.104	-9.719	-	-	-	-10.38	-10.60	-7.48	-17.198	-5
	6585	127	-	-	-	-12.591	-11.904	-9.223	-	-	-	-10.38	-10.60	-7.48	-16.702	-5
UNII8	6745	159	-	-	-	-12.143	-12.640	-9.374	-	-	-	-10.50	-10.12	-7.30	-16.672	-5
	6905	191	-	-	-	-11.897	-12.373	-9.118	-	-	-	-10.50	-10.12	-7.30	-16.416	-5

Mode: 802.11a																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-7.023	-6.776	-3.887	-	-	-	-10.07	-9.91	-6.98	-10.866	-5
	6175	45	-	-	-	-6.329	-6.527	-3.416	-	-	-	-10.07	-9.91	-6.98	-10.395	-5
	6415	93	-	-	-	-5.747	-6.473	-3.084	-	-	-	-10.07	-9.91	-6.98	-10.063	-5
UNII6	6435	97	-	-	-	-6.085	-7.425	-3.693	-	-	-	-10.38	-10.60	-7.48	-11.172	-5
	6475	105	-	-	-	-6.189	-7.177	-3.644	-	-	-	-10.38	-10.60	-7.48	-11.123	-5
	6515	113	-	-	-	-6.323	-6.660	-3.477	-	-	-	-10.38	-10.60	-7.48	-10.956	-5
UNII7	6535	117	-	-	-	-6.351	-6.991	-3.648	-	-	-	-10.38	-10.60	-7.48	-11.127	-5
	6695	149	-	-	-	-6.056	-6.358	-3.194	-	-	-	-10.38	-10.60	-7.48	-10.673	-5
	6855	181	-	-	-	-6.076	-6.651	-3.343	-	-	-	-10.38	-10.60	-7.48	-10.822	-5
UNII8	6875	185	-	-	-	-6.314	-6.656	-3.471	-	-	-	-10.50	-10.12	-7.30	-10.768	-5
	6995	209	-	-	-	-6.076	-6.156	-3.105	-	-	-	-10.50	-10.12	-7.30	-10.403	-5
	7115	233	-	-	-	-6.163	-6.684	-3.405	-	-	-	-10.50	-10.12	-7.30	-10.703	-5

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-8.618	-10.424	-6.418	-8.518	-10.493	-6.384	-8.862	-10.374	-6.542	-10.07	-9.91	-6.98	-13.363	-5
	6175	45	-8.901	-9.406	-6.136	-9.008	-9.776	-6.365	-9.065	-9.576	-6.303	-10.07	-9.91	-6.98	-13.115	-5
	6415	93	-9.288	-9.114	-6.190	-9.186	-9.528	-6.343	-9.175	-9.521	-6.334	-10.07	-9.91	-6.98	-13.169	-5
UNII6	6435	97	-8.705	-9.231	-5.950	-9.152	-9.452	-6.289	-8.964	-9.570	-6.246	-10.38	-10.60	-7.48	-13.429	-5
	6475	105	-9.286	-9.915	-6.579	-9.494	-9.984	-6.722	-9.267	-9.537	-6.390	-10.38	-10.60	-7.48	-13.869	-5
	6515	113	-9.110	-9.888	-6.471	-9.337	-9.931	-6.614	-9.042	-9.696	-6.346	-10.38	-10.60	-7.48	-13.825	-5
UNII7	6535	117	-9.194	-9.461	-6.315	-9.545	-10.287	-6.890	-8.969	-9.951	-6.422	-10.38	-10.60	-7.48	-13.794	-5
	6695	149	-9.074	-9.741	-6.384	-9.275	-9.799	-6.519	-9.412	-9.696	-6.541	-10.38	-10.60	-7.48	-13.863	-5
	6855	181	-8.843	-9.923	-6.339	-9.018	-10.274	-6.590	-8.899	-9.826	-6.328	-10.38	-10.60	-7.48	-13.807	-5
UNII8	6875	185	-8.884	-10.043	-6.415	-8.722	-10.209	-6.392	-8.851	-10.041	-6.395	-10.50	-10.12	-7.30	-13.690	-5
	6995	209	-9.120	-10.619	-6.795	-9.128	-10.430	-6.720	-9.082	-10.506	-6.726	-10.50	-10.12	-7.30	-14.018	-5
	7115	233	-8.164	-11.582	-6.535	-8.345	-11.450	-6.615	-8.276	-11.638	-6.629	-10.50	-10.12	-7.30	-13.832	-5

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-7.744	-9.754	-5.623	-	-	-	-7.840	-9.932	-5.751	-10.07	-9.91	-6.98	-12.602	-5
	6175	45	-8.535	-9.562	-6.008	-	-	-	-8.709	-9.490	-6.071	-10.07	-9.91	-6.98	-12.987	-5
	6415	93	-9.428	-9.542	-6.474	-	-	-	-9.601	-9.708	-6.644	-10.07	-9.91	-6.98	-13.453	-5
UNII6	6435	97	-9.340	-9.294	-6.306	-	-	-	-9.330	-9.448	-6.378	-10.38	-10.60	-7.48	-13.785	-5
	6475	105	-9.288	-9.435	-6.350	-	-	-	-9.196	-9.452	-6.311	-10.38	-10.60	-7.48	-13.790	-5
	6515	113	-9.260	-9.513	-6.374	-	-	-	-9.661	-9.528	-6.583	-10.38	-10.60	-7.48	-13.853	-5
UNII7	6535	117	-9.387	-9.429	-6.397	-	-	-	-9.249	-9.573	-6.397	-10.38	-10.60	-7.48	-13.876	-5
	6695	149	-8.708	-9.423	-6.040	-	-	-	-8.899	-9.467	-6.163	-10.38	-10.60	-7.48	-13.519	-5
	6855	181	-8.643	-10.036	-6.273	-	-	-	-8.677	-10.091	-6.316	-10.38	-10.60	-7.48	-13.752	-5
UNII8	6875	185	-8.685	-10.114	-6.330	-	-	-	-8.973	-10.100	-6.489	-10.50	-10.12	-7.30	-13.628	-5
	6995	209	-8.461	-9.795	-6.066	-	-	-	-8.384	-9.206	-5.765	-10.50	-10.12	-7.30	-13.063	-5
	7115	233	-7.781	-10.126	-5.786	-	-	-	-7.821	-9.866	-5.714	-10.50	-10.12	-7.30	-13.011	-5

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-8.419	-10.243	-6.226	-8.697	-10.201	-6.374	-8.504	-10.066	-6.205	-10.07	-9.91	-6.98	-13.184	-5
	6165	43	-8.483	-9.043	-5.744	-8.456	-8.916	-5.670	-8.384	-9.181	-5.754	-10.07	-9.91	-6.98	-12.649	-5
	6405	91	-9.161	-9.339	-6.239	-9.352	-9.571	-6.450	-9.109	-9.112	-6.100	-10.07	-9.91	-6.98	-13.080	-5
UNII6	6445	99	-9.079	-9.272	-6.164	-9.182	-9.682	-6.415	-9.138	-9.310	-6.213	-10.38	-10.60	-7.48	-13.643	-5
	6485	107	-8.885	-9.667	-6.248	-9.333	-9.788	-6.544	-8.998	-9.598	-6.278	-10.38	-10.60	-7.48	-13.727	-5
	6525	115	-9.002	-9.374	-6.174	-8.813	-9.808	-6.272	-9.114	-9.694	-6.384	-10.38	-10.60	-7.48	-13.653	-5
UNII7	6565	123	-9.173	-9.939	-6.529	-9.133	-9.709	-6.401	-8.995	-9.676	-6.312	-10.38	-10.60	-7.48	-13.791	-5
	6685	147	-9.046	-9.518	-6.265	-8.797	-9.357	-6.058	-9.165	-9.173	-6.159	-10.38	-10.60	-7.48	-13.537	-5
	6845	179	-8.880	-9.722	-6.271	-9.167	-9.759	-6.443	-8.813	-9.699	-6.223	-10.38	-10.60	-7.48	-13.702	-5
UNII8	6885	187	-9.020	-9.778	-6.372	-9.143	-10.006	-6.543	-8.850	-10.023	-6.387	-10.50	-10.12	-7.30	-13.670	-5
	7005	211	-8.294	-9.937	-6.028	-8.653	-9.907	-6.225	-8.503	-9.941	-6.153	-10.50	-10.12	-7.30	-13.326	-5
	7085	227	-8.396	-11.582	-6.693	-8.715	-11.955	-7.029	-8.504	-11.577	-6.764	-10.50	-10.12	-7.30	-13.991	-5

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-7.769	-9.648	-5.598	-7.913	-10.204	-5.899	-8.101	-10.051	-5.957	-10.07	-9.91	-6.98	-12.577	-5
	6165	43	-8.562	-9.416	-5.958	-8.550	-9.693	-6.074	-8.421	-9.454	-5.897	-10.07	-9.91	-6.98	-12.876	-5
	6405	91	-9.353	-9.514	-6.423	-9.717	-9.690	-6.693	-9.342	-9.343	-6.332	-10.07	-9.91	-6.98	-13.312	-5
UNII6	6445	99	-9.123	-9.414	-6.256	-9.468	-9.462	-6.455	-9.236	-9.206	-6.211	-10.38	-10.60	-7.48	-13.690	-5
	6485	107	-9.342	-9.131	-6.225	-9.138	-9.607	-6.356	-9.070	-9.288	-6.168	-10.38	-10.60	-7.48	-13.647	-5
	6525	115	-9.219	-9.336	-6.267	-9.330	-9.649	-6.476	-9.377	-9.525	-6.440	-10.38	-10.60	-7.48	-13.746	-5
UNII7	6565	123	-9.021	-9.339	-6.167	-9.274	-9.498	-6.374	-9.260	-9.369	-6.304	-10.38	-10.60	-7.48	-13.646	-5
	6685	147	-8.978	-9.275	-6.114	-9.023	-9.374	-6.185	-9.271	-9.533	-6.390	-10.38	-10.60	-7.48	-13.593	-5
	6845	179	-8.406	-9.813	-6.043	-8.852	-9.878	-6.325	-8.639	-10.002	-6.257	-10.38	-10.60	-7.48	-13.522	-5
UNII8	6885	187	-8.830	-9.919	-6.330	-8.929	-10.174	-6.497	-8.917	-9.769	-6.312	-10.50	-10.12	-7.30	-13.610	-5
	7005	211	-8.596	-9.598	-6.058	-8.624	-9.457	-6.010	-8.633	-9.269	-5.929	-10.50	-10.12	-7.30	-13.227	-5
	7085	227	-7.525	-9.915	-5.548	-7.555	-9.950	-5.579	-7.383	-9.798	-5.415	-10.50	-10.12	-7.30	-12.712	-5

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-8.400	-9.529	-5.917	-8.361	-9.663	-5.953	-8.512	-9.520	-5.976	-10.07	-9.91	-6.98	-12.897	-5
	6145	39	-8.375	-9.719	-5.985	-8.640	-9.558	-6.064	-8.367	-9.812	-6.019	-10.07	-9.91	-6.98	-12.964	-5
	6385	87	-9.898	-9.975	-6.926	-9.916	-9.838	-6.866	-9.510	-9.733	-6.610	-10.07	-9.91	-6.98	-13.589	-5
UNII6	6465	103	-9.321	-10.159	-6.709	-9.627	-9.648	-6.627	-9.210	-9.441	-6.313	-10.38	-10.60	-7.48	-13.792	-5
	6545	119	-9.672	-10.233	-6.933	-9.447	-10.447	-6.908	-9.374	-9.840	-6.590	-10.38	-10.60	-7.48	-14.069	-5
UNII7	6625	135	-9.823	-9.640	-6.720	-9.640	-9.735	-6.677	-9.337	-9.659	-6.484	-10.38	-10.60	-7.48	-13.963	-5
	6705	151	-9.368	-9.624	-6.484	-9.073	-9.683	-6.357	-9.542	-9.686	-6.603	-10.38	-10.60	-7.48	-13.836	-5
	6785	167	-9.614	-10.449	-7.001	-9.439	-10.418	-6.890	-9.413	-9.940	-6.658	-10.38	-10.60	-7.48	-14.137	-5
UNII8	6865	183	-9.415	-10.075	-6.722	-9.410	-9.988	-6.679	-9.274	-10.165	-6.686	-10.50	-10.12	-7.30	-13.976	-5
	6945	199	-8.881	-9.614	-6.221	-9.088	-9.945	-6.485	-9.344	-9.906	-6.605	-10.50	-10.12	-7.30	-13.519	-5
	7025	215	-8.158	-10.725	-6.244	-8.328	-10.855	-6.400	-9.012	-10.895	-6.842	-10.50	-10.12	-7.30	-13.542	-5

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-8.036	-10.076	-5.927	-8.015	-10.460	-6.058	-8.059	-10.234	-6.002	-10.07	-9.91	-6.98	-12.907	-5
	6145	39	-8.796	-10.243	-6.449	-8.658	-10.242	-6.368	-8.451	-10.072	-6.176	-10.07	-9.91	-6.98	-13.156	-5
	6385	87	-9.846	-10.122	-6.972	-10.049	-9.907	-6.967	-9.757	-9.958	-6.846	-10.07	-9.91	-6.98	-13.826	-5
UNII6	6465	103	-9.910	-9.865	-6.877	-9.797	-10.027	-6.900	-9.873	-9.525	-6.685	-10.38	-10.60	-7.48	-14.164	-5
	6545	119	-9.409	-9.658	-6.522	-9.580	-9.639	-6.599	-9.832	-9.731	-6.771	-10.38	-10.60	-7.48	-14.001	-5
UNII7	6625	135	-9.182	-9.642	-6.396	-9.653	-9.699	-6.666	-9.427	-9.837	-6.617	-10.38	-10.60	-7.48	-13.875	-5
	6705	151	-9.570	-10.014	-6.776	-9.785	-10.313	-7.031	-9.752	-10.345	-7.028	-10.38	-10.60	-7.48	-14.255	-5
	6785	167	-9.573	-10.380	-6.948	-9.504	-10.708	-7.054	-9.551	-10.140	-6.825	-10.38	-10.60	-7.48	-14.304	-5
UNII8	6865	183	-9.129	-10.443	-6.726	-9.437	-10.513	-6.932	-9.360	-10.227	-6.762	-10.50	-10.12	-7.30	-14.024	-5
	6945	199	-8.805	-9.939	-6.325	-9.111	-9.831	-6.446	-9.205	-9.780	-6.473	-10.50	-10.12	-7.30	-13.623	-5
	7025	215	-8.204	-10.335	-6.130	-8.399	-10.159	-6.180	-8.655	-9.955	-6.246	-10.50	-10.12	-7.30	-13.428	-5

Mode: EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-8.430	-9.572	-5.954	-8.490	-9.472	-5.943	-8.621	-9.534	-6.044	-10.07	-9.91	-6.98	-12.923	-5
	6145	39	-8.342	-8.782	-5.547	-8.167	-8.687	-5.409	-8.350	-9.093	-5.696	-10.07	-9.91	-6.98	-12.389	-5
	6385	87	-8.391	-8.417	-5.394	-8.513	-8.426	-5.459	-8.677	-8.535	-5.596	-10.07	-9.91	-6.98	-12.373	-5
UNII6	6465	103	-8.706	-9.120	-5.898	-8.489	-9.249	-5.843	-8.521	-9.334	-5.899	-10.38	-10.60	-7.48	-13.322	-5
	6545	119	-8.147	-8.516	-5.318	-8.171	-8.883	-5.503	-7.905	-8.786	-5.313	-10.38	-10.60	-7.48	-12.792	-5
UNII7	6625	135	-8.735	-8.355	-5.531	-8.315	-8.197	-5.246	-8.593	-8.325	-5.447	-10.38	-10.60	-7.48	-12.725	-5
	6705	151	-8.506	-8.440	-5.463	-8.040	-8.426	-5.219	-8.364	-8.231	-5.287	-10.38	-10.60	-7.48	-12.698	-5
	6785	167	-7.964	-9.089	-5.480	-8.236	-8.905	-5.548	-8.152	-9.214	-5.641	-10.38	-10.60	-7.48	-12.959	-5
UNII8	6865	183	-8.190	-8.621	-5.390	-8.101	-8.336	-5.207	-7.924	-8.607	-5.242	-10.50	-10.12	-7.30	-12.505	-5
	6945	199	-7.696	-8.302	-4.979	-7.460	-8.326	-4.862	-7.383	-8.327	-4.820	-10.50	-10.12	-7.30	-12.117	-5
	7025	215	-7.810	-8.439	-5.103	-7.978	-8.358	-5.154	-7.441	-8.554	-4.952	-10.50	-10.12	-7.30	-12.250	-5

Mode: EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.491	-10.774	-7.075	-9.355	-11.037	-7.105	-9.051	-10.521	-6.714	-10.07	-9.91	-6.98	-13.693	-5
	6185	47	-9.269	-9.639	-6.440	-9.021	-9.761	-6.365	-9.324	-9.619	-6.459	-10.07	-9.91	-6.98	-13.345	-5
	6345	79	-9.933	-9.637	-6.772	-9.452	-10.238	-6.817	-9.477	-10.499	-6.948	-10.07	-9.91	-6.98	-13.752	-5
UNII6	6505	111	-9.915	-10.970	-7.400	-9.799	-10.609	-7.175	-9.413	-10.367	-6.854	-10.38	-10.60	-7.48	-14.333	-5
UNII7	6665	143	-10.201	-10.468	-7.322	-9.727	-9.971	-6.837	-9.265	-9.762	-6.496	-10.38	-10.60	-7.48	-13.975	-5
UNII8	6825	175	-9.697	-10.565	-7.099	-9.612	-10.659	-7.094	-9.654	-10.479	-7.037	-10.50	-10.12	-7.30	-14.334	-5
	6985	207	-9.204	-10.774	-6.908	-9.169	-10.393	-6.728	-9.494	-10.931	-7.143	-10.50	-10.12	-7.30	-14.026	-5

Mode: EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.972	-9.801	-6.356	-8.960	-9.937	-6.410	-8.917	-9.863	-6.354	-10.07	-9.91	-6.98	-13.333	-5
	6185	47	-9.054	-10.096	-6.533	-8.938	-9.920	-6.391	-8.637	-9.605	-6.083	-10.07	-9.91	-6.98	-13.063	-5
	6345	79	-9.135	-9.633	-6.366	-8.990	-9.574	-6.262	-9.127	-9.373	-6.238	-10.07	-9.91	-6.98	-13.217	-5
UNII6	6505	111	-9.683	-9.824	-6.742	-9.314	-9.691	-6.488	-9.562	-9.772	-6.655	-10.38	-10.60	-7.48	-13.967	-5
UNII7	6665	143	-9.099	-9.734	-6.394	-9.082	-9.462	-6.257	-9.150	-9.670	-6.392	-10.38	-10.60	-7.48	-13.736	-5
UNII8	6825	175	-8.871	-10.453	-6.580	-9.072	-10.083	-6.537	-8.912	-9.992	-6.408	-10.50	-10.12	-7.30	-13.705	-5
	6985	207	-8.593	-10.056	-6.253	-8.817	-10.161	-6.427	-9.131	-9.933	-6.503	-10.50	-10.12	-7.30	-13.550	-5

Mode: EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.690	-9.877	-6.233	-8.732	-9.895	-6.265	-8.710	-9.831	-6.224	-10.07	-9.91	-6.98	-13.204	-5
	6185	47	-8.153	-8.617	-5.369	-8.339	-8.697	-5.504	-8.222	-8.922	-5.548	-10.07	-9.91	-6.98	-12.348	-5
	6345	79	-8.329	-8.325	-5.317	-8.375	-8.332	-5.343	-8.077	-8.303	-5.178	-10.07	-9.91	-6.98	-12.158	-5
UNII6	6505	111	-8.208	-8.832	-5.499	-8.302	-9.053	-5.651	-8.400	-8.984	-5.672	-10.38	-10.60	-7.48	-12.978	-5
UNII7	6665	143	-8.589	-9.188	-5.868	-8.443	-9.347	-5.861	-8.567	-9.147	-5.837	-10.38	-10.60	-7.48	-13.316	-5
UNII8	6825	175	-7.901	-8.491	-5.176	-7.970	-8.417	-5.178	-7.916	-8.576	-5.223	-10.50	-10.12	-7.30	-12.474	-5
	6985	207	-8.248	-8.797	-5.504	-7.927	-8.763	-5.315	-7.983	-8.794	-5.360	-10.50	-10.12	-7.30	-12.612	-5

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.465	-10.505	-6.944	-8.908	-10.173	-6.485	-9.593	-10.864	-7.172	-10.07	-9.91	-6.98	-13.464	-5
	6185	47	-9.183	-9.340	-6.251	-9.725	-10.206	-6.949	-9.629	-10.180	-6.886	-10.07	-9.91	-6.98	-13.230	-5
	6345	79	-9.612	-10.537	-7.040	-9.442	-10.171	-6.781	-9.768	-10.981	-7.322	-10.07	-9.91	-6.98	-13.760	-5
UNII6	6505	111	-9.716	-10.301	-6.989	-10.048	-10.513	-7.264	-10.092	-10.418	-7.242	-10.38	-10.60	-7.48	-14.468	-5
UNII7	6665	143	-9.405	-9.792	-6.584	-9.665	-9.451	-6.547	-9.976	-10.368	-7.157	-10.38	-10.60	-7.48	-14.026	-5
UNII8	6825	175	-9.316	-10.827	-6.996	-9.629	-11.145	-7.311	-10.239	-11.372	-7.759	-10.50	-10.12	-7.30	-14.294	-5
	6985	207	-9.567	-10.536	-7.014	-9.382	-10.672	-6.969	-10.127	-11.247	-7.641	-10.50	-10.12	-7.30	-14.267	-5

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.659	-10.043	-6.285	-8.653	-10.347	-6.407	-8.677	-10.629	-6.534	-10.07	-9.91	-6.98	-13.265	-5
	6185	47	-8.723	-9.727	-6.185	-8.536	-9.687	-6.063	-8.955	-9.771	-6.333	-10.07	-9.91	-6.98	-13.042	-5
	6345	79	-8.967	-9.458	-6.195	-9.187	-9.516	-6.338	-9.618	-9.860	-6.727	-10.07	-9.91	-6.98	-13.174	-5
UNII6	6505	111	-9.813	-9.910	-6.851	-9.513	-9.872	-6.678	-9.751	-10.225	-6.971	-10.38	-10.60	-7.48	-14.157	-5
UNII7	6665	143	-9.228	-9.662	-6.429	-9.485	-9.913	-6.683	-9.964	-10.415	-7.173	-10.38	-10.60	-7.48	-13.908	-5
UNII8	6825	175	-9.027	-10.021	-6.485	-9.361	-10.249	-6.772	-10.187	-10.610	-7.383	-10.50	-10.12	-7.30	-13.783	-5
	6985	207	-9.351	-9.736	-6.529	-9.131	-9.677	-6.385	-9.499	-10.000	-6.732	-10.50	-10.12	-7.30	-13.682	-5

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.516	-9.821	-6.110	-8.574	-9.770	-6.121	-8.429	-9.924	-6.102	-10.07	-9.91	-6.98	-13.082	-5
	6185	47	-8.335	-8.830	-5.565	-8.503	-8.503	-5.493	-8.163	-8.842	-5.479	-10.07	-9.91	-6.98	-12.459	-5
	6345	79	-8.398	-8.246	-5.311	-8.566	-8.196	-5.367	-8.300	-8.666	-5.469	-10.07	-9.91	-6.98	-12.291	-5
UNII6	6505	111	-8.330	-8.832	-5.564	-8.453	-8.928	-5.674	-8.401	-8.833	-5.602	-10.38	-10.60	-7.48	-13.043	-5
UNII7	6665	143	-8.245	-9.410	-5.778	-8.188	-9.473	-5.773	-8.295	-9.242	-5.733	-10.38	-10.60	-7.48	-13.212	-5
UNII8	6825	175	-7.667	-8.652	-5.122	-7.537	-8.752	-5.092	-7.889	-8.586	-5.213	-10.50	-10.12	-7.30	-12.390	-5
	6985	207	-8.501	-8.819	-5.647	-8.152	-8.736	-5.424	-8.411	-8.567	-5.478	-10.50	-10.12	-7.30	-12.722	-5

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.408	-9.723	-6.006	-8.412	-9.611	-5.960	-8.632	-9.878	-6.201	-10.07	-9.91	-6.98	-12.940	-5
	6185	47	-8.363	-8.648	-5.493	-8.435	-8.877	-5.640	-8.279	-8.719	-5.484	-10.07	-9.91	-6.98	-12.463	-5
	6345	79	-8.095	-8.456	-5.262	-8.098	-8.294	-5.185	-8.326	-8.575	-5.439	-10.07	-9.91	-6.98	-12.164	-5
UNII6	6505	111	-8.566	-8.756	-5.650	-8.386	-9.291	-5.805	-8.430	-9.095	-5.740	-10.38	-10.60	-7.48	-13.129	-5
UNII7	6665	143	-8.064	-9.722	-5.804	-7.995	-9.582	-5.706	-8.228	-9.528	-5.820	-10.38	-10.60	-7.48	-13.185	-5
UNII8	6825	175	-7.419	-8.648	-4.980	-7.604	-8.489	-5.014	-7.725	-8.323	-5.004	-10.50	-10.12	-7.30	-12.278	-5
	6985	207	-8.277	-9.071	-5.646	-8.097	-9.030	-5.529	-8.260	-9.066	-5.634	-10.50	-10.12	-7.30	-12.826	-5

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.286	-10.560	-6.866	-9.145	-10.462	-6.743	-9.413	-10.561	-6.939	-10.07	-9.91	-6.98	-13.723	-5
	6185	47	-8.943	-9.754	-6.319	-9.131	-9.783	-6.434	-8.820	-9.793	-6.269	-10.07	-9.91	-6.98	-13.248	-5
	6345	79	-8.806	-9.119	-5.949	-8.961	-9.149	-6.044	-8.824	-9.233	-6.013	-10.07	-9.91	-6.98	-12.929	-5
UNII6	6505	111	-9.259	-9.876	-6.546	-9.069	-10.081	-6.535	-9.069	-9.986	-6.493	-10.38	-10.60	-7.48	-13.972	-5
UNII7	6665	143	-8.892	-9.922	-6.366	-8.978	-10.306	-6.581	-9.221	-10.199	-6.672	-10.38	-10.60	-7.48	-13.845	-5
UNII8	6825	175	-8.508	-9.400	-5.921	-8.575	-9.306	-5.915	-8.561	-9.397	-5.949	-10.50	-10.12	-7.30	-13.212	-5
	6985	207	-8.999	-9.710	-6.330	-8.964	-9.395	-6.164	-8.780	-9.609	-6.164	-10.50	-10.12	-7.30	-13.461	-5

Mode : EHT320(80LL) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-11.233	-12.214	-8.686	-10.484	-12.182	-8.240	-10.498	-11.841	-8.108	-10.07	-9.91	-6.98	-15.087	-5
	6265	63	-10.923	-10.525	-7.709	-10.485	-10.890	-7.673	-10.482	-10.487	-7.474	-10.07	-9.91	-6.98	-14.454	-5
UNII6	6425	95	-10.168	-10.218	-7.183	-10.563	-10.759	-7.650	-10.438	-10.342	-7.380	-10.38	-10.60	-7.48	-14.662	-5
	6585	127	-10.721	-11.572	-8.116	-10.098	-10.866	-7.455	-10.413	-10.842	-7.612	-10.38	-10.60	-7.48	-14.934	-5
UNII8	6745	159	-10.621	-11.796	-8.159	-10.330	-11.450	-7.844	-9.965	-10.732	-7.322	-10.50	-10.12	-7.30	-14.619	-5
	6905	191	-10.408	-11.998	-8.121	-10.310	-11.573	-7.886	-10.228	-11.441	-7.782	-10.50	-10.12	-7.30	-15.080	-5

Mode : EHT320(80LL) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-10.409	-10.782	-7.581	-10.314	-11.446	-7.833	-9.880	-11.231	-7.493	-10.07	-9.91	-6.98	-14.472	-5
	6265	63	-9.912	-10.732	-7.293	-10.071	-10.396	-7.220	-9.740	-10.054	-6.884	-10.07	-9.91	-6.98	-13.863	-5
UNII6	6425	95	-9.382	-9.696	-6.526	-9.276	-9.573	-6.412	-8.951	-9.177	-6.052	-10.38	-10.60	-7.48	-13.531	-5
	6585	127	-9.201	-9.616	-6.393	-8.921	-9.615	-6.244	-9.020	-9.449	-6.219	-10.38	-10.60	-7.48	-13.698	-5
UNII8	6745	159	-9.389	-10.669	-6.972	-9.704	-10.630	-7.132	-8.989	-10.417	-6.634	-10.50	-10.12	-7.30	-13.932	-5
	6905	191	-9.156	-10.598	-6.807	-8.656	-10.466	-6.457	-8.470	-10.015	-6.164	-10.50	-10.12	-7.30	-13.462	-5

Mode : EHT320(80LL) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.068	-9.419	-6.230	-9.064	-9.525	-6.278	-8.982	-9.628	-6.283	-10.07	-9.91	-6.98	-13.209	-5
	6265	63	-8.139	-9.119	-5.591	-7.889	-9.093	-5.439	-8.208	-9.279	-5.701	-10.07	-9.91	-6.98	-12.419	-5
UNII6	6425	95	-8.163	-9.970	-5.963	-7.824	-10.069	-5.793	-7.877	-9.296	-5.519	-10.38	-10.60	-7.48	-12.998	-5
	6585	127	-8.419	-8.216	-5.306	-8.499	-8.008	-5.236	-8.550	-8.101	-5.310	-10.38	-10.60	-7.48	-12.716	-5
UNII8	6745	159	-8.266	-8.168	-5.207	-8.230	-8.096	-5.152	-8.097	-8.121	-5.099	-10.50	-10.12	-7.30	-12.397	-5
	6905	191	-7.960	-8.533	-5.227	-7.906	-8.148	-5.015	-8.025	-8.528	-5.259	-10.50	-10.12	-7.30	-12.313	-5

Mode : EHT320(80LM) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-10.221	-11.717	-7.895	-9.247	-10.851	-6.965	-8.686	-9.777	-6.187	-10.07	-9.91	-6.98	-13.167	-5
	6265	63	-10.413	-10.267	-7.329	-9.942	-9.543	-6.728	-8.793	-8.698	-5.735	-10.07	-9.91	-6.98	-12.714	-5
UNII6	6425	95	-9.934	-9.985	-6.949	-9.254	-9.413	-6.323	-8.905	-8.812	-5.848	-10.38	-10.60	-7.48	-13.327	-5
	6585	127	-10.135	-11.053	-7.560	-9.390	-10.236	-6.782	-8.588	-8.741	-5.654	-10.38	-10.60	-7.48	-13.133	-5
UNII8	6745	159	-9.922	-10.748	-7.305	-9.019	-10.196	-6.558	-8.433	-9.539	-5.941	-10.50	-10.12	-7.30	-13.238	-5
	6905	191	-9.849	-11.166	-7.448	-9.021	-10.616	-6.736	-8.547	-9.531	-6.001	-10.50	-10.12	-7.30	-13.299	-5

Mode : EHT320(80LM) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-9.540	-10.367	-6.924	-8.795	-10.059	-6.371	-7.910	-9.088	-5.449	-10.07	-9.91	-6.98	-12.428	-5
	6265	63	-9.112	-9.919	-6.487	-8.916	-9.259	-6.074	-7.647	-8.428	-5.010	-10.07	-9.91	-6.98	-11.989	-5
UNII6	6425	95	-8.881	-8.865	-5.863	-8.435	-8.443	-5.429	-7.761	-7.509	-4.623	-10.38	-10.60	-7.48	-12.102	-5
	6585	127	-8.739	-9.119	-5.915	-8.109	-8.680	-5.375	-7.599	-7.597	-4.588	-10.38	-10.60	-7.48	-12.067	-5
UNII8	6745	159	-8.845	-10.357	-6.525	-8.344	-9.933	-6.056	-7.880	-8.916	-5.357	-10.50	-10.12	-7.30	-12.655	-5
	6905	191	-8.363	-9.857	-6.036	-7.985	-9.017	-5.460	-7.636	-8.444	-5.011	-10.50	-10.12	-7.30	-12.309	-5

Mode: EHT320(80LM) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.535	-9.216	-5.852	-8.457	-8.963	-5.693	-8.467	-9.199	-5.808	-10.07	-9.91	-6.98	-12.672	-5
	6265	63	-7.819	-8.562	-5.165	-7.761	-8.454	-5.084	-7.651	-8.534	-5.060	-10.07	-9.91	-6.98	-12.039	-5
UNII6	6425	95	-8.370	-9.629	-5.944	-8.155	-9.546	-5.785	-8.177	-9.447	-5.756	-10.38	-10.60	-7.48	-13.235	-5
	6585	127	-8.196	-7.874	-5.022	-8.105	-7.848	-4.965	-8.473	-8.052	-5.247	-10.38	-10.60	-7.48	-12.444	-5
UNII8	6745	159	-7.893	-8.291	-5.077	-7.910	-7.985	-4.937	-8.182	-7.968	-5.064	-10.50	-10.12	-7.30	-12.235	-5
	6905	191	-7.890	-8.353	-5.105	-7.846	-8.082	-4.952	-7.816	-8.227	-5.007	-10.50	-10.12	-7.30	-12.250	-5

Mode : EHT320(80MH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.622	-9.948	-6.225	-9.176	-10.601	-6.820	-9.909	-11.362	-7.565	-10.07	-9.91	-6.98	-13.204	-5
	6265	63	-8.789	-9.000	-5.883	-9.652	-9.991	-6.808	-10.450	-11.120	-7.762	-10.07	-9.91	-6.98	-12.862	-5
UNII6	6425	95	-8.406	-9.092	-5.725	-9.160	-9.496	-6.315	-10.083	-9.963	-7.013	-10.38	-10.60	-7.48	-13.204	-5
	6585	127	-8.762	-9.474	-6.093	-9.377	-9.833	-6.589	-10.057	-10.359	-7.195	-10.38	-10.60	-7.48	-13.572	-5
UNII8	6745	159	-8.622	-9.615	-6.080	-9.275	-9.837	-6.537	-9.928	-10.586	-7.234	-10.50	-10.12	-7.30	-13.378	-5
	6905	191	-8.874	-10.104	-6.436	-9.571	-10.773	-7.120	-10.544	-11.857	-8.141	-10.50	-10.12	-7.30	-13.733	-5

Mode: EHT320(80MH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.848	-9.332	-5.517	-8.177	-9.534	-5.793	-9.014	-10.912	-6.850	-10.07	-9.91	-6.98	-12.496	-5
	6265	63	-7.626	-8.297	-4.938	-8.418	-8.812	-5.600	-9.178	-9.705	-6.423	-10.07	-9.91	-6.98	-11.918	-5
UNII6	6425	95	-7.639	-7.839	-4.728	-8.617	-8.330	-5.461	-9.342	-9.104	-6.211	-10.38	-10.60	-7.48	-12.207	-5
	6585	127	-8.009	-7.910	-4.949	-8.525	-8.493	-5.499	-9.137	-9.757	-6.426	-10.38	-10.60	-7.48	-12.428	-5
UNII8	6745	159	-8.175	-9.132	-5.617	-8.573	-9.798	-6.132	-9.813	-10.530	-7.147	-10.50	-10.12	-7.30	-12.915	-5
	6905	191	-7.872	-8.283	-5.063	-8.895	-8.965	-5.920	-10.082	-9.819	-6.938	-10.50	-10.12	-7.30	-12.360	-5

Mode : EHT320(80MH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.689	-9.037	-5.849	-8.026	-8.543	-5.267	-8.540	-8.927	-5.719	-10.07	-9.91	-6.98	-12.246	-5
	6265	63	-7.892	-8.582	-5.213	-7.771	-8.068	-4.907	-7.786	-8.642	-5.183	-10.07	-9.91	-6.98	-11.886	-5
UNII6	6425	95	-8.046	-9.477	-5.693	-7.787	-9.329	-5.480	-8.136	-9.498	-5.754	-10.38	-10.60	-7.48	-12.959	-5
	6585	127	-8.090	-8.028	-5.049	-7.967	-7.213	-4.564	-7.988	-7.809	-4.888	-10.38	-10.60	-7.48	-12.043	-5
UNII8	6745	159	-7.746	-8.336	-5.021	-7.554	-7.926	-4.726	-7.901	-8.514	-5.187	-10.50	-10.12	-7.30	-12.024	-5
	6905	191	-7.970	-8.416	-5.177	-7.294	-8.056	-4.648	-7.816	-8.377	-5.077	-10.50	-10.12	-7.30	-11.946	-5

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-10.385	-11.831	-8.038	-10.767	-12.546	-8.556	-10.705	-12.522	-8.509	-10.07	-9.91	-6.98	-15.017	-5
	6265	63	-10.456	-11.387	-7.887	-10.539	-11.684	-8.064	-10.837	-11.731	-8.251	-10.07	-9.91	-6.98	-14.866	-5
UNII6	6425	95	-10.072	-10.092	-7.072	-10.101	-10.526	-7.298	-10.290	-10.823	-7.538	-10.38	-10.60	-7.48	-14.551	-5
	6585	127	-10.205	-10.873	-7.516	-10.325	-10.873	-7.580	-10.804	-11.615	-8.181	-10.38	-10.60	-7.48	-14.995	-5
UNII8	6745	159	-10.096	-10.887	-7.463	-10.617	-11.748	-8.136	-10.943	-11.500	-8.202	-10.50	-10.12	-7.30	-14.761	-5
	6905	191	-10.799	-11.561	-8.153	-11.276	-11.739	-8.491	-11.744	-12.331	-9.018	-10.50	-10.12	-7.30	-15.451	-5

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.152	-10.774	-6.878	-9.329	-10.961	-7.059	-9.401	-11.230	-7.210	-10.07	-9.91	-6.98	-13.857	-5
	6265	63	-9.145	-9.914	-6.502	-9.648	-9.637	-6.632	-9.719	-10.308	-6.993	-10.07	-9.91	-6.98	-13.482	-5
UNII6	6425	95	-9.494	-9.514	-6.494	-9.655	-9.818	-6.726	-9.968	-9.753	-6.849	-10.38	-10.60	-7.48	-13.973	-5
	6585	127	-9.516	-9.974	-6.729	-9.751	-9.986	-6.857	-10.251	-10.752	-7.484	-10.38	-10.60	-7.48	-14.208	-5
UNII8	6745	159	-9.904	-10.577	-7.217	-10.546	-11.025	-7.769	-10.809	-11.307	-8.041	-10.50	-10.12	-7.30	-14.515	-5
	6905	191	-9.935	-9.558	-6.732	-10.556	-9.828	-7.167	-11.072	-10.362	-7.692	-10.50	-10.12	-7.30	-14.030	-5

Mode : EHT320(80HH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.819	-8.977	-5.887	-8.700	-8.997	-5.836	-8.781	-9.039	-5.898	-10.07	-9.91	-6.98	-12.815	-5
	6265	63	-8.260	-8.916	-5.566	-8.319	-8.521	-5.409	-8.377	-8.691	-5.521	-10.07	-9.91	-6.98	-12.388	-5
UNII6	6425	95	-8.532	-9.796	-6.108	-8.313	-10.076	-6.096	-8.676	-10.094	-6.317	-10.38	-10.60	-7.48	-13.575	-5
	6585	127	-8.745	-8.747	-5.736	-8.353	-8.671	-5.499	-8.832	-8.564	-5.686	-10.38	-10.60	-7.48	-12.978	-5
UNII8	6745	159	-8.251	-8.794	-5.504	-8.163	-8.842	-5.479	-8.288	-8.587	-5.425	-10.50	-10.12	-7.30	-12.722	-5
	6905	191	-8.327	-8.553	-5.428	-7.965	-8.469	-5.200	-8.372	-8.644	-5.496	-10.50	-10.12	-7.30	-12.497	-5

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.767	-9.171	-5.402	-7.468	-8.991	-5.153	-8.278	-9.257	-5.730	-10.07	-9.91	-6.98	-12.132	-5
	6265	63	-6.870	-7.794	-4.297	-6.901	-7.934	-4.377	-7.565	-8.719	-5.093	-10.07	-9.91	-6.98	-11.276	-5
UNII6	6425	95	-7.344	-8.624	-4.927	-7.237	-8.781	-4.930	-7.232	-9.243	-5.112	-10.38	-10.60	-7.48	-12.406	-5
	6585	127	-7.805	-7.872	-4.828	-7.726	-7.576	-4.640	-8.391	-8.130	-5.248	-10.38	-10.60	-7.48	-12.119	-5
UNII8	6745	159	-7.571	-8.224	-4.875	-7.279	-8.377	-4.783	-8.032	-8.399	-5.201	-10.50	-10.12	-7.30	-12.081	-5
	6905	191	-7.377	-7.679	-4.515	-7.818	-7.666	-4.731	-7.670	-7.979	-4.811	-10.50	-10.12	-7.30	-11.813	-5

Mode : EHT320(160U) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-8.202	-8.680	-5.424	-7.845	-8.046	-4.934	-8.002	-8.590	-5.276	-10.07	-9.91	-6.98	-11.913	-5
	6265	63	-7.641	-8.266	-4.932	-7.162	-7.851	-4.483	-7.206	-8.227	-4.676	-10.07	-9.91	-6.98	-11.462	-5
UNII6	6425	95	-7.613	-9.132	-5.296	-7.243	-8.487	-4.810	-7.441	-8.391	-4.880	-10.38	-10.60	-7.48	-12.289	-5
	6585	127	-7.795	-7.651	-4.712	-7.433	-7.302	-4.357	-7.541	-7.512	-4.516	-10.38	-10.60	-7.48	-11.836	-5
UNII8	6745	159	-7.538	-8.333	-4.907	-6.704	-7.788	-4.202	-7.321	-8.200	-4.728	-10.50	-10.12	-7.30	-11.500	-5
	6905	191	-7.868	-8.320	-5.078	-7.087	-7.436	-4.248	-7.282	-8.052	-4.640	-10.50	-10.12	-7.30	-11.545	-5

Mode : EHT320 3x996T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	e.i.r.p	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-10.688	-11.612	-8.115	-10.699	-11.260	-7.960	-10.913	-11.649	-8.255	-10.07	-9.91	-6.98	-14.940	-5
	6265	63	-9.988	-10.916	-7.417	-9.744	-10.842	-7.248	-10.200	-11.288	-7.700	-10.07	-9.91	-6.98	-14.227	-5
UNII6	6425	95	-10.422	-11.472	-7.905	-10.162	-11.435	-7.742	-10.488	-11.814	-8.090	-10.38	-10.60	-7.48	-15.221	-5
	6585	127	-10.506	-10.536	-7.511	-10.446	-10.255	-7.339	-10.896	-10.811	-7.843	-10.38	-10.60	-7.48	-14.818	-5
UNII8	6745	159	-10.128	-11.518	-7.757	-10.090	-11.134	-7.570	-10.363	-11.504	-7.886	-10.50	-10.12	-7.30	-14.868	-5
	6905	191	-10.192	-10.734	-7.444	-10.138	-10.618	-7.361	-10.770	-10.686	-7.718	-10.50	-10.12	-7.30	-14.659	-5

Mode : EHT320 2x996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.996	-10.880	-7.406	-9.924	-10.657	-7.265	-10.078	-10.814	-7.421	-10.07	-9.91	-6.98	-14.245	-5
	6265	63	-9.299	-10.277	-6.751	-8.628	-10.385	-6.408	-9.539	-10.368	-6.924	-10.07	-9.91	-6.98	-13.388	-5
UNII6	6425	95	-9.641	-11.013	-7.263	-9.200	-10.858	-6.941	-9.564	-11.006	-7.216	-10.38	-10.60	-7.48	-14.420	-5
	6585	127	-10.142	-9.820	-6.968	-9.975	-9.945	-6.950	-9.976	-9.853	-6.904	-10.38	-10.60	-7.48	-14.383	-5
UNII8	6745	159	-9.686	-10.387	-7.013	-9.555	-10.436	-6.963	-9.386	-10.462	-6.881	-10.50	-10.12	-7.30	-14.179	-5
	6905	191	-9.635	-9.803	-6.708	-9.722	-9.676	-6.689	-9.590	-9.976	-6.769	-10.50	-10.12	-7.30	-13.987	-5

Mode : EHT320 3x996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum e.i.r.p	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-11.628	-12.230	-8.908	-11.462	-11.727	-8.582	-11.393	-12.636	-8.960	-10.07	-9.91	-6.98	-15.561	-5
	6265	63	-11.462	-12.329	-8.863	-10.638	-11.682	-8.118	-11.245	-12.011	-8.601	-10.07	-9.91	-6.98	-15.098	-5
UNII6	6425	95	-10.996	-13.086	-8.906	-10.918	-12.978	-8.816	-10.992	-12.754	-8.774	-10.38	-10.60	-7.48	-16.253	-5
	6585	127	-11.473	-11.065	-8.254	-10.697	-11.142	-7.903	-11.499	-11.652	-8.564	-10.38	-10.60	-7.48	-15.382	-5
UNII8	6745	159	-10.871	-11.787	-8.294	-11.342	-12.150	-8.717	-10.756	-11.817	-8.244	-10.50	-10.12	-7.30	-15.541	-5
	6905	191	-11.074	-12.332	-8.647	-11.538	-11.529	-8.523	-11.615	-11.509	-8.551	-10.50	-10.12	-7.30	-15.821	-5

▣ Test Plots(Power Spectral Density)
[MIMO_CDD(Ant1+Ant2)]

[Indoor Cilent]



Note: In order to simplify the report, attached plots were only channel of the highest PSD.

[SRU]



Ant.1

Ant.2

802.11be EHT20 Ch.93(6415 MHz) 242 Tones RU 61

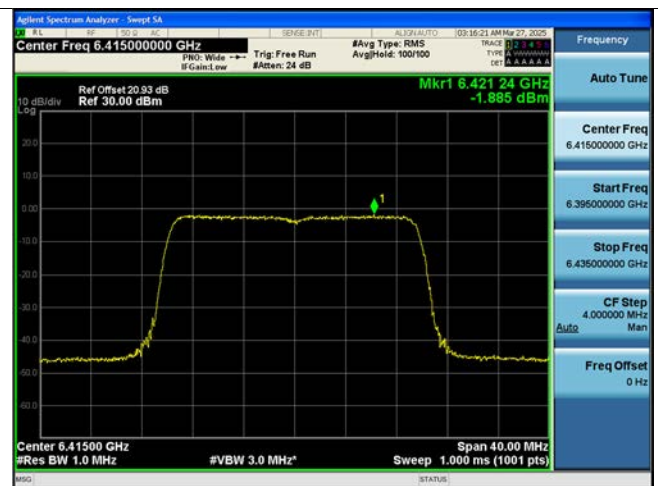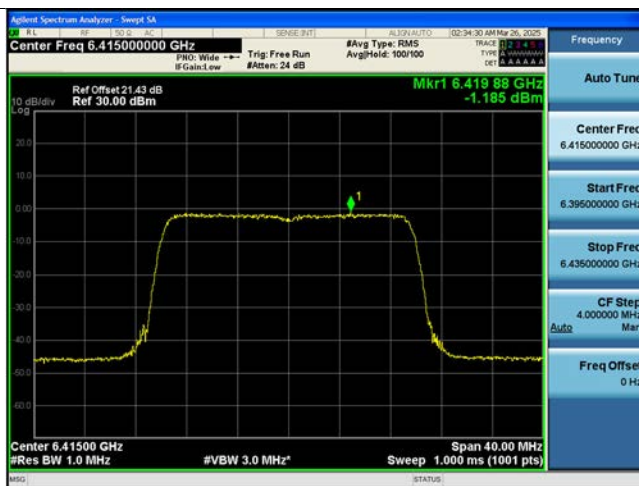



802.11be EHT40 Ch.211(7005 MHz) 242 Tones RU 62

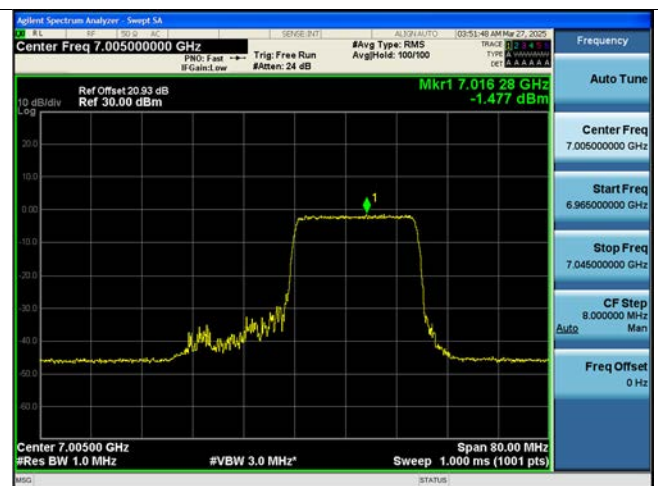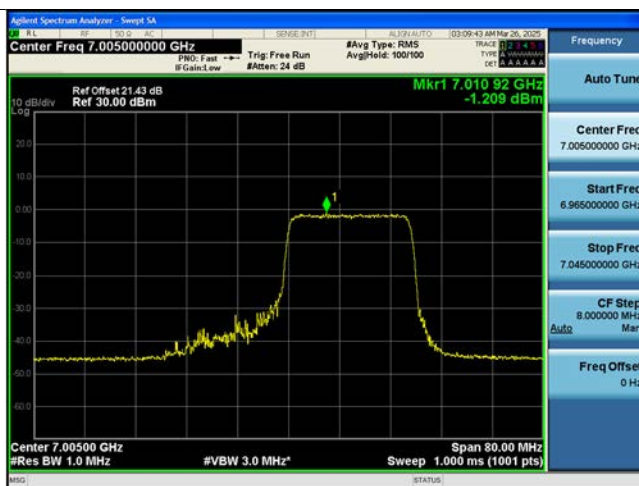

Ant.1

Ant.2

802.11be EHT80 Ch.199(6945 MHz) 242 Tones RU 62

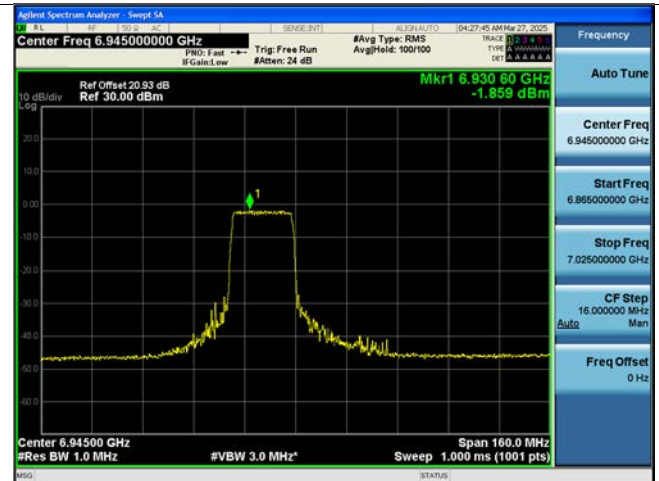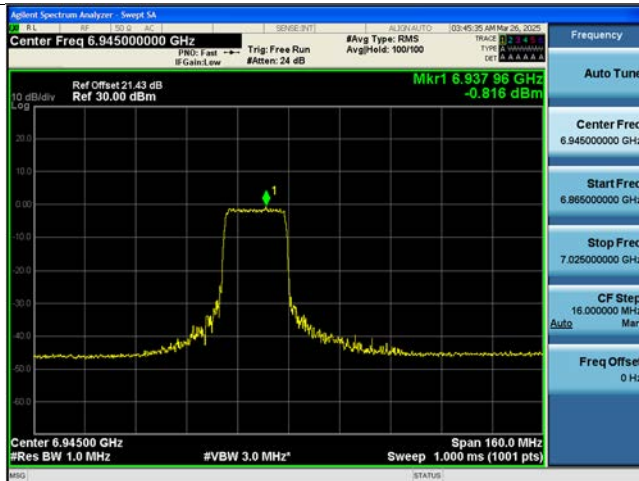

802.11be EHT160_80L Ch.79(6345 MHz) 242 Tones RU 61

