
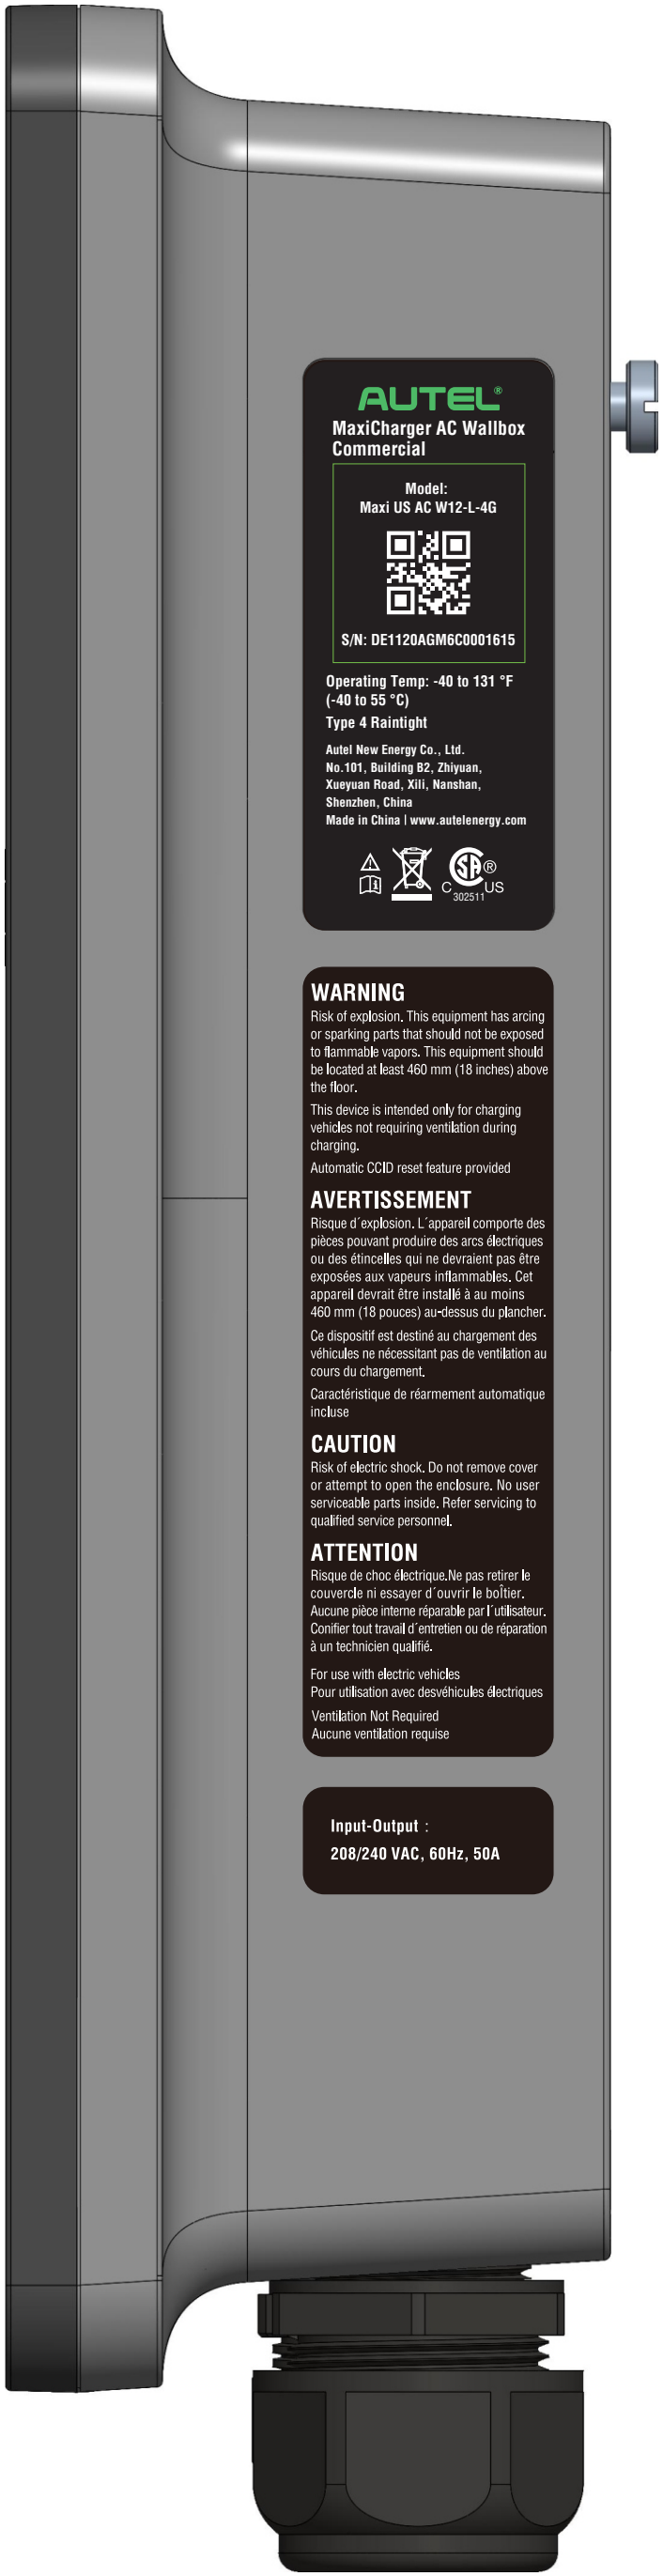


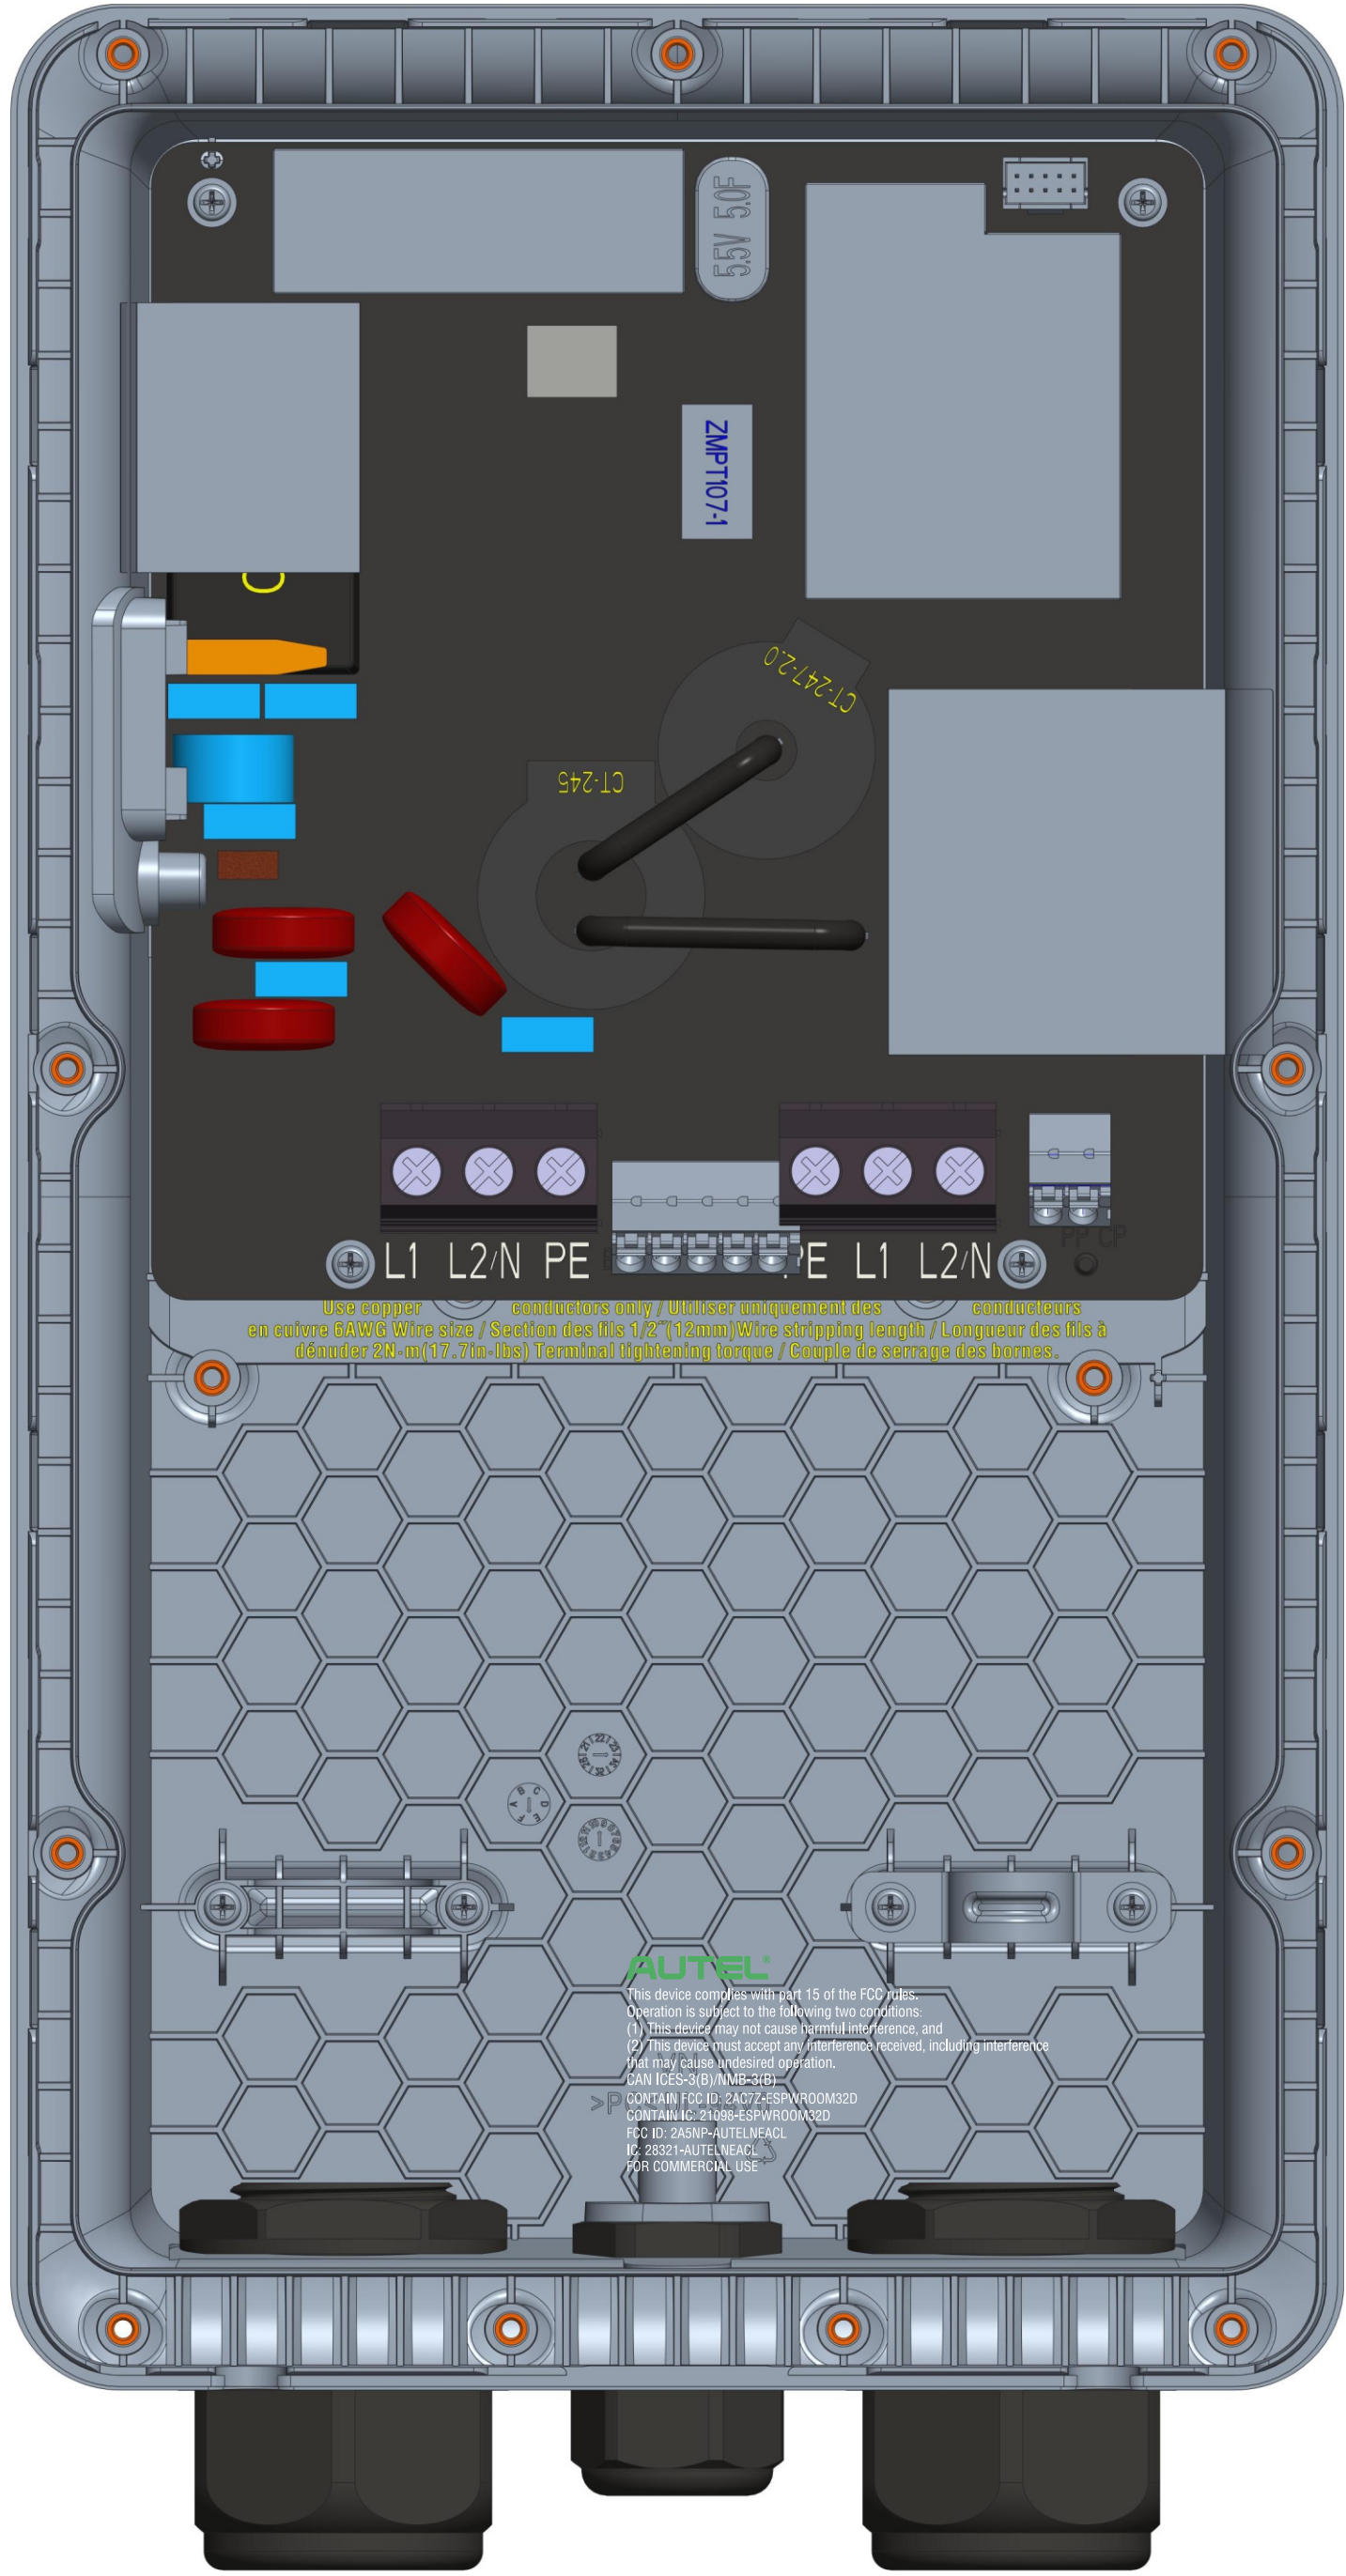

股份有限公司 t Technolog Corp.,Ltd.		TITLE:	
		机身贴纸	
DRAW:	何群	UNIT'S:	34.7x64.7x0.4mm
CHKD:	杨柳	FINISH:	
STAD:		MASS(Kg):	
APPD:	简振哲	SCALE:	
SHEET:	1 OF 1	PRODUCT:	美标交流桩
		Material:	PC磨砂(细砂)

AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W12-L-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W10-N14-L-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W10-N6-L-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W7-N14-L-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W7-N6-L-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W12-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W10-N14-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W10-N6-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W7-N14-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W7-N6-4G



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W12-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W10-N14-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W10-N6-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W7-N14-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Home**

Model:
Maxi US AC W7-N6-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W12-L- 4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W10-N14-L-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W10-N6-L-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W7-N14-L-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com



AUTEL®

**MaxiCharger AC Wallbox
Commercial**

Model:
Maxi US AC W7-N6-L-4G-H



S/N: DE1120AGM6C0001615

Operating Temp: -40 to 131 °F
(-40 to 55 °C)

Type 4 Raintight

Autel New Energy Co., Ltd.
No.101, Building B2, Zhiyuan,
Xueyuan Road, Xili, Nanshan,
Shenzhen, China
Made in China | www.autelenergy.com

