

FCC GSM/WCDMA REPORT

FCC Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

June 05, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Address:

129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do,
443-742 Rep. of Korea

Report No.: HCT-R-1506-F012

HCT FRN: 0005866421

FCC ID:

A3LSMG9198

APPLICANT:

SAMSUNG Electronics Co., Ltd.

FCC Model(s):

SM-G9198

EUT Type:

Mobile Phone

FCC Classification:

Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s):

§22, §24, §2

Folder open

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	249 KGXW	0.321	25.06
GSM850 EDGE			248 KG7W	0.070	18.42
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.038	15.78

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	245 KGXW	1.271	31.04
GSM1900 EDGE			244 KG7W	0.369	25.67
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M15F9W	0.313	24.96

Folder close

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	ERP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	0.250	23.99
GSM850 EDGE			0.060	17.82
WCDMA850	826.4 – 846.6	871.4 – 891.6	0.038	15.78

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	0.345	25.37
GSM1900 EDGE			0.104	20.15
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	0.097	19.87

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Kyoung Houn Seo
Test engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1506-F012	June 05, 2015	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. EUT DESCRIPTION.....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	8
3.2 PEAK- TO- AVERAGE RATIO	9
3.3 OCCUPIED BANDWIDTH.	11
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
4. LIST OF TEST EQUIPMENT	14
5. SUMMARY OF TEST RESULTS	15
6. SAMPLE CALCULATION	16
7. TEST DATA	17
7.1 EFFECTIVE RADIATED POWER_Folder open.....	17
7.2 EQUIVALENT ISOTROPIC RADIATED POWER_Folder open	18
7.3 EFFECTIVE RADIATED POWER_Folder close	19
7.4 EQUIVALENT ISOTROPIC RADIATED POWER_Folder close.....	20
7.5 RADIATED SPURIOUS EMISSIONS_Folder open	21
7.5.1 RADIATED SPURIOUS EMISSIONS (GSM850)	21
7.5.2 RADIATED SPURIOUS EMISSIONS (GSM1900)	22
7.5.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)	23
7.5.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	24
7.6 RADIATED SPURIOUS EMISSIONS_Folder close.....	25
7.6.1 RADIATED SPURIOUS EMISSIONS (GSM850)	25
7.6.2 RADIATED SPURIOUS EMISSIONS (GSM1900)	26
7.6.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)	27
7.6.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	28
7.7 PEAK-TO-AVERAGE RATIO	29
7.8 OCCUPIED BANDWIDTH	30
7.9 CONDUCTED SPURIOUS EMISSIONS	31
7.9.1 BAND EDGE.....	31
7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
7.10.1 FREQUENCY STABILITY (GSM850).....	32
7.10.2 FREQUENCY STABILITY (GSM1900).....	33

7.10.3 FREQUENCY STABILITY (WCDMA850).....	34
7.10.4 FREQUENCY STABILITY (WCDMA1900).....	35
8. TEST PLOTS.....	36

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: SAMSUNG Electronics Co., Ltd.

Address: 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea

FCC ID: A3LSMG9198

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Mobile Phone

FCC Model(s): SM-G9198

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 MHz (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power: **Folder open**
0.321 W GSM850 (25.06 dBm) / 1.271 W GSM1900 (31.04 dBm)
0.070 W GSM850 EDGE (18.42 dBm) / 0.369 W GSM1900 EDGE (25.67 dBm)
0.038 W WCDMA850 (15.78 dBm) / 0.313 W WCDMA1900 (24.96 dBm)
Folder close
0.250 W GSM850 (23.99 dBm) / 0.345 W GSM1900 (25.37 dBm)
0.060 W GSM850 EDGE (17.82 dBm) / 0.104 W GSM1900 EDGE (20.15 dBm)
0.038 W WCDMA850 (15.78 dBm) / 0.097 W WCDMA1900 (19.87 dBm)

Emission Designator(s): 249 KGXW (GSM850) 245 KGXW (GSM1900)
248 KG7W (GSM850 EDGE) 244 KG7W (GSM1900 EDGE)
4M16F9W (WCDMA850) 4M15F9W (WCDMA1900)

Date(s) of Tests: April 24, 2015 ~ June 04, 2015

Antenna Specification Manufacturer: RFTech Co., LTD.
Antenna type: Internal Antenna
Peak Gain: GSM850/ WCDMA850 : -1.530 dBi
GSM1900/ WCDMA1900 : 2.617 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The SAMSUNG Electronics Co., Ltd. SM-G9198 Mobile Phone consists of GPRS Class33, EDGE33, GSM850, GSM1900, WCDMA850, WCDMA1900, HSDPA, HSUPA, HSPA Release8 and HSPA+

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.
2. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 10 GHz(GSM850/WCDMA850) or 20 GHz(GSM1900/WCDMA1900). The high, low and a middle channel were tested for out of band measurements.

3.2 PEAK- TO- AVERAGE RATIO

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

- Section 5.7.1 CCDF Procedure for PAPR

- a) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure for PAPR

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW $\geq$ OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points $\geq$ span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

3.3 OCCUPIED BANDWIDTH.

Test set-up

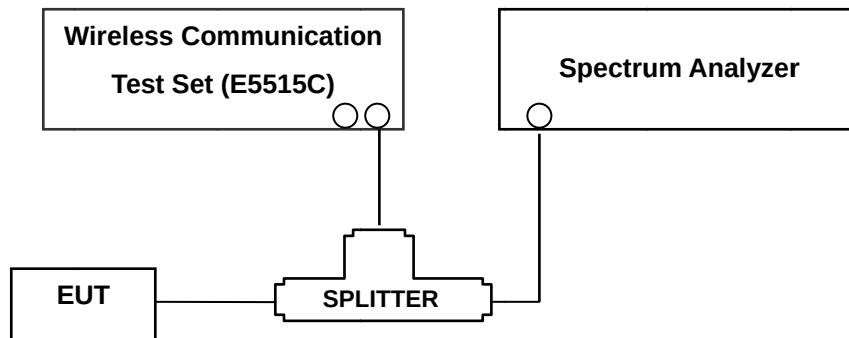

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at - 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW $\geq$ 3 MHz in the worst case despite RBW = 100 kHz and VBW $\geq$ 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917, 24.238 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

In GSM mode, the center frequency of spectrum set to the band edge frequency. The span is 1MHz (RBW = at least 1 % of the EBW, VBW $\geq 3*RBW$, Detector = Average).


In WCDMA mode, the center frequency of spectrum set to the band edge frequency. The span is 7MHz (RBW = at least 1% of the EBW, $\geq 3*RBW$, Detector = Average).

NOTES: The analyzer plot offsets were determined by below conditions.

- For GSM850 and WCDMA850, total offset 26.8 dB = 20 dB attenuator + 6 dB Splitter + 0.8 dB RF cables.
- For GSM1900 and WCDMA1900, total offset 27.7 dB = 20 dB attenuator + 6 dB Splitter + 1.7 dB RF cables.

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

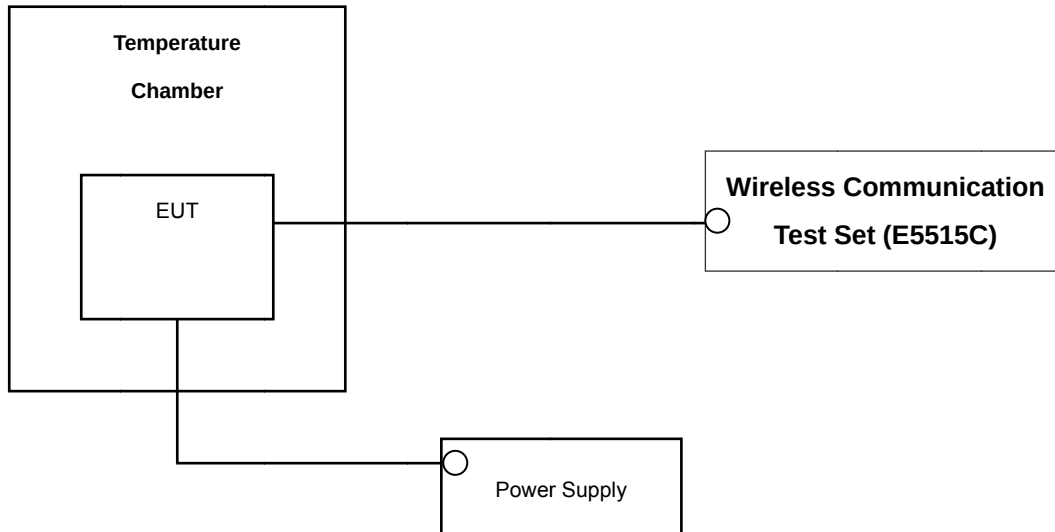

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(GSM1900/WCDMA1900). The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency(GSM850/WCDMA850).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/15/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	04/27/2016
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	04/27/2016
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	04/29/2016
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	07/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	03/18/2016
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/04/2016
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
* 2.1046	Conducted Output Power	-		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm (Part22)}$		PASS
24.235		Emission must remain in band (Part24)		PASS
22.913(a)(2)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
24.232(c)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{SubstituteLEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER_Folder open

(GSM850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
128	824.20	-27.33	34.61	-10.59	0.88	H	0.206	23.14
190	836.60	-26.34	35.31	-10.53	0.89	H	0.245	23.89
251	848.80	-24.52	36.43	-10.48	0.89	H	0.321	25.06
EDGE 251	848.80	-31.16	29.79	-10.48	0.89	H	0.070	18.42

(WCDMA850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
4132	826.40	-34.88	27.24	-10.58	0.88	H	0.038	15.78
4183	836.60	-34.73	26.92	-10.53	0.89	H	0.036	15.50
4233	846.60	-33.95	27.09	-10.49	0.89	V	0.037	15.71

Note: Standard batteries are the only options for this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW $\geq$ OBW, VBW $\geq$ 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 and WCDMA850 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER_Folder open

(GSM1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
512	1,850.20	-12.36	20.33	10.04	1.36	H	0.795	29.01
661	1,880.00	-12.18	20.78	10.05	1.37	H	0.884	29.46
810	1,909.80	-10.86	22.36	10.06	1.38	H	1.271	31.04
EDGE 810	1909.80	-16.23	16.99	10.06	1.38	H	0.369	25.67

(WCDMA1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
9262	1,852.40	-17.66	15.04	10.04	1.36	H	0.236	23.72
9400	1,880.00	-17.27	15.69	10.05	1.37	H	0.274	24.37
9538	1,907.60	-16.90	16.28	10.06	1.38	H	0.313	24.96

Note: Standard batteries are the only options for this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW $\geq$ OBW, VBW $\geq$ 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.3 EFFECTIVE RADIATED POWER_Folder close

(GSM850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
128	824.20	-26.48	35.46	-10.59	0.88	H	0.250	23.99
190	836.60	-26.58	35.07	-10.53	0.89	H	0.232	23.65
251	848.80	-26.10	34.85	-10.48	0.89	H	0.223	23.48
EDGE 128	824.20	-32.65	29.29	-10.59	0.88	H	0.060	17.82

(WCDMA850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
4132	826.40	-34.88	27.24	-10.58	0.88	H	0.038	15.78
4183	836.60	-34.73	26.92	-10.53	0.89	H	0.036	15.50
4233	846.60	-33.95	27.09	-10.49	0.89	V	0.037	15.71

Note: Standard batteries are the only options for this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW $\geq$ OBW, VBW $\geq$ 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 and WCDMA850 (channel 4233 : vertical polarization) mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.4 EQUIVALENT ISOTROPIC RADIATED POWER_Folder close

(GSM1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
512	1,850.20	-16.36	16.33	10.04	1.36	H	0.317	25.01
661	1,880.00	-16.27	16.69	10.05	1.37	H	0.345	25.37
810	1,909.80	-16.98	16.24	10.06	1.38	H	0.311	24.92
EDGE 661	1880.00	-21.49	11.47	10.05	1.37	H	0.104	20.15

(WCDMA1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
9262	1,852.40	-21.51	11.19	10.04	1.36	H	0.097	19.87
9400	1,880.00	-21.83	11.13	10.05	1.37	H	0.096	19.81
9538	1,907.60	-22.56	10.62	10.06	1.38	H	0.085	19.30

Note: Standard batteries are the only options for this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW $\geq$ OBW, VBW $\geq$ 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.5 RADIATED SPURIOUS EMISSIONS_Folder open

7.5.1 RADIATED SPURIOUS EMISSIONS (GSM850)

☒ MEASURED OUTPUT POWER: 25.06 dBm = 0.321 W
☒ MODULATION SIGNAL: GSM850
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 38.06 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-55.14	9.71	-63.47	1.29	V	-55.05	80.11
	2,472.60	-55.74	10.54	-61.22	1.60	V	-52.28	77.34
	3,296.80	-57.57	12.21	-62.84	1.85	V	-52.48	77.54
190 (836.6)	1,673.20	-54.21	9.77	-62.70	1.28	V	-54.21	79.27
	2,509.80	-56.37	10.65	-61.65	1.61	V	-52.61	77.67
	3,346.40	-57.79	12.41	-63.48	1.86	V	-52.93	77.99
251 (848.8)	1,697.60	-54.50	9.85	-63.00	1.30	V	-54.45	79.51
	2,546.40	-57.43	10.72	-62.61	1.64	H	-53.53	78.59
	3,395.20	-56.59	12.39	-62.11	1.88	H	-51.60	76.66

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

- We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.5.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

■ MEASURED OUTPUT POWER: 31.04 dBm = 1.271 W
 ■ MODULATION SIGNAL: GSM1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: $43 + 10 \log_{10}(W) =$ 44.04 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-52.73	12.32	-57.29	2.03	H	-47.00	78.04
	5,550.60	-55.63	13.02	-54.95	2.52	V	-44.45	75.49
	7,400.80	-58.13	11.06	-49.25	2.91	H	-41.10	72.14
661 (1880.0)	3,760.00	-50.00	12.29	-54.47	1.93	V	-44.11	75.15
	5,640.00	-52.67	13.12	-52.19	2.57	V	-41.64	72.68
	7,520.00	-56.77	11.09	-48.27	3.03	H	-40.21	71.25
810 (1909.8)	3,819.60	-48.76	12.28	-52.52	2.04	V	-42.28	73.32
	5,729.40	-53.14	13.06	-52.47	2.55	H	-41.96	73.00
	7,639.20	-58.01	11.38	-49.00	3.11	H	-40.73	71.77

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.5.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

☒ MEASURED OUTPUT POWER: 15.78 dBm = 0.038 W
☒ MODULATION SIGNAL: WCDMA850
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 28.78 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-57.66	9.71	-66.00	1.29	H	-57.58	73.36
	2,479.20	-57.69	10.54	-63.11	1.61	H	-54.18	69.96
	3,305.60	-57.78	12.26	-63.16	1.86	V	-52.76	68.54
4,183 (836.6)	1,673.20	-57.46	9.77	-65.94	1.28	H	-57.45	73.23
	2,509.80	-57.17	10.65	-62.55	1.61	H	-53.51	69.29
	3,346.40	-57.57	12.41	-63.26	1.86	H	-52.71	68.49
4,233 (846.6)	1,693.20	-57.17	9.83	-65.72	1.30	V	-57.19	72.97
	2,539.80	-57.15	10.71	-62.37	1.63	V	-53.29	69.07
	3,386.40	-57.73	12.40	-63.38	1.84	H	-52.82	68.60

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.5.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

☒ MEASURED OUTPUT POWER: 24.96 dBm = 0.313 W
☒ MODULATION SIGNAL: WCDMA1900
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 37.96 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-56.43	12.32	-60.95	2.01	H	-50.64	75.60
	5,557.20	-57.80	13.03	-57.08	2.53	V	-46.58	71.54
	7,409.60	-57.26	11.05	-48.16	2.92	H	-40.03	64.99
9400 (1880.0)	3,760.00	-56.96	12.29	-61.46	1.93	H	-51.10	76.06
	5,640.00	-57.14	13.12	-56.60	2.57	V	-46.05	71.01
	7,520.00	-57.00	11.09	-48.56	3.03	V	-40.50	65.46
9538 (1907.6)	3,815.20	-54.03	12.28	-58.13	2.04	V	-47.89	72.85
	5,722.80	-57.55	13.80	-57.48	2.57	V	-46.25	71.21
	7,630.40	-56.49	11.36	-47.42	3.19	V	-39.25	64.21

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6 RADIATED SPURIOUS EMISSIONS_Folder close

7.6.1 RADIATED SPURIOUS EMISSIONS (GSM850)

☐ MEASURED OUTPUT POWER: 23.99 dBm = 0.250 W
☐ MODULATION SIGNAL: GSM850
☐ DISTANCE: 3 meters
☐ LIMIT: $43 + 10 \log_{10}(W) =$ 36.99 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-55.27	9.71	-63.61	1.29	H	-55.19	79.18
	2,472.60	-57.00	10.54	-62.48	1.60	H	-53.54	77.53
	3,296.80	-57.96	12.21	-63.23	1.85	H	-52.87	76.86
190 (836.6)	1,673.20	-54.94	9.77	-63.43	1.28	V	-54.94	78.93
	2,509.80	-56.71	10.65	-61.99	1.61	H	-52.95	76.94
	3,346.40	-57.99	12.41	-63.67	1.86	H	-53.12	77.11
251 (848.8)	1,697.60	-56.04	9.85	-64.53	1.30	H	-55.98	79.97
	2,546.40	-57.80	10.72	-62.98	1.64	V	-53.90	77.89
	3,395.20	-57.71	12.39	-63.23	1.88	H	-52.72	76.71

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

- We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

☒ MEASURED OUTPUT POWER: 25.37 dBm = 0.345 W
☒ MODULATION SIGNAL: GSM1900
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 38.37 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-52.04	12.32	-56.60	2.03	H	-46.31	71.68
	5,550.60	-55.33	13.02	-54.65	2.52	V	-44.15	69.52
	7,400.80	-58.47	11.06	-49.58	2.91	V	-41.43	66.80
661 (1880.0)	3,760.00	-49.54	12.29	-54.00	1.93	V	-43.64	69.01
	5,640.00	-53.51	13.12	-53.04	2.57	H	-42.49	67.86
	7,520.00	-56.34	11.09	-47.84	3.03	V	-39.78	65.15
810 (1909.8)	3,819.60	-48.26	12.28	-52.02	2.04	V	-41.78	67.15
	5,729.40	-53.49	13.06	-52.82	2.55	H	-42.31	67.68
	7,639.20	-57.51	11.38	-48.49	3.11	H	-40.22	65.59

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

■ MEASURED OUTPUT POWER: 15.78 dBm = 0.038 W
 ■ MODULATION SIGNAL: WCDMA850
 ■ DISTANCE: 3 meters
 ■ LIMIT: $43 + 10 \log_{10}(W) =$ 28.78 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-56.75	9.71	-65.09	1.29	H	-56.67	72.45
	2,479.20	-57.35	10.54	-62.76	1.61	V	-53.83	69.61
	3,305.60	-57.91	12.26	-63.29	1.86	V	-52.89	68.67
4,183 (836.6)	1,673.20	-57.67	9.77	-66.15	1.28	H	-57.66	73.44
	2,509.80	-57.28	10.65	-62.67	1.61	V	-53.63	69.41
	3,346.40	-57.25	12.41	-62.94	1.86	H	-52.39	68.17
4,233 (846.6)	1,693.20	-58.07	9.83	-66.62	1.30	V	-58.09	73.87
	2,539.80	-57.45	10.71	-62.67	1.63	H	-53.57	69.35
	3,386.40	-58.66	12.40	-64.31	1.84	V	-53.75	69.53

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

■ MEASURED OUTPUT POWER: 19.87 dBm = 0.097 W
 ■ MODULATION SIGNAL: WCDMA1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: $43 + 10 \log_{10}(W) =$ 32.87 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-58.35	12.32	-62.87	2.01	V	-52.56	72.43
	5,557.20	-58.04	13.03	-57.32	2.53	H	-46.82	66.69
	7,409.60	-57.75	11.05	-48.65	2.92	H	-40.52	60.39
9400 (1880.0)	3,760.00	-56.18	12.29	-60.68	1.93	V	-50.32	70.19
	5,640.00	-57.55	13.12	-57.02	2.57	V	-46.47	66.34
	7,520.00	-56.80	11.09	-48.36	3.03	V	-40.30	60.17
9538 (1907.6)	3,815.20	-56.68	12.28	-60.78	2.04	H	-50.54	70.41
	5,722.80	-57.95	13.80	-57.88	2.57	V	-46.65	66.52
	7,630.40	-58.03	11.36	-48.96	3.19	H	-40.79	60.66

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.7 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	28.58	19.30	4.6232	0.5507	9.24	0.04	13	Pass
GSM1900 EDGE	661	26.73	13.93				3.56		
WCDMA1900	9400	CCDF Procedure					3.37		

- Plots of the EUT's Peak- to- Average Ratio are shown Page 41 ~ 43, 46.

NOTES:

Peak to Average Power Ratio was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

Only GSM(include EDGE) Mode was tested by Section 5.7.2 Alternate Procedure

$P.A.R_{(dB)} = P_{PK} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \log (1/x)$, $x = Tx_{On} / Tx_{Total}$

7.8 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	249.4349
	190	836.60	243.5184
	251	848.80	246.9055
GSM850 EDGE	128	824.20	247.8814
GSM1900	512	1,850.20	245.1739
	661	1,880.00	244.0675
	810	1,909.80	243.0280
GSM1900 EDGE	512	1,850.20	244.0337
WCDMA850	512	1,850.20	4.1237
	4183	836.60	4.1553
	4233	846.60	4.1350
WCDMA1900	9262	1852.40	4.1455
	9400	1880.00	4.1395
	9538	1907.60	4.1372

- Plots of the EUT's Occupied Bandwidth are shown Page 37 ~ 40, 43 ~ 46.

7.9 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.785540	-30.09
	190	4.630480	-30.49
	251	3.723460	-30.07
GSM1900	512	6.983830	-28.60
	661	5.734580	-28.92
	810	6.993800	-28.74
WCDMA850	4132	4.904820	-30.70
	4183	4.931660	-29.89
	4233	4.760200	-30.43
WCDMA1900	9262	6.957900	-28.46
	9400	6.965880	-28.66
	9538	6.971860	-28.49

- Plots of the EUT's Conducted Spurious Emissions are shown Page 63 ~ 74.

7.9.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 47 ~ 62.

7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.10.1 FREQUENCY STABILITY (GSM850)

■ OPERATING FREQUENCY: 836,600,000 Hz
 ■ CHANNEL: 190
 ■ REFERENCE VOLTAGE: 3.8 VDC
 ■ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 599 976	0	0.000 000	0.000
100%		-30	836 600 012	35.82	0.000 004	0.043
100%		-20	836 599 999	22.57	0.000 003	0.027
100%		-10	836 599 996	20.16	0.000 002	0.024
100%		0	836 600 001	24.86	0.000 003	0.030
100%		+10	836 600 001	24.67	0.000 003	0.029
100%		+30	836 600 006	29.83	0.000 004	0.036
100%		+40	836 600 003	27.28	0.000 003	0.033
100%		+50	836 600 004	28.23	0.000 003	0.034
Batt. Endpoint	3.23	+20	836 600 004	27.38	0.000 003	0.033

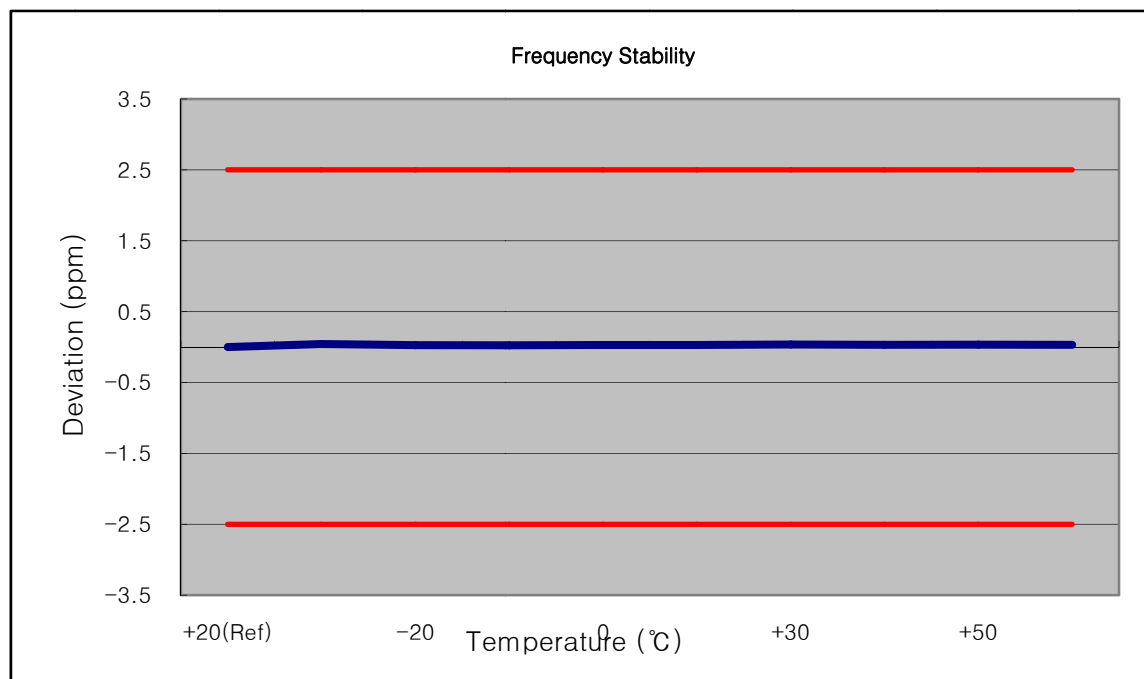

7.10.2 FREQUENCY STABILITY (GSM1900)

☒ OPERATING FREQUENCY: 1880,000,000 Hz
☒ CHANNEL: 661
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1879 999 957	0	0.000 000	0.000
100%		-30	1879 999 996	39.18	0.000 002	0.021
100%		-20	1880 000 010	52.47	0.000 003	0.028
100%		-10	1880 000 010	52.79	0.000 003	0.028
100%		0	1880 000 008	51.00	0.000 003	0.027
100%		+10	1880 000 006	48.66	0.000 003	0.026
100%		+30	1880 000 000	42.81	0.000 002	0.023
100%		+40	1880 000 001	44.16	0.000 002	0.023
100%		+50	1879 999 999	42.12	0.000 002	0.022
Batt. Endpoint	3.23	+20	1879 999 998	40.34	0.000 002	0.021

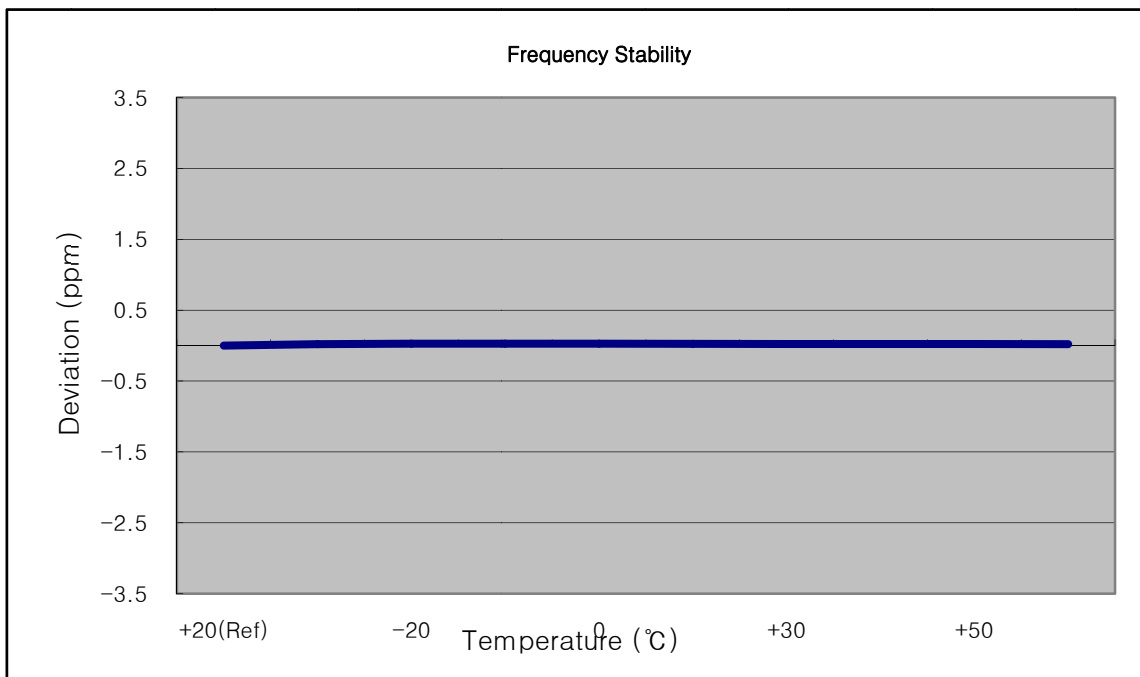

7.10.3 FREQUENCY STABILITY (WCDMA850)

☒ OPERATING FREQUENCY: 836,600,000 Hz
☒ CHANNEL: 4183
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 600 003	0	0.000 000	0.000
100%		-30	836 599 997	-3.33	0.000 000	-0.004
100%		-20	836 599 997	-3.07	0.000 000	-0.004
100%		-10	836 599 996	-4.29	-0.000 001	-0.005
100%		0	836 599 996	-4.13	0.000 000	-0.005
100%		+10	836 599 997	-3.05	0.000 000	-0.004
100%		+30	836 599 997	-3.29	0.000 000	-0.004
100%		+40	836 599 997	-3.50	0.000 000	-0.004
100%		+50	836 599 997	-2.85	0.000 000	-0.003
Batt. Endpoint	3.23	+20	836 599 997	-3.26	0.000 000	-0.004

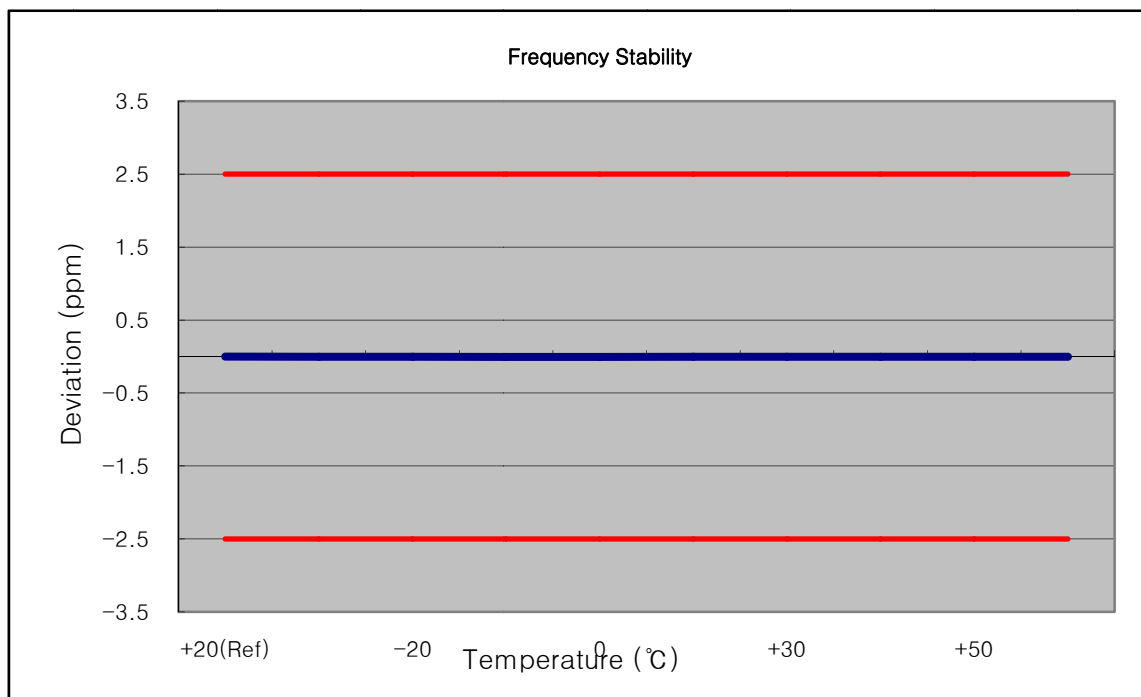

7.10.4 FREQUENCY STABILITY (WCDMA1900)


☒ OPERATING FREQUENCY: 1,880,000,000 Hz
☒ CHANNEL: 9400
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 007	0	0.000 000	0.000
100%		-30	1879 999 994	-5.88	0.000 000	-0.003
100%		-20	1879 999 993	-6.65	0.000 000	-0.004
100%		-10	1879 999 994	-5.81	0.000 000	-0.003
100%		0	1879 999 994	-6.46	0.000 000	-0.003
100%		+10	1879 999 995	-5.37	0.000 000	-0.003
100%		+30	1879 999 993	-7.01	0.000 000	-0.004
100%		+40	1879 999 993	-6.61	0.000 000	-0.004
100%		+50	1879 999 994	-6.03	0.000 000	-0.003
Batt. Endpoint	3.23	+20	1879 999 993	-7.31	0.000 000	-0.004

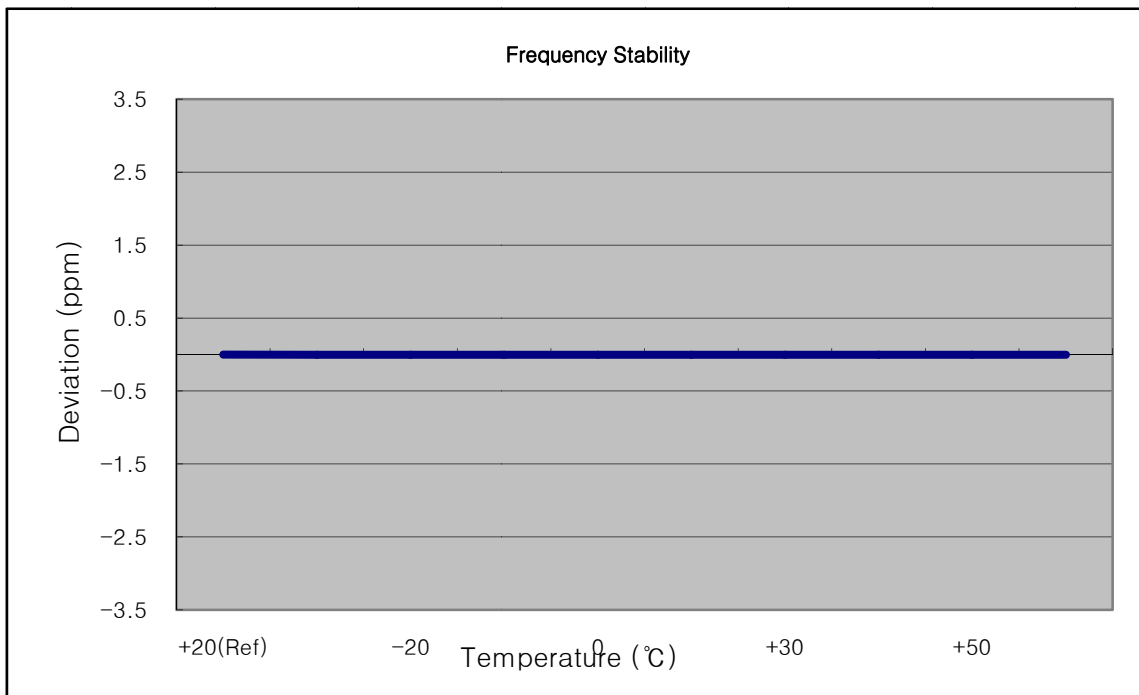


8. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

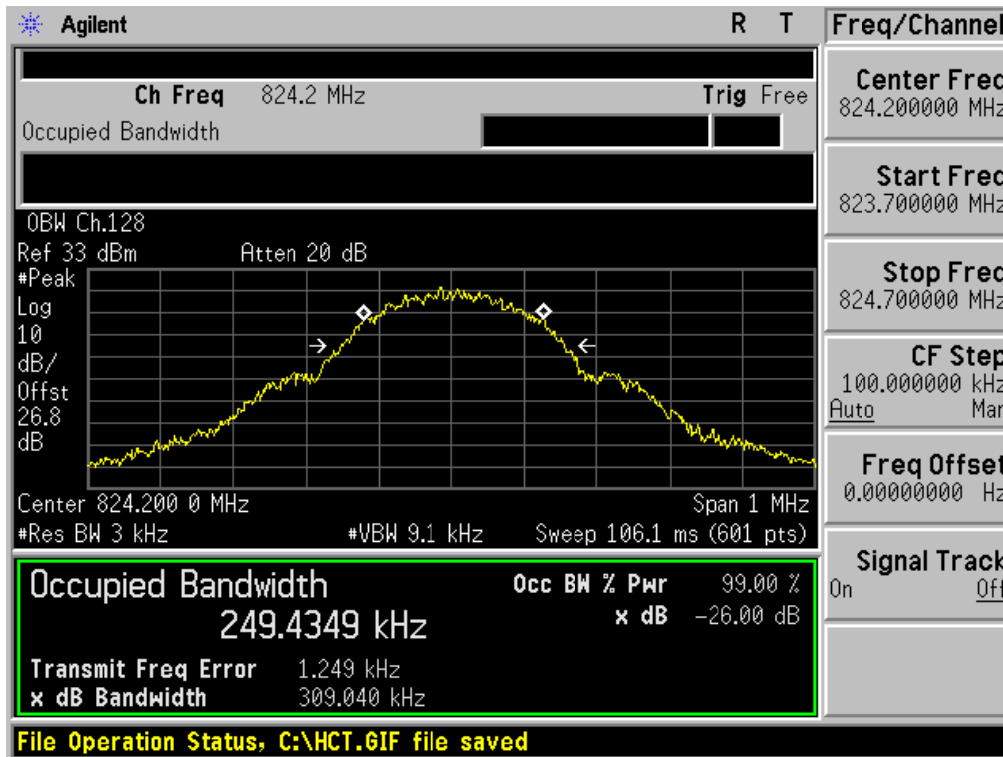


■ GSM850 MODE (190 CH.) Occupied Bandwidth

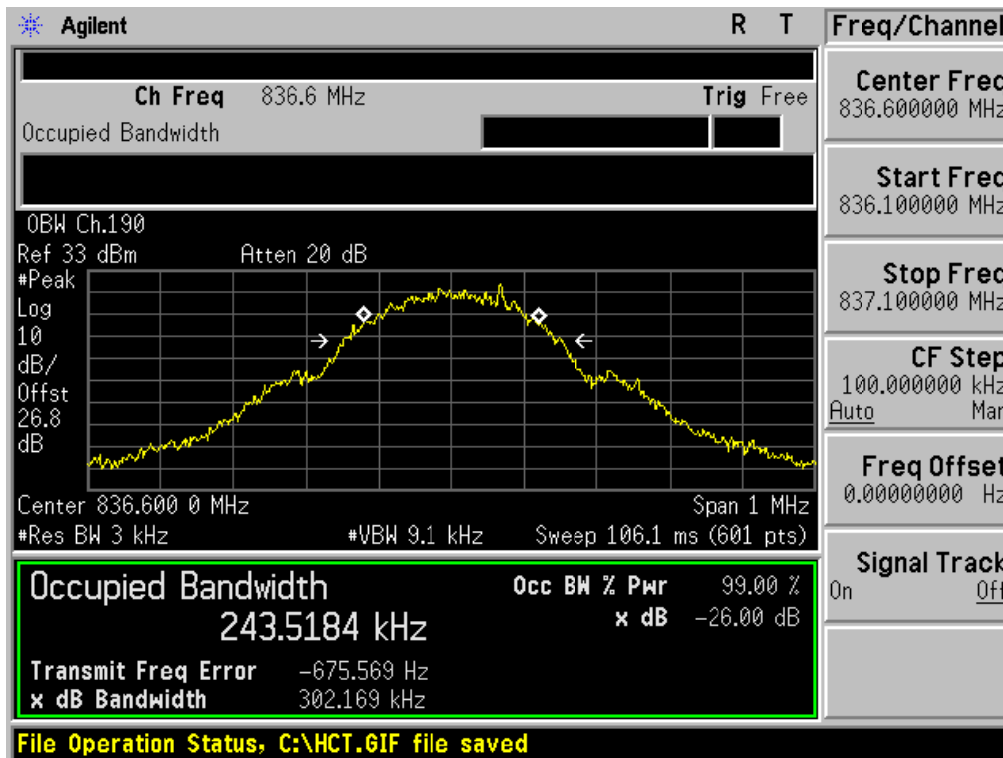


■ GSM850 MODE (251 CH.) Occupied Bandwidth

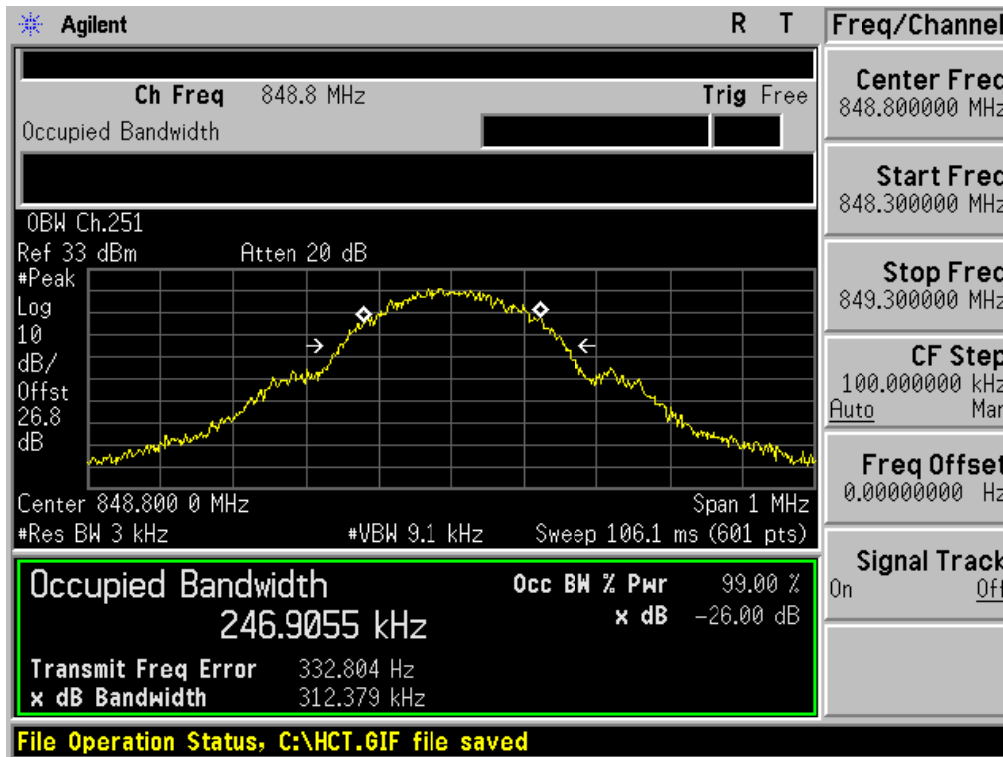


■ GSM850 EDGE (128 CH.) Occupied Bandwidth

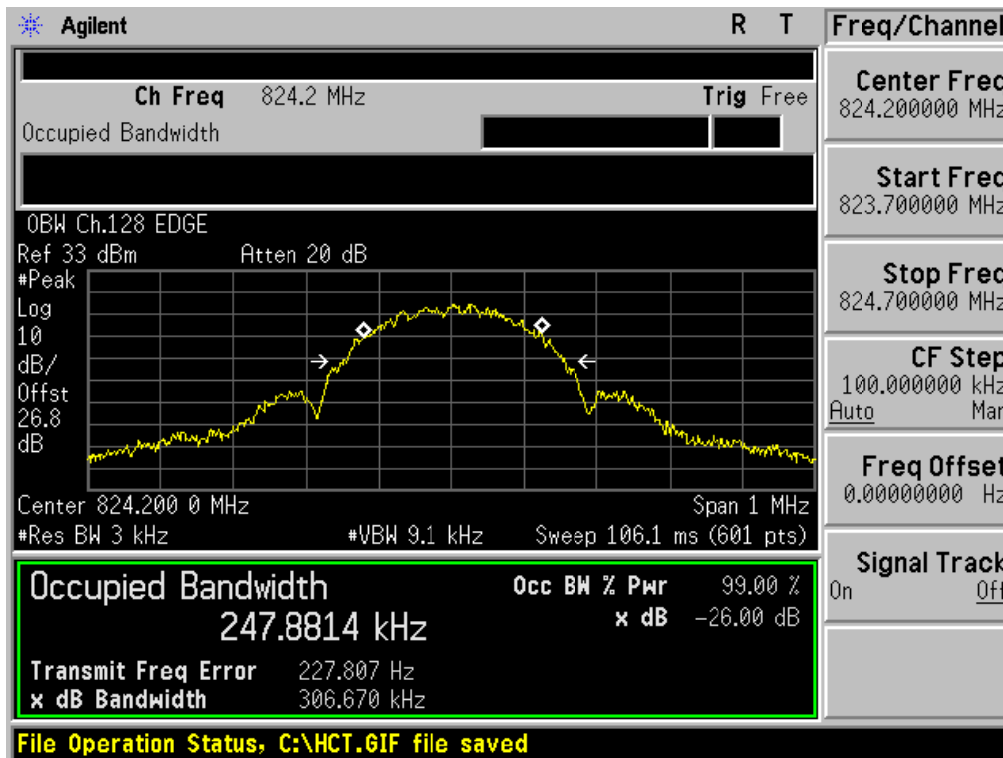


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

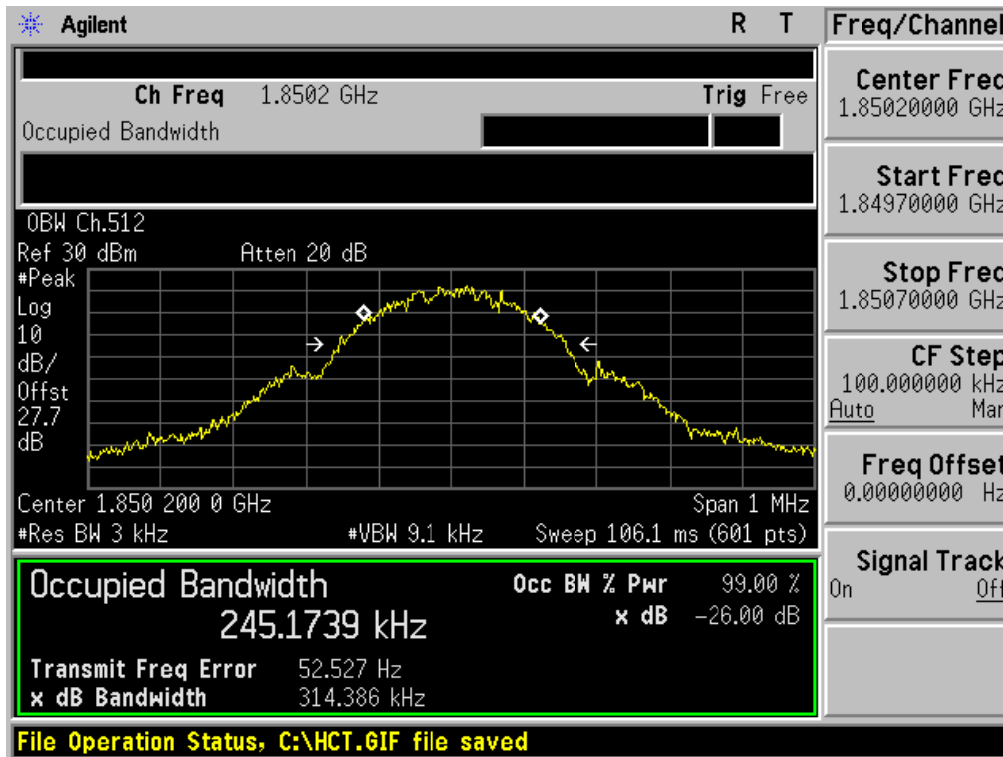


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

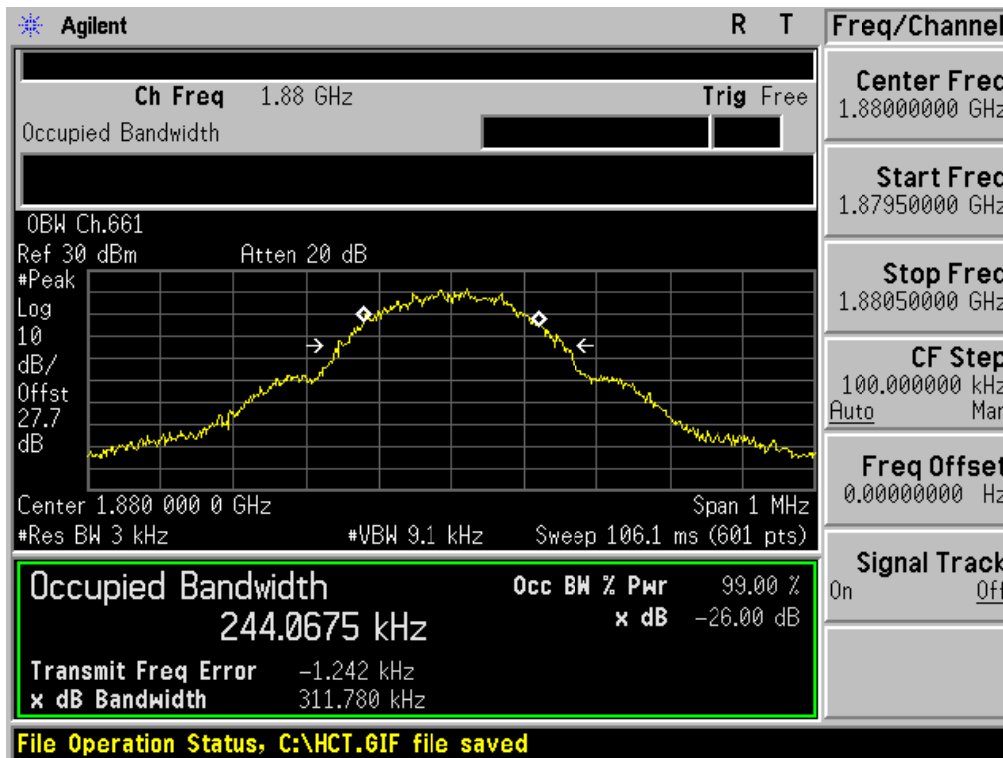


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

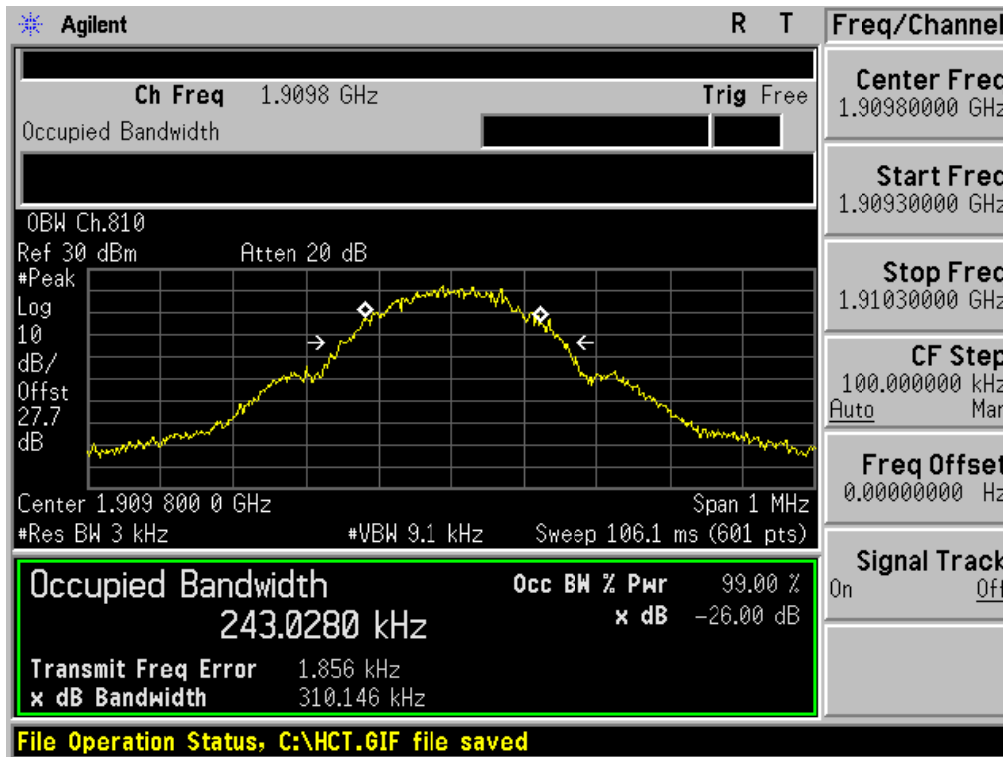


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

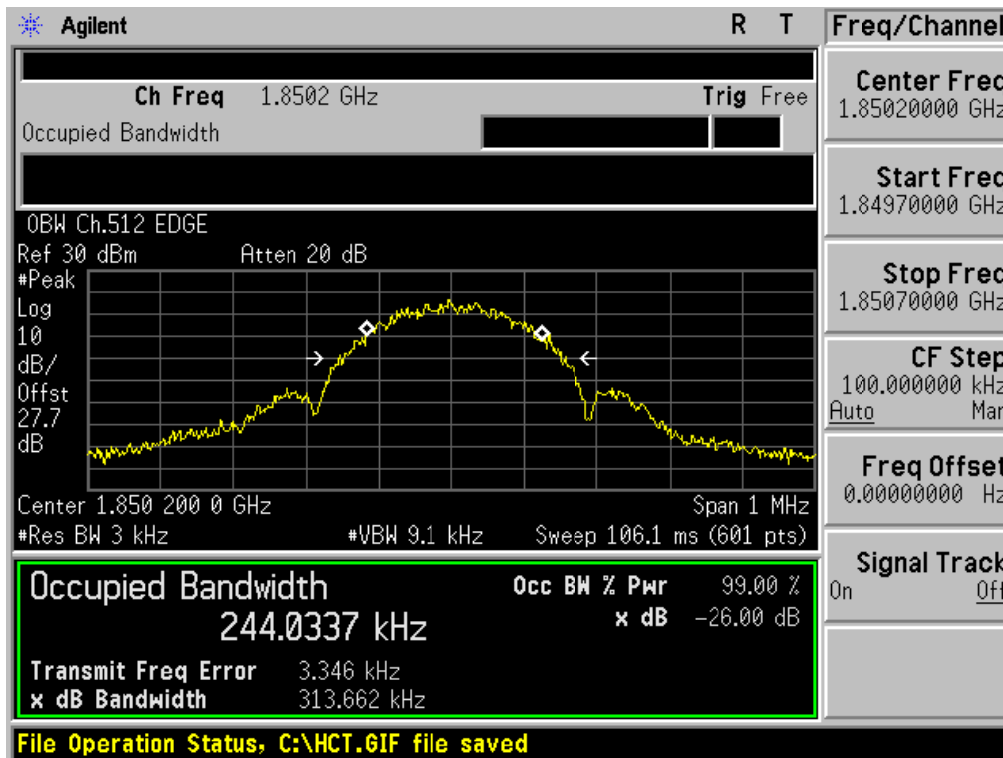


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Pk}

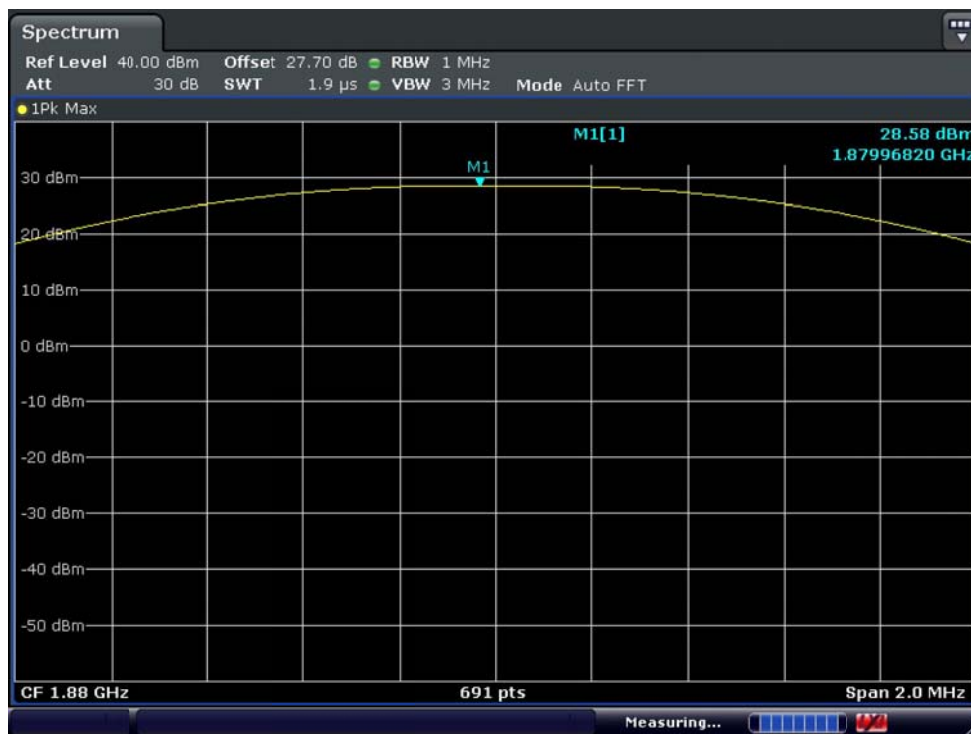


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

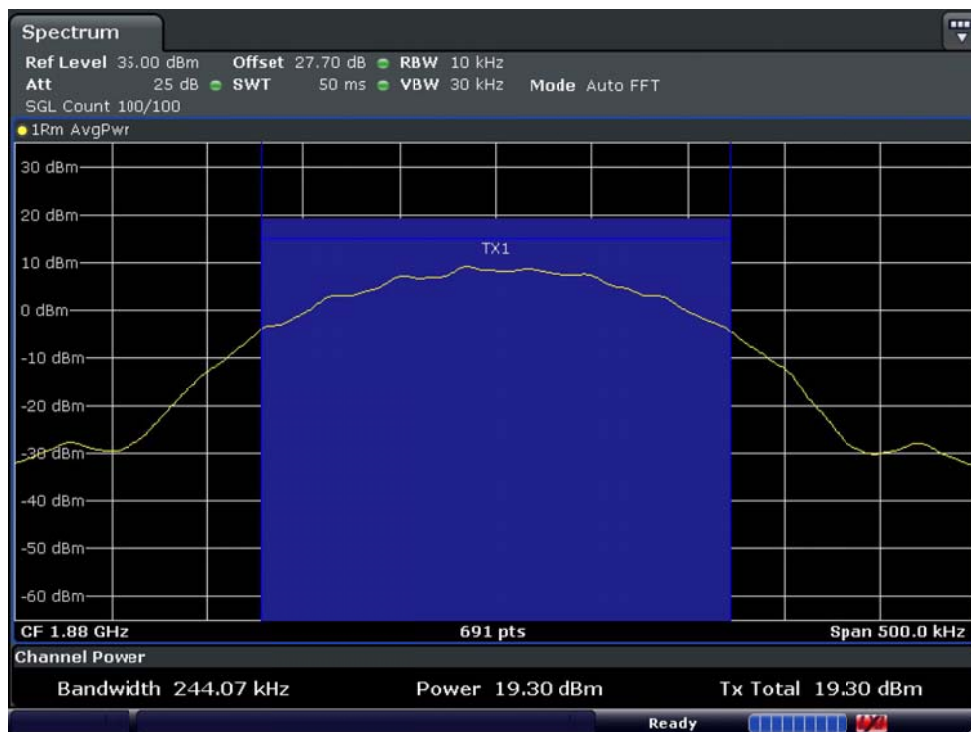


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

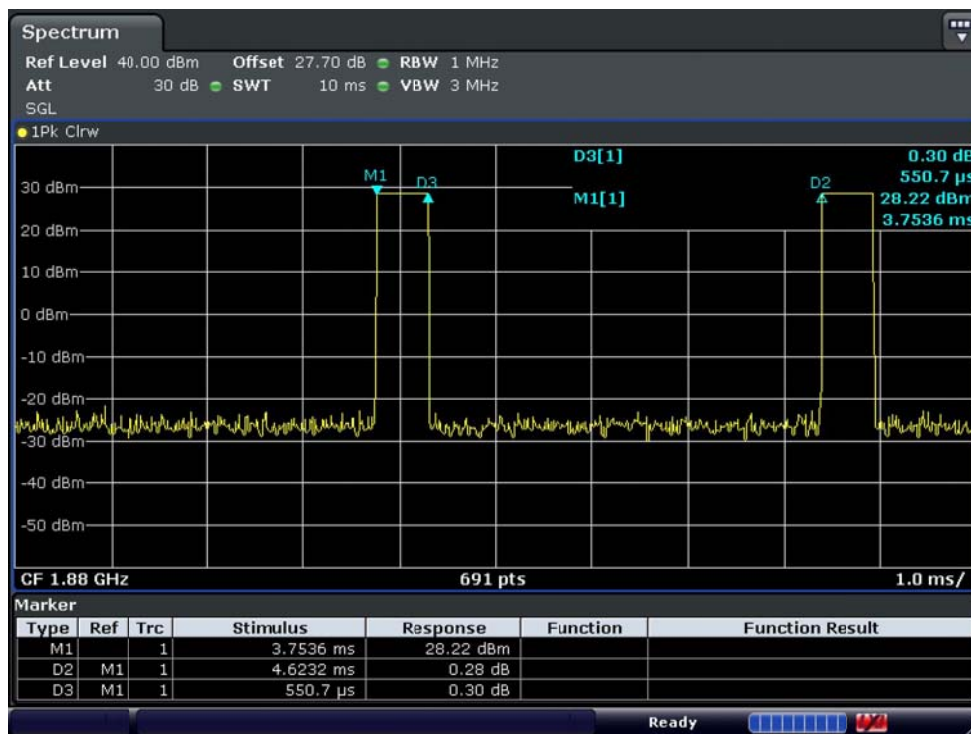


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Pk}

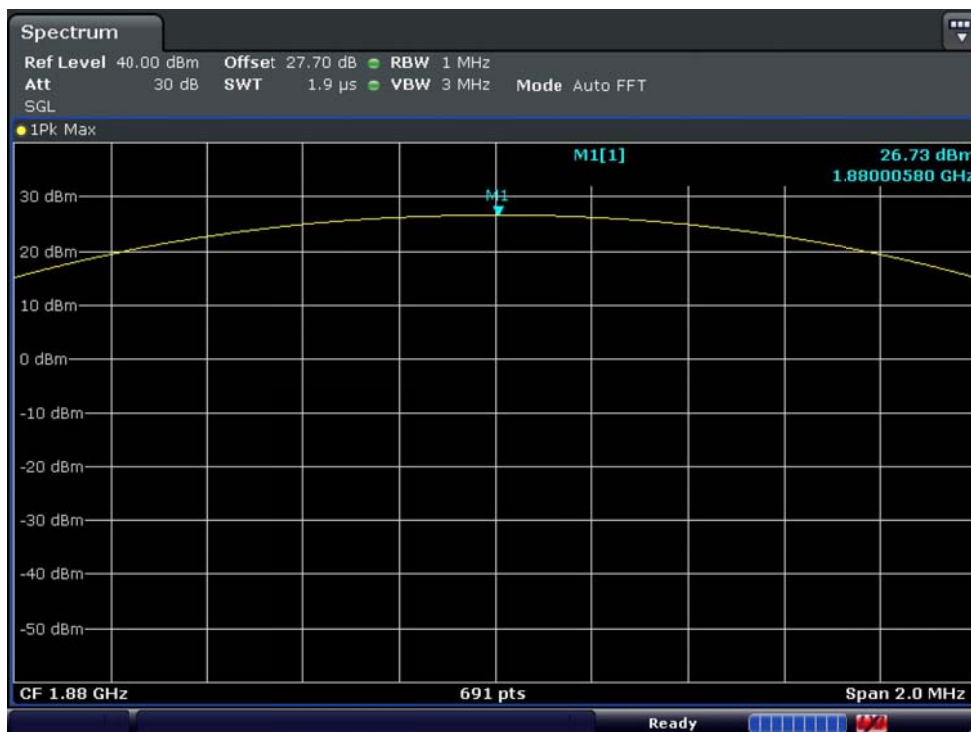


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

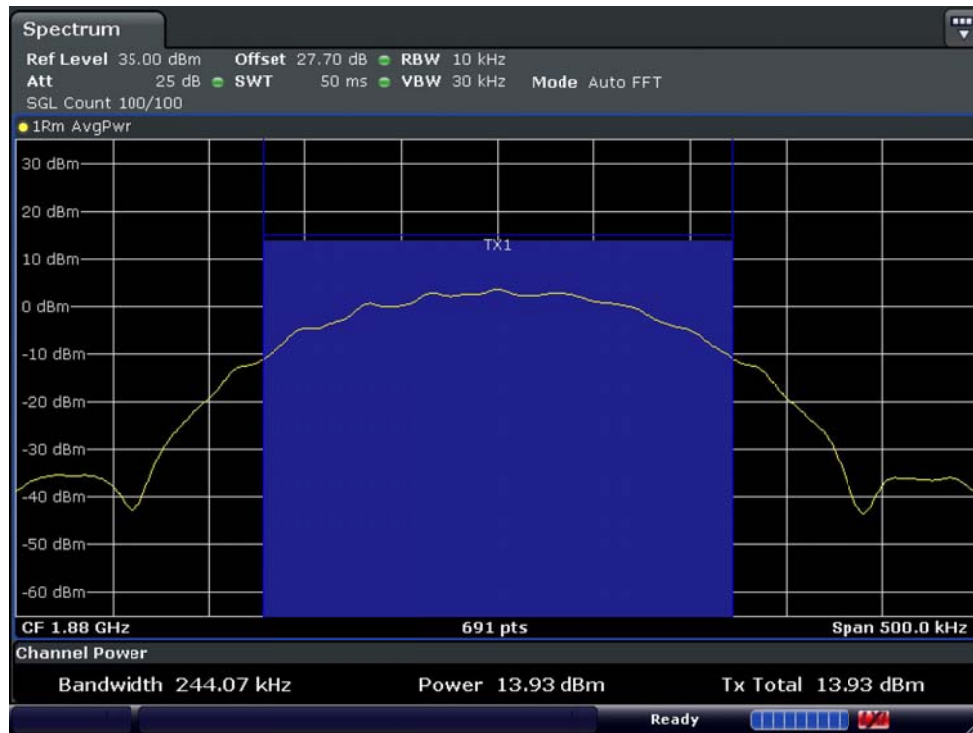


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

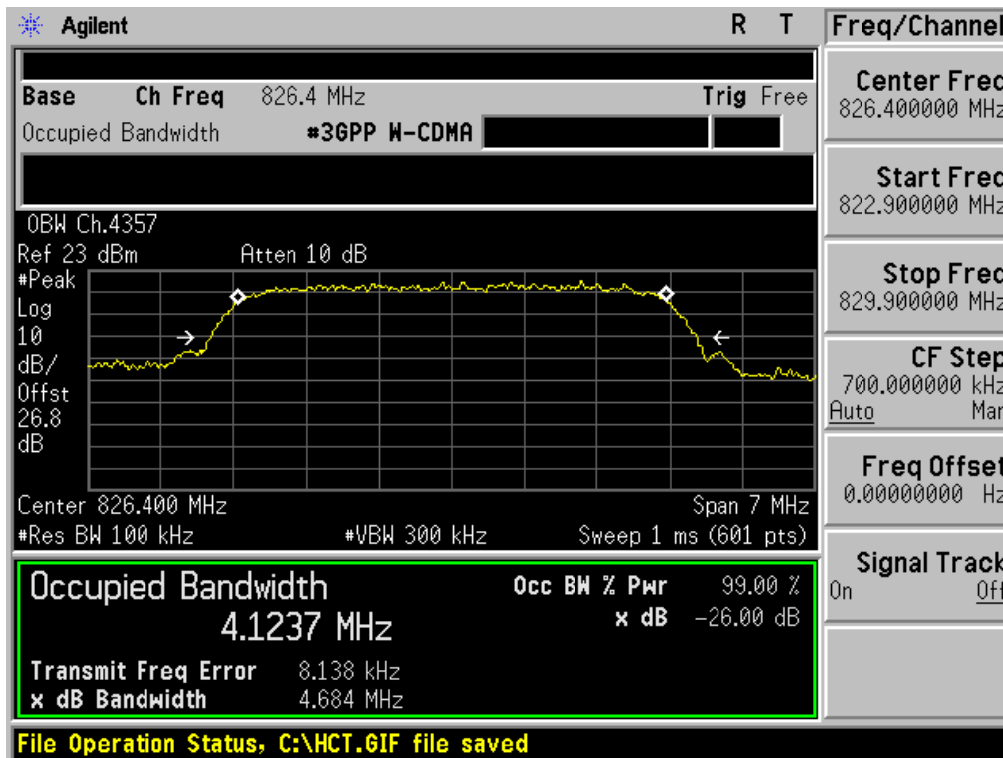


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

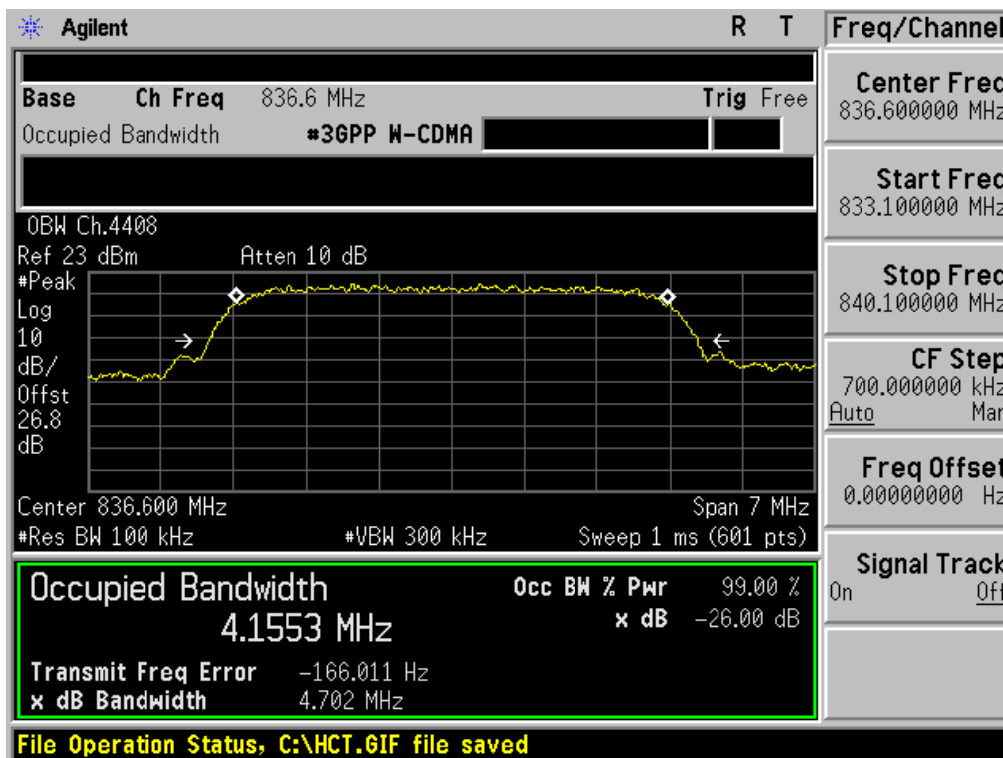


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

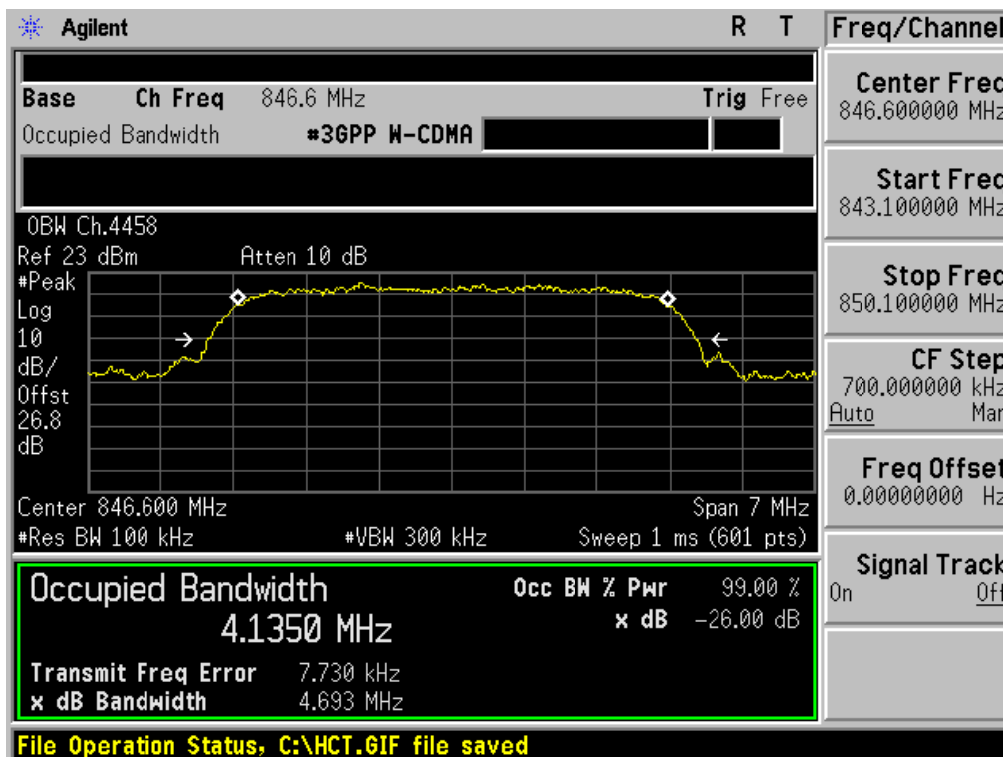


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

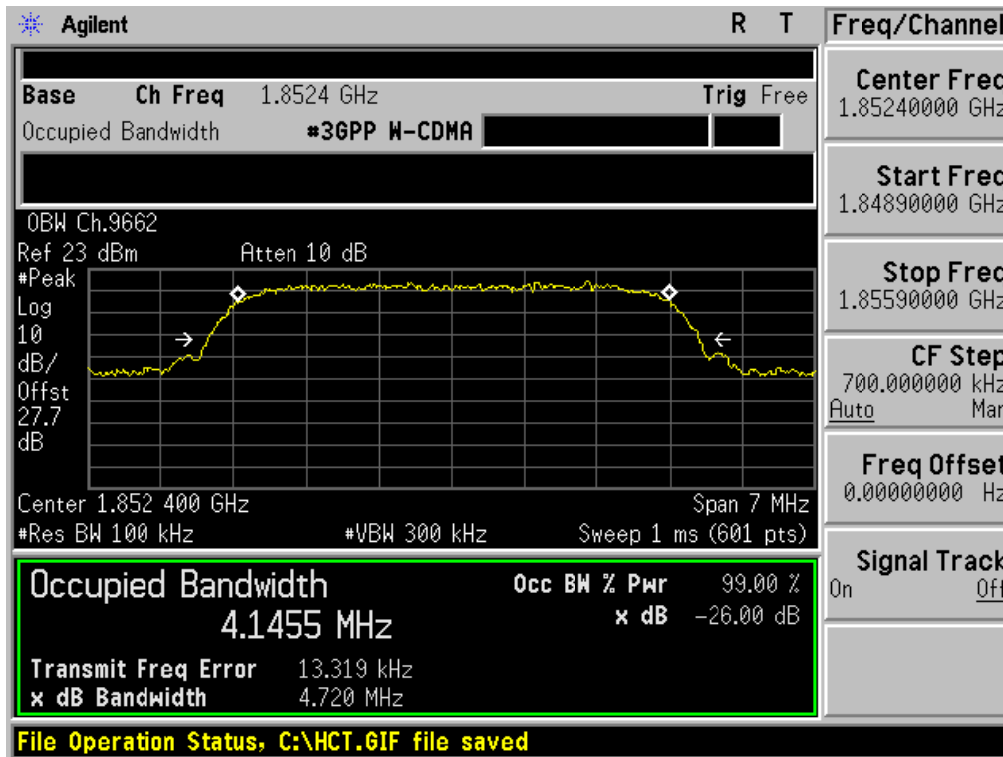


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

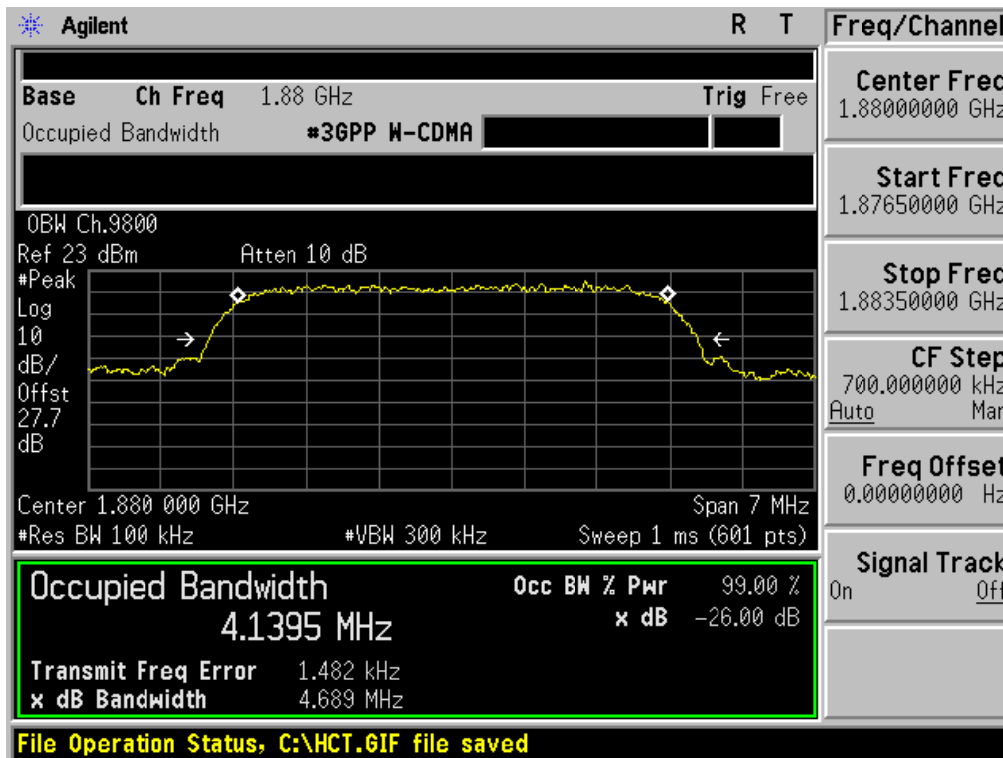


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

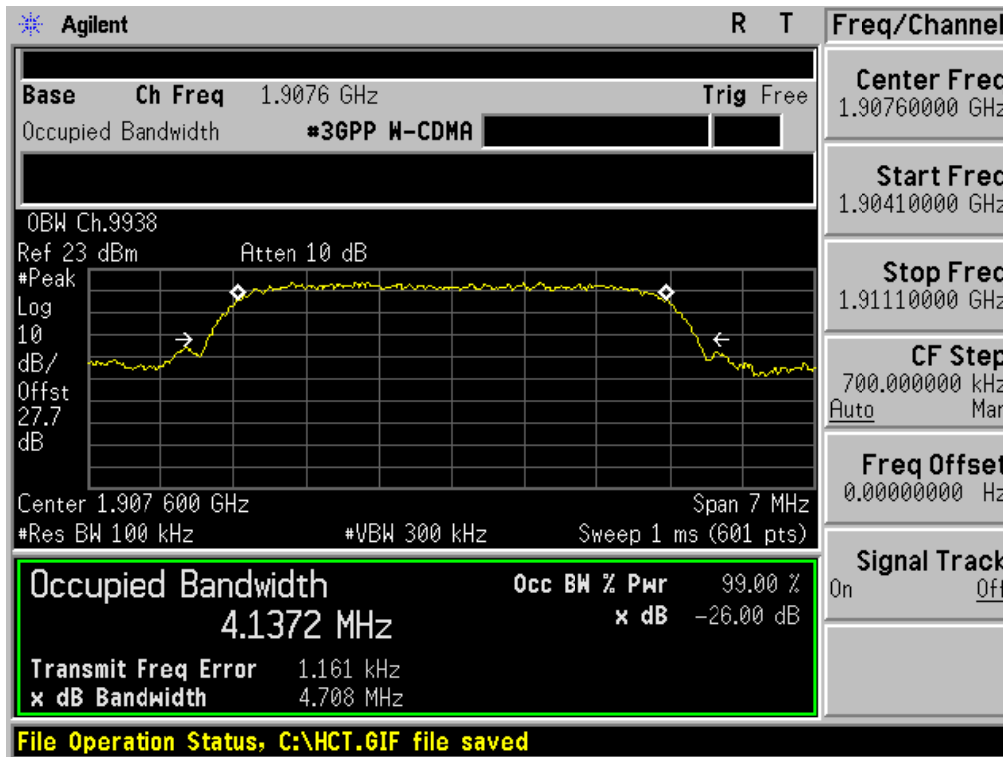


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

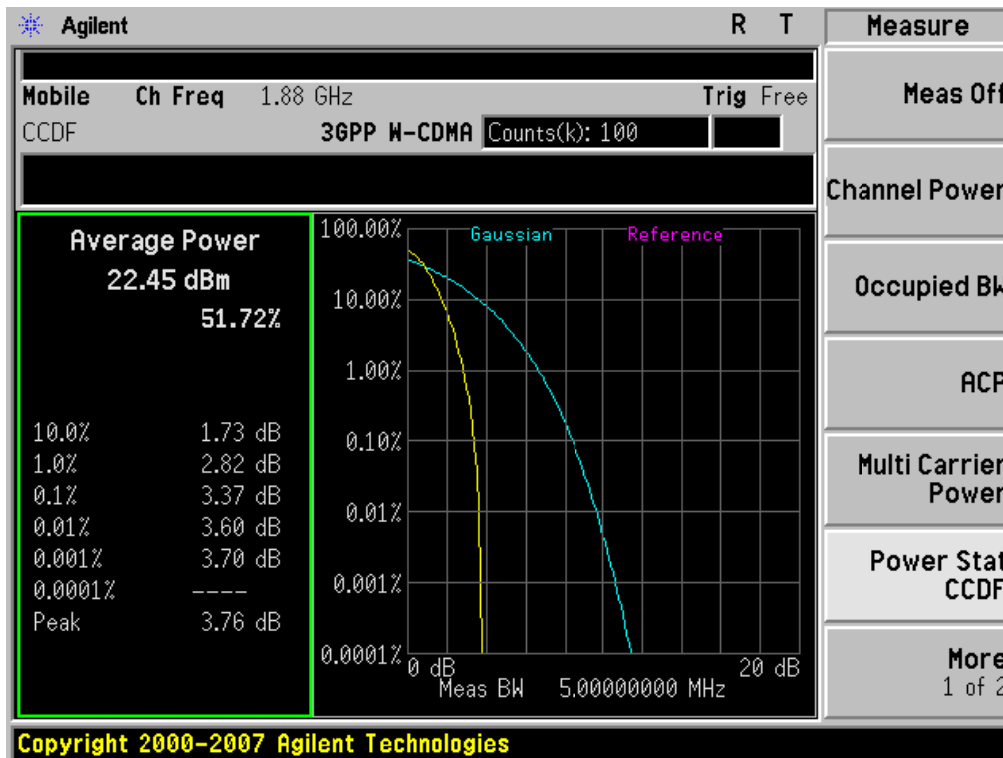


■ GSM850 MODE (128 CH.) Block Edge 1

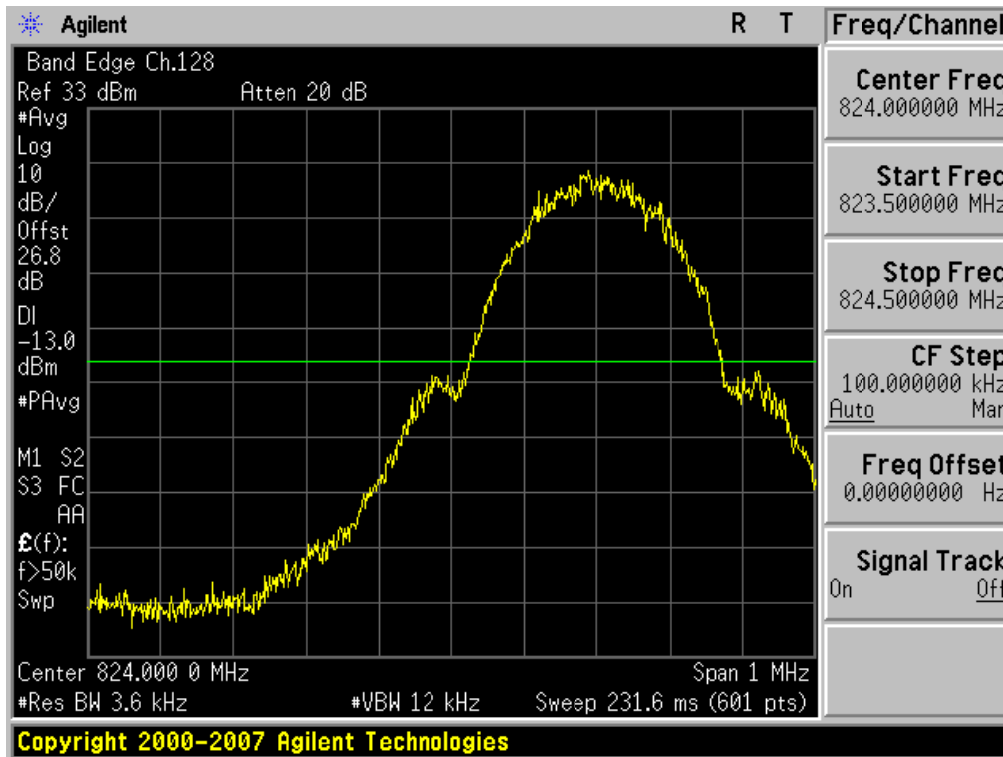


■ GSM850 MODE (128 CH.) Block Edge 2

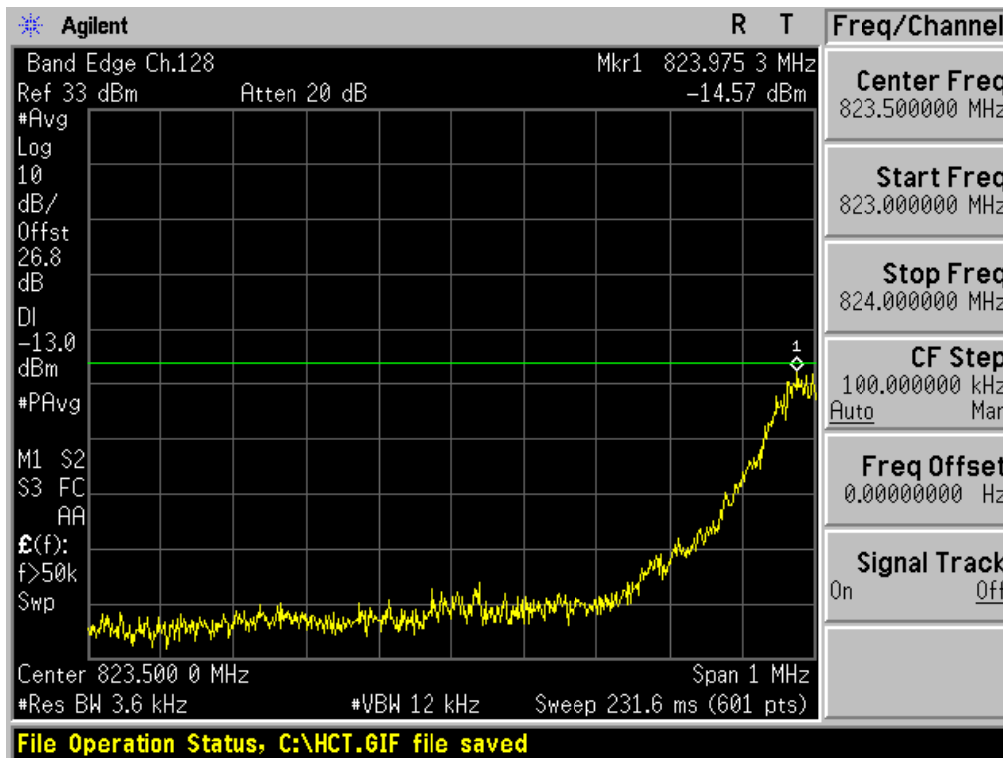


■ GSM850 MODE (128 CH.) Block Edge 3

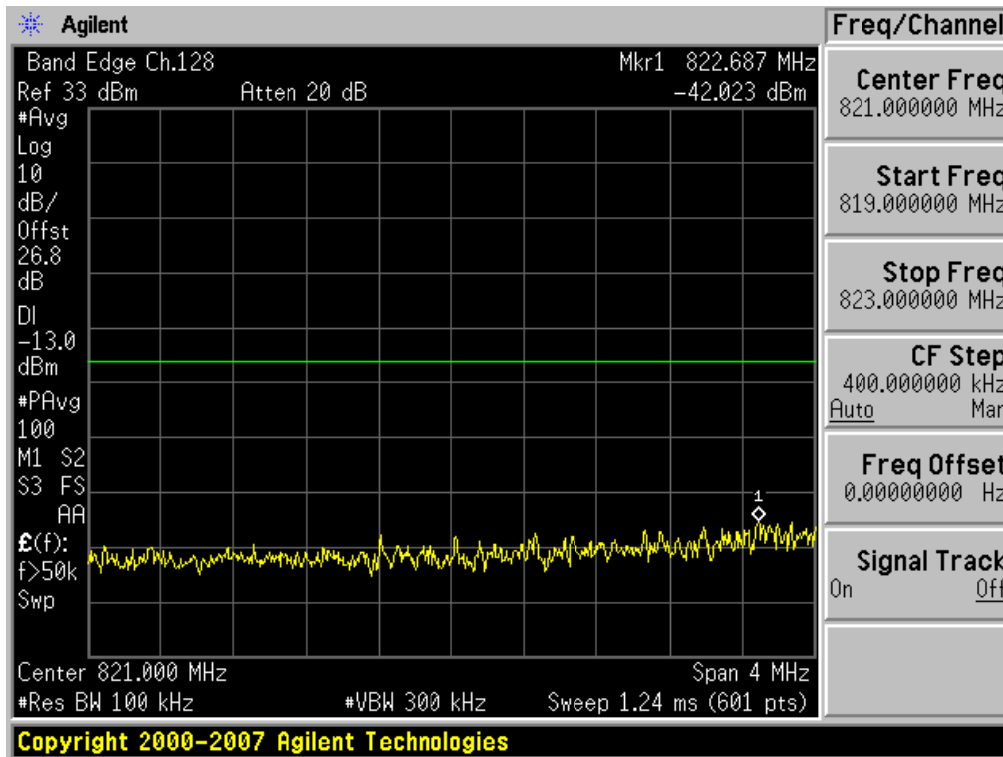


■ GSM850 MODE (251 CH.) Block Edge 1

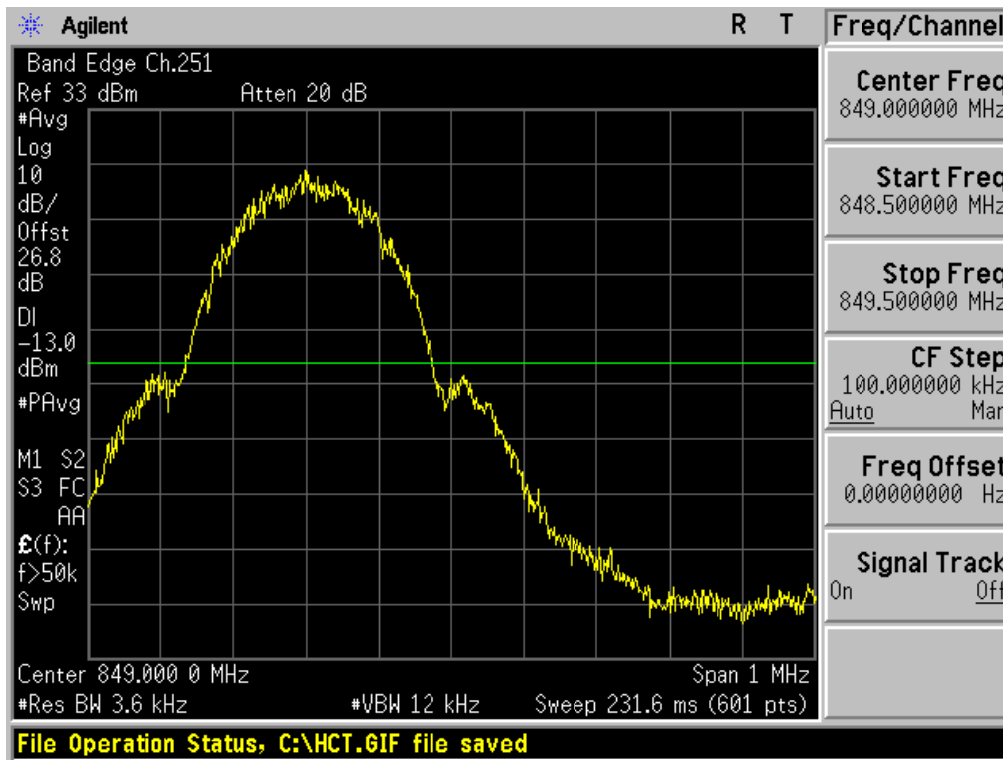


■ GSM850 MODE (251 CH.) Block Edge 2

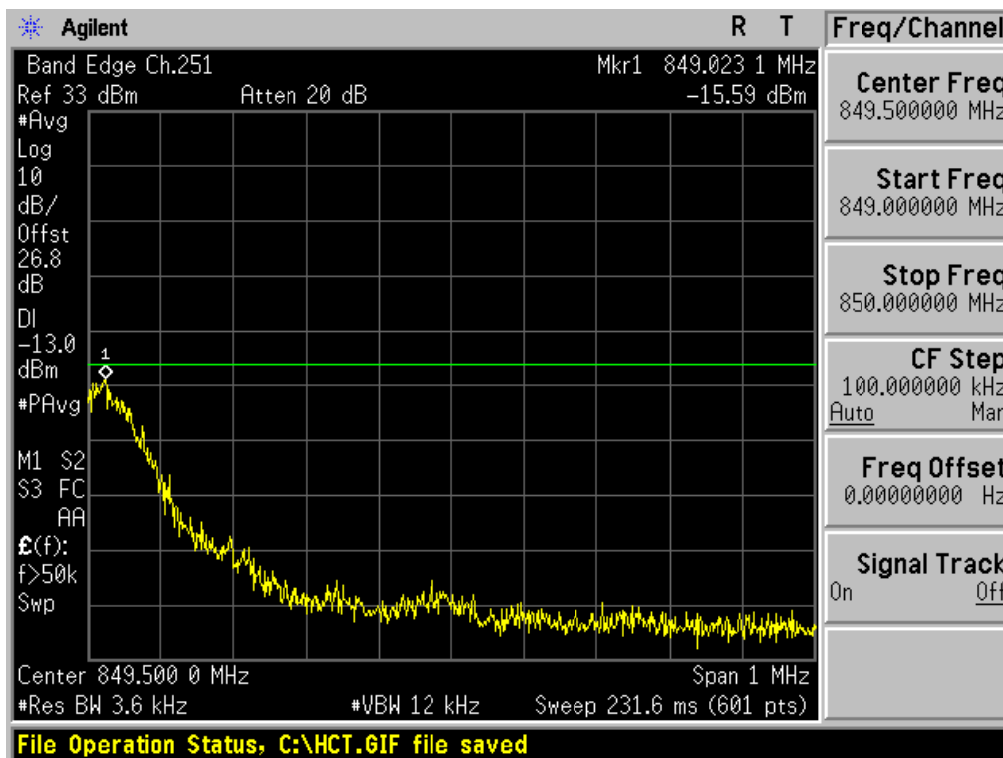


■ GSM850 MODE (251 CH.) Block Edge 3

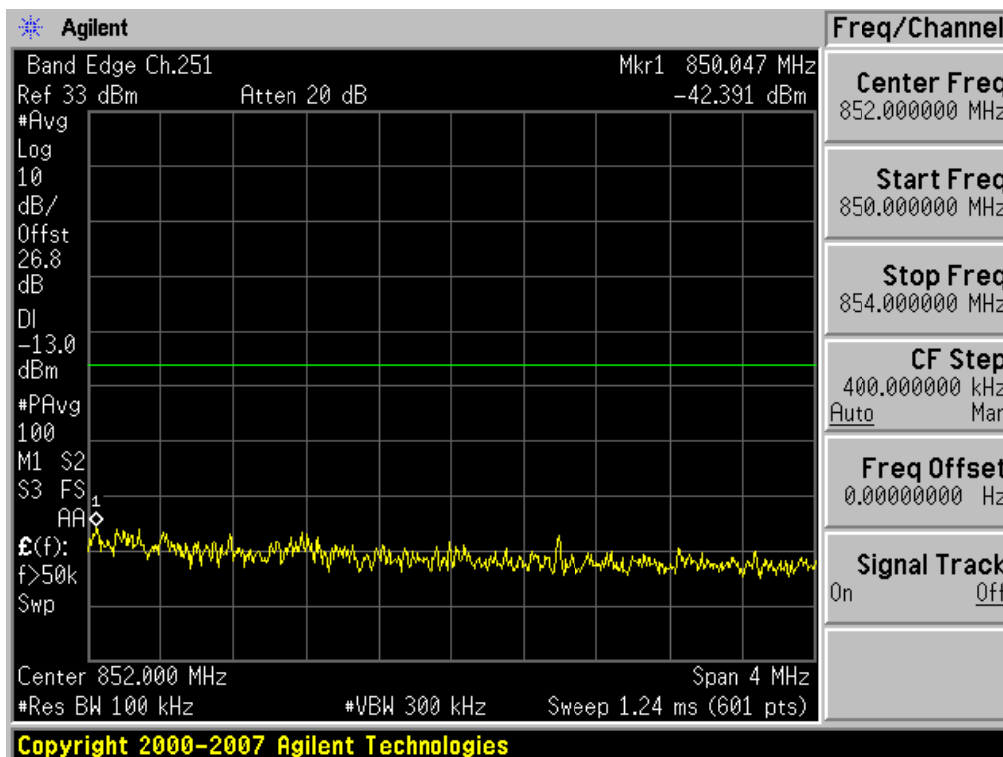


■ EDGE MODE (128 CH.) Block Edge 1

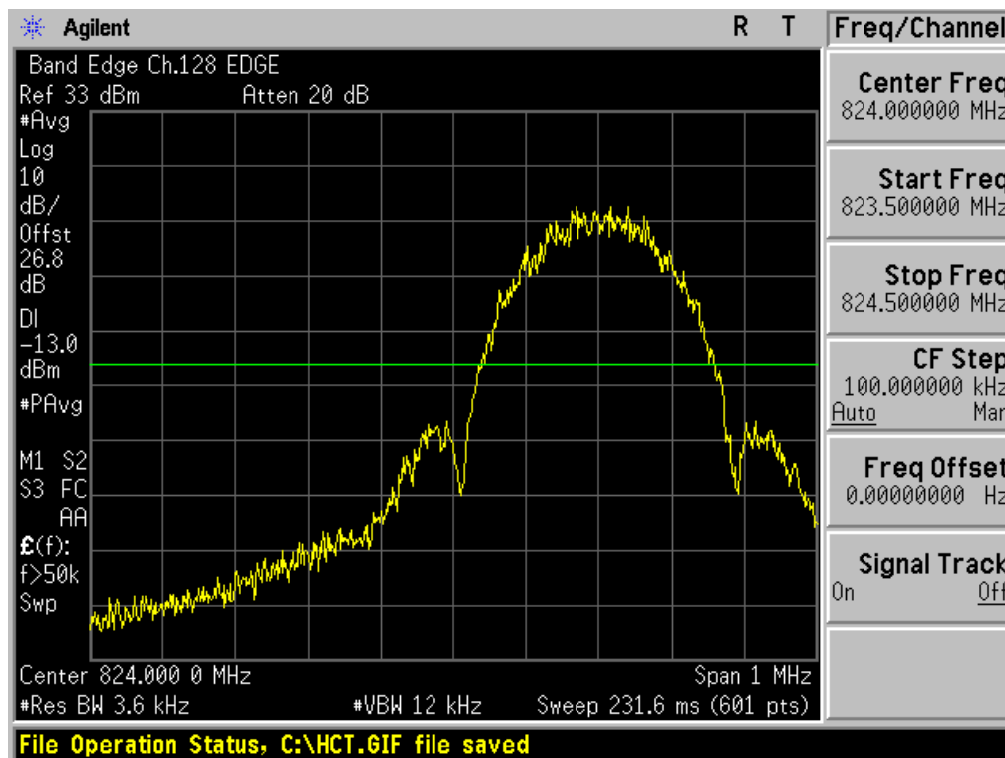


■ EDGE MODE (128 CH.) Block Edge 2

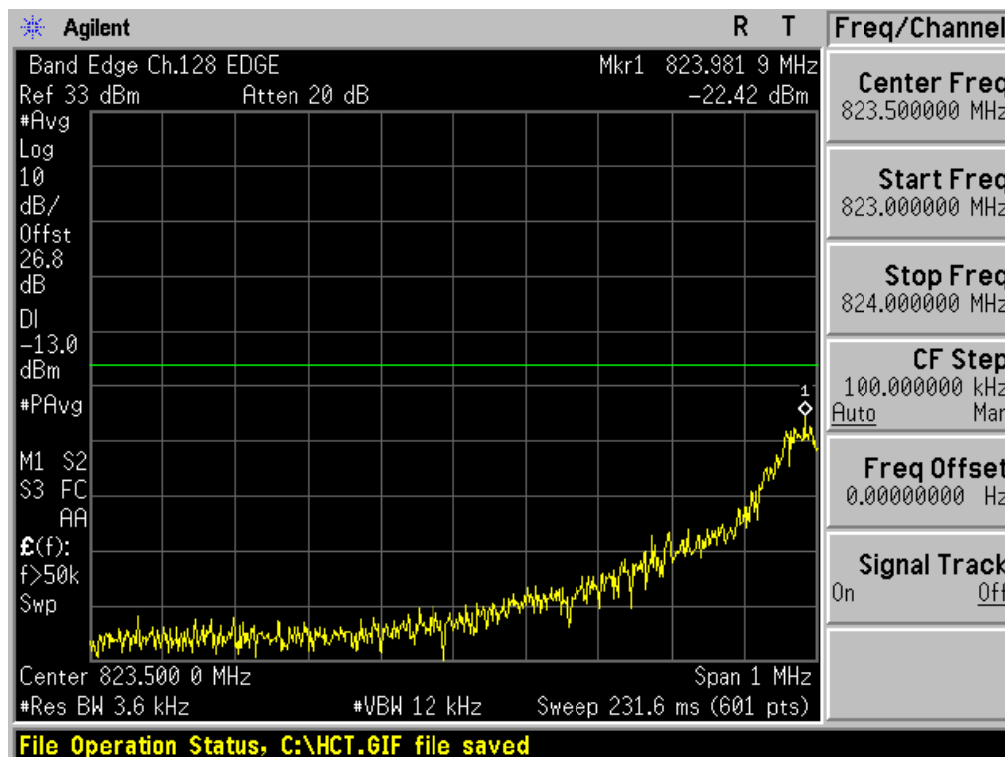


■ EDGE MODE (128 CH.) Block Edge 3

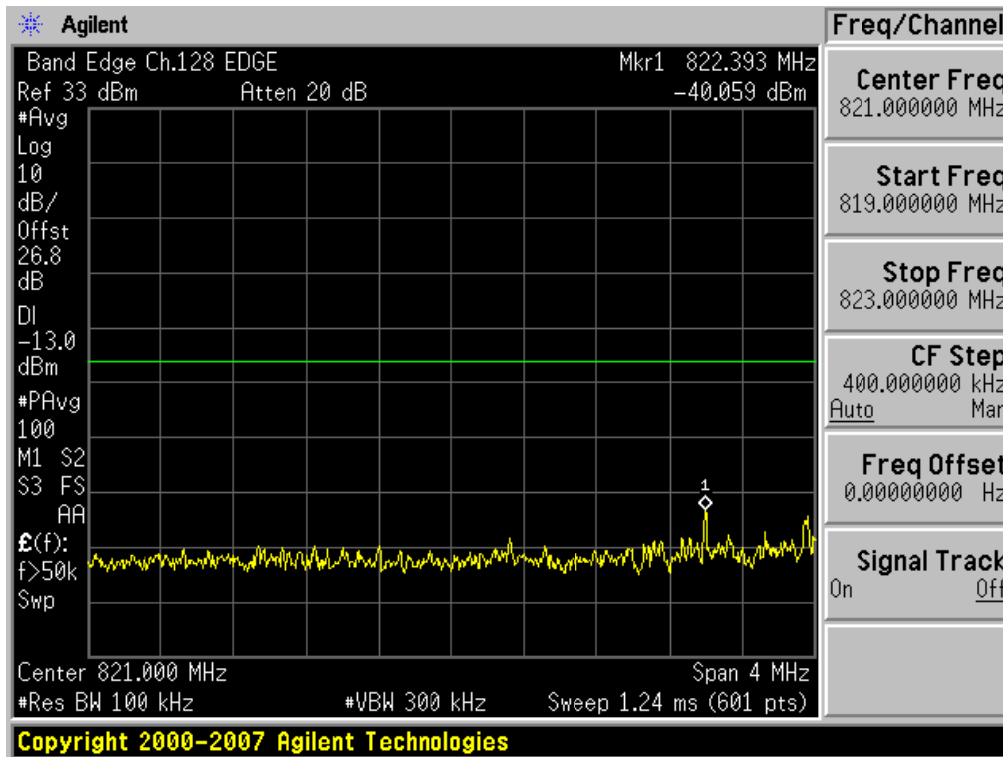


■ EDGE MODE (251 CH.) Block Edge 1

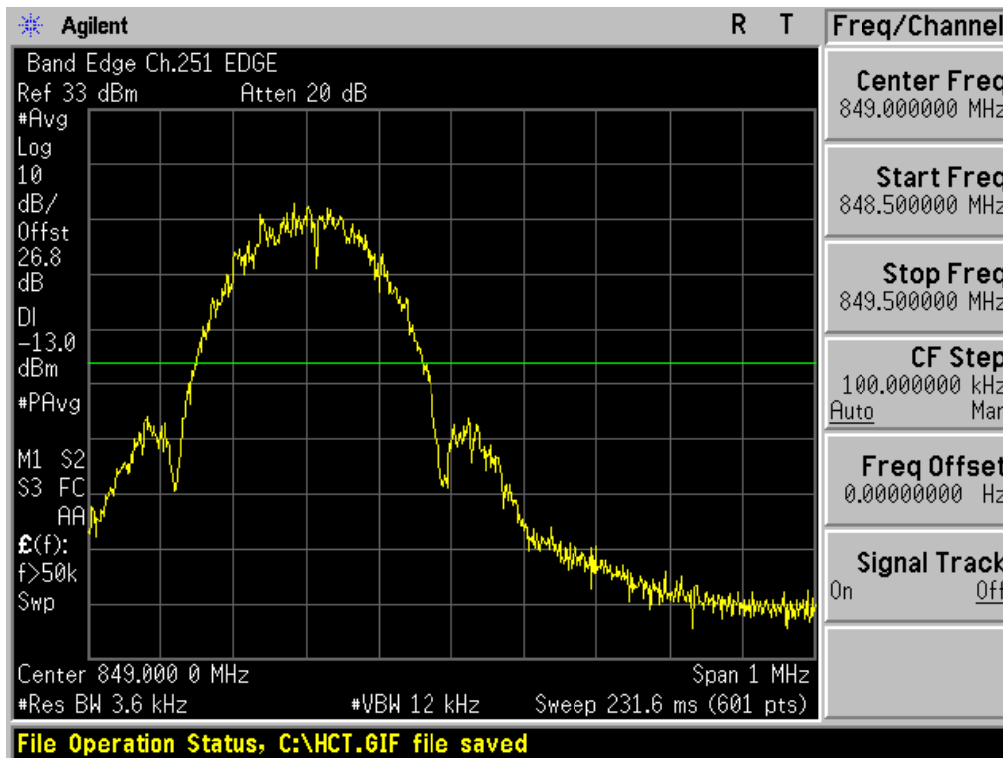


■ EDGE MODE (251 CH.) Block Edge 2

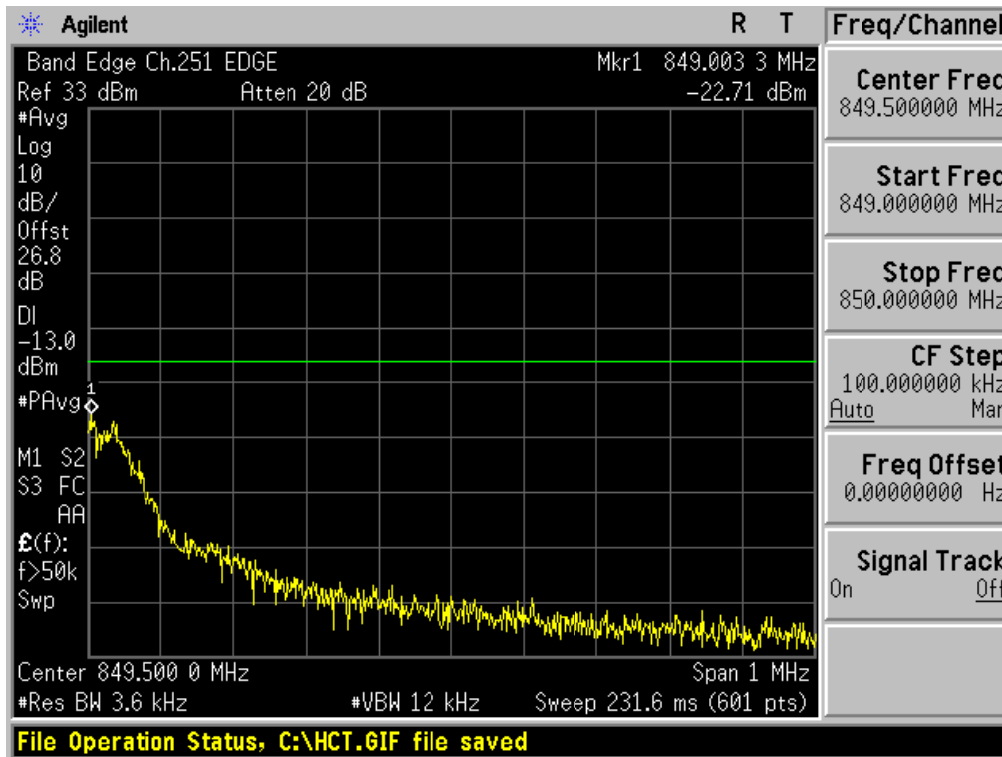


■ EDGE MODE (251 CH.) Block Edge 3

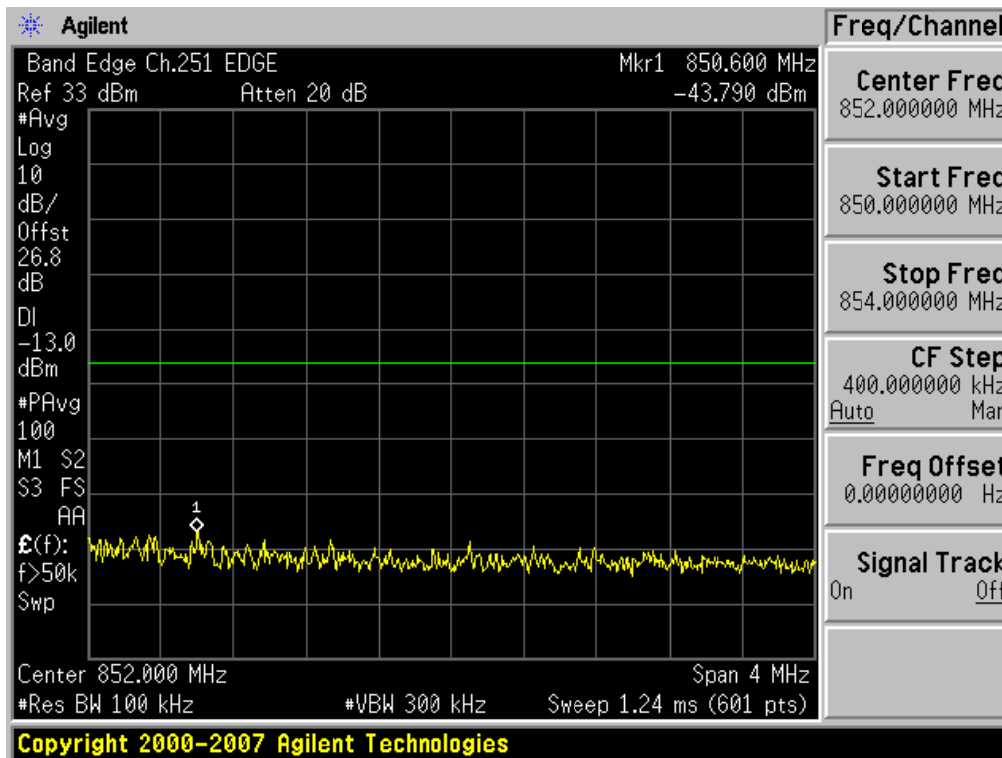


■ GSM1900 MODE (512 CH.) Block Edge 1

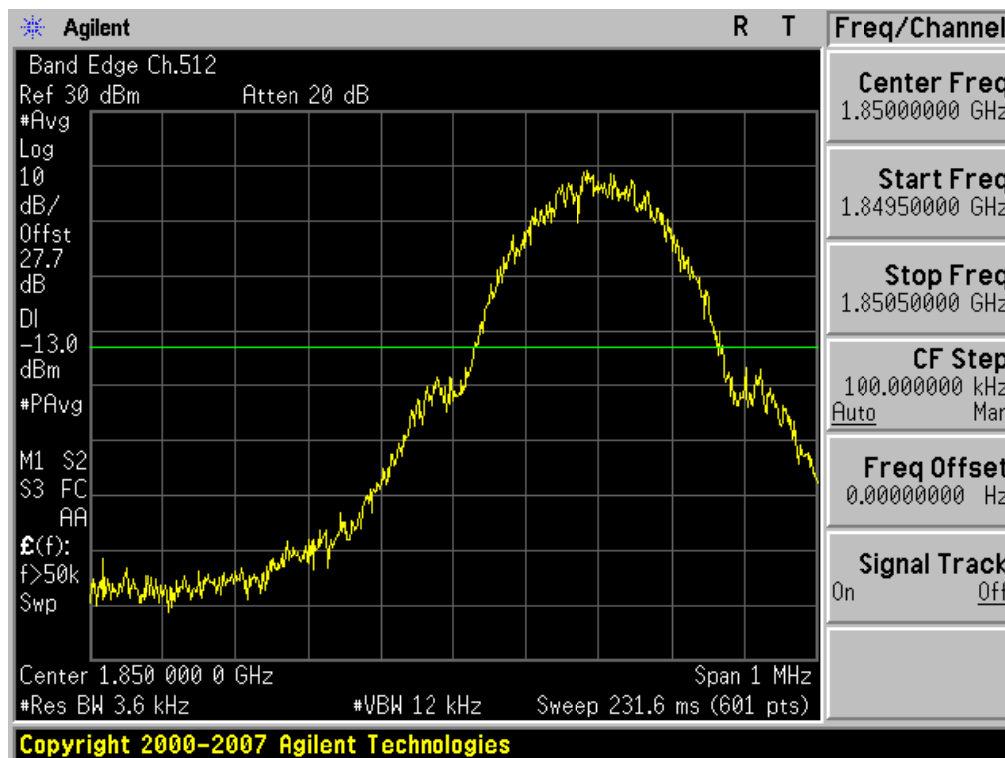

■ GSM1900 MODE (512 CH.) Block Edge 2

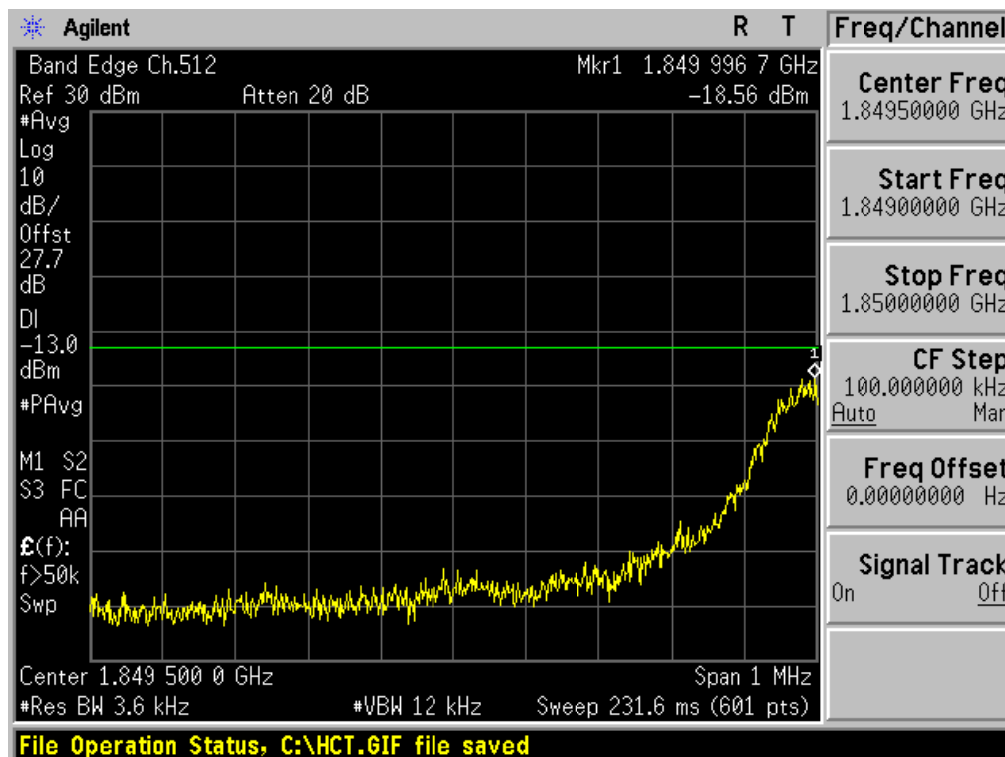


■ GSM1900 MODE (512 CH.) Block Edge 3

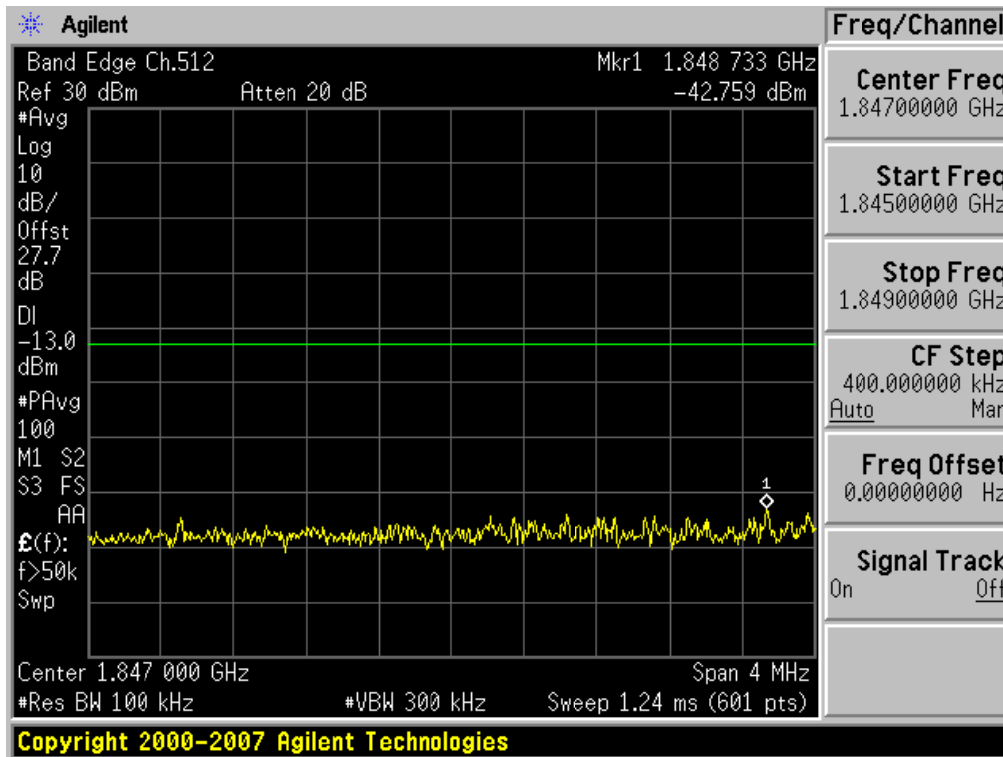


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -42.759 \text{ dBm} + 10 \text{ dB} = -32.759 \text{ dBm}$


■ GSM1900 MODE (810 CH.) Block Edge 1

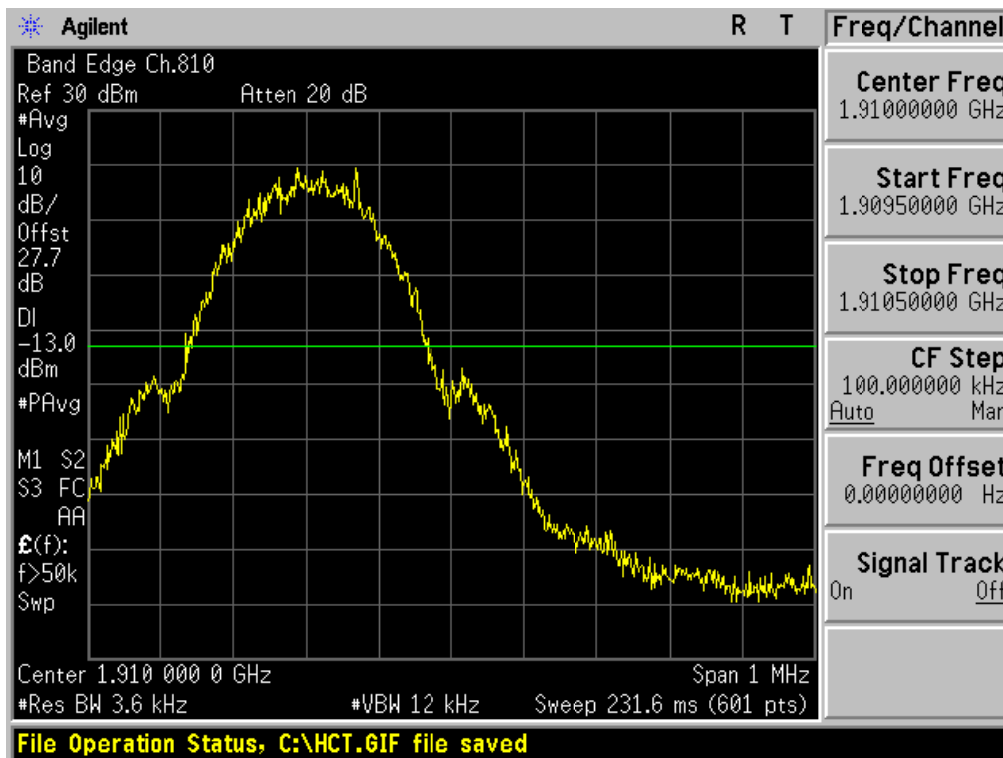

■ GSM1900 MODE (810 CH.) Block Edge 2

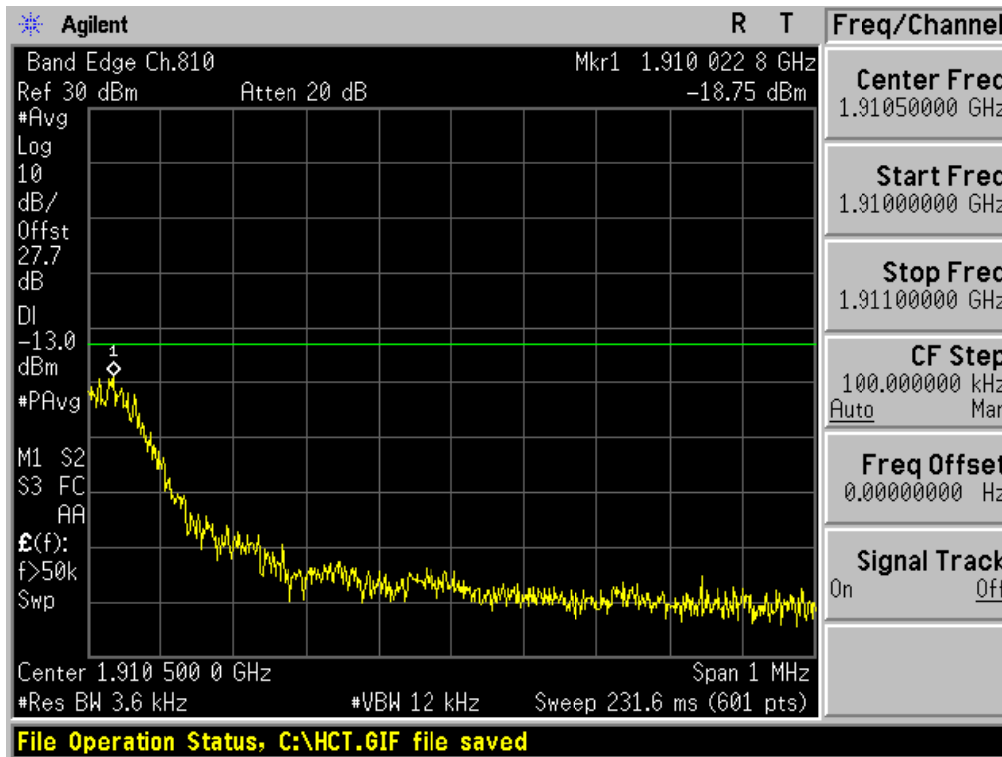


■ GSM1900 MODE (810 CH.) Block Edge 3

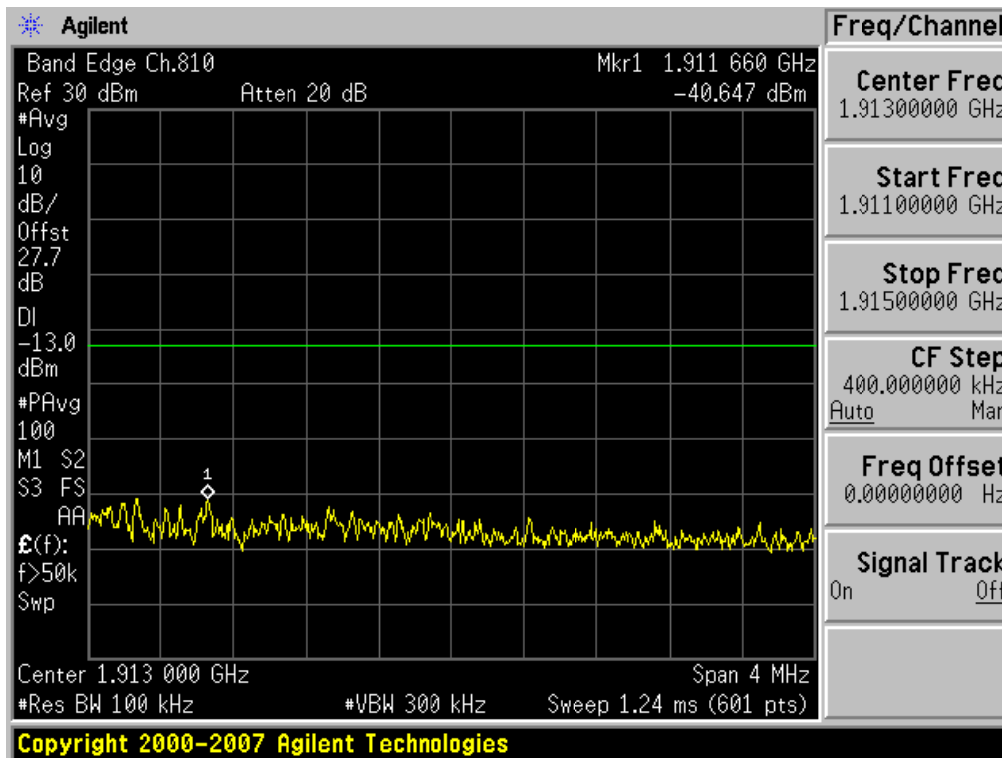


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -40.647 dBm + 10 dB = **-30.647 dBm**


■ EDGE MODE (512 CH.) Block Edge 1

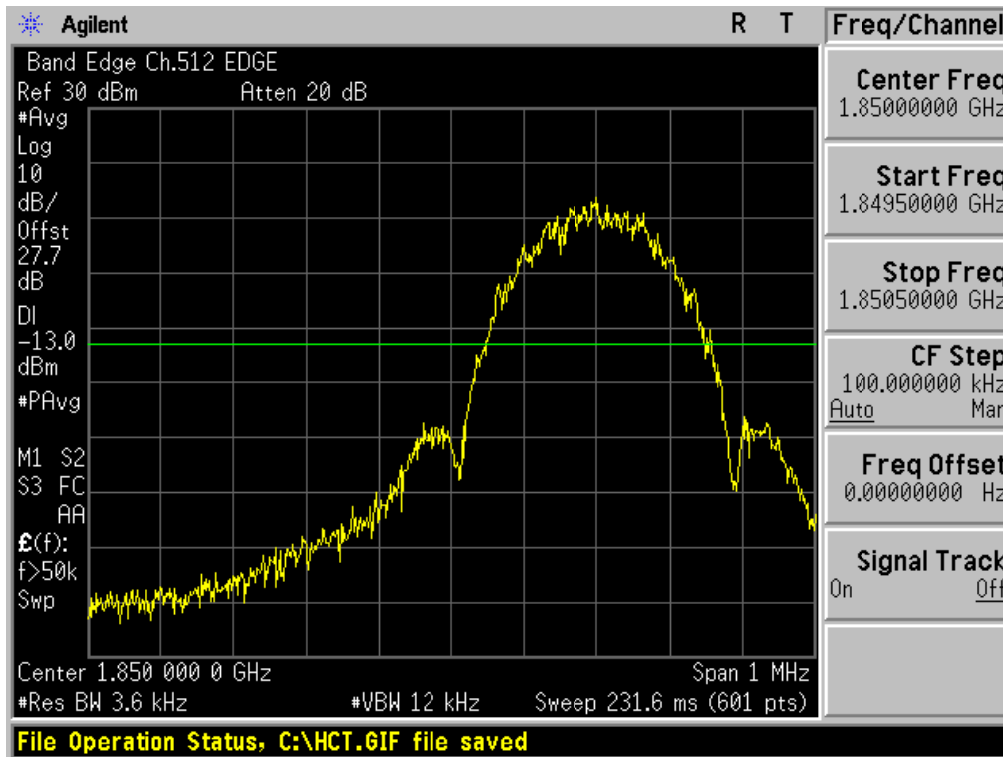

■ EDGE MODE (512 CH.) Block Edge 2

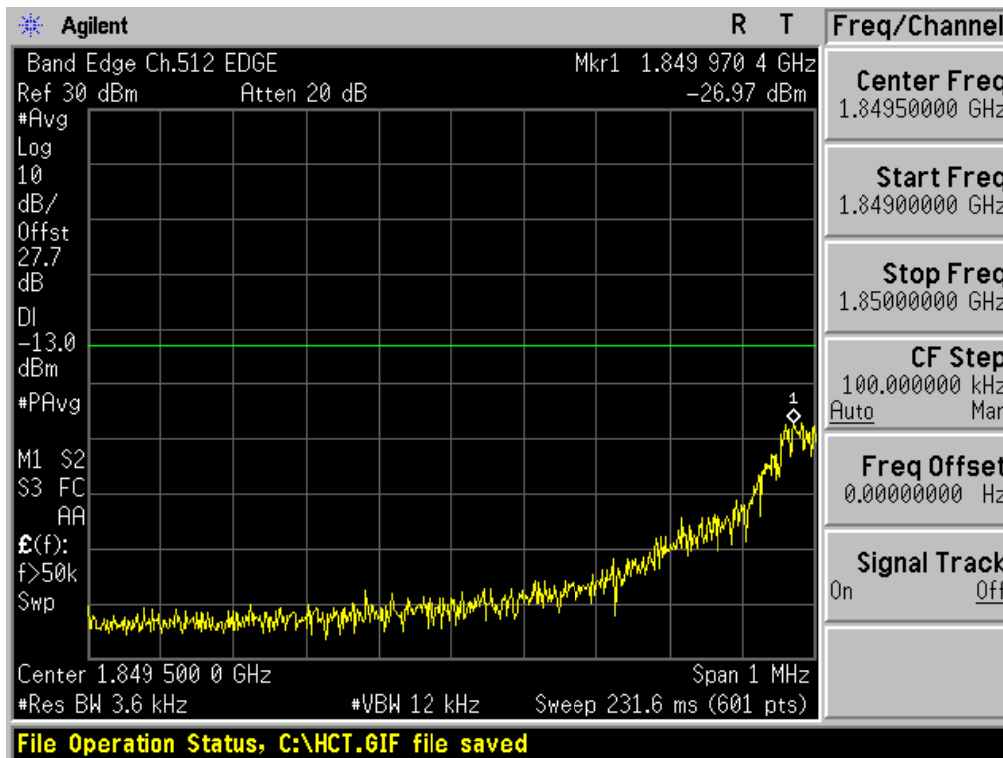


■ EDGE MODE (512 CH.) Block Edge 3

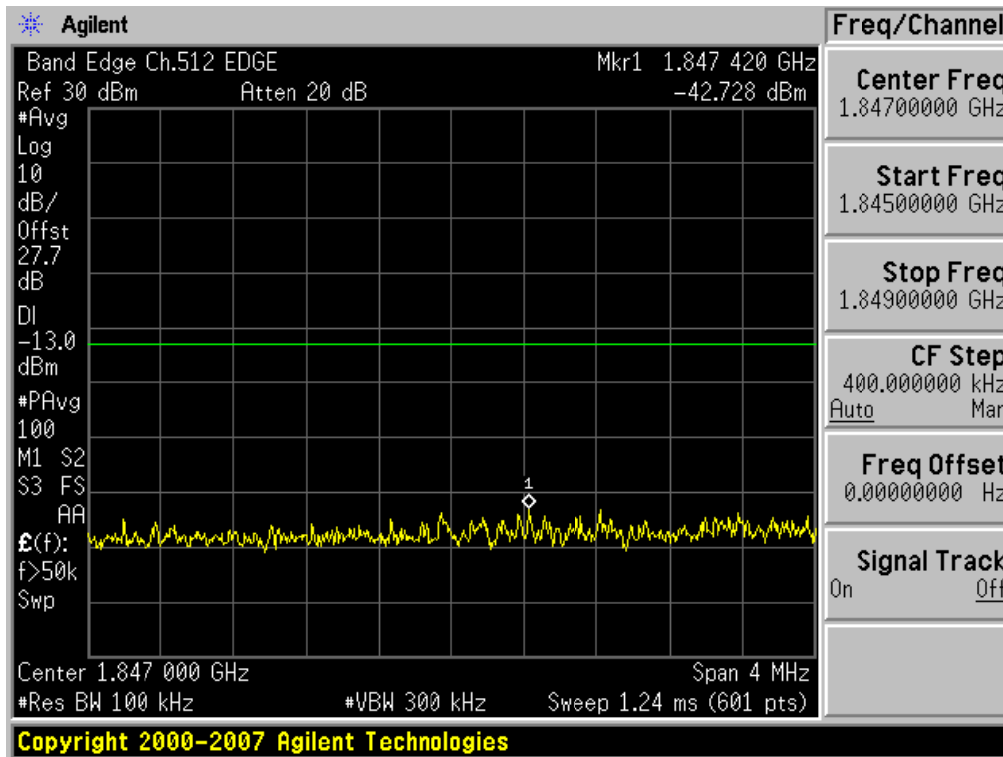


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -42.728 \text{ dBm} + 10 \text{ dB} = -32.728 \text{ dBm}$


■ EDGE MODE (810 CH.) Block Edge 1

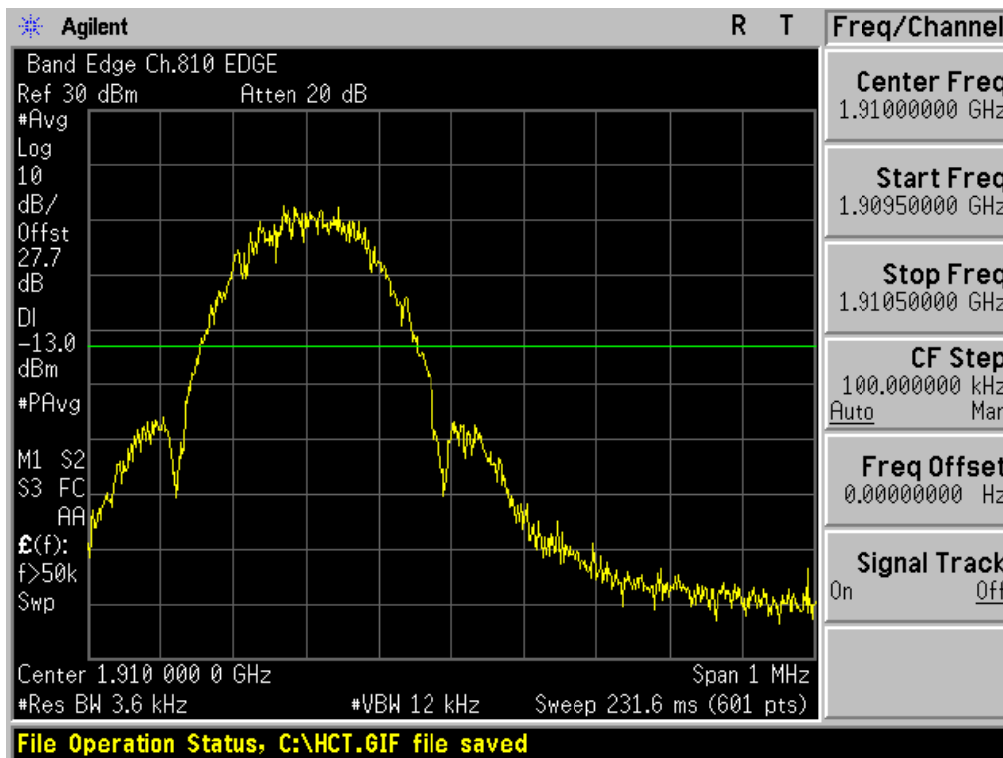

■ EDGE MODE (810 CH.) Block Edge 2

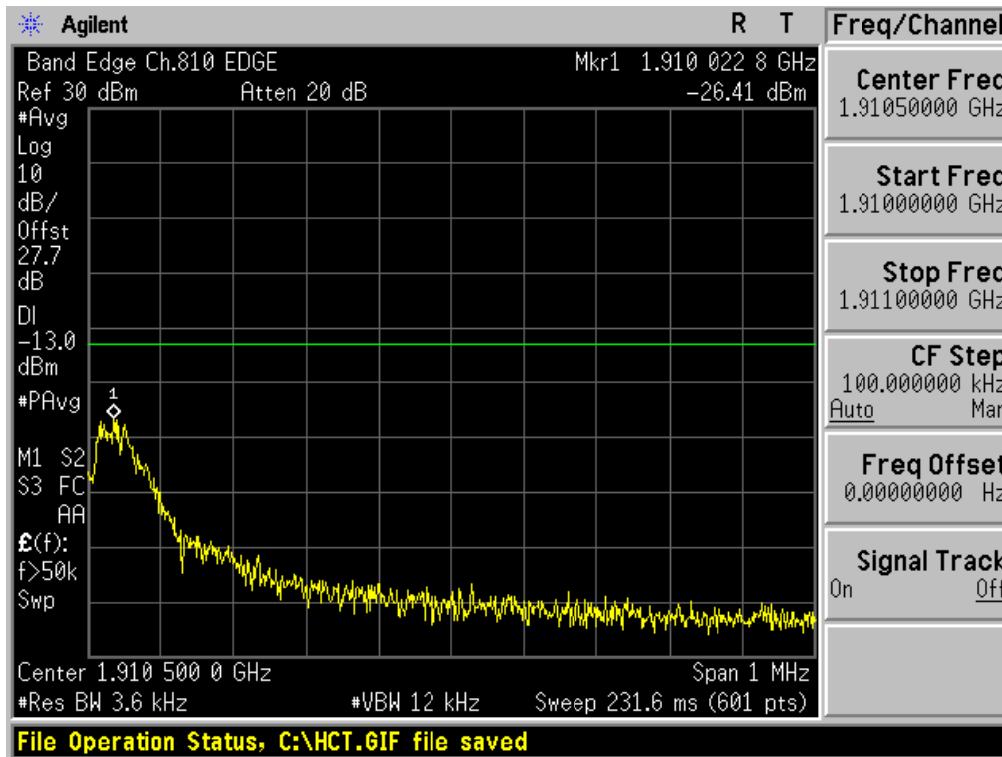


■ EDGE MODE (810 CH.) Block Edge 3

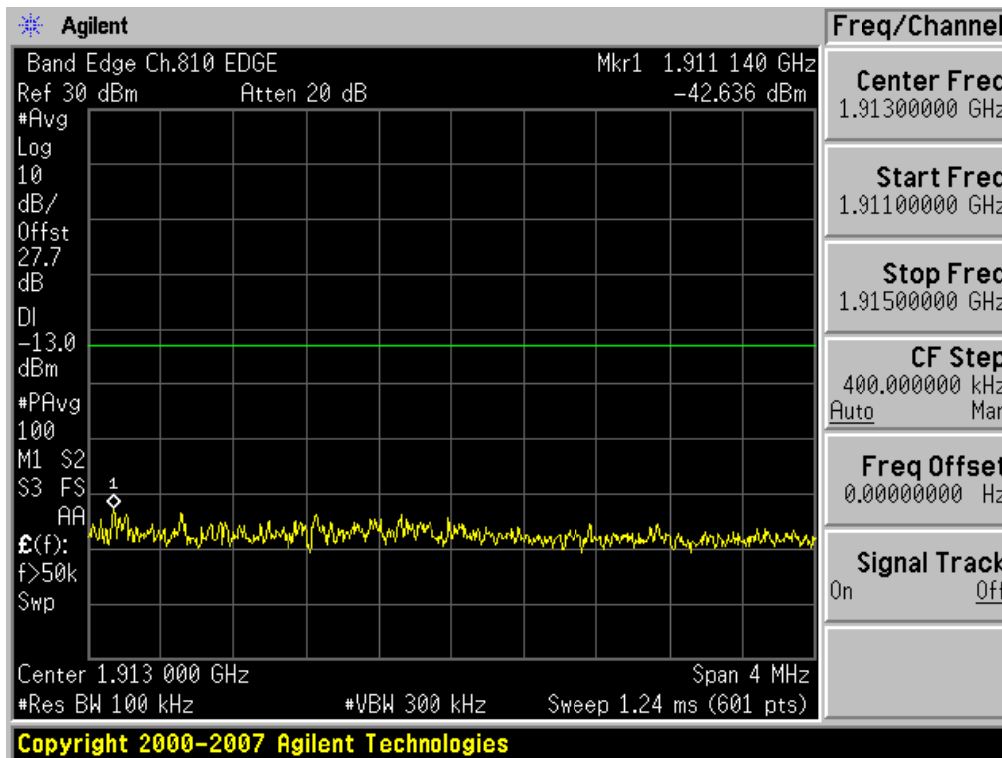


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -42.636 dBm + 10 dB = **-32.636 dBm**


■ WCDMA850 MODE (4132 CH.) Block Edge

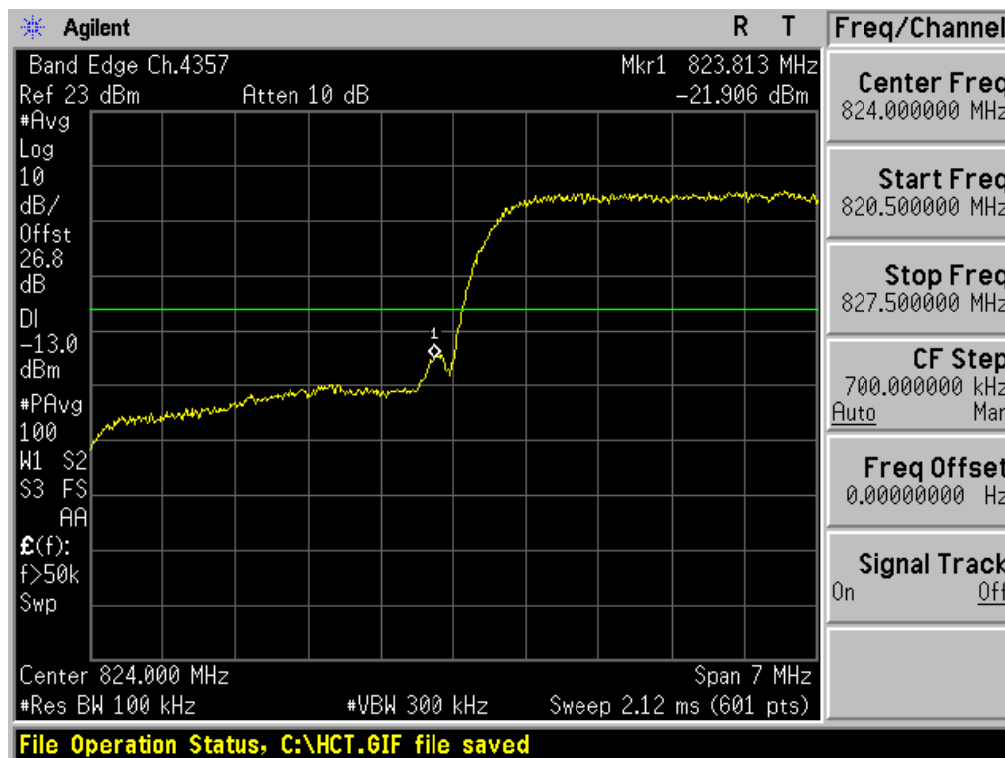


■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

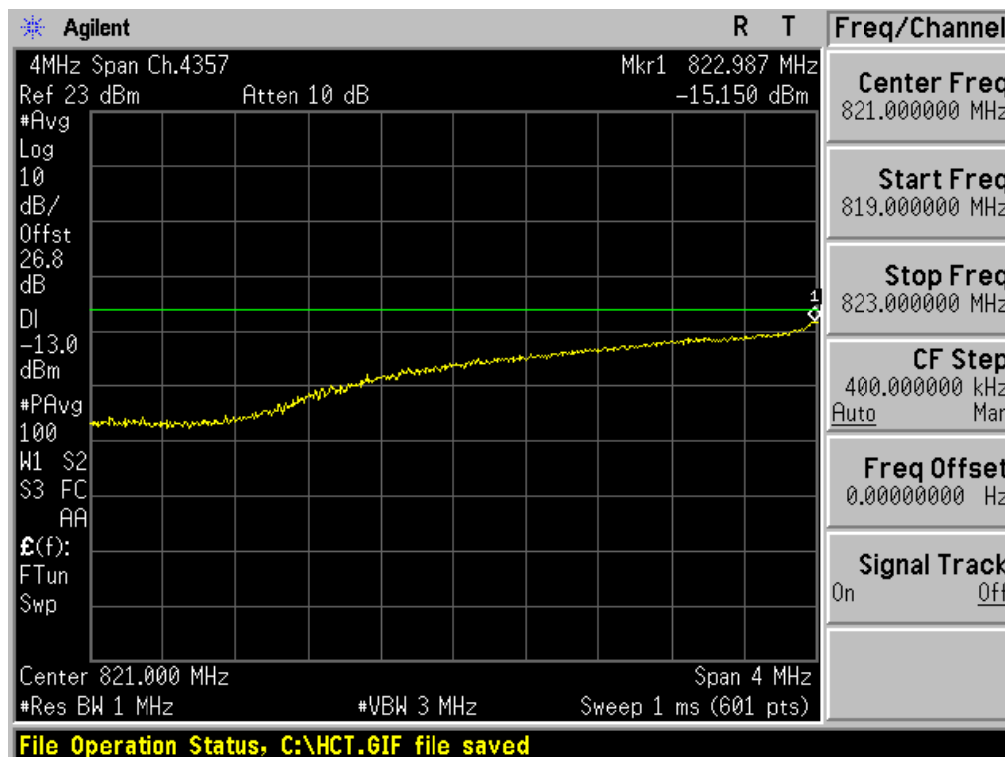


■ WCDMA850MODE (4233 CH.) Block Edge

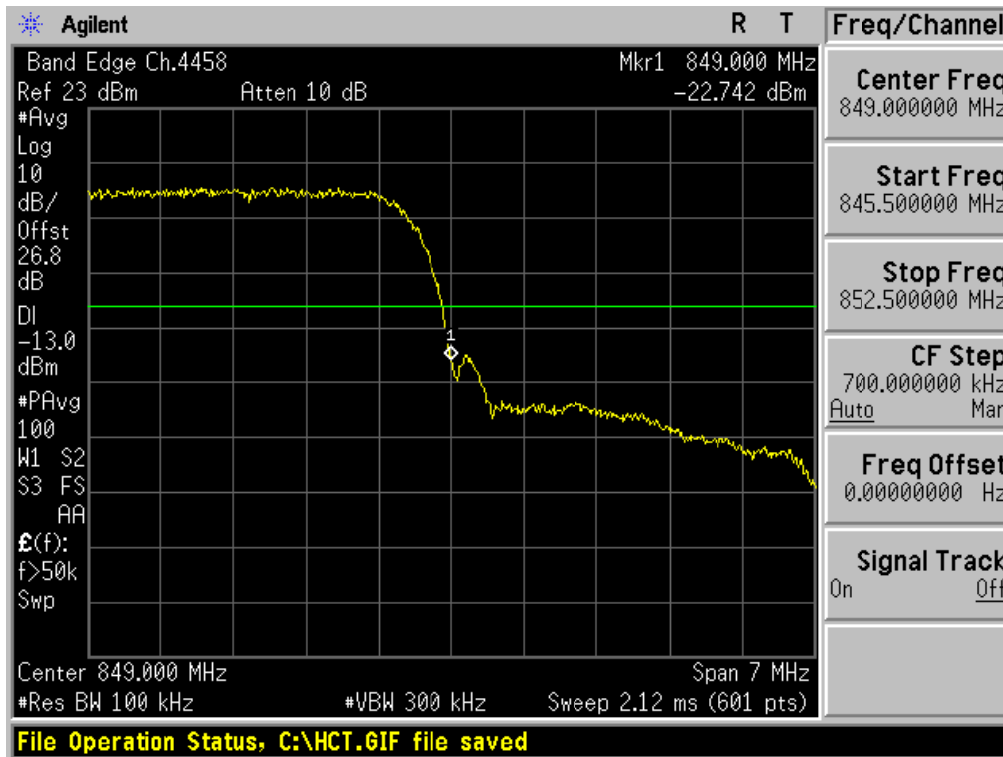


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

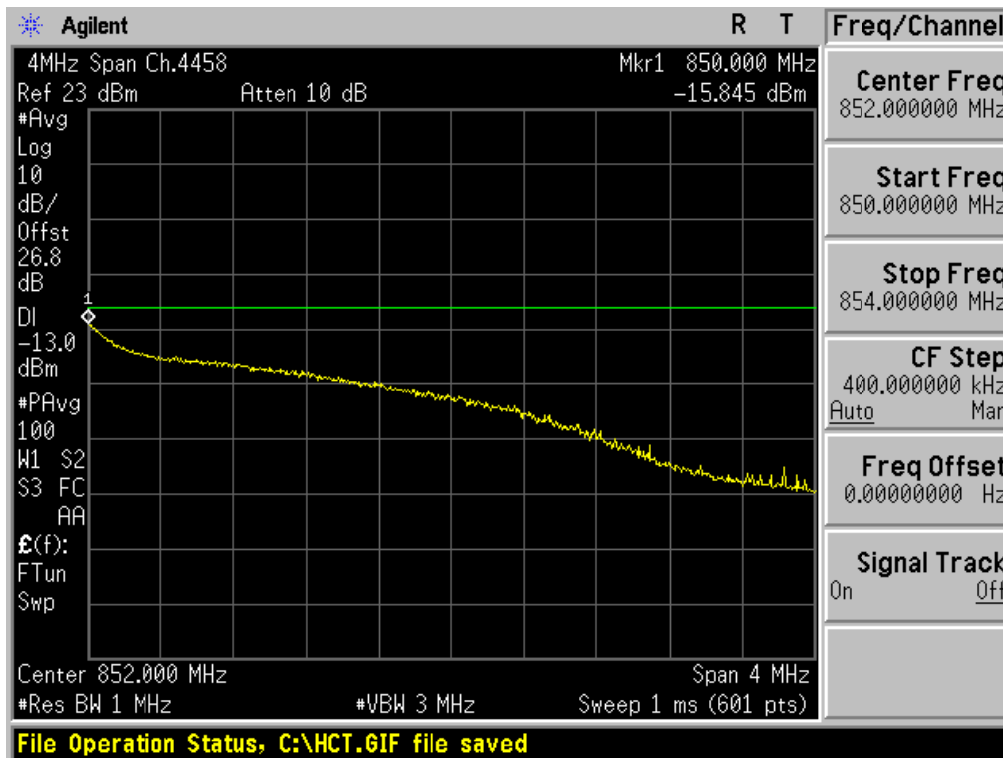


■ WCDMA1900 MODE (9262 CH.) Block Edge

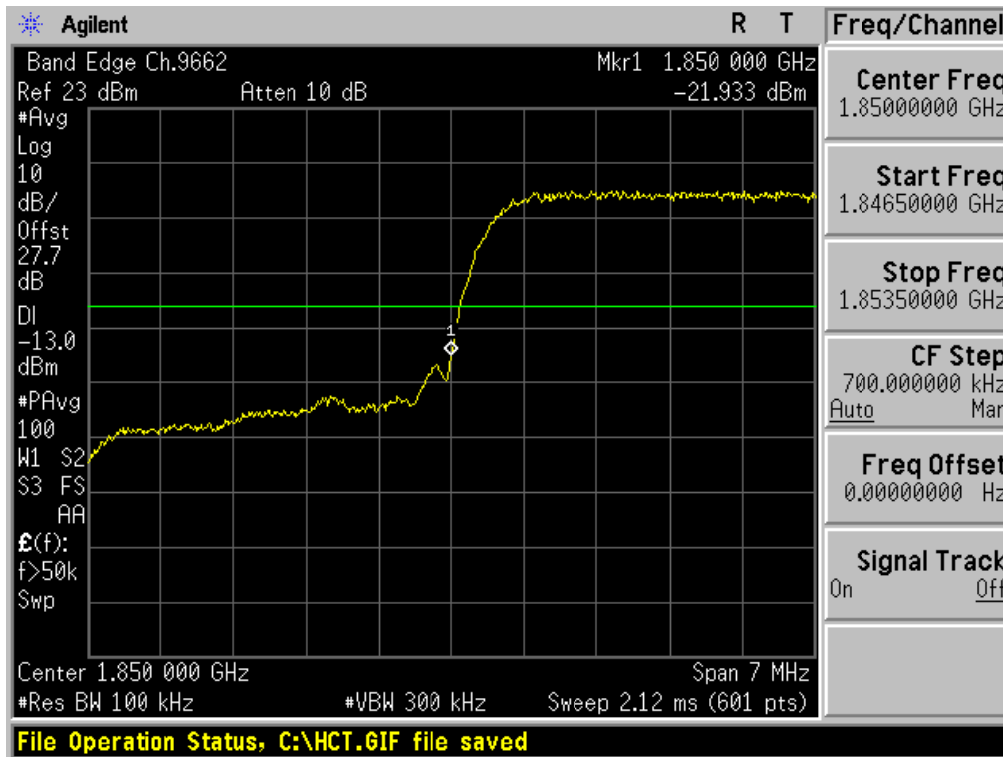


■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

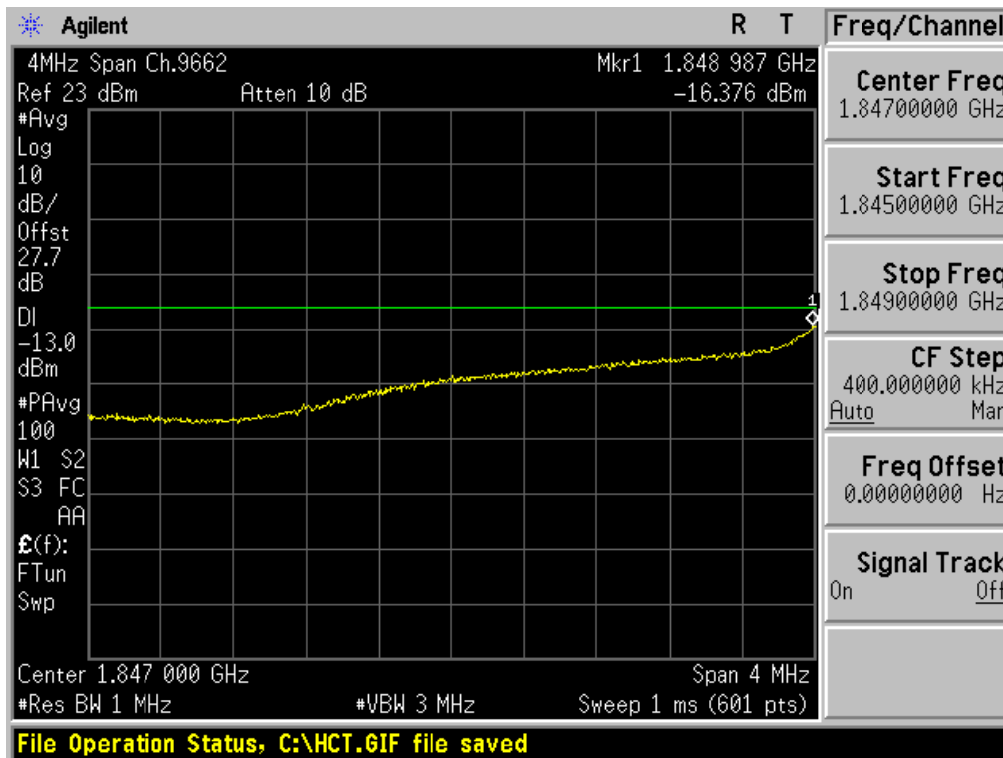


■ WCDMA1900 MODE (9538 CH.) Block Edge

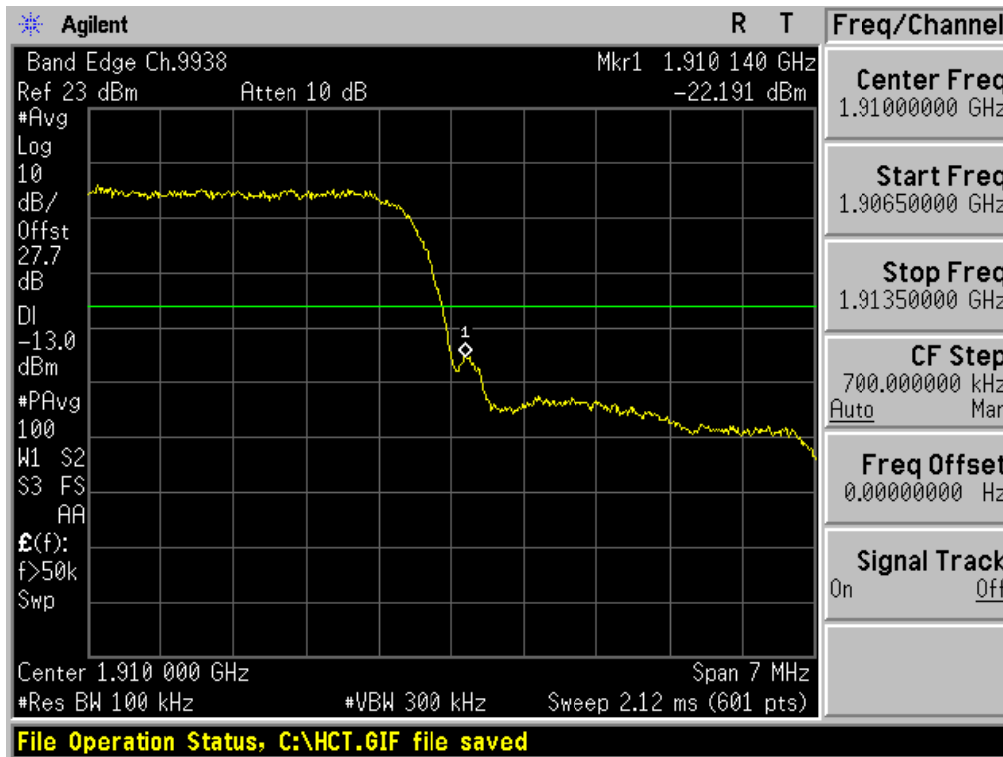


■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

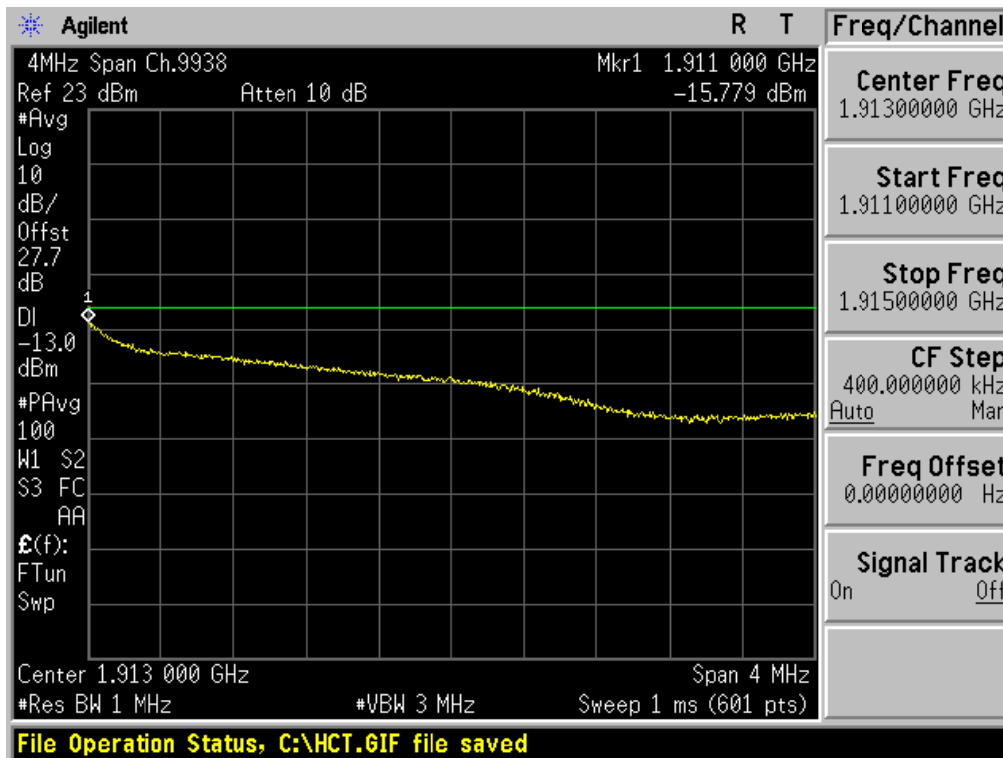


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

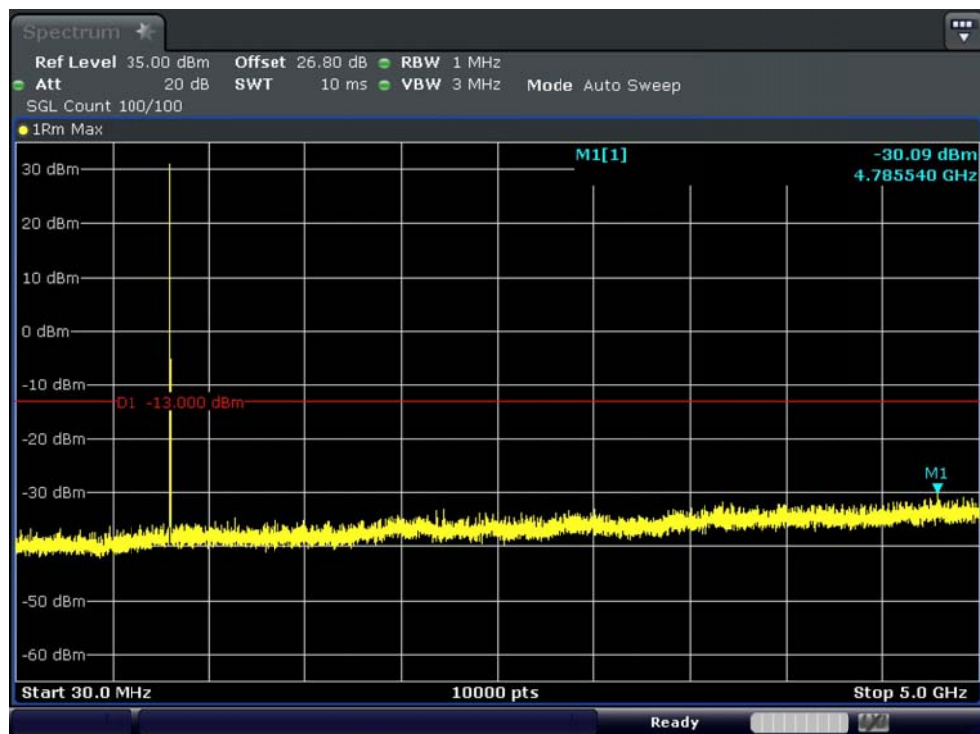


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

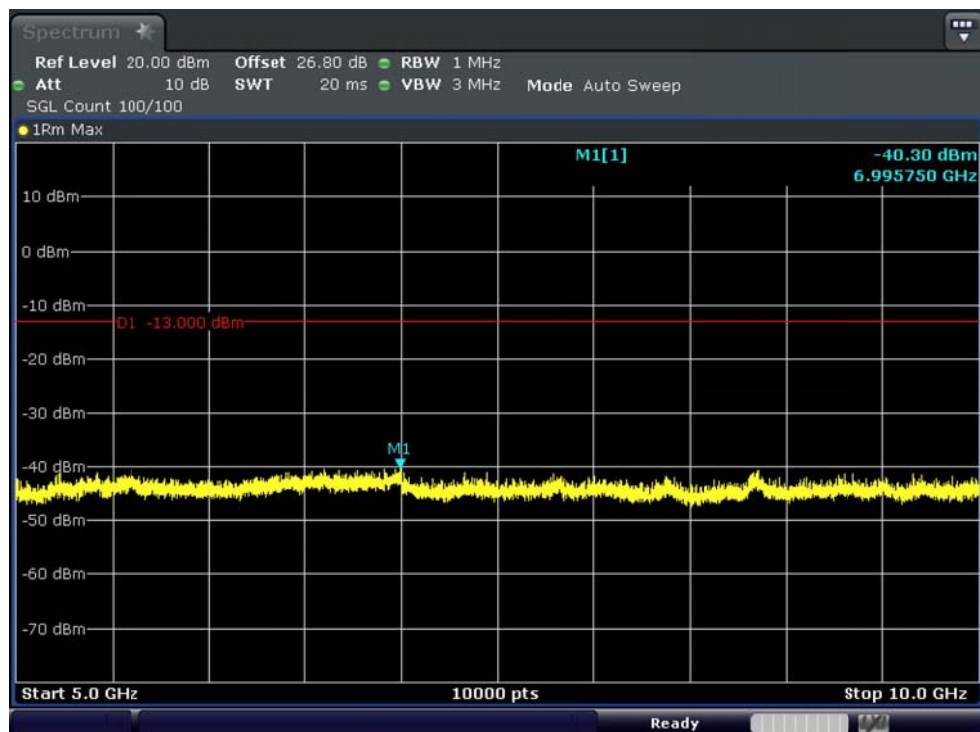


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

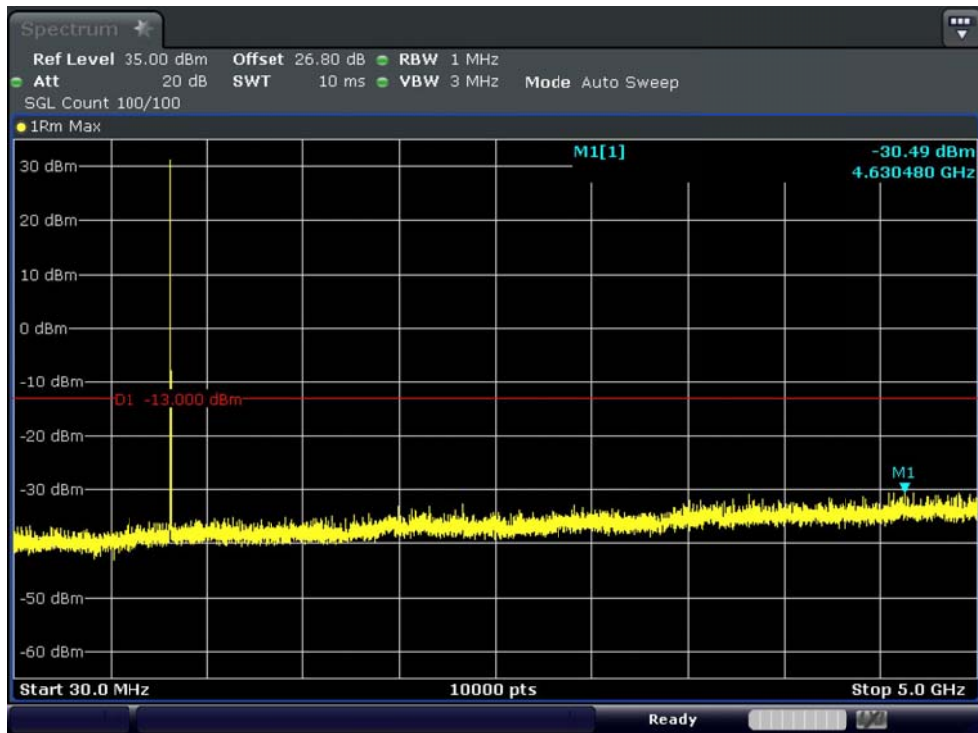


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

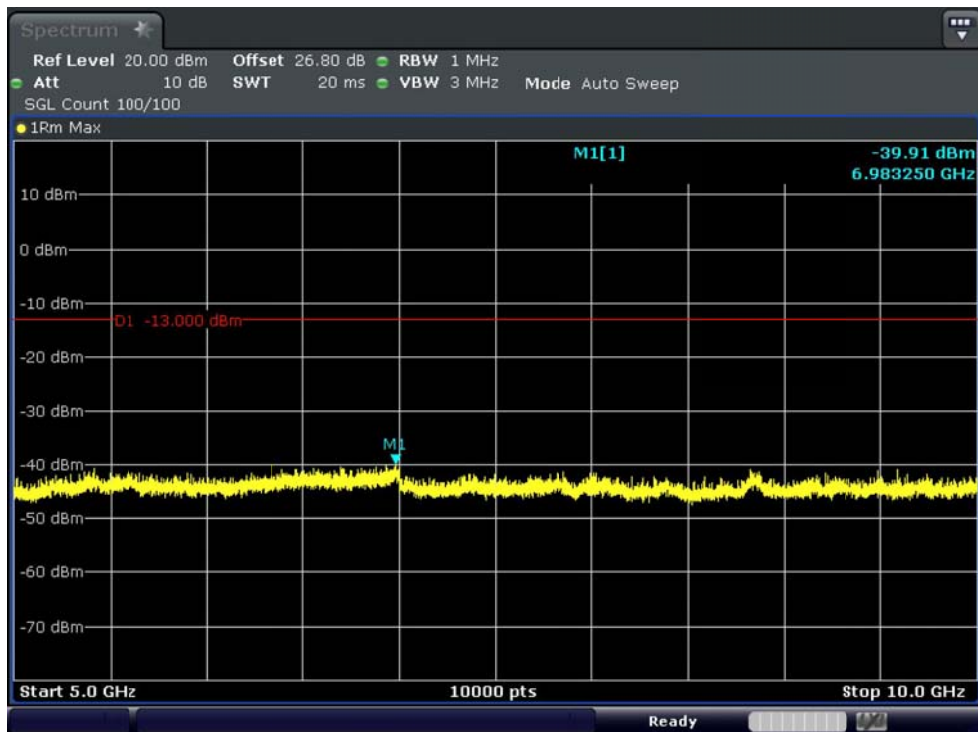


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

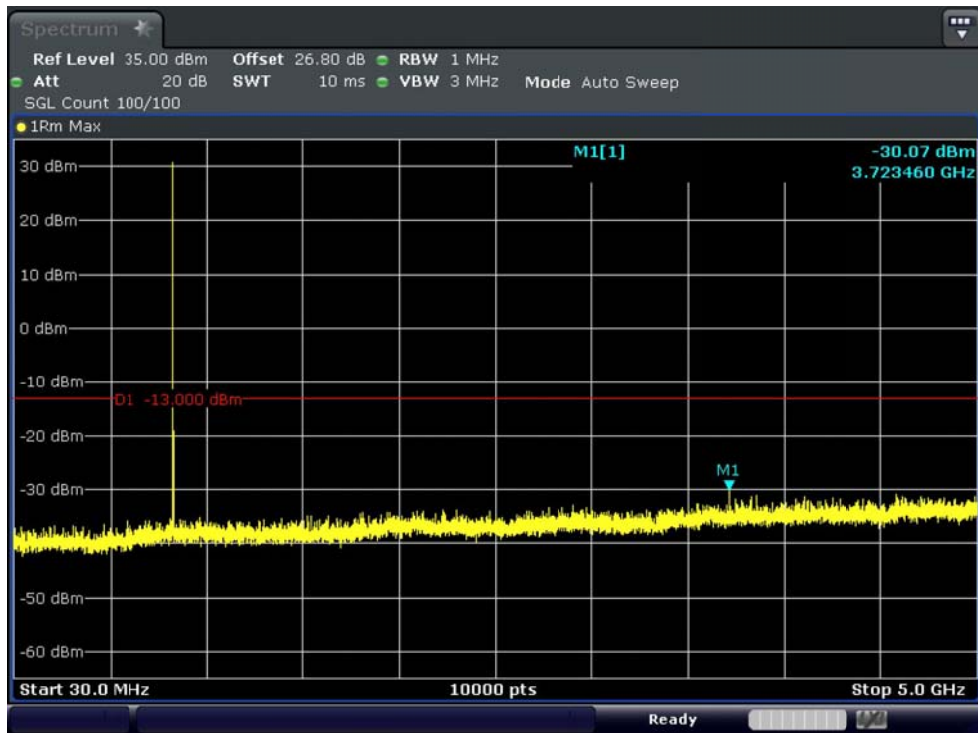


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

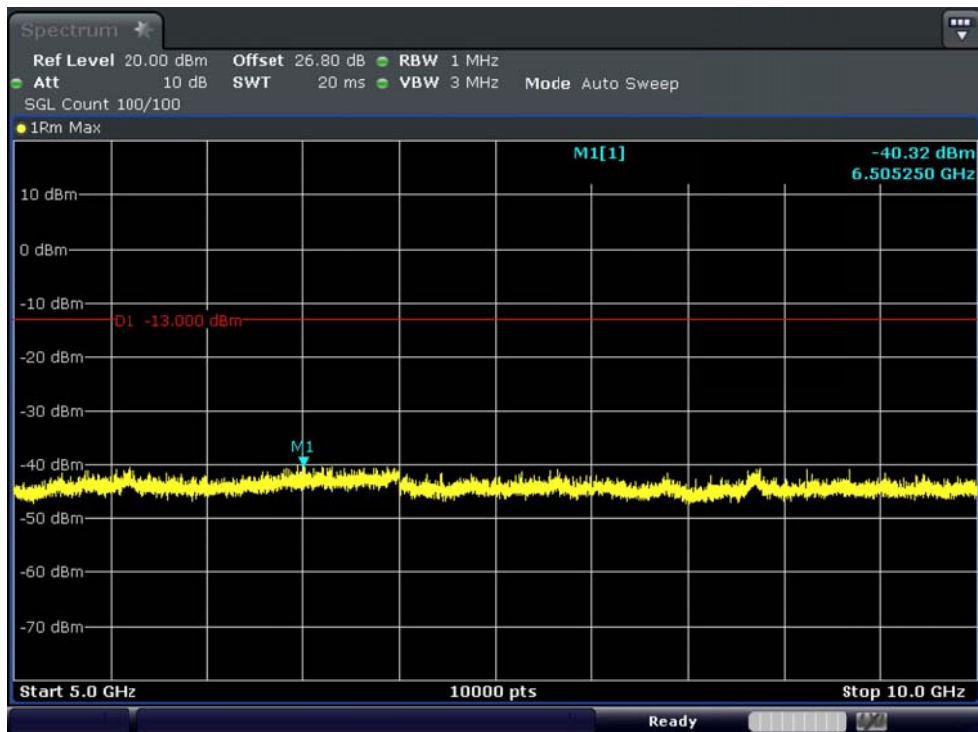


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

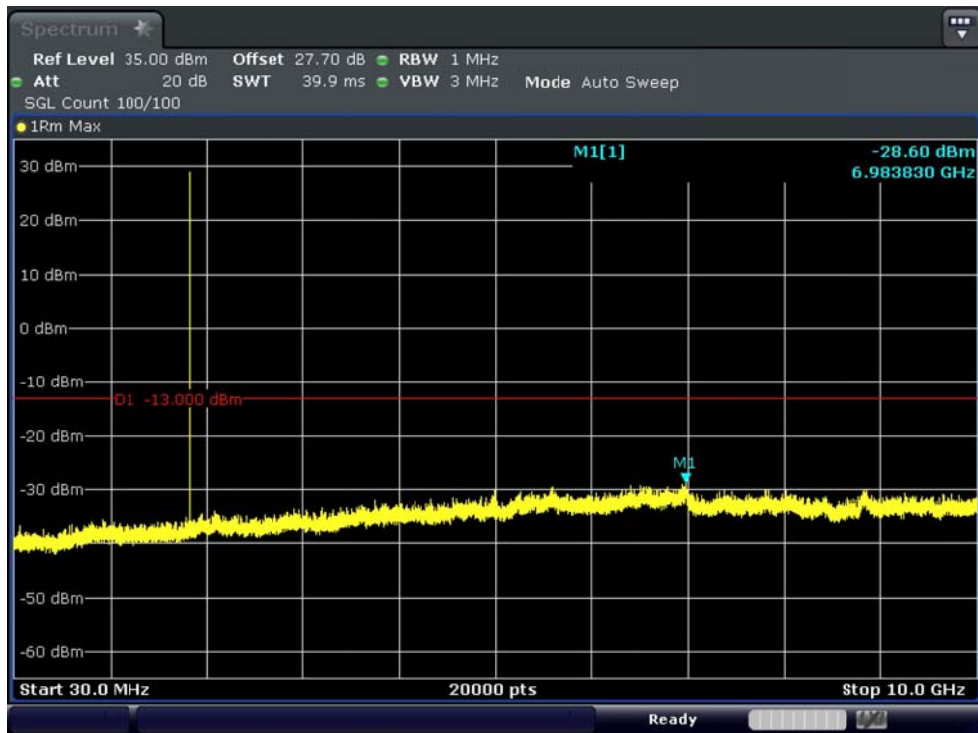


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

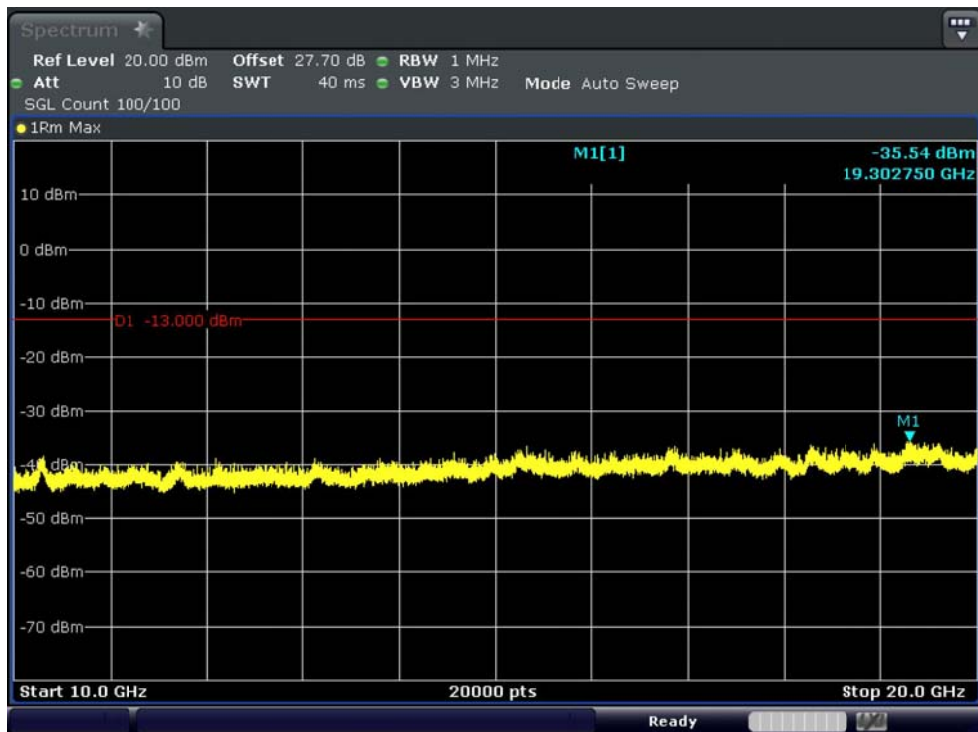


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

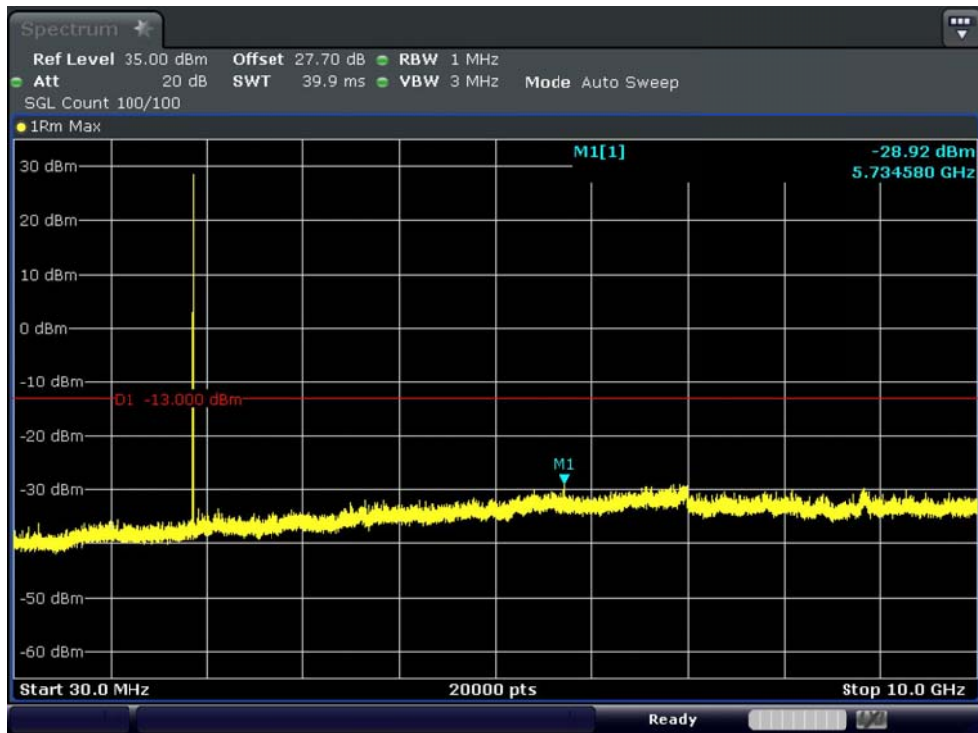


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

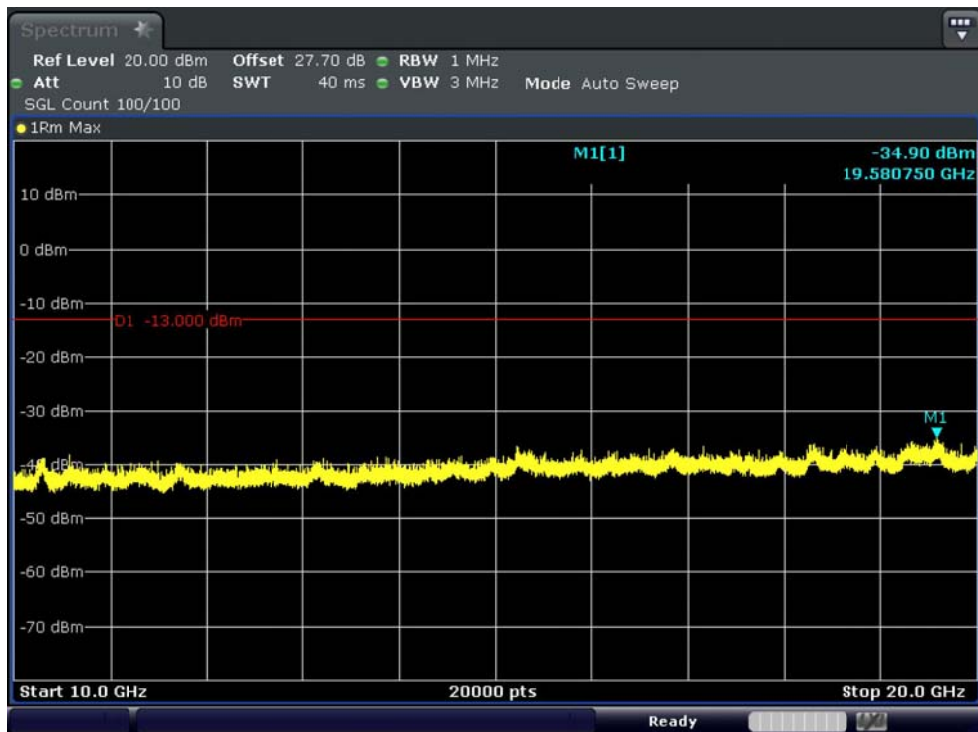


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

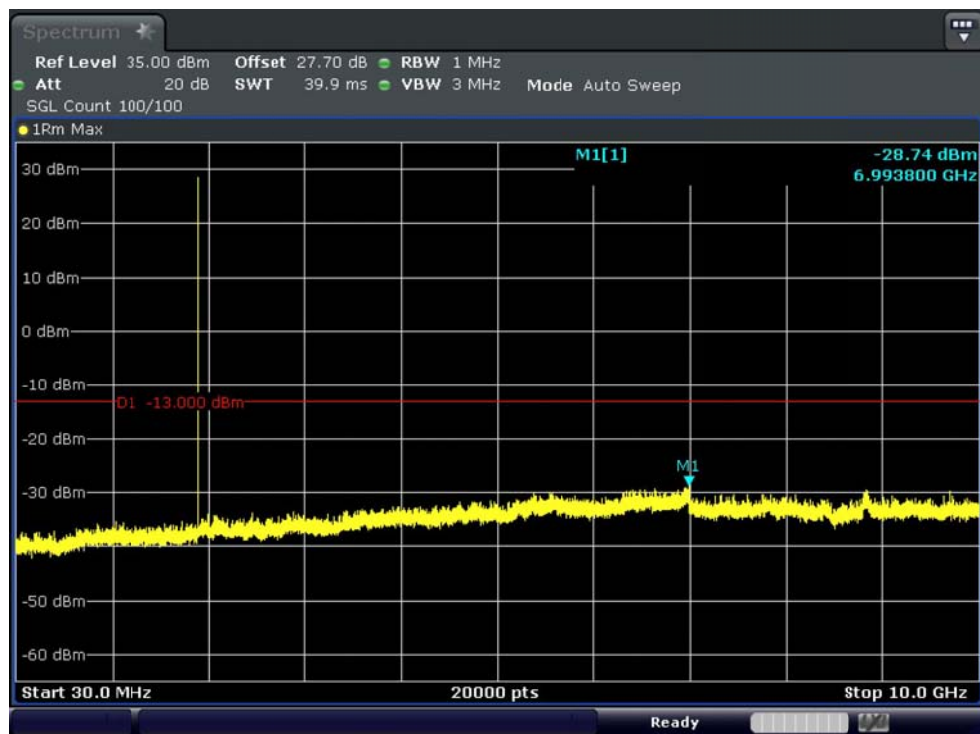


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

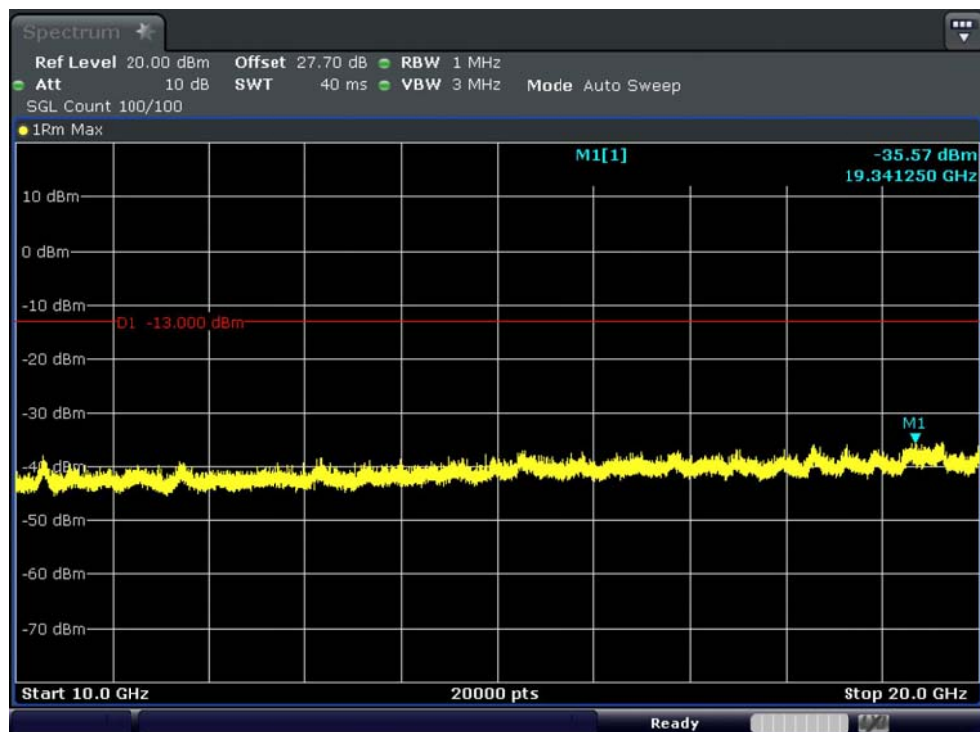


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

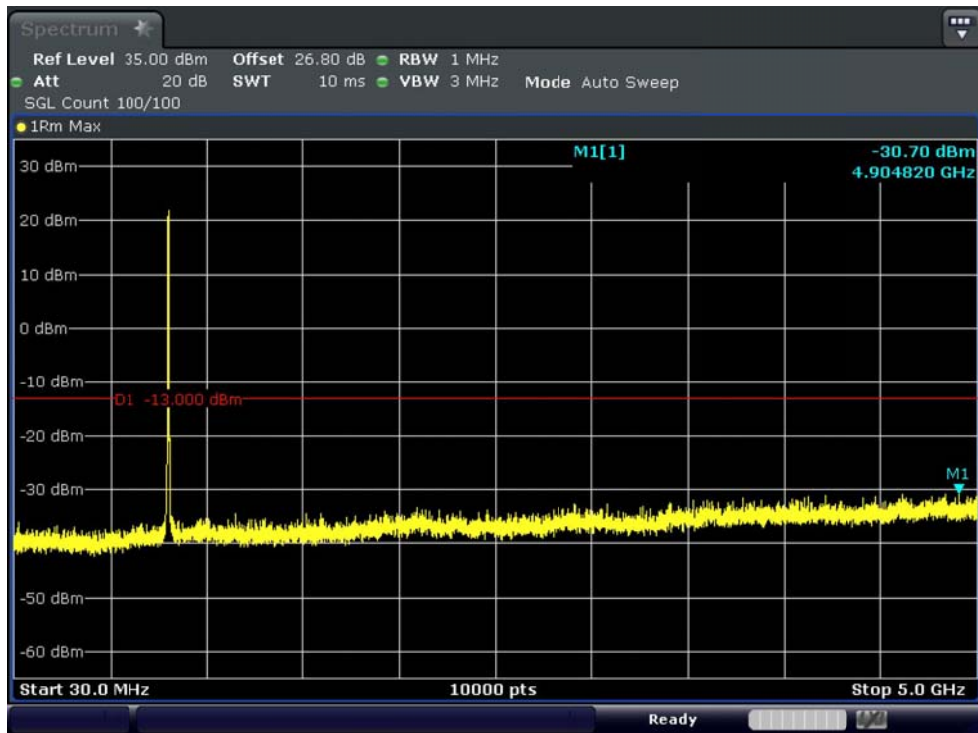


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

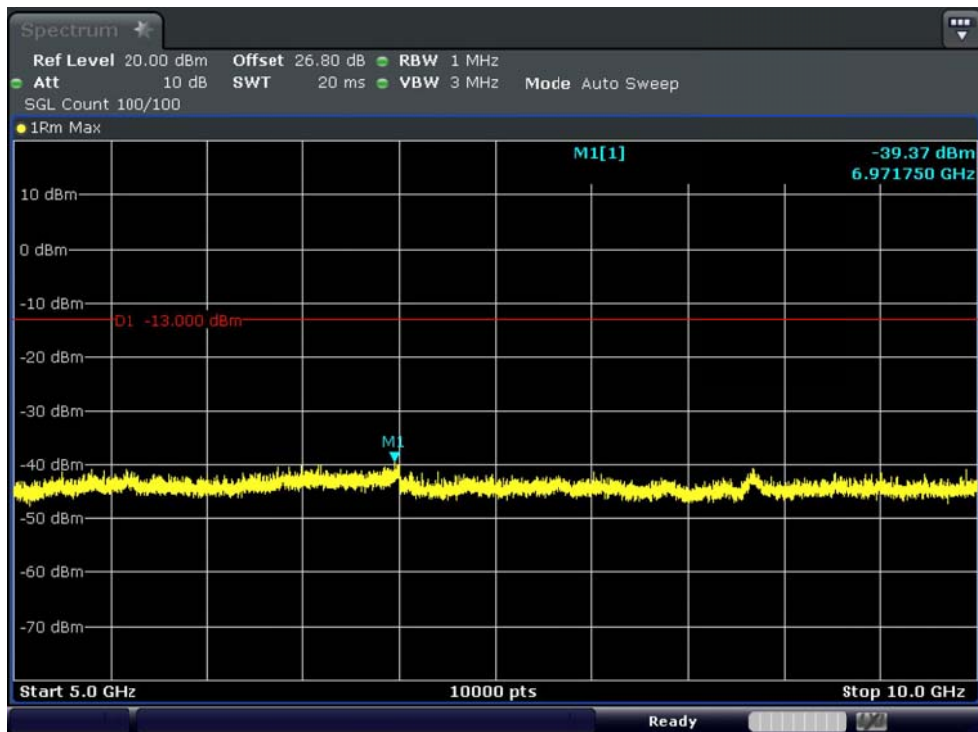


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

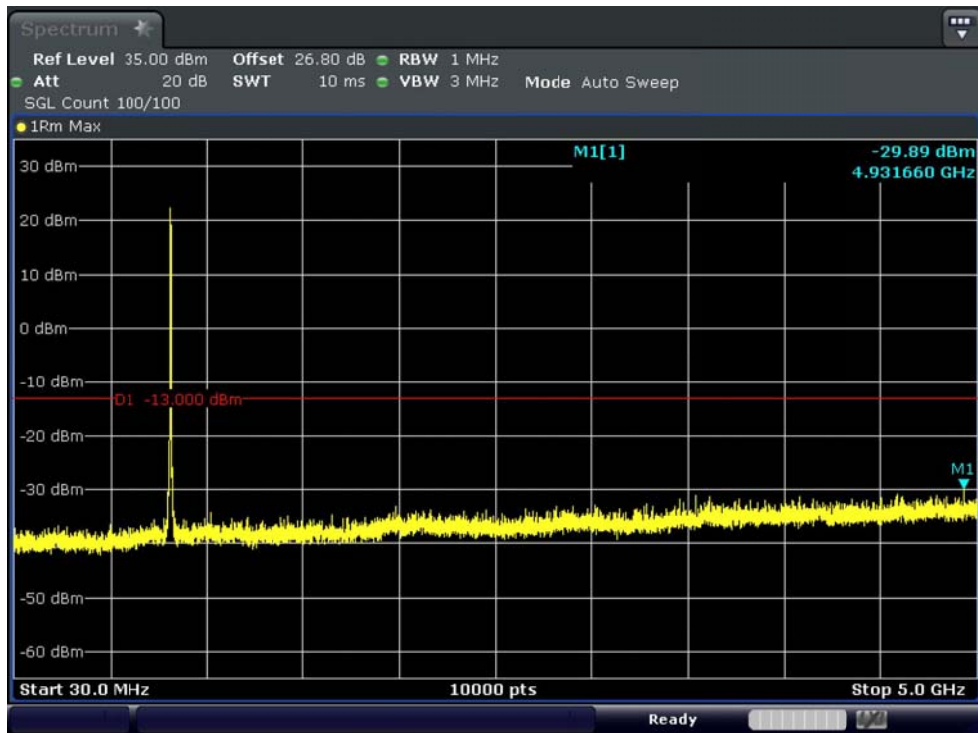


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

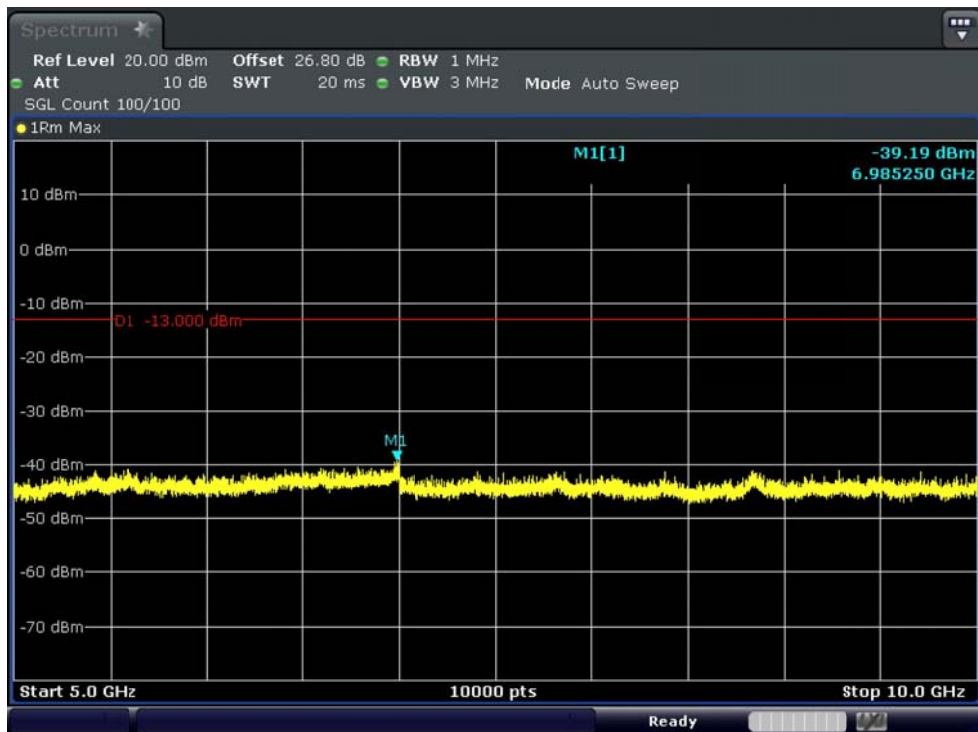


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

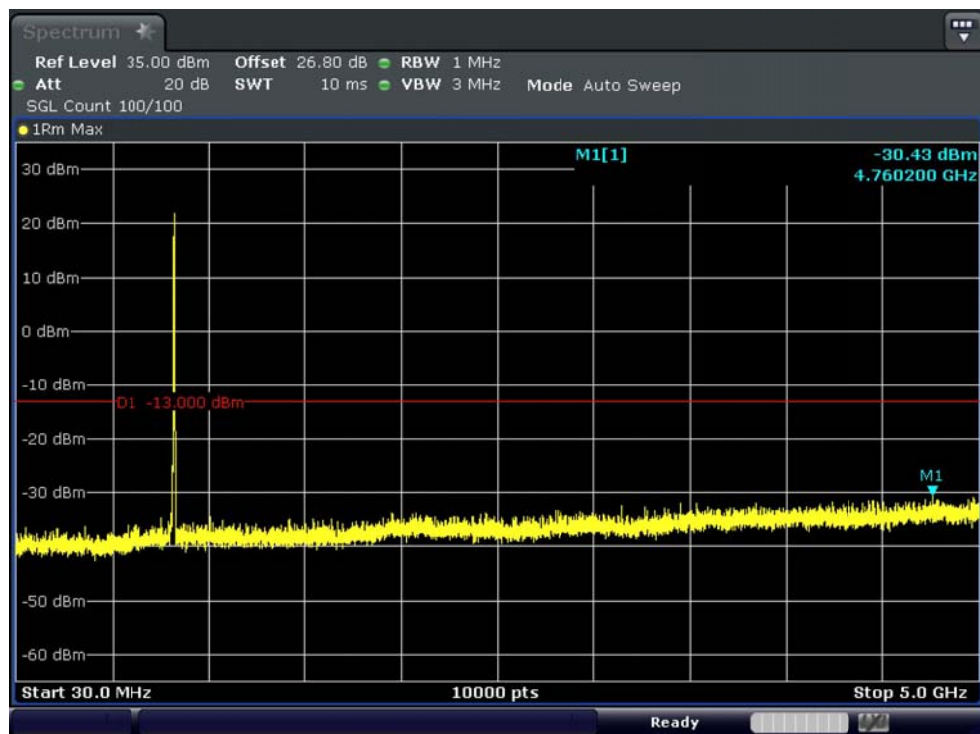


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

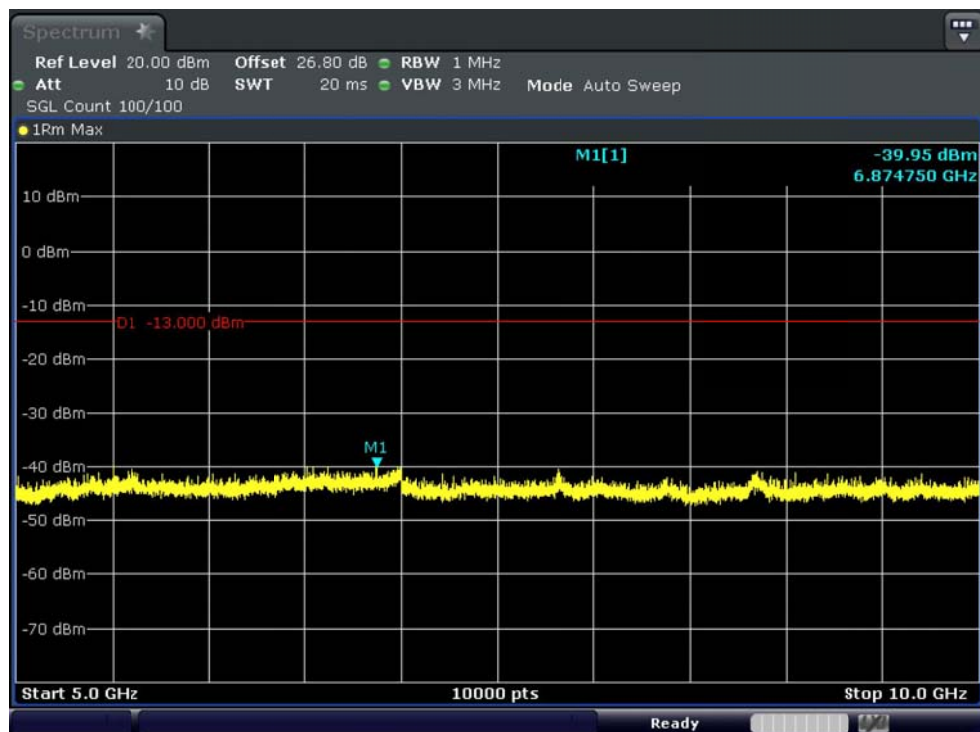


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

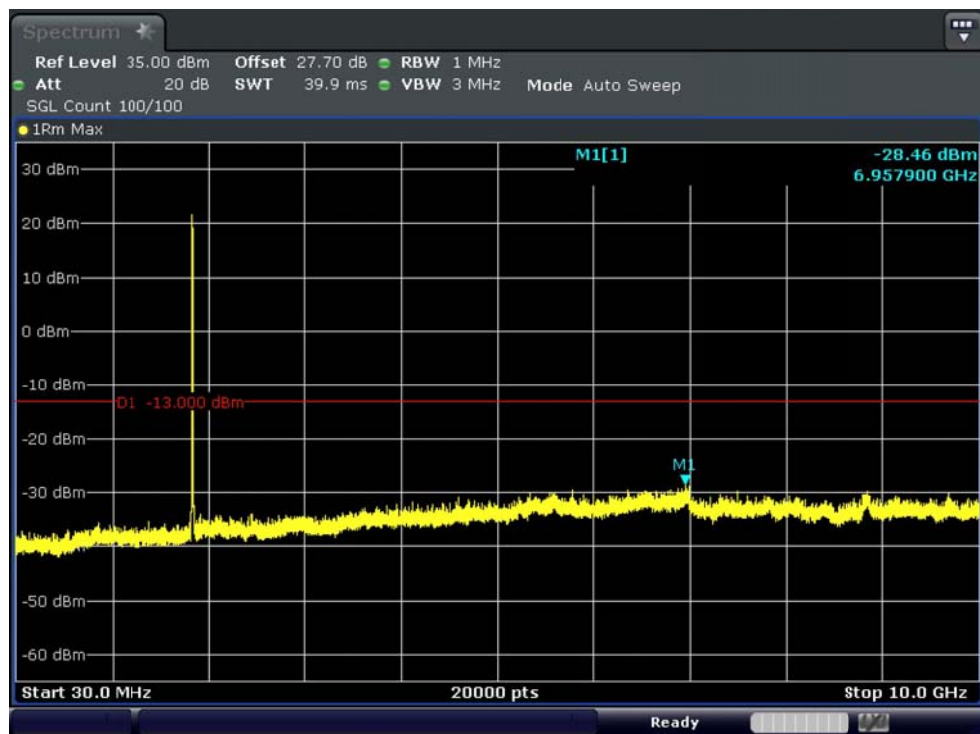


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

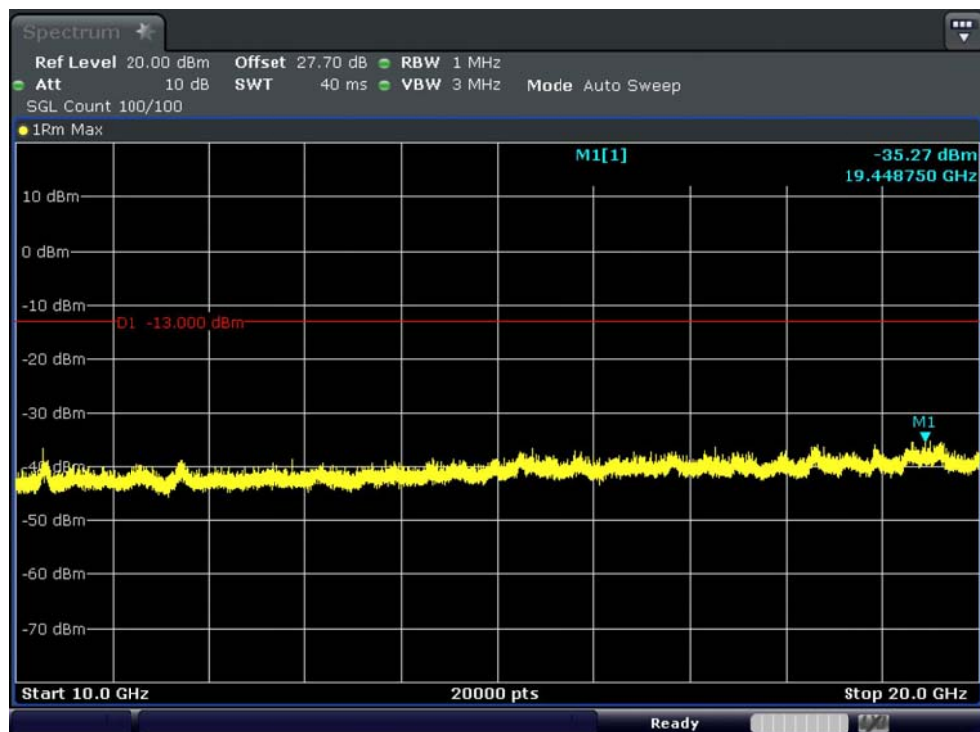


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

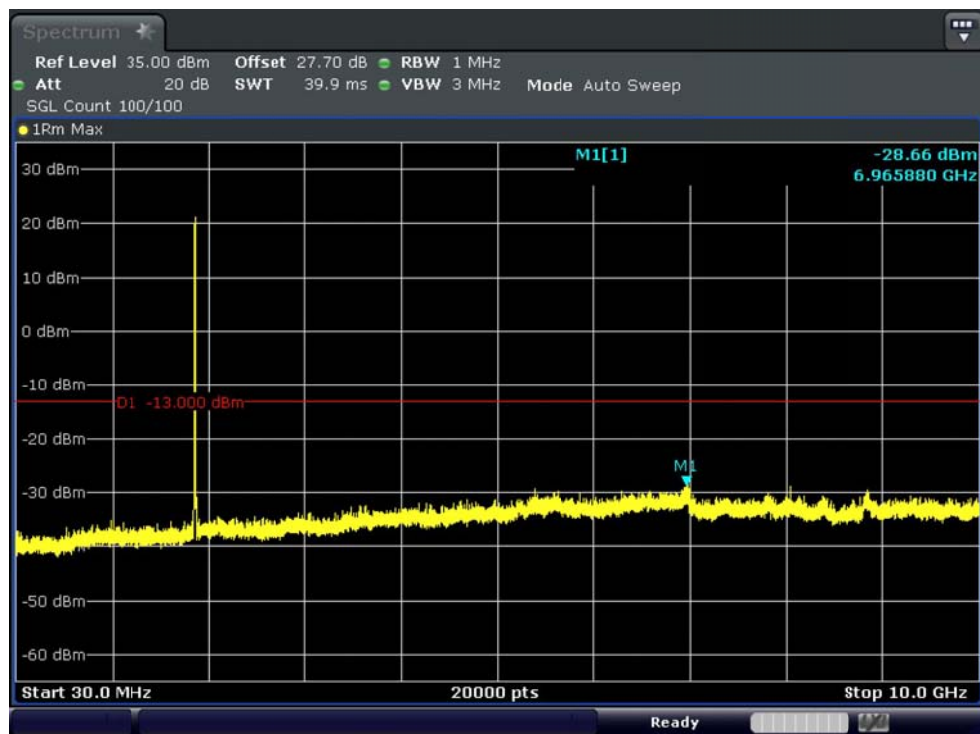

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

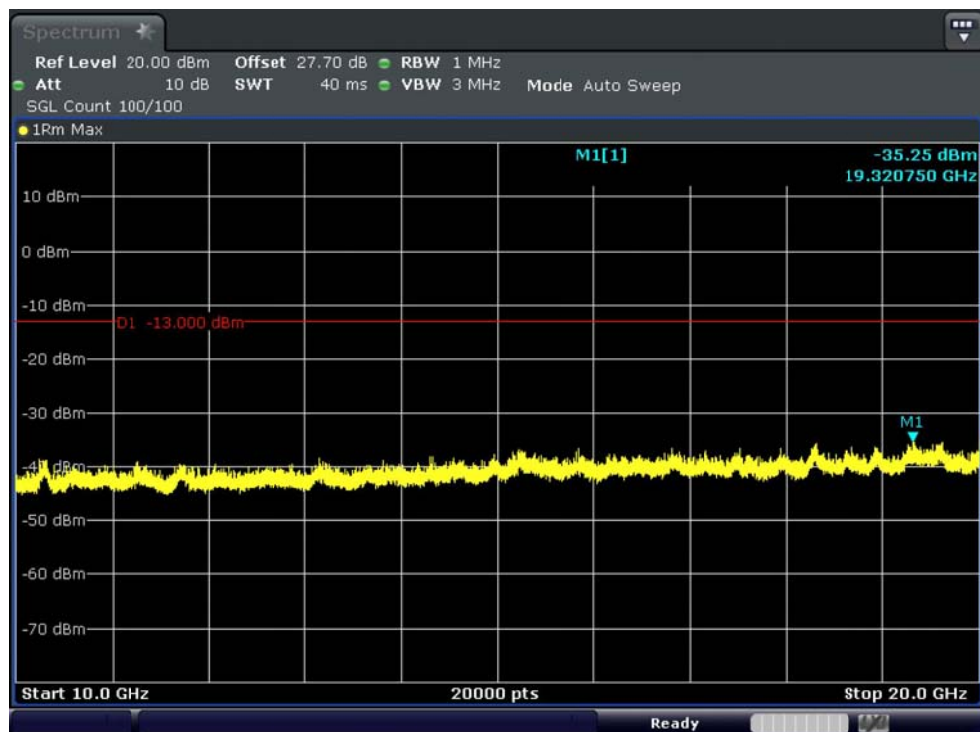

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

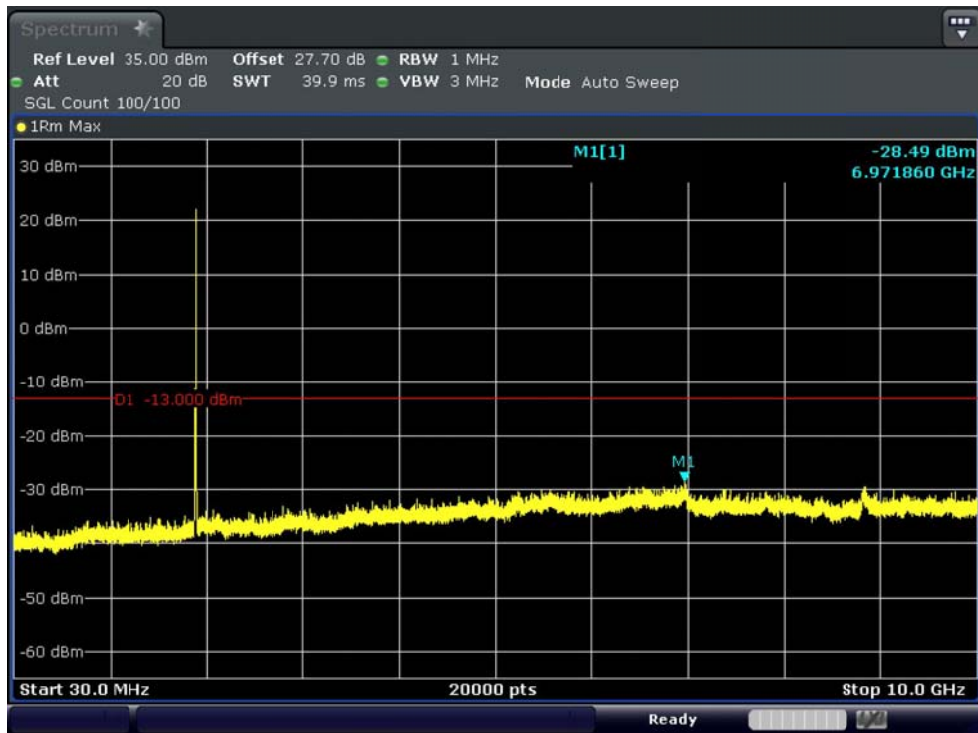

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

