



Test results

Test mode: LTE B14


5M BW QPSK Middle channel

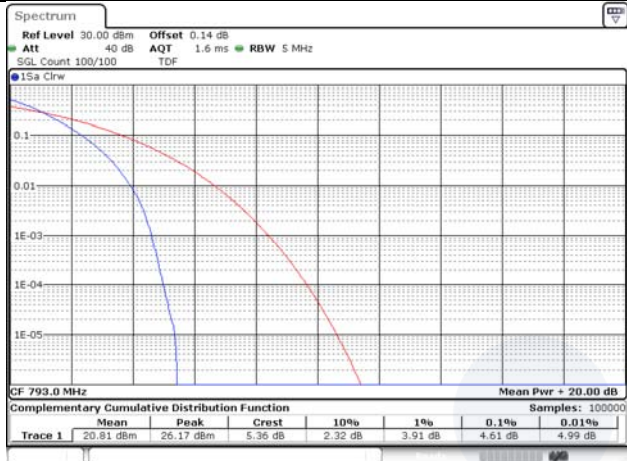


5M BW 16QAM Middle channel

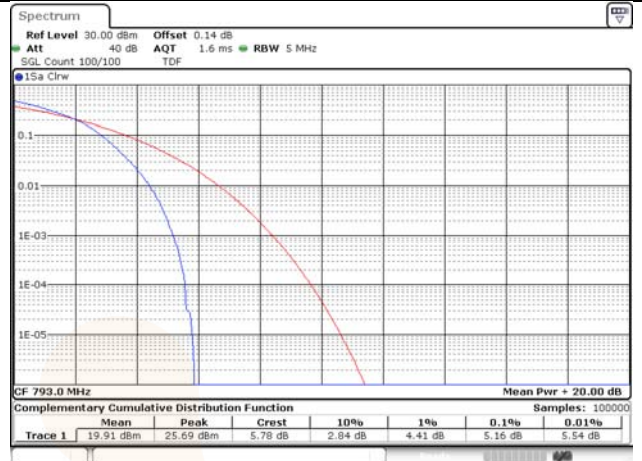


10M BW QPSK Middle channel

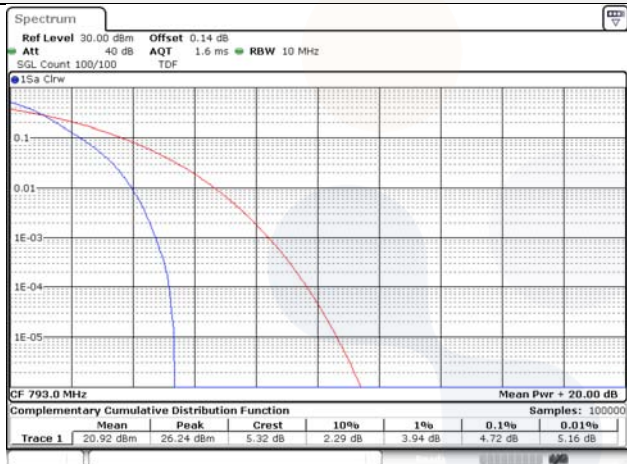


10M BW 16QAM Middle channel

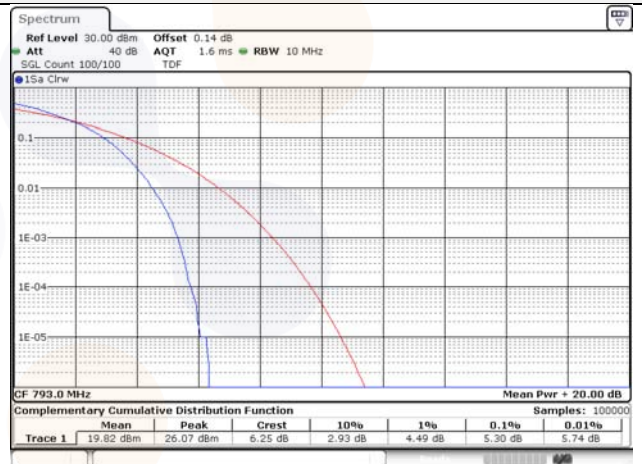


Test mode: LTE B26

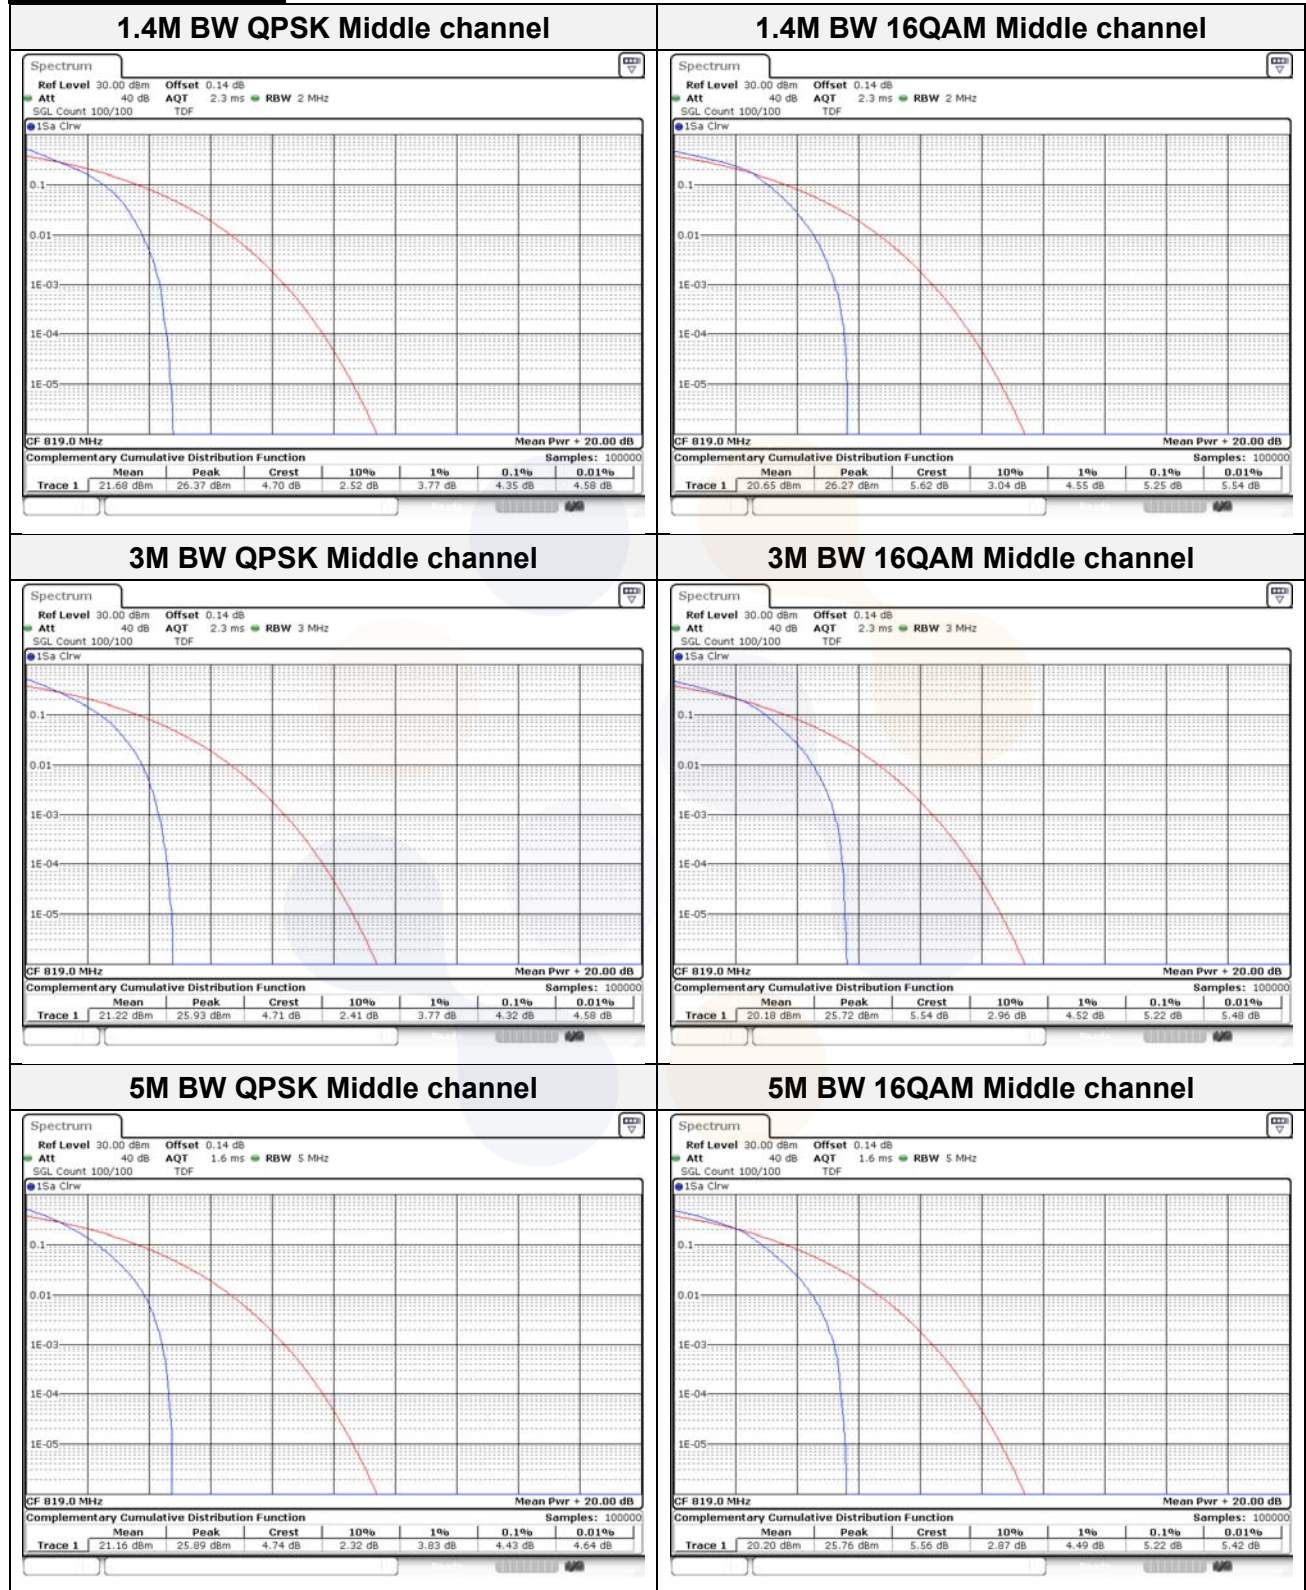

10M BW QPSK Middle channel

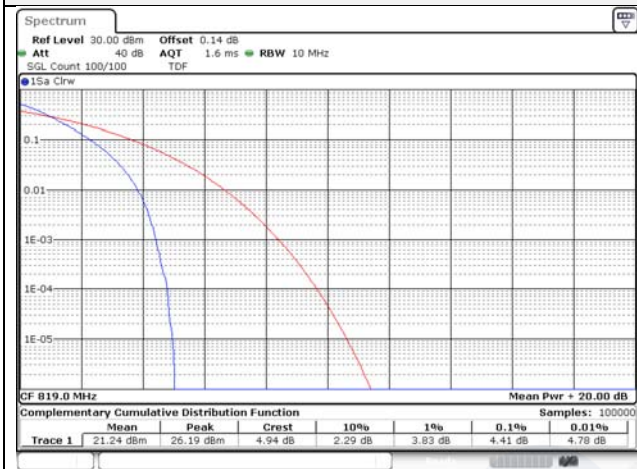


10M BW 16QAM Middle channel

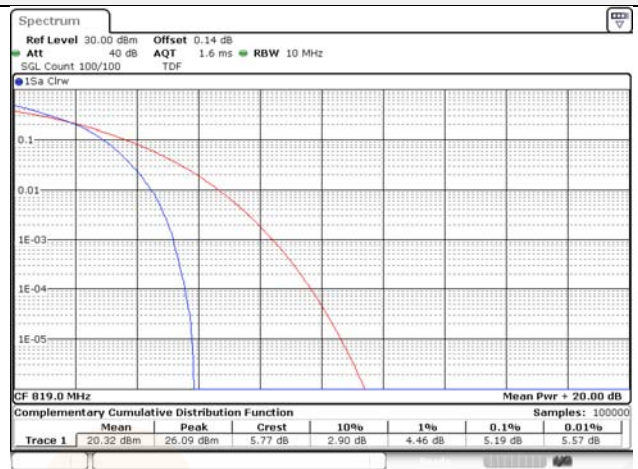

15M BW QPSK Middle channel




15M BW 16QAM Middle channel

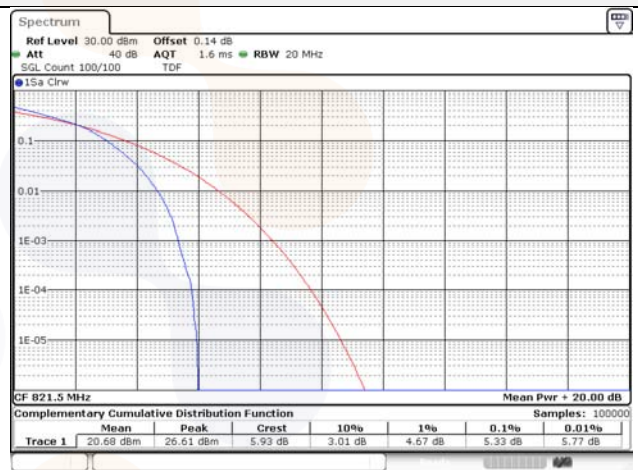

7.6. Frequency stability

Test setup

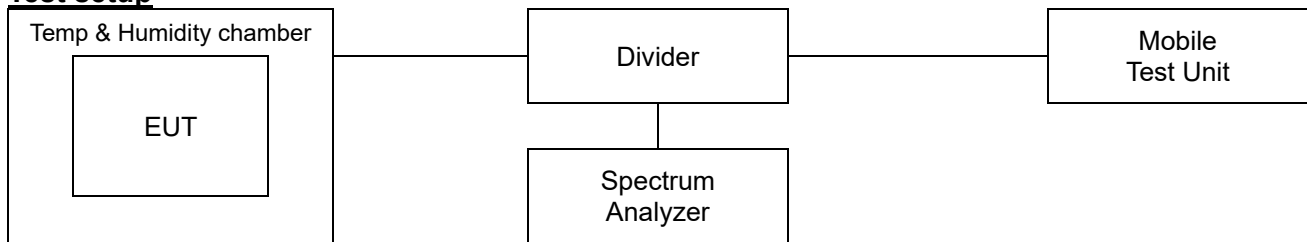

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to + 50° centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to + 50° centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),

The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §90.539(e),

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

According to §90.213,

For mobile devices operating in the 809 to 824 MHz band at a power level 2 Watts or less, the limit specified in Table is ± 2.5 ppm.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0027 Page (55) of (68)	 
--	---	--

Test procedure

ANSI 63.26-2015 – Section 5.6

Test settings


- 1) The carrier frequency of the transmitter is measured at room temperature.
(20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.



Test results


Test mode : LTE B14
 Frequency (Hz) : 793 000 000
 Channel : 23330
 Deviation limit : The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation		Limit (ppm)
					(ppm)	(%)	
100%	3.88	+21.5(Ref)	793,000,000	0.06	0.0	0.000000	1.25
		-30	792,999,998	-2.09	0.0	0.000000	
		-20	792,999,999	-0.92	0.0	0.000000	
		-10	793,000,000	-0.14	0.0	0.000000	
		0	793,000,000	0.21	0.0	0.000000	
		+10	793,000,003	3.05	0.0	0.000000	
		+20	792,999,999	-0.62	0.0	0.000000	
		+30	793,000,003	3.3	0.0	0.000000	
		+40	793,000,001	1.17	0.0	0.000000	
		+50	793,000,003	2.52	0.0	0.000000	
115%	4.46	+21.5(Ref)	793,000,000	0.3	0.0	0.000000	1.25
End point	3.40	+21.5(Ref)	793,000,000	0.29	0.0	0.000000	

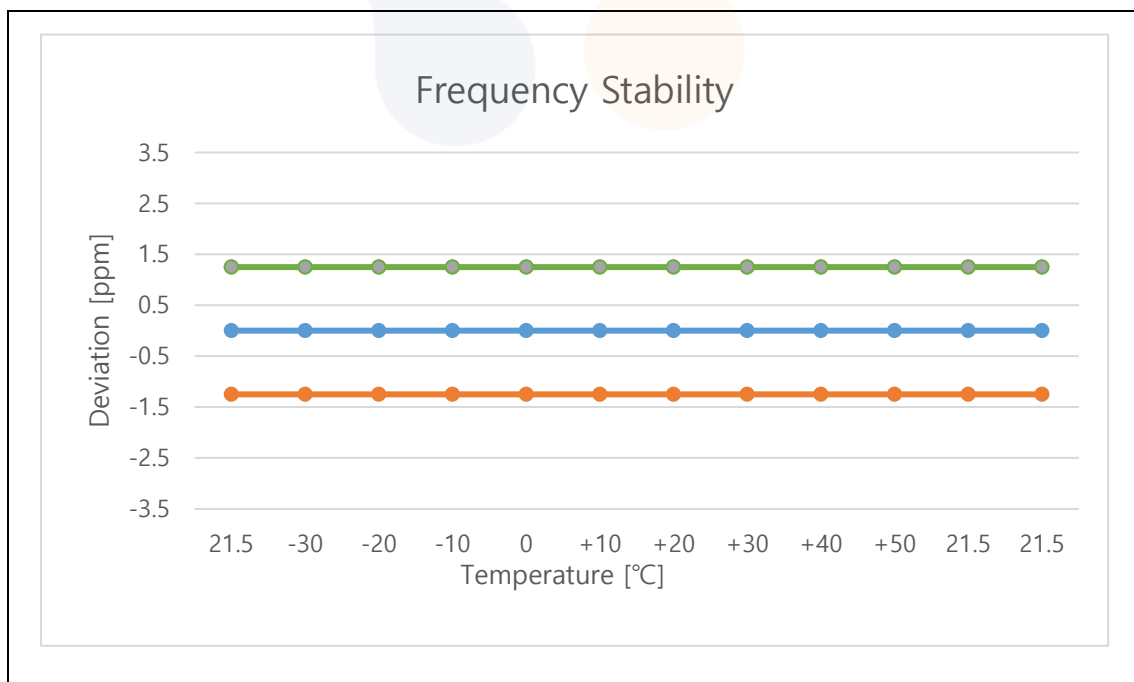

Test mode : LTE B26
 Frequency (Hz) : 819 000 000
 Channel : 26740
 Deviation limit : ±0.000 25% or 2.5ppm


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.88	+21.5(Ref)	819,000,000	0.40	0.0	0.000000
		-30	819,000,002	2.16	0.0	0.000000
		-20	819,000,002	1.59	0.0	0.000000
		-10	819,000,001	1.10	0.0	0.000000
		0	819,000,002	1.69	0.0	0.000000
		+10	819,000,000	-0.24	0.0	0.000000
		+20	819,000,000	-0.10	0.0	0.000000
		+30	819,000,001	0.77	0.0	0.000000
		+40	819,000,003	3.43	0.0	0.000000
		+50	819,000,003	2.55	0.0	0.000000
115%	4.46	+21.5(Ref)	819,000,001	0.66	0.0	0.000000
End point	3.40	+21.5(Ref)	818,999,999	-0.96	0.0	0.000000

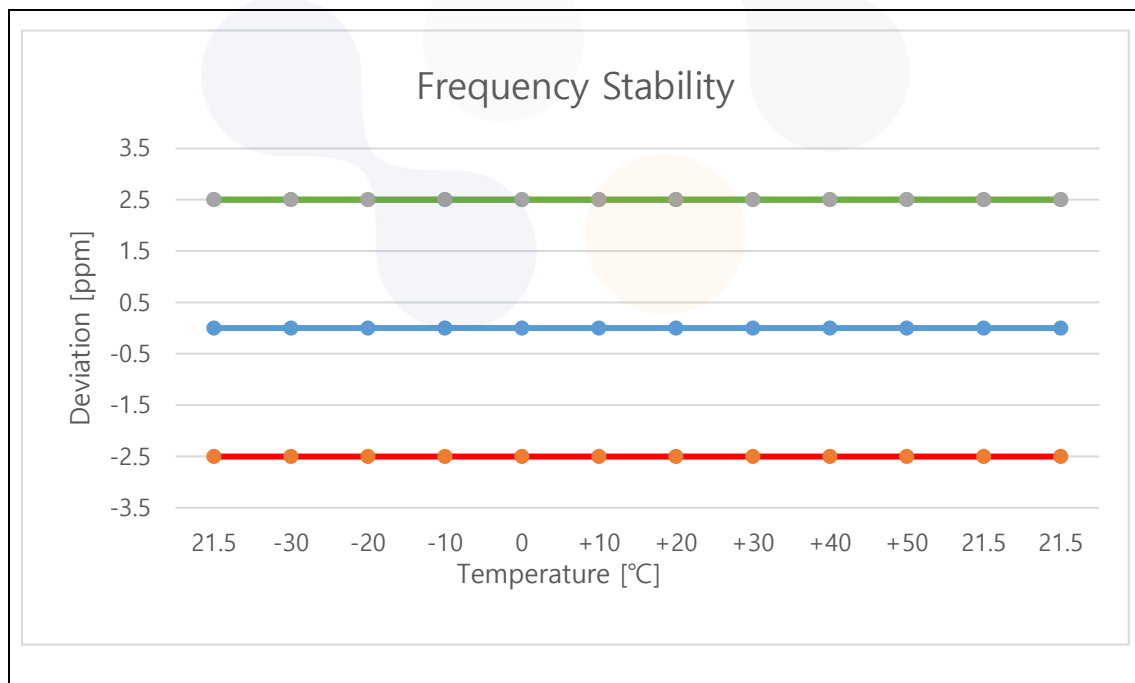


7.7. Radiated Power (ERP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

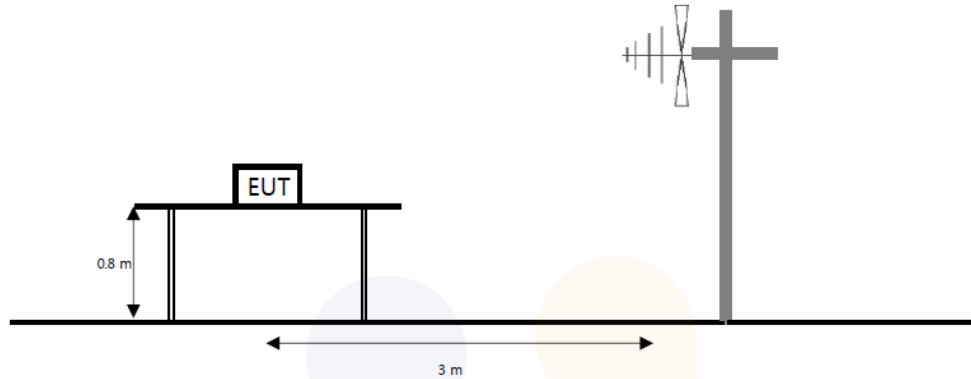

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

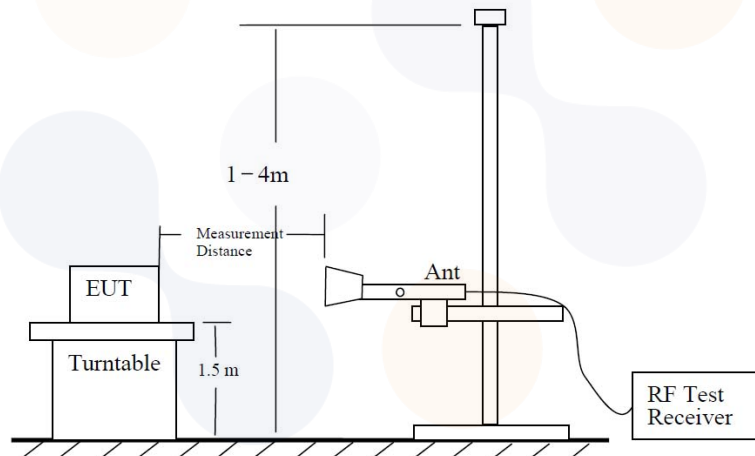

The diagram below shows the test setup for substituted method.

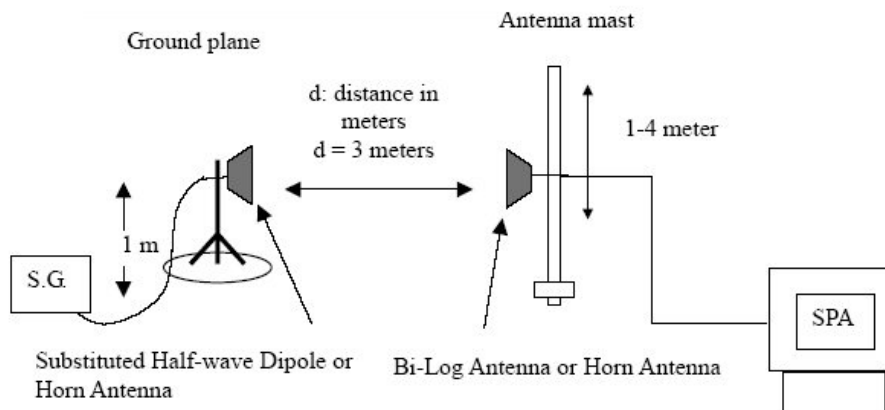

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0027 Page (59) of (68)	
--	---	---

Limit

According to §90.542(a)(7),

Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

According to §90.635(b),

The maximum output power of the transmitter for mobile stations is 100 watts(20 dBw).

Test procedure

412172 D01 v01r01

971168 D01 v03r01 - Section 5.2 and 5.8

ANSI 63.26-2015 – Section 5.2

ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 $\times$ to 3 $\times$ the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0027 Page (60) of (68)	
---	--	---

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
 The power is calculated by the following formula;

$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$
 Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results

Test mode: LTE B14

Bandwidth [MHz]	Modulation	Channel	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
			[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
5	QPSK	Low	H	3.15	5.90	13.37	10.62	0.012
		Middle	H	3.15	5.92	12.78	10.01	0.010
		High	H	3.15	5.91	12.31	9.55	0.009
	16QAM	Low	H	3.15	5.90	12.47	9.72	0.009
		Middle	H	3.15	5.92	11.92	9.15	0.008
		High	H	3.15	5.91	11.42	8.66	0.007
10	QPSK	Middle	H	3.15	5.92	12.99	10.22	0.011
	16QAM	Middle	H	3.15	5.92	12.03	9.26	0.008

Note.

1. $E.R.P(dBm) = \text{Substitute Level}(dB) + \text{Antenna gain}(dBd) - C.L(\text{Cable loss})(dB)$

Test mode: LTE B26

Bandwidth [MHz]	Modulation	Channel	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
			[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
1.4	QPSK	Low	H	3.19	6.01	13.22	10.40	0.011
		Middle	H	3.32	6.03	12.98	10.27	0.011
		High	H	3.38	6.07	13.58	10.89	0.012
	16QAM	Low	H	3.19	6.01	12.14	9.33	0.009
		Middle	H	3.32	6.03	11.87	9.16	0.008
		High	H	3.38	6.07	12.59	9.90	0.010
3	QPSK	Low	H	3.22	6.01	13.45	10.66	0.012
		Middle	H	3.32	6.03	13.04	10.33	0.011
		High	H	3.38	6.05	13.52	10.85	0.012
	16QAM	Low	H	3.22	6.01	12.21	9.41	0.009
		Middle	H	3.32	6.03	12.08	9.37	0.009
		High	H	3.38	6.05	12.25	9.58	0.009
5	QPSK	Low	H	3.25	6.03	13.27	10.49	0.011
		Middle	H	3.32	6.03	12.76	10.05	0.010
		High	H	3.37	6.04	13.44	10.76	0.012
	16QAM	Low	H	3.25	6.03	12.20	9.41	0.009
		Middle	H	3.32	6.03	11.67	8.96	0.008
		High	H	3.37	6.04	12.56	9.89	0.010
10	QPSK	Middle	H	3.32	6.03	13.09	10.38	0.011
	16QAM	Middle	H	3.32	6.03	11.97	9.26	0.008
15	QPSK	Middle	H	3.37	6.04	13.30	10.63	0.012
	16QAM	Middle	H	3.37	6.04	12.32	9.64	0.009

Test mode: LTE B26 (Straddle channel)

Bandwidth [MHz]	Modulation	Channel	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
			[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
1.4	QPSK	Middle	H	3.39	6.08	13.62	10.93	0.012
	16QAM		H	3.39	6.08	12.69	10.01	0.010
3	QPSK		H	3.39	6.08	13.70	11.02	0.013
	16QAM		H	3.39	6.08	12.82	10.13	0.010
5	QPSK		H	3.39	6.08	13.77	11.09	0.013
	16QAM		H	3.39	6.08	12.67	9.98	0.010
10	QPSK		H	3.39	6.08	13.83	11.15	0.013
	16QAM		H	3.39	6.08	12.71	10.03	0.010
15	QPSK		H	3.39	6.08	13.40	10.71	0.012
	16QAM		H	3.39	6.08	12.27	9.58	0.009


Note.

1. $E.R.P(dBm) = \text{Substitute Level}(dB) + \text{Antenna gain}(dBd) - C.L(\text{Cable loss})(dB)$


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

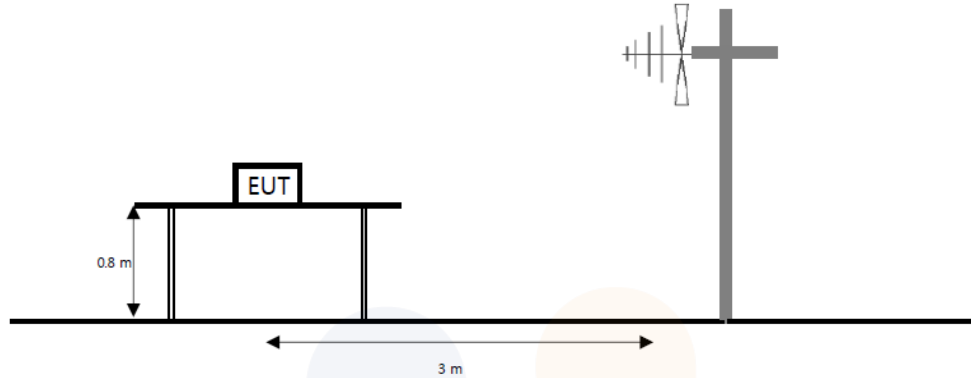

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

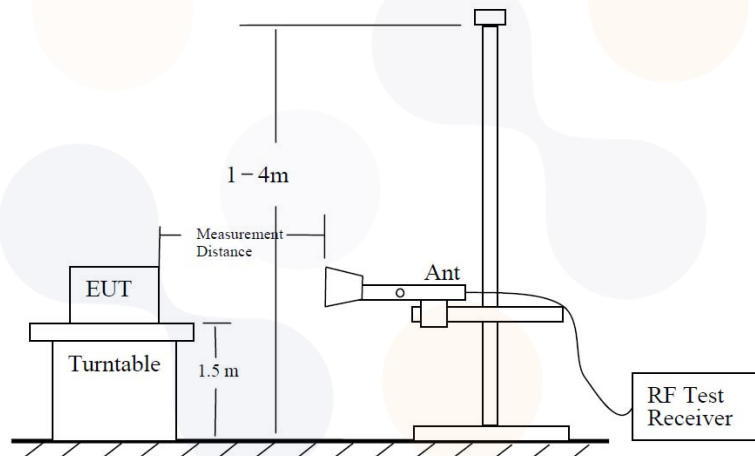

The diagram below shows the test setup for substituted method.

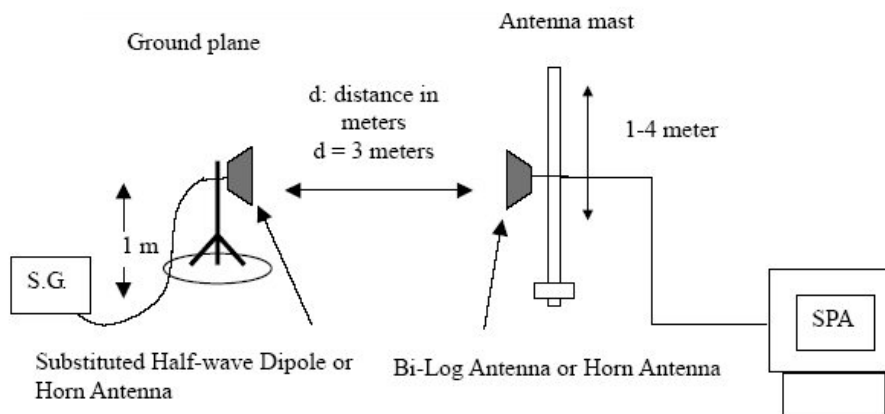

Limit

According to §90.543(e),

for operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10\log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10\log(P)$ dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

According to §90.543(f),

for operations in the 758-775 MHz and the 788-805 MHz bands, all emissions including harmonics in the band 1559 – 1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §90.691(a),

Out-of-band emission requirement shall apply only to the “outer” channels Included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0027 Page (65) of (68)	
--	---	---

Test procedure

971168 D01 v03r01 - Section 6.2

ANSI 63.26-2015 – Section 5.5

ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 1 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Test results (Above 1 000 MHz)

Test mode : LTE B14

Frequency(MHz) : 790.5

Channel : 23305

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 575.62	H	5.97	8.42	-51.65	-54.10	-40.00	14.10
	2 363.35	V	5.64	10.45	-41.99	-46.80	-13.00	33.80
	3 150.26	H	7.60	12.15	-37.65	-42.20	-13.00	29.20
	3 939.64	V	9.09	13.64	-35.25	-39.80	-13.00	26.80

Test mode : LTE B14

Frequency(MHz) : 793

Channel : 23300

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 582.18	V	5.95	8.44	-51.01	-53.50	-40.00	13.50
	2 369.10	V	5.66	10.46	-42.10	-46.90	-13.00	33.90
	3 165.03	H	7.63	12.18	-39.25	-43.80	-13.00	30.80
	3 954.41	V	9.12	13.91	-33.61	-38.40	-13.00	25.40

Test mode : LTE B14

Frequency(MHz) : 795.5

Channel : 23355

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 587.93	V	5.94	8.45	-53.39	-55.90	-40.00	15.90
	2 377.30	V	5.68	10.48	-42.80	-47.60	-13.00	34.60
	3 172.83	H	7.65	12.20	-40.35	-44.90	-13.00	31.90
	3 965.90	V	9.14	13.93	-34.81	-39.60	-13.00	26.60

Note.

- For the range 1 559 ~ 1 610 MHz, Limit Calculation(dBm)= 43 + 10log(P_[Watts])
 Limit Calculation of wide-band (dBm/MHz) = -70 dBW/MHz (-40 dBm/MHz)
 Limit Calculation of narrow-band (dBm) = -80 dBW (-50 dBm)
- E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)

Test mode : LTE B26

Frequency(MHz) : 819

Channel : 26740

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 637.57	H	5.79	8.64	-51.25	-54.10	-13.00	41.10
	2 457.72	H	5.89	10.62	-42.67	-47.40	-13.00	34.40
	3 276.63	H	7.85	12.43	-39.42	-44.00	-13.00	31.00
	4 097.18	V	9.28	13.96	-36.72	-41.40	-13.00	28.40

Test mode : LTE B26

Frequency(MHz) : 824

Channel : 26790

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 658.91	V	5.72	8.62	-50.90	-53.80	-13.00	40.80
	2 488.90	H	5.97	10.68	-41.39	-46.10	-13.00	33.10
	3 314.38	V	7.93	12.51	-37.62	-42.20	-13.00	29.20
	4 148.06	V	9.32	14.14	-35.68	-40.50	-13.00	27.50

Note.

1. $E.I.R.P(dBm) = \text{Substitute Level}(dB) + \text{Antenna gain}(dBi) - C.L(\text{Cable loss}) (dB)$

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV40-N	101462	24.10.12
Signal Generator	R&S	SMB100A	176206	25.01.18
DC Power Supply	AGILENT	E3632A	KR75304571	24.04.27
Divider	Marki Microwave, Inc.	PD-0040	D0006	24.07.04
Wideband Radio Communication Tester	R&S	CMW500	132120	24.04.25
Temp & Humid Chamber	Myeongseong R&P	CTHC-50P-DT	20150824-2	25.01.18
Spectrum Analyzer	AGILENT	N9040B	US55230151	24.07.03
Wideband Radio Communication Tester	R&S	CMW500	141780	25.01.18
Bilog Antenna	Teseq GmbH	CBL 6112D	62027	24.11.17
Bilog Antenna	ETS-LINDGREN	3143B	00228420	25.07.20
Horn Antenna	ETS-LINDGREN	3117	00251528	25.01.26
Horn Antenna	ETS-LINDGREN	3117	00227509	24.07.12
Horn Antenna	ETS-LINDGREN	3116	00086635	25.01.25
Horn Antenna	ETS-LINDGREN	3116C	00251516	25.02.01
Amplifier	SONOMA INSTRUMENT	310N	421822	24.10.12
Amplifier	C&K Technologies, Inc.	BZR-00504000-551028-252525	27736	24.07.04
Amplifier	C&K Technologies, Inc.	BZRT-00504000-481055-382525	26299-27735	24.07.04
High Pass Filter	Wainwright Instruments GmbH	WHKX10-900-1000-15000-40SS	11	24.07.04
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	32	24.07.04

End of test report