

TEST REPORT

FCC 2G3G Test for SM-S731B/DS
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2507-FC057

DATE OF ISSUE
July 15, 2025

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2507-FC057

DATE OF ISSUE

July 15, 2025

Additional Model

SM-S731B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-S731B/DS

Date of Test

June 05, 2025 ~ July 11, 2025

FCC ID

A3LSMS731B

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 22, § 24, § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 15, 2025	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION.....	7
2.1. DESCRIPTION OF EUT.....	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS.....	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(CONDUCTED TEST).....	18
3.10 WORST CASE(RADIATED TEST)	19
4. LIST OF TEST EQUIPMENT.....	21
5. MEASUREMENT UNCERTAINTY.....	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA(Main 1 ANT).....	26
8.1 EFFECTIVE RADIATED POWER.....	26
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS.....	28
8.4 PEAK-TO-AVERAGE RATIO	33
8.5 OCCUPIED BANDWIDTH.....	34
8.6 CONDUCTED SPURIOUS EMISSIONS	35
8.7 BAND EDGE	35
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	36
9. TEST DATA(Sub 1 ANT)	47
9.1 EFFECTIVE RADIATED POWER.....	47
9.2 RADIATED SPURIOUS EMISSIONS.....	48
9.3 PEAK-TO-AVERAGE RATIO	50
9.4 OCCUPIED BANDWIDTH.....	51
9.5 CONDUCTED SPURIOUS EMISSIONS	52
9.7 BAND EDGE	52
9.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	53
10. TEST PLOTS(Main 1 ANT).....	55
11. TEST PLOTS(Sub 1 ANT)	144
12. ANNEX A_ TEST SETUP PHOTO	177

MEASUREMENT REPORT

1. GENERAL INFORMATION

Model(s):	SM-S731B/DS
Additional Model(s)	SM-S731B
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
Serial number:	Radiated : R3CY40QLLEZ Conducted : R3CY40QL2FR (GSM850 & WCDMA850_Main 1 ANT, WCDMA1700) R3CY40QLBND (GSM850 & WCDMA850_Sub 1 ANT, GSM1900, WCDMA1900)
Antenna Information	Please refer to the Antenna Specification document.

1.1 MAXIMUM OUTPUT POWER

Main 1 ANT

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	251KGXW	0.583	27.66
GSM850 EDGE			247KG7W	0.103	20.12
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.065	18.12

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	246KGXW	1.242	30.94
GSM1900 EDGE			251KG7W	0.348	25.42
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M17F9W	0.244	23.87
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M20F9W	0.223	23.48

Sub 1 ANT

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	247KGXW	0.467	26.69
GSM850 EDGE			250KG7W	0.085	19.31
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M18F9W	0.065	18.14

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: : P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

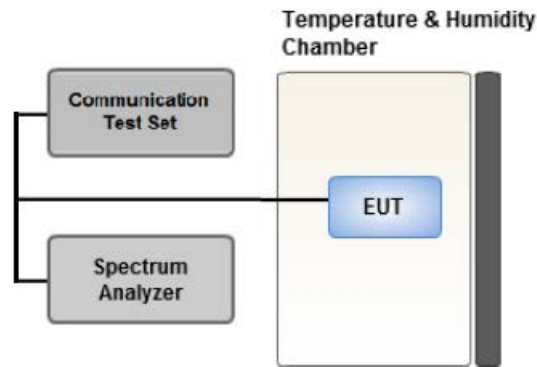

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{pk} .
 Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

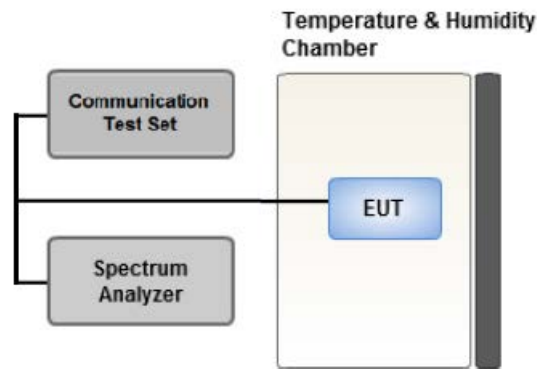

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

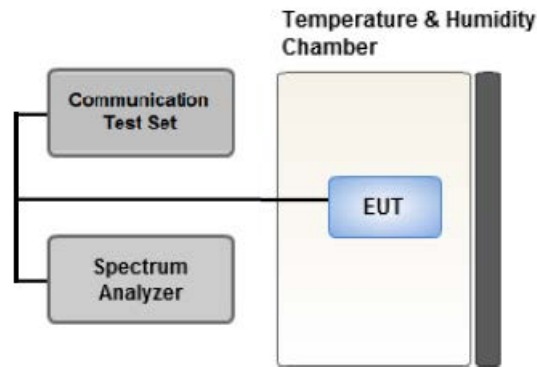

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

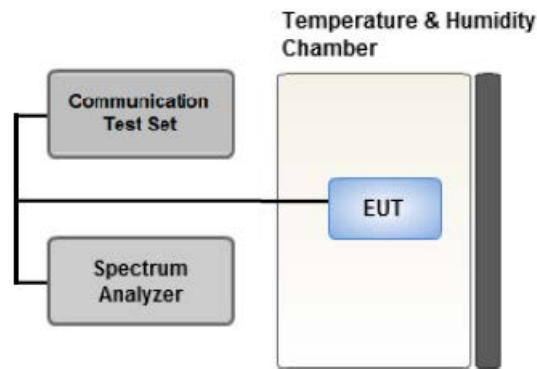

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep Time > (Number of Points) (Symbol Period)
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

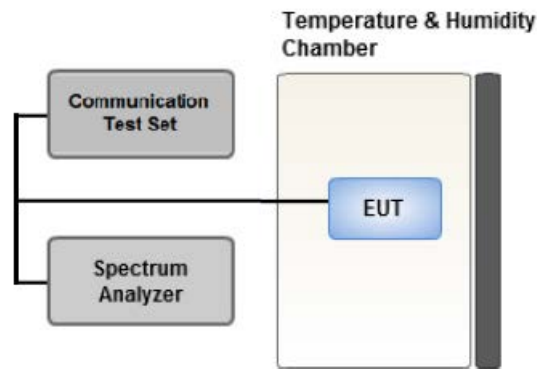

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-S731B/DS & additional models were tested and the worst case results are reported.
- (Worst case : SM-S731B/DS)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Peak-To-Average Ratio	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Mid
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	Uplink Channel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-S731B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-S731B/DS)

[Main 1 ANT Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : Z WCDMA B5 : Y	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Y WCDMA B4 : X WCDMA B5 : Z	Low, Mid, High

[Main 1 ANT Worst case_2G]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : Y GSM1900 : Z	Low, Mid, High
	EDGE (1 TX Slot)	GSM850 : Y GSM1900 : Z	GSM 850 : Low GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Z GSM1900 : Y	Low, Mid, High

[Sub 1 ANT Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power,	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B5 : Z	Low, Mid, High

[Sub 1 ANT Worst case_2G]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power,	Voice	GSM850 : X	Low, Mid, High
	EDGE (1 TX Slot)	GSM850 : X	GSM 850 : Low
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Z	Low, Mid, High

[Test Channel]

	UplinkChannel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.	F1L7	11/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/11/2026	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/14/2026	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/10/2026	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/14/2026	Annual
Signal Analyzer(2 Hz ~ 50.0 GHz)	N9040B	KEYSIGHT	US55230216	12/09/2025	Annual
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>Note1</u>
Peak- to- Average Ratio	§ 22.913(d), § 24.232(d), § 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS
	§ 24.235, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§ 24.232(c), § 27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-23.51	38.79	-9.95	1.44	V	< 7.00	0.550	27.40
	190	836.6	-23.53	38.88	-9.95	1.45	V		0.560	27.48
	251	848.8	-23.78	38.96	-9.85	1.45	V		0.583	27.66
EDGE	251	848.8	-31.32	31.42	-9.85	1.45	V		0.103	20.12

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-32.90	29.51	-9.95	1.44	V	< 7.00	0.065	18.12
	4183	836.6	-33.26	29.15	-9.95	1.45	V		0.060	17.75
	4233	846.6	-33.37	29.39	-9.85	1.45	V		0.064	18.09

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-12.87	21.65	10.40	2.07	V	< 2.00	0.995	29.98
	661	1880.0	-12.20	22.75	10.40	2.21	V		1.242	30.94
	810	1909.8	-13.22	21.72	10.40	2.17	V		0.989	29.95
EDGE	661	1880.0	-17.72	17.23	10.40	2.21	V		0.348	25.42

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-19.65	14.87	10.40	2.07	V	< 2.00	0.209	23.20
	9400	1880.0	-19.27	15.68	10.40	2.21	V		0.244	23.87
	9538	1907.6	-19.99	14.95	10.40	2.17	V		0.208	23.18

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-17.87	15.50	10.04	2.06	V	< 1.00	0.223	23.48
	1412	1732.4	-18.08	15.36	10.12	2.08	V		0.219	23.40
	1513	1752.6	-18.21	15.32	10.21	2.08	V		0.221	23.45

8.3 RADIATED SPURIOUS EMISSIONS

■ MODULATION SIGNAL: GSM850
 ■ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-31.60	9.58	-56.28	2.02	V	-48.72	-13.00
	2 472.60	-21.79	10.30	-42.58	2.57	H	-34.85	-13.00
	3 296.80	-38.80	12.13	-58.33	2.95	H	-49.15	-13.00
190 (836.6)	1 673.20	-33.70	9.72	-58.66	2.05	V	-50.99	-13.00
	2 509.80	-22.17	10.59	-42.70	2.51	H	-34.62	-13.00
	3 346.40	-40.77	12.37	-60.78	2.96	H	-51.37	-13.00
251 (848.8)	1 697.60	-28.48	9.88	-53.28	2.07	H	-45.47	-13.00
	2 546.40	-21.27	10.66	-41.83	2.53	V	-33.70	-13.00
	3 395.20	-41.37	12.50	-61.34	2.98	H	-51.82	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-43.10	12.29	-60.21	3.07	V	-50.99	-13.00
	5 550.60	-43.45	13.03	-55.67	3.89	H	-46.53	-13.00
	7 400.80	-44.15	10.80	-47.04	4.58	H	-40.82	-13.00
661 (1880.0)	3 760.00	-43.19	12.22	-58.80	3.12	H	-49.70	-13.00
	5 640.00	-43.20	13.12	-55.64	3.92	V	-46.44	-13.00
	7 520.00	-43.14	10.82	-45.79	4.61	H	-39.58	-13.00
810 (1909.8)	3 819.60	-42.48	12.16	-59.13	3.19	H	-50.16	-13.00
	5 729.40	-44.01	13.04	-56.28	4.00	V	-47.24	-13.00
	7 639.20	-44.38	11.21	-47.21	4.68	H	-40.68	-13.00

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4132 (826.4)	1 652.80	-41.26	9.61	-66.03	2.02	V	-58.44	-13.00
	2 479.20	-40.27	10.34	-61.07	2.55	V	-53.28	-13.00
	3 305.60	-42.14	12.18	-61.75	2.97	H	-52.54	-13.00
4183 (836.6)	1 673.20	-40.96	9.72	-65.92	2.05	V	-58.25	-13.00
	2 509.80	-40.99	10.59	-61.52	2.51	V	-53.44	-13.00
	3 346.40	-42.82	12.37	-62.83	2.96	V	-53.42	-13.00
4233 (846.6)	1 693.20	-40.76	9.85	-65.60	2.07	V	-57.82	-13.00
	2 539.80	-38.94	10.67	-59.46	2.53	H	-51.32	-13.00
	3 386.40	-43.17	12.52	-63.15	2.99	H	-53.62	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-41.04	12.28	-58.17	3.08	V	-48.97	-13.00
	5 557.20	-43.17	13.03	-55.27	3.88	V	-46.12	-13.00
	7 409.60	-42.38	10.79	-45.19	4.57	H	-38.97	-13.00
9400 (1880.0)	3 760.00	-42.46	12.22	-58.07	3.12	V	-48.97	-13.00
	5 640.00	-42.61	13.12	-55.05	3.92	H	-45.85	-13.00
	7 520.00	-43.84	10.82	-46.49	4.61	V	-40.28	-13.00
9538 (1907.6)	3 815.20	-41.99	12.16	-58.43	3.20	H	-49.47	-13.00
	5 722.80	-42.50	13.05	-54.87	4.00	V	-45.82	-13.00
	7 630.40	-44.41	11.18	-47.21	4.66	V	-40.69	-13.00

MODULATION SIGNAL: WCDMA1700

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-42.63	12.43	-61.54	2.99	V	-52.10	-13.00
	5 137.20	-42.56	12.33	-55.13	3.81	H	-46.61	-13.00
	6 849.60	-43.88	11.90	-50.98	4.36	H	-43.44	-13.00
1412 (1732.4)	3 464.80	-42.81	12.34	-61.26	3.02	V	-51.94	-13.00
	5 197.20	-44.41	12.60	-57.37	3.79	H	-48.56	-13.00
	6 929.60	-43.73	11.65	-50.55	4.40	H	-43.30	-13.00
1513 (1752.6)	3 505.20	-42.28	12.34	-60.24	3.05	V	-50.95	-13.00
	5 257.80	-43.45	12.99	-55.82	3.79	H	-46.62	-13.00
	7 010.40	-42.69	11.26	-47.94	4.42	H	-41.10	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P_{Pk} (dBm)	Measured P_{Avg} (dBm)	P_{Avg} (Duty Cycle)			$P.A.R.$ $= P_{Pk} - P_{Avg}$ (dB)	Limit (dB)	Pass / Fail
				Tx_{Total} (ms)	Tx_{On} (ms)	Factor (dB)			
GSM1900	661	30.520	20.85	4.6160	0.5475	9.26	0.41	13	Pass
GSM1900 EDGE	661	28.978	16.07	4.6160	0.5475	9.26	3.64		
GSM850	190	CCDF Procedure					3.82		
GSM850 EDGE	190						6.44		
WCDMA850	4408						3.50		
WCDMA1900	9400						2.84		
WCDMA1700	1412						2.89		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 73 ~ 83.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), \quad X = Tx_{On} / Tx_{Total}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	251.38
	190	836.60	245.87
	251	848.80	241.38
GSM850 EDGE	128	824.20	247.12
	190	836.60	247.14
	251	848.80	244.32
GSM1900	512	1850.20	245.50
	661	1880.00	244.92
	810	1909.80	243.22
GSM1900 EDGE	512	1850.20	246.97
	661	1880.00	251.29
	810	1909.80	249.17
WCDMA850	4132	826.40	4.1603
	4183	836.60	4.1619
	4233	846.60	4.1596
WCDMA1900	9262	1852.40	4.1658
	9400	1880.00	4.1720
	9538	1907.60	4.1641
WCDMA1700	1312	1712.40	4.1971
	1412	1732.40	4.1626
	1513	1752.60	4.1637

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 56 ~ 72.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	Limit (dBm)
GSM850	128	3.1805	27.976	-58.322	-30.346	-13.00
	190	3.7189	27.976	-57.743	-29.767	
	251	3.6890	27.976	-57.555	-29.579	
GSM1900	512	19.2100	29.489	-53.008	-23.519	
	661	16.5700	29.489	-53.258	-23.769	
	810	18.8600	29.489	-52.944	-23.455	
WCDMA850	4132	3.7089	27.976	-65.962	-37.986	
	4183	3.0409	27.976	-65.874	-37.898	
	4233	2.5424	27.976	-66.840	-38.864	
WCDMA1900	9262	18.9300	29.489	-61.909	-32.420	
	9400	18.8900	29.489	-61.513	-32.024	
	9538	18.9300	29.489	-61.223	-31.734	
WCDMA1700	1312	18.6500	29.489	-61.874	-32.385	
	1412	19.1800	29.489	-61.139	-31.650	
	1513	18.5600	29.489	-61.472	-31.983	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 120 ~ 143.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 84 ~ 119.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	GSM850
OPERATING FREQUENCY:	836,600,000 Hz
CHANNEL:	190
REFERENCE VOLTAGE:	3.880 VDC
DEVIATION LIMIT:	$\pm 0.000\ 25\ \%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 599 993	0.0	0.000 000	0.0000
100 %		-30	836 599 986	-7.0	-0.000 001	-0.0084
100 %		-20	836 599 991	-2.7	0.000 000	-0.0033
100 %		-10	836 599 990	-3.4	0.000 000	-0.0040
100 %		0	836 600 004	10.4	0.000 001	0.0125
100 %		+10	836 599 990	-3.3	0.000 000	-0.0039
100 %		+30	836 599 988	-5.1	-0.000 001	-0.0061
100 %		+40	836 599 983	-10.5	-0.000 001	-0.0126
100 %		+50	836 599 988	-5.4	-0.000 001	-0.0064
Batt. Endpoint	3.300	+20	836 599 981	-12.1	-0.000 001	-0.0145

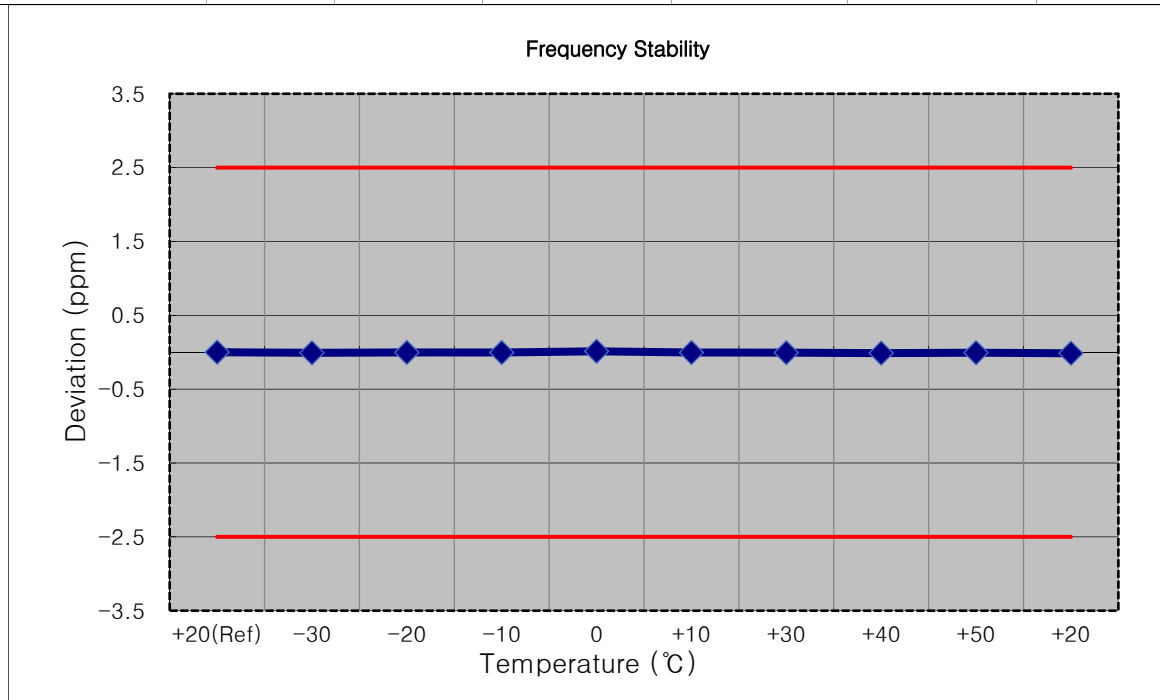


Mode: GSM1900
 OPERATING FREQUENCY: 1850,200,000 Hz
 CHANNEL: 512
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1850 200 024	0.0	0.000 000	0.0000
100 %		-30	1850 200 047	22.4	0.000 001	0.0121
100 %		-20	1850 200 048	23.2	0.000 001	0.0125
100 %		-10	1850 200 045	20.8	0.000 001	0.0112
100 %		0	1850 200 046	21.4	0.000 001	0.0116
100 %		+10	1850 200 045	20.5	0.000 001	0.0111
100 %		+30	1850 200 043	19.0	0.000 001	0.0103
100 %		+40	1850 200 042	18.0	0.000 001	0.0097
100 %		+50	1850 200 041	16.9	0.000 001	0.0091
Batt. Endpoint	3.300	+20	1850 200 043	18.9	0.000 001	0.0102

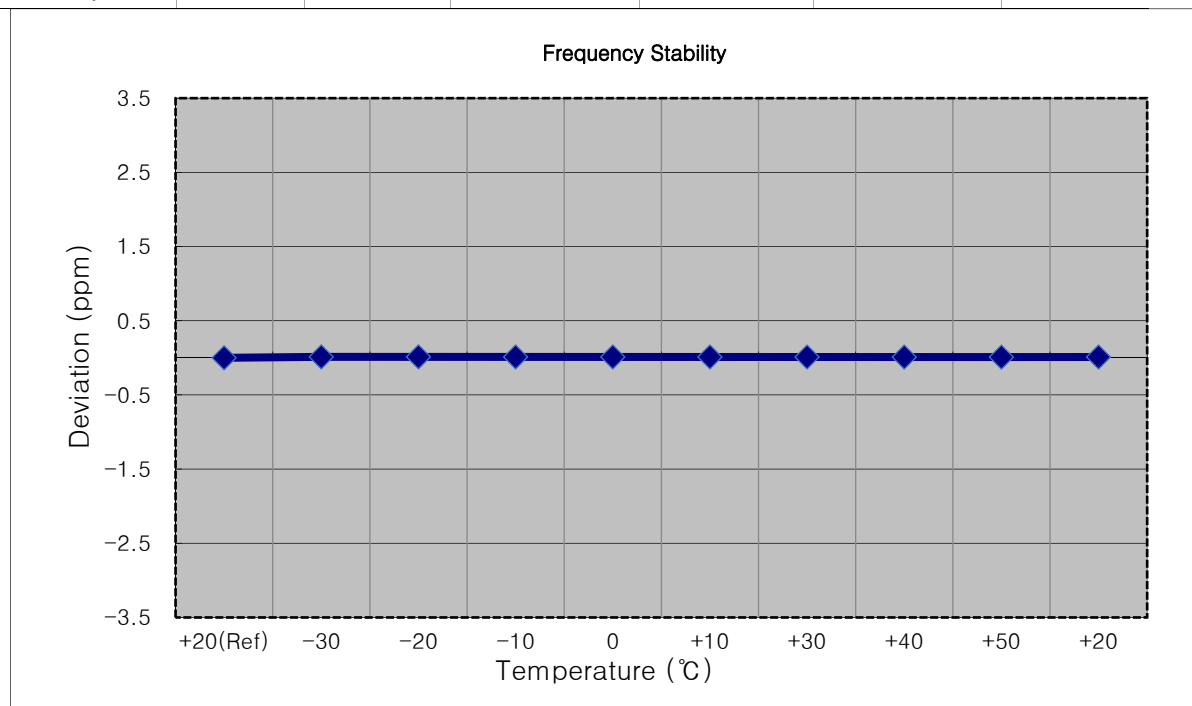


Mode: GSM1900
 OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 025	0.0	0.000 000	0.000
100 %		-30	1880 000 048	23.5	0.000 001	0.012
100 %		-20	1880 000 051	26.1	0.000 001	0.014
100 %		-10	1880 000 049	24.3	0.000 001	0.013
100 %		0	1880 000 048	23.2	0.000 001	0.012
100 %		+10	1880 000 049	24.1	0.000 001	0.013
100 %		+30	1880 000 049	23.8	0.000 001	0.013
100 %		+40	1880 000 046	21.4	0.000 001	0.011
100 %		+50	1880 000 046	21.2	0.000 001	0.011
Batt. Endpoint	3.300	+20	1880 000 046	20.6	0.000 001	0.011

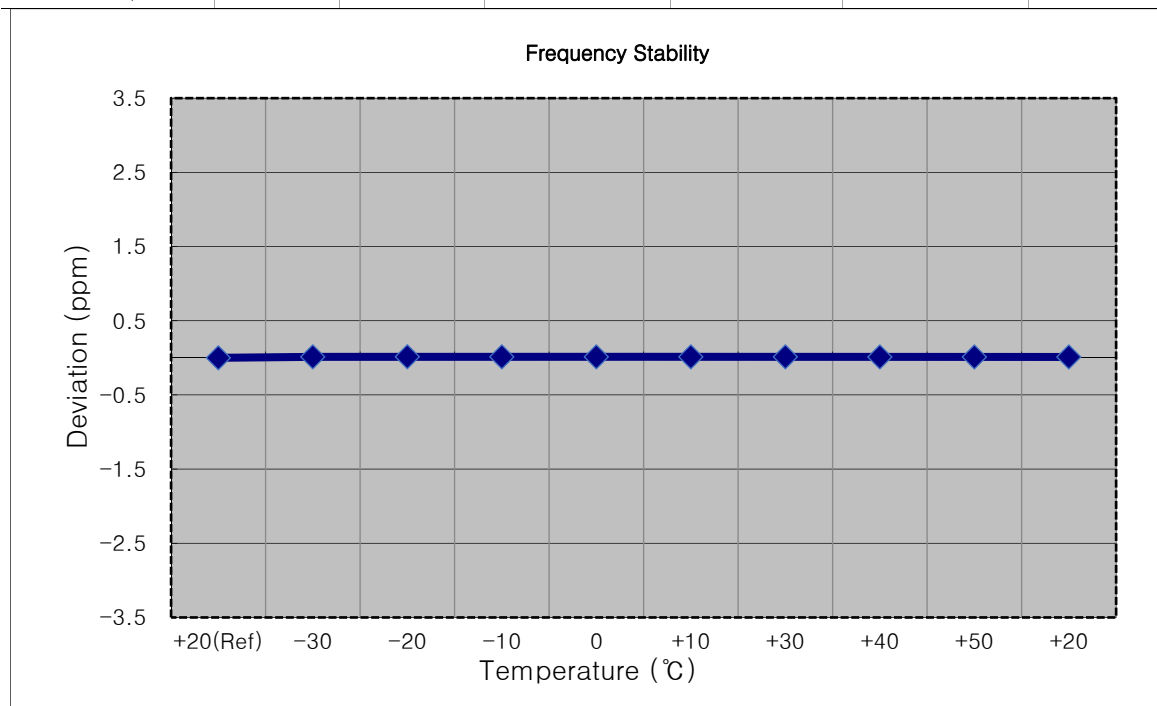


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1909 800 030	0.0	0.000 000	0.000
100 %		-30	1909 800 061	30.6	0.000 002	0.016
100 %		-20	1909 800 062	32.2	0.000 002	0.017
100 %		-10	1909 800 064	33.7	0.000 002	0.018
100 %		0	1909 800 043	12.7	0.000 001	0.007
100 %		+10	1909 800 044	13.4	0.000 001	0.007
100 %		+30	1909 800 044	14.1	0.000 001	0.007
100 %		+40	1909 800 043	13.3	0.000 001	0.007
100 %		+50	1909 800 044	13.7	0.000 001	0.007
Batt. Endpoint	3.300	+20	1909 800 043	13.1	0.000 001	0.007

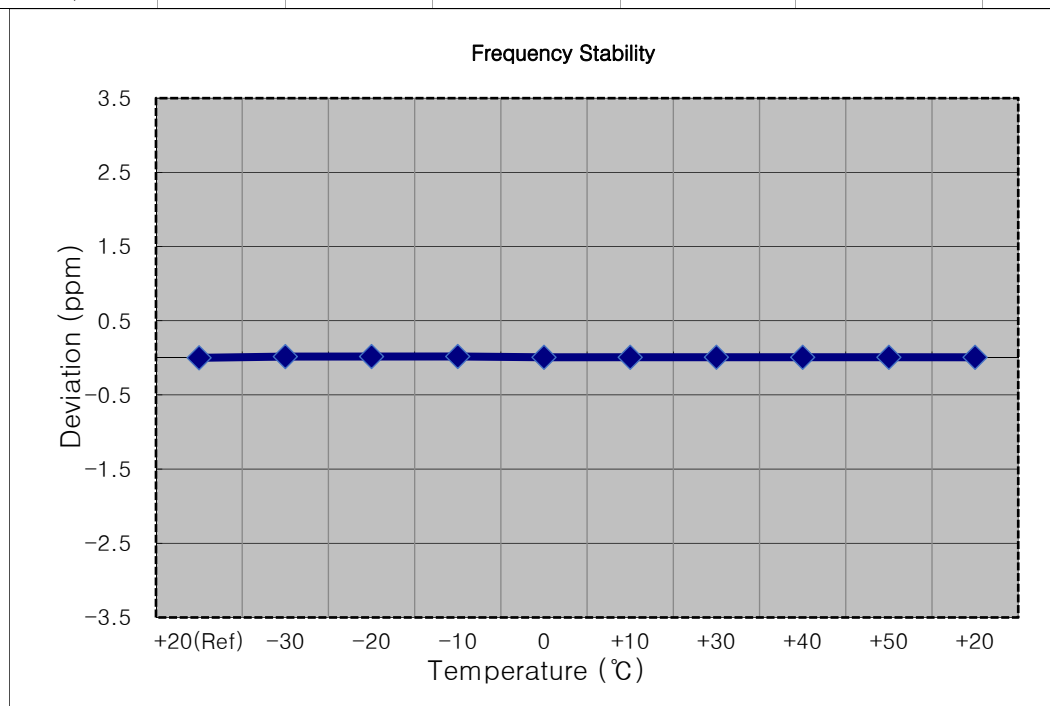


Mode: WCDMA850
 OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: $\pm 0.00025\%$ or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	836 599 999	0.0	0.000 000	0.0000
100 %		-30	836 599 996	-3.3	0.000 000	-0.0039
100 %		-20	836 599 998	-1.4	0.000 000	-0.0017
100 %		-10	836 599 998	-0.8	0.000 000	-0.0010
100 %		0	836 599 996	-3.0	0.000 000	-0.0036
100 %		+10	836 600 000	1.0	0.000 000	0.0012
100 %		+30	836 599 997	-1.7	0.000 000	-0.0021
100 %		+40	836 600 002	2.8	0.000 000	0.0033
100 %		+50	836 599 997	-1.5	0.000 000	-0.0018
Batt. Endpoint	3.300	+20	836 599 997	-1.5	0.000 000	-0.0018

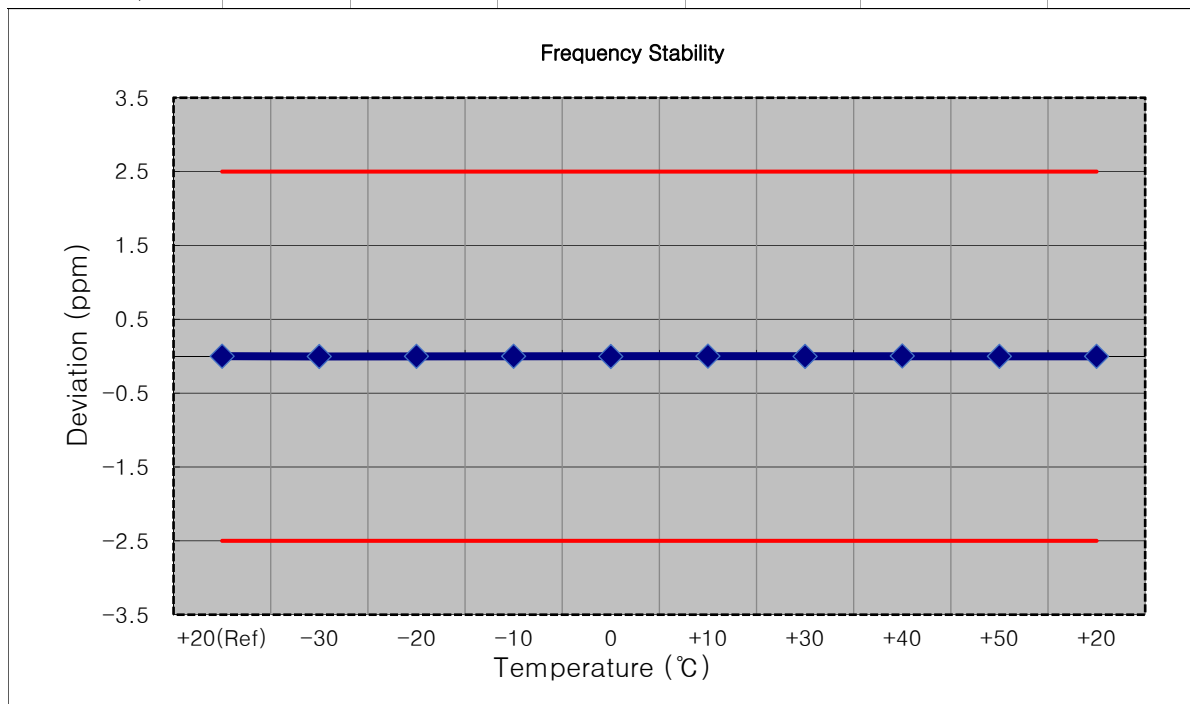


Mode: WCDMA1900
 OPERATING FREQUENCY: 1,852,400,000 Hz
 CHANNEL: 9262
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 399 992	0.0	0.000 000	0.0000
100 %		-30	1852 399 985	-7.4	0.000 000	-0.0040
100 %		-20	1852 399 977	-14.8	-0.000 001	-0.0080
100 %		-10	1852 399 983	-8.8	0.000 000	-0.0047
100 %		0	1852 399 983	-9.1	0.000 000	-0.0049
100 %		+10	1852 399 974	-18.6	-0.000 001	-0.0101
100 %		+30	1852 399 984	-8.4	0.000 000	-0.0046
100 %		+40	1852 399 983	-9.6	-0.000 001	-0.0052
100 %		+50	1852 399 985	-7.5	0.000 000	-0.0040
Batt. Endpoint	3.300	+20	1852 399 984	-7.9	0.000 000	-0.0042

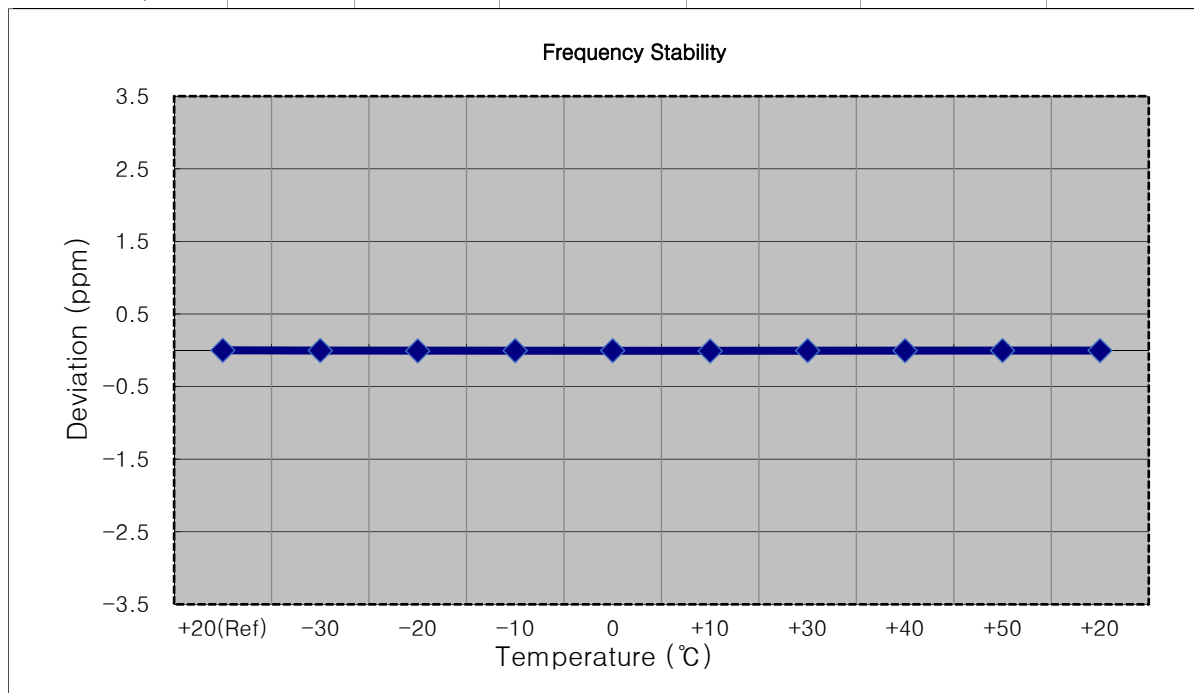


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1880 000 002	0.0	0.000 000	0.0000
100 %		-30	1880 000 000	-2.1	0.000 000	-0.0011
100 %		-20	1880 000 003	1.3	0.000 000	0.0007
100 %		-10	1880 000 005	2.9	0.000 000	0.0015
100 %		0	1880 000 000	-1.6	0.000 000	-0.0009
100 %		+10	1880 000 004	2.0	0.000 000	0.0011
100 %		+30	1880 000 000	-1.6	0.000 000	-0.0009
100 %		+40	1880 000 004	1.6	0.000 000	0.0009
100 %		+50	1880 000 000	-1.5	0.000 000	-0.0008
Batt. Endpoint	3.300	+20	1880 000 003	1.5	0.000 000	0.0008

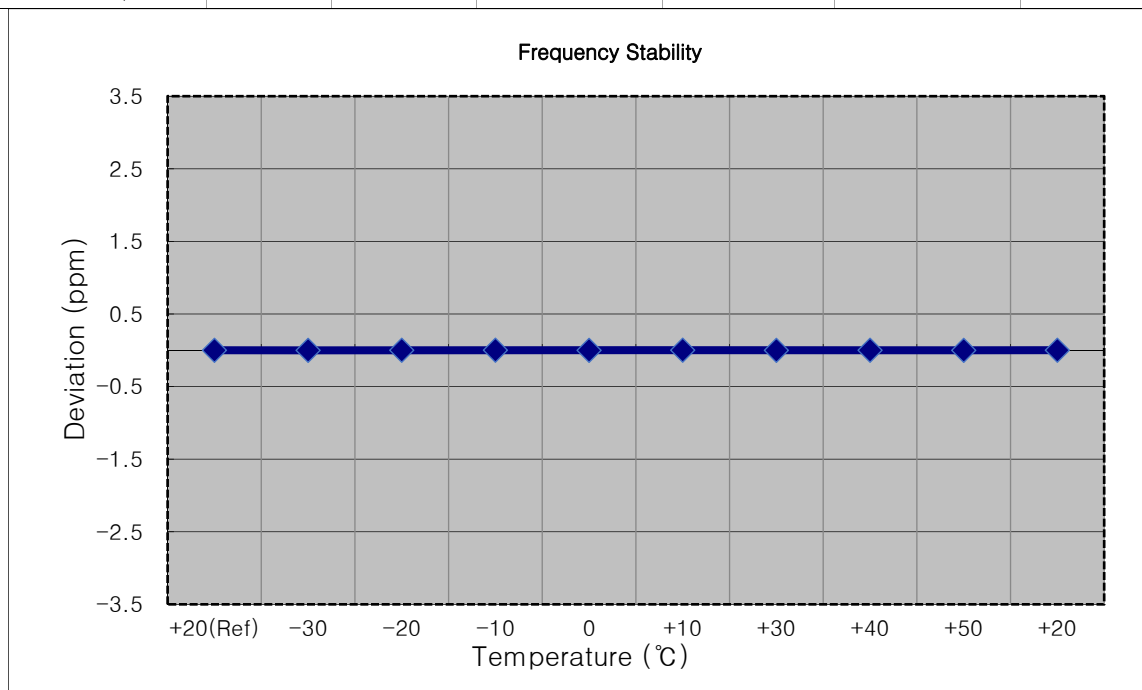


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1907 599 989	0.0	0.000 000	0.0000
100 %		-30	1907 599 983	-5.7	0.000 000	-0.0030
100 %		-20	1907 599 984	-5.0	0.000 000	-0.0026
100 %		-10	1907 599 985	-3.7	0.000 000	-0.0020
100 %		0	1907 599 982	-6.5	0.000 000	-0.0034
100 %		+10	1907 599 983	-6.0	0.000 000	-0.0032
100 %		+30	1907 599 983	-5.2	0.000 000	-0.0027
100 %		+40	1907 599 983	-5.3	0.000 000	-0.0028
100 %		+50	1907 599 983	-5.7	0.000 000	-0.0030
Batt. Endpoint	3.300	+20	1907 599 984	-5.0	0.000 000	-0.0026

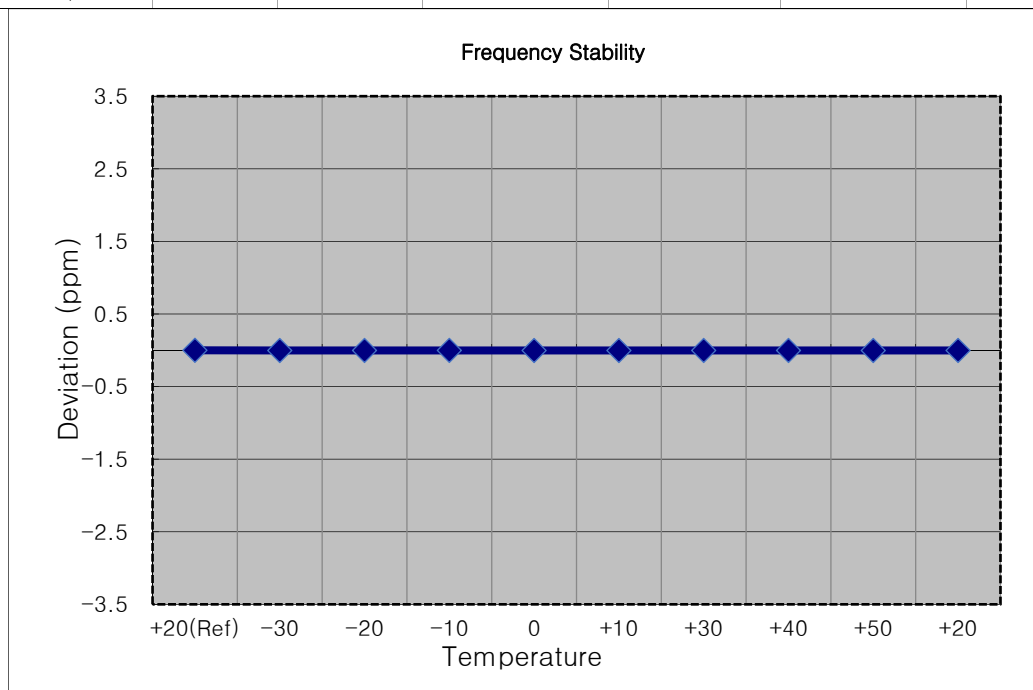


Mode:	WCDMA1700
OPERATING FREQUENCY:	1,712,400,000 Hz
CHANNEL:	1312
REFERENCE VOLTAGE:	3.880 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 399 999	0.0	0.000 000	0.0000
100 %		-30	1712 399 997	-2.0	0.000 000	-0.0012
100 %		-20	1712 399 995	-3.7	0.000 000	-0.0022
100 %		-10	1712 399 995	-4.1	0.000 000	-0.0024
100 %		0	1712 399 989	-9.9	-0.000 001	-0.0058
100 %		+10	1712 399 996	-2.7	0.000 000	-0.0016
100 %		+30	1712 399 998	-1.1	0.000 000	-0.0006
100 %		+40	1712 399 997	-2.3	0.000 000	-0.0013
100 %		+50	1712 399 996	-2.8	0.000 000	-0.0016
Batt. Endpoint	3.300	+20	1712 399 997	-1.9	0.000 000	-0.0011

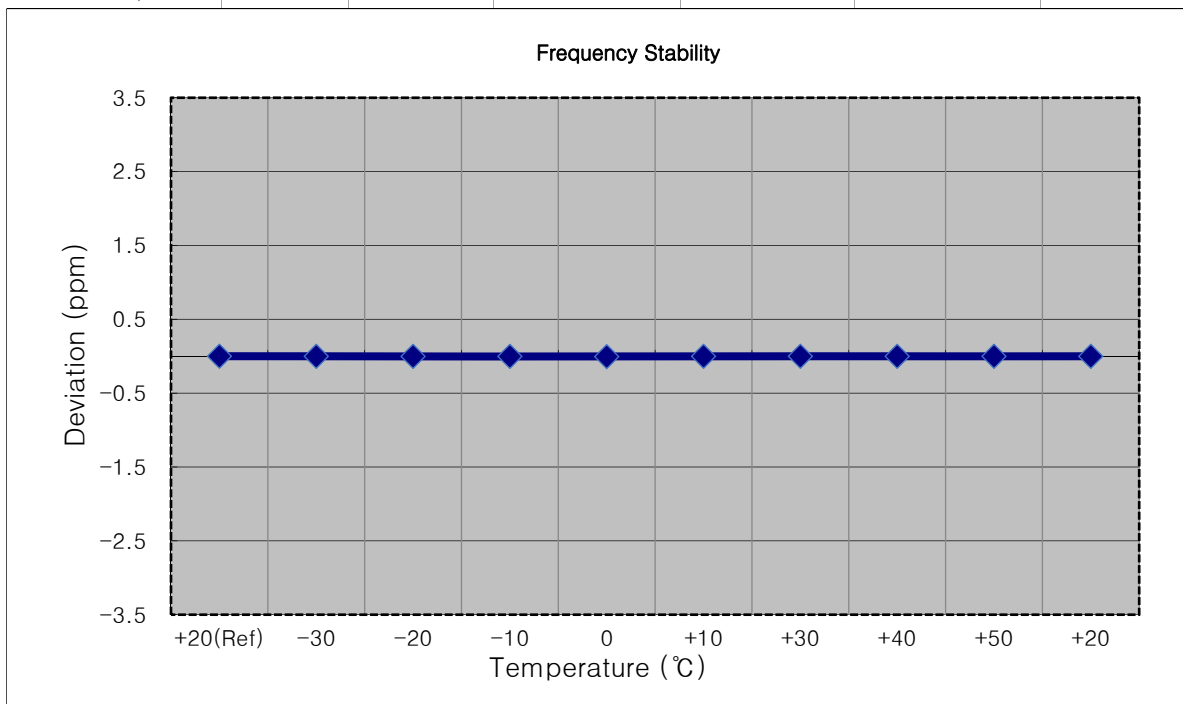


Mode: WCDMA1700
 OPERATING FREQUENCY: 1,732,400,000 Hz
 CHANNEL: 1412
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 399 987	0.0	0.000 000	0.0000
100 %		-30	1732 399 973	-14.2	-0.000 001	-0.0082
100 %		-20	1732 399 969	-18.4	-0.000 001	-0.0106
100 %		-10	1732 399 974	-13.5	-0.000 001	-0.0078
100 %		0	1732 399 966	-21.4	-0.000 001	-0.0124
100 %		+10	1732 399 965	-22.0	-0.000 001	-0.0127
100 %		+30	1732 399 971	-15.8	-0.000 001	-0.0091
100 %		+40	1732 399 972	-15.5	-0.000 001	-0.0089
100 %		+50	1732 399 970	-16.9	-0.000 001	-0.0098
Batt. Endpoint	3.300	+20	1732 399 973	-14.5	-0.000 001	-0.0084

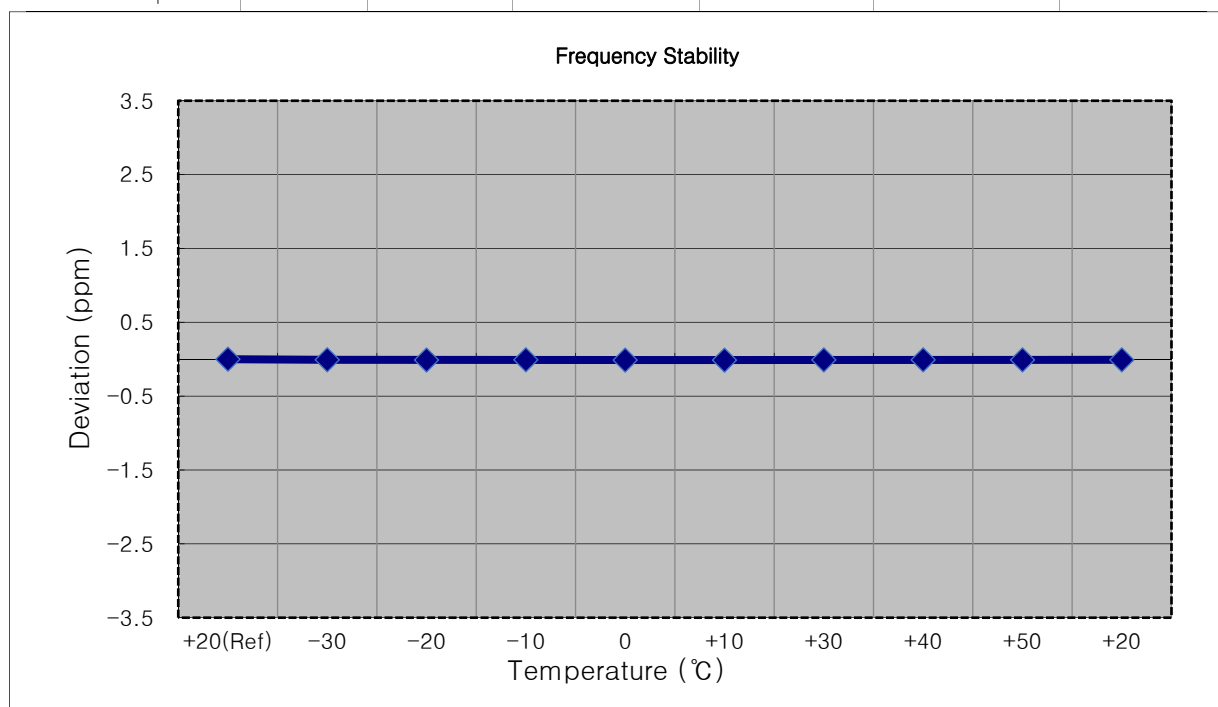

Mode:	WCDMA1700
OPERATING FREQUENCY:	1,752,600,000 Hz
CHANNEL:	1513
REFERENCE VOLTAGE:	3.880 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1752 599 988	0.0	0.000 000	0.0000
100 %		-30	1752 599 971	-17.7	-0.000 001	-0.0101
100 %		-20	1752 599 972	-16.1	-0.000 001	-0.0092
100 %		-10	1752 599 976	-12.4	-0.000 001	-0.0071
100 %		0	1752 599 975	-13.6	-0.000 001	-0.0077
100 %		+10	1752 599 976	-12.7	-0.000 001	-0.0073
100 %		+30	1752 599 963	-24.8	-0.000 001	-0.0142
100 %		+40	1752 599 971	-17.2	-0.000 001	-0.0098
100 %		+50	1752 599 977	-11.6	-0.000 001	-0.0066
Batt. Endpoint	3.300	+20	1752 599 966	-22.0	-0.000 001	-0.0126

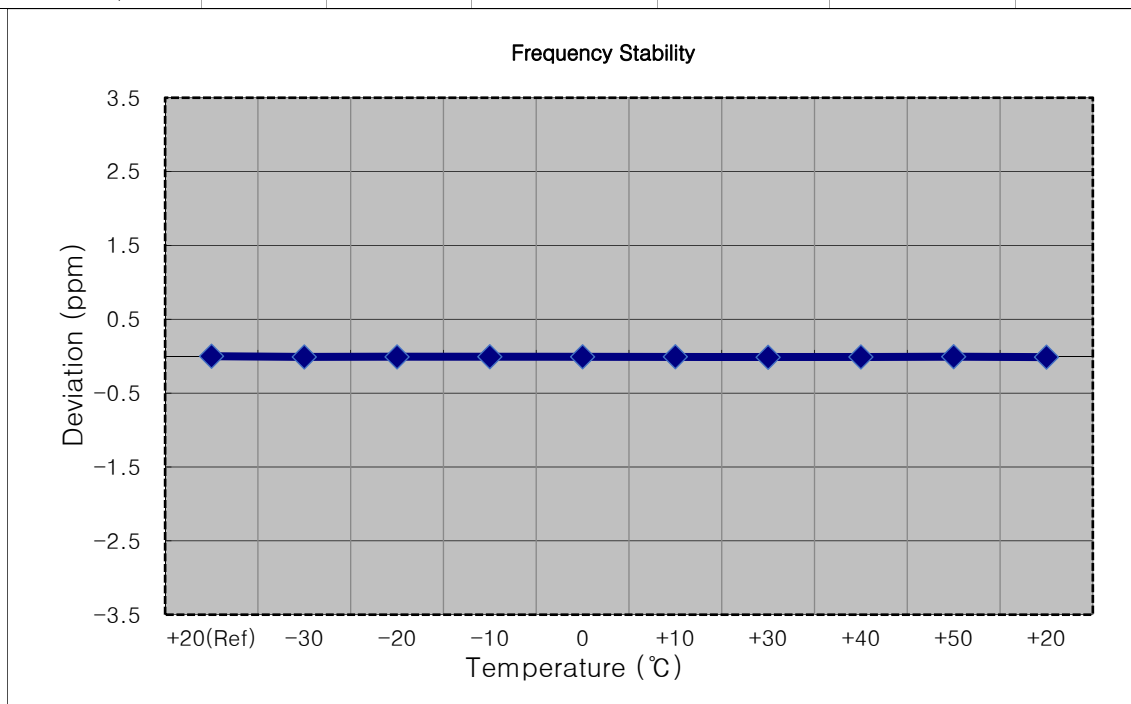

9. TEST DATA(Sub 1 ANT)

9.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-25.91	36.39	-9.95	1.44	H	< 7.00	0.316	25.00
	190	836.6	-24.32	38.09	-9.95	1.45	H		0.467	26.69
	251	848.8	-25.12	37.62	-9.85	1.45	H		0.429	26.32
EDGE	190	836.6	-31.70	30.71	-9.95	1.45	H		0.085	19.31

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-33.94	28.47	-9.95	1.44	H	< 7.00	0.051	17.08
	4183	836.6	-33.39	29.02	-9.95	1.45	H		0.058	17.62
	4233	846.6	-33.32	29.44	-9.85	1.45	H		0.065	18.14

9.2 RADIATED SPURIOUS EMISSIONS

■ MODULATION SIGNAL: GSM850
 ■ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-31.68	9.58	-56.36	2.02	V	-48.80	-13.00
	2 472.60	-22.50	10.30	-43.29	2.57	H	-35.56	-13.00
	3 296.80	-40.01	12.13	-59.54	2.95	H	-50.36	-13.00
190 (836.6)	1 673.20	-32.40	9.72	-57.36	2.05	V	-49.69	-13.00
	2 509.80	-22.36	10.59	-42.89	2.51	H	-34.81	-13.00
	3 346.40	-41.24	12.37	-61.25	2.96	H	-51.84	-13.00
251 (848.8)	1 697.60	-28.42	9.88	-53.22	2.07	V	-45.41	-13.00
	2 546.40	-22.35	10.66	-42.91	2.53	H	-34.78	-13.00
	3 395.20	-42.26	12.50	-62.23	2.98	V	-52.71	-13.00

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4132 (826.4)	1 652.80	-40.68	9.61	-65.45	2.02	V	-57.86	-13.00
	2 479.20	-38.18	10.34	-58.98	2.55	H	-51.19	-13.00
	3 305.60	-43.08	12.18	-62.69	2.97	H	-53.48	-13.00
4183 (836.6)	1 673.20	-41.00	9.72	-65.96	2.05	V	-58.29	-13.00
	2 509.80	-41.86	10.59	-62.39	2.51	H	-54.31	-13.00
	3 346.40	-43.34	12.37	-63.35	2.96	H	-53.94	-13.00
4233 (846.6)	1 693.20	-41.98	9.85	-66.82	2.07	H	-59.04	-13.00
	2 539.80	-40.27	10.67	-60.79	2.53	H	-52.65	-13.00
	3 386.40	-42.22	12.52	-62.20	2.99	V	-52.67	-13.00

9.3 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail	
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)				
GSM850	190	CCDF Procedure						3.85	13	Pass
GSM850 EDGE	190							6.33		
WCDMA850	4408							3.39		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 152 ~ 154.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), X = Tx_{On} / Tx_{Total}$$

9.4 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.2	246.58
	190	836.6	245.62
	251	848.8	245.63
GSM850 EDGE	128	824.2	243.27
	190	836.6	250.18
	251	848.8	245.69
WCDMA850	4132	826.4	4.1808
	4183	836.6	4.1448
	4233	846.6	4.1582

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 145 ~ 151.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	Limit (dBm)
GSM850	128	3.7189	27.976	-58.109	-30.133	-13.00
	190	3.1905	27.976	-58.443	-30.467	
	251	2.5424	27.976	-57.848	-29.872	
WCDMA850	4132	6.0020	28.591	-65.913	-37.322	
	4183	3.6691	27.976	-66.362	-38.386	
	4233	3.7089	27.976	-65.566	-37.590	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 171 ~ 176.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 155 ~ 170.

9.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ☐ MODE: GSM850
☐ OPERATING FREQUENCY: 836,600,000 Hz
☐ CHANNEL: 190
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: $\pm 0.000\ 25\ %$ or $2.5\ \text{ppm}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 599 994	0.0	0.000 000	0.0000
100 %		-30	836 599 981	-13.2	-0.000 002	-0.0158
100 %		-20	836 599 989	-5.0	-0.000 001	-0.0059
100 %		-10	836 599 990	-4.0	0.000 000	-0.0048
100 %		0	836 599 983	-10.8	-0.000 001	-0.0129
100 %		+10	836 599 991	-3.3	0.000 000	-0.0040
100 %		+30	836 599 991	-3.6	0.000 000	-0.0043
100 %		+40	836 599 984	-9.8	-0.000 001	-0.0118
100 %		+50	836 599 990	-3.9	0.000 000	-0.0046
Batt. Endpoint	3.300	+20	836 599 990	-3.7	0.000 000	-0.0044

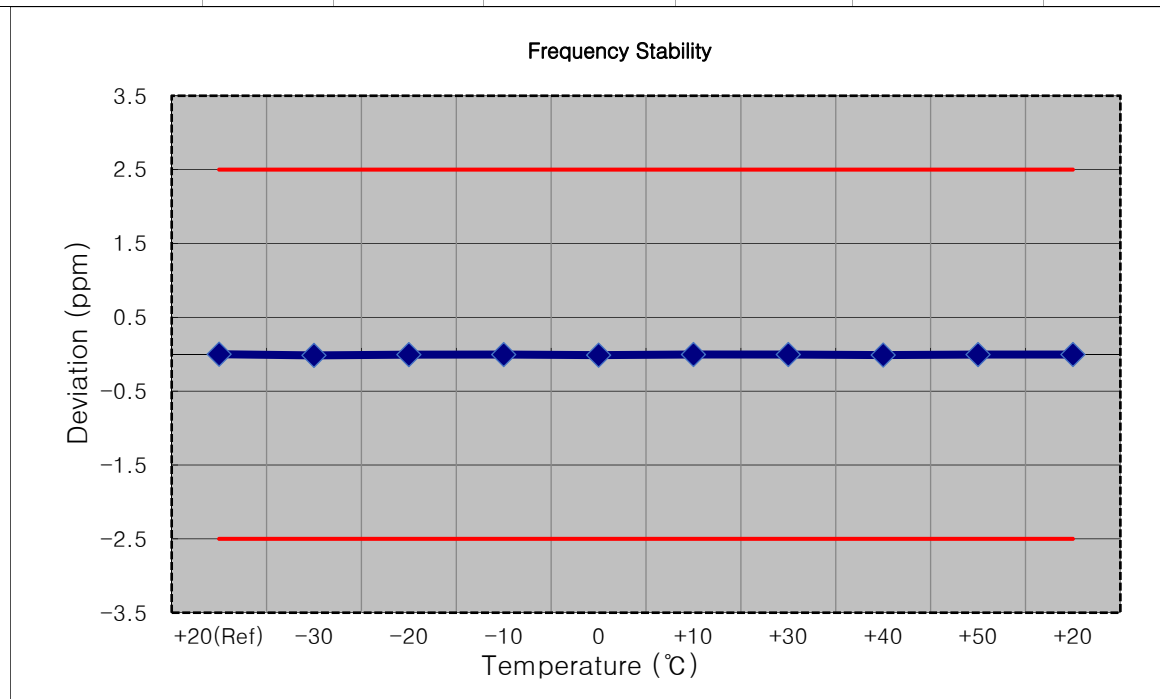


☐ Mode: WCDMA850
☐ OPERATING FREQUENCY: 836,600,000 Hz
☐ CHANNEL: 4183
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	836 600 003	0.0	0.000 000	0.0000
100 %		-30	836 600 006	2.7	0.000 000	0.0033
100 %		-20	836 600 005	2.6	0.000 000	0.0031
100 %		-10	836 600 007	3.7	0.000 000	0.0044
100 %		0	836 600 006	2.9	0.000 000	0.0035
100 %		+10	836 600 006	3.3	0.000 000	0.0040
100 %		+30	836 600 006	2.9	0.000 000	0.0035
100 %		+40	836 600 006	3.3	0.000 000	0.0040
100 %		+50	836 600 005	2.3	0.000 000	0.0027
Batt. Endpoint	3.300	+20	836 600 006	3.3	0.000 000	0.0040

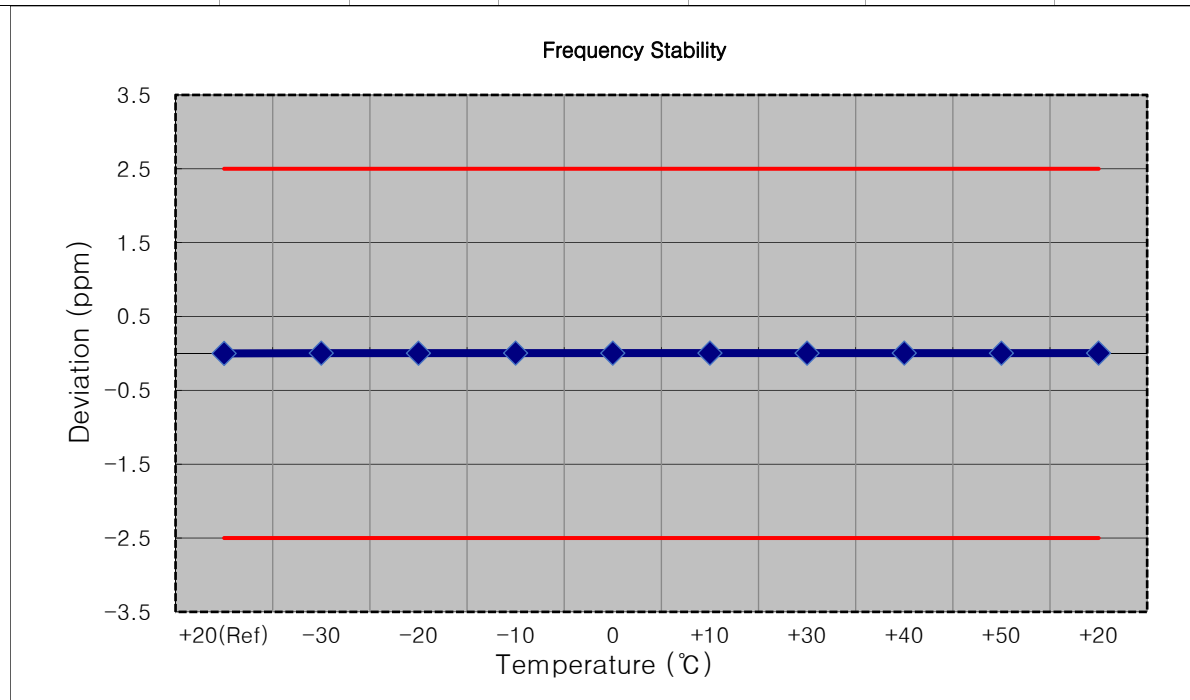


10. TEST PLOTS(Main 1 ANT)


■ GSM850 MODE (128 CH.) Occupied Bandwidth

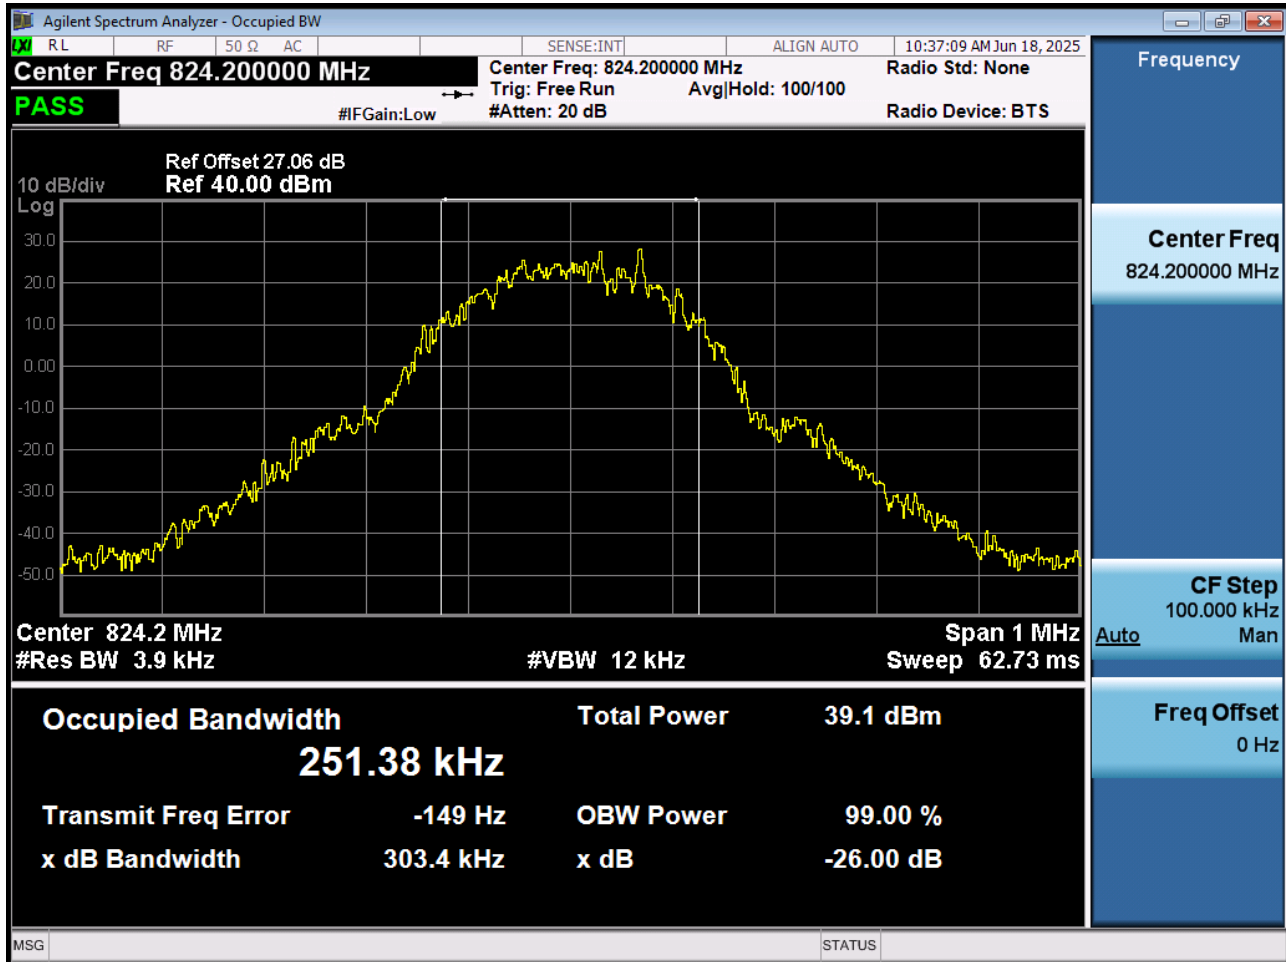


■ GSM850 MODE (190 CH.) Occupied Bandwidth

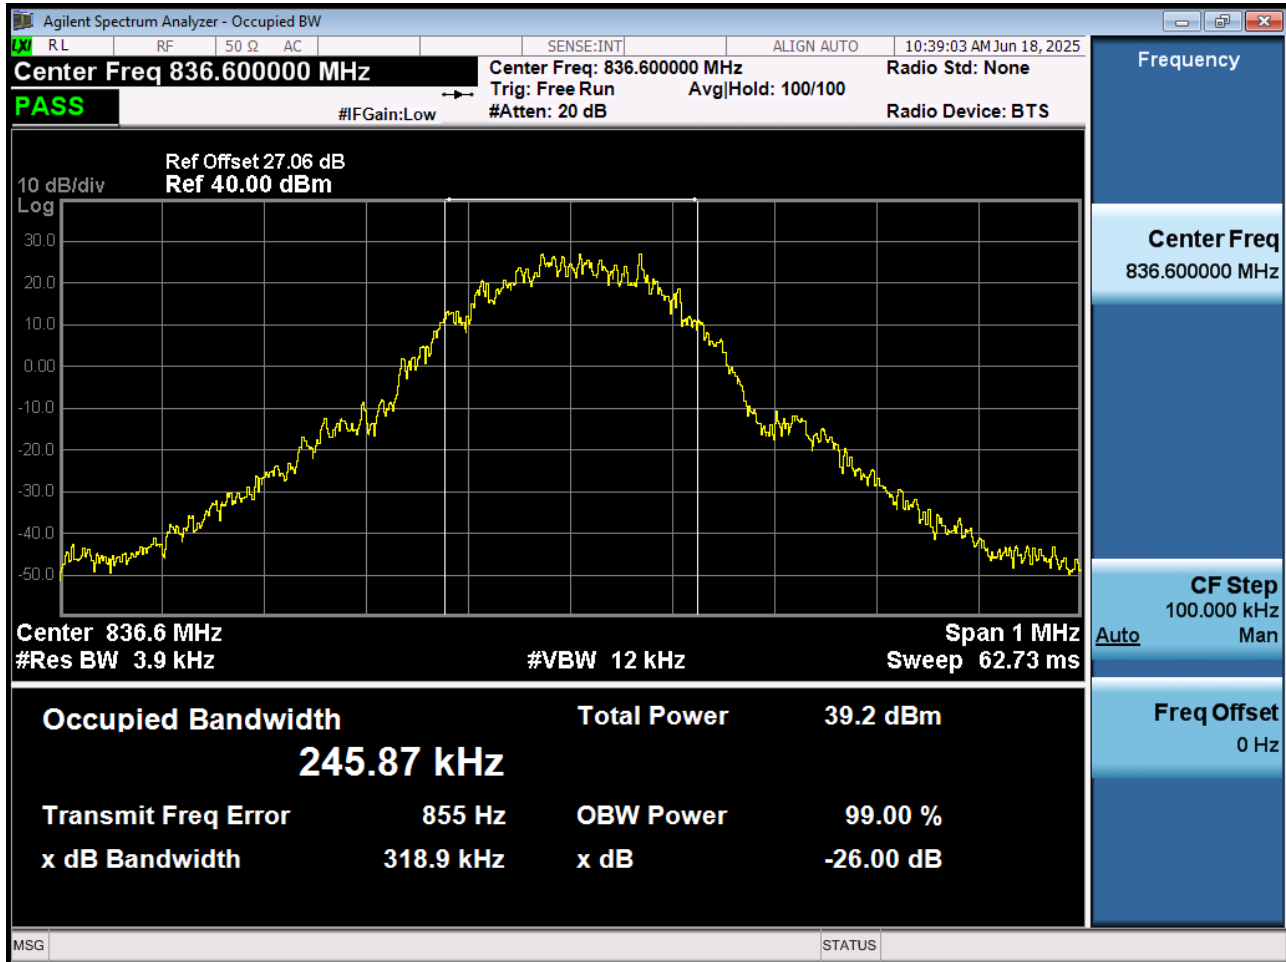


■ GSM850 MODE (251 CH.) Occupied Bandwidth

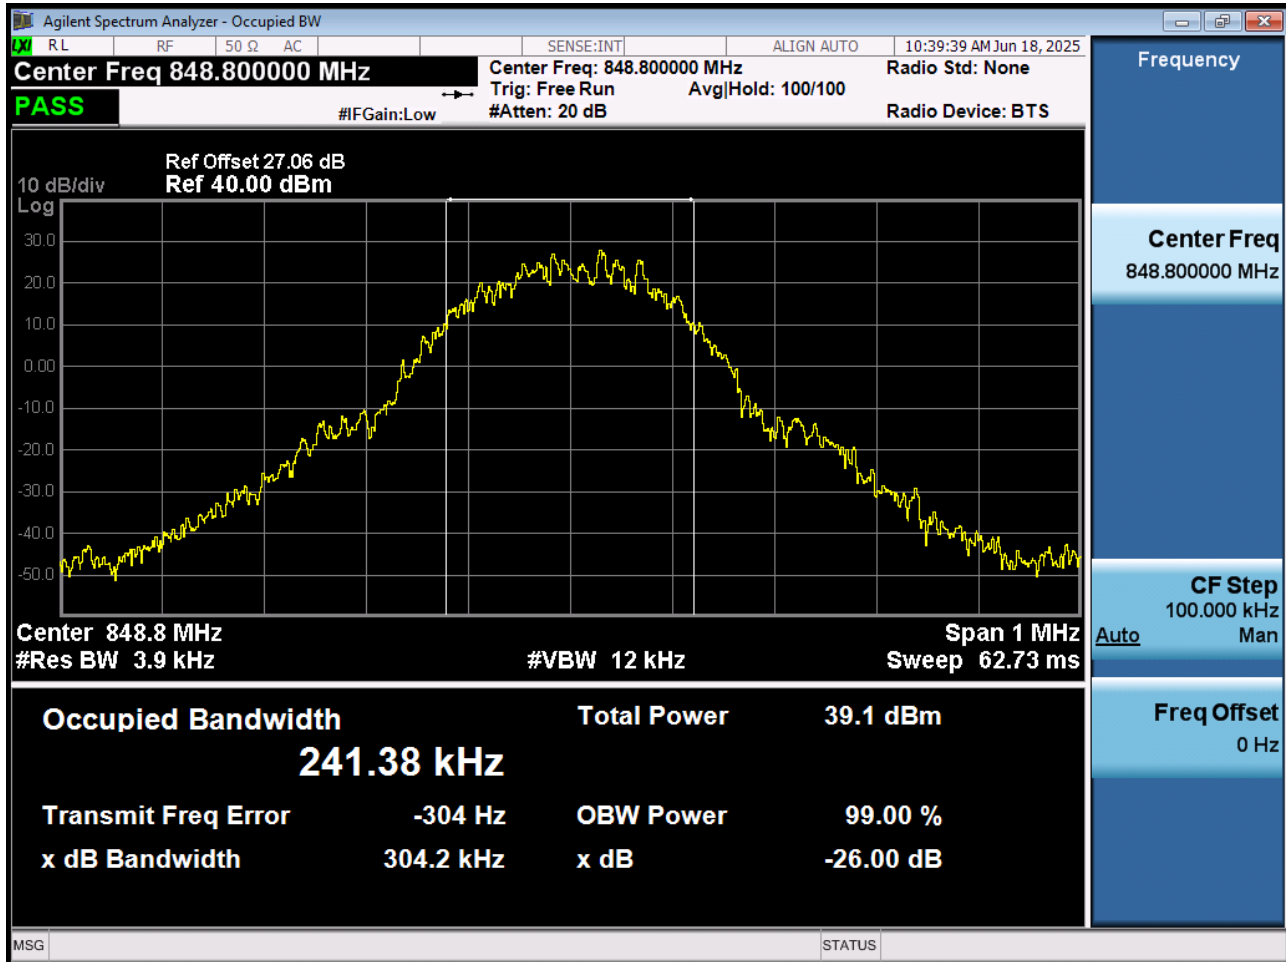


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

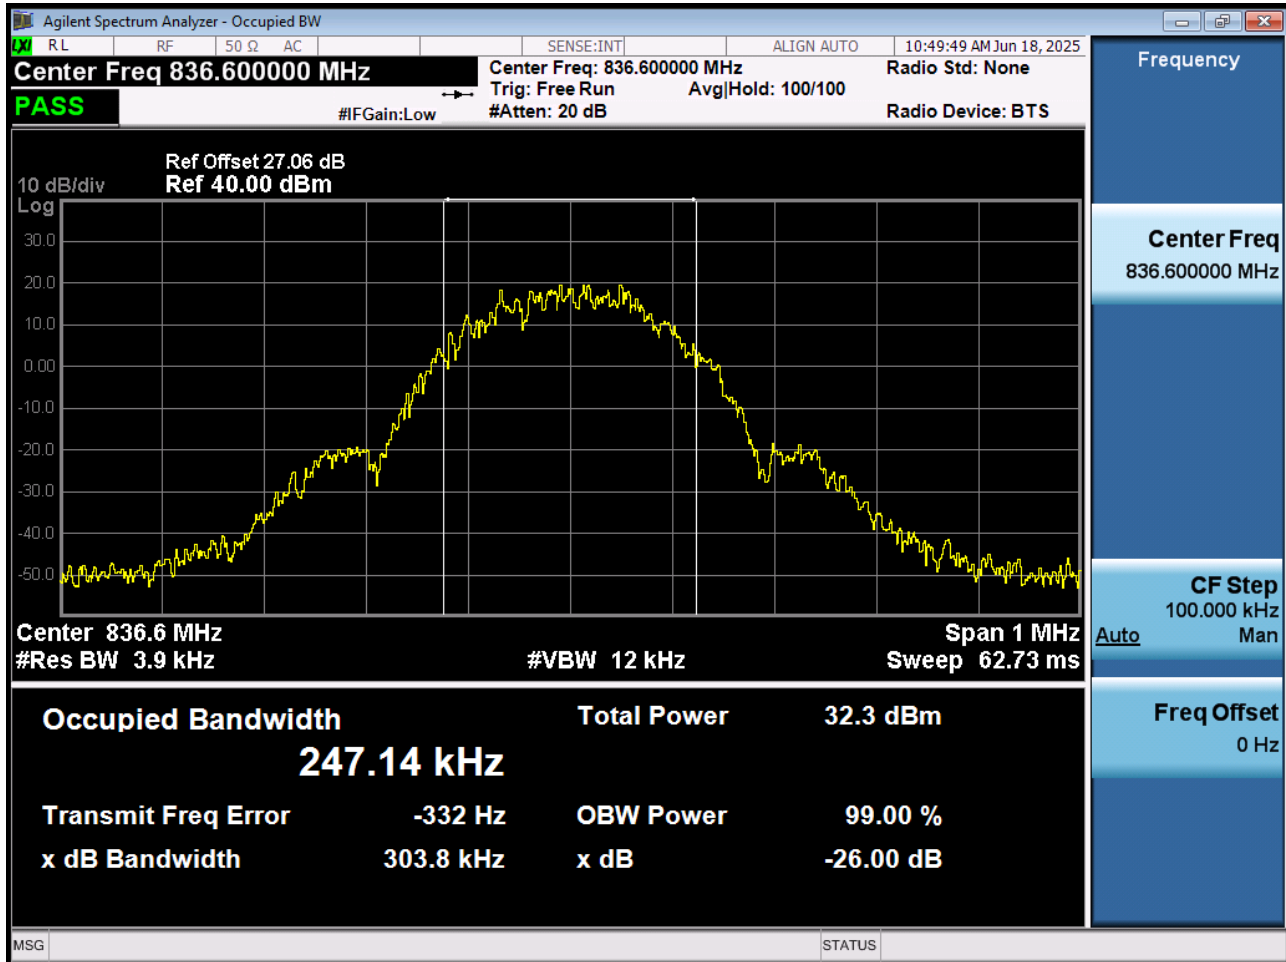


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

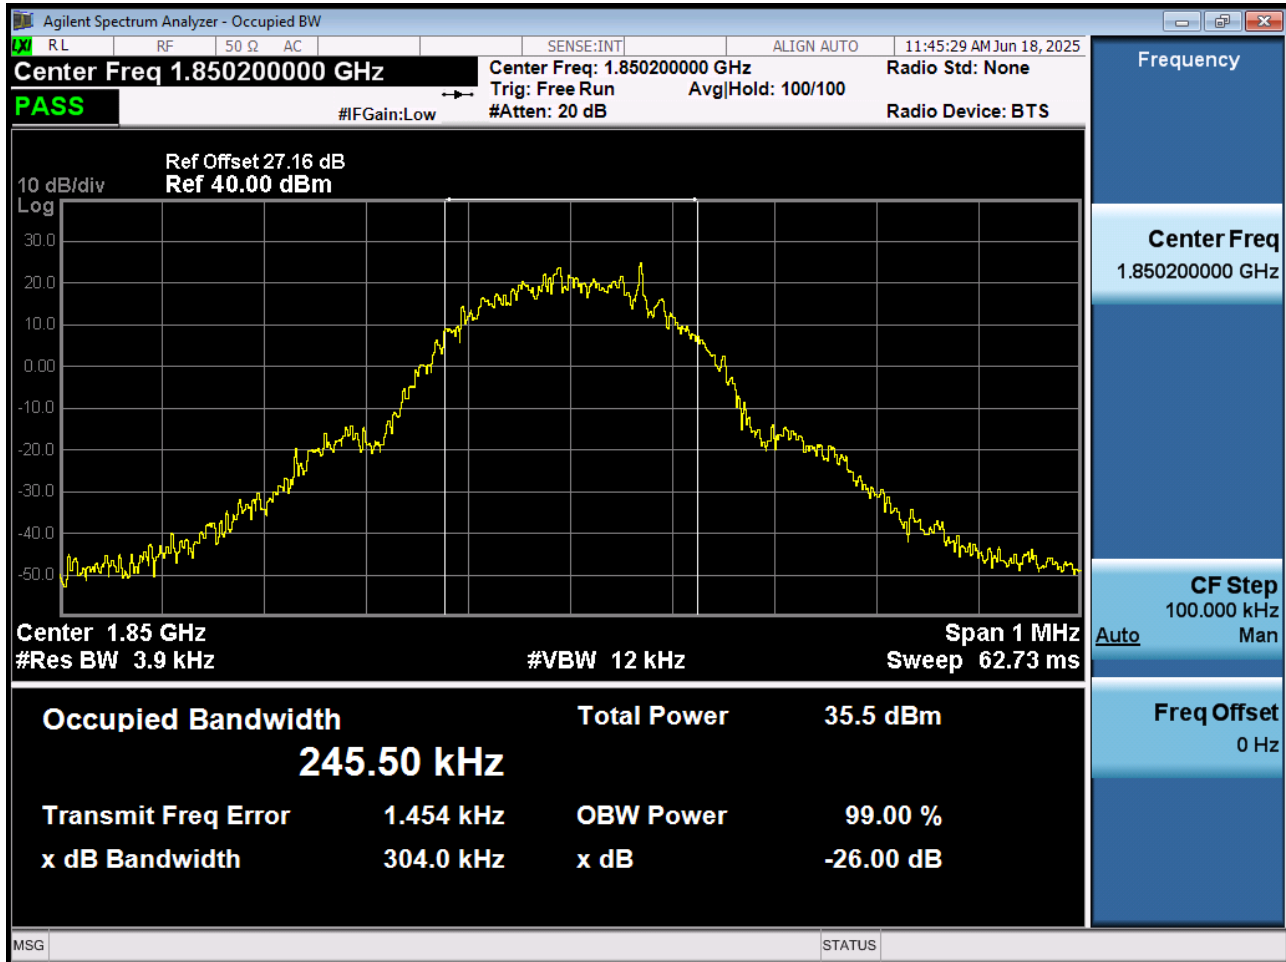


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

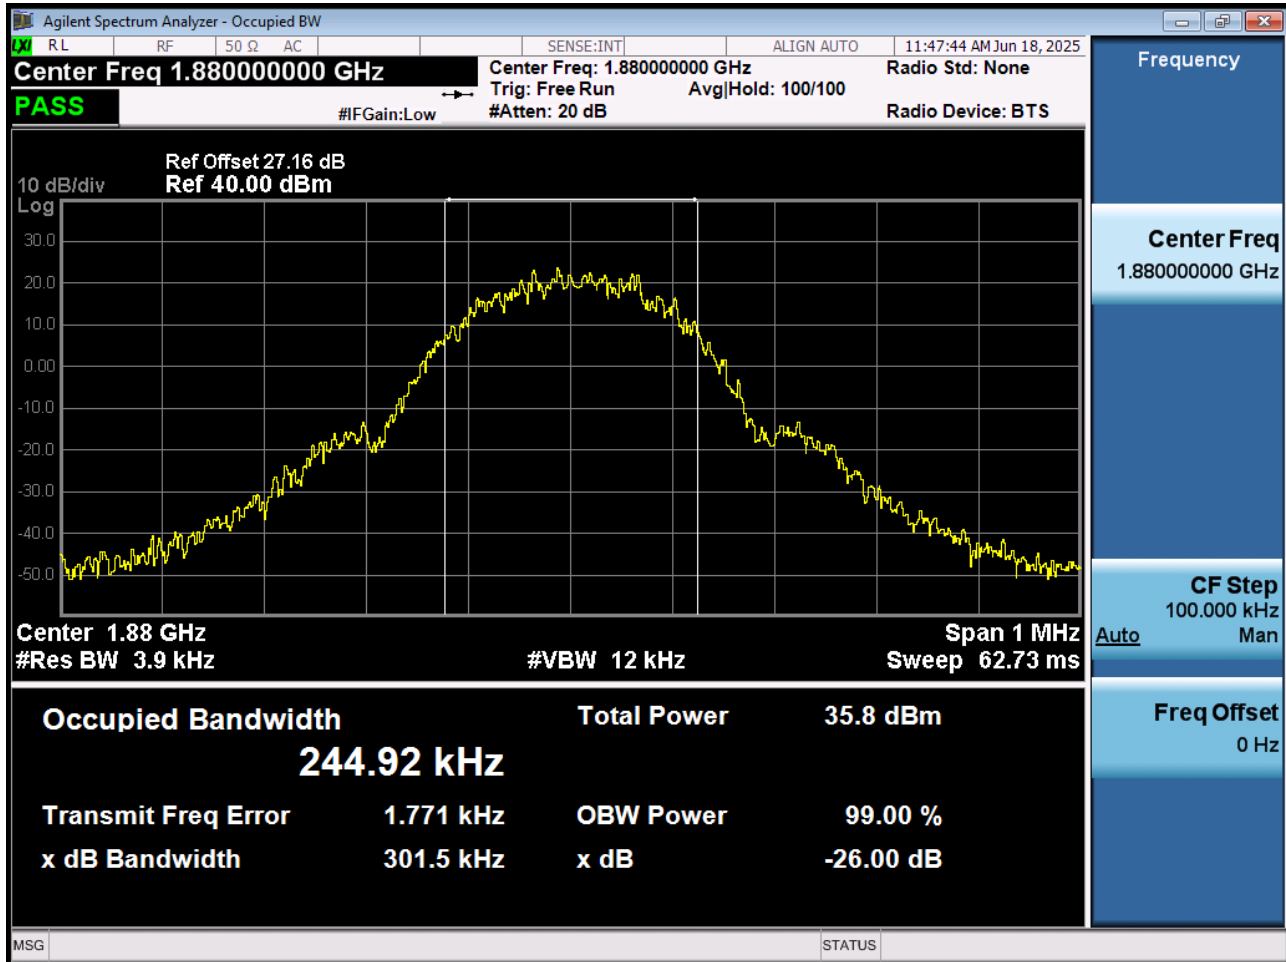


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

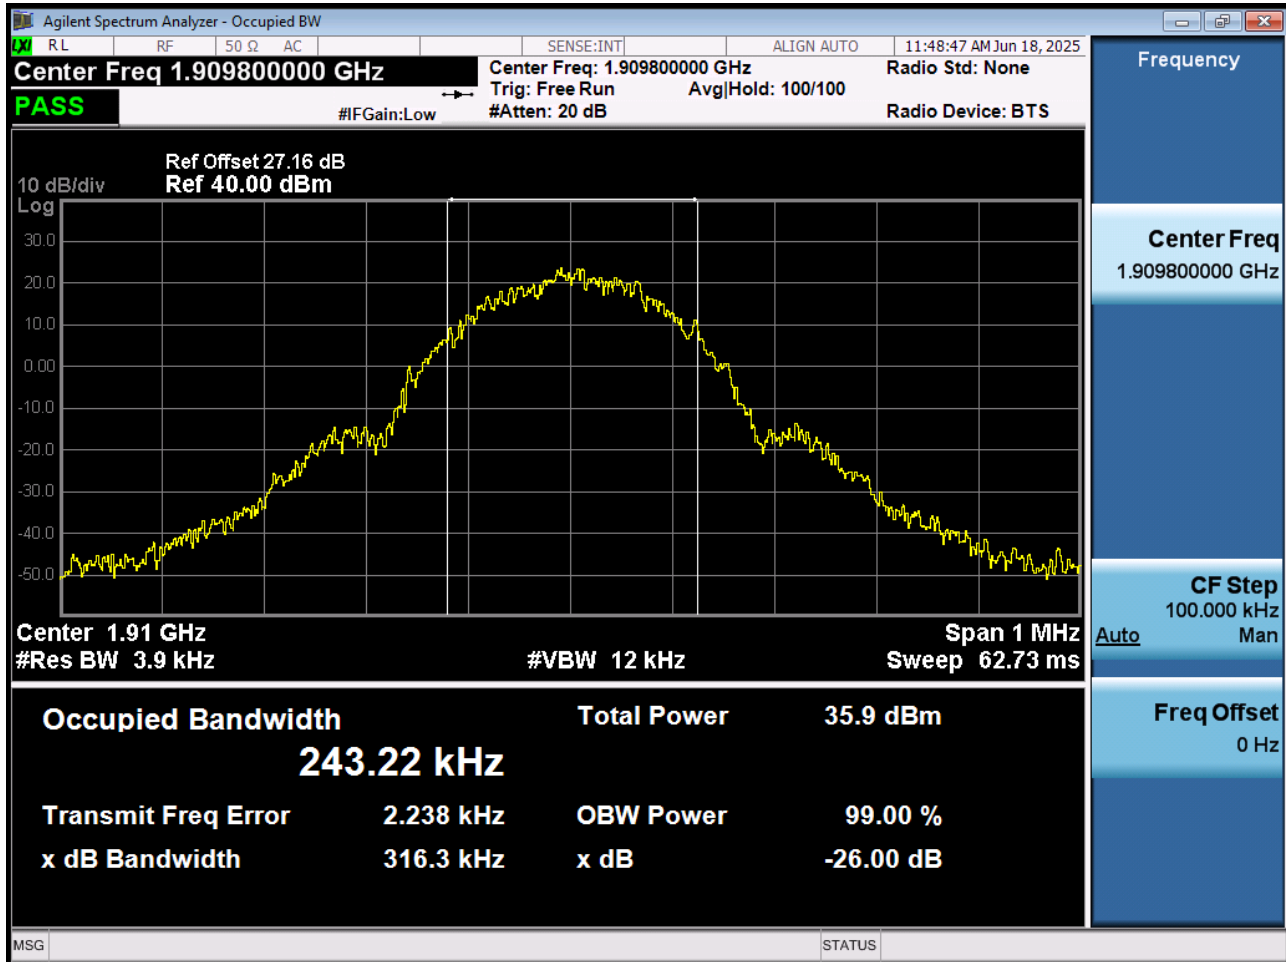


■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

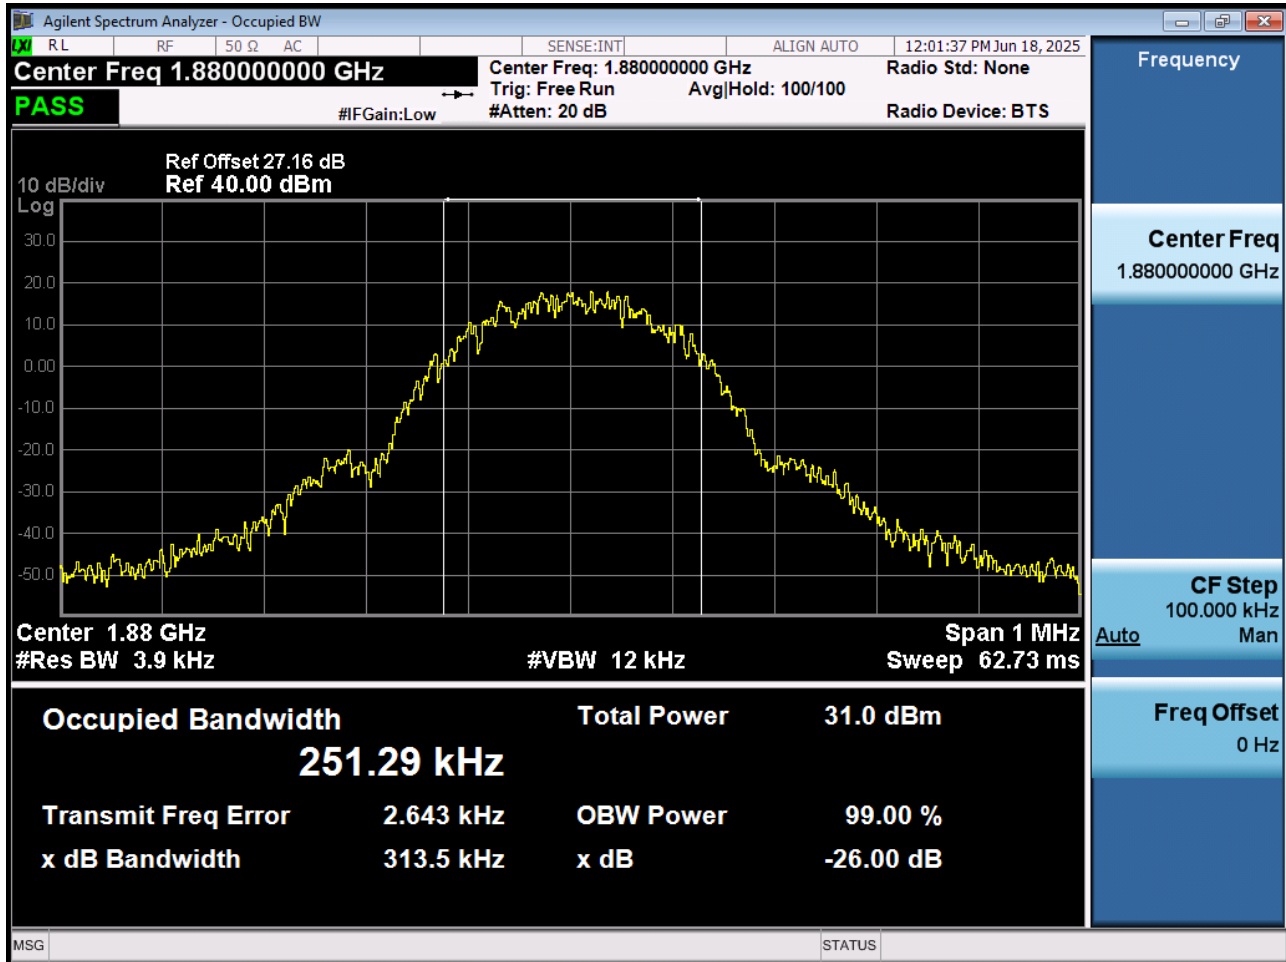


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

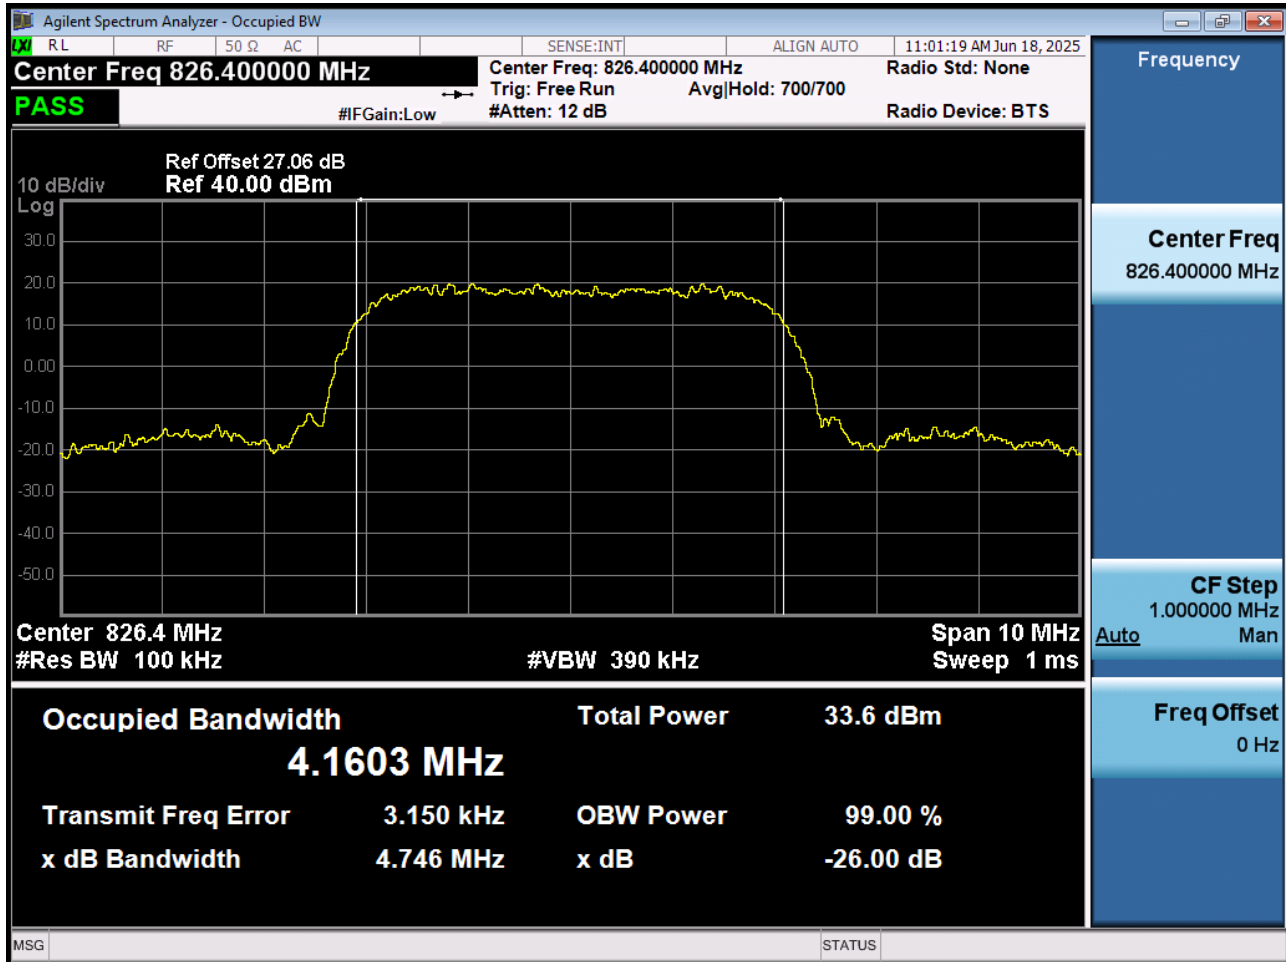


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

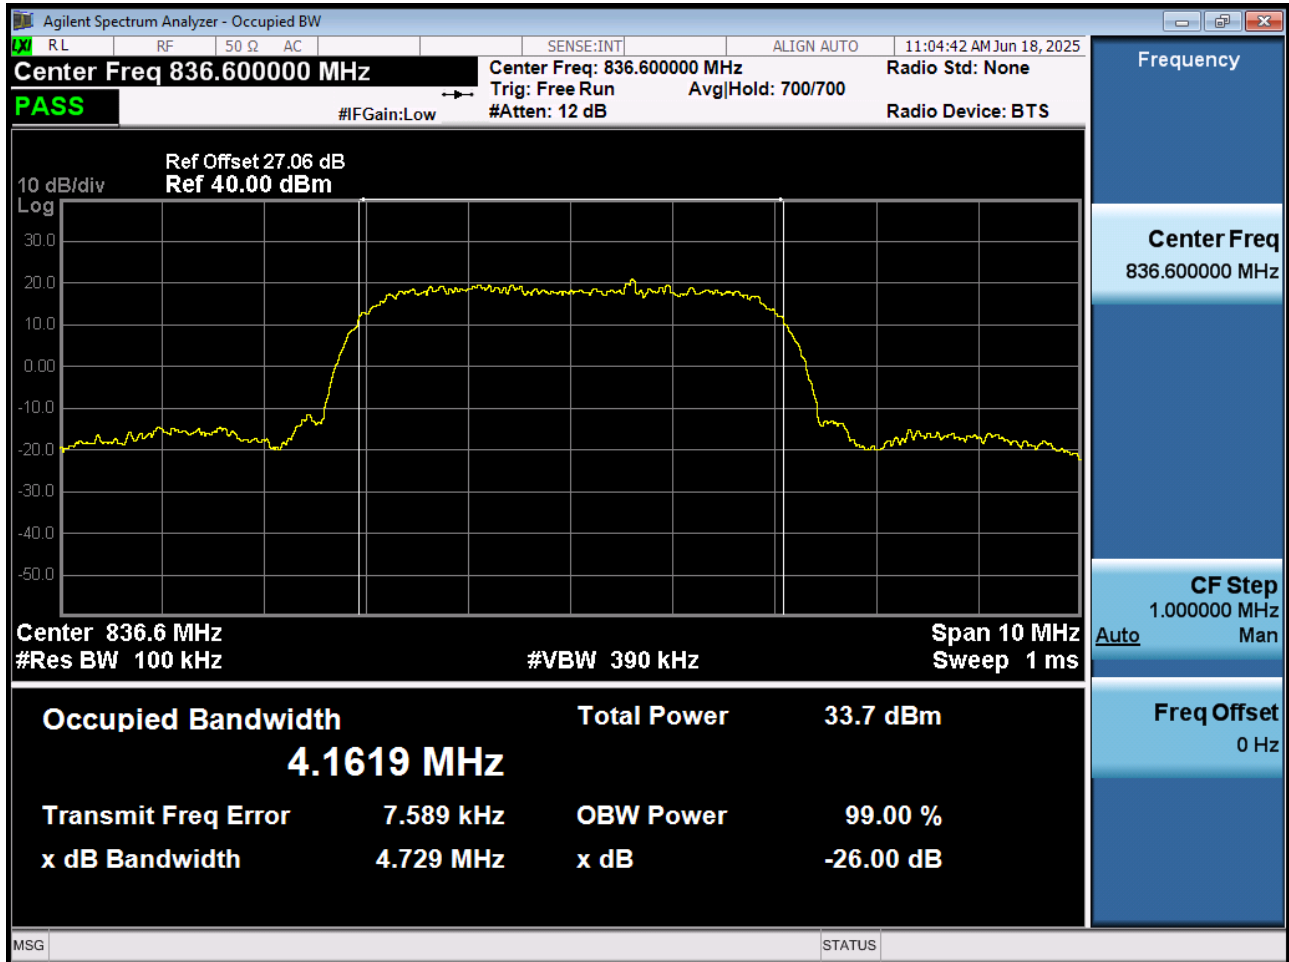


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

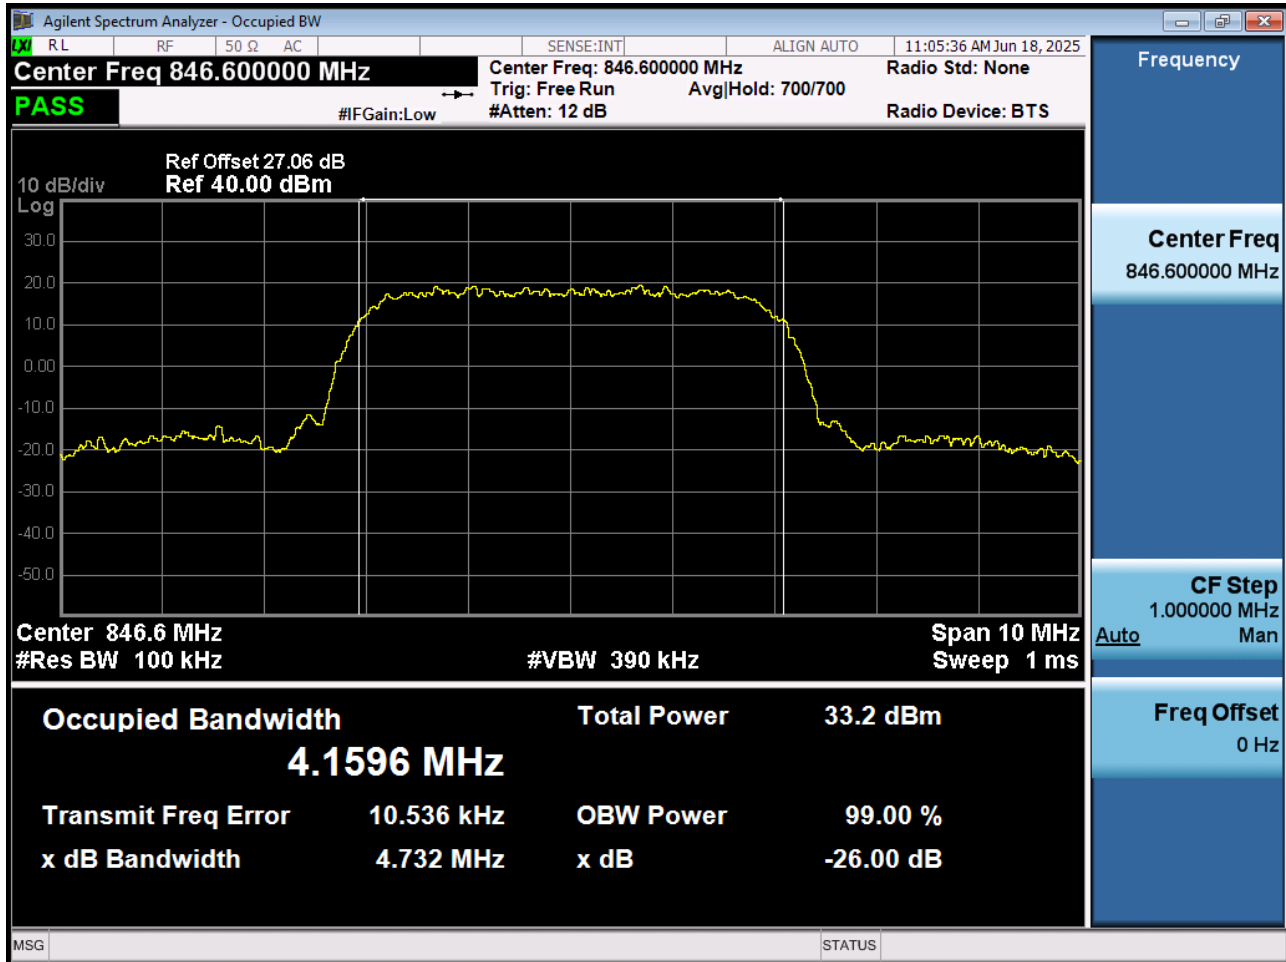


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

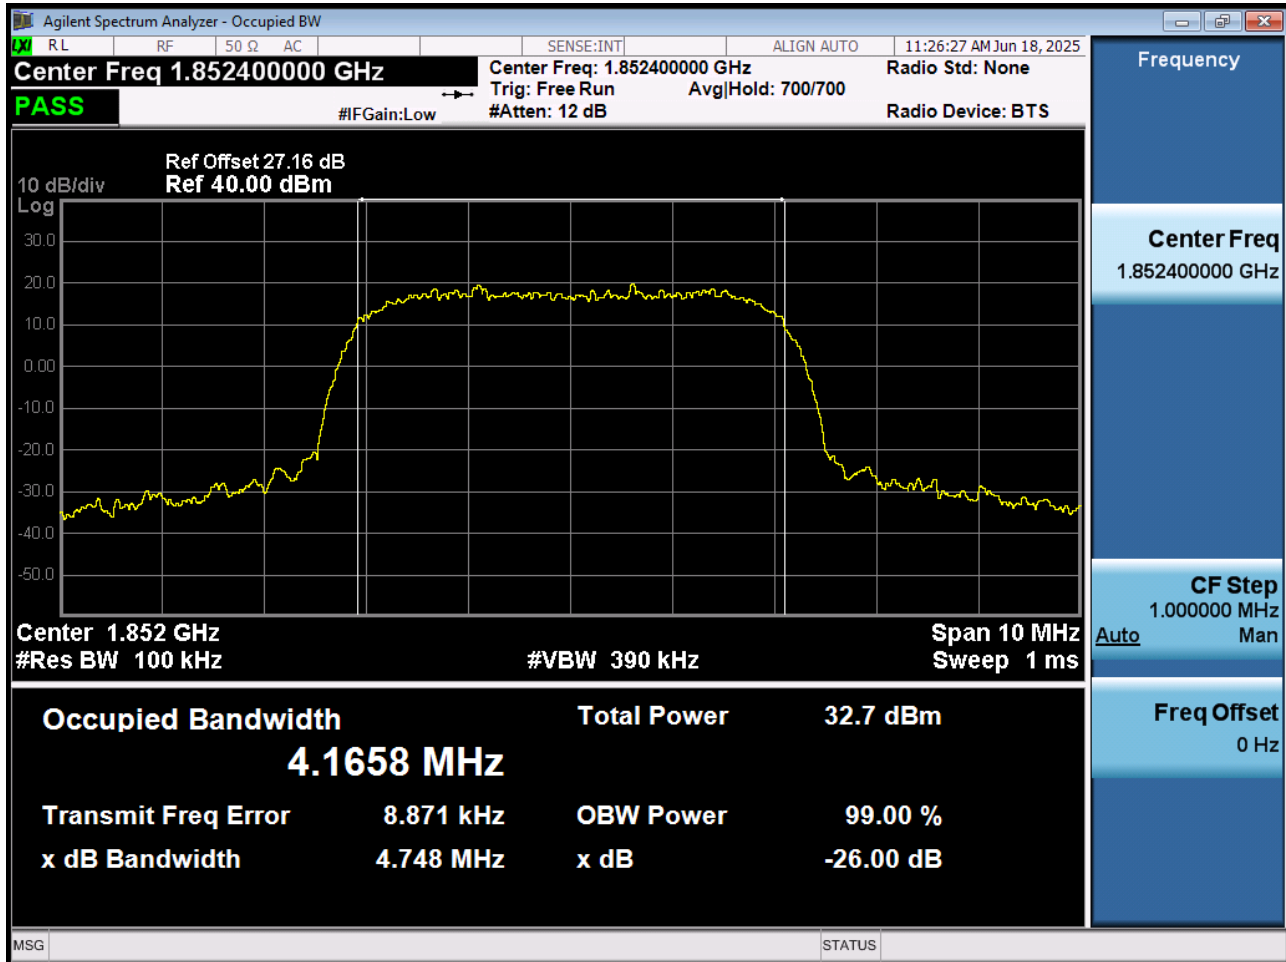


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

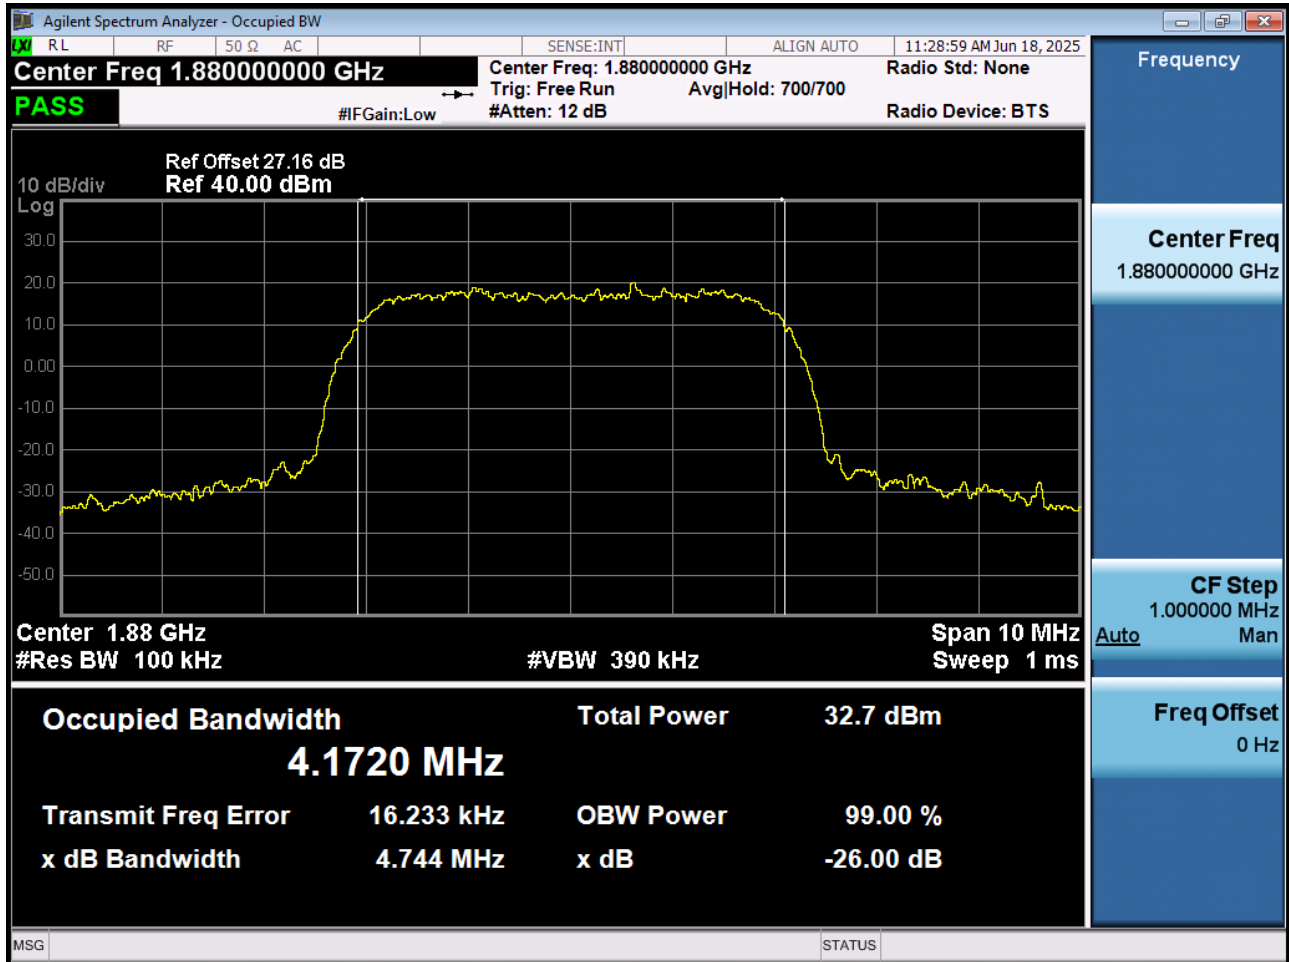


WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

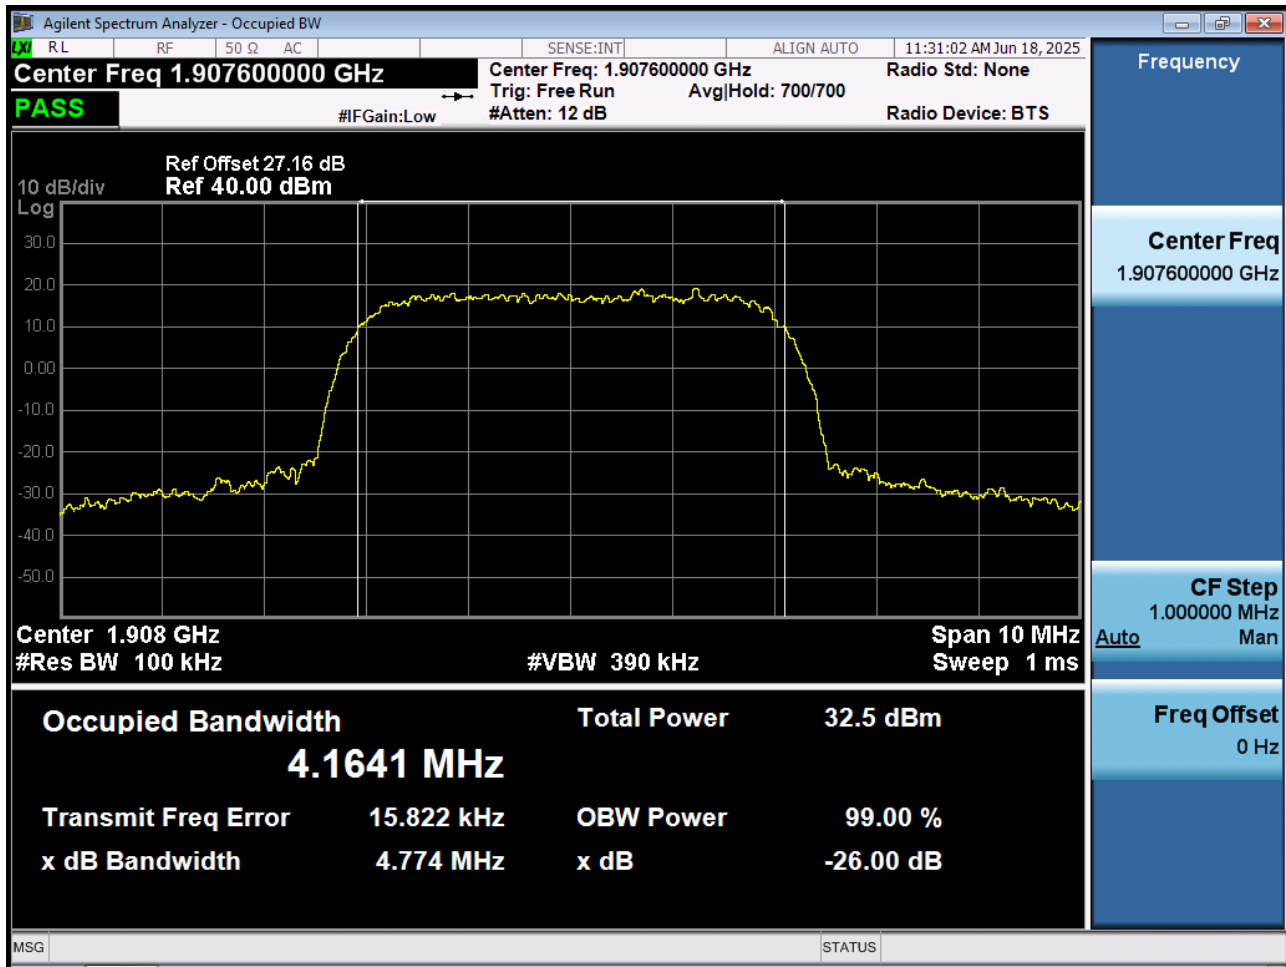


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

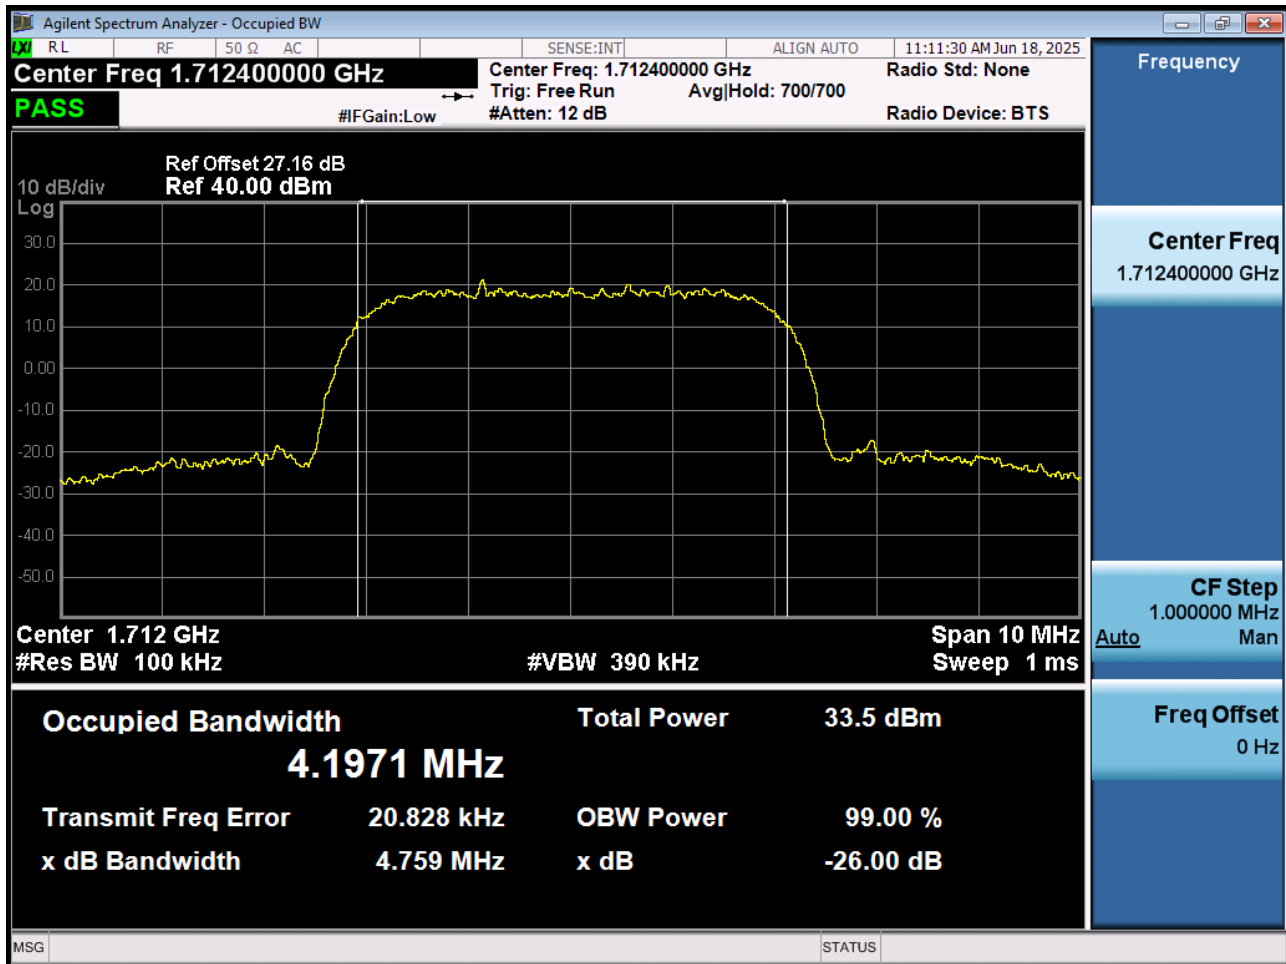

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

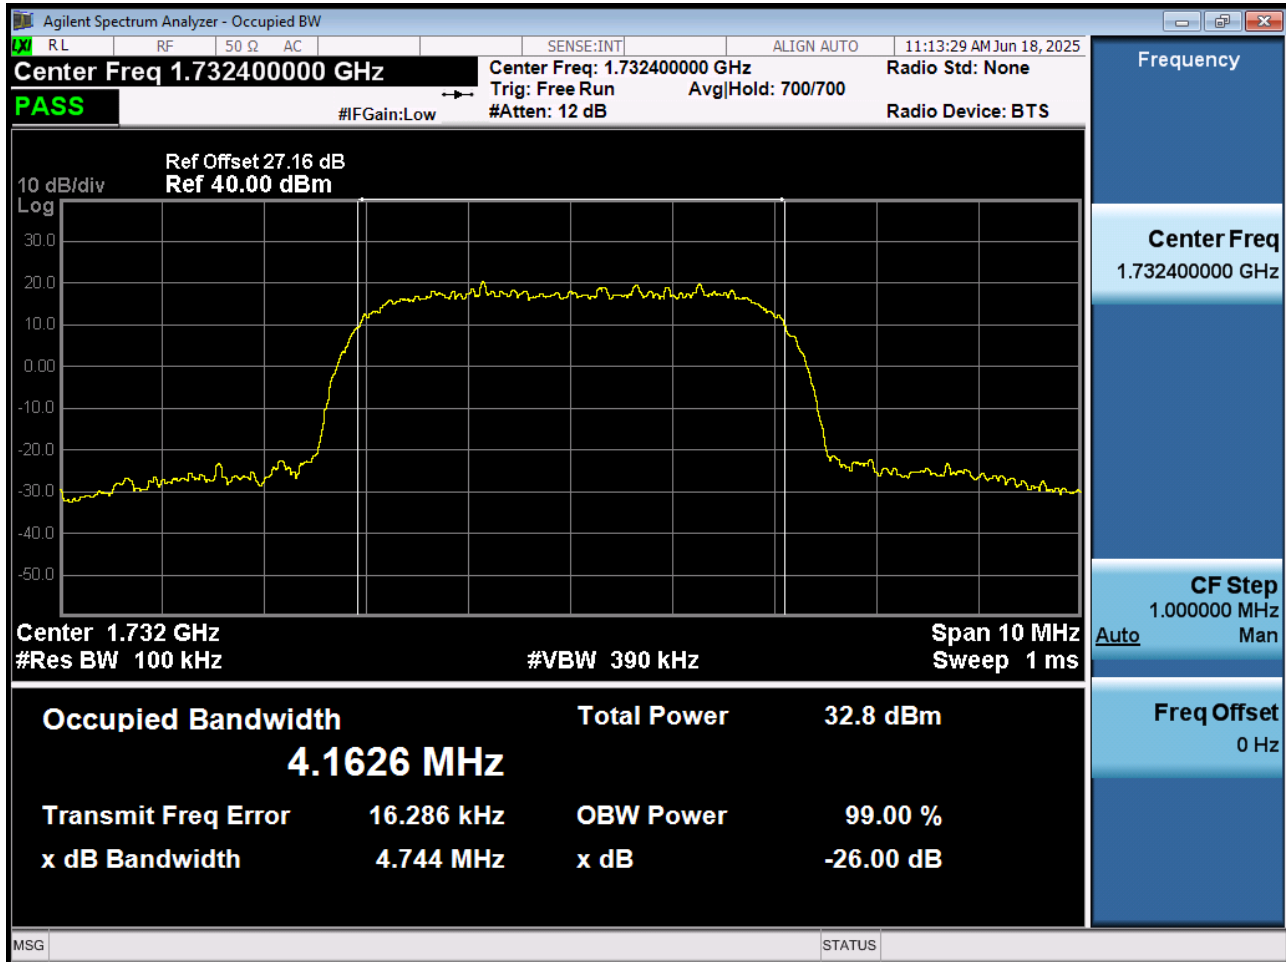


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

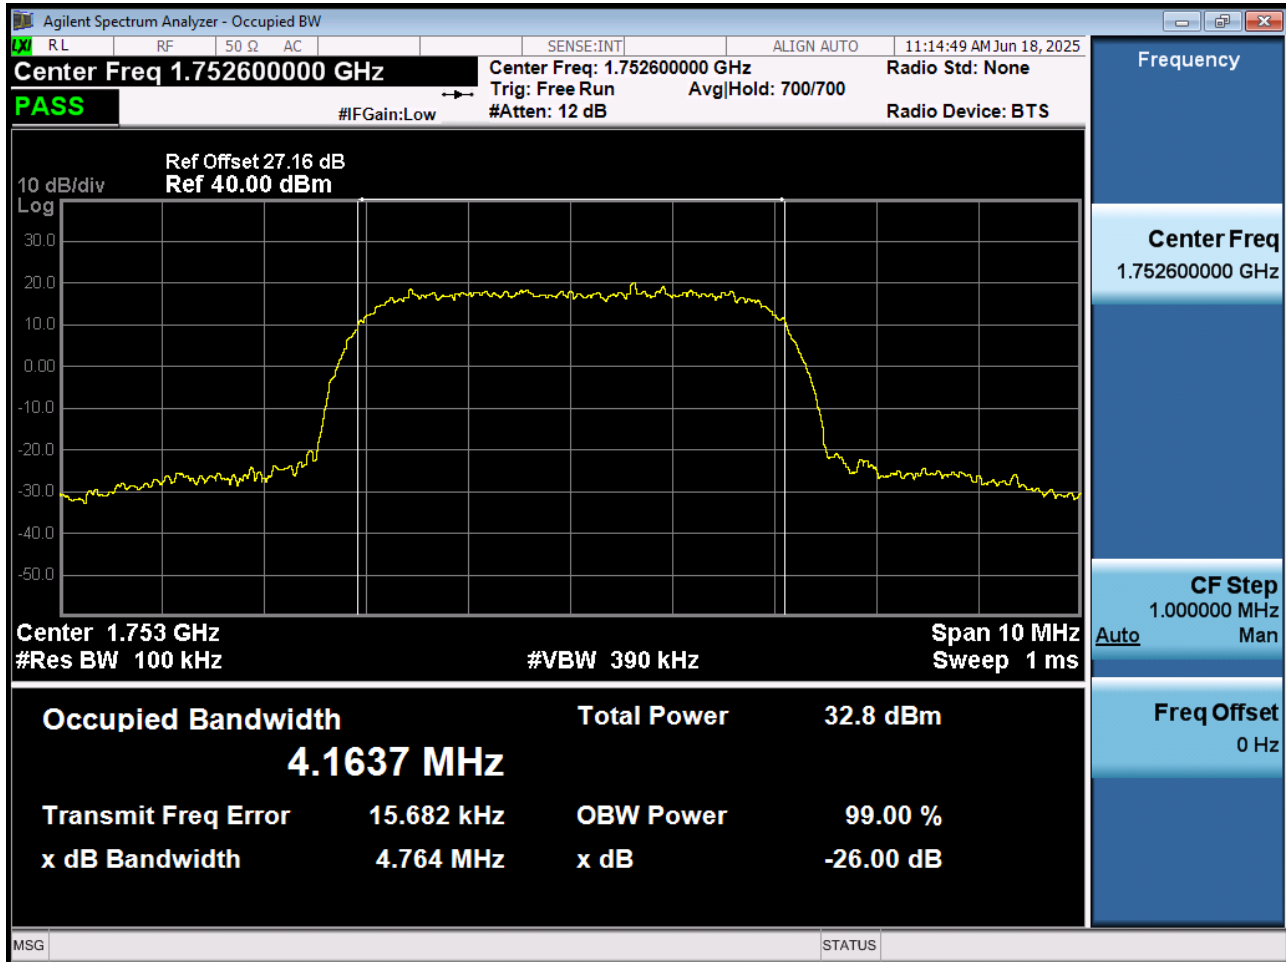


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{pk}


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

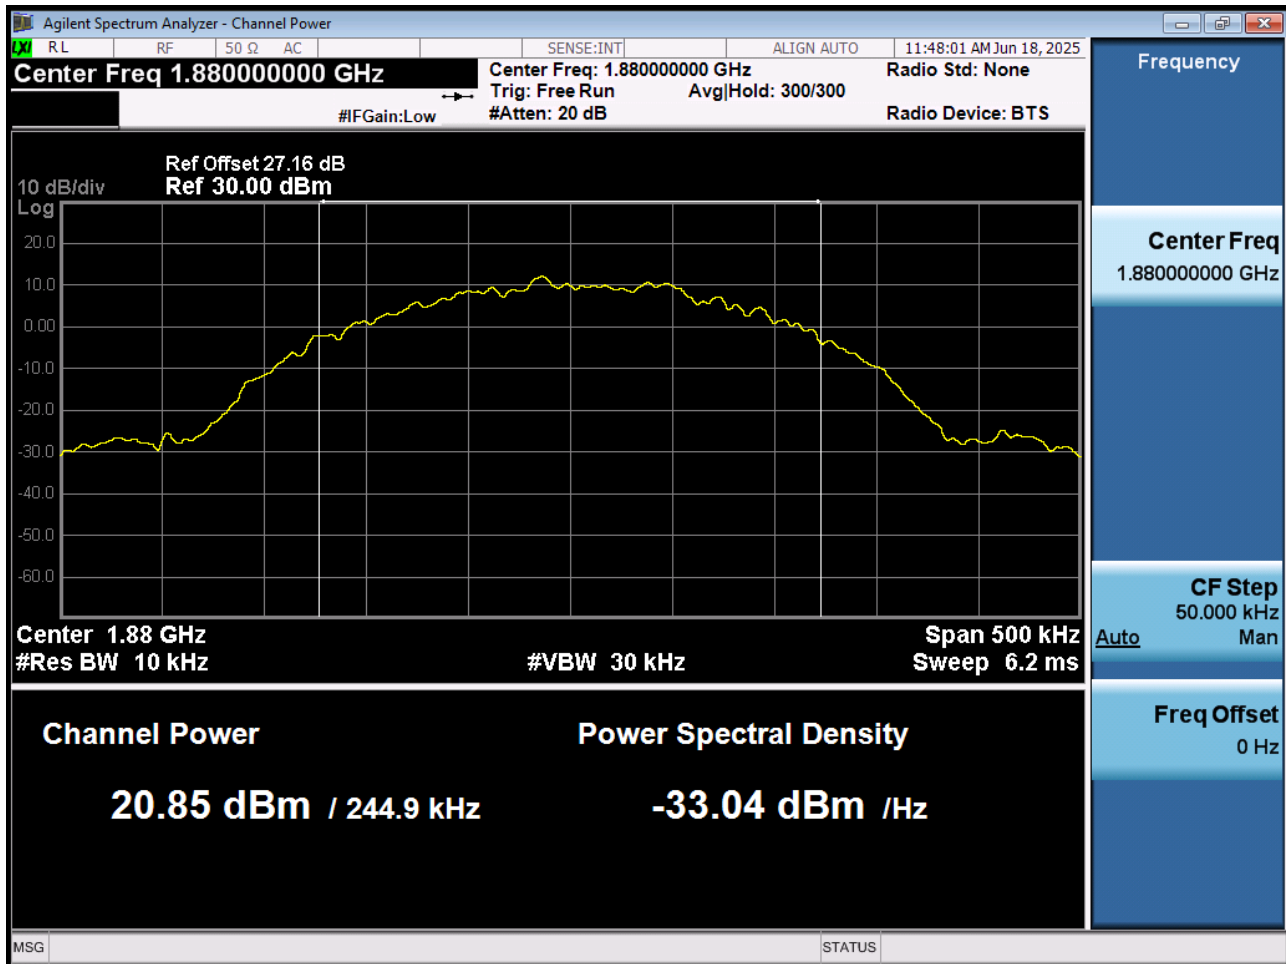

GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

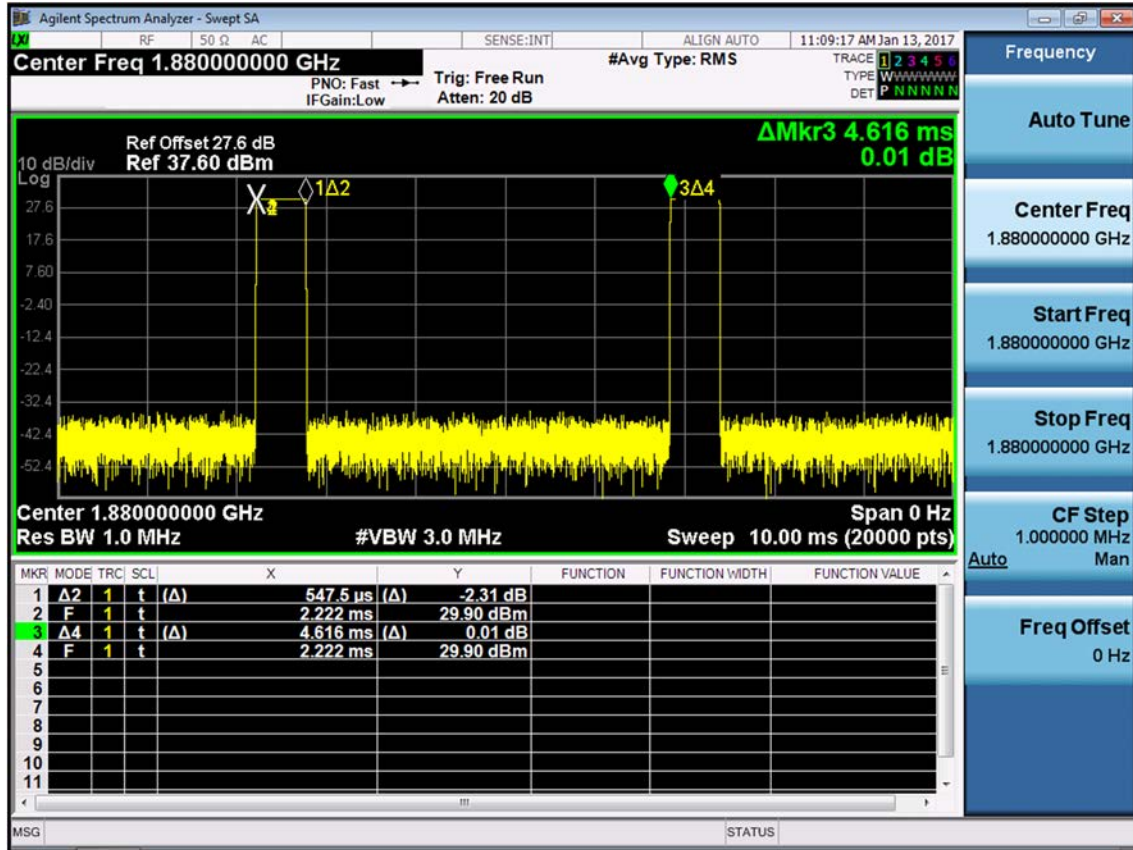


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

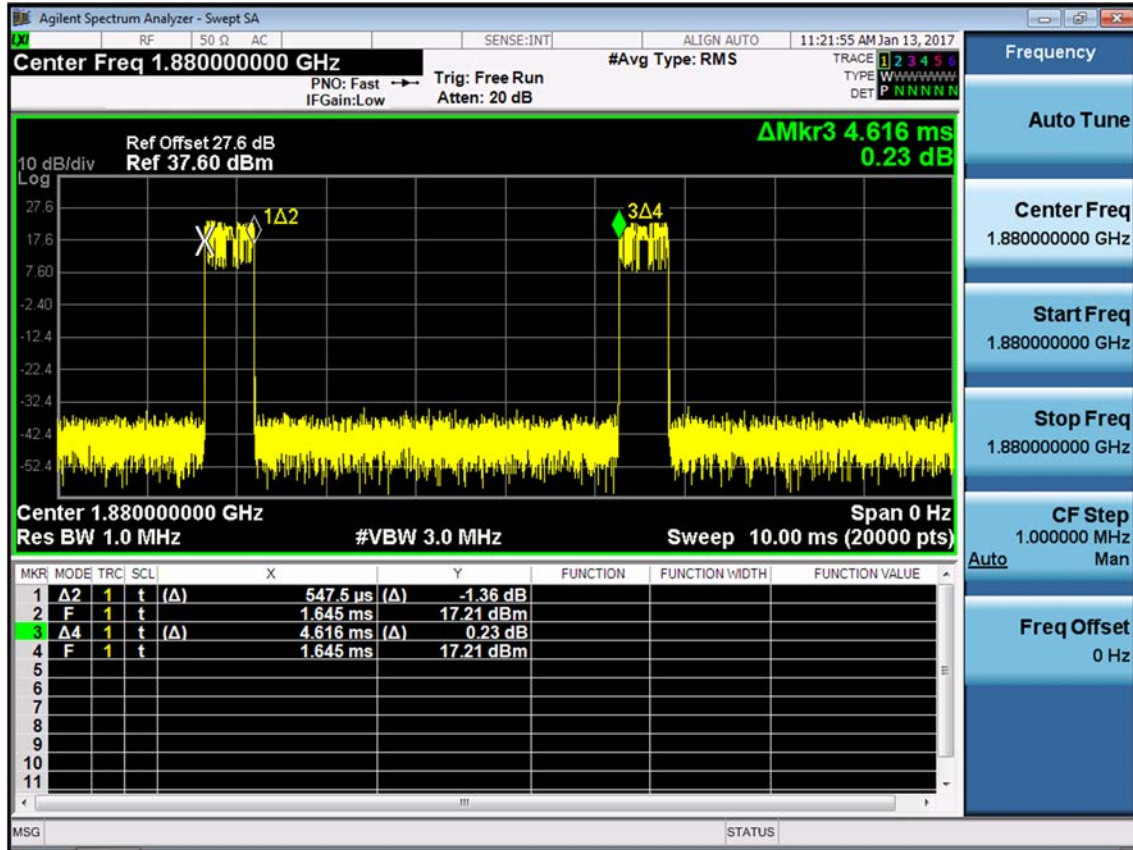


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Pk}




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

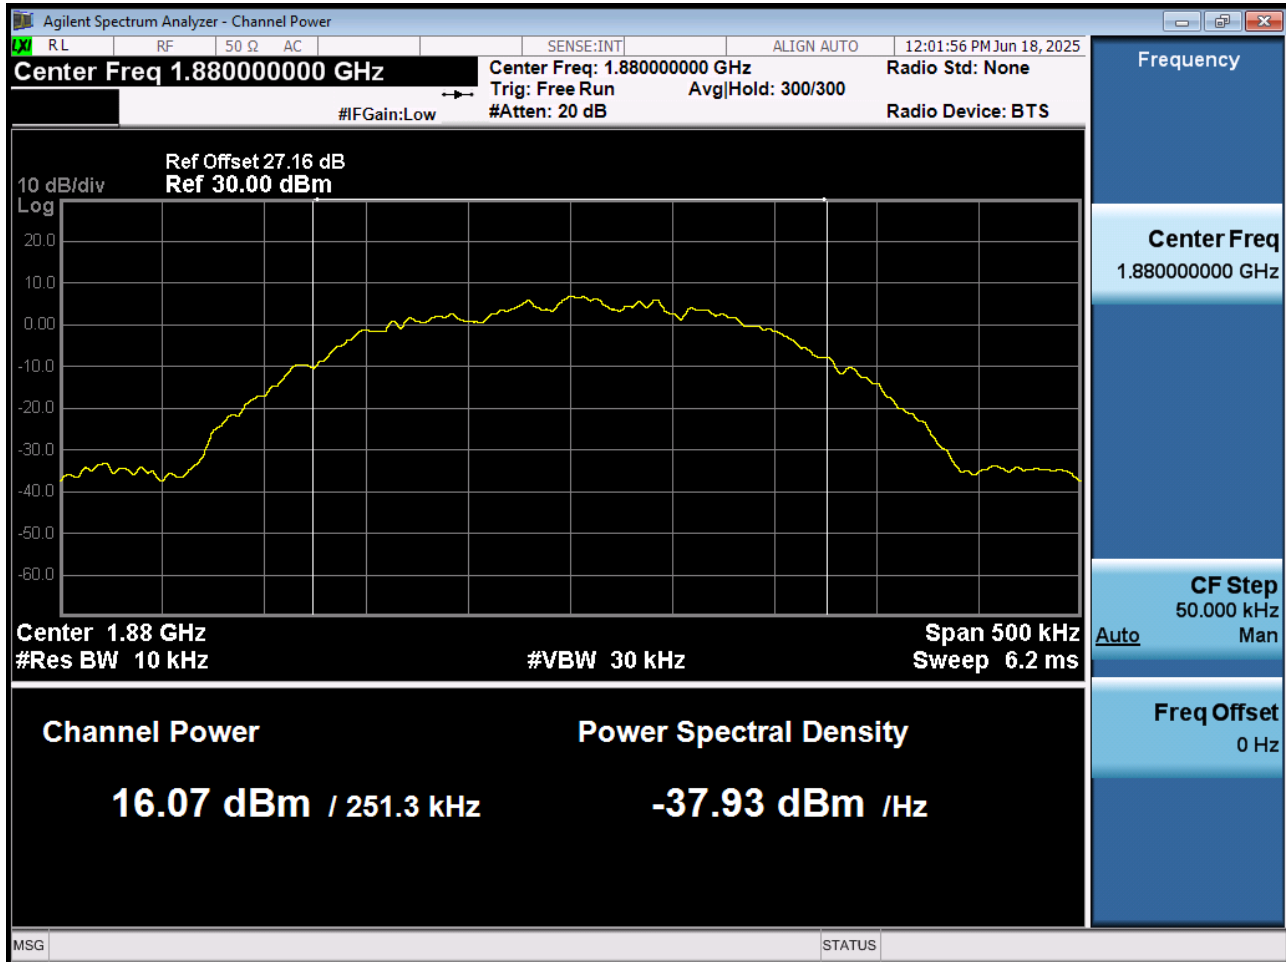


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

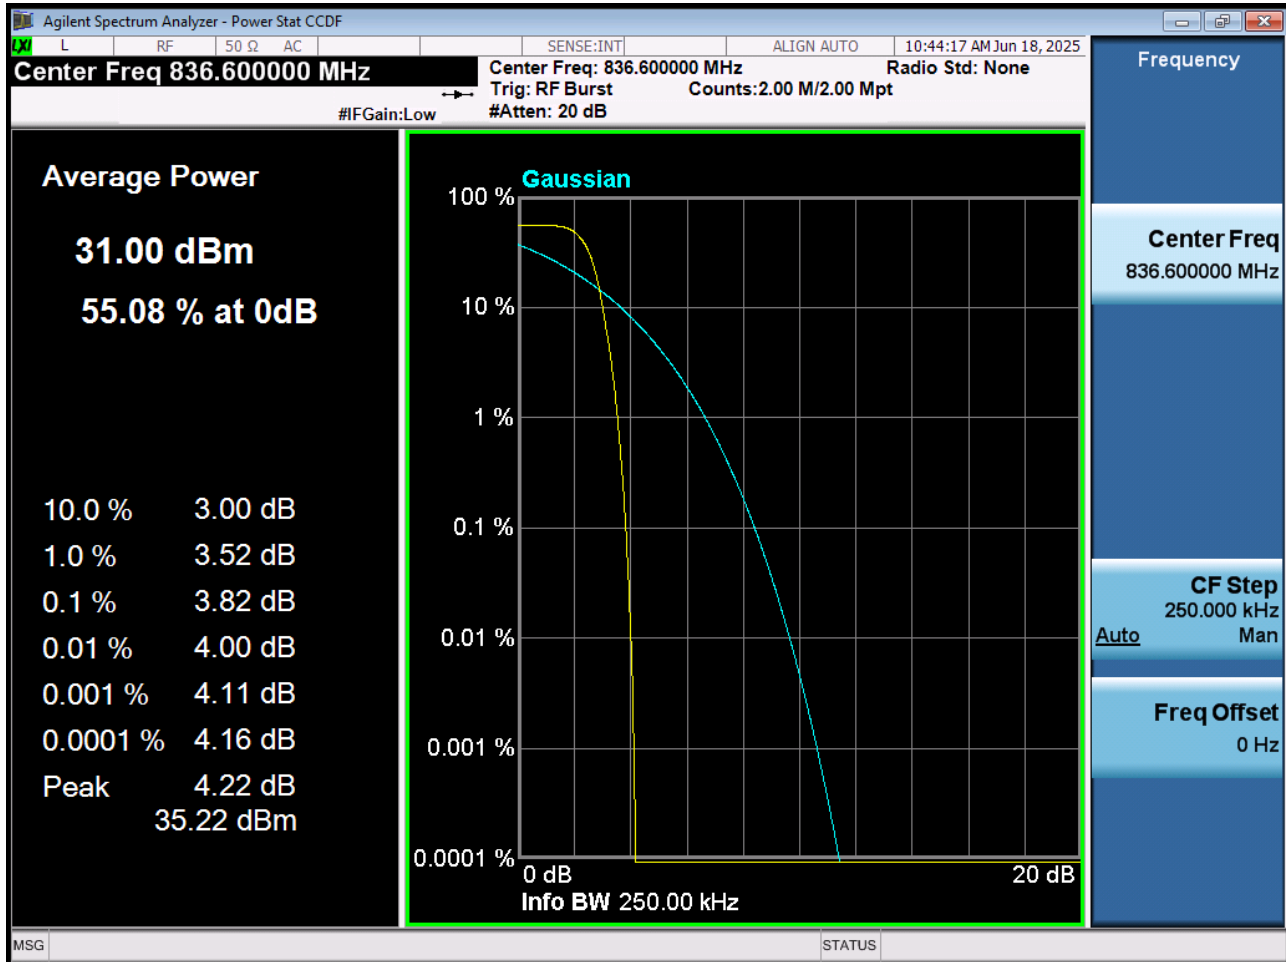


■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

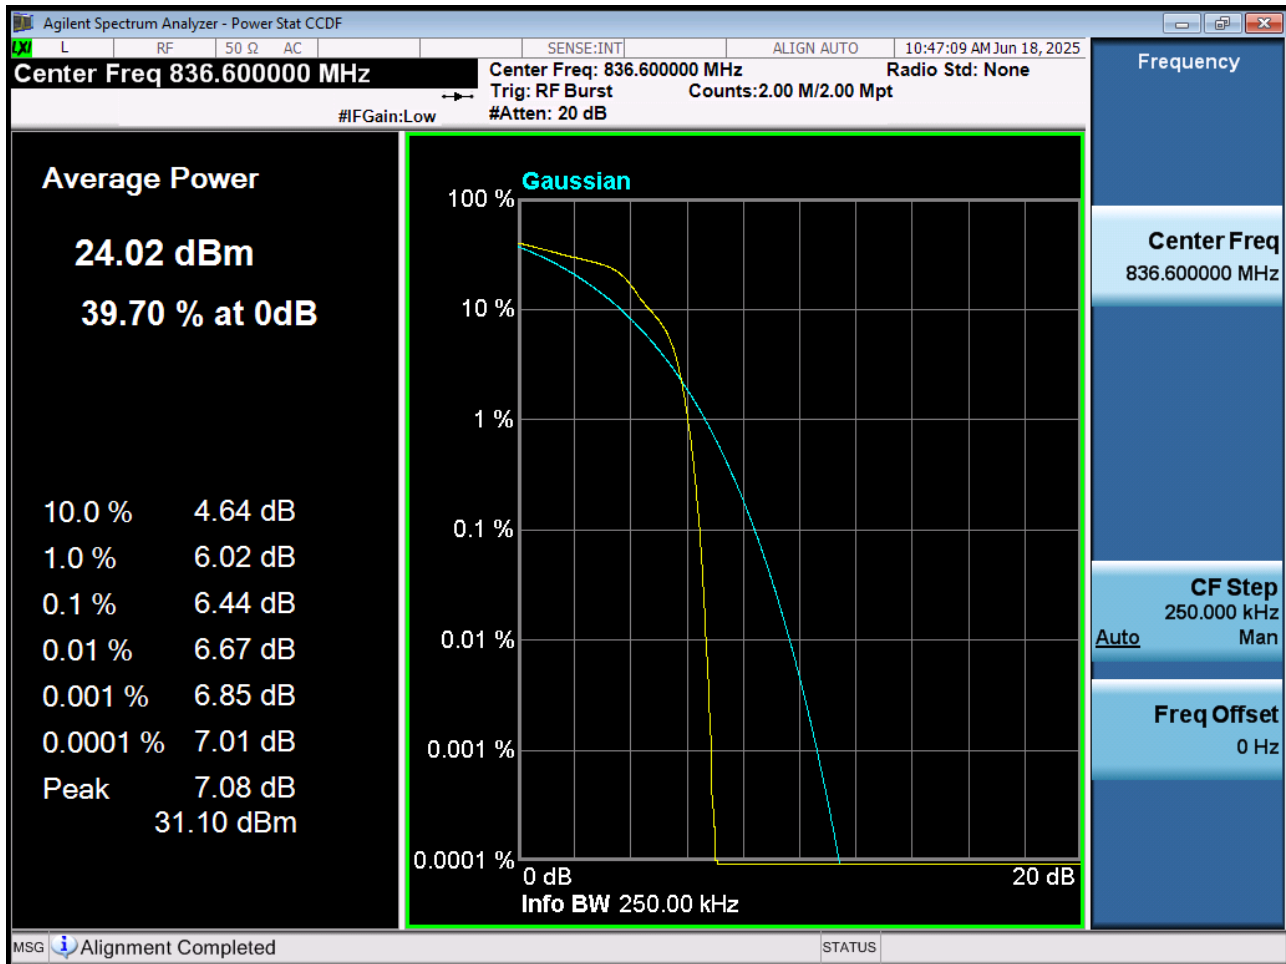


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

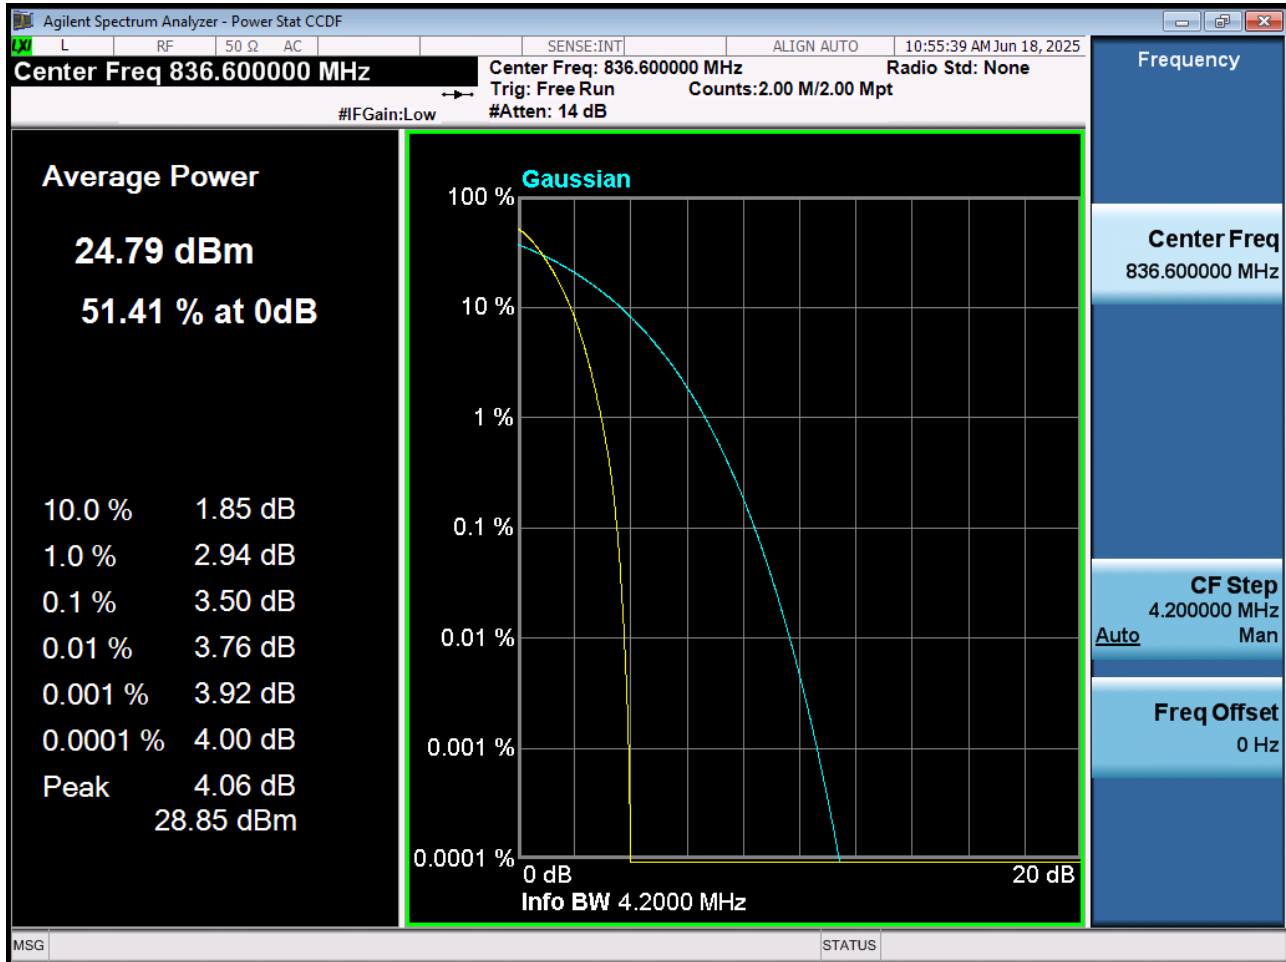


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

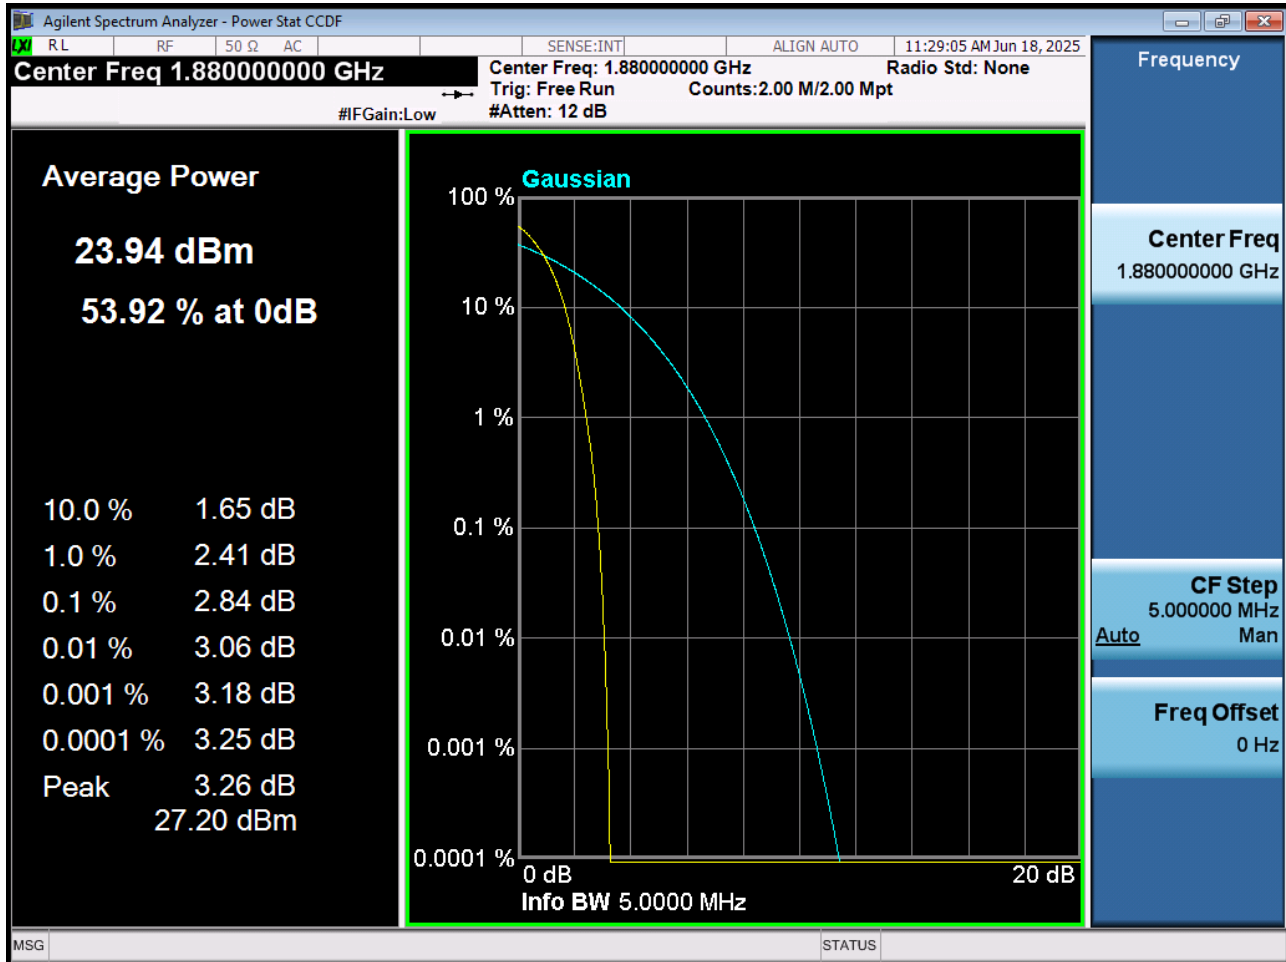

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

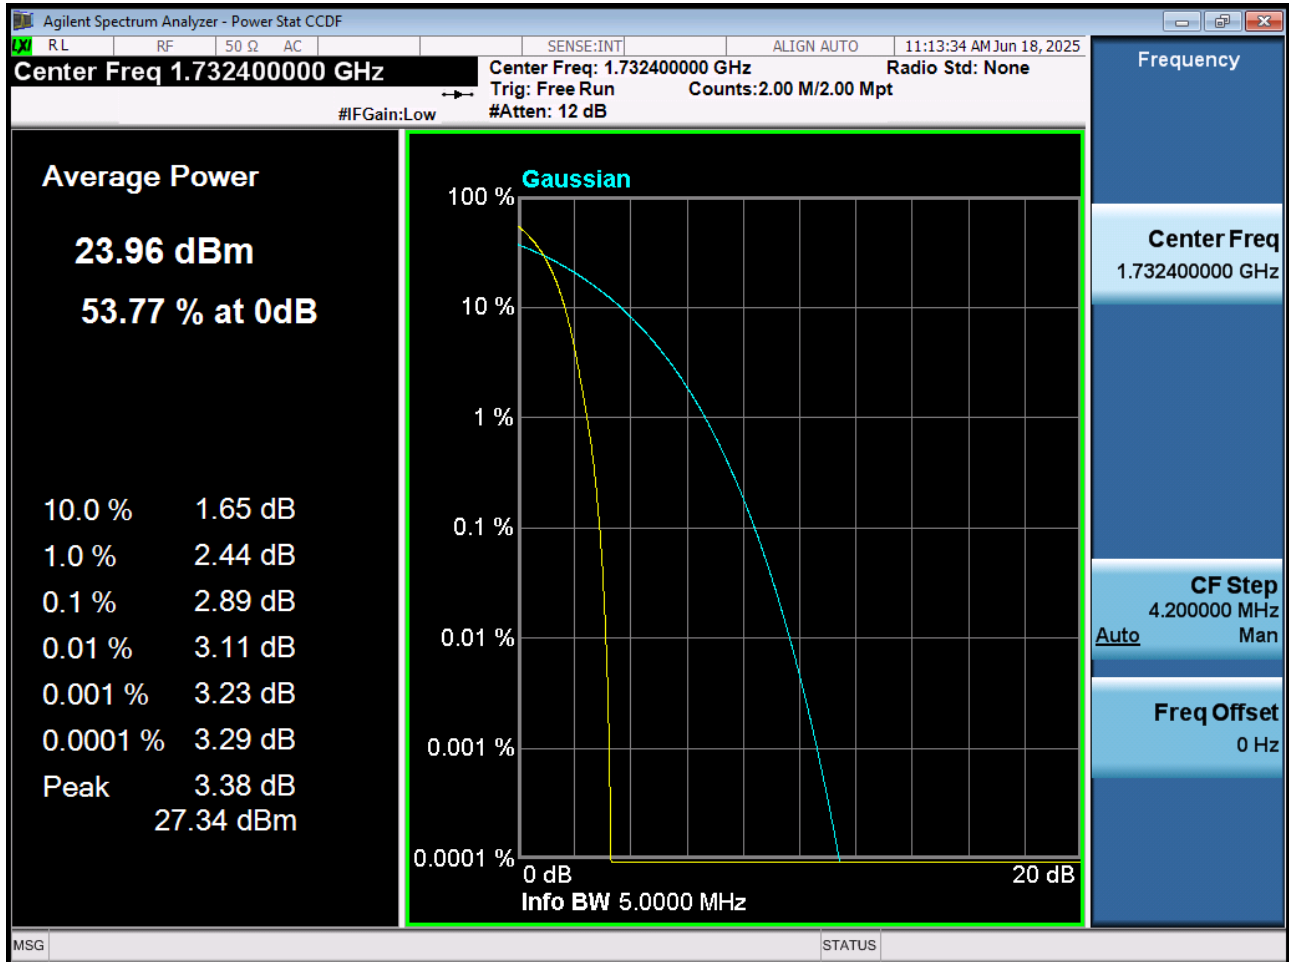


■ GSM850 MODE (128 CH.) Block Edge 1

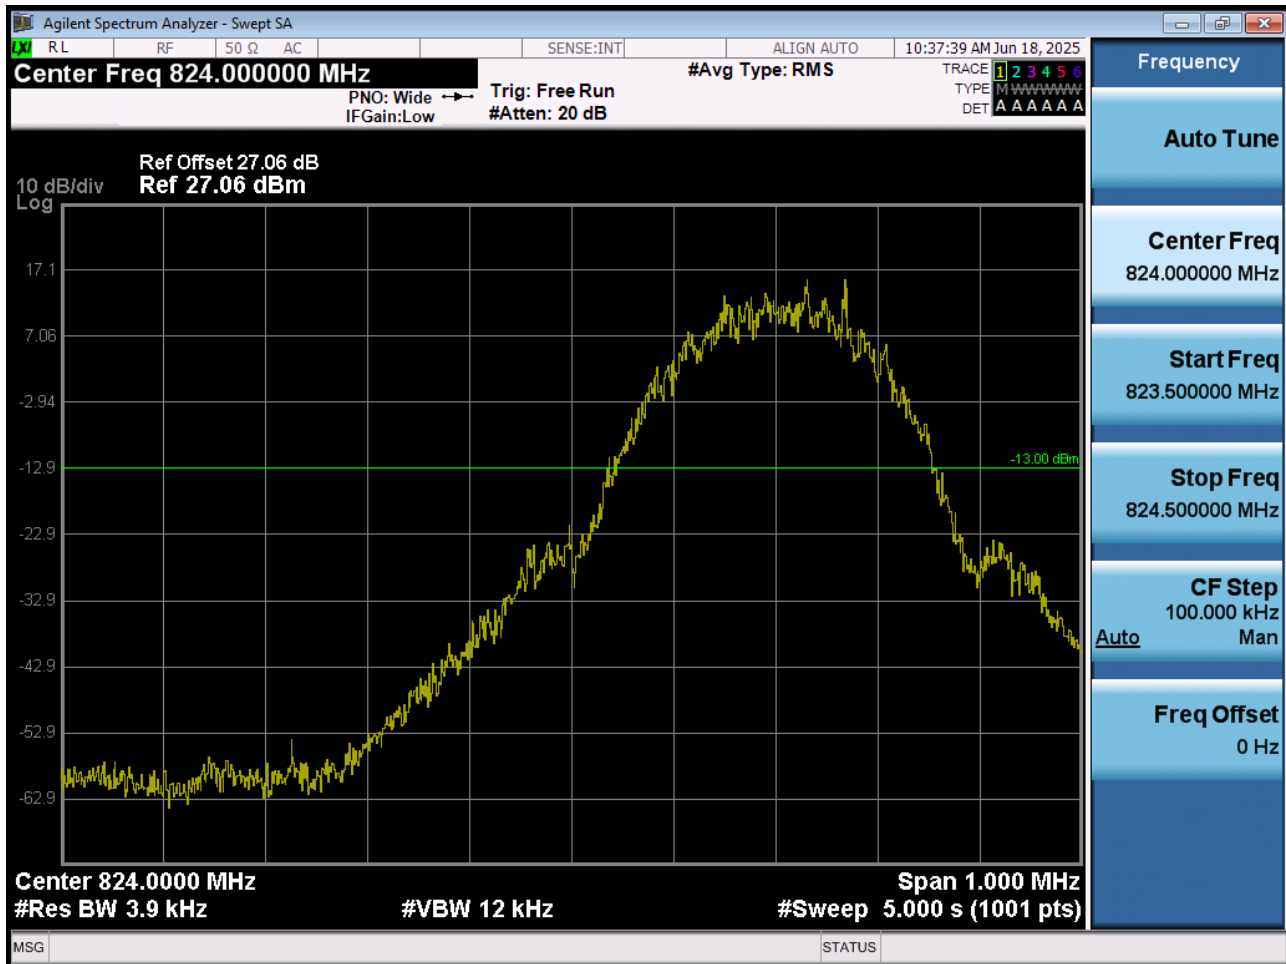


■ GSM850 MODE (128 CH.) Block Edge 2




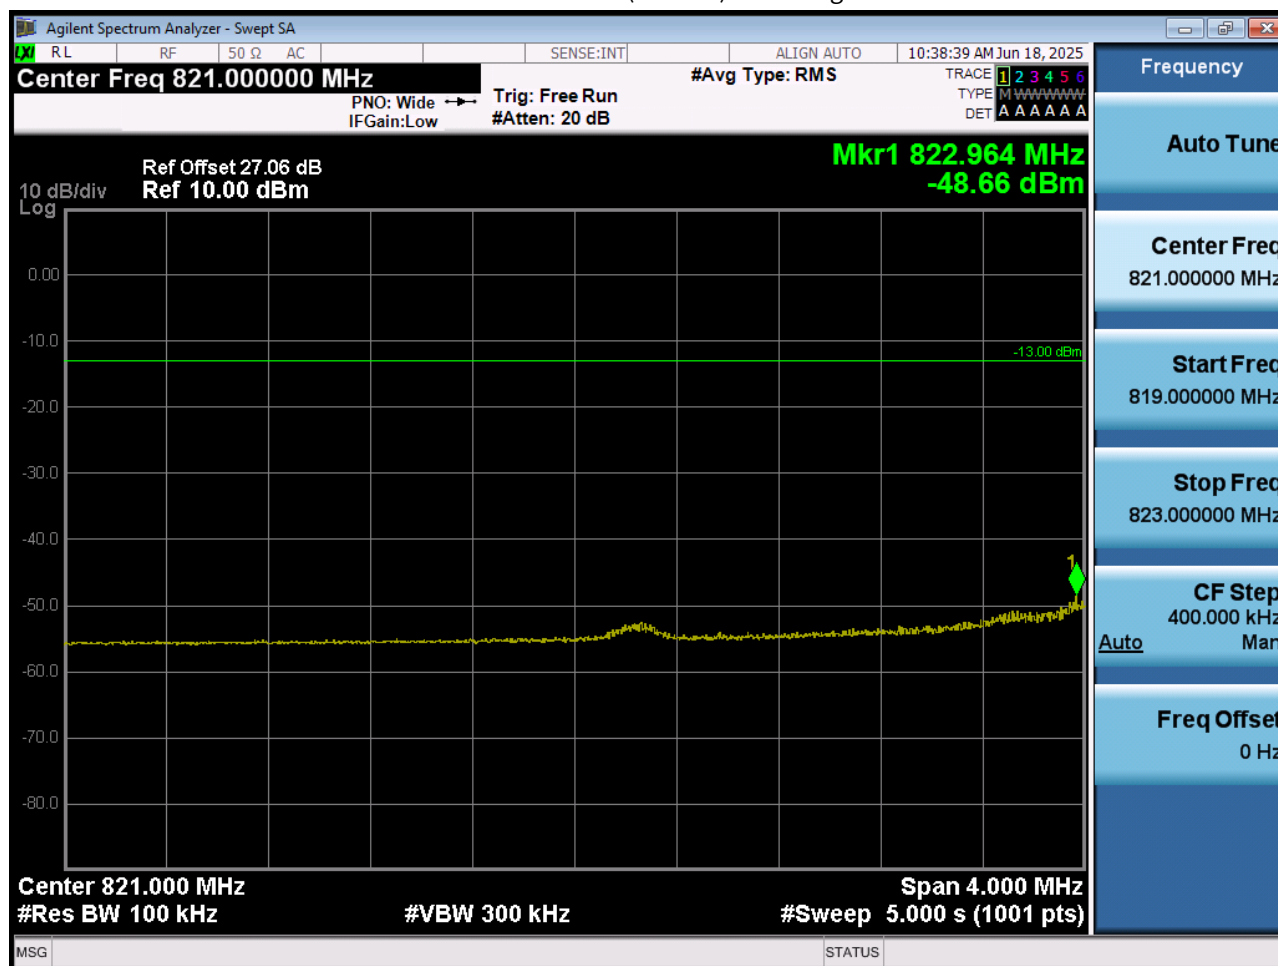

■ GSM850 MODE (251 CH.) Block Edge 1

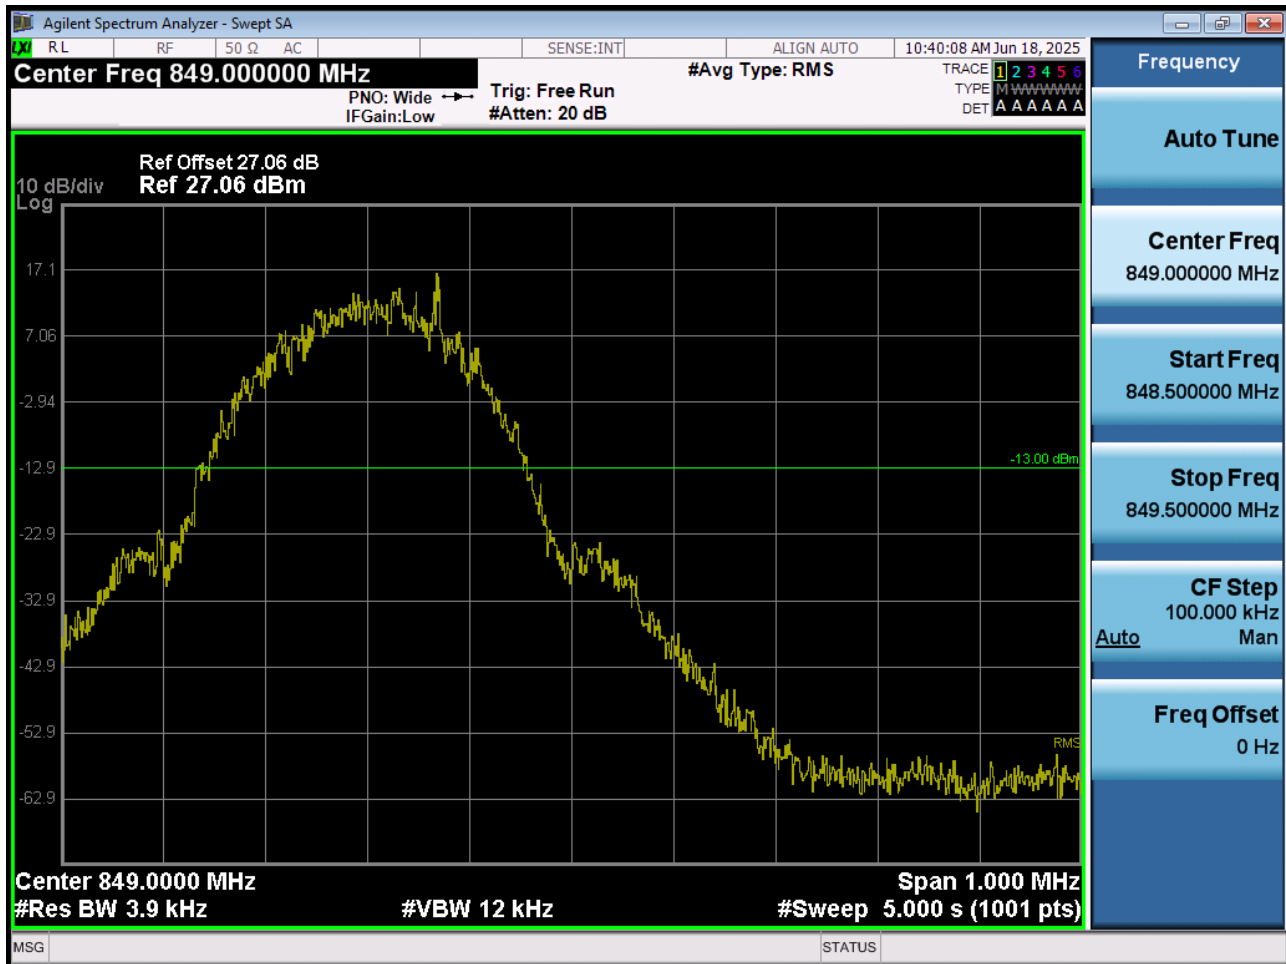


■ GSM850 MODE (251 CH.) Block Edge 2

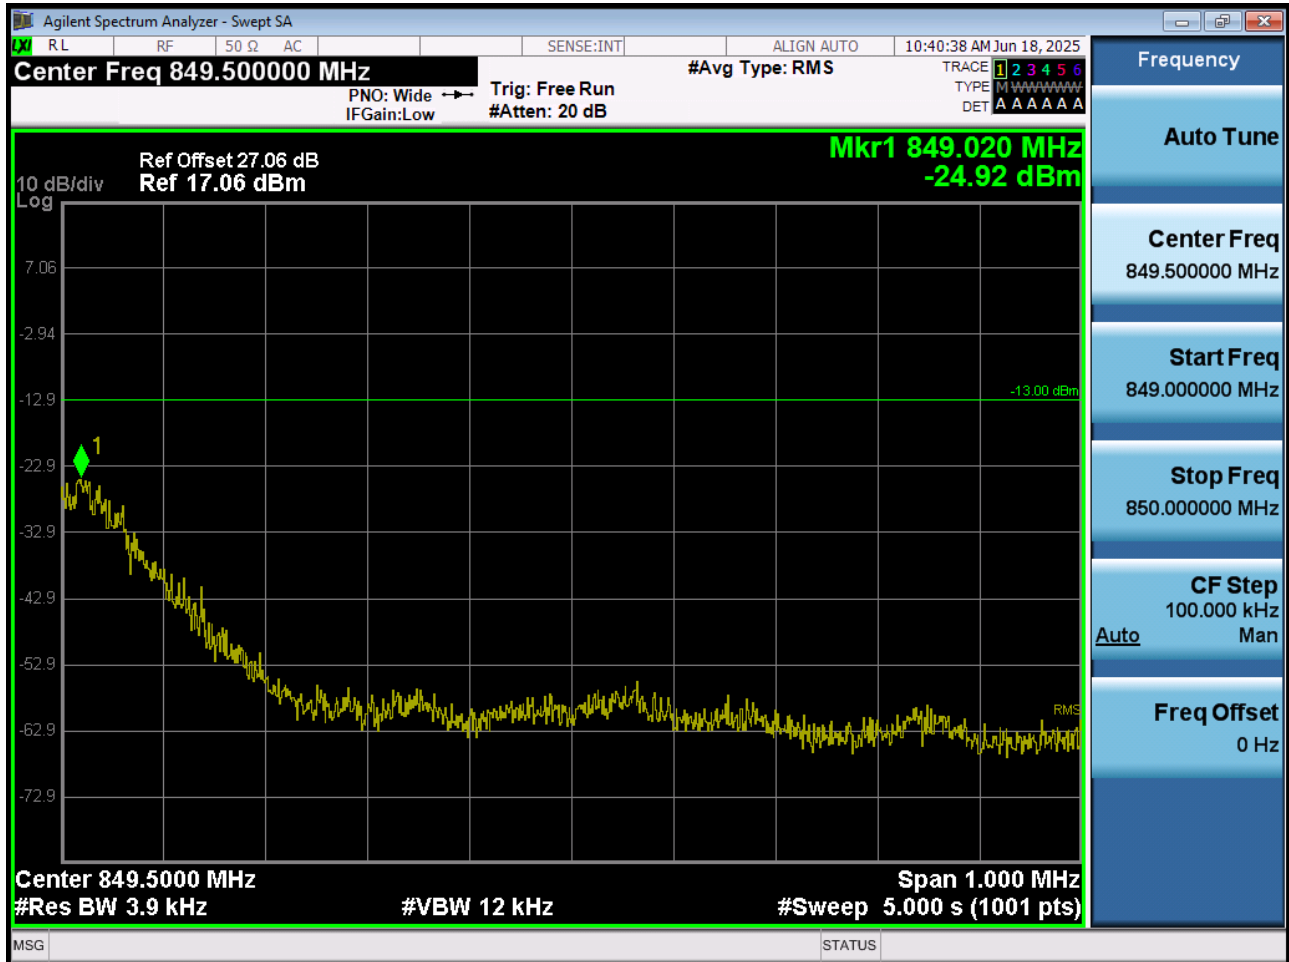


■ GSM850 MODE (251 CH.) Block Edge 3




■ EDGE MODE (128 CH.) Block Edge 1

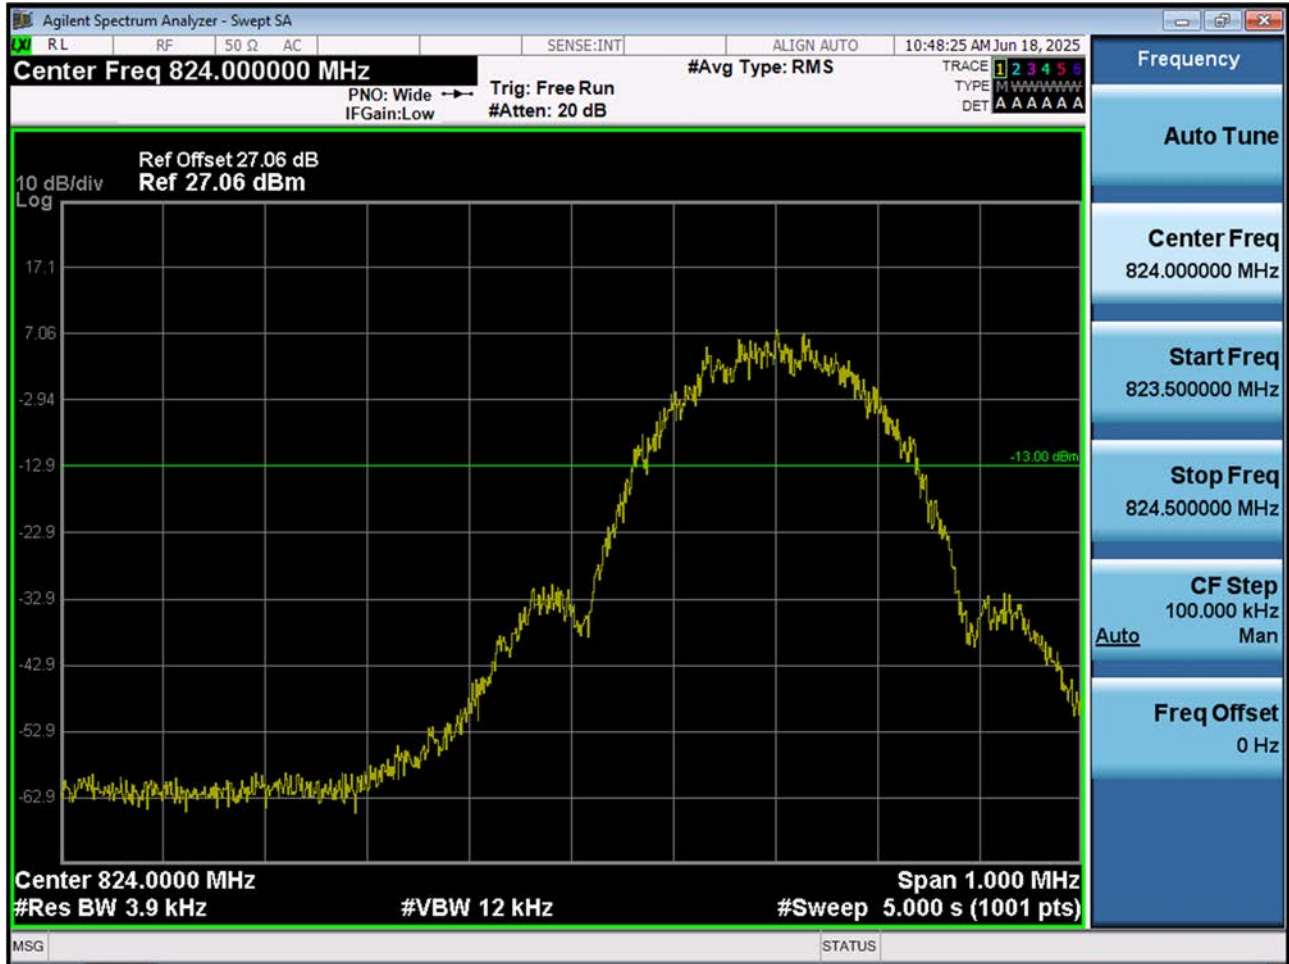


■ EDGE MODE (128 CH.) Block Edge 2

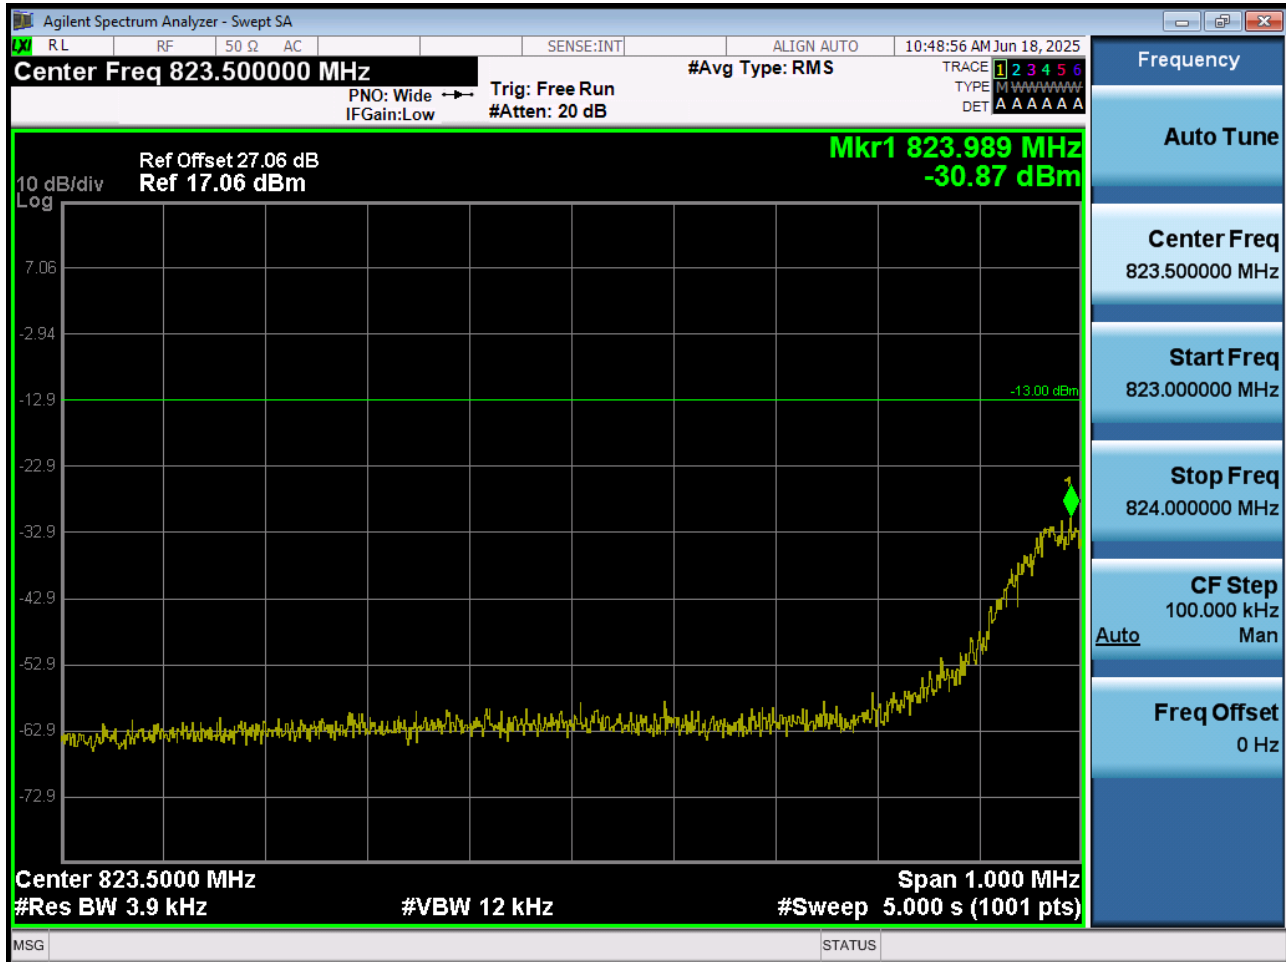


■ EDGE MODE (128 CH.) Block Edge 3

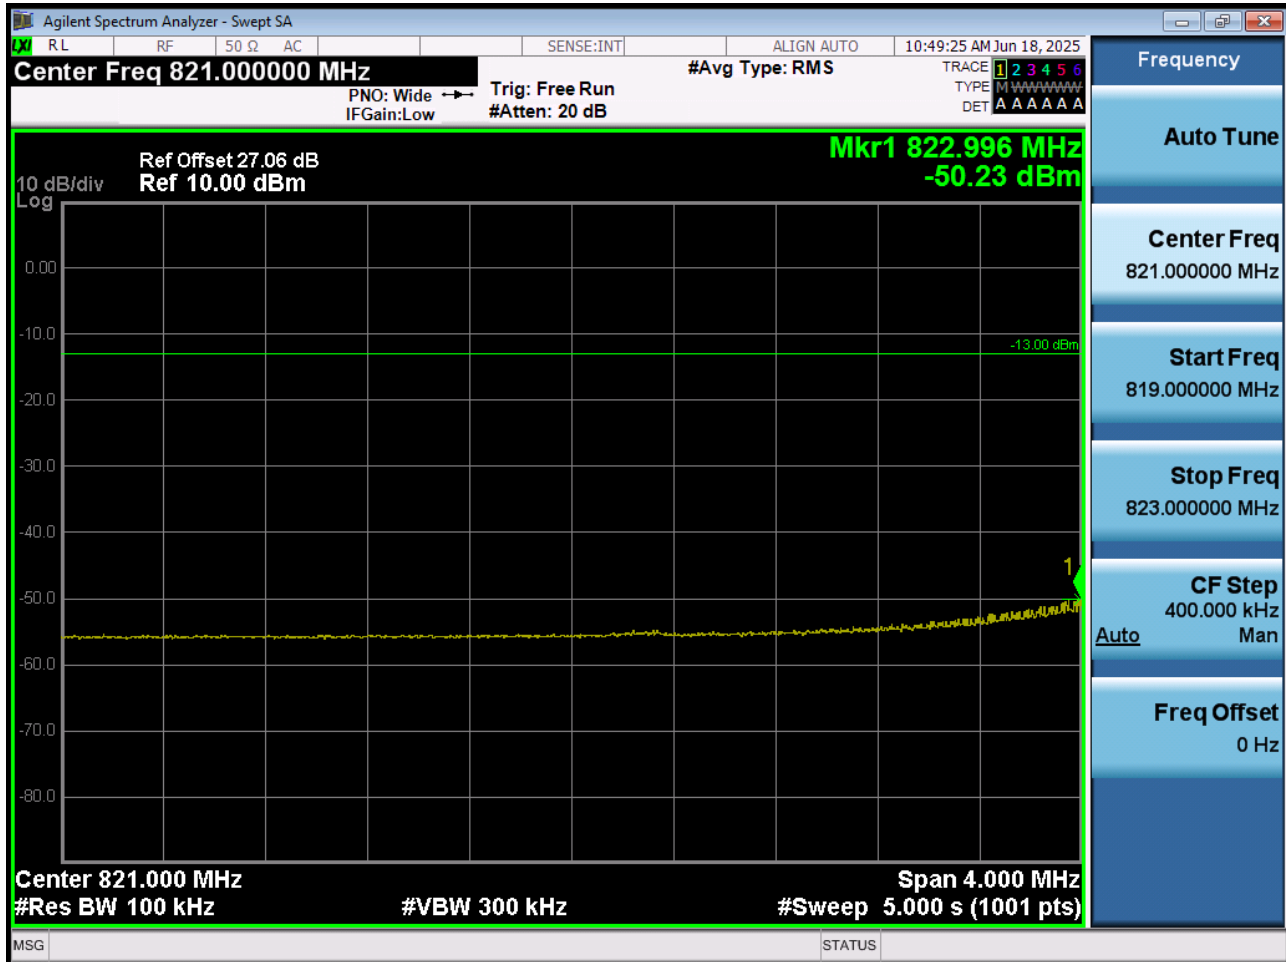


■ EDGE MODE (251 CH.) Block Edge 1

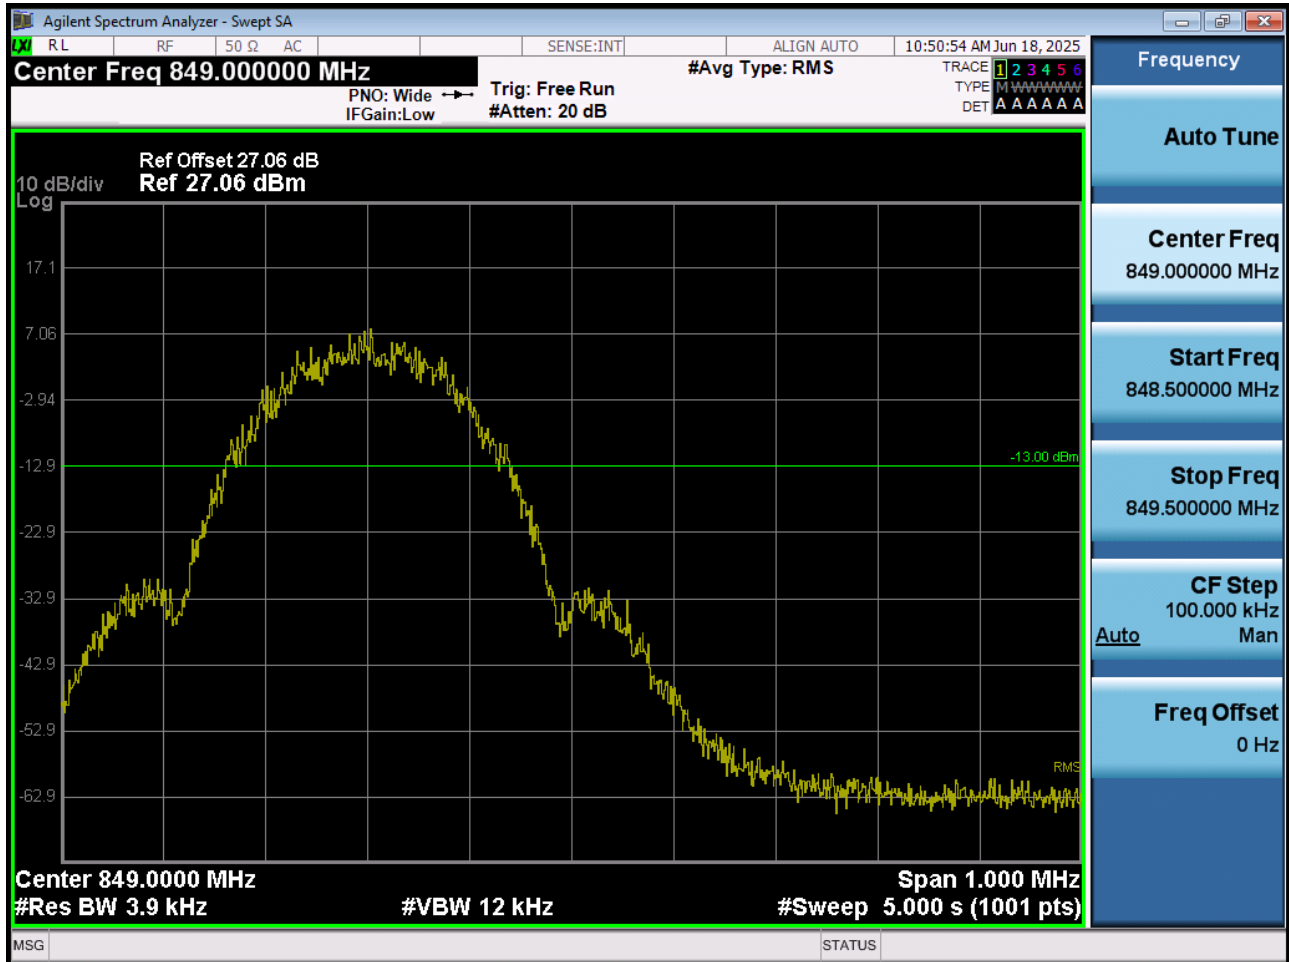


■ EDGE MODE (251 CH.) Block Edge 2

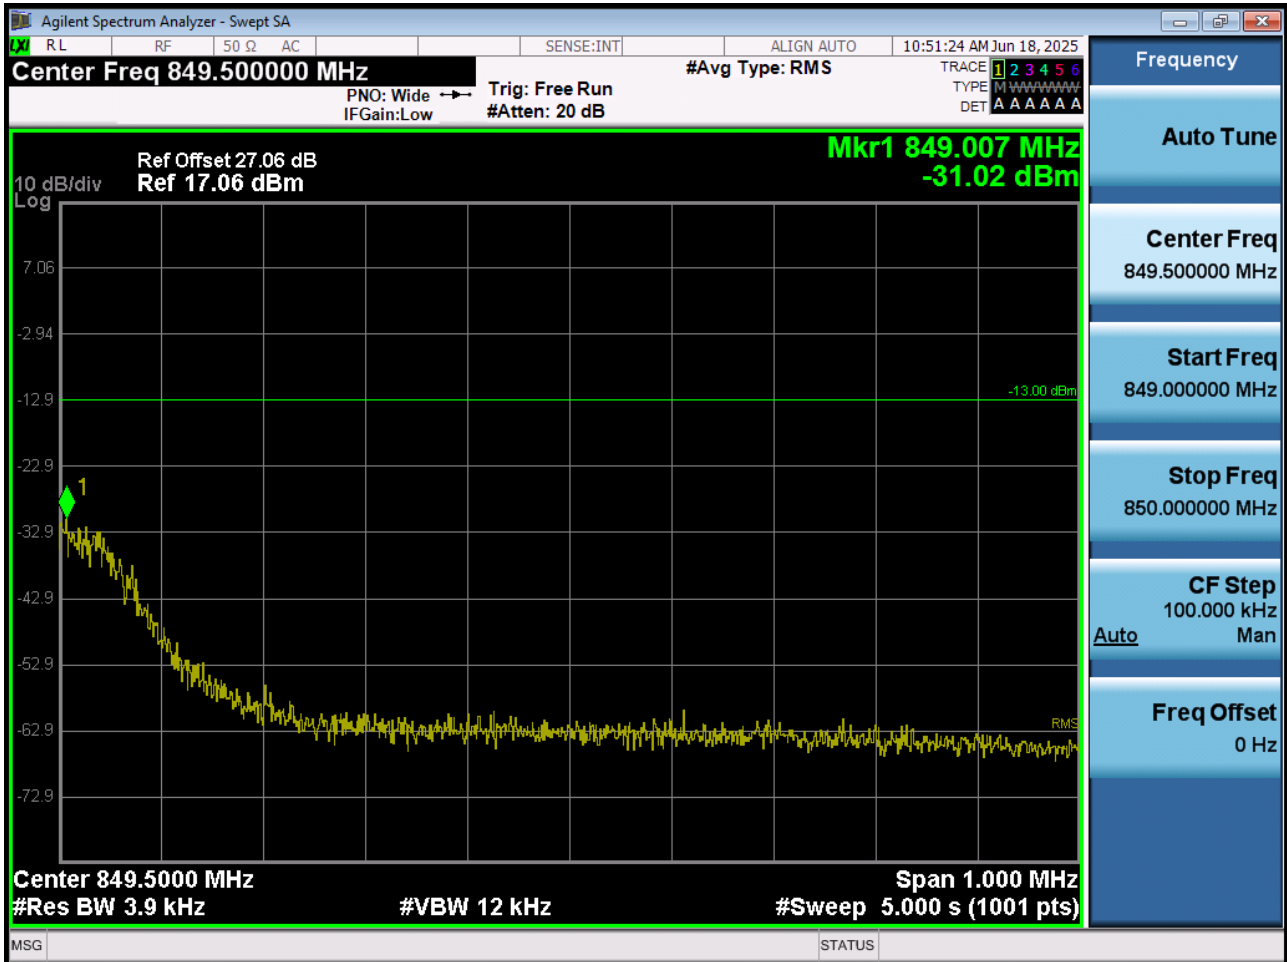


■ EDGE MODE (251 CH.) Block Edge 3

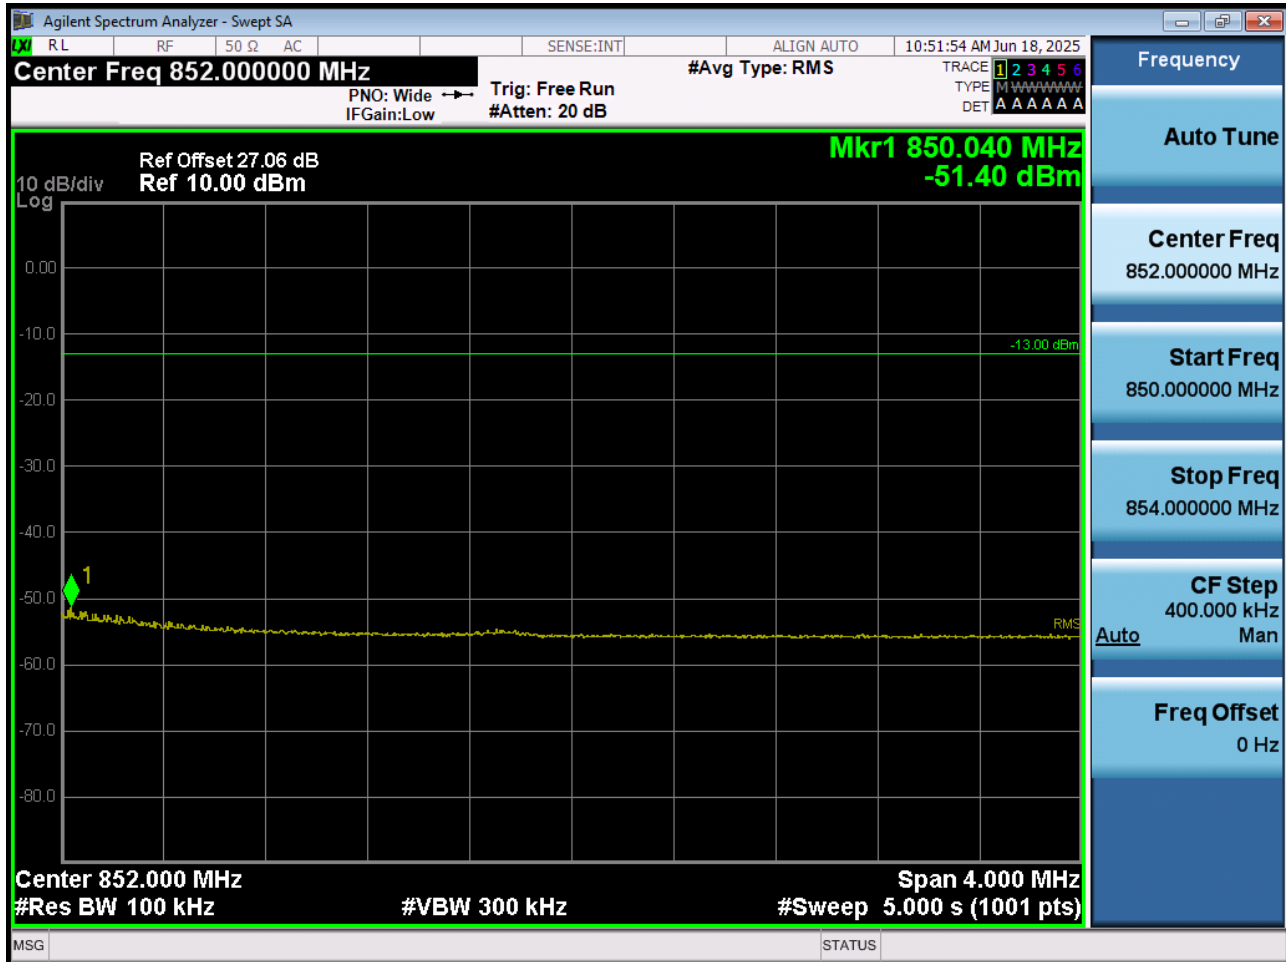

■ GSM1900 MODE (512 CH.) Block Edge 1

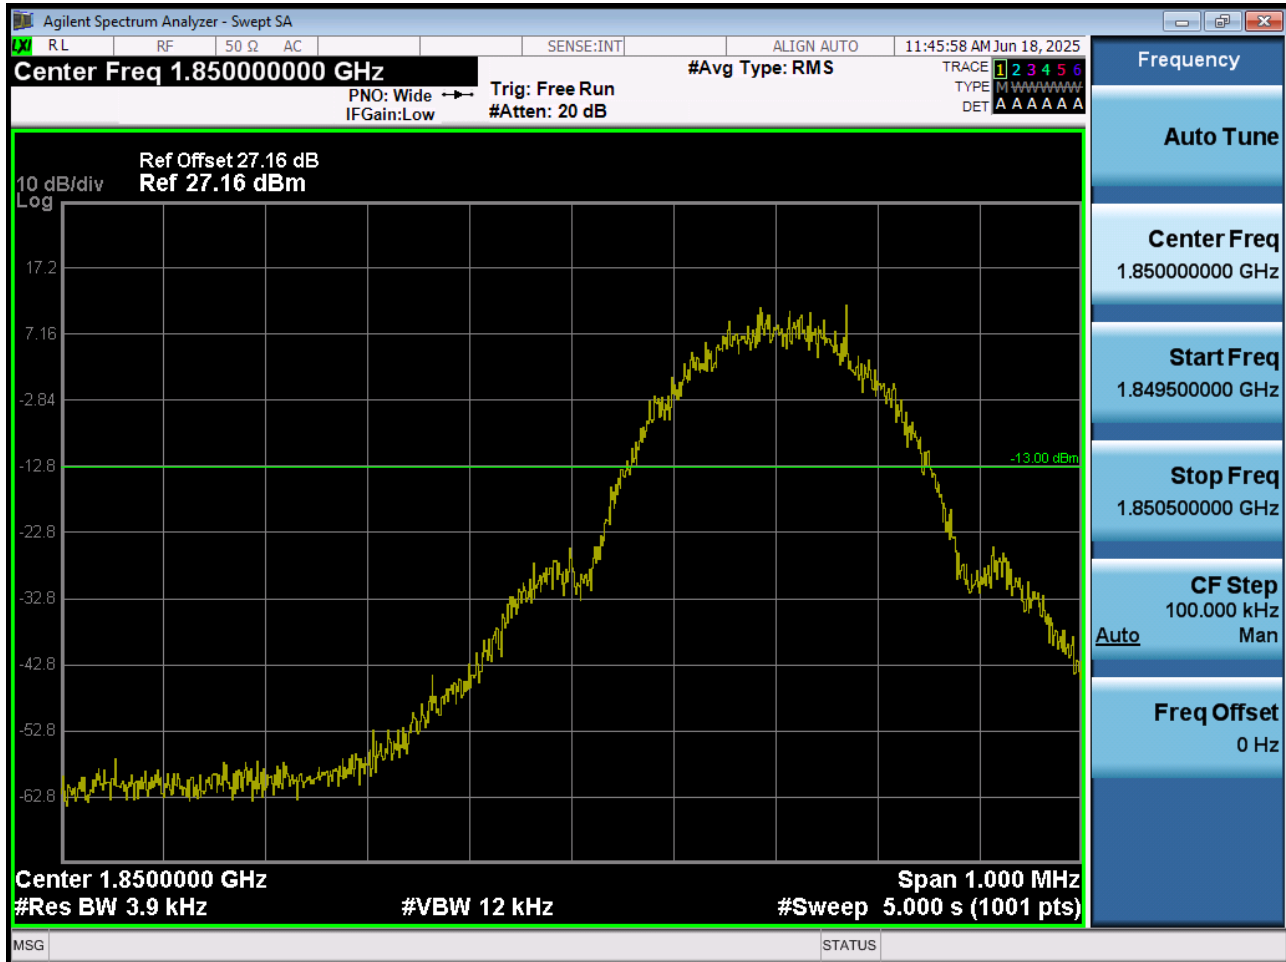

■ GSM1900 MODE (512 CH.) Block Edge 2

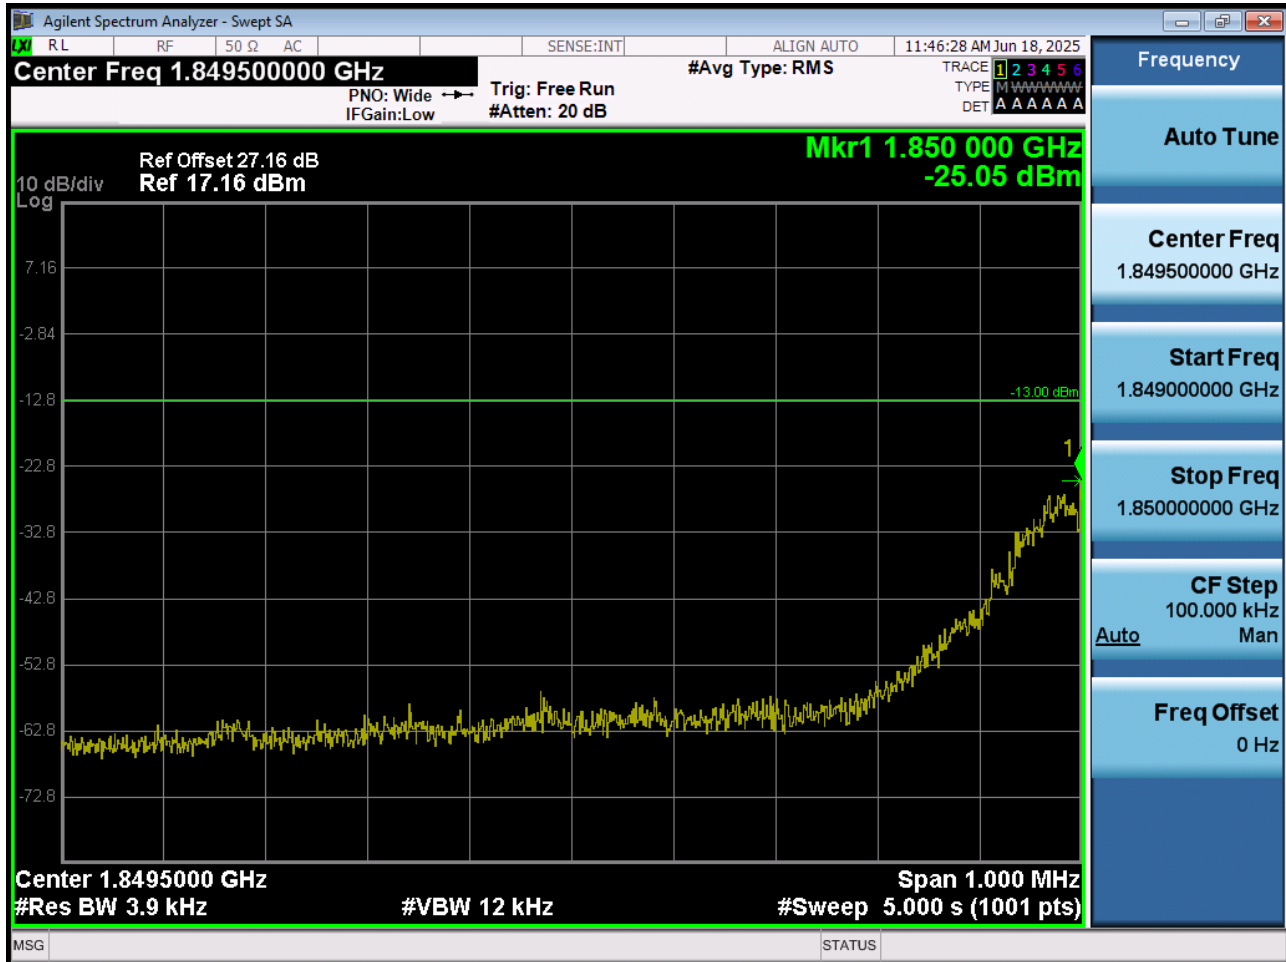


■ GSM1900 MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.25 \text{ dBm} + 10 \text{ dB} = -41.25 \text{ dBm}$$

■ GSM1900 MODE (810 CH.) Block Edge 1

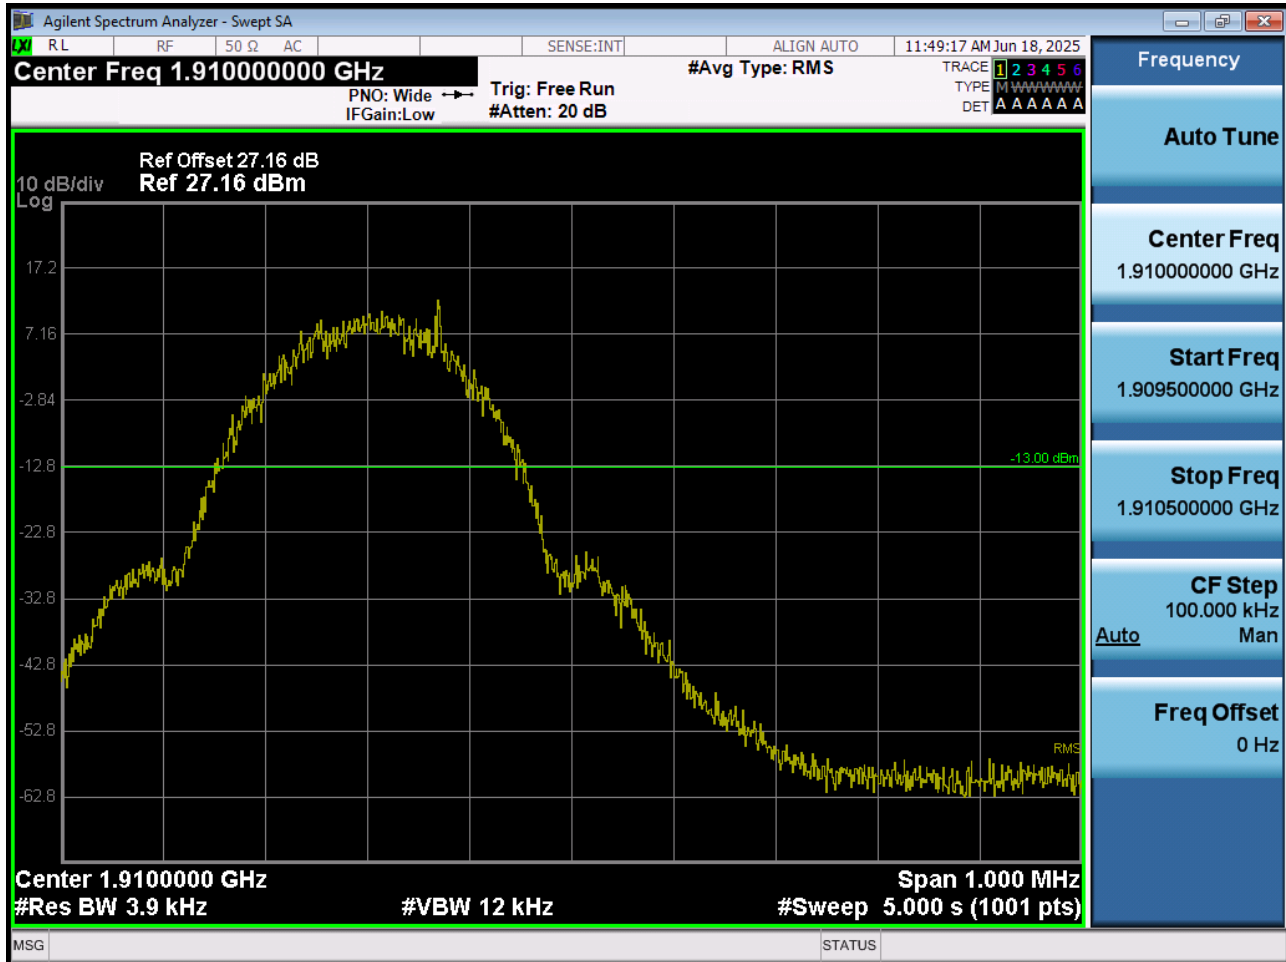

■ GSM1900 MODE (810 CH.) Block Edge 2

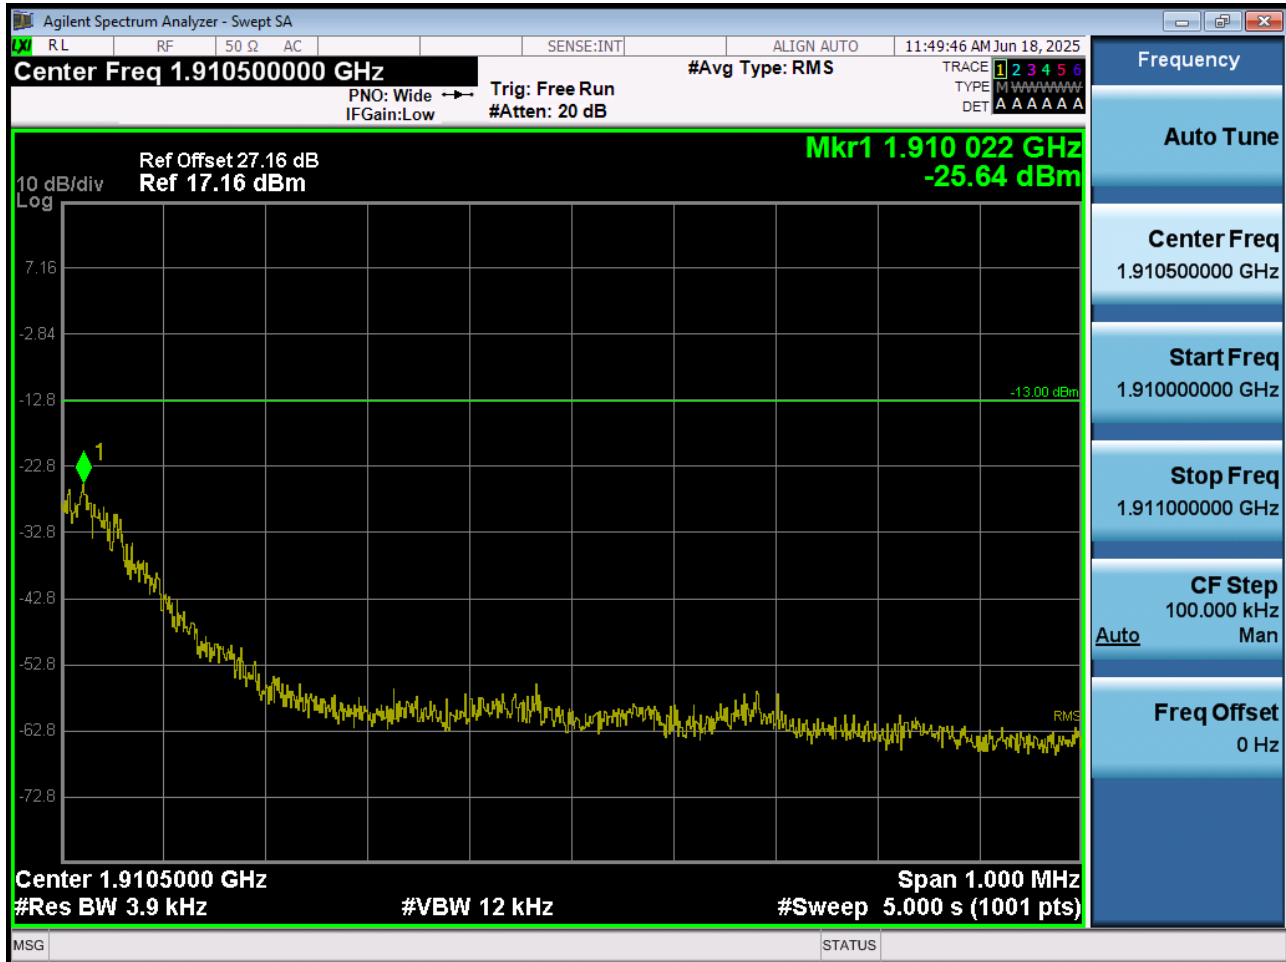


■ GSM1900 MODE (810 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -48.96 \text{ dBm} + 10 \text{ dB} = -38.96 \text{ dBm}$$

■ EDGE MODE (512 CH.) Block Edge 1

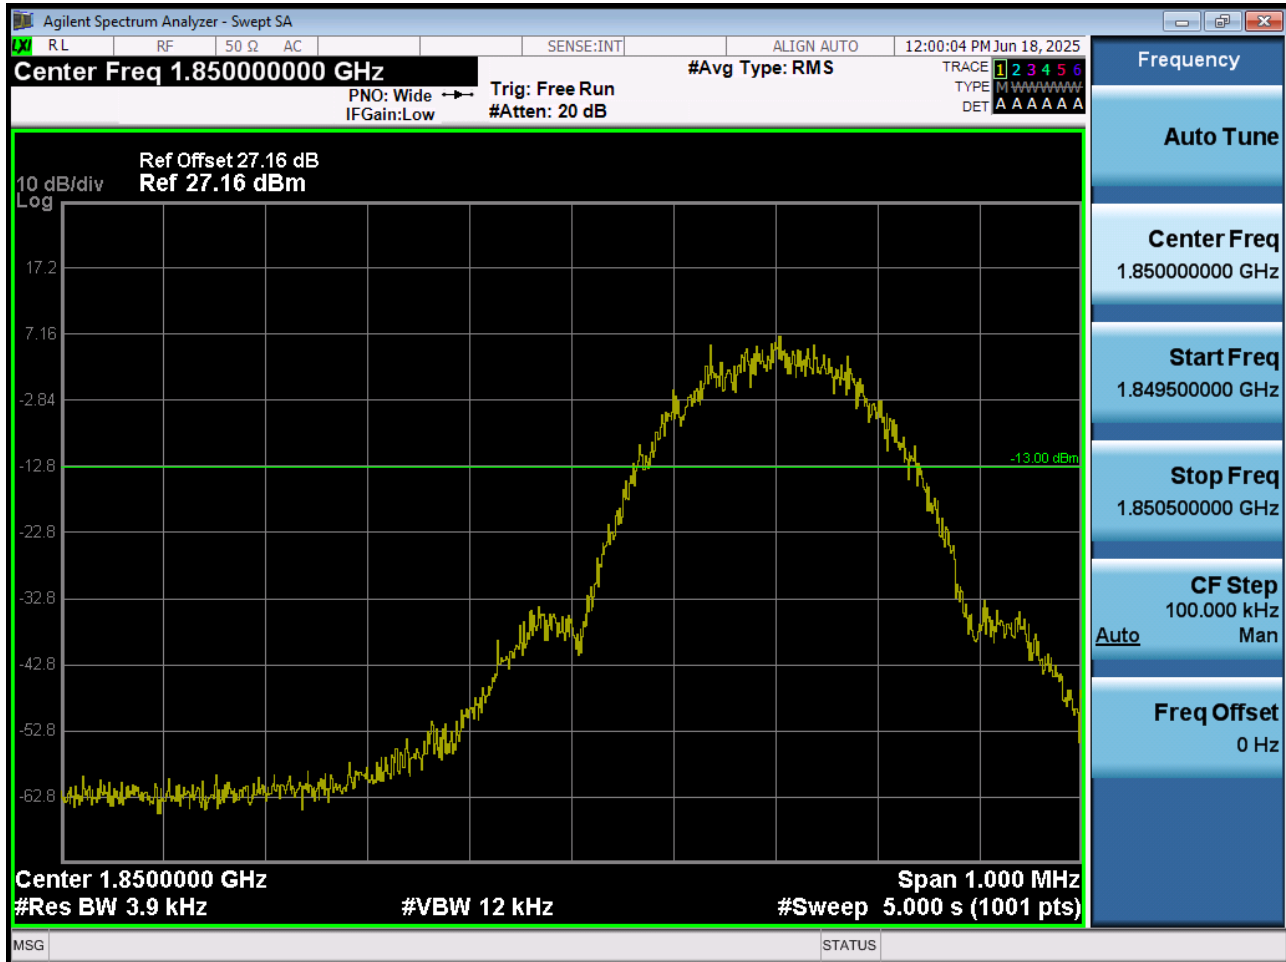

■ EDGE MODE (512 CH.) Block Edge 2

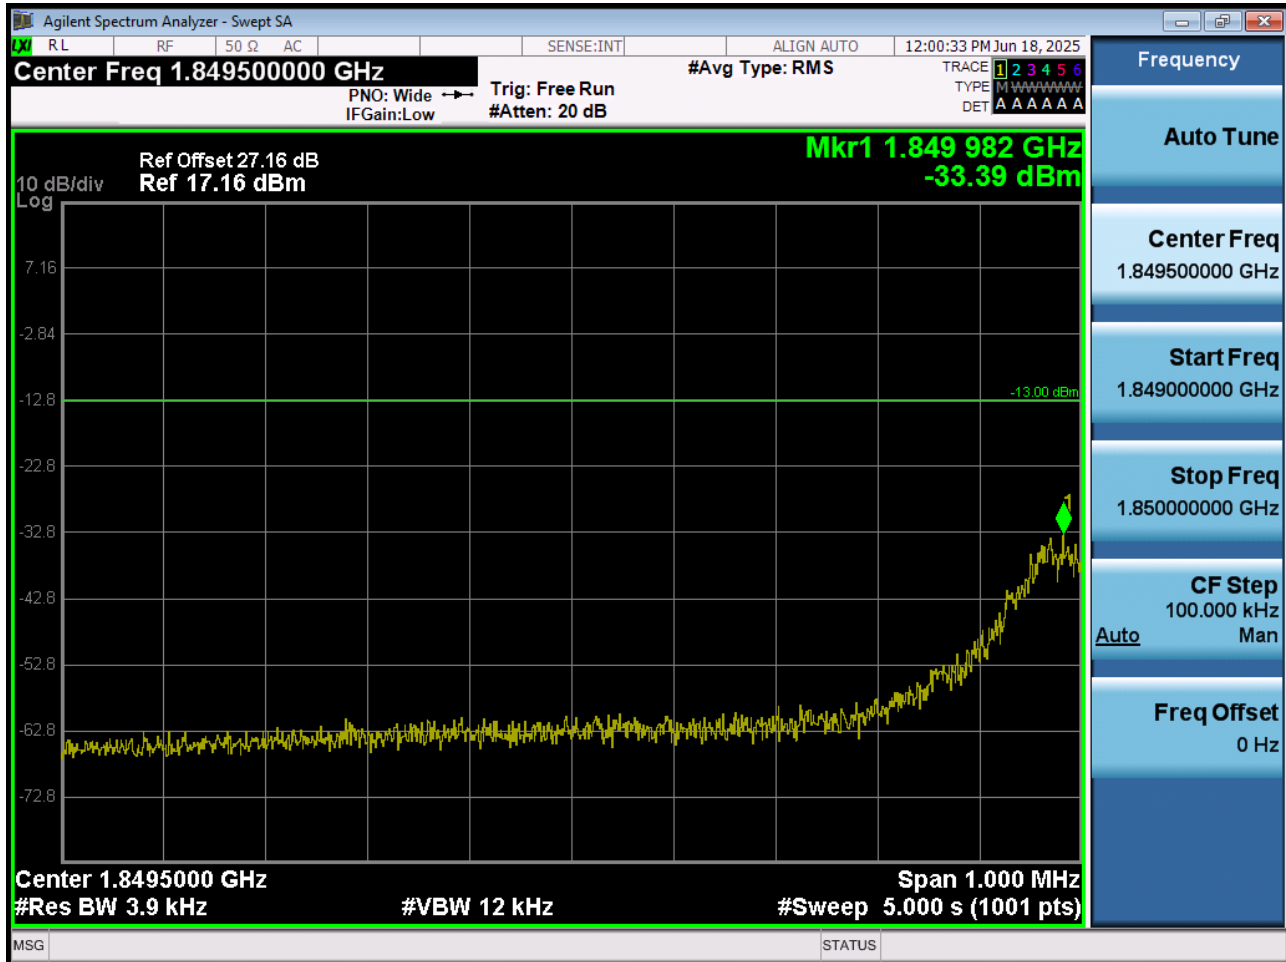


■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.86 \text{ dBm} + 10 \text{ dB} = -41.86 \text{ dBm}$$

■ EDGE MODE (810 CH.) Block Edge 1

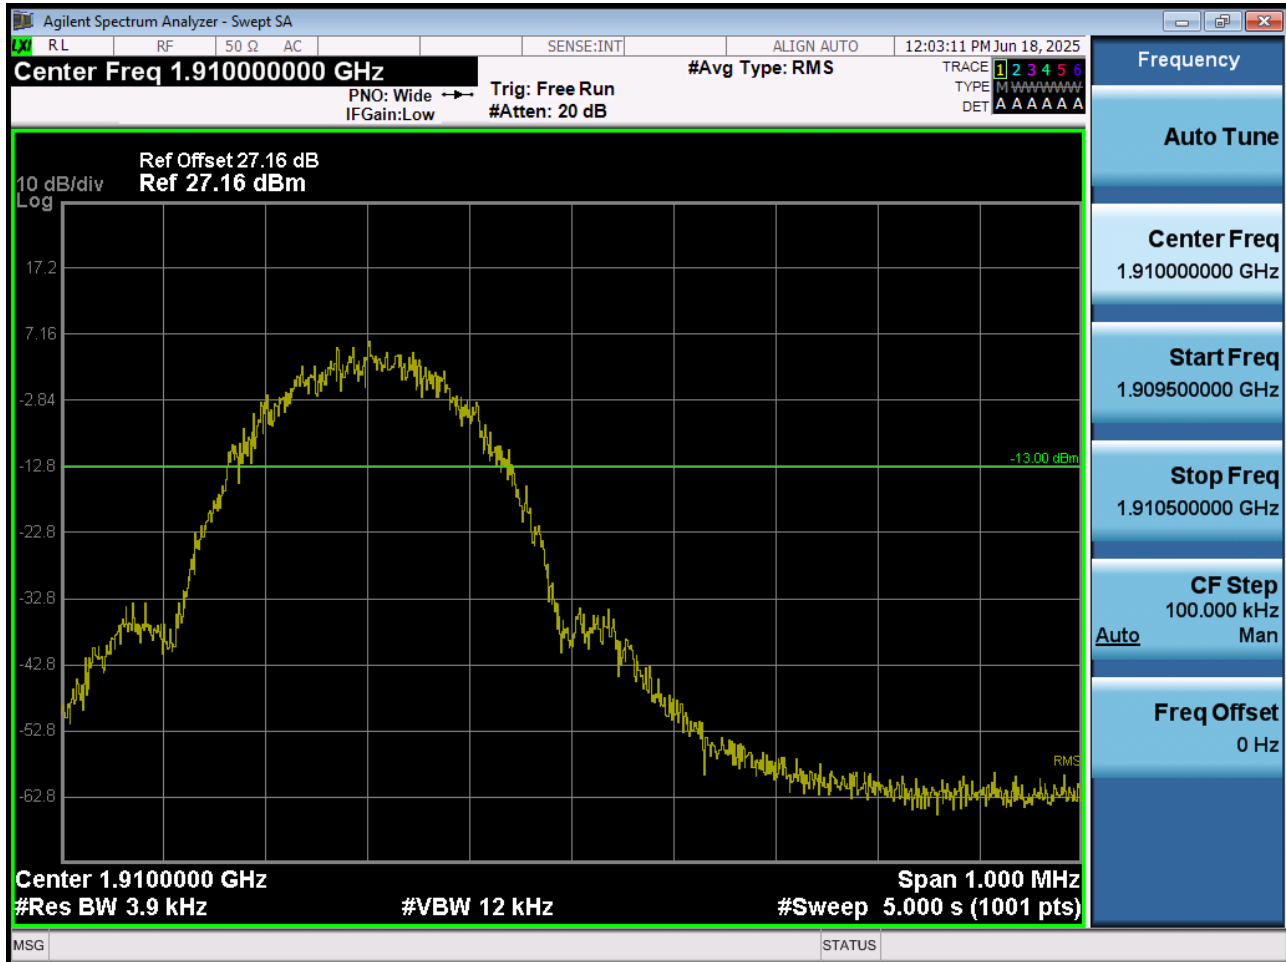

■ EDGE MODE (810 CH.) Block Edge 2

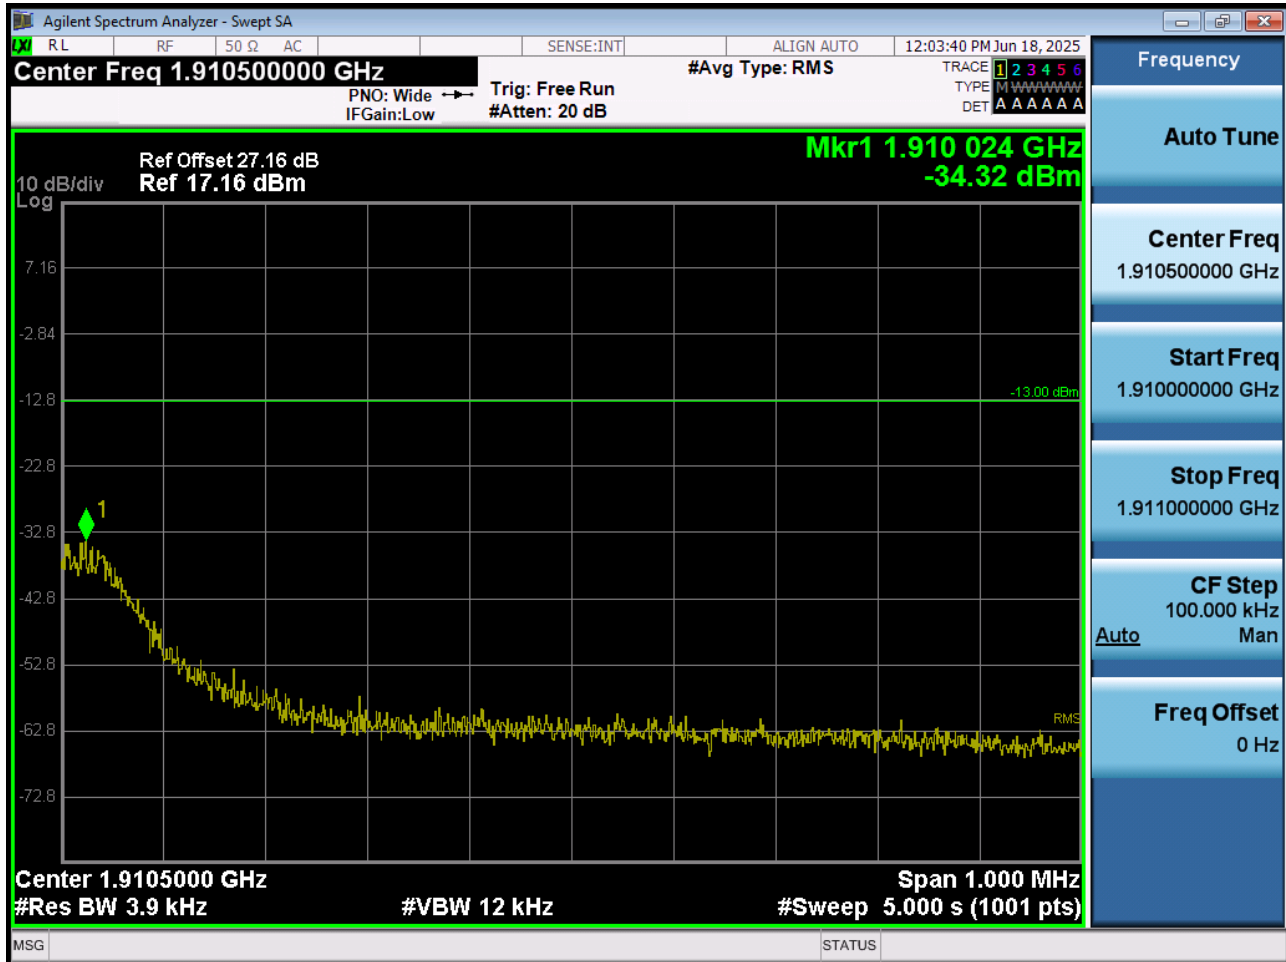

EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.22 \text{ dBm} + 10 \text{ dB} = -41.22 \text{ dBm}$$

■ WCDMA850 MODE (4132 CH.) Block Edge



WCDMA850 MODE (4132 CH.) – 4 MHz Span




■ WCDMA850MODE (4233 CH.) Block Edge




■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge

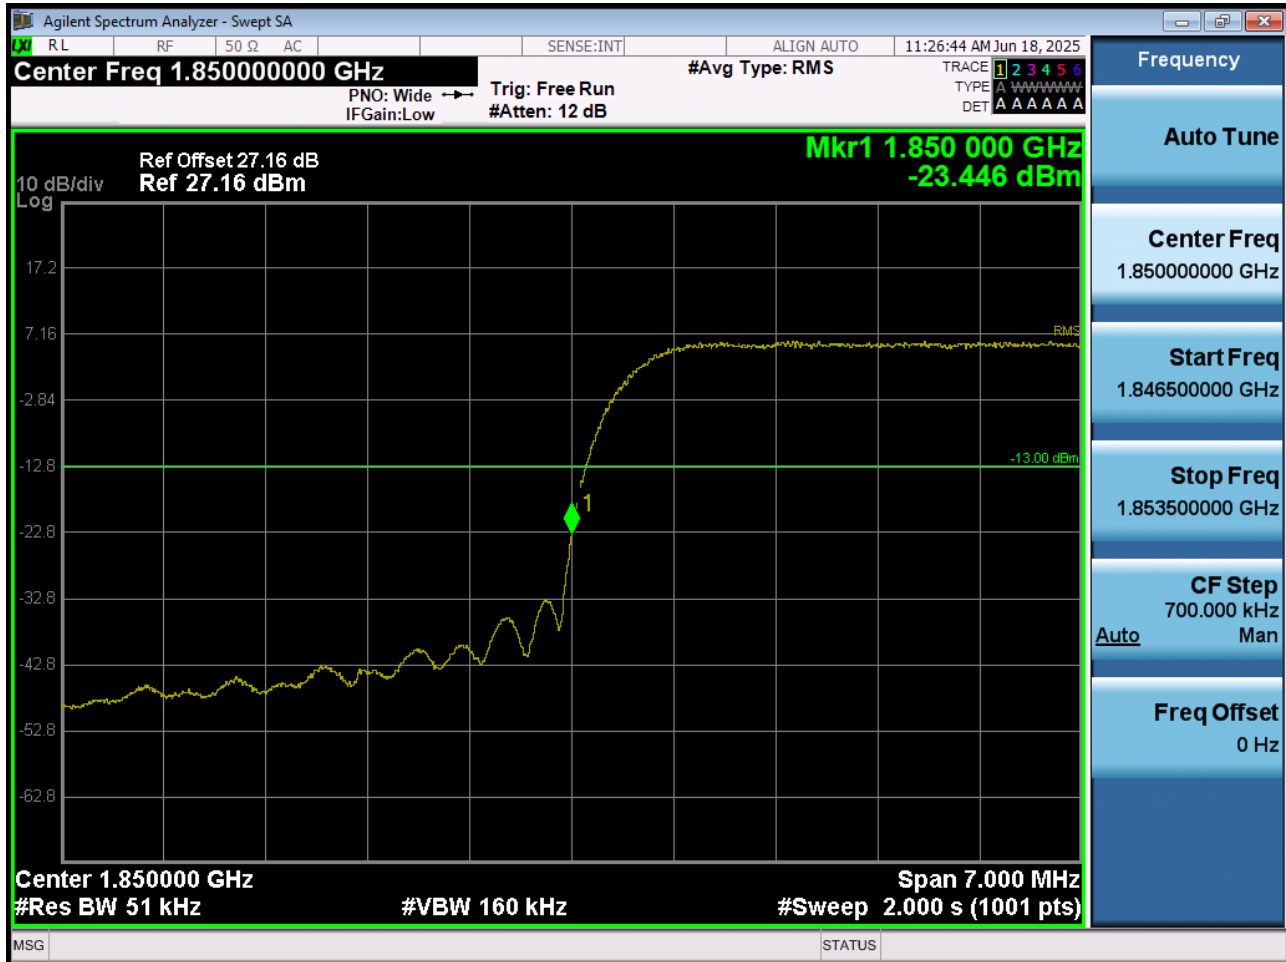

■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

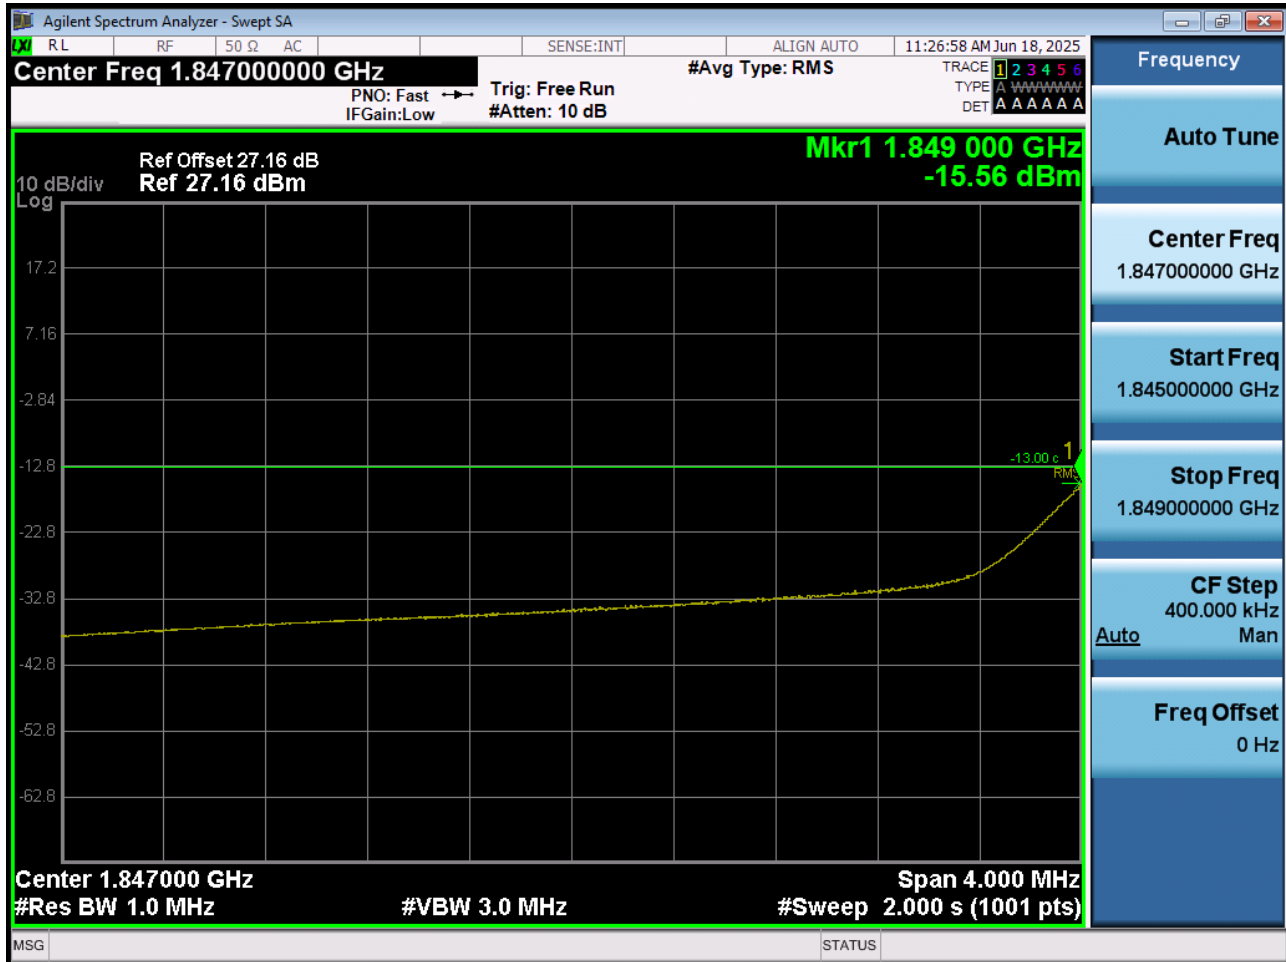

WCDMA1900 MODE (9538 CH.) Block Edge



■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

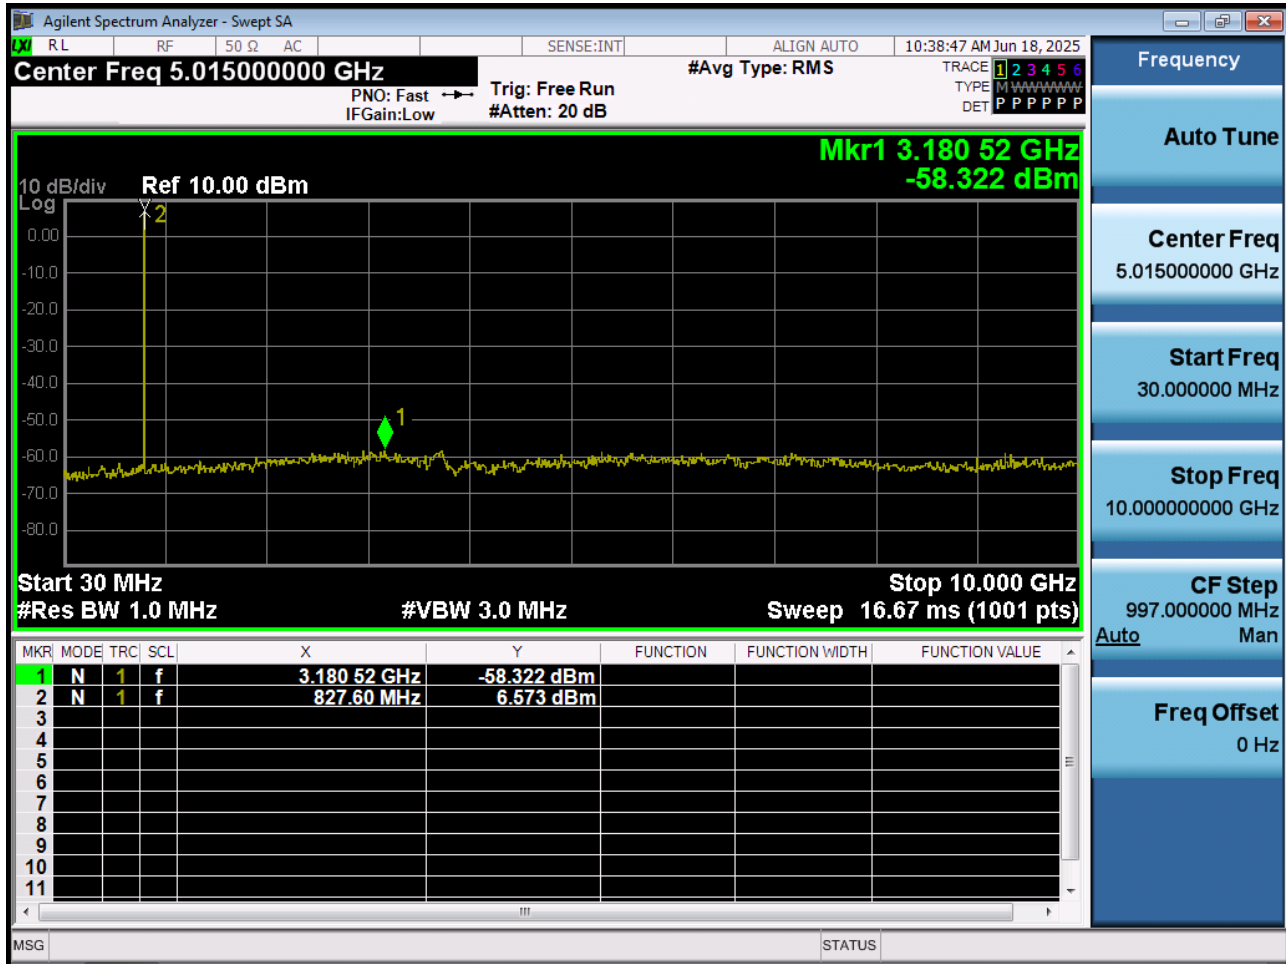


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

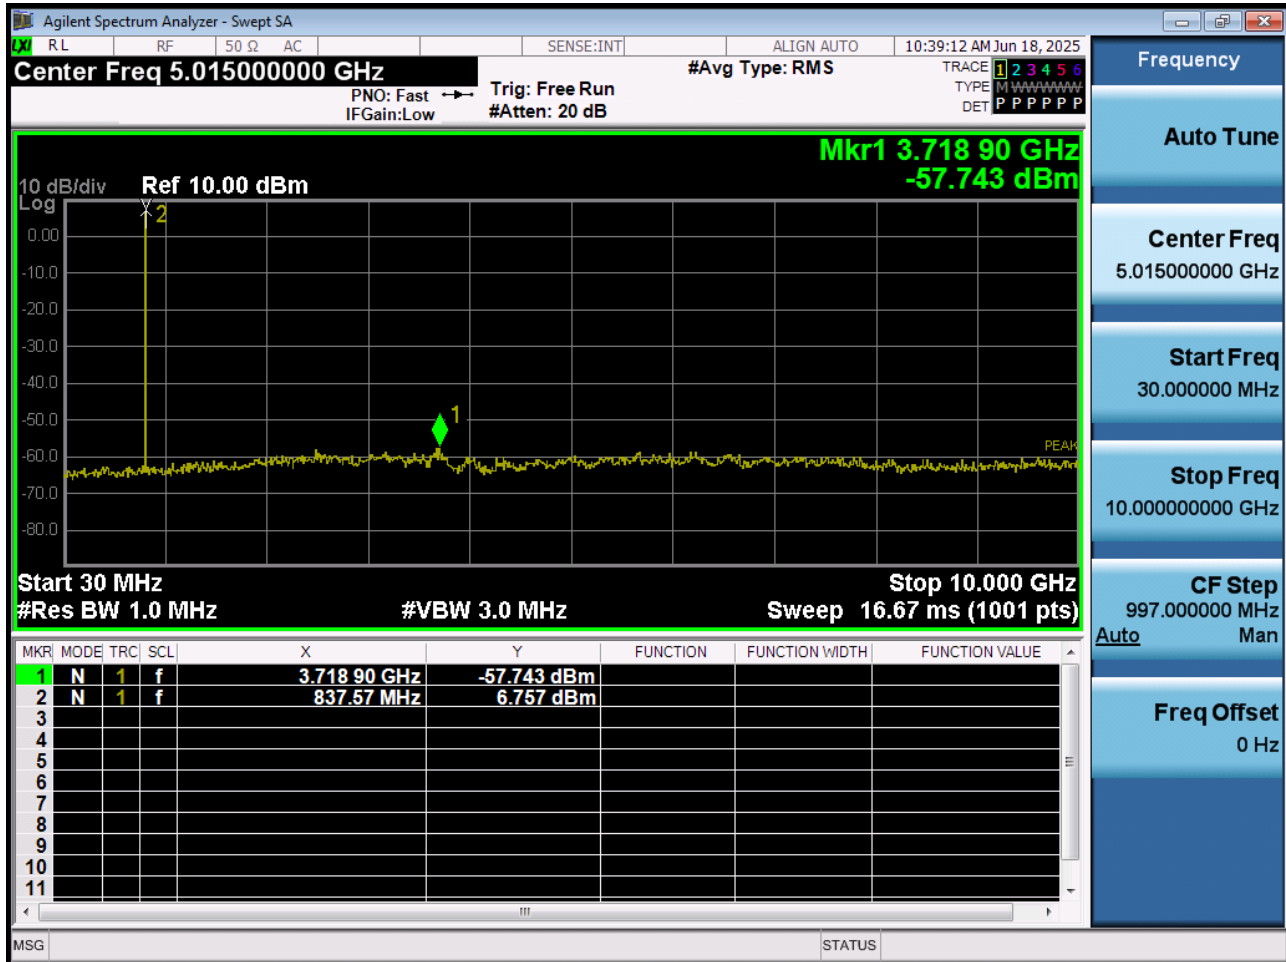

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

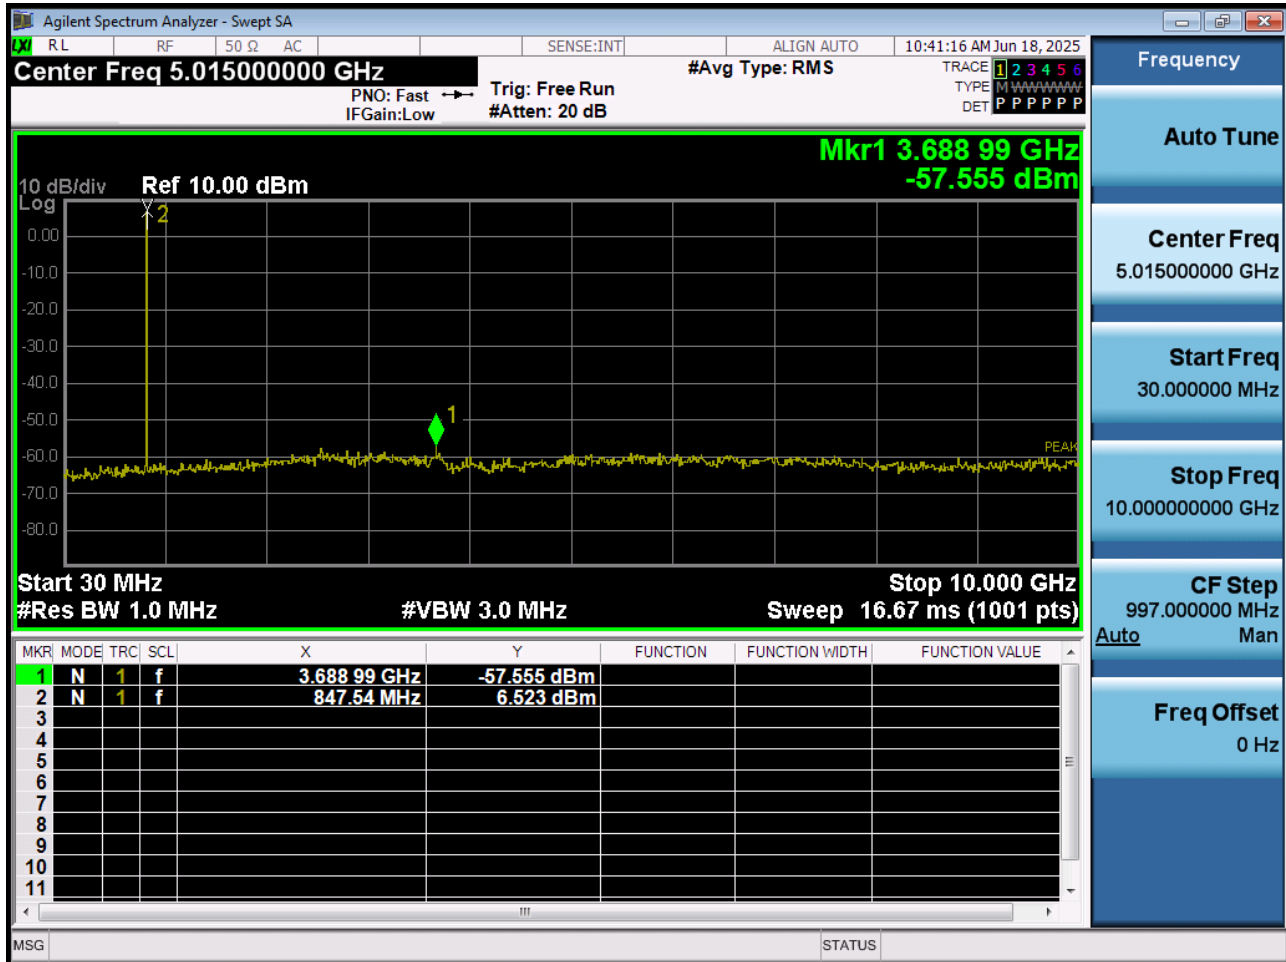

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

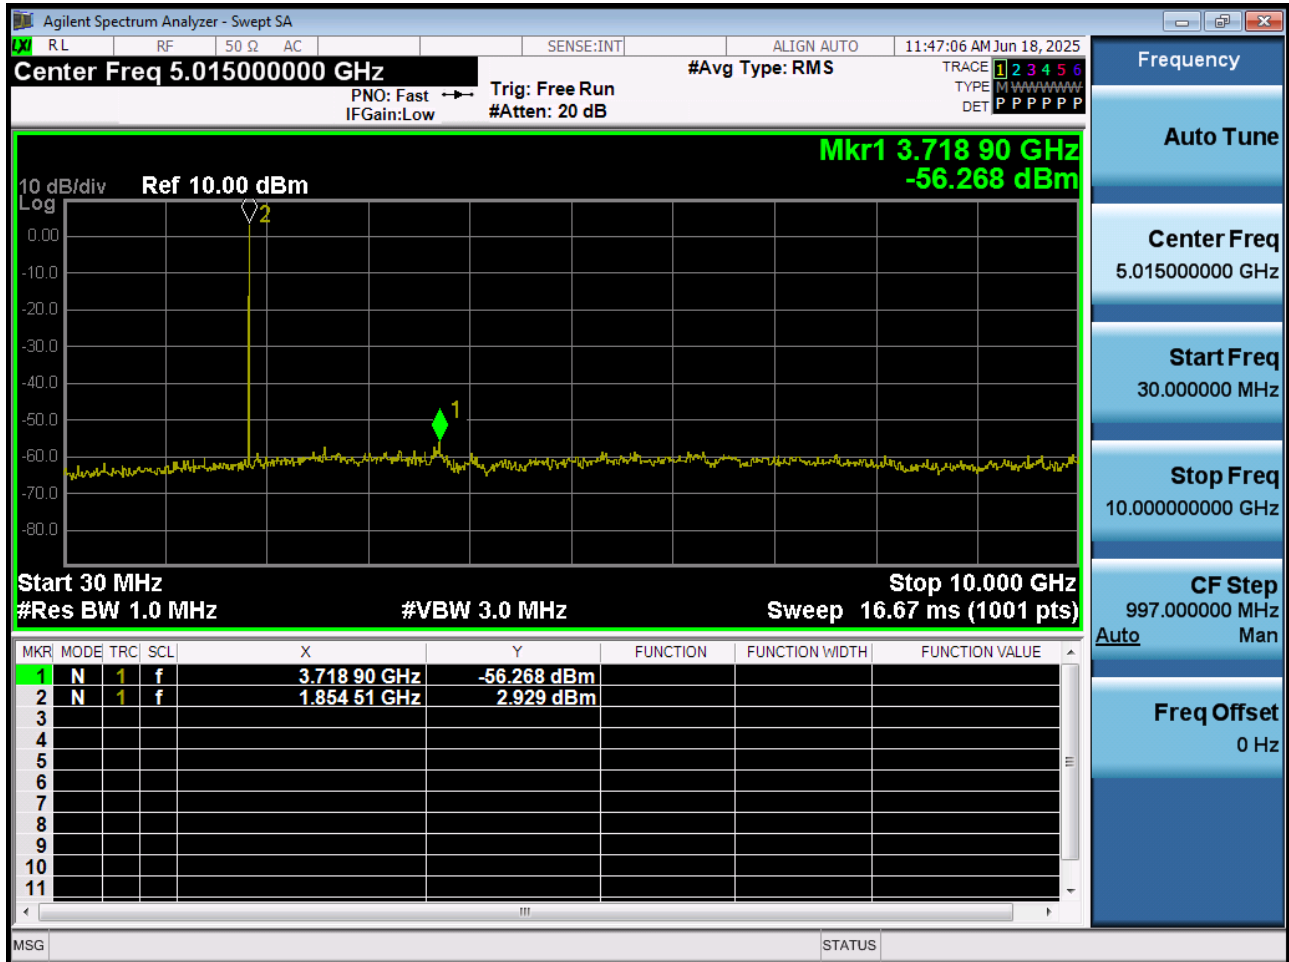

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

10 dB/div Ref 10.00 dBm

Start 10.000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 25.00 ms (1001 pts)

Mkr1 19.21 GHz
-53.008 dBm

Trig: Free Run

#Atten: 20 dB

#Avg Type: RMS

Frequency

Auto Tune

Center Freq
15.00000000 GHz


Start Freq
10.00000000 GHz

Stop Freq
20.00000000 GHz

CF Step
1.00000000 GHz

Freq Offset
0 Hz


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

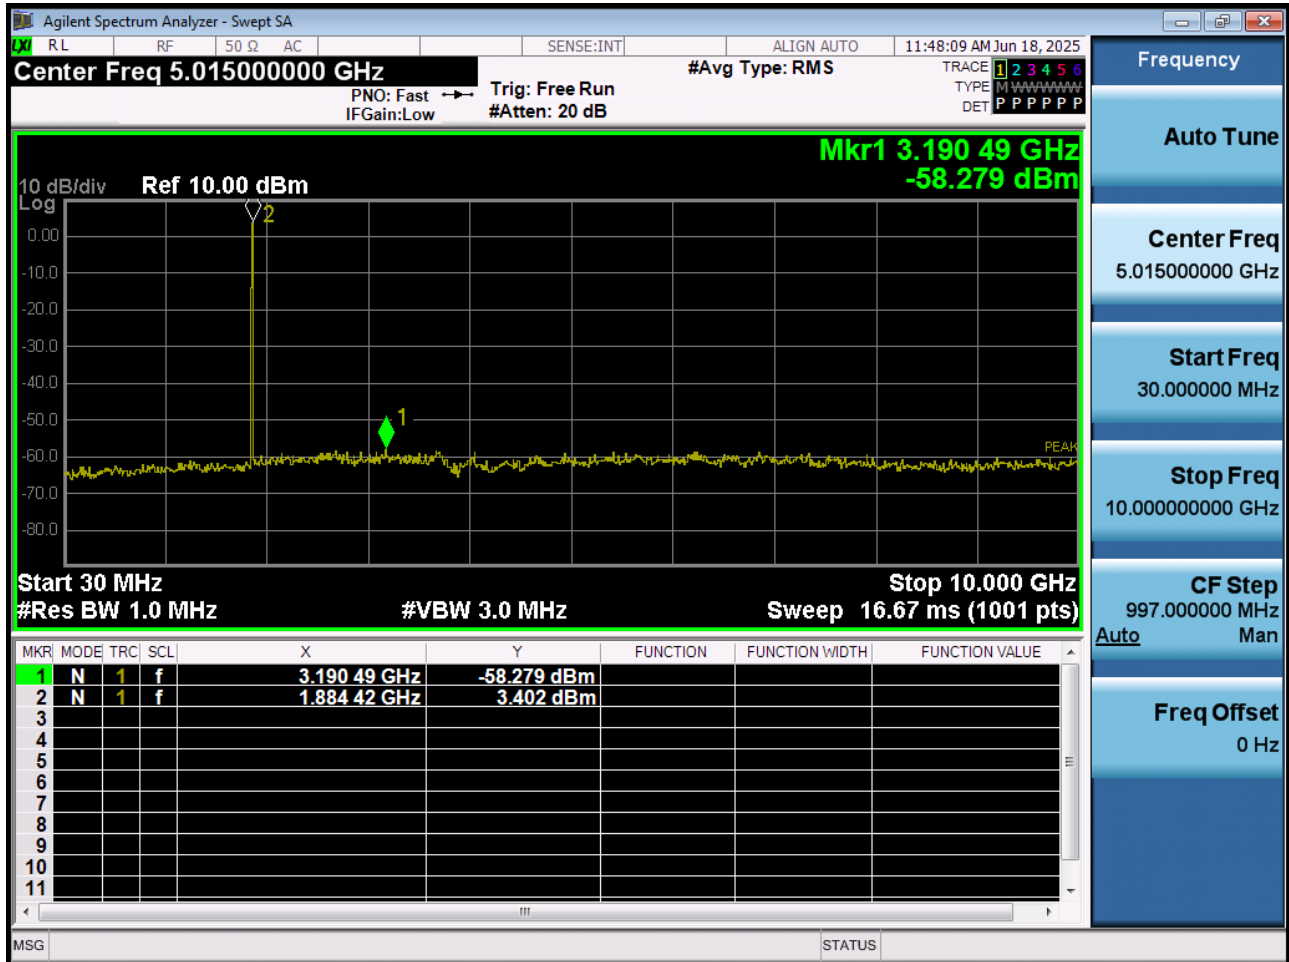

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2




■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

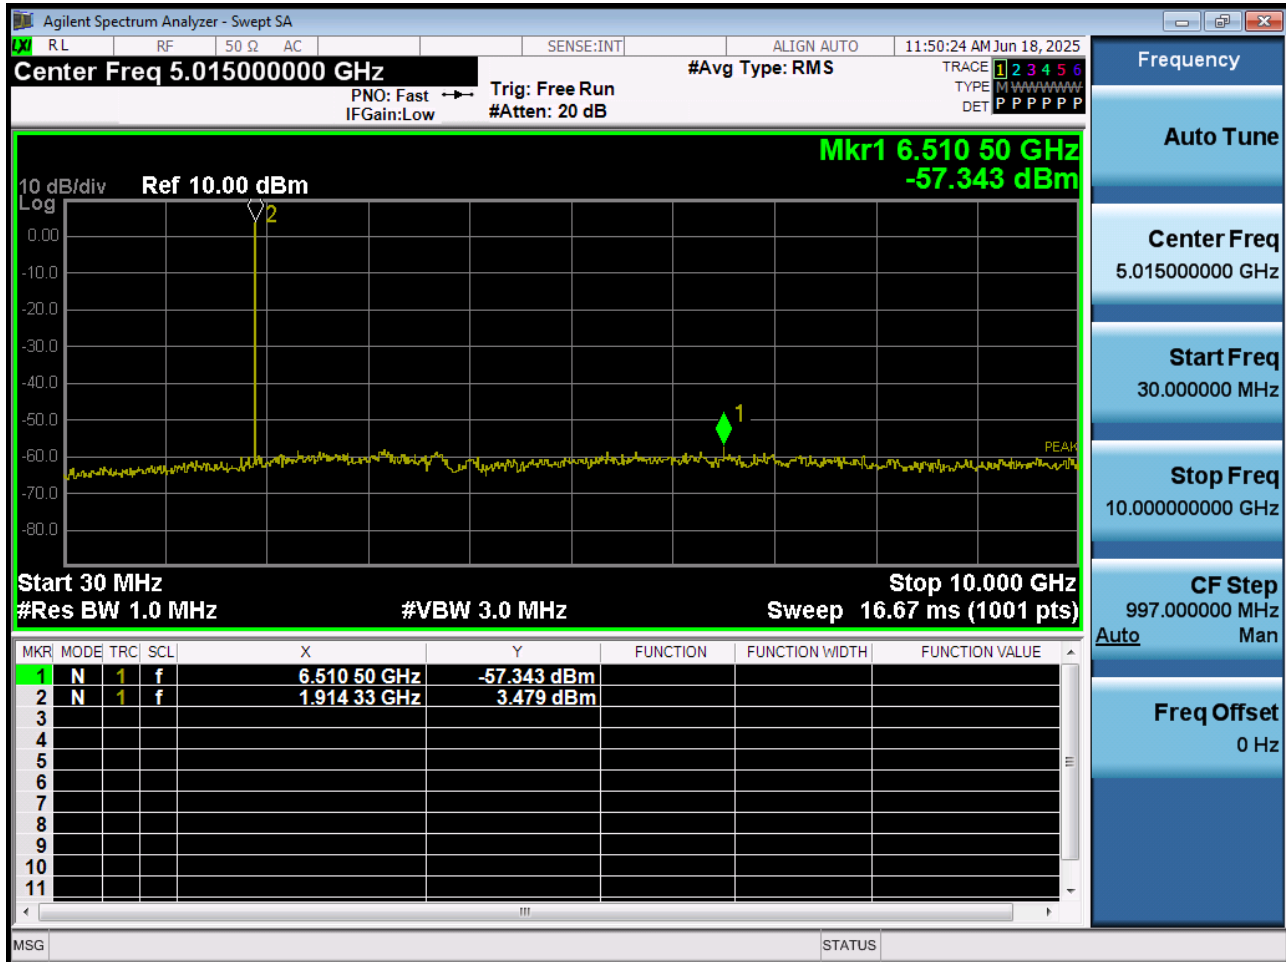


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2




■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

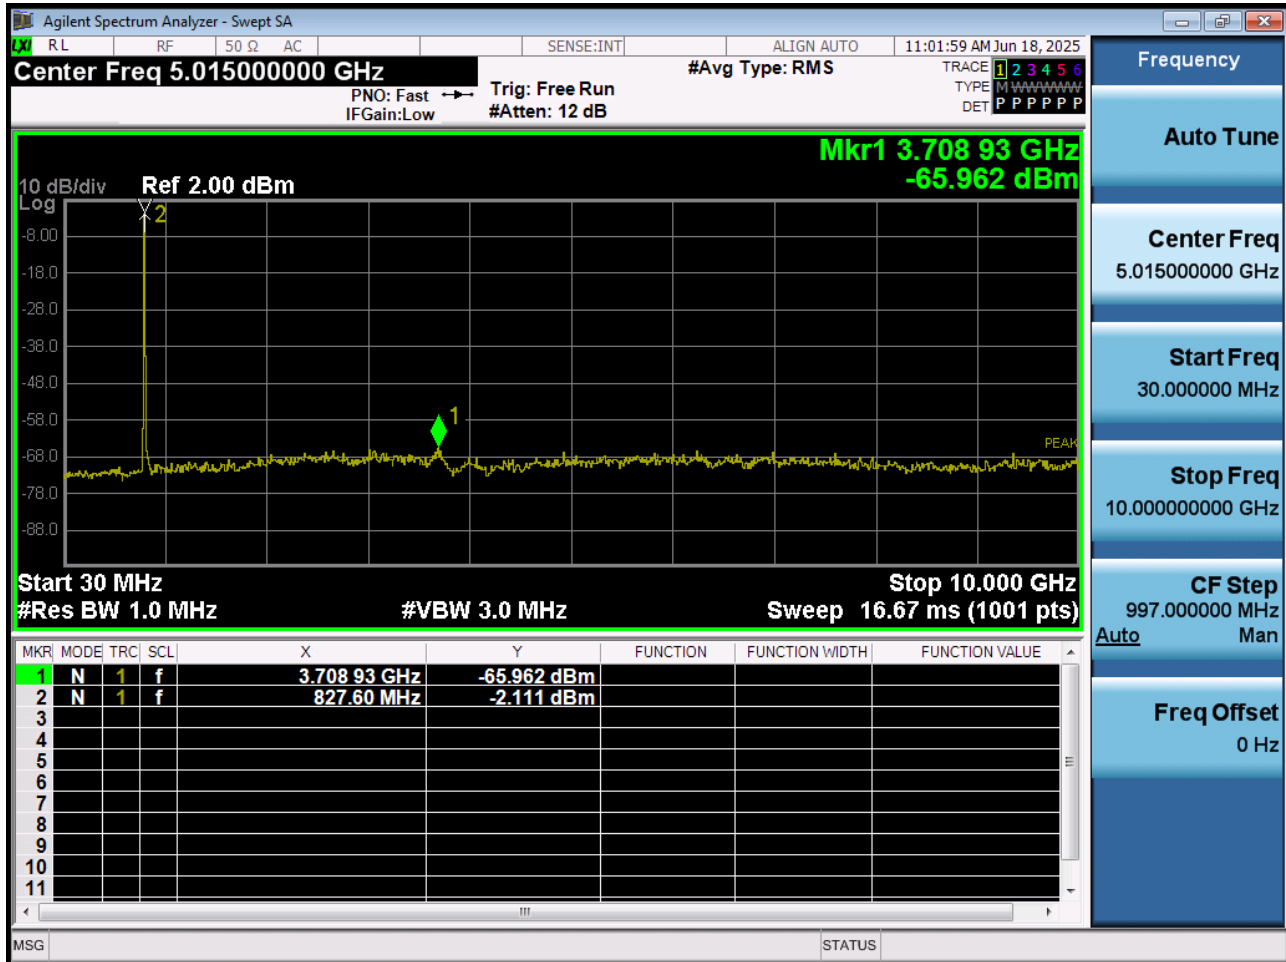


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

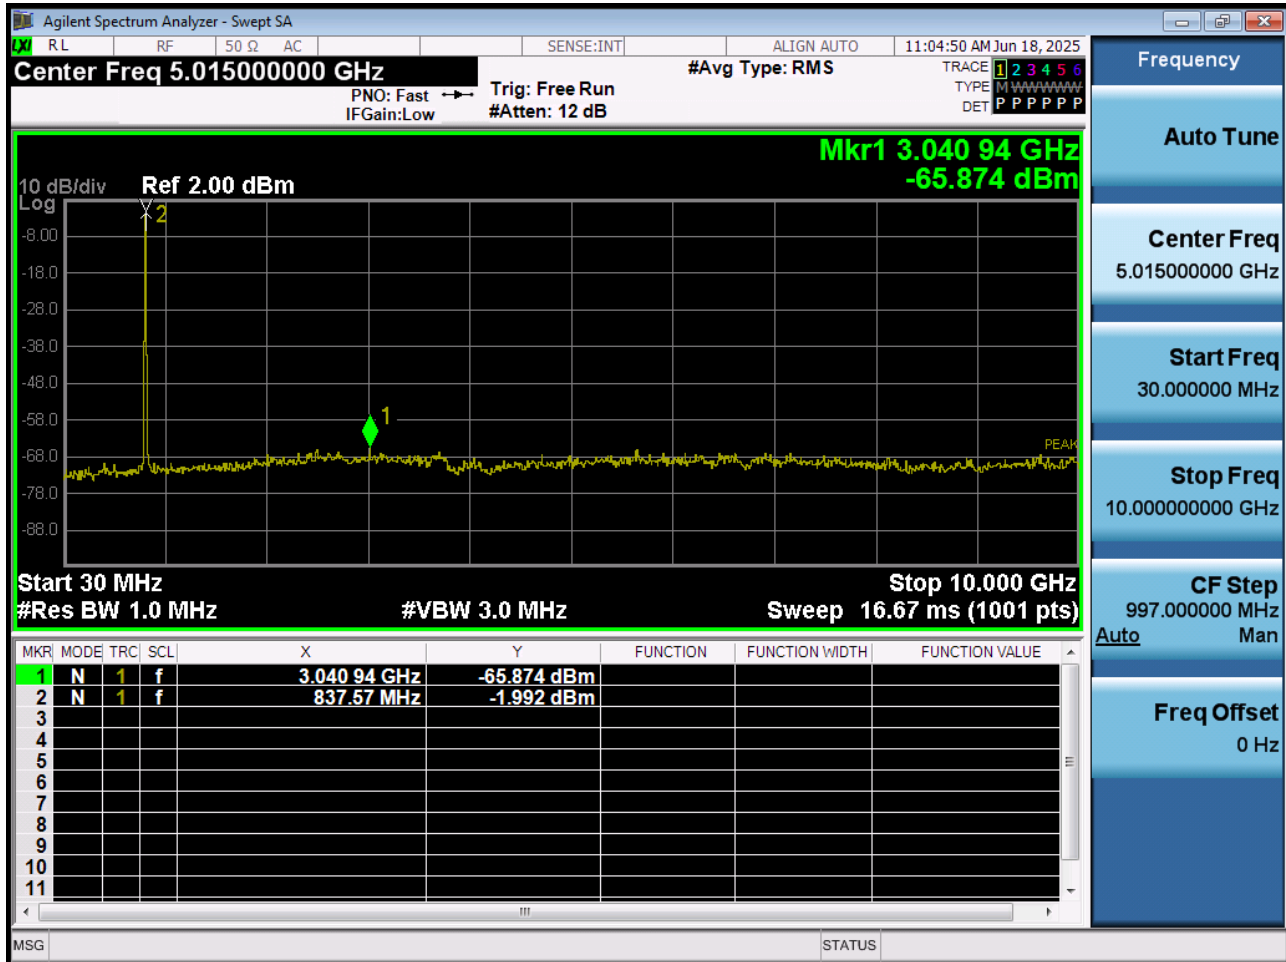

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

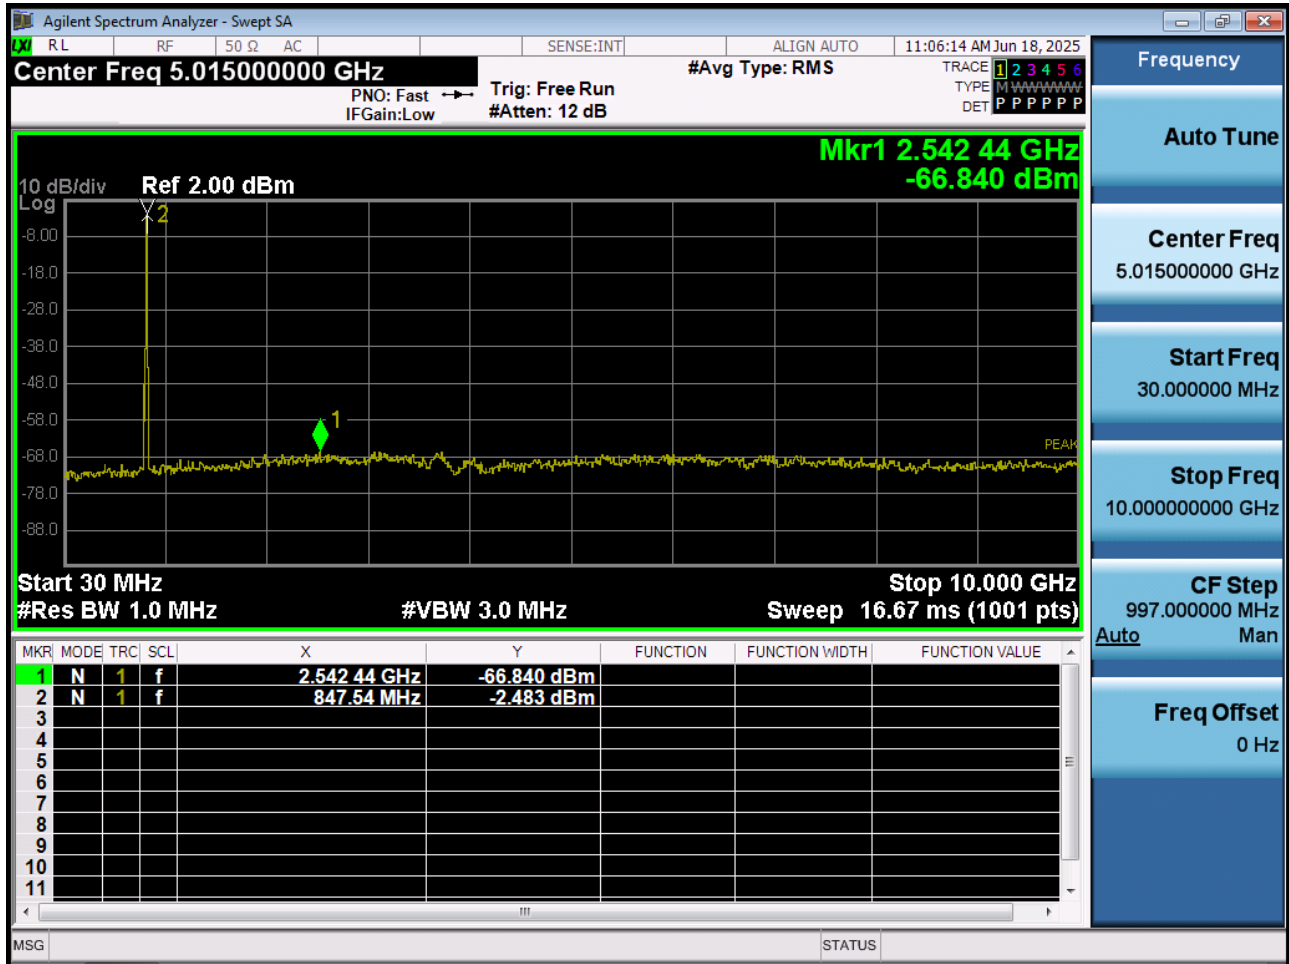

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

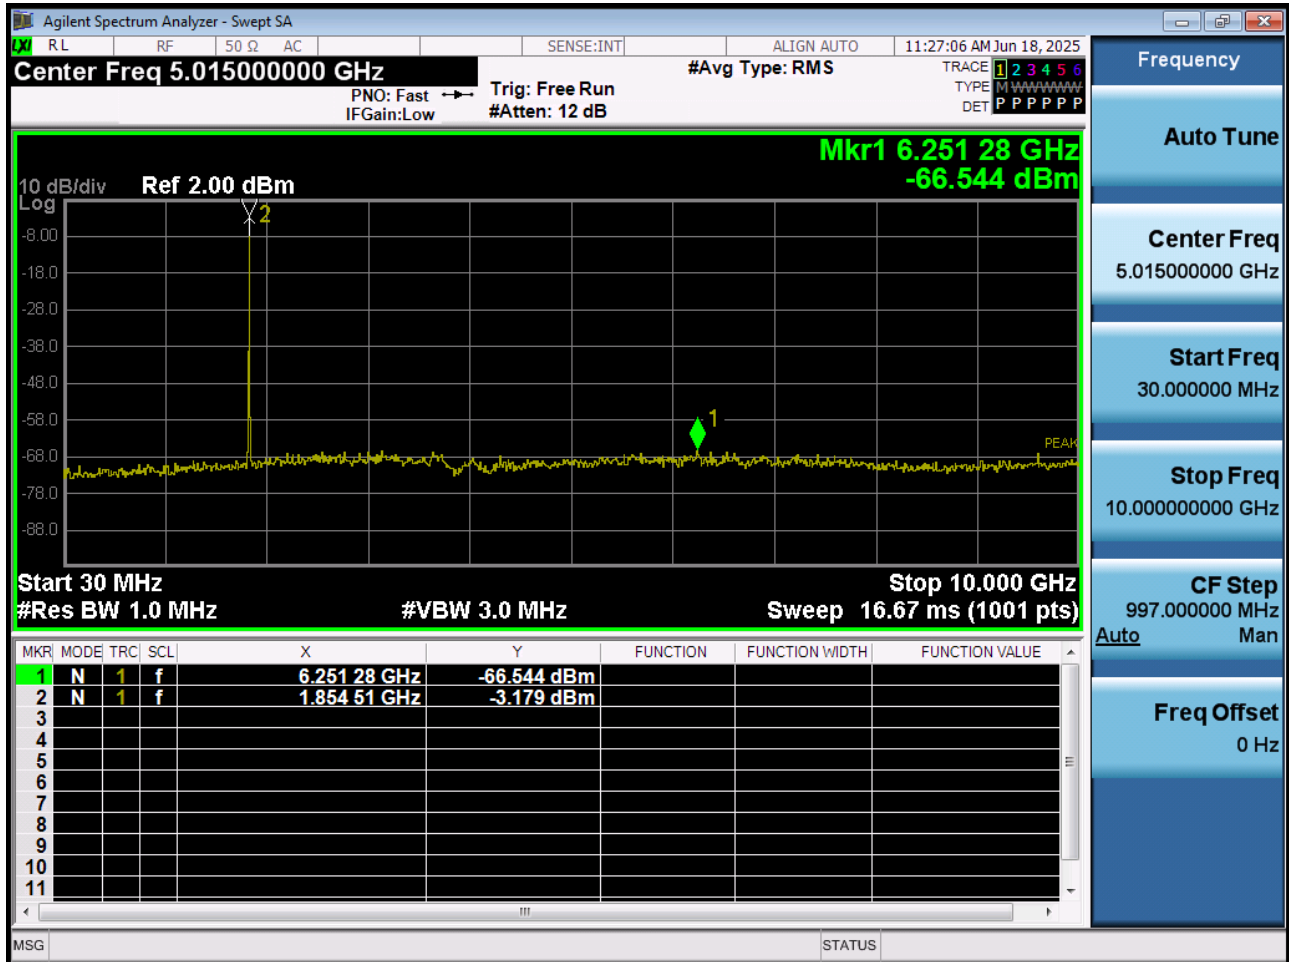

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

10 dB/div Ref 2.00 dBm

Start 10.000 GHz Stop 20.000 GHz


#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 25.00 ms (1001 pts)

Trig: Free Run #Atten: 12 dB

Mkr1 18.93 GHz -61.909 dBm

MSG STATUS

WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

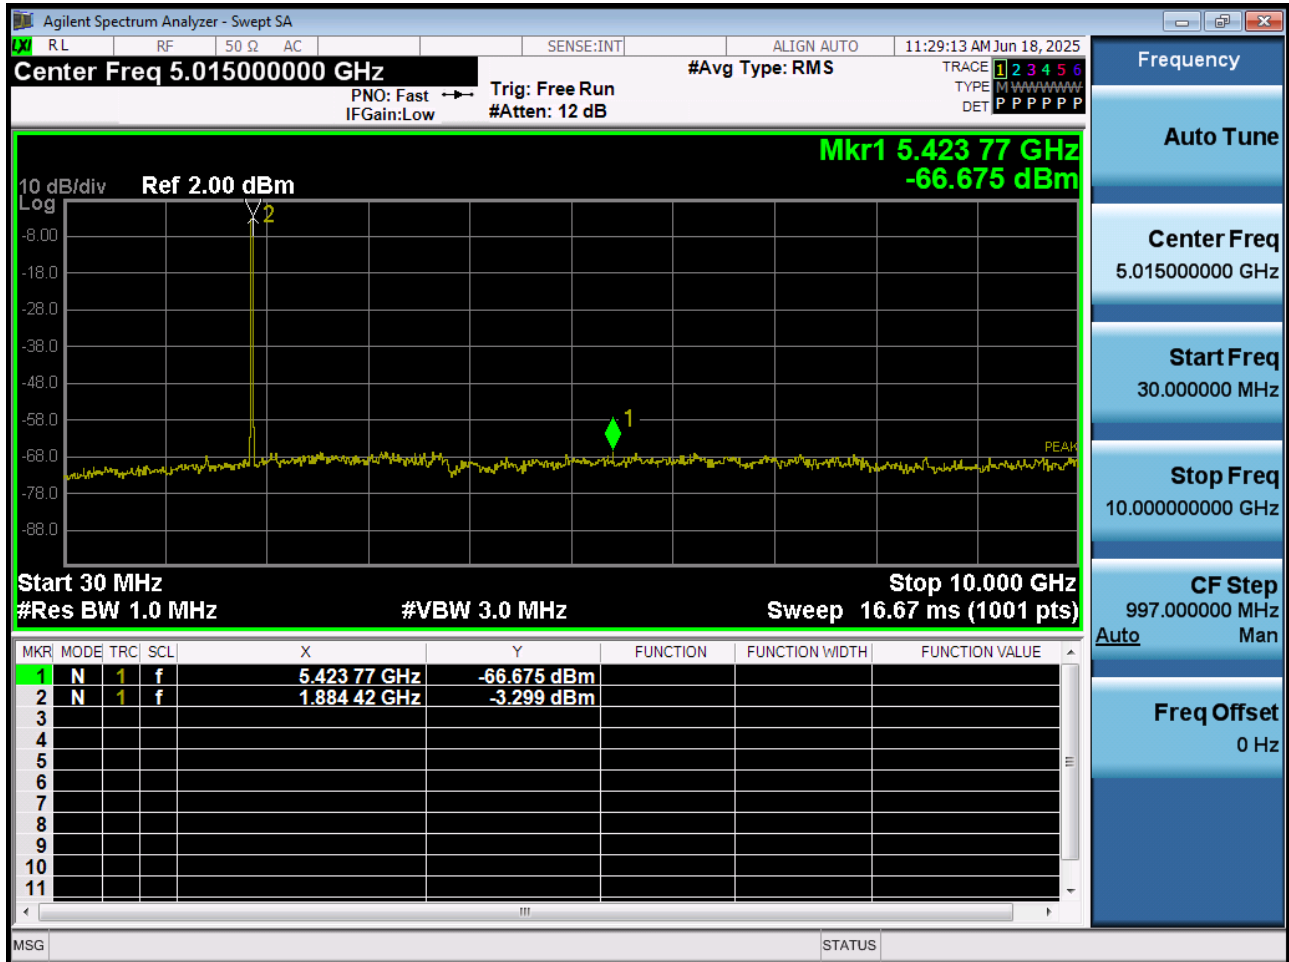

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

Trig: Free Run

#Avg Type: RMS

PNO: Fast

IFGain: Low

#Atten: 12 dB

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P

10 dB/div

Ref 2.00 dBm

Mkr1 18.89 GHz

-61.513 dBm

Start 10.000 GHz


#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 20.000 GHz

Sweep 25.00 ms (1001 pts)

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

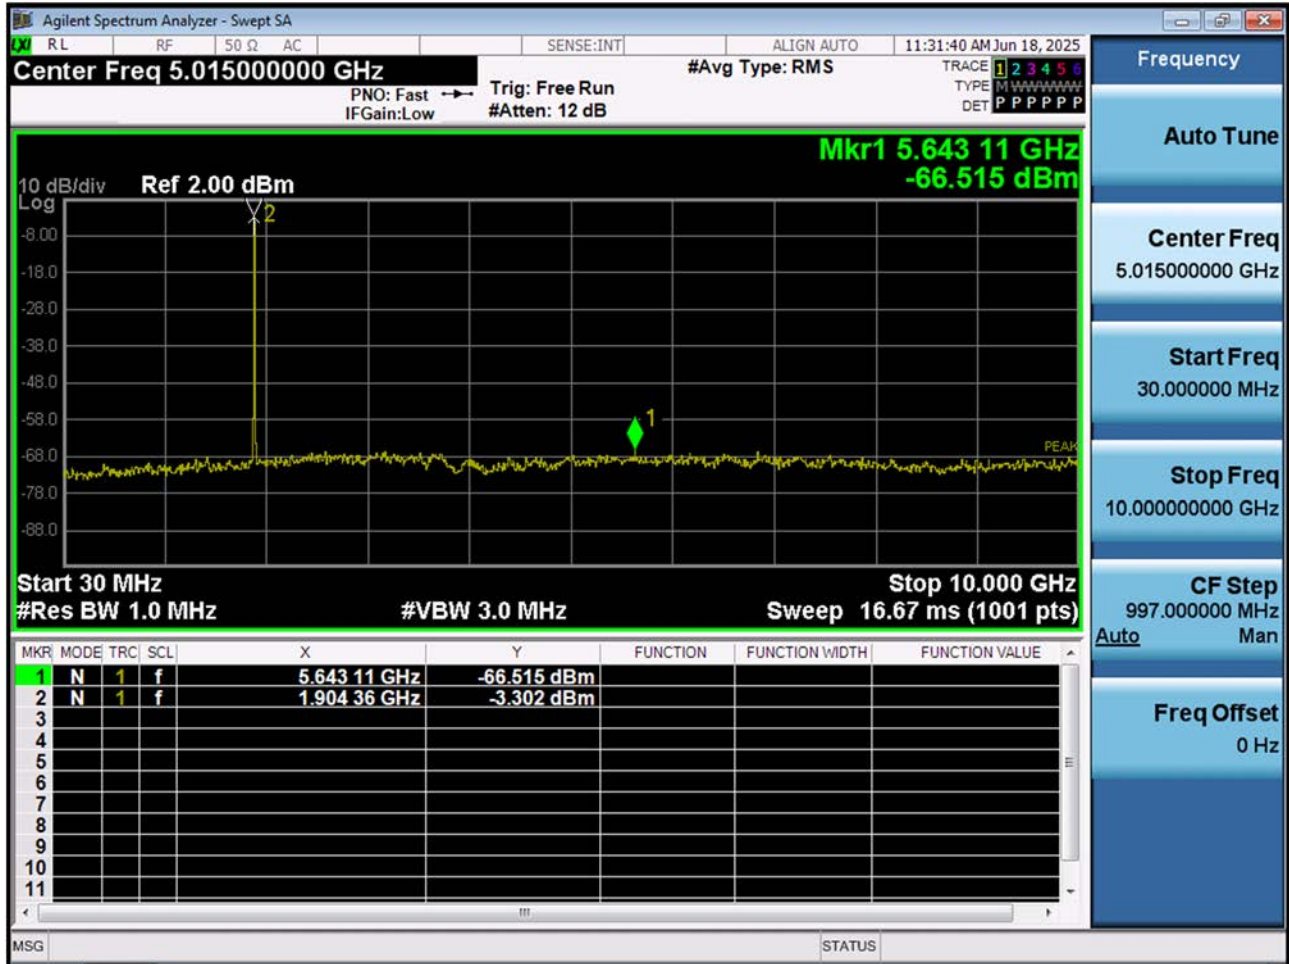

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

Start 10.000 GHz

Stop 20.000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 25.00 ms (1001 pts)

10 dB/div

Ref 2.00 dBm

Mkr1 18.93 GHz

-61.223 dBm

Trig: Free Run

#Atten: 12 dB

#Avg Type: RMS

Frequency

Auto Tune

Center Freq

15.00000000 GHz

Start Freq

10.00000000 GHz

Stop Freq

20.00000000 GHz

CF Step

1.00000000 GHz


Auto

Man


Freq Offset

0 Hz


WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

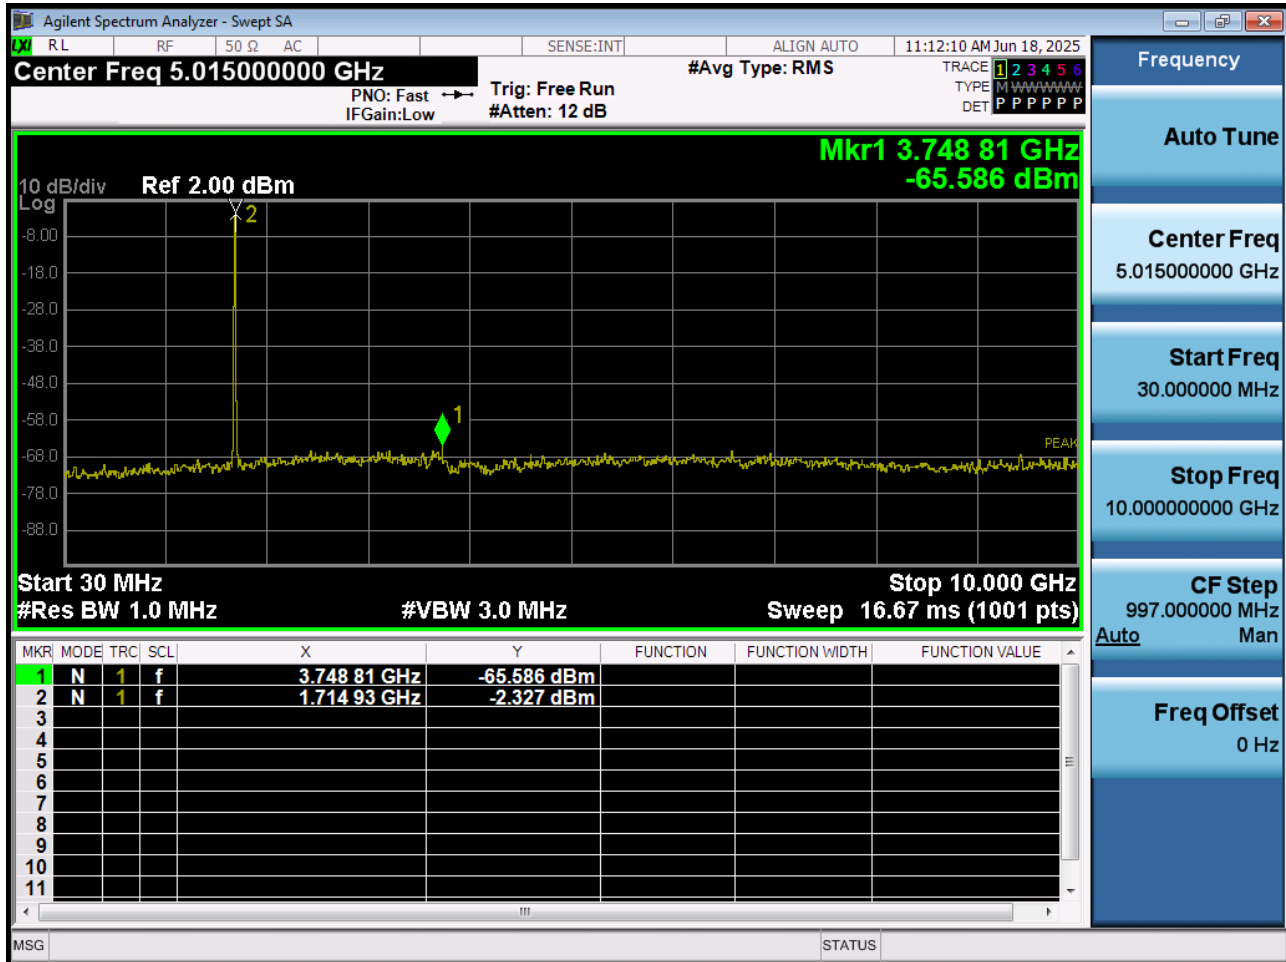

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2

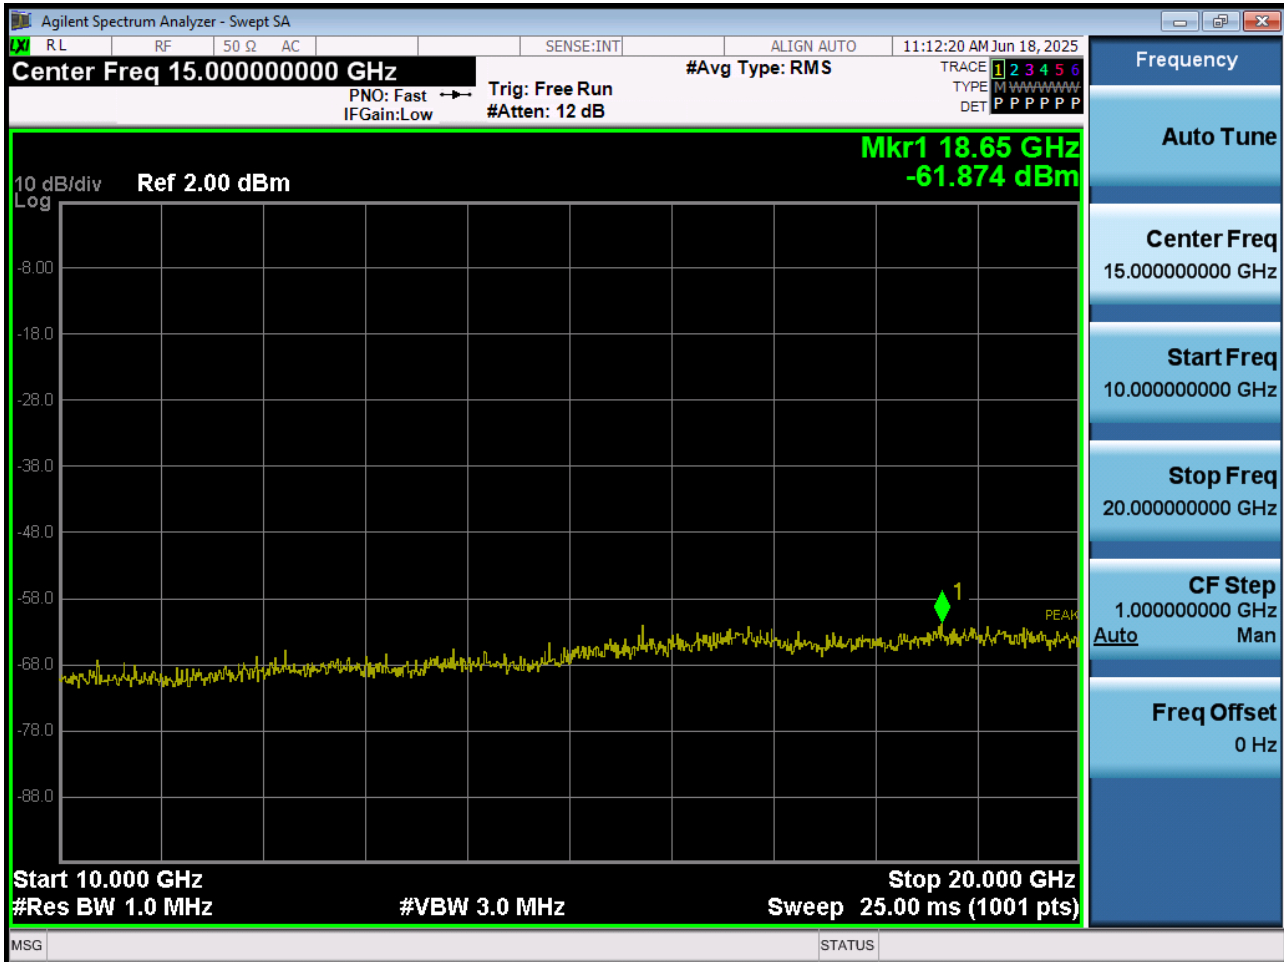

WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

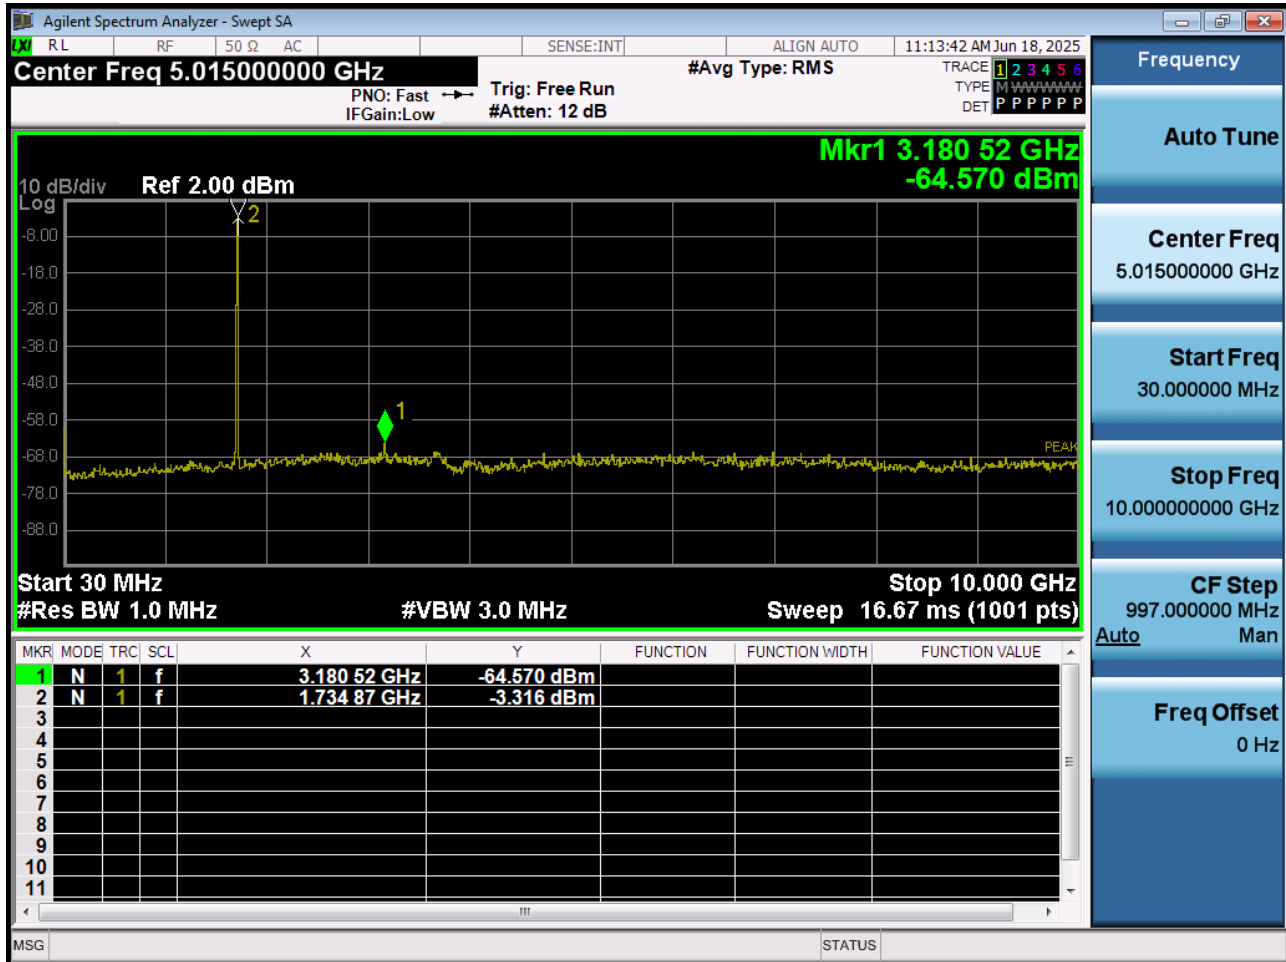

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

10 dB/div Ref 2.00 dBm

Start 10.000 GHz #Res BW 1.0 MHz

Stop 20.000 GHz Sweep 25.00 ms (1001 pts)

Mkr1 19.18 GHz -61.139 dBm

Trig: Free Run #Atten: 12 dB

#Avg Type: RMS

Frequency

Auto Tune

Center Freq 15.00000000 GHz


Start Freq 10.00000000 GHz

Stop Freq 20.00000000 GHz

CF Step 1.00000000 GHz

Freq Offset 0 Hz

WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

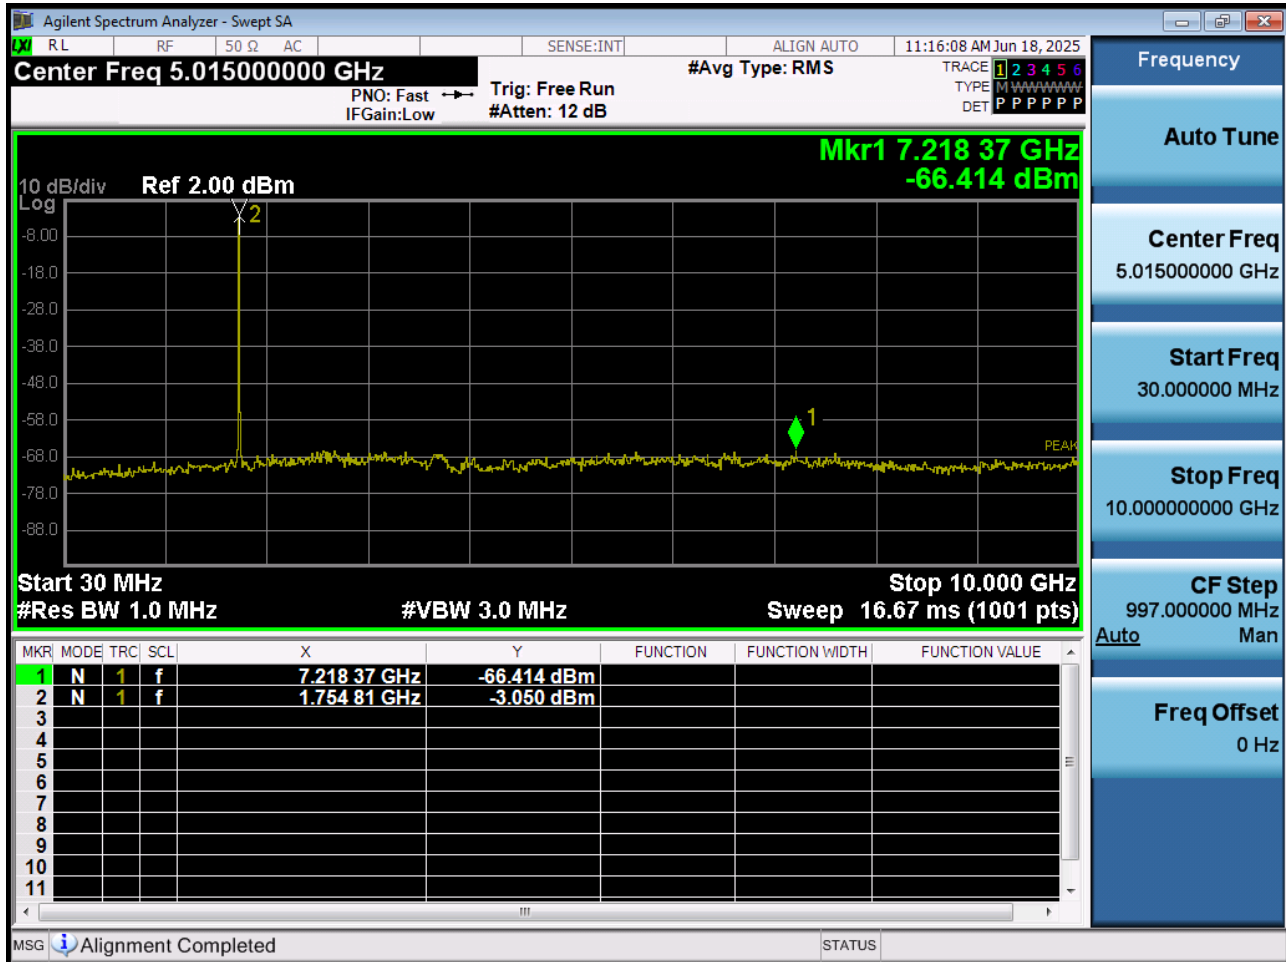

Agilent Spectrum Analyzer - Swept SA

Center Freq 15.00000000 GHz

10 dB/div Ref 2.00 dBm

Start 10.000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 25.00 ms (1001 pts)

Mkr1 18.56 GHz
-61.472 dBm

Trig: Free Run

#Atten: 12 dB

#Avg Type: RMS

Align AUTO

11:16:19 AM Jun 18, 2025

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W W W

DET P P P P P P P

Frequency

Auto Tune

Center Freq
15.000000000 GHz

Start Freq
10.000000000 GHz

Stop Freq
20.000000000 GHz


CF Step
1.000000000 GHz

Auto Man


Freq Offset
0 Hz

11. TEST PLOTS(Sub 1 ANT)


■ GSM850 MODE (128 CH.) Occupied Bandwidth

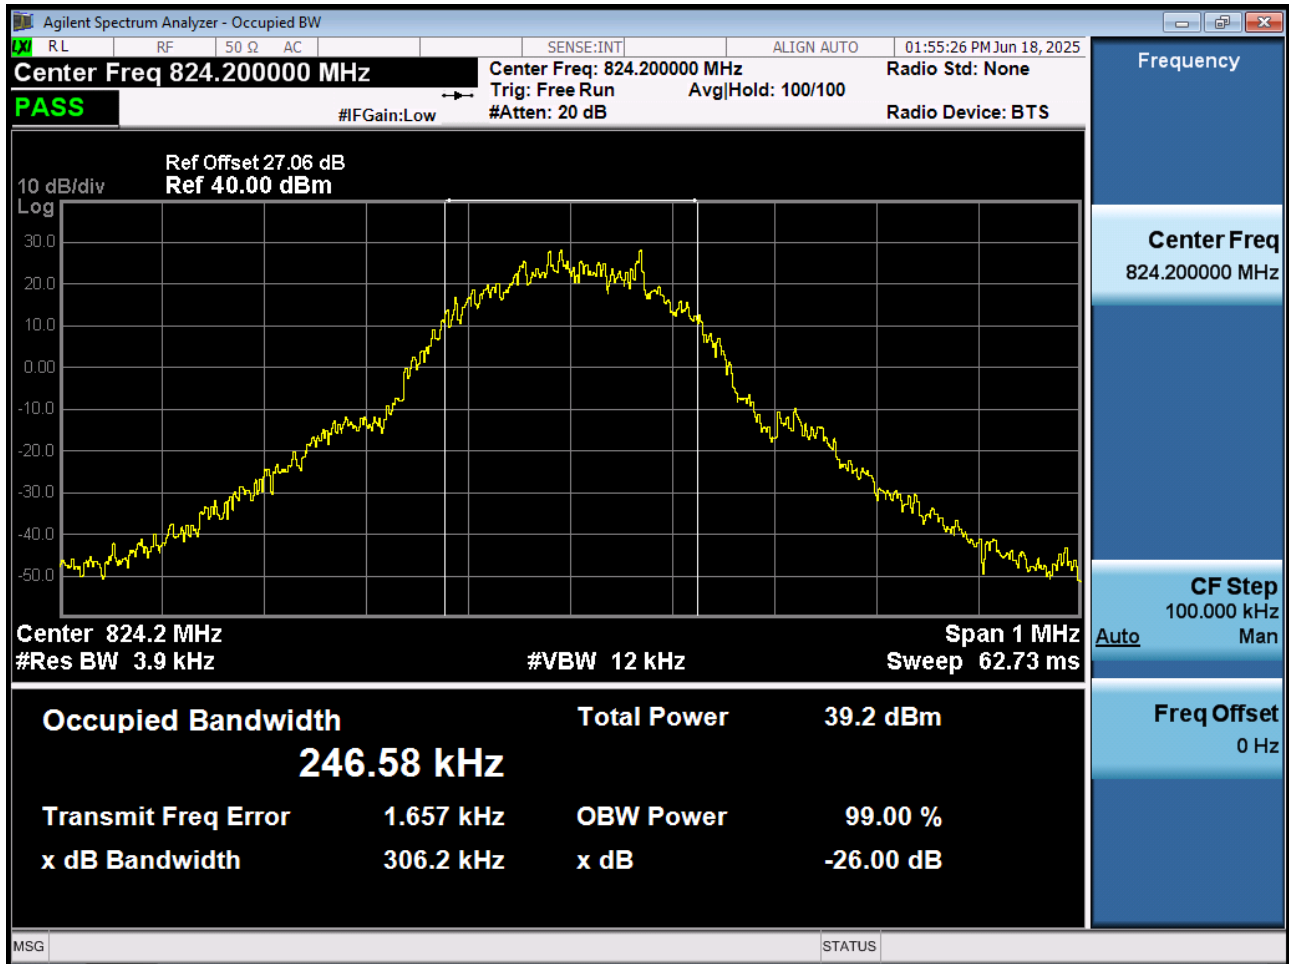


■ GSM850 MODE (190 CH.) Occupied Bandwidth

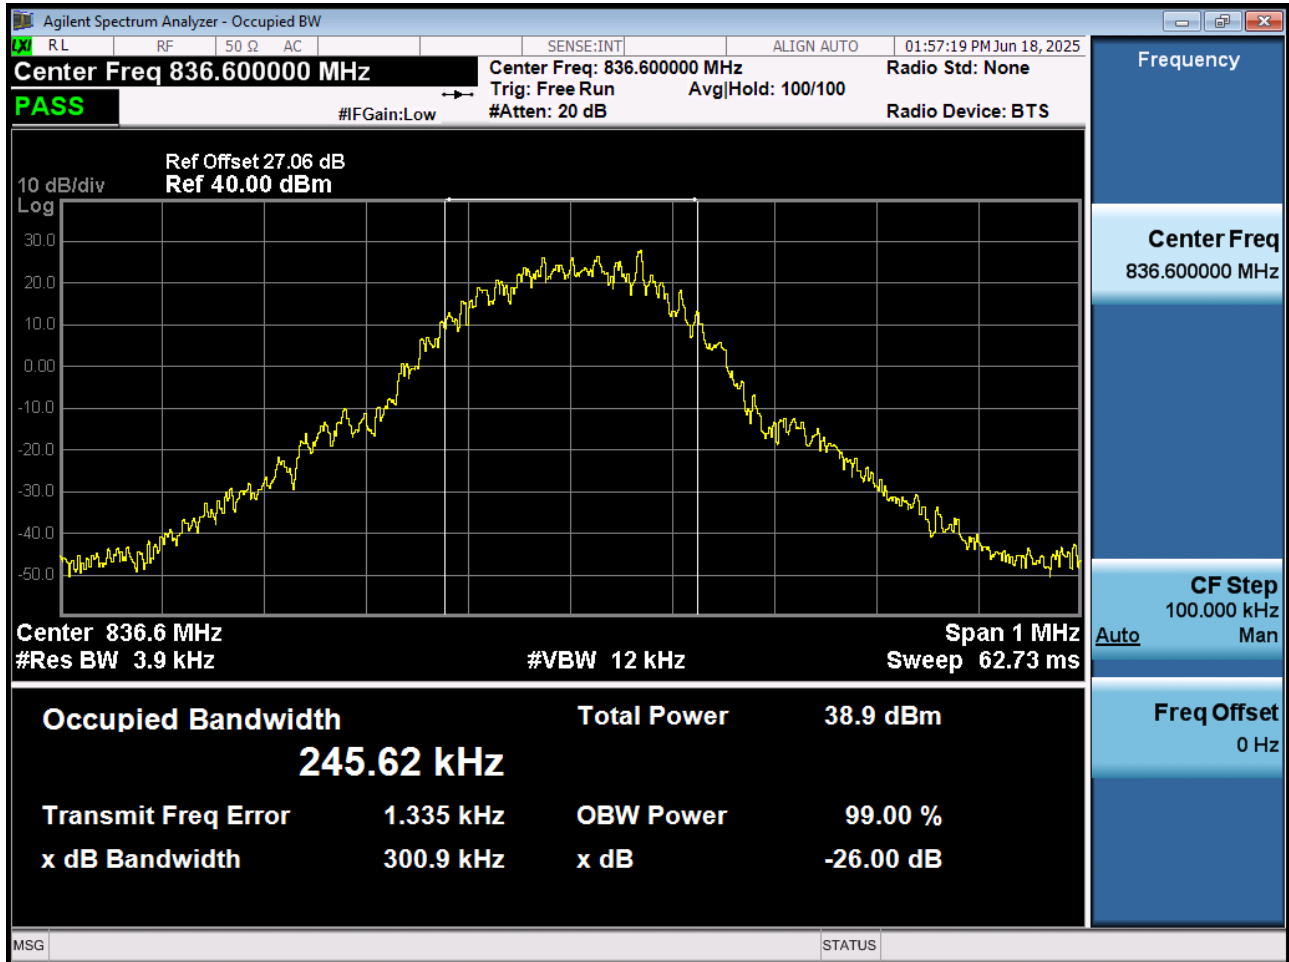


■ GSM850 MODE (251 CH.) Occupied Bandwidth

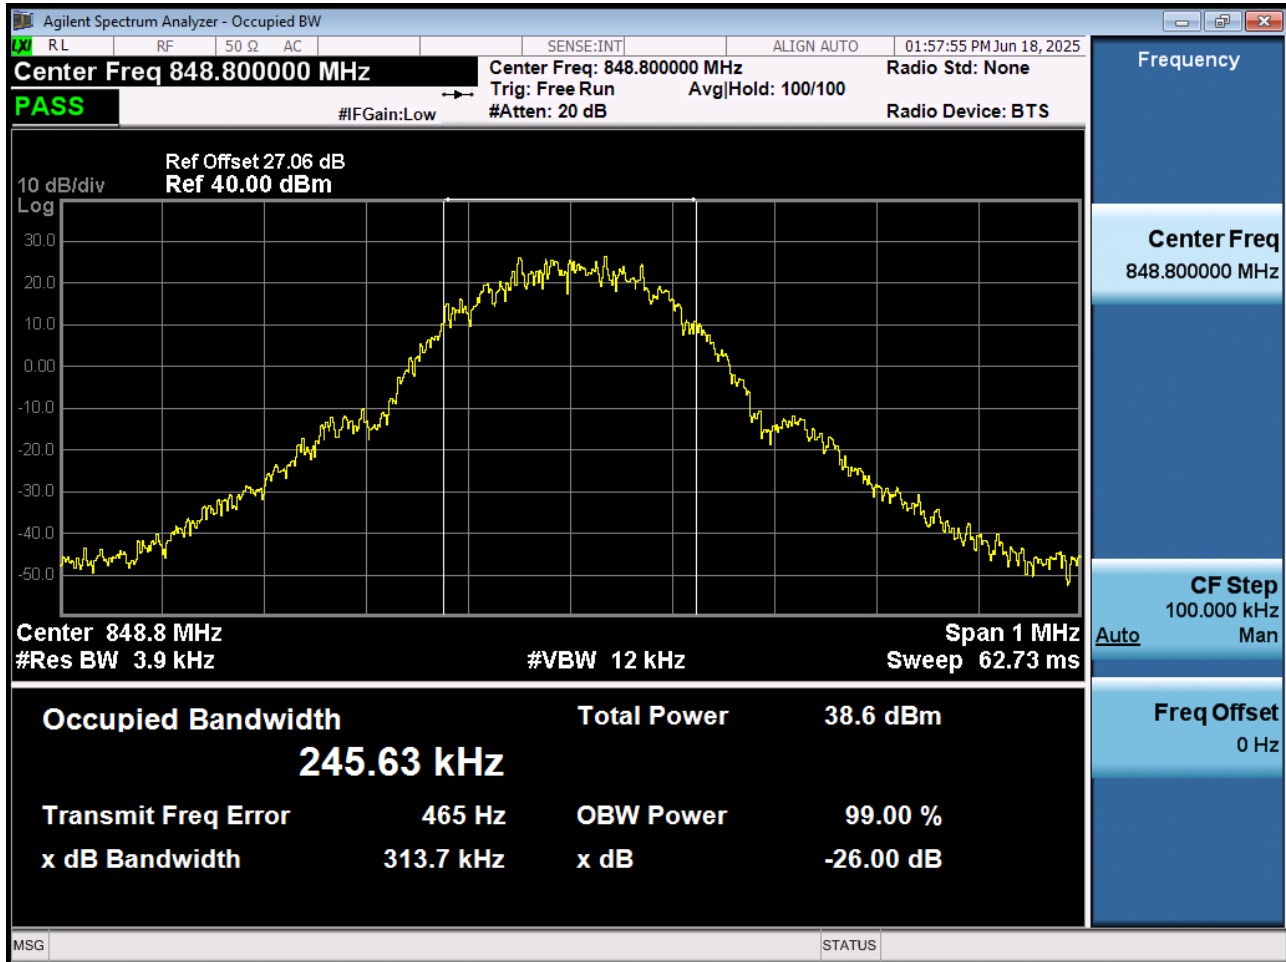


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

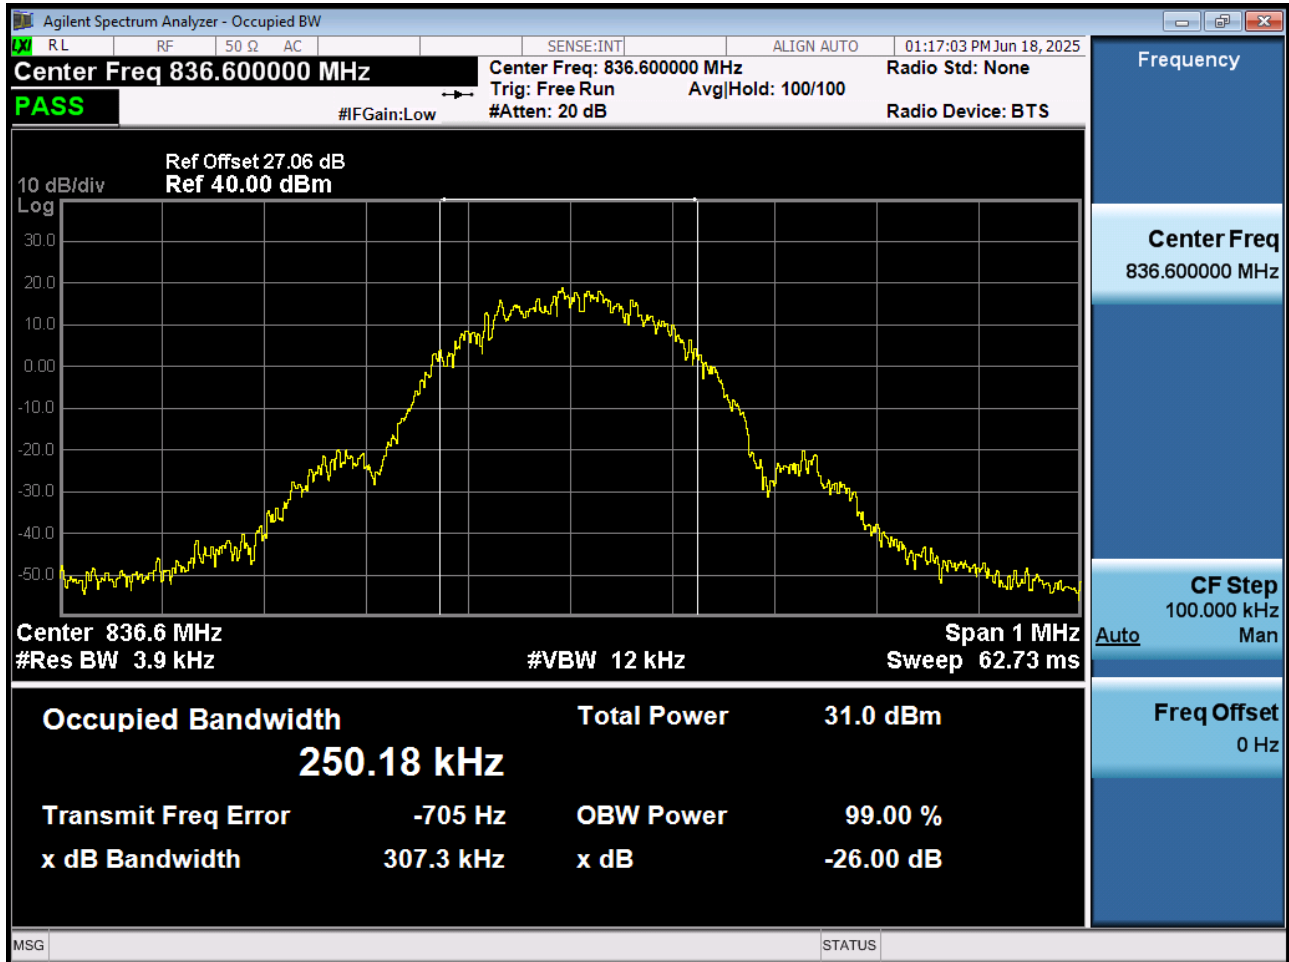


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

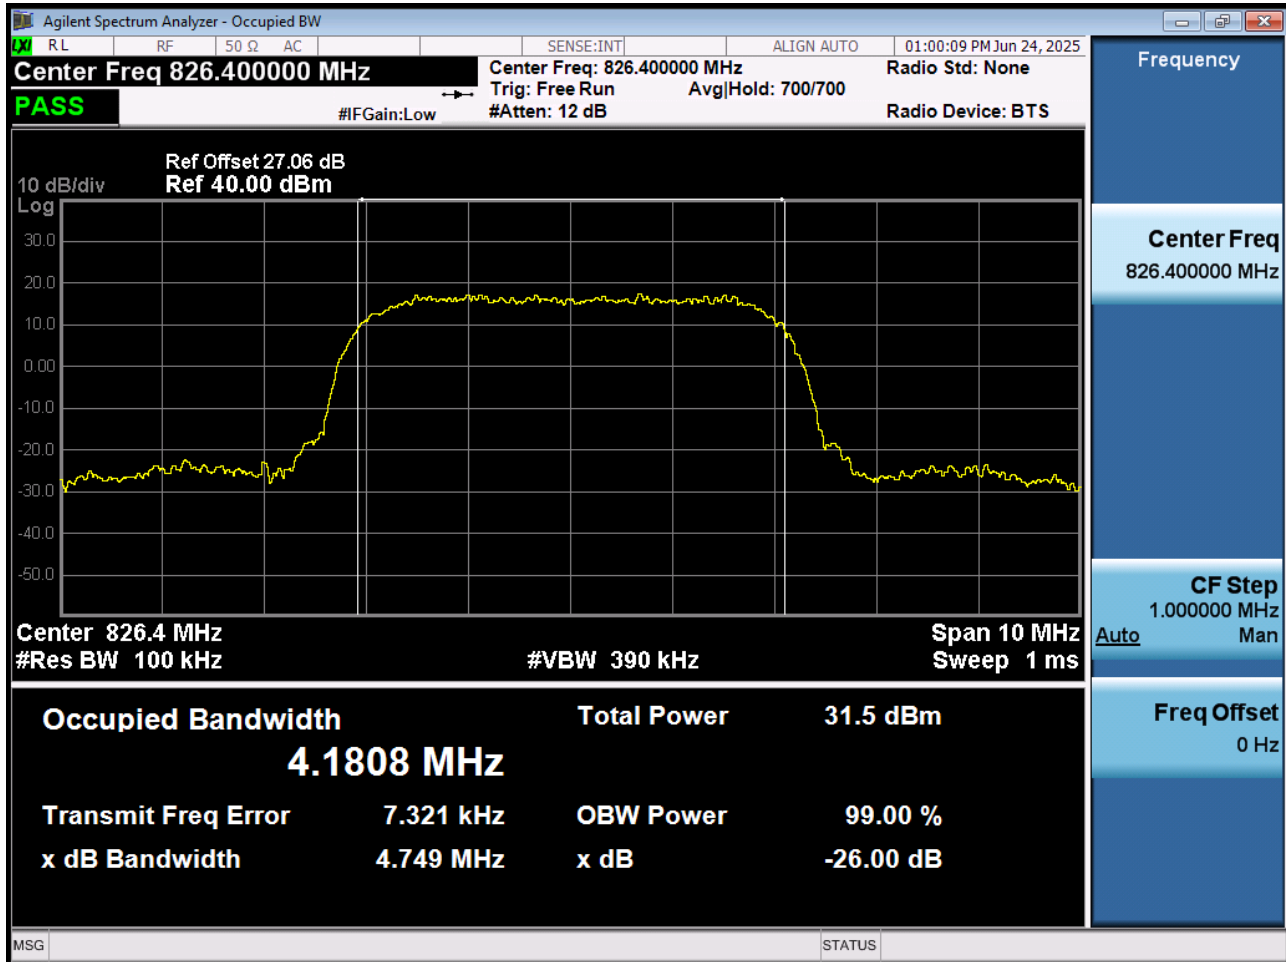


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

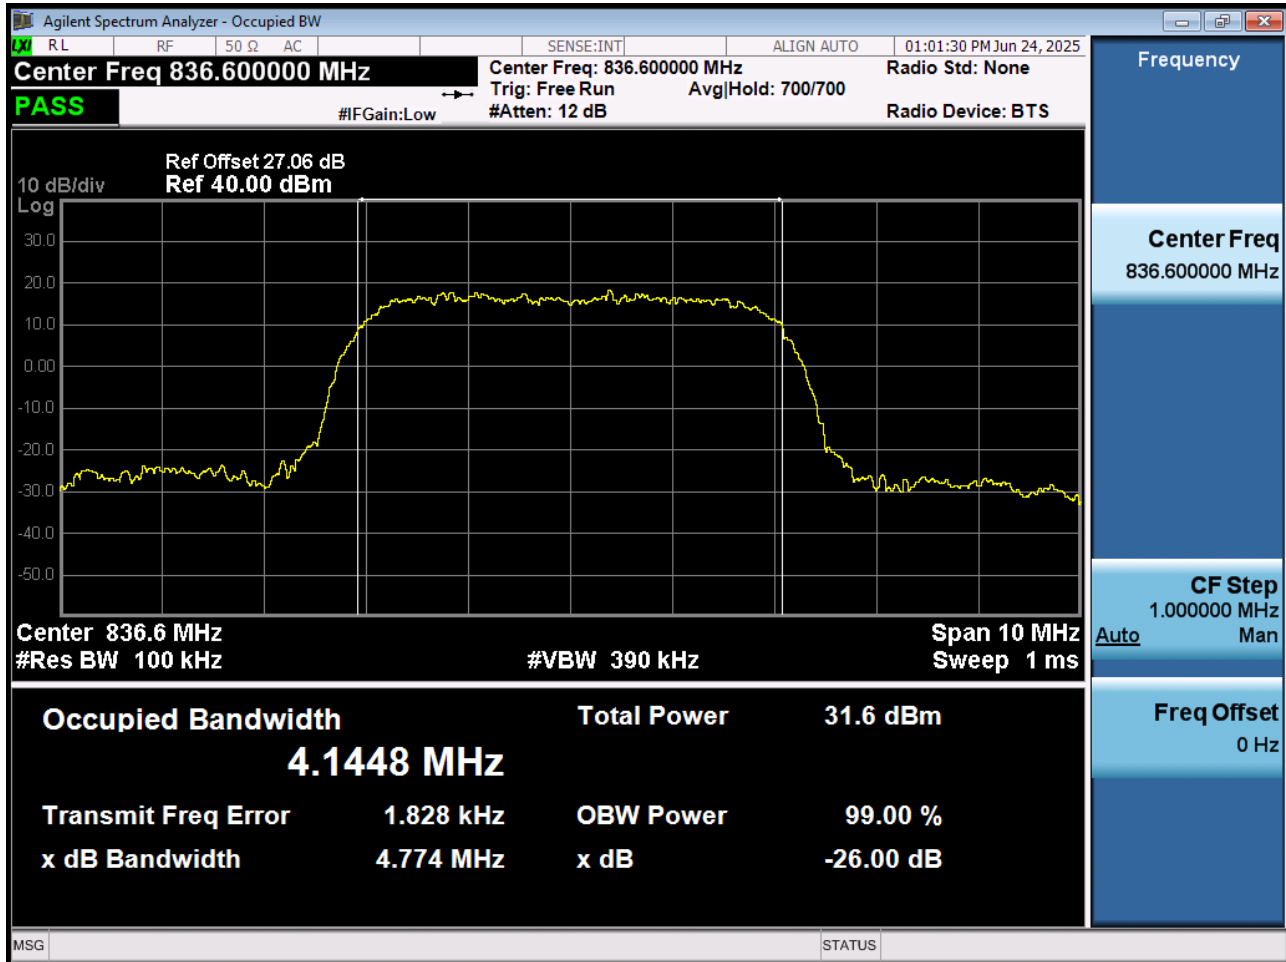


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

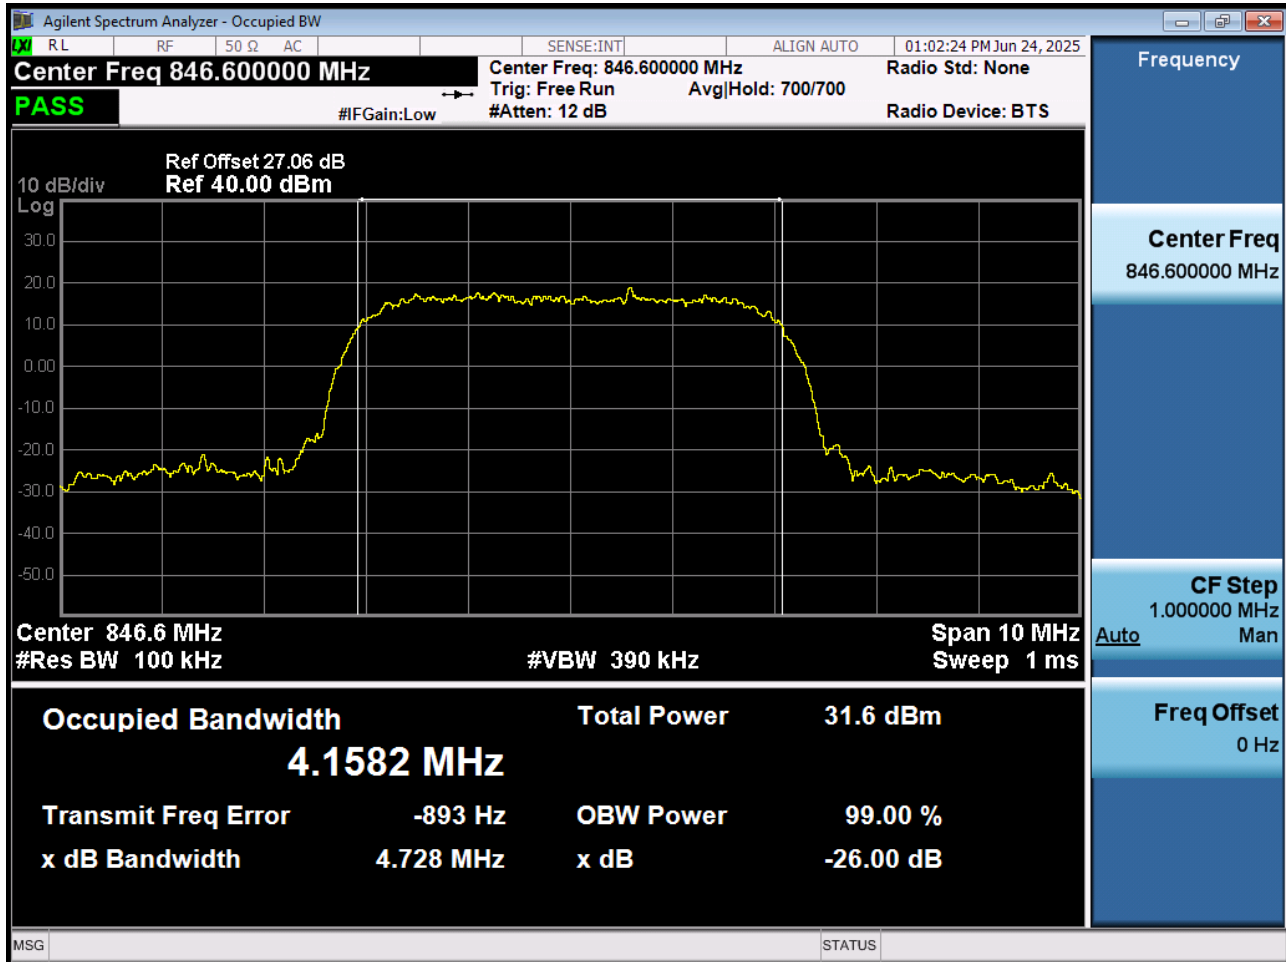


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

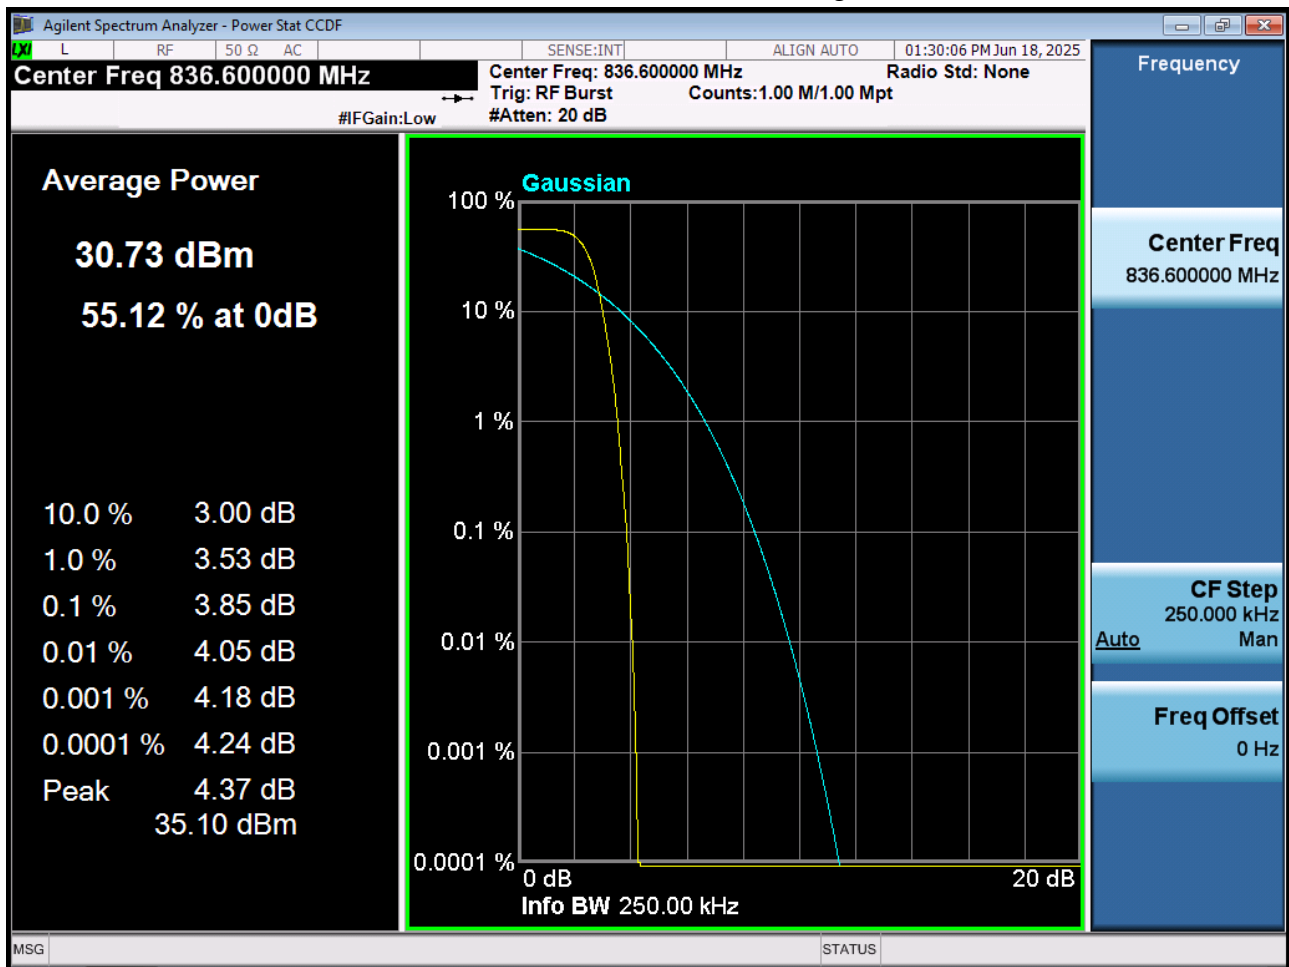

■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

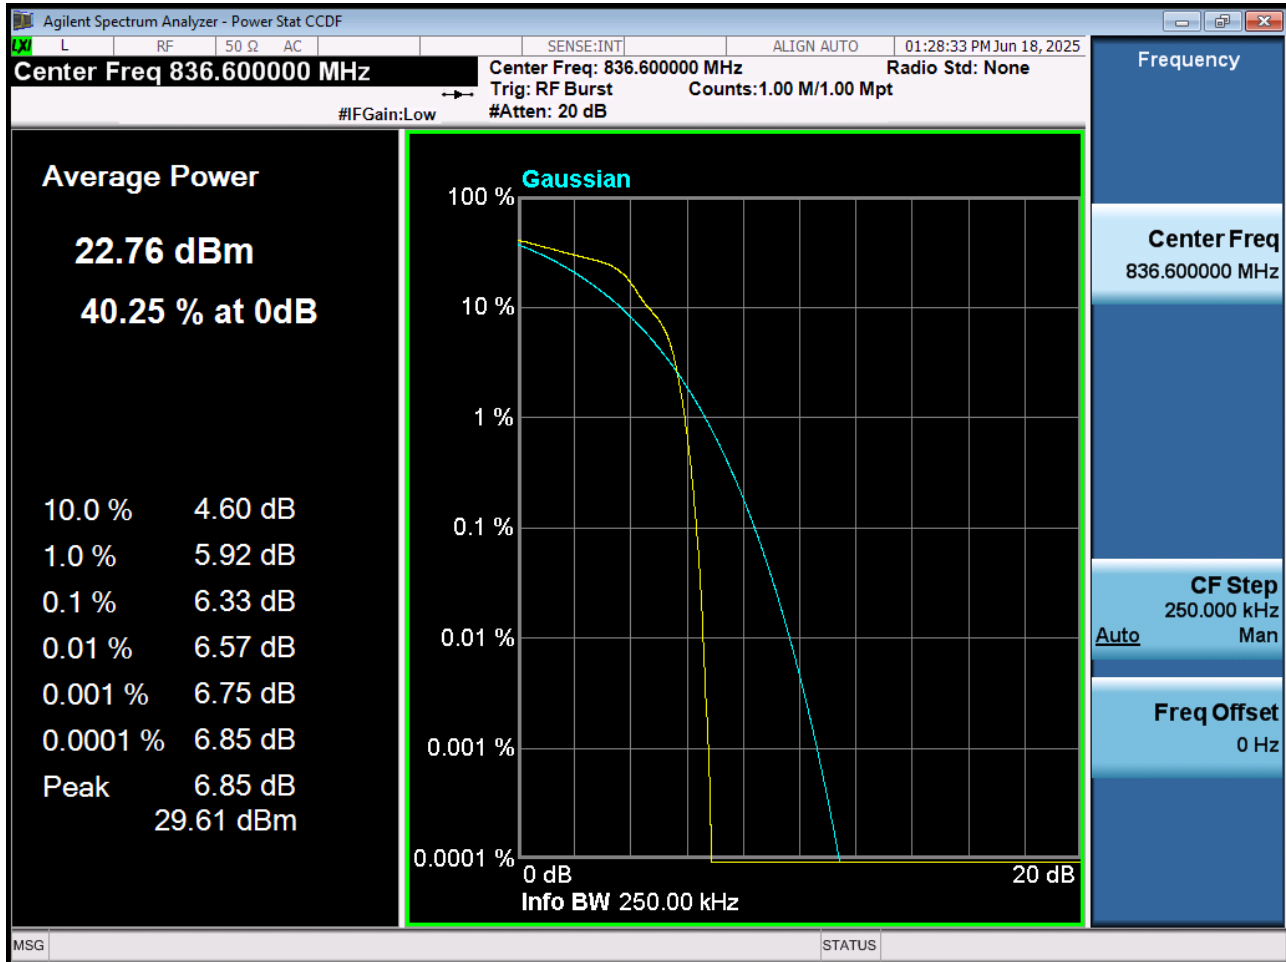

■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

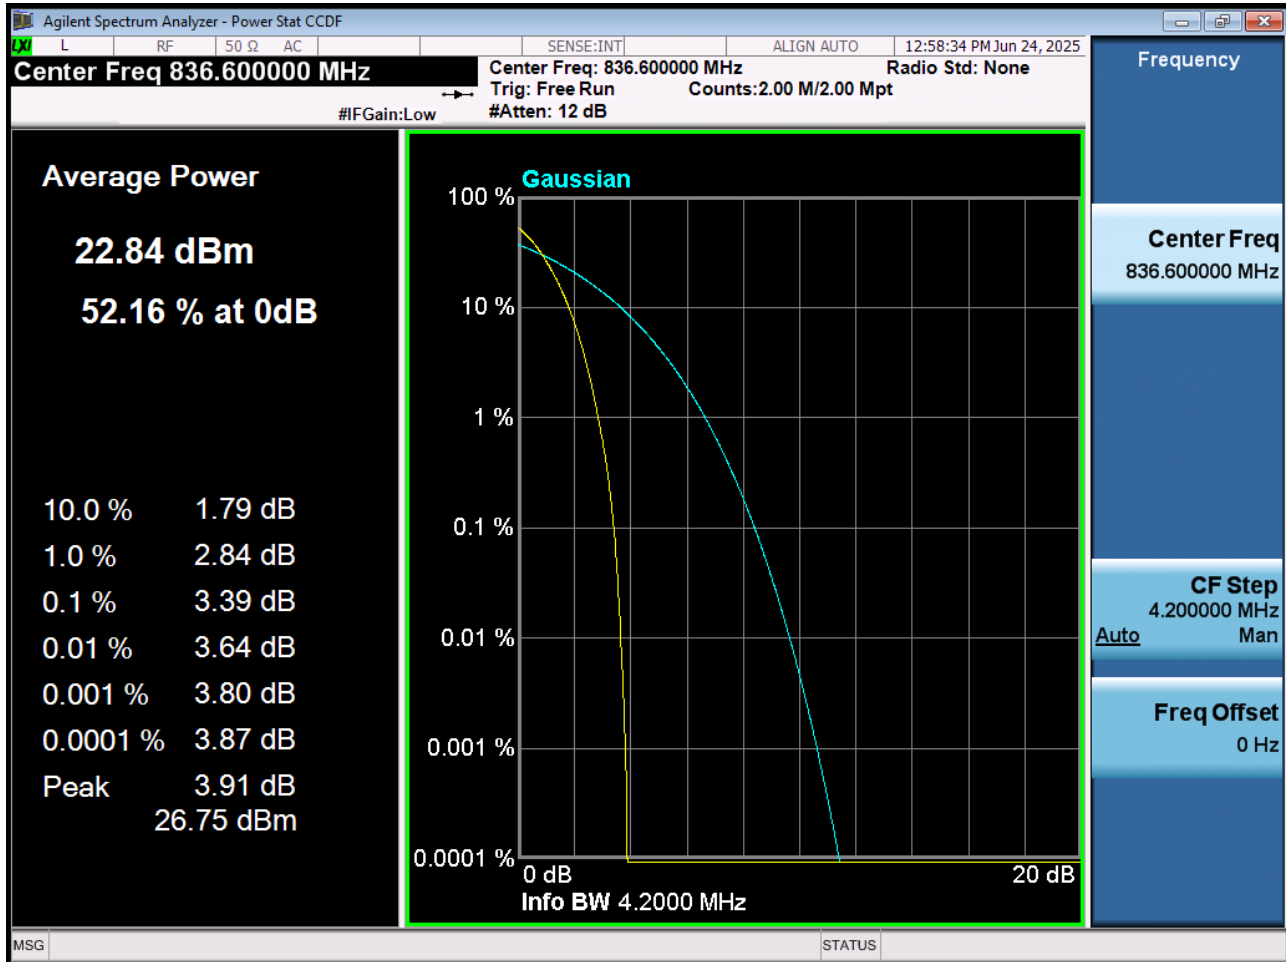

■ GSM850 MODE (128 CH.) Block Edge 1

