

TEST REPORT

FCC UNII 6G Test for SC-51F
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2412-FC021-R1

DATE OF ISSUE
December 24, 2024

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC021-R1

DATE OF ISSUE

December 24, 2024

Additional Model

SCG31

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SC-51F

FCC ID

A3LSMS931JPN

Date of Test

August 26, 2024 ~ October 30, 2024

Modulation type

OFDM/OFDMA

FCC Classification

15E 6 GHz Low Power Dual Client
15E 6 GHz Very Low Power Device

Test Standard Used

FCC Rule Part(s): Part 15.407

Test Results

PASS

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 03, 2024	Initial Release
1	December 24, 2024	Page 12, Added KDB 484596 D001 Page 46, Added the Summary of Data Referencing.

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

Data referencing : UNII 6G Report (FCC ID: A3LSMS931U)

CONTENTS

1. GENERAL INFORMATION	6
EUT DESCRIPTION	6
ANTENNA CONFIGURATIONS	7
2. MAXIMUM OUTPUT POWER	10
3. TEST METHODOLOGY	12
EUT CONFIGURATION	12
EUT EXERCISE	12
GENERAL TEST PROCEDURES	12
DESCRIPTION OF TEST MODES	13
4. INSTRUMENT CALIBRATION	13
5. FACILITIES AND ACCREDITATIONS	13
5.1 FACILITIES	13
5.2 EQUIPMENT	13
6. ANTENNA REQUIREMENTS	14
7. MEASUREMENT UNCERTAINTY	14
8. DESCRIPTION OF TESTS	15
9. SUMMARY OF TEST RESULTS & DATA REFERENCING	44
10. TEST RESULT	47
10.1 DUTY CYCLE	47
10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH	56
10.2.1 26 dB BANDWIDTH(Indoor client)	56
10.2.1.1 Ant1	56
10.2.1.2 Ant2	73
10.2.2 26 dB BANDWIDTH(Standard client)	89
10.2.2.1 Ant1	89
10.2.2.2 Ant2	101
10.2.3 26 dB BANDWIDTH(Very Low Power Device)	112
10.2.3.1 Ant1	112
10.2.3.2 Ant2	124
10.3 OUTPUT POWER MEASUREMENT	142
10.3.1 E.I.R.P Output Power(Indoor client)	142
10.3.1.1 MIMO_CDD(Ant1+Ant2)	143
10.3.2 E.I.R.P Output Power(Standard client)	167
10.3.2.1 MIMO_CDD(Ant1+Ant2)	168
10.3.3 E.I.R.P Output Power(Very Low Power Device)	182
10.3.3.1 MIMO_CDD(Ant1+Ant2)	183
10.4 POWER SPECTRAL DENSITY	197
10.4.1 Indoor client	197
10.4.1.1 MIMO_CDD(Ant1+Ant2)	198

10.4.2 Standard client	222
10.4.2.1 MIMO_CDD(Ant1+Ant2)	223
10.4.3 Very Low Power Device	236
10.4.3.1 MIMO_CDD(Ant1+Ant2)	237
10.5 In-Band Emission	268
10.6 Contention Based Protocol	353
10.7 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	369
10.8 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	373
10.9 Transmit Power Control, Very Low Power Devices	377
10.10 FREQUENCY STABILITY.	379
10.10.1 160 MHz BW	379
10.11 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz)	395
10.12 RADIATED SPURIOUS EMISSIONS (Above 1 GHz)	396
10.12.1 Standard Client	396
10.12.2 Indoor Client	423
10.13 RADIATED RESTRICTED BAND EDGE	430
10.13.1 Standard Client	430
10.13.2 Indoor Client	441
10.14 POWERLINE CONDUCTED EMISSIONS	456
11. LIST OF TEST EQUIPMENT	457
12. ANNEX A_ TEST SETUP PHOTO	459

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SC-51F	
Additional Model	SCG31	
EUT Type	Mobile Phone	
Power Supply	DC 3.88 V	
Modulation Type	OFDM/OFDMA	
Frequency Range (MHz)	Indoor Client	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-6	20 MHz BW : 6435 - 6515 40 MHz BW : 6445 - 6525 80 MHz BW : 6465 - 6545 160 MHz BW : 6505 320 MHz BW : 6425 - 6585
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
	U-NII-8	20 MHz BW : 6875 - 7115 40 MHz BW : 6885 - 7085 80 MHz BW : 6865 - 7025 160 MHz BW : 6825 - 6985 320 MHz BW : 6745 - 6905
	Standard Client, Very Low Power Device	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
Straddle channel	Supported	
Channel Puncturing	Supported (This device only punctures to optimize network performance and never to avoid licensed incumbents)	
Antenna Specification	Type: Metal	
Serial number	Conducted : R3CX80BGA1K Radiated : R3CX80BGCTR Conducted(CBP, Dual Client, Proper Power Adjustment test, TPC) : 873b3bd4bf3a7ece	

ANTENNA CONFIGURATIONS

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	O	O	O	X
802.11ax (HE20/40/80/160)	O	O	O	O
802.11be (EHT20/40/80/160/320)	O	O	O	O
802.11be (EHT20/40/80/160/320)_MRU	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6 GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO	-	-	on	on	-	-	on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO	-	-	-	-	on	on	on	on	-
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on	-	-	-	-	Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on	-	-	on	on	-	-	-
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	-	on	on	on	-	-	on	-	Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO	-	on	-	-	on	on	on	-	-

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Band	Ant Gain (dBi)		N _{ANT} / N _{ss}	Directional Gain (dBi)	
	ANT1	ANT2		CDD	SDM
UNII 5	-3.76	-4.02	2 / 2	-0.88	-3.76
UNII 6	-5.82	-5.08		-2.43	-5.08
UNII 7	-5.82	-5.08		-2.43	-5.08
UNII 8	-5.63	-5.26		-2.43	-5.26

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left(\left(10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT} / N_{SS}),$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a Maximum Conducted Output Power and EIRP Power as follows:

[Indoor Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	8.65	0.007	8.37	0.007	11.52	0.014	10.64	0.012
	EHT40	11.32	0.014	11.20	0.013	14.27	0.027	13.39	0.022
	EHT80	14.56	0.029	14.23	0.026	17.41	0.055	16.53	0.045
	EHT160	16.54	0.045	16.35	0.043	19.46	0.088	18.58	0.072
	EHT320	16.87	0.049	16.34	0.043	19.62	0.092	18.74	0.075
	802.11a	8.58	0.007	8.40	0.007	11.50	0.014	10.62	0.012
UNII6	EHT20	8.78	0.008	9.83	0.010	12.35	0.017	9.92	0.010
	EHT40	11.85	0.015	12.57	0.018	15.23	0.033	12.80	0.019
	EHT80	14.69	0.029	15.39	0.035	18.07	0.064	15.64	0.037
	EHT160	15.50	0.035	16.32	0.043	18.94	0.078	16.51	0.045
	EHT320	16.28	0.042	16.85	0.048	19.59	0.091	17.16	0.052
	802.11a	8.46	0.007	9.41	0.009	11.97	0.016	9.54	0.009
UNII7	EHT20	9.80	0.010	9.79	0.010	12.81	0.019	10.38	0.011
	EHT40	12.69	0.019	12.10	0.016	15.42	0.035	12.99	0.020
	EHT80	15.31	0.034	14.91	0.031	18.13	0.065	15.70	0.037
	EHT160	16.09	0.041	15.70	0.037	18.91	0.078	16.48	0.044
	802.11a	9.43	0.009	9.37	0.009	12.41	0.017	9.98	0.010
UNII8	EHT20	9.90	0.010	9.40	0.009	12.67	0.018	10.24	0.011
	EHT40	12.76	0.019	12.26	0.017	15.53	0.036	13.10	0.020
	EHT80	15.51	0.036	15.10	0.032	18.32	0.068	15.89	0.039
	EHT160	16.41	0.044	15.94	0.039	19.19	0.083	16.76	0.047
	EHT320	16.51	0.045	16.20	0.042	19.37	0.086	16.94	0.049
	802.11a	9.88	0.010	9.37	0.009	12.64	0.018	10.21	0.011

[Standard Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	15.87	0.039	16.76	0.047	19.35	0.086	18.47	0.070
	EHT40	16.54	0.045	16.41	0.044	19.49	0.089	18.61	0.073
	EHT80	16.62	0.046	16.42	0.044	19.53	0.090	18.65	0.073
	EHT160	16.60	0.046	16.43	0.044	19.53	0.090	18.65	0.073
	EHT320	16.87	0.049	16.34	0.043	19.62	0.092	18.74	0.075
	802.11a	15.44	0.035	16.35	0.043	18.93	0.078	18.05	0.064
UNII7	EHT20	16.48	0.044	16.25	0.042	19.37	0.087	16.94	0.049
	EHT40	16.61	0.046	16.08	0.041	19.36	0.086	16.93	0.049
	EHT80	16.43	0.044	16.14	0.041	19.30	0.085	16.87	0.049
	EHT160	16.18	0.041	15.76	0.038	18.98	0.079	16.55	0.045
	802.11a	16.12	0.041	15.82	0.038	18.98	0.079	16.55	0.045

[Very Low Power Device]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	4.82	0.003	4.68	0.003	7.76	0.006	6.88	0.005
	EHT40	7.64	0.006	7.50	0.006	10.58	0.011	9.70	0.009
	EHT80	10.39	0.011	10.02	0.010	13.22	0.021	12.34	0.017
	EHT160	11.72	0.015	11.71	0.015	14.73	0.030	13.85	0.024
	EHT320	11.64	0.015	11.82	0.015	14.74	0.030	13.86	0.024
	802.11a	3.96	0.002	3.76	0.002	6.87	0.005	5.99	0.004
UNII7	EHT20	5.78	0.004	6.39	0.004	9.11	0.008	6.68	0.005
	EHT40	8.64	0.007	8.58	0.007	11.62	0.015	9.19	0.008
	EHT80	11.37	0.014	10.97	0.013	14.19	0.026	11.76	0.015
	EHT160	11.24	0.013	10.59	0.011	13.94	0.025	11.51	0.014
	802.11a	5.89	0.004	5.07	0.003	8.51	0.007	6.08	0.004

3. TEST METHODOLOGY

U-NII 6 GHz devices operating in the 5.925-7.125 GHz band was tested using the following measurement procedure.

- [1] FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03(October 10, 2024)
- [2] KDB 789033 D02 General UNII Test Procedures New Rules v02r01(December 14, 2017)
- [3] ANSI C63.10(2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'
- [4] KDB 484596 D01 Reference Test Data v02r03

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

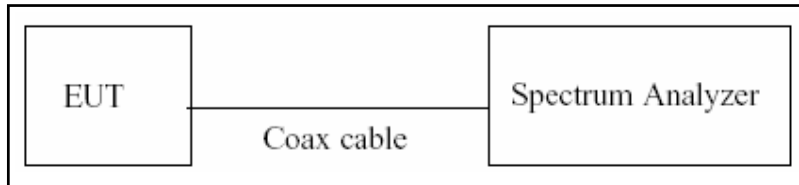

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 26 dB Bandwidth & 99% Occupied Bandwidth

Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

Test Configuration

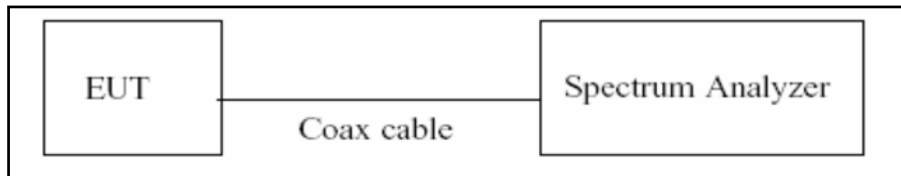

Test Procedure (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (99 % Occupied Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure D in KDB 789033 D02 v02r01.

1. RBW = 1% ~ 5% of the occupied bandwidth
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Use the 99% power bandwidth function of the instrument

Note:

1. We tested X dB & 99% bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. The 26 dB bandwidth is used to determine the in-Band Emission limits.

8.3. Output Power Measurement

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	24 dBm

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

Standard Client Limit

Band	Limit (e.i.r.p)
UNII 5,7	30 dBm

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.


Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,7	14 dBm

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p must not exceed 14 dBm.

Test Configuration

Power Meter

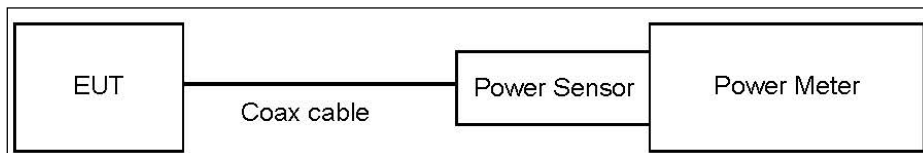

Test Procedure (Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Power Meter offset

Ant.1: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.65 dB)

Ant.2: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.46 dB)

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	11.55	11.36
UNII 6	11.55	11.36
UNII 7	11.55	11.36
UNII 8	11.55	11.36

(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	-1 dBm/MHz

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

Standard Client Limit


Band	Limit (e.i.r.p)
UNII 5,7	17 dBm/MHz

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band

Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,7	-5 dBm/MHz

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p must not exceed 14 dBm, the maximum power spectral density must not exceed -5 Bm e.i.r.p. in any 1-megahertz band

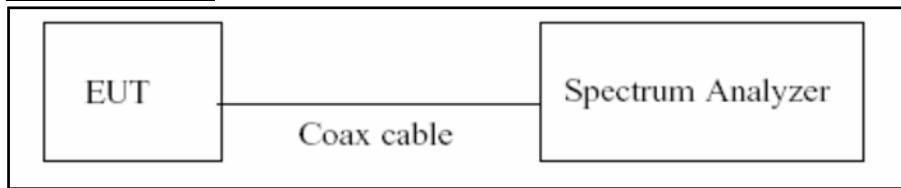Test Configuration**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq$ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

Ant.1: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.65 dB)

Ant.2: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.46 dB)


3. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	11.55	11.36
UNII 6	11.55	11.36
UNII 7	11.55	11.36
UNII 8	11.55	11.36

(Actual value of loss for the attenuator and cable combination)

8.5. In-Band Emission (Emissions Mask)

Test Configuration

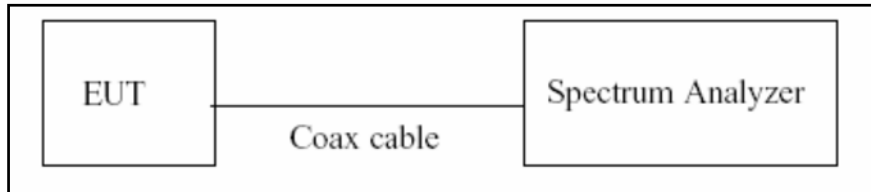


Test Procedure

We tested according to Procedure J in KDB 987594 D02.

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a. Set the span to encompass the entire 26 dB EBW of the signal.
 - b. Set RBW = same RBW used for 26 dB EBW measurement.
 - c. Set $VBW \geq 3 \times RBW$
 - d. Number of points in sweep $\geq [2 \times \text{span} / RBW]$.
 - e. Sweep time = auto.
 - f. Detector = RMS (i.e., power averaging)
 - g. Trace average at least 100 traces in power averaging (rms) mode.
 - h. Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.


6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

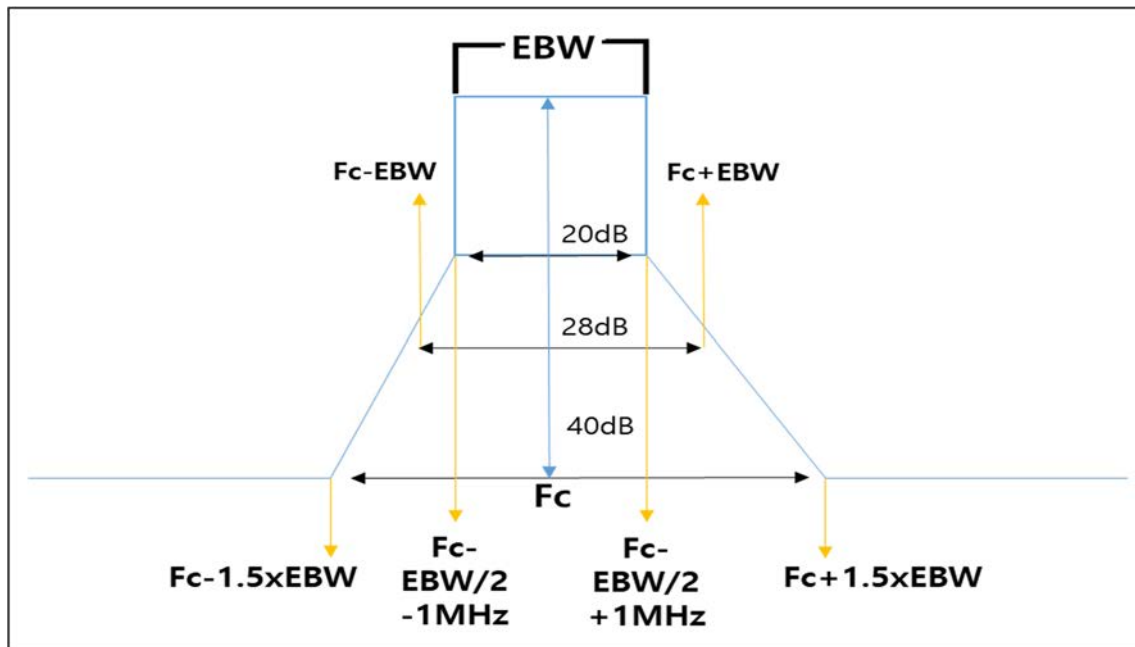

Generic Emission Mask

8.6. Contention Based Protocol

Test Configuration

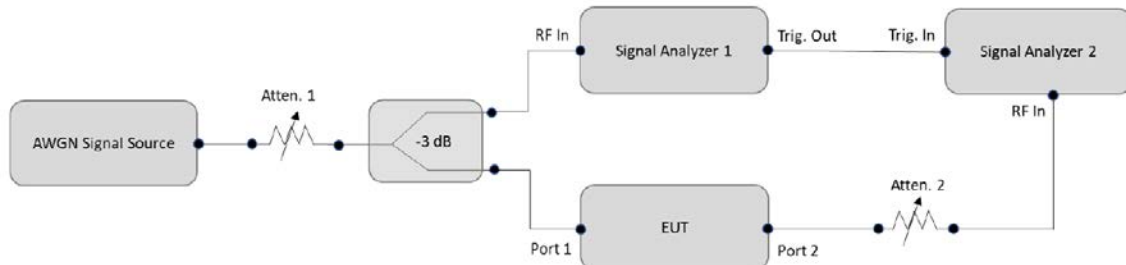

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Test Configuration. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Test Configuration.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

Sample Calculation

Incumbent signal Power(dBm) = Measured Value(dBm)

Modified Detection Limit(dBm) = Detection Limit(-62 dBm) + Antenna Gain(dBi)

8.7. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP


Limit

The power is no more than 30 dBm EIRP.(Standart Power AP)

The power is no more than 24 dBm EIRP.(Low Power indoor AP)

Test Configuration

The EUT was connected to a standard power&Low Power indoor 6GHz access point (CMX 500).

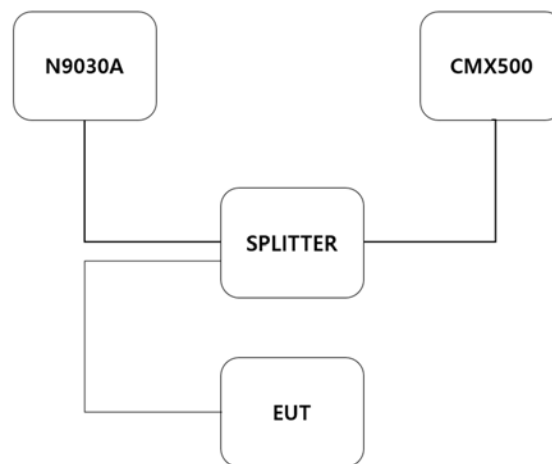

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect according to the test configuration.
2. Set up the client and AP (CMX500) to establish a connection and begin data transmission. It is important to configure the client to transmit at its maximum power level.
3. Verify the transmission between the client and the standard power AP (CMX500). Additional attenuators may be needed to protect the measurement equipment. Measure the client RF output using one of the methods in C63.10 for NII devices.
4. Simulate the client moving from outdoors to indoors. The client should connect to the low power indoor AP (CMX500). Verify the transmission between the client and the low power AP (CMX500).
5. Measure the RF output of the client device using the same method as in step 3. Verify that the output does not exceed 24 dBm EIRP.

Note

The test was executed with the emulator(CMX500) instead of the Std Power AP and Low Power AP.


8.8. Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

Limit

The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.

Test Configuration

The EUT was connected to a standard-power access point(CMX 500).

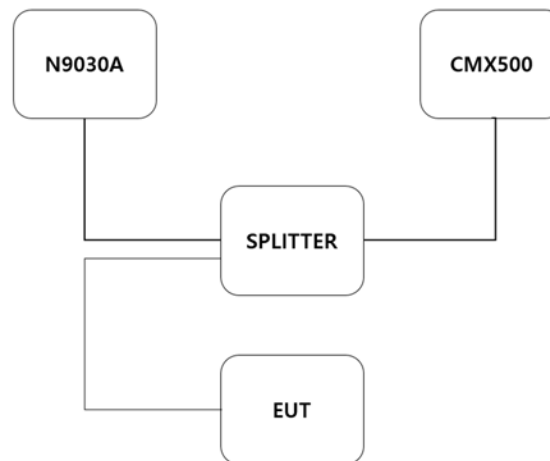

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect equipment as shown in Test Configuration.
2. Adjust Atten to Std Power AP(CMX500) so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure the Client and AP(CMX500) so that they associate and start sending data (stream data). The AP(CMX500) should be configured such that its registered power is 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP(CMX500). Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power, along with its antenna gain, to calculate the Client EIRP.
The Client EIRP should be minimally 6 dB lower than that of the AP(CMX500).
5. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

Note

The test was executed with the emulator(CMX500) instead of a standard-power access point.

Power measurement procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 12.3.2.7 in ANSI 63.10-2013.

1. Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
2. Set sweep trigger to "free run."
3. Set RBW = 1 MHz.
4. Set VBW $\geq 1 / T$, where T is defined in item a1) in 12.2.
5. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = peak.
8. Trace mode = max hold.
9. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.

Note

1. Both the dual client tests and the proper power adjustment tests used the same power measurement procedure.
2. The VBW $\geq 1/T$ value was calculated as follows: (On Time = 0.615 ms)
 $1/0.615 \text{ ms} = 3 \text{ kHz}$


8.9. Transmit Power Control, Very Low Power Devices

Limit

Very low-power devices operating in the 5.925–6.425 and 6.525–6.875 GHz bands shall employ a TPC mechanism. A very low-power device must demonstrate the capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

Test Configuration

The EUT was connected to CMX 500.

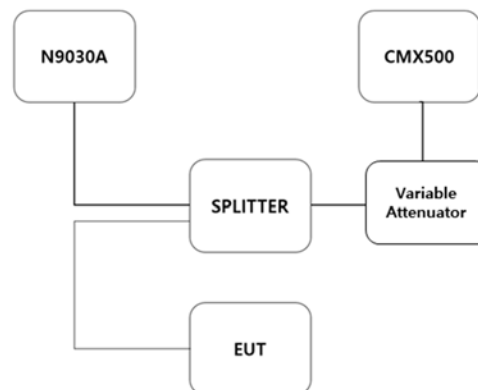

Test Procedure

We tested according to Procedure I in KDB 987594 D02

1. Set up according to the test configuration.
2. Connect the EUT to the CMX500 in VLP mode.
3. Set the variable attenuator to 10dB attenuation and maintain an environment free from external noise
4. Decrease variable attenuation and measure the spectral density (PSD) as high power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
5. Verify that the PSD power is $\leq -11\text{dBm/MHz}$.
6. Increase variable attenuation and measure the spectral density (PSD) as low power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
7. Verify that the PSD power is $\leq -5\text{dBm/MHz}$.

Measurement procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
 2. RBW = 1 MHz
 3. VBW $\geq$ 3 MHz
 4. Number of points in sweep $\geq 2 \times \text{span/RBW}$.
 5. Sweep time = auto.
 6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
 7. Do not use sweep triggering. Allow the sweep to “free run”.
 8. Trace average at least 100 traces in power averaging(RMS) mode
 9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
- If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

8.10. Radiated Test

Limit


1. For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

2. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

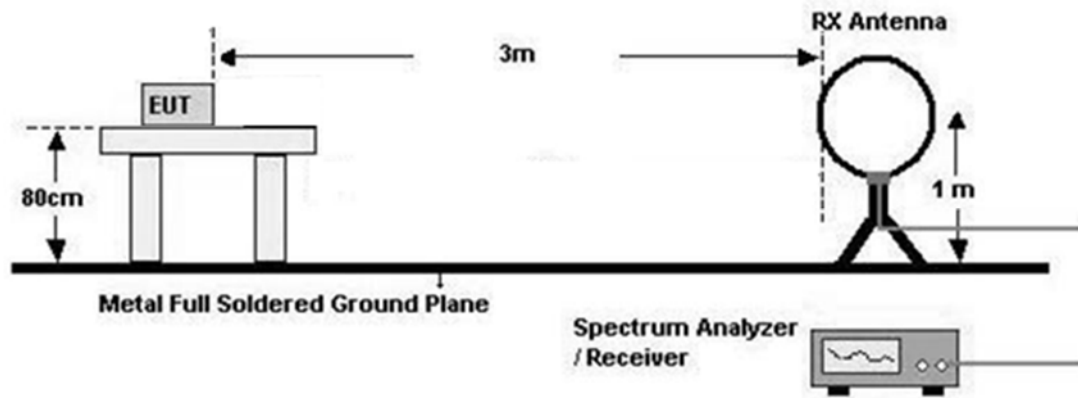

30 MHz - 1 GHz

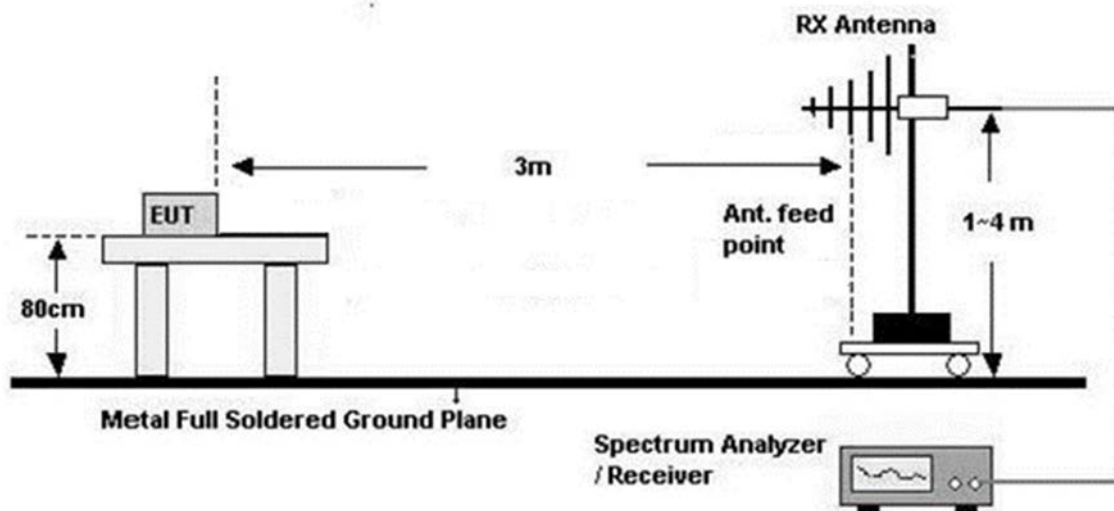

Above 1 GHz

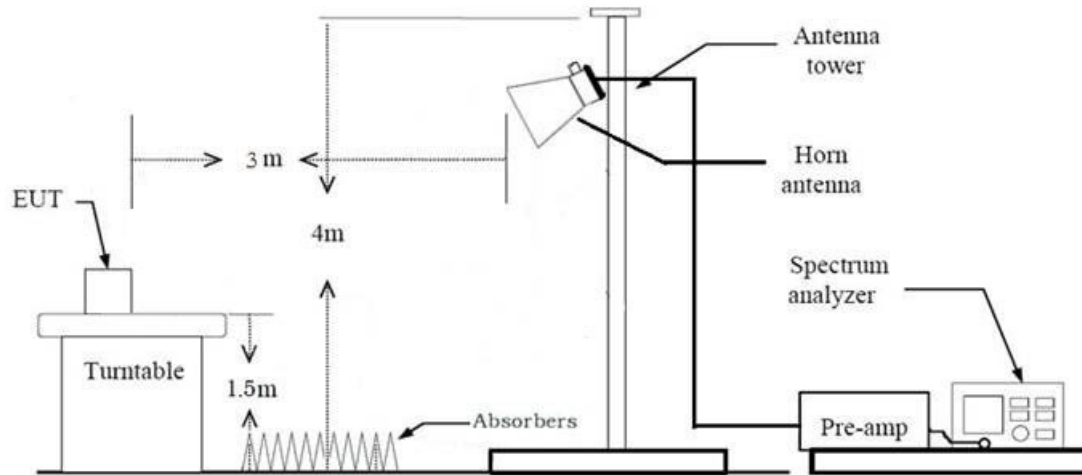

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW $\geq$ 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- Measured Frequency Range : 1 GHz – 40 GHz
- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

(2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq$ 98 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq$ 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz

- $VBW \geq 3 \times RBW$
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total(Measurement Type : Peak)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- + Duty Cycle Factor(D.C.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - $VBW \geq 3$ MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = Max Hold
 - Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq 98\%$
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz

- $VBW \geq 3 \times RBW$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- $VBW \geq 3 \times RBW$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.

9. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

10. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle ≥ 98 %)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)


= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ Duty Cycle Factor(D.C.F)

8.11. Frequency Stability

Limit

Maintained within the band

Test Configuration

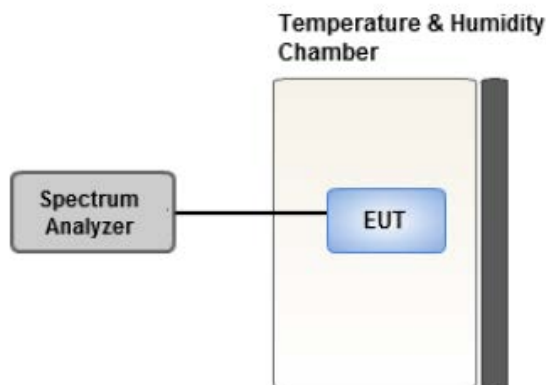

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.12. Test RU offset for Tones

[SRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-
40	26	0~17	0	9	17
	52	37~44	37	41	44
	106	53~56	53	54	56
	242	61~62	61	-	62
	484	65	-	65	-
80	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
160	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
320	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
	4x996	69	-	69	-

[MRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	52+26	70~72	70	71	72
	106+26	82~83	82	-	83
40	52+26	70~75	70	72	75
	106+26	82~85	82	83	85
80	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
160(80L/U)	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
160	996+484	94,95, 1094,1095	94	95	1095
	996+484+242	96~99 1096~1099	96	99	1099
320 (80LL/LM/MH/HH)	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
320(160U/L)	996+484	94,95, 1094,1095	94	95	1095
320	3x996	104,1104, 10104,11104	104,	1104	11104
	2x996+484	100,101,1101, 101012,11102,11103	100	1101	11103
	3x996+484	105,106,1106 10105,11105,11106	105	1106	11106

8.13. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
 - EHT20 : MCS 0
 - EHT40 : MCS 0
 - EHT80 : MCS 0
 - EHT160 : MCS 0
 - EHT320 : MCS 0
 - 802.11 a : 6 Mbps
2. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
3. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)
4. All MRU and channel puncturing combinations were investigated, and the results for each combination were the same. Therefore, I only attached the results for MRU.
5. The combination that only supports channel puncturing is 996+484+242, and the results for this combination have been attached.

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the worst case results are reported.
(Worst case : MCS0)
4. All Antenna of operation were investigated and the worst case results are reported
 - Mode : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
 - Worstcase : MIMO_CDD(Ant.1+Ant.2)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported
8. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)

[RSE Worst case]

Standard Client:	UNII 5, 7
Indoor Client	UNII 6, 8

Test		BW (MHz)	Tones (T)	Offset
RSE (Standard Client)	SRU	20	26	4
			242	61
		40	26	9
			484	65
		80	26	19
			996	67
		160	26 (160(80L))	19
			SU	-
	MRU	320	26 (320(80LL))	19
			4x996	69
		20	52+26	71
			106+26	82
		40	52+26	72
			106+26	83
		80	52+26	75
			484+242 (OFDMA)	91
		160	52+26 (160(80L))	75
			996+484+242 (Non-OFDMA)	99
		320	52+26 (320(80LL))	75
			996*3+484 (OFDMA)	1106
RSE (Indoor Client)	SRU	20	SU	-
		40	484	65
		80	996	67
		160	2x996T	68
		320	26 (320(80LL))	19

[Bandedge Worst case]

Standard Client:	UNII 5
Indoor Client	UNII 8

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	SRU	20	26	0	8
			52	37	40
			106	53	54
			242	61	61
			SU	-	-
		40	26	0	17
			52	37	44
			106	53	56
			242	61	62
			484	65	65
			SU	-	-
		80	26	0	36
			52	37	52
			106	53	60
			242	61	64
			484	65	66
			996	67	67
			SU	-	-
		160(80L)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		160(80U)	996	67	-
			2x996	68	-
			SU	-	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
			2x996	-	68
			SU	-	-
		320(80LL)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		320(80HH)	996	67	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
		320(160L)	2x996	68	-
		320(160U)	2x996	-	68
		320	4x996	69	69
			SU	-	-

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	MRU	20	52+26	70	72
			106+26	82	83
		40	52+26	70	75
			106+26	82	85
		80	52+26	70	81
			106+26	82	89
			484+242 (OFDMA)	93	90
		160(80L)	52+26	70	-
			106+26	82	-
			484+242	93	-
		160(80U)	52+26	-	81
			106+26	-	89
			484+242	-	90
		160	996+484 (OFDMA)	1095	94
			996+484+242 (Non-OFDMA)	1099	96
		320(80LL)	52+26	70	-
			106+26	82	-
			484+242	93	-
		320(80HH)	52+26	-	81
			106+26	-	89
			484+242	-	90
		320(160L)	996+484	1095	-
		320(160U)	996+484	-	94
		320	2x996+484 (OFDMA)	1101	10102
			3x996	11104	104
			3x996+484 (OFDMA)	11106	105

Radiated test(RSDB)

1. Please refer to the [DTS], [BT], [UNII]Test Report.
2. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, Keyboard etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)

9. SUMMARY OF TEST RESULTS & DATA REFERENCING

9.1. Test result

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Maximum transmitter channel bandwidth	§ 15.407(a)(11)	< 320 MHz	Conducted	PASS (Note ^{2,3})
Output Power Maximum EIRP	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) EIRP < 36 dBm Client(Connected to standard-Power Access Point) EIRP < 30 dBm Very low power devices EIRP < 14 dBm <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) EIRP < 30 dBm Client (Connected to Low-Power Access Point) EIRP < 24 dBm		PASS
Output Power Maximum EIRP Power Spectral Density	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) < 33 dBm/MHz (EIRP) Client(Connected to standard-Power Access Point) < 17 dBm/MHz (EIRP) Very low power devices < -5 dBm/MHz (EIRP) <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) < 5 dBm/MHz (EIRP) Client (Connected to Low-Power Access Point) < -1 dBm/MHz (EIRP)		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.407 (b)(9)	<FCC 15.207 limits		PASS
Contention Based Protocol	§ 15.407(d)(6)	Detect co-channel energy with 90% or greater certainty.		PASS (Note ¹)
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	§ 15.407(a)(7)	The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.		PASS
Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	§ 15.407(a)(7) § 15.407(a)(8)	EIRP < 30 dBm (Standard Power) EIRP < 24 dBm (Low Power Indoor)		PASS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TPC mechanism (VLP Device)	§ 15.407(d)(10)	EIRP PSD < -5 dBm/MHz (at least 6 dB below the maximum EIRP PSD)		PASS
In-Band Emissions (Emissions Mask)	§ 15.407(b)(7)	a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.) b. Suppressed by 28 dB at one channel bandwidth from the channel center. c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.		PASS
Undesirable Emissions	§ 15.407(b) § 15.35(b)	<-27 dBm/MHz EIRP (UNII5, 6, 7, 8)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

Note:

1. Bandwidth Reduction was used for incumbent avoidance.
2. FCC allows 99% bandwidth measurements for 320MHz BW mode.
Therefore, 99% bandwidth was used to demonstrate compliance for channels with a nominal bandwidth of 320 MHz (not less).
3. For channels with a nominal bandwidth less than 320MHz, compliance is demonstrated by way of the 26 dB bandwidth. For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99% bandwidth.

9.2. Data Referencing

Equipment Class	Rule Part	Test item	Data Referencing	Comments
6CD & 6VL	§ 15.407(a)(11)	Maximum transmitter channel bandwidth	Y	-
	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	Output Power Maximum EIRP	Y	-
	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	Output Power Maximum EIRP Power Spectral Density	Y	-
	15.407 (b)(9)	AC Conducted Emissions	Y	-
	§ 15.407(d)(6)	Contention Based Protocol	Y	-
	§ 15.407(g) § 2.1055	Frequency Stability	Y	-
	§ 15.407(a)(7)	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	Y	-
	§ 15.407(a)(7) § 15.407(a)(8)	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	Y	-
	§ 15.407(d)(10)	TPC mechanism (VLP Device)	Y	-
	§ 15.407(b)(7)	In-Band Emissions (Emissions Mask)	Y	-
	§ 15.407(b) § 15.35(b)	Undesirable Emissions	Y	Spot-check
	15.205, 15.407(b)(9),(10)	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Y	Spot-check

Spot-Check Result

1. Data was leveraged from model SM-S931U for the certification of SC-51F.
2. Please refer to the [FCC Evaluation] Report.

10. TEST RESULT

10.1 DUTY CYCLE

10.1.1 802.11 be SRU Duty Cycle

Mode	Tones	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be (EHT20)	26	MCS0	4.578	4.595	0.996	0.016
	52	MCS0	4.565	4.586	0.995	0.020
	106	MCS0	2.492	2.509	0.993	0.029
	242	MCS0	1.125	1.141	0.986	0.063
802.11be (EHT40)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.565	4.583	0.996	0.017
	106	MCS0	2.490	2.508	0.993	0.031
	242	MCS0	1.121	1.139	0.984	0.068
	484	MCS0	0.607	0.625	0.972	0.124
802.11be (EHT80)	26	MCS0	4.580	4.595	0.997	0.014
	52	MCS0	4.565	4.585	0.996	0.019
	106	MCS0	2.490	2.508	0.993	0.031
	242	MCS0	1.122	1.140	0.984	0.068
	484	MCS0	0.608	0.625	0.973	0.119
	996	MCS0	0.600	0.617	0.973	0.120
802.11be (EHT160)80L	26	MCS0	4.580	4.595	0.997	0.014
	52	MCS0	4.570	4.585	0.997	0.014
	106	MCS0	2.489	2.509	0.992	0.034
	242	MCS0	1.122	1.140	0.985	0.068
	484	MCS0	0.608	0.625	0.973	0.119
	996	MCS0	0.601	0.617	0.974	0.115
802.11be (EHT160)	2x996	MCS0	0.598	0.615	0.974	0.116
802.11be (EHT320)80LM	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.568	4.586	0.996	0.017
	106	MCS0	2.490	2.506	0.994	0.028
	242	MCS0	1.123	1.140	0.985	0.067
	484	MCS0	0.608	0.625	0.973	0.119
	996	MCS0	0.601	0.617	0.974	0.115
802.11be(EHT320) 160L	2x996	MCS0	0.598	0.615	0.973	0.121
802.11be(EHT320)	4x996	MCS0	0.370	0.386	0.958	0.186
802.11be (SU)	BW 20	MCS0	5.452	5.472	0.996	0.016
	BW 40	MCS0	5.457	5.472	0.997	0.012
	BW 80	MCS0	5.457	5.472	0.997	0.012
	BW 160	MCS0	5.457	5.472	0.997	0.012
	BW 320	MCS0	5.457	5.472	0.997	0.012

10.1.2 802.11 a Duty Cycle

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6 Mbps	1.466	1.562	0.939	0.275

Note: Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = T_{on} / T_{total}

10.1.3 802.11 be MRU Duty Cycle


Mode	Tones	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be (EHT20)	52+26	MCS0	3.503	3.524	0.994	0.026
802.11be (EHT20)	106+26	MCS0	2.031	2.048	0.992	0.036
802.11be (EHT40)	52+26	MCS0	3.501	3.516	0.996	0.019
802.11be (EHT40)	106+26	MCS0	2.028	2.046	0.991	0.040
802.11be (EHT80)	52+26	MCS0	3.503	3.521	0.995	0.022
802.11be (EHT80)	106+26	MCS0	2.030	2.046	0.992	0.035
802.11be (EHT80)	484+242	MCS0	0.814	0.830	0.981	0.085
802.11be (EHT160)80L	52+26	MCS0	3.503	3.520	0.995	0.021
802.11be (EHT160)80L	106+26	MCS0	2.031	2.048	0.992	0.036
802.11be (EHT160)80L	484+242	MCS0	0.814	0.831	0.980	0.090
802.11be (EHT160)	996+484	MCS0	0.785	0.801	0.980	0.088
802.11be (EHT160)	996+484+242	MCS0	5.457	5.472	0.997	0.012
802.11be (EHT320)80LM	52+26	MCS0	3.503	3.520	0.995	0.021
802.11be (EHT320)80LM	106+26	MCS0	2.028	2.046	0.991	0.040
802.11be (EHT320)80LM	484+242	MCS0	0.814	0.831	0.980	0.090
802.11be (EHT320)160L	996+484	MCS0	0.785	0.802	0.979	0.093
802.11be (EHT320)	3x996	MCS0	0.422	0.438	0.963	0.162
802.11be (EHT320)	2x996+484	MCS0	0.493	0.510	0.967	0.147
802.11be (EHT320)	3x996+484	MCS0	0.370	0.387	0.957	0.191

Test Plots


Note: In order to simplify the report, attached plots were only the lowest datarate.

[SRU]


802.11be EHT 20 Ch.2(5935 MHz) 26 Tones MCS0

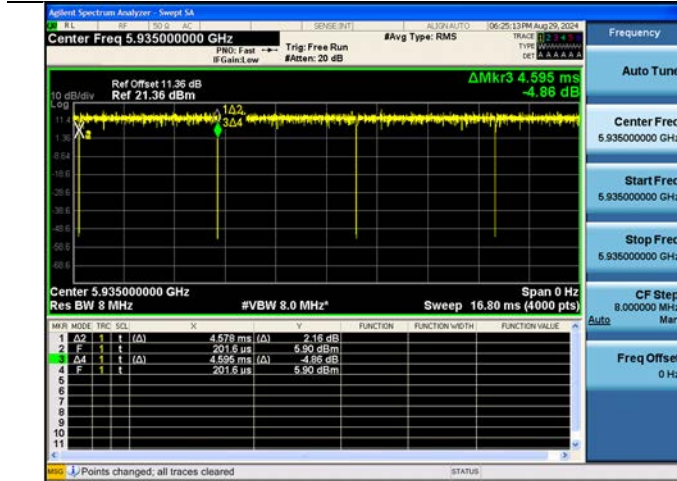


802.11be EHT 20 Ch.2(5935 MHz) SU MCS0

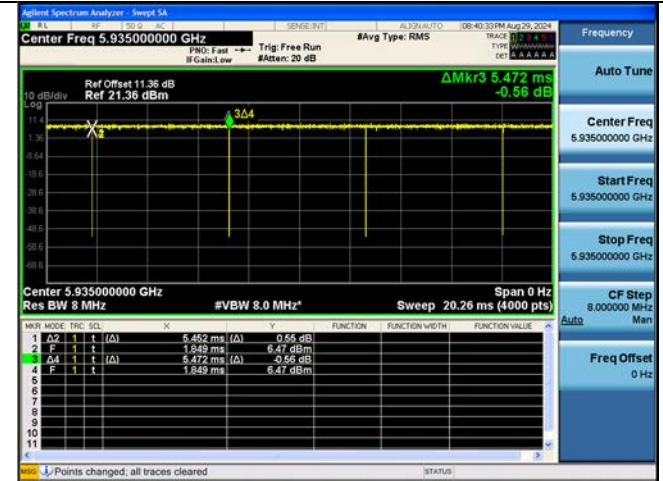


802.11be EHT 40 Ch.3(5965 MHz) 26 Tones MCS0

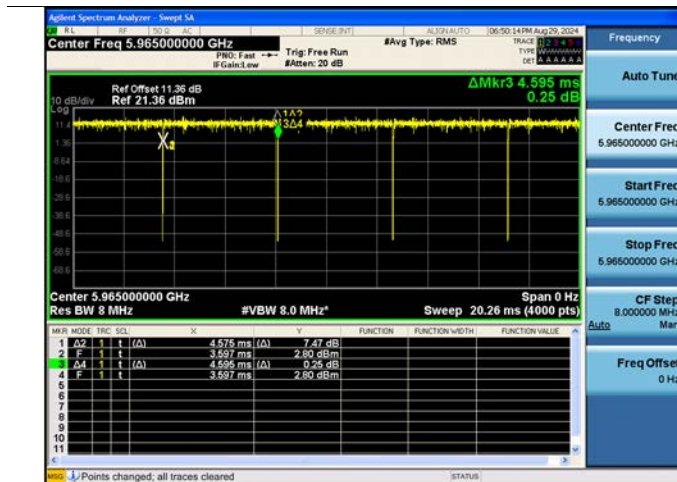


802.11be EHT 40 Ch.3(5965 MHz) SU MCS0

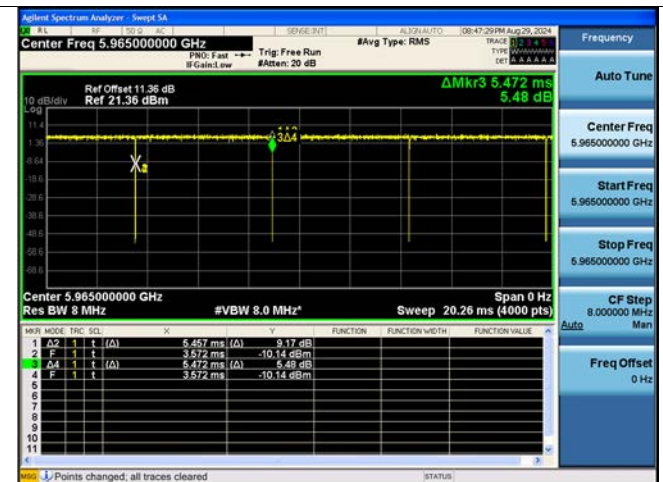


802.11be EHT 80 Ch.7(5985 MHz) 26 Tones MCS0

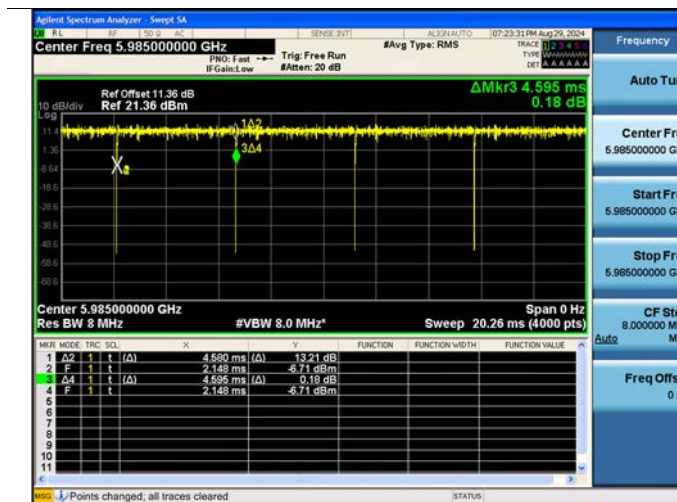


802.11be EHT 80 Ch.7(5985 MHz) SU MCS0

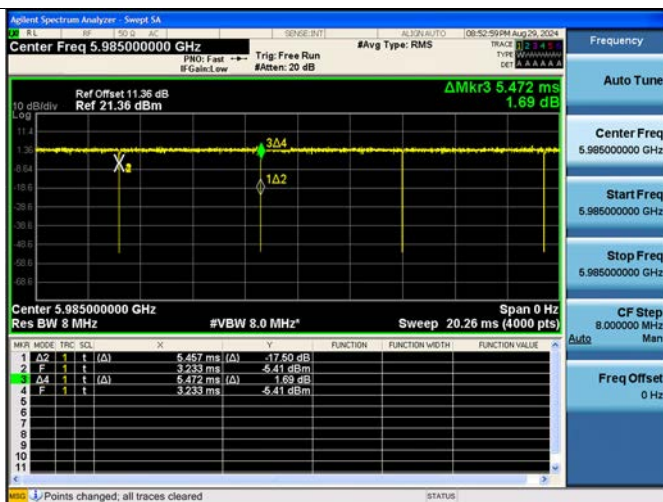


802.11be EHT 160 Ch.15(6025 MHz) 26 Tones MCS0

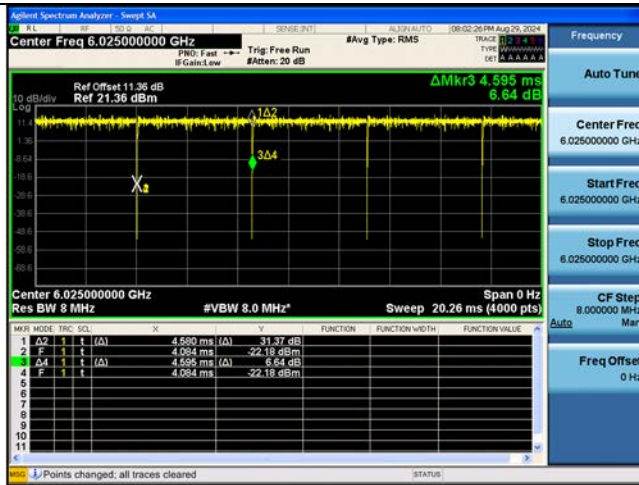


802.11be EHT 160 Ch.15(6025 MHz) 2x996T MCS0

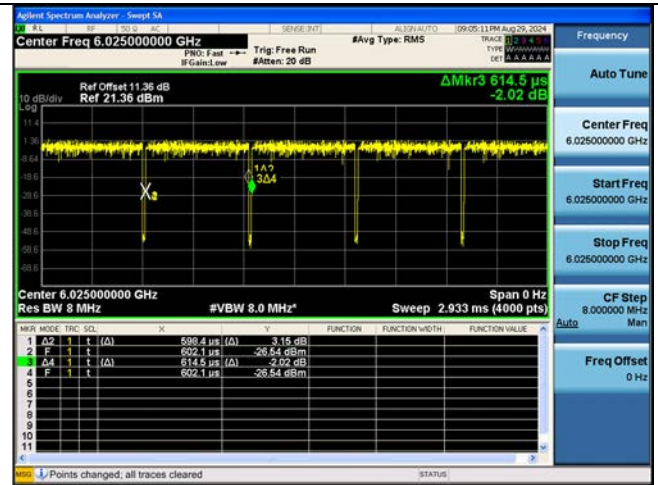


802.11be EHT 160 Ch.15(6025 MHz) SU MCS0

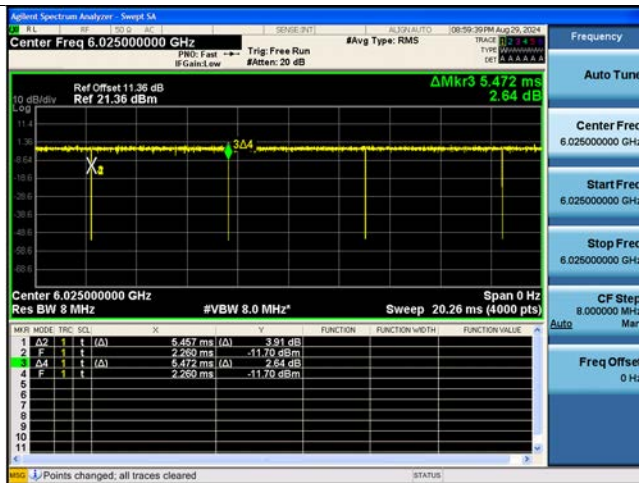


802.11be EHT 320 Ch.127(6585 MHz) 26 Tones MCS0

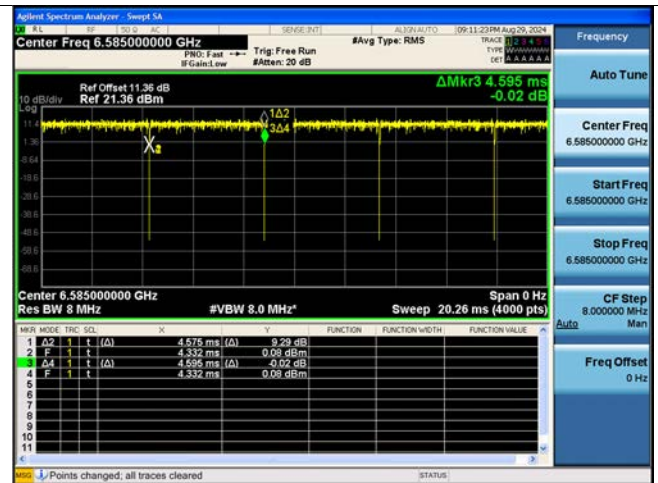

802.11be EHT 320 Ch.127(6585 MHz) 2x996T MCS0


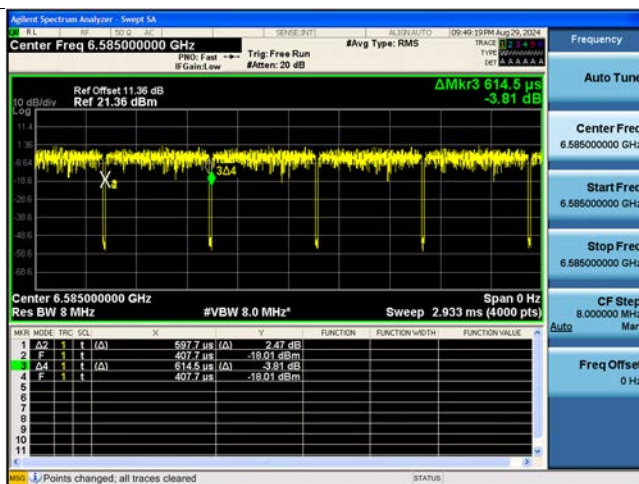


802.11be EHT 320 Ch.31(6105 MHz) 4x996T MCS0

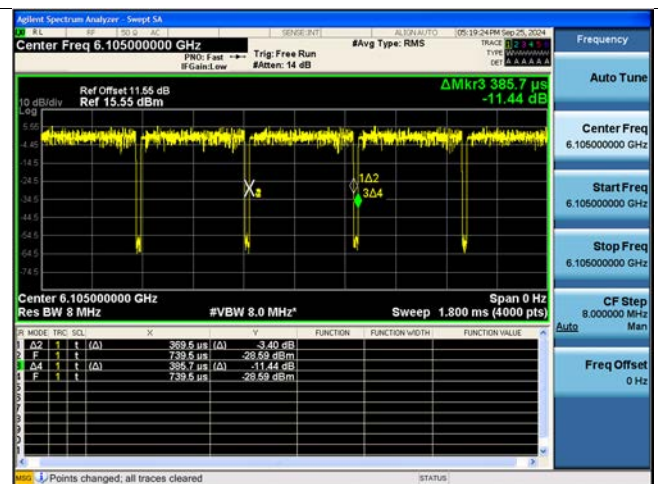


802.11be EHT 320 Ch.127(6585 MHz) SU

802.11a Ch.2(5935 MHz) 6 Mbps

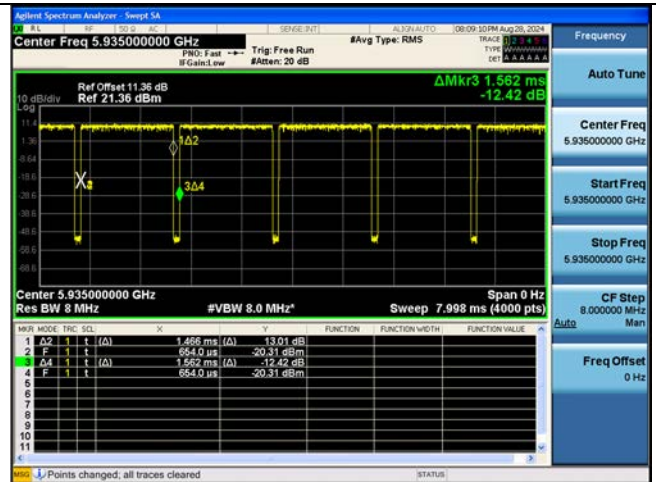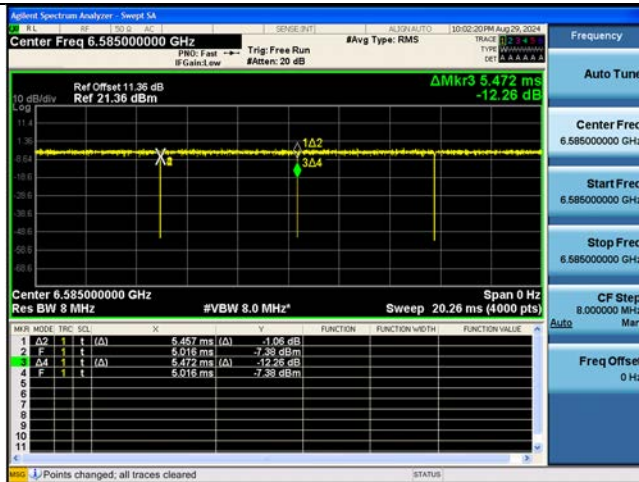

[MRU]


802.11be EHT 20 Ch.2(5935 MHz) 52T + 26T

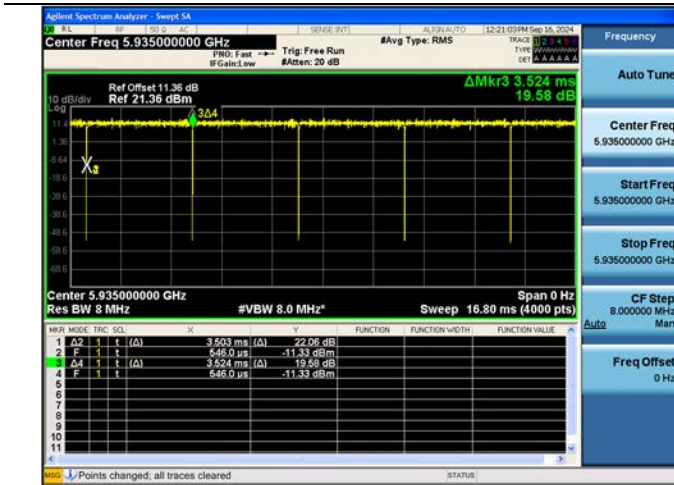


802.11be EHT 20 Ch.2(5935 MHz) 106T + 26T




802.11be EHT 40 Ch.3(5965 MHz) 52T + 26T

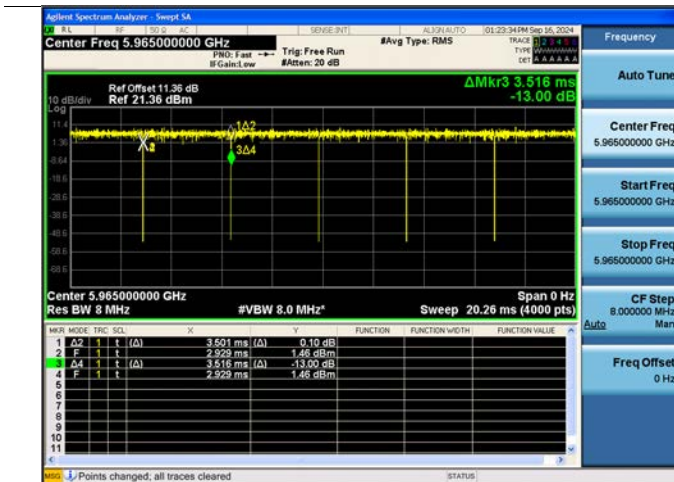


802.11be EHT 40 Ch.3(5965 MHz) 106T + 26T

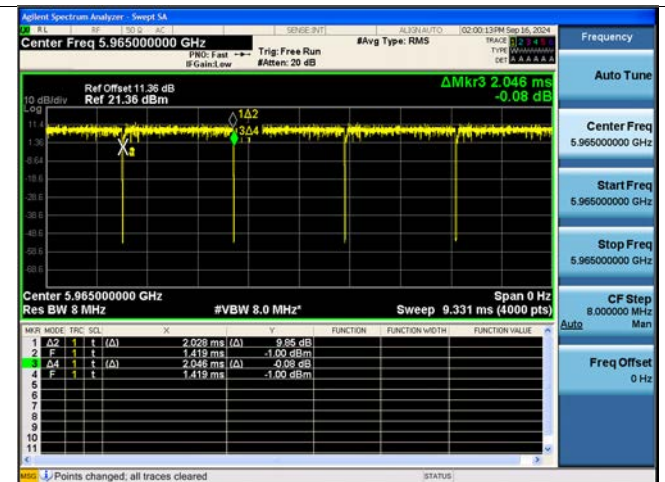


802.11be EHT 80 Ch.7(5985 MHz) 52T + 26T

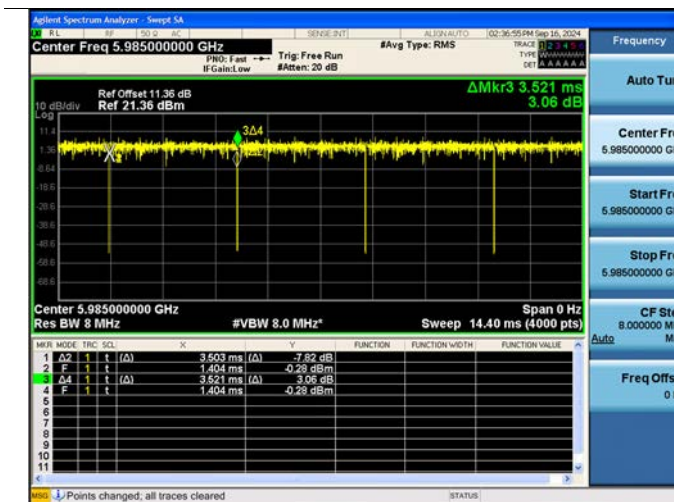


802.11be EHT 80 Ch.7(5985 MHz) 106T + 26T

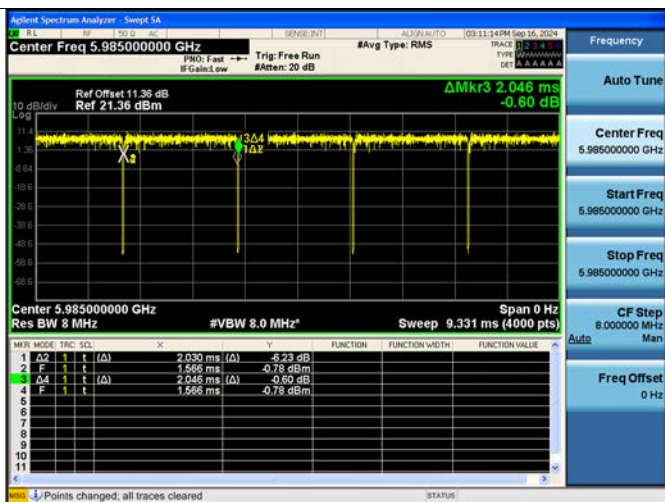


802.11be EHT 80 Ch.7(5985 MHz) 484T + 242T

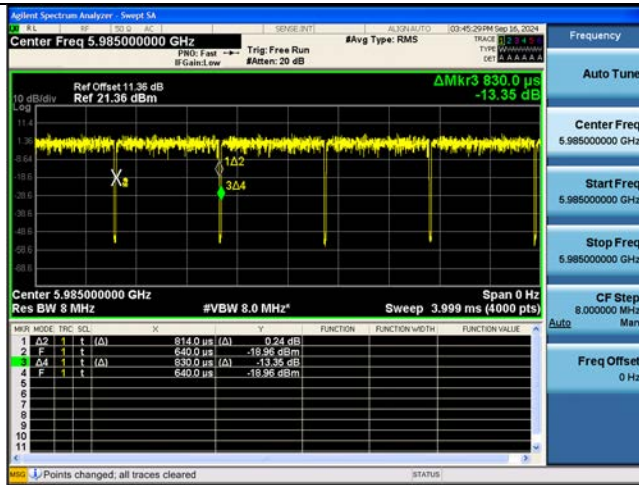


802.11be EHT 160 Ch.15(6025MHz) 52T + 26T

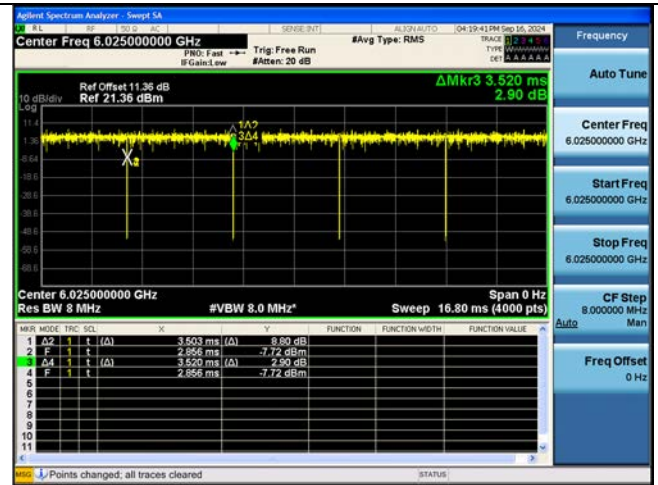


802.11be EHT 160 Ch.15(6025MHz) 106T + 26T

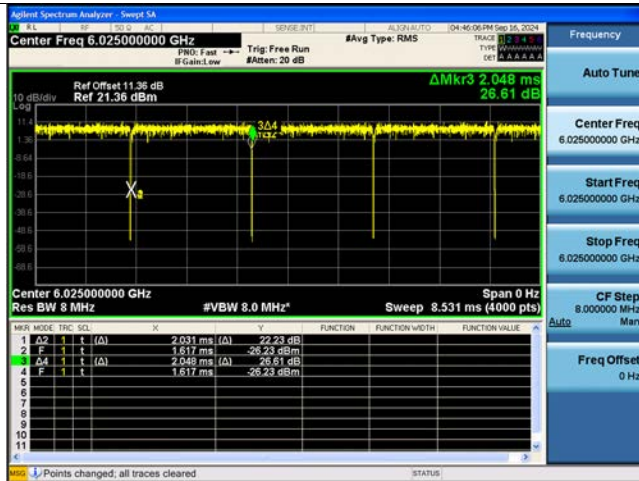

802.11be EHT 160 Ch.15(6025MHz) 484T + 242T

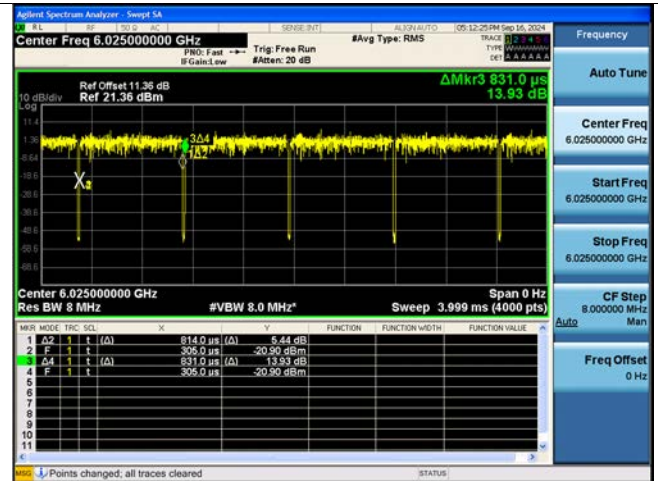


802.11be EHT 160 Ch.15(6025MHz) 996T + 484T

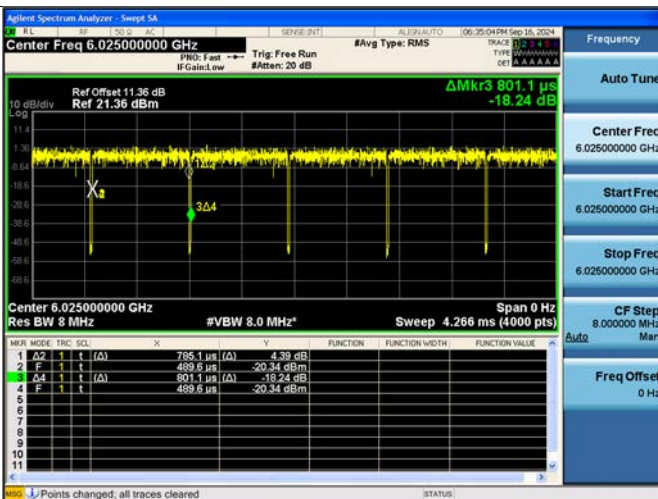


802.11be EHT 160 Ch.15(6025MHz) 996T + 484T + 242T




802.11be EHT 320 Ch.31(6105MHz) 52T + 26T

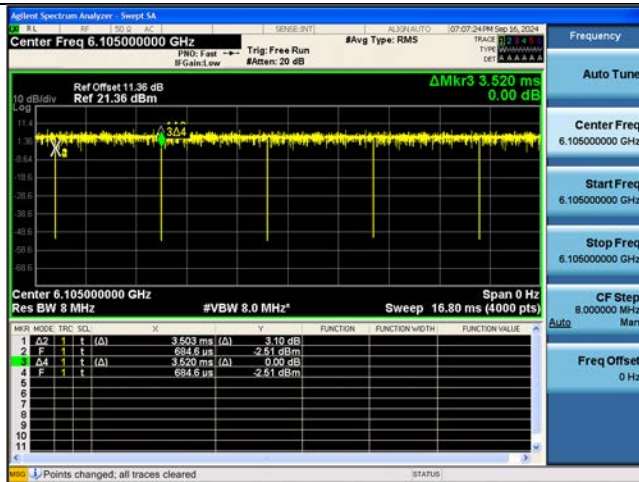


802.11be EHT 320 Ch.31(6105MHz) 106T + 26T

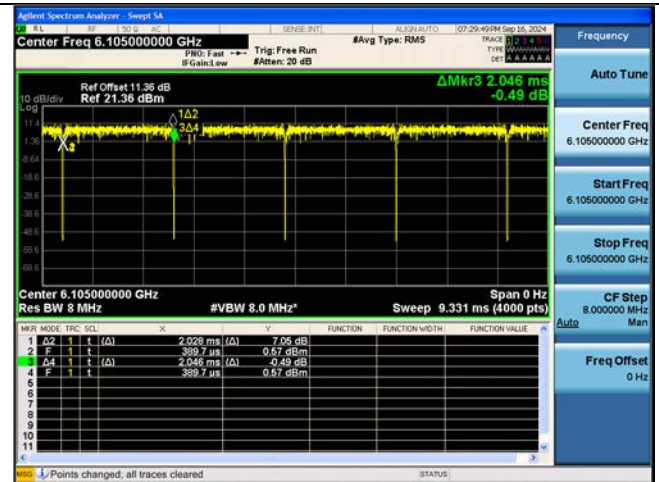


802.11be EHT 320 Ch.31(6105MHz) 484T + 242T

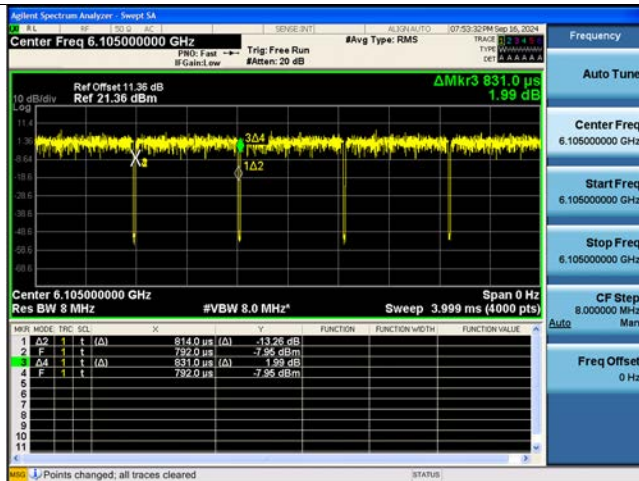


802.11be EHT 320 Ch.31(6105MHz) 996T + 484T

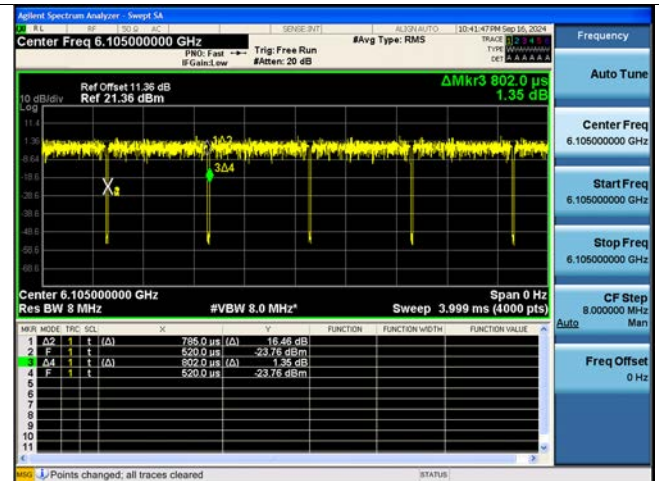


802.11be EHT 320 Ch.31(6105MHz) 3x996T

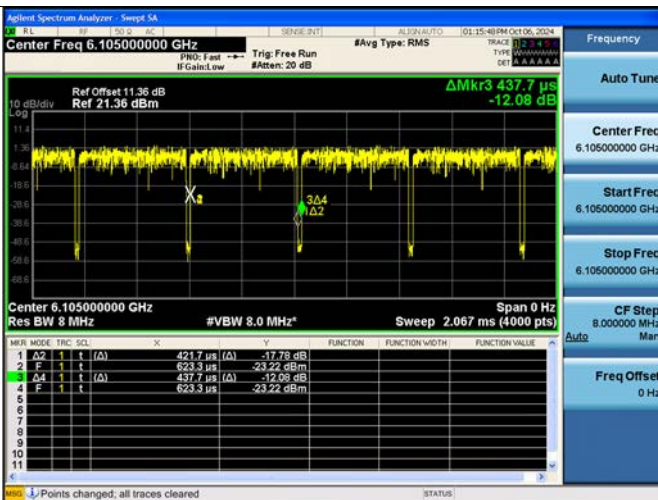

802.11be EHT 320 Ch.31(6105MHz) 2x996T + 484T

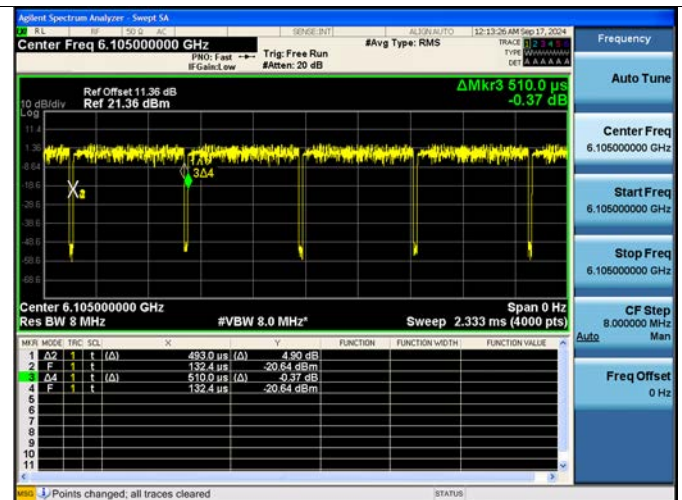

802.11be EHT 320 Ch.31(6105MHz) 3x996T + 484T

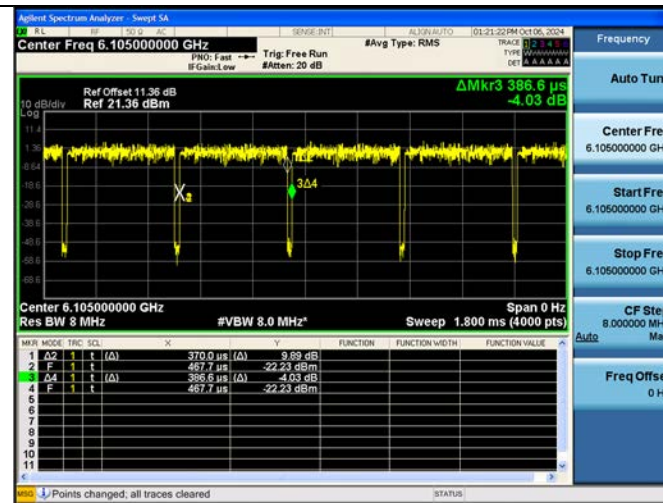

10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH

10.2.1 26 dB BANDWIDTH(Indoor client)

10.2.1.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.45	18.00	19.55	18.005	17.104	18.206
	6175	45	19.37	17.96	19.49	18.056	16.773	18.315
	6415	93	19.35	18.05	19.71	18.197	16.762	18.284
UNII6	6435	97	18.79	16.37	19.52	17.648	15.397	18.325
	6475	105	19.31	17.97	19.58	18.285	16.990	18.326
	6515	113	17.80	17.91	19.54	16.527	15.908	18.221
UNII7	6535	117	19.29	17.98	19.64	18.218	16.947	18.122
	6695	149	19.38	18.02	19.46	18.028	16.771	17.667
	6855	181	19.29	17.94	19.48	18.244	17.018	18.146
UNII8	6875	185	19.39	18.07	19.60	17.939	17.095	18.325
	6995	209	19.40	18.05	19.60	17.937	17.068	18.210
	7115	233	19.31	17.66	19.53	18.225	16.403	17.783

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.68	18.27	19.48	18.068	16.571	17.736
	6175	45	19.03	18.22	19.56	17.483	16.788	18.189
	6415	93	19.72	18.67	19.46	18.113	17.065	18.126
UNII6	6435	97	19.43	18.54	19.58	18.250	17.010	18.034
	6475	105	19.59	18.45	19.50	18.170	17.015	17.968
	6515	113	19.46	18.53	19.74	18.174	16.482	18.042
UNII7	6535	117	19.61	17.04	19.53	17.982	15.998	17.836
	6695	149	19.66	18.61	19.58	18.164	16.383	18.077
	6855	181	19.60	18.61	19.57	18.139	16.225	18.157
UNII8	6875	185	19.54	16.83	19.55	18.180	15.848	18.208
	6995	209	19.61	18.26	19.70	18.065	17.108	18.128
	7115	233	19.68	18.05	19.63	18.192	16.488	17.767

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.57	-	20.32	18.139	-	18.060
	6175	45	19.66	-	20.23	18.139	-	18.202
	6415	93	19.72	-	20.26	18.047	-	18.201
UNII6	6435	97	19.47	-	20.47	18.143	-	18.192
	6475	105	19.42	-	20.23	18.148	-	18.152
	6515	113	19.56	-	20.22	18.136	-	18.199
UNII7	6535	117	19.71	-	20.18	18.187	-	18.157
	6695	149	19.33	-	20.11	17.751	-	18.144
	6855	181	19.68	-	20.05	18.185	-	18.015
UNII8	6875	185	19.41	-	20.30	18.216	-	18.041
	6995	209	19.64	-	20.10	18.009	-	18.073
	7115	233	19.61	-	19.45	18.124	-	18.075

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.85	-	-	19.030	-
	6175	45	-	20.97	-	-	19.042	-
	6415	93	-	20.98	-	-	19.038	-
UNII6	6435	97	-	21.02	-	-	19.038	-
	6475	105	-	20.98	-	-	19.033	-
	6515	113	-	21.01	-	-	19.035	-
UNII7	6535	117	-	20.96	-	-	19.027	-
	6695	149	-	21.04	-	-	19.030	-
	6855	181	-	21.04	-	-	19.039	-
UNII8	6875	185	-	21.02	-	-	19.033	-
	6995	209	-	20.98	-	-	19.039	-
	7115	233	-	20.99	-	-	19.042	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.53	-	-	19.016	-
	6175	45	-	21.32	-	-	19.023	-
	6415	93	-	21.38	-	-	19.049	-
UNII6	6435	97	-	21.40	-	-	19.008	-
	6475	105	-	21.46	-	-	19.032	-
	6515	113	-	21.27	-	-	19.021	-
UNII7	6535	117	-	21.38	-	-	19.053	-
	6695	149	-	21.43	-	-	19.002	-
	6855	181	-	21.22	-	-	18.986	-
UNII8	6875	185	-	21.28	-	-	19.004	-
	6995	209	-	21.57	-	-	19.026	-
	7115	233	-	21.28	-	-	19.019	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	19.92	21.57	20.68	18.334	20.099	18.378
	6165	43	20.32	21.15	20.27	18.530	20.027	18.544
	6405	91	20.13	21.95	20.10	18.403	20.106	18.442
UNII6	6445	99	19.99	22.58	20.49	18.312	20.383	18.639
	6485	107	20.04	22.09	20.02	18.406	20.358	18.523
	6525	115	19.83	22.00	20.98	18.383	20.081	18.456
UNII7	6565	123	20.25	21.76	21.13	18.403	19.997	18.306
	6685	147	19.84	21.80	21.15	18.343	20.224	18.392
	6845	179	19.75	21.95	20.87	18.438	19.640	18.543
UNII8	6885	187	19.65	22.24	21.21	18.238	20.098	18.475
	7005	211	19.56	22.16	20.25	18.133	20.166	18.361
	7085	227	20.20	22.27	20.05	18.390	20.187	17.896

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.73	22.93	25.33	18.221	19.673	18.363
	6165	43	20.55	21.85	23.74	18.257	19.947	18.071
	6405	91	19.75	22.84	20.93	17.778	19.922	18.351
UNII6	6445	99	20.98	23.18	22.33	17.633	19.545	18.367
	6485	107	20.86	23.64	25.13	18.226	19.620	18.411
	6525	115	20.27	22.64	20.93	18.191	19.811	18.302
UNII7	6565	123	20.83	22.76	22.85	18.070	19.429	18.354
	6685	147	20.53	22.72	20.49	18.195	19.792	18.470
	6845	179	20.63	23.42	22.91	18.038	20.031	18.397
UNII8	6885	187	20.55	22.75	22.96	18.156	19.872	17.916
	7005	211	20.16	22.94	25.15	18.149	19.804	18.331
	7085	227	20.29	22.64	24.06	18.176	19.945	18.516

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	21.82	29.89	26.23	18.017	19.476	18.151
	6165	43	31.17	30.68	26.59	17.897	19.216	18.479
	6405	91	31.22	30.18	26.32	18.028	19.131	18.251
UNII6	6445	99	23.15	23.19	27.74	17.990	19.290	18.113
	6485	107	31.18	23.79	26.28	18.086	19.313	18.235
	6525	115	21.93	30.15	27.33	18.067	19.265	18.127
UNII7	6565	123	31.17	23.67	26.39	18.070	19.046	18.163
	6685	147	23.29	23.47	26.22	17.891	19.213	18.228
	6845	179	22.06	23.98	25.96	17.957	19.055	18.358
UNII8	6885	187	21.95	23.58	27.88	18.047	19.144	18.219
	7005	211	21.17	24.17	27.76	17.978	18.794	18.095
	7085	227	21.70	23.34	27.81	17.967	19.450	18.161

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.87	-	35.62	19.399	-	19.893
	6165	43	34.91	-	35.40	19.386	-	19.957
	6405	91	34.43	-	35.95	19.359	-	19.864
UNII6	6445	99	34.94	-	35.80	19.382	-	19.777
	6485	107	34.62	-	36.11	19.415	-	19.620
	6525	115	34.99	-	36.03	19.344	-	20.277
UNII7	6565	123	34.78	-	36.36	19.414	-	19.784
	6685	147	34.74	-	35.99	19.425	-	19.751
	6845	179	34.51	-	36.15	19.409	-	20.470
UNII8	6885	187	34.82	-	35.90	19.380	-	19.779
	7005	211	34.79	-	36.31	19.368	-	19.875
	7085	227	34.72	-	36.24	19.390	-	19.763

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.61	-	-	37.901	-
	6165	43	-	41.65	-	-	37.996	-
	6405	91	-	41.80	-	-	38.003	-
UNII6	6445	99	-	42.11	-	-	38.013	-
	6485	107	-	41.40	-	-	37.967	-
	6525	115	-	41.36	-	-	37.930	-
UNII7	6565	123	-	41.61	-	-	37.989	-
	6685	147	-	41.68	-	-	37.979	-
	6845	179	-	41.29	-	-	37.998	-
UNII8	6885	187	-	41.42	-	-	37.998	-
	7005	211	-	41.45	-	-	38.000	-
	7085	227	-	41.52	-	-	37.982	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.47	-	-	37.975	-
	6165	43	-	42.31	-	-	37.997	-
	6405	91	-	43.05	-	-	37.962	-
UNII6	6445	99	-	42.19	-	-	37.956	-
	6485	107	-	42.32	-	-	37.969	-
	6525	115	-	42.45	-	-	37.939	-
UNII7	6565	123	-	42.00	-	-	37.965	-
	6685	147	-	42.81	-	-	37.956	-
	6845	179	-	42.22	-	-	37.918	-
UNII8	6885	187	-	42.21	-	-	37.975	-
	7005	211	-	42.26	-	-	37.964	-
	7085	227	-	42.08	-	-	37.966	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	24.96	25.28	22.22	19.844	22.140	20.079
	6145	39	25.59	24.72	26.13	20.430	22.186	20.506
	6385	87	21.25	28.21	25.06	19.542	22.346	19.967
UNII6	6465	103	22.02	24.85	24.47	19.801	21.746	19.311
	6545	119	25.82	25.89	24.27	20.376	22.232	19.971
UNII7	6625	135	21.45	25.82	22.42	19.960	21.609	20.320
	6705	151	22.38	25.38	24.67	20.248	22.124	20.505
	6785	167	21.39	28.30	21.45	19.743	20.539	19.904
UNII8	6865	183	21.78	26.53	27.08	19.502	21.942	20.065
	6945	199	24.49	24.61	25.52	19.866	22.037	20.702
	7025	215	20.96	22.79	21.01	19.567	21.562	19.652

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.61	32.87	24.50	19.986	22.449	20.303
	6145	39	26.77	30.50	28.03	20.159	22.725	21.013
	6385	87	25.84	26.65	27.96	19.712	21.941	20.063
UNII6	6465	103	29.79	30.19	28.43	19.241	22.186	20.631
	6545	119	28.24	27.42	25.00	19.411	22.207	19.771
UNII7	6625	135	26.29	31.07	29.19	20.118	22.463	20.594
	6705	151	27.95	33.69	27.63	20.104	22.044	20.353
	6785	167	28.31	33.01	28.51	19.807	22.236	20.292
UNII8	6865	183	20.62	30.38	29.04	17.765	23.203	18.524
	6945	199	29.43	33.49	26.55	20.395	20.680	20.341
	7025	215	28.39	32.90	26.90	20.134	22.127	20.325

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.37	30.62	28.31	19.177	21.678	20.126
	6145	39	28.71	32.76	30.44	19.694	21.879	20.128
	6385	87	28.89	36.38	30.66	19.481	21.904	20.181
UNII6	6465	103	28.40	32.89	27.73	19.650	21.204	19.262
	6545	119	28.60	34.44	28.29	19.942	21.886	21.107
UNII7	6625	135	29.02	34.20	28.51	19.528	21.971	19.537
	6705	151	29.00	34.25	30.26	19.111	21.619	20.068
	6785	167	28.48	34.12	26.63	19.319	21.407	19.394
UNII8	6865	183	28.94	33.57	28.41	19.246	21.379	19.790
	6945	199	29.03	34.89	29.83	19.139	21.543	19.770
	7025	215	28.54	34.30	28.94	19.021	21.920	20.534

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	30.97	34.61	30.87	22.241	23.152	22.442
	6145	39	32.17	35.83	32.78	22.510	23.013	22.543
	6385	87	32.93	35.29	32.64	22.436	22.566	22.658
UNII6	6465	103	33.04	35.12	32.22	22.196	23.112	22.579
	6545	119	33.17	36.71	32.33	22.522	23.522	22.561
UNII7	6625	135	33.05	35.33	35.74	22.264	22.575	23.623
	6705	151	33.35	35.14	30.93	22.119	23.413	22.544
	6785	167	32.81	35.97	30.96	22.296	23.633	22.295
UNII8	6865	183	33.87	35.42	33.47	21.864	23.289	23.138
	6945	199	32.73	33.89	32.66	21.972	22.822	22.605
	7025	215	35.40	35.75	32.21	22.289	23.249	22.971

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	68.23	-	70.84	53.261	-	43.346
	6145	39	69.48	-	71.71	53.158	-	43.413
	6385	87	67.02	-	70.96	53.952	-	43.006
UNII6	6465	103	69.28	-	71.39	52.389	-	43.489
	6545	119	68.98	-	72.54	53.371	-	43.384
UNII7	6625	135	69.45	-	72.77	53.111	-	43.608
	6705	151	69.30	-	70.32	53.182	-	43.524
	6785	167	68.99	-	71.72	53.714	-	43.858
UNII8	6865	183	68.45	-	71.74	53.027	-	43.606
	6945	199	68.70	-	72.72	52.675	-	45.472
	7025	215	68.74	-	72.72	52.684	-	45.076

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.05	-	-	77.778	-
	6145	39	-	86.84	-	-	77.705	-
	6385	87	-	86.44	-	-	77.726	-
UNII6	6465	103	-	87.38	-	-	77.770	-
	6545	119	-	88.43	-	-	77.774	-
UNII7	6625	135	-	88.48	-	-	77.779	-
	6705	151	-	86.63	-	-	77.738	-
	6785	167	-	87.22	-	-	77.710	-
UNII8	6865	183	-	87.31	-	-	77.810	-
	6945	199	-	88.25	-	-	77.770	-
	7025	215	-	144.4	-	-	78.332	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.41	-	-	77.665	-
	6145	39	-	88.08	-	-	77.808	-
	6385	87	-	87.69	-	-	77.747	-
UNII6	6465	103	-	87.95	-	-	77.694	-
	6545	119	-	87.93	-	-	77.794	-
UNII7	6625	135	-	87.94	-	-	77.691	-
	6705	151	-	88.32	-	-	77.865	-
	6785	167	-	86.70	-	-	77.717	-
UNII8	6865	183	-	87.72	-	-	77.838	-
	6945	199	-	89.19	-	-	77.716	-
	7025	215	-	145.5	-	-	78.234	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	27.83	29.30	27.82	22.424	25.387	25.585
	6185	47	24.65	30.24	28.62	22.551	26.860	25.927
	6345	79	26.85	30.32	27.70	22.104	25.473	28.608
UNII6	6505	111	24.27	28.41	25.76	24.631	24.363	26.308
UNII7	6665	143	27.82	26.60	27.93	23.494	25.566	27.129
UNII8	6825	175	26.60	27.37	30.13	23.761	25.796	26.885
	6985	207	24.23	27.02	29.10	22.273	25.873	27.412

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	29.15	32.68	32.81	22.543	26.149	26.781
	6185	47	27.92	33.33	34.12	21.853	25.794	26.922
	6345	79	30.56	38.42	36.00	22.614	25.954	28.368
UNII6	6505	111	27.22	31.50	31.65	22.198	25.868	28.185
UNII7	6665	143	27.99	31.88	29.67	23.570	25.906	26.129
UNII8	6825	175	26.78	32.23	30.43	21.435	22.118	25.793
	6985	207	28.91	31.82	32.99	21.642	26.718	25.519

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	34.45	42.34	37.46	23.322	26.282	24.897
	6185	47	37.04	35.43	35.76	23.943	24.584	25.363
	6345	79	37.23	32.18	34.43	24.317	23.607	25.223
UNII6	6505	111	37.27	35.05	37.43	23.700	25.497	24.435
UNII7	6665	143	33.59	38.27	38.17	23.731	24.469	24.692
UNII8	6825	175	37.80	37.94	38.25	24.779	26.104	24.543
	6985	207	36.39	41.47	35.33	22.389	27.341	24.198

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	44.18	45.47	44.17	28.834	26.805	27.168
	6185	47	47.65	42.15	45.65	30.085	28.634	26.760
	6345	79	39.60	45.53	45.02	28.251	28.181	27.718
UNII6	6505	111	44.64	45.37	44.95	27.883	28.087	27.021
UNII7	6665	143	43.02	43.96	44.07	27.873	26.702	25.989
UNII8	6825	175	44.08	49.33	44.69	28.507	28.209	26.723
	6985	207	42.96	43.28	44.23	27.217	26.141	26.343

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	68.21	-	104.3	43.149	-	49.518
	6185	47	68.58	-	102.7	43.437	-	48.366
	6345	79	70.13	-	101.4	44.609	-	48.705
UNII6	6505	111	66.69	-	106.1	43.470	-	49.539
UNII7	6665	143	69.18	-	72.46	43.154	-	48.501
UNII8	6825	175	68.13	-	73.54	43.912	-	47.357
	6985	207	69.01	-	70.54	43.361	-	47.339

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	142.5	-	-	79.459	-
	6185	47	-	142.2	-	-	80.114	-
	6345	79	-	143.6	-	-	79.829	-
UNII6	6505	111	-	140.5	-	-	79.838	-
UNII7	6665	143	-	143.6	-	-	79.856	-
UNII8	6825	175	-	143.1	-	-	79.644	-
	6985	207	-	137.1	-	-	79.348	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	25.94	29.73	26.73	25.814	28.081	23.918
	6185	47	29.25	30.88	25.41	27.783	28.817	23.136
	6345	79	27.82	28.56	26.97	26.796	30.046	25.368
UNII6	6505	111	23.78	16.96	24.89	24.466	21.062	22.255
UNII7	6665	143	27.11	28.09	28.58	25.501	30.024	25.911
UNII8	6825	175	25.51	26.61	30.34	24.929	28.702	25.598
	6985	207	25.41	19.62	28.51	25.819	24.864	30.886

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	39.07	35.19	24.10	26.539	29.006	21.422
	6185	47	36.20	35.45	29.31	28.064	29.003	23.796
	6345	79	35.08	33.96	27.55	26.575	29.303	23.640
UNII6	6505	111	28.10	32.47	31.31	24.718	29.736	24.871
UNII7	6665	143	35.37	41.04	29.44	26.353	30.619	24.939
UNII8	6825	175	27.97	35.92	31.28	25.023	29.941	24.874
	6985	207	31.80	37.83	27.05	21.402	30.455	23.387

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	38.82	37.06	35.50	25.805	27.958	23.138
	6185	47	38.29	37.60	33.88	26.983	28.187	24.465
	6345	79	38.57	36.22	35.69	25.695	27.294	24.148
UNII6	6505	111	37.82	42.63	33.91	24.949	27.982	22.408
UNII7	6665	143	35.53	37.63	34.47	25.540	27.610	24.713
UNII8	6825	175	42.88	35.90	35.19	26.542	26.457	25.314
	6985	207	36.39	42.16	36.28	25.910	29.910	24.330

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	47.12	49.09	38.25	30.553	29.051	27.559
	6185	47	48.89	49.29	39.27	32.438	27.232	27.062
	6345	79	47.94	48.53	41.27	30.394	28.508	26.776
UNII6	6505	111	48.92	49.68	41.55	30.552	26.930	26.170
UNII7	6665	143	51.03	49.98	51.96	30.933	28.127	30.990
UNII8	6825	175	50.52	49.65	44.50	31.167	29.547	27.833
	6985	207	50.87	53.30	43.98	33.369	28.475	29.333

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	94.50	-	71.04	51.475	-	49.949
	6185	47	95.95	-	73.11	52.458	-	49.366
	6345	79	94.35	-	69.86	53.950	-	48.615
UNII6	6505	111	94.83	-	73.03	50.205	-	49.255
UNII7	6665	143	93.07	-	73.08	47.063	-	49.373
UNII8	6825	175	93.00	-	72.55	47.324	-	49.226
	6985	207	85.56	-	72.55	45.410	-	50.530

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	132.2	-	-	83.225	-
	6185	47	-	140.3	-	-	81.567	-
	6345	79	-	142.6	-	-	80.100	-
UNII6	6505	111	-	131.1	-	-	80.987	-
UNII7	6665	143	-	133.7	-	-	81.052	-
UNII8	6825	175	-	131.8	-	-	81.606	-
	6985	207	-	179.6	-	-	84.751	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	171.3	-	-	157.33	-
	6185	47	-	177.2	-	-	157.21	-
	6345	79	-	175.3	-	-	157.14	-
UNII6	6505	111	-	171.8	-	-	157.27	-
UNII7	6665	143	-	173.4	-	-	157.09	-
UNII8	6825	175	-	171.2	-	-	156.94	-
	6985	207	-	313.0	-	-	158.12	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	249.3	-	-	156.97	-
	6185	47	-	228.7	-	-	156.97	-
	6345	79	-	245.3	-	-	157.15	-
UNII6	6505	111	-	230.0	-	-	157.09	-
UNII7	6665	143	-	230.0	-	-	157.02	-
UNII8	6825	175	-	229.6	-	-	156.86	-
	6985	207	-	314.6	-	-	169.64	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	168.5	37.91	34.39	162.13	39.038	38.310
	6265	63	169.8	39.81	98.59	64.707	35.851	46.093
UNII6	6425	95	26.20	133.3	105.9	43.169	53.683	48.119
	6585	127	172.3	132.2	106.7	70.376	66.113	65.081
UNII8	6745	159	30.97	36.15	106.1	49.317	37.308	45.234
	6905	191	169.7	134.6	42.66	73.773	40.153	54.772

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	30.30	47.74	111.1	34.747	38.948	70.392
	6265	63	30.53	40.11	101.0	34.539	36.333	91.348
UNII6	6425	95	36.49	43.96	108.8	32.286	38.893	73.429
	6585	127	31.53	34.35	103.6	35.641	34.104	43.623
UNII8	6745	159	35.06	37.60	102.6	33.284	37.791	100.28
	6905	191	34.74	41.35	41.24	36.513	35.145	37.884

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	172.2	138.4	106.9	47.023	91.024	39.050
	6265	63	168.5	134.2	51.47	49.224	51.871	41.402
UNII6	6425	95	170.5	138.1	111.3	77.180	45.927	39.863
	6585	127	42.64	139.3	100.7	39.043	47.464	37.531
UNII8	6745	159	169.5	133.1	44.84	38.988	77.438	36.735
	6905	191	48.32	141.5	111.4	38.988	49.307	36.631

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	168.7	163.4	129.9	119.84	144.12	109.11
	6265	63	173.4	159.8	129.0	64.280	146.95	109.40
UNII6	6425	95	174.7	166.3	129.1	97.031	147.14	111.54
	6585	127	173.6	160.3	136.4	83.763	146.96	110.10
UNII8	6745	159	172.4	165.7	126.9	76.387	149.16	110.18
	6905	191	172.9	164.5	126.4	87.168	109.72	113.11

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	177.5	-	151.0	162.76	-	126.59
	6265	63	179.1	-	152.9	162.47	-	129.52
UNII6	6425	95	178.9	-	153.8	162.92	-	127.77
	6585	127	180.8	-	150.5	163.17	-	128.64
UNII8	6745	159	179.2	-	152.2	162.32	-	127.56
	6905	191	173.0	-	153.7	161.60	-	127.05

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	170.1	-	-	98.235	-
	6265	63	-	170.4	-	-	96.513	-
UNII6	6425	95	-	173.2	-	-	96.624	-
	6585	127	-	188.9	-	-	99.558	-
UNII8	6745	159	-	189.9	-	-	95.552	-
	6905	191	-	171.3	-	-	91.610	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	95.09	54.90	40.48	90.237	46.766	44.589
	6265	63	99.01	50.88	41.53	94.588	43.044	44.463
UNII6	6425	95	96.65	55.21	37.26	94.926	45.989	41.429
	6585	127	93.27	38.77	41.45	91.400	39.749	42.449
UNII8	6745	159	33.50	52.38	35.64	43.271	39.532	46.074
	6905	191	42.51	24.61	35.35	56.619	47.708	46.964

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	48.43	35.55	47.26	42.341	34.496	46.932
	6265	63	40.13	44.76	49.35	38.309	40.872	43.233
UNII6	6425	95	35.98	49.37	46.62	38.459	39.268	43.114
	6585	127	46.74	44.28	42.18	40.900	39.153	41.846
UNII8	6745	159	37.02	42.48	47.14	36.225	37.557	42.893
	6905	191	48.58	43.91	45.09	40.818	38.739	42.785

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	99.84	60.93	47.53	45.489	51.698	37.552
	6265	63	102.9	69.68	45.11	61.410	54.905	37.997
UNII6	6425	95	96.59	63.50	42.76	67.823	51.036	35.616
	6585	127	99.47	68.94	51.93	52.720	53.257	39.646
UNII8	6745	159	95.06	67.60	46.36	55.166	52.111	36.793
	6905	191	102.5	60.88	49.88	46.693	45.031	38.926

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	106.9	84.84	62.55	91.892	69.873	39.586
	6265	63	109.5	88.95	66.73	87.809	50.966	38.779
UNII6	6425	95	109.0	90.33	69.89	89.514	71.036	42.035
	6585	127	113.4	92.05	60.63	74.815	55.683	40.471
UNII8	6745	159	110.7	92.70	64.95	67.234	69.870	37.812
	6905	191	111.1	91.26	67.41	70.324	70.611	38.639

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	126.3	-	120.3	104.27	-	87.636
	6265	63	123.2	-	149.4	100.05	-	92.554
UNII6	6425	95	124.5	-	149.2	101.39	-	85.306
	6585	127	120.4	-	120.0	99.523	-	89.255
UNII8	6745	159	127.5	-	125.2	99.491	-	86.643
	6905	191	120.1	-	118.8	100.36	-	84.117

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	168.7	-	-	101.78	-
	6265	63	-	175.9	-	-	103.24	-
UNII6	6425	95	-	164.6	-	-	101.13	-
	6585	127	-	159.5	-	-	97.512	-
UNII8	6745	159	-	147.4	-	-	99.990	-
	6905	191	-	160.0	-	-	98.434	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	39.03	37.17	40.27	40.325	45.092	49.219
	6265	63	34.55	60.26	39.48	39.447	51.442	47.224
UNII6	6425	95	38.37	33.97	34.90	43.568	42.513	40.991
	6585	127	37.37	46.50	97.03	39.460	44.525	45.466
UNII8	6745	159	37.15	63.61	39.68	40.965	54.511	60.003
	6905	191	34.95	33.86	91.05	51.793	81.275	95.793

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	31.48	52.11	95.15	39.808	41.184	72.807
	6265	63	43.86	41.04	95.62	41.444	40.987	71.731
UNII6	6425	95	41.51	51.39	90.24	39.315	44.561	89.442
	6585	127	44.16	36.32	94.82	40.448	36.336	53.816
UNII8	6745	159	38.08	49.60	95.00	36.261	41.366	91.546
	6905	191	36.92	36.15	42.82	39.526	39.700	42.796

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	55.91	70.21	94.57	40.099	45.463	39.109
	6265	63	60.74	72.39	91.12	40.609	56.276	39.457
UNII6	6425	95	54.11	65.43	92.68	39.525	45.190	40.639
	6585	127	42.82	55.92	51.99	39.038	37.545	42.560
UNII8	6745	159	51.95	77.27	48.34	40.540	62.299	39.452
	6905	191	53.60	57.18	94.89	41.017	39.315	45.704

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	77.01	68.86	108.6	45.780	47.250	90.717
	6265	63	86.37	66.84	105.7	48.218	50.645	90.489
UNII6	6425	95	67.26	67.74	101.0	45.102	49.627	91.058
	6585	127	73.78	63.47	106.8	44.511	50.414	86.790
UNII8	6745	159	75.52	69.33	106.7	42.913	48.824	91.586
	6905	191	73.29	69.18	101.3	45.467	49.072	90.819

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	99.57	-	105.1	71.407	-	90.817
	6265	63	98.38	-	106.8	72.026	-	91.019
UNII6	6425	95	102.7	-	102.3	64.474	-	91.452
	6585	127	97.23	-	106.2	70.766	-	91.205
UNII8	6745	159	99.71	-	106.3	71.210	-	89.147
	6905	191	95.84	-	106.4	72.080	-	91.770

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	178.8	-	-	92.166	-
	6265	63	-	180.4	-	-	91.987	-
UNII6	6425	95	-	184.4	-	-	90.263	-
	6585	127	-	180.8	-	-	90.130	-
UNII8	6745	159	-	138.7	-	-	93.010	-
	6905	191	-	191.5	-	-	92.666	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	31.59	145.4	170.0	39.317	59.904	85.164
	6265	63	103.9	149.6	31.98	89.230	54.928	39.779
UNII6	6425	95	103.5	152.1	28.83	88.672	51.054	43.677
	6585	127	32.13	139.2	169.6	42.694	62.903	50.464
UNII8	6745	159	107.0	146.0	169.5	100.89	78.998	64.135
	6905	191	106.0	147.5	162.5	105.22	144.13	160.92

Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	43.37	42.62	172.5	40.031	41.137	48.407
	6265	63	53.38	41.90	170.6	42.979	42.928	56.270
UNII6	6425	95	40.34	49.34	168.8	37.158	42.762	163.04
	6585	127	40.09	40.75	172.4	40.803	44.492	163.03
UNII8	6745	159	39.51	52.29	172.4	41.680	47.555	67.177
	6905	191	50.17	146.7	163.4	45.822	46.924	71.842

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	114.8	155.1	37.53	100.27	137.20	35.859
	6265	63	110.8	154.4	164.2	44.419	140.97	38.641
UNII6	6425	95	104.9	148.4	166.9	46.703	60.691	37.606
	6585	127	109.6	156.0	168.0	79.326	66.919	43.505
UNII8	6745	159	108.1	154.1	167.2	51.059	61.359	44.943
	6905	191	107.7	146.9	170.3	55.267	68.305	51.839

Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	130.4	146.1	174.4	108.82	128.72	163.32
	6265	63	129.2	142.9	177.2	81.194	127.01	163.43
UNII6	6425	95	126.2	144.5	178.5	108.86	123.20	159.88
	6585	127	128.1	144.6	179.1	108.50	81.212	164.92
UNII8	6745	159	125.4	131.8	177.5	104.74	120.07	157.73
	6905	191	125.3	136.0	178.5	107.08	124.33	162.57

Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	153.9		180.1	122.40		160.95
	6265	63	156.7		175.3	127.33		161.52
UNII6	6425	95	149.5		179.5	124.70		162.58
	6585	127	158.2		180.6	125.52		161.57
UNII8	6745	159	150.9		178.2	124.40		161.63
	6905	191	151.6		180.0	125.77		163.13

Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.6	-	-	105.84	-
	6265	63	-	173.0	-	-	103.22	-
UNII6	6425	95	-	180.7	-	-	106.29	-
	6585	127	-	172.3	-	-	101.49	-
UNII8	6745	159	-	171.6	-	-	112.83	-
	6905	191	-	186.5	-	-	144.78	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	317.7	-	-	186.28	-
	6265	63	-	266.5	-	-	192.99	-
UNII6	6425	95	-	264.7	-	-	190.78	-
	6585	127	-	324.2	-	-	217.87	-
UNII8	6745	159	-	320.9	-	-	185.83	-
	6905	191	-	320.2	-	-	169.43	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	290.1	-	-	228.12	-
	6265	63	-	292.2	-	-	225.77	-
UNII6	6425	95	-	356.2	-	-	229.86	-
	6585	127	-	288.0	-	-	226.17	-
UNII8	6745	159	-	290.9	-	-	231.75	-
	6905	191	-	356.2	-	-	232.05	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	480.7	-	-	316.12	-
	6265	63	-	630.0	-	-	316.42	-
UNII6	6425	95	-	632.8	-	-	316.41	-
	6585	127	-	629.9	-	-	316.34	-
UNII8	6745	159	-	482.9	-	-	316.15	-
	6905	191	-	622.6	-	-	316.60	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	334.0	-	-	315.31	-
	6265	63	-	334.4	-	-	315.19	-
UNII6	6425	95	-	332.8	-	-	315.39	-
	6585	127	-	332.9	-	-	315.02	-
UNII8	6745	159	-	333.0	-	-	314.83	-
	6905	191	-	332.7	-	-	313.97	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.33	-	-	17.730	-
	6175	45	-	21.39	-	-	17.726	-
	6415	93	-	20.97	-	-	17.722	-
UNII6	6435	97	-	20.95	-	-	17.739	-
	6475	105	-	21.02	-	-	17.734	-
	6515	113	-	21.01	-	-	17.719	-
UNII7	6535	117	-	21.30	-	-	17.751	-
	6695	149	-	20.94	-	-	17.730	-
	6855	181	-	20.94	-	-	17.726	-
UNII8	6875	185	-	21.33	-	-	17.721	-
	6995	209	-	20.99	-	-	17.724	-
	7115	233	-	21.14	-	-	17.727	-

10.2.1.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.34	17.95	19.57	18.074	17.113	18.028
	6175	45	19.38	18.01	19.44	18.012	16.108	17.641
	6415	93	19.35	18.05	19.52	17.918	16.959	18.249
UNII6	6435	97	19.37	17.95	19.51	18.123	16.735	18.332
	6475	105	18.92	17.27	19.62	17.642	16.029	17.683
	6515	113	19.44	18.04	19.47	18.126	16.960	18.305
UNII7	6535	117	19.27	17.98	19.65	18.085	16.944	18.240
	6695	149	19.53	17.63	19.68	18.101	16.703	18.311
	6855	181	19.39	17.94	19.29	18.279	16.962	17.679
UNII8	6875	185	19.44	18.06	18.85	18.244	16.997	17.590
	6995	209	19.63	18.03	19.60	18.282	16.786	18.128
	7115	233	19.45	17.94	18.65	18.000	16.097	17.480

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.52	18.53	19.48	18.037	16.848	18.092
	6175	45	19.56	18.19	19.54	18.157	16.703	18.167
	6415	93	19.62	18.36	19.50	18.165	17.101	18.122
UNII6	6435	97	19.63	18.19	19.52	17.673	16.317	17.803
	6475	105	19.67	18.65	19.45	18.153	16.010	18.126
	6515	113	19.49	18.10	19.64	18.126	16.183	17.454
UNII7	6535	117	19.61	17.75	19.43	18.110	16.539	18.058
	6695	149	19.69	17.57	19.41	18.192	16.777	17.984
	6855	181	19.62	18.19	19.74	18.189	16.166	18.049
UNII8	6875	185	19.79	18.15	19.73	18.229	15.346	18.040
	6995	209	19.64	18.01	19.69	18.038	16.707	17.733
	7115	233	19.76	18.50	20.01	17.955	16.932	18.236

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.60	-	20.16	18.159	-	18.205
	6175	45	19.64	-	20.25	18.174	-	18.176
	6415	93	19.63	-	20.19	18.207	-	18.197
UNII6	6435	97	19.67	-	20.22	18.210	-	18.096
	6475	105	19.56	-	20.37	18.207	-	18.177
	6515	113	19.59	-	19.75	18.177	-	18.070
UNII7	6535	117	19.56	-	20.30	18.223	-	18.139
	6695	149	19.63	-	19.78	18.207	-	18.051
	6855	181	19.56	-	20.08	18.192	-	18.153
UNII8	6875	185	19.66	-	19.88	18.229	-	18.216
	6995	209	19.63	-	19.82	18.223	-	18.093
	7115	233	19.56	-	20.23	18.008	-	18.193

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.04	-	-	19.037	-
	6175	45	-	20.86	-	-	19.024	-
	6415	93	-	21.03	-	-	19.019	-
UNII6	6435	97	-	21.07	-	-	19.040	-
	6475	105	-	20.93	-	-	19.007	-
	6515	113	-	21.02	-	-	19.029	-
UNII7	6535	117	-	21.05	-	-	19.033	-
	6695	149	-	20.94	-	-	19.029	-
	6855	181	-	20.94	-	-	19.034	-
UNII8	6875	185	-	20.94	-	-	19.047	-
	6995	209	-	21.05	-	-	19.040	-
	7115	233	-	20.97	-	-	19.038	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.32	-	-	19.003	-
	6175	45	-	21.16	-	-	19.022	-
	6415	93	-	21.52	-	-	19.018	-
UNII6	6435	97	-	21.38	-	-	19.007	-
	6475	105	-	21.55	-	-	19.031	-
	6515	113	-	21.23	-	-	19.068	-
UNII7	6535	117	-	21.42	-	-	19.014	-
	6695	149	-	21.32	-	-	19.048	-
	6855	181	-	21.63	-	-	19.058	-
UNII8	6875	185	-	21.46	-	-	18.988	-
	6995	209	-	21.46	-	-	19.035	-
	7115	233	-	21.53	-	-	19.035	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.44	20.81	20.46	18.144	19.380	18.442
	6165	43	20.41	22.00	20.49	18.348	20.338	18.582
	6405	91	19.73	22.10	20.64	18.365	19.926	18.569
UNII6	6445	99	19.83	22.25	20.40	18.341	19.986	18.409
	6485	107	19.85	21.45	19.74	18.239	20.039	18.329
	6525	115	19.84	21.08	20.01	18.306	19.119	18.529
UNII7	6565	123	19.71	22.43	19.93	18.415	20.124	18.505
	6685	147	19.68	22.26	20.82	17.442	20.136	18.595
	6845	179	20.61	21.65	19.88	18.074	19.630	18.438
UNII8	6885	187	19.96	21.84	20.28	18.374	20.001	18.493
	7005	211	19.74	21.95	20.28	18.152	20.201	18.423
	7085	227	19.85	21.06	20.44	18.193	19.743	18.248

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.83	23.57	22.53	18.147	19.594	18.417
	6165	43	20.93	22.40	25.32	18.154	19.690	18.323
	6405	91	20.71	22.38	22.61	18.059	18.149	18.363
UNII6	6445	99	20.67	22.87	25.55	18.238	19.788	18.453
	6485	107	20.79	22.73	25.40	18.181	19.823	18.401
	6525	115	20.39	22.85	22.62	18.173	19.796	18.434
UNII7	6565	123	20.95	22.53	21.39	17.313	19.770	18.426
	6685	147	20.68	22.58	22.31	18.305	19.763	18.317
	6845	179	20.64	23.35	22.69	17.243	19.471	18.375
UNII8	6885	187	20.45	23.35	25.55	18.335	19.222	18.285
	7005	211	20.31	23.15	23.99	18.097	19.656	18.258
	7085	227	20.75	22.64	24.11	18.013	19.794	17.333

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	22.01	30.73	26.03	17.992	19.264	18.065
	6165	43	21.97	23.80	26.30	17.932	19.236	18.232
	6405	91	31.06	23.81	27.54	18.037	18.780	18.171
UNII6	6445	99	21.94	30.17	27.66	17.904	19.201	18.272
	6485	107	31.24	23.48	26.43	18.018	19.318	18.165
	6525	115	31.17	29.00	26.49	18.106	19.305	18.063
UNII7	6565	123	31.14	28.63	25.11	18.044	19.187	17.836
	6685	147	22.01	30.59	26.08	17.861	18.542	18.163
	6845	179	31.24	30.74	26.40	17.992	19.350	18.088
UNII8	6885	187	29.79	29.89	26.38	17.999	19.174	18.202
	7005	211	30.99	30.21	27.81	18.087	19.298	18.251
	7085	227	31.31	30.22	27.45	18.030	19.568	18.140

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.80	-	35.79	19.381	-	19.905
	6165	43	34.76	-	35.64	19.395	-	19.853
	6405	91	34.90	-	35.87	19.338	-	19.778
UNII6	6445	99	34.83	-	35.95	19.453	-	19.887
	6485	107	34.97	-	35.99	19.414	-	19.773
	6525	115	34.97	-	36.04	19.398	-	19.828
UNII7	6565	123	34.70	-	36.35	19.407	-	19.930
	6685	147	34.70	-	35.97	19.432	-	19.764
	6845	179	34.92	-	36.19	19.449	-	20.070
UNII8	6885	187	34.92	-	36.07	19.389	-	19.686
	7005	211	35.03	-	36.36	19.428	-	19.833
	7085	227	34.57	-	36.03	19.475	-	19.601

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.69	-	-	38.005	-
	6165	43	-	41.70	-	-	37.953	-
	6405	91	-	41.74	-	-	38.003	-
UNII6	6445	99	-	42.41	-	-	38.035	-
	6485	107	-	41.36	-	-	37.980	-
	6525	115	-	41.37	-	-	37.964	-
UNII7	6565	123	-	41.59	-	-	38.012	-
	6685	147	-	41.49	-	-	37.984	-
	6845	179	-	41.38	-	-	37.953	-
UNII8	6885	187	-	41.37	-	-	37.999	-
	7005	211	-	41.41	-	-	37.961	-
	7085	227	-	41.46	-	-	37.971	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.46	-	-	37.992	-
	6165	43	-	42.57	-	-	37.986	-
	6405	91	-	42.29	-	-	37.972	-
UNII6	6445	99	-	42.28	-	-	37.954	-
	6485	107	-	42.22	-	-	37.978	-
	6525	115	-	42.19	-	-	37.957	-
UNII7	6565	123	-	41.84	-	-	37.937	-
	6685	147	-	42.14	-	-	37.942	-
	6845	179	-	42.42	-	-	37.983	-
UNII8	6885	187	-	42.53	-	-	37.951	-
	7005	211	-	41.91	-	-	38.007	-
	7085	227	-	42.68	-	-	38.005	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	14.04	26.29	25.49	13.154	21.580	21.150
	6145	39	22.02	26.28	23.18	20.173	21.909	20.451
	6385	87	24.11	22.58	24.12	19.942	21.454	20.516
UNII6	6465	103	24.05	27.08	25.22	19.885	22.081	20.150
	6545	119	22.67	28.93	25.33	19.762	23.383	20.224
UNII7	6625	135	22.79	24.12	25.67	20.026	21.156	20.294
	6705	151	22.51	26.63	23.95	19.965	22.319	20.617
	6785	167	23.65	18.71	23.51	19.691	17.545	20.532
UNII8	6865	183	23.22	25.78	25.04	19.701	21.346	20.493
	6945	199	23.86	27.97	21.60	20.177	22.666	19.160
	7025	215	21.37	25.59	26.11	18.841	21.801	20.788

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	28.70	29.47	26.64	19.967	22.419	20.443
	6145	39	27.91	26.38	26.56	20.155	21.653	20.086
	6385	87	28.24	27.22	27.48	20.458	22.211	20.380
UNII6	6465	103	26.52	31.34	27.40	19.864	20.144	20.533
	6545	119	25.88	31.83	24.11	19.918	22.766	20.213
UNII7	6625	135	26.83	31.42	28.46	19.333	22.707	21.165
	6705	151	28.74	30.82	28.13	19.809	22.192	20.292
	6785	167	26.20	31.89	28.17	19.878	22.851	20.220
UNII8	6865	183	29.56	32.11	27.81	20.096	22.744	20.471
	6945	199	27.96	33.31	27.29	19.809	22.733	20.398
	7025	215	25.93	29.67	27.16	19.854	22.012	20.227

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	26.91	34.48	30.92	19.120	21.476	21.210
	6145	39	28.04	34.28	30.29	19.661	21.260	20.737
	6385	87	28.62	35.42	26.75	19.388	22.172	19.751
UNII6	6465	103	29.36	32.12	28.60	19.001	22.366	20.112
	6545	119	29.67	33.21	27.83	19.496	21.629	19.631
UNII7	6625	135	28.13	35.19	30.14	20.000	22.112	19.759
	6705	151	28.64	34.00	28.00	19.175	20.009	19.698
	6785	167	28.99	34.32	29.33	19.334	20.940	19.878
UNII8	6865	183	29.24	32.11	30.34	19.654	20.653	20.364
	6945	199	30.01	34.04	27.48	19.610	21.436	19.932
	7025	215	28.72	33.81	29.31	19.737	20.860	20.390

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	30.90	35.31	32.12	22.286	23.043	21.903
	6145	39	31.68	34.81	31.82	21.966	22.407	22.441
	6385	87	44.53	35.05	32.77	22.669	22.455	22.759
UNII6	6465	103	32.36	34.33	32.21	21.821	23.174	21.695
	6545	119	33.53	35.42	32.90	22.159	23.650	22.642
UNII7	6625	135	32.63	35.22	35.19	22.743	22.078	22.955
	6705	151	33.08	35.39	31.75	22.414	22.364	22.314
	6785	167	44.07	34.95	43.46	22.623	22.742	22.427
UNII8	6865	183	32.16	34.86	33.35	22.131	22.988	22.614
	6945	199	32.09	35.44	32.39	22.333	22.717	22.923
	7025	215	33.88	36.38	32.24	22.782	23.232	22.376

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	68.87	-	70.88	54.253	-	43.574
	6145	39	68.90	-	71.92	53.833	-	43.657
	6385	87	67.60	-	71.16	53.110	-	42.514
UNII6	6465	103	69.15	-	70.82	52.368	-	43.092
	6545	119	68.24	-	71.29	52.568	-	43.302
UNII7	6625	135	69.38	-	71.33	53.597	-	42.173
	6705	151	69.19	-	69.29	53.001	-	42.336
	6785	167	69.24	-	71.25	54.547	-	42.678
UNII8	6865	183	69.42	-	71.63	54.606	-	42.821
	6945	199	69.71	-	71.66	54.497	-	43.249
	7025	215	69.34	-	70.90	54.900	-	42.905

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.34	-	-	77.683	-
	6145	39	-	87.03	-	-	77.706	-
	6385	87	-	87.45	-	-	77.661	-
UNII6	6465	103	-	87.07	-	-	77.685	-
	6545	119	-	87.62	-	-	77.708	-
UNII7	6625	135	-	86.99	-	-	77.684	-
	6705	151	-	86.62	-	-	77.701	-
	6785	167	-	87.48	-	-	77.692	-
UNII8	6865	183	-	86.90	-	-	77.674	-
	6945	199	-	86.86	-	-	77.680	-
	7025	215	-	86.79	-	-	77.668	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.65	-	-	77.806	-
	6145	39	-	88.03	-	-	77.670	-
	6385	87	-	86.49	-	-	77.798	-
UNII6	6465	103	-	86.78	-	-	77.672	-
	6545	119	-	87.18	-	-	77.897	-
UNII7	6625	135	-	86.85	-	-	77.723	-
	6705	151	-	86.29	-	-	77.908	-
	6785	167	-	86.83	-	-	77.768	-
UNII8	6865	183	-	87.37	-	-	77.711	-
	6945	199	-	87.71	-	-	77.696	-
	7025	215	-	87.05	-	-	77.694	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	27.68	25.91	32.12	23.813	24.267	26.498
	6185	47	20.10	24.43	27.56	18.943	23.150	26.134
	6345	79	25.76	26.39	26.70	21.543	24.352	24.842
UNII6	6505	111	29.36	26.77	31.84	22.604	24.792	27.288
UNII7	6665	143	29.02	27.22	29.10	22.439	24.956	24.407
UNII8	6825	175	25.28	24.88	24.31	23.775	22.924	24.565
	6985	207	24.26	31.08	29.71	21.514	26.076	25.945

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.55	31.71	29.77	24.213	26.206	26.083
	6185	47	28.51	33.49	32.71	22.805	25.780	25.940
	6345	79	29.24	34.61	30.04	21.519	25.092	27.121
UNII6	6505	111	29.71	34.70	32.27	22.853	24.024	27.624
UNII7	6665	143	27.51	34.46	36.28	22.543	25.779	27.379
UNII8	6825	175	28.16	31.81	30.45	22.614	24.601	27.367
	6985	207	28.06	33.85	34.62	21.782	26.840	27.519

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	30.34	32.90	37.01	24.458	24.522	25.381
	6185	47	39.83	38.02	37.96	23.958	24.360	24.374
	6345	79	33.03	41.25	35.77	23.607	24.749	24.796
UNII6	6505	111	36.59	39.52	40.07	23.138	24.960	24.844
UNII7	6665	143	29.82	39.12	36.18	23.721	25.312	25.259
UNII8	6825	175	35.58	39.75	36.98	25.932	26.443	24.715
	6985	207	31.73	36.30	34.44	24.484	25.903	25.510

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.80	44.88	45.00	29.733	26.190	26.791
	6185	47	47.58	45.35	46.16	30.539	28.148	27.068
	6345	79	37.21	45.38	43.01	28.119	27.541	27.620
UNII6	6505	111	44.65	46.21	47.71	28.988	28.810	27.510
UNII7	6665	143	87.77	44.37	43.21	28.983	27.759	26.135
UNII8	6825	175	88.60	72.57	44.56	30.341	29.215	26.623
	6985	207	43.19	45.37	43.86	28.241	27.912	26.390

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.87	-	73.67	42.811	-	47.402
	6185	47	87.63	-	105.2	43.743	-	48.048
	6345	79	87.30	-	104.1	44.591	-	48.929
UNII6	6505	111	87.07	-	72.13	43.682	-	49.330
UNII7	6665	143	87.97	-	107.6	46.087	-	50.083
UNII8	6825	175	70.36	-	109.2	45.555	-	48.102
	6985	207	87.83	-	107.1	44.481	-	47.375

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	140.3	-	-	79.661	-
	6185	47	-	144.3	-	-	80.361	-
	6345	79	-	141.1	-	-	80.035	-
UNII6	6505	111	-	139.0	-	-	79.775	-
UNII7	6665	143	-	143.5	-	-	79.892	-
UNII8	6825	175	-	141.1	-	-	80.575	-
	6985	207	-	141.9	-	-	79.882	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	27.28	31.19	26.24	25.238	28.351	23.320
	6185	47	21.40	25.97	27.23	20.976	28.338	21.991
	6345	79	27.48	32.36	26.96	25.634	29.843	24.091
UNII6	6505	111	28.85	29.10	24.72	27.576	28.097	22.690
UNII7	6665	143	24.98	28.43	24.90	25.120	27.129	22.949
UNII8	6825	175	26.46	26.21	24.13	25.534	27.144	22.248
	6985	207	17.23	27.97	28.41	19.529	27.838	23.959

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	36.41	40.39	29.24	28.167	29.277	23.489
	6185	47	30.27	29.22	26.94	25.081	27.612	23.425
	6345	79	31.12	37.53	26.39	26.796	29.587	23.911
UNII6	6505	111	32.47	37.60	27.25	26.522	29.554	24.099
UNII7	6665	143	30.45	33.88	26.76	25.997	28.341	23.160
UNII8	6825	175	32.32	21.96	29.46	26.800	20.964	23.404
	6985	207	30.47	31.33	29.71	25.149	25.543	23.003

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	34.42	42.55	33.78	26.587	28.942	24.735
	6185	47	36.00	39.80	30.86	25.883	27.213	21.640
	6345	79	38.31	37.11	34.42	27.135	27.279	24.667
UNII6	6505	111	36.64	38.62	29.60	26.873	27.713	24.985
UNII7	6665	143	37.28	30.58	34.61	26.008	25.308	23.782
UNII8	6825	175	38.78	42.72	31.17	26.776	26.484	22.350
	6985	207	35.92	39.25	32.37	25.350	28.005	24.216

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	47.28	50.96	85.62	31.507	29.566	27.653
	6185	47	50.30	49.83	41.73	31.882	28.016	26.275
	6345	79	48.06	49.16	43.02	32.200	29.428	27.533
UNII6	6505	111	48.83	46.99	41.32	29.671	27.931	25.946
UNII7	6665	143	51.63	47.04	48.26	29.626	27.003	30.037
UNII8	6825	175	49.07	48.45	85.95	28.988	27.825	28.080
	6985	207	52.56	49.74	42.75	33.729	27.940	28.109

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	96.41	-	87.73	54.055	-	50.340
	6185	47	97.31	-	87.21	53.566	-	50.607
	6345	79	97.28	-	86.55	53.783	-	50.049
UNII6	6505	111	96.68	-	87.56	53.582	-	50.089
UNII7	6665	143	98.47	-	87.60	54.036	-	48.032
UNII8	6825	175	95.46	-	88.17	53.277	-	47.890
	6985	207	95.74	-	86.83	55.730	-	48.942

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	128.9	-	-	81.209	-
	6185	47	-	130.5	-	-	80.096	-
	6345	79	-	130.4	-	-	80.503	-
UNII6	6505	111	-	131.3	-	-	80.080	-
UNII7	6665	143	-	127.4	-	-	79.654	-
UNII8	6825	175	-	126.0	-	-	79.422	-
	6985	207	-	131.7	-	-	79.856	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	172.9	-	-	156.95	-
	6185	47	-	172.3	-	-	157.37	-
	6345	79	-	175.7	-	-	157.10	-
UNII6	6505	111	-	172.3	-	-	157.08	-
UNII7	6665	143	-	176.2	-	-	157.20	-
UNII8	6825	175	-	173.5	-	-	157.01	-
	6985	207	-	175.3	-	-	157.35	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	220.5	-	-	156.67	-
	6185	47	-	175.2	-	-	156.68	-
	6345	79	-	173.7	-	-	156.73	-
UNII6	6505	111	-	175.6	-	-	156.64	-
UNII7	6665	143	-	175.3	-	-	156.67	-
UNII8	6825	175	-	176.8	-	-	156.65	-
	6985	207	-	177.4	-	-	156.69	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	167.8	39.56	101.0	163.75	38.722	43.474
	6265	63	170.0	131.8	33.90	60.225	38.516	38.446
UNII6	6425	95	172.2	30.75	42.47	164.21	30.988	41.234
	6585	127	170.8	127.4	100.7	161.81	36.111	57.236
UNII8	6745	159	172.1	32.32	100.4	71.993	37.977	42.750
	6905	191	163.1	134.7	38.65	160.33	35.044	38.853

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	31.49	50.53	106.2	30.556	41.384	63.236
	6265	63	33.98	47.79	108.7	38.639	35.984	59.625
UNII6	6425	95	33.99	50.07	103.6	36.535	39.564	57.610
	6585	127	39.99	34.37	106.6	35.620	34.949	100.83
UNII8	6745	159	32.27	45.28	104.0	40.038	40.629	101.80
	6905	191	37.02	39.44	106.9	39.378	38.505	95.872

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	170.7	48.86	111.2	55.069	40.111	39.192
	6265	63	168.6	139.1	110.7	46.089	46.351	40.385
UNII6	6425	95	170.3	145.4	113.4	49.334	61.639	37.847
	6585	127	173.1	142.2	52.65	38.240	128.85	41.178
UNII8	6745	159	172.0	142.6	109.0	72.786	124.80	44.183
	6905	191	172.8	131.1	111.4	158.59	43.159	42.535

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	174.2	162.3	130.6	71.472	146.80	109.80
	6265	63	172.2	163.3	128.1	95.482	146.76	106.71
UNII6	6425	95	164.5	164.0	120.7	49.618	148.26	111.16
	6585	127	173.6	163.9	134.6	83.995	149.08	109.88
UNII8	6745	159	168.2	165.7	136.5	159.64	147.02	109.27
	6905	191	173.0	164.0	128.6	162.53	145.81	105.80

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	175.4	-	149.8	162.47	-	128.62
	6265	63	179.1	-	150.0	162.51	-	126.91
UNII6	6425	95	179.3	-	149.5	163.46	-	127.09
	6585	127	176.3	-	151.0	162.95	-	125.55
UNII8	6745	159	178.7	-	154.9	163.07	-	126.81
	6905	191	180.1	-	154.5	161.28	-	128.04

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.8	-	-	90.003	-
	6265	63	-	170.6	-	-	97.111	-
UNII6	6425	95	-	171.3	-	-	101.48	-
	6585	127	-	171.7	-	-	104.56	-
UNII8	6745	159	-	171.1	-	-	108.01	-
	6905	191	-	172.6	-	-	119.81	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	94.58	53.53	41.46	91.946	38.224	41.962
	6265	63	99.19	48.04	37.53	91.898	36.963	39.174
UNII6	6425	95	85.88	41.37	41.99	38.732	38.163	37.435
	6585	127	89.85	52.67	37.49	64.926	39.611	40.260
UNII8	6745	159	90.65	36.66	40.96	90.144	38.733	39.165
	6905	191	32.74	55.54	39.64	38.163	46.938	37.292

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	44.56	45.67	42.70	38.202	39.886	41.788
	6265	63	52.26	42.29	45.21	45.639	41.257	42.527
UNII6	6425	95	50.34	40.96	41.98	41.465	37.159	42.849
	6585	127	44.95	36.87	41.35	38.677	39.612	39.802
UNII8	6745	159	40.21	49.50	47.59	42.006	41.557	45.200
	6905	191	44.77	37.94	44.69	40.088	39.719	42.370

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	97.27	60.55	42.70	42.229	51.683	35.810
	6265	63	103.8	59.10	46.26	51.350	46.459	38.468
UNII6	6425	95	103.4	61.74	44.04	40.103	52.976	36.941
	6585	127	55.03	66.00	47.07	40.215	57.236	41.819
UNII8	6745	159	100.6	62.28	47.67	82.407	52.308	38.569
	6905	191	104.6	67.62	43.77	43.522	41.098	37.183

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.6	87.69	61.88	91.234	69.232	40.336
	6265	63	109.6	89.62	64.48	85.400	68.480	42.413
UNII6	6425	95	109.3	88.97	64.36	85.926	55.401	40.977
	6585	127	113.2	90.36	68.34	75.555	46.798	39.619
UNII8	6745	159	107.5	88.96	67.54	89.423	71.058	38.691
	6905	191	111.3	79.71	56.24	88.906	69.965	38.636

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	127.0		151.9	101.81		91.814
	6265	63	120.8		150.4	99.012		88.784
UNII6	6425	95	128.6		155.0	100.42		92.602
	6585	127	123.7		148.6	96.672		92.548
UNII8	6745	159	127.7		156.7	98.654		82.982
	6905	191	123.4		147.3	95.488		84.496

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	172.8	-	-	101.80	-
	6265	63	-	178.4	-	-	103.31	-
UNII6	6425	95	-	170.9	-	-	100.12	-
	6585	127	-	176.4	-	-	102.68	-
UNII8	6745	159	-	168.7	-	-	102.77	-
	6905	191	-	170.6	-	-	102.71	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	35.41	65.31	93.96	37.377	40.113	43.533
	6265	63	42.98	63.70	92.68	39.241	45.054	46.316
UNII6	6425	95	36.14	61.72	98.11	37.367	51.149	94.453
	6585	127	42.50	47.85	97.62	38.321	42.130	51.388
UNII8	6745	159	39.69	61.57	42.31	40.669	43.215	42.437
	6905	191	31.22	63.72	34.56	35.886	46.268	47.625

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	37.66	50.86	95.21	37.463	46.690	50.615
	6265	63	41.40	49.63	96.87	38.417	42.756	57.025
UNII6	6425	95	49.37	49.85	97.39	37.797	39.298	46.986
	6585	127	41.73	38.68	39.36	41.959	43.444	39.852
UNII8	6745	159	44.17	49.07	97.56	41.202	41.965	96.626
	6905	191	43.33	37.29	91.54	40.147	35.502	43.966

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	54.84	75.34	93.13	41.495	41.710	42.322
	6265	63	53.08	73.58	94.64	41.316	63.945	44.321
UNII6	6425	95	51.50	74.20	98.51	37.276	47.948	41.892
	6585	127	53.13	75.35	97.37	41.424	43.284	43.303
UNII8	6745	159	46.46	76.11	92.78	40.926	63.581	37.959
	6905	191	51.56	73.57	101.0	37.927	64.137	48.491

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	76.92	67.58	109.6	46.865	51.275	89.228
	6265	63	79.17	64.89	103.3	49.308	49.189	91.418
UNII6	6425	95	75.66	67.64	108.2	45.314	50.650	91.737
	6585	127	71.87	67.13	106.4	46.841	49.482	86.522
UNII8	6745	159	71.89	66.94	103.7	45.842	50.046	92.076
	6905	191	79.51	65.31	101.2	46.114	49.721	88.899

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	102.5	-	104.6	70.710	-	93.064
	6265	63	98.36	-	106.2	72.724	-	91.741
UNII6	6425	95	101.8	-	105.4	71.516	-	89.364
	6585	127	100.1	-	107.1	72.438	-	90.127
UNII8	6745	159	100.3	-	112.0	72.442	-	91.887
	6905	191	100.1	-	108.0	73.682	-	92.370

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	161.9	-	-	93.691	-
	6265	63	-	182.6	-	-	95.297	-
UNII6	6425	95	-	180.7	-	-	92.523	-
	6585	127	-	176.2	-	-	94.204	-
UNII8	6745	159	-	163.7	-	-	90.723	-
	6905	191	-	181.0	-	-	93.600	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	27.56	35.28	170.4	45.895	38.371	68.983
	6265	63	34.04	139.0	28.73	37.907	52.707	48.730
UNII6	6425	95	36.73	147.4	167.8	39.774	71.233	67.941
	6585	127	102.7	143.5	31.04	99.191	46.890	38.081
UNII8	6745	159	107.6	145.1	35.35	98.394	54.730	39.100
	6905	191	108.4	142.6	169.9	97.260	48.791	71.273

Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	33.10	37.82	173.9	38.498	42.600	158.20
	6265	63	40.68	52.37	36.72	43.204	45.842	43.816
UNII6	6425	95	49.63	50.65	171.9	43.253	44.508	164.90
	6585	127	47.81	36.23	165.9	43.173	42.760	65.944
UNII8	6745	159	56.79	51.51	167.4	40.440	46.405	76.574
	6905	191	39.73	36.36	161.3	41.173	41.117	46.047

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	112.0	154.2	166.9	55.194	50.629	40.545
	6265	63	116.3	151.0	167.4	49.859	143.29	44.571
UNII6	6425	95	107.5	148.0	163.5	43.355	62.475	38.052
	6585	127	55.45	158.6	166.6	41.751	140.78	35.464
UNII8	6745	159	110.7	155.4	37.43	43.952	51.693	34.228
	6905	191	115.6	154.9	168.2	56.127	132.68	41.677

Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	123.1	143.5	177.7	107.21	125.15	158.25
	6265	63	124.1	142.1	178.3	108.61	125.08	161.60
UNII6	6425	95	119.2	147.0	176.1	48.729	125.50	162.32
	6585	127	130.0	144.0	175.3	105.16	123.94	164.43
UNII8	6745	159	128.1	135.0	172.3	108.79	64.406	163.95
	6905	191	122.4	140.9	175.8	105.71	123.76	160.27

Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	154.4	-	178.3	122.96	-	163.86
	6265	63	156.9	-	178.5	127.15	-	163.02
UNII6	6425	95	150.4	-	176.2	124.25	-	163.19
	6585	127	157.6	-	175.3	126.64	-	159.28
UNII8	6745	159	153.3	-	175.7	122.84	-	162.58
	6905	191	155.1	-	175.5	126.04	-	161.18

Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	172.3	-	-	103.76	-
	6265	63	-	172.8	-	-	107.88	-
UNII6	6425	95	-	171.4	-	-	105.28	-
	6585	127	-	171.7	-	-	101.51	-
UNII8	6745	159	-	173.0	-	-	99.492	-
	6905	191	-	170.4	-	-	98.439	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	264.1	-	-	184.75	-
	6265	63	-	268.9	-	-	214.19	-
UNII6	6425	95	-	264.9	-	-	185.89	-
	6585	127	-	268.8	-	-	218.56	-
UNII8	6745	159	-	268.6	-	-	212.89	-
	6905	191	-	268.4	-	-	218.98	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	290.9	-	-	231.04	-
	6265	63	-	290.5	-	-	212.38	-
UNII6	6425	95	-	289.9	-	-	227.89	-
	6585	127	-	291.3	-	-	223.91	-
UNII8	6745	159	-	288.9	-	-	209.38	-
	6905	191	-	287.8	-	-	225.62	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	333.9	-	-	315.93	-
	6265	63	-	333.3	-	-	315.81	-
UNII6	6425	95	-	334.4	-	-	314.88	-
	6585	127	-	334.0	-	-	315.70	-
UNII8	6745	159	-	334.7	-	-	315.43	-
	6905	191	-	334.3	-	-	315.60	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	332.8	-	-	315.15	-
	6265	63	-	333.6	-	-	314.95	-
UNII6	6425	95	-	331.2	-	-	315.20	-
	6585	127	-	335.7	-	-	315.19	-
UNII8	6745	159	-	334.1	-	-	314.95	-
	6905	191	-	332.0	-	-	314.69	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.17	-	-	17.709	-
	6175	45	-	21.24	-	-	17.737	-
	6415	93	-	20.99	-	-	17.738	-
UNII6	6435	97	-	20.97	-	-	17.729	-
	6475	105	-	21.27	-	-	17.739	-
	6515	113	-	21.31	-	-	17.735	-
UNII7	6535	117	-	20.95	-	-	17.738	-
	6695	149	-	21.04	-	-	17.721	-
	6855	181	-	20.98	-	-	17.739	-
UNII8	6875	185	-	20.89	-	-	17.733	-
	6995	209	-	20.94	-	-	17.726	-
	7115	233	-	21.02	-	-	17.732	-

10.2.2 26 dB BANDWIDTH(Standard client)

10.2.2.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.26	18.16	19.44	17.926	16.360	18.114
	6175	45	19.20	17.33	19.45	17.787	16.314	18.143
	6415	93	19.49	17.80	19.41	18.338	16.488	18.256
UNII7	6535	117	19.42	17.96	19.59	16.903	16.670	18.225
	6695	149	19.41	17.95	19.44	18.230	16.956	17.735
	6855	181	18.92	17.03	19.15	17.665	15.883	17.836

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.64	18.21	19.49	17.951	16.932	17.886
	6175	45	19.67	18.34	18.84	18.166	16.774	17.375
	6415	93	19.62	18.65	19.62	18.169	17.192	17.970
UNII7	6535	117	19.67	18.49	20.10	18.211	16.850	18.211
	6695	149	19.55	17.80	19.65	18.181	16.522	18.127
	6855	181	19.68	18.27	19.59	17.901	16.733	17.805

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.44	-	20.25	18.127	-	18.169
	6175	45	19.64	-	20.17	18.137	-	18.022
	6415	93	19.48	-	20.15	18.246	-	18.175
UNII7	6535	117	19.54	-	20.22	18.161	-	18.121
	6695	149	19.48	-	20.09	18.140	-	18.195
	6855	181	19.61	-	19.75	18.213	-	18.224

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.00	-	-	19.031	-
	6175	45	-	20.83	-	-	19.023	-
	6415	93	-	20.96	-	-	19.040	-
UNII7	6535	117	-	21.04	-	-	19.042	-
	6695	149	-	20.99	-	-	19.039	-
	6855	181	-	20.98	-	-	19.058	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.42	-	-	19.016	-
	6175	45	-	21.15	-	-	19.030	-
	6415	93	-	21.19	-	-	19.047	-
UNII7	6535	117	-	21.17	-	-	18.994	-
	6695	149	-	21.45	-	-	19.040	-
	6855	181	-	21.81	-	-	19.042	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	19.32	22.21	19.96	17.825	19.960	18.516
	6165	43	19.78	21.86	19.88	17.543	19.949	17.749
	6405	91	20.28	21.51	20.07	18.409	19.920	18.427
UNII7	6565	123	20.08	21.97	20.24	18.450	19.655	17.962
	6685	147	19.76	21.94	21.23	18.331	20.044	18.547
	6845	179	20.35	21.39	20.84	18.381	19.848	17.763

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.67	23.02	25.41	18.115	19.456	17.614
	6165	43	20.41	22.70	22.55	18.083	19.264	18.308
	6405	91	19.97	23.65	24.29	17.251	19.901	18.275
UNII7	6565	123	20.97	23.00	21.75	18.106	19.889	18.408
	6685	147	20.69	23.25	23.87	18.100	19.821	18.060
	6845	179	20.69	22.59	25.38	18.250	19.631	18.504

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	21.64	30.51	26.05	17.948	19.218	18.312
	6165	43	31.45	29.91	27.65	18.091	19.181	18.270
	6405	91	21.59	30.59	25.09	17.872	19.434	18.170
UNII7	6565	123	31.22	23.73	26.41	17.999	19.209	18.439
	6685	147	21.55	30.53	27.57	18.099	19.581	18.144
	6845	179	22.14	23.66	26.41	18.113	19.218	18.272

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.83	-	36.08	19.410	-	19.960
	6165	43	34.83	-	35.71	19.464	-	19.950
	6405	91	34.65	-	35.75	19.468	-	19.726
UNII7	6565	123	34.86	-	35.86	19.481	-	19.961
	6685	147	34.98	-	36.01	19.470	-	20.100
	6845	179	34.88	-	35.78	19.427	-	20.320

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.47	-	-	37.974	-
	6165	43	-	41.42	-	-	37.980	-
	6405	91	-	41.42	-	-	37.959	-
UNII7	6565	123	-	41.53	-	-	38.006	-
	6685	147	-	41.46	-	-	38.004	-
	6845	179	-	41.58	-	-	38.024	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.49	-	-	37.933	-
	6165	43	-	42.47	-	-	37.947	-
	6405	91	-	42.25	-	-	37.970	-
UNII7	6565	123	-	42.12	-	-	37.988	-
	6685	147	-	42.49	-	-	38.015	-
	6845	179	-	42.10	-	-	37.985	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	22.94	23.48	24.48	20.060	21.547	20.288
	6145	39	21.35	22.33	21.74	19.497	21.122	19.745
	6385	87	23.71	25.49	23.21	19.675	21.132	19.899
UNII7	6625	135	20.51	22.55	22.19	18.972	22.028	19.861
	6705	151	23.03	24.70	25.76	20.452	21.953	20.247
	6785	167	23.58	25.89	22.40	20.096	22.077	19.650

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	27.65	31.00	29.83	20.166	22.676	19.888
	6145	39	26.39	32.25	28.50	19.888	22.290	20.324
	6385	87	26.56	30.29	28.64	19.008	22.712	20.371
UNII7	6625	135	27.33	34.60	28.98	19.339	22.358	20.870
	6705	151	19.40	33.80	26.08	16.924	23.352	20.219
	6785	167	26.61	34.59	26.45	19.752	22.837	19.950

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.87	32.28	28.31	19.211	20.859	19.412
	6145	39	29.51	32.67	29.36	19.139	20.891	20.682
	6385	87	28.53	33.04	27.72	19.073	20.482	20.069
UNII7	6625	135	29.16	34.52	28.14	19.838	21.841	20.800
	6705	151	28.85	33.37	28.83	18.761	22.032	19.669
	6785	167	29.33	34.44	29.33	19.606	22.310	20.430

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	32.51	32.69	31.66	22.102	22.302	22.495
	6145	39	32.99	34.03	31.79	22.044	22.806	22.506
	6385	87	33.88	34.75	31.97	22.782	22.668	23.030
UNII7	6625	135	32.27	33.57	33.58	22.166	22.942	22.883
	6705	151	34.93	34.60	33.21	22.230	22.780	22.772
	6785	167	33.17	34.69	31.87	22.299	22.164	21.671

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.49	-	73.01	54.050	-	43.838
	6145	39	69.00	-	72.85	53.409	-	43.595
	6385	87	69.77	-	71.10	53.434	-	42.544
UNII7	6625	135	69.25	-	73.09	53.881	-	43.591
	6705	151	69.23	-	72.73	53.530	-	44.501
	6785	167	69.07	-	72.16	53.431	-	44.274

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	89.16	-	-	77.825	-
	6145	39	-	88.09	-	-	77.865	-
	6385	87	-	88.43	-	-	77.921	-
UNII7	6625	135	-	88.53	-	-	77.861	-
	6705	151	-	88.31	-	-	77.896	-
	6785	167	-	88.50	-	-	77.805	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.28	-	-	77.728	-
	6145	39	-	88.35	-	-	77.718	-
	6385	87	-	87.16	-	-	77.731	-
UNII7	6625	135	-	88.07	-	-	77.912	-
	6705	151	-	87.13	-	-	77.738	-
	6785	167	-	87.63	-	-	77.820	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	24.23	24.78	25.92	21.365	20.683	26.513
	6185	47	26.06	28.97	28.55	21.894	25.334	25.130
	6345	79	23.43	24.46	28.60	21.622	23.369	25.808
UNII7	6665	143	27.73	25.64	28.03	22.536	24.724	25.729

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	29.97	29.66	35.98	22.234	26.940	26.406
	6185	47	28.90	35.03	31.36	22.286	25.978	27.375
	6345	79	25.23	33.32	31.26	21.361	24.446	26.489
UNII7	6665	143	30.59	29.04	31.39	22.036	21.594	29.031

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	27.77	37.98	39.48	21.972	24.973	25.033
	6185	47	40.37	41.67	37.58	24.064	25.066	24.032
	6345	79	35.06	37.39	37.66	23.425	24.284	26.052
UNII7	6665	143	36.88	41.98	33.22	21.887	25.114	25.415

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	42.24	42.35	40.82	27.374	25.871	25.249
	6185	47	41.08	41.19	44.53	27.153	25.327	26.851
	6345	79	42.74	41.11	42.78	27.505	25.958	24.866
UNII7	6665	143	42.66	42.90	46.09	28.259	25.143	24.988

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	66.23	-	68.90	43.839	-	47.579
	6185	47	64.86	-	69.01	43.904	-	46.991
	6345	79	67.70	-	71.44	44.505	-	45.889
UNII7	6665	143	65.57	-	66.64	46.467	-	46.228

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	142.8	-	-	79.232	-
	6185	47	-	143.7	-	-	79.652	-
	6345	79	-	144.4	-	-	80.025	-
UNII7	6665	143	-	144.5	-	-	79.799	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	27.03	18.29	25.06	24.866	19.493	22.595
	6185	47	26.47	27.95	25.13	25.954	26.910	22.489
	6345	79	31.48	28.01	28.04	25.018	27.375	24.258
UNII7	6665	143	26.96	28.12	29.05	24.805	26.033	24.499

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	31.08	33.95	27.82	26.275	29.177	23.290
	6185	47	36.67	37.74	26.57	26.110	28.917	22.369
	6345	79	32.33	35.00	25.22	25.504	27.054	24.740
UNII7	6665	143	35.17	34.35	31.32	27.128	29.235	25.192

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	40.08	41.11	32.43	26.237	27.211	23.383
	6185	47	36.52	38.45	30.30	27.030	27.626	22.634
	6345	79	37.03	31.76	32.42	25.342	27.068	22.651
UNII7	6665	143	37.10	32.12	34.13	25.737	27.422	24.777

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	53.98	50.78	48.05	30.457	26.235	29.108
	6185	47	54.41	52.64	44.83	31.769	28.252	26.623
	6345	79	50.44	51.69	43.21	27.105	26.745	28.581
UNII7	6665	143	50.39	52.55	43.81	28.915	26.930	27.954

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	84.78	-	67.78	46.621	-	49.368
	6185	47	85.67	-	71.50	44.874	-	48.947
	6345	79	78.67	-	65.90	45.735	-	48.040
UNII7	6665	143	85.56	-	70.44	45.451	-	48.167

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	145.2	-	-	81.548	-
	6185	47	-	144.1	-	-	82.348	-
	6345	79	-	145.4	-	-	80.598	-
UNII7	6665	143	-	132.0	-	-	79.899	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	173.7	-	-	156.96	-
	6185	47	-	173.8	-	-	156.94	-
	6345	79	-	171.2	-	-	157.12	-
UNII7	6665	143	-	177.0	-	-	157.22	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	247.9	-	-	157.16	-
	6185	47	-	245.8	-	-	156.92	-
	6345	79	-	302.9	-	-	157.22	-
UNII7	6665	143	-	309.8	-	-	157.19	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	35.59	32.76	107.6	29.044	31.229	42.838
	6265	63	171.6	36.87	31.97	69.559	34.944	38.173

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	30.27	38.75	110.2	28.878	34.706	102.22
	6265	63	36.23	44.97	106.9	32.858	33.377	48.696

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	171.0	142.4	48.01	36.573	43.535	36.399
	6265	63	165.5	139.0	111.6	38.204	100.13	37.009

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	173.4	164.6	132.1	76.130	113.19	110.87
	6265	63	174.0	163.9	129.8	91.017	147.49	111.48

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	187.7	-	151.7	162.52	-	128.45
	6265	63	179.8	-	156.7	163.05	-	128.98

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	186.7	-	-	90.443	-
	6265	63	-	190.8	-	-	89.641	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	97.82	54.58	35.01	35.992	35.890	34.226
	6265	63	98.05	42.83	40.95	51.181	36.666	39.081

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	32.43	39.61	43.70	37.386	38.856	40.268
	6265	63	48.20	42.59	35.24	36.599	38.023	36.194

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	103.0	68.28	45.20	43.546	42.842	35.261
	6265	63	105.8	60.49	47.17	48.583	42.637	36.217

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	111.3	86.01	64.93	61.887	67.647	38.431
	6265	63	111.4	91.30	69.90	77.576	64.855	44.777

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	121.5	-	114.5	96.900	-	65.365
	6265	63	123.6	-	115.0	93.156	-	65.686

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	149.3	-	-	100.72	-
	6265	63	-	161.4	-	-	99.668	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	35.78	60.10	94.61	35.497	37.986	39.234
	6265	63	37.32	61.20	94.51	34.617	37.415	46.068

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	46.63	42.19	95.34	40.048	39.697	89.225
	6265	63	41.79	44.01	41.62	38.622	40.320	40.729

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	55.45	71.26	52.19	43.243	63.015	41.453
	6265	63	55.40	73.20	95.81	40.004	52.436	39.837

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	74.38	73.04	106.4	46.427	51.035	90.390
	6265	63	70.47	68.68	104.4	44.392	50.845	89.913

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	93.18	-	105.8	64.915	-	87.548
	6265	63	92.01	-	106.0	65.674	-	92.057

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	182.4	-	-	91.808	-
	6265	63	-	184.8	-	-	92.855	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	108.9	145.7	169.9	39.033	51.641	47.025
	6265	63	110.1	149.0	168.5	52.431	42.517	43.223

Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	51.36	47.39	170.4	41.293	45.748	78.714
	6265	63	48.33	35.21	163.8	36.814	38.838	45.240

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	111.3	156.0	46.38	96.983	136.47	35.998
	6265	63	114.6	153.0	41.20	64.525	80.579	36.477

Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	129.2	140.5	176.1	61.296	124.48	164.10
	6265	63	128.1	141.5	173.8	87.400	119.38	135.26

Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	152.1	-	178.3	124.69	-	162.27
	6265	63	152.7	-	172.7	123.96	-	162.08

Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.9	-	-	110.41	-
	6265	63	-	185.4	-	-	96.984	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	317.9	-	-	195.49	-
	6265	63	-	317.5	-	-	188.26	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	288.7	-	-	225.44	-
	6265	63	-	290.1	-	-	228.69	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	479.0	-	-	315.76	-
	6265	63	-	477.4	-	-	315.94	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	334.9	-	-	315.16	-
	6265	63	-	333.8	-	-	315.41	-

802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.77	-	-	16.553	-
	6175	45	-	20.86	-	-	16.558	-
	6415	93	-	20.84	-	-	16.587	-
UNII7	6535	117	-	20.94	-	-	16.567	-
	6695	149	-	20.63	-	-	16.565	-
	6855	181	-	20.77	-	-	16.595	-

10.2.2.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.47	18.00	19.71	17.995	16.617	18.331
	6175	45	19.41	18.03	19.48	18.259	17.050	18.150
	6415	93	19.33	18.04	19.65	18.204	17.100	18.145
UNII7	6535	117	19.34	17.96	19.46	17.857	16.811	18.144
	6695	149	19.02	17.87	19.47	17.660	16.948	18.005
	6855	181	19.32	18.14	19.62	17.565	16.963	18.180

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.20	18.00	19.61	17.694	16.710	18.012
	6175	45	19.56	18.58	19.49	18.108	16.857	18.142
	6415	93	19.64	18.63	19.62	17.777	16.987	18.069
UNII7	6535	117	19.47	18.36	19.66	17.787	16.982	18.099
	6695	149	19.60	18.24	19.64	18.144	17.029	18.172
	6855	181	19.59	18.34	19.59	18.173	16.924	18.037

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.51	-	20.13	18.138	-	18.205
	6175	45	19.61	-	20.16	18.186	-	18.084
	6415	93	19.59	-	20.21	18.167	-	18.051
UNII7	6535	117	19.58	-	19.88	18.206	-	18.135
	6695	149	19.57	-	20.06	18.209	-	18.147
	6855	181	19.65	-	20.00	18.229	-	18.132

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.95	-	-	19.024	-
	6175	45	-	21.00	-	-	19.032	-
	6415	93	-	21.01	-	-	19.032	-
UNII7	6535	117	-	21.02	-	-	19.033	-
	6695	149	-	20.91	-	-	19.036	-
	6855	181	-	20.95	-	-	19.035	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.19	-	-	19.042	-
	6175	45	-	21.32	-	-	19.035	-
	6415	93	-	21.48	-	-	18.998	-
UNII7	6535	117	-	21.38	-	-	19.078	-
	6695	149	-	21.29	-	-	19.029	-
	6855	181	-	21.30	-	-	19.020	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	18.75	22.07	20.80	17.285	20.278	18.575
	6165	43	19.28	21.32	19.59	17.884	19.810	18.023
	6405	91	19.73	22.05	20.07	18.527	19.899	18.516
UNII7	6565	123	20.31	21.85	20.21	18.303	19.970	18.457
	6685	147	19.82	21.48	20.06	18.454	19.929	18.452
	6845	179	20.15	21.56	21.31	18.365	19.826	18.457

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.40	22.41	20.49	18.041	19.402	18.320
	6165	43	20.21	22.85	24.16	18.092	19.902	18.326
	6405	91	21.00	22.30	20.71	18.025	19.382	18.362
UNII7	6565	123	20.71	22.10	22.81	18.234	19.753	18.260
	6685	147	20.54	22.32	21.50	18.231	19.704	17.764
	6845	179	20.99	22.67	25.17	18.164	19.316	18.494

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	31.46	23.90	27.66	18.095	18.904	18.257
	6165	43	31.31	30.74	26.34	17.932	19.300	18.215
	6405	91	31.28	23.57	23.77	18.095	19.155	18.178
UNII7	6565	123	31.21	23.96	22.31	17.954	19.097	18.104
	6685	147	21.62	30.64	27.60	17.915	19.674	18.174
	6845	179	31.45	23.29	26.35	18.118	19.268	18.185

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.80	-	36.17	19.373	-	19.772
	6165	43	34.86	-	36.29	19.461	-	20.045
	6405	91	34.89	-	36.10	19.402	-	19.682
UNII7	6565	123	35.02	-	35.84	19.373	-	19.833
	6685	147	34.80	-	36.04	19.437	-	19.649
	6845	179	34.98	-	35.63	19.445	-	19.865

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.34	-	-	37.960	-
	6165	43	-	41.44	-	-	37.944	-
	6405	91	-	41.40	-	-	38.006	-
UNII7	6565	123	-	41.48	-	-	37.977	-
	6685	147	-	41.48	-	-	37.970	-
	6845	179	-	41.46	-	-	38.008	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.66	-	-	37.920	-
	6165	43	-	42.00	-	-	37.974	-
	6405	91	-	42.52	-	-	37.992	-
UNII7	6565	123	-	42.52	-	-	37.946	-
	6685	147	-	42.24	-	-	37.985	-
	6845	179	-	42.48	-	-	37.969	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	23.47	22.02	25.41	20.096	21.284	20.663
	6145	39	21.84	22.99	25.07	19.376	20.916	20.110
	6385	87	23.39	26.82	21.15	19.871	20.552	19.287
UNII7	6625	135	23.19	27.72	24.76	19.689	21.895	20.575
	6705	151	24.48	23.21	24.22	20.303	21.544	19.878
	6785	167	24.91	26.10	25.22	20.294	21.248	20.244

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	27.33	32.09	27.69	20.238	21.924	19.985
	6145	39	29.33	29.58	27.45	20.248	21.962	19.872
	6385	87	27.78	29.38	27.86	20.151	21.900	20.613
UNII7	6625	135	26.25	32.55	27.04	19.620	21.643	20.193
	6705	151	26.88	31.83	27.35	20.168	22.224	20.073
	6785	167	27.13	30.12	29.25	19.898	21.942	20.427

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	28.62	35.24	29.26	19.467	21.020	20.058
	6145	39	28.87	34.42	27.41	20.109	20.847	19.271
	6385	87	28.30	34.01	28.79	19.592	20.570	20.139
UNII7	6625	135	29.05	33.47	27.82	19.245	21.827	20.258
	6705	151	29.18	34.64	27.81	18.892	21.333	20.284
	6785	167	28.60	33.69	27.99	19.411	21.892	20.225

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	33.07	34.46	32.36	22.313	23.238	22.774
	6145	39	32.48	36.55	31.75	22.364	23.552	22.772
	6385	87	33.38	35.29	32.26	22.664	22.855	22.313
UNII7	6625	135	32.89	35.90	34.56	22.419	22.281	22.839
	6705	151	34.86	36.77	32.77	22.778	23.064	22.590
	6785	167	33.50	35.66	32.67	22.600	22.910	22.620

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	69.49	-	72.33	54.199	-	43.577
	6145	39	69.37	-	72.63	53.823	-	43.723
	6385	87	69.50	-	72.83	54.088	-	43.526
UNII7	6625	135	69.81	-	71.51	54.341	-	42.216
	6705	151	68.54	-	71.24	54.086	-	42.341
	6785	167	69.52	-	70.85	54.452	-	43.366

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	86.89	-	-	77.721	-
	6145	39	-	86.48	-	-	77.674	-
	6385	87	-	87.95	-	-	77.711	-
UNII7	6625	135	-	86.99	-	-	77.724	-
	6705	151	-	86.36	-	-	77.665	-
	6785	167	-	86.09	-	-	77.645	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.77	-	-	77.745	-
	6145	39	-	87.08	-	-	77.676	-
	6385	87	-	87.34	-	-	77.913	-
UNII7	6625	135	-	87.93	-	-	77.768	-
	6705	151	-	88.03	-	-	77.900	-
	6785	167	-	86.60	-	-	77.711	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	24.86	26.03	25.71	21.846	25.265	24.773
	6185	47	27.90	21.46	22.56	22.382	21.474	22.106
	6345	79	26.98	29.92	28.30	21.890	25.455	26.314
UNII7	6665	143	26.88	26.92	27.41	22.062	24.241	25.659

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.25	32.01	34.31	21.888	24.211	25.248
	6185	47	29.80	36.20	34.04	23.903	22.603	25.978
	6345	79	25.48	34.45	32.00	21.700	25.834	27.496
UNII7	6665	143	28.22	35.43	32.48	21.885	26.349	26.347

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	30.10	36.04	40.18	21.788	25.287	26.687
	6185	47	35.58	44.40	37.06	24.281	25.274	24.498
	6345	79	32.54	42.94	37.23	23.060	25.719	24.520
UNII7	6665	143	28.66	38.34	37.98	23.752	25.178	25.595

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	40.98	43.08	40.62	27.617	26.035	25.731
	6185	47	40.70	41.80	47.09	28.228	26.144	27.830
	6345	79	41.12	42.38	42.37	28.328	26.106	25.694
UNII7	6665	143	88.72	44.49	45.19	30.231	26.855	24.845

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	86.82	-	70.08	43.353	-	49.360
	6185	47	87.63	-	100.9	43.343	-	48.397
	6345	79	86.93	-	103.4	47.450	-	48.597
UNII7	6665	143	86.29	-	68.36	49.152	-	49.021

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	138.8	-	-	79.609	-
	6185	47	-	140.6	-	-	79.708	-
	6345	79	-	139.4	-	-	79.767	-
UNII7	6665	143	-	139.6	-	-	79.830	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.51	27.40	24.17	24.952	27.496	21.141
	6185	47	23.67	29.37	21.81	24.222	28.767	20.226
	6345	79	26.82	25.85	25.13	25.449	25.805	23.534
UNII7	6665	143	26.26	25.84	27.28	23.924	26.697	21.887

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	39.82	30.19	27.92	27.119	27.046	23.241
	6185	47	28.05	36.62	26.63	25.938	25.831	23.381
	6345	79	28.01	29.35	29.27	26.139	26.557	24.039
UNII7	6665	143	31.06	34.24	26.66	25.043	27.248	22.836

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	40.55	38.66	33.81	26.994	29.177	22.695
	6185	47	41.72	41.55	33.58	26.819	28.701	22.586
	6345	79	40.30	41.55	31.13	27.386	27.663	22.637
UNII7	6665	143	38.52	35.40	35.08	25.365	26.583	23.000

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	50.95	53.64	46.34	31.383	27.316	30.371
	6185	47	48.22	46.73	41.28	31.718	28.994	26.752
	6345	79	48.98	52.10	43.56	29.682	29.184	28.820
UNII7	6665	143	49.64	48.92	39.87	30.040	28.458	26.688

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	91.79	-	85.72	47.400	-	50.008
	6185	47	93.47	-	86.32	52.063	-	49.201
	6345	79	93.83	-	85.46	52.049	-	49.626
UNII7	6665	143	91.67	-	69.76	47.852	-	48.111

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	130.7	-	-	81.438	-
	6185	47	-	130.2	-	-	81.254	-
	6345	79	-	131.9	-	-	80.896	-
UNII7	6665	143	-	126.3	-	-	80.471	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	171.9	-	-	157.24	-
	6185	47	-	177.1	-	-	157.02	-
	6345	79	-	171.7	-	-	157.12	-
UNII7	6665	143	-	173.6	-	-	156.99	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	222.8	-	-	156.75	-
	6185	47	-	173.7	-	-	156.79	-
	6345	79	-	171.9	-	-	156.72	-
UNII7	6665	143	-	175.3	-	-	156.82	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	173.7	31.01	101.5	89.152	32.411	37.732
	6265	63	167.4	130.3	104.6	75.590	36.880	40.831

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	32.44	39.61	100.4	33.882	40.630	57.587
	6265	63	29.37	44.54	107.9	31.777	39.126	52.038

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	171.0	144.9	108.2	36.881	55.420	38.845
	6265	63	168.0	134.4	111.0	41.263	47.570	37.750

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	172.3	161.5	128.8	139.96	75.555	115.10
	6265	63	175.1	165.1	136.0	89.354	143.02	112.07

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	179.9	-	152.7	159.58	-	124.91
	6265	63	178.6	-	149.9	163.58	-	128.52

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.6	-	-	102.99	-
	6265	63	-	169.1	-	-	100.90	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	86.39	53.77	38.18	34.958	37.279	36.836
	6265	63	37.77	37.07	35.22	34.585	37.831	37.084

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	43.39	47.25	43.39	34.977	39.336	43.432
	6265	63	49.57	39.81	44.69	40.543	38.216	39.539

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	101.1	63.50	44.82	48.886	52.517	37.168
	6265	63	51.59	54.98	46.01	39.594	47.224	36.795

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	113.2	86.48	67.55	76.827	67.019	36.735
	6265	63	107.5	91.81	75.77	54.566	64.434	48.313

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	125.1	-	124.2	100.66	-	88.625
	6265	63	123.2	-	119.6	99.218	-	89.276

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	170.3	-	-	101.31	-
	6265	63	-	176.1	-	-	102.34	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	33.81	67.05	42.36	36.002	41.312	36.781
	6265	63	33.41	70.22	42.33	34.711	38.949	34.463

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	44.04	52.62	93.12	40.087	39.699	59.470
	6265	63	37.69	58.39	95.55	38.224	40.637	90.964
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	54.59	73.06	98.45	41.638	60.222	40.527
	6265	63	57.71	77.41	97.94	42.079	51.648	39.729
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	73.36	74.42	109.7	45.404	51.011	90.214
	6265	63	72.01	66.73	110.3	46.973	49.308	88.047
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	100.7	-	105.0	71.061	-	90.411
	6265	63	98.31	-	107.2	73.824	-	90.108
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	180.3	-	-	93.242	-
	6265	63	-	181.8	-	-	95.294	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	109.6	142.0	31.59	41.062	39.443	37.497
	6265	63	107.5	147.4	163.7	48.083	39.767	37.650
Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	37.77	51.51	171.2	39.812	44.348	42.107
	6265	63	50.45	35.98	168.3	40.352	39.858	130.43

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	115.1	155.5	169.3	54.110	57.015	39.747
	6265	63	104.2	154.7	163.3	42.652	138.52	37.969

Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	128.6	142.7	177.8	109.96	125.86	164.39
	6265	63	122.9	141.0	178.6	106.07	122.00	90.360

Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	151.8	-	180.1	124.25	-	162.55
	6265	63	156.3	-	172.8	124.69	-	162.06

Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	172.6	-	-	104.37	-
	6265	63	-	173.6	-	-	101.19	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	266.6	-	-	188.08	-
	6265	63	-	266.5	-	-	204.35	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	291.8	-	-	229.45	-
	6265	63	-	289.3	-	-	230.20	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	331.9	-	-	315.04	-
	6265	63	-	331.7	-	-	315.04	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	332.6	-	-	315.05	-
	6265	63	-	333.8	-	-	315.11	-

802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.95	-	-	16.589	-
	6175	45	-	20.71	-	-	16.570	-
	6415	93	-	20.73	-	-	16.601	-
UNII7	6535	117	-	20.90	-	-	16.595	-
	6695	149	-	20.98	-	-	16.576	-
	6855	181	-	20.93	-	-	16.563	-

10.2.3 26 dB BANDWIDTH(Very Low Power Device)

10.2.3.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.20	18.09	19.75	18.068	17.118	18.228
	6175	45	19.58	17.99	19.57	18.251	16.962	18.275
	6415	93	19.38	17.97	19.47	18.179	16.728	18.265
UNII7	6535	117	19.41	17.98	19.73	18.254	15.839	18.220
	6695	149	18.99	18.08	19.50	17.923	16.843	18.172
	6855	181	19.01	17.32	19.30	17.819	16.130	18.186

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.58	18.46	19.60	17.710	16.859	17.953
	6175	45	18.87	18.25	19.67	17.292	16.402	18.038
	6415	93	19.17	18.01	19.66	17.709	16.698	18.205
UNII7	6535	117	19.70	18.56	19.49	18.119	16.836	18.076
	6695	149	19.62	18.23	19.62	18.197	16.904	17.917
	6855	181	19.45	18.05	19.71	17.623	17.063	18.139

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.70	-	19.83	18.151	-	18.063
	6175	45	19.72	-	20.01	18.226	-	18.178
	6415	93	19.56	-	20.08	18.165	-	18.133
UNII7	6535	117	19.74	-	20.07	18.187	-	17.748
	6695	149	19.62	-	20.39	18.043	-	18.169
	6855	181	19.71	-	20.15	18.164	-	18.203

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.01	-	-	19.046	-
	6175	45	-	21.08	-	-	19.044	-
	6415	93	-	20.94	-	-	19.035	-
UNII7	6535	117	-	21.04	-	-	19.030	-
	6695	149	-	21.05	-	-	19.029	-
	6855	181	-	21.02	-	-	19.038	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.44	-	-	19.070	-
	6175	45	-	21.26	-	-	19.036	-
	6415	93	-	21.64	-	-	19.036	-
UNII7	6535	117	-	21.42	-	-	19.091	-
	6695	149	-	21.20	-	-	19.030	-
	6855	181	-	21.45	-	-	19.018	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	16.79	22.22	20.93	15.103	20.181	18.565
	6165	43	20.16	21.93	20.65	18.518	20.001	18.468
	6405	91	17.70	21.45	20.68	16.342	20.123	18.260
UNII7	6565	123	19.87	22.33	20.93	18.488	20.257	17.934
	6685	147	19.63	21.79	19.99	18.444	20.017	18.379
	6845	179	19.79	21.26	19.94	18.269	19.979	18.325

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.14	23.03	20.85	18.145	19.572	18.276
	6165	43	20.42	23.44	23.97	18.280	19.669	18.440
	6405	91	20.34	22.57	22.03	18.353	19.842	17.639
UNII7	6565	123	20.53	22.51	25.79	18.201	19.725	18.382
	6685	147	21.18	22.71	25.79	18.235	19.912	18.411
	6845	179	20.61	23.51	26.80	18.344	19.869	18.345

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	21.64	30.62	26.12	18.047	19.729	18.041
	6165	43	31.35	28.98	26.49	18.095	19.287	18.113
	6405	91	29.71	30.34	25.25	18.036	19.241	18.262
UNII7	6565	123	21.83	29.79	26.03	18.055	18.863	18.407
	6685	147	23.04	23.81	26.13	17.925	19.388	18.193
	6845	179	21.65	23.10	26.33	18.082	19.225	18.149

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.73	-	35.28	19.396	-	19.920
	6165	43	34.74	-	35.98	19.380	-	19.667
	6405	91	34.84	-	36.05	19.481	-	19.877
UNII7	6565	123	34.91	-	36.50	19.441	-	20.128
	6685	147	34.86	-	36.13	19.446	-	19.711
	6845	179	34.61	-	36.28	19.451	-	20.422

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.56	-	-	38.001	-
	6165	43	-	41.48	-	-	37.972	-
	6405	91	-	41.56	-	-	37.986	-
UNII7	6565	123	-	41.63	-	-	37.998	-
	6685	147	-	41.64	-	-	37.985	-
	6845	179	-	41.39	-	-	37.987	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.79	-	-	37.950	-
	6165	43	-	42.30	-	-	38.034	-
	6405	91	-	42.54	-	-	37.964	-
UNII7	6565	123	-	42.62	-	-	37.955	-
	6685	147	-	42.68	-	-	37.944	-
	6845	179	-	42.11	-	-	37.977	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	22.43	21.94	24.76	19.927	21.100	20.885
	6145	39	24.46	26.30	23.72	20.592	21.698	20.720
	6385	87	22.53	26.37	26.77	20.255	22.012	20.334
UNII7	6625	135	23.15	22.13	24.73	20.494	22.003	21.128
	6705	151	21.55	24.99	23.82	20.133	22.319	21.470
	6785	167	23.27	26.13	23.18	20.276	22.598	20.766

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	27.78	31.81	27.49	20.222	22.394	20.927
	6145	39	27.00	34.09	27.77	19.992	23.086	20.099
	6385	87	27.40	29.58	27.27	19.519	21.238	20.287
UNII7	6625	135	27.89	33.81	27.68	20.568	22.221	20.473
	6705	151	26.89	29.87	27.30	19.853	22.062	20.361
	6785	167	29.10	32.69	28.84	20.239	22.309	21.866

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.93	31.95	29.98	19.267	21.049	20.554
	6145	39	27.66	34.81	27.17	19.269	21.474	20.382
	6385	87	26.96	33.65	30.14	19.642	21.535	19.179
UNII7	6625	135	27.74	36.05	27.60	19.144	21.642	19.635
	6705	151	28.57	33.67	28.53	19.299	20.683	21.227
	6785	167	27.62	33.91	28.38	20.150	21.974	19.533

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	31.40	34.29	31.22	22.004	22.276	22.686
	6145	39	31.98	34.96	32.56	22.217	22.685	22.886
	6385	87	32.97	35.14	32.43	22.673	22.716	22.821
UNII7	6625	135	33.15	35.03	35.36	22.615	22.003	23.449
	6705	151	32.04	35.02	32.24	21.870	23.291	22.314
	6785	167	33.17	35.28	31.80	22.125	23.577	22.417

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	68.27	-	70.38	52.817	-	43.655
	6145	39	69.08	-	71.21	54.072	-	42.941
	6385	87	67.56	-	70.18	52.529	-	42.687
UNII7	6625	135	69.69	-	72.02	53.479	-	43.605
	6705	151	69.12	-	70.93	53.107	-	43.698
	6785	167	69.57	-	72.61	52.942	-	43.941

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.88	-	-	77.788	-
	6145	39	-	87.33	-	-	77.714	-
	6385	87	-	87.24	-	-	77.695	-
UNII7	6625	135	-	87.58	-	-	77.743	-
	6705	151	-	87.51	-	-	77.699	-
	6785	167	-	87.04	-	-	77.712	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	86.57	-	-	77.711	-
	6145	39	-	86.51	-	-	77.795	-
	6385	87	-	86.90	-	-	77.772	-
UNII7	6625	135	-	87.76	-	-	77.734	-
	6705	151	-	88.09	-	-	77.766	-
	6785	167	-	89.72	-	-	77.720	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	26.54	27.03	31.41	24.216	25.088	30.045
	6185	47	27.75	29.60	29.68	25.616	29.580	30.148
	6345	79	16.28	28.23	16.76	27.078	26.364	28.213
UNII7	6665	143	26.27	26.20	25.35	24.866	26.217	26.432

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	30.79	34.57	34.33	22.776	27.188	28.181
	6185	47	24.93	34.74	33.85	21.357	28.099	28.672
	6345	79	24.33	34.03	33.81	24.007	28.583	29.043
UNII7	6665	143	29.90	34.98	33.97	24.132	25.383	29.418

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	31.60	38.67	34.13	24.173	26.733	25.415
	6185	47	32.13	33.62	35.57	23.620	24.507	24.558
	6345	79	36.42	38.62	35.85	24.616	25.739	25.389
UNII7	6665	143	32.81	40.45	38.14	23.651	25.713	25.413

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	43.32	43.93	46.39	29.034	26.493	27.279
	6185	47	46.20	41.05	46.71	30.075	27.940	27.194
	6345	79	38.13	44.11	47.25	28.514	28.040	26.870
UNII7	6665	143	44.57	44.54	42.50	28.061	27.303	26.284

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	68.79	-	103.4	42.263	-	49.181
	6185	47	71.44	-	107.0	44.510	-	49.467
	6345	79	88.13	-	105.3	44.045	-	49.201
UNII7	6665	143	67.76	-	104.4	43.962	-	48.969

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	141.2	-	-	79.701	-
	6185	47	-	141.6	-	-	79.693	-
	6345	79	-	141.9	-	-	80.302	-
UNII7	6665	143	-	140.4	-	-	80.117	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	28.58	27.98	28.52	27.323	32.240	27.781
	6185	47	28.68	28.74	27.96	30.014	35.287	30.283
	6345	79	28.76	27.20	23.91	29.411	33.113	28.376
UNII7	6665	143	25.20	25.42	26.94	26.648	31.495	26.214

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	29.95	36.83	30.80	26.194	29.321	27.485
	6185	47	33.88	33.01	26.28	26.754	29.097	28.380
	6345	79	31.37	30.89	29.91	24.399	28.847	25.774
UNII7	6665	143	32.85	38.26	32.92	27.461	31.600	27.975

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	38.66	34.90	35.31	26.232	29.268	24.514
	6185	47	37.25	33.87	35.23	25.214	27.808	25.303
	6345	79	37.38	39.94	33.64	25.343	29.152	24.945
UNII7	6665	143	33.64	28.54	34.85	25.348	26.974	23.939

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	50.33	50.02	42.46	30.850	29.087	27.902
	6185	47	50.72	52.99	41.11	31.659	30.091	26.834
	6345	79	47.86	49.12	41.34	31.955	28.513	26.396
UNII7	6665	143	49.29	50.86	52.03	30.937	27.756	31.446

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	102.1	-	74.36	53.852	-	50.035
	6185	47	95.71	-	73.01	55.204	-	49.495
	6345	79	95.05	-	86.96	52.592	-	48.384
UNII7	6665	143	96.94	-	72.12	48.471	-	49.693

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	131.5	-	-	82.049	-
	6185	47	-	132.9	-	-	82.508	-
	6345	79	-	132.9	-	-	81.023	-
UNII7	6665	143	-	131.4	-	-	81.278	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	178.2	-	-	157.12	-
	6185	47	-	174.9	-	-	157.12	-
	6345	79	-	174.0	-	-	157.07	-
UNII7	6665	143	-	176.5	-	-	157.03	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	170.3	-	-	156.55	-
	6185	47	-	171.0	-	-	156.56	-
	6345	79	-	174.1	-	-	156.68	-
UNII7	6665	143	-	170.6	-	-	156.47	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	37.28	132.3	45.04	63.940	76.563	61.511
	6265	63	170.1	132.4	99.77	167.36	92.258	77.596

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	31.14	53.42	111.5	40.786	47.187	95.662
	6265	63	32.71	43.29	107.5	40.364	47.907	103.11

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	164.8	136.5	47.85	40.926	48.799	41.275
	6265	63	44.01	137.1	50.61	36.867	124.86	39.424

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	172.5	166.3	131.7	89.116	148.45	112.15
	6265	63	172.4	162.8	129.0	158.46	148.24	103.05

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	179.1	-	152.8	160.71	-	129.34
	6265	63	179.6	-	152.8	161.70	-	128.61

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	169.5	-	-	97.450	-
	6265	63	-	171.7	-	-	111.38	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	93.39	55.48	36.88	100.95	61.173	56.404
	6265	63	95.40	35.07	43.20	127.63	71.471	72.885
Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	39.00	38.97	36.79	45.259	44.697	50.829
	6265	63	41.42	45.41	40.67	57.673	47.225	45.555
Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	99.91	62.45	45.07	54.576	53.112	37.273
	6265	63	99.82	59.72	48.37	48.664	45.448	40.926
Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	107.4	86.54	63.46	71.348	68.173	40.394
	6265	63	113.0	86.66	71.22	90.821	70.726	39.974
Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	124.8	-	153.7	102.24	-	91.721
	6265	63	124.8	-	152.7	99.456	-	91.565
Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.3	-	-	100.94	-
	6265	63	-	178.8	-	-	101.36	-
Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	36.40	66.55	36.43	59.509	69.148	114.28
	6265	63	37.72	67.59	93.97	71.575	75.198	101.32

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	51.33	43.78	98.70	42.552	50.375	102.83
	6265	63	44.47	37.62	101.7	47.900	54.669	96.297
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	56.90	78.32	95.88	43.213	64.144	43.447
	6265	63	53.84	72.06	97.82	40.518	64.199	41.592
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	75.68	70.44	110.3	43.807	51.933	91.592
	6265	63	82.73	71.95	111.6	48.116	46.192	87.866
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	102.2	-	106.2	75.000	-	88.310
	6265	63	100.4	-	106.9	71.587	-	92.536
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	177.5	-	-	93.352	-
	6265	63	-	182.1	-	-	94.187	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	100.2	147.2	165.0	99.236	143.18	162.74
	6265	63	35.56	144.8	164.1	70.006	115.61	161.86
Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	54.26	36.81	170.7	51.863	53.865	163.87
	6265	63	43.60	43.22	172.1	48.730	53.119	163.75

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	111.4	156.1	168.4	45.934	61.832	43.119
	6265	63	107.5	153.7	168.8	50.479	143.23	41.422
Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	126.8	146.2	176.5	108.81	123.89	163.21
	6265	63	128.2	144.7	172.8	110.42	125.43	163.30
Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	154.8	-	179.1	125.93	-	159.06
	6265	63	157.5	-	180.8	127.99	-	163.43
Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.7	-	-	108.74	-
	6265	63	-	173.4	-	-	102.41	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	266.7	-	-	196.49	-
	6265	63	-	267.1	-	-	212.28	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	288.7	-	-	233.59	-
	6265	63	-	289.6	-	-	229.53	-
Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	328.7	-	-	314.91	-
	6265	63	-	331.4	-	-	314.76	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	333.5	-	-	314.78	-
	6265	63	-	331.5	-	-	314.60	-
Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.92	-	-	16.567	-
	6175	45	-	20.90	-	-	16.564	-
	6415	93	-	20.86	-	-	16.576	-
UNII7	6535	117	-	20.97	-	-	16.580	-
	6695	149	-	20.97	-	-	16.599	-
	6855	181	-	20.94	-	-	16.613	-

10.2.3.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.51	17.81	19.50	17.748	16.588	17.878
	6175	45	19.38	17.94	19.51	18.208	16.958	18.056
	6415	93	19.29	18.01	19.55	18.205	17.127	18.257
UNII7	6535	117	18.34	17.94	19.69	17.095	16.283	18.334
	6695	149	19.20	17.94	19.63	17.965	16.899	18.125
	6855	181	19.55	17.94	19.49	17.346	16.991	18.223

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.68	18.11	19.53	18.148	16.459	17.575
	6175	45	19.55	18.64	19.56	18.221	16.780	18.214
	6415	93	18.54	17.74	19.59	17.029	16.475	17.662
UNII7	6535	117	19.62	18.15	20.00	18.138	17.142	17.413
	6695	149	19.71	18.41	19.61	18.195	16.805	18.036
	6855	181	19.67	18.54	19.59	18.084	17.146	18.098

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.70	-	20.13	17.964	-	18.222
	6175	45	19.57	-	20.30	18.163	-	18.117
	6415	93	19.56	-	20.21	18.158	-	18.139
UNII7	6535	117	19.61	-	20.20	18.179	-	18.123
	6695	149	19.72	-	20.11	18.225	-	18.086
	6855	181	19.57	-	20.07	18.171	-	18.031

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.05	-	-	19.032	-
	6175	45	-	20.98	-	-	19.035	-
	6415	93	-	20.85	-	-	19.024	-
UNII7	6535	117	-	20.92	-	-	19.045	-
	6695	149	-	20.98	-	-	19.030	-
	6855	181	-	20.94	-	-	19.013	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.27	-	-	19.031	-
	6175	45	-	21.37	-	-	19.029	-
	6415	93	-	21.18	-	-	19.056	-
UNII7	6535	117	-	21.55	-	-	19.024	-
	6695	149	-	21.46	-	-	19.053	-
	6855	181	-	21.28	-	-	19.048	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.87	22.13	20.69	18.285	20.224	18.550
	6165	43	20.02	21.62	20.04	18.283	19.967	18.616
	6405	91	19.83	21.24	20.57	18.294	19.639	18.431
UNII7	6565	123	20.42	21.83	20.51	18.448	19.515	18.487
	6685	147	20.68	20.45	20.17	17.913	18.271	17.899
	6845	179	18.90	21.36	22.59	17.502	19.278	18.676

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.82	22.89	21.97	18.087	19.712	18.365
	6165	43	20.50	22.84	25.19	18.186	19.853	18.331
	6405	91	20.57	23.47	25.63	18.192	19.807	18.299
UNII7	6565	123	20.73	22.56	22.86	18.204	19.302	18.423
	6685	147	20.53	23.04	25.34	18.127	19.610	18.459
	6845	179	20.68	22.77	22.35	18.027	19.666	18.297

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	22.14	30.76	26.18	18.082	19.803	18.295
	6165	43	23.46	30.05	27.71	17.990	18.990	18.141
	6405	91	21.88	30.77	27.80	18.030	19.423	18.289
UNII7	6565	123	21.76	23.29	26.39	18.043	19.292	18.214
	6685	147	21.47	30.53	27.49	17.948	19.249	18.223
	6845	179	31.17	24.14	27.71	18.084	19.232	18.042

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.71	-	35.70	19.384	-	19.900
	6165	43	34.86	-	35.73	19.335	-	19.964
	6405	91	34.87	-	35.42	19.385	-	20.047
UNII7	6565	123	34.69	-	36.33	19.399	-	19.667
	6685	147	34.54	-	36.23	19.462	-	19.815
	6845	179	34.75	-	36.30	19.448	-	20.298

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.41	-	-	37.987	-
	6165	43	-	41.54	-	-	37.981	-
	6405	91	-	41.83	-	-	37.967	-
UNII7	6565	123	-	41.62	-	-	37.979	-
	6685	147	-	41.66	-	-	37.944	-
	6845	179	-	41.44	-	-	37.959	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.46	-	-	37.971	-
	6165	43	-	42.21	-	-	37.977	-
	6405	91	-	42.36	-	-	37.980	-
UNII7	6565	123	-	42.94	-	-	37.963	-
	6685	147	-	42.26	-	-	37.977	-
	6845	179	-	42.47	-	-	37.913	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	21.60	24.97	25.34	19.744	21.393	19.738
	6145	39	23.33	24.00	24.07	20.252	21.583	20.917
	6385	87	22.18	26.75	21.82	19.862	22.020	20.404
UNII7	6625	135	24.37	24.93	24.95	20.760	21.999	20.432
	6705	151	21.02	25.69	24.99	19.588	21.424	20.290
	6785	167	23.80	26.19	24.53	19.818	21.681	20.100

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	28.44	28.17	25.84	19.864	22.903	20.410
	6145	39	27.41	32.45	25.12	19.951	21.358	20.565
	6385	87	27.81	32.59	27.98	19.890	23.001	20.751
UNII7	6625	135	29.61	28.48	25.21	20.849	22.193	20.468
	6705	151	23.39	31.12	28.52	19.801	21.511	19.449
	6785	167	27.63	30.49	27.54	20.385	22.061	20.370

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	29.03	34.68	30.32	20.224	21.452	19.547
	6145	39	26.60	33.52	30.62	20.185	22.438	21.015
	6385	87	26.70	33.55	27.69	19.206	23.601	19.031
UNII7	6625	135	27.68	34.95	28.30	19.250	22.030	19.680
	6705	151	27.95	34.75	28.12	19.702	20.327	20.015
	6785	167	28.57	32.12	29.28	19.682	22.722	19.107

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	31.16	34.87	31.95	22.440	23.014	22.545
	6145	39	33.46	34.58	33.04	22.225	22.768	22.542
	6385	87	44.45	35.38	32.47	22.487	23.605	22.804
UNII7	6625	135	34.72	35.20	35.60	22.541	22.671	22.921
	6705	151	32.68	34.95	31.16	22.380	23.059	22.464
	6785	167	33.20	35.94	31.22	22.679	23.399	22.342

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	68.06	-	72.96	52.762	-	44.263
	6145	39	69.41	-	71.81	54.167	-	43.624
	6385	87	67.72	-	71.17	52.980	-	43.195
UNII7	6625	135	69.22	-	71.11	53.536	-	42.001
	6705	151	69.19	-	69.32	54.340	-	42.455
	6785	167	68.40	-	71.45	54.536	-	42.715

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.38	-	-	77.716	-
	6145	39	-	86.86	-	-	77.671	-
	6385	87	-	86.82	-	-	77.693	-
UNII7	6625	135	-	87.00	-	-	77.738	-
	6705	151	-	86.71	-	-	77.701	-
	6785	167	-	86.54	-	-	77.675	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.32	-	-	77.683	-
	6145	39	-	89.05	-	-	77.737	-
	6385	87	-	89.09	-	-	77.821	-
UNII7	6625	135	-	85.84	-	-	77.785	-
	6705	151	-	87.87	-	-	77.698	-
	6785	167	-	86.77	-	-	77.738	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	24.54	26.53	29.53	25.003	24.227	27.715
	6185	47	25.26	29.17	27.02	24.882	24.796	25.932
	6345	79	22.42	24.82	31.05	20.460	24.227	26.928
UNII7	6665	143	26.28	28.82	26.21	23.046	25.957	25.929

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	27.46	34.74	35.60	22.751	25.916	28.927
	6185	47	30.63	32.83	30.66	26.270	25.967	27.150
	6345	79	27.52	36.92	32.73	22.658	26.612	29.048
UNII7	6665	143	29.97	31.51	27.34	23.917	25.844	27.832

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	32.75	35.62	36.92	23.971	25.057	25.363
	6185	47	34.73	34.81	32.81	24.738	25.575	24.835
	6345	79	33.20	39.06	36.06	24.259	25.624	25.055
UNII7	6665	143	34.45	33.51	37.19	24.912	26.436	26.611

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	43.51	44.15	44.47	28.891	27.352	26.992
	6185	47	45.69	40.83	47.23	30.359	28.265	28.298
	6345	79	43.34	41.96	43.04	29.059	27.877	26.378
UNII7	6665	143	44.84	45.19	43.02	29.167	27.882	26.216

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	88.51	-	105.4	43.956	-	49.178
	6185	47	88.32	-	105.5	43.869	-	49.544
	6345	79	87.31	-	105.8	44.881	-	49.036
UNII7	6665	143	87.66	-	111.2	45.127	-	48.958

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	139.0	-	-	79.909	-
	6185	47	-	142.3	-	-	79.830	-
	6345	79	-	141.5	-	-	80.117	-
UNII7	6665	143	-	142.2	-	-	80.420	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	27.94	30.38	26.16	28.002	32.456	26.458
	6185	47	26.03	28.90	25.87	26.346	30.828	23.484
	6345	79	17.72	32.27	23.84	22.550	30.631	25.061
UNII7	6665	143	28.80	31.52	29.52	28.458	28.591	27.383

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.72	35.46	29.72	20.474	28.142	26.626
	6185	47	33.02	37.72	26.11	27.052	31.291	25.113
	6345	79	30.99	37.01	24.43	26.303	28.016	25.375
UNII7	6665	143	33.54	38.68	27.93	26.232	28.389	23.479

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	42.26	36.58	86.52	26.392	29.772	24.336
	6185	47	42.66	36.73	33.05	27.164	28.453	24.122
	6345	79	40.36	39.15	33.36	26.843	30.189	24.326
UNII7	6665	143	40.78	38.91	34.74	25.546	28.802	24.755

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	49.69	52.13	85.53	30.991	29.238	27.712
	6185	47	49.83	49.48	42.03	30.378	29.781	28.126
	6345	79	50.65	50.40	41.80	31.313	28.569	27.242
UNII7	6665	143	48.72	49.41	47.78	31.958	27.353	30.671

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	96.98	-	87.59	56.038	-	51.181
	6185	47	97.63	-	87.15	54.559	-	49.184
	6345	79	96.30	-	87.29	54.798	-	49.665
UNII7	6665	143	96.50	-	88.40	55.233	-	48.893

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	132.0	-	-	79.771	-
	6185	47	-	127.8	-	-	80.121	-
	6345	79	-	131.2	-	-	80.201	-
UNII7	6665	143	-	127.7	-	-	79.635	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	174.4	-	-	157.13	-
	6185	47	-	175.2	-	-	157.00	-
	6345	79	-	173.5	-	-	157.18	-
UNII7	6665	143	-	173.2	-	-	156.99	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	172.5	-	-	156.76	-
	6185	47	-	173.0	-	-	156.76	-
	6345	79	-	172.8	-	-	156.66	-
UNII7	6665	143	-	171.5	-	-	156.74	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	164.6	131.5	31.76	161.28	86.235	43.858
	6265	63	170.8	128.8	38.45	92.689	57.141	46.272

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	36.69	39.44	102.9	45.776	41.736	98.514
	6265	63	36.42	45.80	110.6	45.506	41.898	45.960

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	168.9	141.4	114.2	86.870	58.258	40.604
	6265	63	49.62	136.6	47.23	39.167	124.05	41.372

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	174.1	165.0	133.8	85.645	147.89	111.45
	6265	63	172.3	160.9	125.5	160.91	147.50	109.52

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	178.4	-	153.1	163.38	-	128.55
	6265	63	178.5	-	154.5	162.62	-	129.00

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	169.6	-	-	97.155	-
	6265	63	-	171.3	-	-	108.97	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	94.09	35.06	39.76	95.522	51.113	45.816
	6265	63	34.94	54.47	38.11	49.997	47.400	46.935
Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	55.10	39.87	42.11	50.623	42.897	42.807
	6265	63	40.05	37.78	44.12	37.342	43.850	44.541
Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.2	52.04	43.81	55.555	41.546	38.523
	6265	63	100.1	64.35	44.28	50.752	50.620	37.626
Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	108.5	89.57	62.06	92.200	67.602	40.349
	6265	63	103.7	90.61	62.09	68.230	72.510	39.369
Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	127.8	-	154.4	102.82	-	90.523
	6265	63	123.7	-	151.6	96.283	-	89.954
Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.6	-	-	103.48	-
	6265	63	-	173.8	-	-	104.66	-
Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	33.57	66.73	41.16	38.575	54.267	45.817
	6265	63	33.53	43.83	34.05	42.177	49.485	72.964

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	44.50	39.18	41.80	40.198	42.427	43.654
	6265	63	46.71	44.91	93.33	43.518	43.410	92.958
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	42.73	68.63	95.31	40.050	48.371	44.924
	6265	63	59.61	64.11	98.48	42.002	60.532	43.397
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	78.86	74.35	108.2	45.742	50.511	88.187
	6265	63	80.32	65.04	110.3	45.083	50.735	77.592
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	103.8	-	109.6	75.179	-	93.105
	6265	63	98.59	-	106.4	73.985	-	89.974
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	176.4	-	-	94.892	-
	6265	63	-	183.3	-	-	94.903	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	108.4	139.0	165.3	102.88	51.665	72.093
	6265	63	105.8	151.3	169.5	102.18	99.666	65.477
Mode : EHT320(80HH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	54.57	49.95	166.9	44.589	50.748	125.58
	6265	63	46.39	45.28	33.96	45.792	51.618	47.625

Mode : EHT320(80HH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	113.2	150.9	168.1	53.045	143.99	42.415
	6265	63	114.8	153.2	40.89	102.09	143.11	39.532
Mode : EHT320(80HH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	129.3	146.7	179.4	107.26	127.66	163.53
	6265	63	130.2	146.3	178.1	110.95	127.57	162.96
Mode : EHT320(80HH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	154.0	-	179.8	125.66	-	159.16
	6265	63	155.1	-	176.5	125.36	-	162.78
Mode : EHT320(80HH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	172.4	-	-	106.19	-
	6265	63	-	169.7	-	-	101.15	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	265.4	-	-	189.10	-
	6265	63	-	266.0	-	-	219.06	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	289.6	-	-	230.60	-
	6265	63	-	288.5	-	-	224.84	-
Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	331.1	-	-	314.95	-
	6265	63	-	331.0	-	-	315.17	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	333.2	-	-	314.72	-
	6265	63	-	329.3	-	-	314.99	-

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.70	-	-	16.578	-
	6175	45	-	20.67	-	-	16.591	-
	6415	93	-	21.07	-	-	16.579	-
UNII7	6535	117	-	21.01	-	-	16.560	-
	6695	149	-	21.04	-	-	16.596	-
	6855	181	-	21.04	-	-	16.565	-

Test Plots(26dB & 99% Bandwidth)

[Indoor Cilent]

Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]


802.11be EHT20M Ch.209(6995 MHz) SU



802.11be EHT40M Ch.91(6405 MHz) SU




802.11be EHT80M Ch.215(7025 MHz) SU

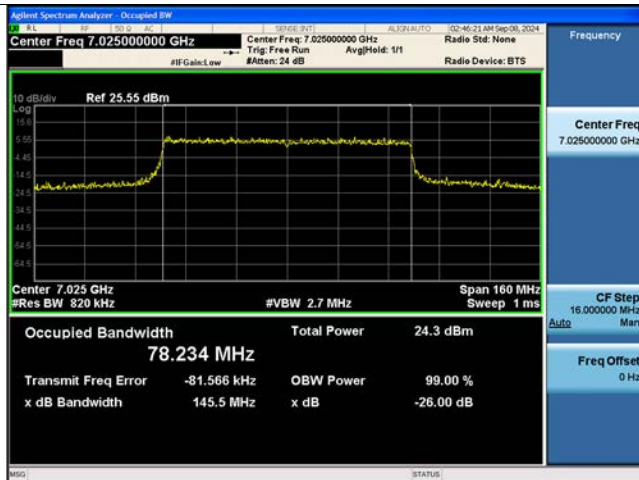


802.11be EHT160M Ch.207(6985 MHz) 2x996 Tones 68 RU



Bandwidth 320M, Ch. 95(6425 MHz) 4x996 Tones 69 RU

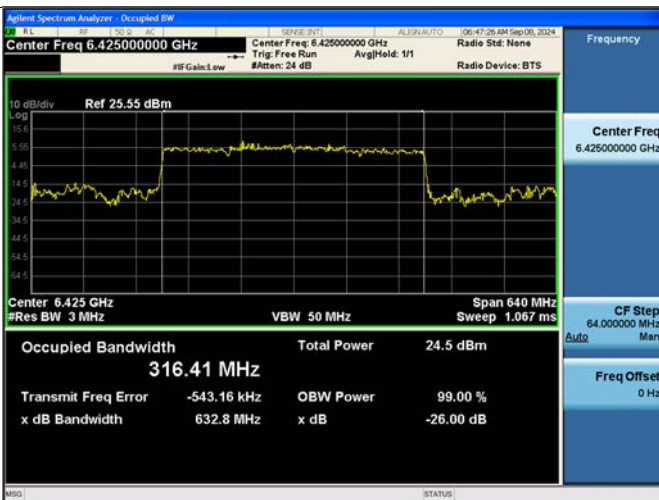


802.11a Ch.45(6175 MHz)

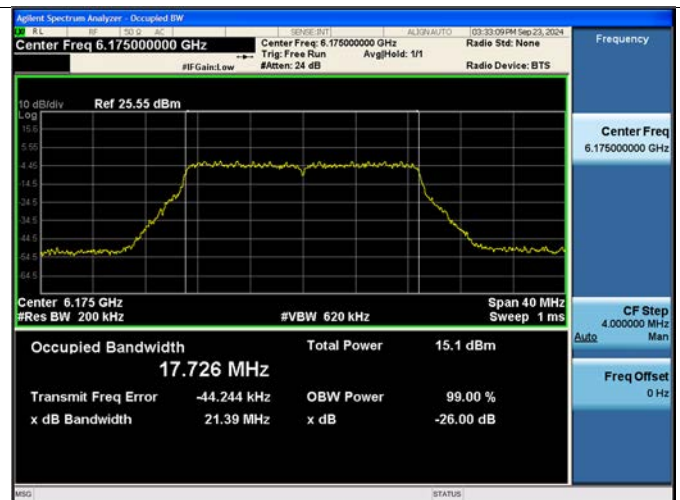


[Ant.2]


802.11be EHT20M Ch.181(6855 MHz) SU

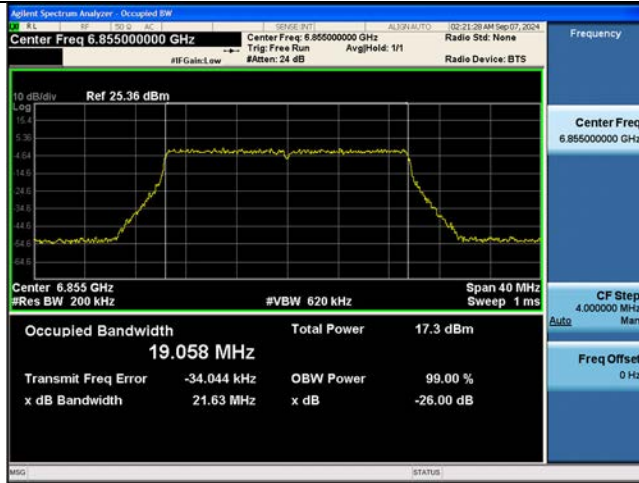


802.11be EHT40M Ch.227(7085 MHz) SU

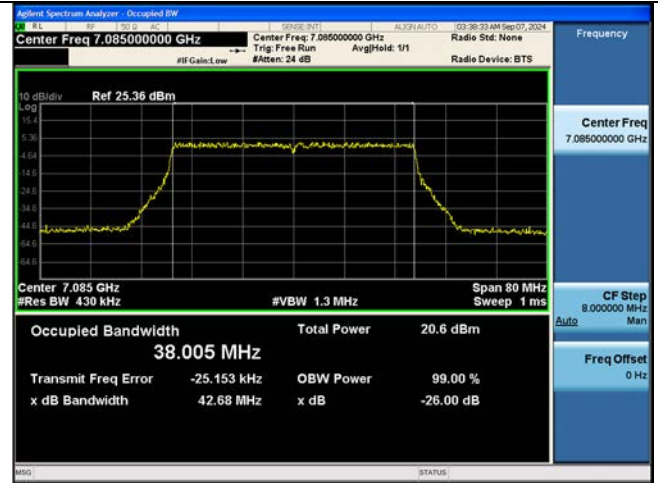


802.11be EHT80M Ch.39(6145 MHz) SU

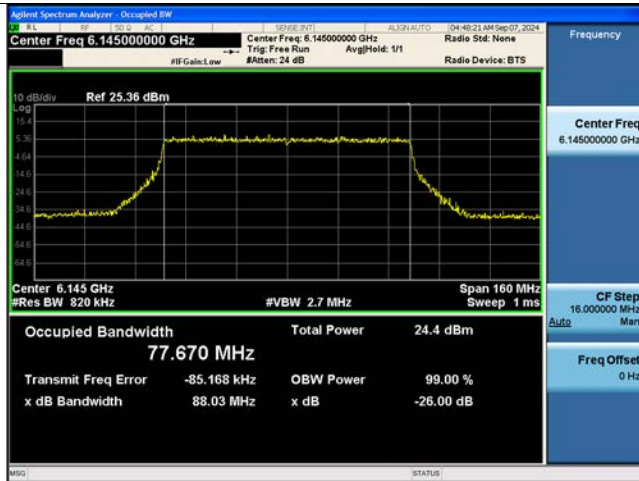


802.11be EHT160M Ch.15(6025 MHz) 2x996 Tones 68 RU

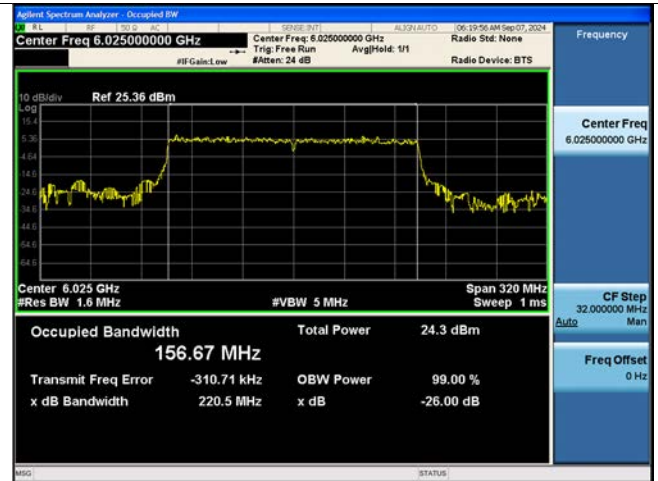

Bandwidth 320M, Ch. 127(6585 MHz) SU

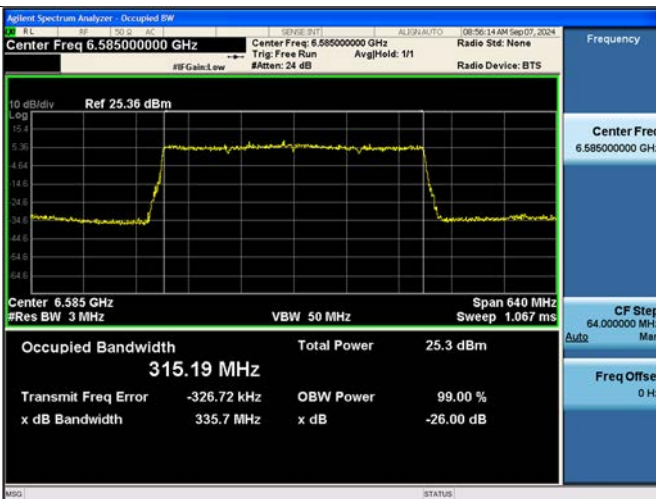

802.11a Ch.113(6515 MHz)

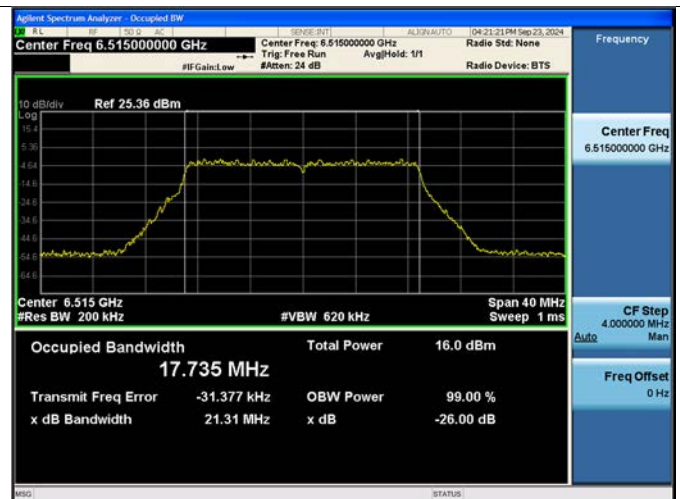


[Standard Client]


Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]


802.11be EHT20M Ch.181(6855 MHz) SU

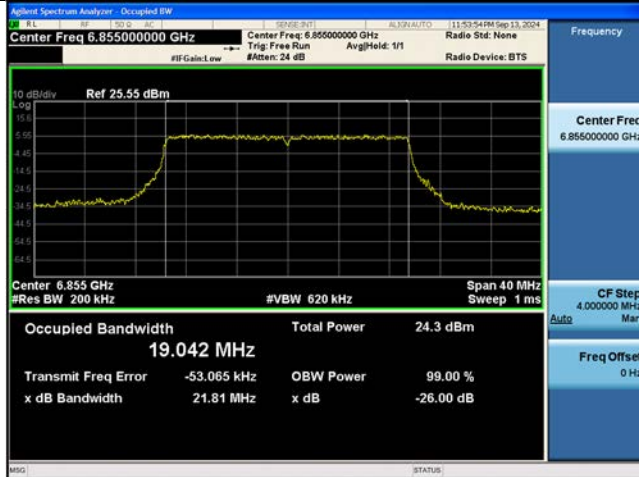

802.11be EHT40M Ch.147(6685 MHz) SU

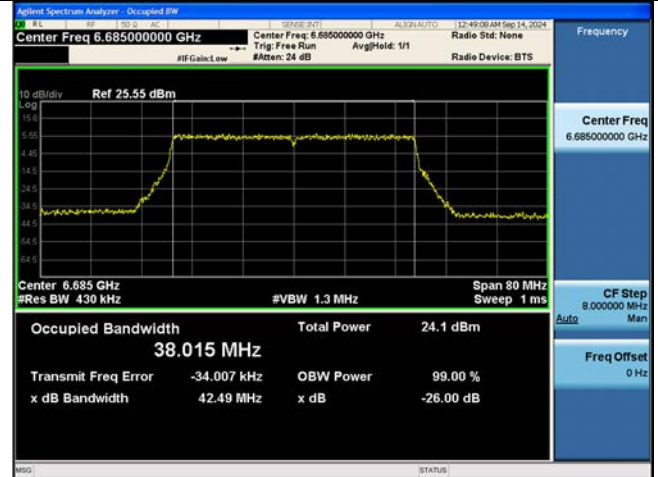


802.11be EHT80M Ch.7(5985 MHz) 996 Tones 67 RU

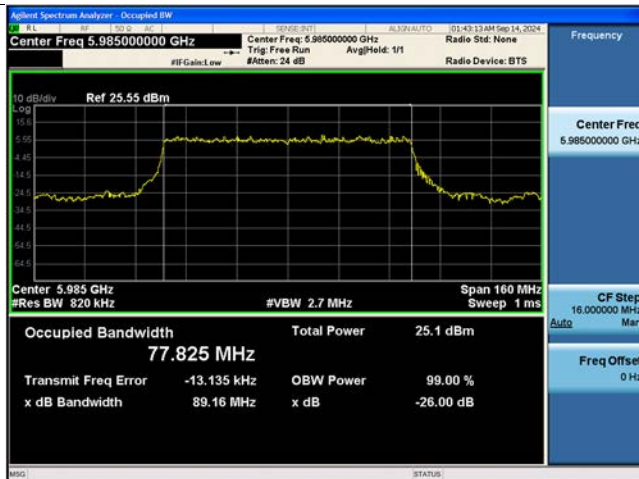


802.11be EHT160M Ch.143(6665 MHz) 2x996 Tones 68 RU



Bandwidth 320M, Ch. 31(6105 MHz) 4x996 Tones 69 RU

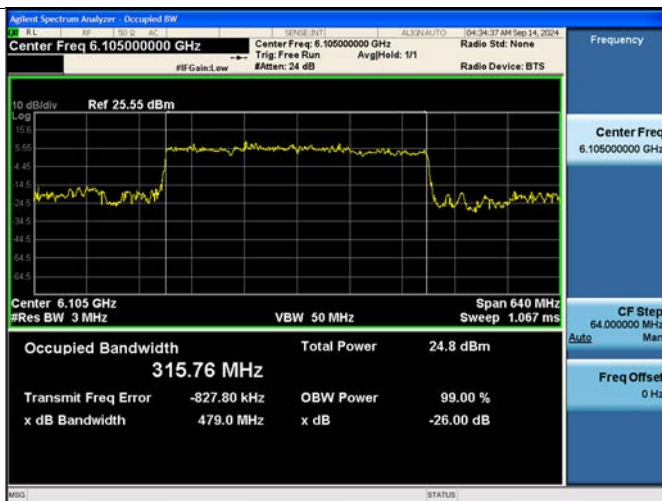

802.11a Ch.117(6535 MHz)

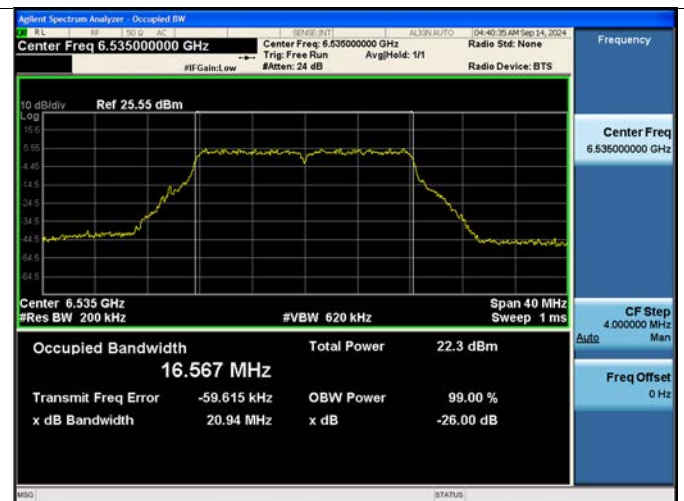


[Ant.2]


802.11be EHT20M Ch.93(6415 MHz) SU



802.11be EHT40M Ch.3(5965 MHz) SU

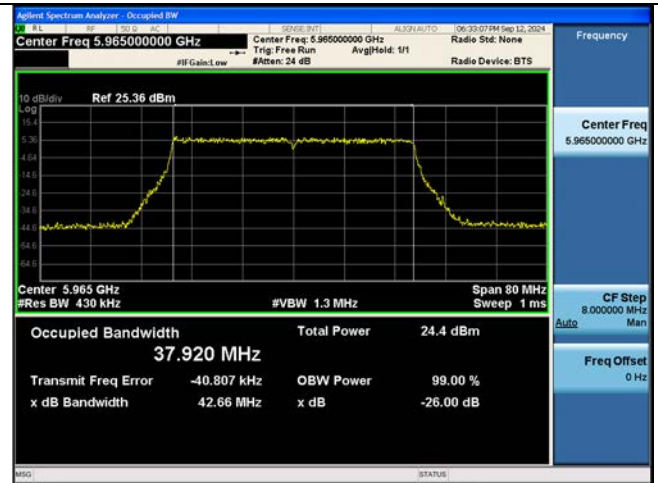


802.11be EHT80M Ch.151(6705 MHz) SU

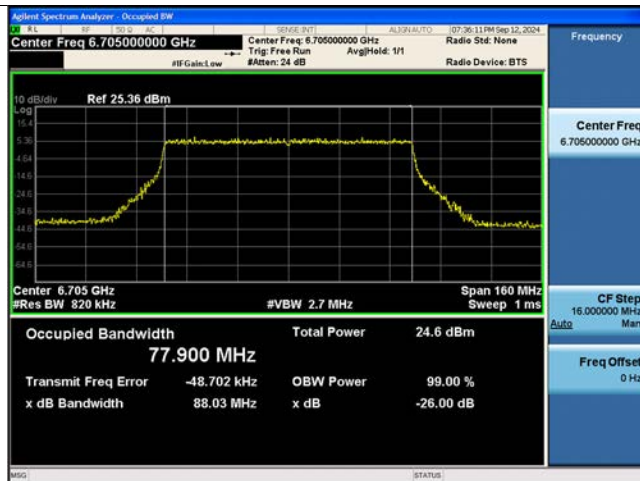


802.11be EHT160M Ch.15(6025 MHz) 2x996 Tones 68 RU



Bandwidth 320M, Ch. 63(6265 MHz) SU

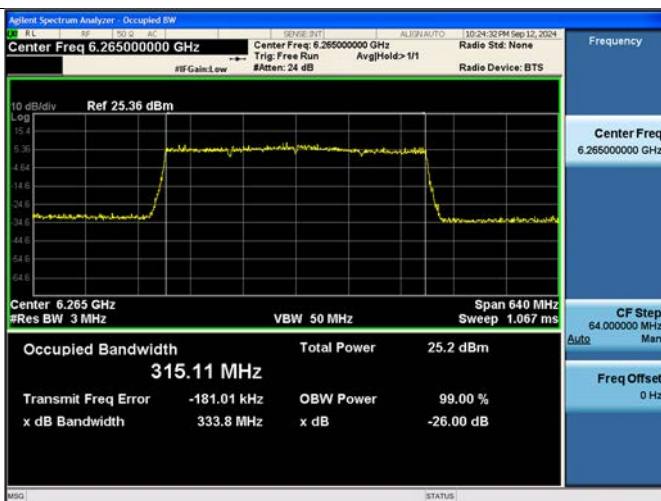

802.11a Ch.2(5935 MHz)

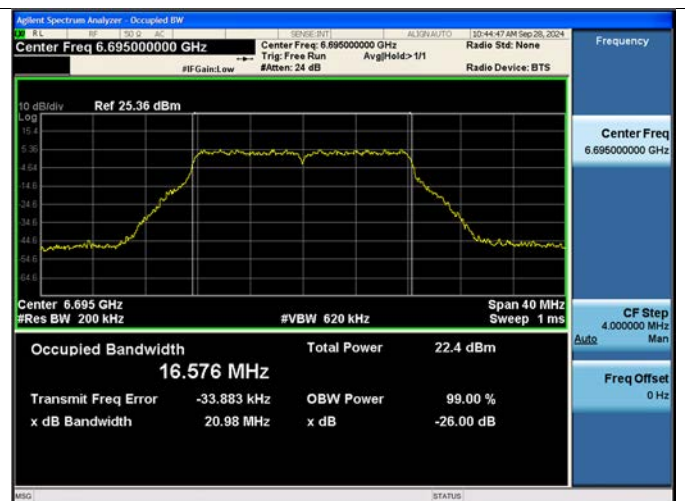


[Very Low Power Device]


Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]


802.11be EHT20M Ch.93(6415 MHz) SU

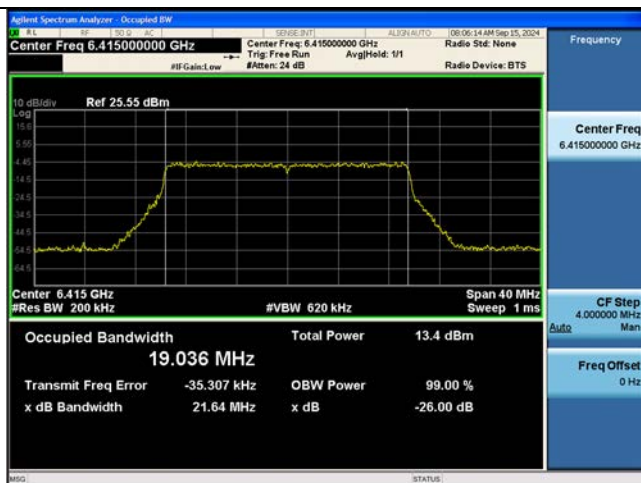


802.11be EHT40M Ch.3(5965 MHz) SU

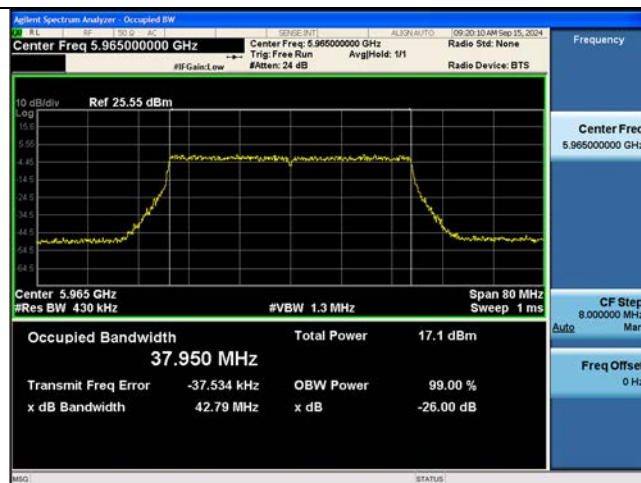


802.11be EHT80M Ch.167(6785 MHz) SU

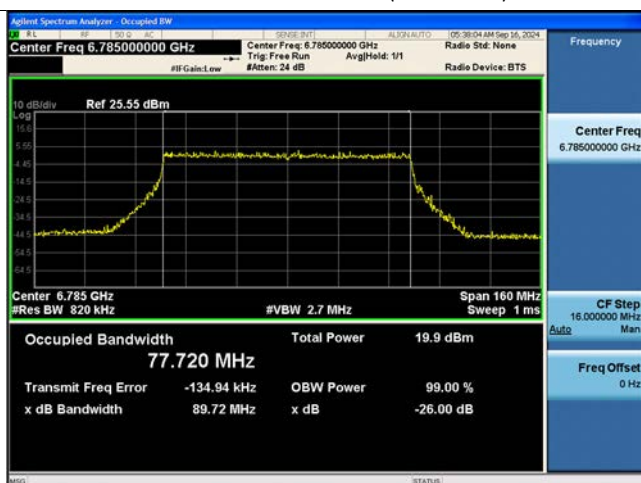


802.11be EHT160M Ch.15(6025 MHz) SU

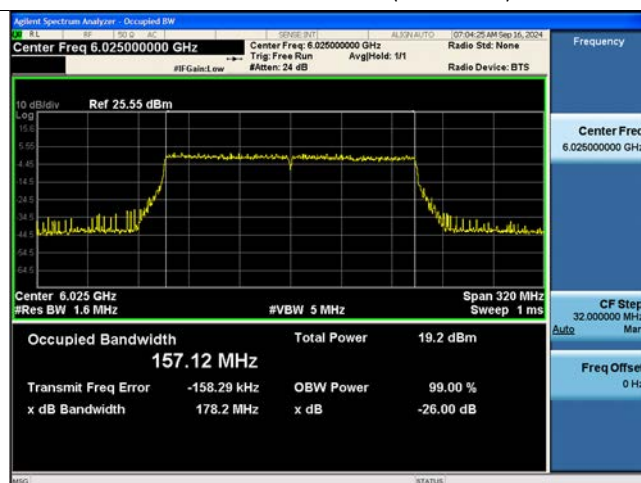

Bandwidth 320M, Ch. 31(6105 MHz) SU

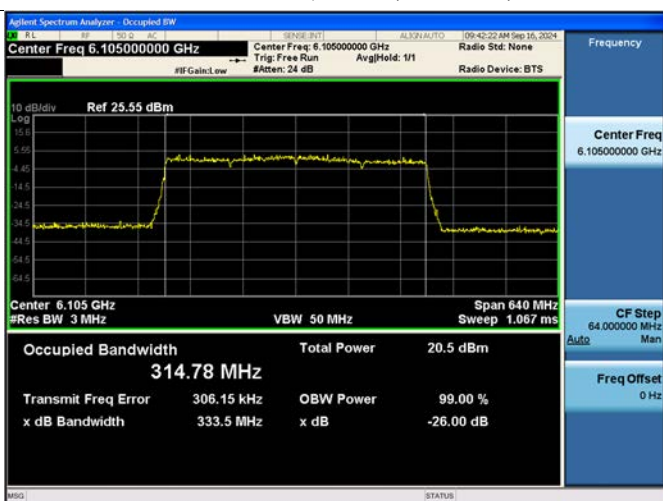


802.11a Ch.149(6695 MHz)

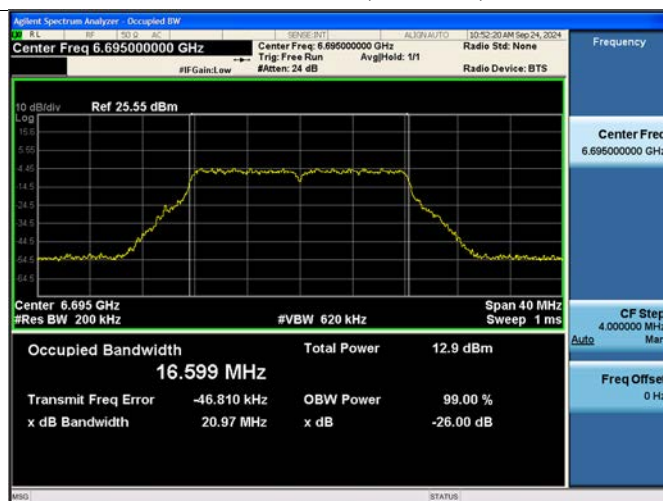


[Ant.2]

802.11be EHT20M Ch.117(6535 MHz) SU

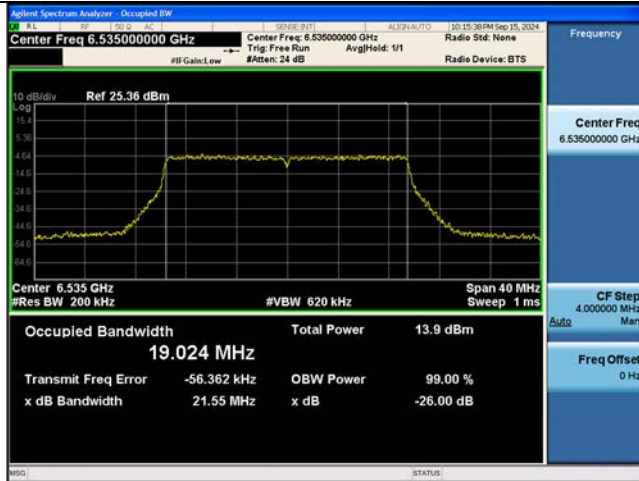


802.11be EHT40M Ch.123(6565 MHz) SU

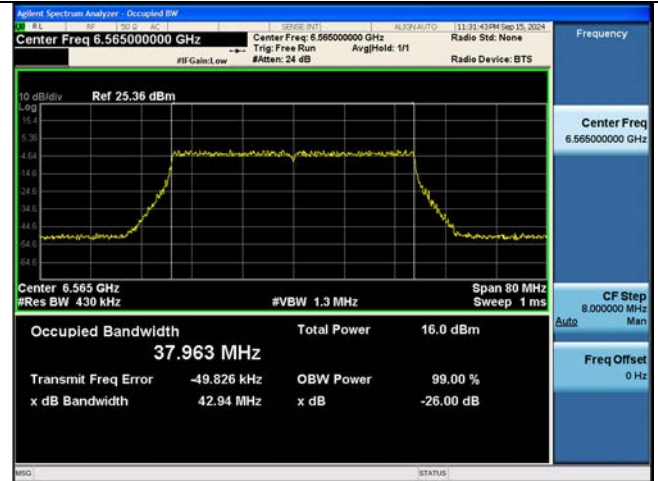


802.11be EHT80M Ch.87(6385 MHz) SU



802.11be EHT160M Ch.47(6185 MHz) SU

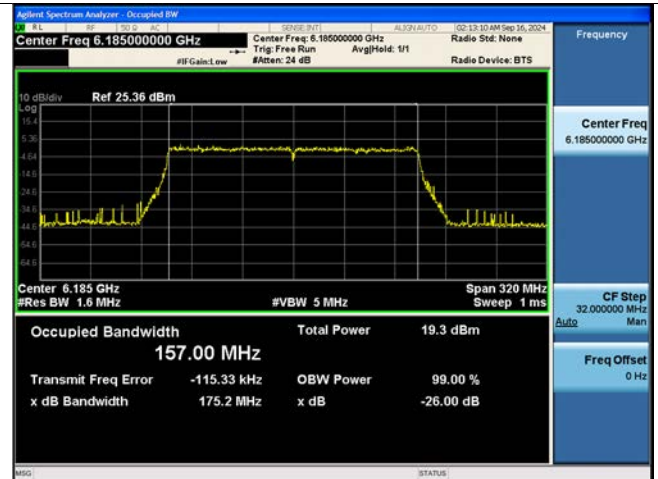

Bandwidth 320M, Ch. 31(6105 MHz) SU

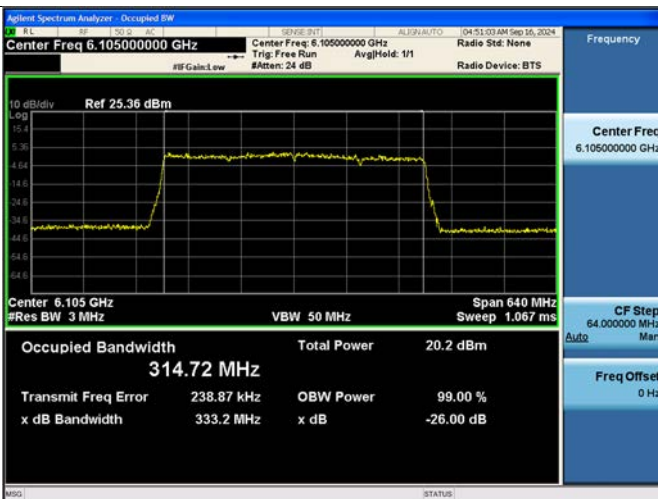

802.11a Ch.93(6415 MHz)



10.3 OUTPUT POWER MEASUREMENT

10.3.1 E.I.R.P Output Power(Indoor client)

Indoor client Limit : 24 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-2.75	-0.74	1.38	-3.14	-0.99	1.08	-2.85	-0.58	1.44	-3.76	-4.02	-0.88	0.56	24
	6175	45	-3.35	-0.26	1.47	-3.77	-0.61	1.10	-3.50	-0.25	1.43	-3.76	-4.02	-0.88	0.59	24
	6415	93	-4.24	-1.41	0.41	-4.52	-1.79	0.07	-4.09	-1.36	0.50	-3.76	-4.02	-0.88	-0.38	24
UNII6	6435	97	-4.04	-1.18	0.63	-4.35	-1.58	0.26	-3.95	-1.30	0.58	-5.82	-5.08	-2.43	-1.80	24
	6475	105	-4.44	-1.10	0.55	-4.67	-1.48	0.22	-4.18	-1.14	0.61	-5.82	-5.08	-2.43	-1.82	24
	6515	113	-3.95	-1.34	0.56	-4.24	-1.73	0.20	-3.83	-1.41	0.56	-5.82	-5.08	-2.43	-1.87	24
	6535	117	-3.96	-0.87	0.86	-4.26	-1.27	0.49	-3.84	-0.95	0.85	-5.82	-5.08	-2.43	-1.57	24
UNII7	6695	149	-4.43	-1.17	0.51	-4.80	-1.49	0.17	-4.45	-1.10	0.55	-5.82	-5.08	-2.43	-1.88	24
	6855	181	-4.24	-0.75	0.86	-4.68	-1.08	0.49	-4.40	-0.74	0.82	-5.82	-5.08	-2.43	-1.57	24
UNII8	6875	185	-4.50	-0.82	0.73	-4.94	-1.15	0.36	-4.68	-0.80	0.69	-5.63	-5.26	-2.43	-1.70	24
	6995	209	-4.39	-0.86	0.74	-4.89	-1.29	0.28	-4.67	-0.98	0.56	-5.63	-5.26	-2.43	-1.69	24
	7115	233	-4.09	-1.09	0.67	-4.58	-1.42	0.29	-4.36	-1.04	0.62	-5.63	-5.26	-2.43	-1.76	24

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	2.15	1.67	4.93	1.91	1.46	4.70	2.02	1.60	4.83	-3.76	-4.02	-0.88	4.05	24
	6175	45	2.36	2.03	5.21	2.15	1.80	4.99	2.31	1.96	5.15	-3.76	-4.02	-0.88	4.33	24
UNII6	6415	93	1.28	2.72	5.07	1.12	2.47	4.86	1.31	2.68	5.06	-3.76	-4.02	-0.88	4.19	24
	6435	97	1.78	2.65	5.25	1.55	2.44	5.03	1.72	2.59	5.19	-5.82	-5.08	-2.43	2.82	24
	6475	105	1.70	2.55	5.16	1.41	2.36	4.92	1.66	2.60	5.16	-5.82	-5.08	-2.43	2.73	24
	6515	113	1.52	2.47	5.03	1.28	2.27	4.81	1.45	2.47	5.00	-5.82	-5.08	-2.43	2.60	24
	6535	117	1.83	2.33	5.10	1.59	2.13	4.88	1.77	2.34	5.07	-5.82	-5.08	-2.43	2.67	24
UNII7	6695	149	2.22	1.95	5.10	2.02	1.77	4.91	2.15	2.03	5.10	-5.82	-5.08	-2.43	2.67	24
	6855	181	2.84	2.46	5.67	2.60	2.30	5.46	2.67	2.61	5.65	-5.82	-5.08	-2.43	3.24	24
UNII8	6875	185	2.31	1.95	5.14	2.08	1.76	4.93	2.17	2.06	5.13	-5.63	-5.26	-2.43	2.71	24
	6995	209	2.63	1.41	5.08	2.37	1.23	4.85	2.39	1.50	4.98	-5.63	-5.26	-2.43	2.65	24
	7115	233	2.55	1.45	5.05	2.32	1.28	4.85	2.46	1.61	5.06	-5.63	-5.26	-2.43	2.63	24

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	4.90	4.80	7.87	-	-	-	4.82	4.76	7.80	-3.76	-4.02	-0.88	6.99	24
	6175	45	5.73	5.08	8.43	-	-	-	5.43	5.02	8.24	-3.76	-4.02	-0.88	7.55	24
UNII6	6415	93	4.55	5.07	7.83	-	-	-	4.57	5.08	7.84	-3.76	-4.02	-0.88	6.96	24
	6435	97	4.87	5.40	8.15	-	-	-	4.84	5.37	8.12	-5.82	-5.08	-2.43	5.72	24
	6475	105	4.75	5.30	8.04	-	-	-	4.79	5.33	8.08	-5.82	-5.08	-2.43	5.65	24
	6515	113	4.81	5.35	8.10	-	-	-	4.75	5.35	8.07	-5.82	-5.08	-2.43	5.67	24
UNII7	6535	117	4.92	5.16	8.05	-	-	-	4.88	5.17	8.04	-5.82	-5.08	-2.43	5.62	24
	6695	149	5.31	4.90	8.12	-	-	-	5.24	4.94	8.10	-5.82	-5.08	-2.43	5.69	24
	6855	181	5.73	5.03	8.41	-	-	-	5.61	5.13	8.39	-5.82	-5.08	-2.43	5.98	24
UNII8	6875	185	5.57	4.74	8.18	-	-	-	5.47	4.83	8.17	-5.63	-5.26	-2.43	5.75	24
	6995	209	5.81	4.49	8.21	-	-	-	5.61	4.55	8.12	-5.63	-5.26	-2.43	5.78	24
	7115	233	5.42	4.46	7.98	-	-	-	5.34	4.58	7.98	-5.63	-5.26	-2.43	5.55	24

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	6.69	6.21	9.47	-	-	-	-3.76	-4.02	-0.88	8.59	24
	6175	45	-	-	-	8.65	8.30	11.49	-	-	-	-3.76	-4.02	-0.88	10.61	24
	6415	93	-	-	-	7.58	8.26	10.95	-	-	-	-3.76	-4.02	-0.88	10.07	24
UNII6	6435	97	-	-	-	8.78	9.83	12.35	-	-	-	-5.82	-5.08	-2.43	9.92	24
	6475	105	-	-	-	8.68	9.81	12.29	-	-	-	-5.82	-5.08	-2.43	9.86	24
	6515	113	-	-	-	8.60	9.72	12.21	-	-	-	-5.82	-5.08	-2.43	9.78	24
UNII7	6535	117	-	-	-	8.87	9.58	12.25	-	-	-	-5.82	-5.08	-2.43	9.82	24
	6695	149	-	-	-	9.38	9.04	12.22	-	-	-	-5.82	-5.08	-2.43	9.79	24
	6855	181	-	-	-	9.80	9.79	12.81	-	-	-	-5.82	-5.08	-2.43	10.38	24
UNII8	6875	185	-	-	-	9.38	8.88	12.15	-	-	-	-5.63	-5.26	-2.43	9.72	24
	6995	209	-	-	-	9.84	9.21	12.55	-	-	-	-5.63	-5.26	-2.43	10.12	24
	7115	233	-	-	-	5.24	4.41	7.86	-	-	-	-5.63	-5.26	-2.43	5.43	24

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5935	2	-	-	-	6.82	6.19	9.53	-	-	-	-3.76	-4.02	-0.88	8.65	24
	6175	45	-	-	-	8.65	8.37	11.52	-	-	-	-3.76	-4.02	-0.88	10.64	24
	6415	93	-	-	-	7.47	8.72	11.15	-	-	-	-3.76	-4.02	-0.88	10.27	24
UNII6	6435	97	-	-	-	8.45	9.45	11.99	-	-	-	-5.82	-5.08	-2.43	9.56	24
	6475	105	-	-	-	8.29	9.44	11.91	-	-	-	-5.82	-5.08	-2.43	9.48	24
	6515	113	-	-	-	8.17	9.35	11.81	-	-	-	-5.82	-5.08	-2.43	9.38	24
UNII7	6535	117	-	-	-	8.47	9.20	11.86	-	-	-	-5.82	-5.08	-2.43	9.43	24
	6695	149	-	-	-	8.97	8.65	11.82	-	-	-	-5.82	-5.08	-2.43	9.39	24
	6855	181	-	-	-	9.41	9.44	12.44	-	-	-	-5.82	-5.08	-2.43	10.01	24
UNII8	6875	185	-	-	-	9.45	9.15	12.31	-	-	-	-5.63	-5.26	-2.43	9.88	24
	6995	209	-	-	-	9.90	9.40	12.67	-	-	-	-5.63	-5.26	-2.43	10.24	24
	7115	233	-	-	-	5.41	4.45	7.96	-	-	-	-5.63	-5.26	-2.43	5.53	24

Mode : EHT40 26T

MODE : E-UTRA 201

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-2.94	-0.55	1.43	-3.23	-0.57	1.31	-3.13	-0.24	1.56	-3.76	-4.02	-0.88	0.68	24
	6165	43	-3.35	-0.13	1.56	-3.63	-0.20	1.43	-3.67	-0.09	1.49	-3.76	-4.02	-0.88	0.68	24
	6405	91	-4.39	-1.08	0.58	-4.37	-1.33	0.42	-4.10	-1.25	0.56	-3.76	-4.02	-0.88	-0.30	24
UNII6	6445	99	-4.04	-1.07	0.71	-4.11	-1.41	0.46	-3.85	-1.47	0.51	-5.82	-5.08	-2.43	-1.72	24
	6485	107	-4.43	-0.98	0.64	-4.33	-1.21	0.51	-4.03	-1.14	0.66	-5.82	-5.08	-2.43	-1.77	24
	6525	115	-3.98	-1.24	0.61	-4.02	-1.50	0.43	-3.77	-1.49	0.53	-5.82	-5.08	-2.43	-1.82	24
UNII7	6565	123	-3.84	-0.95	0.86	-3.85	-1.25	0.65	-3.59	-1.20	0.78	-5.82	-5.08	-2.43	-1.57	24
	6685	147	-4.94	-1.45	0.16	-5.07	-1.63	0.00	-4.93	-1.44	0.17	-5.82	-5.08	-2.43	-2.26	24
	6845	179	-4.16	-0.57	1.01	-4.52	-0.72	0.79	-4.56	-0.56	0.90	-5.82	-5.08	-2.43	-1.42	24
UNII8	6885	187	-4.63	-0.69	0.79	-4.97	-0.87	0.56	-5.02	-0.79	0.60	-5.63	-5.26	-2.43	-1.64	24
	7005	211	-4.65	-0.81	0.70	-4.94	-1.09	0.41	-5.03	-1.08	0.39	-5.63	-5.26	-2.43	-1.73	24
	7085	227	-3.28	-0.53	1.32	-3.85	-0.81	0.94	-4.10	-0.82	0.85	-5.63	-5.26	-2.43	-1.11	24

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	1.84	1.51	4.69	1.66	1.30	4.49	1.79	1.41	4.61	-3.76	-4.02	-0.88	3.81	24
	6165	43	1.87	1.43	4.66	1.59	1.21	4.42	1.65	1.25	4.47	-3.76	-4.02	-0.88	3.78	24
	6405	91	1.36	2.07	4.74	1.23	1.92	4.60	1.40	2.11	4.78	-3.76	-4.02	-0.88	3.90	24
UNII6	6445	99	1.53	2.50	5.05	1.38	2.24	4.84	1.52	2.34	4.96	-5.82	-5.08	-2.43	2.62	24
	6485	107	1.31	2.43	4.91	1.29	2.30	4.84	1.44	2.46	4.99	-5.82	-5.08	-2.43	2.56	24
	6525	115	1.52	2.28	4.93	1.35	2.08	4.74	1.44	2.24	4.87	-5.82	-5.08	-2.43	2.50	24
UNII7	6565	123	1.89	1.83	4.87	1.80	1.62	4.72	1.88	1.75	4.83	-5.82	-5.08	-2.43	2.44	24
	6685	147	1.93	1.91	4.93	1.73	1.69	4.72	1.82	1.93	4.88	-5.82	-5.08	-2.43	2.50	24
	6845	179	2.77	2.29	5.55	2.41	2.19	5.31	2.40	2.47	5.44	-5.82	-5.08	-2.43	3.12	24
UNII8	6885	187	2.26	1.83	5.06	1.92	1.71	4.83	1.92	1.97	4.95	-5.63	-5.26	-2.43	2.63	24
	7005	211	2.63	1.32	5.04	2.15	1.12	4.68	2.12	1.40	4.78	-5.63	-5.26	-2.43	2.61	24
	7085	227	2.72	1.32	5.09	2.30	1.08	4.75	2.19	1.22	4.74	-5.63	-5.26	-2.43	2.66	24

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	5.23	4.62	7.94	5.02	4.40	7.73	5.17	4.56	7.89	-3.76	-4.02	-0.88	7.06	24
	6165	43	5.17	4.81	8.00	4.99	4.62	7.82	4.98	4.66	7.84	-3.76	-4.02	-0.88	7.12	24
	6405	91	4.62	5.14	7.90	4.50	5.01	7.77	4.68	5.18	7.94	-3.76	-4.02	-0.88	7.06	24
UNII6	6445	99	4.86	5.36	8.13	4.70	5.18	7.96	4.88	5.21	8.06	-5.82	-5.08	-2.43	5.70	24
	6485	107	4.62	5.26	7.96	4.50	5.12	7.83	4.77	5.30	8.05	-5.82	-5.08	-2.43	5.62	24
	6525	115	4.89	5.19	8.05	4.66	5.05	7.87	4.83	5.16	8.01	-5.82	-5.08	-2.43	5.62	24
UNII7	6565	123	5.20	4.77	8.00	5.02	4.60	7.83	5.25	4.70	7.99	-5.82	-5.08	-2.43	5.57	24
	6685	147	5.23	4.90	8.08	5.06	4.76	7.92	5.13	4.90	8.03	-5.82	-5.08	-2.43	5.65	24
	6845	179	5.83	4.94	8.42	5.53	4.86	8.22	5.54	5.10	8.34	-5.82	-5.08	-2.43	5.99	24
UNII8	6885	187	5.78	4.70	8.28	5.51	4.63	8.10	5.45	4.81	8.15	-5.63	-5.26	-2.43	5.85	24
	7005	211	5.94	4.45	8.27	5.61	4.35	8.04	5.49	4.51	8.04	-5.63	-5.26	-2.43	5.84	24
	7085	227	5.90	4.73	8.36	5.60	4.63	8.15	5.50	4.67	8.11	-5.63	-5.26	-2.43	5.93	24

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	8.31	7.77	11.06	-	-	-	8.29	7.81	11.06	-3.76	-4.02	-0.88	10.18	24
	6165	43	8.11	7.75	10.95	-	-	-	8.00	7.67	10.84	-3.76	-4.02	-0.88	10.07	24
	6405	91	7.66	8.21	10.96	-	-	-	7.71	8.24	10.99	-3.76	-4.02	-0.88	10.11	24
UNII6	6445	99	8.78	9.76	12.31	-	-	-	8.79	9.66	12.26	-5.82	-5.08	-2.43	9.88	24
	6485	107	8.45	9.73	12.15	-	-	-	8.59	9.75	12.22	-5.82	-5.08	-2.43	9.79	24
	6525	115	8.76	9.56	12.19	-	-	-	8.76	9.51	12.16	-5.82	-5.08	-2.43	9.76	24
UNII7	6565	123	9.08	9.06	12.08	-	-	-	9.17	9.00	12.10	-5.82	-5.08	-2.43	9.67	24
	6685	147	9.19	8.97	12.09	-	-	-	9.13	8.96	12.05	-5.82	-5.08	-2.43	9.66	24
	6845	179	9.83	9.66	12.76	-	-	-	9.66	9.73	12.71	-5.82	-5.08	-2.43	10.33	24
UNII8	6885	187	9.43	8.81	12.14	-	-	-	9.24	8.86	12.06	-5.63	-5.26	-2.43	9.71	24
	7005	211	9.44	8.54	12.02	-	-	-	9.19	8.56	11.90	-5.63	-5.26	-2.43	9.59	24
	7085	227	9.61	8.92	12.29	-	-	-	9.36	8.83	12.11	-5.63	-5.26	-2.43	9.86	24

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	11.18	10.76	13.98	-	-	-	-3.76	-4.02	-0.88	13.10	24
	6165	43	-	-	-	11.11	10.96	14.05	-	-	-	-3.76	-4.02	-0.88	13.17	24
	6405	91	-	-	-	10.70	11.29	14.02	-	-	-	-3.76	-4.02	-0.88	13.14	24
UNII6	6445	99	-	-	-	11.85	12.57	15.23	-	-	-	-5.82	-5.08	-2.43	12.80	24
	6485	107	-	-	-	11.70	12.48	15.12	-	-	-	-5.82	-5.08	-2.43	12.69	24
	6525	115	-	-	-	11.82	12.33	15.09	-	-	-	-5.82	-5.08	-2.43	12.66	24
UNII7	6565	123	-	-	-	12.26	11.86	15.07	-	-	-	-5.82	-5.08	-2.43	12.64	24
	6685	147	-	-	-	12.17	11.98	15.09	-	-	-	-5.82	-5.08	-2.43	12.66	24
	6845	179	-	-	-	12.69	12.10	15.42	-	-	-	-5.82	-5.08	-2.43	12.99	24
UNII8	6885	187	-	-	-	12.32	11.99	15.17	-	-	-	-5.63	-5.26	-2.43	12.74	24
	7005	211	-	-	-	12.70	12.06	15.40	-	-	-	-5.63	-5.26	-2.43	12.97	24
	7085	227	-	-	-	12.35	11.86	15.12	-	-	-	-5.63	-5.26	-2.43	12.69	24

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	11.37	11.03	14.21	-	-	-	-3.76	-4.02	-0.88	13.33	24
	6165	43	-	-	-	11.32	11.20	14.27	-	-	-	-3.76	-4.02	-0.88	13.39	24
	6405	91	-	-	-	10.40	10.99	13.72	-	-	-	-3.76	-4.02	-0.88	12.84	24
UNII6	6445	99	-	-	-	11.49	12.24	14.89	-	-	-	-5.82	-5.08	-2.43	12.46	24
	6485	107	-	-	-	11.36	12.17	14.80	-	-	-	-5.82	-5.08	-2.43	12.37	24
	6525	115	-	-	-	11.43	12.01	14.74	-	-	-	-5.82	-5.08	-2.43	12.31	24
UNII7	6565	123	-	-	-	11.88	11.54	14.72	-	-	-	-5.82	-5.08	-2.43	12.29	24
	6685	147	-	-	-	11.85	11.69	14.78	-	-	-	-5.82	-5.08	-2.43	12.35	24
	6845	179	-	-	-	12.38	11.81	15.12	-	-	-	-5.82	-5.08	-2.43	12.69	24
UNII8	6885	187	-	-	-	12.40	12.14	15.28	-	-	-	-5.63	-5.26	-2.43	12.85	24
	7005	211	-	-	-	12.76	12.26	15.53	-	-	-	-5.63	-5.26	-2.43	13.10	24
	7085	227	-	-	-	12.44	12.05	15.26	-	-	-	-5.63	-5.26	-2.43	12.83	24

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-3.24	-1.00	1.03	-3.56	-0.72	1.10	-3.72	-0.37	1.28	-3.76	-4.02	-0.88	0.40	24
	6145	39	-3.67	-0.73	1.06	-4.04	-0.58	1.04	-4.38	-0.57	0.94	-3.76	-4.02	-0.88	0.18	24
	6385	87	-5.09	-1.16	0.32	-4.87	-1.58	0.09	-4.54	-1.67	0.14	-3.76	-4.02	-0.88	-0.56	24
UNII6	6465	103	-4.46	-1.56	0.24	-4.32	-2.06	-0.04	-3.85	-2.19	0.07	-5.82	-5.08	-2.43	-2.19	24
	6545	119	-4.52	-1.11	0.52	-4.34	-1.45	0.35	-4.06	-1.64	0.33	-5.82	-5.08	-2.43	-1.91	24
UNII7	6625	135	-4.03	-0.52	1.08	-3.98	-0.36	1.20	-3.72	-0.30	1.33	-5.82	-5.08	-2.43	-1.10	24
	6705	151	-5.31	-1.98	-0.32	-5.44	-2.03	-0.40	-5.56	-1.88	-0.33	-5.82	-5.08	-2.43	-2.75	24
	6785	167	-4.75	-1.12	0.44	-4.96	-1.12	0.38	-5.18	-1.07	0.36	-5.82	-5.08	-2.43	-1.99	24
UNII8	6865	183	-4.56	-1.10	0.51	-5.13	-1.16	0.31	-5.50	-1.27	0.12	-5.63	-5.26	-2.43	-1.92	24
	6945	199	-4.33	-1.09	0.60	-5.09	-1.42	0.13	-5.53	-1.45	-0.02	-5.63	-5.26	-2.43	-1.83	24
	7025	215	-4.00	-0.92	0.82	-4.71	-1.30	0.33	-5.27	-1.53	0.00	-5.63	-5.26	-2.43	-1.61	24

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	1.78	0.98	4.41	1.72	1.00	4.39	1.67	0.92	4.32	-3.76	-4.02	-0.88	3.53	24
	6145	39	1.79	1.06	4.45	1.63	1.00	4.34	1.41	0.82	4.13	-3.76	-4.02	-0.88	3.57	24
	6385	87	0.64	1.35	4.02	0.66	1.22	3.96	0.77	1.24	4.02	-3.76	-4.02	-0.88	3.14	24
UNII6	6465	103	1.38	2.60	5.04	1.40	2.34	4.91	1.52	2.38	4.98	-5.82	-5.08	-2.43	2.61	24
	6545	119	1.73	2.06	4.91	1.73	1.92	4.83	1.76	1.81	4.80	-5.82	-5.08	-2.43	2.48	24
UNII7	6625	135	1.99	1.65	4.83	2.05	1.86	4.97	2.09	2.02	5.07	-5.82	-5.08	-2.43	2.64	24
	6705	151	2.03	1.61	4.84	1.98	1.63	4.82	1.76	1.83	4.80	-5.82	-5.08	-2.43	2.41	24
	6785	167	2.12	1.40	4.78	2.04	1.50	4.79	1.79	1.65	4.73	-5.82	-5.08	-2.43	2.36	24
UNII8	6865	183	2.44	1.64	5.07	2.02	1.75	4.90	1.66	1.89	4.79	-5.63	-5.26	-2.43	2.64	24
	6945	199	2.69	1.38	5.10	2.03	1.32	4.70	1.63	1.43	4.54	-5.63	-5.26	-2.43	2.67	24
	7025	215	2.60	0.81	4.81	1.96	0.76	4.41	1.50	0.78	4.16	-5.63	-5.26	-2.43	2.38	24

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	5.16	4.34	7.78	5.09	4.32	7.73	5.09	4.31	7.73	-3.76	-4.02	-0.88	6.90	24
	6145	39	5.15	4.58	7.89	5.01	4.54	7.79	4.80	4.38	7.60	-3.76	-4.02	-0.88	7.01	24
	6385	87	4.48	5.07	7.80	4.56	4.88	7.73	4.63	4.95	7.80	-3.76	-4.02	-0.88	6.92	24
UNII6	6465	103	4.75	5.42	8.11	4.77	5.16	7.98	4.95	5.19	8.08	-5.82	-5.08	-2.43	5.68	24
	6545	119	5.14	4.99	8.08	5.03	4.91	7.98	5.08	4.83	7.97	-5.82	-5.08	-2.43	5.65	24
UNII7	6625	135	5.28	4.67	8.00	5.32	4.90	8.12	5.38	5.03	8.22	-5.82	-5.08	-2.43	5.79	24
	6705	151	5.25	4.75	8.02	5.16	4.74	7.97	5.01	4.93	7.98	-5.82	-5.08	-2.43	5.59	24
	6785	167	5.34	4.53	7.96	5.23	4.61	7.94	5.03	4.77	7.91	-5.82	-5.08	-2.43	5.53	24
UNII8	6865	183	5.85	4.56	8.27	5.45	4.69	8.10	5.14	4.79	7.98	-5.63	-5.26	-2.43	5.84	24
	6945	199	5.91	4.21	8.15	5.24	4.17	7.75	4.92	4.30	7.63	-5.63	-5.26	-2.43	5.72	24
	7025	215	5.87	3.92	8.02	5.28	3.87	7.65	4.90	3.89	7.44	-5.63	-5.26	-2.43	5.59	24

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	8.11	7.81	10.97	8.14	7.83	11.00	8.14	7.86	11.01	-3.76	-4.02	-0.88	10.13	24
	6145	39	7.94	7.82	10.89	7.89	7.79	10.85	7.66	7.69	10.68	-3.76	-4.02	-0.88	10.01	24
	6385	87	7.61	8.33	11.00	7.61	8.22	10.94	7.72	8.22	10.99	-3.76	-4.02	-0.88	10.12	24
UNII6	6465	103	8.14	9.32	11.78	8.16	9.25	11.75	8.33	9.16	11.77	-5.82	-5.08	-2.43	9.35	24
	6545	119	9.08	9.47	12.29	9.10	9.44	12.29	9.20	9.29	12.25	-5.82	-5.08	-2.43	9.86	24
UNII7	6625	135	9.35	9.13	12.25	9.41	9.25	12.34	9.50	9.43	12.47	-5.82	-5.08	-2.43	10.04	24
	6705	151	9.46	8.99	12.24	9.42	8.98	12.21	9.26	9.14	12.21	-5.82	-5.08	-2.43	9.81	24
	6785	167	9.51	8.85	12.20	9.46	8.89	12.20	9.28	9.00	12.15	-5.82	-5.08	-2.43	9.77	24
UNII8	6865	183	9.68	8.77	12.26	9.50	8.85	12.20	9.10	8.91	12.02	-5.63	-5.26	-2.43	9.83	24
	6945	199	9.60	8.47	12.08	9.30	8.46	11.91	8.80	8.46	11.64	-5.63	-5.26	-2.43	9.65	24
	7025	215	9.95	8.63	12.35	9.60	8.51	12.10	9.11	8.53	11.84	-5.63	-5.26	-2.43	9.92	24

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	10.98	10.79	13.89	-	-	-	11.01	10.83	13.93	-3.76	-4.02	-0.88	13.05	24
	6145	39	10.86	10.90	13.89	-	-	-	10.70	10.84	13.78	-3.76	-4.02	-0.88	13.01	24
	6385	87	10.56	11.20	13.90	-	-	-	10.68	11.15	13.93	-3.76	-4.02	-0.88	13.05	24
UNII6	6465	103	11.80	12.63	15.24	-	-	-	11.92	12.51	15.24	-5.82	-5.08	-2.43	12.81	24
	6545	119	12.09	12.28	15.20	-	-	-	12.13	12.15	15.15	-5.82	-5.08	-2.43	12.77	24
UNII7	6625	135	12.43	11.91	15.19	-	-	-	12.52	12.14	15.34	-5.82	-5.08	-2.43	12.91	24
	6705	151	12.34	11.93	15.15	-	-	-	12.22	12.04	15.14	-5.82	-5.08	-2.43	12.72	24
	6785	167	12.42	11.73	15.10	-	-	-	12.26	11.84	15.06	-5.82	-5.08	-2.43	12.67	24
UNII8	6865	183	12.55	11.88	15.24	-	-	-	12.13	12.01	15.08	-5.63	-5.26	-2.43	12.81	24
	6945	199	12.26	11.61	14.96	-	-	-	11.64	11.60	14.63	-5.63	-5.26	-2.43	12.53	24
	7025	215	12.68	11.58	15.18	-	-	-	12.14	11.56	14.87	-5.63	-5.26	-2.43	12.75	24

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	14.56	14.23	17.41	-	-	-	-3.76	-4.02	-0.88	16.53	24
	6145	39	-	-	-	14.45	14.24	17.35	-	-	-	-3.76	-4.02	-0.88	16.47	24
	6385	87	-	-	-	14.08	14.69	17.40	-	-	-	-3.76	-4.02	-0.88	16.52	24
UNII6	6465	103	-	-	-	14.69	15.39	18.07	-	-	-	-5.82	-5.08	-2.43	15.64	24
	6545	119	-	-	-	14.99	14.99	18.00	-	-	-	-5.82	-5.08	-2.43	15.57	24
UNII7	6625	135	-	-	-	15.31	14.91	18.13	-	-	-	-5.82	-5.08	-2.43	15.70	24
	6705	151	-	-	-	15.10	14.89	18.01	-	-	-	-5.82	-5.08	-2.43	15.58	24
	6785	167	-	-	-	15.26	14.83	18.06	-	-	-	-5.82	-5.08	-2.43	15.63	24
UNII8	6865	183	-	-	-	15.15	14.74	17.96	-	-	-	-5.63	-5.26	-2.43	15.53	24
	6945	199	-	-	-	15.21	14.80	18.02	-	-	-	-5.63	-5.26	-2.43	15.59	24
	7025	215	-	-	-	15.05	15.08	18.07	-	-	-	-5.63	-5.26	-2.43	15.64	24

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	14.27	13.75	17.03	-	-	-	-3.76	-4.02	-0.88	16.15	24
	6145	39	-	-	-	14.09	13.72	16.92	-	-	-	-3.76	-4.02	-0.88	16.04	24
	6385	87	-	-	-	13.70	14.42	17.09	-	-	-	-3.76	-4.02	-0.88	16.21	24
UNII6	6465	103	-	-	-	14.47	15.17	17.84	-	-	-	-5.82	-5.08	-2.43	15.41	24
	6545	119	-	-	-	14.77	14.72	17.76	-	-	-	-5.82	-5.08	-2.43	15.33	24
UNII7	6625	135	-	-	-	15.11	14.65	17.90	-	-	-	-5.82	-5.08	-2.43	15.47	24
	6705	151	-	-	-	14.87	14.66	17.78	-	-	-	-5.82	-5.08	-2.43	15.35	24
	6785	167	-	-	-	15.04	14.58	17.82	-	-	-	-5.82	-5.08	-2.43	15.39	24
UNII8	6865	183	-	-	-	15.39	15.07	18.24	-	-	-	-5.63	-5.26	-2.43	15.81	24
	6945	199	-	-	-	15.51	15.10	18.32	-	-	-	-5.63	-5.26	-2.43	15.89	24
	7025	215	-	-	-	15.37	15.22	18.31	-	-	-	-5.63	-5.26	-2.43	15.88	24

Mode : EHT160(80L) 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-3.64	-1.84	0.36	-3.27	-1.12	0.95	-3.33	-0.71	1.18	-3.76	-4.02	-0.88	0.30	24
	6185	47	-4.03	-1.30	0.56	-3.92	-0.74	0.97	-4.17	-0.67	0.94	-3.76	-4.02	-0.88	0.09	24
	6345	79	-4.88	-1.61	0.07	-4.63	-1.45	0.26	-4.60	-1.51	0.22	-3.76	-4.02	-0.88	-0.62	24
UNII6	6505	111	-5.38	-1.40	0.06	-4.83	-1.50	0.16	-4.41	-1.63	0.21	-5.82	-5.08	-2.43	-2.22	24
UNII7	6665	143	-4.41	-0.97	0.65	-3.88	-0.45	1.18	-3.70	-0.31	1.33	-5.82	-5.08	-2.43	-1.10	24
UNII8	6825	175	-5.07	-1.64	-0.02	-4.84	-1.19	0.37	-5.09	-1.07	0.38	-5.63	-5.26	-2.43	-2.05	24
	6985	207	-4.19	-1.00	0.70	-4.49	-1.03	0.59	-4.89	-1.18	0.36	-5.63	-5.26	-2.43	-1.73	24

Mode : EHT160(80L) 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.84	1.33	4.60	2.00	1.57	4.80	2.00	1.58	4.81	-3.76	-4.02	-0.88	3.93	24
	6185	47	2.04	1.81	4.94	2.06	1.90	4.99	1.88	1.75	4.83	-3.76	-4.02	-0.88	4.11	24
	6345	79	1.78	2.29	5.05	1.75	2.28	5.03	1.70	2.31	5.03	-3.76	-4.02	-0.88	4.17	24
UNII6	6505	111	0.85	2.34	4.67	0.95	2.22	4.64	1.10	2.24	4.72	-5.82	-5.08	-2.43	2.29	24
UNII7	6665	143	1.58	0.85	4.24	1.76	1.22	4.51	1.85	1.40	4.64	-5.82	-5.08	-2.43	2.21	24
UNII8	6825	175	2.03	1.27	4.67	2.10	1.50	4.82	1.86	1.70	4.79	-5.63	-5.26	-2.43	2.39	24
	6985	207	2.71	0.46	4.74	2.16	0.52	4.42	1.78	0.69	4.28	-5.63	-5.26	-2.43	2.31	24

Mode : EHT160(80L) 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	5.47	5.00	8.25	5.55	5.21	8.40	5.60	5.25	8.44	-3.76	-4.02	-0.88	7.56	24
	6185	47	5.64	5.13	8.40	5.61	5.20	8.42	5.43	5.09	8.27	-3.76	-4.02	-0.88	7.54	24
	6345	79	5.37	5.53	8.46	5.29	5.49	8.40	5.26	5.50	8.39	-3.76	-4.02	-0.88	7.58	24
UNII6	6505	111	4.49	5.46	8.01	4.60	5.30	7.97	4.72	5.34	8.05	-5.82	-5.08	-2.43	5.62	24
UNII7	6665	143	5.01	4.08	7.58	5.20	4.41	7.83	5.21	4.47	7.87	-5.82	-5.08	-2.43	5.44	24
UNII8	6825	175	5.44	3.82	7.72	5.45	4.02	7.80	5.29	4.21	7.79	-5.63	-5.26	-2.43	5.37	24
	6985	207	5.74	3.23	7.68	5.13	3.21	7.29	4.80	3.35	7.14	-5.63	-5.26	-2.43	5.25	24

Mode : EHT160(80L) 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	7.91	7.77	10.85	7.99	7.87	10.94	8.07	7.99	11.04	-3.76	-4.02	-0.88	10.16	24
	6185	47	8.23	7.91	11.08	8.17	7.86	11.03	8.02	7.87	10.95	-3.76	-4.02	-0.88	10.20	24
	6345	79	8.43	8.51	11.48	8.32	8.42	11.38	8.28	8.47	11.39	-3.76	-4.02	-0.88	10.60	24
UNII6	6505	111	8.29	9.79	12.12	8.29	9.68	12.05	8.49	9.61	12.10	-5.82	-5.08	-2.43	9.69	24
UNII7	6665	143	9.01	8.25	11.66	9.06	8.40	11.75	9.22	8.61	11.94	-5.82	-5.08	-2.43	9.51	24
UNII8	6825	175	9.37	8.10	11.79	9.37	8.18	11.83	9.20	8.35	11.81	-5.63	-5.26	-2.43	9.40	24
	6985	207	9.71	7.96	11.93	9.40	7.96	11.75	8.90	7.98	11.47	-5.63	-5.26	-2.43	9.50	24

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	11.48	11.36	14.43	-	-	-	11.63	11.50	14.58	-3.76	-4.02	-0.88	13.70	24
	6185	47	11.58	11.54	14.57	-	-	-	11.49	11.57	14.54	-3.76	-4.02	-0.88	13.69	24
	6345	79	11.21	11.66	14.45	-	-	-	11.13	11.67	14.42	-3.76	-4.02	-0.88	13.57	24
UNII6	6505	111	11.47	12.63	15.10	-	-	-	11.60	12.50	15.09	-5.82	-5.08	-2.43	12.67	24
UNII7	6665	143	12.17	11.30	14.76	-	-	-	12.29	11.56	14.95	-5.82	-5.08	-2.43	12.52	24
UNII8	6825	175	12.44	11.38	14.95	-	-	-	12.33	11.53	14.96	-5.63	-5.26	-2.43	12.53	24
	6985	207	12.50	10.93	14.79	-	-	-	11.92	10.91	14.45	-5.63	-5.26	-2.43	12.36	24

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	14.53	14.37	17.46	-	-	-	-3.76	-4.02	-0.88	16.58	24
	6185	47	-	-	-	14.48	14.35	17.43	-	-	-	-3.76	-4.02	-0.88	16.55	24
	6345	79	-	-	-	14.12	14.63	17.39	-	-	-	-3.76	-4.02	-0.88	16.51	24
UNII6	6505	111	-	-	-	14.40	15.40	17.94	-	-	-	-5.82	-5.08	-2.43	15.51	24
UNII7	6665	143	-	-	-	15.13	14.59	17.88	-	-	-	-5.82	-5.08	-2.43	15.45	24
UNII8	6825	175	-	-	-	15.33	14.27	17.84	-	-	-	-5.63	-5.26	-2.43	15.41	24
	6985	207	-	-	-	12.48	11.41	14.99	-	-	-	-5.63	-5.26	-2.43	12.56	24

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-3.19	-0.78	1.19	-3.45	-0.41	1.34	-4.14	-0.59	1.00	-3.76	-4.02	-0.88	0.46	24
	6185	47	-4.24	-0.70	0.89	-4.52	-0.87	0.69	-5.10	-1.46	0.10	-3.76	-4.02	-0.88	0.01	24
	6345	79	-4.69	-1.55	0.17	-4.38	-1.97	0.00	-4.34	-2.40	-0.25	-3.76	-4.02	-0.88	-0.71	24
UNII6	6505	111	-4.44	-1.70	0.15	-4.23	-2.03	0.02	-4.22	-2.52	-0.28	-5.82	-5.08	-2.43	-2.28	24
UNII7	6665	143	-3.68	-0.33	1.32	-3.74	-0.36	1.28	-4.19	-0.55	1.01	-5.82	-5.08	-2.43	-1.11	24
UNII8	6825	175	-5.15	-1.08	0.35	-5.63	-1.17	0.16	-6.29	-1.63	-0.35	-5.63	-5.26	-2.43	-2.08	24
	6985	207	-4.99	-1.29	0.26	-5.62	-1.70	-0.22	-6.45	-2.23	-0.84	-5.63	-5.26	-2.43	-2.17	24

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	2.03	1.65	4.86	1.95	1.63	4.80	1.72	1.44	4.59	-3.76	-4.02	-0.88	3.98	24
	6185	47	2.31	2.29	5.31	2.14	2.22	5.19	1.81	1.98	4.90	-3.76	-4.02	-0.88	4.43	24
	6345	79	1.65	2.21	4.95	1.77	2.11	4.95	1.72	2.00	4.87	-3.76	-4.02	-0.88	4.07	24
UNII6	6505	111	1.21	2.15	4.71	1.25	2.09	4.70	1.16	1.85	4.53	-5.82	-5.08	-2.43	2.28	24
UNII7	6665	143	1.93	1.24	4.61	1.89	1.28	4.60	1.57	1.41	4.50	-5.82	-5.08	-2.43	2.18	24
UNII8	6825	175	2.37	1.91	5.15	2.03	2.16	5.10	1.54	2.14	4.86	-5.63	-5.26	-2.43	2.72	24
	6985	207	2.52	1.65	5.12	1.93	1.66	4.80	1.38	1.53	4.47	-5.63	-5.26	-2.43	2.69	24

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	5.61	5.23	8.43	5.54	5.22	8.39	5.33	5.07	8.21	-3.76	-4.02	-0.88	7.55	24
	6185	47	5.77	5.27	8.54	5.60	5.21	8.42	5.32	4.99	8.17	-3.76	-4.02	-0.88	7.66	24
	6345	79	5.18	5.28	8.24	5.30	5.19	8.26	5.29	5.14	8.23	-3.76	-4.02	-0.88	7.38	24
UNII6	6505	111	4.74	5.12	7.95	4.79	5.02	7.92	4.74	5.00	7.88	-5.82	-5.08	-2.43	5.52	24
UNII7	6665	143	5.27	4.48	7.90	5.23	4.56	7.92	4.97	4.65	7.82	-5.82	-5.08	-2.43	5.49	24
UNII8	6825	175	5.37	4.78	8.10	4.99	4.94	7.97	4.59	4.94	7.78	-5.63	-5.26	-2.43	5.67	24
	6985	207	5.98	4.78	8.44	5.47	4.79	8.15	5.01	4.73	7.89	-5.63	-5.26	-2.43	6.01	24

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	8.02	7.96	11.00	7.98	7.94	10.97	7.84	7.88	10.87	-3.76	-4.02	-0.88	10.12	24
	6185	47	7.88	7.78	10.84	7.75	7.72	10.75	7.51	7.57	10.55	-3.76	-4.02	-0.88	9.96	24
	6345	79	8.15	8.34	11.26	8.18	8.24	11.22	8.31	8.27	11.30	-3.76	-4.02	-0.88	10.42	24
UNII6	6505	111	8.43	9.52	12.02	8.41	9.47	11.98	8.51	9.33	11.95	-5.82	-5.08	-2.43	9.59	24
UNII7	6665	143	9.14	8.56	11.87	9.11	8.54	11.85	8.95	8.73	11.85	-5.82	-5.08	-2.43	9.44	24
UNII8	6825	175	9.45	9.20	12.34	9.26	9.27	12.28	8.83	9.35	12.11	-5.63	-5.26	-2.43	9.91	24
	6985	207	9.56	9.04	12.32	9.25	9.01	12.14	8.78	8.99	11.90	-5.63	-5.26	-2.43	9.89	24

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	11.49	11.45	14.48	-	-	-	11.38	11.41	14.41	-3.76	-4.02	-0.88	13.60	24
	6185	47	11.79	11.74	14.78	-	-	-	11.53	11.61	14.58	-3.76	-4.02	-0.88	13.90	24
	6345	79	11.14	11.48	14.32	-	-	-	11.22	11.44	14.34	-3.76	-4.02	-0.88	13.46	24
UNII6	6505	111	11.58	12.36	15.00	-	-	-	11.63	12.24	14.96	-5.82	-5.08	-2.43	12.57	24
UNII7	6665	143	12.19	11.46	14.85	-	-	-	12.08	11.59	14.85	-5.82	-5.08	-2.43	12.42	24
UNII8	6825	175	12.37	11.84	15.13	-	-	-	11.96	11.95	14.97	-5.63	-5.26	-2.43	12.70	24
	6985	207	12.48	12.26	15.38	-	-	-	11.97	12.22	15.11	-5.63	-5.26	-2.43	12.95	24

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	14.46	14.34	17.41	-	-	-	-3.76	-4.02	-0.88	16.53	24
	6185	47	-	-	-	14.59	14.49	17.55	-	-	-	-3.76	-4.02	-0.88	16.67	24
	6345	79	-	-	-	14.10	14.44	17.28	-	-	-	-3.76	-4.02	-0.88	16.40	24
UNII6	6505	111	-	-	-	14.40	15.10	17.78	-	-	-	-5.82	-5.08	-2.43	15.35	24
UNII7	6665	143	-	-	-	15.02	14.69	17.87	-	-	-	-5.82	-5.08	-2.43	15.44	24
UNII8	6825	175	-	-	-	15.05	14.94	18.01	-	-	-	-5.63	-5.26	-2.43	15.58	24
	6985	207	-	-	-	11.81	11.91	14.87	-	-	-	-5.63	-5.26	-2.43	12.44	24

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.95	15.73	18.85	-	-	-	-3.76	-4.02	-0.88	17.97	24
	6185	47	-	-	-	15.69	15.45	18.58	-	-	-	-3.76	-4.02	-0.88	17.70	24
	6345	79	-	-	-	15.50	15.92	18.72	-	-	-	-3.76	-4.02	-0.88	17.84	24
UNII6	6505	111	-	-	-	15.32	16.22	18.81	-	-	-	-5.82	-5.08	-2.43	16.38	24
UNII7	6665	143	-	-	-	15.48	15.06	18.29	-	-	-	-5.82	-5.08	-2.43	15.86	24
UNII8	6825	175	-	-	-	15.81	15.34	18.59	-	-	-	-5.63	-5.26	-2.43	16.16	24
	6985	207	-	-	-	13.26	12.75	16.02	-	-	-	-5.63	-5.26	-2.43	13.59	24

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	16.54	16.35	19.46	-	-	-	-3.76	-4.02	-0.88	18.58	24
	6185	47	-	-	-	16.26	16.05	19.17	-	-	-	-3.76	-4.02	-0.88	18.29	24
	6345	79	-	-	-	16.13	16.50	19.33	-	-	-	-3.76	-4.02	-0.88	18.45	24
UNII6	6505	111	-	-	-	15.50	16.32	18.94	-	-	-	-5.82	-5.08	-2.43	16.51	24
UNII7	6665	143	-	-	-	16.09	15.70	18.91	-	-	-	-5.82	-5.08	-2.43	16.48	24
UNII8	6825	175	-	-	-	16.41	15.94	19.19	-	-	-	-5.63	-5.26	-2.43	16.76	24
	6985	207	-	-	-	13.49	13.06	16.29	-	-	-	-5.63	-5.26	-2.43	13.86	24

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-3.01	-2.16	0.44	-2.61	-1.30	1.10	-2.51	-0.72	1.48	-3.76	-4.02	-0.88	0.60	24
	6265	63	-2.59	-1.69	0.89	-2.56	-1.02	1.29	-2.85	-0.65	1.40	-3.76	-4.02	-0.88	0.52	24
UNII6	6425	95	-4.13	-0.75	0.89	-4.08	-0.55	1.04	-4.04	-0.34	1.20	-5.82	-5.08	-2.43	-1.23	24
	6585	127	-4.81	-0.71	0.71	-4.27	-0.78	0.83	-3.76	-0.74	1.02	-5.82	-5.08	-2.43	-1.41	24
UNII8	6745	159	-4.83	-1.73	0.00	-4.33	-1.08	0.60	-3.97	-0.76	0.94	-5.63	-5.26	-2.43	-1.49	24
	6905	191	-4.64	-1.55	0.19	-4.35	-1.09	0.59	-4.45	-0.79	0.77	-5.63	-5.26	-2.43	-1.66	24

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	1.87	1.28	4.60	2.04	1.44	4.76	2.15	1.56	4.88	-3.76	-4.02	-0.88	4.00	24
	6265	63	2.02	2.07	5.06	1.96	2.07	5.03	1.82	2.07	4.95	-3.76	-4.02	-0.88	4.18	24
UNII6	6425	95	1.33	2.41	4.91	1.26	2.40	4.88	1.28	2.55	4.97	-5.82	-5.08	-2.43	2.54	24
	6585	127	1.34	1.83	4.61	1.42	1.65	4.54	1.64	1.77	4.72	-5.82	-5.08	-2.43	2.29	24
UNII8	6745	159	1.64	0.50	4.12	1.80	0.81	4.34	1.96	1.12	4.57	-5.63	-5.26	-2.43	2.14	24
	6905	191	2.53	0.59	4.68	2.51	0.79	4.75	2.44	1.12	4.84	-5.63	-5.26	-2.43	2.41	24

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	4.81	4.76	7.79	4.96	4.87	7.93	5.07	4.95	8.02	-3.76	-4.02	-0.88	7.14	24
	6265	63	5.44	4.95	8.21	5.32	4.95	8.15	5.22	4.91	8.08	-3.76	-4.02	-0.88	7.33	24
UNII6	6425	95	4.72	5.43	8.10	4.63	5.39	8.04	4.65	5.50	8.11	-5.82	-5.08	-2.43	5.68	24
	6585	127	4.69	4.87	7.79	4.73	4.70	7.72	4.95	4.79	7.88	-5.82	-5.08	-2.43	5.45	24
UNII8	6745	159	4.95	3.74	7.40	5.07	3.98	7.57	5.21	4.22	7.75	-5.63	-5.26	-2.43	5.32	24
	6905	191	5.39	3.04	7.39	5.35	3.19	7.41	5.25	3.42	7.44	-5.63	-5.26	-2.43	5.01	24

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.64	8.06	11.37	8.67	8.11	11.41	8.78	8.23	11.52	-3.76	-4.02	-0.88	10.64	24
	6265	63	8.84	8.44	11.66	8.74	8.38	11.58	8.57	8.32	11.46	-3.76	-4.02	-0.88	10.78	24
UNII6	6425	95	8.26	9.45	11.90	8.18	9.34	11.81	8.10	9.38	11.80	-5.82	-5.08	-2.43	9.47	24
	6585	127	8.85	9.38	12.13	8.83	9.28	12.07	9.00	9.20	12.11	-5.82	-5.08	-2.43	9.70	24
UNII8	6745	159	9.22	8.15	11.73	9.27	8.28	11.82	9.38	8.50	11.97	-5.63	-5.26	-2.43	9.54	24
	6905	191	9.57	7.41	11.63	9.53	7.45	11.62	9.36	7.61	11.58	-5.63	-5.26	-2.43	9.20	24

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	11.60	11.36	14.49	-	-	-	11.68	11.49	14.60	-3.76	-4.02	-0.88	13.72	24
	6265	63	11.68	11.60	14.65	-	-	-	11.52	11.55	14.55	-3.76	-4.02	-0.88	13.77	24
UNII6	6425	95	11.91	12.88	15.43	-	-	-	11.79	12.84	15.36	-5.82	-5.08	-2.43	13.00	24
	6585	127	11.98	12.16	15.08	-	-	-	12.06	12.00	15.04	-5.82	-5.08	-2.43	12.65	24
UNII8	6745	159	12.33	11.20	14.81	-	-	-	12.45	11.42	14.98	-5.63	-5.26	-2.43	12.55	24
	6905	191	12.59	10.68	14.75	-	-	-	12.44	10.78	14.70	-5.63	-5.26	-2.43	12.32	24

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.83	14.67	17.76	-	-	-	-3.76	-4.02	-0.88	16.88	24
	6265	63	-	-	-	14.83	14.75	17.80	-	-	-	-3.76	-4.02	-0.88	16.92	24
UNII6	6425	95	-	-	-	14.87	15.69	18.31	-	-	-	-5.82	-5.08	-2.43	15.88	24
	6585	127	-	-	-	14.97	15.00	17.99	-	-	-	-5.82	-5.08	-2.43	15.56	24
UNII8	6745	159	-	-	-	15.32	14.39	17.89	-	-	-	-5.63	-5.26	-2.43	15.46	24
	6905	191	-	-	-	12.42	10.69	14.65	-	-	-	-5.63	-5.26	-2.43	12.22	24

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-4.34	-2.66	-0.41	-3.70	-1.50	0.55	-3.24	-0.73	1.20	-3.76	-4.02	-0.88	0.32	24
	6265	63	-4.89	-2.50	-0.52	-4.37	-1.56	0.27	-4.00	-1.09	0.71	-3.76	-4.02	-0.88	-0.17	24
UNII6	6425	95	-6.03	-2.37	-0.81	-4.98	-1.86	-0.13	-4.26	-1.40	0.41	-5.82	-5.08	-2.43	-2.02	24
	6585	127	-5.65	-2.65	-0.89	-4.64	-2.04	-0.14	-3.82	-1.53	0.49	-5.82	-5.08	-2.43	-1.94	24
UNII8	6745	159	-5.83	-2.64	-0.94	-4.97	-1.73	-0.04	-4.52	-0.96	0.63	-5.63	-5.26	-2.43	-1.80	24
	6905	191	-6.38	-2.65	-1.12	-5.96	-1.75	-0.36	-5.84	-1.30	0.00	-5.63	-5.26	-2.43	-2.43	24

Mode : EHT320(80LM) 52T

Mode : EHT320(80LM/32T)																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	1.99	1.45	4.74	1.89	1.40	4.66	1.94	1.52	4.75	-3.76	-4.02	-0.88	3.87	24
	6265	63	1.63	1.90	4.78	1.43	1.85	4.66	1.47	1.92	4.71	-3.76	-4.02	-0.88	3.90	24
UNII6	6425	95	1.10	2.37	4.79	1.21	2.21	4.75	1.47	2.47	5.01	-5.82	-5.08	-2.43	2.58	24
	6585	127	1.55	1.61	4.59	1.60	1.51	4.57	1.84	1.66	4.76	-5.82	-5.08	-2.43	2.33	24
UNII8	6745	159	1.91	0.92	4.45	1.88	0.95	4.45	1.91	1.43	4.68	-5.63	-5.26	-2.43	2.25	24
	6905	191	2.26	0.96	4.67	1.93	1.09	4.54	1.75	1.45	4.61	-5.63	-5.26	-2.43	2.24	24

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	5.04	4.77	7.92	4.91	4.70	7.82	4.95	4.82	7.90	-3.76	-4.02	-0.88	7.04	24
	6265	63	5.10	4.67	7.90	4.89	4.61	7.76	4.87	4.67	7.78	-3.76	-4.02	-0.88	7.02	24
UNII6	6425	95	4.54	5.26	7.92	4.65	5.13	7.90	4.84	5.33	8.10	-5.82	-5.08	-2.43	5.67	24
	6585	127	4.97	4.60	7.80	4.96	4.49	7.74	5.18	4.56	7.89	-5.82	-5.08	-2.43	5.46	24
UNII8	6745	159	5.17	4.04	7.65	5.15	4.16	7.69	5.14	4.49	7.84	-5.63	-5.26	-2.43	5.41	24
	6905	191	5.74	3.79	7.88	5.34	3.95	7.71	5.19	4.20	7.73	-5.63	-5.26	-2.43	5.45	24

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	8.99	8.72	11.87	8.93	8.69	11.83	8.73	8.62	11.69	-3.76	-4.02	-0.88	10.99	24
	6265	63	8.59	8.91	11.76	8.47	8.84	11.67	8.22	8.70	11.48	-3.76	-4.02	-0.88	10.88	24
UNII6	6425	95	8.69	9.89	12.34	8.71	9.79	12.29	8.81	9.83	12.36	-5.82	-5.08	-2.43	9.93	24
	6585	127	9.04	9.15	12.11	9.03	9.12	12.08	9.10	8.94	12.03	-5.82	-5.08	-2.43	9.68	24
UNII8	6745	159	9.42	8.50	12.00	9.37	8.48	11.96	9.24	8.64	11.96	-5.63	-5.26	-2.43	9.57	24
	6905	191	9.72	8.26	12.06	9.54	8.32	11.98	9.06	8.39	11.75	-5.63	-5.26	-2.43	9.63	24

Mode : EHT320(80LM) 484T

MODE : EHT520(50LM) 4041

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	11.90	11.71	14.82	-	-	-	11.74	11.64	14.70	-3.76	-4.02	-0.88	13.94	24
	6265	63	11.66	11.78	14.73	-	-	-	11.45	11.66	14.57	-3.76	-4.02	-0.88	13.85	24
UNII6	6425	95	11.70	12.70	15.24	-	-	-	11.86	12.68	15.30	-5.82	-5.08	-2.43	12.87	24
	6585	127	12.16	11.96	15.07	-	-	-	12.22	11.84	15.05	-5.82	-5.08	-2.43	12.64	24
UNII8	6745	159	12.50	11.45	15.02	-	-	-	12.40	11.59	15.03	-5.63	-5.26	-2.43	12.60	24
	6905	191	12.57	11.49	15.08	-	-	-	12.19	11.61	14.92	-5.63	-5.26	-2.43	12.65	24

Mode : EHT320(80LM) 996T

MODE : EHT520(50LM)/5501

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-	-	-	14.87	14.68	17.79	-	-	-	-3.76	-4.02	-0.88	16.91	24
	6265	63	-	-	-	14.49	14.51	17.51	-	-	-	-3.76	-4.02	-0.88	16.63	24
UNII6	6425	95	-	-	-	14.76	15.52	18.16	-	-	-	-5.82	-5.08	-2.43	15.73	24
	6585	127	-	-	-	15.10	14.84	17.98	-	-	-	-5.82	-5.08	-2.43	15.55	24
UNII8	6745	159	-	-	-	15.35	14.58	17.99	-	-	-	-5.63	-5.26	-2.43	15.56	24
	6905	191	-	-	-	12.28	11.50	14.92	-	-	-	-5.63	-5.26	-2.43	12.49	24

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-3.31	-0.67	1.22	-4.31	-1.32	0.45	-5.46	-2.13	-0.47	-3.76	-4.02	-0.88	0.34	24
	6265	63	-4.09	-0.96	0.76	-4.96	-2.00	-0.23	-5.71	-2.94	-1.10	-3.76	-4.02	-0.88	-0.12	24
UNII6	6425	95	-4.12	-1.35	0.49	-4.72	-2.55	-0.49	-5.16	-3.65	-1.33	-5.82	-5.08	-2.43	-1.94	24
	6585	127	-3.73	-1.54	0.51	-4.24	-2.10	-0.03	-4.89	-2.92	-0.78	-5.82	-5.08	-2.43	-1.92	24
UNII8	6745	159	-4.58	-0.84	0.69	-5.41	-1.64	-0.12	-6.46	-2.35	-0.92	-5.63	-5.26	-2.43	-1.74	24
	6905	191	-5.95	-1.29	-0.01	-7.29	-2.41	-1.19	-8.61	-3.38	-2.24	-5.63	-5.26	-2.43	-2.44	24

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	2.31	2.27	5.30	2.17	2.24	5.22	1.63	1.75	4.70	-3.76	-4.02	-0.88	4.42	24
	6265	63	1.90	2.34	5.14	1.76	2.22	5.01	1.39	1.87	4.65	-3.76	-4.02	-0.88	4.26	24
UNII6	6425	95	1.49	2.56	5.07	1.56	2.28	4.95	1.37	1.96	4.69	-5.82	-5.08	-2.43	2.64	24
	6585	127	1.90	1.72	4.82	1.96	1.93	4.96	1.74	1.78	4.77	-5.82	-5.08	-2.43	2.53	24
UNII8	6745	159	1.91	1.45	4.70	1.85	1.60	4.73	1.31	1.43	4.38	-5.63	-5.26	-2.43	2.30	24
	6905	191	2.23	1.87	5.06	1.56	1.79	4.69	0.78	1.55	4.19	-5.63	-5.26	-2.43	2.63	24

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.70	5.34	8.54	5.54	5.28	8.42	5.13	4.93	8.04	-3.76	-4.02	-0.88	7.66	24
	6265	63	5.17	5.09	8.14	5.04	4.98	8.02	4.76	4.76	7.77	-3.76	-4.02	-0.88	7.26	24
UNII6	6425	95	4.77	5.35	8.08	4.78	5.11	7.96	4.67	4.86	7.78	-5.82	-5.08	-2.43	5.65	24
	6585	127	5.12	4.63	7.89	5.20	4.86	8.04	5.03	4.73	7.89	-5.82	-5.08	-2.43	5.61	24
UNII8	6745	159	5.07	4.48	7.79	4.98	4.59	7.80	4.59	4.54	7.57	-5.63	-5.26	-2.43	5.37	24
	6905	191	5.61	4.67	8.18	4.91	4.63	7.78	4.31	4.48	7.41	-5.63	-5.26	-2.43	5.75	24

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.84	8.52	11.69	8.76	8.45	11.62	8.55	8.36	11.47	-3.76	-4.02	-0.88	10.81	24
	6265	63	8.34	8.58	11.47	8.21	8.46	11.35	8.18	8.48	11.34	-3.76	-4.02	-0.88	10.59	24
UNII6	6425	95	8.78	9.79	12.32	8.79	9.68	12.27	8.94	9.58	12.28	-5.82	-5.08	-2.43	9.89	24
	6585	127	9.14	9.02	12.09	9.20	9.13	12.17	9.31	9.31	12.32	-5.82	-5.08	-2.43	9.89	24
UNII8	6745	159	9.18	8.75	11.98	9.13	8.80	11.98	8.95	8.92	11.95	-5.63	-5.26	-2.43	9.55	24
	6905	191	9.34	8.86	12.12	9.01	8.84	11.94	8.47	8.81	11.65	-5.63	-5.26	-2.43	9.69	24

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	11.84	11.31	14.59	-	-	-	11.67	11.23	14.47	-3.76	-4.02	-0.88	13.71	24
	6265	63	11.29	11.29	14.30	-	-	-	11.17	11.38	14.29	-3.76	-4.02	-0.88	13.42	24
UNII6	6425	95	11.81	12.58	15.22	-	-	-	11.90	12.40	15.17	-5.82	-5.08	-2.43	12.79	24
	6585	127	12.24	11.89	15.08	-	-	-	12.31	12.08	15.21	-5.82	-5.08	-2.43	12.78	24
UNII8	6745	159	12.24	11.73	15.00	-	-	-	12.08	11.82	14.96	-5.63	-5.26	-2.43	12.57	24
	6905	191	12.54	12.45	15.50	-	-	-	11.91	12.38	15.16	-5.63	-5.26	-2.43	13.07	24

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.48	14.53	17.51	-	-	-	-3.76	-4.02	-0.88	16.63	24
	6265	63	-	-	-	14.02	14.25	17.15	-	-	-	-3.76	-4.02	-0.88	16.27	24
UNII6	6425	95	-	-	-	14.77	15.32	18.06	-	-	-	-5.82	-5.08	-2.43	15.63	24
	6585	127	-	-	-	15.21	14.92	18.08	-	-	-	-5.82	-5.08	-2.43	15.65	24
UNII8	6745	159	-	-	-	15.08	14.85	17.98	-	-	-	-5.63	-5.26	-2.43	15.55	24
	6905	191	-	-	-	12.21	12.38	15.31	-	-	-	-5.63	-5.26	-2.43	12.88	24

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-3.81	-0.06	1.47	-4.30	-0.42	1.07	-4.86	-1.07	0.45	-3.76	-4.02	-0.88	0.59	24
	6265	63	-3.78	-0.93	0.89	-3.65	-1.58	0.52	-3.59	-1.96	0.31	-3.76	-4.02	-0.88	0.01	24
UNII6	6425	95	-3.07	-1.59	0.74	-3.07	-2.14	0.43	-3.07	-2.68	0.14	-5.82	-5.08	-2.43	-1.69	24
	6585	127	-2.87	-0.98	1.19	-3.12	-1.21	0.95	-3.53	-1.34	0.71	-5.82	-5.08	-2.43	-1.24	24
UNII8	6745	159	-4.59	-0.43	0.98	-5.29	-0.74	0.56	-5.95	-1.19	0.07	-5.63	-5.26	-2.43	-1.45	24
	6905	191	-6.77	-1.48	-0.35	-7.65	-2.06	-1.00	-8.50	-2.58	-1.59	-5.63	-5.26	-2.43	-2.78	24

Mode : EHT320(80HH) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	1.78	1.97	4.89	1.56	1.84	4.72	1.25	1.58	4.43	-3.76	-4.02	-0.88	4.01	24
	6265	63	1.56	2.00	4.80	1.64	1.86	4.76	1.61	1.83	4.73	-3.76	-4.02	-0.88	3.92	24
UNII6	6425	95	1.63	2.21	4.94	1.60	2.03	4.83	1.55	1.86	4.72	-5.82	-5.08	-2.43	2.51	24
	6585	127	2.08	1.95	5.03	2.00	1.97	4.99	1.67	2.06	4.88	-5.82	-5.08	-2.43	2.60	24
UNII8	6745	159	1.49	1.63	4.57	1.10	1.75	4.45	0.61	1.76	4.24	-5.63	-5.26	-2.43	2.14	24
	6905	191	1.66	2.21	4.95	1.03	2.13	4.63	0.51	1.92	4.28	-5.63	-5.26	-2.43	2.52	24

Mode : EHT320(80HH) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	5.25	5.07	8.17	5.01	4.93	7.98	4.76	4.74	7.76	-3.76	-4.02	-0.88	7.29	24
	6265	63	4.87	4.85	7.87	4.98	4.69	7.85	4.97	4.64	7.82	-3.76	-4.02	-0.88	6.99	24
UNII6	6425	95	4.92	5.04	7.99	4.90	4.91	7.91	4.90	4.74	7.83	-5.82	-5.08	-2.43	5.56	24
	6585	127	5.33	4.87	8.12	5.21	4.89	8.06	5.00	5.02	8.02	-5.82	-5.08	-2.43	5.69	24
UNII8	6745	159	4.71	4.69	7.71	4.30	4.81	7.57	3.91	4.84	7.41	-5.63	-5.26	-2.43	5.28	24
	6905	191	4.87	5.05	7.97	4.28	4.99	7.66	3.86	4.92	7.43	-5.63	-5.26	-2.43	5.54	24

Mode : EHT320(80HH) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.71	8.73	11.73	8.61	8.67	11.65	8.37	8.52	11.46	-3.76	-4.02	-0.88	10.85	24
	6265	63	8.52	8.78	11.66	8.53	8.69	11.62	8.68	8.73	11.71	-3.76	-4.02	-0.88	10.83	24
UNII6	6425	95	9.00	9.55	12.29	8.98	9.49	12.25	9.06	9.36	12.22	-5.82	-5.08	-2.43	9.86	24
	6585	127	9.37	9.28	12.34	9.33	9.28	12.31	9.14	9.44	12.31	-5.82	-5.08	-2.43	9.91	24
UNII8	6745	159	8.81	9.01	11.92	8.61	9.09	11.87	8.19	9.17	11.72	-5.63	-5.26	-2.43	9.49	24
	6905	191	8.61	9.40	12.03	8.27	9.34	11.85	7.80	9.28	11.62	-5.63	-5.26	-2.43	9.60	24

Mode : EHT320(80HH) 484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	11.34	11.25	14.30	-	-	-	11.08	11.11	14.11	-3.76	-4.02	-0.88	13.42	24
	6265	63	11.11	11.24	14.18	-	-	-	11.19	11.19	14.20	-3.76	-4.02	-0.88	13.32	24
UNII6	6425	95	12.02	12.36	15.20	-	-	-	12.04	12.22	15.14	-5.82	-5.08	-2.43	12.77	24
	6585	127	12.42	12.09	15.27	-	-	-	12.27	12.20	15.25	-5.82	-5.08	-2.43	12.84	24
UNII8	6745	159	11.79	11.99	14.90	-	-	-	11.37	12.09	14.76	-5.63	-5.26	-2.43	12.47	24
	6905	191	11.32	12.33	14.87	-	-	-	10.77	12.26	14.59	-5.63	-5.26	-2.43	12.44	24

Mode : EHT320(80HH) 996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.46	14.64	17.56	-	-	-	-3.76	-4.02	-0.88	16.68	24
	6265	63	-	-	-	14.37	14.59	17.49	-	-	-	-3.76	-4.02	-0.88	16.61	24
UNII6	6425	95	-	-	-	14.94	15.13	18.04	-	-	-	-5.82	-5.08	-2.43	15.61	24
	6585	127	-	-	-	15.32	15.09	18.22	-	-	-	-5.82	-5.08	-2.43	15.79	24
UNII8	6745	159	-	-	-	14.51	15.13	17.84	-	-	-	-5.63	-5.26	-2.43	15.41	24
	6905	191	-	-	-	11.26	12.58	14.98	-	-	-	-5.63	-5.26	-2.43	12.55	24

Mode : EHT320(160L) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	16.51	16.04	19.29	-	-	-	-3.76	-4.02	-0.88	18.41	24
	6265	63	-	-	-	16.22	16.25	19.24	-	-	-	-3.76	-4.02	-0.88	18.36	24
UNII6	6425	95	-	-	-	15.81	16.61	19.24	-	-	-	-5.82	-5.08	-2.43	16.81	24
	6585	127	-	-	-	16.00	16.02	19.02	-	-	-	-5.82	-5.08	-2.43	16.59	24
UNII8	6745	159	-	-	-	16.26	15.55	18.93	-	-	-	-5.63	-5.26	-2.43	16.50	24
	6905	191	-	-	-	13.99	12.61	16.36	-	-	-	-5.63	-5.26	-2.43	13.93	24

Mode : EHT320(160U) 2x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	16.47	16.24	19.36	-	-	-	-3.76	-4.02	-0.88	18.48	24
	6265	63	-	-	-	16.12	16.32	19.23	-	-	-	-3.76	-4.02	-0.88	18.35	24
UNII6	6425	95	-	-	-	15.86	16.25	19.07	-	-	-	-5.82	-5.08	-2.43	16.64	24
	6585	127	-	-	-	16.20	16.07	19.14	-	-	-	-5.82	-5.08	-2.43	16.71	24
UNII8	6745	159	-	-	-	15.76	16.03	18.91	-	-	-	-5.63	-5.26	-2.43	16.48	24
	6905	191	-	-	-	12.72	13.39	16.08	-	-	-	-5.63	-5.26	-2.43	13.65	24

Mode : EHT320 4x996T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	16.87	16.34	19.62	-	-	-	-3.76	-4.02	-0.88	18.74	24
	6265	63	-	-	-	16.47	16.51	19.50	-	-	-	-3.76	-4.02	-0.88	18.62	24
UNII6	6425	95	-	-	-	15.82	16.41	19.13	-	-	-	-5.82	-5.08	-2.43	16.70	24
	6585	127	-	-	-	16.17	15.96	19.08	-	-	-	-5.82	-5.08	-2.43	16.65	24
UNII8	6745	159	-	-	-	16.06	15.74	18.91	-	-	-	-5.63	-5.26	-2.43	16.48	24
	6905	191	-	-	-	13.33	12.77	16.07	-	-	-	-5.63	-5.26	-2.43	13.64	24

Mode : EHT320 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	16.73	16.29	19.52	-	-	-	-3.76	-4.02	-0.88	18.64	24
	6265	63	-	-	-	16.39	16.44	19.43	-	-	-	-3.76	-4.02	-0.88	18.55	24
UNII6	6425	95	-	-	-	16.28	16.85	19.59	-	-	-	-5.82	-5.08	-2.43	17.16	24
	6585	127	-	-	-	16.60	16.45	19.53	-	-	-	-5.82	-5.08	-2.43	17.10	24
UNII8	6745	159	-	-	-	16.51	16.20	19.37	-	-	-	-5.63	-5.26	-2.43	16.94	24
	6905	191	-	-	-	14.27	13.77	17.04	-	-	-	-5.63	-5.26	-2.43	14.61	24

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	7.86	7.60	10.74	-	-	-	-3.76	-4.02	-0.88	9.86	24
	6175	45	-	-	-	8.58	8.40	11.50	-	-	-	-3.76	-4.02	-0.88	10.62	24
	6415	93	-	-	-	7.35	8.71	11.09	-	-	-	-3.76	-4.02	-0.88	10.21	24
UNII6	6435	97	-	-	-	8.46	9.41	11.97	-	-	-	-5.82	-5.08	-2.43	9.54	24
	6475	105	-	-	-	8.28	9.38	11.87	-	-	-	-5.82	-5.08	-2.43	9.44	24
	6515	113	-	-	-	8.18	9.29	11.78	-	-	-	-5.82	-5.08	-2.43	9.35	24
UNII7	6535	117	-	-	-	8.48	9.13	11.83	-	-	-	-5.82	-5.08	-2.43	9.40	24
	6695	149	-	-	-	8.99	8.57	11.79	-	-	-	-5.82	-5.08	-2.43	9.36	24
	6855	181	-	-	-	9.43	9.37	12.41	-	-	-	-5.82	-5.08	-2.43	9.98	24
UNII8	6875	185	-	-	-	9.49	9.09	12.30	-	-	-	-5.63	-5.26	-2.43	9.87	24
	6995	209	-	-	-	9.88	9.37	12.64	-	-	-	-5.63	-5.26	-2.43	10.21	24
	7115	233	-	-	-	5.32	4.33	7.87	-	-	-	-5.63	-5.26	-2.43	5.44	24

[MRU]

Mode : EHT20 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	2.16	1.58	4.89	2.02	1.45	4.76	2.07	1.50	4.80	-3.76	-4.02	-0.88	4.01	24
	6175	45	2.34	1.92	5.15	2.23	1.79	5.02	2.30	1.87	5.10	-3.76	-4.02	-0.88	4.27	24
	6415	93	1.25	2.45	4.90	1.16	2.35	4.80	1.27	2.47	4.92	-3.76	-4.02	-0.88	4.04	24
UNII6	6435	97	1.72	2.53	5.15	1.61	2.43	5.05	1.70	2.49	5.13	-5.82	-5.08	-2.43	2.72	24
	6475	105	1.68	2.46	5.10	1.57	2.36	4.99	1.71	2.49	5.13	-5.82	-5.08	-2.43	2.70	24
	6515	113	1.57	2.40	5.02	1.46	2.26	4.89	1.52	2.39	4.99	-5.82	-5.08	-2.43	2.59	24
UNII7	6535	117	1.89	2.25	5.08	1.75	2.14	4.96	1.85	2.26	5.07	-5.82	-5.08	-2.43	2.65	24
	6695	149	2.32	1.86	5.10	2.22	1.76	5.01	2.30	1.92	5.12	-5.82	-5.08	-2.43	2.69	24
	6855	181	2.90	2.39	5.66	2.76	2.31	5.55	2.78	2.49	5.65	-5.82	-5.08	-2.43	3.23	24
UNII8	6875	185	2.36	1.88	5.14	2.24	1.77	5.02	2.27	1.95	5.13	-5.63	-5.26	-2.43	2.71	24
	6995	209	2.65	1.35	5.06	2.50	1.25	4.93	2.41	1.43	4.96	-5.63	-5.26	-2.43	2.63	24
	7115	233	2.46	1.45	4.99	2.32	1.35	4.87	2.40	1.54	5.00	-5.63	-5.26	-2.43	2.57	24

Mode : EHT20 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	5.03	4.87	7.96	-	-	-	4.97	4.82	7.90	-3.76	-4.02	-0.88	7.08	24
	6175	45	5.69	5.25	8.49	-	-	-	5.64	5.20	8.44	-3.76	-4.02	-0.88	7.61	24
	6415	93	4.60	5.05	7.84	-	-	-	4.61	5.07	7.86	-3.76	-4.02	-0.88	6.98	24
UNII6	6435	97	4.98	5.39	8.20	-	-	-	4.97	5.38	8.19	-5.82	-5.08	-2.43	5.77	24
	6475	105	4.90	5.30	8.12	-	-	-	4.94	5.32	8.14	-5.82	-5.08	-2.43	5.71	24
	6515	113	4.95	5.35	8.17	-	-	-	4.90	5.35	8.14	-5.82	-5.08	-2.43	5.74	24
UNII7	6535	117	5.08	5.16	8.13	-	-	-	5.06	5.16	8.12	-5.82	-5.08	-2.43	5.70	24
	6695	149	5.49	4.87	8.20	-	-	-	5.45	4.93	8.21	-5.82	-5.08	-2.43	5.78	24
	6855	181	5.91	5.02	8.50	-	-	-	5.81	5.11	8.48	-5.82	-5.08	-2.43	6.07	24
UNII8	6875	185	5.74	4.73	8.27	-	-	-	5.63	4.79	8.24	-5.63	-5.26	-2.43	5.84	24
	6995	209	5.91	4.48	8.26	-	-	-	5.77	4.53	8.20	-5.63	-5.26	-2.43	5.83	24
	7115	233	5.51	4.45	8.02	-	-	-	5.46	4.56	8.04	-5.63	-5.26	-2.43	5.61	24

Mode : EHT40 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm/MHz]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	1.97	1.51	4.76	1.76	1.32	4.55	1.91	1.46	4.70	-3.76	-4.02	-0.88	3.88	24
	6165	43	1.95	1.46	4.72	1.81	1.30	4.57	1.78	1.32	4.57	-3.76	-4.02	-0.88	3.84	24
	6405	91	1.42	2.09	4.77	1.31	1.98	4.67	1.48	2.13	4.82	-3.76	-4.02	-0.88	3.94	24
UNII6	6445	99	1.69	2.56	5.16	1.51	2.38	4.98	1.66	2.40	5.06	-5.82	-5.08	-2.43	2.73	24
	6485	107	1.45	2.46	5.00	1.34	2.36	4.89	1.58	2.50	5.07	-5.82	-5.08	-2.43	2.64	24
	6525	115	1.67	2.34	5.03	1.48	2.18	4.85	1.62	2.27	4.97	-5.82	-5.08	-2.43	2.60	24
UNII7	6565	123	2.03	1.84	4.94	1.87	1.69	4.79	2.08	1.76	4.94	-5.82	-5.08	-2.43	2.51	24
	6685	147	2.09	1.90	5.01	1.92	1.77	4.85	2.02	1.91	4.97	-5.82	-5.08	-2.43	2.58	24
	6845	179	2.89	2.33	5.63	2.64	2.26	5.46	2.57	2.48	5.54	-5.82	-5.08	-2.43	3.20	24
UNII8	6885	187	2.40	1.87	5.15	2.14	1.79	4.98	2.08	1.97	5.04	-5.63	-5.26	-2.43	2.72	24
	7005	211	2.64	1.32	5.04	2.32	1.21	4.81	2.18	1.35	4.79	-5.63	-5.26	-2.43	2.61	24
	7085	227	2.46	1.21	4.89	2.20	1.10	4.69	2.07	1.11	4.63	-5.63	-5.26	-2.43	2.46	24

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	5.28	4.69	8.00	5.11	4.52	7.83	5.24	4.62	7.95	-3.76	-4.02	-0.88	7.12	24
	6165	43	5.19	4.91	8.06	5.07	4.77	7.93	5.02	4.81	7.93	-3.76	-4.02	-0.88	7.18	24
	6405	91	4.64	5.17	7.92	4.53	5.08	7.82	4.69	5.24	7.98	-3.76	-4.02	-0.88	7.10	24
UNII6	6445	99	4.94	5.42	8.20	4.80	5.28	8.06	4.95	5.29	8.13	-5.82	-5.08	-2.43	5.77	24
	6485	107	4.69	5.32	8.03	4.60	5.23	7.94	4.84	5.36	8.12	-5.82	-5.08	-2.43	5.69	24
	6525	115	4.98	5.25	8.12	4.82	5.13	7.99	4.93	5.20	8.08	-5.82	-5.08	-2.43	5.69	24
UNII7	6565	123	5.27	4.83	8.06	5.16	4.72	7.96	5.34	4.77	8.08	-5.82	-5.08	-2.43	5.65	24
	6685	147	5.30	4.93	8.13	5.17	4.83	8.02	5.27	4.96	8.13	-5.82	-5.08	-2.43	5.70	24
	6845	179	5.88	5.02	8.48	5.67	4.93	8.33	5.58	5.16	8.39	-5.82	-5.08	-2.43	6.05	24
UNII8	6885	187	5.81	4.77	8.33	5.59	4.72	8.19	5.51	4.86	8.21	-5.63	-5.26	-2.43	5.90	24
	7005	211	5.87	4.54	8.27	5.59	4.47	8.08	5.42	4.59	8.04	-5.63	-5.26	-2.43	5.84	24
	7085	227	5.73	4.84	8.32	5.48	4.76	8.14	5.34	4.78	8.08	-5.63	-5.26	-2.43	5.89	24

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	1.79	1.20	4.52	1.70	1.10	4.42	1.73	1.13	4.45	-3.76	-4.02	-0.88	3.64	24
	6145	39	1.76	1.28	4.54	1.61	1.21	4.42	1.39	1.09	4.25	-3.76	-4.02	-0.88	3.66	24
	6385	87	0.63	1.46	4.08	0.63	1.31	4.00	0.74	1.33	4.05	-3.76	-4.02	-0.88	3.20	24
UNII6	6465	103	1.38	2.62	5.05	1.34	2.48	4.95	1.51	2.42	5.00	-5.82	-5.08	-2.43	2.62	24
	6545	119	1.70	2.11	4.92	1.63	2.02	4.84	1.71	1.89	4.81	-5.82	-5.08	-2.43	2.49	24
UNII7	6625	135	1.98	1.70	4.85	1.92	1.87	4.90	2.04	2.05	5.05	-5.82	-5.08	-2.43	2.62	24
	6705	151	1.96	1.66	4.82	1.84	1.65	4.76	1.68	1.82	4.76	-5.82	-5.08	-2.43	2.39	24
	6785	167	2.01	1.47	4.76	1.89	1.53	4.72	1.71	1.65	4.69	-5.82	-5.08	-2.43	2.33	24
UNII8	6865	183	2.25	1.68	4.98	1.94	1.81	4.89	1.52	1.89	4.72	-5.63	-5.26	-2.43	2.55	24
	6945	199	2.43	1.43	4.97	1.92	1.46	4.71	1.36	1.49	4.43	-5.63	-5.26	-2.43	2.54	24
	7025	215	2.11	0.75	4.49	1.58	0.77	4.20	1.05	0.73	3.90	-5.63	-5.26	-2.43	2.06	24

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	5.18	4.44	7.83	5.08	4.36	7.75	5.09	4.38	7.76	-3.76	-4.02	-0.88	6.95	24
	6145	39	5.11	4.66	7.90	5.00	4.58	7.81	4.76	4.49	7.64	-3.76	-4.02	-0.88	7.02	24
	6385	87	4.44	5.11	7.80	4.48	4.95	7.73	4.57	4.97	7.79	-3.76	-4.02	-0.88	6.92	24
UNII6	6465	103	4.67	5.43	8.07	4.63	5.28	7.98	4.82	5.21	8.03	-5.82	-5.08	-2.43	5.64	24
	6545	119	5.05	5.02	8.05	4.97	4.93	7.96	5.09	4.80	7.96	-5.82	-5.08	-2.43	5.62	24
UNII7	6625	135	5.29	4.65	7.99	5.25	4.80	8.04	5.38	4.98	8.19	-5.82	-5.08	-2.43	5.76	24
	6705	151	5.23	4.68	7.97	5.16	4.67	7.94	4.97	4.86	7.92	-5.82	-5.08	-2.43	5.54	24
	6785	167	5.31	4.48	7.93	5.22	4.55	7.91	5.01	4.69	7.86	-5.82	-5.08	-2.43	5.50	24
UNII8	6865	183	5.80	4.49	8.20	5.49	4.62	8.08	5.05	4.72	7.90	-5.63	-5.26	-2.43	5.77	24
	6945	199	5.77	4.17	8.05	5.30	4.18	7.79	4.74	4.20	7.49	-5.63	-5.26	-2.43	5.62	24
	7025	215	5.62	3.87	7.84	5.11	3.88	7.55	4.60	3.84	7.24	-5.63	-5.26	-2.43	5.41	24

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	11.25	10.88	14.08	11.27	10.89	14.09	11.24	10.88	14.08	-3.76	-4.02	-0.88	13.21	24
	6145	39	11.05	10.92	14.00	11.08	10.92	14.01	11.13	10.93	14.04	-3.76	-4.02	-0.88	13.16	24
	6385	87	10.70	11.21	13.97	10.69	11.24	13.98	10.65	11.23	13.96	-3.76	-4.02	-0.88	13.10	24
UNII6	6465	103	11.94	12.58	15.28	11.94	12.61	15.30	11.83	12.63	15.26	-5.82	-5.08	-2.43	12.87	24
	6545	119	12.16	12.22	15.20	12.19	12.24	15.22	12.09	12.28	15.20	-5.82	-5.08	-2.43	12.79	24
UNII7	6625	135	12.57	12.12	15.36	12.53	12.08	15.32	12.50	12.00	15.27	-5.82	-5.08	-2.43	12.93	24
	6705	151	12.31	12.04	15.18	12.32	12.05	15.19	12.37	11.99	15.19	-5.82	-5.08	-2.43	12.76	24
	6785	167	12.34	11.87	15.12	12.36	11.84	15.12	12.39	11.78	15.10	-5.82	-5.08	-2.43	12.69	24
UNII8	6865	183	12.25	12.05	15.16	12.30	12.01	15.16	12.45	11.97	15.22	-5.63	-5.26	-2.43	12.79	24
	6945	199	11.79	11.66	14.73	11.87	11.66	14.78	12.09	11.65	14.89	-5.63	-5.26	-2.43	12.46	24
	7025	215	12.18	11.62	14.92	12.32	11.64	15.00	12.53	11.63	15.12	-5.63	-5.26	-2.43	12.69	24

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	2.05	1.56	4.82	2.11	1.61	4.87	2.12	1.61	4.88	-3.76	-4.02	-0.88	4.00	24
	6185	47	2.17	1.78	4.99	2.16	1.82	5.00	1.95	1.71	4.84	-3.76	-4.02	-0.88	4.12	24
	6345	79	1.92	2.36	5.15	1.90	2.31	5.12	1.82	2.33	5.09	-3.76	-4.02	-0.88	4.27	24
UNII6	6505	111	1.02	2.37	4.76	1.06	2.30	4.73	1.24	2.23	4.77	-5.82	-5.08	-2.43	2.34	24
UNII7	6665	143	1.76	0.86	4.34	1.85	1.14	4.52	1.98	1.31	4.67	-5.82	-5.08	-2.43	2.24	24
UNII8	6825	175	2.20	1.29	4.78	2.21	1.46	4.86	1.97	1.65	4.82	-5.63	-5.26	-2.43	2.43	24
	6985	207	2.82	0.49	4.82	2.40	0.58	4.60	1.84	0.60	4.27	-5.63	-5.26	-2.43	2.39	24

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	5.64	5.08	8.38	5.73	5.19	8.48	5.57	5.12	8.36	-3.76	-4.02	-0.88	7.60	24
	6185	47	5.62	4.95	8.31	5.60	4.98	8.31	5.38	4.89	8.15	-3.76	-4.02	-0.88	7.43	24
	6345	79	5.35	5.40	8.38	5.32	5.39	8.36	5.25	5.40	8.34	-3.76	-4.02	-0.88	7.50	24
UNII6	6505	111	4.46	5.32	7.92	4.52	5.27	7.92	4.70	5.19	7.96	-5.82	-5.08	-2.43	5.53	24
UNII7	6665	143	4.99	3.91	7.49	5.09	4.21	7.68	5.21	4.37	7.82	-5.82	-5.08	-2.43	5.39	24
UNII8	6825	175	5.42	3.75	7.67	5.44	3.94	7.76	5.25	4.09	7.71	-5.63	-5.26	-2.43	5.33	24
	6985	207	5.61	3.10	7.54	5.21	3.20	7.34	4.62	3.20	6.98	-5.63	-5.26	-2.43	5.11	24

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	11.03	10.99	14.02	10.98	10.95	13.97	10.90	10.89	13.90	-3.76	-4.02	-0.88	13.14	24
	6185	47	11.01	11.05	14.04	11.04	11.07	14.06	11.05	11.06	14.07	-3.76	-4.02	-0.88	13.19	24
	6345	79	10.75	11.12	13.95	10.78	11.16	13.98	10.78	11.16	13.99	-3.76	-4.02	-0.88	13.11	24
UNII6	6505	111	11.68	12.52	15.13	11.63	12.57	15.14	11.54	12.59	15.11	-5.82	-5.08	-2.43	12.71	24
UNII7	6665	143	12.35	11.49	14.95	12.31	11.43	14.90	12.21	11.35	14.81	-5.82	-5.08	-2.43	12.52	24
UNII8	6825	175	12.38	11.51	14.98	12.33	11.50	14.94	12.37	11.42	14.93	-5.63	-5.26	-2.43	12.55	24
	6985	207	11.90	10.93	14.46	12.05	10.93	14.53	12.20	10.93	14.62	-5.63	-5.26	-2.43	12.19	24

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	2.09	1.66	4.89	2.01	1.57	4.81	1.84	1.46	4.67	-3.76	-4.02	-0.88	4.01	24
	6185	47	2.38	2.33	5.37	2.20	2.26	5.24	1.93	2.07	5.01	-3.76	-4.02	-0.88	4.49	24
	6345	79	1.74	2.24	5.01	1.77	2.12	4.96	1.84	2.09	4.98	-3.76	-4.02	-0.88	4.13	24
UNII6	6505	111	1.30	2.24	4.80	1.22	2.13	4.71	1.34	1.96	4.67	-5.82	-5.08	-2.43	2.37	24
UNII7	6665	143	2.03	1.29	4.69	1.94	1.27	4.63	1.73	1.47	4.61	-5.82	-5.08	-2.43	2.26	24
UNII8	6825	175	2.44	2.04	5.25	2.12	2.17	5.16	1.65	2.21	4.95	-5.63	-5.26	-2.43	2.82	24
	6985	207	2.46	1.61	5.07	1.96	1.64	4.81	1.39	1.52	4.47	-5.63	-5.26	-2.43	2.64	24

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	5.66	5.21	8.45	5.59	5.14	8.38	5.39	5.04	8.23	-3.76	-4.02	-0.88	7.57	24
	6185	47	5.84	5.41	8.64	5.69	5.30	8.51	5.40	5.14	8.28	-3.76	-4.02	-0.88	7.76	24
	6345	79	5.21	5.35	8.29	5.26	5.21	8.24	5.35	5.21	8.29	-3.76	-4.02	-0.88	7.41	24
UNII6	6505	111	4.82	5.23	8.04	4.77	5.16	7.98	4.85	4.97	7.92	-5.82	-5.08	-2.43	5.61	24
UNII7	6665	143	5.35	4.41	7.92	5.27	4.41	7.87	5.08	4.55	7.83	-5.82	-5.08	-2.43	5.49	24
UNII8	6825	175	5.40	4.71	8.08	5.08	4.84	7.97	4.63	4.90	7.78	-5.63	-5.26	-2.43	5.65	24
	6985	207	5.92	4.67	8.35	5.44	4.67	8.09	4.90	4.63	7.78	-5.63	-5.26	-2.43	5.92	24

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	10.96	11.02	14.00	10.97	11.01	14.00	10.97	11.02	14.00	-3.76	-4.02	-0.88	13.12	24
	6185	47	10.59	10.89	13.75	10.59	10.89	13.75	10.68	10.93	13.82	-3.76	-4.02	-0.88	12.94	24
	6345	79	10.76	10.99	13.89	10.75	11.02	13.89	10.71	10.97	13.85	-3.76	-4.02	-0.88	13.01	24
UNII6	6505	111	11.70	12.47	15.11	11.69	12.45	15.10	11.60	12.50	15.09	-5.82	-5.08	-2.43	12.68	24
UNII7	6665	143	12.15	11.73	14.96	12.17	11.72	14.96	12.22	11.67	14.96	-5.82	-5.08	-2.43	12.53	24
UNII8	6825	175	12.11	12.10	15.11	12.16	12.07	15.13	12.32	12.02	15.18	-5.63	-5.26	-2.43	12.75	24
	6985	207	11.54	11.99	14.78	11.67	12.00	14.85	11.79	12.01	14.91	-5.63	-5.26	-2.43	12.48	24

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	14.05	14.10	17.09	14.00	14.04	17.03	14.04	14.06	17.06	-3.76	-4.02	-0.88	16.21	24
	6185	47	14.21	14.34	17.29	14.26	14.33	17.30	14.37	14.44	17.42	-3.76	-4.02	-0.88	16.54	24
	6345	79	13.67	14.18	16.94	13.70	14.20	16.97	13.68	14.26	16.99	-3.76	-4.02	-0.88	16.11	24
UNII6	6505	111	14.41	15.25	17.86	14.42	15.33	17.91	14.36	15.38	17.91	-5.82	-5.08	-2.43	15.48	24
UNII7	6665	143	15.08	14.69	17.90	15.03	14.64	17.85	15.06	14.56	17.83	-5.82	-5.08	-2.43	15.47	24
UNII8	6825	175	15.30	14.94	18.13	15.37	14.90	18.15	15.56	14.77	18.20	-5.63	-5.26	-2.43	15.77	24
	6985	207	12.29	12.02	15.17	12.49	12.02	15.27	12.77	12.03	15.42	-5.63	-5.26	-2.43	12.99	24

Mode : EHT320(80LL) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	2.05	1.55	4.82	2.18	1.58	4.90	2.29	1.64	4.99	-3.76	-4.02	-0.88	4.11	24
	6265	63	2.22	2.20	5.22	2.18	2.16	5.18	1.97	2.11	5.06	-3.76	-4.02	-0.88	4.34	24
UNII6	6425	95	1.48	2.64	5.11	1.40	2.54	5.02	1.40	2.62	5.06	-5.82	-5.08	-2.43	2.68	24
	6585	127	1.50	1.91	4.72	1.53	1.81	4.68	1.74	1.75	4.75	-5.82	-5.08	-2.43	2.32	24
UNII8	6745	159	1.83	0.66	4.29	1.90	0.88	4.43	2.06	1.09	4.61	-5.63	-5.26	-2.43	2.18	24
	6905	191	2.70	0.75	4.84	2.66	0.88	4.87	2.55	1.11	4.90	-5.63	-5.26	-2.43	2.47	24

Mode : EHT320(80LL) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	4.98	4.91	7.96	5.02	4.97	8.01	5.15	5.03	8.10	-3.76	-4.02	-0.88	7.22	24
	6265	63	5.51	4.96	8.25	5.43	4.99	8.22	5.26	4.94	8.11	-3.76	-4.02	-0.88	7.37	24
UNII6	6425	95	4.84	5.55	8.22	4.78	5.51	8.17	4.72	5.60	8.19	-5.82	-5.08	-2.43	5.79	24
	6585	127	4.81	4.97	7.90	4.85	4.88	7.87	5.04	4.83	7.95	-5.82	-5.08	-2.43	5.52	24
UNII8	6745	159	5.02	3.81	7.47	5.11	4.03	7.62	5.27	4.25	7.80	-5.63	-5.26	-2.43	5.37	24
	6905	191	5.38	3.11	7.40	5.38	3.30	7.47	5.21	3.49	7.45	-5.63	-5.26	-2.43	5.04	24

Mode : EHT320(80LL) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.03	10.73	13.89	11.10	10.83	13.98	11.06	10.78	13.93	-3.76	-4.02	-0.88	13.10	24
	6265	63	10.97	11.05	14.02	11.02	11.07	14.06	11.10	11.12	14.12	-3.76	-4.02	-0.88	13.24	24
UNII6	6425	95	11.89	12.88	15.42	11.94	12.88	15.45	11.96	12.91	15.47	-5.82	-5.08	-2.43	13.04	24
	6585	127	12.15	12.04	15.11	12.12	12.07	15.11	12.07	12.10	15.09	-5.82	-5.08	-2.43	12.68	24
UNII8	6745	159	12.46	11.35	14.95	12.45	11.30	14.92	12.42	11.25	14.89	-5.63	-5.26	-2.43	12.52	24
	6905	191	12.48	10.75	14.71	12.49	10.73	14.71	12.58	10.68	14.74	-5.63	-5.26	-2.43	12.31	24

Mode : EHT320(80LM) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	2.20	1.51	4.88	2.26	1.62	4.96	2.09	1.49	4.81	-3.76	-4.02	-0.88	4.08	24
	6265	63	1.83	1.97	4.91	1.85	2.08	4.97	1.58	1.95	4.78	-3.76	-4.02	-0.88	4.09	24
UNII6	6425	95	1.28	2.41	4.89	1.49	2.47	5.02	1.58	2.47	5.06	-5.82	-5.08	-2.43	2.63	24
	6585	127	1.77	1.66	4.73	1.86	1.80	4.84	1.94	1.59	4.78	-5.82	-5.08	-2.43	2.41	24
UNII8	6745	159	2.06	0.97	4.56	2.17	1.17	4.71	1.99	1.33	4.68	-5.63	-5.26	-2.43	2.28	24
	6905	191	2.38	1.00	4.75	2.26	1.33	4.83	1.78	1.40	4.60	-5.63	-5.26	-2.43	2.40	24

Mode : EHT320(80LM) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.29	4.98	8.15	5.39	5.10	8.26	5.19	4.95	8.08	-3.76	-4.02	-0.88	7.38	24
	6265	63	5.35	4.85	8.11	5.39	4.98	8.20	5.11	4.81	7.97	-3.76	-4.02	-0.88	7.32	24
UNII6	6425	95	4.78	5.43	8.13	4.99	5.47	8.25	5.04	5.49	8.28	-5.82	-5.08	-2.43	5.85	24
	6585	127	5.21	4.74	7.99	5.29	4.87	8.10	5.39	4.66	8.05	-5.82	-5.08	-2.43	5.67	24
UNII8	6745	159	5.46	4.14	7.86	5.57	4.33	8.01	5.37	4.51	7.97	-5.63	-5.26	-2.43	5.58	24
	6905	191	5.96	3.91	8.07	5.81	4.24	8.11	5.36	4.25	7.85	-5.63	-5.26	-2.43	5.68	24

Mode : EHT320(80LM) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.01	10.81	13.92	11.02	10.82	13.93	11.09	10.87	14.00	-3.76	-4.02	-0.88	13.12	24
	6265	63	11.05	11.33	14.20	11.07	11.34	14.22	11.16	11.40	14.29	-3.76	-4.02	-0.88	13.41	24
UNII6	6425	95	11.89	12.67	15.31	11.84	12.70	15.30	11.84	12.67	15.28	-5.82	-5.08	-2.43	12.88	24
	6585	127	12.28	11.83	15.07	12.21	11.87	15.05	12.22	11.90	15.07	-5.82	-5.08	-2.43	12.64	24
UNII8	6745	159	12.44	11.50	15.01	12.46	11.52	15.03	12.50	11.46	15.02	-5.63	-5.26	-2.43	12.60	24
	6905	191	12.32	11.55	14.96	12.39	11.53	14.99	12.52	11.50	15.05	-5.63	-5.26	-2.43	12.62	24

Mode : EHT320(80MH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	2.44	2.18	5.32	2.16	1.89	5.04	1.94	1.80	4.88	-3.76	-4.02	-0.88	4.44	24
	6265	63	1.98	2.25	5.12	1.68	1.96	4.83	1.61	1.95	4.80	-3.76	-4.02	-0.88	4.24	24
UNII6	6425	95	1.57	2.45	5.04	1.38	2.10	4.76	1.54	2.03	4.80	-5.82	-5.08	-2.43	2.61	24
	6585	127	2.03	1.66	4.86	1.84	1.63	4.75	1.92	1.80	4.87	-5.82	-5.08	-2.43	2.44	24
UNII8	6745	159	1.96	1.35	4.68	1.69	1.27	4.50	1.49	1.42	4.47	-5.63	-5.26	-2.43	2.25	24
	6905	191	2.12	1.77	4.96	1.42	1.64	4.54	0.84	1.59	4.24	-5.63	-5.26	-2.43	2.53	24

Mode : EHT320(80MH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.99	5.45	8.74	5.71	5.19	8.47	5.49	5.05	8.29	-3.76	-4.02	-0.88	7.86	24
	6265	63	5.43	5.19	8.32	5.14	4.88	8.02	5.06	4.94	8.01	-3.76	-4.02	-0.88	7.44	24
UNII6	6425	95	5.03	5.47	8.26	4.82	5.13	7.99	5.01	5.04	8.04	-5.82	-5.08	-2.43	5.83	24
	6585	127	5.44	4.72	8.11	5.27	4.72	8.01	5.36	4.88	8.14	-5.82	-5.08	-2.43	5.71	24
UNII8	6745	159	5.33	4.57	7.98	5.04	4.52	7.80	4.84	4.66	7.76	-5.63	-5.26	-2.43	5.55	24
	6905	191	5.62	4.84	8.26	4.95	4.66	7.82	4.35	4.61	7.49	-5.63	-5.26	-2.43	5.83	24

Mode : EHT320(80MH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.62	11.44	14.54	11.64	11.45	14.55	11.71	11.47	14.60	-3.76	-4.02	-0.88	13.72	24
	6265	63	11.17	11.41	14.30	11.20	11.45	14.34	11.19	11.45	14.33	-3.76	-4.02	-0.88	13.46	24
UNII6	6425	95	11.88	12.48	15.20	11.88	12.51	15.22	11.90	12.54	15.24	-5.82	-5.08	-2.43	12.81	24
	6585	127	12.39	12.04	15.23	12.36	12.00	15.19	12.29	11.95	15.13	-5.82	-5.08	-2.43	12.80	24
UNII8	6745	159	12.19	11.79	15.01	12.14	11.79	14.98	12.24	11.75	15.01	-5.63	-5.26	-2.43	12.58	24
	6905	191	12.04	12.39	15.23	12.18	12.42	15.31	12.37	12.43	15.41	-5.63	-5.26	-2.43	12.98	24

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	1.82	1.93	4.89	1.62	1.81	4.73	1.36	1.67	4.53	-3.76	-4.02	-0.88	4.01	24
	6265	63	1.57	2.04	4.83	1.59	1.84	4.73	1.74	1.87	4.81	-3.76	-4.02	-0.88	3.95	24
UNII6	6425	95	1.63	2.20	4.93	1.53	2.08	4.82	1.64	1.90	4.78	-5.82	-5.08	-2.43	2.50	24
	6585	127	2.05	1.93	5.00	1.95	1.85	4.91	1.75	2.04	4.91	-5.82	-5.08	-2.43	2.57	24
UNII8	6745	159	1.48	1.61	4.56	1.12	1.66	4.41	0.67	1.80	4.28	-5.63	-5.26	-2.43	2.13	24
	6905	191	1.49	2.03	4.78	0.88	1.94	4.45	0.37	1.81	4.16	-5.63	-5.26	-2.43	2.35	24

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.36	5.19	8.28	5.19	5.05	8.13	4.97	4.91	7.95	-3.76	-4.02	-0.88	7.40	24
	6265	63	5.03	4.99	8.02	5.04	4.82	7.94	5.15	4.84	8.01	-3.76	-4.02	-0.88	7.14	24
UNII6	6425	95	5.13	5.19	8.17	5.00	5.06	8.04	5.13	4.90	8.03	-5.82	-5.08	-2.43	5.74	24
	6585	127	5.52	4.97	8.26	5.42	4.94	8.20	5.22	5.14	8.19	-5.82	-5.08	-2.43	5.83	24
UNII8	6745	159	4.89	4.75	7.83	4.53	4.88	7.72	4.08	4.93	7.54	-5.63	-5.26	-2.43	5.40	24
	6905	191	4.94	5.03	8.00	4.40	4.89	7.66	3.84	4.81	7.37	-5.63	-5.26	-2.43	5.57	24

Mode : EHT320(80HH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.15	11.18	14.18	11.18	11.18	14.19	11.20	11.23	14.23	-3.76	-4.02	-0.88	13.35	24
	6265	63	11.18	11.25	14.22	11.12	11.26	14.20	11.09	11.26	14.18	-3.76	-4.02	-0.88	13.34	24
UNII6	6425	95	12.05	12.25	15.16	12.11	12.25	15.19	12.05	12.31	15.19	-5.82	-5.08	-2.43	12.76	24
	6585	127	12.38	12.14	15.28	12.39	12.16	15.29	12.42	12.08	15.26	-5.82	-5.08	-2.43	12.86	24
UNII8	6745	159	11.49	12.04	14.78	11.53	12.04	14.80	11.71	12.02	14.88	-5.63	-5.26	-2.43	12.45	24
	6905	191	10.79	12.07	14.49	10.93	12.08	14.55	11.03	12.10	14.61	-5.63	-5.26	-2.43	12.18	24

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.04	13.87	16.96	14.01	13.82	16.93	14.05	13.84	16.95	-3.76	-4.02	-0.88	16.08	24
	6265	63	14.04	14.17	17.12	14.15	14.19	17.18	14.30	14.28	17.30	-3.76	-4.02	-0.88	16.42	24
UNII6	6425	95	14.84	15.66	18.28	14.85	15.66	18.29	14.86	15.72	18.32	-5.82	-5.08	-2.43	15.89	24
	6585	127	15.13	14.89	18.02	15.13	14.97	18.06	15.04	15.05	18.06	-5.82	-5.08	-2.43	15.63	24
UNII8	6745	159	15.28	14.57	17.95	15.25	14.56	17.93	15.27	14.48	17.90	-5.63	-5.26	-2.43	15.52	24
	6905	191	12.54	11.42	15.03	12.58	11.41	15.04	12.81	11.29	15.12	-5.63	-5.26	-2.43	12.69	24

Mode : EHT320(160U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	14.19	14.32	17.26	14.32	14.34	17.34	14.48	14.43	17.46	-3.76	-4.02	-0.88	16.58	24
	6265	63	14.08	14.12	17.11	14.15	14.14	17.15	14.14	14.21	17.19	-3.76	-4.02	-0.88	16.31	24
UNII6	6425	95	14.99	15.18	18.09	14.91	15.29	18.11	14.92	15.33	18.14	-5.82	-5.08	-2.43	15.71	24
	6585	127	15.33	15.12	18.24	15.29	15.01	18.16	15.31	14.95	18.14	-5.82	-5.08	-2.43	15.81	24
UNII8	6745	159	14.69	15.04	17.88	14.84	14.98	17.92	15.03	14.92	17.98	-5.63	-5.26	-2.43	15.55	24
	6905	191	10.83	11.93	14.42	11.18	11.92	14.58	11.50	12.00	14.77	-5.63	-5.26	-2.43	12.34	24

Mode : EHT320 3x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	16.14	15.81	18.99	16.19	15.86	19.04	16.41	15.98	19.21	-3.76	-4.02	-0.88	18.33	24
	6265	63	15.75	15.85	18.81	15.96	15.99	18.99	16.06	16.06	19.07	-3.76	-4.02	-0.88	18.19	24
UNII6	6425	95	15.88	16.34	19.13	15.94	16.38	19.18	15.82	16.46	19.16	-5.82	-5.08	-2.43	16.75	24
	6585	127	16.17	15.91	19.06	16.24	16.03	19.15	16.13	15.95	19.05	-5.82	-5.08	-2.43	16.72	24
UNII8	6745	159	15.95	15.84	18.90	16.00	15.81	18.92	16.13	15.64	18.90	-5.63	-5.26	-2.43	16.49	24
	6905	191	11.42	11.51	14.48	11.58	11.47	14.54	12.17	11.47	14.84	-5.63	-5.26	-2.43	12.41	24

Mode : EHT320 2x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	16.39	16.05	19.23	16.46	16.12	19.30	16.30	16.03	19.17	-3.76	-4.02	-0.88	18.42	24
	6265	63	15.92	16.15	19.05	16.13	16.27	19.21	15.82	16.11	18.98	-3.76	-4.02	-0.88	18.33	24
UNII6	6425	95	15.86	16.62	19.27	15.89	16.68	19.31	15.89	16.51	19.22	-5.82	-5.08	-2.43	16.88	24
	6585	127	16.16	16.07	19.13	16.16	16.08	19.13	16.24	16.03	19.15	-5.82	-5.08	-2.43	16.72	24
UNII8	6745	159	16.22	15.78	19.02	16.25	15.73	19.01	16.12	15.93	19.04	-5.63	-5.26	-2.43	16.61	24
	6905	191	12.15	11.67	14.93	12.53	11.62	15.11	11.76	11.72	14.75	-5.63	-5.26	-2.43	12.68	24

Mode : EHT320 3x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	16.15	15.83	19.01	16.13	15.88	19.02	16.30	15.91	19.12	-3.76	-4.02	-0.88	18.24	24
	6265	63	15.84	15.99	18.93	15.93	16.05	19.00	15.93	16.07	19.01	-3.76	-4.02	-0.88	18.13	24
UNII6	6425	95	15.81	16.39	19.12	15.82	16.46	19.16	15.81	16.53	19.19	-5.82	-5.08	-2.43	16.76	24
	6585	127	16.11	15.94	19.04	16.15	16.02	19.10	16.14	16.00	19.08	-5.82	-5.08	-2.43	16.67	24
UNII8	6745	159	16.01	15.80	18.91	16.00	15.80	18.91	16.10	15.75	18.94	-5.63	-5.26	-2.43	16.51	24
	6905	191	11.68	11.61	14.66	11.84	11.54	14.71	12.09	11.59	14.86	-5.63	-5.26	-2.43	12.43	24

10.3.2 E.I.R.P Output Power(Standard client)

Standard client Limit : 30 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	1.69	1.42	4.57	1.30	0.96	4.14	1.57	1.25	4.42	-3.76	-4.02	-0.88	3.69	30
	6175	45	13.70	13.83	16.78	13.30	13.44	16.38	13.63	13.76	16.70	-3.76	-4.02	-0.88	15.90	30
	6415	93	12.64	13.65	16.18	12.32	13.27	15.83	12.66	13.68	16.21	-3.76	-4.02	-0.88	15.33	30
UNII7	6535	117	12.67	13.16	15.93	12.28	12.81	15.56	12.62	13.17	15.91	-5.82	-5.08	-2.43	13.50	30
	6695	149	13.07	12.86	15.98	12.65	12.53	15.60	13.00	12.92	15.97	-5.82	-5.08	-2.43	13.55	30
	6855	181	13.50	12.92	16.23	13.06	12.66	15.88	13.33	13.12	16.24	-5.82	-5.08	-2.43	13.81	30
Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	3.55	3.38	6.47	3.30	3.16	6.24	3.45	3.29	6.38	-3.76	-4.02	-0.88	5.59	30
	6175	45	13.67	13.88	16.79	13.44	13.69	16.58	13.59	13.82	16.72	-3.76	-4.02	-0.88	15.91	30
	6415	93	12.65	13.66	16.19	12.46	13.47	16.01	12.68	13.67	16.21	-3.76	-4.02	-0.88	15.33	30
UNII7	6535	117	12.67	13.22	15.96	12.42	13.00	15.73	12.61	13.20	15.93	-5.82	-5.08	-2.43	13.53	30
	6695	149	13.09	12.87	15.99	12.82	12.49	15.67	13.00	12.82	15.92	-5.82	-5.08	-2.43	13.56	30
	6855	181	13.51	12.84	16.20	13.26	12.67	15.99	13.33	12.99	16.17	-5.82	-5.08	-2.43	13.77	30
Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	4.90	4.83	7.87	-	-	-	4.83	4.76	7.80	-3.76	-4.02	-0.88	6.99	30
	6175	45	13.54	13.63	16.60	-	-	-	13.47	13.56	16.53	-3.76	-4.02	-0.88	15.72	30
	6415	93	12.49	13.46	16.01	-	-	-	12.51	13.47	16.03	-3.76	-4.02	-0.88	15.15	30
UNII7	6535	117	12.51	12.97	15.75	-	-	-	12.44	12.98	15.73	-5.82	-5.08	-2.43	13.32	30
	6695	149	12.91	12.62	15.78	-	-	-	12.86	12.69	15.79	-5.82	-5.08	-2.43	13.36	30
	6855	181	13.35	12.77	16.08	-	-	-	13.23	12.88	16.07	-5.82	-5.08	-2.43	13.65	30
Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dB]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	6.69	6.21	9.47	-	-	-	-3.76	-4.02	-0.88	8.59	30
	6175	45	-	-	-	16.39	16.19	19.30	-	-	-	-3.76	-4.02	-0.88	18.42	30
	6415	93	-	-	-	15.87	16.76	19.35	-	-	-	-3.76	-4.02	-0.88	18.47	30
UNII7	6535	117	-	-	-	15.83	16.30	19.08	-	-	-	-5.82	-5.08	-2.43	16.65	30
	6695	149	-	-	-	16.10	16.11	19.11	-	-	-	-5.82	-5.08	-2.43	16.68	30
	6855	181	-	-	-	16.48	16.25	19.37	-	-	-	-5.82	-5.08	-2.43	16.94	30

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	6.82	6.19	9.53	-	-	-	-3.76	-4.02	-0.88	8.65	30
	6175	45	-	-	-	15.99	15.83	18.92	-	-	-	-3.76	-4.02	-0.88	18.04	30
	6415	93	-	-	-	15.45	16.40	18.96	-	-	-	-3.76	-4.02	-0.88	18.08	30
UNII7	6535	117	-	-	-	15.47	15.90	18.70	-	-	-	-5.82	-5.08	-2.43	16.27	30
	6695	149	-	-	-	15.75	15.70	18.73	-	-	-	-5.82	-5.08	-2.43	16.30	30
	6855	181	-	-	-	16.14	15.88	19.03	-	-	-	-5.82	-5.08	-2.43	16.60	30

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.56	13.49	16.53	13.42	13.29	16.37	13.49	13.40	16.46	-3.76	-4.02	-0.88	15.65	30
	6165	43	13.56	13.68	16.63	13.32	13.52	16.43	13.37	13.54	16.47	-3.76	-4.02	-0.88	15.75	30
	6405	91	12.56	13.48	16.05	12.45	13.38	15.95	12.64	13.53	16.12	-3.76	-4.02	-0.88	15.24	30
UNII7	6565	123	12.81	12.56	15.70	12.73	12.34	15.55	12.86	12.46	15.68	-5.82	-5.08	-2.43	13.27	30
	6685	147	12.77	12.68	15.74	12.66	12.48	15.58	12.70	12.68	15.70	-5.82	-5.08	-2.43	13.31	30
	6845	179	13.53	12.64	16.12	13.14	12.56	15.87	13.11	12.86	16.00	-5.82	-5.08	-2.43	13.69	30

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	13.70	13.49	16.61	13.46	13.27	16.38	13.60	13.40	16.51	-3.76	-4.02	-0.88	15.73	30
	6165	43	13.69	13.66	16.69	13.43	13.43	16.44	13.49	13.53	16.52	-3.76	-4.02	-0.88	15.81	30
	6405	91	12.63	13.48	16.09	12.49	13.31	15.93	12.64	13.50	16.10	-3.76	-4.02	-0.88	15.22	30
UNII7	6565	123	12.85	12.58	15.72	12.74	12.31	15.54	12.88	12.48	15.70	-5.82	-5.08	-2.43	13.29	30
	6685	147	12.80	12.66	15.74	12.65	12.44	15.56	12.75	12.68	15.73	-5.82	-5.08	-2.43	13.31	30
	6845	179	13.51	12.67	16.12	13.15	12.58	15.89	13.14	12.87	16.02	-5.82	-5.08	-2.43	13.69	30

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.69	13.47	16.59	13.48	13.26	16.38	13.63	13.42	16.54	-3.76	-4.02	-0.88	15.71	30
	6165	43	13.74	13.67	16.72	13.52	13.50	16.52	13.54	13.58	16.57	-3.76	-4.02	-0.88	15.84	30
	6405	91	12.65	13.47	16.09	12.49	13.32	15.93	12.64	13.51	16.11	-3.76	-4.02	-0.88	15.23	30
UNII7	6565	123	12.81	12.54	15.69	12.66	12.38	15.53	12.87	12.44	15.67	-5.82	-5.08	-2.43	13.26	30
	6685	147	12.77	12.62	15.71	12.59	12.47	15.54	12.73	12.63	15.69	-5.82	-5.08	-2.43	13.28	30
	6845	179	13.47	12.65	16.09	13.19	12.57	15.90	13.10	12.82	15.98	-5.82	-5.08	-2.43	13.66	30

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	16.54	16.41	19.49	-	-	-	16.54	16.41	19.49	-3.76	-4.02	-0.88	18.61	30
	6165	43	16.49	16.17	19.34	-	-	-	16.37	16.09	19.24	-3.76	-4.02	-0.88	18.46	30
	6405	91	15.95	16.63	19.32	-	-	-	15.98	16.68	19.35	-3.76	-4.02	-0.88	18.47	30
UNII7	6565	123	16.04	15.80	18.93	-	-	-	16.11	15.75	18.95	-5.82	-5.08	-2.43	16.52	30
	6685	147	16.04	15.98	19.02	-	-	-	15.99	15.96	18.99	-5.82	-5.08	-2.43	16.59	30
	6845	179	16.61	16.08	19.36	-	-	-	16.40	16.13	19.28	-5.82	-5.08	-2.43	16.93	30

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	16.56	16.39	19.49	-	-	-	-3.76	-4.02	-0.88	18.61	30
	6165	43	-	-	-	16.47	16.11	19.30	-	-	-	-3.76	-4.02	-0.88	18.42	30
	6405	91	-	-	-	15.97	16.65	19.33	-	-	-	-3.76	-4.02	-0.88	18.45	30
UNII7	6565	123	-	-	-	16.10	15.78	18.96	-	-	-	-5.82	-5.08	-2.43	16.53	30
	6685	147	-	-	-	16.04	15.98	19.02	-	-	-	-5.82	-5.08	-2.43	16.59	30
	6845	179	-	-	-	16.51	16.13	19.33	-	-	-	-5.82	-5.08	-2.43	16.90	30

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	16.24	16.05	19.16	-	-	-	-3.76	-4.02	-0.88	18.28	30
	6165	43	-	-	-	16.15	15.77	18.97	-	-	-	-3.76	-4.02	-0.88	18.09	30
	6405	91	-	-	-	15.65	16.33	19.01	-	-	-	-3.76	-4.02	-0.88	18.13	30
UNII7	6565	123	-	-	-	15.84	15.49	18.68	-	-	-	-5.82	-5.08	-2.43	16.25	30
	6685	147	-	-	-	15.79	15.68	18.74	-	-	-	-5.82	-5.08	-2.43	16.31	30
	6845	179	-	-	-	16.30	15.84	19.09	-	-	-	-5.82	-5.08	-2.43	16.66	30

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	13.54	13.23	16.40	13.49	13.20	16.36	13.46	13.15	16.32	-3.76	-4.02	-0.88	15.52	30
	6145	39	13.55	13.36	16.47	13.41	13.33	16.38	13.16	13.12	16.15	-3.76	-4.02	-0.88	15.59	30
	6385	87	12.43	13.33	15.91	12.45	13.16	15.83	12.48	13.19	15.86	-3.76	-4.02	-0.88	15.03	30
UNII7	6625	135	12.83	12.23	15.55	12.88	12.45	15.68	12.92	12.60	15.77	-5.82	-5.08	-2.43	13.34	30
	6705	151	12.76	12.31	15.55	12.68	12.34	15.52	12.47	12.52	15.51	-5.82	-5.08	-2.43	13.12	30
	6785	167	12.94	12.13	15.56	12.85	12.22	15.55	12.54	12.38	15.48	-5.82	-5.08	-2.43	13.13	30

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	13.62	13.35	16.50	13.57	13.28	16.44	13.55	13.27	16.42	-3.76	-4.02	-0.88	15.62	30
	6145	39	13.67	13.53	16.61	13.51	13.47	16.50	13.28	13.28	16.29	-3.76	-4.02	-0.88	15.73	30
	6385	87	12.52	13.48	16.03	12.57	13.27	15.95	12.66	13.34	16.02	-3.76	-4.02	-0.88	15.15	30
UNII7	6625	135	12.96	12.40	15.70	12.98	12.60	15.80	13.07	12.75	15.93	-5.82	-5.08	-2.43	13.50	30
	6705	151	12.91	12.48	15.71	12.81	12.47	15.65	12.59	12.68	15.64	-5.82	-5.08	-2.43	13.28	30
	6785	167	13.04	12.26	15.68	12.97	12.35	15.68	12.73	12.54	15.65	-5.82	-5.08	-2.43	13.25	30

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	13.59	13.34	16.48	13.53	13.27	16.41	13.50	13.29	16.41	-3.76	-4.02	-0.88	15.60	30
	6145	39	13.64	13.51	16.58	13.47	13.43	16.46	13.25	13.30	16.29	-3.76	-4.02	-0.88	15.70	30
	6385	87	12.48	13.43	15.99	12.53	13.27	15.92	12.58	13.29	15.96	-3.76	-4.02	-0.88	15.11	30
UNII7	6625	135	12.92	12.38	15.67	12.95	12.56	15.77	13.06	12.74	15.91	-5.82	-5.08	-2.43	13.48	30
	6705	151	12.86	12.44	15.67	12.79	12.45	15.63	12.60	12.59	15.61	-5.82	-5.08	-2.43	13.24	30
	6785	167	13.03	12.24	15.66	12.91	12.33	15.64	12.71	12.48	15.61	-5.82	-5.08	-2.43	13.23	30

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	16.61	16.32	19.48	16.61	16.31	19.47	16.60	16.35	19.49	-3.76	-4.02	-0.88	18.61	30
	6145	39	16.59	16.07	19.35	16.54	16.04	19.31	16.35	15.97	19.17	-3.76	-4.02	-0.88	18.47	30
	6385	87	15.93	16.67	19.32	15.95	16.57	19.28	16.04	16.61	19.35	-3.76	-4.02	-0.88	18.47	30
UNII7	6625	135	16.34	15.85	19.11	16.36	15.96	19.17	16.43	16.14	19.30	-5.82	-5.08	-2.43	16.87	30
	6705	151	16.18	15.87	19.04	16.16	15.87	19.03	15.97	15.99	18.99	-5.82	-5.08	-2.43	16.61	30
	6785	167	16.34	15.83	19.10	16.32	15.84	19.10	16.09	15.91	19.01	-5.82	-5.08	-2.43	16.67	30

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	16.63	16.34	19.50	-	-	-	16.61	16.36	19.50	-3.76	-4.02	-0.88	18.62	30
	6145	39	16.55	16.09	19.33	-	-	-	16.39	16.05	19.23	-3.76	-4.02	-0.88	18.45	30
	6385	87	15.92	16.64	19.31	-	-	-	16.03	16.61	19.34	-3.76	-4.02	-0.88	18.46	30
UNII7	6625	135	16.27	15.90	19.10				16.35	16.11	19.24	-5.82	-5.08	-2.43	16.81	30
	6705	151	16.09	15.88	19.00	-	-	-	15.97	16.01	19.00	-5.82	-5.08	-2.43	16.57	30
	6785	167	16.28	15.84	19.07				16.14	15.97	19.06	-5.82	-5.08	-2.43	16.64	30

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-	-	-	16.49	16.24	19.38	-	-	-	-3.76	-4.02	-0.88	18.50	30
	6145	39	-	-	-	16.33	15.97	19.16	-	-	-	-3.76	-4.02	-0.88	18.28	30
	6385	87	-	-	-	15.85	16.55	19.23	-	-	-	-3.76	-4.02	-0.88	18.35	30
UNII7	6625	135				16.20	15.94	19.08				-5.82	-5.08	-2.43	16.65	30
	6705	151	-	-	-	15.95	15.84	18.90	-	-	-	-5.82	-5.08	-2.43	16.47	30
	6785	167				16.10	15.81	18.97				-5.82	-5.08	-2.43	16.54	30

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-	-	-	16.23	15.99	19.12	-	-	-	-3.76	-4.02	-0.88	18.24	30
	6145	39	-	-	-	16.11	15.72	18.93	-	-	-	-3.76	-4.02	-0.88	18.05	30
	6385	87	-	-	-	15.63	16.31	18.99	-	-	-	-3.76	-4.02	-0.88	18.11	30
UNII7	6625	135				15.98	15.68	18.84				-5.82	-5.08	-2.43	16.41	30
	6705	151	-	-	-	15.71	15.61	18.67	-	-	-	-5.82	-5.08	-2.43	16.24	30
	6785	167				15.85	15.55	18.71				-5.82	-5.08	-2.43	16.28	30

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.13	13.19	16.17	13.40	13.46	16.44	13.39	13.48	16.45	-3.76	-4.02	-0.88	15.57	30
	6185	47	13.29	13.31	16.31	13.33	13.47	16.41	13.07	13.31	16.20	-3.76	-4.02	-0.88	15.53	30
	6345	79	12.43	13.13	15.81	12.44	13.07	15.78	12.39	13.14	15.80	-3.76	-4.02	-0.88	14.93	30
UNII7	6665	143	12.15	11.53	14.86	12.33	11.90	15.13	12.43	12.12	15.29	-5.82	-5.08	-2.43	12.86	30

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.08	13.22	16.16	13.25	13.42	16.35	13.30	13.48	16.40	-3.76	-4.02	-0.88	15.52	30
	6185	47	13.21	13.32	16.28	13.17	13.44	16.32	13.13	13.35	16.25	-3.76	-4.02	-0.88	15.44	30
	6345	79	12.57	13.18	15.90	12.52	13.14	15.85	12.47	13.16	15.84	-3.76	-4.02	-0.88	15.02	30
UNII7	6665	143	12.34	11.54	14.97	12.52	11.90	15.23	12.59	12.09	15.36	-5.82	-5.08	-2.43	12.93	30

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.43	13.37	16.41	13.55	13.51	16.54	13.59	13.53	16.57	-3.76	-4.02	-0.88	15.69	30
	6185	47	13.56	13.46	16.52	13.49	13.49	16.50	13.32	13.36	16.35	-3.76	-4.02	-0.88	15.64	30
	6345	79	12.70	13.19	15.97	12.61	13.17	15.91	12.56	13.19	15.90	-3.76	-4.02	-0.88	15.09	30
UNII7	6665	143	12.42	11.60	15.04	12.58	11.94	15.28	12.67	12.06	15.39	-5.82	-5.08	-2.43	12.96	30

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.34	16.09	19.23	16.38	16.16	19.28	16.47	16.23	19.36	-3.76	-4.02	-0.88	18.48	30
	6185	47	16.34	15.96	19.17	16.26	15.91	19.10	16.12	15.91	19.03	-3.76	-4.02	-0.88	18.29	30
	6345	79	16.09	16.41	19.26	16.00	16.33	19.18	15.96	16.39	19.19	-3.76	-4.02	-0.88	18.38	30
UNII7	6665	143	15.79	15.22	18.52	15.84	15.33	18.60	15.99	15.56	18.79	-5.82	-5.08	-2.43	16.36	30

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.35	16.07	19.22	-	-	-	16.44	16.19	19.33	-3.76	-4.02	-0.88	18.45	30
	6185	47	16.29	15.88	19.10	-	-	-	16.21	15.91	19.07	-3.76	-4.02	-0.88	18.22	30
	6345	79	15.98	16.34	19.18	-	-	-	15.98	16.42	19.21	-3.76	-4.02	-0.88	18.33	30
UNII7	6665	143	15.81	15.25	18.55	-	-	-	15.93	15.52	18.74	-5.82	-5.08	-2.43	16.31	30

Mode : EHT160(80L) 996T

Model: ZNF100(S02/S03)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	16.28	16.10	19.20	-	-	-	-3.76	-4.02	-0.88	18.32	30
	6185	47	-	-	-	16.35	16.13	19.25	-	-	-	-3.76	-4.02	-0.88	18.37	30
	6345	79	-	-	-	16.12	16.53	19.34	-	-	-	-3.76	-4.02	-0.88	18.46	30
UNII7	6665	143	-	-	-	15.99	15.62	18.82	-	-	-	-5.82	-5.08	-2.43	16.39	30

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.47	13.49	16.49	13.36	13.49	16.44	13.12	13.27	16.20	-3.76	-4.02	-0.88	15.61	30
	6185	47	13.16	13.35	16.27	12.97	13.24	16.12	12.64	12.95	15.81	-3.76	-4.02	-0.88	15.39	30
	6345	79	12.46	13.08	15.79	12.56	12.91	15.75	12.48	12.88	15.70	-3.76	-4.02	-0.88	14.91	30
UNII7	6665	143	12.67	12.06	15.38	12.64	12.08	15.38	12.34	12.19	15.27	-5.82	-5.08	-2.43	12.95	30

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.48	13.45	16.48	13.40	13.45	16.44	13.12	13.22	16.18	-3.76	-4.02	-0.88	15.60	30
	6185	47	13.15	13.31	16.24	12.97	13.21	16.10	12.61	12.96	15.80	-3.76	-4.02	-0.88	15.36	30
	6345	79	12.47	13.07	15.79	12.56	12.97	15.78	12.52	12.88	15.72	-3.76	-4.02	-0.88	14.91	30
UNII7	6665	143	12.66	12.03	15.36	12.66	12.07	15.38	12.32	12.18	15.26	-5.82	-5.08	-2.43	12.95	30

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.58	13.59	16.59	13.47	13.55	16.52	13.26	13.39	16.34	-3.76	-4.02	-0.88	15.71	30
	6185	47	13.24	13.39	16.33	13.05	13.33	16.20	12.79	13.10	15.96	-3.76	-4.02	-0.88	15.45	30
	6345	79	12.54	13.17	15.88	12.68	13.03	15.87	12.64	12.97	15.82	-3.76	-4.02	-0.88	15.00	30
UNII7	6665	143	12.78	12.15	15.48	12.74	12.17	15.48	12.47	12.28	15.39	-5.82	-5.08	-2.43	13.05	30

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.45	16.30	19.38	16.37	16.30	19.34	16.29	16.26	19.29	-3.76	-4.02	-0.88	18.50	30
	6185	47	16.13	16.03	19.09	16.01	15.96	19.00	15.75	15.84	18.81	-3.76	-4.02	-0.88	18.21	30
	6345	79	15.95	16.43	19.21	15.95	16.32	19.15	16.06	16.35	19.22	-3.76	-4.02	-0.88	18.34	30
UNII7	6665	143	16.13	15.77	18.96	16.12	15.75	18.95	15.96	15.88	18.93	-5.82	-5.08	-2.43	16.53	30

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.48	16.39	19.45	-	-	-	16.37	16.35	19.37	-3.76	-4.02	-0.88	18.57	30
	6185	47	16.08	16.03	19.07	-	-	-	15.84	15.90	18.88	-3.76	-4.02	-0.88	18.19	30
	6345	79	15.97	16.41	19.20	-	-	-	16.08	16.40	19.25	-3.76	-4.02	-0.88	18.37	30
UNII7	6665	143	16.12	15.79	18.96	-	-	-	16.01	15.91	18.97	-5.82	-5.08	-2.43	16.54	30

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	16.37	16.34	19.36	-	-	-	-3.76	-4.02	-0.88	18.48	30
	6185	47	-	-	-	15.88	15.95	18.93	-	-	-	-3.76	-4.02	-0.88	18.05	30
	6345	79	-	-	-	16.00	16.36	19.19	-	-	-	-3.76	-4.02	-0.88	18.31	30
UNII7	6665	143	-	-	-	16.04	15.84	18.95	-	-	-	-5.82	-5.08	-2.43	16.52	30

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	15.95	15.73	18.85	-	-	-	-3.76	-4.02	-0.88	17.97	30
	6185	47	-	-	-	15.69	15.45	18.58	-	-	-	-3.76	-4.02	-0.88	17.70	30
	6345	79	-	-	-	15.50	15.92	18.72	-	-	-	-3.76	-4.02	-0.88	17.84	30
UNII7	6665	143	-	-	-	15.48	15.06	18.29	-	-	-	-5.82	-5.08	-2.43	15.86	30

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	16.54	16.35	19.46	-	-	-	-3.76	-4.02	-0.88	18.58	30
	6185	47	-	-	-	16.26	16.05	19.17	-	-	-	-3.76	-4.02	-0.88	18.29	30
	6345	79	-	-	-	16.13	16.50	19.33	-	-	-	-3.76	-4.02	-0.88	18.45	30
UNII7	6665	143	-	-	-	16.09	15.70	18.91	-	-	-	-5.82	-5.08	-2.43	16.48	30

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	13.23	13.32	16.28	13.44	13.43	16.44	13.53	13.52	16.54	-3.76	-4.02	-0.88	15.66	30
	6265	63	13.40	13.47	16.44	13.31	13.51	16.42	13.21	13.51	16.37	-3.76	-4.02	-0.88	15.56	30
UNII5 52T	6105	31	13.28	13.44	16.37	13.53	13.29	16.42	13.58	13.38	16.49	-3.76	-4.02	-0.88	15.61	30
	6265	63	13.51	13.32	16.42	13.43	13.39	16.42	13.30	13.29	16.30	-3.76	-4.02	-0.88	15.54	30
UNII5 106T	6105	31	13.47	13.24	16.37	13.56	13.34	16.46	13.57	13.42	16.51	-3.76	-4.02	-0.88	15.63	30
	6265	63	13.53	13.39	16.47	13.39	13.38	16.40	13.24	13.34	16.30	-3.76	-4.02	-0.88	15.59	30
UNII5 242T	6105	31	16.52	15.99	19.27	16.51	16.04	19.29	16.52	16.08	19.32	-3.76	-4.02	-0.88	18.44	30
	6265	63	16.53	16.43	19.49	16.44	16.37	19.42	16.26	16.33	19.30	-3.76	-4.02	-0.88	18.61	30
UNII5 484T	6105	31	16.51	16.05	19.29	-	-	-	16.54	16.11	19.34	-3.76	-4.02	-0.88	18.46	30
	6265	63	16.49	16.44	19.47	-	-	-	16.33	16.38	19.36	-3.76	-4.02	-0.88	18.59	30
UNII5 996T	6105	31	-	-	-	16.47	16.06	19.28	-	-	-	-3.76	-4.02	-0.88	18.40	30
	6265	63	-	-	-	16.38	16.37	19.39	-	-	-	-3.76	-4.02	-0.88	18.51	30

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	13.38	13.29	16.34	13.29	13.21	16.26	13.38	13.37	16.38	-3.76	-4.02	-0.88	15.50	30
	6265	63	13.01	13.11	16.07	12.75	12.97	15.87	12.86	13.04	15.96	-3.76	-4.02	-0.88	15.19	30
UNII5 52T	6105	31	13.42	13.22	16.33	13.33	13.16	16.26	13.40	13.34	16.38	-3.76	-4.02	-0.88	15.50	30
	6265	63	13.11	13.12	16.12	12.85	13.03	15.95	12.85	13.10	15.99	-3.76	-4.02	-0.88	15.24	30
UNII5 106T	6105	31	13.44	13.27	16.37	13.32	13.17	16.25	13.37	13.31	16.35	-3.76	-4.02	-0.88	15.49	30
	6265	63	13.09	13.12	16.12	12.90	13.03	15.97	12.87	13.08	15.99	-3.76	-4.02	-0.88	15.24	30
UNII5 242T	6105	31	16.49	15.98	19.25	16.44	15.96	19.22	16.28	15.90	19.10	-3.76	-4.02	-0.88	18.37	30
	6265	63	16.16	16.18	19.18	16.05	16.13	19.10	15.79	15.98	18.90	-3.76	-4.02	-0.88	18.30	30
UNII5 484T	6105	31	16.47	16.01	19.25	-	-	-	16.35	15.96	19.17	-3.76	-4.02	-0.88	18.37	30
	6265	63	16.09	16.16	19.14	-	-	-	15.87	16.07	18.98	-3.76	-4.02	-0.88	18.26	30
UNII5 996T	6105	31	-	-	-	16.39	15.93	19.18	-	-	-	-3.76	-4.02	-0.88	18.30	30
	6265	63	-	-	-	15.97	16.09	19.04	-	-	-	-3.76	-4.02	-0.88	18.16	30

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	13.37	13.33	16.36	13.25	13.30	16.28	12.65	12.78	15.73	-3.76	-4.02	-0.88	15.48	30
	6265	63	12.88	13.05	15.98	12.71	12.96	15.85	12.22	12.59	15.42	-3.76	-4.02	-0.88	15.10	30
UNII5 52T	6105	31	13.31	13.34	16.34	13.17	13.32	16.25	12.62	12.85	15.75	-3.76	-4.02	-0.88	15.46	30
	6265	63	12.82	13.06	15.95	12.65	12.96	15.82	12.28	12.58	15.45	-3.76	-4.02	-0.88	15.07	30
UNII5 106T	6105	31	13.34	13.28	16.32	13.12	13.22	16.18	12.70	12.83	15.77	-3.76	-4.02	-0.88	15.44	30
	6265	63	12.78	13.01	15.91	12.62	12.89	15.76	12.35	12.67	15.52	-3.76	-4.02	-0.88	15.03	30
UNII5 242T	6105	31	16.16	15.86	19.02	16.05	15.84	18.95	15.84	15.74	18.80	-3.76	-4.02	-0.88	18.14	30
	6265	63	15.63	15.89	18.77	15.54	15.80	18.68	15.47	15.81	18.66	-3.76	-4.02	-0.88	17.89	30
UNII5 484T	6105	31	16.15	15.85	19.01	-	-	-	15.98	15.80	18.90	-3.76	-4.02	-0.88	18.13	30
	6265	63	15.60	15.84	18.73	-	-	-	15.54	15.82	18.69	-3.76	-4.02	-0.88	17.85	30
UNII5 996T	6105	31	-	-	-	15.97	15.79	18.89	-	-	-	-3.76	-4.02	-0.88	18.01	30
	6265	63	-	-	-	15.52	15.78	18.67	-	-	-	-3.76	-4.02	-0.88	17.79	30

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	12.77	12.99	15.89	12.50	12.82	15.68	12.23	12.60	15.43	-3.76	-4.02	-0.88	15.01	30
	6265	63	12.37	12.75	15.58	12.51	12.60	15.56	12.53	12.55	15.55	-3.76	-4.02	-0.88	14.70	30
UNII5 52T	6105	31	12.79	13.02	15.91	12.48	12.89	15.70	12.19	12.67	15.45	-3.76	-4.02	-0.88	15.03	30
	6265	63	12.45	12.79	15.63	12.49	12.61	15.56	12.46	12.58	15.53	-3.76	-4.02	-0.88	14.75	30
UNII5 106T	6105	31	12.73	12.98	15.86	12.46	12.85	15.67	12.29	12.66	15.49	-3.76	-4.02	-0.88	14.98	30
	6265	63	12.41	12.75	15.60	12.51	12.59	15.56	12.47	12.57	15.53	-3.76	-4.02	-0.88	14.72	30
UNII5 242T	6105	31	15.68	15.64	18.67	15.57	15.54	18.57	15.32	15.43	18.39	-3.76	-4.02	-0.88	17.79	30
	6265	63	15.37	15.69	18.54	15.39	15.60	18.51	15.47	15.62	18.56	-3.76	-4.02	-0.88	17.68	30
UNII5 484T	6105	31	15.64	15.64	18.65	-	-	-	15.43	15.48	18.47	-3.76	-4.02	-0.88	17.77	30
	6265	63	15.43	15.63	18.54	-	-	-	15.52	15.62	18.58	-3.76	-4.02	-0.88	17.70	30
UNII5 996T	6105	31	-	-	-	15.50	15.56	18.54	-	-	-	-3.76	-4.02	-0.88	17.66	30
	6265	63	-	-	-	15.42	15.62	18.54	-	-	-	-3.76	-4.02	-0.88	17.66	30

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	-	-	-	16.51	16.04	19.29	-	-	-	-3.76	-4.02	-0.88	18.41	30
	6265	63	-	-	-	16.22	16.25	19.24	-	-	-	-3.76	-4.02	-0.88	18.36	30
UNII5 160U	6105	31	-	-	-	16.47	16.24	19.36	-	-	-	-3.76	-4.02	-0.88	18.48	30
	6265	63	-	-	-	16.12	16.32	19.23	-	-	-	-3.76	-4.02	-0.88	18.35	30

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 4x996T	6105	31	-	-	-	16.87	16.34	19.62	-	-	-	-3.76	-4.02	-0.88	18.74	30
	6265	63	-	-	-	16.47	16.51	19.50	-	-	-	-3.76	-4.02	-0.88	18.62	30
UNII5 SU	6105	31	-	-	-	16.73	16.29	19.52	-	-	-	-3.76	-4.02	-0.88	18.64	30
	6265	63	-	-	-	16.39	16.44	19.43	-	-	-	-3.76	-4.02	-0.88	18.55	30

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	7.86	7.60	10.74	-	-	-	-3.76	-4.02	-0.88	9.86	30
	6175	45	-	-	-	15.98	15.73	18.87	-	-	-	-3.76	-4.02	-0.88	17.99	30
	6415	93	-	-	-	15.44	16.35	18.93	-	-	-	-3.76	-4.02	-0.88	18.05	30
UNII7	6535	117	-	-	-	15.46	15.86	18.68	-	-	-	-5.82	-5.08	-2.43	16.25	30
	6695	149	-	-	-	15.72	15.62	18.68	-	-	-	-5.82	-5.08	-2.43	16.25	30
	6855	181	-	-	-	16.12	15.82	18.98	-	-	-	-5.82	-5.08	-2.43	16.55	30

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	3.42	3.40	6.42	3.29	3.26	6.29	3.35	3.32	6.35	-3.76	-4.02	-0.88	5.54	30
	6175	45	13.52	13.73	16.64	13.42	13.63	16.54	13.47	13.67	16.58	-3.76	-4.02	-0.88	15.76	30
	6415	93	12.55	13.58	16.11	12.44	13.47	16.00	12.54	13.61	16.12	-3.76	-4.02	-0.88	15.24	30
UNII7	6535	117	12.52	13.12	15.84	12.38	13.01	15.72	12.50	13.13	15.84	-5.82	-5.08	-2.43	13.41	30
	6695	149	12.91	12.78	15.85	12.78	12.67	15.74	12.87	12.85	15.87	-5.82	-5.08	-2.43	13.44	30
	6855	181	13.33	12.89	16.13	13.19	12.80	16.01	13.24	12.99	16.13	-5.82	-5.08	-2.43	13.70	30

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	4.94	4.88	7.92	-	-	-	4.89	4.82	7.87	-3.76	-4.02	-0.88	7.04	30
	6165	43	13.61	13.71	16.67	-	-	-	13.56	13.66	16.62	-3.76	-4.02	-0.88	15.79	30
	6405	91	12.51	13.48	16.04	-	-	-	12.54	13.51	16.06	-3.76	-4.02	-0.88	15.18	30
UNII7	6565	123	12.52	12.97	15.76	-	-	-	12.49	12.98	15.75	-5.82	-5.08	-2.43	13.33	30
	6685	147	12.96	12.64	15.81	-	-	-	12.90	12.67	15.80	-5.82	-5.08	-2.43	13.38	30
	6845	179	13.36	12.73	16.07	-	-	-	13.26	12.82	16.06	-5.82	-5.08	-2.43	13.64	30

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.81	13.65	16.74	13.59	13.42	16.52	13.74	13.56	16.66	-3.76	-4.02	-0.88	15.86	30
	6165	43	13.78	13.81	16.80	13.62	13.65	16.64	13.63	13.64	16.65	-3.76	-4.02	-0.88	15.92	30
	6405	91	12.73	13.56	16.18	12.60	13.43	16.05	12.75	13.60	16.21	-3.76	-4.02	-0.88	15.33	30
UNII7	6565	123	12.91	12.65	15.79	12.75	12.49	15.63	12.95	12.55	15.76	-5.82	-5.08	-2.43	13.36	30
	6685	147	12.87	12.71	15.80	12.70	12.59	15.66	12.78	12.72	15.76	-5.82	-5.08	-2.43	13.37	30
	6845	179	13.53	12.72	16.16	13.29	12.66	16.00	13.20	12.85	16.04	-5.82	-5.08	-2.43	13.73	30

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.73	13.49	16.62	13.57	13.34	16.47	13.68	13.45	16.58	-3.76	-4.02	-0.88	15.74	30
	6165	43	13.69	13.67	16.69	13.57	13.54	16.56	13.53	13.58	16.57	-3.76	-4.02	-0.88	15.81	30
	6405	91	12.61	13.44	16.05	12.54	13.38	15.99	12.69	13.53	16.14	-3.76	-4.02	-0.88	15.26	30
UNII7	6565	123	12.87	12.56	15.73	12.73	12.44	15.60	12.92	12.48	15.72	-5.82	-5.08	-2.43	13.30	30
	6685	147	12.80	12.66	15.74	12.66	12.54	15.61	12.75	12.67	15.72	-5.82	-5.08	-2.43	13.31	30
	6845	179	13.44	12.67	16.08	13.22	12.61	15.94	13.14	12.83	16.00	-5.82	-5.08	-2.43	13.65	30

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	13.68	13.44	16.57	13.59	13.35	16.48	13.57	13.42	16.51	-3.76	-4.02	-0.88	15.69	30
	6145	39	13.65	13.60	16.63	13.45	13.49	16.48	13.27	13.37	16.33	-3.76	-4.02	-0.88	15.75	30
	6385	87	12.56	13.53	16.08	12.59	13.32	15.98	12.64	13.39	16.04	-3.76	-4.02	-0.88	15.20	30
UNII7	6625	135	12.93	12.43	15.70	12.93	12.57	15.77	13.06	12.75	15.91	-5.82	-5.08	-2.43	13.48	30
	6705	151	12.89	12.50	15.71	12.77	12.45	15.62	12.62	12.65	15.65	-5.82	-5.08	-2.43	13.28	30
	6785	167	13.04	12.30	15.70	12.93	12.33	15.65	12.72	12.51	15.62	-5.82	-5.08	-2.43	13.27	30

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	13.62	13.38	16.51	13.52	13.31	16.43	13.50	13.32	16.42	-3.76	-4.02	-0.88	15.63	30
	6145	39	13.55	13.51	16.54	13.39	13.44	16.43	13.20	13.35	16.29	-3.76	-4.02	-0.88	15.66	30
	6385	87	12.50	13.50	16.04	12.48	13.30	15.92	12.55	13.33	15.97	-3.76	-4.02	-0.88	15.16	30
UNII7	6625	135	12.82	12.39	15.62	12.84	12.53	15.70	12.97	12.70	15.85	-5.82	-5.08	-2.43	13.42	30
	6705	151	12.79	12.43	15.63	12.70	12.41	15.57	12.52	12.62	15.58	-5.82	-5.08	-2.43	13.20	30
	6785	167	12.93	12.24	15.61	12.85	12.30	15.59	12.66	12.47	15.57	-5.82	-5.08	-2.43	13.18	30

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	16.63	16.40	19.53	16.62	16.42	19.53	16.59	16.36	19.49	-3.76	-4.02	-0.88	18.65	30
	6145	39	16.47	16.12	19.31	16.43	16.13	19.29	16.45	16.14	19.31	-3.76	-4.02	-0.88	18.43	30
	6385	87	16.06	16.64	19.37	15.96	16.68	19.35	15.93	16.65	19.31	-3.76	-4.02	-0.88	18.49	30
UNII7	6625	135	16.39	16.07	19.24	16.28	16.05	19.18	16.21	15.96	19.10	-5.82	-5.08	-2.43	16.81	30
	6705	151	15.98	15.97	18.98	15.97	15.98	18.98	15.99	15.87	18.94	-5.82	-5.08	-2.43	16.55	30
	6785	167	16.14	15.94	19.05	16.12	15.87	19.01	16.18	15.85	19.03	-5.82	-5.08	-2.43	16.62	30

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	13.54	13.44	16.50	13.67	13.58	16.63	13.62	13.58	16.61	-3.76	-4.02	-0.88	15.75	30
	6185	47	13.55	13.52	16.55	13.54	13.55	16.56	13.28	13.44	16.37	-3.76	-4.02	-0.88	15.68	30
	6345	79	12.73	13.31	16.04	12.70	13.24	15.99	12.56	13.22	15.91	-3.76	-4.02	-0.88	15.16	30
UNII7	6665	143	12.45	11.75	15.13	12.55	12.01	15.30	12.65	12.16	15.42	-5.82	-5.08	-2.43	12.99	30

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	13.56	13.48	16.53	13.66	13.59	16.64	13.64	13.66	16.66	-3.76	-4.02	-0.88	15.78	30
	6185	47	13.59	13.56	16.58	13.54	13.60	16.58	13.37	13.49	16.44	-3.76	-4.02	-0.88	15.70	30
	6345	79	12.77	13.31	16.06	12.71	13.27	16.01	12.64	13.26	15.97	-3.76	-4.02	-0.88	15.18	30
UNII7	6665	143	12.47	11.69	15.11	12.58	11.97	15.30	12.69	12.14	15.43	-5.82	-5.08	-2.43	13.00	30

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.60	16.43	19.53	16.60	16.36	19.49	16.58	16.30	19.45	-3.76	-4.02	-0.88	18.65	30
	6185	47	16.47	16.18	19.34	16.40	16.15	19.29	16.45	16.12	19.30	-3.76	-4.02	-0.88	18.46	30
	6345	79	16.10	16.60	19.37	16.15	16.60	19.39	16.15	16.50	19.34	-3.76	-4.02	-0.88	18.51	30
UNII7	6665	143	16.07	15.67	18.89	16.02	15.61	18.83	15.95	15.53	18.75	-5.82	-5.08	-2.43	16.46	30

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.62	13.61	16.62	13.52	13.53	16.53	13.30	13.42	16.37	-3.76	-4.02	-0.88	15.74	30
	6185	47	13.25	13.40	16.33	13.12	13.29	16.21	12.83	13.12	15.99	-3.76	-4.02	-0.88	15.45	30
	6345	79	12.53	13.17	15.87	12.54	13.01	15.79	12.65	13.03	15.86	-3.76	-4.02	-0.88	14.99	30
UNII7	6665	143	12.79	12.14	15.49	12.70	12.16	15.45	12.50	12.27	15.40	-5.82	-5.08	-2.43	13.06	30

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.60	13.65	16.63	13.53	13.57	16.56	13.36	13.46	16.42	-3.76	-4.02	-0.88	15.75	30
	6185	47	13.30	13.46	16.39	13.14	13.36	16.26	12.86	13.17	16.03	-3.76	-4.02	-0.88	15.51	30
	6345	79	12.55	13.20	15.90	12.61	13.01	15.82	12.67	13.00	15.85	-3.76	-4.02	-0.88	15.02	30
UNII7	6665	143	12.75	12.11	15.45	12.71	12.10	15.42	12.49	12.26	15.39	-5.82	-5.08	-2.43	13.02	30

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.48	16.38	19.44	16.46	16.37	19.42	16.46	16.37	19.43	-3.76	-4.02	-0.88	18.56	30
	6185	47	15.97	15.96	18.98	15.96	15.92	18.95	15.99	15.94	18.98	-3.76	-4.02	-0.88	18.10	30
	6345	79	16.11	16.44	19.29	16.02	16.42	19.23	15.95	16.39	19.19	-3.76	-4.02	-0.88	18.41	30
UNII7	6665	143	16.07	15.83	18.96	16.03	15.82	18.93	16.05	15.69	18.89	-5.82	-5.08	-2.43	16.53	30

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.55	16.37	19.47	16.54	16.31	19.44	16.57	16.31	19.45	-3.76	-4.02	-0.88	18.59	30
	6185	47	16.13	15.92	19.04	16.24	15.89	19.08	16.36	16.06	19.23	-3.76	-4.02	-0.88	18.35	30
	6345	79	16.10	16.42	19.27	16.12	16.44	19.29	16.12	16.46	19.30	-3.76	-4.02	-0.88	18.42	30
UNII7	6665	143	16.11	15.75	18.94	16.12	15.67	18.91	16.12	15.62	18.89	-5.82	-5.08	-2.43	16.51	30

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	16.51	16.45	19.49	16.41	16.42	19.42	16.52	16.40	19.47	-3.76	-4.02	-0.88	18.61	30
	6185	47	16.19	16.06	19.13	16.24	16.05	19.15	16.29	16.12	19.22	-3.76	-4.02	-0.88	18.34	30
	6345	79	16.15	16.53	19.35	16.21	16.50	19.36	16.22	16.53	19.39	-3.76	-4.02	-0.88	18.51	30
UNII7	6665	143	16.18	15.76	18.98	16.15	15.78	18.98	16.09	15.71	18.91	-5.82	-5.08	-2.43	16.55	30

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	13.60	13.24	16.44	13.59	13.32	16.47	13.63	13.46	16.55	-3.76	-4.02	-0.88	15.67	30
	6265	63	13.60	13.44	16.53	13.42	13.40	16.42	13.31	13.32	16.32	-3.76	-4.02	-0.88	15.65	30
UNII5 106T+26T	6105	31	13.75	13.24	16.51	13.80	13.31	16.57	13.80	13.42	16.63	-3.76	-4.02	-0.88	15.75	30
	6265	63	13.73	13.38	16.57	13.66	13.41	16.55	13.48	13.32	16.41	-3.76	-4.02	-0.88	15.69	30
UNII5 484T+242T	6105	31	16.63	15.88	19.28	16.63	15.88	19.28	16.59	15.79	19.22	-3.76	-4.02	-0.88	18.40	30
	6265	63	16.40	16.16	19.29	16.44	16.15	19.31	16.48	16.16	19.33	-3.76	-4.02	-0.88	18.45	30

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	13.60	13.25	16.44	13.65	13.37	16.53	13.48	13.24	16.37	-3.76	-4.02	-0.88	15.65	30
	6265	63	13.22	13.10	16.17	13.21	13.19	16.21	12.95	13.03	16.00	-3.76	-4.02	-0.88	15.33	30
UNII5 106T+26T	6105	31	13.59	13.39	16.50	13.73	13.47	16.61	13.46	13.35	16.41	-3.76	-4.02	-0.88	15.73	30
	6265	63	13.23	13.20	16.23	13.30	13.29	16.30	12.98	13.13	16.07	-3.76	-4.02	-0.88	15.42	30
UNII5 484T+242T	6105	31	16.40	15.92	19.18	16.39	15.85	19.14	16.36	15.90	19.15	-3.76	-4.02	-0.88	18.30	30
	6265	63	15.86	16.02	18.95	15.87	16.01	18.95	15.91	16.04	18.99	-3.76	-4.02	-0.88	18.11	30

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	13.30	13.28	16.30	13.02	13.00	16.02	12.78	12.87	15.84	-3.76	-4.02	-0.88	15.42	30
	6265	63	12.78	13.03	15.92	12.50	12.72	15.62	12.41	12.72	15.58	-3.76	-4.02	-0.88	15.04	30
UNII5 106T+26T	6105	31	13.35	13.36	16.37	13.04	13.11	16.09	12.83	13.01	15.93	-3.76	-4.02	-0.88	15.49	30
	6265	63	12.92	13.13	16.04	12.57	12.80	15.69	12.53	12.82	15.69	-3.76	-4.02	-0.88	15.16	30
UNII5 484T+242T	6105	31	15.96	15.71	18.85	15.95	15.74	18.86	16.02	15.79	18.91	-3.76	-4.02	-0.88	18.03	30
	6265	63	15.56	15.77	18.68	15.56	15.80	18.69	15.53	15.78	18.67	-3.76	-4.02	-0.88	17.81	30

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	12.71	12.98	15.86	12.55	12.88	15.73	12.33	12.68	15.52	-3.76	-4.02	-0.88	14.98	30
	6265	63	12.50	12.81	15.67	12.44	12.61	15.54	12.57	12.64	15.62	-3.76	-4.02	-0.88	14.79	30
UNII5 106T+26T	6105	31	12.85	12.97	15.92	12.68	12.85	15.78	12.44	12.69	15.58	-3.76	-4.02	-0.88	15.04	30
	6265	63	12.58	12.79	15.69	12.53	12.61	15.58	12.65	12.61	15.64	-3.76	-4.02	-0.88	14.81	30
UNII5 484T+242T	6105	31	15.46	15.18	18.33	15.47	15.19	18.35	15.51	15.25	18.39	-3.76	-4.02	-0.88	17.51	30
	6265	63	15.53	15.39	18.47	15.49	15.37	18.44	15.37	15.37	18.38	-3.76	-4.02	-0.88	17.59	30

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	16.45	15.89	19.19	16.43	15.84	19.15	16.51	15.88	19.22	-3.76	-4.02	-0.88	18.34	30
	6265	63	16.03	15.97	19.01	16.09	16.02	19.07	16.23	16.05	19.15	-3.76	-4.02	-0.88	18.27	30
UNII5 160U	6105	31	15.60	15.34	18.48	15.71	15.45	18.59	15.89	15.51	18.72	-3.76	-4.02	-0.88	17.84	30
	6265	63	15.48	15.53	18.51	15.50	15.51	18.52	15.49	15.62	18.56	-3.76	-4.02	-0.88	17.68	30

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 3x996T	6105	31	16.14	15.81	18.99	16.19	15.86	19.04	16.41	15.98	19.21	-3.76	-4.02	-0.88	18.33	30
	6265	63	15.75	15.85	18.81	15.96	15.99	18.99	16.06	16.06	19.07	-3.76	-4.02	-0.88	18.19	30
UNII5 2x996T+484T	6105	31	16.39	16.05	19.23	16.46	16.12	19.30	16.30	16.03	19.17	-3.76	-4.02	-0.88	18.42	30
	6265	63	15.92	16.15	19.05	16.13	16.27	19.21	15.82	16.11	18.98	-3.76	-4.02	-0.88	18.33	30
UNII5 3x996T+484T	6105	31	16.15	15.83	19.01	16.13	15.88	19.02	16.30	15.91	19.12	-3.76	-4.02	-0.88	18.24	30
	6265	63	15.84	15.99	18.93	15.93	16.05	19.00	15.93	16.07	19.01	-3.76	-4.02	-0.88	18.13	30

10.3.3 E.I.R.P Output Power(Very Low Power Device)

Very Low Power Device Limit : 14 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-6.83	-4.71	-2.63	-7.23	-4.94	-2.93	-6.97	-4.52	-2.57	-3.76	-4.02	-0.88	-3.45	14
	6175	45	-7.54	-4.17	-2.52	-7.96	-4.51	-2.89	-7.66	-4.17	-2.57	-3.76	-4.02	-0.88	-3.40	14
	6415	93	-8.08	-5.19	-3.39	-8.37	-5.57	-3.74	-7.90	-5.24	-3.36	-3.76	-4.02	-0.88	-4.24	14
UNII7	6535	117	-7.95	-4.78	-3.07	-8.25	-5.18	-3.44	-7.83	-4.88	-3.10	-5.82	-5.08	-2.43	-5.50	14
	6695	149	-8.45	-5.19	-3.51	-8.80	-5.51	-3.85	-8.47	-5.13	-3.47	-5.82	-5.08	-2.43	-5.90	14
	6855	181	-8.28	-4.73	-3.14	-8.72	-5.06	-3.51	-8.47	-4.71	-3.18	-5.82	-5.08	-2.43	-5.57	14

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-3.85	-1.58	0.44	-4.07	-1.73	0.26	-3.97	-1.48	0.46	-3.76	-4.02	-0.88	-0.42	14
	6175	45	-4.47	-1.13	0.53	-4.71	-1.33	0.31	-4.61	-1.13	0.48	-3.76	-4.02	-0.88	-0.35	14
	6415	93	-5.35	-2.23	-0.51	-5.51	-2.47	-0.72	-5.21	-2.29	-0.50	-3.76	-4.02	-0.88	-1.38	14
UNII7	6535	117	-5.08	-1.80	-0.13	-5.27	-2.04	-0.35	-4.97	-1.88	-0.14	-5.82	-5.08	-2.43	-2.56	14
	6695	149	-5.49	-2.08	-0.45	-5.69	-2.27	-0.64	-5.49	-2.03	-0.41	-5.82	-5.08	-2.43	-2.84	14
	6855	181	-5.39	-1.74	-0.18	-5.64	-1.90	-0.37	-5.56	-1.71	-0.21	-5.82	-5.08	-2.43	-2.61	14

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	0.92	0.68	3.81	-	-	-	0.83	0.58	3.72	-3.76	-4.02	-0.88	2.93	14
	6175	45	1.11	1.03	4.08	-	-	-	1.05	0.95	4.01	-3.76	-4.02	-0.88	3.20	14
	6415	93	0.07	1.53	3.87	-	-	-	0.08	1.54	3.88	-3.76	-4.02	-0.88	3.00	14
UNII7	6535	117	0.55	1.27	3.93	-	-	-	0.50	1.27	3.91	-5.82	-5.08	-2.43	1.50	14
	6695	149	1.07	0.67	3.89	-	-	-	1.01	0.70	3.87	-5.82	-5.08	-2.43	1.46	14
	6855	181	1.65	1.74	4.70	-	-	-	1.51	1.84	4.69	-5.82	-5.08	-2.43	2.27	14

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	4.31	4.14	7.24	-	-	-	-3.76	-4.02	-0.88	6.36	14
	6175	45	-	-	-	4.82	4.68	7.76	-	-	-	-3.76	-4.02	-0.88	6.88	14
	6415	93	-	-	-	3.83	4.54	7.21	-	-	-	-3.76	-4.02	-0.88	6.33	14
UNII7	6535	117	-	-	-	5.78	6.39	9.11	-	-	-	-5.82	-5.08	-2.43	6.68	14
	6695	149	-	-	-	6.33	5.79	9.08	-	-	-	-5.82	-5.08	-2.43	6.65	14
	6855	181	-	-	-	6.24	5.49	8.89	-	-	-	-5.82	-5.08	-2.43	6.46	14

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	4.38	4.30	7.35	-	-	-	-3.76	-4.02	-0.88	6.47	14
	6175	45	-	-	-	4.53	4.30	7.43	-	-	-	-3.76	-4.02	-0.88	6.55	14
	6415	93	-	-	-	4.01	4.60	7.33	-	-	-	-3.76	-4.02	-0.88	6.45	14
UNII7	6535	117	-	-	-	5.40	6.03	8.73	-	-	-	-5.82	-5.08	-2.43	6.30	14
	6695	149	-	-	-	5.94	5.41	8.69	-	-	-	-5.82	-5.08	-2.43	6.26	14
	6855	181	-	-	-	6.32	5.58	8.97	-	-	-	-5.82	-5.08	-2.43	6.54	14

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-6.85	-4.45	-2.48	-7.14	-4.52	-2.62	-7.05	-4.20	-2.38	-3.76	-4.02	-0.88	-3.26	14
	6165	43	-7.15	-4.14	-2.38	-7.44	-4.23	-2.53	-7.50	-4.12	-2.48	-3.76	-4.02	-0.88	-3.26	14
	6405	91	-8.12	-5.04	-3.31	-8.11	-5.28	-3.46	-7.84	-5.19	-3.30	-3.76	-4.02	-0.88	-4.18	14
UNII7	6565	123	-7.70	-5.01	-3.14	-7.68	-5.31	-3.32	-7.45	-5.28	-3.22	-5.82	-5.08	-2.43	-5.57	14
	6685	147	-8.75	-5.63	-3.91	-8.89	-5.82	-4.08	-8.75	-5.64	-3.91	-5.82	-5.08	-2.43	-6.34	14
	6845	179	-7.88	-4.72	-3.01	-8.28	-4.88	-3.24	-8.33	-4.73	-3.15	-5.82	-5.08	-2.43	-5.44	14

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-3.87	-1.46	0.51	-4.22	-1.55	0.33	-4.12	-1.26	0.55	-3.76	-4.02	-0.88	-0.33	14
	6165	43	-4.13	-1.21	0.59	-4.48	-1.34	0.38	-4.48	-1.22	0.46	-3.76	-4.02	-0.88	-0.29	14
	6405	91	-5.40	-2.19	-0.49	-5.40	-2.44	-0.66	-5.13	-2.32	-0.49	-3.76	-4.02	-0.88	-1.37	14
UNII7	6565	123	-4.79	-2.09	-0.22	-4.80	-2.40	-0.43	-4.53	-2.33	-0.28	-5.82	-5.08	-2.43	-2.65	14
	6685	147	-5.72	-2.53	-0.82	-5.90	-2.87	-1.12	-5.76	-2.66	-0.93	-5.82	-5.08	-2.43	-3.25	14
	6845	179	-5.05	-1.63	0.00	-5.48	-1.84	-0.28	-5.51	-1.64	-0.15	-5.82	-5.08	-2.43	-2.43	14

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	1.38	0.90	4.16	1.15	0.67	3.93	1.30	0.83	4.08	-3.76	-4.02	-0.88	3.28	14
	6165	43	1.30	1.05	4.19	1.13	0.87	4.01	1.12	0.91	4.03	-3.76	-4.02	-0.88	3.31	14
	6405	91	0.23	1.06	3.67	0.12	0.92	3.55	0.30	1.12	3.74	-3.76	-4.02	-0.88	2.86	14
UNII7	6565	123	0.87	0.77	3.83	0.68	0.61	3.66	0.92	0.70	3.82	-5.82	-5.08	-2.43	1.40	14
	6685	147	0.87	0.59	3.74	0.71	0.43	3.58	0.81	0.58	3.71	-5.82	-5.08	-2.43	1.31	14
	6845	179	1.67	1.57	4.63	1.38	1.50	4.45	1.35	1.74	4.56	-5.82	-5.08	-2.43	2.20	14

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	3.95	3.98	6.97	-	-	-	3.93	3.95	6.95	-3.76	-4.02	-0.88	6.09	14
	6165	43	4.09	4.20	7.15	-	-	-	3.97	4.14	7.07	-3.76	-4.02	-0.88	6.27	14
	6405	91	3.90	4.40	7.17	-	-	-	3.95	4.45	7.22	-3.76	-4.02	-0.88	6.34	14
UNII7	6565	123	5.99	5.85	8.93	-	-	-	6.10	5.79	8.96	-5.82	-5.08	-2.43	6.53	14
	6685	147	6.05	5.66	8.87	-	-	-	6.03	5.67	8.86	-5.82	-5.08	-2.43	6.44	14
	6845	179	6.27	5.29	8.82	-	-	-	6.06	5.39	8.74	-5.82	-5.08	-2.43	6.39	14

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-	-	-	7.55	7.02	10.30	-	-	-	-3.76	-4.02	-0.88	9.42	14
	6165	43	-	-	-	7.35	7.31	10.34	-	-	-	-3.76	-4.02	-0.88	9.46	14
	6405	91	-	-	-	6.57	7.41	10.02	-	-	-	-3.76	-4.02	-0.88	9.14	14
UNII7	6565	123	-	-	-	8.15	7.81	10.99	-	-	-	-5.82	-5.08	-2.43	8.56	14
	6685	147	-	-	-	8.21	7.98	11.11	-	-	-	-5.82	-5.08	-2.43	8.68	14
	6845	179	-	-	-	8.64	8.58	11.62	-	-	-	-5.82	-5.08	-2.43	9.19	14

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	-	-	-	7.27	6.70	10.01	-	-	-	-3.76	-4.02	-0.88	9.13	14
	6165	43	-	-	-	7.64	7.50	10.58	-	-	-	-3.76	-4.02	-0.88	9.70	14
	6405	91	-	-	-	6.89	7.44	10.18	-	-	-	-3.76	-4.02	-0.88	9.30	14
UNII7	6565	123	-	-	-	7.86	7.48	10.68	-	-	-	-5.82	-5.08	-2.43	8.25	14
	6685	147	-	-	-	7.91	7.66	10.80	-	-	-	-5.82	-5.08	-2.43	8.37	14
	6845	179	-	-	-	8.32	8.26	11.30	-	-	-	-5.82	-5.08	-2.43	8.87	14

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-7.21	-4.88	-2.88	-7.48	-4.68	-2.85	-7.61	-4.35	-2.67	-3.76	-4.02	-0.88	-3.55	14
	6145	39	-7.43	-4.69	-2.84	-7.77	-4.56	-2.87	-8.08	-4.57	-2.97	-3.76	-4.02	-0.88	-3.72	14
	6385	87	-8.75	-5.10	-3.54	-8.52	-5.53	-3.76	-8.22	-5.63	-3.72	-3.76	-4.02	-0.88	-4.42	14
UNII7	6625	135	-7.77	-4.41	-2.77	-7.65	-4.25	-2.62	-7.45	-4.15	-2.48	-5.82	-5.08	-2.43	-4.91	14
	6705	151	-9.15	-6.05	-4.32	-9.22	-6.10	-4.37	-9.40	-5.91	-4.31	-5.82	-5.08	-2.43	-6.74	14
	6785	167	-8.58	-5.05	-3.46	-8.78	-5.08	-3.54	-9.04	-4.96	-3.53	-5.82	-5.08	-2.43	-5.89	14

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-4.10	-1.66	0.30	-4.44	-1.49	0.29	-4.54	-1.18	0.46	-3.76	-4.02	-0.88	-0.42	14
	6145	39	-4.34	-1.62	0.24	-4.66	-1.50	0.21	-5.00	-1.47	0.12	-3.76	-4.02	-0.88	-0.64	14
	6385	87	-5.90	-2.01	-0.52	-5.67	-2.46	-0.77	-5.35	-2.55	-0.72	-3.76	-4.02	-0.88	-1.40	14
UNII7	6625	135	-4.85	-1.25	0.32	-4.72	-1.12	0.45	-4.51	-1.01	0.59	-5.82	-5.08	-2.43	-1.84	14
	6705	151	-6.00	-2.89	-1.16	-6.11	-2.92	-1.22	-6.24	-2.74	-1.14	-5.82	-5.08	-2.43	-3.57	14
	6785	167	-5.54	-1.99	-0.40	-5.73	-2.03	-0.48	-5.97	-1.94	-0.49	-5.82	-5.08	-2.43	-2.83	14

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	1.25	0.65	3.97	1.18	0.62	3.92	1.15	0.61	3.90	-3.76	-4.02	-0.88	3.09	14
	6145	39	1.11	0.54	3.84	0.96	0.50	3.75	0.75	0.33	3.55	-3.76	-4.02	-0.88	2.96	14
	6385	87	0.54	1.35	3.97	0.63	1.19	3.93	0.68	1.26	3.99	-3.76	-4.02	-0.88	3.11	14
UNII7	6625	135	0.95	0.66	3.81	0.99	0.86	3.94	1.07	1.00	4.04	-5.82	-5.08	-2.43	1.61	14
	6705	151	0.93	0.39	3.68	0.84	0.38	3.63	0.67	0.56	3.63	-5.82	-5.08	-2.43	1.25	14
	6785	167	1.06	0.31	3.71	0.95	0.38	3.69	0.76	0.54	3.66	-5.82	-5.08	-2.43	1.28	14

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	3.99	3.92	6.97	3.96	3.89	6.94	3.99	3.92	6.97	-3.76	-4.02	-0.88	6.09	14
	6145	39	3.96	4.09	7.04	3.87	4.07	6.98	3.65	3.98	6.83	-3.76	-4.02	-0.88	6.16	14
	6385	87	3.82	4.49	7.18	3.84	4.39	7.13	3.97	4.41	7.21	-3.76	-4.02	-0.88	6.33	14
UNII7	6625	135	5.72	5.04	8.40	5.77	5.18	8.50	5.86	5.36	8.63	-5.82	-5.08	-2.43	6.20	14
	6705	151	6.29	5.64	8.99	6.27	5.62	8.97	6.08	5.80	8.95	-5.82	-5.08	-2.43	6.56	14
	6785	167	5.83	5.04	8.47	5.81	5.08	8.47	5.58	5.19	8.40	-5.82	-5.08	-2.43	6.04	14

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	7.61	6.95	10.31	-	-	-	7.61	6.95	10.30	-3.76	-4.02	-0.88	9.43	14
	6145	39	6.93	6.93	9.94	-	-	-	6.78	6.91	9.86	-3.76	-4.02	-0.88	9.06	14
	6385	87	6.48	7.25	9.89	-	-	-	6.62	7.21	9.93	-3.76	-4.02	-0.88	9.05	14
UNII7	6625	135	8.33	7.88	11.12	-	-	-	8.43	8.10	11.28	-5.82	-5.08	-2.43	8.85	14
	6705	151	8.25	7.83	11.06	-	-	-	8.13	7.96	11.06	-5.82	-5.08	-2.43	8.63	14
	6785	167	8.37	7.74	11.08	-	-	-	8.20	7.84	11.04	-5.82	-5.08	-2.43	8.65	14

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	10.39	10.02	13.22	-	-	-	-3.76	-4.02	-0.88	12.34	14
	6145	39	-	-	-	9.65	9.71	12.69	-	-	-	-3.76	-4.02	-0.88	11.81	14
	6385	87	-	-	-	9.25	10.29	12.81	-	-	-	-3.76	-4.02	-0.88	11.93	14
UNII7	6625	135	-	-	-	11.37	10.97	14.19	-	-	-	-5.82	-5.08	-2.43	11.76	14
	6705	151	-	-	-	11.19	10.78	14.00	-	-	-	-5.82	-5.08	-2.43	11.57	14
	6785	167	-	-	-	11.22	10.68	13.97	-	-	-	-5.82	-5.08	-2.43	11.54	14

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	10.42	9.80	13.13	-	-	-	-3.76	-4.02	-0.88	12.25	14
	6145	39	-	-	-	10.25	10.00	13.14	-	-	-	-3.76	-4.02	-0.88	12.26	14
	6385	87	-	-	-	9.81	10.34	13.09	-	-	-	-3.76	-4.02	-0.88	12.21	14
UNII7	6625	135	-	-	-	11.15	10.74	13.96	-	-	-	-5.82	-5.08	-2.43	11.53	14
	6705	151	-	-	-	10.96	10.55	13.77	-	-	-	-5.82	-5.08	-2.43	11.34	14
	6785	167	-	-	-	10.96	10.44	13.72	-	-	-	-5.82	-5.08	-2.43	11.29	14

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-7.29	-5.65	-3.38	-7.14	-4.98	-2.92	-7.19	-4.69	-2.76	-3.76	-4.02	-0.88	-3.64	14
	6185	47	-7.73	-5.37	-3.38	-7.65	-4.80	-2.98	-7.90	-4.75	-3.04	-3.76	-4.02	-0.88	-3.86	14
	6345	79	-8.60	-5.48	-3.76	-8.37	-5.31	-3.56	-8.38	-5.36	-3.60	-3.76	-4.02	-0.88	-4.44	14
UNII7	6665	143	-8.12	-4.83	-3.16	-7.58	-4.24	-2.59	-7.40	-4.18	-2.49	-5.82	-5.08	-2.43	-4.92	14

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.31	-2.74	-0.45	-4.15	-2.07	0.02	-4.16	-1.76	0.21	-3.76	-4.02	-0.88	-0.67	14
	6185	47	-4.62	-2.21	-0.24	-4.56	-1.66	0.14	-4.88	-1.62	0.06	-3.76	-4.02	-0.88	-0.74	14
	6345	79	-5.76	-2.65	-0.92	-5.56	-2.50	-0.76	-5.55	-2.57	-0.80	-3.76	-4.02	-0.88	-1.64	14
UNII7	6665	143	-5.27	-1.78	-0.17	-4.79	-1.22	0.36	-4.58	-1.10	0.51	-5.82	-5.08	-2.43	-1.92	14

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.08	0.40	3.77	1.13	0.51	3.84	1.13	0.52	3.85	-3.76	-4.02	-0.88	2.97	14
	6185	47	1.27	0.71	4.01	1.23	0.77	4.01	1.07	0.66	3.88	-3.76	-4.02	-0.88	3.13	14
	6345	79	0.89	1.32	4.12	0.83	1.27	4.07	0.79	1.29	4.06	-3.76	-4.02	-0.88	3.24	14
UNII7	6665	143	0.56	-0.09	3.26	0.73	0.25	3.51	0.71	0.35	3.54	-5.82	-5.08	-2.43	1.11	14

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	3.76	4.02	6.90	3.82	4.07	6.96	3.87	4.15	7.02	-3.76	-4.02	-0.88	6.14	14
	6185	47	3.88	4.08	6.99	3.81	4.07	6.95	3.68	4.05	6.88	-3.76	-4.02	-0.88	6.11	14
	6345	79	4.55	4.82	7.70	4.50	4.74	7.63	4.46	4.80	7.65	-3.76	-4.02	-0.88	6.82	14
UNII7	6665	143	5.93	4.99	8.50	5.99	5.13	8.59	6.13	5.36	8.77	-5.82	-5.08	-2.43	6.34	14

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	6.78	6.47	9.64	-	-	-	6.84	6.57	9.72	-3.76	-4.02	-0.88	8.84	14
	6185	47	6.74	6.92	9.84	-	-	-	6.64	6.91	9.79	-3.76	-4.02	-0.88	8.96	14
	6345	79	7.43	7.74	10.60	-	-	-	7.35	7.72	10.54	-3.76	-4.02	-0.88	9.72	14
UNII7	6665	143	8.04	7.27	10.69	-	-	-	8.18	7.53	10.88	-5.82	-5.08	-2.43	8.45	14

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.37	10.37	13.38	-	-	-	-3.76	-4.02	-0.88	12.50	14
	6185	47	-	-	-	10.38	10.38	13.39	-	-	-	-3.76	-4.02	-0.88	12.51	14
	6345	79	-	-	-	10.61	10.97	13.80	-	-	-	-3.76	-4.02	-0.88	12.92	14
UNII7	6665	143	-	-	-	11.04	10.34	13.71	-	-	-	-5.82	-5.08	-2.43	11.28	14

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-7.24	-4.62	-2.73	-7.45	-4.41	-2.66	-7.97	-4.50	-2.89	-3.76	-4.02	-0.88	-3.54	14
	6185	47	-8.02	-4.71	-3.05	-8.30	-4.89	-3.26	-8.89	-5.46	-3.84	-3.76	-4.02	-0.88	-3.93	14
	6345	79	-8.48	-5.41	-3.67	-8.14	-5.81	-3.81	-8.13	-6.26	-4.09	-3.76	-4.02	-0.88	-4.55	14
UNII7	6665	143	-7.49	-4.15	-2.50	-7.49	-4.17	-2.51	-7.99	-4.29	-2.75	-5.82	-5.08	-2.43	-4.93	14

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.27	-1.65	0.25	-4.43	-1.41	0.35	-4.91	-1.49	0.14	-3.76	-4.02	-0.88	-0.53	14
	6185	47	-5.05	-1.70	-0.05	-5.41	-1.86	-0.27	-5.93	-2.38	-0.79	-3.76	-4.02	-0.88	-0.93	14
	6345	79	-5.64	-2.57	-0.83	-5.34	-3.03	-1.03	-5.32	-3.41	-1.25	-3.76	-4.02	-0.88	-1.71	14
UNII7	6665	143	-4.64	-1.17	0.44	-4.69	-1.16	0.43	-5.11	-1.26	0.24	-5.82	-5.08	-2.43	-1.99	14

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.08	0.54	3.83	1.01	0.51	3.78	0.84	0.33	3.60	-3.76	-4.02	-0.88	2.95	14
	6185	47	1.36	1.20	4.29	1.17	1.12	4.16	0.92	0.89	3.92	-3.76	-4.02	-0.88	3.41	14
	6345	79	0.71	1.22	3.98	0.85	1.11	3.99	0.82	1.09	3.97	-3.76	-4.02	-0.88	3.11	14
UNII7	6665	143	0.84	0.37	3.62	0.81	0.43	3.63	0.55	0.55	3.56	-5.82	-5.08	-2.43	1.20	14

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	3.83	4.14	7.00	3.77	4.11	6.95	3.60	4.03	6.83	-3.76	-4.02	-0.88	6.12	14
	6185	47	3.52	3.97	6.76	3.43	3.93	6.70	3.22	3.82	6.54	-3.76	-4.02	-0.88	5.88	14
	6345	79	4.42	4.77	7.61	4.45	4.67	7.57	4.57	4.71	7.65	-3.76	-4.02	-0.88	6.77	14
UNII7	6665	143	6.20	5.39	8.83	6.18	5.39	8.81	6.03	5.58	8.82	-5.82	-5.08	-2.43	6.40	14

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	7.23	7.08	10.17	-	-	-	7.09	7.02	10.06	-3.76	-4.02	-0.88	9.29	14
	6185	47	7.28	7.21	10.26	-	-	-	7.03	7.07	10.06	-3.76	-4.02	-0.88	9.38	14
	6345	79	7.23	7.56	10.41	-	-	-	7.34	7.54	10.45	-3.76	-4.02	-0.88	9.57	14
UNII7	6665	143	8.26	7.59	10.95	-	-	-	8.14	7.72	10.94	-5.82	-5.08	-2.43	8.52	14

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.26	10.35	13.32	-	-	-	-3.76	-4.02	-0.88	12.44	14
	6185	47	-	-	-	9.96	10.18	13.08	-	-	-	-3.76	-4.02	-0.88	12.20	14
	6345	79	-	-	-	10.59	10.81	13.71	-	-	-	-3.76	-4.02	-0.88	12.83	14
UNII7	6665	143	-	-	-	11.13	10.60	13.88	-	-	-	-5.82	-5.08	-2.43	11.45	14

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.81	10.77	13.80	-	-	-	-3.76	-4.02	-0.88	12.92	14
	6185	47	-	-	-	11.11	11.11	14.12	-	-	-	-3.76	-4.02	-0.88	13.24	14
	6345	79	-	-	-	10.49	10.94	13.73	-	-	-	-3.76	-4.02	-0.88	12.85	14
UNII7	6665	143	-	-	-	10.50	9.91	13.23	-	-	-	-5.82	-5.08	-2.43	10.80	14

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-	-	-	11.42	11.39	14.41	-	-	-	-3.76	-4.02	-0.88	13.53	14
	6185	47	-	-	-	11.72	11.71	14.73	-	-	-	-3.76	-4.02	-0.88	13.85	14
	6345	79	-	-	-	11.08	11.52	14.32	-	-	-	-3.76	-4.02	-0.88	13.44	14
UNII7	6665	143	-	-	-	11.09	10.50	13.81	-	-	-	-5.82	-5.08	-2.43	11.38	14

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-6.77	-6.00	-3.36	-6.52	-5.22	-2.81	-6.44	-4.77	-2.51	-3.76	-4.02	-0.88	-3.39	14
	6265	63	-7.03	-5.60	-3.25	-6.82	-4.98	-2.80	-7.02	-4.74	-2.72	-3.76	-4.02	-0.88	-3.60	14
UNII5 52T	6105	31	-3.95	-2.88	-0.37	-3.65	-2.28	0.10	-3.56	-1.78	0.43	-3.76	-4.02	-0.88	-0.45	14
	6265	63	-3.85	-2.62	-0.18	-3.84	-1.93	0.23	-4.01	-1.66	0.33	-3.76	-4.02	-0.88	-0.55	14
UNII5 106T	6105	31	0.97	0.46	3.74	1.05	0.55	3.82	1.12	0.65	3.90	-3.76	-4.02	-0.88	3.02	14
	6265	63	1.14	1.18	4.17	1.02	1.18	4.11	0.92	1.12	4.03	-3.76	-4.02	-0.88	3.29	14
UNII5 242T	6105	31	3.91	3.98	6.95	3.94	4.02	6.99	3.99	4.07	7.04	-3.76	-4.02	-0.88	6.16	14
	6265	63	3.61	3.62	6.63	3.51	3.58	6.56	3.35	3.55	6.46	-3.76	-4.02	-0.88	5.75	14
UNII5 484T	6105	31	6.87	6.26	9.59	-	-	-	6.91	6.30	9.62	-3.76	-4.02	-0.88	8.74	14
	6265	63	7.01	6.48	9.76	-	-	-	6.82	6.44	9.65	-3.76	-4.02	-0.88	8.88	14
UNII5 996T	6105	31	-	-	-	10.65	10.26	13.47	-	-	-	-3.76	-4.02	-0.88	12.59	14
	6265	63	-	-	-	10.48	10.55	13.53	-	-	-	-3.76	-4.02	-0.88	12.65	14

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-8.21	-6.55	-4.29	-7.59	-5.36	-3.33	-7.21	-4.59	-2.69	-3.76	-4.02	-0.88	-3.57	14
	6265	63	-8.76	-6.28	-4.34	-8.24	-5.43	-3.60	-7.98	-4.85	-3.13	-3.76	-4.02	-0.88	-4.01	14
UNII5 52T	6105	31	-5.25	-3.67	-1.38	-4.64	-2.52	-0.44	-4.30	-1.71	0.20	-3.76	-4.02	-0.88	-0.68	14
	6265	63	-5.91	-3.61	-1.60	-5.39	-2.64	-0.79	-5.11	-2.02	-0.28	-3.76	-4.02	-0.88	-1.16	14
UNII5 106T	6105	31	0.92	0.46	3.71	0.81	0.39	3.62	0.85	0.49	3.68	-3.76	-4.02	-0.88	2.83	14
	6265	63	0.65	0.88	3.78	0.45	0.81	3.65	0.45	0.85	3.66	-3.76	-4.02	-0.88	2.90	14
UNII5 242T	6105	31	4.58	4.51	7.56	4.48	4.47	7.49	4.33	4.38	7.36	-3.76	-4.02	-0.88	6.68	14
	6265	63	4.65	4.36	7.52	4.56	4.31	7.45	4.33	4.20	7.28	-3.76	-4.02	-0.88	6.64	14
UNII5 484T	6105	31	7.47	6.72	10.12	-	-	-	7.32	6.66	10.01	-3.76	-4.02	-0.88	9.24	14
	6265	63	7.71	7.59	10.66	-	-	-	7.47	7.48	10.48	-3.76	-4.02	-0.88	9.78	14
UNII5 996T	6105	31	-	-	-	10.52	10.24	13.39	-	-	-	-3.76	-4.02	-0.88	12.51	14
	6265	63	-	-	-	10.50	10.72	13.63	-	-	-	-3.76	-4.02	-0.88	12.75	14

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	-7.21	-4.58	-2.69	-8.31	-5.28	-3.53	-9.43	-6.05	-4.41	-3.76	-4.02	-0.88	-3.57	14
	6265	63	-7.88	-4.87	-3.11	-8.83	-5.77	-4.02	-9.59	-6.72	-4.91	-3.76	-4.02	-0.88	-3.99	14
UNII5 52T	6105	31	-4.38	-1.66	0.20	-5.37	-2.31	-0.56	-6.48	-3.16	-1.50	-3.76	-4.02	-0.88	-0.68	14
	6265	63	-5.10	-2.04	-0.29	-5.96	-3.07	-1.27	-6.71	-3.94	-2.10	-3.76	-4.02	-0.88	-1.17	14
UNII5 106T	6105	31	1.38	0.93	4.17	1.24	0.89	4.07	0.77	0.52	3.66	-3.76	-4.02	-0.88	3.29	14
	6265	63	0.80	1.41	4.13	0.72	1.27	4.02	0.43	1.06	3.77	-3.76	-4.02	-0.88	3.25	14
UNII5 242T	6105	31	4.18	4.33	7.27	4.07	4.29	7.19	3.91	4.23	7.08	-3.76	-4.02	-0.88	6.39	14
	6265	63	4.21	4.15	7.19	4.10	4.06	7.09	4.07	4.07	7.08	-3.76	-4.02	-0.88	6.31	14
UNII5 484T	6105	31	7.66	7.60	10.64	-	-	-	7.50	7.53	10.52	-3.76	-4.02	-0.88	9.76	14
	6265	63	7.37	7.36	10.37	-	-	-	7.24	7.31	10.29	-3.76	-4.02	-0.88	9.49	14
UNII5 996T	6105	31	-	-	-	10.56	10.53	13.56	-	-	-	-3.76	-4.02	-0.88	12.68	14
	6265	63	-	-	-	10.10	10.45	13.29	-	-	-	-3.76	-4.02	-0.88	12.41	14

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	-7.59	-4.23	-2.58	-8.08	-4.63	-3.01	-8.67	-5.14	-3.54	-3.76	-4.02	-0.88	-3.46	14
	6265	63	-7.84	-5.00	-3.18	-7.74	-5.58	-3.52	-7.77	-6.03	-3.80	-3.76	-4.02	-0.88	-4.06	14
UNII5 52T	6105	31	-4.79	-1.17	0.40	-5.29	-1.51	0.01	-5.86	-2.07	-0.55	-3.76	-4.02	-0.88	-0.48	14
	6265	63	-4.92	-1.88	-0.13	-4.71	-2.45	-0.43	-4.66	-2.82	-0.63	-3.76	-4.02	-0.88	-1.01	14
UNII5 106T	6105	31	0.75	0.62	3.70	0.51	0.51	3.52	0.27	0.33	3.31	-3.76	-4.02	-0.88	2.82	14
	6265	63	0.47	1.13	3.82	0.56	0.99	3.79	0.56	0.96	3.77	-3.76	-4.02	-0.88	2.94	14
UNII5 242T	6105	31	3.77	4.16	6.98	3.65	4.13	6.91	3.46	4.02	6.76	-3.76	-4.02	-0.88	6.10	14
	6265	63	4.03	3.97	7.01	4.04	3.91	6.98	4.13	3.90	7.03	-3.76	-4.02	-0.88	6.15	14
UNII5 484T	6105	31	7.77	7.86	10.82	-	-	-	7.56	7.73	10.66	-3.76	-4.02	-0.88	9.94	14
	6265	63	7.58	7.57	10.58	-	-	-	7.71	7.54	10.64	-3.76	-4.02	-0.88	9.76	14
UNII5 996T	6105	31	-	-	-	10.59	10.97	13.79	-	-	-	-3.76	-4.02	-0.88	12.91	14
	6265	63	-	-	-	10.60	10.82	13.73	-	-	-	-3.76	-4.02	-0.88	12.85	14

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	-	-	-	11.47	11.36	14.43	-	-	-	-3.76	-4.02	-0.88	13.55	14
	6265	63	-	-	-	11.22	11.34	14.29	-	-	-	-3.76	-4.02	-0.88	13.41	14
UNII5 160U	6105	31	-	-	-	11.37	11.25	14.32	-	-	-	-3.76	-4.02	-0.88	13.44	14
	6265	63	-	-	-	11.04	11.25	14.16	-	-	-	-3.76	-4.02	-0.88	13.28	14

Mode : EHT320

MODE : FHN520

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 4x996T	6105	31	-	-	-	11.82	11.46	14.65	-	-	-	-3.76	-4.02	-0.88	13.77	14
	6265	63	-	-	-	11.45	11.51	14.49	-	-	-	-3.76	-4.02	-0.88	13.61	14
UNII5 SU	6105	31	-	-	-	11.63	11.64	14.65	-	-	-	-3.76	-4.02	-0.88	13.77	14
	6265	63	-	-	-	11.37	11.58	14.49	-	-	-	-3.76	-4.02	-0.88	13.61	14

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	3.96	3.76	6.87	-	-	-	-3.76	-4.02	-0.88	5.99	14
	6175	45	-	-	-	3.58	3.72	6.66	-	-	-	-3.76	-4.02	-0.88	5.78	14
	6415	93	-	-	-	3.36	4.10	6.76	-	-	-	-3.76	-4.02	-0.88	5.88	14
UNII7	6535	117	-	-	-	4.87	5.08	7.99	-	-	-	-5.82	-5.08	-2.43	5.56	14
	6695	149	-	-	-	5.38	4.88	8.15	-	-	-	-5.82	-5.08	-2.43	5.72	14
	6855	181	-	-	-	5.89	5.07	8.51	-	-	-	-5.82	-5.08	-2.43	6.08	14

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-3.86	-1.52	0.48	-4.00	-1.60	0.38	-3.91	-1.44	0.51	-3.76	-4.02	-0.88	-0.37	14
	6175	45	-4.40	-1.26	0.46	-4.58	-1.35	0.34	-4.55	-1.24	0.42	-3.76	-4.02	-0.88	-0.42	14
	6415	93	-5.28	-2.29	-0.52	-5.39	-2.40	-0.63	-5.24	-2.31	-0.52	-3.76	-4.02	-0.88	-1.40	14
UNII7	6535	117	-5.04	-1.84	-0.14	-5.14	-1.97	-0.26	-4.96	-1.88	-0.14	-5.82	-5.08	-2.43	-2.57	14
	6695	149	-5.53	-2.10	-0.47	-5.64	-2.20	-0.58	-5.52	-2.06	-0.44	-5.82	-5.08	-2.43	-2.87	14
	6855	181	-5.54	-1.75	-0.24	-5.67	-1.86	-0.35	-5.63	-1.76	-0.27	-5.82	-5.08	-2.43	-2.67	14

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	0.85	0.57	3.72	-	-	-	0.80	0.51	3.66	-3.76	-4.02	-0.88	2.84	14
	6175	45	1.09	0.90	4.01	-	-	-	1.04	0.83	3.95	-3.76	-4.02	-0.88	3.13	14
	6415	93	0.06	1.43	3.81	-	-	-	0.07	1.49	3.85	-3.76	-4.02	-0.88	2.97	14
UNII7	6535	117	0.51	1.20	3.88	-	-	-	0.47	1.21	3.86	-5.82	-5.08	-2.43	1.45	14
	6695	149	1.01	0.57	3.81	-	-	-	0.98	0.60	3.81	-5.82	-5.08	-2.43	1.38	14
	6855	181	1.60	1.67	4.65	-	-	-	1.50	1.75	4.64	-5.82	-5.08	-2.43	2.22	14

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-3.75	-1.17	0.74	-4.01	-1.37	0.52	-3.98	-1.10	0.70	-3.76	-4.02	-0.88	-0.14	14
	6165	43	-3.99	-1.01	0.76	-4.17	-1.07	0.66	-4.26	-1.01	0.67	-3.76	-4.02	-0.88	-0.12	14
	6405	91	-5.19	-2.03	-0.32	-5.25	-2.20	-0.45	-4.96	-2.12	-0.31	-3.76	-4.02	-0.88	-1.19	14
UNII7	6565	123	-4.63	-1.85	-0.01	-4.71	-2.05	-0.17	-4.44	-2.05	-0.07	-5.82	-5.08	-2.43	-2.44	14
	6685	147	-5.64	-2.37	-0.69	-5.79	-2.50	-0.83	-5.67	-2.37	-0.71	-5.82	-5.08	-2.43	-3.12	14
	6845	179	-5.05	-1.49	0.09	-5.30	-1.64	-0.09	-5.40	-1.53	-0.04	-5.82	-5.08	-2.43	-2.34	14

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	1.26	0.82	4.06	1.11	0.65	3.90	1.23	0.77	4.01	-3.76	-4.02	-0.88	3.18	14
	6165	43	1.20	0.95	4.09	1.07	0.82	3.96	1.03	0.84	3.95	-3.76	-4.02	-0.88	3.21	14
	6405	91	0.22	0.95	3.61	0.14	0.90	3.55	0.28	1.03	3.68	-3.76	-4.02	-0.88	2.80	14
UNII7	6565	123	0.87	0.81	3.85	0.73	0.69	3.72	0.94	0.75	3.85	-5.82	-5.08	-2.43	1.42	14
	6685	147	0.89	0.61	3.76	0.75	0.49	3.63	0.83	0.62	3.73	-5.82	-5.08	-2.43	1.33	14
	6845	179	1.67	1.59	4.64	1.44	1.55	4.51	1.36	1.77	4.58	-5.82	-5.08	-2.43	2.21	14

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-4.04	-1.56	0.38	-4.30	-1.56	0.29	-4.48	-1.18	0.48	-3.76	-4.02	-0.88	-0.40	14
	6145	39	-4.32	-1.61	0.25	-4.58	-1.57	0.19	-4.90	-1.49	0.14	-3.76	-4.02	-0.88	-0.63	14
	6385	87	-5.78	-2.05	-0.52	-5.69	-2.43	-0.75	-5.29	-2.52	-0.68	-3.76	-4.02	-0.88	-1.40	14
UNII7	6625	135	-5.37	-1.74	-0.18	-5.34	-1.67	-0.12	-5.09	-1.51	0.07	-5.82	-5.08	-2.43	-2.36	14
	6705	151	-6.02	-2.74	-1.07	-6.11	-2.82	-1.15	-6.26	-2.62	-1.06	-5.82	-5.08	-2.43	-3.49	14
	6785	167	-5.56	-1.87	-0.33	-5.72	-1.91	-0.40	-5.94	-1.82	-0.40	-5.82	-5.08	-2.43	-2.76	14

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	1.17	0.69	3.94	1.11	0.61	3.88	1.12	0.62	3.88	-3.76	-4.02	-0.88	3.06	14
	6145	39	1.05	0.56	3.82	0.96	0.48	3.73	0.73	0.36	3.56	-3.76	-4.02	-0.88	2.94	14
	6385	87	0.55	1.37	3.99	0.56	1.21	3.91	0.69	1.26	3.99	-3.76	-4.02	-0.88	3.11	14
UNII7	6625	135	0.93	0.61	3.78	0.92	0.77	3.86	1.04	0.95	4.01	-5.82	-5.08	-2.43	1.58	14
	6705	151	0.90	0.33	3.63	0.82	0.32	3.59	0.66	0.52	3.60	-5.82	-5.08	-2.43	1.20	14
	6785	167	1.05	0.27	3.69	0.96	0.36	3.68	0.76	0.48	3.63	-5.82	-5.08	-2.43	1.26	14

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	7.25	6.63	9.96	7.24	6.63	9.95	7.25	6.62	9.96	-3.76	-4.02	-0.88	9.08	14
	6145	39	6.74	6.81	9.79	6.76	6.84	9.81	6.82	6.89	9.86	-3.76	-4.02	-0.88	8.98	14
	6385	87	6.59	7.23	9.93	6.59	7.28	9.96	6.54	7.27	9.93	-3.76	-4.02	-0.88	9.08	14
UNII7	6625	135	8.35	8.05	11.22	8.35	8.02	11.20	8.30	7.96	11.15	-5.82	-5.08	-2.43	8.79	14
	6705	151	8.11	7.92	11.03	8.13	7.93	11.04	8.20	7.89	11.06	-5.82	-5.08	-2.43	8.63	14
	6785	167	8.20	7.84	11.04	8.23	7.81	11.03	8.29	7.78	11.05	-5.82	-5.08	-2.43	8.62	14

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.19	-2.38	-0.18	-4.03	-2.05	0.08	-4.07	-1.61	0.34	-3.76	-4.02	-0.88	-0.54	14
	6185	47	-4.51	-2.05	-0.10	-4.46	-1.70	0.14	-4.76	-1.64	0.09	-3.76	-4.02	-0.88	-0.74	14
	6345	79	-5.54	-2.48	-0.74	-5.45	-2.44	-0.68	-5.37	-2.40	-0.62	-3.76	-4.02	-0.88	-1.50	14
UNII7	6665	143	-5.12	-1.64	-0.03	-4.76	-1.23	0.36	-4.55	-1.04	0.56	-5.82	-5.08	-2.43	-1.87	14

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	0.87	0.37	3.63	0.98	0.43	3.72	0.91	0.39	3.66	-3.76	-4.02	-0.88	2.84	14
	6185	47	1.05	0.54	3.81	1.07	0.70	3.90	0.86	0.59	3.73	-3.76	-4.02	-0.88	3.02	14
	6345	79	0.77	1.25	4.03	0.73	1.21	3.99	0.69	1.24	3.98	-3.76	-4.02	-0.88	3.15	14
UNII7	6665	143	0.39	-0.12	3.15	0.51	0.16	3.35	0.63	0.35	3.50	-5.82	-5.08	-2.43	1.07	14

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	7.00	6.78	9.90	6.93	6.77	9.86	6.90	6.75	9.84	-3.76	-4.02	-0.88	9.02	14
	6185	47	6.84	7.26	10.07	6.86	7.24	10.06	6.91	7.25	10.10	-3.76	-4.02	-0.88	9.22	14
	6345	79	6.90	6.92	9.92	6.92	6.93	9.93	6.94	6.94	9.95	-3.76	-4.02	-0.88	9.07	14
UNII7	6665	143	8.13	7.55	10.86	8.12	7.50	10.83	8.04	7.40	10.74	-5.82	-5.08	-2.43	8.43	14

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.10	-1.49	0.41	-4.29	-1.29	0.48	-4.75	-1.34	0.29	-3.76	-4.02	-0.88	-0.40	14
	6185	47	-4.87	-1.58	0.09	-5.10	-1.68	-0.05	-5.67	-2.20	-0.59	-3.76	-4.02	-0.88	-0.79	14
	6345	79	-5.37	-2.52	-0.70	-5.20	-2.84	-0.85	-5.07	-3.22	-1.04	-3.76	-4.02	-0.88	-1.58	14
UNII7	6665	143	-5.04	-1.60	0.02	-5.09	-1.53	0.05	-5.51	-1.62	-0.14	-5.82	-5.08	-2.43	-2.38	14

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	0.97	0.46	3.73	0.89	0.40	3.66	0.72	0.30	3.53	-3.76	-4.02	-0.88	2.85	14
	6185	47	1.23	1.09	4.17	1.09	1.02	4.07	0.80	0.86	3.84	-3.76	-4.02	-0.88	3.29	14
	6345	79	0.62	1.15	3.91	0.67	1.01	3.85	0.76	1.02	3.90	-3.76	-4.02	-0.88	3.03	14
UNII7	6665	143	0.72	0.31	3.53	0.63	0.33	3.49	0.45	0.49	3.48	-5.82	-5.08	-2.43	1.10	14

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	6.88	6.66	9.78	6.89	6.65	9.78	6.93	6.68	9.81	-3.76	-4.02	-0.88	8.93	14
	6185	47	6.46	6.85	9.67	6.46	6.87	9.68	6.55	6.93	9.75	-3.76	-4.02	-0.88	8.87	14
	6345	79	6.90	6.77	9.85	6.90	6.78	9.85	6.86	6.76	9.82	-3.76	-4.02	-0.88	8.97	14
UNII7	6665	143	8.16	7.67	10.93	8.18	7.67	10.94	8.21	7.59	10.93	-5.82	-5.08	-2.43	8.51	14

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	10.54	10.44	13.50	10.53	10.38	13.47	10.58	10.40	13.51	-3.76	-4.02	-0.88	12.63	14
	6185	47	10.37	10.33	13.36	10.39	10.34	13.37	10.52	10.44	13.49	-3.76	-4.02	-0.88	12.61	14
	6345	79	10.30	10.54	13.43	10.37	10.53	13.46	10.32	10.60	13.47	-3.76	-4.02	-0.88	12.59	14
UNII7	6665	143	11.12	10.69	13.92	11.12	10.61	13.88	11.12	10.55	13.85	-5.82	-5.08	-2.43	11.49	14

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	-3.68	-2.77	-0.19	-3.59	-2.30	0.11	-3.45	-1.72	0.51	-3.76	-4.02	-0.88	-0.37	14
	6265	63	-3.64	-2.45	0.01	-3.69	-2.03	0.23	-3.84	-1.59	0.44	-3.76	-4.02	-0.88	-0.44	14
UNII5 106T+26T	6105	31	1.02	0.48	3.77	1.11	0.57	3.86	1.15	0.63	3.91	-3.76	-4.02	-0.88	3.03	14
	6265	63	1.17	1.11	4.15	1.16	1.13	4.15	0.99	1.10	4.06	-3.76	-4.02	-0.88	3.27	14
UNII5 484T+242T	6105	31	6.99	6.16	9.61	6.97	6.14	9.59	6.95	6.10	9.56	-3.76	-4.02	-0.88	8.73	14
	6265	63	6.99	6.37	9.70	7.03	6.37	9.72	7.12	6.41	9.79	-3.76	-4.02	-0.88	8.91	14

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	-5.04	-3.34	-1.09	-4.60	-2.57	-0.46	-4.07	-1.59	0.36	-3.76	-4.02	-0.88	-0.52	14
	6265	63	-5.68	-3.30	-1.32	-5.33	-2.66	-0.78	-4.83	-1.92	-0.13	-3.76	-4.02	-0.88	-1.01	14
UNII5 106T+26T	6105	31	1.05	0.62	3.85	1.13	0.72	3.94	0.95	0.62	3.79	-3.76	-4.02	-0.88	3.06	14
	6265	63	0.82	0.99	3.92	0.84	1.14	4.01	0.57	0.98	3.79	-3.76	-4.02	-0.88	3.13	14
UNII5 484T+242T	6105	31	6.86	6.14	9.52	6.86	6.15	9.53	6.93	6.18	9.58	-3.76	-4.02	-0.88	8.70	14
	6265	63	6.56	6.15	9.37	6.60	6.18	9.40	6.68	6.21	9.46	-3.76	-4.02	-0.88	8.58	14

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	-4.20	-1.58	0.31	-4.94	-2.02	-0.23	-6.18	-2.92	-1.24	-3.76	-4.02	-0.88	-0.57	14
	6265	63	-4.89	-1.99	-0.19	-5.59	-2.74	-0.92	-6.41	-3.69	-1.83	-3.76	-4.02	-0.88	-1.07	14
UNII5 106T+26T	6105	31	1.47	1.06	4.28	1.18	0.83	4.02	0.95	0.71	3.84	-3.76	-4.02	-0.88	3.40	14
	6265	63	1.00	1.51	4.27	0.68	1.21	3.96	0.61	1.23	3.94	-3.76	-4.02	-0.88	3.39	14
UNII5 484T+242T	6105	31	7.11	6.39	9.78	7.15	6.42	9.81	7.20	6.44	9.84	-3.76	-4.02	-0.88	8.96	14
	6265	63	7.13	7.23	10.19	7.17	7.26	10.23	7.19	7.27	10.24	-3.76	-4.02	-0.88	9.36	14

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 52T+26T	6105	31	-4.65	-1.01	0.55	-5.02	-1.30	0.24	-5.54	-1.84	-0.30	-3.76	-4.02	-0.88	-0.33	14
	6265	63	-4.56	-1.81	0.04	-4.54	-2.27	-0.25	-4.45	-2.72	-0.49	-3.76	-4.02	-0.88	-0.84	14
UNII5 106T+26T	6105	31	0.98	0.78	3.89	0.77	0.66	3.73	0.54	0.51	3.54	-3.76	-4.02	-0.88	3.01	14
	6265	63	0.66	1.25	3.98	0.66	1.09	3.89	0.78	1.12	3.96	-3.76	-4.02	-0.88	3.10	14
UNII5 484T+242T	6105	31	7.21	7.15	10.19	7.22	7.17	10.21	7.30	7.22	10.27	-3.76	-4.02	-0.88	9.39	14
	6265	63	7.26	7.09	10.18	7.25	7.11	10.19	7.24	7.11	10.18	-3.76	-4.02	-0.88	9.31	14

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	10.21	9.62	12.94	10.22	9.58	12.92	10.29	9.61	12.98	-3.76	-4.02	-0.88	12.10	14
	6265	63	9.87	9.89	12.89	9.92	9.90	12.92	10.08	10.00	13.05	-3.76	-4.02	-0.88	12.17	14
UNII5 160U	6105	31	9.94	9.84	12.90	10.06	9.87	12.98	10.20	9.96	13.09	-3.76	-4.02	-0.88	12.21	14
	6265	63	9.73	9.93	12.84	9.78	9.94	12.87	9.79	10.03	12.92	-3.76	-4.02	-0.88	12.04	14

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 3x996T	6105	31	11.11	11.06	14.10	11.17	11.07	14.13	11.41	11.18	14.30	-3.76	-4.02	-0.88	13.42	14
	6265	63	11.30	11.29	14.30	11.42	11.36	14.40	11.58	11.47	14.53	-3.76	-4.02	-0.88	13.65	14
UNII5 2x996T+484T	6105	31	11.31	11.47	14.40	11.41	11.49	14.46	11.19	11.39	14.30	-3.76	-4.02	-0.88	13.58	14
	6265	63	11.47	11.73	14.61	11.64	11.82	14.74	11.38	11.59	14.50	-3.76	-4.02	-0.88	13.86	14
UNII5 3x996T+484T	6105	31	11.08	11.26	14.18	11.11	11.27	14.20	11.20	11.33	14.27	-3.76	-4.02	-0.88	13.39	14
	6265	63	11.31	11.53	14.43	11.39	11.57	14.49	11.42	11.61	14.53	-3.76	-4.02	-0.88	13.65	14

10.4 POWER SPECTRAL DENSITY

10.4.1 Indoor client

Indoor client Limit : -1 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-5.514	-3.121	-1.145	-7.084	-4.354	-2.498	-5.745	-3.169	-1.259	-3.76	-4.02	-0.88	-2.025	-1
	6175	45	-6.374	-2.979	-1.343	-7.979	-4.470	-2.869	-6.673	-2.868	-1.356	-3.76	-4.02	-0.88	-2.223	-1
	6415	93	-7.072	-3.620	-2.001	-8.277	-5.330	-3.548	-6.802	-3.795	-2.033	-3.76	-4.02	-0.88	-2.881	-1
UNII6	6435	97	-6.665	-3.672	-1.905	-8.051	-4.638	-3.007	-6.824	-3.718	-1.989	-5.82	-5.08	-2.43	-4.335	-1
	6475	105	-6.958	-3.566	-1.929	-8.481	-4.946	-3.353	-7.175	-3.625	-2.037	-5.82	-5.08	-2.43	-4.359	-1
	6515	113	-6.554	-3.861	-1.992	-7.934	-5.158	-3.318	-6.504	-4.100	-2.128	-5.82	-5.08	-2.43	-4.422	-1
UNII7	6535	117	-6.620	-3.412	-1.716	-7.892	-4.819	-3.079	-6.471	-3.579	-1.778	-5.82	-5.08	-2.43	-4.146	-1
	6695	149	-7.152	-3.760	-2.123	-8.753	-5.055	-3.512	-7.253	-3.772	-2.162	-5.82	-5.08	-2.43	-4.553	-1
	6855	181	-7.111	-3.311	-1.798	-8.178	-4.990	-3.288	-6.966	-3.394	-1.812	-5.82	-5.08	-2.43	-4.228	-1
UNII8	6875	185	-6.956	-3.291	-1.738	-8.651	-5.016	-3.454	-6.968	-3.592	-1.950	-5.63	-5.26	-2.43	-4.168	-1
	6995	209	-7.372	-3.483	-1.996	-9.069	-5.131	-3.658	-7.425	-3.758	-2.205	-5.63	-5.26	-2.43	-4.426	-1
	7115	233	-7.035	-3.956	-2.218	-8.419	-5.060	-3.412	-7.338	-3.808	-2.214	-5.63	-5.26	-2.43	-4.644	-1

Mode : EHT20 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.698	-3.786	-0.732	-3.481	-3.756	-0.606	-3.651	-3.896	-0.762	-3.76	-4.02	-0.88	-1.486	-1
	6175	45	-3.273	-3.483	-0.366	-3.419	-3.869	-0.628	-3.378	-3.730	-0.540	-3.76	-4.02	-0.88	-1.246	-1
	6415	93	-4.223	-2.581	-0.315	-4.446	-3.014	-0.661	-3.981	-2.652	-0.256	-3.76	-4.02	-0.88	-1.136	-1
UNII6	6435	97	-3.778	-2.941	-0.329	-3.958	-2.751	-0.302	-3.666	-2.747	-0.172	-5.82	-5.08	-2.43	-2.602	-1
	6475	105	-3.740	-2.960	-0.322	-3.907	-3.021	-0.431	-3.489	-2.822	-0.132	-5.82	-5.08	-2.43	-2.562	-1
	6515	113	-3.389	-2.701	-0.021	-4.070	-3.059	-0.525	-3.843	-2.739	-0.246	-5.82	-5.08	-2.43	-2.451	-1
UNII7	6535	117	-3.593	-2.934	-0.241	-3.505	-3.336	-0.409	-3.691	-2.847	-0.238	-5.82	-5.08	-2.43	-2.668	-1
	6695	149	-2.867	-3.270	-0.054	-3.304	-3.582	-0.431	-3.221	-3.217	-0.209	-5.82	-5.08	-2.43	-2.484	-1
	6855	181	-2.507	-2.684	0.416	-2.774	-3.010	0.120	-2.588	-2.304	0.567	-5.82	-5.08	-2.43	-1.863	-1
UNII8	6875	185	-2.942	-3.073	0.003	-3.296	-3.514	-0.393	-3.103	-3.124	-0.103	-5.63	-5.26	-2.43	-2.427	-1
	6995	209	-2.685	-3.688	-0.147	-2.987	-4.132	-0.512	-2.716	-3.345	-0.009	-5.63	-5.26	-2.43	-2.439	-1
	7115	233	-3.024	-3.617	-0.300	-3.257	-3.931	-0.571	-2.965	-3.691	-0.303	-5.63	-5.26	-2.43	-2.730	-1

Mode : EHT20 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.573	-3.552	-0.552	-	-	-	-3.635	-3.500	-0.556	-3.76	-4.02	-0.88	-1.432	-1
	6175	45	-2.996	-3.458	-0.210	-	-	-	-3.009	-3.502	-0.238	-3.76	-4.02	-0.88	-1.090	-1
	6415	93	-3.841	-3.299	-0.551	-	-	-	-3.851	-3.107	-0.453	-3.76	-4.02	-0.88	-1.333	-1
UNII6	6435	97	-3.474	-2.898	-0.166	-	-	-	-3.550	-2.923	-0.215	-5.82	-5.08	-2.43	-2.596	-1
	6475	105	-3.539	-2.851	-0.171	-	-	-	-3.574	-3.000	-0.267	-5.82	-5.08	-2.43	-2.601	-1
	6515	113	-3.445	-2.959	-0.185	-	-	-	-3.502	-2.996	-0.231	-5.82	-5.08	-2.43	-2.615	-1
UNII7	6535	117	-3.207	-3.137	-0.161	-	-	-	-3.175	-3.058	-0.106	-5.82	-5.08	-2.43	-2.536	-1
	6695	149	-2.999	-3.236	-0.105	-	-	-	-3.010	-3.444	-0.211	-5.82	-5.08	-2.43	-2.535	-1
	6855	181	-2.414	-2.931	0.346	-	-	-	-2.648	-3.209	0.091	-5.82	-5.08	-2.43	-2.084	-1
UNII8	6875	185	-2.544	-3.383	0.067	-	-	-	-2.690	-3.385	-0.013	-5.63	-5.26	-2.43	-2.363	-1
	6995	209	-2.469	-3.650	-0.009	-	-	-	-2.732	-3.909	-0.270	-5.63	-5.26	-2.43	-2.439	-1
	7115	233	-2.955	-3.941	-0.410	-	-	-	-3.201	-3.704	-0.435	-5.63	-5.26	-2.43	-2.840	-1

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-5.172	-5.647	-2.393	-	-	-	-3.76	-4.02	-0.88	-3.273	-1
	6175	45	-	-	-	-3.048	-3.890	-0.438	-	-	-	-3.76	-4.02	-0.88	-1.318	-1
	6415	93	-	-	-	-4.146	-3.514	-0.808	-	-	-	-3.76	-4.02	-0.88	-1.688	-1
UNII6	6435	97	-	-	-	-2.808	-1.905	0.677	-	-	-	-5.82	-5.08	-2.43	-1.753	-1
	6475	105	-	-	-	-2.955	-1.932	0.597	-	-	-	-5.82	-5.08	-2.43	-1.833	-1
	6515	113	-	-	-	-3.142	-2.167	0.383	-	-	-	-5.82	-5.08	-2.43	-2.047	-1
UNII7	6535	117	-	-	-	-2.708	-2.161	0.585	-	-	-	-5.82	-5.08	-2.43	-1.845	-1
	6695	149	-	-	-	-2.309	-2.829	0.449	-	-	-	-5.82	-5.08	-2.43	-1.981	-1
	6855	181	-	-	-	-1.830	-2.006	1.093	-	-	-	-5.82	-5.08	-2.43	-1.337	-1
UNII8	6875	185	-	-	-	-2.331	-2.875	0.416	-	-	-	-5.63	-5.26	-2.43	-2.014	-1
	6995	209	-	-	-	-1.798	-2.662	0.802	-	-	-	-5.63	-5.26	-2.43	-1.628	-1
	7115	233	-	-	-	-6.746	-7.593	-4.138	-	-	-	-5.63	-5.26	-2.43	-6.568	-1

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-5.393	-5.960	-2.657	-	-	-	-3.76	-4.02	-0.88	-3.537	-1
	6175	45	-	-	-	-3.325	-3.655	-0.476	-	-	-	-3.76	-4.02	-0.88	-1.356	-1
	6415	93	-	-	-	-4.466	-3.169	-0.759	-	-	-	-3.76	-4.02	-0.88	-1.639	-1
UNII6	6435	97	-	-	-	-3.346	-2.230	0.258	-	-	-	-5.82	-5.08	-2.43	-2.172	-1
	6475	105	-	-	-	-3.406	-2.508	0.077	-	-	-	-5.82	-5.08	-2.43	-2.353	-1
	6515	113	-	-	-	-3.400	-2.525	0.070	-	-	-	-5.82	-5.08	-2.43	-2.360	-1
UNII7	6535	117	-	-	-	-3.322	-2.503	0.117	-	-	-	-5.82	-5.08	-2.43	-2.313	-1
	6695	149	-	-	-	-2.941	-3.204	-0.060	-	-	-	-5.82	-5.08	-2.43	-2.490	-1
	6855	181	-	-	-	-2.435	-2.425	0.580	-	-	-	-5.82	-5.08	-2.43	-1.850	-1
UNII8	6875	185	-	-	-	-2.288	-2.375	0.679	-	-	-	-5.63	-5.26	-2.43	-1.751	-1
	6995	209	-	-	-	-1.701	-2.432	0.959	-	-	-	-5.63	-5.26	-2.43	-1.471	-1
	7115	233	-	-	-	-7.011	-7.827	-4.389	-	-	-	-5.63	-5.26	-2.43	-6.819	-1

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-5.454	-2.923	-0.996	-5.805	-3.293	-1.359	-5.542	-2.953	-1.047	-3.76	-4.02	-0.88	-1.876	-1
	6165	43	-5.534	-2.960	-1.049	-5.899	-2.498	-0.863	-5.958	-2.682	-1.008	-3.76	-4.02	-0.88	-1.743	-1
	6405	91	-6.867	-3.794	-2.054	-6.871	-4.046	-2.222	-6.647	-4.046	-2.144	-3.76	-4.02	-0.88	-2.934	-1
UNII6	6445	99	-6.550	-3.843	-1.978	-6.640	-3.874	-2.030	-6.260	-4.185	-2.089	-5.82	-5.08	-2.43	-4.408	-1
	6485	107	-6.594	-3.539	-1.793	-6.806	-3.758	-2.009	-6.665	-3.476	-1.774	-5.82	-5.08	-2.43	-4.204	-1
	6525	115	-6.490	-3.735	-1.887	-6.611	-4.017	-2.113	-6.384	-4.016	-2.030	-5.82	-5.08	-2.43	-4.317	-1
UNII7	6565	123	-5.977	-3.748	-1.711	-6.169	-4.057	-1.975	-6.074	-3.933	-1.862	-5.82	-5.08	-2.43	-4.141	-1
	6685	147	-6.943	-4.016	-2.227	-7.506	-4.240	-2.562	-7.437	-4.200	-2.513	-5.82	-5.08	-2.43	-4.657	-1
	6845	179	-6.821	-3.391	-1.765	-6.986	-3.632	-1.982	-7.345	-3.351	-1.894	-5.82	-5.08	-2.43	-4.195	-1
UNII8	6885	187	-6.952	-3.340	-1.770	-7.441	-3.123	-1.756	-7.418	-3.283	-1.865	-5.63	-5.26	-2.43	-4.186	-1
	7005	211	-6.798	-3.435	-1.788	-6.957	-3.231	-1.696	-7.495	-3.590	-2.107	-5.63	-5.26	-2.43	-4.126	-1
	7085	227	-5.636	-3.302	-1.304	-6.409	-3.479	-1.691	-6.631	-3.494	-1.775	-5.63	-5.26	-2.43	-3.734	-1