

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.344	-3.741	-0.528	-3.925	-3.958	-0.931	-3.911	-3.951	-0.921	-3.76	-4.02	-0.88	-1.408	-1
	6165	43	-3.506	-3.985	-0.729	-3.750	-4.062	-0.893	-3.794	-4.165	-0.965	-3.76	-4.02	-0.88	-1.609	-1
	6405	91	-4.001	-3.477	-0.721	-4.220	-3.226	-0.684	-3.866	-3.278	-0.552	-3.76	-4.02	-0.88	-1.432	-1
UNII6	6445	99	-3.660	-2.971	-0.291	-3.949	-3.054	-0.468	-3.938	-2.996	-0.431	-5.82	-5.08	-2.43	-2.721	-1
	6485	107	-3.838	-2.733	-0.240	-4.053	-3.165	-0.576	-3.810	-2.985	-0.368	-5.82	-5.08	-2.43	-2.670	-1
	6525	115	-3.529	-2.930	-0.209	-4.032	-3.146	-0.556	-3.939	-3.210	-0.549	-5.82	-5.08	-2.43	-2.639	-1
UNII7	6565	123	-3.423	-3.438	-0.420	-3.706	-3.592	-0.638	-3.577	-3.885	-0.718	-5.82	-5.08	-2.43	-2.850	-1
	6685	147	-3.212	-3.333	-0.262	-3.463	-3.423	-0.433	-3.548	-3.291	-0.407	-5.82	-5.08	-2.43	-2.692	-1
	6845	179	-2.529	-2.984	0.260	-2.835	-3.097	0.046	-3.030	-2.645	0.177	-5.82	-5.08	-2.43	-2.170	-1
UNII8	6885	187	-2.829	-3.300	-0.048	-3.412	-3.516	-0.453	-3.349	-3.400	-0.364	-5.63	-5.26	-2.43	-2.478	-1
	7005	211	-2.746	-3.832	-0.245	-3.332	-4.273	-0.767	-3.196	-3.900	-0.523	-5.63	-5.26	-2.43	-2.675	-1
	7085	227	-2.847	-4.110	-0.422	-3.304	-4.442	-0.825	-3.227	-4.030	-0.600	-5.63	-5.26	-2.43	-2.852	-1

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.203	-3.453	-0.316	-3.388	-4.046	-0.694	-3.227	-3.896	-0.539	-3.76	-4.02	-0.88	-1.196	-1
	6165	43	-2.954	-3.414	-0.168	-3.439	-3.500	-0.459	-3.522	-3.349	-0.425	-3.76	-4.02	-0.88	-1.048	-1
	6405	91	-3.740	-3.195	-0.449	-3.799	-3.224	-0.492	-3.811	-3.269	-0.521	-3.76	-4.02	-0.88	-1.329	-1
UNII6	6445	99	-3.477	-2.969	-0.205	-3.370	-3.078	-0.211	-3.338	-3.216	-0.266	-5.82	-5.08	-2.43	-2.635	-1
	6485	107	-3.783	-2.897	-0.307	-3.936	-3.209	-0.547	-3.394	-2.985	-0.175	-5.82	-5.08	-2.43	-2.605	-1
	6525	115	-3.314	-3.043	-0.166	-3.532	-3.344	-0.427	-3.505	-3.043	-0.258	-5.82	-5.08	-2.43	-2.596	-1
UNII7	6565	123	-3.072	-3.530	-0.285	-3.416	-3.596	-0.495	-3.113	-3.577	-0.329	-5.82	-5.08	-2.43	-2.715	-1
	6685	147	-2.964	-3.499	-0.213	-3.078	-3.614	-0.328	-3.175	-3.366	-0.259	-5.82	-5.08	-2.43	-2.643	-1
	6845	179	-2.373	-3.495	0.112	-2.825	-3.319	-0.055	-2.826	-3.116	0.042	-5.82	-5.08	-2.43	-2.318	-1
UNII8	6885	187	-2.390	-3.622	0.048	-2.220	-3.541	0.180	-2.680	-3.511	-0.066	-5.63	-5.26	-2.43	-2.250	-1
	7005	211	-2.218	-3.579	0.165	-2.700	-4.083	-0.327	-2.853	-3.582	-0.192	-5.63	-5.26	-2.43	-2.265	-1
	7085	227	-2.517	-3.370	0.088	-2.696	-3.721	-0.168	-2.767	-3.458	-0.089	-5.63	-5.26	-2.43	-2.342	-1

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.159	-3.903	-0.505	-	-	-	-3.406	-3.945	-0.657	-3.76	-4.02	-0.88	-1.385	-1
	6165	43	-3.583	-4.101	-0.824	-	-	-	-3.980	-4.039	-0.999	-3.76	-4.02	-0.88	-1.704	-1
	6405	91	-4.057	-3.434	-0.724	-	-	-	-4.060	-3.525	-0.774	-3.76	-4.02	-0.88	-1.604	-1
UNII6	6445	99	-2.865	-1.902	0.654	-	-	-	-2.842	-2.014	0.602	-5.82	-5.08	-2.43	-1.776	-1
	6485	107	-3.223	-2.085	0.394	-	-	-	-2.904	-1.932	0.620	-5.82	-5.08	-2.43	-1.810	-1
	6525	115	-2.844	-2.199	0.501	-	-	-	-2.984	-2.286	0.389	-5.82	-5.08	-2.43	-1.929	-1
UNII7	6565	123	-2.386	-2.391	0.622	-	-	-	-2.416	-2.789	0.412	-5.82	-5.08	-2.43	-1.808	-1
	6685	147	-2.435	-2.727	0.432	-	-	-	-2.562	-2.886	0.289	-5.82	-5.08	-2.43	-1.998	-1
	6845	179	-1.852	-2.138	1.018	-	-	-	-1.918	-2.079	1.013	-5.82	-5.08	-2.43	-1.412	-1
UNII8	6885	187	-2.201	-2.981	0.437	-	-	-	-2.510	-2.917	0.302	-5.63	-5.26	-2.43	-1.993	-1
	7005	211	-2.135	-3.103	0.418	-	-	-	-2.529	-3.065	0.222	-5.63	-5.26	-2.43	-2.012	-1
	7085	227	-1.996	-2.719	0.668	-	-	-	-2.451	-3.002	0.293	-5.63	-5.26	-2.43	-1.762	-1

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-3.234	-3.912	-0.549	-	-	-	-3.76	-4.02	-0.88	-1.429	-1
	6165	43	-	-	-	-3.288	-3.685	-0.472	-	-	-	-3.76	-4.02	-0.88	-1.352	-1
	6405	91	-	-	-	-3.996	-3.285	-0.616	-	-	-	-3.76	-4.02	-0.88	-1.496	-1
UNII6	6445	99	-	-	-	-2.571	-2.082	0.691	-	-	-	-5.82	-5.08	-2.43	-1.739	-1
	6485	107	-	-	-	-2.861	-2.097	0.548	-	-	-	-5.82	-5.08	-2.43	-1.882	-1
	6525	115	-	-	-	-2.758	-2.345	0.464	-	-	-	-5.82	-5.08	-2.43	-1.966	-1
UNII7	6565	123	-	-	-	-2.463	-2.863	0.352	-	-	-	-5.82	-5.08	-2.43	-2.078	-1
	6685	147	-	-	-	-2.281	-2.782	0.486	-	-	-	-5.82	-5.08	-2.43	-1.944	-1
	6845	179	-	-	-	-1.837	-2.229	0.982	-	-	-	-5.82	-5.08	-2.43	-1.448	-1
UNII8	6885	187	-	-	-	-2.088	-2.568	0.689	-	-	-	-5.63	-5.26	-2.43	-1.741	-1
	7005	211	-	-	-	-1.577	-2.565	0.967	-	-	-	-5.63	-5.26	-2.43	-1.463	-1
	7085	227	-	-	-	-1.997	-2.738	0.659	-	-	-	-5.63	-5.26	-2.43	-1.771	-1

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-3.473	-3.872	-0.658	-	-	-	-3.76	-4.02	-0.88	-1.538	-1
	6165	43	-	-	-	-3.507	-3.585	-0.535	-	-	-	-3.76	-4.02	-0.88	-1.415	-1
	6405	91	-	-	-	-4.457	-3.899	-1.159	-	-	-	-3.76	-4.02	-0.88	-2.039	-1
UNII6	6445	99	-	-	-	-3.195	-2.525	0.163	-	-	-	-5.82	-5.08	-2.43	-2.267	-1
	6485	107	-	-	-	-3.369	-2.546	0.072	-	-	-	-5.82	-5.08	-2.43	-2.358	-1
	6525	115	-	-	-	-3.292	-2.655	0.049	-	-	-	-5.82	-5.08	-2.43	-2.381	-1
UNII7	6565	123	-	-	-	-2.715	-3.237	0.042	-	-	-	-5.82	-5.08	-2.43	-2.388	-1
	6685	147	-	-	-	-2.906	-2.939	0.088	-	-	-	-5.82	-5.08	-2.43	-2.342	-1
	6845	179	-	-	-	-2.148	-2.723	0.584	-	-	-	-5.82	-5.08	-2.43	-1.846	-1
UNII8	6885	187	-	-	-	-2.209	-2.584	0.618	-	-	-	-5.63	-5.26	-2.43	-1.812	-1
	7005	211	-	-	-	-1.620	-2.357	1.037	-	-	-	-5.63	-5.26	-2.43	-1.393	-1
	7085	227	-	-	-	-2.078	-2.827	0.574	-	-	-	-5.63	-5.26	-2.43	-1.856	-1

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-5.710	-3.219	-1.278	-6.081	-2.778	-1.112	-6.288	-2.827	-1.211	-3.76	-4.02	-0.88	-1.992	-1
	6145	39	-5.886	-3.069	-1.242	-6.477	-3.155	-1.495	-6.676	-3.152	-1.555	-3.76	-4.02	-0.88	-2.122	-1
	6385	87	-7.591	-3.953	-2.391	-7.467	-4.135	-2.478	-7.195	-4.483	-2.620	-3.76	-4.02	-0.88	-3.271	-1
UNII6	6465	103	-6.503	-3.931	-2.019	-6.977	-4.888	-2.797	-6.445	-4.908	-2.598	-5.82	-5.08	-2.43	-4.449	-1
	6545	119	-7.115	-4.112	-2.348	-6.588	-3.769	-1.943	-6.499	-4.117	-2.136	-5.82	-5.08	-2.43	-4.373	-1
UNII7	6625	135	-6.368	-3.223	-1.506	-6.426	-3.125	-1.458	-6.170	-2.842	-1.184	-5.82	-5.08	-2.43	-3.614	-1
	6705	151	-7.684	-4.568	-2.842	-8.192	-4.629	-3.044	-7.657	-4.282	-2.639	-5.82	-5.08	-2.43	-5.069	-1
	6785	167	-6.905	-3.584	-1.924	-7.343	-3.768	-2.187	-7.341	-3.614	-2.079	-5.82	-5.08	-2.43	-4.354	-1
UNII8	6865	183	-6.726	-3.262	-1.647	-7.509	-3.680	-2.175	-7.536	-3.721	-2.212	-5.63	-5.26	-2.43	-4.077	-1
	6945	199	-6.660	-3.688	-1.914	-7.789	-4.121	-2.568	-7.539	-3.834	-2.292	-5.63	-5.26	-2.43	-4.344	-1
	7025	215	-6.240	-3.430	-1.601	-6.835	-4.091	-2.239	-7.427	-3.863	-2.279	-5.63	-5.26	-2.43	-4.031	-1

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-3.528	-3.857	-0.679	-3.547	-4.265	-0.881	-3.655	-4.488	-1.041	-3.76	-4.02	-0.88	-1.559	-1
	6145	39	-3.441	-4.061	-0.729	-3.625	-4.319	-0.948	-3.676	-4.385	-1.006	-3.76	-4.02	-0.88	-1.609	-1
	6385	87	-4.287	-3.835	-1.045	-4.573	-4.011	-1.272	-4.382	-4.166	-1.262	-3.76	-4.02	-0.88	-1.925	-1
UNII6	6465	103	-4.040	-2.670	-0.291	-3.729	-2.993	-0.335	-3.796	-2.924	-0.328	-5.82	-5.08	-2.43	-2.721	-1
	6545	119	-3.606	-3.406	-0.494	-3.374	-3.312	-0.332	-3.440	-3.204	-0.310	-5.82	-5.08	-2.43	-2.740	-1
UNII7	6625	135	-3.247	-3.218	-0.222	-3.144	-3.624	-0.367	-3.161	-3.316	-0.227	-5.82	-5.08	-2.43	-2.652	-1
	6705	151	-3.282	-3.710	-0.480	-3.187	-3.227	-0.196	-3.495	-3.315	-0.394	-5.82	-5.08	-2.43	-2.626	-1
	6785	167	-2.986	-3.337	-0.147	-3.129	-3.697	-0.393	-3.145	-3.371	-0.246	-5.82	-5.08	-2.43	-2.577	-1
UNII8	6865	183	-2.597	-3.512	-0.020	-3.164	-3.227	-0.185	-3.720	-3.123	-0.401	-5.63	-5.26	-2.43	-2.450	-1
	6945	199	-2.453	-3.916	-0.113	-3.151	-3.893	-0.496	-3.552	-3.166	-0.344	-5.63	-5.26	-2.43	-2.543	-1
	7025	215	-2.757	-4.320	-0.458	-3.016	-4.506	-0.687	-3.688	-4.493	-1.061	-5.63	-5.26	-2.43	-2.888	-1

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.078	-3.921	-0.469	-3.393	-4.100	-0.722	-3.316	-3.707	-0.497	-3.76	-4.02	-0.88	-1.349	-1
	6145	39	-3.138	-3.422	-0.268	-3.233	-3.693	-0.447	-3.311	-3.902	-0.586	-3.76	-4.02	-0.88	-1.148	-1
	6385	87	-3.853	-3.389	-0.605	-3.923	-3.305	-0.593	-3.572	-3.324	-0.436	-3.76	-4.02	-0.88	-1.316	-1
UNII6	6465	103	-3.674	-2.879	-0.248	-3.673	-2.778	-0.192	-3.545	-3.014	-0.261	-5.82	-5.08	-2.43	-2.622	-1
	6545	119	-3.226	-3.433	-0.318	-3.317	-3.222	-0.259	-3.022	-3.399	-0.196	-5.82	-5.08	-2.43	-2.626	-1
UNII7	6625	135	-2.854	-3.534	-0.171	-3.155	-3.391	-0.261	-2.920	-3.066	0.018	-5.82	-5.08	-2.43	-2.412	-1
	6705	151	-2.824	-3.702	-0.231	-2.902	-3.404	-0.136	-3.237	-3.199	-0.208	-5.82	-5.08	-2.43	-2.566	-1
	6785	167	-2.866	-3.703	-0.254	-2.938	-3.662	-0.275	-2.839	-3.557	-0.173	-5.82	-5.08	-2.43	-2.603	-1
UNII8	6865	183	-2.351	-3.842	-0.023	-2.677	-3.676	-0.138	-2.844	-3.338	-0.074	-5.63	-5.26	-2.43	-2.453	-1
	6945	199	-2.466	-4.138	-0.212	-3.019	-4.087	-0.510	-3.443	-3.988	-0.697	-5.63	-5.26	-2.43	-2.642	-1
	7025	215	-2.779	-4.266	-0.449	-3.191	-4.372	-0.731	-3.614	-4.100	-0.840	-5.63	-5.26	-2.43	-2.879	-1

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.395	-3.897	-0.628	-3.192	-3.778	-0.465	-3.367	-3.704	-0.522	-3.76	-4.02	-0.88	-1.345	-1
	6145	39	-3.485	-3.797	-0.628	-3.534	-3.712	-0.612	-3.445	-3.840	-0.628	-3.76	-4.02	-0.88	-1.492	-1
	6385	87	-4.074	-3.389	-0.708	-4.044	-3.433	-0.717	-3.863	-3.332	-0.579	-3.76	-4.02	-0.88	-1.459	-1
UNII6	6465	103	-3.432	-2.247	0.211	-3.752	-2.102	0.161	-3.444	-2.729	-0.061	-5.82	-5.08	-2.43	-2.219	-1
	6545	119	-2.624	-2.080	0.667	-2.678	-1.956	0.708	-2.615	-2.564	0.421	-5.82	-5.08	-2.43	-1.722	-1
UNII7	6625	135	-2.234	-2.547	0.623	-2.181	-2.496	0.675	-2.413	-2.086	0.764	-5.82	-5.08	-2.43	-1.666	-1
	6705	151	-2.341	-2.828	0.433	-2.489	-2.731	0.402	-2.304	-2.591	0.565	-5.82	-5.08	-2.43	-1.865	-1
	6785	167	-2.020	-2.748	0.642	-2.291	-2.656	0.541	-2.370	-2.715	0.471	-5.82	-5.08	-2.43	-1.788	-1
UNII8	6865	183	-1.924	-2.750	0.693	-1.689	-2.622	0.880	-2.745	-2.902	0.188	-5.63	-5.26	-2.43	-1.550	-1
	6945	199	-1.852	-3.108	0.576	-2.443	-3.346	0.139	-3.018	-3.087	-0.042	-5.63	-5.26	-2.43	-1.854	-1
	7025	215	-1.874	-3.071	0.579	-2.037	-2.955	0.539	-2.409	-2.944	0.342	-5.63	-5.26	-2.43	-1.851	-1

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-3.393	-3.852	-0.606	-	-	-	-3.549	-3.725	-0.626	-3.76	-4.02	-0.88	-1.486	-1
	6145	39	-3.215	-3.576	-0.382	-	-	-	-3.571	-3.781	-0.665	-3.76	-4.02	-0.88	-1.262	-1
	6385	87	-3.939	-3.323	-0.610	-	-	-	-3.884	-3.402	-0.626	-3.76	-4.02	-0.88	-1.490	-1
UNII6	6465	103	-2.830	-2.050	0.588	-	-	-	-2.621	-2.012	0.704	-5.82	-5.08	-2.43	-1.726	-1
	6545	119	-2.600	-2.356	0.534	-	-	-	-2.352	-2.494	0.588	-5.82	-5.08	-2.43	-1.842	-1
UNII7	6625	135	-1.966	-2.806	0.644	-	-	-	-2.160	-2.557	0.656	-5.82	-5.08	-2.43	-1.774	-1
	6705	151	-2.240	-2.722	0.536	-	-	-	-2.251	-2.622	0.578	-5.82	-5.08	-2.43	-1.852	-1
	6785	167	-1.980	-2.727	0.673	-	-	-	-2.258	-2.697	0.538	-5.82	-5.08	-2.43	-1.757	-1
UNII8	6865	183	-1.728	-2.648	0.846	-	-	-	-2.387	-2.369	0.632	-5.63	-5.26	-2.43	-1.584	-1
	6945	199	-1.828	-2.949	0.658	-	-	-	-2.941	-2.867	0.106	-5.63	-5.26	-2.43	-1.772	-1
	7025	215	-1.644	-3.035	0.726	-	-	-	-2.126	-2.882	0.523	-5.63	-5.26	-2.43	-1.704	-1

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-3.209	-3.246	-0.217	-	-	-	-3.76	-4.02	-0.88	-1.097	-1
	6145	39	-	-	-	-3.274	-3.108	-0.180	-	-	-	-3.76	-4.02	-0.88	-1.060	-1
	6385	87	-	-	-	-3.601	-2.938	-0.247	-	-	-	-3.76	-4.02	-0.88	-1.127	-1
UNII6	6465	103	-	-	-	-2.891	-2.189	0.484	-	-	-	-5.82	-5.08	-2.43	-1.946	-1
	6545	119	-	-	-	-2.431	-2.712	0.441	-	-	-	-5.82	-5.08	-2.43	-1.989	-1
UNII7	6625	135	-	-	-	-2.271	-2.669	0.545	-	-	-	-5.82	-5.08	-2.43	-1.885	-1
	6705	151	-	-	-	-2.500	-2.766	0.379	-	-	-	-5.82	-5.08	-2.43	-2.051	-1
	6785	167	-	-	-	-1.974	-2.716	0.681	-	-	-	-5.82	-5.08	-2.43	-1.749	-1
UNII8	6865	183	-	-	-	-1.931	-2.606	0.755	-	-	-	-5.63	-5.26	-2.43	-1.675	-1
	6945	199	-	-	-	-1.985	-2.767	0.652	-	-	-	-5.63	-5.26	-2.43	-1.778	-1
	7025	215	-	-	-	-2.017	-2.483	0.766	-	-	-	-5.63	-5.26	-2.43	-1.664	-1

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-3.321	-3.782	-0.535	-	-	-	-3.76	-4.02	-0.88	-1.415	-1
	6145	39	-	-	-	-3.640	-3.578	-0.599	-	-	-	-3.76	-4.02	-0.88	-1.479	-1
	6385	87	-	-	-	-4.031	-3.373	-0.679	-	-	-	-3.76	-4.02	-0.88	-1.559	-1
UNII6	6465	103	-	-	-	-3.383	-2.554	0.062	-	-	-	-5.82	-5.08	-2.43	-2.368	-1
	6545	119	-	-	-	-2.728	-3.070	0.115	-	-	-	-5.82	-5.08	-2.43	-2.315	-1
UNII7	6625	135	-	-	-	-2.528	-2.937	0.283	-	-	-	-5.82	-5.08	-2.43	-2.147	-1
	6705	151	-	-	-	-2.784	-2.907	0.165	-	-	-	-5.82	-5.08	-2.43	-2.265	-1
	6785	167	-	-	-	-2.552	-3.027	0.227	-	-	-	-5.82	-5.08	-2.43	-2.203	-1
UNII8	6865	183	-	-	-	-1.907	-2.648	0.749	-	-	-	-5.63	-5.26	-2.43	-1.681	-1
	6945	199	-	-	-	-1.626	-2.633	0.910	-	-	-	-5.63	-5.26	-2.43	-1.520	-1
	7025	215	-	-	-	-1.582	-2.124	1.166	-	-	-	-5.63	-5.26	-2.43	-1.264	-1

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-7.077	-5.340	-3.112	-6.513	-4.332	-2.276	-7.282	-5.113	-3.053	-3.76	-4.02	-0.88	-3.156	-1
	6185	47	-7.368	-4.695	-2.818	-7.565	-4.563	-2.799	-7.080	-4.481	-2.578	-3.76	-4.02	-0.88	-3.458	-1
	6345	79	-7.654	-4.970	-3.097	-7.716	-5.065	-3.181	-7.596	-4.840	-2.992	-3.76	-4.02	-0.88	-3.872	-1
UNII6	6505	111	-8.391	-4.610	-3.091	-8.279	-4.873	-3.240	-7.761	-4.736	-2.980	-5.82	-5.08	-2.43	-5.410	-1
UNII7	6665	143	-7.574	-4.217	-2.568	-7.057	-4.006	-2.258	-6.314	-3.857	-1.903	-5.82	-5.08	-2.43	-4.333	-1
UNII8	6825	175	-8.227	-4.742	-3.133	-7.709	-4.584	-2.861	-8.311	-4.659	-3.101	-5.63	-5.26	-2.43	-5.291	-1
	6985	207	-7.386	-4.325	-2.581	-8.042	-4.200	-2.699	-8.171	-4.918	-3.236	-5.63	-5.26	-2.43	-5.011	-1

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-3.396	-4.251	-0.792	-4.421	-4.929	-1.657	-4.691	-4.753	-1.711	-3.76	-4.02	-0.88	-1.672	-1
	6185	47	-4.071	-4.202	-1.125	-4.028	-4.469	-1.232	-4.869	-4.437	-1.637	-3.76	-4.02	-0.88	-2.005	-1
	6345	79	-4.254	-3.535	-0.869	-4.145	-3.726	-0.920	-4.355	-3.418	-0.851	-3.76	-4.02	-0.88	-1.731	-1
UNII6	6505	111	-4.928	-3.289	-1.021	-4.667	-3.775	-1.187	-4.542	-3.692	-1.086	-5.82	-5.08	-2.43	-3.451	-1
UNII7	6665	143	-4.274	-5.013	-1.617	-4.229	-4.852	-1.519	-4.313	-4.918	-1.594	-5.82	-5.08	-2.43	-3.949	-1
UNII8	6825	175	-3.785	-4.206	-0.980	-3.812	-4.437	-1.103	-4.139	-3.942	-1.029	-5.63	-5.26	-2.43	-3.410	-1
	6985	207	-3.363	-5.064	-1.120	-3.765	-5.565	-1.562	-4.671	-5.553	-2.079	-5.63	-5.26	-2.43	-3.550	-1

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.320	-4.017	-0.644	-3.829	-4.182	-0.992	-4.013	-4.464	-1.222	-3.76	-4.02	-0.88	-1.524	-1
	6185	47	-3.537	-4.039	-0.770	-3.825	-3.534	-0.667	-3.790	-4.434	-1.090	-3.76	-4.02	-0.88	-1.547	-1
	6345	79	-3.576	-3.190	-0.368	-3.521	-3.365	-0.432	-3.481	-3.413	-0.437	-3.76	-4.02	-0.88	-1.248	-1
UNII6	6505	111	-4.095	-3.356	-0.699	-4.295	-3.484	-0.860	-4.201	-3.342	-0.740	-5.82	-5.08	-2.43	-3.129	-1
UNII7	6665	143	-3.841	-4.803	-1.285	-3.934	-4.519	-1.206	-3.337	-4.580	-0.904	-5.82	-5.08	-2.43	-3.334	-1
UNII8	6825	175	-3.129	-4.679	-0.825	-3.680	-4.848	-1.214	-3.536	-4.505	-0.983	-5.63	-5.26	-2.43	-3.255	-1
	6985	207	-2.990	-5.161	-0.931	-3.947	-5.856	-1.787	-4.116	-5.567	-1.771	-5.63	-5.26	-2.43	-3.361	-1

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.249	-4.263	-1.246	-4.257	-4.596	-1.413	-4.319	-4.701	-1.496	-3.76	-4.02	-0.88	-2.126	-1
	6185	47	-4.135	-4.351	-1.232	-4.254	-4.570	-1.399	-4.679	-4.578	-1.618	-3.76	-4.02	-0.88	-2.112	-1
	6345	79	-3.946	-3.817	-0.871	-4.155	-4.008	-1.071	-3.798	-3.866	-0.822	-3.76	-4.02	-0.88	-1.702	-1
UNII6	6505	111	-3.673	-2.247	0.108	-4.007	-2.573	-0.221	-3.910	-2.544	-0.164	-5.82	-5.08	-2.43	-2.322	-1
UNII7	6665	143	-2.931	-3.708	-0.292	-3.248	-3.882	-0.544	-2.977	-3.670	-0.300	-5.82	-5.08	-2.43	-2.722	-1
UNII8	6825	175	-2.659	-3.782	-0.174	-2.804	-3.956	-0.332	-3.018	-3.951	-0.450	-5.63	-5.26	-2.43	-2.604	-1
	6985	207	-2.533	-4.356	-0.340	-2.815	-4.069	-0.387	-3.615	-4.295	-0.932	-5.63	-5.26	-2.43	-2.770	-1

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.436	-3.324	-0.369	-	-	-	-3.613	-3.936	-0.761	-3.76	-4.02	-0.88	-1.249	-1
	6185	47	-3.817	-3.588	-0.691	-	-	-	-3.938	-3.808	-0.862	-3.76	-4.02	-0.88	-1.571	-1
	6345	79	-4.034	-3.611	-0.807	-	-	-	-4.123	-3.691	-0.891	-3.76	-4.02	-0.88	-1.687	-1
UNII6	6505	111	-3.793	-2.378	-0.018	-	-	-	-3.409	-2.693	-0.026	-5.82	-5.08	-2.43	-2.448	-1
UNII7	6665	143	-3.132	-3.630	-0.364	-	-	-	-2.926	-3.745	-0.306	-5.82	-5.08	-2.43	-2.736	-1
UNII8	6825	175	-2.382	-3.622	0.052	-	-	-	-2.747	-3.517	-0.105	-5.63	-5.26	-2.43	-2.378	-1
	6985	207	-2.694	-4.009	-0.292	-	-	-	-3.303	-4.422	-0.816	-5.63	-5.26	-2.43	-2.722	-1

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-3.806	-3.854	-0.820	-	-	-	-3.76	-4.02	-0.88	-1.700	-1
	6185	47	-	-	-	-3.904	-3.891	-0.887	-	-	-	-3.76	-4.02	-0.88	-1.767	-1
	6345	79	-	-	-	-4.074	-3.472	-0.752	-	-	-	-3.76	-4.02	-0.88	-1.632	-1
UNII6	6505	111	-	-	-	-3.832	-2.811	-0.281	-	-	-	-5.82	-5.08	-2.43	-2.711	-1
UNII7	6665	143	-	-	-	-2.987	-3.415	-0.185	-	-	-	-5.82	-5.08	-2.43	-2.615	-1
UNII8	6825	175	-	-	-	-2.866	-3.488	-0.155	-	-	-	-5.63	-5.26	-2.43	-2.585	-1
	6985	207	-	-	-	-5.358	-6.900	-3.051	-	-	-	-5.63	-5.26	-2.43	-5.481	-1

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-7.109	-3.819	-2.149	-7.676	-4.116	-2.530	-8.139	-4.301	-2.798	-3.76	-4.02	-0.88	-3.029	-1
	6185	47	-8.041	-4.046	-2.589	-8.205	-4.602	-3.029	-8.638	-5.497	-3.779	-3.76	-4.02	-0.88	-3.469	-1
	6345	79	-7.818	-4.945	-3.137	-7.575	-5.460	-3.379	-7.787	-5.603	-3.548	-3.76	-4.02	-0.88	-4.017	-1
UNII6	6505	111	-7.561	-5.220	-3.224	-7.490	-5.425	-3.325	-7.182	-6.249	-3.680	-5.82	-5.08	-2.43	-5.654	-1
UNII7	6665	143	-6.804	-3.657	-1.941	-7.237	-3.818	-2.189	-7.578	-3.650	-2.174	-5.82	-5.08	-2.43	-4.371	-1
UNII8	6825	175	-8.139	-4.138	-2.682	-8.964	-4.619	-3.259	-9.626	-4.839	-3.593	-5.63	-5.26	-2.43	-5.112	-1
	6985	207	-8.717	-4.831	-3.342	-9.414	-5.192	-3.798	-10.411	-5.981	-4.643	-5.63	-5.26	-2.43	-5.772	-1

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.768	-4.911	-1.828	-4.791	-4.927	-1.848	-4.938	-5.461	-2.181	-3.76	-4.02	-0.88	-2.708	-1
	6185	47	-3.810	-4.000	-0.893	-4.280	-3.924	-1.088	-4.699	-4.212	-1.438	-3.76	-4.02	-0.88	-1.773	-1
	6345	79	-4.110	-3.606	-0.840	-4.212	-3.502	-0.832	-4.060	-3.921	-0.979	-3.76	-4.02	-0.88	-1.712	-1
UNII6	6505	111	-4.496	-3.302	-0.847	-4.732	-3.718	-1.185	-5.076	-4.356	-1.690	-5.82	-5.08	-2.43	-3.277	-1
UNII7	6665	143	-3.855	-4.562	-1.183	-4.316	-4.624	-1.457	-4.561	-4.565	-1.552	-5.82	-5.08	-2.43	-3.613	-1
UNII8	6825	175	-3.478	-3.688	-0.571	-4.052	-3.879	-0.954	-4.345	-3.736	-1.019	-5.63	-5.26	-2.43	-3.001	-1
	6985	207	-3.174	-4.414	-0.739	-4.202	-4.532	-1.353	-5.037	-4.993	-2.004	-5.63	-5.26	-2.43	-3.169	-1

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.983	-4.339	-1.147	-4.178	-4.085	-1.121	-4.391	-4.926	-1.640	-3.76	-4.02	-0.88	-2.001	-1
	6185	47	-3.483	-3.845	-0.650	-3.570	-3.680	-0.614	-3.829	-3.942	-0.875	-3.76	-4.02	-0.88	-1.494	-1
	6345	79	-3.408	-3.376	-0.382	-3.549	-3.765	-0.645	-3.775	-3.609	-0.681	-3.76	-4.02	-0.88	-1.262	-1
UNII6	6505	111	-4.164	-3.855	-0.996	-4.361	-3.711	-1.013	-4.324	-3.802	-1.045	-5.82	-5.08	-2.43	-3.426	-1
UNII7	6665	143	-3.697	-4.489	-1.065	-3.887	-4.560	-1.200	-3.832	-4.106	-0.956	-5.82	-5.08	-2.43	-3.386	-1
UNII8	6825	175	-3.212	-3.840	-0.504	-3.955	-4.012	-0.973	-4.413	-4.067	-1.226	-5.63	-5.26	-2.43	-2.934	-1
	6985	207	-3.122	-4.459	-0.729	-3.702	-4.165	-0.917	-4.373	-4.685	-1.516	-5.63	-5.26	-2.43	-3.159	-1

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.888	-4.731	-1.799	-4.979	-5.021	-1.990	-5.362	-4.918	-2.124	-3.76	-4.02	-0.88	-2.679	-1
	6185	47	-4.756	-4.770	-1.753	-5.026	-4.973	-1.990	-5.115	-5.061	-2.078	-3.76	-4.02	-0.88	-2.633	-1
	6345	79	-3.782	-4.045	-0.902	-4.261	-4.107	-1.173	-3.993	-3.975	-0.974	-3.76	-4.02	-0.88	-1.782	-1
UNII6	6505	111	-3.869	-2.700	-0.235	-3.923	-3.068	-0.465	-3.818	-3.153	-0.463	-5.82	-5.08	-2.43	-2.665	-1
UNII7	6665	143	-3.184	-3.820	-0.480	-2.941	-3.358	-0.135	-3.343	-3.658	-0.488	-5.82	-5.08	-2.43	-2.565	-1
UNII8	6825	175	-2.742	-3.031	0.126	-2.887	-2.821	0.156	-3.698	-2.811	-0.222	-5.63	-5.26	-2.43	-2.274	-1
	6985	207	-2.975	-3.509	-0.224	-3.431	-3.634	-0.521	-4.080	-3.728	-0.891	-5.63	-5.26	-2.43	-2.654	-1

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.397	-3.974	-1.170	-	-	-	-4.405	-4.438	-1.411	-3.76	-4.02	-0.88	-2.050	-1
	6185	47	-3.661	-3.717	-0.679	-	-	-	-4.006	-3.901	-0.943	-3.76	-4.02	-0.88	-1.559	-1
	6345	79	-4.223	-3.508	-0.841	-	-	-	-3.750	-3.607	-0.668	-3.76	-4.02	-0.88	-1.548	-1
UNII6	6505	111	-3.609	-2.809	-0.180	-	-	-	-3.598	-2.945	-0.249	-5.82	-5.08	-2.43	-2.610	-1
UNII7	6665	143	-3.100	-3.548	-0.308	-	-	-	-2.983	-3.627	-0.283	-5.82	-5.08	-2.43	-2.713	-1
UNII8	6825	175	-2.394	-3.247	0.211	-	-	-	-2.912	-3.081	0.014	-5.63	-5.26	-2.43	-2.219	-1
	6985	207	-3.161	-3.013	-0.076	-	-	-	-3.783	-3.159	-0.450	-5.63	-5.26	-2.43	-2.506	-1

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-4.433	-4.117	-1.262	-	-	-	-3.76	-4.02	-0.88	-2.142	-1
	6185	47	-	-	-	-3.866	-4.213	-1.026	-	-	-	-3.76	-4.02	-0.88	-1.906	-1
	6345	79	-	-	-	-4.097	-3.616	-0.839	-	-	-	-3.76	-4.02	-0.88	-1.719	-1
UNII6	6505	111	-	-	-	-3.817	-2.949	-0.351	-	-	-	-5.82	-5.08	-2.43	-2.781	-1
UNII7	6665	143	-	-	-	-2.958	-3.559	-0.238	-	-	-	-5.82	-5.08	-2.43	-2.668	-1
UNII8	6825	175	-	-	-	-2.881	-3.236	-0.044	-	-	-	-5.63	-5.26	-2.43	-2.474	-1
	6985	207	-	-	-	-6.410	-6.887	-3.632	-	-	-	-5.63	-5.26	-2.43	-6.062	-1

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-5.324	-5.492	-2.397	-	-	-	-3.76	-4.02	-0.88	-3.277	-1
	6185	47	-	-	-	-5.488	-5.888	-2.673	-	-	-	-3.76	-4.02	-0.88	-3.553	-1
	6345	79	-	-	-	-5.395	-4.930	-2.146	-	-	-	-3.76	-4.02	-0.88	-3.026	-1
UNII6	6505	111	-	-	-	-5.666	-4.744	-2.170	-	-	-	-5.82	-5.08	-2.43	-4.600	-1
UNII7	6665	143	-	-	-	-5.394	-6.130	-2.736	-	-	-	-5.82	-5.08	-2.43	-5.166	-1
UNII8	6825	175	-	-	-	-4.913	-5.602	-2.233	-	-	-	-5.63	-5.26	-2.43	-4.663	-1
	6985	207	-	-	-	-6.951	-8.782	-4.760	-	-	-	-5.63	-5.26	-2.43	-7.190	-1

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-4.738	-4.816	-1.767	-	-	-	-3.76	-4.02	-0.88	-2.647	-1
	6185	47	-	-	-	-4.896	-4.971	-1.924	-	-	-	-3.76	-4.02	-0.88	-2.804	-1
	6345	79	-	-	-	-4.908	-4.412	-1.643	-	-	-	-3.76	-4.02	-0.88	-2.523	-1
UNII6	6505	111	-	-	-	-5.336	-4.821	-2.061	-	-	-	-5.82	-5.08	-2.43	-4.491	-1
UNII7	6665	143	-	-	-	-4.719	-5.466	-2.067	-	-	-	-5.82	-5.08	-2.43	-4.497	-1
UNII8	6825	175	-	-	-	-4.258	-5.117	-1.656	-	-	-	-5.63	-5.26	-2.43	-4.086	-1
	6985	207	-	-	-	-6.678	-8.349	-4.424	-	-	-	-5.63	-5.26	-2.43	-6.854	-1

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.644	-5.288	-2.452	-6.152	-5.169	-2.622	-6.219	-3.862	-1.872	-3.76	-4.02	-0.88	-2.752	-1
	6265	63	-5.761	-5.053	-2.382	-5.823	-4.824	-2.284	-6.046	-4.130	-1.973	-3.76	-4.02	-0.88	-2.853	-1
UNII6	6425	95	-7.743	-3.964	-2.444	-7.720	-3.597	-2.176	-7.138	-3.260	-1.769	-5.82	-5.08	-2.43	-4.199	-1
	6585	127	-8.140	-3.622	-2.308	-7.852	-3.923	-2.447	-7.179	-4.130	-2.382	-5.82	-5.08	-2.43	-4.738	-1
UNII8	6745	159	-7.715	-4.256	-2.639	-7.638	-4.029	-2.458	-7.421	-3.820	-2.247	-5.63	-5.26	-2.43	-4.677	-1
	6905	191	-7.801	-4.411	-2.773	-7.616	-3.849	-2.326	-7.657	-3.646	-2.194	-5.63	-5.26	-2.43	-4.624	-1

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.835	-4.598	-1.189	-4.034	-4.444	-1.224	-4.080	-4.470	-1.260	-3.76	-4.02	-0.88	-2.069	-1
	6265	63	-3.823	-4.130	-0.963	-4.139	-3.906	-1.011	-4.319	-3.875	-1.081	-3.76	-4.02	-0.88	-1.843	-1
UNII6	6425	95	-4.237	-2.850	-0.478	-4.514	-2.995	-0.678	-4.474	-3.029	-0.681	-5.82	-5.08	-2.43	-2.908	-1
	6585	127	-4.203	-4.112	-1.147	-4.049	-4.095	-1.062	-4.361	-3.393	-0.840	-5.82	-5.08	-2.43	-3.270	-1
UNII8	6745	159	-3.717	-5.160	-1.368	-3.770	-4.571	-1.142	-3.952	-4.429	-1.174	-5.63	-5.26	-2.43	-3.572	-1
	6905	191	-3.178	-4.608	-0.824	-3.140	-5.008	-0.964	-3.542	-4.596	-1.027	-5.63	-5.26	-2.43	-3.254	-1

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.001	-4.099	-1.040	-4.143	-4.415	-1.267	-3.605	-4.401	-0.975	-3.76	-4.02	-0.88	-1.855	-1
	6265	63	-3.107	-4.483	-0.731	-3.627	-3.739	-0.673	-3.487	-3.952	-0.703	-3.76	-4.02	-0.88	-1.553	-1
UNII6	6425	95	-4.190	-3.250	-0.684	-3.988	-3.446	-0.698	-3.778	-3.324	-0.535	-5.82	-5.08	-2.43	-2.965	-1
	6585	127	-3.925	-3.799	-0.851	-3.815	-4.030	-0.911	-3.550	-4.172	-0.840	-5.82	-5.08	-2.43	-3.270	-1
UNII8	6745	159	-3.594	-5.212	-1.318	-3.576	-4.496	-1.002	-3.451	-4.644	-0.997	-5.63	-5.26	-2.43	-3.427	-1
	6905	191	-3.312	-5.769	-1.359	-3.351	-5.470	-1.272	-3.254	-5.032	-1.043	-5.63	-5.26	-2.43	-3.473	-1

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.413	-3.938	-0.658	-3.440	-4.100	-0.748	-3.779	-4.239	-0.993	-3.76	-4.02	-0.88	-1.538	-1
	6265	63	-3.146	-3.685	-0.397	-3.576	-3.891	-0.721	-3.773	-4.095	-0.921	-3.76	-4.02	-0.88	-1.277	-1
UNII6	6425	95	-3.976	-2.477	-0.152	-4.382	-2.575	-0.375	-4.068	-2.396	-0.142	-5.82	-5.08	-2.43	-2.572	-1
	6585	127	-3.350	-2.863	-0.090	-3.402	-3.045	-0.210	-2.929	-2.616	0.240	-5.82	-5.08	-2.43	-2.190	-1
UNII8	6745	159	-2.617	-4.252	-0.348	-2.972	-3.908	-0.405	-2.592	-3.681	-0.093	-5.63	-5.26	-2.43	-2.523	-1
	6905	191	-2.429	-4.737	-0.422	-2.510	-4.472	-0.371	-2.785	-4.573	-0.578	-5.63	-5.26	-2.43	-2.801	-1

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.317	-3.364	-0.330	-	-	-	-3.601	-3.796	-0.687	-3.76	-4.02	-0.88	-1.210	-1
	6265	63	-3.480	-3.517	-0.488	-	-	-	-3.799	-3.888	-0.833	-3.76	-4.02	-0.88	-1.368	-1
UNII6	6425	95	-3.133	-2.361	0.280	-	-	-	-3.061	-2.287	0.353	-5.82	-5.08	-2.43	-2.077	-1
	6585	127	-3.147	-2.957	-0.041	-	-	-	-2.858	-2.997	0.083	-5.82	-5.08	-2.43	-2.347	-1
UNII8	6745	159	-2.710	-3.814	-0.217	-	-	-	-2.485	-3.658	-0.022	-5.63	-5.26	-2.43	-2.452	-1
	6905	191	-2.449	-3.967	-0.132	-	-	-	-2.654	-4.080	-0.299	-5.63	-5.26	-2.43	-2.562	-1

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.345	-3.700	-0.508	-	-	-	-3.76	-4.02	-0.88	-1.388	-1
	6265	63	-	-	-	-3.207	-3.802	-0.484	-	-	-	-3.76	-4.02	-0.88	-1.364	-1
UNII6	6425	95	-	-	-	-3.273	-2.369	0.213	-	-	-	-5.82	-5.08	-2.43	-2.217	-1
	6585	127	-	-	-	-2.749	-2.959	0.158	-	-	-	-5.82	-5.08	-2.43	-2.272	-1
UNII8	6745	159	-	-	-	-2.591	-3.406	0.031	-	-	-	-5.63	-5.26	-2.43	-2.399	-1
	6905	191	-	-	-	-5.571	-7.172	-3.288	-	-	-	-5.63	-5.26	-2.43	-5.718	-1

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.587	-5.976	-3.697	-6.951	-4.994	-2.853	-6.798	-4.409	-2.431	-3.76	-4.02	-0.88	-3.311	-1
	6265	63	-8.226	-6.155	-4.058	-7.457	-5.646	-3.447	-7.505	-4.321	-2.617	-3.76	-4.02	-0.88	-3.497	-1
UNII6	6425	95	-8.862	-5.487	-3.844	-8.364	-5.262	-3.531	-7.357	-4.834	-2.904	-5.82	-5.08	-2.43	-5.334	-1
	6585	127	-8.979	-6.348	-4.457	-7.945	-4.950	-3.184	-7.385	-5.031	-3.040	-5.82	-5.08	-2.43	-5.470	-1
UNII8	6745	159	-9.280	-5.909	-4.265	-7.698	-5.001	-3.133	-7.933	-3.759	-2.352	-5.63	-5.26	-2.43	-4.782	-1
	6905	191	-9.543	-6.333	-4.637	-9.310	-5.140	-3.732	-9.365	-4.727	-3.444	-5.63	-5.26	-2.43	-5.874	-1

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.708	-4.528	-1.088	-3.908	-4.663	-1.259	-3.841	-4.924	-1.338	-3.76	-4.02	-0.88	-1.968	-1
	6265	63	-4.625	-4.465	-1.534	-4.673	-4.104	-1.369	-4.555	-4.749	-1.641	-3.76	-4.02	-0.88	-2.249	-1
UNII6	6425	95	-4.207	-3.796	-0.986	-4.273	-3.490	-0.853	-4.388	-3.618	-0.976	-5.82	-5.08	-2.43	-3.283	-1
	6585	127	-4.165	-4.640	-1.386	-4.327	-4.627	-1.464	-4.134	-4.226	-1.169	-5.82	-5.08	-2.43	-3.599	-1
UNII8	6745	159	-3.827	-5.221	-1.458	-3.989	-5.306	-1.587	-3.978	-4.650	-1.291	-5.63	-5.26	-2.43	-3.721	-1
	6905	191	-3.661	-5.050	-1.290	-4.003	-4.455	-1.213	-4.048	-4.491	-1.253	-5.63	-5.26	-2.43	-3.643	-1

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.780	-4.252	-0.999	-3.959	-3.870	-0.904	-4.009	-4.064	-1.026	-3.76	-4.02	-0.88	-1.784	-1
	6265	63	-3.780	-4.333	-1.038	-4.132	-3.959	-1.035	-3.803	-4.206	-0.990	-3.76	-4.02	-0.88	-1.870	-1
UNII6	6425	95	-4.141	-3.639	-0.873	-4.109	-3.734	-0.907	-3.904	-3.425	-0.648	-5.82	-5.08	-2.43	-3.078	-1
	6585	127	-3.937	-4.275	-1.093	-3.651	-3.988	-0.806	-3.837	-4.253	-1.030	-5.82	-5.08	-2.43	-3.236	-1
UNII8	6745	159	-3.571	-4.748	-1.110	-3.780	-4.783	-1.242	-3.777	-4.298	-1.020	-5.63	-5.26	-2.43	-3.450	-1
	6905	191	-3.078	-5.225	-1.010	-3.430	-5.086	-1.169	-3.624	-4.554	-1.054	-5.63	-5.26	-2.43	-3.440	-1

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.427	-3.811	-0.605	-3.409	-4.112	-0.736	-3.568	-4.199	-0.862	-3.76	-4.02	-0.88	-1.485	-1
	6265	63	-3.481	-3.782	-0.619	-3.584	-3.781	-0.672	-3.592	-3.751	-0.661	-3.76	-4.02	-0.88	-1.499	-1
UNII6	6425	95	-3.406	-2.265	0.212	-3.463	-2.306	0.164	-3.236	-2.518	0.148	-5.82	-5.08	-2.43	-2.218	-1
	6585	127	-3.156	-3.246	-0.191	-3.029	-3.273	-0.139	-3.072	-3.076	-0.064	-5.82	-5.08	-2.43	-2.494	-1
UNII8	6745	159	-2.743	-3.424	-0.060	-2.771	-3.750	-0.223	-3.051	-3.163	-0.097	-5.63	-5.26	-2.43	-2.490	-1
	6905	191	-2.504	-4.040	-0.195	-2.344	-3.489	0.131	-3.047	-3.648	-0.327	-5.63	-5.26	-2.43	-2.299	-1

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.236	-3.859	-0.526	-	-	-	-3.117	-3.911	-0.486	-3.76	-4.02	-0.88	-1.366	-1
	6265	63	-3.367	-3.422	-0.384	-	-	-	-3.819	-3.493	-0.643	-3.76	-4.02	-0.88	-1.264	-1
UNII6	6425	95	-3.452	-2.081	0.298	-	-	-	-3.154	-2.152	0.386	-5.82	-5.08	-2.43	-2.044	-1
	6585	127	-3.002	-2.942	0.038	-	-	-	-2.767	-3.263	0.002	-5.82	-5.08	-2.43	-2.392	-1
UNII8	6745	159	-2.562	-3.478	0.014	-	-	-	-2.565	-3.229	0.126	-5.63	-5.26	-2.43	-2.304	-1
	6905	191	-2.241	-3.238	0.299	-	-	-	-2.839	-3.177	0.005	-5.63	-5.26	-2.43	-2.131	-1

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.439	-3.681	-0.548	-	-	-	-3.76	-4.02	-0.88	-1.428	-1
	6265	63	-	-	-	-3.448	-3.383	-0.405	-	-	-	-3.76	-4.02	-0.88	-1.285	-1
UNII6	6425	95	-	-	-	-2.987	-2.349	0.354	-	-	-	-5.82	-5.08	-2.43	-2.076	-1
	6585	127	-	-	-	-2.728	-2.728	0.282	-	-	-	-5.82	-5.08	-2.43	-2.148	-1
UNII8	6745	159	-	-	-	-2.721	-3.096	0.106	-	-	-	-5.63	-5.26	-2.43	-2.324	-1
	6905	191	-	-	-	-5.877	-6.019	-2.937	-	-	-	-5.63	-5.26	-2.43	-5.367	-1

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-6.869	-4.172	-2.304	-8.127	-4.961	-3.251	-9.607	-6.475	-4.754	-3.76	-4.02	-0.88	-3.184	-1
	6265	63	-7.929	-4.444	-2.835	-8.027	-5.085	-3.301	-9.459	-6.312	-4.596	-3.76	-4.02	-0.88	-3.715	-1
UNII6	6425	95	-7.126	-4.817	-2.809	-7.922	-6.090	-3.900	-8.717	-7.072	-4.807	-5.82	-5.08	-2.43	-5.239	-1
	6585	127	-7.404	-5.562	-3.376	-7.914	-6.107	-3.907	-8.422	-6.177	-4.146	-5.82	-5.08	-2.43	-5.806	-1
UNII8	6745	159	-7.914	-4.306	-2.735	-9.013	-4.709	-3.338	-10.097	-5.742	-4.385	-5.63	-5.26	-2.43	-5.165	-1
	6905	191	-9.430	-4.579	-3.349	-10.789	-5.544	-4.408	-12.139	-6.761	-5.655	-5.63	-5.26	-2.43	-5.779	-1

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.161	-4.110	-1.125	-4.016	-4.334	-1.162	-4.461	-4.761	-1.598	-3.76	-4.02	-0.88	-2.005	-1
	6265	63	-4.167	-3.814	-0.977	-4.305	-3.698	-0.981	-4.443	-3.944	-1.176	-3.76	-4.02	-0.88	-1.857	-1
UNII6	6425	95	-4.309	-3.815	-1.045	-4.503	-3.782	-1.117	-5.138	-4.249	-1.660	-5.82	-5.08	-2.43	-3.475	-1
	6585	127	-4.445	-4.391	-1.408	-4.099	-3.983	-1.030	-4.021	-3.969	-0.985	-5.82	-5.08	-2.43	-3.415	-1
UNII8	6745	159	-3.893	-4.263	-1.064	-3.877	-4.504	-1.169	-4.681	-4.685	-1.673	-5.63	-5.26	-2.43	-3.494	-1
	6905	191	-3.884	-4.186	-1.022	-4.063	-4.237	-1.139	-5.369	-4.595	-1.954	-5.63	-5.26	-2.43	-3.452	-1

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.168	-3.811	-0.467	-3.373	-3.861	-0.600	-3.858	-4.095	-0.965	-3.76	-4.02	-0.88	-1.347	-1
	6265	63	-3.608	-4.016	-0.797	-3.521	-3.718	-0.608	-3.806	-4.120	-0.950	-3.76	-4.02	-0.88	-1.488	-1
UNII6	6425	95	-3.239	-3.094	-0.156	-4.044	-3.701	-0.859	-4.162	-4.003	-1.072	-5.82	-5.08	-2.43	-2.586	-1
	6585	127	-3.650	-3.830	-0.729	-3.735	-4.229	-0.965	-4.129	-4.023	-1.066	-5.82	-5.08	-2.43	-3.159	-1
UNII8	6745	159	-3.784	-4.283	-1.016	-3.829	-4.213	-1.007	-3.983	-4.311	-1.134	-5.63	-5.26	-2.43	-3.437	-1
	6905	191	-2.983	-4.113	-0.501	-3.867	-4.206	-1.023	-4.476	-4.563	-1.509	-5.63	-5.26	-2.43	-2.931	-1

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.863	-4.127	-0.983	-3.941	-4.087	-1.004	-4.202	-3.908	-1.043	-3.76	-4.02	-0.88	-1.863	-1
	6265	63	-3.851	-3.810	-0.821	-4.080	-3.494	-0.767	-4.074	-3.861	-0.956	-3.76	-4.02	-0.88	-1.647	-1
UNII6	6425	95	-3.398	-2.446	0.114	-3.393	-2.253	0.224	-3.497	-2.766	-0.106	-5.82	-5.08	-2.43	-2.206	-1
	6585	127	-2.960	-3.269	-0.102	-3.219	-3.255	-0.227	-3.176	-3.160	-0.158	-5.82	-5.08	-2.43	-2.532	-1
UNII8	6745	159	-3.159	-3.258	-0.198	-3.012	-3.270	-0.129	-3.328	-3.323	-0.316	-5.63	-5.26	-2.43	-2.559	-1
	6905	191	-2.808	-3.305	-0.040	-3.082	-3.532	-0.291	-3.742	-3.708	-0.715	-5.63	-5.26	-2.43	-2.470	-1

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.436	-4.159	-0.772	-	-	-	-3.613	-3.898	-0.743	-3.76	-4.02	-0.88	-1.623	-1
	6265	63	-3.817	-3.413	-0.600	-	-	-	-3.938	-3.727	-0.821	-3.76	-4.02	-0.88	-1.480	-1
UNII6	6425	95	-3.022	-2.196	0.421	-	-	-	-3.112	-2.385	0.277	-5.82	-5.08	-2.43	-2.009	-1
	6585	127	-2.685	-3.573	-0.096	-	-	-	-2.431	-3.059	0.276	-5.82	-5.08	-2.43	-2.154	-1
UNII8	6745	159	-2.793	-3.473	-0.110	-	-	-	-2.762	-2.958	0.151	-5.63	-5.26	-2.43	-2.279	-1
	6905	191	-2.129	-2.722	0.595	-	-	-	-3.035	-2.711	0.140	-5.63	-5.26	-2.43	-1.835	-1

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-3.612	-3.590	-0.591	-	-	-	-3.76	-4.02	-0.88	-1.471	-1
	6265	63	-	-	-	-3.818	-3.780	-0.789	-	-	-	-3.76	-4.02	-0.88	-1.669	-1
UNII6	6425	95	-	-	-	-2.975	-2.090	0.500	-	-	-	-5.82	-5.08	-2.43	-1.930	-1
	6585	127	-	-	-	-2.905	-3.085	0.016	-	-	-	-5.82	-5.08	-2.43	-2.414	-1
UNII8	6745	159	-	-	-	-2.476	-3.177	0.198	-	-	-	-5.63	-5.26	-2.43	-2.232	-1
	6905	191	-	-	-	-5.191	-5.296	-2.233	-	-	-	-5.63	-5.26	-2.43	-4.663	-1

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]	
UNII5	6105	31	-7.336	-3.694	-2.133	-8.242	-4.300	-2.828	-7.996	-4.403	-2.828	-3.76	-4.02	-0.88	-3.013	-1
	6265	63	-6.543	-4.743	-2.540	-6.965	-5.172	-2.966	-6.891	-5.359	-3.047	-3.76	-4.02	-0.88	-3.420	-1
UNII6	6425	95	-6.647	-5.101	-2.795	-6.494	-5.645	-3.038	-6.584	-6.371	-3.466	-5.82	-5.08	-2.43	-5.225	-1
	6585	127	-6.288	-4.391	-2.226	-6.829	-5.150	-2.898	-6.570	-4.820	-2.597	-5.82	-5.08	-2.43	-4.656	-1
UNII8	6745	159	-8.062	-3.924	-2.507	-8.637	-4.274	-2.919	-9.253	-4.917	-3.554	-5.63	-5.26	-2.43	-4.937	-1
	6905	191	-10.112	-4.860	-3.726	-10.784	-5.931	-4.702	-11.492	-6.120	-5.013	-5.63	-5.26	-2.43	-6.156	-1

Mode : EHT320(80HH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]
UNII5	6105	31	-4.643	-4.506	-1.564	-4.820	-4.348	-1.567	-4.940	-4.883	-1.901	-3.76	-4.02	-0.88	-2.444	-1
	6265	63	-4.327	-4.258	-1.282	-4.343	-4.053	-1.185	-4.493	-4.241	-1.355	-3.76	-4.02	-0.88	-2.065	-1
UNII6	6425	95	-4.643	-4.111	-1.358	-4.397	-4.309	-1.342	-4.628	-4.236	-1.417	-5.82	-5.08	-2.43	-3.772	-1
	6585	127	-4.246	-4.181	-1.203	-4.259	-4.174	-1.206	-4.557	-3.894	-1.202	-5.82	-5.08	-2.43	-3.632	-1
UNII8	6745	159	-4.363	-4.328	-1.335	-5.031	-4.039	-1.496	-5.325	-3.909	-1.549	-5.63	-5.26	-2.43	-3.765	-1
	6905	191	-3.958	-3.774	-0.855	-4.949	-3.830	-1.343	-6.029	-4.185	-1.999	-5.63	-5.26	-2.43	-3.285	-1

Mode : EHT320(80HH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-3.890	-4.045	-0.957	-4.099	-4.249	-1.163	-4.012	-4.325	-1.156	-3.76	-4.02	-0.88	-1.837	-1
	6265	63	-3.520	-4.097	-0.789	-3.766	-4.160	-0.948	-3.964	-4.463	-1.196	-3.76	-4.02	-0.88	-1.669	-1
UNII6	6425	95	-3.946	-3.857	-0.891	-3.991	-4.037	-1.004	-3.945	-4.309	-1.113	-5.82	-5.08	-2.43	-3.321	-1
	6585	127	-3.825	-4.067	-0.934	-3.732	-4.087	-0.896	-3.840	-3.888	-0.854	-5.82	-5.08	-2.43	-3.284	-1
UNII8	6745	159	-4.402	-4.283	-1.332	-4.533	-4.217	-1.362	-4.996	-4.014	-1.467	-5.63	-5.26	-2.43	-3.762	-1
	6905	191	-3.988	-3.982	-0.975	-4.989	-3.856	-1.376	-5.317	-4.265	-1.749	-5.63	-5.26	-2.43	-3.405	-1

Mode : EHT320(80HH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-3.768	-4.119	-0.930	-3.832	-4.303	-1.051	-3.957	-3.919	-0.928	-3.76	-4.02	-0.88	-1.808	-1
	6265	63	-3.784	-3.647	-0.705	-3.716	-4.021	-0.856	-3.589	-3.869	-0.717	-3.76	-4.02	-0.88	-1.585	-1
UNII6	6425	95	-3.362	-2.848	-0.088	-3.458	-2.988	-0.207	-3.393	-3.187	-0.279	-5.82	-5.08	-2.43	-2.518	-1
	6585	127	-3.016	-2.937	0.034	-2.934	-3.067	0.010	-2.988	-2.773	0.131	-5.82	-5.08	-2.43	-2.299	-1
UNII8	6745	159	-3.321	-3.065	-0.181	-3.696	-3.139	-0.399	-4.177	-3.041	-0.562	-5.63	-5.26	-2.43	-2.611	-1
	6905	191	-3.621	-2.881	-0.225	-4.274	-2.962	-0.559	-4.554	-3.014	-0.706	-5.63	-5.26	-2.43	-2.655	-1

Mode : EHT320(80HH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.360	-4.119	-1.228	-	-	-	-4.336	-4.313	-1.314	-3.76	-4.02	-0.88	-2.108	-1
	6265	63	-3.868	-3.916	-0.882	-	-	-	-4.016	-3.975	-0.985	-3.76	-4.02	-0.88	-1.762	-1
UNII6	6425	95	-3.238	-3.236	-0.227	-	-	-	-3.243	-3.298	-0.260	-5.82	-5.08	-2.43	-2.657	-1
	6585	127	-2.787	-3.309	-0.030	-	-	-	-2.804	-3.409	-0.086	-5.82	-5.08	-2.43	-2.460	-1
UNII8	6745	159	-3.379	-3.327	-0.343	-	-	-	-3.786	-2.985	-0.357	-5.63	-5.26	-2.43	-2.773	-1
	6905	191	-3.860	-3.036	-0.418	-	-	-	-4.340	-3.350	-0.807	-5.63	-5.26	-2.43	-2.848	-1

Mode : EHT320(80HH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.755	-4.145	-0.935	-	-	-	-3.76	-4.02	-0.88	-1.815	-1
	6265	63	-	-	-	-3.769	-3.743	-0.746	-	-	-	-3.76	-4.02	-0.88	-1.626	-1
UNII6	6425	95	-	-	-	-3.257	-2.940	-0.085	-	-	-	-5.82	-5.08	-2.43	-2.515	-1
	6585	127	-	-	-	-2.949	-3.429	-0.172	-	-	-	-5.82	-5.08	-2.43	-2.602	-1
UNII8	6745	159	-	-	-	-3.486	-3.185	-0.322	-	-	-	-5.63	-5.26	-2.43	-2.752	-1
	6905	191	-	-	-	-6.694	-5.528	-3.062	-	-	-	-5.63	-5.26	-2.43	-5.492	-1

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-4.433	-5.000	-1.697	-	-	-	-3.76	-4.02	-0.88	-2.577	-1
	6265	63	-	-	-	-4.604	-4.489	-1.536	-	-	-	-3.76	-4.02	-0.88	-2.416	-1
UNII6	6425	95	-	-	-	-4.291	-3.832	-1.045	-	-	-	-5.82	-5.08	-2.43	-3.475	-1
	6585	127	-	-	-	-4.369	-4.541	-1.444	-	-	-	-5.82	-5.08	-2.43	-3.874	-1
UNII8	6745	159	-	-	-	-4.409	-4.565	-1.476	-	-	-	-5.63	-5.26	-2.43	-3.906	-1
	6905	191	-	-	-	-6.974	-7.236	-4.093	-	-	-	-5.63	-5.26	-2.43	-6.523	-1

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.775	-4.077	-0.913	-	-	-	-3.76	-4.02	-0.88	-1.793	-1
	6265	63	-	-	-	-4.190	-3.759	-0.959	-	-	-	-3.76	-4.02	-0.88	-1.839	-1
UNII6	6425	95	-	-	-	-3.760	-3.679	-0.709	-	-	-	-5.82	-5.08	-2.43	-3.139	-1
	6585	127	-	-	-	-3.892	-4.504	-1.177	-	-	-	-5.82	-5.08	-2.43	-3.607	-1
UNII8	6745	159	-	-	-	-3.910	-4.731	-1.291	-	-	-	-5.63	-5.26	-2.43	-3.721	-1
	6905	191	-	-	-	-6.309	-6.768	-3.522	-	-	-	-5.63	-5.26	-2.43	-5.952	-1

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-6.832	-7.202	-4.003	-	-	-	-3.76	-4.02	-0.88	-4.883	-1
	6265	63	-	-	-	-7.203	-6.520	-3.838	-	-	-	-3.76	-4.02	-0.88	-4.718	-1
UNII6	6425	95	-	-	-	-7.204	-6.712	-3.941	-	-	-	-5.82	-5.08	-2.43	-6.371	-1
	6585	127	-	-	-	-7.164	-7.592	-4.363	-	-	-	-5.82	-5.08	-2.43	-6.793	-1
UNII8	6745	159	-	-	-	-7.274	-7.550	-4.400	-	-	-	-5.63	-5.26	-2.43	-6.830	-1
	6905	191	-	-	-	-9.578	-10.216	-6.875	-	-	-	-5.63	-5.26	-2.43	-9.305	-1

Mode : EHT320 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.PSD [dBm/MHz]	Limit [dBm/MHz]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	-6.745	-7.085	-3.902	-	-	-	-3.76	-4.02	-0.88	-4.782	-1
	6265	63	-	-	-	-7.195	-6.869	-4.019	-	-	-	-3.76	-4.02	-0.88	-4.899	-1
UNII6	6425	95	-	-	-	-6.734	-6.276	-3.489	-	-	-	-5.82	-5.08	-2.43	-5.919	-1
	6585	127	-	-	-	-6.655	-6.983	-3.806	-	-	-	-5.82	-5.08	-2.43	-6.236	-1
UNII8	6745	159	-	-	-	-6.480	-7.075	-3.757	-	-	-	-5.63	-5.26	-2.43	-6.187	-1
	6905	191	-	-	-	-8.605	-9.112	-5.841	-	-	-	-5.63	-5.26	-2.43	-8.271	-1

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	-4.002	-4.117	-1.048	-	-	-	-3.76	-4.02	-0.88	-1.928	-1
	6175	45	-	-	-	-3.126	-3.222	-0.163	-	-	-	-3.76	-4.02	-0.88	-1.043	-1
	6415	93	-	-	-	-4.317	-2.799	-0.481	-	-	-	-3.76	-4.02	-0.88	-1.361	-1
UNII6	6435	97	-	-	-	-3.144	-2.063	0.441	-	-	-	-5.82	-5.08	-2.43	-1.989	-1
	6475	105	-	-	-	-3.328	-2.076	0.354	-	-	-	-5.82	-5.08	-2.43	-2.076	-1
	6515	113	-	-	-	-3.431	-2.274	0.197	-	-	-	-5.82	-5.08	-2.43	-2.233	-1
UNII7	6535	117	-	-	-	-3.015	-2.474	0.275	-	-	-	-5.82	-5.08	-2.43	-2.155	-1
	6695	149	-	-	-	-2.631	-3.052	0.174	-	-	-	-5.82	-5.08	-2.43	-2.256	-1
	6855	181	-	-	-	-2.126	-2.250	0.823	-	-	-	-5.82	-5.08	-2.43	-1.607	-1
UNII8	6875	185	-	-	-	-2.262	-2.509	0.627	-	-	-	-5.63	-5.26	-2.43	-1.803	-1
	6995	209	-	-	-	-1.569	-2.213	1.132	-	-	-	-5.63	-5.26	-2.43	-1.298	-1
	7115	233	-	-	-	-6.897	-7.457	-4.157	-	-	-	-5.63	-5.26	-2.43	-6.587	-1

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-4.961	-5.566	-2.243	-4.996	-5.405	-2.185	-5.059	-5.551	-2.288	-3.76	-4.02	-0.88	-3.065	-1
	6175	45	-5.062	-5.329	-2.183	-4.920	-5.247	-2.070	-5.050	-5.580	-2.297	-3.76	-4.02	-0.88	-2.950	-1
	6415	93	-5.799	-4.566	-2.129	-6.006	-4.520	-2.189	-5.676	-4.667	-2.132	-3.76	-4.02	-0.88	-3.009	-1
UNII6	6435	97	-5.052	-4.483	-1.748	-5.314	-4.515	-1.886	-5.328	-4.640	-1.960	-5.82	-5.08	-2.43	-4.178	-1
	6475	105	-5.551	-4.754	-2.124	-5.540	-4.695	-2.087	-5.333	-4.624	-1.954	-5.82	-5.08	-2.43	-4.384	-1
	6515	113	-5.585	-4.832	-2.182	-5.485	-4.695	-2.062	-5.691	-4.901	-2.268	-5.82	-5.08	-2.43	-4.492	-1
UNII7	6535	117	-5.019	-4.855	-1.926	-5.169	-5.060	-2.104	-5.420	-4.814	-2.096	-5.82	-5.08	-2.43	-4.356	-1
	6695	149	-4.720	-5.389	-2.031	-4.770	-5.522	-2.119	-4.407	-5.270	-1.807	-5.82	-5.08	-2.43	-4.237	-1
	6855	181	-4.124	-4.860	-1.466	-4.138	-4.621	-1.363	-4.430	-4.539	-1.474	-5.82	-5.08	-2.43	-3.793	-1
UNII8	6875	185	-4.717	-5.242	-1.961	-4.882	-5.168	-2.012	-4.860	-4.971	-1.905	-5.63	-5.26	-2.43	-4.335	-1
	6995	209	-4.066	-5.769	-1.824	-4.494	-6.139	-2.229	-4.903	-5.804	-2.320	-5.63	-5.26	-2.43	-4.254	-1
	7115	233	-4.723	-5.988	-2.299	-4.912	-5.899	-2.367	-4.874	-5.849	-2.324	-5.63	-5.26	-2.43	-4.729	-1

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-4.131	-4.553	-1.326	-	-	-	-4.199	-4.469	-1.321	-3.76	-4.02	-0.88	-2.201	-1
	6175	45	-3.578	-4.350	-0.936	-	-	-	-3.694	-4.423	-1.033	-3.76	-4.02	-0.88	-1.816	-1
	6415	93	-4.503	-4.241	-1.359	-	-	-	-4.583	-4.136	-1.343	-3.76	-4.02	-0.88	-2.223	-1
UNII6	6435	97	-4.030	-3.636	-0.818	-	-	-	-4.058	-3.838	-0.936	-5.82	-5.08	-2.43	-3.248	-1
	6475	105	-4.311	-3.914	-1.097	-	-	-	-4.096	-3.811	-0.941	-5.82	-5.08	-2.43	-3.371	-1
	6515	113	-4.233	-3.677	-0.935	-	-	-	-4.436	-3.893	-1.145	-5.82	-5.08	-2.43	-3.365	-1
UNII7	6535	117	-4.075	-4.072	-1.063	-	-	-	-4.277	-4.347	-1.301	-5.82	-5.08	-2.43	-3.493	-1
	6695	149	-3.638	-4.424	-1.003	-	-	-	-3.878	-4.570	-1.200	-5.82	-5.08	-2.43	-3.433	-1
	6855	181	-3.057	-4.444	-0.685	-	-	-	-3.546	-4.236	-0.867	-5.82	-5.08	-2.43	-3.115	-1
UNII8	6875	185	-3.209	-4.529	-0.808	-	-	-	-3.705	-4.326	-0.994	-5.63	-5.26	-2.43	-3.238	-1
	6995	209	-3.131	-4.834	-0.889	-	-	-	-3.364	-5.176	-1.166	-5.63	-5.26	-2.43	-3.319	-1
	7115	233	-3.765	-5.085	-1.364	-	-	-	-3.933	-4.911	-1.384	-5.63	-5.26	-2.43	-3.794	-1

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-5.127	-5.662	-2.376	-5.321	-5.798	-2.543	-5.388	-5.788	-2.573	-3.76	-4.02	-0.88	-3.256	-1
	6165	43	-5.017	-5.787	-2.375	-4.945	-5.793	-2.338	-5.334	-5.816	-2.558	-3.76	-4.02	-0.88	-3.218	-1
	6405	91	-5.718	-4.774	-2.210	-5.784	-5.170	-2.456	-5.475	-4.660	-2.038	-3.76	-4.02	-0.88	-2.918	-1
UNII6	6445	99	-5.271	-4.681	-1.956	-5.554	-4.787	-2.143	-5.296	-4.692	-1.973	-5.82	-5.08	-2.43	-4.386	-1
	6485	107	-5.625	-4.432	-1.978	-5.893	-4.617	-2.198	-5.597	-4.511	-2.010	-5.82	-5.08	-2.43	-4.408	-1
	6525	115	-5.444	-4.898	-2.152	-5.414	-5.007	-2.196	-5.679	-4.910	-2.267	-5.82	-5.08	-2.43	-4.582	-1
UNII7	6565	123	-4.865	-5.027	-1.935	-5.105	-5.398	-2.239	-5.148	-5.272	-2.199	-5.82	-5.08	-2.43	-4.365	-1
	6685	147	-5.110	-5.056	-2.073	-5.107	-5.382	-2.232	-5.075	-5.220	-2.137	-5.82	-5.08	-2.43	-4.503	-1
	6845	179	-4.313	-4.541	-1.415	-4.456	-4.798	-1.614	-4.312	-4.586	-1.437	-5.82	-5.08	-2.43	-3.845	-1
UNII8	6885	187	-4.698	-5.100	-1.884	-4.774	-5.222	-1.982	-4.680	-5.226	-1.934	-5.63	-5.26	-2.43	-4.314	-1
	7005	211	-4.551	-5.807	-2.124	-4.851	-5.765	-2.274	-4.691	-5.651	-2.134	-5.63	-5.26	-2.43	-4.554	-1
	7085	227	-4.315	-6.055	-2.088	-5.009	-6.138	-2.527	-5.013	-6.001	-2.469	-5.63	-5.26	-2.43	-4.518	-1

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-4.022	-4.668	-1.323	-4.199	-4.990	-1.566	-3.719	-4.875	-1.249	-3.76	-4.02	-0.88	-2.129	-1
	6165	43	-3.943	-4.478	-1.192	-3.958	-4.746	-1.324	-4.254	-4.836	-1.525	-3.76	-4.02	-0.88	-2.072	-1
	6405	91	-4.573	-4.174	-1.359	-4.849	-4.019	-1.404	-4.602	-4.213	-1.393	-3.76	-4.02	-0.88	-2.239	-1
UNII6	6445	99	-4.191	-3.889	-1.027	-4.363	-3.903	-1.117	-4.148	-3.983	-1.055	-5.82	-5.08	-2.43	-3.457	-1
	6485	107	-4.375	-3.732	-1.032	-4.649	-3.858	-1.225	-4.307	-3.991	-1.136	-5.82	-5.08	-2.43	-3.462	-1
	6525	115	-4.145	-4.026	-1.075	-4.300	-4.086	-1.182	-4.303	-4.216	-1.249	-5.82	-5.08	-2.43	-3.505	-1
UNII7	6565	123	-3.819	-4.350	-1.066	-4.125	-4.567	-1.330	-3.965	-4.557	-1.241	-5.82	-5.08	-2.43	-3.496	-1
	6685	147	-3.868	-4.295	-1.066	-4.062	-4.352	-1.194	-4.017	-4.327	-1.159	-5.82	-5.08	-2.43	-3.496	-1
	6845	179	-3.252	-4.132	-0.660	-3.569	-4.412	-0.960	-3.392	-3.866	-0.612	-5.82	-5.08	-2.43	-3.042	-1
UNII8	6885	187	-3.239	-4.480	-0.805	-3.352	-4.796	-1.004	-3.781	-4.499	-1.115	-5.63	-5.26	-2.43	-3.235	-1
	7005	211	-3.224	-4.558	-0.830	-3.704	-4.753	-1.187	-3.690	-4.608	-1.115	-5.63	-5.26	-2.43	-3.260	-1
	7085	227	-3.362	-4.414	-0.846	-3.742	-4.502	-1.095	-4.032	-4.347	-1.177	-5.63	-5.26	-2.43	-3.276	-1

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-5.310	-5.682	-2.481	-5.251	-5.862	-2.535	-5.251	-5.975	-2.587	-3.76	-4.02	-0.88	-3.361	-1
	6145	39	-5.189	-5.523	-2.342	-5.025	-5.351	-2.174	-5.370	-5.844	-2.590	-3.76	-4.02	-0.88	-3.054	-1
	6385	87	-6.121	-5.500	-2.789	-6.414	-5.577	-2.965	-6.379	-5.593	-2.958	-3.76	-4.02	-0.88	-3.669	-1
UNII6	6465	103	-5.515	-4.144	-1.765	-5.885	-4.248	-1.979	-5.472	-4.425	-1.906	-5.82	-5.08	-2.43	-4.195	-1
	6545	119	-5.172	-4.694	-1.916	-5.356	-4.651	-1.979	-5.360	-5.311	-2.325	-5.82	-5.08	-2.43	-4.346	-1
UNII7	6625	135	-4.978	-5.440	-2.192	-4.942	-5.371	-2.141	-4.899	-5.118	-1.997	-5.82	-5.08	-2.43	-4.427	-1
	6705	151	-5.026	-5.174	-2.089	-5.294	-5.482	-2.376	-5.115	-5.167	-2.130	-5.82	-5.08	-2.43	-4.519	-1
	6785	167	-4.828	-5.263	-2.029	-4.872	-5.459	-2.145	-5.077	-5.394	-2.222	-5.82	-5.08	-2.43	-4.459	-1
UNII8	6865	183	-4.787	-5.155	-1.957	-4.902	-4.984	-1.932	-5.091	-5.250	-2.159	-5.63	-5.26	-2.43	-4.362	-1
	6945	199	-4.484	-5.591	-1.992	-5.019	-5.576	-2.278	-5.613	-5.465	-2.528	-5.63	-5.26	-2.43	-4.422	-1
	7025	215	-4.786	-6.172	-2.413	-5.221	-6.087	-2.622	-5.633	-5.600	-2.606	-5.63	-5.26	-2.43	-4.843	-1

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-4.110	-4.708	-1.389	-4.123	-4.974	-1.518	-4.183	-4.733	-1.439	-3.76	-4.02	-0.88	-2.269	-1
	6145	39	-3.952	-4.574	-1.242	-4.157	-4.482	-1.306	-4.202	-4.558	-1.366	-3.76	-4.02	-0.88	-2.122	-1
	6385	87	-4.604	-3.940	-1.249	-4.719	-4.306	-1.497	-4.841	-4.419	-1.615	-3.76	-4.02	-0.88	-2.129	-1
UNII6	6465	103	-4.392	-3.884	-1.120	-4.475	-3.717	-1.069	-4.373	-3.927	-1.134	-5.82	-5.08	-2.43	-3.499	-1
	6545	119	-4.203	-4.277	-1.230	-4.224	-4.198	-1.201	-4.222	-4.501	-1.349	-5.82	-5.08	-2.43	-3.631	-1
UNII7	6625	135	-3.745	-4.453	-1.074	-3.894	-4.484	-1.169	-3.860	-4.234	-1.033	-5.82	-5.08	-2.43	-3.463	-1
	6705	151	-3.879	-4.452	-1.146	-4.088	-4.219	-1.143	-4.113	-4.333	-1.212	-5.82	-5.08	-2.43	-3.573	-1
	6785	167	-3.704	-4.603	-1.120	-3.965	-4.501	-1.215	-4.173	-4.358	-1.254	-5.82	-5.08	-2.43	-3.550	-1
UNII8	6865	183	-3.305	-4.340	-0.782	-3.539	-4.363	-0.921	-3.996	-4.439	-1.202	-5.63	-5.26	-2.43	-3.212	-1
	6945	199	-3.449	-4.690	-1.015	-3.712	-4.835	-1.227	-4.274	-4.771	-1.505	-5.63	-5.26	-2.43	-3.445	-1
	7025	215	-3.345	-5.086	-1.119	-3.932	-4.836	-1.350	-4.457	-5.209	-1.807	-5.63	-5.26	-2.43	-3.549	-1

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-5.152	-5.477	-2.302	-4.996	-5.467	-2.215	-5.135	-5.404	-2.258	-3.76	-4.02	-0.88	-3.095	-1
	6145	39	-5.027	-5.123	-2.065	-4.747	-5.182	-1.949	-5.044	-5.234	-2.128	-3.76	-4.02	-0.88	-2.829	-1
	6385	87	-5.511	-5.170	-2.327	-5.864	-5.202	-2.511	-5.766	-4.962	-2.336	-3.76	-4.02	-0.88	-3.207	-1
UNII6	6465	103	-4.347	-3.889	-1.102	-4.196	-3.641	-0.900	-4.477	-3.724	-1.074	-5.82	-5.08	-2.43	-3.330	-1
	6545	119	-4.016	-4.071	-1.034	-4.045	-4.242	-1.133	-4.192	-4.127	-1.150	-5.82	-5.08	-2.43	-3.464	-1
UNII7	6625	135	-3.867	-4.224	-1.032	-3.543	-4.356	-0.921	-3.785	-4.436	-1.088	-5.82	-5.08	-2.43	-3.351	-1
	6705	151	-4.077	-4.053	-1.055	-3.661	-4.299	-0.958	-3.902	-4.374	-1.122	-5.82	-5.08	-2.43	-3.388	-1
	6785	167	-3.791	-4.284	-1.021	-3.553	-4.361	-0.928	-3.609	-4.342	-0.950	-5.82	-5.08	-2.43	-3.358	-1
UNII8	6865	183	-3.551	-4.095	-0.805	-3.718	-4.260	-0.971	-3.639	-4.424	-1.004	-5.63	-5.26	-2.43	-3.235	-1
	6945	199	-4.194	-4.675	-1.418	-3.939	-4.473	-1.188	-3.915	-4.132	-1.012	-5.63	-5.26	-2.43	-3.442	-1
	7025	215	-3.707	-4.627	-1.133	-3.322	-4.480	-0.853	-3.448	-4.651	-0.998	-5.63	-5.26	-2.43	-3.283	-1

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.665	-6.231	-2.929	-5.867	-6.458	-3.142	-6.163	-6.411	-3.275	-3.76	-4.02	-0.88	-3.809	-1
	6185	47	-5.572	-5.742	-2.646	-5.873	-6.006	-2.929	-6.062	-6.175	-3.108	-3.76	-4.02	-0.88	-3.526	-1
	6345	79	-5.381	-5.520	-2.440	-5.874	-5.305	-2.570	-5.850	-5.233	-2.520	-3.76	-4.02	-0.88	-3.320	-1
UNII6	6505	111	-6.529	-5.102	-2.747	-6.321	-5.340	-2.793	-6.519	-5.485	-2.961	-5.82	-5.08	-2.43	-5.177	-1
UNII7	6665	143	-5.764	-6.360	-3.042	-5.731	-6.357	-3.023	-5.631	-5.952	-2.778	-5.82	-5.08	-2.43	-5.208	-1
UNII8	6825	175	-5.637	-5.977	-2.794	-5.274	-5.868	-2.551	-5.427	-5.865	-2.630	-5.63	-5.26	-2.43	-4.981	-1
	6985	207	-4.755	-7.107	-2.764	-5.129	-6.837	-2.889	-5.910	-7.187	-3.492	-5.63	-5.26	-2.43	-5.194	-1

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.360	-4.543	-1.440	-4.458	-4.879	-1.653	-4.772	-5.032	-1.889	-3.76	-4.02	-0.88	-2.320	-1
	6185	47	-4.516	-4.670	-1.582	-4.395	-5.267	-1.799	-4.747	-5.249	-1.980	-3.76	-4.02	-0.88	-2.462	-1
	6345	79	-4.042	-4.352	-1.184	-4.420	-4.245	-1.321	-4.568	-4.429	-1.487	-3.76	-4.02	-0.88	-2.064	-1
UNII6	6505	111	-4.981	-4.448	-1.696	-5.250	-4.407	-1.797	-4.919	-4.526	-1.707	-5.82	-5.08	-2.43	-4.126	-1
UNII7	6665	143	-4.692	-5.913	-2.249	-4.745	-5.313	-2.009	-4.606	-5.655	-2.088	-5.82	-5.08	-2.43	-4.439	-1
UNII8	6825	175	-4.351	-5.996	-2.085	-4.382	-5.314	-1.812	-4.643	-5.656	-2.109	-5.63	-5.26	-2.43	-4.242	-1
	6985	207	-4.018	-6.731	-2.155	-4.515	-6.682	-2.454	-5.218	-6.840	-2.943	-5.63	-5.26	-2.43	-4.585	-1

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.157	-5.959	-3.047	-6.003	-5.907	-2.945	-5.999	-5.868	-2.923	-3.76	-4.02	-0.88	-3.803	-1
	6185	47	-5.971	-6.213	-3.080	-6.270	-6.192	-3.221	-6.014	-6.099	-3.046	-3.76	-4.02	-0.88	-3.926	-1
	6345	79	-6.010	-5.537	-2.757	-6.090	-5.500	-2.775	-5.912	-5.548	-2.716	-3.76	-4.02	-0.88	-3.596	-1
UNII6	6505	111	-5.211	-4.384	-1.768	-5.223	-4.289	-1.721	-5.234	-4.222	-1.689	-5.82	-5.08	-2.43	-4.119	-1
UNII7	6665	143	-4.277	-5.537	-1.851	-4.210	-5.442	-1.772	-4.566	-5.407	-1.956	-5.82	-5.08	-2.43	-4.202	-1
UNII8	6825	175	-4.566	-5.371	-1.940	-4.480	-5.206	-1.818	-4.350	-5.420	-1.842	-5.63	-5.26	-2.43	-4.248	-1
	6985	207	-4.502	-6.102	-2.219	-4.418	-5.802	-2.045	-4.118	-5.763	-1.853	-5.63	-5.26	-2.43	-4.283	-1

Mode : EHT160(80U) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.790	-6.393	-3.071	-6.322	-6.774	-3.532	-6.629	-6.839	-3.723	-3.76	-4.02	-0.88	-3.951	-1
	6185	47	-5.536	-5.885	-2.697	-5.796	-5.753	-2.764	-6.009	-6.020	-3.004	-3.76	-4.02	-0.88	-3.577	-1
	6345	79	-5.652	-5.491	-2.561	-5.996	-5.657	-2.813	-5.678	-5.242	-2.444	-3.76	-4.02	-0.88	-3.324	-1
UNII6	6505	111	-6.351	-5.461	-2.873	-6.625	-5.503	-3.018	-6.382	-5.764	-3.052	-5.82	-5.08	-2.43	-5.303	-1
UNII7	6665	143	-5.682	-6.192	-2.919	-5.782	-6.528	-3.129	-6.194	-6.416	-3.294	-5.82	-5.08	-2.43	-5.349	-1
UNII8	6825	175	-5.193	-5.569	-2.367	-5.474	-5.471	-2.462	-5.925	-5.395	-2.642	-5.63	-5.26	-2.43	-4.797	-1
	6985	207	-5.530	-5.958	-2.729	-6.019	-6.259	-3.127	-6.615	-6.613	-3.604	-5.63	-5.26	-2.43	-5.159	-1

Mode : EHT160(80U) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.661	-4.881	-1.759	-5.114	-4.986	-2.039	-5.052	-5.478	-2.249	-3.76	-4.02	-0.88	-2.639	-1
	6185	47	-4.339	-4.625	-1.469	-4.332	-4.706	-1.504	-4.752	-5.040	-1.883	-3.76	-4.02	-0.88	-2.349	-1
	6345	79	-4.810	-4.537	-1.661	-4.532	-4.562	-1.536	-4.247	-4.670	-1.443	-3.76	-4.02	-0.88	-2.323	-1
UNII6	6505	111	-5.004	-4.857	-1.919	-5.049	-4.790	-1.907	-5.317	-5.158	-2.226	-5.82	-5.08	-2.43	-4.337	-1
UNII7	6665	143	-4.398	-5.291	-1.811	-4.632	-5.608	-2.082	-4.948	-5.274	-2.097	-5.82	-5.08	-2.43	-4.241	-1
UNII8	6825	175	-4.291	-5.180	-1.702	-4.571	-4.702	-1.625	-5.275	-5.027	-2.139	-5.63	-5.26	-2.43	-4.055	-1
	6985	207	-3.973	-5.320	-1.584	-4.860	-5.292	-2.060	-5.155	-5.498	-2.312	-5.63	-5.26	-2.43	-4.014	-1

Mode : EHT160(80U) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.780	-6.294	-3.520	-6.393	-6.319	-3.346	-6.437	-6.458	-3.437	-3.76	-4.02	-0.88	-4.226	-1
	6185	47	-6.566	-6.324	-3.433	-6.246	-6.423	-3.324	-6.514	-6.189	-3.338	-3.76	-4.02	-0.88	-4.204	-1
	6345	79	-6.105	-5.948	-3.016	-6.180	-5.866	-3.010	-6.245	-5.967	-3.094	-3.76	-4.02	-0.88	-3.890	-1
UNII6	6505	111	-5.256	-4.600	-1.906	-5.068	-4.182	-1.592	-5.352	-4.699	-2.003	-5.82	-5.08	-2.43	-4.022	-1
UNII7	6665	143	-4.668	-5.307	-1.966	-4.632	-5.391	-1.985	-4.872	-5.380	-2.109	-5.82	-5.08	-2.43	-4.396	-1
UNII8	6825	175	-4.585	-4.804	-1.683	-4.437	-4.980	-1.690	-4.329	-4.893	-1.592	-5.63	-5.26	-2.43	-4.022	-1
	6985	207	-5.485	-5.179	-2.319	-5.054	-5.226	-2.129	-4.932	-5.225	-2.066	-5.63	-5.26	-2.43	-4.496	-1

Mode : EHT160 MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.072	-6.151	-3.101	-5.577	-5.828	-2.691	-5.980	-5.903	-2.931	-3.76	-4.02	-0.88	-3.571	-1
	6185	47	-5.787	-5.791	-2.779	-5.460	-5.645	-2.542	-5.702	-5.678	-2.680	-3.76	-4.02	-0.88	-3.422	-1
	6345	79	-5.791	-5.389	-2.575	-6.174	-5.626	-2.881	-6.094	-5.360	-2.702	-3.76	-4.02	-0.88	-3.455	-1
UNII6	6505	111	-5.517	-4.548	-1.996	-5.347	-4.493	-1.889	-5.646	-4.428	-1.985	-5.82	-5.08	-2.43	-4.319	-1
UNII7	6665	143	-4.742	-5.292	-1.998	-4.706	-5.375	-2.018	-4.773	-5.471	-2.098	-5.82	-5.08	-2.43	-4.428	-1
UNII8	6825	175	-4.150	-4.950	-1.522	-4.159	-4.959	-1.531	-4.404	-4.880	-1.626	-5.63	-5.26	-2.43	-3.952	-1
	6985	207	-7.075	-7.959	-4.485	-6.347	-8.096	-4.124	-6.510	-7.992	-4.178	-5.63	-5.26	-2.43	-6.554	-1

Mode : EHT320(80LL) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.440	-6.340	-2.857	-5.874	-6.027	-2.940	-5.571	-6.289	-2.905	-3.76	-4.02	-0.88	-3.737	-1
	6265	63	-5.298	-5.587	-2.430	-5.350	-4.961	-2.141	-5.379	-5.864	-2.605	-3.76	-4.02	-0.88	-3.021	-1
UNII6	6425	95	-5.761	-4.974	-2.340	-5.969	-5.068	-2.485	-5.892	-4.648	-2.216	-5.82	-5.08	-2.43	-4.646	-1
	6585	127	-5.993	-5.582	-2.773	-5.980	-5.630	-2.791	-5.885	-5.861	-2.863	-5.82	-5.08	-2.43	-5.203	-1
UNII8	6745	159	-5.440	-6.929	-3.111	-5.570	-6.506	-3.003	-5.201	-6.515	-2.798	-5.63	-5.26	-2.43	-5.228	-1
	6905	191	-4.705	-6.313	-2.425	-4.731	-6.547	-2.535	-4.837	-6.334	-2.511	-5.63	-5.26	-2.43	-4.855	-1

Mode : EHT320(80LL) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.660	-4.767	-1.703	-4.722	-5.041	-1.868	-5.099	-4.664	-1.866	-3.76	-4.02	-0.88	-2.583	-1
	6265	63	-4.211	-4.810	-1.490	-4.373	-5.054	-1.690	-4.566	-4.755	-1.649	-3.76	-4.02	-0.88	-2.370	-1
UNII6	6425	95	-4.988	-3.968	-1.438	-5.179	-4.278	-1.695	-4.930	-4.216	-1.548	-5.82	-5.08	-2.43	-3.868	-1
	6585	127	-4.951	-4.651	-1.788	-4.935	-5.059	-1.986	-4.585	-4.925	-1.742	-5.82	-5.08	-2.43	-4.172	-1
UNII8	6745	159	-4.801	-5.865	-2.290	-4.392	-5.337	-1.829	-4.666	-5.417	-2.015	-5.63	-5.26	-2.43	-4.259	-1
	6905	191	-3.880	-6.579	-2.013	-3.974	-6.539	-2.060	-4.248	-5.963	-2.011	-5.63	-5.26	-2.43	-4.441	-1

Mode : EHT320(80LL) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.866	-6.401	-3.115	-5.828	-6.011	-2.908	-5.473	-5.935	-2.688	-3.76	-4.02	-0.88	-3.568	-1
	6265	63	-6.101	-6.164	-3.122	-6.037	-6.043	-3.030	-5.871	-5.660	-2.754	-3.76	-4.02	-0.88	-3.634	-1
UNII6	6425	95	-4.999	-3.904	-1.407	-4.877	-3.761	-1.273	-4.505	-3.746	-1.099	-5.82	-5.08	-2.43	-3.529	-1
	6585	127	-4.674	-4.786	-1.720	-4.691	-4.671	-1.671	-4.533	-4.699	-1.605	-5.82	-5.08	-2.43	-4.035	-1
UNII8	6745	159	-4.263	-5.487	-1.822	-4.425	-5.311	-1.835	-4.112	-5.278	-1.646	-5.63	-5.26	-2.43	-4.076	-1
	6905	191	-4.172	-5.881	-1.933	-4.257	-5.378	-1.771	-3.957	-5.999	-1.849	-5.63	-5.26	-2.43	-4.201	-1

Mode : EHT320(80LM) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.686	-6.558	-3.090	-5.331	-5.968	-2.628	-5.466	-6.478	-2.933	-3.76	-4.02	-0.88	-3.508	-1
	6265	63	-6.145	-5.756	-2.936	-5.956	-5.910	-2.923	-6.223	-5.804	-2.998	-3.76	-4.02	-0.88	-3.803	-1
UNII6	6425	95	-6.011	-4.678	-2.283	-6.208	-5.194	-2.661	-5.826	-5.411	-2.603	-5.82	-5.08	-2.43	-4.713	-1
	6585	127	-5.753	-5.729	-2.731	-5.741	-5.916	-2.818	-5.516	-6.005	-2.744	-5.82	-5.08	-2.43	-5.161	-1
UNII8	6745	159	-5.339	-6.299	-2.782	-5.142	-6.386	-2.710	-5.884	-6.186	-3.022	-5.63	-5.26	-2.43	-5.140	-1
	6905	191	-5.175	-6.727	-2.872	-5.341	-6.402	-2.829	-5.810	-6.319	-3.047	-5.63	-5.26	-2.43	-5.259	-1

Mode : EHT320(80LM) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.842	-4.886	-1.854	-4.807	-4.892	-1.839	-4.745	-5.112	-1.915	-3.76	-4.02	-0.88	-2.719	-1
	6265	63	-4.499	-5.252	-1.849	-4.575	-5.158	-1.847	-4.806	-5.021	-1.902	-3.76	-4.02	-0.88	-2.727	-1
UNII6	6425	95	-5.127	-4.210	-1.634	-4.780	-4.149	-1.443	-4.790	-3.979	-1.356	-5.82	-5.08	-2.43	-3.786	-1
	6585	127	-4.400	-4.689	-1.532	-4.417	-5.044	-1.709	-4.558	-5.128	-1.824	-5.82	-5.08	-2.43	-3.962	-1
UNII8	6745	159	-4.039	-5.822	-1.830	-4.084	-5.353	-1.662	-4.179	-5.209	-1.653	-5.63	-5.26	-2.43	-4.083	-1
	6905	191	-3.774	-5.681	-1.614	-3.836	-5.564	-1.605	-4.108	-5.175	-1.599	-5.63	-5.26	-2.43	-4.029	-1

Mode : EHT320(80LM) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.954	-6.377	-3.150	-6.067	-6.355	-3.199	-6.132	-6.218	-3.165	-3.76	-4.02	-0.88	-4.030	-1
	6265	63	-5.675	-5.496	-2.575	-5.513	-5.157	-2.321	-5.512	-5.292	-2.391	-3.76	-4.02	-0.88	-3.201	-1
UNII6	6425	95	-4.540	-3.810	-1.150	-4.708	-3.605	-1.112	-4.754	-3.993	-1.347	-5.82	-5.08	-2.43	-3.542	-1
	6585	127	-4.332	-4.981	-1.634	-4.272	-4.694	-1.468	-4.563	-4.558	-1.550	-5.82	-5.08	-2.43	-3.898	-1
UNII8	6745	159	-4.269	-4.957	-1.589	-4.207	-4.986	-1.569	-4.131	-4.855	-1.468	-5.63	-5.26	-2.43	-3.898	-1
	6905	191	-4.418	-4.774	-1.582	-4.205	-4.562	-1.370	-4.176	-4.469	-1.310	-5.63	-5.26	-2.43	-3.740	-1

Mode : EHT320(80MH) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.955	-5.919	-2.927	-5.818	-6.132	-2.962	-6.215	-6.027	-3.110	-3.76	-4.02	-0.88	-3.807	-1
	6265	63	-5.558	-5.112	-2.319	-6.177	-5.864	-3.008	-5.980	-5.721	-2.838	-3.76	-4.02	-0.88	-3.199	-1
UNII6	6425	95	-5.859	-4.732	-2.249	-6.558	-5.290	-2.868	-6.138	-5.606	-2.854	-5.82	-5.08	-2.43	-4.679	-1
	6585	127	-5.937	-5.900	-2.908	-5.997	-6.338	-3.154	-5.628	-6.163	-2.877	-5.82	-5.08	-2.43	-5.307	-1
UNII8	6745	159	-5.487	-6.289	-2.859	-5.808	-6.238	-3.008	-6.074	-6.148	-3.101	-5.63	-5.26	-2.43	-5.289	-1
	6905	191	-5.392	-5.933	-2.644	-6.342	-6.071	-3.194	-6.791	-5.926	-3.327	-5.63	-5.26	-2.43	-5.074	-1

Mode : EHT320(80MH) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.124	-4.611	-1.351	-4.645	-5.027	-1.822	-4.784	-4.964	-1.863	-3.76	-4.02	-0.88	-2.231	-1
	6265	63	-4.240	-4.659	-1.434	-4.823	-4.917	-1.860	-4.751	-4.845	-1.788	-3.76	-4.02	-0.88	-2.314	-1
UNII6	6425	95	-4.542	-4.070	-1.290	-4.797	-4.750	-1.763	-4.773	-4.982	-1.866	-5.82	-5.08	-2.43	-3.720	-1
	6585	127	-4.246	-5.056	-1.622	-4.238	-5.022	-1.602	-4.472	-5.179	-1.801	-5.82	-5.08	-2.43	-4.032	-1
UNII8	6745	159	-4.452	-5.187	-1.794	-4.948	-4.911	-1.919	-4.681	-4.728	-1.694	-5.63	-5.26	-2.43	-4.124	-1
	6905	191	-4.356	-4.577	-1.455	-4.863	-4.835	-1.839	-5.566	-5.282	-2.412	-5.63	-5.26	-2.43	-3.885	-1

Mode : EHT320(80MH) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.200	-5.310	-2.245	-4.826	-4.902	-1.854	-5.183	-5.310	-2.236	-3.76	-4.02	-0.88	-2.734	-1
	6265	63	-5.365	-5.113	-2.227	-5.219	-4.683	-1.933	-5.347	-5.005	-2.163	-3.76	-4.02	-0.88	-2.813	-1
UNII6	6425	95	-4.550	-3.884	-1.194	-4.378	-3.400	-0.851	-4.555	-3.874	-1.191	-5.82	-5.08	-2.43	-3.281	-1
	6585	127	-4.140	-4.792	-1.444	-3.828	-4.537	-1.158	-4.248	-4.722	-1.468	-5.82	-5.08	-2.43	-3.588	-1
UNII8	6745	159	-3.871	-4.951	-1.367	-3.900	-4.651	-1.249	-3.938	-4.858	-1.364	-5.63	-5.26	-2.43	-3.679	-1
	6905	191	-4.024	-4.310	-1.155	-3.600	-3.895	-0.735	-4.030	-4.168	-1.088	-5.63	-5.26	-2.43	-3.165	-1

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.372	-6.143	-3.246	-6.606	-6.402	-3.493	-6.669	-6.497	-3.572	-3.76	-4.02	-0.88	-4.126	-1
	6265	63	-5.972	-5.354	-2.642	-6.242	-5.889	-3.052	-5.833	-6.255	-3.029	-3.76	-4.02	-0.88	-3.522	-1
UNII6	6425	95	-5.928	-5.816	-2.862	-6.453	-5.720	-3.061	-6.074	-5.472	-2.752	-5.82	-5.08	-2.43	-5.182	-1
	6585	127	-5.705	-5.873	-2.778	-6.446	-5.758	-3.078	-6.346	-5.566	-2.928	-5.82	-5.08	-2.43	-5.208	-1
UNII8	6745	159	-6.072	-6.077	-3.064	-6.106	-5.900	-2.992	-6.830	-6.251	-3.521	-5.63	-5.26	-2.43	-5.422	-1
	6905	191	-6.311	-5.790	-3.033	-6.568	-5.909	-3.216	-7.165	-6.072	-3.574	-5.63	-5.26	-2.43	-5.463	-1

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.639	-4.811	-1.714	-5.002	-5.041	-2.011	-5.015	-5.185	-2.089	-3.76	-4.02	-0.88	-2.594	-1
	6265	63	-4.724	-4.761	-1.732	-4.881	-5.155	-2.006	-4.904	-4.883	-1.883	-3.76	-4.02	-0.88	-2.612	-1
UNII6	6425	95	-4.256	-4.617	-1.423	-5.109	-4.854	-1.970	-5.061	-4.905	-1.972	-5.82	-5.08	-2.43	-3.853	-1
	6585	127	-4.272	-4.736	-1.488	-4.523	-5.105	-1.794	-4.876	-4.929	-1.892	-5.82	-5.08	-2.43	-3.918	-1
UNII8	6745	159	-4.934	-4.678	-1.794	-5.330	-5.008	-2.156	-5.723	-5.178	-2.432	-5.63	-5.26	-2.43	-4.224	-1
	6905	191	-4.838	-5.054	-1.935	-5.362	-5.166	-2.253	-6.280	-5.280	-2.741	-5.63	-5.26	-2.43	-4.365	-1

Mode : EHT320(80HH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.082	-5.967	-3.014	-5.964	-6.063	-3.003	-5.980	-5.724	-2.840	-3.76	-4.02	-0.88	-3.720	-1
	6265	63	-5.964	-5.965	-2.954	-5.671	-5.354	-2.500	-5.771	-5.648	-2.699	-3.76	-4.02	-0.88	-3.380	-1
UNII6	6425	95	-4.672	-4.662	-1.657	-4.855	-4.621	-1.726	-4.949	-4.368	-1.639	-5.82	-5.08	-2.43	-4.069	-1
	6585	127	-4.586	-4.834	-1.698	-4.195	-4.784	-1.469	-4.451	-4.652	-1.540	-5.82	-5.08	-2.43	-3.899	-1
UNII8	6745	159	-5.242	-4.749	-1.978	-4.777	-4.891	-1.824	-4.898	-4.842	-1.860	-5.63	-5.26	-2.43	-4.254	-1
	6905	191	-5.990	-4.867	-2.382	-5.458	-5.146	-2.289	-5.758	-5.054	-2.382	-5.63	-5.26	-2.43	-4.719	-1

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.780	-5.766	-2.763	-5.745	-6.035	-2.877	-5.732	-6.127	-2.915	-3.76	-4.02	-0.88	-3.643	-1
	6265	63	-5.281	-5.290	-2.275	-5.480	-5.045	-2.247	-5.550	-5.484	-2.507	-3.76	-4.02	-0.88	-3.127	-1
UNII6	6425	95	-4.147	-3.541	-0.823	-4.452	-3.634	-1.013	-4.525	-3.736	-1.102	-5.82	-5.08	-2.43	-3.253	-1
	6585	127	-4.304	-4.580	-1.429	-4.385	-4.231	-1.297	-4.628	-4.547	-1.577	-5.82	-5.08	-2.43	-3.727	-1
UNII8	6745	159	-4.122	-4.457	-1.276	-4.079	-4.296	-1.176	-4.309	-4.777	-1.526	-5.63	-5.26	-2.43	-3.606	-1
	6905	191	-7.125	-7.099	-4.102	-7.042	-7.338	-4.177	-7.011	-7.583	-4.277	-5.63	-5.26	-2.43	-6.532	-1

Mode : EHT320(160U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.245	-5.378	-2.301	-4.705	-4.863	-1.773	-4.806	-4.835	-1.810	-3.76	-4.02	-0.88	-2.653	-1
	6265	63	-5.309	-5.296	-2.292	-4.722	-4.468	-1.583	-5.088	-5.015	-2.041	-3.76	-4.02	-0.88	-2.463	-1
UNII6	6425	95	-4.198	-4.076	-1.126	-3.945	-3.312	-0.607	-4.398	-3.580	-0.959	-5.82	-5.08	-2.43	-3.037	-1
	6585	127	-4.322	-4.510	-1.405	-3.374	-4.312	-0.807	-3.974	-4.421	-1.181	-5.82	-5.08	-2.43	-3.237	-1
UNII8	6745	159	-4.207	-4.568	-1.373	-3.480	-4.514	-0.956	-3.886	-4.399	-1.125	-5.63	-5.26	-2.43	-3.386	-1
	6905	191	-7.608	-7.319	-4.451	-6.649	-6.900	-3.762	-6.955	-7.432	-4.177	-5.63	-5.26	-2.43	-6.192	-1

Mode : EHT320 3x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.174	-6.326	-3.239	-6.024	-6.516	-3.253	-6.413	-6.791	-3.588	-3.76	-4.02	-0.88	-4.119	-1
	6265	63	-6.159	-6.184	-3.161	-6.105	-5.988	-3.036	-6.236	-6.079	-3.147	-3.76	-4.02	-0.88	-3.916	-1
UNII6	6425	95	-6.144	-5.414	-2.753	-5.804	-5.303	-2.536	-6.357	-5.583	-2.943	-5.82	-5.08	-2.43	-4.966	-1
	6585	127	-5.891	-6.379	-3.118	-5.588	-6.199	-2.873	-5.954	-6.241	-3.085	-5.82	-5.08	-2.43	-5.303	-1
UNII8	6745	159	-5.929	-6.303	-3.102	-5.661	-6.169	-2.897	-5.938	-6.358	-3.133	-5.63	-5.26	-2.43	-5.327	-1
	6905	191	-10.030	-10.448	-7.224	-9.765	-10.054	-6.897	-10.142	-9.864	-6.991	-5.63	-5.26	-2.43	-9.327	-1

Mode : EHT320 2x996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.452	-5.923	-2.671	-5.279	-5.766	-2.506	-5.554	-5.483	-2.509	-3.76	-4.02	-0.88	-3.386	-1
	6265	63	-5.426	-5.512	-2.459	-5.555	-5.241	-2.385	-5.532	-5.276	-2.392	-3.76	-4.02	-0.88	-3.265	-1
UNII6	6425	95	-5.637	-4.304	-1.910	-5.387	-4.646	-1.991	-5.668	-4.568	-2.073	-5.82	-5.08	-2.43	-4.340	-1
	6585	127	-5.393	-5.451	-2.412	-5.379	-5.446	-2.403	-4.755	-5.400	-2.056	-5.82	-5.08	-2.43	-4.486	-1
UNII8	6745	159	-5.420	-5.652	-2.525	-5.224	-5.299	-2.251	-5.287	-5.603	-2.432	-5.63	-5.26	-2.43	-4.681	-1
	6905	191	-9.443	-9.501	-6.462	-9.315	-9.112	-6.202	-9.318	-9.072	-6.183	-5.63	-5.26	-2.43	-8.613	-1

Mode : EHT320 3x996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.899	-7.182	-4.028	-7.022	-7.073	-4.037	-6.854	-7.195	-4.011	-3.76	-4.02	-0.88	-4.891	-1
	6265	63	-6.870	-6.796	-3.822	-6.946	-6.641	-3.780	-6.966	-6.681	-3.811	-3.76	-4.02	-0.88	-4.660	-1
UNII6	6425	95	-6.815	-5.940	-3.345	-6.284	-5.830	-3.041	-6.782	-6.175	-3.457	-5.82	-5.08	-2.43	-5.471	-1
	6585	127	-6.511	-7.080	-3.776	-6.296	-6.630	-3.449	-6.723	-6.991	-3.844	-5.82	-5.08	-2.43	-5.879	-1
UNII8	6745	159	-6.596	-6.922	-3.745	-6.457	-6.729	-3.580	-6.410	-6.698	-3.541	-5.63	-5.26	-2.43	-5.971	-1
	6905	191	-10.518	-10.965	-7.725	-10.449	-10.612	-7.519	-10.214	-10.503	-7.346	-5.63	-5.26	-2.43	-9.776	-1

10.4.2 Standard client

Standard client Limit : 17 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-1.250	-1.175	1.798	-2.475	-3.043	0.260	-1.251	-1.756	1.514	-3.76	-4.02	-0.88	0.918	17
	6175	45	10.656	11.324	14.013	9.345	9.672	12.522	10.552	11.083	13.836	-3.76	-4.02	-0.88	13.133	17
	6415	93	10.165	10.962	13.592	8.594	9.674	12.178	9.809	11.132	13.531	-3.76	-4.02	-0.88	12.712	17
UNII7	6535	117	9.920	10.595	13.281	8.521	9.171	11.868	9.856	10.517	13.209	-5.82	-5.08	-2.43	10.851	17
	6695	149	10.326	9.994	13.173	8.938	8.725	11.843	10.247	10.024	13.147	-5.82	-5.08	-2.43	10.743	17
	6855	181	10.853	10.278	13.585	9.191	9.089	12.151	10.695	10.360	13.541	-5.82	-5.08	-2.43	11.155	17

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-1.997	-2.227	0.900	-2.304	-2.417	0.650	-1.904	-2.321	0.903	-3.76	-4.02	-0.88	0.023	17
	6175	45	7.950	8.406	11.194	7.845	8.244	11.059	7.890	8.149	11.032	-3.76	-4.02	-0.88	10.314	17
	6415	93	7.185	8.231	10.750	6.921	8.202	10.619	7.161	8.505	10.895	-3.76	-4.02	-0.88	10.015	17
UNII7	6535	117	7.226	7.650	10.453	6.857	7.405	10.150	7.016	7.705	10.384	-5.82	-5.08	-2.43	8.023	17
	6695	149	7.514	7.336	10.436	7.230	7.223	10.237	7.286	7.376	10.341	-5.82	-5.08	-2.43	8.006	17
	6855	181	8.148	7.540	10.865	7.851	7.249	10.571	8.083	7.742	10.926	-5.82	-5.08	-2.43	8.496	17

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.453	-3.815	-0.620	-	-	-	-3.487	-3.821	-0.640	-3.76	-4.02	-0.88	-1.500	17
	6175	45	5.017	5.193	8.116	-	-	-	4.824	5.096	7.973	-3.76	-4.02	-0.88	7.236	17
	6415	93	4.066	5.121	7.636	-	-	-	4.108	5.351	7.784	-3.76	-4.02	-0.88	6.904	17
UNII7	6535	117	4.061	4.579	7.338	-	-	-	3.964	4.762	7.392	-5.82	-5.08	-2.43	4.962	17
	6695	149	4.430	4.423	7.437	-	-	-	4.398	4.579	7.500	-5.82	-5.08	-2.43	5.070	17
	6855	181	4.965	4.359	7.683	-	-	-	4.685	4.709	7.707	-5.82	-5.08	-2.43	5.277	17

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-5.172	-5.647	-2.393	-	-	-	-3.76	-4.02	-0.88	-3.273	17
	6175	45	-	-	-	4.482	4.255	7.380	-	-	-	-3.76	-4.02	-0.88	6.500	17
	6415	93	-	-	-	4.025	5.048	7.577	-	-	-	-3.76	-4.02	-0.88	6.697	17
UNII7	6535	117	-	-	-	4.087	4.608	7.366	-	-	-	-5.82	-5.08	-2.43	4.936	17
	6695	149	-	-	-	4.219	4.225	7.232	-	-	-	-5.82	-5.08	-2.43	4.802	17
	6855	181	-	-	-	4.655	4.381	7.531	-	-	-	-5.82	-5.08	-2.43	5.101	17

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-5.393	-5.960	-2.657	-	-	-	-3.76	-4.02	-0.88	-3.537	17
	6175	45	-	-	-	3.912	3.915	6.924	-	-	-	-3.76	-4.02	-0.88	6.044	17
	6415	93	-	-	-	3.653	4.498	7.106	-	-	-	-3.76	-4.02	-0.88	6.226	17
UNII7	6535	117	-	-	-	3.545	4.111	6.848	-	-	-	-5.82	-5.08	-2.43	4.418	17
	6695	149	-	-	-	3.737	3.967	6.864	-	-	-	-5.82	-5.08	-2.43	4.434	17
	6855	181	-	-	-	4.187	4.001	7.105	-	-	-	-5.82	-5.08	-2.43	4.675	17

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	10.833	11.052	13.954	10.693	10.897	13.807	11.053	10.702	13.892	-3.76	-4.02	-0.88	13.074	17
	6165	43	10.925	11.155	14.052	10.588	10.919	13.767	10.885	10.960	13.933	-3.76	-4.02	-0.88	13.172	17
	6405	91	9.703	10.712	13.247	9.813	10.896	13.399	9.800	11.193	13.563	-3.76	-4.02	-0.88	12.683	17
UNII7	6565	123	10.263	10.116	13.201	10.050	9.658	12.869	10.186	9.967	13.088	-5.82	-5.08	-2.43	10.771	17
	6685	147	10.244	10.017	13.142	9.729	9.624	12.687	10.008	9.945	12.987	-5.82	-5.08	-2.43	10.712	17
	6845	179	10.829	10.227	13.549	10.575	9.981	13.299	10.417	10.340	13.389	-5.82	-5.08	-2.43	11.119	17

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	8.160	8.022	11.102	7.849	7.791	10.830	8.056	7.961	11.019	-3.76	-4.02	-0.88	10.222	17
	6165	43	8.453	8.386	11.430	7.794	8.171	10.997	7.974	8.148	11.072	-3.76	-4.02	-0.88	10.550	17
	6405	91	7.038	7.963	10.535	6.880	7.989	10.480	7.126	8.065	10.631	-3.76	-4.02	-0.88	9.751	17
UNII7	6565	123	7.234	7.119	10.187	7.113	6.851	9.994	7.276	6.847	10.077	-5.82	-5.08	-2.43	7.757	17
	6685	147	7.317	7.408	10.373	7.350	7.154	10.263	7.100	7.571	10.352	-5.82	-5.08	-2.43	7.943	17
	6845	179	8.102	7.484	10.814	7.775	7.180	10.498	7.716	7.369	10.556	-5.82	-5.08	-2.43	8.384	17

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	5.156	5.034	8.106	4.969	4.902	7.946	5.015	5.079	8.057	-3.76	-4.02	-0.88	7.226	17
	6165	43	5.195	5.502	8.361	5.102	5.010	8.066	4.953	5.028	8.001	-3.76	-4.02	-0.88	7.481	17
	6405	91	4.146	5.132	7.677	3.863	5.014	7.487	4.080	5.193	7.682	-3.76	-4.02	-0.88	6.802	17
UNII7	6565	123	4.351	4.165	7.269	4.165	4.046	7.116	4.384	4.086	7.248	-5.82	-5.08	-2.43	4.839	17
	6685	147	4.292	4.463	7.388	4.150	4.126	7.148	4.262	4.416	7.350	-5.82	-5.08	-2.43	4.958	17
	6845	179	5.068	4.528	7.816	4.811	4.172	7.513	4.642	4.414	7.540	-5.82	-5.08	-2.43	5.386	17

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	4.621	4.716	7.679	-	-	-	4.611	4.529	7.581	-3.76	-4.02	-0.88	6.799	17
	6165	43	4.961	4.475	7.735	-	-	-	4.401	4.169	7.297	-3.76	-4.02	-0.88	6.855	17
	6405	91	4.109	4.850	7.506	-	-	-	4.108	5.006	7.591	-3.76	-4.02	-0.88	6.711	17
UNII7	6565	123	4.237	4.300	7.279	-	-	-	4.075	3.871	6.985	-5.82	-5.08	-2.43	4.849	17
	6685	147	4.140	4.475	7.321	-	-	-	3.999	4.262	7.143	-5.82	-5.08	-2.43	4.891	17
	6845	179	4.780	4.533	7.669	-	-	-	4.479	4.384	7.442	-5.82	-5.08	-2.43	5.239	17

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	1.738	1.726	4.742	-	-	-	-3.76	-4.02	-0.88	3.862	17
	6165	43	-	-	-	1.658	1.766	4.723	-	-	-	-3.76	-4.02	-0.88	3.843	17
	6405	91	-	-	-	1.158	1.993	4.606	-	-	-	-3.76	-4.02	-0.88	3.726	17
UNII7	6565	123	-	-	-	1.259	0.958	4.121	-	-	-	-5.82	-5.08	-2.43	1.691	17
	6685	147	-	-	-	1.193	1.411	4.314	-	-	-	-5.82	-5.08	-2.43	1.884	17
	6845	179	-	-	-	1.875	1.556	4.729	-	-	-	-5.82	-5.08	-2.43	2.299	17

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	1.274	1.469	4.383	-	-	-	-3.76	-4.02	-0.88	3.503	17
	6165	43	-	-	-	1.231	1.165	4.209	-	-	-	-3.76	-4.02	-0.88	3.329	17
	6405	91	-	-	-	0.694	1.528	4.141	-	-	-	-3.76	-4.02	-0.88	3.261	17
UNII7	6565	123	-	-	-	0.856	0.734	3.806	-	-	-	-5.82	-5.08	-2.43	1.376	17
	6685	147	-	-	-	0.787	0.925	3.867	-	-	-	-5.82	-5.08	-2.43	1.437	17
	6845	179	-	-	-	1.454	1.075	4.279	-	-	-	-5.82	-5.08	-2.43	1.849	17

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	10.666	10.603	13.645	10.537	10.793	13.678	10.927	10.261	13.617	-3.76	-4.02	-0.88	12.798	17
	6145	39	10.900	11.174	14.050	10.783	10.971	13.889	10.609	10.999	13.819	-3.76	-4.02	-0.88	13.170	17
	6385	87	9.890	10.571	13.255	9.800	10.566	13.211	10.013	10.551	13.301	-3.76	-4.02	-0.88	12.421	17
UNII7	6625	135	10.019	9.564	12.808	10.190	10.180	13.196	10.200	10.170	13.196	-5.82	-5.08	-2.43	10.766	17
	6705	151	10.193	9.971	13.094	9.984	9.742	12.875	9.775	9.952	12.875	-5.82	-5.08	-2.43	10.664	17
	6785	167	10.426	9.546	13.019	10.137	9.465	12.825	9.839	10.035	12.949	-5.82	-5.08	-2.43	10.589	17

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	8.305	8.071	11.200	8.320	8.112	11.228	7.977	8.046	11.022	-3.76	-4.02	-0.88	10.348	17
	6145	39	8.519	8.006	11.281	8.083	8.572	11.345	8.137	8.270	11.215	-3.76	-4.02	-0.88	10.465	17
	6385	87	7.411	8.248	10.860	7.034	7.913	10.506	7.103	8.211	10.703	-3.76	-4.02	-0.88	9.980	17
UNII7	6625	135	7.527	7.189	10.372	7.285	7.450	10.379	7.528	7.394	10.472	-5.82	-5.08	-2.43	8.042	17
	6705	151	7.436	7.365	10.411	7.278	6.907	10.107	7.117	7.492	10.319	-5.82	-5.08	-2.43	7.981	17
	6785	167	8.004	6.993	10.538	7.797	7.042	10.446	7.302	7.324	10.324	-5.82	-5.08	-2.43	8.108	17

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	5.190	5.153	8.182	5.128	4.935	8.043	4.966	4.906	7.946	-3.76	-4.02	-0.88	7.302	17
	6145	39	5.184	5.357	8.281	5.078	5.229	8.164	5.014	5.472	8.259	-3.76	-4.02	-0.88	7.401	17
	6385	87	4.135	5.202	7.711	4.176	4.915	7.571	4.087	4.899	7.522	-3.76	-4.02	-0.88	6.831	17
UNII7	6625	135	4.535	4.210	7.386	4.501	4.463	7.492	4.496	4.380	7.448	-5.82	-5.08	-2.43	5.062	17
	6705	151	4.336	4.411	7.384	4.703	4.296	7.514	4.232	4.682	7.473	-5.82	-5.08	-2.43	5.084	17
	6785	167	4.654	4.048	7.372	4.501	3.945	7.242	4.180	4.428	7.316	-5.82	-5.08	-2.43	4.942	17

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	4.632	4.714	7.684	4.635	4.532	7.594	4.749	4.545	7.659	-3.76	-4.02	-0.88	6.804	17
	6145	39	4.619	4.406	7.524	4.763	4.453	7.621	4.522	4.341	7.443	-3.76	-4.02	-0.88	6.741	17
	6385	87	4.001	5.084	7.587	3.985	5.024	7.546	4.049	4.842	7.474	-3.76	-4.02	-0.88	6.707	17
UNII7	6625	135	4.381	4.007	7.208	4.596	4.345	7.483	4.459	4.429	7.454	-5.82	-5.08	-2.43	5.053	17
	6705	151	4.561	4.227	7.408	4.231	4.446	7.350	4.047	4.341	7.207	-5.82	-5.08	-2.43	4.978	17
	6785	167	4.653	4.309	7.495	4.522	4.238	7.393	4.377	4.383	7.390	-5.82	-5.08	-2.43	5.065	17

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	1.927	1.452	4.706	-	-	-	1.766	1.726	4.756	-3.76	-4.02	-0.88	3.876	17
	6145	39	1.864	1.535	4.713	-	-	-	1.870	1.599	4.747	-3.76	-4.02	-0.88	3.867	17
	6385	87	1.308	2.118	4.742	-	-	-	1.044	1.980	4.547	-3.76	-4.02	-0.88	3.862	17
UNII7	6625	135	1.653	1.179	4.433	-	-	-	1.643	1.562	4.613	-5.82	-5.08	-2.43	2.183	17
	6705	151	1.456	1.594	4.536	-	-	-	1.241	1.670	4.471	-5.82	-5.08	-2.43	2.106	17
	6785	167	1.679	1.499	4.600	-	-	-	1.540	1.271	4.418	-5.82	-5.08	-2.43	2.170	17

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-1.392	-1.332	1.648	-	-	-	-3.76	-4.02	-0.88	0.768	17
	6145	39	-	-	-	-1.375	-1.408	1.619	-	-	-	-3.76	-4.02	-0.88	0.739	17
	6385	87	-	-	-	-1.930	-0.963	1.591	-	-	-	-3.76	-4.02	-0.88	0.711	17
UNII7	6625	135	-	-	-	-1.723	-1.577	1.361	-	-	-	-5.82	-5.08	-2.43	-1.069	17
	6705	151	-	-	-	-1.720	-1.824	1.239	-	-	-	-5.82	-5.08	-2.43	-1.191	17
	6785	167	-	-	-	-1.417	-1.875	1.370	-	-	-	-5.82	-5.08	-2.43	-1.060	17

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-1.684	-1.529	1.405	-	-	-	-3.76	-4.02	-0.88	0.525	17
	6145	39	-	-	-	-1.579	-1.832	1.307	-	-	-	-3.76	-4.02	-0.88	0.427	17
	6385	87	-	-	-	-2.101	-1.406	1.271	-	-	-	-3.76	-4.02	-0.88	0.391	17
UNII7	6625	135	-	-	-	-1.858	-1.761	1.201	-	-	-	-5.82	-5.08	-2.43	-1.229	17
	6705	151	-	-	-	-1.986	-1.949	1.043	-	-	-	-5.82	-5.08	-2.43	-1.387	17
	6785	167	-	-	-	-1.605	-2.058	1.185	-	-	-	-5.82	-5.08	-2.43	-1.245	17

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	10.115	9.814	12.978	9.695	9.857	12.787	9.887	9.501	12.709	-3.76	-4.02	-0.88	12.098	17
	6185	47	10.065	9.322	12.720	10.043	9.978	13.021	9.681	9.390	12.549	-3.76	-4.02	-0.88	12.141	17
	6345	79	9.536	10.055	12.814	9.422	10.060	12.763	9.422	10.163	12.819	-3.76	-4.02	-0.88	11.939	17
UNII7	6665	143	9.361	7.920	11.711	9.219	8.392	11.836	9.197	8.897	12.060	-5.82	-5.08	-2.43	9.630	17

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	7.339	7.628	10.497	7.056	7.486	10.287	7.149	6.920	10.047	-3.76	-4.02	-0.88	9.617	17
	6185	47	7.546	7.358	10.464	7.290	7.163	10.238	6.952	7.379	10.181	-3.76	-4.02	-0.88	9.584	17
	6345	79	6.523	7.306	9.943	6.613	7.063	9.855	6.620	7.724	10.218	-3.76	-4.02	-0.88	9.338	17
UNII7	6665	143	6.424	5.581	9.034	6.535	6.048	9.309	6.463	6.456	9.470	-5.82	-5.08	-2.43	7.040	17

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	4.526	4.444	7.496	4.296	4.604	7.463	4.230	4.311	7.281	-3.76	-4.02	-0.88	6.616	17
	6185	47	4.626	4.373	7.512	4.466	4.461	7.474	4.163	4.177	7.180	-3.76	-4.02	-0.88	6.632	17
	6345	79	3.852	4.441	7.167	3.729	4.295	7.032	3.821	4.553	7.213	-3.76	-4.02	-0.88	6.333	17
UNII7	6665	143	3.556	3.094	6.342	3.715	3.473	6.606	3.705	3.209	6.474	-5.82	-5.08	-2.43	4.176	17

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	4.055	3.857	6.967	3.866	3.850	6.868	3.624	3.607	6.625	-3.76	-4.02	-0.88	6.087	17
	6185	47	3.976	3.760	6.879	3.884	3.614	6.761	3.951	3.674	6.825	-3.76	-4.02	-0.88	5.999	17
	6345	79	4.033	4.290	7.173	3.817	4.268	7.058	3.711	4.325	7.039	-3.76	-4.02	-0.88	6.293	17
UNII7	6665	143	3.594	3.198	6.410	3.549	3.132	6.355	3.784	3.245	6.533	-5.82	-5.08	-2.43	4.103	17

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	0.987	0.998	4.003	-	-	-	0.930	0.799	3.875	-3.76	-4.02	-0.88	3.123	17
	6185	47	1.219	0.891	4.068	-	-	-	0.803	0.659	3.742	-3.76	-4.02	-0.88	3.188	17
	6345	79	0.842	1.524	4.207	-	-	-	0.823	1.237	4.045	-3.76	-4.02	-0.88	3.327	17
UNII7	6665	143	0.643	0.373	3.520	-	-	-	0.687	0.570	3.639	-5.82	-5.08	-2.43	1.209	17

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-2.051	-2.027	0.971	-	-	-	-3.76	-4.02	-0.88	0.091	17
	6185	47	-	-	-	-2.220	-2.439	0.682	-	-	-	-3.76	-4.02	-0.88	-0.198	17
	6345	79	-	-	-	-2.253	-1.927	0.923	-	-	-	-3.76	-4.02	-0.88	0.043	17
UNII7	6665	143	-	-	-	-2.330	-2.539	0.577	-	-	-	-5.82	-5.08	-2.43	-1.853	17

Mode : EHT160(80U) 26T

Model: UN10000/201

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	9.845	10.066	12.968	9.602	9.499	12.561	9.157	9.052	12.116	-3.76	-4.02	-0.88	12.088	17
	6185	47	9.621	9.385	12.515	9.659	9.545	12.613	9.103	9.272	12.199	-3.76	-4.02	-0.88	11.733	17
	6345	79	9.236	9.907	12.595	9.214	9.836	12.547	9.138	9.817	12.501	-3.76	-4.02	-0.88	11.715	17
UNII7	6665	143	9.640	8.706	12.209	9.346	8.716	12.053	8.958	8.747	11.864	-5.82	-5.08	-2.43	9.779	17

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	7.266	6.902	10.099	6.749	7.149	9.964	6.309	6.653	9.495	-3.76	-4.02	-0.88	9.219	17
	6185	47	6.966	7.014	10.001	6.528	7.106	9.837	6.481	6.638	9.571	-3.76	-4.02	-0.88	9.121	17
	6345	79	6.425	7.276	9.882	6.530	7.016	9.791	6.221	6.678	9.466	-3.76	-4.02	-0.88	9.002	17
UNII7	6665	143	6.676	5.938	9.333	6.763	6.277	9.538	6.324	6.188	9.267	-5.82	-5.08	-2.43	7.108	17

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	4.288	4.156	7.233	3.963	4.484	7.242	3.675	3.539	6.618	-3.76	-4.02	-0.88	6.362	17
	6185	47	4.105	4.392	7.261	3.921	4.260	7.104	3.708	3.904	6.817	-3.76	-4.02	-0.88	6.381	17
	6345	79	3.801	4.264	7.049	3.902	4.103	7.014	3.671	4.102	6.902	-3.76	-4.02	-0.88	6.169	17
UNII7	6665	143	3.803	3.241	6.541	3.556	3.485	6.531	3.450	3.422	6.446	-5.82	-5.08	-2.43	4.111	17

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.690	3.435	6.574	3.524	3.336	6.441	2.984	3.134	6.070	-3.76	-4.02	-0.88	5.694	17
	6185	47	3.584	3.484	6.544	3.308	3.491	6.410	3.048	3.445	6.261	-3.76	-4.02	-0.88	5.664	17
	6345	79	3.515	4.168	6.864	3.657	4.062	6.874	3.611	3.908	6.772	-3.76	-4.02	-0.88	5.994	17
UNII7	6665	143	3.637	3.371	6.516	3.557	3.135	6.361	3.457	3.574	6.526	-5.82	-5.08	-2.43	4.096	17

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	0.665	0.786	3.736	-	-	-	0.378	0.639	3.521	-3.76	-4.02	-0.88	2.856	17
	6185	47	0.429	0.406	3.428	-	-	-	0.442	0.398	3.430	-3.76	-4.02	-0.88	2.550	17
	6345	79	0.610	1.342	4.002	-	-	-	0.942	1.189	4.077	-3.76	-4.02	-0.88	3.197	17
UNII7	6665	143	0.950	0.444	3.715	-	-	-	0.613	0.444	3.539	-5.82	-5.08	-2.43	1.285	17

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-2.310	-2.216	0.748	-	-	-	-3.76	-4.02	-0.88	-0.132	17
	6185	47	-	-	-	-2.548	-2.661	0.406	-	-	-	-3.76	-4.02	-0.88	-0.474	17
	6345	79	-	-	-	-2.513	-1.888	0.821	-	-	-	-3.76	-4.02	-0.88	-0.059	17
UNII7	6665	143	-	-	-	-2.143	-2.558	0.665	-	-	-	-5.82	-5.08	-2.43	-1.765	17

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-5.324	-5.492	-2.397	-	-	-	-3.76	-4.02	-0.88	-3.277	17
	6185	47	-	-	-	-5.488	-5.888	-2.673	-	-	-	-3.76	-4.02	-0.88	-3.553	17
	6345	79	-	-	-	-5.395	-4.930	-2.146	-	-	-	-3.76	-4.02	-0.88	-3.026	17
UNII7	6665	143	-	-	-	-5.394	-6.130	-2.736	-	-	-	-5.82	-5.08	-2.43	-5.166	17

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-4.738	-4.816	-1.767	-	-	-	-3.76	-4.02	-0.88	-2.647	17
	6185	47	-	-	-	-4.896	-4.971	-1.924	-	-	-	-3.76	-4.02	-0.88	-2.804	17
	6345	79	-	-	-	-4.908	-4.412	-1.643	-	-	-	-3.76	-4.02	-0.88	-2.523	17
UNII7	6665	143	-	-	-	-4.719	-5.466	-2.067	-	-	-	-5.82	-5.08	-2.43	-4.497	17

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	9.803	9.645	12.735	9.817	9.357	12.604	9.725	9.483	12.616	-3.76	-4.02	-0.88	11.855	17
	6265	63	9.912	9.735	12.835	10.059	9.566	12.830	9.937	9.569	12.767	-3.76	-4.02	-0.88	11.955	17
UNII5 52T	6105	31	7.429	7.290	10.370	7.091	6.862	9.988	7.198	7.331	10.275	-3.76	-4.02	-0.88	9.490	17
	6265	63	7.428	7.432	10.440	7.454	7.183	10.331	7.273	7.170	10.232	-3.76	-4.02	-0.88	9.560	17
UNII5 106T	6105	31	5.031	4.287	7.685	4.328	4.021	7.187	4.464	4.414	7.449	-3.76	-4.02	-0.88	6.805	17
	6265	63	4.681	4.324	7.516	4.173	4.003	7.099	4.171	4.569	7.385	-3.76	-4.02	-0.88	6.636	17
UNII5 242T	6105	31	4.019	3.503	6.778	3.824	3.384	6.619	3.967	3.584	6.790	-3.76	-4.02	-0.88	5.910	17
	6265	63	4.007	4.150	7.089	3.916	3.939	6.937	3.667	3.766	6.727	-3.76	-4.02	-0.88	6.209	17
UNII5 484T	6105	31	1.245	0.708	3.995	-	-	-	0.910	0.569	3.753	-3.76	-4.02	-0.88	3.115	17
	6265	63	1.151	1.257	4.214	-	-	-	1.176	0.964	4.081	-3.76	-4.02	-0.88	3.334	17
UNII5 996T	6105	31	-	-	-	-2.079	-2.437	0.756	-	-	-	-3.76	-4.02	-0.88	-0.124	17
	6265	63	-	-	-	-2.067	-2.019	0.967	-	-	-	-3.76	-4.02	-0.88	0.087	17

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	10.091	9.434	12.785	9.618	9.173	12.412	9.813	9.310	12.579	-3.76	-4.02	-0.88	11.905	17
	6265	63	9.349	9.701	12.539	9.221	9.089	12.166	9.421	9.233	12.339	-3.76	-4.02	-0.88	11.659	17
UNII5 52T	6105	31	7.126	7.006	10.077	7.183	6.733	9.974	6.919	6.593	9.769	-3.76	-4.02	-0.88	9.197	17
	6265	63	6.858	7.344	10.118	7.216	7.131	10.184	6.857	6.894	9.886	-3.76	-4.02	-0.88	9.304	17
UNII5 106T	6105	31	4.155	4.647	7.418	3.968	3.857	6.923	4.104	3.886	7.006	-3.76	-4.02	-0.88	6.538	17
	6265	63	4.009	4.055	7.042	3.799	4.301	7.067	3.886	4.176	7.044	-3.76	-4.02	-0.88	6.187	17
UNII5 242T	6105	31	3.906	3.648	6.789	3.792	3.447	6.633	3.470	3.236	6.364	-3.76	-4.02	-0.88	5.909	17
	6265	63	3.652	3.560	6.616	3.783	3.720	6.761	3.190	3.526	6.371	-3.76	-4.02	-0.88	5.881	17
UNII5 484T	6105	31	0.885	0.444	3.680	-	-	-	0.582	0.211	3.411	-3.76	-4.02	-0.88	2.800	17
	6265	63	0.765	0.727	3.756	-	-	-	0.660	0.658	3.669	-3.76	-4.02	-0.88	2.876	17
UNII5 996T	6105	31	-	-	-	-2.054	-2.394	0.790	-	-	-	-3.76	-4.02	-0.88	-0.090	17
	6265	63	-	-	-	-2.329	-1.967	0.866	-	-	-	-3.76	-4.02	-0.88	-0.014	17

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 26T	6105	31	9.650	9.829	12.751	9.280	9.734	12.523	8.588	8.334	11.473	-3.76	-4.02	-0.88	11.871	17
	6265	63	9.400	9.194	12.309	9.358	9.315	12.347	8.597	9.323	11.986	-3.76	-4.02	-0.88	11.467	17
UNII5 52T	6105	31	7.224	7.053	10.150	6.807	6.777	9.802	6.175	6.370	9.284	-3.76	-4.02	-0.88	9.270	17
	6265	63	6.560	7.002	9.797	6.288	7.596	10.001	6.106	6.440	9.287	-3.76	-4.02	-0.88	9.121	17
UNII5 106T	6105	31	3.987	4.032	7.020	3.694	3.880	6.798	3.353	3.561	6.468	-3.76	-4.02	-0.88	6.140	17
	6265	63	3.707	4.013	6.873	4.137	4.242	7.200	3.499	3.885	6.706	-3.76	-4.02	-0.88	6.320	17
UNII5 242T	6105	31	3.358	3.123	6.252	3.332	3.303	6.327	3.241	2.903	6.085	-3.76	-4.02	-0.88	5.447	17
	6265	63	2.987	3.772	6.407	3.243	3.700	6.487	3.069	3.580	6.342	-3.76	-4.02	-0.88	5.607	17
UNII5 484T	6105	31	0.762	0.507	3.647	-	-	-	0.785	0.492	3.651	-3.76	-4.02	-0.88	2.771	17
	6265	63	0.743	1.036	3.902	-	-	-	0.442	0.731	3.599	-3.76	-4.02	-0.88	3.022	17
UNII5 996T	6105	31	-	-	-	-2.276	-2.201	0.772	-	-	-	-3.76	-4.02	-0.88	-0.108	17
	6265	63	-	-	-	-2.257	-1.895	0.938	-	-	-	-3.76	-4.02	-0.88	0.058	17

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 26T	6105	31	9.173	9.179	12.186	8.872	9.134	12.015	8.472	8.677	11.586	-3.76	-4.02	-0.88	11.306	17
	6265	63	8.860	8.618	11.751	9.206	9.153	12.190	9.098	8.673	11.901	-3.76	-4.02	-0.88	11.310	17
UNII5 52T	6105	31	6.666	6.355	9.524	6.029	6.598	9.333	6.226	6.300	9.274	-3.76	-4.02	-0.88	8.644	17
	6265	63	6.260	6.563	9.425	6.185	6.537	9.375	6.450	6.339	9.405	-3.76	-4.02	-0.88	8.545	17
UNII5 106T	6105	31	3.442	3.677	6.571	3.098	3.407	6.265	3.039	3.540	6.307	-3.76	-4.02	-0.88	5.691	17
	6265	63	3.573	3.875	6.737	3.300	3.699	6.514	3.329	3.526	6.439	-3.76	-4.02	-0.88	5.857	17
UNII5 242T	6105	31	3.003	3.179	6.102	2.693	2.601	5.657	2.591	2.888	5.752	-3.76	-4.02	-0.88	5.222	17
	6265	63	3.069	2.973	6.031	2.911	3.346	6.144	2.838	3.164	6.014	-3.76	-4.02	-0.88	5.264	17
UNII5 484T	6105	31	-0.070	-0.145	2.903	-	-	-	-0.140	-0.185	2.848	-3.76	-4.02	-0.88	2.023	17
	6265	63	-0.038	0.270	3.129	-	-	-	0.156	0.315	3.246	-3.76	-4.02	-0.88	2.366	17
UNII5 996T	6105	31	-	-	-	-3.417	-3.248	-0.321	-	-	-	-3.76	-4.02	-0.88	-1.201	17
	6265	63	-	-	-	-3.132	-2.617	0.144	-	-	-	-3.76	-4.02	-0.88	-0.736	17

Mode : EHT320(160L/U) 2x996T

Model: UNII5(160L)/U/2X556

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 160L	6105	31	-	-	-	-4.433	-5.000	-1.697	-	-	-	-3.76	-4.02	-0.88	-2.577	17
	6265	63	-	-	-	-4.604	-4.489	-1.536	-	-	-	-3.76	-4.02	-0.88	-2.416	17
UNII5 160U	6105	31	-	-	-	-3.775	-4.077	-0.913	-	-	-	-3.76	-4.02	-0.88	-1.793	17
	6265	63	-	-	-	-4.190	-3.759	-0.959	-	-	-	-3.76	-4.02	-0.88	-1.839	17

Mode : EHT320

MODE : EHT520

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 4x996T	6105	31	-	-	-	-6.832	-7.202	-4.003	-	-	-	-3.76	-4.02	-0.88	-4.883	17
	6265	63	-	-	-	-7.203	-6.520	-3.838	-	-	-	-3.76	-4.02	-0.88	-4.718	17
UNII5 SU	6105	31	-	-	-	-6.745	-7.085	-3.902	-	-	-	-3.76	-4.02	-0.88	-4.782	17
	6265	63	-	-	-	-7.195	-6.869	-4.019	-	-	-	-3.76	-4.02	-0.88	-4.899	17

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-4.002	-4.117	-1.048	-	-	-	-3.76	-4.02	-0.88	-1.928	17
	6175	45	-	-	-	4.159	4.324	7.253	-	-	-	-3.76	-4.02	-0.88	6.373	17
	6415	93	-	-	-	3.904	4.798	7.385	-	-	-	-3.76	-4.02	-0.88	6.505	17
UNII7	6535	117	-	-	-	3.934	4.413	7.191	-	-	-	-5.82	-5.08	-2.43	4.761	17
	6695	149	-	-	-	4.208	4.153	7.191	-	-	-	-5.82	-5.08	-2.43	4.761	17
	6855	181	-	-	-	4.764	4.460	7.625	-	-	-	-5.82	-5.08	-2.43	5.195	17

Mode : EHT20 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.722	-3.758	-0.730	-3.896	-3.985	-0.930	-3.730	-3.624	-0.666	-3.76	-4.02	-0.88	-1.546	17
	6175	45	6.221	6.620	9.435	6.259	6.543	9.414	6.172	6.313	9.253	-3.76	-4.02	-0.88	8.555	17
	6415	93	5.386	6.475	8.975	5.253	6.684	9.037	5.475	6.574	9.069	-3.76	-4.02	-0.88	8.189	17
UNII7	6535	117	5.480	5.991	8.753	5.279	5.955	8.640	5.373	6.012	8.715	-5.82	-5.08	-2.43	6.323	17
	6695	149	5.841	5.677	8.770	5.844	5.438	8.656	5.686	5.577	8.642	-5.82	-5.08	-2.43	6.340	17
	6855	181	6.195	5.832	9.028	6.479	5.641	9.090	6.249	5.851	9.065	-5.82	-5.08	-2.43	6.660	17

Mode : EHT20 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-4.162	-4.404	-1.271	-	-	-	-4.295	-4.041	-1.155	-3.76	-4.02	-0.88	-2.035	17
	6165	43	4.622	4.569	7.606	-	-	-	4.154	4.227	7.201	-3.76	-4.02	-0.88	6.726	17
	6405	91	3.410	4.380	6.933	-	-	-	3.806	4.287	7.064	-3.76	-4.02	-0.88	6.184	17
UNII7	6565	123	3.298	3.793	6.563	-	-	-	3.330	3.864	6.616	-5.82	-5.08	-2.43	4.186	17
	6685	147	3.869	3.271	6.591	-	-	-	3.635	3.709	6.683	-5.82	-5.08	-2.43	4.253	17
	6845	179	4.282	3.645	6.986	-	-	-	4.039	3.524	6.800	-5.82	-5.08	-2.43	4.556	17

Mode : EHT40 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	6.861	6.535	9.711	6.520	6.361	9.451	6.561	6.491	9.536	-3.76	-4.02	-0.88	8.831	17
	6165	43	6.495	6.837	9.679	6.636	6.753	9.705	6.589	6.649	9.629	-3.76	-4.02	-0.88	8.825	17
	6405	91	5.680	6.454	9.094	5.714	6.366	9.062	5.853	6.465	9.180	-3.76	-4.02	-0.88	8.300	17
UNII7	6565	123	6.017	5.785	8.913	5.862	5.502	8.696	6.086	5.481	8.804	-5.82	-5.08	-2.43	6.483	17
	6685	147	5.780	5.621	8.711	5.655	5.543	8.609	5.647	5.657	8.662	-5.82	-5.08	-2.43	6.281	17
	6845	179	6.402	5.625	9.041	6.081	5.876	8.990	6.425	5.823	9.145	-5.82	-5.08	-2.43	6.715	17

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	4.423	4.621	7.533	4.202	4.139	7.181	4.468	4.256	7.373	-3.76	-4.02	-0.88	6.653	17
	6165	43	4.565	4.478	7.532	4.297	4.406	7.362	4.170	4.349	7.271	-3.76	-4.02	-0.88	6.652	17
	6405	91	3.638	4.362	7.025	3.268	3.989	6.654	3.445	4.466	6.996	-3.76	-4.02	-0.88	6.145	17
UNII7	6565	123	3.655	3.437	6.557	3.443	3.075	6.273	3.617	3.101	6.377	-5.82	-5.08	-2.43	4.127	17
	6685	147	3.497	3.661	6.590	3.432	3.257	6.355	3.599	3.525	6.572	-5.82	-5.08	-2.43	4.160	17
	6845	179	4.333	3.551	6.970	4.305	3.264	6.826	4.084	3.716	6.914	-5.82	-5.08	-2.43	4.540	17

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	6.748	6.202	9.494	6.756	6.418	9.601	6.675	6.388	9.544	-3.76	-4.02	-0.88	8.721	17
	6145	39	6.557	6.759	9.670	6.541	6.629	9.596	6.517	6.777	9.660	-3.76	-4.02	-0.88	8.790	17
	6385	87	5.849	6.540	9.219	5.612	6.268	8.963	5.471	6.383	8.961	-3.76	-4.02	-0.88	8.339	17
UNII7	6625	135	5.908	5.665	8.799	6.185	5.499	8.866	6.222	5.721	8.989	-5.82	-5.08	-2.43	6.559	17
	6705	151	5.887	5.486	8.702	5.739	5.325	8.547	5.898	5.745	8.833	-5.82	-5.08	-2.43	6.403	17
	6785	167	6.095	5.441	8.791	5.929	5.490	8.726	6.091	5.515	8.823	-5.82	-5.08	-2.43	6.393	17

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	4.834	4.342	7.605	4.315	4.095	7.216	4.413	4.255	7.345	-3.76	-4.02	-0.88	6.725	17
	6145	39	4.454	4.240	7.358	4.331	4.565	7.460	4.400	4.454	7.437	-3.76	-4.02	-0.88	6.580	17
	6385	87	3.501	4.784	7.200	3.249	4.037	6.671	3.321	3.972	6.669	-3.76	-4.02	-0.88	6.320	17
UNII7	6625	135	3.823	3.199	6.532	3.633	3.488	6.571	3.866	3.539	6.716	-5.82	-5.08	-2.43	4.286	17
	6705	151	3.761	3.190	6.495	3.545	3.594	6.580	3.921	3.298	6.631	-5.82	-5.08	-2.43	4.201	17
	6785	167	3.849	3.301	6.594	3.757	3.102	6.452	3.610	3.364	6.499	-5.82	-5.08	-2.43	4.164	17

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	0.316	0.113	3.226	0.383	0.238	3.321	0.180	0.073	3.137	-3.76	-4.02	-0.88	2.441	17
	6145	39	0.376	0.130	3.265	0.359	0.110	3.246	0.330	0.127	3.240	-3.76	-4.02	-0.88	2.385	17
	6385	87	-0.231	0.312	3.059	-0.224	0.426	3.123	-0.176	0.548	3.211	-3.76	-4.02	-0.88	2.331	17
UNII7	6625	135	0.464	0.069	3.281	0.136	-0.107	3.026	-0.174	-0.099	2.873	-5.82	-5.08	-2.43	0.851	17
	6705	151	-0.172	0.051	2.951	-0.116	-0.245	2.830	-0.124	-0.094	2.901	-5.82	-5.08	-2.43	0.521	17
	6785	167	0.052	0.052	3.062	0.145	-0.372	2.904	0.071	-0.226	2.935	-5.82	-5.08	-2.43	0.632	17

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	6.362	5.873	9.134	5.687	5.641	8.674	5.512	5.580	8.556	-3.76	-4.02	-0.88	8.254	17
	6185	47	5.961	5.966	8.974	5.519	6.010	8.782	5.734	5.742	8.748	-3.76	-4.02	-0.88	8.094	17
	6345	79	5.054	5.899	8.507	5.208	6.069	8.670	5.225	6.030	8.656	-3.76	-4.02	-0.88	7.790	17
UNII7	6665	143	4.995	4.300	7.671	4.917	4.328	7.643	5.110	4.645	7.894	-5.82	-5.08	-2.43	5.464	17

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	3.824	3.888	6.867	3.567	3.710	6.650	3.384	3.409	6.407	-3.76	-4.02	-0.88	5.987	17
	6185	47	3.884	3.868	6.887	3.682	3.678	6.691	3.462	3.269	6.377	-3.76	-4.02	-0.88	6.007	17
	6345	79	2.875	3.748	6.344	3.137	3.362	6.262	2.925	3.569	6.270	-3.76	-4.02	-0.88	5.464	17
UNII7	6665	143	2.945	1.874	5.453	2.778	2.432	5.619	3.002	2.444	5.743	-5.82	-5.08	-2.43	3.313	17

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-0.476	-0.619	2.463	-0.302	-0.620	2.552	-0.244	-0.380	2.699	-3.76	-4.02	-0.88	1.819	17
	6185	47	-0.518	-1.061	2.229	-0.484	-0.980	2.285	-0.384	-0.609	2.515	-3.76	-4.02	-0.88	1.635	17
	6345	79	-0.516	-0.269	2.619	-0.255	-0.196	2.785	-0.584	-0.279	2.581	-3.76	-4.02	-0.88	1.905	17
UNII7	6665	143	-0.803	-0.887	2.165	-0.840	-0.745	2.218	-0.595	-1.472	1.999	-5.82	-5.08	-2.43	-0.212	17

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	5.323	5.366	8.355	5.379	5.135	8.269	4.783	4.901	7.852	-3.76	-4.02	-0.88	7.475	17
	6185	47	5.172	5.608	8.406	5.356	5.222	8.300	5.200	5.256	8.238	-3.76	-4.02	-0.88	7.526	17
	6345	79	5.084	5.562	8.340	5.209	5.298	8.264	4.678	4.993	7.848	-3.76	-4.02	-0.88	7.460	17
UNII7	6665	143	5.001	4.718	7.872	5.084	4.658	7.886	4.921	4.532	7.741	-5.82	-5.08	-2.43	5.456	17

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.276	3.404	6.351	3.265	3.122	6.205	3.014	2.902	5.969	-3.76	-4.02	-0.88	5.471	17
	6185	47	3.217	3.046	6.143	3.322	3.538	6.442	2.700	3.119	5.925	-3.76	-4.02	-0.88	5.562	17
	6345	79	2.887	4.010	6.495	2.902	3.357	6.146	2.560	3.318	5.966	-3.76	-4.02	-0.88	5.615	17
UNII7	6665	143	2.835	2.249	5.563	2.696	2.125	5.431	2.759	2.535	5.659	-5.82	-5.08	-2.43	3.229	17

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-0.884	-1.049	2.044	-0.315	-0.946	2.391	-0.680	-1.045	2.151	-3.76	-4.02	-0.88	1.511	17
	6185	47	-0.758	-1.039	2.114	-1.076	-1.026	1.959	-0.993	-1.055	1.986	-3.76	-4.02	-0.88	1.234	17
	6345	79	-0.744	-0.269	2.510	-0.442	-0.326	2.626	-0.941	-0.271	2.417	-3.76	-4.02	-0.88	1.746	17
UNII7	6665	143	-0.569	-1.248	2.115	-0.755	-0.956	2.156	-0.825	-1.155	2.023	-5.82	-5.08	-2.43	-0.274	17

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.624	-3.873	-0.737	-3.135	-3.221	-0.168	-3.379	-3.737	-0.544	-3.76	-4.02	-0.88	-1.048	17
	6185	47	-3.736	-4.357	-1.025	-3.660	-4.040	-0.836	-3.599	-4.022	-0.795	-3.76	-4.02	-0.88	-1.675	17
	6345	79	-3.711	-3.097	-0.383	-3.642	-3.050	-0.326	-3.543	-3.309	-0.415	-3.76	-4.02	-0.88	-1.206	17
UNII7	6665	143	-3.734	-4.325	-1.010	-3.546	-4.195	-0.848	-3.532	-4.265	-0.873	-5.82	-5.08	-2.43	-3.278	17

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.168	-4.083	-1.115	-4.035	-4.016	-1.015	-4.062	-4.106	-1.074	-3.76	-4.02	-0.88	-1.895	17
	6185	47	-4.596	-4.681	-1.628	-4.346	-4.818	-1.565	-4.368	-4.577	-1.461	-3.76	-4.02	-0.88	-2.341	17
	6345	79	-4.352	-3.990	-1.157	-4.416	-4.002	-1.194	-4.396	-3.959	-1.162	-3.76	-4.02	-0.88	-2.037	17
UNII7	6665	143	-4.285	-5.004	-1.619	-4.391	-4.857	-1.607	-4.545	-4.723	-1.623	-5.82	-5.08	-2.43	-4.037	17

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	6.090	5.676	8.898	5.423	5.335	8.389	5.573	5.478	8.536	-3.76	-4.02	-0.88	8.018	17
	6265	63	5.998	5.540	8.785	5.929	5.976	8.963	5.464	5.726	8.607	-3.76	-4.02	-0.88	8.083	17
UNII5 106T+26T	6105	31	3.990	3.668	6.842	4.055	3.816	6.947	4.097	3.198	6.681	-3.76	-4.02	-0.88	6.067	17
	6265	63	4.002	3.723	6.875	3.839	3.602	6.732	3.548	3.543	6.556	-3.76	-4.02	-0.88	5.995	17
UNII5 484T+242T	6105	31	-0.388	-1.083	2.288	-0.118	-0.773	2.577	-0.470	-0.850	2.354	-3.76	-4.02	-0.88	1.697	17
	6265	63	-0.167	-0.443	2.707	-0.445	-0.749	2.416	-0.567	-0.733	2.361	-3.76	-4.02	-0.88	1.827	17

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	5.712	5.120	8.436	5.789	5.814	8.812	5.906	5.311	8.629	-3.76	-4.02	-0.88	7.932	17
	6265	63	5.356	5.300	8.338	5.793	5.506	8.662	5.365	5.380	8.383	-3.76	-4.02	-0.88	7.782	17
UNII5 106T+26T	6105	31	3.724	3.394	6.572	3.752	3.586	6.680	3.338	3.453	6.406	-3.76	-4.02	-0.88	5.800	17
	6265	63	3.411	3.110	6.273	3.270	3.369	6.330	3.341	3.289	6.325	-3.76	-4.02	-0.88	5.450	17
UNII5 484T+242T	6105	31	-0.416	-1.238	2.202	-0.278	-1.135	2.325	-0.369	-0.568	2.543	-3.76	-4.02	-0.88	1.663	17
	6265	63	-0.836	-0.584	2.302	-0.612	-0.669	2.370	-0.691	-0.601	2.364	-3.76	-4.02	-0.88	1.490	17

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	5.536	4.866	8.224	4.984	5.012	8.008	4.789	4.772	7.791	-3.76	-4.02	-0.88	7.344	17
	6265	63	5.342	5.186	8.275	4.747	5.048	7.910	4.645	4.934	7.802	-3.76	-4.02	-0.88	7.395	17
UNII5 106T+26T	6105	31	3.314	3.272	6.303	3.325	3.106	6.227	2.922	2.996	5.969	-3.76	-4.02	-0.88	5.423	17
	6265	63	3.075	3.385	6.243	2.797	2.849	5.833	3.044	3.220	6.143	-3.76	-4.02	-0.88	5.363	17
UNII5 484T+242T	6105	31	-0.332	-0.881	2.412	-0.392	-0.387	2.621	-0.863	-0.925	2.116	-3.76	-4.02	-0.88	1.741	17
	6265	63	-0.921	-0.949	2.075	-0.504	-0.352	2.583	-0.889	-0.560	2.289	-3.76	-4.02	-0.88	1.703	17

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	4.773	4.765	7.779	4.281	5.139	7.741	4.053	4.584	7.337	-3.76	-4.02	-0.88	6.899	17
	6265	63	5.009	5.224	8.128	4.542	5.034	7.805	4.946	4.857	7.912	-3.76	-4.02	-0.88	7.248	17
UNII5 106T+26T	6105	31	2.839	2.623	5.742	2.560	2.787	5.685	2.529	2.637	5.593	-3.76	-4.02	-0.88	4.862	17
	6265	63	2.638	2.681	5.670	2.833	2.583	5.720	2.554	2.636	5.605	-3.76	-4.02	-0.88	4.840	17
UNII5 484T+242T	6105	31	-1.562	-1.889	1.288	-1.624	-1.676	1.360	-1.635	-1.736	1.325	-3.76	-4.02	-0.88	0.480	17
	6265	63	-1.310	-1.731	1.495	-1.457	-1.495	1.534	-1.241	-1.355	1.712	-3.76	-4.02	-0.88	0.832	17

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-3.085	-3.704	-0.373	-3.119	-3.714	-0.396	-3.511	-4.055	-0.764	-3.76	-4.02	-0.88	-1.253	17
160L	6265	63	-3.483	-3.320	-0.390	-3.230	-3.410	-0.309	-3.597	-3.732	-0.654	-3.76	-4.02	-0.88	-1.189	17
UNII5	6105	31	-4.028	-4.199	-1.102	-3.154	-3.400	-0.265	-3.137	-3.618	-0.360	-3.76	-4.02	-0.88	-1.145	17
160U	6265	63	-4.074	-3.963	-1.008	-3.314	-3.265	-0.279	-3.742	-3.554	-0.637	-3.76	-4.02	-0.88	-1.159	17

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 3x996T	6105	31	-6.174	-6.326	-3.239	-6.024	-6.516	-3.253	-6.413	-6.791	-3.588	-3.76	-4.02	-0.88	-4.119	17
	6265	63	-6.159	-6.184	-3.161	-6.105	-5.988	-3.036	-6.236	-6.079	-3.147	-3.76	-4.02	-0.88	-3.916	17
UNII5 2x996T+484T	6105	31	-5.452	-5.923	-2.671	-5.279	-5.766	-2.506	-5.554	-5.483	-2.509	-3.76	-4.02	-0.88	-3.386	17
	6265	63	-5.426	-5.512	-2.459	-5.555	-5.241	-2.385	-5.532	-5.276	-2.392	-3.76	-4.02	-0.88	-3.265	17
UNII5 3x996T+484T	6105	31	-6.899	-7.182	-4.028	-7.022	-7.073	-4.037	-6.854	-7.195	-4.011	-3.76	-4.02	-0.88	-4.891	17
	6265	63	-6.870	-6.796	-3.822	-6.946	-6.641	-3.780	-6.966	-6.681	-3.811	-3.76	-4.02	-0.88	-4.660	17

10.4.3 Very Low Power Device

Very Low Power Device Limit : -5 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-9.088	-7.003	-4.911	-10.903	-8.015	-6.213	-9.240	-7.403	-5.215	-3.76	-4.02	-0.88	-5.791	-5
	6175	45	-9.870	-6.938	-5.151	-11.762	-8.192	-6.610	-10.328	-6.797	-5.203	-3.76	-4.02	-0.88	-6.031	-5
	6415	93	-10.742	-7.864	-6.059	-11.823	-9.143	-7.269	-10.557	-7.820	-5.966	-3.76	-4.02	-0.88	-6.846	-5
UNII7	6535	117	-10.496	-7.239	-5.559	-11.746	-8.828	-7.036	-10.242	-7.425	-5.599	-5.82	-5.08	-2.43	-7.989	-5
	6695	149	-10.995	-7.831	-6.121	-12.602	-8.728	-7.236	-11.089	-7.655	-6.031	-5.82	-5.08	-2.43	-8.461	-5
	6855	181	-10.860	-7.250	-5.680	-12.444	-8.915	-7.320	-11.096	-7.349	-5.820	-5.82	-5.08	-2.43	-8.110	-5

Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-9.281	-6.917	-4.930	-9.396	-7.090	-5.081	-9.257	-6.637	-4.742	-3.76	-4.02	-0.88	-5.622	-5
	6175	45	-9.956	-6.452	-4.850	-10.372	-7.070	-5.404	-10.015	-6.784	-5.095	-3.76	-4.02	-0.88	-5.730	-5
	6415	93	-10.469	-7.582	-5.780	-10.958	-7.908	-6.160	-10.279	-7.677	-5.776	-3.76	-4.02	-0.88	-6.656	-5
UNII7	6535	117	-10.272	-6.956	-5.295	-10.558	-7.377	-5.672	-10.184	-7.258	-5.469	-5.82	-5.08	-2.43	-7.725	-5
	6695	149	-10.755	-7.351	-5.717	-10.796	-7.761	-6.008	-10.810	-7.155	-5.599	-5.82	-5.08	-2.43	-8.029	-5
	6855	181	-10.597	-6.947	-5.389	-10.994	-7.033	-5.567	-10.900	-7.078	-5.571	-5.82	-5.08	-2.43	-7.819	-5

Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-7.371	-7.869	-4.602	-	-	-	-7.503	-7.836	-4.656	-3.76	-4.02	-0.88	-5.482	-5
	6175	45	-7.365	-7.478	-4.411	-	-	-	-7.432	-7.800	-4.602	-3.76	-4.02	-0.88	-5.291	-5
	6415	93	-8.308	-6.737	-4.441	-	-	-	-8.241	-6.953	-4.539	-3.76	-4.02	-0.88	-5.321	-5
UNII7	6535	117	-7.905	-7.217	-4.537	-	-	-	-7.807	-7.142	-4.451	-5.82	-5.08	-2.43	-6.881	-5
	6695	149	-7.252	-7.653	-4.437	-	-	-	-7.143	-7.726	-4.414	-5.82	-5.08	-2.43	-6.844	-5
	6855	181	-6.583	-6.559	-3.561	-	-	-	-6.728	-6.532	-3.618	-5.82	-5.08	-2.43	-5.991	-5

Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-7.637	-7.794	-4.704	-	-	-	-3.76	-4.02	-0.88	-5.584	-5
	6175	45	-	-	-	-7.295	-7.365	-4.319	-	-	-	-3.76	-4.02	-0.88	-5.199	-5
	6415	93	-	-	-	-7.856	-7.244	-4.529	-	-	-	-3.76	-4.02	-0.88	-5.409	-5
UNII7	6535	117	-	-	-	-6.119	-5.418	-2.744	-	-	-	-5.82	-5.08	-2.43	-5.174	-5
	6695	149	-	-	-	-5.467	-5.943	-2.688	-	-	-	-5.82	-5.08	-2.43	-5.118	-5
	6855	181	-	-	-	-5.516	-6.284	-2.873	-	-	-	-5.82	-5.08	-2.43	-5.303	-5

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-7.124	-7.736	-4.409	-	-	-	-3.76	-4.02	-0.88	-5.289	-5
	6175	45	-	-	-	-7.330	-7.584	-4.445	-	-	-	-3.76	-4.02	-0.88	-5.325	-5
	6415	93	-	-	-	-7.845	-7.121	-4.458	-	-	-	-3.76	-4.02	-0.88	-5.338	-5
UNII7	6535	117	-	-	-	-6.418	-5.872	-3.126	-	-	-	-5.82	-5.08	-2.43	-5.556	-5
	6695	149	-	-	-	-5.708	-6.420	-3.039	-	-	-	-5.82	-5.08	-2.43	-5.469	-5
	6855	181	-	-	-	-5.458	-6.265	-2.832	-	-	-	-5.82	-5.08	-2.43	-5.262	-5

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-9.306	-7.065	-5.032	-9.791	-6.899	-5.098	-9.624	-6.965	-5.084	-3.76	-4.02	-0.88	-5.912	-5
	6165	43	-9.468	-6.852	-4.955	-9.762	-6.857	-5.061	-10.293	-6.640	-5.083	-3.76	-4.02	-0.88	-5.835	-5
	6405	91	-10.644	-7.660	-5.890	-10.731	-7.802	-6.014	-10.488	-7.863	-5.970	-3.76	-4.02	-0.88	-6.770	-5
UNII7	6565	123	-10.258	-7.174	-5.437	-10.140	-7.654	-5.711	-10.055	-7.923	-5.849	-5.82	-5.08	-2.43	-7.867	-5
	6685	147	-11.197	-8.183	-6.423	-11.222	-8.674	-6.753	-11.334	-8.180	-6.466	-5.82	-5.08	-2.43	-8.853	-5
	6845	179	-10.266	-7.271	-5.505	-11.111	-7.118	-5.660	-10.512	-7.326	-5.623	-5.82	-5.08	-2.43	-7.935	-5

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-8.940	-6.749	-4.697	-9.506	-6.885	-4.990	-9.437	-6.501	-4.715	-3.76	-4.02	-0.88	-5.577	-5
	6165	43	-9.594	-6.523	-4.782	-9.629	-6.554	-4.814	-10.022	-6.537	-4.929	-3.76	-4.02	-0.88	-5.662	-5
	6405	91	-10.886	-7.572	-5.910	-10.667	-7.595	-5.854	-10.501	-7.599	-5.802	-3.76	-4.02	-0.88	-6.682	-5
UNII7	6565	123	-10.153	-7.368	-5.531	-9.788	-7.467	-5.464	-9.857	-7.635	-5.595	-5.82	-5.08	-2.43	-7.894	-5
	6685	147	-11.050	-7.908	-6.190	-11.173	-8.046	-6.324	-11.278	-7.758	-6.160	-5.82	-5.08	-2.43	-8.590	-5
	6845	179	-10.300	-6.950	-5.299	-10.608	-7.104	-5.501	-10.991	-6.874	-5.451	-5.82	-5.08	-2.43	-7.729	-5

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.063	-7.427	-4.231	-7.009	-7.637	-4.302	-7.189	-7.464	-4.314	-3.76	-4.02	-0.88	-5.111	-5
	6165	43	-7.019	-7.401	-4.196	-7.254	-7.544	-4.386	-7.312	-7.580	-4.434	-3.76	-4.02	-0.88	-5.076	-5
	6405	91	-8.195	-7.293	-4.711	-8.282	-7.616	-4.926	-7.824	-7.340	-4.565	-3.76	-4.02	-0.88	-5.445	-5
UNII7	6565	123	-7.436	-7.375	-4.395	-7.519	-7.551	-4.525	-7.272	-7.636	-4.440	-5.82	-5.08	-2.43	-6.825	-5
	6685	147	-7.324	-7.522	-4.412	-7.398	-7.881	-4.623	-7.406	-7.437	-4.411	-5.82	-5.08	-2.43	-6.841	-5
	6845	179	-6.678	-6.883	-3.769	-6.648	-6.576	-3.602	-6.810	-6.383	-3.581	-5.82	-5.08	-2.43	-6.011	-5

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-7.733	-7.695	-4.704	-	-	-	-7.937	-7.951	-4.934	-3.76	-4.02	-0.88	-5.584	-5
	6165	43	-7.681	-7.378	-4.516	-	-	-	-7.990	-7.679	-4.821	-3.76	-4.02	-0.88	-5.396	-5
	6405	91	-7.900	-7.286	-4.572	-	-	-	-7.832	-7.242	-4.517	-3.76	-4.02	-0.88	-5.397	-5
UNII7	6565	123	-5.660	-5.735	-2.687	-	-	-	-5.703	-5.565	-2.623	-5.82	-5.08	-2.43	-5.053	-5
	6685	147	-5.680	-5.759	-2.709	-	-	-	-5.633	-6.006	-2.805	-5.82	-5.08	-2.43	-5.139	-5
	6845	179	-5.370	-6.424	-2.855	-	-	-	-5.709	-6.254	-2.963	-5.82	-5.08	-2.43	-5.285	-5

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-6.920	-7.639	-4.254	-	-	-	-3.76	-4.02	-0.88	-5.134	-5
	6165	43	-	-	-	-7.298	-7.519	-4.397	-	-	-	-3.76	-4.02	-0.88	-5.277	-5
	6405	91	-	-	-	-8.146	-7.241	-4.660	-	-	-	-3.76	-4.02	-0.88	-5.540	-5
UNII7	6565	123	-	-	-	-6.205	-6.792	-3.478	-	-	-	-5.82	-5.08	-2.43	-5.908	-5
	6685	147	-	-	-	-6.540	-6.755	-3.636	-	-	-	-5.82	-5.08	-2.43	-6.066	-5
	6845	179	-	-	-	-5.758	-6.016	-2.875	-	-	-	-5.82	-5.08	-2.43	-5.305	-5

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-7.563	-8.043	-4.786	-	-	-	-3.76	-4.02	-0.88	-5.666	-5
	6165	43	-	-	-	-7.333	-7.165	-4.238	-	-	-	-3.76	-4.02	-0.88	-5.118	-5
	6405	91	-	-	-	-7.888	-7.264	-4.554	-	-	-	-3.76	-4.02	-0.88	-5.434	-5
UNII7	6565	123	-	-	-	-6.768	-7.149	-3.944	-	-	-	-5.82	-5.08	-2.43	-6.374	-5
	6685	147	-	-	-	-6.875	-7.146	-3.998	-	-	-	-5.82	-5.08	-2.43	-6.428	-5
	6845	179	-	-	-	-6.320	-6.565	-3.430	-	-	-	-5.82	-5.08	-2.43	-5.860	-5

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-9.352	-7.486	-5.309	-10.095	-7.266	-5.443	-10.010	-6.659	-5.008	-3.76	-4.02	-0.88	-5.888	-5
	6145	39	-9.978	-6.976	-5.212	-10.171	-7.029	-5.311	-10.398	-6.981	-5.351	-3.76	-4.02	-0.88	-6.092	-5
	6385	87	-11.254	-7.920	-6.264	-11.486	-8.084	-6.449	-10.770	-8.138	-6.247	-3.76	-4.02	-0.88	-7.127	-5
UNII7	6625	135	-10.165	-6.948	-5.255	-10.316	-6.884	-5.259	-10.057	-6.826	-5.137	-5.82	-5.08	-2.43	-7.567	-5
	6705	151	-11.473	-8.613	-6.801	-11.452	-8.696	-6.848	-12.265	-7.846	-6.505	-5.82	-5.08	-2.43	-8.935	-5
	6785	167	-10.920	-7.818	-6.087	-11.115	-7.391	-5.855	-11.767	-7.446	-6.079	-5.82	-5.08	-2.43	-8.285	-5

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-9.411	-7.023	-5.044	-9.781	-7.010	-5.168	-10.034	-6.571	-4.956	-3.76	-4.02	-0.88	-5.836	-5
	6145	39	-9.075	-6.893	-4.838	-10.072	-6.733	-5.079	-10.362	-6.651	-5.111	-3.76	-4.02	-0.88	-5.718	-5
	6385	87	-11.094	-7.237	-5.740	-11.119	-7.682	-6.058	-10.878	-7.847	-6.093	-3.76	-4.02	-0.88	-6.620	-5
UNII7	6625	135	-10.052	-6.385	-4.832	-10.028	-6.334	-4.789	-9.620	-6.227	-4.590	-5.82	-5.08	-2.43	-7.020	-5
	6705	151	-11.225	-8.165	-6.420	-11.386	-8.357	-6.602	-11.322	-7.575	-6.046	-5.82	-5.08	-2.43	-8.476	-5
	6785	167	-10.729	-7.023	-5.482	-10.794	-7.063	-5.529	-11.065	-7.139	-5.662	-5.82	-5.08	-2.43	-7.912	-5

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-7.188	-7.526	-4.344	-7.076	-7.689	-4.362	-6.820	-7.659	-4.209	-3.76	-4.02	-0.88	-5.089	-5
	6145	39	-6.965	-7.553	-4.239	-7.103	-7.594	-4.331	-7.245	-7.475	-4.348	-3.76	-4.02	-0.88	-5.119	-5
	6385	87	-7.782	-6.842	-4.277	-7.357	-7.134	-4.234	-7.582	-6.790	-4.158	-3.76	-4.02	-0.88	-5.038	-5
UNII7	6625	135	-7.058	-7.554	-4.289	-6.940	-7.580	-4.238	-7.164	-7.275	-4.209	-5.82	-5.08	-2.43	-6.639	-5
	6705	151	-7.344	-8.016	-4.657	-7.476	-7.892	-4.669	-7.580	-7.689	-4.624	-5.82	-5.08	-2.43	-7.054	-5
	6785	167	-7.126	-7.746	-4.415	-7.175	-7.987	-4.552	-7.624	-7.294	-4.446	-5.82	-5.08	-2.43	-6.845	-5

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-7.802	-7.590	-4.684	-7.686	-7.915	-4.789	-7.599	-7.844	-4.709	-3.76	-4.02	-0.88	-5.564	-5
	6145	39	-7.128	-7.602	-4.348	-7.796	-7.472	-4.621	-7.813	-7.513	-4.650	-3.76	-4.02	-0.88	-5.228	-5
	6385	87	-7.581	-6.941	-4.239	-7.764	-7.314	-4.523	-7.597	-7.385	-4.479	-3.76	-4.02	-0.88	-5.119	-5
UNII7	6625	135	-5.986	-6.582	-3.263	-5.976	-6.760	-3.340	-5.998	-6.252	-3.113	-5.82	-5.08	-2.43	-5.543	-5
	6705	151	-5.415	-6.076	-2.723	-5.334	-6.105	-2.692	-5.601	-5.907	-2.741	-5.82	-5.08	-2.43	-5.122	-5
	6785	167	-5.686	-6.485	-3.057	-5.795	-6.554	-3.148	-5.927	-6.435	-3.163	-5.82	-5.08	-2.43	-5.487	-5

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-7.078	-7.851	-4.437	-	-	-	-7.050	-7.740	-4.371	-3.76	-4.02	-0.88	-5.251	-5
	6145	39	-7.586	-7.533	-4.549	-	-	-	-7.849	-7.527	-4.675	-3.76	-4.02	-0.88	-5.429	-5
	6385	87	-8.171	-7.285	-4.695	-	-	-	-7.845	-7.513	-4.666	-3.76	-4.02	-0.88	-5.546	-5
UNII7	6625	135	-5.995	-6.787	-3.363	-	-	-	-6.304	-6.435	-3.359	-5.82	-5.08	-2.43	-5.789	-5
	6705	151	-6.267	-6.613	-3.426	-	-	-	-6.518	-6.530	-3.514	-5.82	-5.08	-2.43	-5.856	-5
	6785	167	-6.178	-6.600	-3.374	-	-	-	-6.083	-6.622	-3.334	-5.82	-5.08	-2.43	-5.764	-5

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-7.006	-7.653	-4.307	-	-	-	-3.76	-4.02	-0.88	-5.187	-5
	6145	39	-	-	-	-7.638	-7.576	-4.597	-	-	-	-3.76	-4.02	-0.88	-5.477	-5
	6385	87	-	-	-	-8.157	-7.276	-4.684	-	-	-	-3.76	-4.02	-0.88	-5.564	-5
UNII7	6625	135	-	-	-	-6.257	-6.684	-3.455	-	-	-	-5.82	-5.08	-2.43	-5.885	-5
	6705	151	-	-	-	-6.404	-6.545	-3.464	-	-	-	-5.82	-5.08	-2.43	-5.894	-5
	6785	167	-	-	-	-6.322	-6.666	-3.480	-	-	-	-5.82	-5.08	-2.43	-5.910	-5

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-7.113	-7.808	-4.436	-	-	-	-3.76	-4.02	-0.88	-5.316	-5
	6145	39	-	-	-	-7.441	-7.687	-4.552	-	-	-	-3.76	-4.02	-0.88	-5.432	-5
	6385	87	-	-	-	-7.775	-7.097	-4.412	-	-	-	-3.76	-4.02	-0.88	-5.292	-5
UNII7	6625	135	-	-	-	-6.528	-6.831	-3.666	-	-	-	-5.82	-5.08	-2.43	-6.096	-5
	6705	151	-	-	-	-6.661	-6.826	-3.732	-	-	-	-5.82	-5.08	-2.43	-6.162	-5
	6785	167	-	-	-	-6.608	-6.977	-3.778	-	-	-	-5.82	-5.08	-2.43	-6.208	-5

Mode : EHT160(80L) 26T

Model: UN100(S2)/201

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid		RU Index : High								
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-10.314	-9.106	-6.657	-10.570	-8.903	-6.646	-11.126	-8.346	-6.507	-3.76	-4.02	-0.88	-7.387	-5
	6185	47	-10.783	-9.044	-6.816	-10.944	-8.164	-6.325	-11.306	-8.863	-6.904	-3.76	-4.02	-0.88	-7.205	-5
	6345	79	-11.639	-8.693	-6.910	-11.740	-8.803	-7.017	-11.440	-8.806	-6.916	-3.76	-4.02	-0.88	-7.790	-5
UNII7	6665	143	-11.755	-8.219	-6.626	-11.069	-7.501	-5.918	-10.787	-7.523	-5.845	-5.82	-5.08	-2.43	-8.275	-5

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-10.397	-8.838	-6.537	-10.304	-8.024	-6.005	-10.580	-7.950	-6.058	-3.76	-4.02	-0.88	-6.885	-5
	6185	47	-10.712	-8.252	-6.299	-10.646	-7.983	-6.103	-11.198	-8.274	-6.484	-3.76	-4.02	-0.88	-6.983	-5
	6345	79	-11.797	-8.488	-6.824	-11.500	-8.490	-6.729	-11.554	-8.348	-6.651	-3.76	-4.02	-0.88	-7.531	-5
UNII7	6665	143	-11.041	-7.368	-5.817	-10.883	-7.412	-5.799	-10.674	-7.118	-5.531	-5.82	-5.08	-2.43	-7.961	-5

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.035	-8.509	-5.255	-7.966	-8.582	-5.253	-8.266	-9.046	-5.628	-3.76	-4.02	-0.88	-6.133	-5
	6185	47	-7.860	-8.243	-5.037	-7.872	-8.354	-5.096	-8.244	-8.468	-5.344	-3.76	-4.02	-0.88	-5.917	-5
	6345	79	-8.064	-7.551	-4.790	-8.048	-7.594	-4.805	-8.256	-7.459	-4.829	-3.76	-4.02	-0.88	-5.670	-5
UNII7	6665	143	-7.987	-8.969	-5.440	-8.186	-8.573	-5.365	-8.185	-8.569	-5.362	-5.82	-5.08	-2.43	-7.792	-5

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.249	-8.018	-5.122	-8.653	-8.160	-5.390	-8.692	-8.062	-5.356	-3.76	-4.02	-0.88	-6.002	-5
	6185	47	-8.260	-8.181	-5.210	-8.239	-7.807	-5.008	-8.729	-8.210	-5.452	-3.76	-4.02	-0.88	-5.888	-5
	6345	79	-7.208	-7.152	-4.170	-7.784	-7.231	-4.489	-7.733	-7.268	-4.484	-3.76	-4.02	-0.88	-5.050	-5
UNII7	6665	143	-6.315	-7.048	-3.656	-6.220	-7.109	-3.632	-6.008	-6.833	-3.391	-5.82	-5.08	-2.43	-5.821	-5

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.439	-8.651	-5.534	-	-	-	-8.788	-8.472	-5.617	-3.76	-4.02	-0.88	-6.414	-5
	6185	47	-8.608	-8.215	-5.397	-	-	-	-8.711	-8.164	-5.419	-3.76	-4.02	-0.88	-6.277	-5
	6345	79	-7.852	-7.414	-4.617	-	-	-	-7.803	-7.227	-4.495	-3.76	-4.02	-0.88	-5.375	-5
UNII7	6665	143	-6.944	-7.368	-4.141	-	-	-	-7.174	-7.408	-4.279	-5.82	-5.08	-2.43	-6.571	-5

Mode : EHT160(80L) 996T

Mode : LNI100(80L) 9901

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid		RU Index : High								
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-8.028	-7.911	-4.959	-	-	-	-3.76	-4.02	-0.88	-5.839	-5
	6185	47	-	-	-	-8.012	-7.665	-4.825	-	-	-	-3.76	-4.02	-0.88	-5.705	-5
	6345	79	-	-	-	-7.576	-7.040	-4.289	-	-	-	-3.76	-4.02	-0.88	-5.169	-5
UNII7	6665	143	-	-	-	-7.313	-7.921	-4.596	-	-	-	-5.82	-5.08	-2.43	-7.026	-5

Mode : EHT160(80U) 26T

Mode: LTH100(000)/201																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-11.206	-8.140	-6.397	-11.625	-7.895	-6.361	-12.446	-8.492	-7.023	-3.76	-4.02	-0.88	-7.241	-5
	6185	47	-11.282	-8.352	-6.564	-11.812	-8.166	-6.606	-12.326	-9.727	-7.824	-3.76	-4.02	-0.88	-7.444	-5
	6345	79	-11.537	-8.231	-6.566	-11.519	-9.122	-7.146	-11.262	-9.359	-7.196	-3.76	-4.02	-0.88	-7.446	-5
UNII7	6665	143	-10.825	-8.239	-6.332	-11.200	-7.390	-5.879	-11.478	-7.614	-6.119	-5.82	-5.08	-2.43	-8.309	-5

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-10.654	-7.980	-6.104	-11.249	-7.864	-6.224	-11.419	-8.326	-6.592	-3.76	-4.02	-0.88	-6.984	-5
	6185	47	-11.373	-7.964	-6.332	-11.882	-7.892	-6.433	-12.026	-8.601	-6.974	-3.76	-4.02	-0.88	-7.212	-5
	6345	79	-11.376	-8.374	-6.610	-11.157	-9.215	-7.068	-11.734	-9.317	-7.349	-3.76	-4.02	-0.88	-7.490	-5
UNII7	6665	143	-10.897	-6.974	-5.496	-10.908	-6.980	-5.504	-11.209	-7.319	-5.832	-5.82	-5.08	-2.43	-7.926	-5

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.487	-8.624	-5.545	-8.642	-9.108	-5.858	-9.094	-9.274	-6.173	-3.76	-4.02	-0.88	-6.425	-5
	6185	47	-7.835	-7.878	-4.846	-8.048	-8.099	-5.063	-8.300	-8.225	-5.252	-3.76	-4.02	-0.88	-5.726	-5
	6345	79	-8.238	-7.830	-5.019	-8.308	-7.695	-4.980	-7.978	-8.054	-5.005	-3.76	-4.02	-0.88	-5.860	-5
UNII7	6665	143	-8.092	-8.408	-5.237	-8.511	-8.774	-5.630	-8.389	-8.541	-5.454	-5.82	-5.08	-2.43	-7.667	-5

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.186	-8.305	-5.713	-9.139	-8.475	-5.784	-9.222	-8.680	-5.933	-3.76	-4.02	-0.88	-6.593	-5
	6185	47	-8.867	-8.355	-5.594	-8.951	-8.237	-5.569	-9.174	-8.265	-5.686	-3.76	-4.02	-0.88	-6.449	-5
	6345	79	-7.691	-7.566	-4.618	-7.672	-7.672	-4.662	-8.011	-7.652	-4.818	-3.76	-4.02	-0.88	-5.498	-5
UNII7	6665	143	-6.368	-6.894	-3.613	-6.444	-6.969	-3.689	-6.522	-6.633	-3.567	-5.82	-5.08	-2.43	-5.997	-5

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.394	-8.061	-5.214	-	-	-	-8.661	-7.997	-5.306	-3.76	-4.02	-0.88	-6.094	-5
	6185	47	-8.123	-8.242	-5.172	-	-	-	-8.358	-8.124	-5.229	-3.76	-4.02	-0.88	-6.052	-5
	6345	79	-7.895	-7.656	-4.764	-	-	-	-7.705	-7.404	-4.542	-3.76	-4.02	-0.88	-5.422	-5
UNII7	6665	143	-6.970	-7.575	-4.252	-	-	-	-7.273	-7.589	-4.418	-5.82	-5.08	-2.43	-6.682	-5

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-8.399	-7.867	-5.114	-	-	-	-3.76	-4.02	-0.88	-5.994	-5
	6185	47	-	-	-	-8.413	-7.809	-5.090	-	-	-	-3.76	-4.02	-0.88	-5.970	-5
	6345	79	-	-	-	-7.434	-7.372	-4.392	-	-	-	-3.76	-4.02	-0.88	-5.272	-5
UNII7	6665	143	-	-	-	-7.083	-7.792	-4.413	-	-	-	-5.82	-5.08	-2.43	-6.843	-5

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-10.335	-10.736	-7.520	-	-	-	-3.76	-4.02	-0.88	-8.400	-5
	6185	47	-	-	-	-10.094	-10.224	-7.148	-	-	-	-3.76	-4.02	-0.88	-8.028	-5
	6345	79	-	-	-	-10.624	-9.905	-7.239	-	-	-	-3.76	-4.02	-0.88	-8.119	-5
UNII7	6665	143	-	-	-	-10.499	-11.209	-7.829	-	-	-	-5.82	-5.08	-2.43	-10.259	-5

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-10.086	-10.090	-7.078	-	-	-	-3.76	-4.02	-0.88	-7.958	-5
	6185	47	-	-	-	-9.736	-9.439	-6.575	-	-	-	-3.76	-4.02	-0.88	-7.455	-5
	6345	79	-	-	-	-10.095	-9.502	-6.779	-	-	-	-3.76	-4.02	-0.88	-7.659	-5
UNII7	6665	143	-	-	-	-9.920	-10.519	-7.199	-	-	-	-5.82	-5.08	-2.43	-9.629	-5

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-10.491	-9.701	-7.068	-10.379	-8.172	-6.126	-10.308	-7.945	-5.957	-3.76	-4.02	-0.88	-6.837	-5
	6265	63	-10.909	-9.228	-6.977	-9.900	-8.296	-6.014	-10.448	-8.168	-6.150	-3.76	-4.02	-0.88	-6.894	-5
UNII5 52T	6105	31	-9.907	-8.877	-6.351	-9.559	-8.392	-5.926	-9.399	-7.708	-5.461	-3.76	-4.02	-0.88	-6.341	-5
	6265	63	-9.525	-8.541	-5.995	-9.733	-7.157	-5.246	-9.951	-7.980	-5.844	-3.76	-4.02	-0.88	-6.126	-5
UNII5 106T	6105	31	-8.161	-8.643	-5.385	-8.422	-8.706	-5.552	-7.952	-8.998	-5.433	-3.76	-4.02	-0.88	-6.265	-5
	6265	63	-8.136	-7.616	-4.858	-8.005	-7.966	-4.975	-8.236	-8.079	-5.147	-3.76	-4.02	-0.88	-5.738	-5
UNII5 242T	6105	31	-7.954	-8.134	-5.033	-8.222	-7.944	-5.071	-8.182	-8.235	-5.199	-3.76	-4.02	-0.88	-5.913	-5
	6265	63	-8.767	-8.363	-5.550	-8.548	-8.440	-5.484	-8.908	-8.591	-5.737	-3.76	-4.02	-0.88	-6.364	-5
UNII5 484T	6105	31	-8.202	-8.956	-5.553	-	-	-	-8.515	-8.763	-5.627	-3.76	-4.02	-0.88	-6.433	-5
	6265	63	-8.122	-8.516	-5.304	-	-	-	-8.312	-8.260	-5.276	-3.76	-4.02	-0.88	-6.156	-5
UNII5 996T	6105	31	-	-	-	-7.577	-7.922	-4.736	-	-	-	-3.76	-4.02	-0.88	-5.616	-5
	6265	63	-	-	-	-7.693	-7.337	-4.501	-	-	-	-3.76	-4.02	-0.88	-5.381	-5

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-11.769	-10.426	-8.035	-11.726	-9.220	-7.284	-10.923	-8.315	-6.416	-3.76	-4.02	-0.88	-7.296	-5
	6265	63	-12.670	-9.984	-8.112	-11.833	-8.642	-6.940	-11.547	-8.415	-6.694	-3.76	-4.02	-0.88	-7.574	-5
UNII5 52T	6105	31	-11.316	-9.395	-7.240	-10.962	-8.760	-6.713	-10.532	-7.889	-6.002	-3.76	-4.02	-0.88	-6.882	-5
	6265	63	-11.924	-9.437	-7.494	-11.269	-8.835	-6.873	-11.081	-7.851	-6.162	-3.76	-4.02	-0.88	-7.042	-5
UNII5 106T	6105	31	-8.394	-8.469	-5.421	-8.099	-8.772	-5.412	-8.398	-8.447	-5.412	-3.76	-4.02	-0.88	-6.292	-5
	6265	63	-7.996	-7.931	-4.953	-8.589	-7.891	-5.216	-8.547	-8.124	-5.320	-3.76	-4.02	-0.88	-5.833	-5
UNII5 242T	6105	31	-7.458	-7.447	-4.443	-7.608	-7.961	-4.771	-8.083	-7.859	-4.960	-3.76	-4.02	-0.88	-5.323	-5
	6265	63	-7.576	-7.911	-4.730	-7.620	-7.688	-4.644	-7.915	-7.647	-4.769	-3.76	-4.02	-0.88	-5.524	-5
UNII5 484T	6105	31	-7.811	-8.382	-5.077	-	-	-	-7.963	-8.351	-5.143	-3.76	-4.02	-0.88	-5.957	-5
	6265	63	-7.242	-7.695	-4.452	-	-	-	-7.697	-7.206	-4.434	-3.76	-4.02	-0.88	-5.314	-5
UNII5 996T	6105	31	-	-	-	-7.845	-7.532	-4.675	-	-	-	-3.76	-4.02	-0.88	-5.555	-5
	6265	63	-	-	-	-7.473	-7.207	-4.328	-	-	-	-3.76	-4.02	-0.88	-5.208	-5

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-11.697	-8.475	-6.783	-12.386	-8.880	-7.278	-13.169	-9.794	-8.151	-3.76	-4.02	-0.88	-7.663	-5
	6265	63	-10.814	-8.173	-6.285	-12.914	-9.223	-7.677	-13.268	-10.201	-8.459	-3.76	-4.02	-0.88	-7.165	-5
UNII5 52T	6105	31	-10.670	-7.918	-6.069	-11.720	-8.555	-6.845	-12.836	-9.587	-7.904	-3.76	-4.02	-0.88	-6.949	-5
	6265	63	-11.343	-8.248	-6.515	-11.883	-8.932	-7.151	-12.921	-9.804	-8.078	-3.76	-4.02	-0.88	-7.395	-5
UNII5 106T	6105	31	-7.992	-8.144	-5.057	-7.982	-8.239	-5.098	-8.843	-8.839	-5.831	-3.76	-4.02	-0.88	-5.937	-5
	6265	63	-8.340	-7.538	-4.910	-8.336	-7.641	-4.964	-8.544	-7.896	-5.198	-3.76	-4.02	-0.88	-5.790	-5
UNII5 242T	6105	31	-8.591	-7.605	-5.060	-8.041	-8.099	-5.060	-8.522	-8.193	-5.345	-3.76	-4.02	-0.88	-5.940	-5
	6265	63	-7.759	-8.128	-4.930	-8.247	-8.026	-5.125	-8.291	-8.062	-5.165	-3.76	-4.02	-0.88	-5.810	-5
UNII5 484T	6105	31	-7.690	-7.596	-4.633	-	-	-	-7.829	-7.306	-4.549	-3.76	-4.02	-0.88	-5.429	-5
	6265	63	-7.707	-7.486	-4.585	-	-	-	-7.914	-7.900	-4.897	-3.76	-4.02	-0.88	-5.465	-5
UNII5 996T	6105	31	-	-	-	-7.422	-7.345	-4.373	-	-	-	-3.76	-4.02	-0.88	-5.253	-5
	6265	63	-	-	-	-7.872	-7.182	-4.503	-	-	-	-3.76	-4.02	-0.88	-5.383	-5

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	-12.036	-7.666	-6.313	-11.772	-8.153	-6.585	-12.737	-9.130	-7.559	-3.76	-4.02	-0.88	-7.193	-5
	6265	63	-11.092	-8.503	-6.597	-11.308	-9.391	-7.234	-11.528	-10.180	-7.791	-3.76	-4.02	-0.88	-7.477	-5
UNII5 52T	6105	31	-10.907	-7.864	-6.114	-11.403	-7.070	-5.707	-11.803	-8.640	-6.929	-3.76	-4.02	-0.88	-6.587	-5
	6265	63	-10.921	-8.099	-6.274	-10.961	-8.400	-6.484	-11.048	-9.409	-7.141	-3.76	-4.02	-0.88	-7.154	-5
UNII5 106T	6105	31	-8.454	-8.674	-5.552	-8.590	-8.778	-5.673	-8.887	-9.289	-6.073	-3.76	-4.02	-0.88	-6.432	-5
	6265	63	-8.136	-7.797	-4.953	-8.397	-8.175	-5.274	-8.512	-8.013	-5.245	-3.76	-4.02	-0.88	-5.833	-5
UNII5 242T	6105	31	-8.740	-8.543	-5.631	-9.069	-8.388	-5.705	-9.031	-8.450	-5.721	-3.76	-4.02	-0.88	-6.511	-5
	6265	63	-8.165	-8.351	-5.247	-8.496	-8.433	-5.455	-8.294	-8.467	-5.370	-3.76	-4.02	-0.88	-6.127	-5
UNII5 484T	6105	31	-7.672	-7.313	-4.479	-	-	-	-7.673	-7.693	-4.673	-3.76	-4.02	-0.88	-5.359	-5
	6265	63	-7.818	-7.567	-4.681	-	-	-	-7.714	-7.896	-4.794	-3.76	-4.02	-0.88	-5.561	-5
UNII5 996T	6105	31	-	-	-	-8.031	-7.440	-4.715	-	-	-	-3.76	-4.02	-0.88	-5.595	-5
	6265	63	-	-	-	-7.747	-7.495	-4.609	-	-	-	-3.76	-4.02	-0.88	-5.489	-5

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 160L	6105	31	-	-	-	-9.483	-9.641	-6.551	-	-	-	-3.76	-4.02	-0.88	-7.431	-5
	6265	63	-	-	-	-9.114	-8.878	-5.984	-	-	-	-3.76	-4.02	-0.88	-6.864	-5
UNII5 160U	6105	31	-	-	-	-9.436	-8.789	-6.090	-	-	-	-3.76	-4.02	-0.88	-6.970	-5
	6265	63	-	-	-	-9.144	-8.764	-5.940	-	-	-	-3.76	-4.02	-0.88	-6.820	-5

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 4x996T	6105	31	-	-	-	-11.602	-11.948	-8.762	-	-	-	-3.76	-4.02	-0.88	-9.642	-5
	6265	63	-	-	-	-11.990	-11.831	-8.900	-	-	-	-3.76	-4.02	-0.88	-9.780	-5
UNII5 SU	6105	31	-	-	-	-11.444	-11.788	-8.603	-	-	-	-3.76	-4.02	-0.88	-9.483	-5
	6265	63	-	-	-	-11.812	-11.493	-8.640	-	-	-	-3.76	-4.02	-0.88	-9.520	-5

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-7.286	-7.685	-4.470	-	-	-	-3.76	-4.02	-0.88	-5.350	-5
	6175	45	-	-	-	-7.877	-7.615	-4.733	-	-	-	-3.76	-4.02	-0.88	-5.613	-5
	6415	93	-	-	-	-7.804	-7.118	-4.437	-	-	-	-3.76	-4.02	-0.88	-5.317	-5
UNII7	6535	117	-	-	-	-6.328	-6.322	-3.314	-	-	-	-5.82	-5.08	-2.43	-5.744	-5
	6695	149	-	-	-	-6.065	-6.607	-3.317	-	-	-	-5.82	-5.08	-2.43	-5.747	-5
	6855	181	-	-	-	-5.362	-6.157	-2.731	-	-	-	-5.82	-5.08	-2.43	-5.161	-5

Mode : EHT20 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-11.197	-8.512	-6.640	-11.230	-8.937	-6.924	-11.194	-8.703	-6.762	-3.76	-4.02	-0.88	-7.520	-5
	6175	45	-11.848	-8.392	-6.775	-11.800	-8.586	-6.892	-11.845	-8.602	-6.917	-3.76	-4.02	-0.88	-7.655	-5
	6415	93	-12.514	-9.169	-7.517	-12.417	-9.399	-7.641	-12.353	-9.257	-7.525	-3.76	-4.02	-0.88	-8.397	-5
UNII7	6535	117	-11.992	-8.886	-7.157	-11.847	-9.154	-7.285	-11.963	-9.075	-7.273	-5.82	-5.08	-2.43	-9.587	-5
	6695	149	-12.829	-9.294	-7.701	-12.793	-9.428	-7.782	-12.564	-9.179	-7.539	-5.82	-5.08	-2.43	-9.969	-5
	6855	181	-12.564	-8.719	-7.219	-12.647	-8.759	-7.271	-12.887	-8.911	-7.449	-5.82	-5.08	-2.43	-9.649	-5

Mode : EHT20 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-8.392	-8.570	-5.469	-	-	-	-8.432	-8.775	-5.589	-3.76	-4.02	-0.88	-6.349	-5
	6175	45	-8.294	-8.325	-5.299	-	-	-	-8.408	-8.216	-5.300	-3.76	-4.02	-0.88	-6.179	-5
	6415	93	-9.135	-7.467	-5.211	-	-	-	-9.171	-7.719	-5.374	-3.76	-4.02	-0.88	-6.091	-5
UNII7	6535	117	-8.847	-7.825	-5.295	-	-	-	-8.814	-8.089	-5.426	-5.82	-5.08	-2.43	-7.725	-5
	6695	149	-8.095	-8.722	-5.387	-	-	-	-8.155	-8.610	-5.366	-5.82	-5.08	-2.43	-7.796	-5
	6855	181	-7.585	-7.523	-4.543	-	-	-	-7.550	-7.268	-4.396	-5.82	-5.08	-2.43	-6.826	-5

Mode : EHT40 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-10.967	-8.350	-6.454	-11.050	-8.493	-6.576	-11.146	-8.248	-6.450	-3.76	-4.02	-0.88	-7.330	-5
	6165	43	-11.113	-8.025	-6.290	-10.981	-7.920	-6.176	-11.449	-8.044	-6.411	-3.76	-4.02	-0.88	-7.056	-5
	6405	91	-12.254	-9.181	-7.441	-12.318	-9.343	-7.570	-12.151	-9.315	-7.495	-3.76	-4.02	-0.88	-8.321	-5
UNII7	6565	123	-11.719	-8.945	-7.104	-11.734	-9.059	-7.184	-11.704	-9.218	-7.275	-5.82	-5.08	-2.43	-9.534	-5
	6685	147	-12.575	-9.514	-7.770	-12.819	-9.797	-8.040	-12.816	-9.319	-7.715	-5.82	-5.08	-2.43	-10.145	-5
	6845	179	-12.083	-8.490	-6.915	-12.098	-8.559	-6.967	-12.209	-8.827	-7.187	-5.82	-5.08	-2.43	-9.345	-5

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-8.101	-8.259	-5.169	-8.136	-8.634	-5.368	-7.906	-8.626	-5.241	-3.76	-4.02	-0.88	-6.049	-5
	6165	43	-7.980	-8.254	-5.105	-8.145	-8.452	-5.286	-8.412	-8.579	-5.485	-3.76	-4.02	-0.88	-5.985	-5
	6405	91	-9.044	-8.197	-5.590	-9.205	-8.357	-5.750	-9.057	-8.244	-5.621	-3.76	-4.02	-0.88	-6.470	-5
UNII7	6565	123	-8.381	-8.442	-5.401	-8.293	-8.681	-5.473	-8.267	-8.468	-5.356	-5.82	-5.08	-2.43	-7.786	-5
	6685	147	-8.305	-8.567	-5.424	-8.501	-8.839	-5.657	-8.325	-8.402	-5.353	-5.82	-5.08	-2.43	-7.783	-5
	6845	179	-7.381	-7.673	-4.514	-7.806	-7.740	-4.763	-7.766	-7.361	-4.549	-5.82	-5.08	-2.43	-6.944	-5

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-10.986	-8.750	-6.715	-11.416	-8.726	-6.855	-11.441	-8.320	-6.595	-3.76	-4.02	-0.88	-7.475	-5
	6145	39	-11.139	-8.727	-6.757	-11.541	-8.517	-6.760	-11.684	-8.117	-6.534	-3.76	-4.02	-0.88	-7.414	-5
	6385	87	-12.423	-8.902	-7.304	-12.719	-9.530	-7.828	-12.295	-9.725	-7.812	-3.76	-4.02	-0.88	-8.184	-5
UNII7	6625	135	-12.287	-8.695	-7.119	-12.024	-8.519	-6.917	-11.779	-8.194	-6.616	-5.82	-5.08	-2.43	-9.046	-5
	6705	151	-12.899	-9.537	-7.890	-13.002	-9.597	-7.963	-13.281	-9.623	-8.067	-5.82	-5.08	-2.43	-10.320	-5
	6785	167	-12.370	-9.008	-7.361	-12.464	-9.062	-7.428	-13.051	-8.647	-7.303	-5.82	-5.08	-2.43	-9.733	-5

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-7.932	-8.294	-5.099	-8.252	-8.657	-5.440	-8.101	-8.771	-5.413	-3.76	-4.02	-0.88	-5.979	-5
	6145	39	-8.030	-8.194	-5.101	-8.161	-8.243	-5.192	-8.331	-8.662	-5.483	-3.76	-4.02	-0.88	-5.981	-5
	6385	87	-8.396	-7.526	-4.929	-8.565	-8.103	-5.318	-8.354	-8.036	-5.182	-3.76	-4.02	-0.88	-5.809	-5
UNII7	6625	135	-8.203	-8.458	-5.319	-8.287	-8.281	-5.274	-8.133	-8.256	-5.184	-5.82	-5.08	-2.43	-7.614	-5
	6705	151	-8.489	-8.615	-5.541	-8.296	-8.696	-5.481	-8.365	-8.243	-5.293	-5.82	-5.08	-2.43	-7.723	-5
	6785	167	-8.076	-8.827	-5.425	-8.267	-8.815	-5.522	-8.518	-8.404	-5.451	-5.82	-5.08	-2.43	-7.855	-5

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-9.116	-9.782	-6.426	-8.981	-9.800	-6.361	-9.202	-9.632	-6.402	-3.76	-4.02	-0.88	-7.241	-5
	6145	39	-9.459	-9.284	-6.361	-9.477	-9.296	-6.376	-9.386	-9.301	-6.333	-3.76	-4.02	-0.88	-7.213	-5
	6385	87	-9.732	-8.930	-6.303	-9.766	-9.040	-6.378	-9.523	-9.152	-6.324	-3.76	-4.02	-0.88	-7.183	-5
UNII7	6625	135	-7.524	-8.213	-4.845	-7.953	-8.217	-5.073	-8.023	-8.304	-5.151	-5.82	-5.08	-2.43	-7.275	-5
	6705	151	-7.934	-8.265	-5.087	-8.158	-8.366	-5.251	-8.111	-8.252	-5.171	-5.82	-5.08	-2.43	-7.517	-5
	6785	167	-7.945	-8.351	-5.133	-7.921	-8.484	-5.184	-7.886	-8.521	-5.182	-5.82	-5.08	-2.43	-7.563	-5

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-12.088	-10.269	-8.074	-11.977	-9.815	-7.753	-11.922	-9.568	-7.577	-3.76	-4.02	-0.88	-8.457	-5
	6185	47	-12.554	-10.123	-8.160	-12.311	-9.612	-7.745	-12.374	-9.554	-7.729	-3.76	-4.02	-0.88	-8.609	-5
	6345	79	-12.839	-9.970	-8.162	-12.796	-9.936	-8.125	-12.754	-9.885	-8.077	-3.76	-4.02	-0.88	-8.957	-5
UNII7	6665	143	-12.846	-9.391	-7.774	-12.202	-9.102	-7.371	-12.502	-8.605	-7.120	-5.82	-5.08	-2.43	-9.550	-5

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.727	-9.546	-6.107	-8.850	-9.932	-6.347	-9.280	-10.083	-6.652	-3.76	-4.02	-0.88	-6.987	-5
	6185	47	-8.583	-9.270	-5.902	-8.983	-9.237	-6.097	-9.384	-9.530	-6.446	-3.76	-4.02	-0.88	-6.782	-5
	6345	79	-8.847	-8.712	-5.768	-8.788	-8.406	-5.582	-9.098	-8.442	-5.747	-3.76	-4.02	-0.88	-6.462	-5
UNII7	6665	143	-9.255	-10.001	-6.601	-9.177	-9.347	-6.251	-9.237	-9.456	-6.334	-5.82	-5.08	-2.43	-8.681	-5

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-10.382	-10.312	-7.337	-10.174	-10.210	-7.182	-10.304	-10.071	-7.176	-3.76	-4.02	-0.88	-8.056	-5
	6185	47	-10.364	-9.896	-7.114	-10.254	-10.030	-7.130	-10.157	-10.179	-7.158	-3.76	-4.02	-0.88	-7.994	-5
	6345	79	-9.915	-9.940	-6.917	-9.870	-9.889	-6.869	-9.966	-9.836	-6.890	-3.76	-4.02	-0.88	-7.749	-5
UNII7	6665	143	-8.878	-9.202	-6.027	-8.826	-9.303	-6.048	-8.737	-9.272	-5.986	-5.82	-5.08	-2.43	-8.416	-5

Mode : EHT160(80U) MRU 52T+26T

Mode : EHT160(800) MKU 321+261																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-12.205	-9.270	-7.484	-12.158	-9.596	-7.681	-13.019	-9.821	-8.122	-3.76	-4.02	-0.88	-8.364	-5
	6185	47	-12.926	-9.400	-7.804	-13.156	-9.485	-7.934	-13.536	-10.257	-8.584	-3.76	-4.02	-0.88	-8.684	-5
	6345	79	-12.957	-10.030	-8.241	-12.620	-10.649	-8.514	-12.928	-11.073	-8.892	-3.76	-4.02	-0.88	-9.121	-5
UNII7	6665	143	-12.809	-9.229	-7.650	-12.723	-9.290	-7.666	-13.088	-9.094	-7.637	-5.82	-5.08	-2.43	-10.067	-5

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-9.301	-9.910	-6.584	-9.664	-9.967	-6.802	-10.072	-10.255	-7.152	-3.76	-4.02	-0.88	-7.464	-5
	6185	47	-8.894	-8.968	-5.920	-9.136	-8.964	-6.038	-9.287	-9.361	-6.313	-3.76	-4.02	-0.88	-6.800	-5
	6345	79	-9.012	-8.330	-5.647	-8.947	-8.896	-5.911	-9.210	-8.882	-6.032	-3.76	-4.02	-0.88	-6.527	-5
UNII7	6665	143	-9.041	-9.709	-6.352	-9.039	-9.534	-6.269	-9.643	-9.232	-6.422	-5.82	-5.08	-2.43	-8.699	-5

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-10.801	-10.683	-7.732	-10.549	-10.583	-7.556	-10.656	-11.038	-7.833	-3.76	-4.02	-0.88	-8.436	-5
	6185	47	-10.825	-10.359	-7.576	-10.609	-10.139	-7.358	-10.805	-10.177	-7.470	-3.76	-4.02	-0.88	-8.238	-5
	6345	79	-10.280	-10.211	-7.235	-10.119	-10.019	-7.059	-10.073	-10.183	-7.118	-3.76	-4.02	-0.88	-7.939	-5
UNII7	6665	143	-8.990	-9.341	-6.152	-8.656	-9.121	-5.872	-8.726	-9.366	-6.024	-5.82	-5.08	-2.43	-8.302	-5

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-9.840	-9.530	-6.672	-9.515	-9.357	-6.425	-9.522	-9.529	-6.516	-3.76	-4.02	-0.88	-7.305	-5
	6185	47	-9.667	-9.637	-6.642	-9.585	-9.687	-6.626	-9.730	-9.446	-6.576	-3.76	-4.02	-0.88	-7.456	-5
	6345	79	-9.704	-9.082	-6.372	-9.580	-9.407	-6.483	-9.592	-9.320	-6.444	-3.76	-4.02	-0.88	-7.252	-5
UNII7	6665	143	-8.618	-9.325	-5.947	-8.628	-9.262	-5.924	-8.789	-9.260	-6.008	-5.82	-5.08	-2.43	-8.354	-5

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	-11.523	-10.202	-7.802	-11.648	-10.108	-7.800	-11.061	-9.617	-7.269	-3.76	-4.02	-0.88	-8.149	-5
	6265	63	-11.527	-10.353	-7.890	-11.318	-9.441	-7.269	-11.635	-9.478	-7.414	-3.76	-4.02	-0.88	-8.149	-5
UNII5 106T+26T	6105	31	-8.697	-9.235	-5.948	-8.906	-9.478	-6.173	-8.845	-9.518	-6.158	-3.76	-4.02	-0.88	-6.828	-5
	6265	63	-8.658	-8.435	-5.535	-8.496	-8.434	-5.455	-9.191	-9.003	-6.086	-3.76	-4.02	-0.88	-6.335	-5
UNII5 484T+242T	6105	31	-10.279	-10.734	-7.490	-10.251	-10.820	-7.516	-10.128	-10.723	-7.405	-3.76	-4.02	-0.88	-8.285	-5
	6265	63	-10.114	-10.585	-7.333	-9.843	-10.752	-7.264	-9.612	-10.656	-7.093	-3.76	-4.02	-0.88	-7.973	-5

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	-13.033	-11.216	-9.020	-12.102	-10.404	-8.160	-12.039	-9.463	-7.553	-3.76	-4.02	-0.88	-8.433	-5
	6265	63	-13.163	-10.939	-8.900	-12.852	-10.443	-8.472	-12.717	-9.895	-8.071	-3.76	-4.02	-0.88	-8.951	-5
UNII5 106T+26T	6105	31	-8.924	-9.062	-5.982	-8.822	-9.363	-6.074	-9.261	-9.179	-6.210	-3.76	-4.02	-0.88	-6.862	-5
	6265	63	-9.169	-8.819	-5.980	-8.926	-8.540	-5.719	-9.333	-8.798	-6.047	-3.76	-4.02	-0.88	-6.599	-5
UNII5 484T+242T	6105	31	-10.059	-10.945	-7.469	-9.979	-10.759	-7.341	-9.890	-10.953	-7.379	-3.76	-4.02	-0.88	-8.221	-5
	6265	63	-10.314	-10.251	-7.272	-10.037	-10.315	-7.164	-10.152	-10.449	-7.288	-3.76	-4.02	-0.88	-8.044	-5

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	-12.036	-9.728	-7.720	-13.004	-9.649	-8.000	-14.315	-10.823	-9.217	-3.76	-4.02	-0.88	-8.600	-5
	6265	63	-12.552	-10.081	-8.133	-12.871	-10.277	-8.373	-13.748	-11.413	-9.415	-3.76	-4.02	-0.88	-9.013	-5
UNII5 106T+26T	6105	31	-8.360	-8.905	-5.614	-8.899	-9.110	-5.993	-9.041	-9.100	-6.060	-3.76	-4.02	-0.88	-6.494	-5
	6265	63	-8.745	-8.566	-5.644	-9.377	-8.700	-6.015	-9.251	-8.637	-5.923	-3.76	-4.02	-0.88	-6.524	-5
UNII5 484T+242T	6105	31	-9.526	-10.578	-7.010	-9.335	-10.234	-6.751	-9.743	-10.393	-7.046	-3.76	-4.02	-0.88	-7.631	-5
	6265	63	-9.498	-9.368	-6.422	-9.068	-9.146	-6.097	-9.530	-9.477	-6.493	-3.76	-4.02	-0.88	-6.977	-5

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	-12.496	-9.015	-7.406	-13.159	-9.134	-7.686	-13.438	-9.851	-8.274	-3.76	-4.02	-0.88	-8.286	-5
	6265	63	-12.259	-9.925	-7.927	-12.082	-10.117	-7.979	-12.075	-10.733	-8.342	-3.76	-4.02	-0.88	-8.807	-5
UNII5 106T+26T	6105	31	-9.309	-9.528	-6.407	-9.469	-9.466	-6.457	-9.582	-9.634	-6.598	-3.76	-4.02	-0.88	-7.287	-5
	6265	63	-8.811	-8.776	-5.783	-9.421	-8.860	-6.121	-9.249	-8.960	-6.092	-3.76	-4.02	-0.88	-6.663	-5
UNII5 484T+242T	6105	31	-9.992	-10.061	-7.016	-10.071	-9.964	-7.007	-9.884	-9.949	-6.906	-3.76	-4.02	-0.88	-7.786	-5
	6265	63	-9.698	-9.889	-6.782	-9.745	-9.789	-6.757	-9.773	-9.740	-6.746	-3.76	-4.02	-0.88	-7.626	-5

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 160L	6105	31	-9.265	-10.254	-6.721	-9.509	-10.024	-6.749	-9.476	-10.242	-6.832	-3.76	-4.02	-0.88	-7.601	-5
	6265	63	-9.259	-9.164	-6.201	-9.406	-9.178	-6.280	-9.592	-9.782	-6.676	-3.76	-4.02	-0.88	-7.081	-5
UNII5 160U	6105	31	-9.539	-9.529	-6.524	-8.840	-9.007	-5.912	-9.094	-9.658	-6.357	-3.76	-4.02	-0.88	-6.792	-5
	6265	63	-9.583	-9.438	-6.500	-9.060	-8.591	-5.809	-9.486	-9.214	-6.338	-3.76	-4.02	-0.88	-6.689	-5

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 3x996T	6105	31	-11.227	-11.064	-8.134	-11.158	-10.989	-8.062	-10.902	-11.520	-8.190	-3.76	-4.02	-0.88	-8.942	-5
	6265	63	-10.984	-10.723	-7.841	-10.654	-10.708	-7.671	-10.811	-10.677	-7.733	-3.76	-4.02	-0.88	-8.551	-5
UNII5 2x996T+484T	6105	31	-10.510	-10.277	-7.382	-10.641	-10.142	-7.374	-10.481	-10.125	-7.290	-3.76	-4.02	-0.88	-8.170	-5
	6265	63	-10.167	-9.566	-6.846	-9.990	-9.699	-6.832	-10.173	-9.678	-6.909	-3.76	-4.02	-0.88	-7.712	-5
UNII5 3x996T+484T	6105	31	-11.610	-11.888	-8.736	-11.882	-11.843	-8.852	-11.795	-11.755	-8.764	-3.76	-4.02	-0.88	-9.616	-5
	6265	63	-11.681	-11.113	-8.377	-11.446	-11.043	-8.229	-11.602	-11.195	-8.383	-3.76	-4.02	-0.88	-9.109	-5

Test Plots(Power Spectral Density)

[MIMO_CDD(Ant1+Ant2)]

[Indoor Cilent]



Note: In order to simplify the report, attached plots were only channel of the highest PSD.

[SRU]

Ant.1

Ant.2

802.11be EHT20 Ch.45(6175 MHz) 106 Tones RU 53

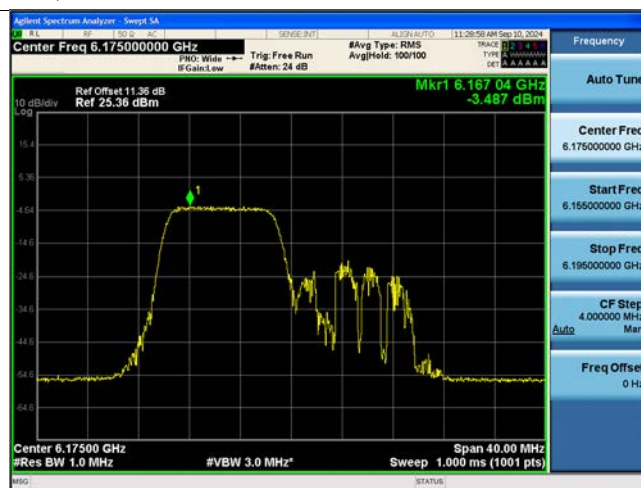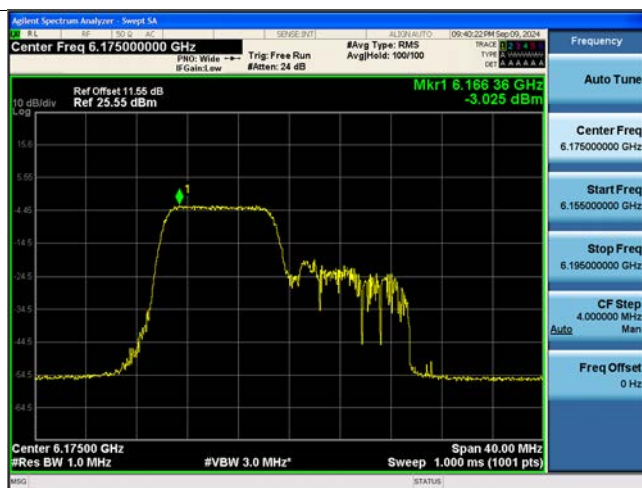


802.11be EHT40 Ch.43(6165 MHz) 106 Tones RU 53





Ant.1

Ant.2

802.11be EHT80 Ch.39(6145 MHz) 996 Tones RU 67

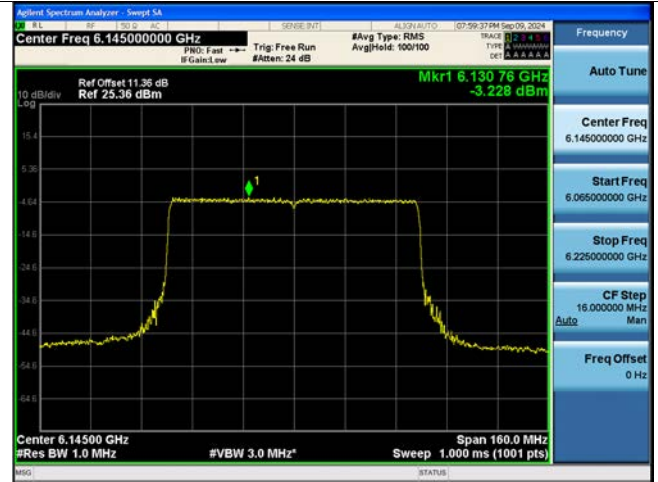



802.11be EHT160_80L Ch.79(6345 MHz) 106 Tones RU 53

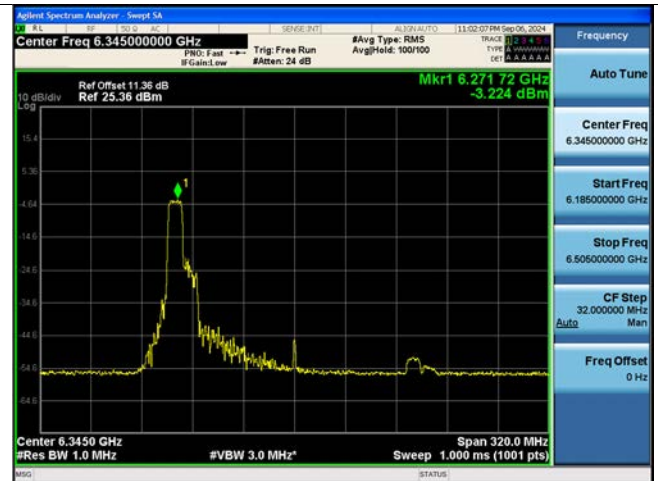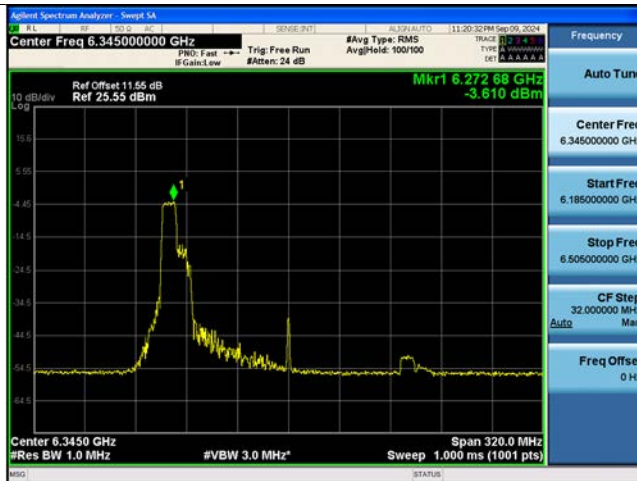


Ant.1

Ant.2

802.11be EHT320_80LL Ch.31(6105 MHz) 484 Tones RU 65

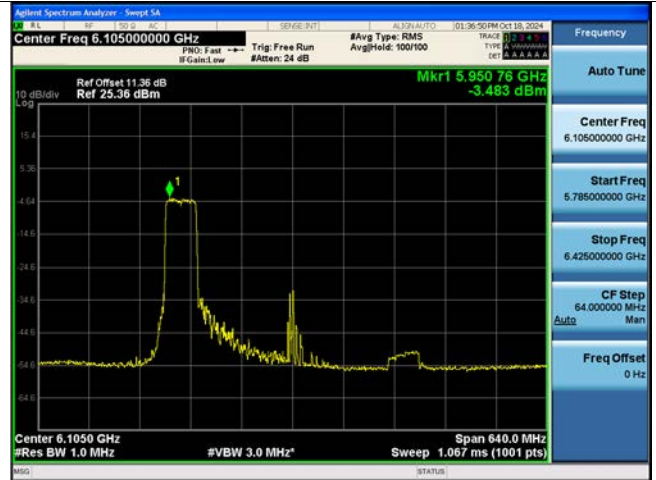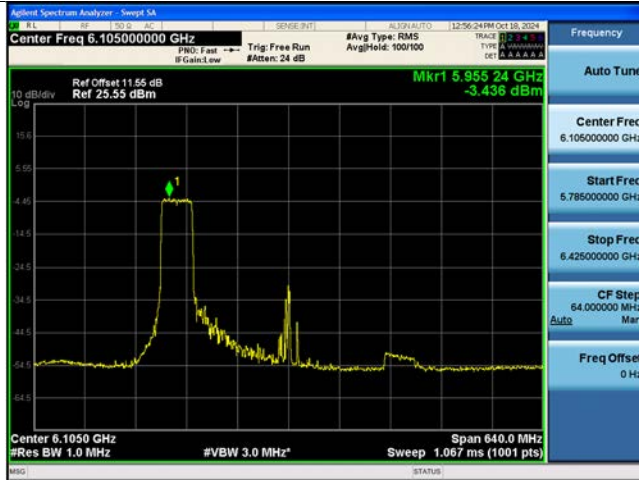

802.11a Ch.45(6175 MHz)

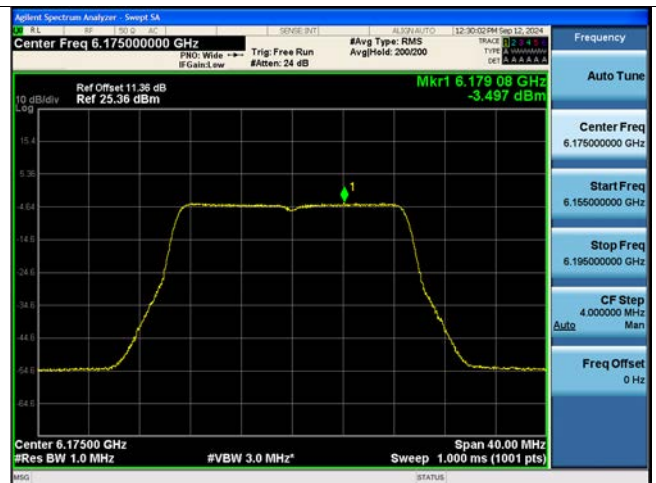



Ant.1

Ant.2

802.11be EHT20 Ch.45(6175 MHz) 106T + 26T RU 82





802.11be EHT40 Ch.43(6165 MHz) 106T + 26T RU 82

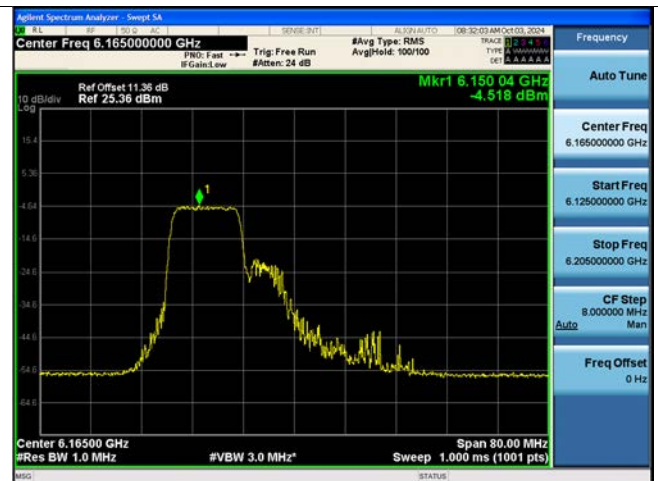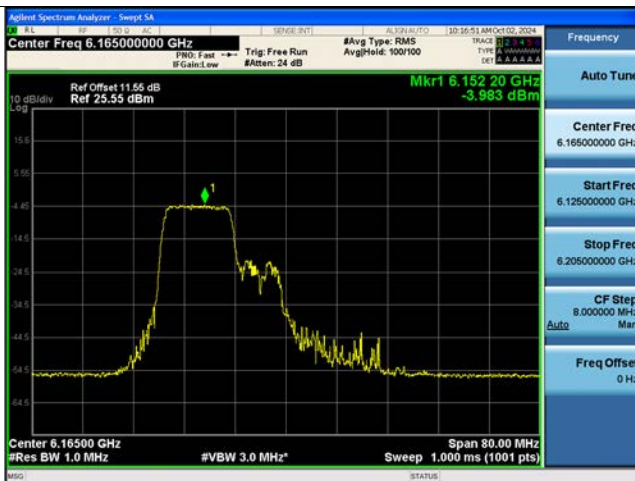



Ant.1

Ant.2

802.11be EHT80 Ch.39(6145 MHz) 106T + 26T RU 82

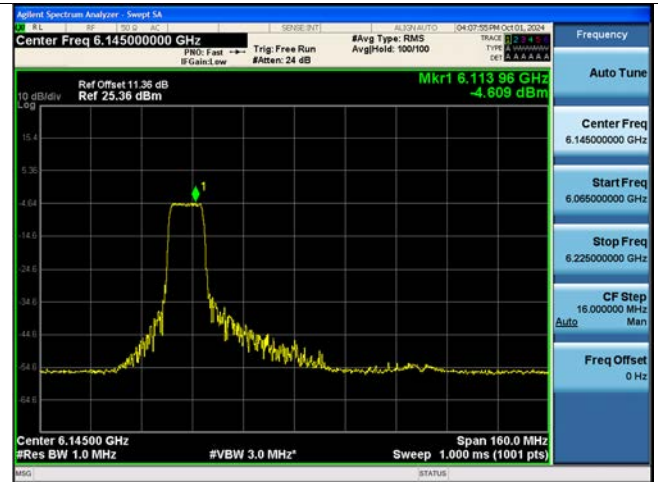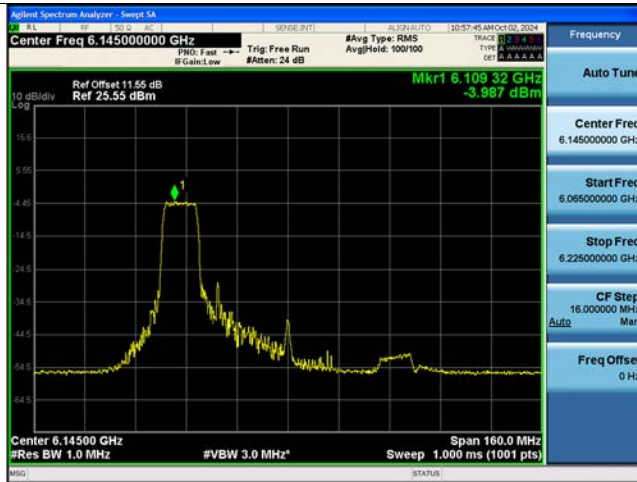



802.11be EHT160_80L Ch.79(6345 MHz) 106T + 26T RU 82

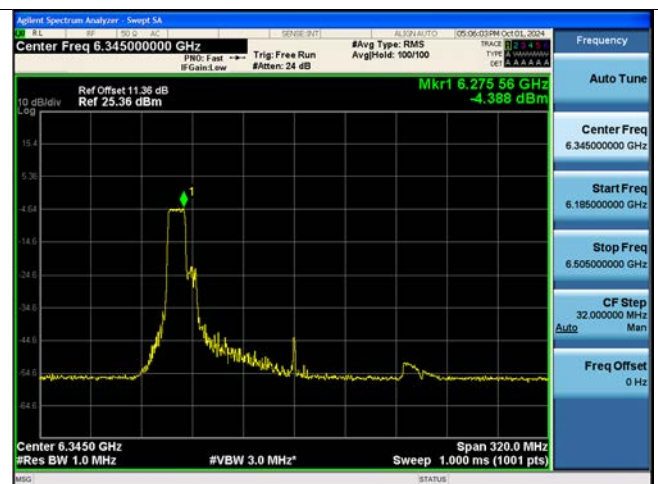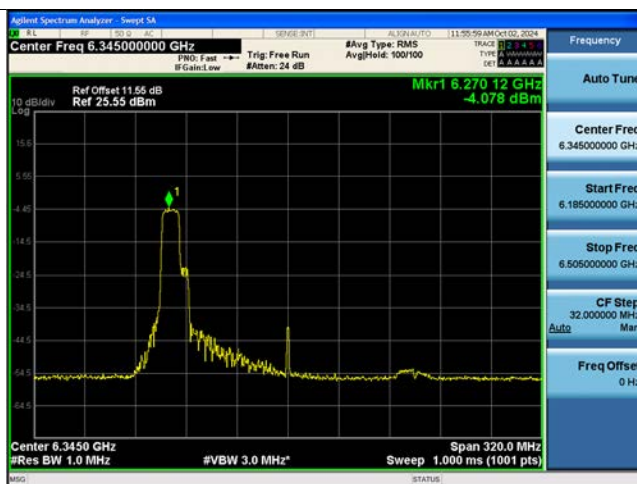

Ant.1

Ant.2

802.11be EHT320_80MH Ch.31(6105 MHz) 106T + 26T RU 82

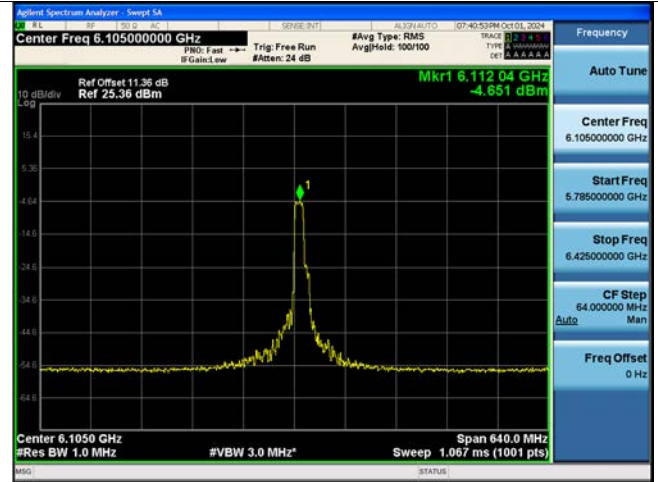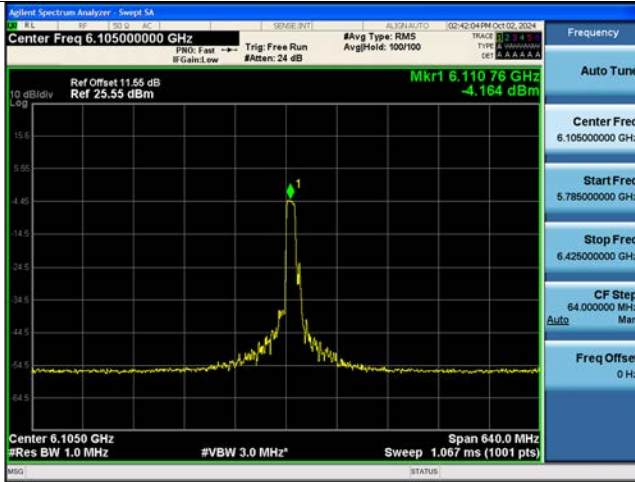

Note: In order to simplify the report, attached plots were only channel of the highest PSD.

[SRU]

Ant.1

Ant.2

802.11be EHT20 Ch.45(6175 MHz) 26 Tones RU 0



802.11be EHT40 Ch.43(6165 MHz) 26 Tones RU 0




Ant.1

Ant.2

802.11be EHT80 Ch.39(6145 MHz) 26 Tones RU 0




802.11be EHT160_80L Ch.47(6185 MHz) 26 Tones RU 18

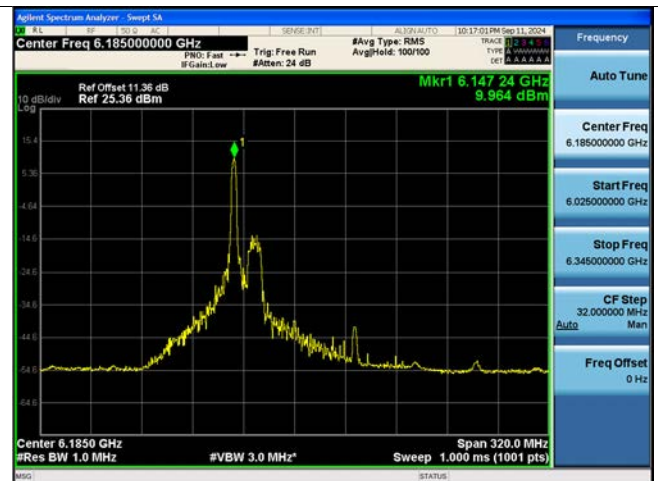

Ant.1

Ant.2

802.11be EHT320_80LL Ch.63(6265 MHz) 26 Tones RU 0

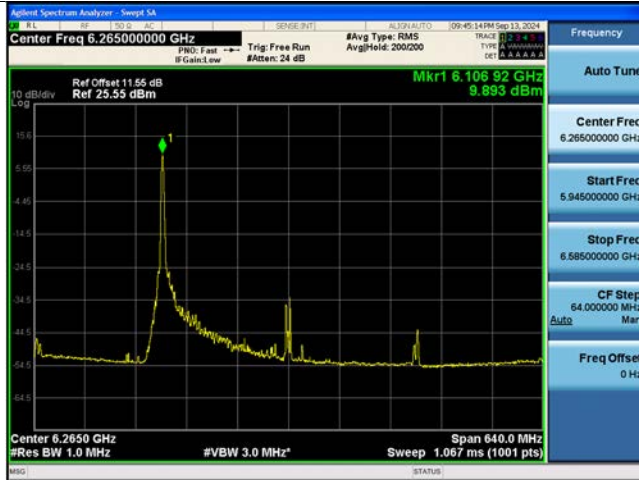


802.11a Ch.93(6415 MHz)



Ant.1

Ant.2

802.11be EHT20 Ch.45(6175 MHz) 52T + 26T RU 70

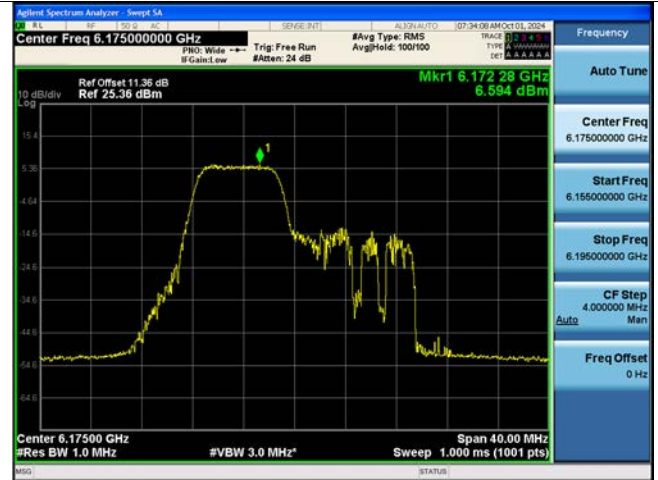


802.11be EHT40 Ch.3(5965 MHz) 52T + 26T RU 70





Ant.1

Ant.2

802.11be EHT80 Ch.39(6145 MHz) 52T + 26T RU 70

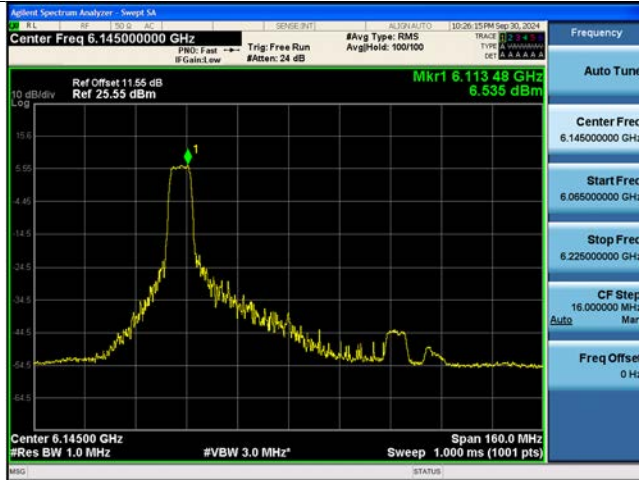



802.11be EHT160 Ch.15(6025 MHz) 52T + 26T RU 70

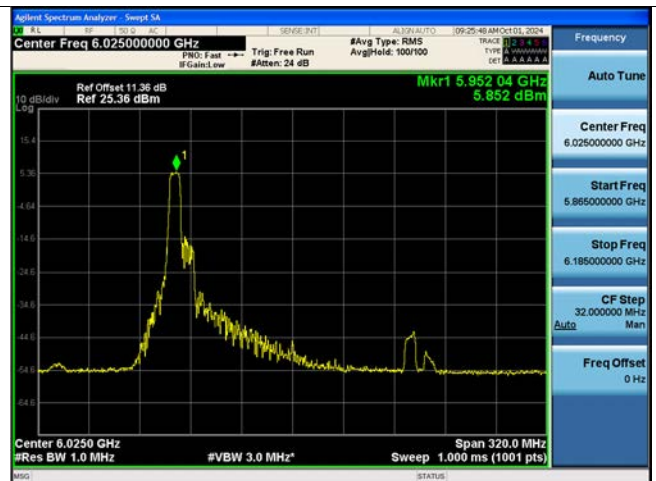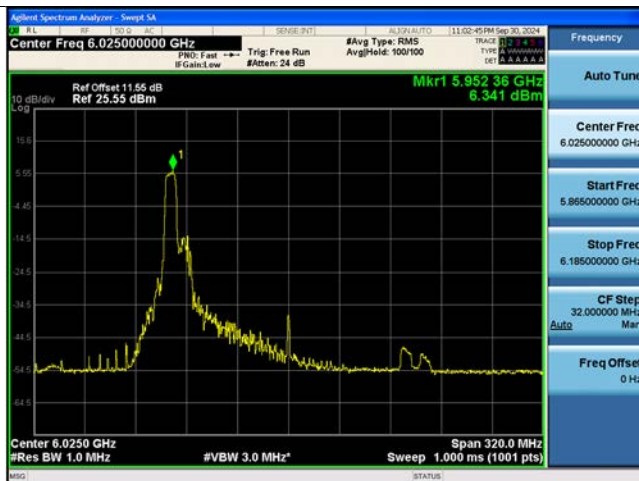

Ant.1

Ant.2

802.11be EHT320_80LL Ch.63(6265 MHz) 52T + 26T RU 75

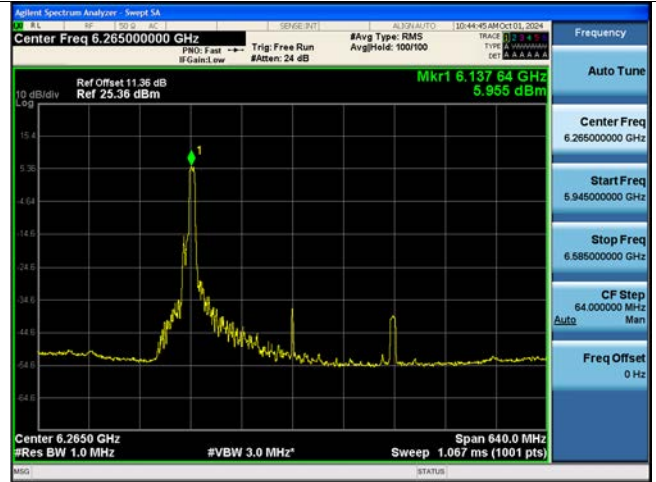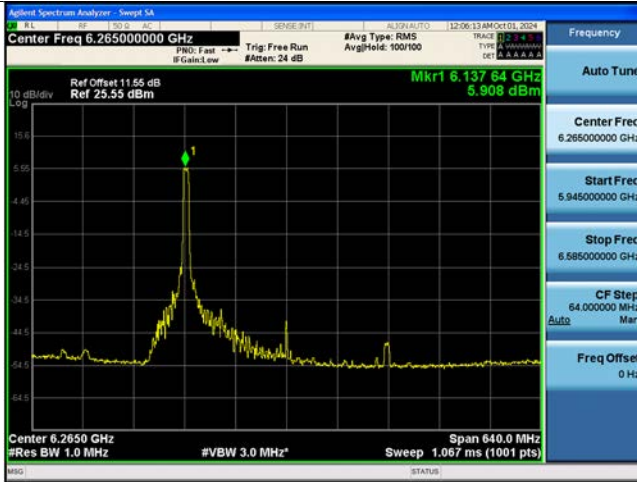

[Very Low Power Device]



Note: In order to simplify the report, attached plots were only channel of the highest PSD.

[SRU]



Ant.1

Ant.2

802.11be EHT20 Ch.149(6695 MHz) 242 Tones RU 61

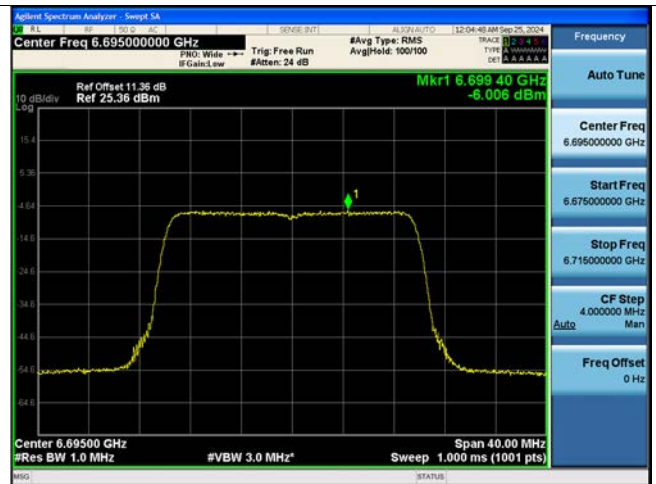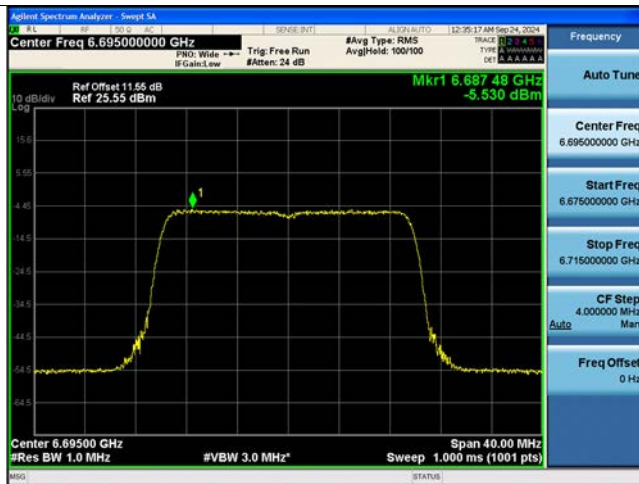


802.11be EHT40 Ch.123(6565 MHz) 242 Tones RU 62

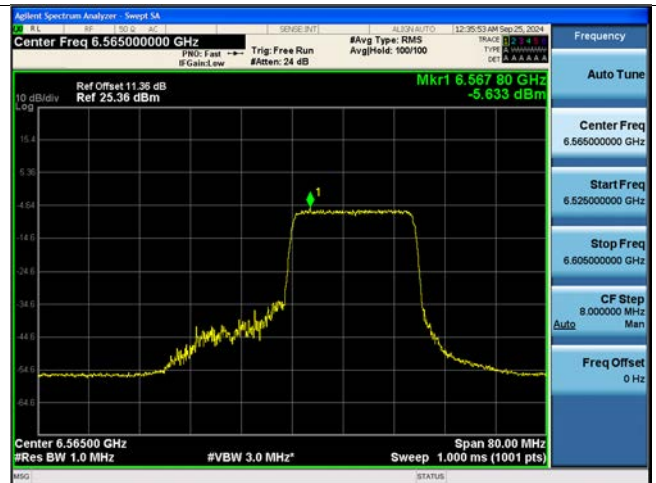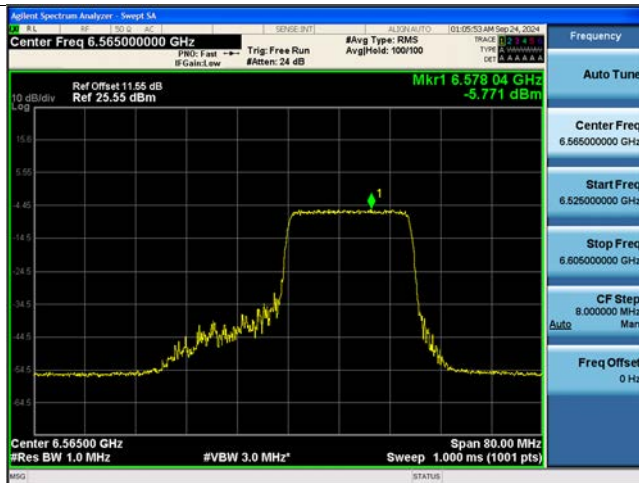



Ant.1

Ant.2

802.11be EHT80 Ch.87(6385 MHz) 106 Tones RU 60

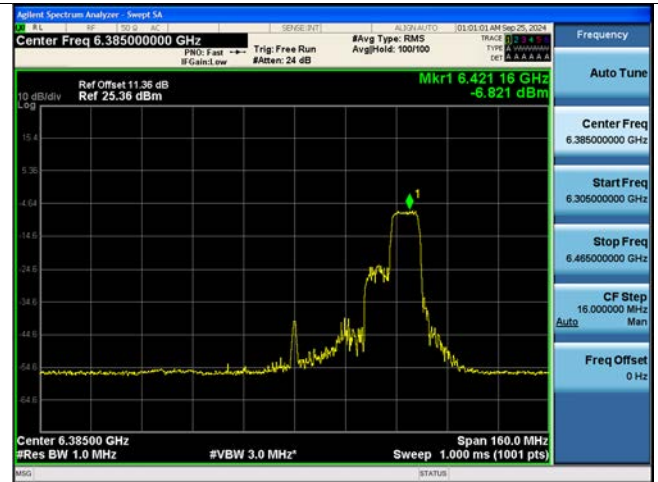



802.11be EHT160 Ch.79(6345 MHz) 242 Tones RU 61

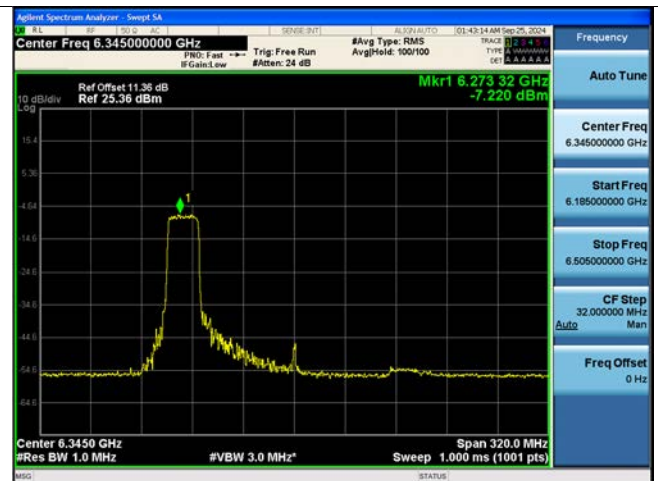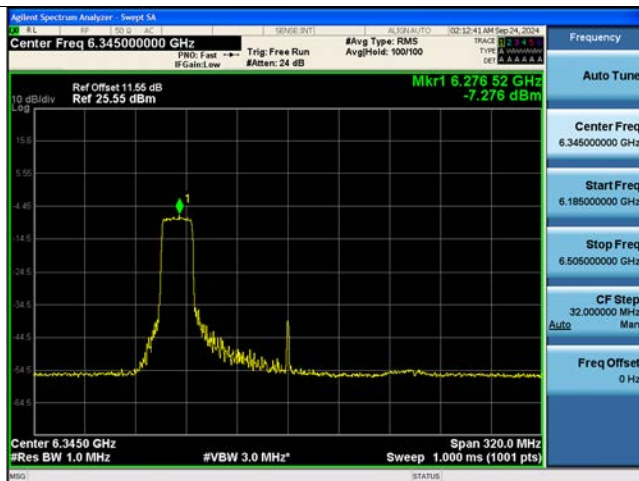



Ant.1

Ant.2

802.11be EHT320_80LM Ch.63(6105 MHz) 996 Tones RU 67

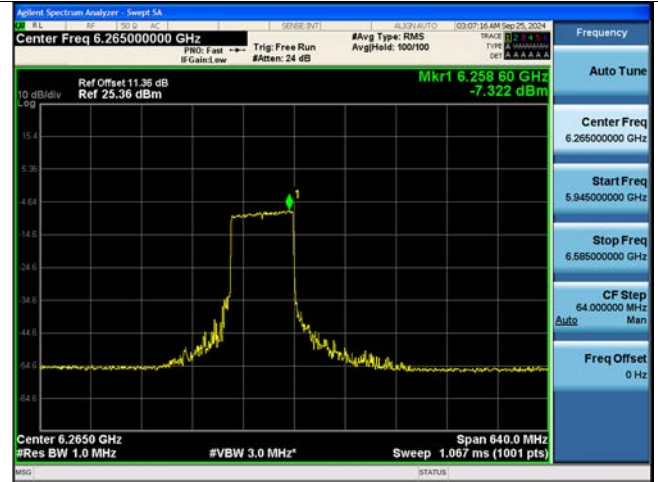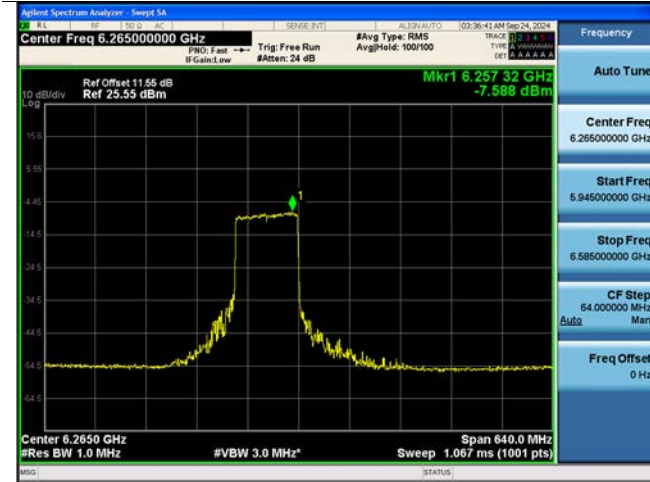



802.11a Ch.181(6855 MHz)

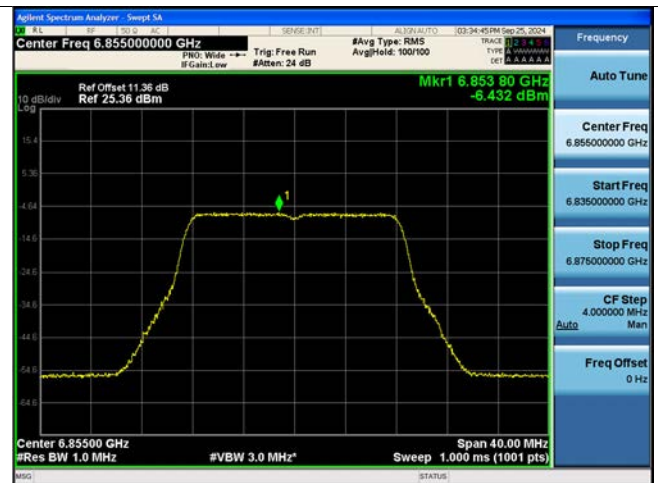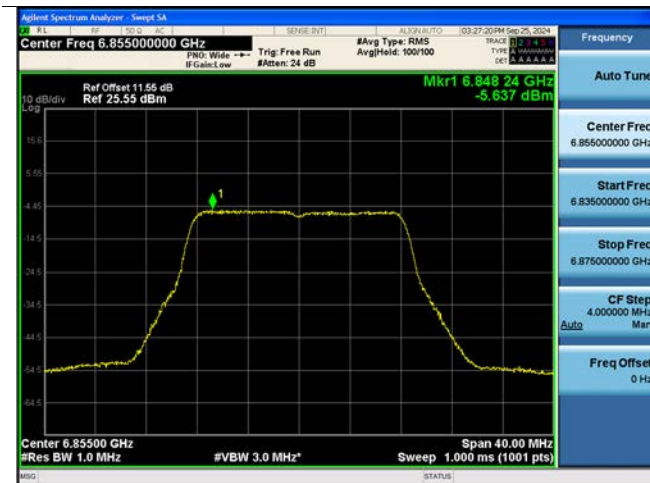



Ant.1

Ant.2

802.11be EHT20 Ch.93(6415 MHz) 106T+26T RU 82

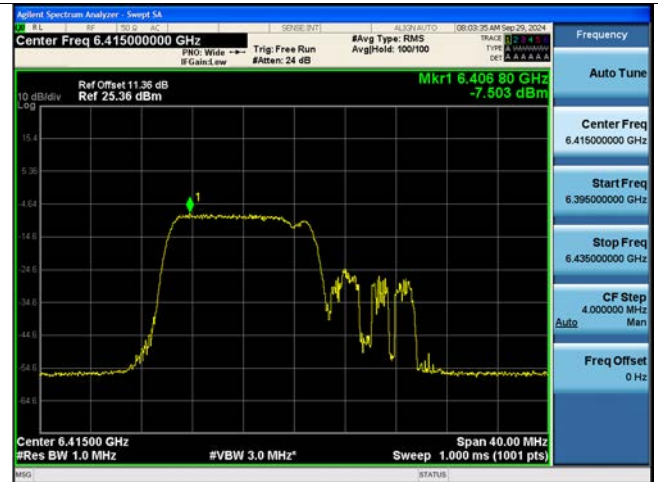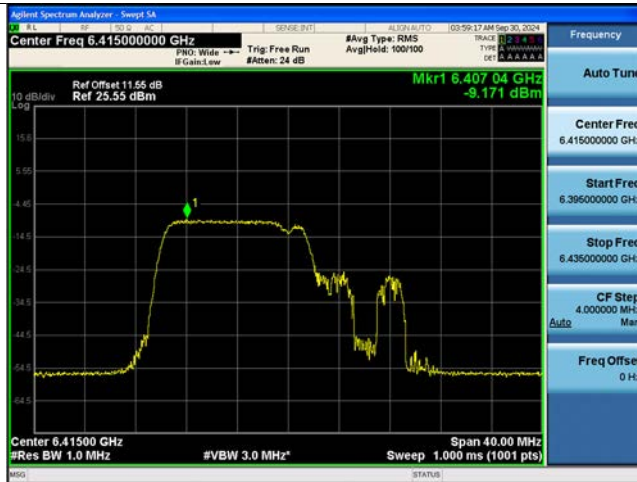


802.11be EHT40 Ch.43(6165 MHz) 106T+26T RU 82

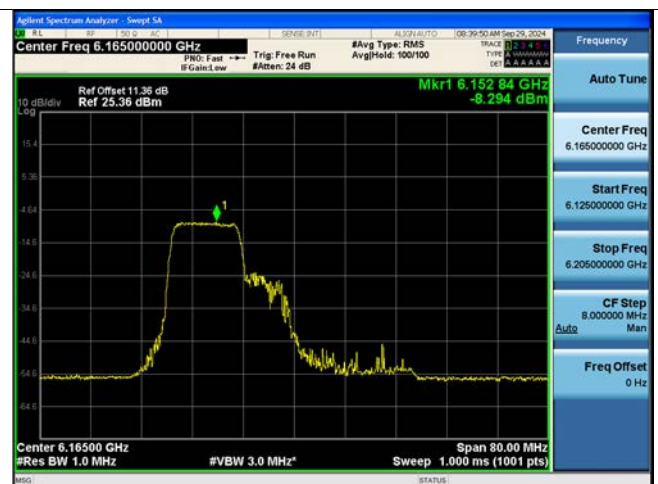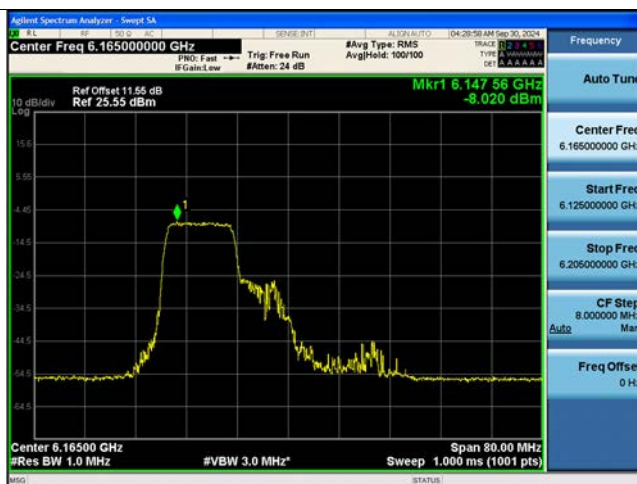



Ant.1

Ant.2

802.11be EHT80 Ch.87(6385 MHz) 106T+26T RU 82

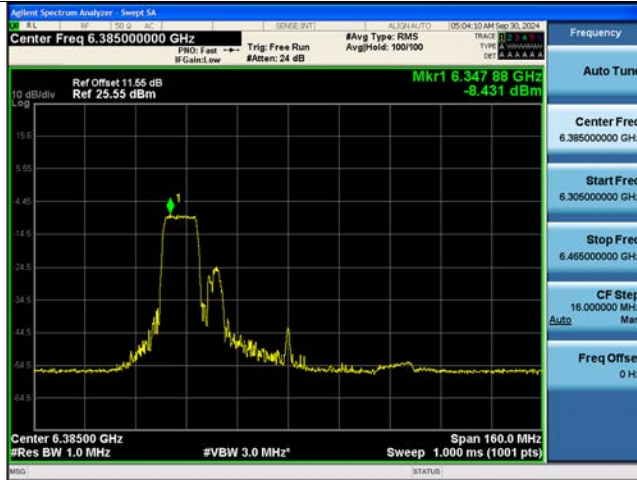



802.11be EHT160_80L Ch.79(6345 MHz) 106T+26T RU 85

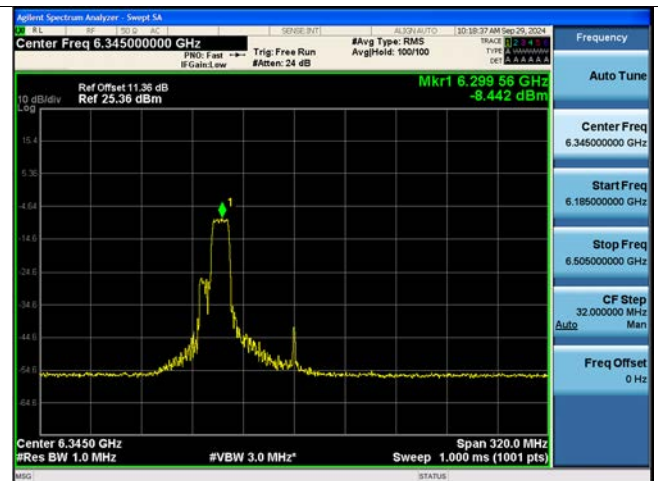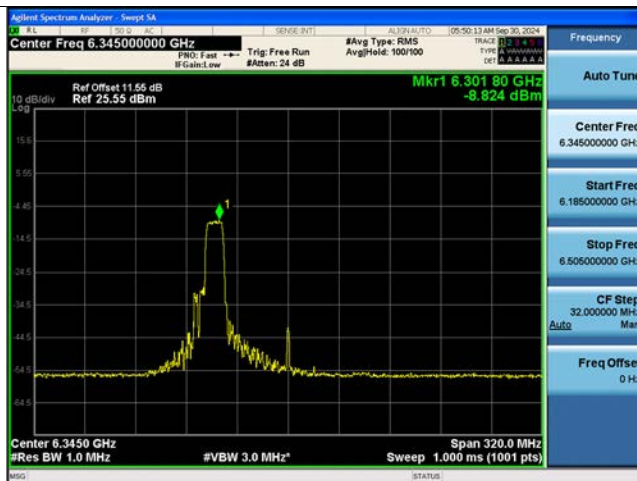

Ant.1

Ant.2

802.11be EHT320_80LL Ch.63(6265 MHz) 106T+26T RU 85

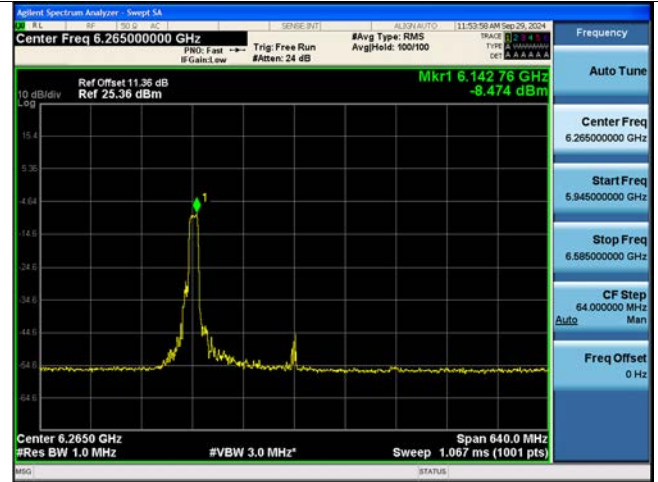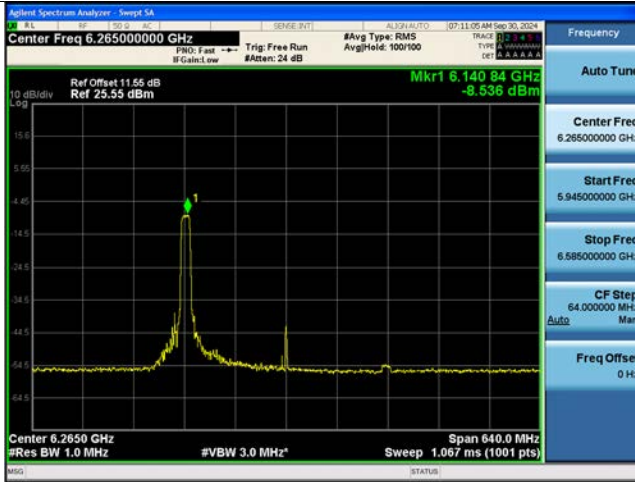

10.5 In-Band Emission

Note: In order to simplify the report, attached plots were only the widest channel.


Test Plots(In-Band Emission (Emission Mask))

[SRU]


[Indoor Cilent]

[Ant.1]


802.11be EHT20M Ch.209(6995 MHz) 26 Tones 0 RU

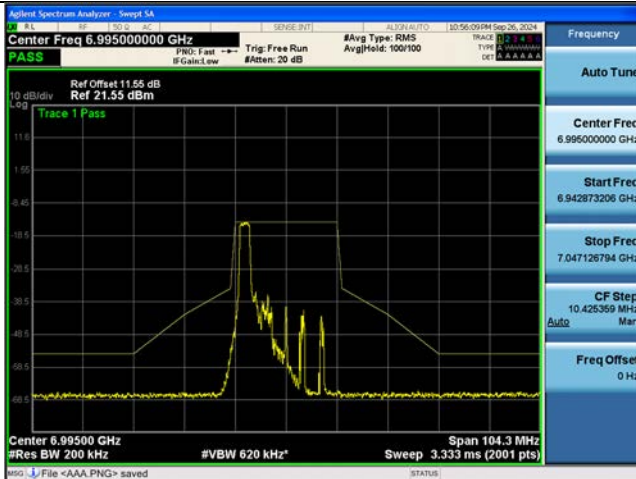


802.11be EHT20M Ch.209(6995 MHz) 52 Tones 37 RU

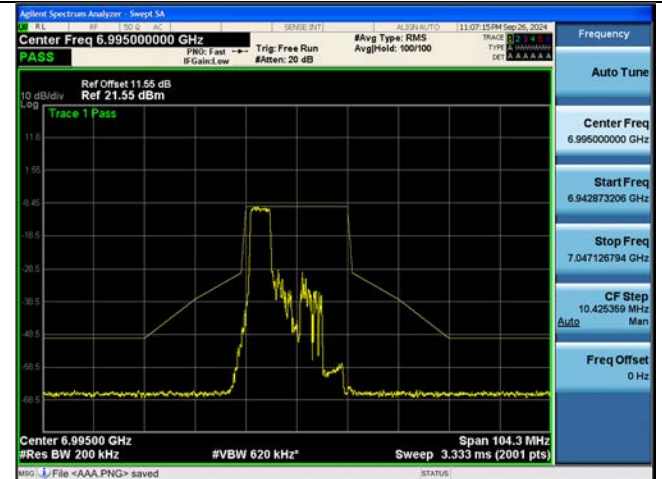


802.11be EHT20M Ch.209(6995 MHz) 106 Tones 53 RU

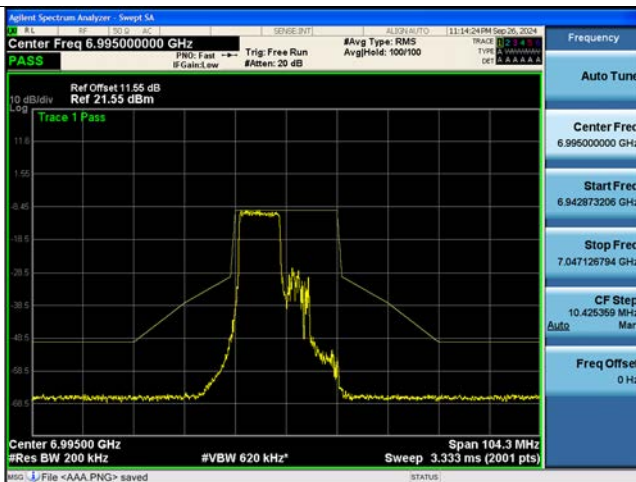


802.11be EHT20M Ch.209(6995 MHz) 242 Tones 61 RU

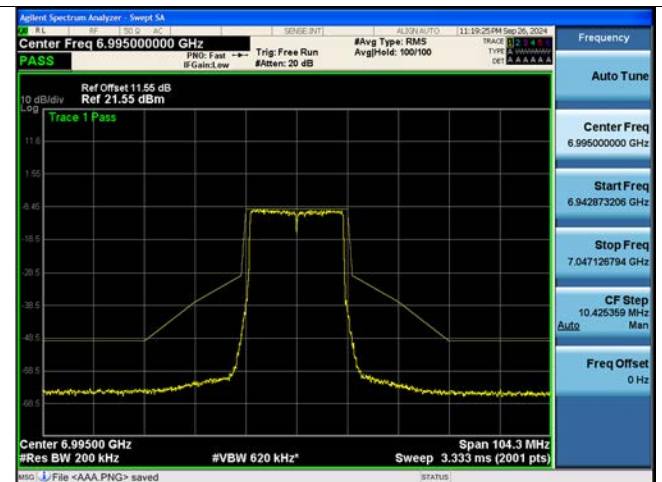


802.11be EHT20M Ch.209(6995 MHz) SU

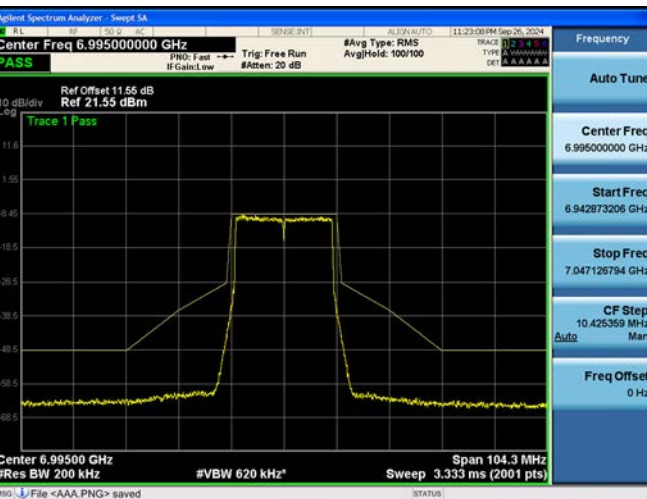

802.11be EHT40M Ch.91(6405 MHz) 26 Tones 0 RU

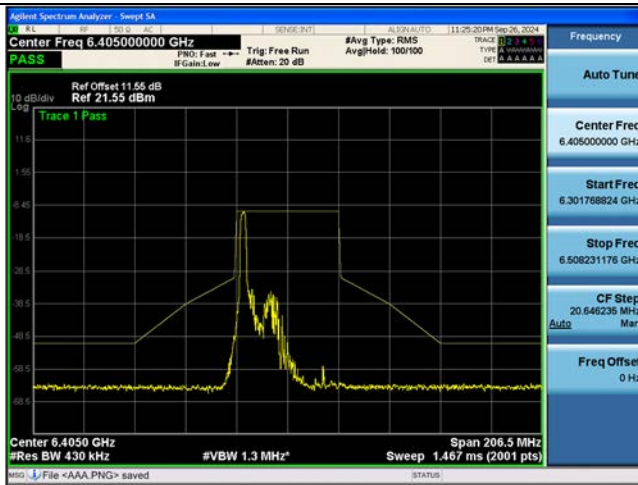


802.11be EHT40M Ch.91(6405 MHz) 52 Tones 37 RU

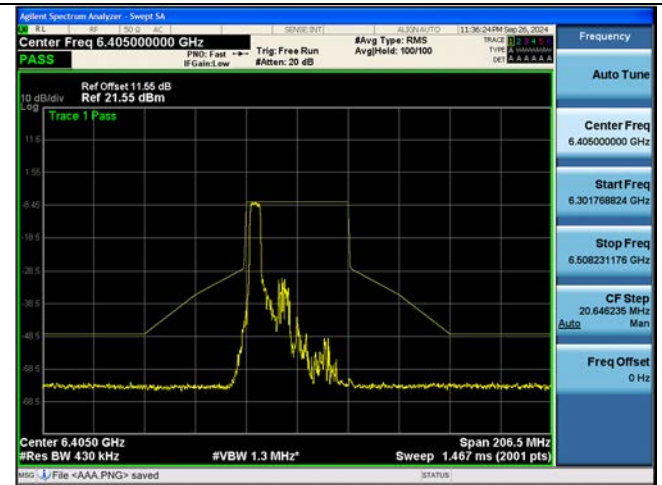


802.11be EHT40M Ch.91(6405 MHz) 106 Tones 53 RU




802.11be EHT40M Ch.91(6405 MHz) 242 Tones 61 RU

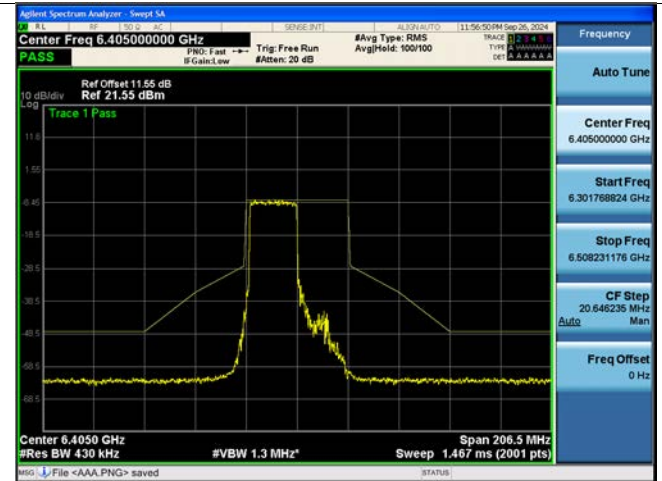


802.11be EHT40M Ch.91(6405 MHz) 484 Tones 65 RU

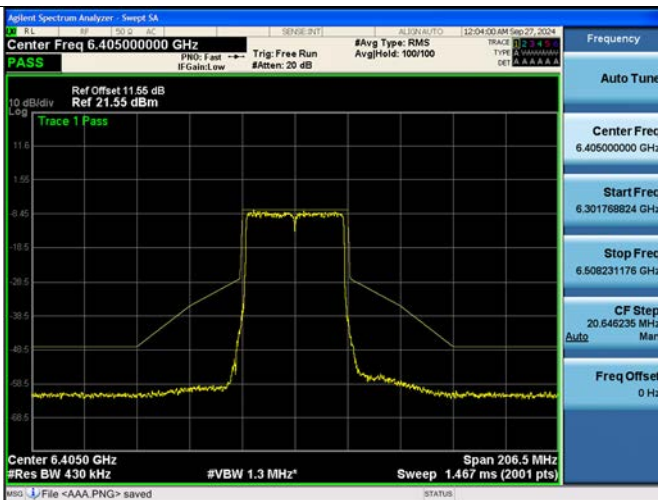


802.11be EHT40M Ch.91(6405 MHz) SU

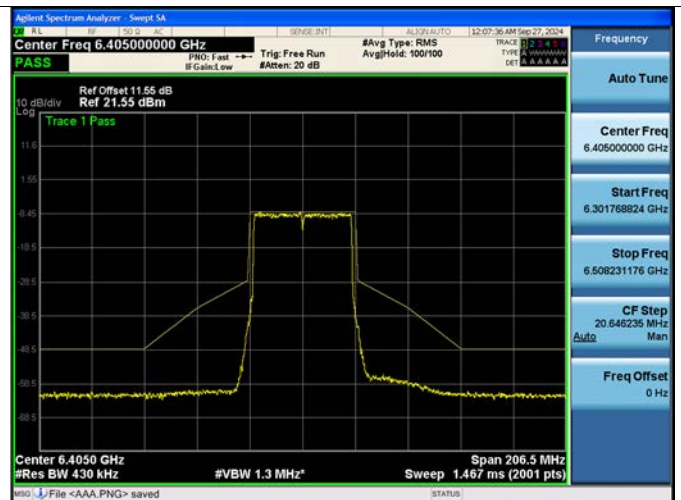


802.11be EHT80M Ch.215(7025 MHz) 26 Tones 0 RU

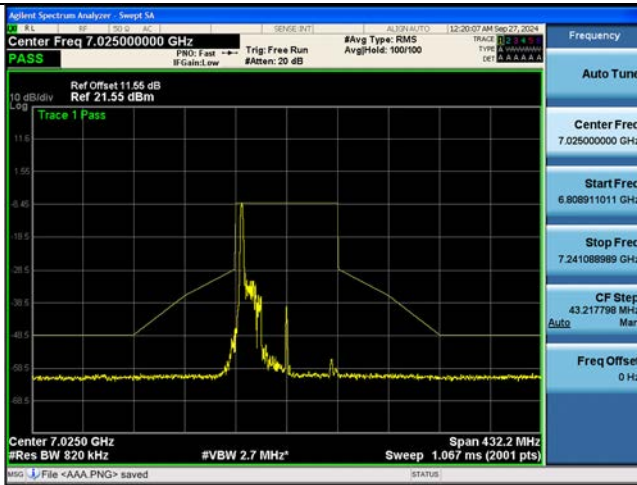


802.11be EHT80M Ch.215(7025 MHz) 52 Tones 37 RU

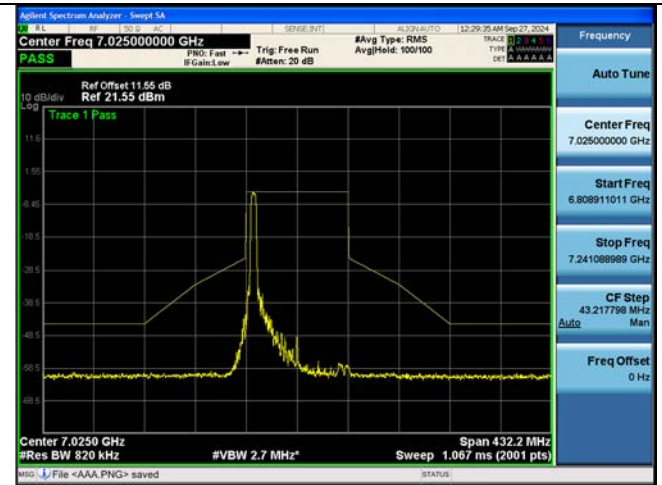

802.11be EHT80M Ch.215(7025 MHz) 106 Tones 53 RU

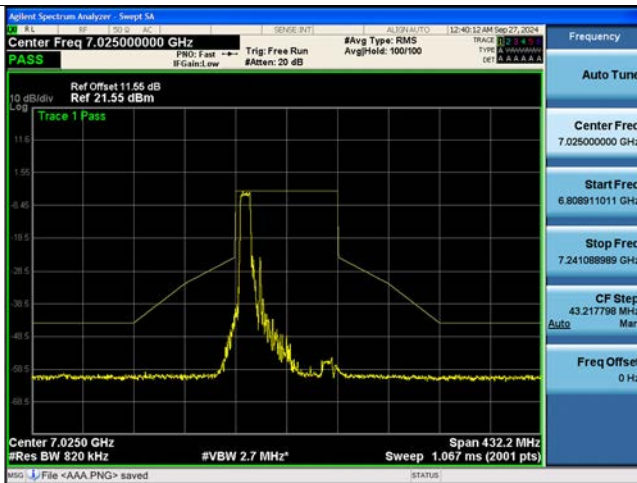

802.11be EHT80M Ch.215(7025 MHz) 242 Tones 61 RU

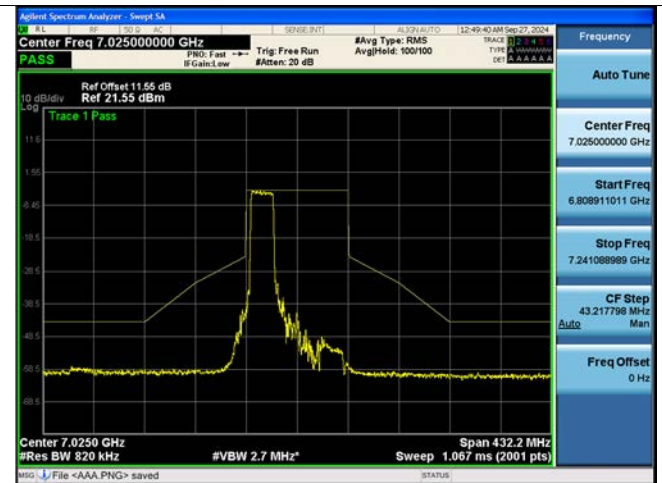

802.11be EHT80M Ch.215(7025 MHz) 484 Tones 65 RU




802.11be EHT80M Ch.215(7025 MHz) 996 Tones 67 RU




802.11be EHT80M Ch.215(7025 MHz) SU




802.11be EHT160M Ch.207(6985 MHz) 26 Tones 0 RU

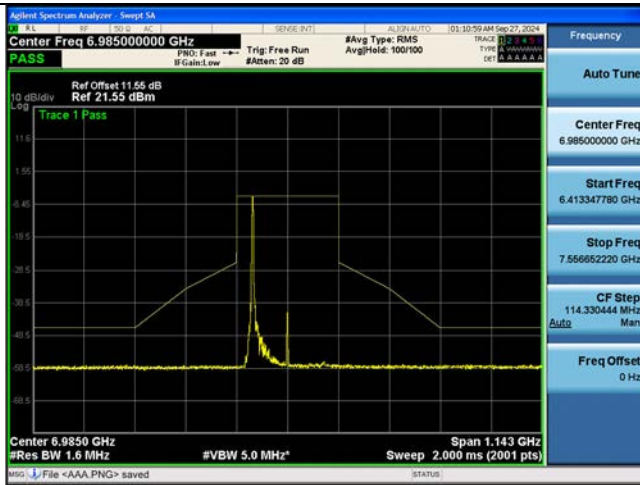


802.11be EHT160M Ch.207(6985 MHz) 52 Tones 37 RU

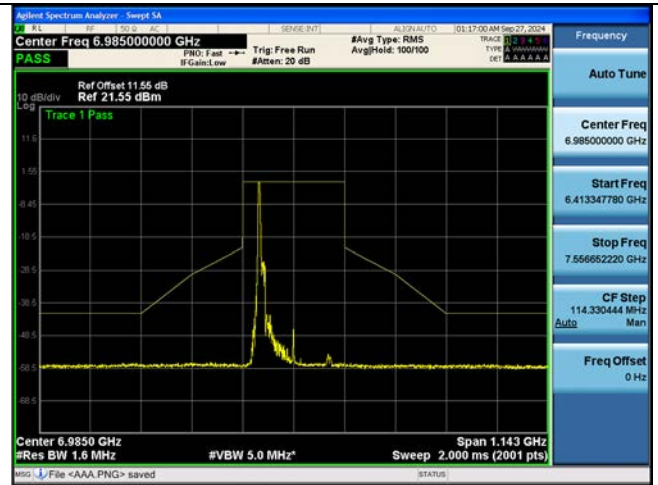


802.11be EHT160M Ch.207(6985 MHz) 106 Tones 53 RU

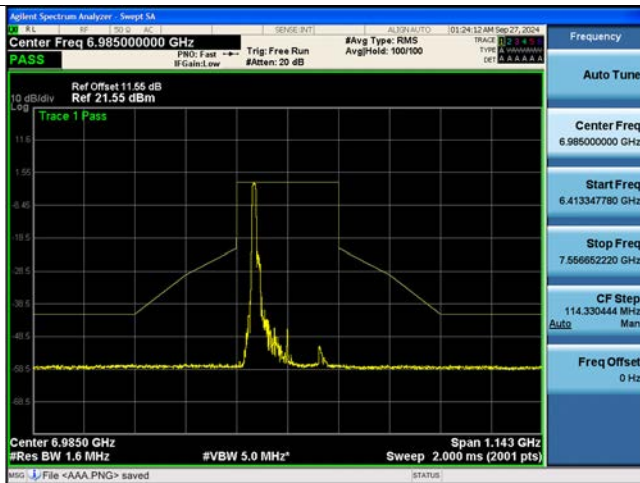

802.11be EHT160M Ch.207(6985 MHz) 242 Tones 61 RU

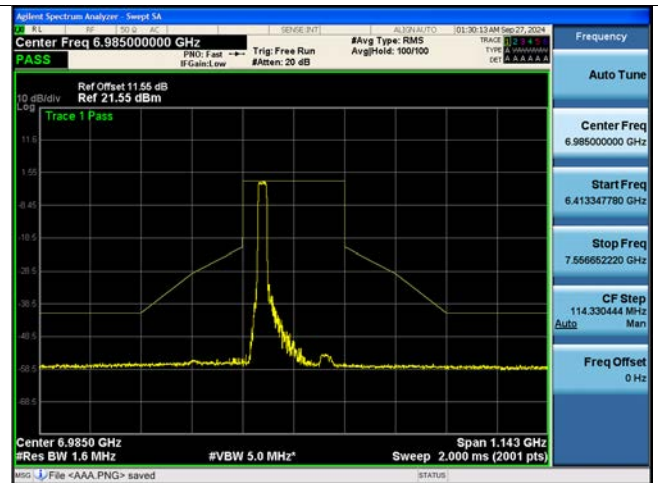

802.11be EHT160M Ch.207(6985 MHz) 484 Tones 65 RU

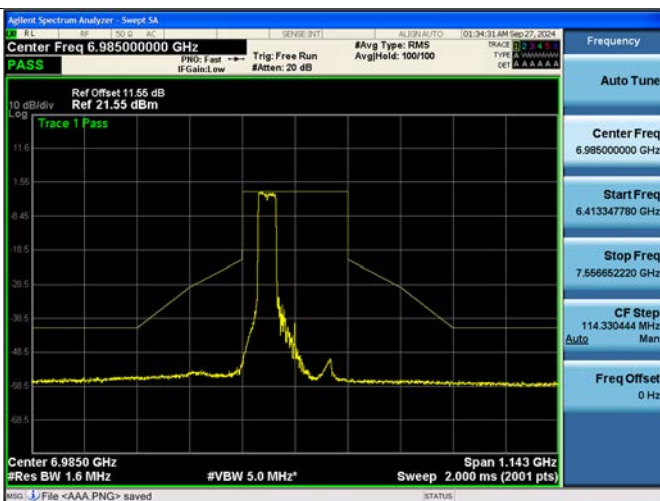

802.11be EHT160M Ch.207(6985 MHz) 996 Tones 67 RU




Bandwidth 160M, Ch. 207(6985 MHz) SU




Bandwidth 160M, Ch. 207(6985 MHz) 2x996 Tones 68 RU




Bandwidth 320M, Ch. 95(6425 MHz) 26 Tones 0 RU

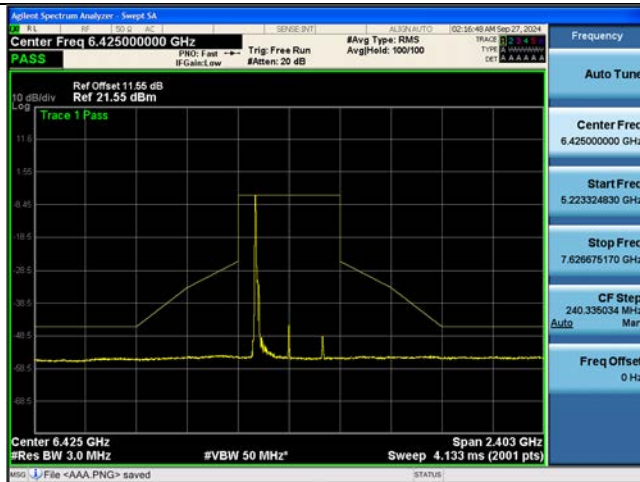


Bandwidth 320M, Ch. 95(6425 MHz) 52 Tones 37 RU

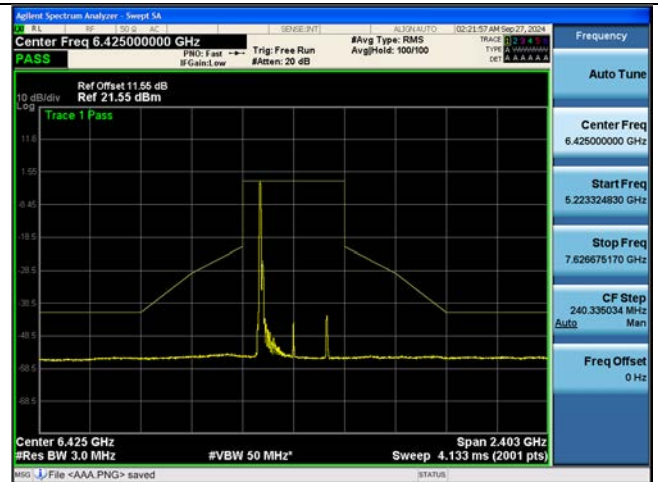


Bandwidth 320M, Ch. 95(6425 MHz) 106 Tones 53 RU

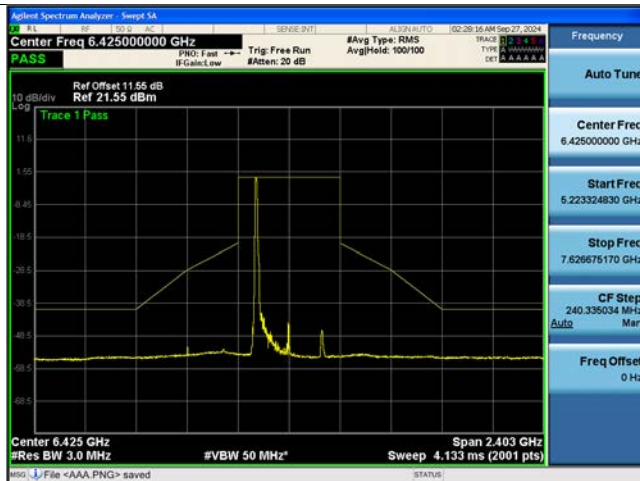

Bandwidth 320M, Ch. 95(6425 MHz) 242 Tones 61 RU

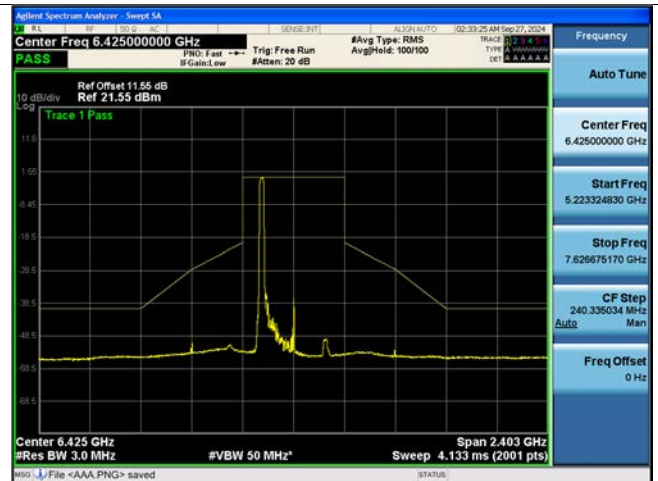

Bandwidth 320M, Ch. 95(6425 MHz) 484 Tones 65 RU

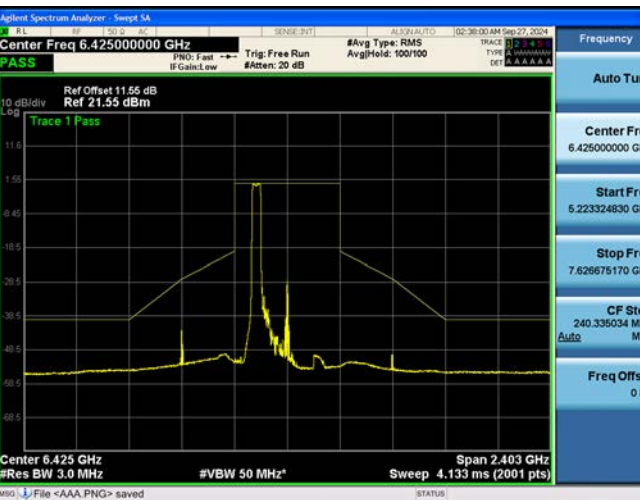


Bandwidth 320M, Ch. 95(6425 MHz) 996 Tones 67 RU



Bandwidth 320M_160L, Ch. 95(6425 MHz) 2x996 Tones 68 RU



Bandwidth 320M_160U, Ch. 95(6425 MHz) 2x996 Tones 68 RU

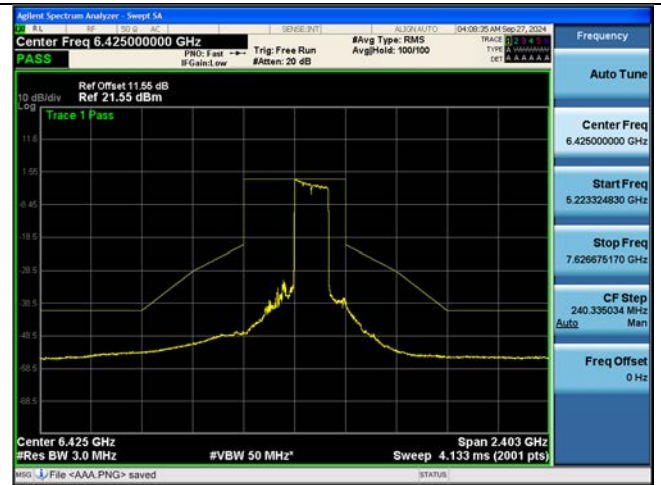


Bandwidth 320M, Ch. 95(6425 MHz) SU



Bandwidth 320M, Ch. 95(6425 MHz) 4x996 Tones 69 RU




802.11a Ch.45(6175 MHz)

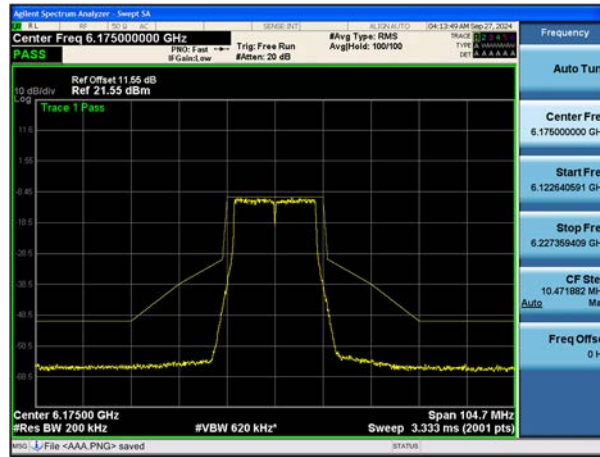


[Ant.2]


802.11be EHT20M Ch.181(6855 MHz) 26 Tones 0 RU

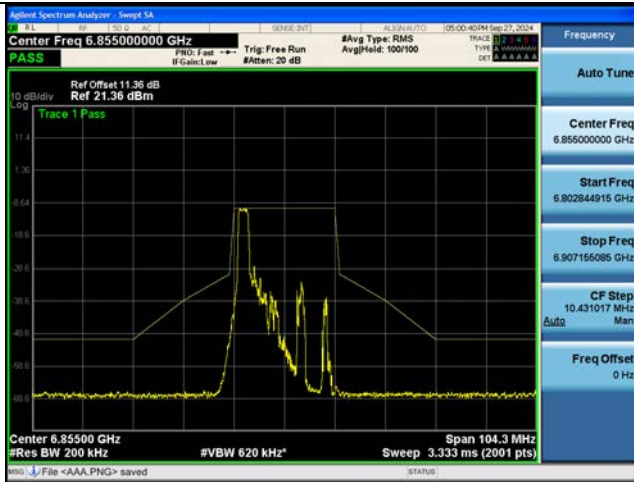


802.11be EHT20M Ch.181(6855 MHz) 52 Tones 37 RU

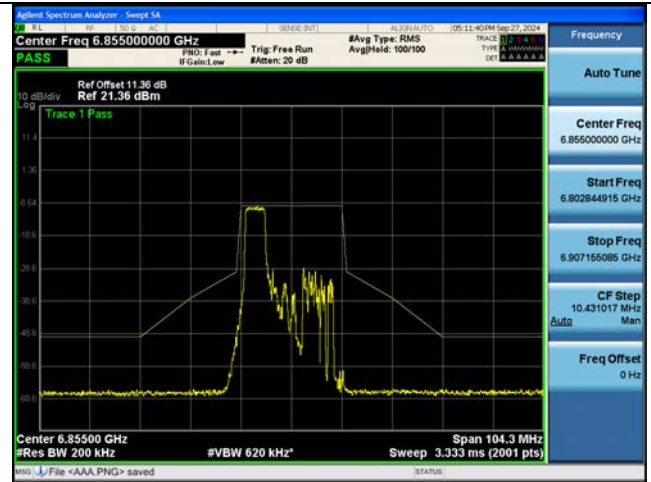


802.11be EHT20M Ch.181(6855 MHz) 106 Tones 53 RU

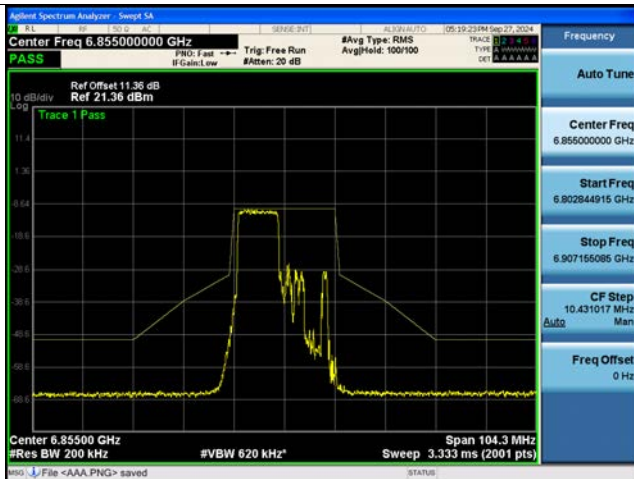


802.11be EHT20M Ch.181(6855 MHz) 242 Tones 61 RU

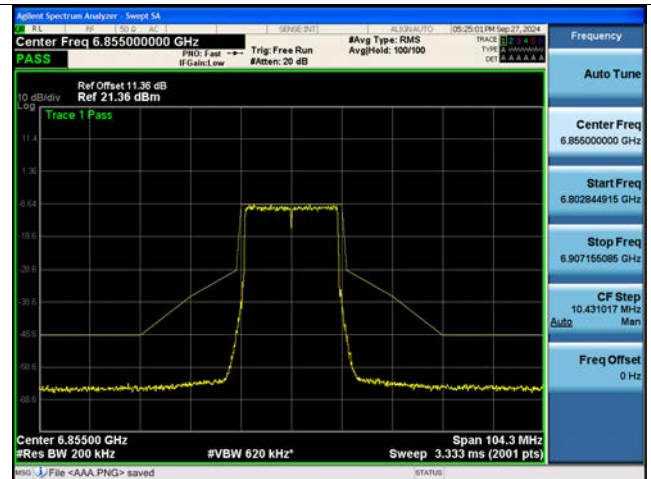


802.11be EHT20M Ch.181(6855 MHz) SU

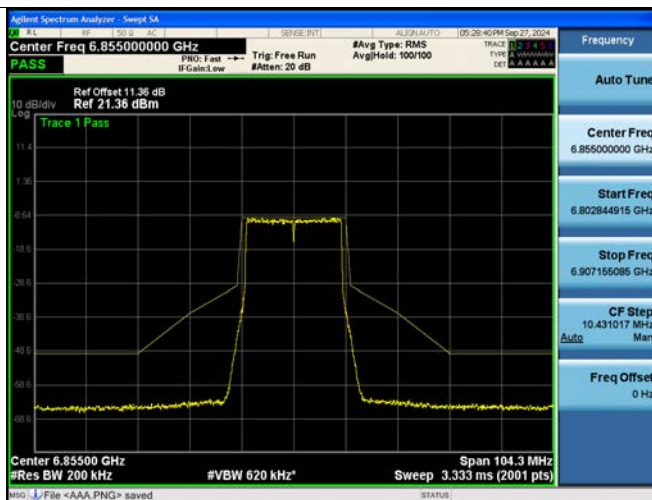

802.11be EHT40M Ch.227(7085 MHz) 26 Tones 0 RU

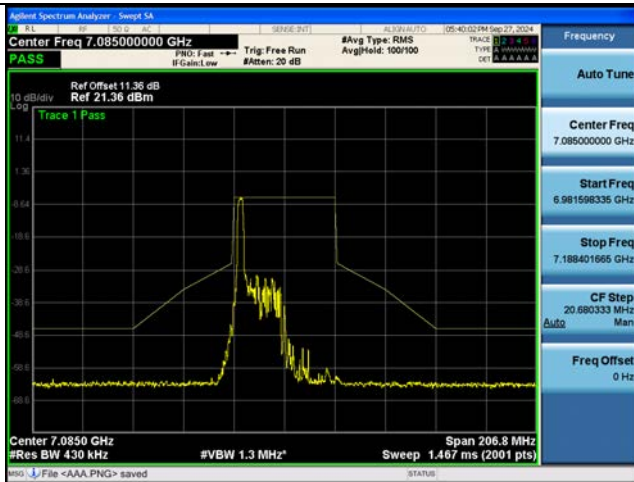


802.11be EHT40M Ch.227(7085 MHz) 52 Tones 37 RU

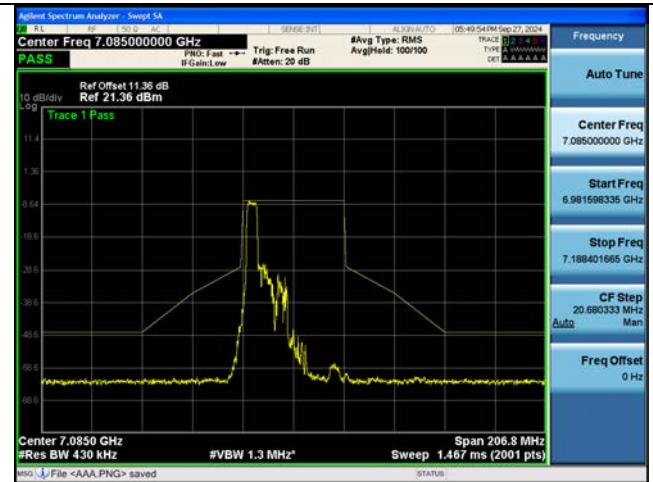


802.11be EHT40M Ch.227(7085 MHz) 106 Tones 53 RU



802.11be EHT40M Ch.227(7085 MHz) 242 Tones 61 RU

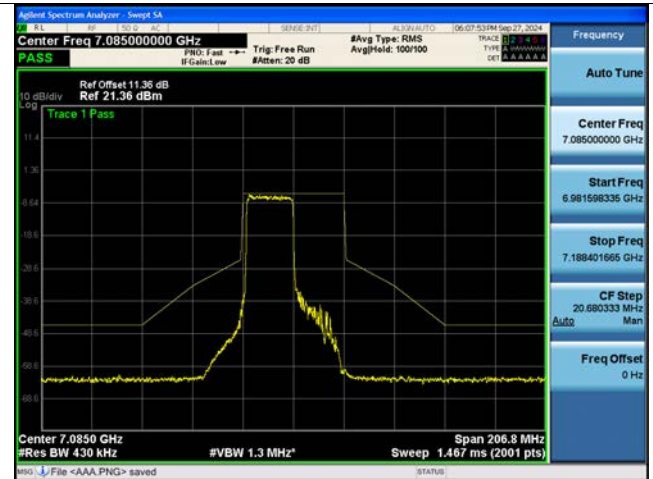

802.11be EHT40M Ch.227(7085 MHz) 484 Tones 65 RU

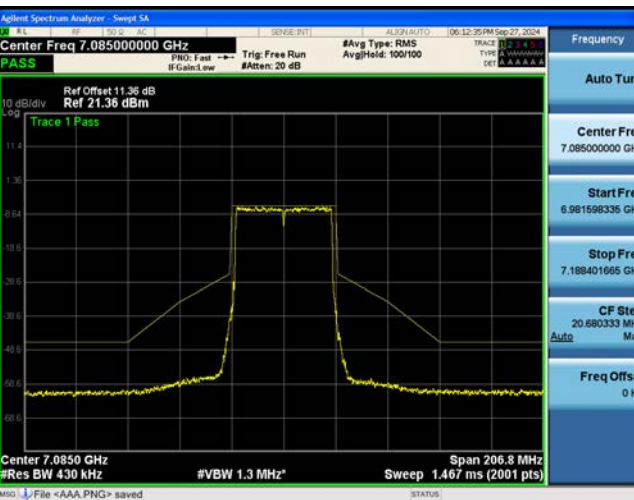

802.11be EHT40M Ch.227(7085 MHz) SU

