



FCC 47 CFR PART 15 SUBPART E

UNII

CERTIFICATION TEST REPORT

FOR

WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER : SM-T397U

FCC ID: A3LSMT397U

REPORT NUMBER: 4788212489-E4V1

ISSUE DATE: DEC 04, 2017

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	12/04/17	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. SUMMARY TABLE	14
8. REFERENCE MEASUREMENTS RESULTS	15
8.1. ON TIME AND DUTY CYCLE RESULTS.....	15
8.2. DUTY CYCLE PLOTS	15
8.3. 26 dB BANDWIDTH.....	18
8.3.1. 802.11a MODE IN THE 5.2 GHz BAND	19
8.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	19
8.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	19
8.3.4. 802.11n VHT80 MODE IN THE 5.2 GHz BAND	19
8.3.5. 802.11a MODE IN THE 5.3 GHz BAND	20
8.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	20
8.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	20
8.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	20
8.3.9. 802.11a MODE IN THE 5.5 GHz BAND	21
8.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND	21
8.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND	21
8.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND	21
8.3.13. 802.11a MODE IN THE 5.8 GHz BAND	22
8.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND	22
8.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND	22
8.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	22

8.3.17.	26 dB BANDWIDTH PLOTS	23
9.	ANTENNA PORT TEST RESULTS	37
9.1.	6 dB BANDWIDTH.....	37
9.1.1.	802.11a MODE IN THE 5.8 GHz BAND	38
9.1.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	38
9.1.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	38
9.1.4.	802.11n VHT80 MODE IN THE 5.8 GHz BAND	38
9.1.5.	6 dB BANDWIDTH PLOTS	39
9.2.	OUTPUT POWER AND PPSD.....	43
9.2.1.	802.11a MODE IN THE 5.2 GHz BAND	44
9.2.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	45
9.2.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	46
9.2.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	47
9.2.5.	802.11a MODE IN THE 5.3 GHz BAND	48
9.2.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	49
9.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	50
9.2.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	51
9.2.9.	802.11a MODE IN THE 5.5 GHz BAND	52
9.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	53
9.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	54
9.2.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	55
9.2.13.	802.11a MODE IN THE 5.8 GHz BAND	56
9.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	57
9.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	58
9.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	59
9.2.17.	802.11a MODE AT STRADDLE CHANNEL	60
9.2.18.	802.11n HT20 MODE AT STRADDLE CHANNEL	61
9.2.19.	802.11n HT40 MODE AT STRADDLE CHANNEL	62
9.2.20.	802.11ac80 VHT80 MODE AT STRADDLE CHANNEL	63
9.2.21.	OUTPUT POWER AND PPSD PLOTS	64
10.	TRANSMITTER ABOVE 1 GHz.....	82
10.1.	5.2 GHz.....	84
10.1.1.	TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND	84
10.1.2.	TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND	92
10.1.3.	TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND	100
10.1.4.	TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.2GHz BAND	106
10.2.	5.3 GHz.....	110
10.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	110
10.2.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.3GHz BAND	118
10.2.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND	126
10.2.4.	TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.3GHz BAND	132
10.3.	5.5-5.6 GHz.....	136
10.3.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND	136
10.3.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND	148
10.3.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND	160
10.3.4.	TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.5GHz BAND	172

10.4.	5.8 GHz.....	180
10.4.1.	TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND	180
10.4.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND.....	190
10.4.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.8GHz BAND.....	200
10.4.4.	TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.8GHz BAND.....	208
10.5.	BANDEDGE (on Worst case) equipped with protective case.....	212
10.6.	HARMONICS AND SPURIOUS EMISSIONS (on Worst case) equipped with protective case	213
11.	WORST-CASE BELOW 1 GHz (in the 5.2 GHz Band).....	215
12.	AC POWER LINE CONDUCTED EMISSIONS	217
13.	DYNAMIC FREQUENCY SELECTION.....	220
13.1.	OVERVIEW.....	220
13.1.1.	LIMITS.....	220
13.1.1.	TEST AND MEASUREMENT SYSTEM	224
13.1.2.	SETUP OF EUT.....	227
13.1.3.	DESCRIPTION OF EUT	228
13.1.	RESULTS FOR 20 MHz BANDWIDTH.....	229
13.1.1.	TEST CHANNEL	229
13.1.2.	RADAR WAVEFORM AND TRAFFIC	229
13.1.3.	OVERLAPPING CHANNEL TESTS.....	231
13.1.4.	MOVE AND CLOSING TIME	231
13.2.	RESULTS FOR 40 MHz BANDWIDTH.....	234
13.2.1.	TEST CHANNEL	234
13.2.2.	RADAR WAVEFORM AND TRAFFIC	234
13.2.3.	OVERLAPPING CHANNEL TESTS.....	236
13.2.4.	MOVE AND CLOSING TIME	236
13.3.	RESULTS FOR 80 MHz BANDWIDTH.....	239
13.3.1.	TEST CHANNEL	239
13.3.2.	RADAR WAVEFORM AND TRAFFIC	239
13.3.3.	OVERLAPPING CHANNEL TESTS.....	241
13.3.4.	MOVE AND CLOSING TIME	241
14.	SETUP PHOTOS.....	244

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER: SM-T397U

SERIAL NUMBER: R32J9002MAD (RADIATED);
R32J9002MFF (CONDUCTED)


DATE TESTED: OCT 31, 2017 - NOV 30, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☒ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC.
This test report addresses the NII (UNII) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a	11.862	15.35
	802.11n HT20	12.495	17.76
5190 - 5230	802.11n HT40	10.649	11.61
5210	802.11ac VHT80	10.382	10.92
5260 - 5320	802.11a	12.379	17.29
	802.11n HT20	12.156	16.43
5270 - 5310	802.11n HT40	9.308	8.53
5290	802.11ac VHT80	10.904	12.32
5500 - 5720	802.11a	12.351	17.18
	802.11n HT20	11.911	15.53
5510 - 5710	802.11n HT40	9.901	9.77
5530 - 5690	802.11ac VHT80	9.514	8.94
5745 - 5825	802.11a	12.431	17.50
	802.11n HT20	12.395	17.36
5755 - 5795	802.11n HT40	10.416	11.00
5775	802.11ac VHT80	10.289	10.69

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]
UNII 1 5150 – 5250	-0.7
UNII 2A 5250 – 5350	-0.5
UNII 2C 5470 – 5725	-0.1
UNII 3 5725 – 5850	-0.1

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the Y orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT80 mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12JWE	DK1G3209VS/B- E	N/A
Data Cable	SAMSUNG	EP-DN930CWZ	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C-type	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A

NOTE : Protective cover (with S-pen) is in-box item. So additional radiated spurious emission measurements were performed on worst case equipped with protective case.

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS

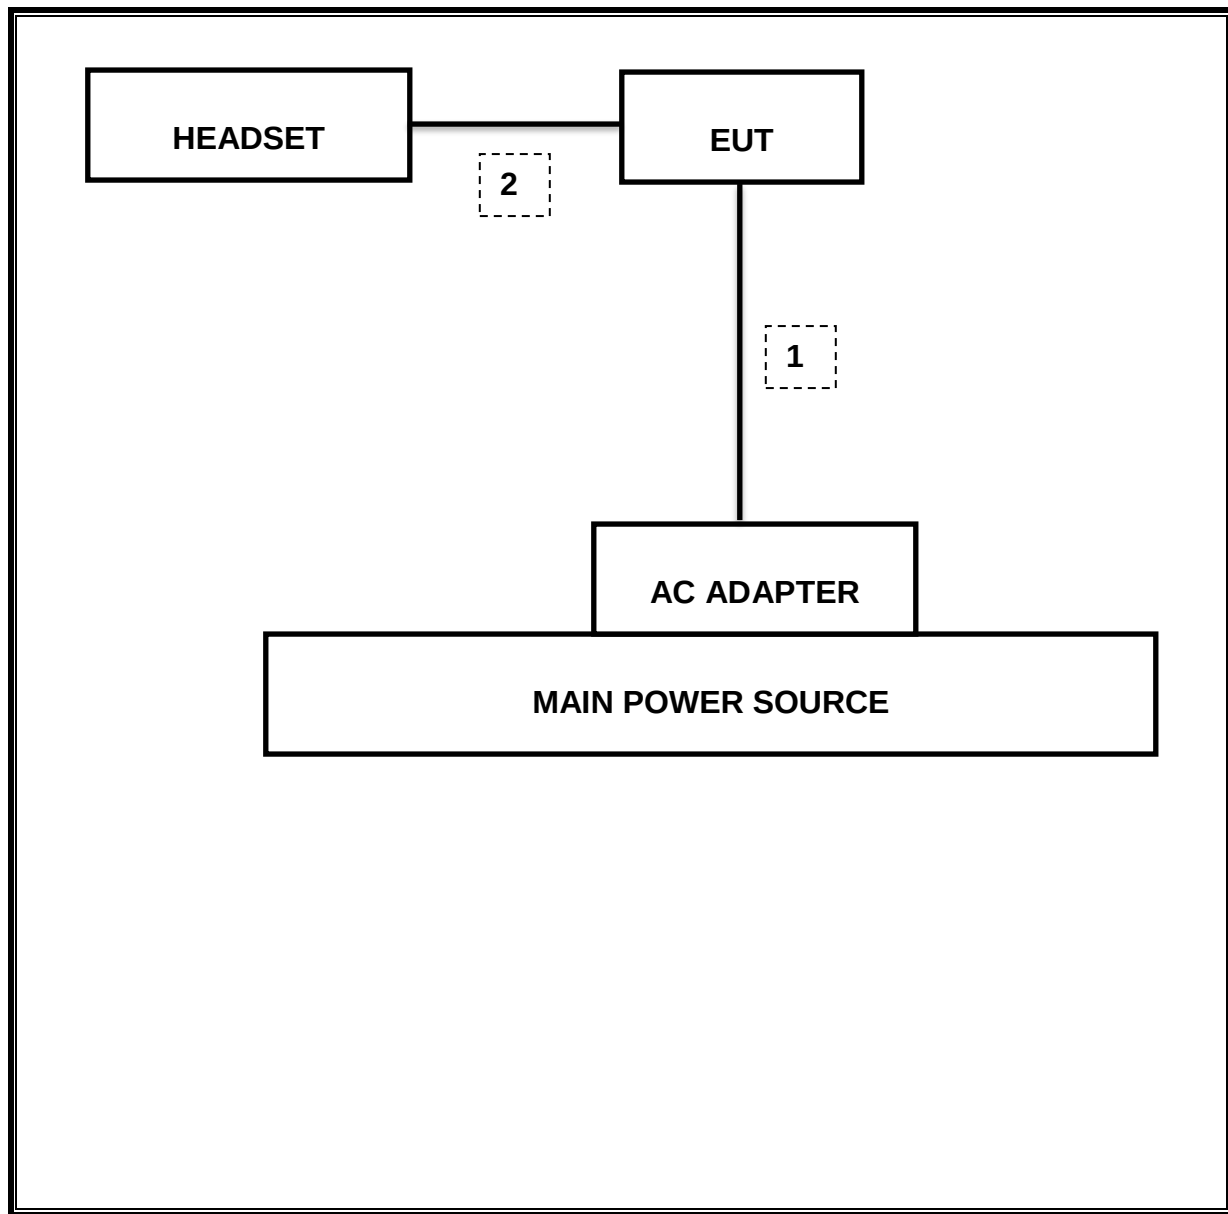

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier	ETS	3115-PA	00167475	08-09-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
ATTENUATOR	PASTERNAK	PE7087-10	A009	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-08-18
LISN	R&S	ENV-216	101837	08-09-18
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8Ghz)	500KHz		2.585 MHz (Straddle Ch.)
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		12.495 dBm
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		12.431 dBm
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		3.06 dBm
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		0.13 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	57.04 dBuV (Pk)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		65.85 dBuV/m (Pk)
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	Pass

8. REFERENCE MEASUREMENTS RESULTS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 D02 v01r03 Zero-Span Spectrum Analyzer Method.


8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	1.427	1.531	0.932	93.2%	0.31	0.701
802.11n HT20	1.336	1.439	0.928	92.8%	0.32	0.749
802.11n HT40	0.664	0.765	0.867	86.7%	0.62	1.507
802.11ac VHT80	0.332	0.433	0.766	76.6%	1.16	3.015

8.2. DUTY CYCLE PLOTS

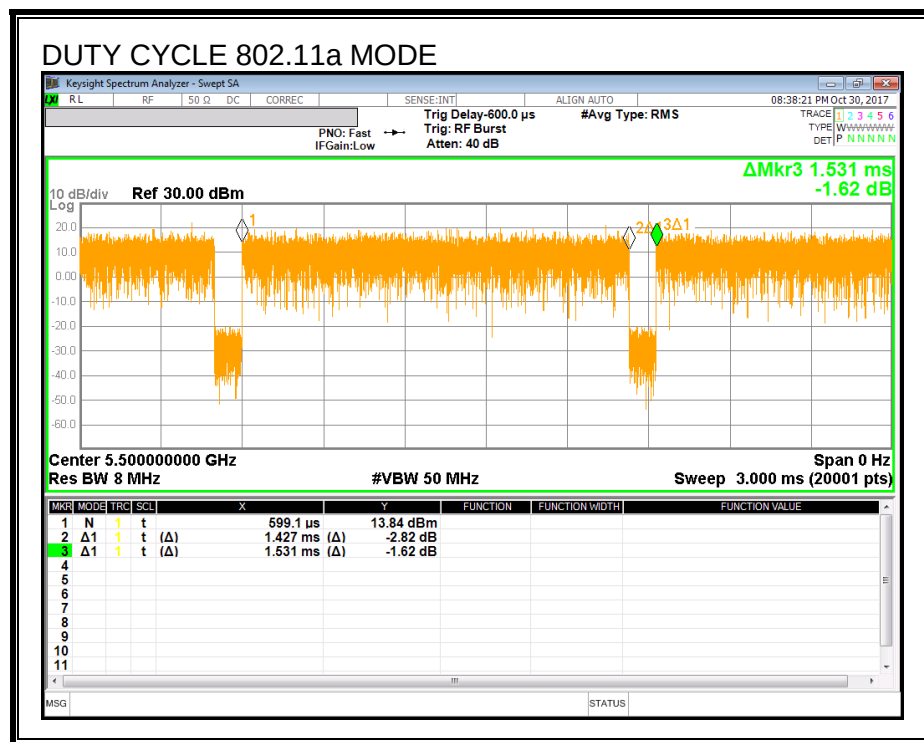

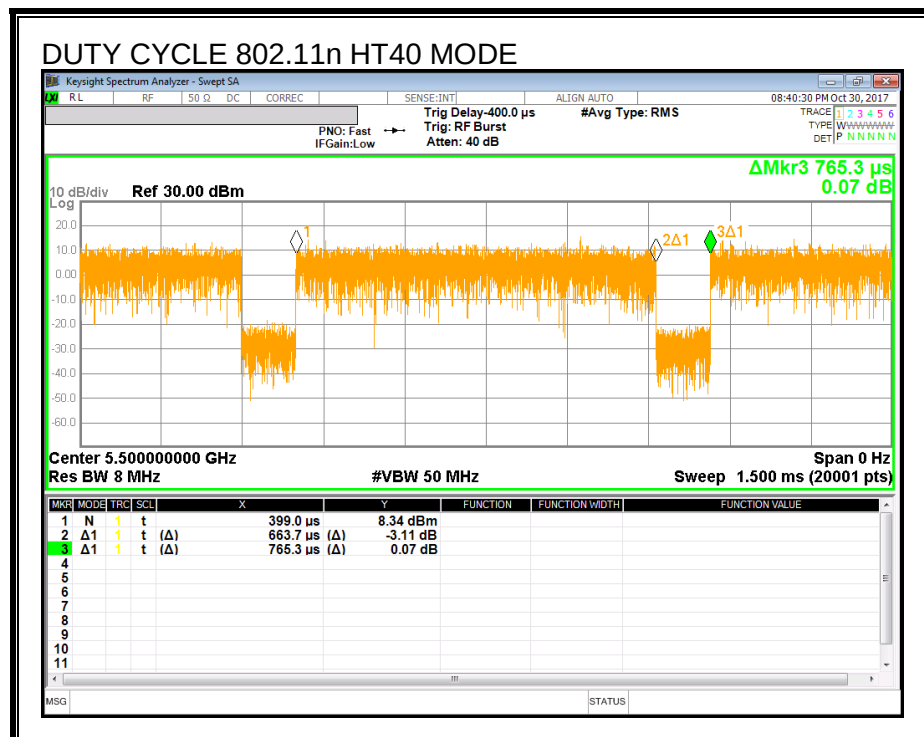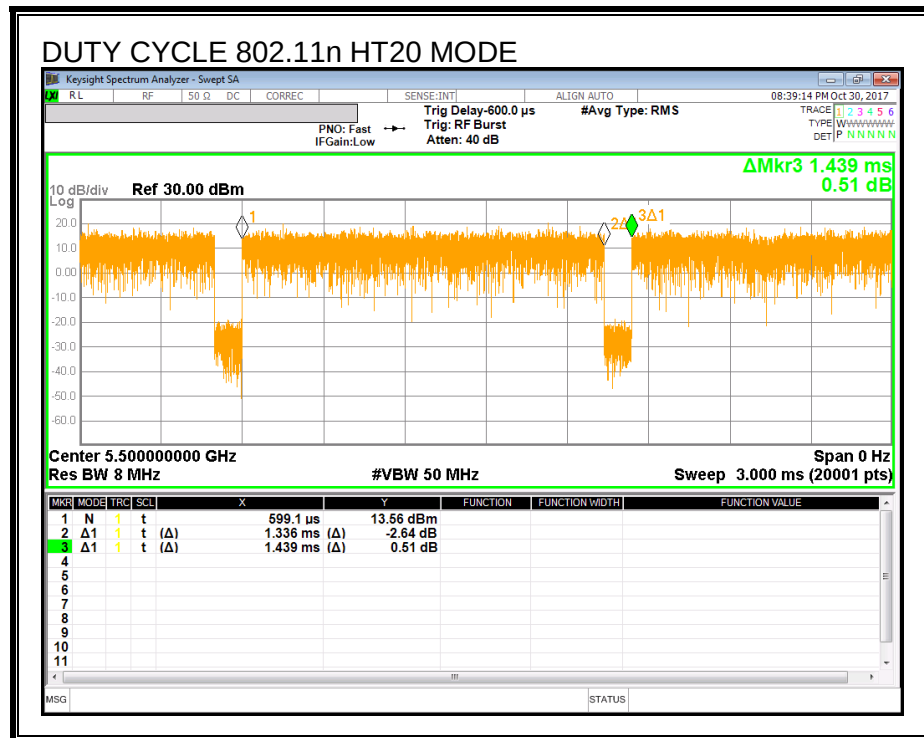

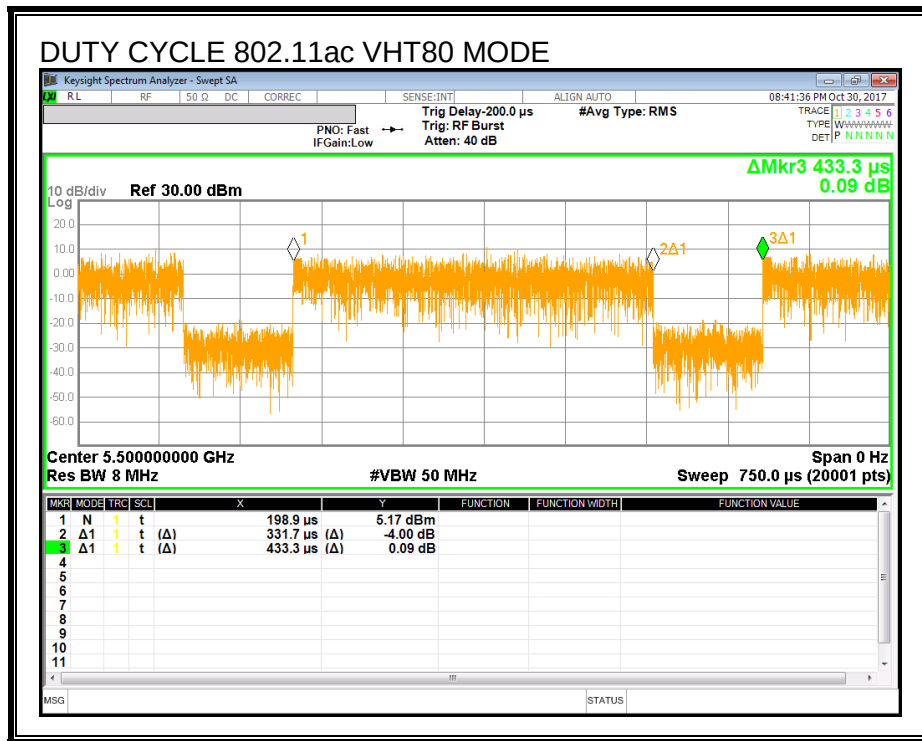

8.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01r03: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 21.00MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (21.00 / 2))) = 15.50 \text{ MHz}$
- 26dB Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

8.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	20.81
Mid	5200	20.84
High	5240	21.02
Worst		21.02

8.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	21.25
Mid	5200	21.39
High	5240	21.46
Worst		21.46

8.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5190	39.39
High	5230	39.49
Worst		39.49

8.3.4. 802.11n VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Mid	5210	80.96
Worst		80.96

8.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	20.80
Mid	5300	21.02
High	5320	20.76
Worst		21.02

8.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	21.08
Mid	5300	21.14
High	5320	21.05
Worst		21.14

8.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5270	39.35
High	5310	39.28
Worst		39.35

8.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Middle	5290	80.86
Worst		80.86

8.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	20.84
Mid	5580	21.00
High	5700	20.83
Straddle	5720	15.50
Worst		21.00

8.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	21.26
Mid	5580	21.11
High	5700	21.46
Straddle	5720	15.83
Worst		21.46

8.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5510	39.19
Mid	5590	39.59
High	5670	39.45
Straddle	5710	34.86
Worst		39.59

8.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth
		[MHz]
Low	5530	80.82
High	5610	81.20
Straddle	5690	75.50
Worst		80.82

8.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	5.50
Low	5745	21.18
Mid	5785	20.74
High	5825	21.00
Worst		21.18

8.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	5.83
Low	5745	21.61
Mid	5785	21.33
High	5825	21.22
Worst		21.61

8.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5710	4.86
Low	5755	39.13
High	5795	39.39
Worst		39.39


8.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5690	5.50
Middle	5775	81.05
Worst		81.05


8.3.17. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

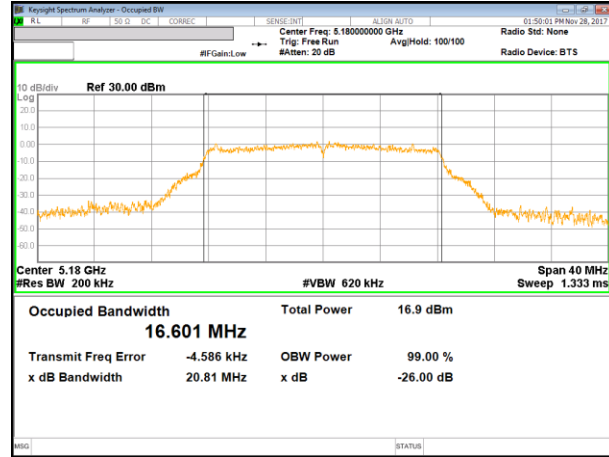

11a Mode Middle Channel

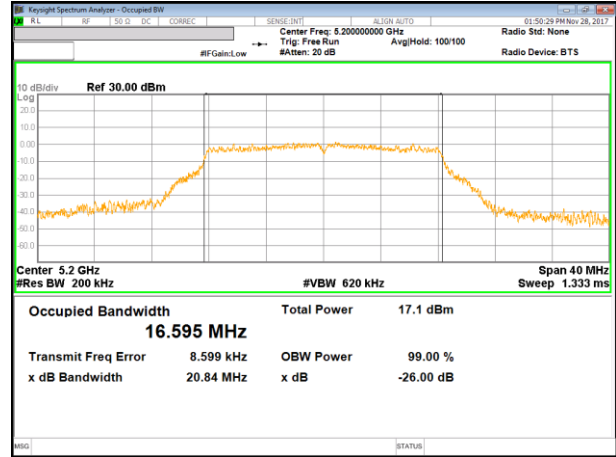


11a Mode High Channel

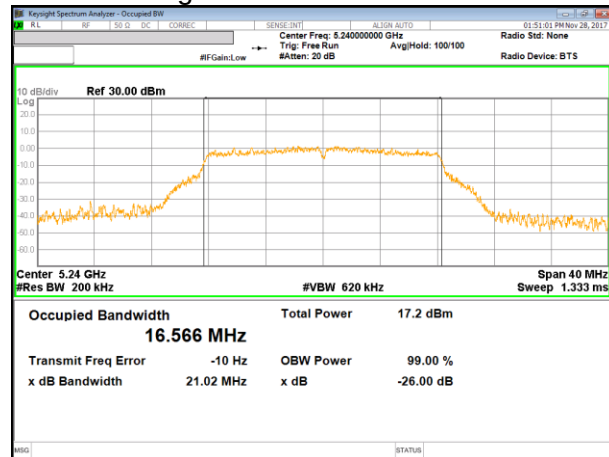


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

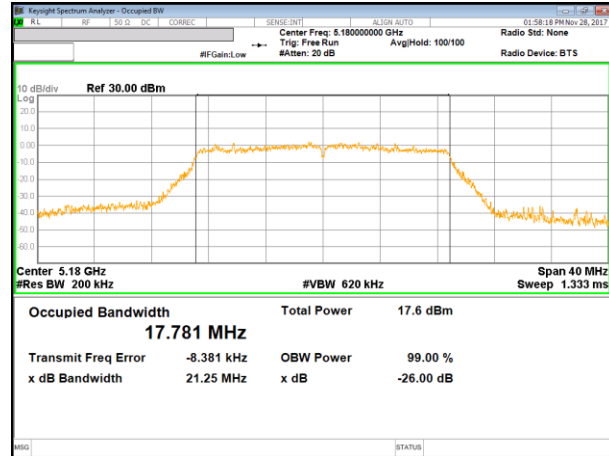

11n HT20 Mode Middle Channel

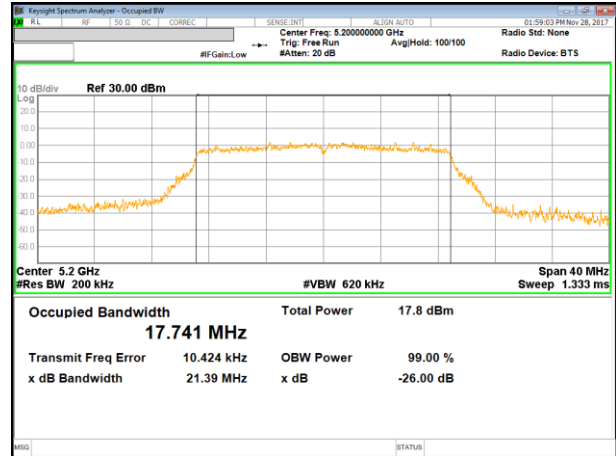


11n HT20 Mode High Channel

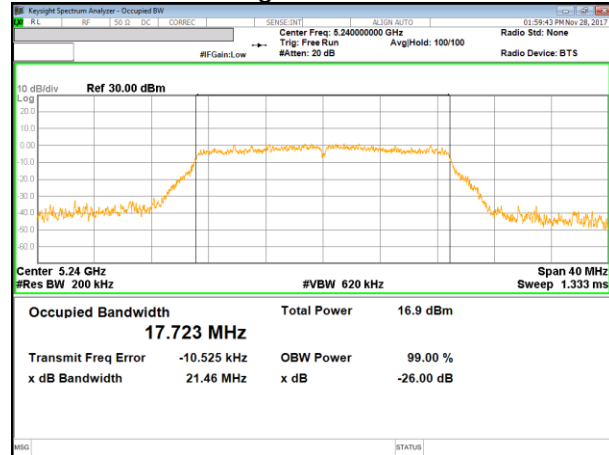


UNII 5.2 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

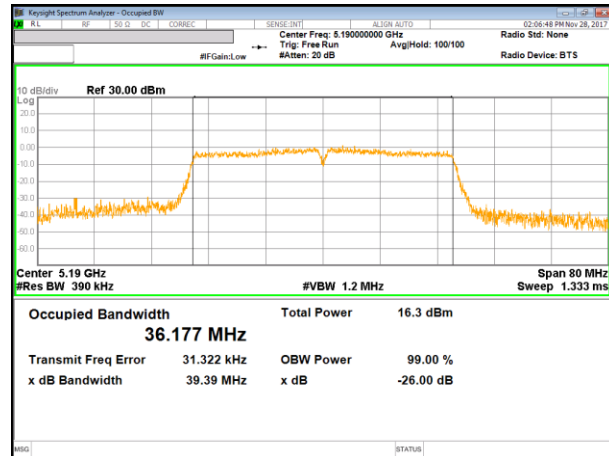


11n HT40 Mode High Channel

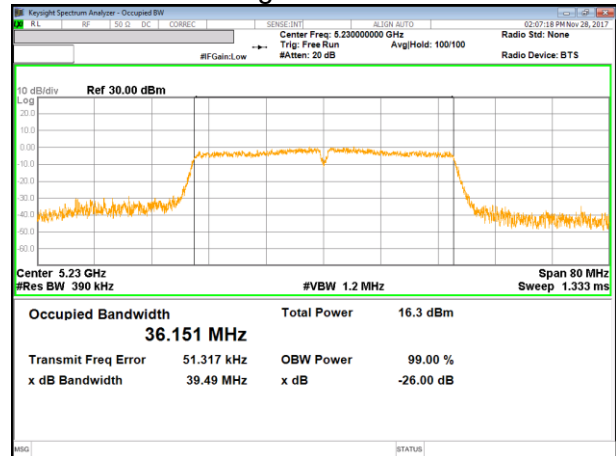


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

11ac VHT80 Mode Middle Channel

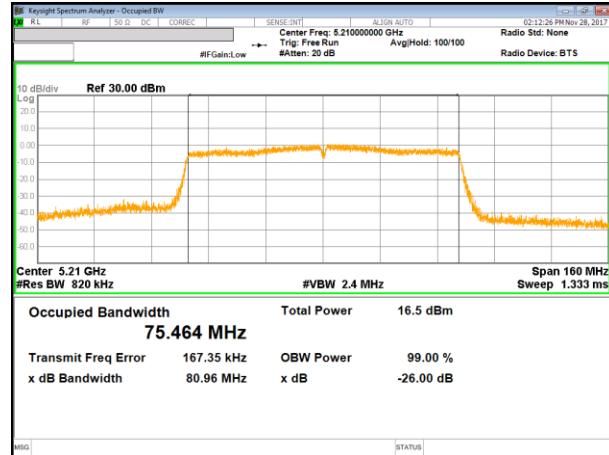


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

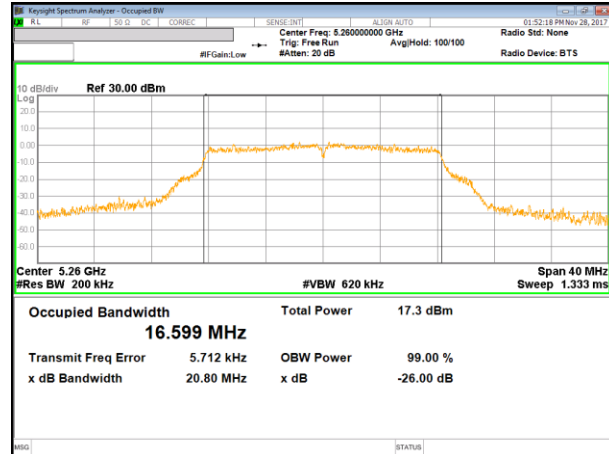

11a Mode Middle Channel

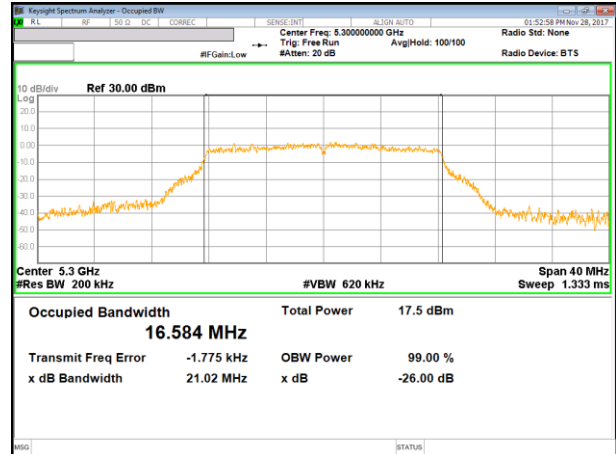


11a Mode High Channel

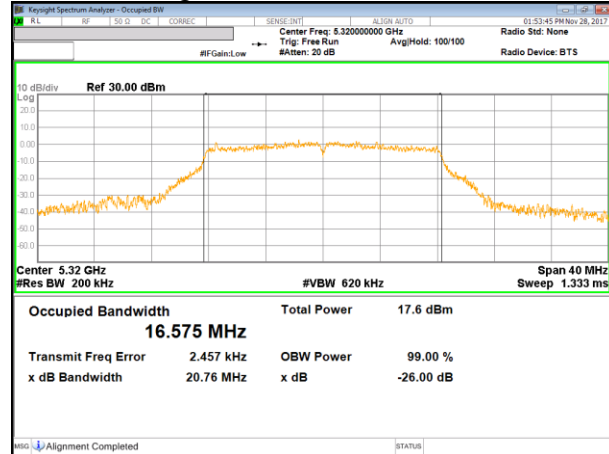


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

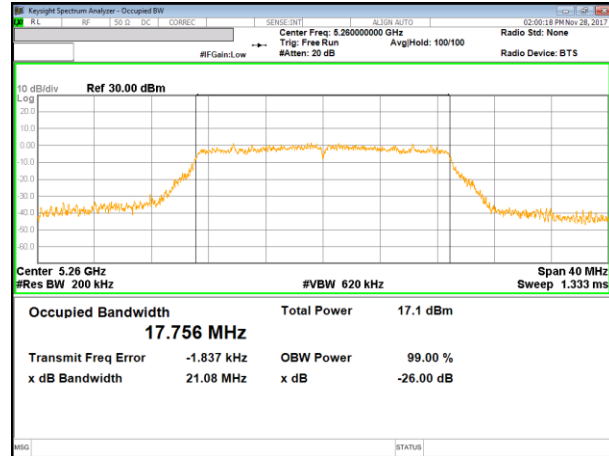

11n HT20 Mode Middle Channel

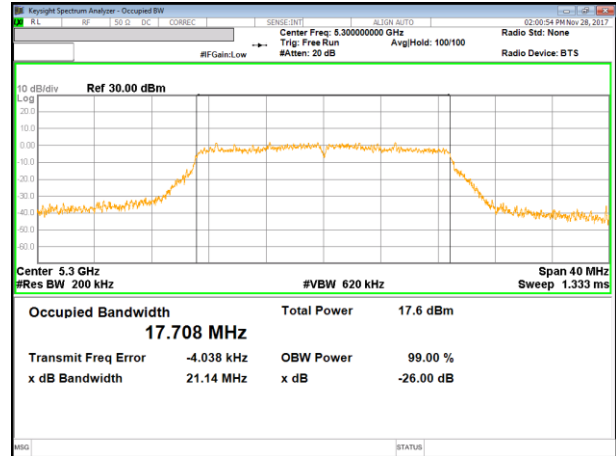


11n HT20 Mode High Channel

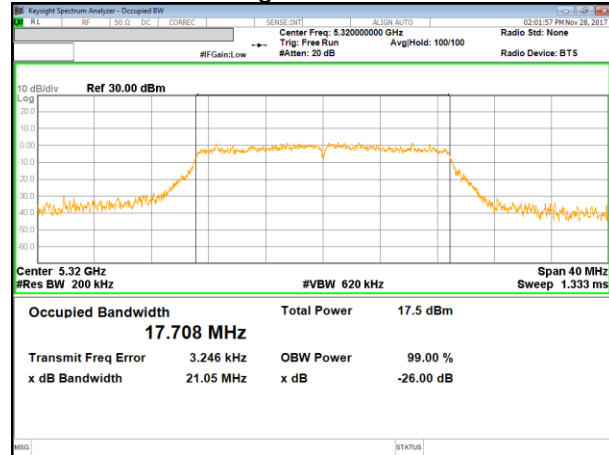


UNII 5.3 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

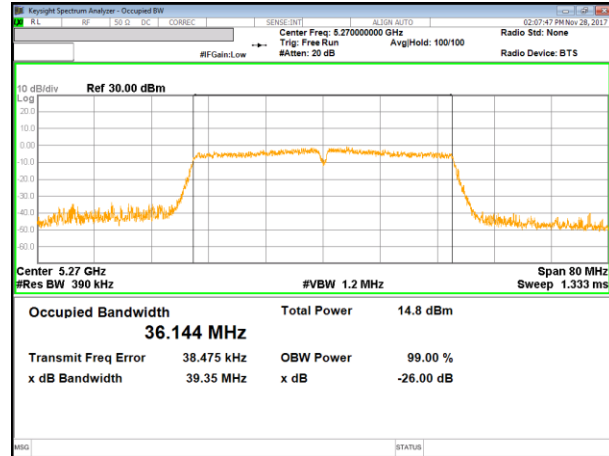


11n HT40 Mode High Channel

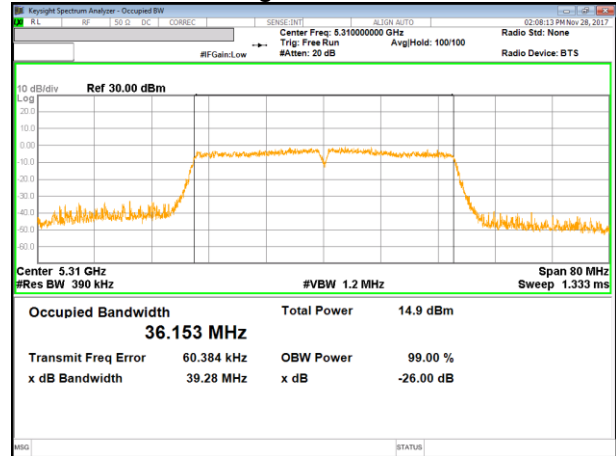


UNII 5.3 GHz IEEE 802.11ac VHT80 mode

11ac VHT80 Mode Middle Channel

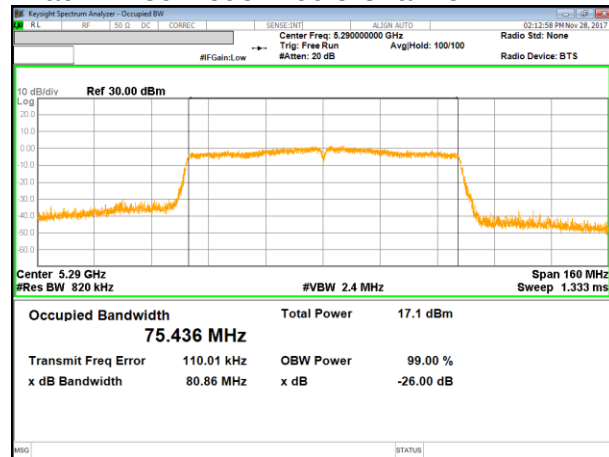


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

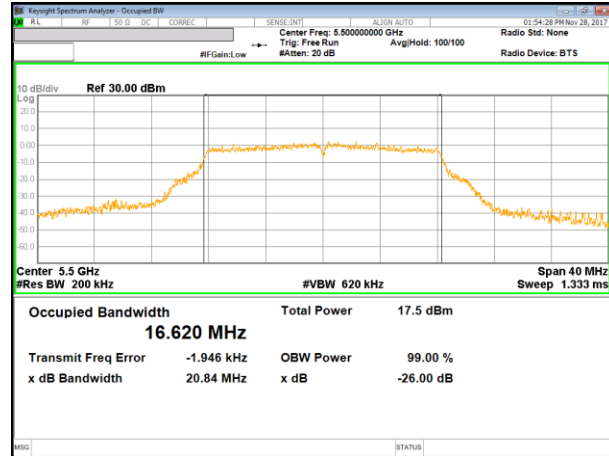


11a Mode Middle Channel

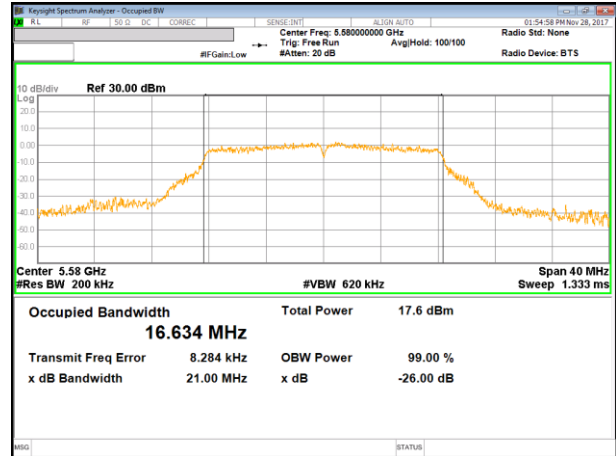

11a Mode High Channel

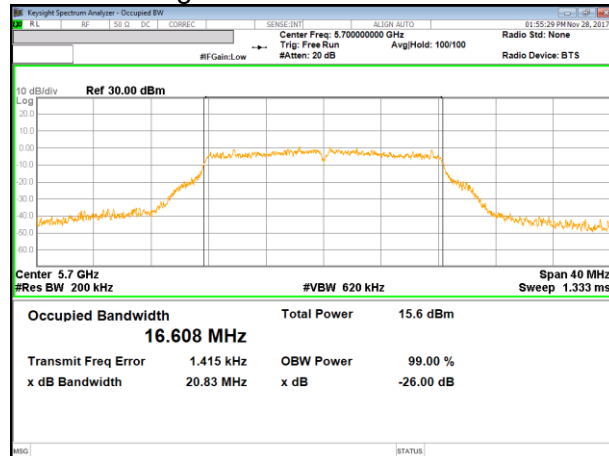


11a Mode Straddle Channel

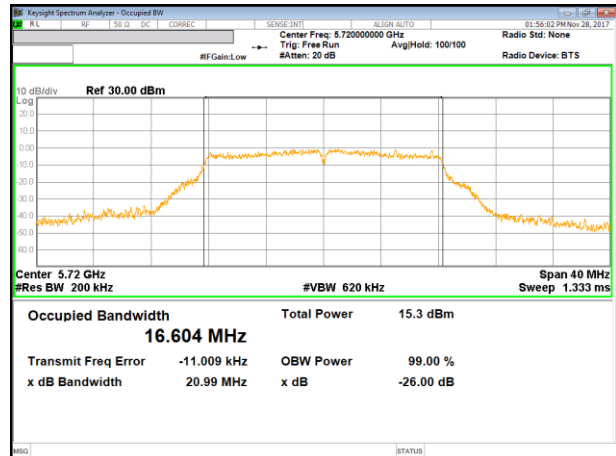


UNII 5.5 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

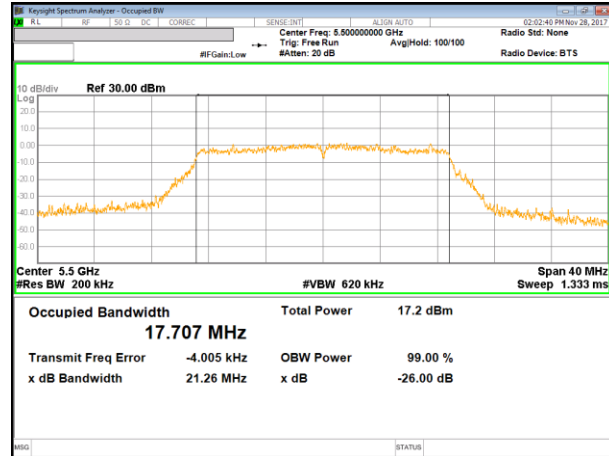


11n HT20 Mode Middle Channel

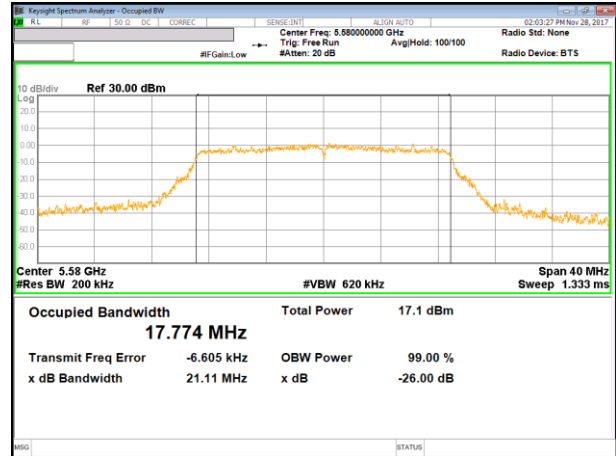

11n HT20 Mode High Channel

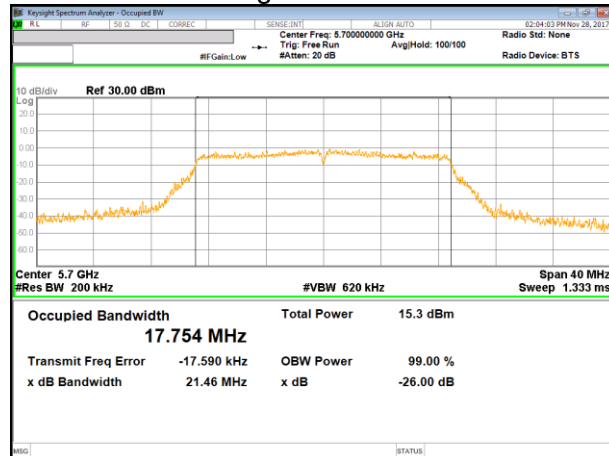


11n HT20 Mode Straddle Channel

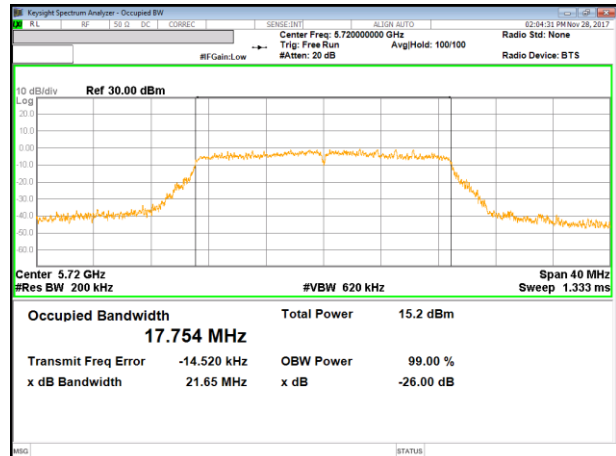


UNII 5.5 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

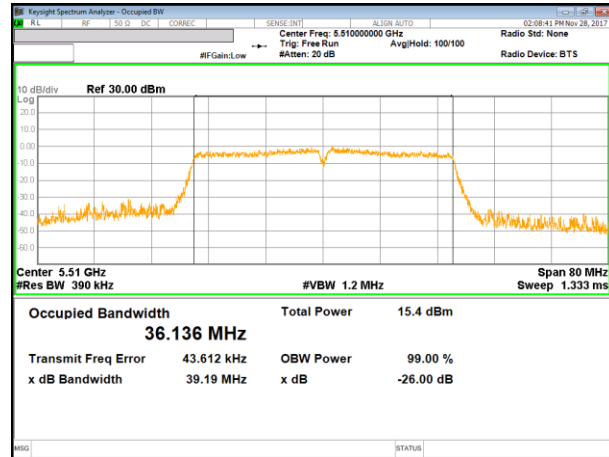


11n HT40 Mode Middle Channel

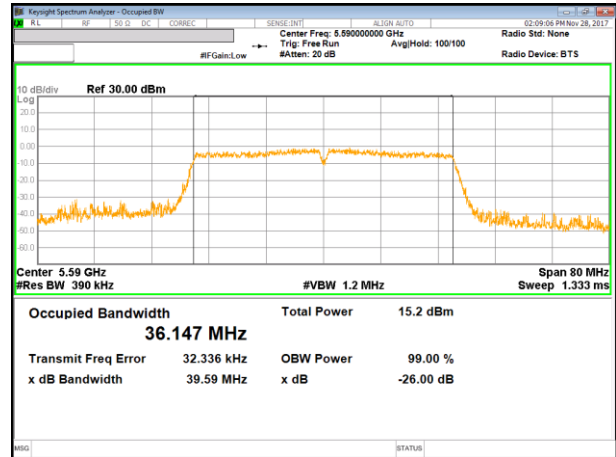

11n HT40 Mode High Channel

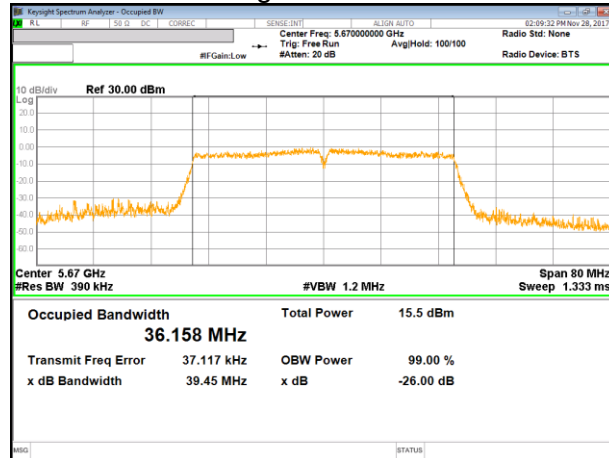


11n HT40 Mode Straddle Channel

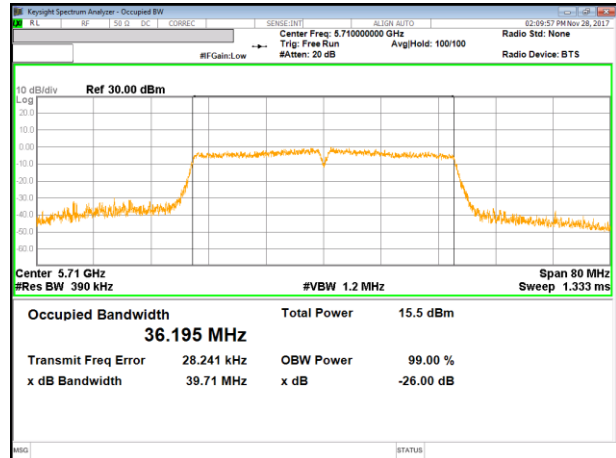


UNII 5.5 GHz IEEE 802.11ac VHT80 mode


11ac VHT80 Mode Low Channel

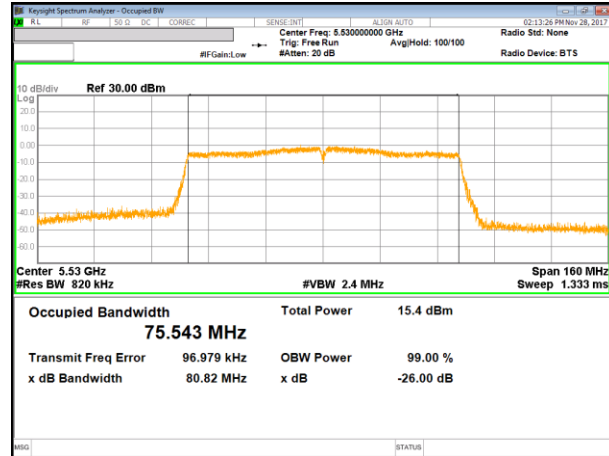

11ac VHT80 Mode High Channel

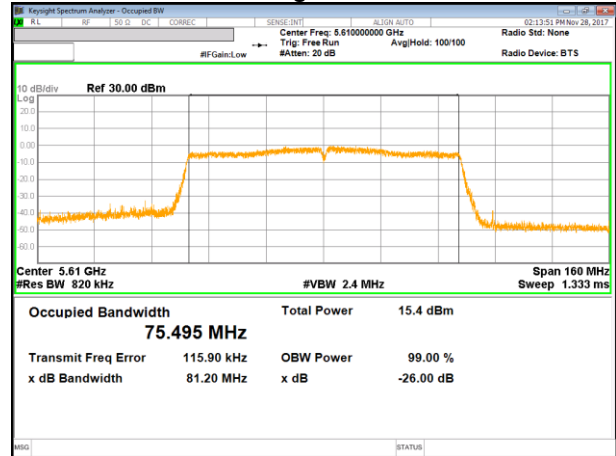


11ac VHT80 Mode Straddle Channel

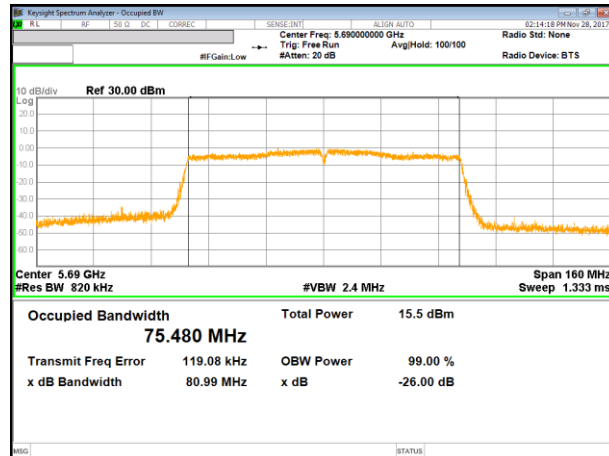


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Straddle Channel

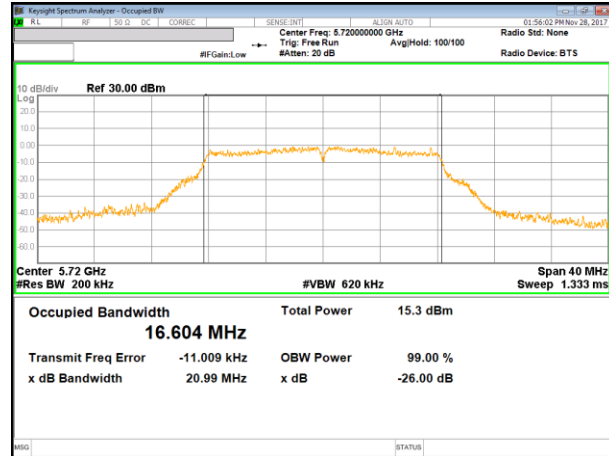


11a Mode Low Channel

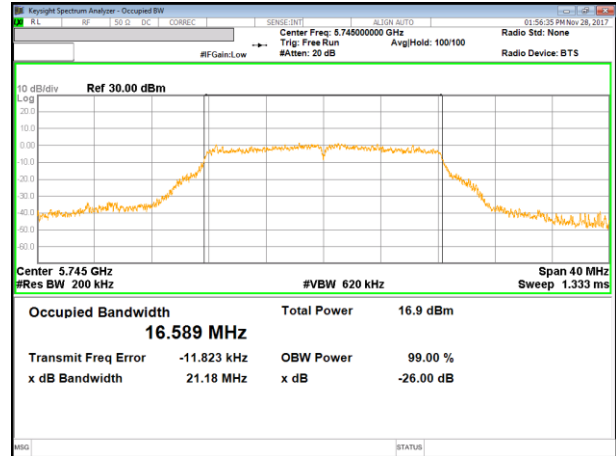

11a Mode Middle Channel

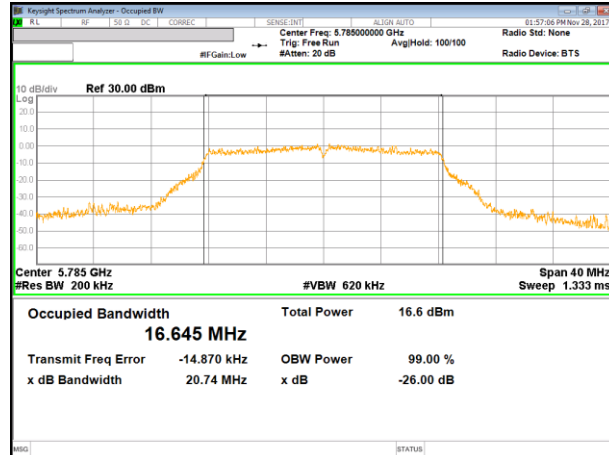


11a Mode High Channel

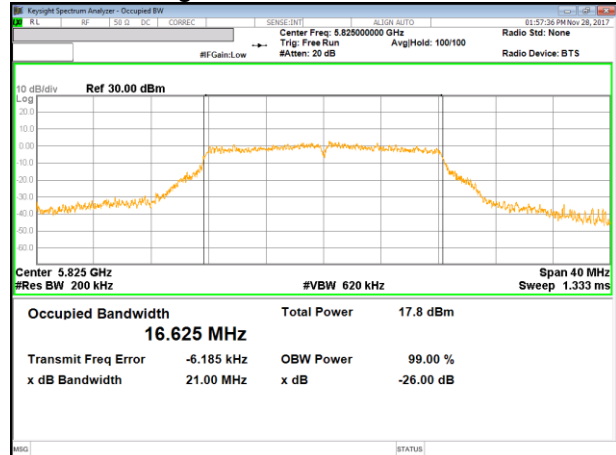


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Straddle Channel

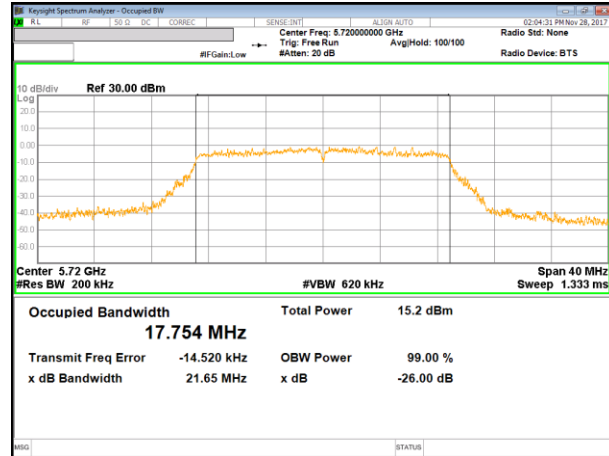


11n HT20 Mode Low Channel

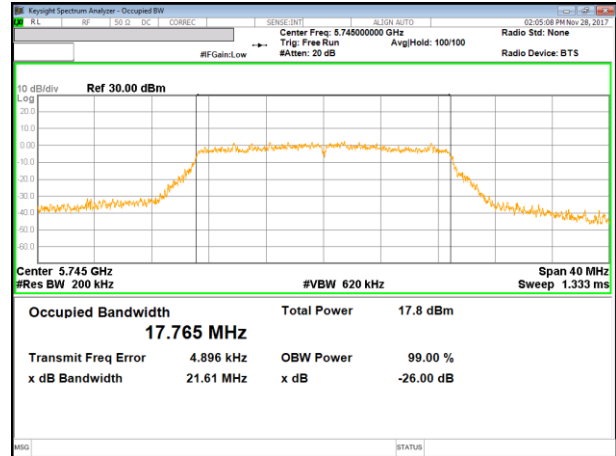

11n HT20 Mode Middle Channel

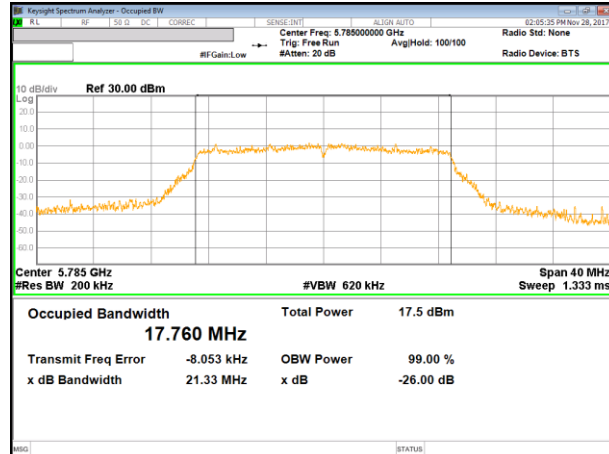


11n HT20 Mode High Channel

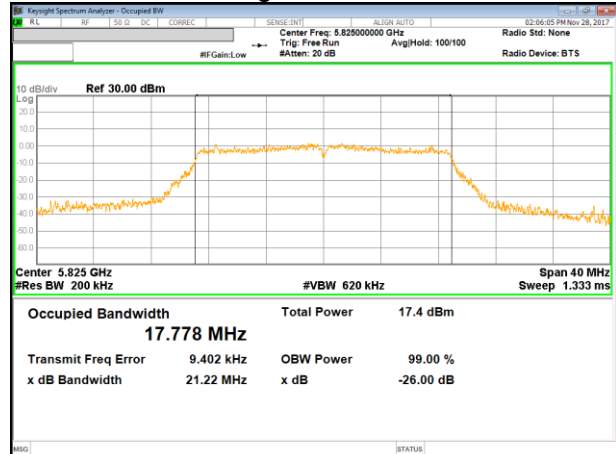


UNII 5.8 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Straddle Channel

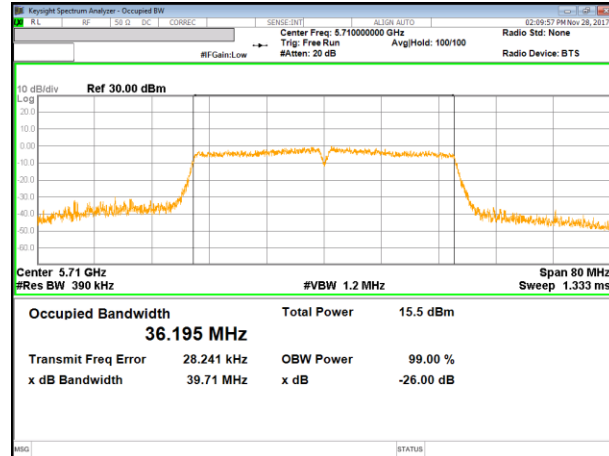


11n HT40 Mode Low Channel

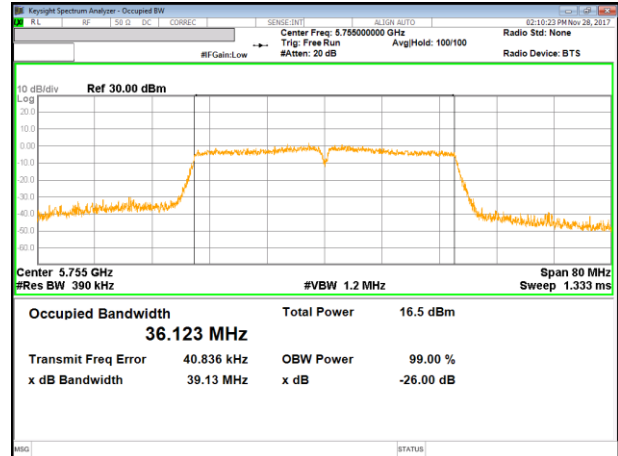

11n HT40 Mode High Channel

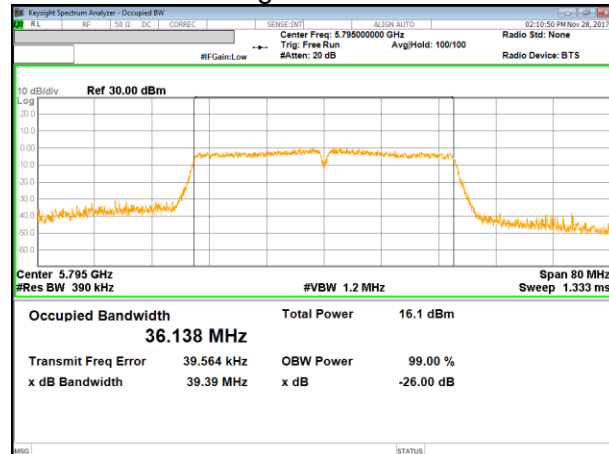

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

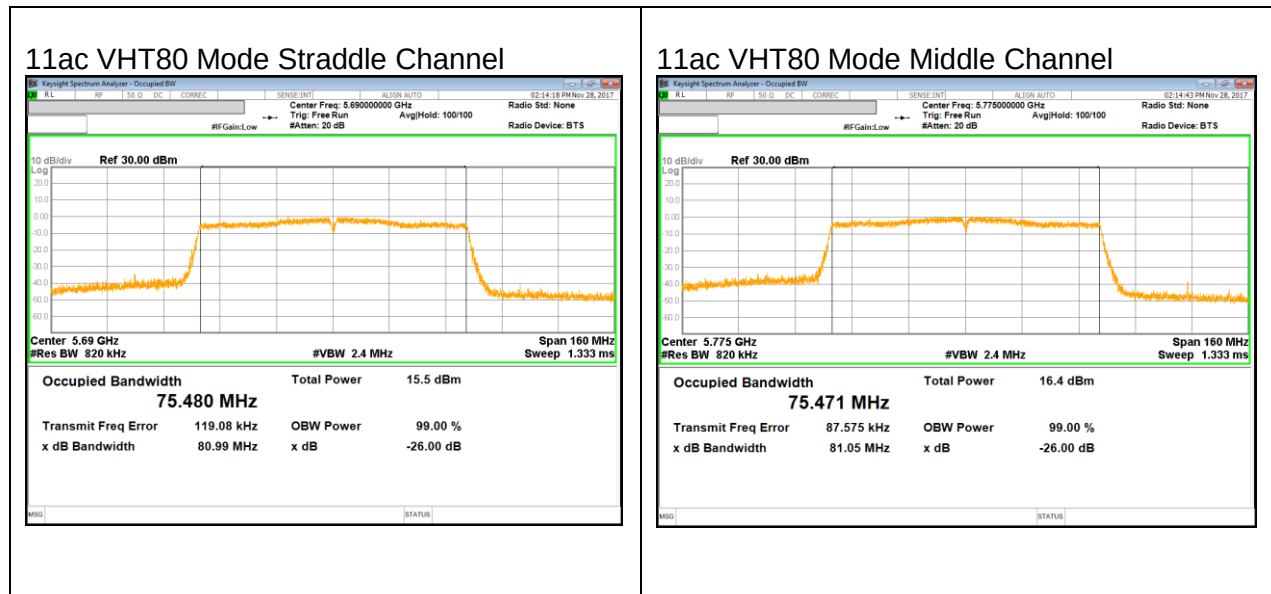

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01r03: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

NOTE

- Calculation for 6dB Bandwidth of UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 6dB BW : 16.350MHz
- Starting Frequency of UNII-3 band : 5725MHz
- 6dB Bandwidth of UNII-3 band Portion
 $= (5720 + (16.350 / 2) - 5725) = 3.175 \text{ MHz}$

RESULTS

9.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	3.155	0.5
Low	5745	16.310	0.5
Mid	5785	16.310	0.5
High	5825	16.320	0.5
Worst		3.155	

9.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	3.630	0.5
Low	5745	17.530	0.5
Mid	5785	17.260	0.5
High	5825	17.350	0.5
Worst		3.630	

9.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5710	2.890	0.5
Low	5755	35.350	0.5
High	5795	35.290	0.5
Worst		2.890	


9.1.4. 802.11n VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth [MHz]	Minimum Limit
Straddle	5690	2.585	0.5
Middle	5775	75.150	0.5
Worst		2.585	


9.1.5. 6 dB BANDWIDTH PLOTS

UNII 5.8 GHz IEEE 802.11a mode


11a Mode Straddle Channel

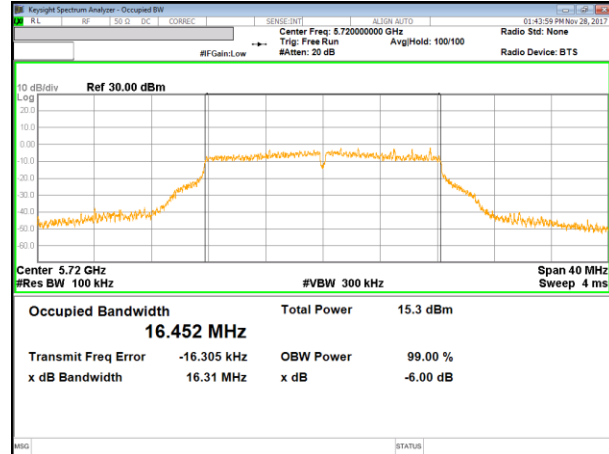


11a Mode Low Channel

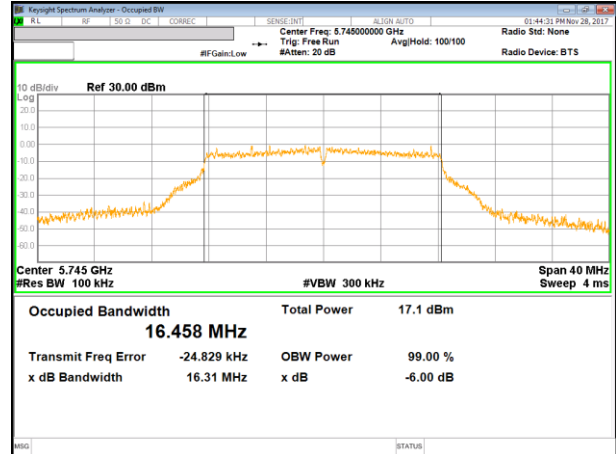

11a Mode Middle Channel

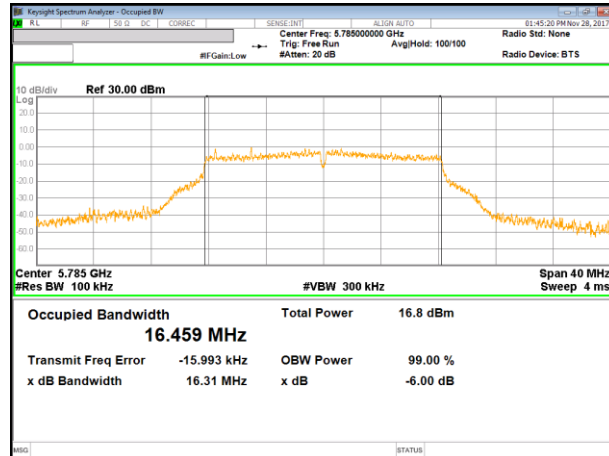


11a Mode High Channel

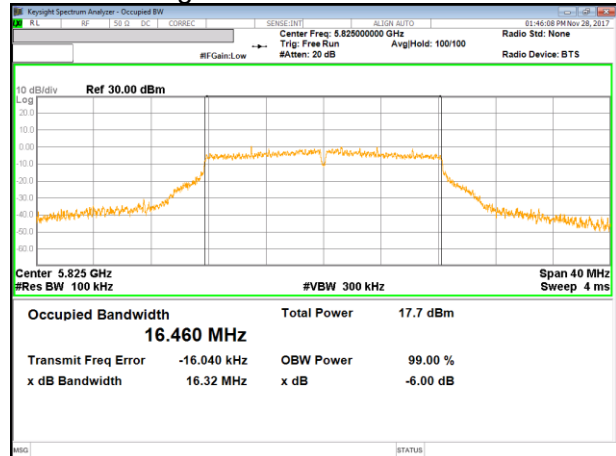


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Straddle Channel

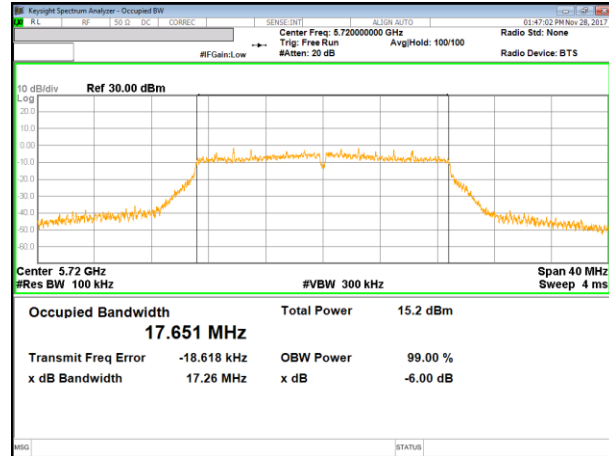


11n HT20 Mode Low Channel

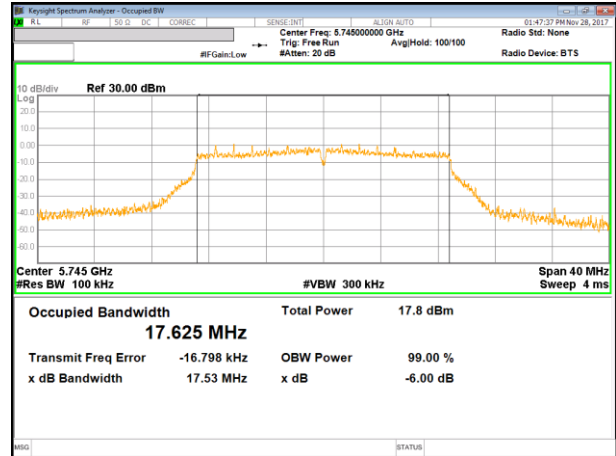

11n HT20 Mode Middle Channel

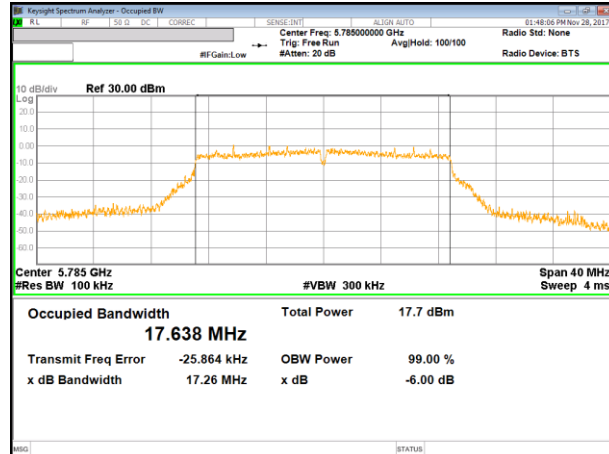


11n HT20 Mode High Channel

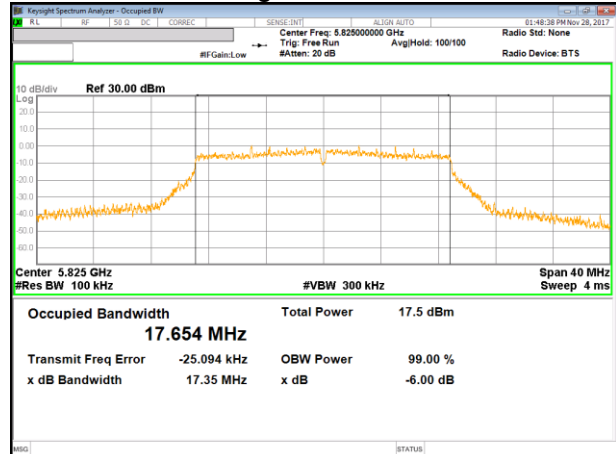


UNII 5.8 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Straddle Channel

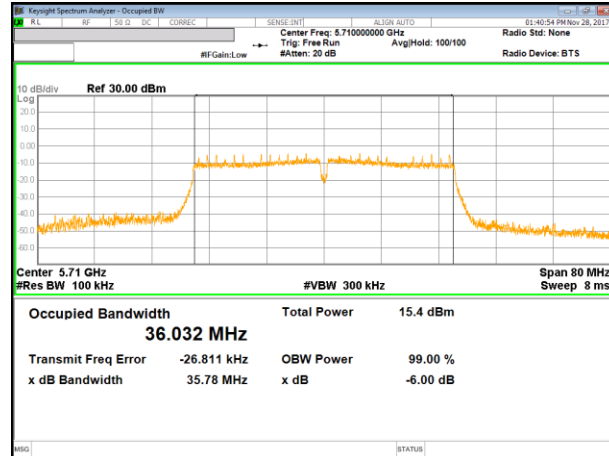


11n HT40 Mode Low Channel

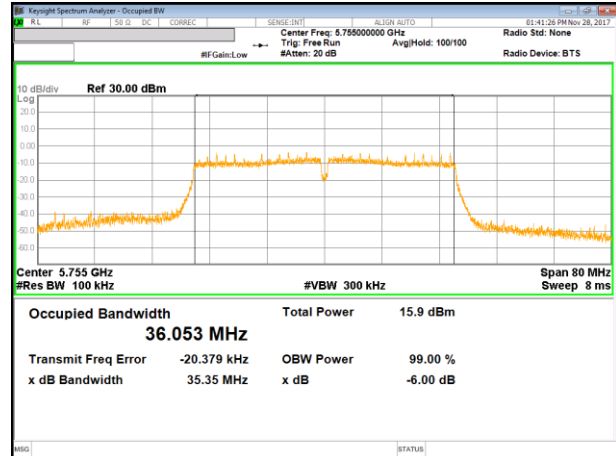

11n HT40 Mode High Channel

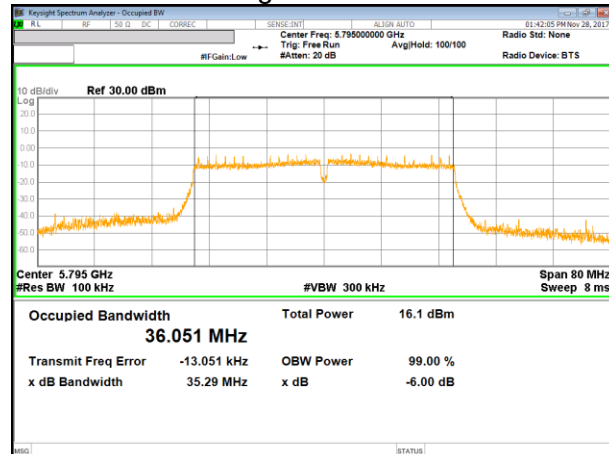

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

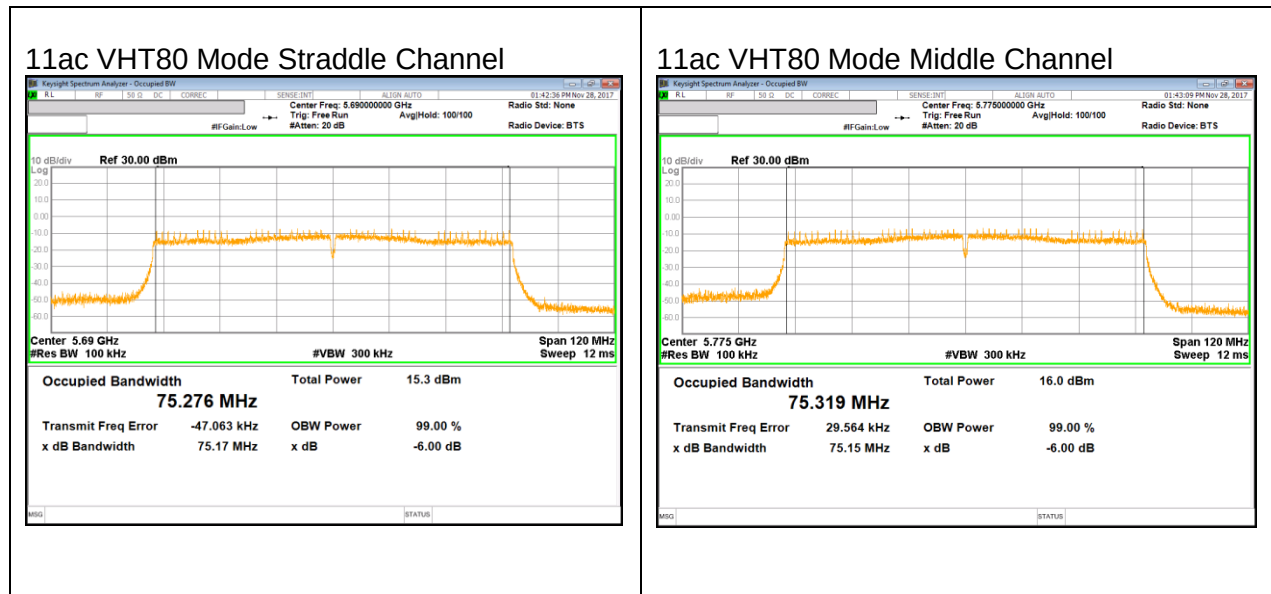

9.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

TEST PROCEDURE

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD. RBW set to 1MHz (500kHz for the band 5.725-5.85 GHz, the VBW $\geq 3 \times$ RBW, RMS detector and trace averaging). Band power function used for power and peak marker value of the spectrum is used for PSD. Add duty cycle correction factor.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

5 GHz

Frequency Band [MHz]	Antenna Gain [dBi]
5150 - 5250	-0.70
5250 - 5350	-0.50
5470 - 5725	-0.10
5725 - 5850	-0.10

RESULTS

9.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	20.81	-0.70	-0.70
Mid	5200	20.84	-0.70	-0.70
High	5240	21.02	-0.70	-0.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	24.00	24.00	11.00
Mid	5200	24.00	24.00	11.00
High	5240	24.00	24.00	11.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	11.48	11.78	24.00	-12.22
Mid	5200	11.38	11.69	24.00	-12.31
High	5240	11.56	11.86	24.00	-12.14

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	1.80	2.10	11.00	-8.90
Mid	5200	1.88	2.19	11.00	-8.81
High	5240	2.00	2.31	11.00	-8.69

9.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	21.25	-0.70	-0.70
Mid	5200	21.39	-0.70	-0.70
High	5240	21.46	-0.70	-0.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	24.00	24.00	11.00
Mid	5200	24.00	24.00	11.00
High	5240	24.00	24.00	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	12.01	12.33	24.00	-11.67
Mid	5200	12.17	12.49	24.00	-11.51
High	5240	11.38	11.70	24.00	-12.30

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	2.32	2.64	11.00	-8.36
Mid	5200	2.37	2.69	11.00	-8.31
High	5240	1.64	1.96	11.00	-9.04

9.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5190	39.39	-0.70	-0.70
High	5230	39.49	-0.70	-0.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5190	24.00	24.00	11.00
High	5230	24.00	24.00	11.00

Duty Cycle CF [dB]	0.62	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5190	9.84	10.46	24.00	-13.54
High	5230	10.03	10.65	24.00	-13.35

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5190	-2.79	-2.18	11.00	-13.18
High	5230	-2.31	-1.69	11.00	-12.69

9.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Middle	5210	80.96	-0.70	-0.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Middle	5210	24.00	24.00	11.00

Duty Cycle CF [dB]	1.16	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Middle	5210	9.222	10.38	24.00	-13.62

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Middle	5210	-5.79	-4.63	11.00	-15.63

9.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	20.80	-0.50	-0.50
Mid	5300	21.02	-0.50	-0.50
High	5320	20.76	-0.50	-0.50

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5260	24.00	24.00	11.00
Mid	5300	24.00	24.00	11.00
High	5320	24.00	24.00	11.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	11.80	12.11	24.00	-11.89
Mid	5300	12.06	12.36	24.00	-11.64
High	5320	12.07	12.38	24.00	-11.62

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5260	2.47	2.78	11.00	-8.22
Mid	5300	2.59	2.90	11.00	-8.10
High	5320	2.37	2.67	11.00	-8.33

9.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	21.08	-0.50	-0.50
Mid	5300	21.14	-0.50	-0.50
High	5320	21.05	-0.50	-0.50

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5260	24.00	24.00	11.00
Mid	5300	24.00	24.00	11.00
High	5320	24.00	24.00	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	11.63	11.95	24.00	-12.05
Mid	5300	11.83	12.16	24.00	-11.84
High	5320	11.70	12.02	24.00	-11.98

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5260	2.00	2.33	11.00	-8.67
Mid	5300	1.77	2.09	11.00	-8.91
High	5320	1.78	2.10	11.00	-8.90

9.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5270	39.35	-0.50	-0.50
High	5310	39.28	-0.50	-0.50

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5270	24.00	24.00	11.00
High	5310	24.00	24.00	11.00

Duty Cycle CF [dB]	0.62	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5270	8.44	9.06	24.00	-14.94
High	5310	8.69	9.31	24.00	-14.69

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5270	-4.08	-3.46	11.00	-14.46
High	5310	-3.82	-3.20	11.00	-14.20

9.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Middle	5290	80.86	-0.50	-0.50

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	PPSP Limit [dBm]
Middle	5290	24.00	24.00	11.00

Duty Cycle CF [dB]	1.16	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Middle	5290	9.74	10.90	24.00	-13.10

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Middle	5290	-5.62	-4.46	11.00	-15.46

9.2.9. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5500	20.84	-0.10	-0.10
Mid	5580	21.00	-0.10	-0.10
High	5700	20.83	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5500	24.00	24.00	11.00
Mid	5580	24.00	24.00	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	12.03	12.34	24.00	-11.66
Mid	5580	12.05	12.35	24.00	-11.65
High	5700	9.98	10.29	24.00	-13.71

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5500	2.61	2.91	11.00	-8.09
Mid	5580	2.75	3.06	11.00	-7.94
High	5700	0.79	1.10	11.00	-9.90

9.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5500	21.26	-0.10	-0.10
Mid	5580	21.11	-0.10	-0.10
High	5700	21.46	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5500	24.00	24.00	11.00
Mid	5580	24.00	24.00	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	11.57	11.89	24.00	-12.11
Mid	5580	11.59	11.91	24.00	-12.09
High	5700	9.71	10.03	24.00	-13.97

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5500	1.86	2.19	11.00	-8.81
Mid	5580	1.68	2.00	11.00	-9.00
High	5700	-0.10	0.23	11.00	-10.77

9.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5510	39.19	-0.10	-0.10
Mid	5590	39.59	-0.10	-0.10
High	5670	39.45	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5510	24.00	24.00	11.00
Mid	5590	24.00	24.00	11.00
High	5670	24.00	24.00	11.00

Duty Cycle CF [dB]	0.62	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5510	9.25	9.87	24.00	-14.13
Mid	5590	9.28	9.90	24.00	-14.10
High	5670	9.19	9.81	24.00	-14.19

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5510	-3.59	-2.98	11.00	-13.98
Mid	5590	-3.43	-2.81	11.00	-13.81
High	5670	-3.43	-2.81	11.00	-13.81

9.2.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5530	80.82	-0.10	-0.10
High	5610	81.20	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5530	24.00	24.00	11.00
High	5610	24.00	24.00	11.00

Duty Cycle CF [dB]	1.16	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5530	8.31	9.47	24.00	-14.53
High	5610	8.35	9.51	24.00	-14.49

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5530	-7.02	-5.86	11.00	-16.86
High	5610	-7.18	-6.02	11.00	-17.02

9.2.13. 802.11a MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5745	21.18	-0.10	-0.10
Mid	5785	20.74	-0.10	-0.10
High	5825	21.00	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5745	24.00	24.00	30.00
Mid	5785	24.00	24.00	30.00
High	5825	24.00	24.00	30.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	11.38	11.68	24.00	-12.32
Mid	5785	11.36	11.66	24.00	-12.34
High	5825	12.13	12.43	24.00	-11.57

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5745	-1.01	-0.70	30.00	-30.70
Mid	5785	-1.13	-0.83	30.00	-30.83
High	5825	-0.18	0.13	30.00	-29.87

9.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5745	21.61	-0.10	-0.10
Mid	5785	21.33	-0.10	-0.10
High	5825	21.22	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5745	24.00	24.00	30.00
Mid	5785	24.00	24.00	30.00
High	5825	24.00	24.00	30.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	12.07	12.39	24.00	-11.61
Mid	5785	11.83	12.15	24.00	-11.85
High	5825	11.74	12.06	24.00	-11.94

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5745	-0.62	-0.30	30.00	-30.30
Mid	5785	-0.97	-0.64	30.00	-30.64
High	5825	-1.11	-0.79	30.00	-30.79

9.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5755	39.13	-0.10	-0.10
High	5795	39.39	-0.10	-0.10

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5755	24.00	24.00	30.00
High	5795	24.00	24.00	30.00

Duty Cycle CF [dB]	0.62	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5755	9.80	10.42	24.00	-13.58
High	5795	9.71	10.33	24.00	-13.67

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5755	-5.18	-4.56	30.00	-34.56
High	5795	-5.48	-4.86	30.00	-34.86

9.2.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency	Min	Directional Gain for Power	Directional Gain for PPSP
	[MHz]	26 dB BW [MHz]	[dBi]	[dBi]
Middle	5775	80.99	-0.10	-0.10

Limits

Channel	Frequency	FCC Power Limit	Power Limit	FCC PPSP Limit
	[MHz]	[dBm]	[dBm]	[dBm]
Middle	5775	24.00	24.00	30.00

Duty Cycle CF [dB]	1.16	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency	Meas Power	Total Corr'd Power	Power Limit	Power Margin
	[MHz]	[dBm]	[dBm]	[dBm]	[dB]
Middle	5775	9.13	10.29	24.00	-13.71

PPSP Results

Channel	Frequency	Meas PPSP	Total Corr'd PPSP	PPSP Limit	PPSP Margin
	[MHz]	[dBm]	[dBm]	[dBm]	[dB]
Middle	5775	-9.20	-8.03	30.00	-38.03

9.2.17. 802.11a MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
UNII-2C	5720	15.49	-0.10	-0.10
UNII-3	5720	5.49	-0.10	-0.10
Whole	5720	20.99	-0.10	-0.10

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
UNII-2C	5720	22.90	22.90	11.00
UNII-3	5720	18.40	18.40	11.00
Whole	5720	24.00	24.00	11.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	9.24	9.54	22.90	-13.36
UNII-3	5720	1.66	1.97	18.40	-16.43
Whole	5720	9.94	10.24	24.00	-13.76

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
144	5720	0.63	0.93	11.00	-10.07

9.2.18. 802.11n HT20 MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
UNII-2C	5720	15.82	-0.10	-0.10
UNII-3	5720	5.82	-0.10	-0.10
Whole	5720	21.65	-0.10	-0.10

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
UNII-2C	5720	22.99	22.99	11.00
UNII-3	5720	18.65	18.65	11.00
Whole	5720	24.00	24.00	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	8.89	9.21	22.99	-13.78
UNII-3	5720	2.23	2.55	18.65	-16.10
Whole	5720	9.74	10.06	24.00	-13.94

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
144	5720	-0.24	0.09	11.00	-10.91

9.2.19. 802.11n HT40 MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5710	34.85	-0.10	-0.10
UNII-3	5710	4.85	-0.10	-0.10
Whole	5710	39.71	-0.10	-0.10

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
UNII-2C	5710	24.00	24.00	11.00
UNII-3	5710	17.86	17.86	11.00
Whole	5710	24.00	24.00	11.00

Duty Cycle CF [dB]	0.62	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5710	8.71	9.33	24.00	-14.67
UNII-3	5710	-2.46	-1.84	17.86	-19.71
Whole	5710	9.03	9.65	24.00	-14.35

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
142	5710	-3.63	-3.01	11.00	-14.01

9.2.20. 802.11ac80 VHT80 MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
UNII-2C	5690	75.49	-0.10	-0.10
UNII-3	5690	5.49	-0.10	-0.10
Whole	5690	80.99	-0.10	-0.10

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
UNII-2C	5690	24.00	24.00	11.00
UNII-3	5690	18.40	19.29	11.00
Whole	5690	24.00	24.00	11.00

Duty Cycle CF [dB]	1.16	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5690	8.08	9.24	24.00	-14.76
UNII-3	5690	-6.66	-5.49	19.29	-24.78
Whole	5690	8.23	9.39	24.00	-14.61


PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
138	5690	-7.28	-6.12	11.00	-17.12


9.2.21. OUTPUT POWER AND PPSD PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

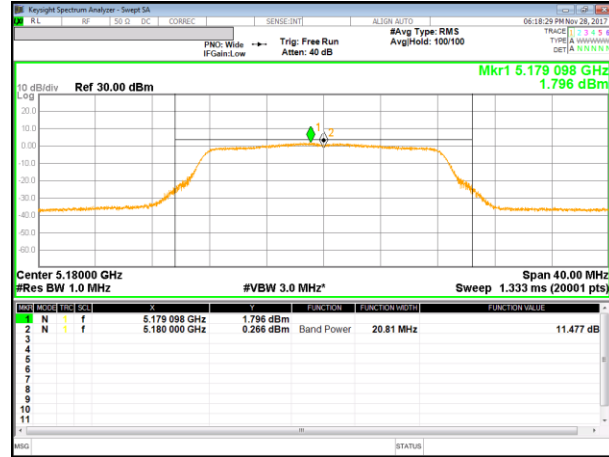

11a Mode Middle Channel

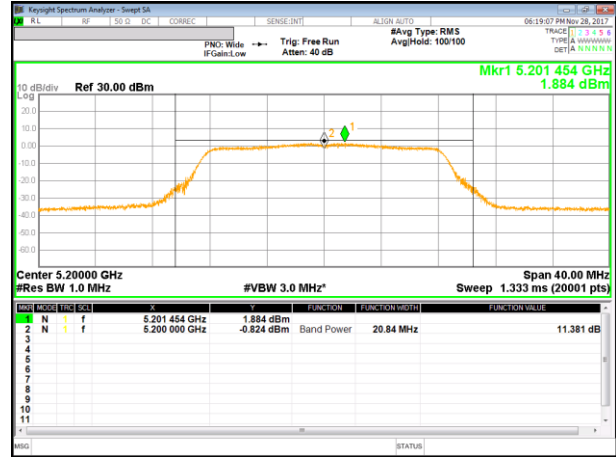


11a Mode High Channel

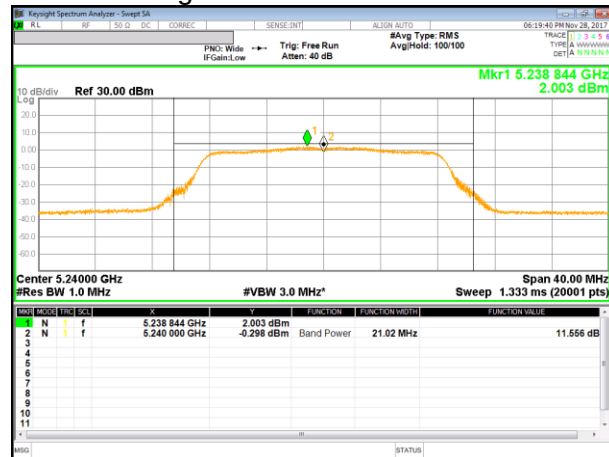


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

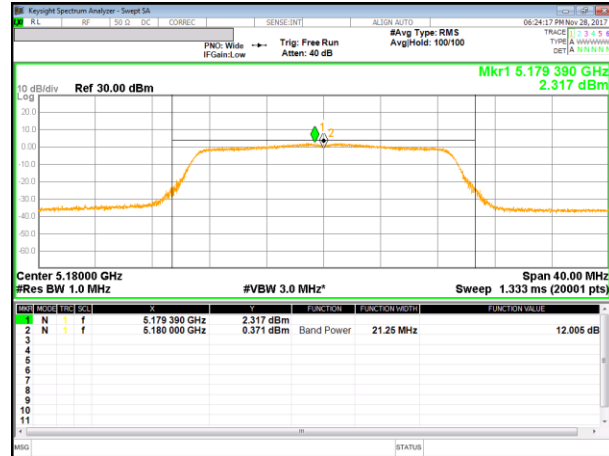


11n HT20 Mode Middle Channel

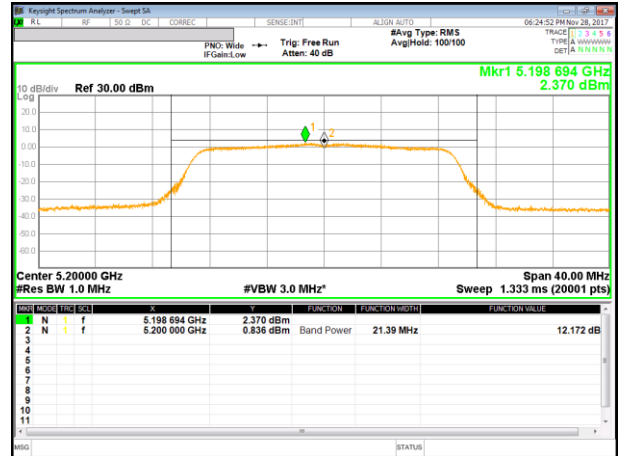


11n HT20 Mode High Channel

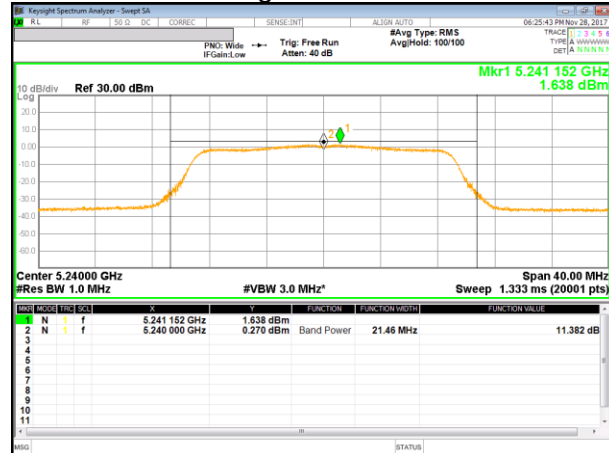

UNII 5.2 GHz IEEE 802.11n HT40 mode

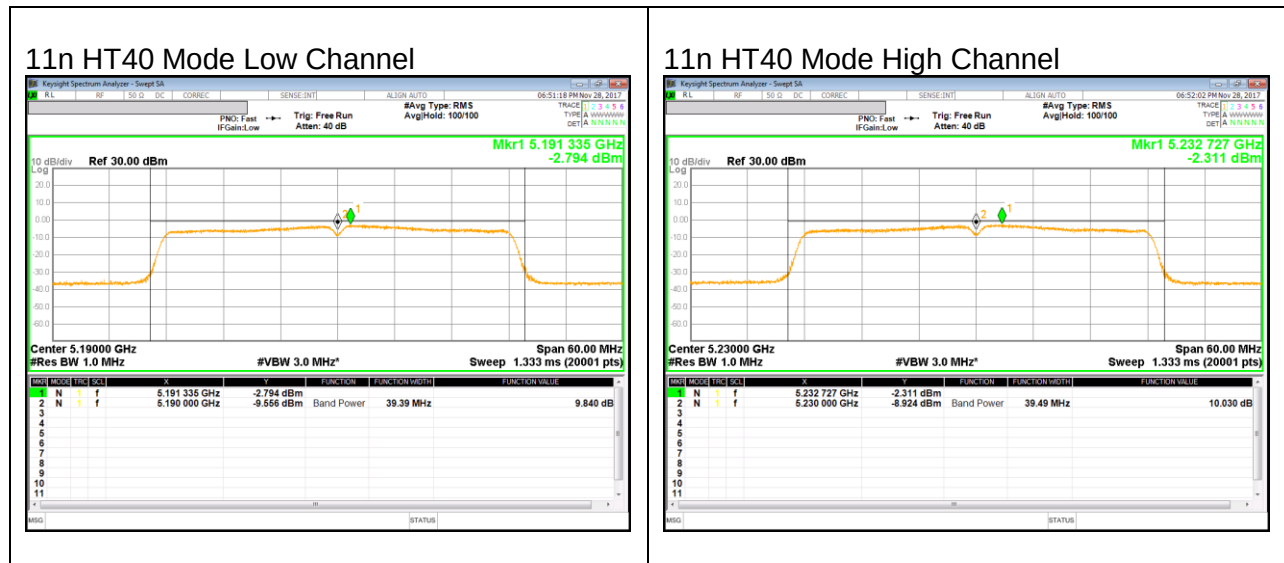


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

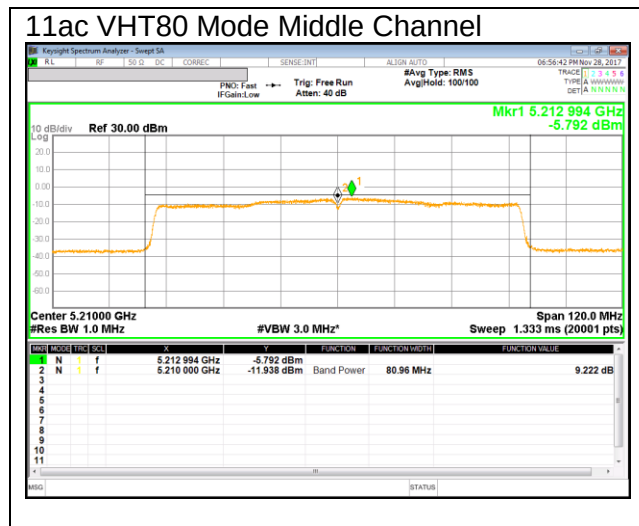


UNII 5.3 GHz IEEE 802.11a mode

11a Mode Low Channel

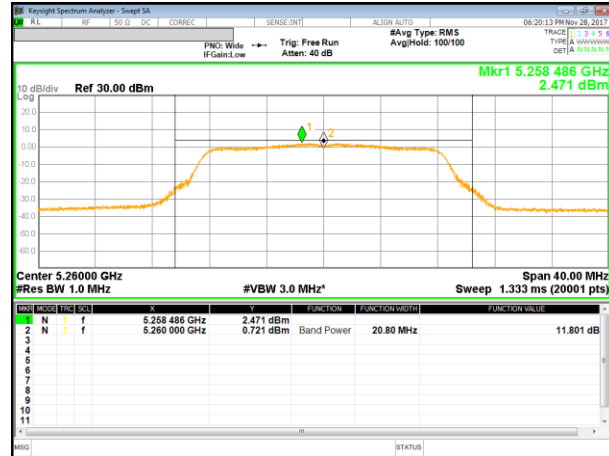

11a Mode Middle Channel

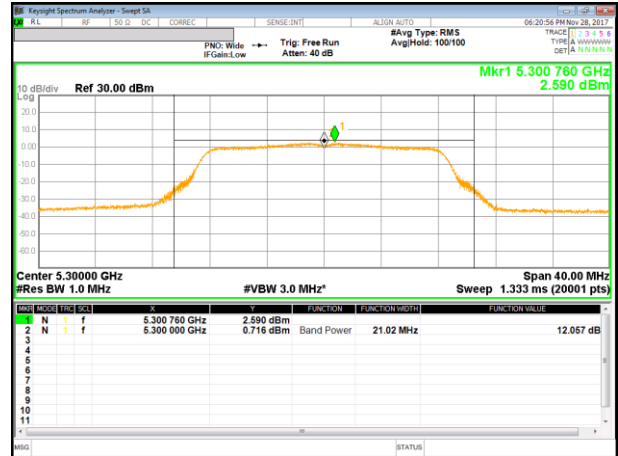

11a Mode High Channel

