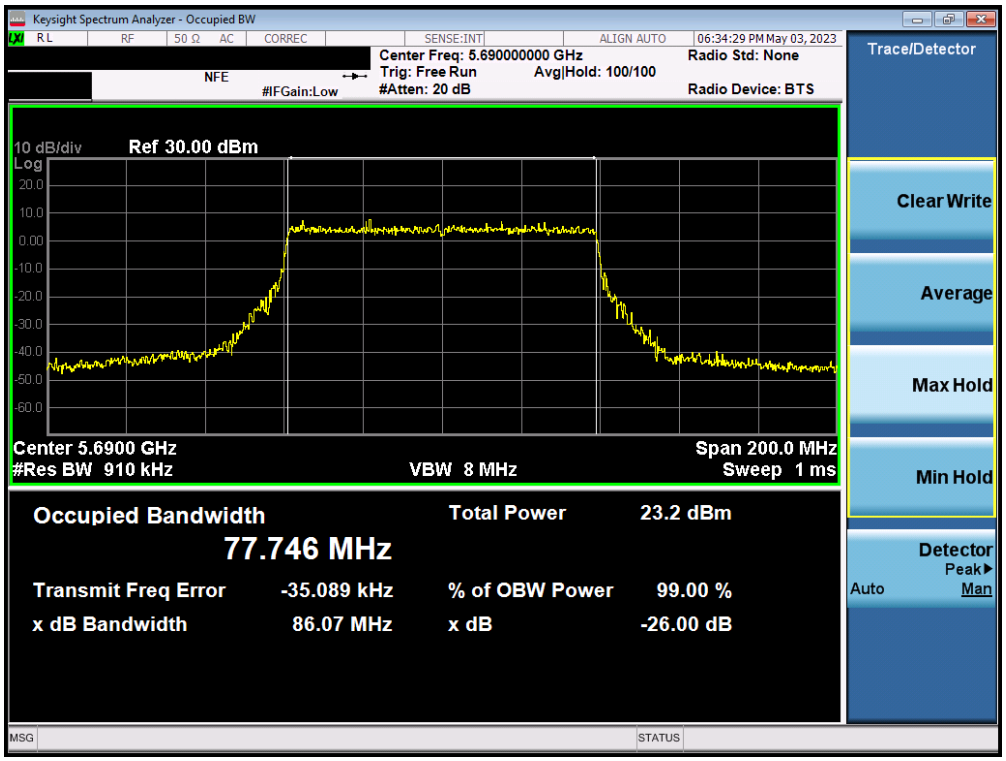

Plot 7-108. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)

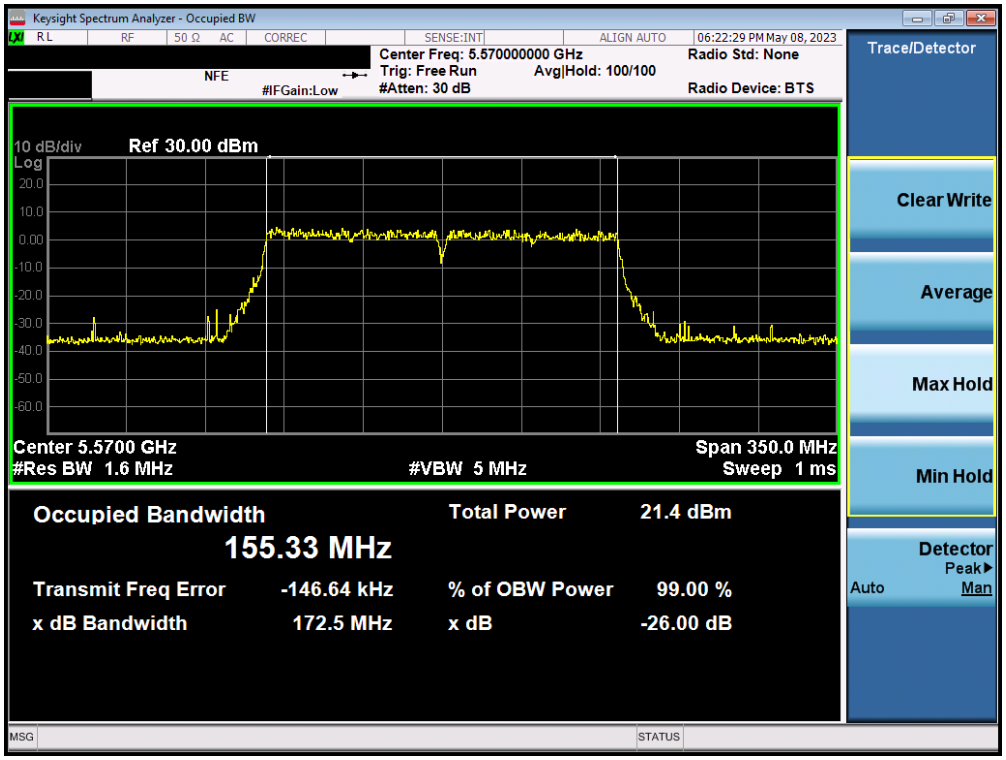

Plot 7-109. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ac (UNII Band 2C) – Ch. 114)

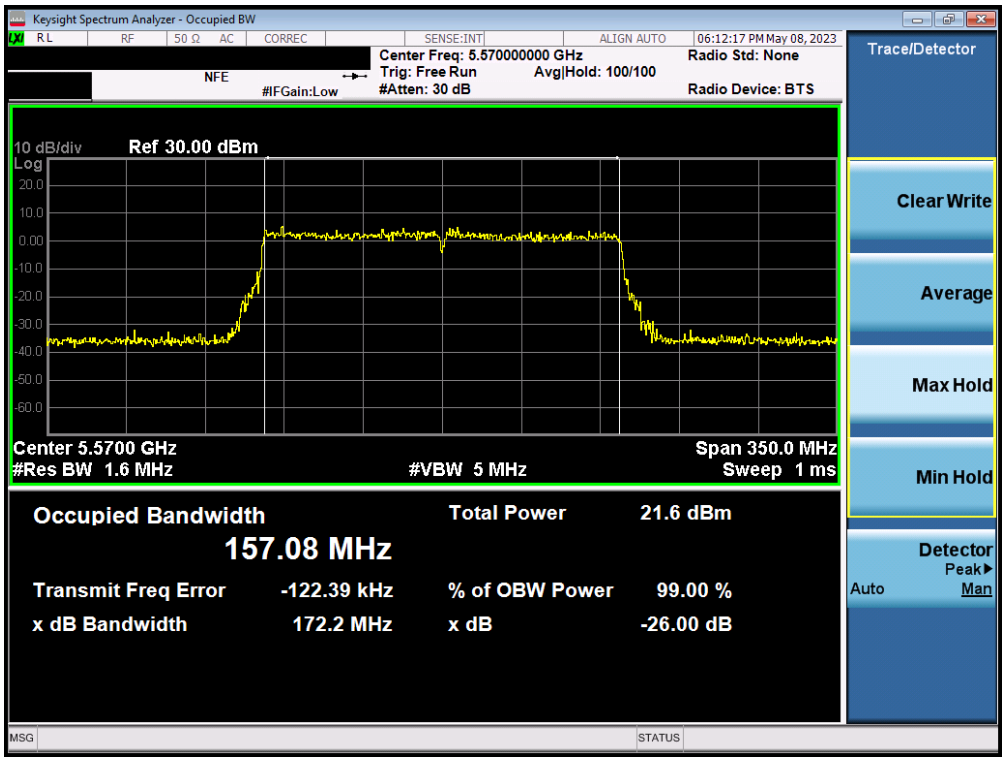

Plot 7-110. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ax (UNII Band 2C) – Ch. 114)

7.3 6dB Bandwidth Measurement – 802.11a/n/ac/ax

§15.407 (e); RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz and 5.850-5.895 bands, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

MIMO Antenna-1 6 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.41
	5785	157	a	6	16.37
	5825	165	a	6	16.39
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.56
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.69
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.58
	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	18.34
	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	18.89
	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	18.80
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.39
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.31
	5755	151	ax (40MHz)	13.5/15 (MCS0)	38.25
	5795	159	ax (40MHz)	13.5/15 (MCS0)	38.29
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	76.43
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	77.96

Table 7-4. Conducted Bandwidth Measurements MIMO ANT1

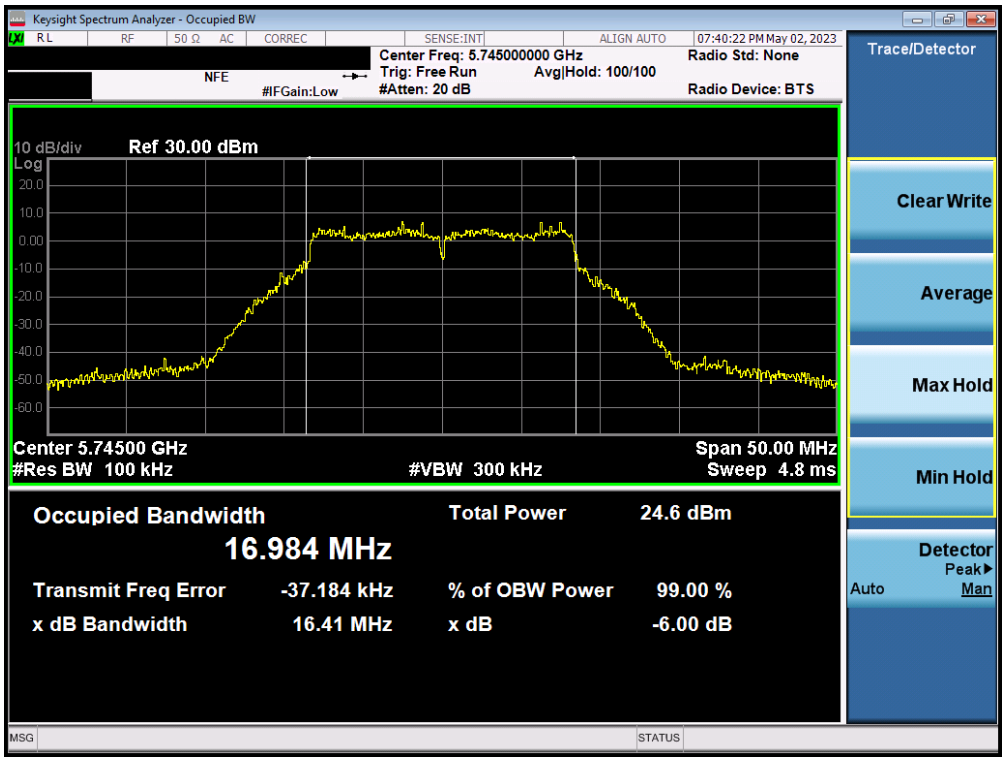

Plot 7-111. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) – Ch. 149)

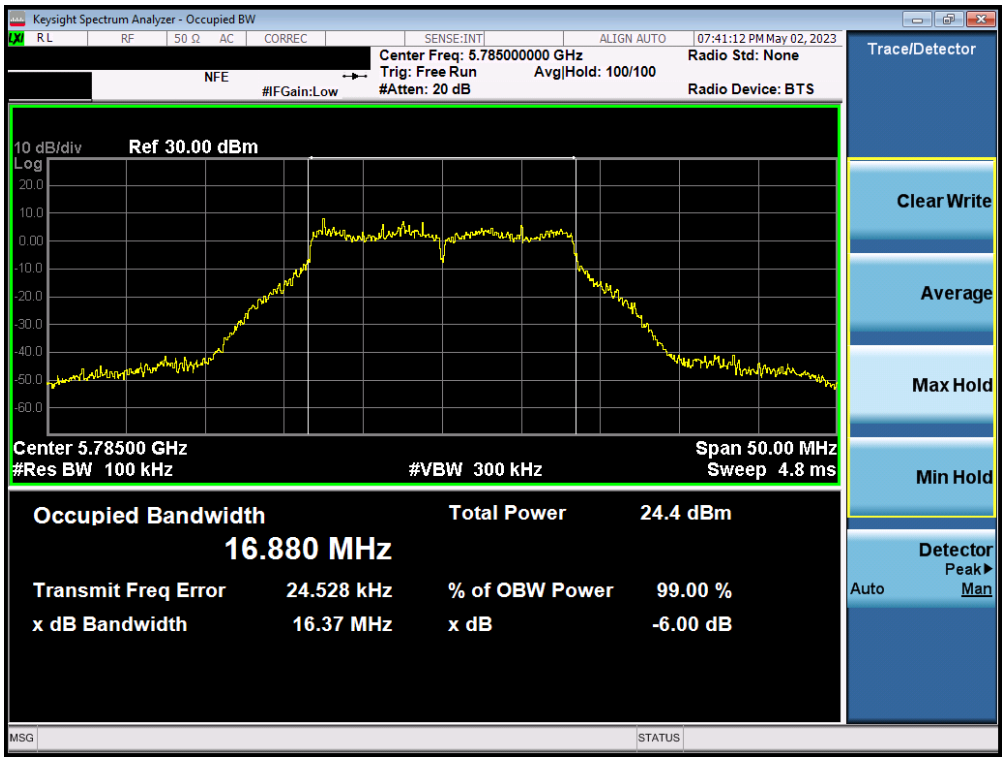

Plot 7-112. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) – Ch. 157)

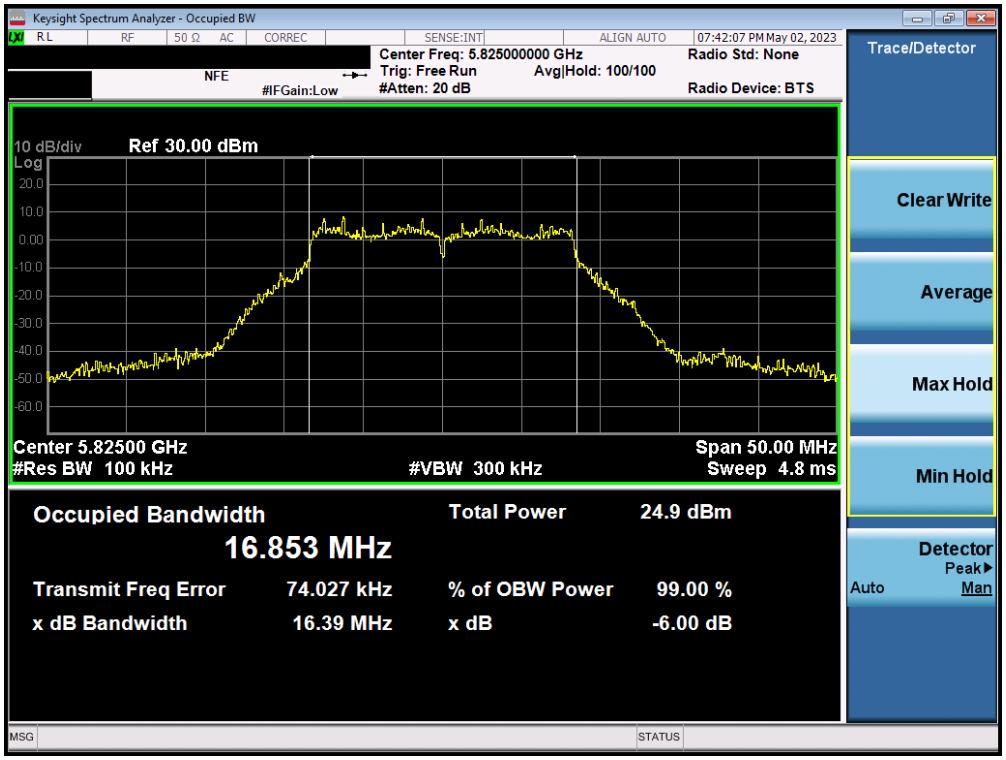

Plot 7-113. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) – Ch. 165)

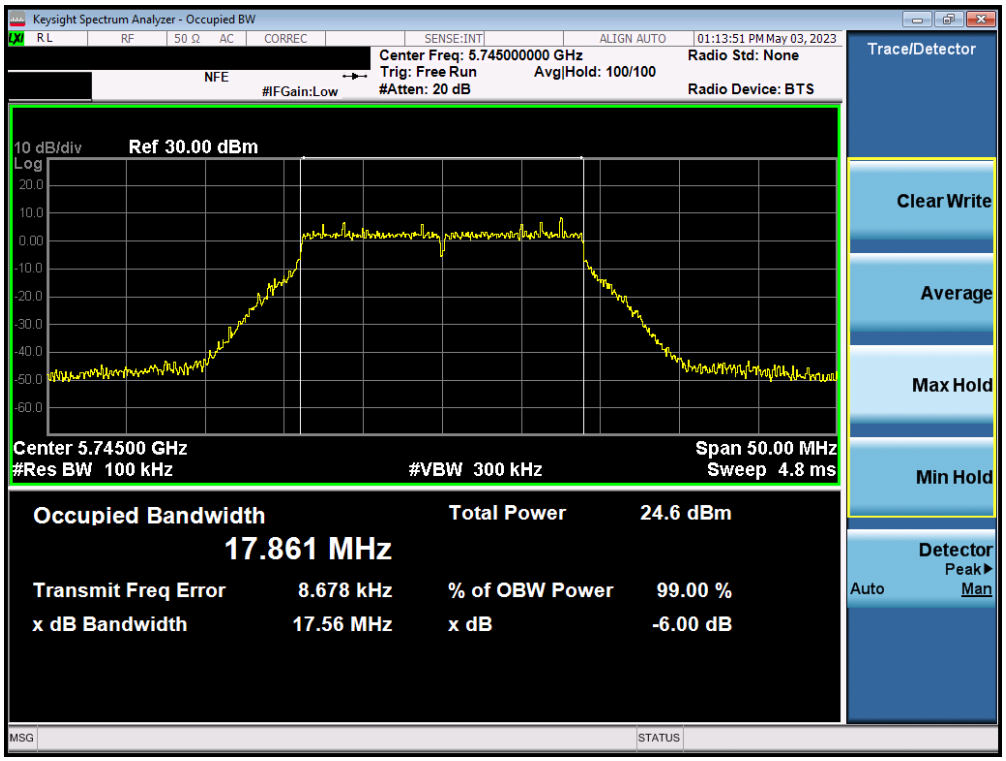

Plot 7-114. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

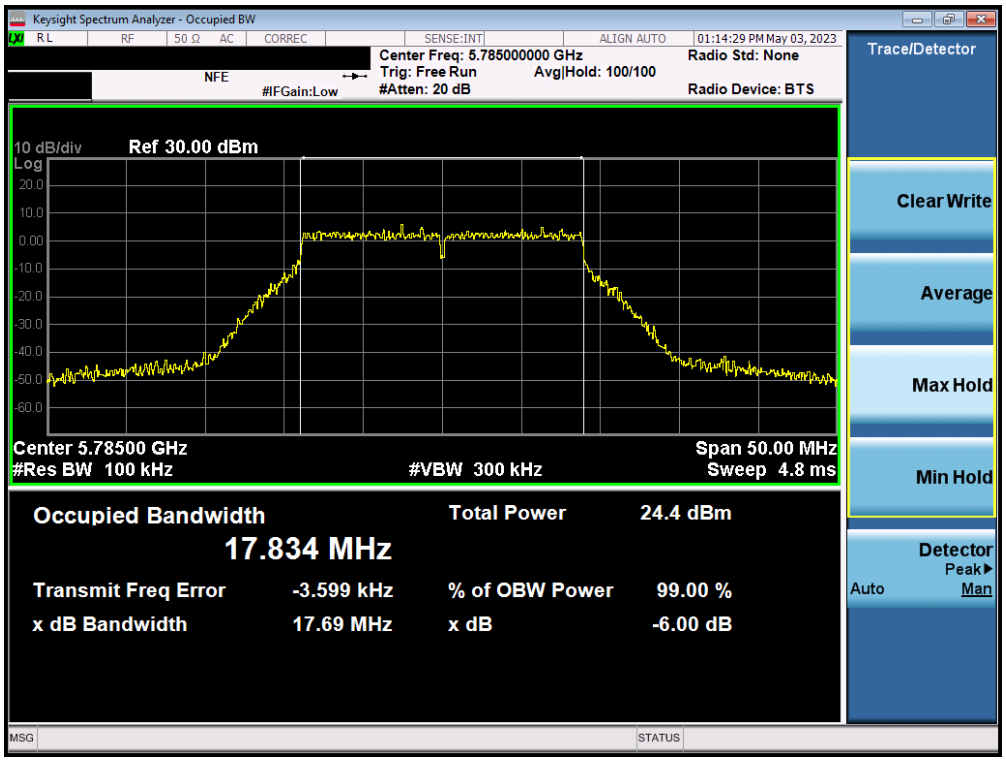

Plot 7-115. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

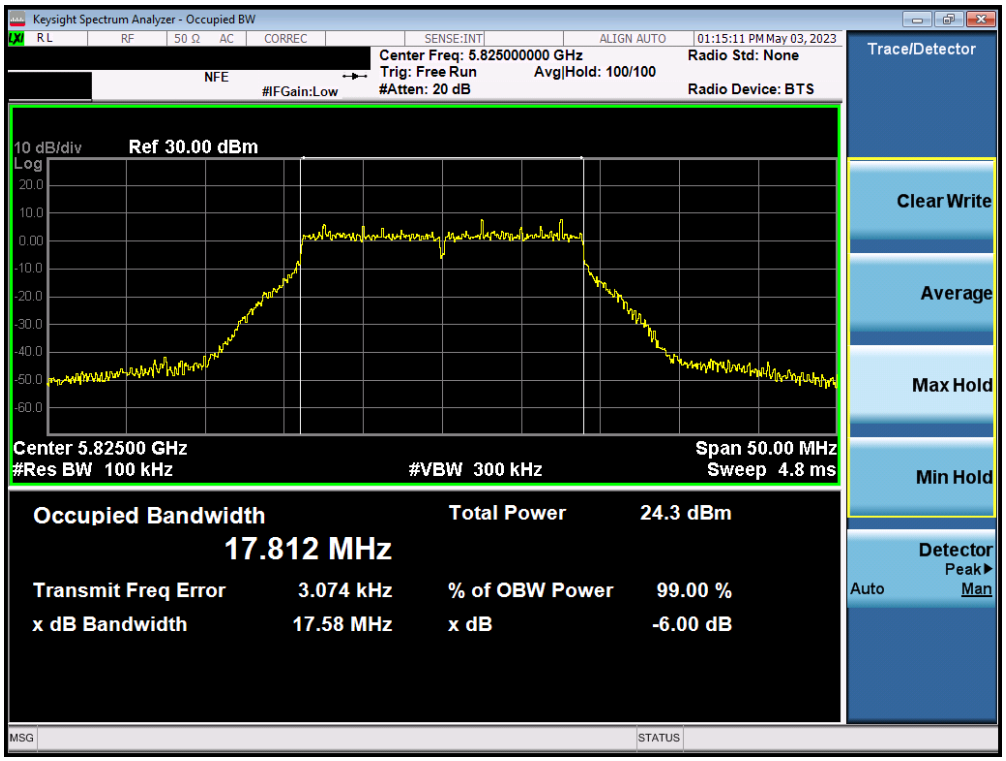

Plot 7-116. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

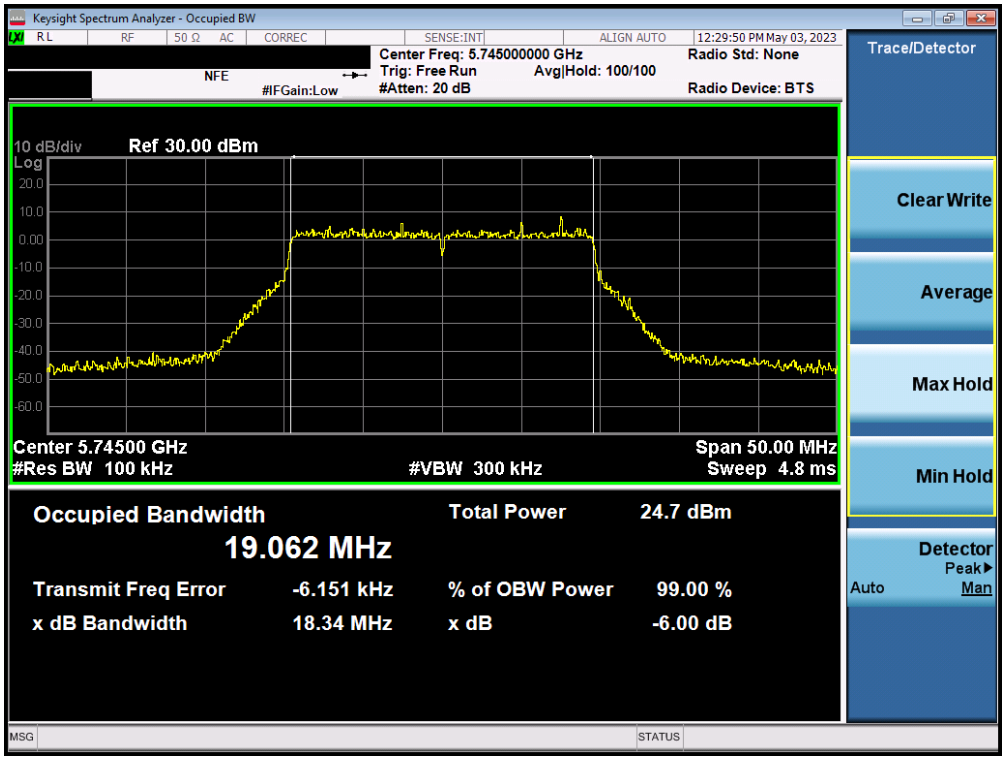

Plot 7-117. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

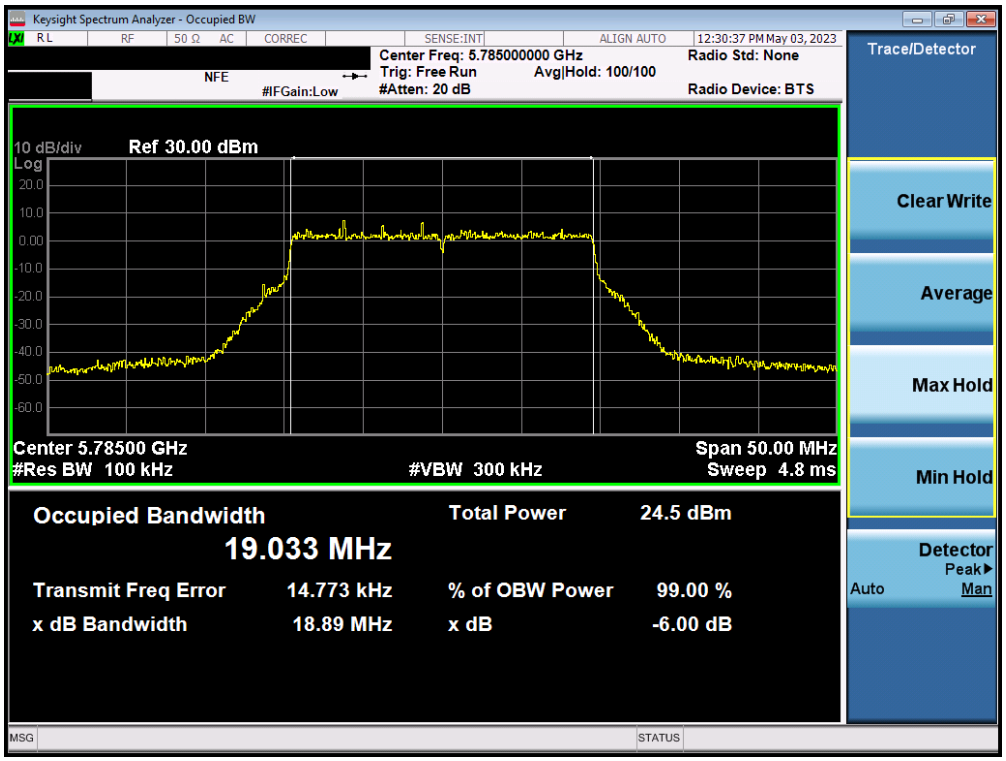

Plot 7-118. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

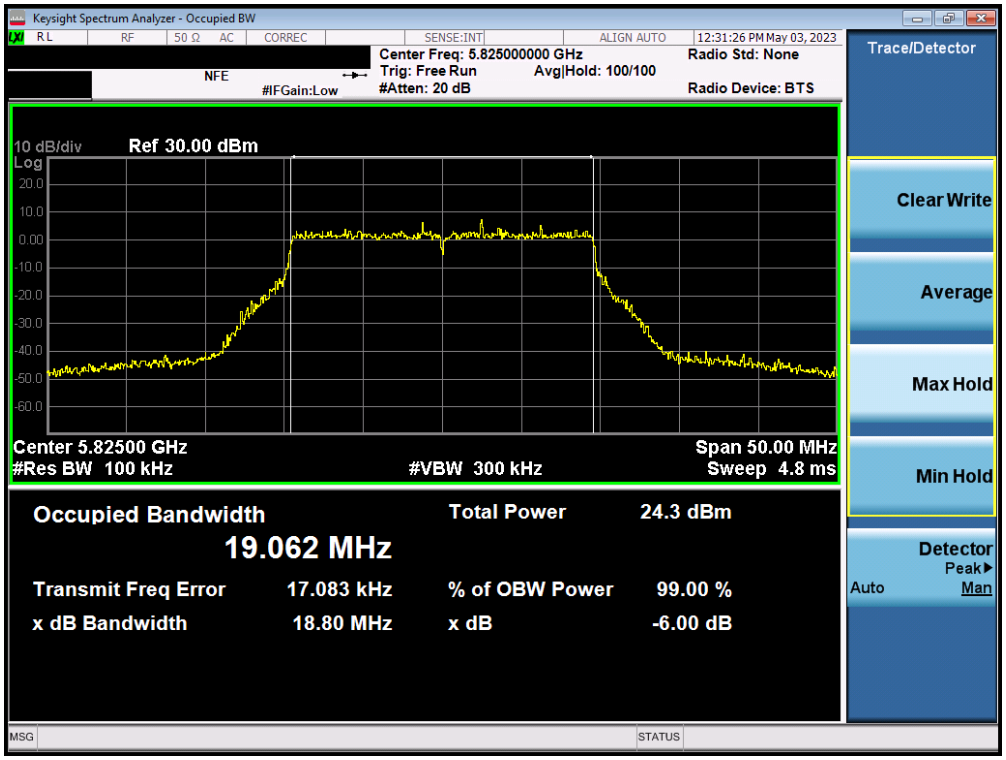

Plot 7-119. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

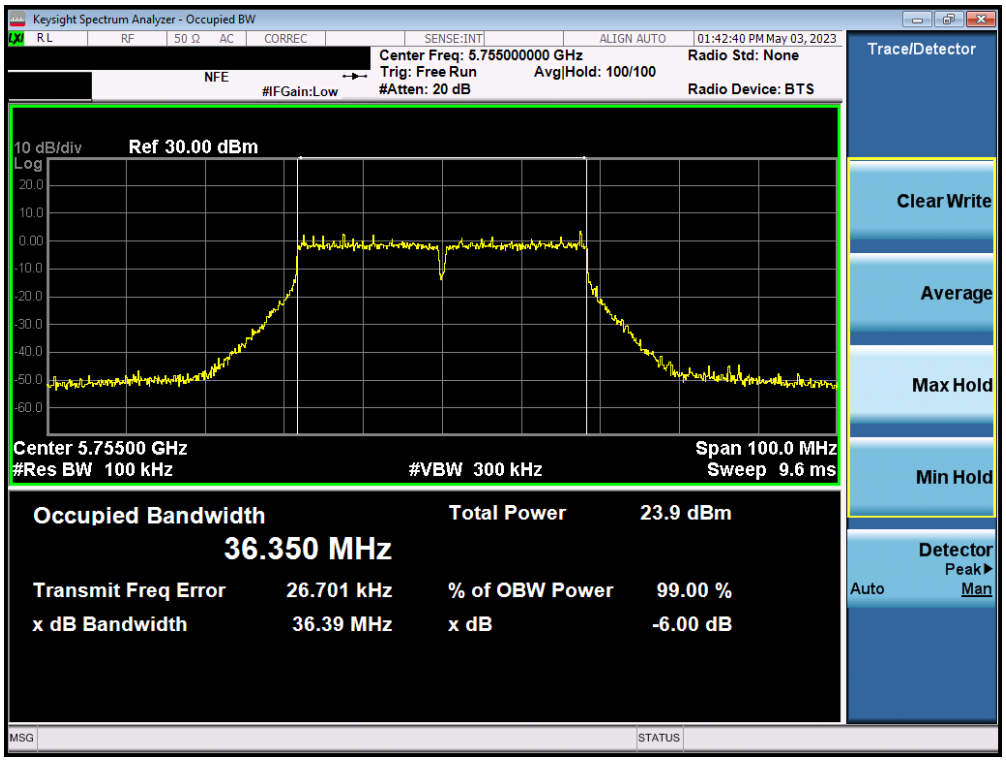

Plot 7-120. 6dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

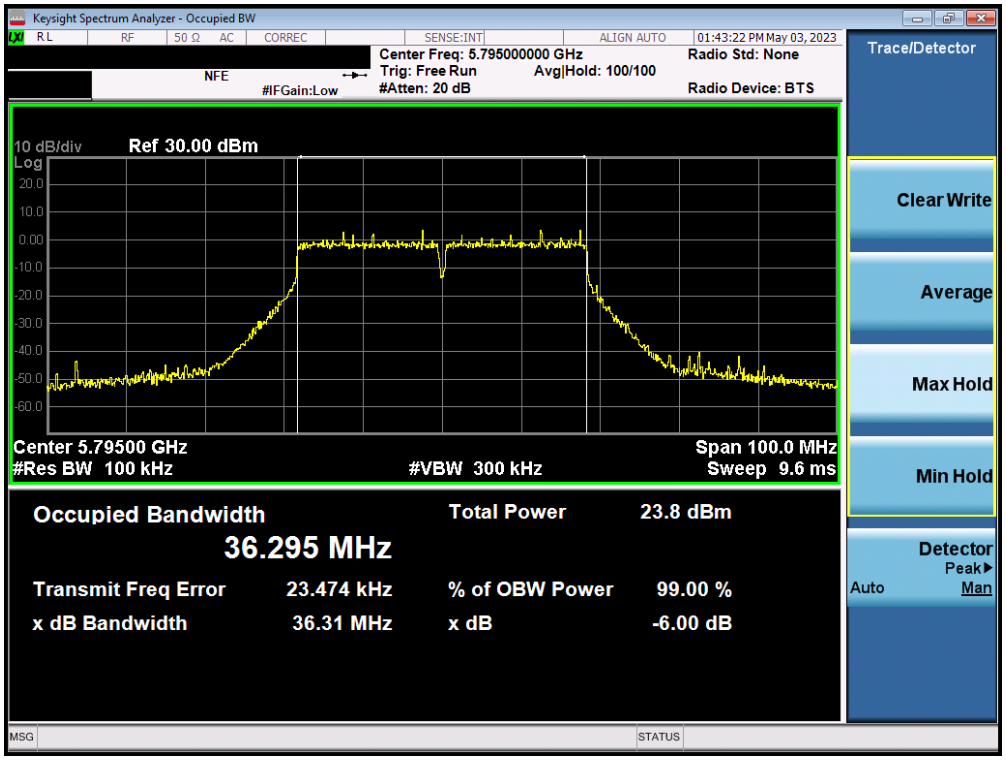

Plot 7-121. 6dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

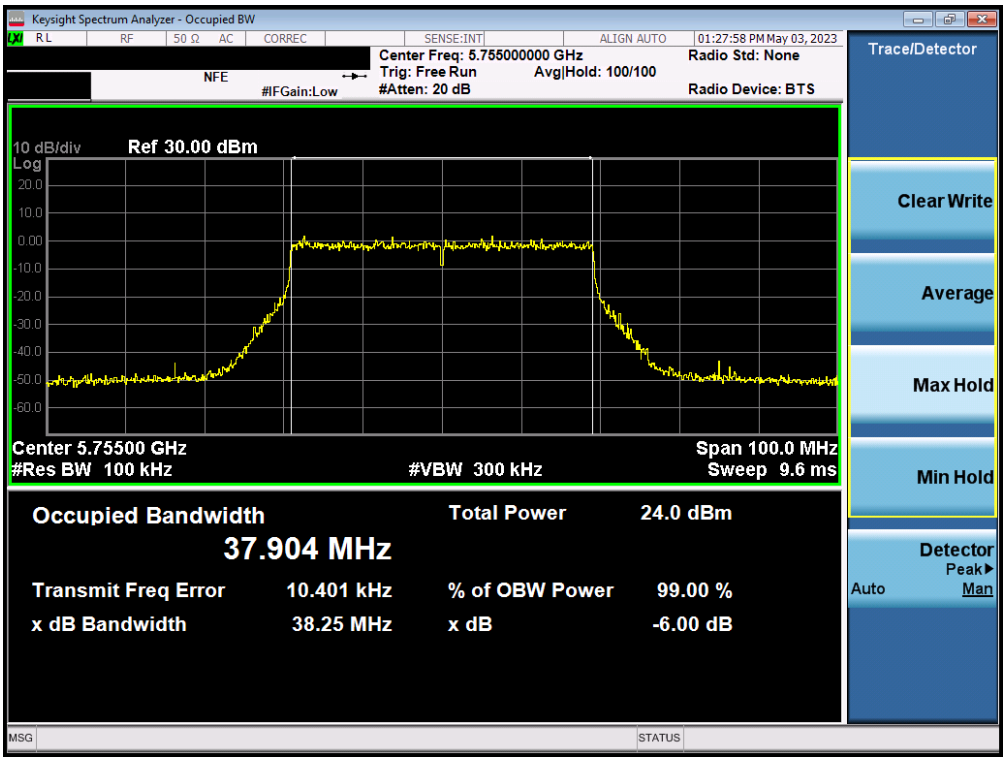

Plot 7-122. 6dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

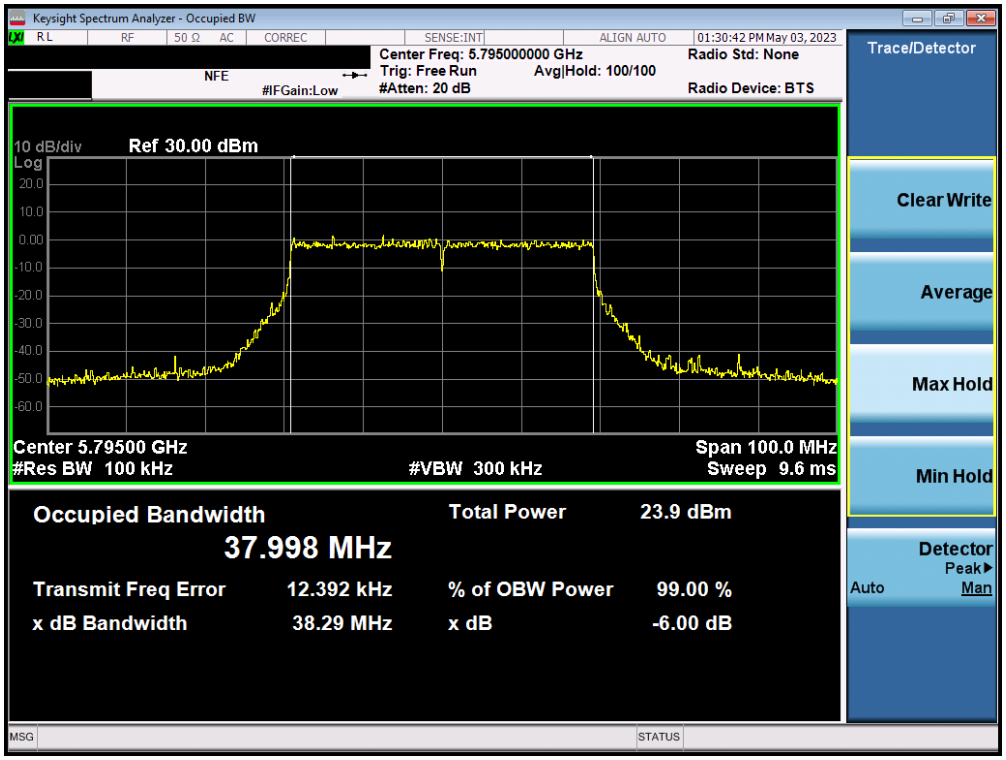

Plot 7-123. 6dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

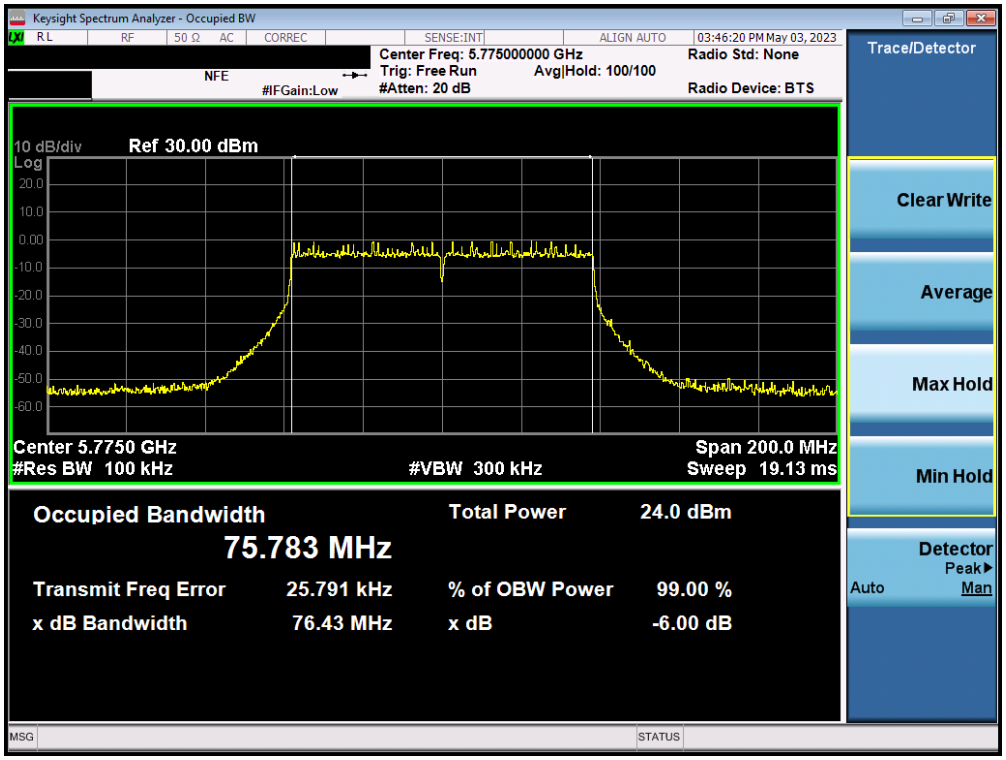

Plot 7-124. 6dB Bandwidth Plot ANT1 (80MHz BW 802.11n (UNII Band 3) – Ch. 155)

Plot 7-125. 6dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	a	6	16.35
Band 4	5865	173	a	6	16.38
	5885	177	a	6	16.36
Band 3/4	5845	169	n (20MHz)	6.5/7.2 (MCS0)	17.58
Band 4	5865	173	n (20MHz)	6.5/7.2 (MCS0)	17.63
	5885	177	n (20MHz)	6.5/7.2 (MCS0)	17.66
Band 3/4	5845	169	ax (20MHz)	6.5/7.2 (MCS0)	18.98
Band 4	5865	173	ax (20MHz)	6.5/7.2 (MCS0)	19.02
	5885	177	ax (20MHz)	6.5/7.2 (MCS0)	18.82
Band 3/4	5835	167	ac (40MHz)	13.5/15 (MCS0)	36.40
Band 4	5875	175	ac (40MHz)	13.5/15 (MCS0)	36.39
Band 3/4	5835	167	ax (40MHz)	13.5/15 (MCS0)	38.18
Band 4	5875	175	ax (40MHz)	13.5/15 (MCS0)	38.06
Band 3/4	5855	171	ac (80MHz)	29.3/32.5 (MCS0)	75.76
	5855	171	ax (80MHz)	29.3/32.5 (MCS0)	78.08
	5815	163	ac (160MHz)	58.5/65 (MCS0)	156.10
	5815	163	ax (160MHz)	58.5/65 (MCS0)	157.90

Table 7-5. Conducted Bandwidth Measurements Band 4 MIMO ANT1

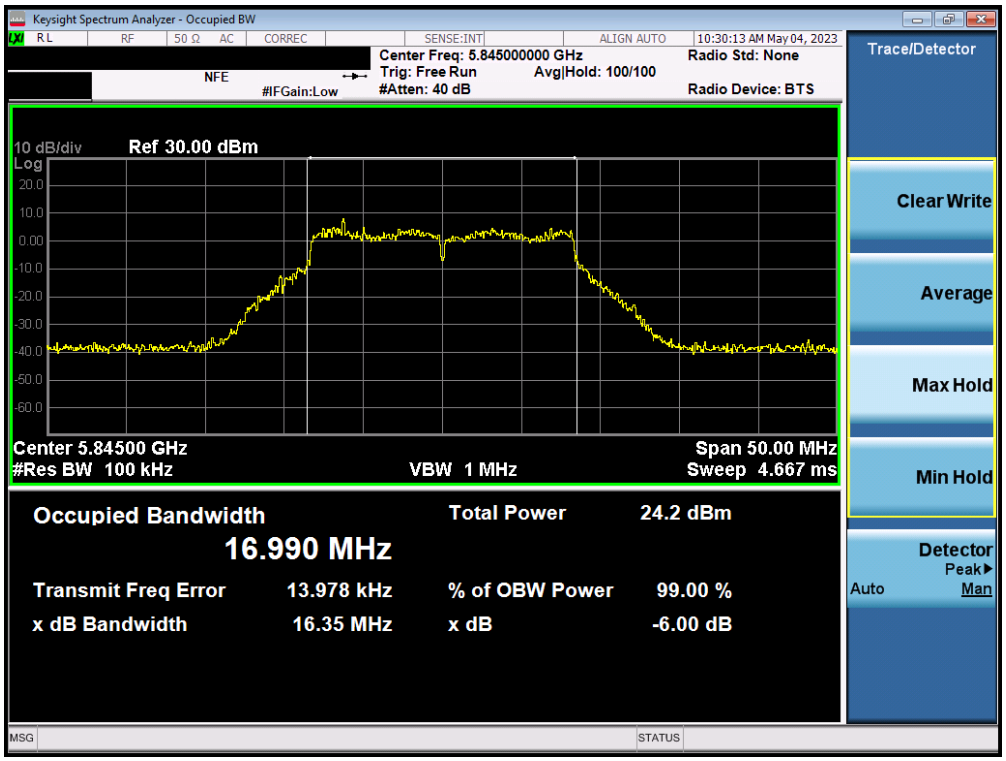

Plot 7-126. 6dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 3/4) – Ch. 169)

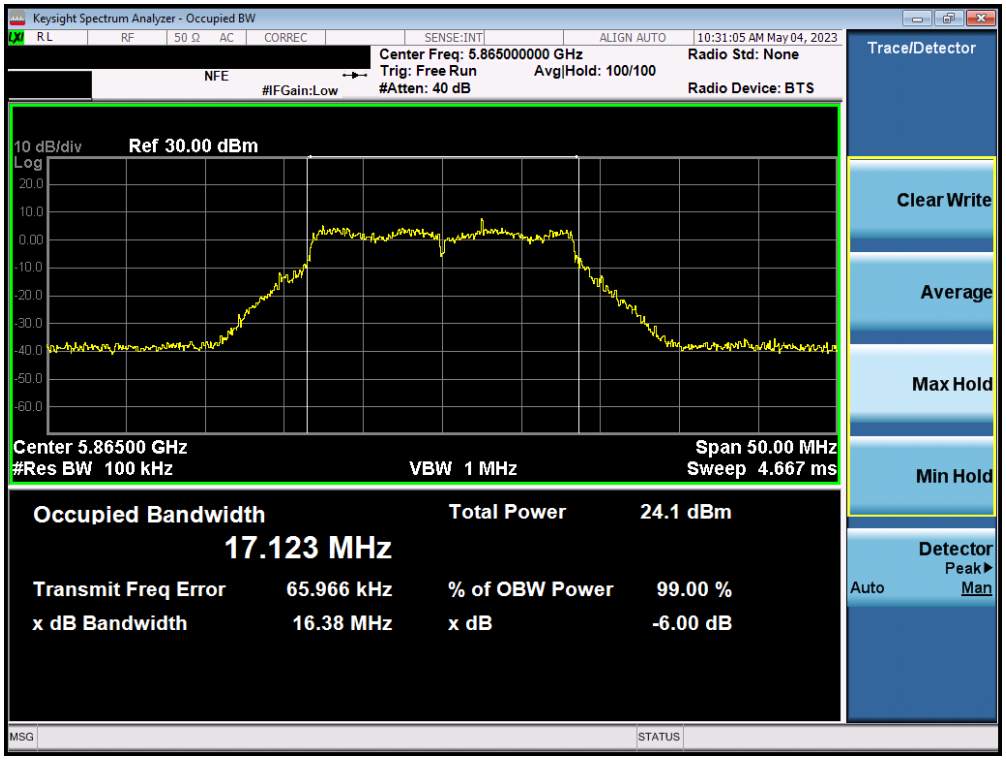

Plot 7-127. 6dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 4) – Ch. 173)

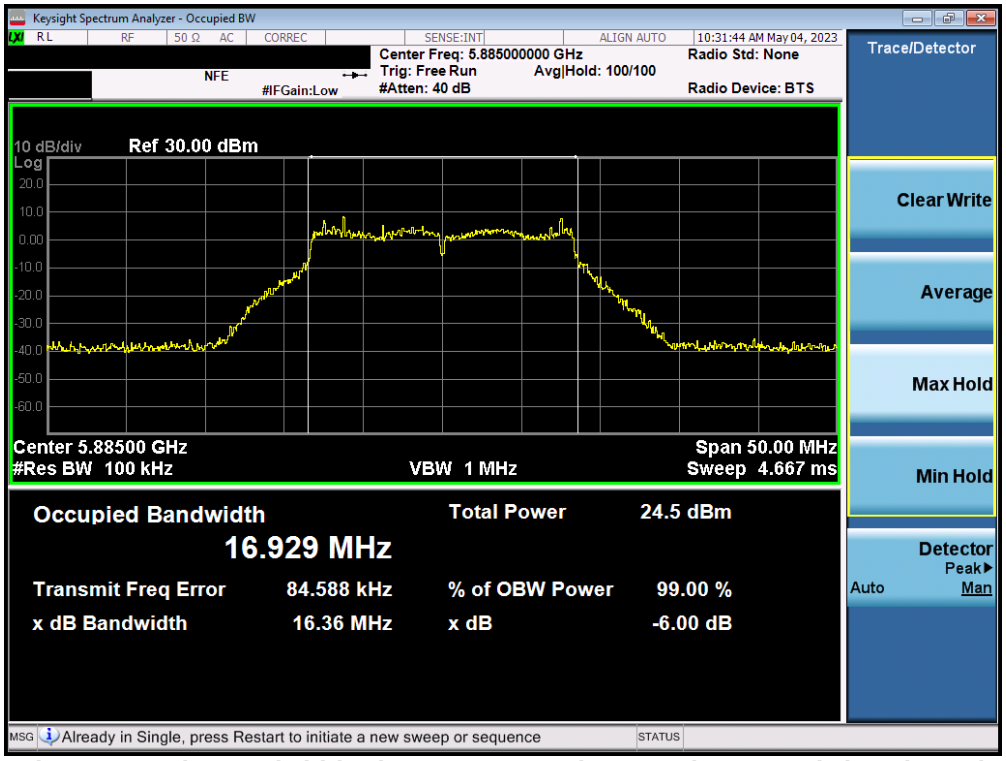

Plot 7-128. 6dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 4) – Ch. 177)

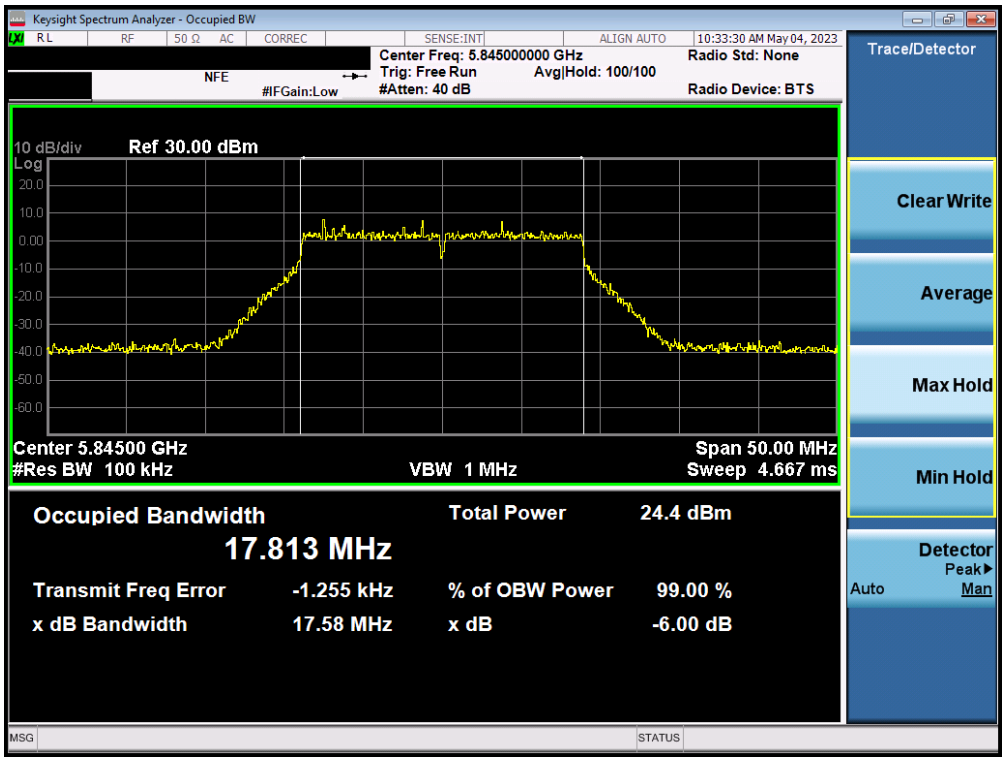

Plot 7-129. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 3/4) – Ch. 169)

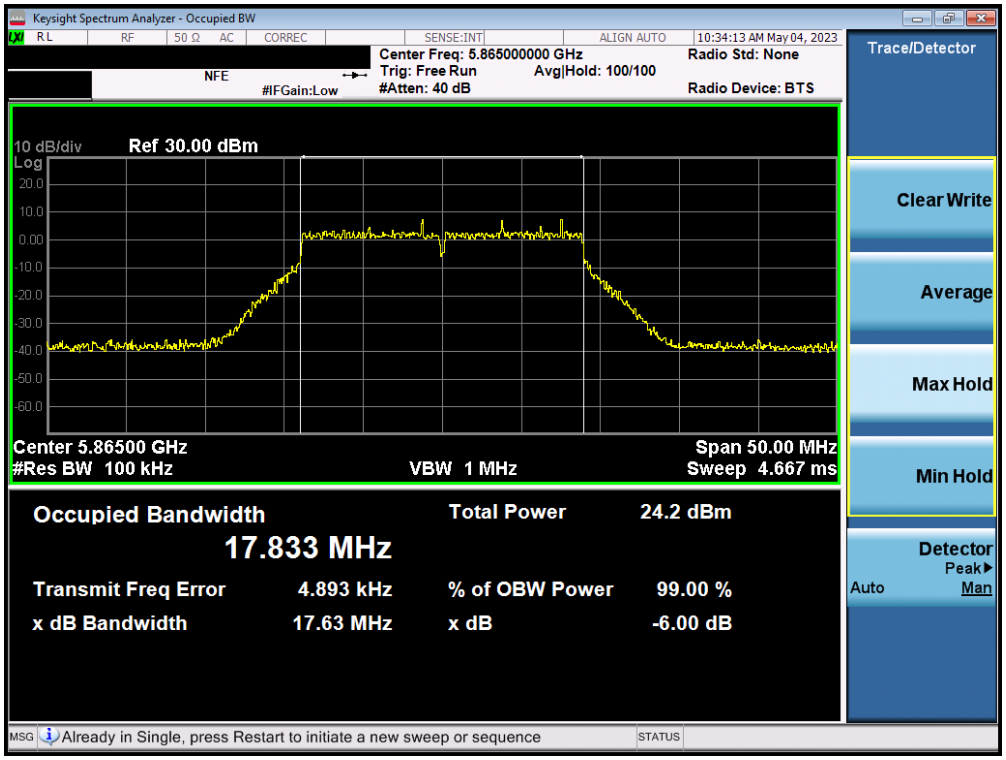

Plot 7-130. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 4) – Ch. 173)

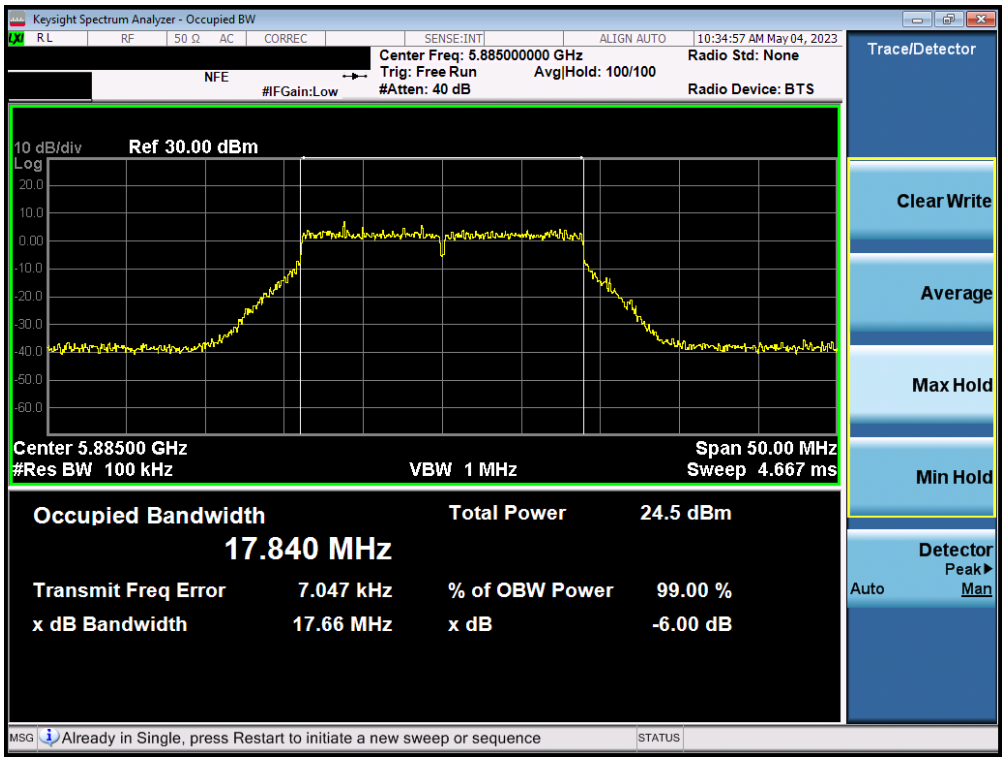

Plot 7-131. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 4) – Ch. 177)

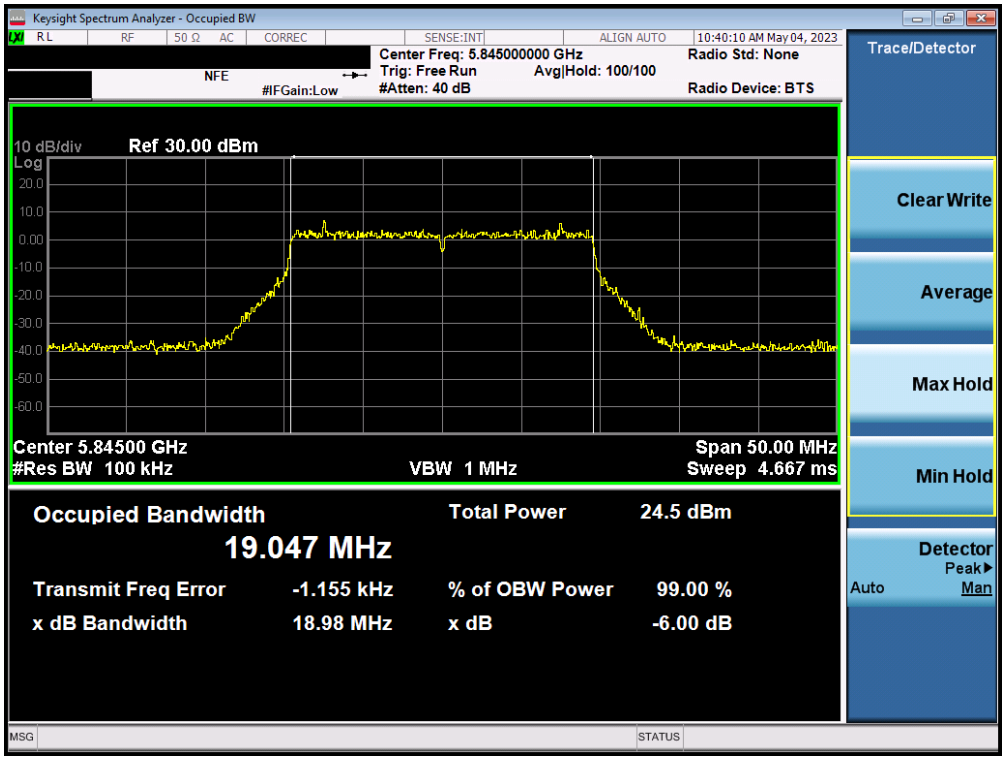

Plot 7-132. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 3/4) – Ch. 169)

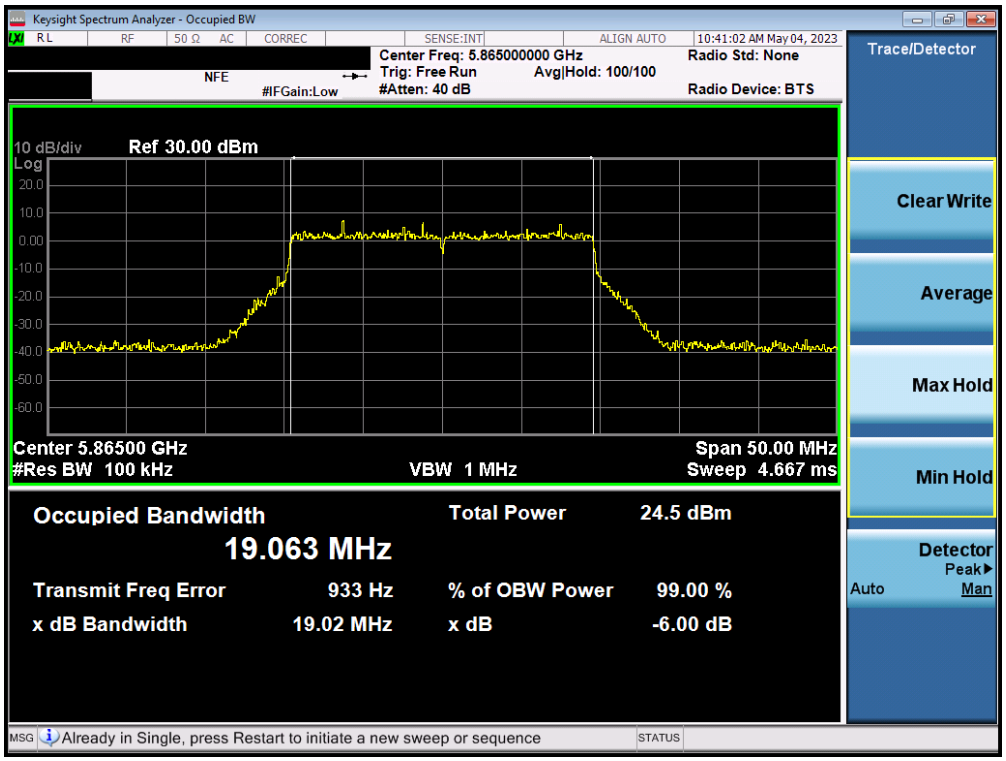

Plot 7-133. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 4) – Ch. 173)

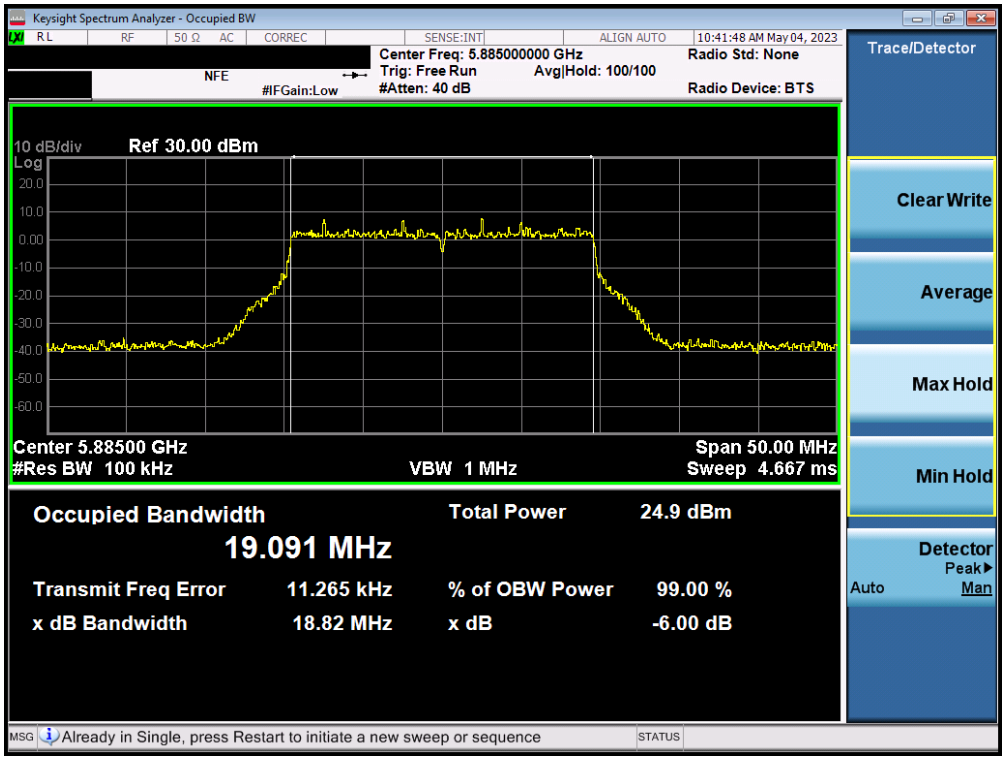

Plot 7-134. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 4) – Ch. 177)

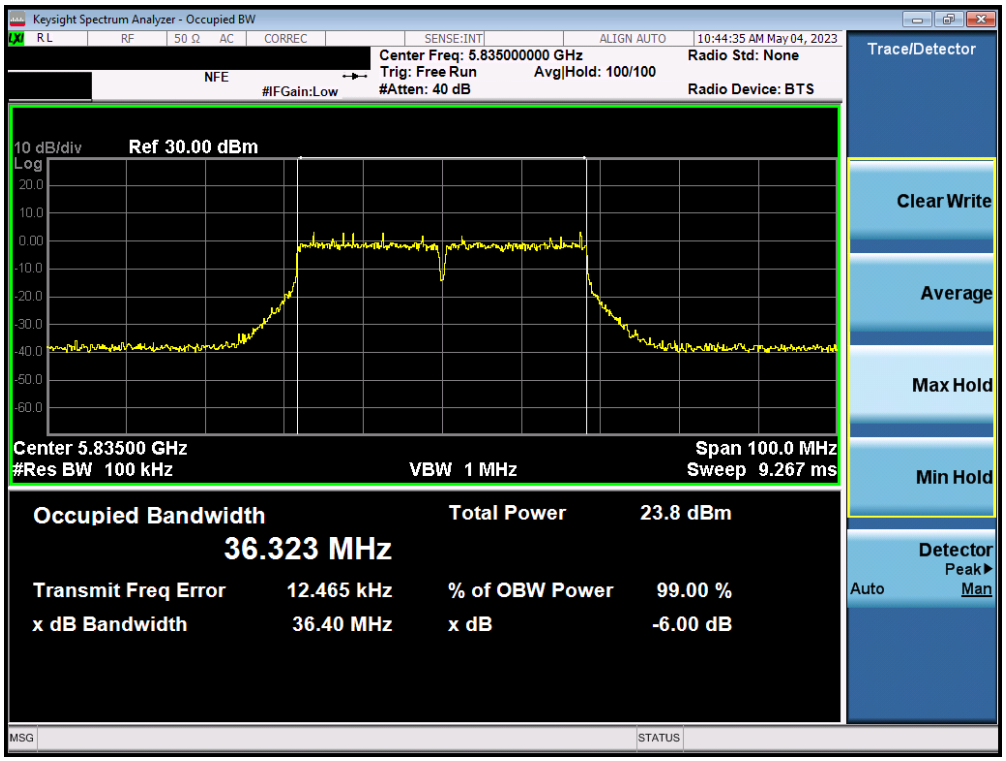

Plot 7-135. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ac (UNII Band 3/4) – Ch. 167)

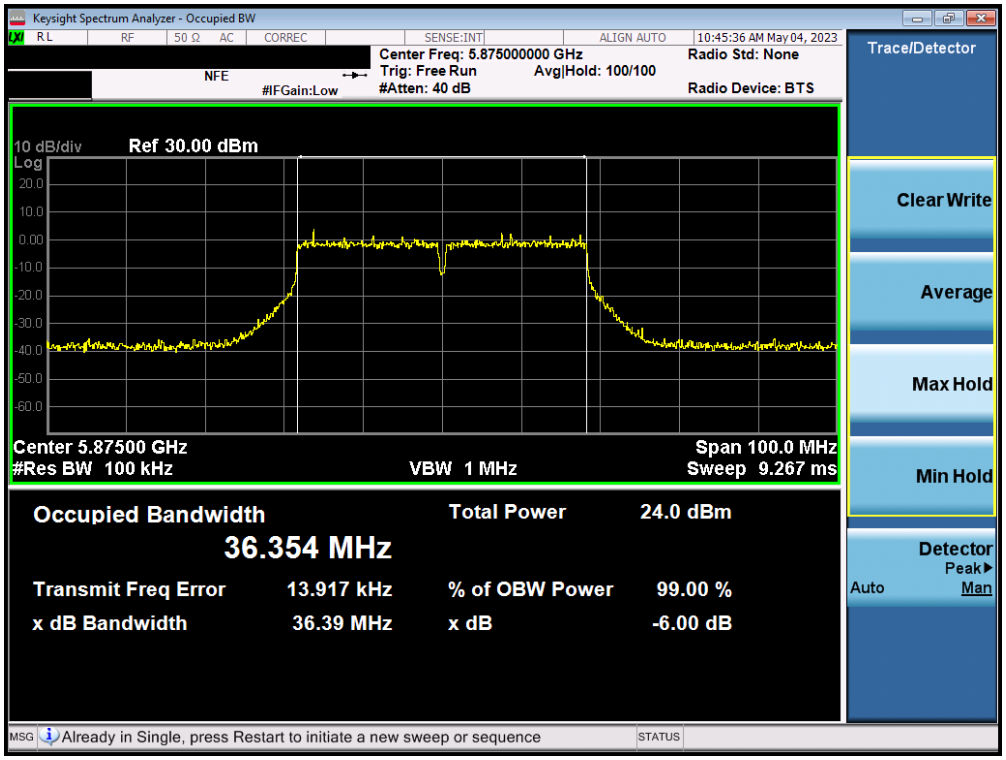

Plot 7-136. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ac (UNII Band 4) – Ch. 175)

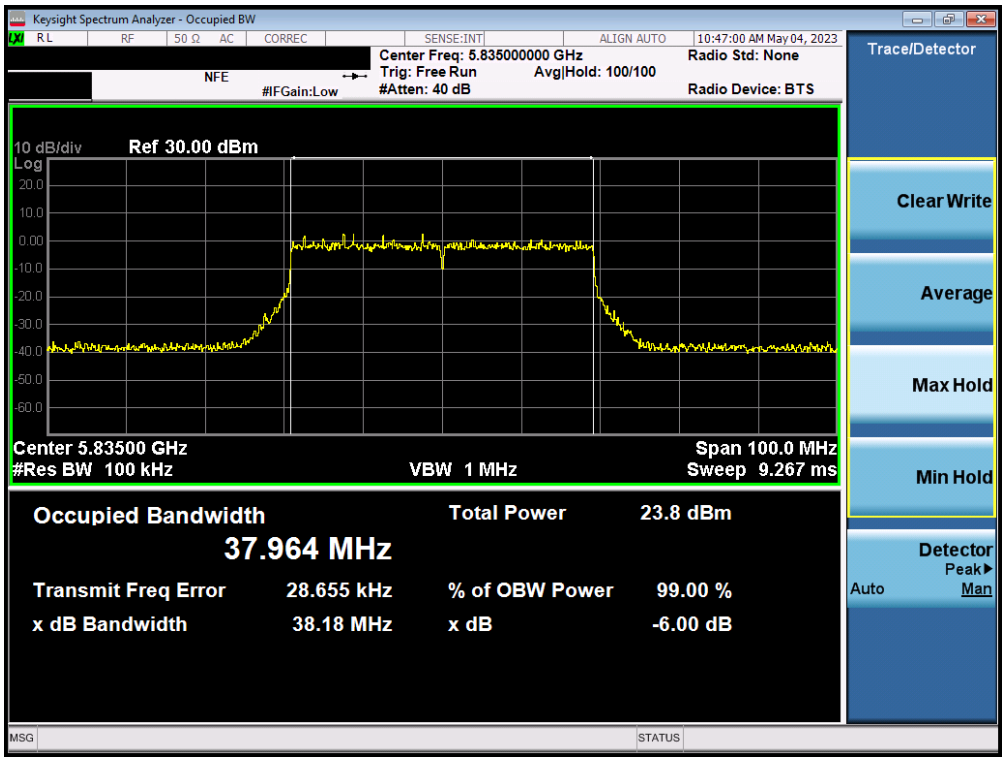

Plot 7-137. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 3/4) – Ch. 167)

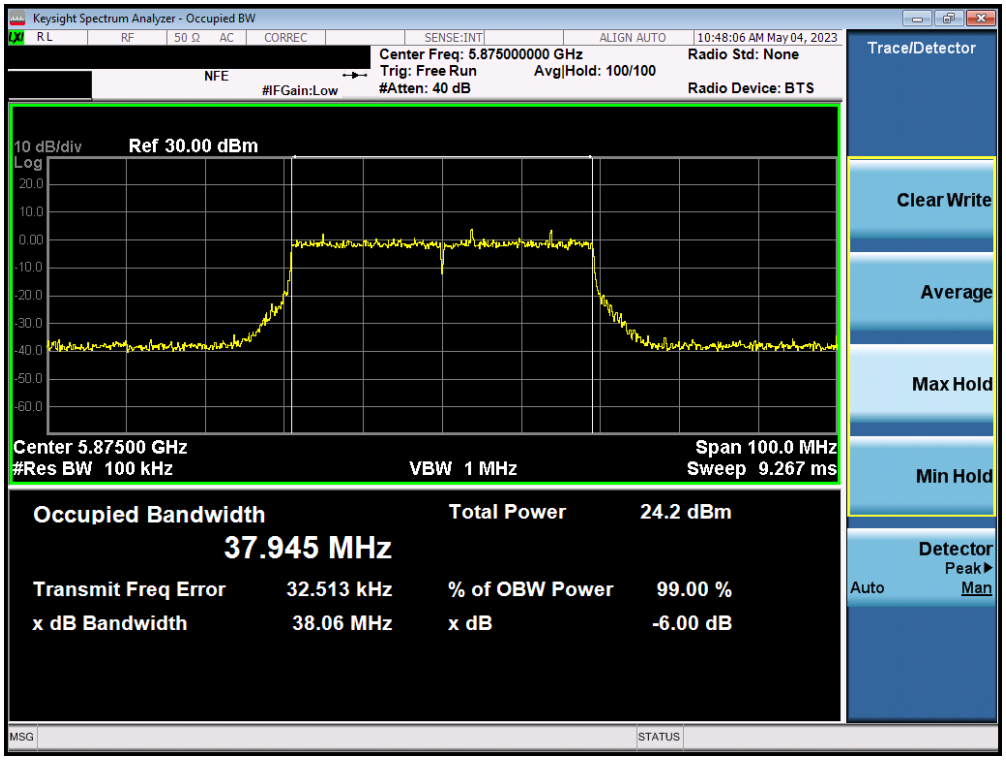

Plot 7-138. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 4) – Ch. 175)

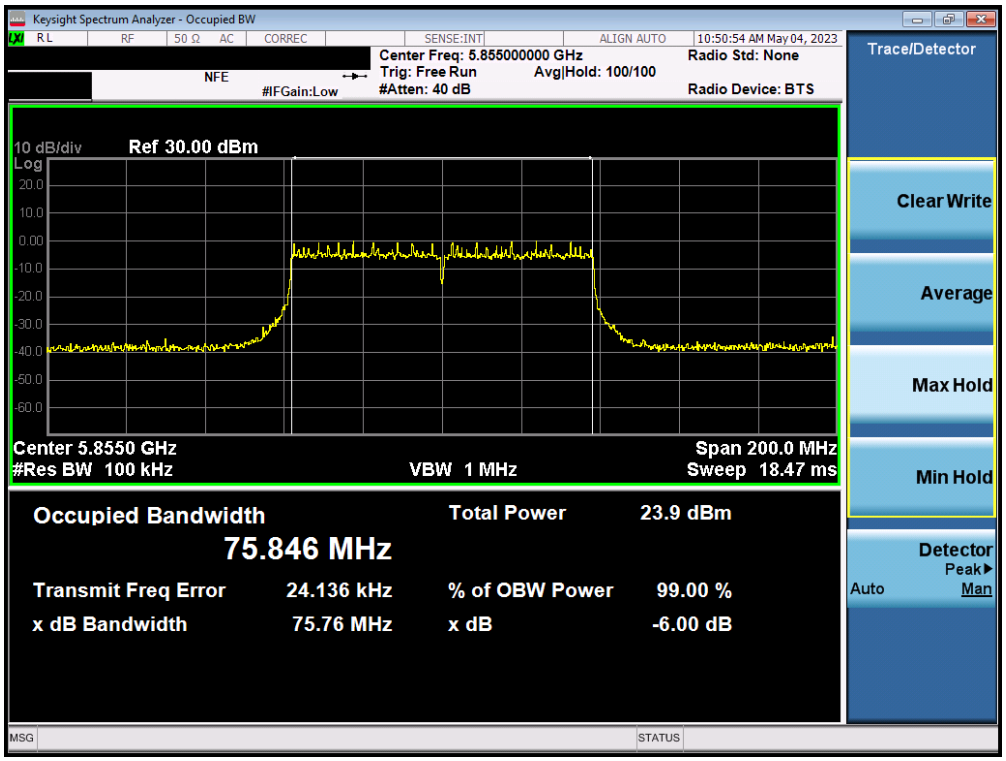

Plot 7-139. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ac (UNII Band 3/4) – Ch. 171)

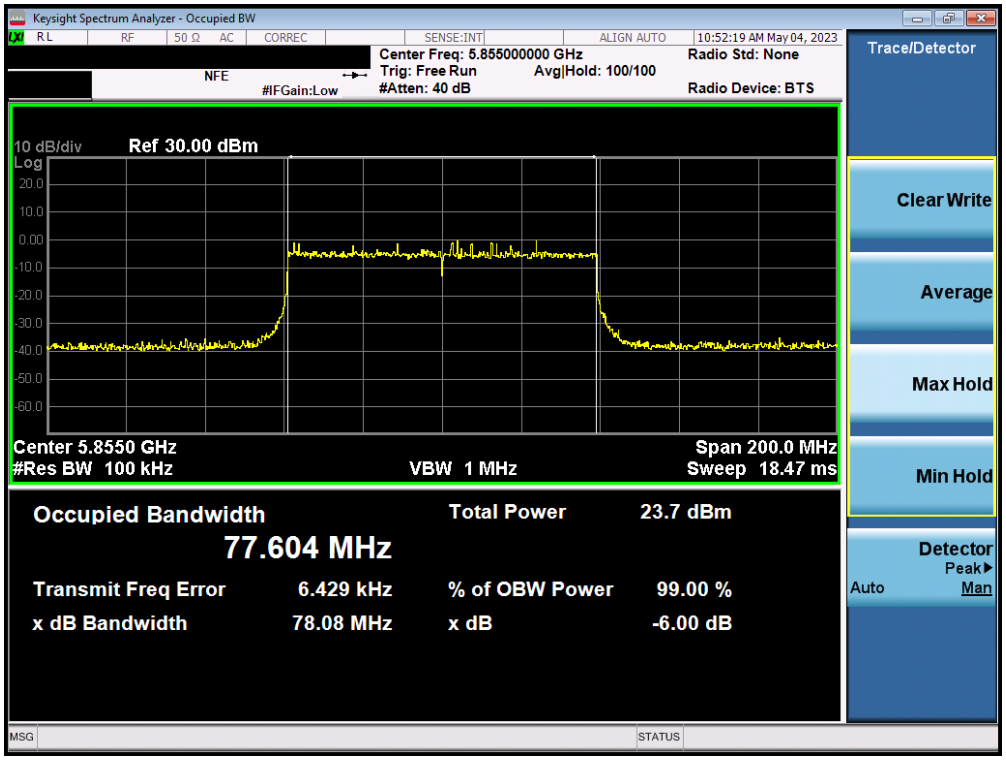

Plot 7-140. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax (UNII Band 3/4) – Ch. 171)

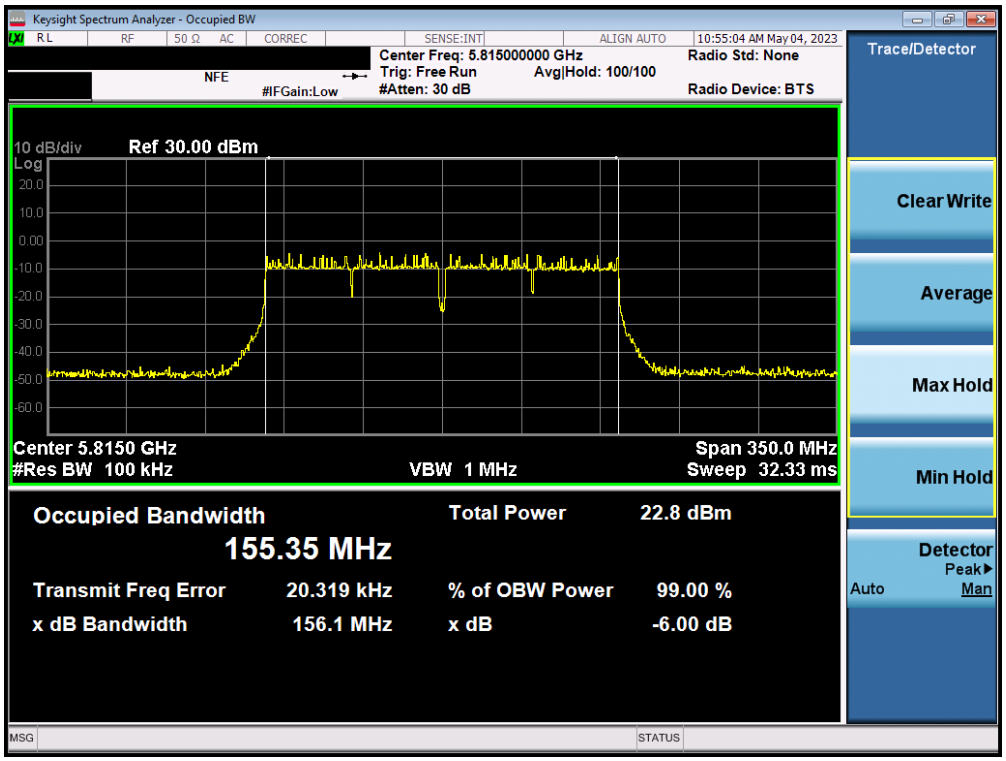

Plot 7-141. 6dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ac (UNII Band 3/4) – Ch. 163)

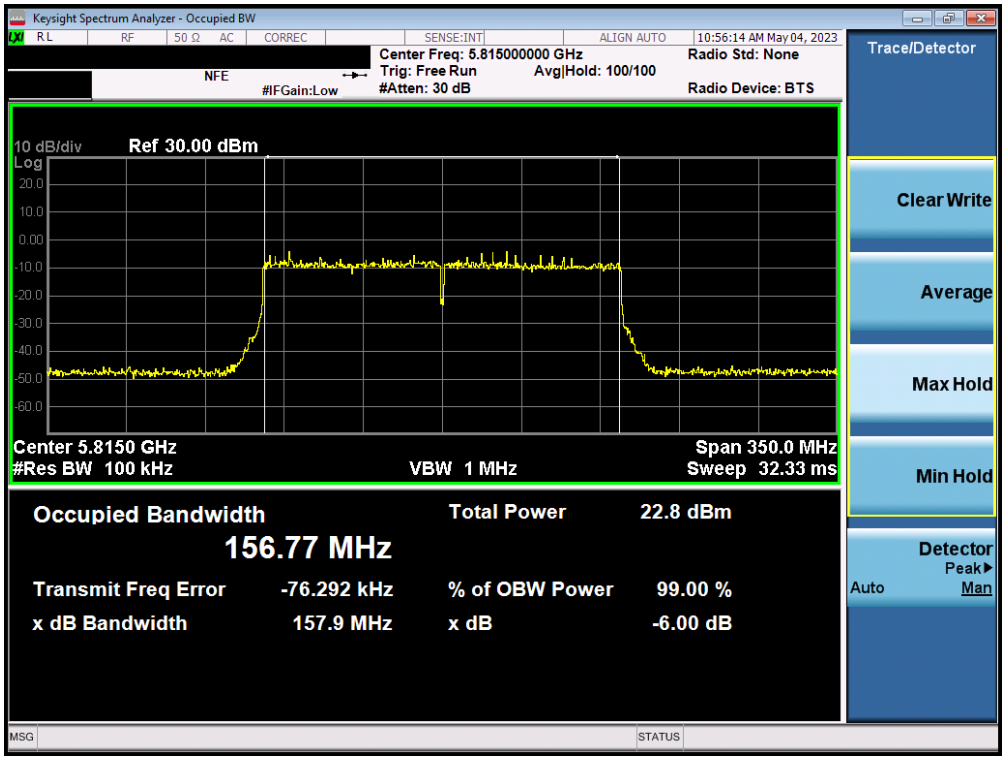

Plot 7-142. 6dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax (UNII Band 3/4) – Ch. 163)

MIMO Antenna-2 6dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.37
	5785	157	a	6	16.37
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.65
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.69
	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	19.05
	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	18.99
	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	19.04
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.52
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.43
	5755	151	ax (40MHz)	13.5/15 (MCS0)	38.23
	5795	159	ax (40MHz)	13.5/15 (MCS0)	38.03
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	76.55
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	77.99

Table 7-6. Conducted Bandwidth Measurements MIMO ANT2

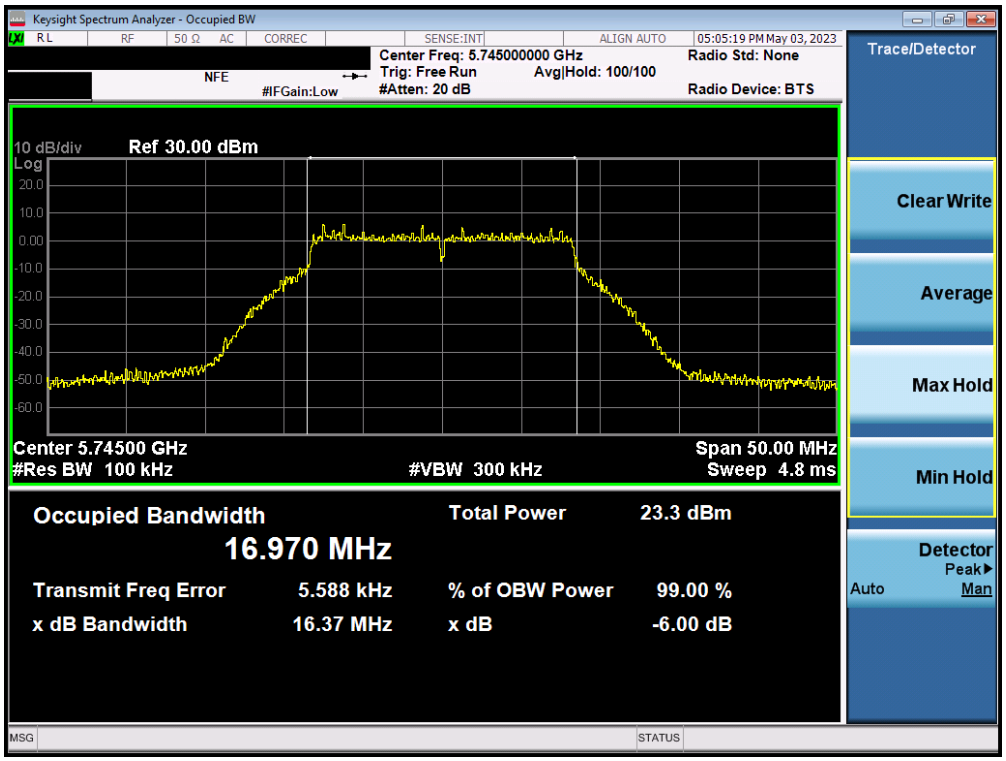

Plot 7-143. 6dB Bandwidth Plot ANT2 (802.11a (UNII Band 3) – Ch. 149)

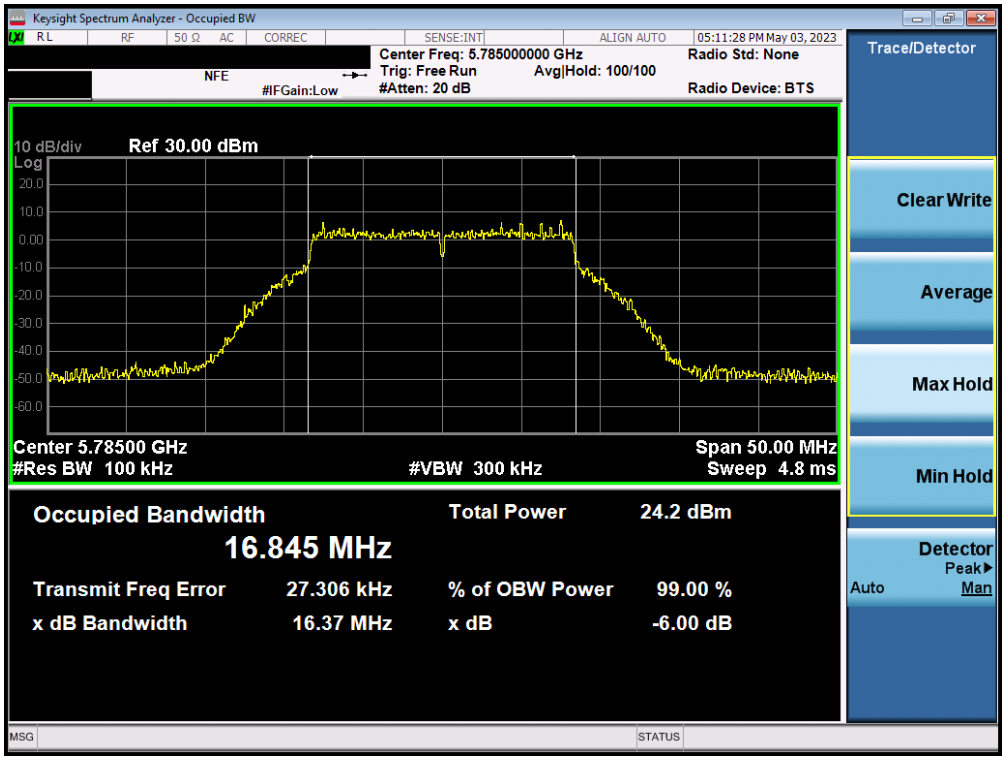

Plot 7-144. 6dB Bandwidth Plot ANT2 (802.11a (UNII Band 3) – Ch. 157)

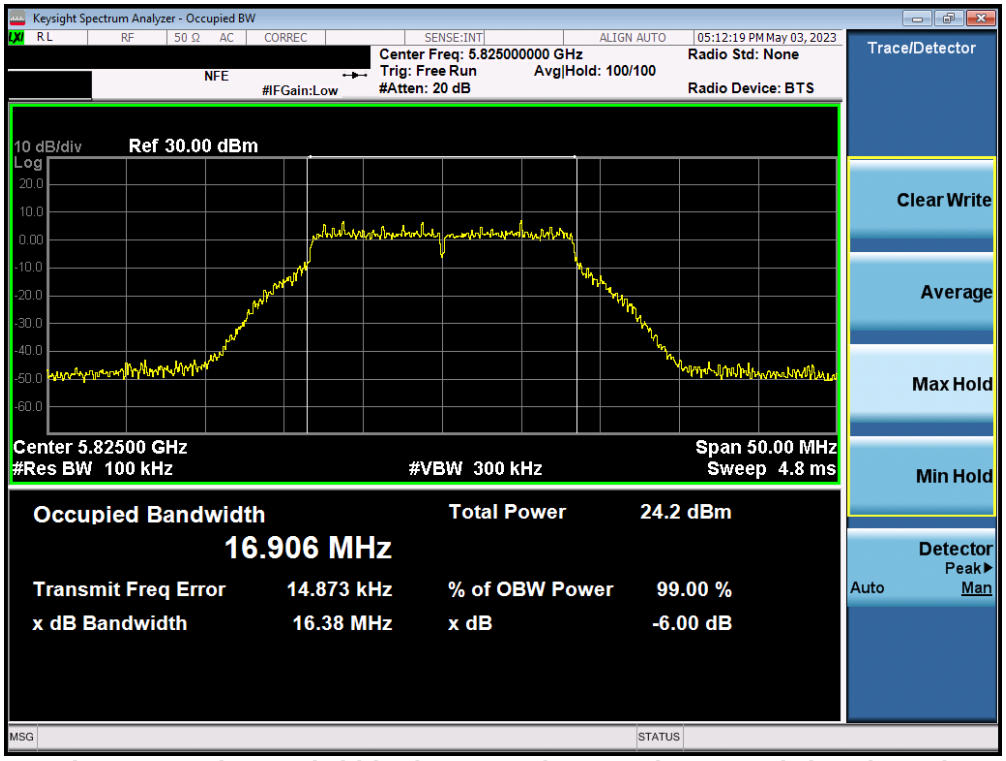

Plot 7-145. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) – Ch. 165)

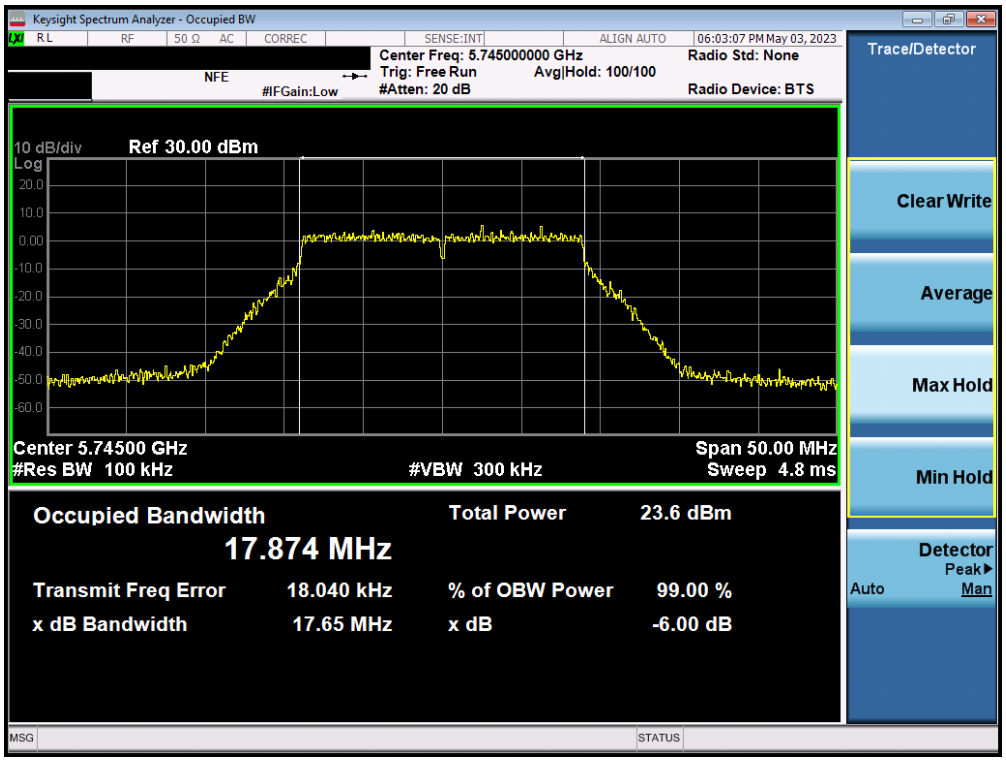

Plot 7-146. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

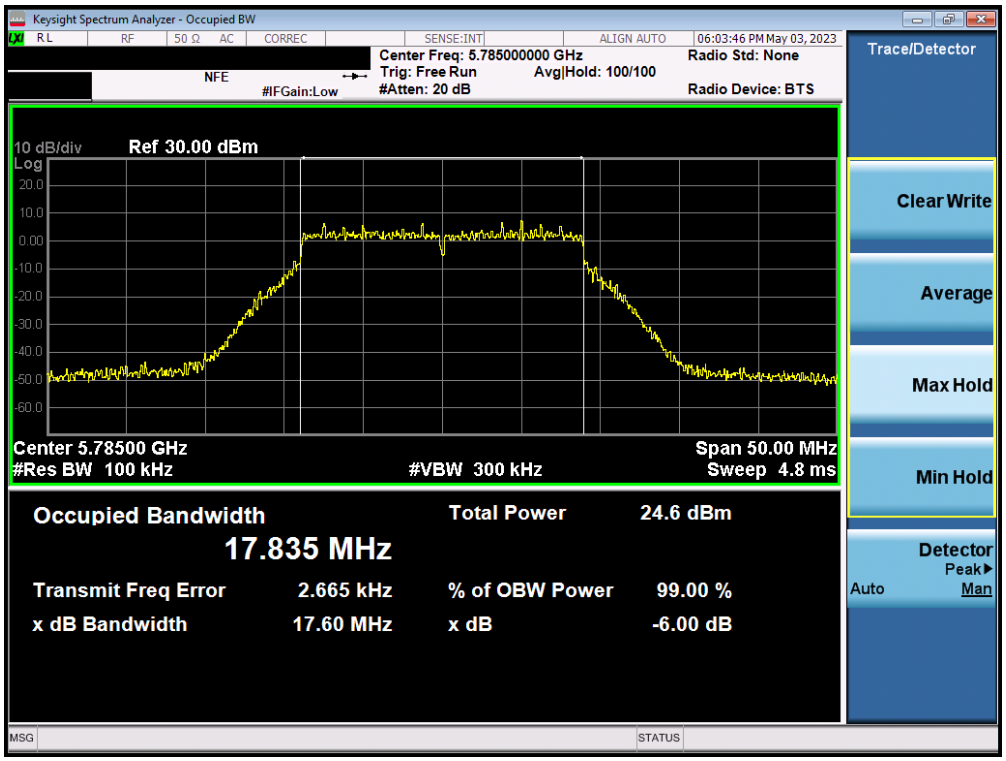

Plot 7-147. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

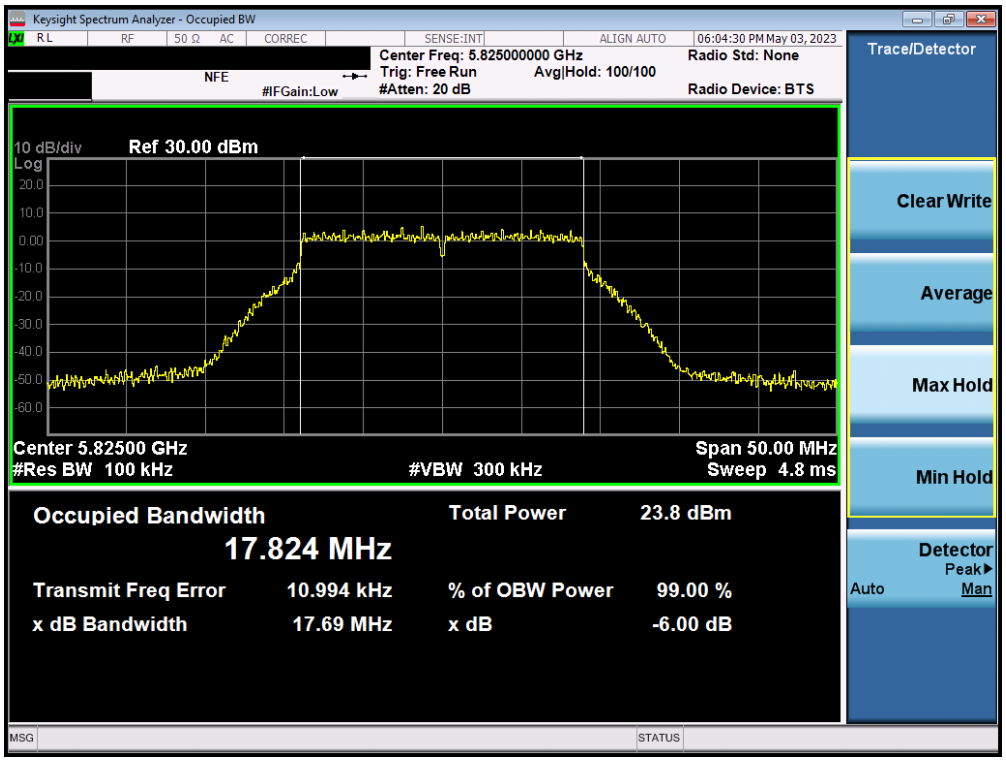

Plot 7-148. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

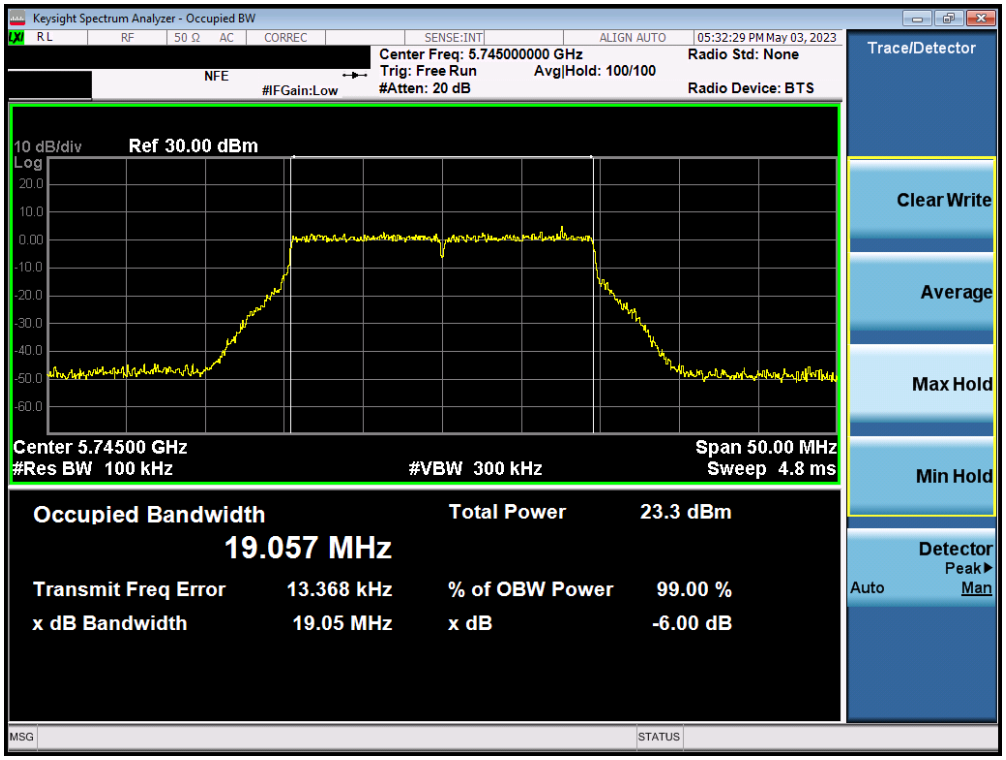

Plot 7-149. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

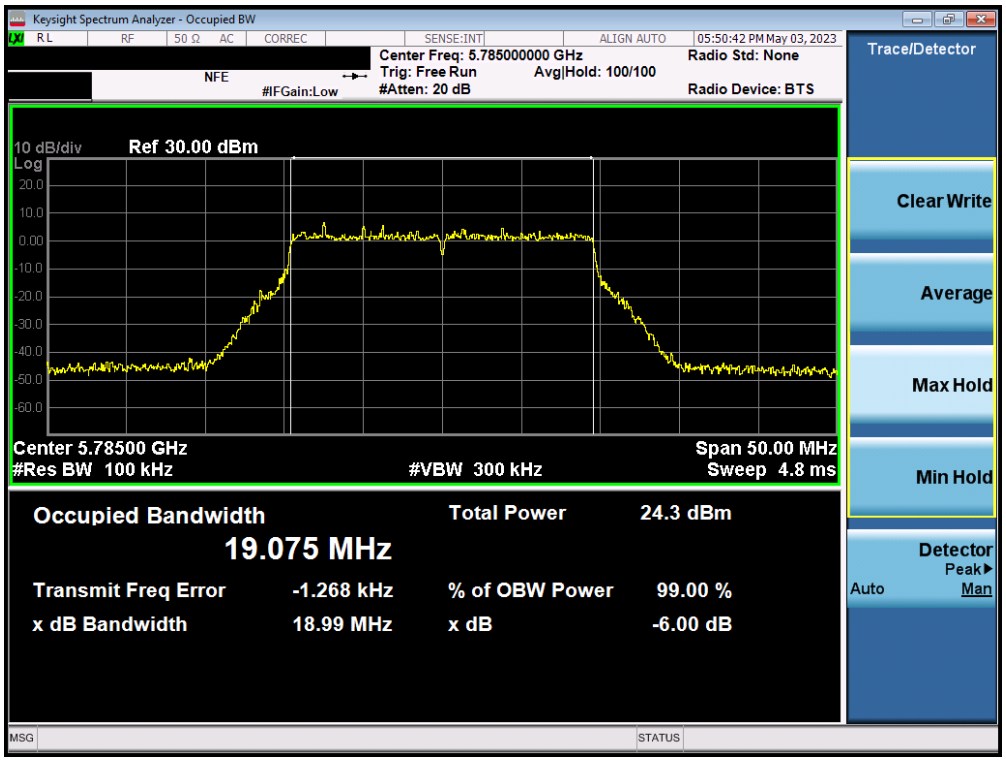

Plot 7-150. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

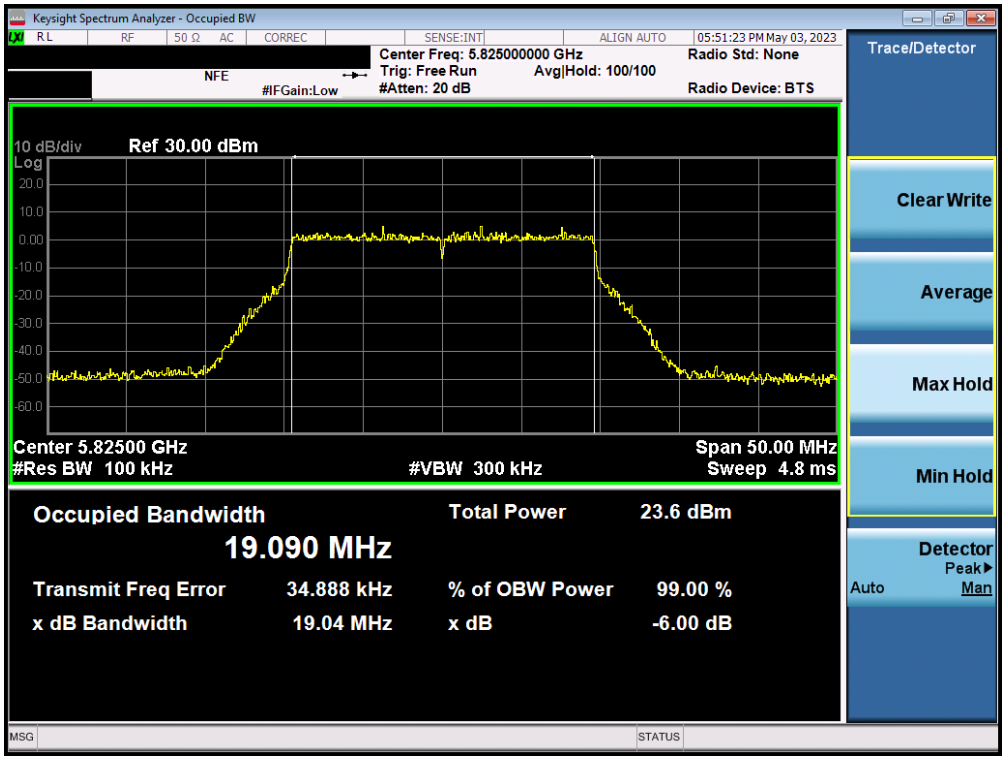

Plot 7-151. 6dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

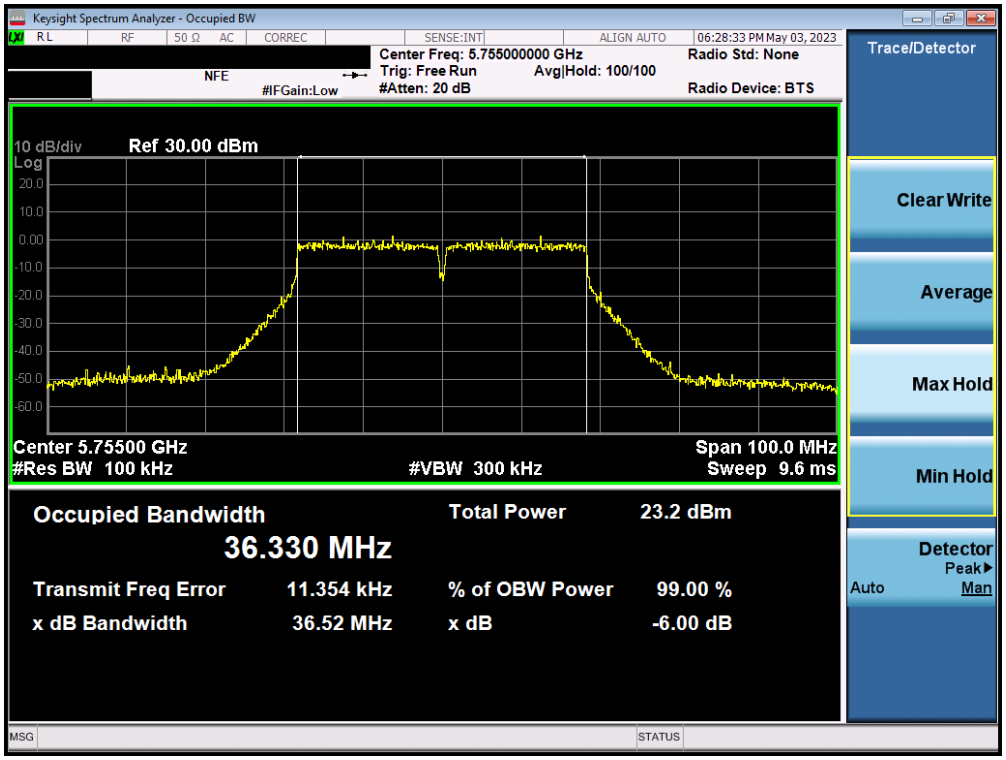

Plot 7-152. 6dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

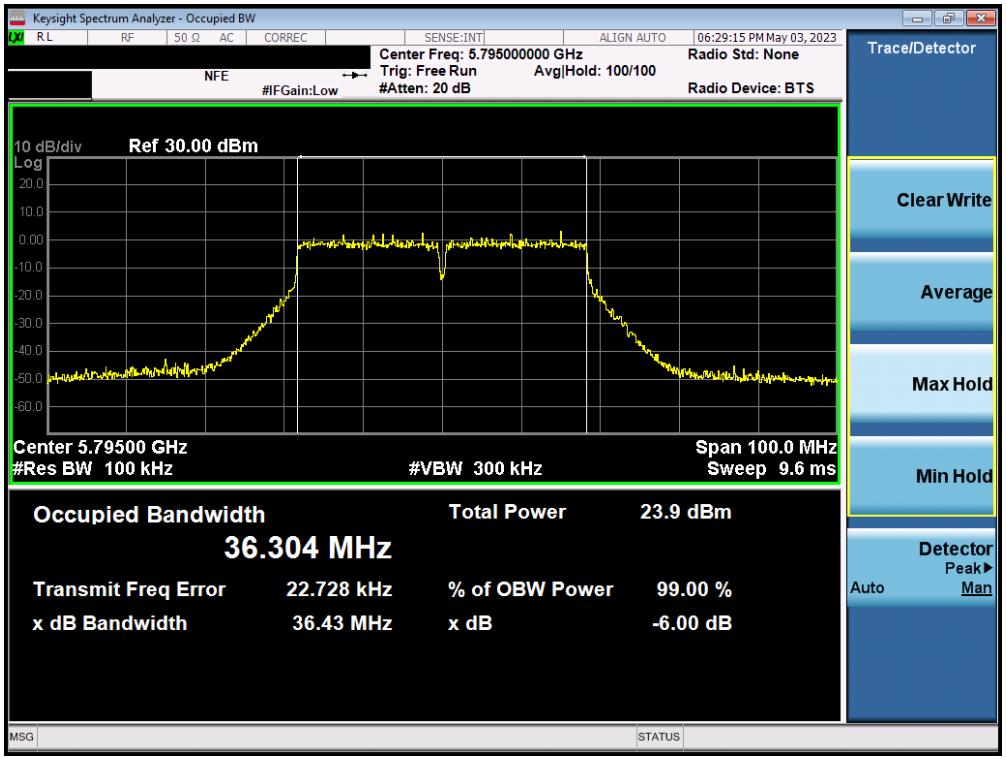

Plot 7-153. 6dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

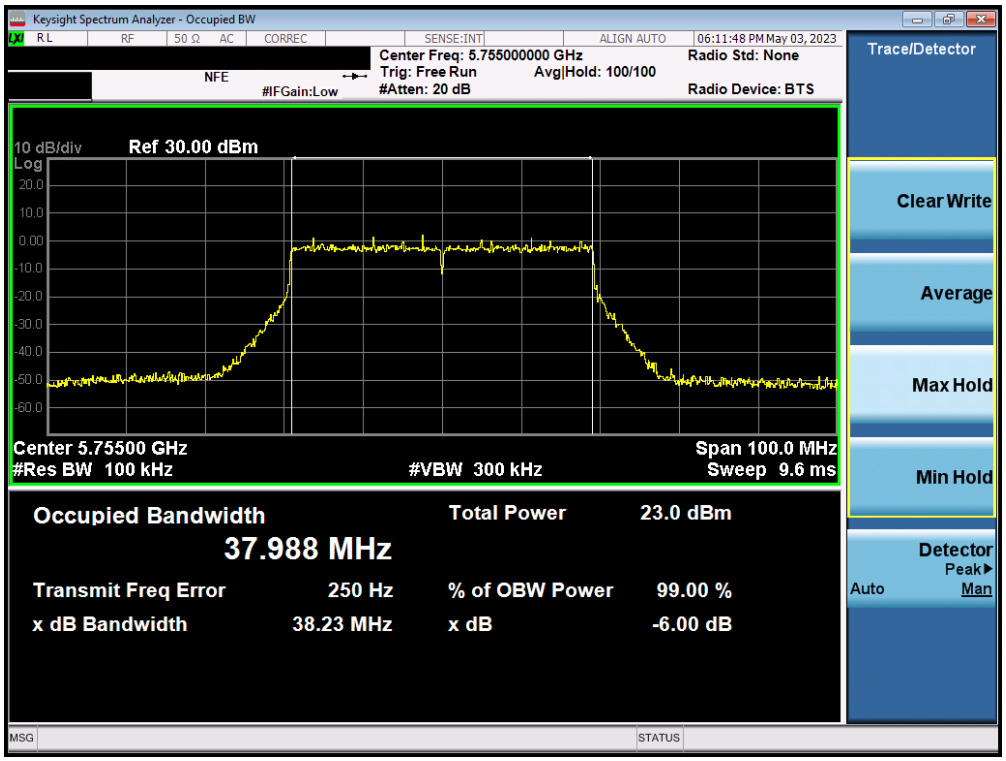

Plot 7-154. 6dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

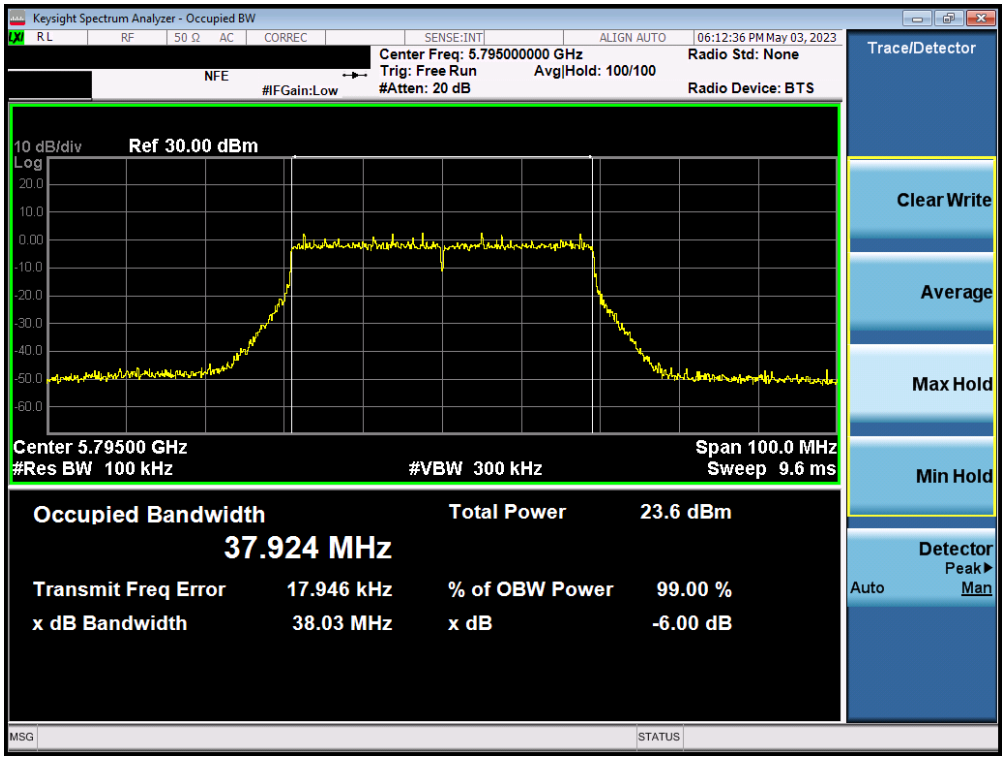

Plot 7-155. 6dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

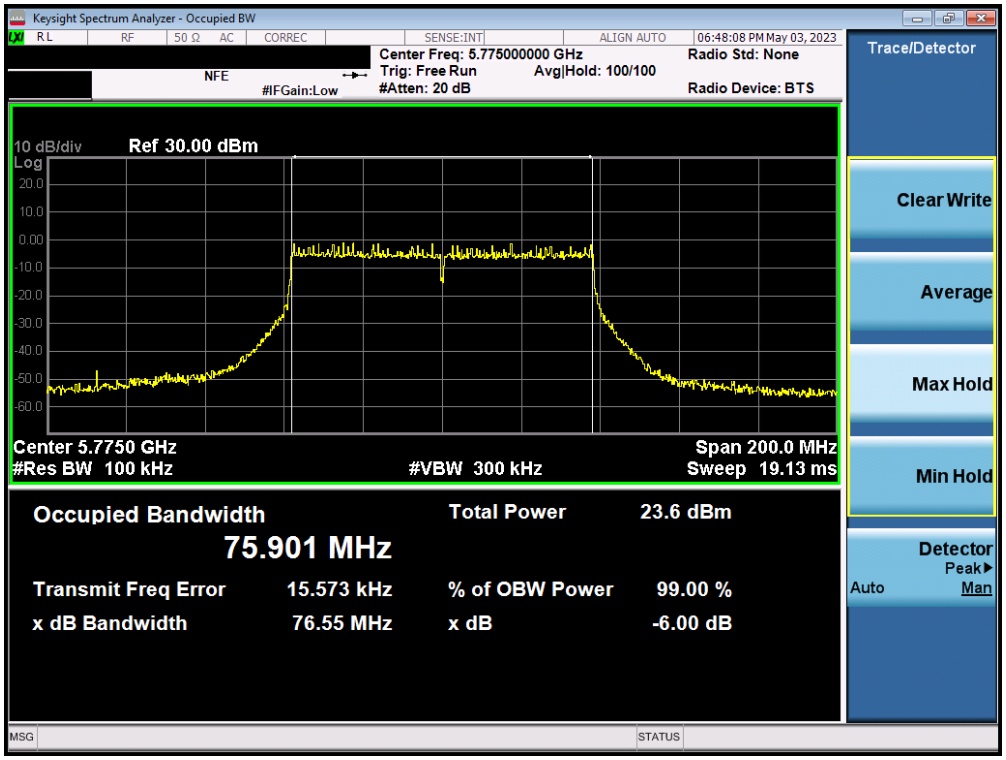

Plot 7-156. 6dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

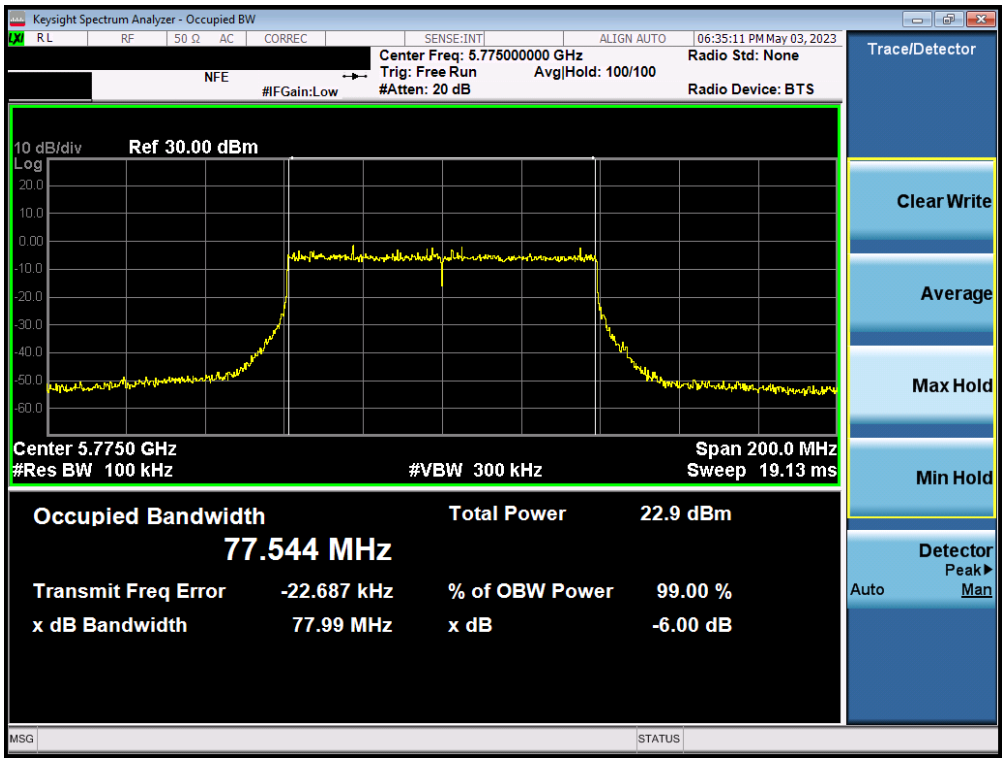

Plot 7-157. 6dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	a	6	16.39
Band 4	5865	173	a	6	16.46
	5885	177	a	6	16.38
Band 3/4	5845	169	n (20MHz)	6.5/7.2 (MCS0)	17.66
Band 4	5865	173	n (20MHz)	6.5/7.2 (MCS0)	17.66
	5885	177	n (20MHz)	6.5/7.2 (MCS0)	17.64
Band 3/4	5845	169	ax (20MHz)	6.5/7.2 (MCS0)	19.07
Band 4	5865	173	ax (20MHz)	6.5/7.2 (MCS0)	19.09
	5885	177	ax (20MHz)	6.5/7.2 (MCS0)	19.11
Band 3/4	5835	167	ac (40MHz)	13.5/15 (MCS0)	36.44
Band 4	5875	175	ac (40MHz)	13.5/15 (MCS0)	36.51
Band 3/4	5835	167	ax (40MHz)	13.5/15 (MCS0)	37.91
Band 4	5875	175	ax (40MHz)	13.5/15 (MCS0)	38.10
Band 3/4	5855	171	ac (80MHz)	29.3/32.5 (MCS0)	76.53
	5855	171	ax (80MHz)	29.3/32.5 (MCS0)	78.14
	5815	163	ac (160MHz)	58.5/65 (MCS0)	156.30
	5815	163	ax (160MHz)	58.5/65 (MCS0)	158.10

Table 7-7. Conducted Bandwidth Measurements Band 4 MIMO ANT2

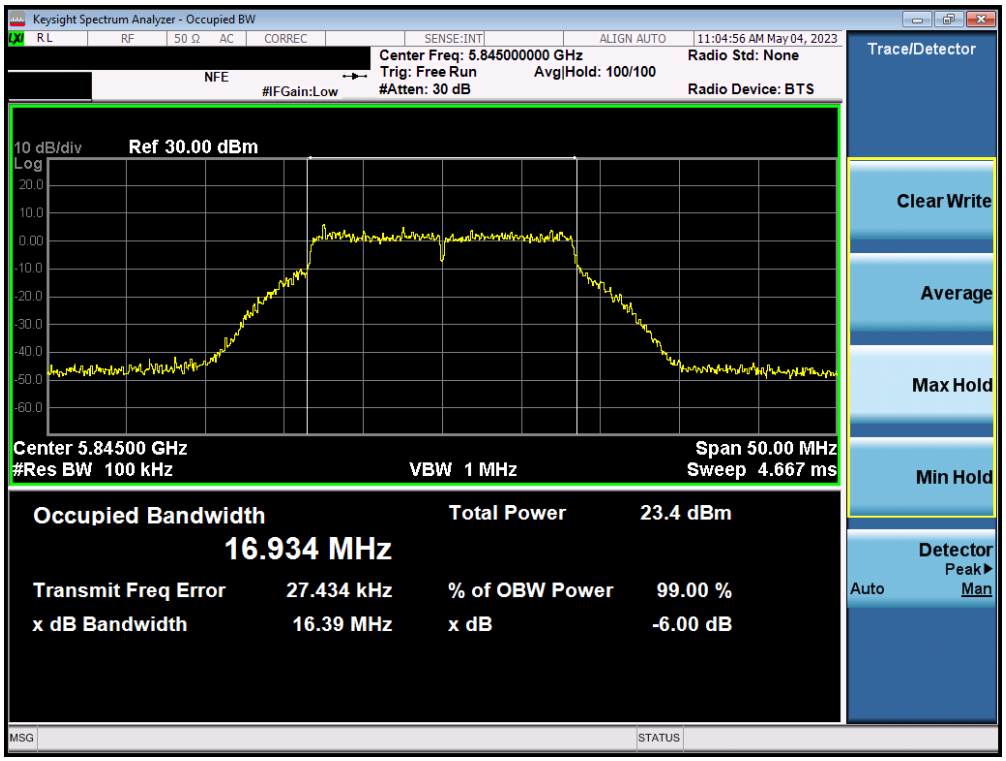

Plot 7-158. 6dB Bandwidth Plot MIMO ANT2 (802.11a (UNII Band 3/4) – Ch. 169)

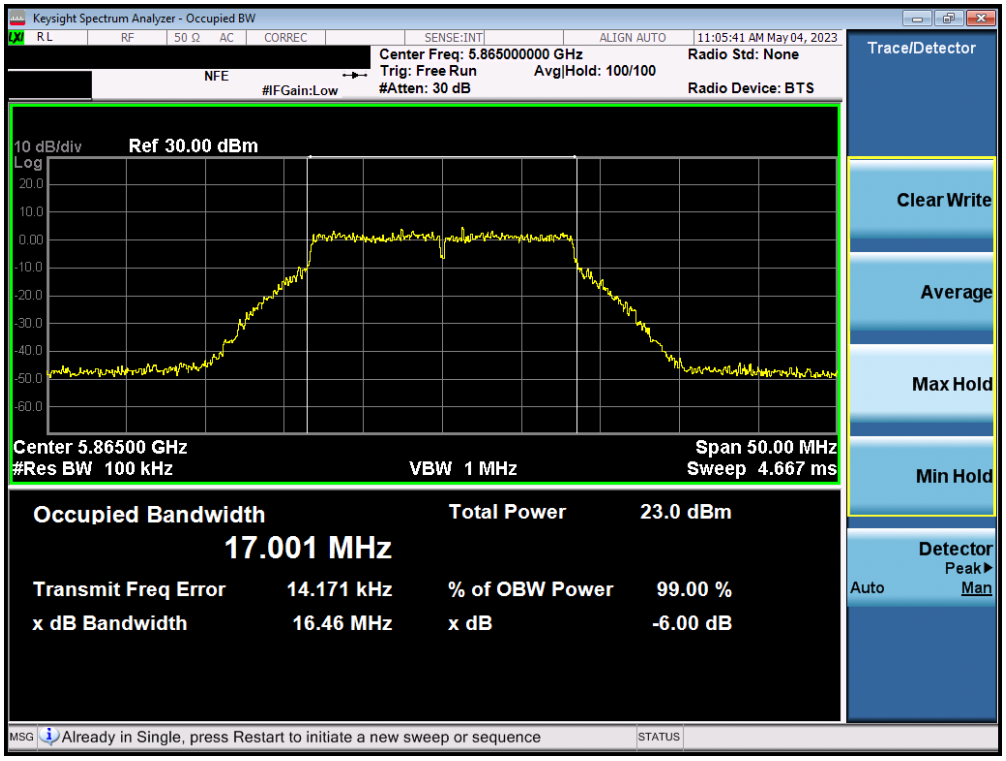

Plot 7-159. 6dB Bandwidth Plot MIMO ANT2 (802.11a (UNII Band 4) – Ch. 173)

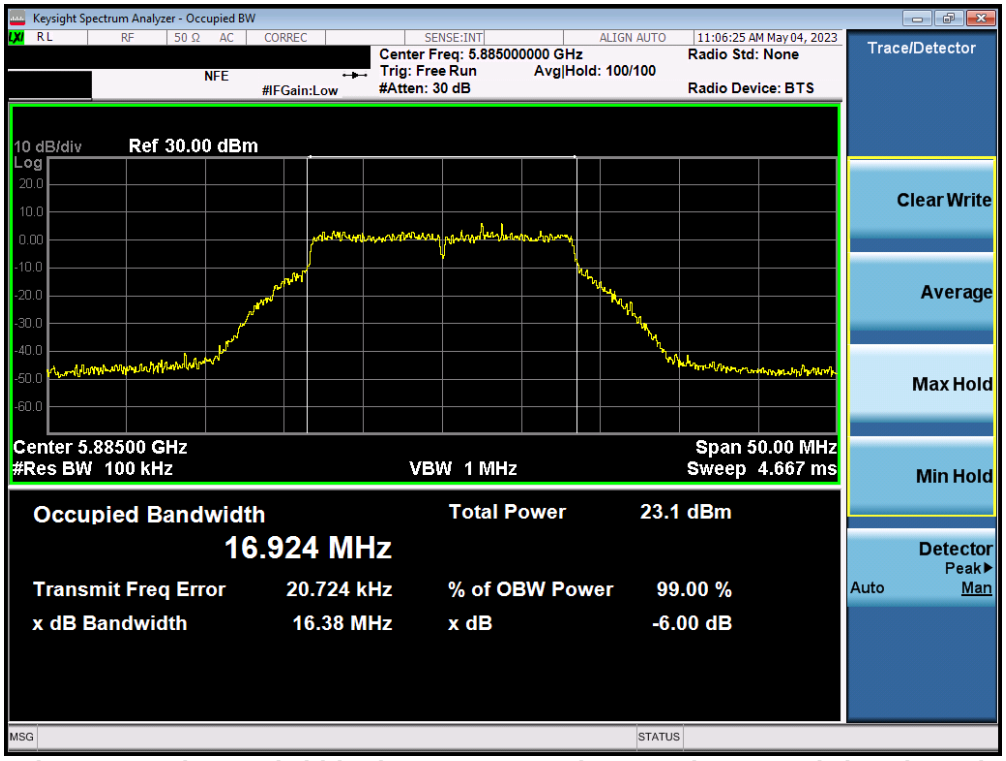

Plot 7-160. 6dB Bandwidth Plot MIMO ANT2 (802.11a (UNII Band 4) – Ch. 177)

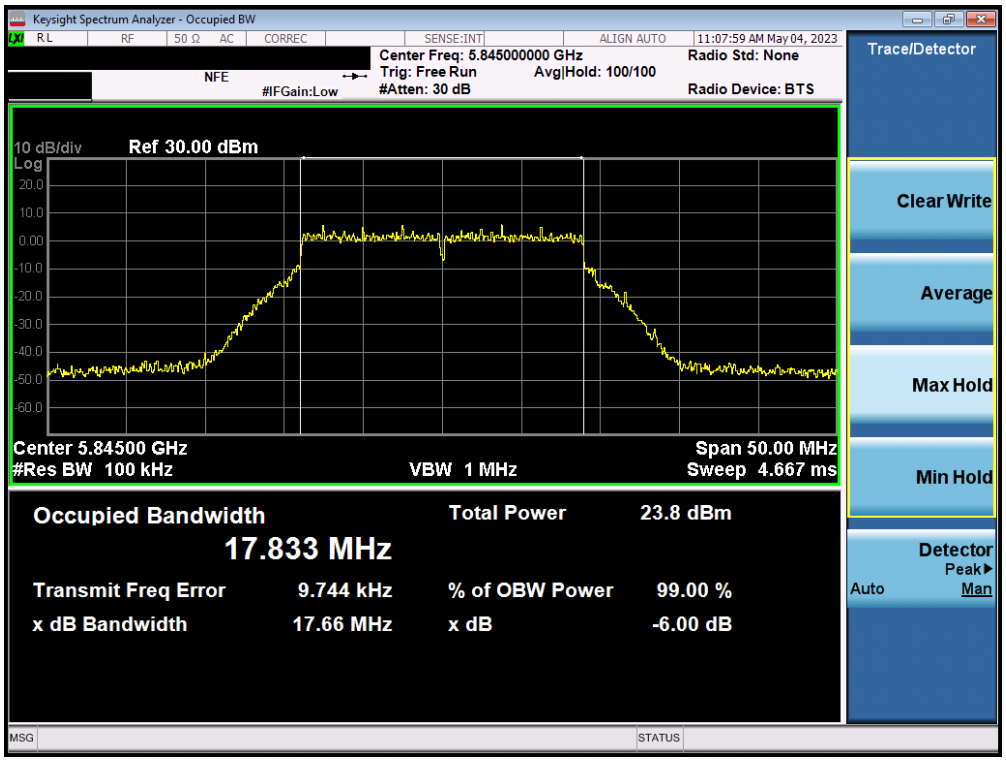

Plot 7-161. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11n (UNII Band 3/4) – Ch. 169)

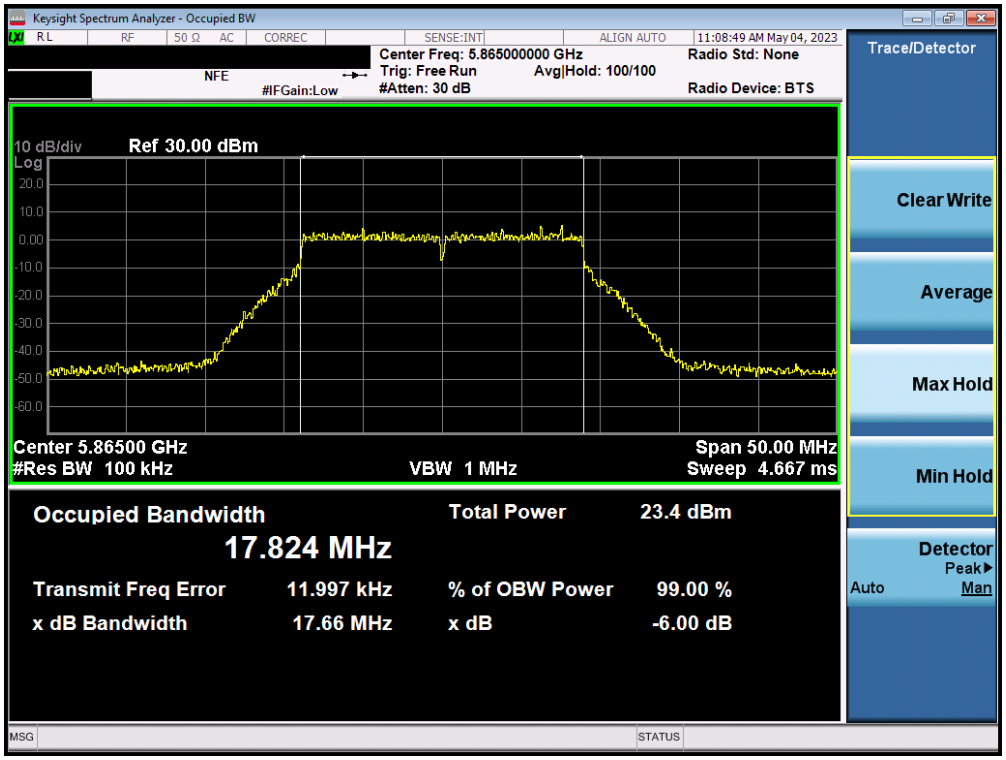

Plot 7-162. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11n (UNII Band 4) – Ch. 173)

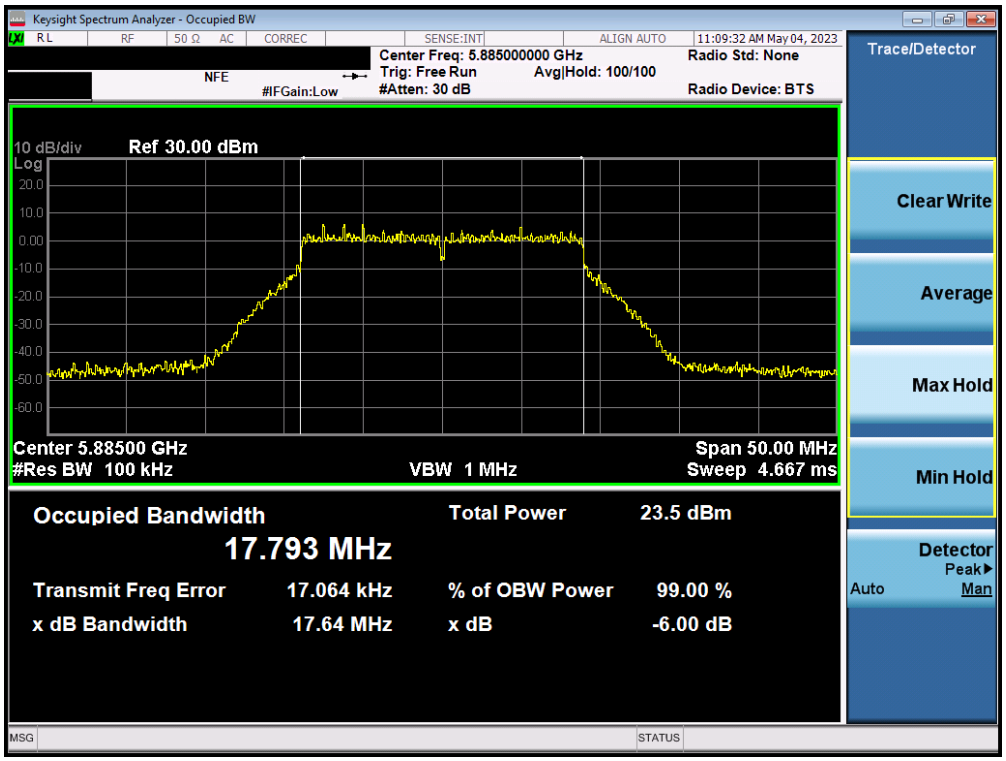

Plot 7-163. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11n (UNII Band 4) – Ch. 177)

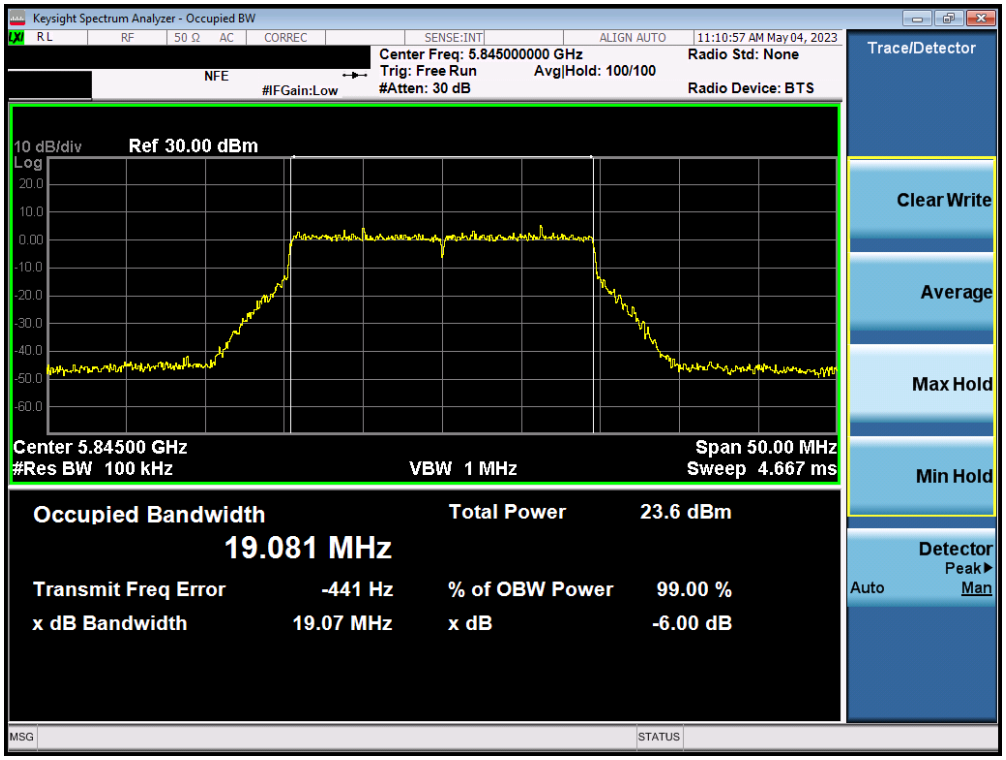

Plot 7-164. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (UNII Band 3/4) – Ch. 169)

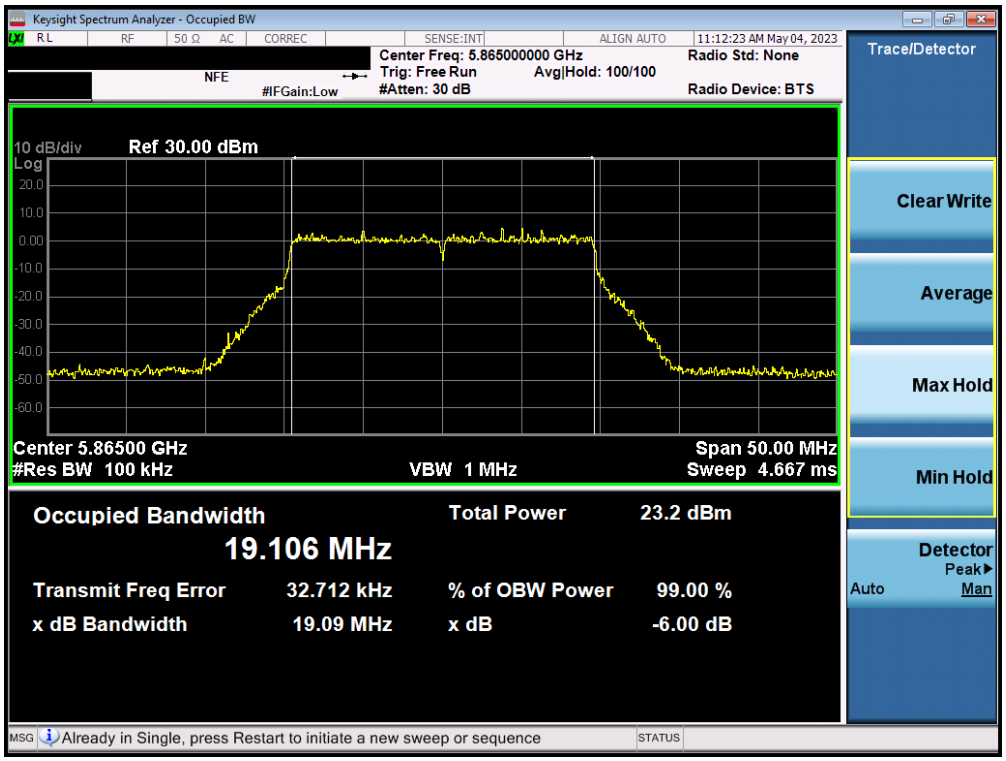

Plot 7-165. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (UNII Band 4) – Ch. 173)

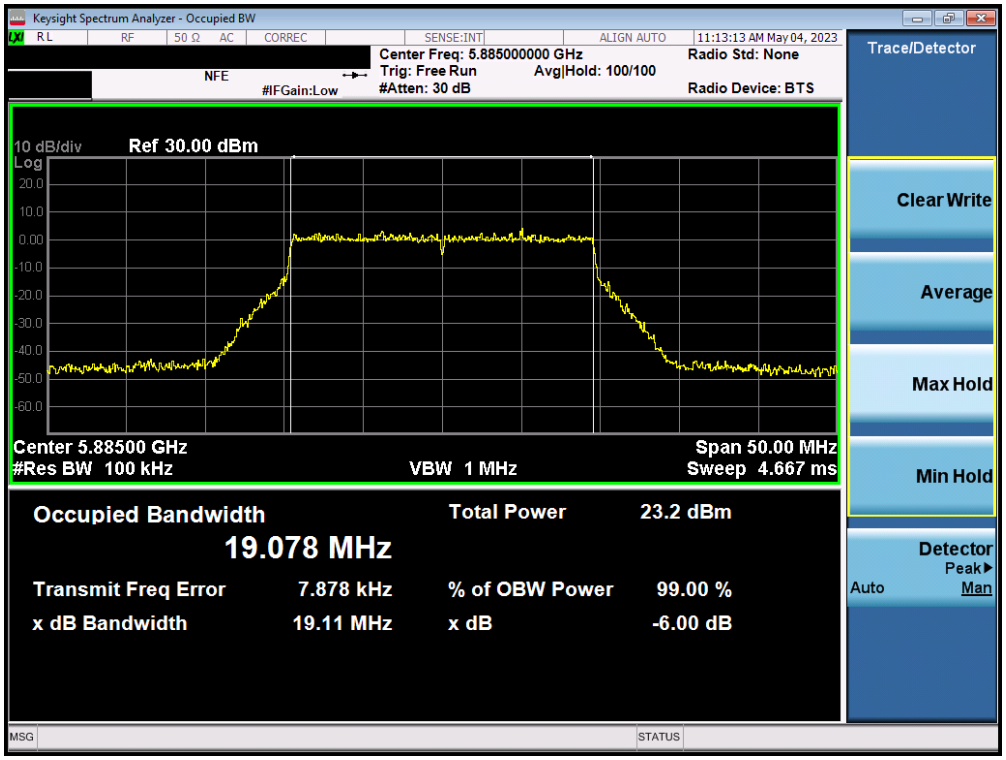

Plot 7-166. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (UNII Band 4) – Ch. 177)

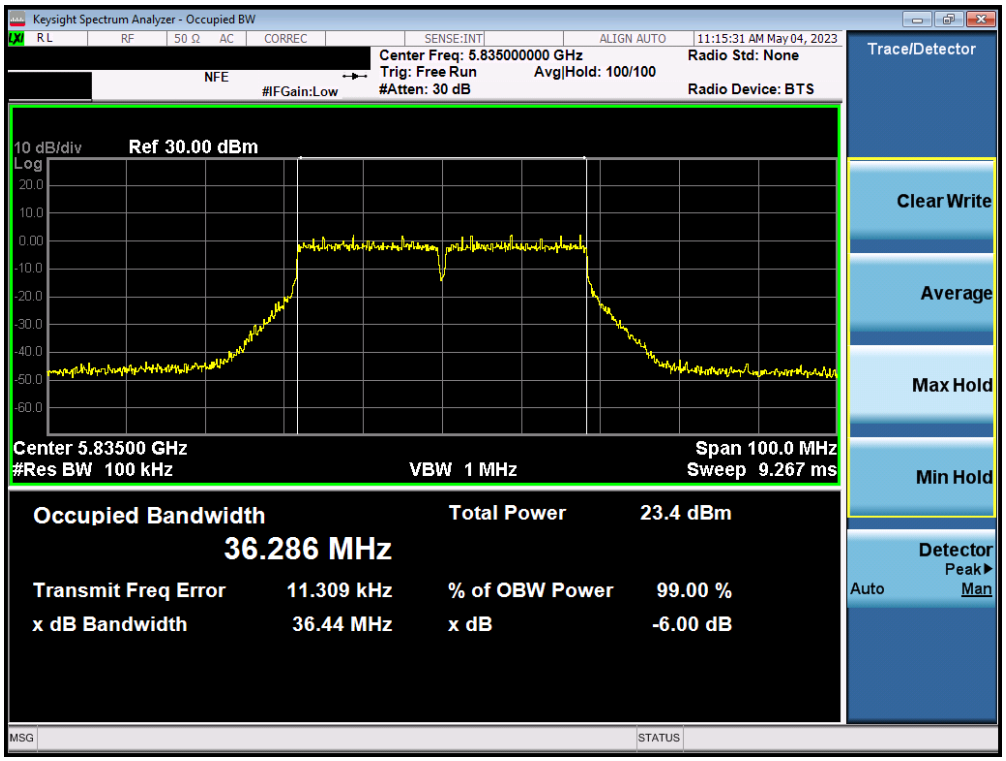

Plot 7-167. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ac (UNII Band 3/4) – Ch. 167)

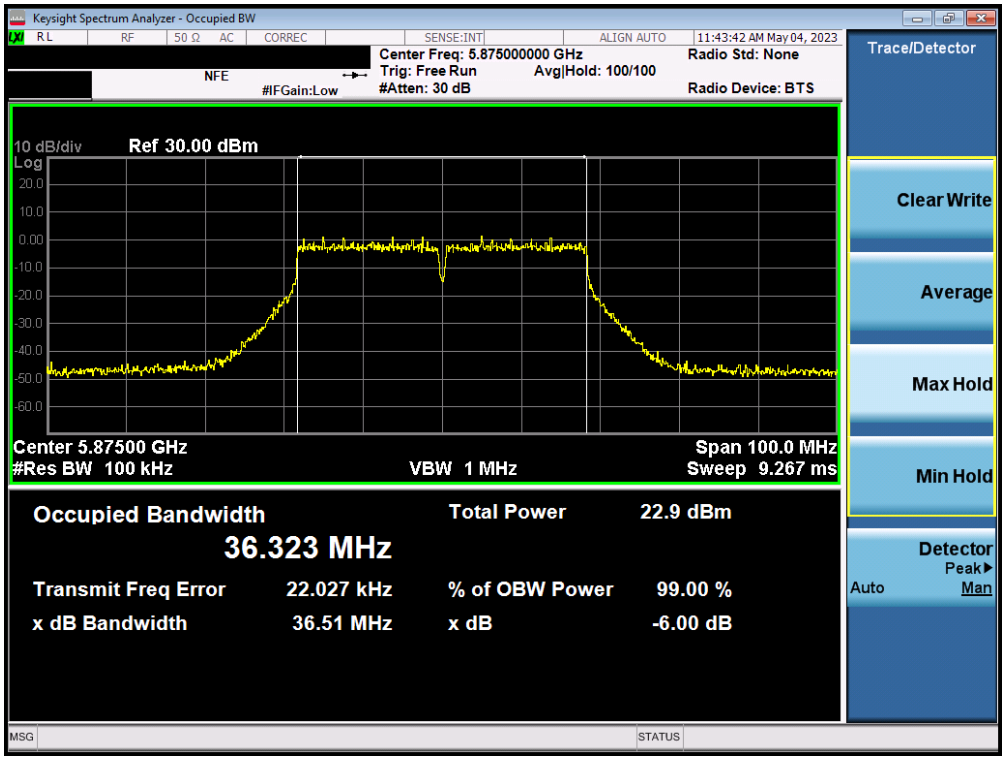

Plot 7-168. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ac (UNII Band 4) – Ch. 175)

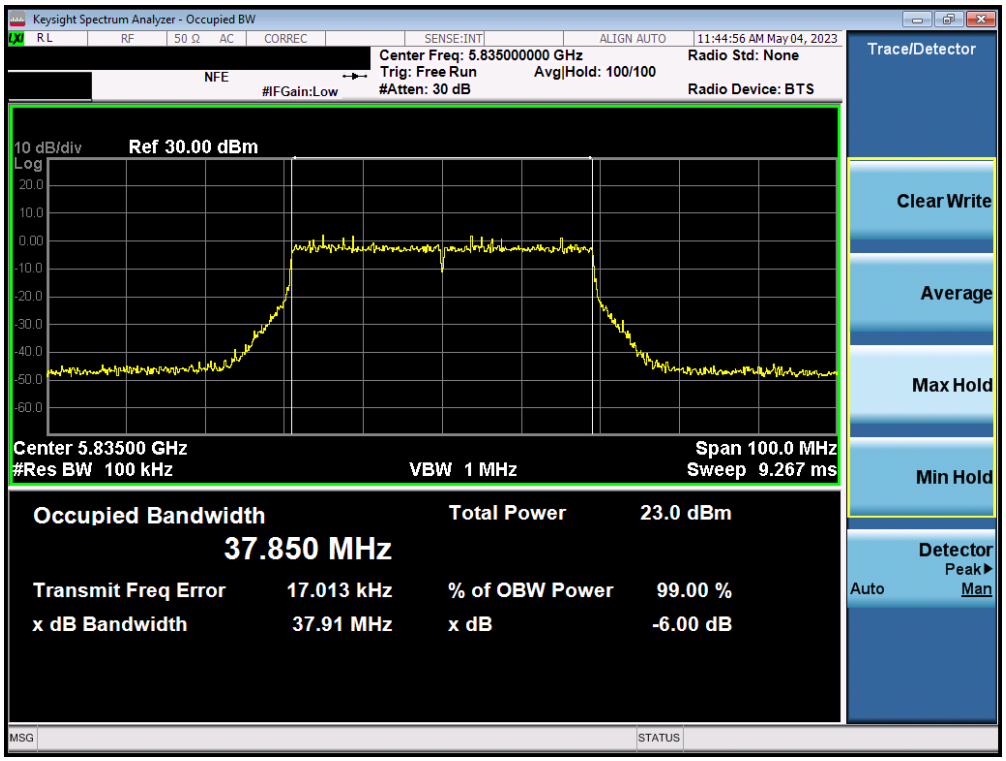

Plot 7-169. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (UNII Band 3/4) – Ch. 167)

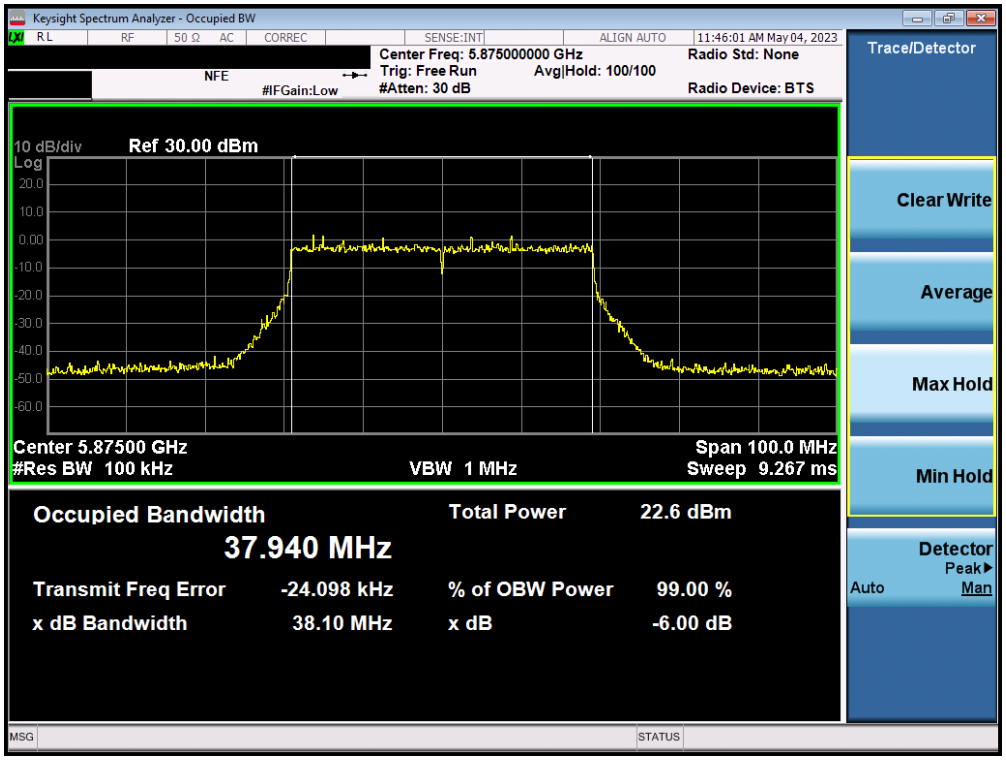

Plot 7-170. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (UNII Band 4) – Ch. 175)

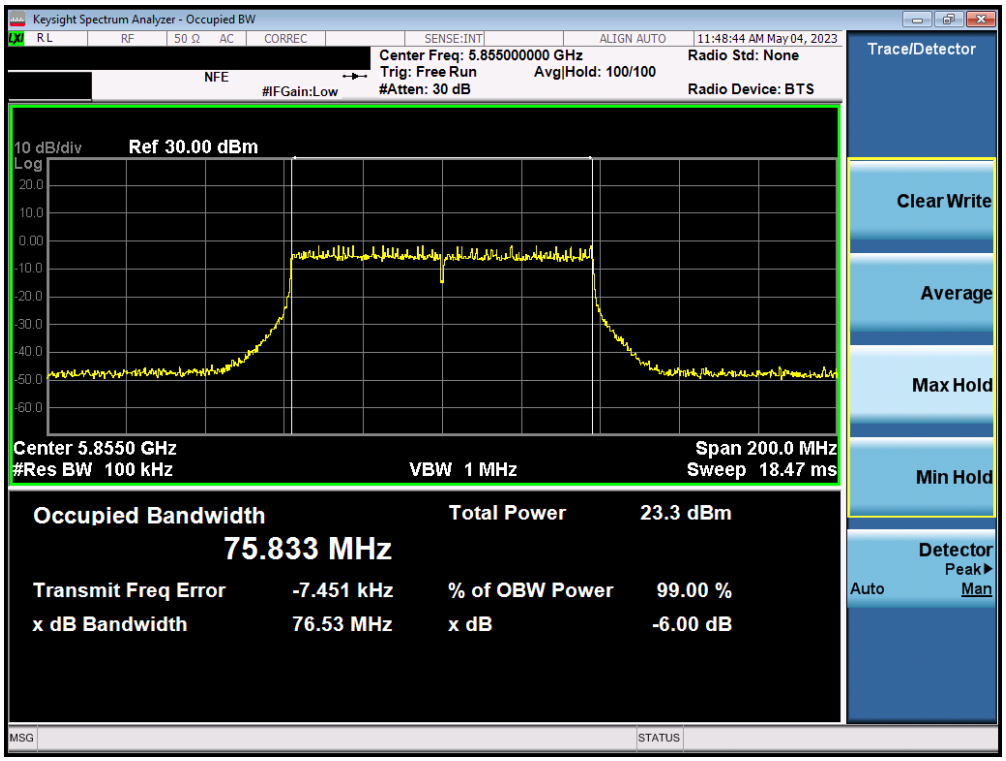

Plot 7-171. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ac (UNII Band 3/4) – Ch. 171)

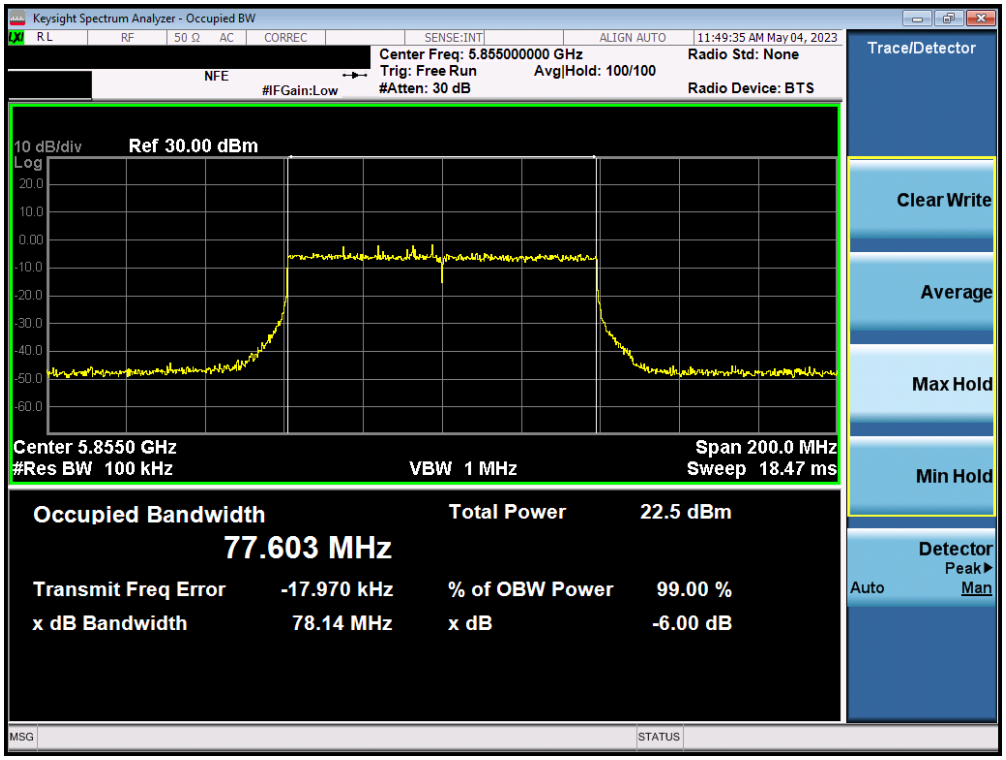

Plot 7-172. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (UNII Band 3/4) – Ch. 171)

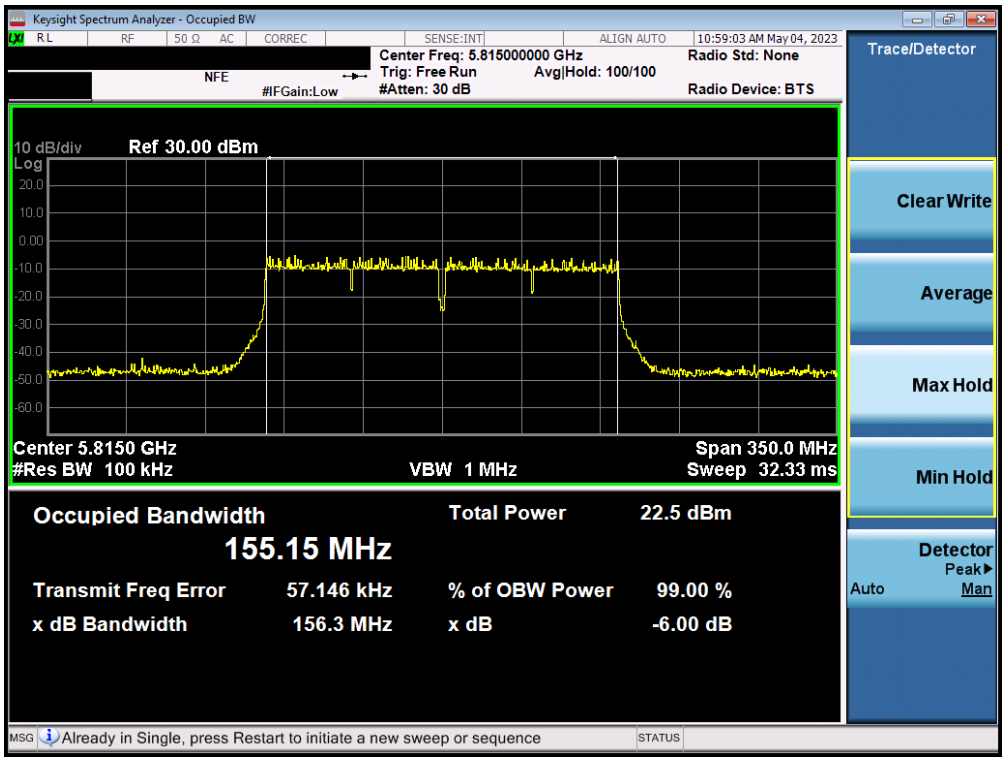

Plot 7-173. 6dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ac (UNII Band 3/4) – Ch. 163)

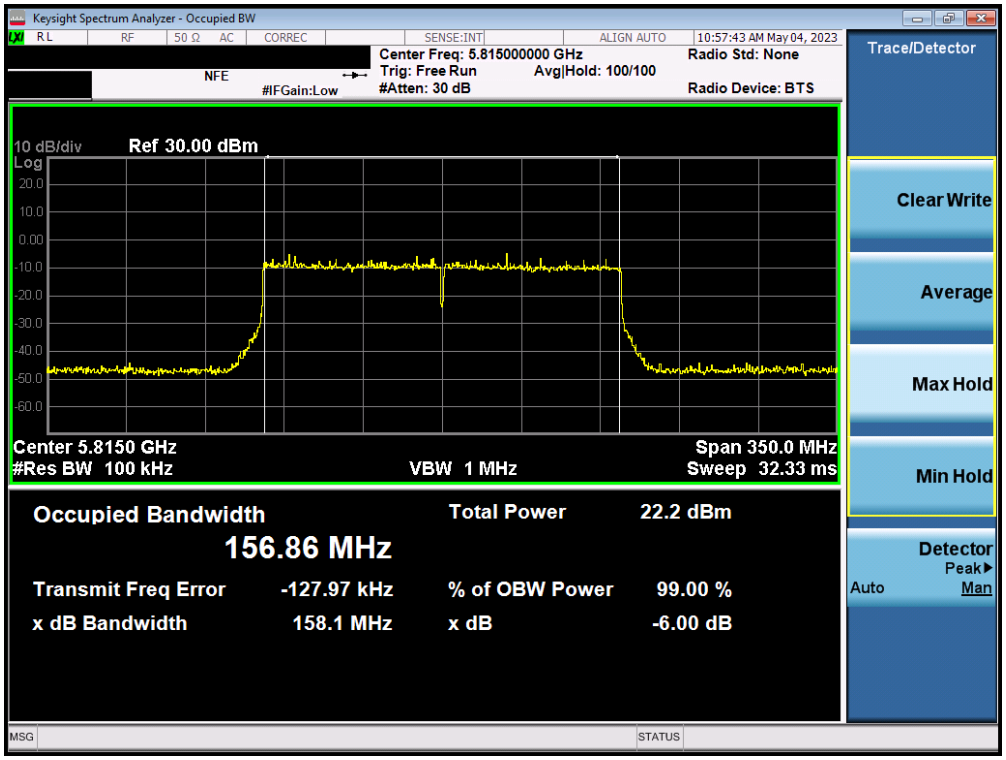

Plot 7-174. 6dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (UNII Band 3/4) – Ch. 163)

7.4 UNII Output Power Measurement – 802.11a/n/ac/ax

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or 10 + 10 log10B, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm + 10log$_{10}$(26dB BW) = 11 dBm + 10log$_{10}$(22.09) = 24.44dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm + 10log$_{10}$(26dB BW) = 11 dBm + 10log$_{10}$(22.35) = 24.49dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

In the 5.850 – 5.895 GHz band, the maximum permissible e.i.r.p is 30dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-3. Test Instrument & Measurement Setup

MIMO Maximum Conducted Output Power Measurements

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
5GHz (20MHz Bandwidth)	5180	36	AVG	17.75	17.69	20.73	23.98	-3.25	-3.24	17.49	23.01	-5.52
	5200	40	AVG	17.69	17.57	20.64	23.98	-3.34	-3.24	17.40	23.01	-5.61
	5220	44	AVG	17.25	17.39	20.33	23.98	-3.65	-3.24	17.09	23.01	-5.92
	5240	48	AVG	17.70	16.90	20.33	23.98	-3.65	-3.24	17.09	23.01	-5.92
	5260	52	AVG	17.38	17.22	20.31	23.98	-3.67	-2.69	17.62	30.00	-12.38
	5280	56	AVG	17.31	17.07	20.20	23.98	-3.78	-2.69	17.51	30.00	-12.49
	5300	60	AVG	16.77	17.35	20.08	23.98	-3.90	-2.69	17.39	30.00	-12.61
	5320	64	AVG	16.75	17.25	20.02	23.98	-3.96	-2.69	17.33	30.00	-12.67
	5500	100	AVG	17.52	17.45	20.50	23.98	-3.48	-2.56	17.94	30.00	-12.06
	5600	120	AVG	17.99	17.25	20.65	23.98	-3.33	-2.56	18.09	-	-
	5620	124	AVG	17.75	16.71	20.27	23.98	-3.71	-2.56	17.71	-	-
	5720	144	AVG	17.97	16.59	20.34	23.98	-3.64	-2.56	17.78	30.00	-12.22
	5745	149	AVG	17.74	16.74	20.28	30.00	-9.72	-3.36	16.92	-	-
	5785	157	AVG	17.32	17.31	20.33	30.00	-9.67	-3.36	16.97	-	-
	5825	165	AVG	17.85	17.50	20.69	30.00	-9.31	-3.36	17.33	-	-
	5845	169	AVG	17.50	17.06	20.30			-3.46	16.84	30.00	-13.16
	5865	173	AVG	17.58	17.08	20.35			-3.46	16.89	30.00	-13.11
	5885	177	AVG	17.72	17.09	20.43			-3.46	16.97	30.00	-13.03

Table 7-8. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
5GHz (20MHz Bandwidth)	5180	36	AVG	17.88	17.49	20.70	23.98	-3.28	-3.24	17.46	23.01	-5.55
	5200	40	AVG	17.75	17.79	20.78	23.98	-3.20	-3.24	17.54	23.01	-5.47
	5220	44	AVG	17.38	17.23	20.32	23.98	-3.66	-3.24	17.08	23.01	-5.93
	5240	48	AVG	17.48	17.01	20.26	23.98	-3.72	-3.24	17.02	23.01	-5.99
	5260	52	AVG	17.52	17.11	20.33	23.98	-3.65	-2.69	17.64	30.00	-12.36
	5280	56	AVG	17.22	17.07	20.16	23.98	-3.82	-2.69	17.47	30.00	-12.53
	5300	60	AVG	16.89	17.19	20.05	23.98	-3.93	-2.69	17.36	30.00	-12.64
	5320	64	AVG	16.51	17.14	19.85	23.98	-4.13	-2.69	17.16	30.00	-12.84
	5500	100	AVG	17.35	17.49	20.43	23.98	-3.55	-2.56	17.87	30.00	-12.13
	5600	120	AVG	17.51	16.86	20.21	23.98	-3.77	-2.56	17.65	-	-
	5620	124	AVG	17.52	16.85	20.21	23.98	-3.77	-2.56	17.65	-	-
	5720	144	AVG	17.94	16.46	20.27	23.98	-3.71	-2.56	17.71	30.00	-12.29
	5745	149	AVG	17.68	16.58	20.18	30.00	-9.82	-3.36	16.82	-	-
	5785	157	AVG	17.52	17.37	20.46	30.00	-9.54	-3.36	17.10	-	-
	5825	165	AVG	17.98	17.57	20.79	30.00	-9.21	-3.36	17.43	-	-
	5845	169	AVG	17.81	16.89	20.38			-3.46	16.92	30.00	-13.08
	5865	173	AVG	17.71	17.09	20.42			-3.46	16.96	30.00	-13.04
	5885	177	AVG	17.99	17.09	20.57			-3.46	17.11	30.00	-12.89

Table 7-9. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
5GHz (20MHz Bandwidth)	5180	36	AVG	17.78	17.47	20.64	23.98	-3.34	-3.24	17.40	23.01	-5.61
	5200	40	AVG	17.60	17.66	20.64	23.98	-3.34	-3.24	17.40	23.01	-5.61
	5220	44	AVG	17.40	17.15	20.29	23.98	-3.69	-3.24	17.05	23.01	-5.96
	5240	48	AVG	17.31	17.03	20.18	23.98	-3.80	-3.24	16.94	23.01	-6.07
	5260	52	AVG	17.36	17.03	20.21	23.98	-3.77	-2.69	17.52	30.00	-12.48
	5280	56	AVG	17.16	17.07	20.13	23.98	-3.85	-2.69	17.44	30.00	-12.56
	5300	60	AVG	16.82	17.33	20.09	23.98	-3.89	-2.69	17.40	30.00	-12.60
	5320	64	AVG	16.81	17.26	20.05	23.98	-3.93	-2.69	17.36	30.00	-12.64
	5500	100	AVG	17.19	17.64	20.43	23.98	-3.55	-2.56	17.87	30.00	-12.13
	5600	120	AVG	17.51	16.80	20.18	23.98	-3.80	-2.56	17.62	-	-
	5620	124	AVG	17.49	16.85	20.19	23.98	-3.79	-2.56	17.63	-	-
	5720	144	AVG	17.87	16.38	20.20	23.98	-3.78	-2.56	17.64	30.00	-12.36
	5745	149	AVG	17.67	16.36	20.07	30.00	-9.93	-3.36	16.71	-	-
	5785	157	AVG	17.47	17.32	20.41	30.00	-9.59	-3.36	17.05	-	-
	5825	165	AVG	17.64	16.94	20.31	30.00	-9.69	-3.36	16.95	-	-
	5845	169	AVG	17.59	16.91	20.27			-3.46	16.81	30.00	-13.19
	5865	173	AVG	17.70	17.07	20.41			-3.46	16.95	30.00	-13.05
	5885	177	AVG	17.84	17.05	20.47			-3.46	17.01	30.00	-12.99

Table 7-10. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
5GHz (20MHz Bandwidth)	5180	36	AVG	17.41	17.42	20.43	23.98	-3.55	-3.24	17.19	23.01	-5.82
	5200	40	AVG	17.92	17.71	20.83	23.98	-3.15	-3.24	17.59	23.01	-5.42
	5220	44	AVG	17.32	17.60	20.47	23.98	-3.51	-3.24	17.23	23.01	-5.78
	5240	48	AVG	17.61	16.94	20.30	23.98	-3.68	-3.24	17.06	23.01	-5.95
	5260	52	AVG	17.43	17.26	20.36	23.98	-3.62	-2.69	17.67	30.00	-12.33
	5280	56	AVG	17.29	17.05	20.18	23.98	-3.80	-2.69	17.49	30.00	-12.51
	5300	60	AVG	16.85	17.48	20.19	23.98	-3.79	-2.69	17.50	30.00	-12.50
	5320	64	AVG	16.22	16.82	19.54	23.98	-4.44	-2.69	16.85	30.00	-13.15
	5500	100	AVG	17.11	17.11	20.12	23.98	-3.86	-2.56	17.56	30.00	-12.44
	5600	120	AVG	17.62	16.99	20.33	23.98	-3.65	-2.56	17.77	-	-
	5620	124	AVG	17.79	16.89	20.37	23.98	-3.61	-2.56	17.81	-	-
	5720	144	AVG	17.99	16.55	20.34	23.98	-3.64	-2.56	17.78	30.00	-12.22
	5745	149	AVG	17.88	16.59	20.29	30.00	-9.71	-3.36	16.93	-	-
	5785	157	AVG	17.76	17.43	20.61	30.00	-9.39	-3.36	17.25	-	-
	5825	165	AVG	17.87	17.05	20.49	30.00	-9.51	-3.36	17.13	-	-
	5845	169	AVG	17.74	17.24	20.51			-3.46	17.05	30.00	-12.95
	5865	173	AVG	17.96	17.18	20.60			-3.46	17.14	30.00	-12.86
	5885	177	AVG	17.98	17.27	20.65			-3.46	17.19	30.00	-12.81

Table 7-11. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	16.84	16.50	19.68	23.98	-4.30	-3.24	16.44	23.01	-6.57
	5230	46	AVG	16.39	16.03	19.22	23.98	-4.76	-3.24	15.98	23.01	-7.03
	5270	54	AVG	16.28	16.12	19.21	23.98	-4.77	-2.69	16.52	30.00	-13.48
	5310	62	AVG	16.22	15.79	19.02	23.98	-4.96	-2.69	16.33	30.00	-13.67
	5510	102	AVG	15.92	16.04	18.99	23.98	-4.99	-2.56	16.43	30.00	-13.57
	5590	118	AVG	16.84	16.68	19.77	23.98	-4.21	-2.56	17.21	-	-
	5630	126	AVG	16.55	15.88	19.24	23.98	-4.74	-2.56	16.68	-	-
	5710	142	AVG	16.89	15.38	19.21	23.98	-4.77	-2.56	16.65	30.00	-13.35
	5755	151	AVG	16.76	15.87	19.35	30.00	-10.65	-3.36	15.99	-	-
	5795	159	AVG	16.77	16.67	19.73	30.00	-10.27	-3.36	16.37	-	-
	5835	167	AVG	16.65	16.19	19.44			-3.46	15.98	30.00	-14.02
	5875	175	AVG	16.99	16.20	19.62			-3.46	16.16	30.00	-13.84

Table 7-12. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	16.80	16.50	19.66	23.98	-4.32	-3.24	16.42	23.01	-6.59
	5230	46	AVG	16.31	16.00	19.17	23.98	-4.81	-3.24	15.93	23.01	-7.08
	5270	54	AVG	16.31	16.11	19.22	23.98	-4.76	-2.69	16.53	30.00	-13.47
	5310	62	AVG	15.38	15.66	18.53	23.98	-5.45	-2.69	15.84	30.00	-14.16
	5510	102	AVG	16.02	15.94	18.99	23.98	-4.99	-2.56	16.43	30.00	-13.57
	5590	118	AVG	16.89	16.71	19.81	23.98	-4.17	-2.56	17.25	-	-
	5630	126	AVG	16.55	15.90	19.25	23.98	-4.73	-2.56	16.69	-	-
	5710	142	AVG	16.91	15.51	19.28	23.98	-4.70	-2.56	16.72	30.00	-13.28
	5755	151	AVG	16.66	15.91	19.31	30.00	-10.69	-3.36	15.95	-	-
	5795	159	AVG	16.70	16.64	19.68	30.00	-10.32	-3.36	16.32	-	-
	5835	167	AVG	16.65	16.21	19.45			-3.46	15.99	30.00	-14.01
	5875	175	AVG	16.98	16.20	19.62			-3.46	16.16	30.00	-13.84

Table 7-13. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	16.87	16.48	19.69	23.98	-4.29	-3.24	16.45	23.01	-6.56
	5230	46	AVG	16.41	16.04	19.24	23.98	-4.74	-3.24	16.00	23.01	-7.01
	5270	54	AVG	16.46	16.20	19.34	23.98	-4.64	-2.69	16.65	30.00	-13.35
	5310	62	AVG	15.41	15.81	18.62	23.98	-5.36	-2.69	15.93	30.00	-14.07
	5510	102	AVG	16.11	16.01	19.07	23.98	-4.91	-2.56	16.51	30.00	-13.49
	5590	118	AVG	16.90	16.65	19.79	23.98	-4.19	-2.56	17.23	-	-
	5630	126	AVG	16.62	15.92	19.29	23.98	-4.69	-2.56	16.73	-	-
	5710	142	AVG	16.67	15.46	19.12	23.98	-4.86	-2.56	16.56	30.00	-13.44
	5755	151	AVG	16.63	15.93	19.30	30.00	-10.70	-3.36	15.94	-	-
	5795	159	AVG	16.76	16.65	19.72	30.00	-10.28	-3.36	16.36	-	-
	5835	167	AVG	16.64	16.19	19.43			-3.46	15.97	30.00	-14.03
	5875	175	AVG	16.99	16.18	19.61			-3.46	16.15	30.00	-13.85

Table 7-14. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5210	42	AVG	15.72	15.60	18.67	23.98	-5.31	-3.24	15.43	23.01	-7.58
	5290	58	AVG	15.14	15.04	18.10	23.98	-5.88	-2.69	15.41	30.00	-14.59
	5530	106	AVG	15.17	15.32	18.26	23.98	-5.72	-2.56	15.70	30.00	-14.30
	5690	138	AVG	15.98	14.31	18.24	23.98	-5.74	-2.56	15.68	30.00	-14.32
	5775	155	AVG	15.86	15.33	18.61	23.98	-5.37	-3.36	15.25	-	-
	5855	171	AVG	15.83	15.36	18.61			-3.46	15.15	30.00	-14.85

Table 7-15. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5210	42	AVG	15.87	15.73	18.81	23.98	-5.17	-3.24	15.57	23.01	-7.44
	5290	58	AVG	15.23	15.30	18.28	23.98	-5.70	-2.69	15.59	30.00	-14.41
	5530	106	AVG	15.33	15.55	18.45	23.98	-5.53	-2.56	15.89	30.00	-14.11
	5690	138	AVG	16.22	14.50	18.45	23.98	-5.53	-2.56	15.89	30.00	-14.11
	5775	155	AVG	15.99	15.42	18.72	23.98	-5.26	-3.36	15.36	-	-
	5855	171	AVG	16.10	15.57	18.85			-3.46	15.39	30.00	-14.61

Table 7-16. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5250	50	15.12	14.41	13.91	17.18	23.98	-6.80	-3.24	13.94	23.01	-9.07
	5570	114	15.21	14.47	14.56	17.53	30.00	-12.47	-2.56	14.97	-	-
	5815	163	15.53	14.35	14.23	17.30			-3.46	13.84	30.00	-16.16

Table 7-17. MIMO 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5250	50	AVG	14.63	14.08	17.37	23.98	-6.61	-3.24	14.13	23.01	-8.88
	5570	114	AVG	14.47	14.37	17.43	30.00	-12.57	-2.56	14.87	-	-
	5815	163	AVG	14.71	14.52	17.63			-3.46	14.17	30.00	-15.83

Table 7-18. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT}, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 17.88 dBm for Antenna 1 and 17.49 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

(17.88 dBm + 17.49 dBm) = (61.38 mW + 56.10 mW) = 117.48 mW = 20.70 dBm

Sample e.i.r.p Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO conducted power was calculated to be 20.70 dBm with directional gain of -3.24 dBi.

e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

20.70 dBm + (-3.24) dBi = 17.46 dBm

7.5 Maximum Power Spectral Density – 802.11a/n/ac/ax

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.25 – 5.35GHz and 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

In the 5.850 – 5.895 GHz, the maximum power spectral density must not exceed 14dBm/MHz e.i.r.p.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points ≥ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-4. Test Instrument & Measurement Setup

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	5.42	5.28	8.36	11.0	-2.64
	5200	40	a	6	6.06	5.22	8.67	11.0	-2.33
	5240	48	a	6	6.01	4.75	8.43	11.0	-2.57
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.50	4.81	8.18	11.0	-2.82
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.04	4.40	7.74	11.0	-3.26
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.18	4.19	7.72	11.0	-3.28
	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	5.35	4.99	8.18	11.0	-2.82
	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	5.18	5.31	8.26	11.0	-2.74
	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	5.34	4.16	7.80	11.0	-3.20
	5190	38	n (40MHz)	13.5/15 (MCS0)	1.25	0.94	4.11	11.0	-6.89
	5230	46	n (40MHz)	13.5/15 (MCS0)	1.24	0.30	3.80	11.0	-7.20
	5190	38	ax (40MHz)	13.5/15 (MCS0)	1.50	1.01	4.27	11.0	-6.73
	5230	46	ax (40MHz)	13.5/15 (MCS0)	1.17	0.65	3.93	11.0	-7.07
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-2.15	-2.53	0.67	11.0	-10.33
	5210	42	ax (80MHz)	29.3/32.5 (MCS0)	-2.10	-2.51	0.71	11.0	-10.29
	5250	50	ac (160MHz)	29.3/32.5 (MCS0)	-7.30	-8.51	-4.85	11.0	-15.85
	5250	50	ax (160MHz)	29.3/32.5 (MCS0)	-6.91	-7.87	-4.35	11.0	-15.35
Band 2A	5260	52	a	6	5.17	4.83	8.01	11.0	-2.99
	5280	56	a	6	5.24	4.75	8.01	11.0	-2.99
	5320	64	a	6	6.07	5.27	8.70	11.0	-2.30
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.35	4.60	8.00	11.0	-3.00
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	5.16	4.45	7.83	11.0	-3.17
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	5.03	4.68	7.87	11.0	-3.13
	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	5.52	4.43	8.02	11.0	-2.98
	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	5.14	5.00	8.08	11.0	-2.92
	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	5.02	4.77	7.91	11.0	-3.09
	5270	54	n (40MHz)	13.5/15 (MCS0)	1.42	0.38	3.94	11.0	-7.06
	5310	62	n (40MHz)	13.5/15 (MCS0)	1.14	0.87	4.02	11.0	-6.98
	5270	54	ax (40MHz)	13.5/15 (MCS0)	1.41	0.82	4.13	11.0	-6.87
	5310	62	ax (40MHz)	13.5/15 (MCS0)	1.51	0.80	4.18	11.0	-6.82
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-2.33	-3.27	0.24	11.0	-10.76
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	-2.19	-2.95	0.46	11.0	-10.54
Band 2C	5500	100	a	6	6.47	5.45	9.00	11.0	-2.00
	5600	120	a	6	7.35	6.51	9.96	11.0	-1.04
	5720	144	a	6	7.58	5.81	9.79	11.0	-1.21
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.13	5.25	8.72	11.0	-2.28
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	6.17	5.17	8.71	11.0	-2.29
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	6.77	5.29	9.10	11.0	-1.90
	5500	100	ax (20MHz)	6.5/7.2 (MCS0)	5.57	4.77	8.20	11.0	-2.80
	5600	120	ax (20MHz)	6.5/7.2 (MCS0)	6.28	5.48	8.91	11.0	-2.09
	5720	144	ax (20MHz)	6.5/7.2 (MCS0)	6.84	5.41	9.19	11.0	-1.81
	5510	102	n (40MHz)	13.5/15 (MCS0)	2.07	0.66	4.43	11.0	-6.57
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.80	1.87	5.37	11.0	-5.63
	5710	142	n (40MHz)	13.5/15 (MCS0)	2.85	1.15	5.09	11.0	-5.91
	5510	102	ax (40MHz)	13.5/15 (MCS0)	2.10	1.26	4.71	11.0	-6.29
	5590	118	ax (40MHz)	13.5/15 (MCS0)	2.71	2.06	5.41	11.0	-5.59
	5710	142	ax (40MHz)	13.5/15 (MCS0)	3.02	1.44	5.31	11.0	-5.69
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-2.37	-3.22	0.24	11.0	-10.76
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-1.54	-2.96	0.82	11.0	-10.18
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-4.09	-5.53	-1.74	11.0	-12.74
	5530	106	ax (80MHz)	29.3/32.5 (MCS0)	-2.48	-2.72	0.42	11.0	-10.58
	5610	122	ax (80MHz)	29.3/32.5 (MCS0)	-1.37	-3.15	0.84	11.0	-10.16
	5690	138	ax (80MHz)	29.3/32.5 (MCS0)	-3.45	-5.31	-1.27	11.0	-12.27
	5570	114	ac (160MHz)	29.3/32.5 (MCS0)	-6.27	-7.24	-3.72	11.0	-14.72
	5570	114	ax (160MHz)	29.3/32.5 (MCS0)	-6.48	-7.18	-3.80	11.0	-14.80

Table 7-19. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	4.87	3.11	7.09	30.0	-22.91
	5785	157	a	6	4.88	4.01	7.48	30.0	-22.52
	5825	165	a	6	5.18	4.14	7.70	30.0	-22.30
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	4.02	2.62	6.39	30.0	-23.61
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.57	3.61	6.60	30.0	-23.40
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.16	2.76	5.97	30.0	-24.03
	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	4.42	2.69	6.65	30.0	-23.35
	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	3.76	3.50	6.64	30.0	-23.36
	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	3.28	2.82	6.06	30.0	-23.94
	5755	151	n (40MHz)	13.5/15 (MCS0)	-0.21	-1.11	2.38	30.0	-27.62
	5795	159	n (40MHz)	13.5/15 (MCS0)	-0.21	-0.48	2.67	30.0	-27.33
	5755	151	ax (40MHz)	13.5/15 (MCS0)	-0.32	-0.77	2.47	30.0	-27.53
	5795	159	ax (40MHz)	13.5/15 (MCS0)	-0.12	-0.03	2.94	30.0	-27.06
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-0.89	-1.55	1.80	30.0	-28.20
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	-0.65	-1.23	2.08	30.0	-27.92

Table 7-20. Band 3 MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	MIMO Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 4	5845	169	a	6	7.92	6.37	10.22	-3.46	6.76	14.00	-7.24
	5865	173	a	6	7.34	6.16	9.80	-3.46	6.34	14.00	-7.66
	5885	177	a	6	7.67	5.63	9.78	-3.46	6.32	14.00	-7.68
Band 4	5845	169	n (20MHz)	6.5/7.2 (MCS0)	6.05	5.23	8.67	-3.46	5.21	14.00	-8.79
	5865	173	n (20MHz)	6.5/7.2 (MCS0)	6.26	5.42	8.87	-3.46	5.41	14.00	-8.59
	5885	177	n (20MHz)	6.5/7.2 (MCS0)	6.48	5.53	9.04	-3.46	5.58	14.00	-8.42
Band 4	5845	169	ax (20MHz)	6.5/7.2 (MCS0)	5.38	5.50	8.45	-3.46	4.99	14.00	-9.01
	5865	173	ax (20MHz)	6.5/7.2 (MCS0)	5.53	5.17	8.36	-3.46	4.90	14.00	-9.10
	5885	177	ax (20MHz)	6.5/7.2 (MCS0)	5.49	5.40	8.45	-3.46	4.99	14.00	-9.01
Band 4	5835	167	n (40MHz)	13.5/15 (MCS0)	2.03	1.57	4.82	-3.46	1.36	14.00	-12.64
	5875	175	n (40MHz)	13.5/15 (MCS0)	2.12	1.15	4.67	-3.46	1.21	14.00	-12.79
Band 4	5835	167	ax (40MHz)	13.5/15 (MCS0)	1.86	1.46	4.68	-3.46	1.22	14.00	-12.78
	5875	175	ax (40MHz)	13.5/15 (MCS0)	1.82	1.69	4.77	-3.46	1.31	14.00	-12.69
Band 3/4	5855	171	ac (80MHz)	29.3/32.5 (MCS0)	-1.00	-1.68	1.68	-3.46	-1.78	14.00	-15.78
	5855	171	ax (80MHz)	29.3/32.5 (MCS0)	-1.19	-1.85	1.50	-3.46	-1.96	14.00	-15.96
	5815	163	ac (160MHz)	58.5/65 (MCS0)	-6.52	-6.54	-3.52	-3.46	-6.98	14.00	-20.98
	5815	163	ax (160MHz)	58.5/65 (MCS0)	-6.01	-6.11	-3.05	-3.46	-6.51	14.00	-20.51

Table 7-21. Band 3/4 MIMO Conducted Power Spectral Density Measurements

MIMO Antenna-1 Power Spectral Density Measurements

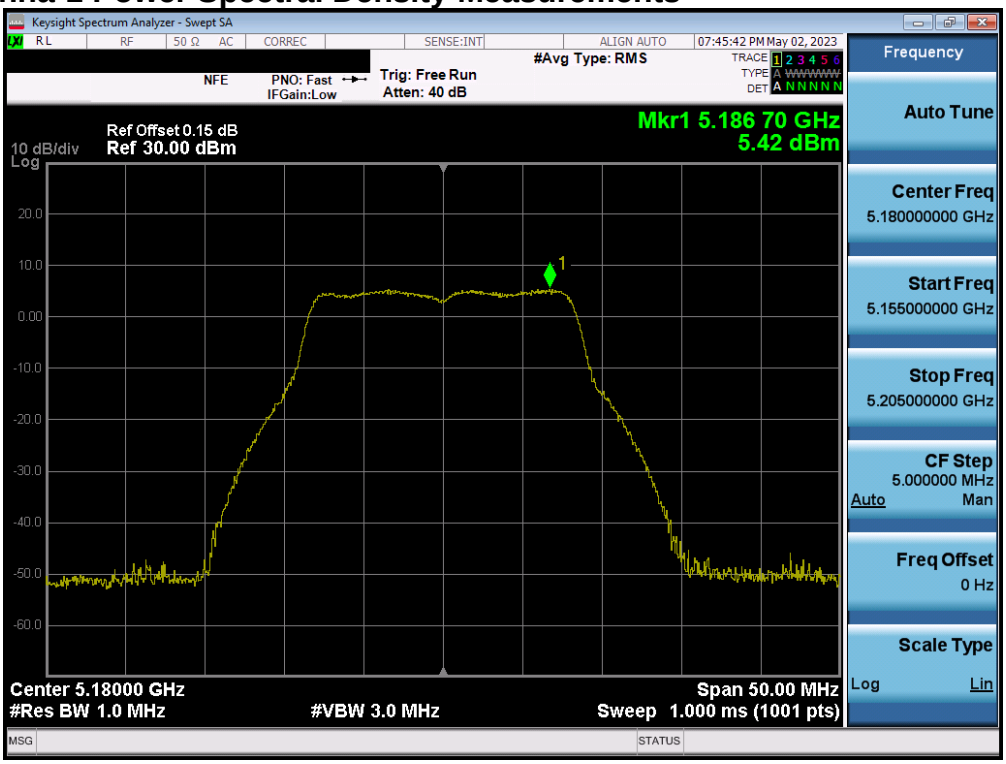

Plot 7-175. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 36)

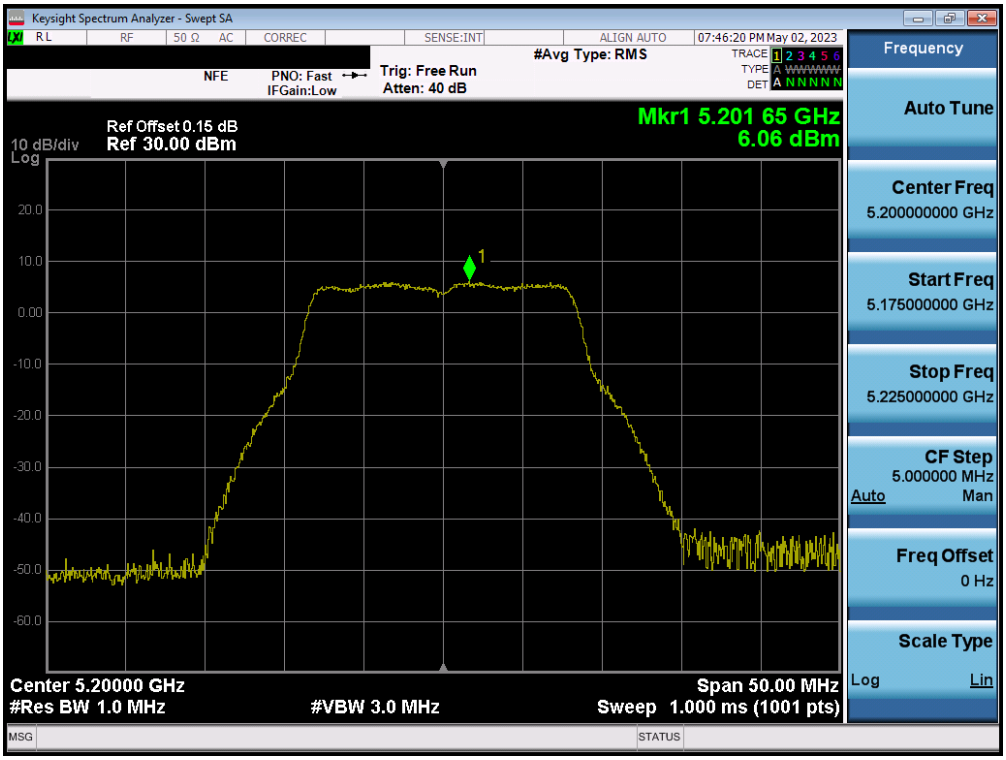

Plot 7-176. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 40)

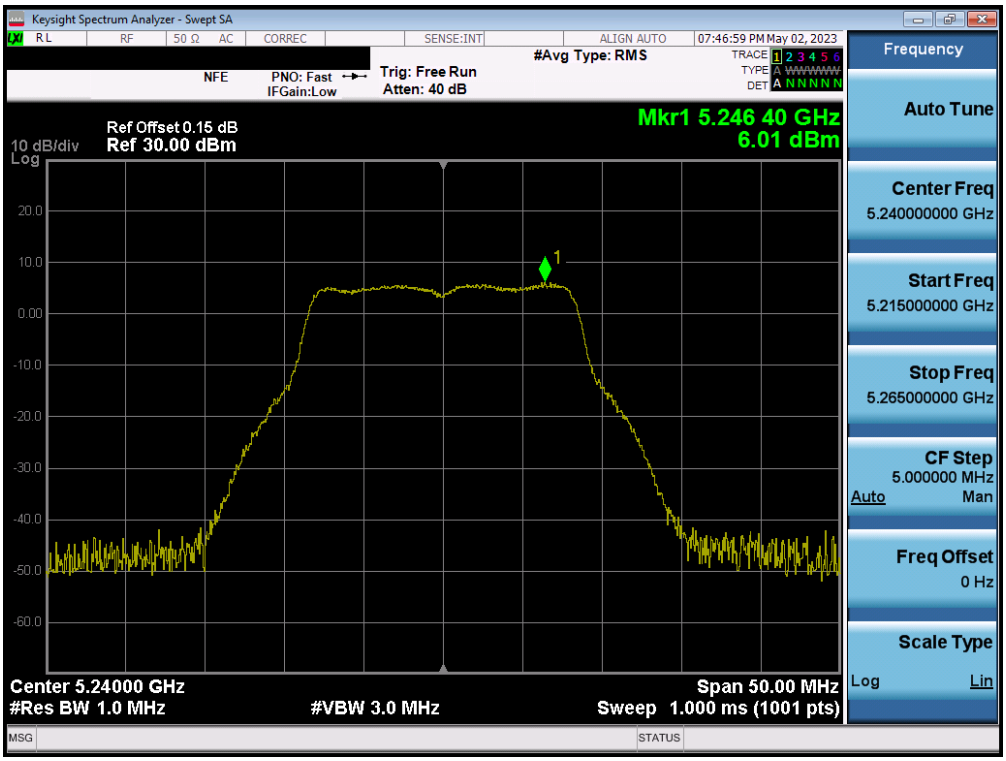

Plot 7-177. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 48)

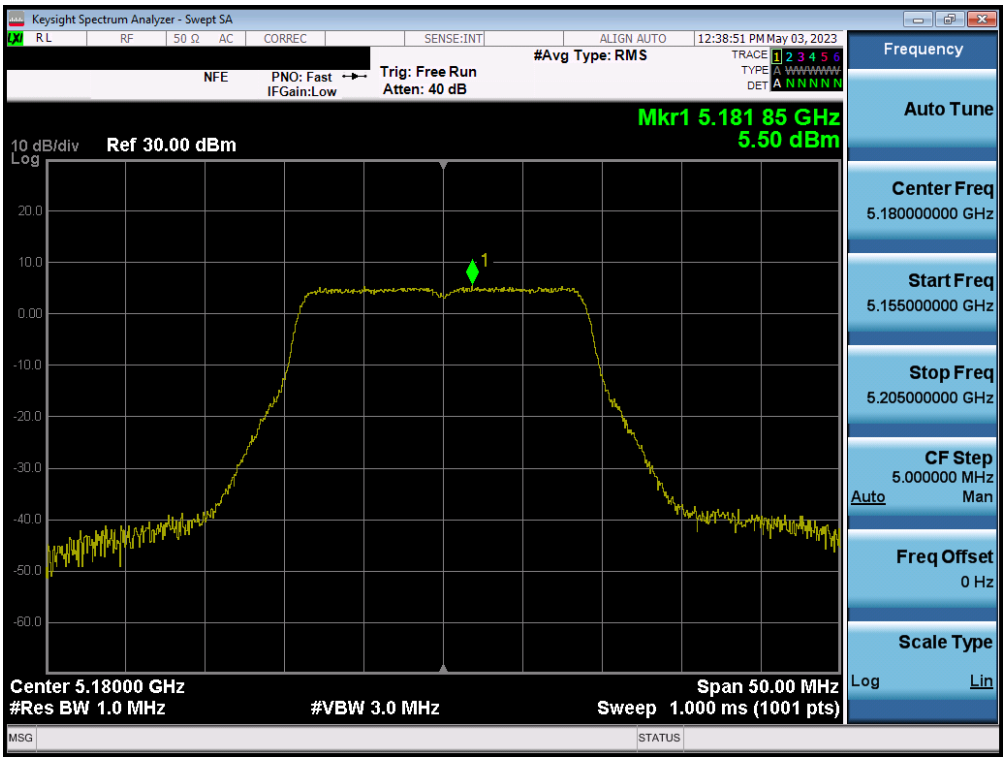

Plot 7-178. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

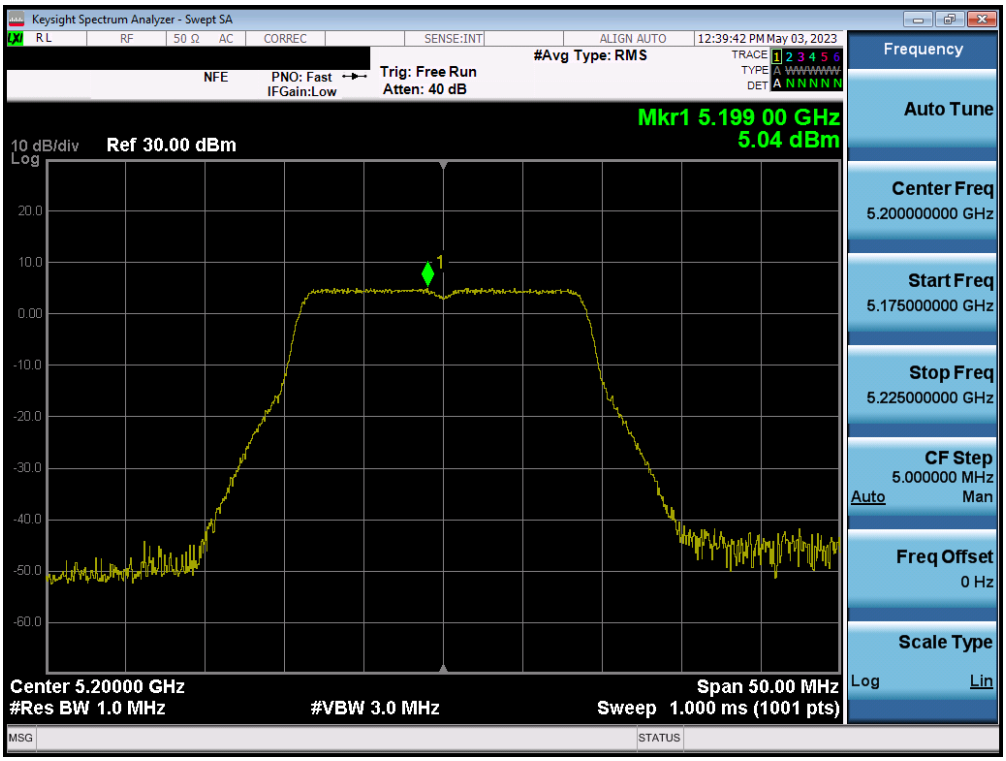

Plot 7-179. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

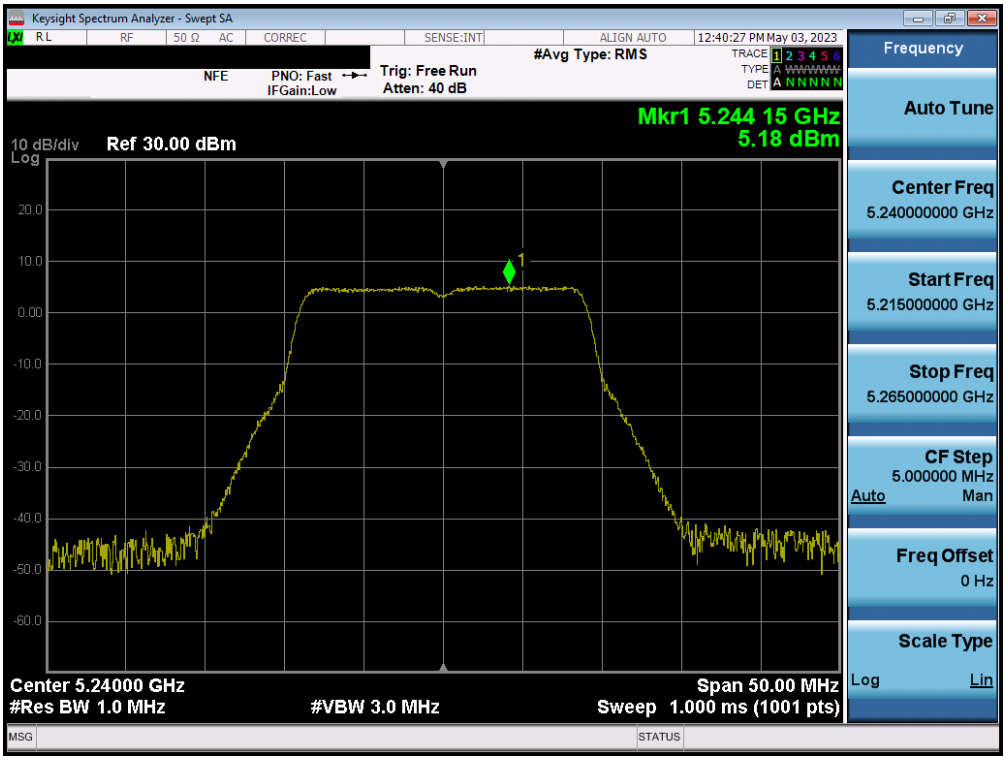

Plot 7-180. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

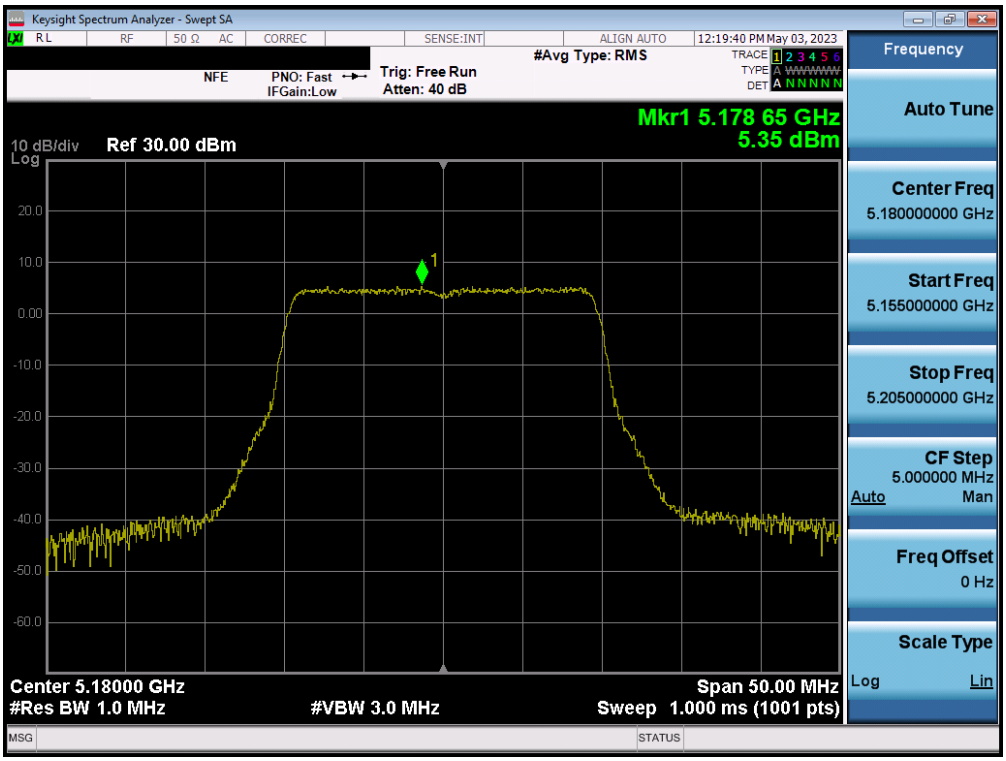

Plot 7-181. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

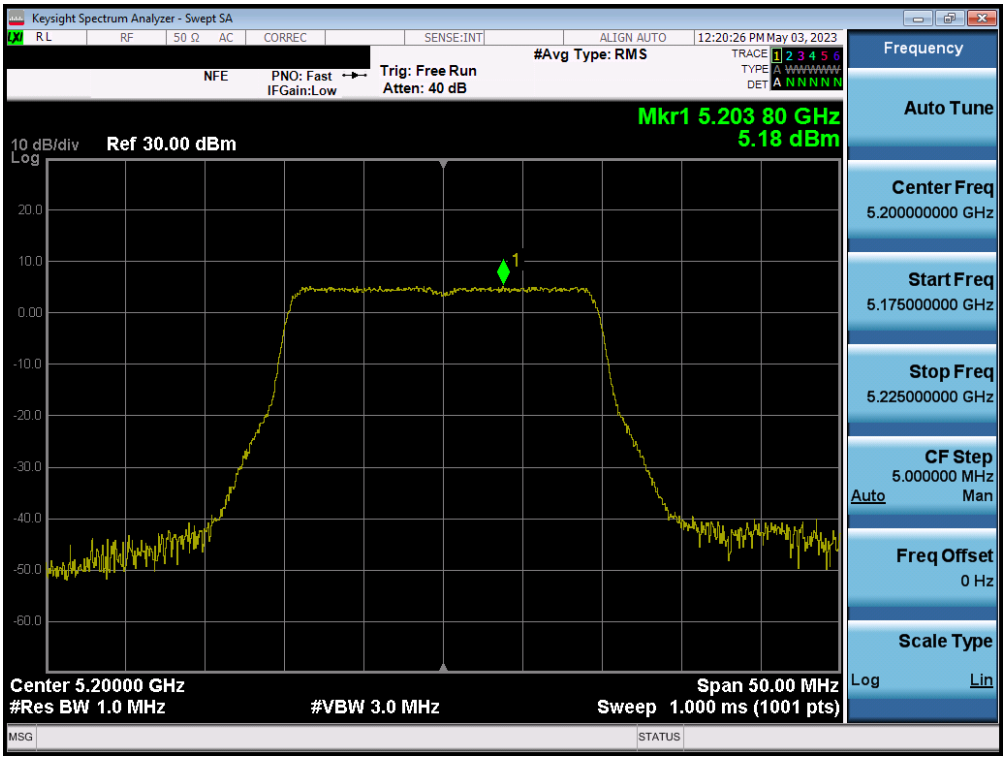

Plot 7-182. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

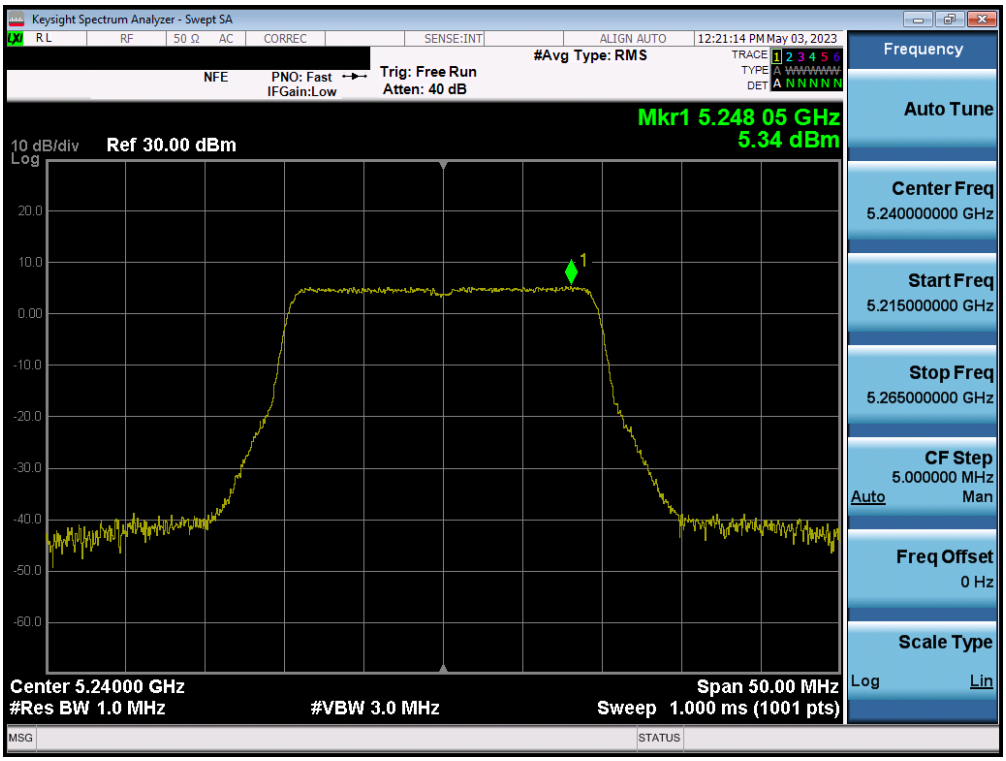

Plot 7-183. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

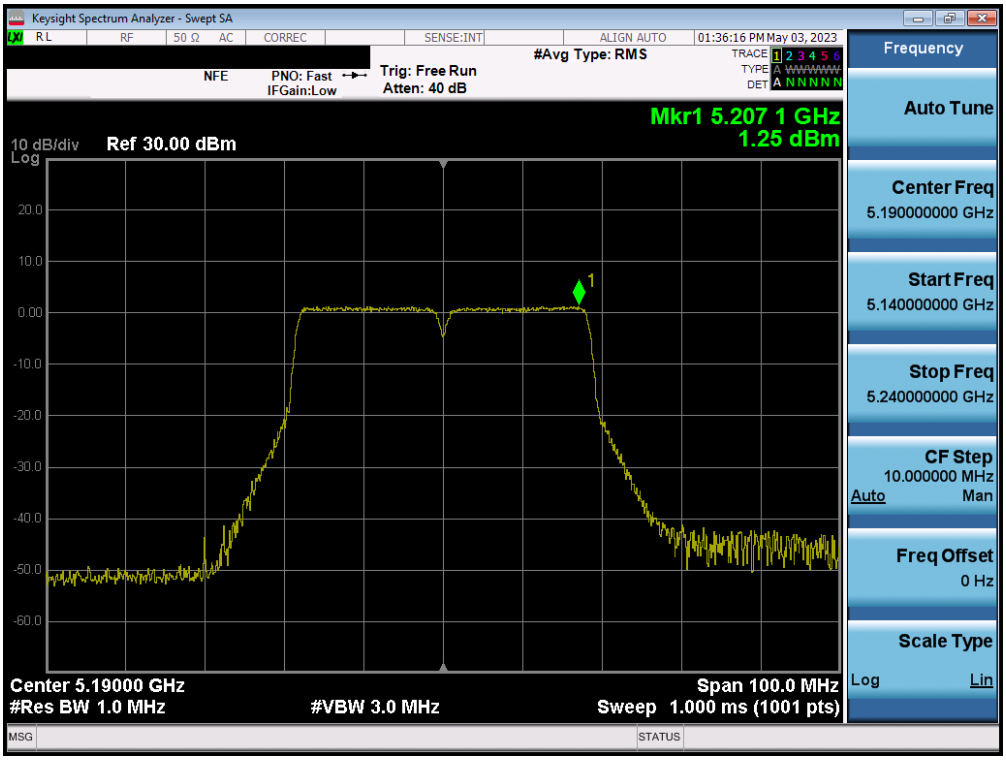

Plot 7-184. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

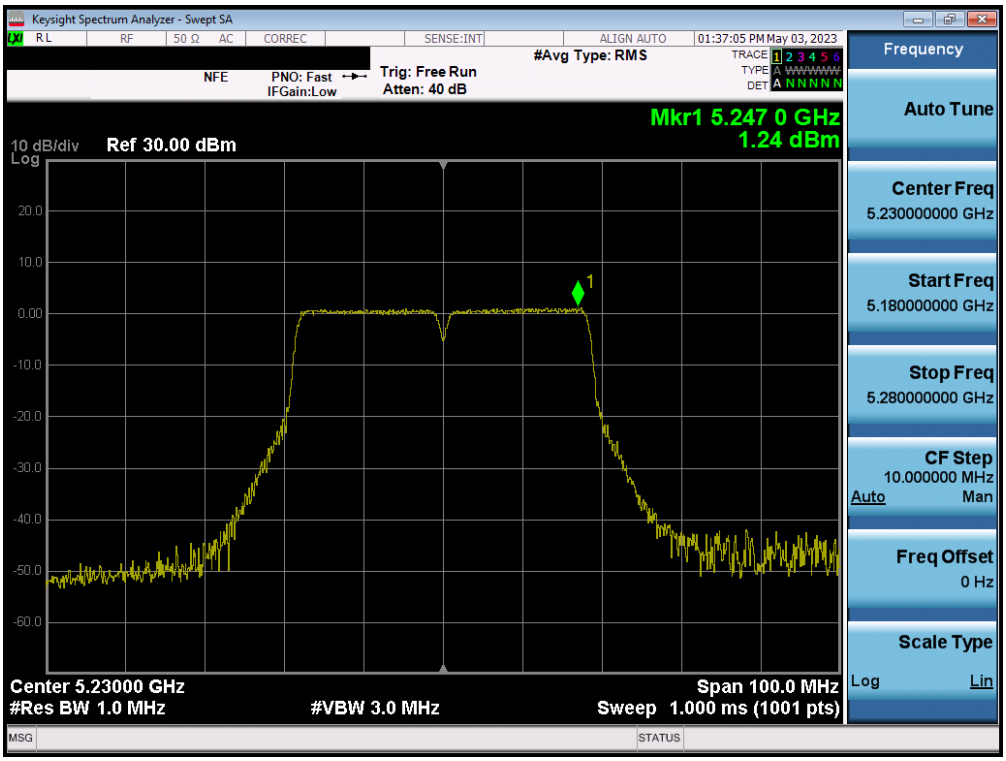

Plot 7-185. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

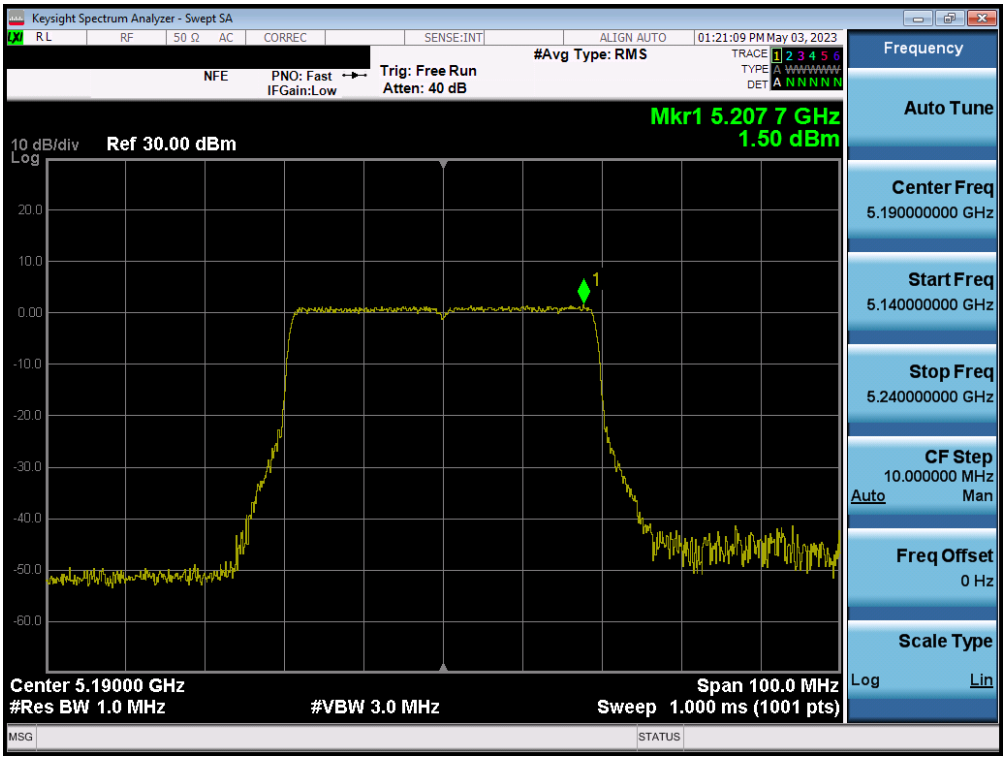

Plot 7-186. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

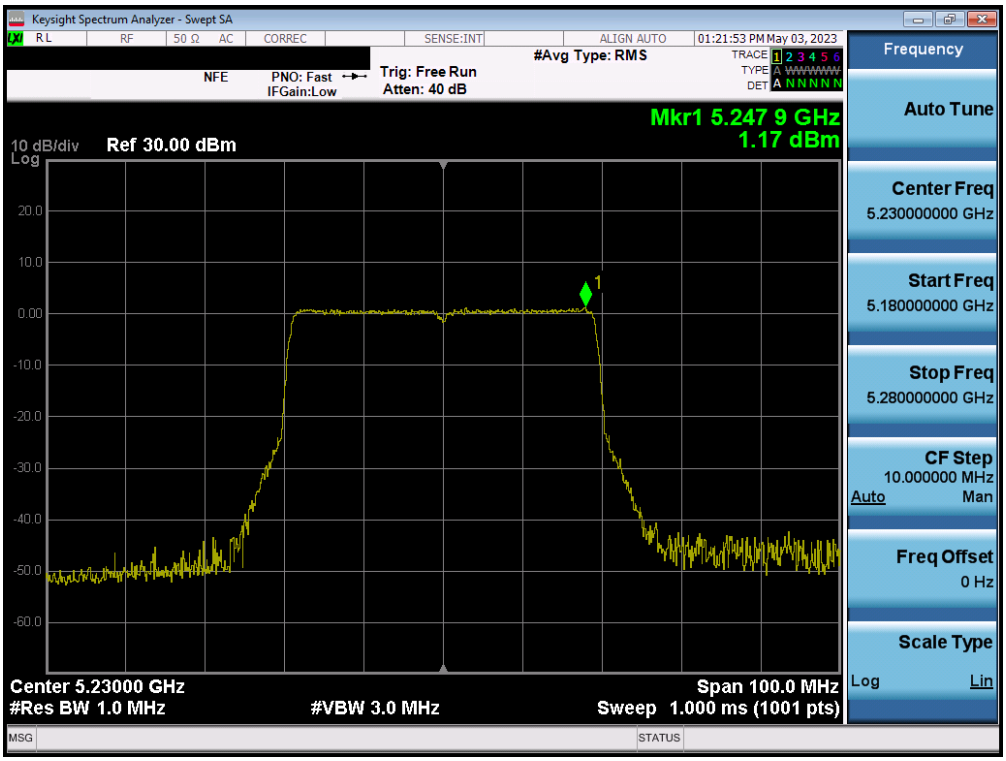

Plot 7-187. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

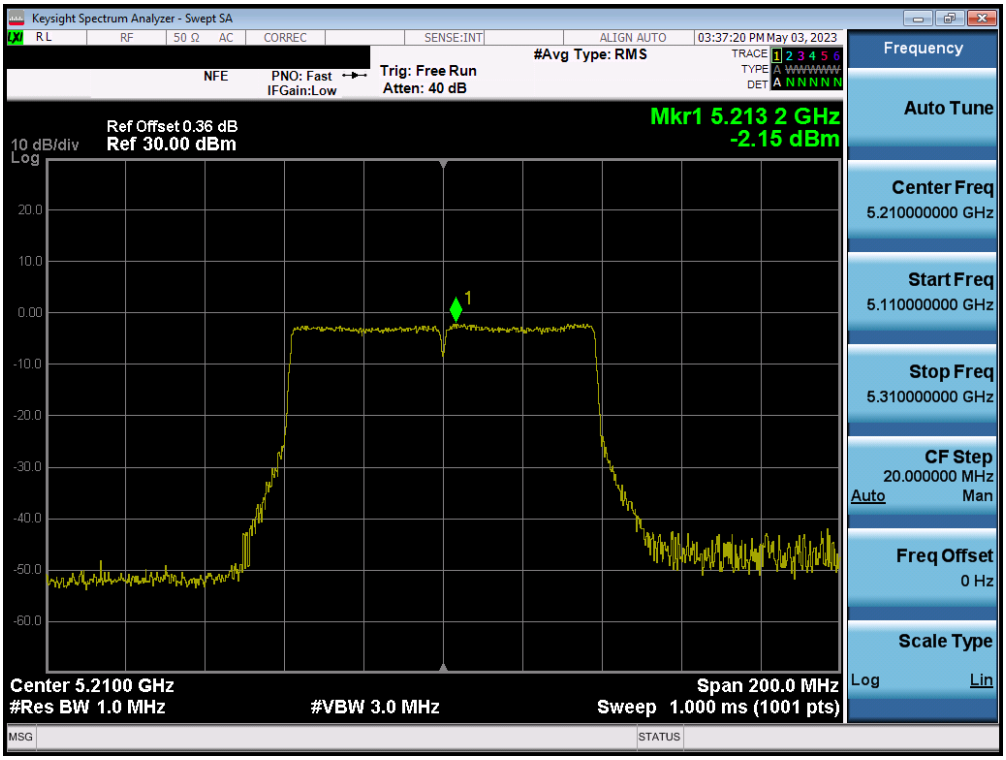

Plot 7-188. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

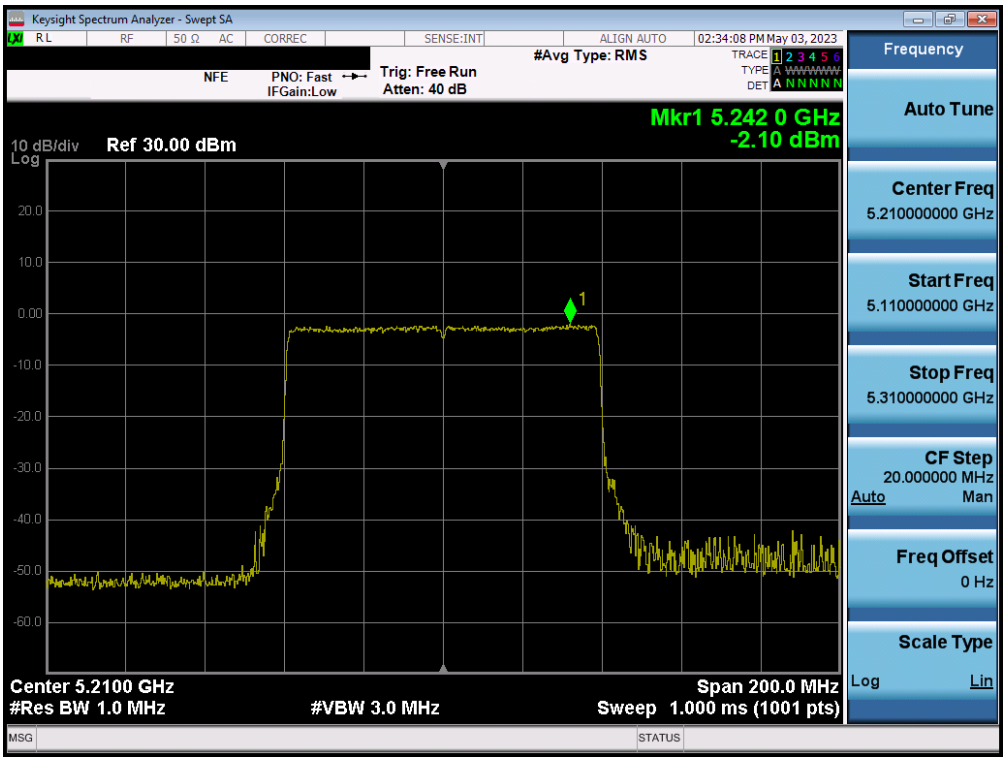

Plot 7-189. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

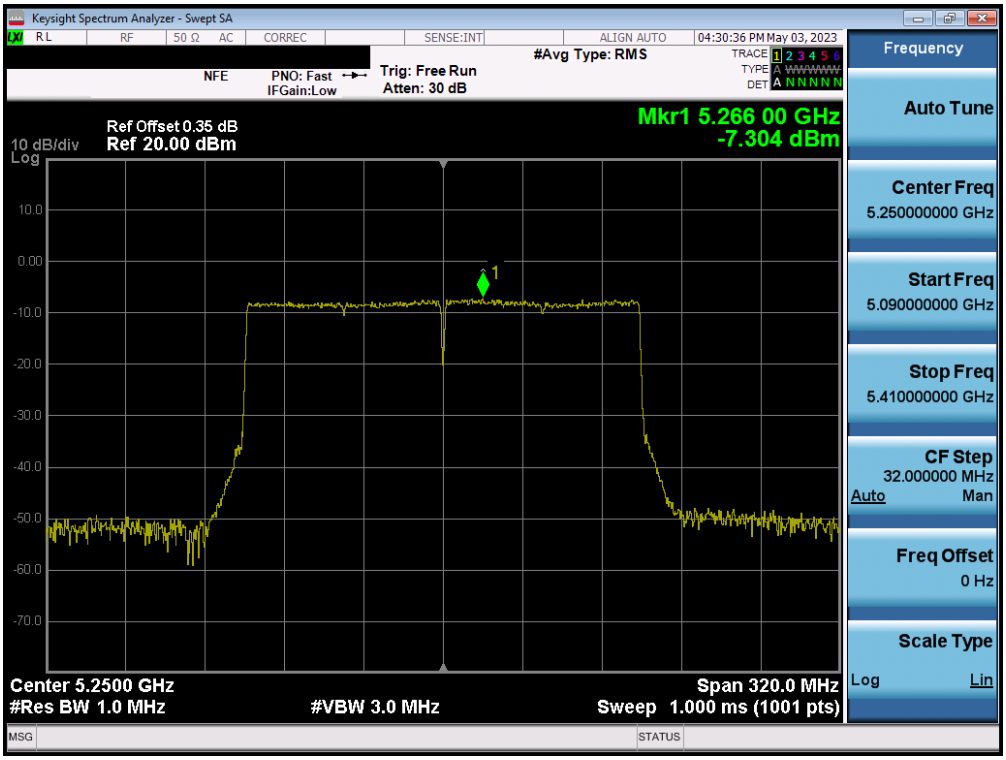

Plot 7-190. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ac (UNII Band ½A) – Ch. 50)

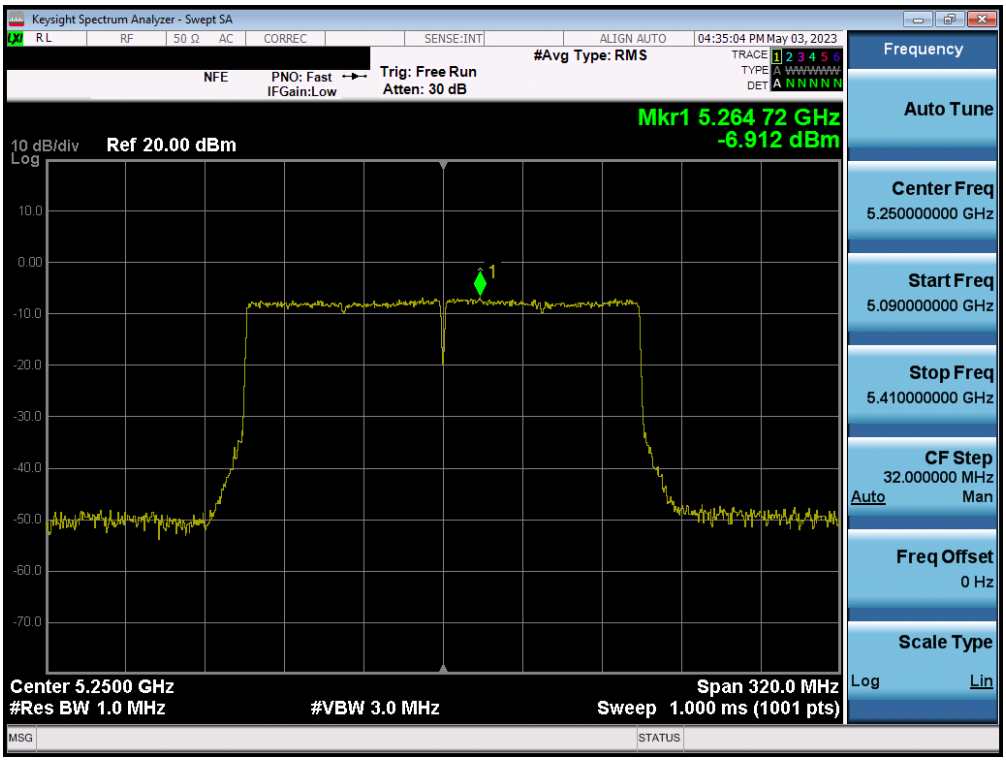

Plot 7-191. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax (UNII Band ½A) – Ch. 50)

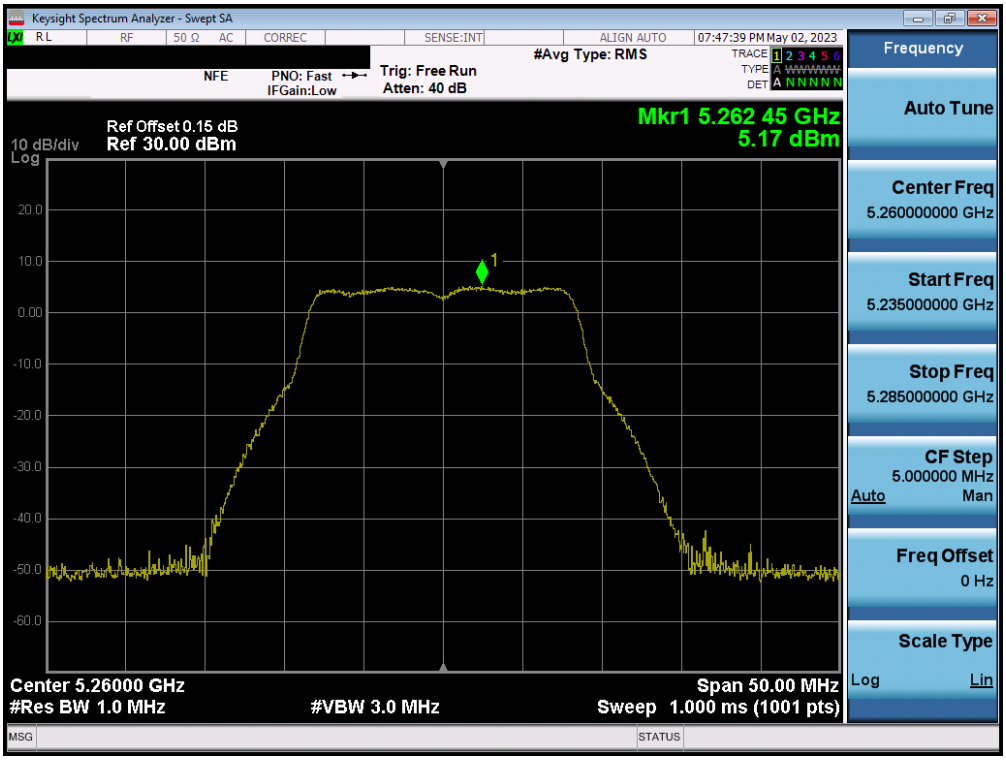

Plot 7-192. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 52)

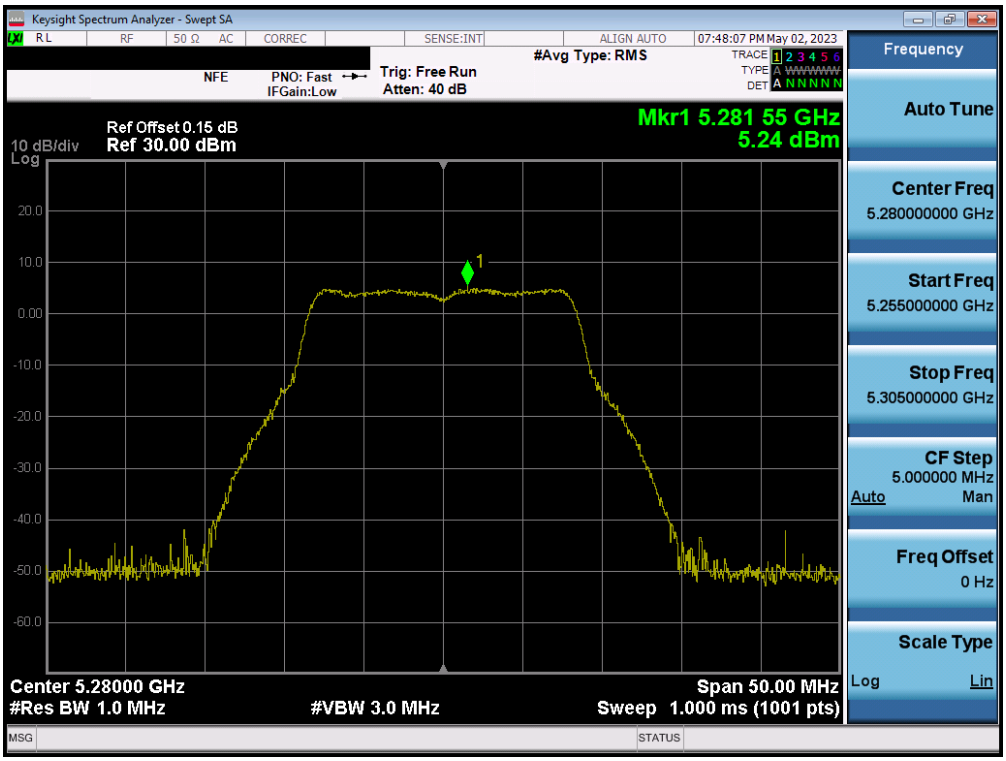

Plot 7-193. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 56)

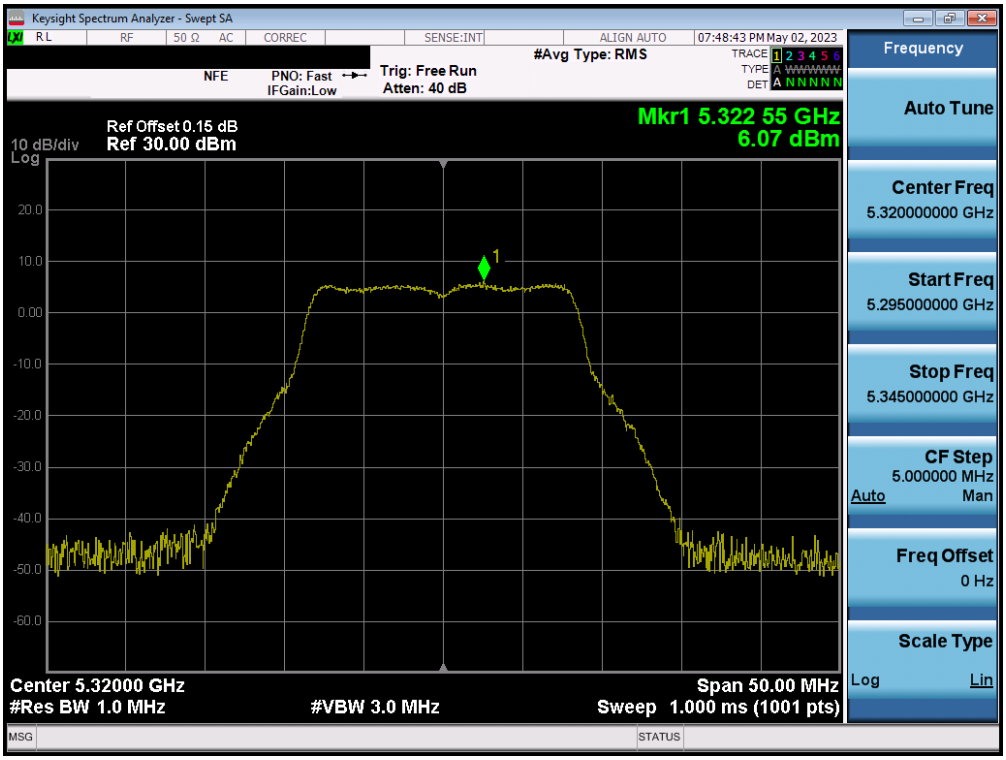

Plot 7-194. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 64)

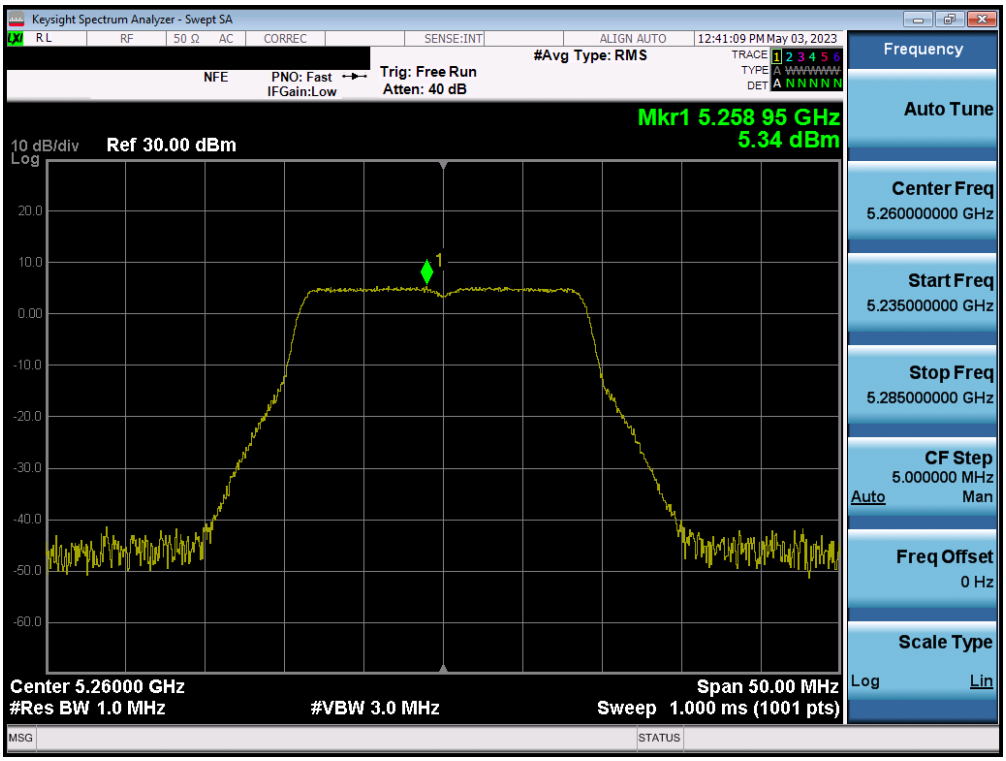

Plot 7-195. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

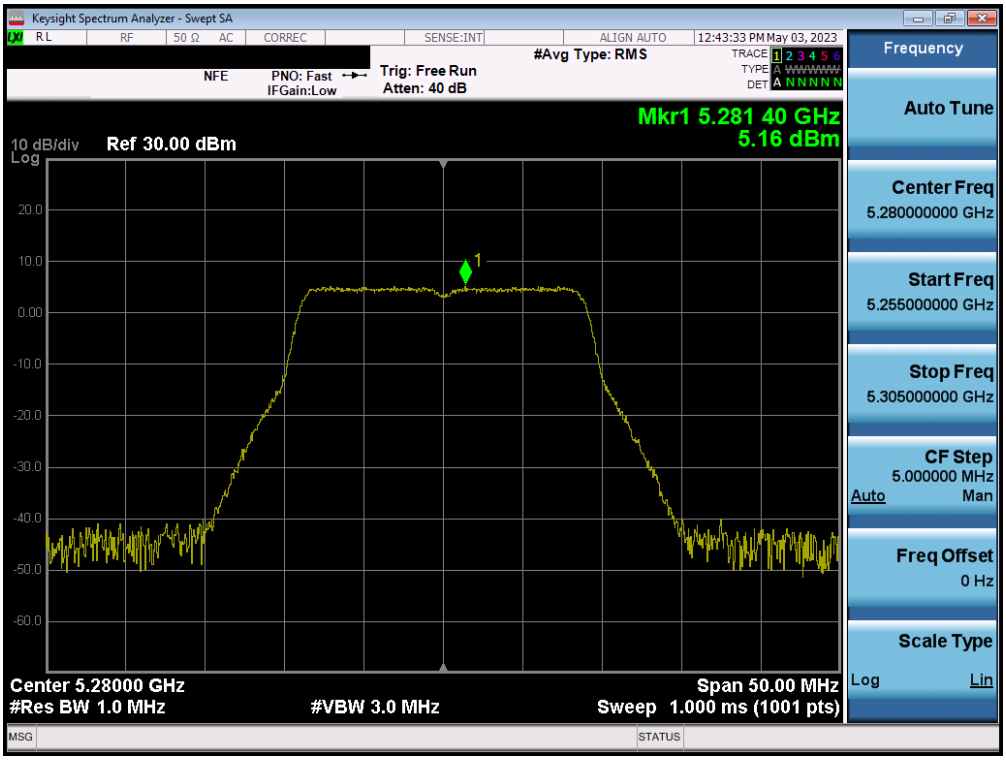

Plot 7-196. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

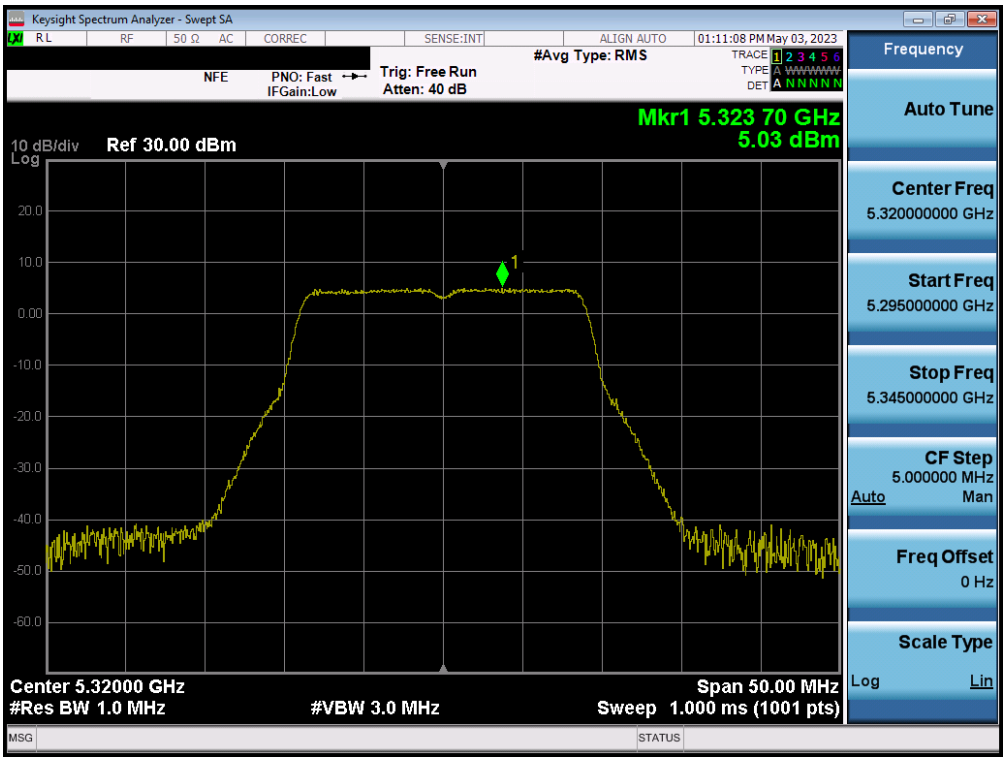

Plot 7-197. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

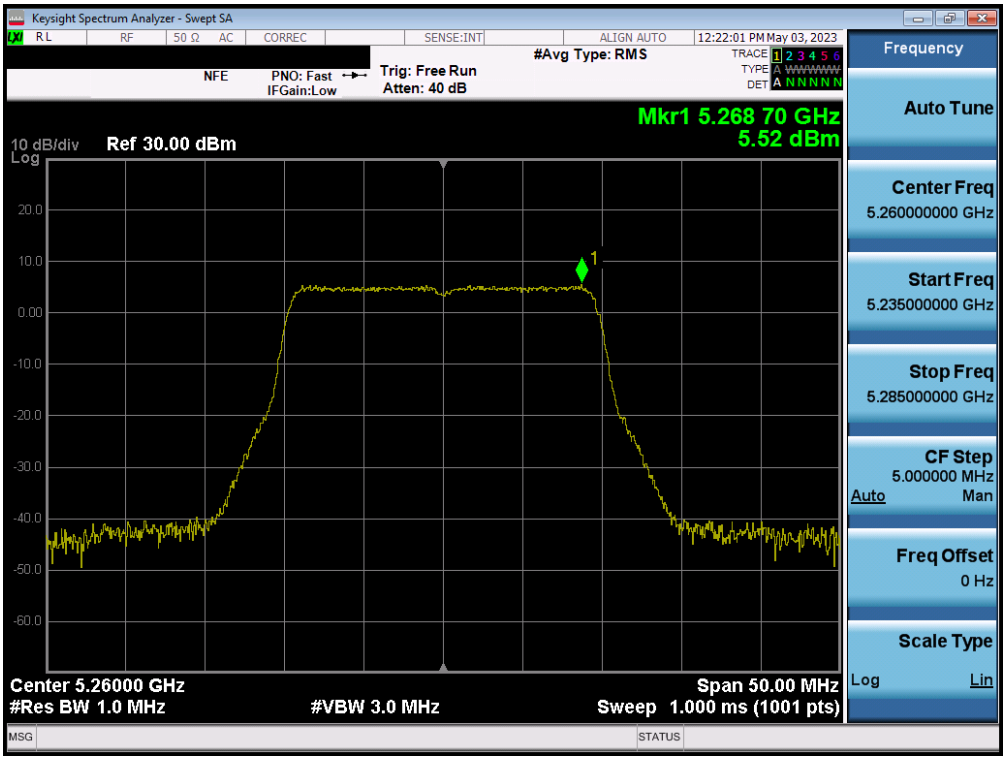

Plot 7-198. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

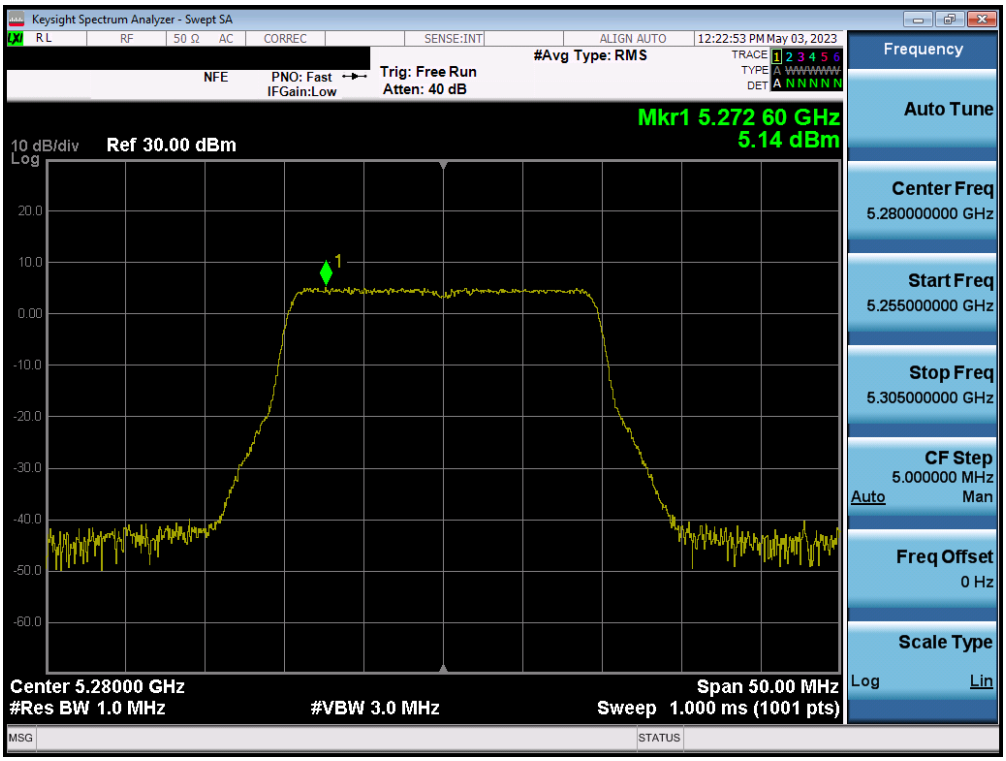

Plot 7-199. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 56)

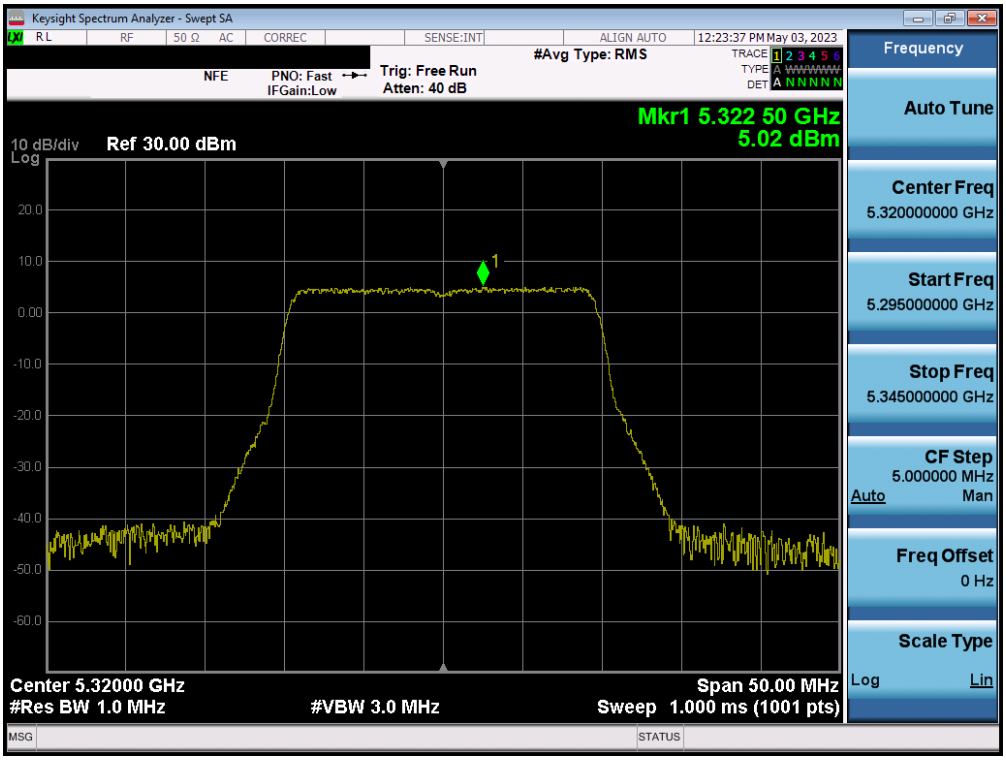

Plot 7-200. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

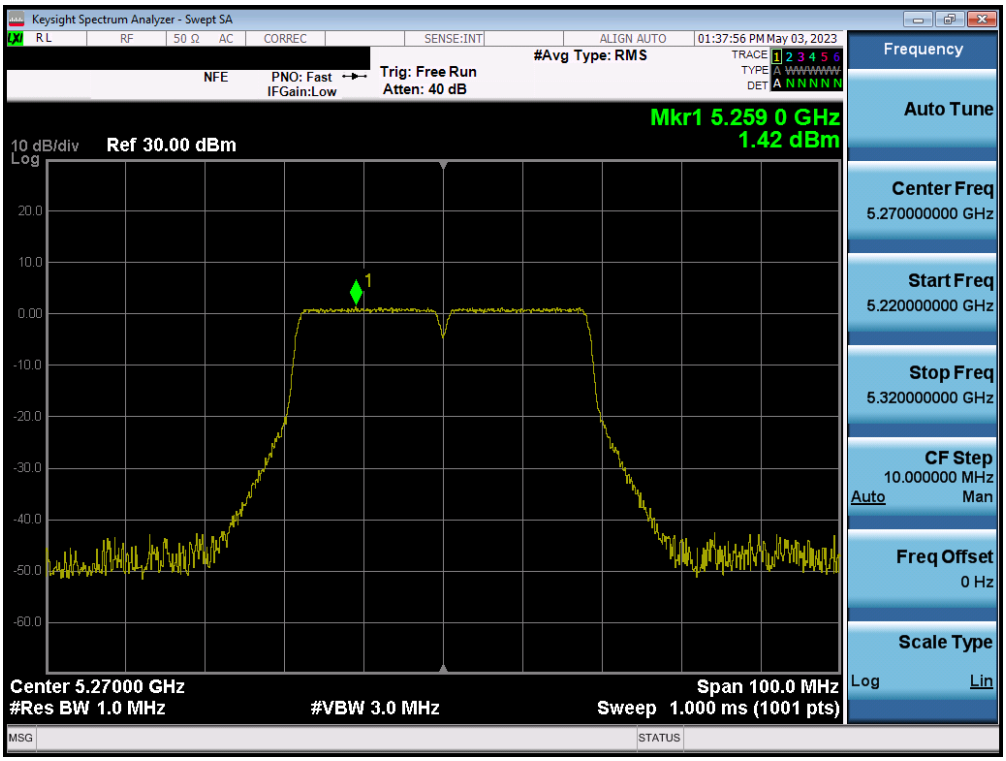

Plot 7-201. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

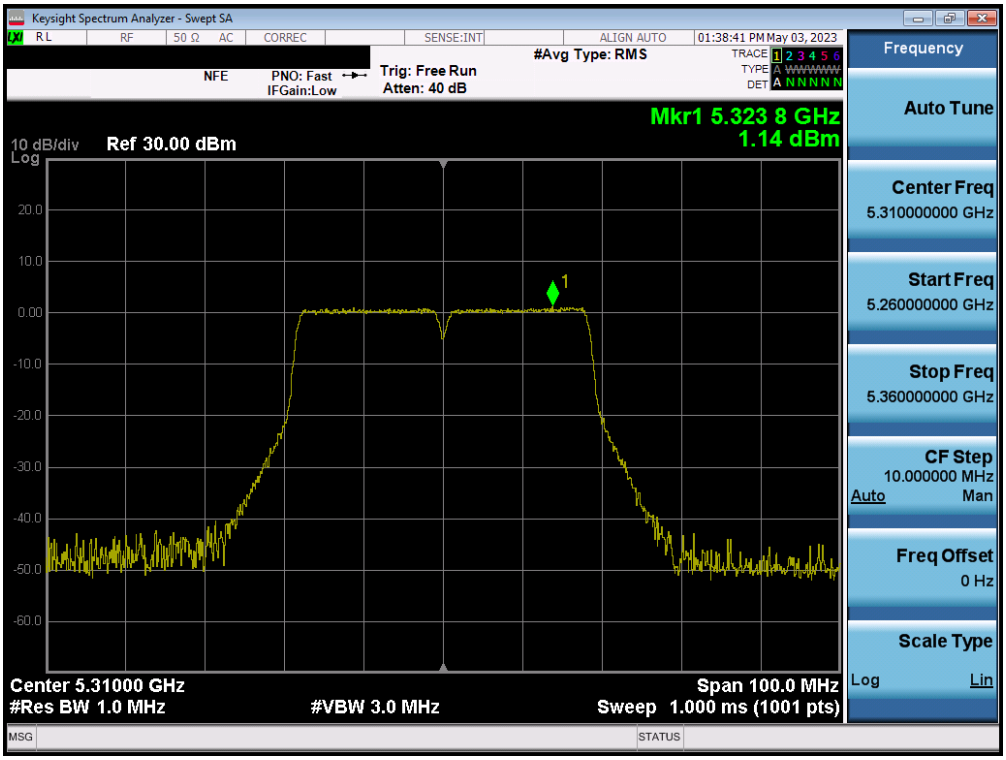

Plot 7-202. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

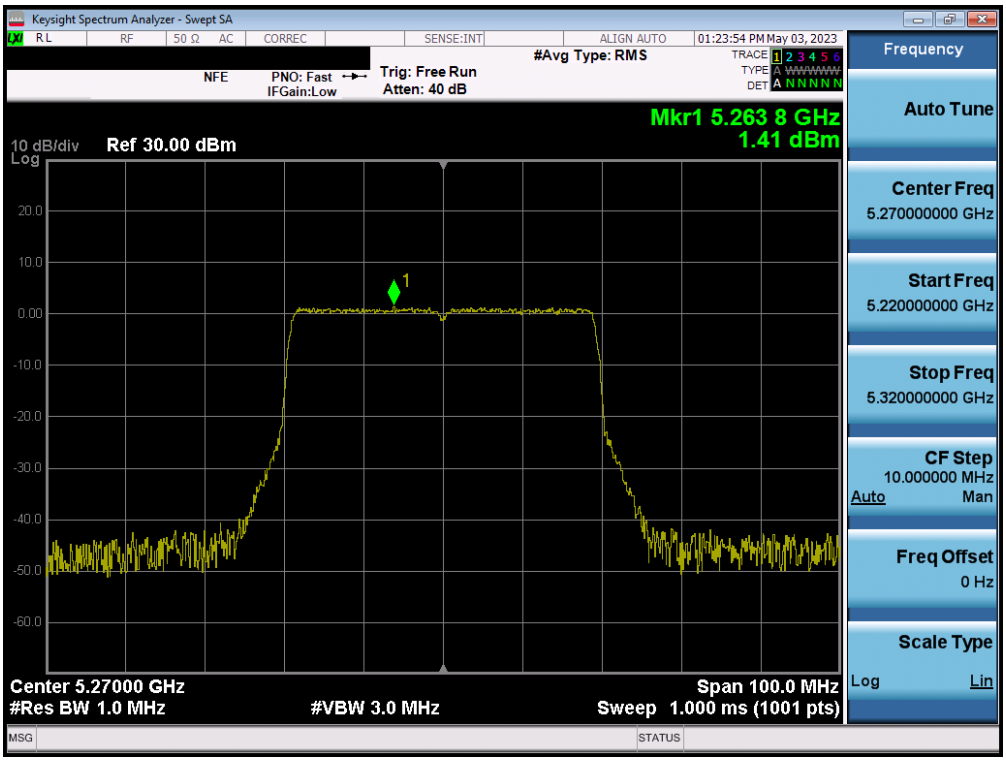

Plot 7-203. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

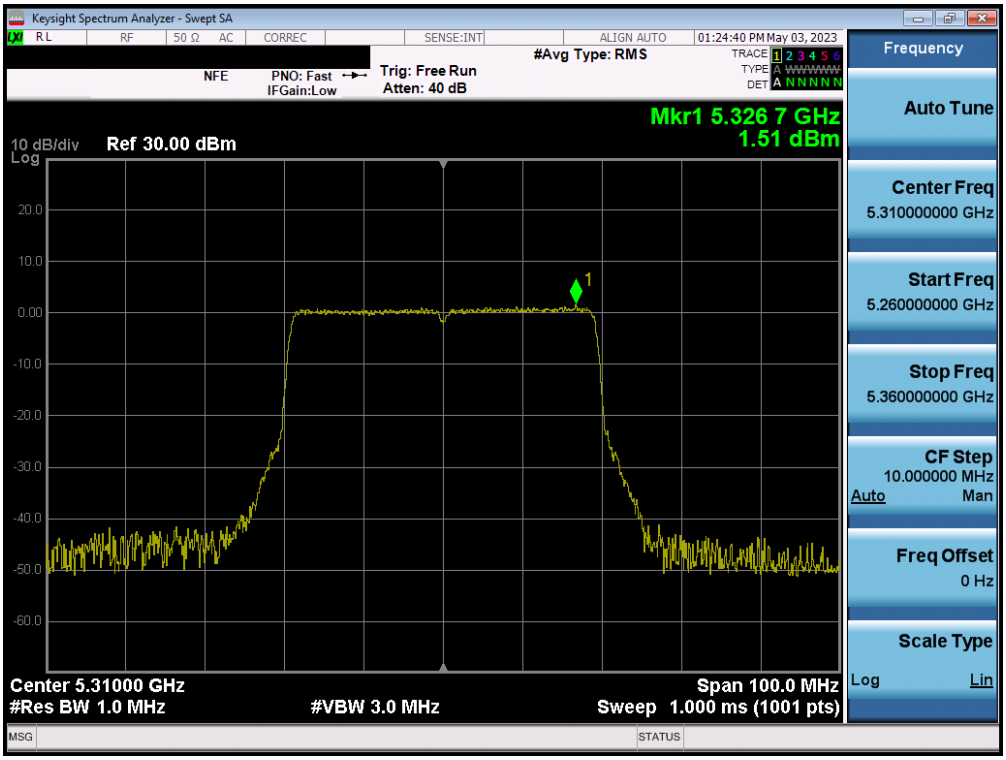

Plot 7-204. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 62)

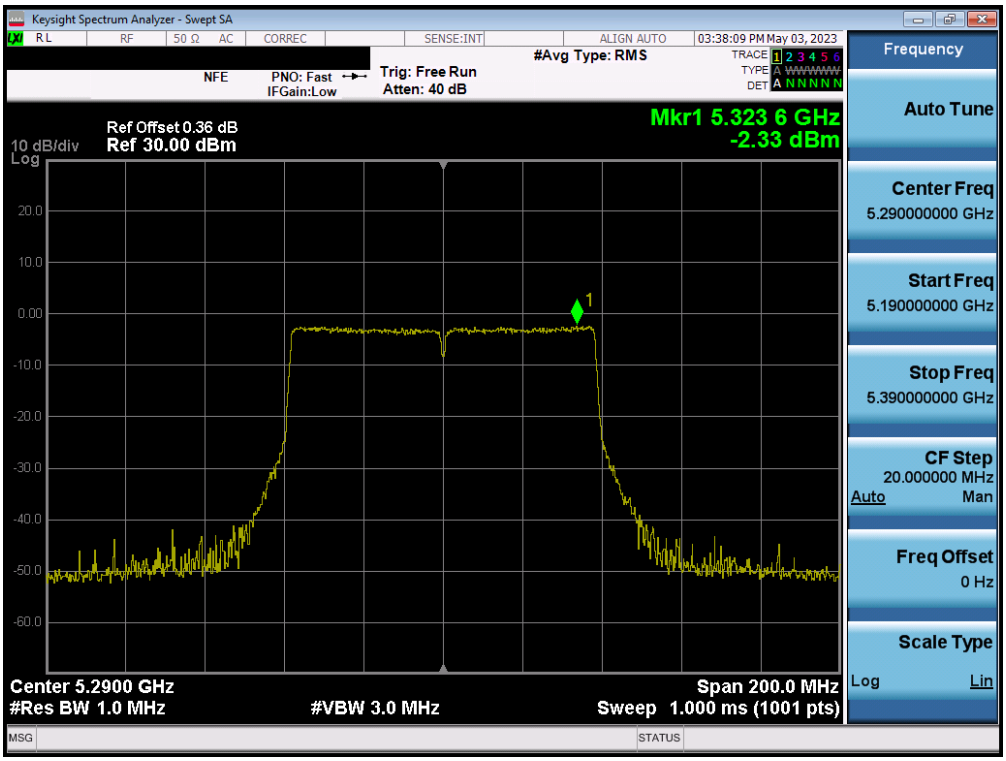

Plot 7-205. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

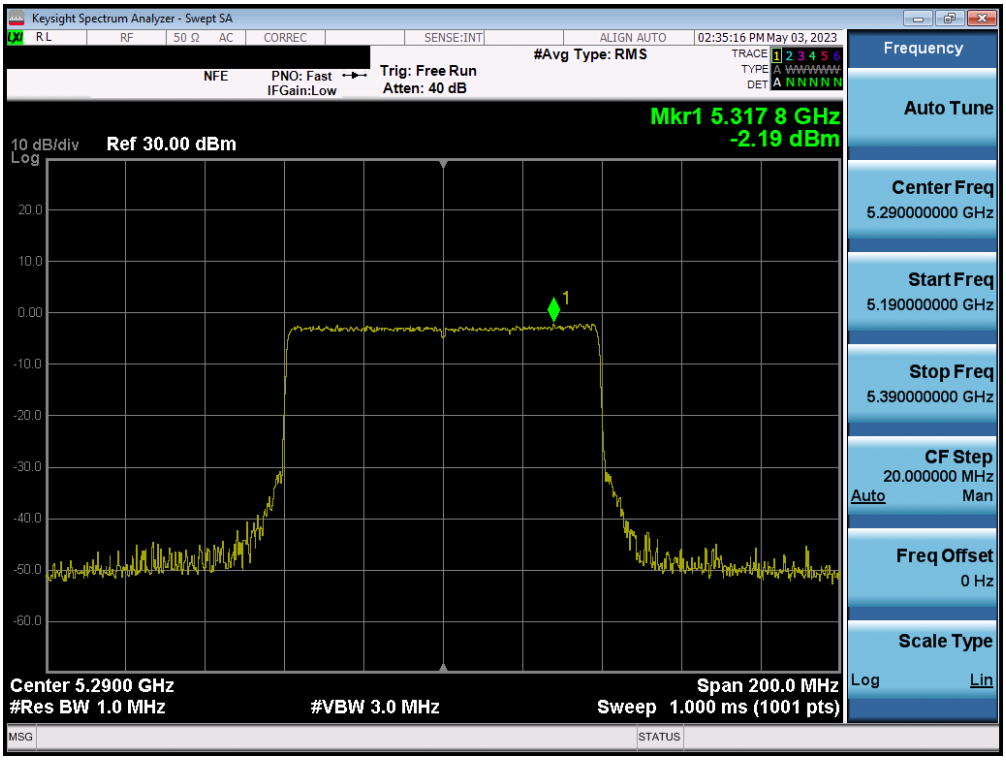

Plot 7-206. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

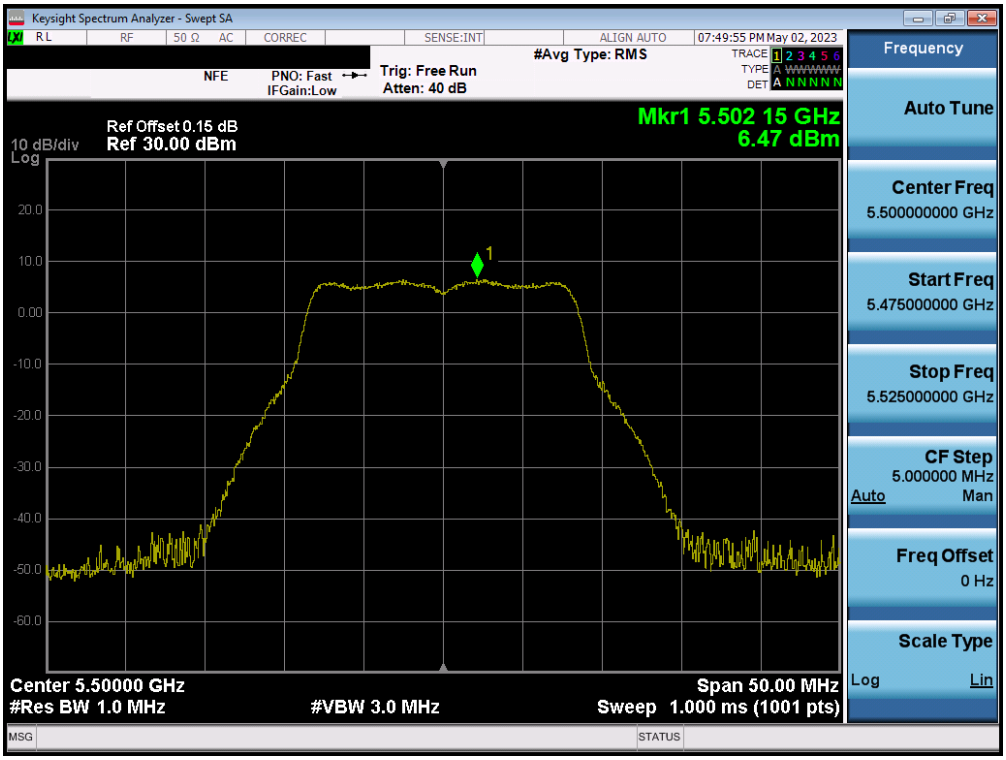

Plot 7-207. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 100)

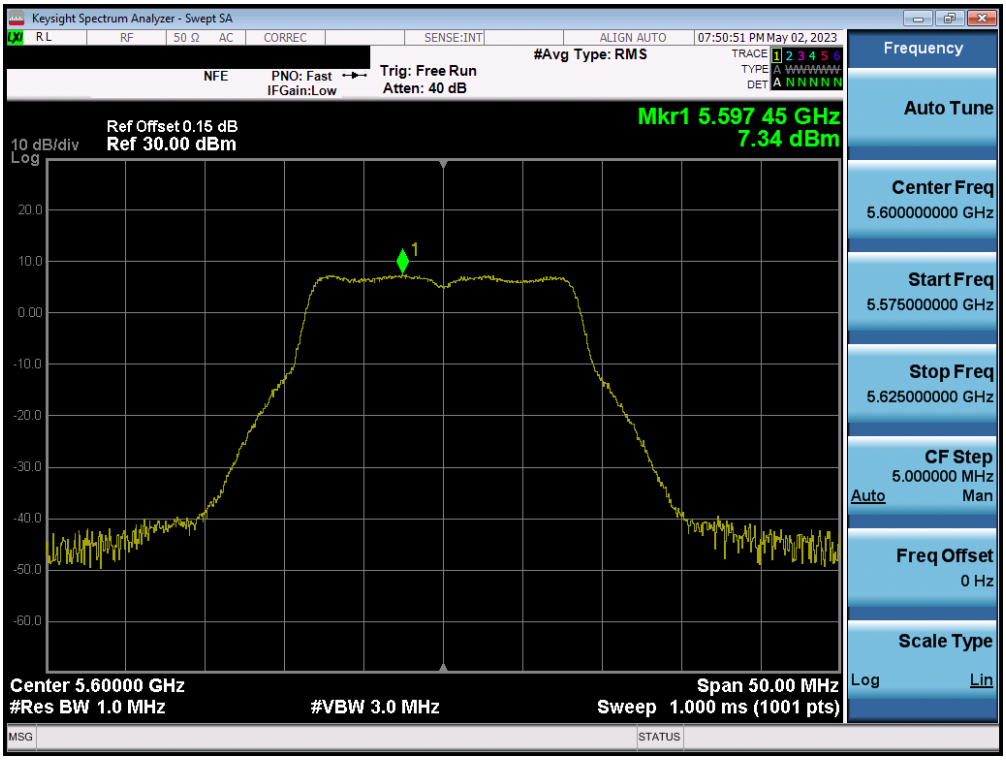

Plot 7-208. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 120)

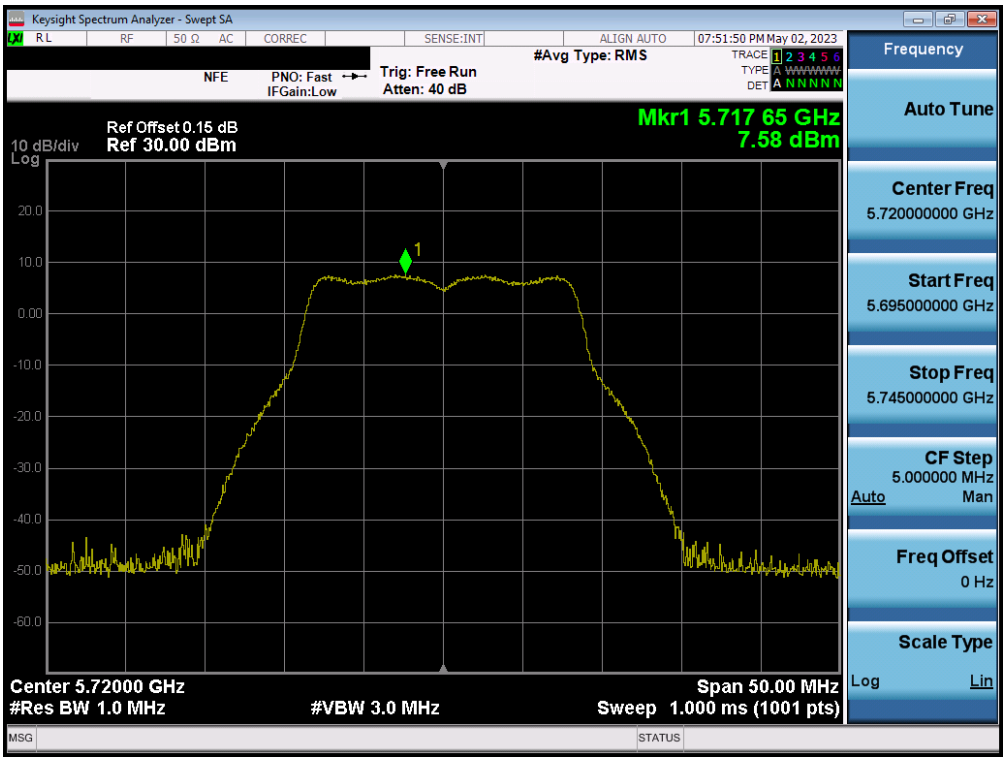

Plot 7-209. Power Spectral Density Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 144)

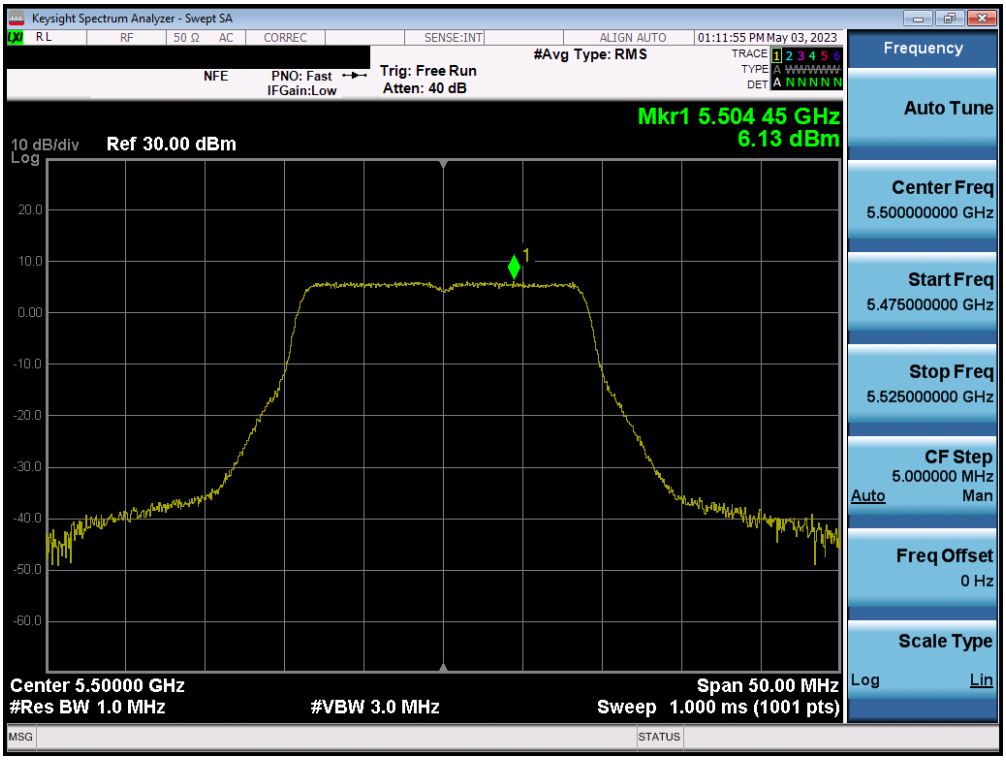

Plot 7-210. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

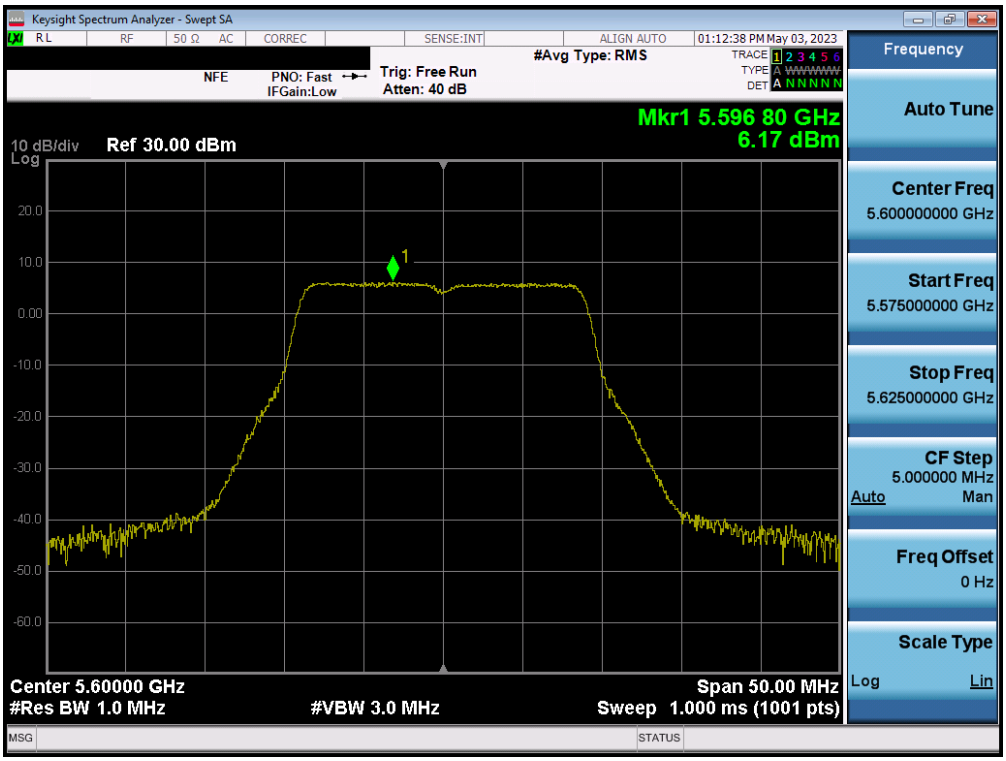

Plot 7-211. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

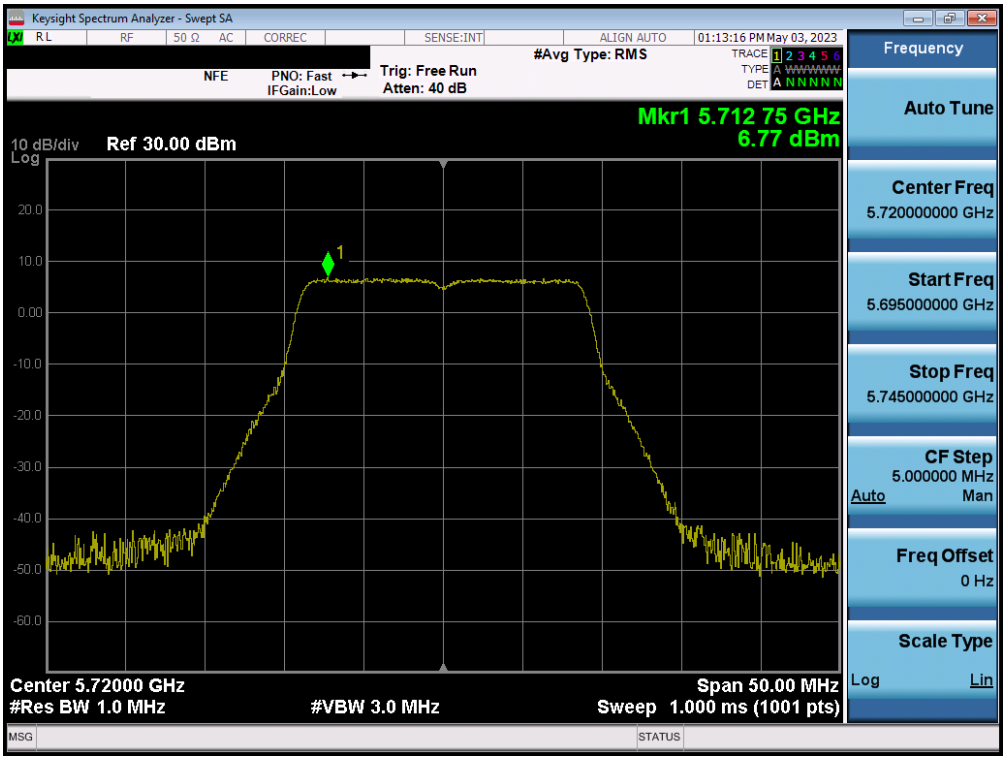

Plot 7-212. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

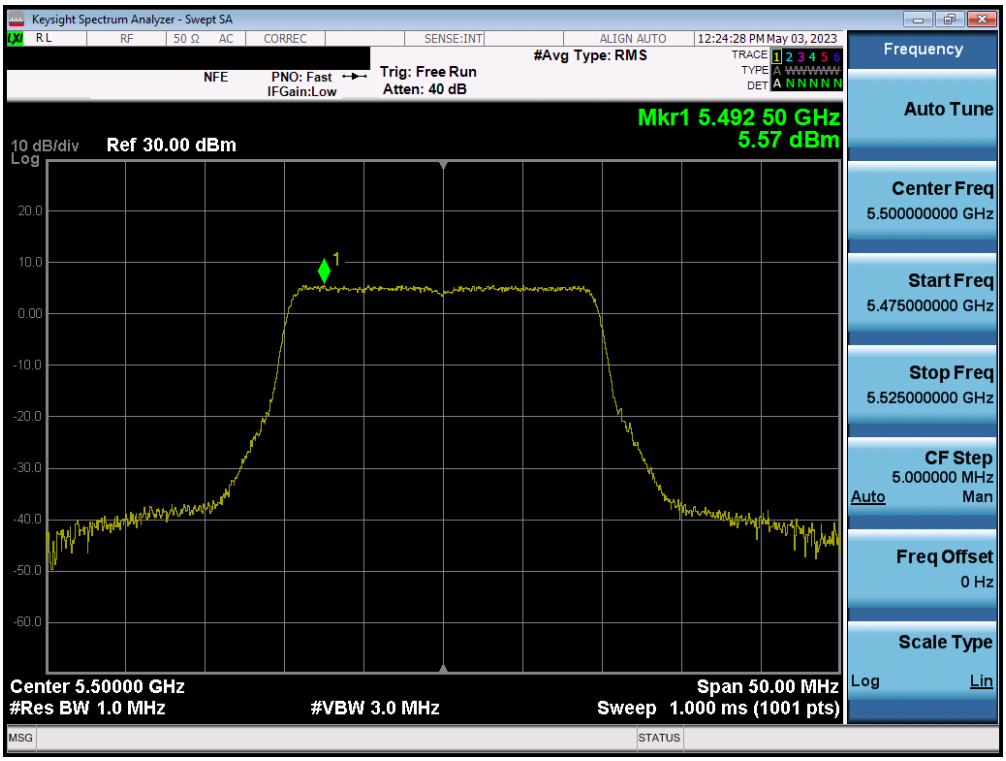

Plot 7-213. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)

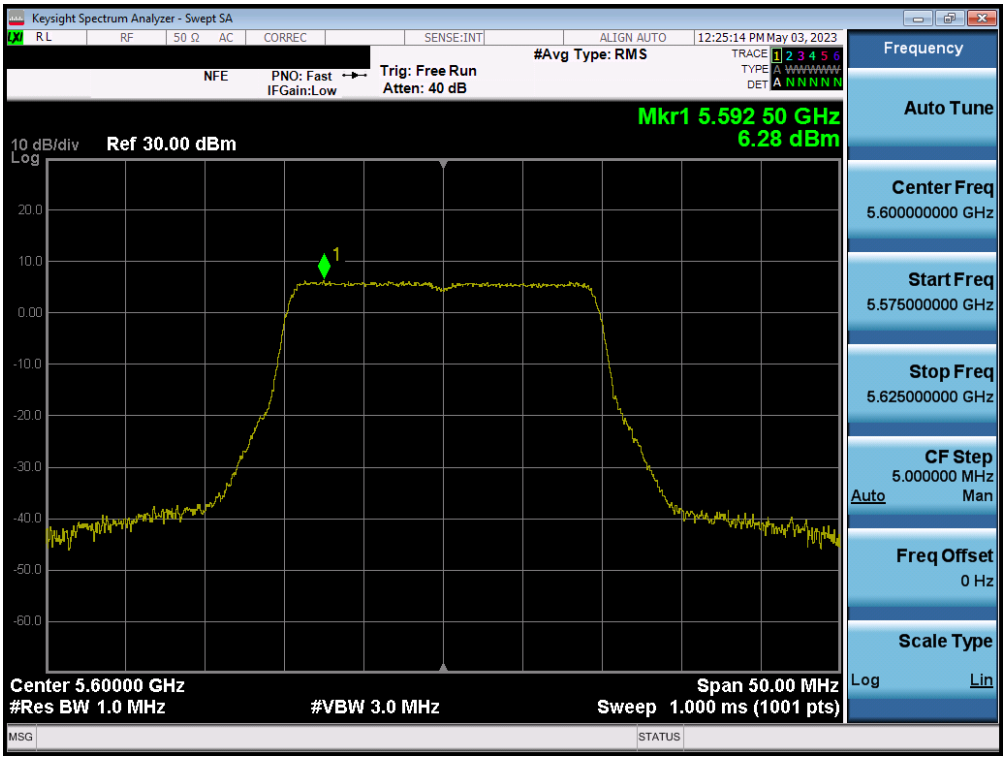

Plot 7-214. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)