



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **M2710**
FCC ID(Requested) : **A3LSWDM2710**
Report No : **FG-033-R1**
Job No : **FG-033**
Date issued : **March 12, 2009**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS.....	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA	14
6.1. Effective Radiated Power (E.R.P.).....	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability.....	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph.....	21
6.7.3. GSM1900 Frequency Stability Table	23
6.7.4. GSM1900 Frequency Stability Graph.....	24
7. CONCLUSION.....	26
8. TEST PLOTS.....	27

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSWDM2710
- Model : M2710
- Additioinal Model : GT-M2710C
- Quantity : Quantity production is planned
- Emission Designators : 246KGXW(GSM850)
249KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.695 W ERP GSM850 (28.42 dBm)
0.805 W EIRP GSM1900 (29.06 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM Phone with EDGE Rx only and Bluetooth.
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : February 25-26, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-033-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

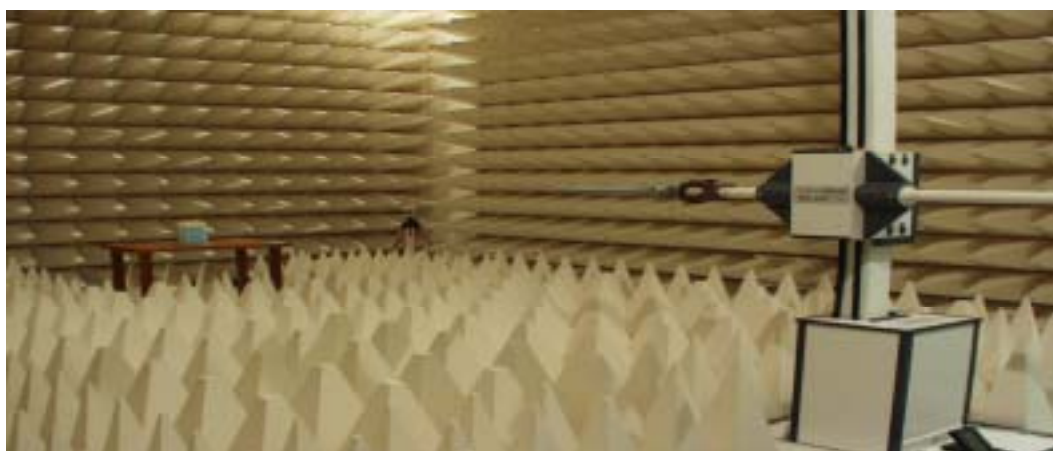


Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2009-04-15
Signal Generator	SMR20	835197/030	2009-12-05
Network Analyzer	8753E	JP38160590	2009-06-20
Power Sensor	E9300H	MY41495838	2009-09-12
	8481B	3318A10325	2009-09-28
Power Meter	E4417A	MY45101042	2009-09-12
	E4419B	GB41293846	2009-09-12
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
	3121C-DB4	9007-587	2009-04-16
Communication test set	CMU200	109162	2009-10-17
Receive Antenna	HL040	353255/019	2009-10-29
	HL040	353255/020	2010-06-13
Power Supply	E3640A	MY40003594	2009-06-20
	E3640A	MY40003595	2009-05-22
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

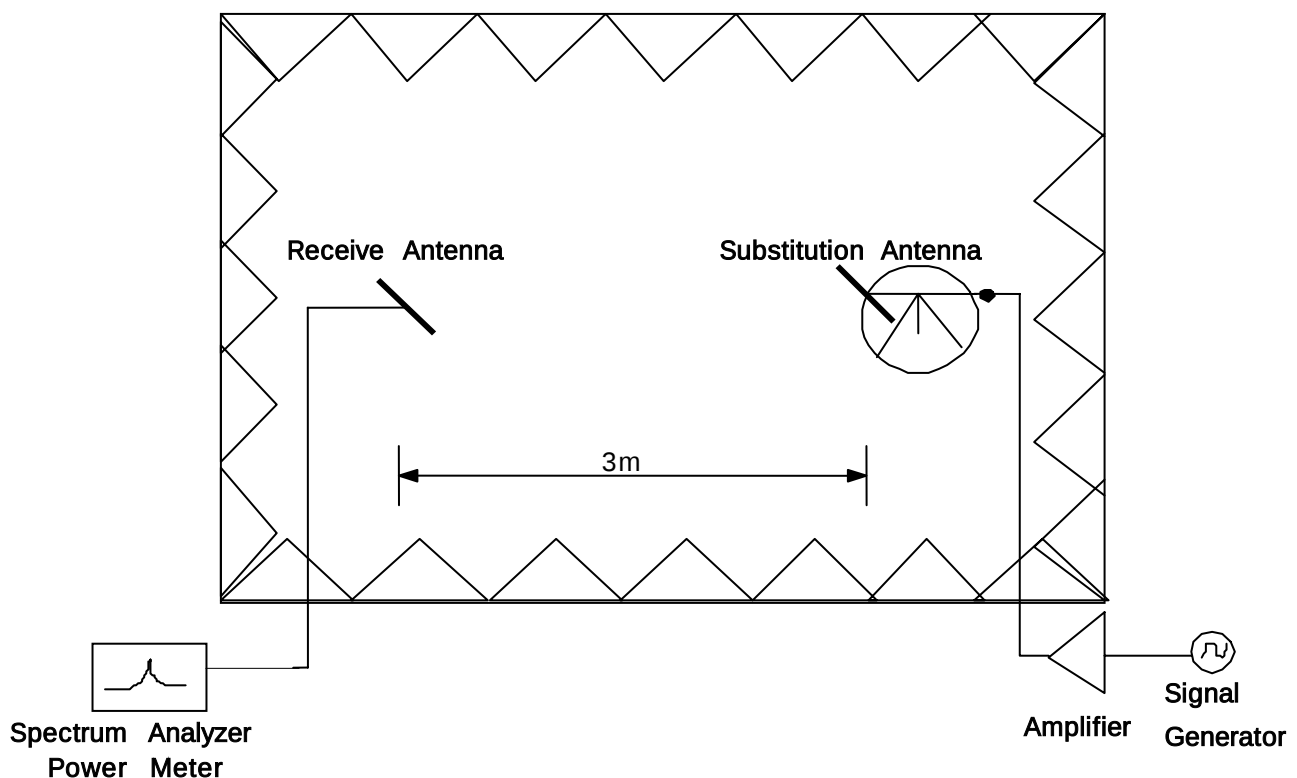


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

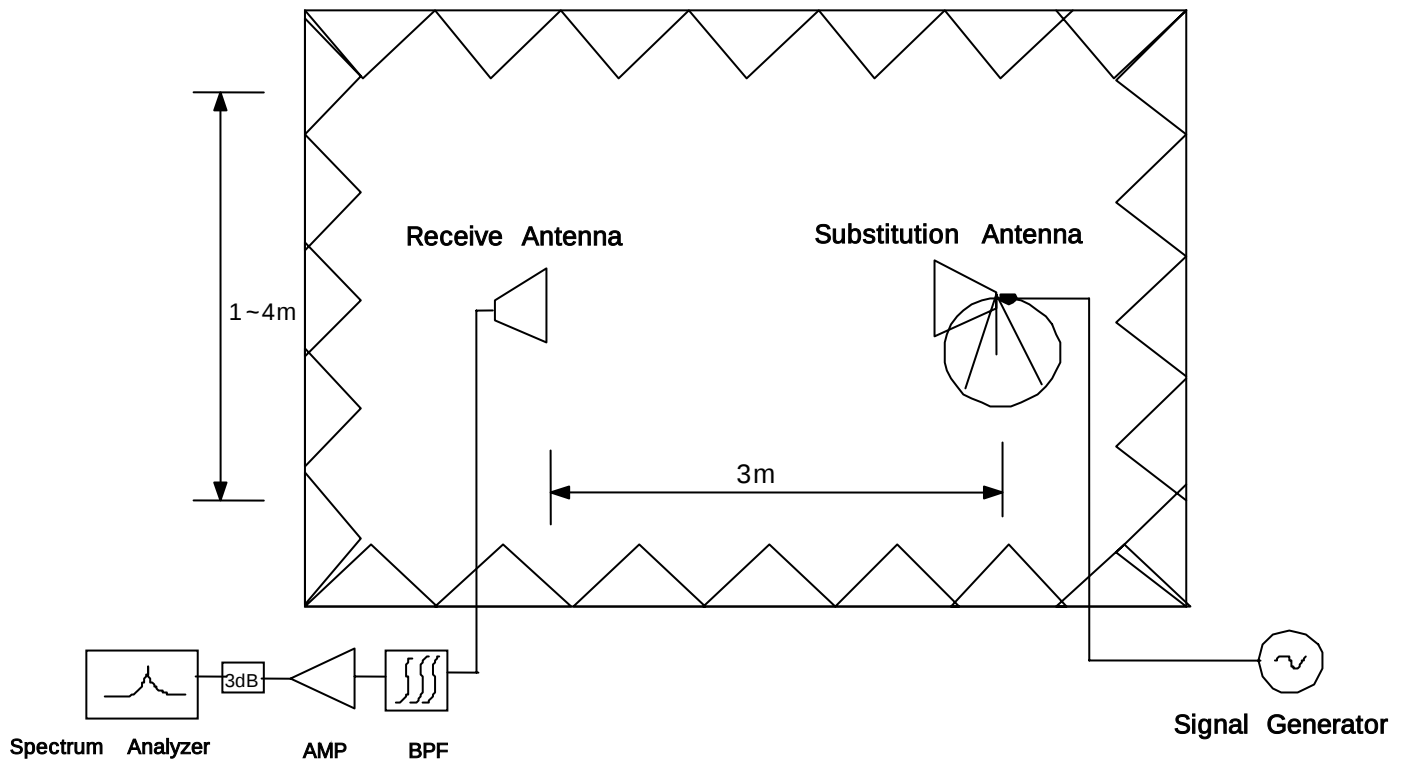


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.695 \text{ W}) = 41.42 \text{ dB}$$

$$28.42 \text{ dBm} - 41.42 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1.Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	25.00	H	-12.24	-0.67	-11.57
		V	-12.44	-0.67	-11.77
836.60	26.00	H	-12.19	-0.73	-11.46
		V	-11.35	-0.73	-10.62
848.80	28.00	H	-12.34	-0.79	-11.55
		V	-10.54	-0.79	-9.75

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-11.68	H	290/115	24.89	0.308	Standard
836.60	-11.07	H	289/145	26.39	0.436	Standard
848.80	-11.13	H	287/170	28.42	0.695	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-10.02	9.70	-19.72
		V	-10.14	9.70	-19.84
1880.00	29.00	H	-10.56	9.70	-20.26
		V	-10.49	9.70	-20.19
1909.80	27.00	H	-12.41	9.70	-22.11
		V	-12.45	9.70	-22.15

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.78	V	220/100	29.06	0.805	Standard
1880.00	-20.15	V	316/100	29.04	0.802	Standard
1909.80	-21.65	V	324/100	27.50	0.562	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 28.42 dBm = 0.695 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 41.42 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-61.11	H	77.99
	3	2472.60	-57.59	H	69.01
	4	3296.80	-67.56	V	75.69
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-59.55	V	74.48
	3	2509.80	-55.68	H	66.84
	4	3346.40	-67.01	H	74.84
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-58.04	V	73.17
	3	2546.40	-52.92	H	64.10
	4	3395.20	-67.03	V	75.13
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.06 dBm = 0.805 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 42.06 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-53.75	H	58.09
	3	5550.60	-66.18	H	65.43
	4	7400.80	-65.22	V	59.89
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-55.44	H	59.39
	3	5640.00	-65.14	H	64.36
	4	7520.00	-66.92	V	61.73
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-60.65	H	64.41
	3	5729.40	-61.72	H	60.11
	4	7639.20	-68.34	H	62.57
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 02. 26

Test Engineer : KJ KWON

Tx Cable loss
Tx Horn Ant Gain
Tx Level to radiate -13dBm
ESI Level received from Tx with -13dBm
Tested Level from EUT
= ERP+2.14 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : H dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-25.78	-25.24	-61.11	-62.08	77.99	78.54
	3	2472.60	-11.25	10.70	-12.50	-30.65	-30.96	-57.59	-61.30	69.01	73.41
	4	3296.80	-13.26	12.30	-12.00	-34.30	-34.88	-68.03	-67.56	76.28	75.69
	5	4121.00	-14.79	12.50	-10.70	-37.37	-37.16	-	-	-	-
	6	4945.20	-16.60	12.70	-9.10	-39.95	-40.17	-	-	-	-
	7	5769.40	-18.02	12.90	-7.90	-42.25	-42.16	-	-	-	-
190	2	1673.20	-9.05	9.50	-13.50	-26.45	-26.15	-60.57	-59.55	76.13	74.48
	3	2509.80	-11.31	10.70	-12.40	-30.90	-30.96	-55.68	-59.76	66.84	71.68
	4	3346.40	-13.33	12.30	-12.00	-34.28	-34.36	-67.01	-67.43	74.84	75.39
	5	4183.00	-15.01	12.50	-10.50	-36.90	-37.13	-	-	-	-
	6	5019.60	-16.84	12.70	-8.90	-40.04	-40.64	-	-	-	-
	7	5856.20	-18.26	12.90	-7.60	-42.75	-42.94	-	-	-	-
251	2	1697.60	-9.07	9.50	-13.40	-26.64	-26.78	-58.44	-58.04	73.17	73.85
	3	2546.40	-11.35	10.70	-12.40	-30.32	-30.81	-52.92	-57.67	64.10	68.29
	4	3395.20	-13.26	12.30	-12.00	-34.25	-34.55	-67.88	-67.03	75.50	75.13
	5	4244.00	-15.20	12.50	-10.30	-37.07	-37.26	-	-	-	-
	6	5092.80	-16.99	12.70	-8.70	-40.12	-40.75	-	-	-	-
	7	5941.60	-18.38	12.90	-7.50	-43.10	-42.67	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 02. 26

Test Engineer : KJ KWON

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : H dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.02	12.40	-11.40	-37.72	-37.72	-53.75	-57.99	58.09	62.33
	3	5550.60	-17.68	12.90	-8.20	-42.81	-43.00	-66.18	-66.86	65.43	65.92
	4	7400.80	-20.47	10.50	-3.00	-47.41	-47.39	-65.88	-65.22	60.53	59.89
	5	9251.00	-23.65	11.20	-0.50	-50.87	-51.74	-	-	-	-
	6	11101.20	-26.73	11.60	2.10	-55.94	-55.98	-	-	-	-
	7	12951.40	-28.60	12.90	2.70	-59.18	-59.44	-	-	-	-
661	2	3760.00	-14.17	12.40	-11.20	-38.11	-38.15	-55.44	-59.11	59.39	63.02
	3	5640.00	-17.83	12.90	-8.10	-42.84	-43.30	-65.14	-66.95	64.36	65.71
	4	7520.00	-20.58	10.60	-3.00	-47.63	-47.25	-68.24	-66.92	62.67	61.73
	5	9400.00	-23.19	11.60	-1.40	-51.86	-52.85	-	-	-	-
	6	11280.00	-26.31	12.10	1.20	-56.33	-56.80	-	-	-	-
	7	13160.00	-28.22	12.80	2.40	-59.42	-59.52	-	-	-	-
810	2	3819.60	-14.18	12.40	-11.20	-38.30	-38.19	-60.65	-65.62	64.41	69.49
	3	5729.40	-17.92	13.00	-8.10	-43.67	-43.62	-61.72	-62.61	60.11	61.05
	4	7639.20	-20.95	11.20	-3.30	-47.83	-48.14	-68.34	-69.02	62.57	62.94
	5	9549.00	-23.60	11.70	-1.10	-52.43	-52.81	-	-	-	-
	6	11458.80	-26.67	11.70	2.00	-56.85	-56.63	-	-	-	-
	7	13368.60	-28.41	12.30	3.10	-60.50	-59.87	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	21.7	8.37E+08	2.59E-06	0.025938
100%		-30	-37.8	8.37E+08	-4.5E-06	-0.04518
100%		-20	18.3	8.37E+08	2.19E-06	0.021874
100%		-10	-35.4	8.37E+08	-4.2E-06	-0.04231
100%		0	-28.1	8.37E+08	-3.4E-06	-0.03359
100%		+10	-16.4	8.37E+08	-2E-06	-0.0196
100%		+20	21.7	8.37E+08	2.59E-06	0.025938
100%		+30	25.8	8.37E+08	3.08E-06	0.030839
100%		+40	-35.8	8.37E+08	-4.3E-06	-0.04279
100%		+50	27.3	8.37E+08	3.26E-06	0.032632
100%		+60	-16.5	8.37E+08	-2E-06	-0.01972
85%	3.35	+20	-1.8	8.37E+08	-2.2E-07	-0.00215
115%	4.26	+20	28.4	8.37E+08	3.39E-06	0.033947
Batt.Endpoint	3.35	+20	-1.8	8.37E+08	-2.2E-07	-0.00215


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

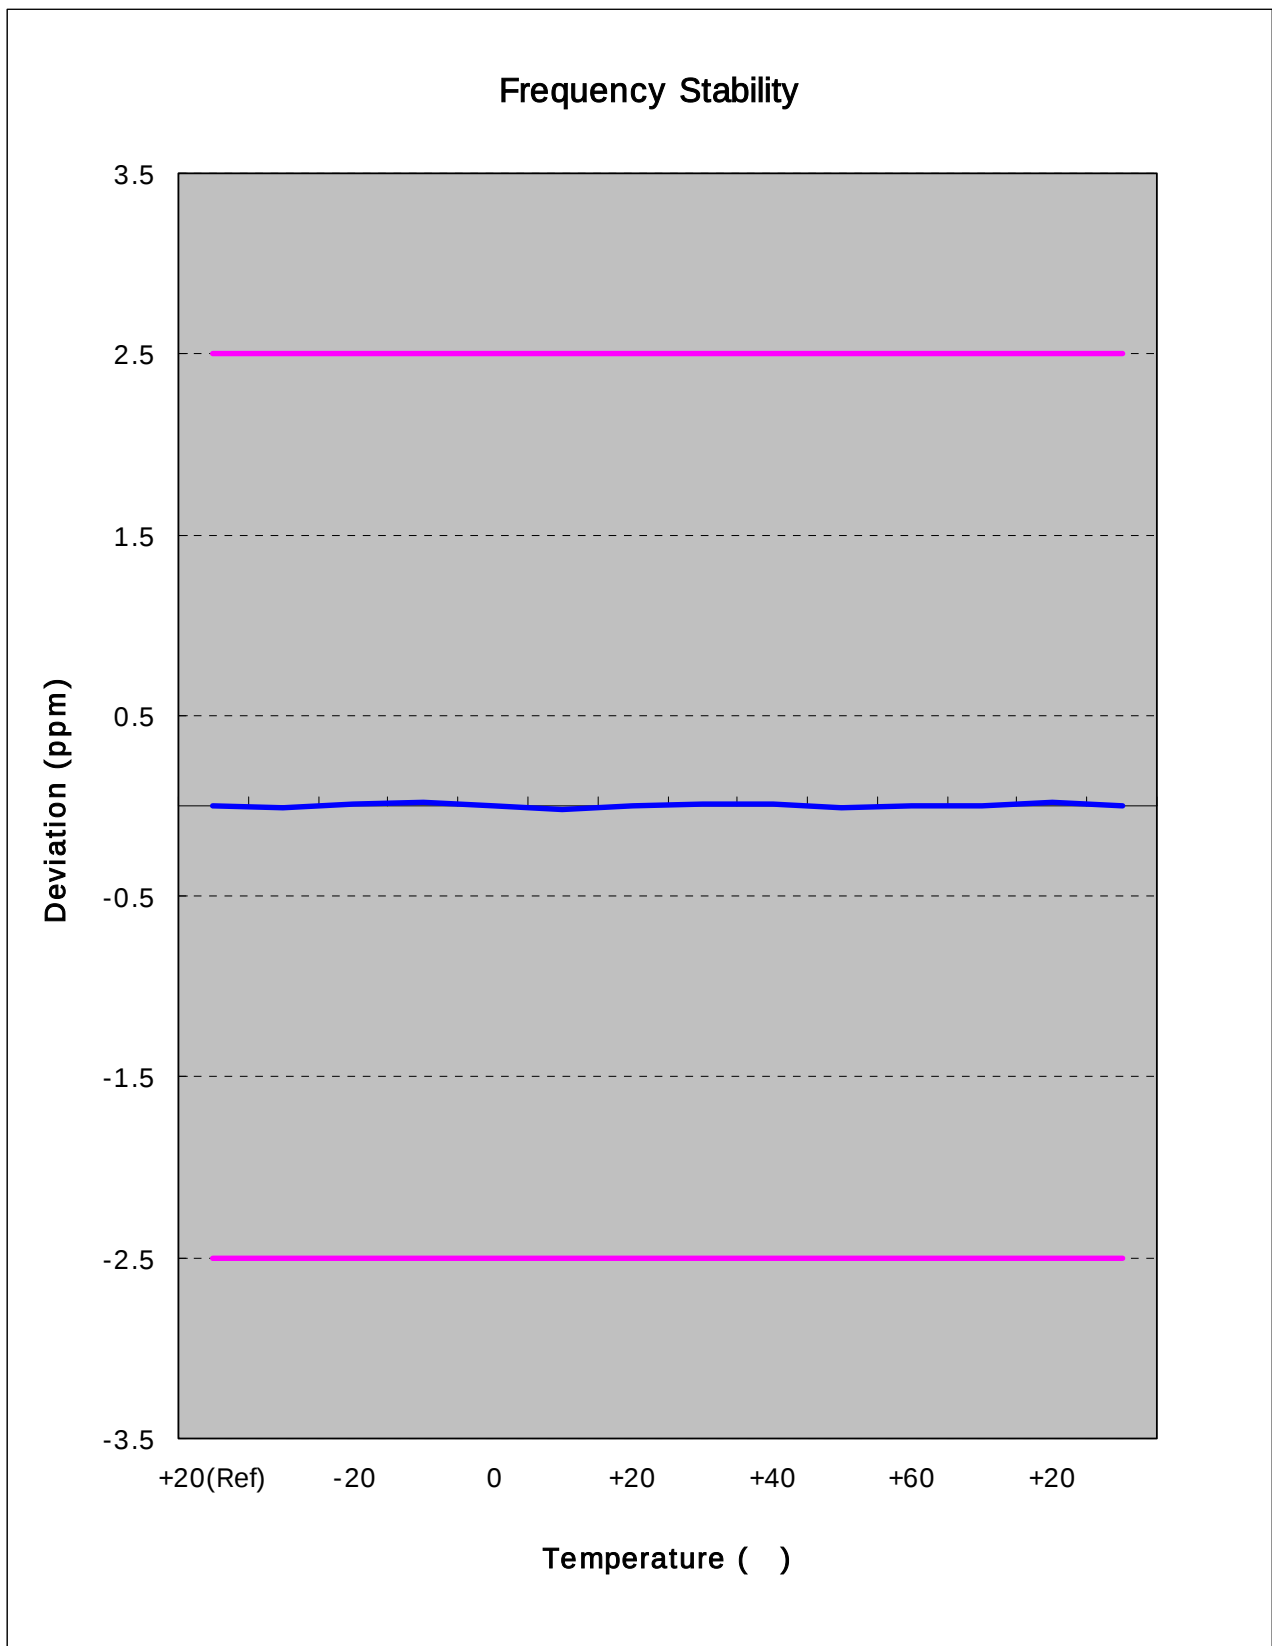

Zoom IN

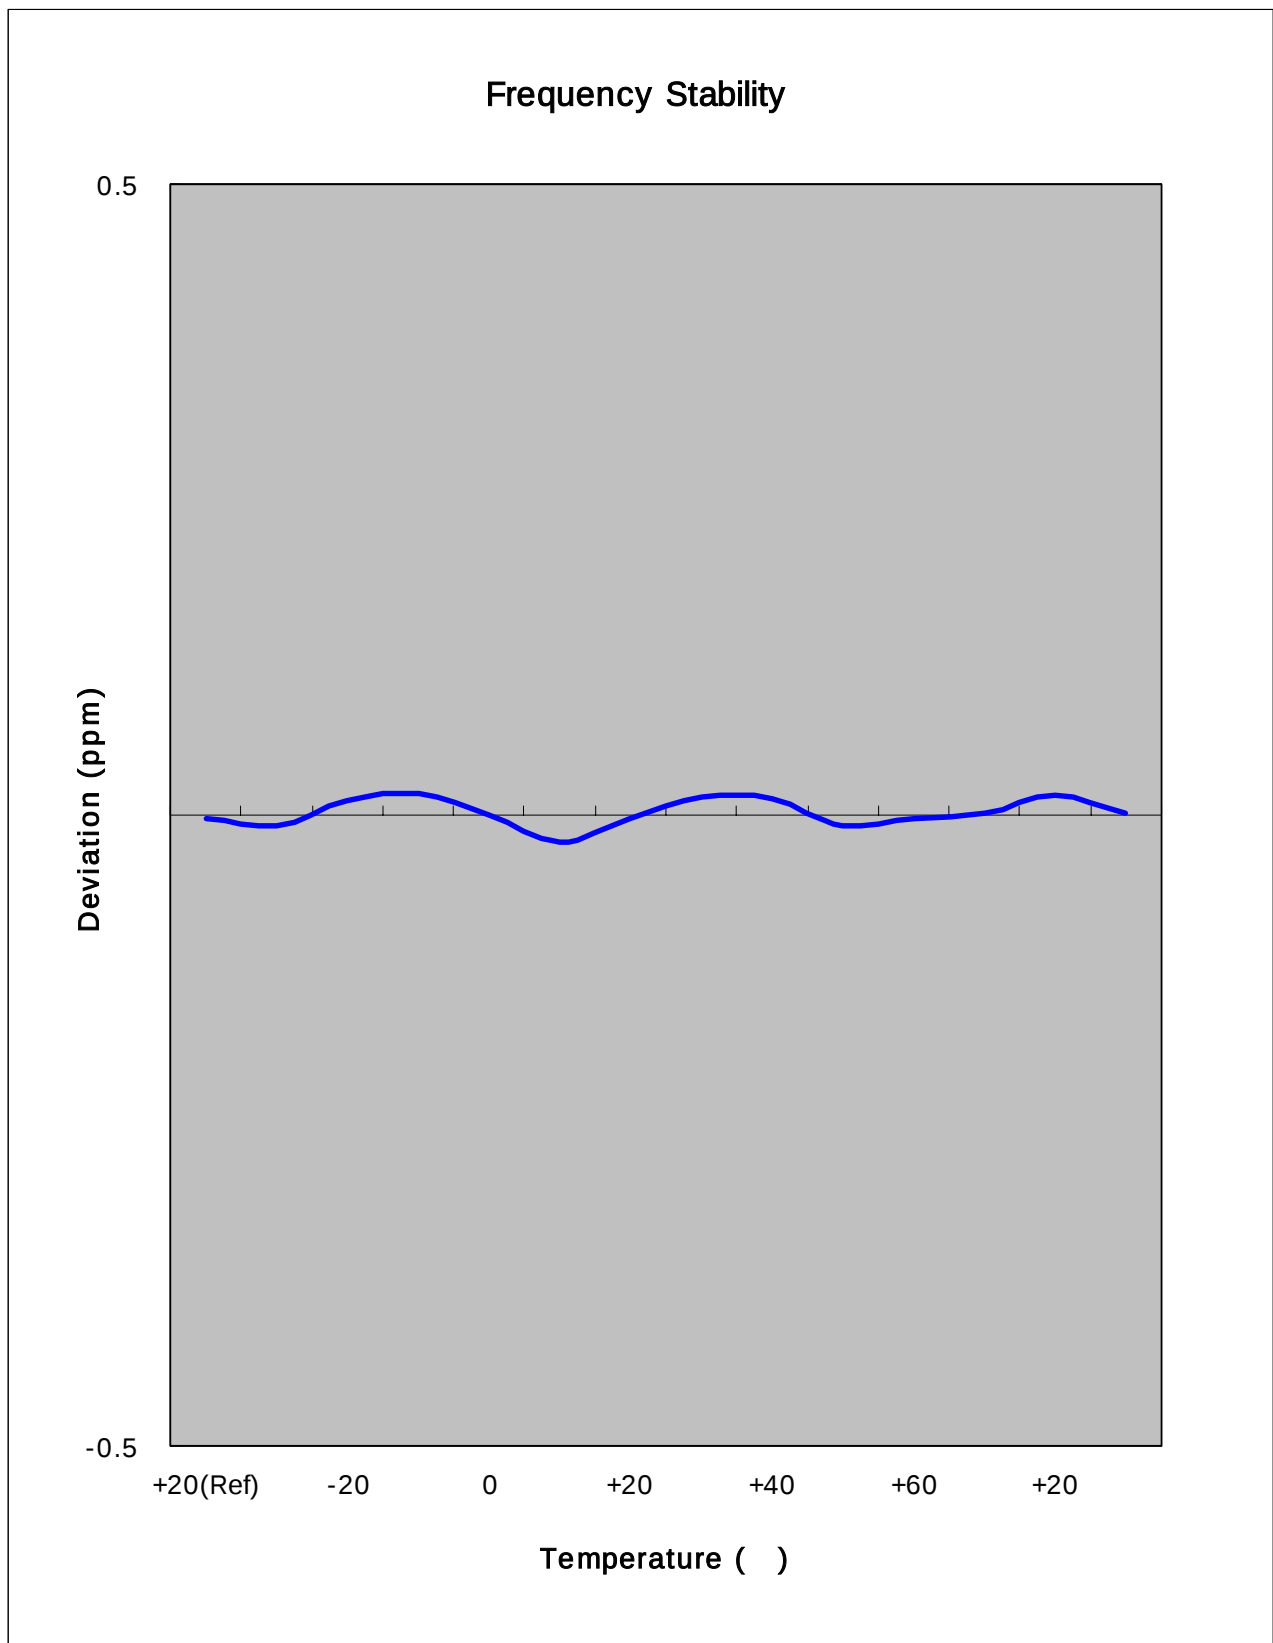

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	- 21.3	1.88E+09	- 1.1E - 06	- 0.01133
100%		-30	- 9.8	1.88E+09	- 5.2E - 07	- 0.00521
100%		-20	- 35.8	1.88E+09	- 1.9E - 06	- 0.01904
100%		-10	34.6	1.88E+09	1.84E - 06	0.018404
100%		0	31	1.88E+09	1.65E - 06	0.016489
100%		+10	28.3	1.88E+09	1.51E - 06	0.015053
100%		+20	- 21.3	1.88E+09	- 1.1E - 06	- 0.01133
100%		+30	- 26.3	1.88E+09	- 1.4E - 06	- 0.01399
100%		+40	- 5	1.88E+09	- 2.7E - 07	- 0.00266
100%		+50	- 37.2	1.88E+09	- 2E - 06	- 0.01979
100%		+60	- 8.3	1.88E+09	- 4.4E - 07	- 0.00441
85%	3.35	+20	- 33	1.88E+09	- 1.8E - 06	- 0.01755
115%	4.26	+20	4.6	1.88E+09	2.45E - 07	0.002447
Batt.Endpoint	3.35	+20	- 33	1.88E+09	- 1.8E - 06	- 0.01755


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

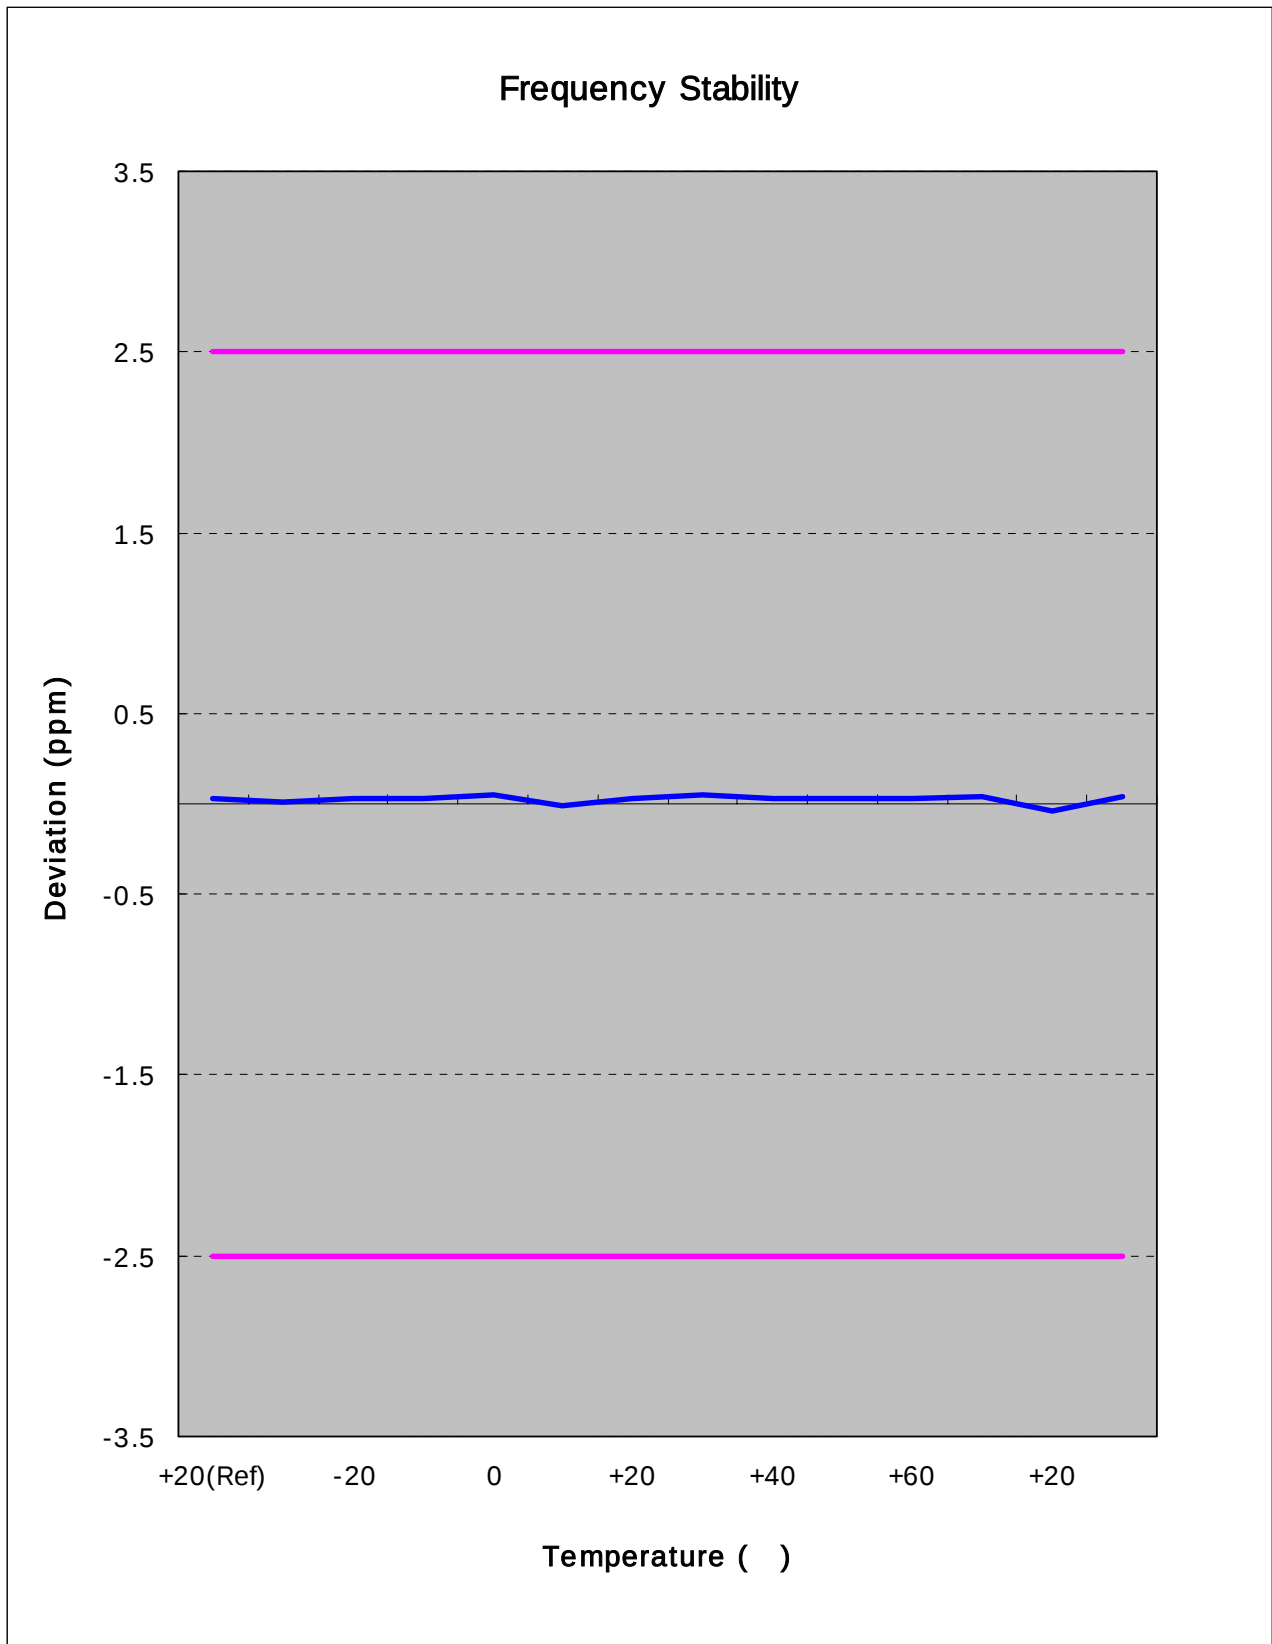

Zoom IN

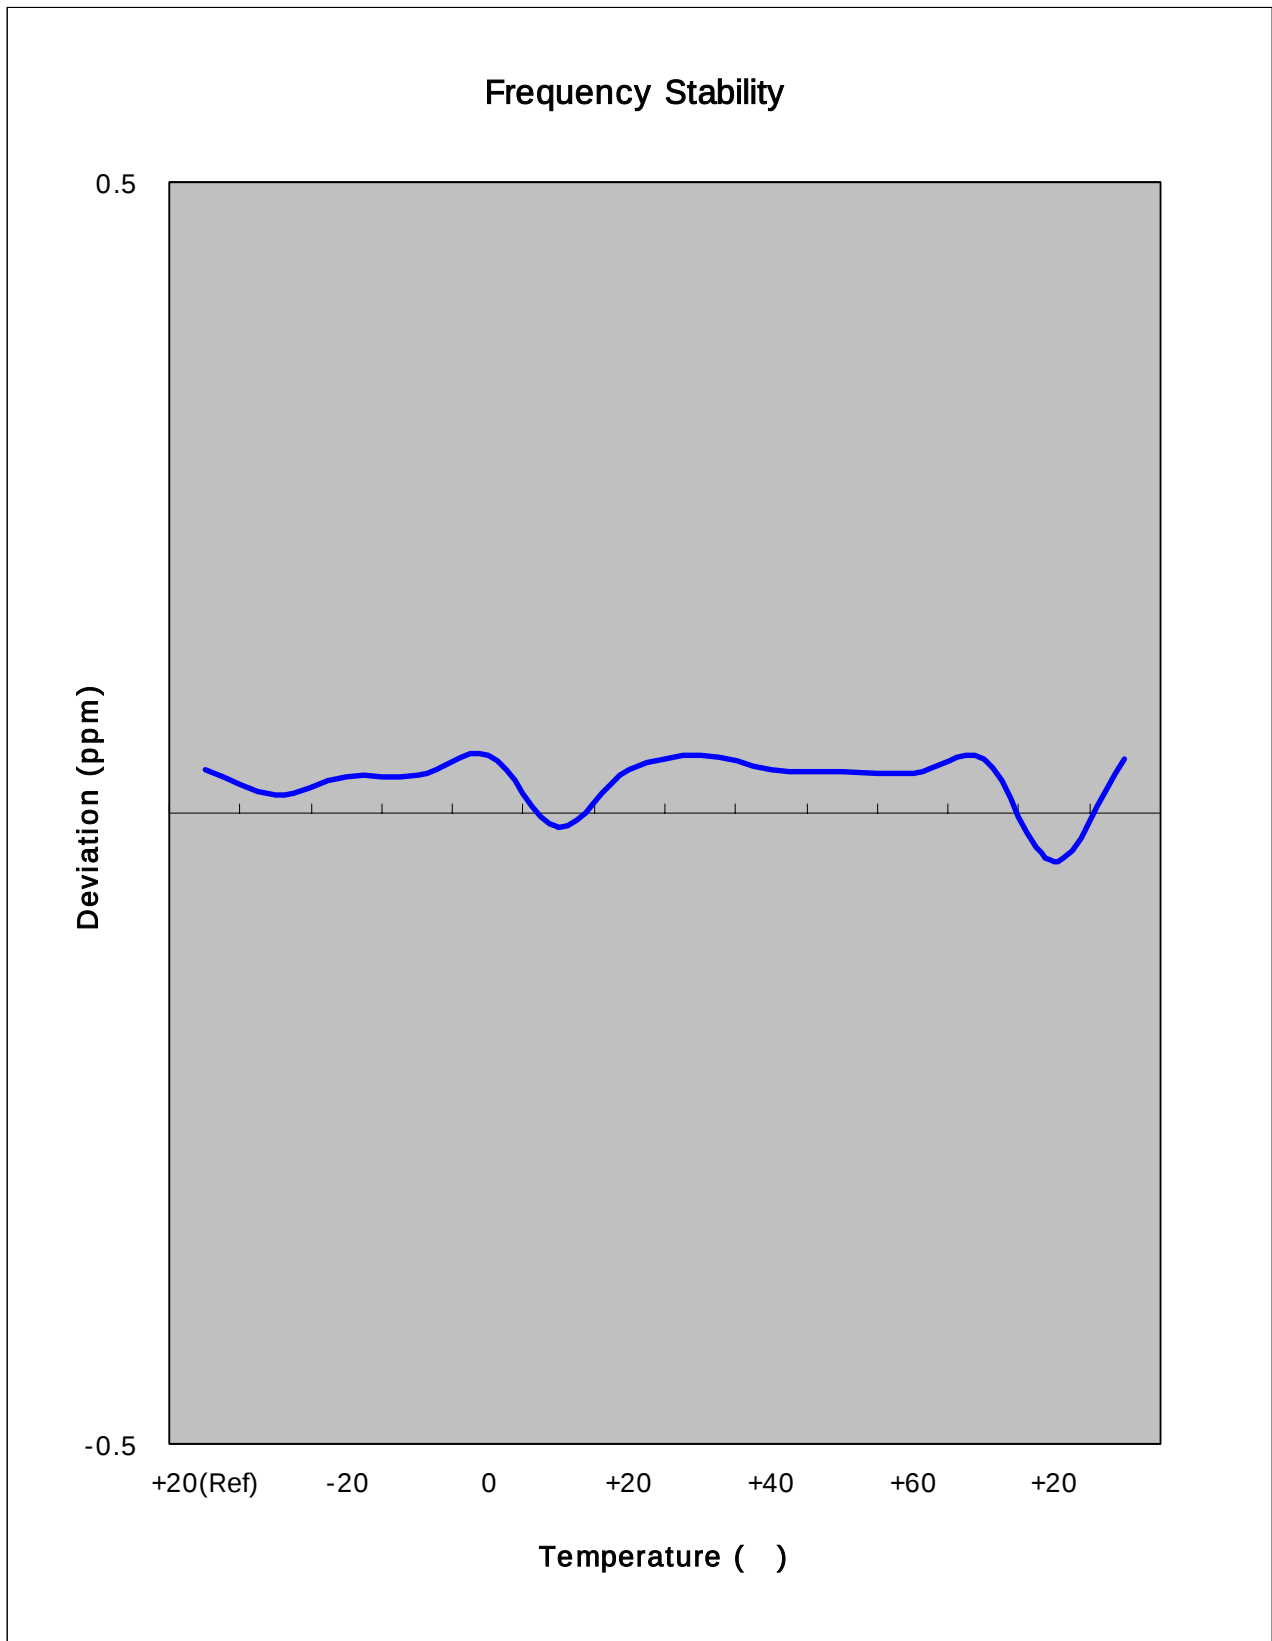



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM Phone with EDGE Rx only and Bluetooth.

FCC ID : A3LSWDM2710 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS


GSM850



Agilent

R T


Freq/Channel

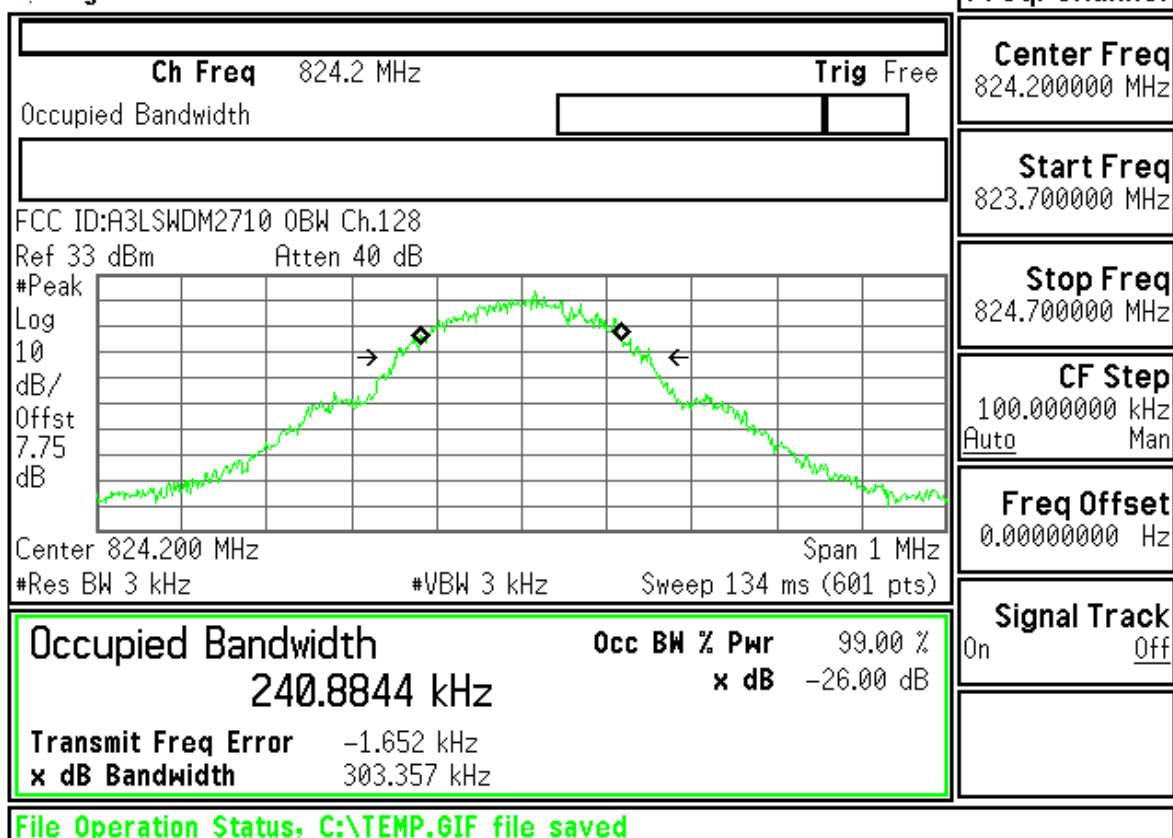
Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T

Freq/Channel

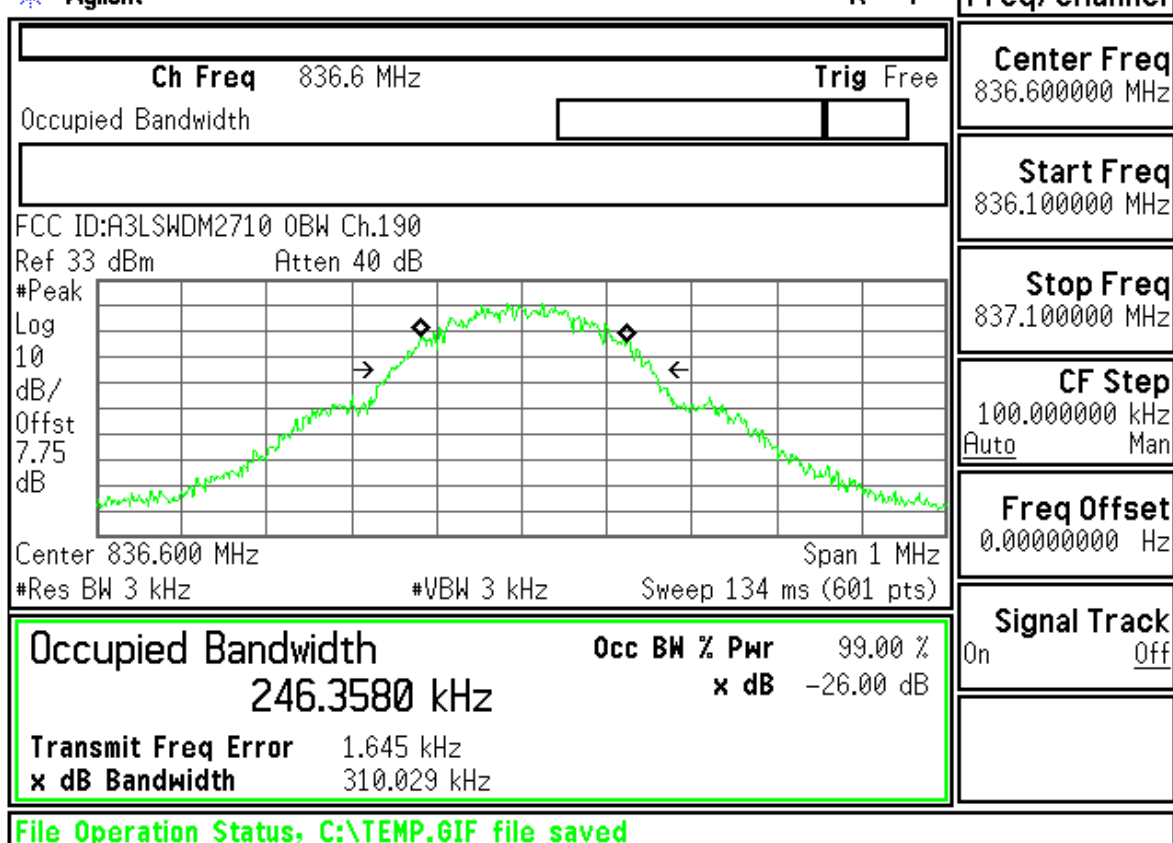Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off


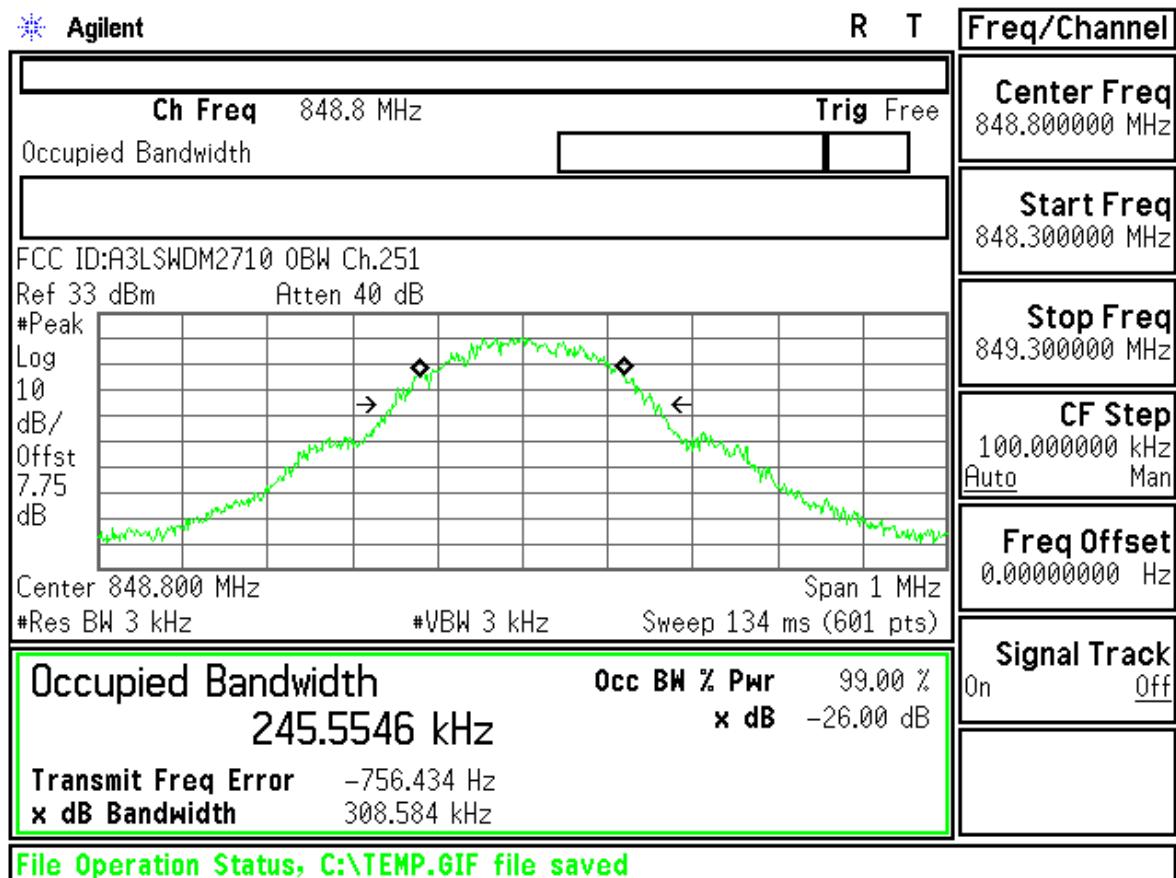




Measurement/Instrument Screen																																			
Control		Transmit Power								TCH Parms																									
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.41</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.41</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.41	----	----	----	Estimated Carrier Power	32.41	----	----	----	Downlink Traffic Power										
											Burst 1	Burst 2	Burst 3	Burst 4																					
										Burst Power	32.41	----	----	----																					
		Estimated Carrier Power	32.41	----	----	----																													
		Traffic Band																																	
GSN850																																			
Swap Window Positions		<table><tr><td colspan="4">Phase & Frequency Error</td></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>1.49</td><td>0.58</td><td>-29.33</td></tr><tr><td>Maximum</td><td>2.28</td><td>0.73</td><td>-22.62</td></tr><tr><td>Average</td><td>1.80</td><td>0.63</td><td>-26.44</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>								Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.49	0.58	-29.33	Maximum	2.28	0.73	-22.62	Average	1.80	0.63	-26.44	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
										Phase & Frequency Error																									
											Peak Phase °	RMS Phase °	Frequency Hz																						
		Minimum	1.49	0.58	-29.33																														
		Maximum	2.28	0.73	-22.62																														
Average	1.80	0.63	-26.44																																
Pass/Fail	Pass	Pass	Pass																																
128																																			
MS TX Level																																			
5																																			
Channel Mode Setup																																			
Return																																			
1 of 2		50 / 50								Single																									
		Active Cell Connected				Sys Type: GSM																													
					IntRef	Offset	R	T				1 of 2																							


Measurement/Instrument Screen																										
Control		Transmit Power								TCH Parms																
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>32.21</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>32.21</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.21	----	----	----	Estimated Carrier Power	32.21	----	----	----	Downlink Traffic Power	
	Burst 1									Burst 2	Burst 3	Burst 4														
Burst Power	32.21									----	----	----														
Estimated Carrier Power	32.21									----	----	----														
Swap Window Positions		Traffic Band																								
		GSM850																								
		Traffic Channel																								
		190																								
		MS TX Level																								
										5																
										Channel Mode Setup																
										Return																
		50 / 50								Single																
		Active Cell Connected				Sys Type: GSM																				
1 of 2						IntRef	Offset	R	T	1 of 2																

Measurement/Instrument Screen																																	
Control		Transmit Power						TCH Parms																									
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.12</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.12</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.12	----	----	----	Estimated Carrier Power	32.12	----	----	----	Downlink Traffic Power										
			Burst 1	Burst 2	Burst 3	Burst 4																											
		Burst Power	32.12	----	----	----																											
		Estimated Carrier Power	32.12	----	----	----																											
Traffic Band																																	
Swap Window Positions		<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.49</td> <td>0.56</td> <td>-21.74</td> </tr> <tr> <td>Maximum</td> <td>2.15</td> <td>0.90</td> <td>-12.63</td> </tr> <tr> <td>Average</td> <td>1.85</td> <td>0.66</td> <td>-16.87</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>						Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.49	0.56	-21.74	Maximum	2.15	0.90	-12.63	Average	1.85	0.66	-16.87	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	1.49	0.56	-21.74																														
Maximum	2.15	0.90	-12.63																														
Average	1.85	0.66	-16.87																														
Pass/Fail	Pass	Pass	Pass																														
1 of 2		50 / 50 Active Cell Connected Sys Type: GSM						251																									
		IntRef Offset R T						MS TX Level																									
								5																									
								Channel Mode Setup																									
								Return																									
								1 of 2																									

Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power																					
Change View								Traffic Band																					
								GSM850																					
								Traffic Channel																					
		<table border="1"> <thead> <tr> <th>Burst</th> <th>Px Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.43</td> <td>GSM</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	Px Power (dBm)	Modulation	Mask	1	32.43	GSM	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	128	
Burst	Px Power (dBm)	Modulation	Mask																										
1	32.43	GSM	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
1 of 2		Active Cell Connected Sys Type: GSM						MS TX Level																					
		IntRef Offset R T						5																					
								Channel Mode Setup																					
								Return																					
								1 of 2																					

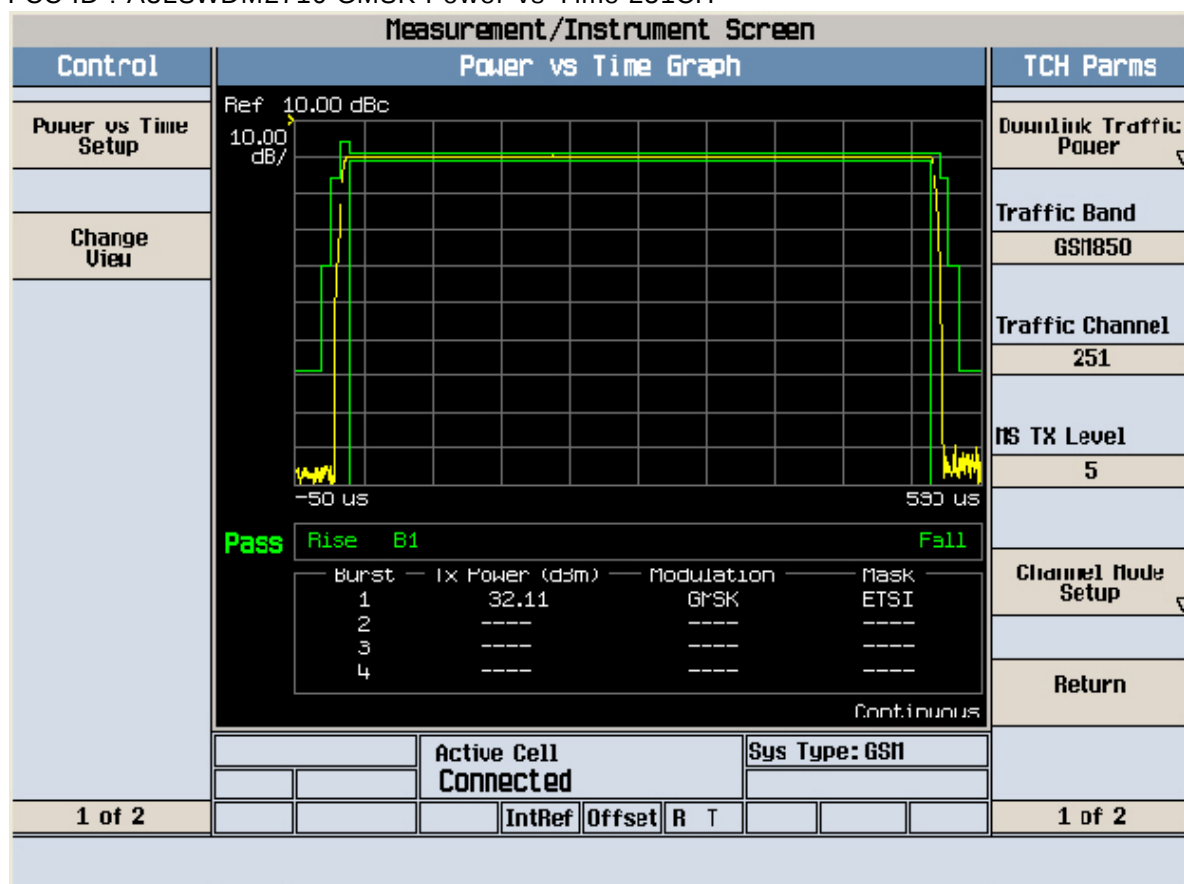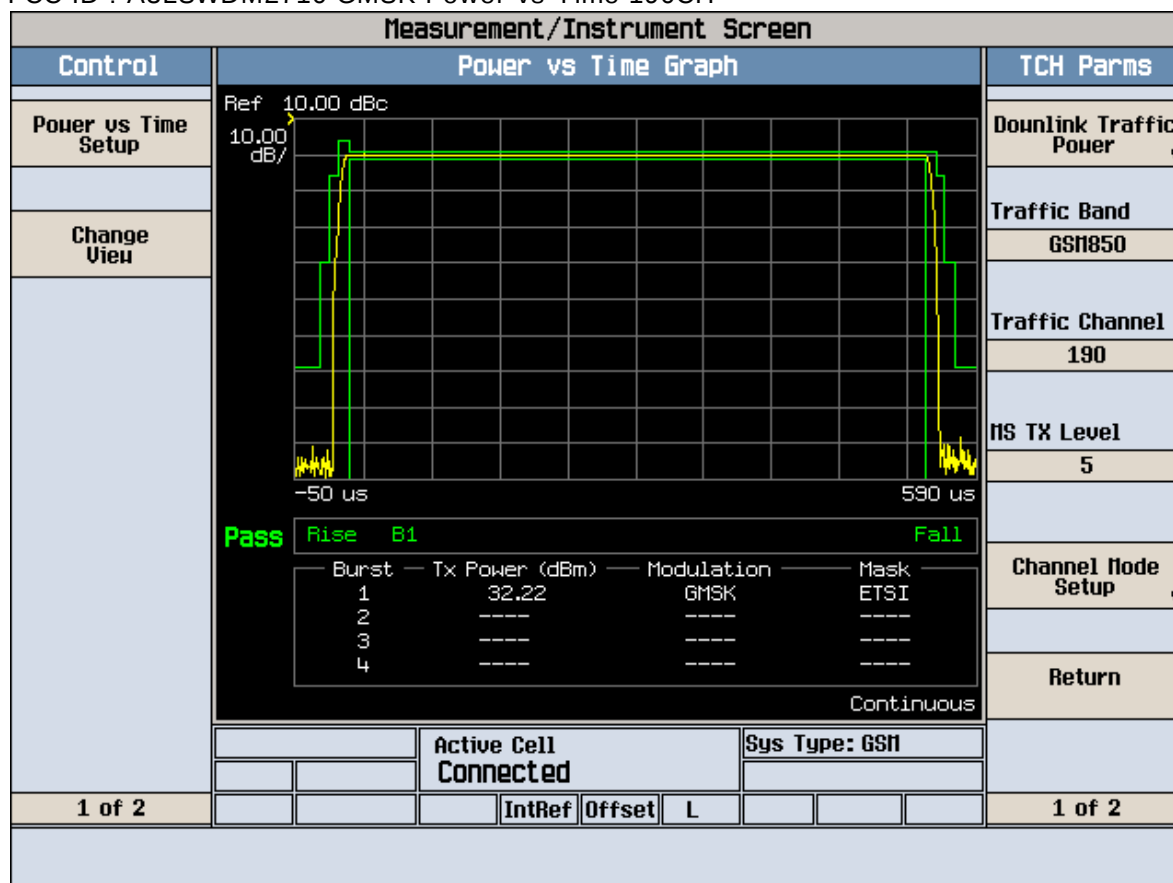

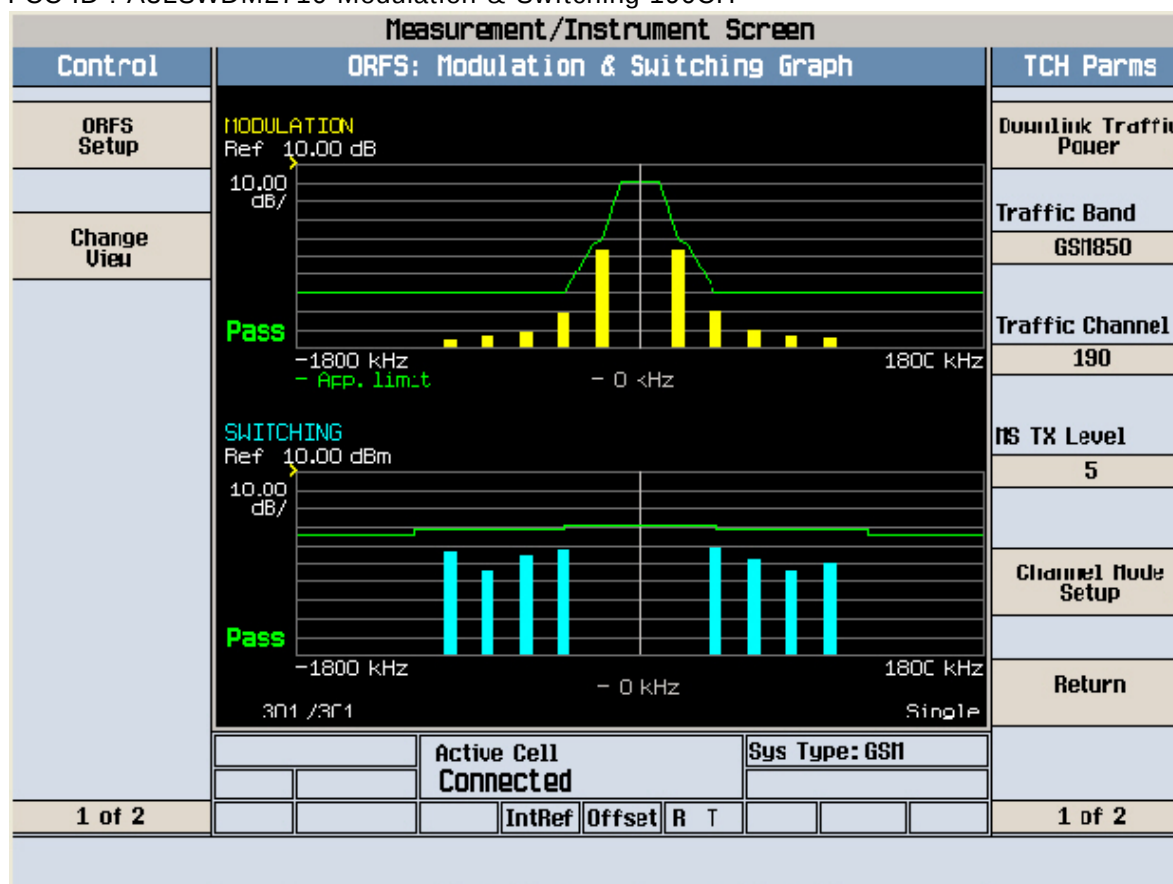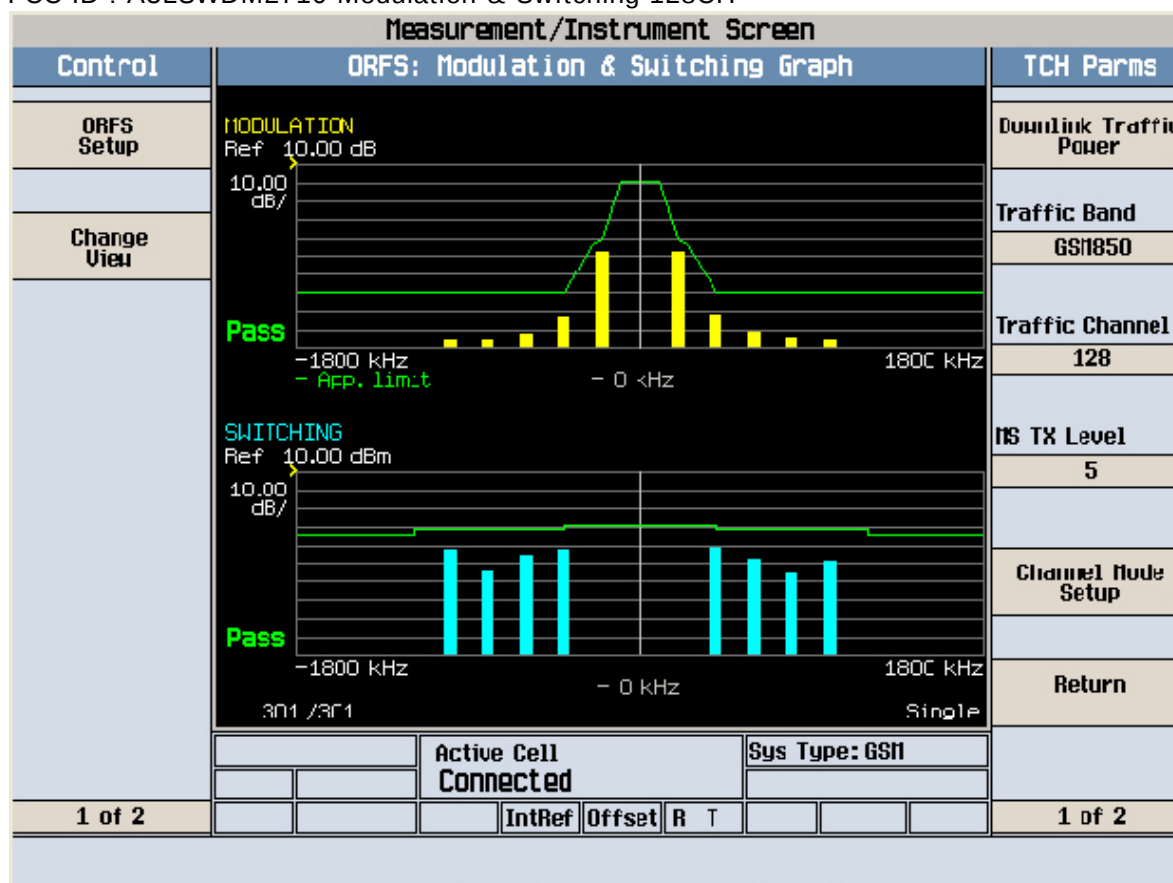

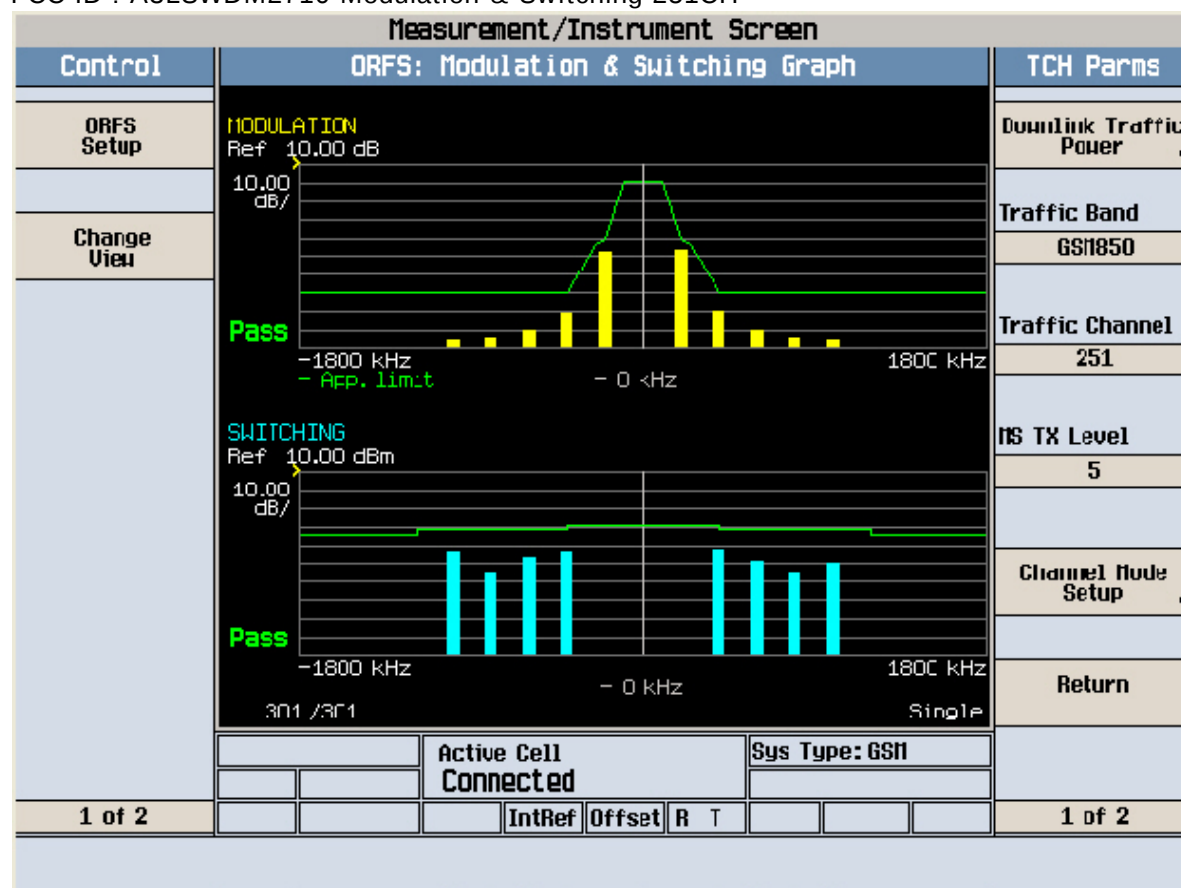

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.128

Mkr1 718.0 MHz

Ref 33 dBm

Atten 40 dB

-33.33 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

414.600000 MHz

Start Freq

10.0000000 MHz

Stop Freq

819.200000 MHz

CF Step

80.9200000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.36 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

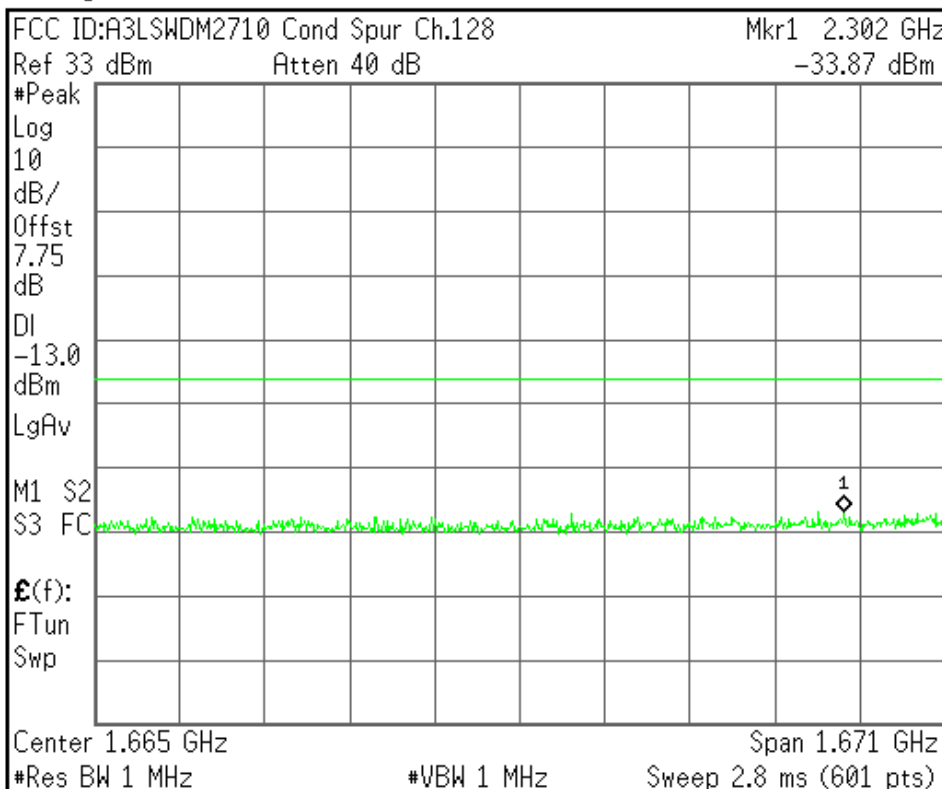

Center Freq
1.66460000 GHz

Start Freq
829.200000 MHz

Stop Freq
2.50000000 GHz

CF Step
167.080000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

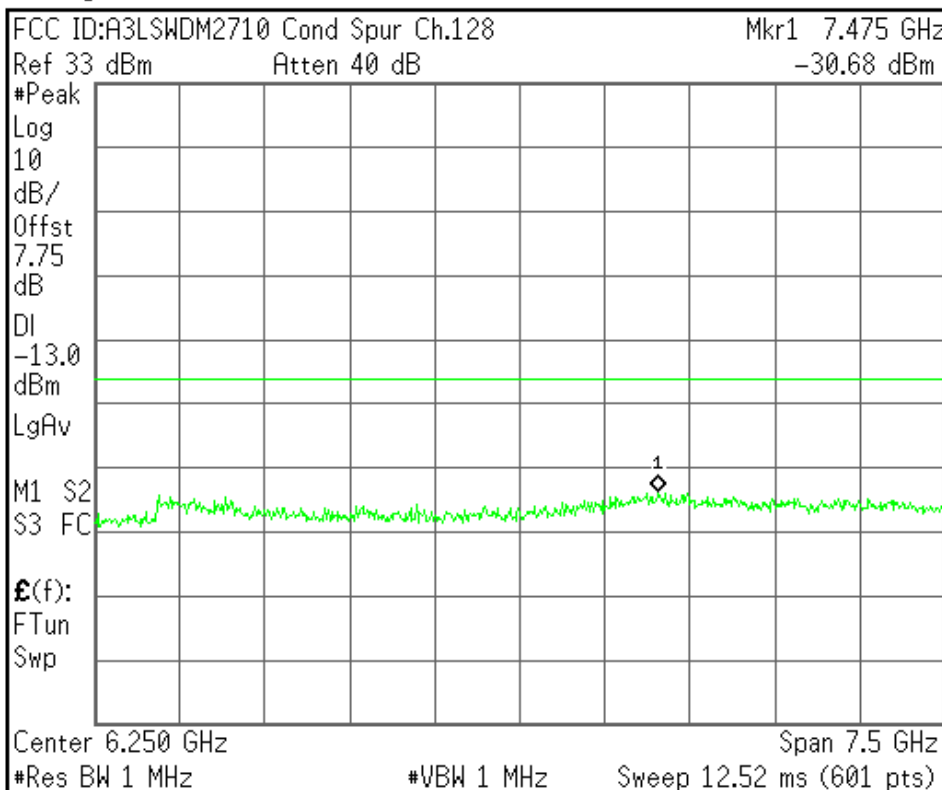

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.190

Mkr1 415.3 MHz

Ref 33 dBm

Atten 40 dB

-34.28 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

420.800000 MHz

Start Freq

10.0000000 MHz

Stop Freq

831.600000 MHz

CF Step

82.1600000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.190

Mkr1 2.403 GHz

Ref 33 dBm

Atten 40 dB

-33.82 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

Center 1.671 GHz

Span 1.658 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 2.8 ms (601 pts)

Center Freq
1.67080000 GHz

Start Freq
841.600000 MHz

Stop Freq
2.50000000 GHz

CF Step
165.840000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.190

Mkr1 7.688 GHz

Ref 33 dBm

Atten 40 dB

-30.24 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

Center 6.250 GHz

Span 7.5 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 12.52 ms (601 pts)

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.251

Ref 33 dBm Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.251

Mkr1 397.7 MHz

Ref 33 dBm

Atten 40 dB

-33.99 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

426.900000 MHz

Start Freq

10.0000000 MHz

Stop Freq

843.800000 MHz

CF Step

83.3800000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

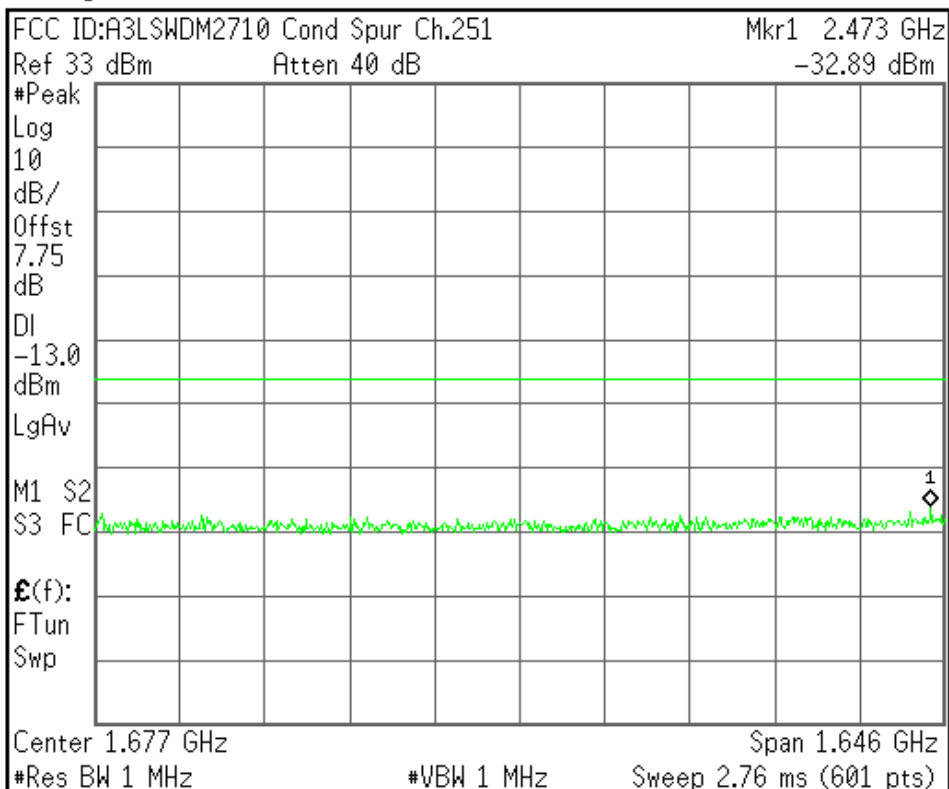

Center Freq
1.67690000 GHz

Start Freq
853.800000 MHz

Stop Freq
2.50000000 GHz

CF Step
164.620000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

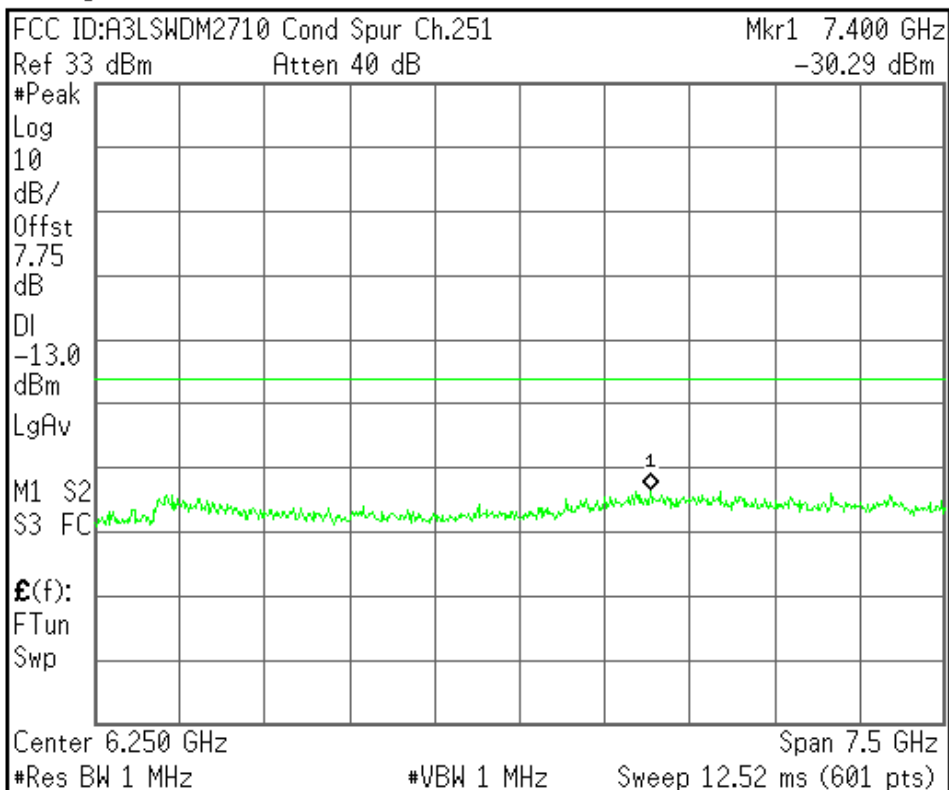

Center Freq
6.25000000 GHz

Start Freq
2.50000000 GHz

Stop Freq
10.00000000 GHz

CF Step
750.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

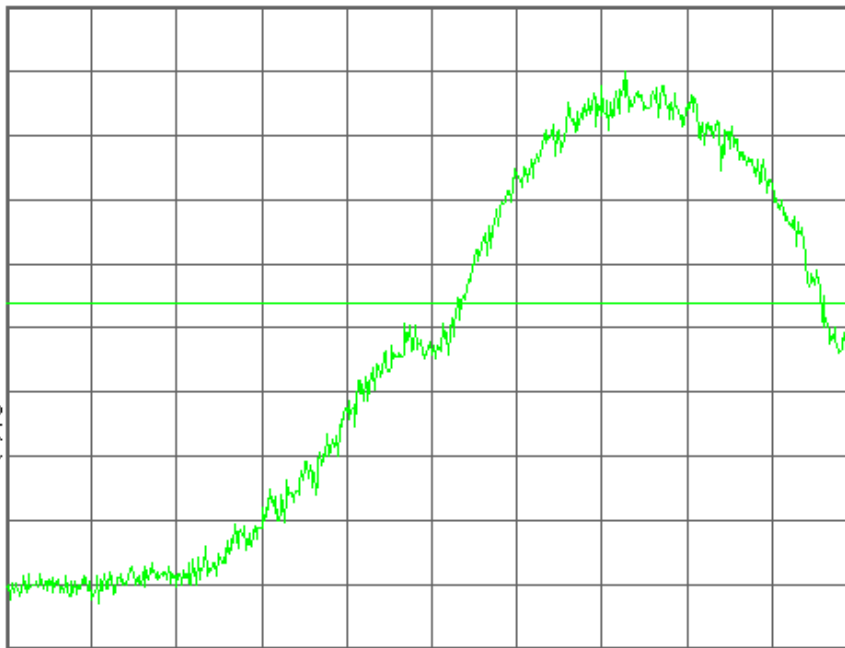

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.128

Mkr1 823.977 3 MHz

Ref 33 dBm

Atten 40 dB

-14.57 dBm

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

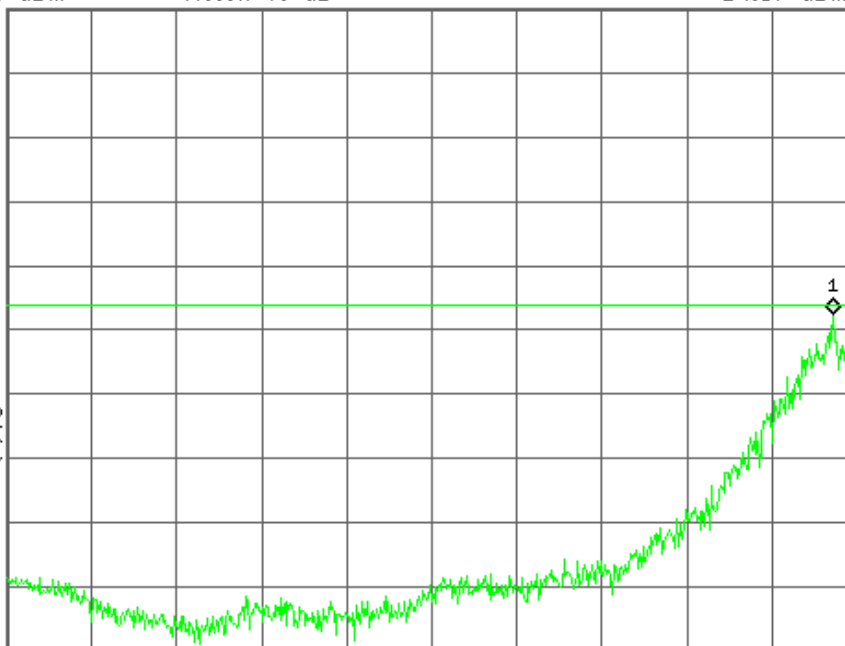

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

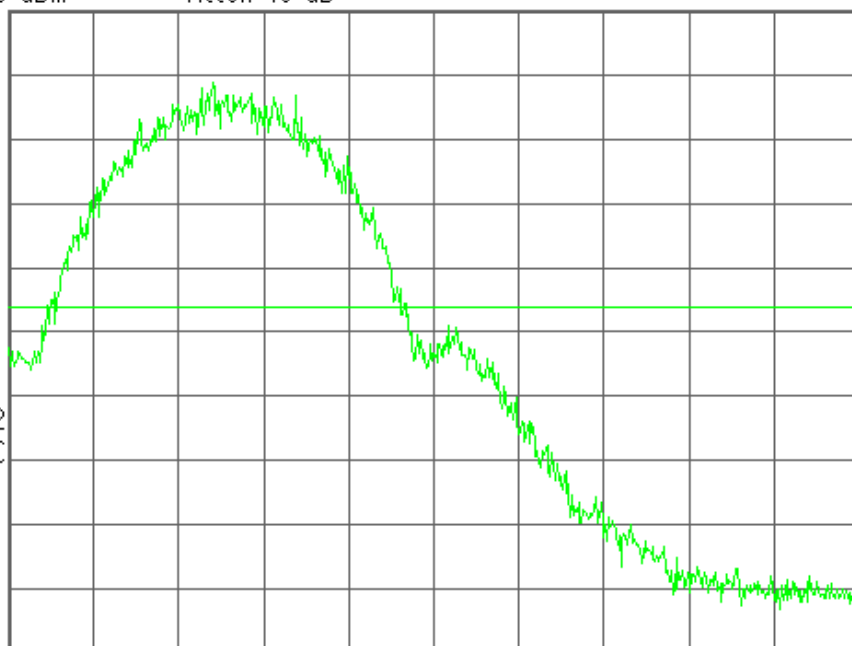

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

Mkr1 849.017 4 MHz

-16.53 dBm

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

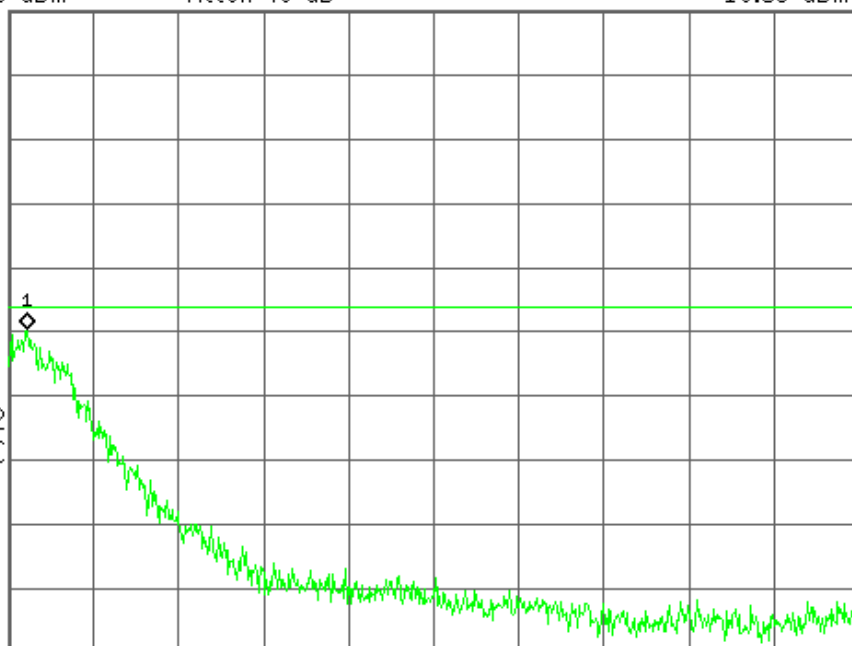

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

GSM1900



Agilent

R T

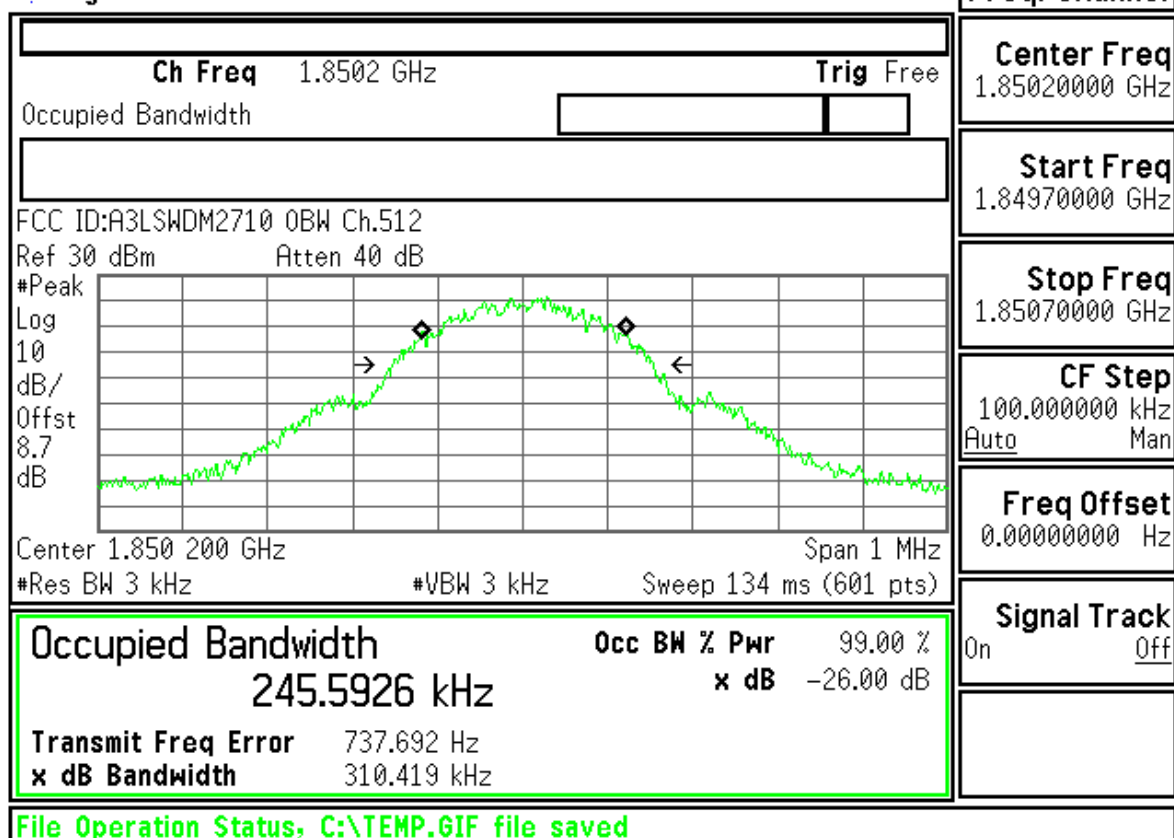

Freq/Channel

Center Freq
 1.85020000 GHz

Start Freq
 1.84970000 GHz

Stop Freq
 1.85070000 GHz


CF Step
 100.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off


Agilent

R T

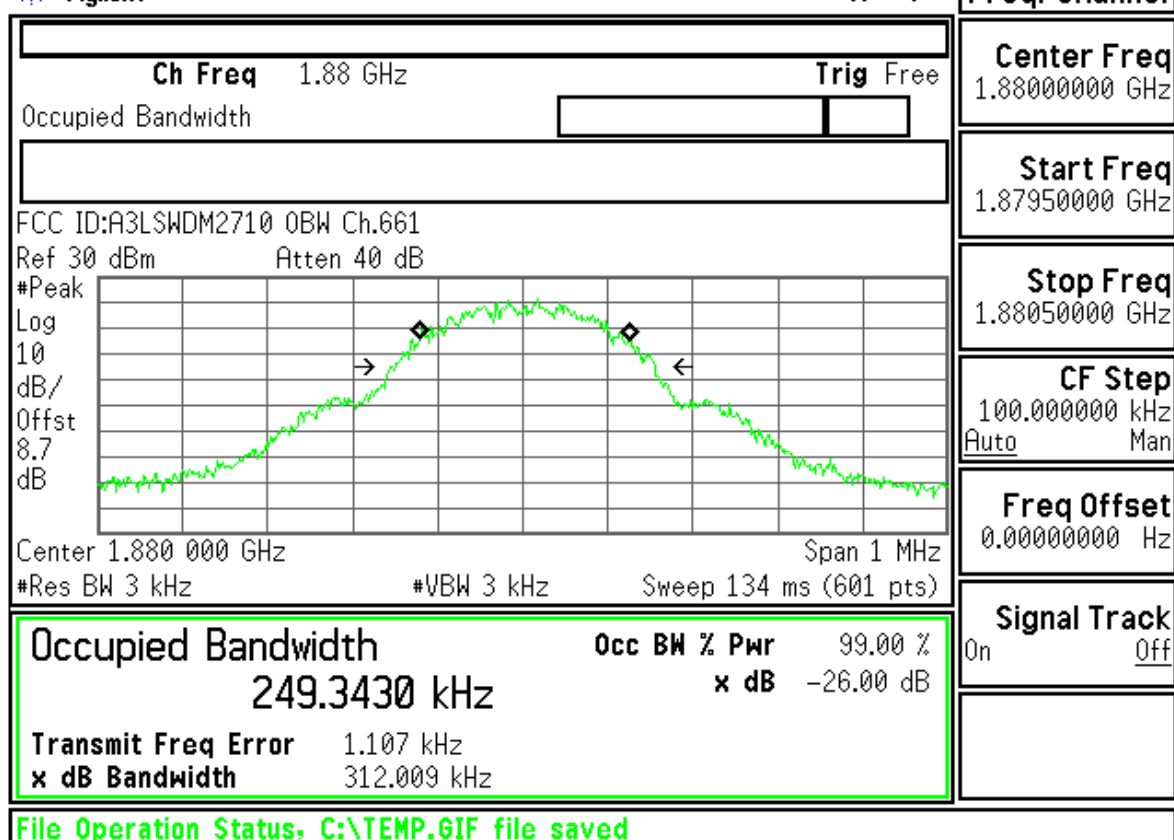

Freq/Channel

Center Freq
 1.88000000 GHz


Start Freq
 1.87950000 GHz

Stop Freq
 1.88050000 GHz

CF Step
 100.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

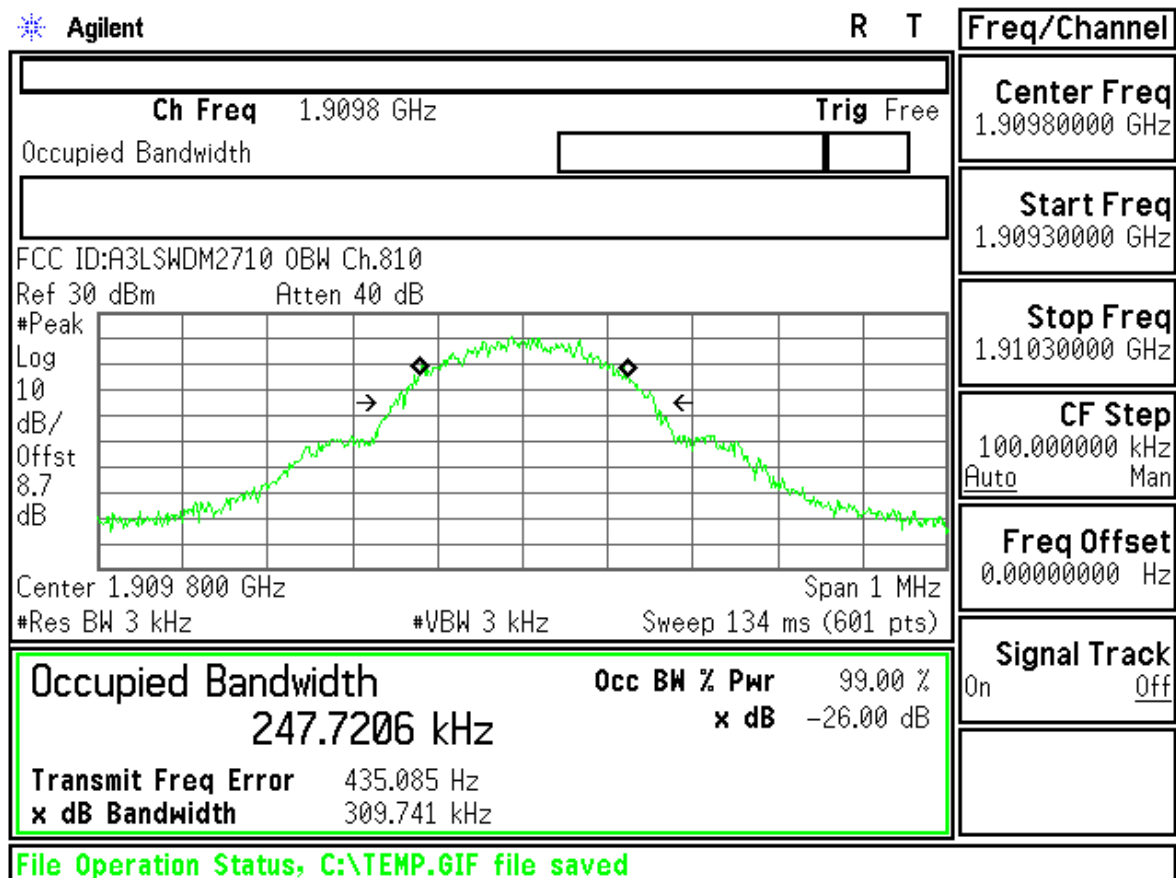

FCC ID : A3LSWDM2710 Transmit Power 512CH



Measurement/Instrument Screen																																					
Control		Transmit Power								TCH Parms																											
Transmit Power Setup		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.42</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.42</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.42	----	----	----	Estimated Carrier Power	29.42	----	----	----	Downlink Traffic Power												
											Burst 1	Burst 2	Burst 3	Burst 4																							
										Burst Power	29.42	----	----	----																							
										Estimated Carrier Power	29.42	----	----	----																							
		Traffic Band																																			
PCS																																					
Snap Window Positions		<table><tr><th colspan="4">Phase & Frequency Error</th></tr><tr><th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr><tr><td>Minimum</td><td>1.70</td><td>0.60</td><td>-69.59</td></tr><tr><td>Maximum</td><td>2.76</td><td>0.84</td><td>-48.27</td></tr><tr><td>Average</td><td>2.25</td><td>0.72</td><td>-60.24</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>								Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.70	0.60	-69.59	Maximum	2.76	0.84	-48.27	Average	2.25	0.72	-60.24	Pass/Fail	Pass	Pass	Pass	Traffic Channel			
										Phase & Frequency Error																											
											Peak Phase °	RMS Phase °	Frequency Hz																								
										Minimum	1.70	0.60	-69.59																								
		Maximum	2.76	0.84	-48.27																																
Average	2.25	0.72	-60.24																																		
Pass/Fail	Pass	Pass	Pass																																		
512																																					
MS TX Level																																					
0																																					
Channel Mode Setup																																					
Return																																					
1 of 2		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="4"></td><td colspan="2"></td></tr><tr><td></td><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>										Active Cell Connected				Sys Type: GSM												IntRef	Offset	R	T				1 of 2		
		Active Cell Connected				Sys Type: GSM																															
		IntRef	Offset	R	T																																



Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								661	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
1 of 2								Return	
								1 of 2	



Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								810	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
1 of 2								Return	
								1 of 2	

Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								810	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
1 of 2								Return	
								1 of 2	

Measurement/Instrument Screen									
Control	Transmit Power							TCH Parms	
Transmit Power Setup ▾								Downlink Traffic Power ▾	
								Traffic Band	
								PCS	
								Traffic Channel	
Swap Window Positions								810	
								MS TX Level	
								0	
								Channel Mode Setup ▾	
1 of 2								Return	
								1 of 2	

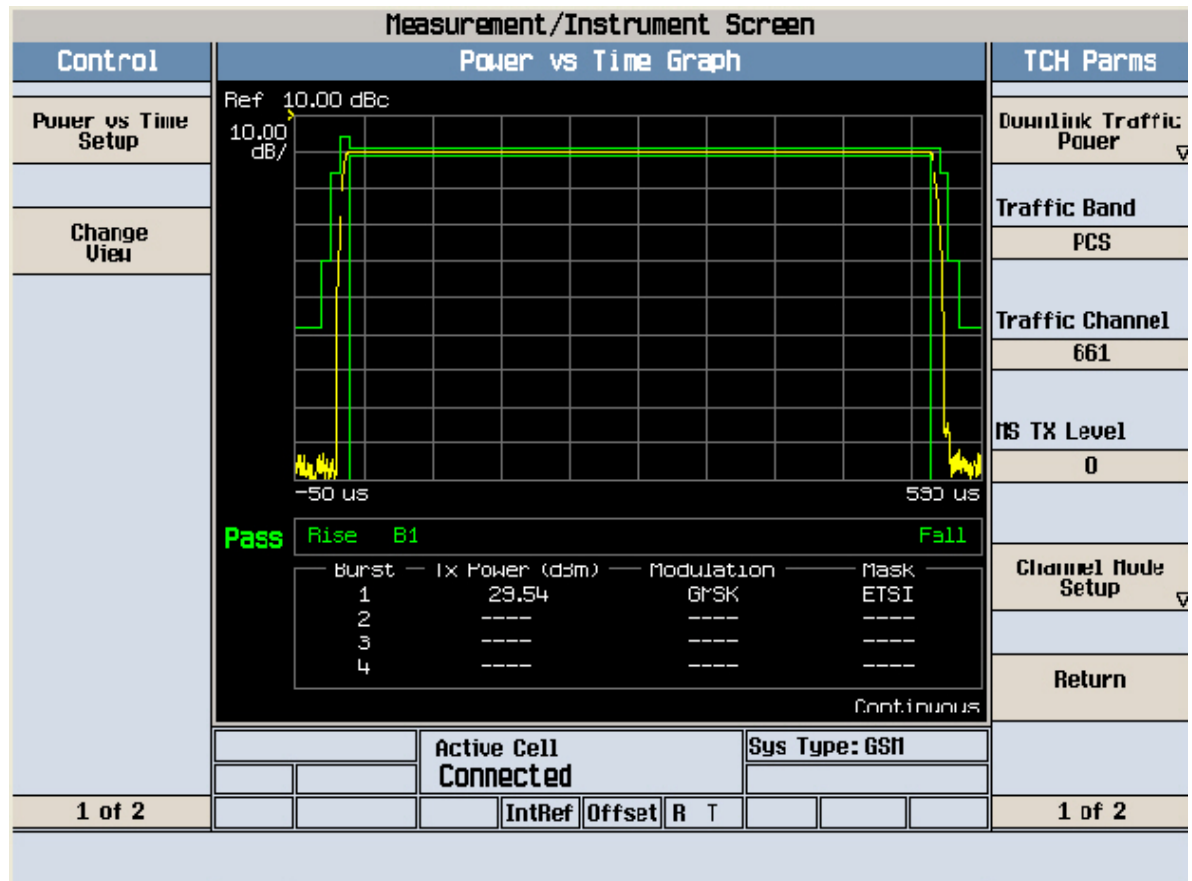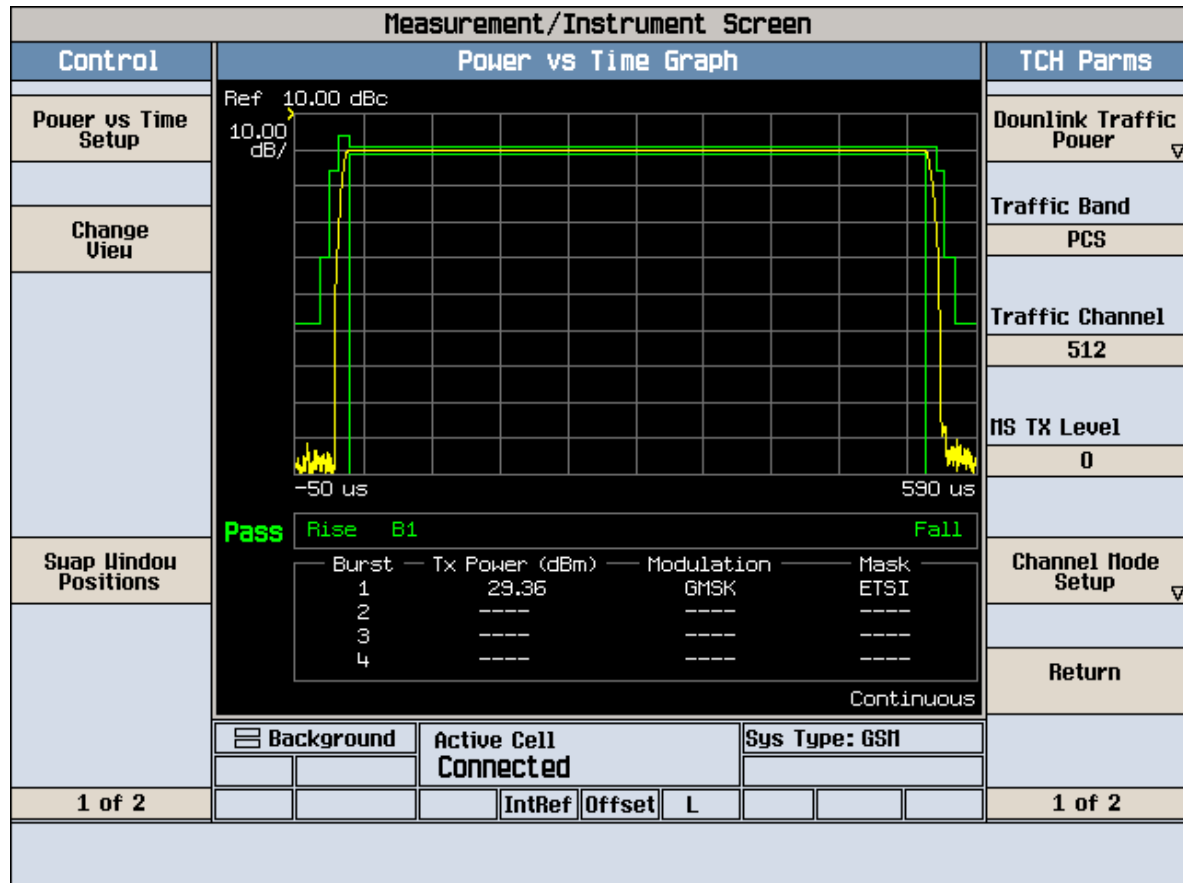

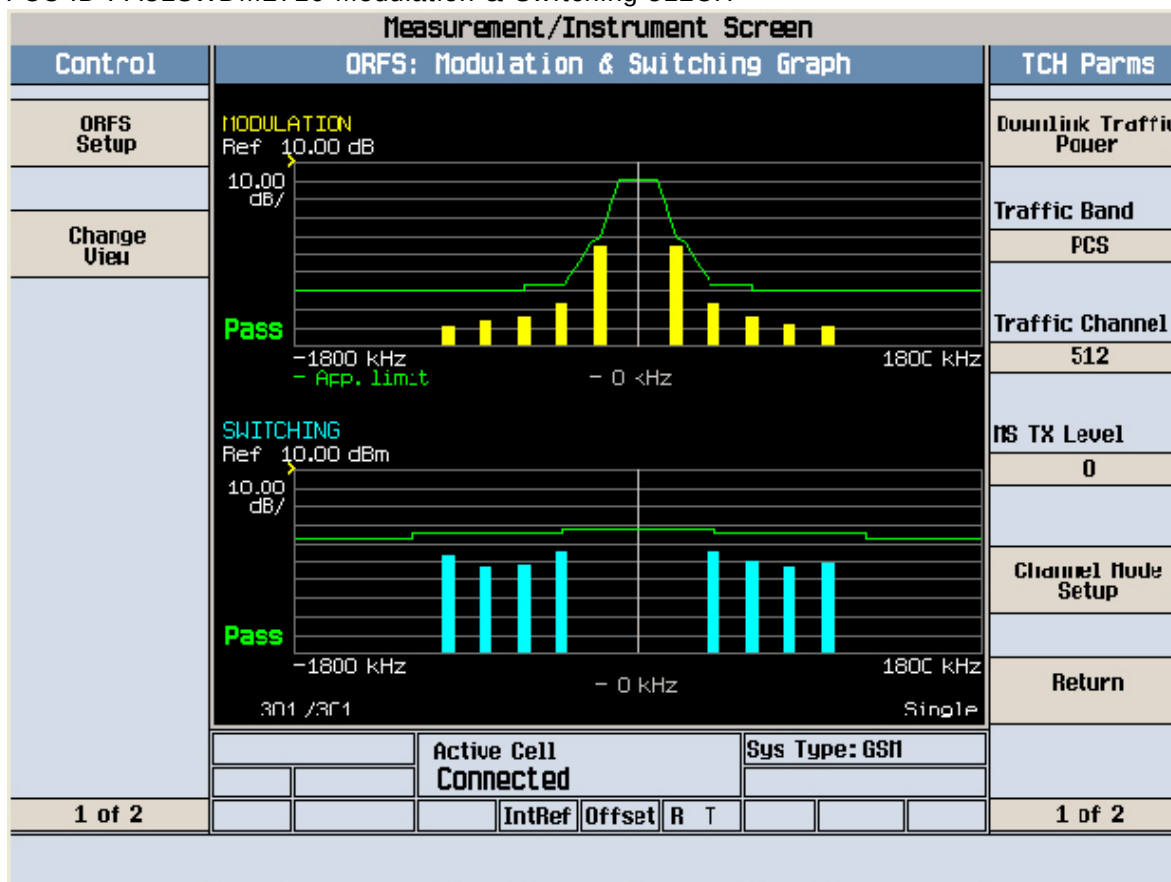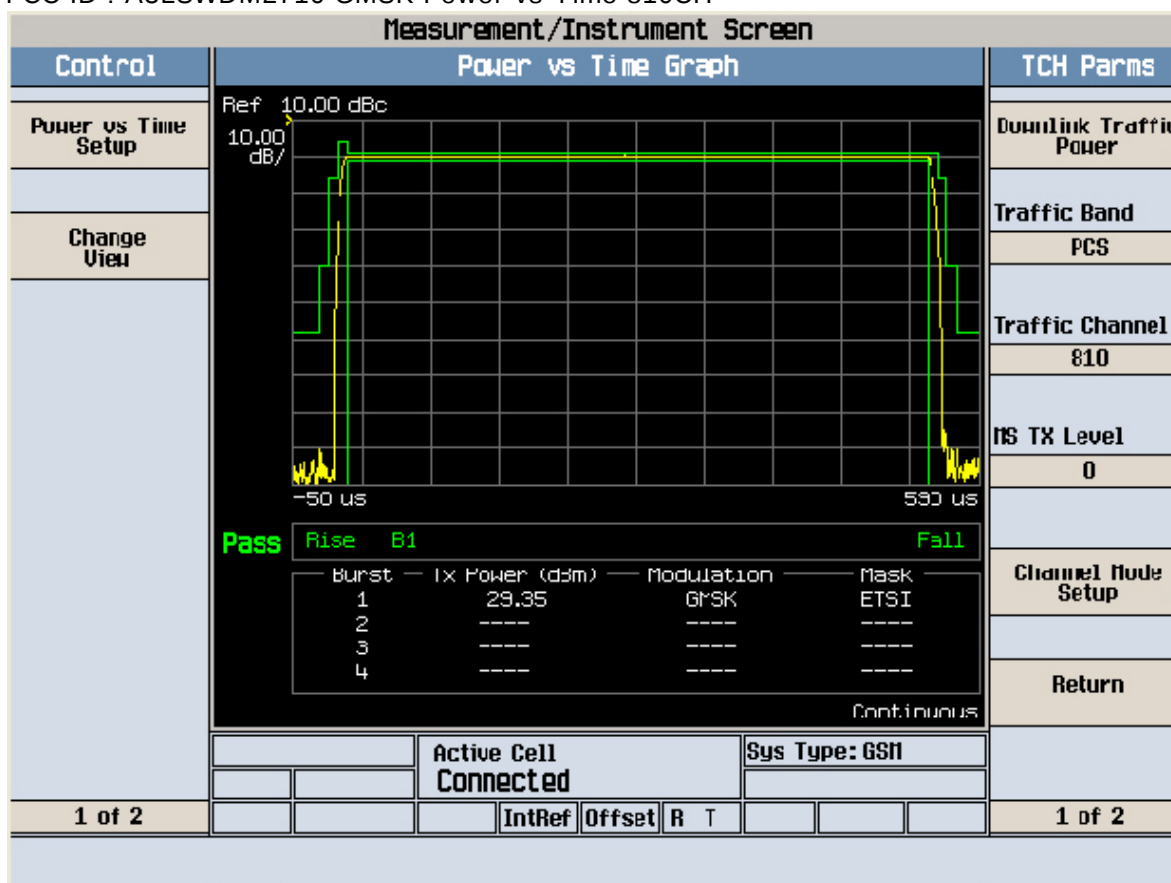

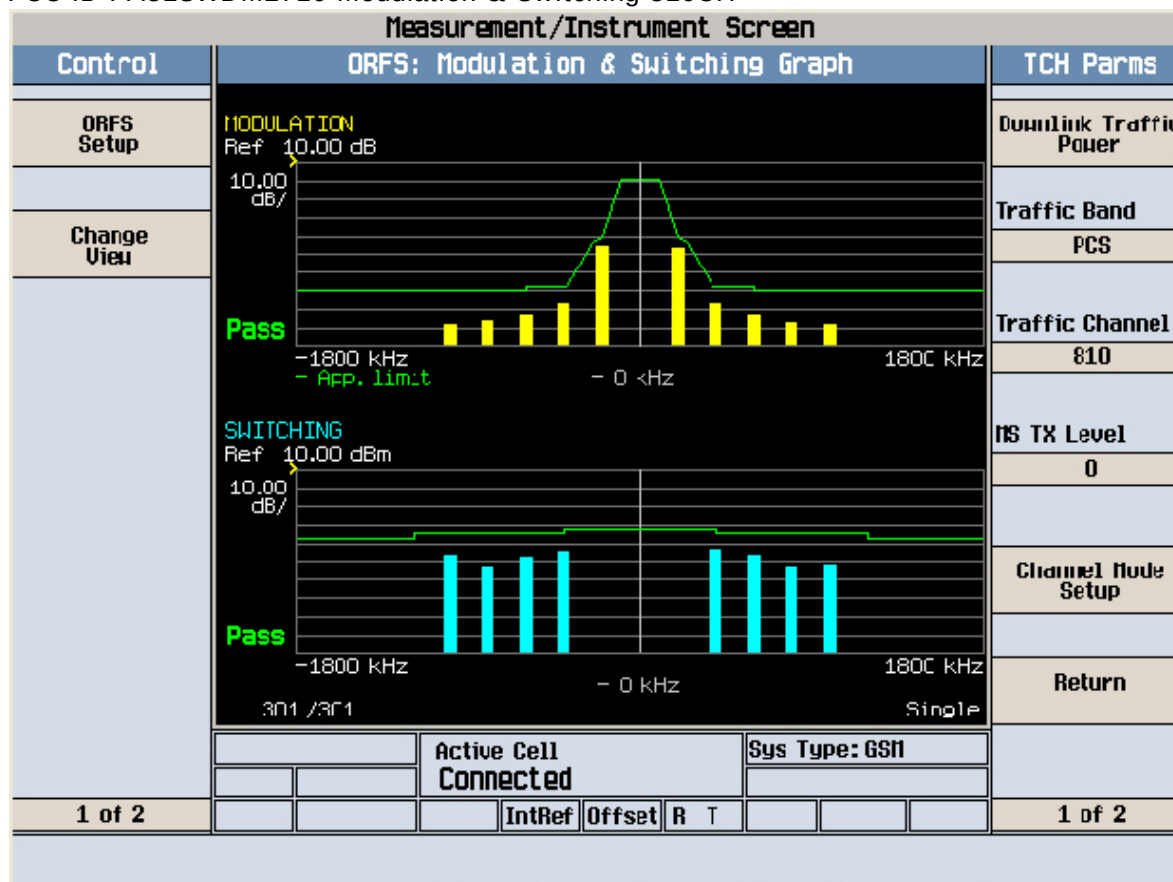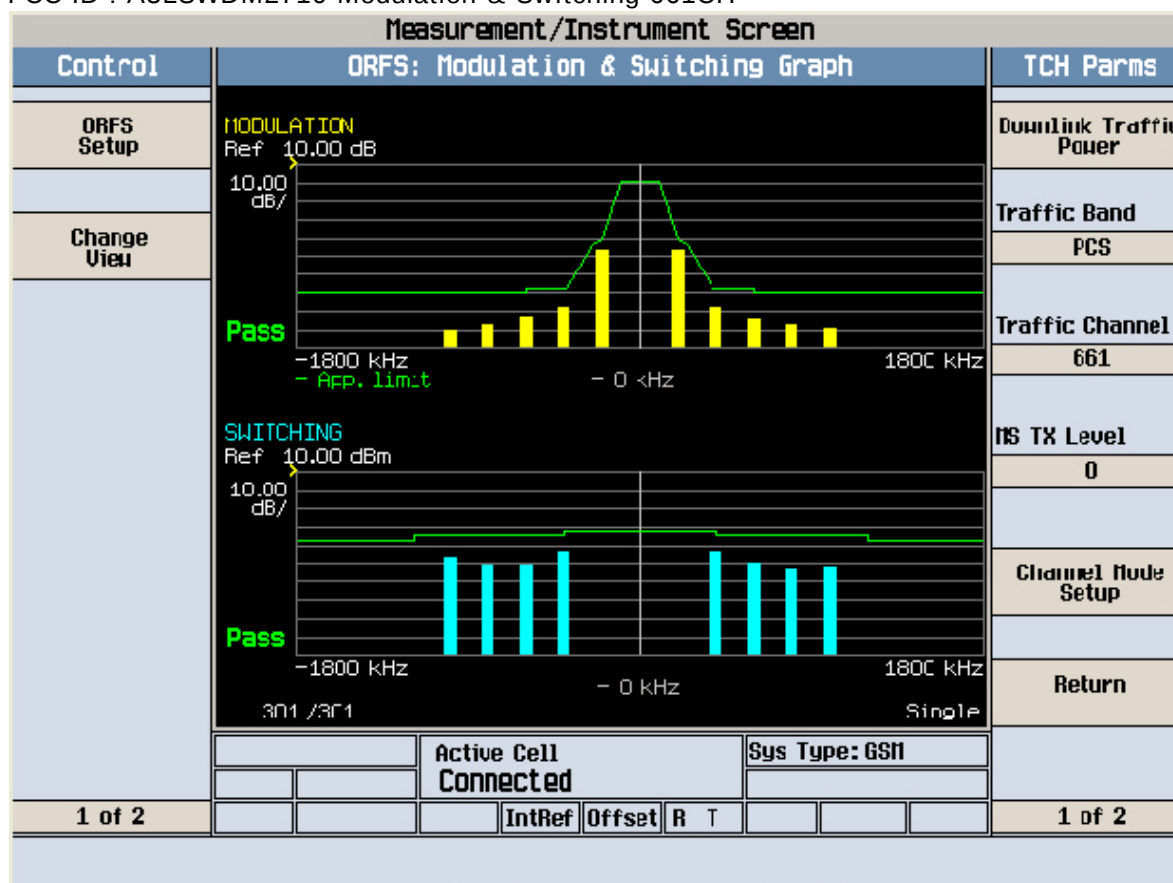

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.512

Mkr1 1.097 GHz

Ref 30 dBm

Atten 40 dB

-32.05 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

926.350000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.84270000 GHz

CF Step

183.270000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 926 MHz



Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

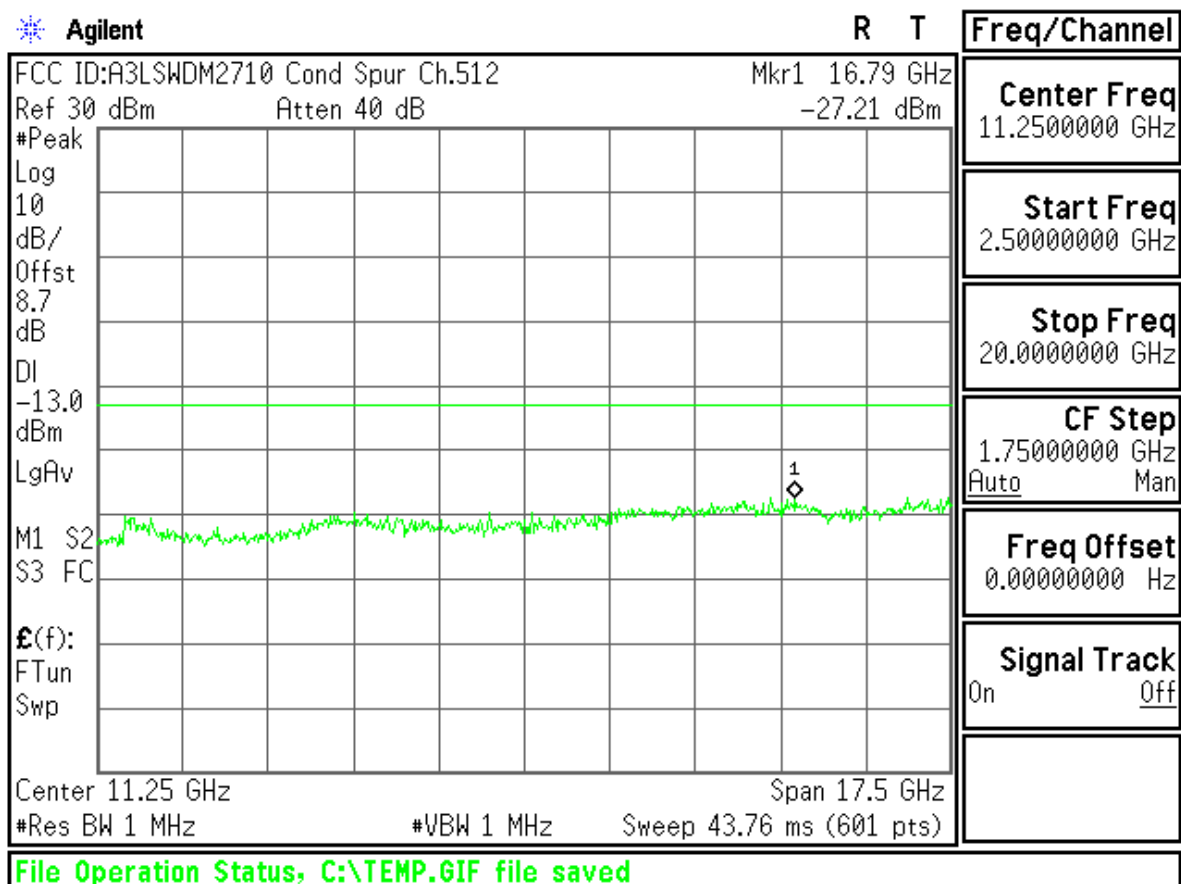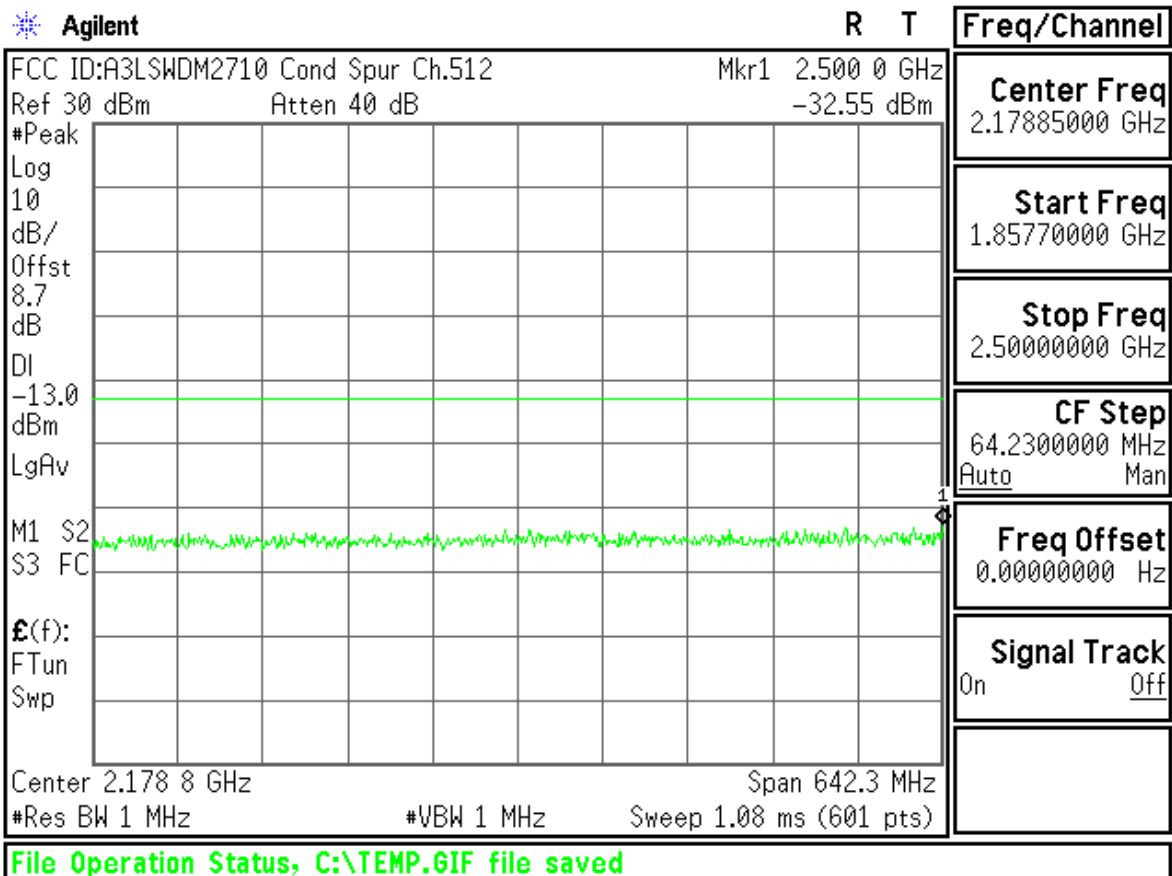

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.661

Mkr1 1.674 GHz

Ref 30 dBm

Atten 40 dB

-33.01 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

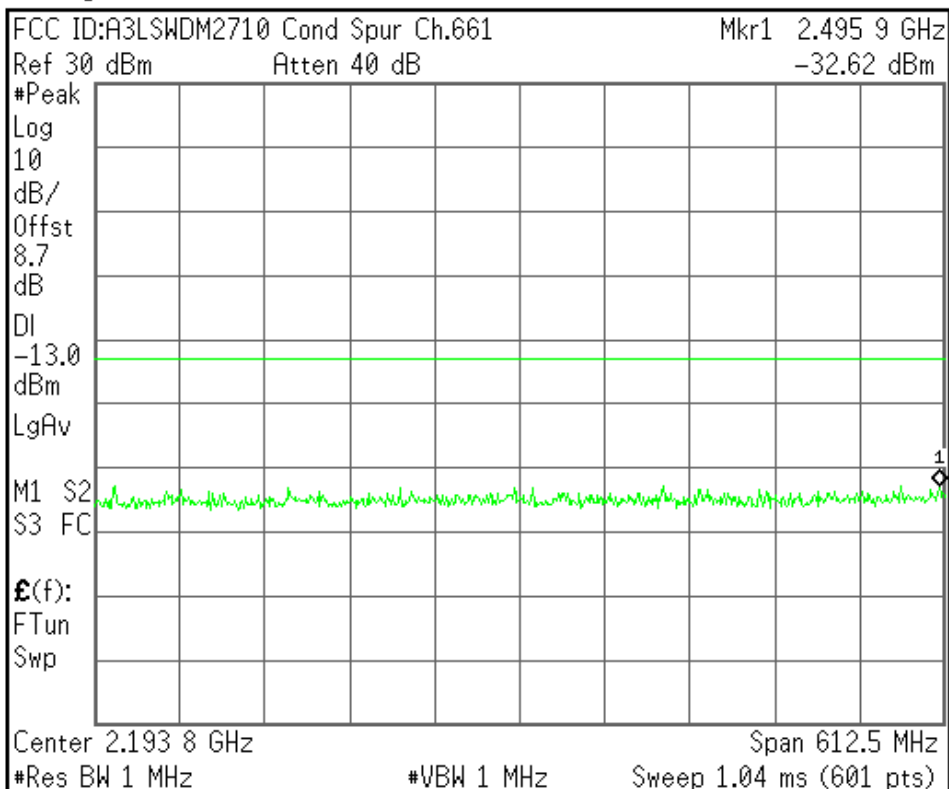

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

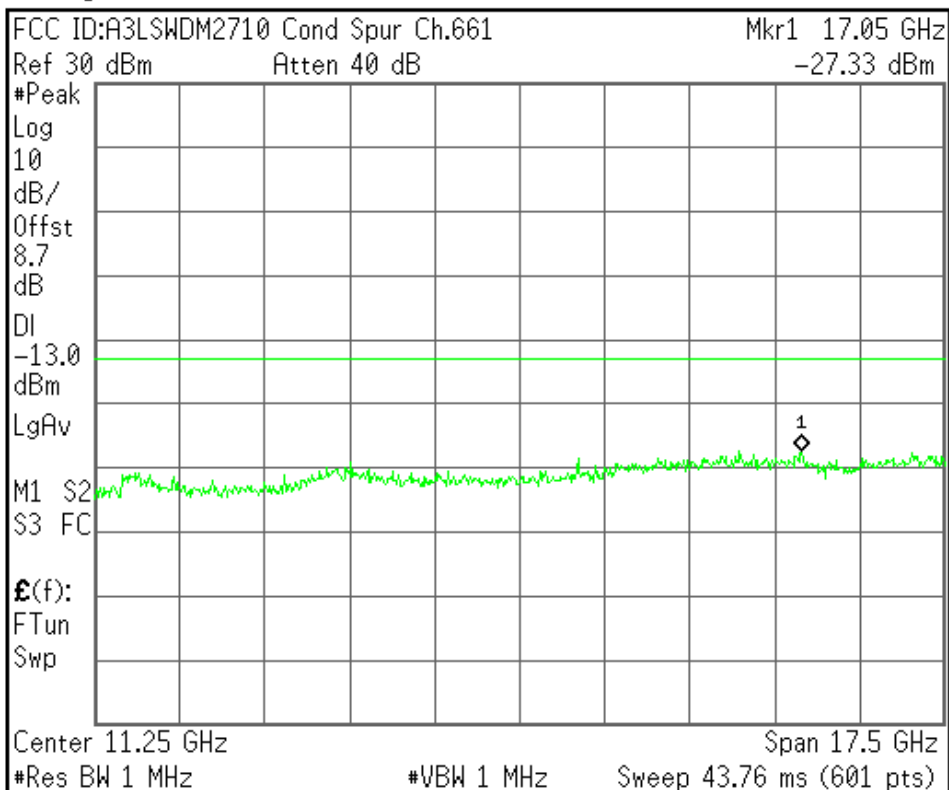

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Cond Spur Ch.810

Mkr1 411 MHz

Ref 30 dBm

Atten 40 dB

-32.29 dBm

#Peak

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

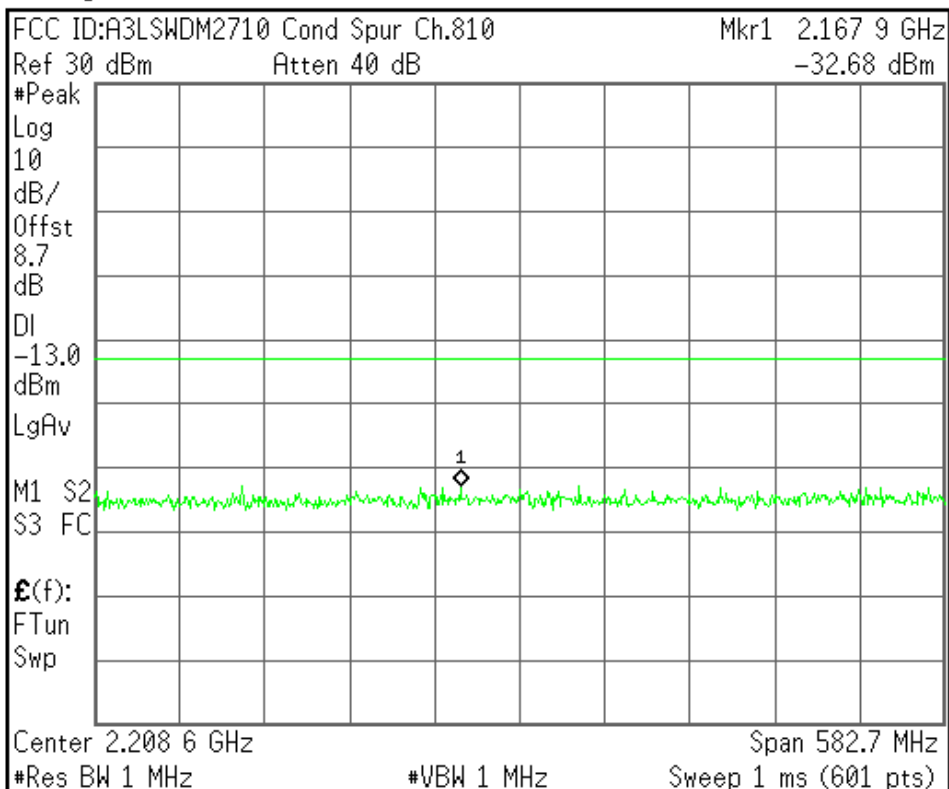

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

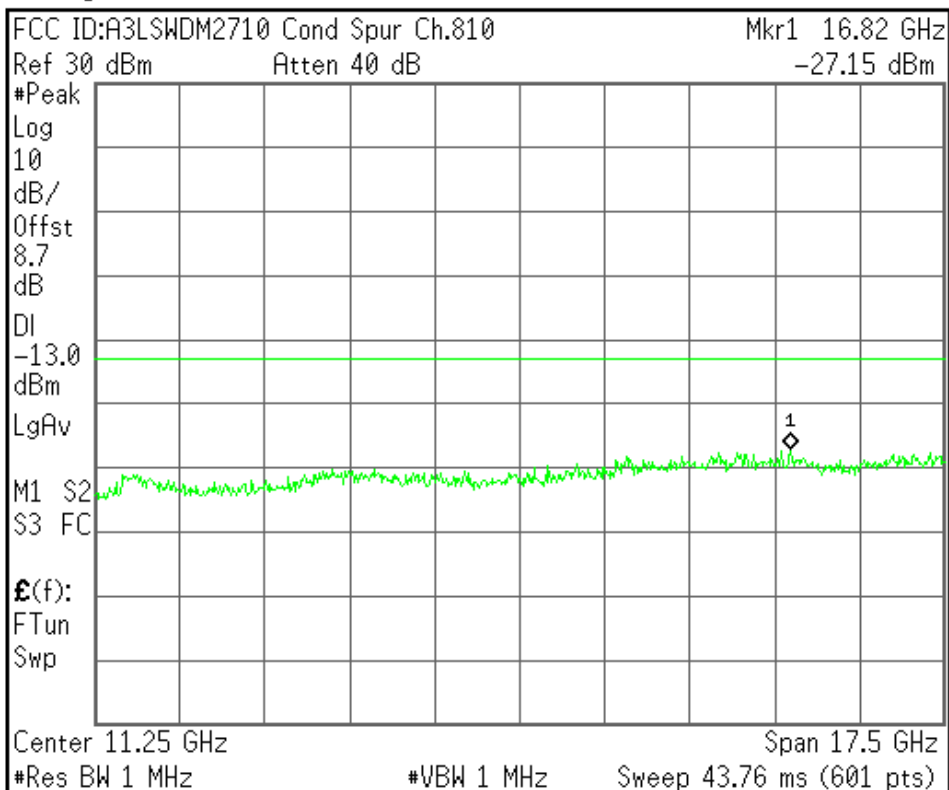

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

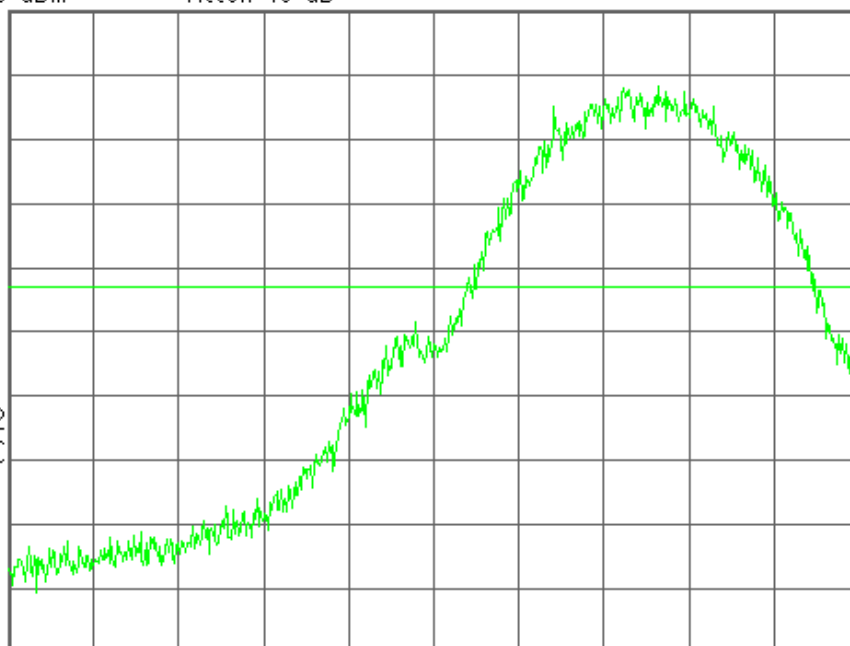

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.512

Mkr1 1.849 978 6 GHz

Ref 30 dBm

Atten 40 dB

-17.72 dBm

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

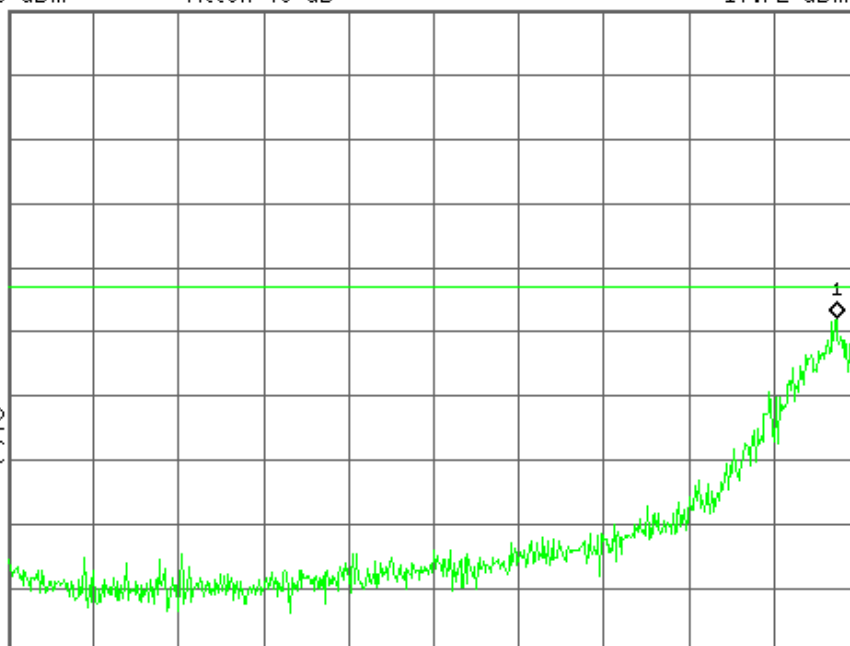

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

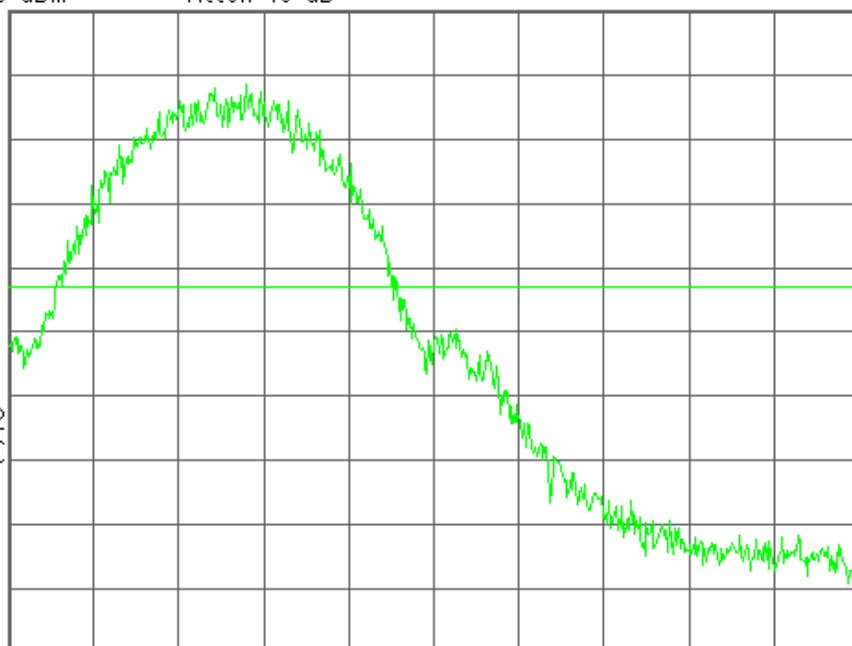

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM2710 Band Edge Ch.810

Mkr1 1.910 014 8 GHz

Ref 30 dBm

Atten 40 dB

-19.58 dBm

#Avg

Log

10

dB/

Offst

8.7

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

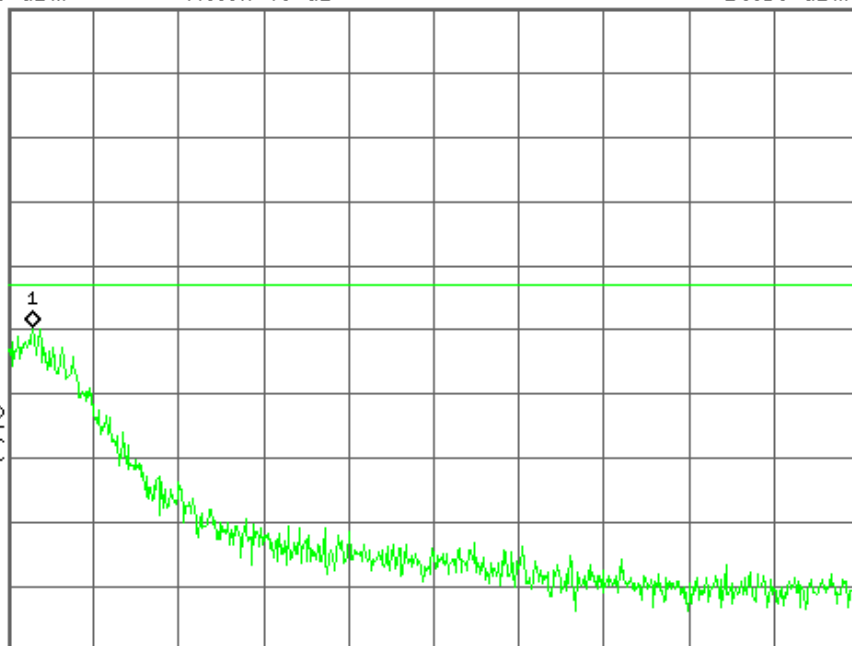

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

FCC ID:A3LSWDM2710 P.A.R Ch.661

▲ Mkr1 0 Hz

Ref 35 dBm

Atten 40 dB

-0.04 dB

#Avg

Log

10

dB/

Offst

8.7

dB

#LgAv

V1 V2

S3 FC

£(f):

FTun

Swp

Center 1.880 000 GHz

Span 5 MHz

#Res BW 3 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies