



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : **M8800**
FCC ID(Requested) : **A3LSWDM8800**
Report No : **FF-180-R1**
Job No : **FF-180**
Date issued : **September 01, 2008**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

JH WOO – Test Engineer

Authorized By

WT JANG – Technical
Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Effective Radiated Power (E.R.P.)	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph	21
6.7.3. GSM1900 Frequency Stability Table	23
6.7.4. GSM1900 Frequency Stability Graph	24
7. CONCLUSION	26
8. TEST PLOTS	27



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSWDM8800
- Quantity : Quantity production is planned
- Emission Designators : 249KGXW(GSM850), 244KG7W(GSM850 EDGE)
251KGXW(GSM1900), 246KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.428 W ERP GSM850 (26.31 dBm)
0.906 W EIRP GSM1900 (29.57 dBm)
0.217 W ERP GSM850 EDGE(23.37dBm)
0.525 W EIRP GSM1900 EDGE(27.20dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : August 26-28, 2008
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FF-180-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2008-10-17
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000233	2009-07-24
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2009-06-20
Power Sensor	8485A	3318A19924	2008-10-01
Power Meter	E4419B	GB41293846	2008-09-06
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	MY47510060	2009-03-03
	8960	GB42230535	2009-01-02
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
Communication test set	CMU200	109162	2008-10-17
Receive Antenna	HL040	353255/019	2009-10-29
Power Supply	E3640A	MY40003594	2009-06-20
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2008-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

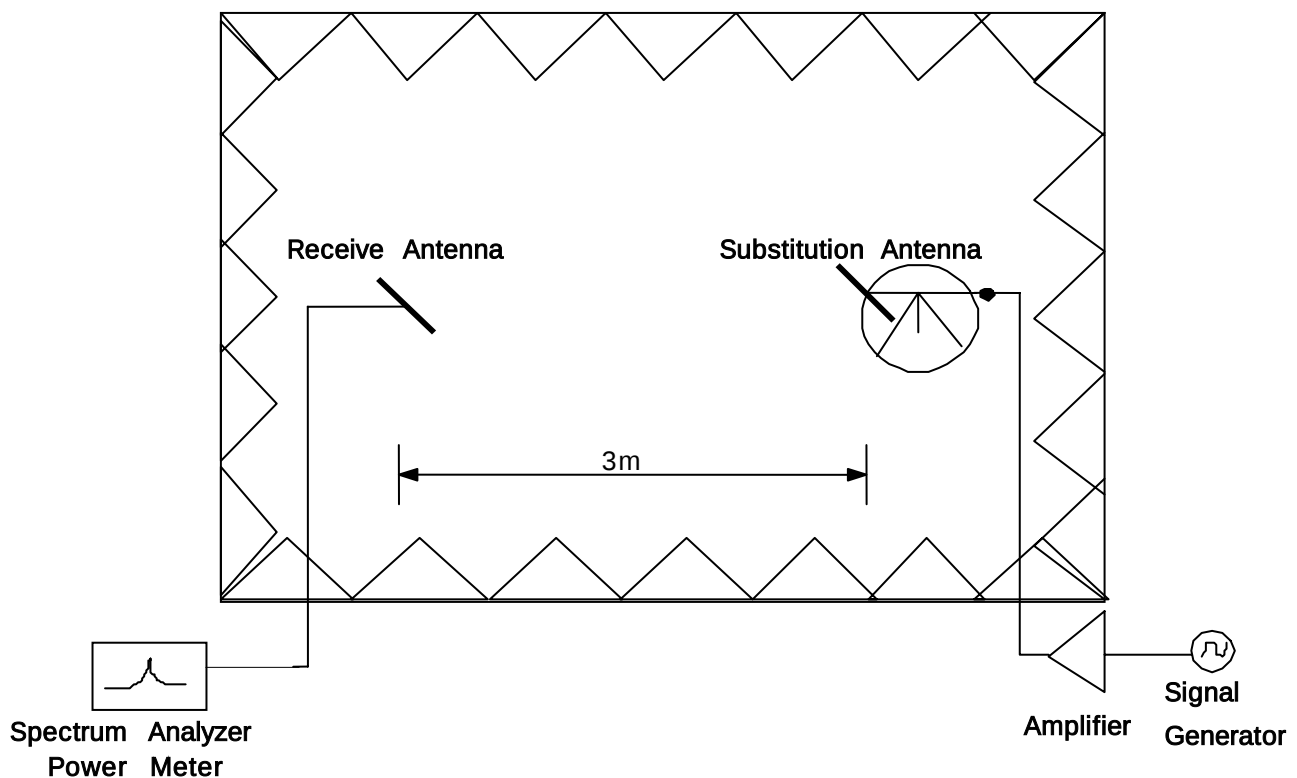


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004



Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4.Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.428 \text{ W}) = 39.31 \text{ dB}$$

$$26.31 \text{ dBm} - 39.31 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	25.00	H	-11.74	-0.67	-11.07
		V	-12.05	-0.67	-11.38
836.60	26.00	H	-10.89	-0.73	-10.16
		V	-10.93	-0.73	-10.20
848.80	26.00	H	-12.56	-0.79	-11.77
		V	-11.66	-0.79	-10.87

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-11.51	H	283/80	24.56	0.286	Standard
836.60	-10.64	H	284/90	25.52	0.356	Standard
848.80	-11.46	H	284/80	26.31	0.428	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-14.42	H	285/81	23.37	0.217	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	28.00	H	-10.70	9.70	-20.40
		V	-10.72	9.70	-20.42
1880.00	30.00	H	-8.85	9.70	-18.55
		V	-8.83	9.70	-18.53
1909.80	29.00	H	-10.41	9.70	-20.11
		V	-10.08	9.70	-19.78

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-20.78	V	328/120	27.64	0.581	Standard
1880.00	-18.96	V	336/120	29.57	0.906	Standard
1909.80	-19.67	H	94/0	29.44	0.879	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1880.00	-21.33	V	337/118	27.20	0.525	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 26.31 dBm = 0.428 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 39.31 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
128	2	1648.40	-55.53	70.67	H
	3	2472.60	-53.88	63.93	H
	4	3296.80	-67.44	73.98	H
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-55.67	69.91	H
	3	2509.80	-52.14	62.38	H
	4	3346.40	-67.42	74.26	V
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-55.98	70.06	V
	3	2546.40	-55.95	66.02	V
	4	3395.20	-67.76	74.35	V
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.57 dBm = 0.906 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 42.57$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
512	2	3700.40	-61.72	67.55	V
	3	5550.60	-63.09	64.19	H
	4	7400.80	-64.74	61.86	V
	5	9251.00	-62.01	52.63	H
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-62.14	67.62	V
	3	5640.00	-64.31	65.02	V
	4	7520.00	-65.33	62.11	V
	5	9400.00	-63.58	55.42	V
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-62.00	66.56	V
	3	5729.40	-65.31	65.88	V
	4	7639.20	-65.54	61.53	V
	5	9549.00	-63.98	56.11	V
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2008. 08. 28

Test Engineer : JH WOO

Tx Cable loss
Tx Horn Ant Gain
Tx Level to radiate -13dBm
ESI Level received from Tx with -13dBm
Tested Level from EUT
= ERP+2.14 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-8.82	9.50	-13.70	-25.78	-25.24	-55.53	-55.71	70.67	71.34
	3	2472.60	-11.14	10.70	-12.60	-30.65	-30.96	-53.88	-58.21	63.93	68.12
	4	3296.80	-13.37	12.30	-11.90	-34.30	-34.88	-67.44	-67.47	74.32	73.98
	5	4121.00	-14.90	12.50	-10.60	-37.37	-37.16	-	-	-	-
	6	4945.20	-16.77	12.70	-8.90	-39.95	-40.17	-	-	-	-
	7	5769.40	-18.24	12.90	-7.70	-42.25	-42.16	-	-	-	-
190	2	1673.20	-8.89	9.50	-13.60	-26.45	-26.15	-55.67	-55.78	69.91	70.33
	3	2509.80	-11.30	10.70	-12.40	-30.90	-30.96	-52.14	-57.23	62.38	67.39
	4	3346.40	-13.23	12.30	-12.10	-34.28	-34.36	-67.47	-67.42	74.26	74.29
	5	4183.00	-15.03	12.50	-10.50	-36.90	-37.13	-	-	-	-
	6	5019.60	-17.37	12.70	-8.30	-40.04	-40.64	-	-	-	-
	7	5856.20	-18.51	12.90	-7.40	-42.75	-42.94	-	-	-	-
251	2	1697.60	-8.86	9.50	-13.60	-26.64	-26.78	-57.53	-55.98	71.62	70.06
	3	2546.40	-11.34	10.70	-12.40	-30.32	-30.81	-57.94	-55.95	68.35	66.02
	4	3395.20	-13.31	12.30	-12.00	-34.25	-34.55	-68.03	-67.76	74.91	74.35
	5	4244.00	-15.10	12.50	-10.40	-37.07	-37.26	-	-	-	-
	6	5092.80	-17.35	12.70	-8.40	-40.12	-40.75	-	-	-	-
	7	5941.60	-18.38	12.90	-7.50	-43.10	-42.67	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2008. 08. 28

Test Engineer : JH WOO

Tx Cable loss
Tx Horn Ant Gain
Tx Level to radiate -13dBm
ESI Level received from Tx with -13dBm
Tested Level from EUT
= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : H dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-13.91	12.40	-11.50	-36.82	-36.64	-62.62	-61.72	68.27	67.55
	3	5550.60	-18.04	12.90	-7.90	-41.37	-41.37	-63.09	-63.48	64.19	64.58
	4	7400.80	-20.27	10.50	-3.20	-45.94	-45.35	-66.63	-64.74	63.16	61.86
	5	9251.00	-23.06	11.20	-1.10	-51.85	-49.57	-62.01	-64.26	52.63	57.16
	6	11101.20	-25.92	11.60	1.30	-54.92	-54.59	-	-	-	-
	7	12951.40	-28.16	12.90	2.30	-56.76	-56.49	-	-	-	-
661	2	3760.00	-14.05	12.40	-11.40	-37.50	-36.99	-65.94	-62.14	70.91	67.62
	3	5640.00	-18.03	12.90	-7.90	-41.30	-41.76	-65.45	-64.31	66.62	65.02
	4	7520.00	-20.41	10.60	-3.20	-45.54	-45.69	-67.50	-65.33	64.43	62.11
	5	9400.00	-22.44	11.60	-2.20	-51.20	-50.63	-67.37	-63.58	58.64	55.42
	6	11280.00	-26.22	12.10	1.10	-54.35	-54.25	-	-	-	-
	7	13160.00	-27.70	12.80	1.90	-57.39	-57.52	-	-	-	-
810	2	3819.60	-14.59	12.40	-10.80	-37.15	-37.91	-65.95	-62.00	71.27	66.56
	3	5729.40	-18.34	13.00	-7.70	-41.97	-41.90	-66.22	-65.31	66.72	65.88
	4	7639.20	-20.39	11.20	-3.80	-46.12	-46.48	-68.05	-65.54	64.40	61.53
	5	9549.00	-23.07	11.70	-1.60	-50.91	-50.34	-67.19	-63.98	58.75	56.11
	6	11458.80	-26.21	11.70	1.50	-54.31	-54.64	-	-	-	-
	7	13368.60	-27.83	12.30	2.50	-58.60	-58.83	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	24.00	836,600,024	0.000003	0.029
100%		-30	22.13	836,600,022	0.000003	0.026
100%		-20	-31.63	836,599,968	-0.000004	-0.038
100%		-10	-19.39	836,599,981	-0.000002	-0.023
100%		0	23.31	836,600,023	0.000003	0.028
100%		+10	31.63	836,600,032	0.000004	0.038
100%		+20	24.00	836,600,024	0.000003	0.029
100%		+30	27.14	836,600,027	0.000003	0.032
100%		+40	-24.57	836,599,975	-0.000003	-0.029
100%		+50	-34.82	836,599,965	-0.000004	-0.042
100%		+60	32.08	836,600,032	0.000004	0.038
85%	3.35	+20	18.68	836,600,019	0.000002	0.022
115%	4.26	+20	19.59	836,600,020	0.000002	0.023
Batt.Endpoint	3.35	+20	18.68	836,600,019	0.000002	0.022


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

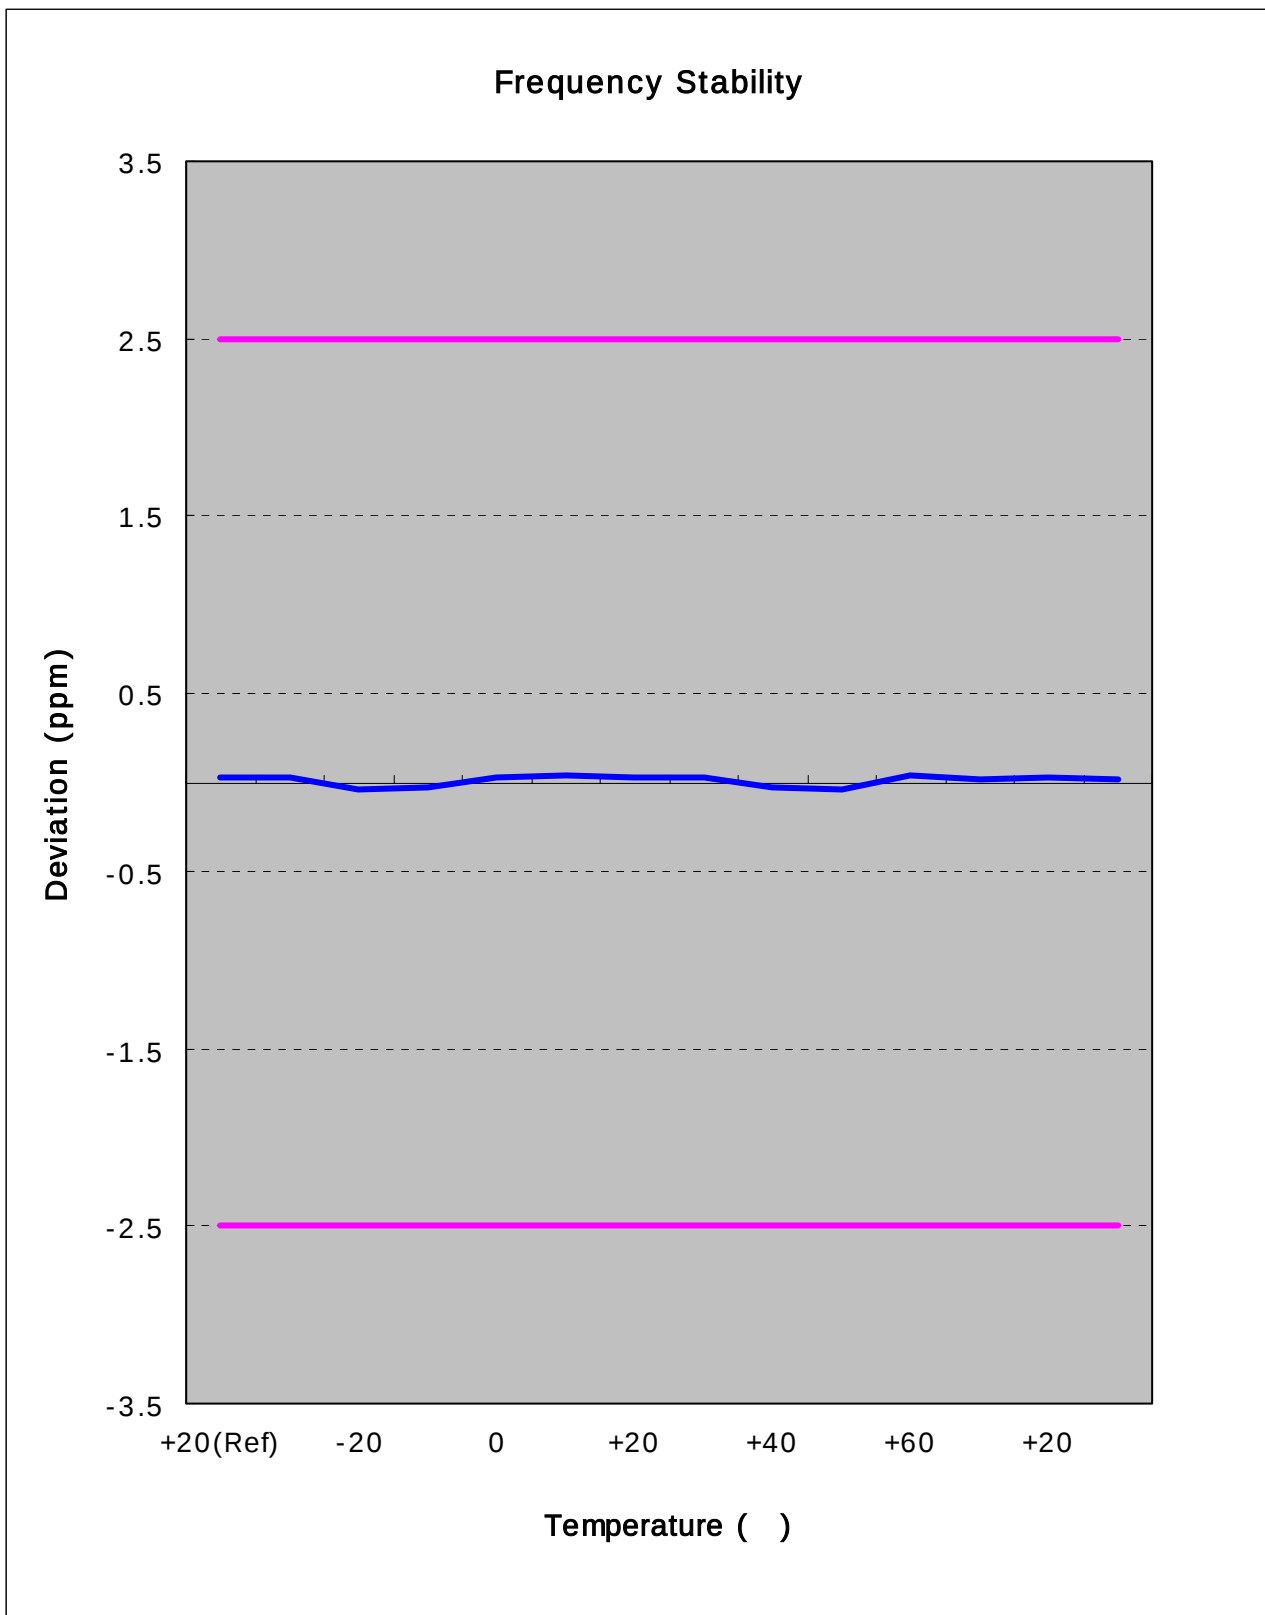

Zoom IN

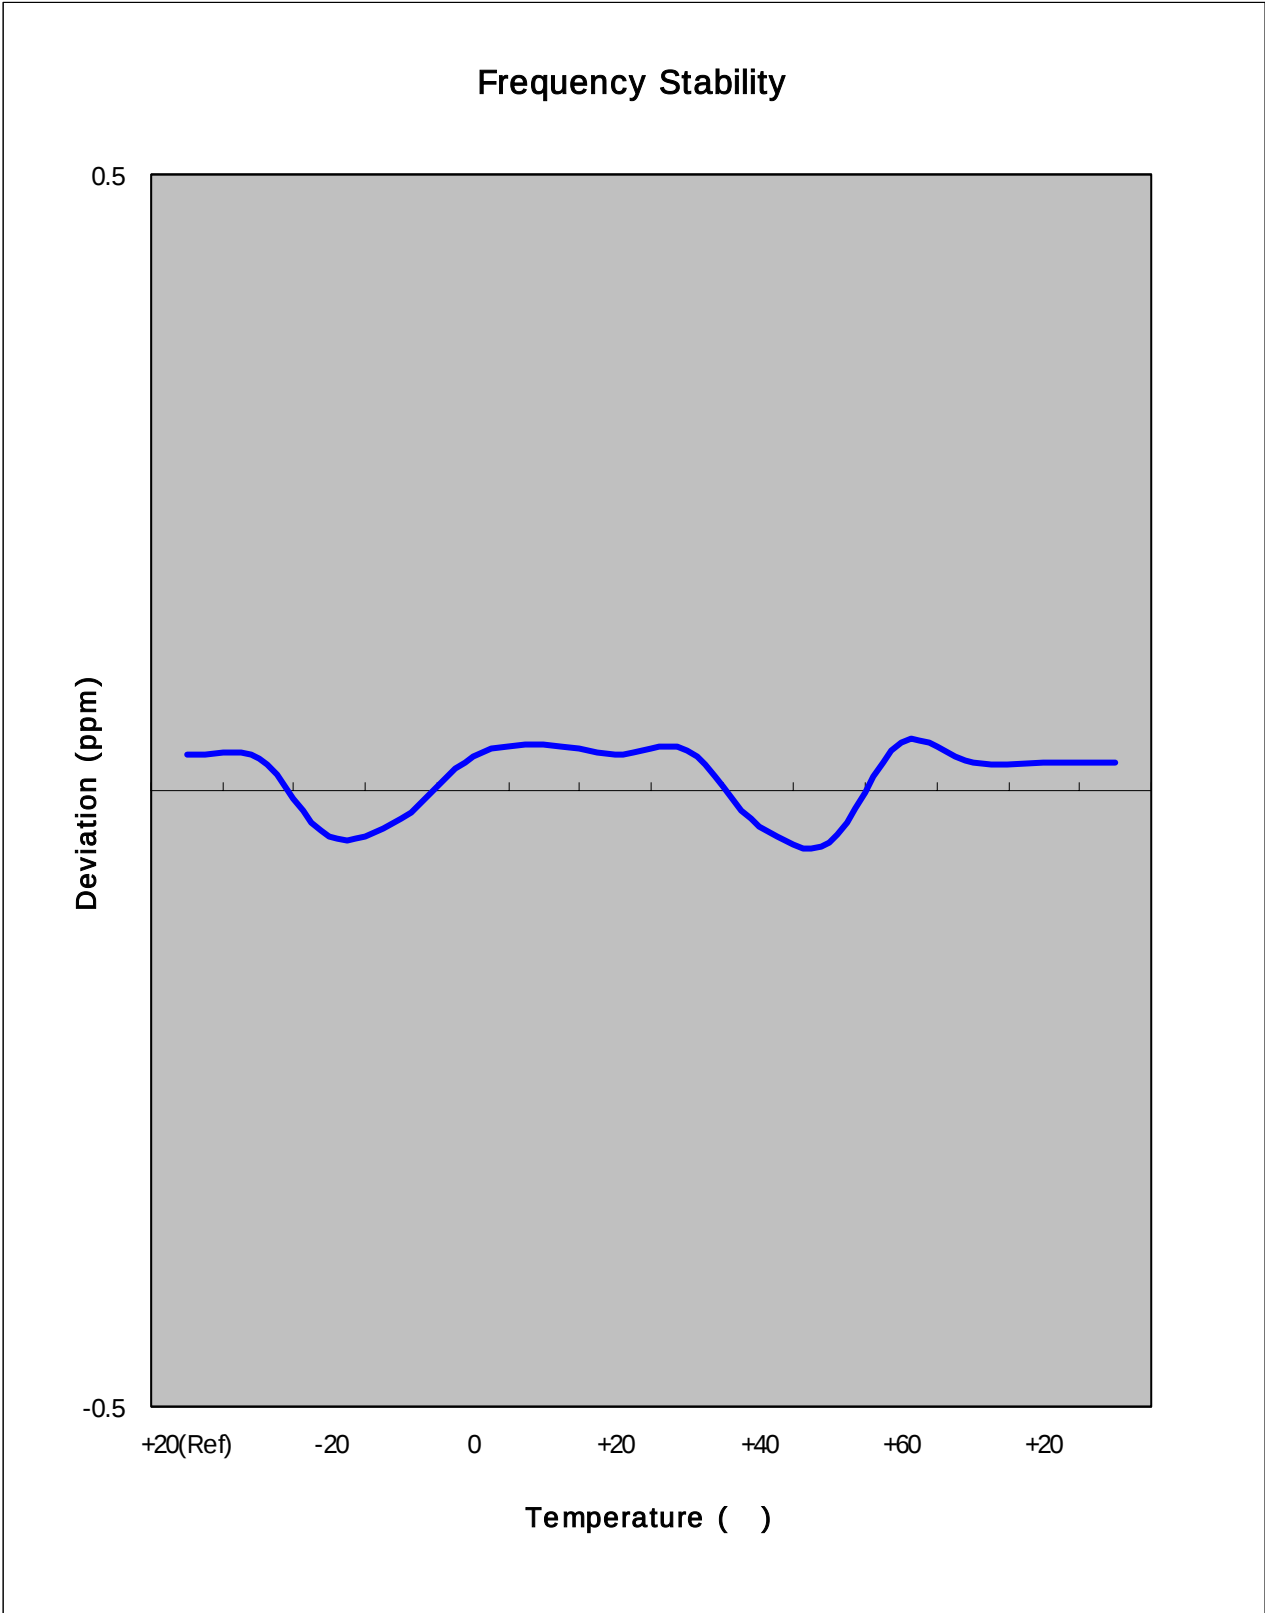

6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	17.00	1,880,000,017	0.000001	0.009
100%		-30	-26.50	1,879,999,973	-0.000001	-0.014
100%		-20	-21.19	1,879,999,979	-0.000001	-0.011
100%		-10	20.11	1,880,000,020	0.000001	0.011
100%		0	-17.50	1,879,999,982	-0.000001	-0.009
100%		+10	-37.55	1,879,999,962	-0.000002	-0.020
100%		+20	17.00	1,880,000,017	0.000001	0.009
100%		+30	-19.36	1,879,999,981	-0.000001	-0.010
100%		+40	-12.61	1,879,999,987	-0.000001	-0.007
100%		+50	-21.00	1,879,999,979	-0.000001	-0.011
100%		+60	31.31	1,880,000,031	0.000002	0.017
85%	3.35	+20	-23.90	1,879,999,976	-0.000001	-0.013
115%	4.26	+20	21.65	1,880,000,022	0.000001	0.012
Batt.Endpoint	3.35	+20	-23.90	1,879,999,976	-0.000001	-0.013


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4. GSM1900 Frequency Stability Graph

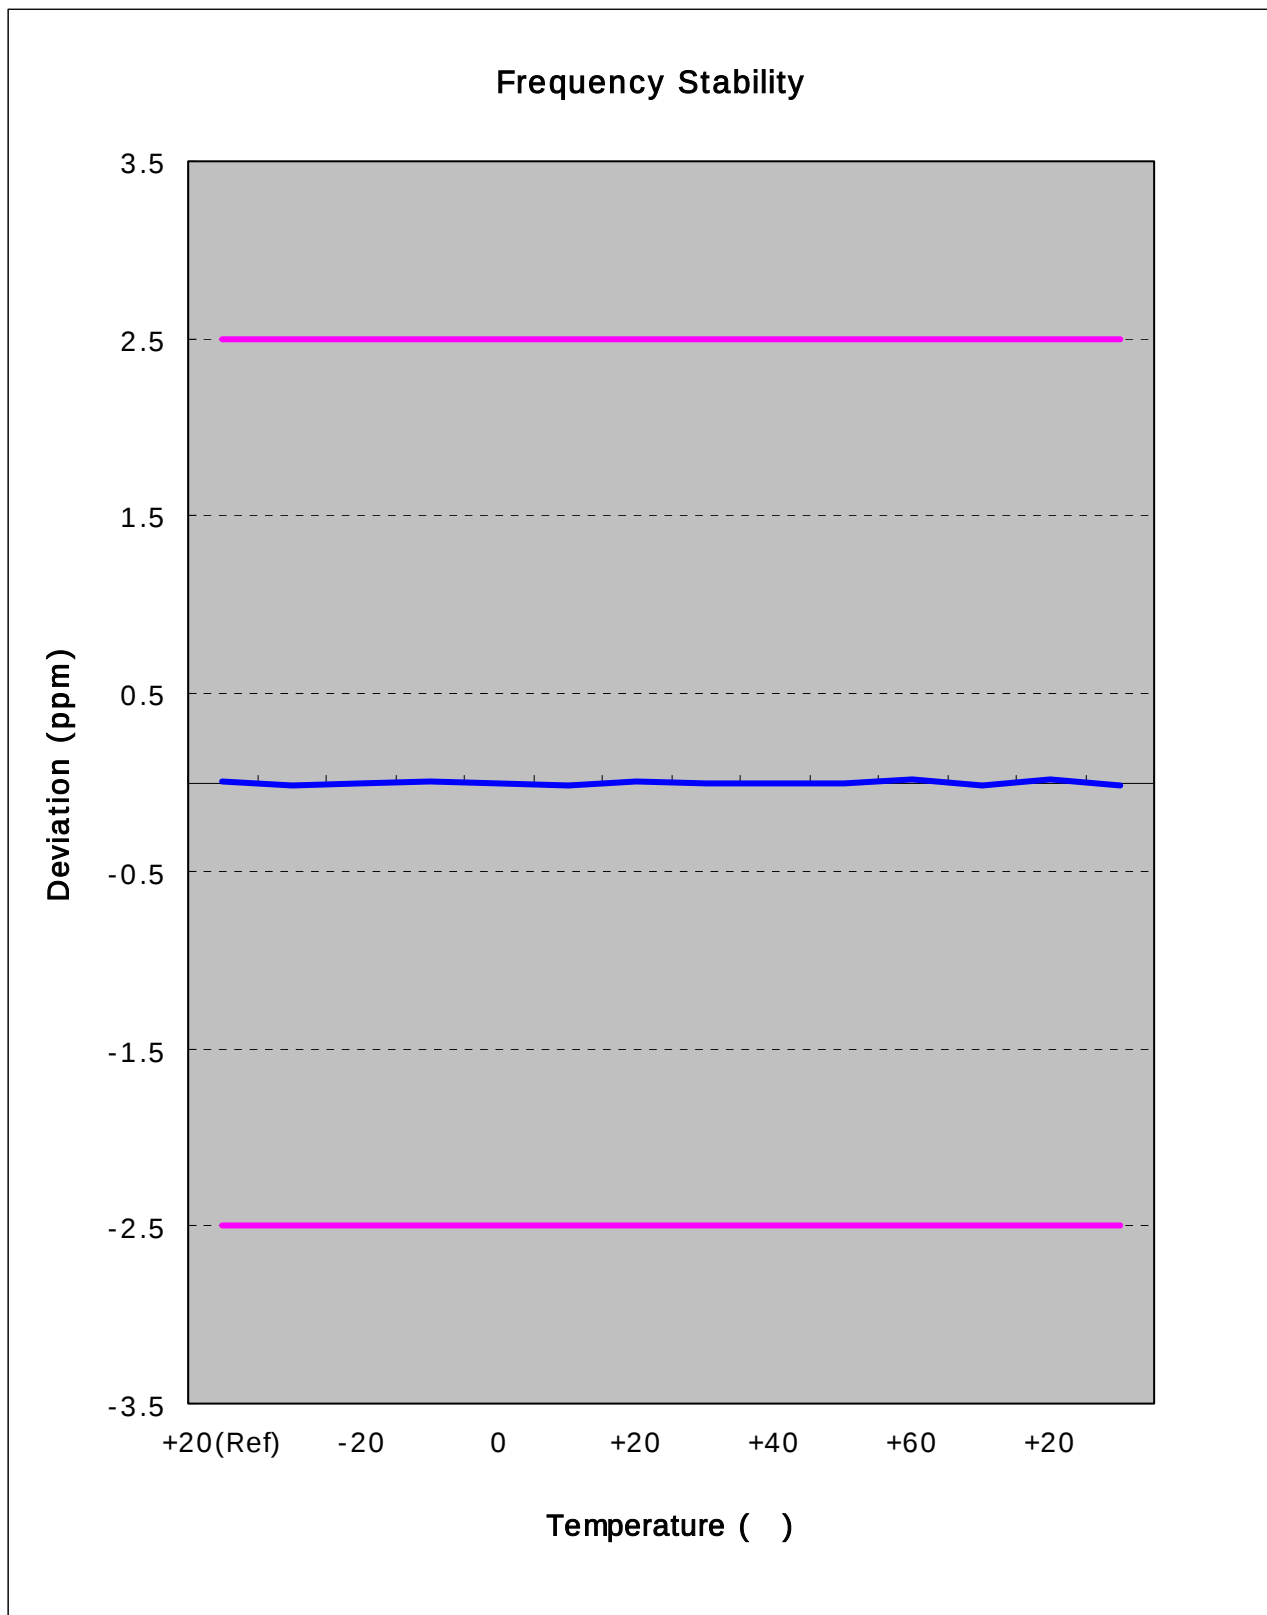

Zoom IN

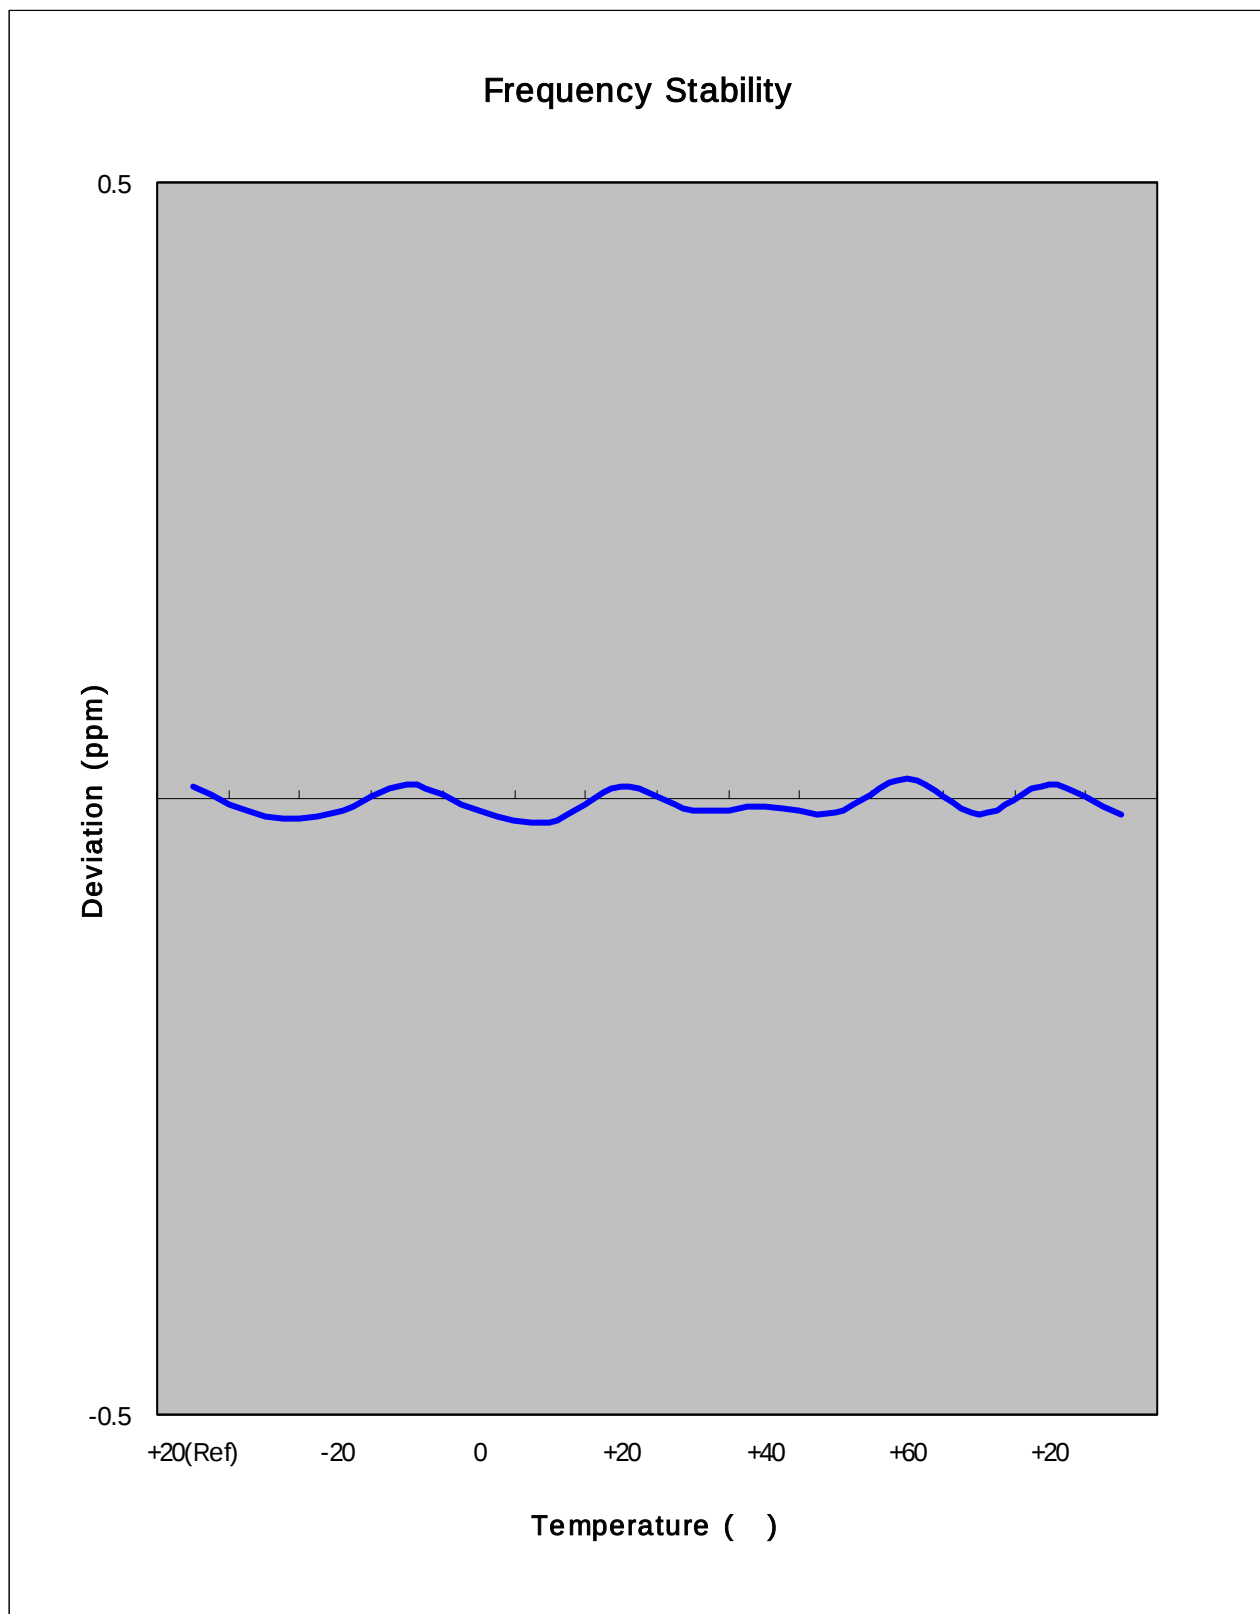



7. CONCLUSION

The data collected shows that the SAMSUNG Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth.

FCC ID : A3LSWDM8800 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS


GSM850



Agilent

R T


Freq/Channel


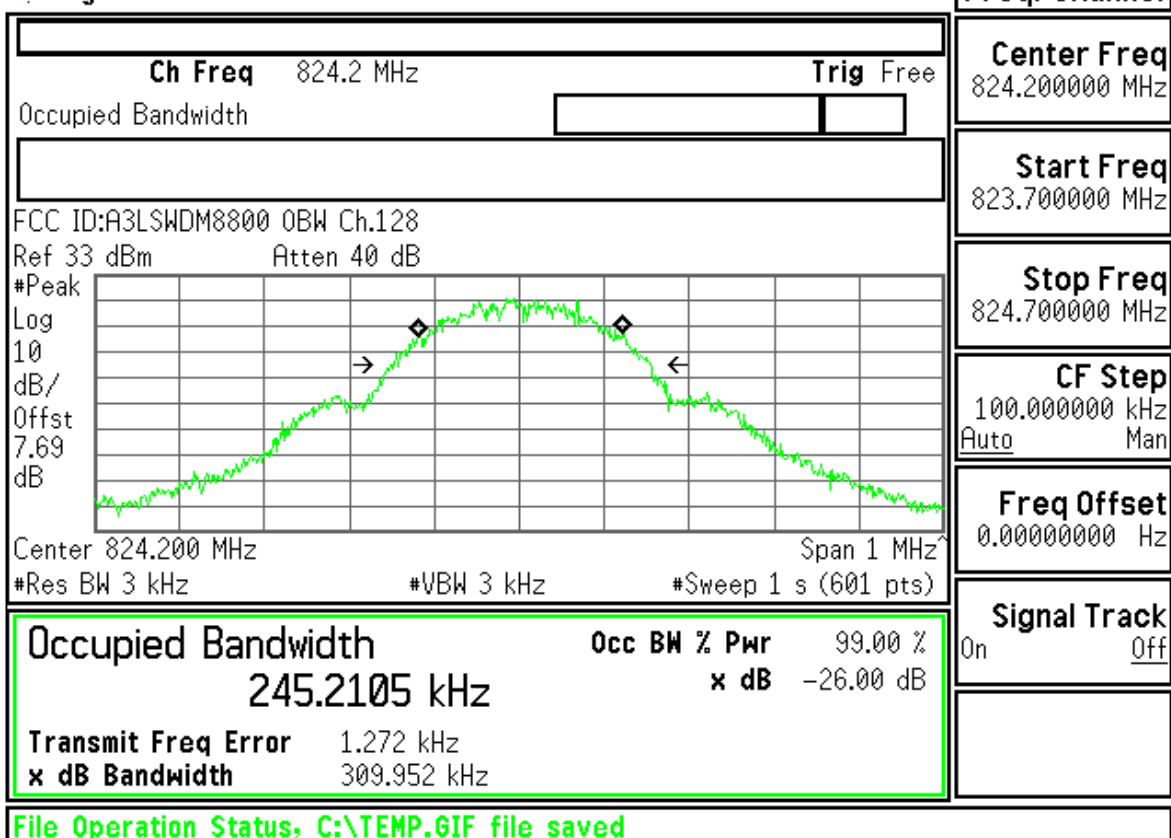
**Center Freq**
824.200000 MHz**Start Freq**
823.700000 MHz**Stop Freq**
824.700000 MHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Agilent

R T

Freq/Channel

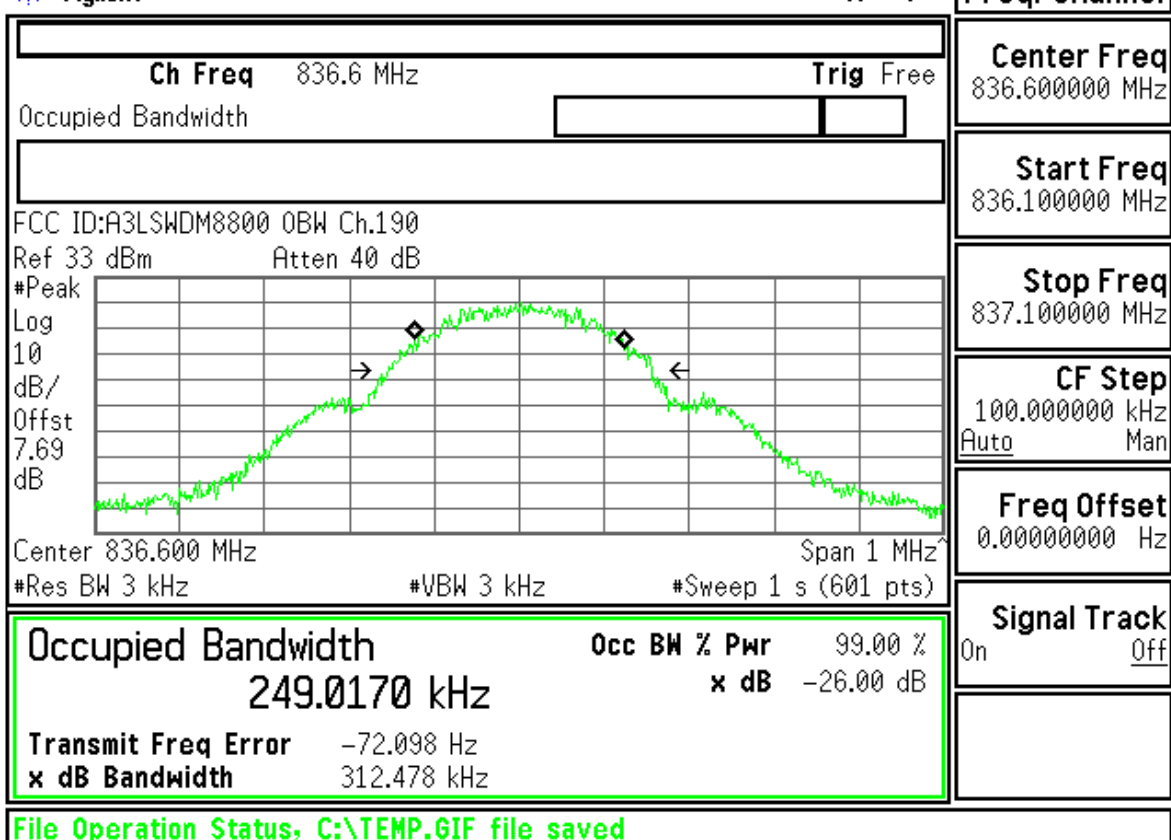**Center Freq**
836.600000 MHz**Start Freq**
836.100000 MHz**Stop Freq**
837.100000 MHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

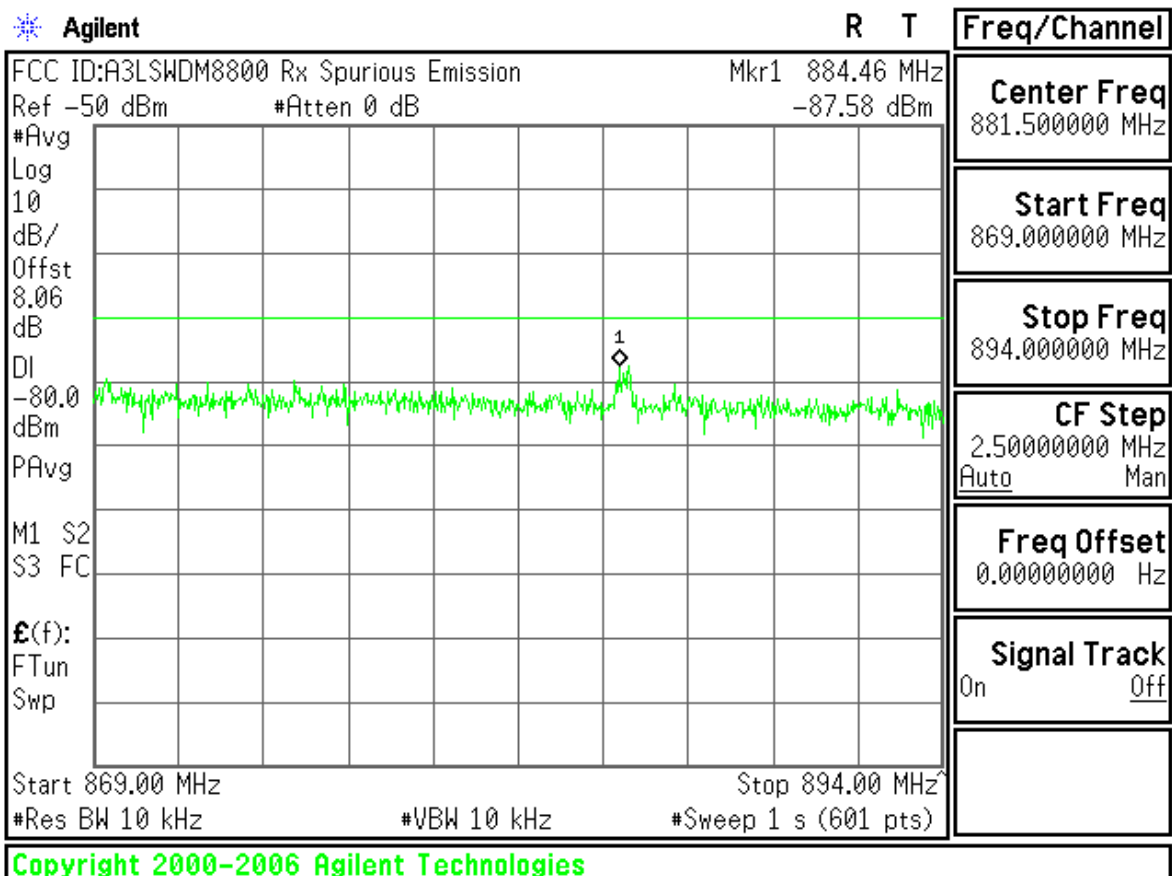
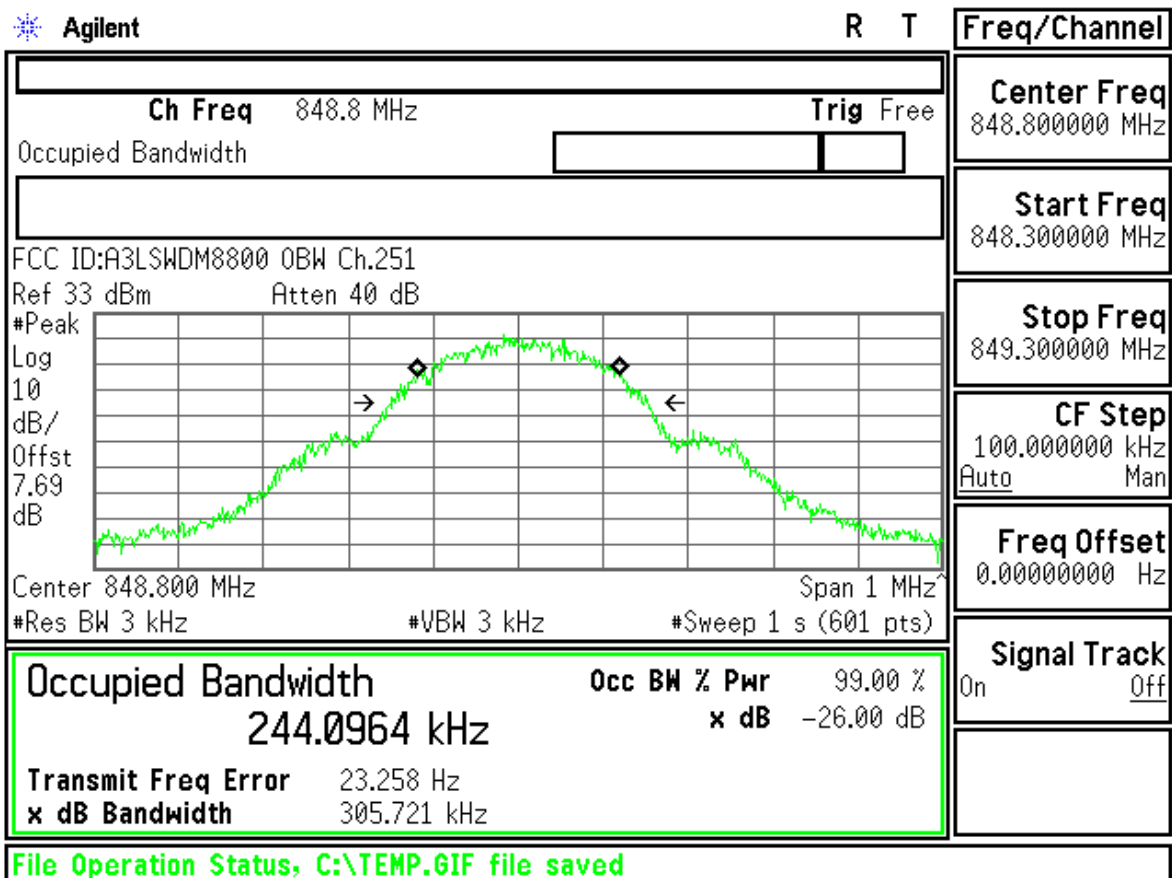




Control	Transmit Power								TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.46</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.46</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.46	----	----	----	Estimated Carrier Power	32.46	----	----	----	Downlink Traffic Power ▾						
										Burst 1	Burst 2	Burst 3	Burst 4																	
									Burst Power	32.46	----	----	----																	
									Estimated Carrier Power	32.46	----	----	----																	
	Traffic Band																													
	GS1850																													
	Traffic Channel																													
	128																													
	MS TX Level																													
	5																													
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.26</td> <td>0.92</td> <td>-19.99</td> </tr> <tr> <td>Maximum</td> <td>4.68</td> <td>1.22</td> <td>-4.77</td> </tr> <tr> <td>Average</td> <td>3.58</td> <td>1.09</td> <td>-13.18</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.26	0.92	-19.99	Maximum	4.68	1.22	-4.77	Average	3.58	1.09	-13.18	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
										Peak Phase °	RMS Phase °	Frequency Hz																		
									Minimum	2.26	0.92	-19.99																		
									Maximum	4.68	1.22	-4.77																		
	Average	3.58	1.09	-13.18																										
	Pass/Fail	Pass	Pass	Pass																										
	Return																													
	50 / 50																													
	Single																													
	Active Cell Connected								Sys Type: GSM																					
IntRef Offset R T								1 of 2																						
1 of 2								1 of 2																						


Control	Transmit Power								TCH Parms																					
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.30</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.30</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.30	----	----	----	Estimated Carrier Power	32.30	----	----	----	Downlink Traffic Power ▾						
										Burst 1	Burst 2	Burst 3	Burst 4																	
									Burst Power	32.30	----	----	----																	
									Estimated Carrier Power	32.30	----	----	----																	
	Traffic Band																													
	GS1850																													
	Traffic Channel																													
	190																													
	MS TX Level																													
	5																													
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.22</td> <td>0.95</td> <td>-16.10</td> </tr> <tr> <td>Maximum</td> <td>4.77</td> <td>1.20</td> <td>-5.41</td> </tr> <tr> <td>Average</td> <td>3.59</td> <td>1.08</td> <td>-11.63</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>									Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.22	0.95	-16.10	Maximum	4.77	1.20	-5.41	Average	3.59	1.08	-11.63	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
										Peak Phase °	RMS Phase °	Frequency Hz																		
									Minimum	2.22	0.95	-16.10																		
									Maximum	4.77	1.20	-5.41																		
	Average	3.59	1.08	-11.63																										
	Pass/Fail	Pass	Pass	Pass																										
	Return																													
	50 / 50																													
	Single																													
	Active Cell Connected								Sys Type: GSM																					
IntRef Offset R T								1 of 2																						
1 of 2								1 of 2																						

Control	Transmit Power								TCH Parms																									
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.02</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.02</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.02	----	----	----	Estimated Carrier Power	32.02	----	----	----	Downlink Traffic Power										
									Burst 1	Burst 2	Burst 3	Burst 4																						
Burst Power									32.02	----	----	----																						
Estimated Carrier Power									32.02	----	----	----																						
	Traffic Band																																	
	GS1850																																	
	Traffic Channel																																	
	251																																	
	MS TX Level																																	
	5																																	
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.14</td> <td>0.96</td> <td>-5.77</td> </tr> <tr> <td>Maximum</td> <td>4.81</td> <td>1.17</td> <td>6.58</td> </tr> <tr> <td>Average</td> <td>3.29</td> <td>1.08</td> <td>-0.66</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.14	0.96	-5.77	Maximum	4.81	1.17	6.58	Average	3.29	1.08	-0.66	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
Phase & Frequency Error																																		
									Peak Phase °	RMS Phase °	Frequency Hz																							
Minimum									2.14	0.96	-5.77																							
Maximum	4.81	1.17	6.58																															
Average	3.29	1.08	-0.66																															
Pass/Fail	Pass	Pass	Pass																															
	Return																																	
	1 of 2																																	
	<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="4">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Active Cell Connected				Sys Type: GSM																					
Active Cell Connected				Sys Type: GSM																														
1 of 2									1 of 2																									

Control	Power vs Time Graph								TCH Parms																					
Power vs Time Setup									Downlink Traffic Power																					
									Traffic Band																					
									GS1850																					
									Traffic Channel																					
	128																													
	MS TX Level																													
	5																													
Change View	<table border="1"> <thead> <tr> <th>Burst</th> <th>Px Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.45</td> <td>GMSK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst	Px Power (dBm)	Modulation	Mask	1	32.45	GMSK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Channel Mode Setup	
Burst									Px Power (dBm)	Modulation	Mask																			
1									32.45	GMSK	ETSI																			
2									----	----	----																			
3	----	----	----																											
4	----	----	----																											
	Return																													
	1 of 2																													
	<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="4">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Active Cell Connected				Sys Type: GSM																	
Active Cell Connected				Sys Type: GSM																										
1 of 2									1 of 2																					

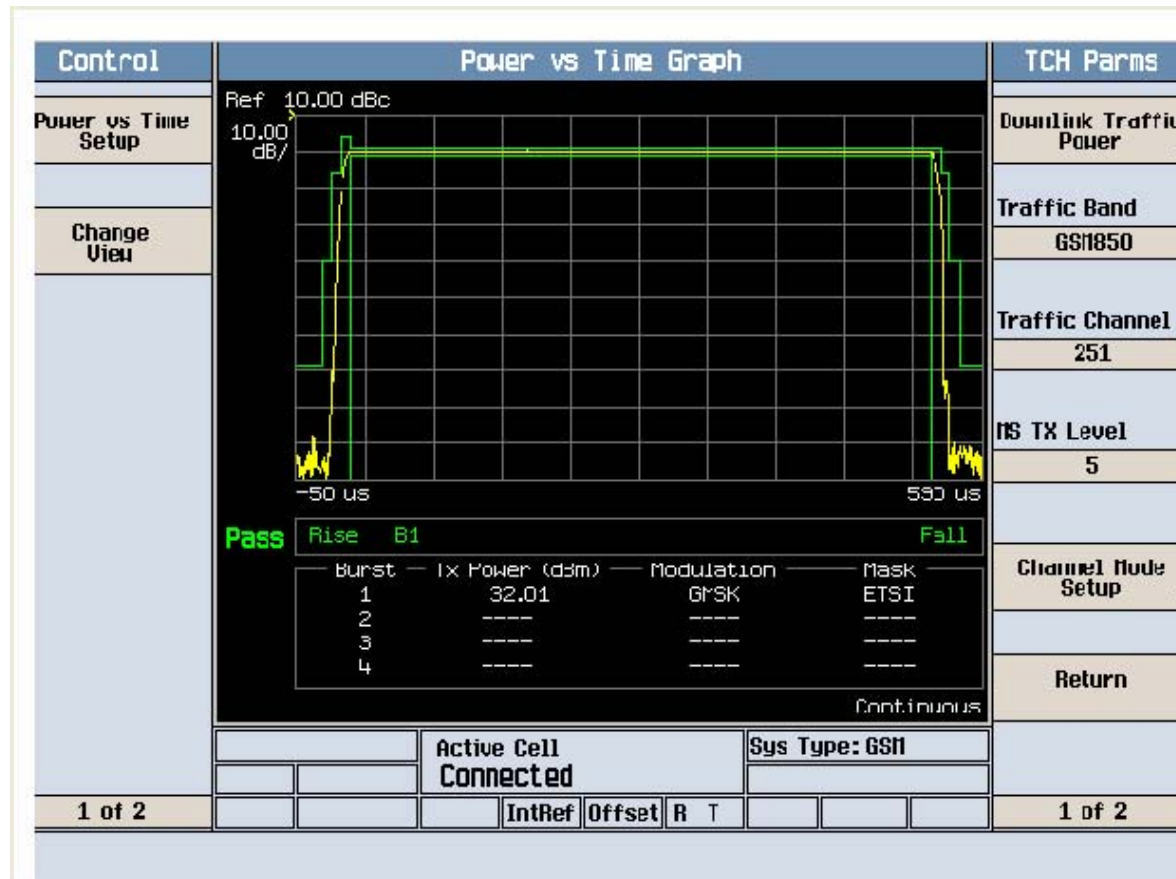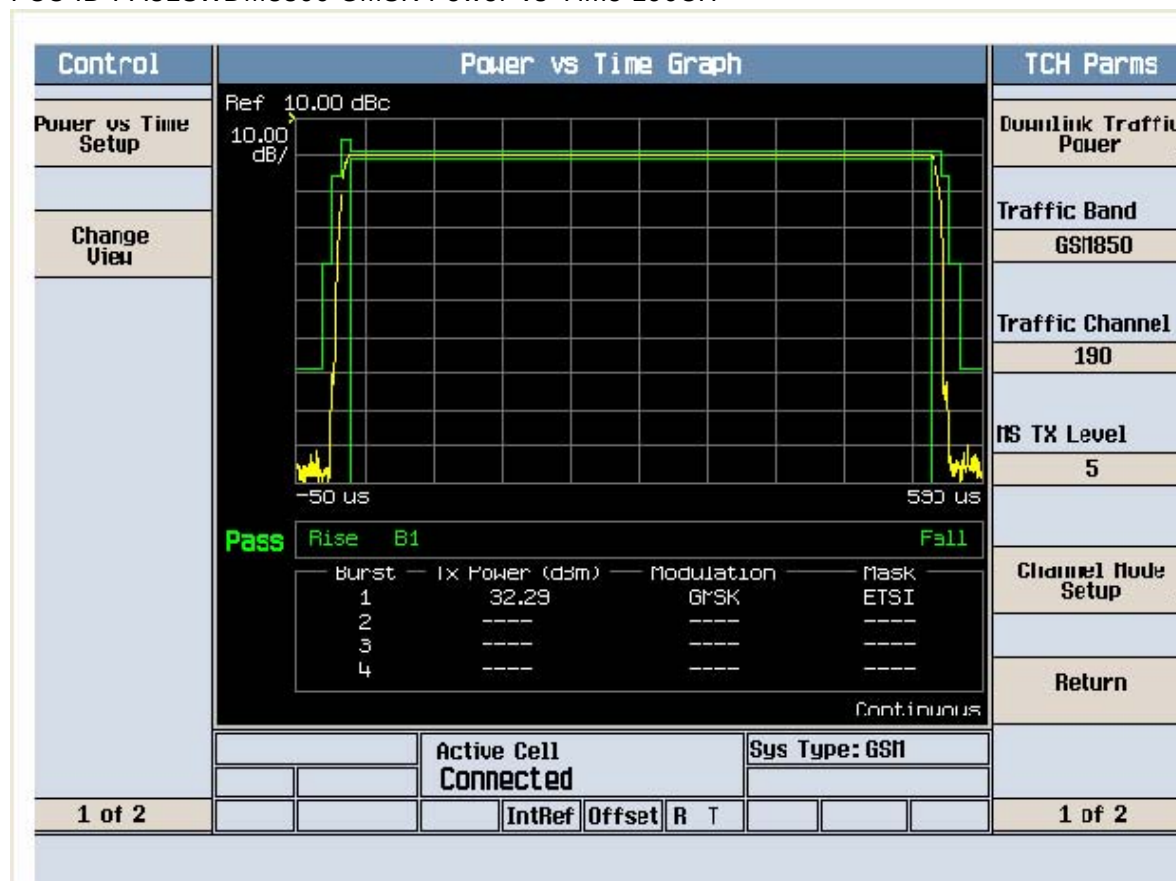

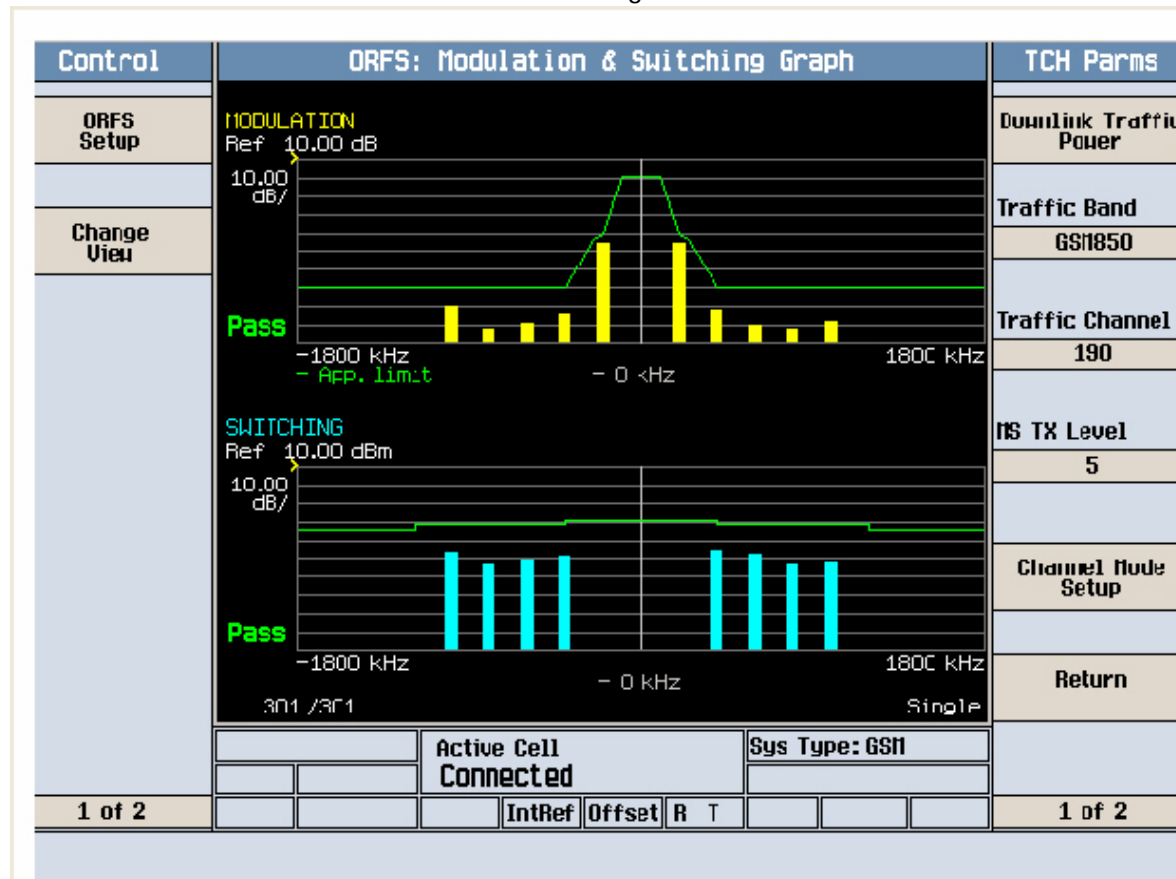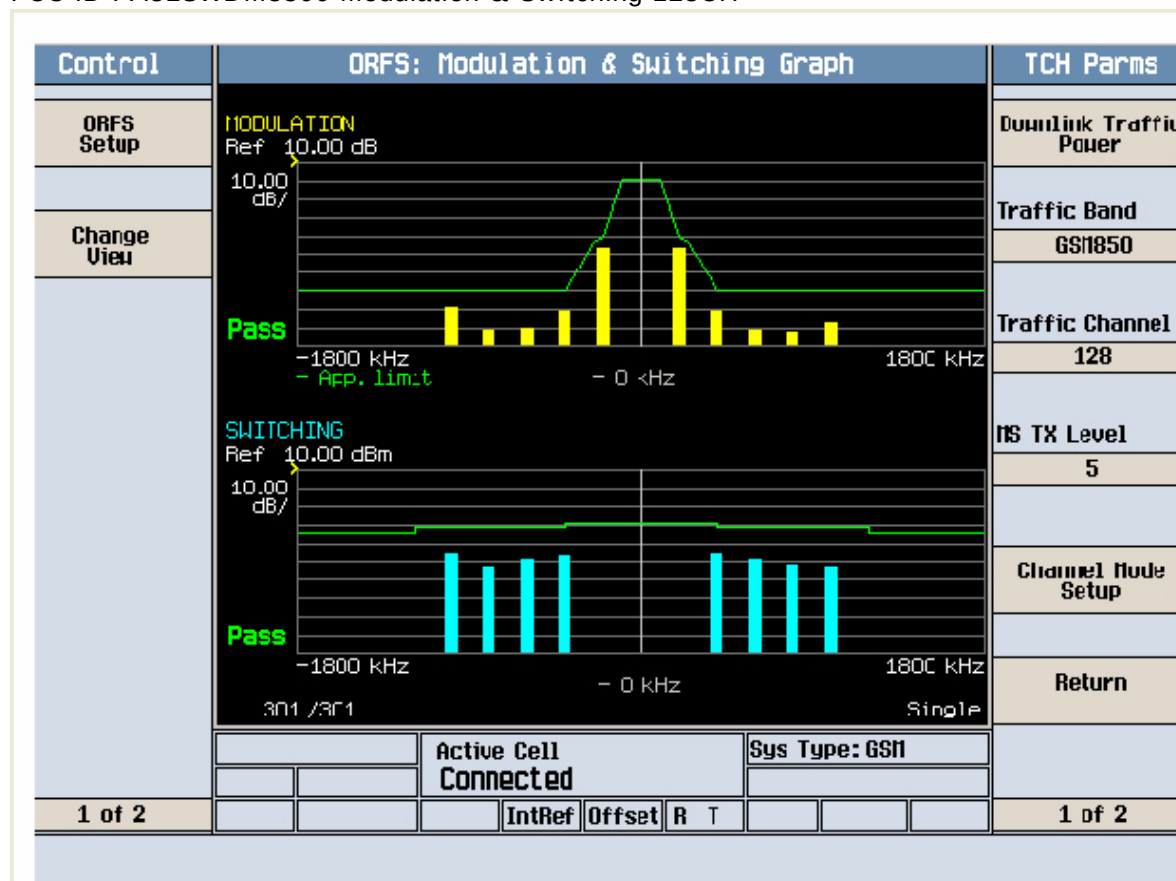

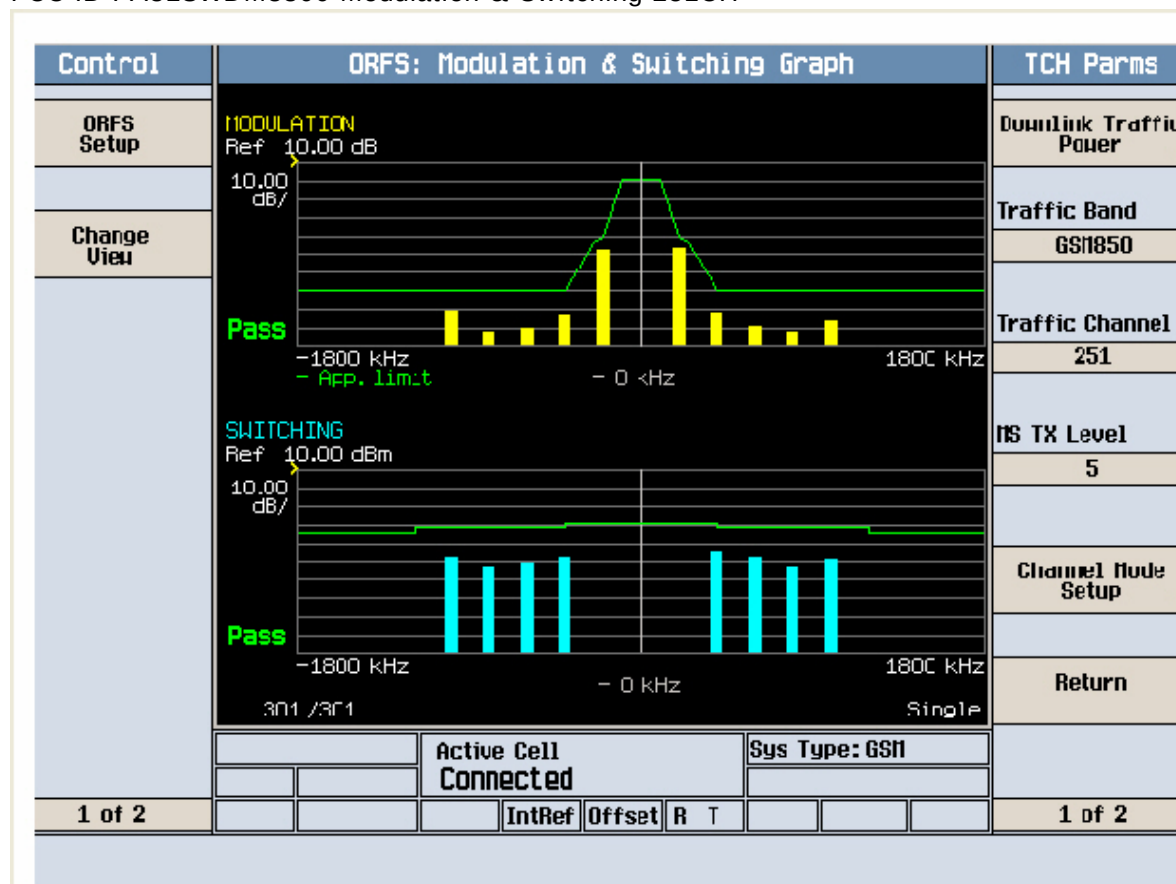

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.128

Mkr1 817.9 MHz

Ref 33 dBm

Atten 40 dB

-32.84 dBm

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq
414.600000 MHz

Start Freq
10.0000000 MHz

Stop Freq
819.200000 MHz

CF Step
80.9200000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

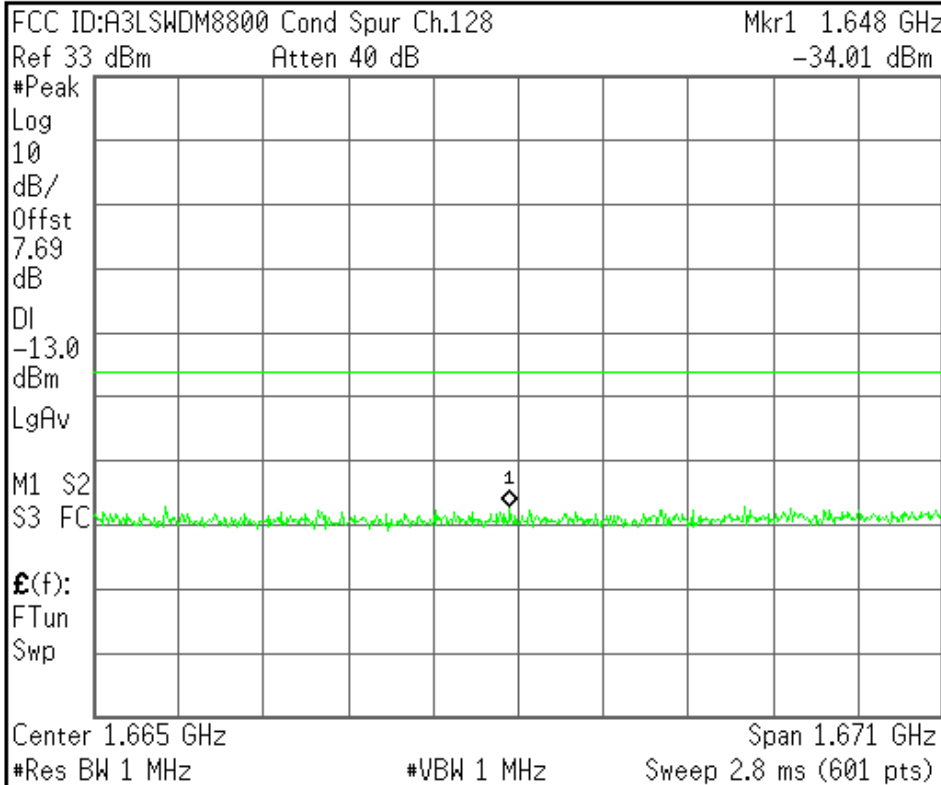

Center Freq
 1.66460000 GHz

Start Freq
 829.200000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 167.080000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

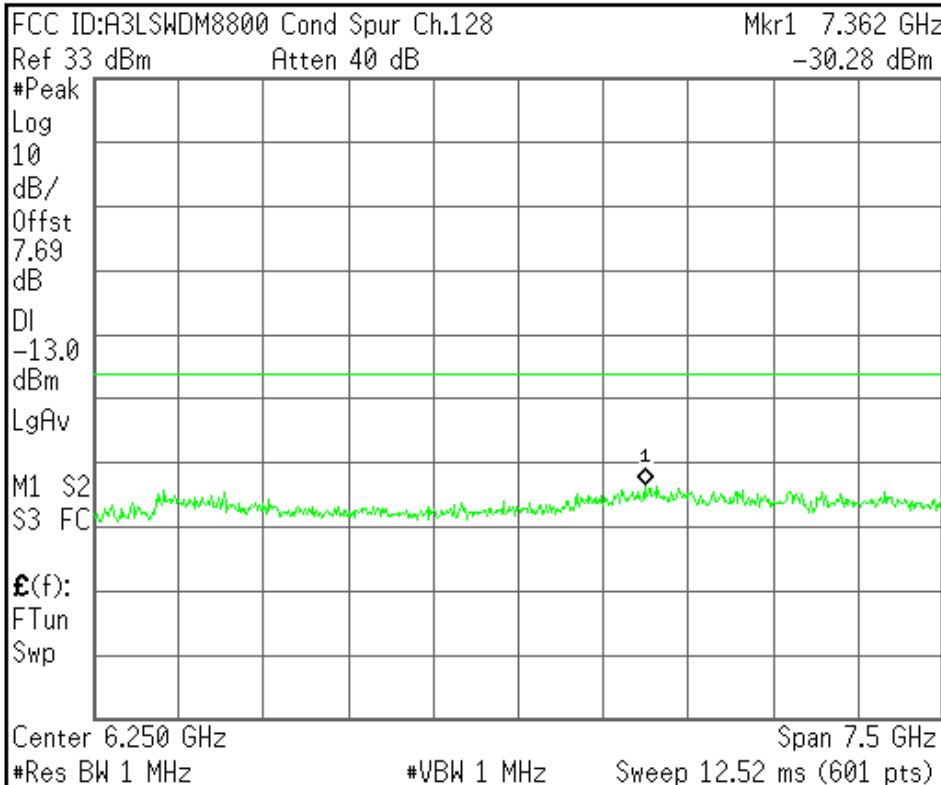

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.190

Mkr1 830.2 MHz

Ref 33 dBm

Atten 40 dB

-33.81 dBm

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$E(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz

Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

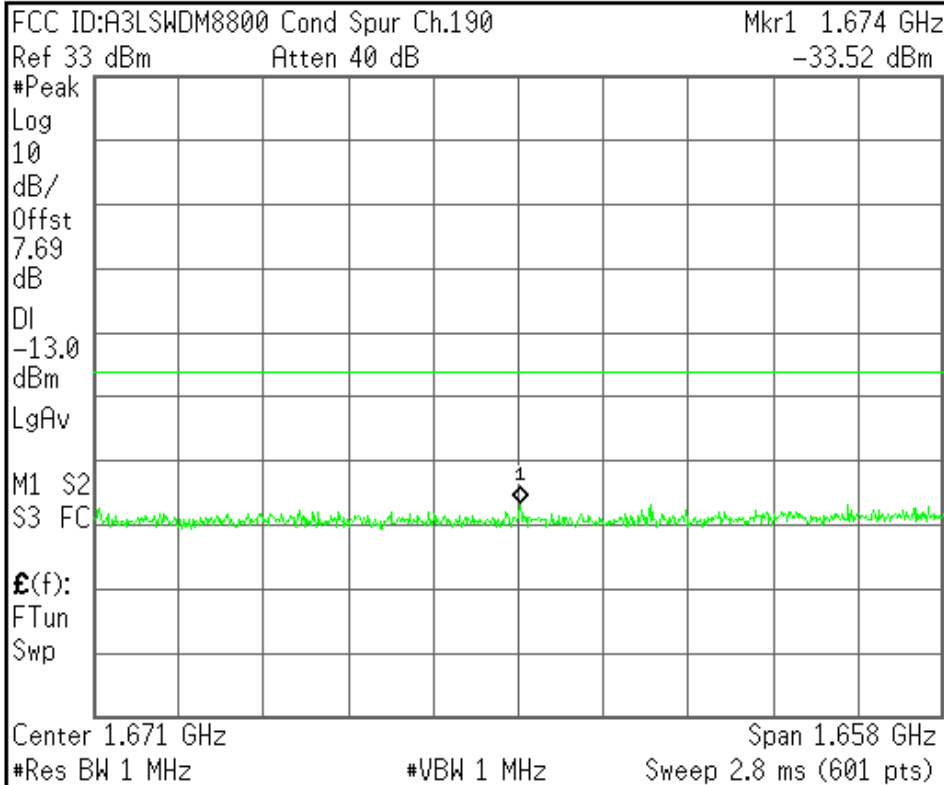

Center Freq
 1.67080000 GHz

Start Freq
 841.600000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 165.840000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

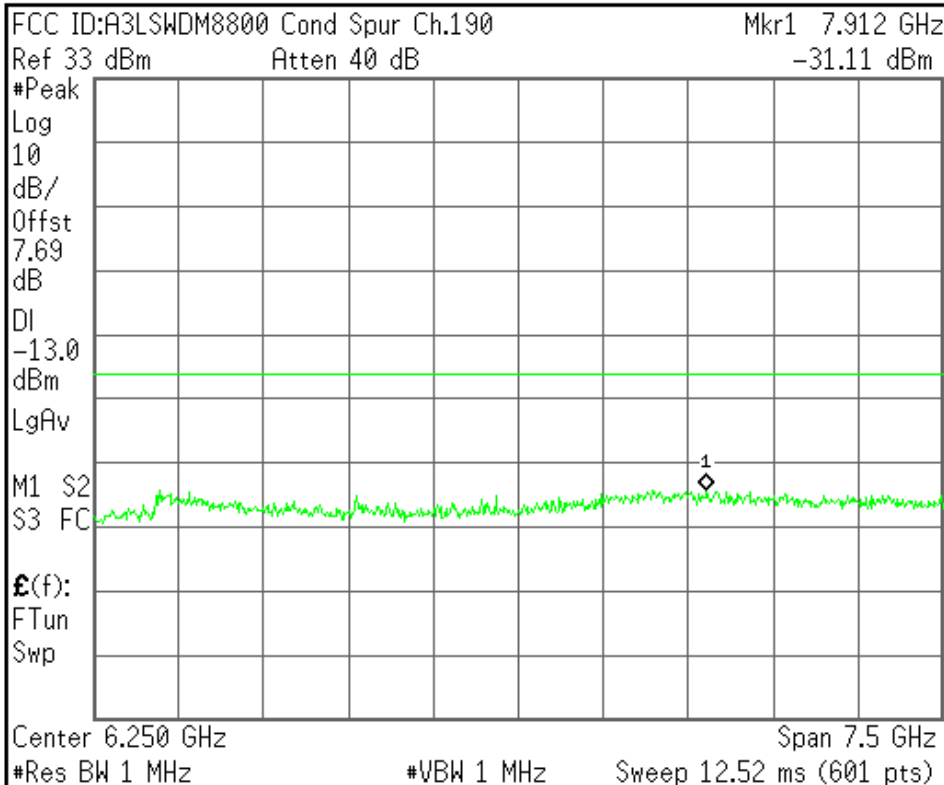

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.251

Mkr1 842.4 MHz

Ref 33 dBm

Atten 40 dB

-33.64 dBm

#Peak

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
426.900000 MHz

Start Freq
10.0000000 MHz

Stop Freq
843.800000 MHz

CF Step
83.3800000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

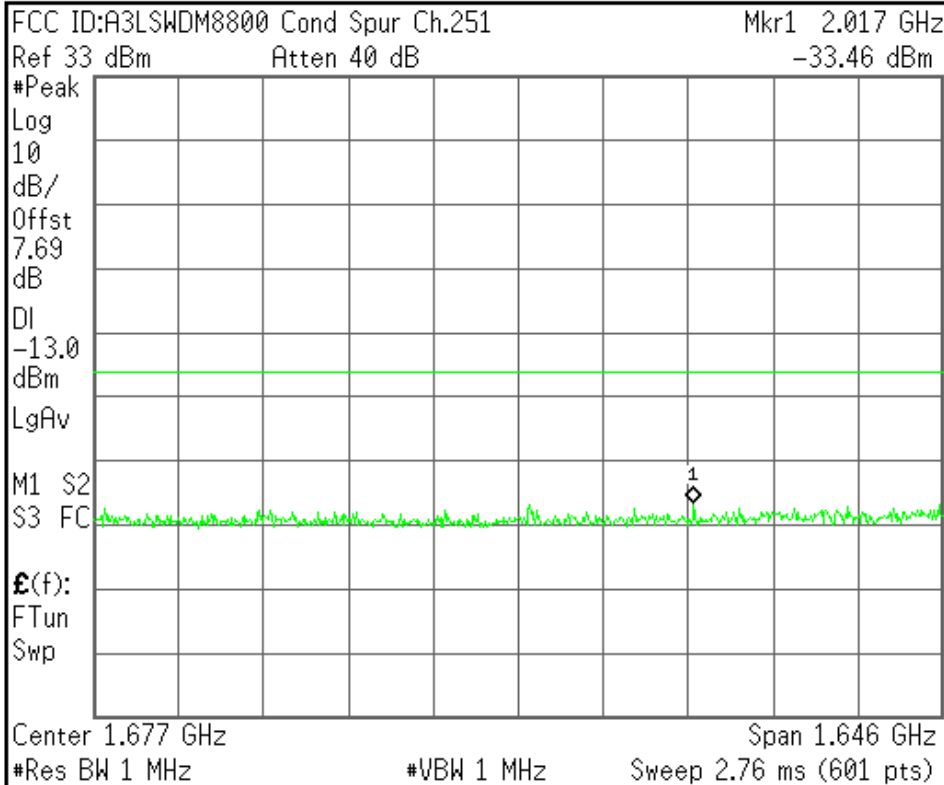

Center Freq
 1.67690000 GHz

Start Freq
 853.800000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 164.620000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

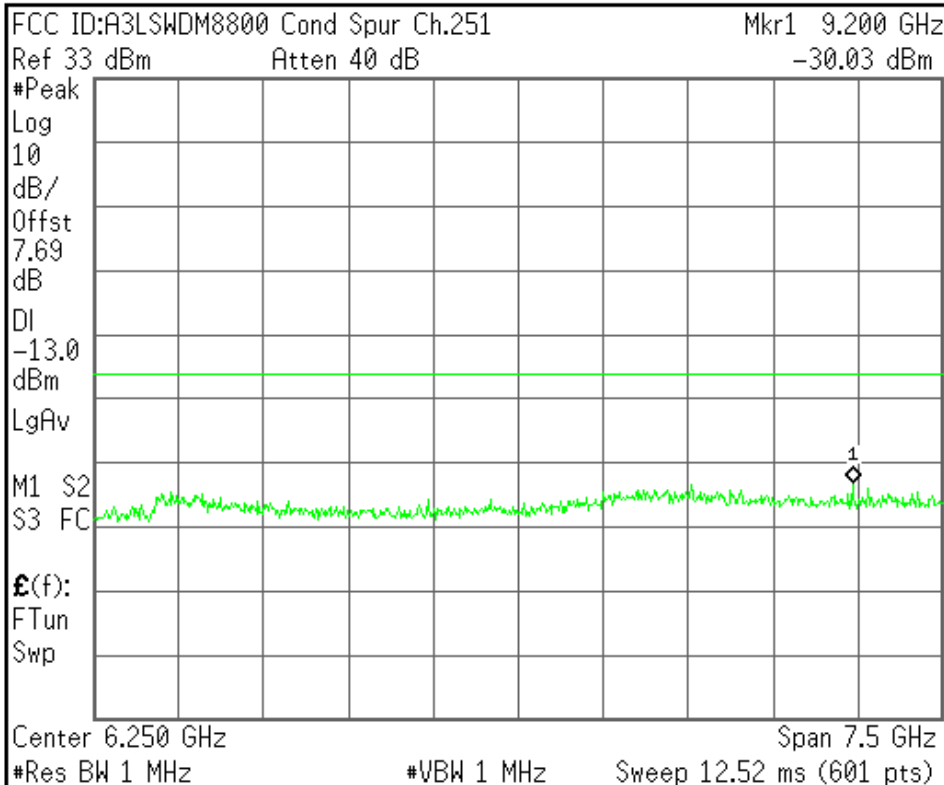

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

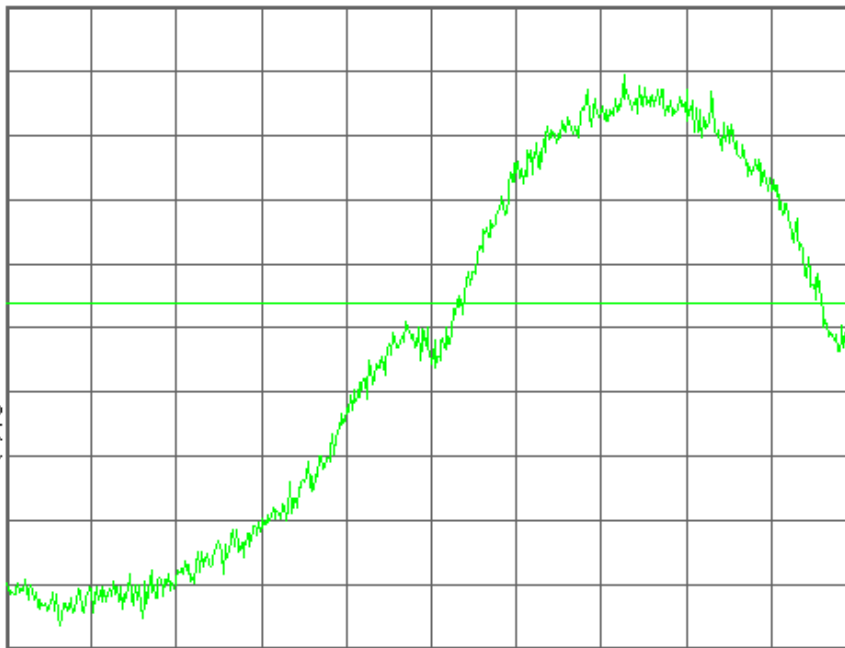

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.128

Mkr1 823.996 0 MHz

Ref 33 dBm

Atten 40 dB

-15.52 dBm

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

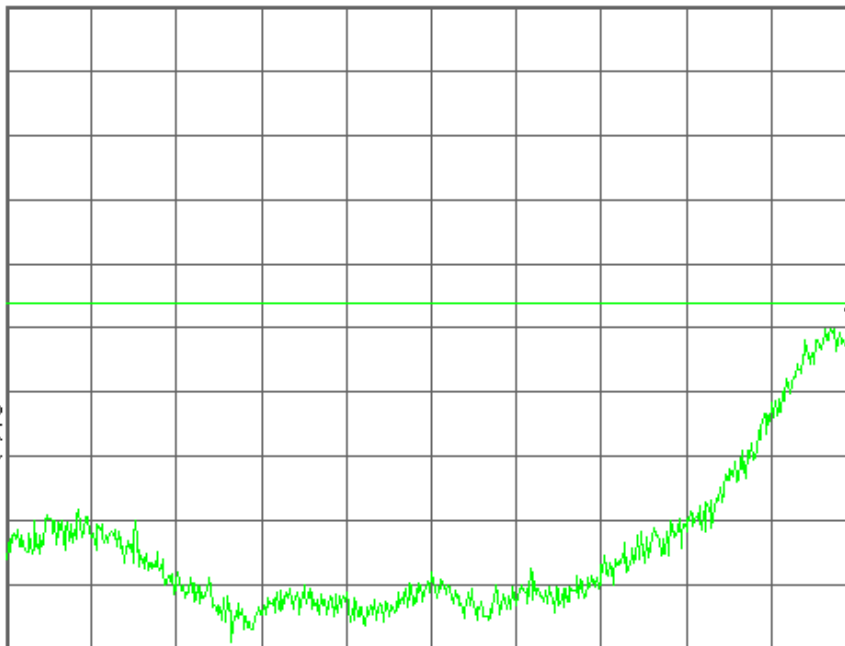

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

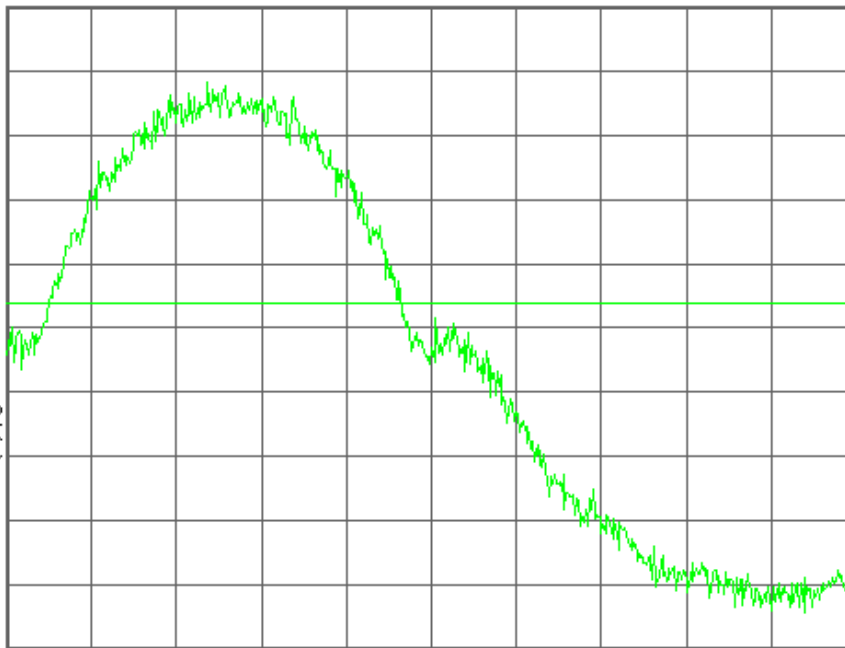

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.251

Mkr1 849.017 4 MHz

Ref 33 dBm

Atten 40 dB

-16.01 dBm

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

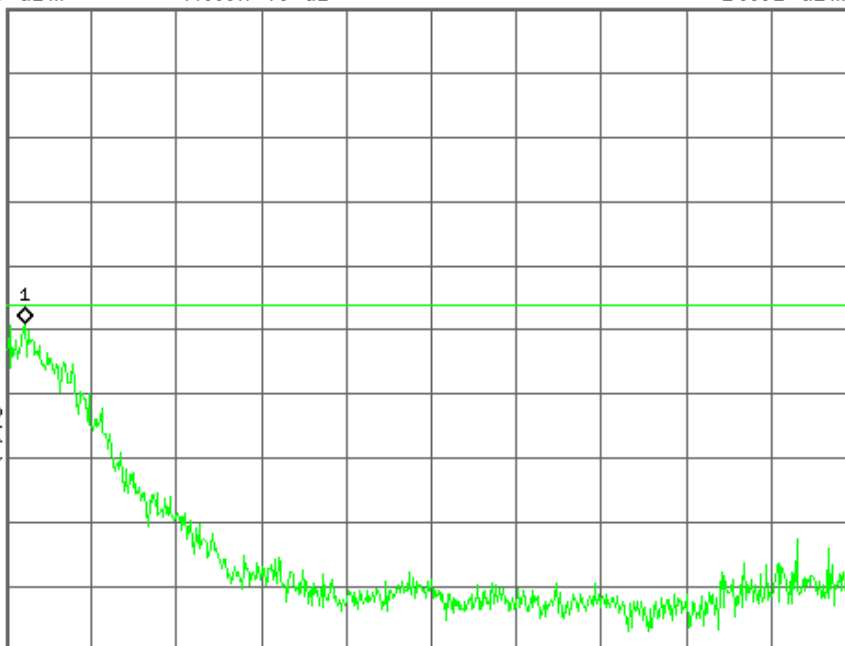

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz



Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

GSM1900



R T

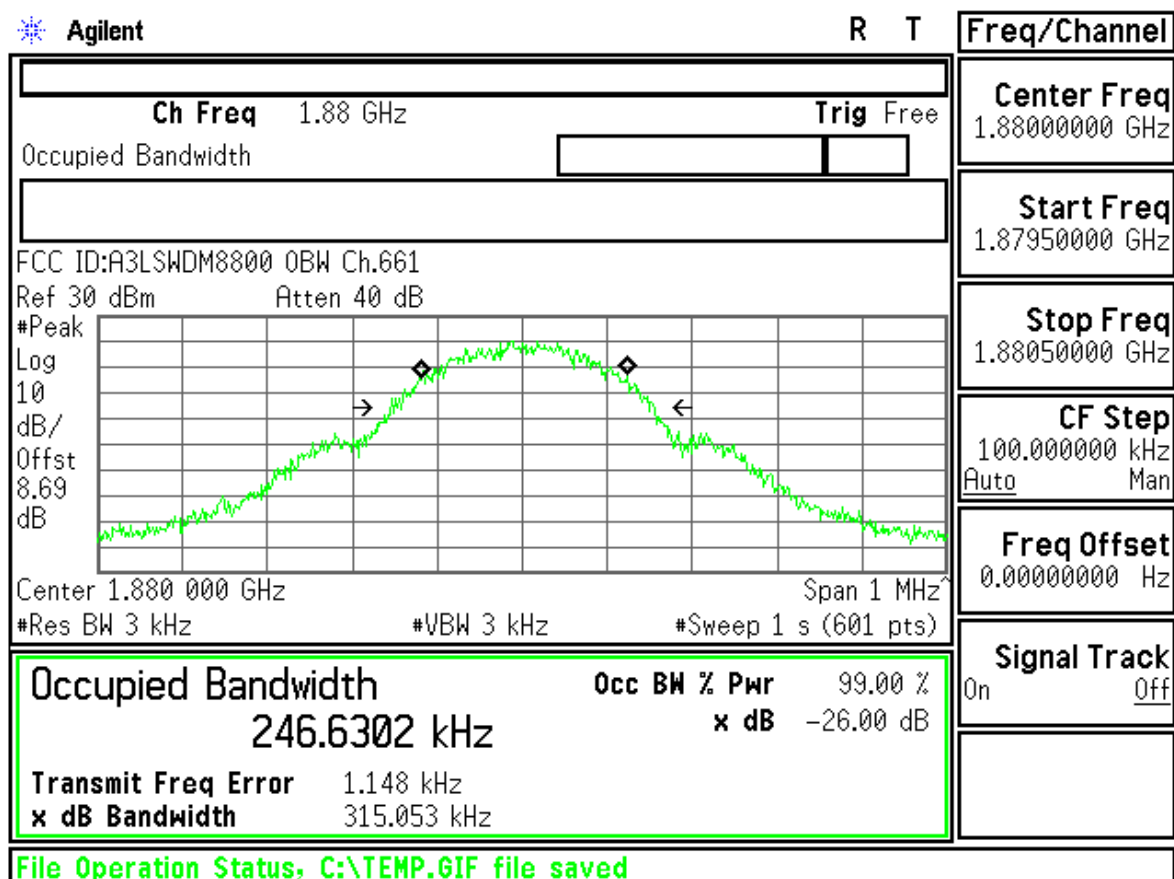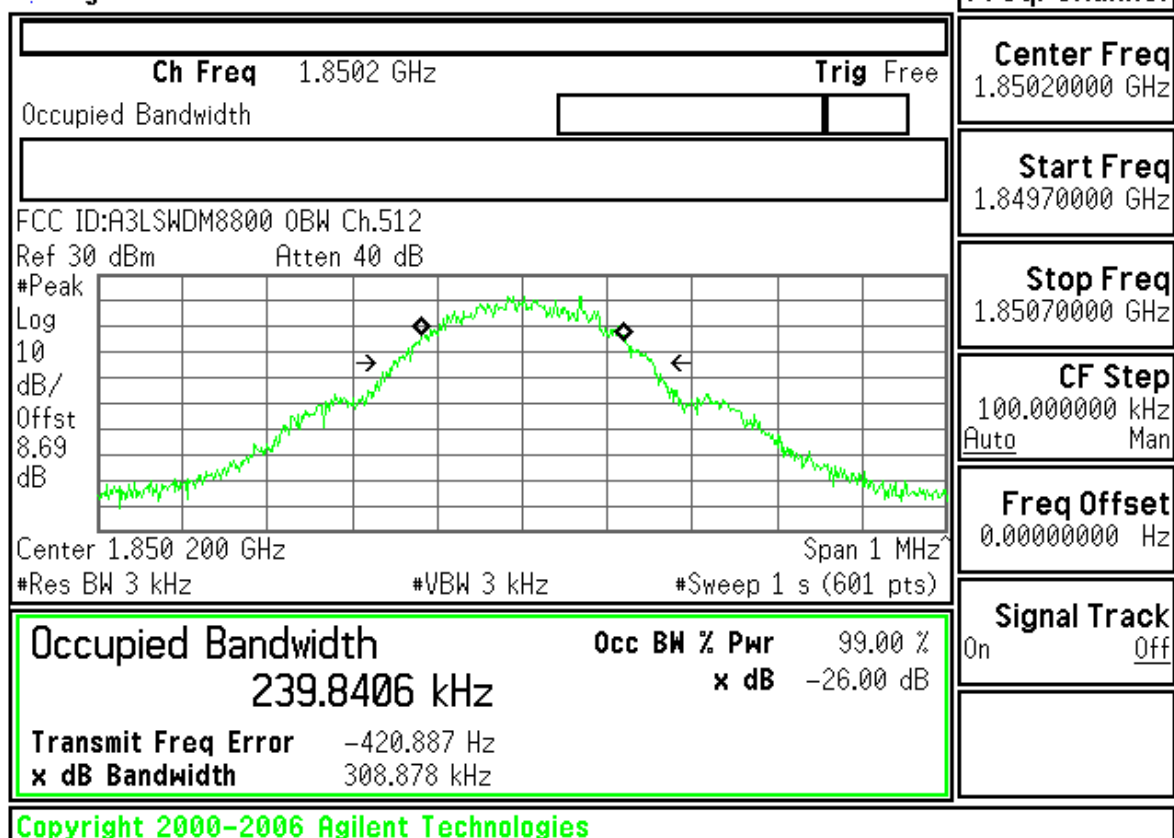


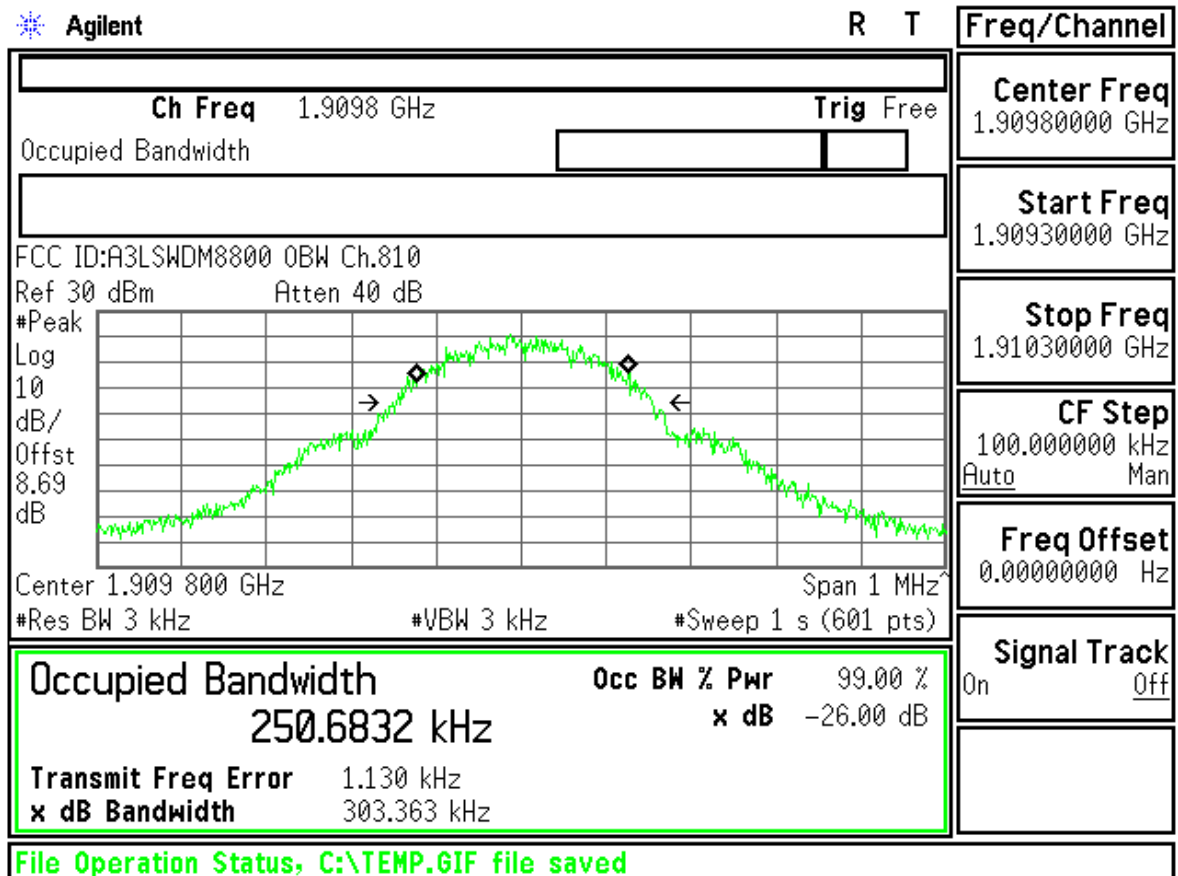




FCC ID : A3LSWDM8800 Transmit Power 512CH



Measurement/Instrument Screen																																
Control		Transmit Power									TCH Parms																					
Transmit Power Setup		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.52</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.52</td><td>----</td><td>----</td><td>----</td></tr></table>										Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.52	----	----	----	Estimated Carrier Power	29.52	----	----	----	Downlink Traffic Power						
												Burst 1	Burst 2	Burst 3	Burst 4																	
											Burst Power	29.52	----	----	----																	
		Estimated Carrier Power	29.52	----	----	----																										
		Traffic Band																														
PCS																																
Single									Traffic Channel																							
									512																							
Swap Window Positions		Phase & Frequency Error									MS TX Level																					
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>3.47</td><td>1.24</td><td>-18.37</td></tr><tr><td>Maximum</td><td>6.62</td><td>1.83</td><td>3.16</td></tr><tr><td>Average</td><td>4.76</td><td>1.47</td><td>-7.05</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>										Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.47	1.24	-18.37	Maximum	6.62	1.83	3.16	Average	4.76	1.47	-7.05	Pass/Fail	Pass	Pass	Pass	0	
												Peak Phase °	RMS Phase °	Frequency Hz																		
											Minimum	3.47	1.24	-18.37																		
											Maximum	6.62	1.83	3.16																		
Average	4.76	1.47	-7.05																													
Pass/Fail	Pass	Pass	Pass																													
50 / 50									Channel Mode Setup																							
Single									Return																							
1 of 2					Active Cell Connected			Sys Type: GSM			1 of 2																					
						IntRef	Offset	R	T																							

Measurement/Instrument Screen																																							
Control	Transmit Power							TCH Parms																															
Transmit Power Setup ▾								Downlink Traffic Power ▾																															
								Traffic Band																															
								PCS																															
								Traffic Channel																															
Swap Window Positions								661																															
								MS TX Level																															
								0																															
								Channel Mode Setup ▾																															
								Return																															
							1 of 2																																
<table border="1"> <thead> <tr> <th colspan="4">Burst 1</th> <th colspan="2">Burst 2</th> <th colspan="2">Burst 3</th> <th colspan="2">Burst 4</th> </tr> </thead> <tbody> <tr> <td colspan="4">Burst Power</td> <td colspan="2">29.44</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> <tr> <td colspan="4">Estimated Carrier Power</td> <td colspan="2">29.44</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> </tbody> </table>										Burst 1				Burst 2		Burst 3		Burst 4		Burst Power				29.44		----		----		Estimated Carrier Power				29.44		----		----	
Burst 1				Burst 2		Burst 3		Burst 4																															
Burst Power				29.44		----		----																															
Estimated Carrier Power				29.44		----		----																															
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.05</td> <td>1.27</td> <td>-12.85</td> </tr> <tr> <td>Maximum</td> <td>6.44</td> <td>1.83</td> <td>13.51</td> </tr> <tr> <td>Average</td> <td>4.60</td> <td>1.52</td> <td>-0.95</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.05	1.27	-12.85	Maximum	6.44	1.83	13.51	Average	4.60	1.52	-0.95	Pass/Fail	Pass	Pass	Pass						
Phase & Frequency Error																																							
	Peak Phase °	RMS Phase °	Frequency Hz																																				
Minimum	3.05	1.27	-12.85																																				
Maximum	6.44	1.83	13.51																																				
Average	4.60	1.52	-0.95																																				
Pass/Fail	Pass	Pass	Pass																																				
<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="2">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> </tr> </tbody> </table>										Active Cell Connected				Sys Type: GSM																									
Active Cell Connected				Sys Type: GSM																																			
<table border="1"> <thead> <tr> <th colspan="4">IntRef</th> <th colspan="2">Offset</th> <th colspan="2">R T</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </tbody> </table>										IntRef				Offset		R T																							
IntRef				Offset		R T																																	

Measurement/Instrument Screen																																							
Control	Transmit Power							TCH Parms																															
Transmit Power Setup ▾								Downlink Traffic Power ▾																															
								Traffic Band																															
								PCS																															
								Traffic Channel																															
Swap Window Positions								810																															
								MS TX Level																															
								0																															
								Channel Mode Setup ▾																															
								Return																															
								1 of 2																															
<table border="1"> <thead> <tr> <th colspan="4">Burst 1</th> <th colspan="2">Burst 2</th> <th colspan="2">Burst 3</th> <th colspan="2">Burst 4</th> </tr> </thead> <tbody> <tr> <td colspan="4">Burst Power</td> <td colspan="2">29.10</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> <tr> <td colspan="4">Estimated Carrier Power</td> <td colspan="2">29.10</td> <td colspan="2">----</td> <td colspan="2">----</td> </tr> </tbody> </table>										Burst 1				Burst 2		Burst 3		Burst 4		Burst Power				29.10		----		----		Estimated Carrier Power				29.10		----		----	
Burst 1				Burst 2		Burst 3		Burst 4																															
Burst Power				29.10		----		----																															
Estimated Carrier Power				29.10		----		----																															
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.78</td> <td>1.29</td> <td>-7.42</td> </tr> <tr> <td>Maximum</td> <td>8.08</td> <td>1.90</td> <td>13.48</td> </tr> <tr> <td>Average</td> <td>5.04</td> <td>1.60</td> <td>2.52</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.78	1.29	-7.42	Maximum	8.08	1.90	13.48	Average	5.04	1.60	2.52	Pass/Fail	Pass	Pass	Pass						
Phase & Frequency Error																																							
	Peak Phase °	RMS Phase °	Frequency Hz																																				
Minimum	3.78	1.29	-7.42																																				
Maximum	8.08	1.90	13.48																																				
Average	5.04	1.60	2.52																																				
Pass/Fail	Pass	Pass	Pass																																				
<table border="1"> <thead> <tr> <th colspan="4">Active Cell Connected</th> <th colspan="2">Sys Type: GSM</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> </tr> </tbody> </table>										Active Cell Connected				Sys Type: GSM																									
Active Cell Connected				Sys Type: GSM																																			
<table border="1"> <thead> <tr> <th colspan="4">IntRef</th> <th colspan="2">Offset</th> <th colspan="2">R T</th> </tr> </thead> <tbody> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </tbody> </table>										IntRef				Offset		R T																							
IntRef				Offset		R T																																	

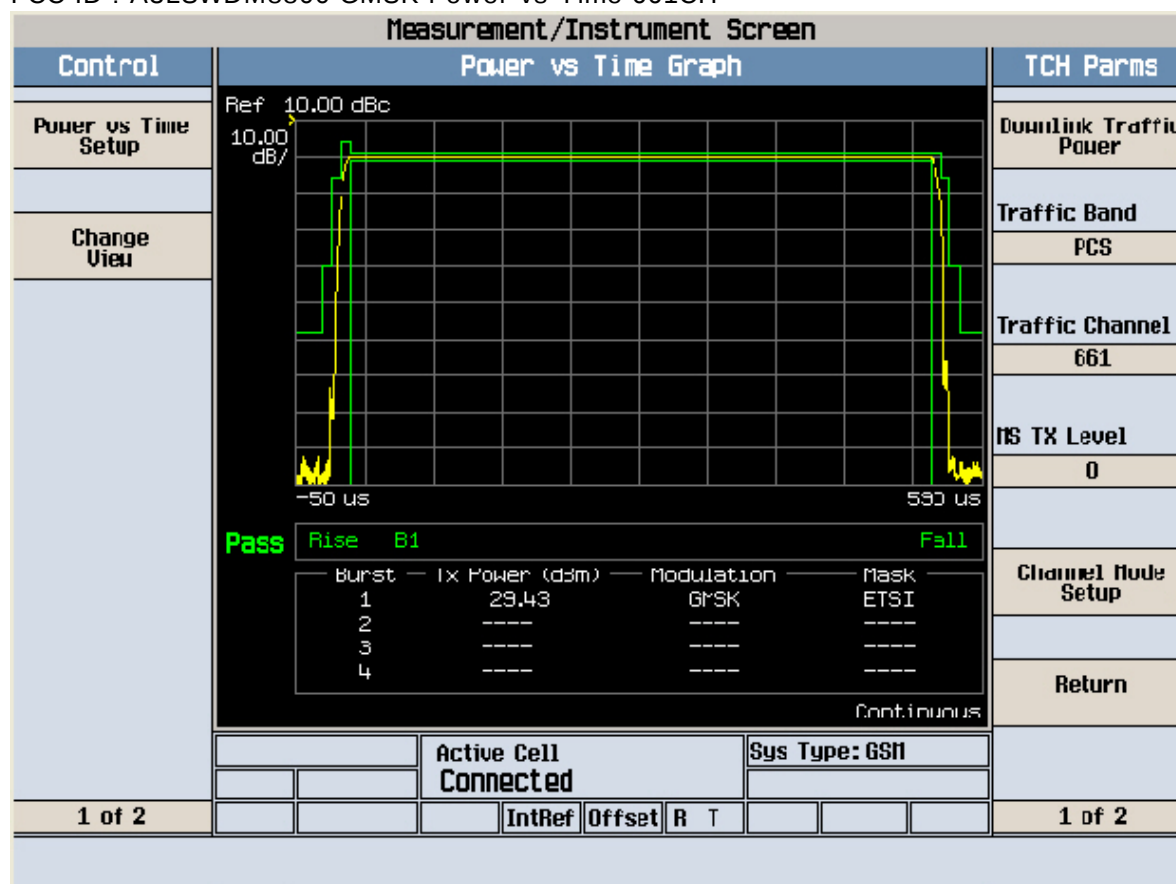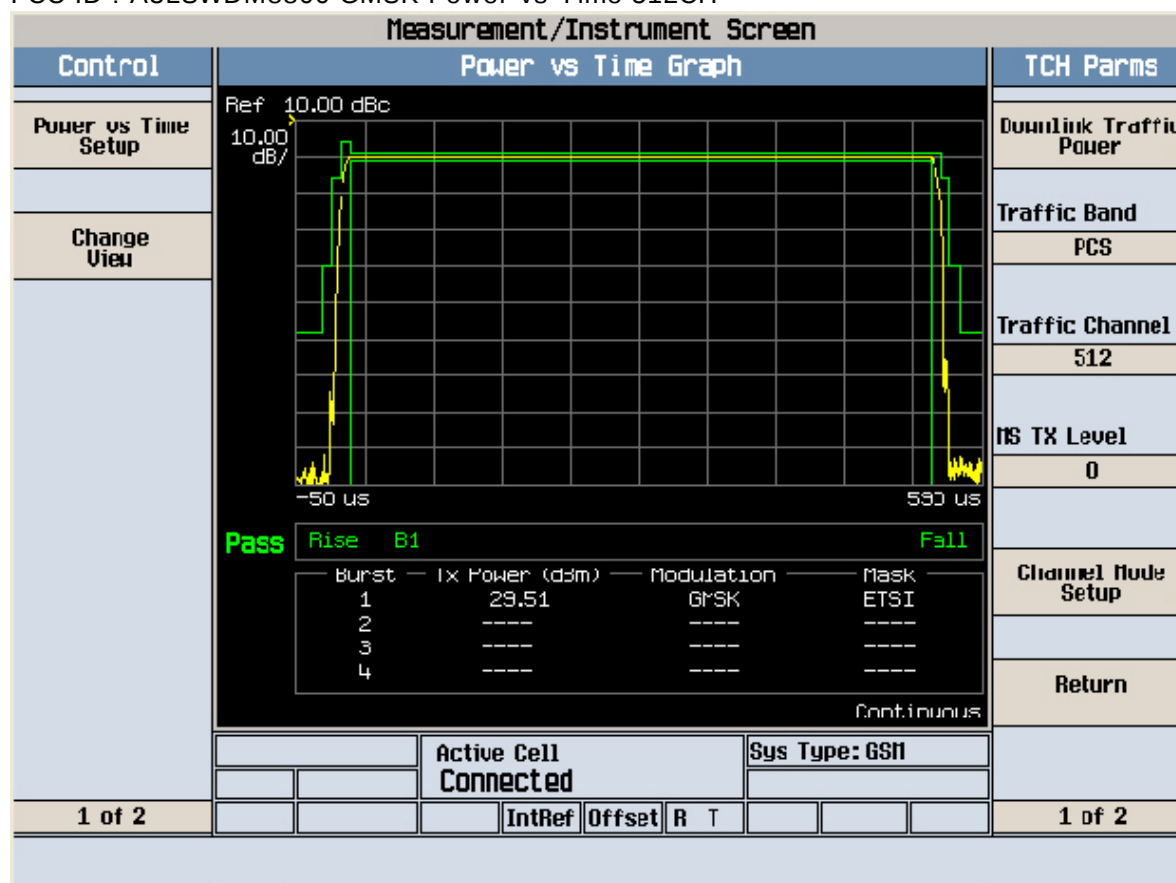

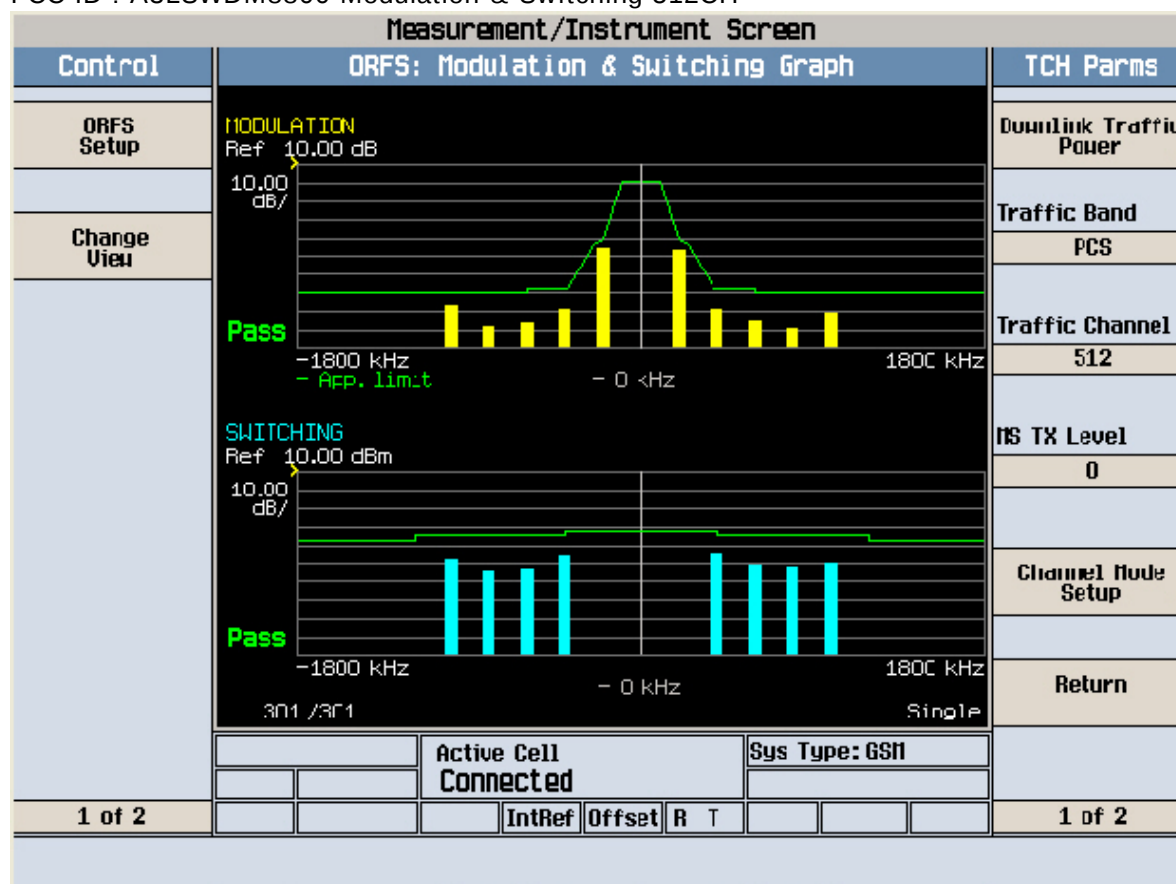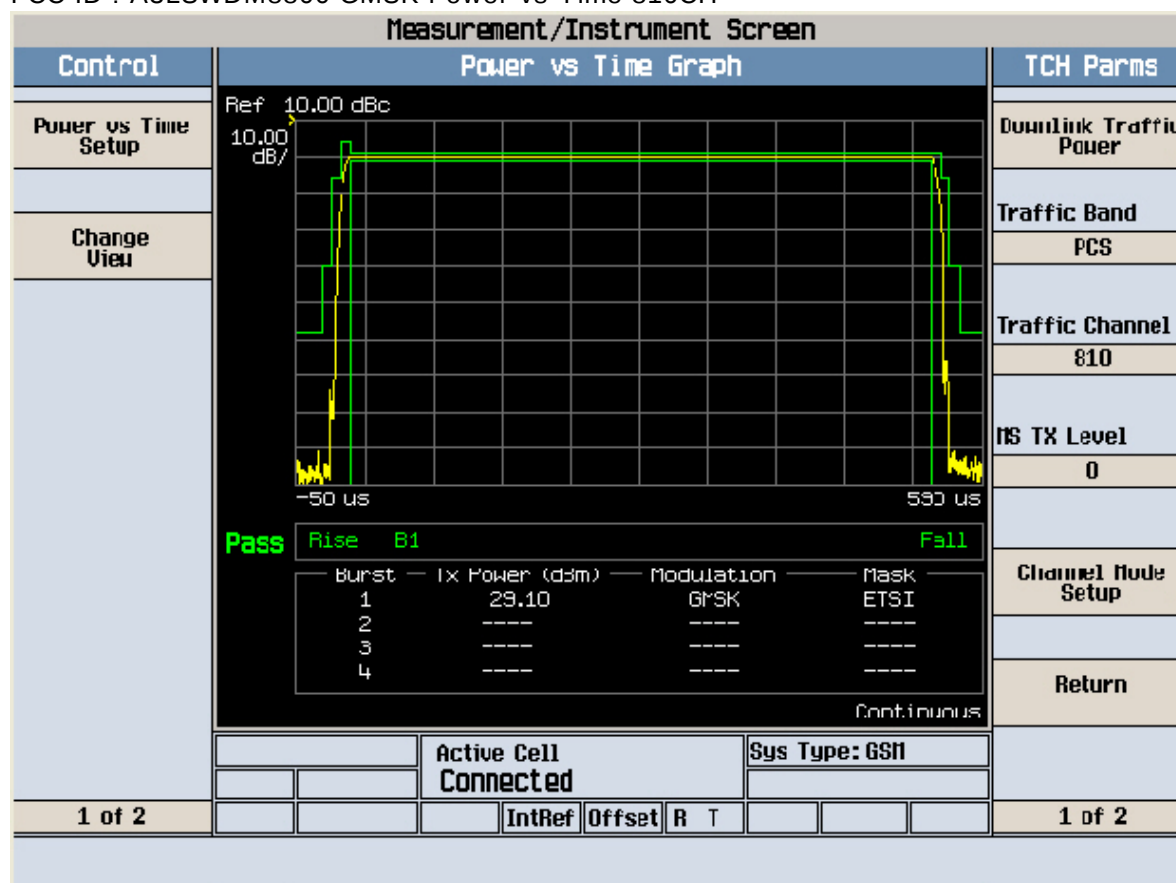

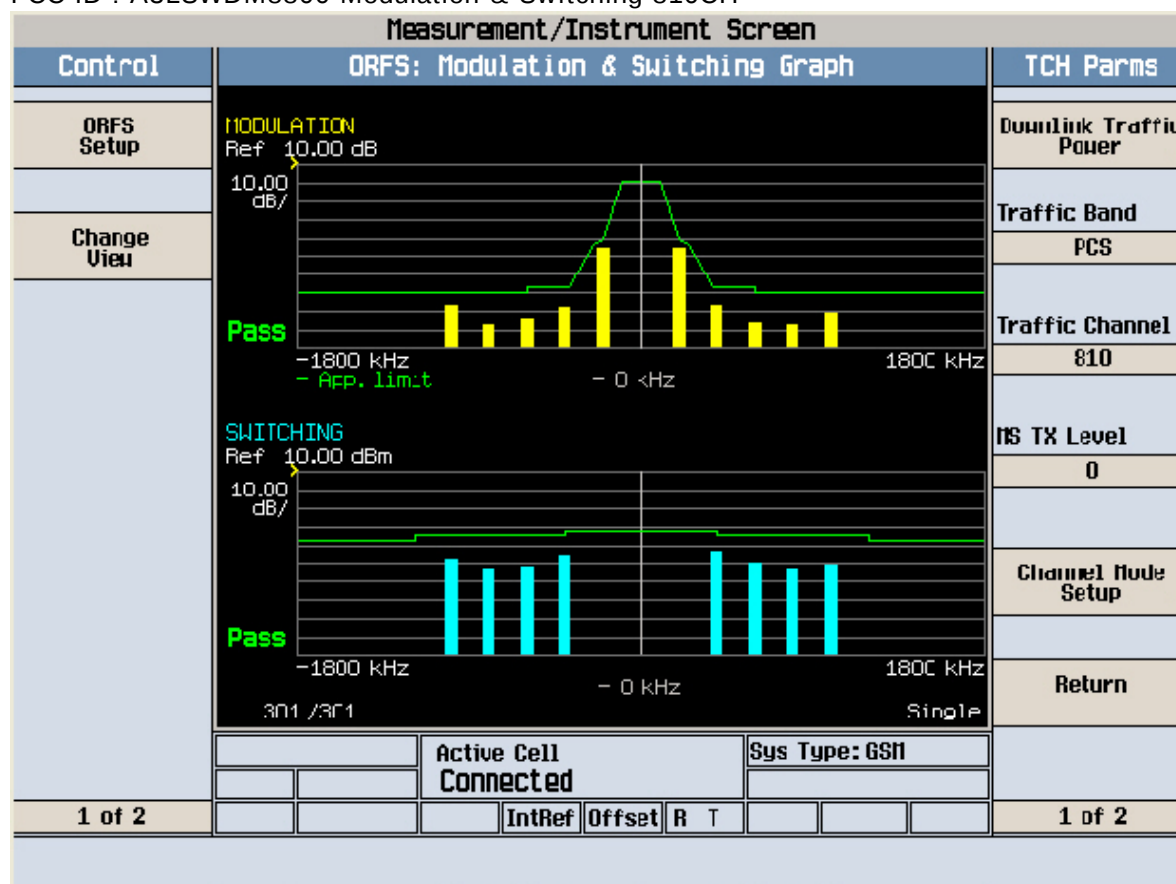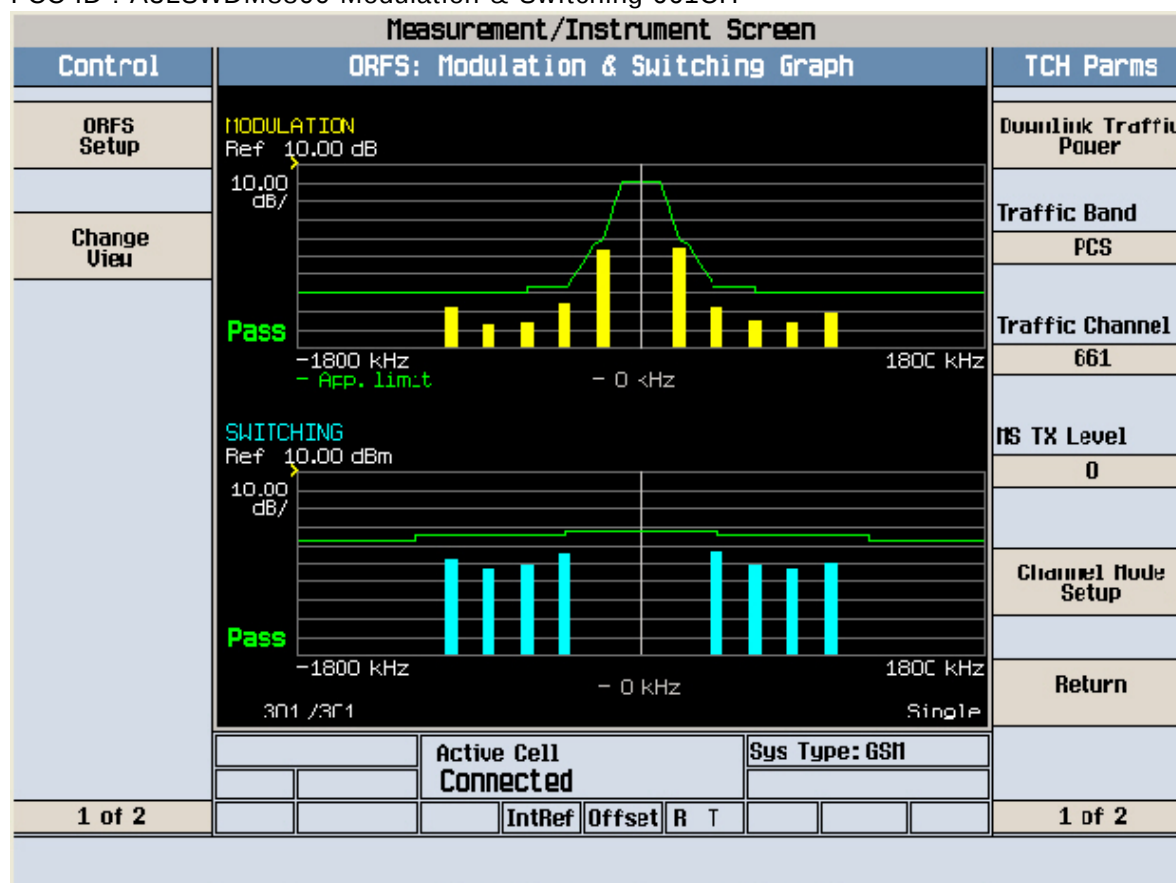

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.512

Mkr1 508 MHz

Ref 30 dBm

Atten 40 dB

-32.47 dBm

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

926.350000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.84270000 GHz

CF Step

183.270000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 926 MHz



Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

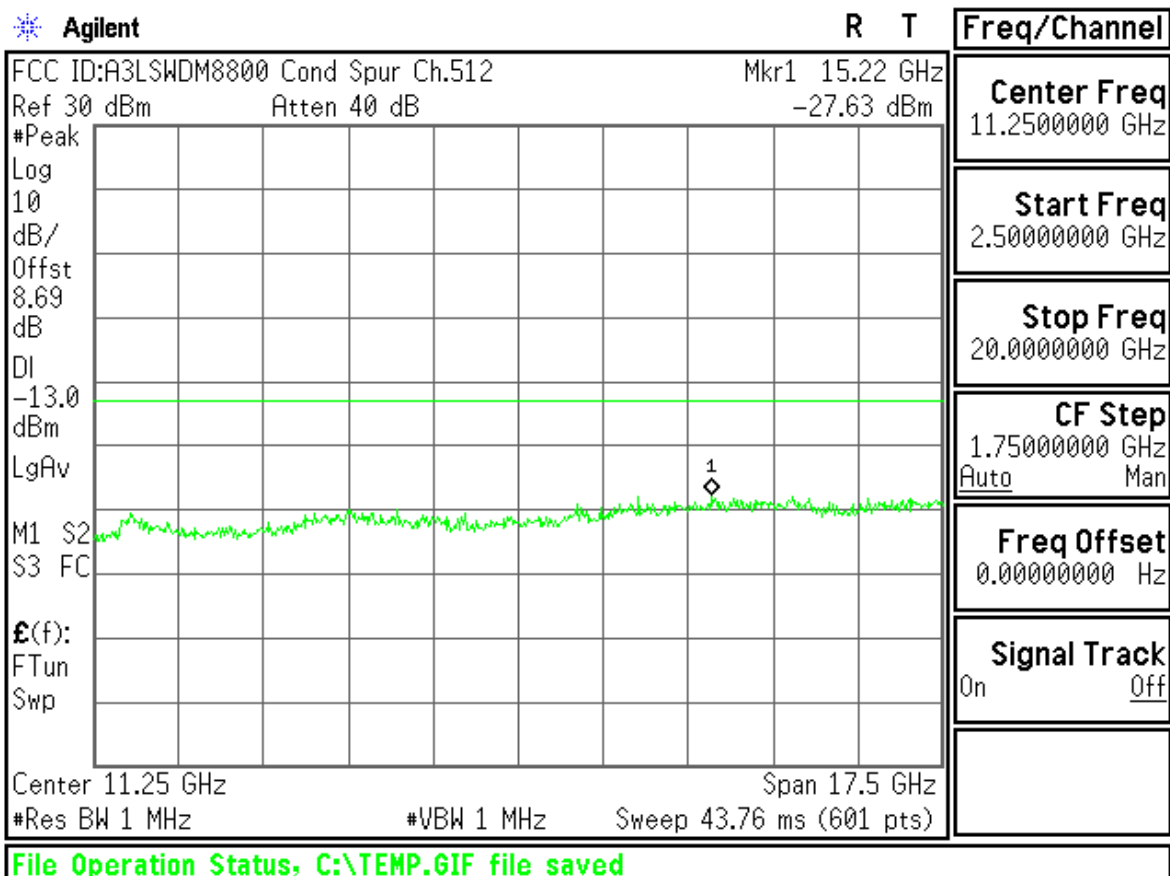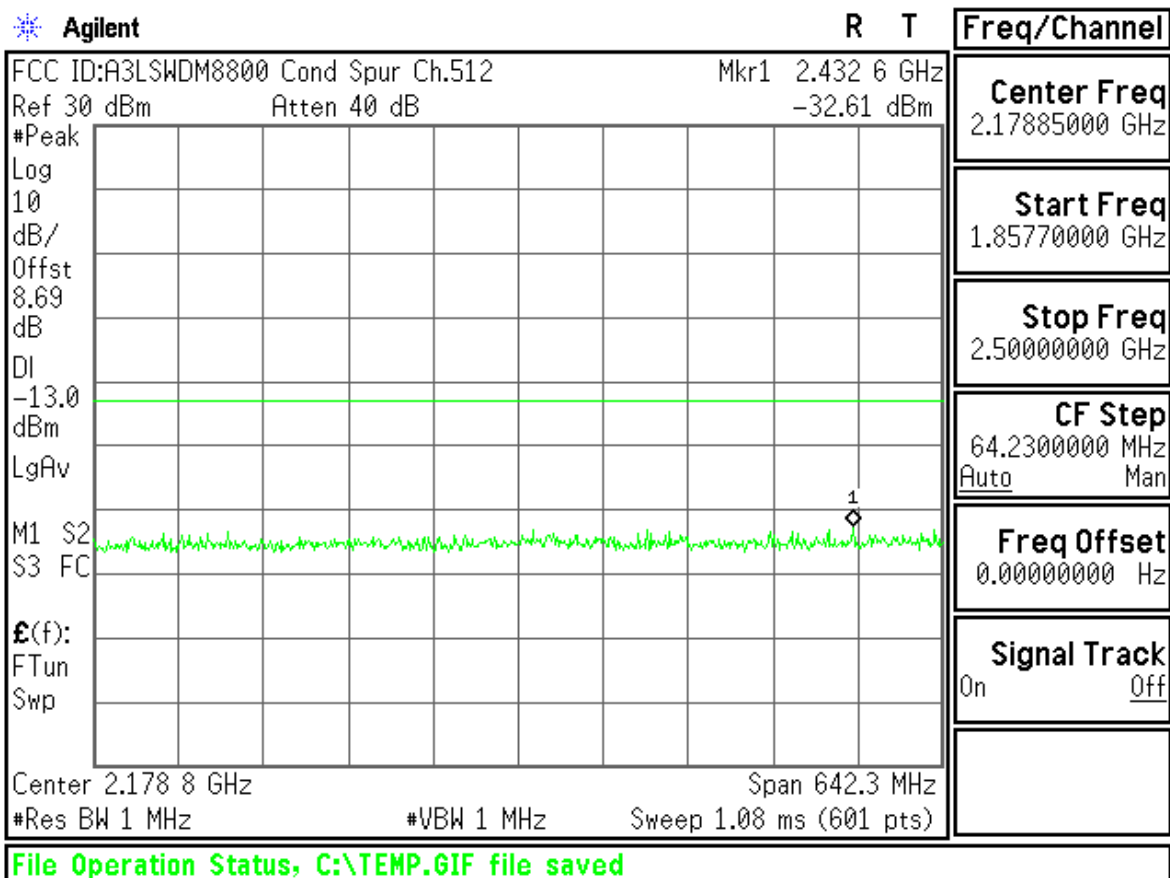

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.661

Mkr1 1.242 GHz

Ref 30 dBm

Atten 40 dB

-32.47 dBm

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

941.250000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.87250000 GHz

CF Step

186.250000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

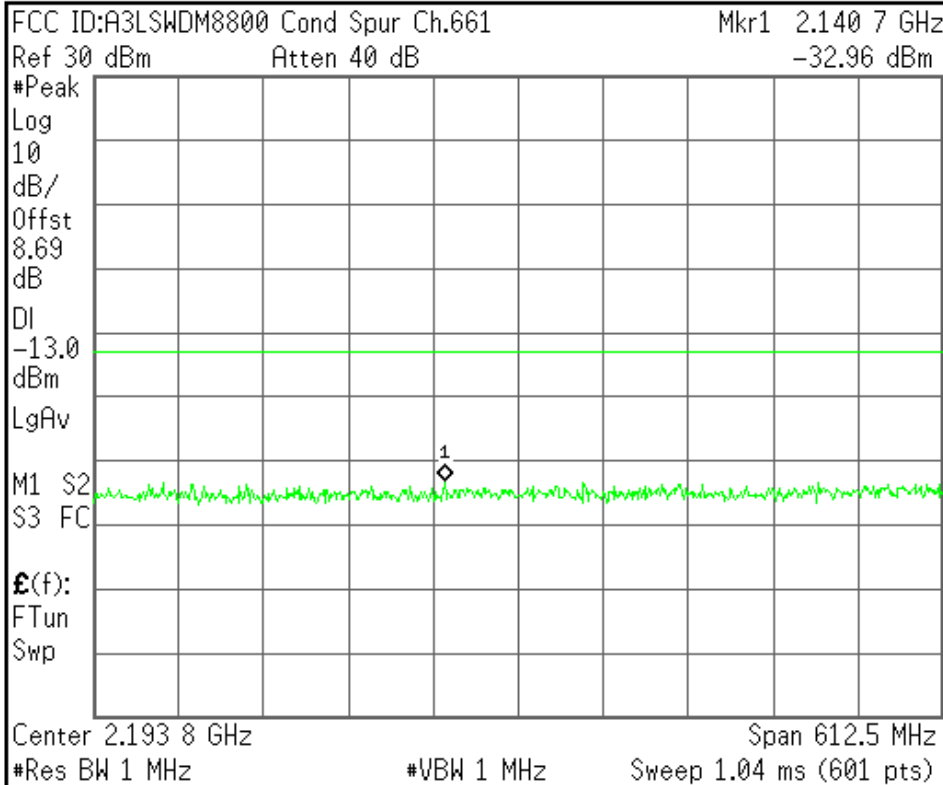

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

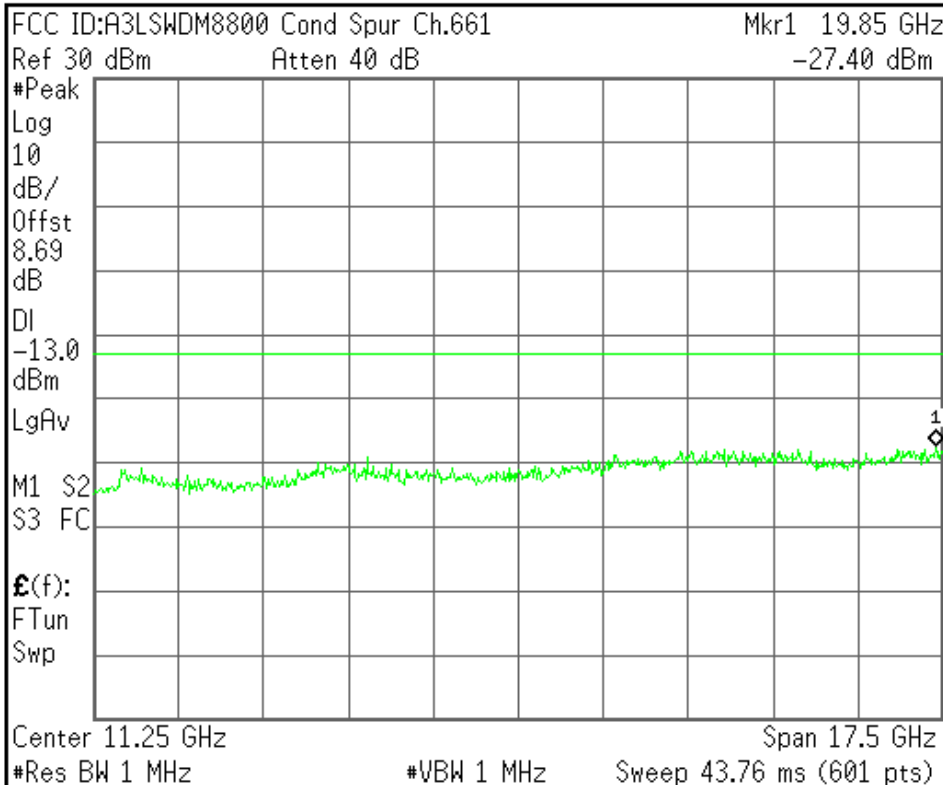

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.00000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.0000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Cond Spur Ch.810

Mkr1 899 MHz

Ref 30 dBm

Atten 40 dB

-32.60 dBm

#Peak

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.00000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

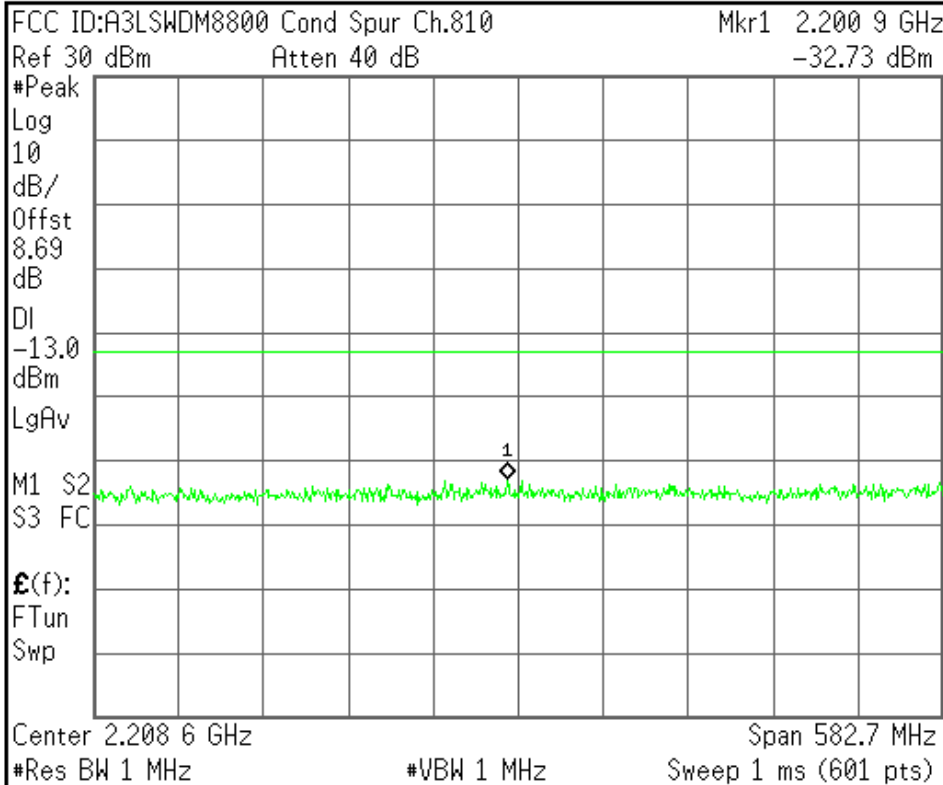

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

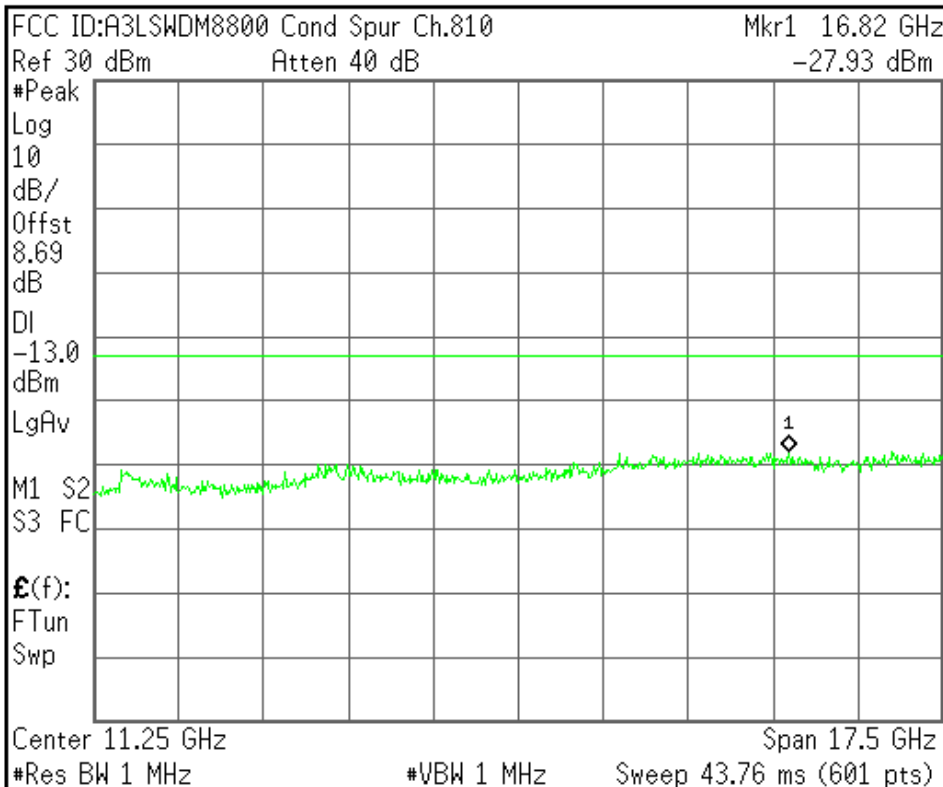

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

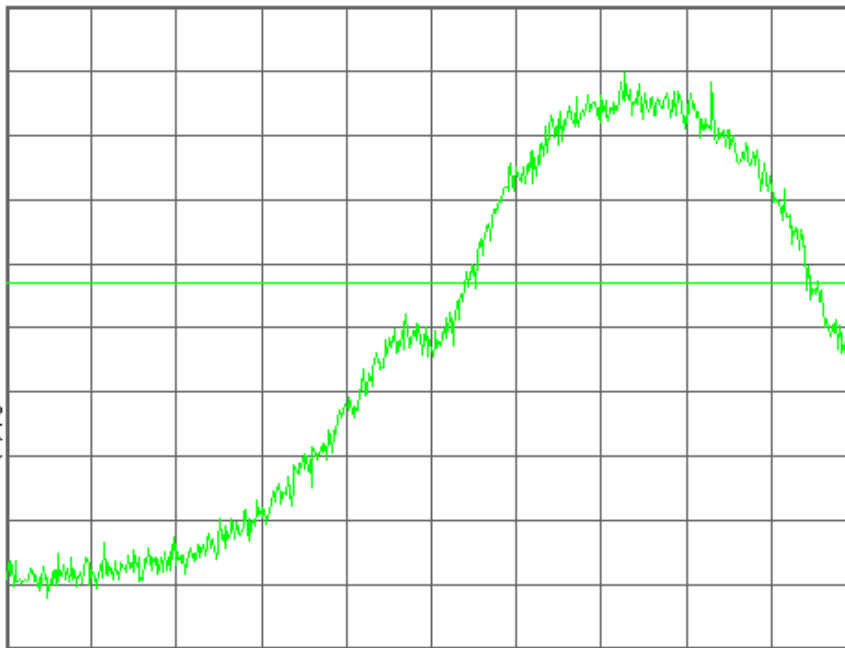

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.512

Mkr1 1.849 978 6 GHz

Ref 30 dBm

Atten 40 dB

-18.97 dBm

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

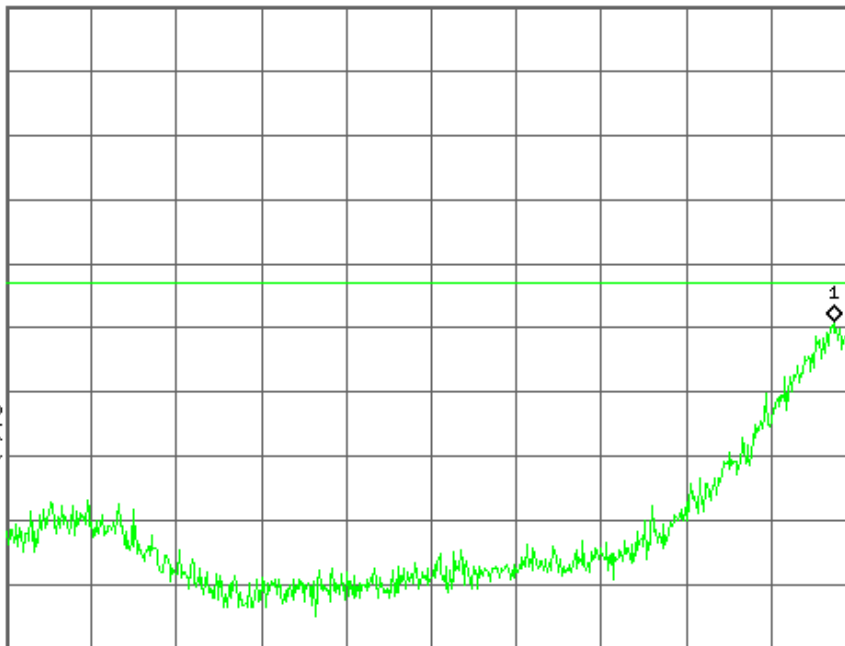

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

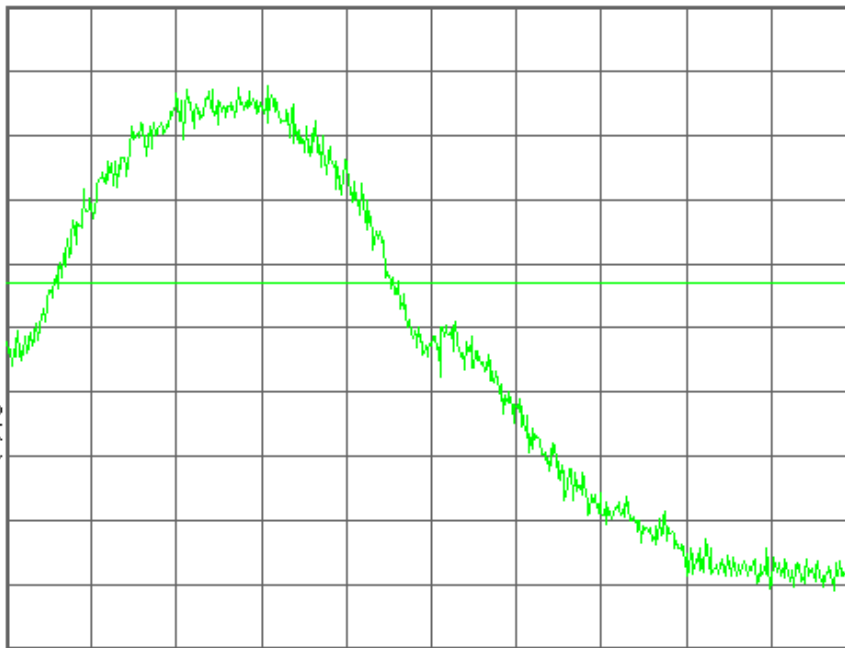

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.810

Mkr1 1.910 021 8 GHz

Ref 30 dBm

Atten 40 dB

-17.85 dBm

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

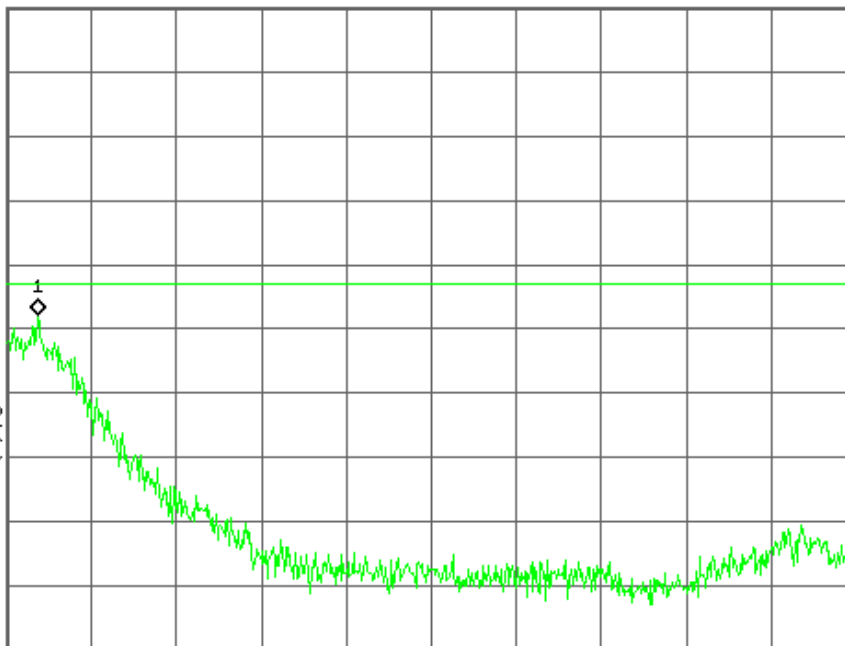

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz


Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

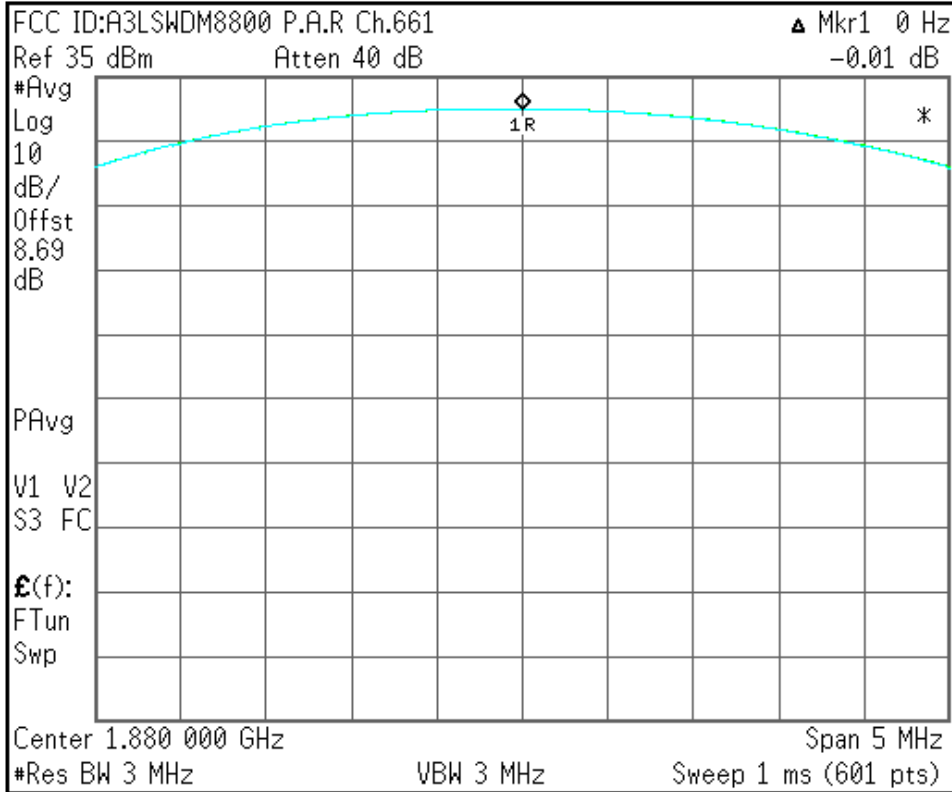

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

EDGE850



Agilent

R T

Freq/Channel

Ch Freq	824.2 MHz	Trig	Free
Occupied Bandwidth			

Center Freq
824.200000 MHz

Start Freq
823.700000 MHz

Stop Freq
824.700000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSWDM8800 0BW Ch.128 EDGE

Ref 27 dBm

Atten 30 dB

#Peak

Log


10

dB/

Offst

7.69

dB

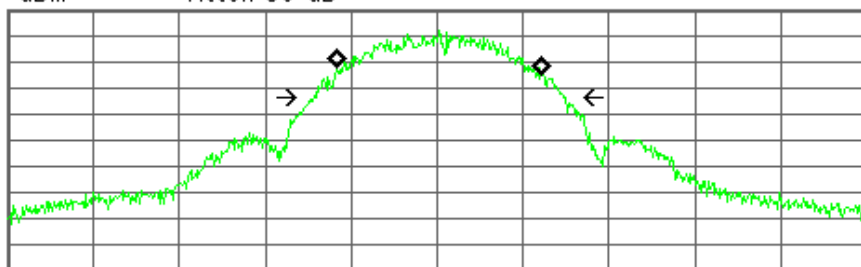

Start 823.700 MHz

Stop 824.700 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth

240.9446 kHz

Occ BW % Pwr 99.00 %**x dB** -26.00 dB**Transmit Freq Error**

2.162 kHz

x dB Bandwidth

297.912 kHz

File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

Ch Freq	836.6 MHz	Trig	Free
Occupied Bandwidth			

Center Freq
836.600000 MHz

Start Freq
836.100000 MHz

Stop Freq
837.100000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSWDM8800 0BW Ch.190 EDGE

Ref 27 dBm

Atten 30 dB

#Peak

Log


10

dB/

Offst

7.69

dB

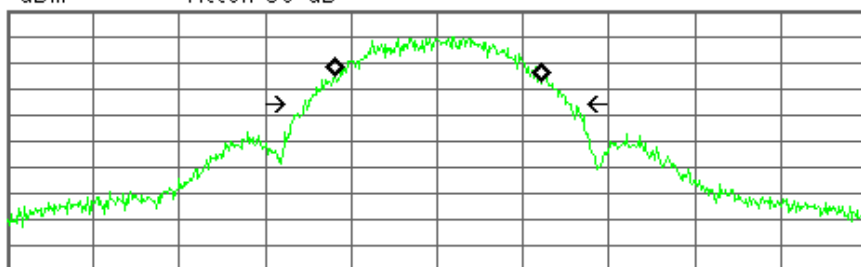

Start 836.100 MHz

Stop 837.100 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth

243.1969 kHz


Occ BW % Pwr 99.00 %**x dB** -26.00 dB**Transmit Freq Error**

834.962 Hz

x dB Bandwidth

311.182 kHz

File Operation Status, C:\TEMP.GIF file saved

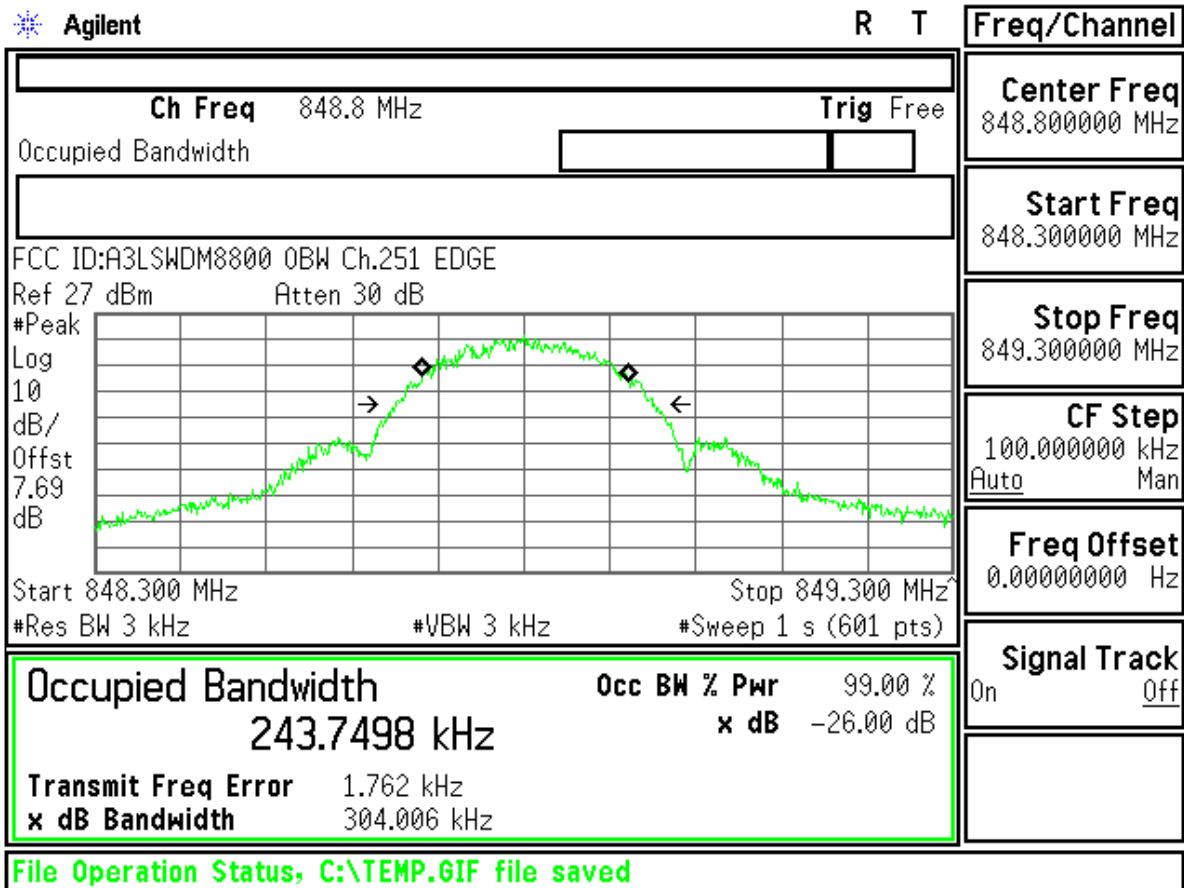

ID : A3LSWDM8800 Transmit Power 128CH EDGE

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Params		
EGPRS Transmit Power Setup ▾		EPSK Burst Power				EPSK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		25.63 dBm		26.83 dBm		26.24 dBm		26.26 dBm		GS1850		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		26.19 dBm		0.23 dBm		26.25 dBm		0.00 dBm		128		
		200 / 200								Single		
										HS TX Level ▾		
										Modulation Coding Scheme ▾		
1 of 2				Active Cell Transferring				Sys Type: EGPRS			1 of 2	
					IntRef	Offset	R	T				

Measurement/Instrument Screen													
Control		EGPRS Transmit Power								PDCH Params			
EGPRS Transmit Power Setup ▾		EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾			
		Minimum		Maximum		Minimum		Maximum		Traffic Band			
		25.30 dBm		26.62 dBm		26.11 dBm		26.14 dBm		GSN850			
		Average		Std Dev		Average		Std Dev		Traffic Channel			
		26.04 dBm		0.23 dBm		26.12 dBm		0.01 dBm		190			
		200 / 200								Single			
										HS TX Level ▾			
										Modulation Coding Scheme ▾			
										Return			
				Active Cell Transferring				Sys Type: EGPRS					
						IntRef		Offset		R T			
1 of 2												1 of 2	

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Params		
EGPRS Transmit Power Setup ▾		EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		25.09 dBm		26.41 dBm		25.88 dBm		25.90 dBm		GSN850		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.83 dBm		0.24 dBm		25.89 dBm		0.00 dBm		251		
		200 / 200								Single		
		</										

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.128 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

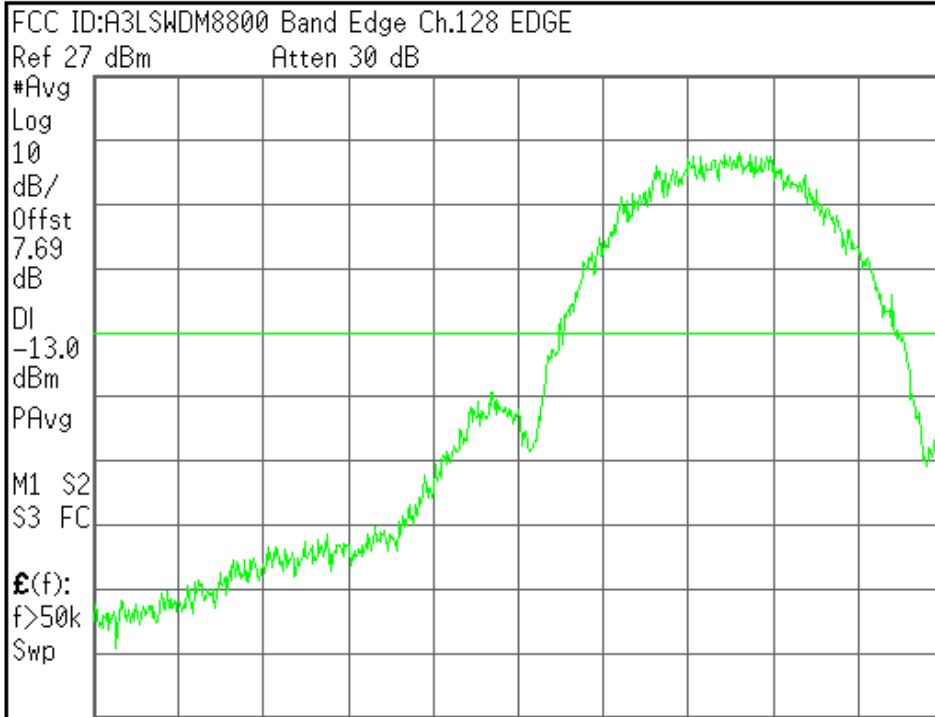

Start 823.595 0 MHz

Stop 824.405 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.128 EDGE

Mkr1 823.981 3 MHz

Ref 27 dBm

Atten 30 dB

-23.05 dBm

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

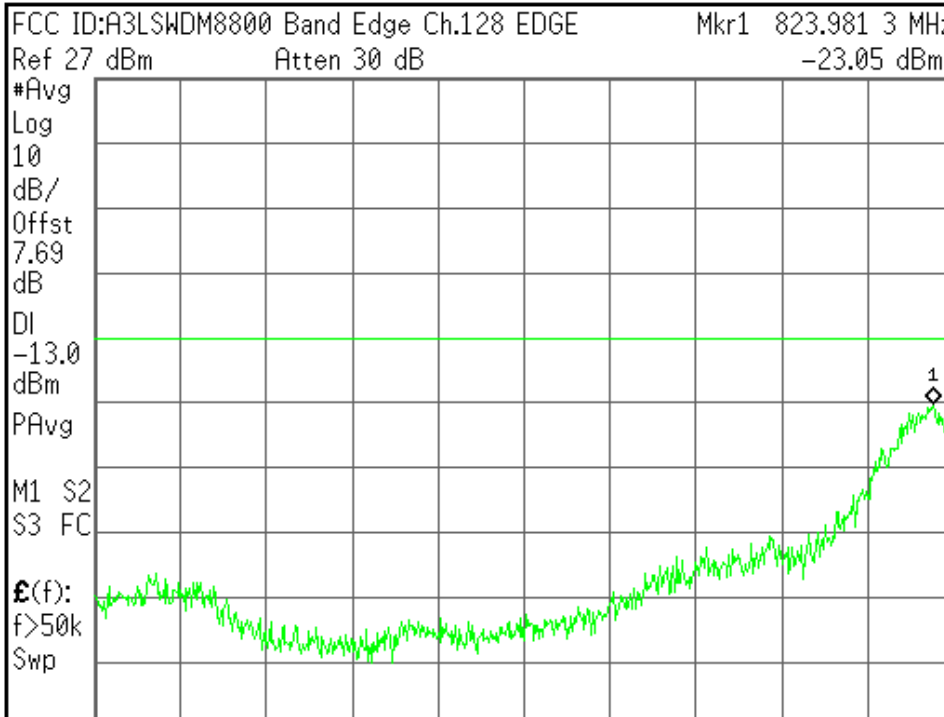

Start 823.190 0 MHz

Stop 824.000 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.251 EDGE

Ref 27 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

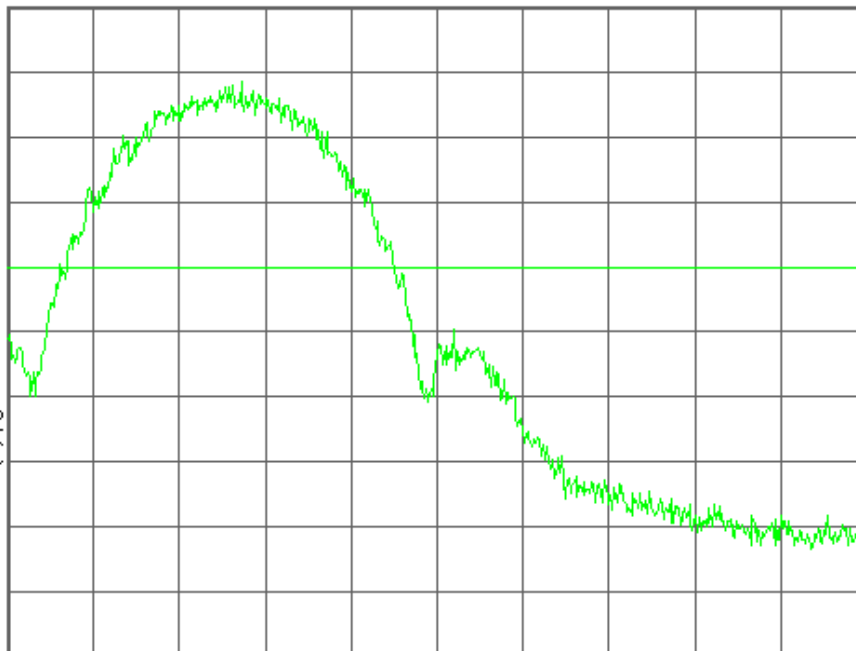

Start 848.595 0 MHz

Stop 849.405 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.251 EDGE

Ref 27 dBm

Atten 30 dB

Mkr1 849.032 1 MHz

-22.87 dBm

#Avg

Log

10

dB/

Offst

7.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

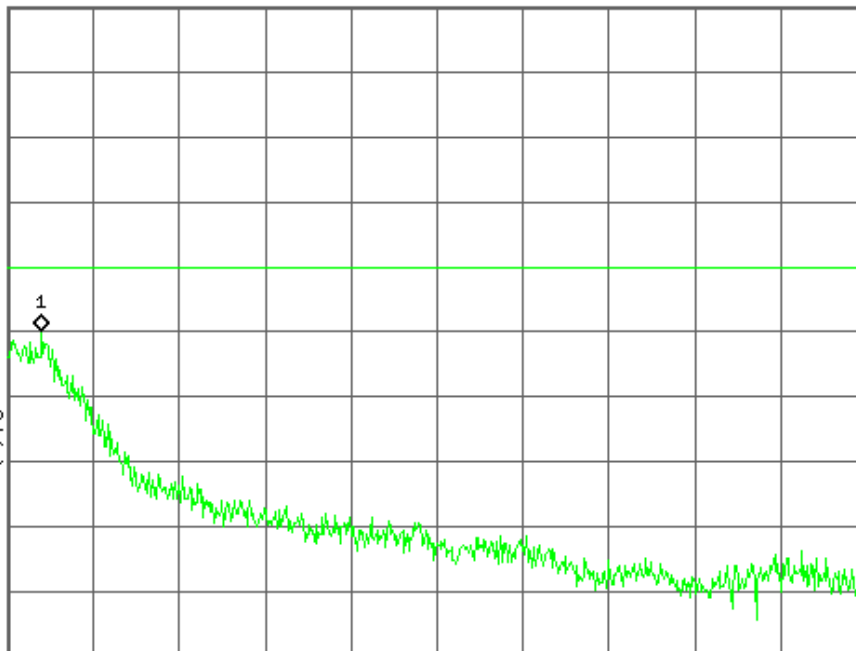

Start 849.000 0 MHz

Stop 849.810 0 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


EDGE1900



Agilent

R T


Freq/Channel

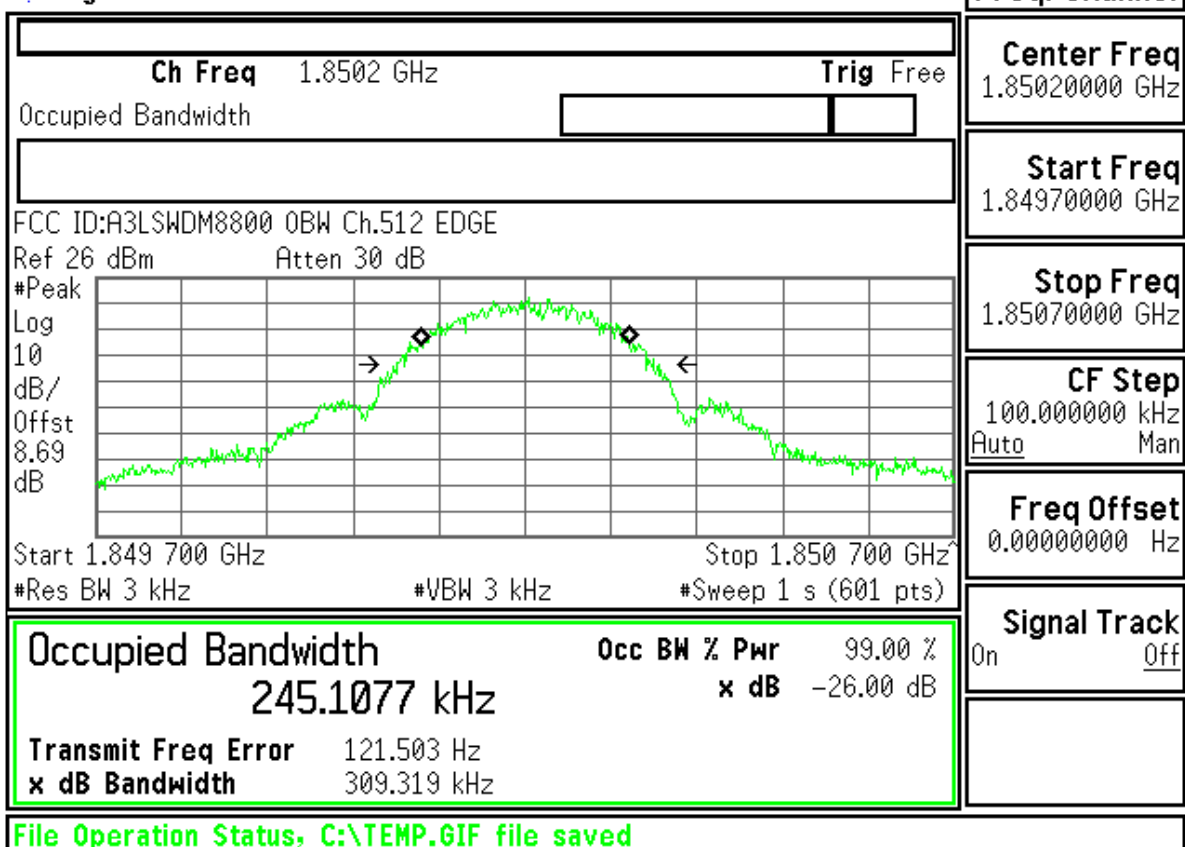
Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Agilent

R T

Freq/Channel

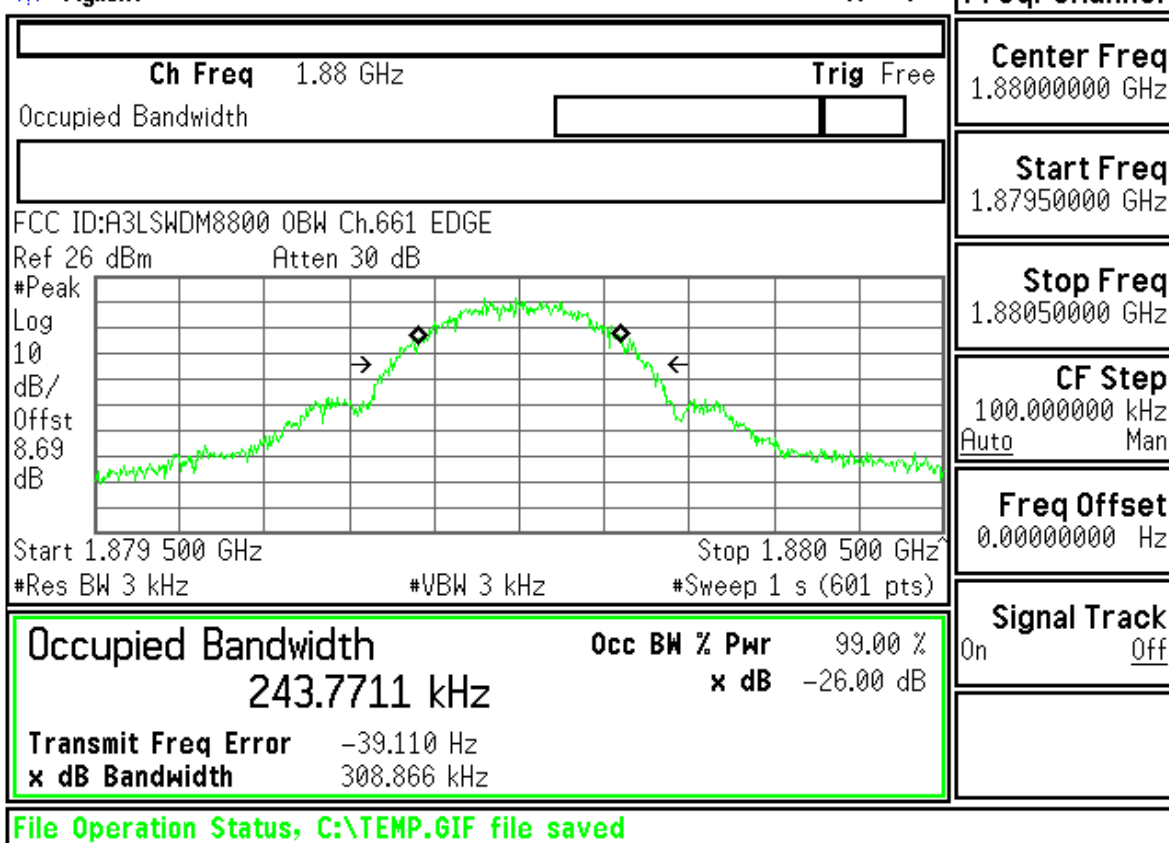Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

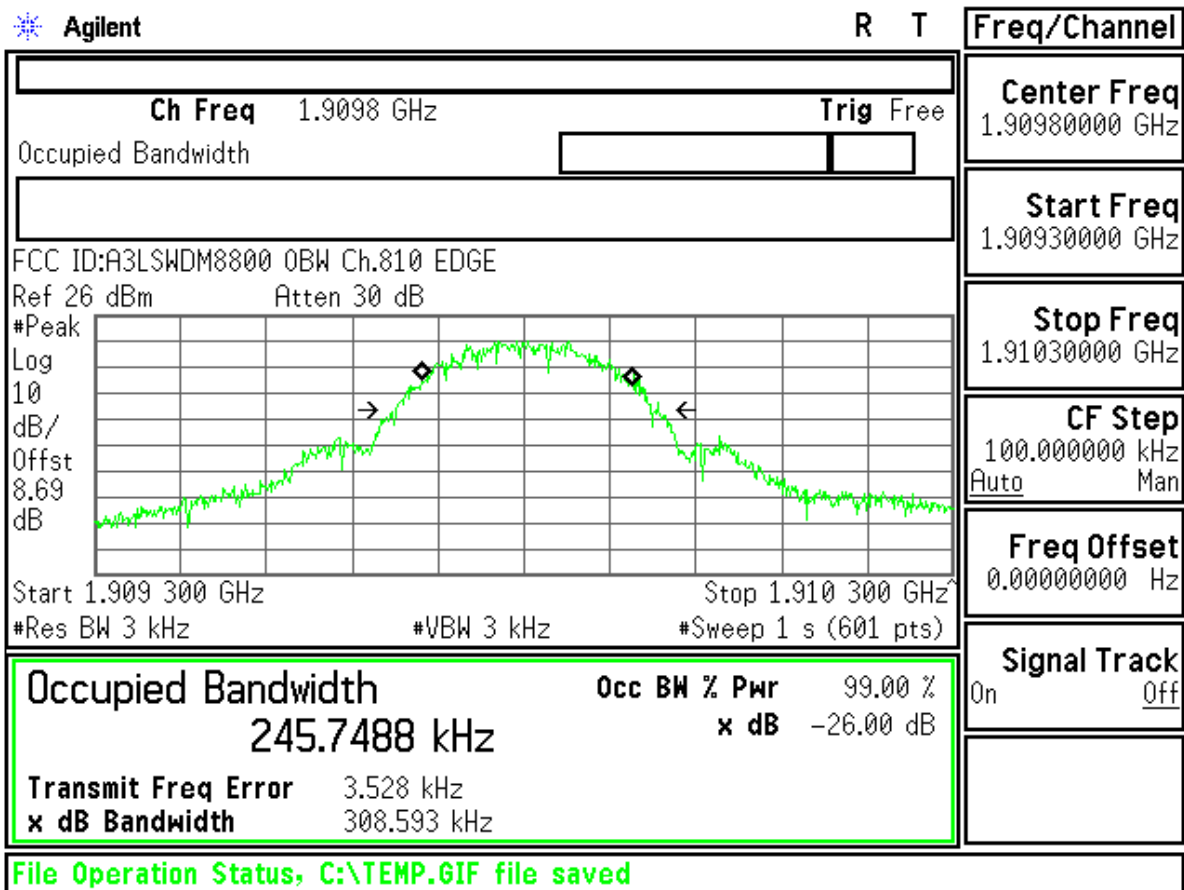

ID : A3LSWDM8800 Transmit Power 512CH EDGE

Measurement/Instrument Screen													
Control		EGPRS Transmit Power								PDCH Params			
EGPRS Transmit Power Setup ▾	EPSS Burst Power				EPSS Est Carrier Power				Downlink Traffic Power				
	Minimum		Maximum		Minimum		Maximum		Traffic Band				
	24.47 dBm		25.66 dBm		25.16 dBm		25.18 dBm		PCS				
	Average		Std Dev		Average		Std Dev		Traffic Channel				
	25.10 dBm		0.25 dBm		25.17 dBm		0.00 dBm		512				
	200 /200								Single				
									HS TX Level				
				Active Cell Transferring				Modulation Coding Scheme					
				Sys Type: EGPRS				Return					
1 of 2				IntRef		Offset		R T				1 of 2	

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Params		
EGPRS Transmit Power Setup ▾		EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		24.43 dBm		25.77 dBm		25.09 dBm		25.11 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.05 dBm		0.22 dBm		25.10 dBm		0.00 dBm		661		
		200 / 200								Single		

Measurement/Instrument Screen												
Control		EGPRS Transmit Power										PDCH Params
EGPRS Transmit Power Setup ▾		EP SK Burst Power					EP SK Est Carrier Power					Downlink Traffic Power ▾
		Minimum		Maximum			Minimum		Maximum			Traffic Band
		24.01 dBm		25.43 dBm			24.75 dBm		24.78 dBm			PCS
		Average		Std Dev			Average		Std Dev			Traffic Channel
		24.72 dBm		0.23 dBm			24.77 dBm		0.00 dBm			810
		200 / 200										Single
												NS TX Level ▾
												Modulation Coding Scheme ▾
												Return
				Active Cell Transferring					Sys Type: EGPRS			
1 of 2						IntRef	Offset	R	T			1 of 2

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

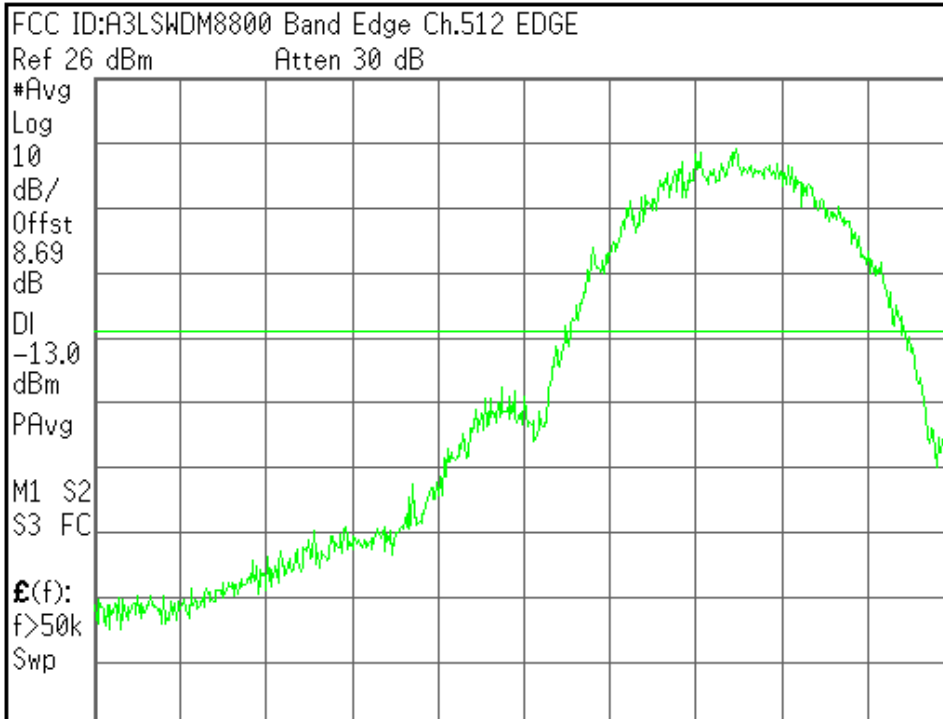

Start 1.849 595 0 GHz

Stop 1.850 405 0 GHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

Mkr1 1.849 988 0 GHz

-22.91 dBm

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

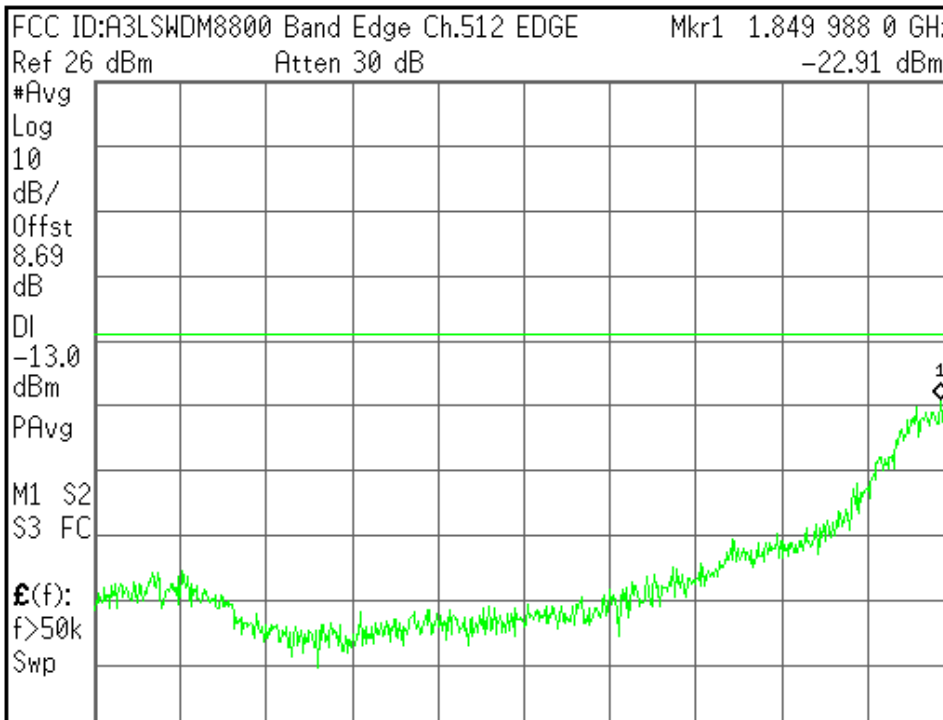

Start 1.849 190 0 GHz

Stop 1.850 000 0 GHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.810 EDGE

Ref 26 dBm Atten 30 dB

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

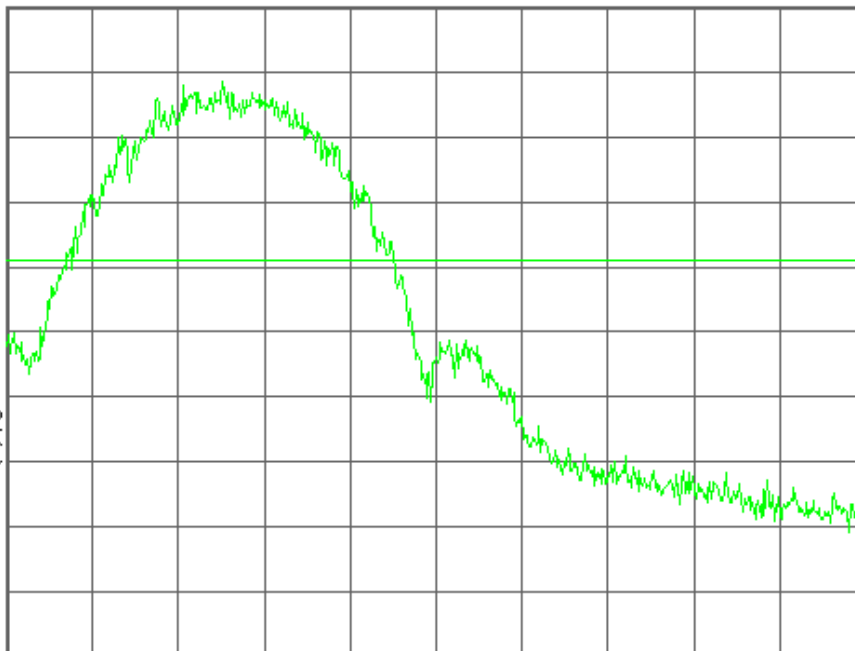

Start 1.909 595 0 GHz

Stop 1.910 405 0 GHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM8800 Band Edge Ch.810 EDGE

Ref 26 dBm Atten 30 dB

Mkr1 1.910 000 9 GHz

-25.15 dBm

#Avg

Log

10

dB/

Offst

8.69

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

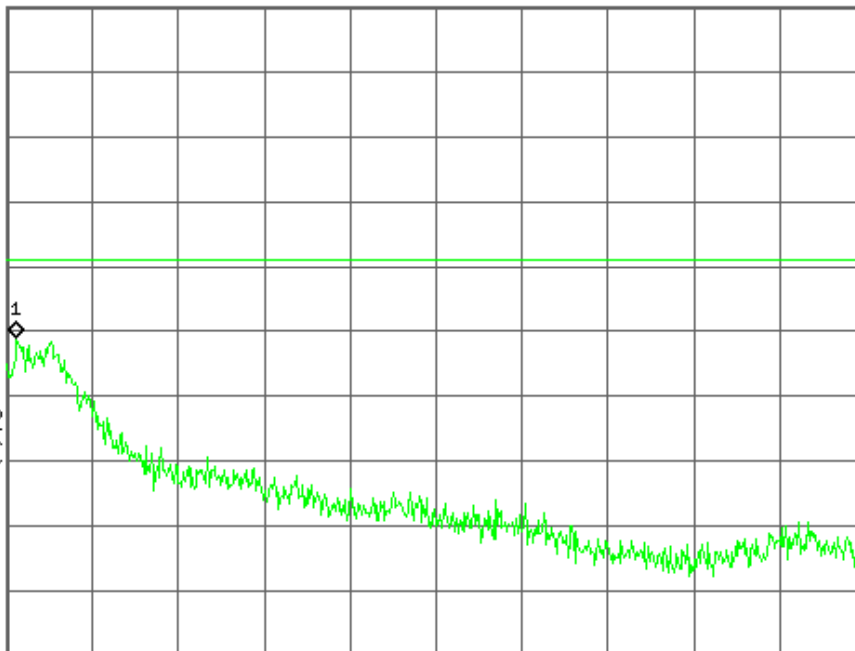

Start 1.910 000 0 GHz

Stop 1.910 810 0 GHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

FCC ID:A3LSWDM8800 P.A.R Ch.661 EDGE

▲ Mkr1 0 Hz

Ref 35 dBm

Atten 40 dB

-0.06 dB

#Avg

Log

10

dB/

Offst

8.69

dB

PAvg


V1 V2

S3 FC

£(f):

FTun

Swp

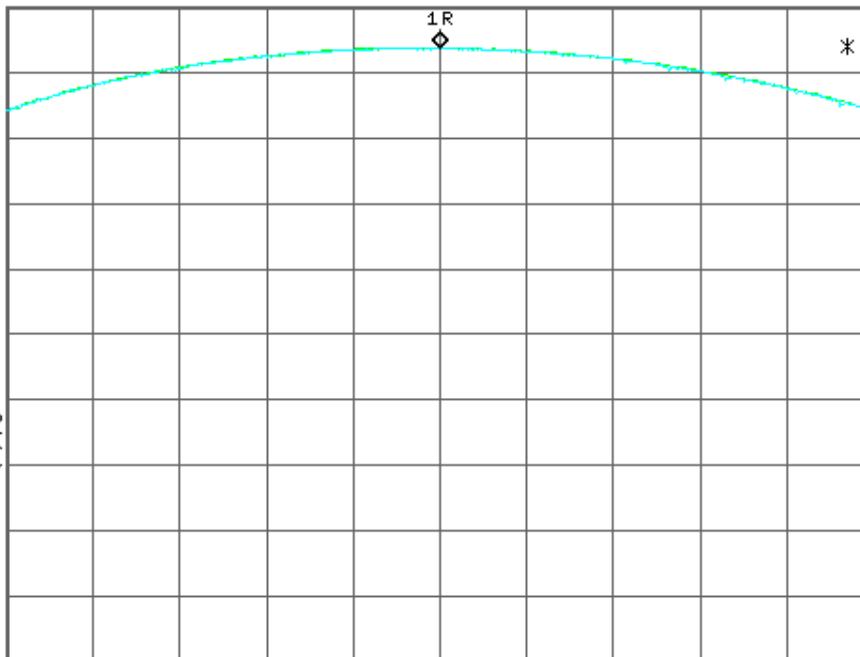

Center 1.880 000 GHz

Span 5 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies