


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

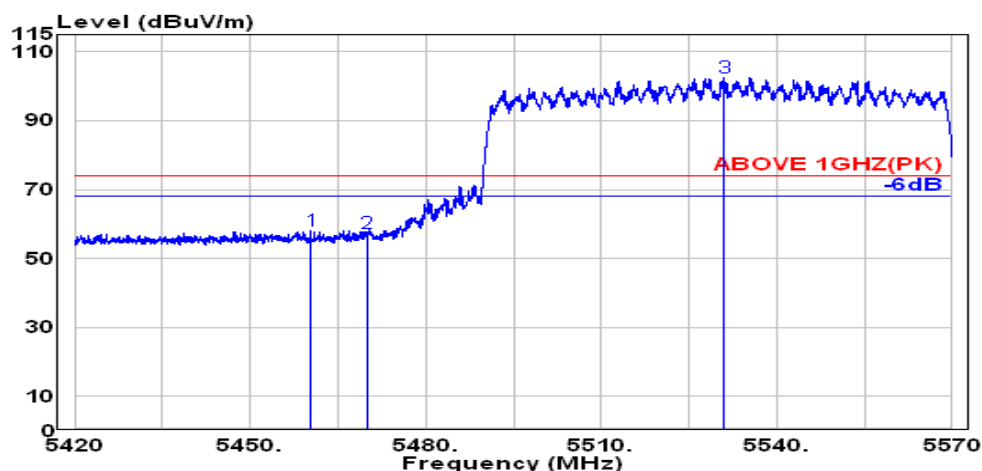

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.10	8.66	39.07	54.52	58.20	74.00	15.80	Peak
5470.000	34.10	8.67	39.07	53.52	57.22	74.00	16.78	Peak
@ 5531.000	34.04	8.73	39.08	98.68	102.36	---	---	Peak

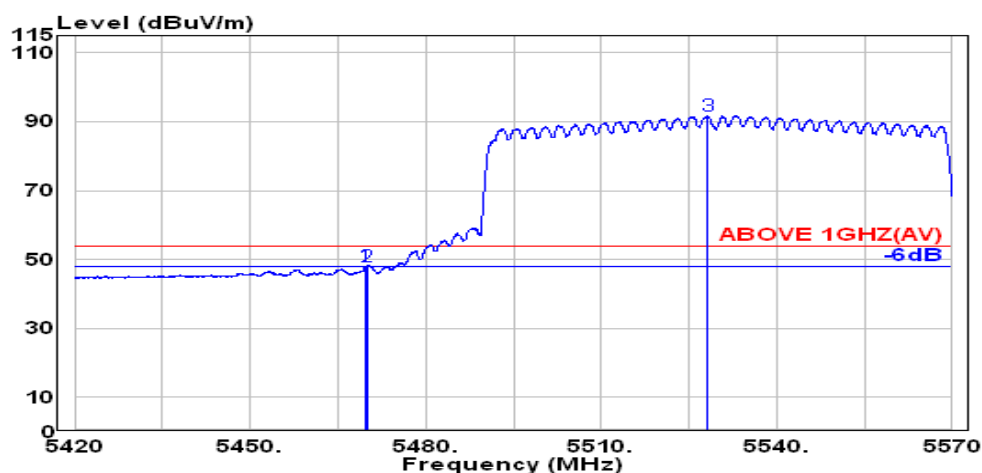


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.10	8.67	39.07	44.19	47.89	54.00	6.11	Average
5470.000	34.10	8.67	39.07	44.41	48.10	54.00	5.90	Average
@ 5528.200	34.04	8.73	39.08	88.08	91.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

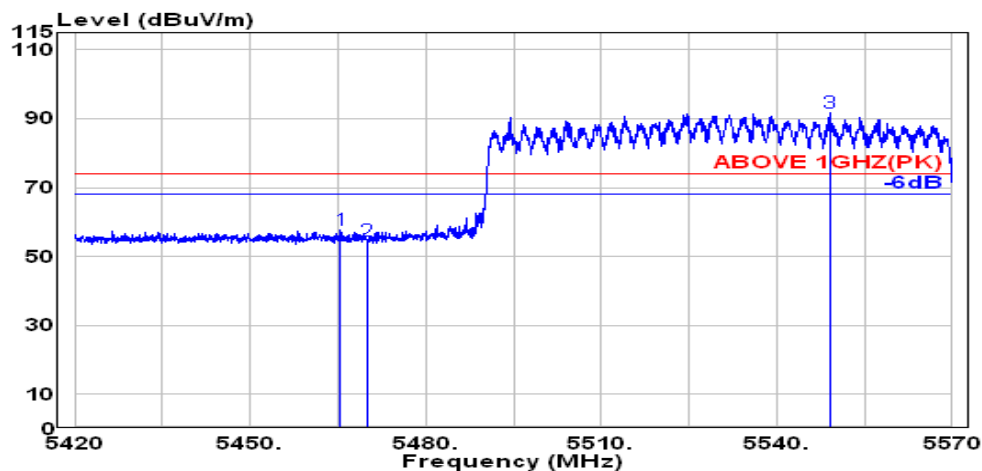

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.450	34.10	8.66	39.07	53.89	57.59	74.00	16.41	Peak
5470.000	34.10	8.67	39.07	50.70	54.40	74.00	19.60	Peak
@ 5549.000	34.00	8.75	39.09	88.12	91.78	---	---	Peak

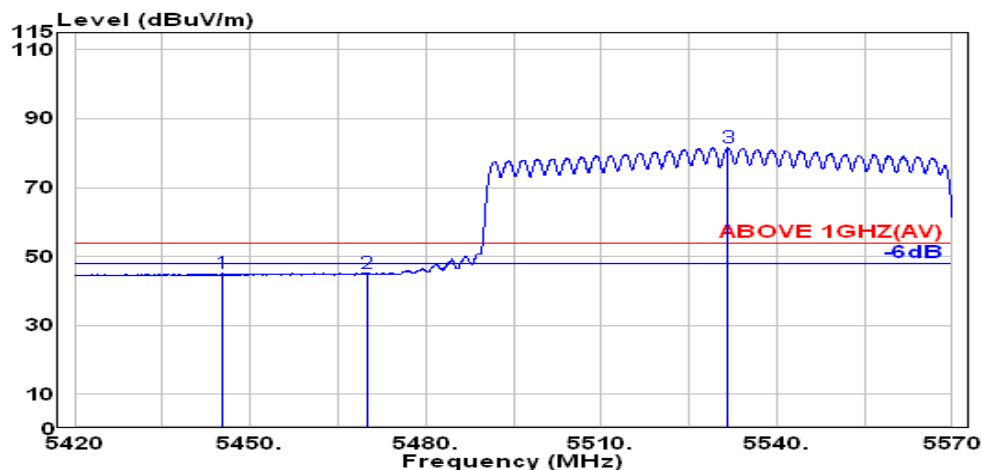

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.150	34.09	8.64	39.07	41.46	45.12	54.00	8.88	Average
5470.000	34.10	8.67	39.07	41.33	45.03	54.00	8.97	Average
@ 5531.550	34.04	8.73	39.08	77.93	81.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

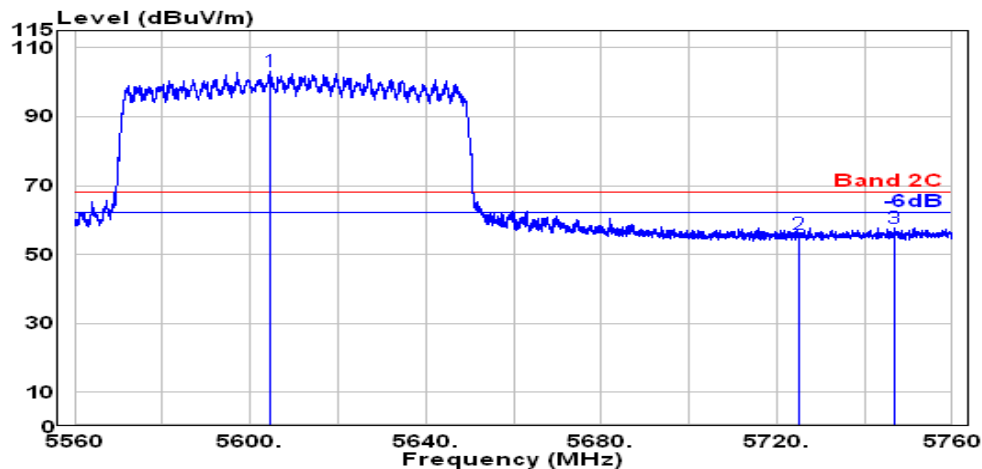

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5604.500	33.79	8.80	39.10	99.77	103.26	---	---	Peak
5725.000	33.60	8.92	39.14	52.59	55.98	68.20	12.22	Peak
5746.800	33.77	8.95	39.15	54.17	57.74	68.20	10.46	Peak

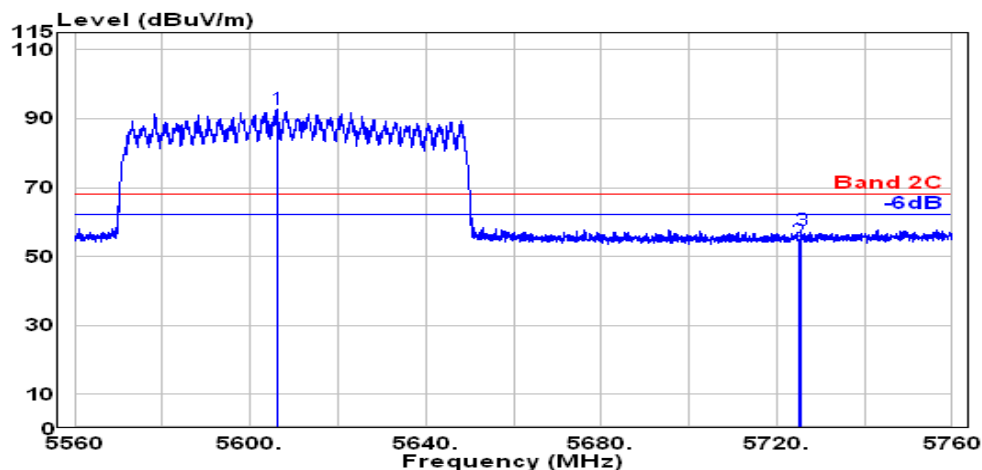

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.000	33.79	8.81	39.10	89.12	92.62	---	---	Peak
5725.000	33.60	8.92	39.14	51.24	54.63	68.20	13.57	Peak
5725.550	33.60	8.93	39.14	54.35	57.74	68.20	10.46	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

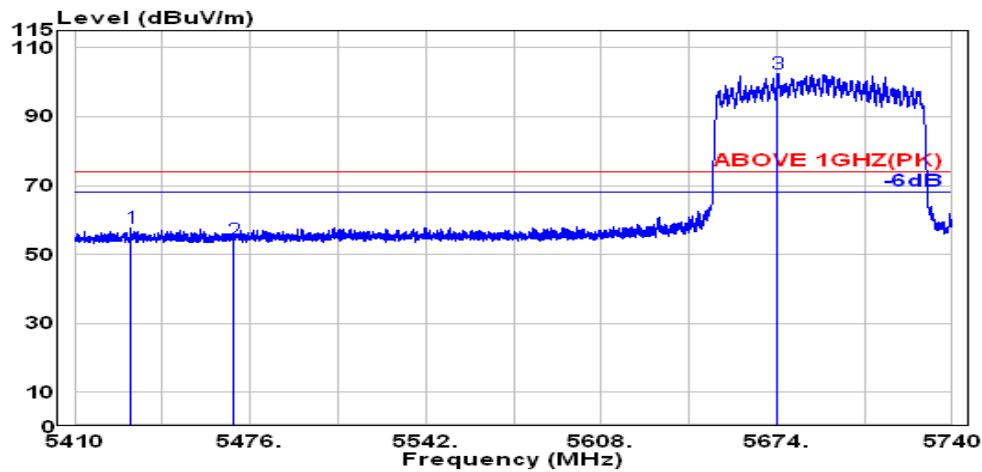

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.000	34.06	8.63	39.07	54.14	57.75	74.00	16.25	Peak
5470.000	34.10	8.67	39.07	50.48	54.17	74.00	19.83	Peak
@ 5674.400	33.55	8.87	39.12	99.14	102.44	---	---	Peak

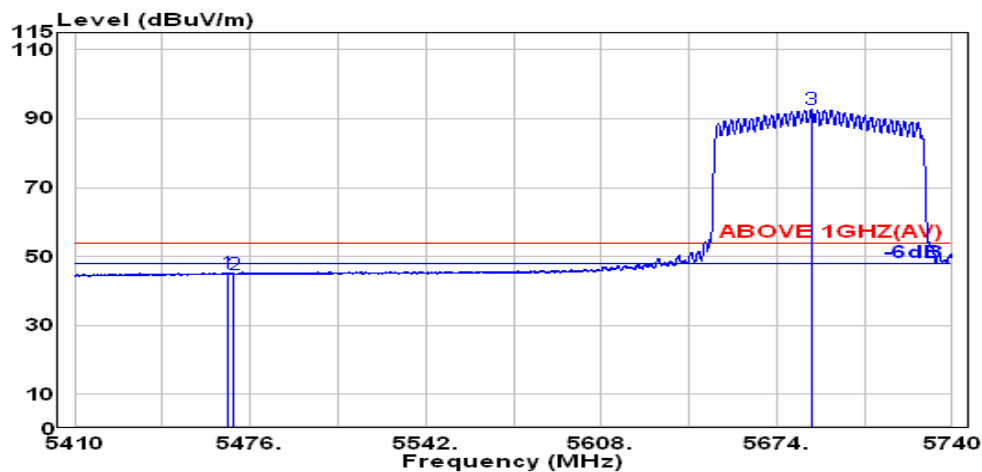

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.450	34.10	8.66	39.07	41.54	45.23	54.00	8.77	Average
5470.000	34.10	8.67	39.07	41.08	44.77	54.00	9.23	Average
@ 5687.000	33.48	8.89	39.13	89.52	92.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

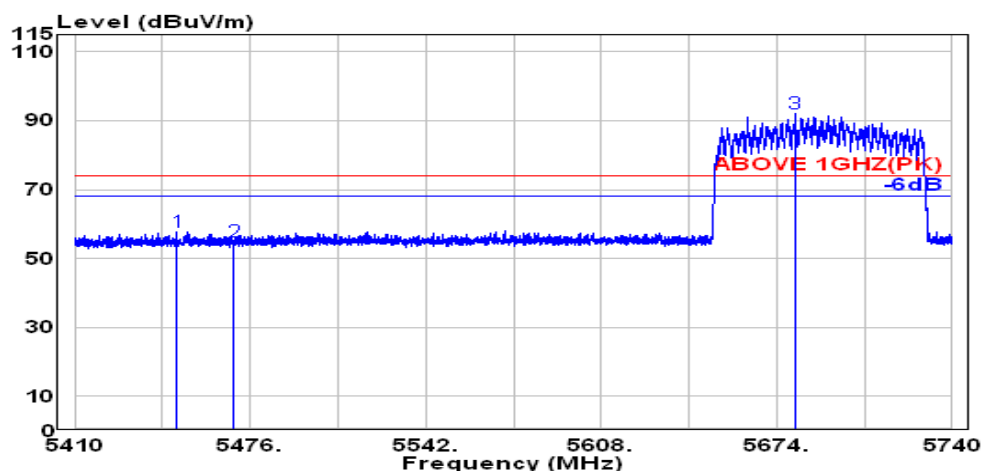

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.300	34.10	8.65	39.07	54.18	57.85	74.00	16.15	Peak
5470.000	34.10	8.67	39.07	51.13	54.83	74.00	19.17	Peak
@ 5680.850	33.51	8.88	39.13	88.82	92.09	---	---	Peak

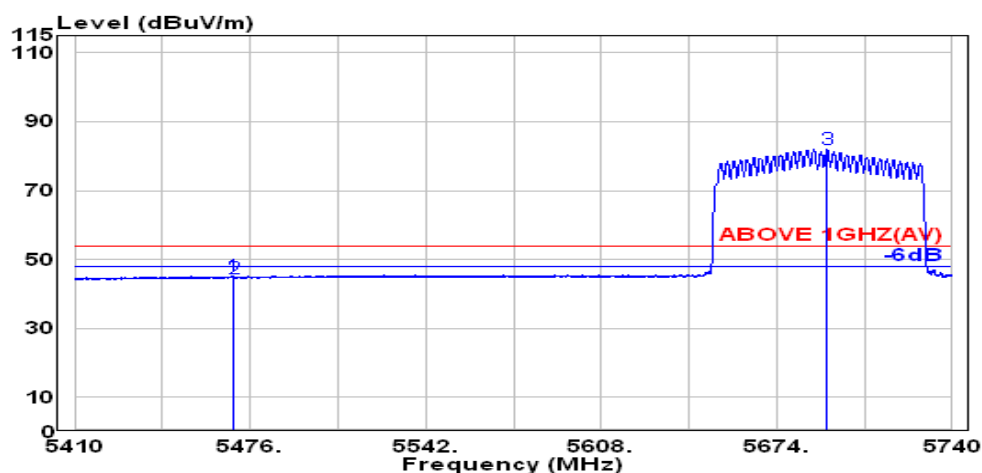

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.350	34.10	8.67	39.07	41.36	45.06	54.00	8.94	Average
5470.000	34.10	8.67	39.07	40.95	44.65	54.00	9.35	Average
@ 5692.750	33.44	8.89	39.13	78.67	81.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

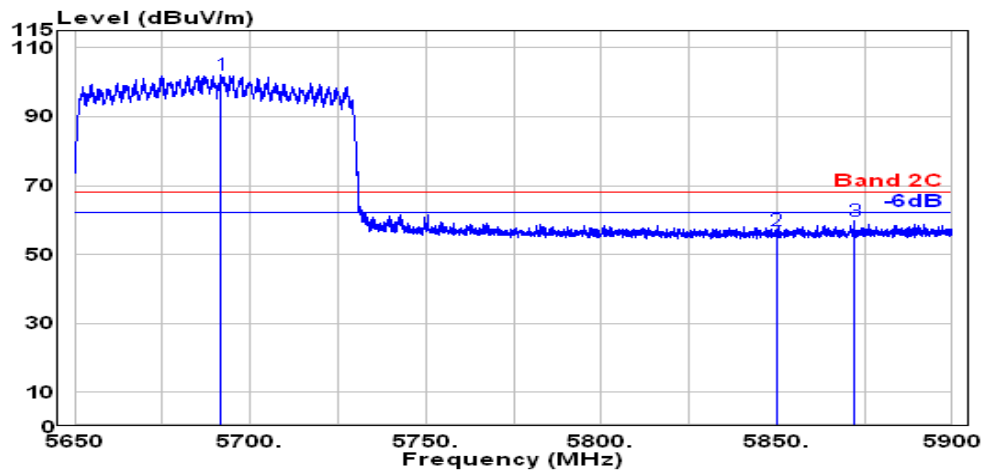

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5691.600	33.45	8.89	39.13	98.99	102.21	---	---	Peak
5850.000	33.90	9.05	39.18	53.33	57.10	68.20	11.10	Peak
5872.050	34.03	9.07	39.18	55.94	59.86	68.20	8.34	Peak

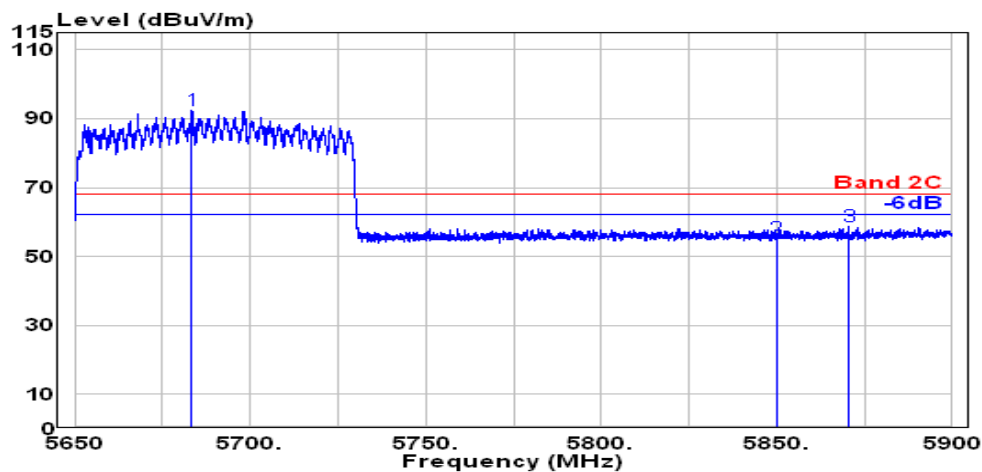

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.400	33.50	8.88	39.13	89.00	92.26	---	---	Peak
5850.000	33.90	9.05	39.18	51.56	55.33	68.20	12.87	Peak
5870.500	34.02	9.07	39.18	54.67	58.58	68.20	9.62	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

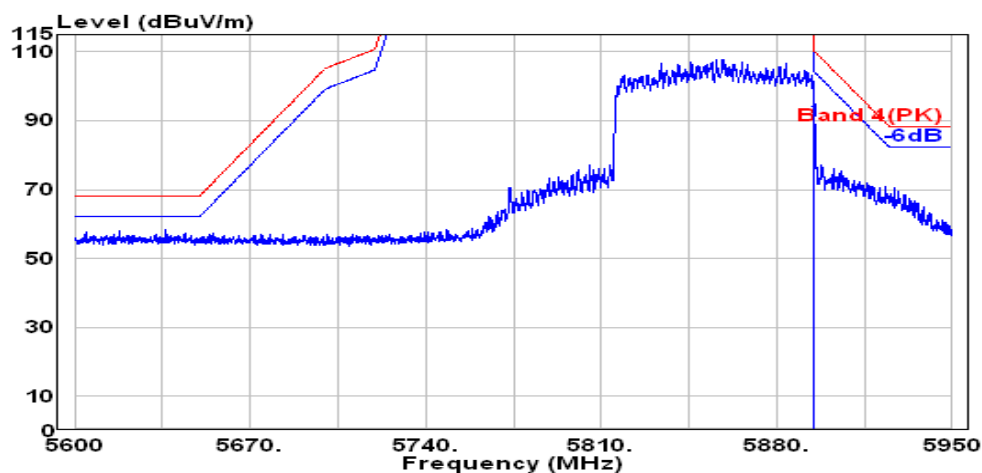

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	85.92	89.99	110.16	20.17	Peak

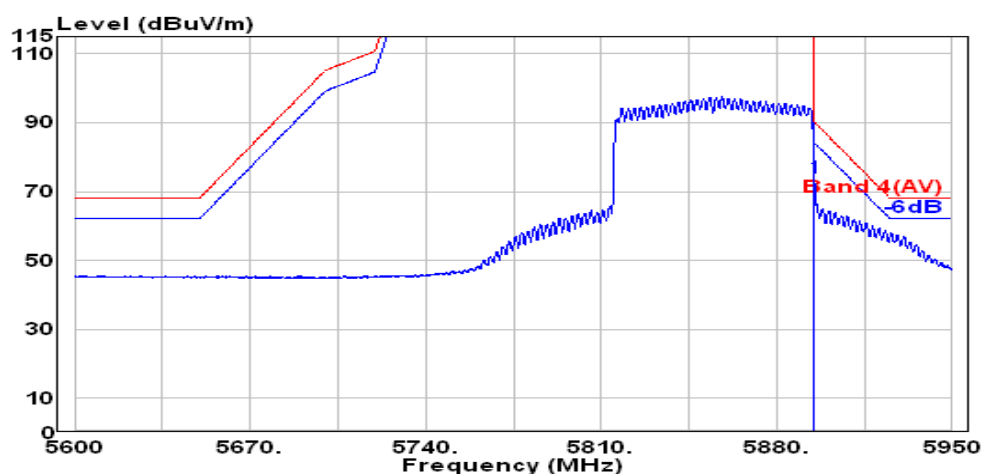


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	69.96	74.03	90.16	16.13	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

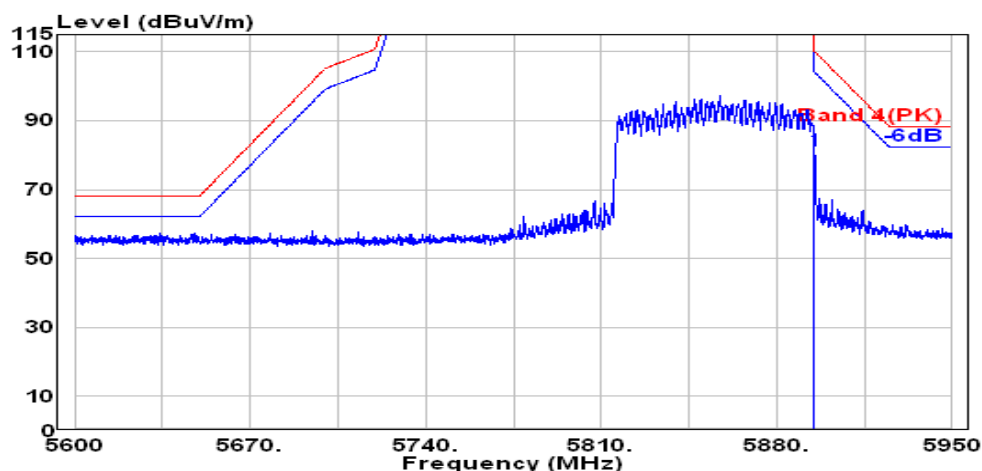

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	77.31	81.38	110.16	28.78	Peak

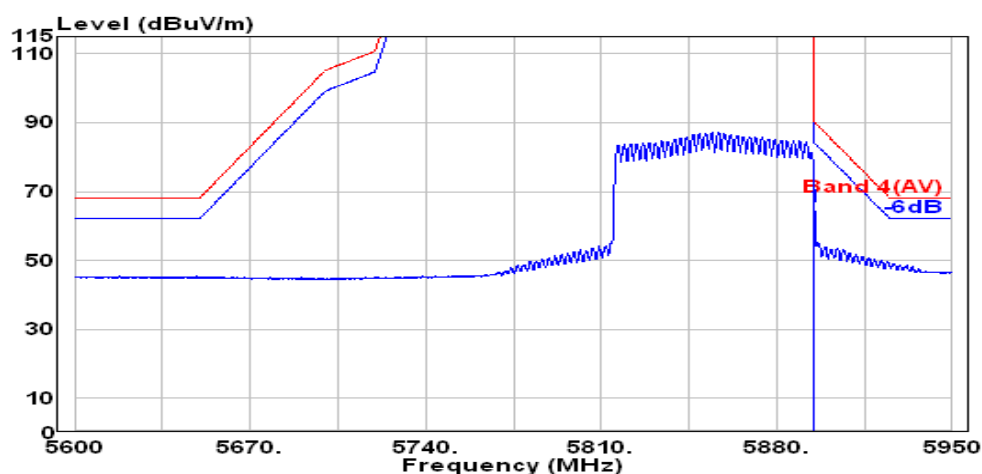

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	61.72	65.79	90.16	24.37	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

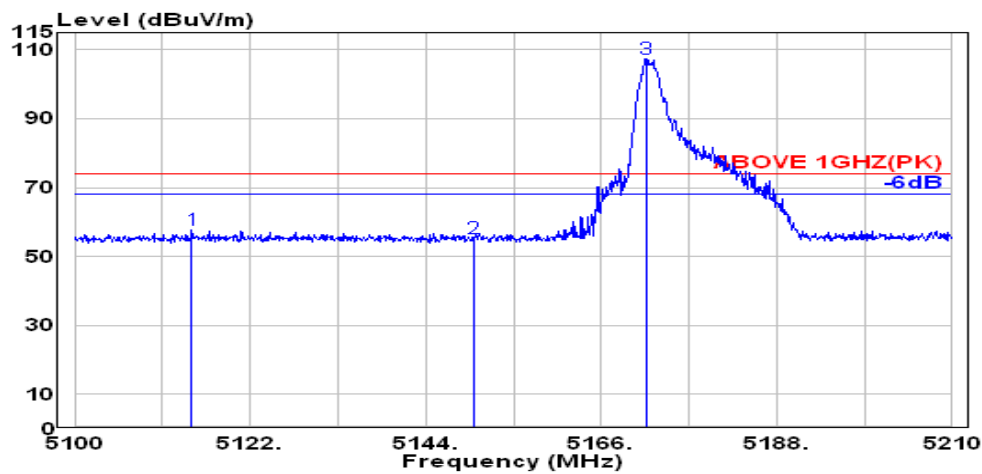

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.700	33.53	8.29	39.09	55.02	57.74	74.00	16.26	Peak
5150.000	33.60	8.33	39.09	52.55	55.39	74.00	18.61	Peak
@ 5171.600	33.60	8.35	39.09	104.59	107.45	---	---	Peak

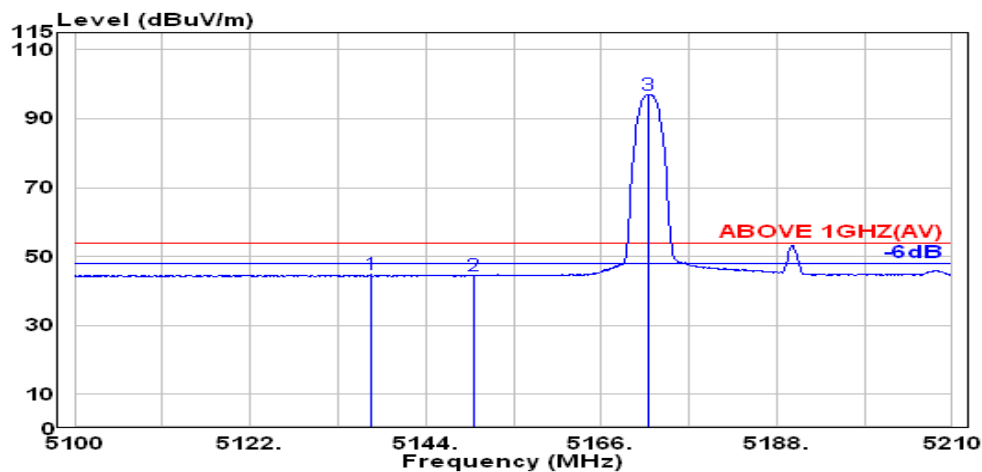

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.100	33.57	8.31	39.09	41.87	44.66	54.00	9.34	Average
5150.000	33.60	8.33	39.09	41.55	44.39	54.00	9.61	Average
@ 5171.800	33.60	8.35	39.09	94.25	97.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

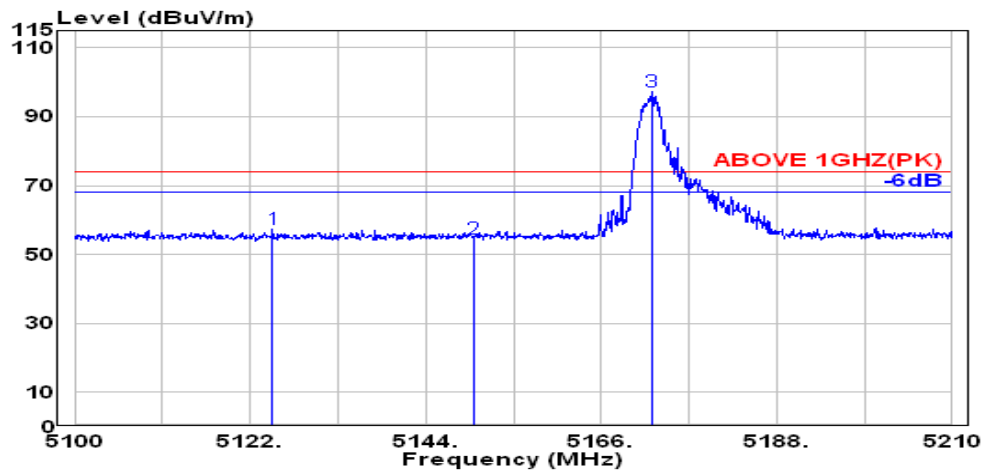

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.800	33.55	8.30	39.09	54.47	57.23	74.00	16.77	Peak
5150.000	33.60	8.33	39.09	51.61	54.44	74.00	19.56	Peak
@ 5172.300	33.60	8.35	39.09	94.53	97.40	---	---	Peak

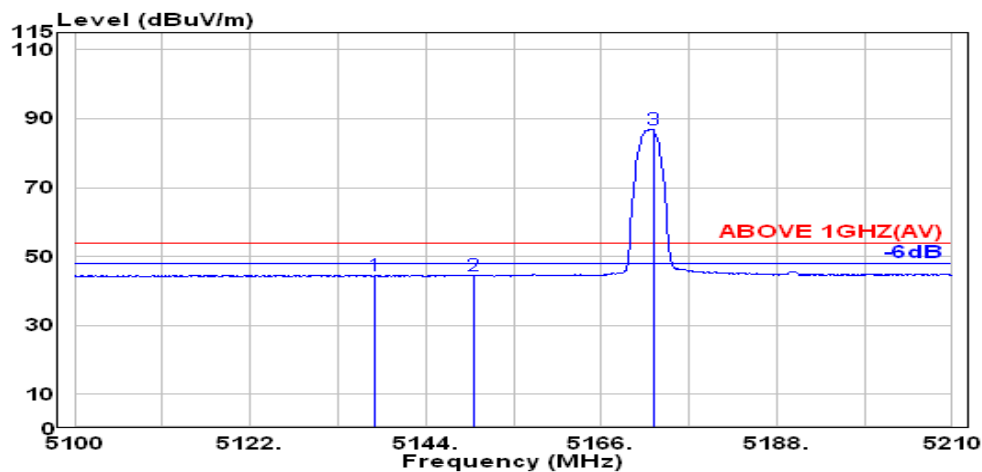

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.500	33.58	8.31	39.09	41.85	44.65	54.00	9.35	Average
5150.000	33.60	8.33	39.09	41.51	44.34	54.00	9.66	Average
@ 5172.500	33.60	8.35	39.09	84.17	87.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

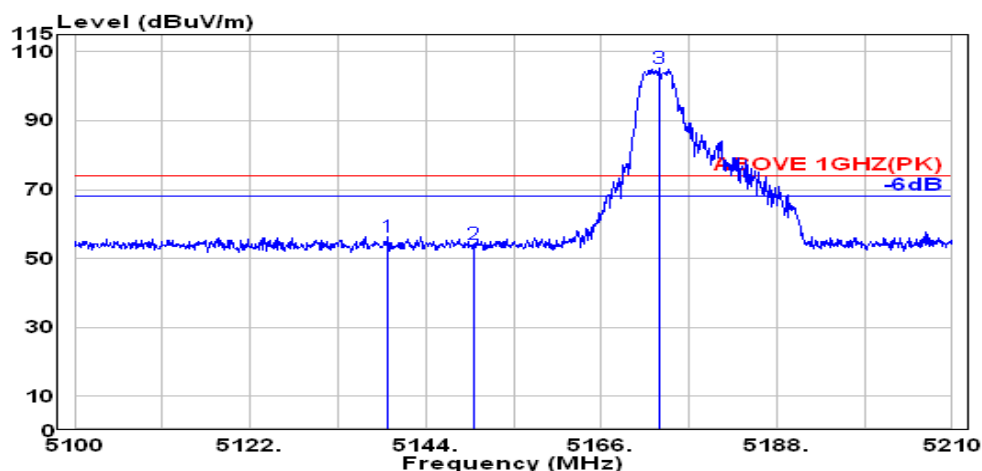

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.200	33.58	8.32	39.09	53.61	56.42	74.00	17.58	Peak
5150.000	33.60	8.33	39.09	51.37	54.21	74.00	19.79	Peak
@ 5173.200	33.60	8.35	39.09	102.56	105.42	---	---	Peak

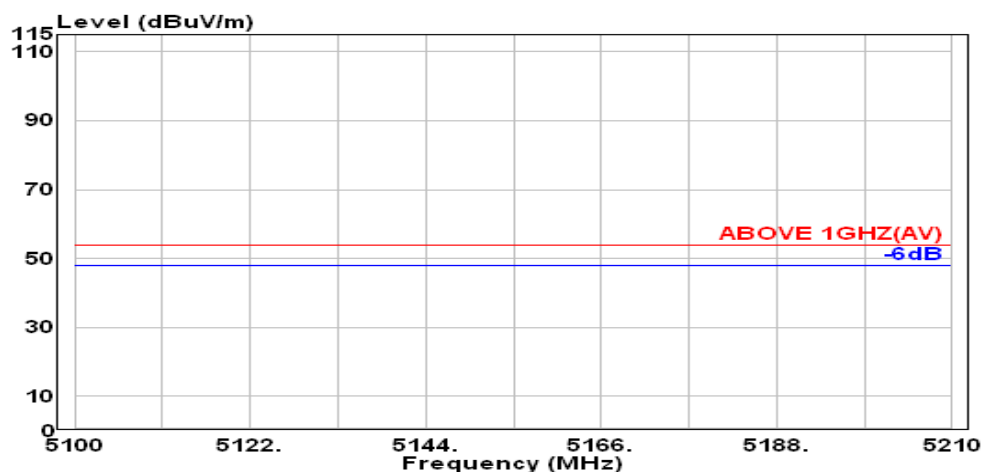

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	33.50	8.27	39.09	-493.50	-490.82	54.00	544.82	Average
5100.000	33.50	8.27	39.09	-493.50	-490.82	54.00	544.82	Average
@ 5150.000	33.60	8.33	39.09	-493.51	-490.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

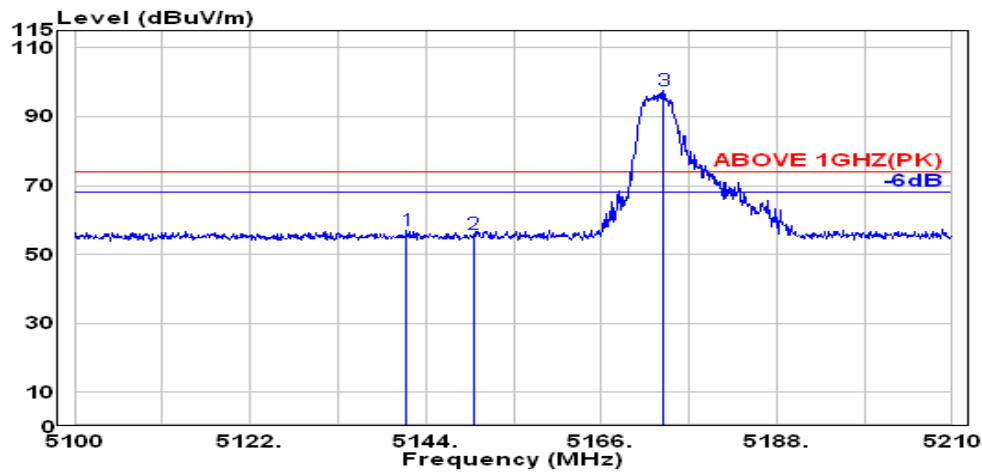

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.58	8.32	39.09	54.04	56.85	74.00	17.15	Peak
5150.000	33.60	8.33	39.09	52.95	55.79	74.00	18.21	Peak
@ 5173.800	33.60	8.35	39.09	94.74	97.60	---	---	Peak

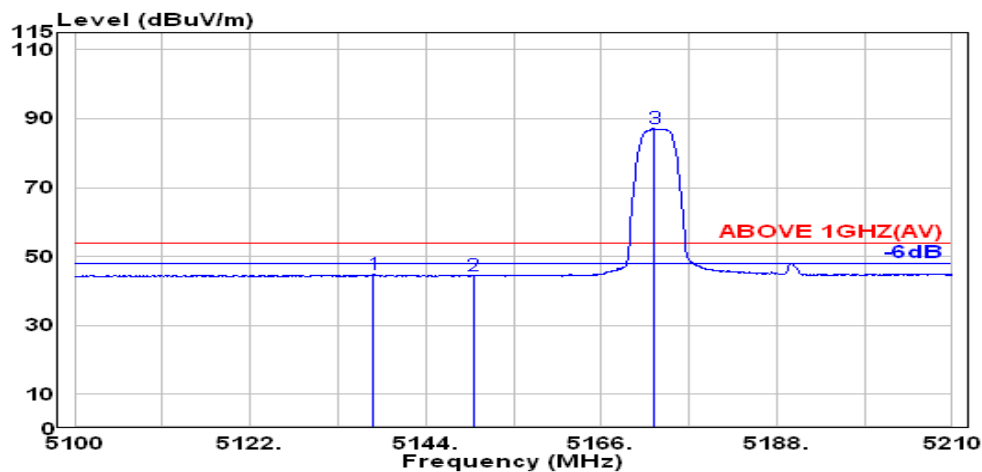

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.400	33.57	8.31	39.09	42.04	44.84	54.00	9.16	Average
5150.000	33.60	8.33	39.09	41.70	44.53	54.00	9.47	Average
@ 5172.600	33.60	8.35	39.09	84.45	87.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

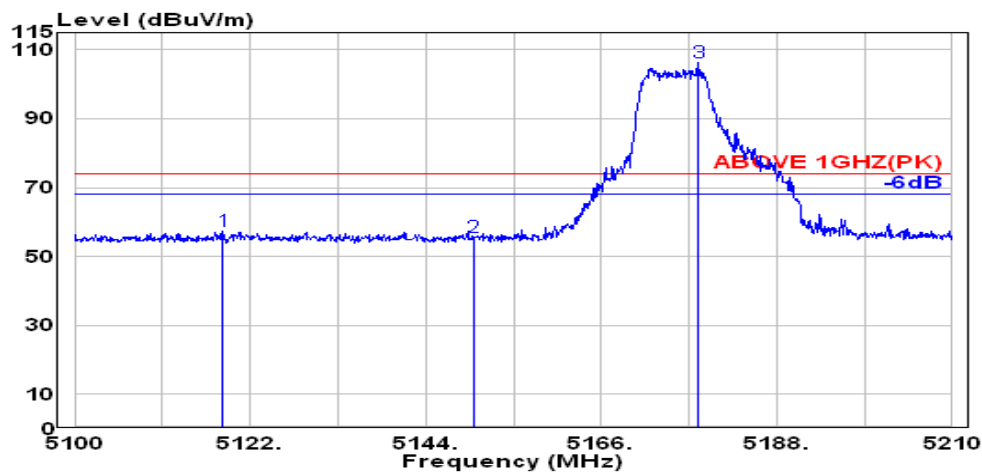

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.600	33.54	8.29	39.09	54.50	57.23	74.00	16.77	Peak
5150.000	33.60	8.33	39.09	52.92	55.76	74.00	18.24	Peak
@ 5178.200	33.60	8.36	39.09	103.43	106.30	---	---	Peak

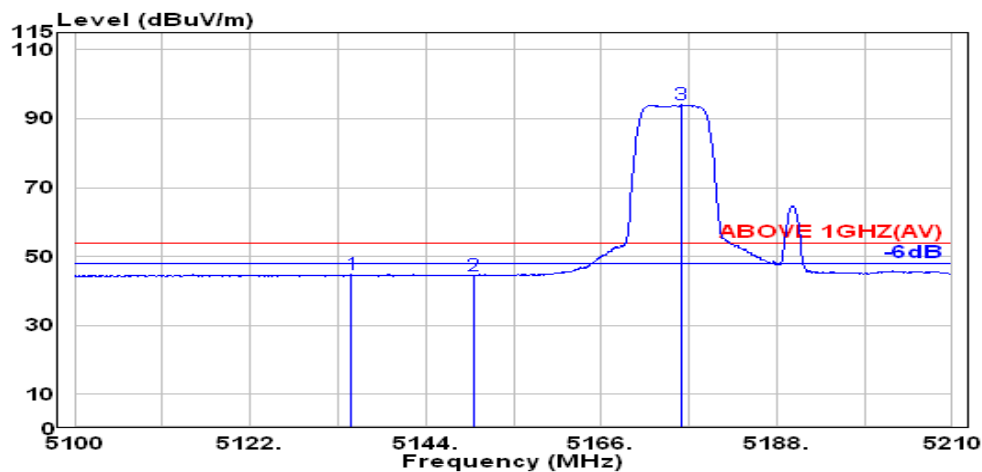

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.700	33.57	8.31	39.09	42.15	44.94	54.00	9.06	Average
5150.000	33.60	8.33	39.09	41.75	44.58	54.00	9.42	Average
@ 5176.000	33.60	8.36	39.09	91.14	94.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

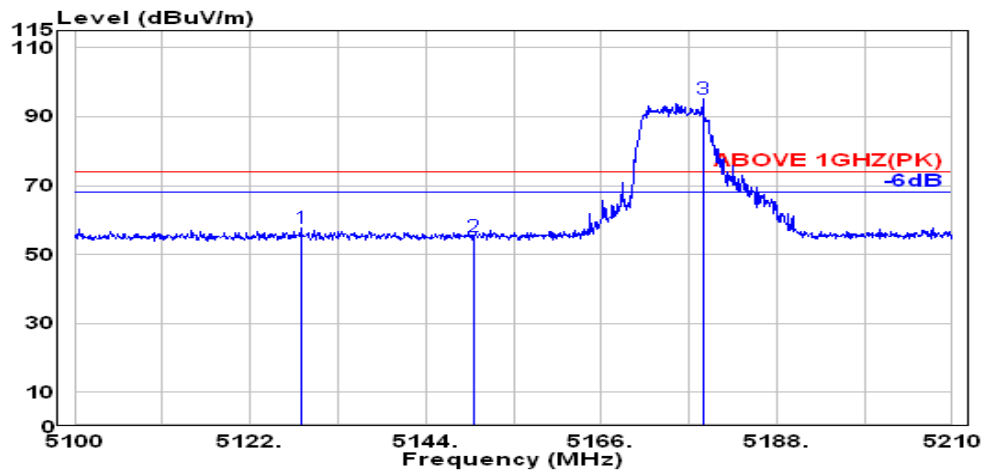

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.300	33.56	8.30	39.09	55.02	57.79	74.00	16.21	Peak
5150.000	33.60	8.33	39.09	52.36	55.19	74.00	18.81	Peak
@ 5178.700	33.60	8.36	39.09	92.49	95.36	---	---	Peak

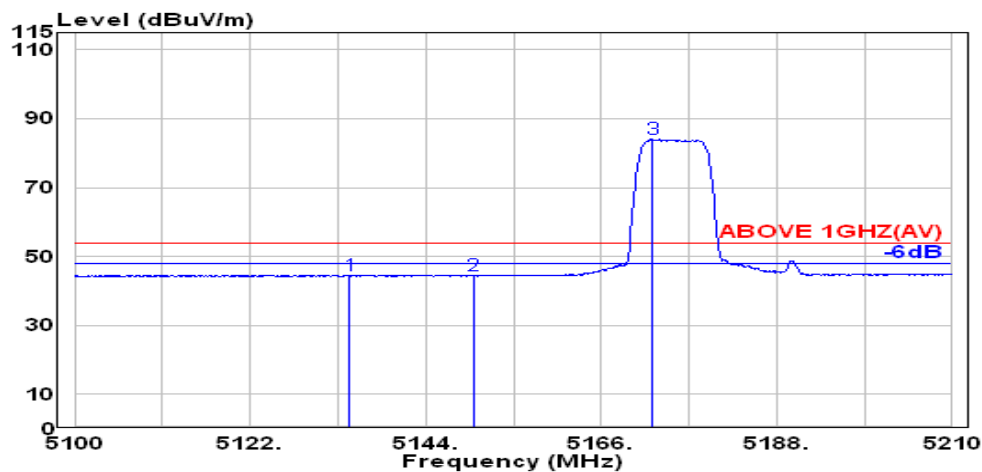

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.400	33.57	8.31	39.09	41.87	44.65	54.00	9.35	Average
5150.000	33.60	8.33	39.09	41.64	44.48	54.00	9.52	Average
@ 5172.400	33.60	8.35	39.09	81.17	84.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

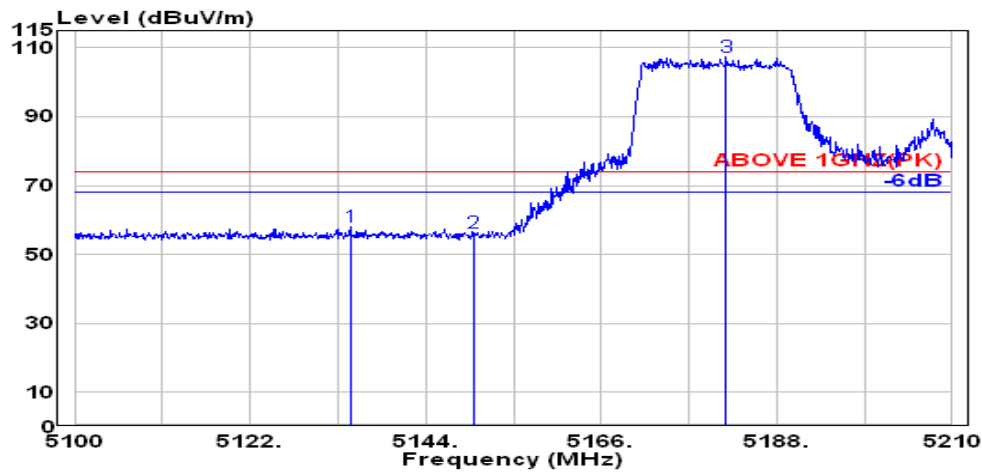

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.600	33.57	8.31	39.09	55.29	58.07	74.00	15.93	Peak
5150.000	33.60	8.33	39.09	53.39	56.23	74.00	17.77	Peak
@ 5181.600	33.60	8.36	39.09	104.34	107.21	---	---	Peak

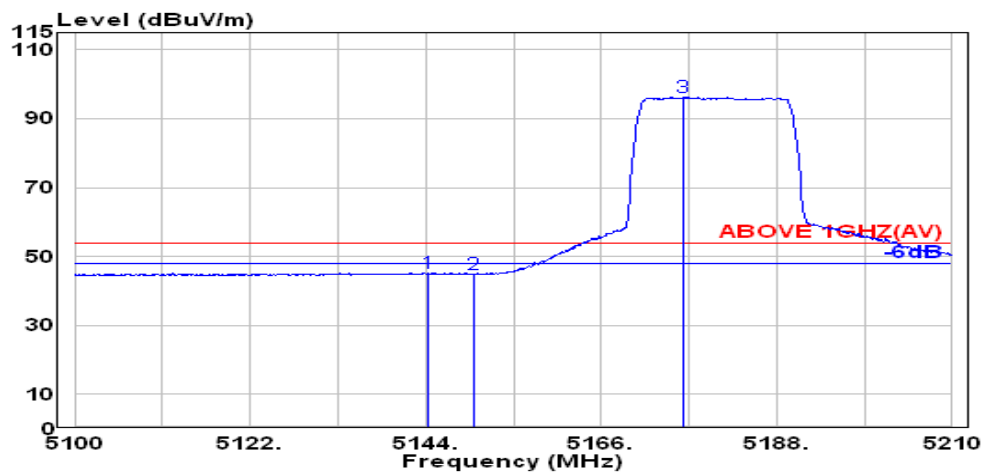


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	33.59	8.32	39.09	42.34	45.16	54.00	8.84	Average
5150.000	33.60	8.33	39.09	41.94	44.77	54.00	9.23	Average
@ 5176.200	33.60	8.36	39.09	93.38	96.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

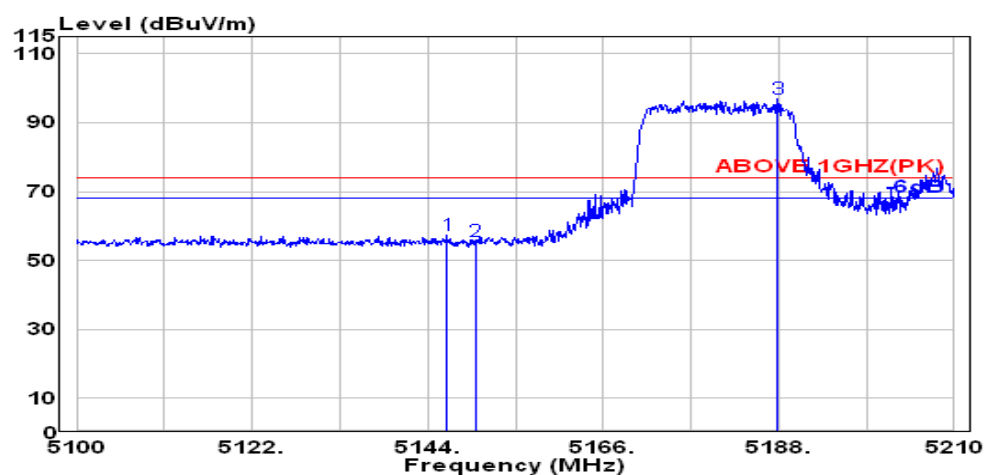

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.400	33.59	8.32	39.09	54.68	57.50	74.00	16.50	Peak
5150.000	33.60	8.33	39.09	52.68	55.52	74.00	18.48	Peak
@ 5187.900	33.60	8.37	39.09	94.09	96.97	---	---	Peak

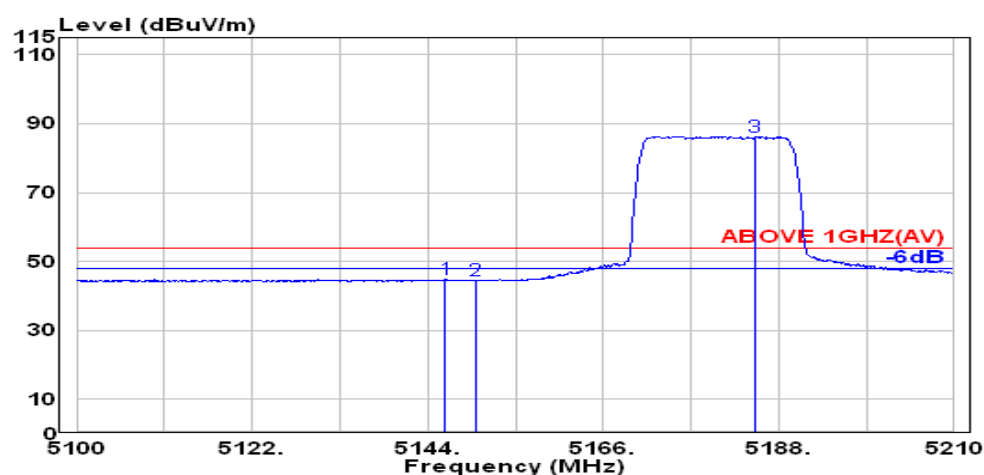

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.59	8.32	39.09	41.88	44.71	54.00	9.29	Average
5150.000	33.60	8.33	39.09	41.61	44.44	54.00	9.56	Average
@ 5185.000	33.60	8.37	39.09	83.45	86.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

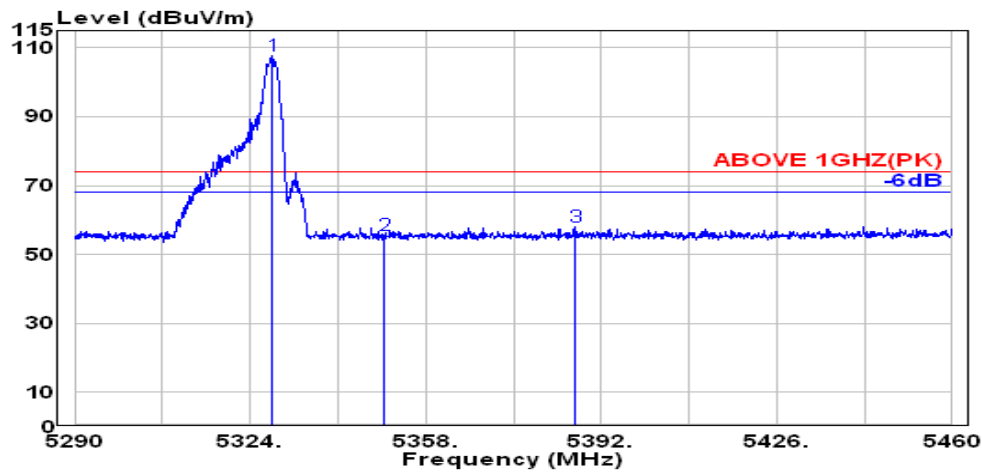

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.66	8.52	39.08	104.47	107.56	---	---	Peak
5350.000	33.70	8.54	39.08	52.59	55.75	74.00	18.25	Peak
5387.000	33.92	8.58	39.08	54.55	57.97	74.00	16.03	Peak

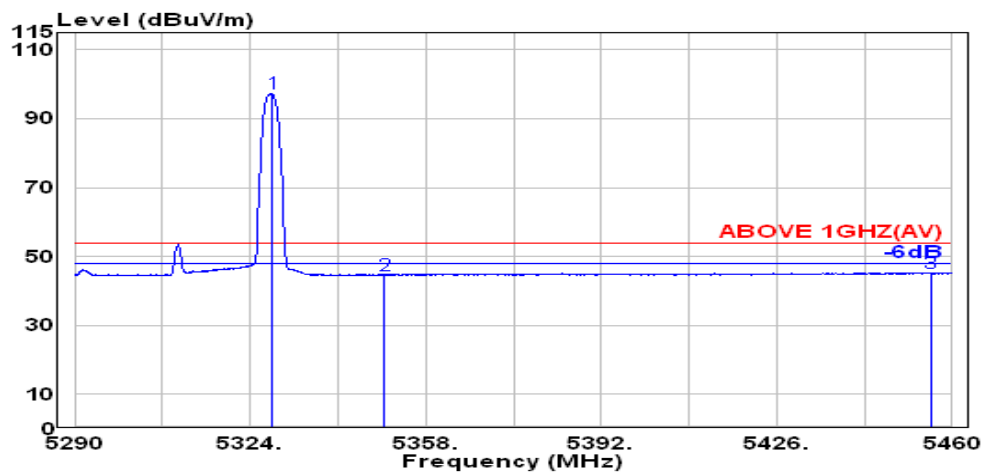

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.66	8.52	39.08	94.32	97.42	---	---	Average
5350.000	33.70	8.54	39.08	41.46	44.62	54.00	9.38	Average
5455.900	34.10	8.65	39.07	41.62	45.30	54.00	8.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

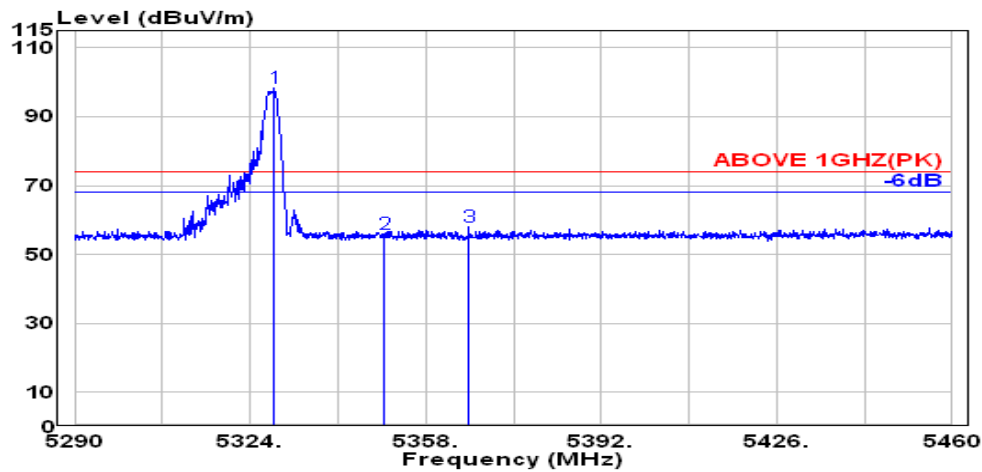

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.700	33.66	8.52	39.08	95.23	98.33	---	---	Peak
5350.000	33.70	8.54	39.08	52.84	56.00	74.00	18.00	Peak
5366.300	33.80	8.56	39.08	54.89	58.17	74.00	15.83	Peak

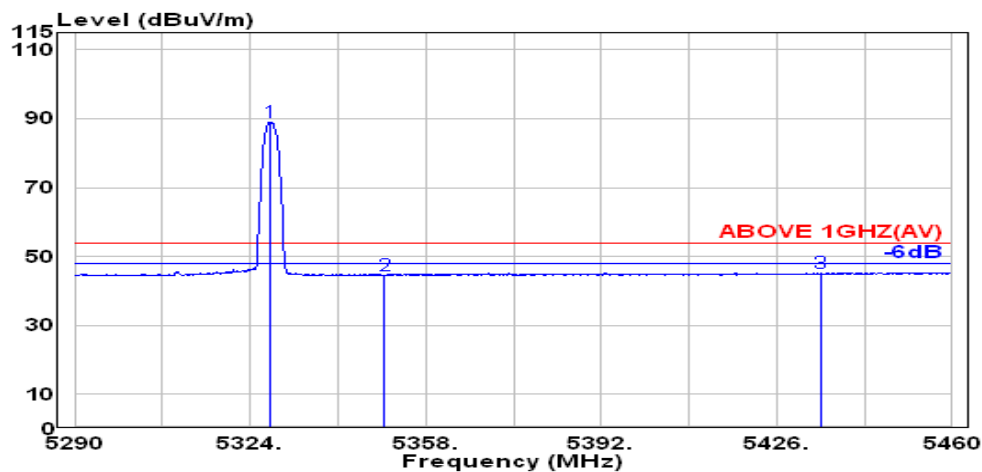

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.700	33.66	8.52	39.08	85.98	89.07	---	---	Average
5350.000	33.70	8.54	39.08	41.43	44.60	54.00	9.40	Average
5434.400	34.07	8.63	39.07	41.71	45.34	54.00	8.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

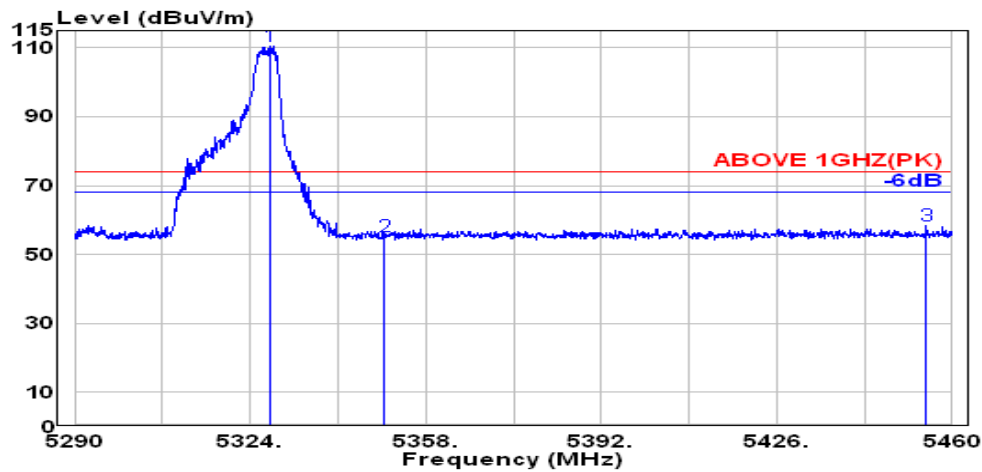

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.66	8.52	39.08	107.53	110.63	---	---	Peak
5350.000	33.70	8.54	39.08	52.06	55.23	74.00	18.77	Peak
5454.900	34.10	8.65	39.07	54.62	58.30	74.00	15.70	Peak

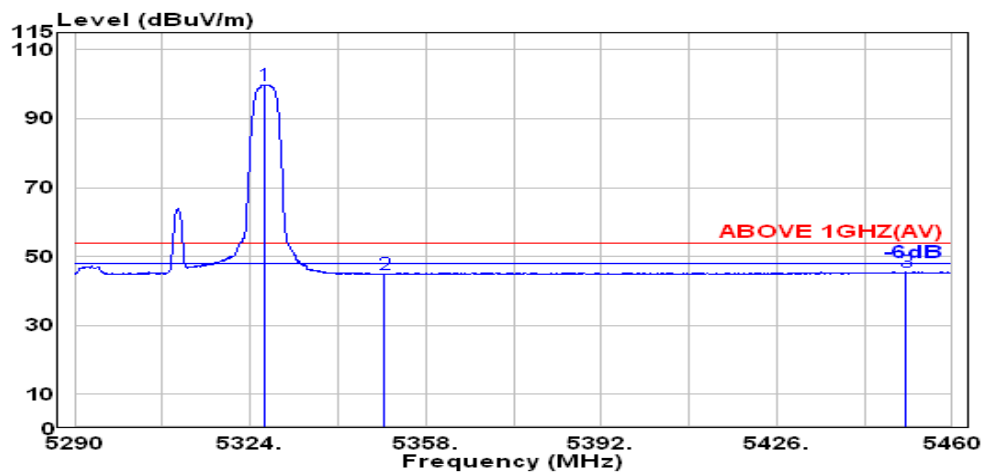

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.700	33.65	8.52	39.08	96.74	99.83	---	---	Average
5350.000	33.70	8.54	39.08	41.63	44.80	54.00	9.20	Average
5451.000	34.10	8.65	39.07	41.83	45.50	54.00	8.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

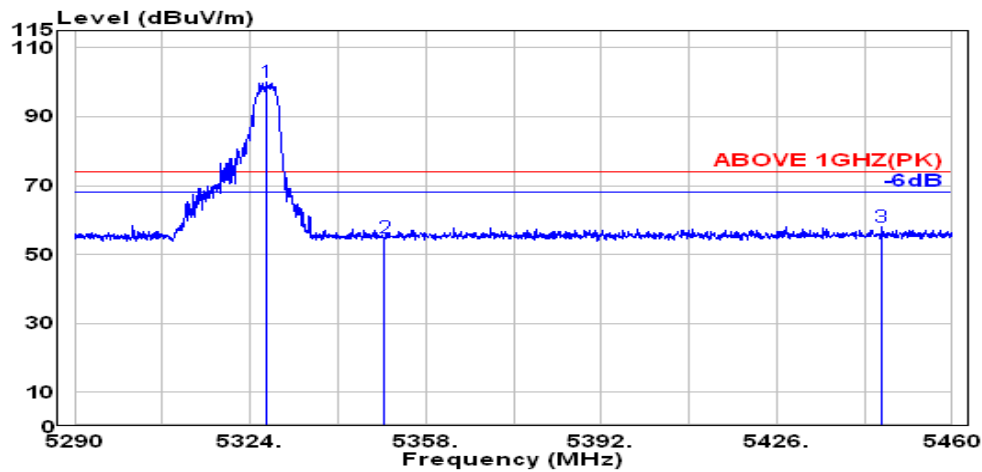

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.65	8.52	39.08	97.11	100.21	---	---	Peak
5350.000	33.70	8.54	39.08	51.65	54.82	74.00	19.18	Peak
5446.300	34.09	8.64	39.07	54.49	58.15	74.00	15.85	Peak

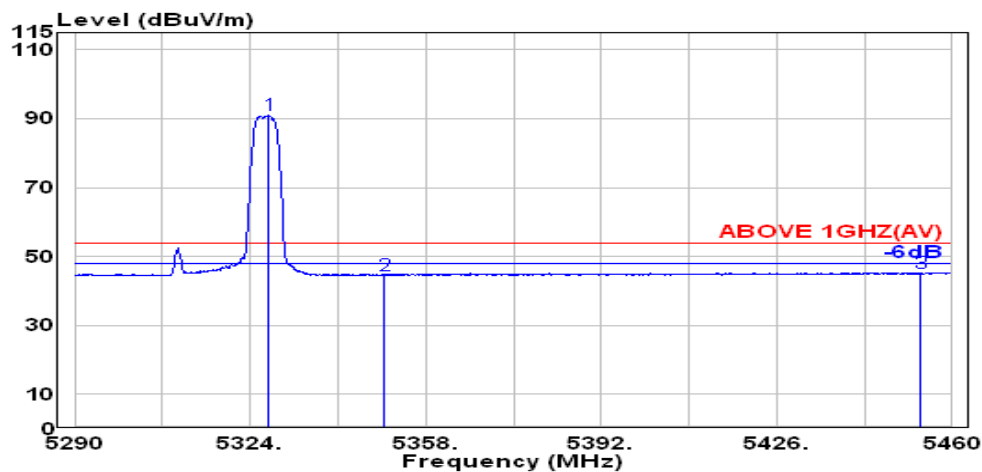

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.66	8.52	39.08	87.93	91.02	---	---	Average
5350.000	33.70	8.54	39.08	41.48	44.64	54.00	9.36	Average
5453.800	34.10	8.65	39.07	41.67	45.34	54.00	8.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

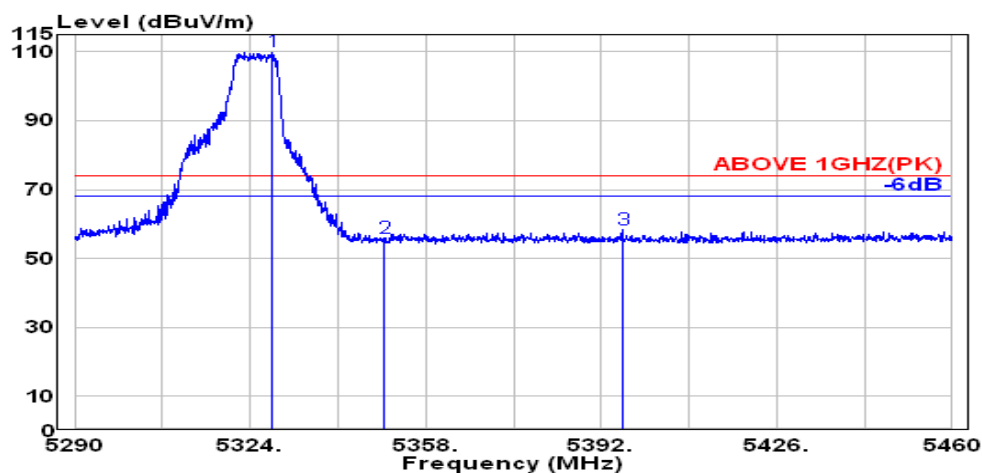

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.66	8.52	39.08	106.87	109.96	---	---	Peak
5350.000	33.70	8.54	39.08	52.90	56.07	74.00	17.93	Peak
5396.200	33.98	8.59	39.08	54.77	58.26	74.00	15.74	Peak

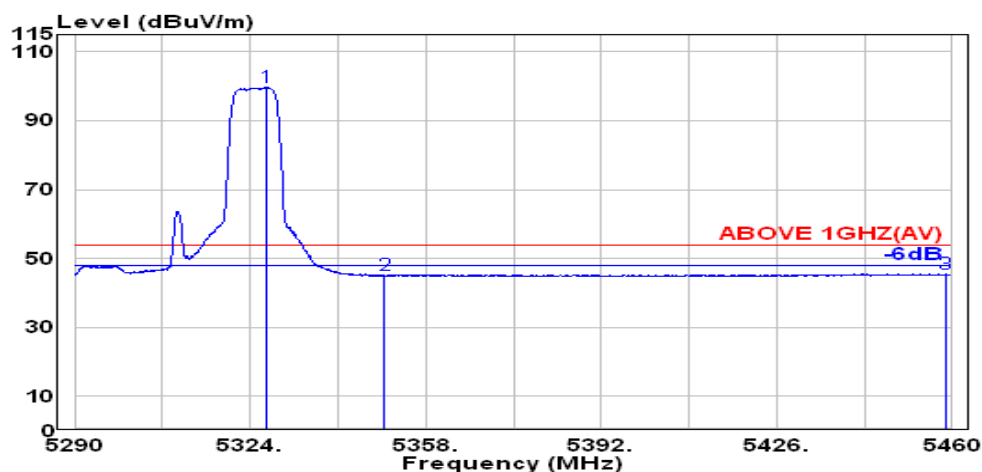

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.000	33.65	8.52	39.08	96.55	99.64	---	---	Average
5350.000	33.70	8.54	39.08	41.92	45.08	54.00	8.92	Average
5458.700	34.10	8.66	39.07	41.92	45.60	54.00	8.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

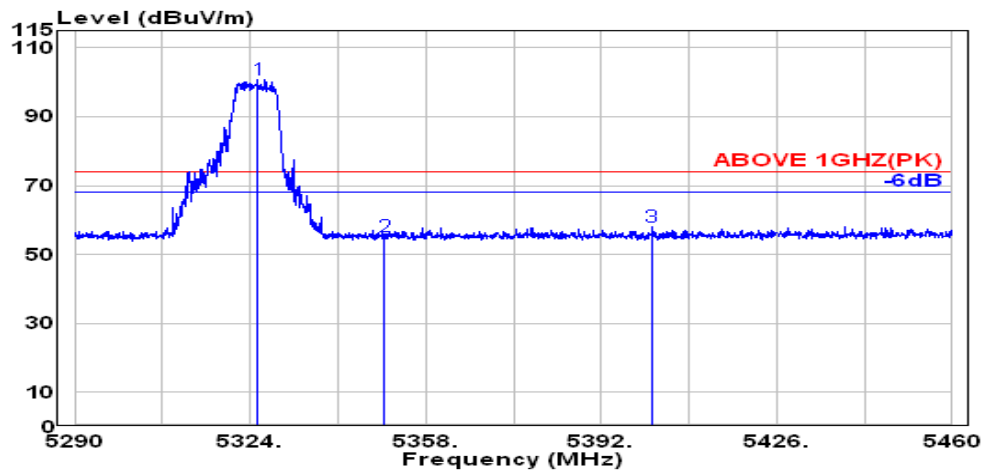

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.500	33.65	8.52	39.08	97.83	100.92	---	---	Peak
5350.000	33.70	8.54	39.08	52.08	55.24	74.00	18.76	Peak
5401.800	34.00	8.60	39.08	54.48	58.01	74.00	15.99	Peak

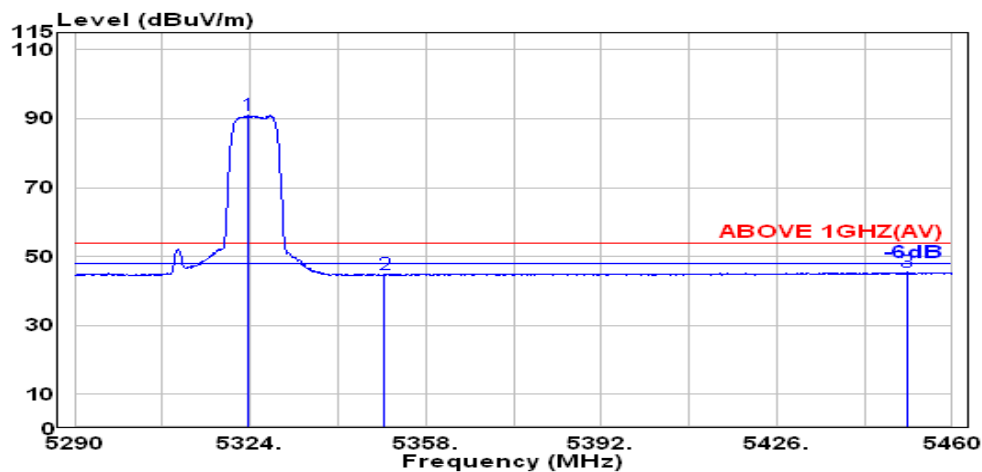

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.65	8.51	39.08	87.88	90.96	---	---	Average
5350.000	33.70	8.54	39.08	41.51	44.68	54.00	9.32	Average
5451.200	34.10	8.65	39.07	41.72	45.39	54.00	8.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

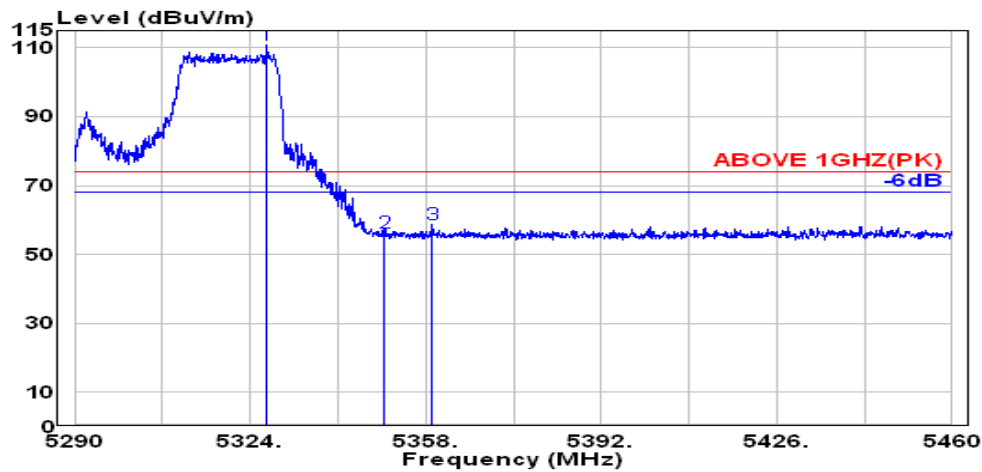

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.65	8.52	39.08	107.79	110.89	---	---	Peak
5350.000	33.70	8.54	39.08	53.13	56.29	74.00	17.71	Peak
5359.300	33.76	8.55	39.08	55.49	58.72	74.00	15.28	Peak

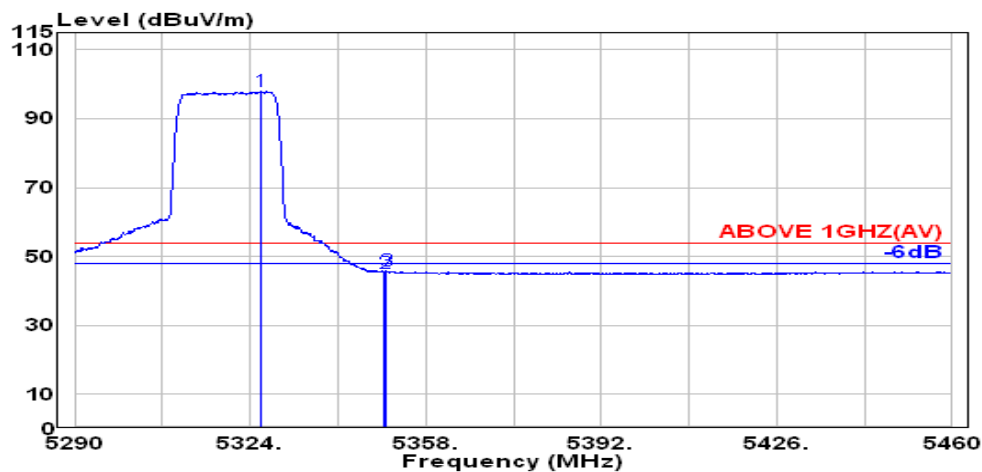

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	33.65	8.52	39.08	94.88	97.97	---	---	Average
5350.000	33.70	8.54	39.08	42.15	45.32	54.00	8.68	Average
5350.300	33.70	8.54	39.08	42.56	45.73	54.00	8.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

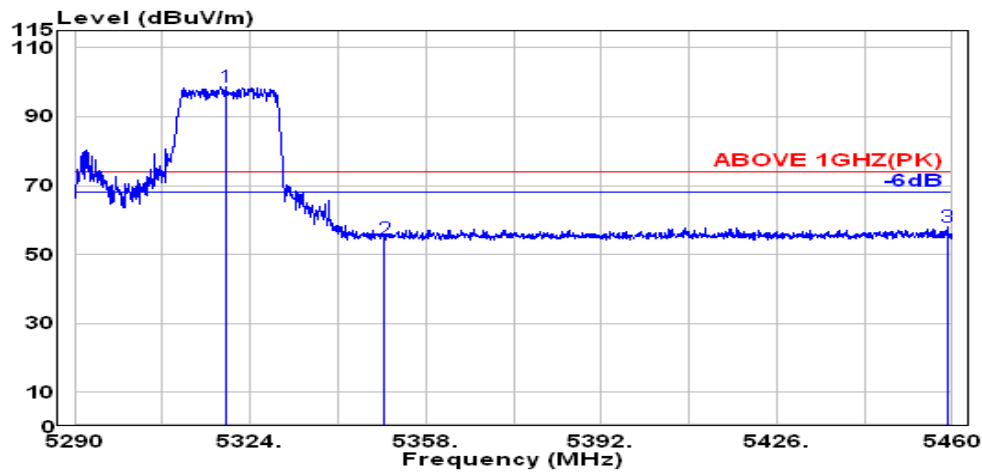

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.300	33.64	8.51	39.08	95.66	98.73	---	---	Peak
5350.000	33.70	8.54	39.08	51.50	54.67	74.00	19.33	Peak
5459.100	34.10	8.66	39.07	54.33	58.01	74.00	15.99	Peak

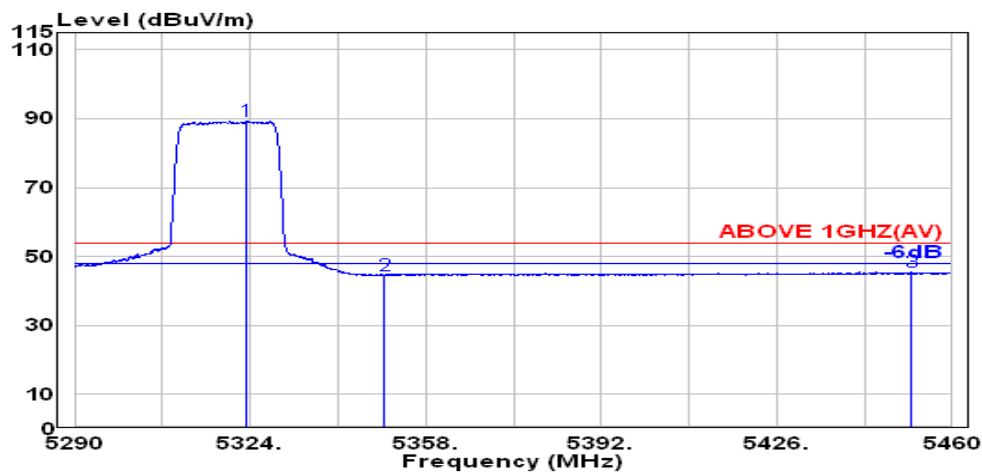

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.65	8.51	39.08	86.26	89.34	---	---	Average
5350.000	33.70	8.54	39.08	41.44	44.60	54.00	9.40	Average
5452.100	34.10	8.65	39.07	41.76	45.43	54.00	8.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

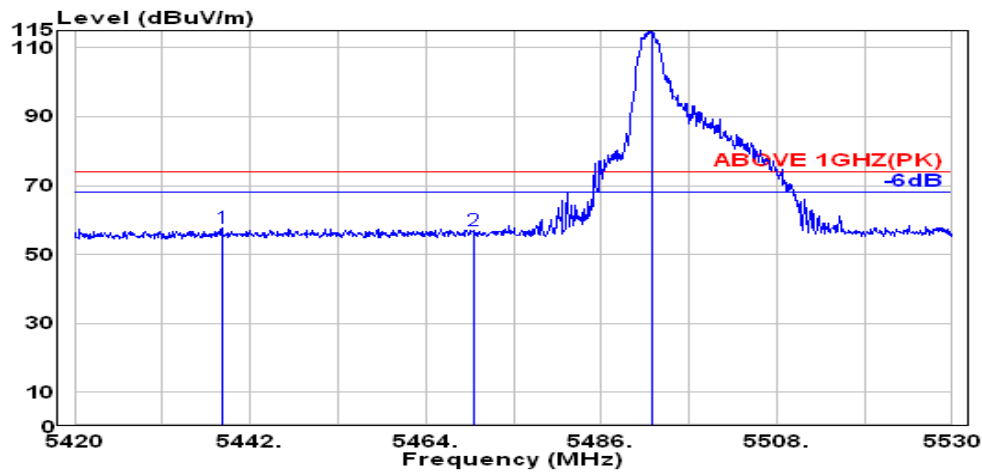

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.400	34.08	8.63	39.07	54.00	57.63	74.00	16.37	Peak
5470.000	34.10	8.67	39.07	53.37	57.06	74.00	16.94	Peak
@ 5492.300	34.10	8.69	39.07	112.67	116.39	---	---	Peak

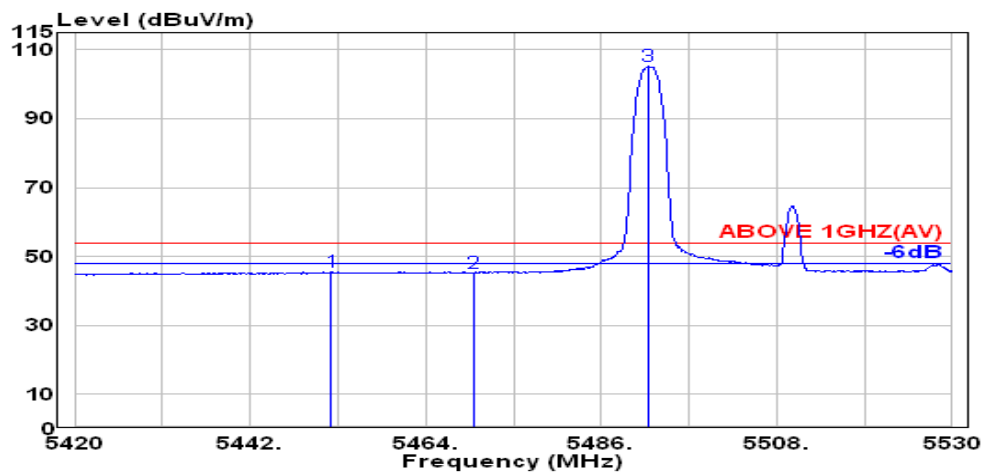

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.100	34.10	8.65	39.07	41.90	45.57	54.00	8.43	Average
5470.000	34.10	8.67	39.07	41.63	45.33	54.00	8.67	Average
@ 5491.900	34.10	8.69	39.07	101.63	105.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

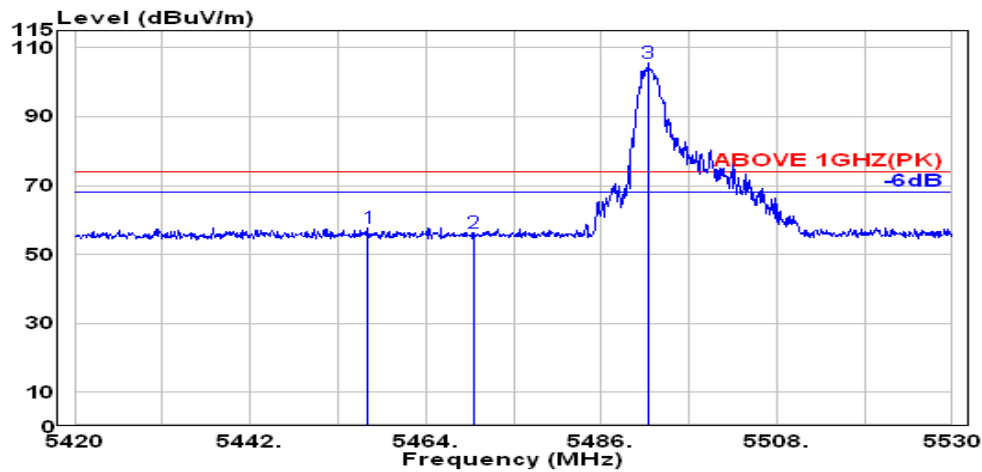

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.700	34.10	8.65	39.07	54.02	57.71	74.00	16.29	Peak
5470.000	34.10	8.67	39.07	52.78	56.47	74.00	17.53	Peak
@ 5491.800	34.10	8.69	39.07	102.01	105.73	---	---	Peak

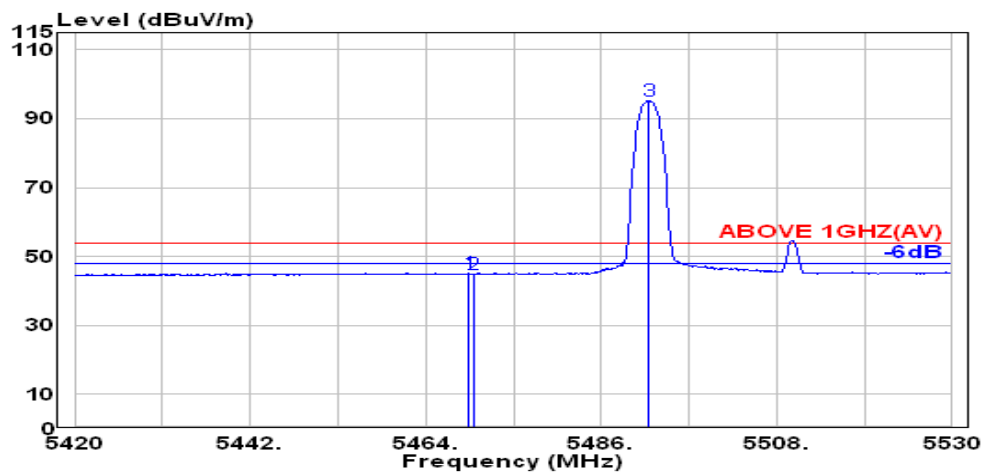

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.10	8.67	39.07	41.43	45.13	54.00	8.87	Average
5470.000	34.10	8.67	39.07	41.20	44.90	54.00	9.10	Average
@ 5492.000	34.10	8.69	39.07	91.53	95.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

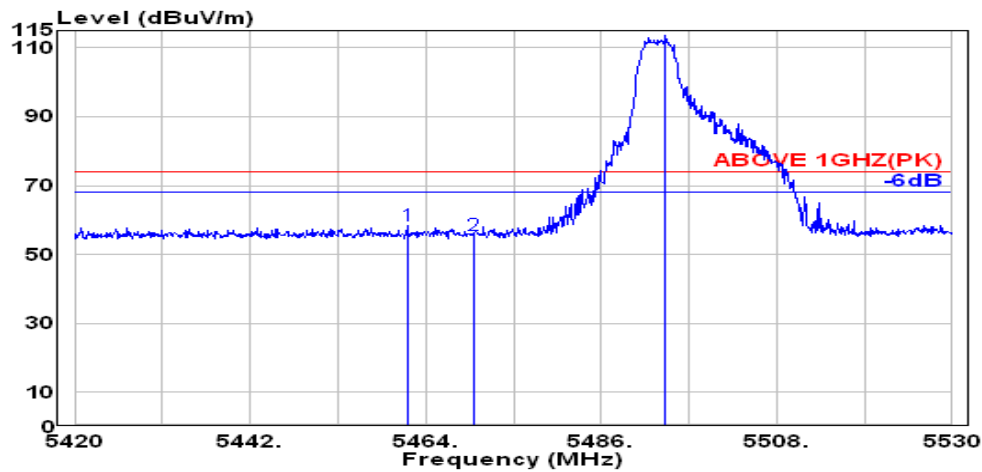

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.700	34.10	8.66	39.07	54.63	58.31	74.00	15.69	Peak
5470.000	34.10	8.67	39.07	51.86	55.56	74.00	18.44	Peak
@ 5494.000	34.10	8.69	39.07	109.76	113.48	---	---	Peak

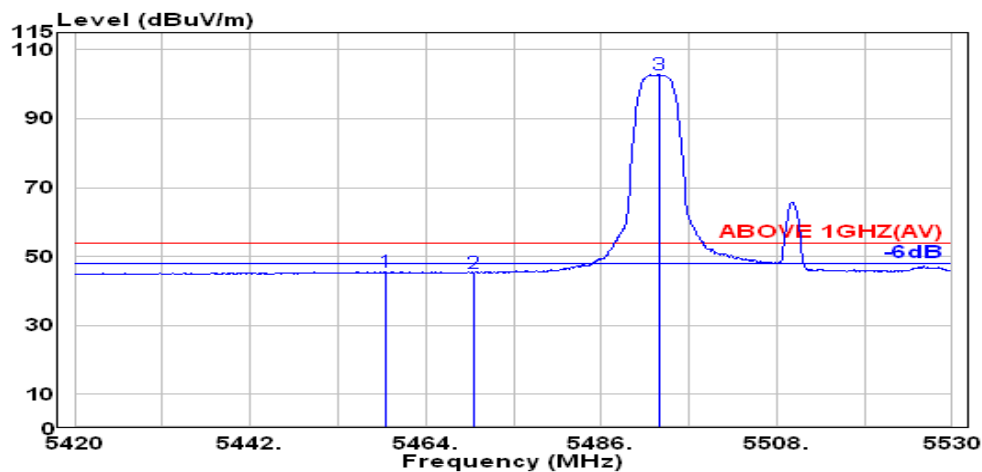

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.900	34.10	8.66	39.07	41.90	45.58	54.00	8.42	Average
5470.000	34.10	8.67	39.07	41.54	45.24	54.00	8.76	Average
@ 5493.200	34.10	8.69	39.07	99.16	102.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

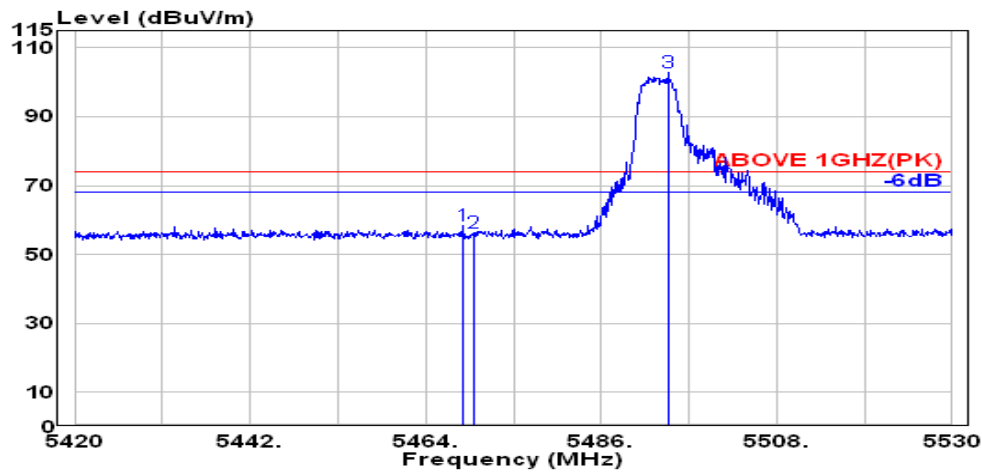

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.10	8.67	39.07	54.66	58.35	74.00	15.65	Peak
5470.000	34.10	8.67	39.07	52.43	56.13	74.00	17.87	Peak
@ 5494.400	34.10	8.69	39.07	99.25	102.97	---	---	Peak

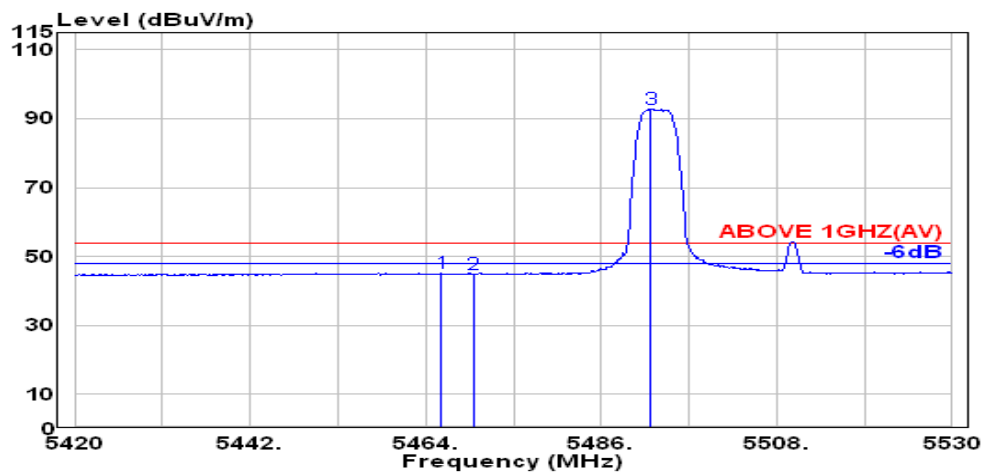

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.10	8.66	39.07	41.40	45.09	54.00	8.91	Average
5470.000	34.10	8.67	39.07	41.18	44.88	54.00	9.12	Average
@ 5492.200	34.10	8.69	39.07	89.17	92.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

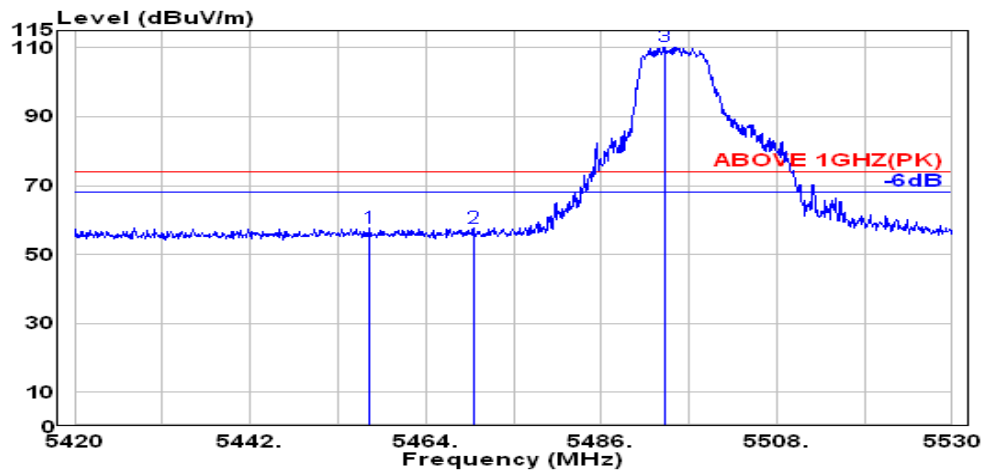

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.900	34.10	8.65	39.07	53.88	57.56	74.00	16.44	Peak
5470.000	34.10	8.67	39.07	54.06	57.75	74.00	16.25	Peak
@ 5493.900	34.10	8.69	39.07	106.58	110.30	---	---	Peak

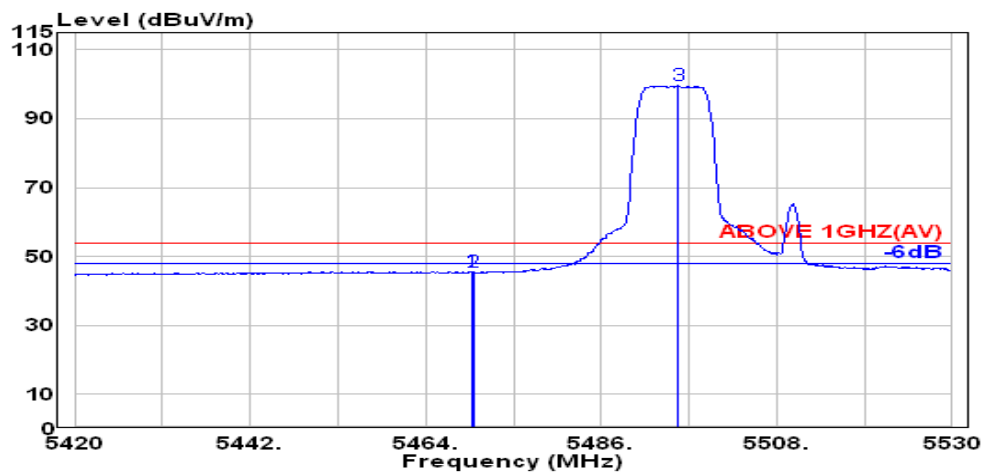

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.700	34.10	8.67	39.07	41.86	45.56	54.00	8.44	Average
5470.000	34.10	8.67	39.07	41.74	45.43	54.00	8.57	Average
@ 5495.600	34.10	8.69	39.07	95.85	99.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

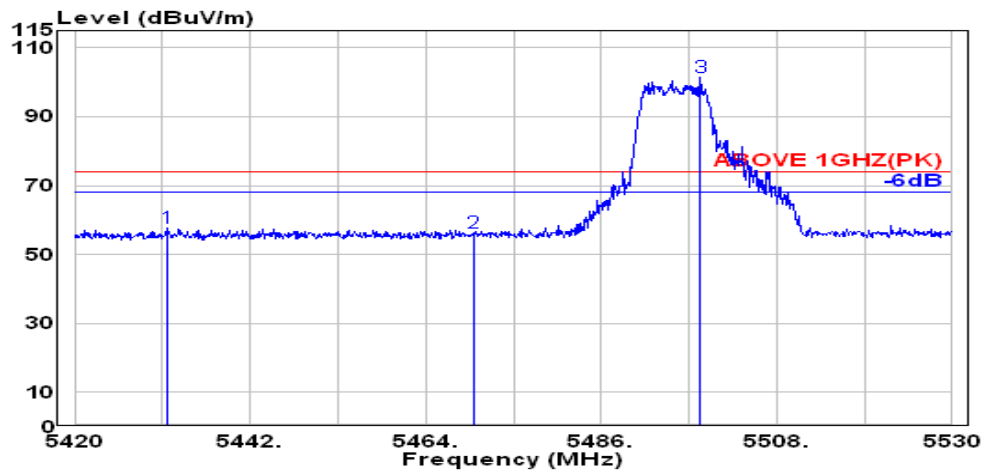

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.500	34.06	8.63	39.07	53.97	57.58	74.00	16.42	Peak
5470.000	34.10	8.67	39.07	52.49	56.19	74.00	17.81	Peak
@ 5498.400	34.10	8.70	39.07	97.76	101.49	---	---	Peak

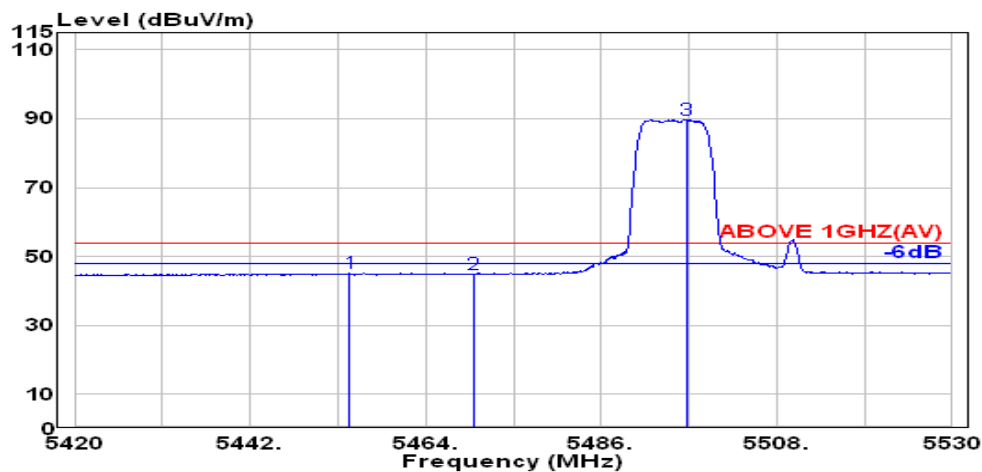


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.10	8.65	39.07	41.41	45.08	54.00	8.92	Average
5470.000	34.10	8.67	39.07	41.08	44.78	54.00	9.22	Average
@ 5496.700	34.10	8.70	39.07	86.02	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

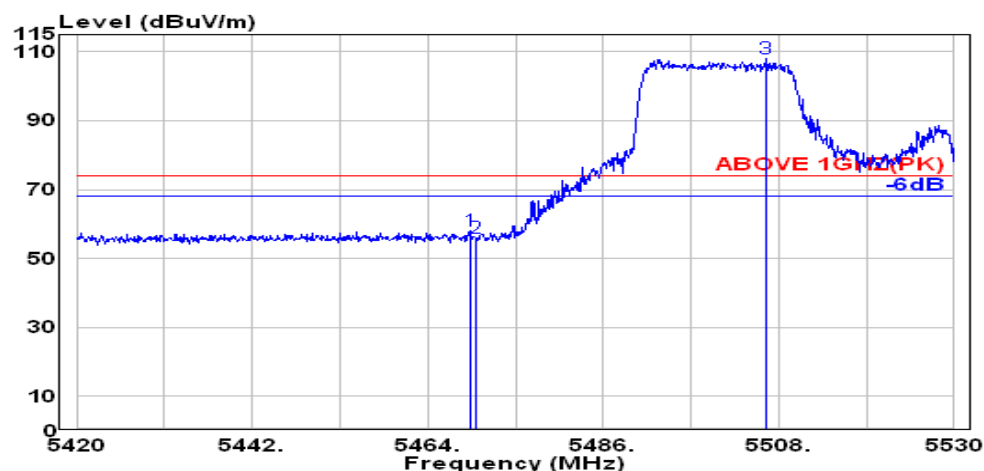

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.10	8.67	39.07	54.18	57.87	74.00	16.13	Peak
5470.000	34.10	8.67	39.07	52.34	56.03	74.00	17.97	Peak
@ 5506.400	34.09	8.71	39.07	104.45	108.17	---	---	Peak

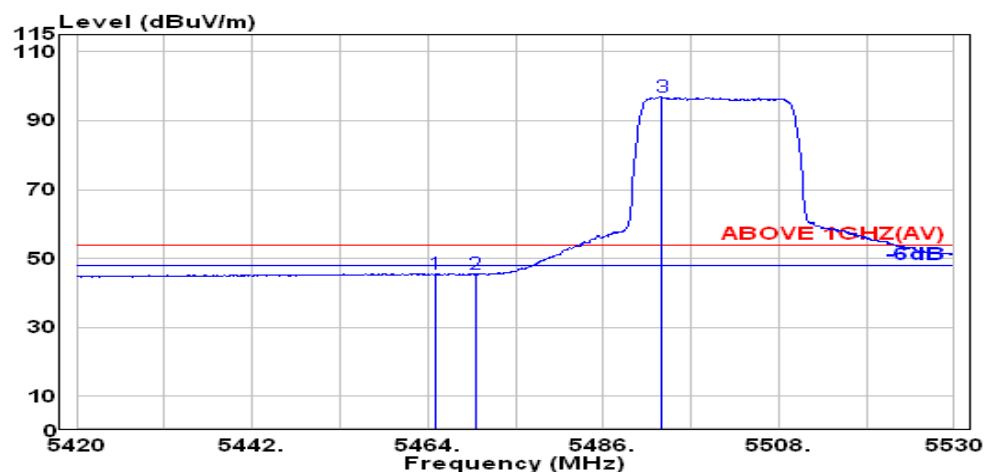

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
	5464.900	34.10	8.66	39.07	41.91	45.60	54.00	8.40	Average
	5470.000	34.10	8.67	39.07	41.99	45.68	54.00	8.32	Average
@	5493.300	34.10	8.69	39.07	93.16	96.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

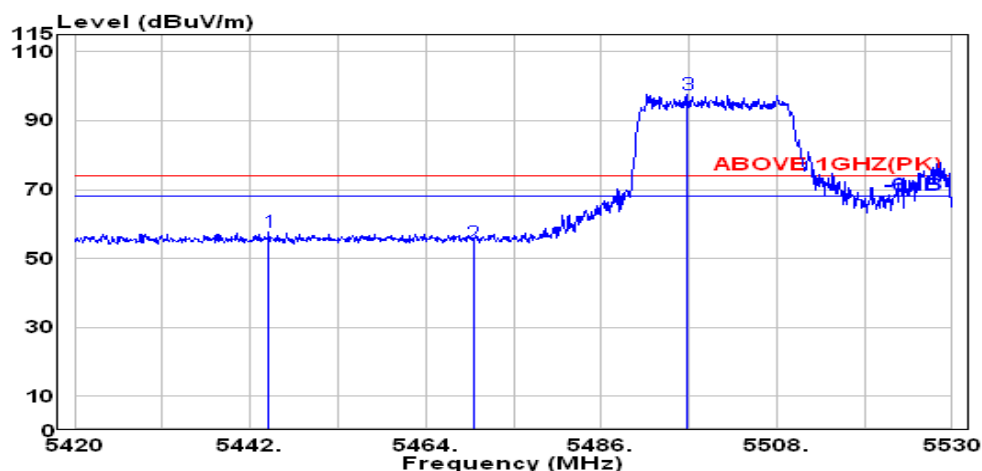

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.300	34.09	8.64	39.07	53.92	57.58	74.00	16.42	Peak
5470.000	34.10	8.67	39.07	50.94	54.64	74.00	19.36	Peak
@ 5496.800	34.10	8.70	39.07	93.92	97.65	---	---	Peak

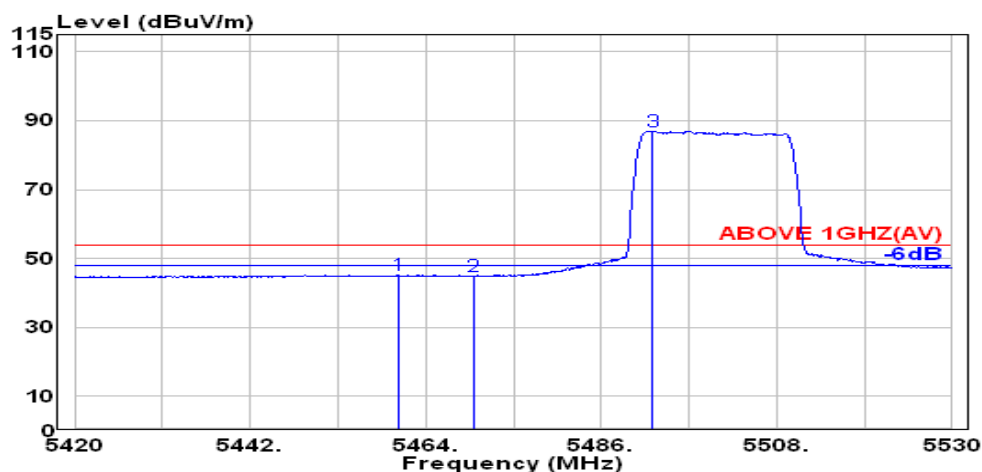

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.10	8.66	39.07	41.46	45.14	54.00	8.86	Average
5470.000	34.10	8.67	39.07	41.17	44.87	54.00	9.13	Average
@ 5492.400	34.10	8.69	39.07	83.31	87.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/17	Frequency	TX 5670MHz

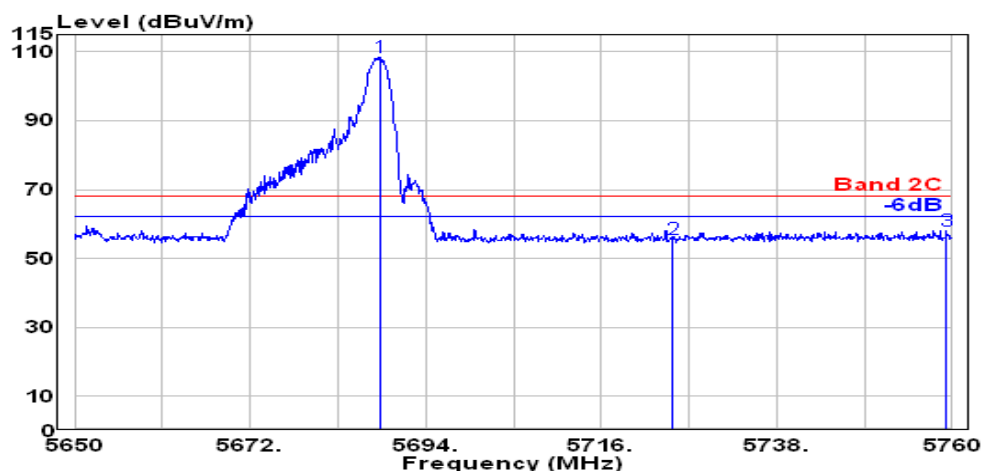

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.200	33.47	8.89	39.13	105.20	108.43	---	---	Peak
5725.000	33.60	8.92	39.14	52.31	55.69	68.20	12.51	Peak
5759.300	33.82	8.96	39.15	54.43	58.06	68.20	10.14	Peak

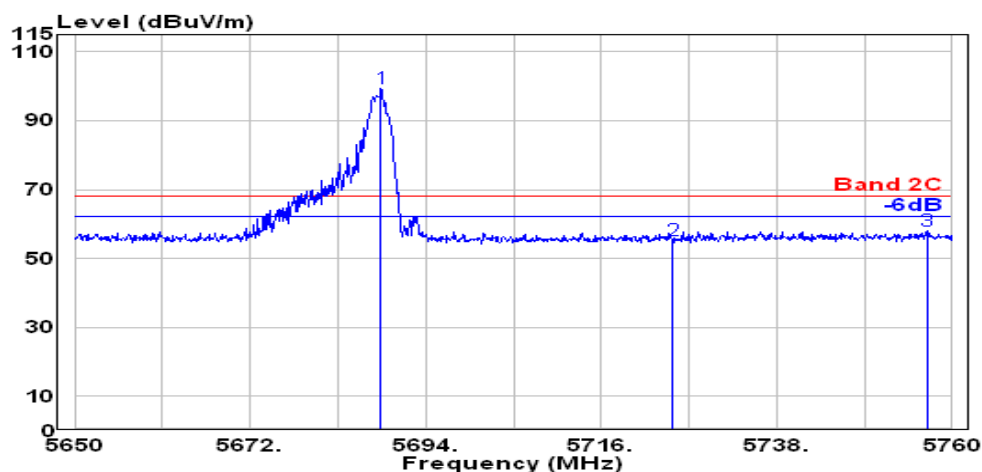

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.400	33.47	8.89	39.13	96.18	99.41	---	---	Peak
5725.000	33.60	8.92	39.14	51.76	55.15	68.20	13.05	Peak
5756.800	33.81	8.96	39.15	54.49	58.11	68.20	10.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/44	Frequency	TX 5670MHz

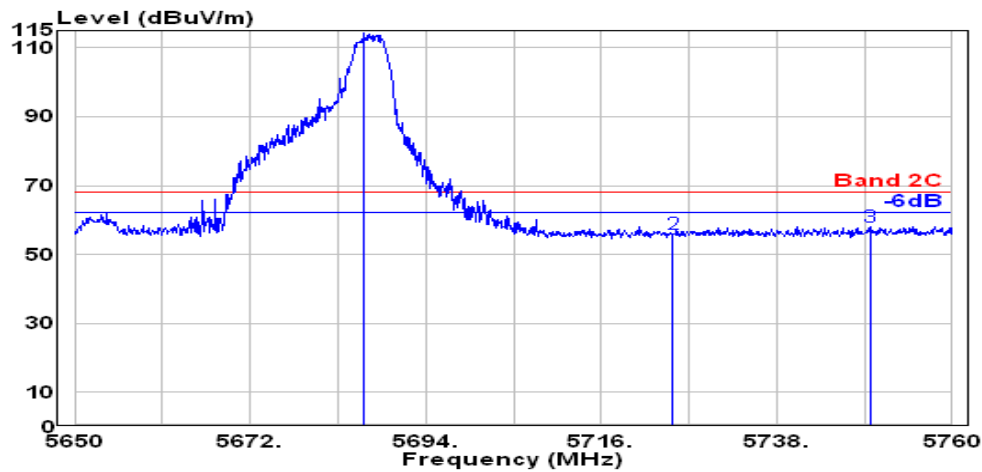

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5686.300	33.48	8.89	39.13	111.25	114.49	---	---	Peak
5725.000	33.60	8.92	39.14	52.51	55.90	68.20	12.30	Peak
5749.700	33.80	8.95	39.15	54.50	58.10	68.20	10.10	Peak

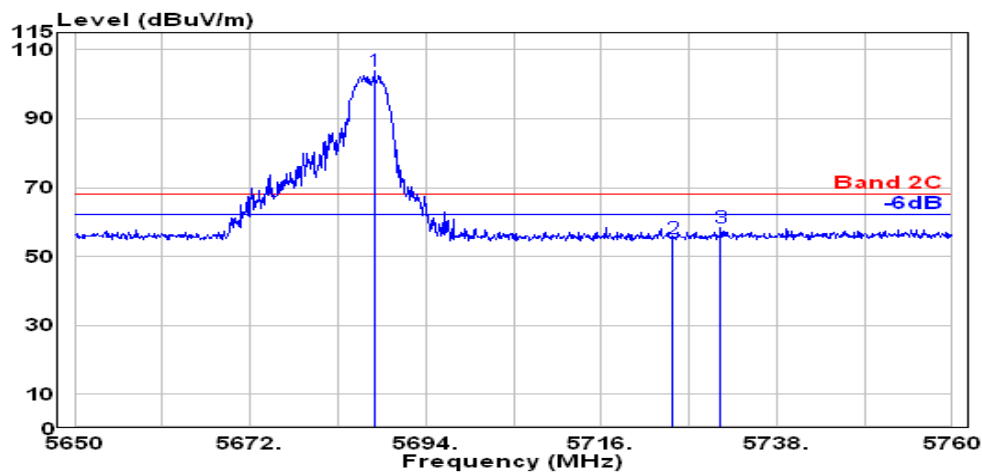

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.600	33.47	8.89	39.13	100.56	103.79	---	---	Peak
5725.000	33.60	8.92	39.14	51.90	55.29	68.20	12.91	Peak
5731.000	33.65	8.93	39.14	54.90	58.33	68.20	9.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/56	Frequency	TX 5670MHz

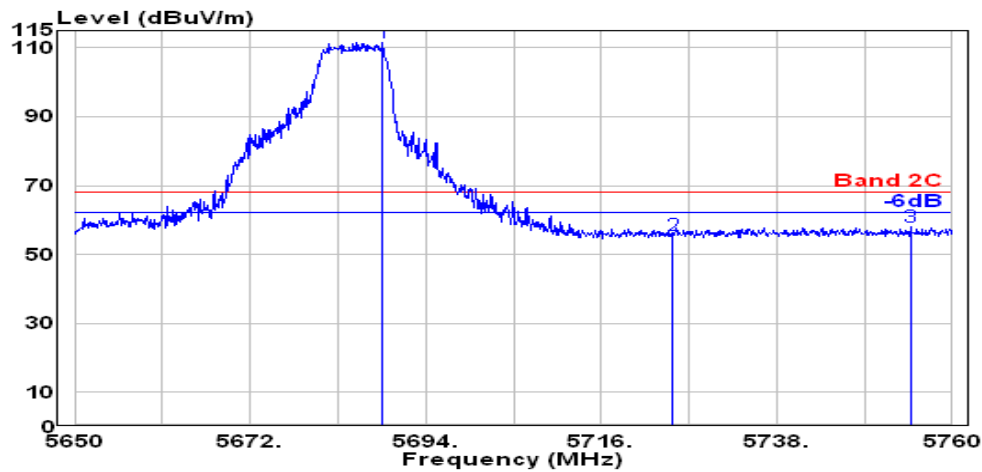

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.600	33.47	8.89	39.13	108.34	111.57	---	---	Peak
5725.000	33.60	8.92	39.14	52.28	55.67	68.20	12.53	Peak
5754.800	33.81	8.95	39.15	54.59	58.20	68.20	10.00	Peak

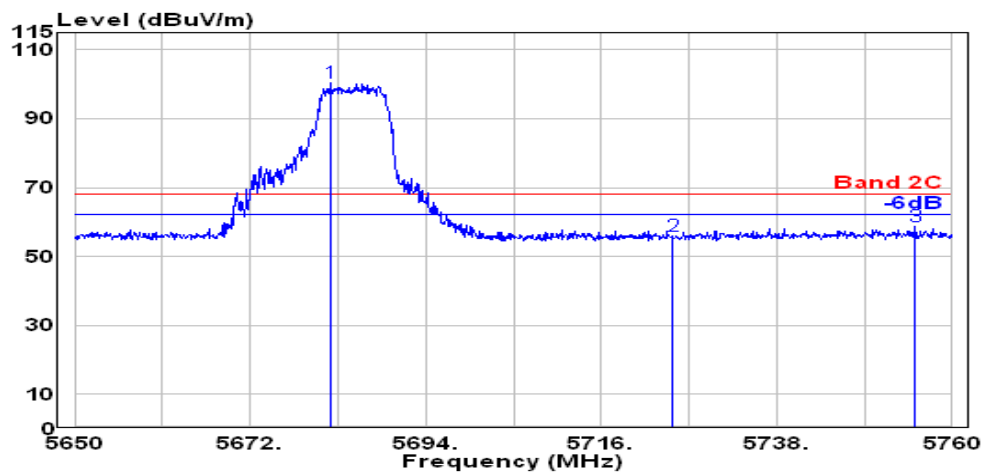

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.000	33.51	8.88	39.13	97.20	100.46	---	---	Peak
5725.000	33.60	8.92	39.14	52.73	56.12	68.20	12.08	Peak
5755.400	33.81	8.95	39.15	55.24	58.86	68.20	9.34	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

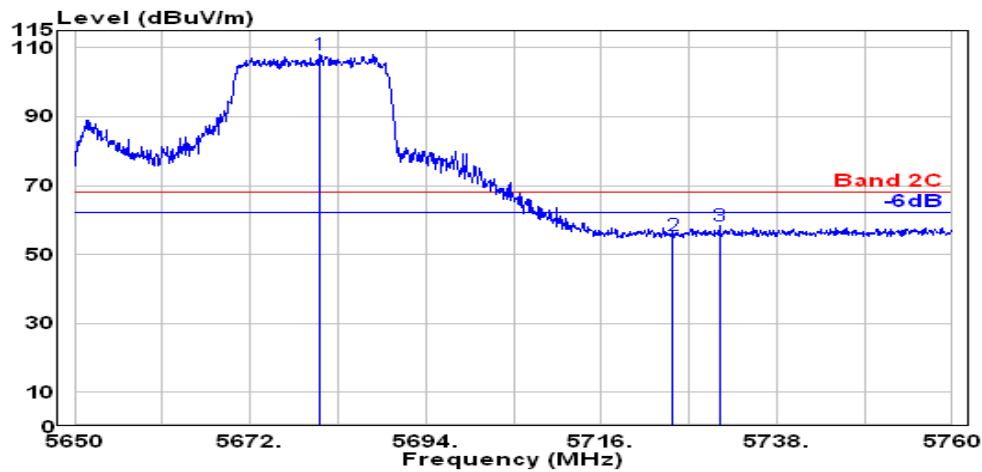

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.700	33.52	8.88	39.13	104.88	108.15	---	---	Peak
5725.000	33.60	8.92	39.14	52.09	55.48	68.20	12.72	Peak
5730.800	33.65	8.93	39.14	55.04	58.47	68.20	9.73	Peak

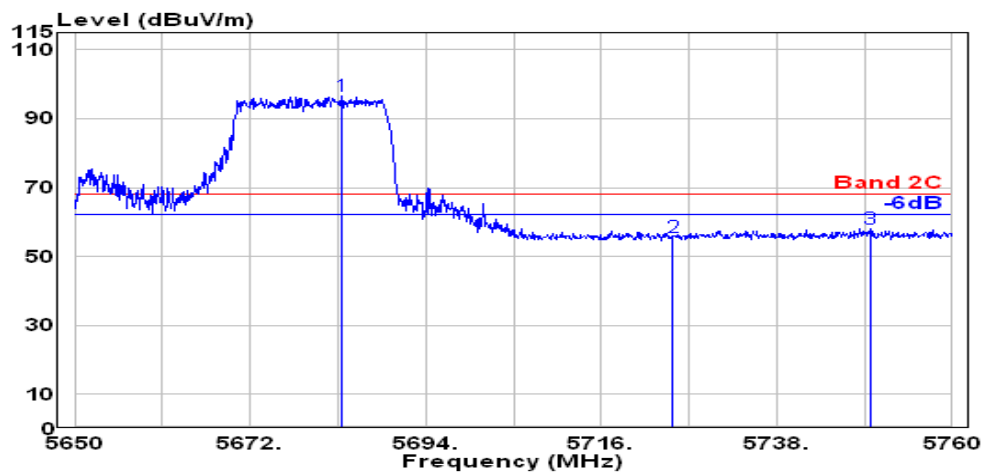

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.400	33.50	8.88	39.13	93.41	96.67	---	---	Peak
5725.000	33.60	8.92	39.14	52.32	55.71	68.20	12.49	Peak
5749.700	33.80	8.95	39.15	54.58	58.18	68.20	10.02	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	26/17	Frequency	TX 5875MHz

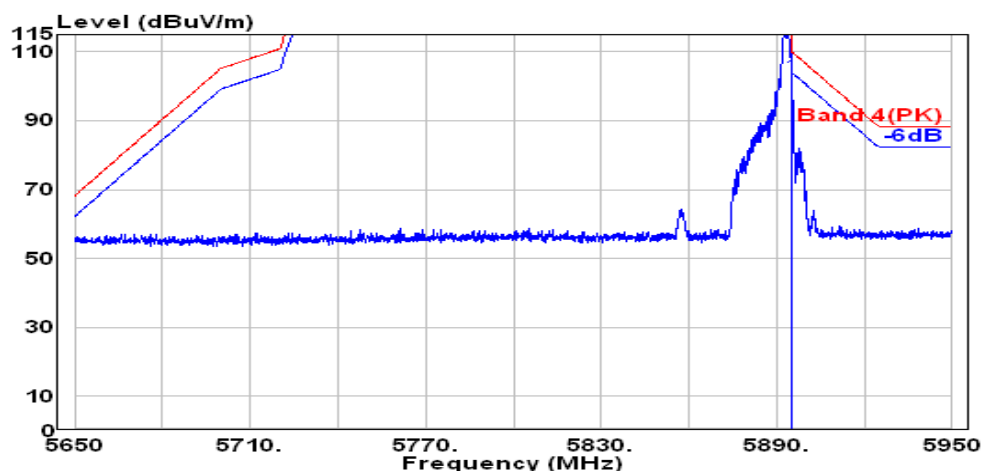

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	98.91	102.98	110.20	7.22	Peak

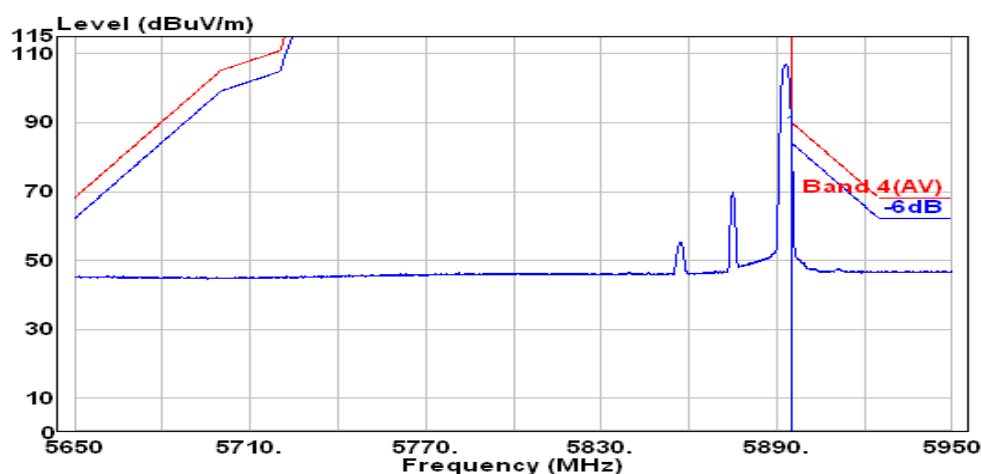

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	83.24	87.31	90.20	2.89	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	26/17	Frequency	TX 5875MHz

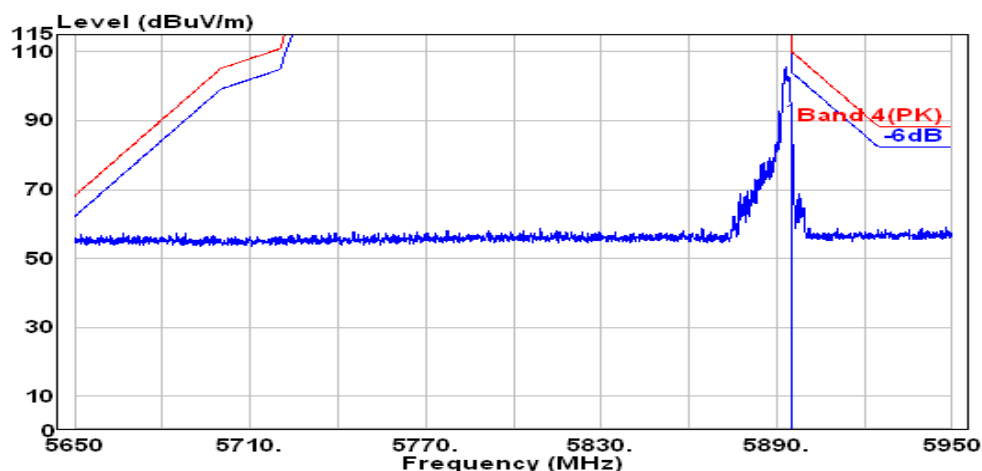

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	85.96	90.03	110.20	20.17	Peak

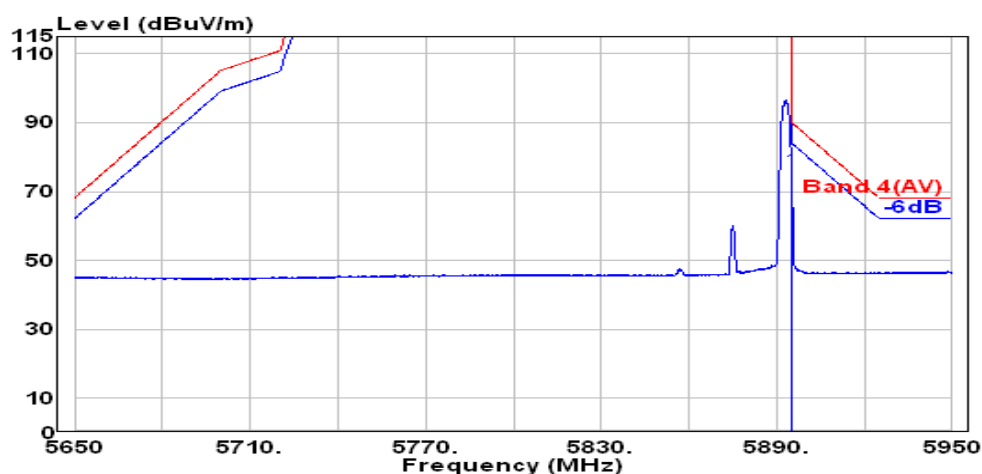


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	71.97	76.04	90.20	14.16	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	52/44	Frequency	TX 5875MHz

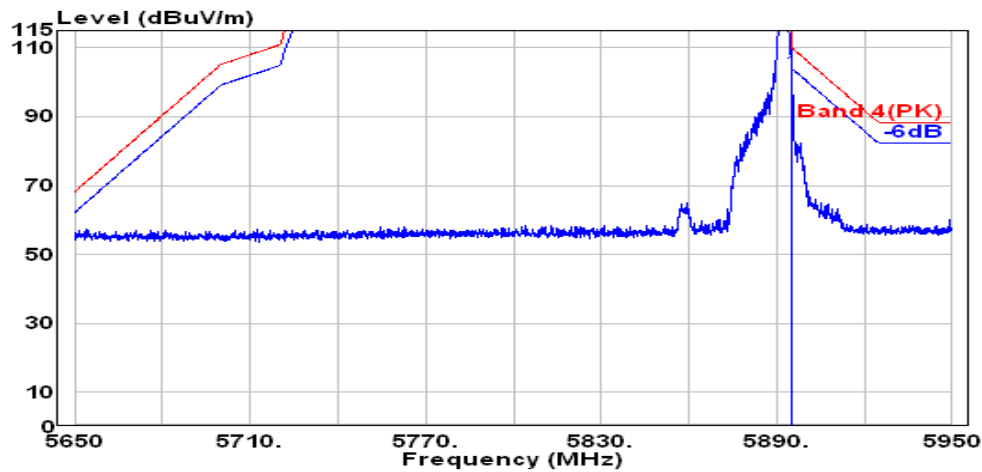

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.17	9.09	39.19	98.78	102.85	110.20	7.35	Peak

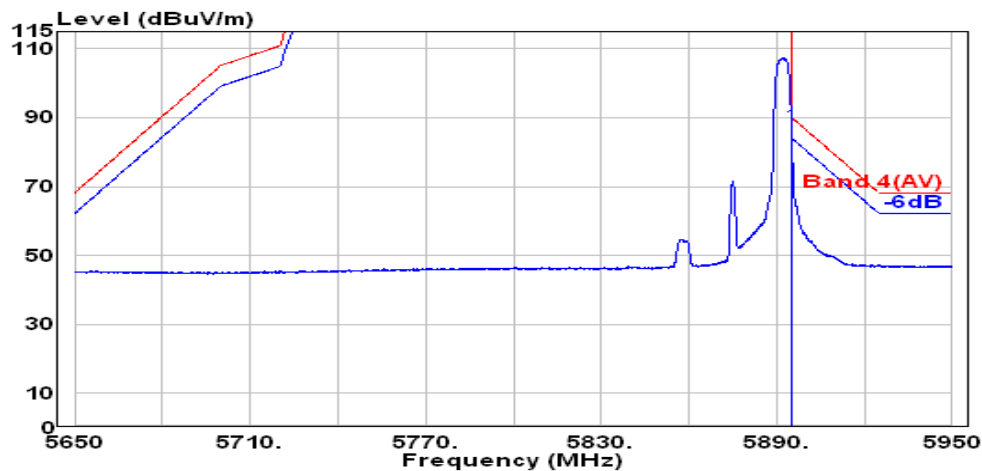

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.17	9.09	39.19	83.55	87.62	90.20	2.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	52/44	Frequency	TX 5875MHz

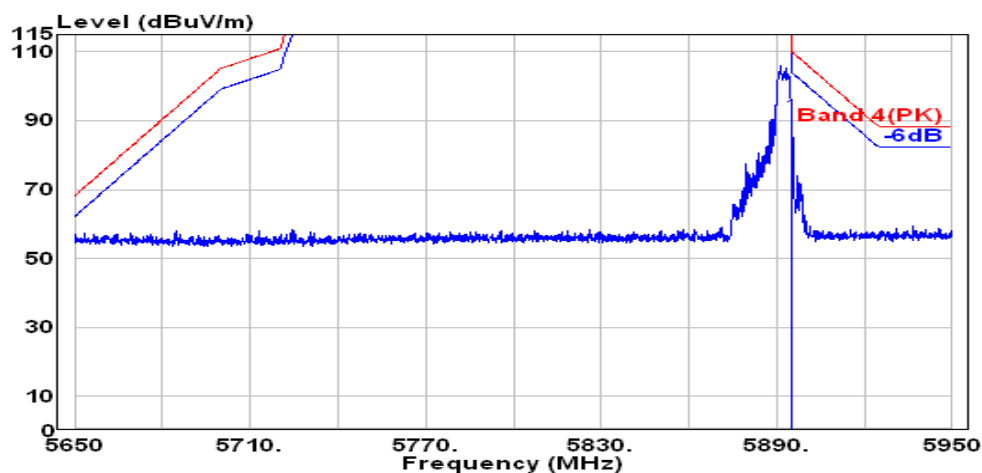

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	87.15	91.22	110.20	18.98	Peak

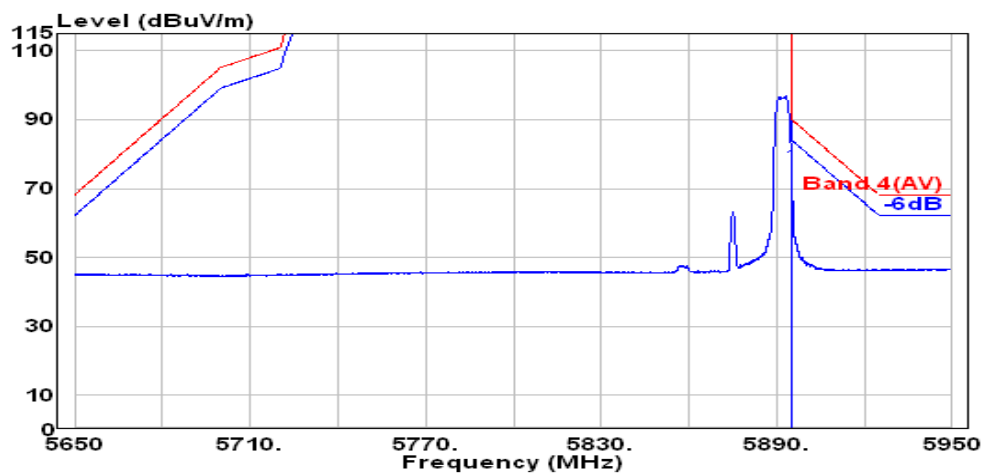

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	72.42	76.49	90.20	13.71	Average

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	106/56	Frequency	TX 5875MHz

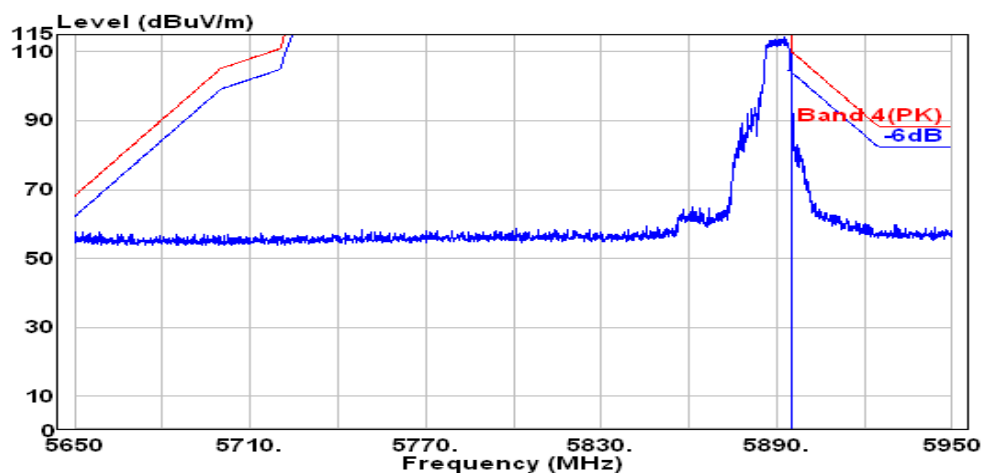

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	96.52	100.59	110.20	9.61	Peak

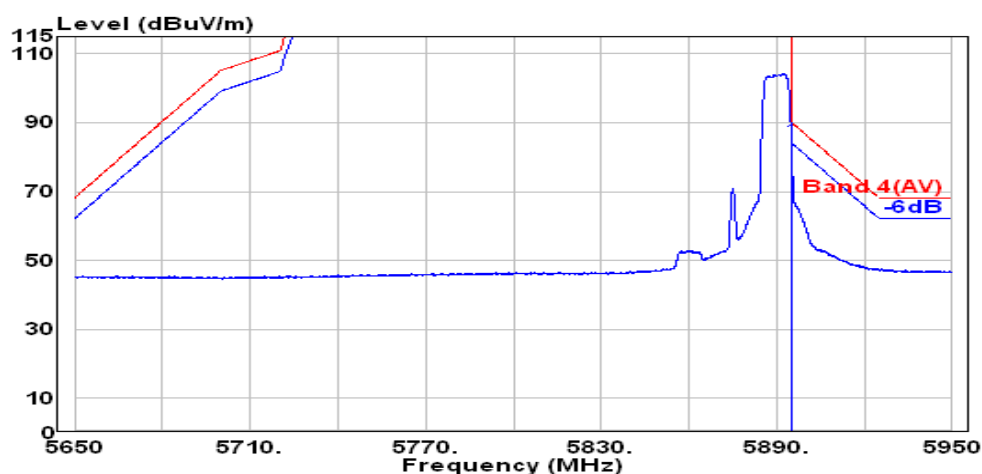

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	80.61	84.68	90.20	5.52	Average

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	106/56	Frequency	TX 5875MHz

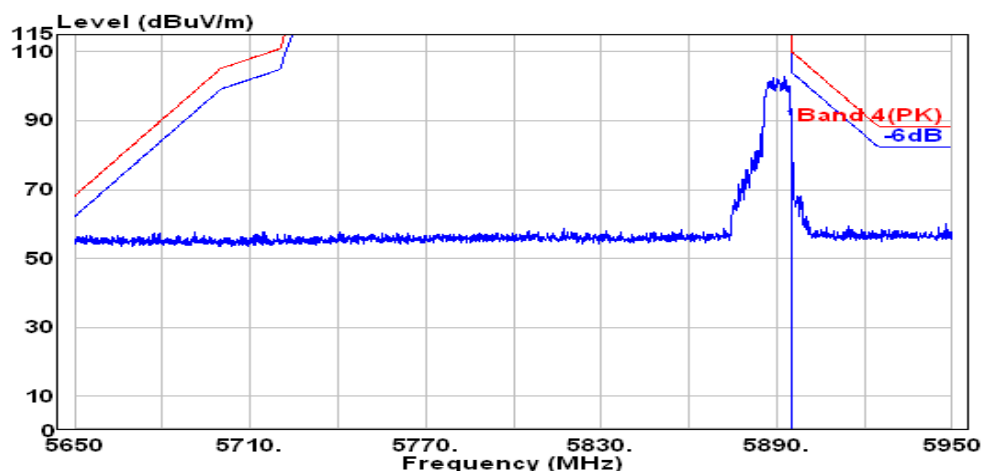

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	84.70	88.77	110.20	21.43	Peak

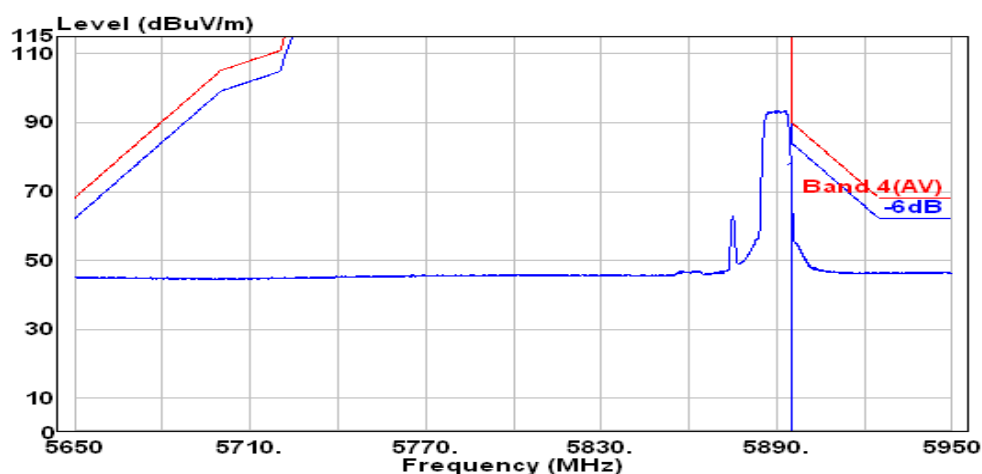


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	69.73	73.80	90.20	16.40	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	242/62	Frequency	TX 5875MHz

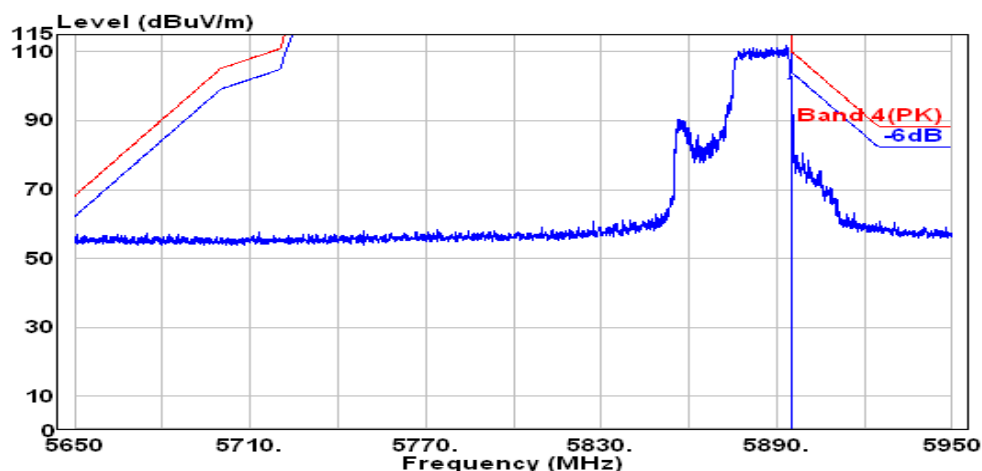

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	94.08	98.15	110.20	12.05	Peak

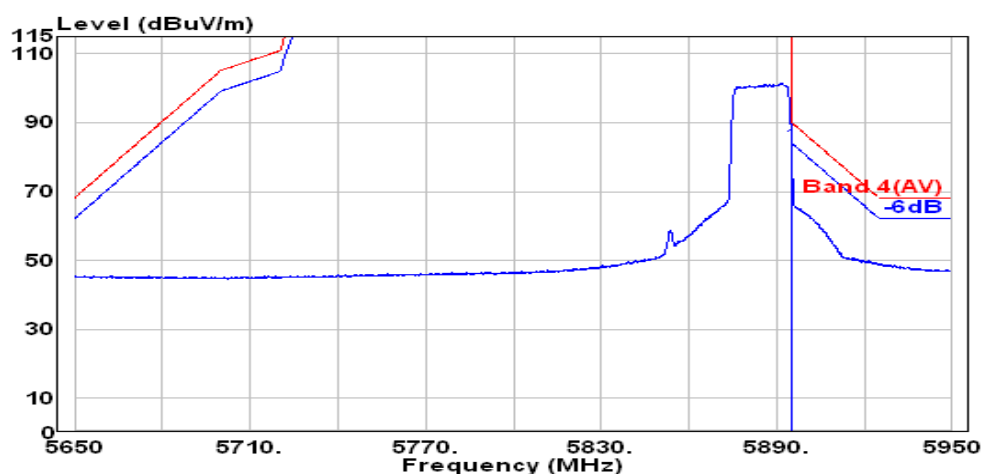

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.34	83.41	90.20	6.79	Average

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	242/62	Frequency	TX 5875MHz

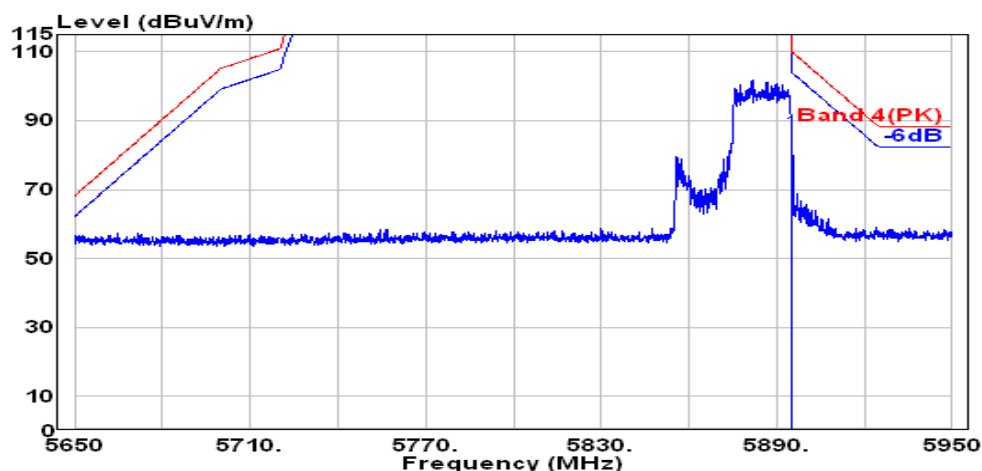

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	82.43	86.50	110.20	23.70	Peak

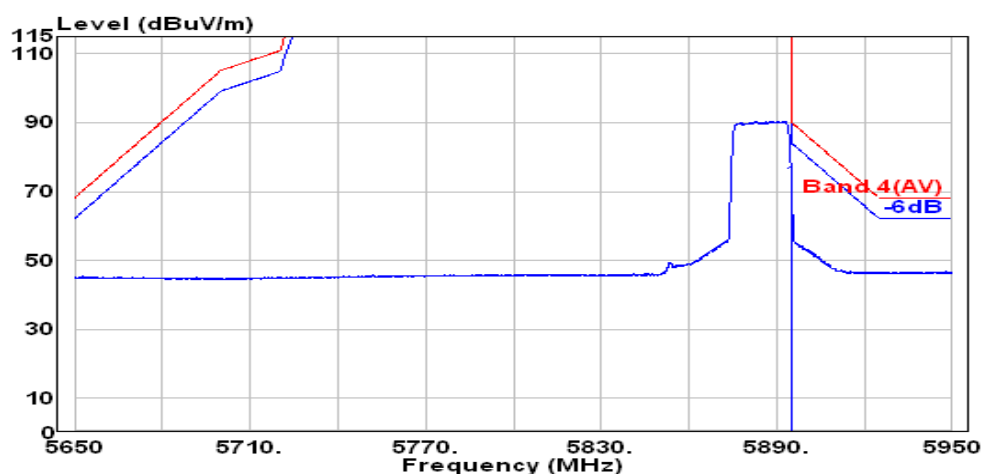

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	68.71	72.78	90.20	17.42	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

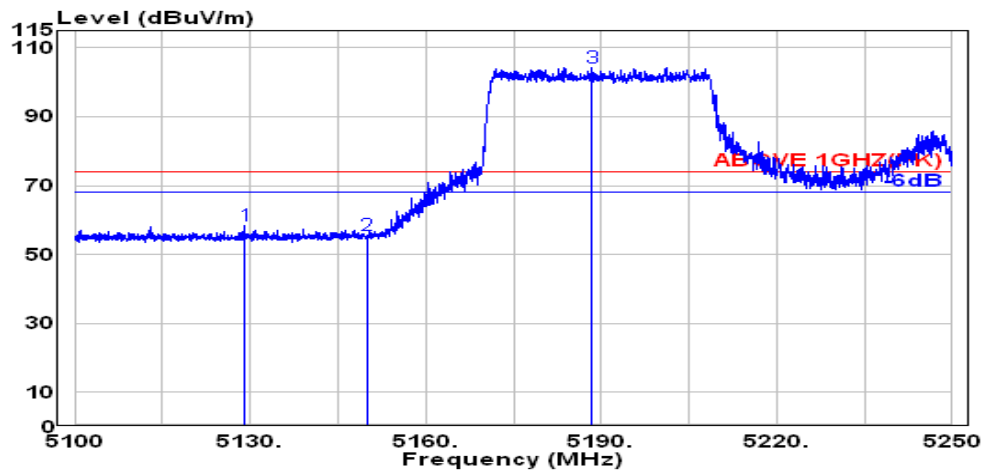

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.000	33.56	8.30	39.09	55.68	58.45	74.00	15.55	Peak
5150.000	33.60	8.33	39.09	52.82	55.65	74.00	18.35	Peak
@ 5188.400	33.60	8.37	39.09	101.45	104.33	---	---	Peak

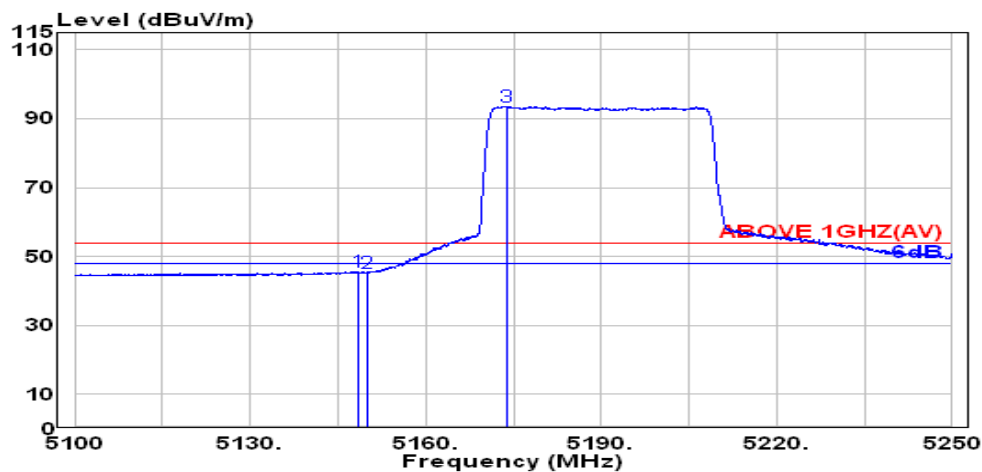

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.350	33.60	8.33	39.09	42.73	45.56	54.00	8.44	Average
5150.000	33.60	8.33	39.09	42.51	45.35	54.00	8.65	Average
@ 5173.750	33.60	8.35	39.09	90.78	93.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

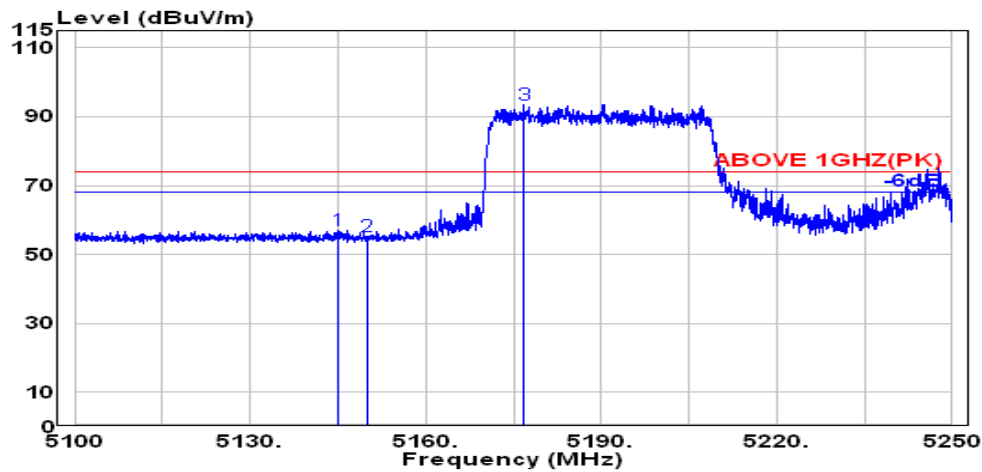

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.950	33.59	8.32	39.09	54.09	56.91	74.00	17.09	Peak
5150.000	33.60	8.33	39.09	52.39	55.23	74.00	18.77	Peak
@ 5176.750	33.60	8.36	39.09	90.75	93.62	---	---	Peak

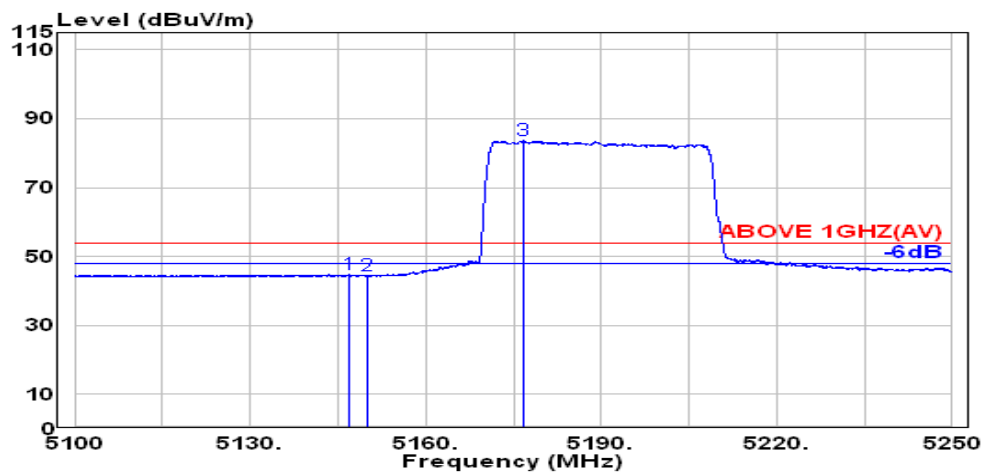

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.800	33.59	8.32	39.09	41.87	44.69	54.00	9.31	Average
5150.000	33.60	8.33	39.09	41.65	44.49	54.00	9.51	Average
@ 5176.700	33.60	8.36	39.09	80.72	83.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

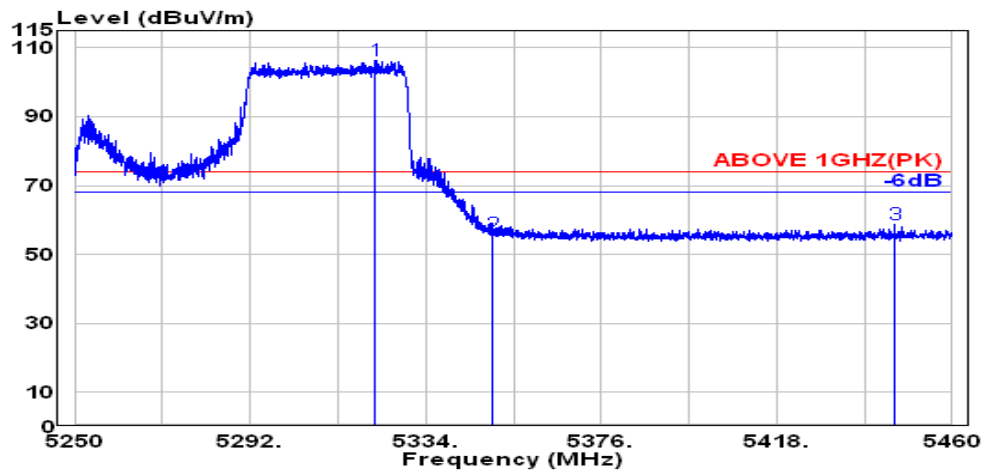

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.850	33.64	8.51	39.08	103.35	106.43	---	---	Peak
5350.000	33.70	8.54	39.08	52.91	56.08	74.00	17.92	Peak
5446.250	34.09	8.64	39.07	55.07	58.73	74.00	15.27	Peak

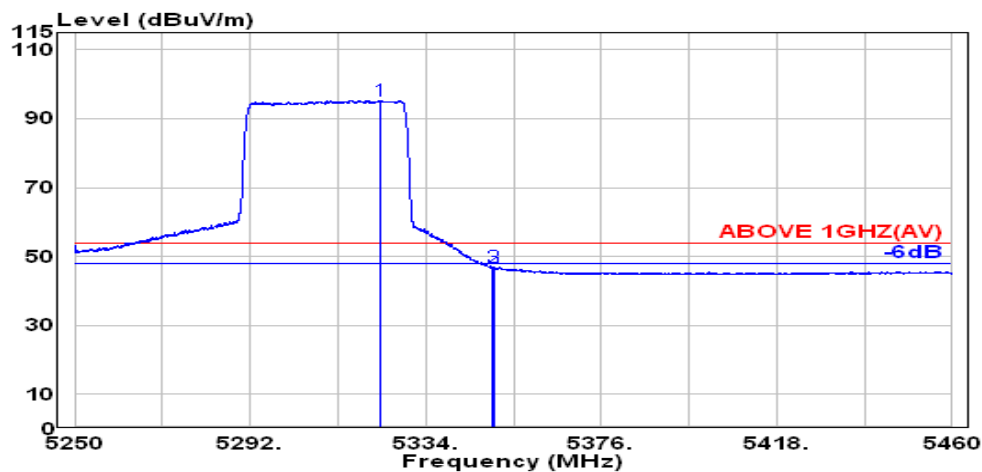

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	33.65	8.51	39.08	92.29	95.37	---	---	Average
5350.000	33.70	8.54	39.08	43.77	46.93	54.00	7.07	Average
5350.200	33.70	8.54	39.08	43.66	46.83	54.00	7.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

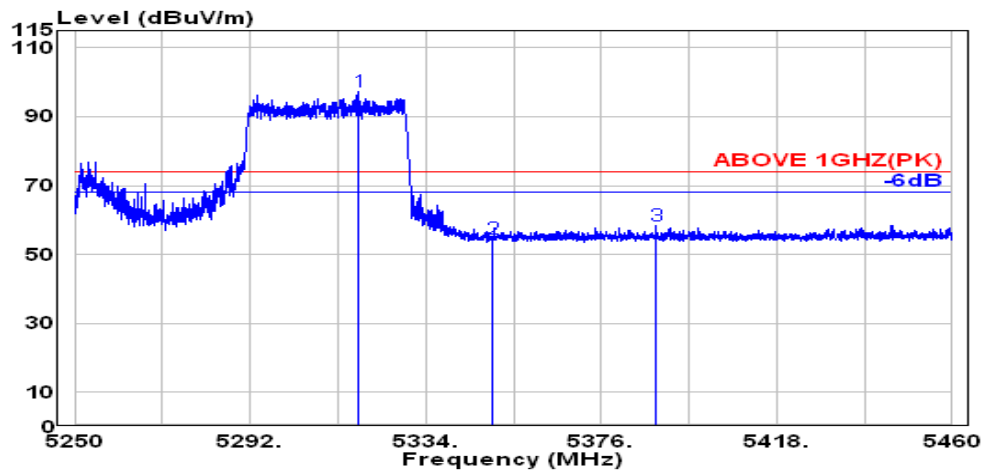

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.950	33.64	8.51	39.08	94.32	97.39	---	---	Peak
5350.000	33.70	8.54	39.08	51.43	54.60	74.00	19.40	Peak
5389.050	33.93	8.58	39.08	54.97	58.41	74.00	15.59	Peak

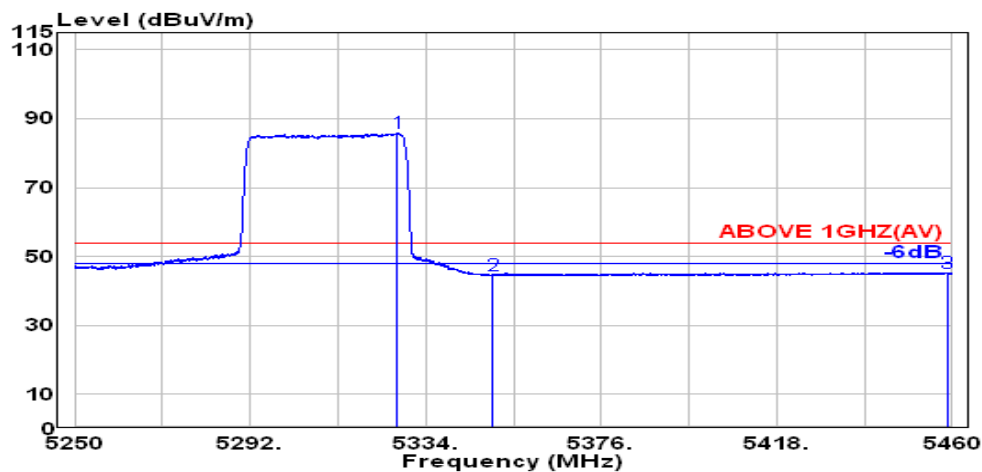

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.08	82.82	85.91	---	---	Average
5350.000	33.70	8.54	39.08	41.48	44.65	54.00	9.35	Average
5458.750	34.10	8.66	39.07	41.64	45.33	54.00	8.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

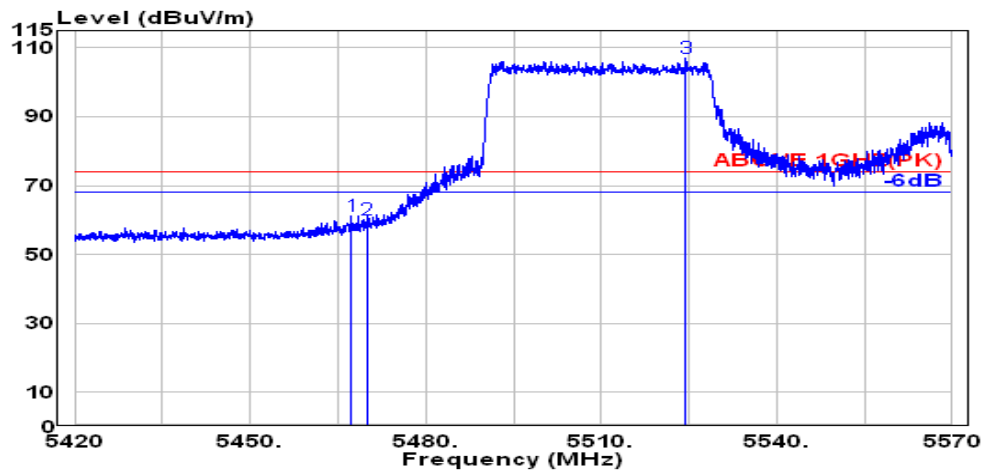

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.10	8.66	39.07	57.57	61.27	74.00	12.73	Peak
5470.000	34.10	8.67	39.07	56.33	60.02	74.00	13.98	Peak
@ 5524.450	34.05	8.72	39.08	103.39	107.09	---	---	Peak

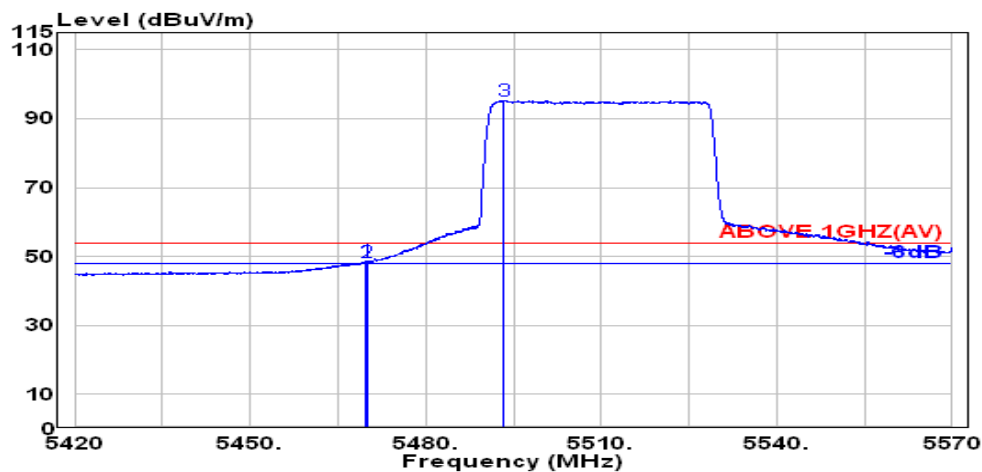

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.07	44.87	48.56	54.00	5.44	Average
5470.000	34.10	8.67	39.07	44.50	48.19	54.00	5.81	Average
@ 5493.400	34.10	8.69	39.07	91.63	95.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

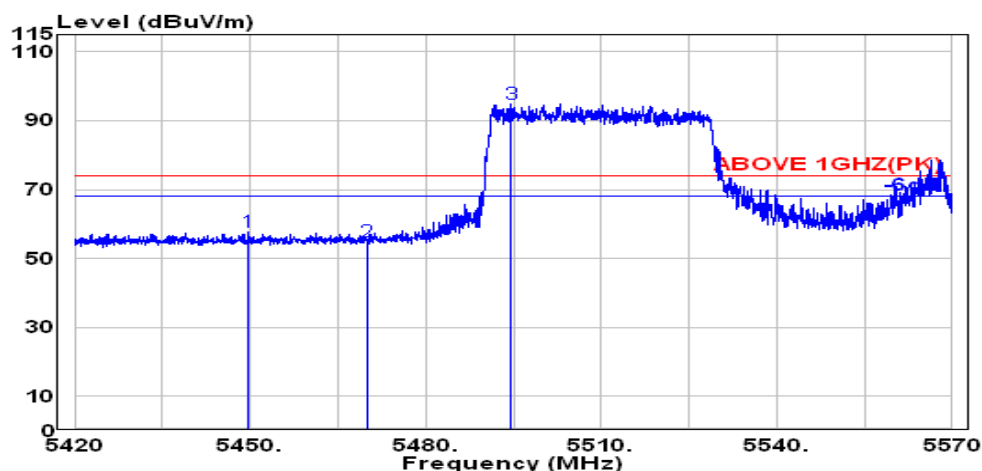

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.550	34.10	8.65	39.07	53.90	57.58	74.00	16.42	Peak
5470.000	34.10	8.67	39.07	51.18	54.87	74.00	19.13	Peak
@ 5494.600	34.10	8.69	39.07	91.28	95.00	---	---	Peak

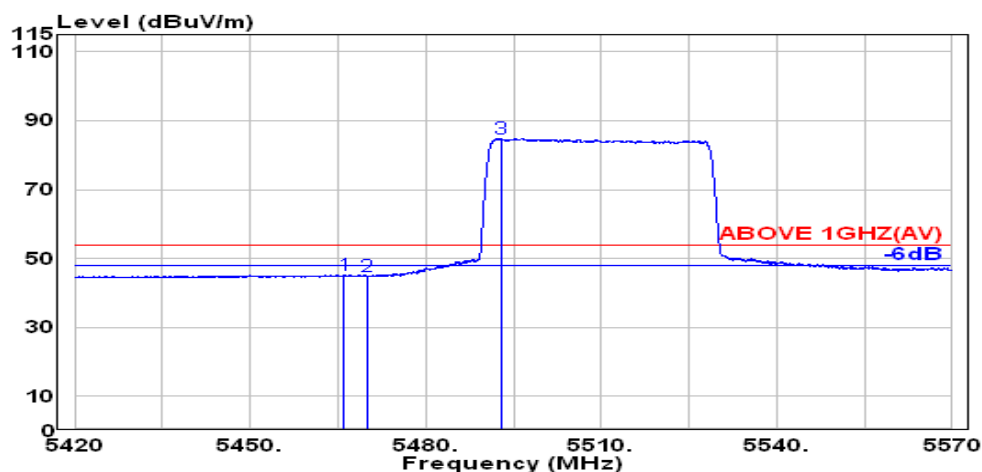

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.050	34.10	8.66	39.07	41.47	45.16	54.00	8.84	Average
5470.000	34.10	8.67	39.07	41.23	44.93	54.00	9.07	Average
@ 5492.800	34.10	8.69	39.07	81.22	84.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5530MHz

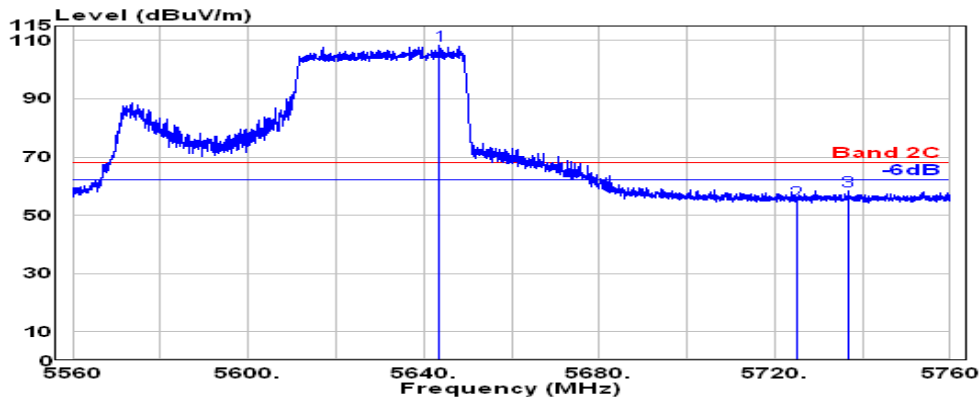

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5643.450	33.71	8.84	39.11	104.89	108.33	---	---	Peak
	5725.000	33.60	8.92	39.14	51.36	54.75	68.20	13.45	Peak
	5736.750	33.69	8.94	39.14	54.86	58.35	68.20	9.85	Peak

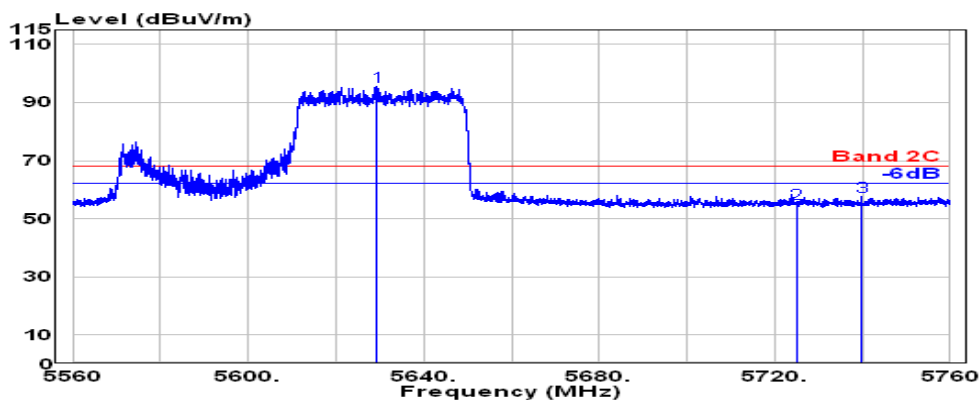

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5629.400	33.74	8.83	39.11	92.06	95.52	---	---	Peak
	5725.000	33.60	8.92	39.14	51.82	55.21	68.20	12.99	Peak
	5739.750	33.72	8.94	39.14	54.03	57.54	68.20	10.66	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
RU Configuration	484/66	Frequency	TX 5855MHz

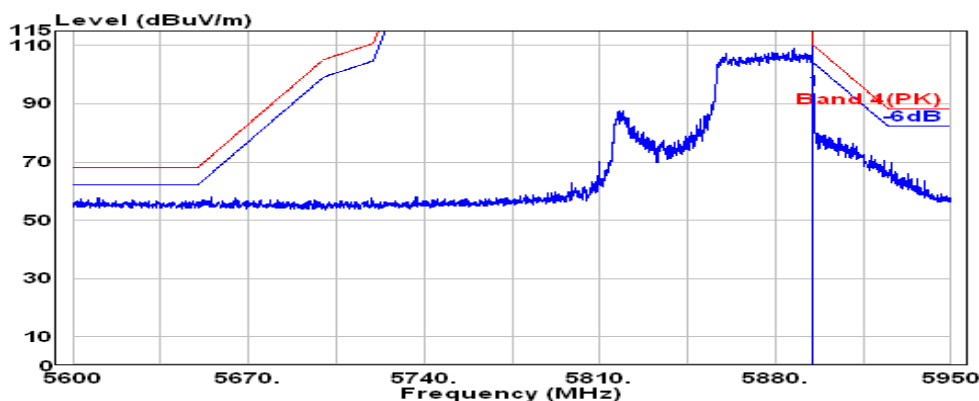

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	90.69	94.76	110.16	15.40	Peak

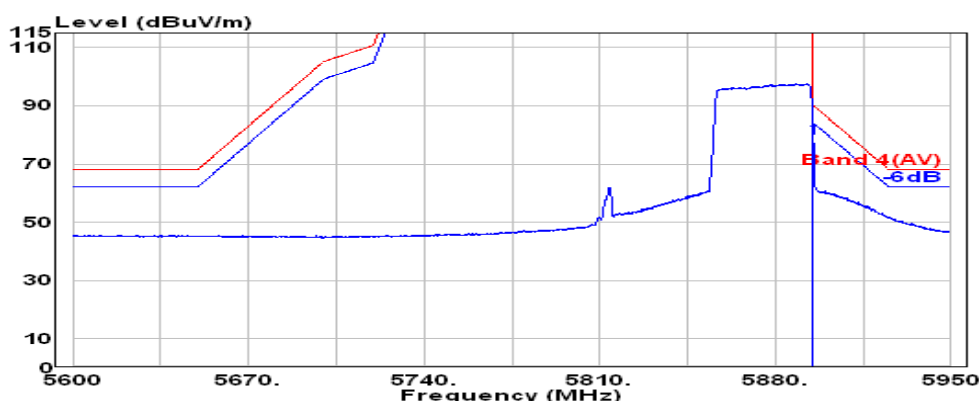


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	74.87	78.94	90.16	11.22	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
RU Configuration	484/66	Frequency	TX 5855MHz

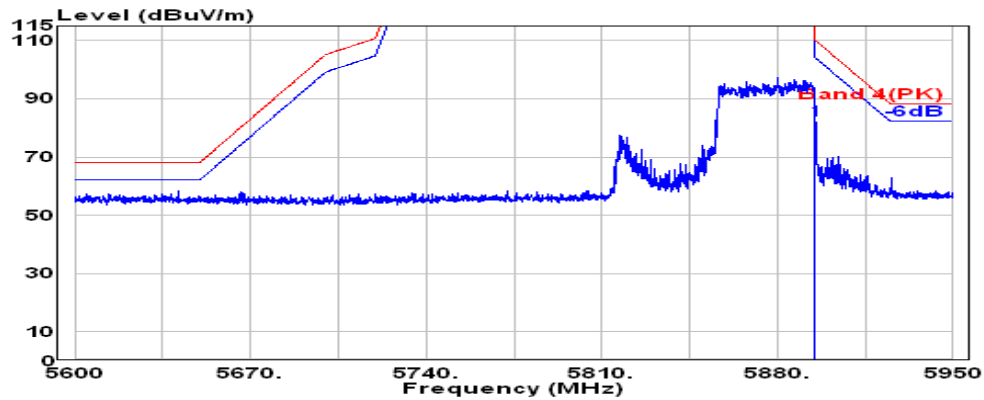

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	78.67	82.74	110.16	27.42	Peak

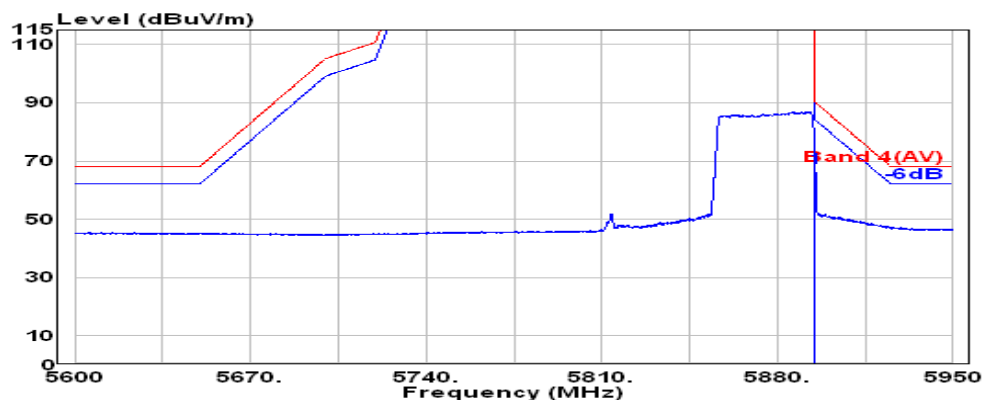

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	63.85	67.92	90.16	22.24	Average

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	36.88	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	37.77	48.76	54.00	5.24	Peak

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	37.76	48.87	54.00	5.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	38.73	49.84	54.00	4.16	Peak

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	38.12	49.38	54.00	4.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	36.56	47.82	54.00	6.18	Peak

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	35.62	46.98	54.00	7.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	37.51	48.88	54.00	5.12	Peak

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	36.22	47.86	54.00	6.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	36.36	48.00	54.00	6.00	Peak

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	36.44	48.13	54.00	5.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	36.38	48.07	54.00	5.93	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	36.10	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	35.91	48.38	54.00	5.62	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11200.000	38.60	13.15	39.00	34.92	47.68	54.00	6.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11200.000	38.60	13.15	39.00	35.33	48.08	54.00	5.92	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	36.69	49.92	54.00	4.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	36.45	49.68	54.00	4.32	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	35.78	49.10	54.00	4.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	36.03	49.35	54.00	4.65	Peak

Mode	802.11a	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	37.07	50.52	54.00	3.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	36.45	49.89	54.00	4.11	Peak

Mode	802.11a	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	35.32	49.00	54.00	5.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	35.68	49.35	54.00	4.65	Peak

Mode	802.11a	U-NII Band	U-NII Band 3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	34.11	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	36.36	50.22	54.00	3.78	Peak

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5845MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	34.92	48.86	54.00	5.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	34.53	48.47	54.00	5.53	Peak

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5865MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	36.92	50.91	54.00	3.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	34.94	48.92	54.00	5.08	Peak

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	34.69	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	36.40	50.42	54.00	3.58	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	37.36	48.35	54.00	5.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	36.71	47.70	54.00	6.30	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	36.91	48.01	54.00	5.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	37.11	48.21	54.00	5.79	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	36.32	47.58	54.00	6.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	37.78	49.05	54.00	4.95	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	36.90	48.27	54.00	5.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	38.46	49.83	54.00	4.17	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	37.27	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	36.09	47.72	54.00	6.28	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	37.37	49.06	54.00	4.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	37.03	48.72	54.00	5.28	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	35.43	47.90	54.00	6.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	36.43	48.90	54.00	5.10	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.56	13.09	39.00	36.75	49.41	54.00	4.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.56	13.09	39.00	34.92	47.57	54.00	6.43	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	35.60	48.83	54.00	5.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	35.49	48.72	54.00	5.28	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	36.32	49.65	54.00	4.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	35.27	48.59	54.00	5.41	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	35.55	48.99	54.00	5.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	35.18	48.63	54.00	5.37	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	36.94	50.61	54.00	3.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	37.30	50.97	54.00	3.03	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	34.48	48.34	54.00	5.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	35.07	48.93	54.00	5.07	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5845MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	34.59	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	35.88	49.82	54.00	4.18	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5865MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	35.33	49.31	54.00	4.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	35.68	49.66	54.00	4.34	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	34.89	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	35.22	49.24	54.00	4.76	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.08	12.35	39.39	38.35	49.40	54.00	4.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.08	12.35	39.39	37.51	48.55	54.00	5.45	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.10	12.42	39.30	37.22	48.45	54.00	5.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.10	12.42	39.30	36.47	47.70	54.00	6.30	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.18	12.48	39.23	37.54	48.98	54.00	5.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.18	12.48	39.23	37.30	48.73	54.00	5.27	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.30	12.54	39.18	36.81	48.48	54.00	5.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.30	12.54	39.18	37.29	48.95	54.00	5.05	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.58	12.87	38.97	37.19	49.67	54.00	4.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.58	12.87	38.97	37.72	50.20	54.00	3.80	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.50	13.00	38.99	37.35	49.86	54.00	4.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.50	13.00	38.99	37.81	50.32	54.00	3.68	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.68	13.37	39.02	35.53	48.56	54.00	5.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.68	13.37	39.02	35.82	48.84	54.00	5.16	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.82	13.49	39.04	36.00	49.28	54.00	4.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.82	13.49	39.04	35.57	48.85	54.00	5.15	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.92	13.63	39.06	35.40	48.89	54.00	5.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.92	13.63	39.06	35.75	49.25	54.00	4.75	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.08	13.75	39.10	34.52	48.25	54.00	5.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.08	13.75	39.10	35.39	49.13	54.00	4.87	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.17	13.87	39.15	35.07	48.97	54.00	5.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.17	13.87	39.15	35.05	48.95	54.00	5.05	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11750.000	39.20	13.99	39.19	35.57	49.57	54.00	4.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11750.000	39.20	13.99	39.19	34.59	48.59	54.00	5.41	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.10	12.39	39.34	37.49	48.63	54.00	5.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.10	12.39	39.34	36.55	47.69	54.00	6.31	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.26	12.51	39.20	36.70	48.27	54.00	5.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.26	12.51	39.20	36.88	48.45	54.00	5.55	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.54	12.94	38.98	36.42	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.54	12.94	38.98	36.00	48.49	54.00	5.51	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.60	13.19	39.01	35.03	47.81	54.00	6.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.60	13.19	39.01	36.56	49.34	54.00	4.66	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.76	13.43	39.03	36.31	49.47	54.00	4.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.76	13.43	39.03	36.37	49.53	54.00	4.47	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.00	13.69	39.08	35.68	49.30	54.00	4.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.00	13.69	39.08	35.00	48.61	54.00	5.39	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.20	13.93	39.17	35.41	49.37	54.00	4.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.20	13.93	39.17	35.10	49.06	54.00	4.94	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	37.67	48.66	54.00	5.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.06	12.34	39.41	37.33	48.31	54.00	5.69	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	36.95	48.06	54.00	5.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.10	12.37	39.36	36.36	47.47	54.00	6.53	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	38.53	49.79	54.00	4.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.10	12.43	39.27	36.97	48.23	54.00	5.77	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	36.68	48.05	54.00	5.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.14	12.47	39.24	36.83	48.20	54.00	5.80	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	37.61	49.24	54.00	4.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.30	12.53	39.19	37.14	48.78	54.00	5.22	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	37.55	49.24	54.00	4.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.30	12.56	39.17	38.69	50.38	54.00	3.62	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	36.01	48.48	54.00	5.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.60	12.84	38.97	37.22	49.69	54.00	4.31	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.56	13.09	39.00	36.07	48.73	54.00	5.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.56	13.09	39.00	36.05	48.70	54.00	5.30	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	35.02	48.25	54.00	5.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.80	13.46	39.03	35.43	48.66	54.00	5.34	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	34.97	48.30	54.00	5.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.84	13.53	39.04	36.19	49.51	54.00	4.49	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	36.42	49.86	54.00	4.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.89	13.60	39.05	35.89	49.33	54.00	4.67	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	34.73	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.04	13.72	39.09	35.79	49.46	54.00	4.54	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	34.99	48.84	54.00	5.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.15	13.84	39.14	36.14	50.00	54.00	4.00	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5845MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	34.54	48.48	54.00	5.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.19	13.90	39.16	34.85	48.79	54.00	5.21	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5865MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	34.85	48.83	54.00	5.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11730.000	39.20	13.96	39.18	35.62	49.60	54.00	4.40	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	36.31	50.33	54.00	3.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11770.000	39.20	14.02	39.20	35.20	49.22	54.00	4.78	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.08	12.35	39.39	37.07	48.12	54.00	5.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.08	12.35	39.39	38.75	49.79	54.00	4.21	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.10	12.42	39.30	37.35	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.10	12.42	39.30	38.11	49.34	54.00	4.66	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.18	12.48	39.23	36.04	47.48	54.00	6.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.18	12.48	39.23	36.28	47.72	54.00	6.28	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.30	12.54	39.18	37.22	48.88	54.00	5.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.30	12.54	39.18	38.14	49.80	54.00	4.20	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.58	12.87	38.97	36.17	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.58	12.87	38.97	36.56	49.04	54.00	4.96	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.50	13.00	38.99	36.36	48.88	54.00	5.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.50	13.00	38.99	36.63	49.15	54.00	4.85	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.68	13.37	39.02	36.75	49.77	54.00	4.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.68	13.37	39.02	36.40	49.42	54.00	4.58	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.82	13.49	39.04	36.21	49.49	54.00	4.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.82	13.49	39.04	36.56	49.84	54.00	4.16	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.92	13.63	39.06	36.04	49.54	54.00	4.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.92	13.63	39.06	35.92	49.41	54.00	4.59	Peak

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5795MHz

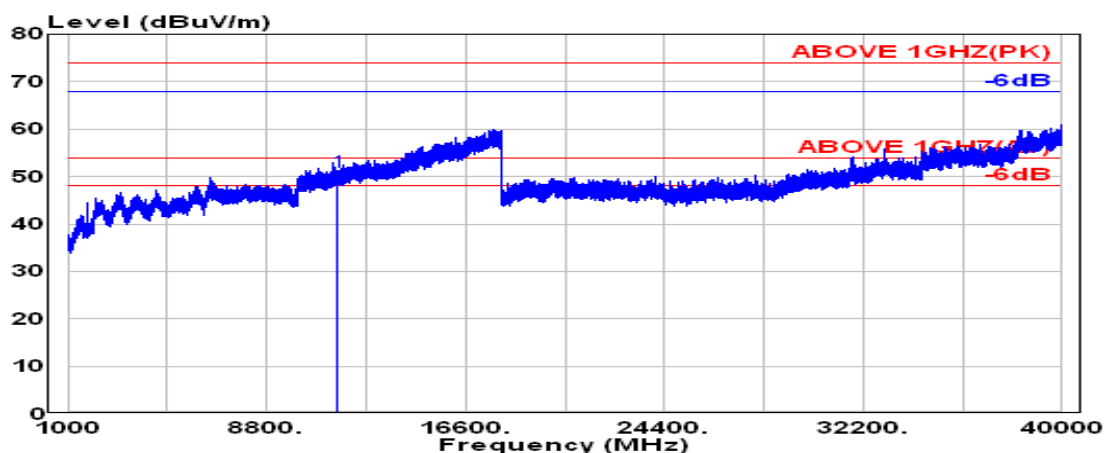

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
11590.000	39.08	13.75	39.10	37.39	51.12	54.00	2.88	Peak

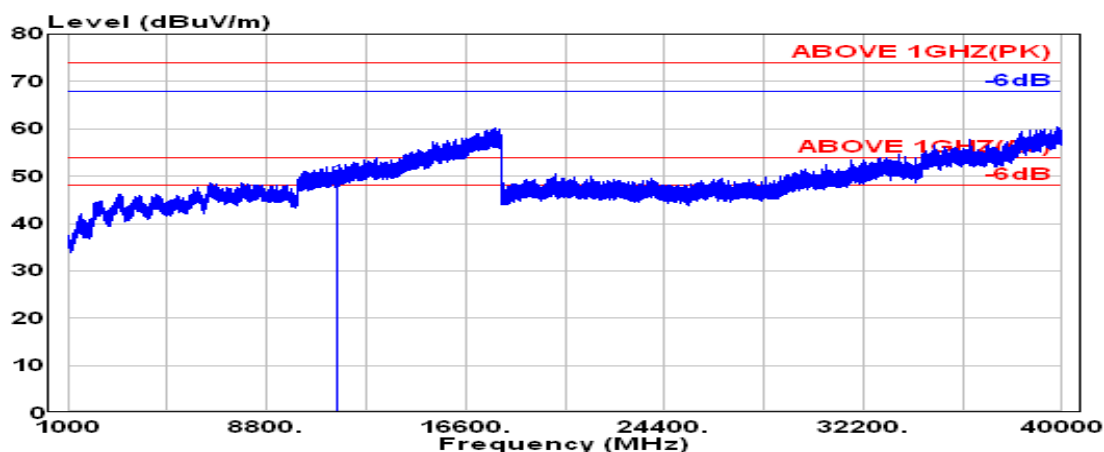

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
11590.000	39.08	13.75	39.10	35.23	48.96	54.00	5.04	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.17	13.87	39.15	37.08	50.97	54.00	3.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.17	13.87	39.15	36.16	50.05	54.00	3.95	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11750.000	39.20	13.99	39.19	36.03	50.03	54.00	3.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11750.000	39.20	13.99	39.19	36.38	50.38	54.00	3.62	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.10	12.39	39.34	37.58	48.72	54.00	5.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.10	12.39	39.34	37.45	48.59	54.00	5.41	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.26	12.51	39.20	35.71	47.28	54.00	6.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.26	12.51	39.20	36.63	48.20	54.00	5.80	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.54	12.94	38.98	36.27	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.54	12.94	38.98	35.82	48.31	54.00	5.69	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.60	13.19	39.01	35.66	48.44	54.00	5.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.60	13.19	39.01	35.67	48.45	54.00	5.55	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.76	13.43	39.03	37.17	50.34	54.00	3.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.76	13.43	39.03	35.62	48.78	54.00	5.22	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.00	13.69	39.08	35.86	49.48	54.00	4.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.00	13.69	39.08	35.76	49.38	54.00	4.62	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.20	13.93	39.17	35.44	49.40	54.00	4.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.20	13.93	39.17	35.94	49.90	54.00	4.10	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH

Test Date	2025/10/23 ~11/10	Temp./Hum.	22 ~ 23°C /63 ~ 68%
Cable Loss	1.73dB	Tested By	Sean Wang
Test Voltage	DC 5V (Through jig via Notebook PC)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5180	25.27	23.88	16.744	16.779	15.33	15.62	0.878	16.50	24	N/A
	5200	29.17	25.35	16.696	16.737	15.45	15.55		16.43		
	5240	19.72	19.40	16.574	16.556	15.54	15.47		16.42		
U-NII Band 2A	5260	20.42	20.57	16.568	16.543	17.15	17.08		18.03		24.10
	5300	23.90	24.99	16.689	16.779	16.91	17.26		18.14		24.78
	5320	26.06	21.19	16.770	16.654	16.98	17.26		18.14		24.26
U-NII Band 2C	5500	24.72	26.44	16.716	16.624	11.22	11.70		12.58		24.93
	5580	20.16	21.93	16.468	16.616	12.64	13.18		14.06		24.04
	5700	25.13	22.64	16.702	16.683	10.98	11.32		12.20		24.55
	5720	19.93	20.35	16.489	16.446	11.39	11.66		12.54		24.00
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5745	12.61	15.09	16.643	16.601	15.26	15.60	0.878	16.48	30	N/A
	5785	16.08	15.08	16.601	16.510	15.94	16.45		17.33		
	5825	16.13	15.29	16.784	16.642	15.99	16.33		17.21		

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Antenna Gain (dBi)		Max Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB)		Occupied (99%) Bandwidth					ANT0	ANT1		
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1		ANT0	ANT1		
U-NII Band 4	5845	16.34	16.30	16.513	16.496	13.82	14.24	1.169	-2.94	-0.1	15.31	30
	5865	15.98	14.87	16.543	16.500	13.03	13.22		-2.94	-0.1	14.29	
	5885	16.37	13.84	16.530	16.471	13.06	13.35		-2.89	0.37	14.89	

Note: 1. The results have been included cable loss.

2. Max Average Output Power (EIRP) = Max of average output power (Ant1 or Ant2) (dBm)+ Antenna Gain (dBi)
+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5180	26.71	27.36	17.893	17.868	8.95	8.88	0.931	12.86	24	N/A
	5200	28.81	26.04	17.974	17.856	9.06	8.76		12.85		
	5240	20.54	20.10	17.689	17.657	9.18	8.86		12.96		
U-NII Band 2A	5260	20.65	20.42	17.656	17.628	13.54	13.05		17.24		24.10
	5300	27.93	26.46	18.035	17.848	13.06	12.98		16.96		25.23
	5320	26.89	27.04	17.975	17.878	13.14	13.35		17.19		25.30
U-NII Band 2C	5500	27.14	24.92	17.859	17.844	12.05	12.33		16.13		24.97
	5580	21.02	20.99	17.674	17.657	13.51	14.14		17.78		24.22
	5700	24.81	25.75	17.863	17.813	11.82	12.17		15.94		24.95
	5720	21.22	20.87	17.702	17.628	12.22	12.54		16.32		24.20
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5745	15.04	15.71	17.840	17.824	14.11	14.35	0.931	18.17	30	N/A
	5785	17.32	17.30	17.718	17.761	14.71	15.04		18.82		
	5825	15.46	17.61	17.964	17.703	14.92	15.03		18.92		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5845	14.89	15.11	17.669	17.686	14.22	14.35	1.244	-0.96	17.58	30
	5865	17.58	17.61	17.696	17.614	13.86	14.02		-0.96	17.24	
	5885	15.68	16.57	17.717	17.718	13.96	14.13		-0.96	17.34	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+
Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5190	57.70	48.32	36.323	36.309	11.25	11.57	1.707	16.13	24	N/A
	5230	40.69	39.12	36.058	36.193	11.30	11.45		16.09		
U-NII Band 2A	5270	40.54	39.53	36.131	36.120	12.63	12.32		17.20		26.97
	5310	55.83	40.90	36.323	36.258	12.43	12.79		17.33		27.12
U-NII Band 2C	5510	56.67	46.10	36.364	36.194	10.41	10.83		15.34		27.64
	5550	40.65	39.90	36.187	36.006	11.65	12.41		16.76		27.01
	5670	60.61	48.44	36.435	36.444	10.76	11.45		15.84		27.85
	5710	40.57	39.98	36.177	36.240	10.56	10.95		15.48		27.02
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5755	32.57	33.92	36.383	36.290	14.66	15.04	1.707	19.57	30	N/A
	5795	35.19	35.12	36.129	36.126	15.17	15.52		20.07		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5835	35.18	33.93	36.092	36.142	14.65	14.75	2.161	-0.96	18.91	30
	5875	31.48	31.41	36.146	36.102	13.86	14.21		-0.96	18.25	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5210	101.80	97.13	75.467	75.449	8.81	7.74	2.495	13.81	24	N/A
U-NII Band 2A	5290	106.80	98.26	75.712	75.580	13.19	11.98		18.13		30.92
U-NII Band 2C	5530	100.50	86.49	75.734	75.323	11.02	10.19		16.13		30.37
	5610	79.16	79.39	75.369	75.295	12.42	12.39		17.91		29.99
	5690	79.06	79.17	75.333	75.329	11.32	10.94		16.64		29.98
Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5775	75.33	74.21	75.322	75.177	13.25	12.33	2.495	18.32	30	N/A

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5855	75.37	74.03	76.07	75.98	12.35	10.74	5.031	-0.96	18.70	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5180	21.69	21.49	18.853	18.964	7.92	8.27	1.925	13.03	24	N/A
	5200	21.65	21.09	18.881	18.916	8.17	8.32		13.18		
	5240	19.87	19.79	18.894	18.813	8.27	8.10		13.12		
U-NII Band 2A	5260	21.40	21.51	18.979	18.912	12.46	12.15		17.24		24.30
	5300	20.61	21.76	18.838	18.978	12.35	12.56		17.39		24.14
	5320	21.31	21.40	18.842	18.911	12.53	12.62		17.51		24.29
U-NII Band 2C	5500	22.08	20.84	18.910	18.825	9.38	9.73		14.49		24.19
	5580	21.24	20.93	18.897	18.867	10.73	11.32		15.97		24.21
	5700	21.00	20.81	18.915	18.784	9.22	9.56		14.33		24.18
	5720	21.22	20.77	18.832	18.857	9.58	9.94		14.70		24.17
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5745	15.89	16.82	18.850	18.833	12.02	12.39	1.925	17.14	30	N/A
	5785	18.38	13.96	18.919	18.889	13.59	14.01		18.74		
	5825	16.60	16.63	18.916	18.878	13.90	14.08		18.93		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5845	16.35	16.60	18.916	18.877	13.64	13.86	2.449	-0.96	18.25	30
	5865	15.10	15.09	18.804	18.858	12.70	12.92		-0.96	17.31	
	5885	16.60	17.22	18.896	18.857	12.77	12.98		-0.96	17.38	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5190	39.33	39.93	37.592	37.608	8.53	8.74	2.976	14.62	24	N/A
	5230	39.44	39.37	37.670	37.536	8.60	8.53		14.55		
U-NII Band 2A	5270	39.25	39.54	37.642	37.498	11.45	11.15		17.29		26.94
	5310	39.41	39.36	37.562	37.480	11.41	11.58		17.48		26.95
U-NII Band 2C	5510	39.42	39.47	37.662	37.466	7.23	7.72		13.47		26.96
	5550	39.45	39.51	37.459	37.489	8.45	9.06		14.75		26.96
	5670	39.43	39.36	37.628	37.603	7.54	8.17		13.85		26.95
	5710	39.47	39.36	37.493	37.483	7.38	7.67		13.51		26.95
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5755	35.21	35.16	37.532	37.561	12.61	13.02	2.976	18.81	30	N/A
	5795	35.52	35.21	37.632	37.438	13.06	13.40		19.22		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5835	36.36	33.88	37.667	37.675	13.51	13.66	3.585	-0.96	19.22	30
	5875	35.10	33.91	37.577	37.785	13.57	13.84		-0.96	19.34	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5210	79.86	80.42	76.880	76.925	6.53	8.10	2.464	12.86	24	N/A
U-NII Band 2A	5290	80.00	80.09	76.759	76.692	7.39	6.75		12.56		30.03
U-NII Band 2C	5530	80.11	80.07	77.183	76.724	4.82	5.53		10.66		30.03
	5610	80.05	79.90	76.826	77.060	6.29	7.47		12.39		30.03
	5690	79.73	79.95	76.761	76.970	5.02	6.15		11.10		30.02
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5775	74.11	75.13	76.628	76.936	8.93	9.79	2.464	14.86	30	N/A

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5855	75.25	75.17	77.419	77.206	11.57	11.01	4.989	-0.96	18.34	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5190	26/0	39.33	39.93	37.592	37.608	0.32	0.71	2.716	6.25	24	N/A
		52/37	39.33	39.93	37.592	37.608	3.05	3.11	2.899	8.99		
		106/53	39.33	39.93	37.592	37.608	5.99	6.17	3.089	12.18		
U-NII Band 2A	5310	26/17	39.41	39.36	37.562	37.480	5.08	5.42	2.716	10.98		26.95
		52/44	39.41	39.36	37.562	37.480	7.12	7.33	2.899	13.14		26.95
		106/56	39.41	39.36	37.562	37.480	10.48	10.91	3.089	16.80		26.95
U-NII Band 2C	5510	26/0	39.45	39.51	37.459	37.489	4.46	4.85	2.716	10.39		26.96
		52/37	39.45	39.51	37.459	37.489	6.43	6.69	2.899	12.47		26.96
		106/53	39.45	39.51	37.459	37.489	7.77	8.14	3.089	14.06		26.96
	5670	26/17	39.43	39.36	37.628	37.603	4.59	5.38	2.716	10.73		26.95
		52/44	39.43	39.36	37.628	37.603	6.54	7.27	2.899	12.83		26.95
		106/56	39.43	39.36	37.628	37.603	7.94	8.33	3.089	14.24		26.95
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5755	26/0	35.21	35.16	37.532	37.561	8.89	9.22	2.716	14.78	30	N/A
		52/37	35.21	35.16	37.532	37.561	8.49	8.95	2.899	14.64		
		106/53	35.21	35.16	37.532	37.561	9.45	9.72	3.089	15.69		
	5795	26/17	35.52	35.21	37.632	37.438	9.22	9.49	2.716	15.08		
		52/44	35.52	35.21	37.632	37.438	9.03	9.21	2.899	15.03		
		106/56	35.52	35.21	37.632	37.438	9.80	10.05	3.089	16.03		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configurati on	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) Note 3	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
			Emission (6dB Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5835	26/0	36.36	33.88	37.667	37.675	6.94	7.16	3.29	-0.96	12.39	30
		52/37	36.36	33.88	37.667	37.675	8.64	8.32	3.58	-0.96	14.11	
		106/53	36.36	33.88	37.667	37.675	11.38	11.47	3.87	-0.96	17.35	
	5875	26/17	35.10	33.91	37.577	37.785	5.73	6.14	3.29	-0.96	11.28	
		52/44	35.10	33.91	37.577	37.785	7.71	7.61	3.58	-0.96	13.29	
		106/56	35.10	33.91	37.577	37.785	10.52	10.66	3.87	-0.96	16.51	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 1dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5190	242/61	39.33	39.93	37.592	37.608	7.57	7.94	3.410	14.18	24	N/A
U-NII Band 2A	5310	242/62	39.41	39.36	37.562	37.480	11.63	11.36		17.92		26.95
U-NII Band 2C	5510	242/61	39.42	39.47	37.662	37.466	7.97	8.19		14.50		26.96
	5670	242/62	39.43	39.36	37.628	37.603	8.33	8.87		15.03		26.95
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 1dBm+ 10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5755	242/61	35.21	35.16	37.532	37.561	10.04	10.25	3.410	16.57	30	N/A
	5795	242/62	35.52	35.21	37.632	37.438	10.30	10.71		16.93		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configurati on	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) Note 3	Total Average Output Power (EIRP) Note 2	Limit (EIRP)
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5835	242/61	36.36	33.88	37.667	37.675	13.11	13.20	4.330	-0.96	19.54	30
	5875	242/62	35.10	33.91	37.577	37.785	12.21	12.68	4.330	-0.96	18.83	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 1	5210	484/65	79.86	80.42	76.880	76.925	7.88	8.20	3.716	14.77	24	N/A
U-NII Band 2A	5290	484/66	80.00	80.09	76.759	76.692	10.35	10.02		16.91		30.03
U-NII Band 2C	5530	484/65	80.11	80.07	77.183	76.724	6.68	7.13		13.64		30.03
	5610	484/66	80.05	79.90	76.826	77.060	8.16	8.79		15.21		30.03
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 3	5775	484/65	74.11	75.13	76.628	76.936	8.85	9.23	3.716	15.77	30	N/A
		484/66	74.11	75.13	76.628	76.936	9.02	9.41		15.95		

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

4. We only presented the middle channel plots for each test mode.

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) NoE3	Total Average Output Power (EIRP) ^{NoE2}	Limit (EIRP)
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
			ANT0	ANT1	ANT0	ANT1	ANT0	ANT1				
U-NII Band 4	5855	484/65	75.25	75.17	77.419	77.206	12.40	12.62	4.191	-0.96	18.75	30
		484/66	75.25	75.17	77.419	77.206	12.63	12.85	4.191	-0.96	18.98	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{-2.89/10} + 10^{0.37/10})/2] = -0.96 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


4. We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

- Maximum Output Power

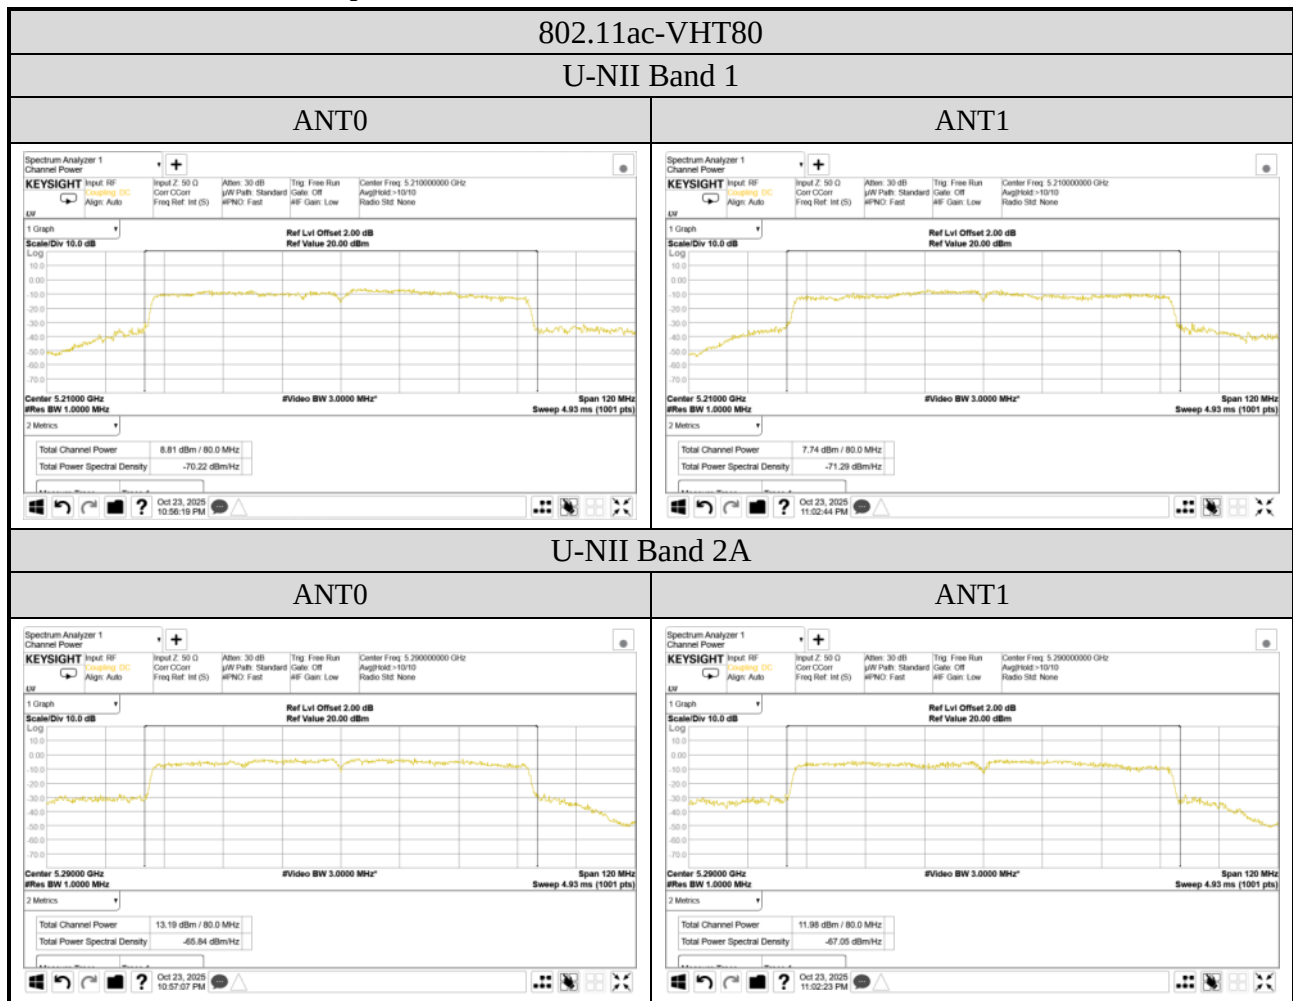

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



802.11ac-VHT80

U-NII Band 2C


ANT0



ANT1

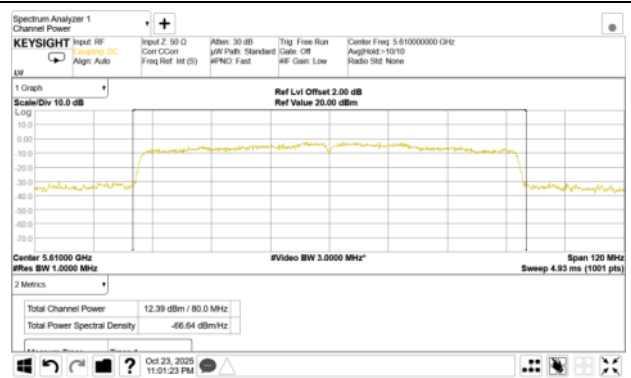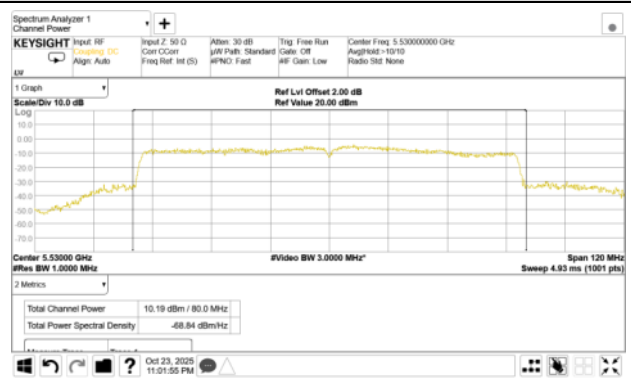


U-NII Band 3

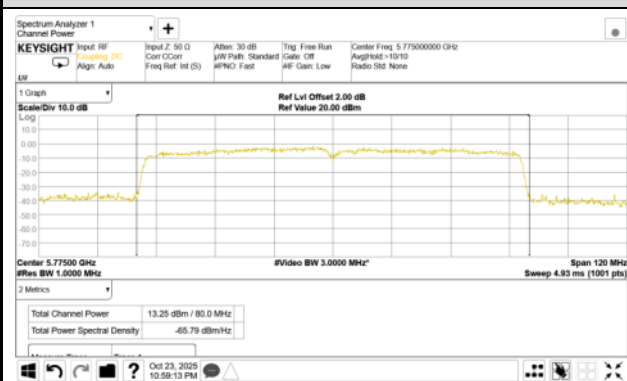


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

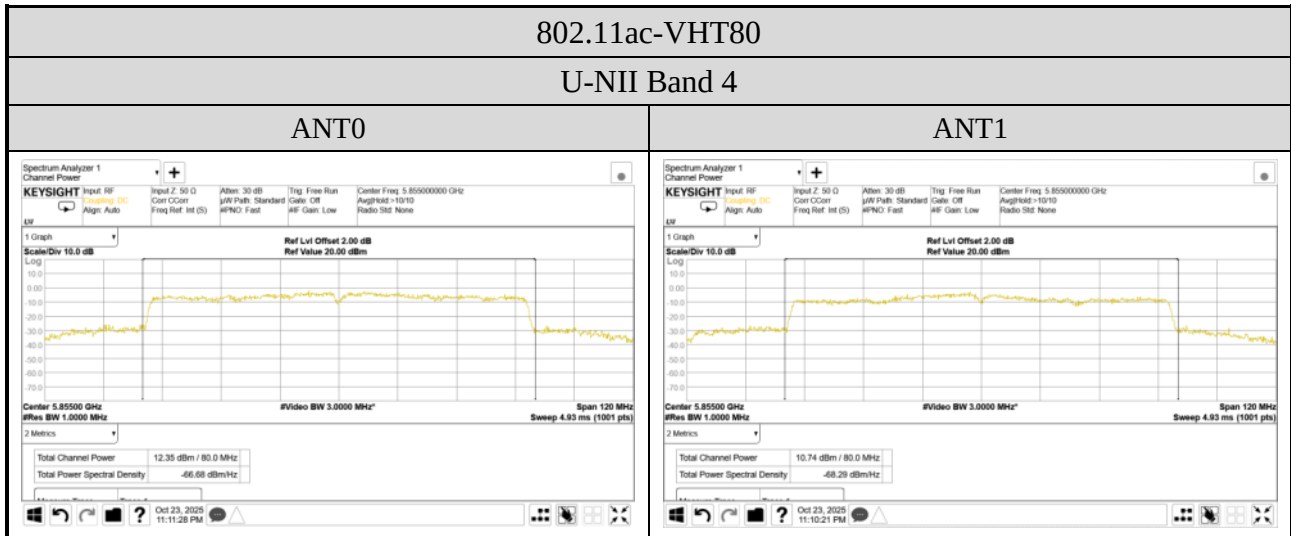


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

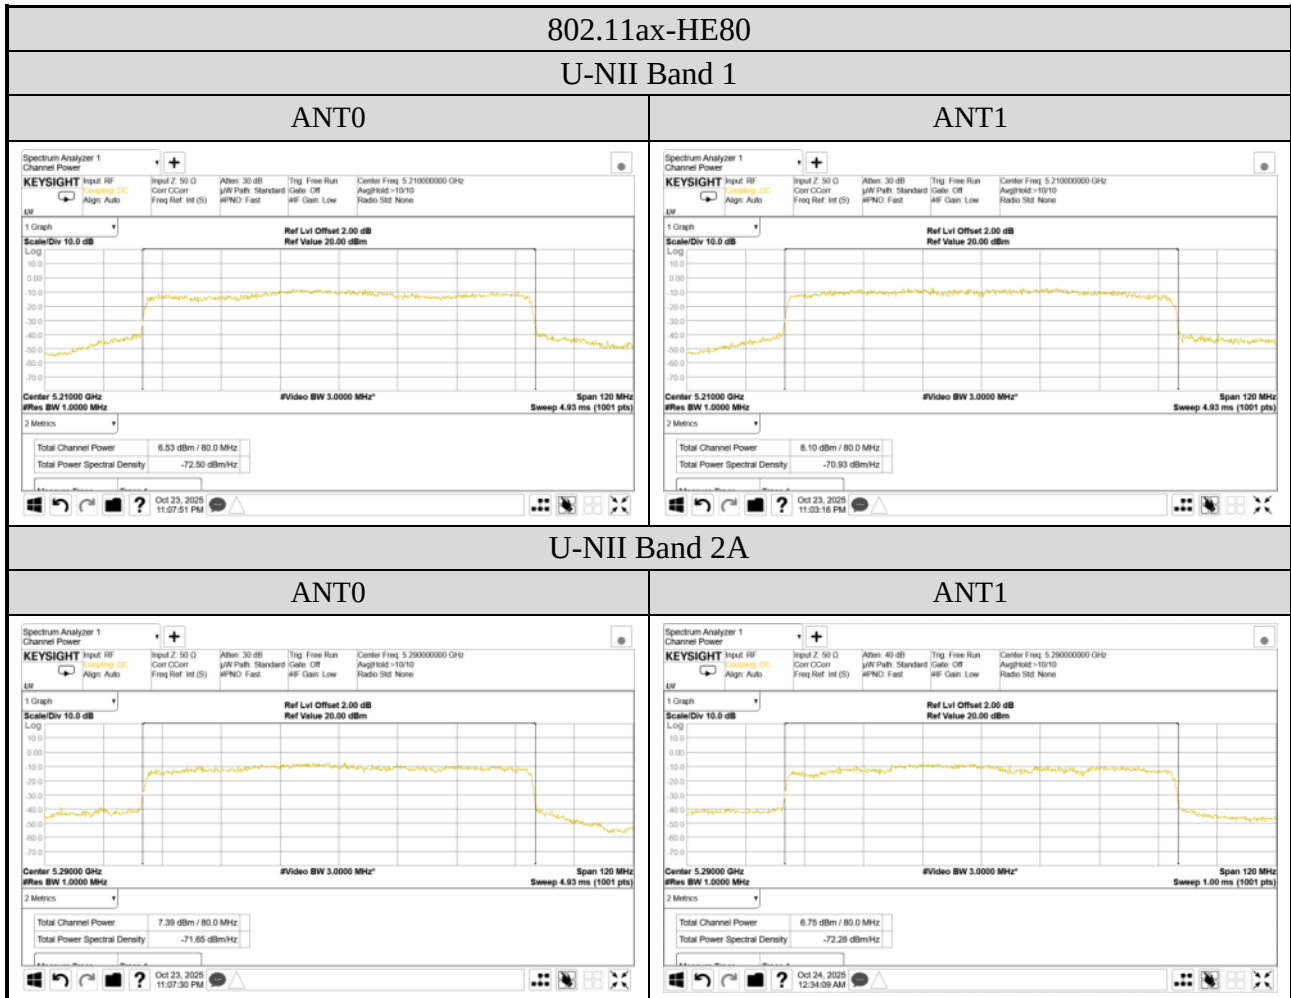


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

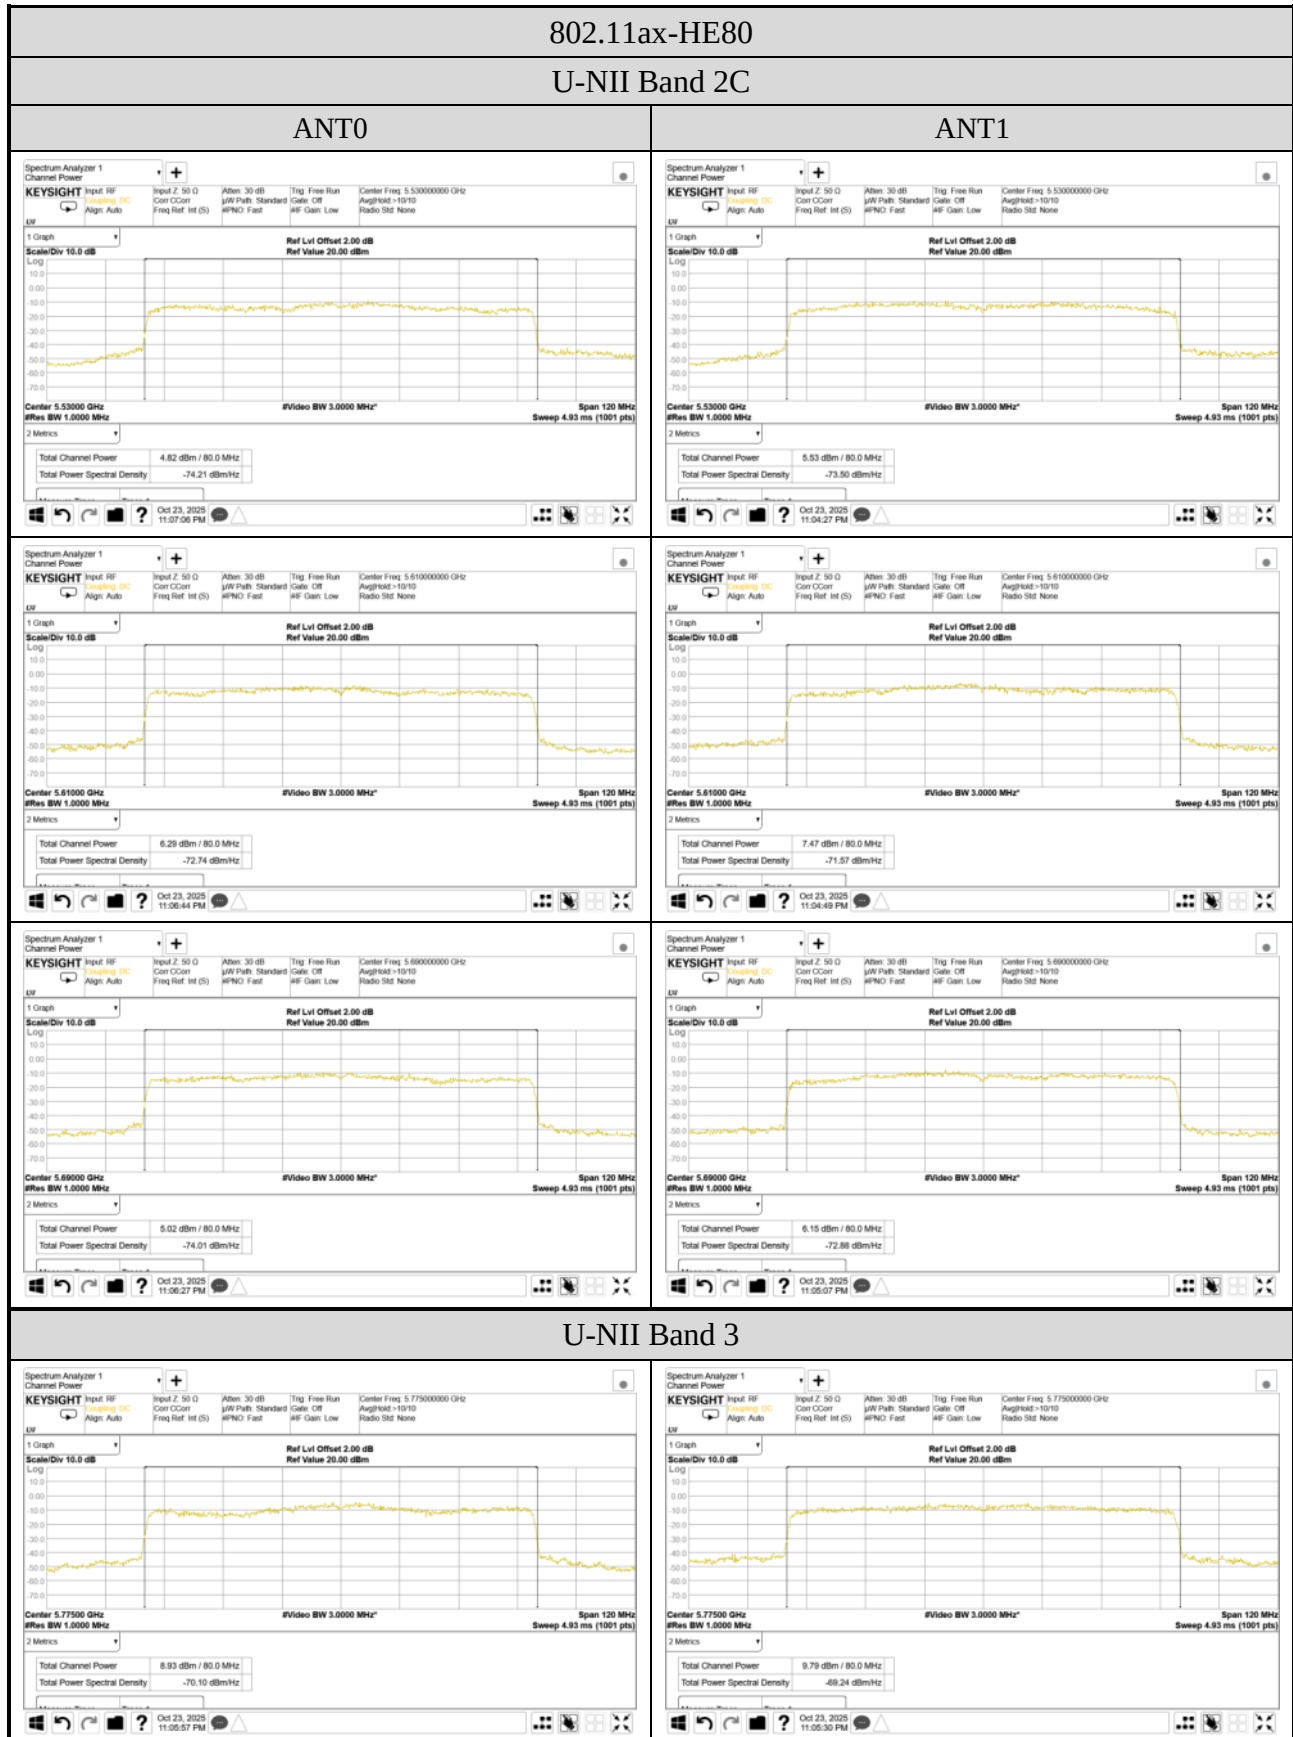

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

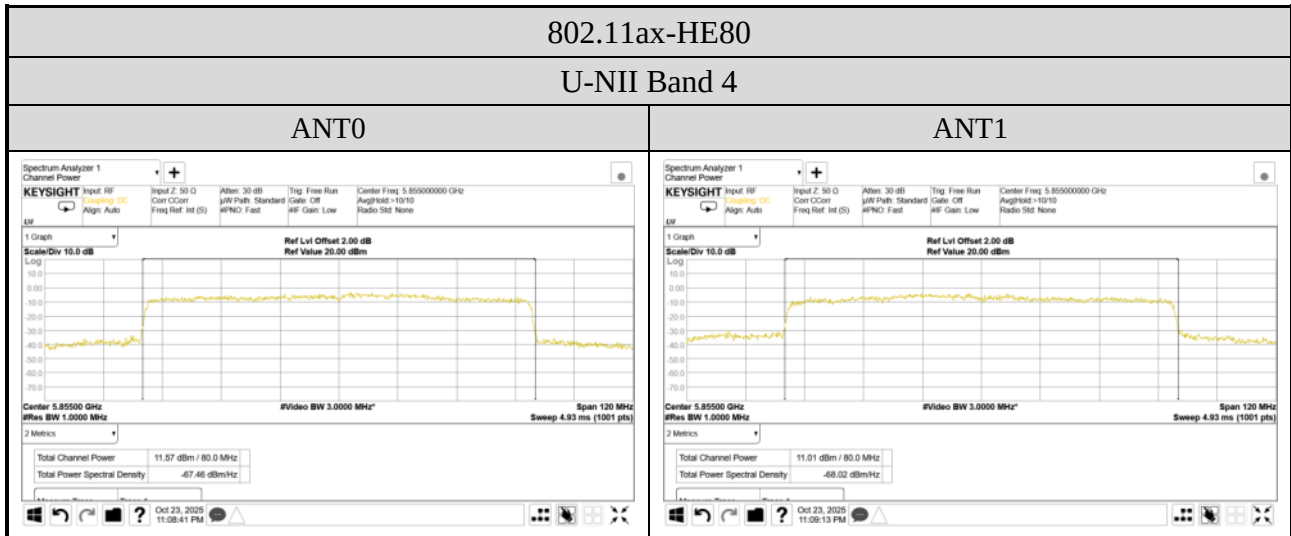

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

● Emission (26dB/99%) Bandwidth (U-NII Band 1~2C)

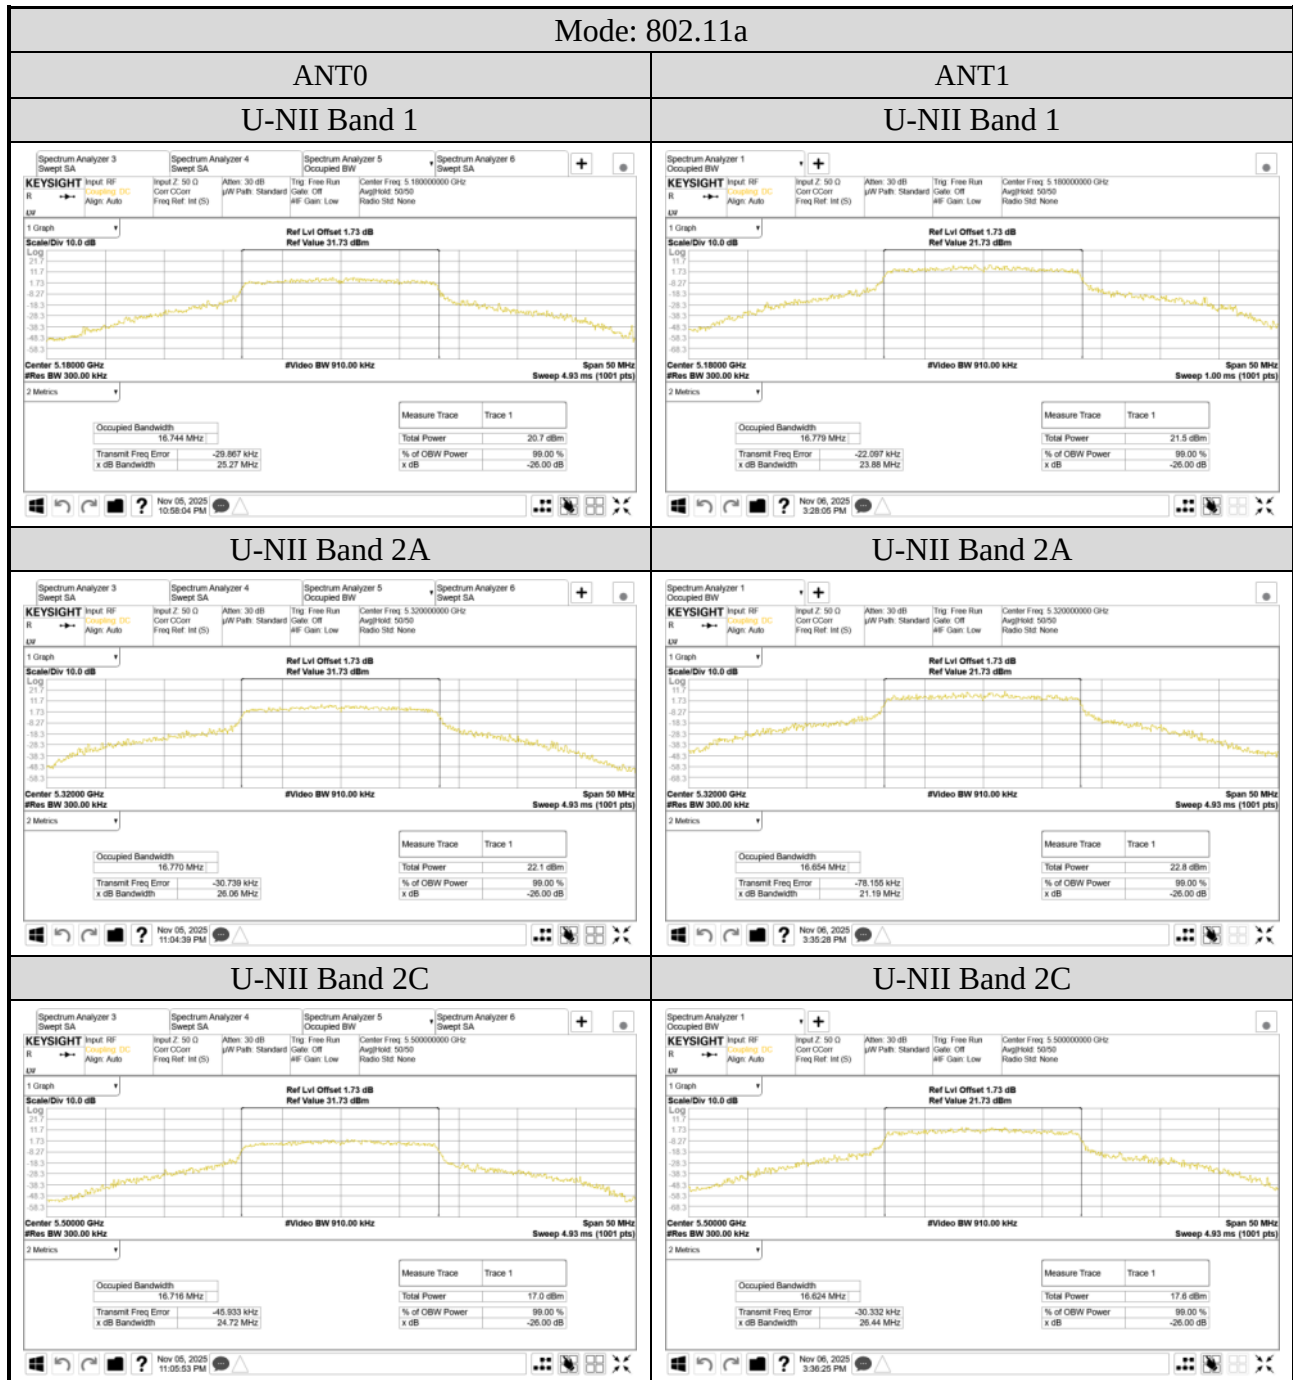

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

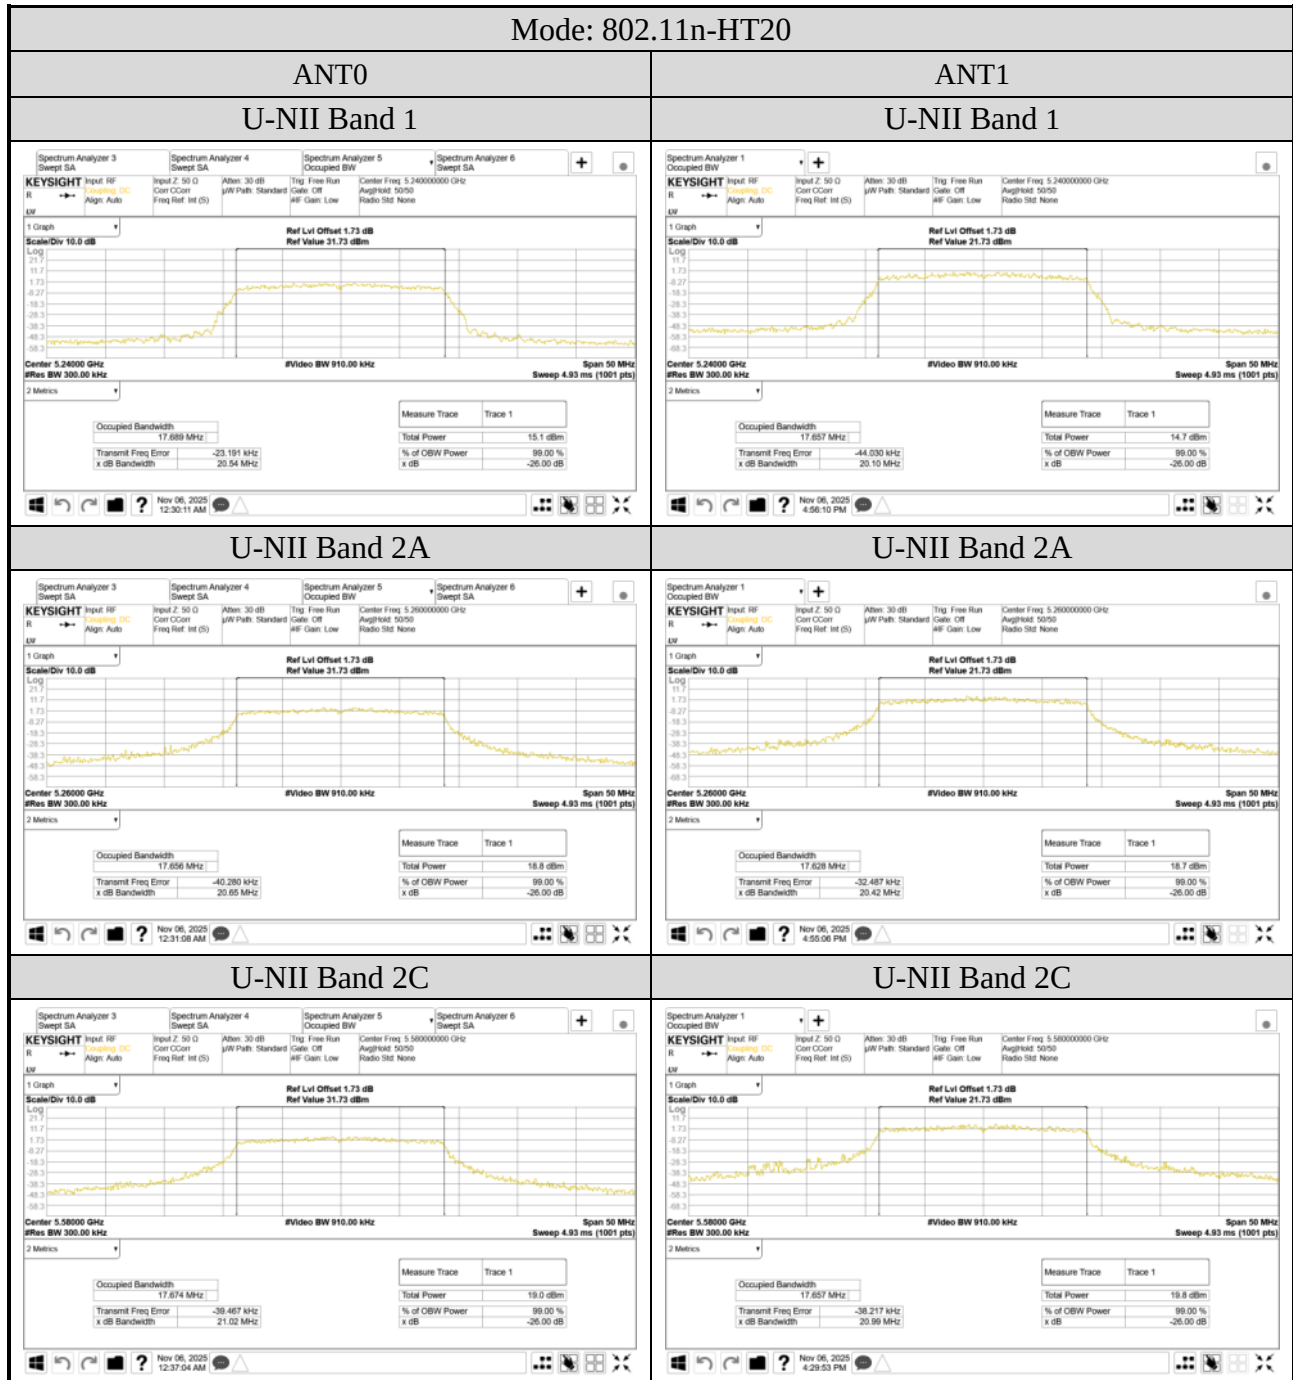


Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

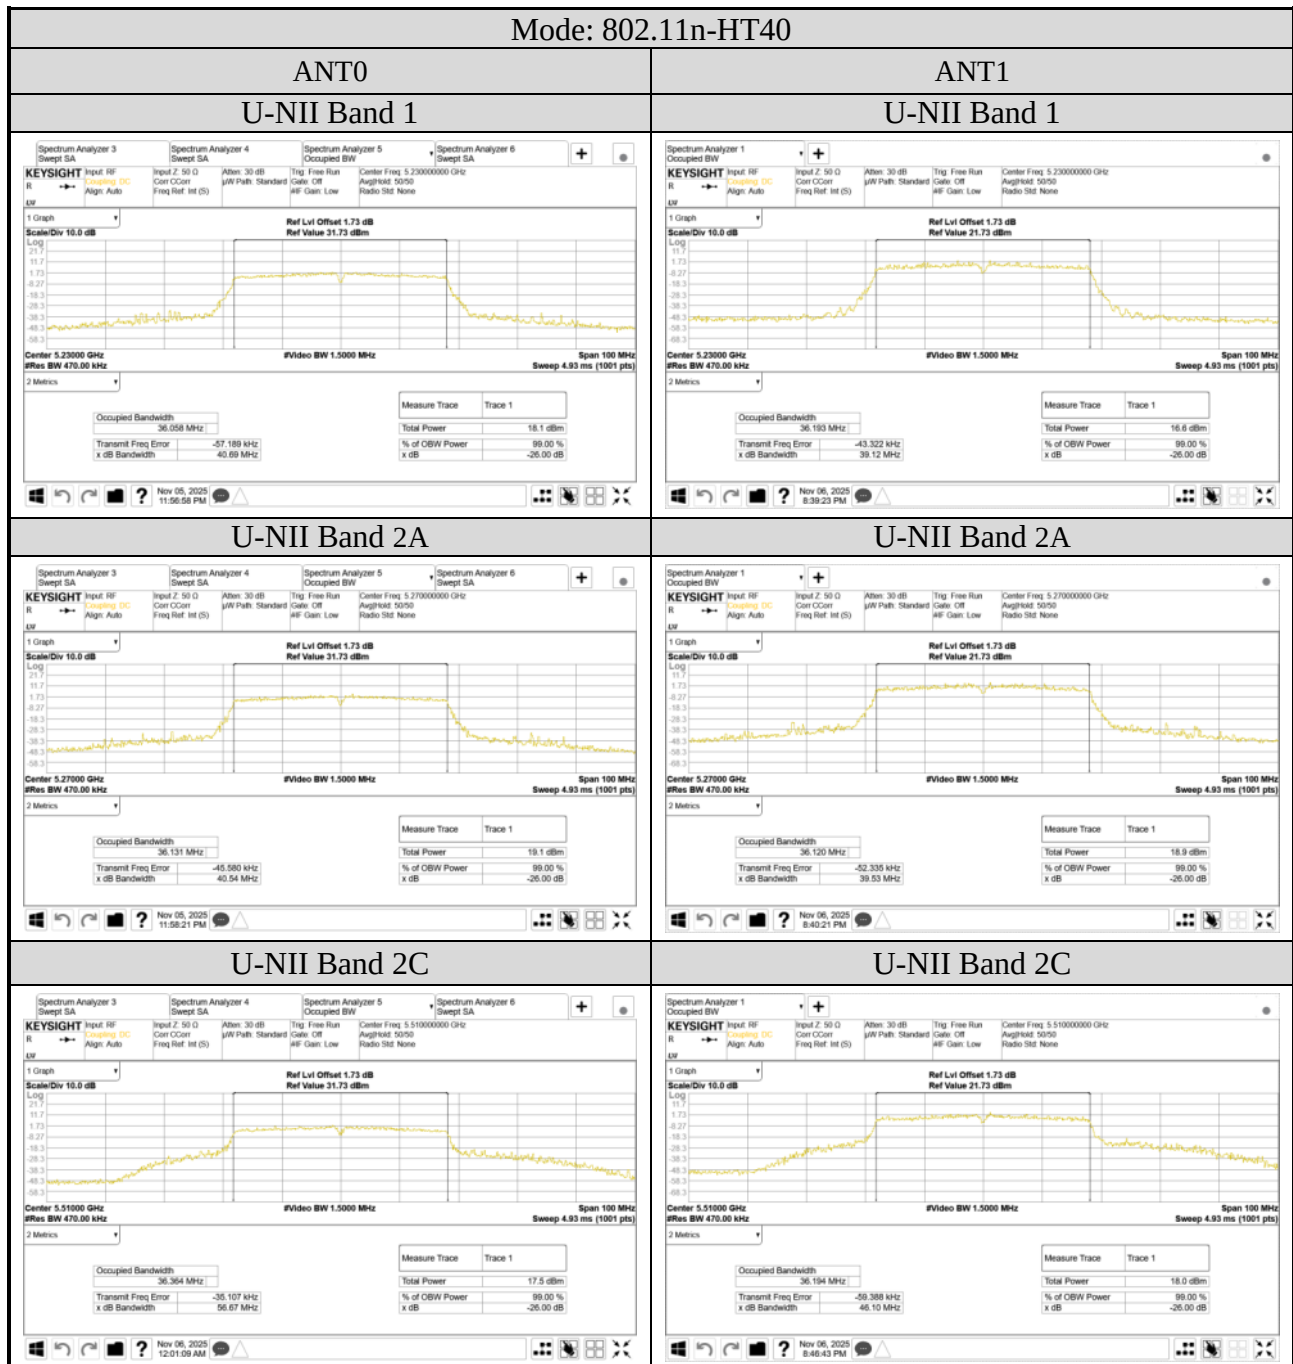

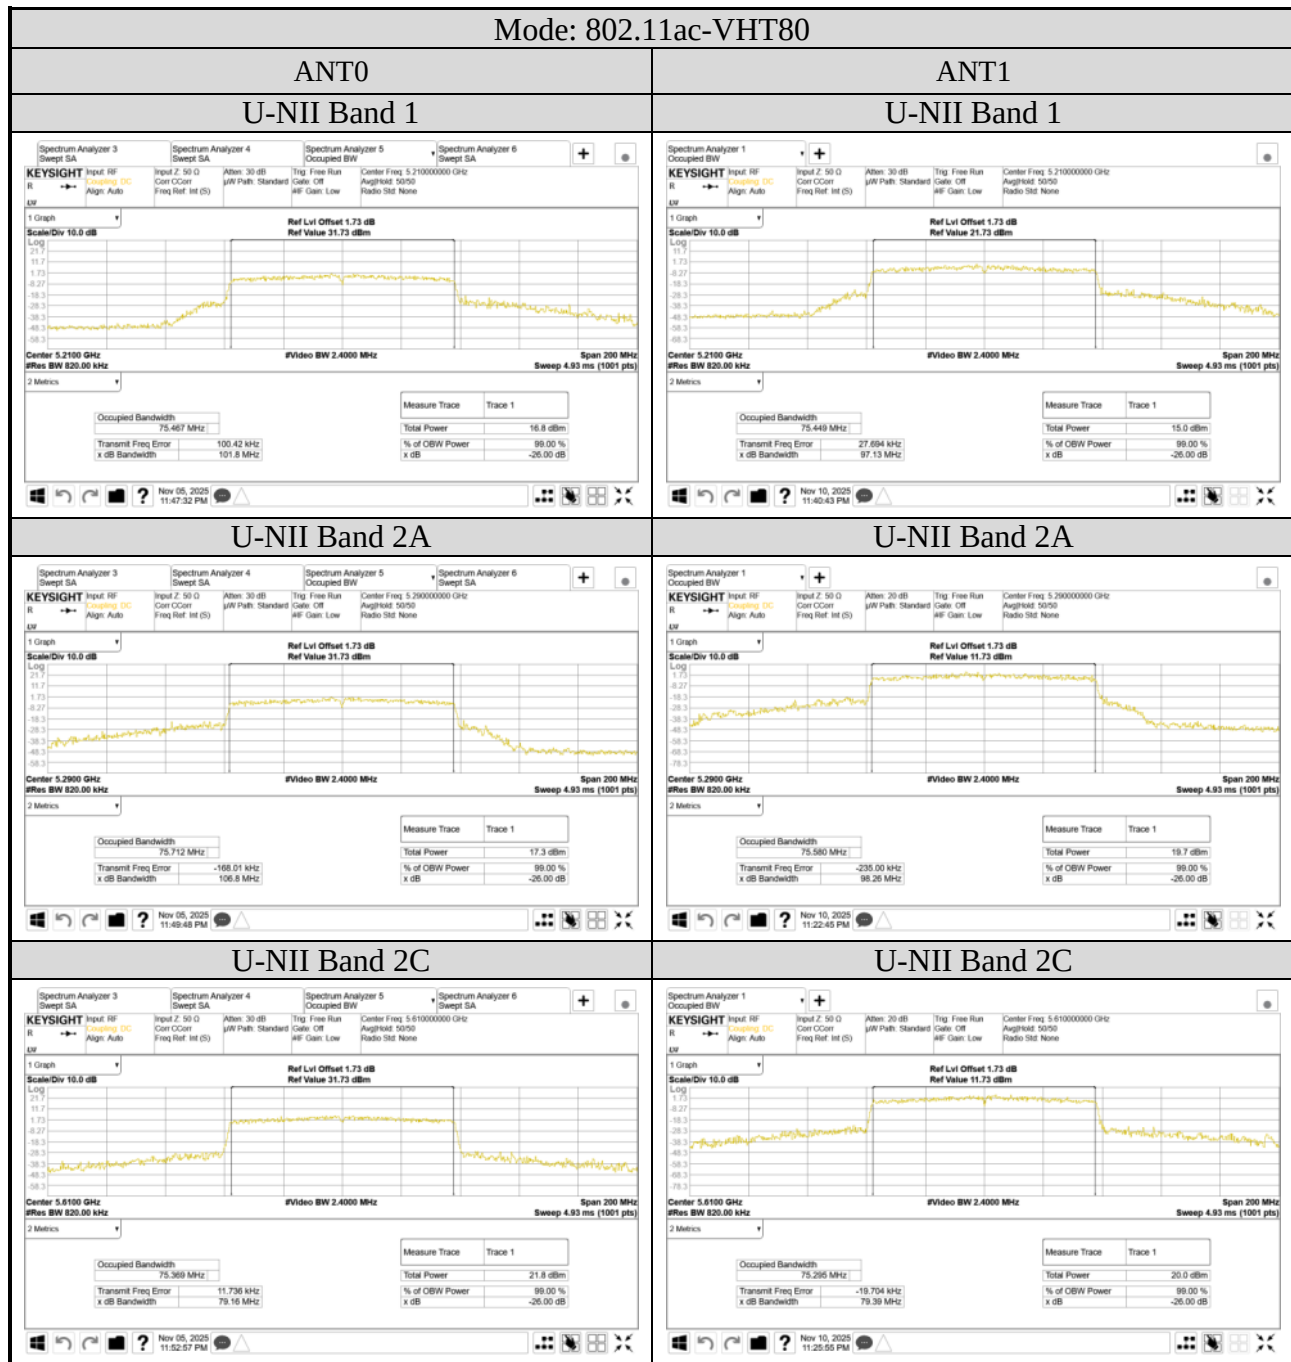

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

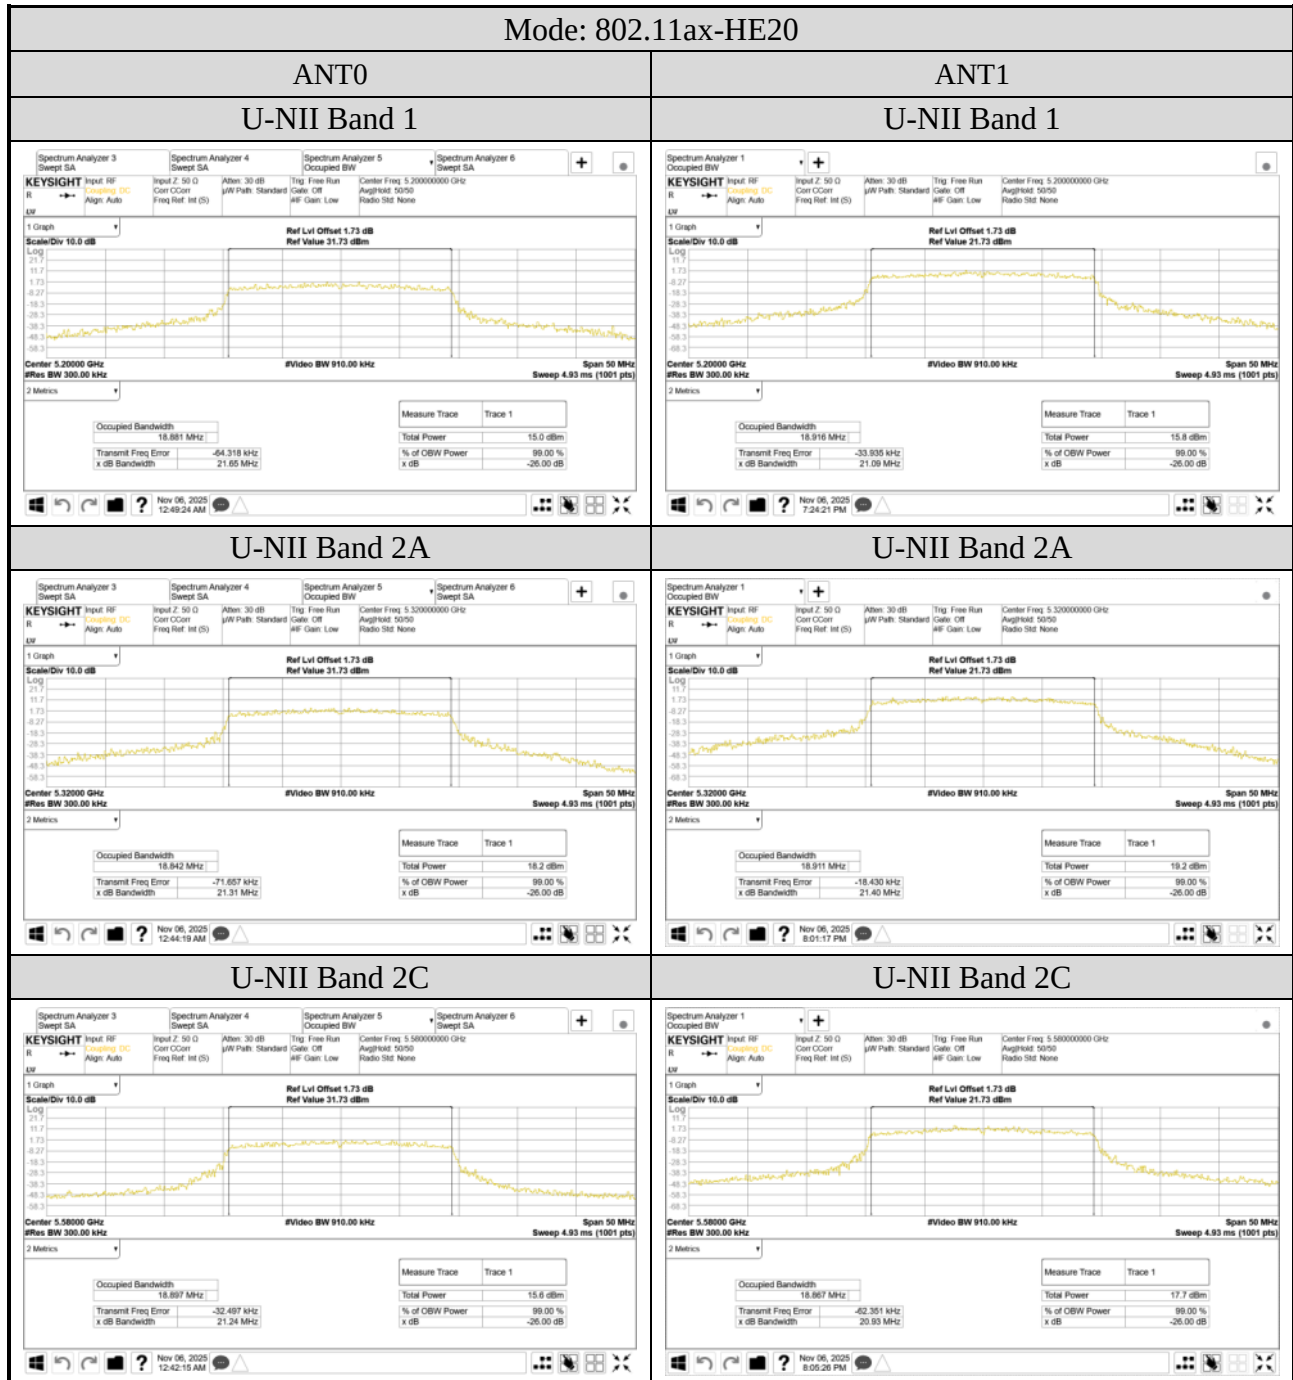


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

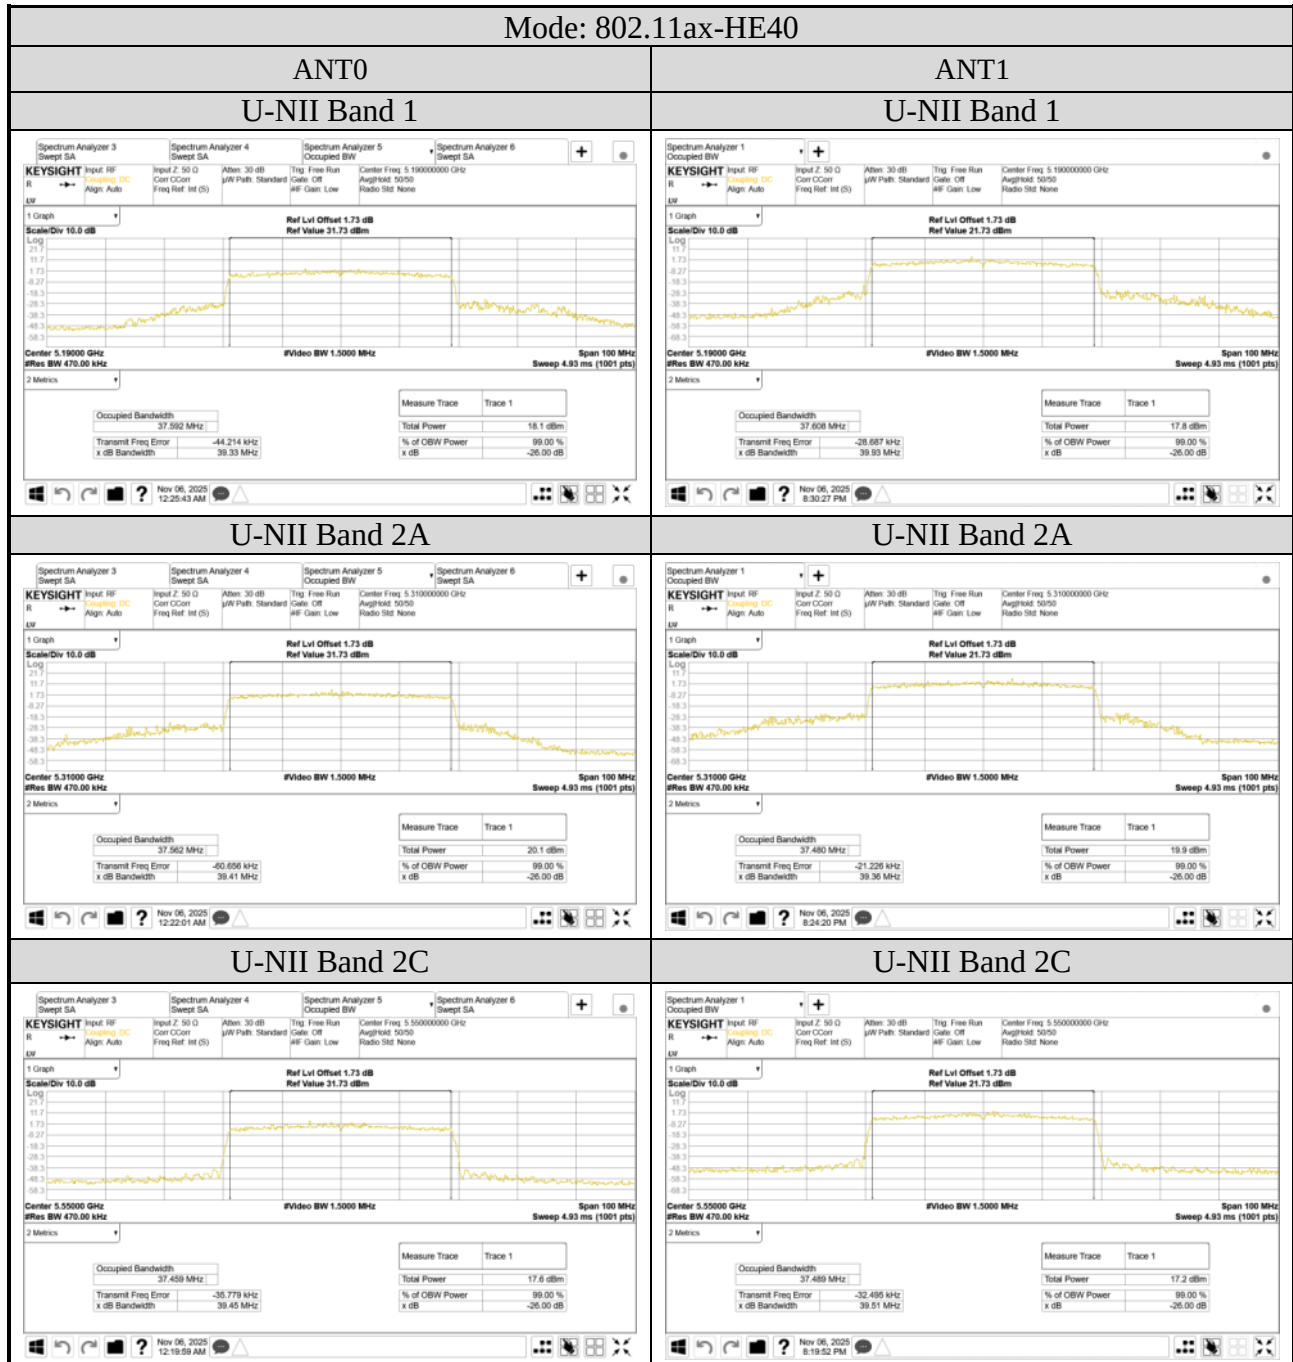

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

