

FCC PART 15C TEST REPORT FOR CERTIFICATION On Behalf of

FYTA GMBH

FYTA beam sensor

Model Number: FYTA02SPHERE

FCC ID: 2A5QK-FYTA02SPHERE

Applicant:	FYTA GMBH
Address:	Viktoria Luise Platz 7, 10777 Berlin, Germany
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R2510042
Date of Test:	Sep. 28, 2025~ Oct. 10, 2025
Date of Report:	Oct. 13, 2025

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Antenna Information	4
1.3. Information of RF Cable	4
2. SUMMARY OF TEST	5
2.1. Summary of test result	5
2.2. Test Facilities.....	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test	7
2.5. Block Diagram	7
2.6. Test Mode	8
2.7. Power Setting of Test Software	8
2.8. Channel List.....	9
2.9. Test Equipment List.....	10
3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	11
3.1. Limit.....	11
3.2. Test Setup.....	12
3.3. Spectrum Analyzer Setting.....	13
3.4. Test Procedure.....	14
3.5. Test Result.....	15
4. TEST SETUP PHOTO.....	27
5. EUT PHOTO	28

Applicant: FYTA GMBH
Address: Viktoria Luise Platz 7, 10777 Berlin, Germany

Manufacturer: Dongguan SCT Electronic Technology CO., Ltd.
Address: Building C, Dinghao Incubator Park, No. 33, Jinfu Road, Liaobu Town, Dongguan City, Guangdong Province, China.

E.U.T: FYTA beam sensor

Model Number: FYTA02SPHERE

Power Supply: DC 3V From Battery

Trade Name: ----- **Serial No.:** -----

Date of Receipt: Sep. 28, 2025 **Date of Test:** Sep. 28, 2025~ Oct. 10, 2025

Test Specification: FCC Part 15 Subpart C (15.247)
ANSIC63.10-2020
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

Test Result: The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.


Date: Nov. 20, 2025

Prepared by:

Reviewed by:

Approved by:


Ring Yang / Assistant


Seven Wang / Engineer


Iceman Hu / Manager

Other Aspects:

None.

Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested

This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.

1.GENERAL INFORMATION

1.1.Description of Device (EUT)

Product Name	:	FYTA beam sensor
Model Number	:	FYTA02SPHERE
Software Version	:	V01
Hardware Version	:	REV1.0.0
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	40
Modulation Type	:	GFSK
Sample Type	:	Prototype production

Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2.Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	LANLIN	SMD3216 2.4GHz 2dBi PF Ceramic Antenna	Ceramic Antenna	-	2.0

Note:

- 1.The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.
- 2.The test results of this report only apply to the sample as received

1.3.Information of RF Cable

Cable Loss(dB)	Provided by
1.0	FYTA GMBH

Note:

- 1.The customer declared the loss value of the RF Cable. and the test results of this report only apply to the sample as received.
- 2.The laboratory is not responsible for the accuracy of the cable loss.

2.SUMMARY OF TEST

2.1.Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	6dB Bandwidth	15.247(a)(2)	N/A
2	Maximum Peak Output Power	15.247(b)(3)	N/A
3	Power Spectral Density	15.247(e)	N/A
4	Conducted Band Edge	15.247(d)	N/A
5	Conducted Spurious Emissions	15.247(d)	N/A
6	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
7	AC Power Line Conducted Emissions	15.207	N/A
8	Antenna Requirement	15.203	N/A

Note:“N/A” denotes test is not applicable in this test report.

2.2.Test Facilities

EMC Lab : Accredited by CNAS, CHINA
Registration No.: L5288
This Accreditation is valid until: November 12, 2029

Recognized by FCC, USA
Designation Number: CN1215
This Recognition is valid until: January 31, 2026

Accredited by A2LA, USA
Registration No.: 4366.01
This Accreditation is valid until: January 31, 2026

Recognized by Industry Canada
CAB identifier No.: CN0035
This Recognition is valid until: January 31, 2026

Recognized by VCCI, Japan
Registration No.:C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Recognition is valid until: Apr. 19, 2026

Recognized by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Recognized by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3.Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (Below 30MHz)	$\pm 1.62\text{ dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4.Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

2.5.Block Diagram

For radiated emissions test: EUT was placed on a turntable, which is 0.8 (or 1.5) meters high above ground. The EUT was set into BT test mode by software prior to testing.

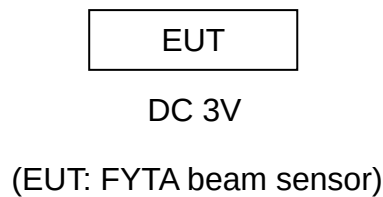

2.6.Test Mode

The test mode was selected for the final test as listed below.

Test Item	Modulation Type	Test Channel
Radiated Spurious Emissions (Below 1GHz)	GFSK	Low/Middle/High
Radiated Spurious Emissions (Above 1GHz)	GFSK	Low/Middle/High
Radiated Band Edge	GFSK	Low/High

Note:In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7.Power Setting of Test Software

Software Name	N/A		
Frequency(MHz)	2402	2440	2480
Setting	Default	Default	Default

Note: This information is provided by the applicant.

2.8.Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404
2	2406	3	2408
4	2410	5	2412
6	2414	7	2416
8	2418	9	2420
10	2422	11	2424
12	2426	13	2428
14	2430	15	2432
16	2434	17	2436
18	2438	19	2440
20	2442	21	2444
22	2446	23	2448
24	2450	25	2452
26	2454	27	2456
28	2458	29	2460
30	2462	31	2464
32	2466	33	2468
34	2470	35	2472
36	2474	37	2476
38	2478	39	2480

2.9. Test Equipment List

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	EST-E054	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA9120D	EST-E144	LISAI	June 11,25	June 10,26
Horn Antenna	Com-Power	AHA-840	EST-E133	LISAI	June 11,25	June 10,26
Low Noise Amplifier	RF	TRLA-010180 G45N	EST-E142	LISAI	June 11,25	June 10,26
Spectrum Analyzer	Rohde &Schwarz	FSV40	EST-E069	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

3.RADIATED SPURIOUS EMISSIONS AND BAND EDGE

3.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2.Test Setup


9kHz~30MHz

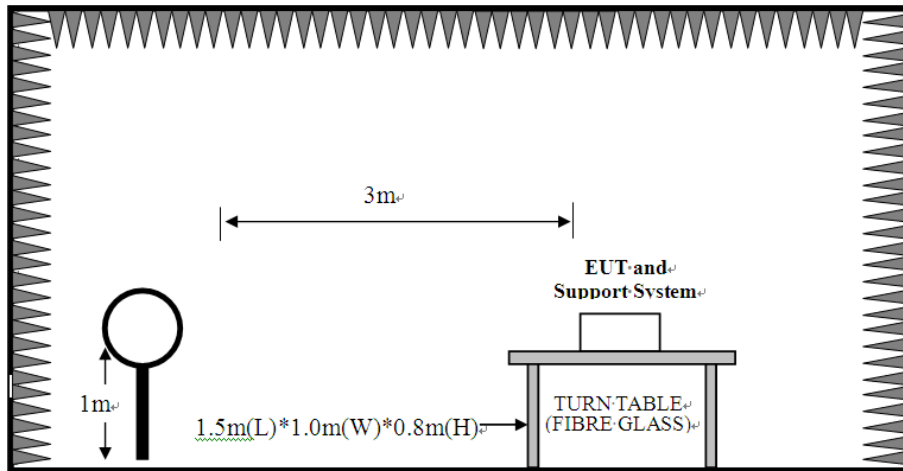

30~1000MHz

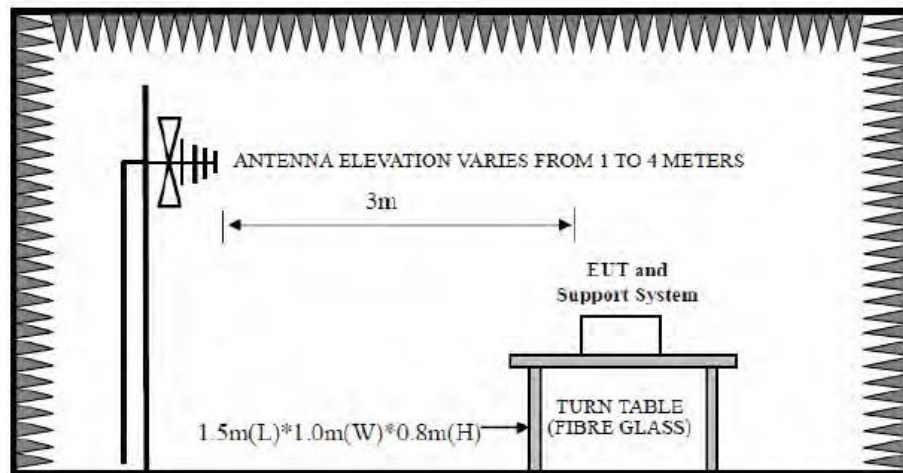

Above 1GHz

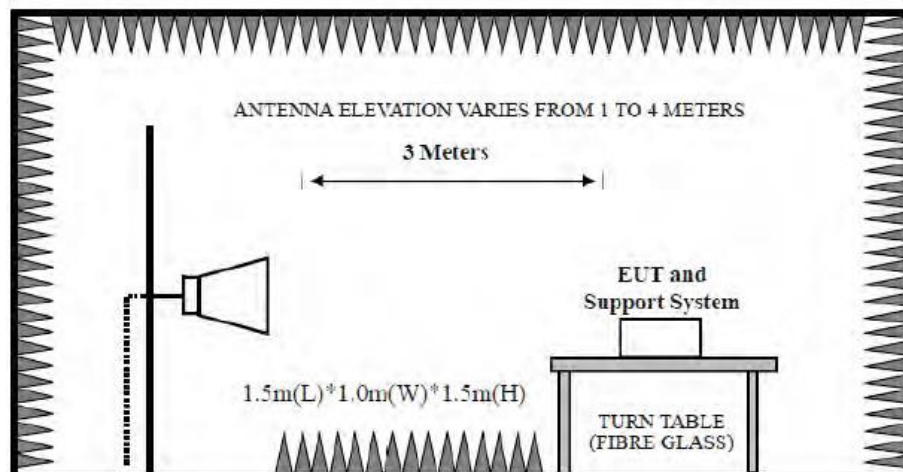

3.3.Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle≥98%,VBW=10Hz
		Duty cycle<98%,VBW≥1/T
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.

3.4.Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:

1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2440MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
3. BLE 1Mbps and BLE 2Mbps mode all have been tested, only worse case BLE GFSK 2Mbps 2402MHz mode is reported.

3.5.Test Result

Radiated Emissions Below 1GHz


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 17

File: \\EMC-966-5\Test Data2\2025\RF\WNUO Er\FYTA02 SPHERE.EM6 (20)

Date: 2025-10-09

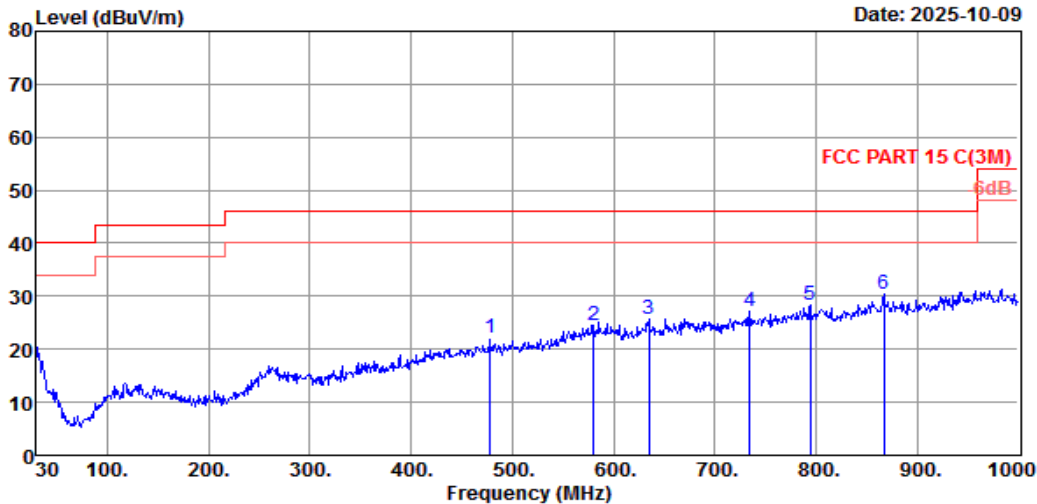

Site no. : 5# 966 Chamber Data no. : 17
Dis. / Ant. : 3m 54681 Ant. pol. : VERTICAL
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:21.2°C;Humi:32%;Press:101.1kPa
Engineer : Wind Li
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : TX Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	478.14	17.51	3.96	0.68	22.15	46.00	23.85	QP
2	579.99	19.50	4.40	0.67	24.57	46.00	21.43	QP
3	635.28	20.15	4.62	0.96	25.73	46.00	20.27	QP
4	734.22	21.02	5.00	1.06	27.08	46.00	18.92	QP
5	794.36	21.92	5.23	1.32	28.47	46.00	17.53	QP
6	867.11	22.73	5.48	2.21	30.42	46.00	15.58	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 18 File: \\EMC-966-5\Test Data2\2025\RF\Winnuo Er\FYTA02SPHERE.EM6 (20) Date: 2025-10-09

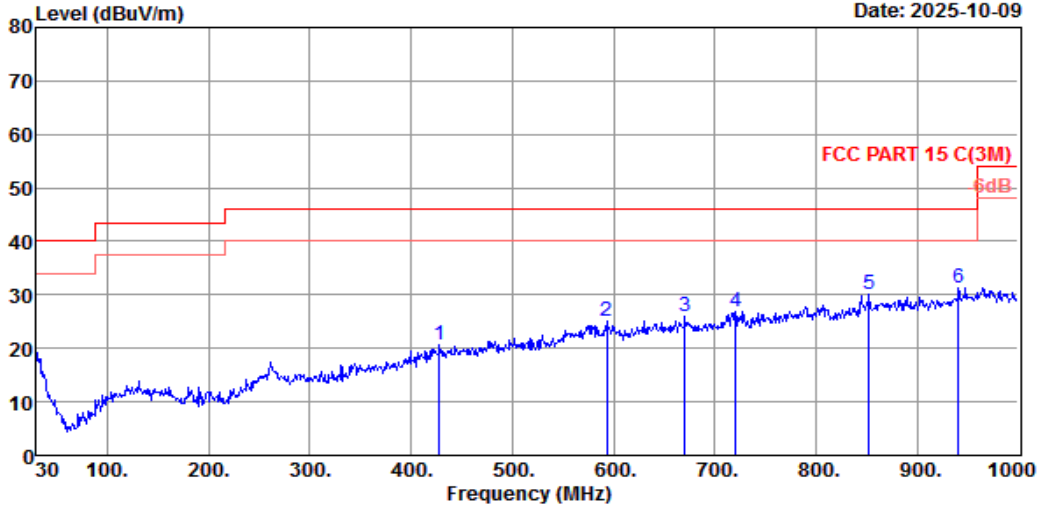

Site no. : 5# 966 Chamber Data no. : 18
Dis. / Ant. : 3m 54681 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:21.2°C;Humi:32%;Press:101.1kPa
Engineer : Wind Li
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	427.70	16.62	3.74	0.36	20.72	46.00	25.28	QP
2	593.57	19.39	4.45	1.24	25.08	46.00	20.92	QP
3	670.20	20.30	4.75	1.06	26.11	46.00	19.89	QP
4	720.64	20.90	4.95	0.91	26.76	46.00	19.24	QP
5	852.56	22.66	5.43	2.09	30.18	46.00	15.82	QP
6	940.83	23.93	5.73	1.75	31.41	46.00	14.59	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test,only the worst case was reported.

Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 11

File: \\EMC-966-5\Test Data2\2025\RF\Nuo Er\FYTA02SPHERE.EM6 (16)

Date: 2025-09-30

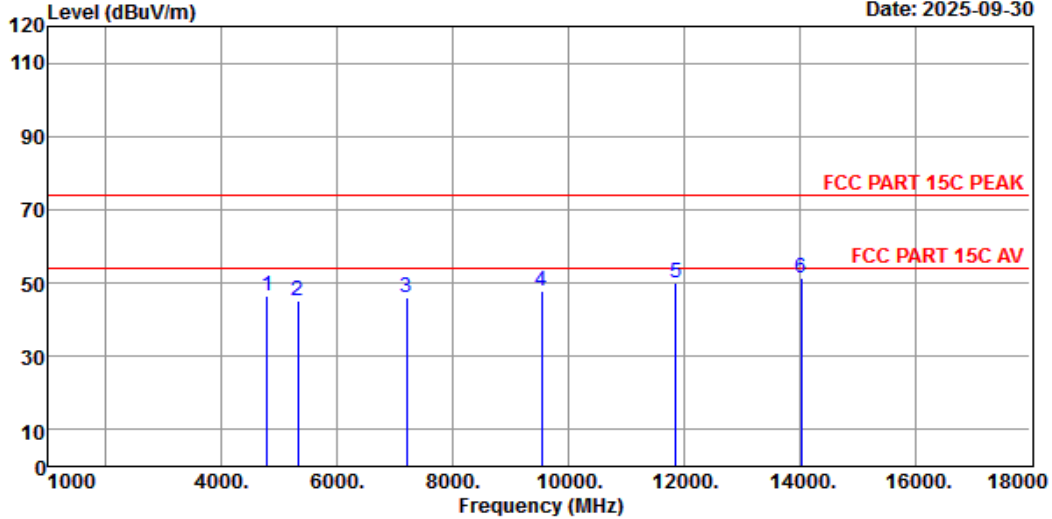

Site no. : 5# 966 Chamber Data no. : 11
 Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
 Engineer : Aron Zhang
 EUT : FYTA beam sensor
 Power : DC 3V From Battery
 M/N : FYTA02SPHERE
 Test Mode : GFSK 2Mbps TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4791.00	31.87	8.63	43.24	49.07	46.33	74.00	27.67	Peak
2	5318.00	33.03	8.94	43.26	46.31	45.02	74.00	28.98	Peak
3	7205.00	37.10	9.99	43.36	42.48	46.21	74.00	27.79	Peak
4	9534.00	39.30	11.16	42.84	40.34	47.96	74.00	26.04	Peak
5	11863.00	40.01	12.65	41.14	38.38	49.90	74.00	24.10	Peak
6	14039.00	42.01	13.66	39.98	35.58	51.27	74.00	22.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 12

File: \\EMC-966-5\Test Data2\2025\RF\Nuo Er\FYTA02 SPHERE.EM6 (16)

Date: 2025-09-30

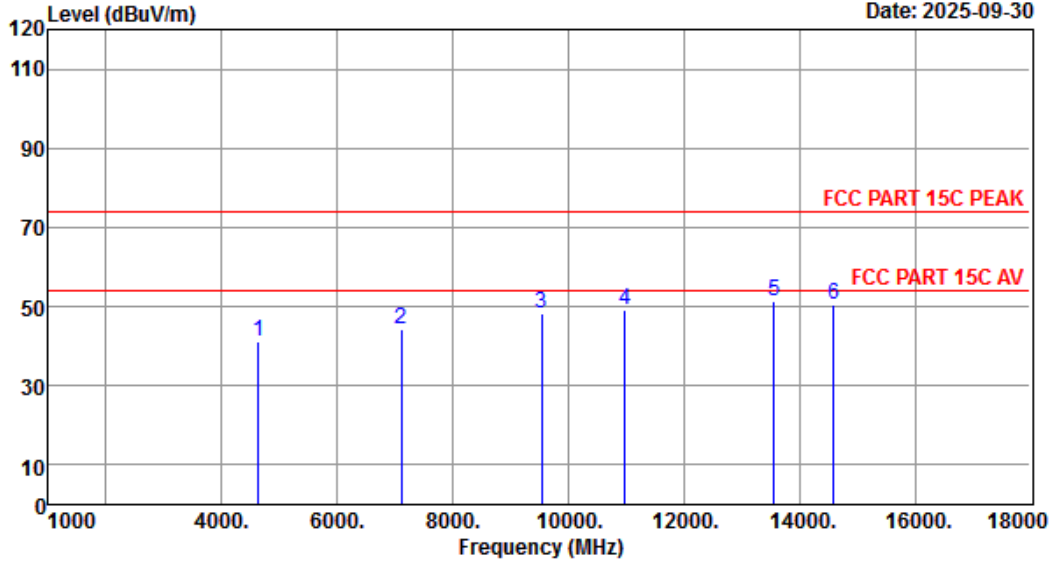

Site no. : 5# 966 Chamber Data no. : 12
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02 SPHERE
Test Mode : GFSK 2Mbps TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4638.00	31.87	8.54	43.27	44.19	41.33	74.00	32.67	Peak
2	7103.00	36.70	9.94	43.38	41.20	44.46	74.00	29.54	Peak
3	9534.00	39.30	11.16	42.84	40.43	48.05	74.00	25.95	Peak
4	10979.00	39.40	11.86	42.01	39.69	48.94	74.00	25.06	Peak
5	13563.00	41.31	13.46	39.72	36.48	51.53	74.00	22.47	Peak
6	14600.00	40.56	13.90	41.26	37.06	50.26	74.00	23.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 13

File: \\EMC-966-5\Test Data2\2025\RF\Nuo Er\FYTA02 SPHERE.EM6 (16)

Date: 2025-09-30

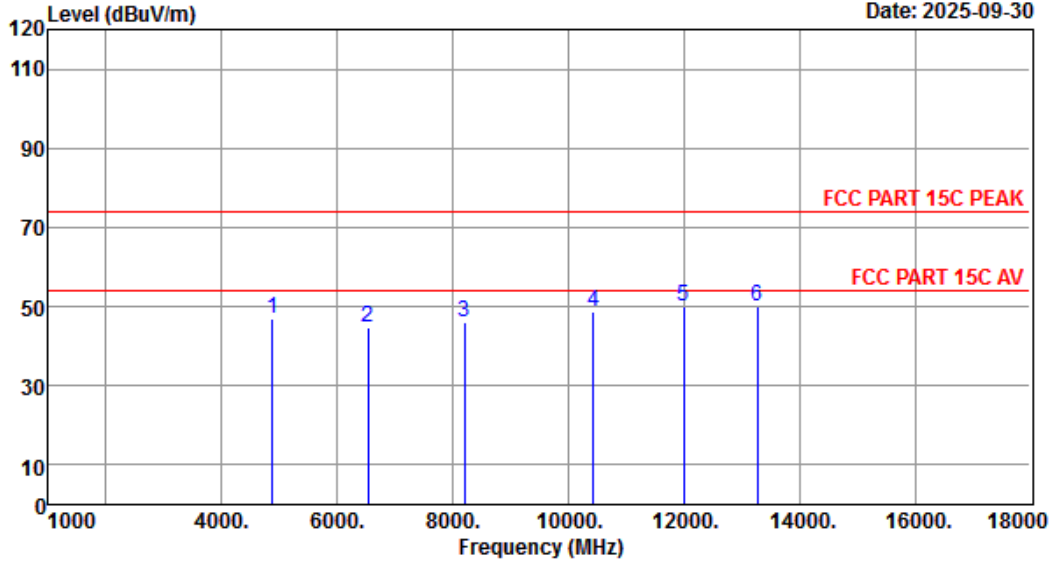


Site no. : 5# 966 Chamber Data no. : 13
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02 SPHERE
Test Mode : GFSK 2Mbps TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4876.00	31.80	8.69	43.22	49.71	46.98	74.00	27.02	Peak
2	6525.00	35.98	9.62	43.40	42.68	44.88	74.00	29.12	Peak
3	8208.00	37.60	10.50	43.16	40.92	45.86	74.00	28.14	Peak
4	10435.00	39.51	11.60	42.39	39.80	48.52	74.00	25.48	Peak
5	11999.00	40.10	12.77	41.00	38.05	49.92	74.00	24.08	Peak
6	13274.00	40.79	13.33	39.61	35.51	50.02	74.00	23.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

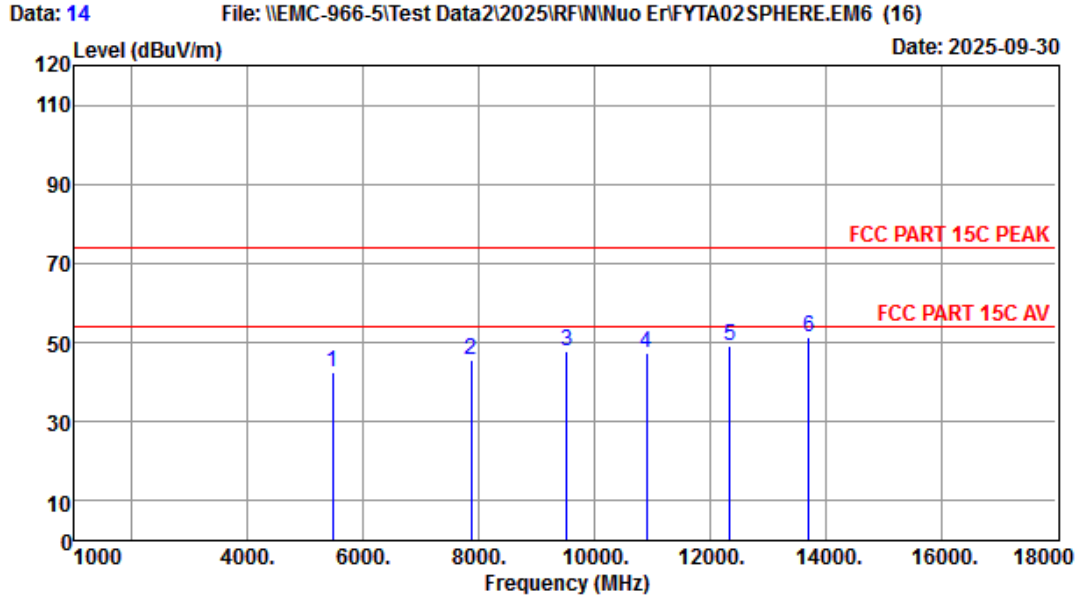

Site no. : 5# 966 Chamber Data no. : 14
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02 SPHERE
Test Mode : GFSK 2Mbps TX 2440MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5471.00	33.37	9.03	43.29	43.20	42.31	74.00	31.69	Peak
2	7868.00	37.20	10.33	43.23	41.25	45.55	74.00	28.45	Peak
3	9517.00	39.25	11.16	42.84	40.06	47.63	74.00	26.37	Peak
4	10911.00	39.42	11.83	42.06	38.27	47.46	74.00	26.54	Peak
5	12339.00	40.17	12.92	40.49	36.49	49.09	74.00	24.91	Peak
6	13716.00	41.58	13.52	39.78	35.94	51.26	74.00	22.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 15 File: \\EMC-966-5\Test Data2\2025\RF\Nuo Er\FYTA02SPHERE.EM6 (16) Date: 2025-09-30

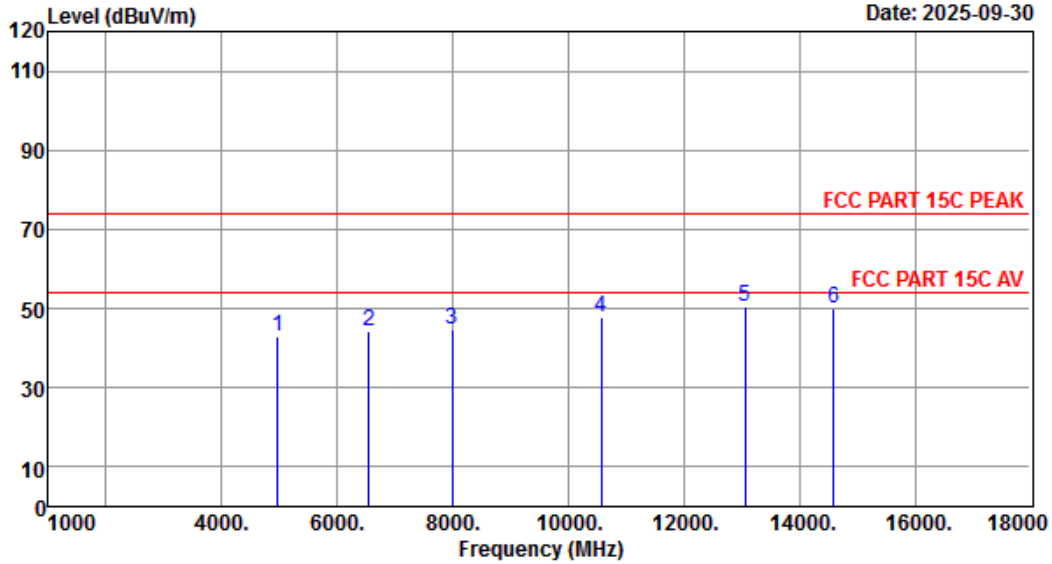


Site no. : 5# 966 Chamber Data no. : 15
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : GFSK 2Mbps TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4961.00	31.73	8.74	43.21	45.50	42.76	74.00	31.24	Peak
2	6542.00	35.86	9.63	43.40	42.39	44.48	74.00	29.52	Peak
3	7987.00	38.08	10.39	43.20	39.59	44.86	74.00	29.14	Peak
4	10571.00	39.48	11.66	42.30	38.96	47.80	74.00	26.20	Peak
5	13053.00	40.39	13.23	39.52	36.52	50.62	74.00	23.38	Peak
6	14600.00	40.56	13.90	41.26	36.77	49.97	74.00	24.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

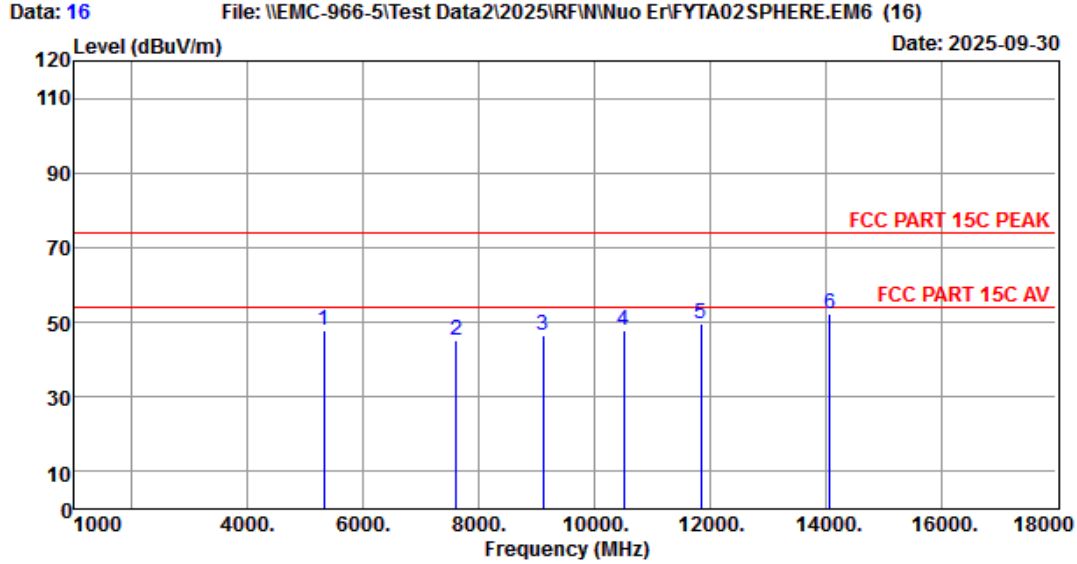

Site no. : 5# 966 Chamber Data no. : 16
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : GFSK 2Mbps TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.00	33.03	8.94	43.26	49.24	47.95	74.00	26.05	Peak
2	7613.00	36.47	10.20	43.28	41.97	45.36	74.00	28.64	Peak
3	9109.00	38.58	10.96	42.97	40.02	46.59	74.00	27.41	Peak
4	10503.00	39.50	11.63	42.34	38.95	47.74	74.00	26.26	Peak
5	11846.00	39.99	12.63	41.15	38.32	49.79	74.00	24.21	Peak
6	14073.00	41.92	13.68	40.06	36.58	52.12	74.00	21.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note: The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

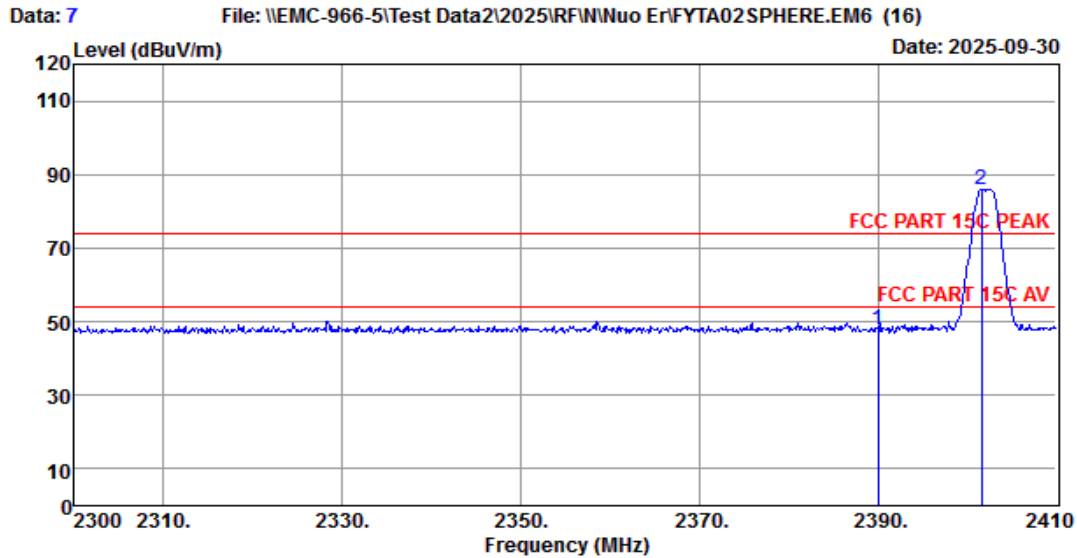


Site no. : 5# 966 Chamber Data no. : 7
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : GFSK 2Mbps TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.60	6.65	44.13	57.64	47.76	74.00	26.24	Peak
2	2401.64	27.60	6.65	44.13	95.93	86.05	74.00	-12.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

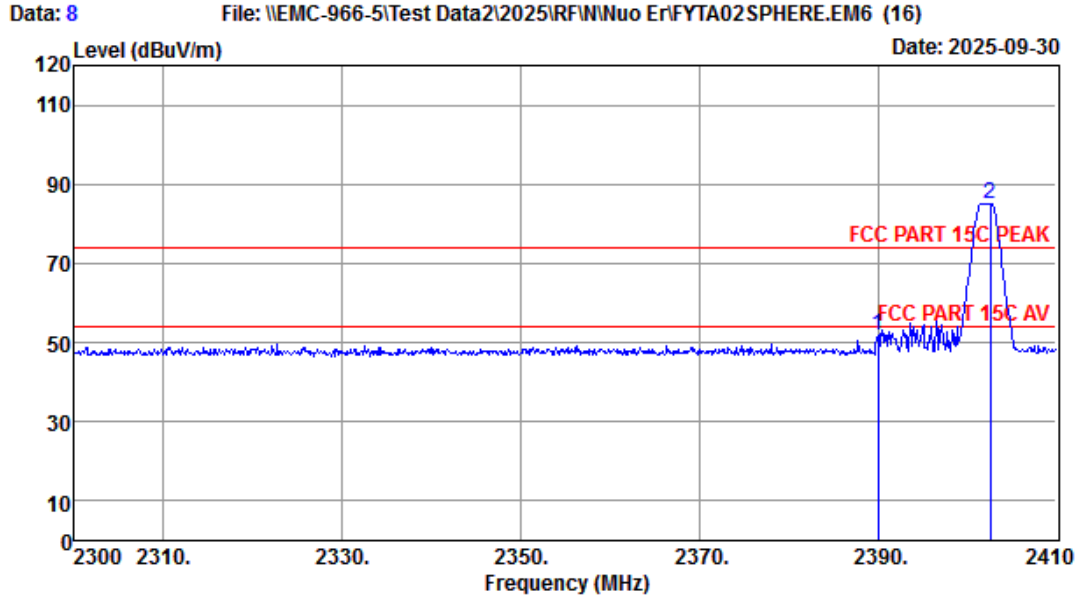


Site no. : 5# 966 Chamber Data no. : 8
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02 SPHERE
Test Mode : GFSK 2Mbps TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.60	6.65	44.13	61.78	51.90	74.00	22.10	Peak
2	2402.63	27.67	6.68	44.11	94.97	85.21	74.00	-11.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

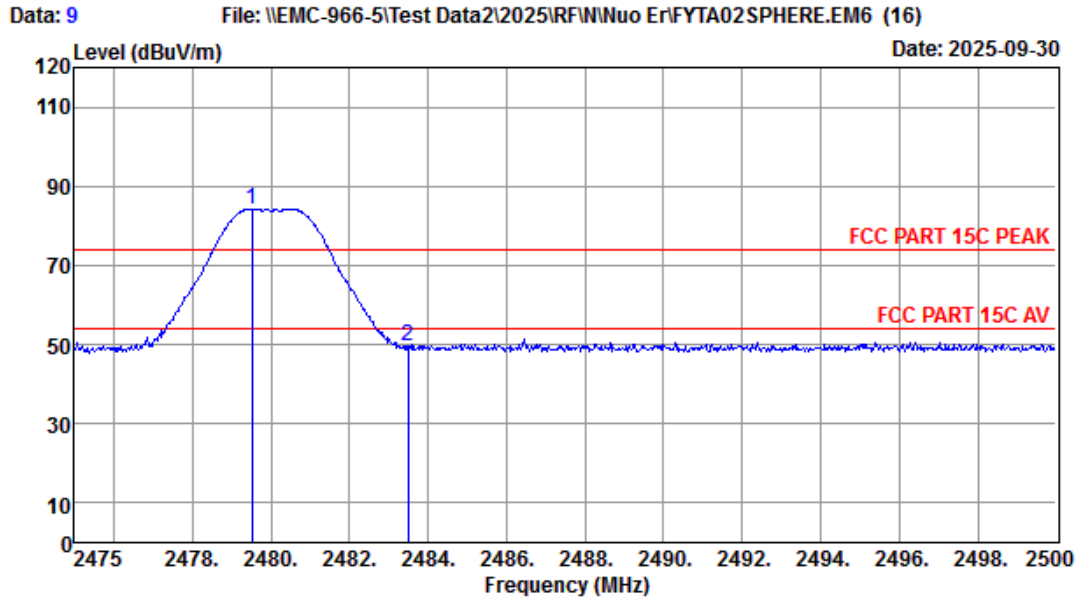

Site no. : 5# 966 Chamber Data no. : 9
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02 SPHERE
Test Mode : GFSK 2Mbps TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.53	27.93	6.77	44.03	93.67	84.34	74.00	-10.34	Peak
2	2483.50	27.93	6.77	44.03	58.78	49.45	74.00	24.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 10

File: \\EMC-966-5\Test Data2\2025\RF\Nuo Er\FYTA02SPHERE.EM6 (16)

Date: 2025-09-30

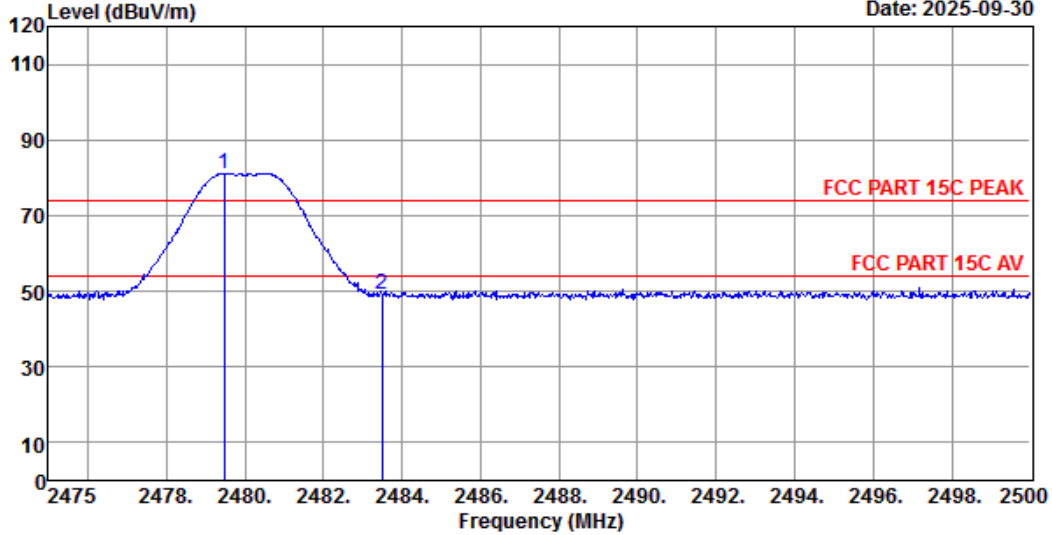

Site no. : 5# 966 Chamber Data no. : 10
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : FYTA beam sensor
Power : DC 3V From Battery
M/N : FYTA02SPHERE
Test Mode : GFSK 2Mbps TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.48	27.93	6.77	44.03	90.53	81.20	74.00	-7.20	Peak
2	2483.50	27.93	6.77	44.03	58.33	49.00	74.00	25.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note: All channels had been pre-test,only of the worst case channels were reported.

4. TEST SETUP PHOTO

Radiated Test (Below 1GHz)





Radiated Test (Above 1GHz)



5. EUT PHOTO

External Photos
M/N: FYTA02SPHERE

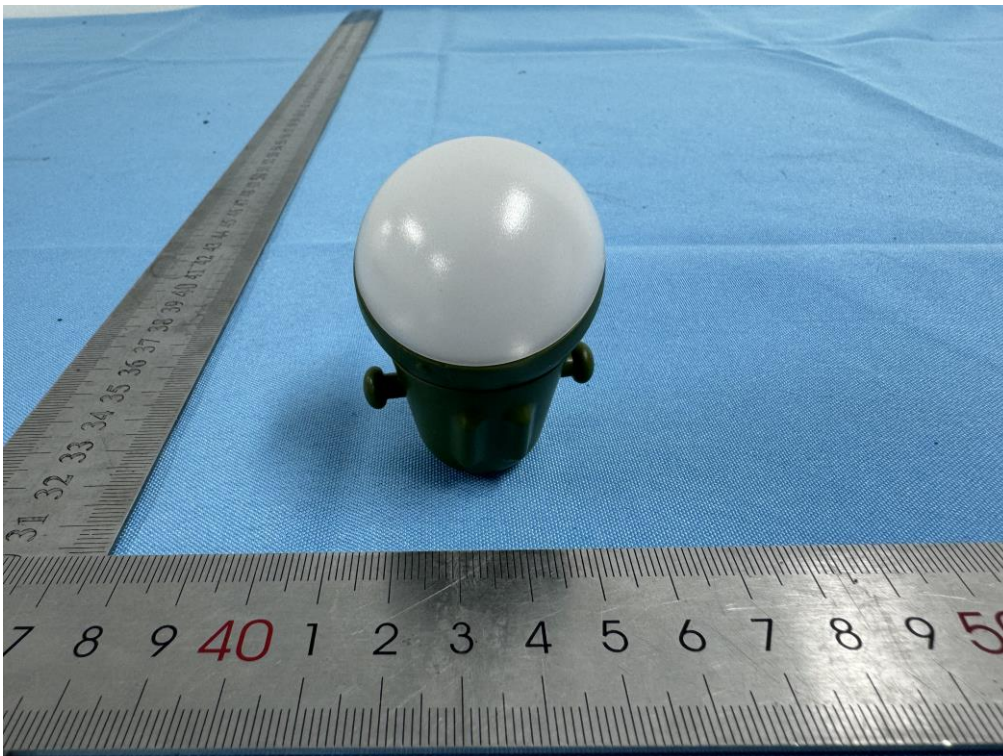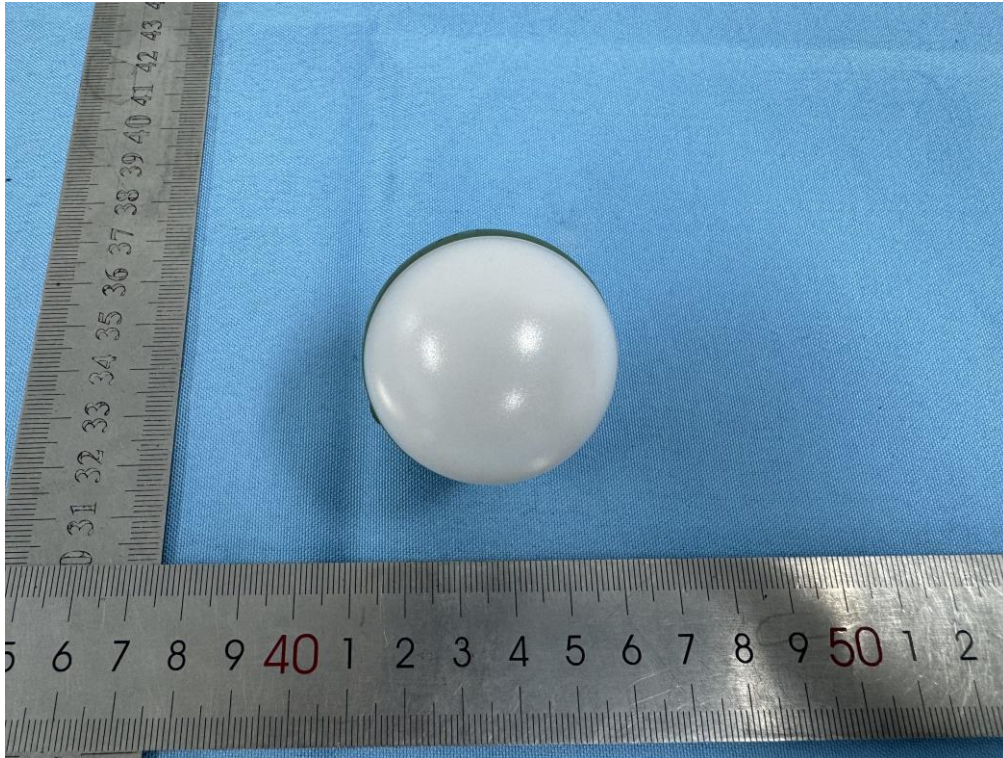

External Photos
M/N: FYTA02SPHERE



External Photos
M/N: FYTA02SPHERE





External Photos
M/N: FYTA02SPHERE





External Photos
M/N: FYTA02SPHERE




External Photos
M/N: FYTA02SPHERE

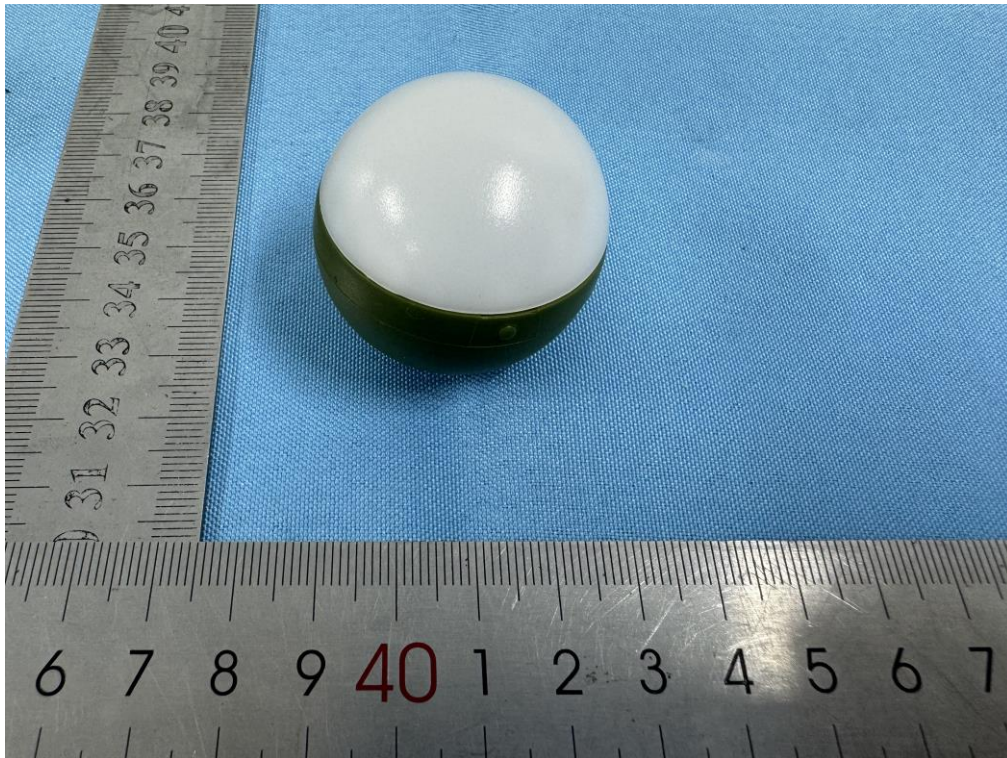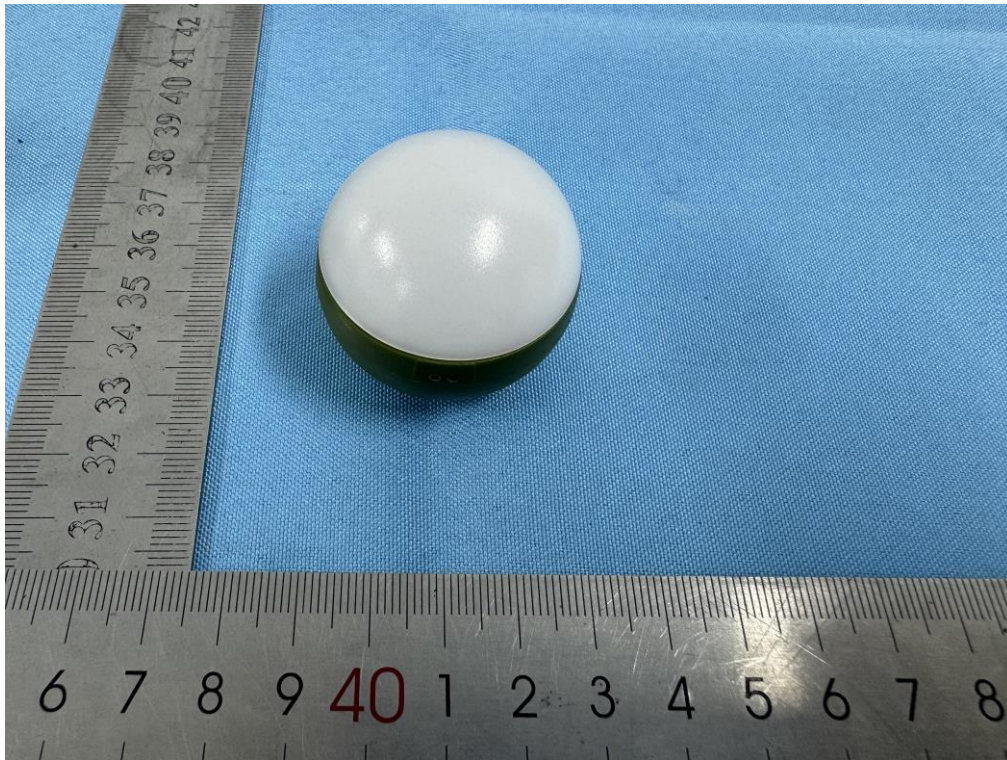



External Photos
M/N: FYTA02SPHERE

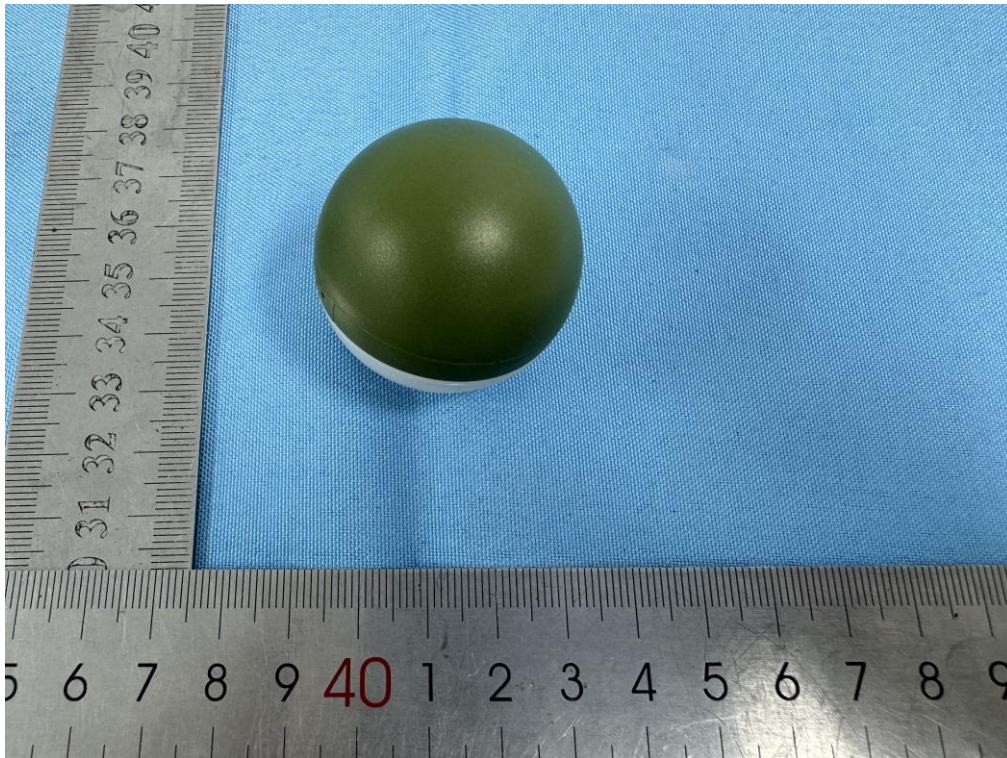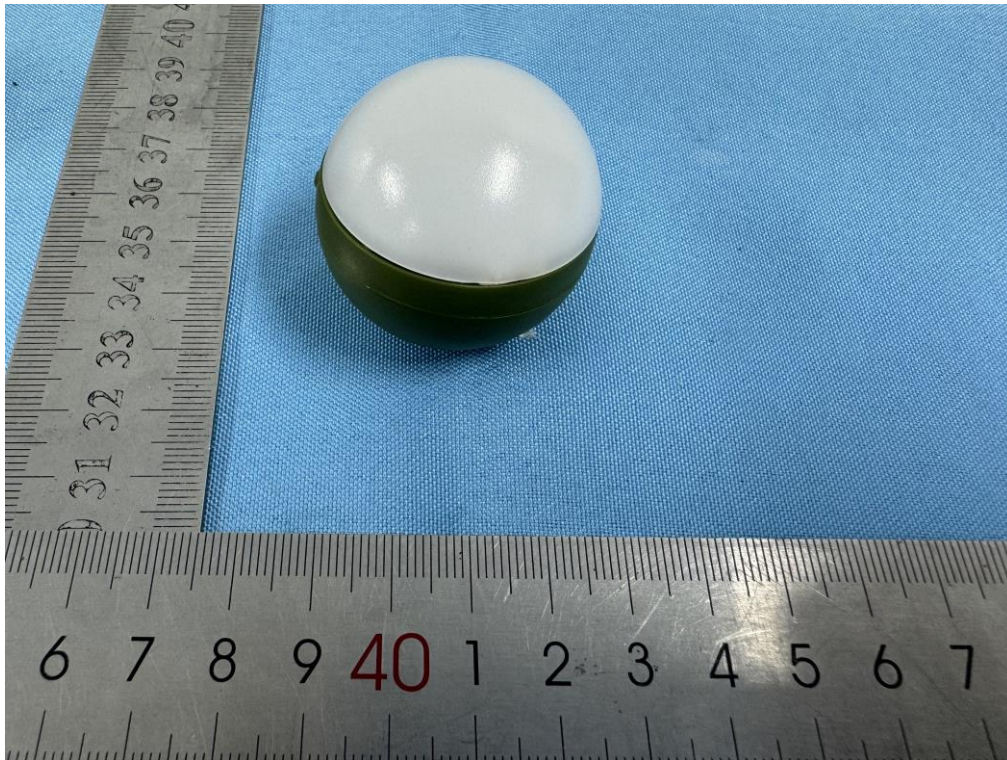

Internal Photos M/N: FYTA02SPHERE


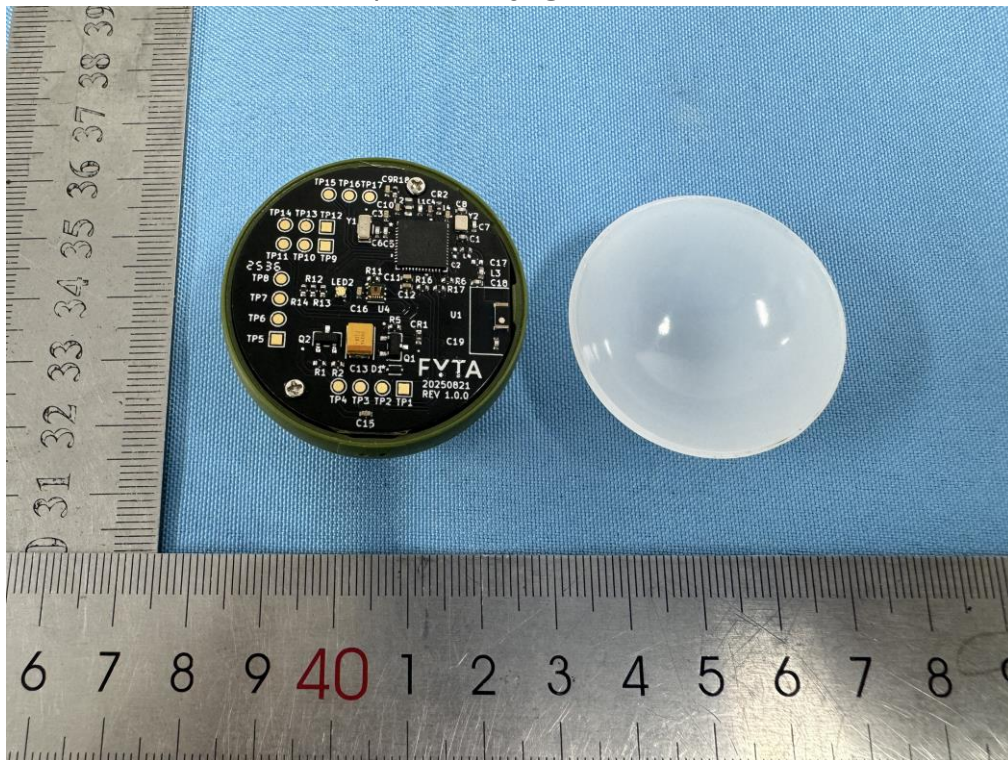


Internal Photos
M/N: FYTA02SPHERE

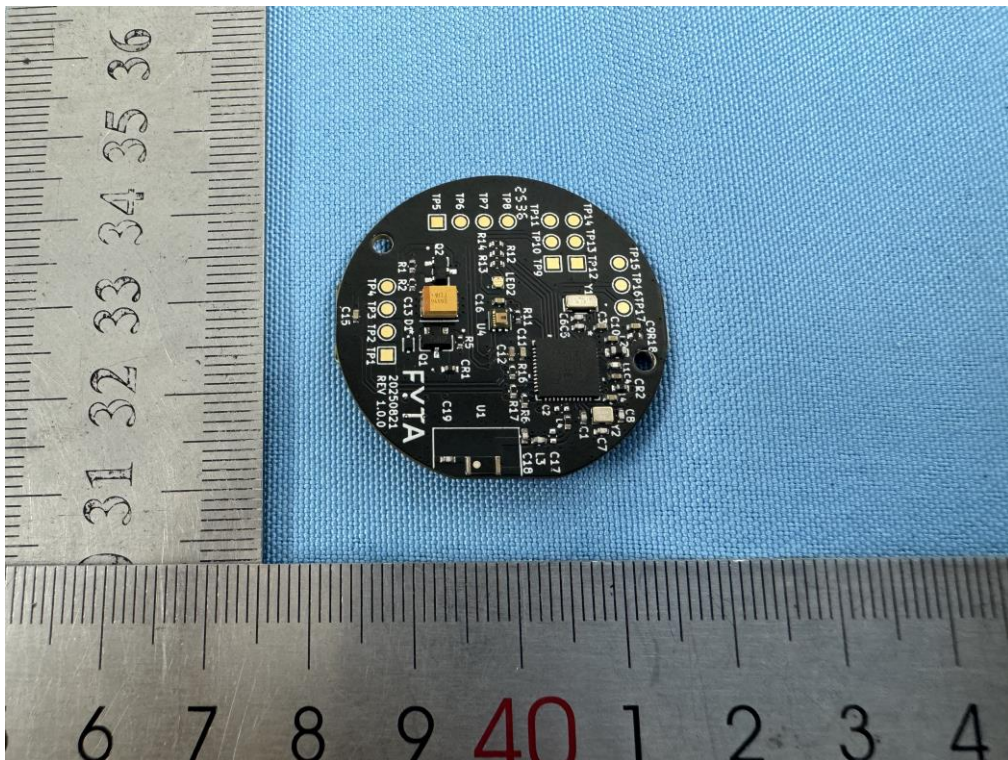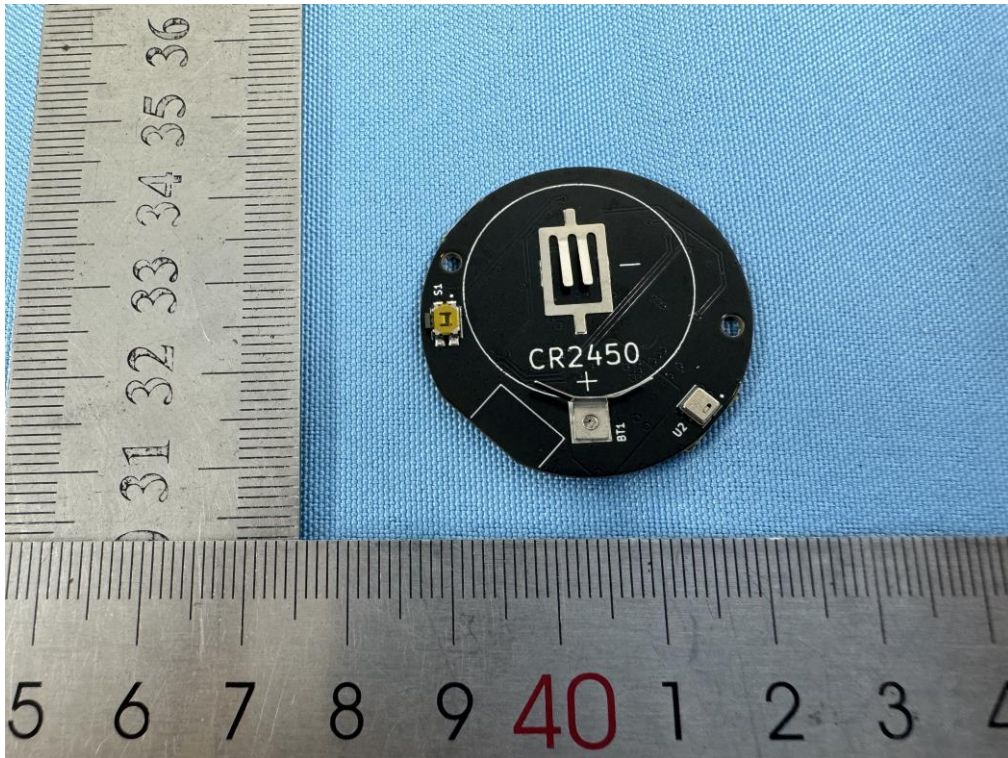

Internal Photos

M/N: FYTA02SPHERE

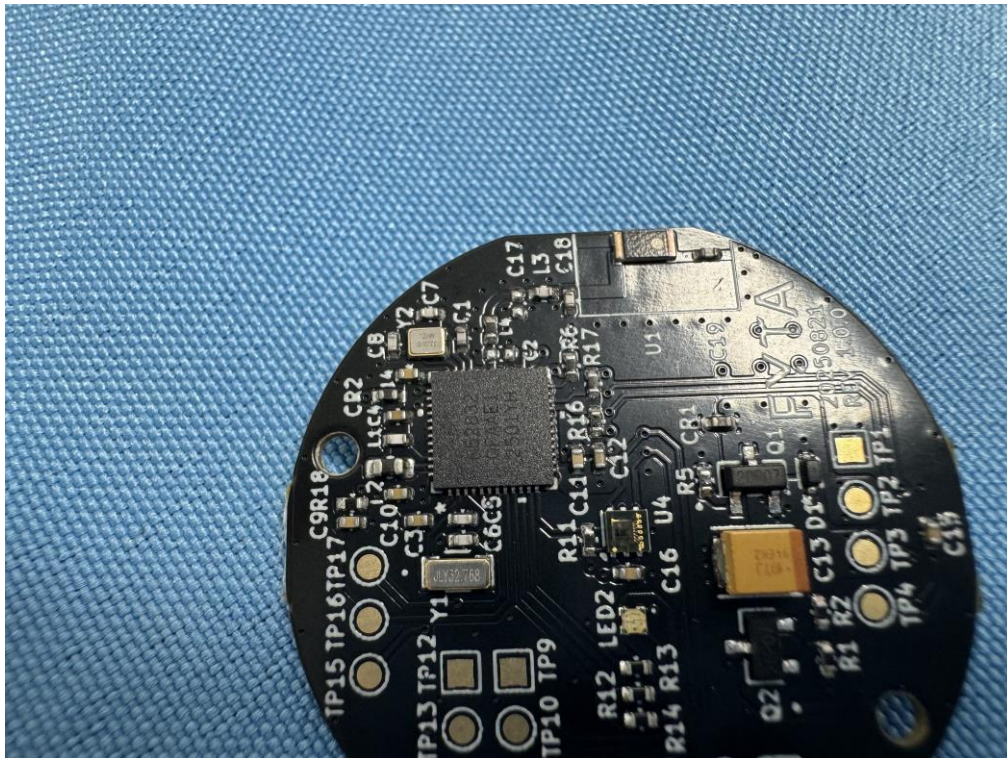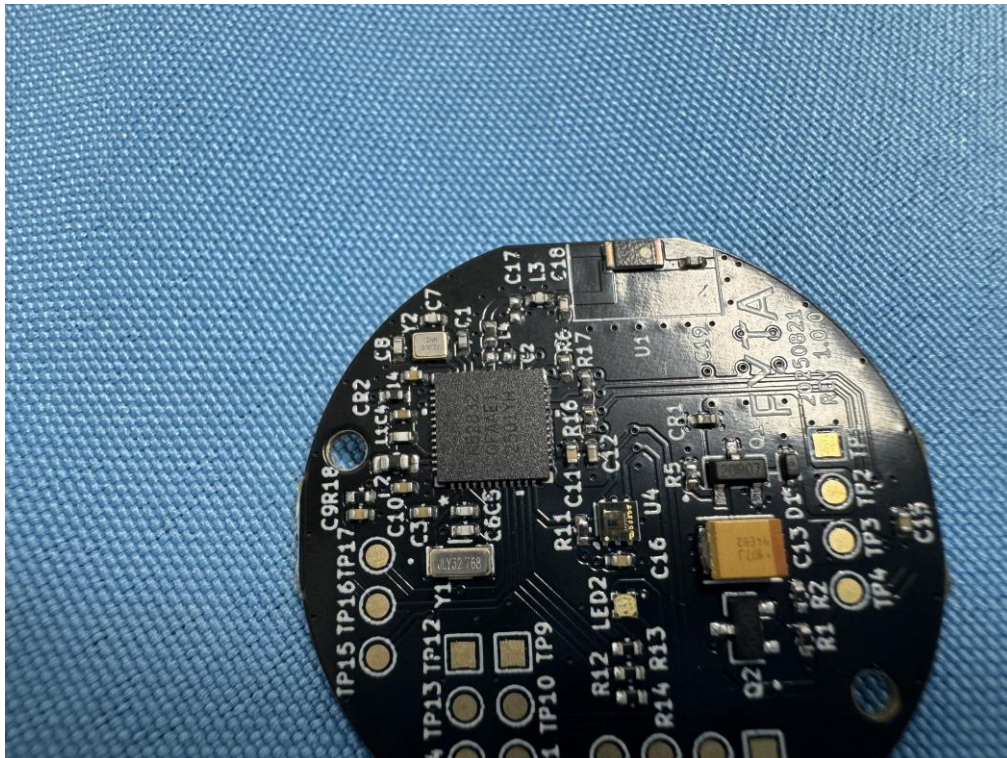

End of Test Report