


**Emission masks – In-band emissions**

FR1 n26 / 5MHz / DFT-S OFDM / PI/2 BPSK


Lowest MASK / 1RB0

Highest MASK / 1RBmax

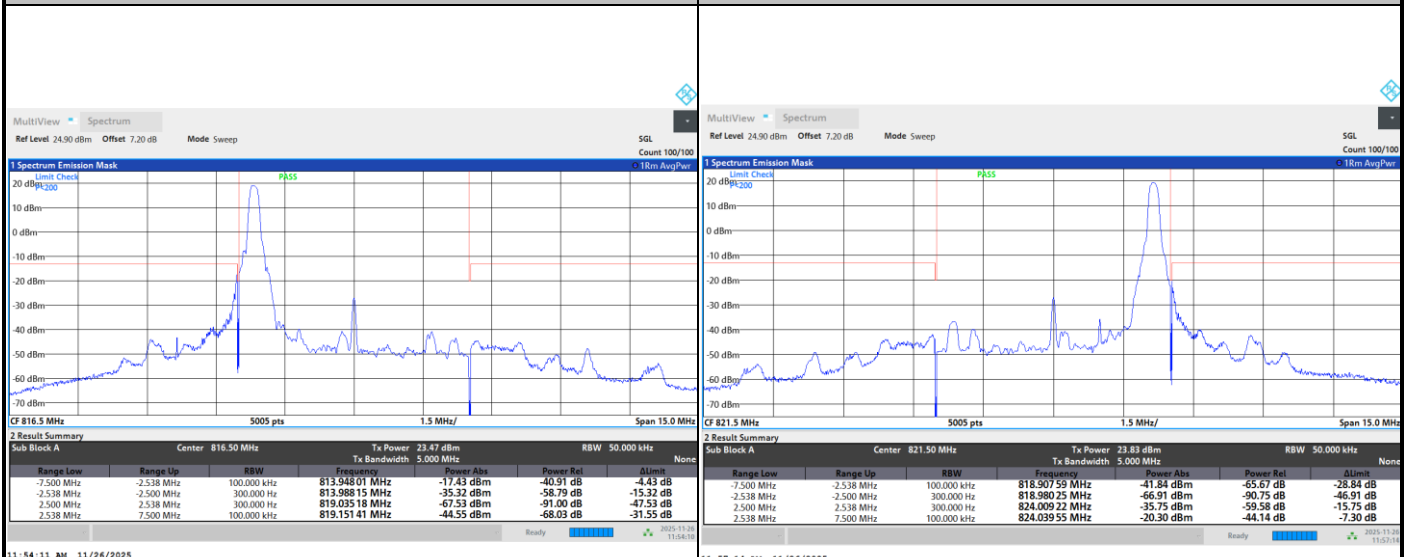

Lowest MASK / Full RB

Highest MASK / Full RB


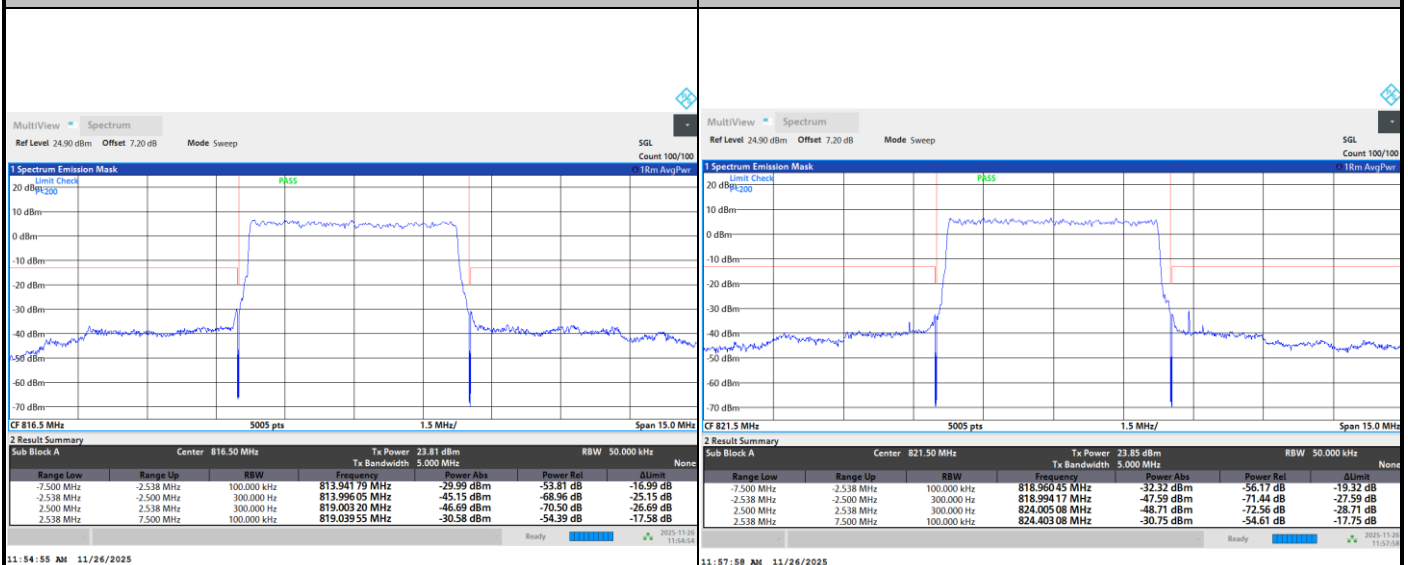




FR1 n26 / 5MHz / DFT-S OFDM / QPSK


Lowest MASK / 1RB0

Highest MASK / 1RBmax

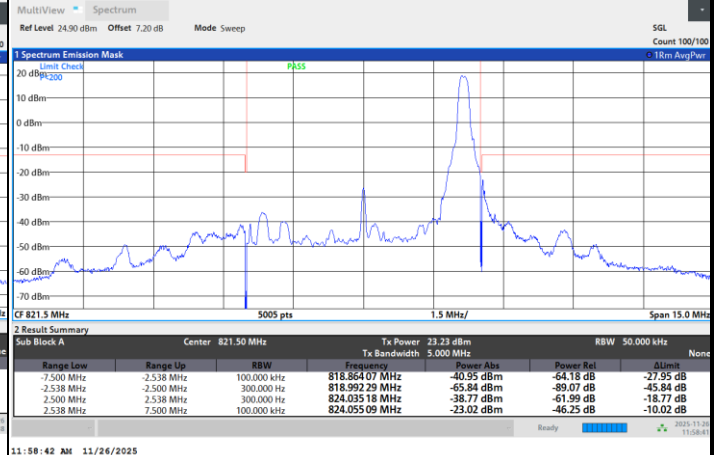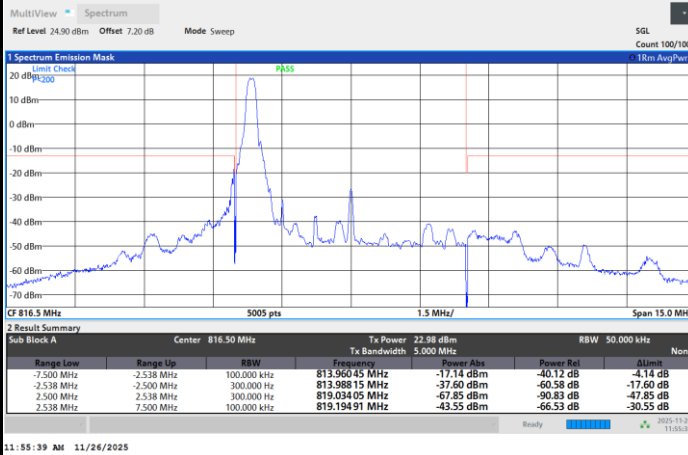

Lowest MASK / Full RB


Highest MASK / Full RB

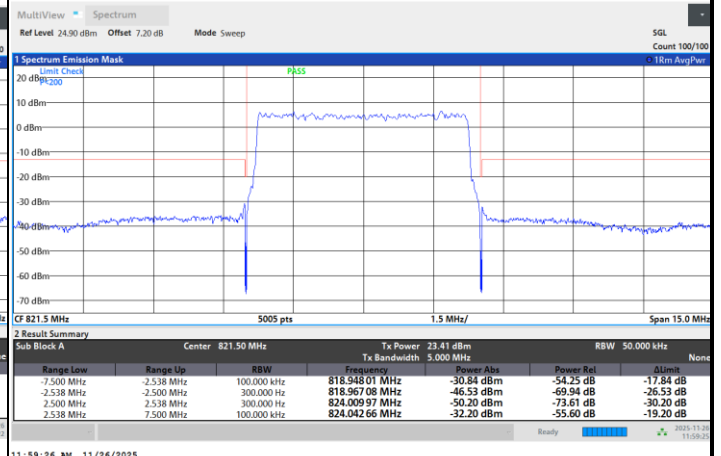



FR1 n26 / 10MHz / DFT-s-OFDM / PI/2 BPSK


Middle MASK / Full RB

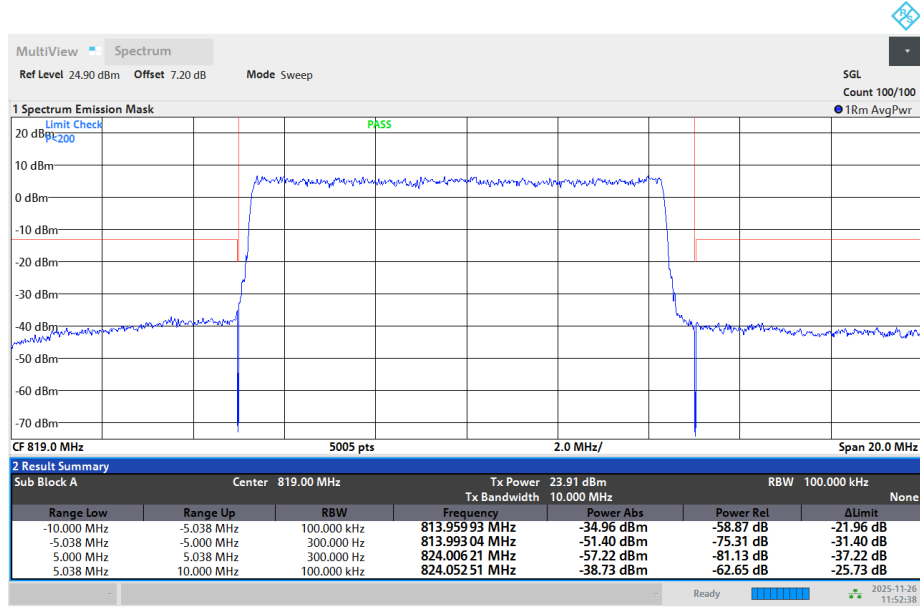

11-52-39 AM 11/26/2025

FR1 n26 / 10MHz / DFT-s-OFDM / QPSK

Lowest MASK / Full RB

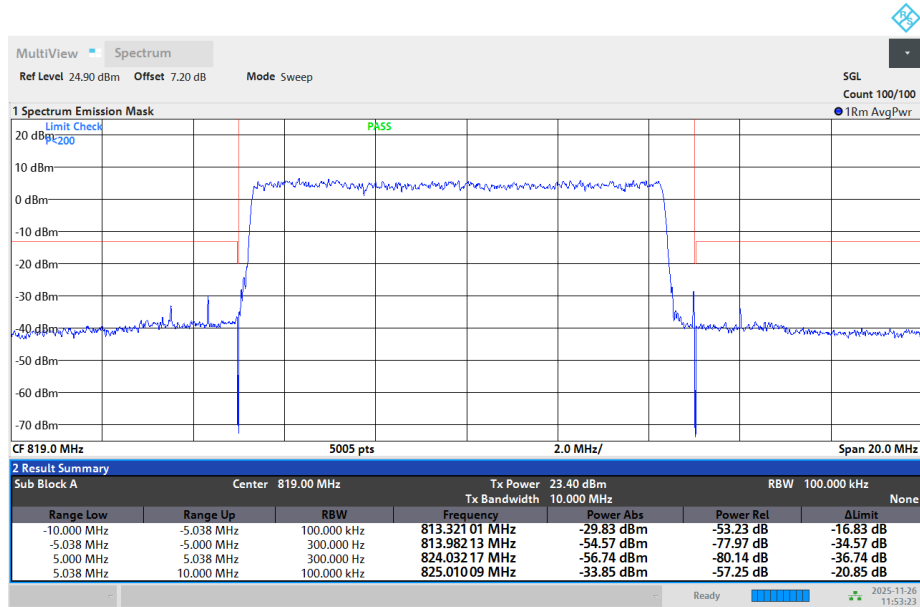

11-53-23 AM 11/26/2025




Emission masks – Out of band emissions

FR1 n26 / 5MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

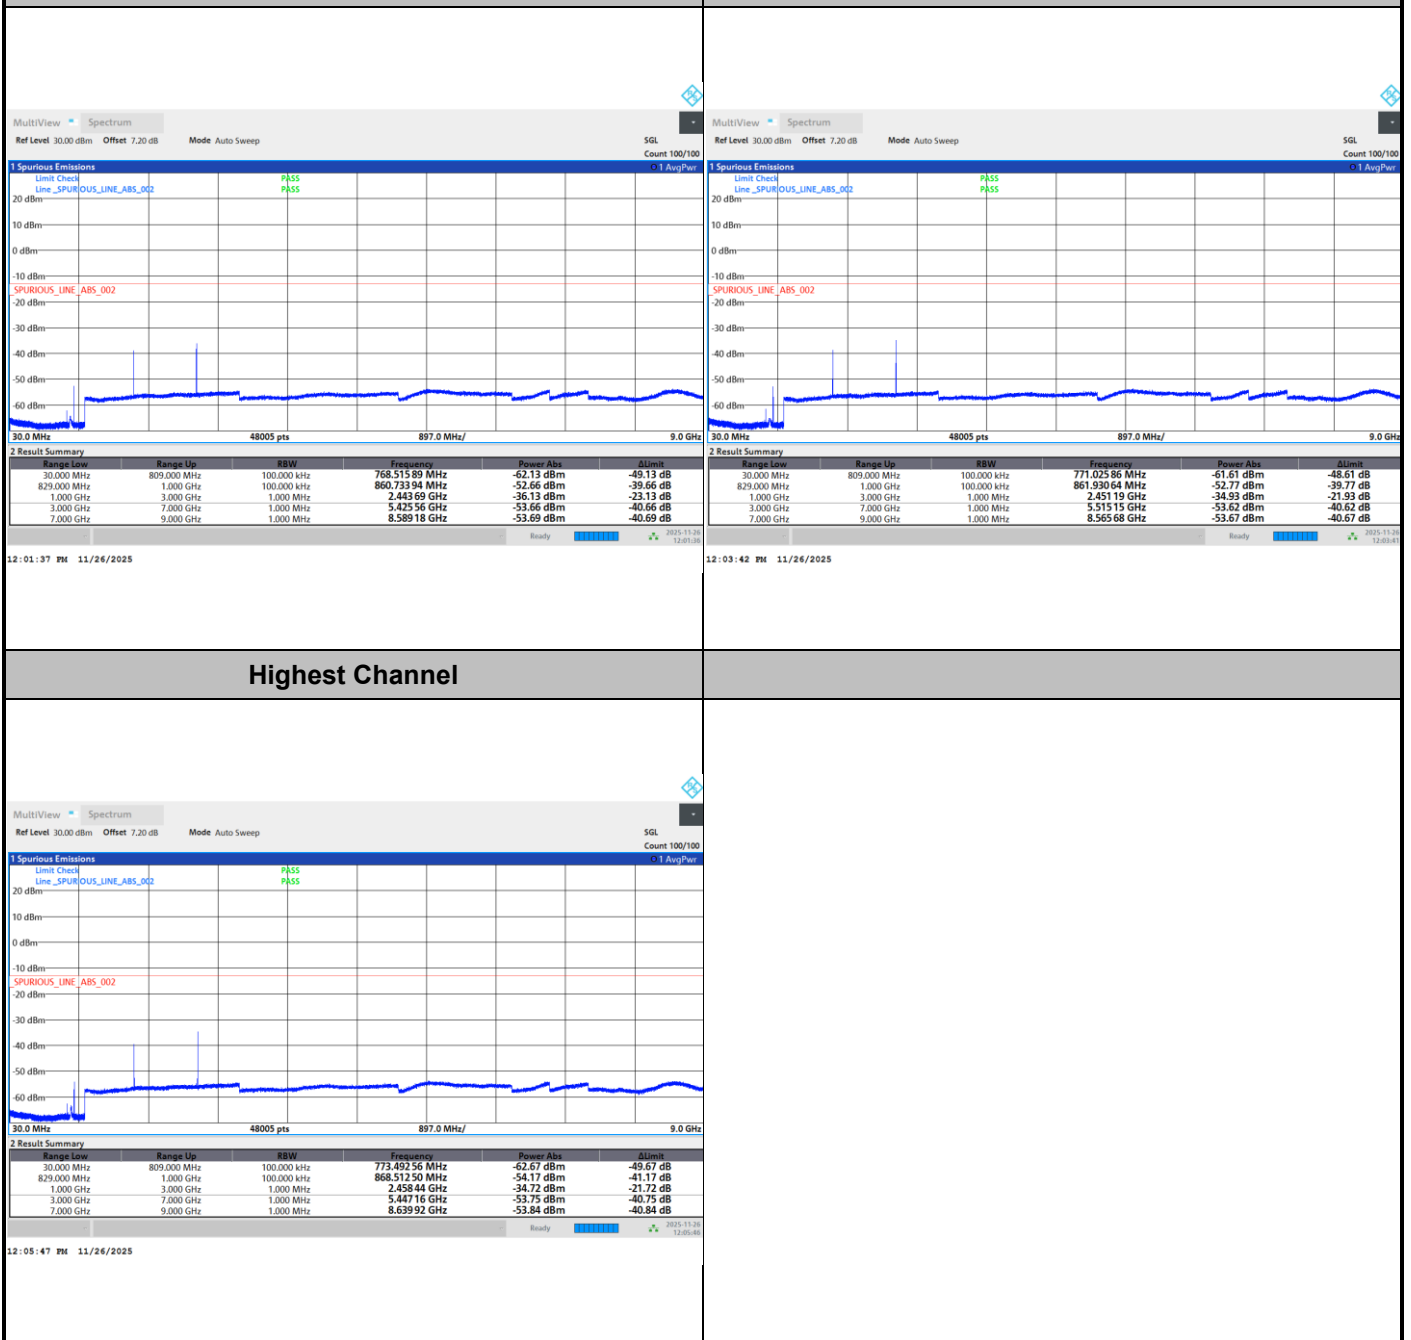

Frequency Stability

Test Conditions		FR1 n26 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0040	-3.3	Yes	PASS
40	Normal Voltage	0.0002	0.2	Yes	
30	Normal Voltage	0.0023	-1.9	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0002	0.2	Yes	
0	Normal Voltage	0.0164	-13.4	Yes	
-10	Normal Voltage	0.0181	-14.8	Yes	
-20	Normal Voltage	0.0000	0	Yes	
-30	Normal Voltage	0.0105	-8.6	Yes	
20	Maximum Voltage	0.0083	-6.8	Yes	
20	Normal Voltage	0.0128	-10.5	Yes	
20	Minimum Voltage	0.0200	-16.4	Yes	

Note:

1. Normal Voltage = 3.9 V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.


**FR1 n26 Part90s Straddle Channel****<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n26 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.56	5.48	6.34	6.66	PASS
Mode	FR1 n26 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	7.12				PASS




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

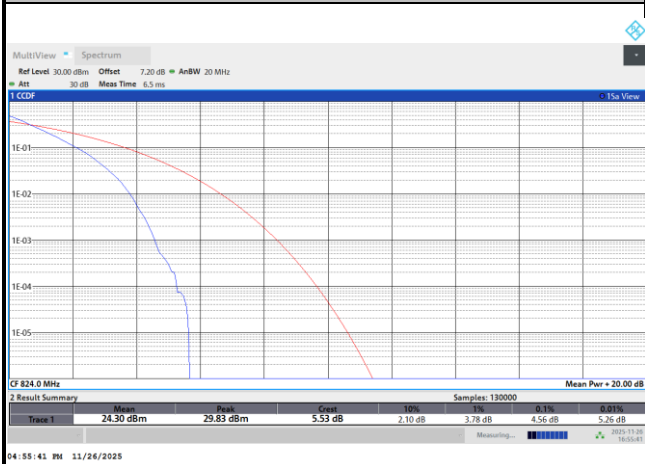


QPSK

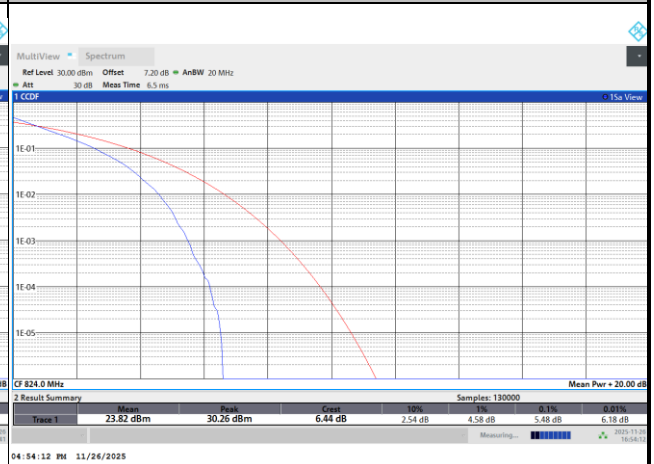


16QAM

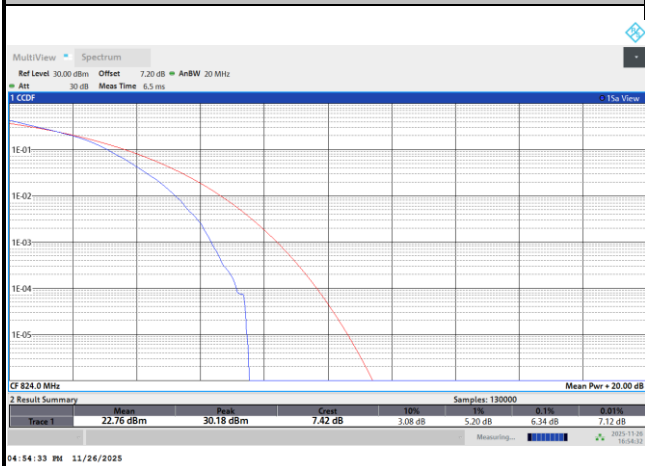

64QAM

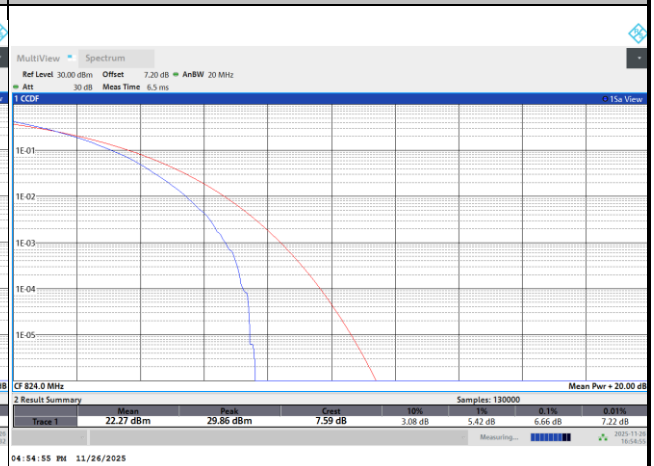

256QAM

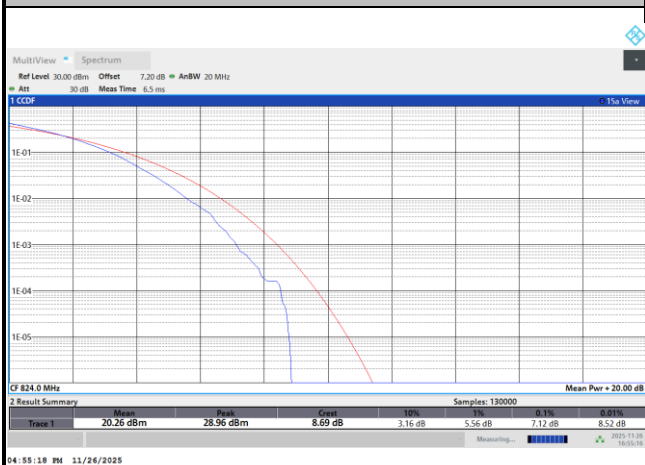




Mode	FR1 n26 / 5MHz / DFT-S OFDM		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	Full RB	Result
Middle CH	5.24	5.74	PASS
Mode	FR1 n26 / 10MHz / DFT-S OFDM		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	Full RB	Result
Middle CH	5.16	5.90	PASS
Mode	FR1 n26 / 15MHz / DFT-S OFDM		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	Full RB	Result
Middle CH	5.08	5.82	PASS




FR1 n26 / 5MHz / DFTs OFDM / Middle Channel / Full RB

QPSK

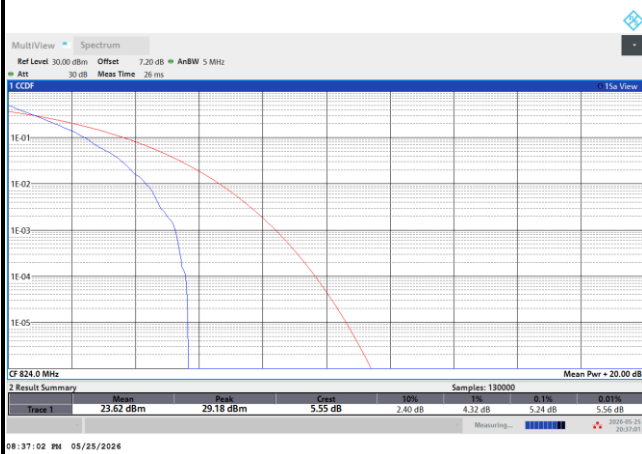


16QAM

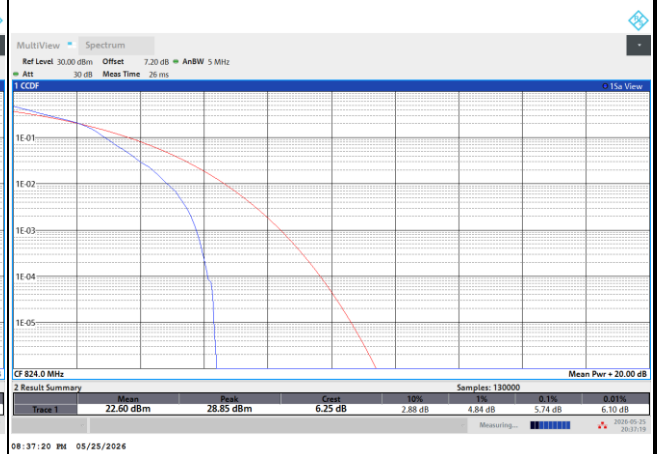


FR1 n26 / 10MHz / DFTs OFDM / Middle Channel / Full RB

QPSK

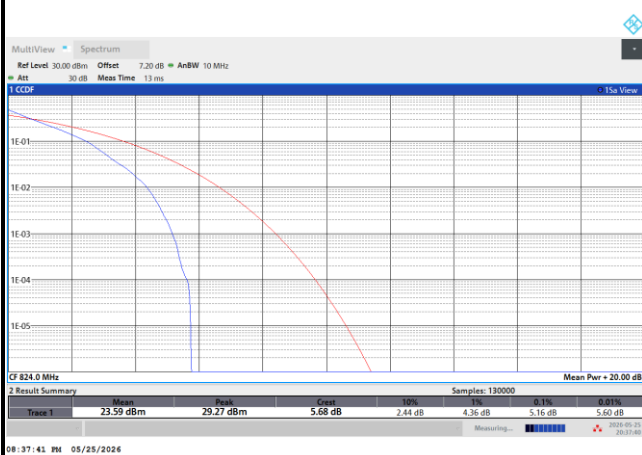


16QAM

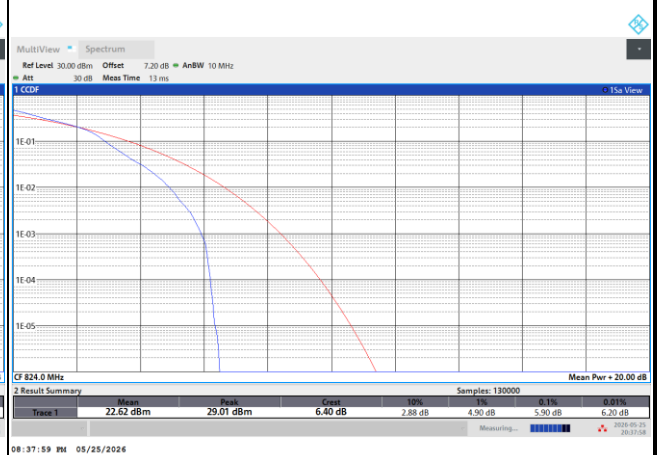


FR1 n26 / 15MHz / DFTs OFDM / Middle Channel / Full RB

QPSK

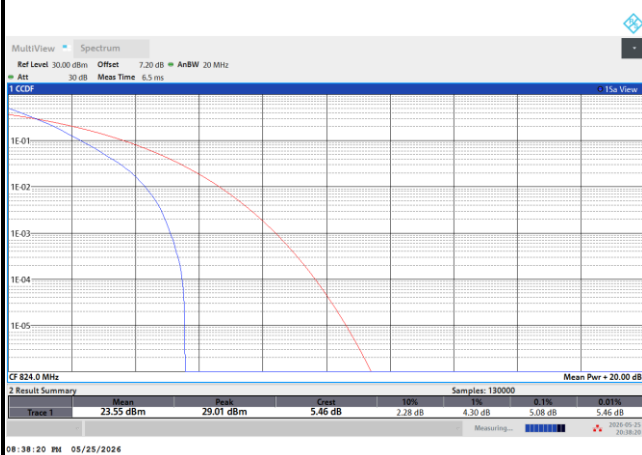


16QAM

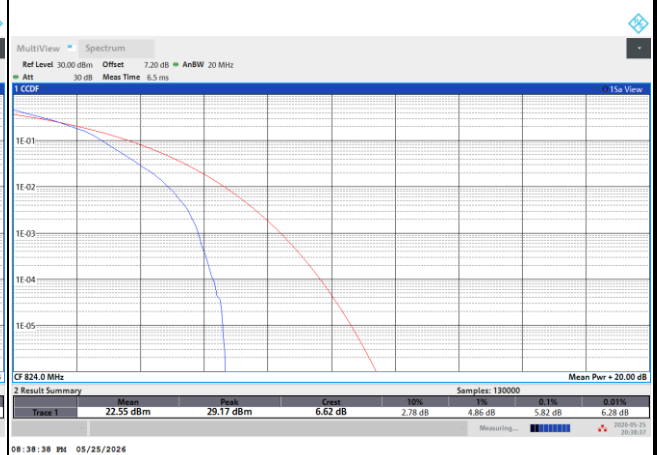

**26dB Bandwidth**


Mode	FR1 n26 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	5.25	4.99	9.61	9.52	14.25	14.40	19.41	19.26
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	4.88		9.54		14.29		19.20	

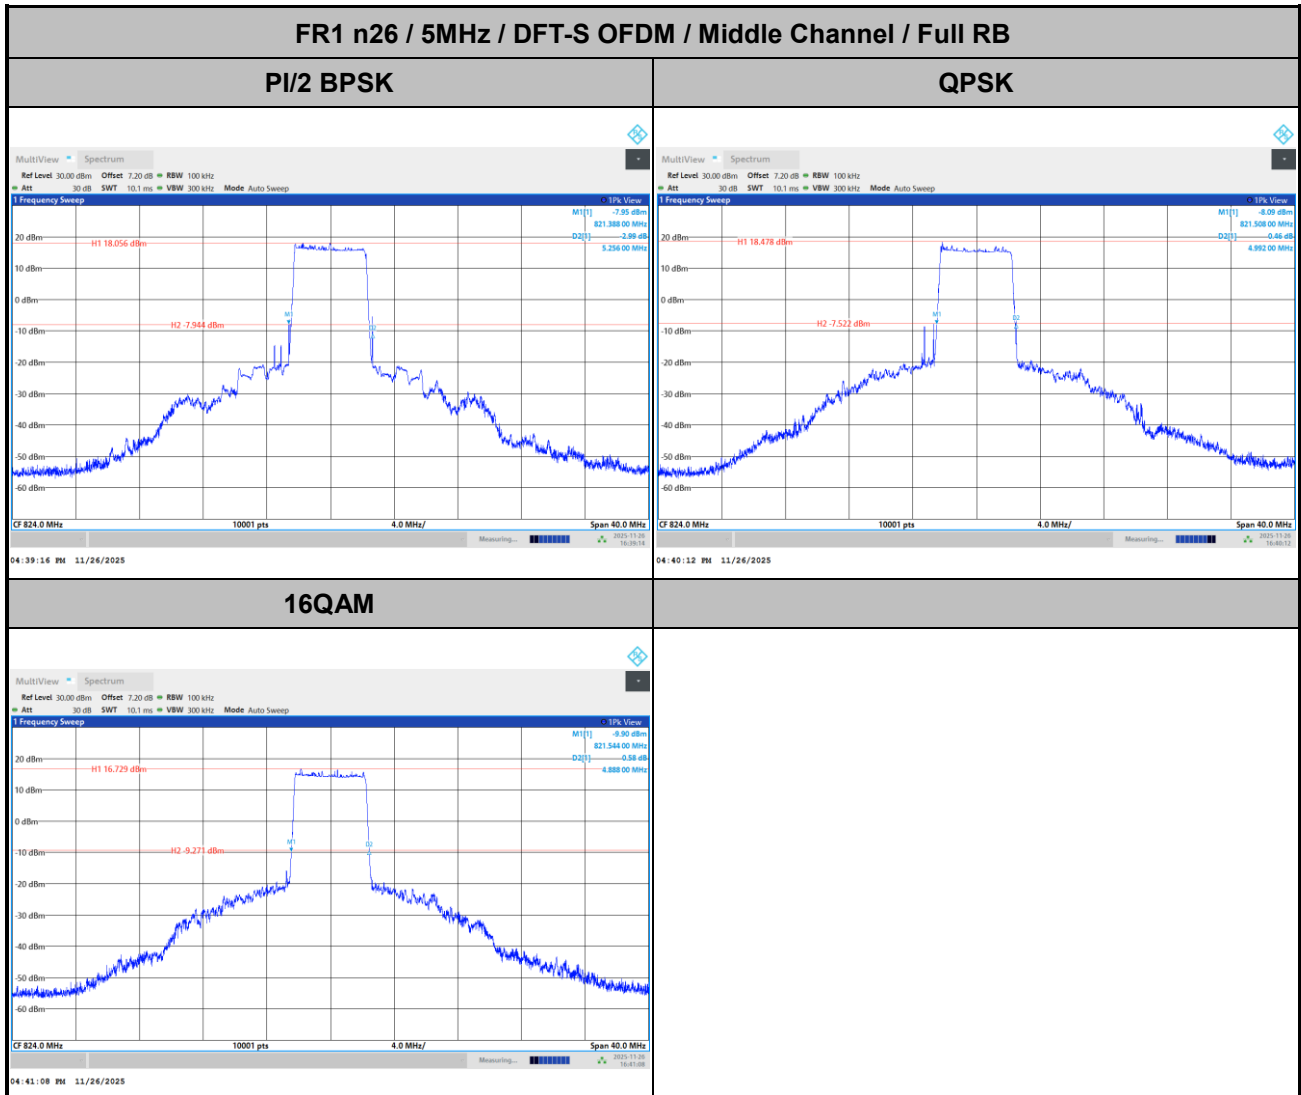




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

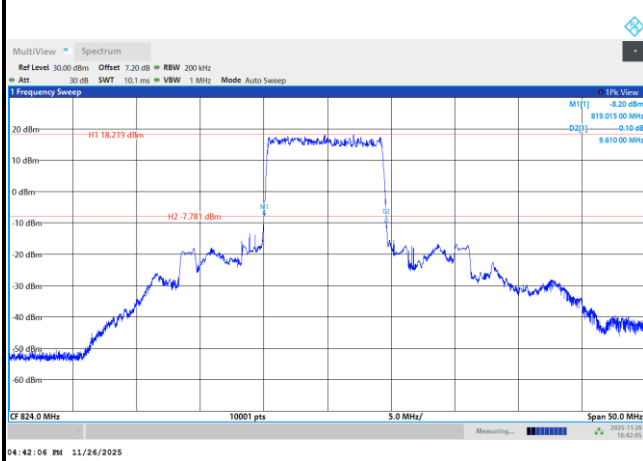

QPSK

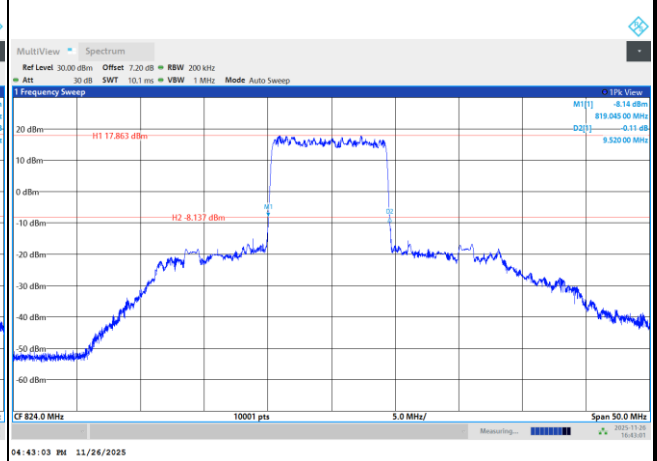


16QAM

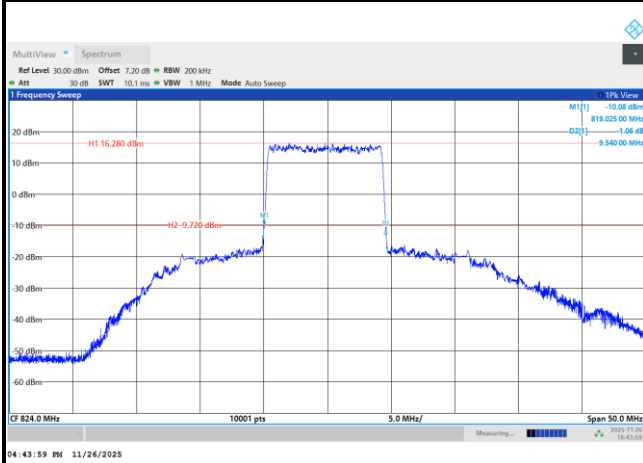




FR1 n26 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

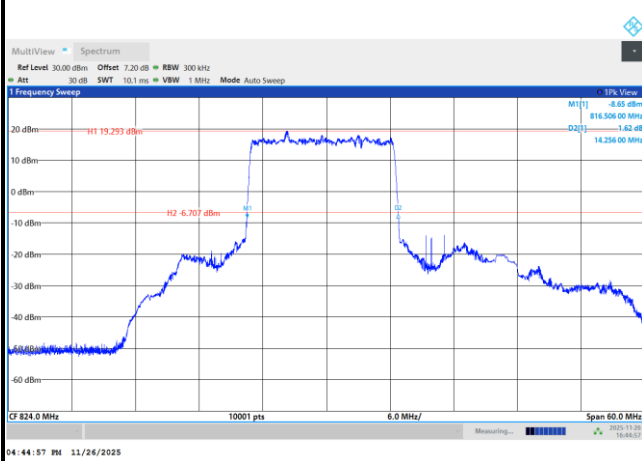


QPSK

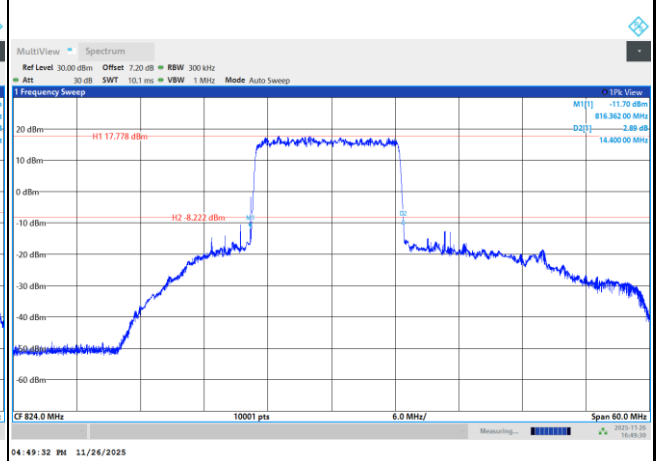

16QAM

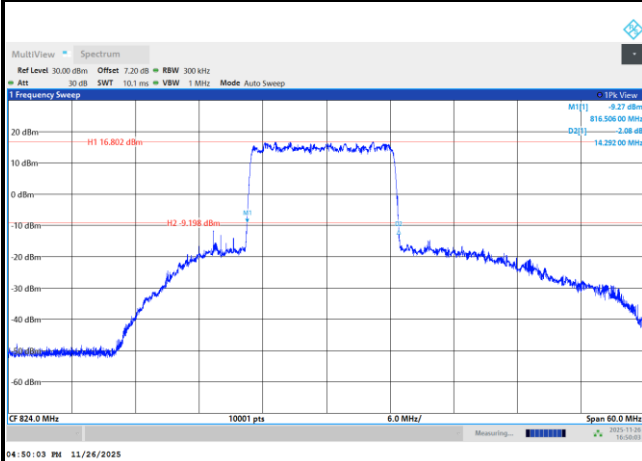

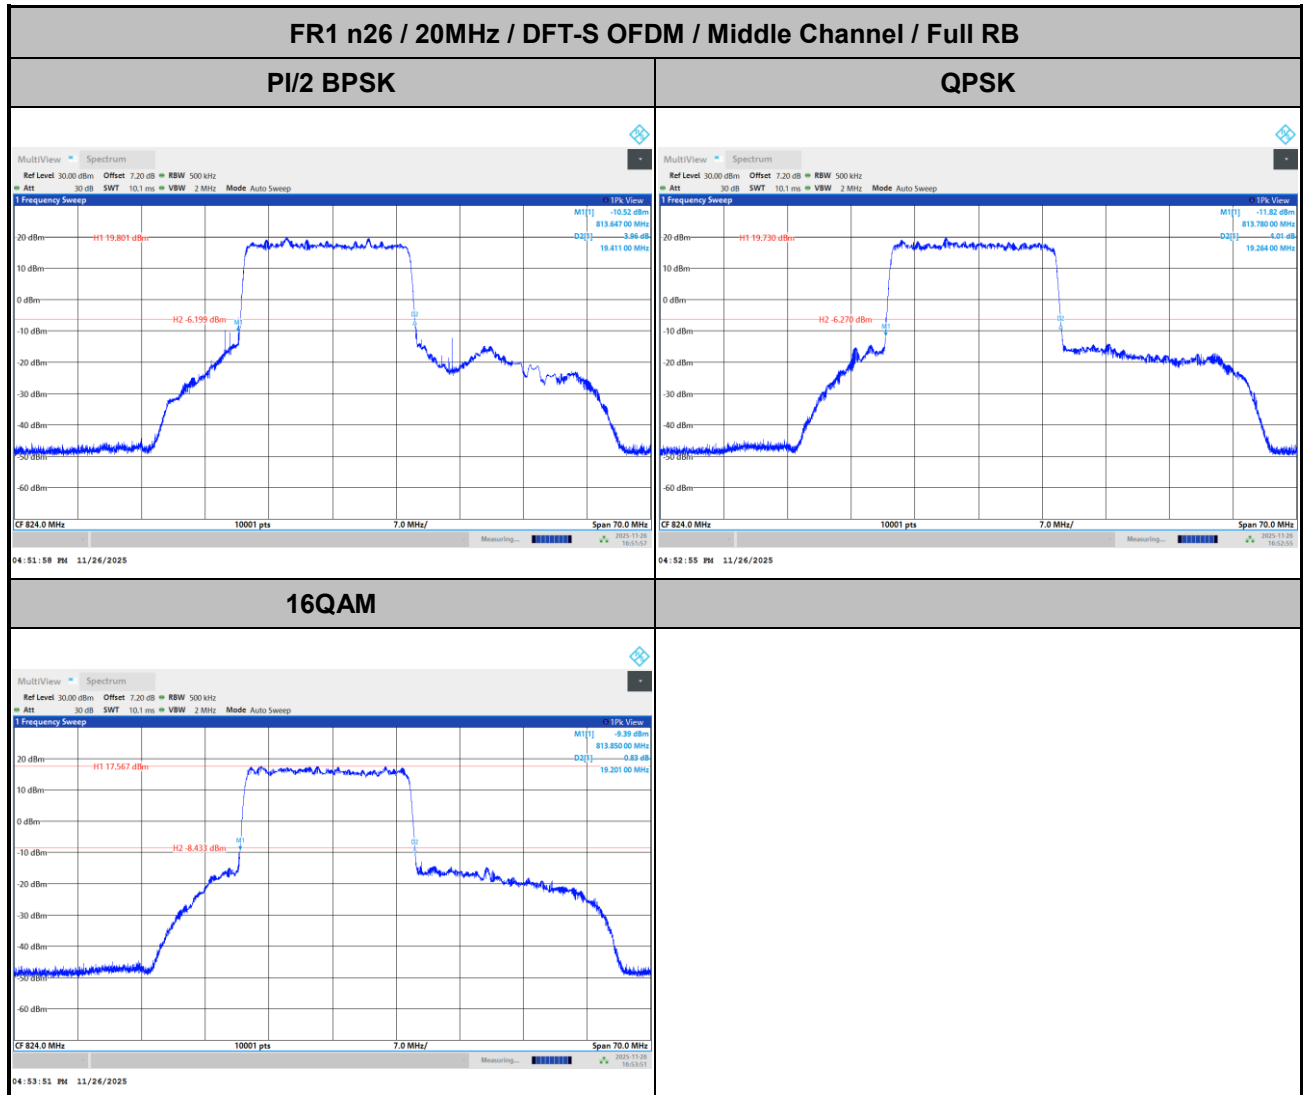


**Occupied Bandwidth**

Mode	FR1 n26 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	4.51	4.50	9.02	8.97	13.47	13.44	18.02	17.97
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	4.49		8.95		13.46		17.97	




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

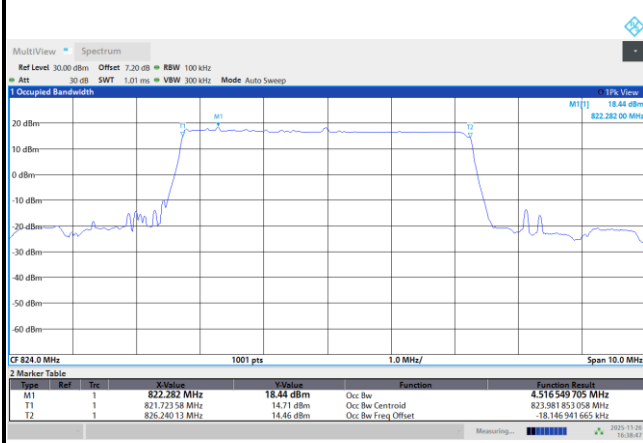


04:38:48 PM 11/26/2025

QPSK

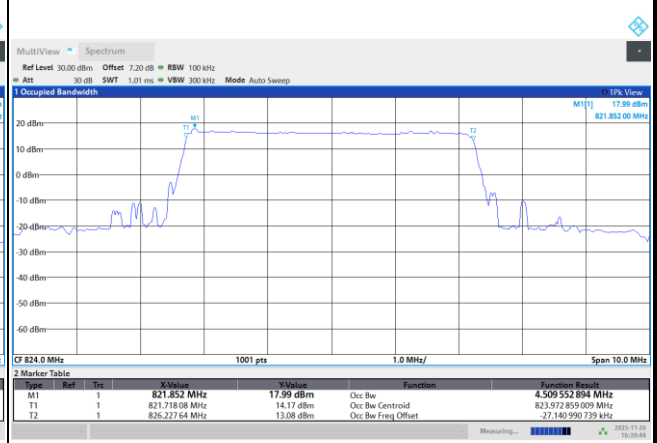

04:39:44 PM 11/26/2025

16QAM

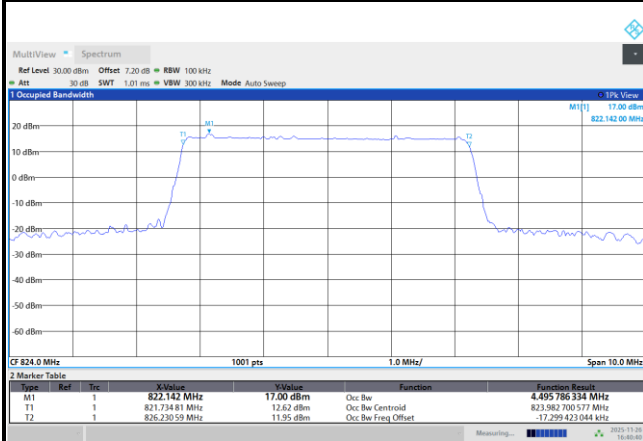


04:40:40 PM 11/26/2025




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

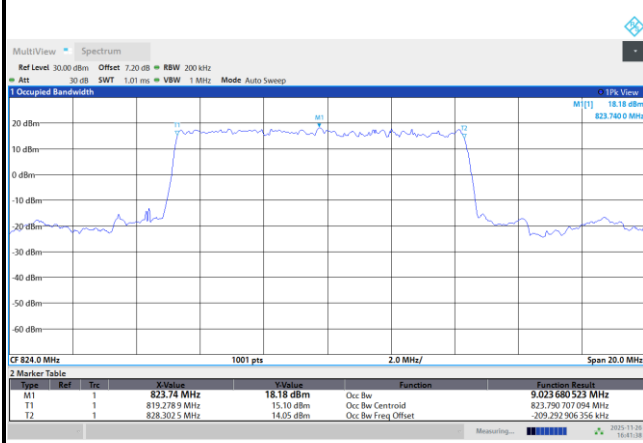


04:41:38 PM 11/26/2025

QPSK

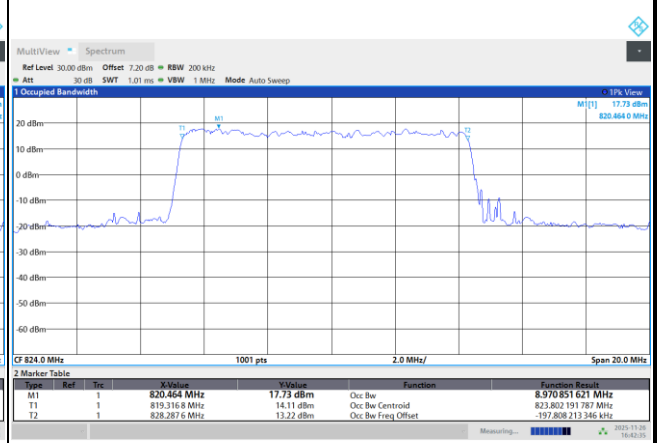

04:42:35 PM 11/26/2025

16QAM

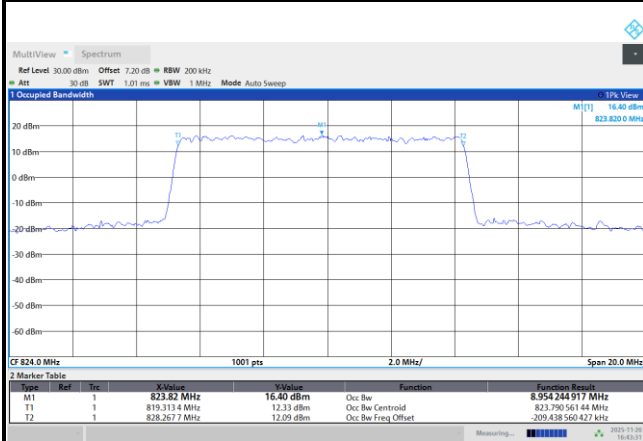


04:43:31 PM 11/26/2025




FR1 n26 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

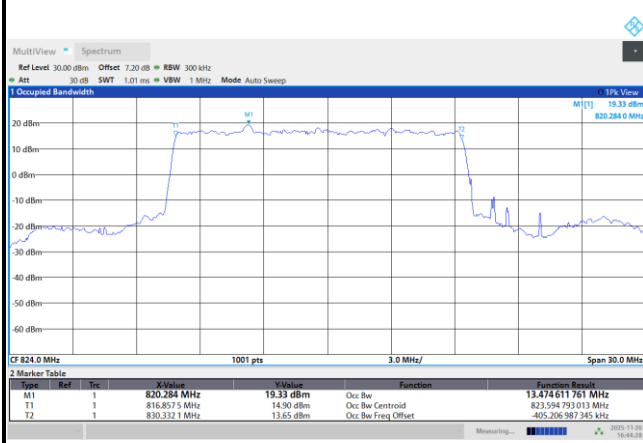


04:44:29 PM 11/26/2025

QPSK

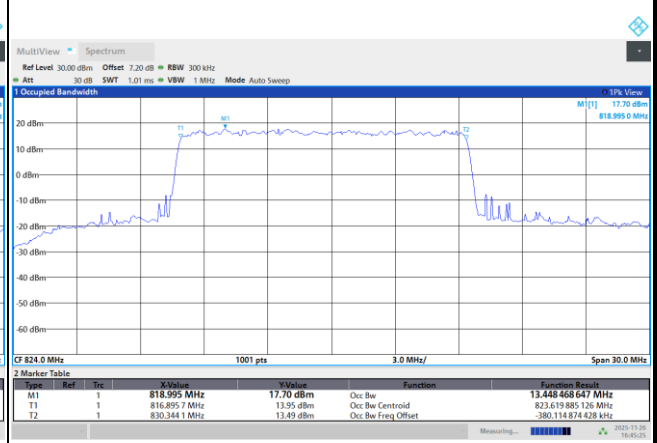

04:45:26 PM 11/26/2025

16QAM

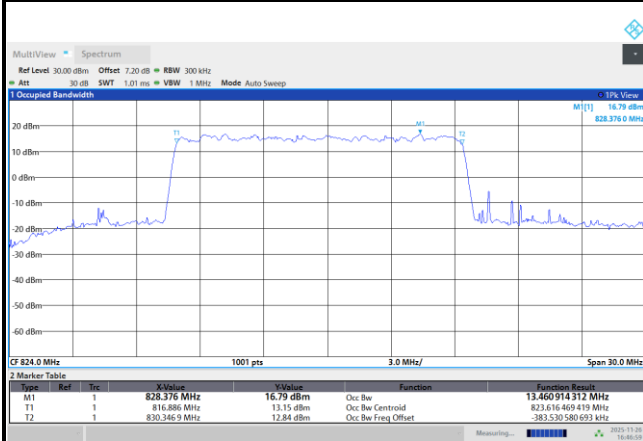


04:47:01 PM 11/26/2025




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

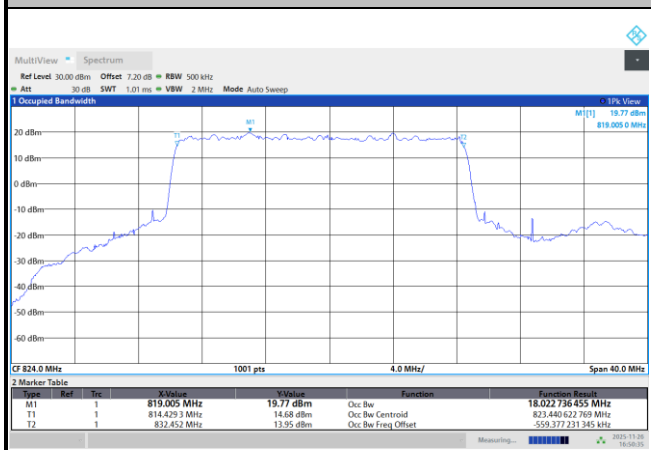


04:50:36 PM 11/26/2025

QPSK

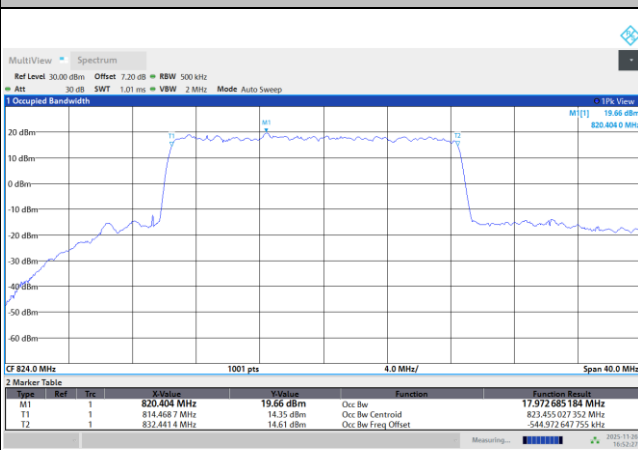

04:52:27 PM 11/26/2025

16QAM

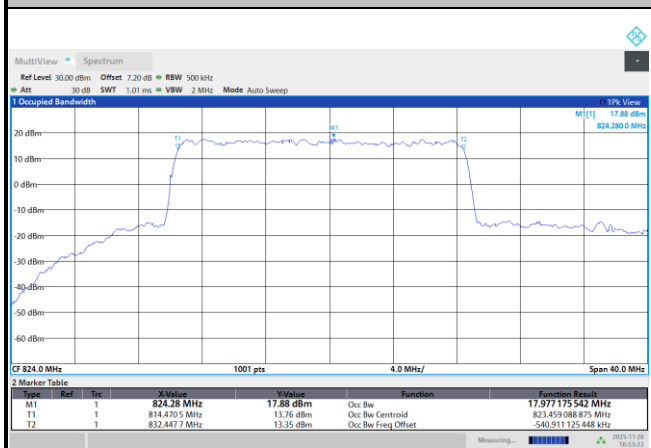


04:53:23 PM 11/26/2025



Emission masks – Out of band emissions

FR1 n26 / 5MHz / DFT-S OFDM / QPSK / 1RB1

Middle MASK / Full RB

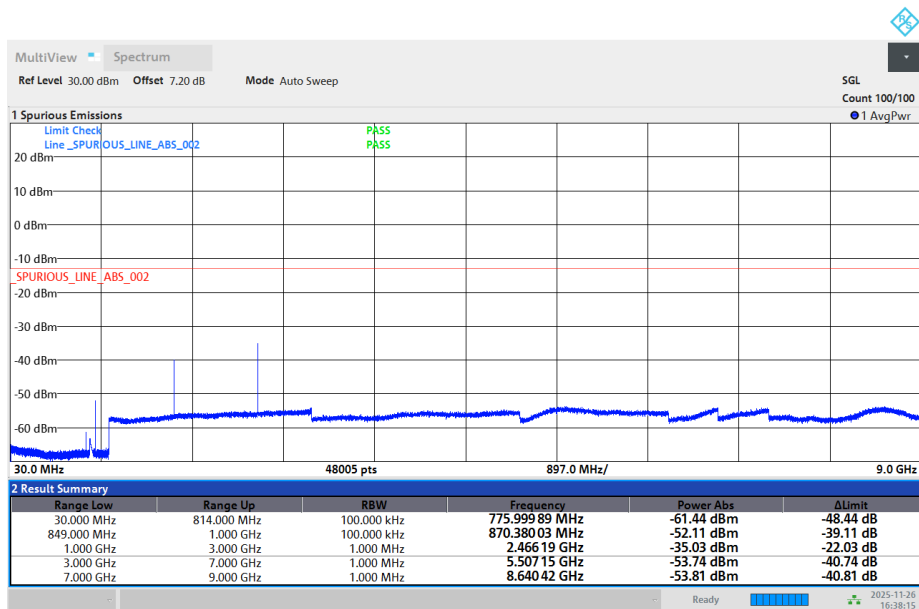

04:38:16 PM 11/26/2025

Frequency Stability

Test Conditions		FR1 n26 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0055	4.5	Yes	PASS
40	Normal Voltage	0.0157	12.9	Yes	
30	Normal Voltage	0.0053	-4.4	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0056	4.6	Yes	
0	Normal Voltage	0.0102	8.4	Yes	
-10	Normal Voltage	0.0007	-0.6	Yes	
-20	Normal Voltage	0.0170	14	Yes	
-30	Normal Voltage	0.0032	-2.6	Yes	
20	Maximum Voltage	0.0001	0.1	Yes	
20	Normal Voltage	0.0083	6.8	Yes	
20	Minimum Voltage	0.0046	3.8	Yes	

Note:

1. Normal Voltage = 3.9 V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.



Appendix B. Radiated Spurious Emission Test Data

B1.Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	NR SA n26	Part 90S	L	2444	-60.63	RMS	26.68	-23.31	0.91	-95.23	30.32	-13.00	-47.63	V	0
2	NR SA n26	Part 90S	M	2451	-60.06	RMS	26.79	-23.30	0.91	-95.23	30.77	-13.00	-47.06	V	1
3	NR SA n26	Part 90S	M	3270	-63.08	RMS	27.98	-22.74	1.05	-95.23	25.86	-13.00	-50.08	V	0
4	NR SA n26	Part 90S	M	2453	-63.15	RMS	26.77	-23.30	0.91	-95.23	27.70	-13.00	-50.15	V	1
5	EN-DC B7+n26	Part 90S	M	3270	-64.56	RMS	27.98	-23.81	1.05	-95.23	25.45	-13.00	-51.56	H	2+0
6	NR SA n14	Part 90R	H	1587	-67.50	RMS	24.57	-24.42	1.06	-95.23	26.52	-42.15	-25.35	H	0
7	NR SA n14	Part 90R	M	1578	-67.50	RMS	24.50	-24.43	1.06	-95.23	26.60	-42.15	-25.35	V	0
8	NR SA n14	Part 90R	M	1582	-67.82	RMS	24.52	-24.43	1.06	-95.23	26.26	-42.15	-25.67	H	1
9	NR SA n14	Part 90R	M	1578	-65.78	RMS	24.50	-24.43	1.06	-95.23	28.32	-42.15	-23.63	V	1




Ant. 0

Part 90S Mode 1

NR SA n26 5M Ch163300 1RB1 BPSK

L

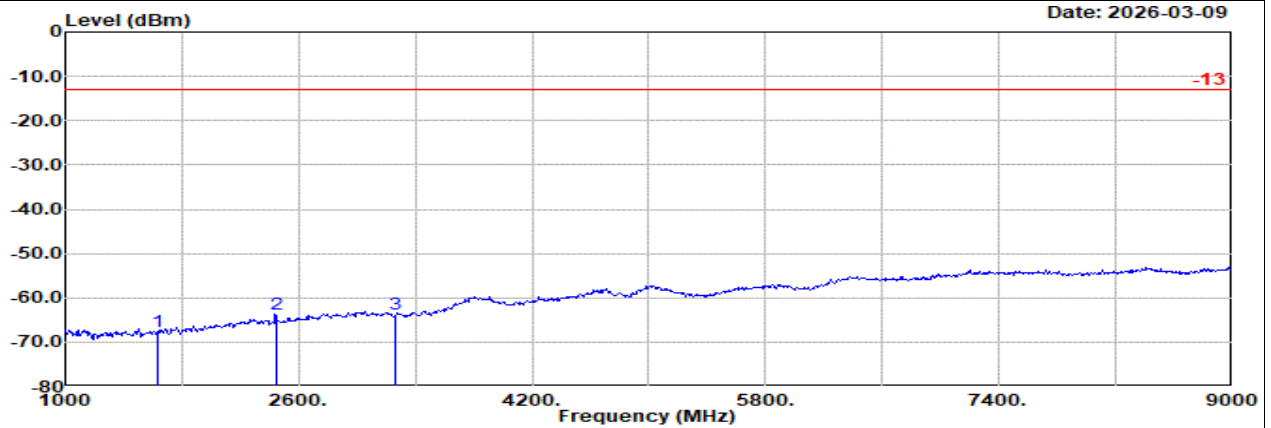


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 5M Ch163300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1629.00	-67.56	RMS	24.60	-24.37	1.07	-95.23	26.37	-13.00	-54.56
2	2444.00	-63.56	RMS	26.68	-23.31	0.91	-95.23	27.39	-13.00	-50.56
3	3258.00	-63.57	RMS	27.93	-22.73	1.05	-95.23	25.41	-13.00	-50.57

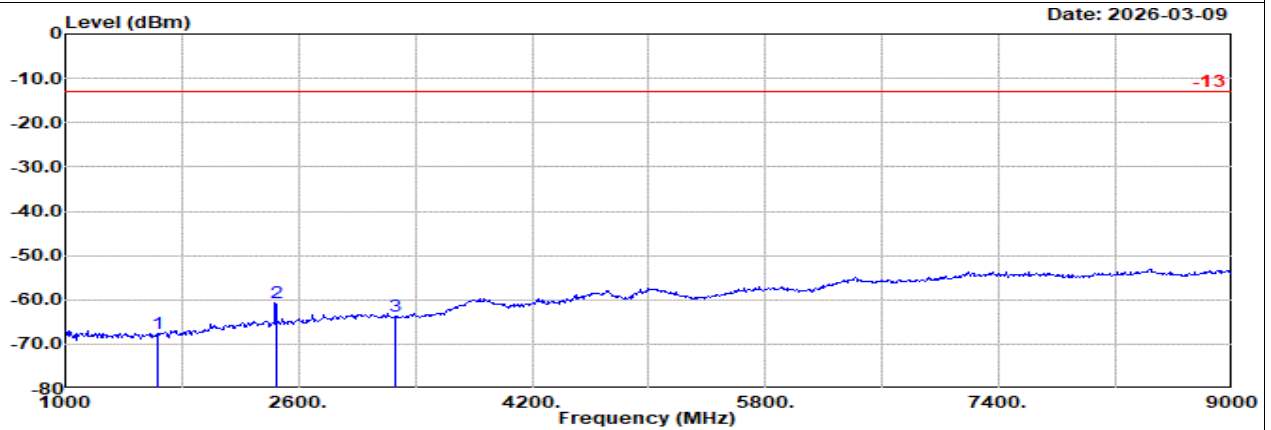

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 5M Ch163300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1629.00	-67.51	RMS	24.60	-24.37	1.07	-95.23	26.42	-13.00	-54.51
2	2444.00	-60.63	RMS	26.68	-23.31	0.91	-95.23	30.32	-13.00	-47.63
3	3258.00	-63.76	RMS	27.93	-22.73	1.05	-95.23	25.22	-13.00	-50.76




Ant. 0

Part 90S Mode 1

NR SA n26 5M Ch163800 1RB1 BPSK

M

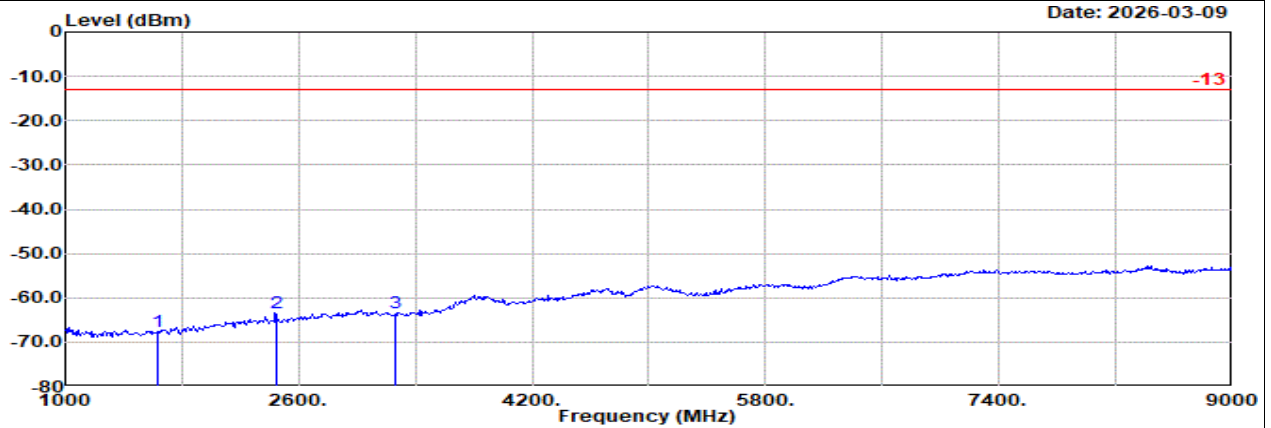


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1634.00	-67.72	RMS	24.64	-24.36	1.07	-95.23	26.16	-13.00	-54.72	Horizontal
2	2451.00	-63.51	RMS	26.79	-23.30	0.91	-95.23	27.32	-13.00	-50.51	Horizontal
3	3268.00	-63.53	RMS	27.97	-22.74	1.05	-95.23	25.42	-13.00	-50.53	Horizontal

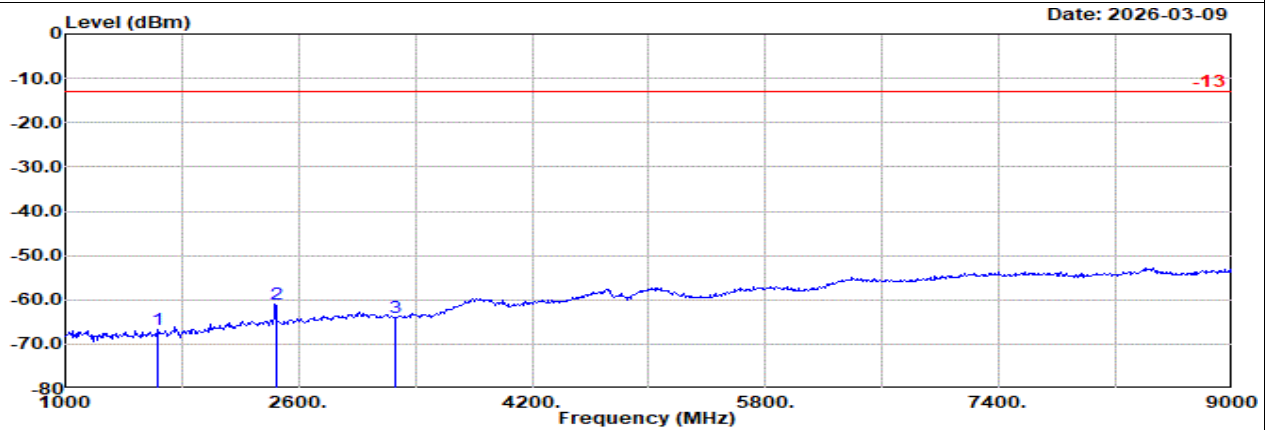

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1634.00	-66.80	RMS	24.64	-24.36	1.07	-95.23	27.08	-13.00	-53.80	Vertical
2	2451.00	-60.90	RMS	26.79	-23.30	0.91	-95.23	29.93	-13.00	-47.90	Vertical
3	3268.00	-63.85	RMS	27.97	-22.74	1.05	-95.23	25.10	-13.00	-50.85	Vertical




Ant. 0

Part 90S Mode 1

NR SA n26 5M Ch164300 1RB1 BPSK

H

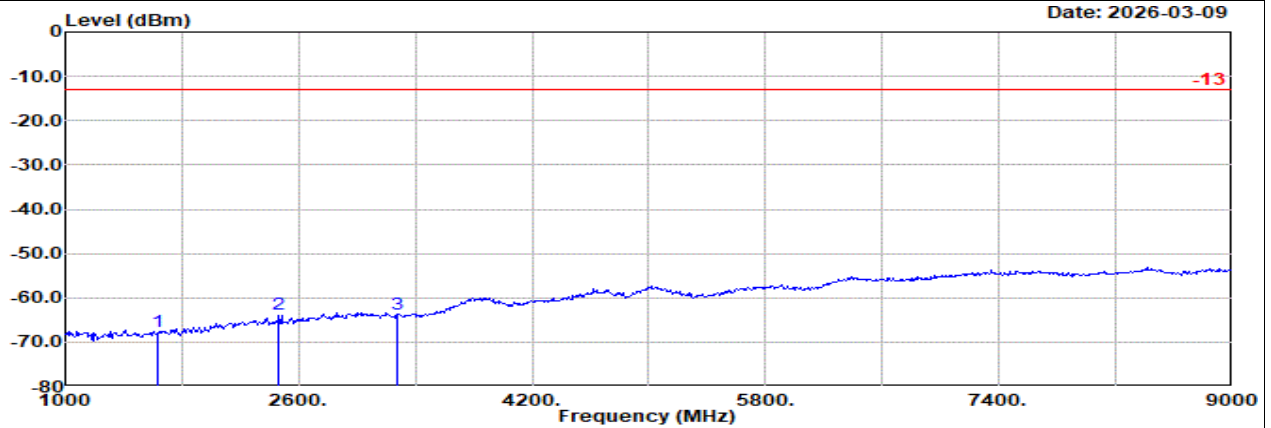


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 5M Ch164300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm						g			
1	1639.00	-67.57	RMS	24.69	-24.36	1.07	-95.23	26.26	-13.00	-54.57	Horizontal
2	2459.00	-63.66	RMS	26.71	-23.29	0.91	-95.23	27.24	-13.00	-50.66	Horizontal
3	3278.00	-63.78	RMS	28.01	-22.74	1.05	-95.23	25.13	-13.00	-50.78	Horizontal

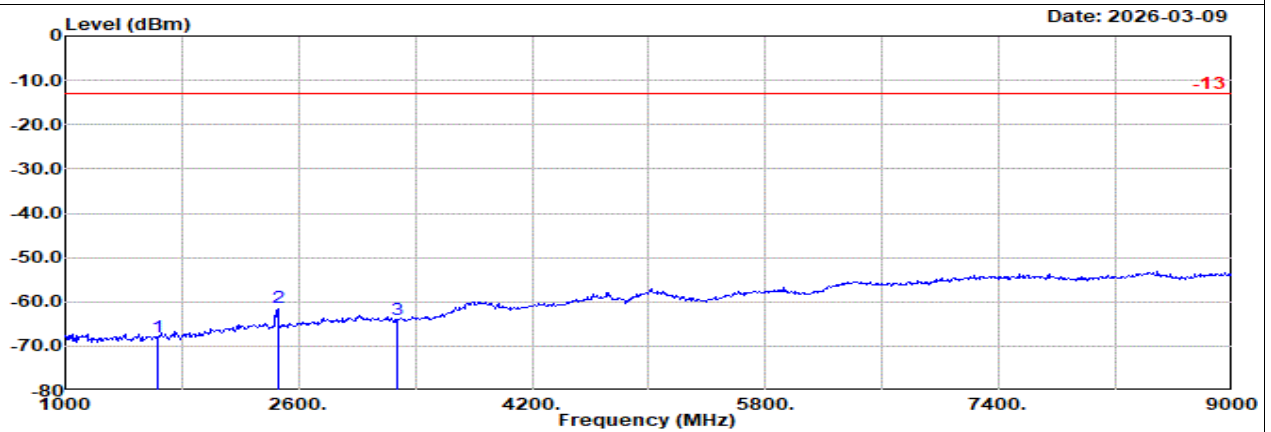

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 5M Ch164300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm						g			
1	1639.00	-67.80	RMS	24.69	-24.36	1.07	-95.23	26.03	-13.00	-54.80	Vertical
2	2459.00	-61.30	RMS	26.71	-23.29	0.91	-95.23	29.60	-13.00	-48.30	Vertical
3	3278.00	-63.98	RMS	28.01	-22.74	1.05	-95.23	24.93	-13.00	-50.98	Vertical




Ant. 0

Part 90S Mode 3

NR SA n26 15M Ch164800 1RB1 BPSK

M

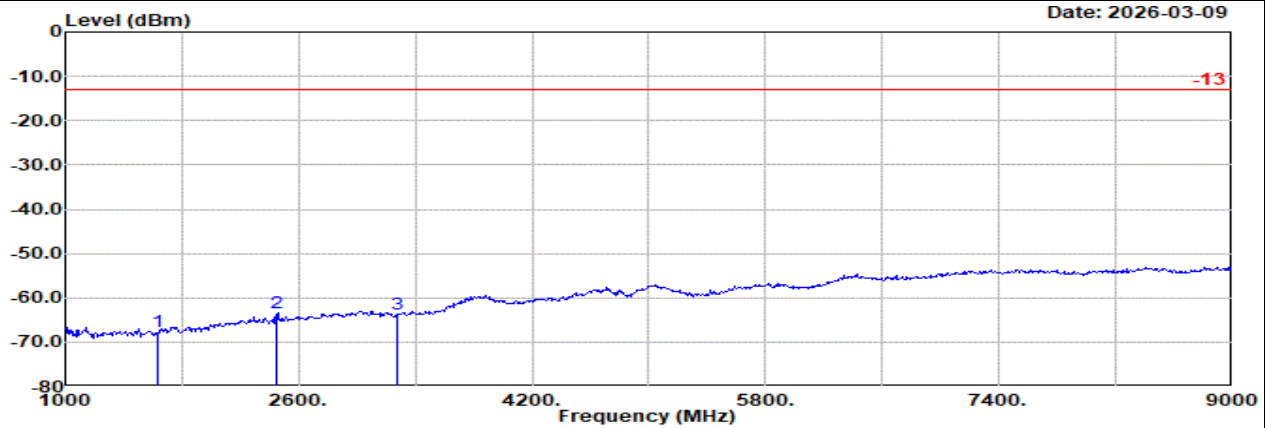


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 15M Ch164800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1635.00	-67.70	RMS	24.65	-24.36	1.07	-95.23	26.17	-13.00	-54.70
2	2453.00	-63.53	RMS	26.77	-23.30	0.91	-95.23	27.32	-13.00	-50.53
3	3270.00	-63.67	RMS	27.98	-22.74	1.05	-95.23	25.27	-13.00	-50.67

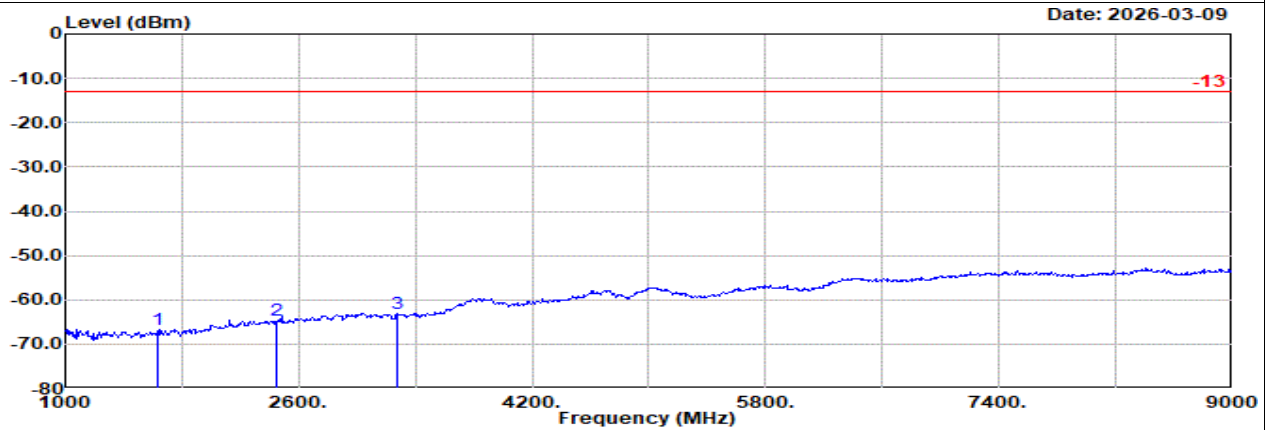

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 15M Ch164800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1635.00	-66.73	RMS	24.65	-24.36	1.07	-95.23	27.14	-13.00	-53.73
2	2453.00	-64.73	RMS	26.77	-23.30	0.91	-95.23	26.12	-13.00	-51.73
3	3270.00	-63.08	RMS	27.98	-22.74	1.05	-95.23	25.86	-13.00	-50.08




Ant. 1

Part 90S Mode 2

NR SA n26 5M Ch163800 1RB1 BPSK

M

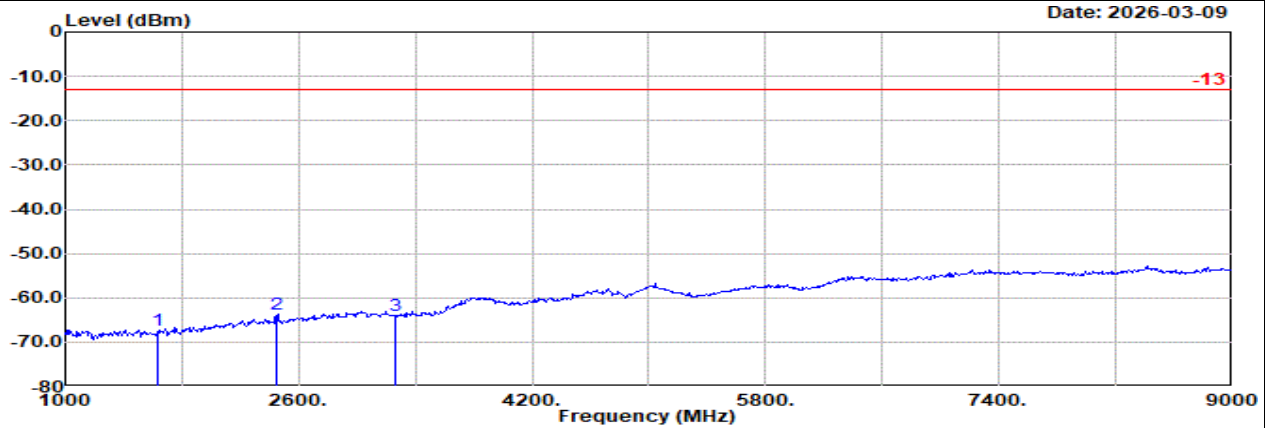


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1634.00	-67.31	RMS		24.64	-24.36	1.07	-95.23	26.57	-13.00	-54.31	Horizontal
2	2451.00	-63.80	RMS		26.79	-23.30	0.91	-95.23	27.03	-13.00	-50.80	Horizontal
3	3268.00	-63.96	RMS		27.97	-22.74	1.05	-95.23	24.99	-13.00	-50.96	Horizontal

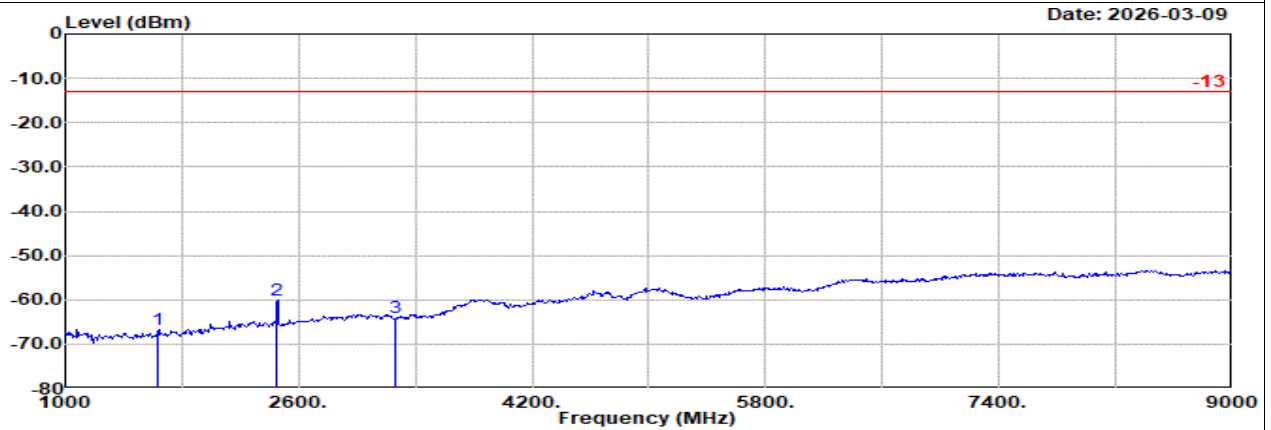

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1634.00	-66.79	RMS		24.64	-24.36	1.07	-95.23	27.09	-13.00	-53.79	Vertical
2	2451.00	-60.06	RMS		26.79	-23.30	0.91	-95.23	30.77	-13.00	-47.06	Vertical
3	3268.00	-64.15	RMS		27.97	-22.74	1.05	-95.23	24.80	-13.00	-51.15	Vertical




Ant. 1

Part 90S Mode 4

NR SA n26 15M Ch164800 1RB1 BPSK

M

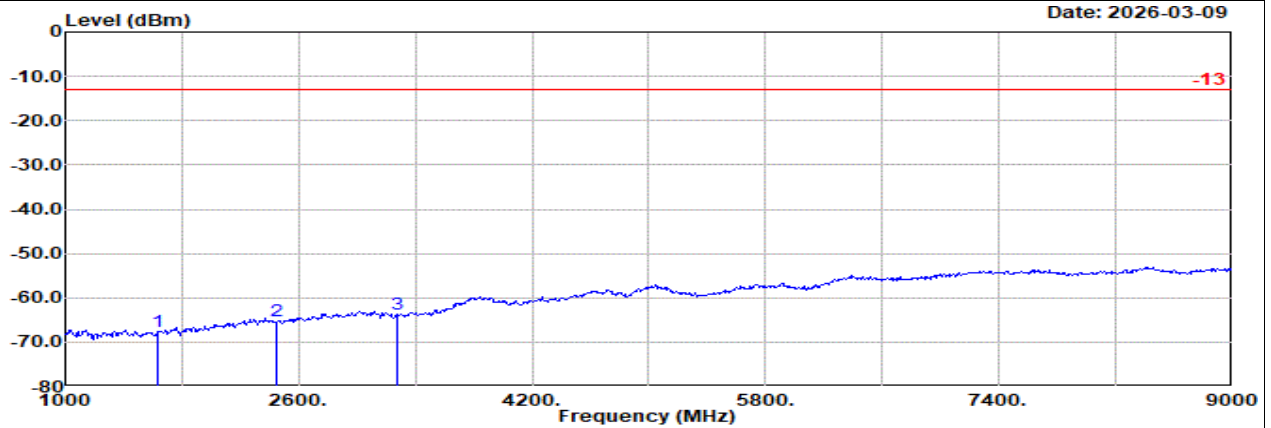


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 15M Ch164800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1635.00	-67.63	RMS		24.65	-24.36	1.07	-95.23	26.24	-13.00	-54.63		Horizontal
2	2453.00	-65.11	RMS		26.77	-23.30	0.91	-95.23	25.74	-13.00	-52.11		Horizontal
3	3270.00	-63.70	RMS		27.98	-22.74	1.05	-95.23	25.24	-13.00	-50.70		Horizontal

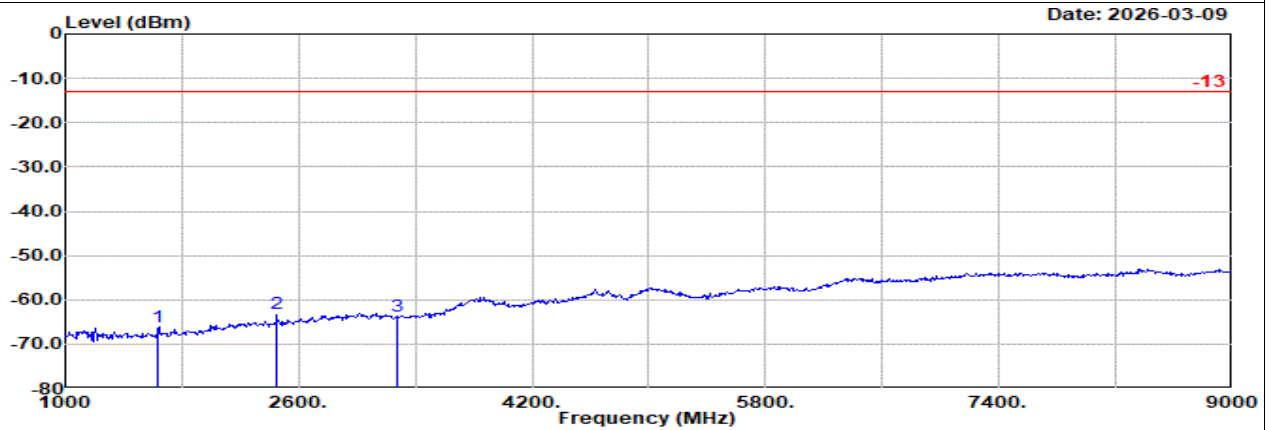

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 15M Ch164800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1635.00	-66.12	RMS		24.65	-24.36	1.07	-95.23	27.75	-13.00	-53.12		Vertical
2	2453.00	-63.15	RMS		26.77	-23.30	0.91	-95.23	27.70	-13.00	-50.15		Vertical
3	3270.00	-63.84	RMS		27.98	-22.74	1.05	-95.23	25.10	-13.00	-50.84		Vertical




Ant. 2+0

Part 90S Mode 5


EN-DC B7+n26 10M + 15M Ch21100 1RB0 QPSK + Ch164800 1RB1 BPSK

M

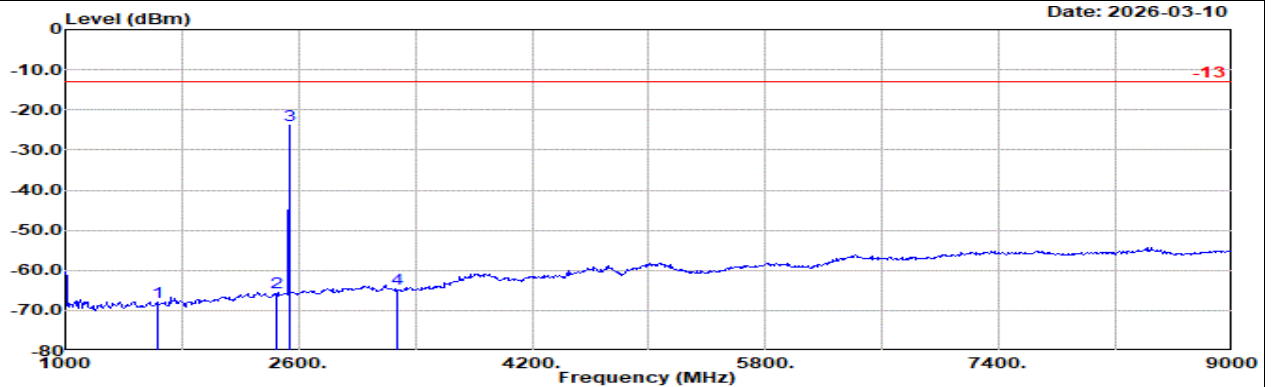

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B7 10M Ch21100 1RB0 QPSK
: NR SA n26 15M Ch164800 1RB1 BPSK
: #3 is fundamental signal which can be ignored.

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	dB	dB	dB	dBuV	dBm	dB	
1	1635.00	-67.91 RMS	24.65	-25.15	1.07	-95.23	26.75	-13.00	-54.91	Horizontal
2	2453.00	-65.40 RMS	26.77	-24.24	0.91	-95.23	26.39	-13.00	-52.40	Horizontal
3	2536.00	-23.81 RMS	26.96	-24.14	0.90	-95.23	67.70	-----	-----	Horizontal
4	3270.00	-64.56 RMS	27.98	-23.81	1.05	-95.23	25.45	-13.00	-51.56	Horizontal

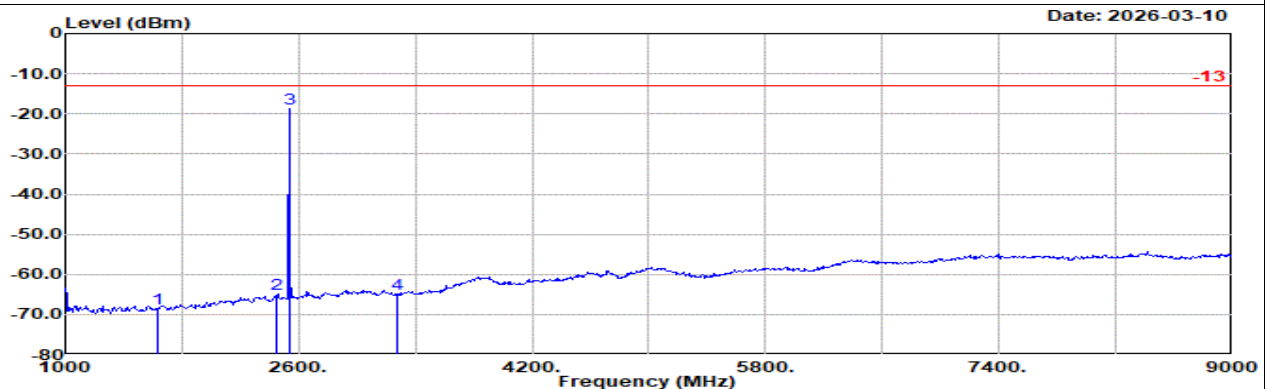

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B7 10M Ch21100 1RB0 QPSK
: NR SA n26 15M Ch164800 1RB1 BPSK
: #3 is fundamental signal which can be ignored.

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	dB	dB	dB	dBuV	dBm	dB	
1	1635.00	-68.39 RMS	24.65	-25.15	1.07	-95.23	26.27	-13.00	-55.39	Vertical
2	2453.00	-64.86 RMS	26.77	-24.24	0.91	-95.23	26.93	-13.00	-51.86	Vertical
3	2536.00	-18.79 RMS	26.96	-24.14	0.90	-95.23	72.72	-----	-----	Vertical
4	3270.00	-65.01 RMS	27.98	-23.81	1.05	-95.23	25.00	-13.00	-52.01	Vertical




Ant. 0

Part 90R Mode 6

NR SA n14 5M Ch158100 1RB1 BPSK

L

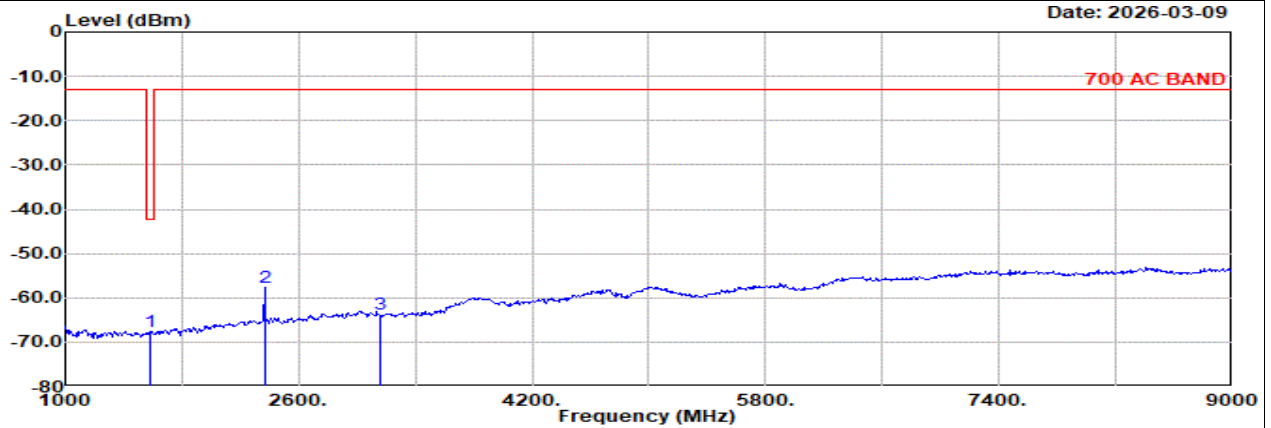


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n14 5M Ch158100 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	1577.00	-67.60	RMS	24.50	-24.44	1.06	-95.23	26.51	-42.15	-25.45	Horizontal
2	2366.00	-57.81	RMS	26.90	-23.43	0.91	-95.23	33.04	-13.00	-44.81	Horizontal
3	3154.00	-63.76	RMS	28.00	-22.65	1.02	-95.23	25.10	-13.00	-50.76	Horizontal

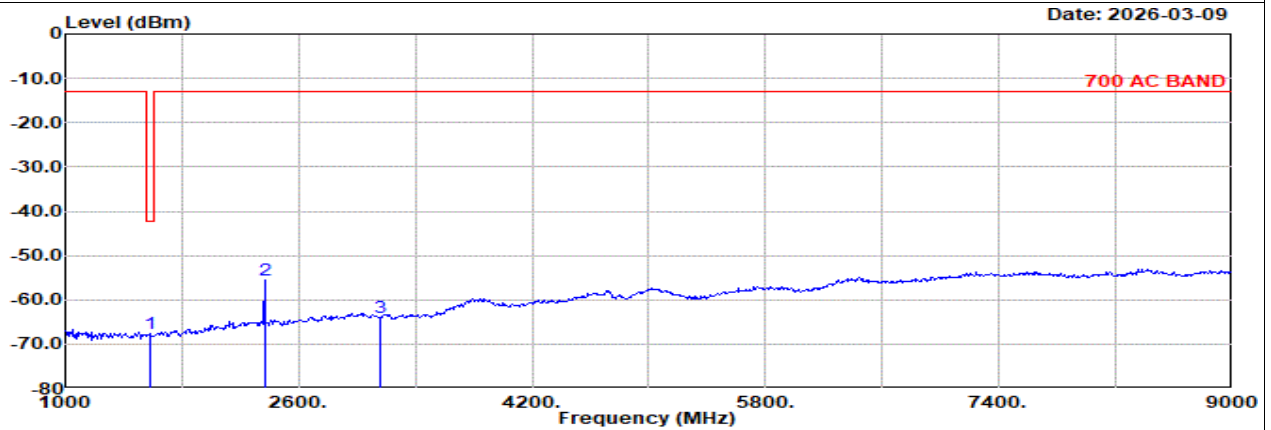

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n14 5M Ch158100 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	1577.00	-67.59	RMS	24.50	-24.44	1.06	-95.23	26.52	-42.15	-25.44	Vertical
2	2366.00	-55.67	RMS	26.90	-23.43	0.91	-95.23	35.18	-13.00	-42.67	Vertical
3	3154.00	-63.86	RMS	28.00	-22.65	1.02	-95.23	25.00	-13.00	-50.86	Vertical




Ant. 0

Part 90R Mode 6

NR SA n14 5M Ch158600 1RB1 BPSK

M

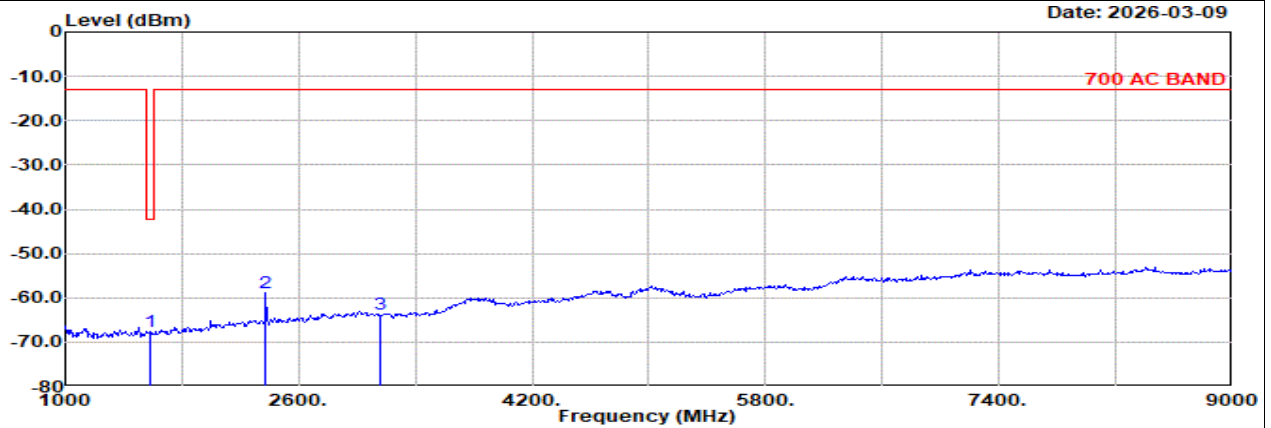


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1582.00	-67.73	RMS		24.52	-24.43	1.06	-95.23	26.35	-42.15	-25.58		Horizontal
2	2373.00	-58.91	RMS		26.84	-23.41	0.91	-95.23	31.98	-13.00	-45.91		Horizontal
3	3164.00	-63.65	RMS		28.00	-22.66	1.02	-95.23	25.22	-13.00	-50.65		Horizontal

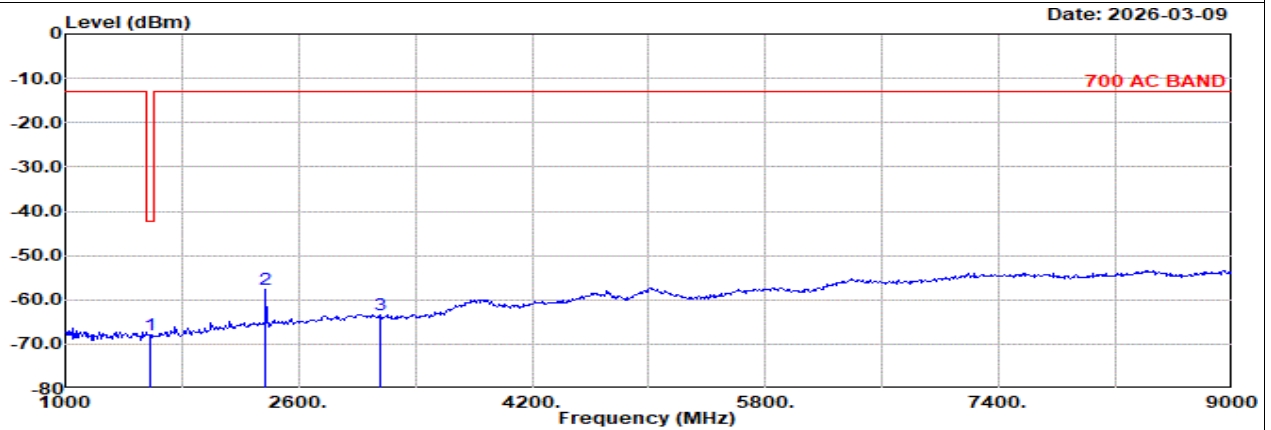

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1582.00	-67.80	RMS		24.52	-24.43	1.06	-95.23	26.28	-42.15	-25.65		Vertical
2	2373.00	-57.60	RMS		26.84	-23.41	0.91	-95.23	33.29	-13.00	-44.60		Vertical
3	3164.00	-63.46	RMS		28.00	-22.66	1.02	-95.23	25.41	-13.00	-50.46		Vertical




Ant. 0

Part 90R Mode 6

NR SA n14 5M Ch159100 1RB1 BPSK

H

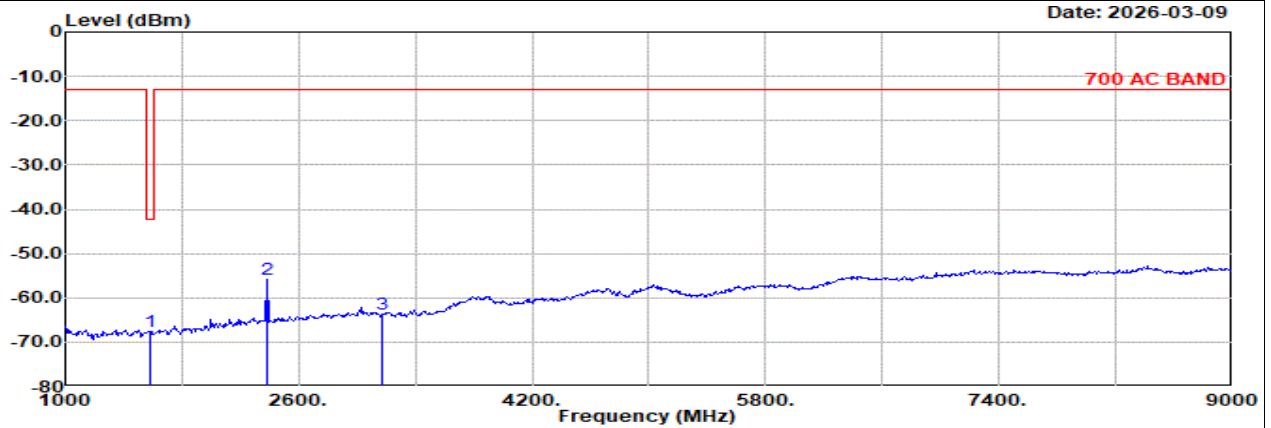


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n14 5M Ch159100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1587.00	-67.50	RMS		24.57	-24.42	1.06	-95.23	26.52	-42.15	-25.35		Horizontal
2	2381.00	-55.77	RMS		26.69	-23.40	0.91	-95.23	35.26	-13.00	-42.77		Horizontal
3	3174.00	-63.66	RMS		28.00	-22.67	1.03	-95.23	25.21	-13.00	-50.66		Horizontal

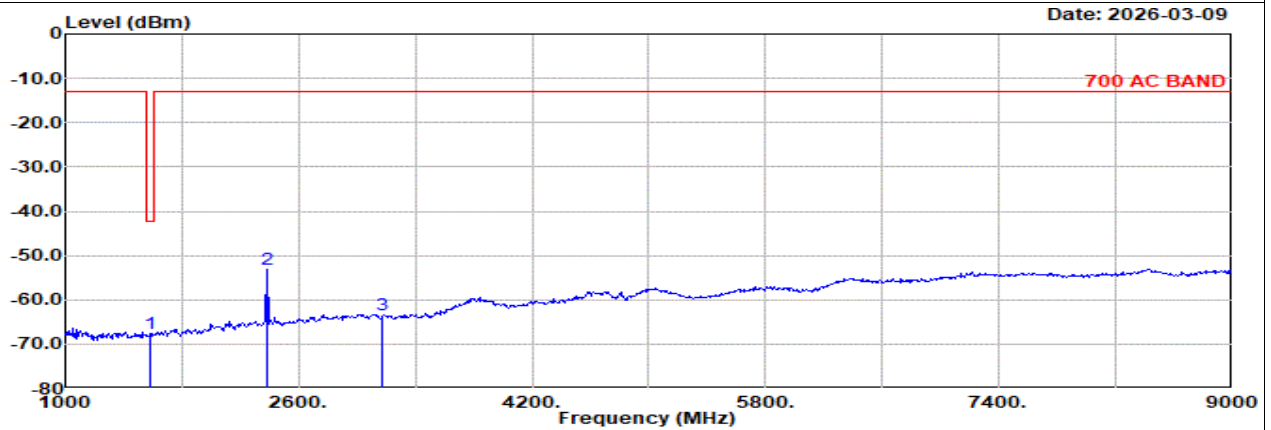

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n14 5M Ch159100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1587.00	-67.52	RMS		24.57	-24.42	1.06	-95.23	26.50	-42.15	-25.37		Vertical
2	2381.00	-53.16	RMS		26.69	-23.40	0.91	-95.23	37.87	-13.00	-40.16		Vertical
3	3174.00	-63.31	RMS		28.00	-22.67	1.03	-95.23	25.56	-13.00	-50.31		Vertical




Ant. 0

Part 90R Mode 7


NR SA n14 10M Ch158600 1RB1 BPSK

M

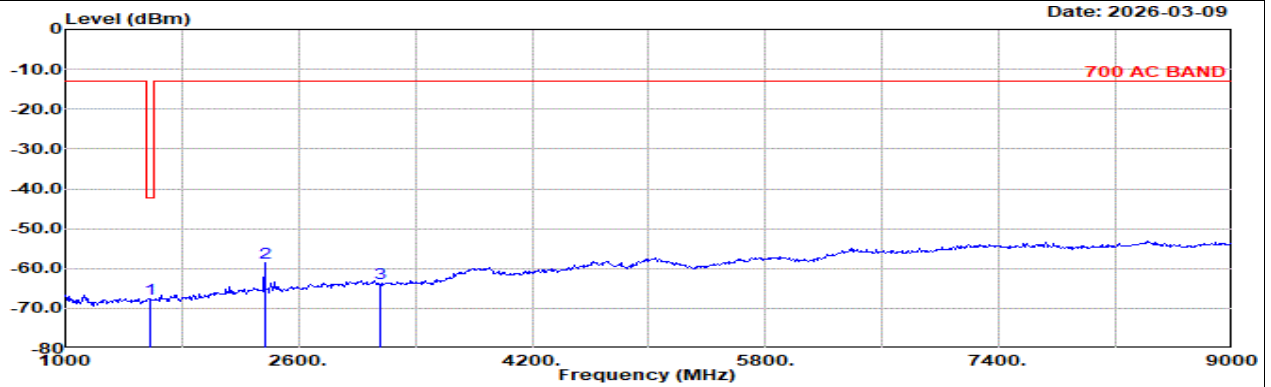

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: NR SA n14 10M Ch158600 1RB1 BPSK
: #1 is fundamental signal which can be ignored.
: #2 is fundamental signal which can be ignored.
: #3 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1578.00	-67.53	RMS		24.50	-24.43	1.06	-95.23	26.57	-42.15	-25.38 Horizontal
2	2366.00	-58.67	RMS		26.90	-23.43	0.91	-95.23	32.18	-13.00	-45.67 Horizontal
3	3155.00	-63.84	RMS		28.00	-22.65	1.02	-95.23	25.02	-13.00	-50.84 Horizontal

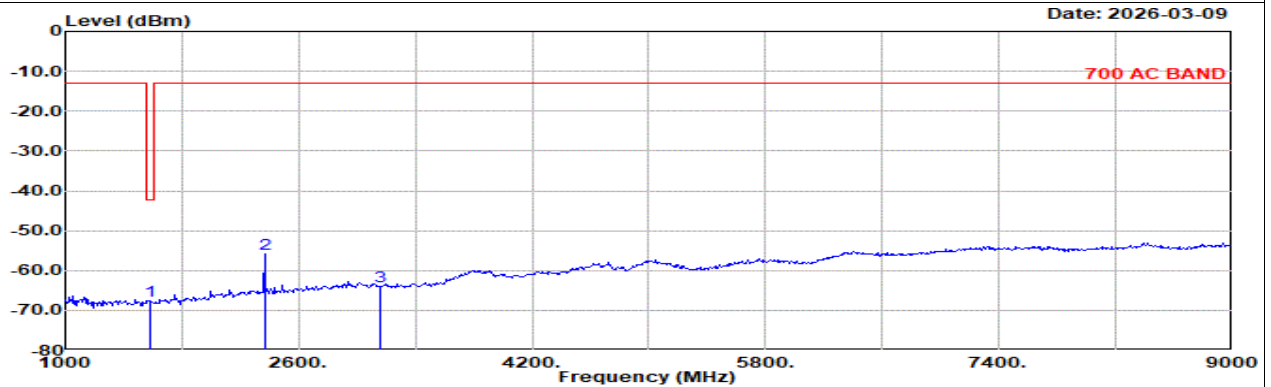

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical
: NR SA n14 10M Ch158600 1RB1 BPSK
: #1 is fundamental signal which can be ignored.
: #2 is fundamental signal which can be ignored.
: #3 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1578.00	-67.50	RMS		24.50	-24.43	1.06	-95.23	26.60	-42.15	-25.35 Vertical
2	2366.00	-55.96	RMS		26.90	-23.43	0.91	-95.23	34.89	-13.00	-42.96 Vertical
3	3155.00	-63.87	RMS		28.00	-22.65	1.02	-95.23	24.99	-13.00	-50.87 Vertical




Ant. 1

Part 90R Mode 8

NR SA n14 5M Ch158600 1RB1 BPSK

M

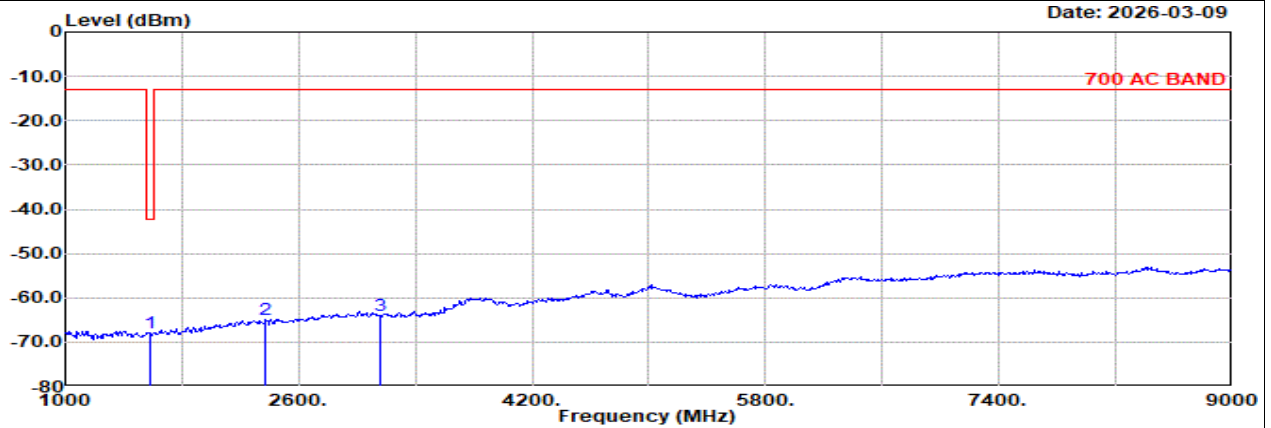


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1582.00	-67.82	RMS	24.52	-24.43	1.06	-95.23	26.26	-42.15	-25.67
2	2373.00	-65.00	RMS	26.84	-23.41	0.91	-95.23	25.89	-13.00	-52.00
3	3164.00	-63.92	RMS	28.00	-22.66	1.02	-95.23	24.95	-13.00	-50.92

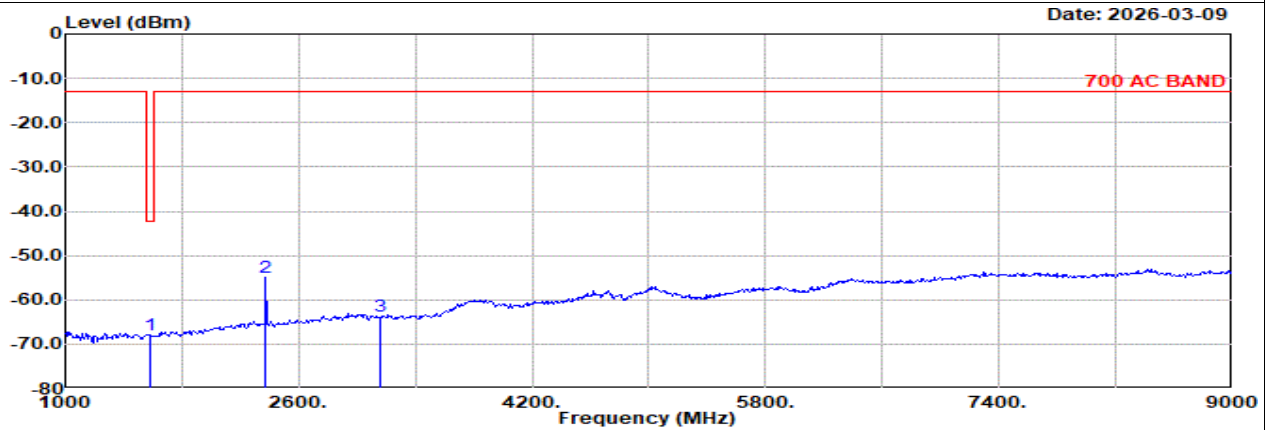

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n14 5M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1582.00	-67.83	RMS	24.52	-24.43	1.06	-95.23	26.25	-42.15	-25.68
2	2373.00	-54.84	RMS	26.84	-23.41	0.91	-95.23	36.05	-13.00	-41.84
3	3164.00	-63.70	RMS	28.00	-22.66	1.02	-95.23	25.17	-13.00	-50.70




Ant. 1

Part 90R Mode 9

NR SA n14 10M Ch158600 1RB1 BPSK

M

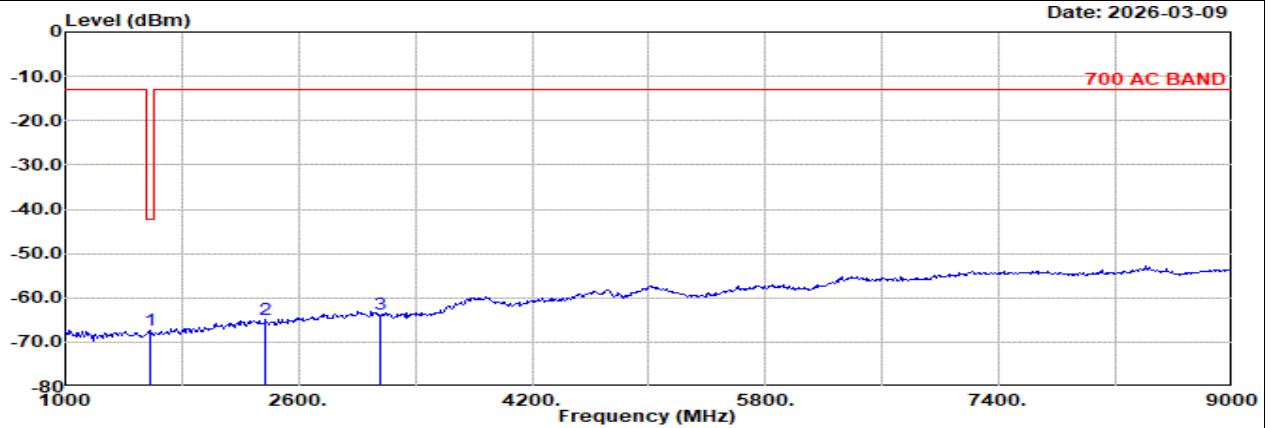


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n14 10M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1578.00	-67.19	RMS	24.50	-24.43	1.06	-95.23	26.91	-42.15	-25.04	Horizontal
2	2366.00	-65.02	RMS	26.90	-23.43	0.91	-95.23	25.83	-13.00	-52.02	Horizontal
3	3155.00	-63.67	RMS	28.00	-22.65	1.02	-95.23	25.19	-13.00	-50.67	Horizontal

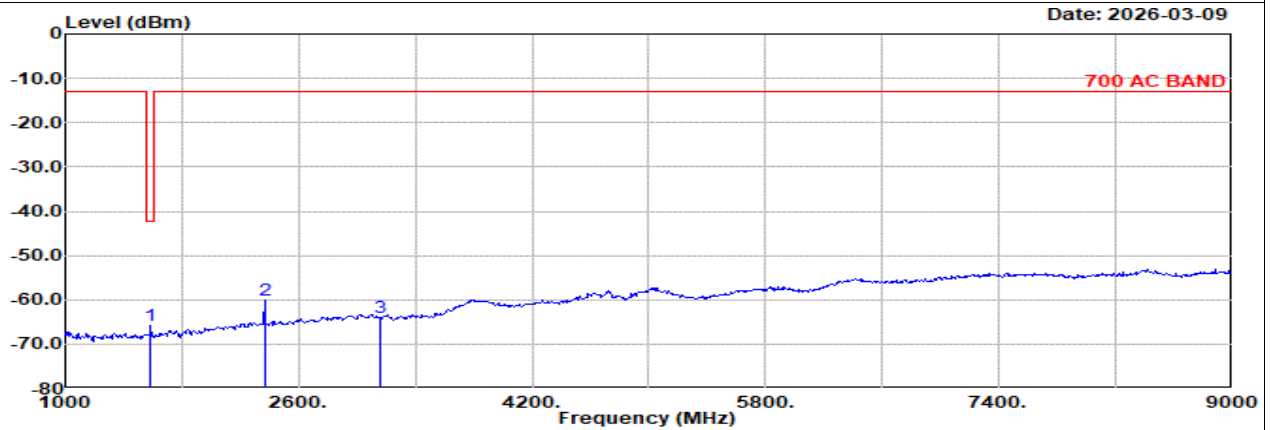

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n14 10M Ch158600 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1578.00	-65.78	RMS	24.50	-24.43	1.06	-95.23	28.32	-42.15	-23.63	Vertical
2	2366.00	-60.19	RMS	26.90	-23.43	0.91	-95.23	30.66	-13.00	-47.19	Vertical
3	3155.00	-63.88	RMS	28.00	-22.65	1.02	-95.23	24.98	-13.00	-50.88	Vertical




Ant. 0+2

Part 27D Mode 20


EN-DC B5+n30 10M + 10M Ch20525 1RB0 QPSK + Ch462000 1RB1 BPSK

M

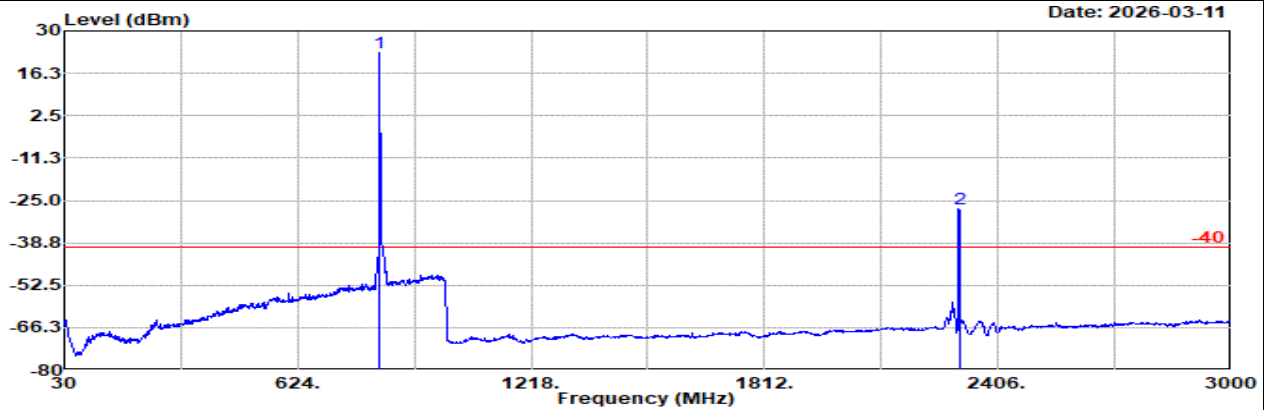

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: NR n30 10M Ch462000 1RB1 BPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	832.19	22.89	RMS	28.60	5.03	0.00	-95.23	84.49	-40.00	62.89	Horizontal
2	2310.00	-27.83	RMS	26.90	-24.43	1.05	-95.23	63.88	-40.00	12.17	Horizontal

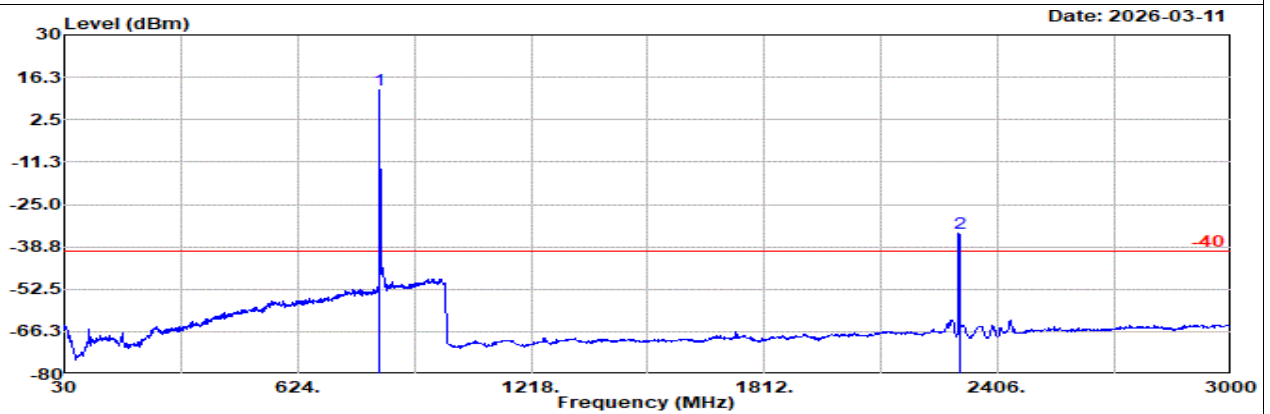

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: NR n30 10M Ch462000 1RB1 BPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	832.19	12.31	RMS	28.60	5.03	0.00	-95.23	73.91	-40.00	52.31	Vertical
2	2310.00	-34.19	RMS	26.90	-24.43	1.05	-95.23	57.52	-40.00	5.81	Vertical