


TECHNICAL DATE**2.4G Antenna Assembly****1. Electrical Specifications**

1.1 Frequency Ranges	2.4~2.5 GHz &5.15~5.85 GHz
1.2 Impedance	50Ω
1.3 VSWR	2.0max
1.4 Return Loss	-10dBmax

2. Physical Properties

2.1 PIFA Type	DIP
2.2 ANT Metal	Brass
2.3 Operating Temperature	-20℃ ~ +65℃
2.4 Storage Temperature	-30℃ ~ +75℃

REV	DATE	DESCRIPTION
A0	9/23/2017	New Issue

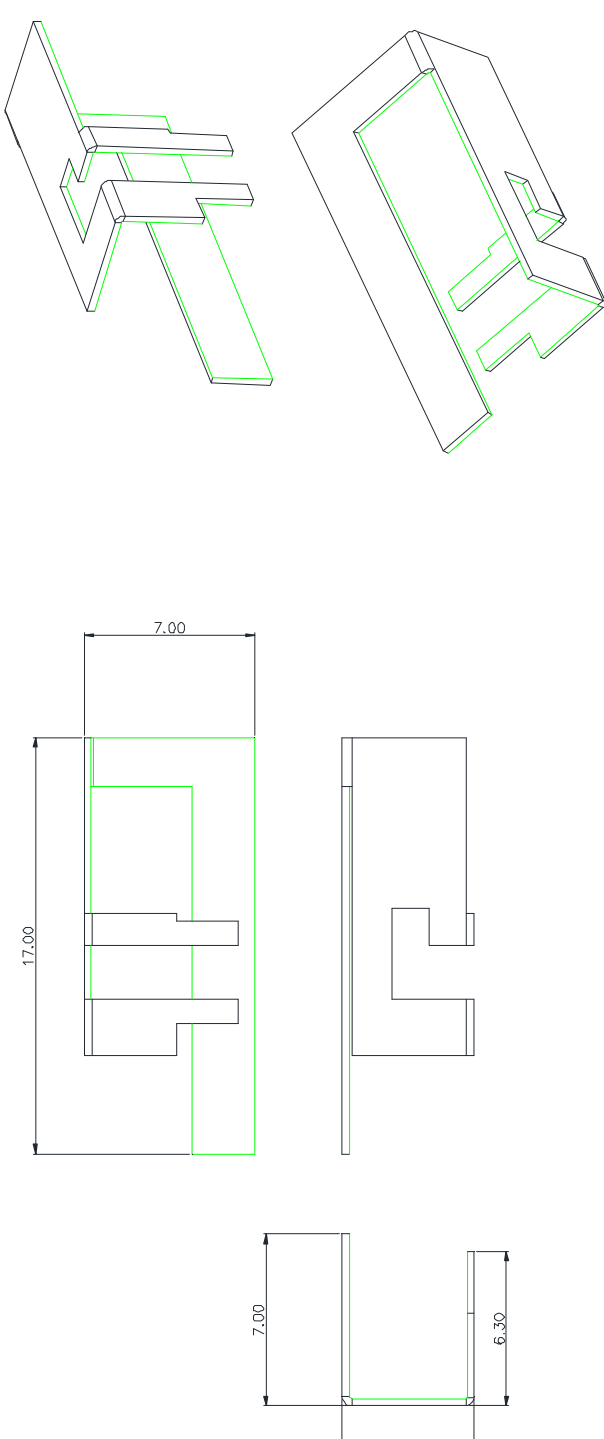

材质: 黄铜 厚度0.3mm






XX.	±5	APPROVED	CUSTOMER :
X.	±3.0	CHECKED	PART NO : T5
.X	±1.0		PART NAME: 2.4&5G Antenna
.XX	±0.5		SOANT P/NO: STPPAI75470NNA001
.XXX	±0.1	DRAWING	REV UNIT FILE:
		王少荣	A1 m/m SHEET: 1/1

CUSTOMER'S SIGNATURE	APPROVED	CHECKED	DRAWING
			王少荣


SOANT COMMUNICATION	苏州硕天通讯器材有限公司	Suzhou Soant Communication Equipment Co., Ltd
THIS DRAWING, AND IT'S INHERENT DESIGN CONCEPTS, ARE THE PROPERTY OF Soant AND AS SUCH MAY NOT BE COPIED, REPRODUCED OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF Soant.		

测试报告

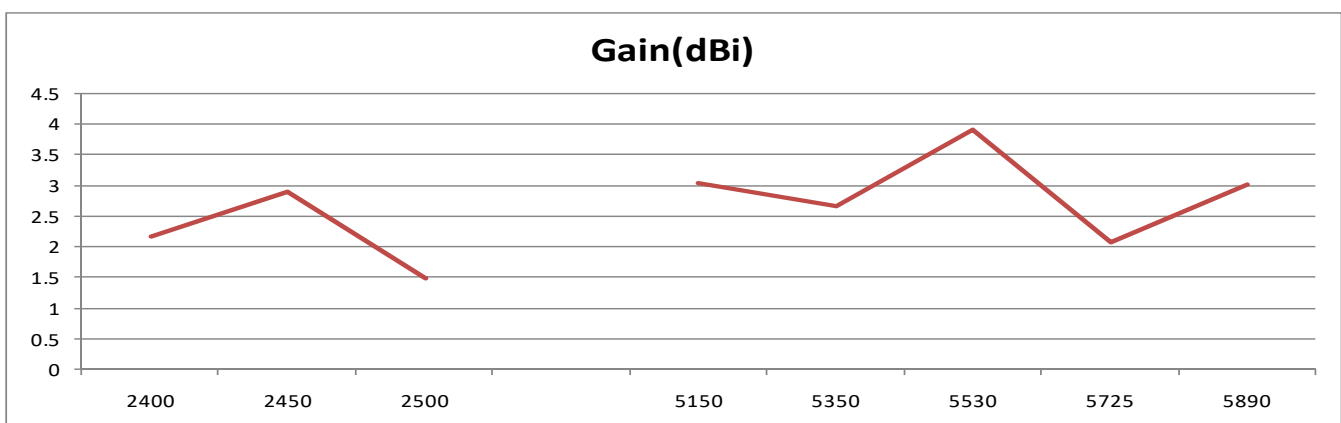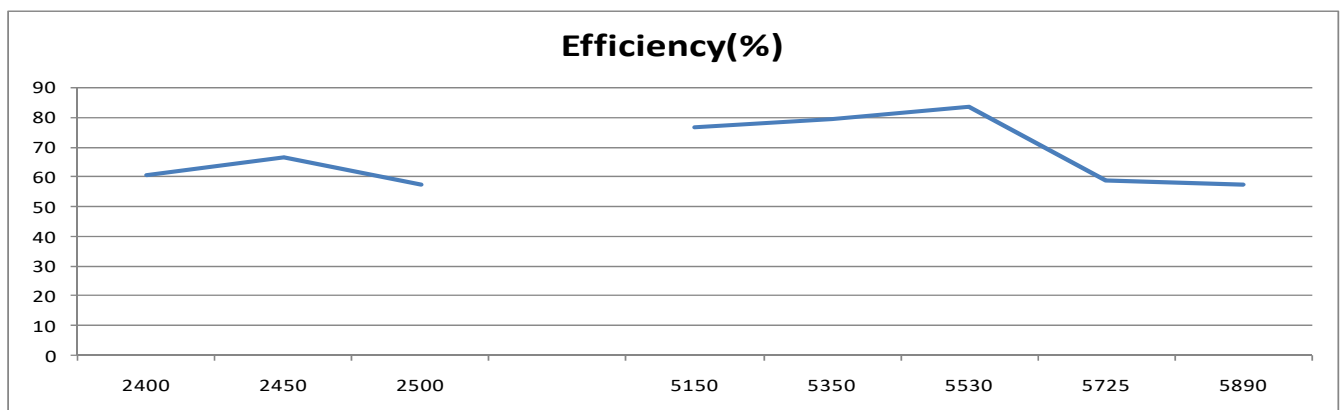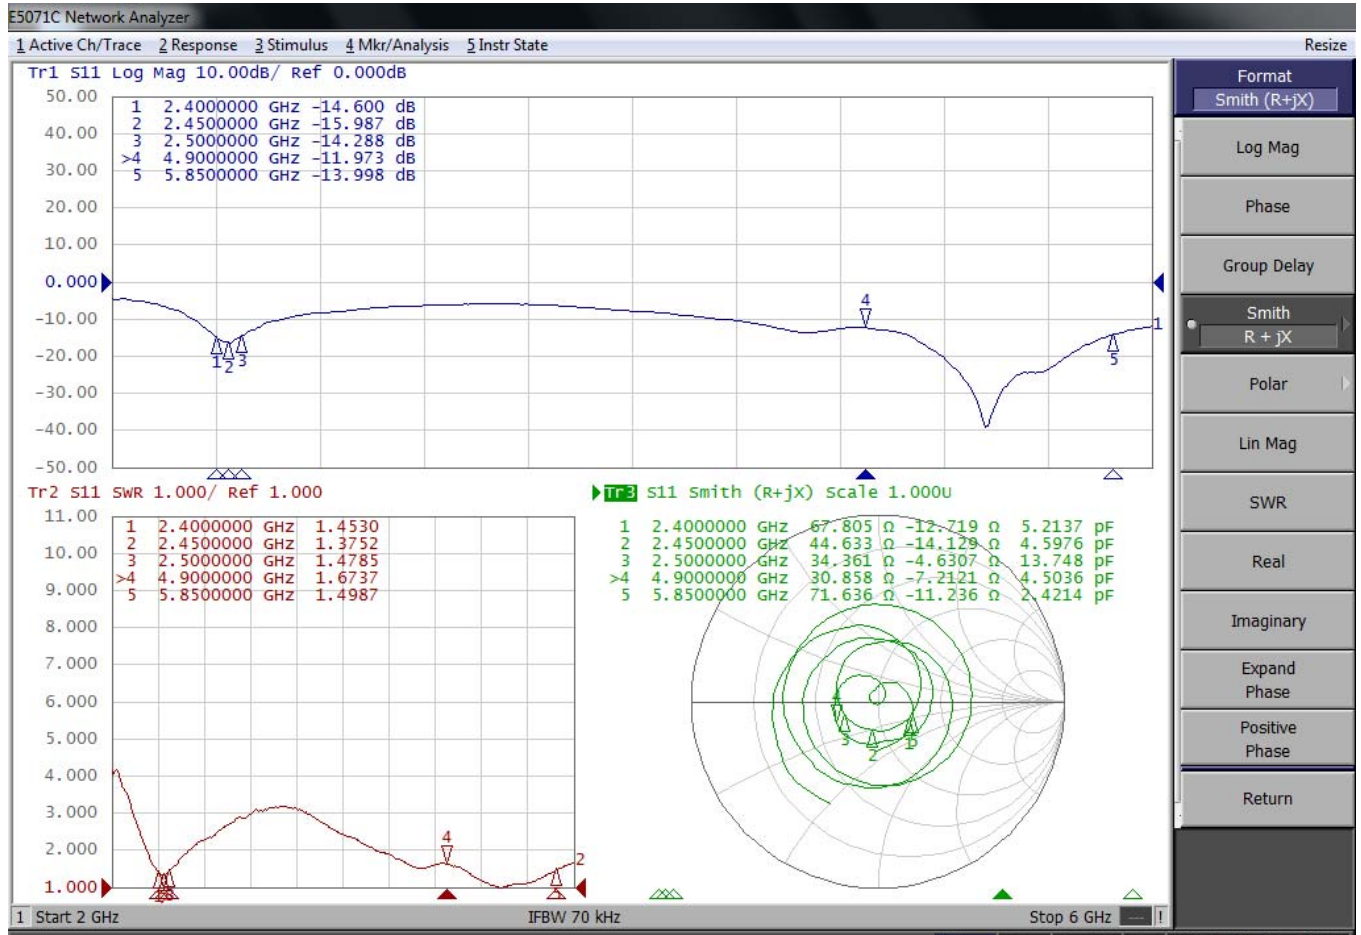






- **Gain (dBi)**
Frequency = 2400 MHz

dBm	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	-0.770805	2.79881	1.215649
V-Pol. (Peak.)	-10.47874	-6.233237	-4.566043
H+V. (Peak.)	-0.743336	3.178703	1.603517
H-Pol. (Avg.)	-4.604836	-2.173149	-3.329117
V-Pol. (Avg.)	-16.13405	-10.458495	-9.849743
H+V. (Avg.)	-4.309699	-1.572176	-2.455522
Angle	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	180	210	150
V-Pol. (Peak.)	90	180	180
H+V. (Peak.)	180	210	150

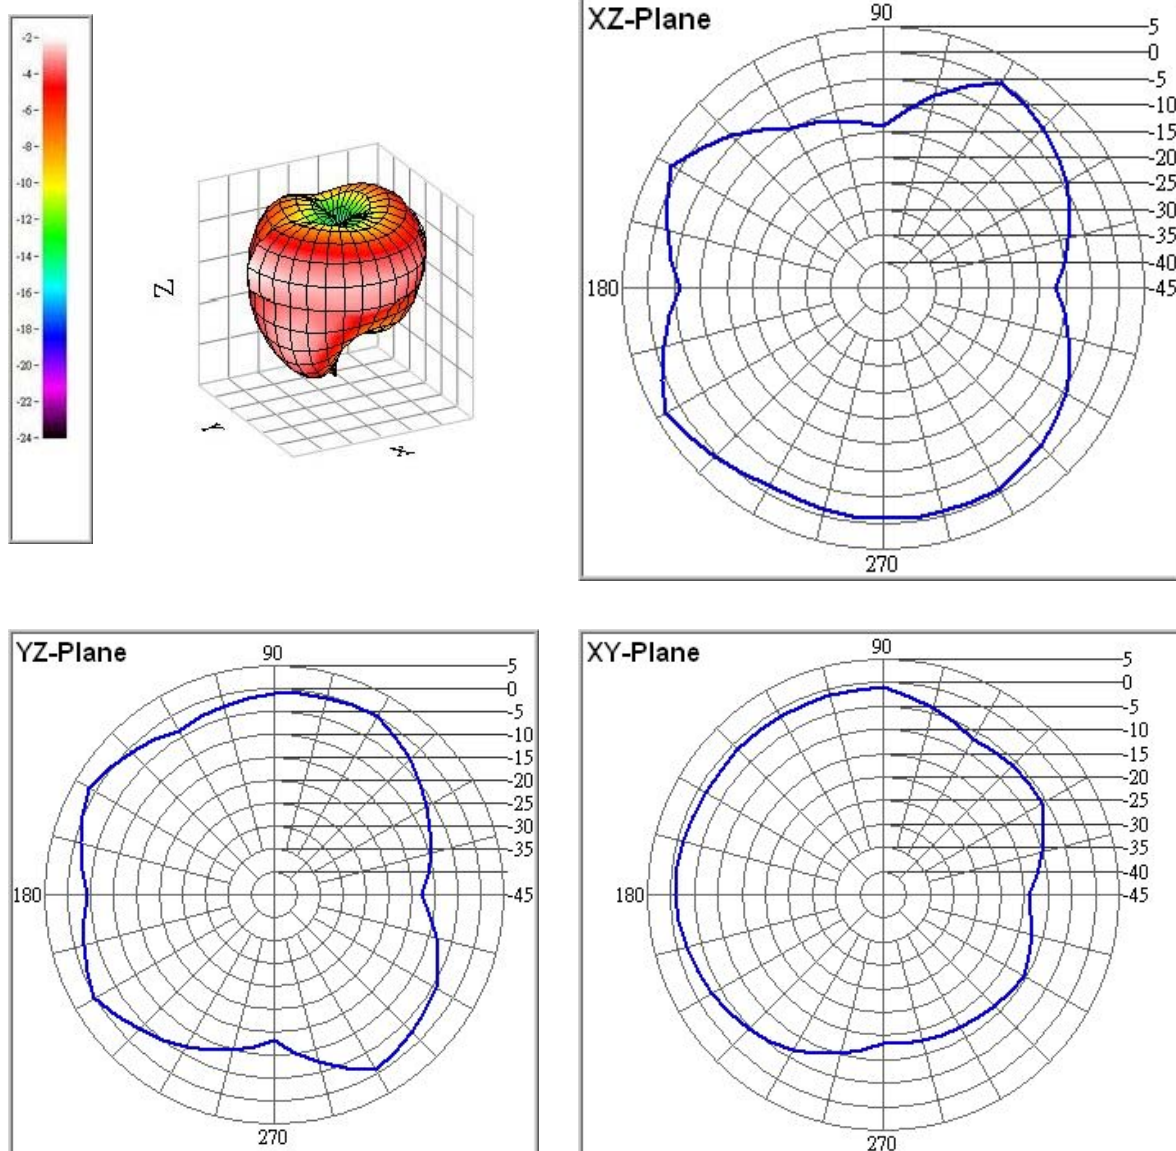

- **Gain (dBi)**
Frequency = 2450 MHz





dBm	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	-2.3558	2.949207	1.14153
V-Pol. (Peak.)	-8.330786	-4.977243	-4.641073
H+V. (Peak.)	-2.11872	3.56553	2.159285
H-Pol. (Avg.)	-6.533493	-2.013853	-3.427101
V-Pol. (Avg.)	-15.295157	-8.73797	-8.531524
H+V. (Avg.)	-5.991215	-1.176633	-2.25865
Angle	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	150	210	150
V-Pol. (Peak.)	90	60	150
H+V. (Peak.)	150	210	150

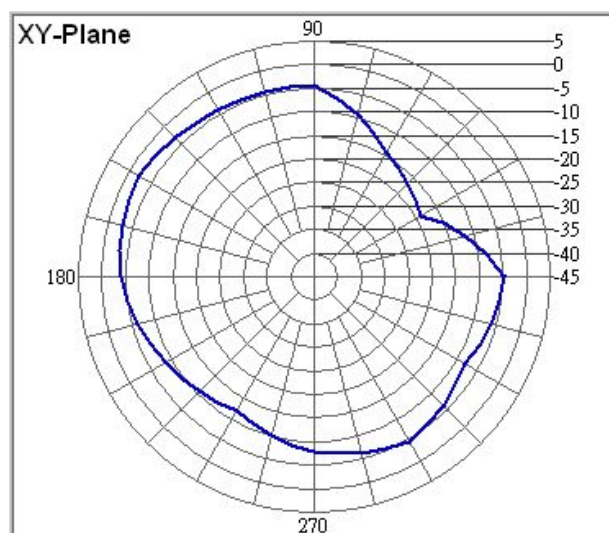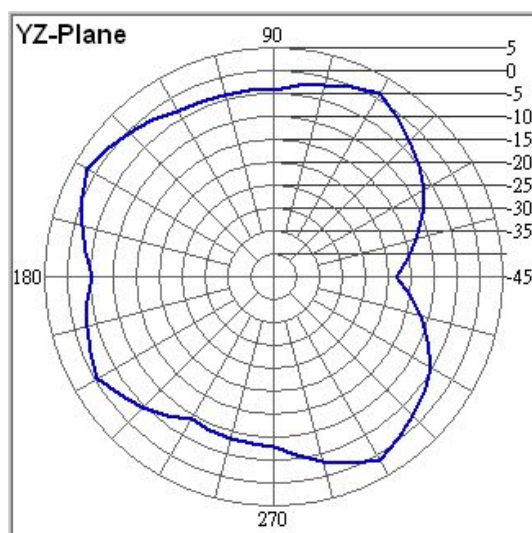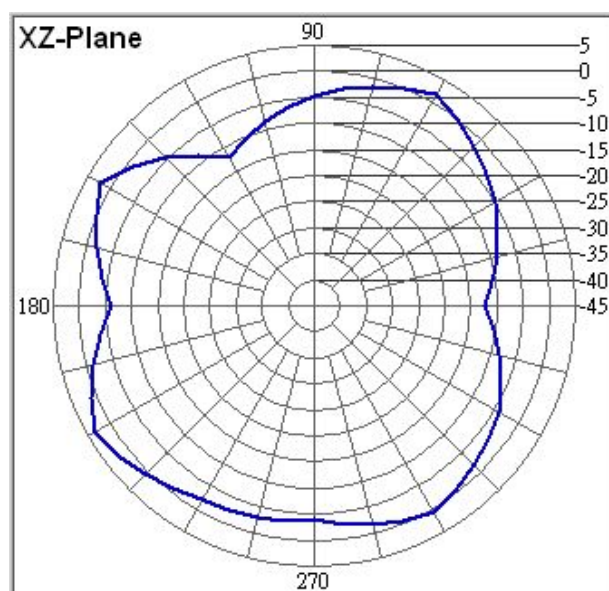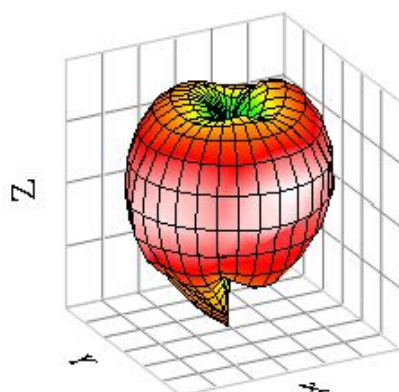

➤ **Gain (dBi)**






Frequency = 2500 MHz

dBm	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	0.85666	2.033017	1.375546
V-Pol. (Peak.)	-12.2741	-4.046584	-5.192489
H+V. (Peak.)	0.952032	2.485806	1.750535
H-Pol. (Avg.)	-4.528664	-2.572395	-3.782813
V-Pol. (Avg.)	-15.968826	-9.738917	-10.493951
H+V. (Avg.)	-4.227621	-1.809557	-2.943315
Angle	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	0	210	60
V-Pol. (Peak.)	240	150	150
H+V. (Peak.)	0	210	60

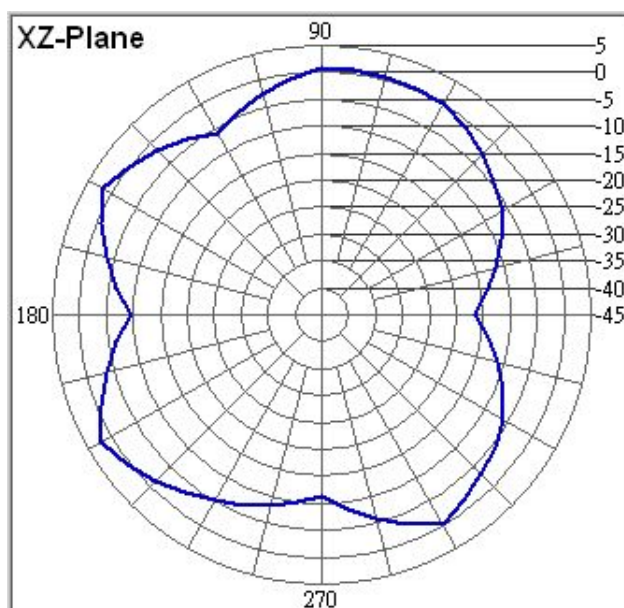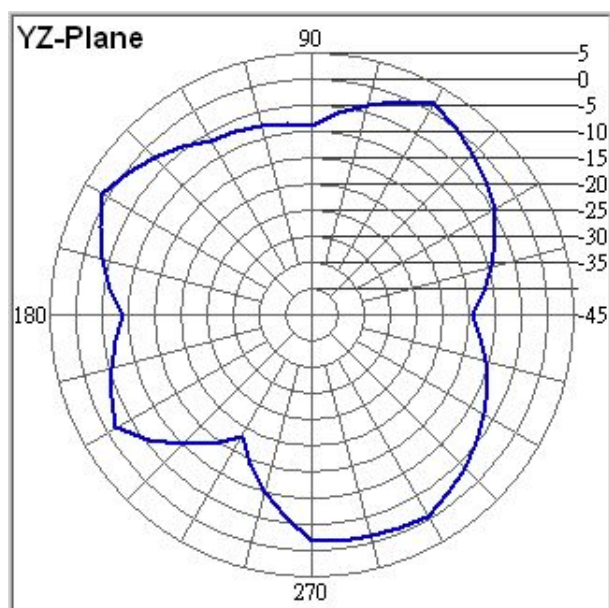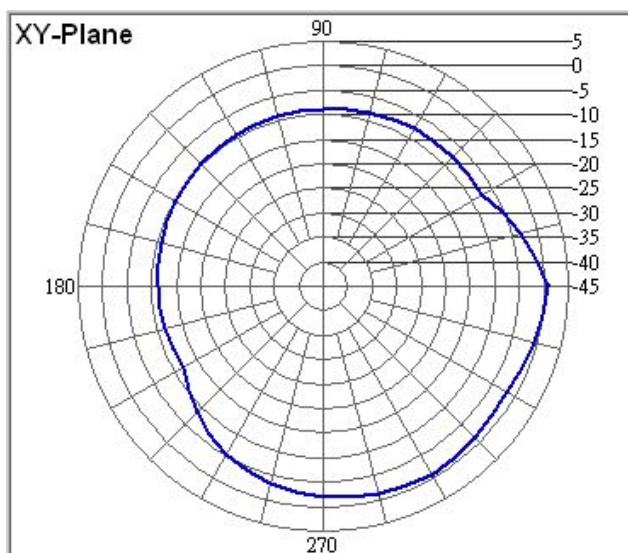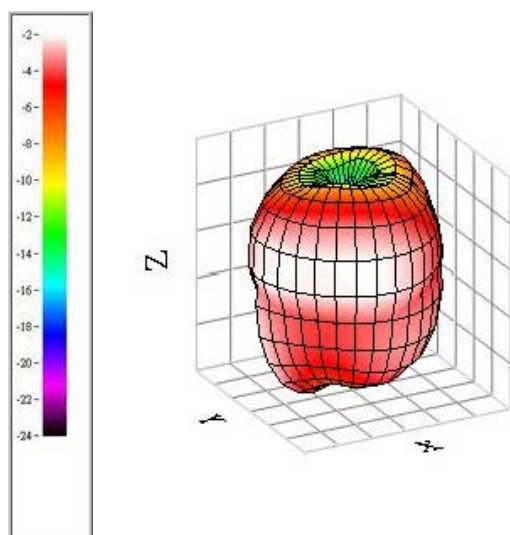

- **Gain (dBi)**
Frequency = 5150 MHz

dBm	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	2.561845	2.655663	3.889432
V-Pol. (Peak.)	-9.688577	-7.766725	-8.736322
H+V. (Peak.)	2.585792	2.745374	4.029271
H-Pol. (Avg.)	-1.38243	-0.749889	-1.263008
V-Pol. (Avg.)	-12.965185	-12.07806	-11.82863
H+V. (Avg.)	-1.090791	-0.441255	-0.897563
Angle	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	0	150	150
V-Pol. (Peak.)	90	120	330
H+V. (Peak.)	0	150	150

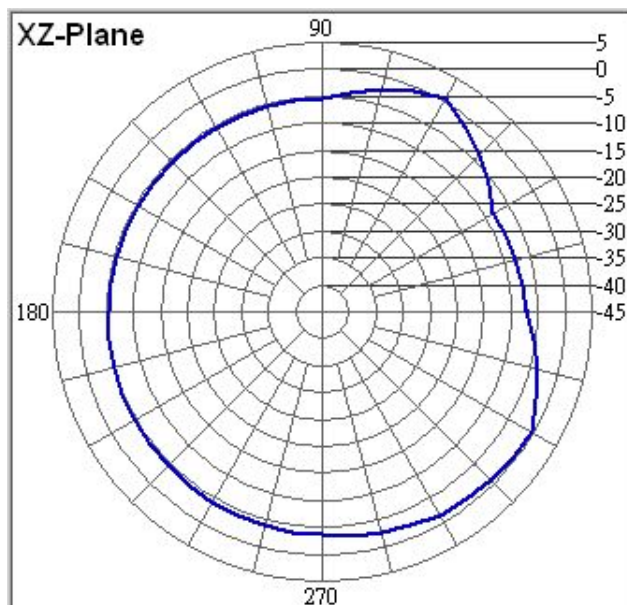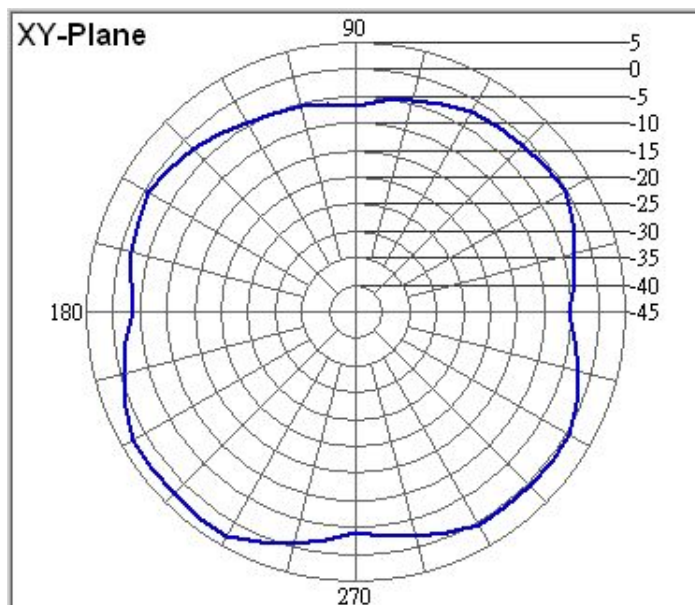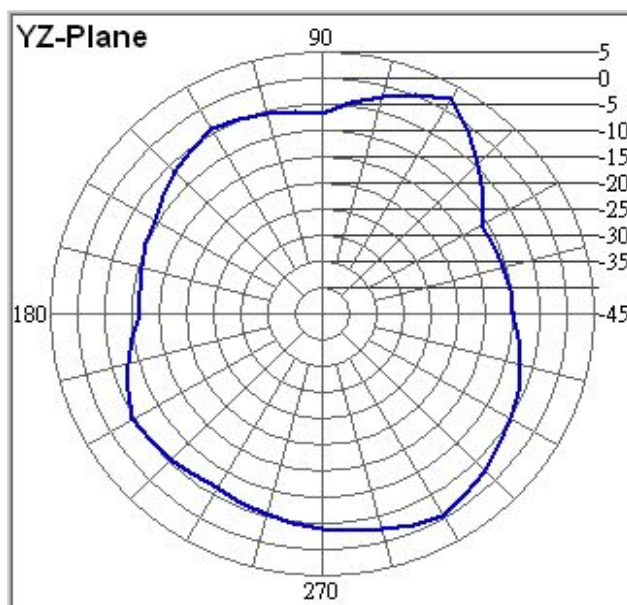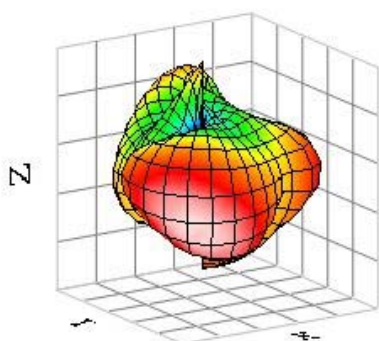

➤ Gain (dBi)

Frequency = 5800 MHz

dBm	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	3.110633	2.569503	1.621249
V-Pol. (Peak.)	-4.828294	-6.191278	-3.234857
H+V. (Peak.)	3.757959	2.614437	2.508135
H-Pol. (Avg.)	-0.160437	-2.311785	-2.148934
V-Pol. (Avg.)	-10.861328	-10.005962	-8.140699
H+V. (Avg.)	0.194246	-1.629733	-1.174052
Angle	XY-Plane	XZ-Plane	YZ-Plane
H-Pol. (Peak.)	210	90	60
V-Pol. (Peak.)	210	150	240
H+V. (Peak.)	210	90	240

