

HEARING AID COMPATIBILITY T-COIL TEST REPORT

FCC ID : A4RGB00H
Equipment : Phone
Model Name : GBC0H
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC 47 CFR §20.19
ANSI C63.19-2019

The product was received on Nov. 17, 2025 and testing was started from Dec. 23, 2025 and completed on May. 14, 2026. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI C63.19-2019 / 47 CFR Part 20.19 and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. Air Interface and Operating Mode.....	6
5. T-Coil coupling mode requirements	8
5.1 T-Coil coupling qualifying field strengths	8
5.2 Frequency Response	8
5.3 Desired ABM signal, undesired ABM field qualification requirements	9
5.4 T-Coil measurement and reference plane	10
6. Test procedure for T-Coil signal	11
7. Test Equipment List	17
8. T-Coil testing for CMRS Voice.....	18
8.1 GSM Evaluation Results.....	18
8.2 UMTS Evaluation Results.....	19
8.3 VoLTE Evaluation Results	20
8.4 VoNR Evaluation Results	21
8.5 VoWiFi Evaluation Results	22
9. T-Coil testing for OTT Voice Calling	23
10. Uncertainty Assessment	25
11. References.....	26

Appendix A. Plots of T-Coil Measurement
Appendix B. DASy Calibration Certificate
Appendix C. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
HA5N0803-01B	Rev. 01	Initial issue of report	Apr. 08, 2026
HA5N0803-01B	Rev. 02	Update section 8.4 and appendix A	May. 14, 2026



1. General Information

Product Feature & Specification	
Applicant Name	Google LLC
Equipment Name	Phone
Model Name	GBC0H
FCC ID	A4RGBC0H
S/N	61031FDDV000B6, 5A231FDDV0000G
Test Results	Pass
Frequency Band	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13: 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz 5G NR n258 : 24.25 GHz~24.45 GHz, 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz NTN NB IoT B23: 2000 MHz ~2020 MHz NTN NB IoT B255: 1626.5 MHz ~ 1660.5 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz~6525 MHz, 6525 MHz~6875 MHz, 6875 MHz~7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz WPC: 110 kHz ~ 148.5 kHz(Rx) UWB: 6489.6 MHz, 7987.2 MHz Thread: 2405 MHz ~ 2480 MHz

Mode	GSM/GPRS/EGPRS UMTS: RMC/AMR 12.2Kbps, HSDPA, HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM NTN: BPSK, QPSK 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE/CS NFC: ASK WPC: ASK UWB: BPM-BPSK/HPSK Thread: QPSK
-------------	--

Reviewed by: Jason Wang

Report Producer: Carlie Tsai

2. Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3786) and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan TEL: +886-3-327-0838 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.: SAR15-HY

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2019
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D02 T Coil testing v04
- FCC KDB 285076 D03 HAC FAQ v01r07

4. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power State for HAC Compliance
GSM	GSM850	VO	Yes	WLAN, BT, Thread	CMRS Voice	Pmax
	GSM1900					
	EDGE850	VD	Yes		Google Meet ⁽¹⁾	
	EDGE1900					
UMTS	Band 2	VO	Yes	WLAN, BT, Thread	CMRS Voice	Pmax
	Band 4					
	Band 5					
	HSPA	VD	Yes		Google Meet ⁽¹⁾	
LTE	Band 2	VD	Yes	5G NR, WLAN, BT, Thread	VoLTE / Google Meet ⁽¹⁾	Pmax
	Band 4					
	Band 5					
	Band 7					
	Band 12					
	Band 13					
	Band 14					
	Band 17					
	Band 25					
	Band 26					
	Band 30					
	Band 38					
	Band 41					
	Band 48					
	Band 66					
	Band 71					
5G NR	n2	VD	Yes	LTE, WLAN, BT, Thread	VoNR / Google Meet ⁽¹⁾	Pmax
	n5					
	n7					
	n12					
	n13					
	n14					
	n25					
	n26					
	n30					
	n38					
	n41					
	n48					
	n66					
	n70					
	n71					
	n77					
	n78					
	n258	VD	No ⁽²⁾		Google Meet ⁽¹⁾	NA
	n260					
	n261					

Wi-Fi	2450	VD	Yes	GSM, WCDMA, LTE, 5G NR, 5G/6GHz WLAN	VoWiFi / Google Meet ⁽¹⁾	Pmax
	5200			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT, Thread		
	5300					
	5500					
	5800 / 5900					
	U-NII 5	VD	Yes ⁽³⁾	GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT, Thread	VoWiFi / Google Meet ⁽¹⁾	Pmax
	U-NII 6		No ⁽²⁾			
	U-NII 7					
	U-NII 8					
NTN	B23	DT	No	NA	NA	NA
	B255					
BT / Thread	2450	DT	No	GSM, WCDMA, LTE, 5G NR, 5G/6GHz WLAN	NA	NA
UWB	6500/8000	DT	No	WWAN, WLAN, BT, Thread, NFC	NA	NA
NFC	13.56	DT	No	WWAN, WLAN, BT, Thread, UWB	NA	NA

Type Transport:

VO= Voice only

DT= Digital Transport only (no voice)

VD= CMRS and IP Voice Service over Digital Transport

Remark:

- For protocols not listed in Table 6.1 of ANSI C63.19:2019, the average speech level of -20 dBm0 should be used.
- The FR2 / U-NII 6/7/8 bands are above 6 GHz and were not evaluated because they are outside the current scope of ANSI C63.19 and FCC HAC regulations.
- The U-NII-5 band was evaluated for operations entirely below 6 GHz; operations above 6 GHz were not evaluated because they are outside the current scope of ANSI C63.19 and FCC HAC regulations.
- Because Google Meet features allow voice-only communication, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
- The device has similar frequencies in some bands (B12/17, 5/26, 4/66, 38/41, 77/78). Since the supported frequency spans for the smaller LTE and NR bands are completely covered by the larger LTE and NR bands, only the larger LTE and NR bands were required to be tested for hearing aid compliance.
- The product supports the TAS feature for WWAN and Wi-Fi operation; therefore, HAC testing for these technologies was conducted at the Pmax power level.



5. T-Coil coupling mode requirements

5.1 T-Coil coupling qualifying field strengths

When measured as specified in this standard, there are two groups of qualifying measurement points:

Primary group: A qualifying measurement point shall have its T-Coil signal, desired ABM signal, ≥ -18 dB(A/m) at 1 kHz, in a 1/3 octave band filter. These measurements shall be made with the WD operating at a reference input level as specified in Table 6.1. simultaneously, the qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m).


Secondary group: A qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m). This group inherently includes all the members of the primary group.

These levels are designed to be compatible with hearing aids that produce the same acoustic output level for either an acoustic input level of 65 dB SPL or a magnetic input level of -25 dB(A/m) (56.2 mA/m) 39 at either 1.0 kHz or 1.6 kHz. The hearing aid operational measurements are performed per ANSI S3.22-2014

5.2 Frequency Response


The frequency response of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this subclause, over the frequency range 300 Hz to 3 kHz.

Figure 6.4 and Figure 6.5 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

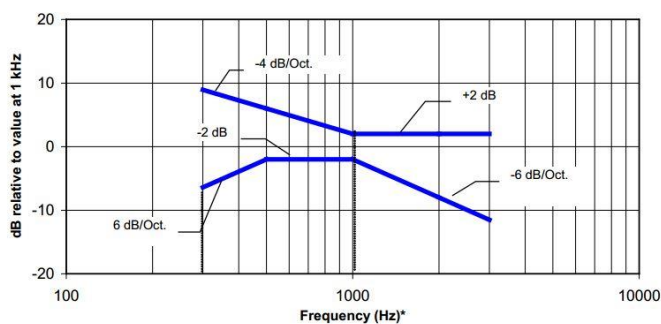

NOTE—Frequency response is between 300 Hz and 3 kHz.

Figure 6.4—Magnetic field frequency response for WDs with a maximum field ≤ -15 dB(A/m) at 1 kHz

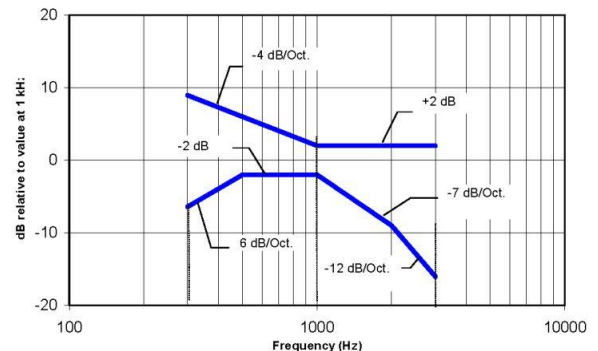

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 6.5—Magnetic field frequency response for WDs with a maximum field that exceeds -15 dB(A/m) at 1 kHz

5.3 Desired ABM signal, undesired ABM field qualification requirements

<Non-2G GSM operating modes>

The goal of this requirement is to ensure an adequate area where desired ABM signal is sufficiently strong to be heard clearly and a larger area where undesired ABM field is sufficiently low as to avoid undue annoyance. Qualifying measurement points shall fulfill the requirements of ANSI C63.19-2019 section 6.6.2; both the primary and secondary group requirements shall be met:

- The primary group shall include at least 75 measurement points
- The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.


Figure 6.6 is an example of a qualifying scan. The total number of primary group qualifying measurement points is 161, which is ≥ 75 . The total number of secondary group qualifying points is 536, which is ≥ 300

The secondary group has a longitudinal column of 26, which is ≥ 10 , and a transverse row also of 26 contiguous points, which is ≥ 15

<2G GSM operating modes>

If the 2G GSM operating mode(s) are selected for qualification, the qualifying measurement points shall fulfil the requirements of ANSI C63.19-2019 section 6.6.2; both the primary and secondary group requirements shall be met:


- The primary group shall include at least 25 measurement points
- The secondary group shall include at least 125 contiguous measurement points

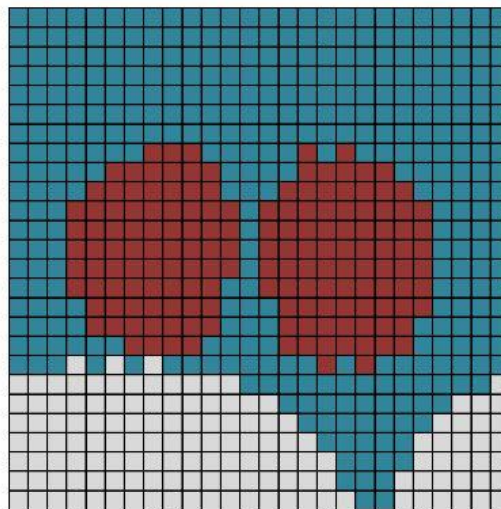


Red (primary group): AB desired ABM signal M1 ≥ -18 dB(A/m) and undesired ABM field ≤ -38 dB(A/m)
Blue and red (secondary group): undesired ABM field ≤ -38 dB(A/m)

Figure 6.6—An example of a qualifying desired ABM signal, undesired ABM field scan:

5.4 T-Coil measurement and reference plane

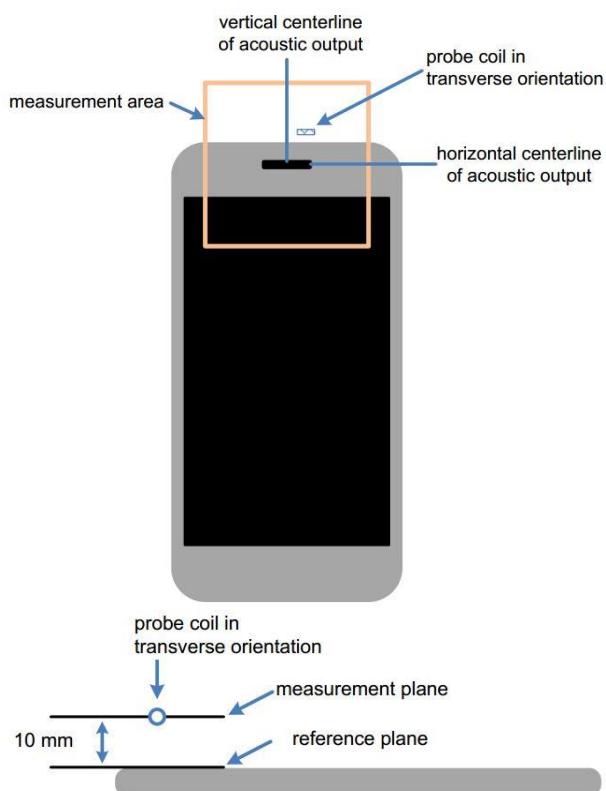

Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

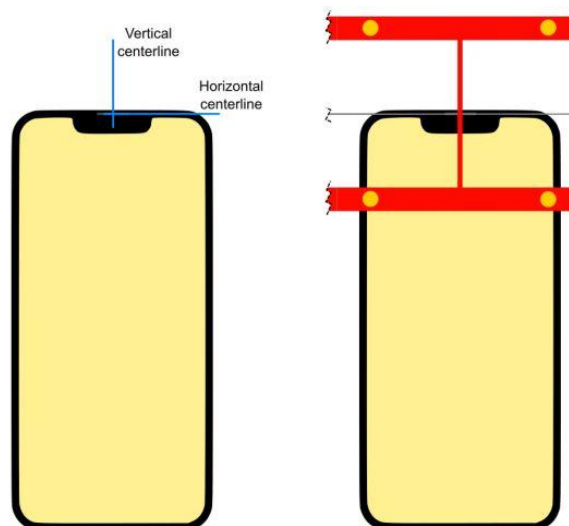

Device Under Test Positioning under the Test Arch

The T-Coil measurement plane, reference plane and other measurement parameters shall be:

- The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 10 mm in front of, the reference plane.
- The reference axis is normal to the reference plane and passes through the center of the acoustic output (or the center of the hole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.
- The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be located in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.
- Measurements of desired ABM signal strength and undesired ABM field are made at $2.0 \text{ mm} \pm 0.5 \text{ mm}$ or 4 mm intervals in an X-Y measurement area pattern over the entire measurement area (676 measurement points total); either all measured, or measured plus interpolated, per ANSI C63.19-2019 section 6.4
- Desired ABM signal frequency response is measured at a single location at or near the maximum
- desired ABM signal strength location.
- The actual locations of the measurement points shall be noted in the test report.



6. Test procedure for T-Coil signal

This subclause describes the procedures used to measure the ABM (T-Coil) performance of the WD. Measurements shall be performed over a measurement area 50 mm square, in the measurement plane, as specified in ANSI C63.19-2019 A.3. The measurement area shall be scanned with a uniform measurement point spacing of $2.0 \text{ mm} \pm 0.5 \text{ mm}$ in each X-Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area

Optionally, measurement point spacing may be increased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated, with none extrapolated.


In addition to measuring the desired ABM signal levels, the weighted magnitude of the unintended signal shall also be determined. Weighting of the unintended and undesired ABM field shall be by the spectral and temporal weighting described in ANSI C63.19-2019 D.4 through D.6

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in ANSI C63.19-2019 Table 6.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report

Measurements shall be performed with the probe coil oriented in the transverse direction, as illustrated in ANSI C63.19-2019 A.3, that is, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal (desired ABM signal) that is useful to a hearing aid T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement points. At a single location only, taken at or near the highest desired ABM signal reading, the desired ABM signal frequency response shall be determined in a third measurement stage. The flowchart in ANSI C63.19-2019 Figure 6.3 illustrates this three-stage process.

To minimize the need to test every WD operating mode to the telecoil requirements of ANSI C63.19-2019 Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the full telecoil scans of ANSI C63.19-2019 section 6.4. 34 For example, operating modes may be pre-screened by scanning for both desired ABM signal and undesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case. In any case, the specific methods and criteria used to determine which configurations are excluded for a WD shall be explicitly stated and justified in the test report. To be considered for exclusion from telecoil testing, operating modes shall also be shown to pass the frequency response requirements of ANSI C63.19-2019 section 6.6.3.


Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific current paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristics could also affect the desired ABM signal). Therefore, any justifications for exclusions should be thorough documented. If an operating mode is under user control and instructions on how to place the WD in a less interfering condition is in the user instructions, those instructions may be followed in configuring the device for testing

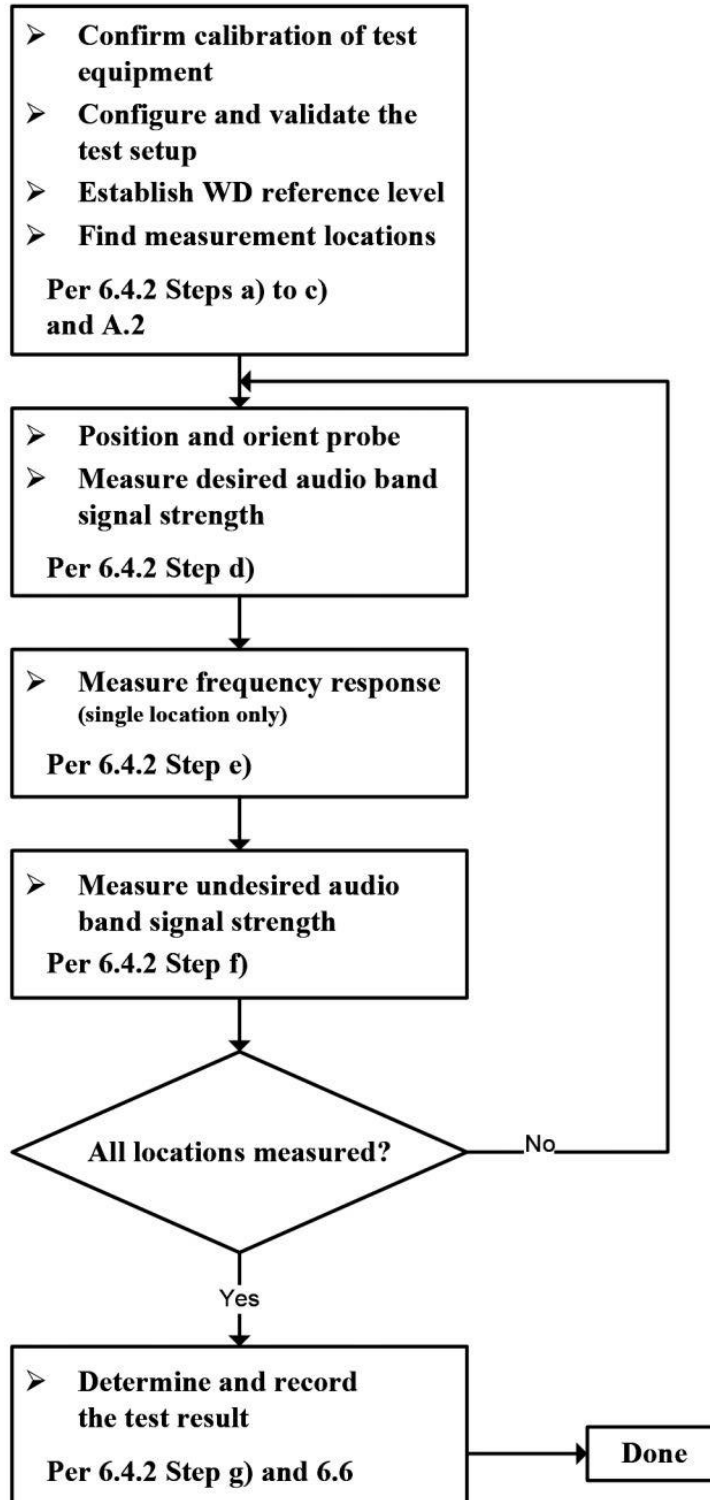Test flow for T-Coil signal test
Test Instructions




The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level. An alternative procedure, yielding equivalent results, using a broadband excitation is described in ANSI C63.19-2019 section 6.5.


- a. A validation of the test setup and instrumentation shall be performed. This may be done using a TMFS or Helmholtz Coil. Measure the emissions and confirm that they are within tolerance of the expected values.
- b. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in ANSI C63.19-2019 section 6.3.2.
- c. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load (if necessary to control RF interference in the measurement equipment) as shown in section 6.1 or section 6.2.
- d. The drive level to the WD is set such that the reference input level specified in ANSI C63.19-2019 Table 6.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (desired ABM signal) at $f = 1$ kHz. Either a sine wave at 1025 Hz, or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as specified in 6.4.3, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used. 35 The same drive level will be used for the desired ABM signal frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- e. At each measurement location over the measurement area and in the transverse orientation, measure and record the desired 1 kHz T-Coil magnetic signal (desired ABM signal) as described in Step c).
- f. At or near a location representing a maximum in the just-measured desired ABM signal, measure and record the desired T-Coil magnetic signals (desired ABM signal at f_i) as described in ANSI C63.19-2019 section 6.4.5.2 in each individual ISO 266:1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step c), and the reading taken for that band. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as described in ANSI C63.19-2019 D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB(A/m).) Compare the frequency response found to the requirements of ANSI C63.19-2019 section 6.6.3.
- g. At the same locations measured in Step d), measure and record the undesired broadband audio magnetic signal (undesired ABM field) with no audio signal applied (or digital zero applied, if appropriate) using the specified spectral weighting, the half-band integrator followed by the temporal weighting.
- h. Calculate and record the location and number of the measurement points that satisfy both the minimum desired ABM signal level and the maximum undesired ABM field level specified in ANSI C63.19-2019 section 6.6.2. Compare this to the requirements in ANSI C63.19-2019 section 6.6.4 and record the result.
- i. Calculate and record the location and number of the measurement points that satisfy the maximum undesired ABM field level and distribution requirements specified in ANSI C63.19-2019 section 6.6.4.

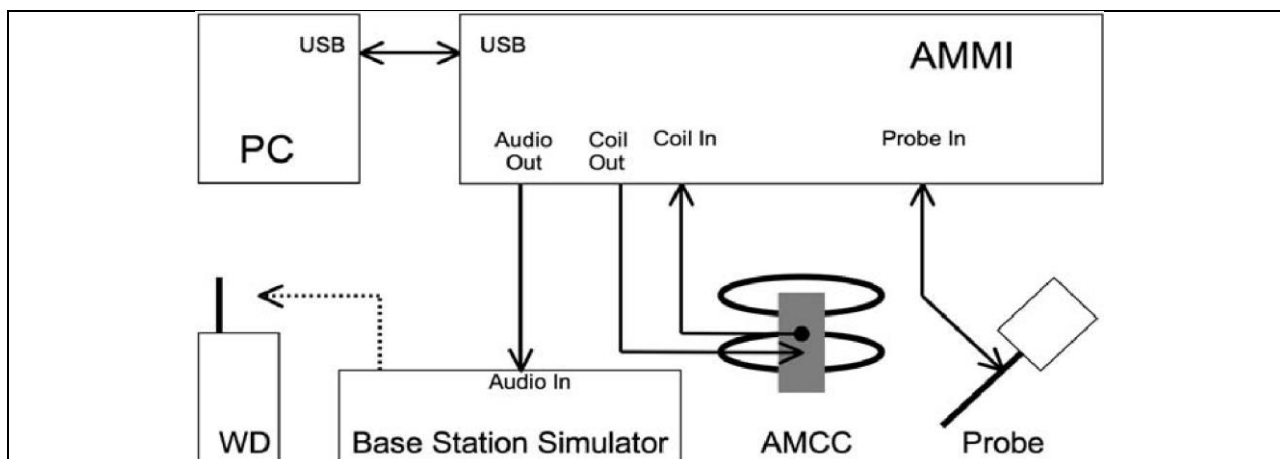Test Setup Diagram for GSM/UMTS/VoLTE/VoWiFi/VoNR

General Note:

- Define the all applicable input audio level as below according to ANSI C63.19-2019 table 6.1:
 - GSM input level: -16dBm0
 - UMTS input level: -16dBm0
 - VoLTE input level: -16dBm0
 - VoNR input level: -16dBm0
 - VoWiFi input level: -16dBm0
- The test setup used for GSM/UMTS is via the callbox of CMW500 for T-coil measurement. The CMW500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined. The CMW500 can be manually configured to control the speech input level and ensure that the result is -16dBm0 for GSM/UMTS CMRS Voice connection.
- Voice over Long-Term Evolution (VoLTE) is a standard for high-speed wireless communication for mobile phones and data terminals — including IoT devices and wearables. It is based on the IP Multimedia Subsystem (IMS) network, with specific profiles for control and media planes of voice service on LTE defined by GSMA in PRD IR.92. This approach results in the voice service (control and media planes) being delivered as data flows within the LTE data bearer. This means that there is no dependency on the legacy circuit-switched voice network to be maintained.
- The test setup used for VoLTE and VoWiFi over IMS is via the callbox of CMW500 for T-coil measurement. The data application unit of the CMW500 is used to simulate the IP multimedia subsystem server. The CMW500 can be manually configured to control the speech input level and ensure that the result is -16dBm0 for VoLTE, and VoWiFi during the IMS connection.
- The test setup used for VoNR over IMS is via the callbox of CMX500 for T-coil measurement. The data application unit of the CMX500 was used to simulate the IP multimedia subsystem server. The CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoNR when the device during the IMS connection.
- According to KDB 285076 D02, T-Coil testing for VoLTE, VoNR and VoWiFi requires test instrumentation that can (1) for the system to be able to establish an IP call from/to the handset under test, (2) through an IMS (IP Multimedia Subsystem) and SIP/IP server, (3) to an analog audio adapter containing the permissible set of codecs used by the device under test, and (4) inject the necessary C63.19 test tones at the average speech level for the measurement. The test setup is illustrated above Figure. The R&S CMW500 and CMX500 was used as system simulator for VoLTE, VoNR and VoWiFi T-Coil testing. The DAU (Data Application Unit) in CMW500, CMX500 integrates IMS and SIP/IP server that can establish VoLTE, VoNR and Wi-Fi calling, and transport the test tones from AMMI (Audio Magnetic Measuring Instrument) to EUT.

<Example define the input level for GSM/UMTS/VoLTE/VoNR/VoWiFi>

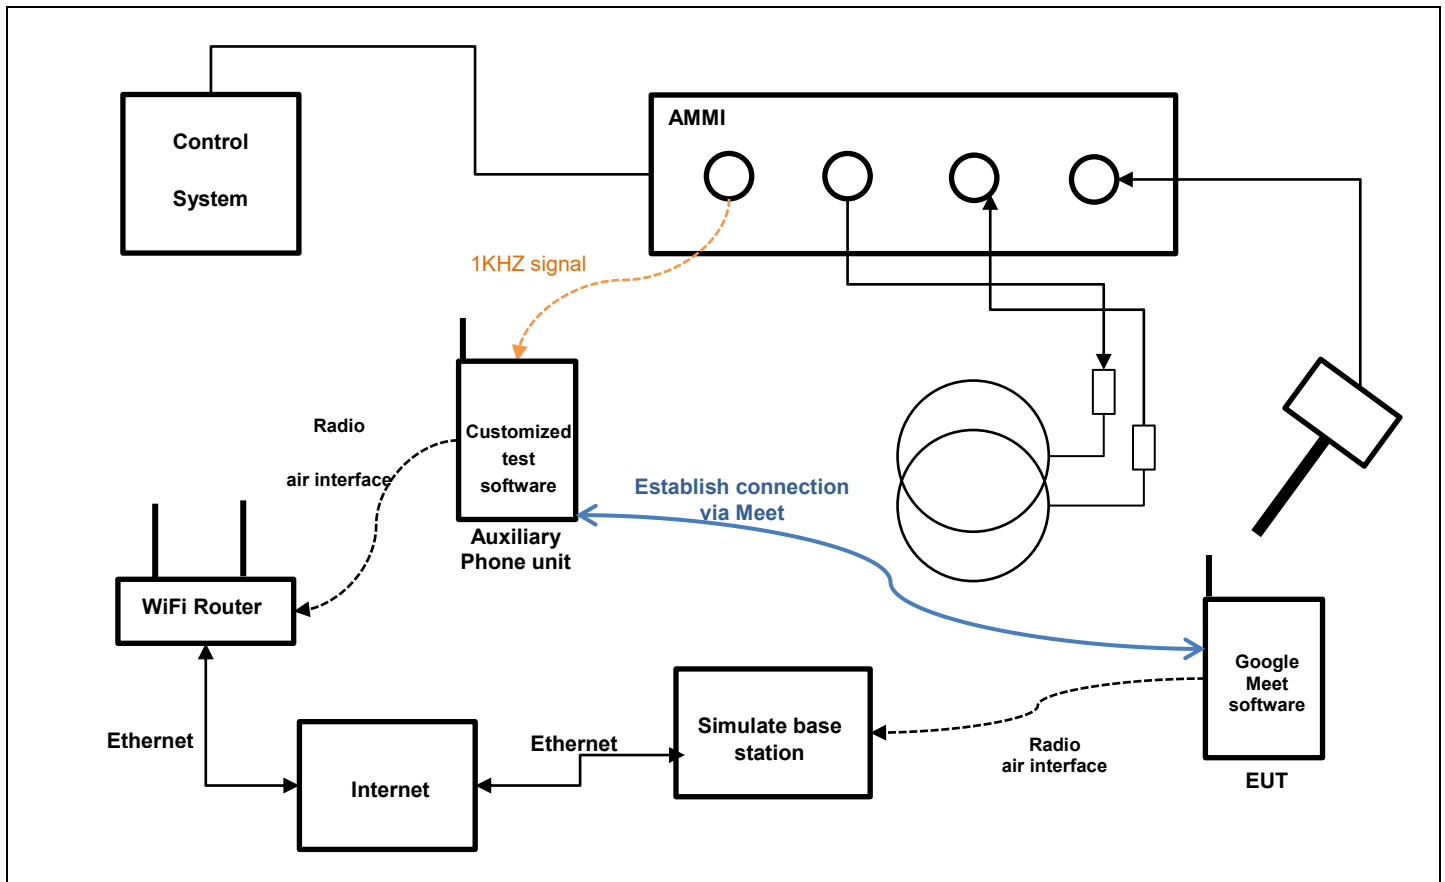Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS))
	3.14	1.5		0.51	
100	5.61		40	2.98	3.13
8.31	-16		18.39		-18.48
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	8.31
48k_voice_1kHz	1	16.2	-12.7	4.33	35.98
48k_voice_300-3000	2	21.6	-18.6	8.48	70.46

Test Setup Diagram for OTT Voice Calling

General Note:

1. Define the all applicable input audio level as below according to C63 and KDB 285076 D02v03:
- OTT Voice calling input Level: -20dBm0
2. OTT voice, such as that enabled when a user opts to communicate in a voice-only mode using the Google Meet application, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over the internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN).
3. Google Meet application support code and bitrate are listed in section 9, and the customized Google Meet software is installed on a mobile phone that is used as the Auxiliary for the test. The software enables the audio coding rate to be changed, and reports the input digital audio level before audio processing, which can be used to calibrate the input audio level.
4. This device comes with the preinstalled OTT application that supports the voice-only communication option on the Google Meet application and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via Google Meet server.
5. The test setup used for Google Meet OTT voice-only communication is via the data application unit on the simulate base station, connected to the internet via the Google Meet server to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value. Please refer to section 9. An assessment was made of each of the different codec bit rates to determine the worst case for each different OTT transport (WiFi, LTE, GSM, WCDMA, NR).
6. The auxiliary device includes software that displays the audio level in dBFS, which allows calibration of the system to establish the -20dBm0 reference level. After establishing the voice-only communication between auxiliary device and device under test, the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -20dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

<Define the input level for OTT Voice Calling>

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal
2. The below calculation formula is an example and showing how to determine the input level for the device.
3. Input a gain value to readout the -23dBFS level as reference. (0dBFS = 3.14 dBm0)
4. Adjust gain level until to readout the dBFS level until it changes to -24dBFS.
5. Based on the step 1 and 2, and then calculate the gain value(dB) by interpolation to get the -20dBm0 corresponding gain value.

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to- RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine	---	3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

(*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

Step	Signal type	Audio out		Target Level		
		Gain value	Gain value (dB)	dBFS	dBm0	
Step 1	1KHz Sine	7.7	17.73 (Ref.)	-23		
Step 2	1KHz Sine	6.8	16.65	-24		
Step 3	1KHz Sine	7.57**	17.58*	-23.14	-20	
Remark	(*) Based on the step 1 and 2 and then via interpolation to get this value. (**) Gain value=10^Gain value(dB)/20					
Signal type		Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain value
1kHz sine			3	0	1	7.57
48k_voice_1kHz_1s.wav		1	16.2	-12.7	4.33	32.77
48k_voice_300-3000_2s.wav		2	21.6	-18.6	8.48	64.79
1. According to the gain setting for 1kHz sine wave, determine the gain setting for signals above.						
2. The gain for the specific signal is multiplied by this factor to achieve the same level as for the 1kHz sine signal.						

**7. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Audio Magnetic 1D Field Probe	AM1DV3	3067	Dec. 16, 2025	Dec. 15, 2026
SPEAG	Audio Magnetic 1D Field Probe	AM1DV3	3104	Mar. 14, 2025	Mar. 13, 2026
SPEAG	Data Acquisition Electronics	DAE4	316	Feb. 11, 2025	Feb. 10, 2026
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 15, 2026	Jan. 14, 2027
SPEAG	Data Acquisition Electronics	DAE4	1805	May. 21, 2025	May. 20, 2026
SPEAG	Audio Magnetic Calibration Coil	AMCC	1049	NCR	NCR
SPEAG	Audio Measuring Instrument	AMMI	1041	NCR	NCR
Testo	Hygro meter	608-H1	45196600	Nov. 04, 2025	Nov. 03, 2026
R&S	Wideband Radio Communication Tester	CMW500	169351	Jul. 14, 2025	Jul. 13, 2026
R&S	Wideband Radio Communication Tester	CMX500	101932	Jun. 05, 2025	Jun. 04, 2026
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR

Note:

1. NCR: "No-Calibration Required"

8. T-Coil testing for CMRS Voice

General Note:

1. Phone Condition: Mute on; Backlight off; Max Volume
2. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
3. Air Interface Investigation:
 - a. Through Internal radio configuration investigation (e.g. bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst radio configuration was document as below table.
 - b. Use the worst-case codec test and document a limited set of bands/channel/bandwidths.
 - c. According to the ANSI C63.19-2019 section 6.3.3, using a frequency near the center of the frequency band perform T-coil evaluation.

8.1 GSM Evaluation Results

<Codec Investigation>

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
GSM850	Voice	189	AMR NB Full Rate	4.75 Kbps	Transversal (Y)	87	273	19	26	Pass
GSM850	Voice	189	AMR NB Full Rate	12.2 Kbps	Transversal (Y)	88	272	19	26	Pass
GSM850	Voice	189	AMR WB Full Rate	6.6 Kbps	Transversal (Y)	78	272	19	26	Pass
GSM850	Voice	189	AMR WB Full Rate	12.65 Kbps	Transversal (Y)	89	273	19	26	Pass
GSM850	Voice	189	EFR NB (FR V2)	12.2Kbps	Transversal (Y)	90	264	19	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
1	GSM850	Voice	189	AMR WB Full Rate 6.6Kbps	Transversal (Y)	78	272	19	26	Pass	-48.90
2	GSM1900	Voice	661	AMR WB Full Rate 6.6Kbps	Transversal (Y)	120	340	23	26	Pass	-48.85

8.2 UMTS Evaluation Results

<Codec Investigation>

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
UMTS B5	Voice	4182	AMR NB	4.75 Kbps	Transversal (Y)	442	676	26	26	Pass
UMTS B5	Voice	4182	AMR NB	12.2 Kbps	Transversal (Y)	455	676	26	26	Pass
UMTS B5	Voice	4182	AMR WB	6.6 Kbps	Transversal (Y)	422	676	26	26	Pass
UMTS B5	Voice	4182	AMR WB	23.85 Kbps	Transversal (Y)	448	676	26	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
3	UMTS B2	Voice	9400	AMR WB 6.6Kbps	Transversal (Y)	426	676	26	26	Pass	-48.96
4	UMTS B4	Voice	1413	AMR WB 6.6Kbps	Transversal (Y)	425	676	26	26	Pass	-49.01
5	UMTS B5	Voice	4182	AMR WB 6.6Kbps	Transversal (Y)	422	676	26	26	Pass	-48.99

8.3 VoLTE Evaluation Results

<Codec Investigation>

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
LTE Band 41_PC2	20M/QPSK/1/0	40620	AMR NB	4.75 Kbps	Transversal (Y)	226	445	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	AMR NB	12.2 Kbps	Transversal (Y)	226	443	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	AMR WB	6.6 Kbps	Transversal (Y)	210	448	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	AMR WB	23.85 Kbps	Transversal (Y)	229	446	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS SWB	9.6 kbps	Transversal (Y)	235	454	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS SWB	24.4 kbps	Transversal (Y)	230	449	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS WB	5.9 kbps	Transversal (Y)	198	457	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS WB	24.4 kbps	Transversal (Y)	231	450	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS NB	5.9 kbps	Transversal (Y)	235	458	26	26	Pass
LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS NB	24.4 kbps	Transversal (Y)	245	457	26	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
6	LTE Band 7	20M/QPSK/1/0	21100	EVS WB 5.9 Kbps	Transversal (Y)	385	676	26	26	Pass	-49.01
7	LTE Band 12	10M/QPSK/1/0	23095	EVS WB 5.9 Kbps	Transversal (Y)	390	676	26	26	Pass	-48.98
8	LTE Band 13	10M/QPSK/1/0	23230	EVS WB 5.9 Kbps	Transversal (Y)	387	676	26	26	Pass	-48.98
9	LTE Band 14	10M/QPSK/1/0	23330	EVS WB 5.9 Kbps	Transversal (Y)	385	676	26	26	Pass	-48.99
10	LTE Band 25	20M/QPSK/1/0	26340	EVS WB 5.9 Kbps	Transversal (Y)	396	676	26	26	Pass	-49.01
11	LTE Band 26	15M/QPSK/1/0	26865	EVS WB 5.9 Kbps	Transversal (Y)	390	676	26	26	Pass	-49.05
12	LTE Band 30	10M/QPSK/1/0	27710	EVS WB 5.9 Kbps	Transversal (Y)	392	676	26	26	Pass	-49.01
13	LTE Band 41_PC2	20M/QPSK/1/0	40620	EVS WB 5.9 Kbps	Transversal (Y)	198	457	26	26	Pass	-49.11
14	LTE Band 48	20M/QPSK/1/0	56150	EVS WB 5.9 Kbps	Transversal (Y)	146	406	26	26	Pass	-49.07
15	LTE Band 66	20M/QPSK/1/0	132322	EVS WB 5.9 Kbps	Transversal (Y)	382	676	26	26	Pass	-49.03
16	LTE Band 71	20M/QPSK/1/0	133297	EVS WB 5.9 Kbps	Transversal (Y)	388	676	26	26	Pass	-49.01

8.4 VoNR Evaluation Results

<Codec Investigation>

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
FR1 n41_PC2	100M/QPSK/1/1	518598	AMR NB	4.75 Kbps	Transversal (Y)	192	425	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	AMR NB	12.2 Kbps	Transversal (Y)	191	426	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	AMR WB	6.6 Kbps	Transversal (Y)	189	422	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	AMR WB	23.85 Kbps	Transversal (Y)	190	425	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS SWB	9.6 kbps	Transversal (Y)	195	429	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS SWB	24.4 kbps	Transversal (Y)	196	430	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS WB	5.9 kbps	Transversal (Y)	191	426	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS WB	24.4 kbps	Transversal (Y)	193	428	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS NB	5.9 kbps	Transversal (Y)	194	426	25	26	Pass
FR1 n41_PC2	100M/QPSK/1/1	518598	EVS NB	24.4 kbps	Transversal (Y)	192	428	25	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
17	FR1 n7	50M/BPSK/1/1	507000	AMR WB 6.6 Kbps	Transversal (Y)	423	674	26	26	Pass	-49.06
18	FR1 n12	15M/BPSK/1/1	141500	AMR WB 6.6 Kbps	Transversal (Y)	427	676	26	26	Pass	-48.93
52	FR1 n13	10M/BPSK/1/1	156400	AMR WB 6.6 Kbps	Transversal (Y)	435	676	26	26	Pass	-49.05
19	FR1 n14	10M/BPSK/1/1	158600	AMR WB 6.6 Kbps	Transversal (Y)	424	676	26	26	Pass	-49.00
20	FR1 n25	40M/BPSK/1/1	376500	AMR WB 6.6 Kbps	Transversal (Y)	447	676	26	26	Pass	-48.99
21	FR1 n25_ULMIMO	40M/BPSK/1/1	376500	AMR WB 6.6 Kbps	Transversal (Y)	426	676	26	26	Pass	-48.78
22	FR1 n26	20M/BPSK/1/1	166300	AMR WB 6.6 Kbps	Transversal (Y)	428	676	26	26	Pass	-49.11
23	FR1 n30	10M/BPSK/1/1	462000	AMR WB 6.6 Kbps	Transversal (Y)	425	676	26	26	Pass	-48.97
24	FR1 n41_PC2	100M/QPSK/1/1	518598	AMR WB 6.6 Kbps	Transversal (Y)	184	416	25	26	Pass	-49.88
25	FR1 n41_ULMIMO	100M/QPSK/1/1	518598	AMR WB 6.6 Kbps	Transversal (Y)	86	315	22	26	Pass	-49.95
26	FR1 n48	40M/BPSK/1/1	641666	AMR WB 6.6 Kbps	Transversal (Y)	244	474	26	26	Pass	-49.91
27	FR1 n48_PC3_ULMIMO	40M/BPSK/1/1	641666	AMR WB 6.6 Kbps	Transversal (Y)	205	395	25	26	Pass	-49.92
28	FR1 n66	40M/BPSK/1/1	349000	AMR WB 6.6 Kbps	Transversal (Y)	445	675	26	26	Pass	-48.89
29	FR1 n66_ULMIMO	40M/BPSK/1/1	349000	AMR WB 6.6 Kbps	Transversal (Y)	422	672	26	26	Pass	-48.84
30	FR1 n70	15M/BPSK/1/1	340500	AMR WB 6.6 Kbps	Transversal (Y)	445	676	26	26	Pass	-49.01
31	FR1 n71	20M/BPSK/1/1	136100	AMR WB 6.6 Kbps	Transversal (Y)	426	676	26	26	Pass	-49.13
32	FR1 n77_PC2	100M/QPSK/1/1	656000	AMR WB 6.6 Kbps	Transversal (Y)	153	382	25	26	Pass	-49.95
33	FR1 n77_ULMIMO	100M/QPSK/1/1	656000	AMR WB 6.6 Kbps	Transversal (Y)	123	357	25	26	Pass	-49.95

8.5 VoWiFi Evaluation Results

<Codec Investigation>

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	AMR NB	4.75 Kbps	Transversal (Y)	177	401	23	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	AMR NB	12.2 Kbps	Transversal (Y)	179	405	24	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	AMR WB	6.6 Kbps	Transversal (Y)	87	340	18	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	AMR WB	23.85 Kbps	Transversal (Y)	120	349	18	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS SWB	9.6 kbps	Transversal (Y)	150	375	18	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS SWB	24.4 kbps	Transversal (Y)	159	382	20	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS WB	5.9 kbps	Transversal (Y)	130	350	18	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS WB	24.4 kbps	Transversal (Y)	174	399	22	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS NB	5.9 kbps	Transversal (Y)	151	372	18	26	Pass
WLAN2.4GHz_MIMO	802.11g 6Mbps	6	EVS NB	24.4 kbps	Transversal (Y)	155	379	19	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
34	WLAN2.4GHz_MIMO	802.11g 6Mbps	6	AMR WB 6.6Kbps	Transversal (Y)	87	340	18	26	Pass	-49.88
35	WLAN5GHz_MIMO	802.11a 6Mbps	40	AMR WB 6.6Kbps	Transversal (Y)	138	383	25	26	Pass	-49.91
36	WLAN5GHz_MIMO	802.11a 6Mbps	60	AMR WB 6.6Kbps	Transversal (Y)	126	371	24	26	Pass	-49.85
37	WLAN5GHz_MIMO	802.11a 6Mbps	116	AMR WB 6.6Kbps	Transversal (Y)	126	368	24	26	Pass	-49.92
38	WLAN5GHz_MIMO	802.11a 6Mbps	149	AMR WB 6.6Kbps	Transversal (Y)	127	372	24	26	Pass	-49.91
39	WLAN5GHz_MIMO	802.11a 6Mbps	173	AMR WB 6.6Kbps	Transversal (Y)	115	361	25	26	Pass	-49.96
40	WLAN6GHz_MIMO	802.11ax-HE20 MCS0	1	AMR WB 6.6Kbps	Transversal (Y)	143	387	25	26	Pass	-49.89

9. T-Coil testing for OTT Voice Calling

General Notes:

1. According to ANSI C63.19-2019 section 6.3.3, a frequency near the center of the frequency band should be used for T-coil evaluation.
2. Phone Condition: Mute on; Backlight off; Max Volume
3. The device supported a pre-installed application, Google Meet, whose features allow voice-only communication. According to KDB 285076 D02, all air interfaces via data connections with applications providing voice functionality must be considered for HAC testing.
4. Google Meet only supports the OPUS audio codec with bitrates ranging from 6 Kbps to 75 Kbps.
5. The test setup used for OTT Voice call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary OTT unit which is used to configure the audio codec rate and determine the audio input level of -20dBm0 based on the KDB 285076 D02 requirement.
6. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations and document the parameters for that voice service. It is only necessary to document this for one channel/band. The following test results will identify the worst-case codec to be used for handset testing.
7. Air Interface Investigation:
 - a. Through Internal radio configuration investigation (e.g. bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst radio configuration was document as below table.
 - b. Use the worst-case codec test and document a limited set of bands/channel/bandwidths.
 - c. OTT service and CMRS IP service are established over the internet protocol for the voice service, and on both services the identical RF air interface is used for LTE, WIFI and NR. Therefore, according to VoLTE, VoWiFi and VoNR test results from the air interface investigation, the worst configuration and frequency band of the air interface is used for OTT T-Coil testing.
 - LTE FDD worst configuration and band: LTE Band 71/20MHz/QPSK/1RB Size
 - LTE TDD worst configuration and band: LTE Band 48/20MHz/QPSK/1RB Size
 - NR FDD worst configuration and band: NR n66/40MHz/DFT-PI/2 BPSK/1RB Size
 - NR TDD worst configuration and band: NR n41/100MHz/DFT-PI/2 QPSK/1RB Size
 - WLAN DTS worst configuration: 802.11b/1Mbps
 - WLAN U-NII worst configuration and Band: WLAN 5.9GHz/11a/6Mbps

<Codec Investigation>

EDGE

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
GSM850	EDGE 2 Tx slots	189	Opus	6kbps	Transversal (Y)	190	442	25	26	Pass
GSM850	EDGE 2 Tx slots	189	Opus	40kbps	Transversal (Y)	195	447	25	26	Pass
GSM850	EDGE 2 Tx slots	189	Opus	75kbps	Transversal (Y)	196	449	25	26	Pass

HSPA

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
UMTS B5	HSPA	4182	Opus	6kbps	Transversal (Y)	475	676	26	26	Pass
UMTS B5	HSPA	4182	Opus	40kbps	Transversal (Y)	475	676	26	26	Pass
UMTS B5	HSPA	4182	Opus	75kbps	Transversal (Y)	472	672	26	26	Pass

LTE

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
LTE Band 48	20M/QPSK/1/0	55830	Opus	6kbps	Transversal (Y)	235	430	26	26	Pass
LTE Band 48	20M/QPSK/1/0	55830	Opus	40kbps	Transversal (Y)	242	438	26	26	Pass
LTE Band 48	20M/QPSK/1/0	55830	Opus	75kbps	Transversal (Y)	243	438	26	26	Pass

5G NR

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
FR1 n41_ULMIMO	100M/QPSK/1/1	518598	Opus	6kbps	Transversal (Y)	134	367	20	26	Pass
FR1 n41_ULMIMO	100M/QPSK/1/1	518598	Opus	40kbps	Transversal (Y)	138	369	20	26	Pass
FR1 n41_ULMIMO	100M/QPSK/1/1	518598	Opus	75kbps	Transversal (Y)	139	373	21	26	Pass

WLAN

Air Interface	Radio Configuration	Channel	Codec	Bit rate	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)
WLAN2.4GHz_MIMO	802.11b 1Mbps	6	Opus	6kbps	Transversal (Y)	107	338	18	26	Pass
WLAN2.4GHz_MIMO	802.11b 1Mbps	6	Opus	40kbps	Transversal (Y)	110	340	19	26	Pass
WLAN2.4GHz_MIMO	802.11b 1Mbps	6	Opus	75kbps	Transversal (Y)	113	342	19	26	Pass

<Air Interface Investigation>

Plot No.	Air Interface	Radio Configuration	Channel	Codec	Probe Position	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response Margin (dB)	Ambient Noise dB (A/m)
41	GSM850	EDGE 2 Tx slots	189	Opus 6kbps	Transversal (Y)	190	442	25	26	Pass	-49.95
42	GSM1900	EDGE 2 Tx slots	661	Opus 6kbps	Transversal (Y)	146	445	24	26	Pass	-49.87
43	WCDMA II	HSPA	9400	Opus 75kbps	Transversal (Y)	476	676	26	26	Pass	-49.88
44	WCDMA IV	HSPA	1413	Opus 75kbps	Transversal (Y)	422	672	26	26	Pass	-49.91
45	WCDMA V	HSPA	4182	Opus 75kbps	Transversal (Y)	472	672	26	26	Pass	-49.88
46	LTE Band 71	20M/QPSK/1/0	133297	Opus 6kbps	Transversal (Y)	429	676	26	26	Pass	-49.85
47	LTE Band 48	20M/QPSK/1/0	56150	Opus 6kbps	Transversal (Y)	235	430	26	26	Pass	-49.85
48	FR1 n66_ULMIMO	40M/BPSK/1/1	349000	Opus 6kbps	Transversal (Y)	497	671	26	26	Pass	-49.92
49	FR1 n41_ULMIMO	100M/QPSK/1/1	518598	Opus 6kbps	Transversal (Y)	134	367	20	26	Pass	-49.85
50	WLAN2.4GHz_MIMO	802.11g 6Mbps	6	Opus 6kbps	Transversal (Y)	107	338	18	26	Pass	-49.96
51	WLAN5GHz_MIMO	802.11a 6Mbps	173	Opus 6kbps	Transversal (Y)	90	329	19	26	Pass	-49.89

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Test Engineer : Willy Yu, Lev Lo and Barry Huang

10. Uncertainty Assessment

The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance. The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 8.2.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (ABM1)	Ci (ABM2)	Standard Uncertainty (ABM1)	Standard Uncertainty (ABM2)
Probe Sensitivity							
Reference Level	3.0	Normal	1	1	1	± 3.0 %	± 3.0 %
AMCC Geometry	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
AMCC Current	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Probe Positioning During Calibrate	0.1	Rectangular	√3	1	1	± 0.1 %	± 0.1 %
Noise Contribution	0.7	Rectangular	√3	0.0143	1	± 0.0 %	± 0.4 %
Frequency Slope	5.9	Rectangular	√3	0.1	1	± 0.3 %	± 3.5 %
Probe System							
Repeatability / Drift	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity / Dynamic Range	0.6	Rectangular	√3	1	1	± 0.4 %	± 0.4 %
Acoustic Noise	1.0	Rectangular	√3	0.1	1	± 0.1 %	± 0.6 %
Probe Angle	2.3	Rectangular	√3	1	1	± 1.4 %	± 1.4 %
Spectral Processing	0.9	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	0.6	Normal	1	1	5	± 0.6 %	± 3.0 %
Field Disturbance	0.2	Rectangular	√3	1	1	± 0.1 %	± 0.1 %
Test Signal							
Reference Signal Spectral Response	0.6	Rectangular	√3	0	1	± 0.0 %	± 0.4 %
Positioning							
Probe Positioning	1.9	Rectangular	√3	1	1	± 1.1 %	± 1.1 %
Phantom Thickness	0.9	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
EUT Positioning	1.9	Rectangular	√3	1	1	± 1.1 %	± 1.1 %
External Contributions							
RF Interference	0.0	Rectangular	√3	1	0.3	± 0.0 %	± 0.0 %
Test Signal Variation	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Combined Standard Uncertainty						± 4.1 %	± 6.1 %
Coverage Factor for 95 %						K = 2	
Expanded Uncertainty						± 8.1 %	± 12.3 %
Declaration of Conformity: The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.							
Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.							

Uncertainty Budget of audio band magnetic measurement



11. References

- [1] ANSI C63.19-2019, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", Aug. 2019.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep. 2023.
- [3] FCC KDB 285076 D02v04, "Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services", Feb 2022
- [4] FCC KDB 285076 D03v01r07, "Hearing aid compatibility frequently asked questions", Dec. 2024
- [5] SPEAG DASY System Handbook