



FCC RADIO TEST REPORT

FCC ID : A4RGPQQ7
Equipment : Phone
Model Name : GPQQ7
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 12, 2025 and testing was performed from Dec. 30, 2025 to Feb. 25, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Fundamental Maximum EIRP Measurement	22
3.3 Fundamental Power Spectral Density Measurement	37
3.4 In-Band Emissions (Channel Mask)	60
3.5 Transmit Power Control (TPC)	110
3.6 AC Conducted Emission Measurement.....	112
3.7 Antenna Requirements.....	114
4 List of Measuring Equipment.....	115
5 Measurement Uncertainty	117
Appendix A. AC Conducted Emission Test Result	
Appendix B. Duty Cycle Plots	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N0809-01I	01	Initial issue of report	May 08, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(9)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(9)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	See Note
3.5	15.407(d)(10)	Transmit Power Control (TPC)	Pass	-
-	15.407(b)	Unwanted Emissions	Pass	See Note
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Note: For Contention Based Protocol and Unwanted Emissions test data, please refer to Sporton report number FR5N0809-01G.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Vina Su



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Wi-Fi 802.11ax, NFC, WPC Rx and GNSS Rx.
Antenna Type WLAN: <Ant. 4>: ILA Antenna <Ant. 3>: IFA Antenna

EUT Information List	
S/N	Performed Test Item
61041FDKY00019	RF Conducted Measurement
61031FDKY0000V	Conducted Emission
5B111FDDX000DE 5B111FDDX000DL	Transmit Power Control (TPC)

Antenna information for Directional Gain		
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	<6G_Ant4 + 6G_Ant3> Correlated: -1.07 Uncorrelated: -3.01
6425 MHz ~ 6525 MHz	Peak Gain (dBi)	<6G_Ant4 + 6G_Ant3> Correlated: -1.68 Uncorrelated: -4.19
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	<6G_Ant4 + 6G_Ant3> Correlated: -1.08 Uncorrelated: -4.06
6875 MHz ~ 7125 MHz	Peak Gain (dBi)	<6G_Ant4 + 6G_Ant3> Correlated: -4.12 Uncorrelated: -6.53

Remark:

- The antenna gain is provided by the MIMO antenna report from manufacturer.
For CDD mode, uncorrelated gain is used for EIRP output power calculation and correlated gain is for PSD EIRP calculation.
For SDM mode, uncorrelated gain is used for EIRP output power/ PSD calculation.
- The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY (TAF Code: 1190)
Remark	The Transmit Power Control (TPC) test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), For radiated measurement, the test is covered by standard power client mode and low power indoor client mode because the VLP output power is lower than them.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



2.2 Test Mode

This device supports WiFi 802.11ax 20MHz bandwidth for 2.4GHz and 80MHz bandwidth for both 5GHz and 6GHz.

This device supports both CDD and SDM modes.

For bands other than LPI and VLP, SDM mode is covered by CDD mode due to identical power level.

For LPI and VLP bands, the output power and PSD are measured against EIRP and PSD limit for both CDD and SDM mode. All the other test cases are performed under CDD mode using SDM power level as worst case to show compliance.

This device supports 26/52/106/242/484/996 single tone RU modes for 802.11ax mode and the 242/484/996-tone RU modes are covered by 20/40/80MHz channels.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The final test modes include the worst data rates for each modulation shown in the table below.


MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 2 : 802.11ax HE20 Channel 49 Tx + USB Cable 2 (Charging from AC Adapter)



2.3 Connection Diagram of Test System



Conduction Test Setup									
No.	Power Source	Connection Type	Test Mode						
			2	-	-	-	-	-	-
B1	AC : 120V/60Hz	AC Power Cable	X	-	-	-	-	-	-

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “BTWIFI_Final_version_240823” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

For EIRP output power:

The EIRP output power result is derived from RF conducted power plus directional antenna gain.

EIRP = RF conducted power + directional antenna gain.

Following shows an offset computation example with conducted power 20.2 dBm and directional antenna gain 3dBi.

$$\begin{aligned}\text{EIRP(dBm)} &= \text{RF conducted power(dBm)} + \text{directional antenna gain(dBi)} \\ &= 20.2 + 3 = 23.2 \text{ (dBm)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 OBW and Section 12.5.2 Emission bandwidth.
2. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max-hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

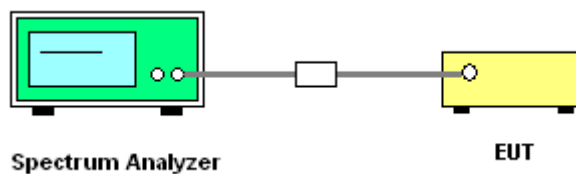

**3.1.5 Test Result of 26dB & 99% Occupied Bandwidth**

Test Engineer:	Howard Tsai	Temperature:	21~25	°C
Test Date:	2025/12/30~2026/02/25	Relative Humidity:	51~54	%

MIMO <Ant. 4+3>**CDD Mode**

U-NII-5 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq (MHz)	99%		26 dB		Emission	Pass /Fail
					Bandwidth		Bandwidth		Bandwidth	
					(MHz)		(MHz)		Limit (MHz)	
					Ant4	Ant3	Ant4	Ant3		
11a	6M	2	01	5955	17.56	17.15	21.77	21.38	320.00	Pass
11a	6M	2	49	6195	17.58	17.18	21.90	21.55	320.00	Pass
11a	6M	2	93	6415	17.56	17.19	21.72	21.70	320.00	Pass

U-NII-6 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq (MHz)	99%		26 dB		Emission Bandwidth Limit (MHz)	Pass /Fail
					Bandwidth (MHz)		Bandwidth (MHz)			
					Ant4	Ant3	Ant4	Ant3		
11a	6M	2	97	6435	17.53	17.17	21.83	21.58	320.00	Pass
11a	6M	2	105	6475	17.56	17.21	21.73	21.57	320.00	Pass
11a	6M	2	113	6515	17.57	17.16	21.79	21.56	320.00	Pass



U-NII-7 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq (MHz)	99%		26 dB		Emission	Pass /Fail
					Bandwidth		Bandwidth		Bandwidth	
					(MHz)		(MHz)		Limit	
					Ant4	Ant3	Ant4	Ant3	(MHz)	
11a	6M	2	117	6535	17.53	17.18	21.78	21.52	320.00	Pass
11a	6M	2	149	6695	17.55	17.15	21.89	21.57	320.00	Pass
11a	6M	2	181	6855	17.62	17.21	21.94	21.47	320.00	Pass

U-NII-7 Straddle channel MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant4	Ant3	Ant4	Ant3		
11a	6M	2	185	6875	17.58	17.18	21.82	21.62	320.00	Pass

U-NII-8 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq (MHz)	99%		26 dB		Emission Bandwidth Limit (MHz)	Pass /Fail
					Bandwidth		Bandwidth			
					(MHz)		(MHz)			
					Ant4	Ant3	Ant4	Ant3		
11a	6M	2	189	6895	17.53	17.17	21.78	21.65	320.00	Pass
11a	6M	2	209	6995	17.53	17.15	21.97	21.42	320.00	Pass
11a	6M	2	229	7095	17.52	17.16	21.79	21.40	320.00	Pass



U-NII-5 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	01	5955	Full	19.13	19.10	21.62	21.66	320.00	Pass
HE20	MCS0	2	49	6195	Full	19.12	19.12	21.87	21.71	320.00	Pass
HE20	MCS0	2	93	6415	Full	19.13	19.10	21.95	21.66	320.00	Pass
HE40	MCS0	2	03	5965	Full	37.48	37.47	40.54	40.48	320.00	Pass
HE40	MCS0	2	51	6205	Full	37.49	37.45	40.56	40.64	320.00	Pass
HE40	MCS0	2	91	6405	Full	37.50	37.49	40.85	40.59	320.00	Pass
HE80	MCS0	2	07	5985	Full	76.90	76.97	82.56	82.82	320.00	Pass
HE80	MCS0	2	55	6225	Full	76.84	76.90	83.01	82.50	320.00	Pass
HE80	MCS0	2	87	6385	Full	76.91	76.90	82.78	83.04	320.00	Pass



U-NII-6 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	97	6435	Full	19.15	19.10	21.89	21.69	320.00	Pass
HE20	MCS0	2	105	6475	Full	19.11	19.09	21.75	21.56	320.00	Pass
HE20	MCS0	2	113	6515	Full	19.12	19.11	21.81	21.57	320.00	Pass
HE40	MCS0	2	99	6445	Full	37.49	37.45	40.69	40.42	320.00	Pass
HE40	MCS0	2	107	6485	Full	37.49	37.47	40.42	40.54	320.00	Pass
HE80	MCS0	2	103	6465	Full	76.90	77.04	82.98	89.98	320.00	Pass

U-NII-6 Straddle channel MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3		
HE40	MCS0	2	115	6525	Full	37.49	37.45	40.32	40.59	320.00	Pass
HE80	MCS0	2	119	6545	Full	76.97	77.09	83.42	91.01	320.00	Pass



U-NII-7 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99%		26 dB		Emission Bandwidth Limit (MHz)	Pass /Fail
						Bandwidth (MHz)		Bandwidth (MHz)			
						Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	117	6535	Full	19.12	19.09	21.73	21.67	320.00	Pass
HE20	MCS0	2	149	6695	Full	19.12	19.10	21.74	21.62	320.00	Pass
HE20	MCS0	2	181	6855	Full	19.14	19.11	21.86	21.46	320.00	Pass
HE40	MCS0	2	123	6565	Full	37.49	37.47	40.59	40.53	320.00	Pass
HE40	MCS0	2	147	6685	Full	37.48	37.47	40.54	40.35	320.00	Pass
HE40	MCS0	2	179	6845	Full	37.51	37.52	40.61	40.64	320.00	Pass
HE80	MCS0	2	135	6625	Full	77.00	77.04	82.72	90.43	320.00	Pass
HE80	MCS0	2	151	6705	Full	76.97	77.10	83.04	96.26	320.00	Pass
HE80	MCS0	2	167	6785	Full	77.00	77.32	88.16	116.77	320.00	Pass

U-NII-7 Straddle channel MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99%		26 dB		Emission Bandwidth Limit (MHz)	Pass /Fail
						Bandwidth (MHz)		Bandwidth (MHz)			
						Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	185	6875	Full	19.15	19.11	21.77	21.75	320.00	Pass
HE40	MCS0	2	187	6885	Full	37.51	37.49	40.37	40.45	320.00	Pass
HE80	MCS0	2	183	6865	Full	77.02	77.23	89.70	107.49	320.00	Pass



U-NII-8 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	189	6895	Full	19.13	19.10	21.87	21.70	320.00	Pass
HE20	MCS0	2	209	6995	Full	19.12	19.09	21.82	21.66	320.00	Pass
HE20	MCS0	2	229	7095	Full	19.13	19.08	21.88	21.41	320.00	Pass
HE40	MCS0	2	195	6925	Full	37.64	37.72	45.58	44.72	320.00	Pass
HE40	MCS0	2	211	7005	Full	37.67	37.66	40.93	43.58	320.00	Pass
HE40	MCS0	2	227	7085	Full	37.70	37.73	41.02	48.08	320.00	Pass
HE80	MCS0	2	199	6945	Full	78.77	79.15	151.81	161.89	320.00	Pass
HE80	MCS0	2	215	7025	Full	78.27	78.99	158.69	158.02	320.00	Pass



3.1.6 Test Plot of 26dB & 99% Occupied Bandwidth


Note: The EBW spectrum setting is as following table for different nominal bandwidth.

Setting	20MHz	40MHz	80MHz
RBW	500kHz	1MHz	2MHz
VBW	2MHz	3MHz	10MHz

MIMO <Ant. 4+3>

CDD Mode


<802.11a>

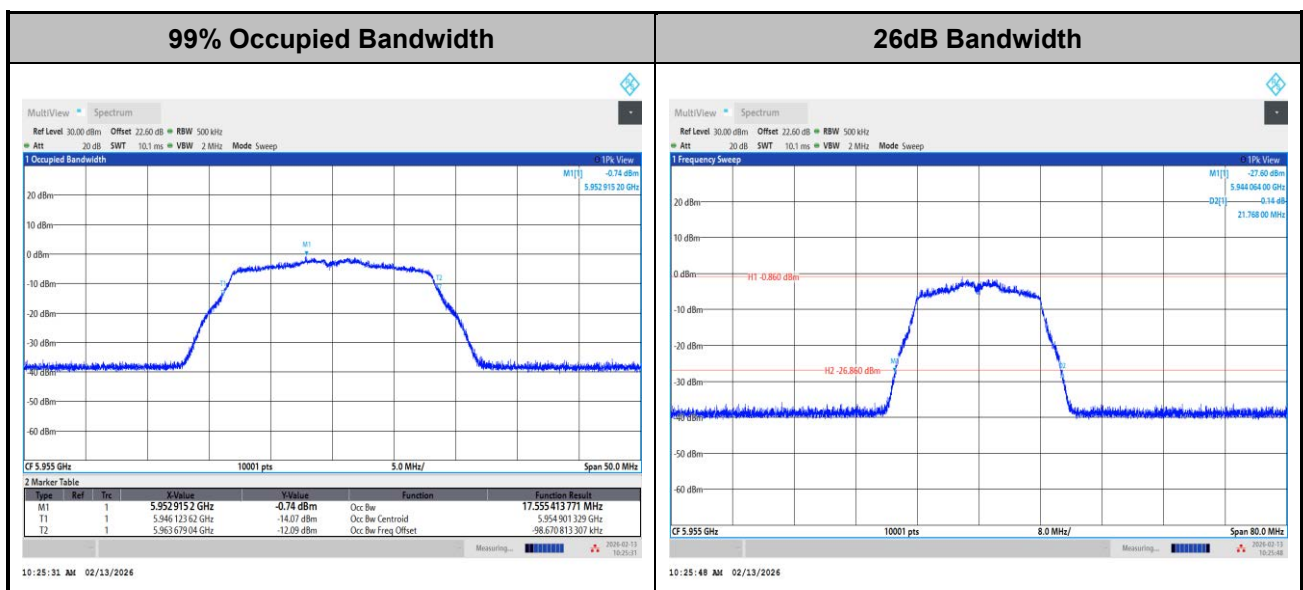

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE20>

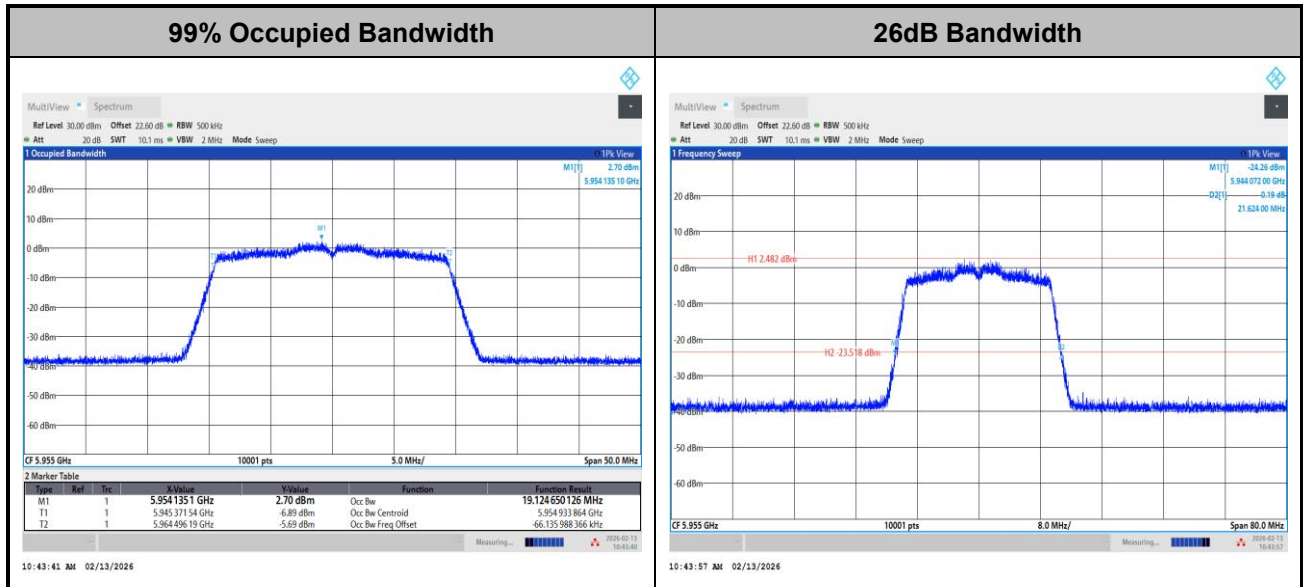

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE40>

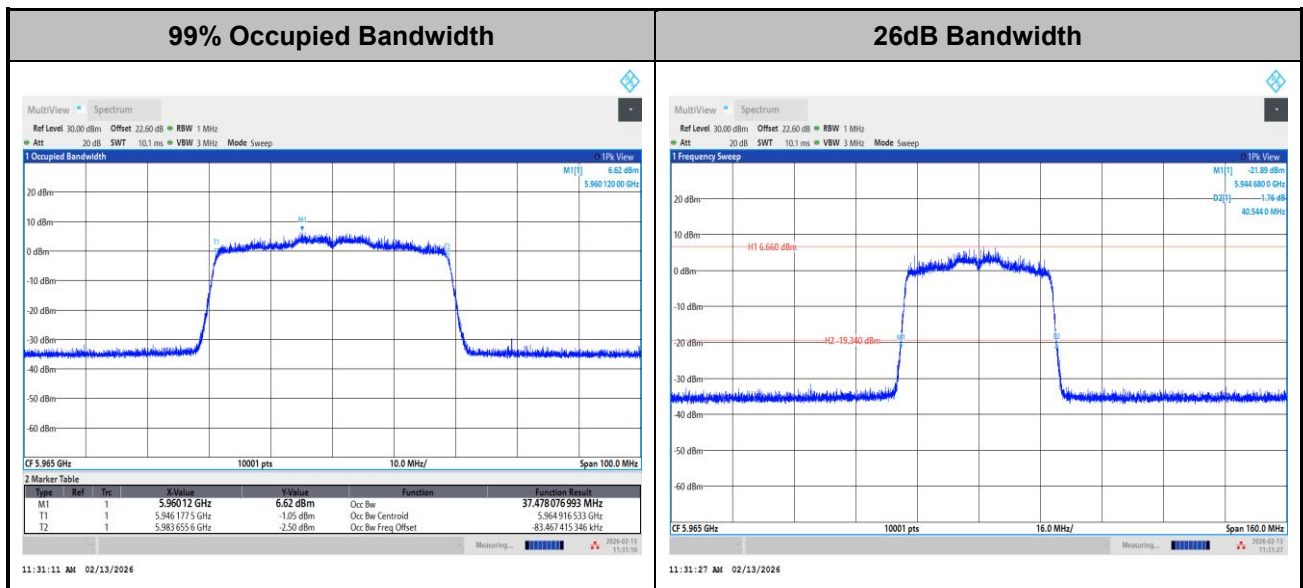

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE80>

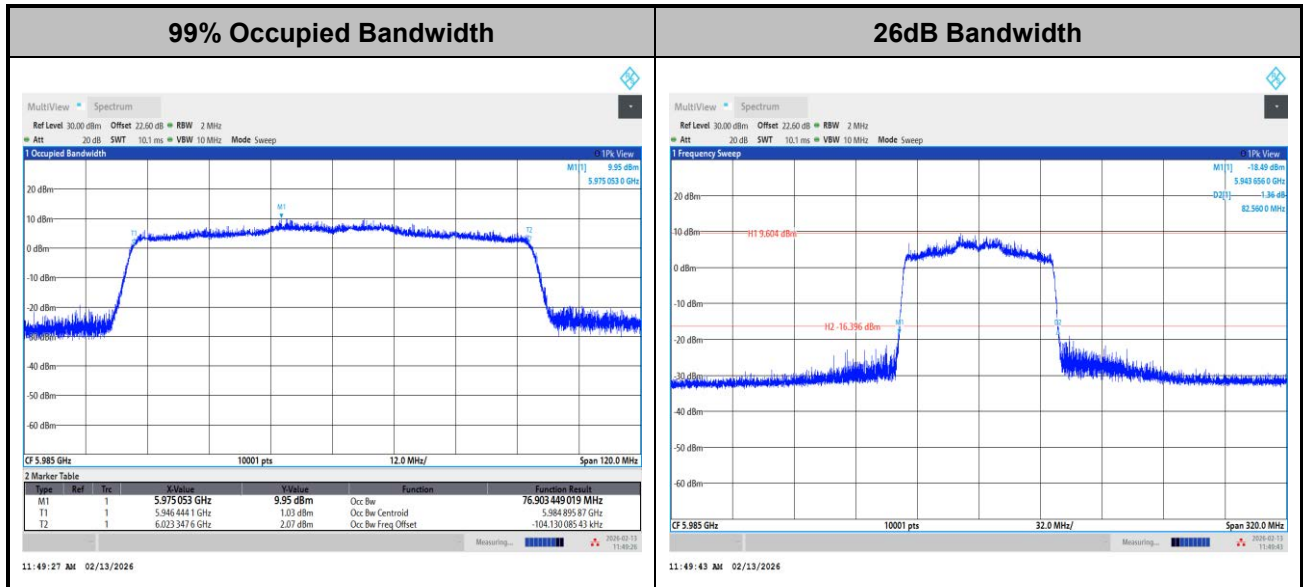

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band and the maximum e.i.r.p must not exceed 14 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

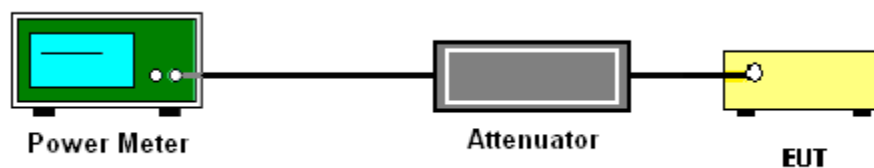

**3.2.5 Test Result of Fundamental Maximum EIRP**

Test Engineer:	Howard Tsai	Temperature:	21~25	°C
Test Date:	2025/12/30~2026/02/25	Relative Humidity:	51~54	%

MIMO <Ant. 4+3>**CDD Mode**

U-NII-5 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	01	5955	3.54	4.00	6.79	-3.01		3.78		14.00	Pass
11a	6M	2	49	6195	3.60	3.00	6.32	-3.01		3.31		14.00	Pass
11a	6M	2	93	6415	3.76	3.83	6.81	-3.01		3.80		14.00	Pass

U-NII-6 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
					Power			(dBi)		Power			
					(dBm)					(dBm)			
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	97	6435	4.37	3.77	7.09	-4.19		2.90		14.00	Pass
11a	6M	2	105	6475	4.50	4.01	7.27	-4.19		3.08		14.00	Pass
11a	6M	2	113	6515	4.47	3.87	7.19	-4.19		3.00		14.00	Pass



U-NII-7 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	117	6535	3.97	3.71	6.85	-4.06		2.79		14.00	Pass
11a	6M	2	149	6695	3.77	3.97	6.88	-4.06		2.82		14.00	Pass
11a	6M	2	181	6855	3.67	3.44	6.57	-4.06		2.51		14.00	Pass

U-NII-7 Straddle channel MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	185	6875	3.49	3.63	6.57	-4.06		2.51		14.00	Pass

U-NII-8 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	189	6895	7.45	7.27	10.37	-6.53		3.84		14.00	Pass
11a	6M	2	209	6995	7.10	6.90	10.01	-6.53		3.48		14.00	Pass
11a	6M	2	229	7095	7.23	6.94	10.10	-6.53		3.57		14.00	Pass



U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	01	5955	Full	3.78	4.46	7.14	-3.01		4.13		14.00	Pass
HE20	MCS0	2	01	5955	26RU/0	-4.62	-4.04	-1.31	-3.01		-4.32		14.00	Pass
HE20	MCS0	2	01	5955	52RU/37	-2.10	-1.30	1.33	-3.01		-1.68		14.00	Pass
HE20	MCS0	2	01	5955	106RU/53	1.32	2.03	4.70	-3.01		1.69		14.00	Pass
HE20	MCS0	2	49	6195	Full	4.18	3.60	6.91	-3.01		3.90		14.00	Pass
HE20	MCS0	2	49	6195	26RU/4	-3.22	-3.93	-0.55	-3.01		-3.56		14.00	Pass
HE20	MCS0	2	49	6195	52RU/38	-1.45	-2.08	1.26	-3.01		-1.75		14.00	Pass
HE20	MCS0	2	49	6195	106RU/53	1.79	1.07	4.46	-3.01		1.45		14.00	Pass
HE20	MCS0	2	93	6415	Full	4.02	4.13	7.09	-3.01		4.08		14.00	Pass
HE20	MCS0	2	93	6415	26RU/8	-4.03	-3.86	-0.93	-3.01		-3.94		14.00	Pass
HE20	MCS0	2	93	6415	52RU/40	-1.33	-1.21	1.74	-3.01		-1.27		14.00	Pass
HE20	MCS0	2	93	6415	106RU/54	1.97	2.09	5.04	-3.01		2.03		14.00	Pass
HE40	MCS0	2	03	5965	Full	6.21	7.00	9.63	-3.01		6.62		14.00	Pass
HE40	MCS0	2	51	6205	Full	6.90	6.69	9.81	-3.01		6.80		14.00	Pass
HE40	MCS0	2	91	6405	Full	6.60	6.90	9.76	-3.01		6.75		14.00	Pass
HE80	MCS0	2	07	5985	Full	9.06	10.40	12.79	-3.01		9.78		14.00	Pass
HE80	MCS0	2	55	6225	Full	9.46	10.10	12.80	-3.01		9.79		14.00	Pass
HE80	MCS0	2	87	6385	Full	9.66	10.50	13.11	-3.01		10.10		14.00	Pass



U-NII-6 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
						Power			(dBi)		Power			
						(dBm)					(dBm)			
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	97	6435	Full	5.10	4.90	8.01	-4.19		3.82		14.00	Pass
HE20	MCS0	2	97	6435	26RU/0	-3.21	-3.90	-0.53	-4.19		-4.72		14.00	Pass
HE20	MCS0	2	97	6435	52RU/37	-0.08	-0.84	2.57	-4.19		-1.62		14.00	Pass
HE20	MCS0	2	97	6435	106RU/53	2.64	2.07	5.37	-4.19		1.18		14.00	Pass
HE20	MCS0	2	105	6475	Full	5.30	4.91	8.12	-4.19		3.93		14.00	Pass
HE20	MCS0	2	105	6475	26RU/4	-1.46	-2.07	1.26	-4.19		-2.93		14.00	Pass
HE20	MCS0	2	105	6475	52RU/38	-0.24	-0.61	2.59	-4.19		-1.60		14.00	Pass
HE20	MCS0	2	105	6475	106RU/53	2.91	2.42	5.68	-4.19		1.49		14.00	Pass
HE20	MCS0	2	113	6515	Full	5.10	4.12	7.65	-4.19		3.46		14.00	Pass
HE20	MCS0	2	113	6515	26RU/8	-3.69	-4.24	-0.95	-4.19		-5.14		14.00	Pass
HE20	MCS0	2	113	6515	52RU/40	-0.56	-1.14	2.17	-4.19		-2.02		14.00	Pass
HE20	MCS0	2	113	6515	106RU/54	2.26	1.67	4.99	-4.19		0.80		14.00	Pass
HE40	MCS0	2	99	6445	Full	7.45	7.47	10.47	-4.19		6.28		14.00	Pass
HE40	MCS0	2	107	6485	Full	7.50	7.45	10.49	-4.19		6.30		14.00	Pass
HE80	MCS0	2	103	6465	Full	9.75	9.80	12.79	-4.19		8.60		14.00	Pass

U-NII-6 Straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
						Power			(dBi)		Power			
						(dBm)					(dBm)			
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE40	MCS0	2	115	6525	Full	7.06	7.07	10.08	-4.06		6.02		14.00	Pass
HE80	MCS0	2	119	6545	Full	9.80	10.00	12.91	-4.06		8.85		14.00	Pass



U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
						Power			(dBi)		Power			
						(dBm)					(dBm)			
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	117	6535	Full	4.21	3.98	7.11	-4.06		3.05		14.00	Pass
HE20	MCS0	2	117	6535	26RU/0	-4.48	-4.25	-1.35	-4.06		-5.41		14.00	Pass
HE20	MCS0	2	117	6535	52RU/37	-1.40	-1.14	1.74	-4.06		-2.32		14.00	Pass
HE20	MCS0	2	117	6535	106RU/53	1.09	1.64	4.38	-4.06		0.32		14.00	Pass
HE20	MCS0	2	149	6695	Full	4.13	4.35	7.25	-4.06		3.19		14.00	Pass
HE20	MCS0	2	149	6695	26RU/4	-3.09	-3.12	-0.09	-4.06		-4.15		14.00	Pass
HE20	MCS0	2	149	6695	52RU/38	-1.39	-1.18	1.73	-4.06		-2.33		14.00	Pass
HE20	MCS0	2	149	6695	106RU/53	1.67	1.85	4.77	-4.06		0.71		14.00	Pass
HE20	MCS0	2	181	6855	Full	4.01	4.24	7.14	-4.06		3.08		14.00	Pass
HE20	MCS0	2	181	6855	26RU/8	-4.21	-4.59	-1.39	-4.06		-5.45		14.00	Pass
HE20	MCS0	2	181	6855	52RU/40	-1.19	-1.06	1.89	-4.06		-2.17		14.00	Pass
HE20	MCS0	2	181	6855	106RU/54	1.94	1.72	4.84	-4.06		0.78		14.00	Pass
HE40	MCS0	2	123	6565	Full	7.08	7.50	10.31	-4.06		6.25		14.00	Pass
HE40	MCS0	2	147	6685	Full	6.87	7.36	10.13	-4.06		6.07		14.00	Pass
HE40	MCS0	2	179	6845	Full	7.38	7.02	10.21	-4.06		6.15		14.00	Pass
HE80	MCS0	2	135	6625	Full	9.48	10.00	12.76	-4.06		8.70		14.00	Pass
HE80	MCS0	2	151	6705	Full	9.23	9.97	12.63	-4.06		8.57		14.00	Pass
HE80	MCS0	2	167	6785	Full	9.27	8.80	12.05	-4.06		7.99		14.00	Pass



U-NII-7 Straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	185	6875	Full	3.78	4.20	7.01	-4.06		2.95		14.00	Pass
HE20	MCS0	2	185	6875	26RU/8	-4.53	-4.47	-1.49	-4.06		-5.55		14.00	Pass
HE20	MCS0	2	185	6875	52RU/40	-2.09	-1.97	0.98	-4.06		-3.08		14.00	Pass
HE20	MCS0	2	185	6875	106RU/54	1.22	1.22	4.23	-4.06		0.17		14.00	Pass
HE40	MCS0	2	187	6885	Full	7.35	7.05	10.21	-4.06		6.15		14.00	Pass
HE80	MCS0	2	183	6865	Full	9.46	9.44	12.46	-4.06		8.40		14.00	Pass



U-NII-8 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	189	6895	Full	7.91	7.90	10.92	-6.53		4.39		14.00	Pass
HE20	MCS0	2	189	6895	26RU/0	-0.63	-0.74	2.33	-6.53		-4.20		14.00	Pass
HE20	MCS0	2	189	6895	52RU/37	2.05	1.92	5.00	-6.53		-1.53		14.00	Pass
HE20	MCS0	2	189	6895	106RU/53	5.48	5.37	8.44	-6.53		1.91		14.00	Pass
HE20	MCS0	2	209	6995	Full	7.60	7.40	10.51	-6.53		3.98		14.00	Pass
HE20	MCS0	2	209	6995	26RU/4	0.11	-0.36	2.89	-6.53		-3.64		14.00	Pass
HE20	MCS0	2	209	6995	52RU/38	2.02	1.69	4.87	-6.53		-1.66		14.00	Pass
HE20	MCS0	2	209	6995	106RU/53	4.80	4.41	7.62	-6.53		1.09		14.00	Pass
HE20	MCS0	2	229	7095	Full	7.58	7.53	10.57	-6.53		4.04		14.00	Pass
HE20	MCS0	2	229	7095	26RU/8	-0.96	-1.26	1.90	-6.53		-4.63		14.00	Pass
HE20	MCS0	2	229	7095	52RU/40	2.19	1.79	5.00	-6.53		-1.53		14.00	Pass
HE20	MCS0	2	229	7095	106RU/54	5.22	4.88	8.06	-6.53		1.53		14.00	Pass
HE40	MCS0	2	195	6925	Full	9.94	10.30	13.13	-6.53		6.60		14.00	Pass
HE40	MCS0	2	211	7005	Full	9.80	10.20	13.01	-6.53		6.48		14.00	Pass
HE40	MCS0	2	227	7085	Full	10.46	10.47	13.48	-6.53		6.95		14.00	Pass
HE80	MCS0	2	199	6945	Full	12.90	12.76	15.84	-6.53		9.31		14.00	Pass
HE80	MCS0	2	215	7025	Full	13.00	12.33	15.69	-6.53		9.16		14.00	Pass

**SDM Mode**

U-NII-5 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	01	5955	4.39	5.50	7.99	-3.01		4.98		14.00	Pass
11a	6M	2	49	6195	5.41	5.43	8.43	-3.01		5.42		14.00	Pass
11a	6M	2	93	6415	5.11	5.26	8.20	-3.01		5.19		14.00	Pass

U-NII-6 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	97	6435	6.70	6.19	9.46	-4.19		5.27		14.00	Pass
11a	6M	2	105	6475	6.90	6.43	9.68	-4.19		5.49		14.00	Pass
11a	6M	2	113	6515	6.60	5.87	9.26	-4.19		5.07		14.00	Pass



U-NII-7 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	117	6535	6.66	6.62	9.65	-4.06		5.59		14.00	Pass
11a	6M	2	149	6695	6.59	6.78	9.70	-4.06		5.64		14.00	Pass
11a	6M	2	181	6855	5.98	6.60	9.31	-4.06		5.25		14.00	Pass

U-NII-7 Straddle channel MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
					Power			(dBi)		Power (dBm)			
					(dBm)								
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	185	6875	6.83	6.52	9.69	-4.06		5.63		14.00	Pass

U-NII-8 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	189	6895	8.72	8.65	11.70	-6.53		5.17		14.00	Pass
11a	6M	2	209	6995	8.61	8.40	11.52	-6.53		4.99		14.00	Pass
11a	6M	2	229	7095	9.15	9.06	12.12	-6.53		5.59		14.00	Pass



U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	01	5955	Full	5.04	6.41	8.79	-3.01		5.78		14.00	Pass
HE20	MCS0	2	01	5955	26RU/0	-2.63	-1.87	0.78	-3.01		-2.23		14.00	Pass
HE20	MCS0	2	01	5955	52RU/37	0.04	0.57	3.32	-3.01		0.31		14.00	Pass
HE20	MCS0	2	01	5955	106RU/53	3.14	4.03	6.62	-3.01		3.61		14.00	Pass
HE20	MCS0	2	49	6195	Full	6.13	6.04	9.10	-3.01		6.09		14.00	Pass
HE20	MCS0	2	49	6195	26RU/4	-1.42	-1.49	1.56	-3.01		-1.45		14.00	Pass
HE20	MCS0	2	49	6195	52RU/38	0.70	0.68	3.70	-3.01		0.69		14.00	Pass
HE20	MCS0	2	49	6195	106RU/53	3.59	3.58	6.60	-3.01		3.59		14.00	Pass
HE20	MCS0	2	93	6415	Full	5.95	6.12	9.05	-3.01		6.04		14.00	Pass
HE20	MCS0	2	93	6415	26RU/8	-2.49	-2.26	0.64	-3.01		-2.37		14.00	Pass
HE20	MCS0	2	93	6415	52RU/40	0.52	0.67	3.61	-3.01		0.60		14.00	Pass
HE20	MCS0	2	93	6415	106RU/54	3.35	4.12	6.76	-3.01		3.75		14.00	Pass
HE40	MCS0	2	03	5965	Full	8.85	9.50	12.20	-3.01		9.19		14.00	Pass
HE40	MCS0	2	51	6205	Full	9.03	8.50	11.78	-3.01		8.77		14.00	Pass
HE40	MCS0	2	91	6405	Full	8.63	9.14	11.90	-3.01		8.89		14.00	Pass
HE80	MCS0	2	07	5985	Full	10.46	12.00	14.31	-3.01		11.30		14.00	Pass
HE80	MCS0	2	55	6225	Full	11.32	11.60	14.47	-3.01		11.46		14.00	Pass
HE80	MCS0	2	87	6385	Full	11.20	11.90	14.57	-3.01		11.56		14.00	Pass



U-NII-6 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	97	6435	Full	6.99	6.46	9.74	-4.19		5.55		14.00	Pass
HE20	MCS0	2	97	6435	26RU/0	-0.86	-1.44	1.87	-4.19		-2.32		14.00	Pass
HE20	MCS0	2	97	6435	52RU/37	1.88	1.34	4.63	-4.19		0.44		14.00	Pass
HE20	MCS0	2	97	6435	106RU/53	4.59	4.02	7.32	-4.19		3.13		14.00	Pass
HE20	MCS0	2	105	6475	Full	7.50	7.26	10.39	-4.19		6.20		14.00	Pass
HE20	MCS0	2	105	6475	26RU/4	0.41	-0.20	3.13	-4.19		-1.06		14.00	Pass
HE20	MCS0	2	105	6475	52RU/38	1.90	1.46	4.70	-4.19		0.51		14.00	Pass
HE20	MCS0	2	105	6475	106RU/53	5.29	4.88	8.10	-4.19		3.91		14.00	Pass
HE20	MCS0	2	113	6515	Full	7.18	6.52	9.87	-4.19		5.68		14.00	Pass
HE20	MCS0	2	113	6515	26RU/8	-1.24	-1.72	1.54	-4.19		-2.65		14.00	Pass
HE20	MCS0	2	113	6515	52RU/40	1.56	0.89	4.25	-4.19		0.06		14.00	Pass
HE20	MCS0	2	113	6515	106RU/54	4.71	4.09	7.42	-4.19		3.23		14.00	Pass
HE40	MCS0	2	99	6445	Full	10.14	10.19	13.18	-4.19		8.99		14.00	Pass
HE40	MCS0	2	107	6485	Full	10.33	9.86	13.11	-4.19		8.92		14.00	Pass
HE80	MCS0	2	103	6465	Full	13.00	12.26	15.66	-4.19		11.47		14.00	Pass

U-NII-6 Straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE40	MCS0	2	115	6525	Full	9.73	9.70	12.73	-4.06		8.67		14.00	Pass
HE80	MCS0	2	119	6545	Full	12.90	12.54	15.73	-4.06		11.67		14.00	Pass



U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	117	6535	Full	7.50	7.40	10.46	-4.06		6.40		14.00	Pass
HE20	MCS0	2	117	6535	26RU/0	-1.10	-1.24	1.84	-4.06		-2.22		14.00	Pass
HE20	MCS0	2	117	6535	52RU/37	2.03	1.98	5.02	-4.06		0.96		14.00	Pass
HE20	MCS0	2	117	6535	106RU/53	4.58	5.09	7.85	-4.06		3.79		14.00	Pass
HE20	MCS0	2	149	6695	Full	6.95	7.07	10.02	-4.06		5.96		14.00	Pass
HE20	MCS0	2	149	6695	26RU/4	-0.35	-0.17	2.75	-4.06		-1.31		14.00	Pass
HE20	MCS0	2	149	6695	52RU/38	1.20	1.41	4.32	-4.06		0.26		14.00	Pass
HE20	MCS0	2	149	6695	106RU/53	4.55	4.75	7.66	-4.06		3.60		14.00	Pass
HE20	MCS0	2	181	6855	Full	6.77	6.57	9.68	-4.06		5.62		14.00	Pass
HE20	MCS0	2	181	6855	26RU/8	-1.99	-1.84	1.10	-4.06		-2.96		14.00	Pass
HE20	MCS0	2	181	6855	52RU/40	1.24	0.90	4.08	-4.06		0.02		14.00	Pass
HE20	MCS0	2	181	6855	106RU/54	3.85	4.12	7.00	-4.06		2.94		14.00	Pass
HE40	MCS0	2	123	6565	Full	10.30	10.19	13.26	-4.06		9.20		14.00	Pass
HE40	MCS0	2	147	6685	Full	9.64	10.02	12.84	-4.06		8.78		14.00	Pass
HE40	MCS0	2	179	6845	Full	10.10	9.32	12.74	-4.06		8.68		14.00	Pass
HE80	MCS0	2	135	6625	Full	13.00	12.70	15.86	-4.06		11.80		14.00	Pass
HE80	MCS0	2	151	6705	Full	12.89	12.87	15.89	-4.06		11.83		14.00	Pass
HE80	MCS0	2	167	6785	Full	13.00	11.93	15.51	-4.06		11.45		14.00	Pass



U-NII-7 Straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted			DG (dBi)		EIRP		EIRP Power Limit (dBm)	Pass /Fail
						Power					Power			
						(dBm)			(dBm)					
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	185	6875	Full	6.60	6.74	9.68	-4.06		5.62		14.00	Pass
HE20	MCS0	2	185	6875	26RU/8	-1.68	-1.69	1.33	-4.06		-2.73		14.00	Pass
HE20	MCS0	2	185	6875	52RU/40	1.00	1.07	4.05	-4.06		-0.01		14.00	Pass
HE20	MCS0	2	185	6875	106RU/54	4.04	4.35	7.21	-4.06		3.15		14.00	Pass
HE40	MCS0	2	187	6885	Full	10.13	9.93	13.04	-4.06		8.98		14.00	Pass
HE80	MCS0	2	183	6865	Full	12.90	12.14	15.55	-4.06		11.49		14.00	Pass



U-NII-8 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Conducted			DG		EIRP		EIRP Power Limit (dBm)	Pass /Fail
						Power (dBm)			(dBi)		Power (dBm)			
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	189	6895	Full	9.36	9.39	12.39	-6.53		5.86		14.00	Pass
HE20	MCS0	2	189	6895	26RU/0	1.31	1.21	4.27	-6.53		-2.26		14.00	Pass
HE20	MCS0	2	189	6895	52RU/37	4.28	4.30	7.30	-6.53		0.77		14.00	Pass
HE20	MCS0	2	189	6895	106RU/53	7.18	7.20	10.20	-6.53		3.67		14.00	Pass
HE20	MCS0	2	209	6995	Full	9.24	9.03	12.15	-6.53		5.62		14.00	Pass
HE20	MCS0	2	209	6995	26RU/4	2.12	1.66	4.91	-6.53		-1.62		14.00	Pass
HE20	MCS0	2	209	6995	52RU/38	3.74	3.51	6.64	-6.53		0.11		14.00	Pass
HE20	MCS0	2	209	6995	106RU/53	6.68	6.46	9.58	-6.53		3.05		14.00	Pass
HE20	MCS0	2	229	7095	Full	9.82	9.77	12.81	-6.53		6.28		14.00	Pass
HE20	MCS0	2	229	7095	26RU/8	2.73	2.70	5.73	-6.53		-0.80		14.00	Pass
HE20	MCS0	2	229	7095	52RU/40	4.40	4.23	7.33	-6.53		0.80		14.00	Pass
HE20	MCS0	2	229	7095	106RU/54	7.02	6.80	9.92	-6.53		3.39		14.00	Pass
HE40	MCS0	2	195	6925	Full	12.90	12.28	15.61	-6.53		9.08		14.00	Pass
HE40	MCS0	2	211	7005	Full	12.80	12.20	15.52	-6.53		8.99		14.00	Pass
HE40	MCS0	2	227	7085	Full	13.00	12.19	15.62	-6.53		9.09		14.00	Pass
HE80	MCS0	2	199	6945	Full	15.50	15.20	18.36	-6.53		11.83		14.00	Pass
HE80	MCS0	2	215	7025	Full	15.40	14.70	18.07	-6.53		11.54		14.00	Pass



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

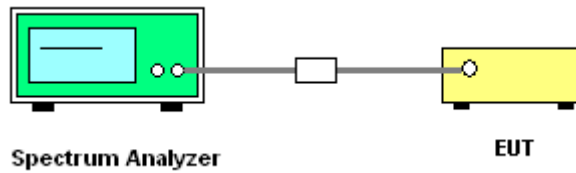

3.3.5 Test Result of Power Spectral Density

MIMO <Ant. 4+3>
CDD Mode

U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		Pass /Fail
					Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	
11a	6M	2	01	5955	0.02	0.02	-		-4.13	-1.07		-5.20		Pass
11a	6M	2	49	6195	0.02	0.02	-		-4.32	-1.07		-5.39		Pass
11a	6M	2	93	6415	0.02	0.02	-		-3.95	-1.07		-5.02		Pass

U-NII-6 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		Pass /Fail
					Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	
11a	6M	2	97	6435	0.02	0.02	-		-3.69	-1.68		-5.37		Pass
11a	6M	2	105	6475	0.02	0.02	-		-3.47	-1.68		-5.15		Pass
11a	6M	2	113	6515	0.02	0.02	-		-3.61	-1.68		-5.29		Pass



U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	117	6535	0.02	0.02	-	-4.18	-1.08		-5.26		-5.00	Pass
11a	6M	2	149	6695	0.02	0.02	-	-4.13	-1.08		-5.21		-5.00	Pass
11a	6M	2	181	6855	0.02	0.02	-	-4.18	-1.08		-5.26		-5.00	Pass

U-NII-7 Straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	185	6875	0.02	0.02	-	-4.18	-1.08		-5.26		-5.00	Pass

U-NII-8 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	189	6895	0.02	0.02	-	-0.96	-4.12		-5.08		-5.00	Pass
11a	6M	2	209	6995	0.02	0.02	-	-1.13	-4.12		-5.25		-5.00	Pass
11a	6M	2	229	7095	0.02	0.02	-	-1.08	-4.12		-5.20		-5.00	Pass



U-NII-5 MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	01	5955	Full	0.03	0.03	-	-4.32	-1.07	-5.39	-5.00	Pass			
HE20	MCS0	2	01	5955	26RU/0	0.09	0.09	-	-4.44	-1.07	-5.51	-5.00	Pass			
HE20	MCS0	2	01	5955	52RU/37	0.09	0.09	-	-4.70	-1.07	-5.77	-5.00	Pass			
HE20	MCS0	2	01	5955	106RU/53	0.10	0.10	-	-4.38	-1.07	-5.45	-5.00	Pass			
HE20	MCS0	2	49	6195	Full	0.03	0.03	-	-4.33	-1.07	-5.40	-5.00	Pass			
HE20	MCS0	2	49	6195	26RU/4	0.09	0.09	-	-4.68	-1.07	-5.75	-5.00	Pass			
HE20	MCS0	2	49	6195	52RU/38	0.09	0.09	-	-4.49	-1.07	-5.56	-5.00	Pass			
HE20	MCS0	2	49	6195	106RU/53	0.10	0.10	-	-4.53	-1.07	-5.60	-5.00	Pass			
HE20	MCS0	2	93	6415	Full	0.03	0.03	-	-4.12	-1.07	-5.19	-5.00	Pass			
HE20	MCS0	2	93	6415	26RU/8	0.09	0.09	-	-4.23	-1.07	-5.30	-5.00	Pass			
HE20	MCS0	2	93	6415	52RU/40	0.09	0.09	-	-4.41	-1.07	-5.48	-5.00	Pass			
HE20	MCS0	2	93	6415	106RU/54	0.10	0.10	-	-4.22	-1.07	-5.29	-5.00	Pass			
HE40	MCS0	2	03	5965	Full	0.06	0.06	-	-4.36	-1.07	-5.43	-5.00	Pass			
HE40	MCS0	2	51	6205	Full	0.06	0.06	-	-3.99	-1.07	-5.06	-5.00	Pass			
HE40	MCS0	2	91	6405	Full	0.06	0.06	-	-4.13	-1.07	-5.20	-5.00	Pass			
HE80	MCS0	2	07	5985	Full	0.12	0.12	-	-4.22	-1.07	-5.29	-5.00	Pass			
HE80	MCS0	2	55	6225	Full	0.12	0.12	-	-4.40	-1.07	-5.47	-5.00	Pass			
HE80	MCS0	2	87	6385	Full	0.12	0.12	-	-3.93	-1.07	-5.00	-5.00	Pass			



U-NII-6 MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	97	6435	Full	0.03	0.03	-		-3.57	-1.68		-5.25		-5.00	Pass
HE20	MCS0	2	97	6435	26RU/0	0.09	0.09	-		-3.72	-1.68		-5.40		-5.00	Pass
HE20	MCS0	2	97	6435	52RU/37	0.09	0.09	-		-3.77	-1.68		-5.45		-5.00	Pass
HE20	MCS0	2	97	6435	106RU/53	0.10	0.10	-		-3.67	-1.68		-5.35		-5.00	Pass
HE20	MCS0	2	105	6475	Full	0.03	0.03	-		-3.35	-1.68		-5.03		-5.00	Pass
HE20	MCS0	2	105	6475	26RU/4	0.09	0.09	-		-3.46	-1.68		-5.14		-5.00	Pass
HE20	MCS0	2	105	6475	52RU/38	0.09	0.09	-		-3.68	-1.68		-5.36		-5.00	Pass
HE20	MCS0	2	105	6475	106RU/53	0.10	0.10	-		-3.75	-1.68		-5.43		-5.00	Pass
HE20	MCS0	2	113	6515	Full	0.03	0.03	-		-3.63	-1.68		-5.31		-5.00	Pass
HE20	MCS0	2	113	6515	26RU/8	0.09	0.09	-		-3.85	-1.68		-5.53		-5.00	Pass
HE20	MCS0	2	113	6515	52RU/40	0.09	0.09	-		-3.64	-1.68		-5.32		-5.00	Pass
HE20	MCS0	2	113	6515	106RU/54	0.10	0.10	-		-3.94	-1.68		-5.62		-5.00	Pass
HE40	MCS0	2	99	6445	Full	0.06	0.06	-		-3.70	-1.68		-5.38		-5.00	Pass
HE40	MCS0	2	107	6485	Full	0.06	0.06	-		-3.40	-1.68		-5.08		-5.00	Pass
HE80	MCS0	2	103	6465	Full	0.12	0.12	-		-3.87	-1.68		-5.55		-5.00	Pass

U-NII-6 Straddle channel MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE40	MCS0	2	115	6525	Full	0.06	0.06	-		-4.12	-1.08		-5.20		-5.00	Pass
HE80	MCS0	2	119	6545	Full	0.12	0.12	-		-3.92	-1.08		-5.00		-5.00	Pass



U-NII-7 MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	117	6535	Full	0.03	0.03	-	-4.36	-1.08	-5.44	-5.00	Pass			
HE20	MCS0	2	117	6535	26RU/0	0.09	0.09	-	-4.47	-1.08	-5.55	-5.00	Pass			
HE20	MCS0	2	117	6535	52RU/37	0.09	0.09	-	-4.39	-1.08	-5.47	-5.00	Pass			
HE20	MCS0	2	117	6535	106RU/53	0.10	0.10	-	-4.44	-1.08	-5.52	-5.00	Pass			
HE20	MCS0	2	149	6695	Full	0.03	0.03	-	-4.19	-1.08	-5.27	-5.00	Pass			
HE20	MCS0	2	149	6695	26RU/4	0.09	0.09	-	-4.40	-1.08	-5.48	-5.00	Pass			
HE20	MCS0	2	149	6695	52RU/38	0.09	0.09	-	-4.42	-1.08	-5.50	-5.00	Pass			
HE20	MCS0	2	149	6695	106RU/53	0.10	0.10	-	-4.52	-1.08	-5.60	-5.00	Pass			
HE20	MCS0	2	181	6855	Full	0.03	0.03	-	-3.98	-1.08	-5.06	-5.00	Pass			
HE20	MCS0	2	181	6855	26RU/8	0.09	0.09	-	-4.33	-1.08	-5.41	-5.00	Pass			
HE20	MCS0	2	181	6855	52RU/40	0.09	0.09	-	-4.27	-1.08	-5.35	-5.00	Pass			
HE20	MCS0	2	181	6855	106RU/54	0.10	0.10	-	-4.13	-1.08	-5.21	-5.00	Pass			
HE40	MCS0	2	123	6565	Full	0.06	0.06	-	-3.94	-1.08	-5.02	-5.00	Pass			
HE40	MCS0	2	147	6685	Full	0.06	0.06	-	-4.12	-1.08	-5.20	-5.00	Pass			
HE40	MCS0	2	179	6845	Full	0.06	0.06	-	-4.08	-1.08	-5.16	-5.00	Pass			
HE80	MCS0	2	135	6625	Full	0.12	0.12	-	-4.06	-1.08	-5.14	-5.00	Pass			
HE80	MCS0	2	151	6705	Full	0.12	0.12	-	-4.10	-1.08	-5.18	-5.00	Pass			
HE80	MCS0	2	167	6785	Full	0.12	0.12	-	-4.30	-1.08	-5.38	-5.00	Pass			



U-NII-7 Straddle channel MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	185	6875	Full	0.03	0.03	-		-4.26	-1.08		-5.34		-5.00	Pass
HE20	MCS0	2	185	6875	26RU/8	0.09	0.09	-		-4.43	-1.08		-5.51		-5.00	Pass
HE20	MCS0	2	185	6875	52RU/40	0.09	0.09	-		-4.88	-1.08		-5.96		-5.00	Pass
HE20	MCS0	2	185	6875	106RU/54	0.10	0.10	-		-4.44	-1.08		-5.52		-5.00	Pass
HE40	MCS0	2	187	6885	Full	0.06	0.06	-		-4.12	-1.08		-5.20		-5.00	Pass
HE80	MCS0	2	183	6865	Full	0.12	0.12	-		-4.21	-1.08		-5.29		-5.00	Pass



U-NII-8 MIMO (CDD)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	189	6895	Full	0.03	0.03	-	-1.01	-4.12	-5.13	-5.00	Pass			
HE20	MCS0	2	189	6895	26RU/0	0.09	0.09	-	-1.05	-4.12	-5.17	-5.00	Pass			
HE20	MCS0	2	189	6895	52RU/37	0.09	0.09	-	-1.48	-4.12	-5.60	-5.00	Pass			
HE20	MCS0	2	189	6895	106RU/53	0.10	0.10	-	-1.15	-4.12	-5.27	-5.00	Pass			
HE20	MCS0	2	209	6995	Full	0.03	0.03	-	-1.08	-4.12	-5.20	-5.00	Pass			
HE20	MCS0	2	209	6995	26RU/4	0.09	0.09	-	-1.14	-4.12	-5.26	-5.00	Pass			
HE20	MCS0	2	209	6995	52RU/38	0.09	0.09	-	-1.11	-4.12	-5.23	-5.00	Pass			
HE20	MCS0	2	209	6995	106RU/53	0.10	0.10	-	-1.22	-4.12	-5.34	-5.00	Pass			
HE20	MCS0	2	229	7095	Full	0.03	0.03	-	-1.20	-4.12	-5.32	-5.00	Pass			
HE20	MCS0	2	229	7095	26RU/8	0.09	0.09	-	-1.36	-4.12	-5.48	-5.00	Pass			
HE20	MCS0	2	229	7095	52RU/40	0.09	0.09	-	-1.27	-4.12	-5.39	-5.00	Pass			
HE20	MCS0	2	229	7095	106RU/54	0.10	0.10	-	-1.32	-4.12	-5.44	-5.00	Pass			
HE40	MCS0	2	195	6925	Full	0.06	0.06	-	-1.22	-4.12	-5.34	-5.00	Pass			
HE40	MCS0	2	211	7005	Full	0.06	0.06	-	-1.16	-4.12	-5.28	-5.00	Pass			
HE40	MCS0	2	227	7085	Full	0.06	0.06	-	-1.16	-4.12	-5.28	-5.00	Pass			
HE80	MCS0	2	199	6945	Full	0.12	0.12	-	-1.06	-4.12	-5.18	-5.00	Pass			
HE80	MCS0	2	215	7025	Full	0.12	0.12	-	-0.96	-4.12	-5.08	-5.00	Pass			

**SDM Mode**

U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	01	5955	0.02	0.02	-	-2.29	-3.01		-5.30		-5.00	Pass
11a	6M	2	49	6195	0.02	0.02	-	-2.14	-3.01		-5.15		-5.00	Pass
11a	6M	2	93	6415	0.02	0.02	-	-2.26	-3.01		-5.27		-5.00	Pass

U-NII-6 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	97	6435	0.02	0.02	-	-0.92	-4.19		-5.11		-5.00	Pass
11a	6M	2	105	6475	0.02	0.02	-	-1.07	-4.19		-5.26		-5.00	Pass
11a	6M	2	113	6515	0.02	0.02	-	-1.20	-4.19		-5.39		-5.00	Pass



U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	117	6535	0.02	0.02	-	-1.13	-4.06		-5.19		-5.00	Pass
11a	6M	2	149	6695	0.02	0.02	-	-0.95	-4.06		-5.01		-5.00	Pass
11a	6M	2	181	6855	0.02	0.02	-	-1.27	-4.06		-5.33		-5.00	Pass

U-NII-7 Straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	185	6875	0.02	0.02	-	-1.00	-4.06		-5.06		-5.00	Pass

U-NII-8 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	189	6895	0.02	0.02	-	1.20	-6.53		-5.33		-5.00	Pass
11a	6M	2	209	6995	0.02	0.02	-	1.40	-6.53		-5.13		-5.00	Pass
11a	6M	2	229	7095	0.02	0.02	-	1.31	-6.53		-5.22		-5.00	Pass



U-NII-5 MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	01	5955	Full	0.03	0.03	-	-2.24	-3.01	-5.25	-5.00	Pass			
HE20	MCS0	2	01	5955	26RU/0	0.09	0.09	-	-2.51	-3.01	-5.52	-5.00	Pass			
HE20	MCS0	2	01	5955	52RU/37	0.09	0.09	-	-2.57	-3.01	-5.58	-5.00	Pass			
HE20	MCS0	2	01	5955	106RU/53	0.10	0.10	-	-2.44	-3.01	-5.45	-5.00	Pass			
HE20	MCS0	2	49	6195	Full	0.03	0.03	-	-2.01	-3.01	-5.02	-5.00	Pass			
HE20	MCS0	2	49	6195	26RU/4	0.09	0.09	-	-2.34	-3.01	-5.35	-5.00	Pass			
HE20	MCS0	2	49	6195	52RU/38	0.09	0.09	-	-2.08	-3.01	-5.09	-5.00	Pass			
HE20	MCS0	2	49	6195	106RU/53	0.10	0.10	-	-2.26	-3.01	-5.27	-5.00	Pass			
HE20	MCS0	2	93	6415	Full	0.03	0.03	-	-2.07	-3.01	-5.08	-5.00	Pass			
HE20	MCS0	2	93	6415	26RU/8	0.09	0.09	-	-2.23	-3.01	-5.24	-5.00	Pass			
HE20	MCS0	2	93	6415	52RU/40	0.09	0.09	-	-2.28	-3.01	-5.29	-5.00	Pass			
HE20	MCS0	2	93	6415	106RU/54	0.10	0.10	-	-2.54	-3.01	-5.55	-5.00	Pass			
HE40	MCS0	2	03	5965	Full	0.06	0.06	-	-2.00	-3.01	-5.01	-5.00	Pass			
HE40	MCS0	2	51	6205	Full	0.06	0.06	-	-2.16	-3.01	-5.17	-5.00	Pass			
HE40	MCS0	2	91	6405	Full	0.06	0.06	-	-2.09	-3.01	-5.10	-5.00	Pass			
HE80	MCS0	2	07	5985	Full	0.12	0.12	-	-2.35	-3.01	-5.36	-5.00	Pass			
HE80	MCS0	2	55	6225	Full	0.12	0.12	-	-2.19	-3.01	-5.20	-5.00	Pass			
HE80	MCS0	2	87	6385	Full	0.12	0.12	-	-2.19	-3.01	-5.20	-5.00	Pass			



U-NII-6 MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	97	6435	Full	0.03	0.03	-		-1.19	-4.19		-5.38		-5.00	Pass
HE20	MCS0	2	97	6435	26RU/0	0.09	0.09	-		-1.30	-4.19		-5.49		-5.00	Pass
HE20	MCS0	2	97	6435	52RU/37	0.09	0.09	-		-1.42	-4.19		-5.61		-5.00	Pass
HE20	MCS0	2	97	6435	106RU/53	0.10	0.10	-		-1.59	-4.19		-5.78		-5.00	Pass
HE20	MCS0	2	105	6475	Full	0.03	0.03	-		-0.95	-4.19		-5.14		-5.00	Pass
HE20	MCS0	2	105	6475	26RU/4	0.09	0.09	-		-1.10	-4.19		-5.29		-5.00	Pass
HE20	MCS0	2	105	6475	52RU/38	0.09	0.09	-		-1.35	-4.19		-5.54		-5.00	Pass
HE20	MCS0	2	105	6475	106RU/53	0.10	0.10	-		-1.07	-4.19		-5.26		-5.00	Pass
HE20	MCS0	2	113	6515	Full	0.03	0.03	-		-1.02	-4.19		-5.21		-5.00	Pass
HE20	MCS0	2	113	6515	26RU/8	0.09	0.09	-		-1.30	-4.19		-5.49		-5.00	Pass
HE20	MCS0	2	113	6515	52RU/40	0.09	0.09	-		-1.23	-4.19		-5.42		-5.00	Pass
HE20	MCS0	2	113	6515	106RU/54	0.10	0.10	-		-1.15	-4.19		-5.34		-5.00	Pass
HE40	MCS0	2	99	6445	Full	0.06	0.06	-		-0.90	-4.19		-5.09		-5.00	Pass
HE40	MCS0	2	107	6485	Full	0.06	0.06	-		-1.01	-4.19		-5.20		-5.00	Pass
HE80	MCS0	2	103	6465	Full	0.12	0.12	-		-0.84	-4.19		-5.03		-5.00	Pass

U-NII-6 Straddle channel MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE40	MCS0	2	115	6525	Full	0.06	0.06	-		-1.24	-4.06		-5.30		-5.00	Pass
HE80	MCS0	2	119	6545	Full	0.12	0.12	-		-0.97	-4.06		-5.03		-5.00	Pass



U-NII-7 MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	117	6535	Full	0.03	0.03	-	-0.96	-4.06	-5.02	-5.00	Pass			
HE20	MCS0	2	117	6535	26RU/0	0.09	0.09	-	-1.29	-4.06	-5.35	-5.00	Pass			
HE20	MCS0	2	117	6535	52RU/37	0.09	0.09	-	-1.06	-4.06	-5.12	-5.00	Pass			
HE20	MCS0	2	117	6535	106RU/53	0.10	0.10	-	-1.13	-4.06	-5.19	-5.00	Pass			
HE20	MCS0	2	149	6695	Full	0.03	0.03	-	-1.30	-4.06	-5.36	-5.00	Pass			
HE20	MCS0	2	149	6695	26RU/4	0.09	0.09	-	-1.39	-4.06	-5.45	-5.00	Pass			
HE20	MCS0	2	149	6695	52RU/38	0.09	0.09	-	-1.70	-4.06	-5.76	-5.00	Pass			
HE20	MCS0	2	149	6695	106RU/53	0.10	0.10	-	-1.48	-4.06	-5.54	-5.00	Pass			
HE20	MCS0	2	181	6855	Full	0.03	0.03	-	-1.28	-4.06	-5.34	-5.00	Pass			
HE20	MCS0	2	181	6855	26RU/8	0.09	0.09	-	-1.74	-4.06	-5.80	-5.00	Pass			
HE20	MCS0	2	181	6855	52RU/40	0.09	0.09	-	-1.47	-4.06	-5.53	-5.00	Pass			
HE20	MCS0	2	181	6855	106RU/54	0.10	0.10	-	-1.65	-4.06	-5.71	-5.00	Pass			
HE40	MCS0	2	123	6565	Full	0.06	0.06	-	-1.10	-4.06	-5.16	-5.00	Pass			
HE40	MCS0	2	147	6685	Full	0.06	0.06	-	-1.15	-4.06	-5.21	-5.00	Pass			
HE40	MCS0	2	179	6845	Full	0.06	0.06	-	-1.40	-4.06	-5.46	-5.00	Pass			
HE80	MCS0	2	135	6625	Full	0.12	0.12	-	-1.02	-4.06	-5.08	-5.00	Pass			
HE80	MCS0	2	151	6705	Full	0.12	0.12	-	-1.03	-4.06	-5.09	-5.00	Pass			
HE80	MCS0	2	167	6785	Full	0.12	0.12	-	-1.02	-4.06	-5.08	-5.00	Pass			



U-NII-7 Straddle channel MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	185	6875	Full	0.03	0.03	-		-1.34	-4.06		-5.40		-5.00	Pass
HE20	MCS0	2	185	6875	26RU/8	0.09	0.09	-		-1.56	-4.06		-5.62		-5.00	Pass
HE20	MCS0	2	185	6875	52RU/40	0.09	0.09	-		-1.80	-4.06		-5.86		-5.00	Pass
HE20	MCS0	2	185	6875	106RU/54	0.10	0.10	-		-1.36	-4.06		-5.42		-5.00	Pass
HE40	MCS0	2	187	6885	Full	0.06	0.06	-		-0.98	-4.06		-5.04		-5.00	Pass
HE80	MCS0	2	183	6865	Full	0.12	0.12	-		-1.09	-4.06		-5.15		-5.00	Pass



U-NII-8 MIMO (SDM)																
Mod.	Data Rate	NTX	CH.	Freq (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	189	6895	Full	0.03	0.03	-		1.49	-6.53		-5.04		-5.00	Pass
HE20	MCS0	2	189	6895	26RU/0	0.09	0.09	-		1.28	-6.53		-5.25		-5.00	Pass
HE20	MCS0	2	189	6895	52RU/37	0.09	0.09	-		1.45	-6.53		-5.08		-5.00	Pass
HE20	MCS0	2	189	6895	106RU/53	0.10	0.10	-		1.29	-6.53		-5.24		-5.00	Pass
HE20	MCS0	2	209	6995	Full	0.03	0.03	-		1.45	-6.53		-5.08		-5.00	Pass
HE20	MCS0	2	209	6995	26RU/4	0.09	0.09	-		1.44	-6.53		-5.09		-5.00	Pass
HE20	MCS0	2	209	6995	52RU/38	0.09	0.09	-		1.27	-6.53		-5.26		-5.00	Pass
HE20	MCS0	2	209	6995	106RU/53	0.10	0.10	-		1.02	-6.53		-5.51		-5.00	Pass
HE20	MCS0	2	229	7095	Full	0.03	0.03	-		1.28	-6.53		-5.25		-5.00	Pass
HE20	MCS0	2	229	7095	26RU/8	0.09	0.09	-		1.14	-6.53		-5.39		-5.00	Pass
HE20	MCS0	2	229	7095	52RU/40	0.09	0.09	-		1.17	-6.53		-5.36		-5.00	Pass
HE20	MCS0	2	229	7095	106RU/54	0.10	0.10	-		1.04	-6.53		-5.49		-5.00	Pass
HE40	MCS0	2	195	6925	Full	0.06	0.06	-		1.49	-6.53		-5.04		-5.00	Pass
HE40	MCS0	2	211	7005	Full	0.06	0.06	-		1.45	-6.53		-5.08		-5.00	Pass
HE40	MCS0	2	227	7085	Full	0.06	0.06	-		1.53	-6.53		-5.00		-5.00	Pass
HE80	MCS0	2	199	6945	Full	0.12	0.12	-		1.51	-6.53		-5.02		-5.00	Pass
HE80	MCS0	2	215	7025	Full	0.12	0.12	-		1.36	-6.53		-5.17		-5.00	Pass




3.3.6 Test Plot of Power Spectral Density

MIMO <Ant. 4+3>

CDD Mode


<802.11a>

Maximum Power Density Plot (dBm/MHz)

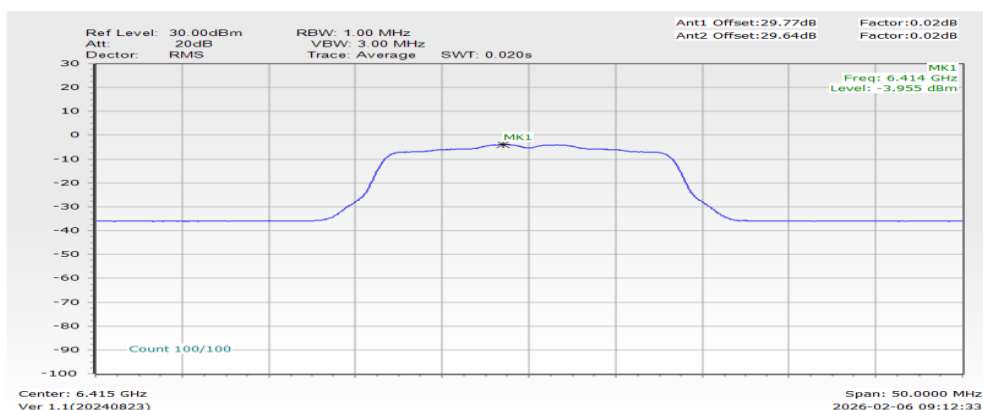
**Note:**

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

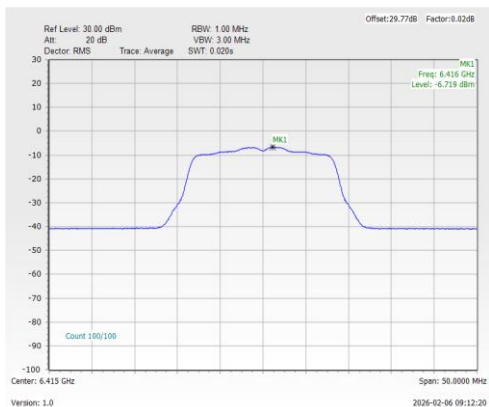


Power Density Plot Trace 2 (Ant 3)

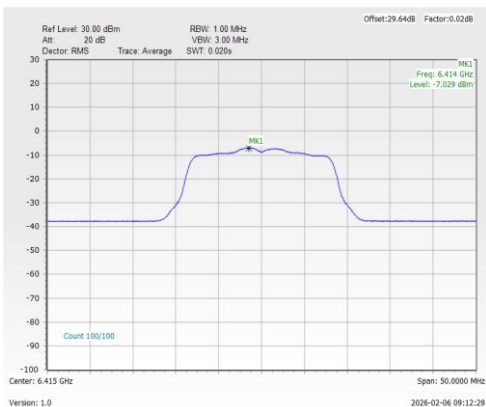



<802.11ax HE20>


Maximum Power Density Plot (dBm/MHz)

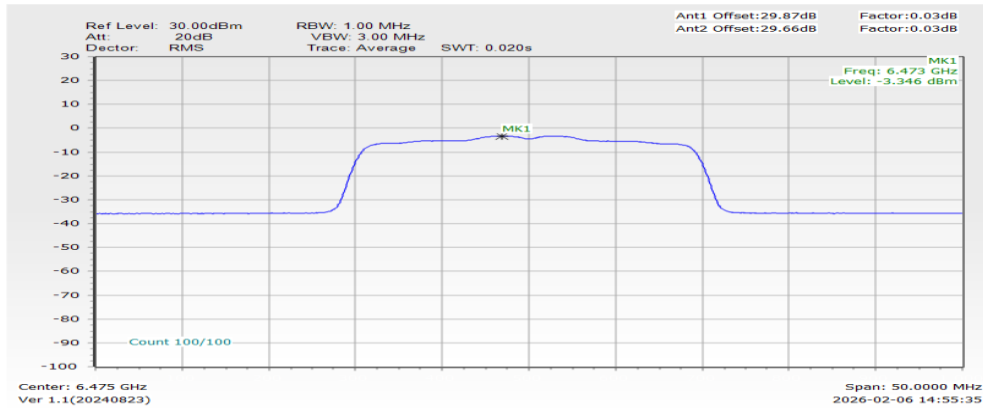


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

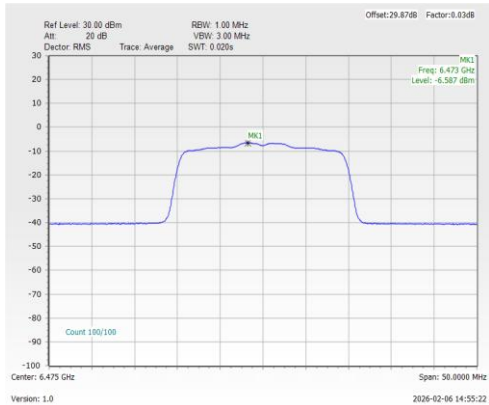


Power Density Plot Trace 2 (Ant 3)

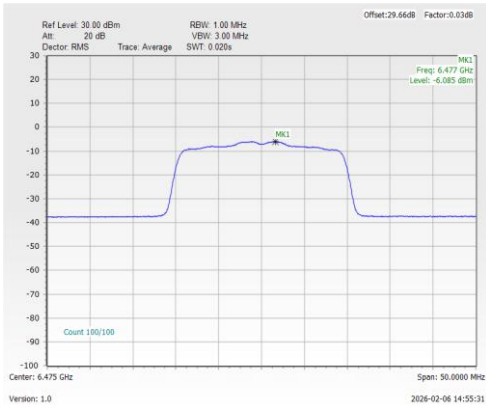



<802.11ax HE40>


Maximum Power Density Plot (dBm/MHz)

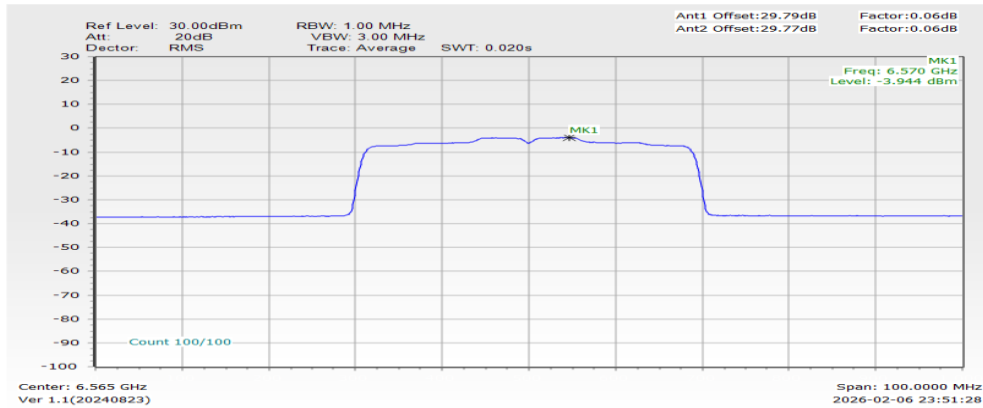


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

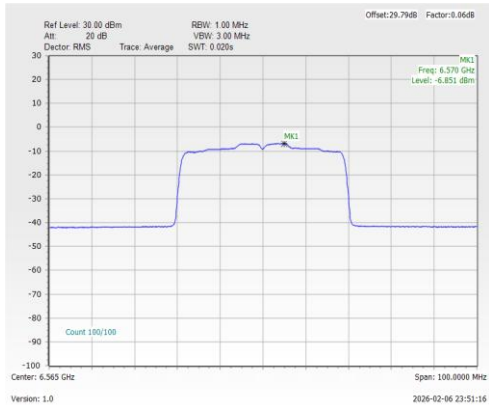


Power Density Plot Trace 2 (Ant 3)

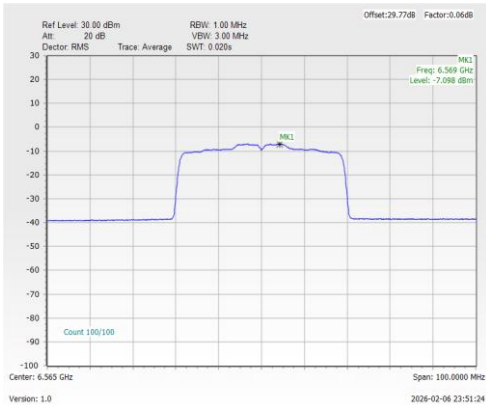



<802.11ax HE80>


Maximum Power Density Plot (dBm/MHz)

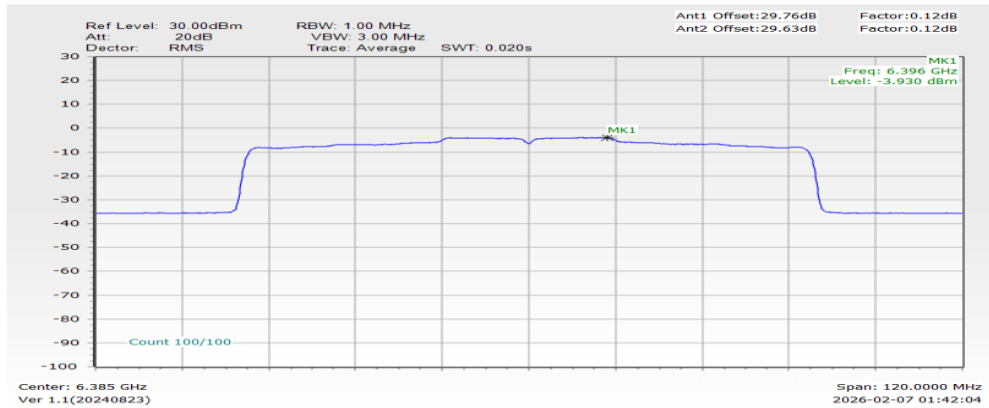


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

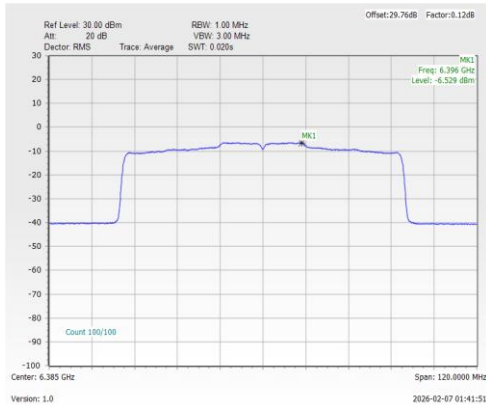

Power Density Plot Trace 2 (Ant 3)

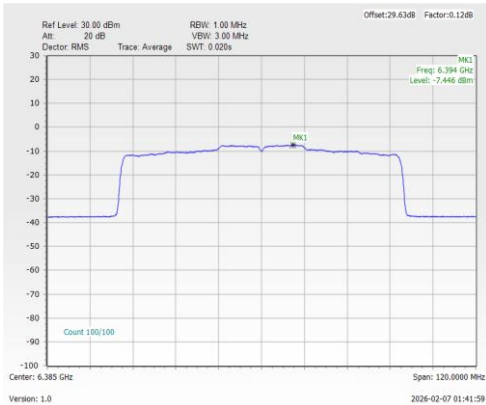




SDM Mode

<802.11a>


Maximum Power Density Plot (dBm/MHz)

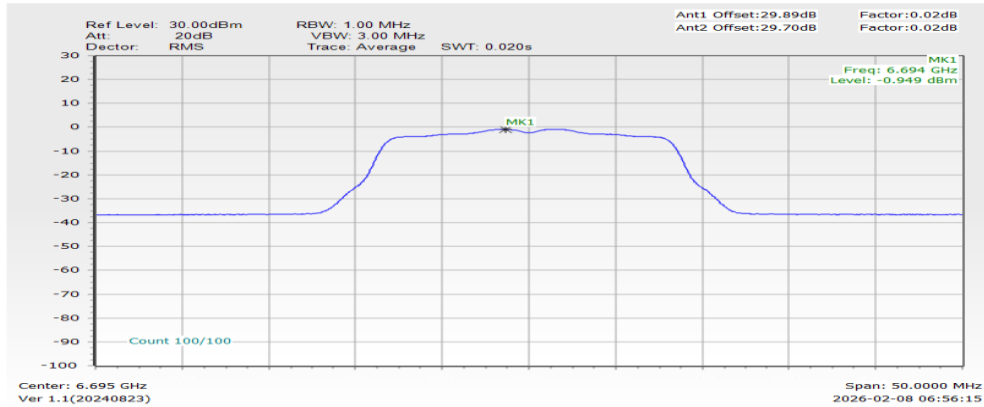


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

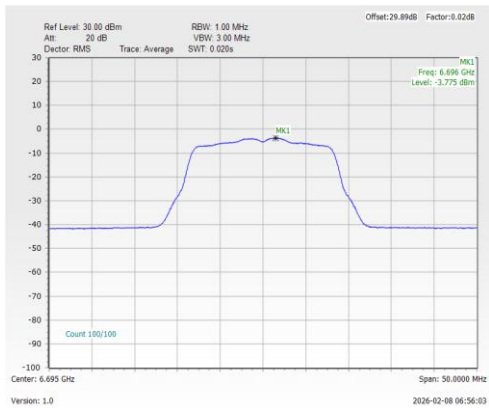


Power Density Plot Trace 2 (Ant 3)

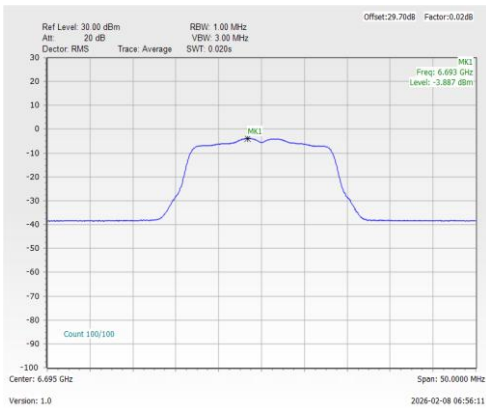



<802.11ax HE20>


Maximum Power Density Plot (dBm/MHz)

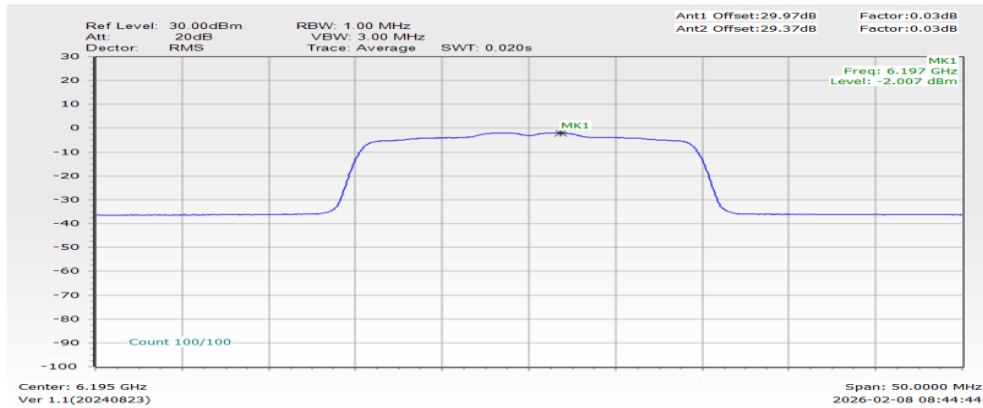


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

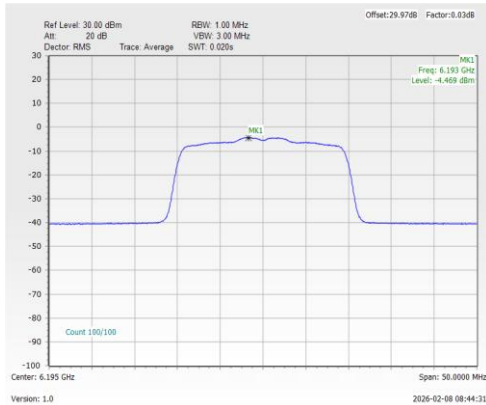


Power Density Plot Trace 2 (Ant 3)

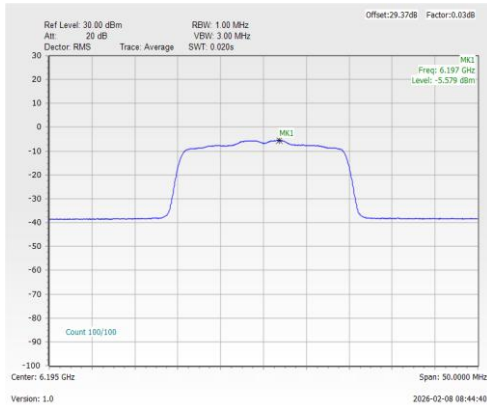



<802.11ax HE40>


Maximum Power Density Plot (dBm/MHz)

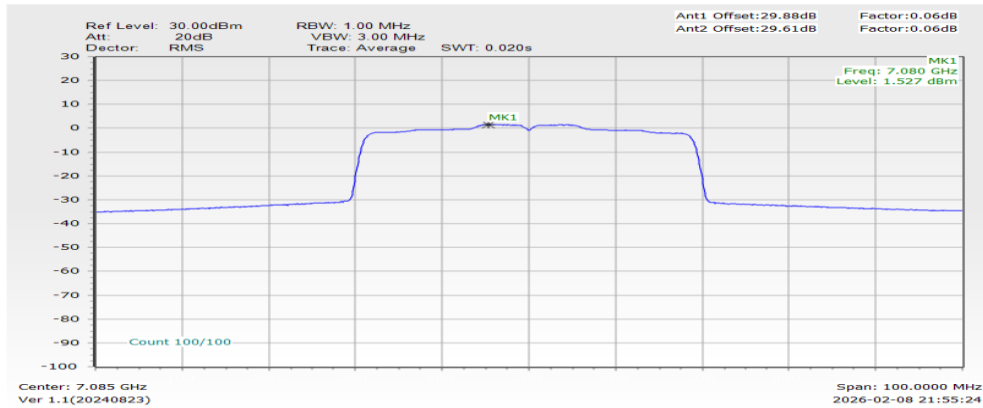


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

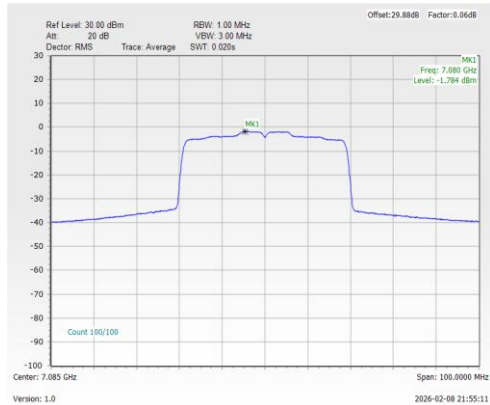


Power Density Plot Trace 2 (Ant 3)

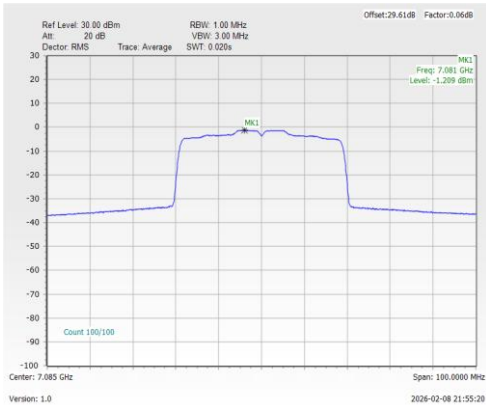



<802.11ax HE80>


Maximum Power Density Plot (dBm/MHz)

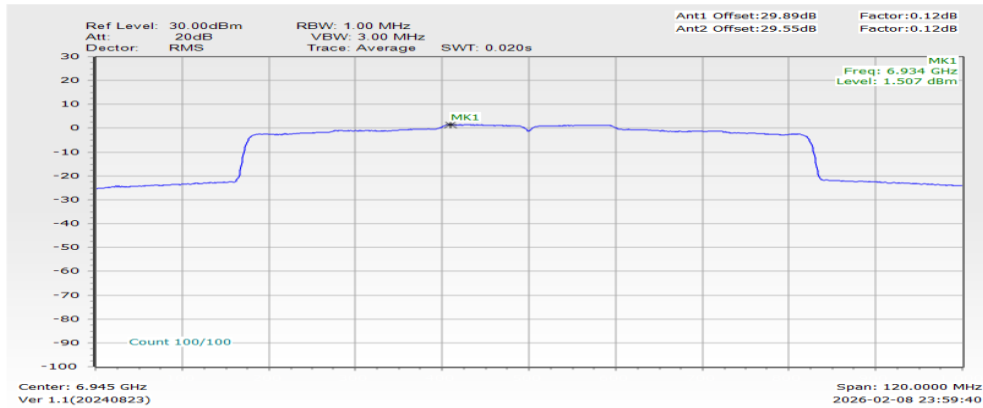

Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 4)

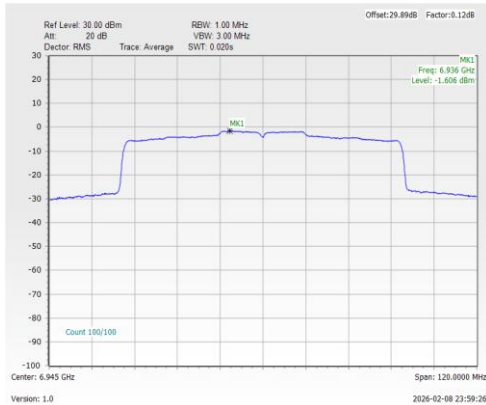

Power Density Plot Trace 2 (Ant 3)

