

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 30, 2023
Temperature / Humidity 27 deg. C / 44 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-40(OFDMA), 26-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5190	0	1.12	1.10	2.21	3.45	11.00	7.55		3.54	3.46	7.00	8.45	17.00	8.55	
	8	1.08	1.05	2.13	3.29	11.00	7.71		3.43	3.32	6.75	8.29	17.00	8.71	
	17	1.26	1.22	2.47	3.93	11.00	7.07		3.98	3.85	7.82	8.93	17.00	8.07	
5230	0	1.15	1.11	2.27	3.55	11.00	7.45		3.65	3.52	7.17	8.55	17.00	8.45	
	8	1.21	1.05	2.26	3.54	11.00	7.46		3.83	3.31	7.14	8.54	17.00	8.46	
	17	1.15	1.10	2.25	3.52	11.00	7.48		3.64	3.48	7.12	8.52	17.00	8.48	
5755	0	0.58	0.63	1.21	0.83	30.00	29.17		1.85	1.98	3.83	5.83	36.00	30.17	
	8	0.55	0.60	1.15	0.60	30.00	29.40		1.74	1.89	3.63	5.60	36.00	30.40	
	17	0.56	0.62	1.18	0.74	30.00	29.26		1.78	1.97	3.75	5.74	36.00	30.26	
5795	0	0.75	0.74	1.49	1.74	30.00	28.26		2.38	2.34	4.73	6.74	36.00	29.26	
	8	0.73	0.66	1.39	1.43	30.00	28.57		2.30	2.10	4.40	6.43	36.00	29.57	
	17	0.65	0.56	1.21	0.84	30.00	29.16		2.06	1.78	3.84	5.84	36.00	30.16	

Tested Frequency [MHz]	RU Index		RBW Correction Factor [dB]	RF0						RF1					
				PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
				[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5190	0	-	0.00	-12.67	3.44	9.71	5.00	0.49	5.49	-12.99	3.41	9.98	5.00	0.40	5.40
	8	-	0.00	-12.80	3.44	9.71	5.00	0.35	5.35	-13.18	3.41	9.98	5.00	0.21	5.21
	17	-	0.00	-12.15	3.44	9.71	5.00	1.00	6.00	-12.54	3.41	9.98	5.00	0.85	5.85
5230	0	-	0.00	-12.55	3.45	9.72	5.00	0.62	5.62	-12.95	3.43	9.98	5.00	0.46	5.46
	8	-	0.00	-12.34	3.45	9.72	5.00	0.83	5.83	-13.21	3.43	9.98	5.00	0.20	5.20
	17	-	0.00	-12.56	3.45	9.72	5.00	0.61	5.61	-13.00	3.43	9.98	5.00	0.42	5.42
5755	0	-	6.99	-22.71	3.65	9.73	5.00	-2.34	2.67	-22.64	3.63	9.99	5.00	-2.03	2.97
	8	-	6.99	-22.96	3.65	9.73	5.00	-2.59	2.42	-22.85	3.63	9.99	5.00	-2.24	2.76
	17	-	6.99	-22.88	3.65	9.73	5.00	-2.51	2.50	-22.67	3.63	9.99	5.00	-2.06	2.95
5795	0	-	6.99	-21.62	3.67	9.73	5.00	-1.23	3.77	-21.93	3.65	9.99	5.00	-1.30	3.70
	8	-	6.99	-21.78	3.67	9.73	5.00	-1.39	3.61	-22.41	3.65	9.99	5.00	-1.78	3.22
	17	-	6.99	-22.25	3.67	9.73	5.00	-1.86	3.14	-23.13	3.65	9.99	5.00	-2.50	2.50

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 30, 2023
Temperature / Humidity 27 deg. C / 44 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-40(OFDMA), 52-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5190	37	0.66	0.69	1.35	1.29	11.00	9.71		2.09	2.17	4.26	6.29	17.00	10.71	
	40	0.63	0.65	1.28	1.08	11.00	9.92		2.01	2.05	4.06	6.08	17.00	10.92	
	44	0.72	0.65	1.37	1.36	11.00	9.64		2.28	2.04	4.32	6.36	17.00	10.64	
5230	37	0.72	0.66	1.38	1.40	11.00	9.60		2.28	2.08	4.36	6.40	17.00	10.60	
	40	0.70	0.67	1.37	1.37	11.00	9.63		2.23	2.11	4.34	6.37	17.00	10.63	
	44	0.74	0.64	1.38	1.39	11.00	9.61		2.32	2.03	4.36	6.39	17.00	10.61	
5755	37	0.36	0.37	0.72	-1.42	30.00	31.42		1.12	1.16	2.28	3.58	36.00	32.42	
	40	0.32	0.35	0.67	-1.74	30.00	31.74		1.00	1.12	2.12	3.26	36.00	32.74	
	44	0.33	0.36	0.69	-1.60	30.00	31.60		1.04	1.15	2.19	3.40	36.00	32.60	
5795	37	0.47	0.42	0.89	-0.52	30.00	30.52		1.49	1.32	2.81	4.48	36.00	31.52	
	40	0.42	0.38	0.80	-0.95	30.00	30.95		1.34	1.20	2.54	4.05	36.00	31.95	
	44	0.38	0.35	0.73	-1.37	30.00	31.37		1.20	1.11	2.31	3.63	36.00	32.37	

Tested Frequency [MHz]	RU Index	-	RBW Correction Factor [dB]	RF0						RF1					
				PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
				[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5190	37	-	0.00	-14.95	3.44	9.71	5.00	-1.80	3.20	-15.02	3.41	9.98	5.00	-1.63	3.37
	40	-	0.00	-15.13	3.44	9.71	5.00	-1.98	3.02	-15.27	3.41	9.98	5.00	-1.88	3.12
	44	-	0.00	-14.56	3.44	9.71	5.00	-1.41	3.59	-15.29	3.41	9.98	5.00	-1.90	3.10
5230	37	-	0.00	-14.59	3.45	9.72	5.00	-1.42	3.58	-15.23	3.43	9.98	5.00	-1.82	3.18
	40	-	0.00	-14.69	3.45	9.72	5.00	-1.52	3.48	-15.17	3.43	9.98	5.00	-1.76	3.24
	44	-	0.00	-14.51	3.45	9.72	5.00	-1.34	3.66	-15.33	3.43	9.98	5.00	-1.92	3.08
5755	37	-	6.99	-24.87	3.65	9.73	5.00	-4.50	0.50	-24.98	3.63	9.99	5.00	-4.37	0.63
	40	-	6.99	-25.36	3.65	9.73	5.00	-4.99	0.01	-25.14	3.63	9.99	5.00	-4.53	0.47
	44	-	6.99	-25.19	3.65	9.73	5.00	-4.82	0.18	-25.01	3.63	9.99	5.00	-4.40	0.60
5795	37	-	6.99	-23.67	3.67	9.73	5.00	-3.28	1.72	-24.42	3.65	9.99	5.00	-3.79	1.21
	40	-	6.99	-24.11	3.67	9.73	5.00	-3.72	1.28	-24.85	3.65	9.99	5.00	-4.22	0.78
	44	-	6.99	-24.58	3.67	9.73	5.00	-4.19	0.81	-25.20	3.65	9.99	5.00	-4.57	0.43

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 30, 2023
Temperature / Humidity 27 deg. C / 44 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-40(OFDMA), 106-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin		
		RF0	RF1	Sum				RF0	RF1	Sum					
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		
5190	53	0.35	0.35	0.70	-1.53	11.00	12.53	1.11	1.11	2.22	3.47	17.00	13.53		
	54	0.35	0.34	0.68	-1.66	11.00	12.66	1.10	1.06	2.16	3.34	17.00	13.66		
	56	0.38	0.34	0.72	-1.41	11.00	12.41	1.20	1.09	2.29	3.59	17.00	13.41		
5230	53	0.34	0.33	0.68	-1.71	11.00	12.71	1.08	1.06	2.14	3.29	17.00	13.71		
	54	0.35	0.32	0.68	-1.70	11.00	12.70	1.12	1.02	2.14	3.30	17.00	13.70		
	56	0.36	0.33	0.69	-1.60	11.00	12.60	1.14	1.05	2.19	3.40	17.00	13.60		
5755	53	0.16	0.18	0.35	-4.60	30.00	34.60	0.52	0.57	1.10	0.40	36.00	35.60		
	54	0.16	0.17	0.33	-4.76	30.00	34.76	0.51	0.54	1.06	0.24	36.00	35.76		
	56	0.17	0.18	0.35	-4.54	30.00	34.54	0.55	0.56	1.11	0.46	36.00	35.54		
5795	53	0.22	0.21	0.43	-3.67	30.00	33.67	0.70	0.66	1.36	1.33	36.00	34.67		
	54	0.21	0.19	0.40	-3.95	30.00	33.95	0.66	0.62	1.27	1.05	36.00	34.95		
	56	0.18	0.17	0.35	-4.52	30.00	34.52	0.57	0.54	1.12	0.48	36.00	35.52		

Tested Frequency [MHz]	RU Index		RBW Correction Factor [dB]	RF0						RF1					
				PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
				[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5190	53	-	0.00	-17.68	3.44	9.71	5.00	-4.53	0.47	-17.94	3.41	9.98	5.00	-4.55	0.45
	54	-	0.00	-17.75	3.44	9.71	5.00	-4.60	0.40	-18.13	3.41	9.98	5.00	-4.74	0.26
	56	-	0.00	-17.36	3.44	9.71	5.00	-4.21	0.79	-18.02	3.41	9.98	5.00	-4.63	0.37
5230	53	-	0.00	-17.85	3.45	9.72	5.00	-4.68	0.32	-18.16	3.43	9.98	5.00	-4.75	0.25
	54	-	0.00	-17.67	3.45	9.72	5.00	-4.50	0.50	-18.34	3.43	9.98	5.00	-4.93	0.07
	56	-	0.00	-17.59	3.45	9.72	5.00	-4.42	0.58	-18.21	3.43	9.98	5.00	-4.80	0.20
5755	53	-	6.99	-28.20	3.65	9.73	5.00	-7.83	-2.83	-28.02	3.63	9.99	5.00	-7.41	-2.41
	54	-	6.99	-28.27	3.65	9.73	5.00	-7.90	-2.90	-28.26	3.63	9.99	5.00	-7.65	-2.65
	56	-	6.99	-27.98	3.65	9.73	5.00	-7.61	-2.61	-28.10	3.63	9.99	5.00	-7.49	-2.49
5795	53	-	6.99	-26.93	3.67	9.73	5.00	-6.54	-1.54	-27.45	3.65	9.99	5.00	-6.82	-1.82
	54	-	6.99	-27.21	3.67	9.73	5.00	-6.82	-1.82	-27.74	3.65	9.99	5.00	-7.11	-2.11
	56	-	6.99	-27.80	3.67	9.73	5.00	-7.41	-2.41	-28.29	3.65	9.99	5.00	-7.66	-2.66

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-40(OFDMA), 242-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)						PSD (e.i.r.p.)					
		Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
		RF0	RF1	Sum				RF0	RF1	Sum			
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]
5190	61	0.14	0.15	0.29	-5.40	11.00	16.40	0.44	0.47	0.91	-0.40	17.00	17.40
	62	0.16	0.15	0.31	-5.04	11.00	16.04	0.50	0.49	0.99	-0.04	17.00	17.04
5230	61	0.16	0.15	0.31	-5.04	11.00	16.04	0.51	0.48	0.99	-0.04	17.00	17.04
	62	0.16	0.15	0.31	-5.07	11.00	16.07	0.51	0.47	0.98	-0.07	17.00	17.07
5755	61	0.07	0.08	0.15	-8.28	30.00	38.28	0.22	0.25	0.47	-3.28	36.00	39.28
	62	0.07	0.08	0.15	-8.28	30.00	38.28	0.22	0.25	0.47	-3.28	36.00	39.28
5795	61	0.09	0.09	0.18	-7.46	30.00	37.46	0.29	0.27	0.57	-2.46	36.00	38.46
	62	0.09	0.08	0.17	-7.70	30.00	37.70	0.28	0.25	0.54	-2.70	36.00	38.70

Tested Frequency [MHz]	RU Index	-	RBW Correction Factor [dB]	RF0				RF1				PSD Result			
				PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain
				[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dB]	[dB]	[dBi]
5190	61	-	0.00	-21.73	3.44	9.71	5.00	-8.58	-3.58	-21.63	3.41	9.98	5.00	-8.24	-3.24
	62	-	0.00	-21.14	3.44	9.71	5.00	-7.99	-2.99	-21.51	3.41	9.98	5.00	-8.12	-3.12
5230	61	-	0.00	-21.06	3.45	9.72	5.00	-7.89	-2.89	-21.64	3.43	9.98	5.00	-8.23	-3.23
	62	-	0.00	-21.09	3.45	9.72	5.00	-7.92	-2.92	-21.66	3.43	9.98	5.00	-8.25	-3.25
5755	61	-	6.99	-32.01	3.65	9.73	5.00	-11.64	-6.64	-31.58	3.63	9.99	5.00	-10.97	-5.97
	62	-	6.99	-31.95	3.65	9.73	5.00	-11.58	-6.58	-31.62	3.63	9.99	5.00	-11.01	-6.01
5795	61	-	6.99	-30.71	3.67	9.73	5.00	-10.32	-5.32	-31.24	3.65	9.99	5.00	-10.61	-5.61
	62	-	6.99	-30.85	3.67	9.73	5.00	-10.46	-5.46	-31.61	3.65	9.99	5.00	-10.98	-5.98

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-40(OFDMA), 484-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5190	65	0.08	0.08	0.16	-7.90	11.00	18.90		0.26	0.25	0.51	-2.90	17.00	19.90	
5230	65	0.08	0.08	0.16	-7.83	11.00	18.83		0.27	0.25	0.52	-2.83	17.00	19.83	
5755	65	0.04	0.04	0.08	-11.12	30.00	41.12		0.12	0.13	0.24	-6.12	36.00	42.12	
5795	65	0.05	0.04	0.09	-10.37	30.00	40.37		0.15	0.14	0.29	-5.37	36.00	41.37	

				RF0						RF1					
Tested Frequency	RU Index	-	RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result		PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result	
[MHz]			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5190	65	-	0.00	-23.94	3.44	9.71	5.00	-10.79	-5.79	-24.42	3.41	9.98	5.00	-11.03	-6.03
5230	65	-	0.00	-23.90	3.45	9.72	5.00	-10.73	-5.73	-24.36	3.43	9.98	5.00	-10.95	-5.95
5755	65	-	6.99	-34.70	3.65	9.73	5.00	-14.33	-9.33	-34.55	3.63	9.99	5.00	-13.94	-8.94
5795	65	-	6.99	-33.64	3.67	9.73	5.00	-13.25	-8.25	-34.14	3.65	9.99	5.00	-13.51	-8.51

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log (\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 30, 2023
Temperature / Humidity 27 deg. C / 44 % RH
Engineer Shiro Kobayashi
Mode Tx 11ac-80

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
	RF0	RF1	Sum				RF0	RF1	Sum			
[mW/MHz]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]
5210	0.03	0.04	0.07	-11.56	11.00	22.56	0.11	0.11	0.22	-6.56	17.00	23.56
5775	0.03	0.03	0.05	-12.67	30.00	42.67	0.09	0.08	0.17	-7.67	36.00	43.67

Tested Frequency [MHz]		RBW Correction Factor [dB]	RF0					RF1					PSD Result	
			PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
			[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5210	-	0.00	-27.79	3.44	9.72	5.00	-14.63	-9.63	-27.92	3.42	9.98	5.00	-14.52	-9.52
5775	-	6.99	-35.85	3.66	9.73	5.00	-15.47	-10.47	-36.52	3.64	9.99	5.00	-15.90	-10.90

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log (\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 30, 2023
Temperature / Humidity 27 deg. C / 44 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDM)

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
	RF0	RF1	Sum				RF0	RF1	Sum			
[mW/MHz]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]
5210	0.04	0.03	0.07	-11.51	11.00	22.51	0.11	0.11	0.22	-6.51	17.00	23.51
5775	0.02	0.02	0.04	-14.23	30.00	44.23	0.06	0.06	0.12	-9.23	36.00	45.23

Tested Frequency [MHz]		RBW Correction Factor [dB]	RF0					RF1						
			PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
			[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5210	-	0.00	-27.59	3.44	9.72	5.00	-14.43	-9.43	-28.02	3.42	9.98	5.00	-14.62	-9.62
5775	-	6.99	-37.31	3.66	9.73	5.00	-16.93	-11.93	-38.19	3.64	9.99	5.00	-17.57	-12.57

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log (\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 26-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5210	0	1.07	1.14	2.21	3.45	11.00	7.55		3.40	3.60	7.00	8.45	17.00	8.55	
	18	0.94	0.86	1.80	2.55	11.00	8.45		2.98	2.71	5.69	7.55	17.00	9.45	
	36	1.20	1.11	2.31	3.64	11.00	7.36		3.79	3.52	7.31	8.64	17.00	8.36	
5775	0	0.71	0.62	1.33	1.25	30.00	28.75		2.25	1.97	4.22	6.25	36.00	29.75	
	18	0.72	0.62	1.34	1.26	30.00	28.74		2.28	1.95	4.23	6.26	36.00	29.74	
	36	0.65	0.54	1.18	0.73	30.00	29.27		2.04	1.70	3.74	5.73	36.00	30.27	

Tested Frequency [MHz]	RU Index	-	RF0							RF1						
			RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	
			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	
5210	0	-	0.00	-12.85	3.44	9.72	5.00	0.31	5.31	-12.83	3.42	9.98	5.00	0.57	5.57	
	18	-	0.00	-13.42	3.44	9.72	5.00	-0.26	4.74	-14.07	3.42	9.98	5.00	-0.67	4.33	
	36	-	0.00	-12.37	3.44	9.72	5.00	0.79	5.79	-12.93	3.42	9.98	5.00	0.47	5.47	
5775	0	-	6.99	-21.87	3.66	9.73	5.00	-1.49	3.51	-22.67	3.64	9.99	5.00	-2.05	2.95	
	18	-	6.99	-21.81	3.66	9.73	5.00	-1.43	3.57	-22.72	3.64	9.99	5.00	-2.10	2.90	
	36	-	6.99	-22.28	3.66	9.73	5.00	-1.90	3.10	-23.31	3.64	9.99	5.00	-2.69	2.31	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 52-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5210	37	0.62	0.64	1.26	1.01	11.00	9.99		1.97	2.02	3.99	6.01	17.00	10.99	
	44	0.68	0.60	1.28	1.08	11.00	9.92		2.16	1.90	4.06	6.08	17.00	10.92	
	52	0.68	0.64	1.32	1.20	11.00	9.80		2.14	2.02	4.16	6.20	17.00	10.80	
5775	37	0.39	0.34	0.73	-1.38	30.00	31.38		1.23	1.07	2.30	3.62	36.00	32.38	
	44	0.43	0.37	0.80	-0.96	30.00	30.96		1.37	1.17	2.54	4.04	36.00	31.96	
	52	0.37	0.31	0.67	-1.73	30.00	31.73		1.16	0.97	2.12	3.27	36.00	32.73	

Tested Frequency [MHz]	RU Index	-	RF0							RF1						
			RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	
			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	
5210	37	-	0.00	-15.23	3.44	9.72	5.00	-2.07	2.94	-15.34	3.42	9.98	5.00	-1.94	3.06	
	44	-	0.00	-14.83	3.44	9.72	5.00	-1.67	3.34	-15.61	3.42	9.98	5.00	-2.21	2.79	
	52	-	0.00	-14.86	3.44	9.72	5.00	-1.70	3.31	-15.34	3.42	9.98	5.00	-1.94	3.06	
5775	37	-	6.99	-24.48	3.66	9.73	5.00	-4.10	0.90	-25.31	3.64	9.99	5.00	-4.69	0.31	
	44	-	6.99	-24.03	3.66	9.73	5.00	-3.65	1.35	-24.94	3.64	9.99	5.00	-4.32	0.69	
	52	-	6.99	-24.75	3.66	9.73	5.00	-4.37	0.63	-25.77	3.64	9.99	5.00	-5.15	-0.15	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log (\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 106-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5210	53	0.30	0.30	0.60	-2.22	11.00	13.22		0.94	0.95	1.90	2.78	17.00	14.22	
	56	0.31	0.29	0.61	-2.16	11.00	13.16		0.99	0.93	1.92	2.84	17.00	14.16	
	60	0.32	0.31	0.63	-1.98	11.00	12.98		1.02	0.98	2.00	3.02	17.00	13.98	
5775	53	0.18	0.16	0.34	-4.72	30.00	34.72		0.57	0.50	1.07	0.28	36.00	35.72	
	56	0.19	0.17	0.35	-4.51	30.00	34.51		0.59	0.53	1.12	0.49	36.00	35.51	
	60	0.17	0.15	0.32	-4.98	30.00	34.98		0.53	0.47	1.00	0.02	36.00	35.98	

Tested Frequency [MHz]	RU Index	-	RF0							RF1						
			RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	
			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	
5210	53	-	0.00	-18.42	3.44	9.72	5.00	-5.26	-0.26	-18.60	3.42	9.98	5.00	-5.20	-0.20	
	56	-	0.00	-18.20	3.44	9.72	5.00	-5.04	-0.04	-18.70	3.42	9.98	5.00	-5.30	-0.30	
	60	-	0.00	-18.06	3.44	9.72	5.00	-4.90	0.10	-18.49	3.42	9.98	5.00	-5.09	-0.09	
5775	53	-	6.99	-27.84	3.66	9.73	5.00	-7.46	-2.46	-28.65	3.64	9.99	5.00	-8.03	-3.03	
	56	-	6.99	-27.70	3.66	9.73	5.00	-7.32	-2.32	-28.34	3.64	9.99	5.00	-7.72	-2.72	
	60	-	6.99	-28.14	3.66	9.73	5.00	-7.76	-2.76	-28.87	3.64	9.99	5.00	-8.25	-3.25	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 242-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5210	61	0.13	0.14	0.27	-5.64	11.00	16.64		0.43	0.44	0.86	-0.64	17.00	17.64	
	62	0.14	0.13	0.27	-5.68	11.00	16.68		0.43	0.43	0.86	-0.68	17.00	17.68	
	64	0.15	0.14	0.29	-5.33	11.00	16.33		0.48	0.44	0.93	-0.33	17.00	17.33	
5775	61	0.09	0.07	0.16	-8.04	30.00	38.04		0.27	0.23	0.50	-3.04	36.00	39.04	
	62	0.09	0.07	0.16	-7.87	30.00	37.87		0.29	0.23	0.52	-2.87	36.00	38.87	
	64	0.08	0.07	0.15	-8.22	30.00	38.22		0.25	0.23	0.48	-3.22	36.00	39.22	

Tested Frequency [MHz]	RU Index	-	RF0							RF1						
			RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	
			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	
5210	61	-	0.00	-21.87	3.44	9.72	5.00	-8.71	-3.71	-22.00	3.42	9.98	5.00	-8.60	-3.60	
	62	-	0.00	-21.83	3.44	9.72	5.00	-8.67	-3.67	-22.11	3.42	9.98	5.00	-8.71	-3.71	
	64	-	0.00	-21.30	3.44	9.72	5.00	-8.14	-3.14	-21.95	3.42	9.98	5.00	-8.55	-3.55	
5775	61	-	6.99	-31.04	3.66	9.73	5.00	-10.66	-5.66	-32.09	3.64	9.99	5.00	-11.47	-6.47	
	62	-	6.99	-30.80	3.66	9.73	5.00	-10.42	-5.42	-32.01	3.64	9.99	5.00	-11.39	-6.39	
	64	-	6.99	-31.39	3.66	9.73	5.00	-11.01	-6.01	-32.09	3.64	9.99	5.00	-11.47	-6.47	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 484-tone RU

RF0 + RF1 Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	RU Index	PSD (Conducted)							PSD (e.i.r.p.)						
		Antenna			Result	Limit	Margin		Antenna			Result	Limit	Margin	
		RF0	RF1	Sum					RF0	RF1	Sum				
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5210	65	0.07	0.07	0.15	-8.38	11.00	19.38		0.23	0.23	0.46	-3.38	17.00	20.38	
	66	0.08	0.08	0.15	-8.13	11.00	19.13		0.25	0.24	0.49	-3.13	17.00	20.13	
5775	65	0.04	0.04	0.08	-10.86	30.00	40.86		0.14	0.12	0.26	-5.86	36.00	41.86	
	66	0.04	0.04	0.08	-11.04	30.00	41.04		0.13	0.12	0.25	-6.04	36.00	42.04	

Tested Frequency [MHz]	RU Index	-	RF0							RF1						
			RBW Correction Factor [dB]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]	
5210	65	-	0.00	-24.64	3.44	9.72	5.00	-11.48	-6.48	-24.70	3.42	9.98	5.00	-11.30	-6.30	
	66	-	0.00	-24.22	3.44	9.72	5.00	-11.06	-6.06	-24.63	3.42	9.98	5.00	-11.23	-6.23	
5775	65	-	6.99	-33.88	3.66	9.73	5.00	-13.50	-8.50	-34.90	3.64	9.99	5.00	-14.28	-9.28	
	66	-	6.99	-34.32	3.66	9.73	5.00	-13.94	-8.94	-34.78	3.64	9.99	5.00	-14.16	-9.16	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log (\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2023
Temperature / Humidity 25 deg. C / 42 % RH
Engineer Shiro Kobayashi
Mode Tx 11ax-80(OFDMA), 996-tone RU

RF0 + RF1		Applied limit: 15.407, mobile and portable client device											
Tested Frequency	RU Index	PSD (Conducted)						PSD (e.i.r.p.)					
		Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
[MHz]		RF0	RF1	Sum				RF0	RF1	Sum			
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]
5210	67	0.04	0.03	0.07	-11.56	11.00	22.56	0.12	0.10	0.22	-6.56	17.00	23.56
5775	67	0.02	0.02	0.04	-14.20	30.00	44.20	0.06	0.06	0.12	-9.20	36.00	45.20

RF0															
RF1															
Tested Frequency	RU Index	-	RBW Correction Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
[MHz]			[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5210	67	-	0.00	-27.43	3.44	9.72	5.00	-14.27	-9.27	-28.30	3.42	9.98	5.00	-14.90	-9.90
5775	67	-	6.99	-37.27	3.66	9.73	5.00	-16.89	-11.89	-38.18	3.64	9.99	5.00	-17.56	-12.56

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD (Conducted) Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + RBW Correction Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (U-NII-1 for FCC)


Maximum Power Spectral Density

11a, RF0

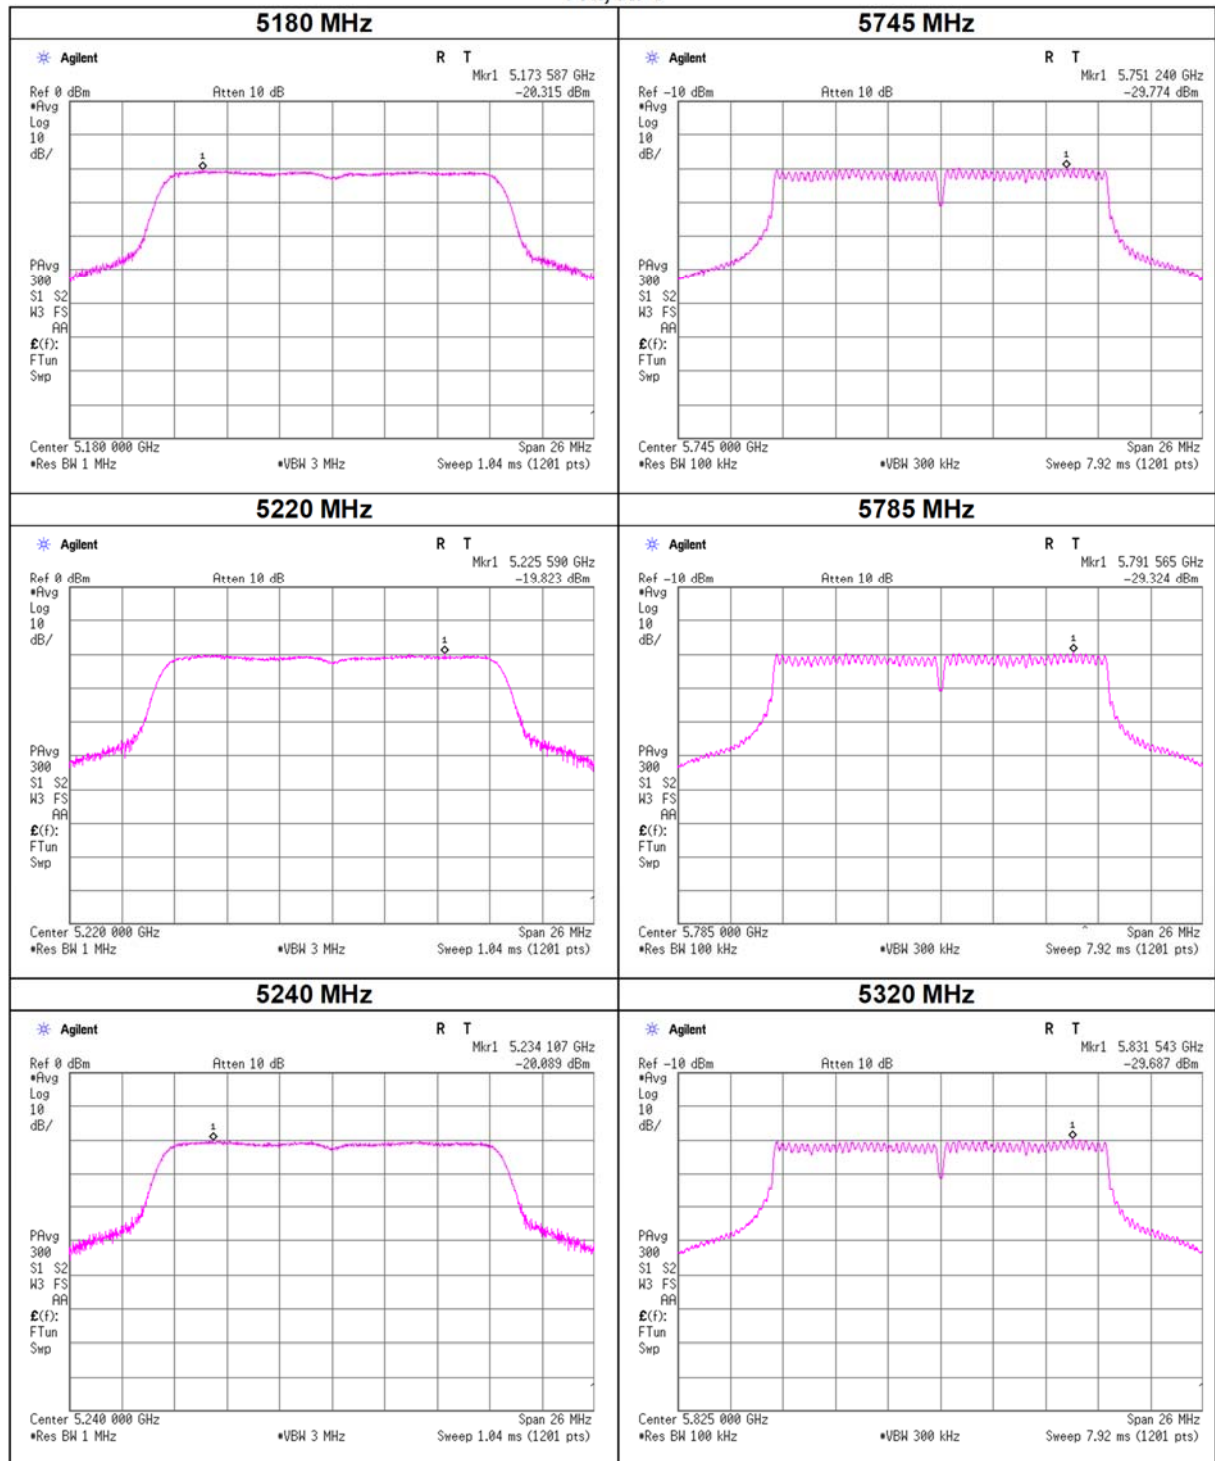


Maximum Power Spectral Density

11a, RF1

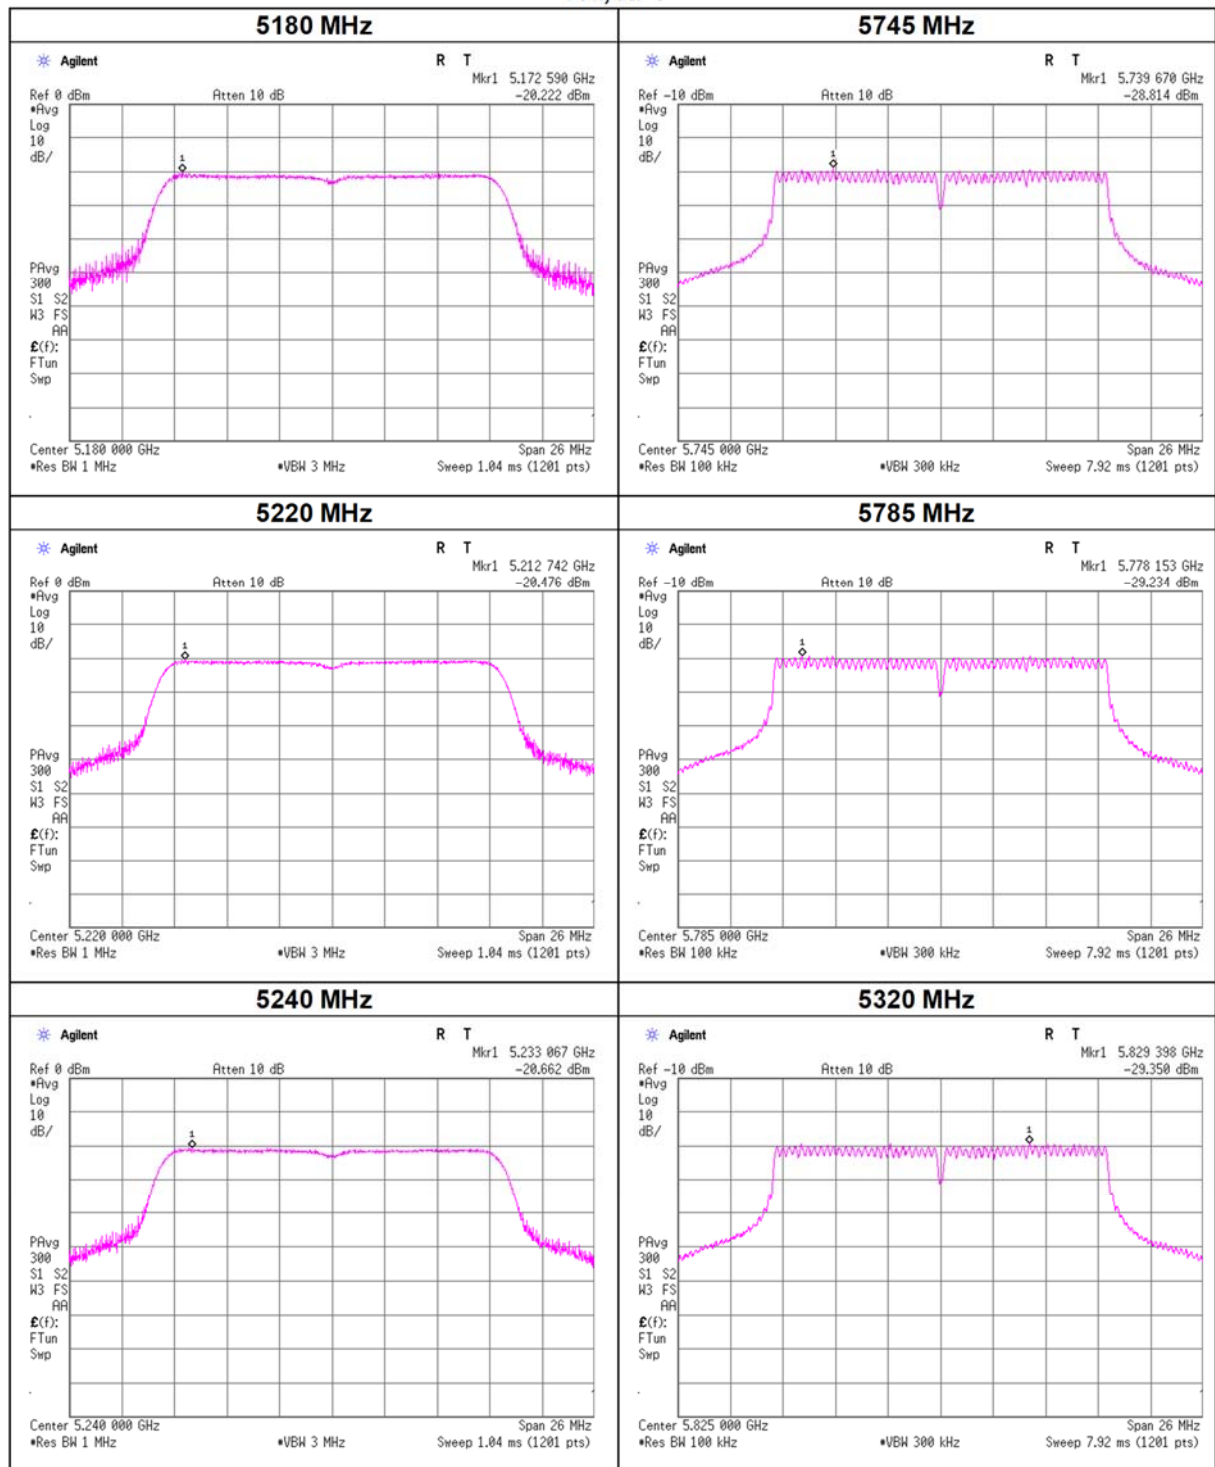


Maximum Power Spectral Density

11n-20, RF0

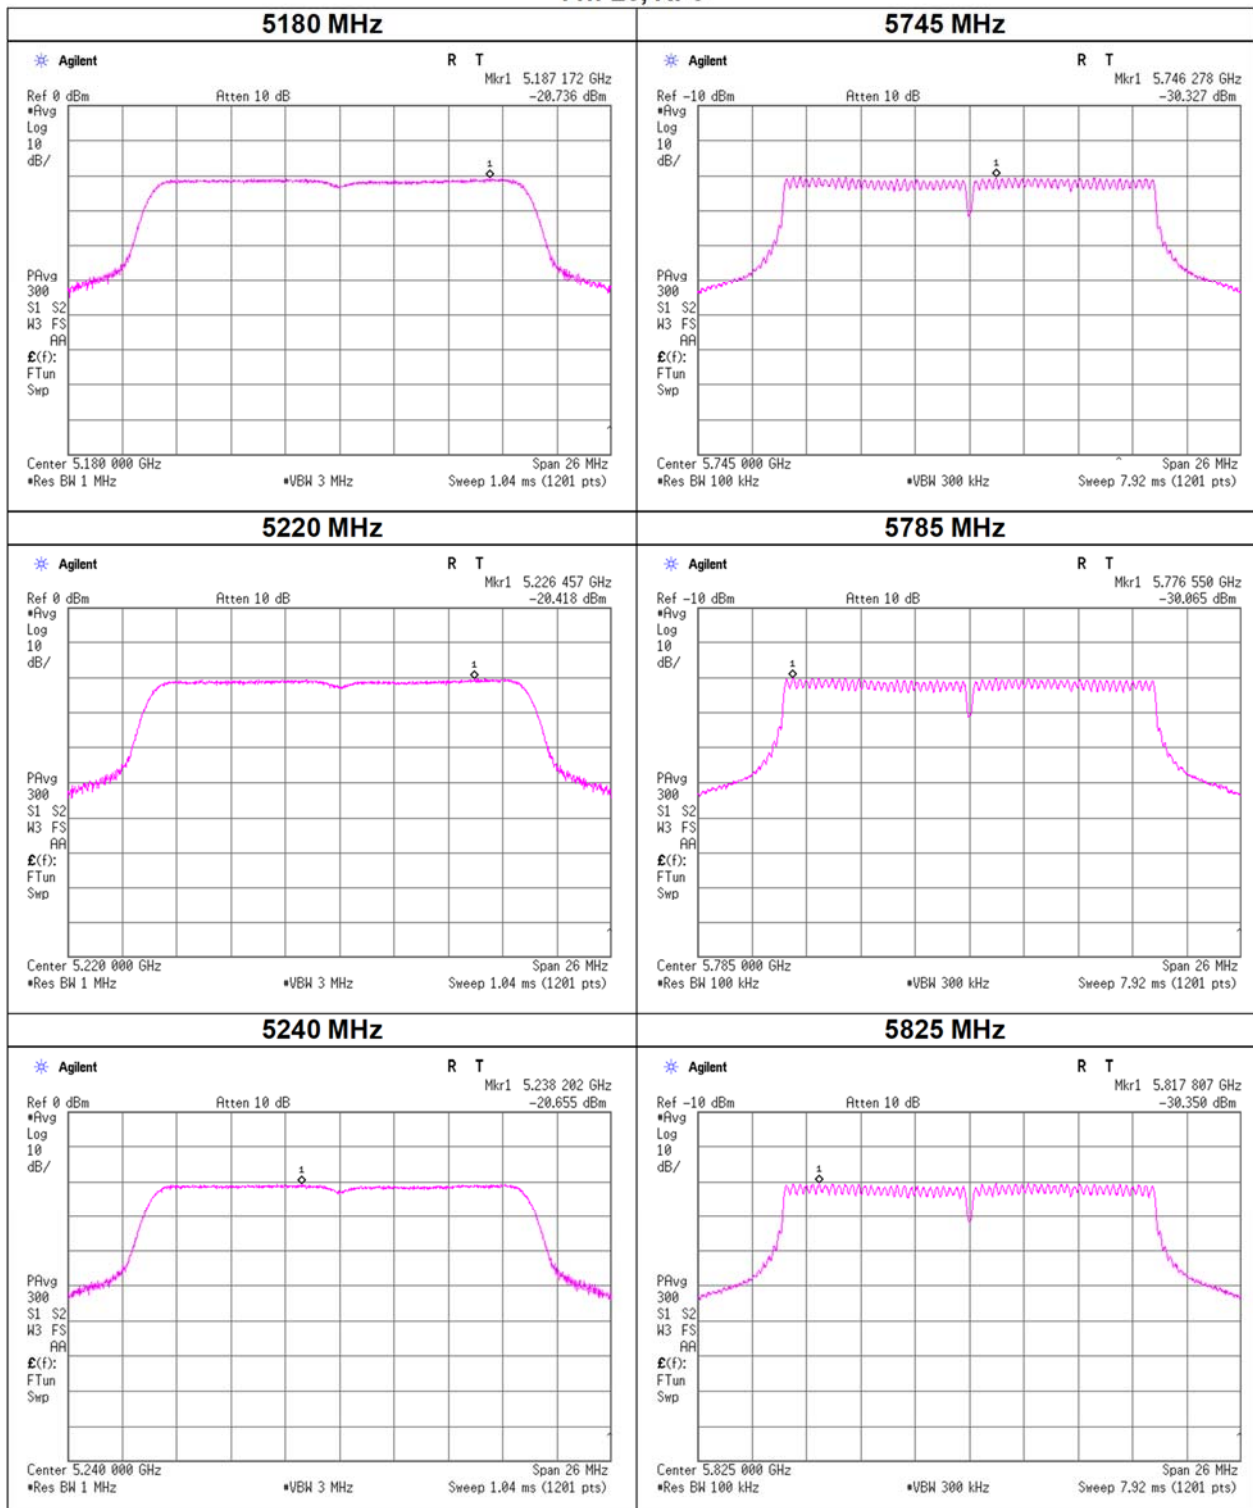


Maximum Power Spectral Density

11n-20, RF1

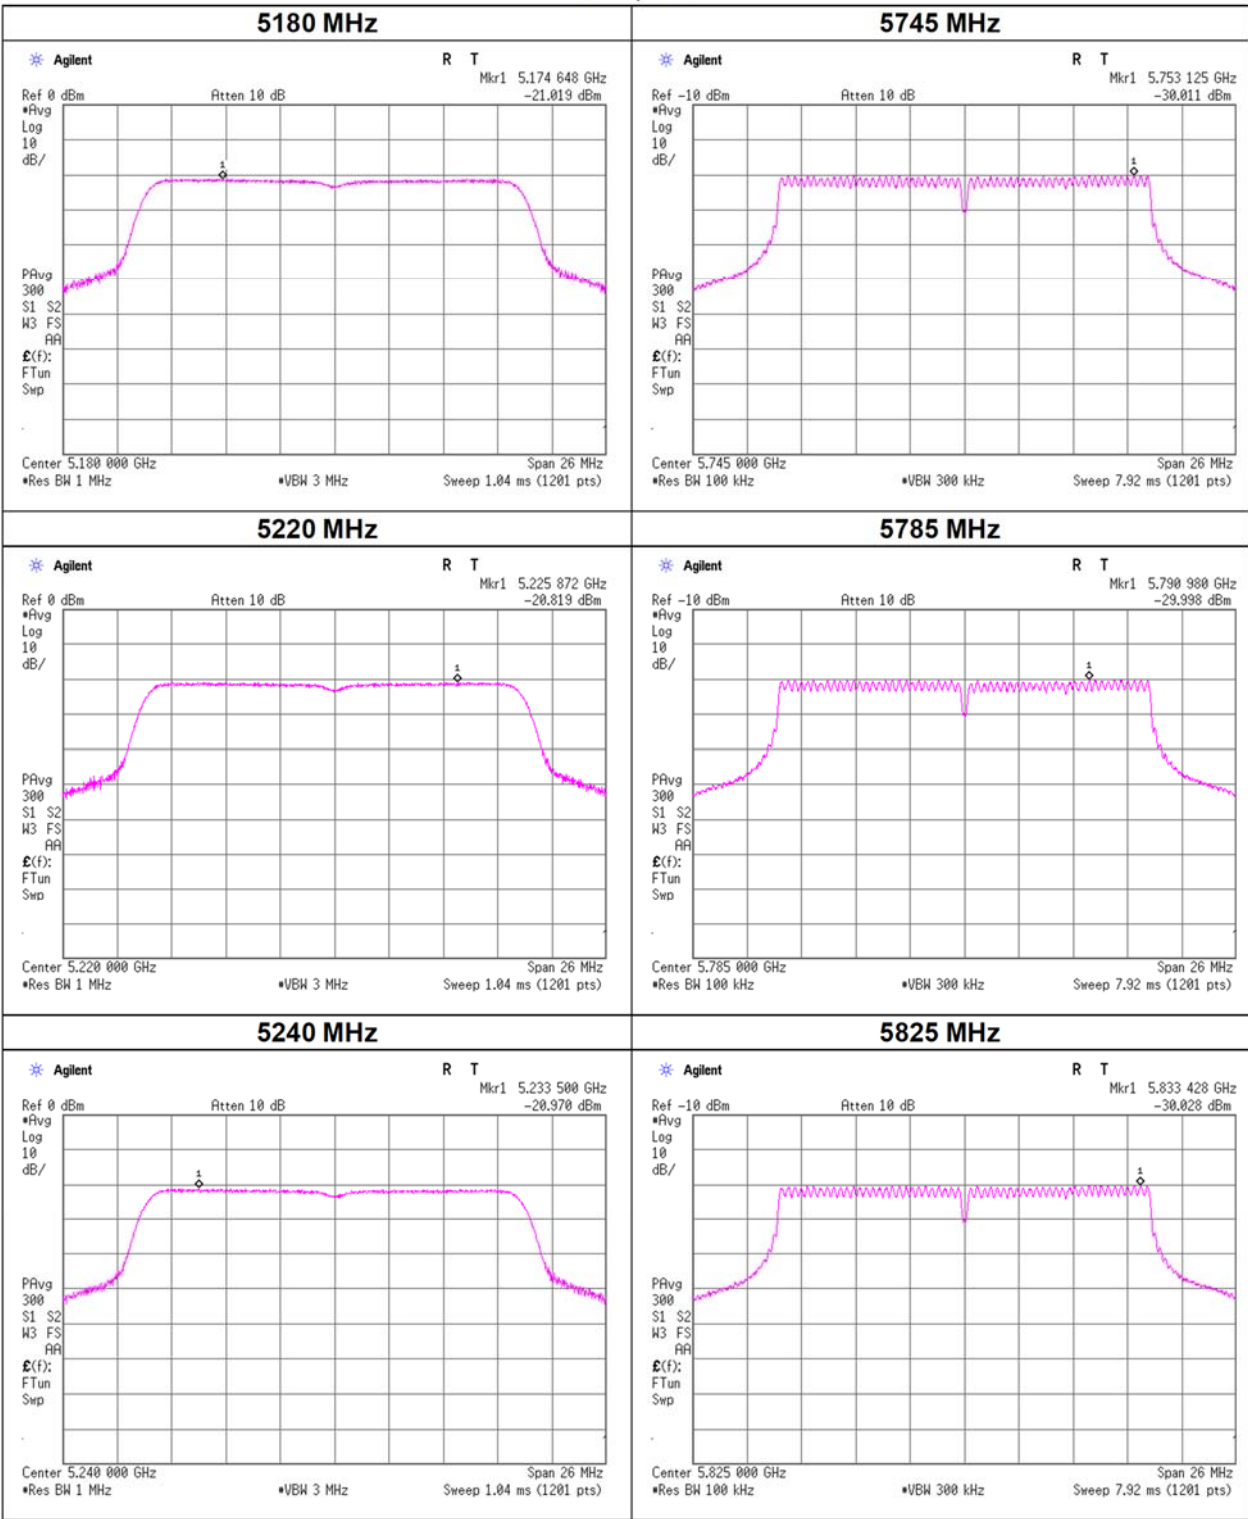


Maximum Power Spectral Density

11ac-20, RF0

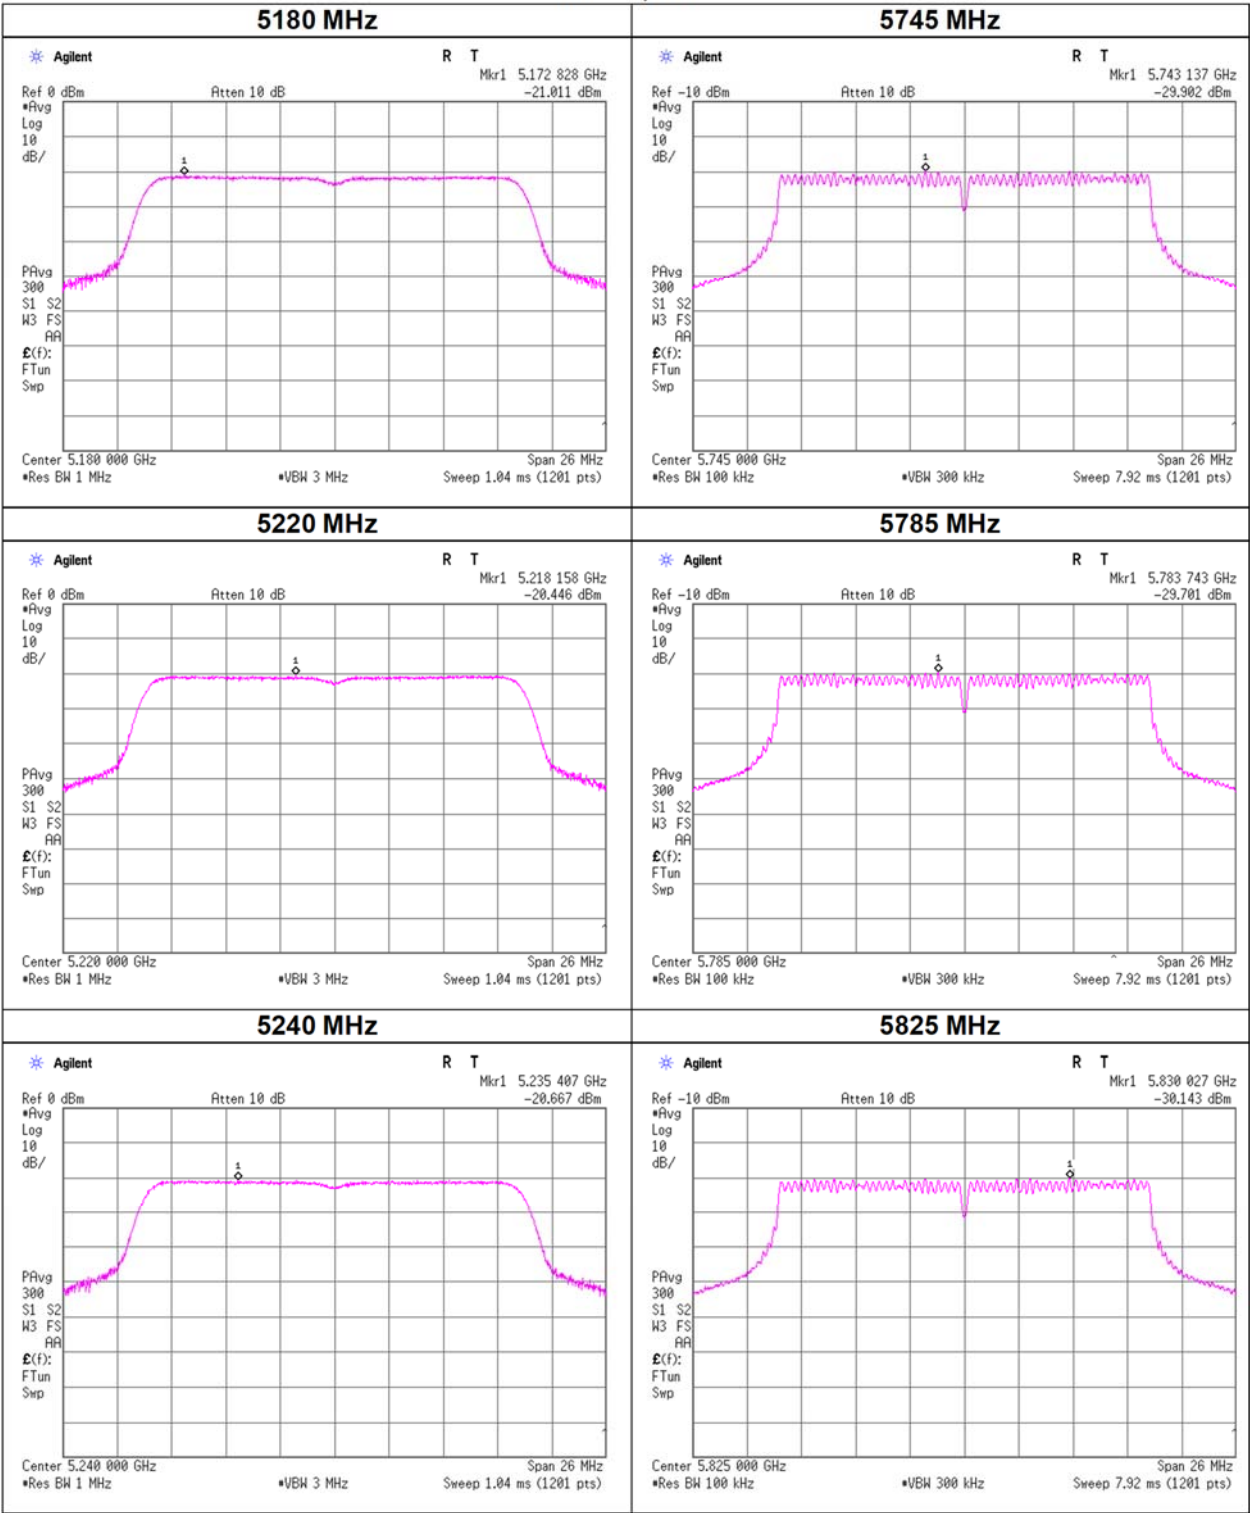


Maximum Power Spectral Density

11ac-20, RF1

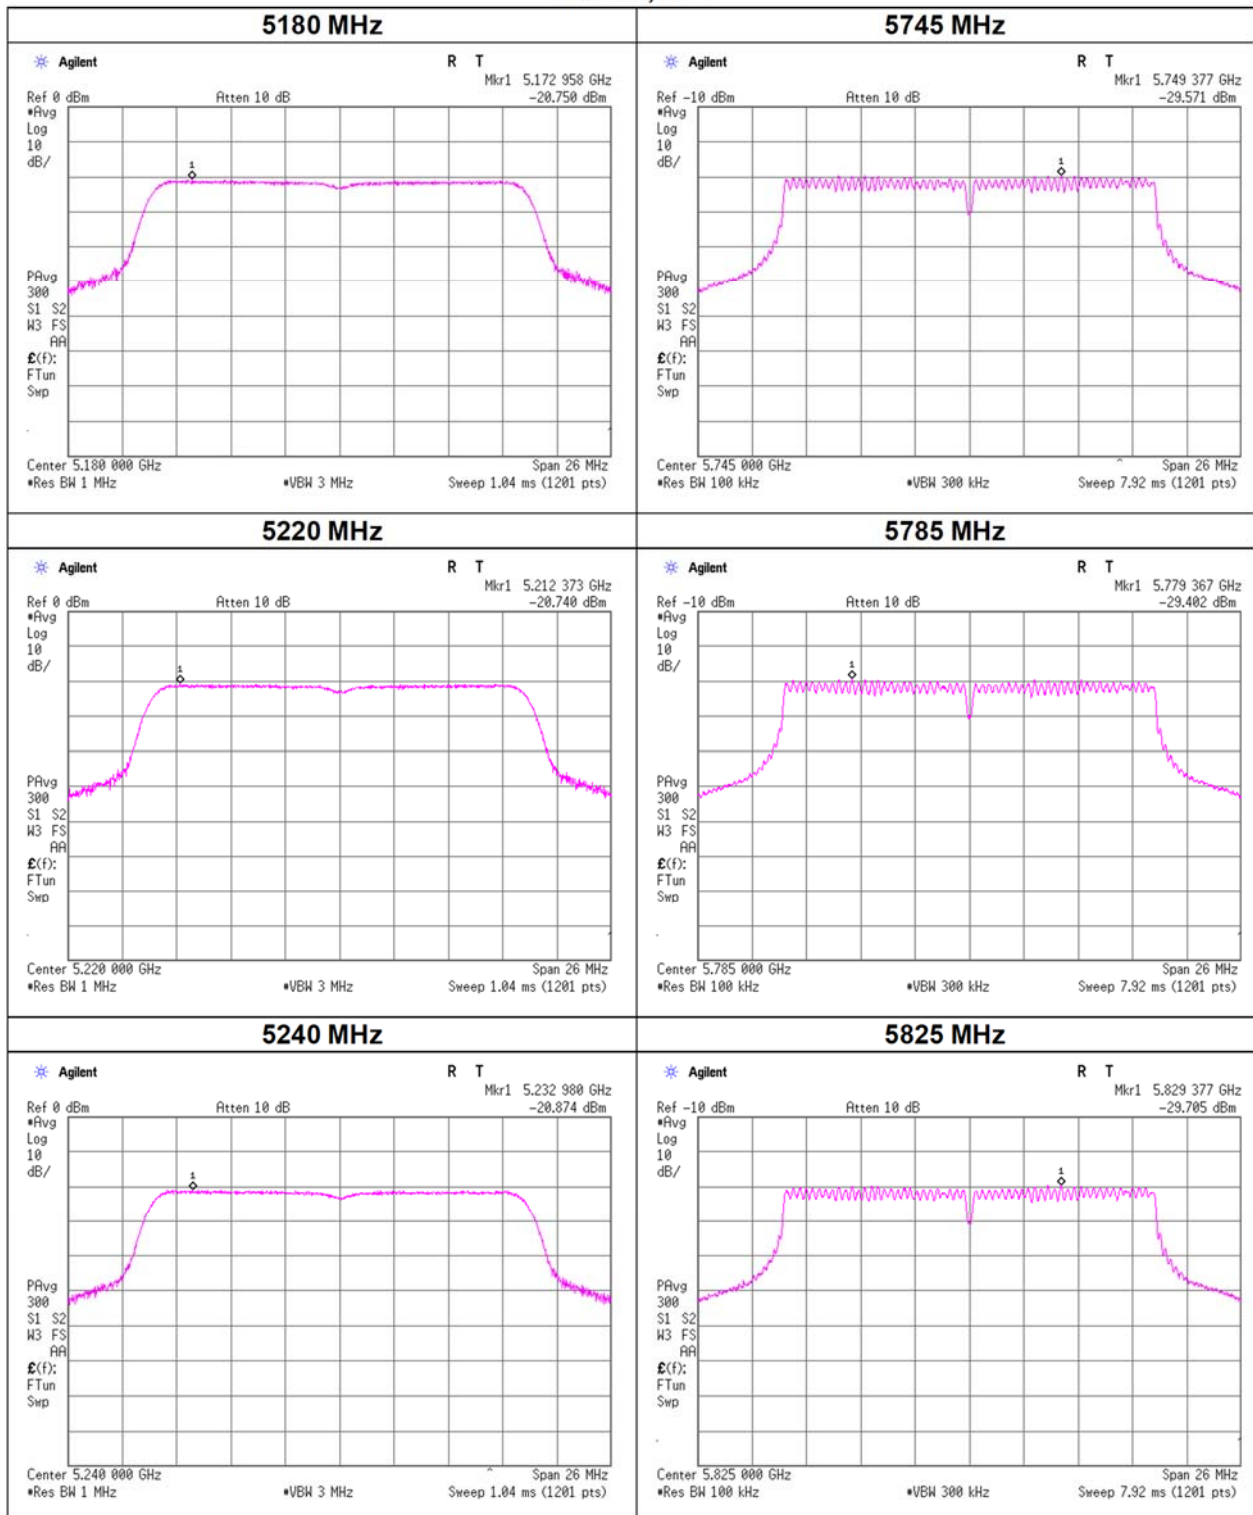


Maximum Power Spectral Density

11ax-20 (OFDM), RF0

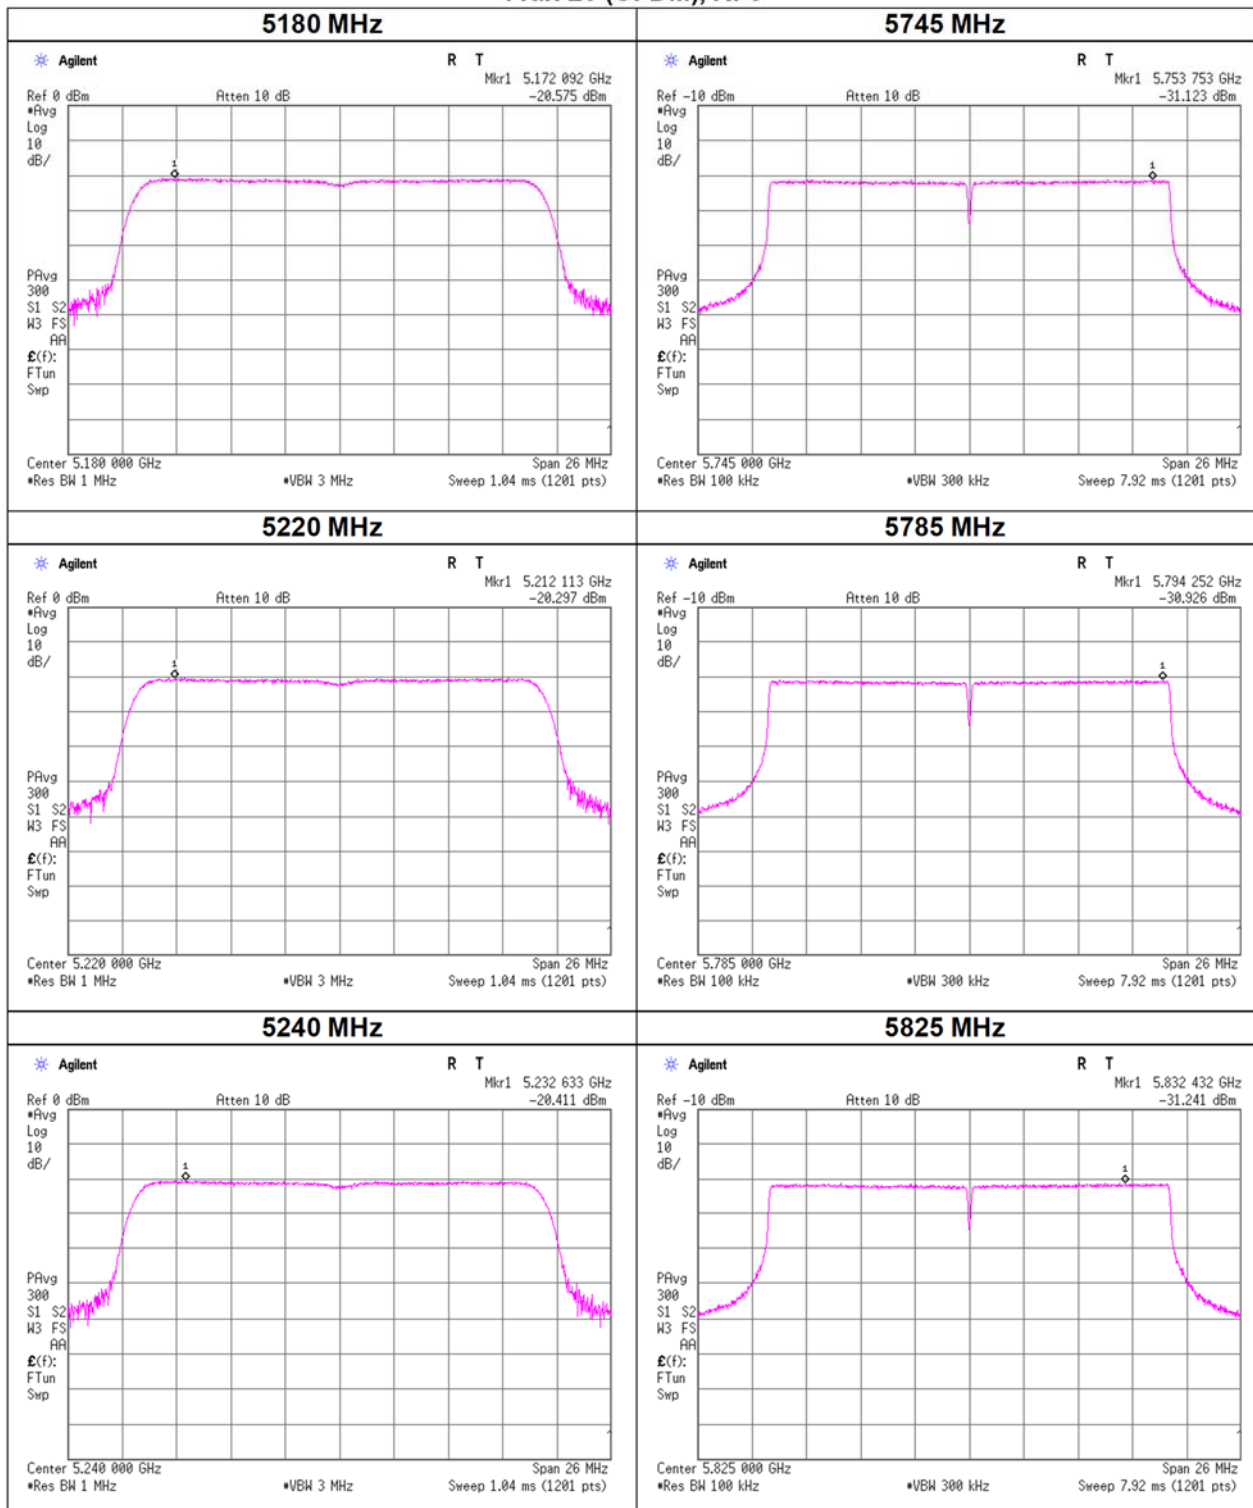


Maximum Power Spectral Density

11ax-20 (OFDM), RF1

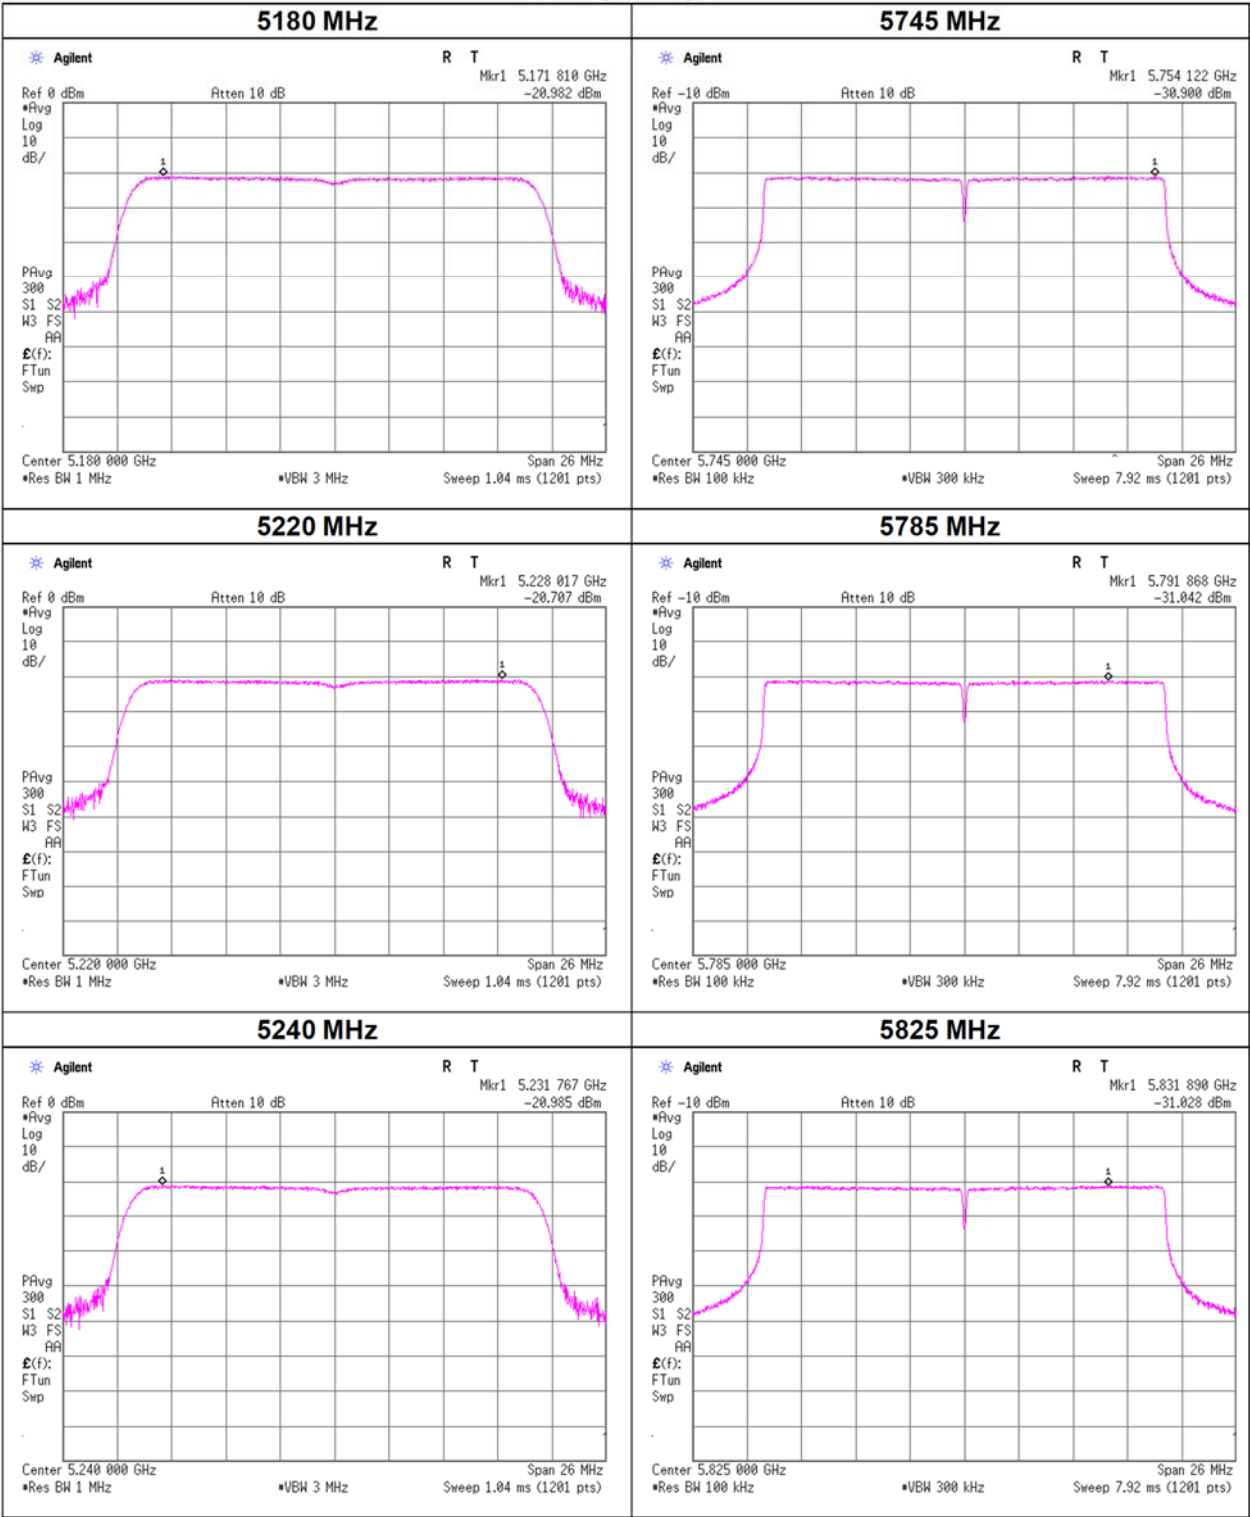


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF0

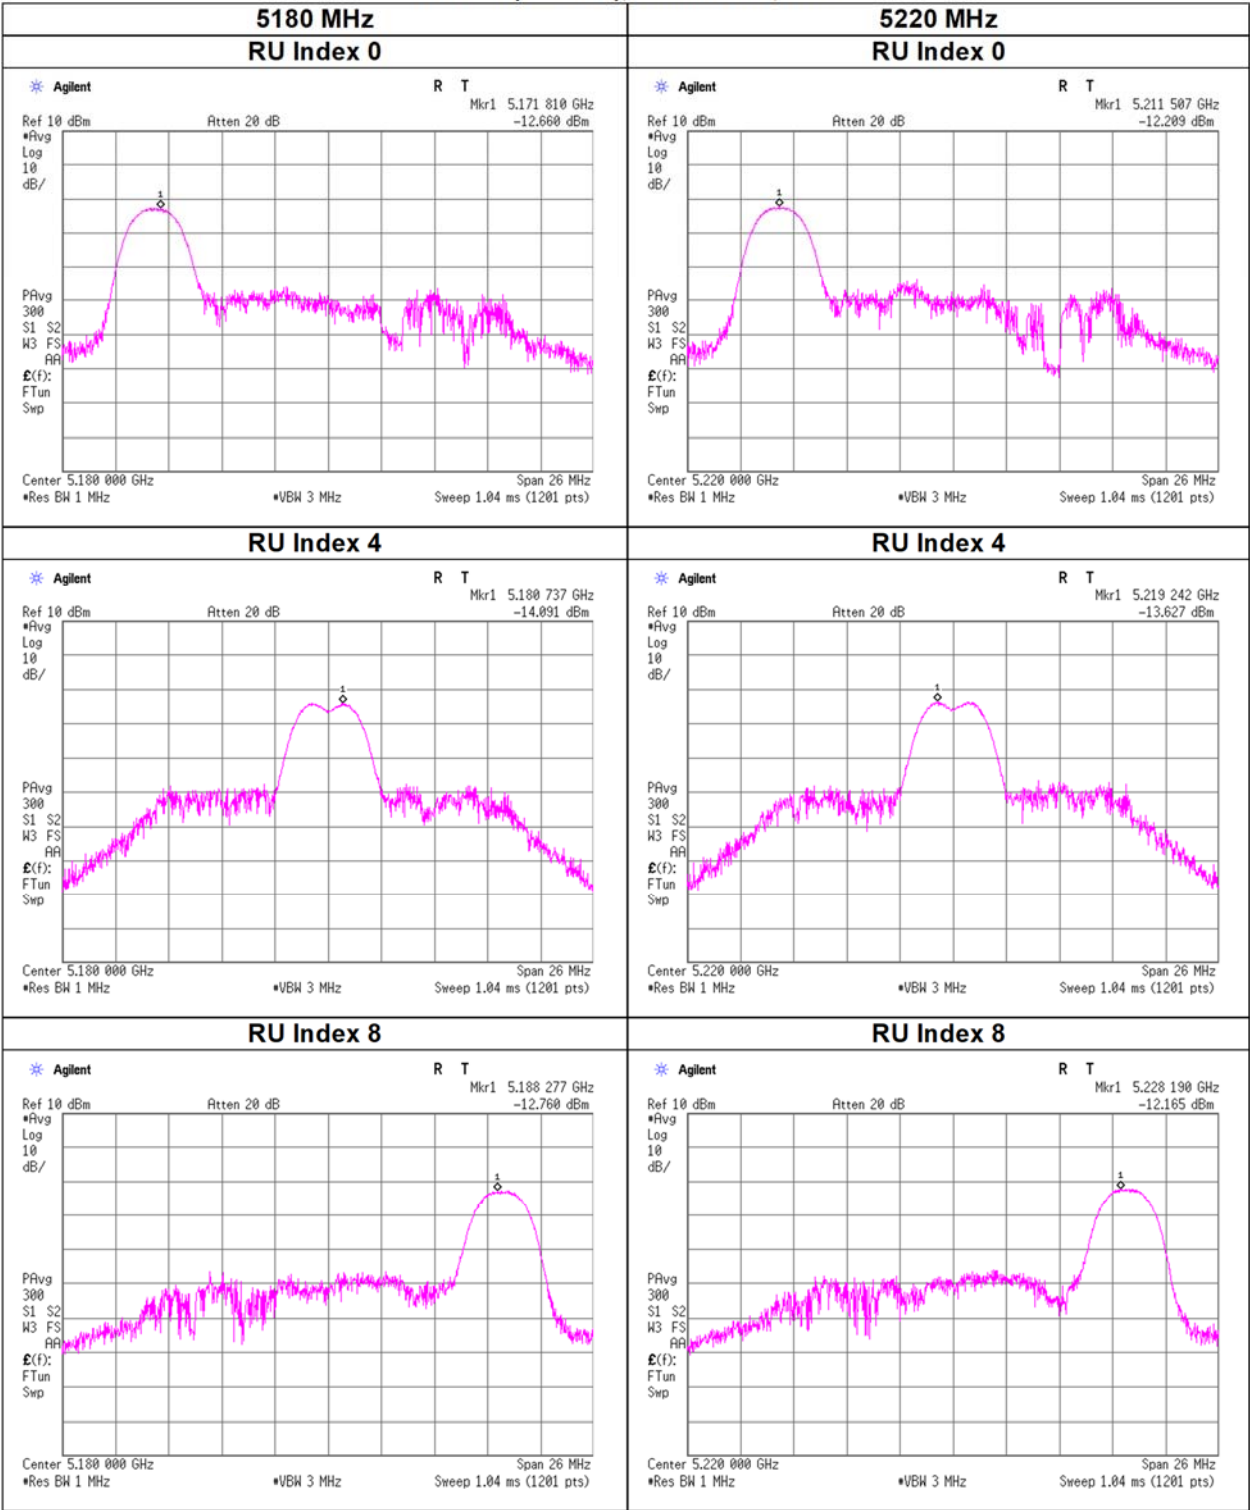


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF0

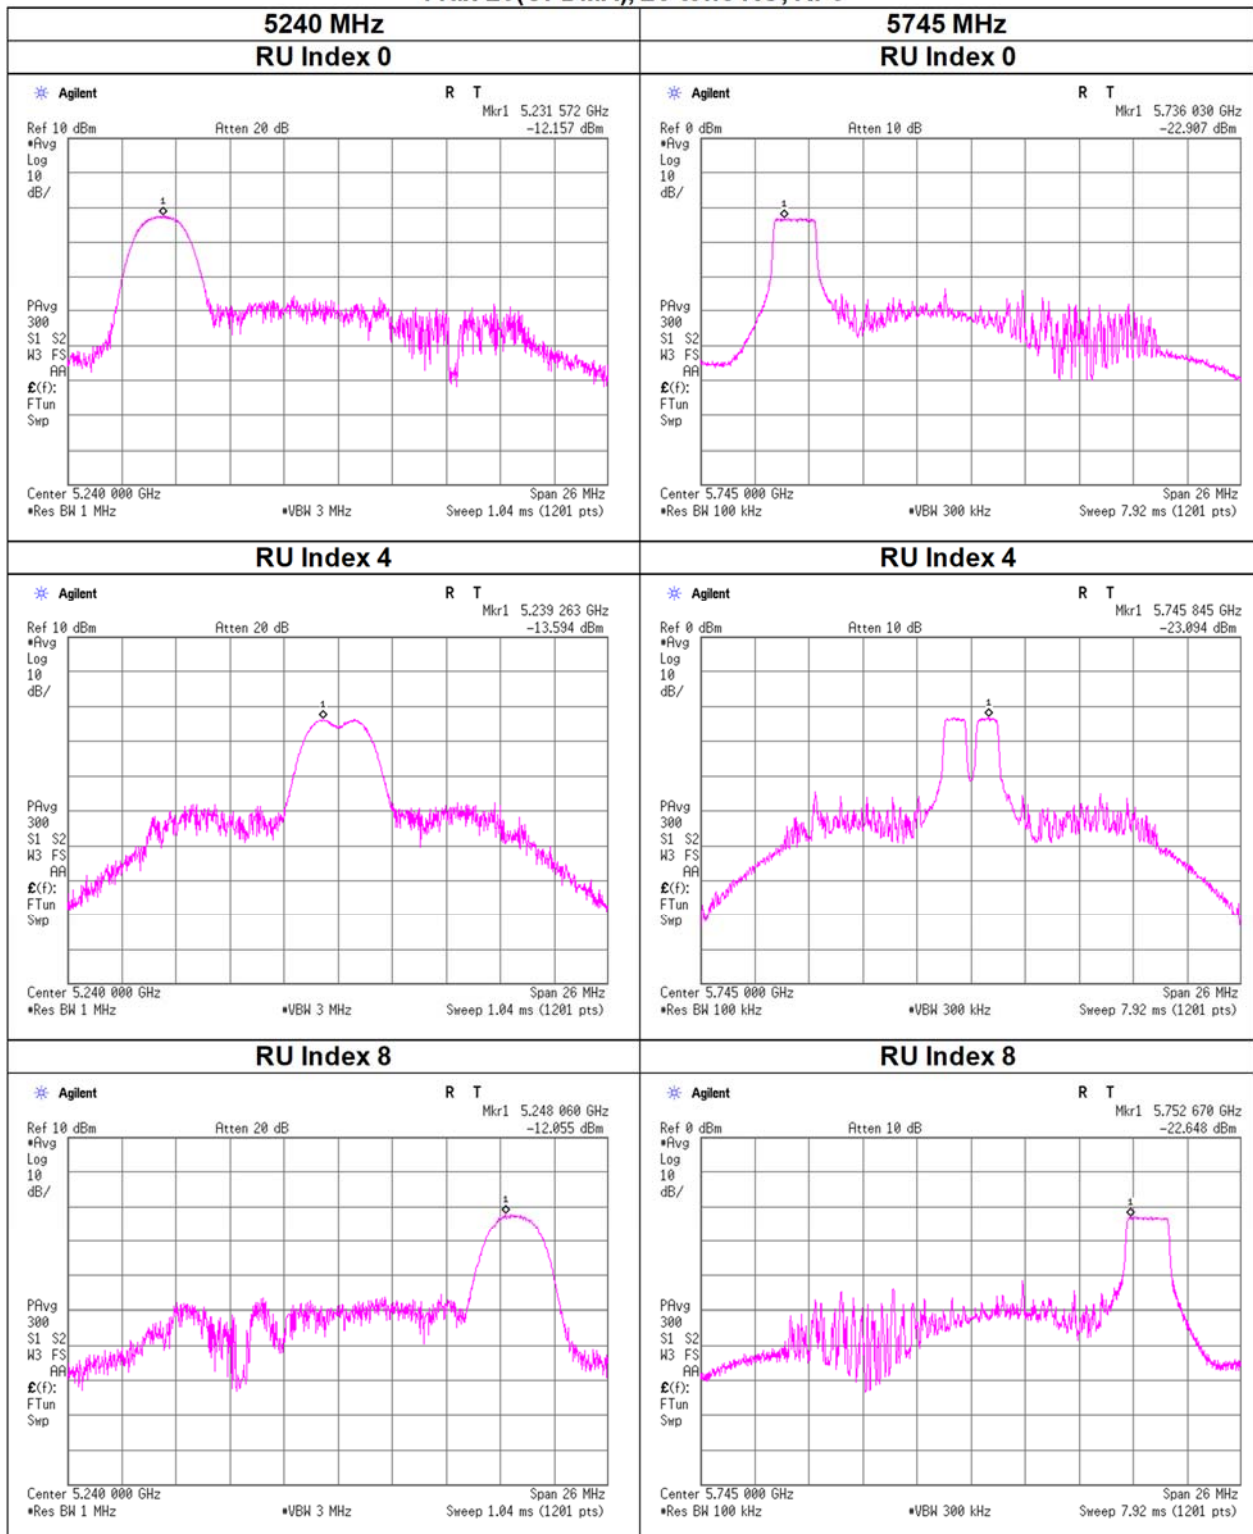


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF0

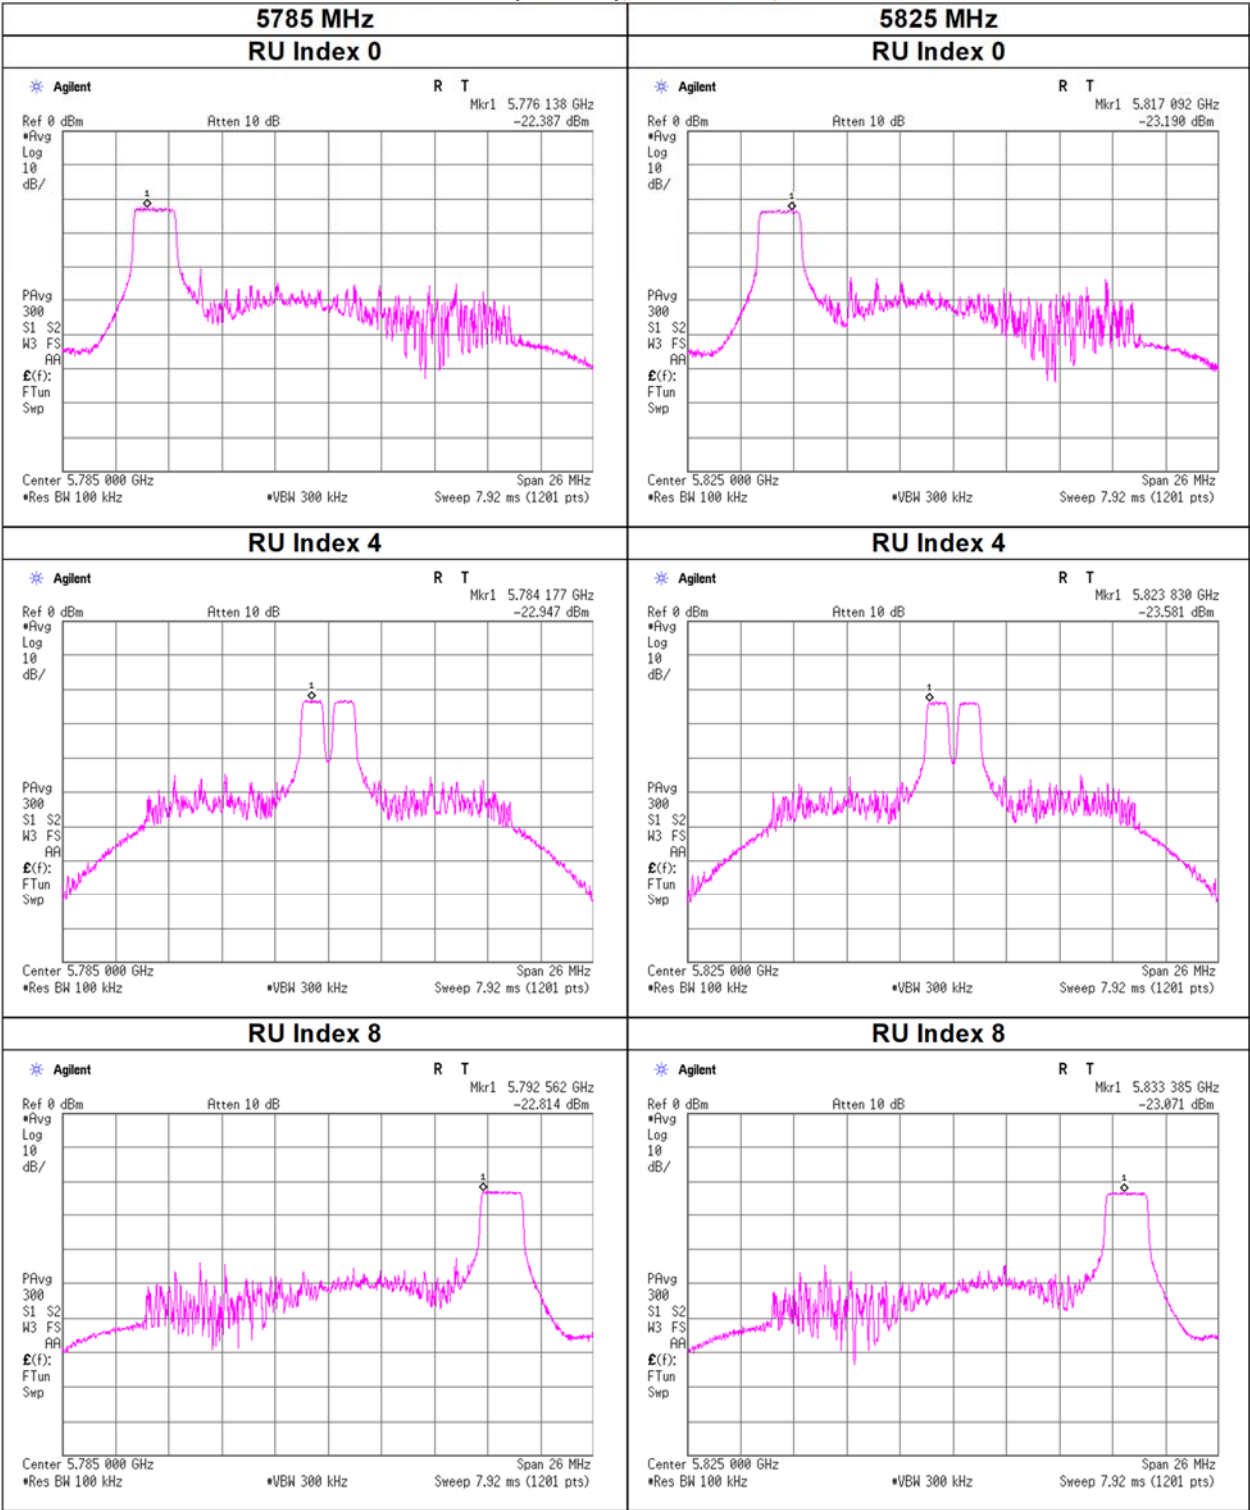


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF1

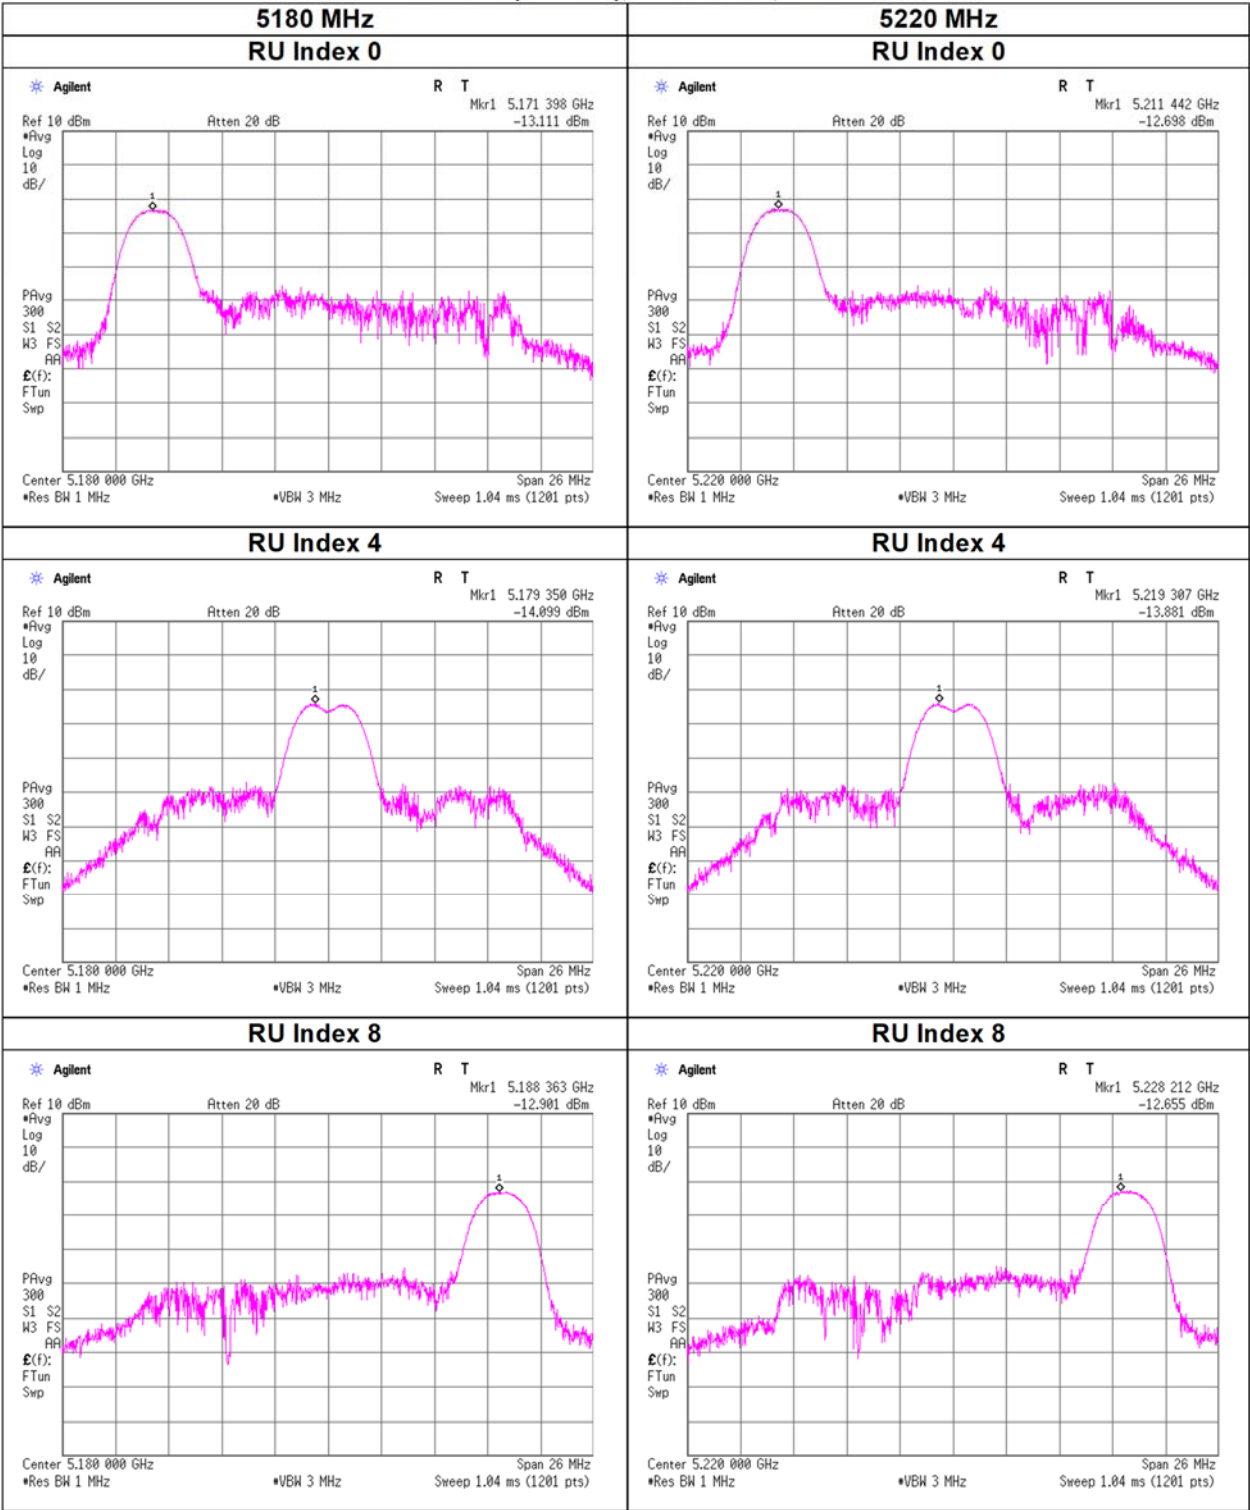


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF1

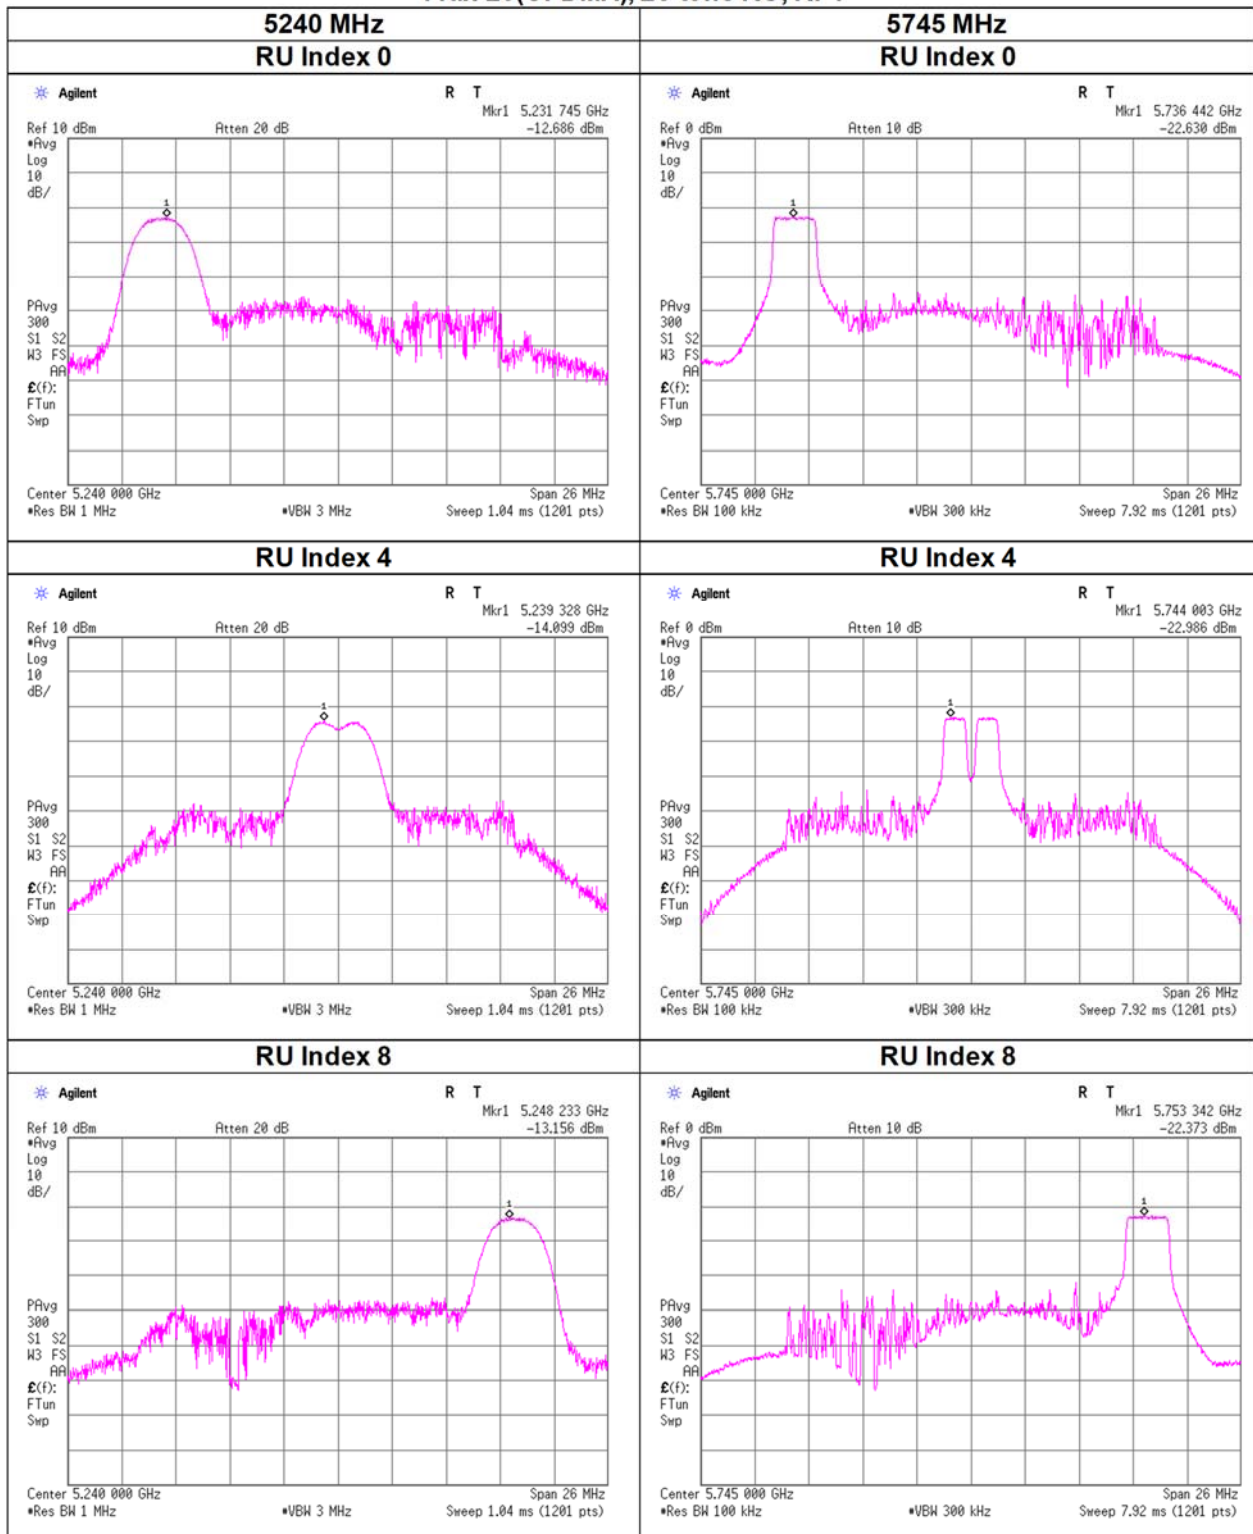


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU, RF1

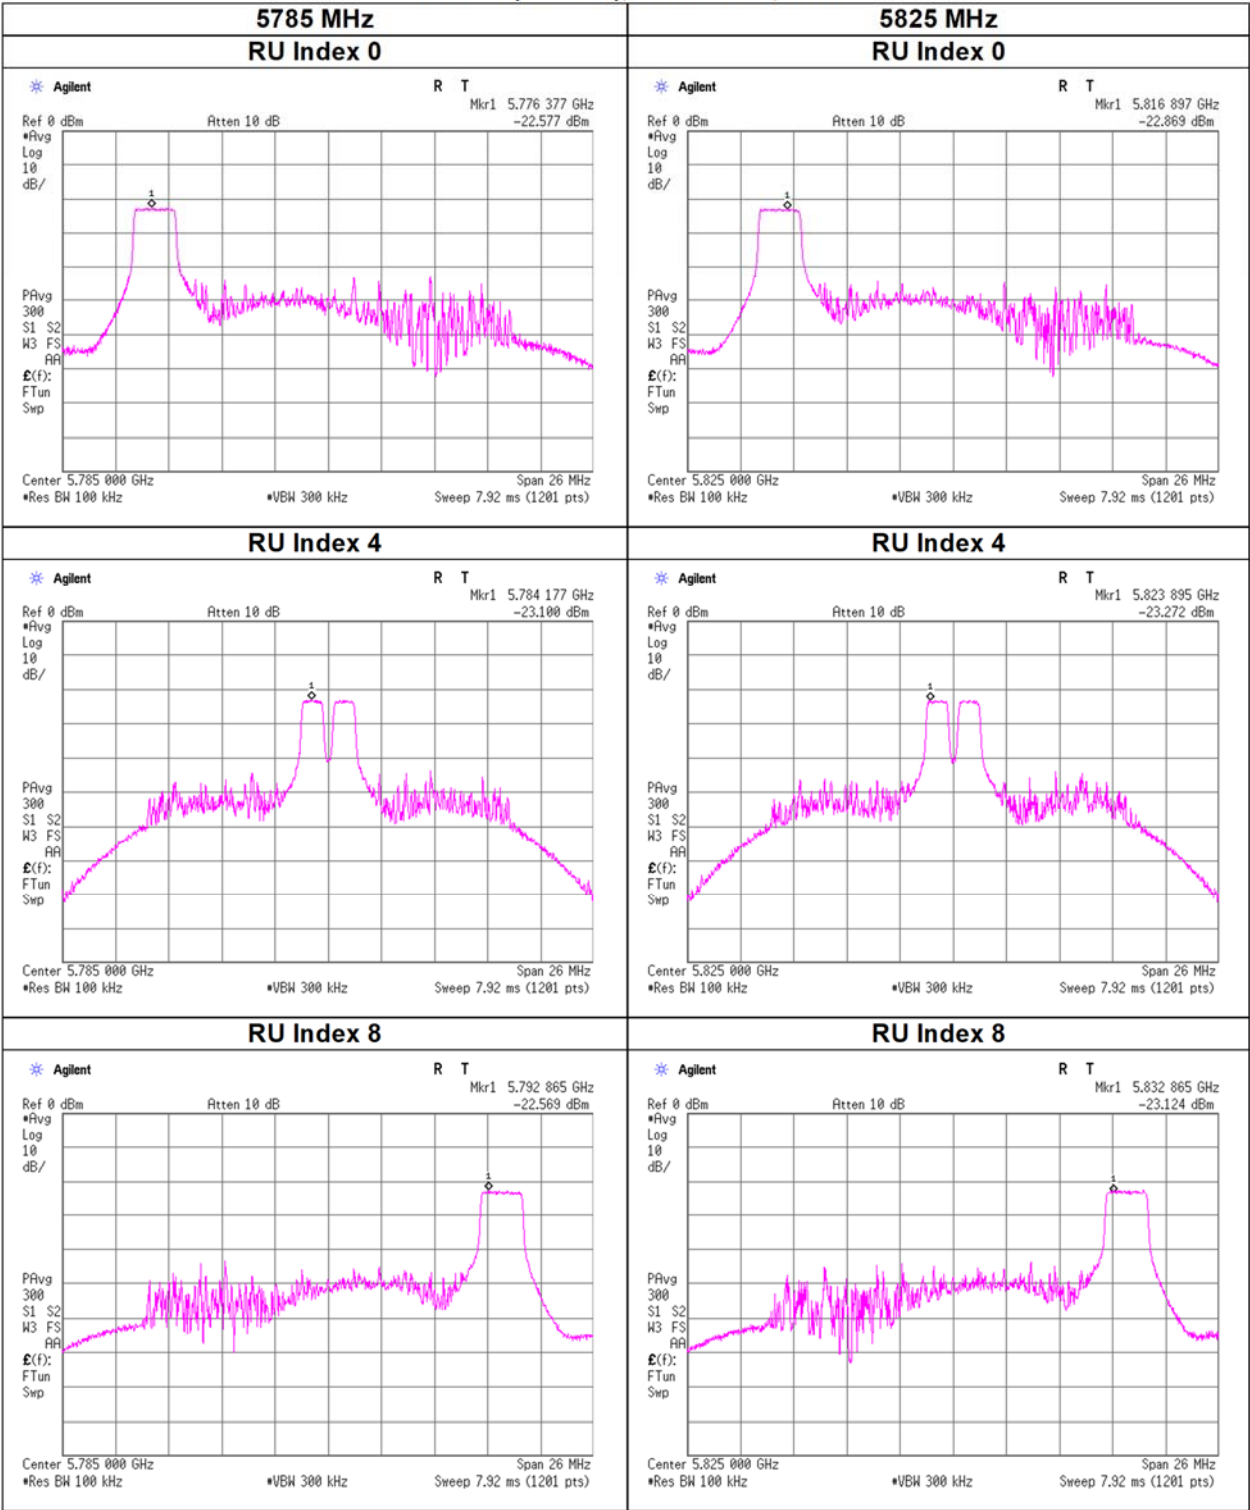


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF0

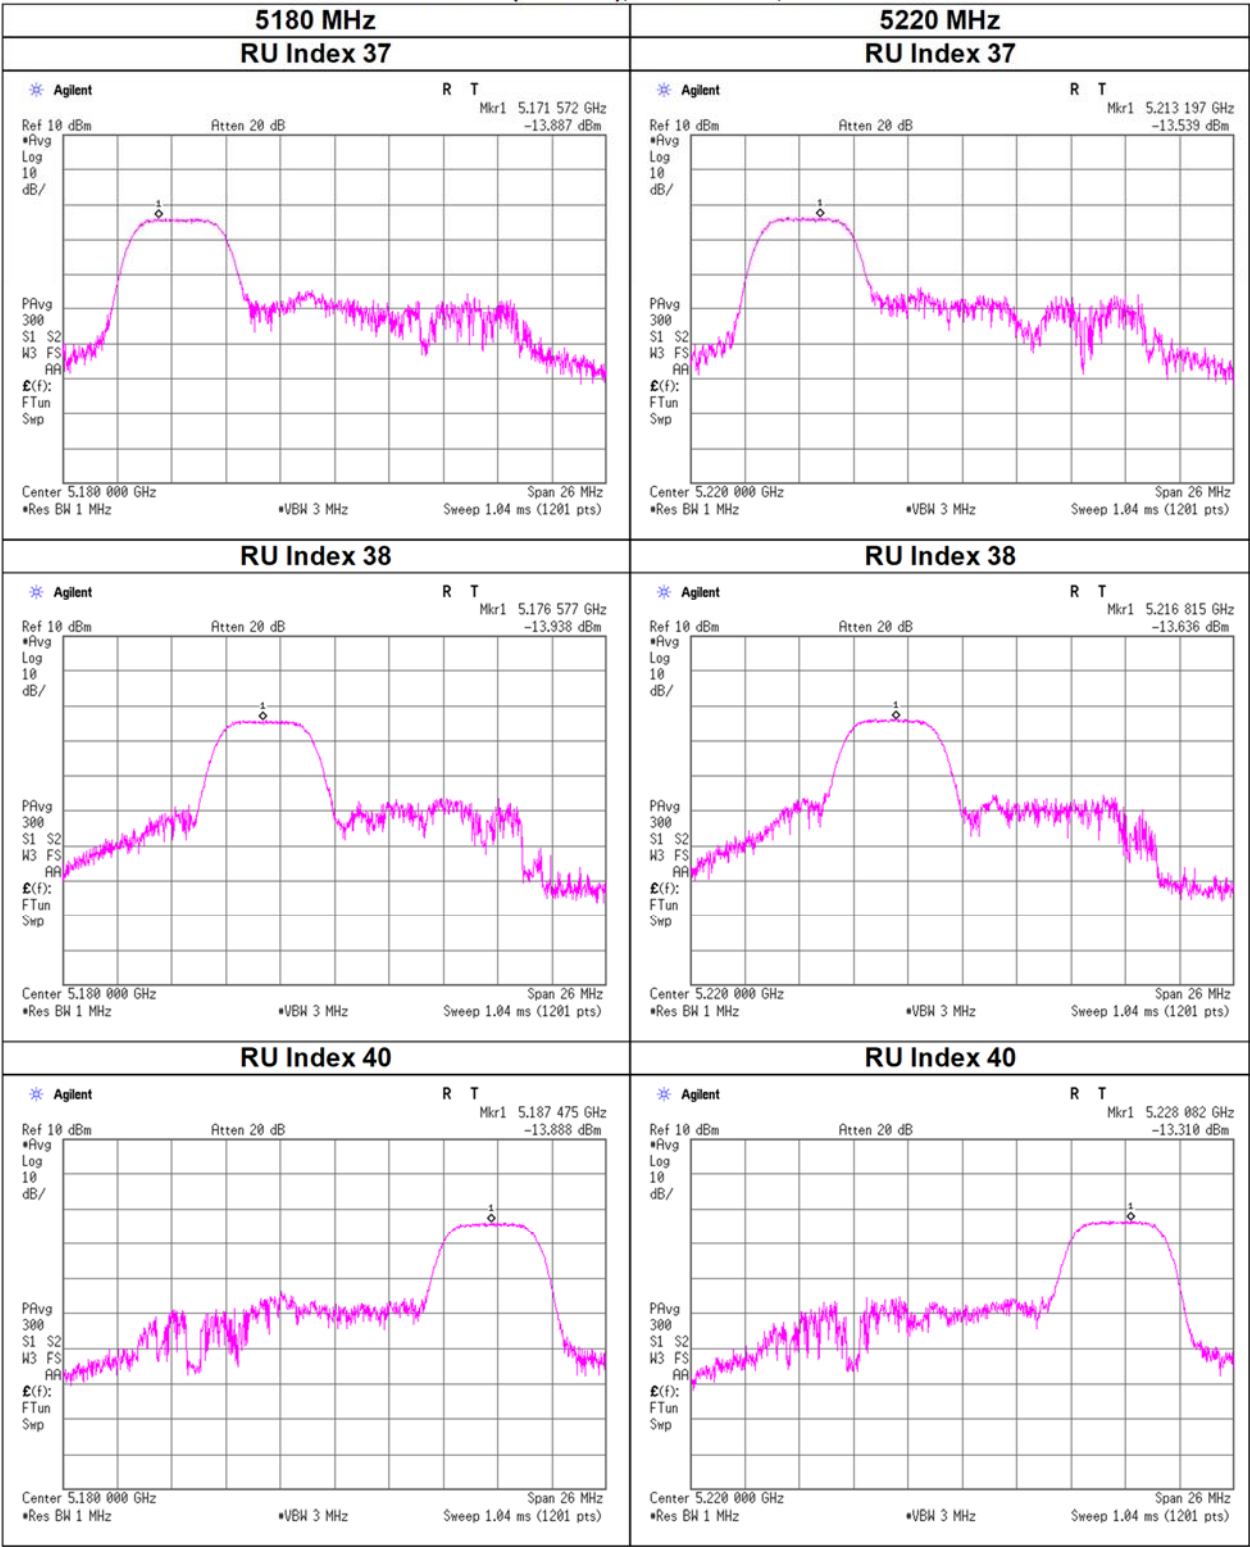


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF0

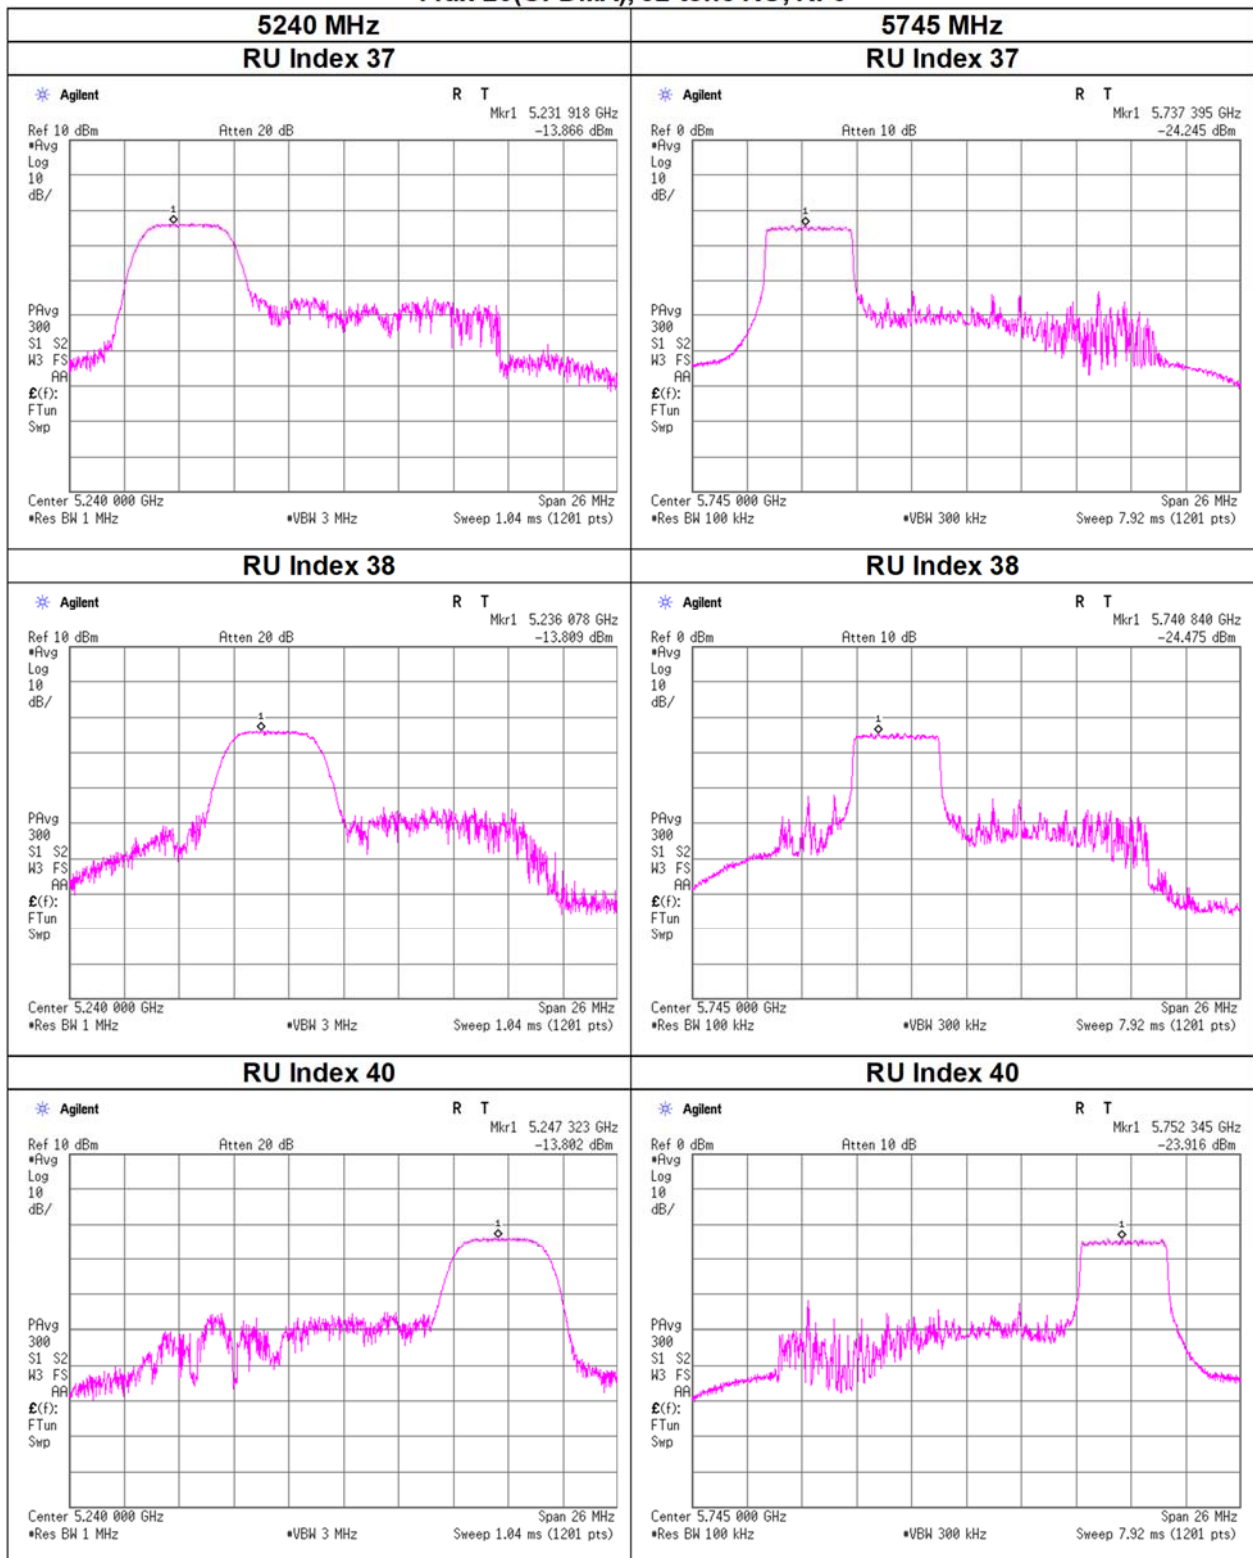


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF0

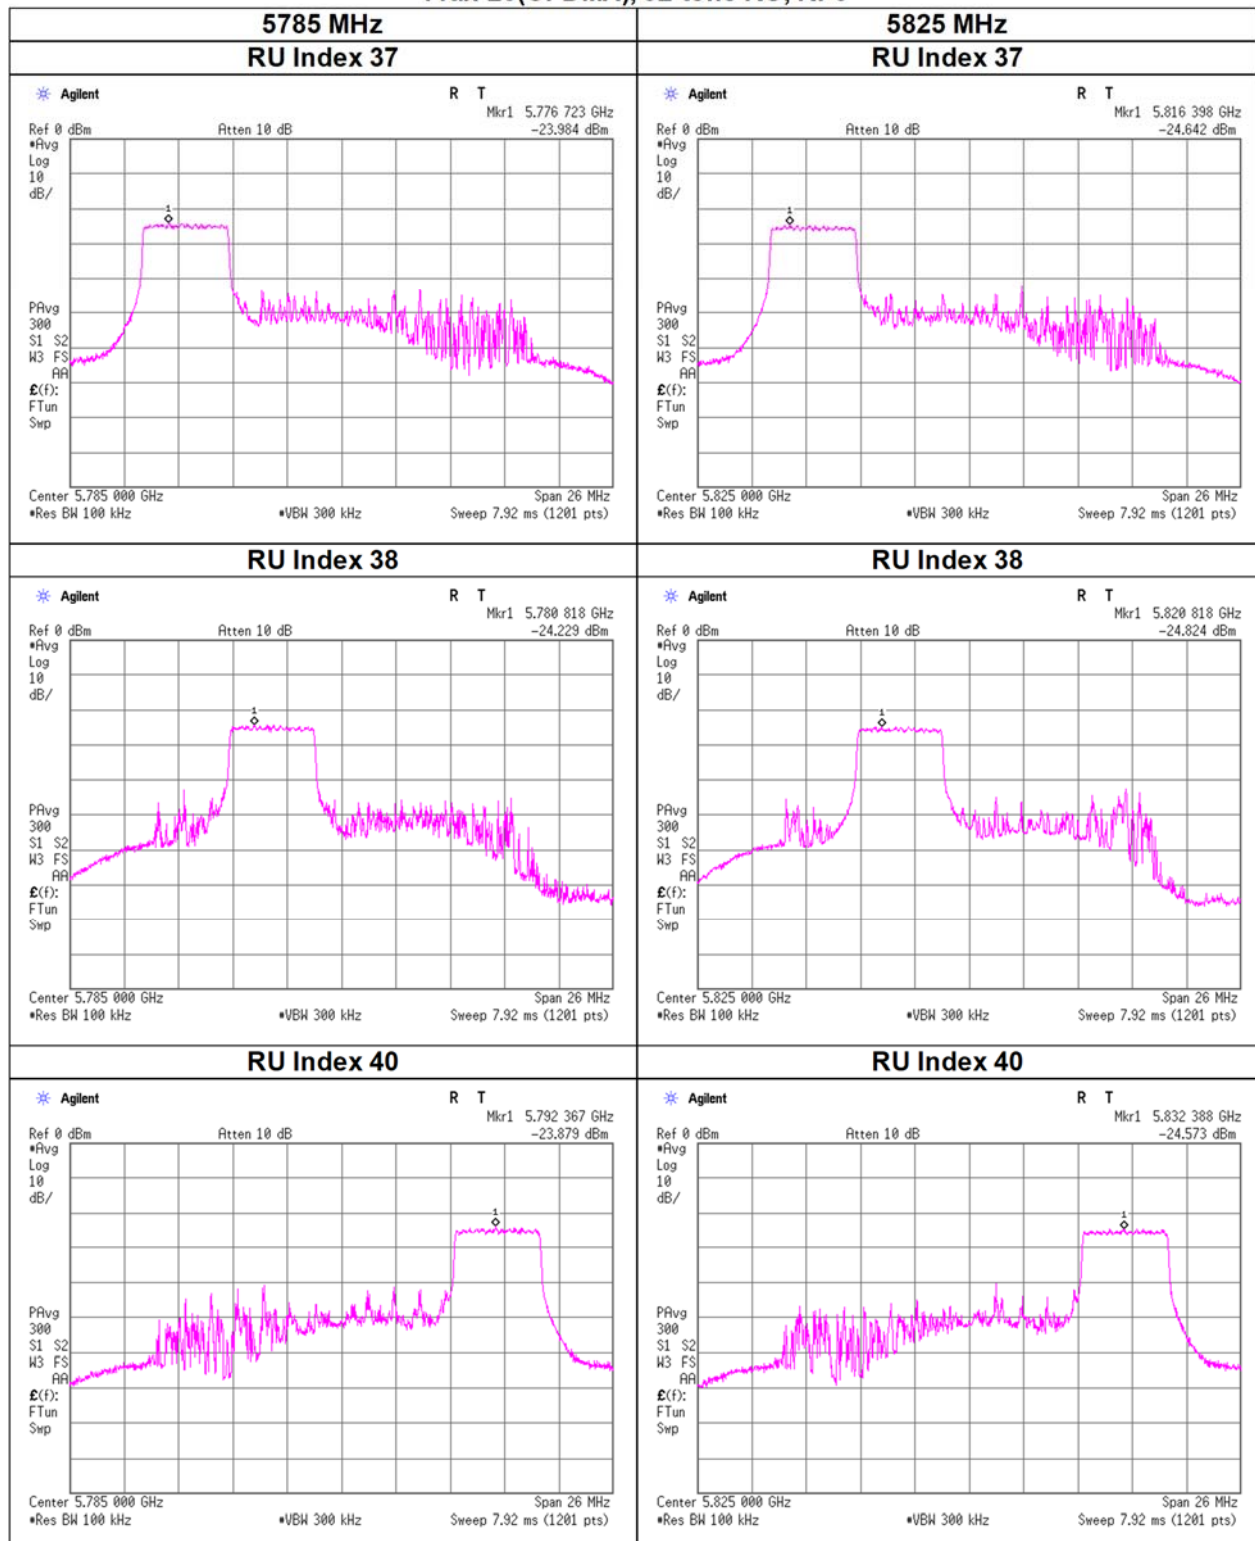


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF1

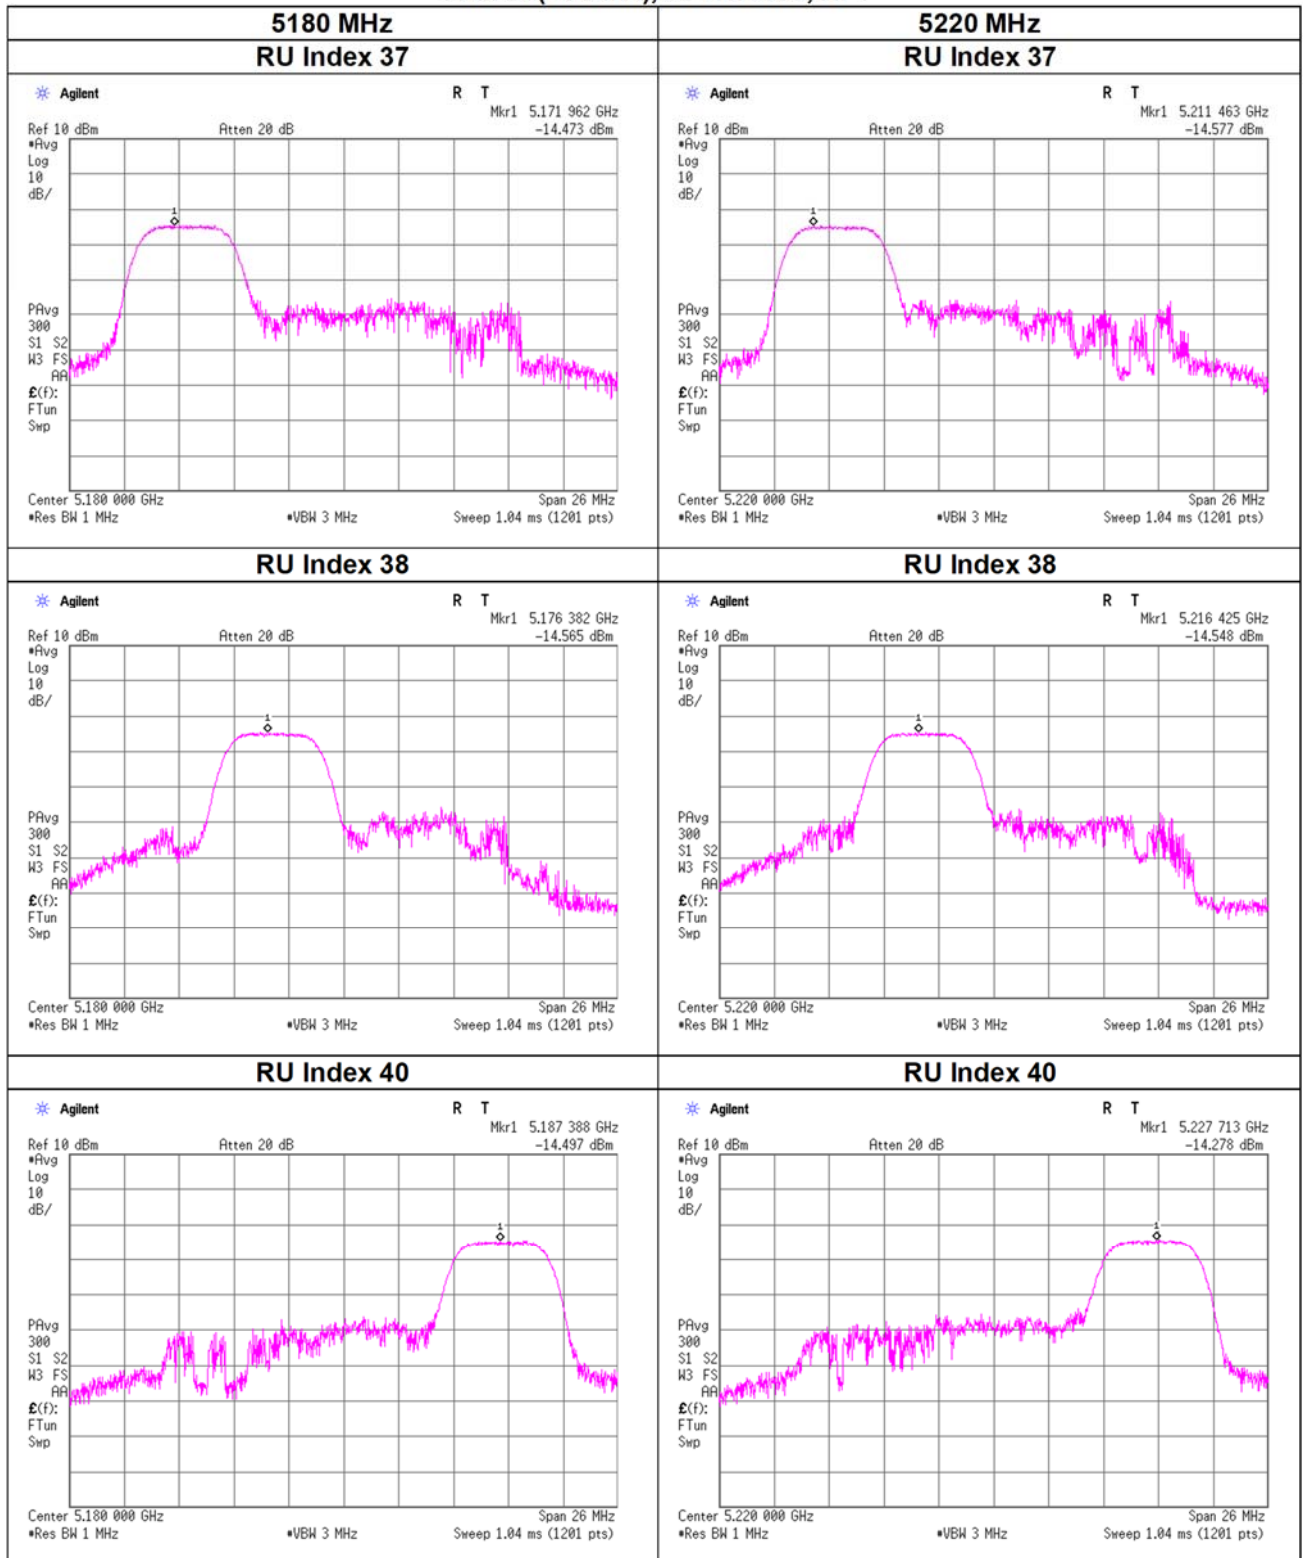


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF1

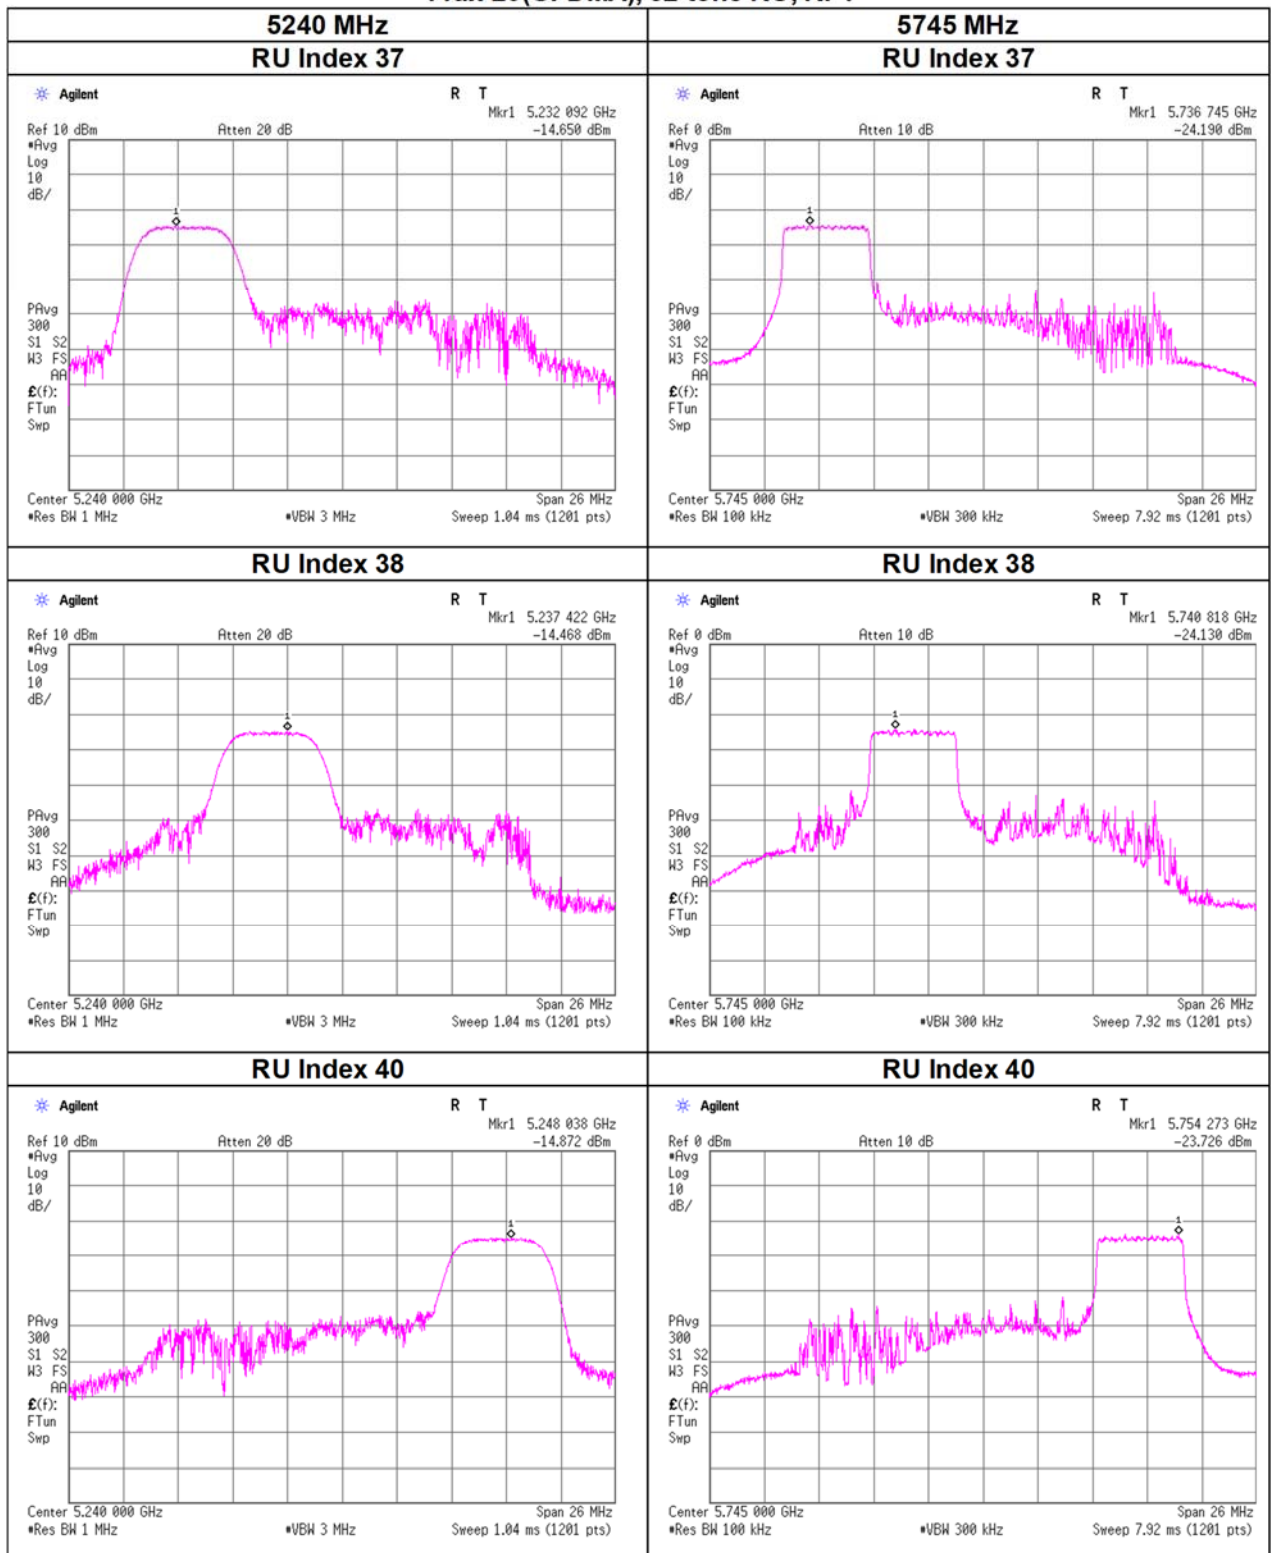


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU, RF1

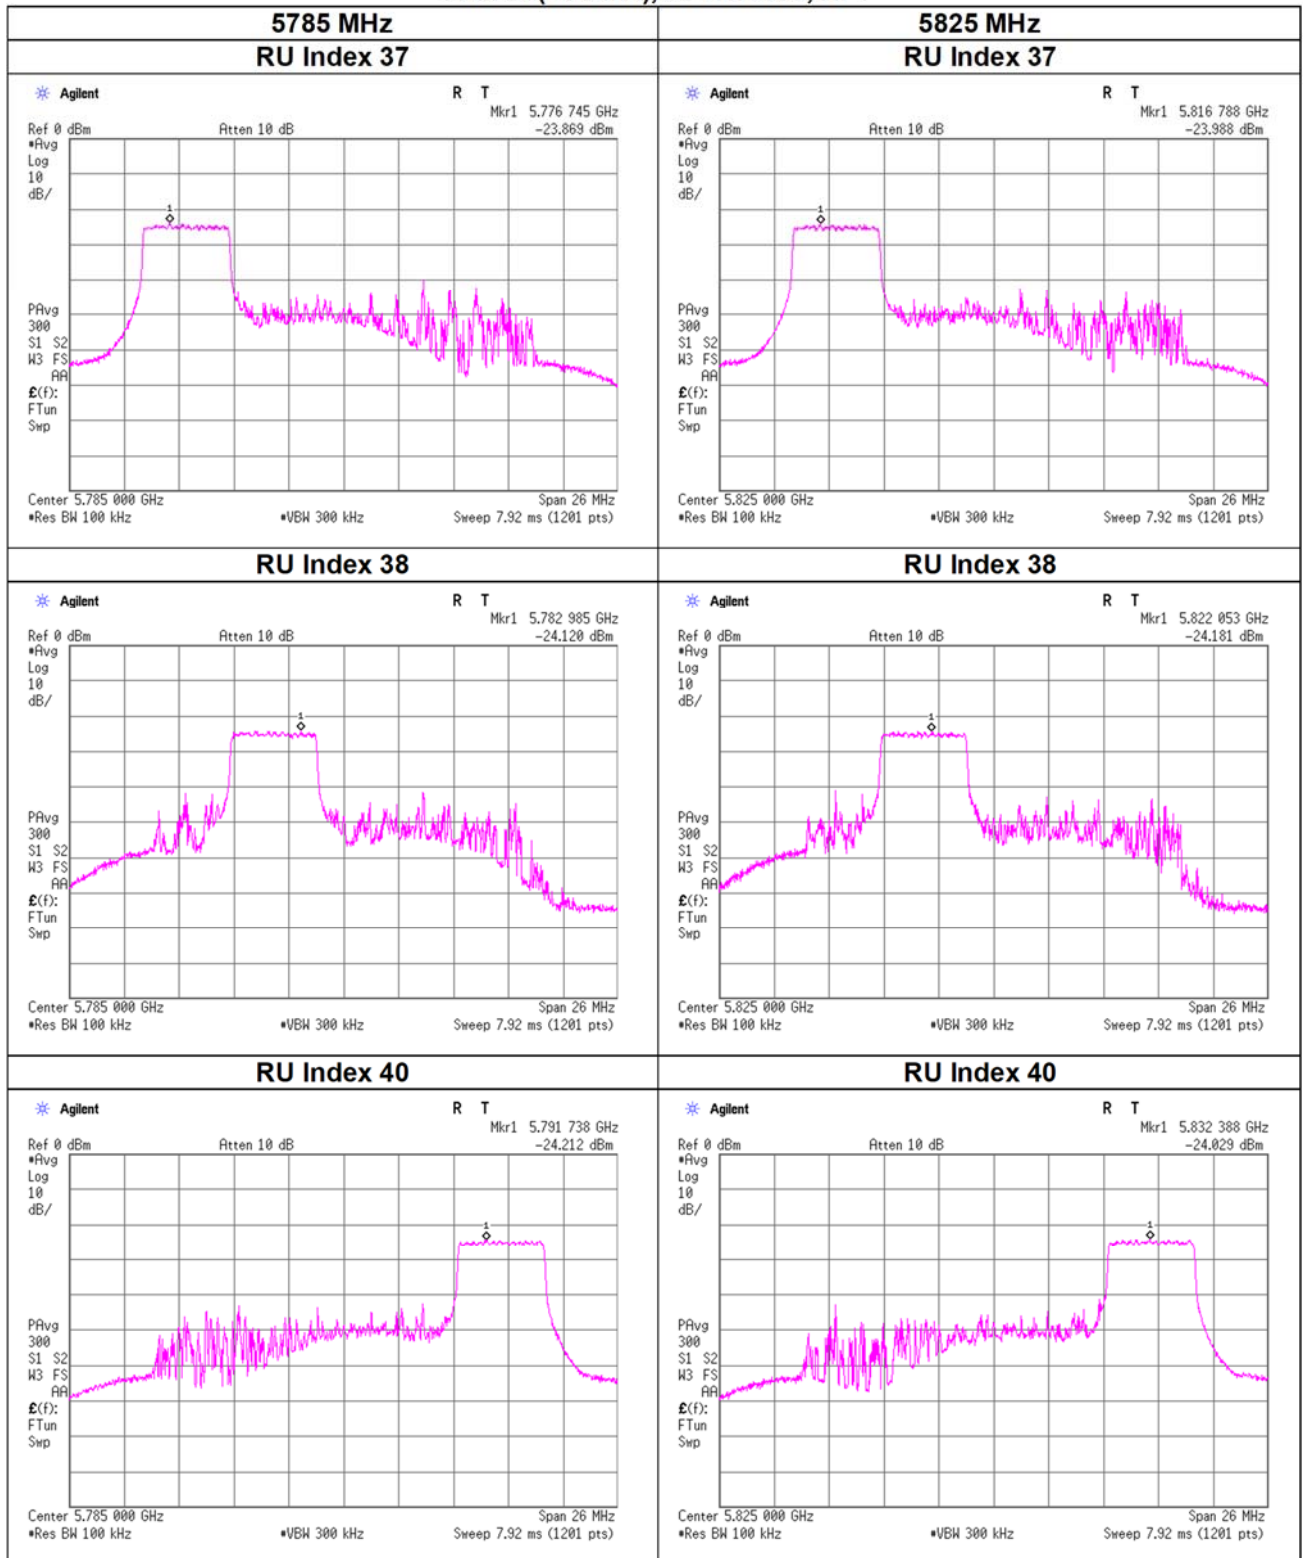


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF0

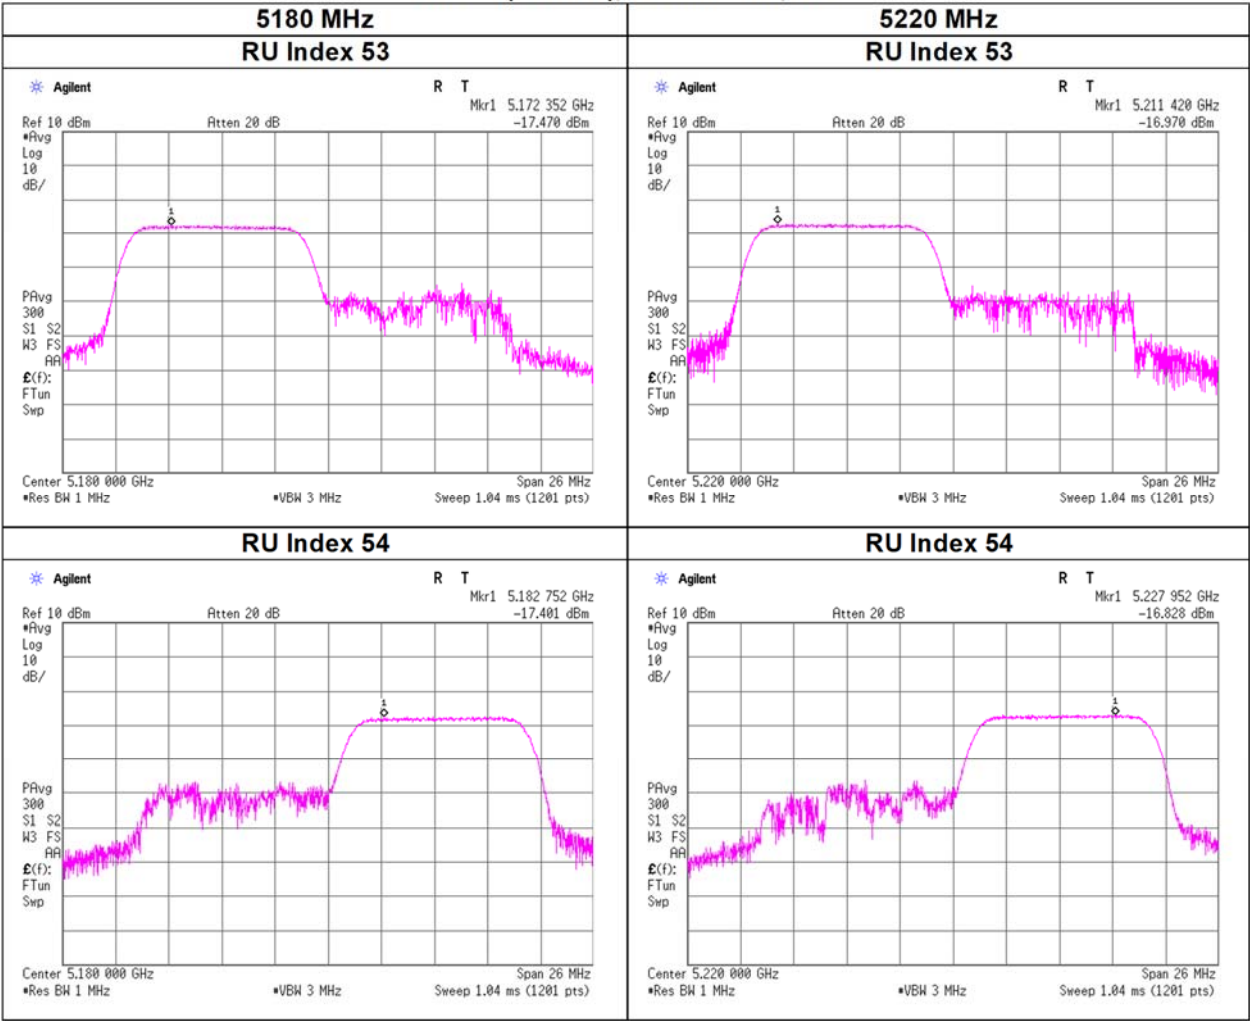


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF0

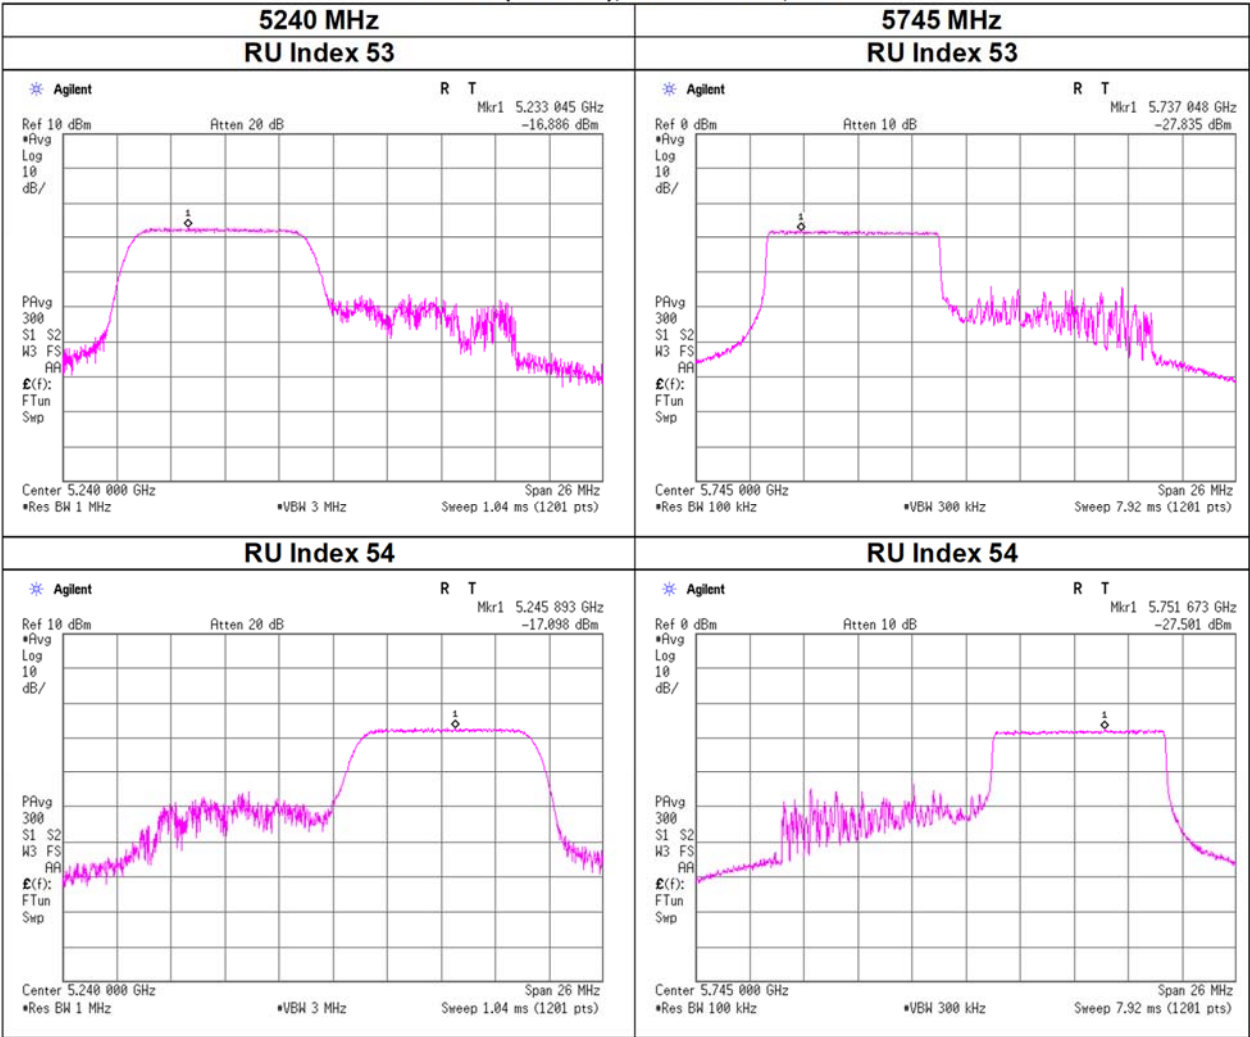


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF0

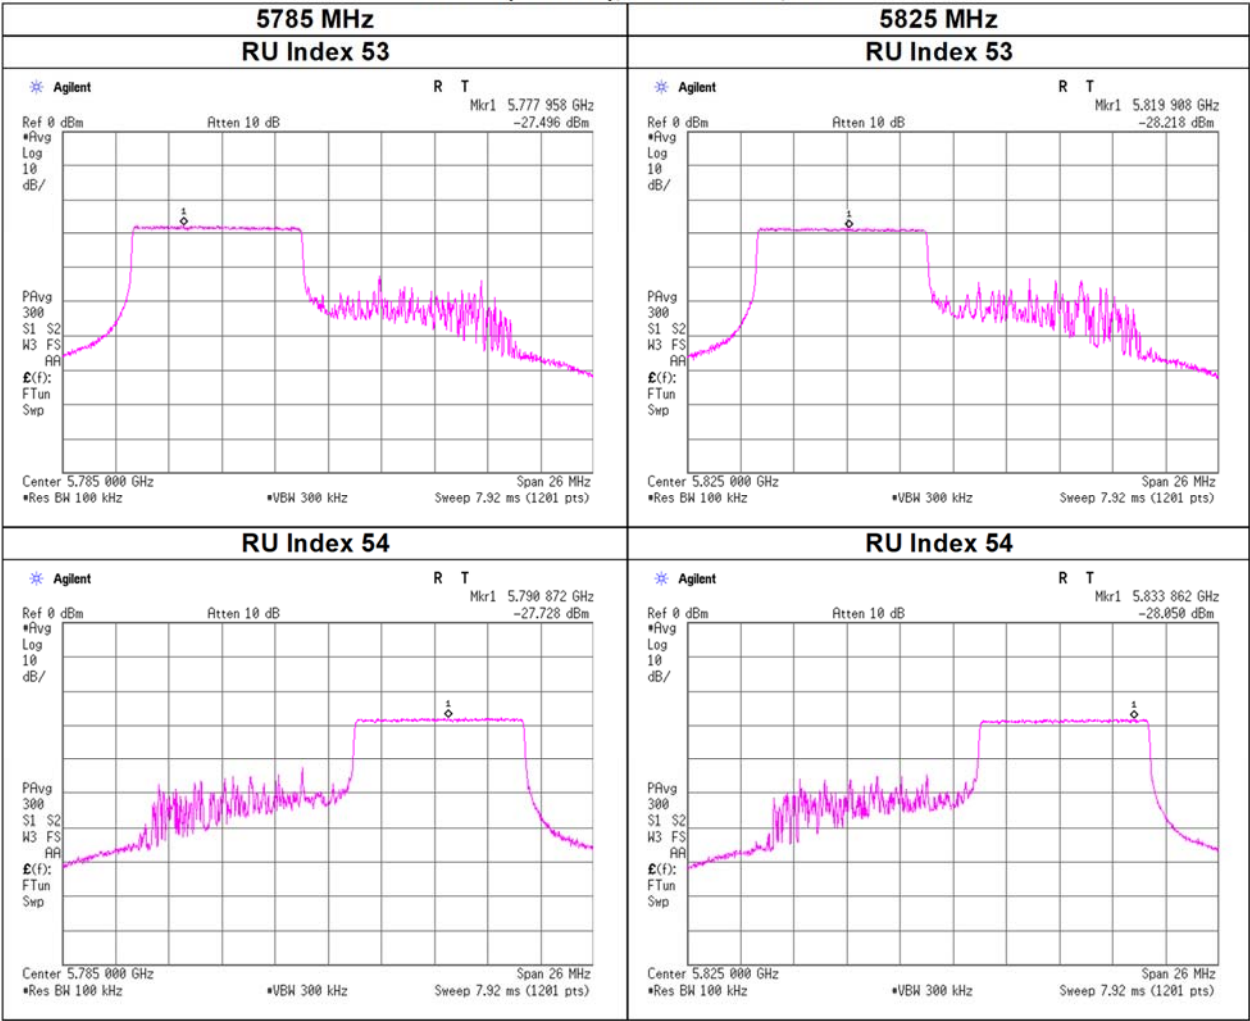


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF1

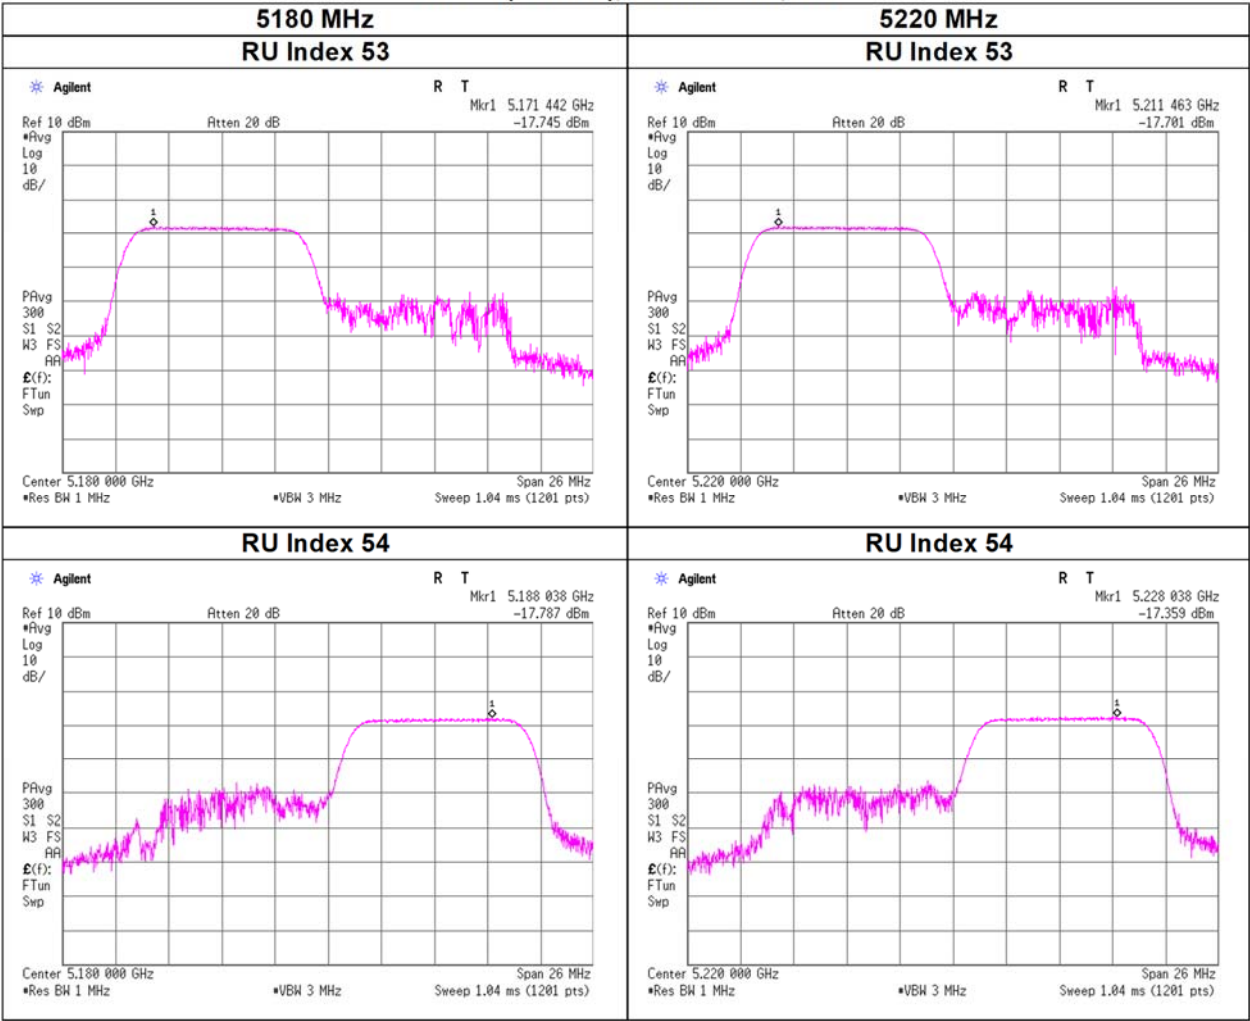


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF1

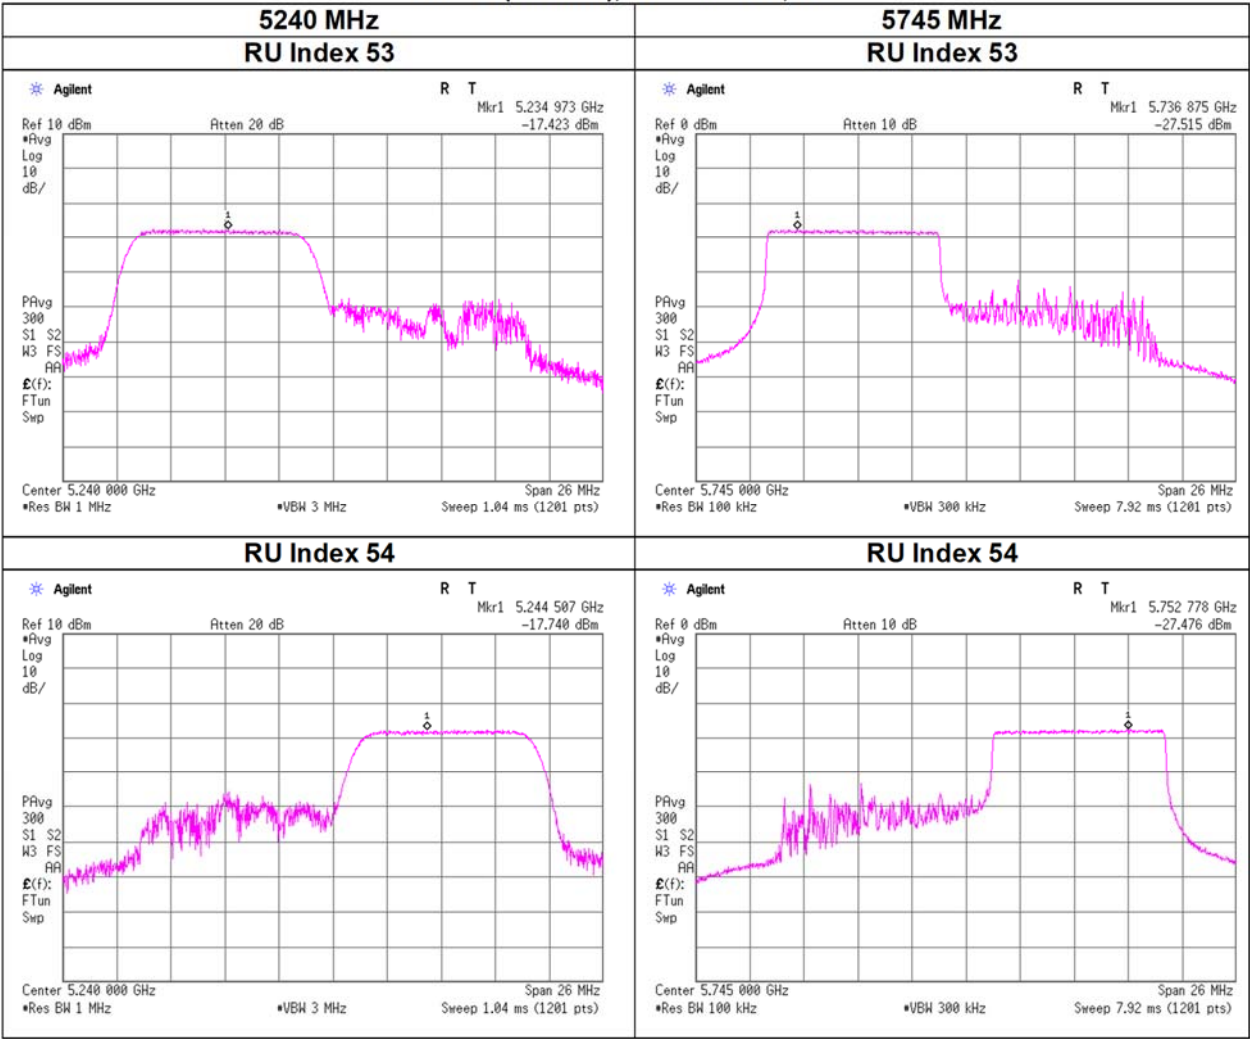

Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU, RF1

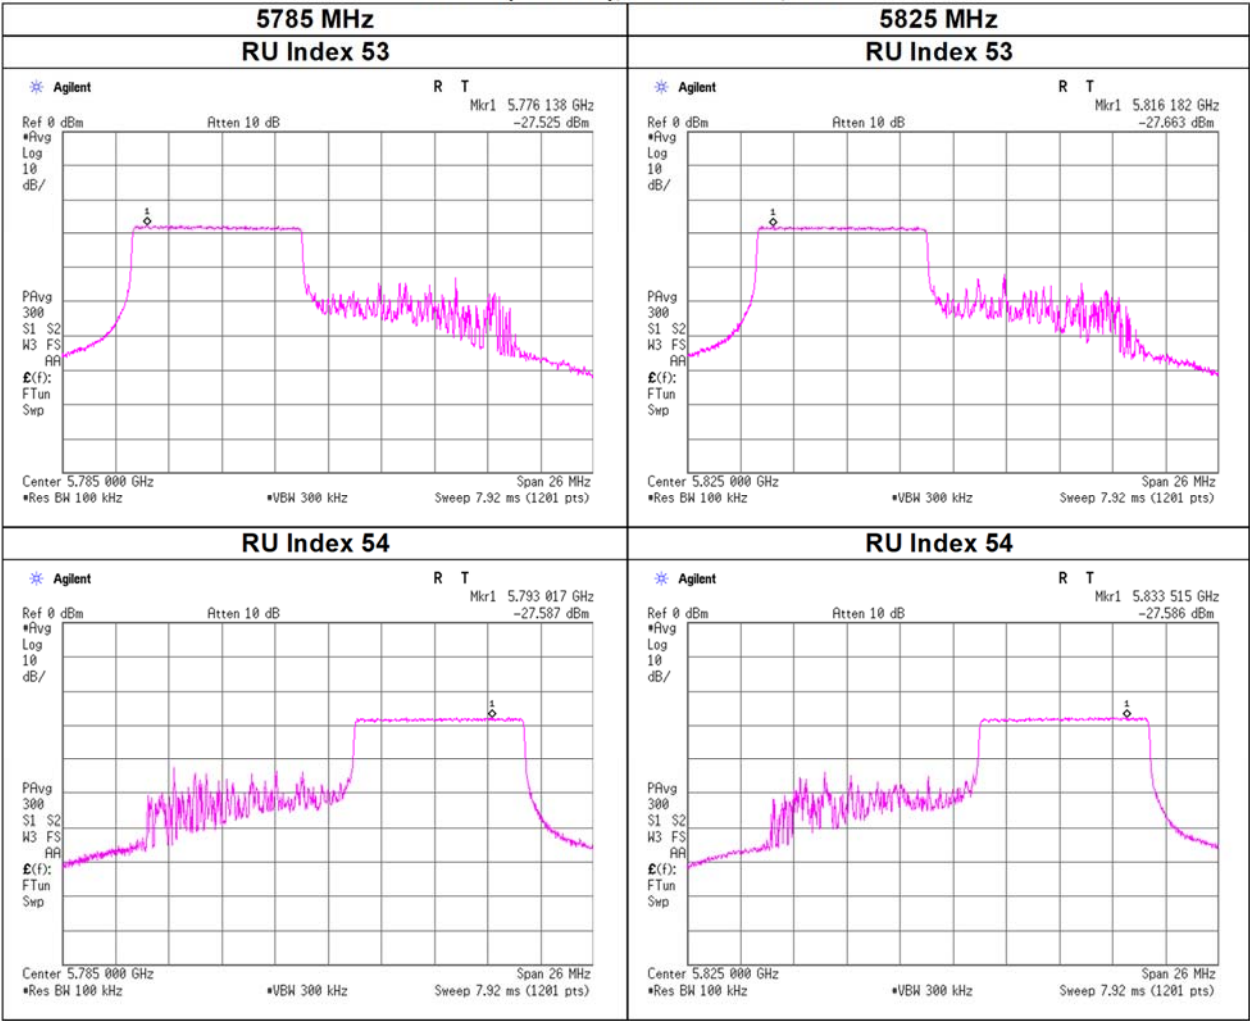

Maximum Power Spectral Density

11ax-20(OFDMA), 242-tone RU, RF0

