


Antenna Data Sheet

SPECIFICATIONS	
Frequency (MHz)	2400–2480
Peak Gain(dBi)	2.499
Average Gain(dBi)	>-4
VSWR	<3.2
Impedance(Ω)	50Ω
Antenna Type	Plannar Inverted FAntenna on board
Polarization	Linear
Manufacturer	Shenzhen HuafuFast Circuit Co Ltd
Address	Room 103, No. 1 Xingye East Road, Dawangshan Community, Shajing Subdistrict, Bao'an District, Shenzhen City, China



测试环境：中科国技暗室测试系统

Testing environment: Zhongke Guoji darkroom testing system

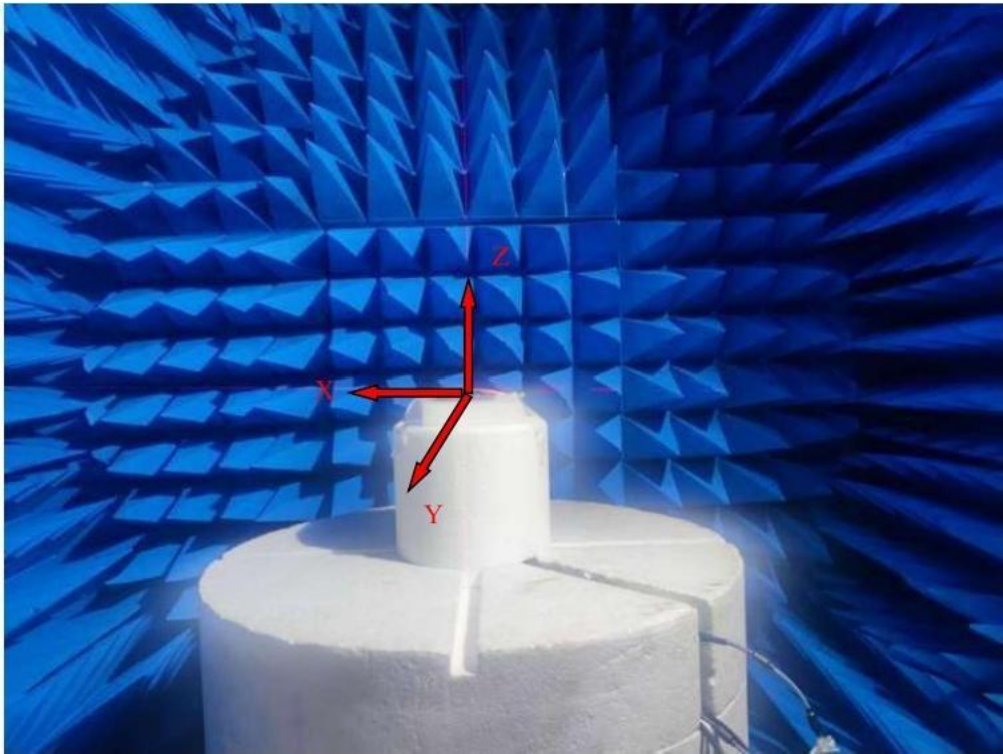

天线实物及物理尺寸

Physical antenna and dimensions

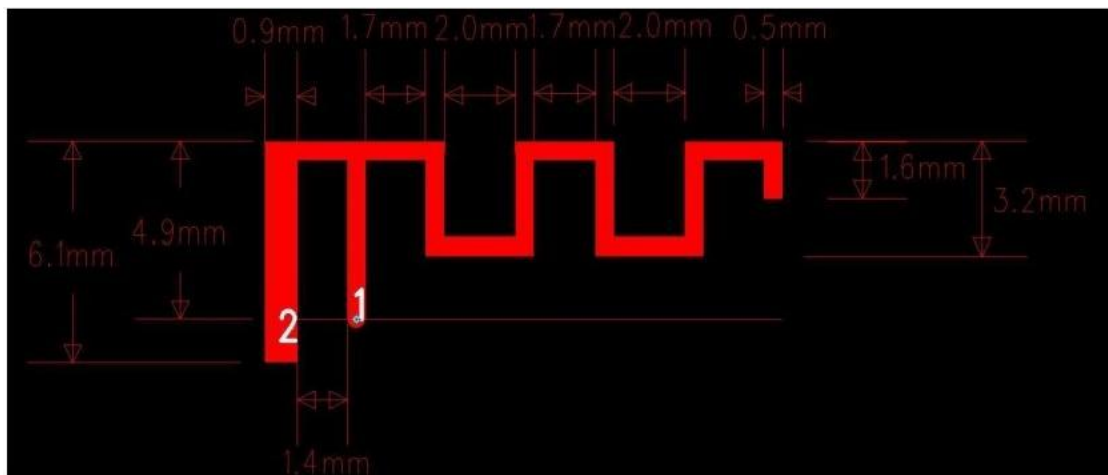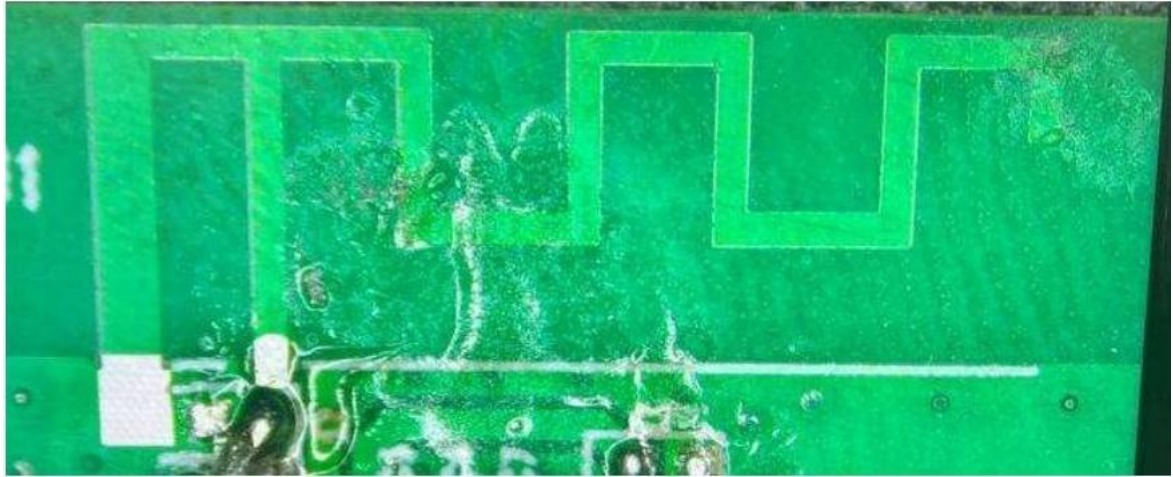


天线无源S 参数：
驻波比（VSWR）、回波损耗（Return Loss）及史密斯圆图




天线效率及增益

Frequency (MHz)	Gain (dBi)	Efficiency (%)	Average Gain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


天线2440MHz 2D-Theta Pattern

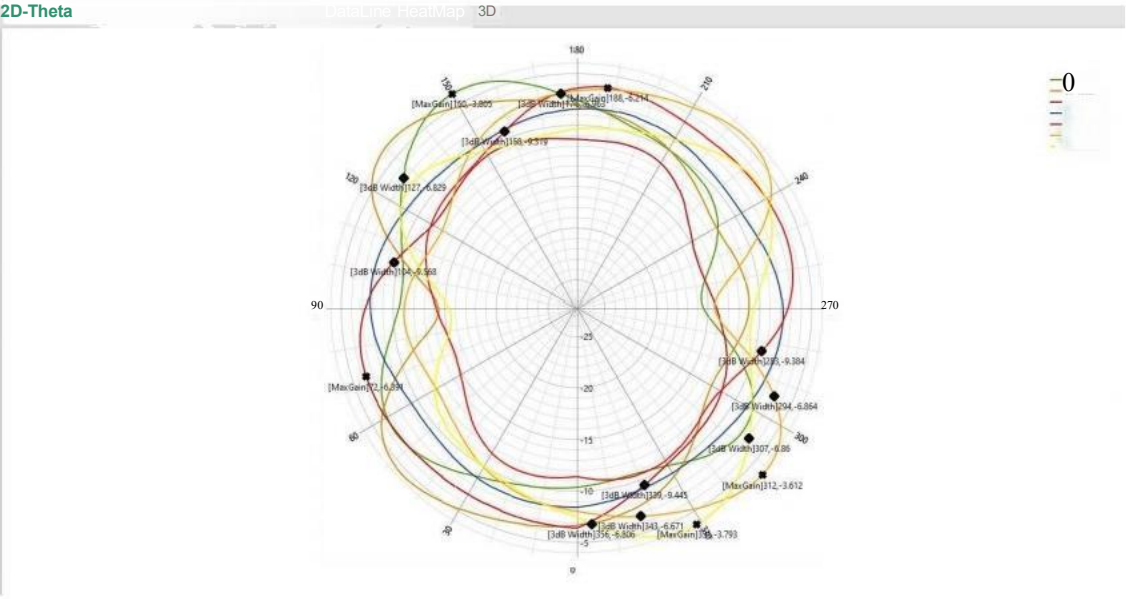

天线2440MHz 3D-Horizontal Pattern

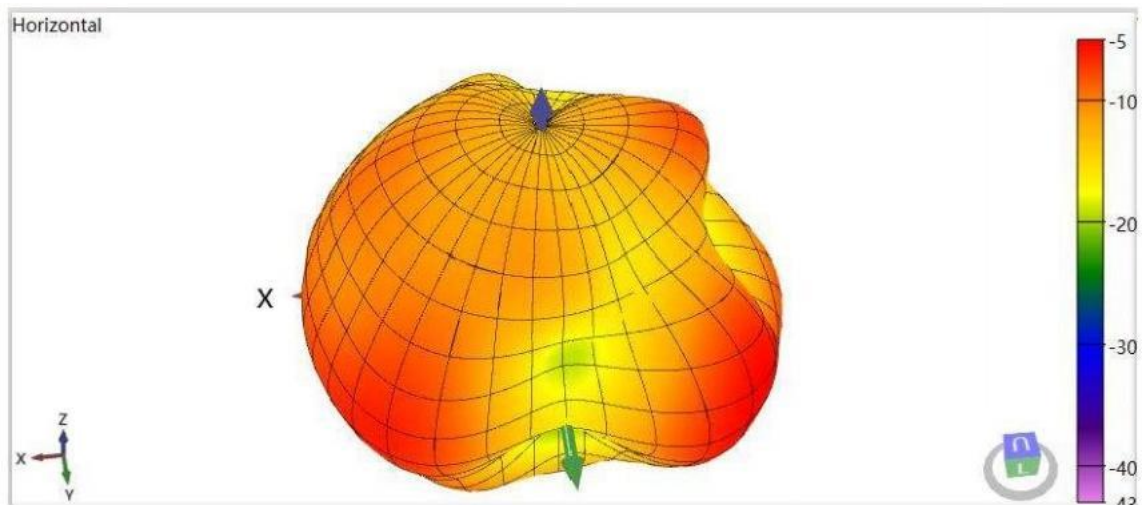

天线2440MHz 3D-Vertical Pattern

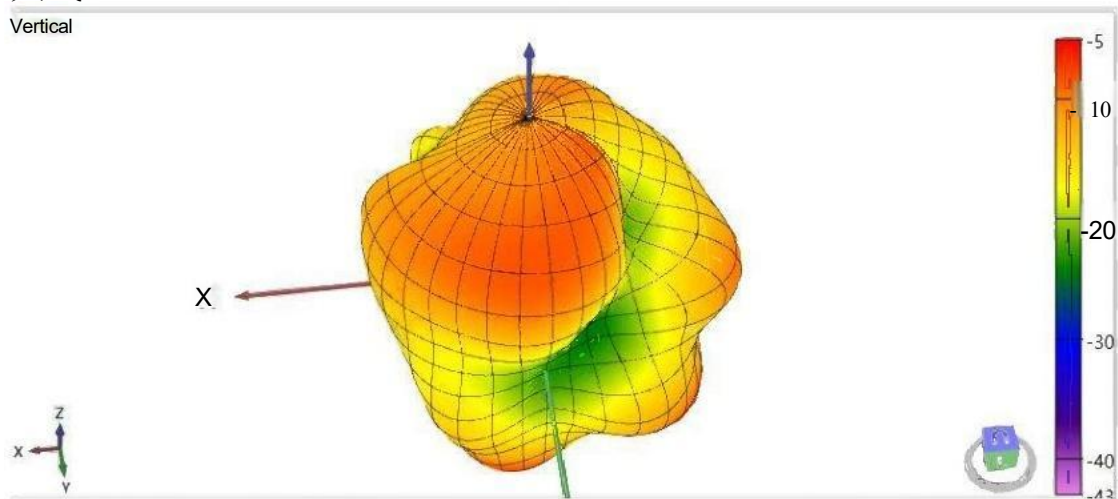

2440MHz 3D-Total Pattern

