

**TYPE OF EXHIBIT:** TEST REPORT

**FCC PART:** 2.1033 (c)(14)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 8, 2002

Following is a list of attached exhibits required by the Federal Communications Commission for the application to and grant of FCC Certification.

|                                                          |                |
|----------------------------------------------------------|----------------|
| Statement of Certifying Engineer .....                   | 2.947          |
| List of Test Equipment Used .....                        | 2.947 (d)      |
| Description of Measurement Facility .....                | 2.948          |
| Required Measurements .....                              | 2.1033 (c)(14) |
| Radio Frequency Power Output .....                       | 2.1046         |
| Modulator Response .....                                 | 2.1047 (a)     |
| Speech Amplifier Low-Pass Filter Response .....          | 2.1047 (a)     |
| Percent of Modulation vs. Modulation Input Voltage ..... | 2.1047 (b)     |
| Occupied Bandwidth .....                                 | 2.1049 (c)(1)  |
| Spurious Emissions at Antenna Terminals .....            | 2.1051         |
| Field Strength of Spurious Emissions .....               | 2.1053         |
| Frequency Stability vs. Temperature .....                | 2.1055 (a)(1)  |
| Frequency Stability vs. Battery Voltage .....            | 2.1055 (d)     |
| Transient Frequency Behavior .....                       | 90.214         |

**TYPE OF EXHIBIT:** STATEMENT OF CERTIFYING ENGINEER  
**FCC PART:** 2.947  
**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 8, 2002

I, Michael A. Pickard, have been employed by RITRON, Inc. since November 1979, working in the Engineering Department since June 1981 as a radio frequency Project Engineer.

I hereby certify that all measurements and data herein were taken by me, that they were obtained using sound and accepted engineering principles, and that they accurately reflect the performance and characteristics of the units tested.

Signed:



Michael A. Pickard - Project Engineer

**TYPE OF EXHIBIT:** TEST EQUIPMENT LIST

**FCC PART:** 2.947 (d)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 8, 2002

The measured data in this report was obtained using one or more of the following pieces of equipment. The particular equipment used in any one test is detailed in the procedure for that test.


| <u>ITEM</u>             | <u>MANUFACTURER</u>     | <u>MODEL NO.</u> | <u>SERIAL NO.</u> |
|-------------------------|-------------------------|------------------|-------------------|
| Communications Test Set | IFR                     | COM-120B         | 500008863         |
| RF Signal Generator     | Marconi Instruments     | 2022             | 119019/120        |
| Spectrum Analyzer       | Hewlett-Packard         | 8560E            | 3720A02980        |
| Audio Sweep Generator   | B & K Precision         | 4010             | 275-00893         |
| Power Supply            | BK/Precision            | 1630             | 146-03508         |
| Digital Oscilloscope    | Philips                 | PM-3335          | DM648004          |
| Dual Display Multimeter | Fluke                   | 45               | 6723040           |
| Digital VOM             | Micronta                | 22-191           | N/A               |
| RF Wattmeter            | Bird                    | 6154             | 8652              |
| Dipole Antenna          | Electro-Metrics         | EM-6924          | 241               |
| Dipole Antenna          | Electro-Metrics         | BDA-25           | 8-101             |
| Log Periodic Antenna    | Electro-Metrics         | LP-25            | 8-102             |
| Microwave Test Antenna  | Polarad                 | CA-B             | 11-3              |
| Temperature Chamber     | Associated Laboratories | ELH-0.5-LC       | N/A               |
| Thermocouple            | Omega                   | 7035-J-225       | 8504              |
| 30dB Power Attenuator   | Bird                    | 8306-300-N       | N/A               |
| 10dB Attenuator         | ELCOM                   | AT-51-10         | N/A               |
| RF Detector             | Microlabs/FXR           | XA-1040          | N/A               |

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| <b>TYPE OF EXHIBIT:</b> | DESCRIPTION OF MEASUREMENT FACILITY                       |
| <b>FCC PART:</b>        | 2.948                                                     |
| <b>MANUFACTURER:</b>    | RITRON, INC.<br>505 West Carmel Drive<br>Carmel, IN 46032 |
| <b>MODEL:</b>           | PBS-446D                                                  |
| <b>TYPE OF UNIT:</b>    | UHF-FM Base Transceiver                                   |
| <b>FCC ID:</b>          | AIERIT16-446                                              |
| <b>DATE:</b>            | November 8, 2002                                          |

The Field Strength measurements filed with this application were made on a site certified by RITRON, Inc. Data pertaining to this site is on file with the FCC and is current.

This site is used exclusively by RITRON, Inc. and is utilized only for the RF Field Strength Measurements of equipment designed and manufactured by RITRON, Inc. It is NOT used for measurements by or for any other party on a contract basis or otherwise.

Signed:



Michael A. Pickard - Project Engineer

**TYPE OF TEST:** RADIO FREQUENCY POWER OUTPUT

**FCC PART:** 2.1046

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** October 30, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 450.050, 460.050 and 470.050 MHz (Fo) at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual. This represents frequencies at the low, middle and high end of the PBS-446D operating frequency band.
2. Power was supplied to the PBS-446D via P302 by a BK Precision Model 1630 power supply. The PBS-446D was connected at antenna terminal J201 to the input of a Bird 6154 Thermaline Wattmeter, used to measure RF power of the carrier.
3. A BK Model 2704A Digital Multimeter was connected in series with L202 to measure the collector current of Q205, the final RF amplifier device. A Micronta Model 22-191 Digital Multimeter was used to measure Q205 collector supply voltage at L202.
4. Q201, Q202 and digital pot U306B set the supply voltage to the transmitter. Measurements were taken with the transmitter supply set for low and high power operation at each frequency.

**TYPE OF TEST:** RADIO FREQUENCY POWER OUTPUT

**FCC PART:** 2.1046

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver


**FCC ID:** AIERIT16-446

**DATE:** October 30, 2002

**TEST RESULTS:**

| Frequency (MHz) | High/Low Power | Collector Voltage (VDC) | Collector Current (Amps) | Input Power (Watts) | Output Power (Watts) | Efficiency |
|-----------------|----------------|-------------------------|--------------------------|---------------------|----------------------|------------|
| 450.050         | Low            | 5.6                     | 0.29                     | 1.62                | 1.00                 | 61.7%      |
|                 | High           | 8.0                     | 0.46                     | 3.68                | 2.50                 | 67.9%      |
| 460.050         | Low            | 6.0                     | 0.28                     | 1.68                | 1.00                 | 59.5%      |
|                 | High           | 8.25                    | 0.43                     | 3.55                | 2.50                 | 70.4%      |
| 470.050         | Low            | 6.2                     | 0.27                     | 1.67                | 1.00                 | 59.9%      |
|                 | High           | 8.6                     | 0.42                     | 3.61                | 2.50                 | 69.3%      |

Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** MODULATOR RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** October 30, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual.
2. The PBS-446D speech amplifier was disconnected from the modulator at R349. The output of a BK Precision Model 4010 Function Generator was connected to R349 through a 100 $\mu$ F capacitor.
3. The PBS-446D was connected at antenna terminal P201 to the 50 $\Omega$  RF input of the IFR COM-120B, which was used to measure FM deviation.
4. The audio signal generator was set to a frequency of 1000 Hz and the output was adjusted to provide +/- 1.5 kHz deviation (60% rated system deviation) as indicated by the IFR COM-120B. This output level was 180mVP.
5. With the audio generator output level fixed at 180 mVP, the frequency was varied from 100 - 5000 Hz. Deviation was measured at various frequencies within this range and recorded on the accompanying chart.
6. A separate measurement was made for sub-audible tones. The audio signal generator was set for various sub-audible tones between 67 - 250 Hz at an output level of 60 mVP, the level required to produce 500 Hz deviation at 100 Hz. There was no variation in resulting deviation across the sub-audible frequency range.

**TYPE OF TEST:** MODULATOR RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** October 30, 2002

**TEST RESULTS:**

Test Frequency: 460.050 MHz  
Input Voltage required for 60% deviation at 1000 Hz: 180 mVP

| Modulation<br>Frequency<br>(Hz) | Frequency<br>Deviation<br>(+/- kHz) | Percent<br>System<br>Deviation |
|---------------------------------|-------------------------------------|--------------------------------|
| 100                             | 1.52                                | 60.8%                          |
| 200                             | 1.54                                | 61.6%                          |
| 400                             | 1.52                                | 60.8%                          |
| 800                             | 1.51                                | 60.4%                          |
| 1000                            | 1.50                                | 60.0%                          |
| 2000                            | 1.43                                | 57.2%                          |
| 3000                            | 1.35                                | 54.0%                          |
| 4000                            | 1.23                                | 49.2%                          |
| 5000                            | 1.01                                | 40.4%                          |

Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** MODULATOR RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032


**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** October 30, 2002

**CURVE:**

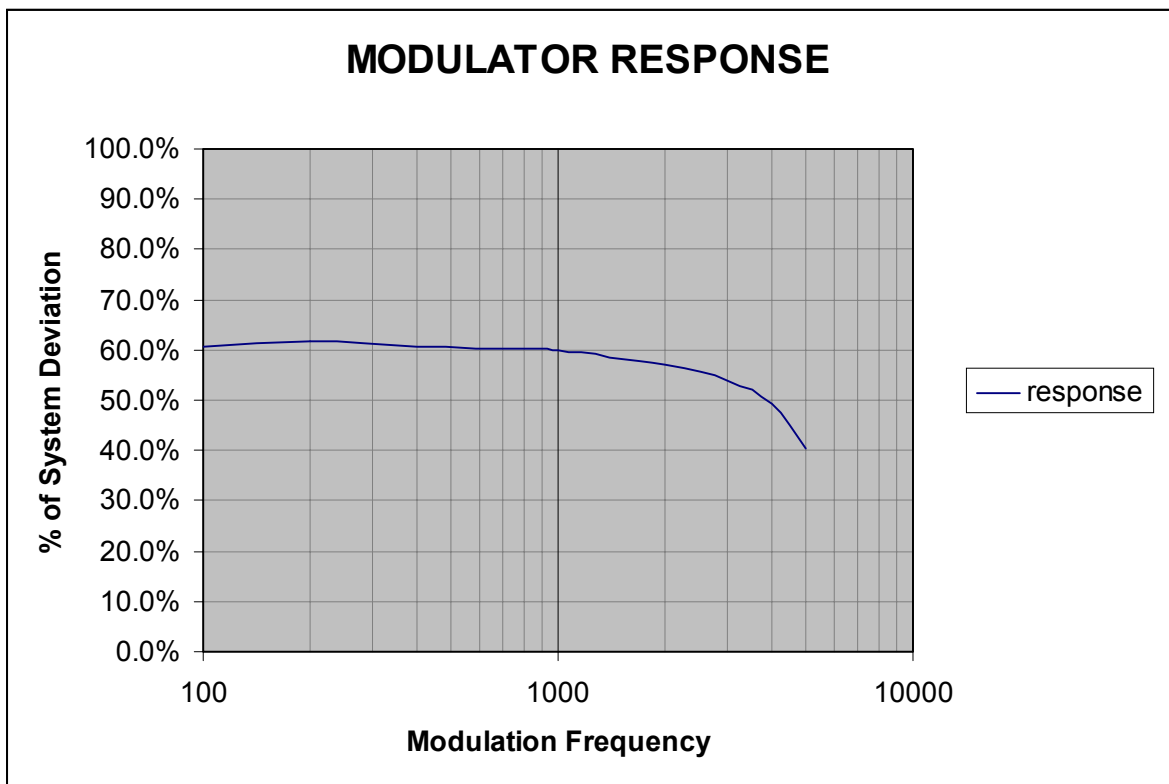

**TYPE OF TEST:** SPEECH AMPLIFIER LOW-PASS FILTER RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**PROCEDURE:**

1. The stages of the PBS-446D speech amplifier prior to the low-pass filter were removed by disconnecting R378 from the output of limiting amplifier U303B.
2. The output of a BK Precision Model 4010 Function Generator was applied to R378.
3. A Fluke Model 45 Dual Display Multimeter was used to measure the low-pass filter output at Pin 14 of U303D.
4. The audio signal generator was set for a 1000 Hz sine wave at an output level of 2.5 VP to produce -1.3 dB at the output of the low-pass filter. This level was selected to prevent limiting or distortion at any frequency. The Fluke Model 45 Dual Display Multimeter was set to make all measurements relative to this reference level.
5. The frequency of the audio signal generator was varied from 100 to 100 kHz with the output level constant. Measurements were recorded on the accompanying chart. All measurements were +/- relative to the -1.3 dB measured at 1000 Hz.

**TYPE OF TEST:** SPEECH AMPLIFIER LOW-PASS FILTER RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**TEST RESULTS:**

Input Voltage required for -1.34 dB output at 1000 Hz: 2.5 VP

| Frequency<br>(Hz) | Measured<br>Amplitude<br>(dB) | Relative<br>Amplitude<br>(dB) |
|-------------------|-------------------------------|-------------------------------|
| 100               | -2.24                         | -0.90                         |
| 200               | -2.21                         | -0.87                         |
| 300               | -2.16                         | -0.82                         |
| 400               | -2.09                         | -0.75                         |
| 500               | -2.02                         | -0.68                         |
| 600               | -1.92                         | -0.58                         |
| 800               | -1.67                         | -0.33                         |
| 1,000             | -1.34                         | 0.00                          |
| 2,000             | -0.04                         | 1.30                          |
| 3,000             | -4.77                         | -3.43                         |
| 4,000             | -11.22                        | -9.88                         |
| 5,000             | -16.54                        | -15.20                        |
| 6,000             | -21.02                        | -19.68                        |
| 8,000             | -28.43                        | -27.09                        |
| 10,000            | -34.55                        | -33.21                        |
| 12,000            | -39.81                        | -38.47                        |
| 16,000            | -48.44                        | -47.10                        |
| 20,000            | -55.10                        | -53.76                        |
| 24,000            | -60.00                        | -58.66                        |
| 40,000            | -72.00                        | -70.66                        |
| 80,000            | -72.00                        | -70.66                        |
| 100,000           | -72.00                        | -70.66                        |

Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** SPEECH AMPLIFIER LOW-PASS FILTER RESPONSE

**FCC PART:** 2.1047 (a)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032


**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**CURVE:**

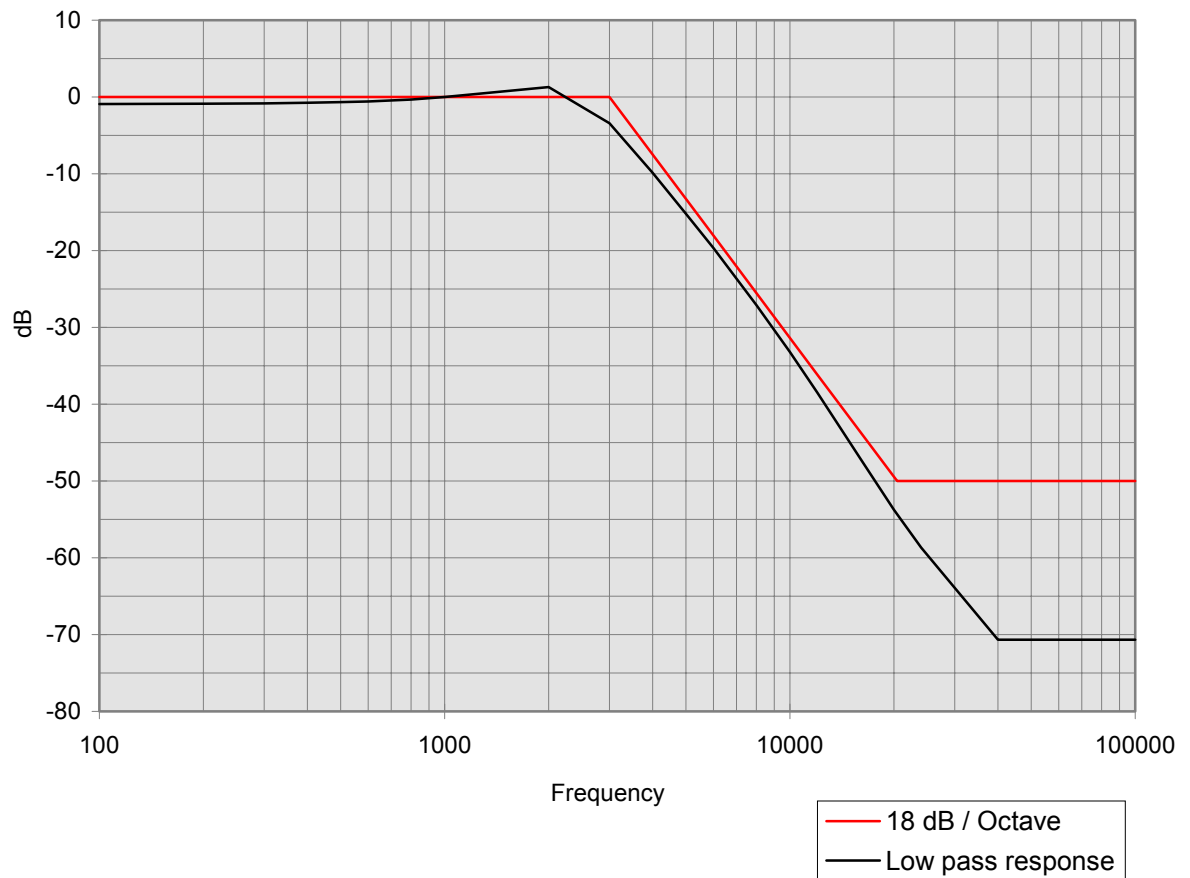

**TYPE OF TEST:** PERCENT MODULATION VS. MODULATION INPUT VOLTAGE

**FCC PART:** 2.1047 (b)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) per the tune-up procedure outlined in the Preliminary Maintenance Manual.
2. The PBS-446D was connected at antenna terminal J201 to the RF input of an IFR COM-120B Communications Test Set used to measure FM deviation.
3. The output of a BK Precision Model 4010 Function Generator was applied to the microphone input of the PBS-446D through J301. The output of the audio generator was set to an output level of 1.5 VP, a level sufficient to drive the audio circuit into limiting at any frequency.
4. A Fluke Model 45 Dual Display Multimeter was used to measure the amplitude of the signal applied to the microphone input.
5. The frequency of the audio generator was adjusted to find the frequency of maximum response. The PBS-446D was set for 12.5 kHz bandwidth operation and the deviation was adjusted for +/- 2.5 kHz as outlined in the Preliminary Maintenance Manual.
6. The frequency of the audio signal generator was set to 300 Hz and the output level was adjusted to produce 250 Hz deviation, which is 10% of the rated modulation. The voltage level was then adjusted for 20% of the rated modulation, and repeated for every 10% increment.
7. The input voltage was adjusted to a level 16 dB greater than required to produce 50% modulation. The maximum deviation was noted, along with the level required to achieve it, if 100% modulation was not realized.
8. Steps 6 and 7 were repeated for frequencies of 500, 750, 1000, 2000 and 3000 Hz.
9. The PBS-446D was set for 25 kHz bandwidth operation and the deviation was adjusted for +/- 5 kHz as outlined in the Preliminary Maintenance Manual.
10. Steps 6, 7 and 8 were repeated for 25 kHz bandwidth operation.
11. Results were plotted on separate graphs for 12.5 kHz and 25 kHz bandwidth operation.

**TYPE OF TEST:** PERCENT MODULATION VS. MODULATION INPUT VOLTAGE

**FCC PART:** 2.1047 (b)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**TEST RESULTS:**

| Percent Modulation | Deviation (kHz) | Input level (mVRMS) - <b>12.5 kHz Bandwidth</b> |        |        |         |         |         |
|--------------------|-----------------|-------------------------------------------------|--------|--------|---------|---------|---------|
|                    |                 | 300 Hz                                          | 500 Hz | 750 Hz | 1000 Hz | 2000 Hz | 3000 Hz |
| 10%                | 0.25            | 37.0                                            | 8.7    | 5.2    | 3.8     | 2.5     | 4.4     |
| 20%                | 0.50            | 82.3                                            | 20.0   | 11.5   | 8.7     | 5.9     | 10.2    |
| 30%                | 0.75            | 126.9                                           | 31.3   | 17.9   | 13.6    | 9.3     | 16.5    |
| 40%                | 1.00            | 171.5                                           | 41.9   | 24.2   | 18.6    | 12.3    | 22.1    |
| 50%                | 1.25            | 215.9                                           | 53.2   | 30.6   | 23.5    | 15.7    | 33.4    |
| 60%                | 1.50            | 258.6                                           | 64.5   | 36.9   | 27.8    | 19.2    | 92.0*   |
| 70%                | 1.75            | 493.6                                           | 97.8   | 45.4   | 33.4    | 22.7    |         |
| 80%                | 2.00            | 750.0                                           | 157.9  | 70.1   | 47.5    | 26.2    |         |
| 90%                | 2.25            | 1641.4                                          | 507.4  | 176.9  | 176.8   | 38.8    |         |
| 100%               | 2.50            |                                                 |        | 315.1* |         | 80.3*   |         |
| Level at 50%       | +16 dB          | 1362.8                                          | 335.7  | 193.1  | 148.3   | 99.1    | 210.8   |
| Max Deviation      | (kHz)           | 2.25                                            | 2.25   | 2.30*  | 2.25    | 2.40*   | 1.40*   |

| Percent Modulation | Deviation (kHz) | Input level (mVRMS) - <b>25 kHz Bandwidth</b> |        |        |         |         |         |
|--------------------|-----------------|-----------------------------------------------|--------|--------|---------|---------|---------|
|                    |                 | 300 Hz                                        | 500 Hz | 750 Hz | 1000 Hz | 2000 Hz | 3000 Hz |
| 10%                | 0.50            | 38.4                                          | 9.4    | 5.9    | 4.4     | 3.1     | 5.1     |
| 20%                | 1.00            | 81.5                                          | 20.0   | 11.5   | 8.7     | 5.9     | 10.2    |
| 30%                | 1.50            | 124.1                                         | 30.6   | 17.8   | 13.6    | 9.3     | 15.7    |
| 40%                | 2.00            | 164.4                                         | 41.2   | 23.5   | 17.9    | 12.2    | 22.1    |
| 50%                | 2.50            | 208.7                                         | 51.1   | 29.8   | 22.8    | 15.7    | 30.5    |
| 60%                | 3.00            | 251.4                                         | 62.4   | 35.5   | 27.1    | 19.2    | 72.9*   |
| 70%                | 3.50            | 337.2                                         | 77.2   | 42.6   | 32.0    | 22.7    |         |
| 80%                | 4.00            | 678.8                                         | 145.2  | 65.9   | 44.0    | 26.9    |         |
| 90%                | 4.50            | 1584.7                                        | 464.6  | 169.8  | 162.7   | 41.0    |         |
| 100%               | 5.00            |                                               |        | 372.2* |         | 79.6*   |         |
| Level at 50%       | + 16 dB         | 1316.9                                        | 322.4  | 188.0  | 143.9   | 99.1    | 192.5   |
| Max Deviation      | (kHz)           | 4.50                                          | 4.50   | 4.60*  | 4.50    | 4.70*   | 2.80*   |

Certifying Engineer:

*Michael A. Pickard*

Michael A. Pickard - Project Engineer

**TYPE OF TEST:** PERCENT MODULATION VS. MODULATION INPUT VOLTAGE

**FCC PART:** 2.1047 (b)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032


**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**CURVE:**

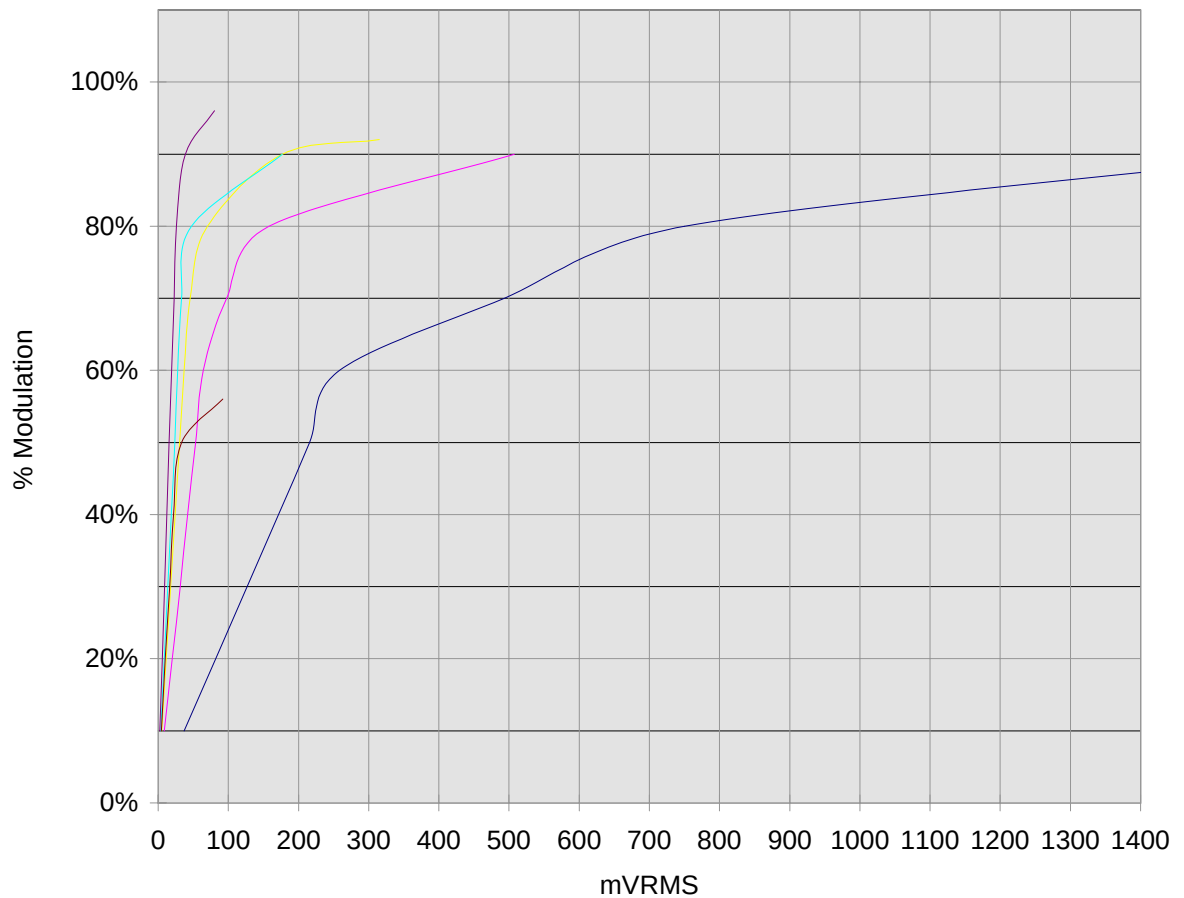

Channel Bandwidth: 12.5 kHz  
100% Modulation: 2.5 kHz

— 300 Hz — 500 Hz — 750 Hz  
— 1000 Hz — 2000 Hz — 3000 Hz

**TYPE OF TEST:** PERCENT MODULATION VS. MODULATION INPUT VOLTAGE

**FCC PART:** 2.1047 (b)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032


**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 11, 2002

**CURVE:**

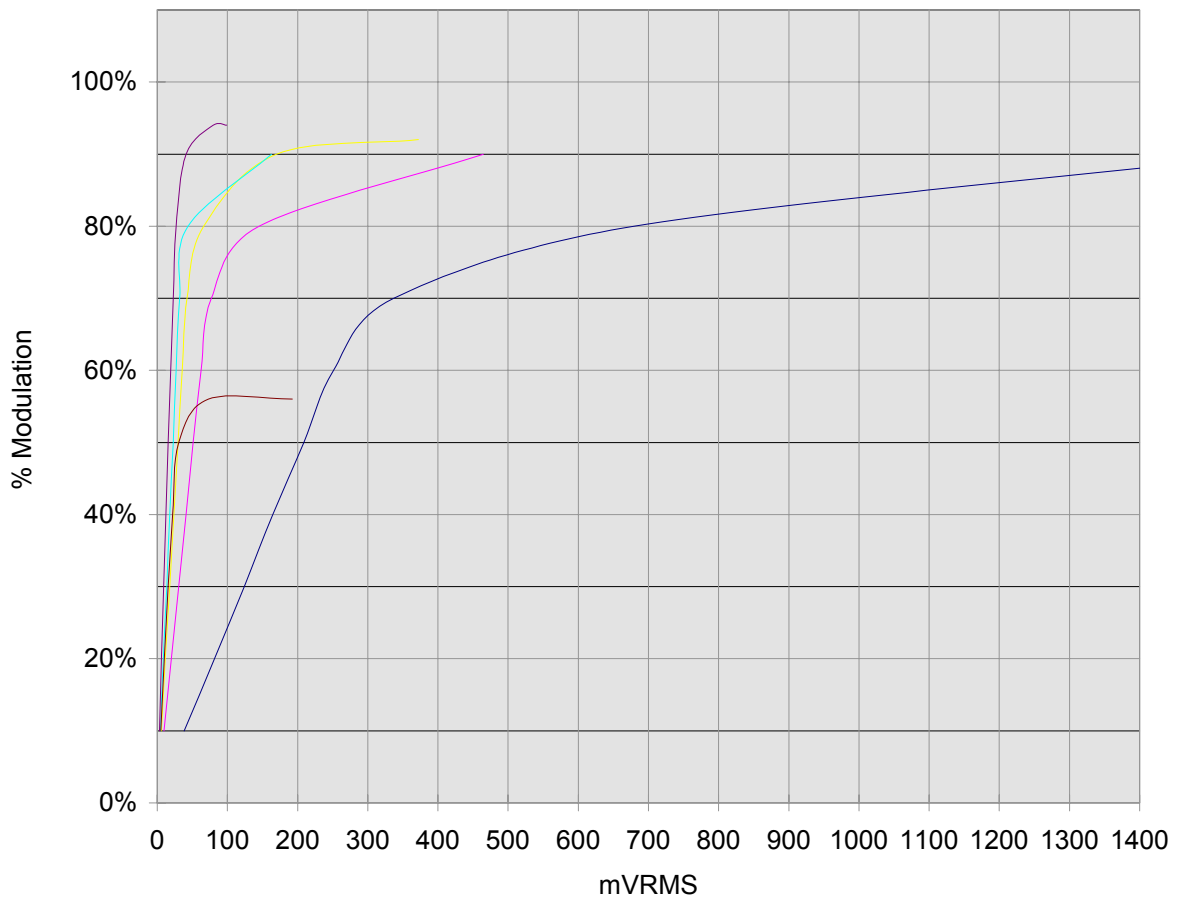

Channel Bandwidth: 25.0 kHz  
100% Modulation: 5.0 kHz

— 300 Hz — 500 Hz — 750 Hz  
— 1000 Hz — 2000 Hz — 3000 Hz

**TYPE OF TEST:** OCCUPIED BANDWIDTH

**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 5, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) at full rated power, was set for 12.5 kHz bandwidth operation, and the deviation was adjusted for +/- 2.5 kHz as outlined in the Preliminary Maintenance Manual.
2. The RF output of the PBS-446D was measured with a Bird Model 6154 Thermaline Wattmeter. This value was recorded as POWER OUTPUT. Power was supplied to the PBS-446D by the RPS-1A wall-mounted power supply provided with each unit. The transmitter supply voltage was set at +8.25 VDC to produce the maximum rated transmitter power output.
3. The antenna terminal J201 was connected to the input of a Bird Model 8306-300-N 30 DB power attenuator. The output of the attenuator was connected to the input of a Hewlett Packard Model 8560E Spectrum Analyzer. The spectrum analyzer was set to:
  - 100 Hz Resolution Bandwidth
  - 100 Hz Video Bandwidth
  - 5 kHz per Horizontal Division
  - 10 dB per Vertical Division
4. The center frequency of the spectrum analyzer was set to the PBS-446D carrier frequency and the full scale reference line was set to the level of the unmodulated carrier.
5. The output of a BK Precision Model 4010 Function Generator was applied to the microphone input of the PBS-446D through J301. The frequency of the audio signal generator was set to 2500 Hz and the output adjusted to a level 16 dB greater than that necessary to produce 50% of the rated system deviation at the frequency of maximum response.
6. The spectrum analyzer readings of the sideband levels in dBm were recorded and the spectrum analyzer output was plotted with FCC limits.
7. The PBS-446D was set for 25 kHz bandwidth operation, and the deviation was adjusted for +/- 5 kHz as outlined in the Preliminary Maintenance Manual. Steps 3 - 6 were repeated for 25 kHz bandwidth operation.

**TYPE OF TEST:** OCCUPIED BANDWIDTH  
**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)  
**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 5, 2002

**EQUATIONS:**

The analyzer readings in dBm were converted to power using the following formula:

$$\text{Power} = .001 (\text{antilog } F(\text{dBm}, 10) )$$

The power readings were summed to provide a reference power level. The total was converted back to dBm with the following formula and recorded as MEAN REFERENCE POWER OUTPUT:

$$\text{dBm} = 10 (\log F_c (\text{Power}, .001))$$

The sideband powers on each side of the carrier were reduced to a percentage of the MEAN REFERENCE POWER OUTPUT. The percentages were added together starting with the carrier and expanding out equally in +/- 2.5 KHz increments until greater than 99.5% of the total MEAN REFERENCE POWER was reached.

The occupied bandwidth is defined as having 99.5% of the total MEAN REFERENCE POWER existing within its limits.


The following chart shows that 99.9% of the power is contained within  $\pm 5.5$  kHz of the carrier for narrowband operation. The occupied bandwidth is therefore 11 kHz. The necessary bandwidth as determined by Carson's rule is:

|                                                  |   |                                        |      |
|--------------------------------------------------|---|----------------------------------------|------|
| Maximum modulation frequency (M) in kHz          | = | 3                                      |      |
| Maximum deviation (D) in kHz                     | = | 2.5                                    |      |
| Constant K                                       | = | 1                                      |      |
| Necessary bandwidth for <b>narrowband</b> in kHz | = | $(2 \times M) + (2 \times D \times K)$ | = 11 |

An additional chart shows that 99.9% of the power is contained within  $\pm 8$  kHz of the carrier for wideband operation. The occupied bandwidth is therefore 16 kHz. The necessary bandwidth as determined by Carson's rule is:

|                                                |   |                                        |      |
|------------------------------------------------|---|----------------------------------------|------|
| Maximum modulation frequency (M) in kHz        | = | 3                                      |      |
| Maximum deviation (D) in kHz                   | = | 5                                      |      |
| Constant K                                     | = | 1                                      |      |
| Necessary bandwidth for <b>wideband</b> in kHz | = | $(2 \times M) + (2 \times D \times K)$ | = 16 |


Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** OCCUPIED BANDWIDTH  
**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)  
**MANUFACTURER:** RITRON, INC.  
 505 West Carmel Drive  
 Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 5, 2002  
**DATA:** Carrier Frequency: 460.05 MHz  
 Power Output: 2.50 Watts  
 Attenuation: 30.00 dB  
 Reference Power: 3.70 dBm  
 Mean Reference Power: 34.04 dBm  
 Channel Bandwidth: 12.5 kHz  
 Occupied Bandwidth: 10.0 kHz


| Emission Frequency Offset (kHz) | Measured Amplitude (dBm) | Relative Amplitude (dBm) | FCC Limit (dBm) | Power (Watts) | Percent MRP (%) | Occupied Bandwidth (%) |
|---------------------------------|--------------------------|--------------------------|-----------------|---------------|-----------------|------------------------|
| -25.0                           | -82.13                   | -85.83                   | -53.98          | 6.1E-9        | 0.00%           | 99.98%                 |
| -22.5                           | -79.80                   | -83.50                   | -53.98          | 10.5E-9       | 0.00%           |                        |
| -20.0                           | -86.30                   | -90.00                   | -53.98          | 2.3E-9        | 0.00%           |                        |
| -17.5                           | -76.47                   | -80.17                   | -53.98          | 22.5E-9       | 0.00%           |                        |
| -15.0                           | -77.30                   | -81.00                   | -53.98          | 18.6E-9       | 0.00%           |                        |
| -12.5                           | -67.80                   | -71.50                   | -69.94          | 166.0E-9      | 0.00%           |                        |
| -10.0                           | -51.80                   | -55.50                   | -51.76          | 6.6E-6        | 0.00%           |                        |
| -7.5                            | -35.13                   | -38.83                   | -33.59          | 306.9E-6      | 0.01%           |                        |
| -5.0                            | -18.97                   | -22.67                   | 0.00            | 12.7E-3       | 0.50%           |                        |
| -2.5                            | -4.80                    | -8.50                    | 0.00            | 331.1E-3      | 13.05%          |                        |
| 0.0                             | 2.70                     | -1.00                    | 0.00            | 1.9E+0        | 73.41%          |                        |
| 2.5                             | -4.97                    | -8.67                    | 0.00            | 318.4E-3      | 12.55%          |                        |
| 5.0                             | -19.30                   | -23.00                   | 0.00            | 11.7E-3       | 0.46%           |                        |
| 7.5                             | -36.30                   | -40.00                   | -33.59          | 234.4E-6      | 0.01%           |                        |
| 10.0                            | -53.63                   | -57.33                   | -51.76          | 4.3E-6        | 0.00%           |                        |
| 12.5                            | -70.47                   | -74.17                   | -69.94          | 89.7E-9       | 0.00%           |                        |
| 15.0                            | -74.47                   | -78.17                   | -53.98          | 35.7E-9       | 0.00%           |                        |
| 17.5                            | -75.63                   | -79.33                   | -53.98          | 27.4E-9       | 0.00%           |                        |
| 20.0                            | -81.30                   | -85.00                   | -53.98          | 7.4E-9        | 0.00%           |                        |
| 22.5                            | -76.13                   | -79.83                   | -53.98          | 24.4E-9       | 0.00%           |                        |
| 25.0                            | -84.63                   | -88.33                   | -53.98          | 109.6E-6      | 0.00%           |                        |

Certifying Engineer:

  
 Michael A. Pickard - Project Engineer

**TYPE OF TEST:** OCCUPIED BANDWIDTH  
**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)  
**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 5, 2002

**CURVE:**

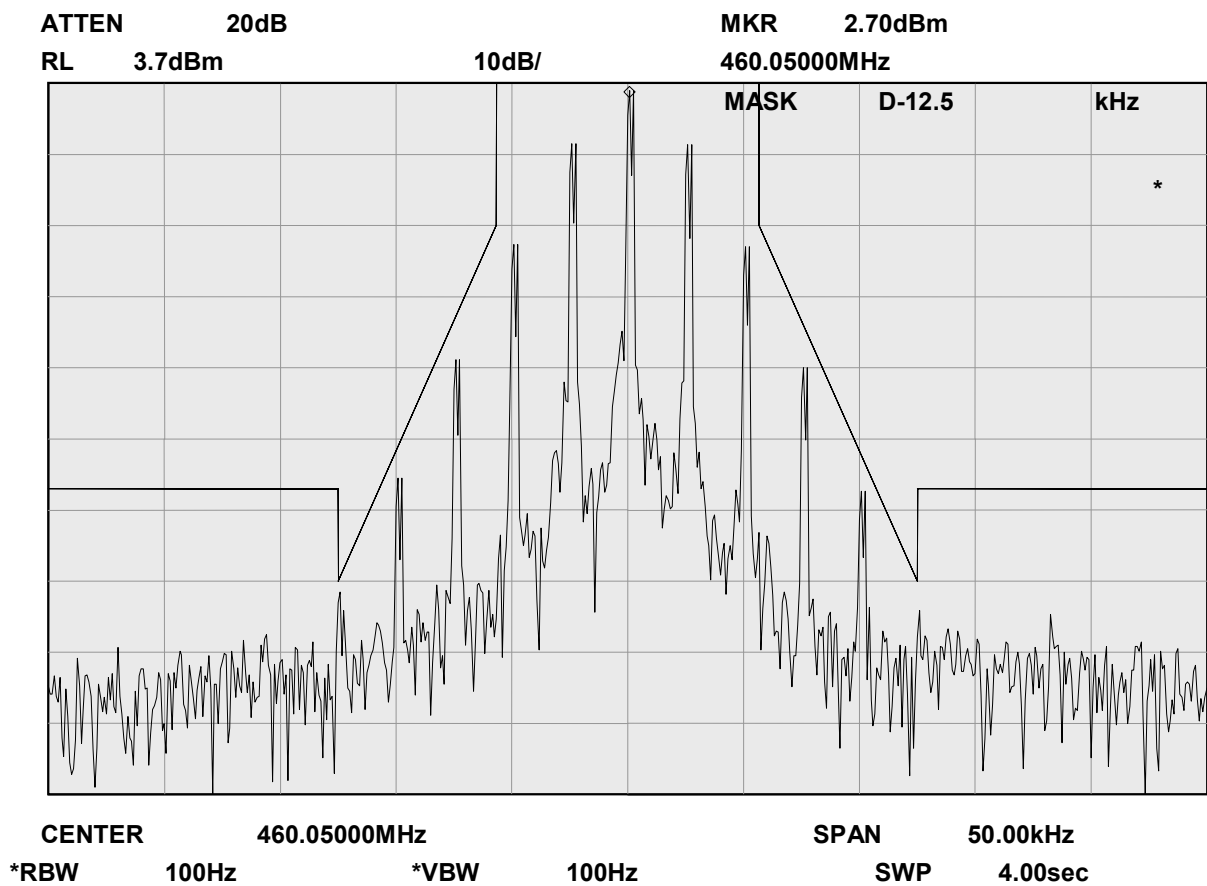


**TYPE OF TEST:** OCCUPIED BANDWIDTH  
**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)  
**MANUFACTURER:** RITRON, INC.  
 505 West Carmel Drive  
 Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 5, 2002  
**DATA:** Carrier Frequency: 460.05 MHz  
 Power Output: 2.50 Watts  
 Attenuation: 30.00 dB  
 Reference Power: 3.70 dBm  
 Mean Reference Power: 33.79 dBm  
 Channel Bandwidth: 25.0 kHz  
 Occupied Bandwidth: 15.0 kHz

| Emission Frequency Offset (KHz) | Measured Amplitude (dBm) | Relative Amplitude (dBm) | FCC Limit (dBm) | Power (Watts) | Percent MRP (%) | Occupied Bandwidth (%) |
|---------------------------------|--------------------------|--------------------------|-----------------|---------------|-----------------|------------------------|
| -25.0                           | -83.63                   | -87.33                   | -35.00          | 4.3E-9        | 0.00%           | 99.92%                 |
| -22.5                           | -77.80                   | -81.50                   | -35.00          | 16.6E-9       | 0.00%           |                        |
| -20.0                           | -77.30                   | -81.00                   | -25.00          | 18.6E-9       | 0.00%           |                        |
| -17.5                           | -74.30                   | -78.00                   | -25.00          | 37.2E-9       | 0.00%           |                        |
| -15.0                           | -58.47                   | -62.17                   | -25.00          | 1.4E-6        | 0.00%           |                        |
| -12.5                           | -42.97                   | -46.67                   | -25.00          | 50.5E-6       | 0.00%           |                        |
| -10.0                           | -29.47                   | -33.17                   | 0.00            | 1.1E-3        | 0.05%           |                        |
| -7.5                            | -17.30                   | -21.00                   | 0.00            | 18.6E-3       | 0.78%           | 99.92%                 |
| -5.0                            | -7.13                    | -10.83                   | 0.00            | 193.6E-3      | 8.09%           |                        |
| -2.5                            | -0.97                    | -4.67                    | 0.00            | 799.8E-3      | 33.40%          |                        |
| 0.0                             | -4.13                    | -7.83                    | 0.00            | 386.4E-3      | 16.13%          |                        |
| 2.5                             | -0.97                    | -4.67                    | 0.00            | 799.8E-3      | 33.40%          |                        |
| 5.0                             | -7.47                    | -11.17                   | 0.00            | 179.1E-3      | 7.48%           |                        |
| 7.5                             | -18.13                   | -21.83                   | 0.00            | 15.4E-3       | 0.64%           | 99.92%                 |
| 10.0                            | -31.13                   | -34.83                   | 0.00            | 770.9E-6      | 0.03%           |                        |
| 12.5                            | -45.80                   | -49.50                   | -25.00          | 26.3E-6       | 0.00%           |                        |
| 15.0                            | -59.47                   | -63.17                   | -25.00          | 1.1E-6        | 0.00%           |                        |
| 17.5                            | -77.80                   | -81.50                   | -25.00          | 16.6E-9       | 0.00%           |                        |
| 20.0                            | -80.47                   | -84.17                   | -25.00          | 9.0E-9        | 0.00%           |                        |
| 22.5                            | -77.30                   | -81.00                   | -35.00          | 18.6E-9       | 0.00%           |                        |
| 25.0                            | -82.13                   | -85.83                   | -35.00          | 6.1E-9        | 0.00%           |                        |

Certifying Engineer:   
 Michael A. Pickard - Project Engineer

**TYPE OF TEST:** OCCUPIED BANDWIDTH  
**FCC PART:** 2.1049 (c)(1) per 90.210 (b)(d)  
**MANUFACTURER:** RITRON, INC.  
 505 West Carmel Drive  
 Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 5, 2002

**CURVE:**

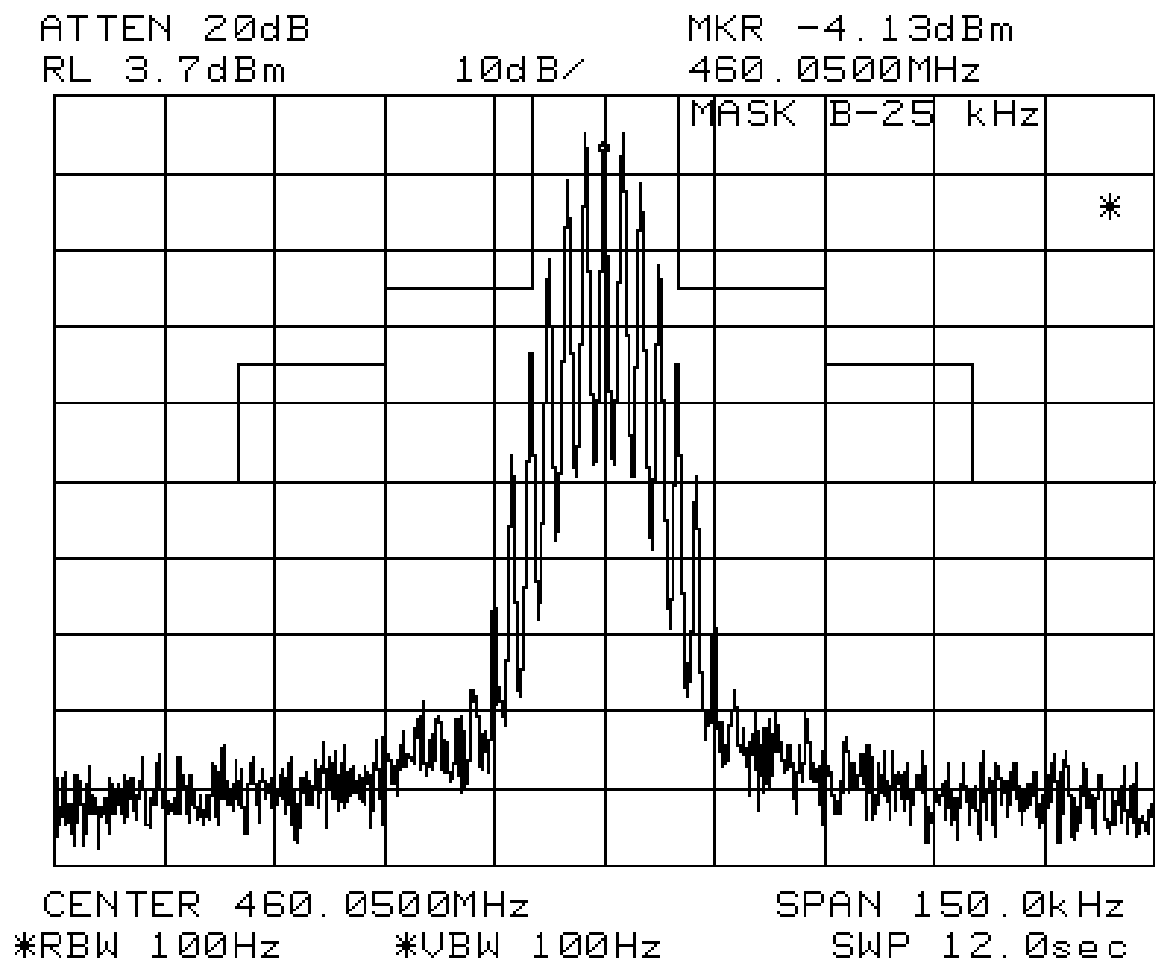

**TYPE OF TEST:** SPURIOUS EMISSIONS AT ANTENNA TERMINALS

**FCC PART:** 2.1051

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 7, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual.
2. Power was supplied to the PBS-446D by the RPS-1A wall-mounted power supply provided with each unit. The transmitter supply voltage was set at +8.25 VDC to produce the maximum rated transmitter power output.
3. The transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation as specified in FCC Part 2.1049 (c)(1).
4. The PBS-446D antenna terminal P201 was connected to the input of a Bird Model 8306-300-N, 30 dB power attenuator. The output of the attenuator was connected to the input of a Hewlett-Packard Model 8560E Spectrum Analyzer.
5. The spectrum was searched from 8 MHz to the 10th harmonic of the operating frequency. All unreported emissions were more than 20 dB below the FCC limit of  $50 + 10 \log P$ , or -20 dBm.
6. The measured insertion loss of the attenuator and cables are listed as the "Correction Factor" on the data sheet.
7. Resultant Amplitude = Measured Amplitude + Correction Factor

**TYPE OF TEST:** SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
**FCC PART:** 2.1051  
**MANUFACTURER:** RITRON, INC.  
 505 West Carmel Drive  
 Carmel, IN 46032  
**MODEL:** PBS-446D  
**TYPE OF UNIT:** UHF-FM Base Transceiver  
**FCC ID:** AIERIT16-446  
**DATE:** November 7, 2002

**TEST RESULTS:**

Carrier Frequency (Fo): 460.050 MHz  
 Oscillator Frequency: 3.6 MHz  
 Output Power: 2.5 Watts  
 Transmitter Supply Voltage: 8.25 VDC  
 FCC Limit: -20 dBm

| Emmission Frequency (MHz) | Multiple of Carrier | Measured Amplitude (dBm) | Correction Factor (dB) | Resultant Amplitude (dBm) |
|---------------------------|---------------------|--------------------------|------------------------|---------------------------|
| 402.5500                  | $f_o - (f_o/8)$     | -79.5                    | 30                     | -49.5                     |
| 460.0500                  | $f_o$               | 3.7                      | 30                     | 33.7                      |
| 517.5500                  | $f_o + (f_o/8)$     | -82.3                    | 30                     | -52.3                     |
| 920.1000                  | $f_o * 2$           | -53.2                    | 30                     | -23.2                     |
| 1380.1500                 | $f_o * 3$           | -79.0                    | 30                     | -49.0                     |
| 1840.2000                 | $f_o * 4$           | -76.0                    | 30                     | -46.0                     |

Certifying Engineer:

*Michael A. Pickard*

Michael A. Pickard - Project Engineer

**TYPE OF EXHIBIT:** FIELD STRENGTH OF SPURIOUS RADIATION

**FCC PART:** 2.0153

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 8, 2002

**PROCEDURE:**

- 1, The measurements for effective radiated power and field strength of spurious radiation were taken at the RITRON, Inc. 3 meter test site using the substitution method. The measurements were made in accordance with FCC Rules & Regulations Part 2.947.
2. The PBS-446D was aligned for transmitter operation on 460.050 MHz at 2.5 Watts per the tune-up procedure outlined in the Preliminary Maintenance Manual. The unit was then terminated at the antenna port with the antenna sold with this product (Nearson AFB-1545). Power was supplied to the PBS-446D by the RPS-1A wall-mounted power supply provided with each unit.
3. All field strength measurements were made with the Hewlett-Packard Model 8560E Spectrum Analyzer and the appropriate antenna for the frequency being measured. The antennas used were:
  - Calibrated 1/2-wave dipole tuned to desired harmonic
  - Electro-Metrics LP-25 Log Periodic Antenna at 200 to 1000 MHz
4. A tuned dipole was substituted at the radio side of the range driven by a known power to produce a known ERP at each harmonic. The receiving antenna was oriented both vertically and horizontally and reference measurements were taken at each harmonic.
5. For each emission, the height and polarization of the field strength measurement antenna and orientation of the PBS-446D were varied to provide maximum field strength.
6. The spectrum was searched from 4 MHz to the 10th harmonic of the transmit frequency. All unreported emissions were more than 20 dB below the FCC limits specified in Part 90.210(d)(3).
7. ERP (dBm) = analyzer reading of emission (dBm) – 0dB substitution analyzer reading (dBm)

**TYPE OF EXHIBIT:** FIELD STRENGTH OF SPURIOUS RADIATION

**FCC PART:** 2.1053

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 8, 2002

**RESULTS:**

| Emmission Frequency (MHz) | Mult of Carrier | Reference Antenna | Analyzer Reading (dBm) | 0 dBm Substitution Reading (dBm) | ERP (dBm) | FCC Limit (dBm) |
|---------------------------|-----------------|-------------------|------------------------|----------------------------------|-----------|-----------------|
| 460.05                    | 1               | Vert Dipole       | 3                      | -30                              | 33        | None            |
| 920.10                    | 2               | Vert Dipole       | -77                    | -46                              | -31       | -20             |
| 1380.15                   | 3               | Vert Dipole       | -79                    | -53                              | -26       | -20             |
| 1840.20                   | 4               | Vert Dipole       | -97                    | -57                              | -40       | -20             |
| 2300.25                   | 5               | Vert Dipole       | -104                   | -61                              | -43       | -20             |
| 2760.30                   | 6               | Vert Dipole       | -100                   | -69                              | -31       | -20             |
| 460.05                    | 1               | Horz Dipole       | 7                      | -27                              | 34        | None            |
| 920.10                    | 2               | Horz Dipole       | -64                    | -43                              | -21       | -20             |
| 1380.15                   | 3               | Horz Dipole       | -74                    | -50                              | -24       | -20             |
| 1840.20                   | 4               | Horz Dipole       | -76                    | -52                              | -24       | -20             |
| 2300.25                   | 5               | Horz Dipole       | -93                    | -57                              | -36       | -20             |
| 2760.30                   | 6               | Horz Dipole       | -104                   | -80                              | -24       | -20             |

All other spurious emissions were at least 20 dB below the limit.

Certifying Engineer:

*Michael A. Pickard*

Michael A. Pickard - Project Engineer

**TYPE OF TEST:** FREQUENCY STABILITY VS. TEMPERATURE

**FCC PART:** 2.1055 (a)(1)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 15, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual.
2. Power was supplied to the PBS-446D by the RPS-1A wall-mounted power supply provided with each unit. The PBS-446D antenna terminal P201 was connected to the input of an IFR COM-120B RF communications test set, used to measure frequency of the carrier.
3. Temperature was measured with an Omega Model 7035-J-225 thermocouple connected directly to the case of Y302, a TCVCXO reference oscillator mounted on the PBS-446D printed circuit board.
4. The PBS-446D was enclosed in a plastic bag and placed into an Associated Laboratories Model ELH-0.5-LC environmental test chamber.
5. The temperature was raised to +50°C and allowed to stabilize for 30 minutes. The transmitter was activated and the frequency output recorded. The temperature was lowered in 10°C increments down to -30°C, allowing 30 minutes to stabilize at each temperature.
6. All measurements were converted to part-per-million (ppm) deviation and charted on a linear graph.

**TYPE OF TEST:** FREQUENCY STABILITY VS. TEMPERATURE

**FCC PART:** 2.1055 (a)(1)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446


**DATE:** November 15, 2003

**TEST RESULTS:**

Frequency: 460.050 MHz  
Nominal Temp: +25 °C  
FCC Limit: +/- 2.5 ppm

| Temperature<br>(°C) | Frequency<br>(MHz) | Deviation<br>(Hz) | Deviation<br>(ppm) |
|---------------------|--------------------|-------------------|--------------------|
| 50                  | 460.050210         | 210               | 0.46               |
| 40                  | 460.049700         | -300              | -0.65              |
| 30                  | 460.049750         | -250              | -0.54              |
| 20                  | 460.050170         | 170               | 0.37               |
| 10                  | 460.050370         | 370               | 0.80               |
| 0                   | 460.050350         | 350               | 0.76               |
| -10                 | 460.050160         | 160               | 0.35               |
| -20                 | 460.049810         | -190              | -0.41              |
| -30                 | 460.049700         | -300              | -0.65              |

Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** FREQUENCY STABILITY VS. TEMPERATURE

**FCC PART:** 2.1055 (a)(1)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032



**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 15, 2002

**CURVE:**

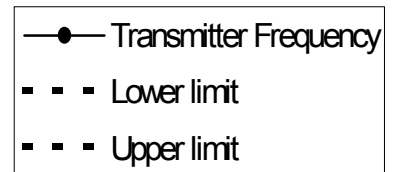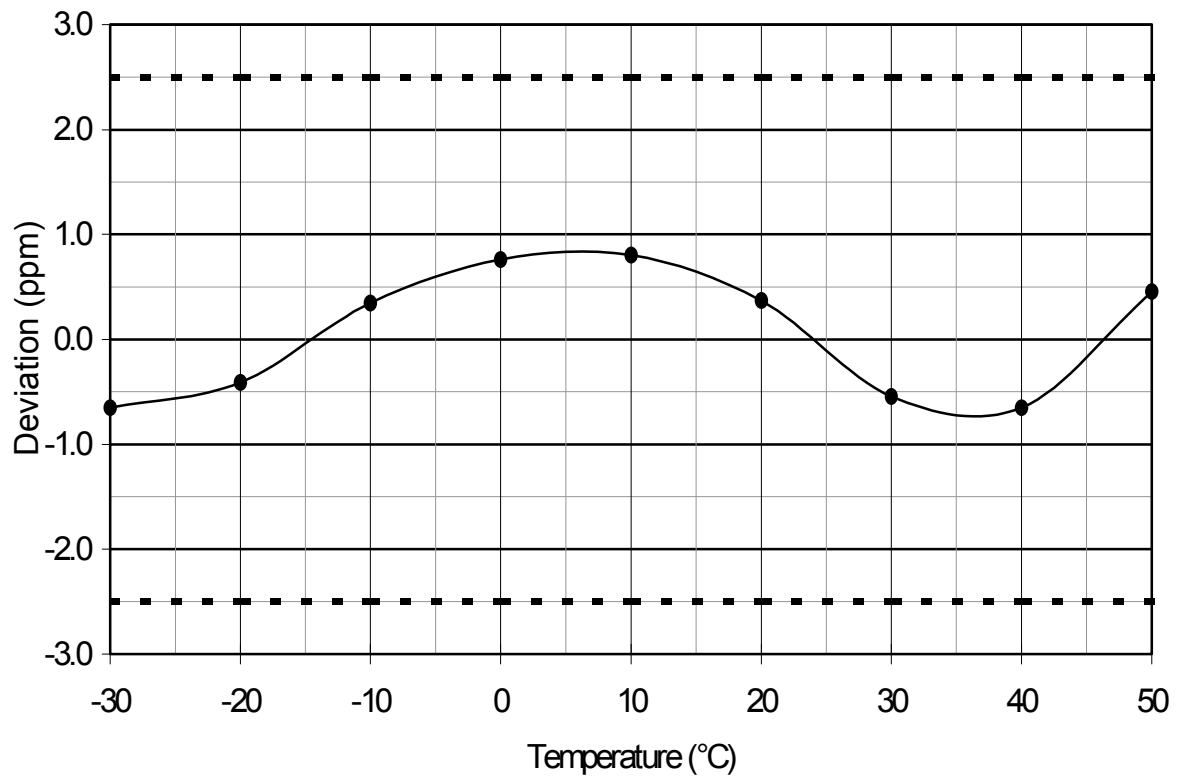

**TYPE OF TEST:** FREQUENCY STABILITY VS. BATTERY VOLTAGE

**FCC PART:** 2.1055 (d)(1)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 18, 2002

**PROCEDURE:**

1. The PBS-446D was aligned for transmitter operation on 460.050 MHz (Fo) at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual.
2. Power was supplied to the PBS-446D by a BK Precision Model 1630 power supply, and supply voltage was measured at P302 battery connector with a Micronta Model 22-191 Digital Multimeter.
3. The PBS-446D antenna terminal P201 was connected to the input of an IFR COM-120B RF communications test set, used to measure frequency of the carrier.
4. Frequency measurements were made at +25°C with supply voltage set as follows:

|                                   |          |
|-----------------------------------|----------|
| Minimum operating voltage         | 10.0 VDC |
| 85% of nominal operating voltage  | 11.9 VDC |
| Nominal operating voltage         | 14.0 VDC |
| 115% of nominal operating voltage | 16.1 VDC |
| Maximum operating voltage         | 18.0 VDC |

NOTE: The PBS-446D is normally powered by a RPS-1A wall-mounted power supply with a nominal voltage of 14.0 VDC in transmit.

5. All frequencies were referenced to the measurement made at 14.0 VDC, the nominal supply voltage.

**TYPE OF TEST:** FREQUENCY STABILITY VS. BATTERY VOLTAGE

**FCC PART:** 2.1055 (d)(2)

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 18, 2002

**TEST RESULTS:**

Carrier Frequency: 460.050 MHz

| Supply Voltage (VDC) | Supply Condition | Transmitter Frequency (MHz) | Deviation (Hz) | Deviation (ppm) |
|----------------------|------------------|-----------------------------|----------------|-----------------|
| 10.0                 | Minimum          | 465.049960                  | +20            | +0.04           |
| 11.9                 | 85% Nominal      | 465.049950                  | +10            | +0.02           |
| 14.0                 | Nominal          | 465.049940                  | 0              | 0.00            |
| 16.1                 | 115% Nominal     | 465.049940                  | 0              | 0.00            |
| 18.0                 | Maximum          | 465.049930                  | -10            | -0.02           |

Certifying Engineer:

  
Michael A. Pickard - Project Engineer

**TYPE OF TEST:** TRANSIENT FREQUENCY BEHAVIOR

**FCC PART:** 90.214

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver


**FCC ID:** AIERIT16-446

**DATE:** November 19, 2002

**PROCEDURE:**

The PBS-446D was aligned for transmitter operation on 460.050 at full rated power per the tune-up procedure outlined in the Preliminary Maintenance Manual. The tests were conducted per EIA-603 Part 2.2.19 as follows:

1. The test equipment was connected per the following diagram:

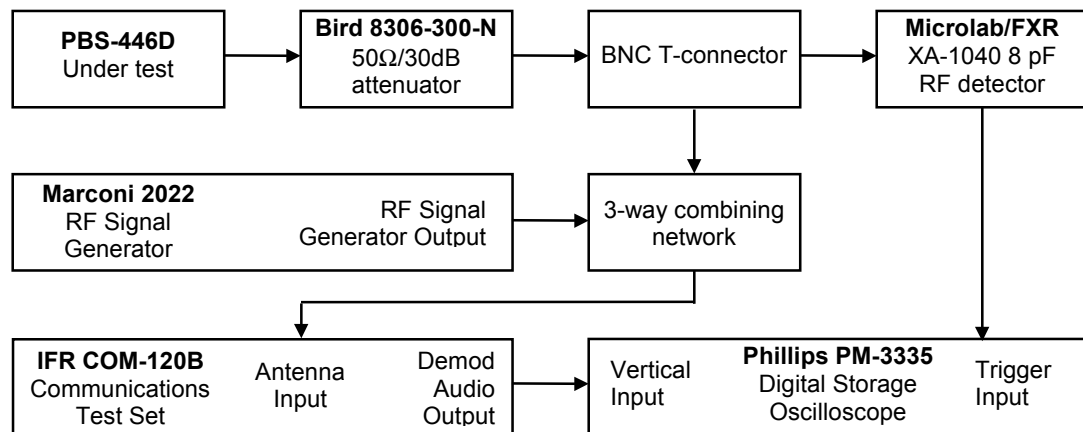

2. The IFR COM-120B receiver was set to measure FM deviation with the audio bandwidth set at  $\leq 20$  Hz to 15 kHz and the RF frequency set to 460.050 MHz.
3. The PBS-446D transmitter under test was turned on and the IFR COM-120B Spectrum Analyzer was used to measure the RF power level through the test network.
4. The PBS-446D transmitter was turned off.
5. The Marconi Model 2022 RF signal generator was set to 460.050 MHz at an RF level 20 dB below that measured in step 3, modulated with a 1 kHz tone at  $\pm 12.5$  kHz deviation.
6. The Phillips PM-3335 digital oscilloscope's horizontal sweep rate was set to 10 mS per division. The vertical amplitude control was adjusted to display the 1000 Hz demodulated audio from the signal generator at  $\pm 4$  divisions, vertically centered on the screen.

7. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the left side of the display when the RF detector senses RF power from the PBS-446D transmitter.
8. The attenuation of the RF attenuator was reduced so the input of the RF detector and the RF combiner is increased by 30 dB when the PBS-446D transmitter is turned on.
9. The PBS-446D transmitter is turned on and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603 Part 3.2.19.2. The resulting plot is labeled "switch on condition" and shows compliance with FCC Part 90.214.
10. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the right side of the display when the RF detector senses loss of RF power from the PBS-446D transmitter.
11. The PBS-446D transmitter is turned off and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603 Part 3.2.19.2. The resulting plot is labeled "switch off condition" and shows compliance with FCC Part 90.214.

Certifying Engineer:



Michael A. Pickard - Project Engineer

**TYPE OF TEST:** TRANSIENT FREQUENCY BEHAVIOR

**FCC PART:** 90.214

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032


**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 19, 2002

**SWITCH ON CONDITION  $t_{on}$ ,  $t_1$ , and  $t_2$**

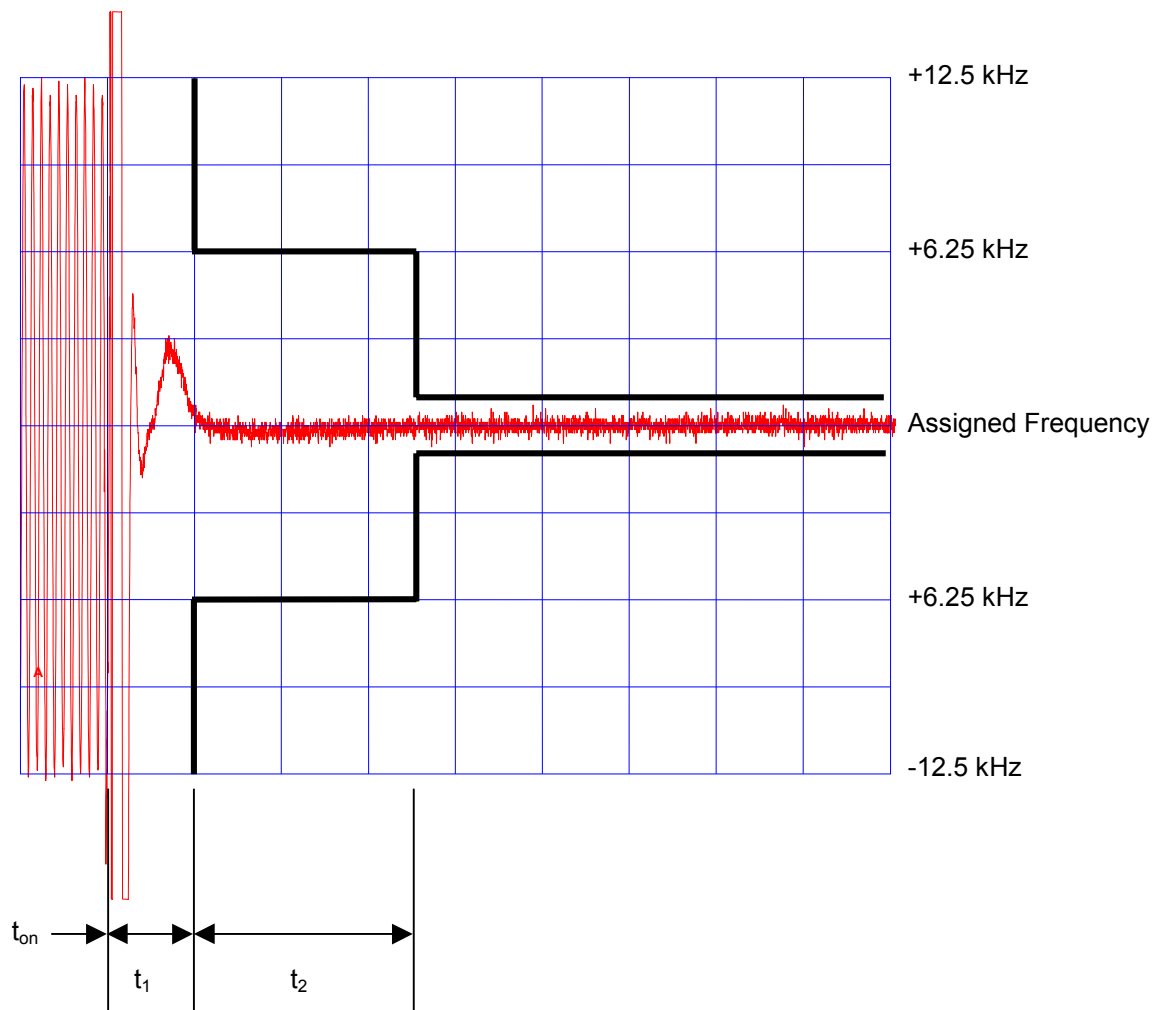

**TYPE OF TEST:** TRANSIENT FREQUENCY BEHAVIOR

**FCC PART:** 90.214

**MANUFACTURER:** RITRON, INC.  
505 West Carmel Drive  
Carmel, IN 46032

**MODEL:** PBS-446D

**TYPE OF UNIT:** UHF-FM Base Transceiver

**FCC ID:** AIERIT16-446

**DATE:** November 19, 2002

**SWITCH OFF CONDITION  $t_3$  and  $t_{OFF}$**

