
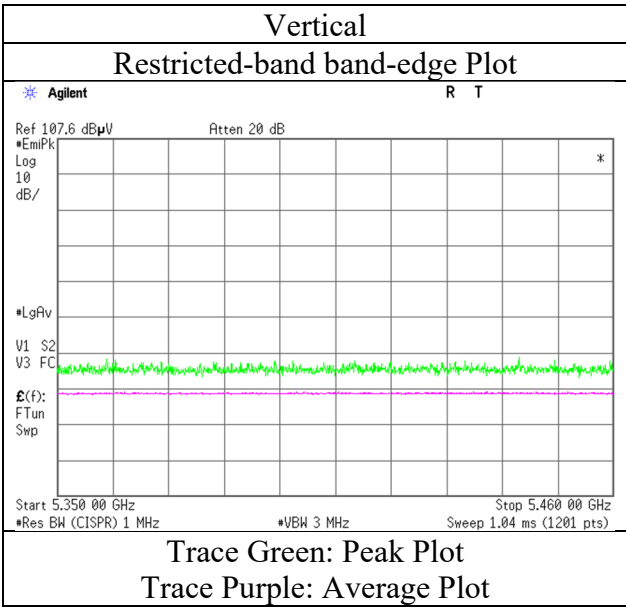


Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (26-tone RU)

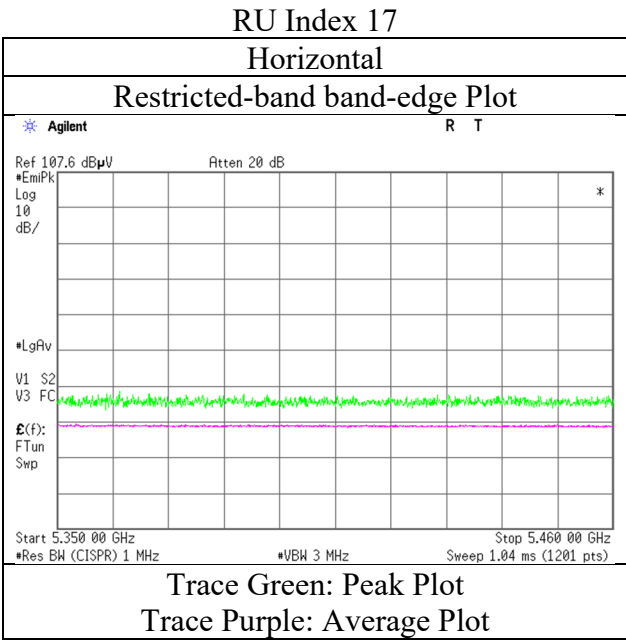

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (52-tone RU)

RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	43.2	34.1	31.7	6.2	31.6	0.3	49.4	40.7	73.9	53.9	24.5	13.3	*1)
Vert.	5350.0	43.0	33.9	31.7	6.2	31.6	0.3	49.3	40.4	73.9	53.9	24.6	13.5	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log(3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (52-tone RU)

RU Index 44

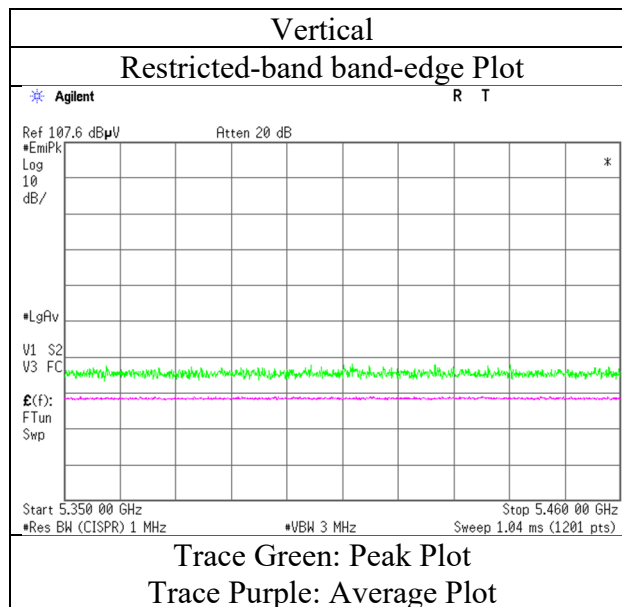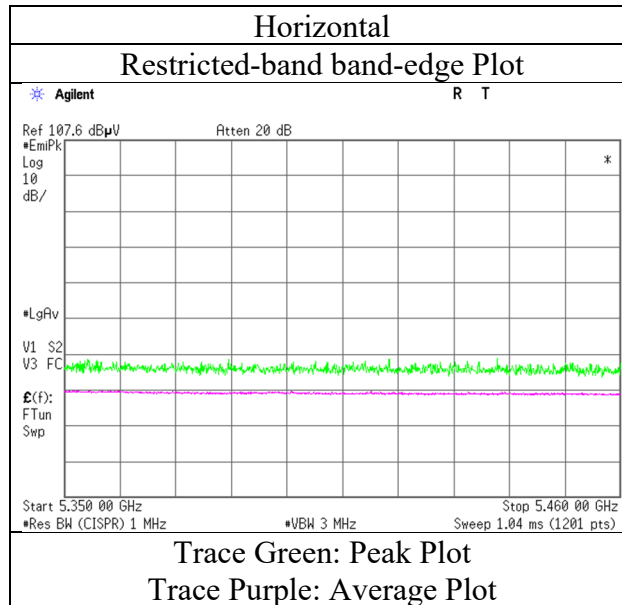

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (106-tone RU)

RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	46.7	36.3	31.7	6.2	31.6	0.3	52.9	42.8	73.9	53.9	21.0	11.1	*1)
Vert.	5350.0	44.3	34.8	31.7	6.2	31.6	0.3	50.5	41.3	73.9	53.9	23.4	12.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (106-tone RU)

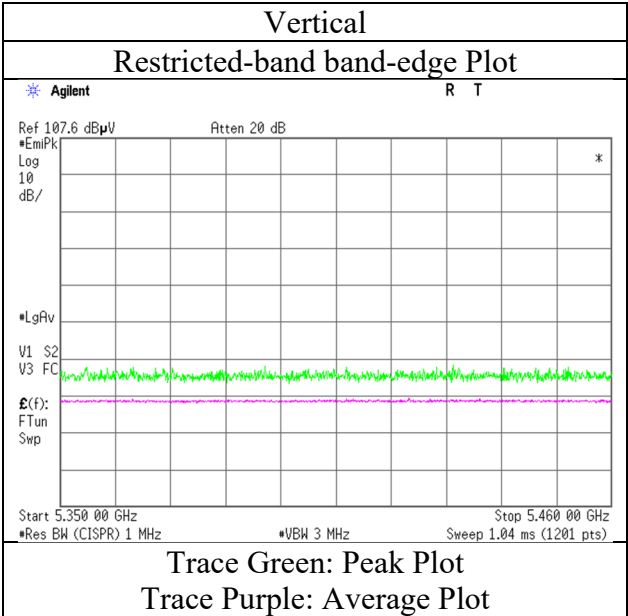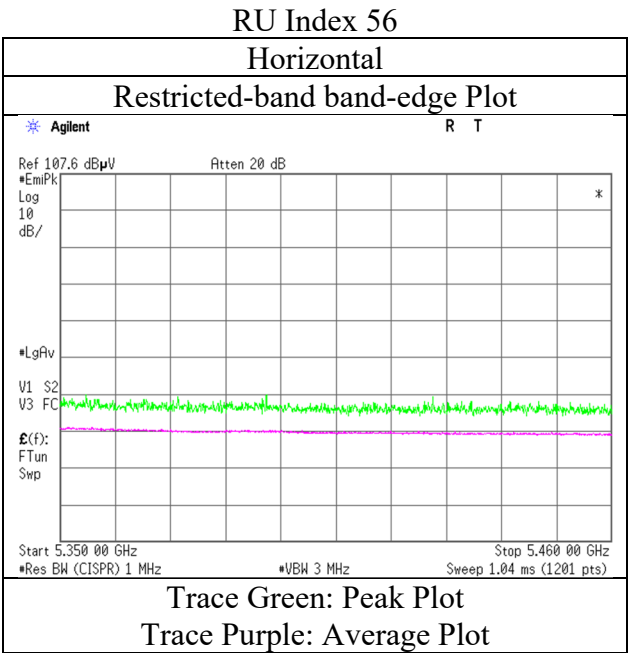

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (242-tone RU)

RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	49.1	37.6	31.7	6.2	31.6	0.4	55.4	44.2	73.9	53.9	18.6	9.7	*1)
Vert.	5350.0	47.9	36.9	31.7	6.2	31.6	0.4	54.2	43.5	73.9	53.9	19.8	10.4	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log (3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place

Semi Anechoic Chamber

Date

Temperature / Humidity

Engineer

Mode

Ise EMC Lab.

No.3



January 31, 2022

20 deg. C / 35 % RH

Yuta Moriya

(1 GHz - 10 GHz)

Tx 11ax-40 5310 MHz (242-tone RU)

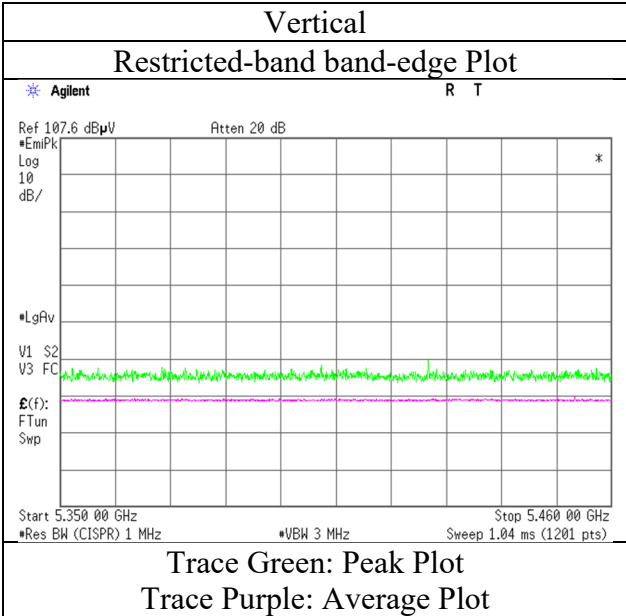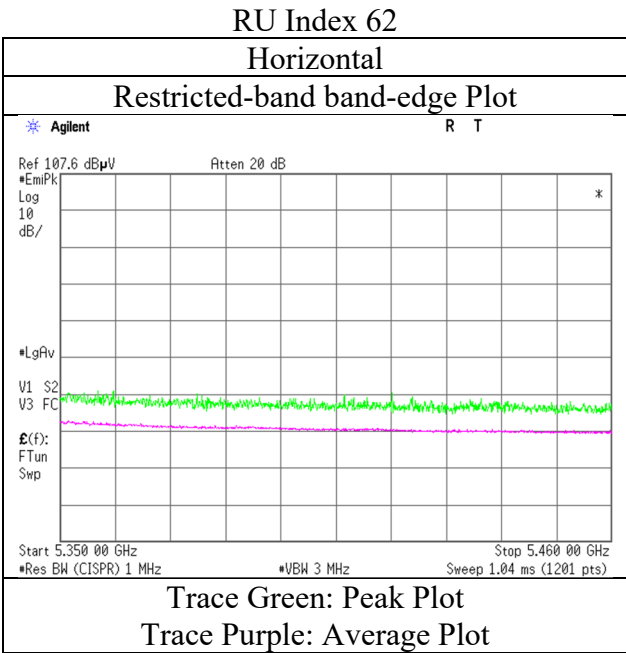

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	51.1	41.0	31.7	6.2	31.6	0.4	57.3	47.6	73.9	53.9	16.6	6.3	*1)
Vert.	5350.0	46.2	38.4	31.7	6.2	31.6	0.4	52.4	45.0	73.9	53.9	21.5	8.9	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.3
January 31, 2022
20 deg. C / 35 % RH
Yuta Moriya
(1 GHz - 10 GHz)
Tx 11ax-40 5310 MHz (484-tone RU)

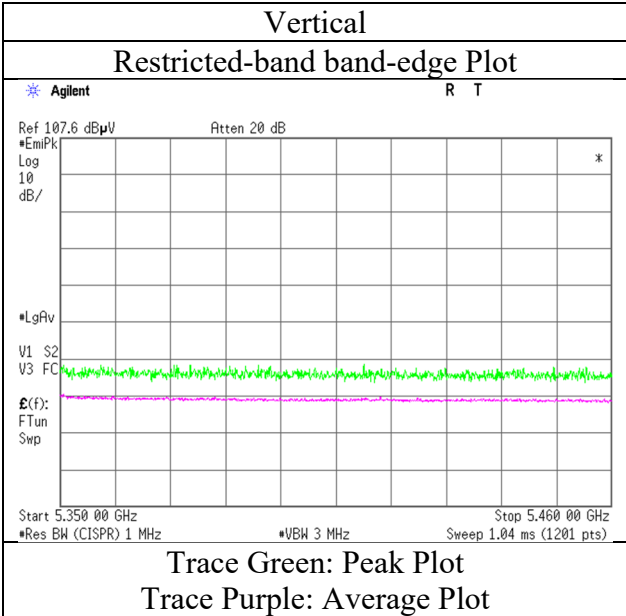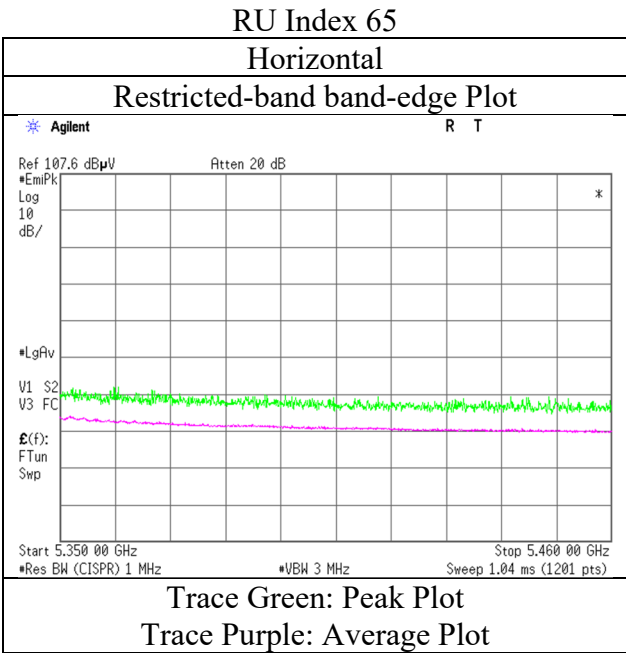

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.3	32.1	31.9	6.2	31.7	0.2	47.7	38.8	68.2	53.9	20.5	15.1	*1)
Hori.	5470.0	43.4	-	31.9	6.2	31.7	-	49.9	-	68.2	-	18.4	-	
Vert.	5460.0	41.3	32.8	31.9	6.2	31.7	0.2	47.7	39.5	68.2	53.9	20.5	14.4	*1)
Vert.	5470.0	42.5	-	31.9	6.2	31.7	-	48.9	-	68.2	-	19.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (26-tone RU)

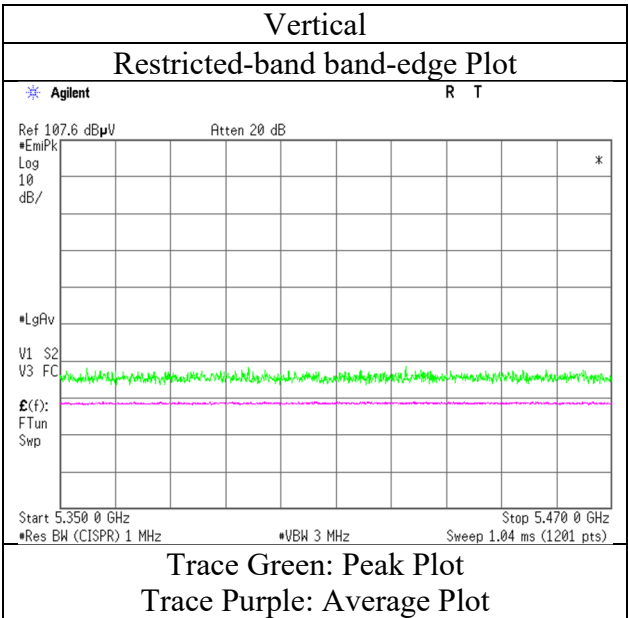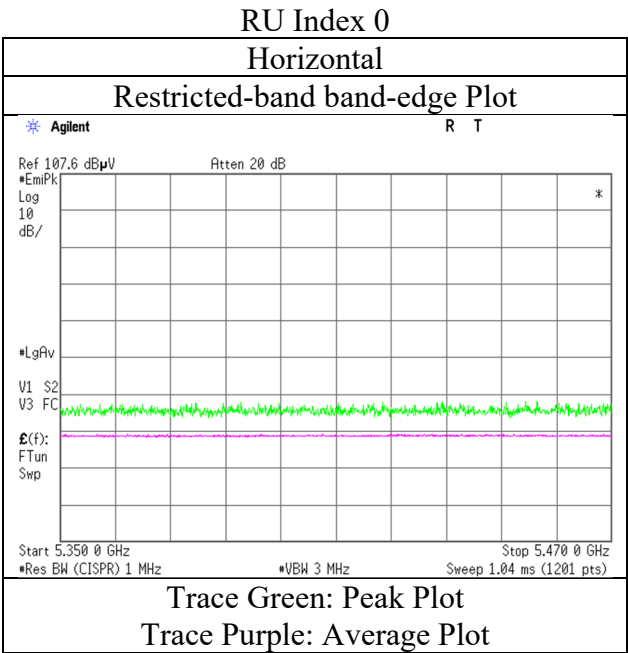

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date January 31, 2022
Temperature / Humidity 20 deg. C / 35 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5510 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	42.1	34.4	31.9	6.2	31.7	0.3	48.5	41.1	68.2	53.9	19.7	12.8	*1)
Hori.	5470.0	42.6	-	31.9	6.2	31.7	-	49.0	-	68.2	-	19.2	-	
Vert.	5460.0	41.9	34.0	31.9	6.2	31.7	0.3	48.3	40.7	68.2	53.9	19.9	13.2	*1)
Vert.	5470.0	41.9	-	31.9	6.2	31.7	-	48.4	-	68.2	-	19.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (52-tone RU)

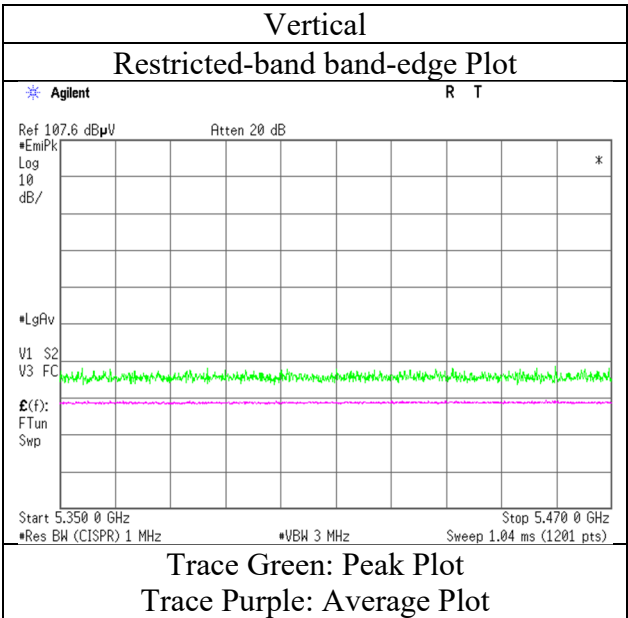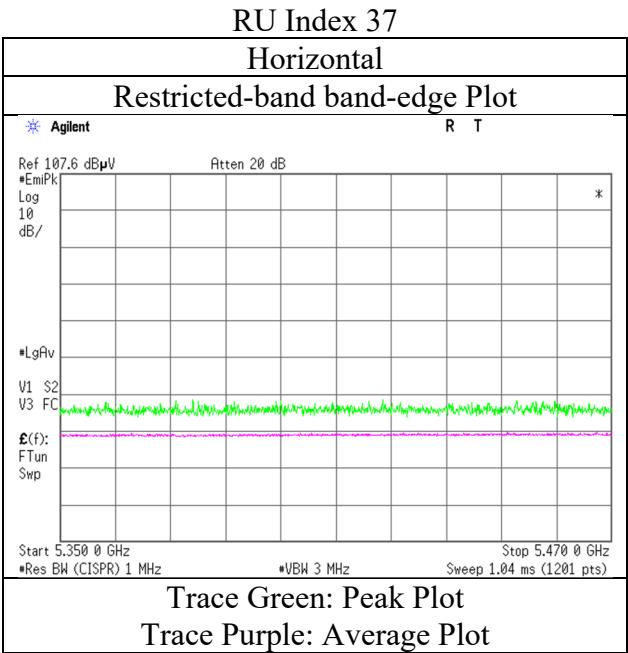

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	43.9	35.6	31.9	6.2	31.7	0.3	50.3	42.4	68.2	53.9	17.9	11.5	*1)
Hori.	5470.0	44.7	-	31.9	6.2	31.7	-	51.1	-	68.2	-	17.1	-	
Vert.	5460.0	43.8	35.1	31.9	6.2	31.7	0.3	50.3	41.8	68.2	53.9	17.9	12.1	*1)
Vert.	5470.0	44.9	-	31.9	6.2	31.7	-	51.4	-	68.2	-	16.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.3
January 31, 2022
20 deg. C / 35 % RH
Yuta Moriya
(1 GHz - 10 GHz)
Tx 11ax-40 5510 MHz (106-tone RU)

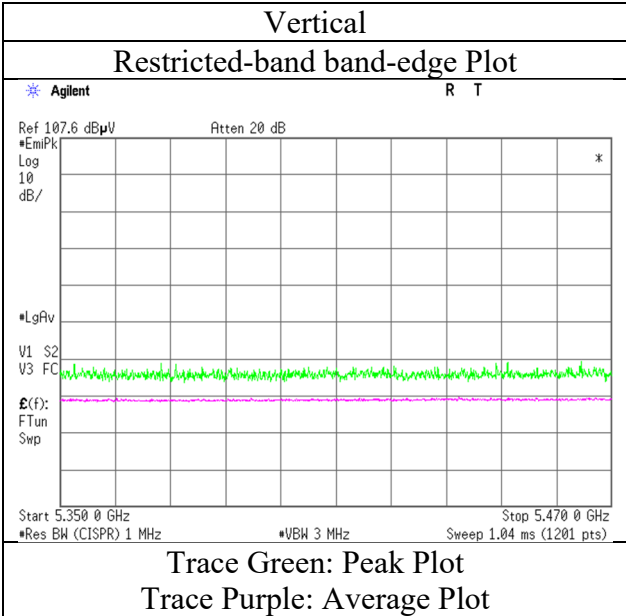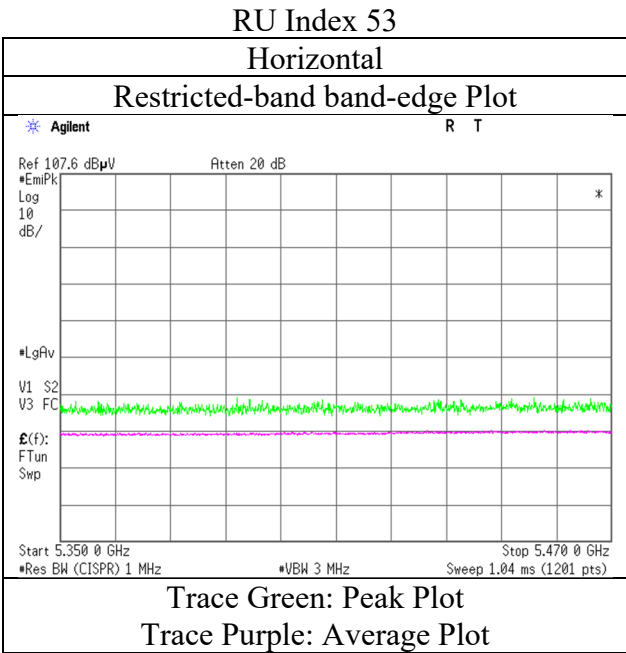

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date January 31, 2022
Temperature / Humidity 20 deg. C / 35 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5510 MHz (242-tone RU)

RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	47.0	36.9	31.9	6.2	31.7	0.4	53.5	43.7	68.2	53.9	14.7	10.2	*1)
Hori.	5470.0	48.4	-	31.9	6.2	31.7	-	54.9	-	68.2	-	13.3	-	
Vert.	5460.0	46.1	35.8	31.9	6.2	31.7	0.4	52.5	42.6	68.2	53.9	15.7	11.3	*1)
Vert.	5470.0	47.6	-	31.9	6.2	31.7	-	54.1	-	68.2	-	14.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (242-tone RU)

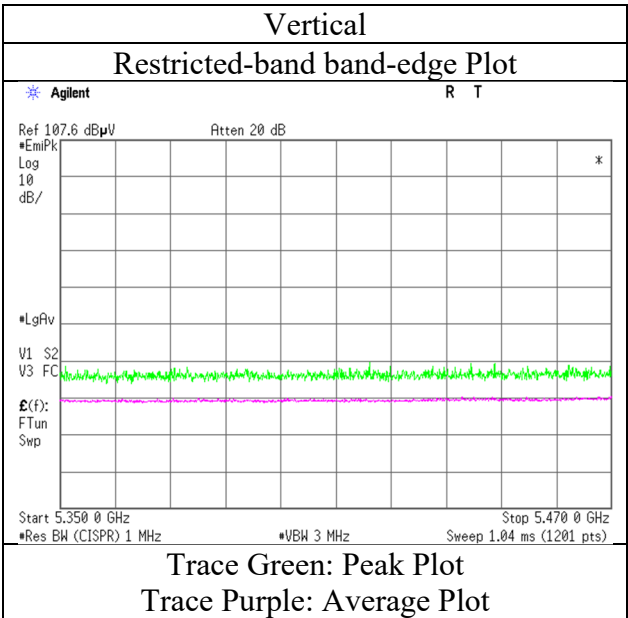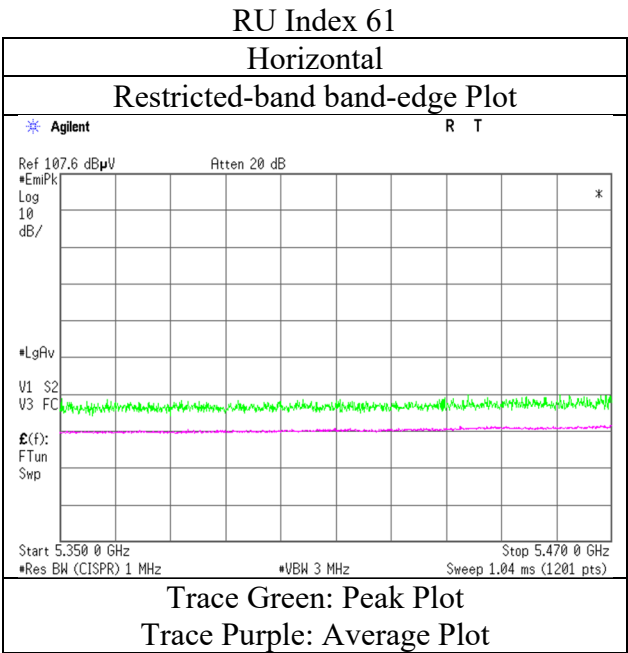

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	49.8	38.5	31.9	6.2	31.7	0.4	56.2	45.4	68.2	53.9	12.0	8.6	*1)
Hori.	5470.0	51.8	-	31.9	6.2	31.7	-	58.3	-	68.2	-	9.9	-	
Vert.	5460.0	48.4	38.5	31.9	6.2	31.7	0.4	54.8	45.3	68.2	53.9	13.4	8.6	*1)
Vert.	5470.0	51.3	-	31.9	6.2	31.7	-	57.8	-	68.2	-	10.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (484-tone RU)

RU Index 65

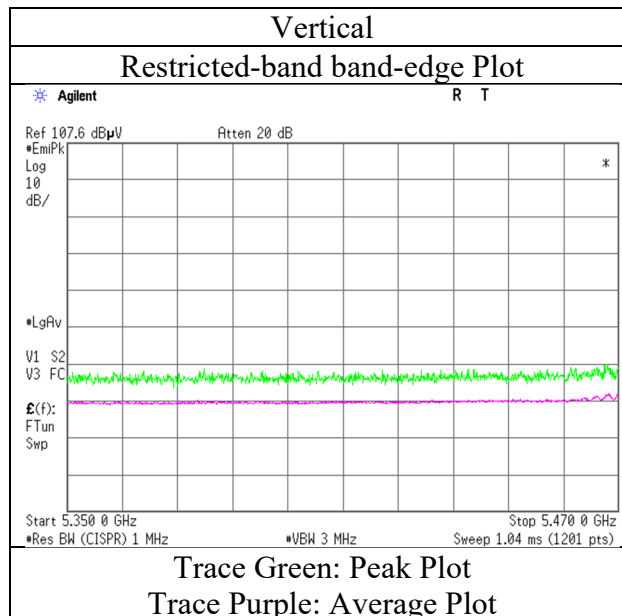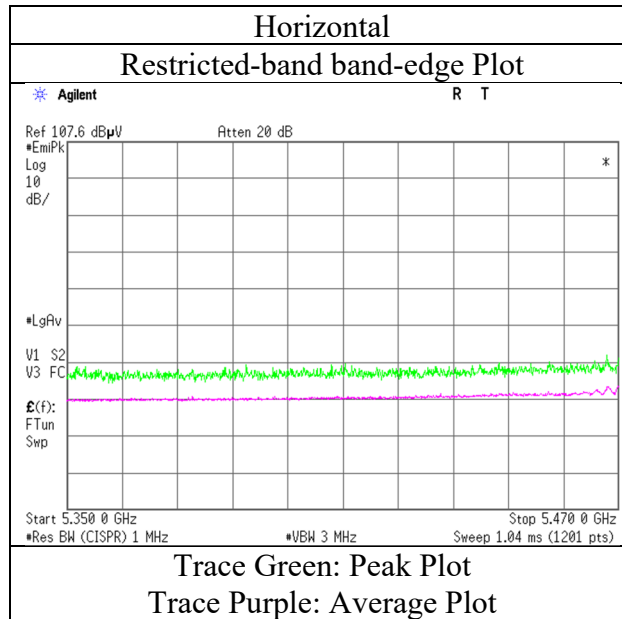

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	41.5	-	32.1	6.3	31.7	-	48.2	-	68.2	-	20.0	-	
Vert.	5725.0	41.2	-	32.1	6.3	31.7	-	48.0	-	68.2	-	20.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

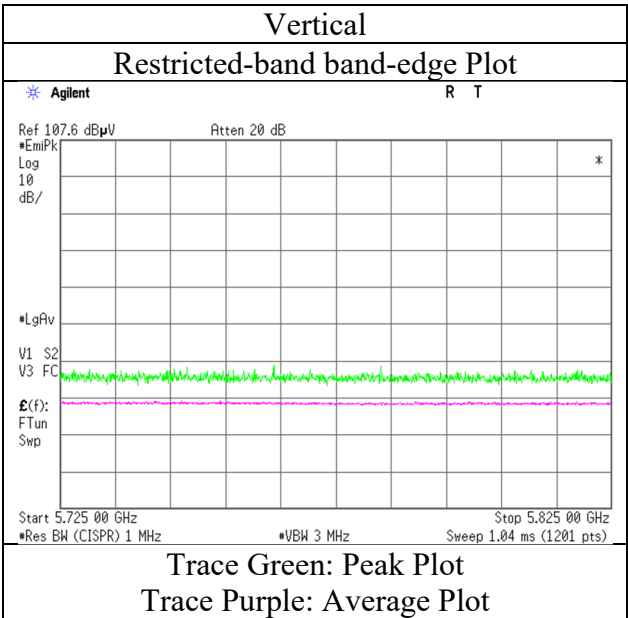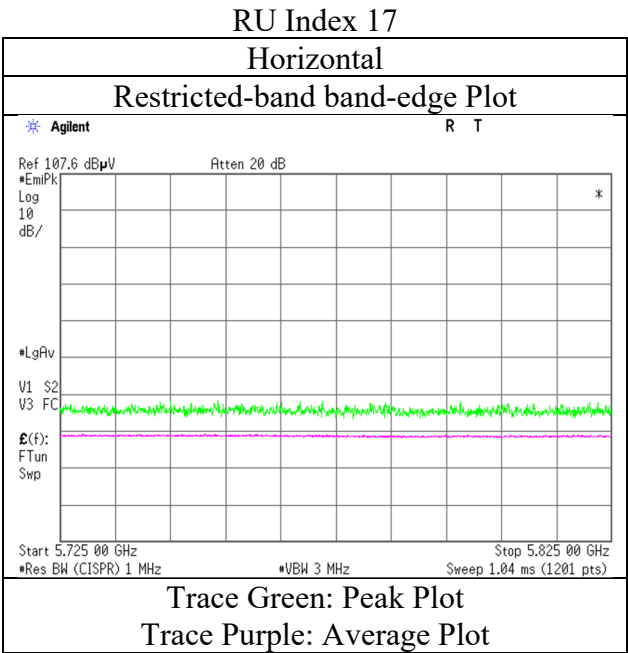

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (52-tone RU)

RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.5	-	32.1	6.3	31.7	-	50.2	-	68.2	-	18.0	-	
Vert.	5725.0	42.3	-	32.1	6.3	31.7	-	49.1	-	68.2	-	19.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.3
January 31, 2022
20 deg. C / 35 % RH
Yuta Moriya
(1 GHz - 10 GHz)
Tx 11ax-40 5670 MHz (52-tone RU)

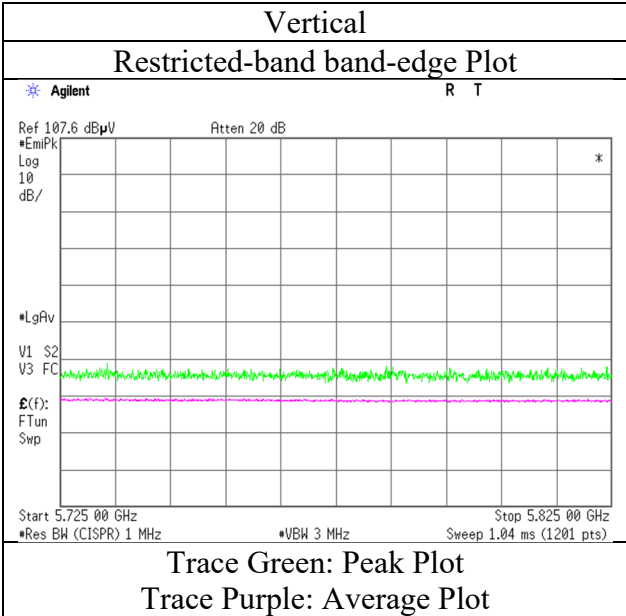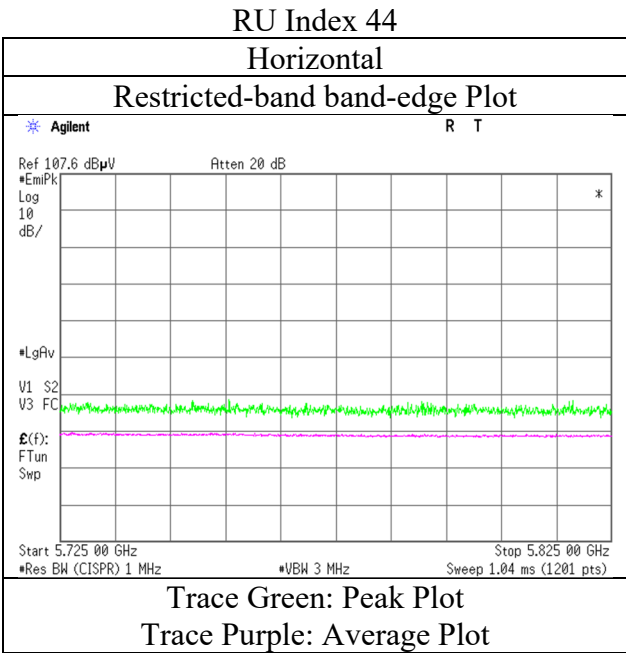

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (106-tone RU)

RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.6	-	32.1	6.3	31.7	-	50.4	-	68.2	-	17.8	-	
Vert.	5725.0	41.9	-	32.1	6.3	31.7	-	48.7	-	68.2	-	19.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (106-tone RU)

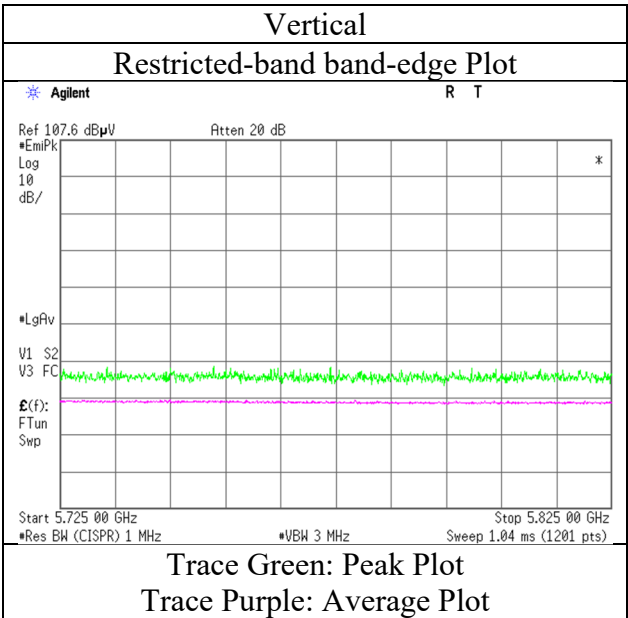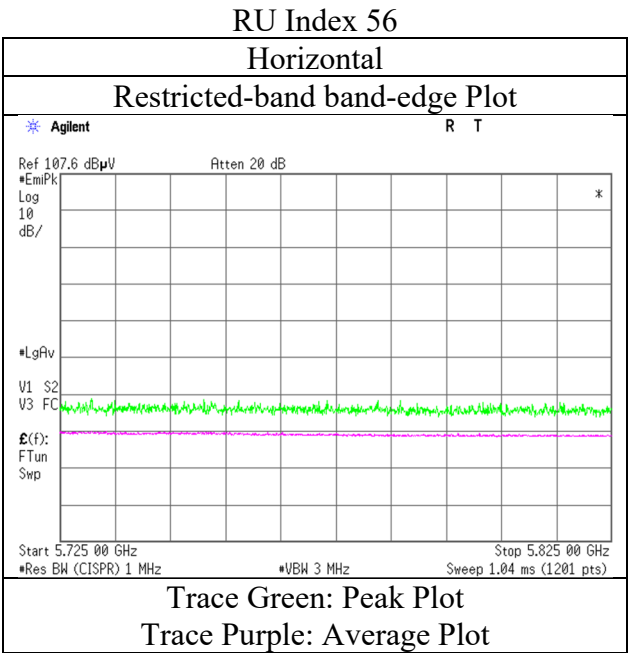

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (242-tone RU)

RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	45.8	-	32.1	6.3	31.7	-	52.6	-	68.2	-	15.6	-	
Vert.	5725.0	44.1	-	32.1	6.3	31.7	-	50.9	-	68.2	-	17.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (242-tone RU)

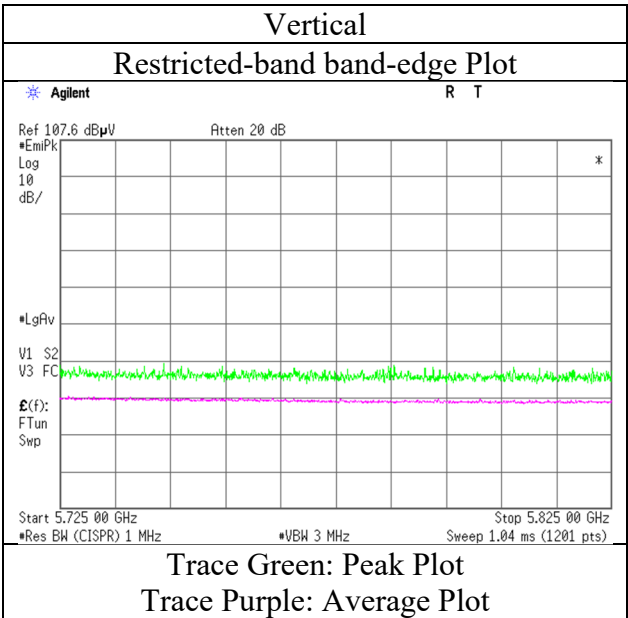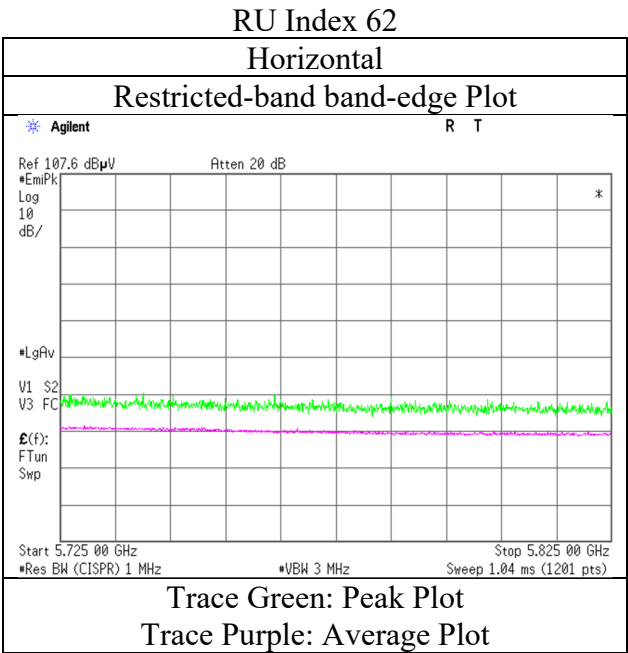

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 31, 2022
Temperature / Humidity	20 deg. C / 35 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	46.7	-	32.1	6.3	31.7	-	53.5	-	68.2	-	14.7	-	
Vert.	5725.0	43.7	-	32.1	6.3	31.7	-	50.5	-	68.2	-	17.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place

Semi Anechoic Chamber

Date

Temperature / Humidity

Engineer

Mode

Ise EMC Lab.

No.3



January 31, 2022

20 deg. C / 35 % RH

Yuta Moriya

(1 GHz - 10 GHz)

Tx 11ax-40 5670 MHz (484-tone RU)

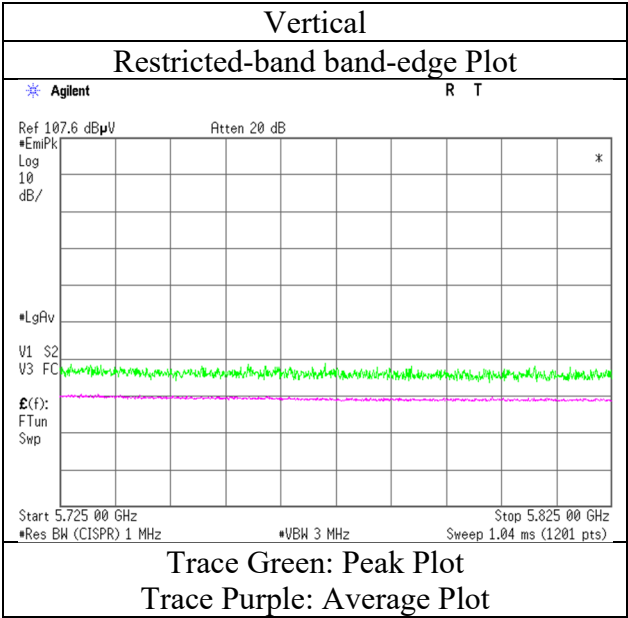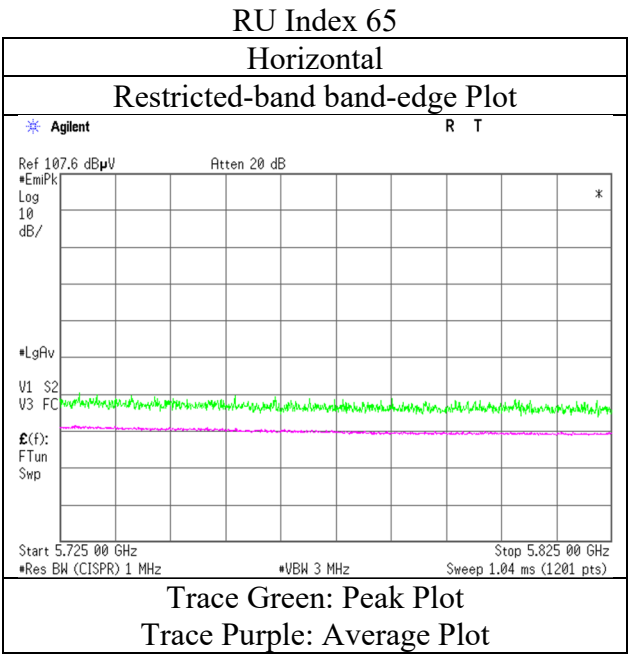

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.6	-	31.9	6.3	31.7	-	47.2	-	68.2	-	21.0	-	
Hori.	5700.0	41.1	-	32.1	6.3	31.7	-	47.8	-	105.2	-	57.4	-	
Hori.	5720.0	41.4	-	32.1	6.3	31.7	-	48.1	-	110.8	-	62.7	-	
Hori.	5725.0	41.5	-	32.1	6.3	31.7	-	48.2	-	122.2	-	74.0	-	
Vert.	5650.0	40.0	-	31.9	6.3	31.7	-	46.6	-	68.2	-	21.7	-	
Vert.	5700.0	40.4	-	32.1	6.3	31.7	-	47.1	-	105.2	-	58.1	-	
Vert.	5720.0	41.1	-	32.1	6.3	31.7	-	47.8	-	110.8	-	63.0	-	
Vert.	5725.0	41.3	-	32.1	6.3	31.7	-	48.1	-	122.2	-	74.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (26-tone RU)

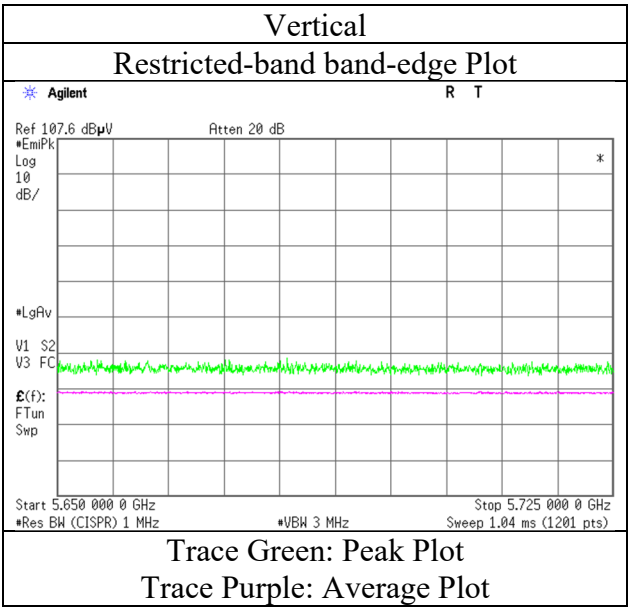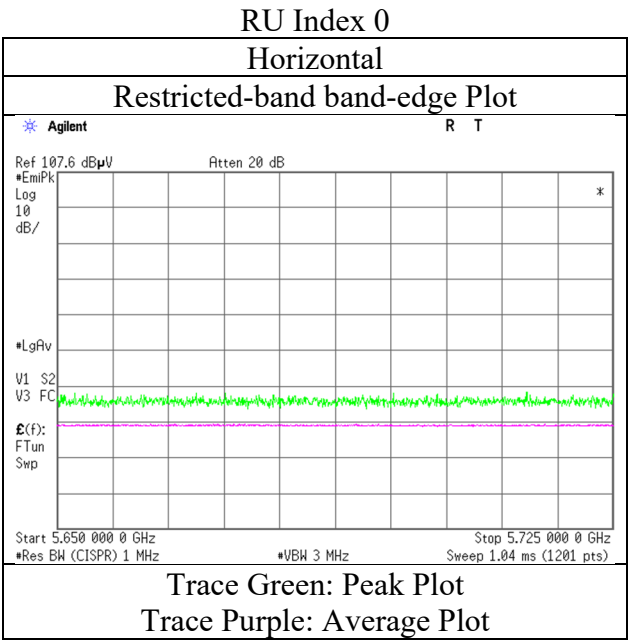

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	41.7	-	31.9	6.3	31.7	-	48.3	-	68.2	-	19.9	-	
Hori.	5700.0	43.6	-	32.1	6.3	31.7	-	50.3	-	105.2	-	55.0	-	
Hori.	5720.0	43.6	-	32.1	6.3	31.7	-	50.4	-	110.8	-	60.4	-	
Hori.	5725.0	43.4	-	32.1	6.3	31.7	-	50.2	-	122.2	-	72.0	-	
Vert.	5650.0	42.4	-	31.9	6.3	31.7	-	49.0	-	68.2	-	19.2	-	
Vert.	5700.0	42.2	-	32.1	6.3	31.7	-	48.9	-	105.2	-	56.3	-	
Vert.	5720.0	42.3	-	32.1	6.3	31.7	-	49.0	-	110.8	-	61.8	-	
Vert.	5725.0	42.5	-	32.1	6.3	31.7	-	49.3	-	122.2	-	72.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

RU Index 37

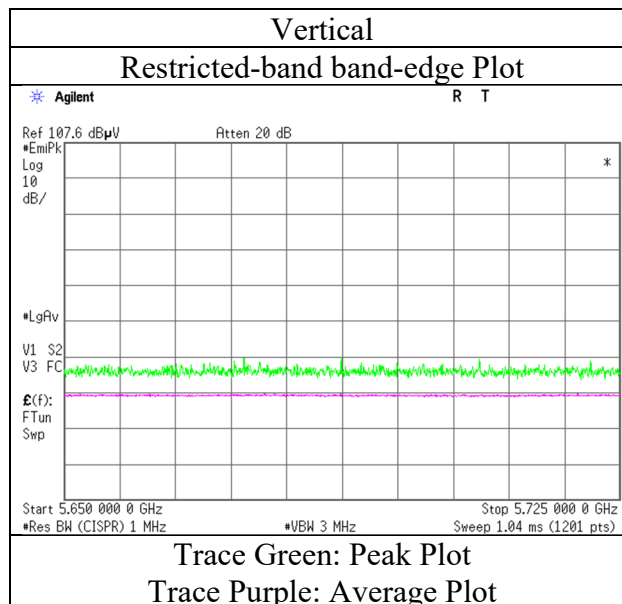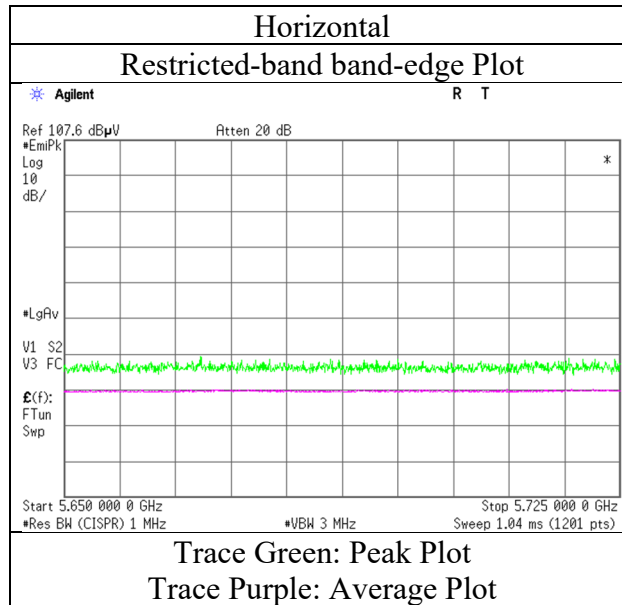

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	42.4	-	31.9	6.3	31.7	-	49.0	-	68.2	-	19.2	-	
Hori.	5700.0	43.7	-	32.1	6.3	31.7	-	50.4	-	105.2	-	54.8	-	
Hori.	5720.0	44.7	-	32.1	6.3	31.7	-	51.5	-	110.8	-	59.3	-	
Hori.	5725.0	47.6	-	32.1	6.3	31.7	-	54.4	-	122.2	-	67.8	-	
Vert.	5650.0	42.6	-	31.9	6.3	31.7	-	49.2	-	68.2	-	19.0	-	
Vert.	5700.0	42.5	-	32.1	6.3	31.7	-	49.2	-	105.2	-	56.0	-	
Vert.	5720.0	43.8	-	32.1	6.3	31.7	-	50.6	-	110.8	-	60.2	-	
Vert.	5725.0	45.2	-	32.1	6.3	31.7	-	51.9	-	122.2	-	70.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (106-tone RU)

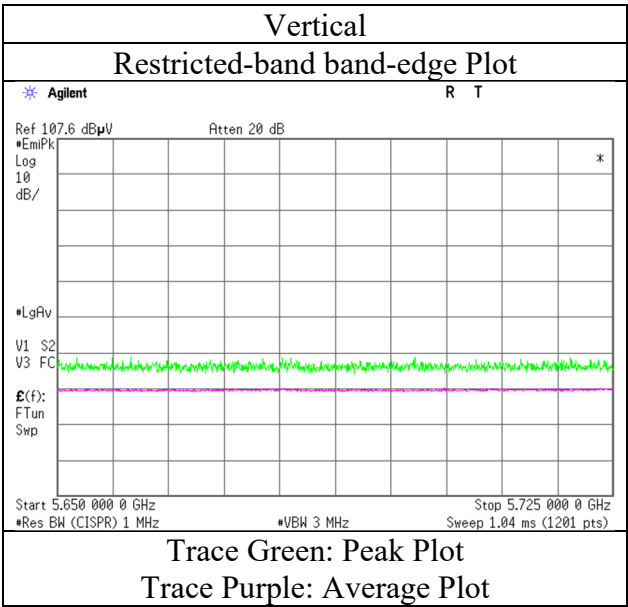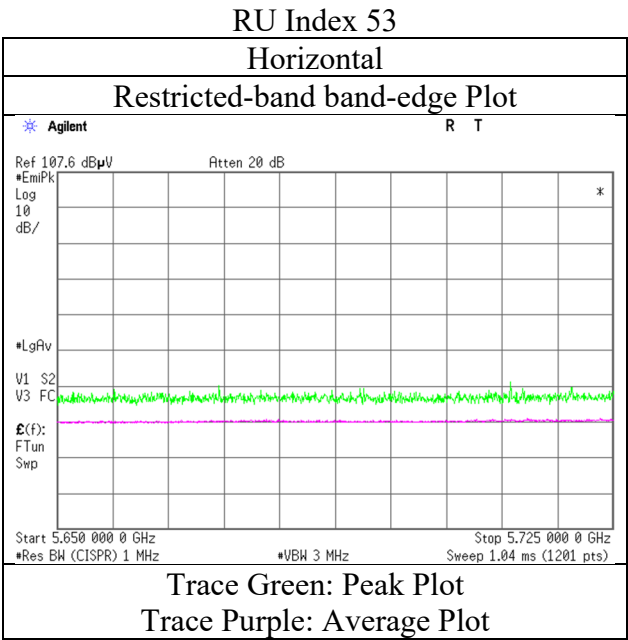

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (242-tone RU)

RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	46.4	-	31.9	6.3	31.7	-	52.9	-	68.2	-	15.3	-	
Hori.	5700.0	46.8	-	32.1	6.3	31.7	-	53.4	-	105.2	-	51.8	-	
Hori.	5720.0	50.9	-	32.1	6.3	31.7	-	57.6	-	110.8	-	53.2	-	
Hori.	5725.0	51.4	-	32.1	6.3	31.7	-	58.2	-	122.2	-	64.0	-	
Vert.	5650.0	44.6	-	31.9	6.3	31.7	-	51.2	-	68.2	-	17.0	-	
Vert.	5700.0	44.9	-	32.1	6.3	31.7	-	51.6	-	105.2	-	53.6	-	
Vert.	5720.0	48.6	-	32.1	6.3	31.7	-	55.3	-	110.8	-	55.5	-	
Vert.	5725.0	51.3	-	32.1	6.3	31.7	-	58.1	-	122.2	-	64.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (242-tone RU)

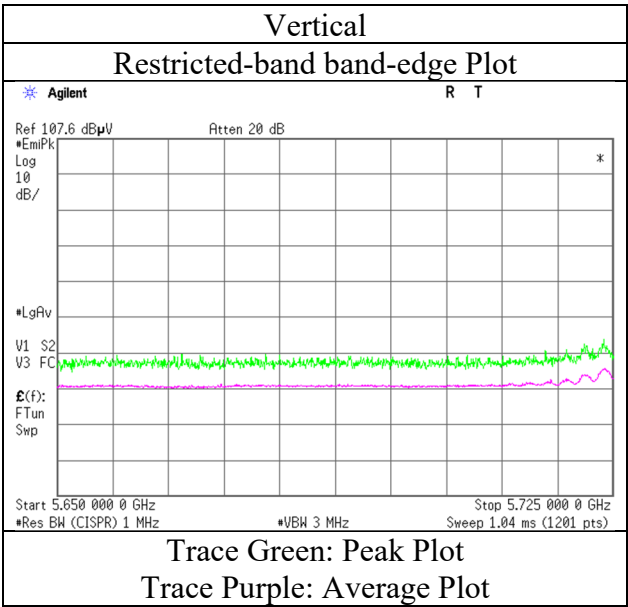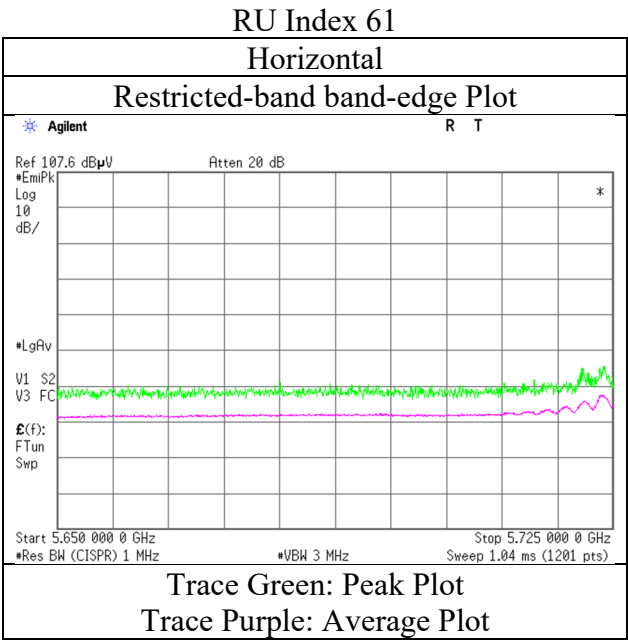

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	45.7	-	31.9	6.3	31.7	-	52.3	-	68.2	-	15.9	-	
Hori.	5700.0	47.2	-	32.1	6.3	31.7	-	53.9	-	105.2	-	51.3	-	
Hori.	5720.0	52.0	-	32.1	6.3	31.7	-	58.7	-	110.8	-	52.1	-	
Hori.	5725.0	52.0	-	32.1	6.3	31.7	-	58.8	-	122.2	-	63.4	-	
Vert.	5650.0	45.1	-	31.9	6.3	31.7	-	51.7	-	68.2	-	16.5	-	
Vert.	5700.0	45.5	-	32.1	6.3	31.7	-	52.2	-	105.2	-	53.0	-	
Vert.	5720.0	49.4	-	32.1	6.3	31.7	-	56.2	-	110.8	-	54.6	-	
Vert.	5725.0	50.0	-	32.1	6.3	31.7	-	56.8	-	122.2	-	65.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (484-tone RU)

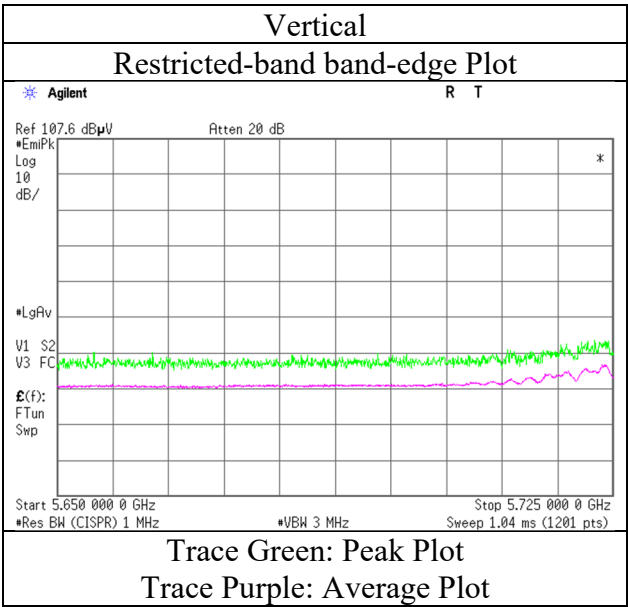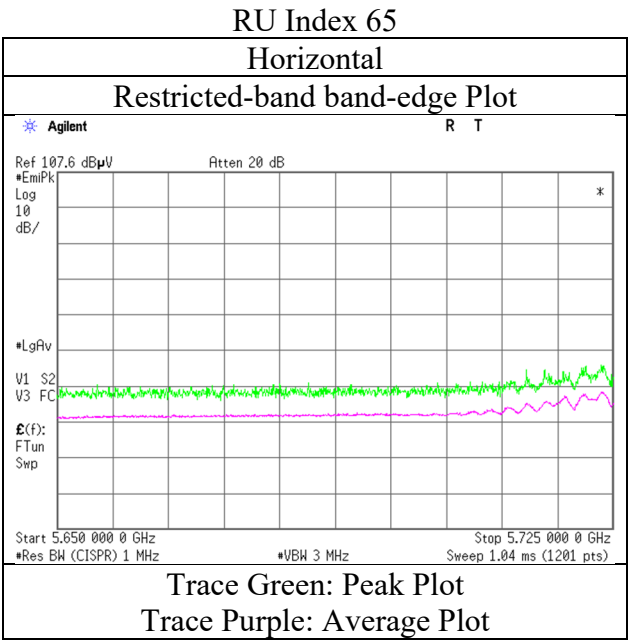

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (26-tone RU)

RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	41.8	-	32.5	6.4	31.7	-	49.0	-	122.2	-	73.3	-	
Hori.	5855.0	40.9	-	32.5	6.4	31.7	-	48.0	-	110.8	-	62.8	-	
Hori.	5875.0	40.3	-	32.5	6.4	31.7	-	47.5	-	105.2	-	57.7	-	
Hori.	5925.0	41.5	-	32.5	6.4	31.7	-	48.7	-	68.2	-	19.6	-	
Vert.	5850.0	40.8	-	32.5	6.4	31.7	-	47.9	-	122.2	-	74.3	-	
Vert.	5855.0	40.4	-	32.5	6.4	31.7	-	47.5	-	110.8	-	63.3	-	
Vert.	5875.0	41.1	-	32.5	6.4	31.7	-	48.3	-	105.2	-	56.9	-	
Vert.	5925.0	40.3	-	32.5	6.4	31.7	-	47.5	-	68.2	-	20.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (26-tone RU)

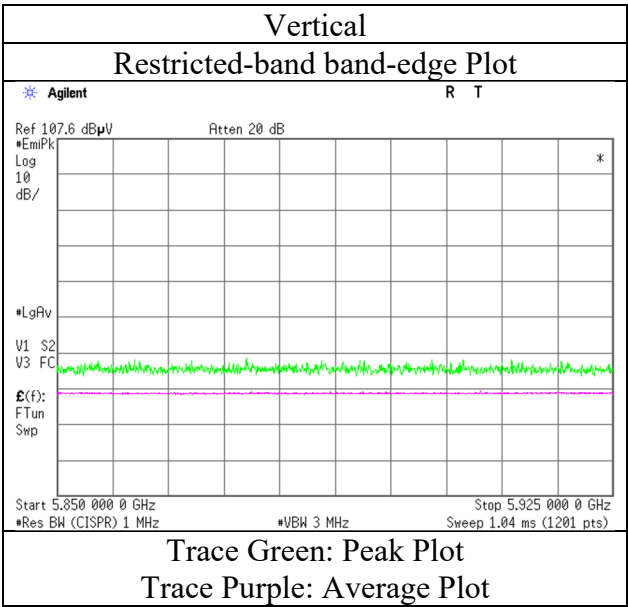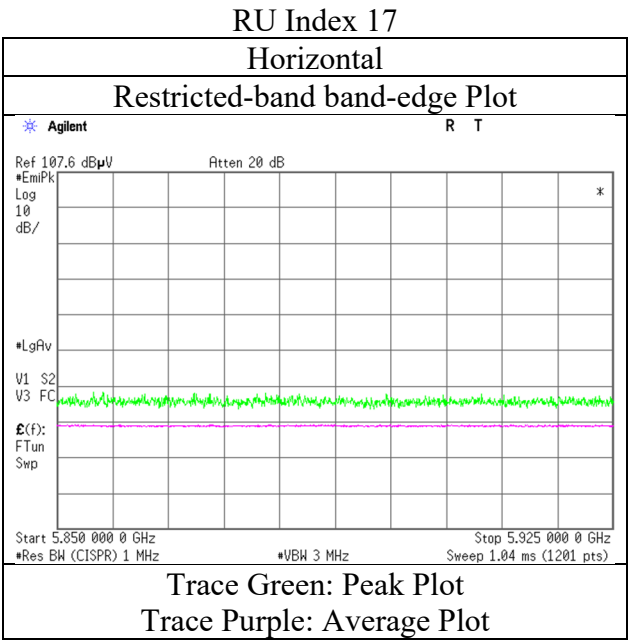

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (52-tone RU)

RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	43.1	-	32.5	6.4	31.7	-	50.2	-	122.2	-	72.0	-	
Hori.	5855.0	42.2	-	32.5	6.4	31.7	-	49.4	-	110.8	-	61.4	-	
Hori.	5875.0	42.0	-	32.5	6.4	31.7	-	49.2	-	105.2	-	56.0	-	
Hori.	5925.0	41.6	-	32.5	6.4	31.7	-	48.8	-	68.2	-	19.4	-	
Vert.	5850.0	41.6	-	32.5	6.4	31.7	-	48.8	-	122.2	-	73.5	-	
Vert.	5855.0	41.1	-	32.5	6.4	31.7	-	48.2	-	110.8	-	62.6	-	
Vert.	5875.0	42.3	-	32.5	6.4	31.7	-	49.5	-	105.2	-	55.7	-	
Vert.	5925.0	40.2	-	32.5	6.4	31.7	-	47.4	-	68.2	-	20.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (52-tone RU)

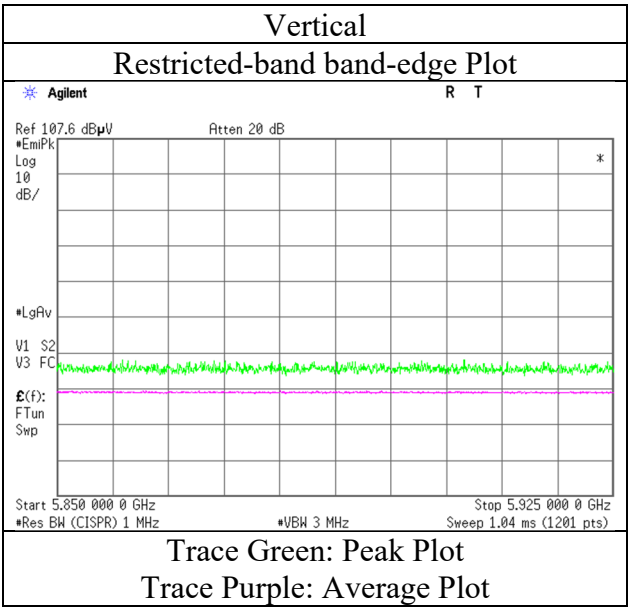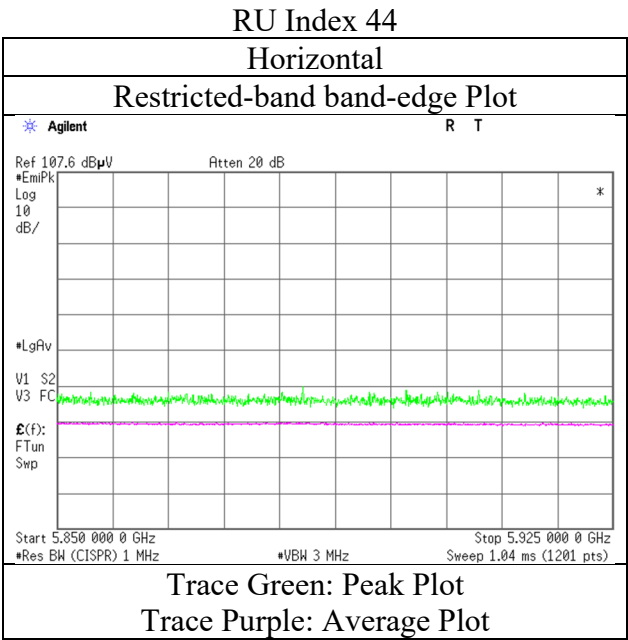

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (106-tone RU)

RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	44.7	-	32.5	6.4	31.7	-	51.9	-	122.2	-	70.3	-	
Hori.	5855.0	43.9	-	32.5	6.4	31.7	-	51.1	-	110.8	-	59.7	-	
Hori.	5875.0	44.3	-	32.5	6.4	31.7	-	51.4	-	105.2	-	53.8	-	
Hori.	5925.0	42.3	-	32.5	6.4	31.7	-	49.5	-	68.2	-	18.7	-	
Vert.	5850.0	43.0	-	32.5	6.4	31.7	-	50.1	-	122.2	-	72.1	-	
Vert.	5855.0	41.6	-	32.5	6.4	31.7	-	48.7	-	110.8	-	62.1	-	
Vert.	5875.0	42.4	-	32.5	6.4	31.7	-	49.5	-	105.2	-	55.7	-	
Vert.	5925.0	40.8	-	32.5	6.4	31.7	-	47.9	-	68.2	-	20.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (106-tone RU)

RU Index 56

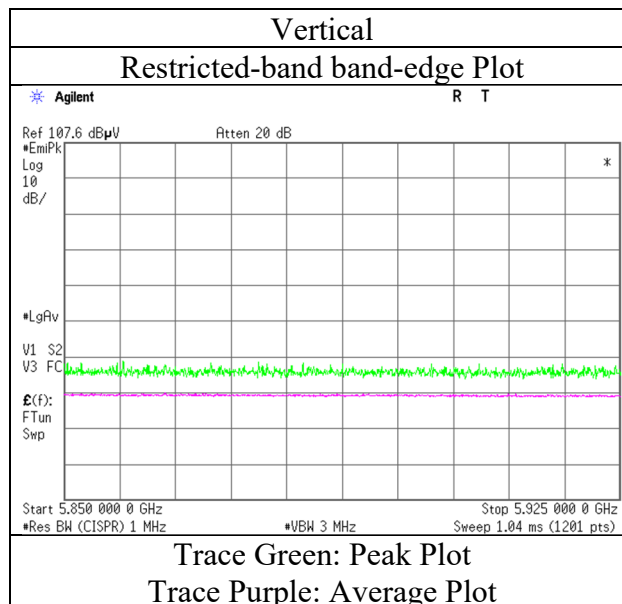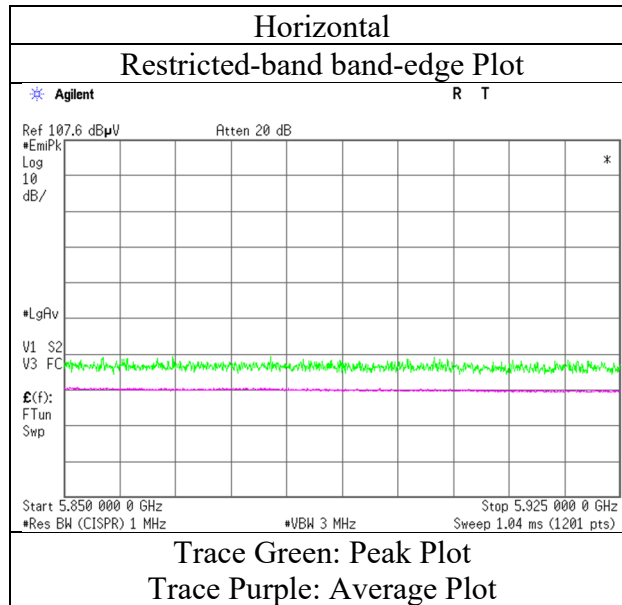

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (242-tone RU)

RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	47.6	-	32.5	6.4	31.7	-	54.7	-	122.2	-	67.5	-	
Hori.	5855.0	47.2	-	32.5	6.4	31.7	-	54.3	-	110.8	-	56.5	-	
Hori.	5875.0	46.1	-	32.5	6.4	31.7	-	53.2	-	105.2	-	52.0	-	
Hori.	5925.0	43.6	-	32.5	6.4	31.7	-	50.8	-	68.2	-	17.4	-	
Vert.	5850.0	44.5	-	32.5	6.4	31.7	-	51.6	-	122.2	-	70.6	-	
Vert.	5855.0	44.4	-	32.5	6.4	31.7	-	51.6	-	110.8	-	59.2	-	
Vert.	5875.0	43.5	-	32.5	6.4	31.7	-	50.7	-	105.2	-	54.5	-	
Vert.	5925.0	41.7	-	32.5	6.4	31.7	-	48.9	-	68.2	-	19.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (242-tone RU)

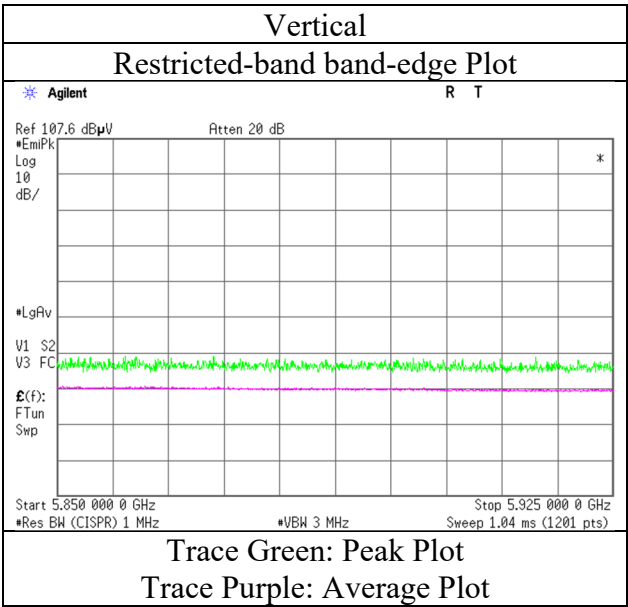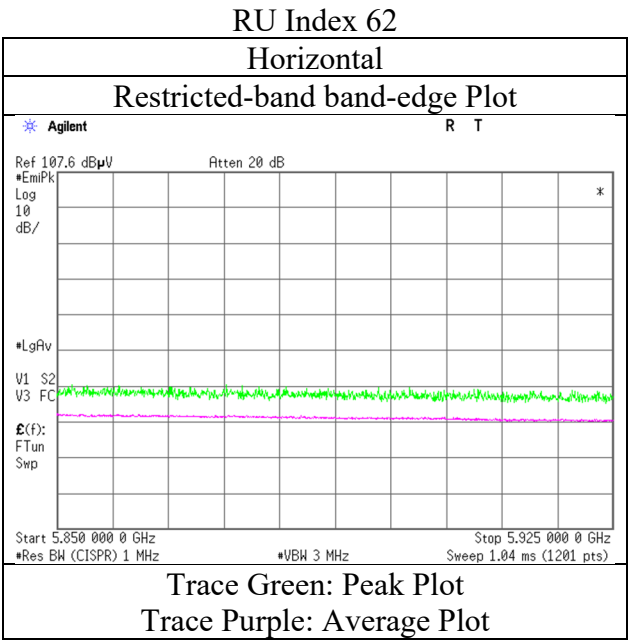

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	48.2	-	32.5	6.4	31.7	-	55.3	-	122.2	-	66.9	-	
Hori.	5855.0	47.5	-	32.5	6.4	31.7	-	54.7	-	110.8	-	56.2	-	
Hori.	5875.0	45.7	-	32.5	6.4	31.7	-	52.9	-	105.2	-	52.3	-	
Hori.	5925.0	43.6	-	32.5	6.4	31.7	-	50.8	-	68.2	-	17.4	-	
Vert.	5850.0	44.6	-	32.5	6.4	31.7	-	51.7	-	122.2	-	70.5	-	
Vert.	5855.0	44.5	-	32.5	6.4	31.7	-	51.6	-	110.8	-	59.2	-	
Vert.	5875.0	43.7	-	32.5	6.4	31.7	-	50.8	-	105.2	-	54.4	-	
Vert.	5925.0	41.8	-	32.5	6.4	31.7	-	49.0	-	68.2	-	19.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (484-tone RU)

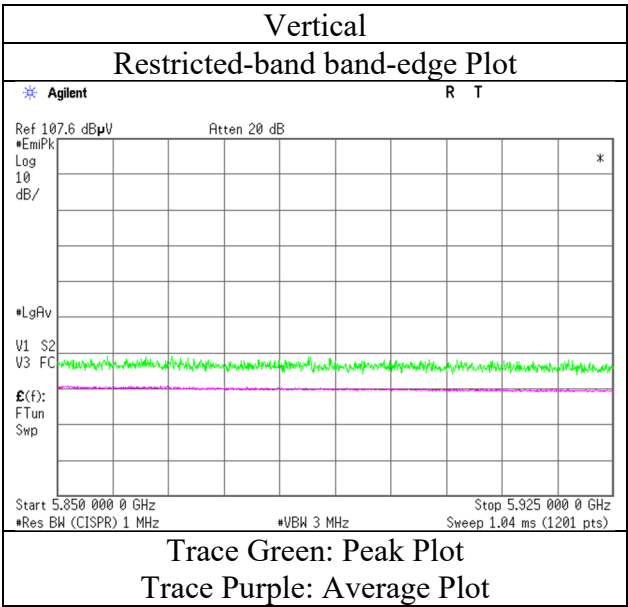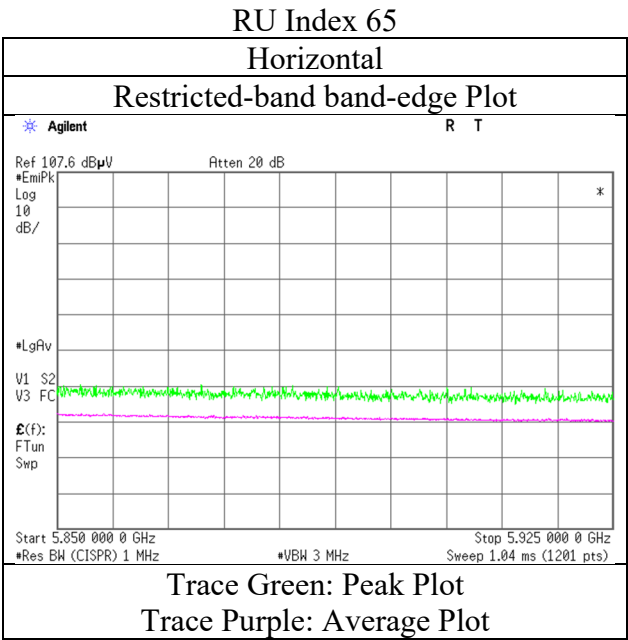

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	40.3	32.6	31.9	6.1	31.6	0.2	46.7	39.3	73.9	53.9	27.2	14.6	*1)
Vert.	5150.0	40.7	32.2	31.9	6.1	31.6	0.2	47.1	38.9	73.9	53.9	26.8	15.0	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (26-tone RU)

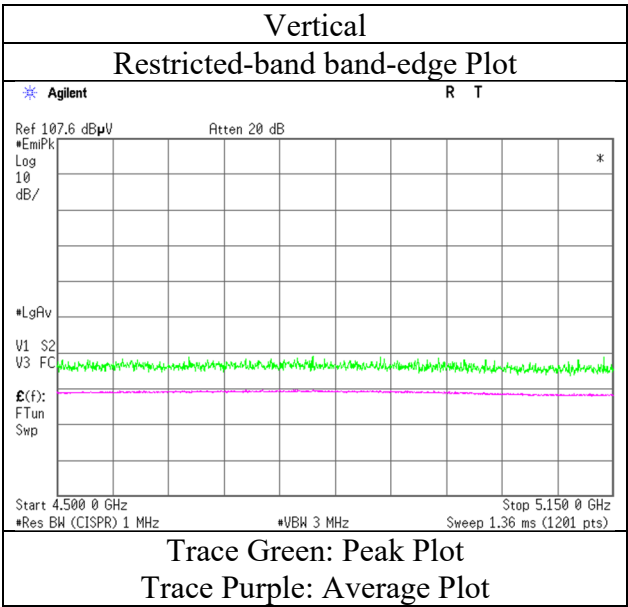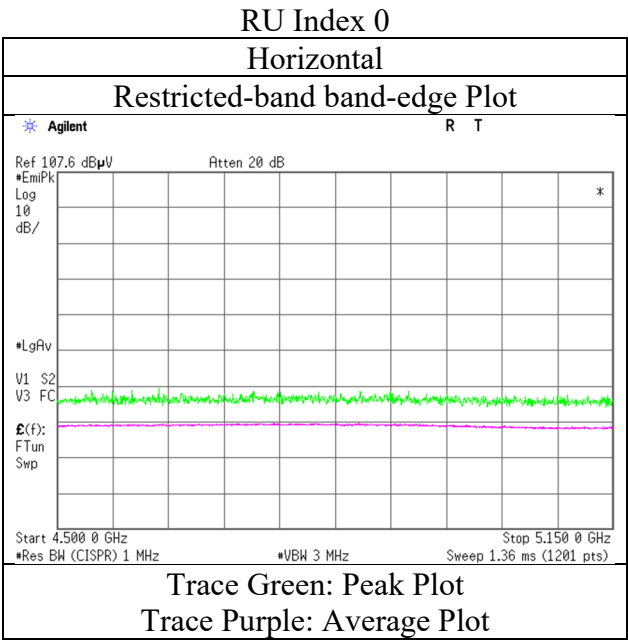

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	40.7	32.9	31.9	6.1	31.6	0.3	47.1	39.6	73.9	53.9	26.8	14.3	*1)
Vert.	5150.0	40.8	32.3	31.9	6.1	31.6	0.3	47.2	39.0	73.9	53.9	26.7	14.9	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (52-tone RU)

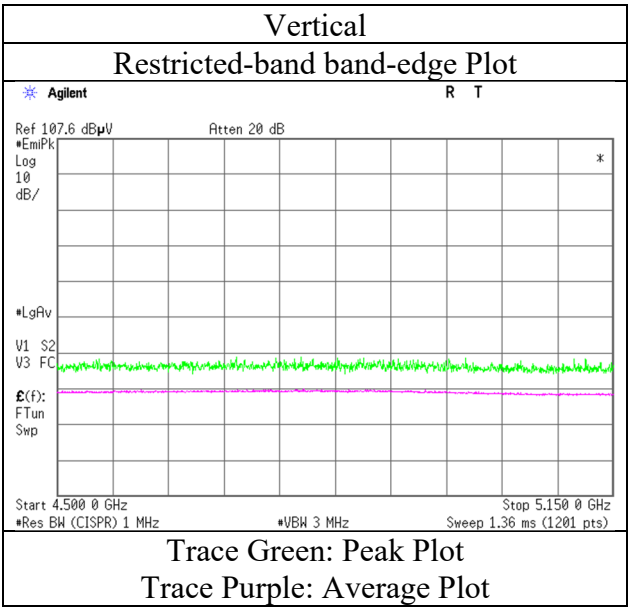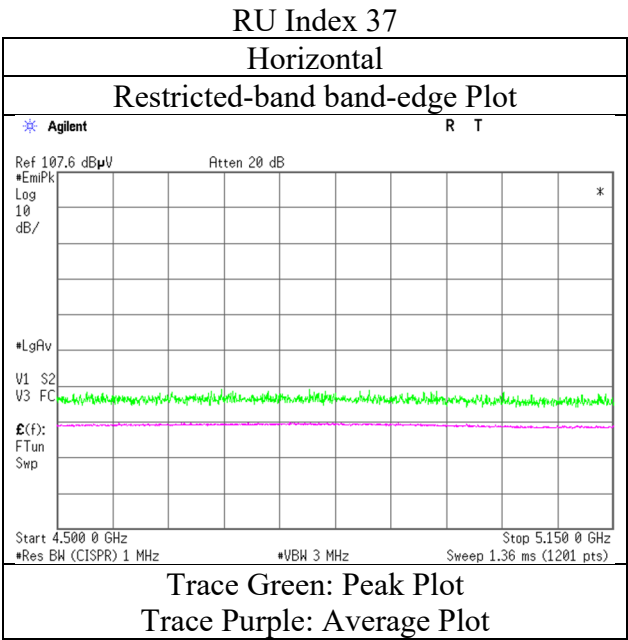

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	44.4	34.2	31.9	6.1	31.6	0.3	50.8	40.9	73.9	53.9	23.1	13.0	*1)
Vert.	5150.0	42.0	33.6	31.9	6.1	31.6	0.3	48.4	40.3	73.9	53.9	25.5	13.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (106-tone RU)

RU Index 53

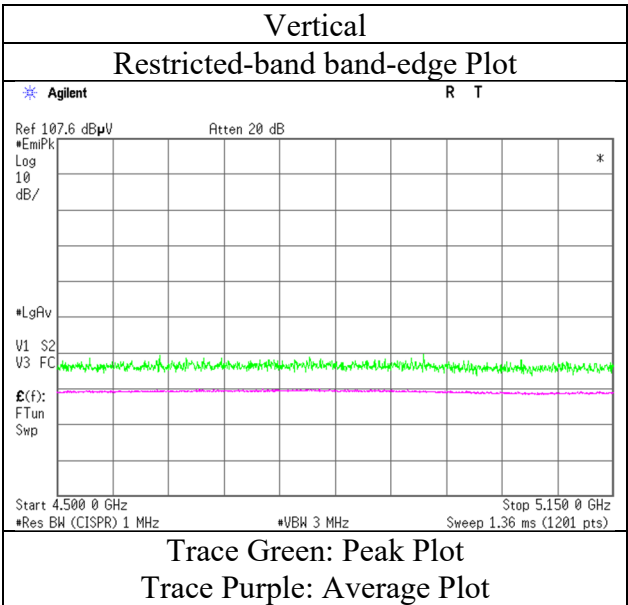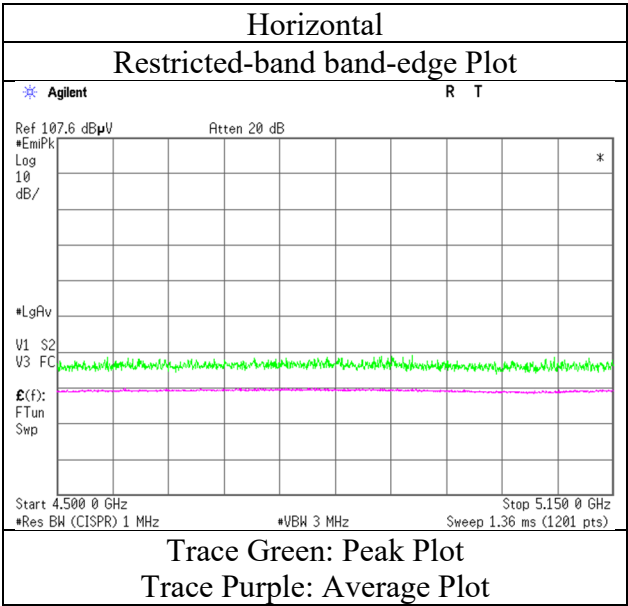

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 1, 2022
Temperature / Humidity 20 deg. C / 36 % RH
Engineer Hiroki Numata
 (1 GHz - 10 GHz)
Mode Tx 11ax-80 5210 MHz (242-tone RU)

RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	44.1	36.4	31.9	6.1	31.6	0.4	50.5	43.2	73.9	53.9	23.4	10.8	*1)
Vert.	5150.0	44.2	35.1	31.9	6.1	31.6	0.4	50.6	41.8	73.9	53.9	23.4	12.1	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (242-tone RU)

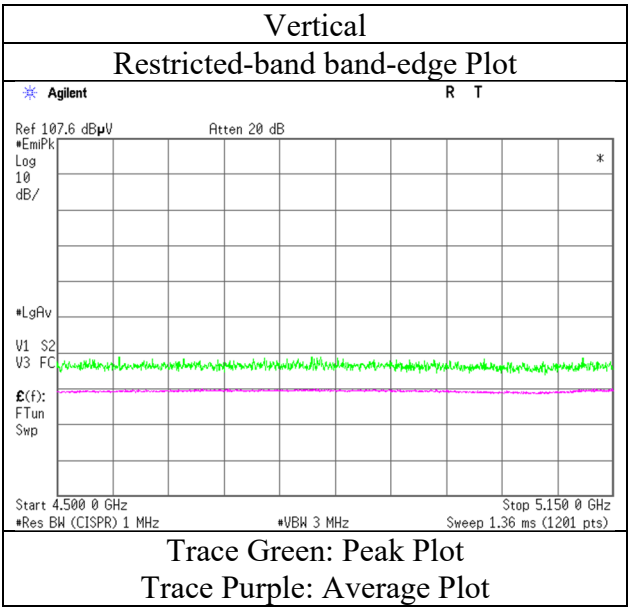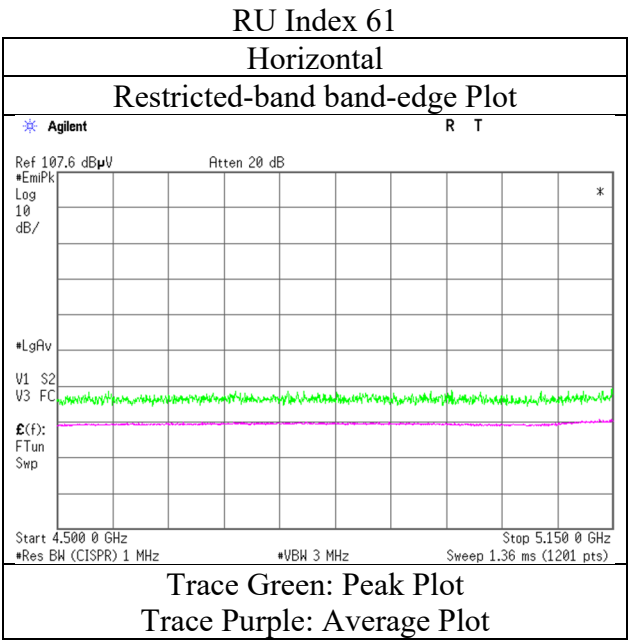

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	47.3	38.4	31.9	6.1	31.6	0.4	53.7	45.2	73.9	53.9	20.2	8.7	*1)
Vert.	5150.0	45.1	36.6	31.9	6.1	31.6	0.4	51.4	43.3	73.9	53.9	22.5	10.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (484-tone RU)

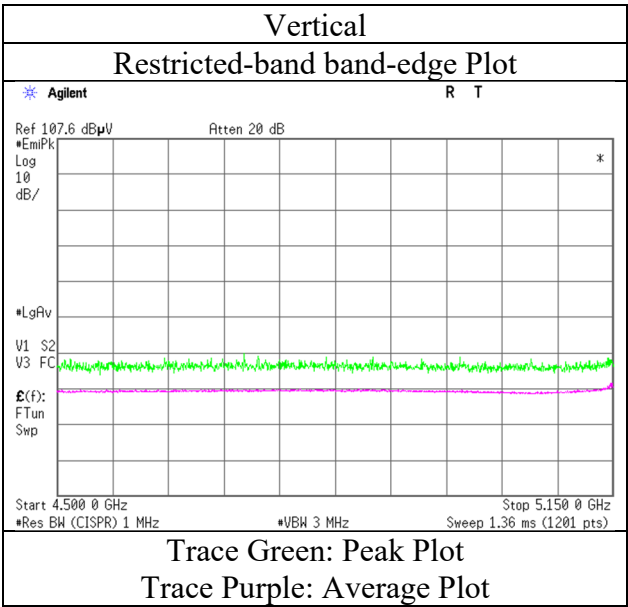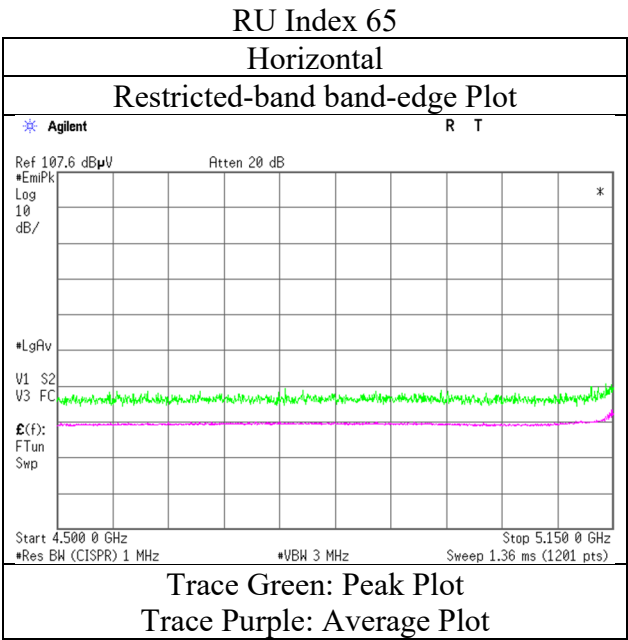

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (996-tone RU)

RU Index 67

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	48.0	38.8	31.9	6.1	31.6	0.4	54.4	45.5	73.9	53.9	19.5	8.4	*1)
Vert.	5150.0	46.1	37.5	31.9	6.1	31.6	0.4	52.5	44.2	73.9	53.9	21.4	9.7	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (996-tone RU)

RU Index 67

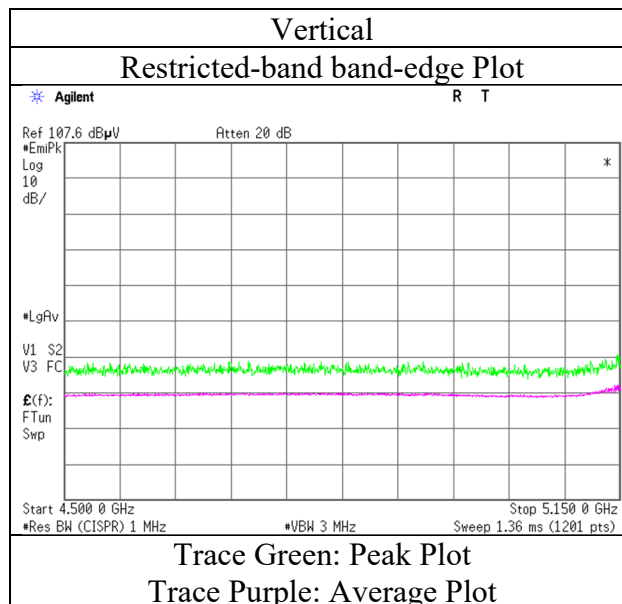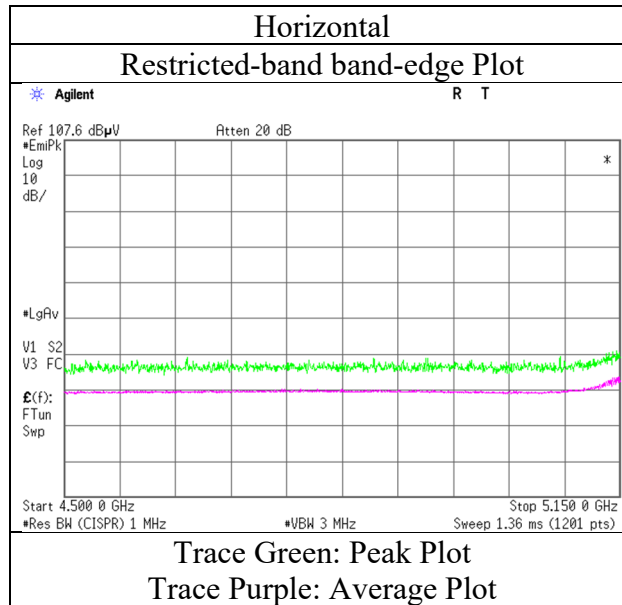

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	February 1, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (26-tone RU)

RU Index 36

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	40.8	32.9	31.7	6.2	31.6	0.2	47.0	39.4	73.9	53.9	26.9	14.6	*1)
Vert.	5350.0	40.8	32.9	31.7	6.2	31.6	0.2	47.0	39.3	73.9	53.9	26.9	14.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB