


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	902.3	0.145	902.228	902.373	≤0.5	PASS
TX	Ant1	906	0.149	905.925	906.074	≤0.5	PASS
TX	Ant1	914.9	0.149	914.826	914.974	≤0.5	PASS

Test Graphs

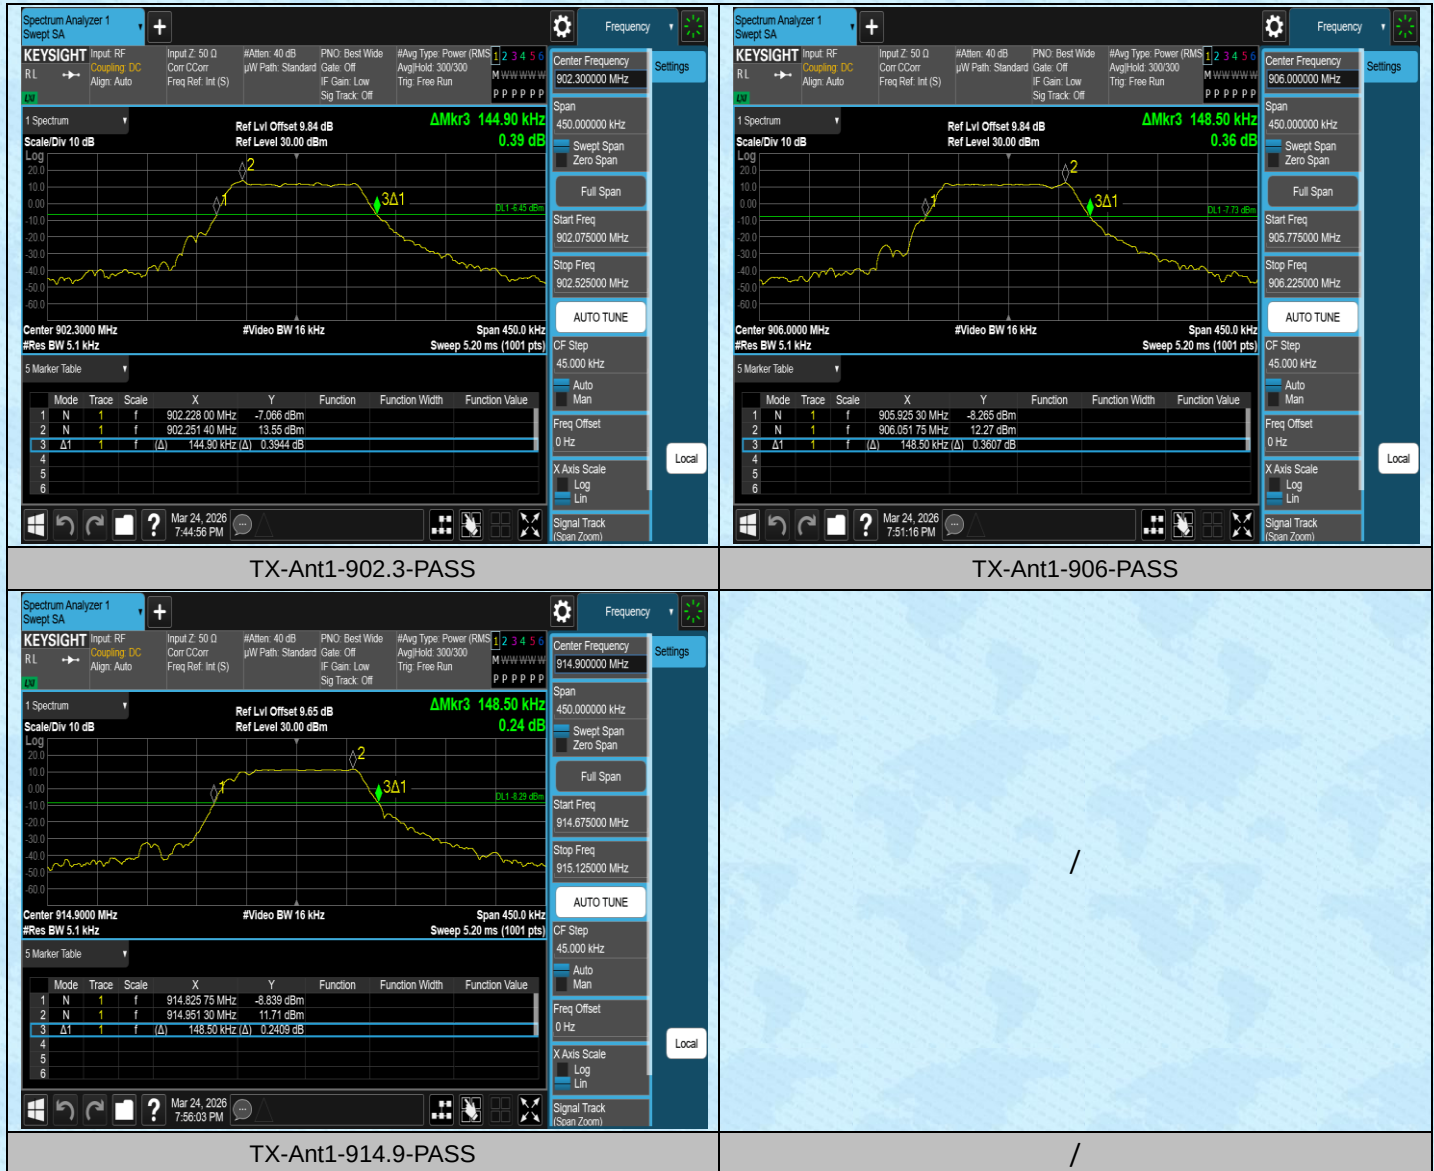


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	902.3	0.12765	902.2357	902.3633	---	---
TX	Ant1	906	0.12803	905.9350	906.0630	---	---
TX	Ant1	914.9	0.12788	914.8351	914.9630	---	---

Test Graphs

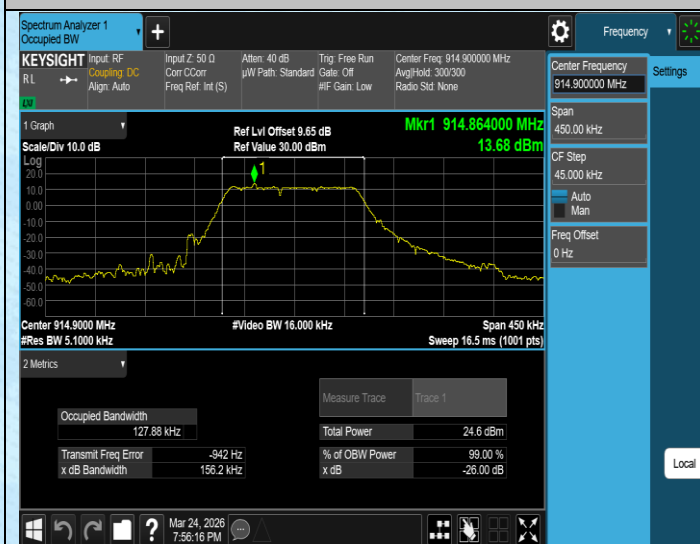


AppendixC: Maximum conducted output power

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	902.3	15.27	≤30	PASS
TX	Ant1	906	15.52	≤30	PASS
TX	Ant1	914.9	14.93	≤30	PASS

Test Graphs

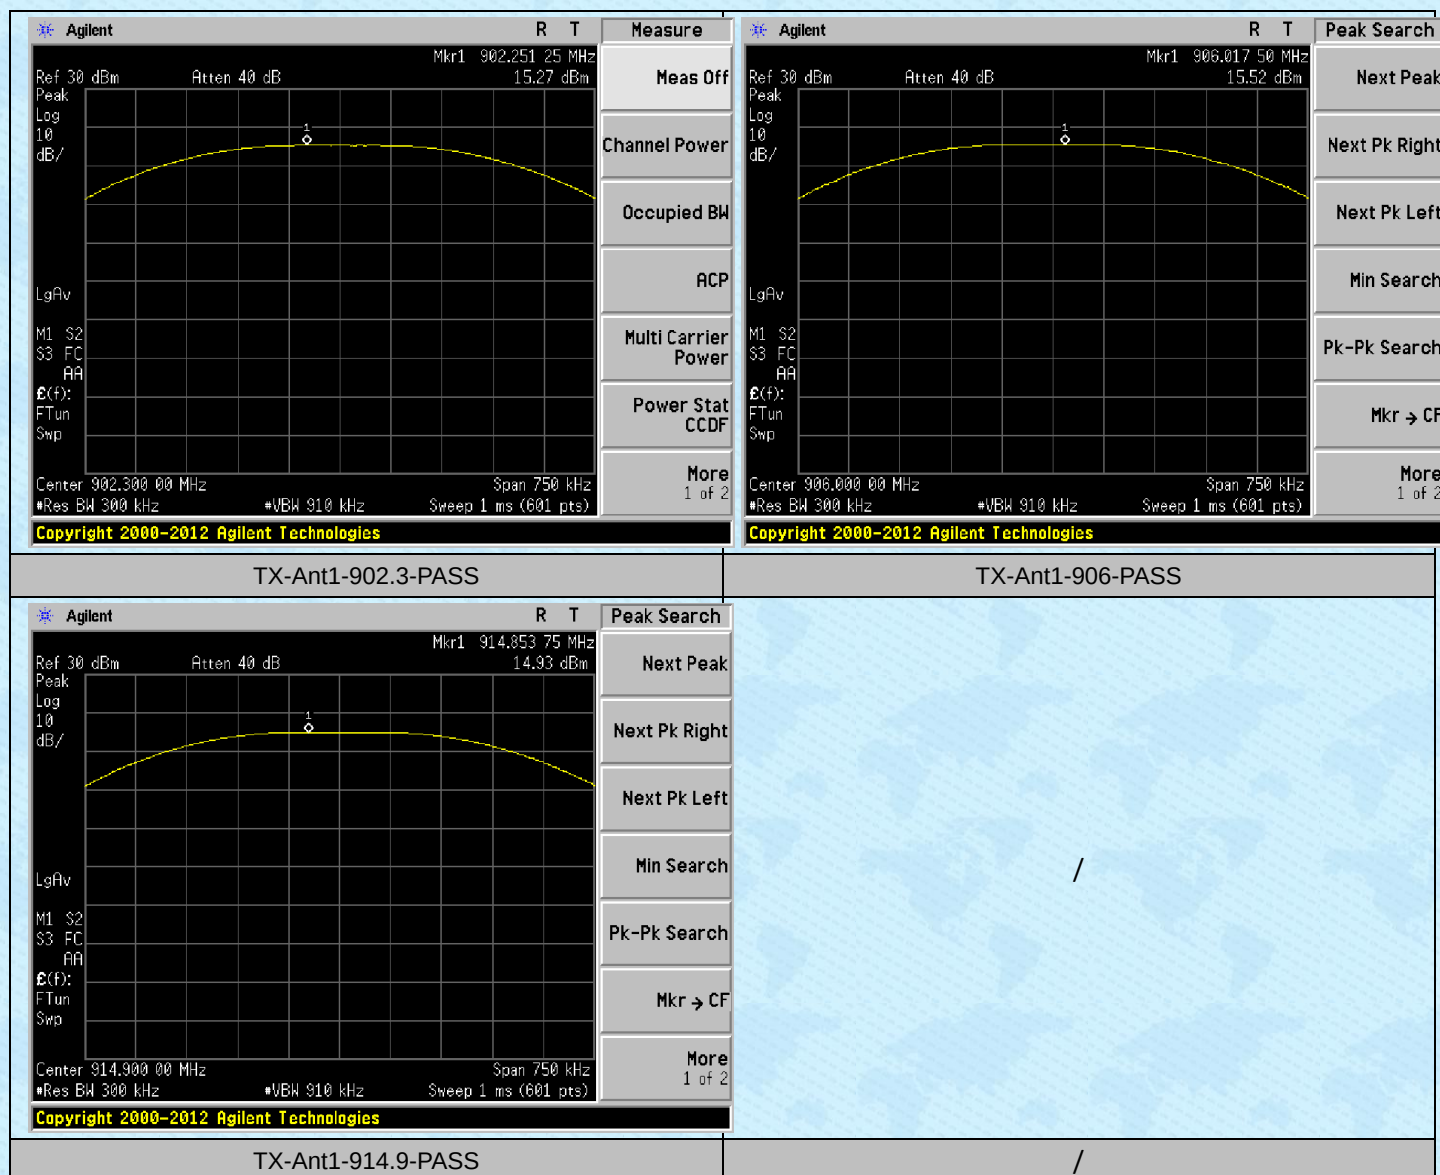


AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_902.3	0.193	≥0.145	PASS
TX	Ant1	Hop_906	0.200	≥0.149	PASS
TX	Ant1	Hop_914.9	0.200	≥0.149	PASS

Test Graphs

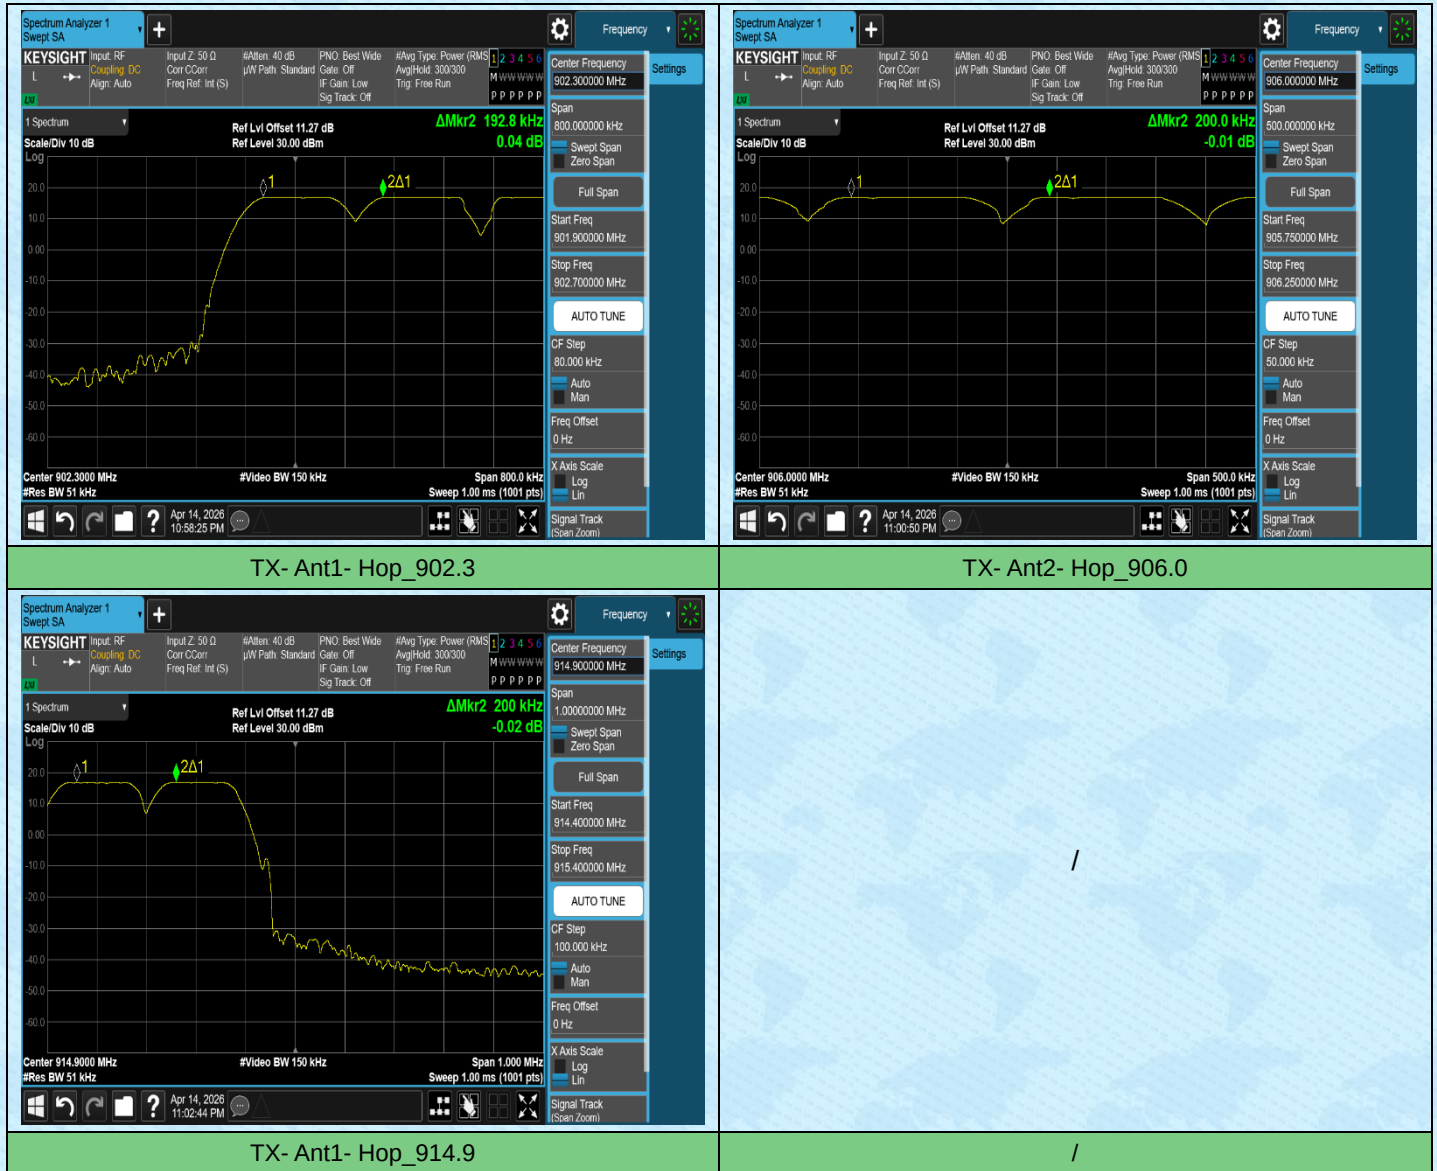



AppendixE: Time of occupancy

Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_902.3	102.6	1	0.103	≤0.4	PASS
TX	Ant2	Hop_906	102.3	2	0.205	≤0.4	PASS
TX	Ant1	Hop_914.9	101.4	1	0.101	≤0.4	PASS

Test Graphs

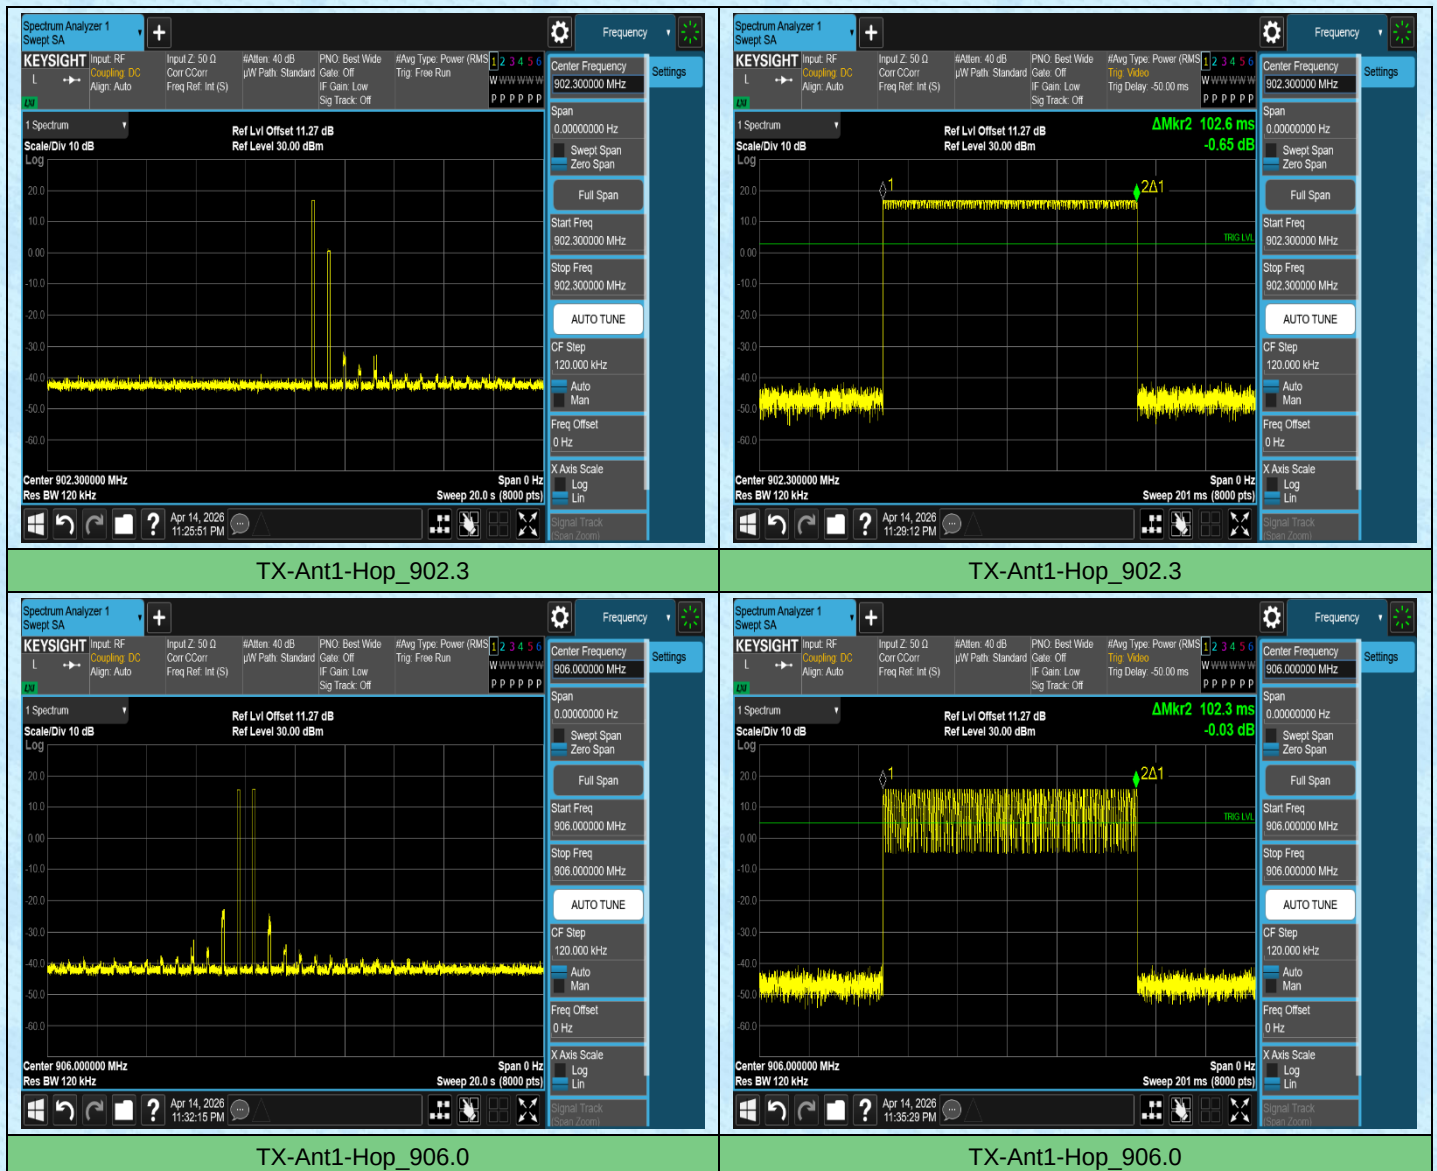

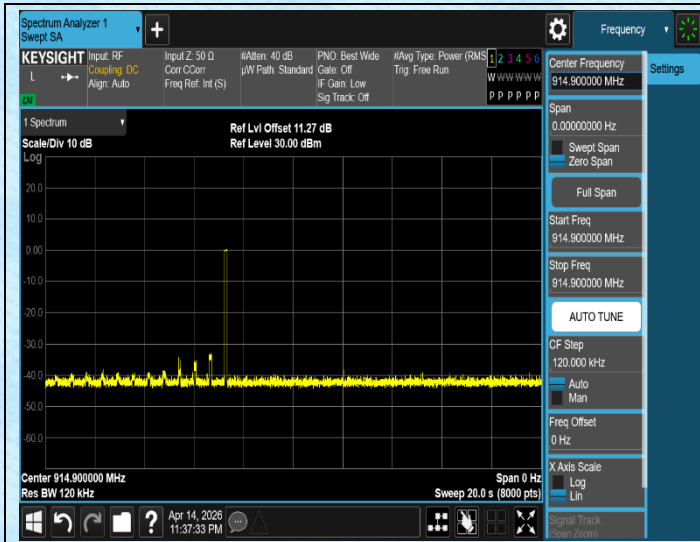

TX-Ant1-Hop_914.9

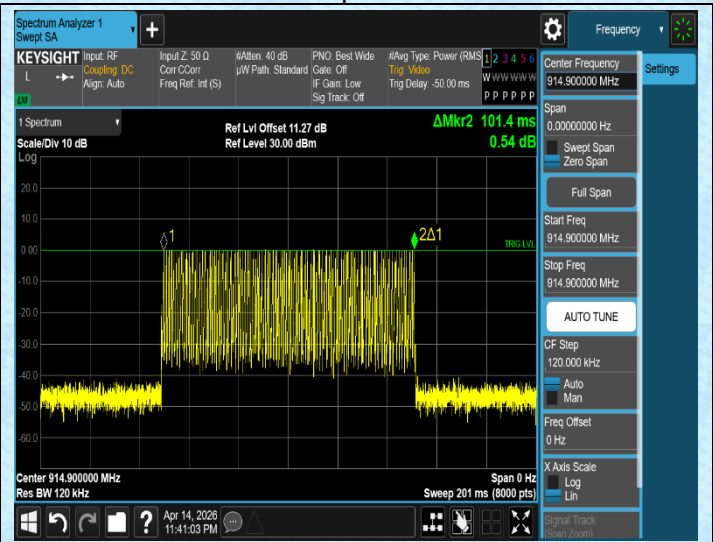


TX-Ant1-Hop_914.9

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	64	≥50	PASS

Test Graphs

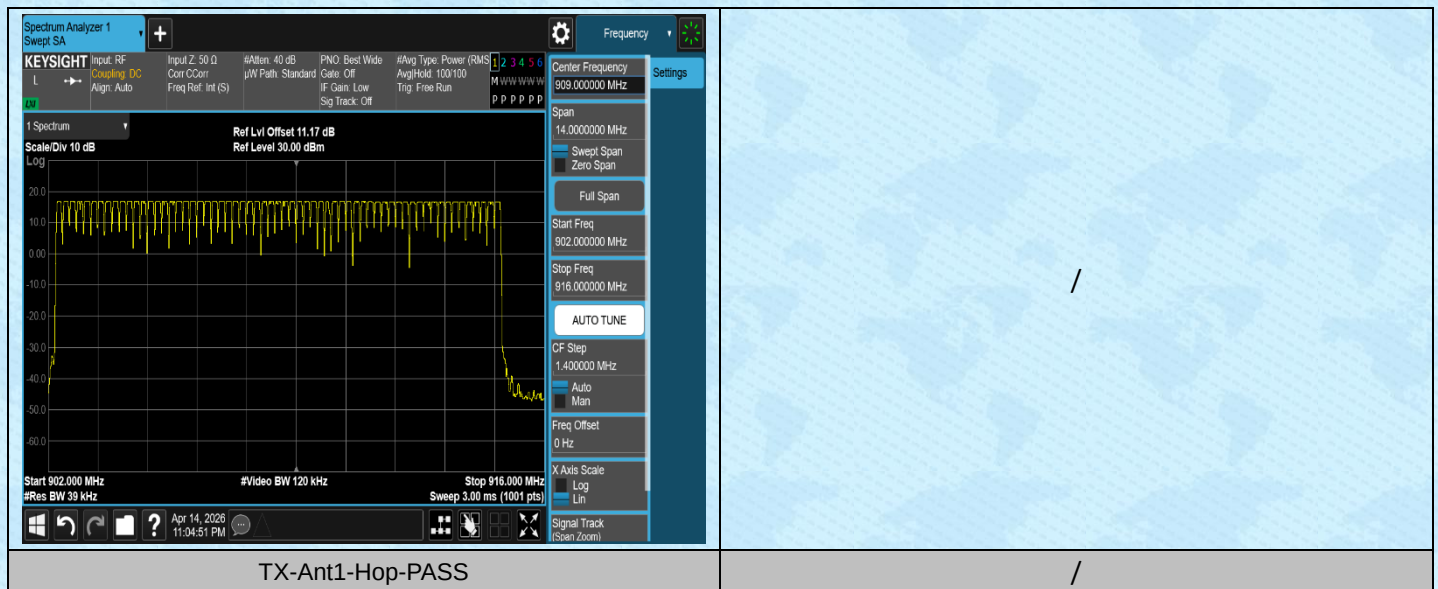


AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	902.3	15.16	-36.01	≤-4.84	PASS
TX	Ant1	High	914.9	14.77	-53.97	≤-5.23	PASS
TX	Ant1	Low	Hop	15.48	-36.24	≤-4.52	PASS
TX	Ant1	High	Hop	15.13	-52.05	≤-4.87	PASS

Test Graphs

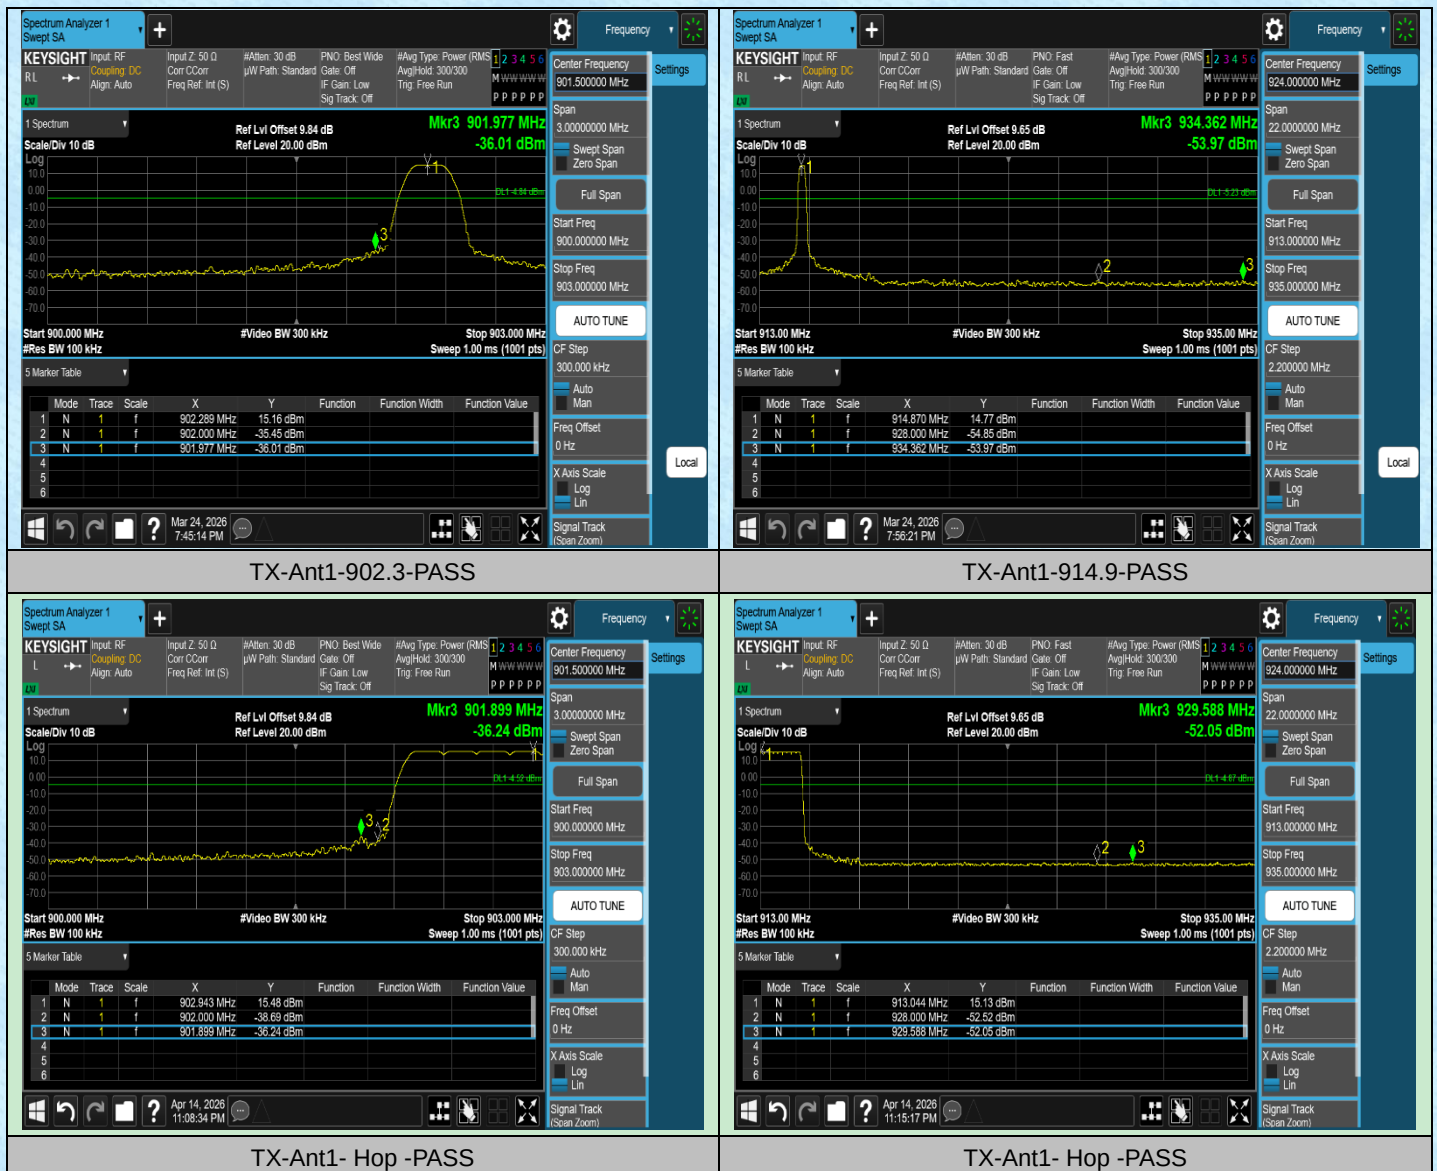



AppendixH:Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	902.3	0~Reference	15.14	15.14	---	PASS
TX	Ant1	902.3	30~1000	15.17	-60.56	≤-4.83	PASS
TX	Ant1	902.3	30~10000	15.14	-52.2	≤-4.86	PASS
TX	Ant1	906	0~Reference	15.11	15.11	---	PASS
TX	Ant1	906	30~10000	15.11	-48.25	≤-4.89	PASS
TX	Ant1	914.9	0~Reference	14.77	14.77	---	PASS
TX	Ant1	914.9	30~10000	14.77	-49.41	≤-5.23	PASS

Test Graphs

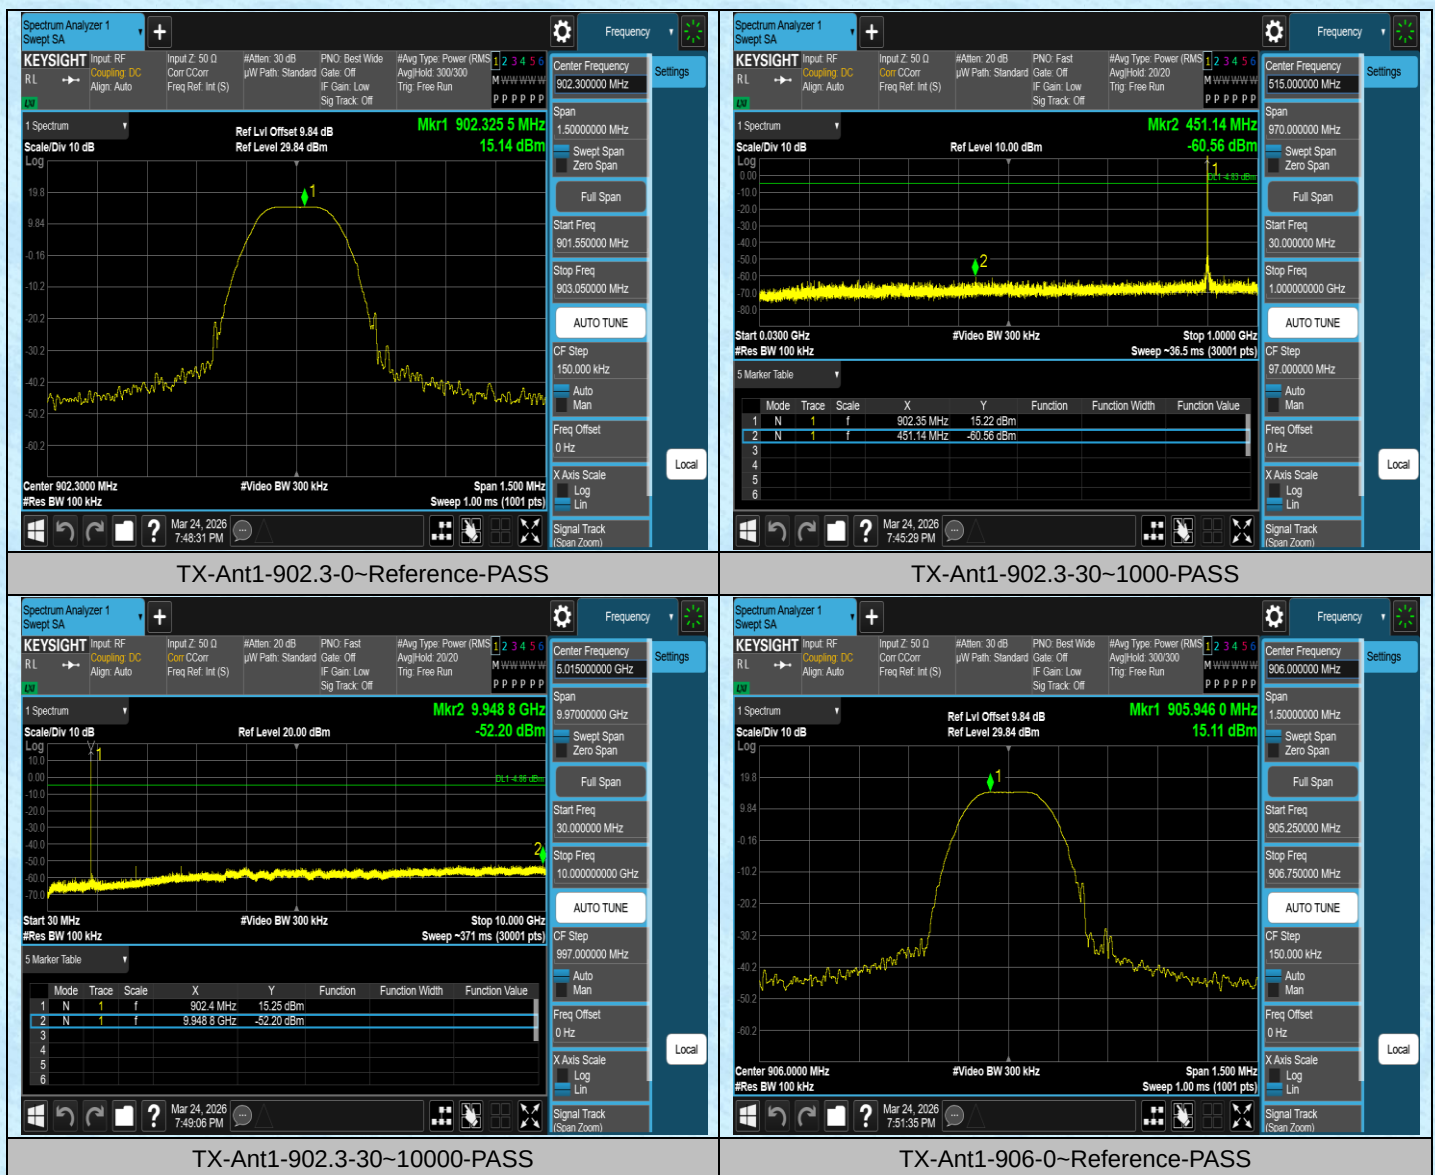

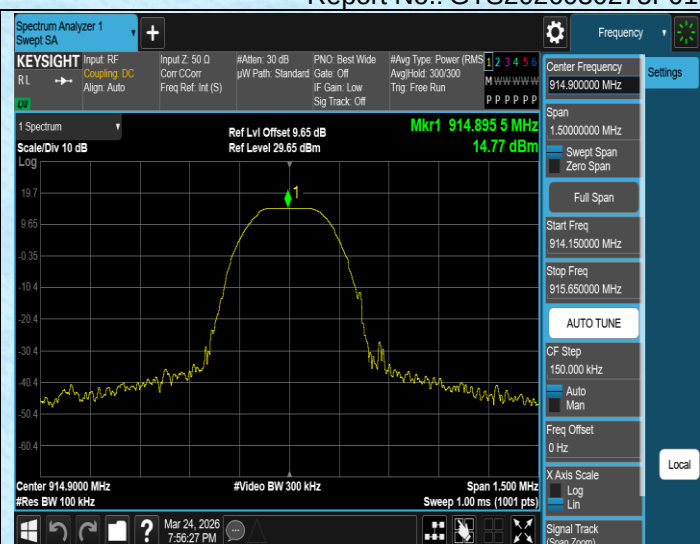

TX-Ant1-906-30~10000-PASS



TX-Ant1-914.9-30~10000-PASS

TX-Ant1-914.9-0~Reference-PASS




AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	902.3	102.34	608.02	16.83	---	---
TX	Ant1	906	103.50	609.00	17.00	---	---
TX	Ant1	914.9	103.50	609.00	17.00	---	---

Test Graphs

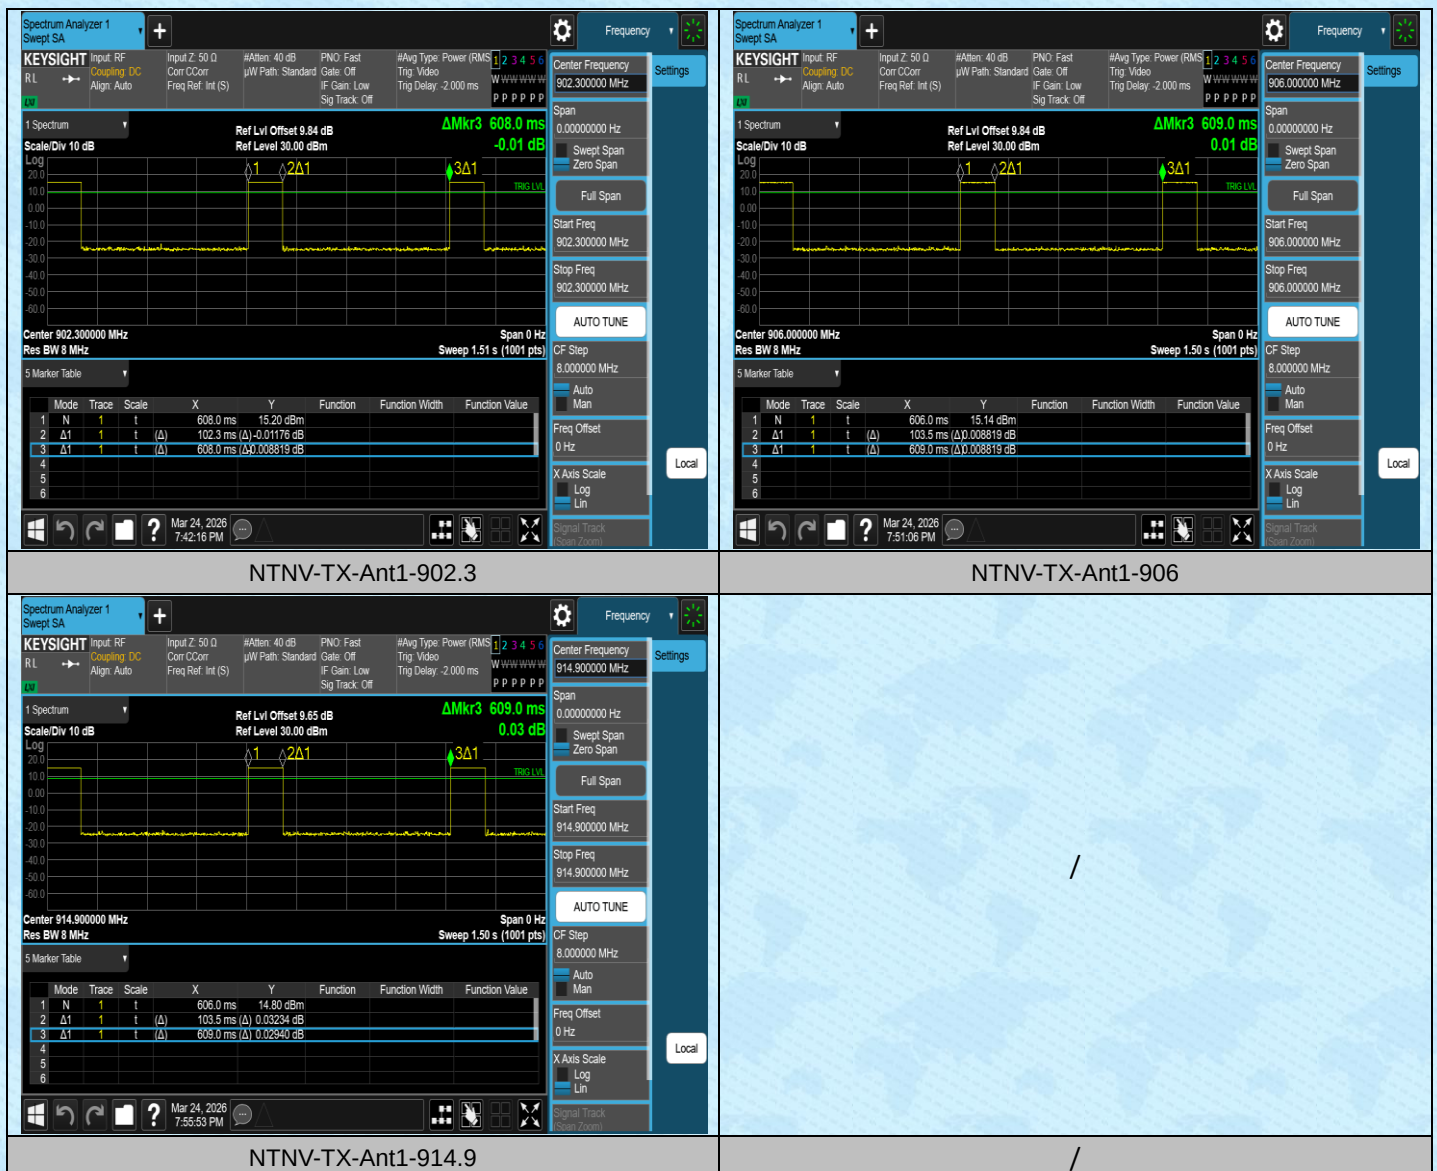

---End---