




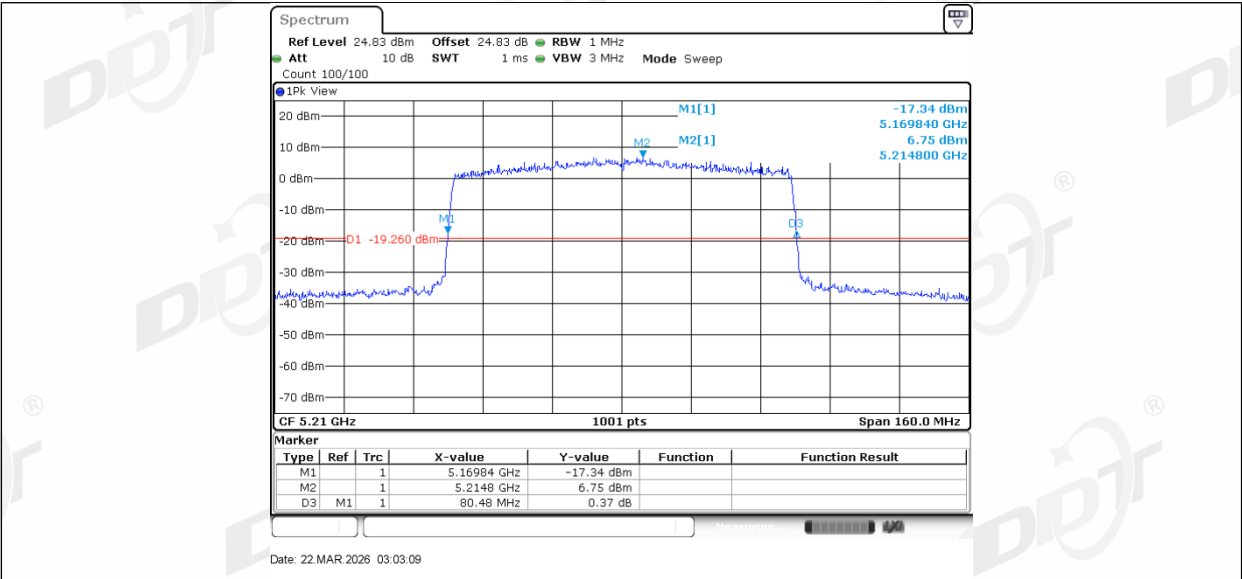


11AX80MIMO_Ant2_5210

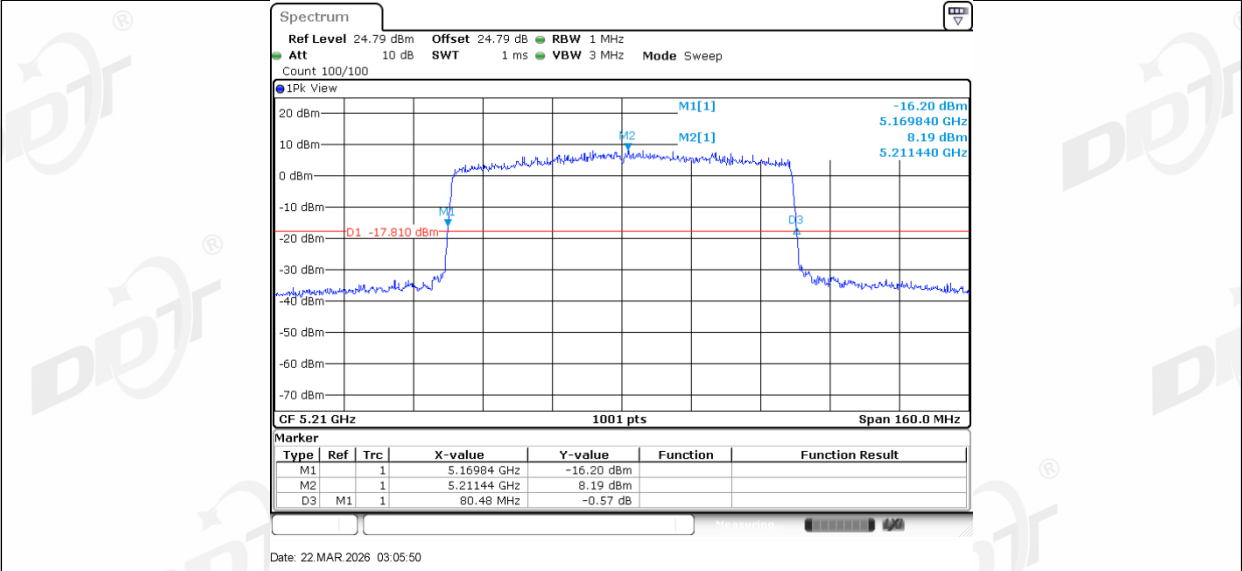


11AX80MIMO_Ant1_5290

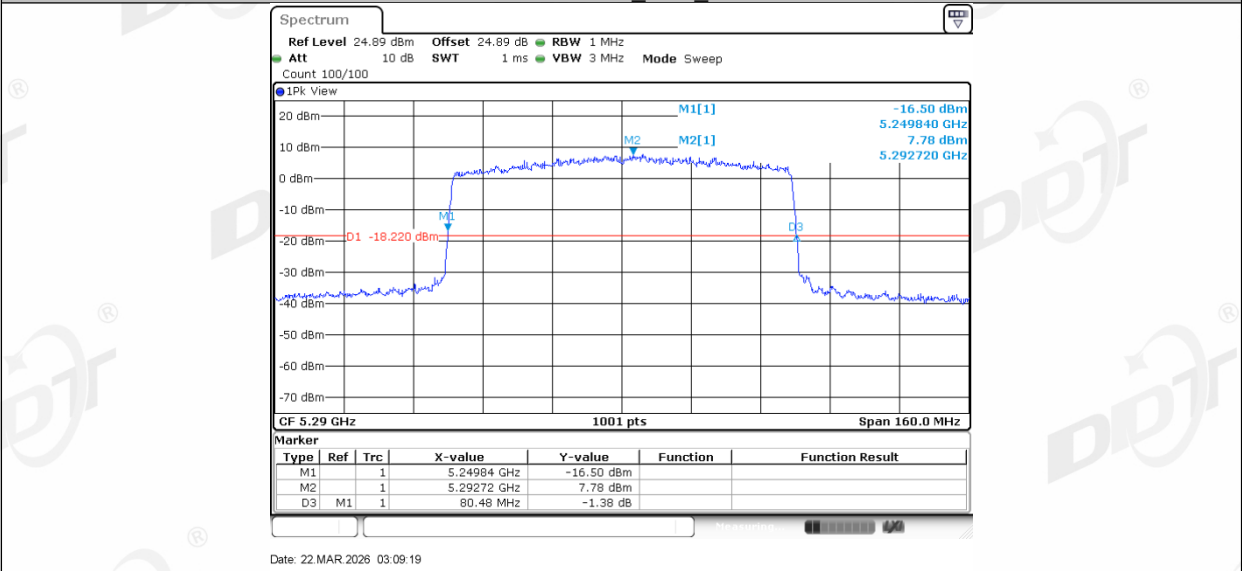


11AX80MIMO_Ant2_5290

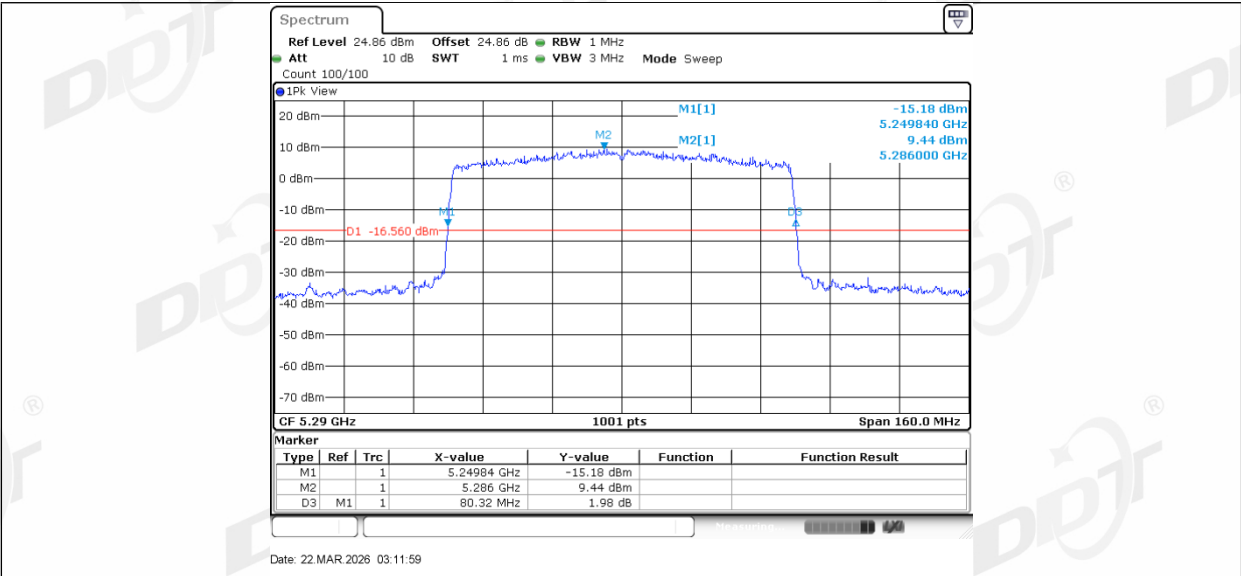


11AX80MIMO_Ant1_5530

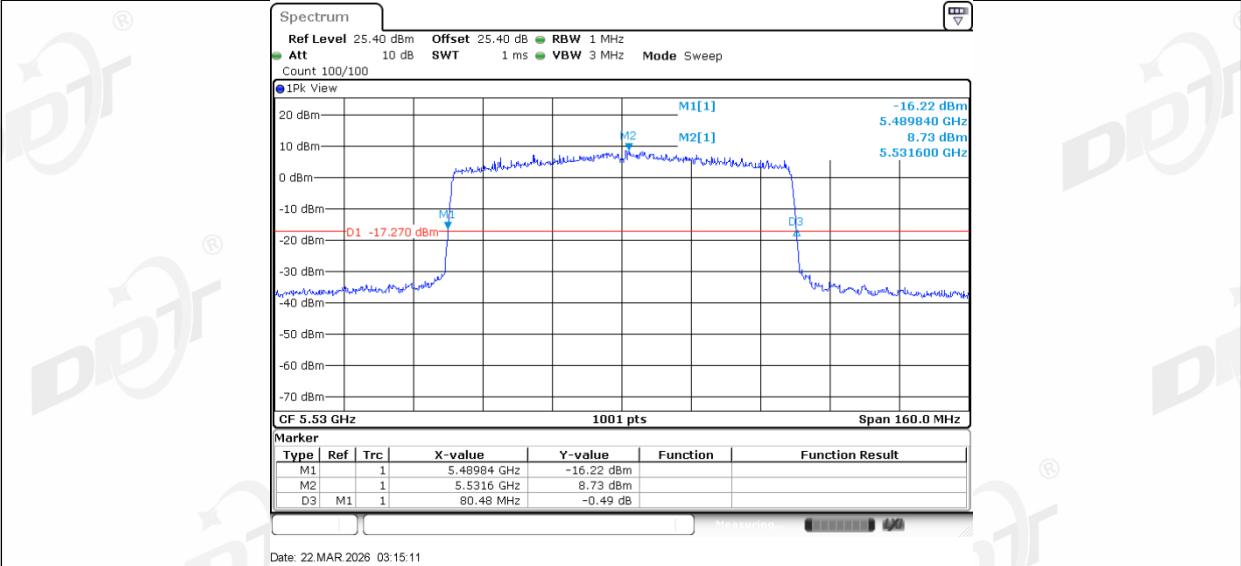


11AX80MIMO_Ant2_5530

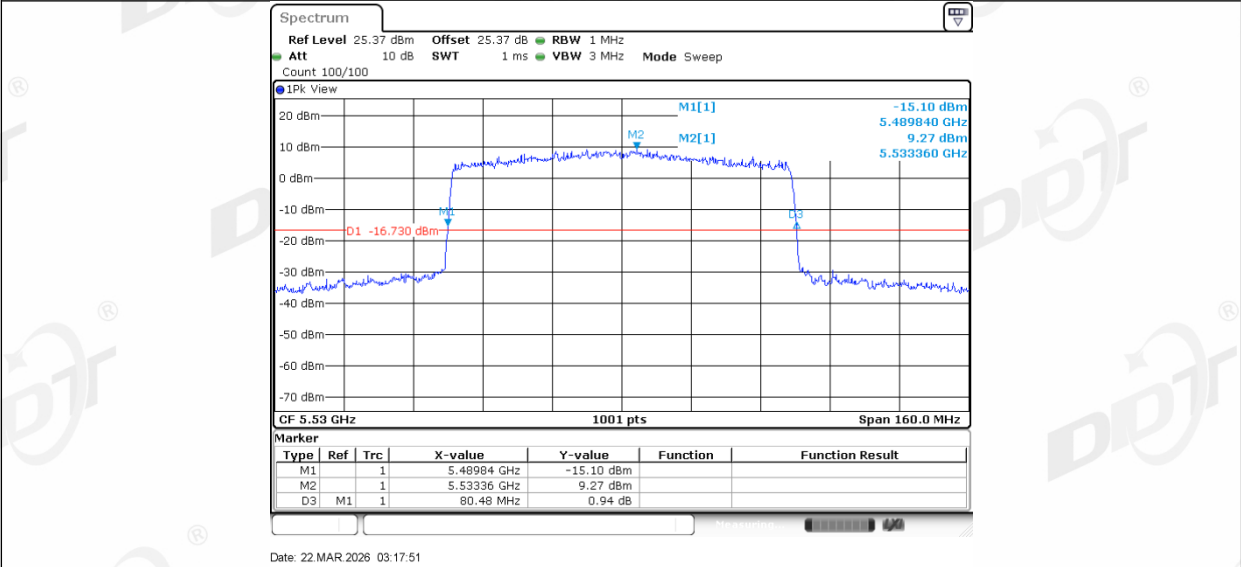


11AX80MIMO_Ant1_5610

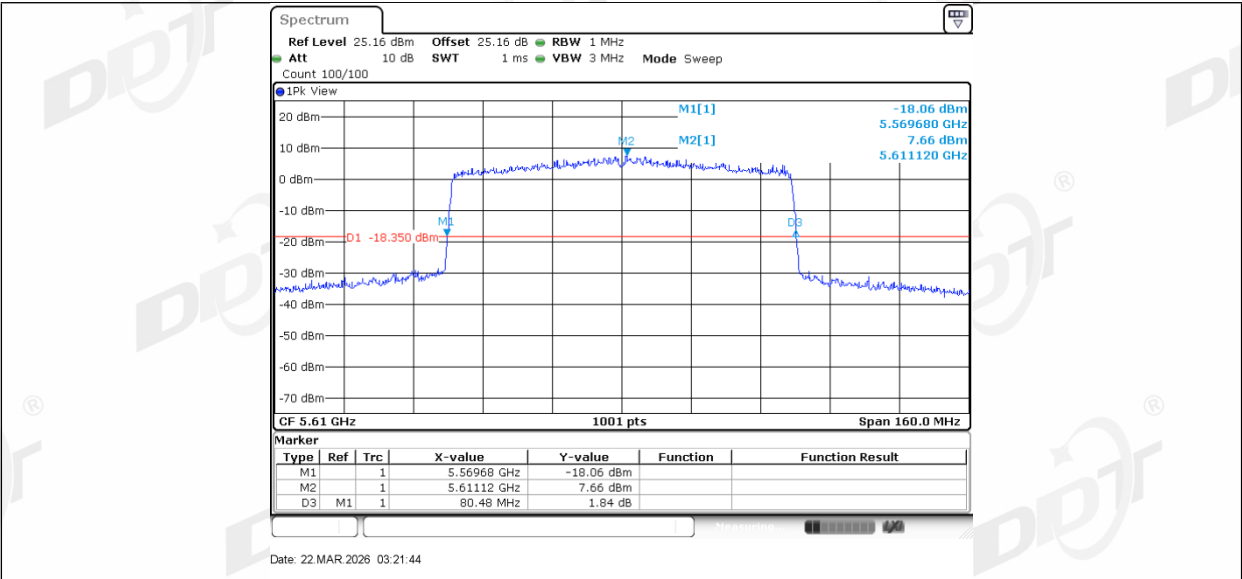


11AX80MIMO_Ant2_5610

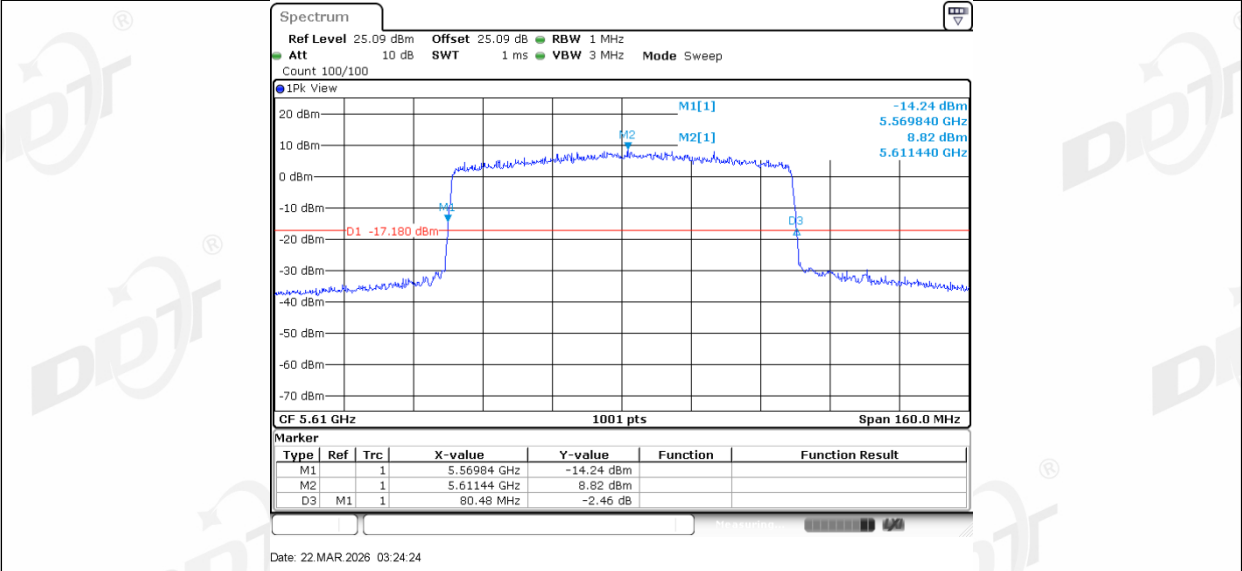

11AX80MIMO_Ant1_5690

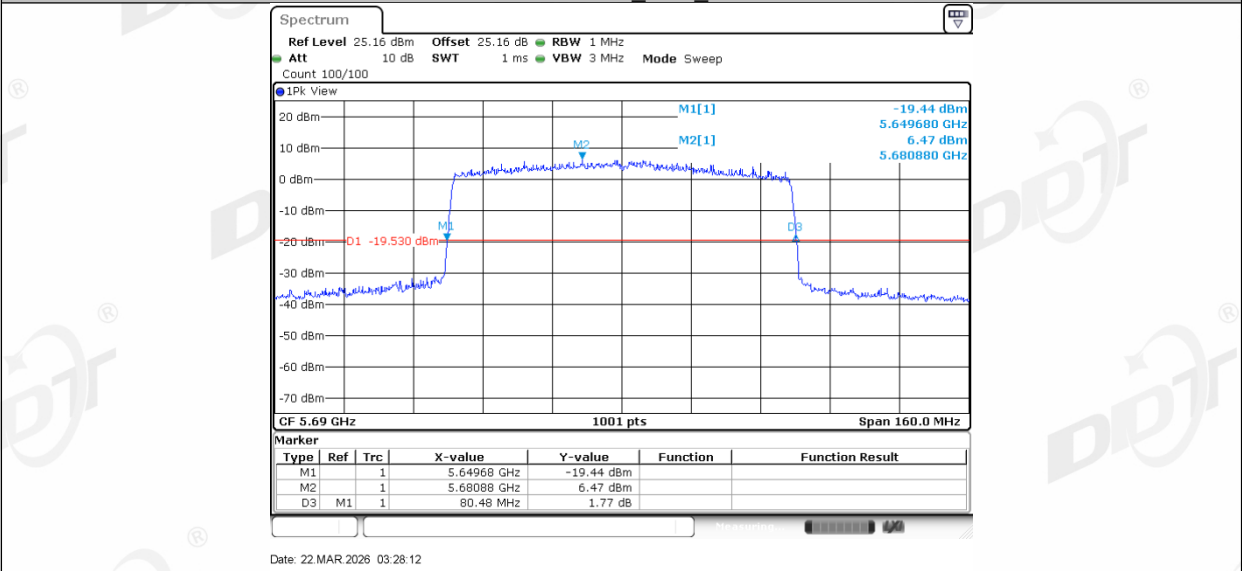


11AX80MIMO_Ant2_5690

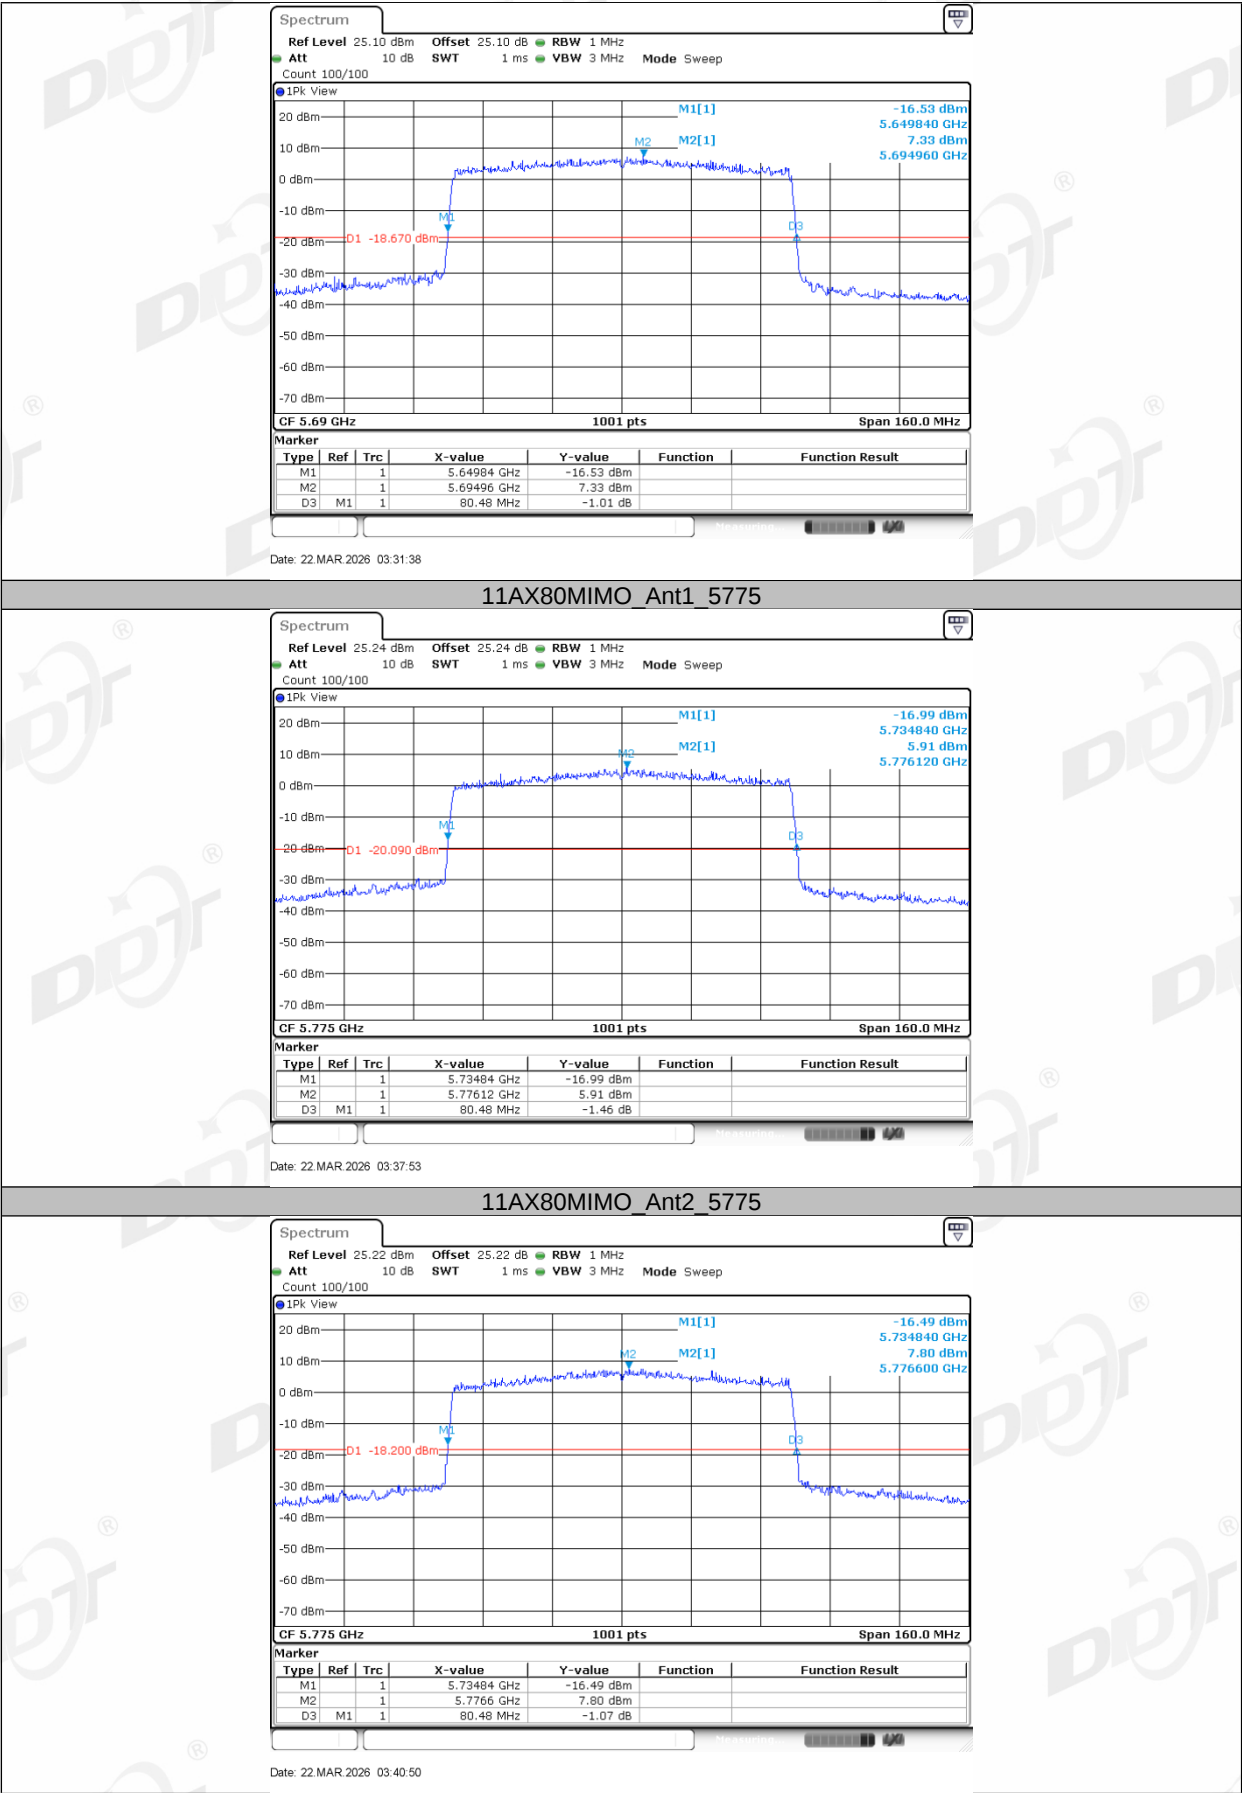

5. 6dB Bandwidth

5.1. Block diagram of test setup

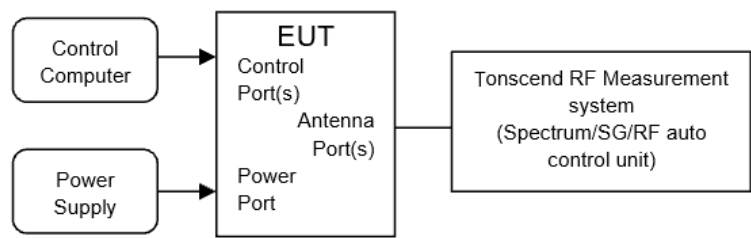

5.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4. Test result B4


Test Engineer:	Lin Guoyuan	Test Site:	RF Measurement System 5#
Ambient Condition:	24.3-26.1°C,43.5-45%RH	Test Date:	2026.03.14-2026.04.02
Test Power Supply:	AC 230V/50Hz	Sample Number:	S26030303-005

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.04	5712.04	5728.08	---	---
	Ant2	5720	15.80	5712.08	5727.88	---	---
	Ant1	5720 UNII-2C	12.96	5712.04	5725	---	---
	Ant2	5720 UNII-2C	12.92	5712.08	5725	---	---
	Ant1	5720 UNII-3	3.08	5725	5728.08	0.5	PASS
	Ant2	5720 UNII-3	2.88	5725	5727.88	0.5	PASS
	Ant1	5745	16.32	5736.80	5753.12	0.5	PASS
	Ant2	5745	16.04	5737.04	5753.08	0.5	PASS
	Ant1	5785	15.92	5777.20	5793.12	0.5	PASS
	Ant2	5785	16.04	5777.08	5793.12	0.5	PASS
	Ant1	5825	16.08	5817.04	5833.12	0.5	PASS
	Ant2	5825	16.24	5816.84	5833.08	0.5	PASS
11N40MIMO	Ant1	5710	35.12	5692.40	5727.52	---	---
	Ant2	5710	35.12	5692.40	5727.52	---	---
	Ant1	5710 UNII-2C	32.6	5692.40	5725	---	---
	Ant2	5710 UNII-2C	32.6	5692.40	5725	---	---
	Ant1	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant2	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant1	5795	35.04	5777.48	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC20MIMO	Ant1	5720	16.32	5712.04	5728.36	---	---
	Ant2	5720	17.52	5711.20	5728.72	---	---
	Ant1	5720 UNII-2C	12.96	5712.04	5725	---	---
	Ant2	5720 UNII-2C	13.8	5711.20	5725	---	---
	Ant1	5720 UNII-3	3.36	5725	5728.36	0.5	PASS
	Ant2	5720 UNII-3	3.72	5725	5728.72	0.5	PASS
	Ant1	5745	17.04	5736.44	5753.48	0.5	PASS
	Ant2	5745	17.56	5736.16	5753.72	0.5	PASS
	Ant1	5785	16.44	5777.04	5793.48	0.5	PASS
	Ant2	5785	17.56	5776.16	5793.72	0.5	PASS
	Ant1	5825	16.68	5816.80	5833.48	0.5	PASS
	Ant2	5825	17.60	5816.16	5833.76	0.5	PASS
11AC40MIMO	Ant1	5710	35.12	5692.40	5727.52	---	---
	Ant2	5710	35.12	5692.40	5727.52	---	---
	Ant1	5710 UNII-2C	32.6	5692.40	5725	---	---
	Ant2	5710 UNII-2C	32.6	5692.40	5725	---	---
	Ant1	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant2	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant1	5795	35.04	5777.48	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC80MIMO	Ant1	5690	75.20	5652.40	5727.60	---	---
	Ant2	5690	75.20	5652.40	5727.60	---	---
	Ant1	5690 UNII-2C	72.6	5652.40	5725	---	---
	Ant2	5690 UNII-2C	72.6	5652.40	5725	---	---
	Ant1	5690 UNII-3	2.6	5725	5727.60	0.5	PASS
	Ant2	5690 UNII-3	2.6	5725	5727.60	0.5	PASS
	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS
11AX20MIMO	Ant2	5775	73.92	5738.68	5812.60	0.5	PASS
	Ant1	5720	18.56	5710.76	5729.32	---	---
	Ant2	5720	18.92	5710.56	5729.48	---	---
	Ant1	5720 UNII-2C	14.24	5710.76	5725	---	---


	Ant2	5720 UNII-2C	14.44	5710.56	5725	---	---
	Ant1	5720 UNII-3	4.32	5725	5729.32	0.5	PASS
	Ant2	5720 UNII-3	4.48	5725	5729.48	0.5	PASS
	Ant1	5745	18.72	5735.68	5754.40	0.5	PASS
	Ant2	5745	18.68	5735.64	5754.32	0.5	PASS
	Ant1	5785	18.80	5775.56	5794.36	0.5	PASS
	Ant2	5785	18.92	5775.44	5794.36	0.5	PASS
	Ant1	5825	18.84	5815.56	5834.40	0.5	PASS
11AX40MIM O	Ant2	5825	18.84	5815.52	5834.36	0.5	PASS
	Ant1	5710	35.36	5692.16	5727.52	---	---
	Ant2	5710	35.12	5692.40	5727.52	---	---
	Ant1	5710 UNII-2C	32.84	5692.16	5725	---	---
	Ant2	5710 UNII-2C	32.6	5692.40	5725	---	---
	Ant1	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant2	5710 UNII-3	2.52	5725	5727.52	0.5	PASS
	Ant1	5755	36.88	5736.52	5773.40	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	36.00	5777.40	5813.40	0.5	PASS
11AX80MIM O	Ant2	5795	35.12	5777.40	5812.52	0.5	PASS
	Ant1	5690	75.84	5651.92	5727.76	---	---
	Ant2	5690	75.68	5651.92	5727.60	---	---
	Ant1	5690 UNII-2C	73.08	5651.92	5725	---	---
	Ant2	5690 UNII-2C	73.08	5651.92	5725	---	---
	Ant1	5690 UNII-3	2.76	5725	5727.76	0.5	PASS
	Ant2	5690 UNII-3	2.6	5725	5727.60	0.5	PASS
	Ant1	5775	75.52	5737.40	5812.92	0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	0.5	PASS

5.5. Test graphs B4




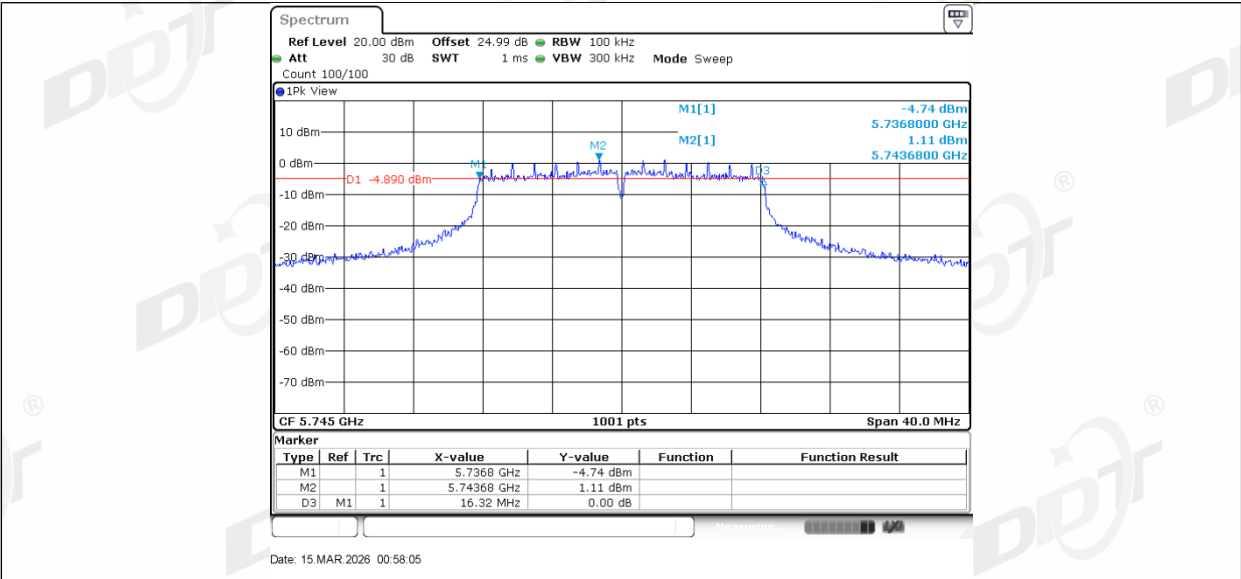


11A_Ant2_5745

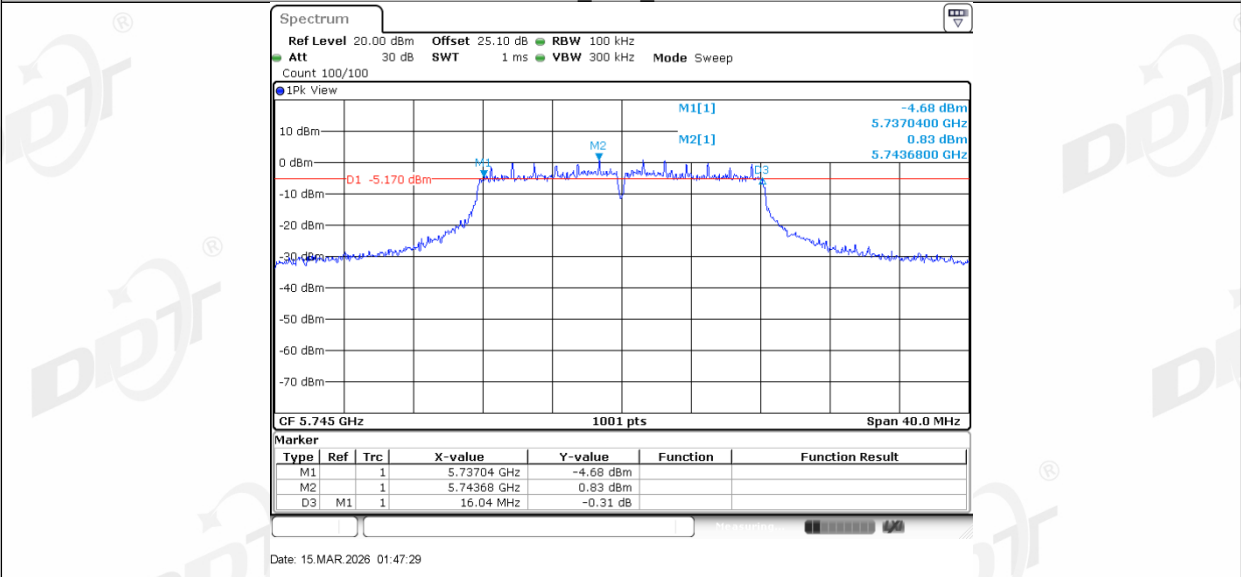


11A_Ant1_5785

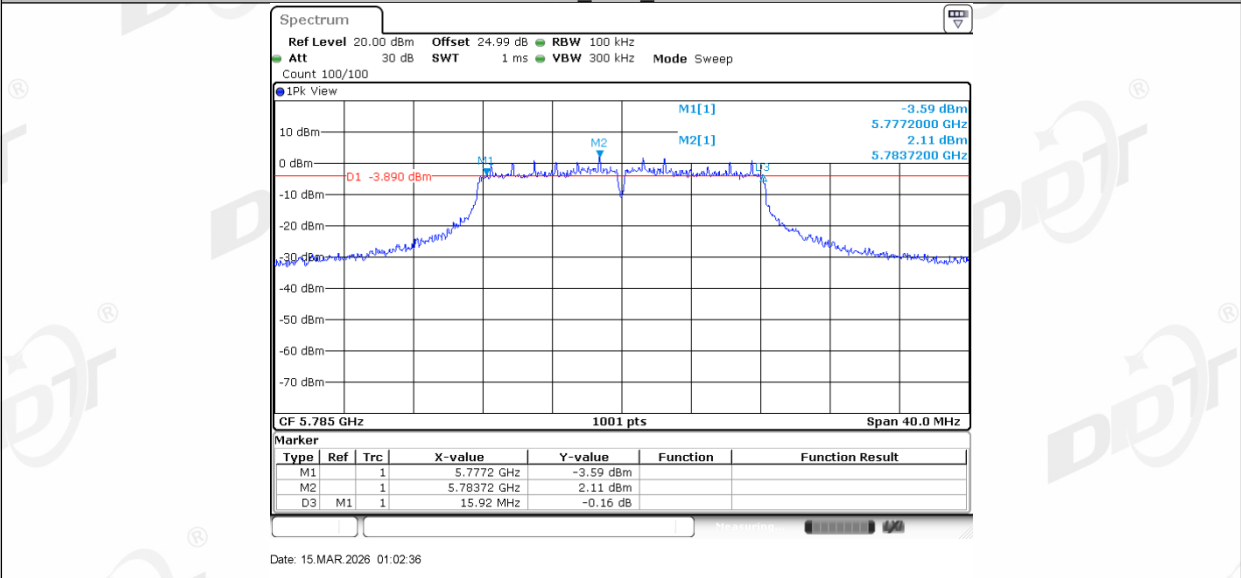


11A_Ant2_5785

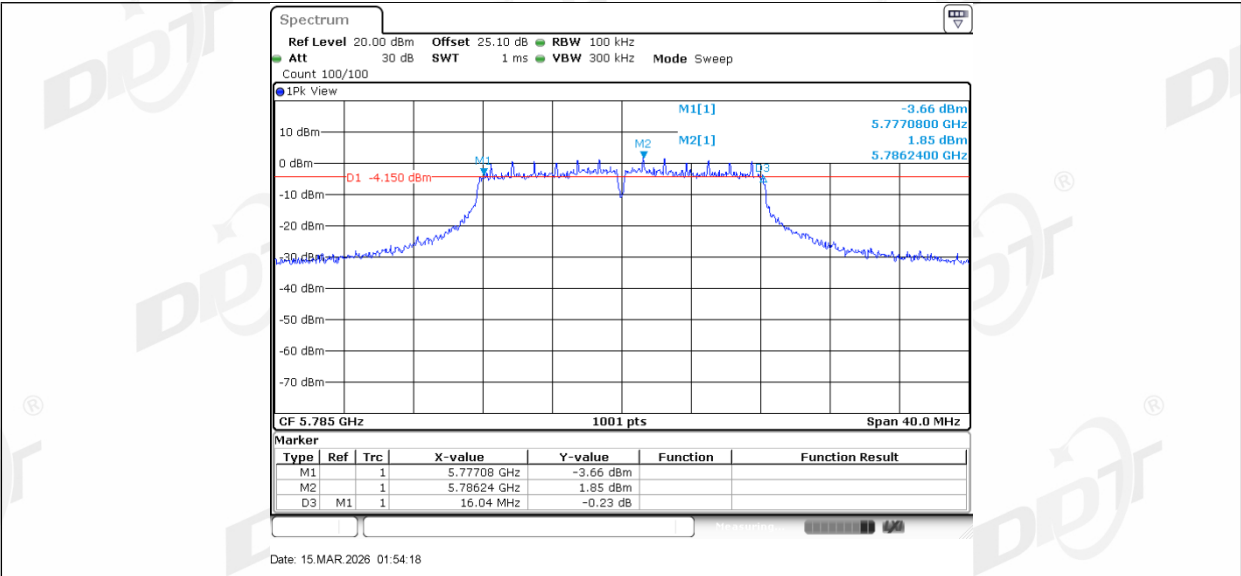


11A_Ant1_5825

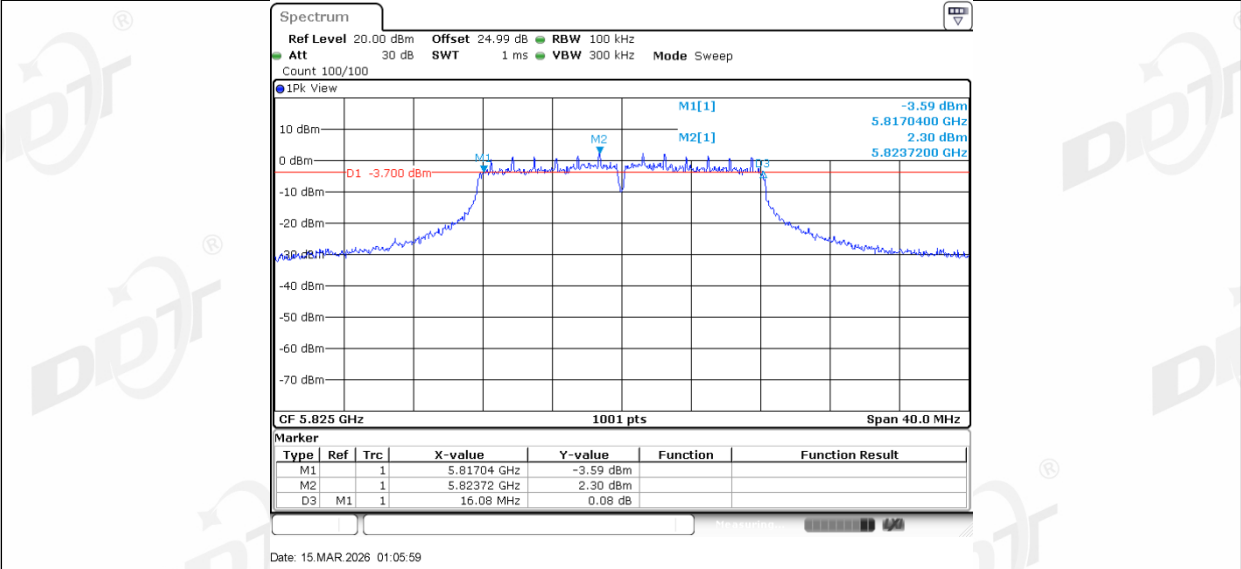


11A_Ant2_5825

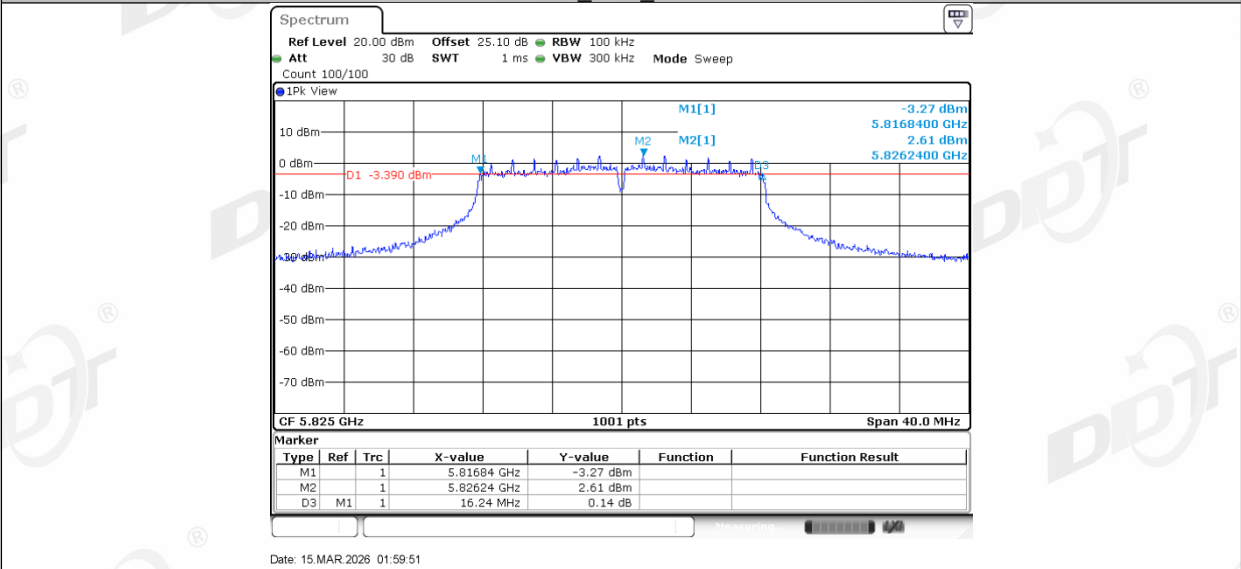


11N40MIMO_Ant1_5710

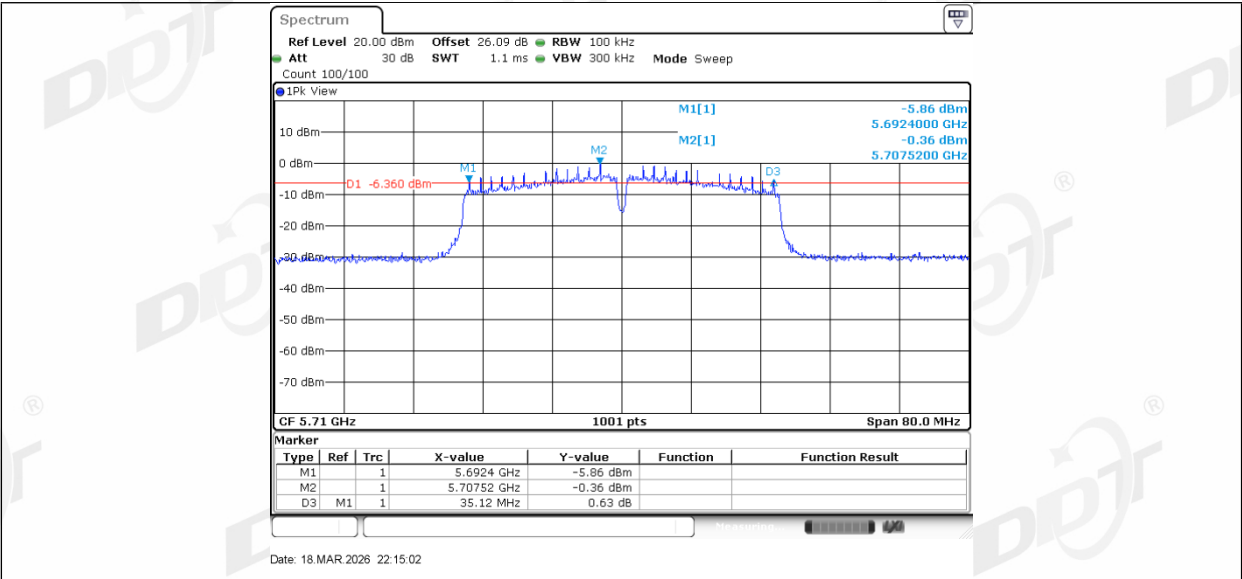


11N40MIMO_Ant2_5710

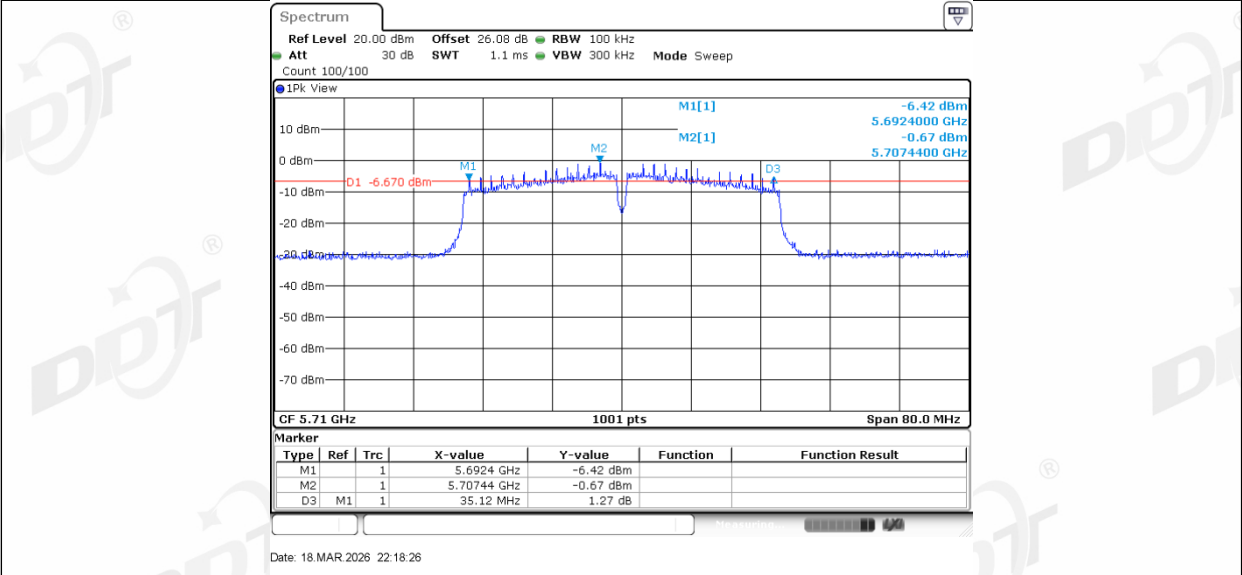


11N40MIMO_Ant1_5755

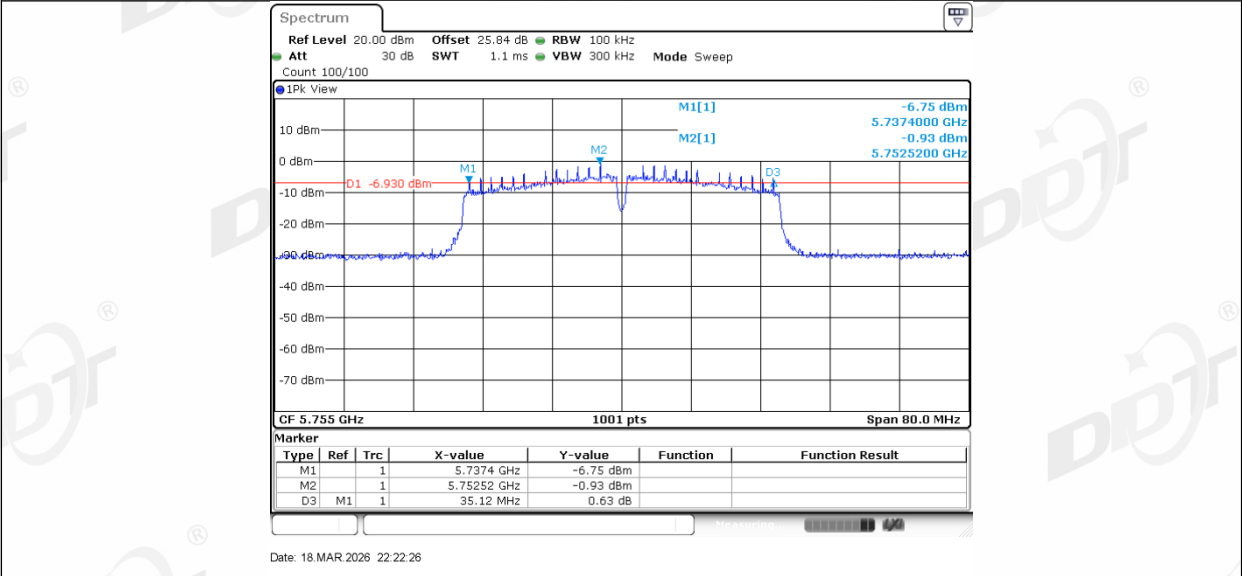


11N40MIMO_Ant2_5755

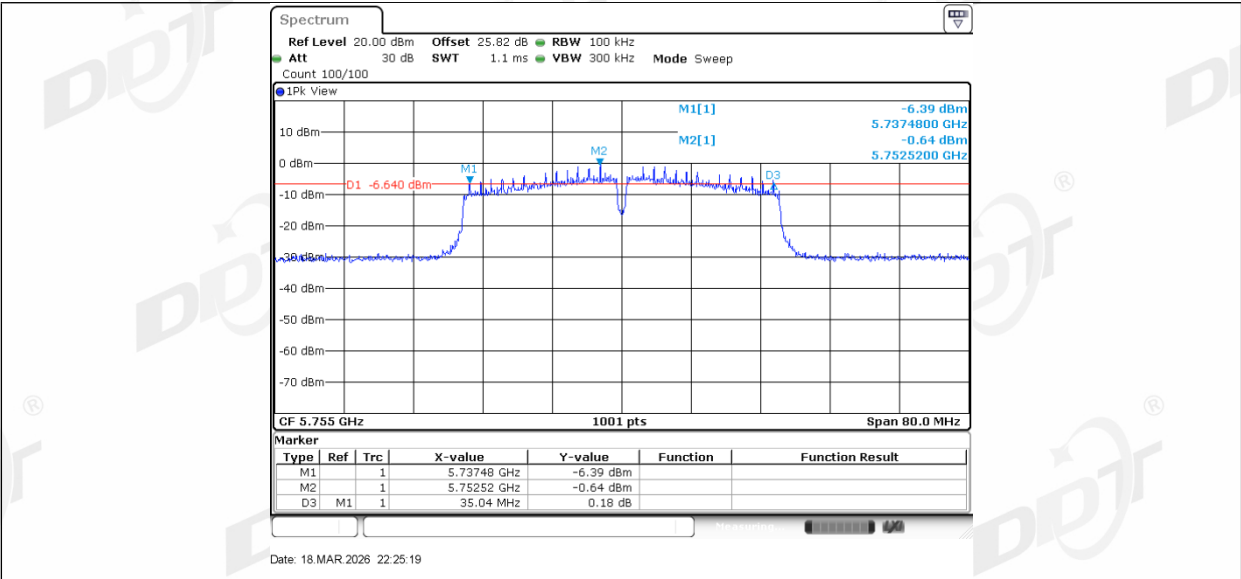


11N40MIMO_Ant1_5795

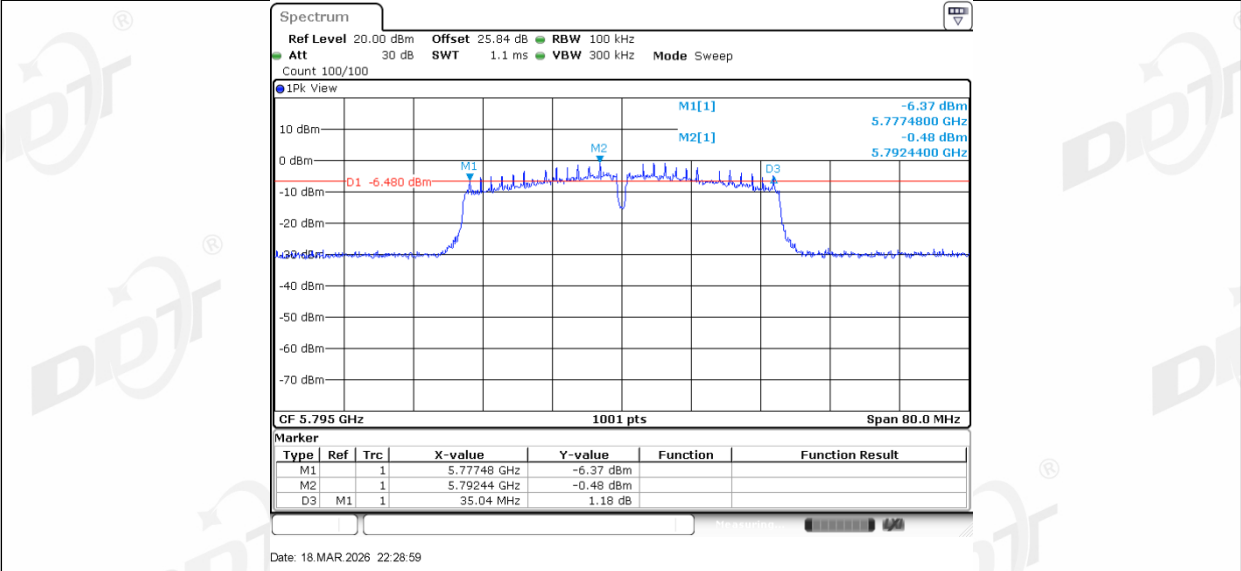


11N40MIMO_Ant2_5795

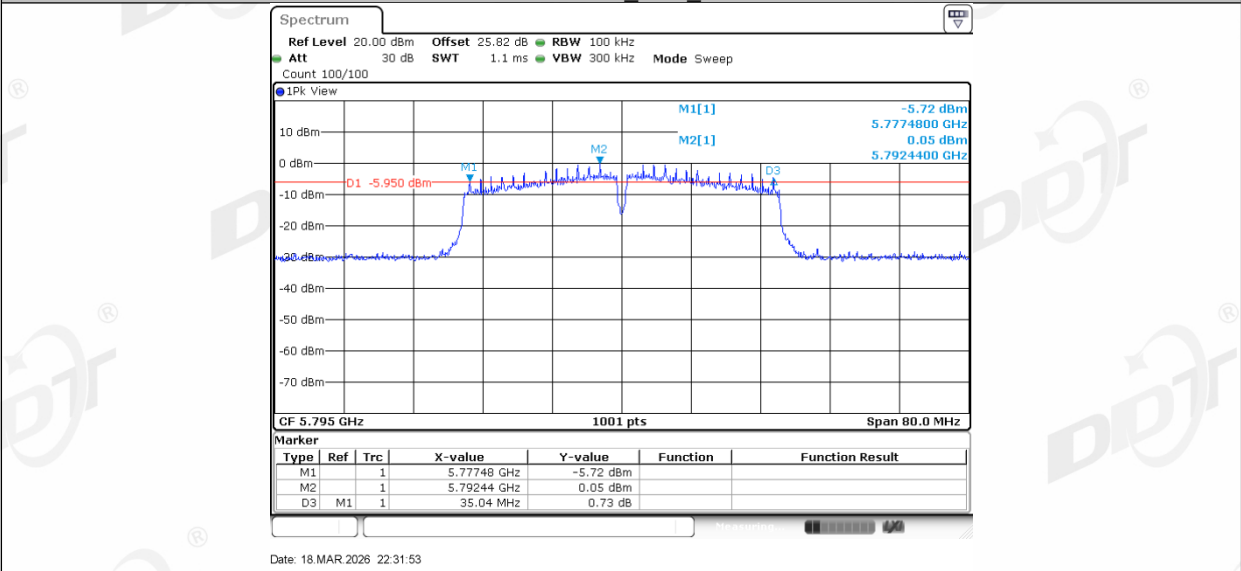


11AC20MIMO_Ant1_5720

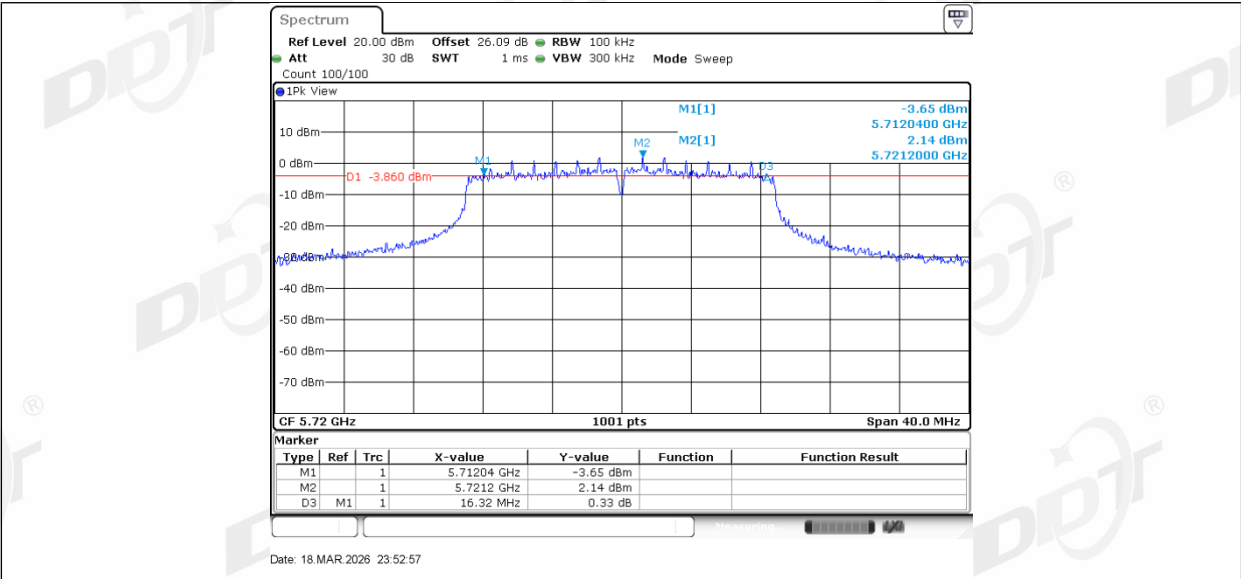


11AC20MIMO_Ant2_5720

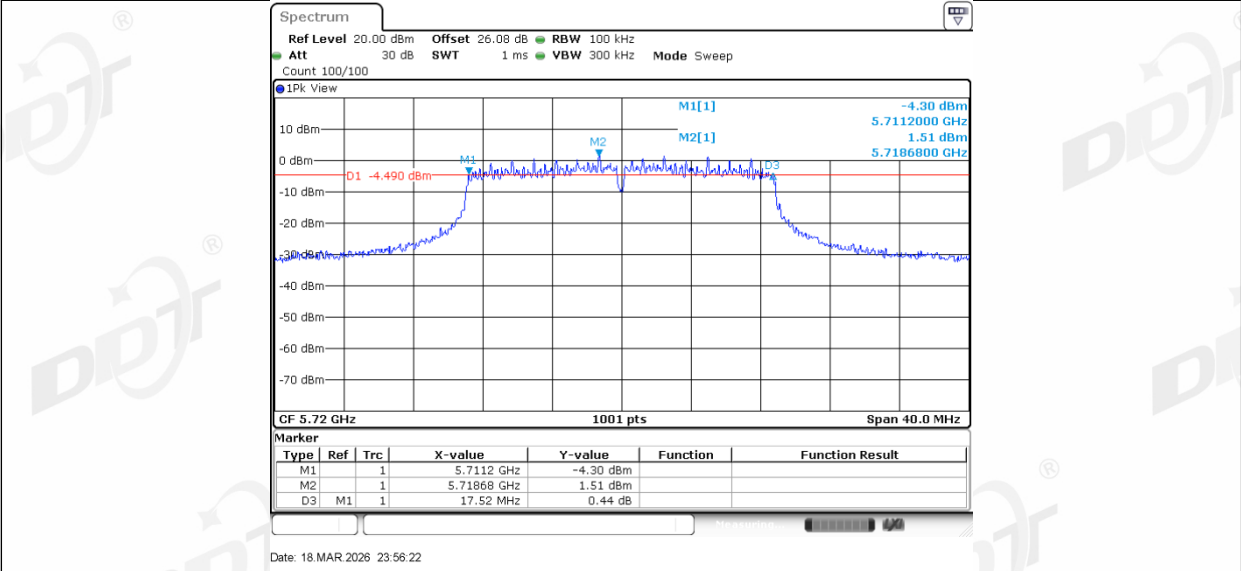


11AC20MIMO_Ant1_5745

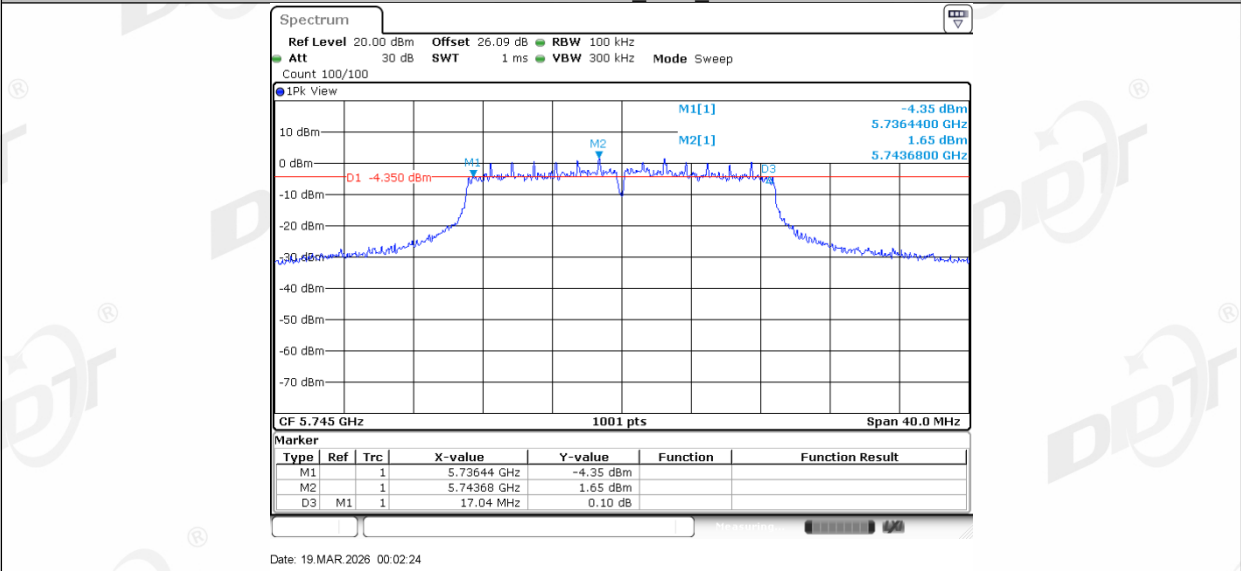


11AC20MIMO_Ant2_5745

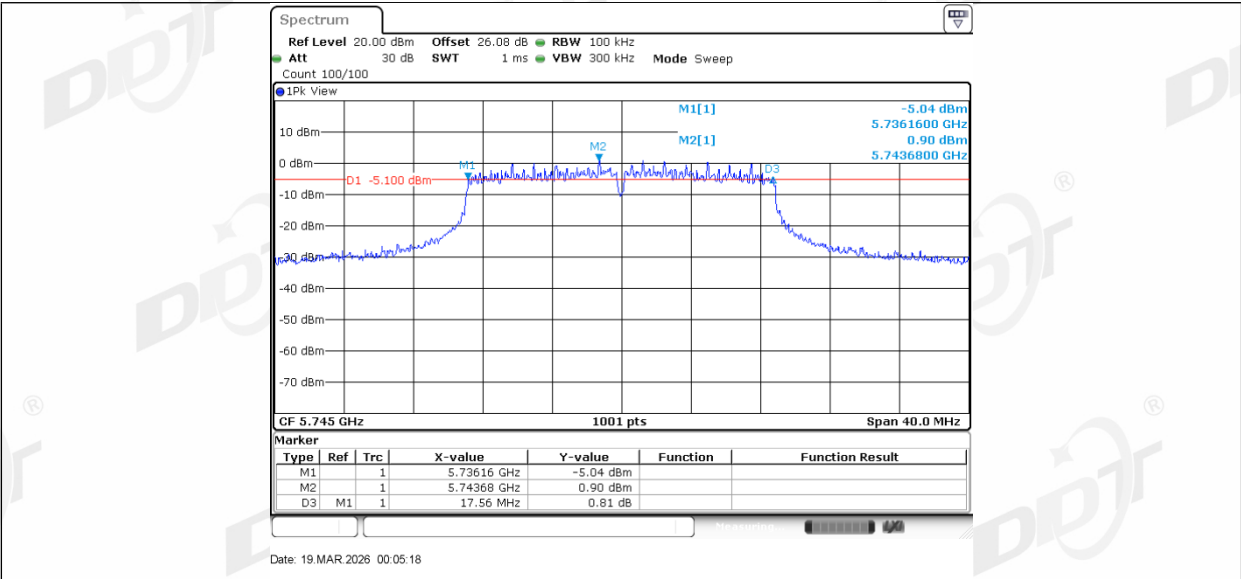


11AC20MIMO_Ant1_5785

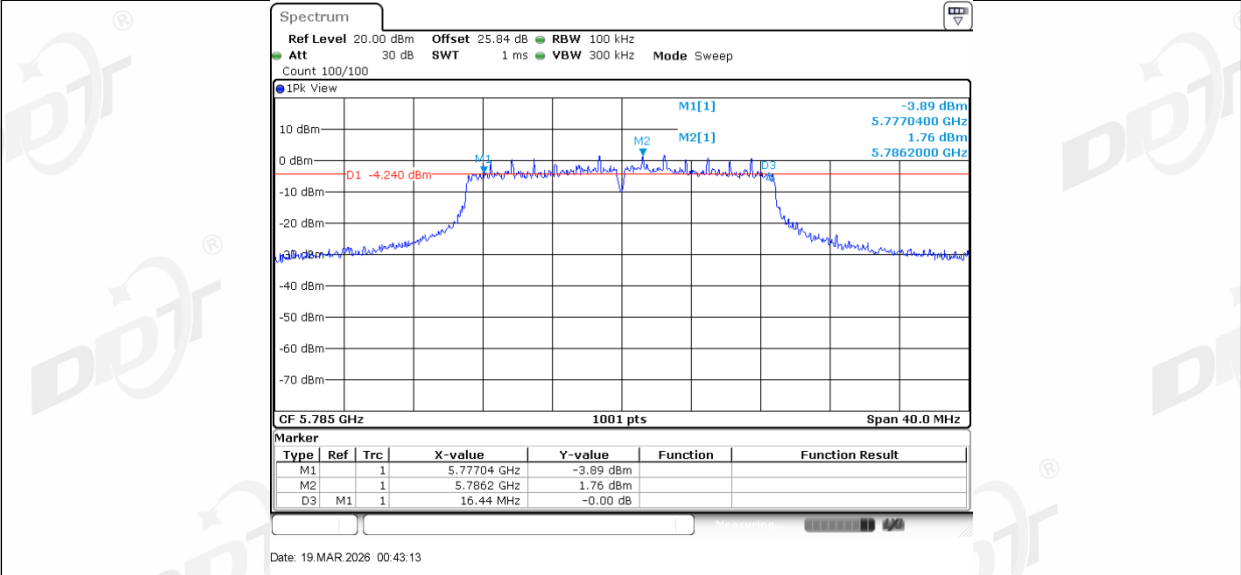


11AC20MIMO_Ant2_5785

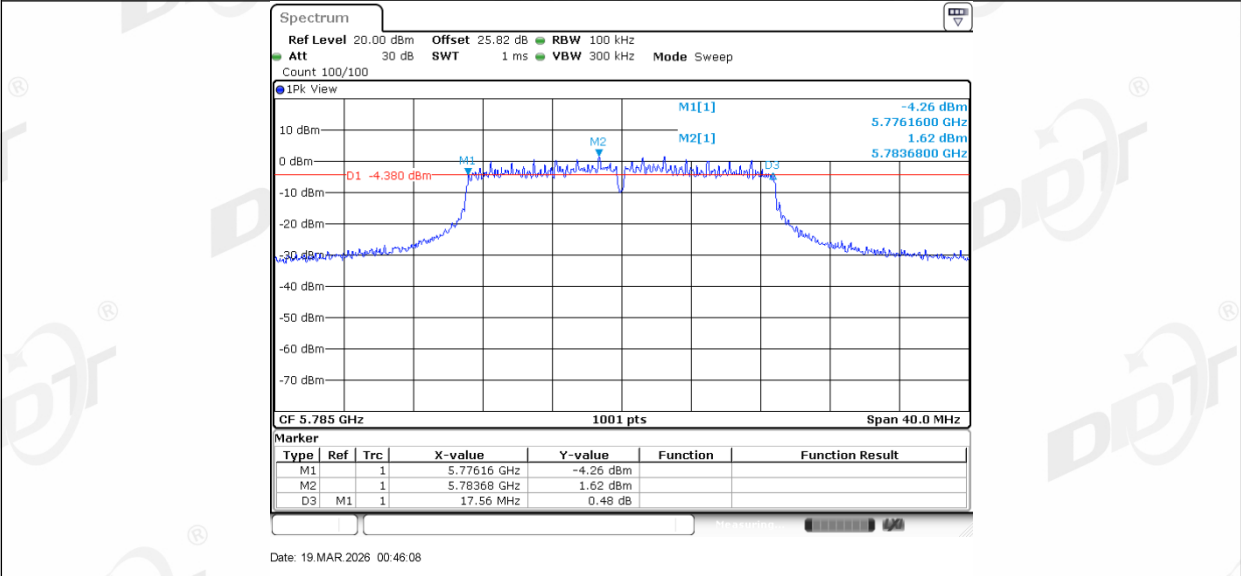


11AC20MIMO_Ant1_5825

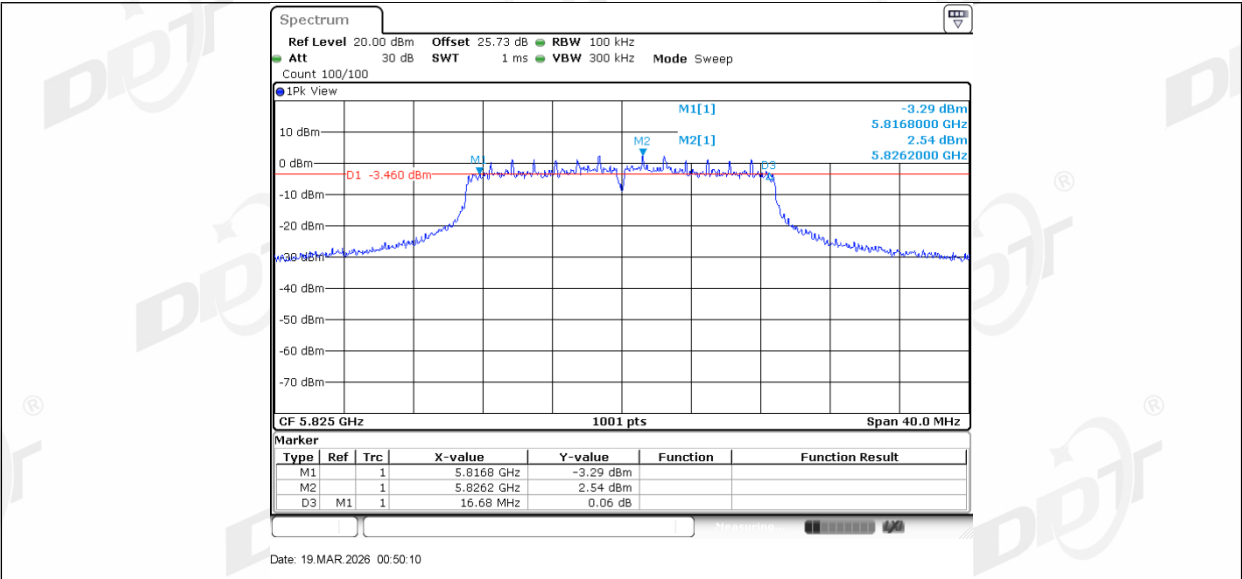


11AC20MIMO_Ant2_5825

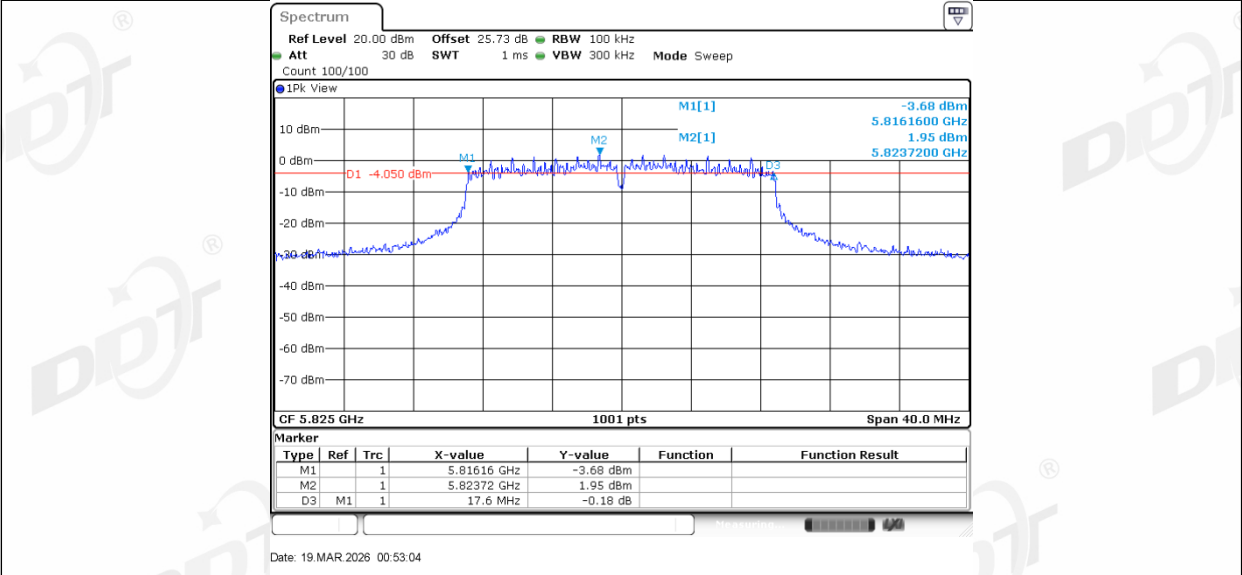


11AC40MIMO_Ant1_5710

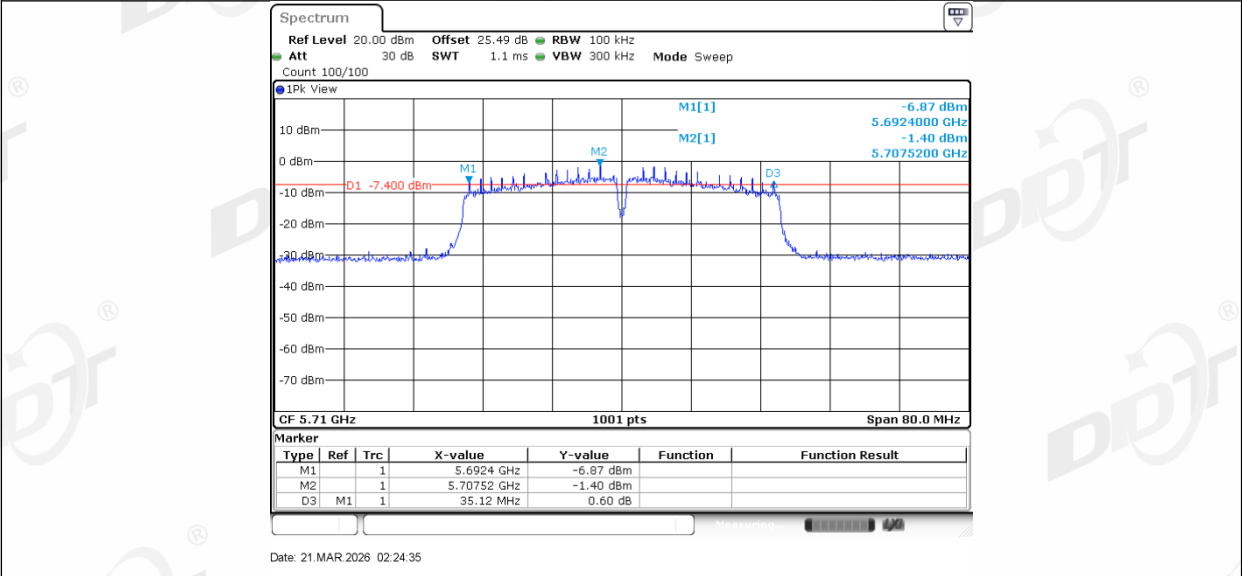


11AC40MIMO_Ant2_5710

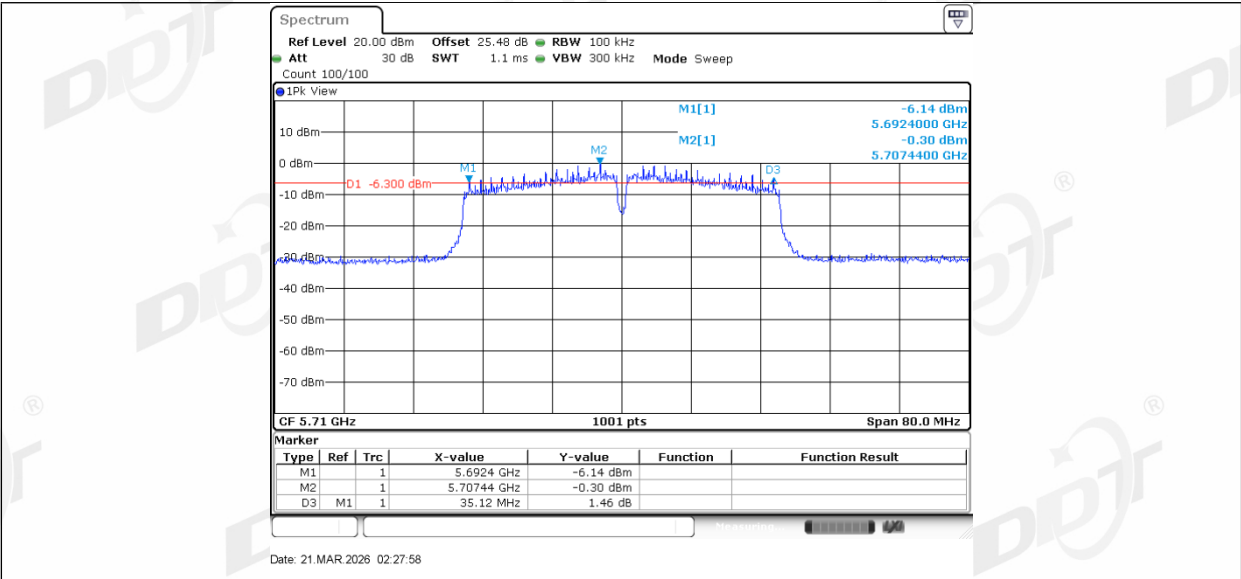


11AC40MIMO_Ant1_5755

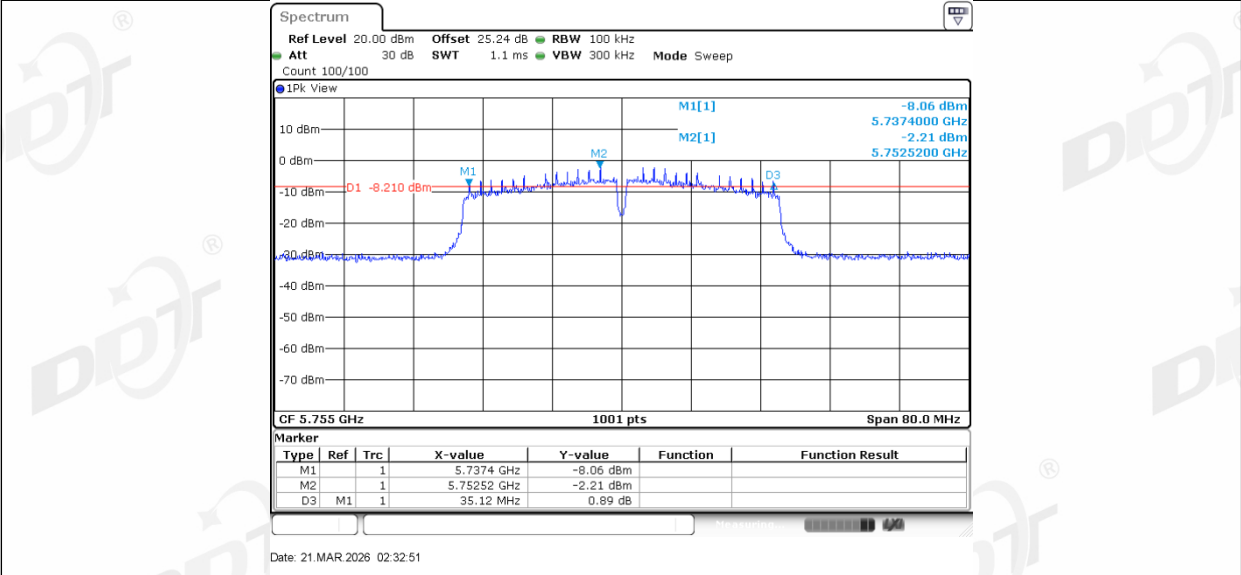


11AC40MIMO_Ant2_5755

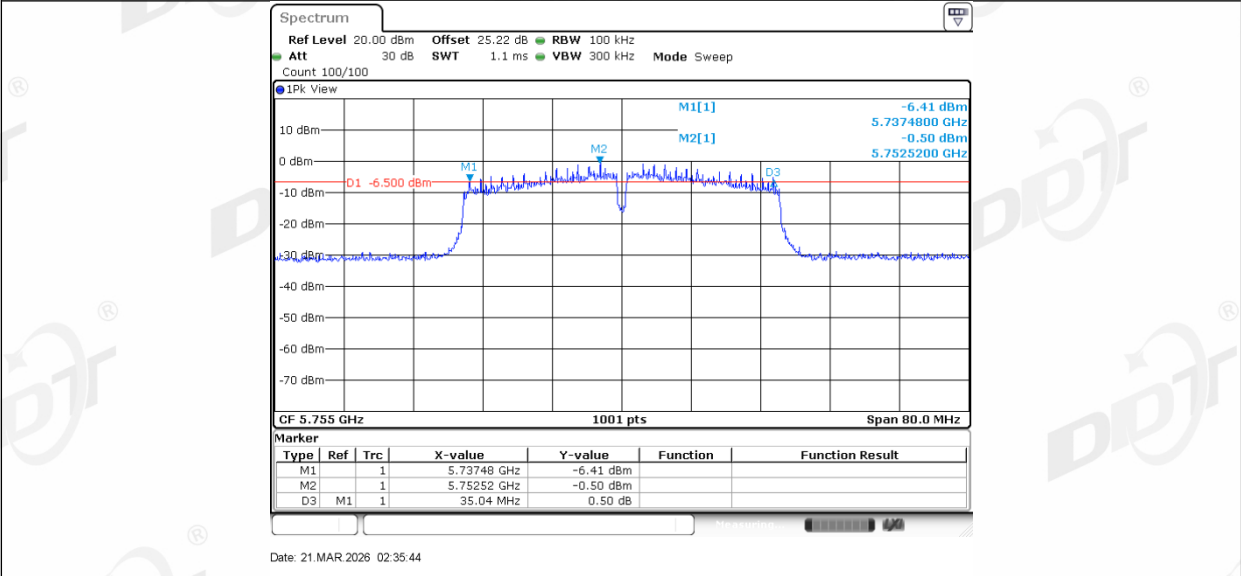


11AC40MIMO_Ant1_5795

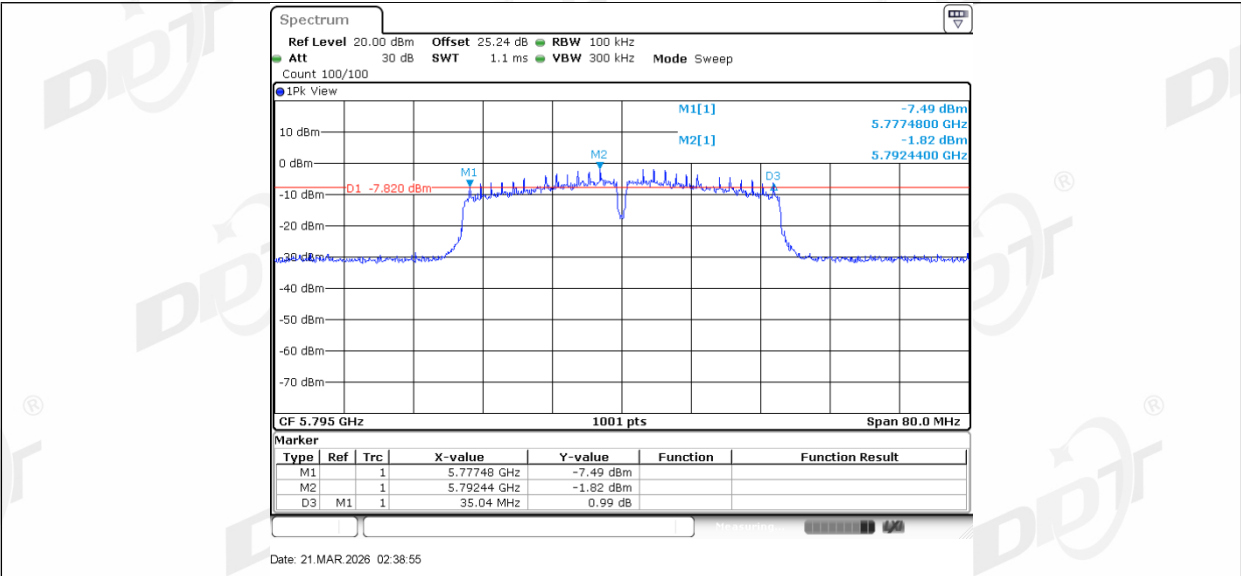


11AC40MIMO_Ant2_5795

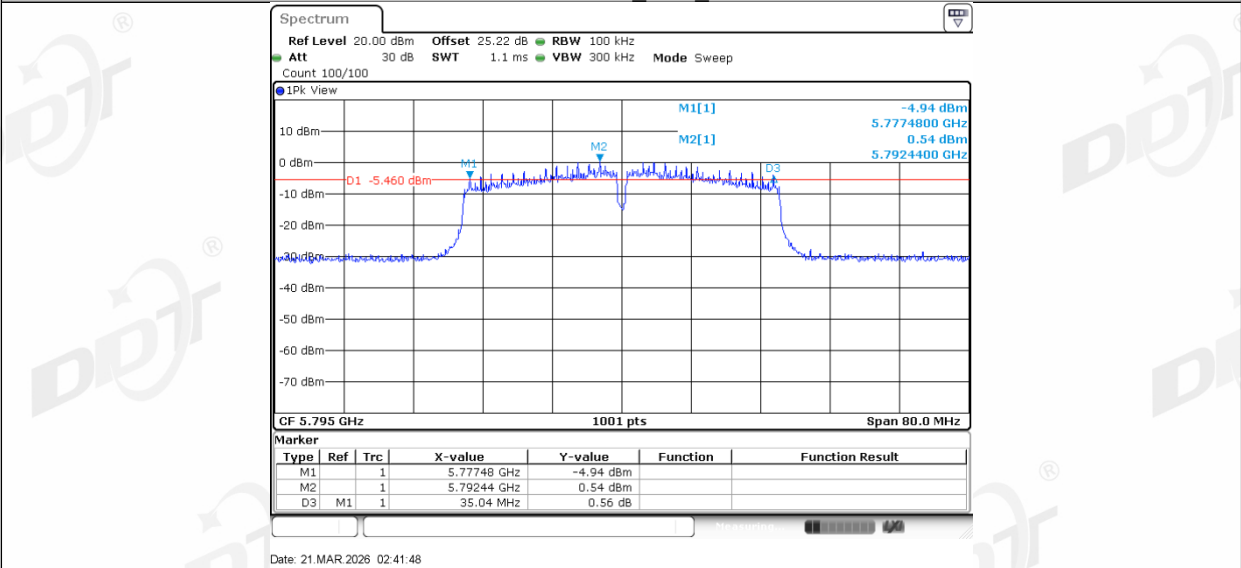


11AC80MIMO_Ant1_5690

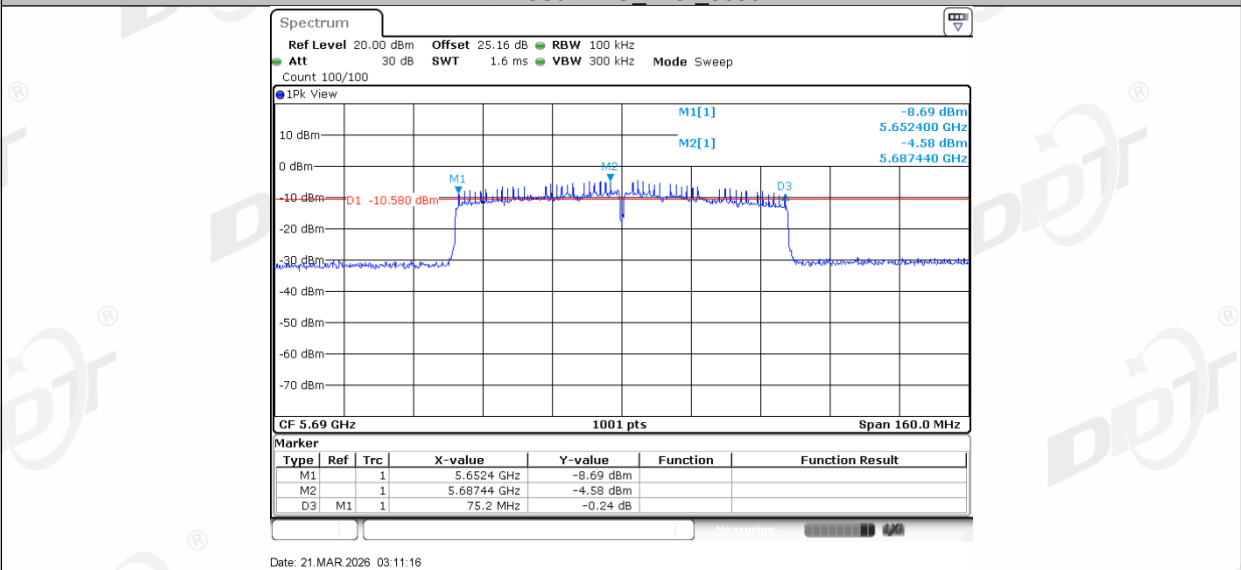


11AC80MIMO_Ant2_5690

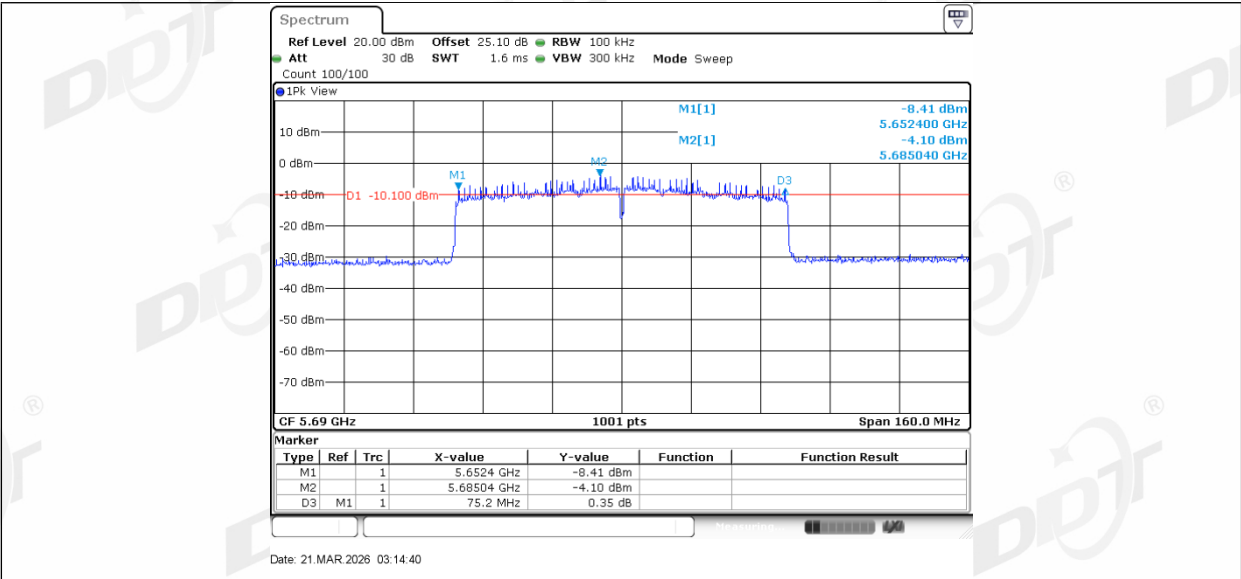


11AC80MIMO_Ant1_5775

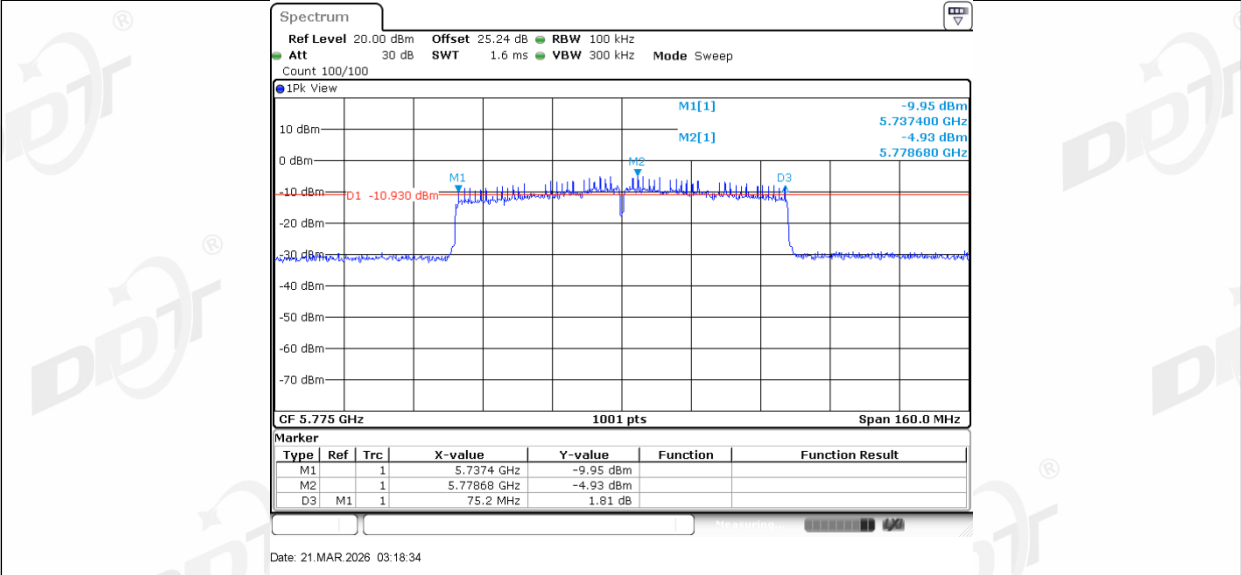


11AC80MIMO_Ant2_5775

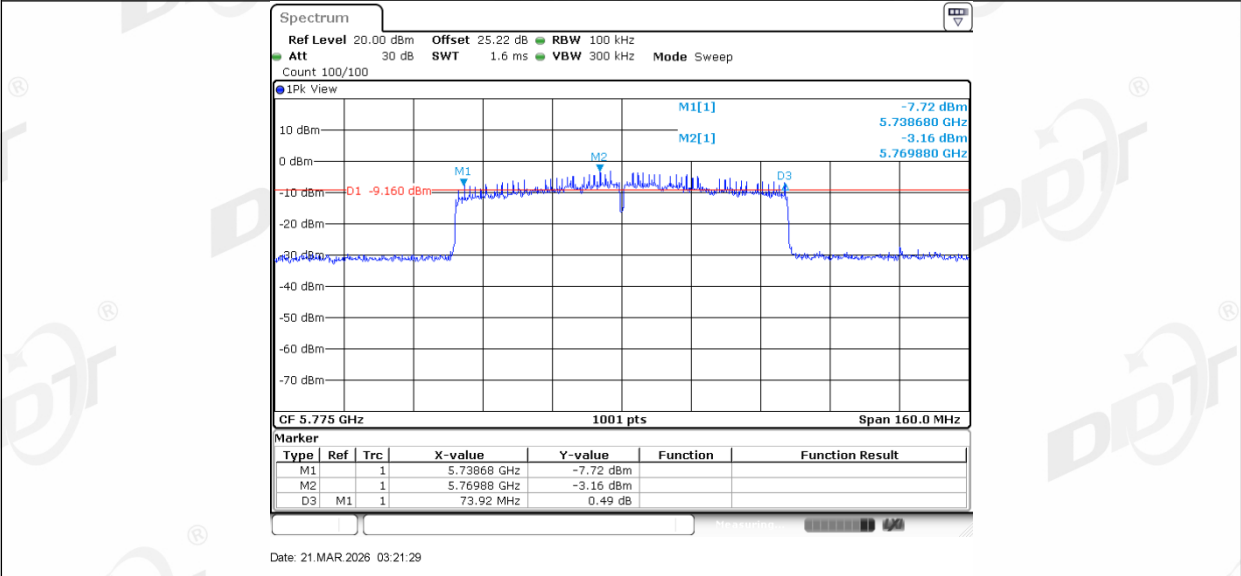


11AX20MIMO_Ant1_5720

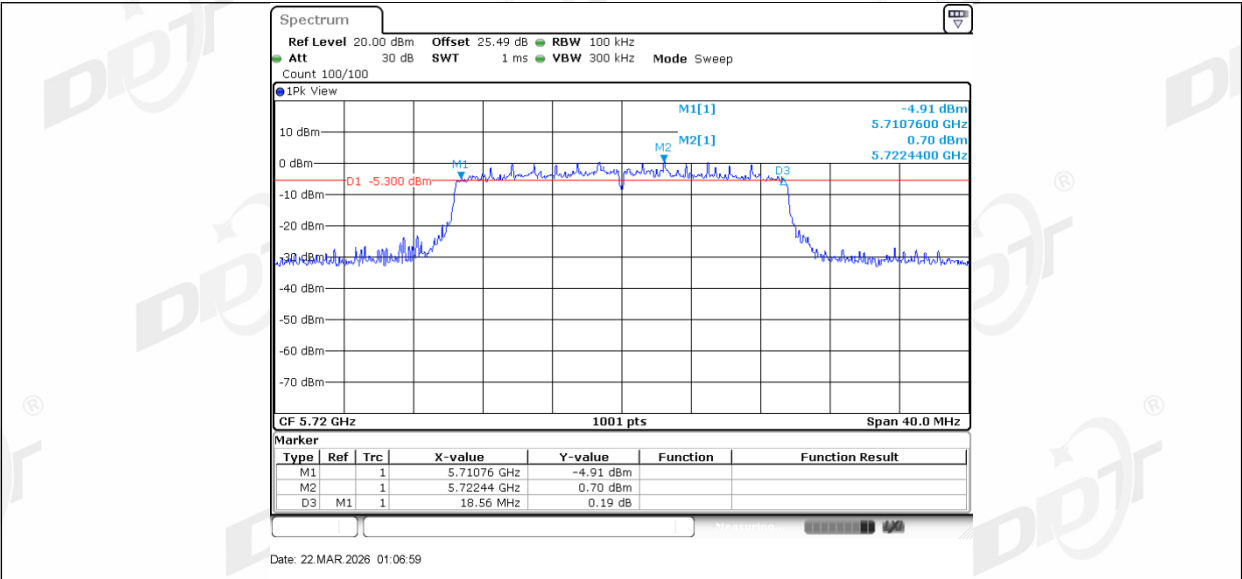


11AX20MIMO_Ant2_5720

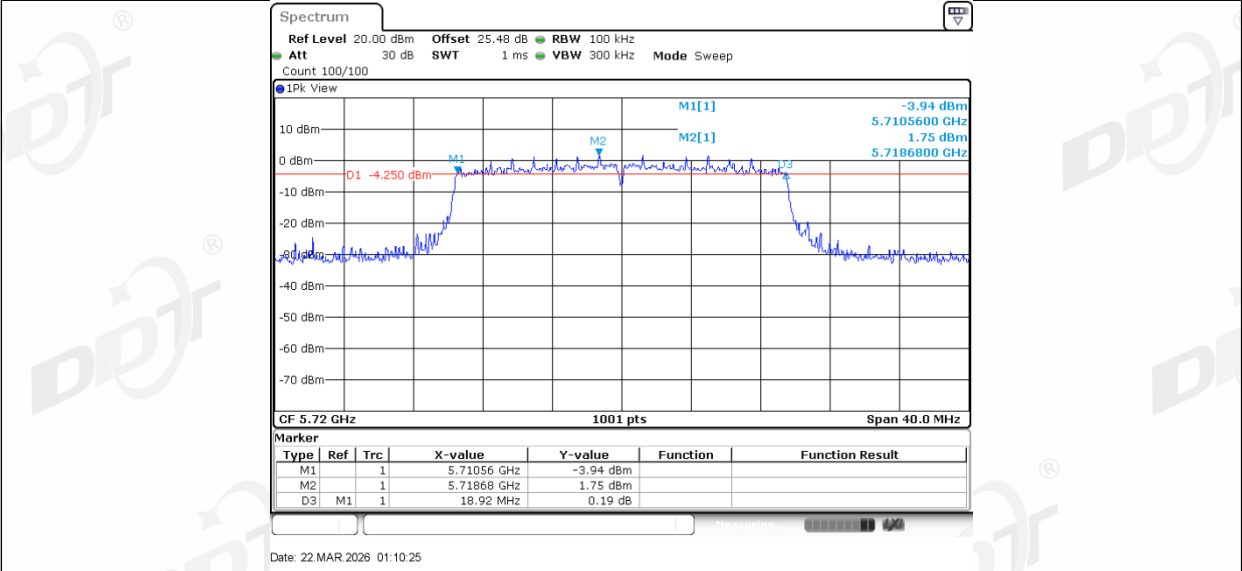


11AX20MIMO_Ant1_5745

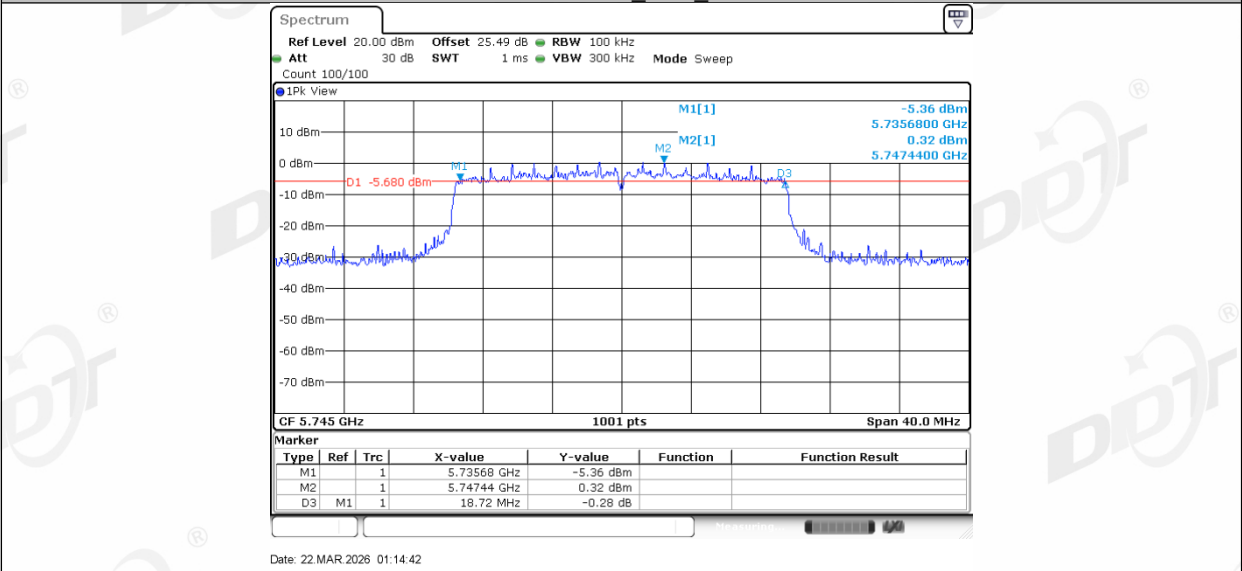


11AX20MIMO_Ant2_5745

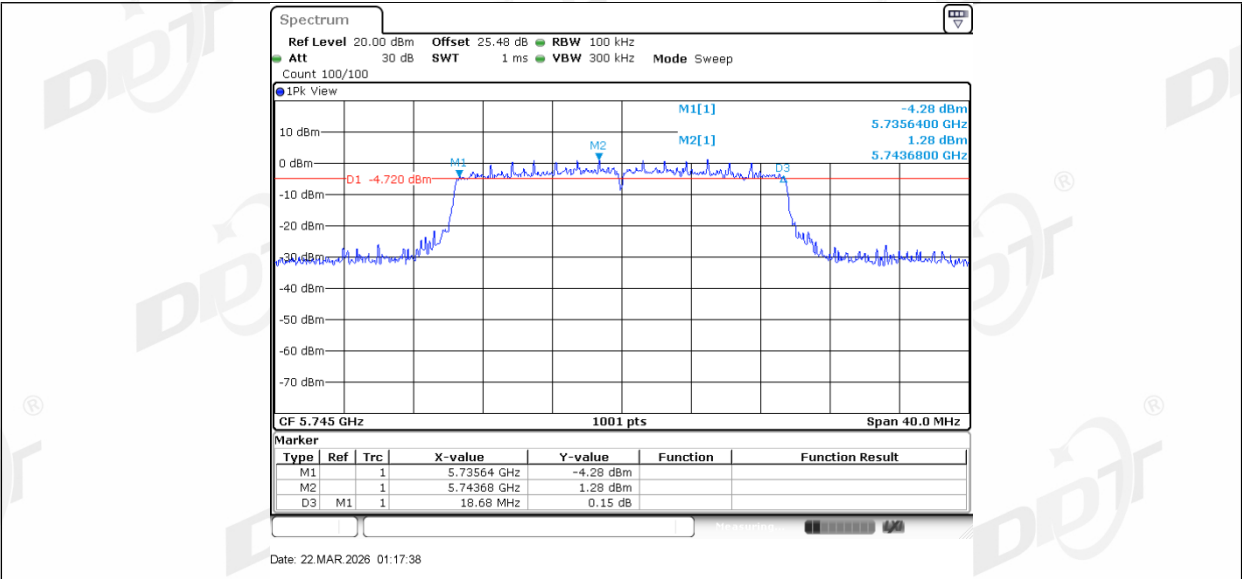


11AX20MIMO_Ant1_5785

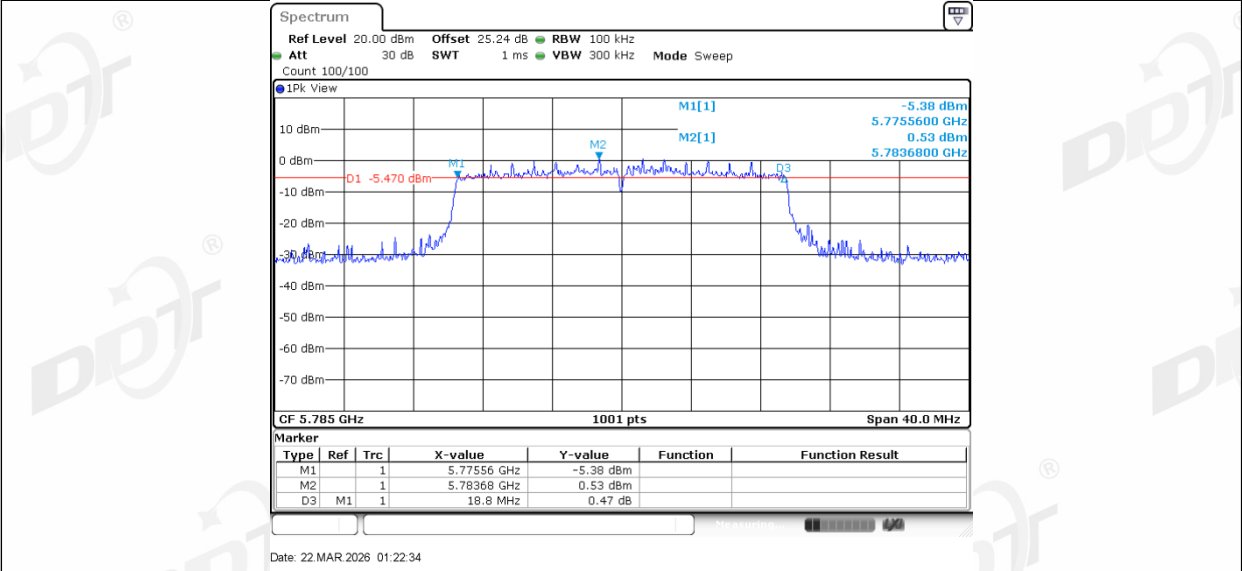


11AX20MIMO_Ant2_5785

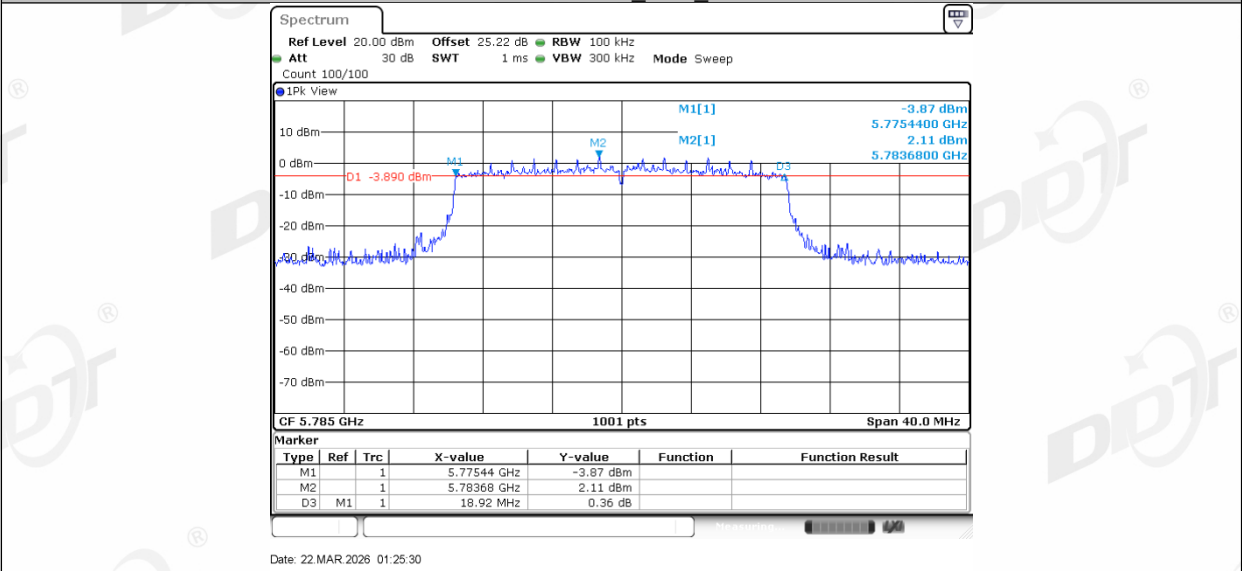


11AX20MIMO_Ant1_5825

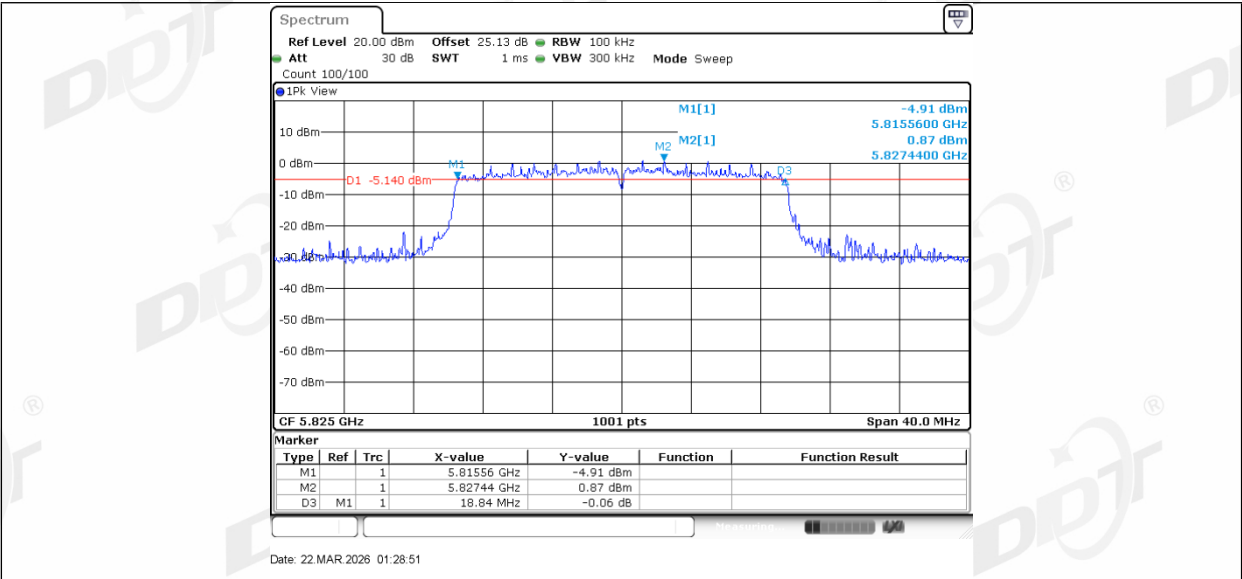


11AX20MIMO_Ant2_5825

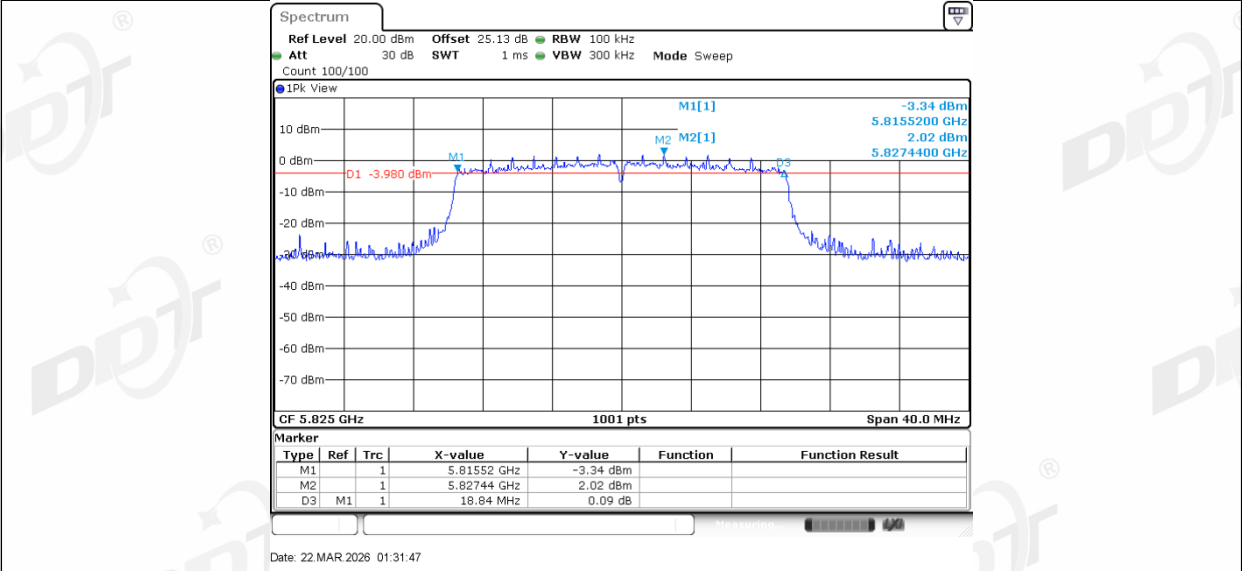


11AX40MIMO_Ant1_5710

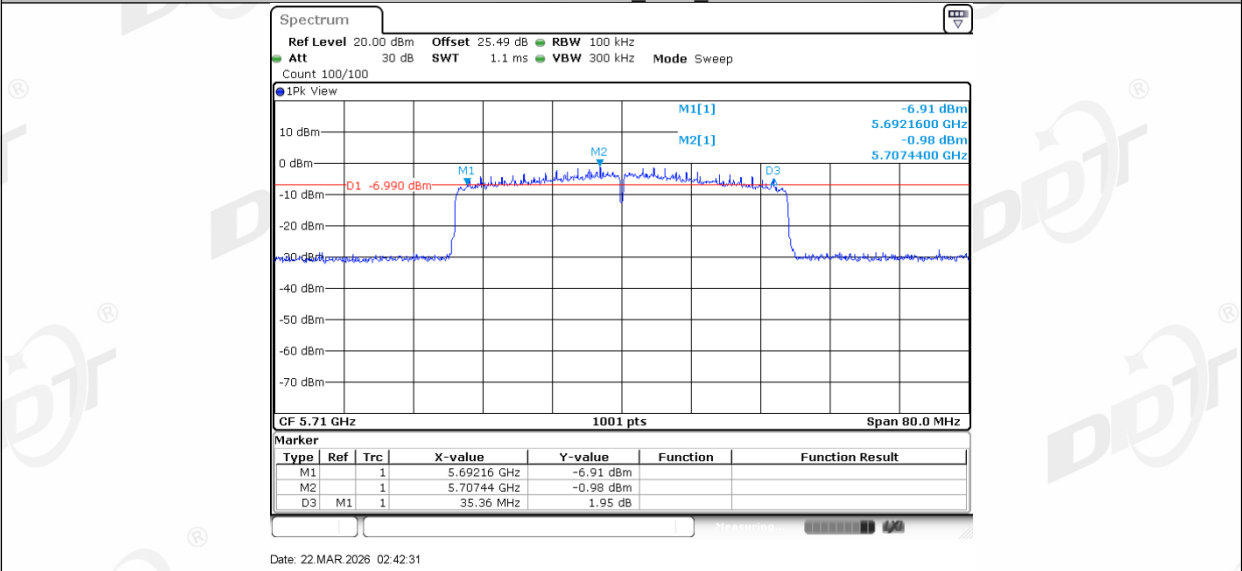


11AX40MIMO_Ant2_5710

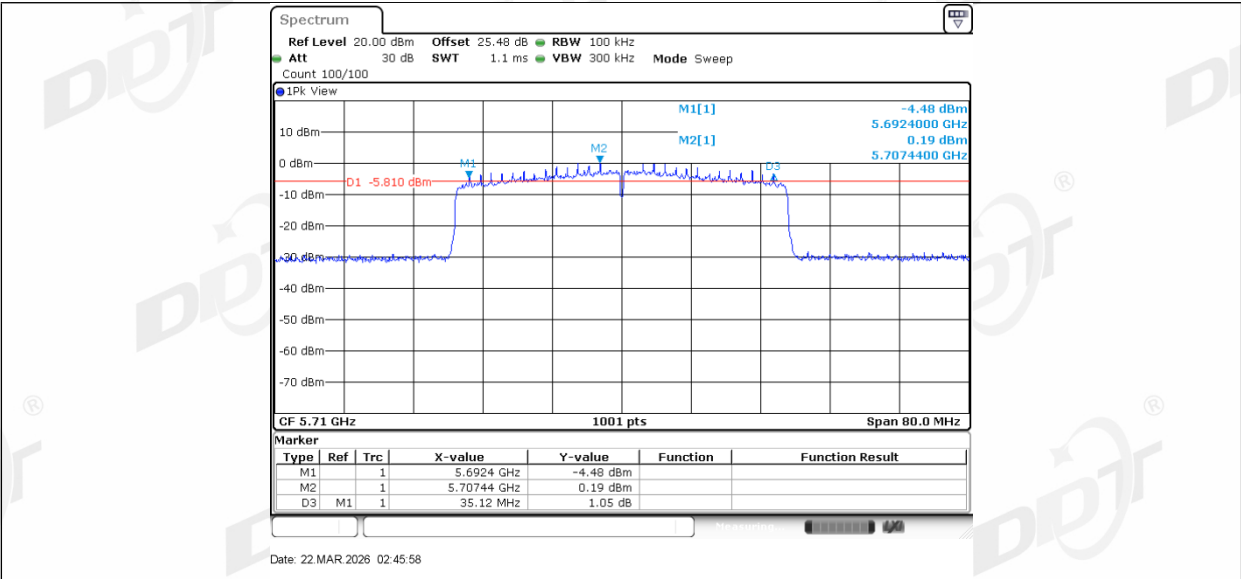


11AX40MIMO_Ant1_5755

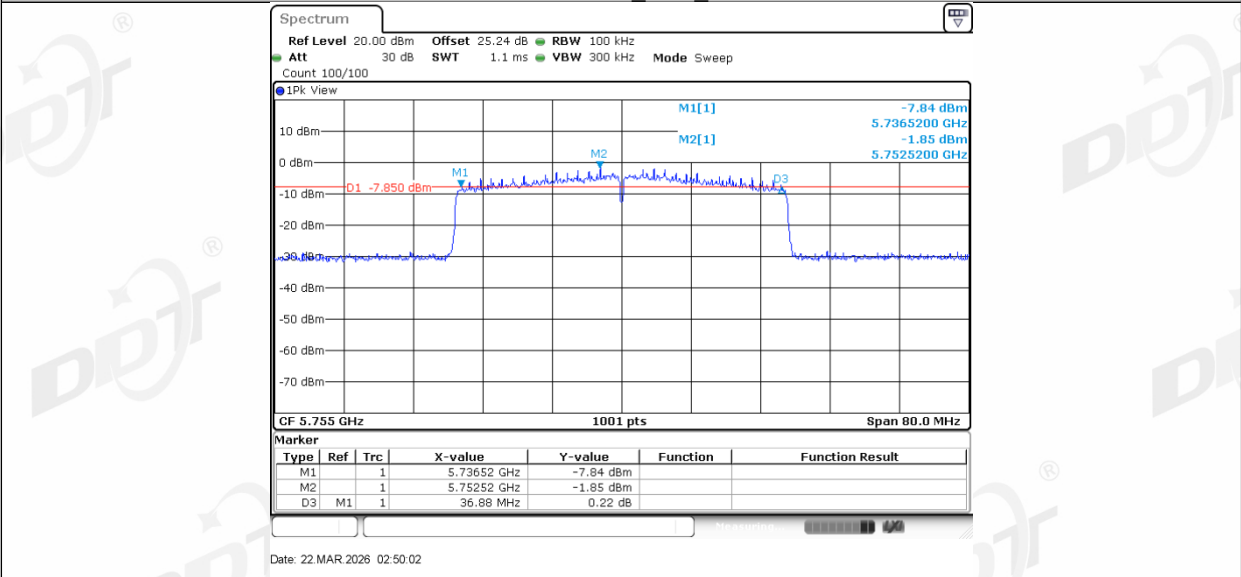


11AX40MIMO_Ant2_5755

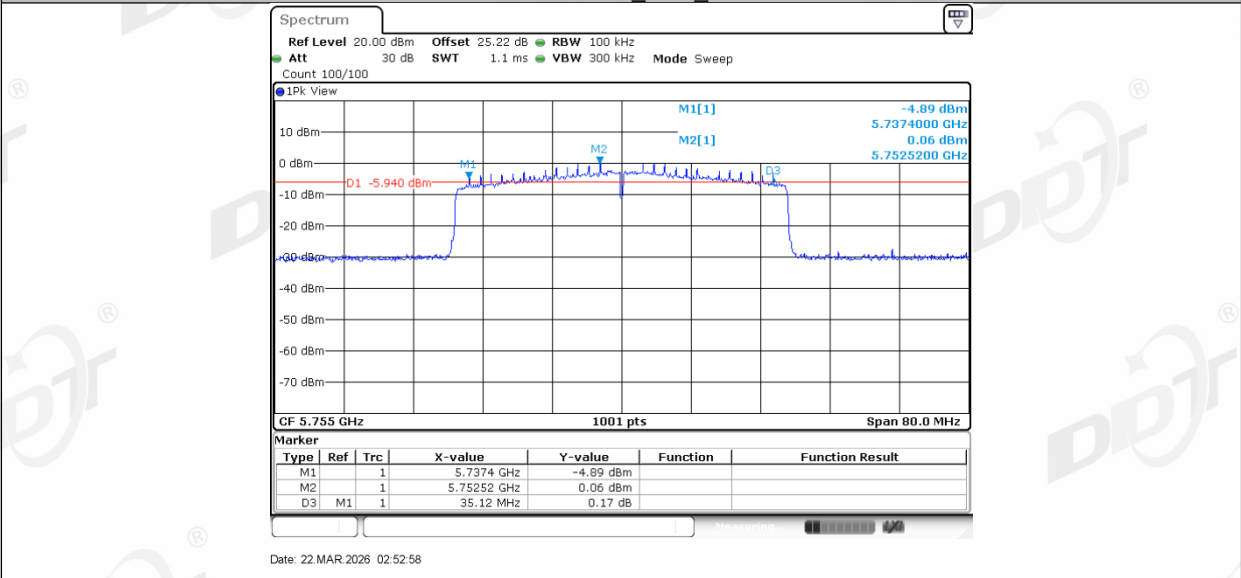


11AX40MIMO_Ant1_5795

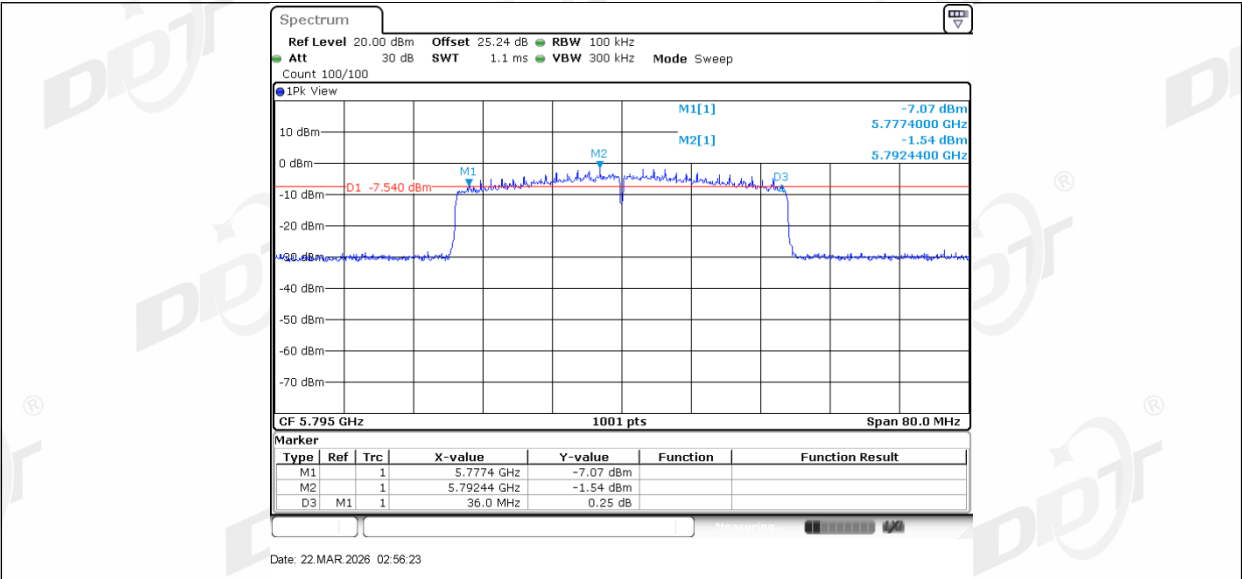

11AX40MIMO_Ant2_5795

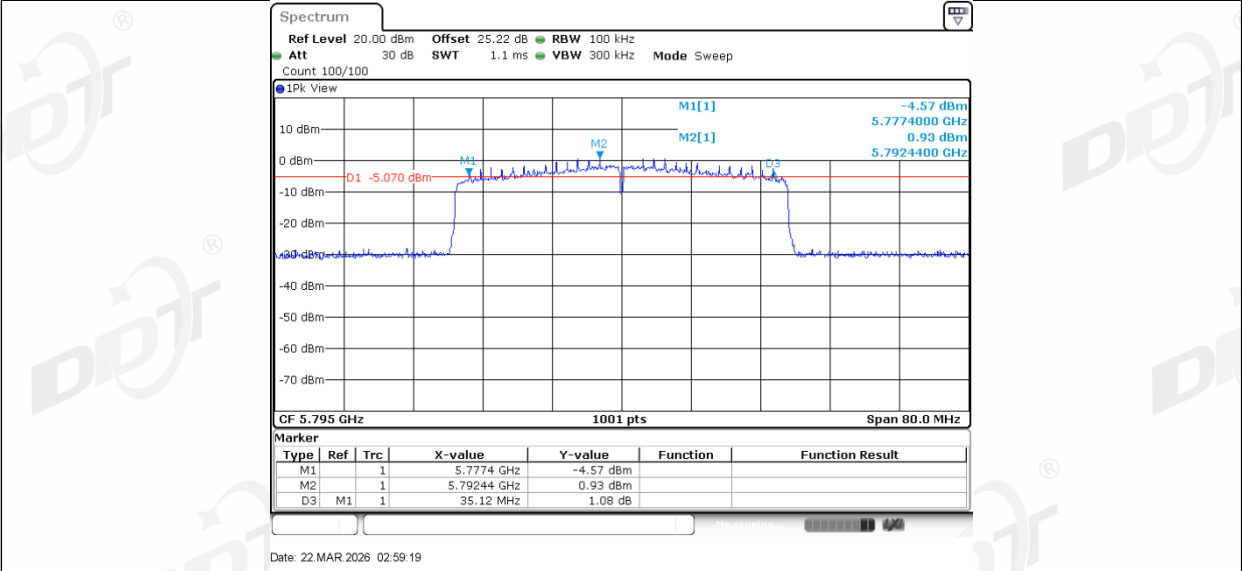

11AX80MIMO_Ant1_5690

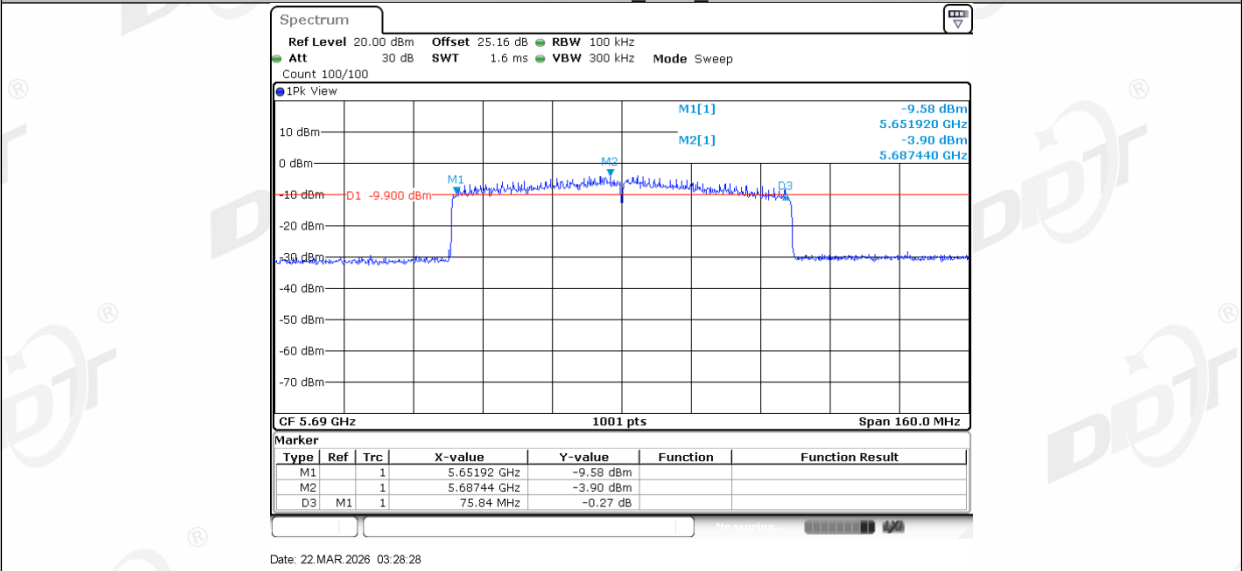


11AX80MIMO_Ant2_5690



6. 99% Bandwidth

6.1. Block diagram of test setup

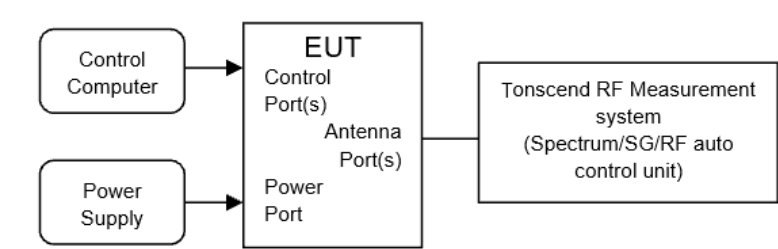

6.2. Limits

Just for Report.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Trace	Max hold

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4. Test result

Test Engineer:	Lin Guoyuan	Test Site:	RF Measurement System 5#
Ambient Condition:	24.3-26.1℃,43.5-45%RH	Test Date:	2026.03.14-2026.04.02
Test Power Supply:	AC 230V/50Hz	Sample Number:	S26030303-005

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.341	5170.1698	5189.5105	---	---
	Ant2	5180	19.301	5170.2498	5189.5504	---	---
	Ant1	5200	19.221	5190.3696	5209.5904	---	---
	Ant2	5200	19.221	5190.4096	5209.6304	---	---
	Ant1	5240	17.183	5231.3287	5248.5115	---	---
	Ant2	5240	17.183	5231.3686	5248.5514	---	---
	Ant1	5260	19.261	5250.3297	5269.5904	---	---
	Ant2	5260	19.341	5250.2897	5269.6304	---	---
	Ant1	5280	19.181	5270.3297	5289.5105	---	---
	Ant2	5280	19.141	5270.3696	5289.5105	---	---
	Ant1	5320	19.261	5310.2498	5329.5105	---	---
	Ant2	5320	19.261	5310.2098	5329.4705	---	---
	Ant1	5500	19.261	5490.2897	5509.5504	---	---
	Ant2	5500	19.301	5490.2498	5509.5504	---	---
	Ant1	5580	19.261	5570.2098	5589.4705	---	---
	Ant2	5580	19.221	5570.2498	5589.4705	---	---
	Ant1	5700	19.221	5690.2098	5709.4306	---	---
	Ant2	5700	19.221	5690.2098	5709.4306	---	---
	Ant1	5720	19.261	5710.2098	5729.4705	---	---
	Ant2	5720	19.261	5710.2498	5729.5105	---	---
	Ant1	5720 UNII-2C	14.79	5710.2098	5725	---	---
	Ant2	5720 UNII-2C	14.75	5710.2498	5725	---	---
	Ant1	5720 UNII-3	4.471	5725	5729.4705	---	---
	Ant2	5720 UNII-3	4.511	5725	5729.5105	---	---
	Ant1	5745	19.421	5735.1299	5754.5504	---	---
	Ant2	5745	19.421	5735.1698	5754.5904	---	---
	Ant1	5785	19.381	5775.2498	5794.6304	---	---
	Ant2	5785	19.341	5775.2897	5794.6304	---	---
	Ant1	5825	19.301	5815.3297	5834.6304	---	---
	Ant2	5825	19.181	5815.3696	5834.5504	---	---
11N20MIMO	Ant1	5180	20.100	5170.0100	5190.1099	---	---
	Ant2	5180	18.741	5170.4895	5189.2308	---	---
	Ant1	5200	20.020	5190.0500	5210.0699	---	---
	Ant2	5200	18.741	5190.5694	5209.3107	---	---
	Ant1	5240	17.942	5230.9690	5248.9111	---	---
	Ant2	5240	17.702	5231.1289	5248.8312	---	---
	Ant1	5260	20.180	5249.9700	5270.1499	---	---
	Ant2	5260	18.581	5250.4496	5269.0310	---	---
	Ant1	5280	20.060	5269.9700	5290.0300	---	---
	Ant2	5280	18.661	5270.3297	5288.9910	---	---
	Ant1	5320	20.220	5309.8501	5330.0699	---	---
	Ant2	5320	18.781	5310.7293	5329.5105	---	---
	Ant1	5500	20.180	5489.9301	5510.1099	---	---
	Ant2	5500	18.661	5490.3696	5509.0310	---	---
	Ant1	5580	20.100	5569.8901	5589.9900	---	---
	Ant2	5580	18.501	5570.8891	5589.3906	---	---
	Ant1	5700	20.100	5689.8901	5709.9900	---	---
	Ant2	5700	18.541	5690.6094	5709.1508	---	---
	Ant1	5720	20.180	5709.8102	5729.9900	---	---
	Ant2	5720	18.621	5710.5694	5729.1908	---	---
	Ant1	5720 UNII-2C	15.19	5709.8102	5725	---	---
	Ant2	5720 UNII-2C	14.431	5710.5694	5725	---	---
	Ant1	5720 UNII-3	4.99	5725	5729.9900	---	---
	Ant2	5720 UNII-3	4.191	5725	5729.1908	---	---
	Ant1	5745	20.260	5734.8102	5755.0699	---	---


	Ant2	5745	18.621	5735.5295	5754.1508	---	---
	Ant1	5785	20.340	5774.8901	5795.2298	---	---
	Ant2	5785	18.861	5775.2897	5794.1508	---	---
	Ant1	5825	20.100	5814.9700	5835.0699	---	---
	Ant2	5825	18.541	5815.7692	5834.3107	---	---
11N40MIMO	Ant1	5190	35.964	5172.0180	5207.9820	---	---
	Ant2	5190	36.124	5171.9381	5208.0619	---	---
	Ant1	5230	35.964	5212.0180	5247.9820	---	---
	Ant2	5230	36.044	5212.0180	5248.0619	---	---
	Ant1	5270	36.044	5252.0180	5288.0619	---	---
	Ant2	5270	36.044	5251.9381	5287.9820	---	---
	Ant1	5310	35.964	5292.0180	5327.9820	---	---
	Ant2	5310	36.044	5291.9381	5327.9820	---	---
	Ant1	5510	35.884	5492.0979	5527.9820	---	---
	Ant2	5510	36.044	5491.9381	5527.9820	---	---
	Ant1	5550	36.044	5531.9381	5567.9820	---	---
	Ant2	5550	36.204	5531.8581	5568.0619	---	---
	Ant1	5670	36.044	5651.8581	5687.9021	---	---
	Ant2	5670	36.124	5651.8581	5687.9820	---	---
	Ant1	5710	36.044	5691.9381	5727.9820	---	---
	Ant2	5710	36.124	5691.8581	5727.9820	---	---
	Ant1	5710 UNII-2C	33.062	5691.9381	5725	---	---
	Ant2	5710 UNII-2C	33.142	5691.8581	5725	---	---
	Ant1	5710 UNII-3	2.982	5725	5727.9820	---	---
	Ant2	5710 UNII-3	2.982	5725	5727.9820	---	---
	Ant1	5755	36.124	5736.8581	5772.9820	---	---
	Ant2	5755	36.124	5736.9381	5773.0619	---	---
	Ant1	5795	36.044	5777.0180	5813.0619	---	---
	Ant2	5795	36.044	5776.9381	5812.9820	---	---
11AC20MIMO	Ant1	5180	19.980	5169.9700	5189.9500	---	---
	Ant2	5180	18.382	5170.8492	5189.2308	---	---
	Ant1	5200	19.940	5190.0500	5209.9900	---	---
	Ant2	5200	18.342	5190.8891	5209.2308	---	---
	Ant1	5240	17.982	5230.9690	5248.9510	---	---
	Ant2	5240	17.622	5231.1688	5248.7912	---	---
	Ant1	5260	19.780	5250.0899	5269.8701	---	---
	Ant2	5260	18.302	5250.8891	5269.1908	---	---
	Ant1	5280	19.660	5270.1698	5289.8302	---	---
	Ant2	5280	18.222	5270.8891	5289.1109	---	---
	Ant1	5320	19.820	5310.0100	5329.8302	---	---
	Ant2	5320	18.342	5310.8092	5329.1508	---	---
	Ant1	5500	19.940	5490.0500	5509.9900	---	---
	Ant2	5500	18.382	5490.8092	5509.1908	---	---
	Ant1	5580	19.820	5570.0100	5589.8302	---	---
	Ant2	5580	18.262	5570.8891	5589.1508	---	---
	Ant1	5700	19.980	5689.8901	5709.8701	---	---
	Ant2	5700	18.342	5690.8092	5709.1508	---	---
	Ant1	5720	19.780	5710.0100	5729.7902	---	---
	Ant2	5720	18.262	5710.8891	5729.1508	---	---
	Ant1	5720 UNII-2C	14.99	5710.0100	5725	---	---
	Ant2	5720 UNII-2C	14.111	5710.8891	5725	---	---
	Ant1	5720 UNII-3	4.79	5725	5729.7902	---	---
	Ant2	5720 UNII-3	4.151	5725	5729.1508	---	---
	Ant1	5745	19.860	5734.9700	5754.8302	---	---
	Ant2	5745	18.302	5735.8492	5754.1508	---	---
	Ant1	5785	19.820	5775.1299	5794.9500	---	---
	Ant2	5785	18.262	5775.8891	5794.1508	---	---
	Ant1	5825	19.780	5815.1299	5834.9101	---	---
	Ant2	5825	18.222	5815.8891	5834.1109	---	---
11AC40MIMO	Ant1	5190	35.884	5172.0180	5207.9021	---	---
	Ant2	5190	36.124	5171.9381	5208.0619	---	---
	Ant1	5230	35.884	5212.0180	5247.9021	---	---
	Ant2	5230	36.204	5211.9381	5248.1419	---	---
	Ant1	5270	35.884	5252.0979	5287.9820	---	---

	Ant2	5270	36.124	5251.9381	5288.0619	---	---
	Ant1	5310	35.884	5292.0180	5327.9021	---	---
	Ant2	5310	36.124	5291.8581	5327.9820	---	---
	Ant1	5510	35.804	5492.0979	5527.9021	---	---
	Ant2	5510	36.124	5491.9381	5528.0619	---	---
	Ant1	5550	35.884	5532.0180	5567.9021	---	---
	Ant2	5550	36.204	5531.8581	5568.0619	---	---
	Ant1	5670	35.884	5652.0180	5687.9021	---	---
	Ant2	5670	36.204	5651.8581	5688.0619	---	---
	Ant1	5710	35.964	5691.9381	5727.9021	---	---
	Ant2	5710	36.204	5691.9381	5728.1419	---	---
	Ant1	5710 UNII-2C	33.062	5691.9381	5725	---	---
	Ant2	5710 UNII-2C	33.062	5691.9381	5725	---	---
	Ant1	5710 UNII-3	2.902	5725	5727.9021	---	---
	Ant2	5710 UNII-3	3.142	5725	5728.1419	---	---
	Ant1	5755	35.964	5737.0180	5772.9820	---	---
	Ant2	5755	36.204	5736.9381	5773.1419	---	---
	Ant1	5795	35.964	5777.0180	5812.9820	---	---
	Ant2	5795	36.124	5776.9381	5813.0619	---	---
11AC80MIM O	Ant1	5210	75.285	5172.4376	5247.7223	---	---
	Ant2	5210	75.125	5172.5974	5247.7223	---	---
	Ant1	5290	75.125	5252.4376	5327.5624	---	---
	Ant2	5290	74.805	5252.5974	5327.4026	---	---
	Ant1	5530	75.285	5492.4376	5567.7223	---	---
	Ant2	5530	74.965	5492.4376	5567.4026	---	---
	Ant1	5610	75.285	5572.2777	5647.5624	---	---
	Ant2	5610	74.965	5572.5974	5647.5624	---	---
	Ant1	5690	75.445	5652.1179	5727.5624	---	---
	Ant2	5690	75.125	5652.4376	5727.5624	---	---
	Ant1	5690 UNII-2C	72.882	5652.1179	5725	---	---
	Ant2	5690 UNII-2C	72.562	5652.4376	5725	---	---
	Ant1	5690 UNII-3	2.562	5725	5727.5624	---	---
	Ant2	5690 UNII-3	2.562	5725	5727.5624	---	---
11AX20MIM O	Ant1	5775	75.445	5737.2777	5812.7223	---	---
	Ant2	5775	74.965	5737.5974	5812.5624	---	---
	Ant1	5180	19.461	5170.2098	5189.6703	---	---
	Ant2	5180	19.341	5170.2897	5189.6304	---	---
	Ant1	5200	19.461	5190.2498	5209.7103	---	---
	Ant2	5200	19.341	5190.2897	5209.6304	---	---
	Ant1	5240	18.901	5230.5295	5249.4306	---	---
	Ant2	5240	18.901	5230.4895	5249.3906	---	---
	Ant1	5260	19.461	5250.2098	5269.6703	---	---
	Ant2	5260	19.341	5250.2897	5269.6304	---	---
	Ant1	5280	19.381	5270.2897	5289.6703	---	---
	Ant2	5280	19.301	5270.2897	5289.5904	---	---
	Ant1	5320	19.421	5310.2498	5329.6703	---	---
	Ant2	5320	19.301	5310.2897	5329.5904	---	---
	Ant1	5500	19.421	5490.2498	5509.6703	---	---
	Ant2	5500	19.341	5490.2897	5509.6304	---	---
	Ant1	5580	19.381	5570.2498	5589.6304	---	---
	Ant2	5580	19.301	5570.2897	5589.5904	---	---
	Ant1	5700	19.421	5690.2098	5709.6304	---	---
	Ant2	5700	19.341	5690.2897	5709.6304	---	---
	Ant1	5720	19.421	5710.2498	5729.6703	---	---
	Ant2	5720	19.341	5710.2897	5729.6304	---	---
	Ant1	5720 UNII-2C	14.75	5710.2498	5725	---	---
	Ant2	5720 UNII-2C	14.71	5710.2897	5725	---	---
	Ant1	5720 UNII-3	4.67	5725	5729.6703	---	---
	Ant2	5720 UNII-3	4.63	5725	5729.6304	---	---
	Ant1	5745	19.461	5735.2098	5754.6703	---	---
	Ant2	5745	19.421	5735.2498	5754.6703	---	---
	Ant1	5785	19.421	5775.2498	5794.6703	---	---
	Ant2	5785	19.341	5775.2897	5794.6304	---	---
	Ant1	5825	19.500	5815.2098	5834.7103	---	---


11AX40MIM O	Ant2	5825	19.301	5815.2897	5834.5904	---	---
	Ant1	5190	37.642	5171.1389	5208.7812	---	---
	Ant2	5190	37.642	5171.1389	5208.7812	---	---
	Ant1	5230	37.642	5211.1389	5248.7812	---	---
	Ant2	5230	37.642	5211.2188	5248.8611	---	---
	Ant1	5270	37.642	5251.1389	5288.7812	---	---
	Ant2	5270	37.562	5251.2188	5288.7812	---	---
	Ant1	5310	37.642	5291.1389	5328.7812	---	---
	Ant2	5310	37.562	5291.1389	5328.7013	---	---
	Ant1	5510	37.642	5491.1389	5528.7812	---	---
	Ant2	5510	37.642	5491.1389	5528.7812	---	---
	Ant1	5550	37.642	5531.1389	5568.7812	---	---
	Ant2	5550	37.642	5531.1389	5568.7812	---	---
	Ant1	5670	37.722	5651.0589	5688.7812	---	---
	Ant2	5670	37.642	5651.1389	5688.7812	---	---
	Ant1	5710	37.722	5691.0589	5728.7812	---	---
	Ant2	5710	37.642	5691.1389	5728.7812	---	---
	Ant1	5710 UNII-2C	33.941	5691.0589	5725	---	---
	Ant2	5710 UNII-2C	33.861	5691.1389	5725	---	---
	Ant1	5710 UNII-3	3.781	5725	5728.7812	---	---
	Ant2	5710 UNII-3	3.781	5725	5728.7812	---	---
	Ant1	5755	37.722	5736.0589	5773.7812	---	---
	Ant2	5755	37.642	5736.1389	5773.7812	---	---
	Ant1	5795	37.642	5776.1389	5813.7812	---	---
	Ant2	5795	37.642	5776.1389	5813.7812	---	---
11AX80MIM O	Ant1	5210	77.043	5171.4785	5248.5215	---	---
	Ant2	5210	77.203	5171.4785	5248.6813	---	---
	Ant1	5290	76.883	5251.6384	5328.5215	---	---
	Ant2	5290	76.883	5251.4785	5328.3616	---	---
	Ant1	5530	77.043	5491.6384	5568.6813	---	---
	Ant2	5530	77.043	5491.3187	5568.3616	---	---
	Ant1	5610	77.043	5571.4785	5648.5215	---	---
	Ant2	5610	76.883	5571.6384	5648.5215	---	---
	Ant1	5690	77.203	5651.1588	5728.3616	---	---
	Ant2	5690	77.203	5651.3187	5728.5215	---	---
	Ant1	5690 UNII-2C	73.841	5651.1588	5725	---	---
	Ant2	5690 UNII-2C	73.681	5651.3187	5725	---	---
	Ant1	5690 UNII-3	3.362	5725	5728.3616	---	---
	Ant2	5690 UNII-3	3.521	5725	5728.5215	---	---
	Ant1	5775	77.363	5736.3187	5813.6813	---	---
	Ant2	5775	77.203	5736.4785	5813.6813	---	---

6.5. Test graphs




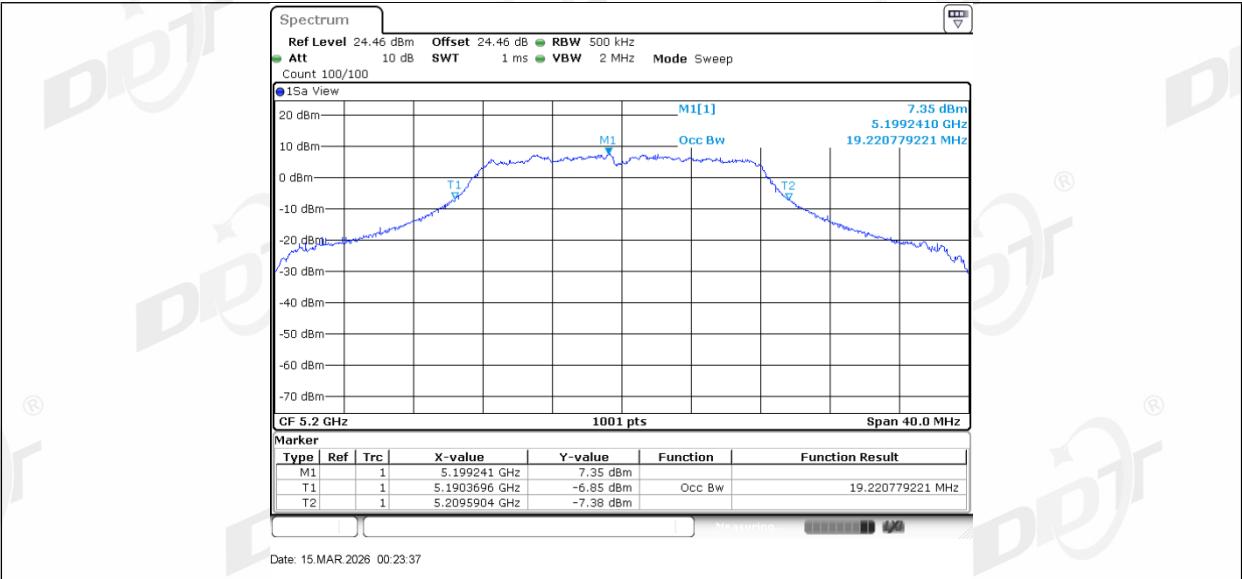


11A_Ant2_5200

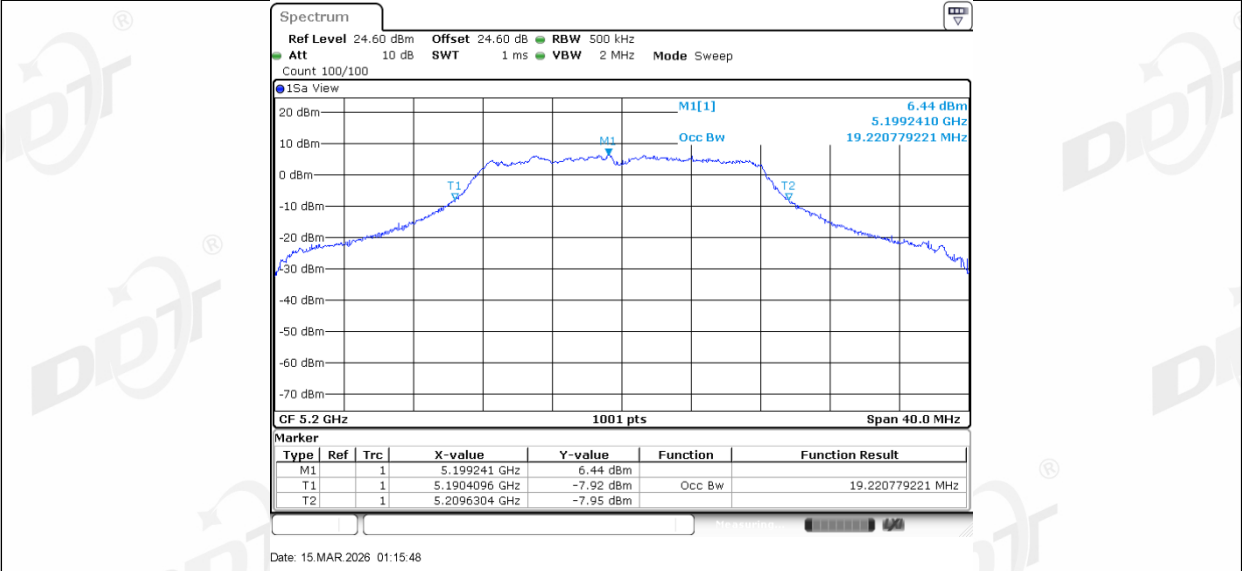


11A_Ant1_5240

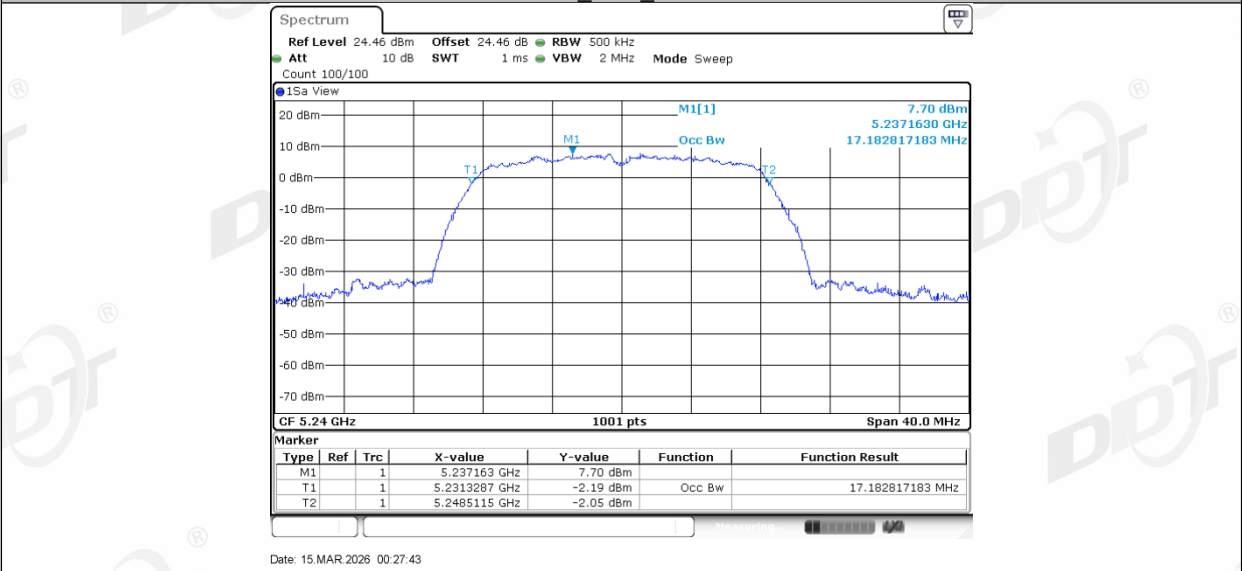


11A_Ant2_5240

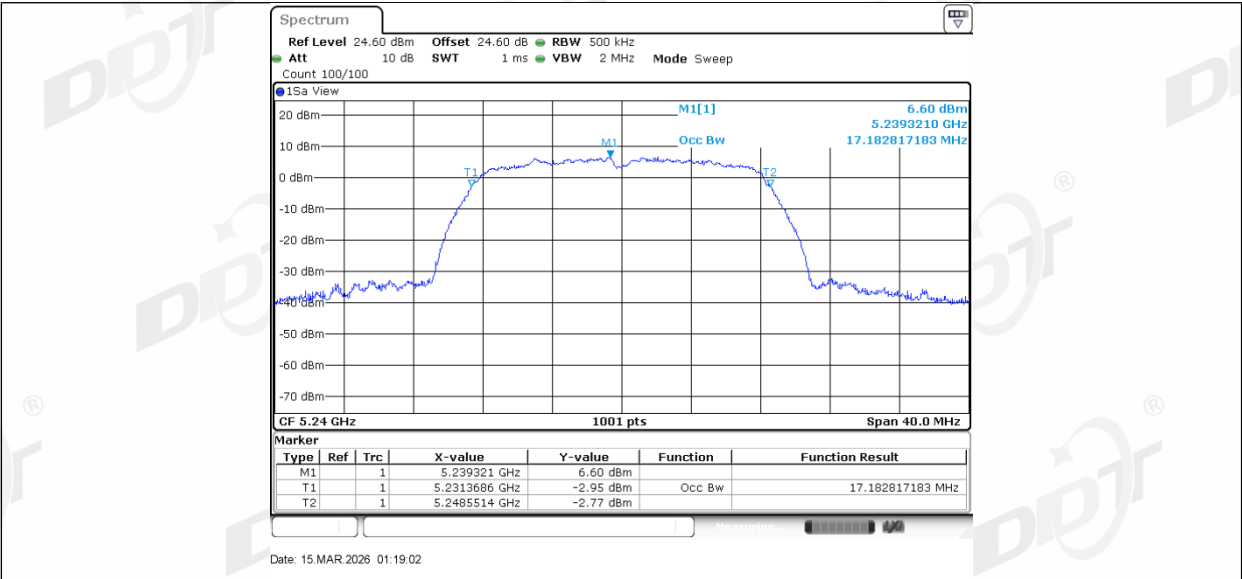


11A_Ant1_5260

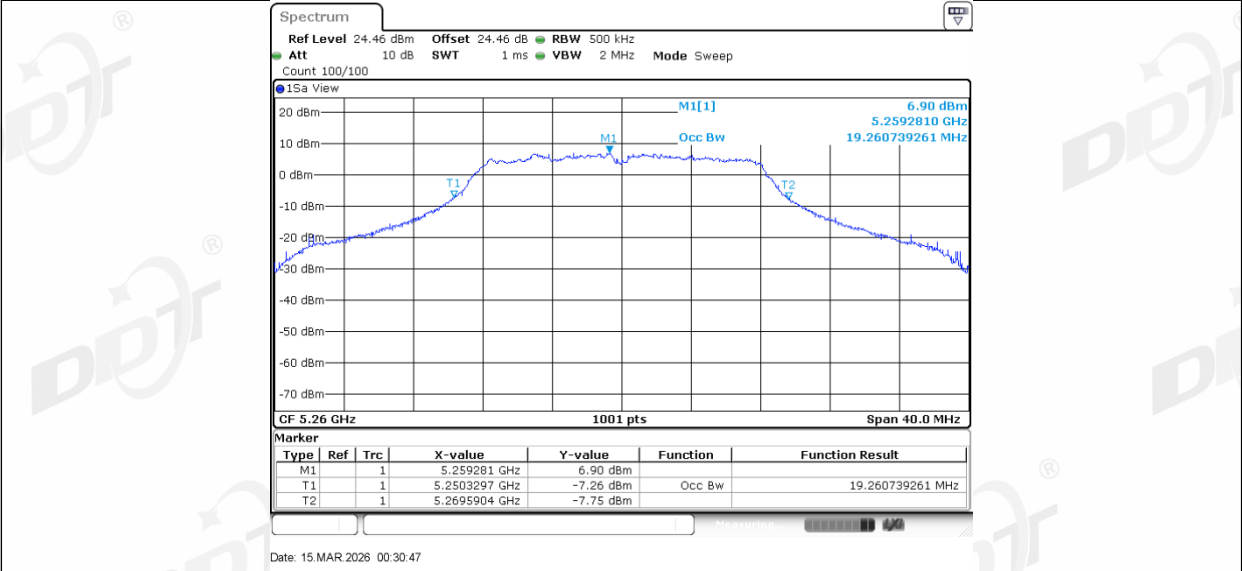


11A_Ant2_5260

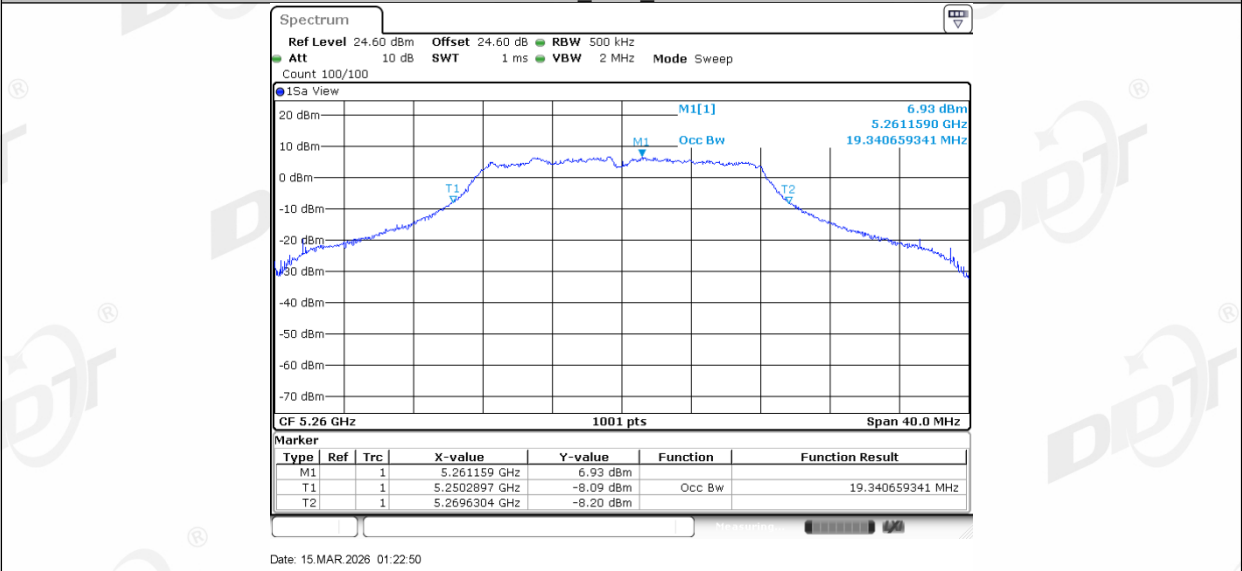


11A_Ant1_5280

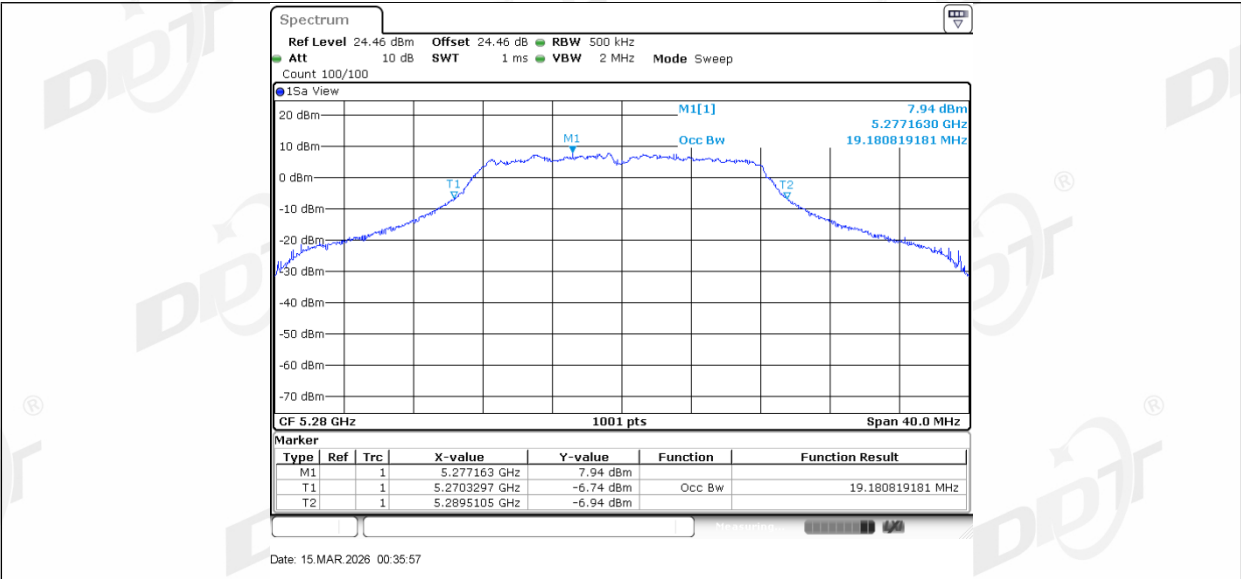


11A_Ant2_5280

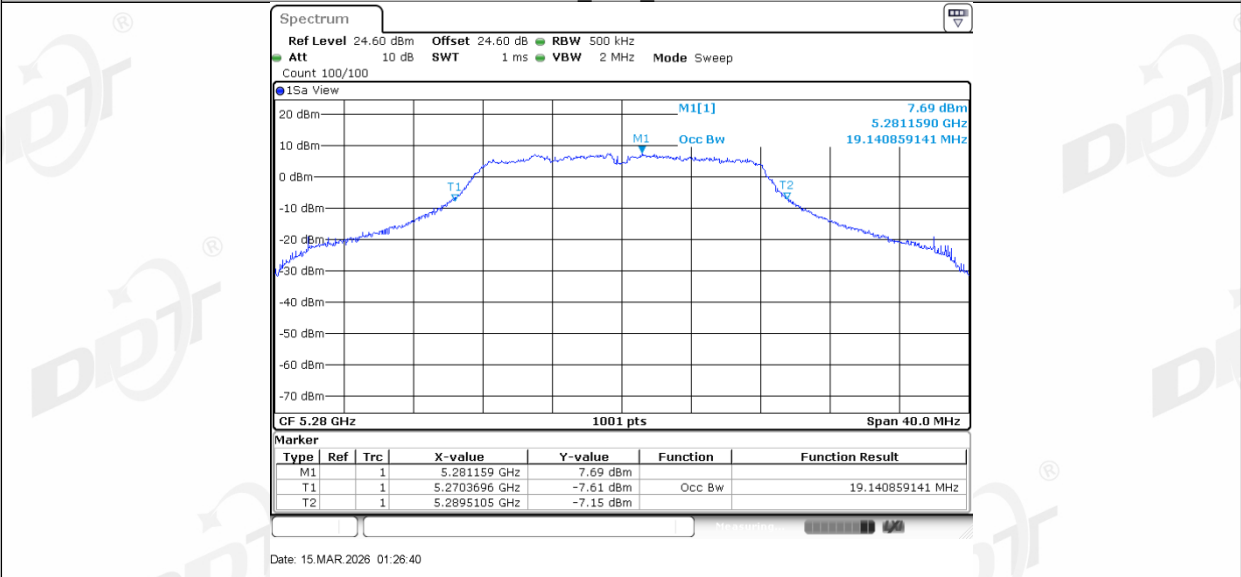


11A_Ant1_5320

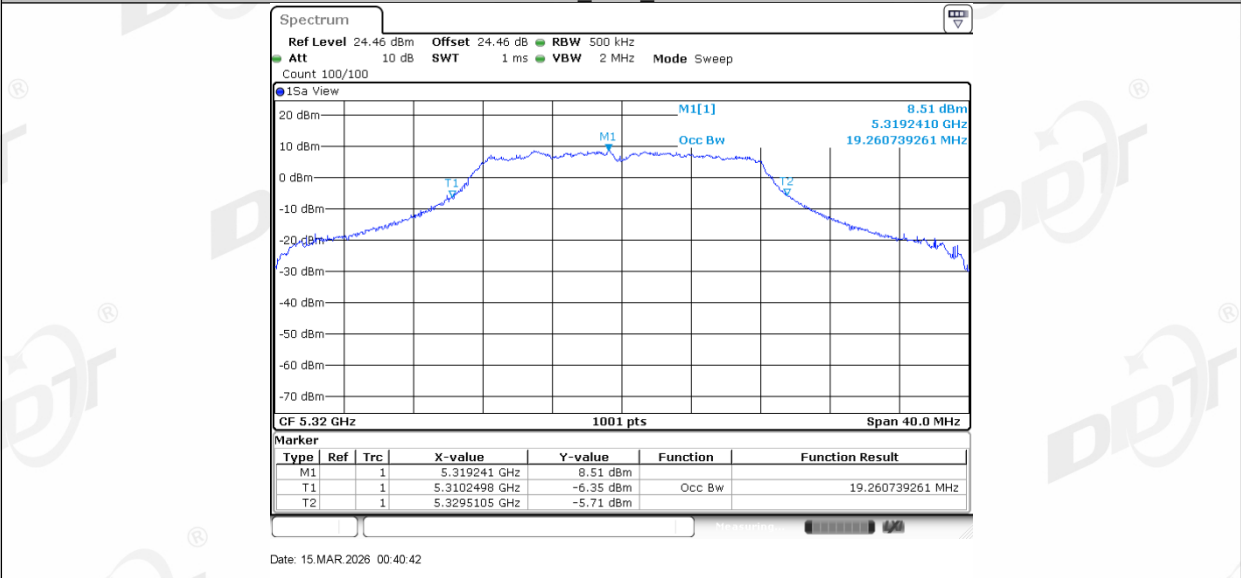


11A_Ant2_5320

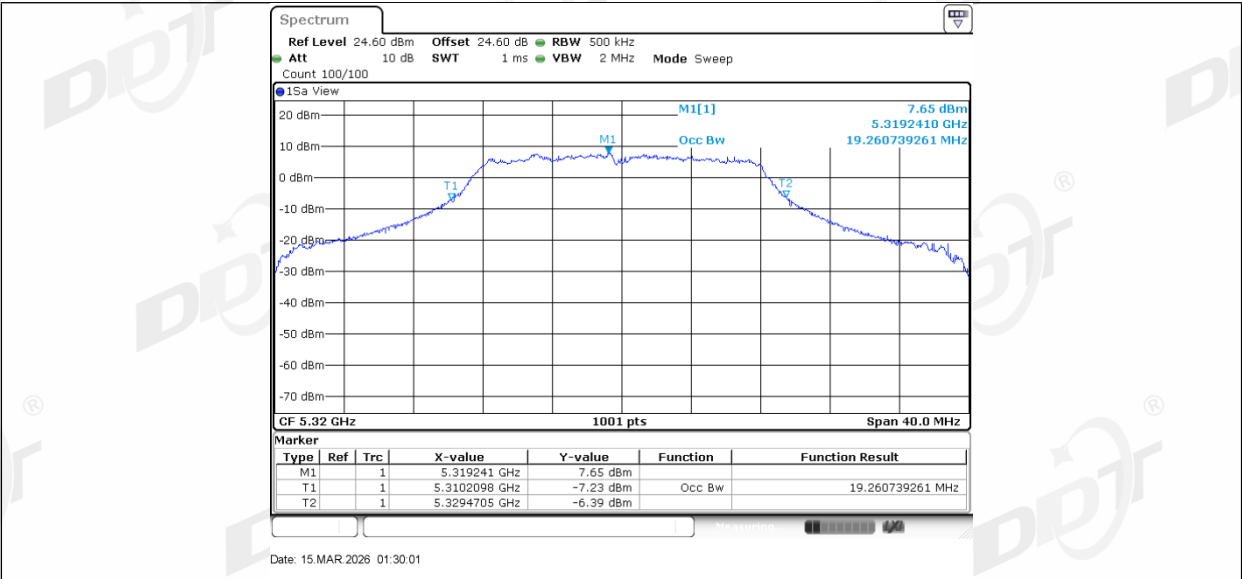


11A_Ant1_5500

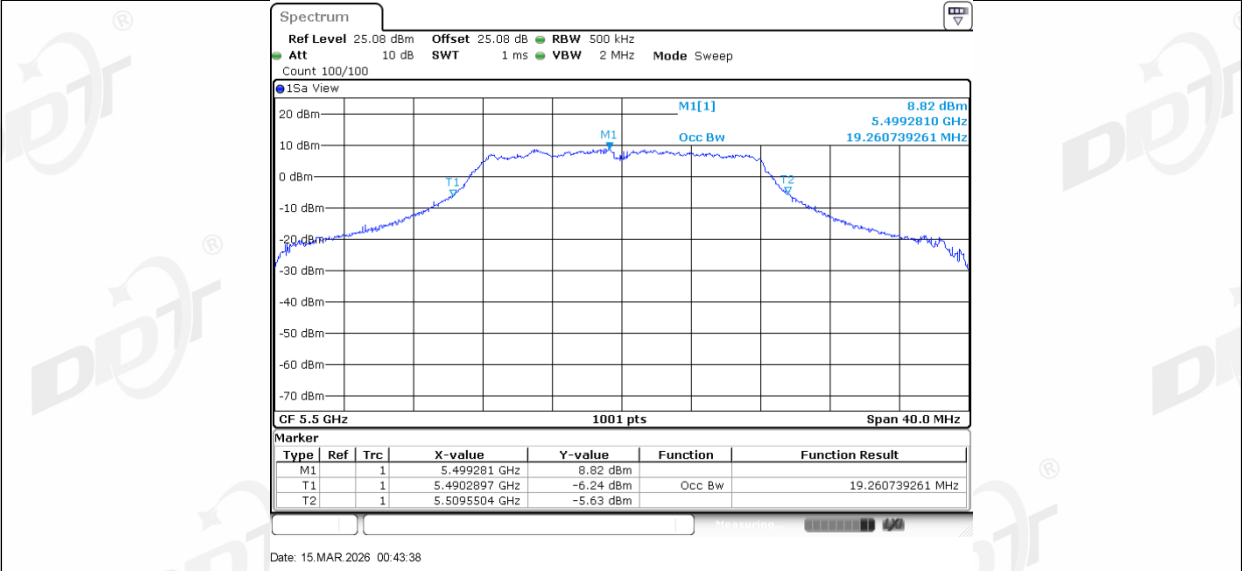


11A_Ant2_5500

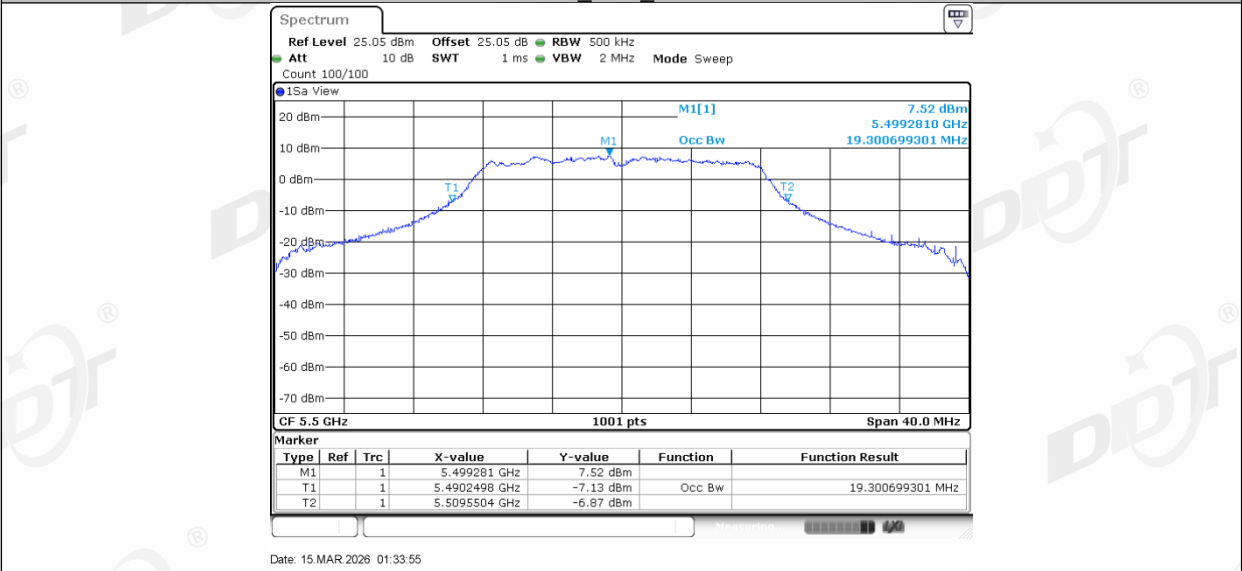


11A_Ant1_5580

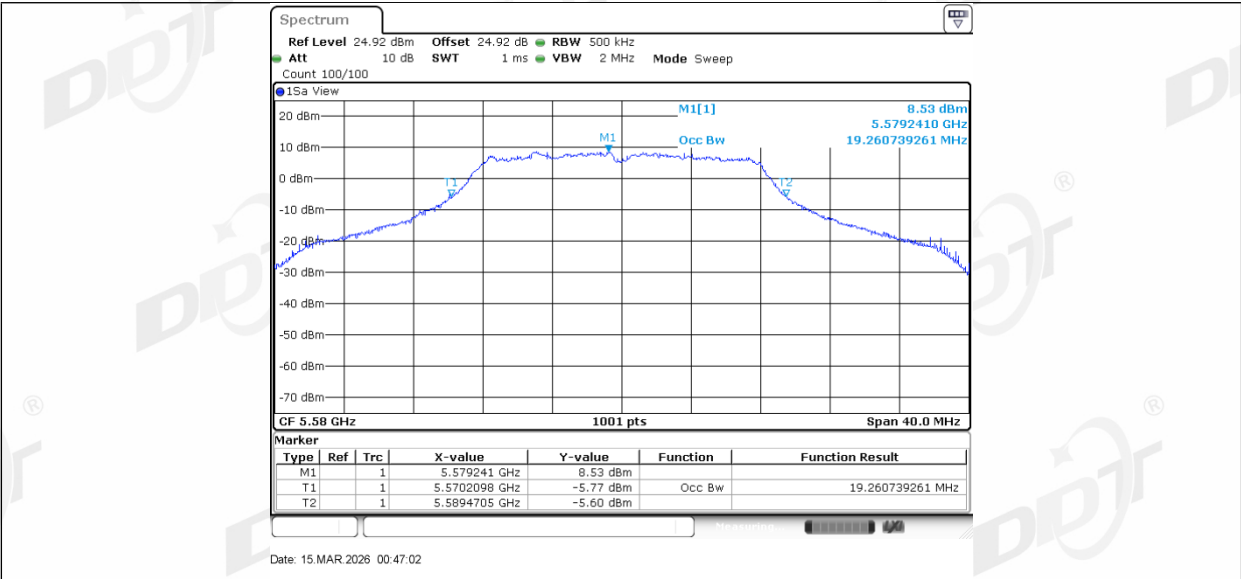

11A_Ant2_5580

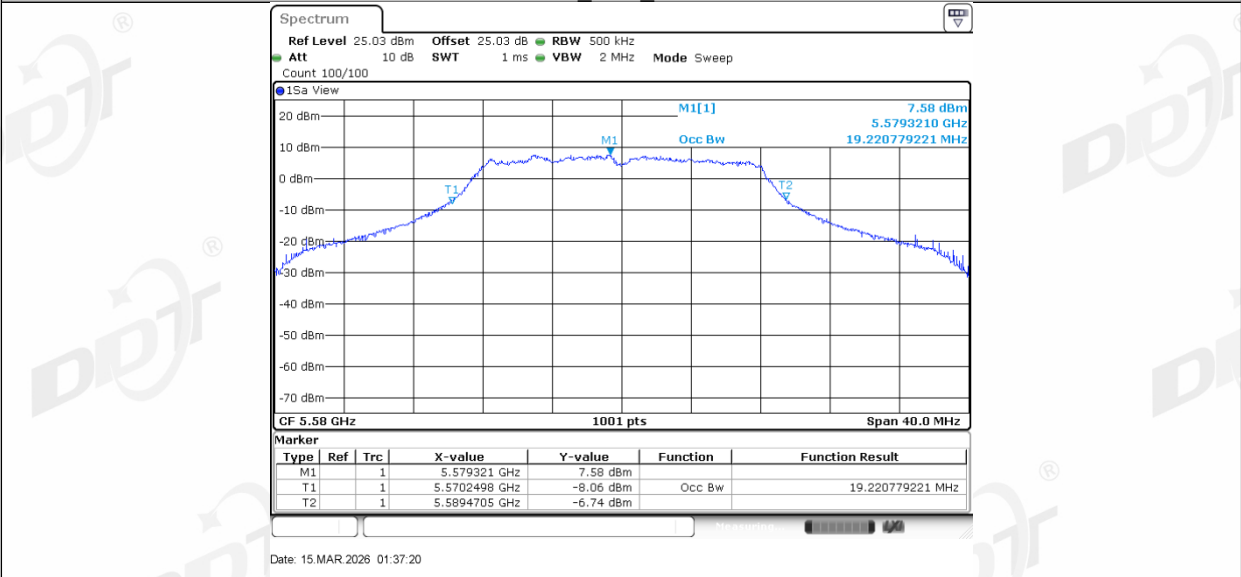

11A_Ant1_5700

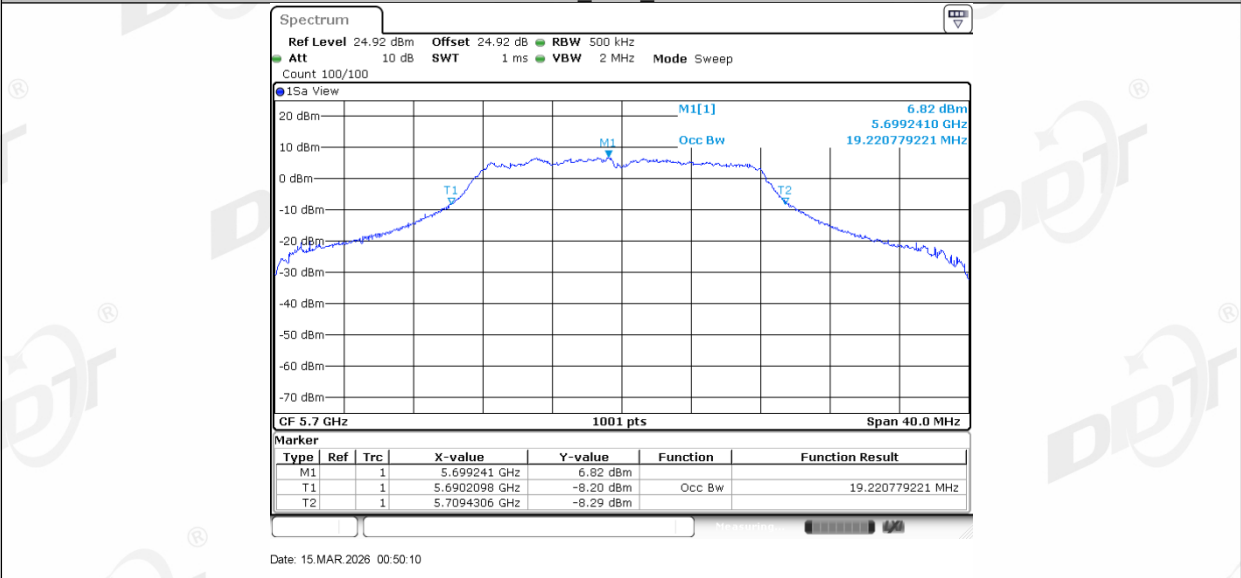

11A_Ant2_5700