




深圳市丰禾原电子科技有限公司 SUNITEC ENTERPRISE CO.,LTD.

Address: Building C No.725 , WeiXiangTai Industrial zone, FuCheng street ,
LongHua district , ShenZhen, GuangDong, China




VSWR 、 Return loss and impedance :

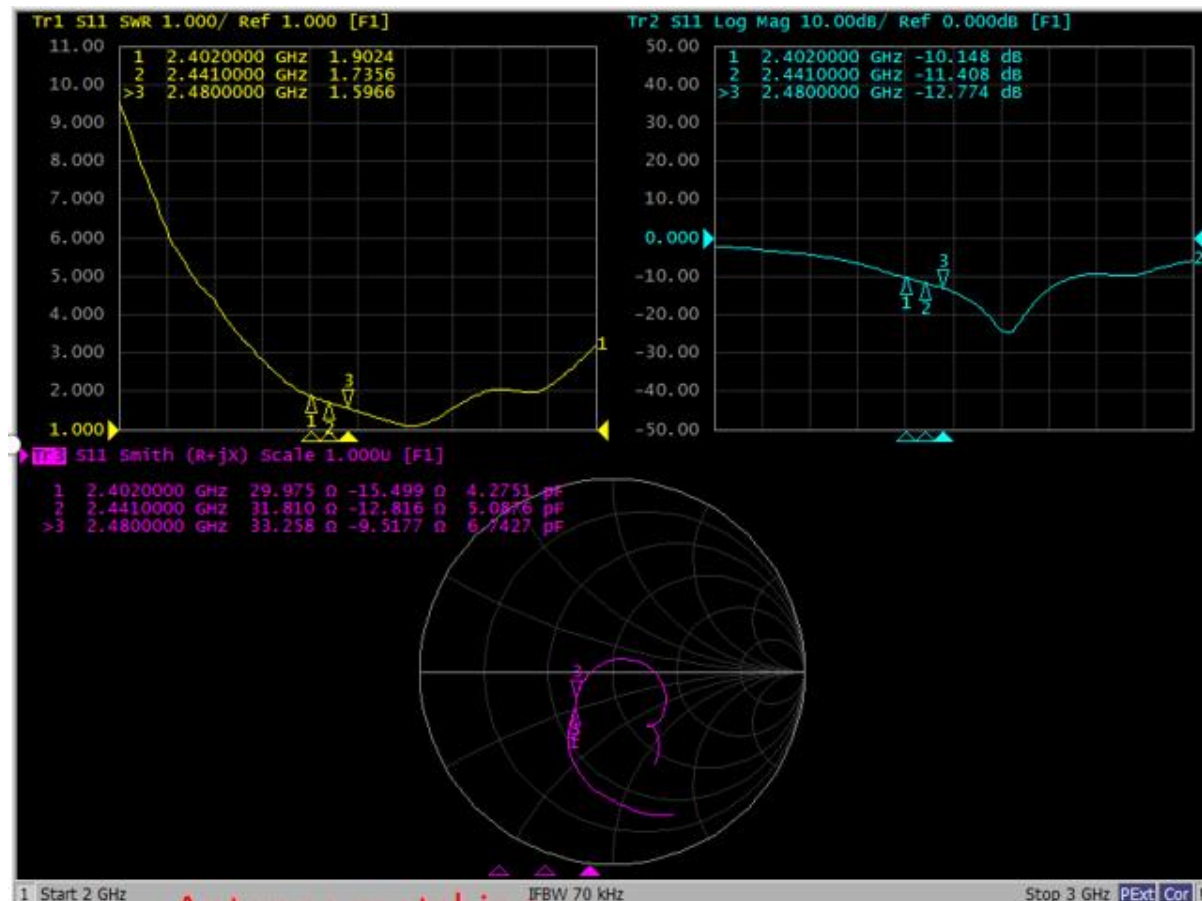



Antenna size :


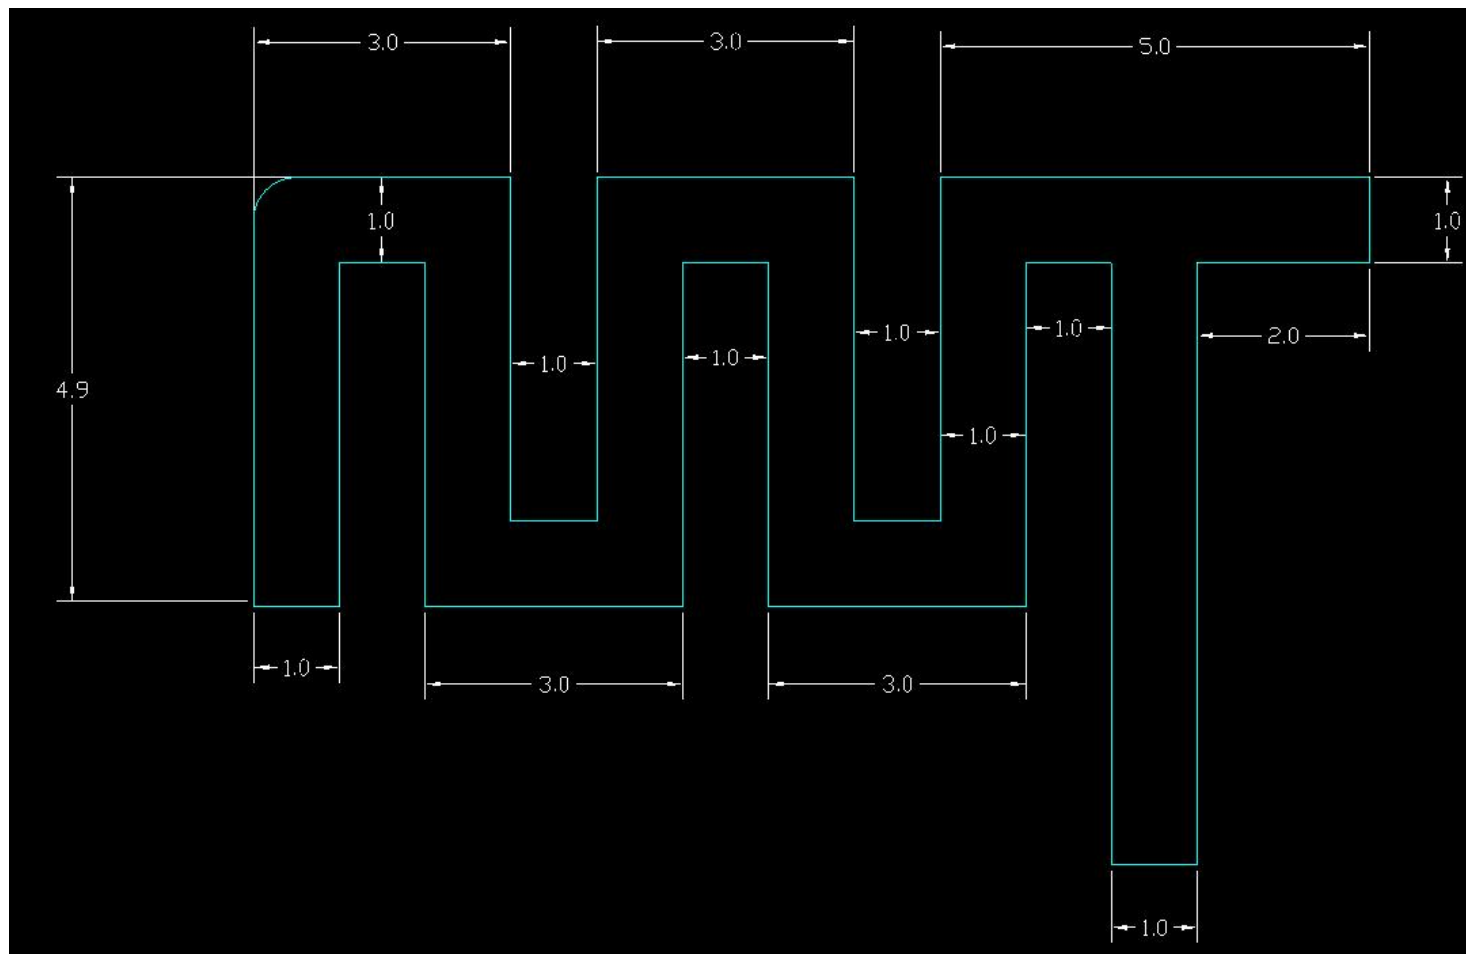


Unit: mm



JBL-GO5R RF Performance Test Report


ANT/ Test Settings:

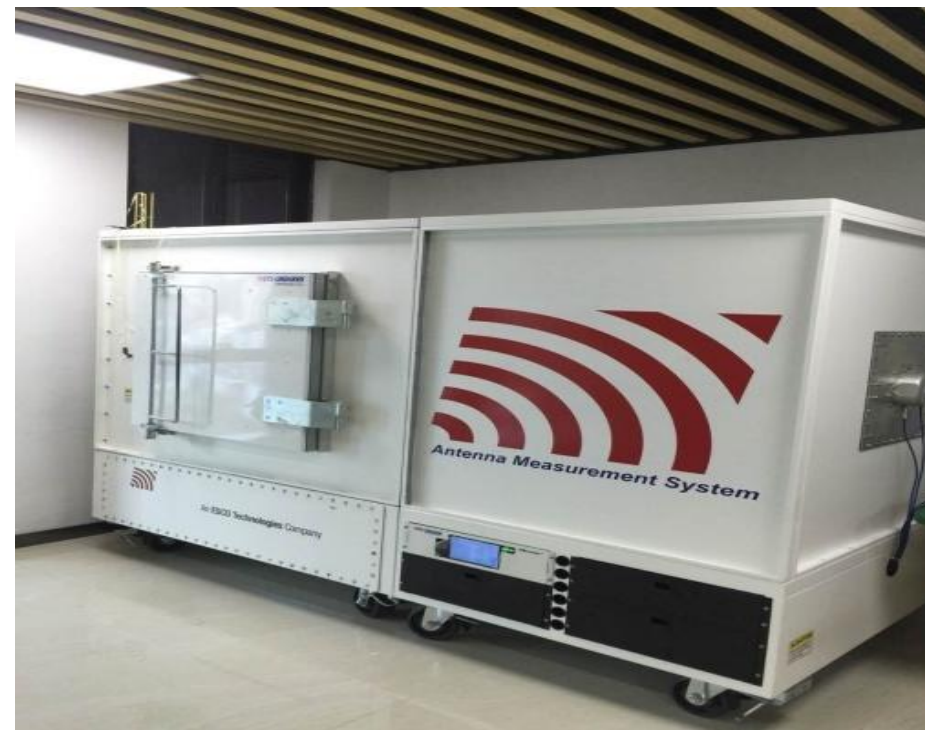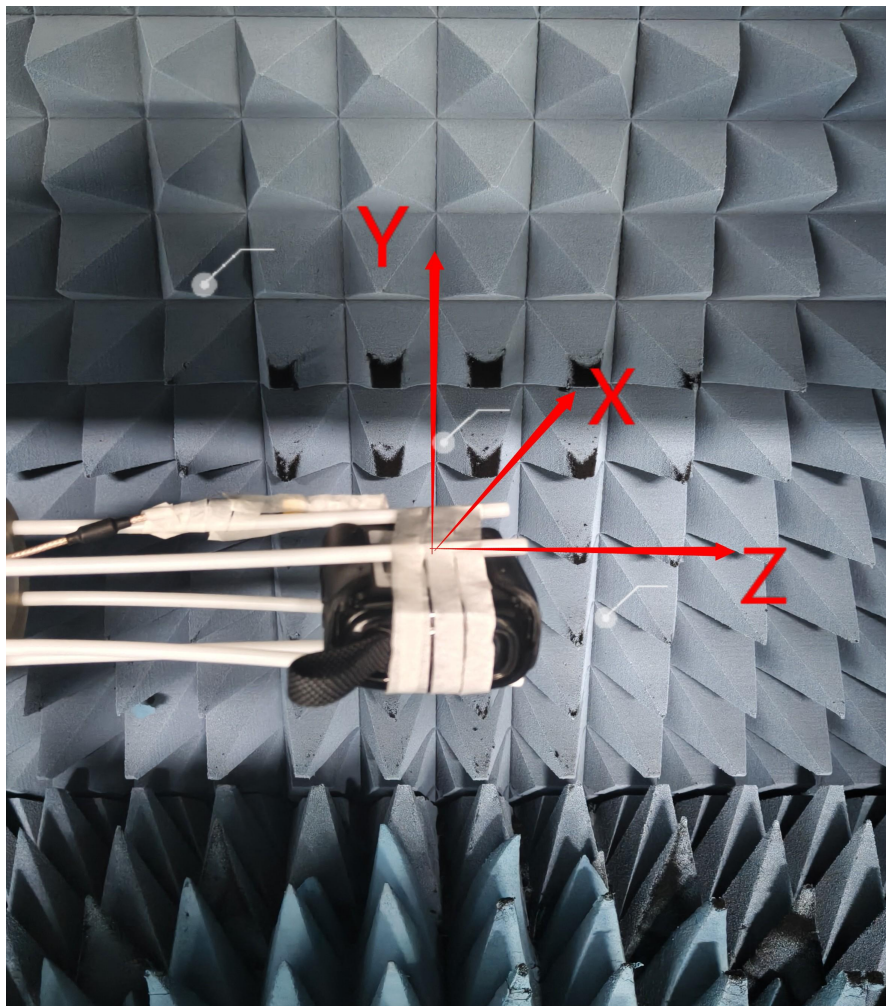




JBL-GO5R RF Performance Test Report

2441MHz ANT 3D Radiation Pattern:

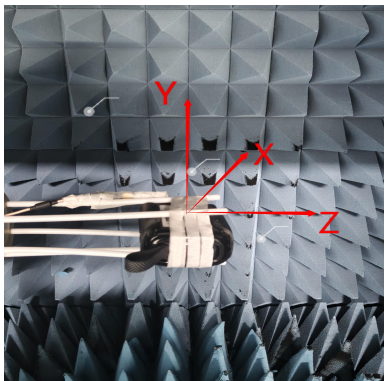


Total Power

Azimuth = 0.0
Elevation = 0.0
Roll = 90.0

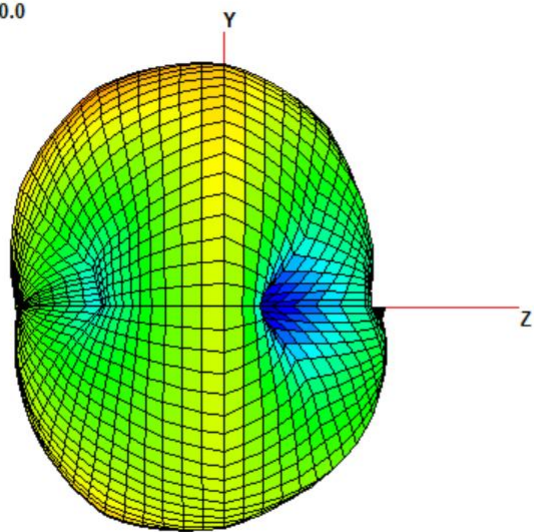


Total Power

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

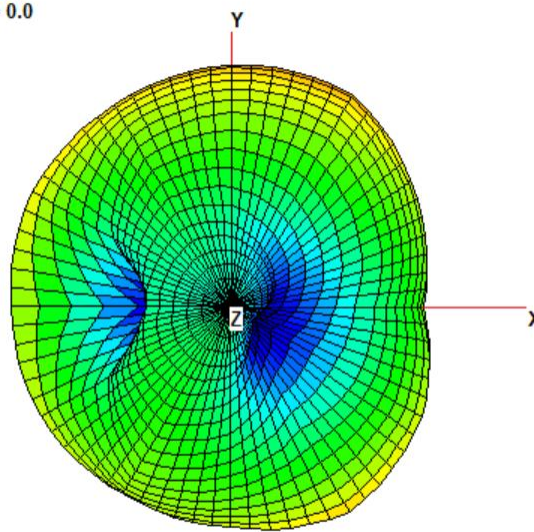

Total Power

Azimuth = 0.0
Elevation = 0.0
Roll = -90.0

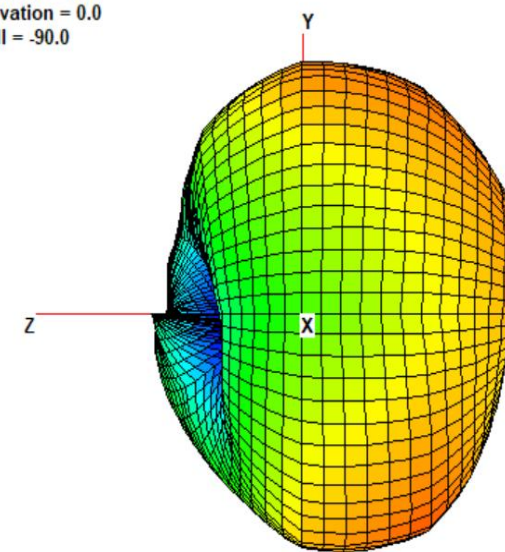

ANT DATA:

天线串OR		
Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400	60.0	1.0
2410	61.3	1.3
2420	62.3	1.5
2430	61.5	1.6
2440	62.1	1.8
2450	62.9	1.9
2460	65.4	2.2
2470	65.5	2.3
2480	65.2	2.4

TIS/TRP DATA:

天线串OR		
CH	TRP(dBm)	TIS(dBm)
0	7.2	-93.9
39	6.9	-94.2
78	6.9	-93.8

Conduction DATA:

CH	BR_POWER(dBm)	BR_Sensitivity(dBm)
0	9.4	-95.5
39	9.1	-95.5
78	8.5	-95.4

Thanks