APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Duty Cycle

Test Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor(dB)
802.11a	5500	98.76%	0.05
802. 11n HT20	5500	99.48%	0.02
802. 11n HT40	5510	99.50%	0.02
802. 11ac VHT80	5530	99.43%	0.02
802. 11ac VHT160	5570	99.44%	0.02
802. 11ax HE20	5500	99.47%	0.02
802. 11ax HE40	5510	99.46%	0.02
802. 11ax HE80	5530	99.54%	0.02
802. 11ax HE160	5570	99.48%	0.02

Output Power

NII2C

Mode	Tones/ RUIndex	Freq (MHz)	Ant	Conducted average power output(dBm)	EIRP (dBm)
802.11a	NA	5500	Ant7	10.54	8.54
			Ant8	11.11	11.11
		5580	Ant7	10.48	8.48
			Ant8	10.96	10.96
		5700	Ant7	10.85	8.85
			Ant8	11.82	11.82
		5720	Ant7	10.13	8.13
			Ant8	10.54	10.54
802.11n20M		5500	Ant7	10.63	8.63
			Ant8	10.91	10.91
			Ant7+Ant8	13.78	12.93
		5580	Ant7	10.68	8.68
			Ant8	10.87	10.87
			Ant7+Ant8	13.79	12.92
		5700	Ant7	11.02	9.02
			Ant8	11.64	11.64
			Ant7+Ant8	14.35	13.53
		5720	Ant7	10.04	8.04
			Ant8	10.45	10.45
			Ant7+Ant8	13.26	12.42
802.11n40M		5510	Ant7	10.76	8.76
			Ant8	10.84	10.84
			Ant7+Ant8	13.81	12.93
		5590	Ant7	10.66	8.66
			Ant8	10.83	10.83
			Ant7+Ant8	13.76	12.89
		5670	Ant7	11.04	9.04
			Ant8	11.35	11.35
			Ant7+Ant8	14.21	13.36
		5710	Ant7	10.20	8.20
			Ant8	10.52	10.52
			Ant7+Ant8	13.37	12.52
802.11ac80M		5530	Ant7	11.00	9.00
			Ant8	10.60	10.60

			Ant7+Ant8	13.81	12.88
		5610	Ant7	10.90	8.90
			Ant8	10.60	10.60
			Ant7+Ant8	13.76	12.84
		5690	Ant7	10.14	8.14
			Ant8	10.53	10.53
			Ant7+Ant8	13.35	12.51
802.11ac160M		5570	Ant7	11.32	9.32
			Ant8	10.81	10.81
			Ant7+Ant8	14.08	13.14

Mode	Tones/ RUIndex	Freq (MHz)	Ant	Conducted average power output(dBm)	EIRP (dBm)
802.11ax20M	26T/0	5500	Ant7	7.12	5.12
			Ant8	7.07	7.07
			Ant7+Ant8	10.11	9.21
		5580	Ant7	7.06	5.06
			Ant8	6.99	6.99
			Ant7+Ant8	10.04	9.14
		5700	Ant7	7.38	5.38
			Ant8	7.71	7.71
			Ant7+Ant8	10.56	9.71
		5720	Ant7	6.44	4.44
			Ant8	7.16	7.16
			Ant7+Ant8	9.83	9.02
	26T/4	5500	Ant7	6.65	4.65
			Ant8	6.66	6.66
			Ant7+Ant8	9.67	8.78
		5580	Ant7	6.58	4.58
			Ant8	6.45	6.45
			Ant7+Ant8	9.53	8.63
		5700	Ant7	6.97	4.97
			Ant8	7.16	7.16
			Ant7+Ant8	10.08	9.21
		5720	Ant7	6.03	4.03
			Ant8	6.68	6.68
			Ant7+Ant8	9.38	8.56
	26T/8	5500	Ant7	7.04	5.04
			Ant8	6.95	6.95
			Ant7+Ant8	10.01	9.11
		5580	Ant7	7.04	5.04
			Ant8	6.83	6.83
			Ant7+Ant8	9.95	9.04
		5700	Ant7	7.41	5.41
			Ant8	7.59	7.59
			Ant7+Ant8	10.51	9.65
		5720	Ant7	6.48	4.48
			Ant8	7.02	7.02
			Ant7+Ant8	9.77	8.94

	52T/37	5500	Ant7	6.77	4.77
			Ant8	6.84	6.84
			Ant7+Ant8	9.82	8.94
		5580	Ant7	6.83	4.83
			Ant8	6.82	6.82
			Ant7+Ant8	9.84	8.95
		5700	Ant7	7.24	5.24
			Ant8	7.51	7.51
			Ant7+Ant8	10.39	9.53
		5720	Ant7	6.38	4.38
			Ant8	6.98	6.98
			Ant7+Ant8	9.70	8.88
	52T/39	5500	Ant7	6.62	4.62
			Ant8	6.65	6.65
			Ant7+Ant8	9.65	8.76
		5580	Ant7	6.71	4.71
			Ant8	6.49	6.49
			Ant7+Ant8	9.61	8.70
		5700	Ant7	7.02	5.02
			Ant8	7.27	7.27
			Ant7+Ant8	10.16	9.30
		5720	Ant7	6.17	4.17
			Ant8	6.63	6.63
			Ant7+Ant8	9.42	8.58
	52T/40	5500	Ant7	6.60	4.60
			Ant8	6.96	6.96
			Ant7+Ant8	9.79	8.95
		5580	Ant7	6.99	4.99
			Ant8	6.75	6.75
			Ant7+Ant8	9.88	8.97
		5700	Ant7	7.20	5.20
			Ant8	7.45	7.45
			Ant7+Ant8	10.34	9.48
		5720	Ant7	6.38	4.38
			Ant8	6.79	6.79
			Ant7+Ant8	9.60	8.76
	106T/53	5500	Ant7	6.71	4.71
			Ant8	7.07	7.07
			Ant7+Ant8	9.90	9.06

		5580	Ant7	6.96	4.96
			Ant8	6.79	6.79
			Ant7+Ant8	9.89	8.98
		5700	Ant7	7.22	5.22
			Ant8	7.48	7.48
			Ant7+Ant8	10.36	9.51
		5720	Ant7	6.38	4.38
			Ant8	6.88	6.88
			Ant7+Ant8	9.65	8.82
	106T/54	5500	Ant7	6.72	4.72
			Ant8	6.91	6.91
			Ant7+Ant8	9.83	8.96
		5580	Ant7	6.92	4.92
			Ant8	6.78	6.78
			Ant7+Ant8	9.86	8.96
		5700	Ant7	7.30	5.30
			Ant8	7.41	7.41
			Ant7+Ant8	10.37	9.49
		5720	Ant7	6.49	4.49
			Ant8	6.78	6.78
			Ant7+Ant8	9.65	8.79
	242T/61	5500	Ant7	10.94	8.94
			Ant8	10.75	10.75
			Ant7+Ant8	13.86	12.95
		5580	Ant7	10.89	8.89
			Ant8	10.82	10.82
			Ant7+Ant8	13.87	12.97
		5700	Ant7	11.16	9.16
			Ant8	11.63	11.63
			Ant7+Ant8	14.41	13.58
		5720	Ant7	10.16	8.16
			Ant8	10.54	10.54
			Ant7+Ant8	13.36	12.52

Mode	Tones/ RUIndex	Freq (MHz)	Ant	Conducted average power output(dBm)	EIRP (dBm)
802.11ax40M	26T/0	5510	Ant7	6.92	4.92
			Ant8	7.06	7.06
			Ant7+Ant8	10.00	9.13

		5670	Ant7	7.33	5.33
			Ant8	7.76	7.76
			Ant7+Ant8	10.56	9.72
		5710	Ant7	6.28	4.28
			Ant8	7.23	7.23
			Ant7+Ant8	9.79	9.01
	26T/10	5510	Ant7	6.76	4.76
			Ant8	6.74	6.74
			Ant7+Ant8	9.76	8.87
		5670	Ant7	7.29	5.29
			Ant8	7.55	7.55
			Ant7+Ant8	10.43	9.58
		5710	Ant7	6.05	4.05
			Ant8	6.91	6.91
			Ant7+Ant8	9.51	8.72
	26T/17	5510	Ant7	6.96	4.96
			Ant8	6.83	6.83
			Ant7+Ant8	9.91	9.01
		5670	Ant7	7.40	5.40
			Ant8	7.69	7.69
			Ant7+Ant8	10.56	9.70
		5710	Ant7	6.26	4.26
			Ant8	7.01	7.01
			Ant7+Ant8	9.66	8.86
	52T/37	5510	Ant7	6.91	4.91
			Ant8	7.13	7.13
			Ant7+Ant8	10.03	9.17
		5670	Ant7	7.44	5.44
			Ant8	7.85	7.85
			Ant7+Ant8	10.66	9.82
		5710	Ant7	6.38	4.38
			Ant8	7.29	7.29
			Ant7+Ant8	9.87	9.08
	52T/41	5510	Ant7	6.74	4.74
			Ant8	6.75	6.75
			Ant7+Ant8	9.76	8.87
		5670	Ant7	7.29	5.29
			Ant8	7.59	7.59
			Ant7+Ant8	10.45	9.60

		5710	Ant7	6.13	4.13
			Ant8	7.04	7.04
			Ant7+Ant8	9.62	8.83
	52T/44	5510	Ant7	6.97	4.97
			Ant8	6.88	6.88
			Ant7+Ant8	9.94	9.04
		5670	Ant7	7.44	5.44
			Ant8	7.76	7.76
			Ant7+Ant8	10.61	9.76
		5710	Ant7	6.31	4.31
			Ant8	7.12	7.12
			Ant7+Ant8	9.74	8.95
	106T/53	5510	Ant7	7.11	5.11
			Ant8	7.01	7.01
			Ant7+Ant8	10.07	9.17
		5670	Ant7	7.33	5.33
			Ant8	7.89	7.89
			Ant7+Ant8	10.63	9.81
		5710	Ant7	6.40	4.40
			Ant8	7.30	7.30
			Ant7+Ant8	9.88	9.10
	106T/55	5510	Ant7	6.93	4.93
			Ant8	6.78	6.78
			Ant7+Ant8	9.87	8.96
		5670	Ant7	7.23	5.23
			Ant8	7.68	7.68
			Ant7+Ant8	10.47	9.64
		5710	Ant7	6.28	4.28
			Ant8	7.09	7.09
			Ant7+Ant8	9.71	8.92
	106T/56	5510	Ant7	7.08	5.08
			Ant8	6.91	6.91
			Ant7+Ant8	10.01	9.10
		5670	Ant7	7.37	5.37
			Ant8	7.77	7.77
			Ant7+Ant8	10.58	9.74
		5710	Ant7	6.37	4.37
			Ant8	7.14	7.14
			Ant7+Ant8	9.78	8.98

	242T/61	5510	Ant7	6.93	4.93
			Ant8	6.95	6.95
			Ant7+Ant8	9.95	9.07
		5670	Ant7	7.18	5.18
			Ant8	7.72	7.72
			Ant7+Ant8	10.47	9.64
		5710	Ant7	6.25	4.25
			Ant8	7.16	7.16
			Ant7+Ant8	9.74	8.95
	242T/62	5510	Ant7	6.94	4.94
			Ant8	6.77	6.77
			Ant7+Ant8	9.87	8.96
		5670	Ant7	7.26	5.26
			Ant8	7.59	7.59
			Ant7+Ant8	10.44	9.59
		5710	Ant7	6.19	4.19
			Ant8	7.04	7.04
			Ant7+Ant8	9.65	8.86
	484T/65	5510	Ant7	10.99	8.99
			Ant8	11.26	11.26
			Ant7+Ant8	14.14	13.28
		5670	Ant7	11.44	9.44
			Ant8	11.68	11.68
			Ant7+Ant8	14.57	13.71
		5710	Ant7	10.08	8.08
			Ant8	10.48	10.48
			Ant7+Ant8	13.29	12.45

Mode	Tones/ RUIndex	Freq (MHz)	Ant	Conducted average power output(dBm)	EIRP (dBm)
802.11ax80M	26T/0	5530	Ant7	7.23	5.23
			Ant8	7.29	7.29
			Ant7+Ant8	10.27	9.39
		5610	Ant7	6.95	4.95
			Ant8	7.50	7.50
			Ant7+Ant8	10.24	9.42
		5690	Ant7	6.55	4.55
			Ant8	6.97	6.97
			Ant7+Ant8	9.78	8.94

	26T/18	5530	Ant7	7.10	5.10
			Ant8	6.92	6.92
			Ant7+Ant8	10.02	9.11
		5610	Ant7	7.00	5.00
			Ant8	7.19	7.19
			Ant7+Ant8	10.11	9.24
		5690	Ant7	6.37	4.37
			Ant8	6.74	6.74
			Ant7+Ant8	9.57	8.73
	26T/36	5530	Ant7	7.37	5.37
			Ant8	6.90	6.90
			Ant7+Ant8	10.15	9.21
		5610	Ant7	7.34	5.34
			Ant8	7.40	7.40
			Ant7+Ant8	10.38	9.50
		5690	Ant7	6.43	4.43
			Ant8	6.69	6.69
			Ant7+Ant8	9.57	8.72
	52T/37	5530	Ant7	7.25	5.25
			Ant8	7.27	7.27
			Ant7+Ant8	10.27	9.39
		5610	Ant7	7.02	5.02
			Ant8	7.56	7.56
			Ant7+Ant8	10.31	9.48
		5690	Ant7	6.56	4.56
			Ant8	7.06	7.06
			Ant7+Ant8	9.83	9.00
	52T/45	5530	Ant7	7.11	5.11
			Ant8	6.90	6.90
			Ant7+Ant8	10.02	9.11
		5610	Ant7	7.02	5.02
			Ant8	7.29	7.29
			Ant7+Ant8	10.17	9.31
		5690	Ant7	6.41	4.41
			Ant8	6.78	6.78
			Ant7+Ant8	9.61	8.77
	52T/52	5530	Ant7	7.38	5.38
			Ant8	6.86	6.86
			Ant7+Ant8	10.14	9.19

		5610	Ant7	7.36	5.36
			Ant8	7.34	7.34
			Ant7+Ant8	10.36	9.47
		5690	Ant7	6.49	4.49
			Ant8	6.72	6.72
			Ant7+Ant8	9.62	8.76
	106T/53	5530	Ant7	7.31	5.31
			Ant8	7.34	7.34
			Ant7+Ant8	10.34	9.45
		5610	Ant7	6.95	4.95
			Ant8	7.49	7.49
			Ant7+Ant8	10.24	9.41
		5690	Ant7	6.56	4.56
			Ant8	6.95	6.95
			Ant7+Ant8	9.77	8.93
	106T/57	5530	Ant7	7.17	5.17
			Ant8	6.97	6.97
			Ant7+Ant8	10.08	9.17
		5610	Ant7	7.01	5.01
			Ant8	7.16	7.16
			Ant7+Ant8	10.10	9.23
		5690	Ant7	6.48	4.48
			Ant8	6.69	6.69
			Ant7+Ant8	9.60	8.73
	106T/60	5530	Ant7	7.32	5.32
			Ant8	6.96	6.96
			Ant7+Ant8	10.15	9.23
		5610	Ant7	7.32	5.32
			Ant8	7.35	7.35
			Ant7+Ant8	10.35	9.46
		5690	Ant7	6.50	4.50
			Ant8	6.68	6.68
			Ant7+Ant8	9.60	8.74
	242T/61	5530	Ant7	7.17	5.17
			Ant8	7.23	7.23
			Ant7+Ant8	10.21	9.33
		5610	Ant7	6.94	4.94
			Ant8	7.40	7.40
			Ant7+Ant8	10.19	9.35

		5690	Ant7	6.53	4.53
			Ant8	6.95	6.95
			Ant7+Ant8	9.76	8.92
	242T/63	5530	Ant7	7.15	5.15
			Ant8	6.92	6.92
			Ant7+Ant8	10.05	9.13
		5610	Ant7	7.08	5.08
			Ant8	7.14	7.14
			Ant7+Ant8	10.12	9.24
		5690	Ant7	6.46	4.46
			Ant8	6.77	6.77
			Ant7+Ant8	9.63	8.78
	242T/64	5530	Ant7	7.23	5.23
			Ant8	6.98	6.98
			Ant7+Ant8	10.12	9.20
		5610	Ant7	7.24	5.24
			Ant8	7.24	7.24
			Ant7+Ant8	10.25	9.36
		5690	Ant7	6.50	4.50
			Ant8	6.74	6.74
			Ant7+Ant8	9.63	8.77
	484T/65	5530	Ant7	7.06	5.06
			Ant8	7.13	7.13
			Ant7+Ant8	10.11	9.23
		5610	Ant7	6.85	4.85
			Ant8	7.15	7.15
			Ant7+Ant8	10.01	9.16
		5690	Ant7	6.48	4.48
			Ant8	6.83	6.83
			Ant7+Ant8	9.67	8.82
	484T/66	5530	Ant7	7.14	5.14
			Ant8	7.04	7.04
			Ant7+Ant8	10.10	9.20
		5610	Ant7	7.11	5.11
			Ant8	7.19	7.19
			Ant7+Ant8	10.16	9.28
		5690	Ant7	6.47	4.47
			Ant8	6.71	6.71
			Ant7+Ant8	9.60	8.74

	996T/67	5530	Ant7	10.19	8.19
			Ant8	10.56	10.56
			Ant7+Ant8	13.39	12.55
		5610	Ant7	10.31	8.31
			Ant8	10.81	10.81
			Ant7+Ant8	13.58	12.75
		5690	Ant7	10.21	8.21
			Ant8	10.61	10.61
			Ant7+Ant8	13.42	12.58

Mode	Tones/ RUIndex	Freq (MHz)	Ant	Conducted average power output(dBm)	EIRP (dBm)
802.11ax160M	26T/L	5570	Ant7	7.43	5.43
			Ant8	7.33	7.33
			Ant7+Ant8	10.39	9.49
	26T/H		Ant7	7.87	5.87
			Ant8	6.99	6.99
			Ant7+Ant8	10.46	9.48
	52T/L		Ant7	7.45	5.45
			Ant8	7.33	7.33
			Ant7+Ant8	10.40	9.50
	52T/H		Ant7	7.84	5.84
			Ant8	6.96	6.96
			Ant7+Ant8	10.43	9.45
	106T/L		Ant7	7.40	5.40
			Ant8	7.37	7.37
			Ant7+Ant8	10.40	9.51
	106T/H		Ant7	7.77	5.77
			Ant8	6.99	6.99
			Ant7+Ant8	10.41	9.43
	242T/L		Ant7	7.38	5.38
			Ant8	7.34	7.34
			Ant7+Ant8	10.37	9.48
	242T/H		Ant7	7.70	5.70
			Ant8	6.94	6.94
			Ant7+Ant8	10.35	9.37
	484T/L		Ant7	7.21	5.21
			Ant8	7.11	7.11

			Ant7+Ant8	10.17	9.27
	484T/H		Ant7	7.48	5.48
			Ant8	6.72	6.72
			Ant7+Ant8	10.13	9.15
	996T/L		Ant7	7.05	5.05
			Ant8	6.83	6.83
			Ant7+Ant8	9.95	9.04
	996T/H		Ant7	7.21	5.21
			Ant8	6.54	6.54
			Ant7+Ant8	9.90	8.94
	1992T/L&H		Ant7	10.87	8.87
			Ant8	10.84	10.84
			Ant7+Ant8	13.87	12.98

Emission Bandwidth

Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 1dB

Test Mode:802.11a

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5500	Ant7	19.46
	Ant8	19.45
5580	Ant7	19.51
	Ant8	19.76
5700	Ant7	19.79
	Ant8	20.22
5720	Ant7	19.17
	Ant8	19.81

Test Mode:802.11a Ant7

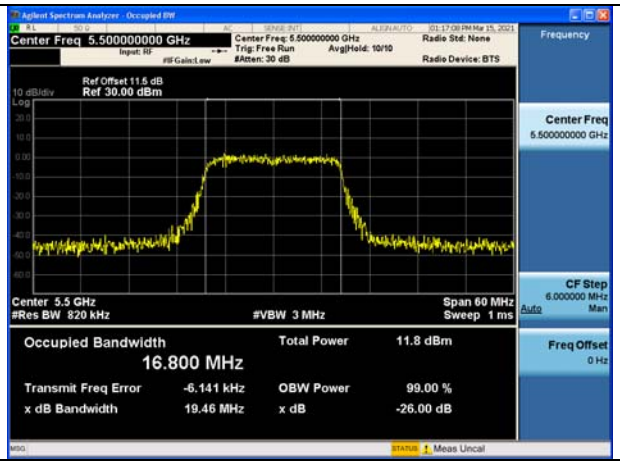

Test Mode:802.11a Ant7

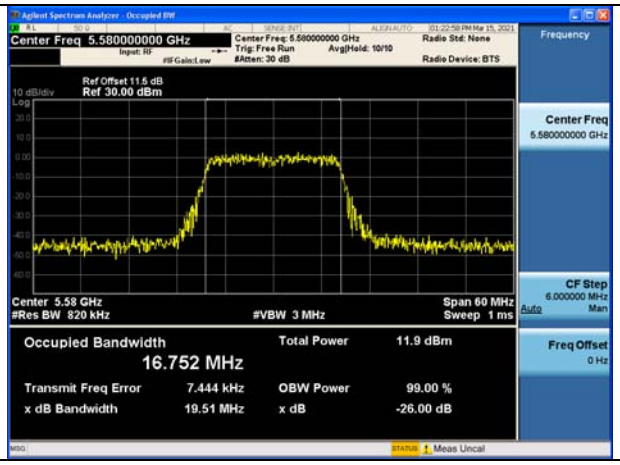

Test Mode:802.11a Ant7

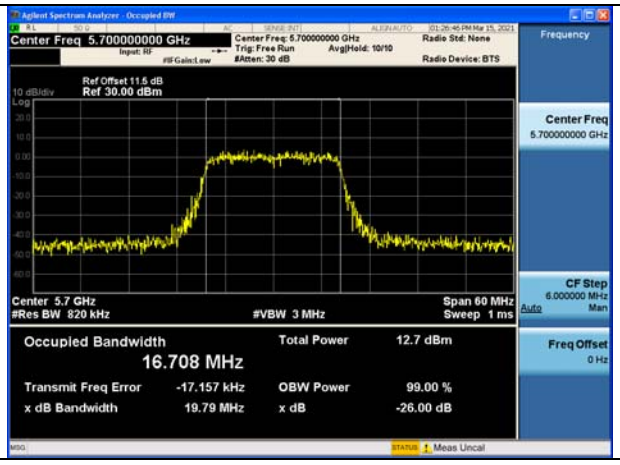

Test Mode:802.11a Ant7

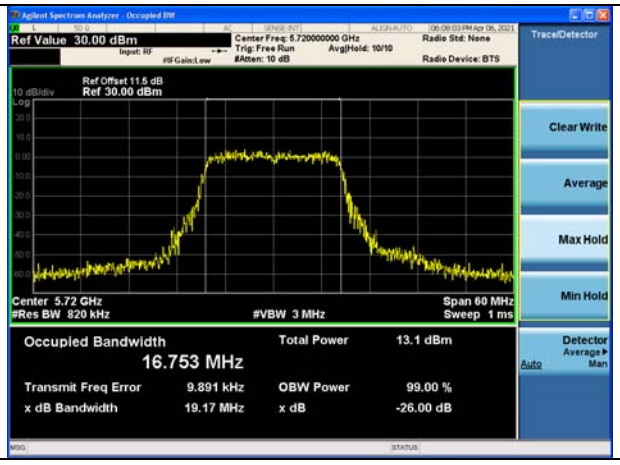

Test Mode:802.11a Ant8

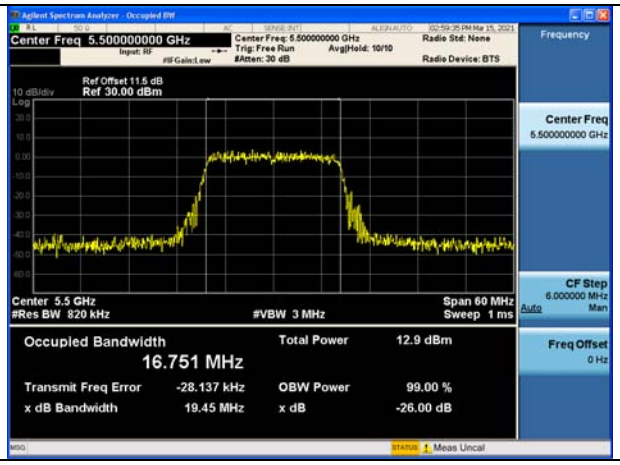

Test Mode:802.11a Ant8

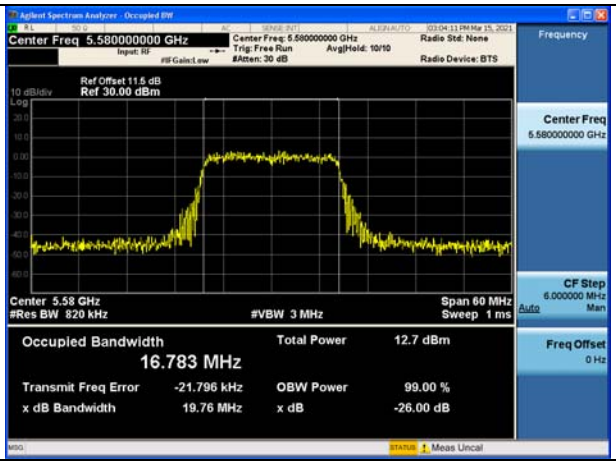

Test Mode:802.11a Ant8

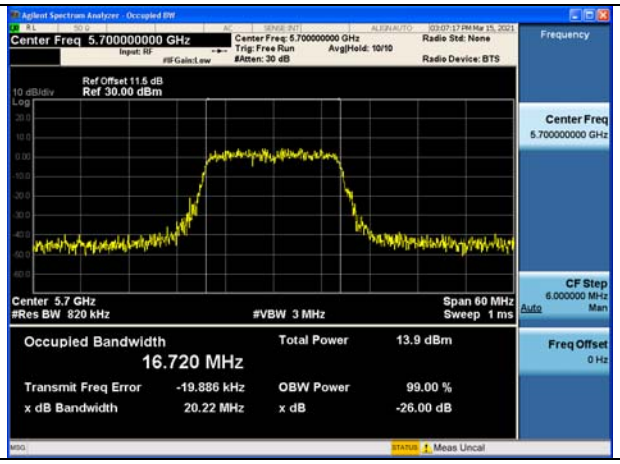

Test Mode:802.11a Ant8

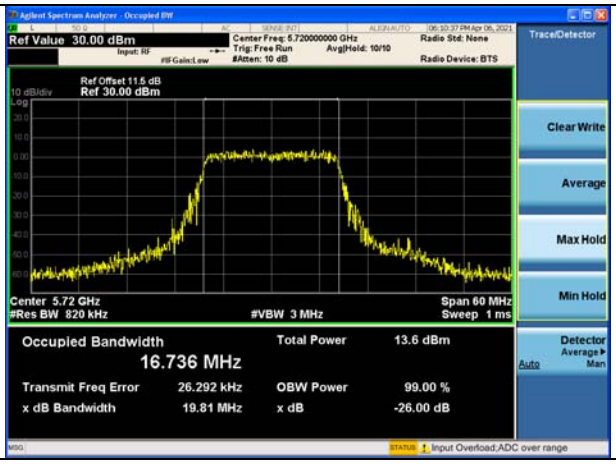

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5500	Ant7	20.62
	Ant8	21.10
5580	Ant7	20.77
	Ant8	21.03
5700	Ant7	20.46
	Ant8	20.29
5710	Ant7	20.66
	Ant8	21.81

Test Mode:802. 11n HT20 Ant7

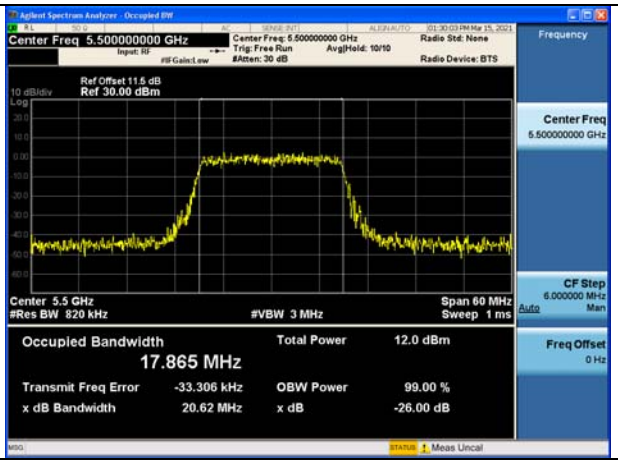

Test Mode:802. 11n HT20 Ant7

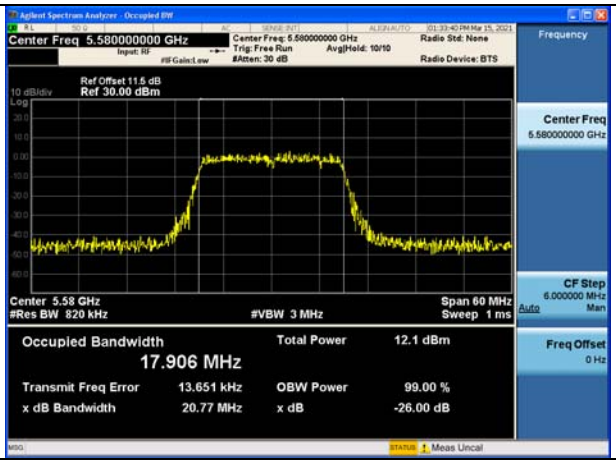

Test Mode:802. 11n HT20 Ant7

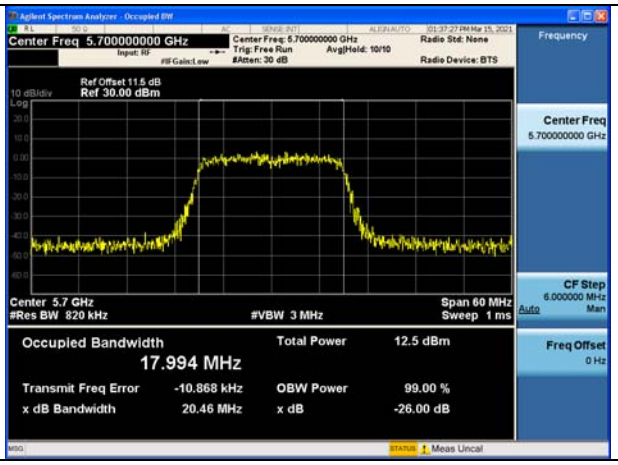

Test Mode:802. 11n HT20 Ant7

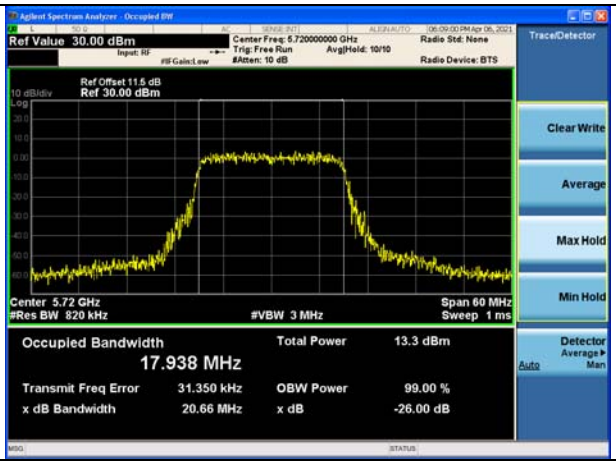

Test Mode:802. 11n HT20 Ant8

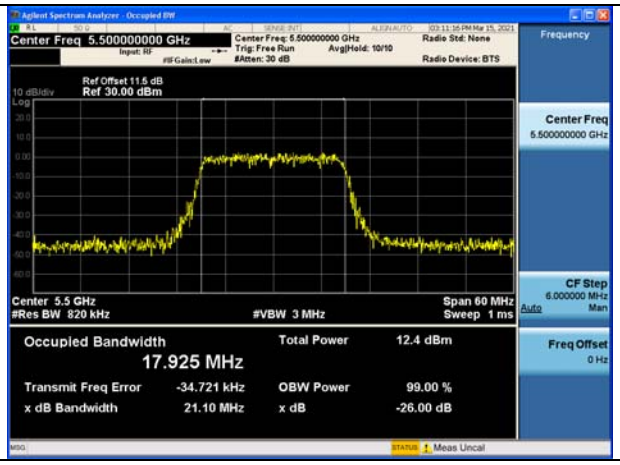

Test Mode:802. 11n HT20 Ant8

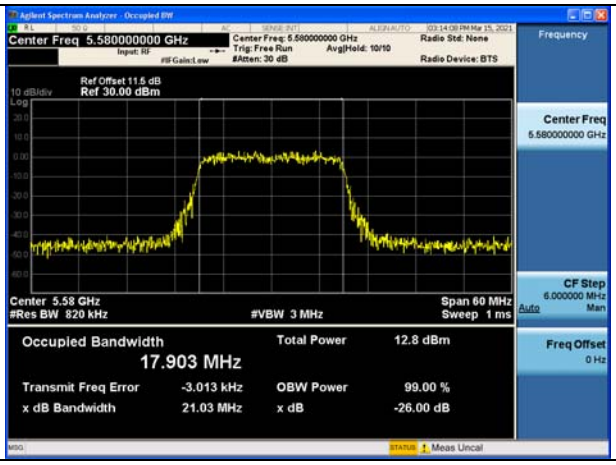

Test Mode:802. 11n HT20 Ant8

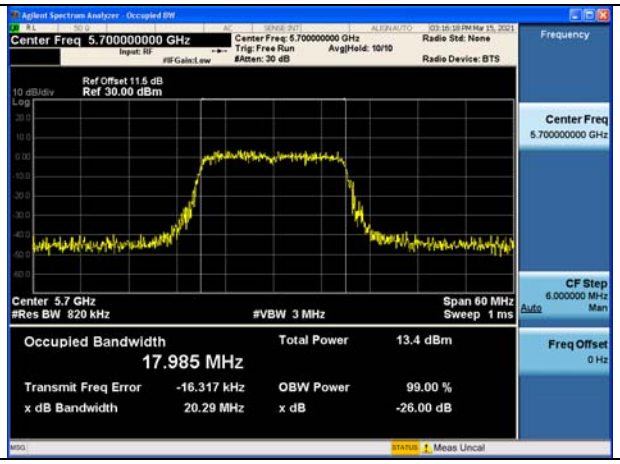

Test Mode:802. 11n HT20 Ant8

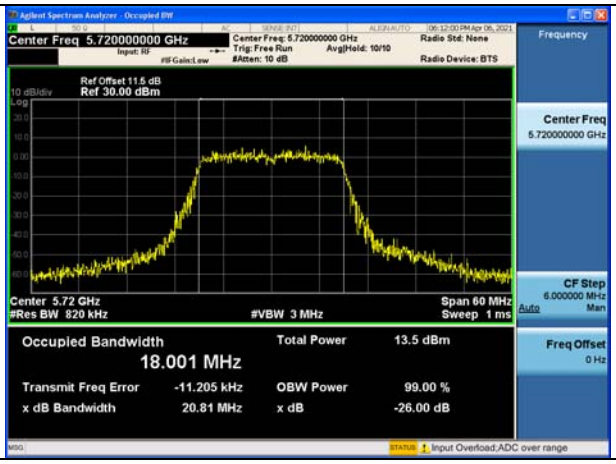

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5510	Ant7	39.42
	Ant8	40.12
5590	Ant7	39.55
	Ant8	39.16
5670	Ant7	39.34
	Ant8	39.88
5710	Ant7	39.34
	Ant8	39.79

Test Mode:802. 11n HT40 Ant7

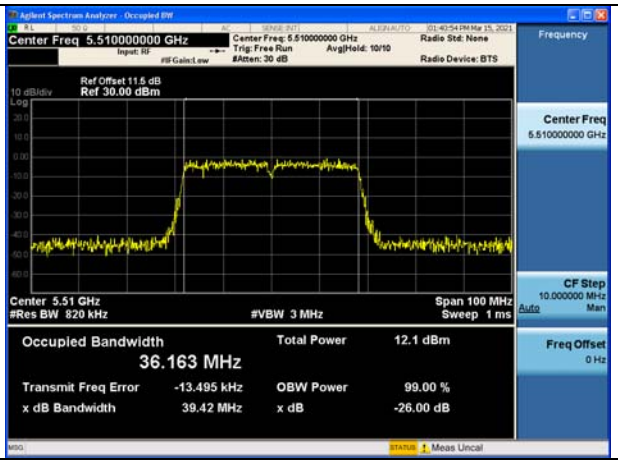

Test Mode:802. 11n HT40 Ant7

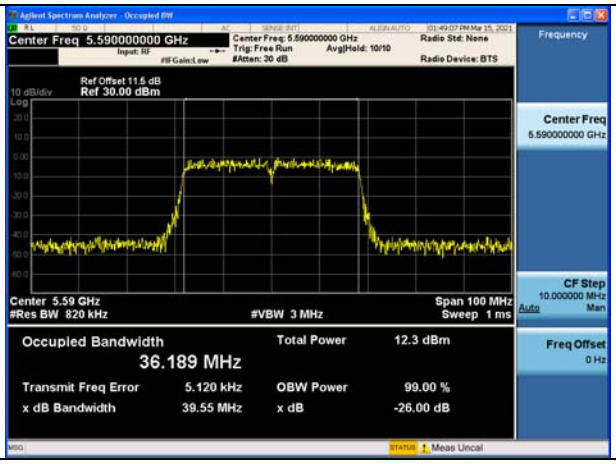

Test Mode:802. 11n HT40 Ant7

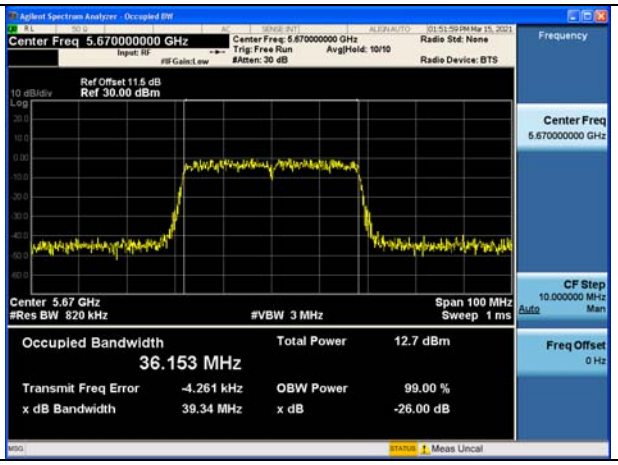

Test Mode:802. 11n HT40 Ant7

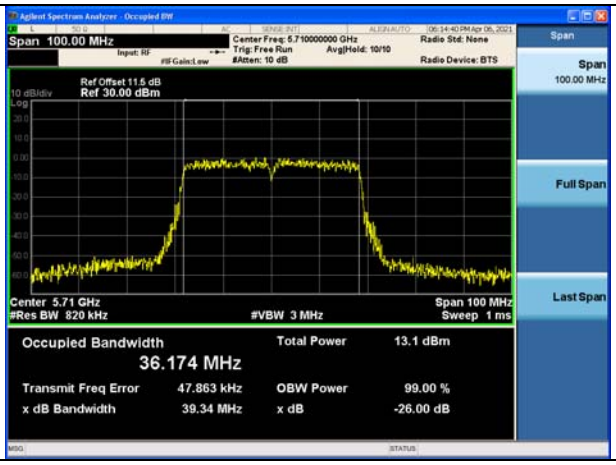

Test Mode:802. 11n HT40 Ant8

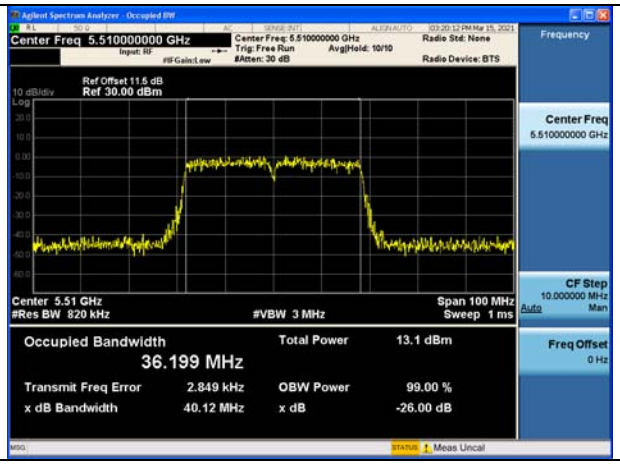

Test Mode:802. 11n HT40 Ant8

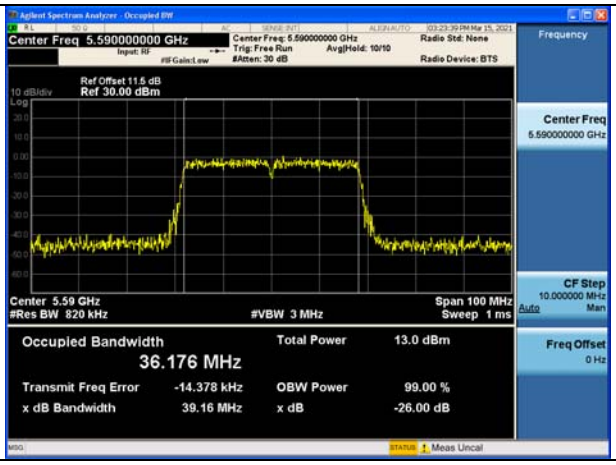

Test Mode:802. 11n HT40 Ant8

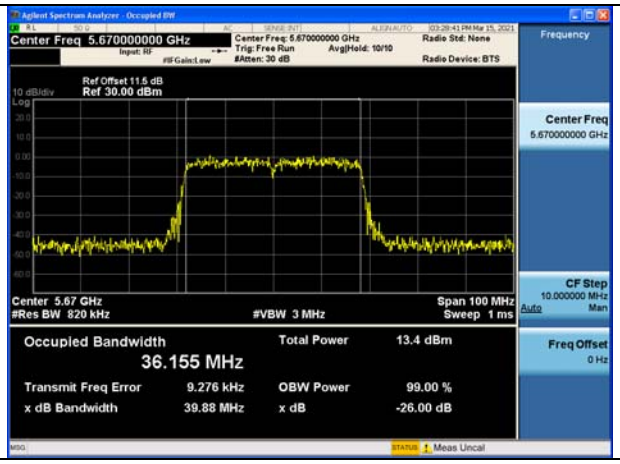

Test Mode:802. 11n HT40 Ant8

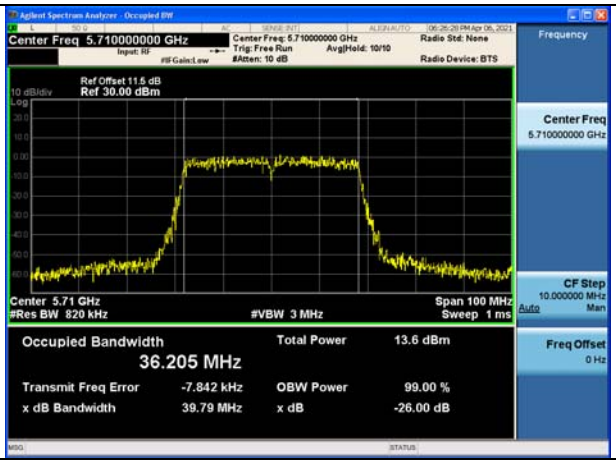

Test Mode:802. 11ac VHT80

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5530	Ant7	79.62
	Ant8	79.88
5610	Ant7	79.31
	Ant8	79.74
5690	Ant7	81.12
	Ant8	80.04

Test Mode:802. 11ac VHT80 Ant7

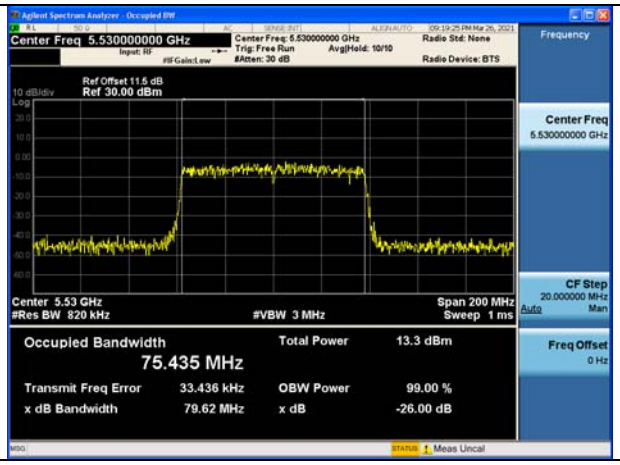

Test Mode:802. 11ac VHT80 Ant7

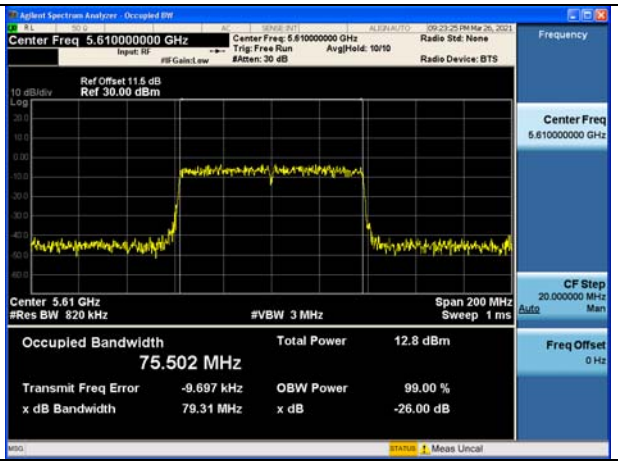

Test Mode:802. 11ac VHT80 Ant7

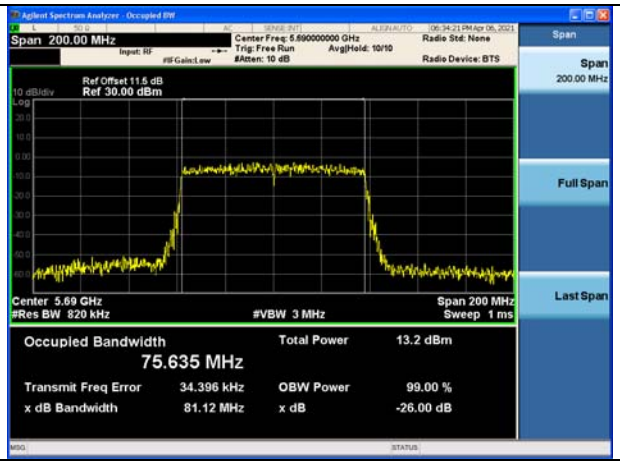

Test Mode:802. 11ac VHT80 Ant8

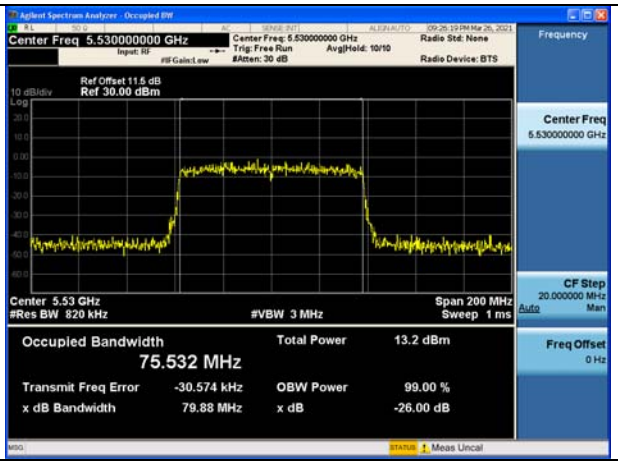

Test Mode:802. 11ac VHT80 Ant8

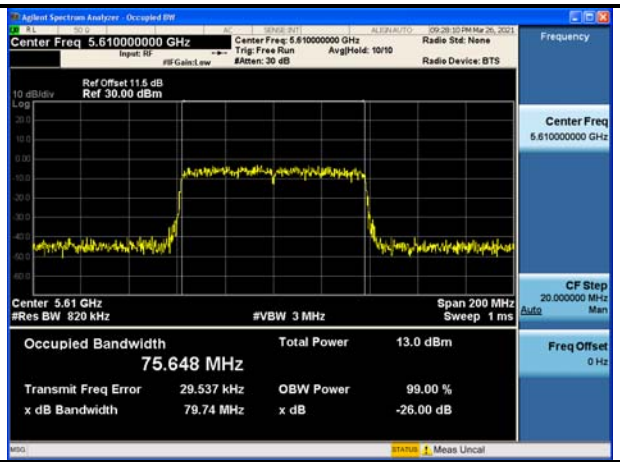
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.610000000 GHz
Center Freq: 5.610000000 GHz
Trig: Free Run
Avg|Hold: 10/10
#Atten: 30 dB
Radio Std: None
Radio Device: BTS
Frequency
Ref Offset 11.5 dB
10 dB/div
Ref 30.00 dBm
Center Freq
5.610000000 GHz
CF Step
20.000000 MHz
Auto
Man
Center 5.61 GHz
#Res BW 820 kHz
#VBW 3 MHz
Span 200 MHz
Sweep 1 ms
Occupied Bandwidth
75.648 MHz
Total Power 13.0 dBm
Transmit Freq Error 29.537 kHz
OBW Power 99.00 %
x dB Bandwidth 79.74 MHz
x dB -26.00 dB
Freq Offset
0 Hz
Meas Uncal

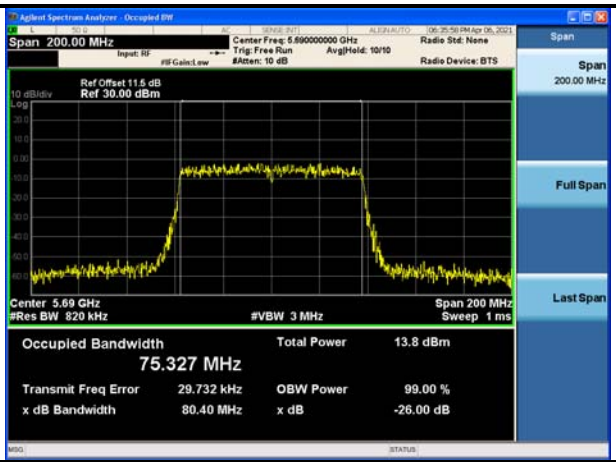
Agilent Spectrum Analyzer - Occupied BW
Span 200.00 MHz
Center Freq: 5.690000000 GHz
Trig: Free Run
Avg|Hold: 10/10
#Atten: 10 dB
Radio Std: None
Radio Device: BTS
Span
Span
200.00 MHz
Ref Offset 11.5 dB
10 dB/div
Ref 30.00 dBm
Full Span
Last Span
Center 5.69 GHz
#Res BW 820 kHz
#VBW 3 MHz
Span 200 MHz
Sweep 1 ms
Occupied Bandwidth
75.327 MHz
Total Power 13.8 dBm
Transmit Freq Error 29.732 kHz
OBW Power 99.00 %
x dB Bandwidth 80.40 MHz
x dB -26.00 dB

Test Mode:802. 11ac VHT160

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5570	Ant7	163.8
	Ant8	164.3

Test Mode:802. 11ac VHT160 Ant7	Test Mode:802. 11ac VHT160 Ant8

Test Mode:802.11ax HE20(242)

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5500	Ant7	21.29
	Ant8	20.79
5580	Ant7	21.36
	Ant8	21.63
5700	Ant7	21.29
	Ant8	21.33
5720	Ant7	21.04
	Ant8	20.72

Test Mode:802. 11ax HE20 Ant7

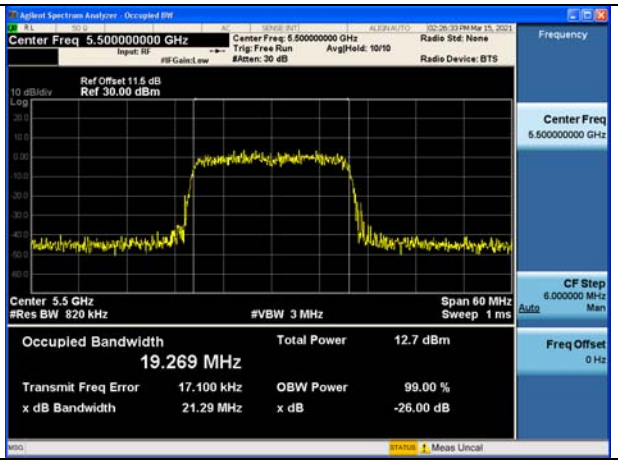

Test Mode:802. 11ax HE20 Ant7

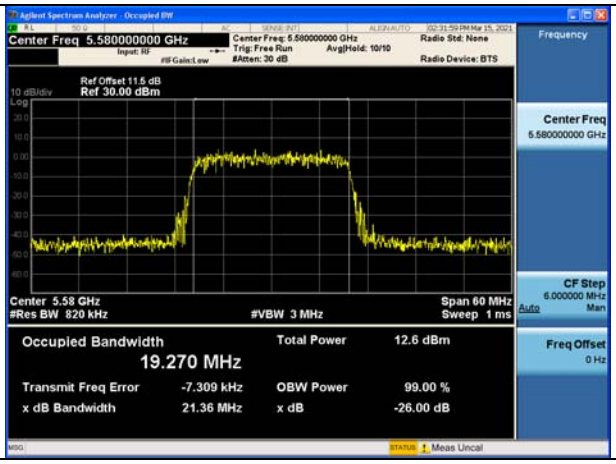

Test Mode:802. 11ax HE20 Ant7

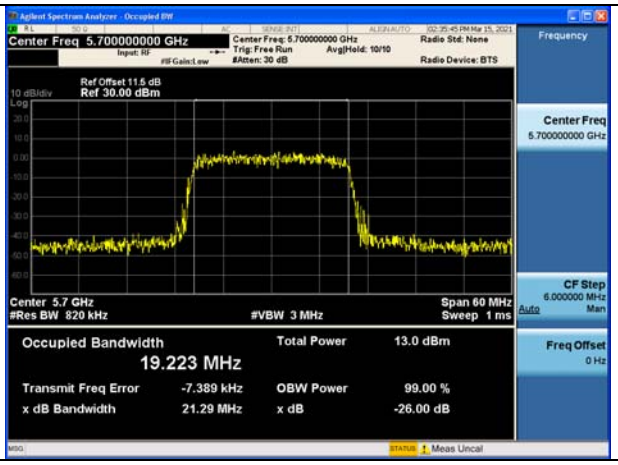

Test Mode:802. 11ax HE20 Ant7

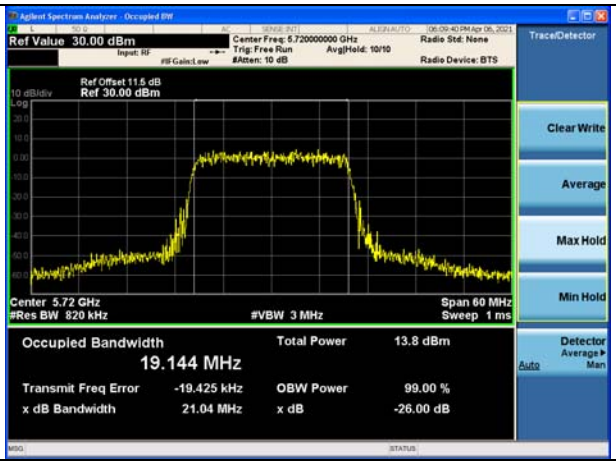

Test Mode:802. 11ax HE20 Ant8

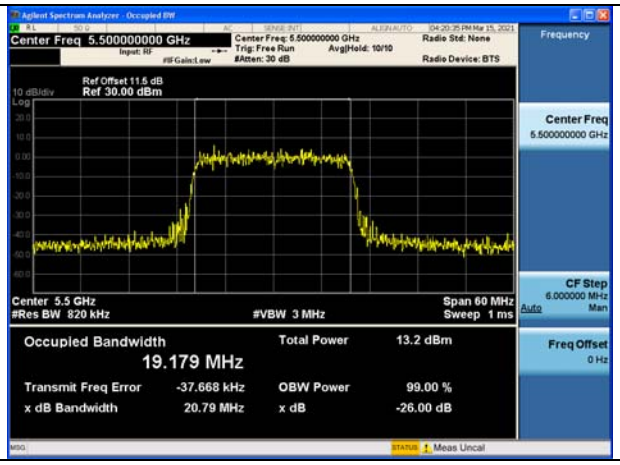

Test Mode:802. 11ax HE20 Ant8

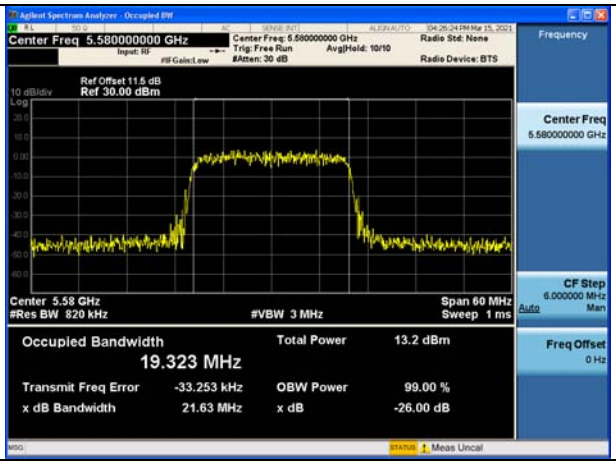

Test Mode:802. 11ax HE20 Ant8

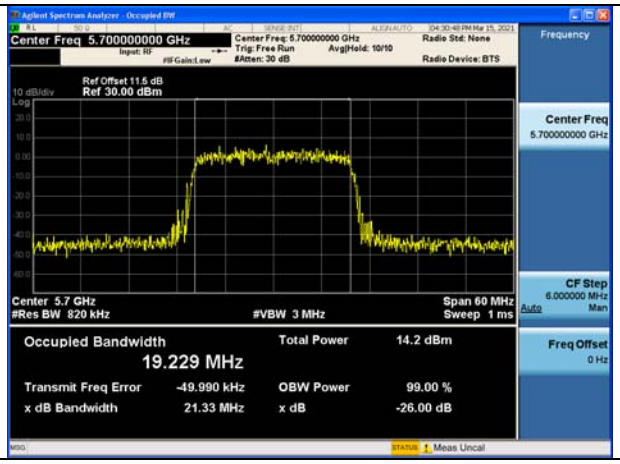

Test Mode:802. 11ax HE20 Ant8

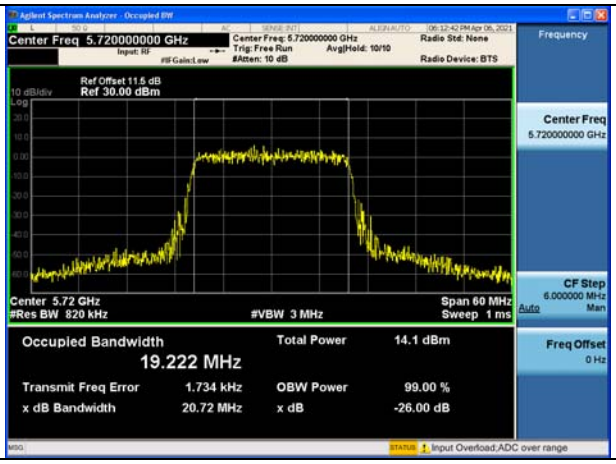

Test Mode:802.11ax HE40(484)

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5510	Ant7	40.91
	Ant8	40.51
5590	Ant7	40.31
	Ant8	40.11
5670	Ant7	40.40
	Ant8	39.87
5710	Ant7	39.72
	Ant8	39.84

Test Mode:802. 11ax HE40 Ant7

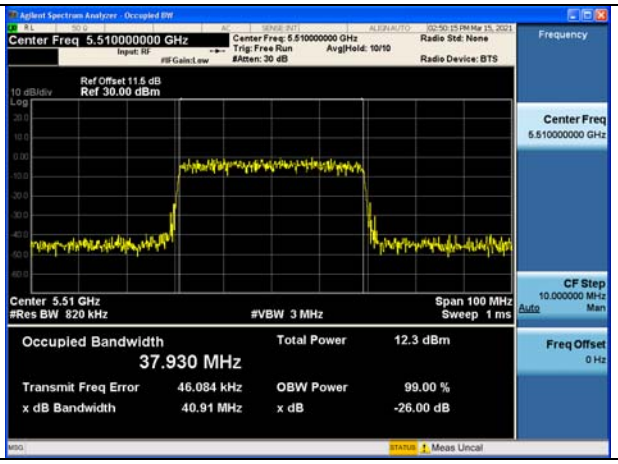

Test Mode:802. 11ax HE40 Ant7

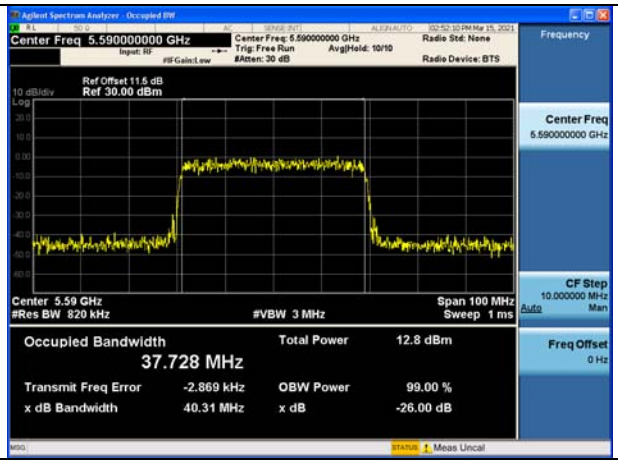

Test Mode:802. 11ax HE40 Ant7

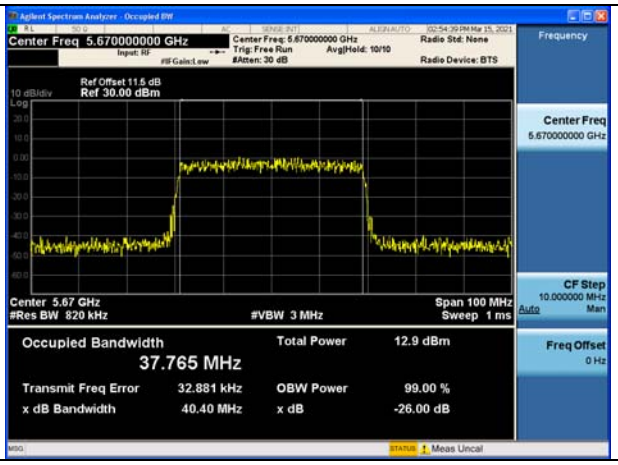

Test Mode:802. 11ax HE40 Ant7

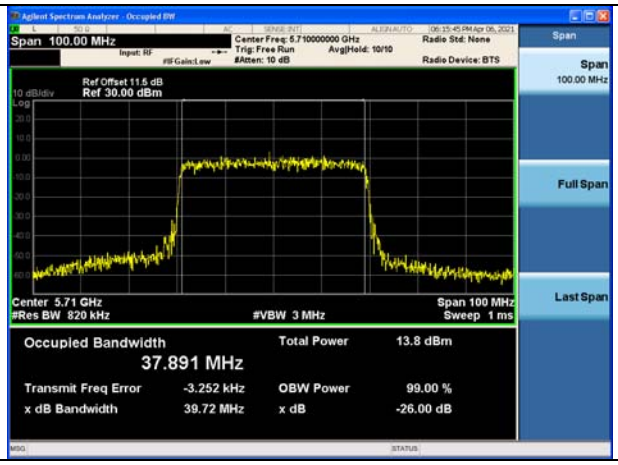

Test Mode:802. 11ax HE40 Ant8

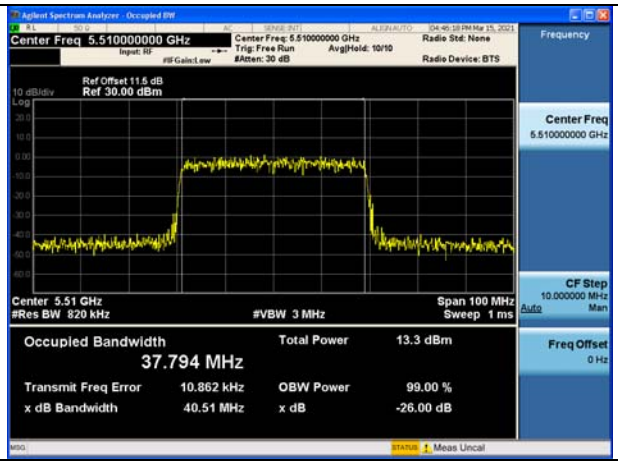

Test Mode:802. 11ax HE40 Ant8

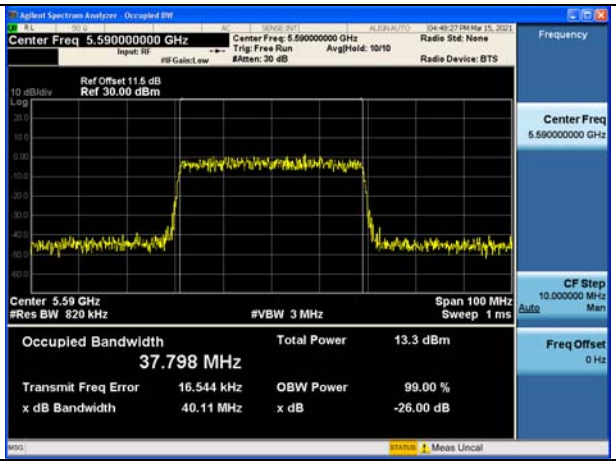

Test Mode:802. 11ax HE40 Ant8

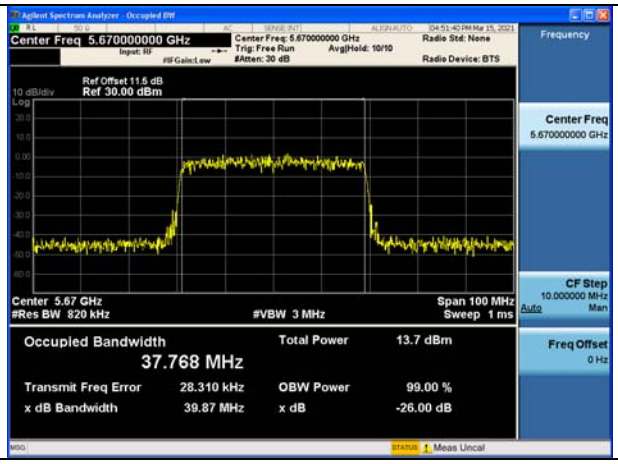

Test Mode:802. 11ax HE40 Ant8

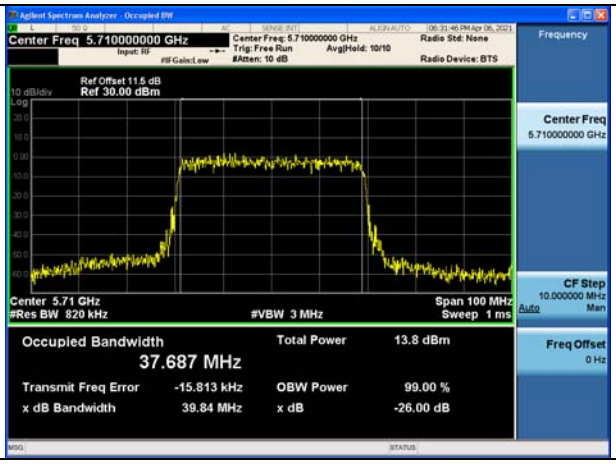

Test Mode:802.11ax HE80(996)

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5530	Ant7	80.47
	Ant8	80.22
5610	Ant7	80.89
	Ant8	80.14
5690	Ant7	80.20
	Ant8	79.96

Test Mode:802. 11ax HE80 Ant7

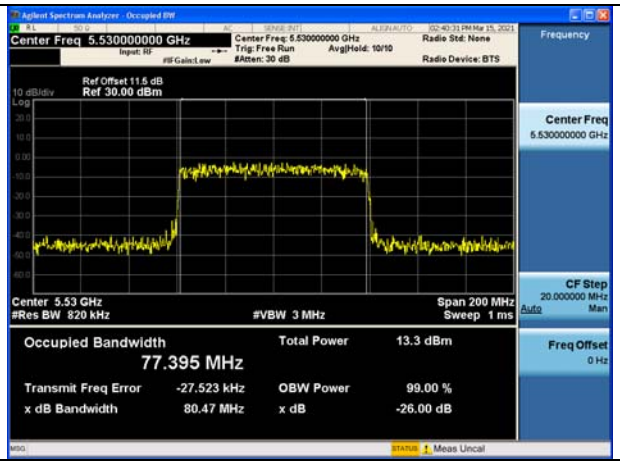

Test Mode:802. 11ax HE80 Ant7

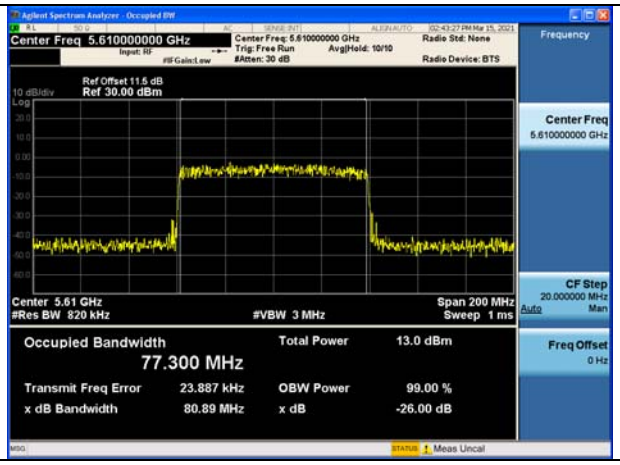

Test Mode:802. 11ax HE80 Ant7

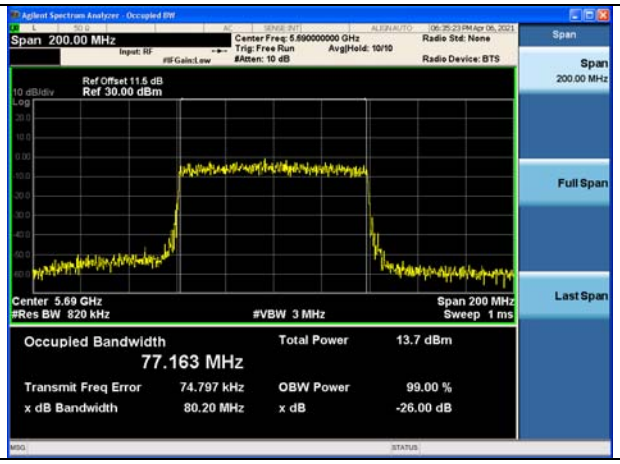

Test Mode:802. 11ax HE80 Ant8

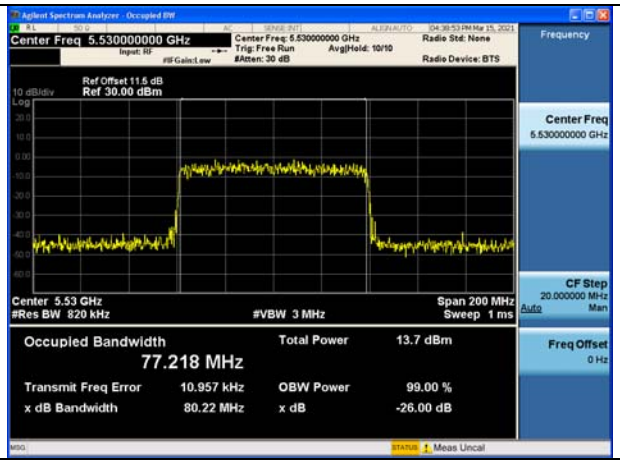

Test Mode:802. 11ax HE80 Ant8

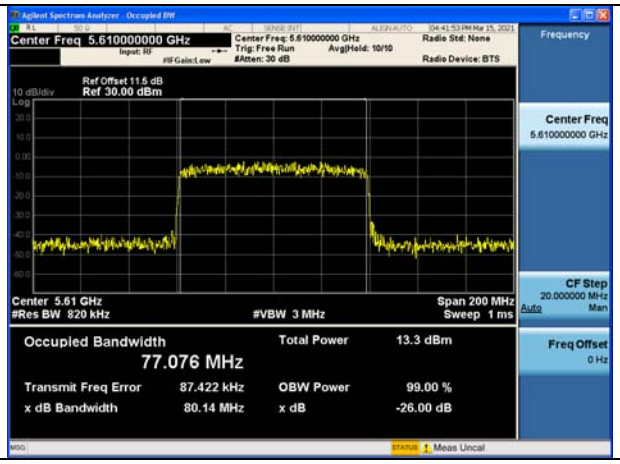

Test Mode:802. 11ax HE80 Ant8

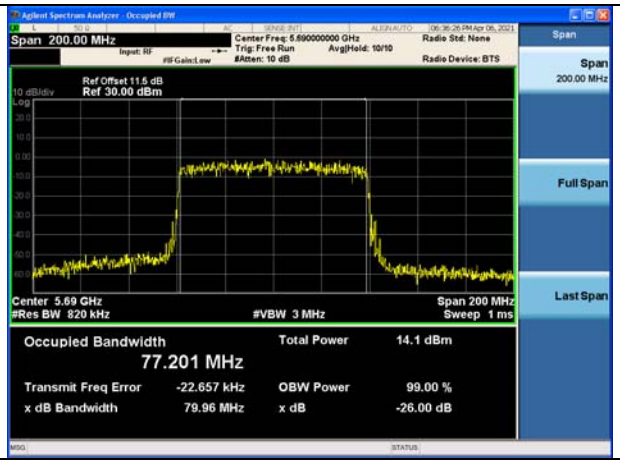

Test Mode:802.11ax HE160(1992)

Carrier frequency (MHz)	Ant	26dB Bandwidth (MHz)
5570	Ant7	163.8
	Ant8	164.6

Test Mode:802. 11ax HE160 Ant7	Test Mode:802. 11ax HE160 Ant8
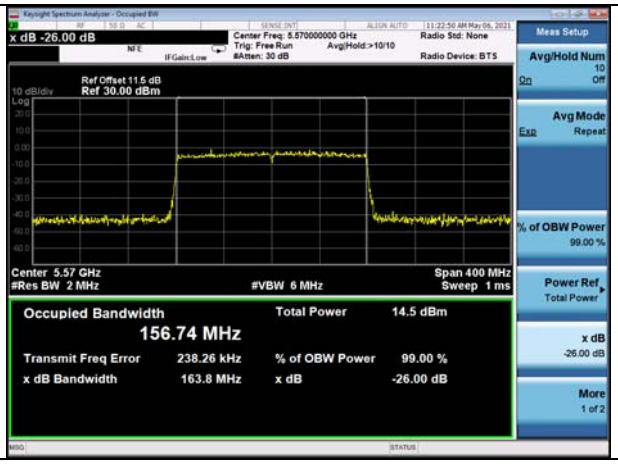	

Occupied Bandwidth

Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 1dB

Test Mode:802.11a

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5500	Ant7	16.730
	Ant8	16.783
5580	Ant7	16.828
	Ant8	16.707
5700	Ant7	16.735
	Ant8	16.702
5720	Ant7	16.753
	Ant8	16.736

Test Mode:802.11a Ant7

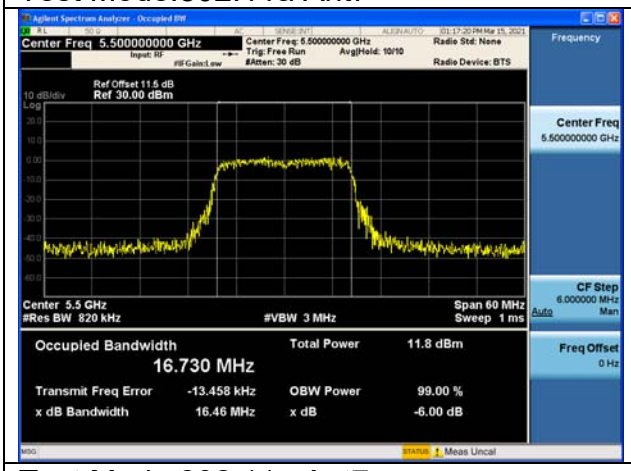

Test Mode:802.11a Ant7

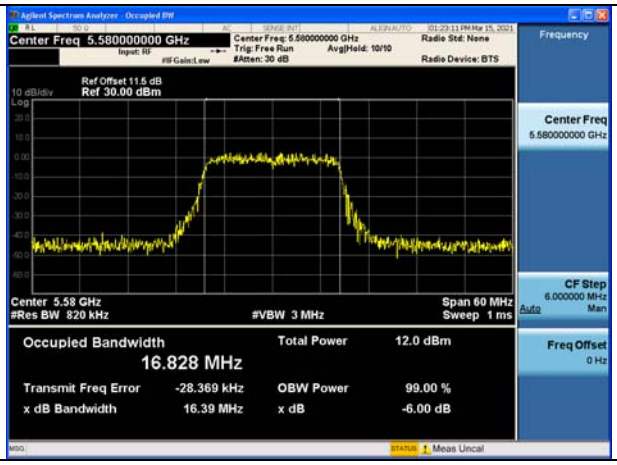

Test Mode:802.11a Ant7

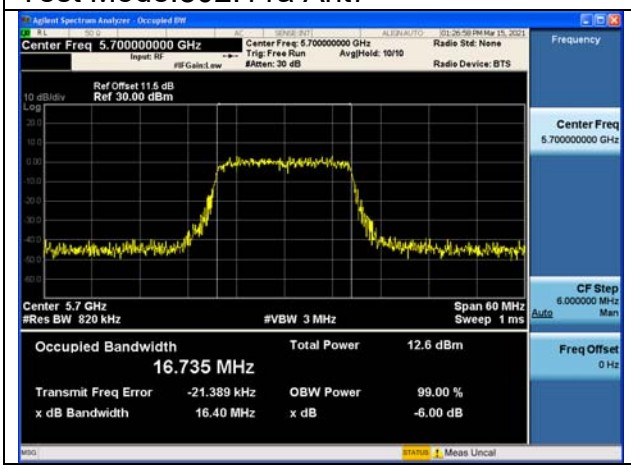

Test Mode:802.11a Ant7

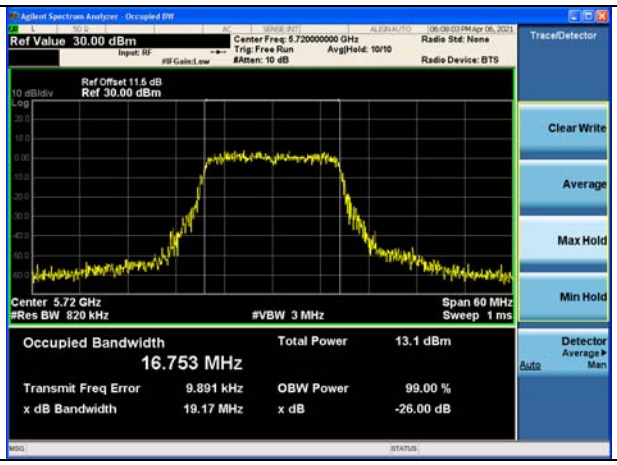

Test Mode:802.11a Ant8

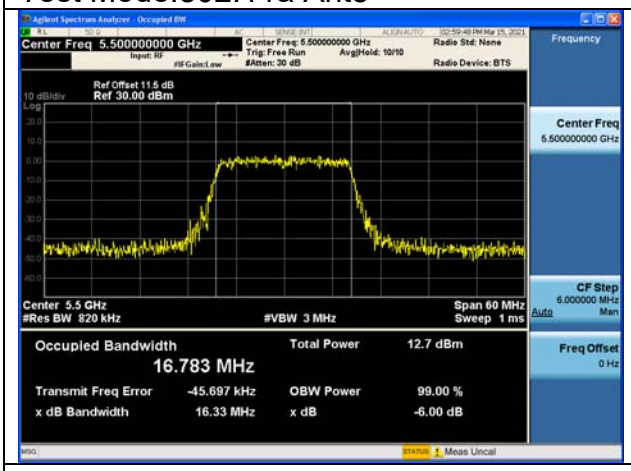

Test Mode:802.11a Ant8

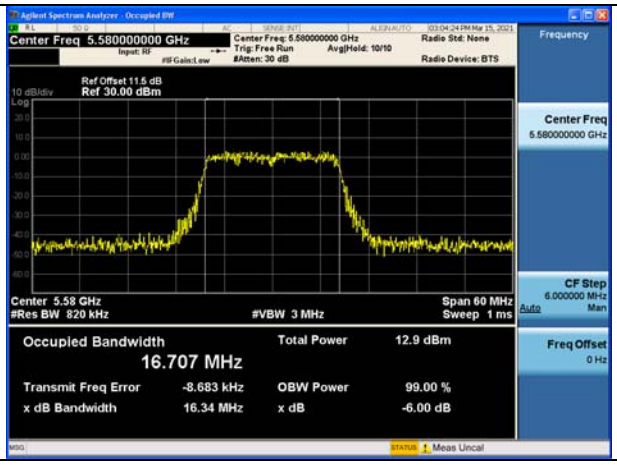

Test Mode:802.11a Ant8

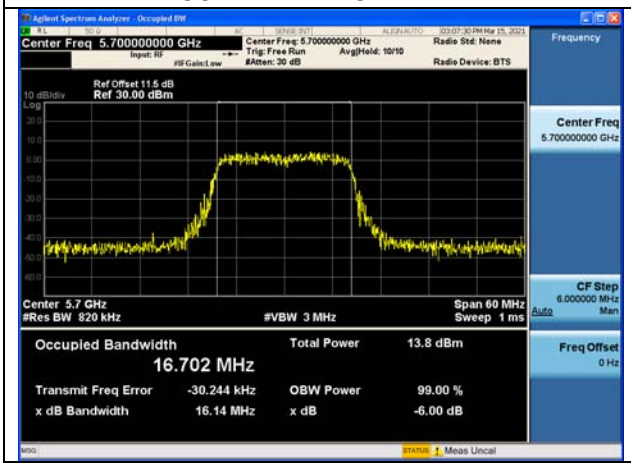

Test Mode:802.11a Ant8

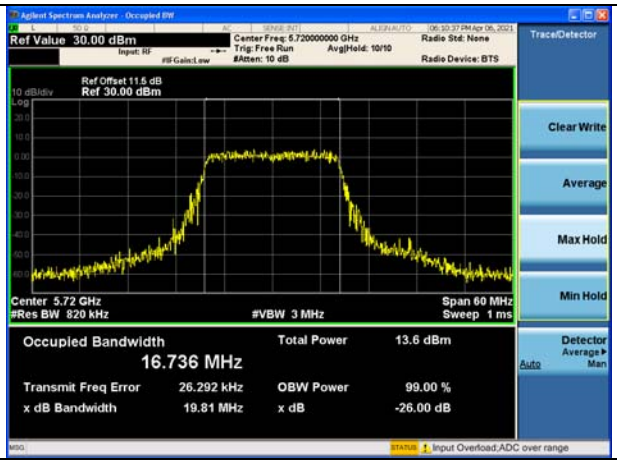

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5500	Ant7	17.978
	Ant8	17.986
5580	Ant7	17.894
	Ant8	17.935
5700	Ant7	17.906
	Ant8	17.866
5720	Ant7	17.938
	Ant8	18.001

Test Mode:802. 11n HT20 Ant7

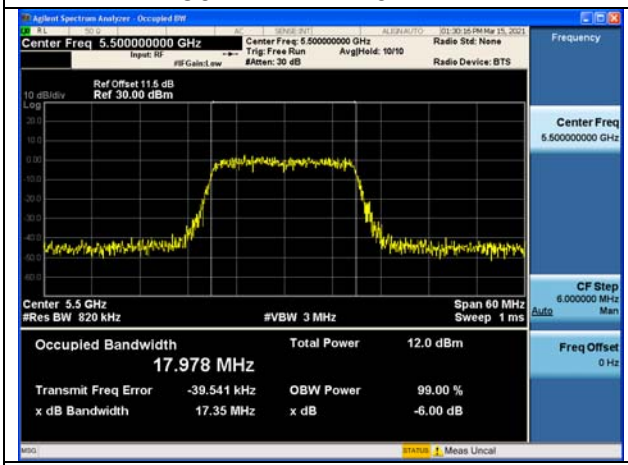

Test Mode:802. 11n HT20 Ant7

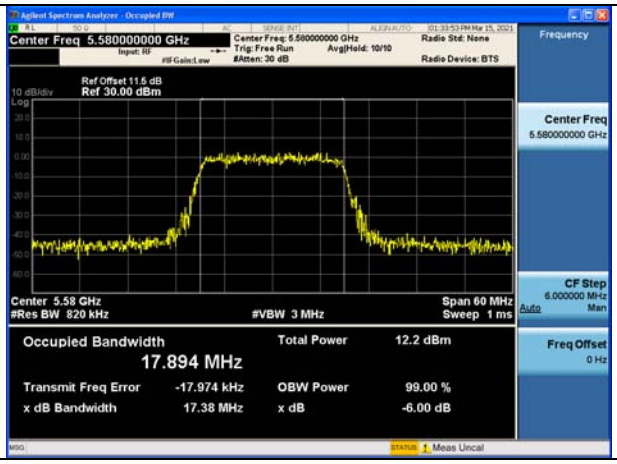

Test Mode:802. 11n HT20 Ant7

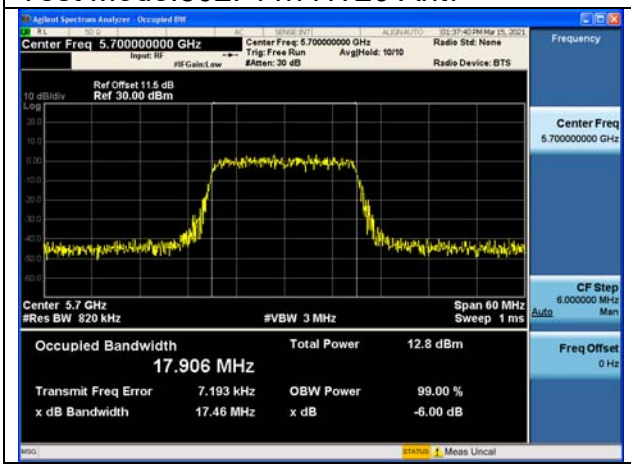

Test Mode:802. 11n HT20 Ant7

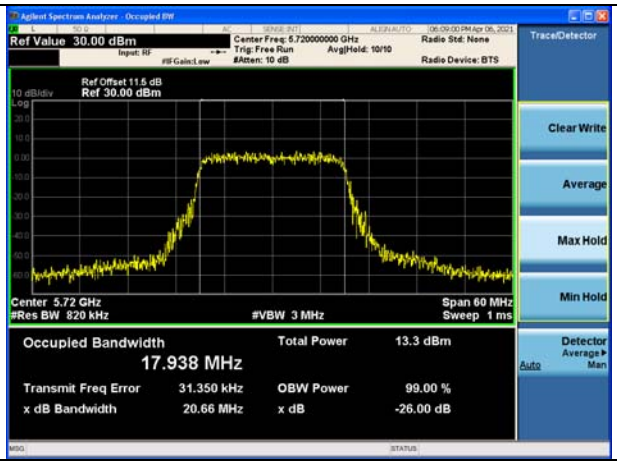

Test Mode:802. 11n HT20 Ant8

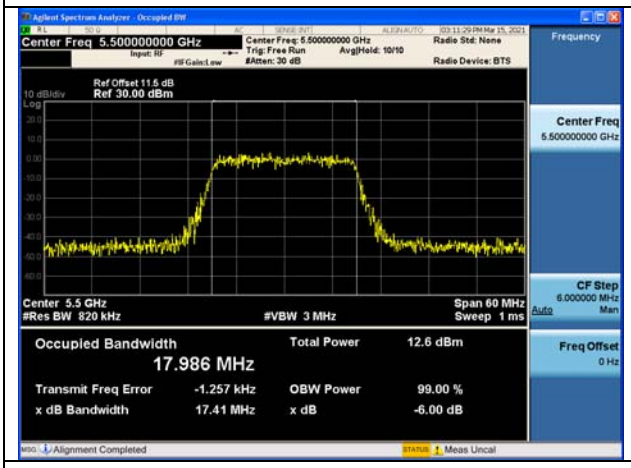

Test Mode:802. 11n HT20 Ant8

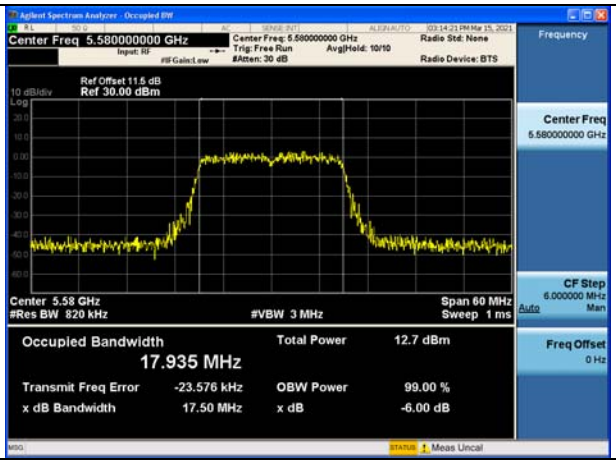

Test Mode:802. 11n HT20 Ant8

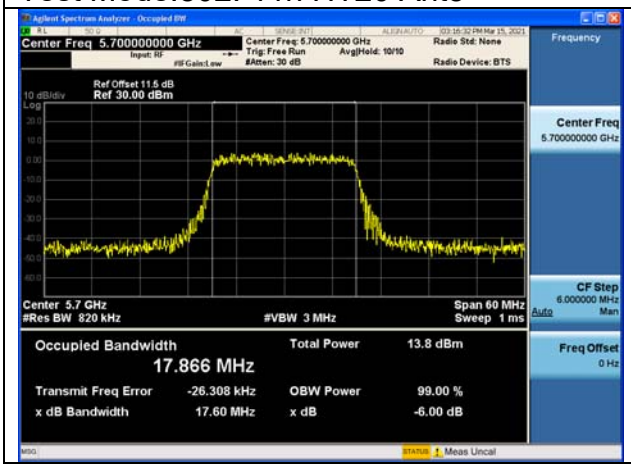

Test Mode:802. 11n HT20 Ant8

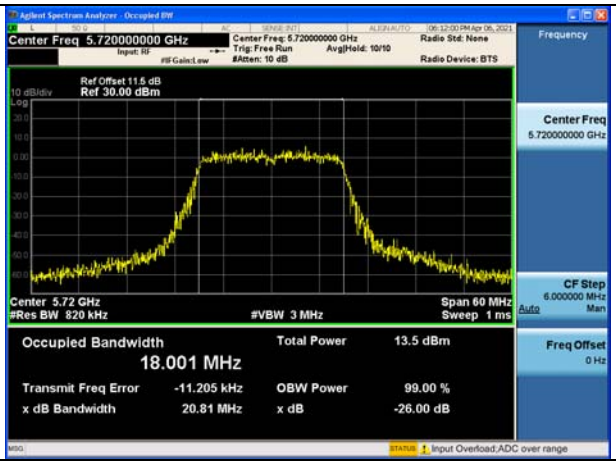

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5510	Ant7	36.170
	Ant8	36.109
5590	Ant7	36.216
	Ant8	36.169
5670	Ant7	36.213
	Ant8	36.264
5710	Ant7	36.174
	Ant8	36.265

Test Mode:802. 11n HT40 Ant7

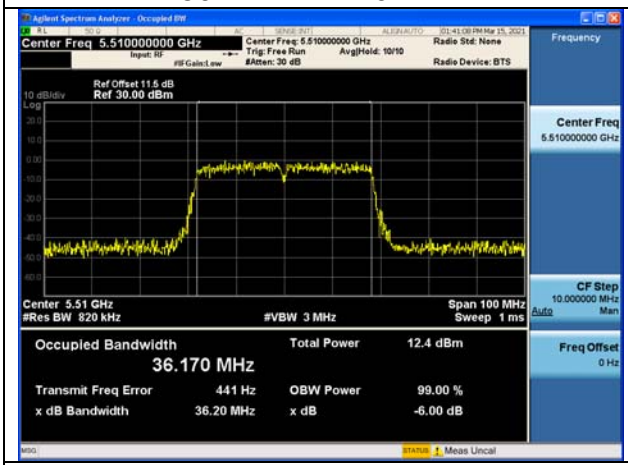

Test Mode:802. 11n HT40 Ant7

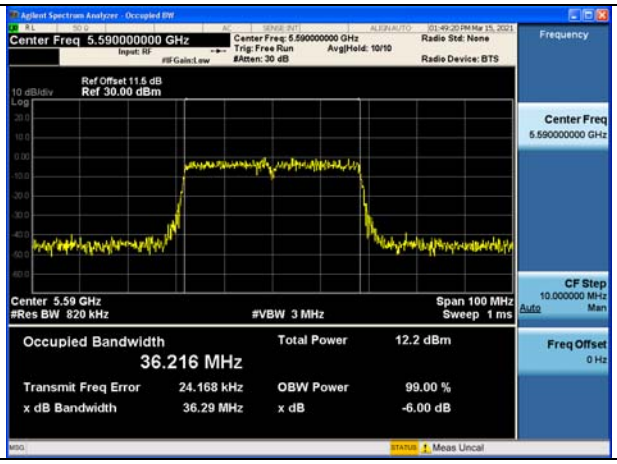

Test Mode:802. 11n HT40 Ant7

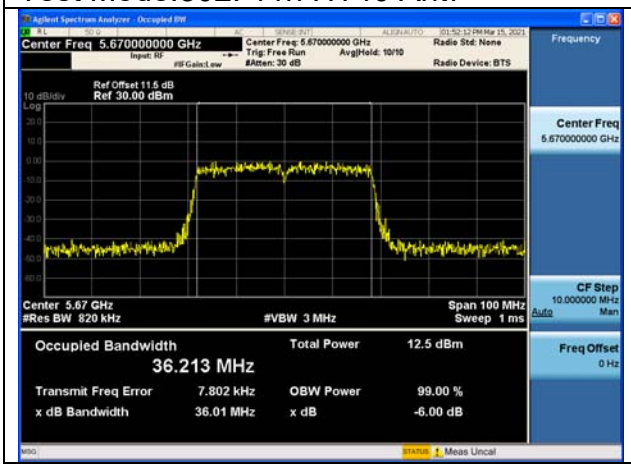

Test Mode:802. 11n HT40 Ant7

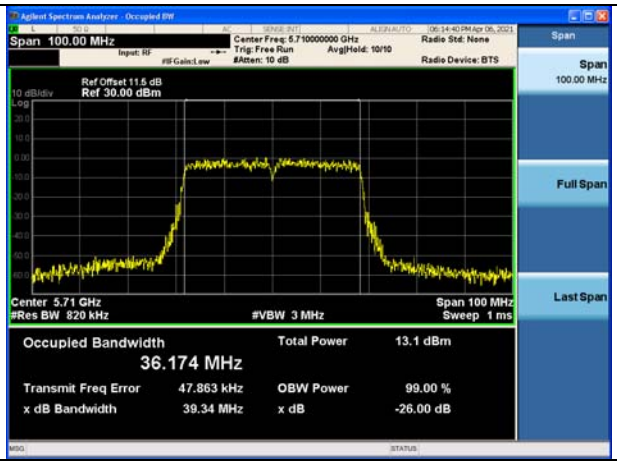

Test Mode:802. 11n HT40 Ant8

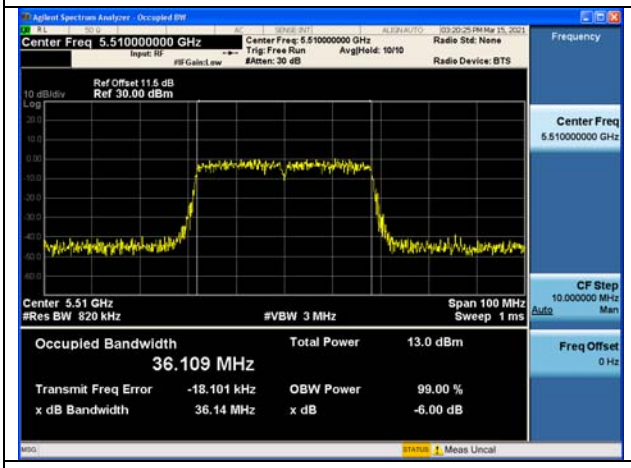

Test Mode:802. 11n HT40 Ant8

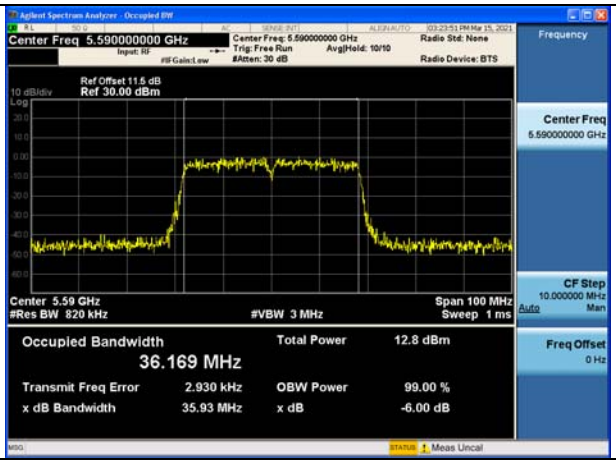

Test Mode:802. 11n HT40 Ant8

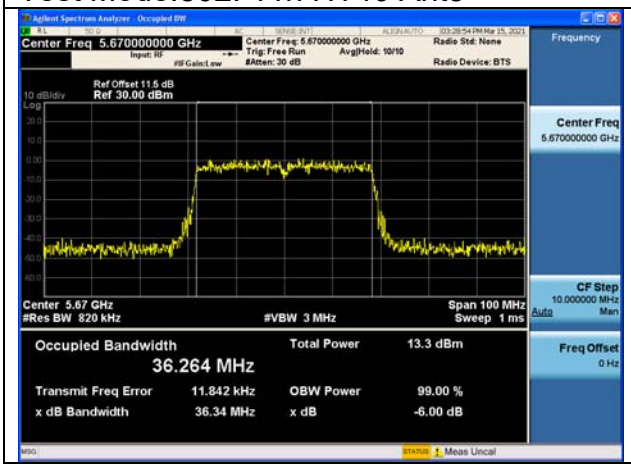

Test Mode:802. 11n HT40 Ant8

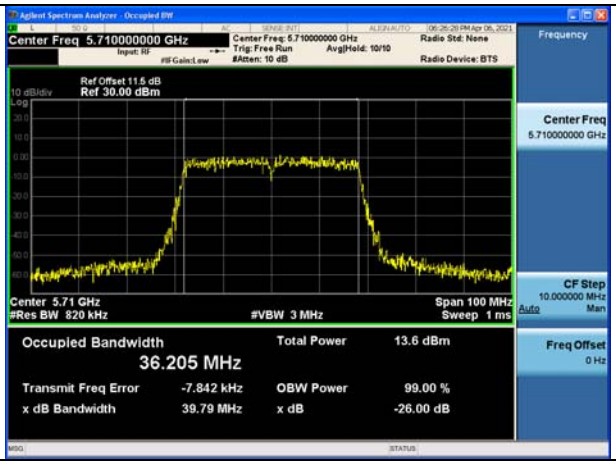

Test Mode:802. 11ac VHT80

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5530	Ant7	75.656
	Ant8	75.590
5610	Ant7	75.539
	Ant8	75.509
5690	Ant7	75.635
	Ant8	75.327

Test Mode:802. 11ac VHT80 Ant7

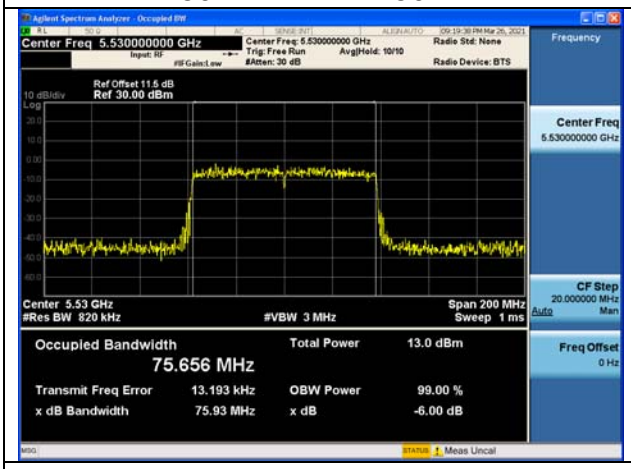

Test Mode:802. 11ac VHT80 Ant7

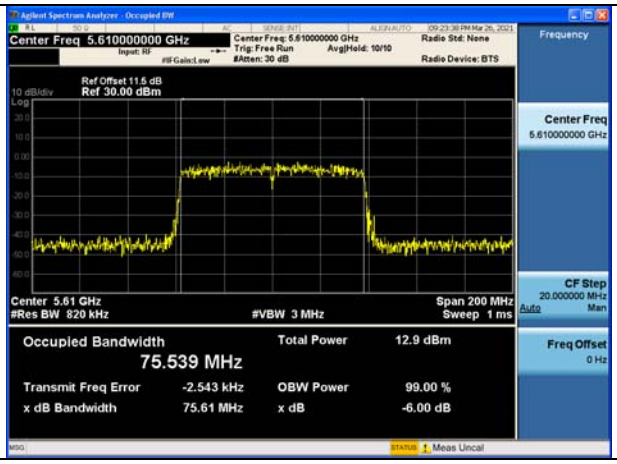

Test Mode:802. 11ac VHT80 Ant7

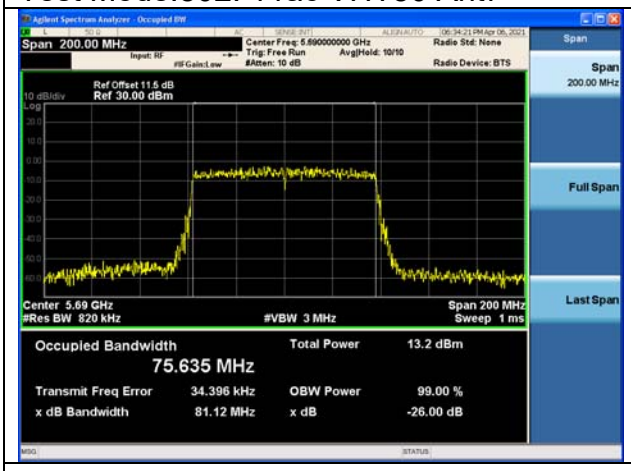

Test Mode:802. 11ac VHT80 Ant8

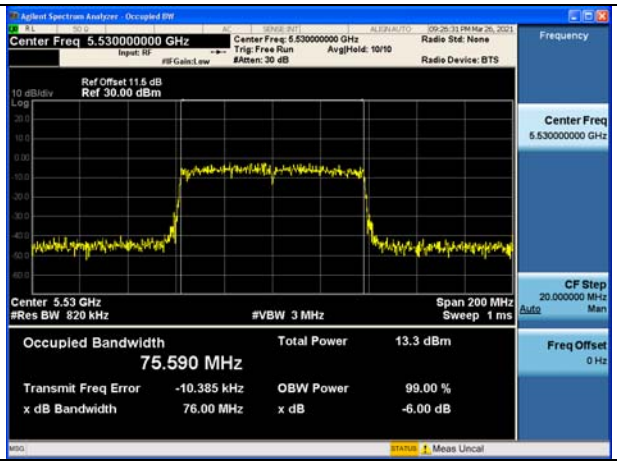

Test Mode:802. 11ac VHT80 Ant8

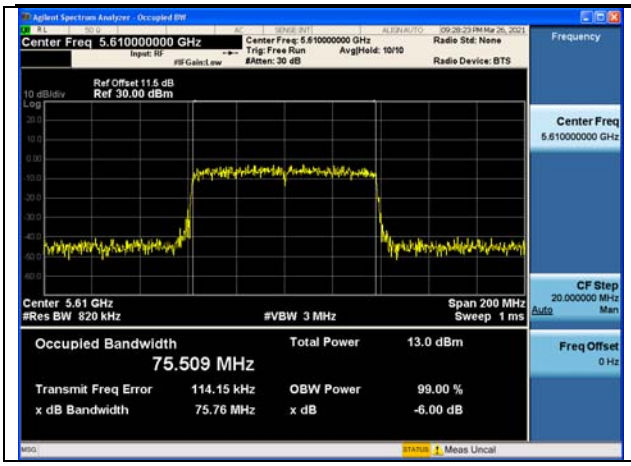
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.610000000 GHz
Center Freq: 5.610000000 GHz
Trig: Free Run
Avg|Hold: 10/10
#Atten: 30 dB
Radio Std: None
Radio Device: BTS
Frequency
Ref Offset 11.5 dB
10 dB/div
Ref 30.00 dBm
Center Freq
5.610000000 GHz
CF Step
20.000000 MHz
Auto
Man
Center 5.61 GHz
#Res BW 820 kHz
#VBW 3 MHz
Span 200 MHz
Sweep 1 ms
Freq Offset
0 Hz
Occupied Bandwidth
75.509 MHz
Total Power 13.0 dBm
Transmit Freq Error 114.15 kHz
OBW Power 99.00 %
x dB Bandwidth 75.76 MHz
x dB -6.00 dB
Meas Uncal

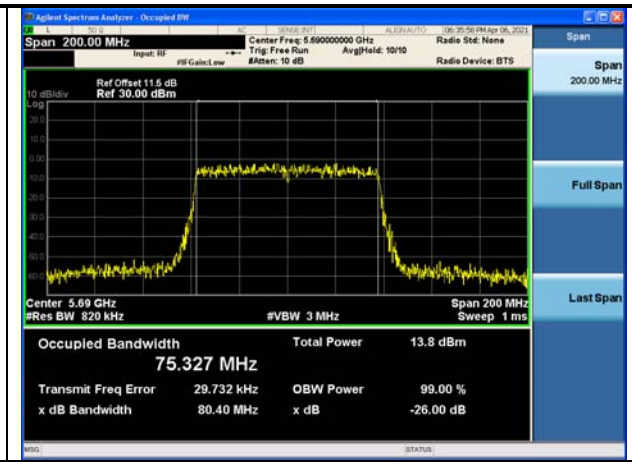
Agilent Spectrum Analyzer - Occupied BW
Span 200.00 MHz
Center Freq: 5.690000000 GHz
Trig: Free Run
Avg|Hold: 10/10
#Atten: 10 dB
Radio Std: None
Radio Device: BTS
Span
Span
200.00 MHz
Ref Offset 11.5 dB
10 dB/div
Ref 30.00 dBm
Full Span
Last Span
Center 5.69 GHz
#Res BW 820 kHz
#VBW 3 MHz
Span 200 MHz
Sweep 1 ms
Occupied Bandwidth
75.327 MHz
Total Power 13.8 dBm
Transmit Freq Error 29.732 kHz
OBW Power 99.00 %
x dB Bandwidth 80.40 MHz
x dB -26.00 dB

Test Mode:802. 11ac VHT160

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5570	Ant7	154.98
	Ant8	154.90

Test Mode:802. 11ac VHT160 Ant7

Test Mode:802. 11ac VHT160 Ant8

Test Mode:802.11ax HE20(242)

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5500	Ant7	19.194
	Ant8	19.194
5580	Ant7	19.211
	Ant8	19.219
5700	Ant7	19.203
	Ant8	19.189
5720	Ant7	19.144
	Ant8	19.222

Test Mode:802. 11ax HE20 Ant7

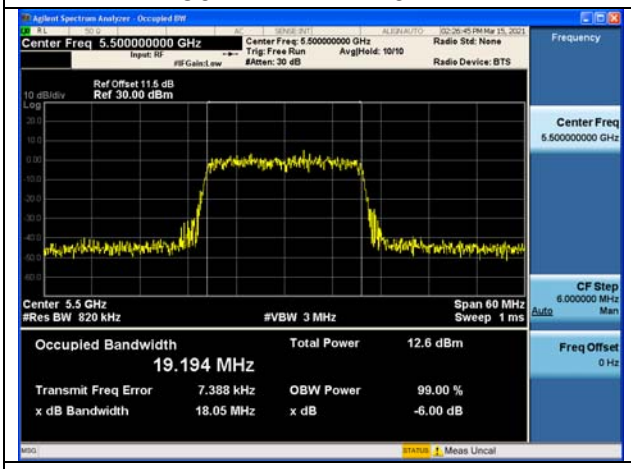

Test Mode:802. 11ax HE20 Ant7

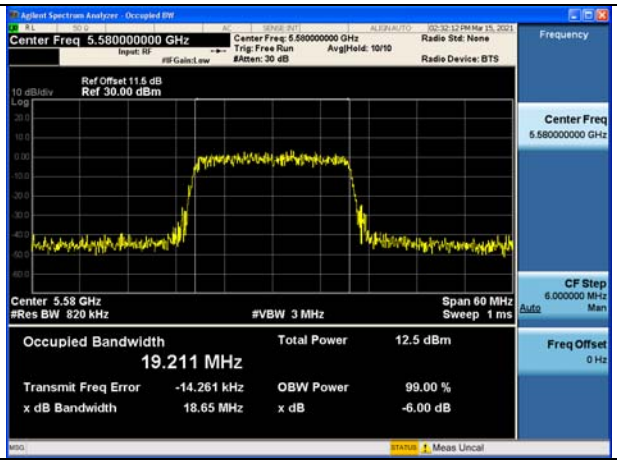

Test Mode:802. 11ax HE20 Ant7

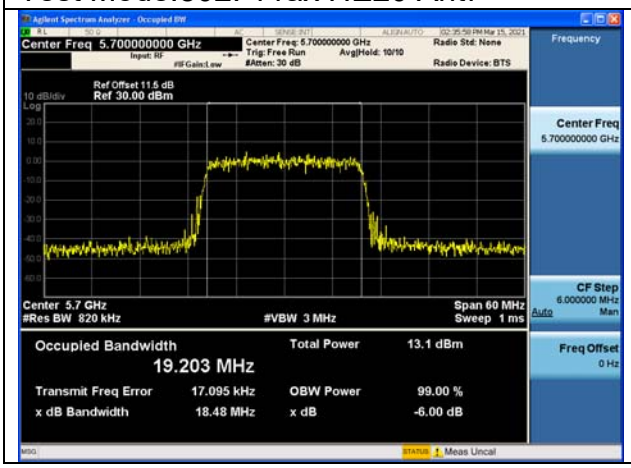

Test Mode:802. 11ax HE20 Ant7

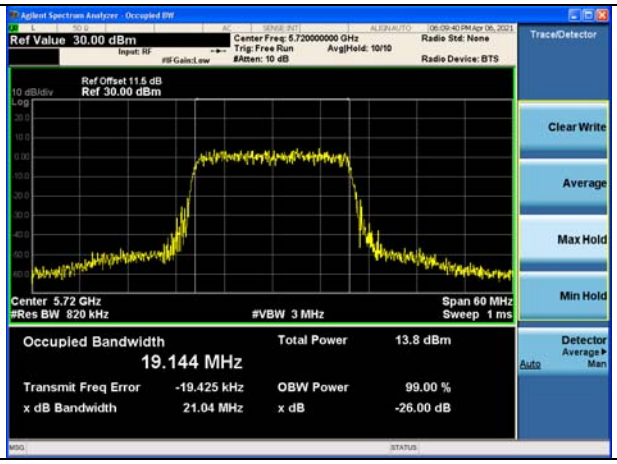

Test Mode:802. 11ax HE20 Ant8

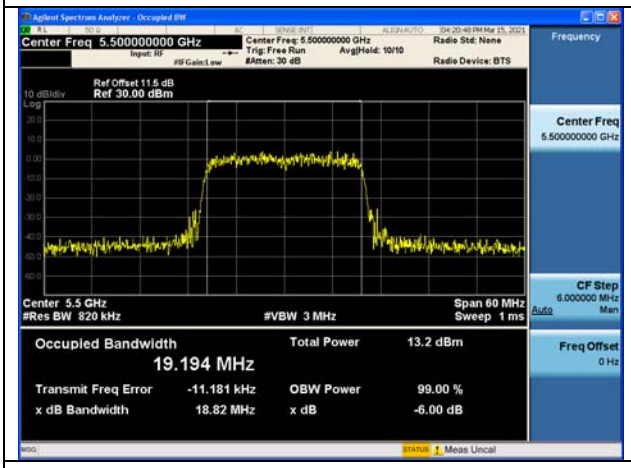

Test Mode:802. 11ax HE20 Ant8

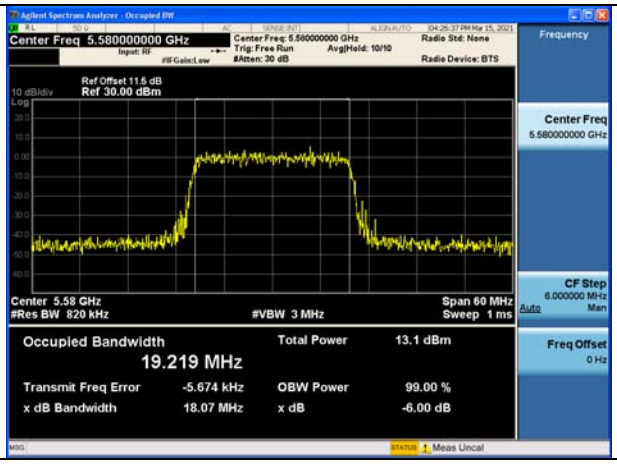

Test Mode:802. 11ax HE20 Ant8

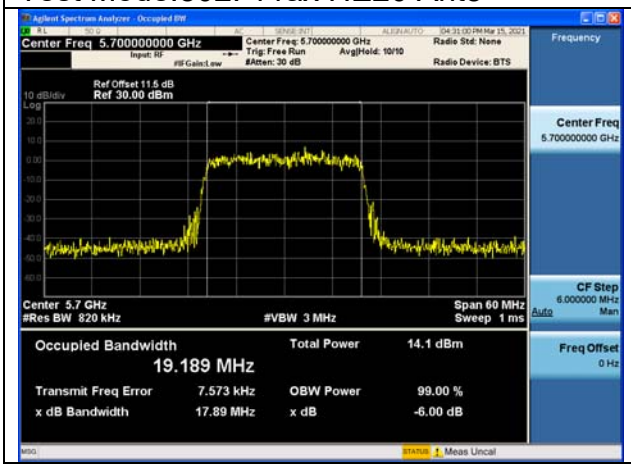

Test Mode:802. 11ax HE20 Ant8

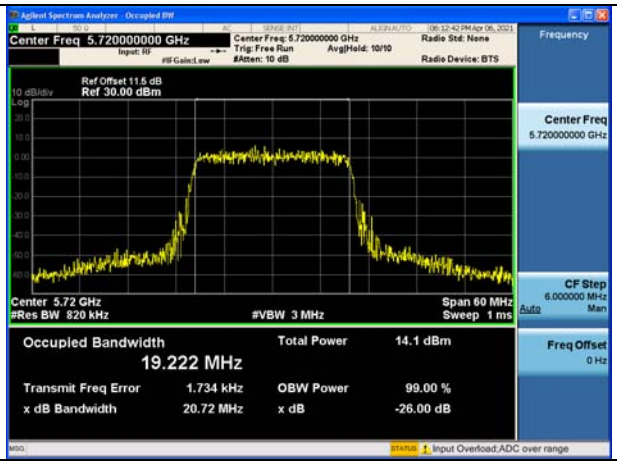

Test Mode:802.11ax HE40(484)

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5510	Ant7	37.722
	Ant8	37.798
5590	Ant7	37.849
	Ant8	37.811
5670	Ant7	37.756
	Ant8	37.889
5710	Ant7	37.891
	Ant8	37.687

Test Mode:802. 11ax HE40 Ant7

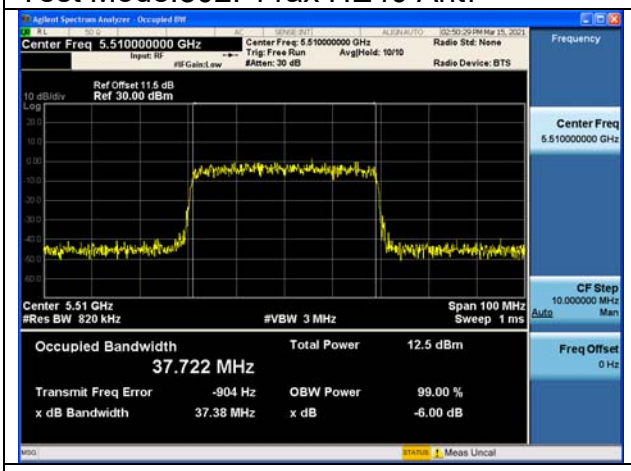

Test Mode:802. 11ax HE40 Ant7

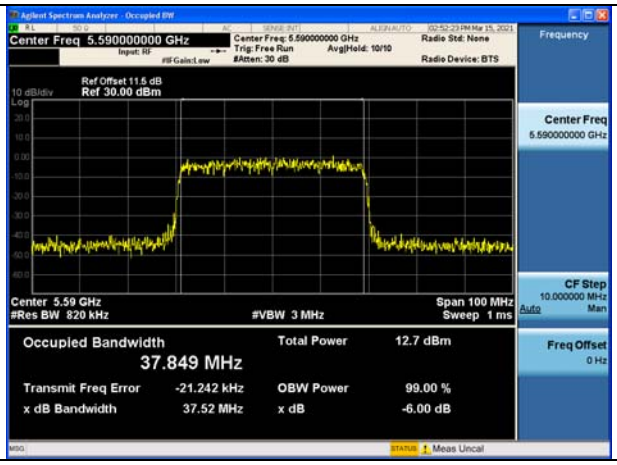

Test Mode:802. 11ax HE40 Ant7

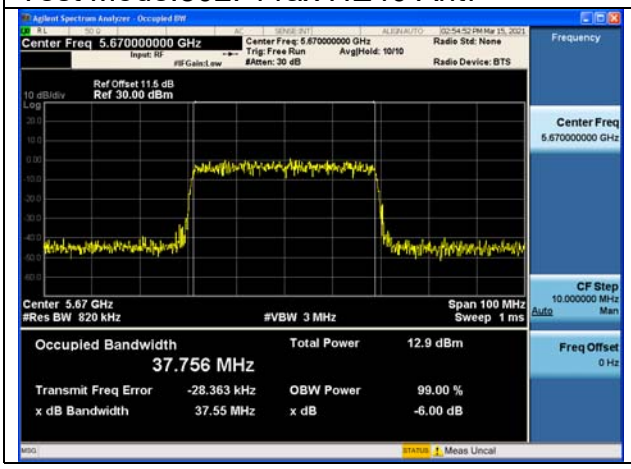

Test Mode:802. 11ax HE40 Ant7

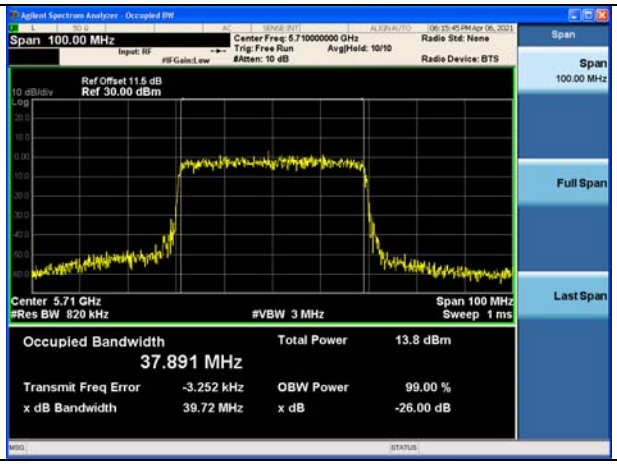

Test Mode:802. 11ax HE40 Ant8

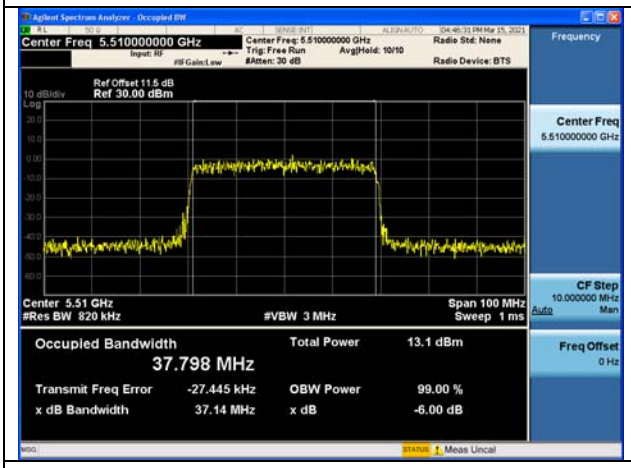

Test Mode:802. 11ax HE40 Ant8

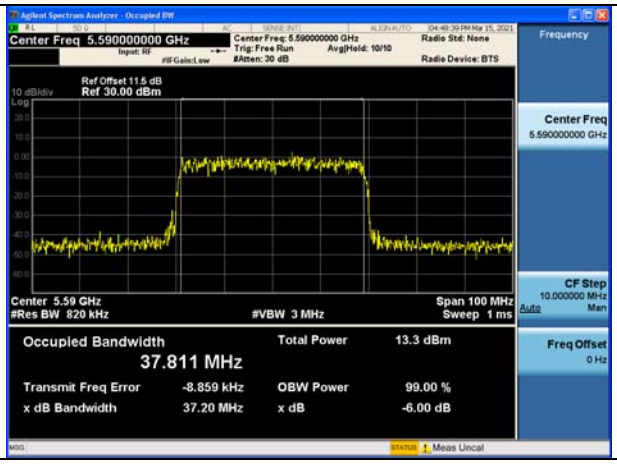

Test Mode:802. 11ax HE40 Ant8

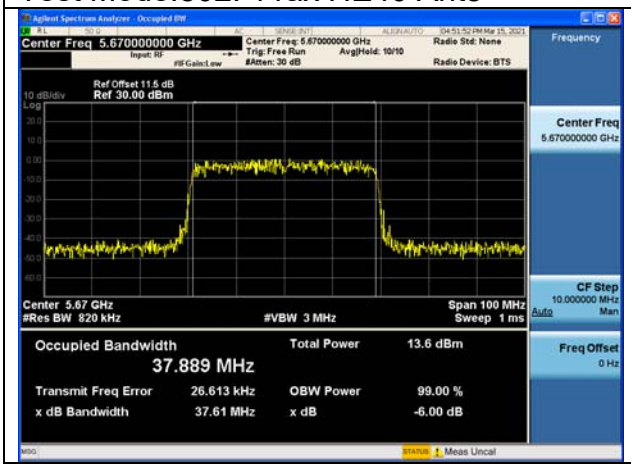

Test Mode:802. 11ax HE40 Ant8

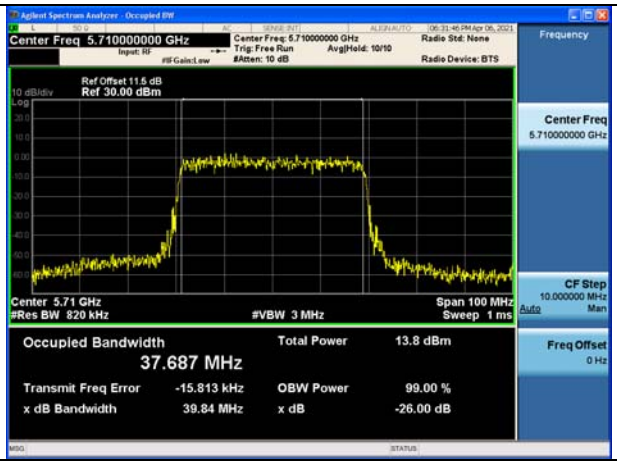

Test Mode:802.11ax HE80(996)

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5530	Ant7	77.231
	Ant8	77.312
5610	Ant7	77.125
	Ant8	77.128
5690	Ant7	77.163
	Ant8	77.201

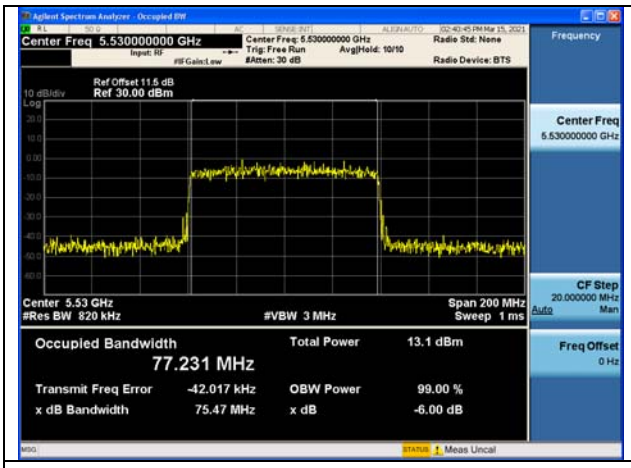

Test Mode:802. 11ax HE80 Ant7

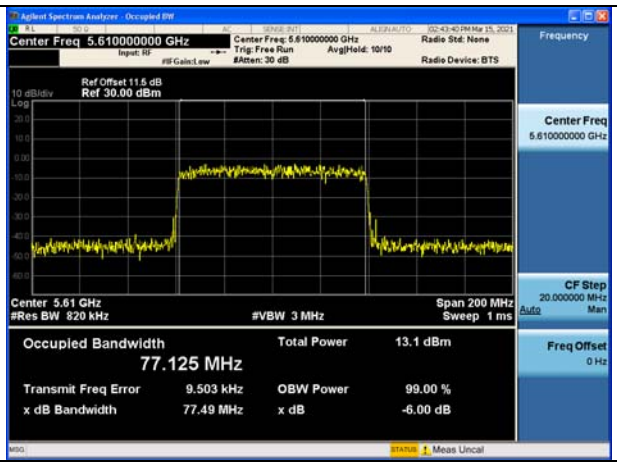

Test Mode:802. 11ax HE80 Ant8

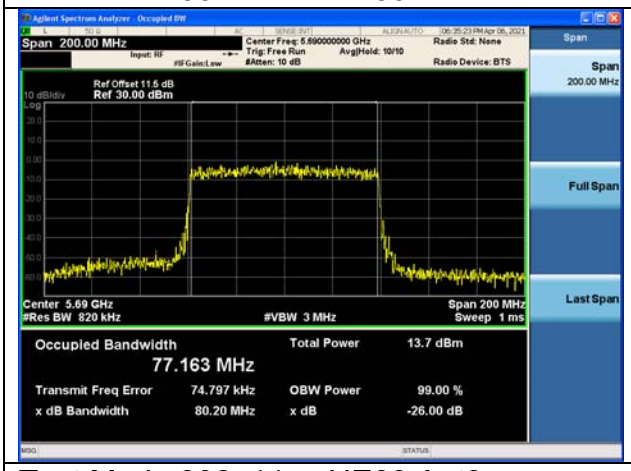

Test Mode:802. 11ax HE80 Ant8

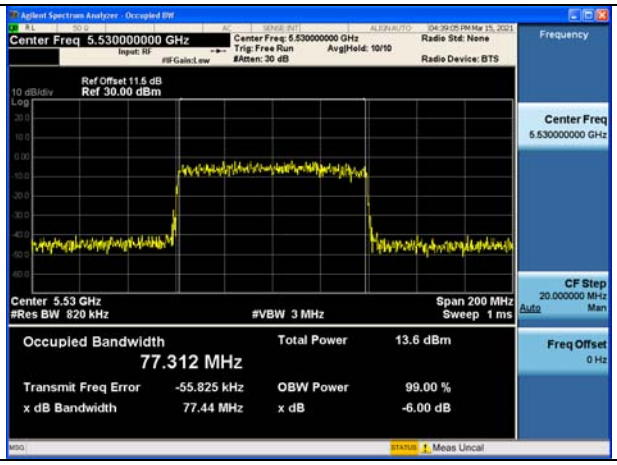

Test Mode:802. 11ax HE80 Ant8

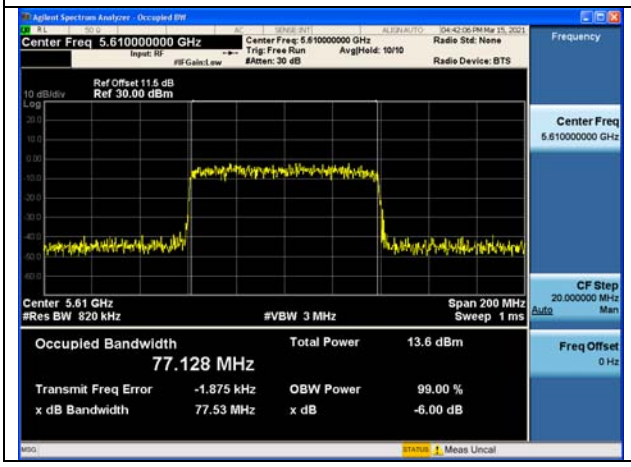

Test Mode:802. 11ax HE80 Ant8

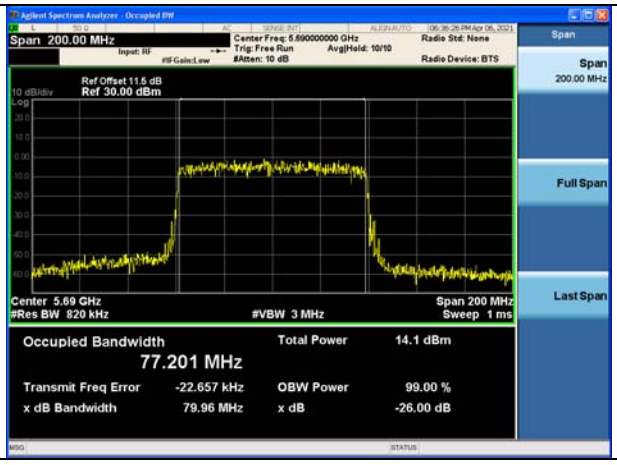

Test Mode:802. 11ac VHT160

Carrier frequency (MHz)	Ant	Occupied Bandwidth (MHz)
5570	Ant7	154.98
	Ant8	154.90

Test Mode:802. 11ac VHT160 Ant7	Test Mode:802. 11ac VHT160 Ant8

Transmitter Power Spectral Density

Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 1dB

Test Mode:802.11a

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Limit (dBm)	Power Density (dBm)
5500	0.05	Ant7	11dBm/MHz	-2.700
		Ant8		-1.674
		Ant7+Ant8		0.854
5580		Ant7		-2.802
		Ant8		-1.823
		Ant7+Ant8		0.725
5700		Ant7		-2.076
		Ant8		-0.925
		Ant7+Ant8		1.548
5720		Ant7		-2.302
		Ant8		-1.806
		Ant7+Ant8		0.963
5720		Ant7	30dBm/500kHz	-5.171
		Ant8		-4.779
		Ant7+Ant8		-1.960

Test Mode:802.11a Ant7

Test Mode:802.11a Ant7

Test Mode:802.11a Ant7

Test Mode:802.11a Ant7

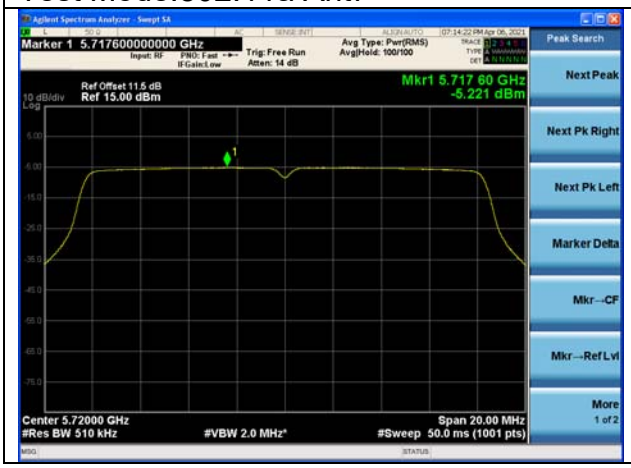

Test Mode:802.11a Ant8

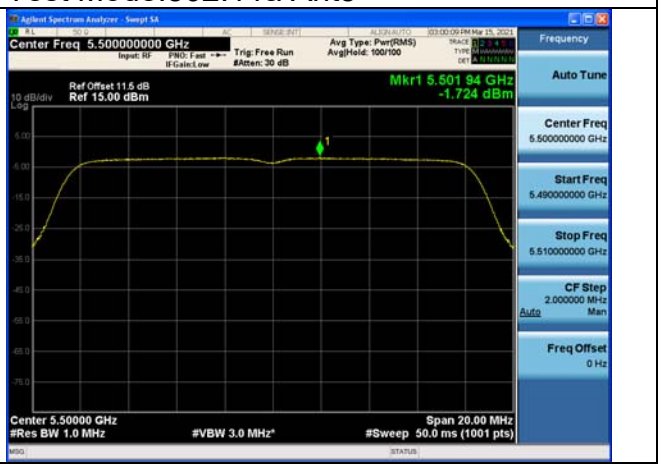

Test Mode:802.11a Ant8

Test Mode:802.11a Ant8

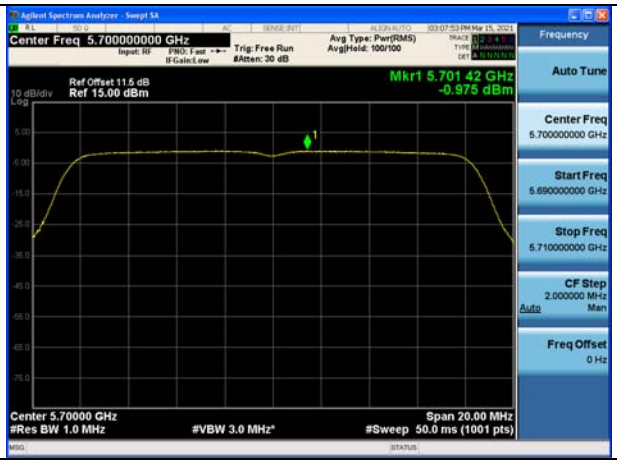

Test Mode:802.11a Ant8

Test Mode:802.11a Ant8

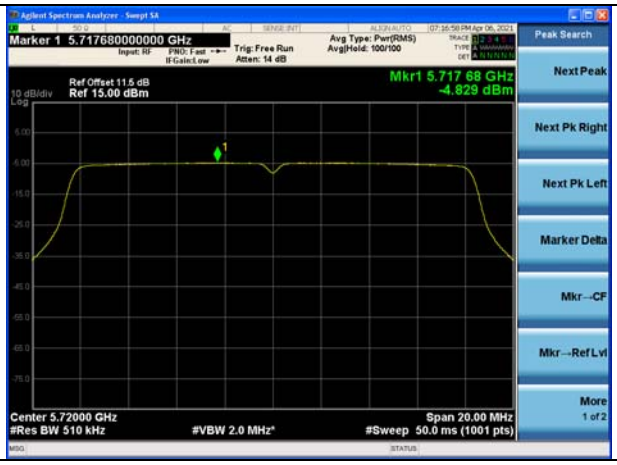

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Limit (dBm)	Power Density (dBm)
5500	0.02	Ant7	11dBm/MHz	-2.893
		Ant8		-1.957
		Ant7+Ant8		0.610
5580		Ant7		-2.535
		Ant8		-1.935
		Ant7+Ant8		0.786
5700		Ant7		-2.312
		Ant8		-1.098
		Ant7+Ant8		1.348
5720		Ant7		-2.667
		Ant8		-2.251
		Ant7+Ant8		0.556
5720		Ant7	30dBm/500kHz	-5.524
		Ant8		-5.182
		Ant7+Ant8		-2.339

Test Mode:802. 11n HT20 Ant7

Test Mode:802. 11n HT20 Ant7

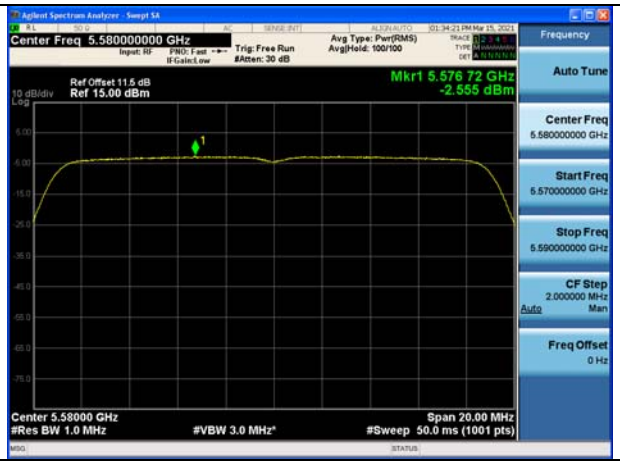

Test Mode:802. 11n HT20 Ant7

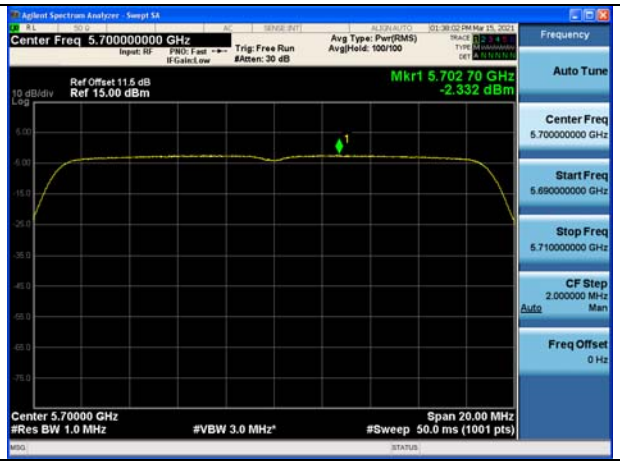

Test Mode:802. 11n HT20 Ant7

Test Mode:802. 11n HT20 Ant7

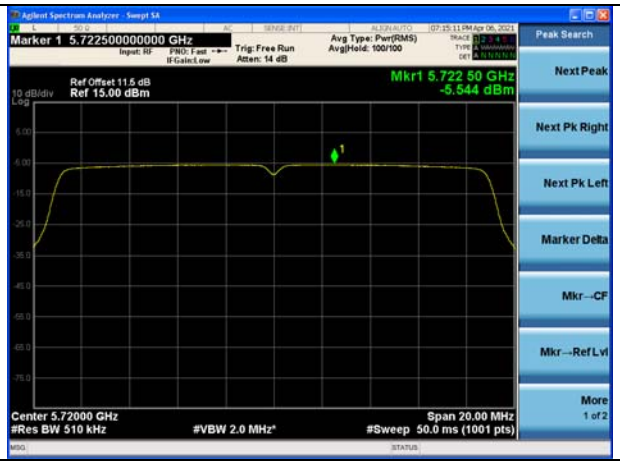

Test Mode:802. 11n HT20 Ant8

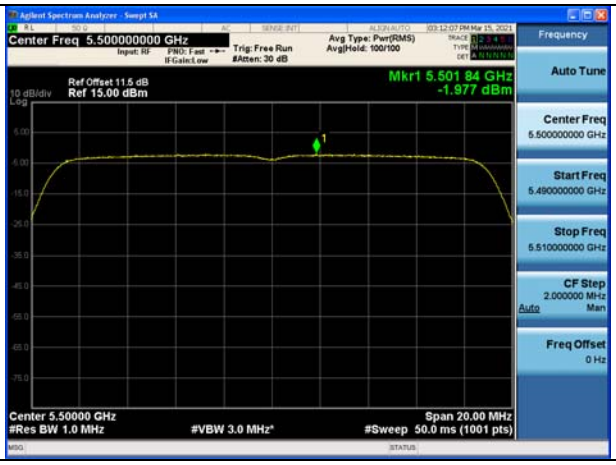

Test Mode:802. 11n HT20 Ant8

Test Mode:802. 11n HT20 Ant8

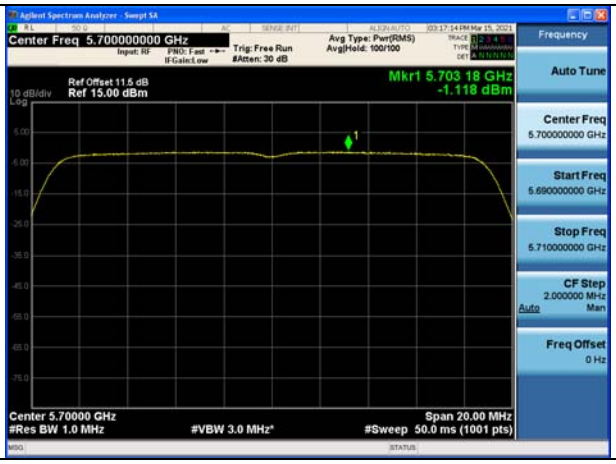

Test Mode:802. 11n HT20 Ant8

Test Mode:802. 11n HT20 Ant8

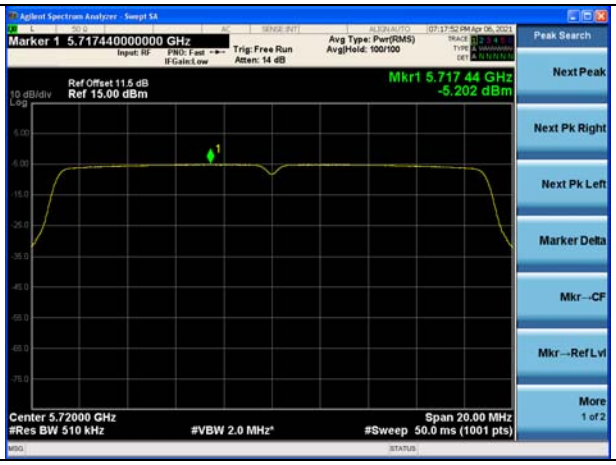

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Limit (dBm)	Power Density (dBm)
5510	0.02	Ant7	11dBm/MHz	-5.911
		Ant8		-5.062
		Ant7+Ant8		-2.455
5590		Ant7		-5.848
		Ant8		-5.140
		Ant7+Ant8		-2.469
5670		Ant7		-5.440
		Ant8		-4.624
		Ant7+Ant8		-2.003
5710		Ant7		-5.578
		Ant8		-5.128
		Ant7+Ant8		-2.337
5710		Ant7	30dBm/500kHz	-8.481
		Ant8		-8.068
		Ant7+Ant8		-5.259

Test Mode:802. 11n HT40 Ant7

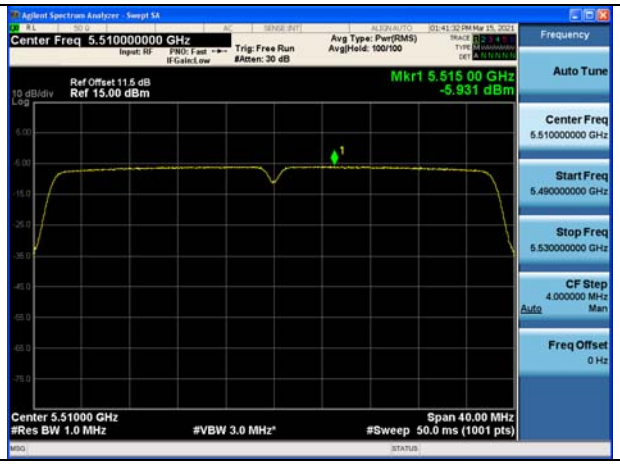

Test Mode:802. 11n HT40 Ant7

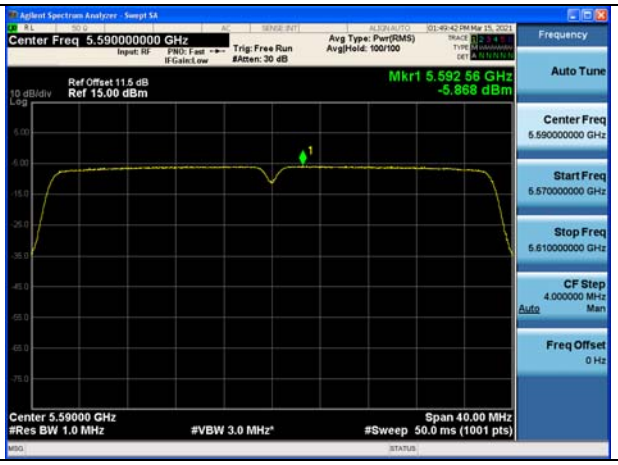

Test Mode:802. 11n HT40 Ant7

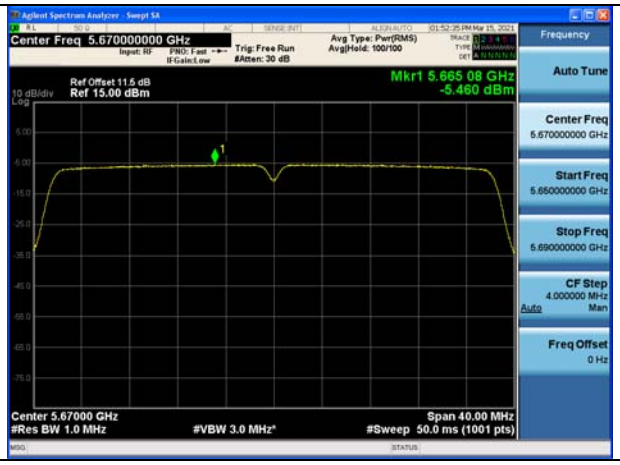

Test Mode:802. 11n HT40 Ant7

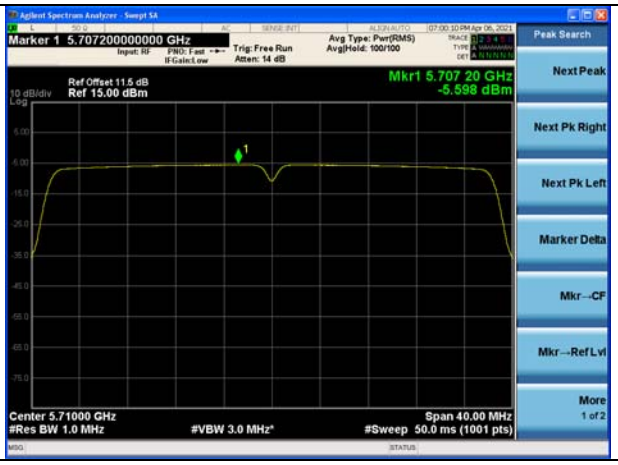

Test Mode:802. 11n HT40 Ant7

Test Mode:802. 11n HT40 Ant8

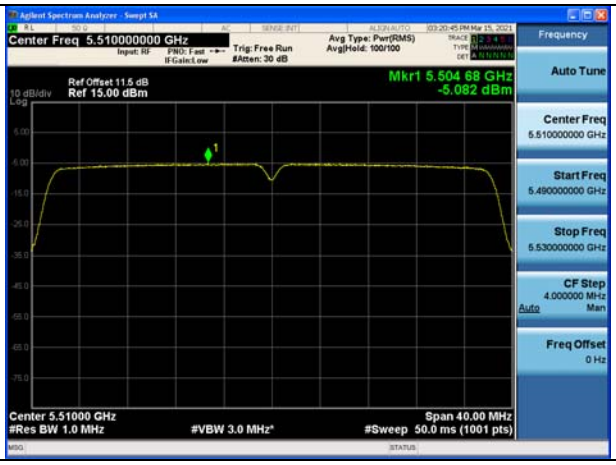

Test Mode:802. 11n HT40 Ant8

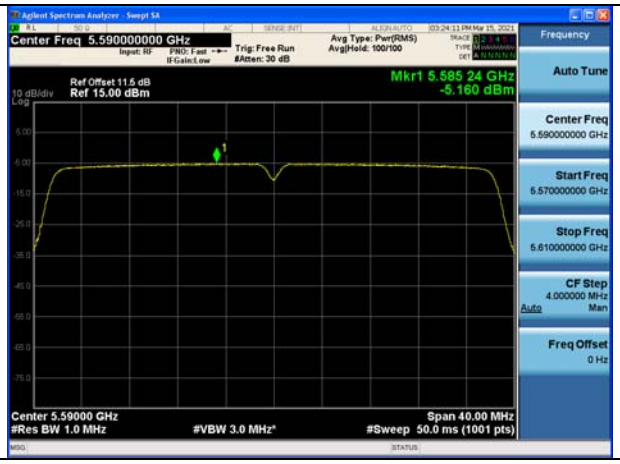

Test Mode:802. 11n HT40 Ant8

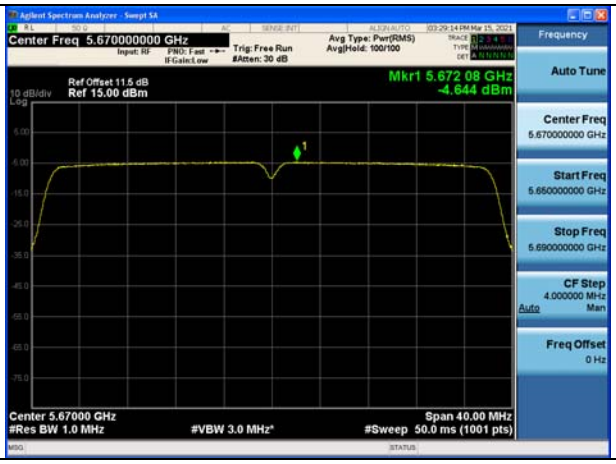

Test Mode:802. 11n HT40 Ant8

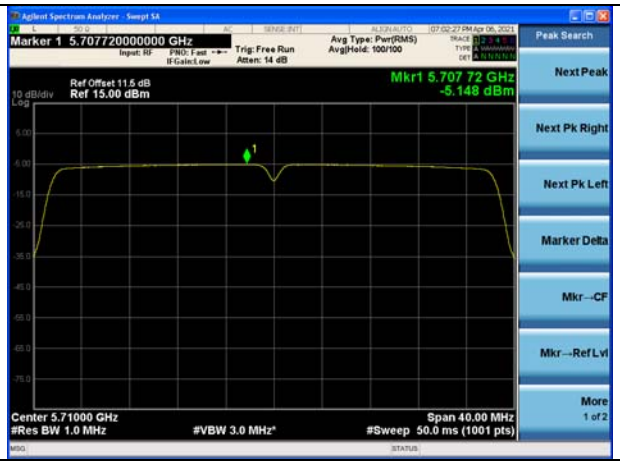

Test Mode:802. 11n HT40 Ant8

Test Mode:802. 11ac VHT80

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Limit (dBm)	Power Density (dBm)
5530	0.02	Ant7	11dBm/MHz	-8.667
		Ant8		-8.480
		Ant7+Ant8		-5.562
5610		Ant7		-8.359
		Ant8		-8.320
		Ant7+Ant8		-5.329
5690		Ant7		-8.752
		Ant8		-8.295
		Ant7+Ant8		-5.507
5690		Ant7	30dBm/500kHz	-11.663
		Ant8		-11.391
		Ant7+Ant8		-8.515

Test Mode:802. 11ac VHT80 Ant7

Test Mode:802. 11ac VHT80 Ant7

Test Mode:802. 11ac VHT80 Ant7

Test Mode:802. 11ac VHT80 Ant7

Test Mode:802. 11ac VHT80 Ant8

Test Mode:802. 11ac VHT80 Ant8

Test Mode:802. 11ac VHT80 Ant8

Test Mode:802. 11ac VHT80 Ant8

Test Mode:802. 11ac VHT160

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Power Density (dBm)
5570	0.02	Ant7	-11.772
		Ant8	-11.856
		Ant7+Ant8	-8.803

Test Mode:802. 11ac VHT160 Ant7	Test Mode:802. 11ac VHT160 Ant8

Test Mode:802.11ax HE20(26T)

Carrier frequency (MHz)	Correction Factor(dB)	Ant	Limit (dBm)	Power Density (dBm)
5500	0.02	Ant7	11dBm/MHz	1.669
		Ant8		1.339
		Ant7+Ant8		4.517
5580		Ant7		1.658
		Ant8		1.086
		Ant7+Ant8		4.392
5700		Ant7		2.175
		Ant8		2.137
		Ant7+Ant8		5.166
5720		Ant7		2.814
		Ant8		3.134
		Ant7+Ant8		5.987
5720		Ant7	30dBm/500kHz	-0.155
		Ant8		0.275
		Ant7+Ant8		3.076

Test Mode:802. 11ax HE20 Ant7

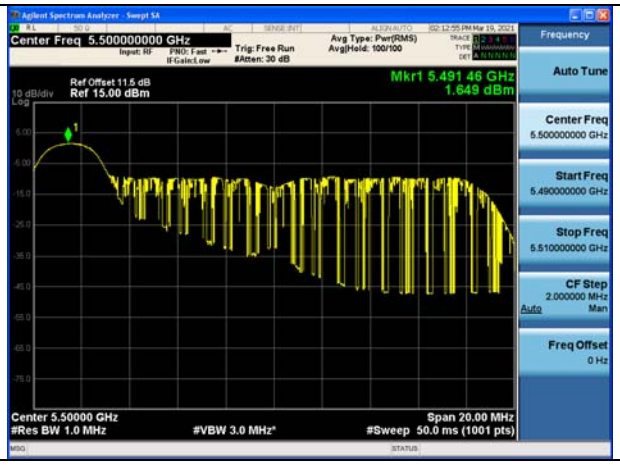

Test Mode:802. 11ax HE20 Ant7

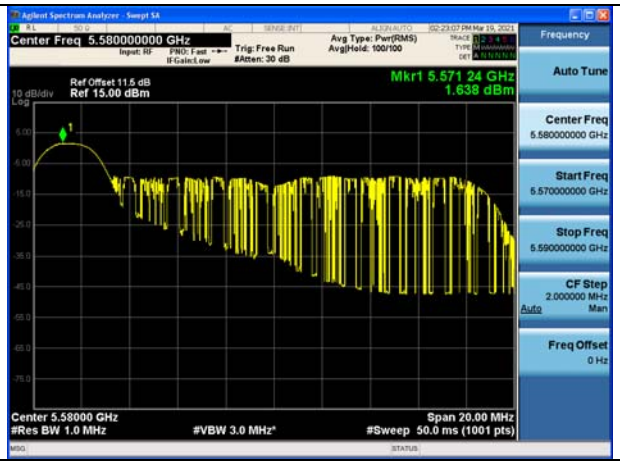

Test Mode:802. 11ax HE20 Ant7

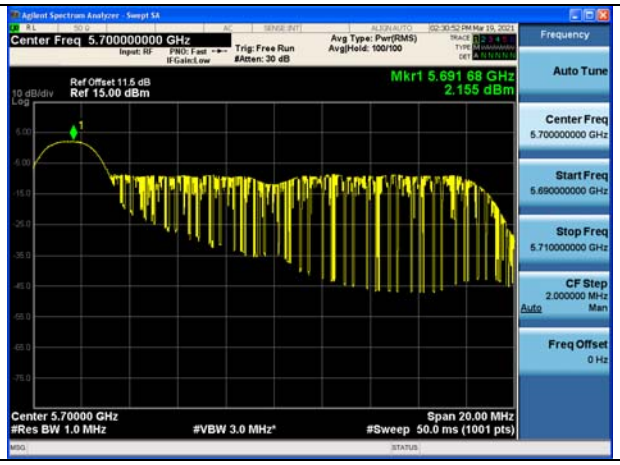

Test Mode:802. 11ax HE20 Ant7

Test Mode:802. 11ax HE20 Ant7

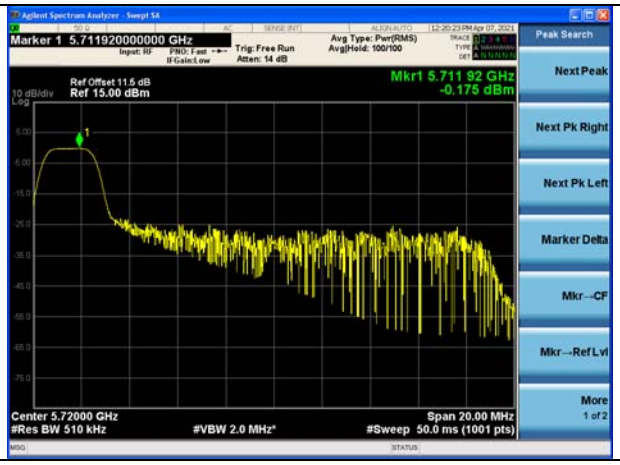

Test Mode:802. 11ax HE20 Ant8

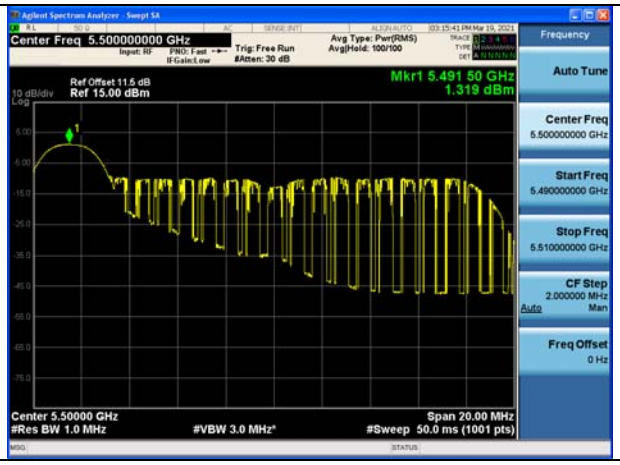

Test Mode:802. 11ax HE20 Ant8

Test Mode:802. 11ax HE20 Ant8

Test Mode:802. 11ax HE20 Ant8

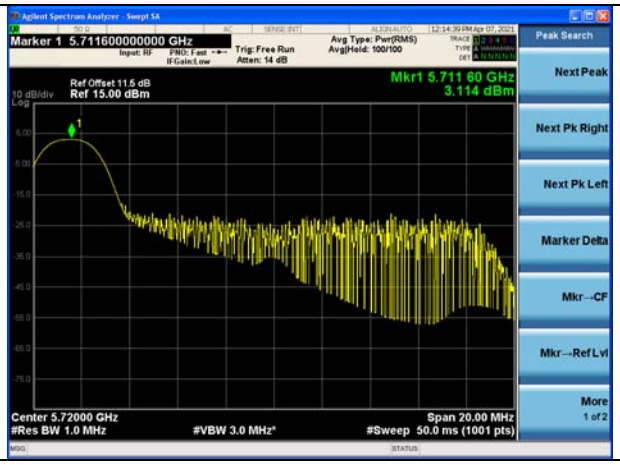
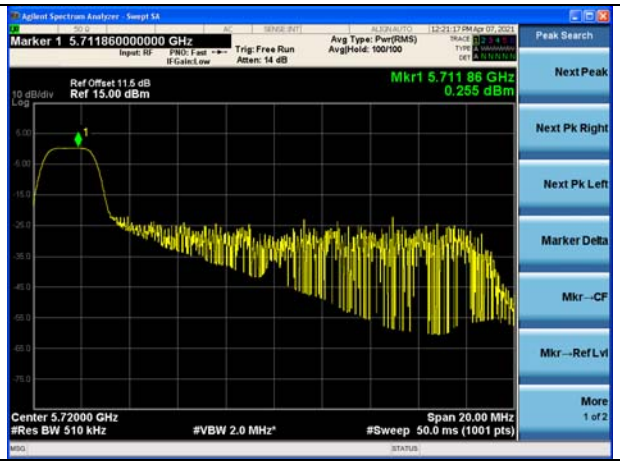
Test Mode:802. 11ax HE20 Ant8