

MEASUREMENT / TECHNICAL REPORT

SHARP CORPORATION

MODEL : MX-1000 / DocuPrint P8

FCC ID : APYPRT0032

DATE : August. 4, 1997

This report concerns(check one): Original grant _____ Class • change ×Equipment type: Laser Printer (ex.:computer,printer,modem,etc.)Transition Rules Request per 15.37? yes _____ no ×If no, assumed Part 15, Subpart B for unintentional radiators-the new 47 CFR
[10-1-90 Edition] provision.

Report prepared by: Name :

for Kf. Hayashi
Katsuhiro Fukushima

Department General Manager

Quality and Reliability Control Center

Printing and Reprographic Systems Group

Company name : SHARP CORPORATION

Address : 492 Minosho-Cho Yamatokoriyama, Nara
639-1186 Japan

Phone number : (0743) 55-4045

FAX number : (0743) 55-4440

TEST CONFIGURATION
(RADIATION AND CONDUCTION MEASUREMENT)

1. Host & Peripheral Devices

A) Personal Computer (Host)

Model No.	:	B06WW
Serial No.	:	TA65103887
FCC ID	:	AO9-B0XX6
Brand	:	digital

B) Color Monitor

Model No.	:	P1528JB
Serial No.	:	45921A2L0344
FCC ID	:	BGB SD5561C
Brand	:	DELL Computer

C) Keyboard

Model No.	:	RT6656TWJP
Serial No.	:	B2160646
FCC ID	:	AQ6-MTN4C15
Brand	:	digital

D) Mouse

Model No.	:	C3751B
Serial No.	:	LZA64322896
FCC ID	:	DZL211029
Brand	:	HEWLETT PACKARD

E) Personal Computer (Sub)

Model No.	:	PC-8501
Serial No.	:	1T100475
FCC ID	:	APYNAR0018
Brand	:	SHARP



- Continued -

F) Shielded Cables

- | | | |
|---|---|--------------|
| 1. Parallel Interface Cable (2pcs.) | : | Length 1.80m |
| 2. Video I/F Cable | : | Length 1.80m |
| [This Cable is packaged and
marketed with the Color Monitor] | | |
| 3. AC Power Cable for the Color Monitor | : | Length 2.00m |
| 4. AC Power Cable | : | Length 2.00m |
| for the Personal Computer (Host) | | |
| 5. AC Power Cable | : | Length 2.00m |
| for the Personal Computer (Sub) | | |

G) Non-Shielded Cables

- | | | |
|---|---|--------------|
| 1. Keyboard Cable | : | Length 2.00m |
| 2. Mouse Cable | : | Length 1.80m |
| 3. AC Power Cable for the Laser Printer | : | Length 1.80m |

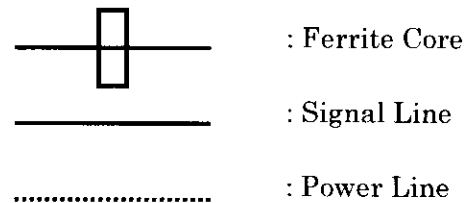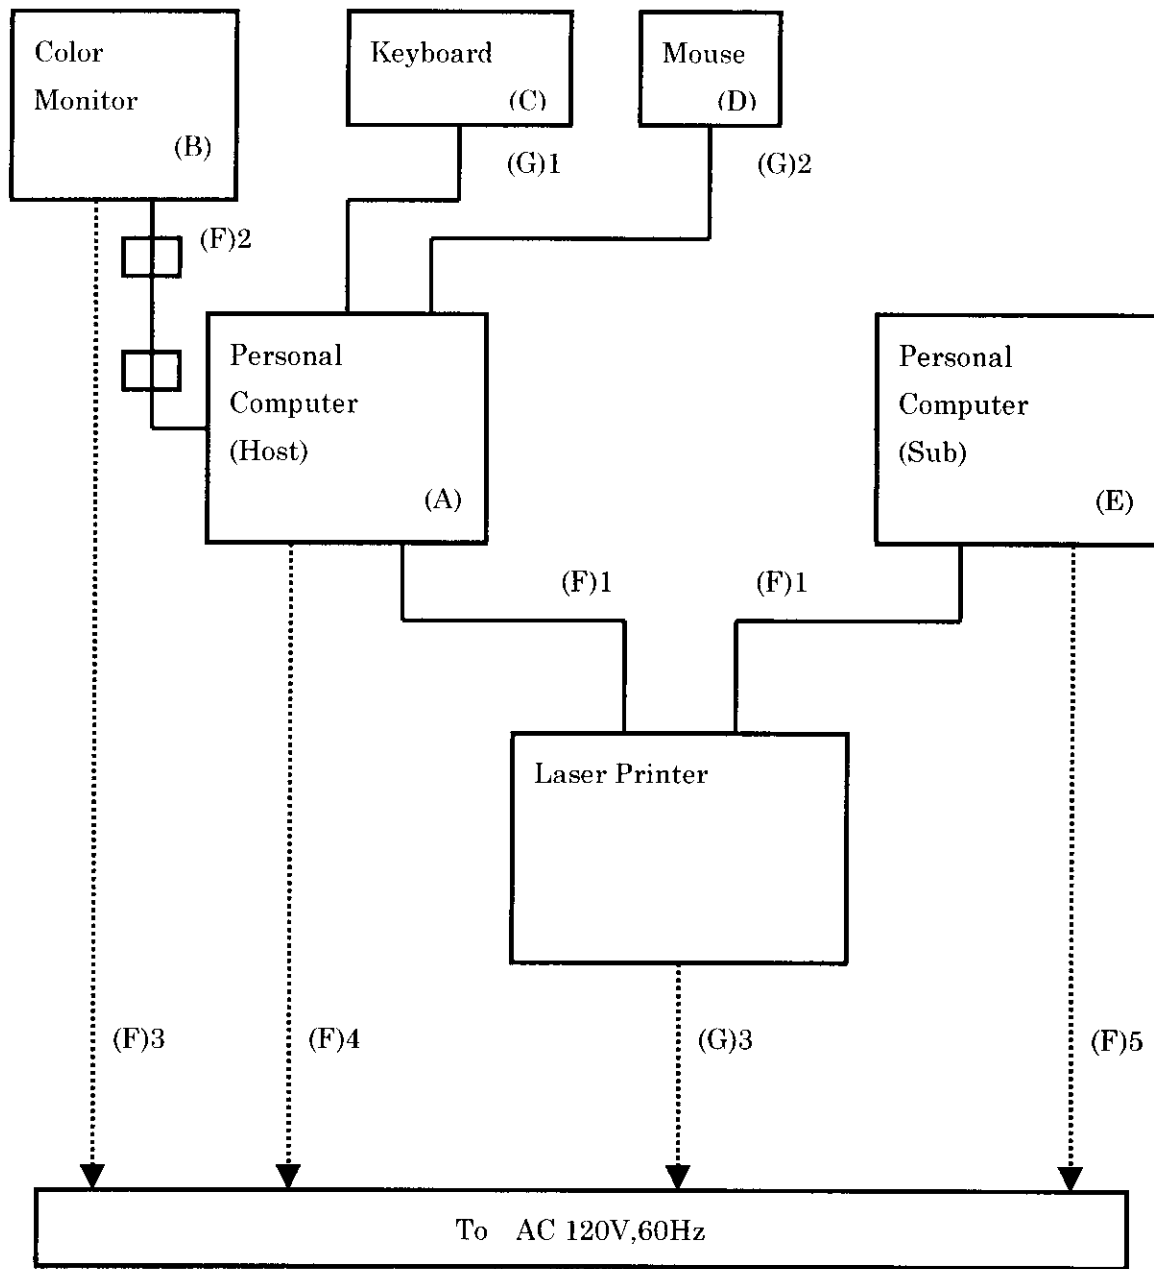TEST DIAGRAM

2. Test Operation

- (1) Turn on the EUT.
- (2) Turn on the other devices.
After a while, start Windows on the personal computer.
- (3) Open **WordPad** by **Accessories**.
- (4) Select **Open** by **File**, and open **hprint.doc** file.
- (5) Select **Print** by **File**.
- (6) The number of pages to be printed, then select **OK**.
“H” print is started.

[illegible]

RADIATION MEASUREMENT (FCC 15.109)

1. Measurement Site

Sharp Corporation Information Systems Group

Shielded Anechoic Chamber

Nara, Japan

(note) This Shielded Anechoic Chamber and Measurement Facilities has been filed with FCC.

(31040/SIT 1300F2, dated March 26, 1998)

2. Date of Measurement

May 26, 1998

3. Measurement Engineer

Name M. Ohtsuki

Section Quality and Reliability Control Center


Printing and Reprographic Systems Group

4. Measurement Methods and Test Procedures

FCC Procedure for Measuring RF Emissions from Computing Devices,

FCC/ANSI C63.4-1992 .

5. Test Arrangement

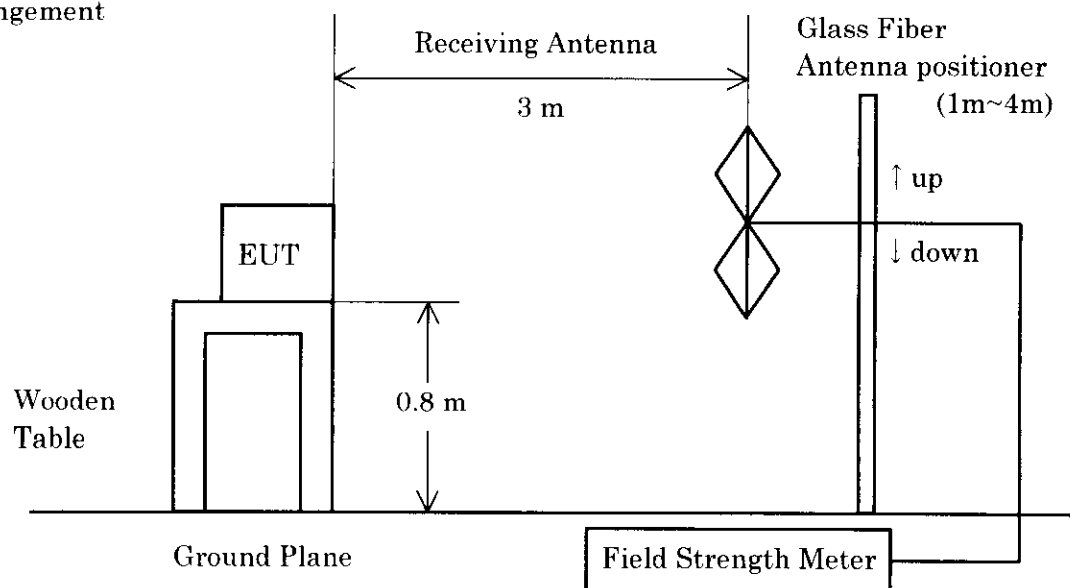

6. Operation Mode of Field Strength Meter

Detector Function CISPR Quasi-Peak

6dB Bandwidth 120kHz

7. Test Result (DocuPrint P8)

Spectrum was scanned from 30MHz to 1000MHz.

Followings data are measured when each emission is maximized, and its level is within 10 dB below the Limit.

STAND BY MODE				
Frequency (MHz)	Ant Pol H/V	Correction Factor(dB)	Meter Reading (dB μ V)	Field Strength (dB μ V/m)
65.147	H	-19.8	47.9	28.1
117.757	H	-14.0	42.8	28.8
142.286	H	-12.7	48.6	35.9
213.438	H	-10.3	36.5	26.2
493.361	H	-9.0	38.5	29.5
889.326	H	-3.2	33.3	30.1
40.001	V	-12.0	44.6	32.6
106.721	V	-16.1	45.0	28.9
117.757	V	-14.0	41.0	27.0
142.286	V	-12.7	46.4	33.7
493.361	V	-9.0	38.7	29.7
889.326	V	-3.2	38.5	35.3

(Note) •Correction Factor include Antenna Factor, Cable Loss and Pre-amplifier Gain.

Sample Calculation

106.721 MHz Vertical Polarization

$$45.0 + (-16.1) = 28.9 \text{ (dB}\mu\text{V/m)}$$

Regulation Limits

30 ~ 88MHz 100 μ V/m (40.0dB μ V/m)

88 ~ 216MHz 150 μ V/m (43.5dB μ V/m)

216 ~ 960MHz 200 μ V/m (46.0dB μ V/m)

960MHz ~ 500 μ V/m (53.9dB μ V/m)

(Measuring distance is 3m)

Test Result (DocuPrint P8)

Spectrum was scanned from 30MHz to 1000MHz.

Followings data are measured when each emission is maximized, and its level is within 10 dB below the Limit.

PRINT MODE				
Frequency (MHz)	Ant Pol H/V	Correction Factor(dB)	Meter Reading (dBμV)	Field Strength (dBμV/m)
40.000	H	-12.0	38.8	26.8
106.696	H	-16.1	45.1	29.0
142.286	H	-12.7	51.9	39.2
160.083	H	-11.6	46.4	34.8
379.435	H	-10.4	43.9	33.5
415.018	H	-10.0	47.4	37.4
40.000	V	-12.0	45.0	33.0
106.696	V	-16.1	48.6	32.5
142.286	V	-12.7	48.7	36.0
160.083	V	-11.6	43.1	31.5
379.435	V	-10.4	46.2	35.8
415.018	V	-10.0	43.6	33.6

(Note) ·Correction Factor include Antenna Factor, Cable Loss and Pre-amplifier Gain.

Sample Calculation

142.286 MHz Horizontal Polarization

$$51.9 + (-12.7) = 39.2 \text{ (dBμV/m)}$$

Regulation Limits

30 ~ 88MHz 100μV/m (40.0dBμV/m)

88 ~ 216MHz 150μV/m (43.5dBμV/m)

216 ~ 960MHz 200μV/m (46.0dBμV/m)

960MHz ~ 500μV/m (53.9dBμV/m)

(Measuring distance is 3m)

CONDUCTION MEASUREMENT (FCC 15.107)

1. Measurement Site

Sharp Corporation Information Systems Group

Shielded Room

Nara, Japan

(Note) This Measurement Facilities has been filed with FCC
 (same as Shielded Anechoic Chamber).
 (31040/SIT 1300F2, dated May. 29, 1997)

2. Date of Measurement

May 29, 1998

3. Measurement Engineer


Name M. Ohtsuki

Section Quality and Reliability Control Center
 Printing and Reprographic Systems Group

4. Measurement Methods and Test Procedures

FCC Procedure for Measuring RF Emissions from Computing Devices,
 FCC/ANSI C63.4-1992.

5. Test Arrangement

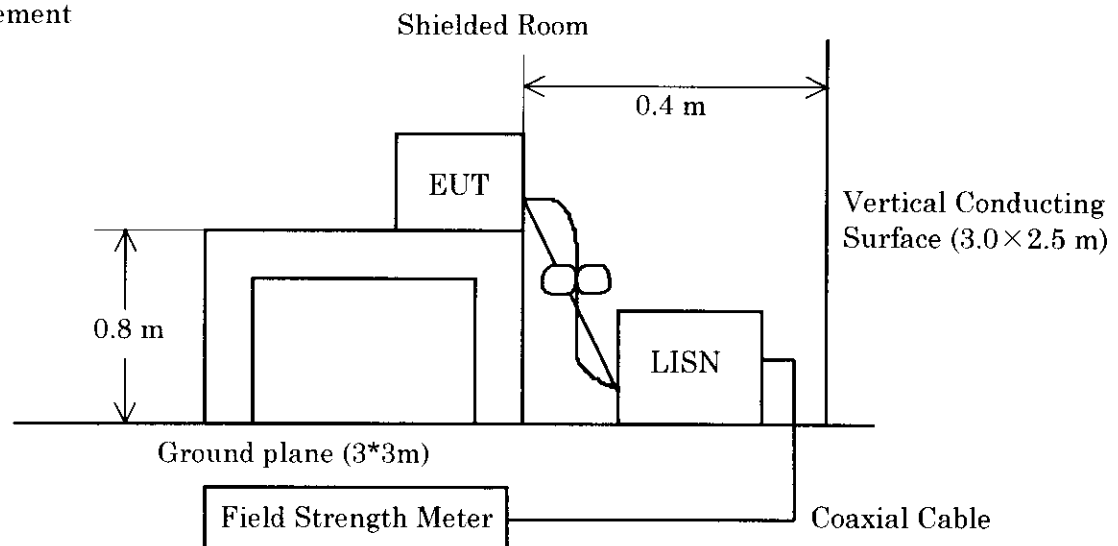

6. Operation Mode of Field Strength Meter

Detector Function CISPR Quasi-Peak/Average
 6dB Bandwidth 9kHz

7. Test Result (DocuPrint P8)

Spectrum was scanned from 450kHz to 30MHz.

Followings data are measured when each emission is maximized, and its level is within 10 dB below the Limit.

STAND BY MODE						
Frequency (MHz)	Correction Factor (dB)	QP Or AV	Meter Reading (dB μ V)		RF Voltage (dB μ V)	
			One end -Ground	Other end -Ground	One end -Ground	Other end -Ground
0.4861	+0.4	QP	27.0	25.7	27.4	26.1
0.4861	+0.4	AV	18.9	18.6	19.3	19.0
0.5836	+0.3	QP	27.4	27.5	27.7	27.8
0.5836	+0.3	AV	19.5	21.3	19.8	21.6
0.8761	+0.3	QP	30.6	30.8	30.9	31.1
0.8761	+0.3	AV	25.2	26.2	25.5	26.5
5.9495	+1.2	QP	33.4	33.7	34.6	34.9
5.9495	+1.2	AV	32.4	32.4	33.6	33.6
7.9537	+1.4	QP	34.9	34.8	36.3	36.2
7.9537	+1.4	AV	31.0	31.0	32.4	32.4
19.9935	+2.4	QP	26.5	38.0	28.9	40.4
19.9935	+2.4	AV	24.3	37.9	26.7	40.3

(Note) Correction Factor include LISN Factor and Cable Loss.

Sample Calculation

7.9537 MHz One end –Ground (QP Mode)

$$34.9 + 1.4 = 36.3 \text{ (dB}\mu\text{V)}$$

Regulation Limits

0.45MHz ~ 30MHz 250 μ V (48.0dB μ V)

Test Result (DocuPrint P8)

Spectrum was scanned from 450kHz to 30MHz.

Followings data are measured when each emission is maximized, and its level is within 10 dB below the Limit.

PRINT MODE						
Frequency (MHz)	Correction Factor (dB)	QP or AV	Meter Reading (dB μ V)		RF Voltage (dB μ V)	
			One end -Ground	Other end -Ground	One end -Ground	Other end -Ground
0.4861	+0.4	QP	40.7	40.6	41.1	41.0
0.4861	+0.4	AV	25.0	24.1	25.4	24.5
0.5836	+0.3	QP	41.2	37.1	41.5	37.4
0.5836	+0.3	AV	25.8	25.6	26.1	25.9
0.8761	+0.3	QP	31.4	32.4	31.7	32.7
0.8761	+0.3	AV	22.3	21.4	22.6	21.7
5.9495	+1.2	QP	36.0	36.1	37.2	37.3
5.9495	+1.2	AV	33.1	33.0	34.3	34.2
7.5162	+1.4	QP	44.8	44.8	33.2 46.2	33.2 46.2
7.5162	+1.4	AV	36.6	36.5	38.0	37.9
10.0214	+1.7	QP	40.0	40.0	41.7	41.7
10.0214	+1.7	AV	31.2	31.4	32.9	33.1
19.9974	+2.4	QP	33.0	35.4	35.4	37.8
19.9974	+2.4	AV	32.4	32.8	34.8	35.2

(Note) Correction Factor include LISN Factor and Cable Loss.

Sample Calculation

10.0214 MHz Other end -Ground (QP Mode)

$$40.0 + 1.7 = 41.7 \text{ (dB}\mu\text{V)}$$

Regulation Limits

0.45MHz ~ 30MHz 250 V (48.0dB μ V)

LIST OF TEST EQUIPMENT

(a) Field Strength Meter

Model No	ESVP 10
Manufacturer	Rohde & Schwarz
Serial No	346285/005
Frequency Range	20MHz~1000MHz
Operation Mode	CISPR Pub 16 Band C & D

(b) Field Strength Meter

Model No.	ESH3
Manufacturer	Rohde & Schwarz
Serial No.	872742/001
Frequency Range	9kHz~30MHz
Operation Mode	CISPR Pub 16 Band A & B

(c) Double Cone Antenna (biconical antenna)

Model No.	VHA9103 + BBA9106
Manufacturer	Schwarzbeck
Frequency Range	30MHz~300MHz

(d) Logarithmic-Periodic Antenna

Model No.	UHALP9107
Manufacturer	Schwarzbeck
Frequency Range	300MHz~1000MHz

(e) Line Impedance Stabilization Network

Model No.	KNW407
Manufacturer	Kyouritsu Electrical Works
Frequency Range	150kHz~30MHz
Specification	50 Ω , 50 μ H
Rated Capacity	250V, 15A

PHOTOGRAPHS

Photo – 1 : DocuPrint P8 Interface Control Unit PWB – CURRENT TYPE (1 / 2)

Photo – 2 : DocuPrint P8 Interface Control Unit PWB – CURRENT TYPE (2 / 2)

Photo – 3 : DocuPrint P8 Interface Control Unit PWB – NEW TYPE (1 / 2)

Photo – 4 : DocuPrint P8 Interface Control Unit PWB – NEW TYPE (2 / 2)

Photo – 5 : DocuPrint P8 Main PWB – CURRENT TYPE (1 / 2)

Photo – 6 : DocuPrint P8 Main PWB – CURRENT TYPE (2 / 2)

Photo – 7 : DocuPrint P8 Main PWB – NEW TYPE (1 / 2)

Photo – 8 : DocuPrint P8 Main PWB – NEW TYPE (2 / 2)