

EXHIBIT 6**INDEX OF SUBMITTED MEASURED DATA**

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A (Revised) – RF Power Output (Table)

EXHIBIT 6F (Revised) – Conducted Spurious Emissions (12 Tables):

- 6F-1: Lo-Power Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing
- 6F-2: Lo-Power Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing
- 6F-3: Lo-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing
- 6F-4: Hi-Power Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing
- 6F-5: Hi-Power Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing
- 6F-6: Hi-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing
- 6F-7: Lo-Power Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing
- 6F-8: Lo-Power Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing
- 6F-9: Lo-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing
- 6F-10: Hi-Power Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing
- 6F-11: Hi-Power Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing
- 6F-12: Hi-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

EXHIBIT 6G (Revised) – Radiated Spurious Emissions (18 Graphs):

- 6G-1: Hi-Power, 380.0125 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-2: Hi-Power, 425.0125 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-3: Hi-Power, 469.9875 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-4: Hi-Power, 380.0125 MHz, 25 kHz Channel Spacing, Clear
- 6G-5: Hi-Power, 425.0125 MHz, 25 kHz Channel Spacing, Clear
- 6G-6: Hi-Power, 469.9875 MHz, 25 kHz Channel Spacing, Clear
- 6G-7: Lo-Power, 380.0125 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-8: Lo-Power, 425.0125 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-9: Lo-Power, 469.9875 MHz, 12.5 kHz Channel Spacing, Clear
- 6G-10: Lo-Power, 380.0125 MHz, 25 kHz Channel Spacing, Clear
- 6G-11: Lo-Power, 425.0125 MHz, 25 kHz Channel Spacing, Clear
- 6G-12: Lo-Power, 469.9875 MHz, 25 kHz Channel Spacing, Clear
- 6G-13: Hi-Power, 380.0125 MHz, 25 kHz Channel Spacing, Secure
- 6G-14: Hi-Power, 425.0125 MHz, 25 kHz Channel Spacing, Secure
- 6G-15: Hi-Power, 469.9875 MHz, 25 kHz Channel Spacing, Secure
- 6G-16: Lo-Power, 380.0125 MHz, 25 kHz Channel Spacing, Secure
- 6G-17: Lo-Power, 425.0125 MHz, 25 kHz Channel Spacing, Secure
- 6G-18: Lo-Power, 469.9875 MHz, 25 kHz Channel Spacing, Secure

EXHIBIT 6A**RF Conducted Power Output Data** -- Pursuant 47 CFR 2.1046(a), 2.1033(c)(6), 2.1033(c)(7) and 2.1033(c)(8)

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q101).

At maximum output power setting, Frequency 380.0125 MHz:

Output RF power	5.90 Watts
DC Voltage	7.50 Volts
DC Current	2.04 Amps
DC Input Power	15.30 Watts

At minimum output power setting, Frequency 380.0125 MHz:

Output RF power	0.245 Watts
DC Voltage	7.50 Volts
DC Current	0.67 Amps
DC Input Power	5.025 Watts

At maximum output power setting, Frequency 425.0125 MHz:

Output RF power	5.90 Watts
DC Voltage	7.50 Volts
DC Current	1.88 Amps
DC Input Power	14.10 Watts

At minimum output power setting, Frequency 425.0125 MHz:

Output RF power	0.253 Watts
DC Voltage	7.50 Volts
DC Current	0.61 Amps
DC Input Power	4.575 Watts

At maximum output power setting, Frequency 469.9875 MHz:

Output RF power	5.82 Watts
DC Voltage	7.50 Volts
DC Current	2.12 Amps
DC Input Power	15.90 Watts

At minimum output power setting, Frequency 469.9875 MHz:

Output RF power	0.247 Watts
DC Voltage	7.50 Volts
DC Current	0.62 Amps
DC Input Power	4.65 Watts

EXHIBIT 6F (Revised)

Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

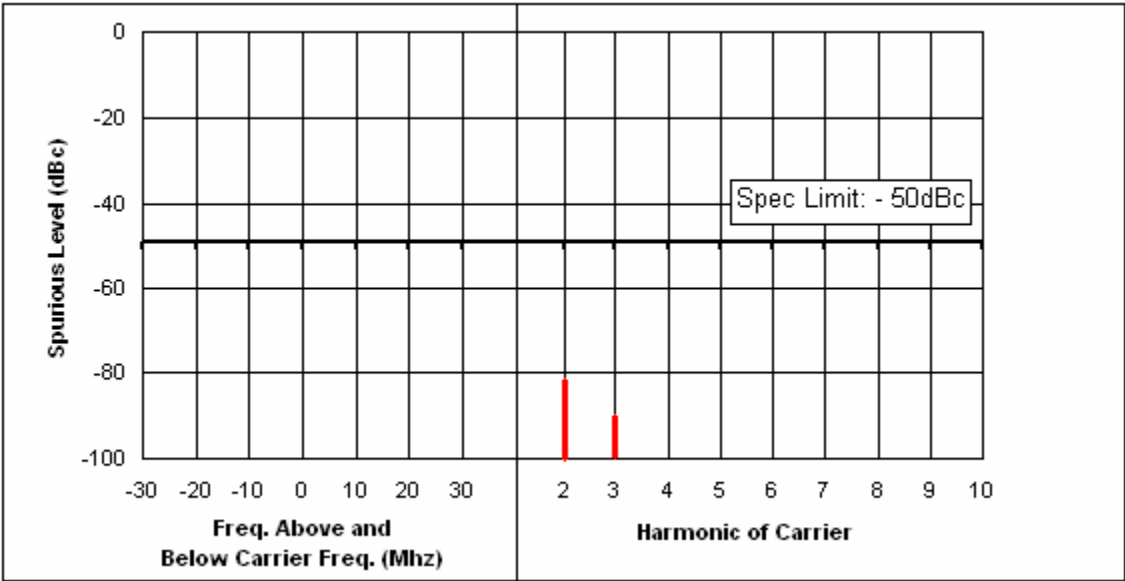


Table 6F-1: Lo Power Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

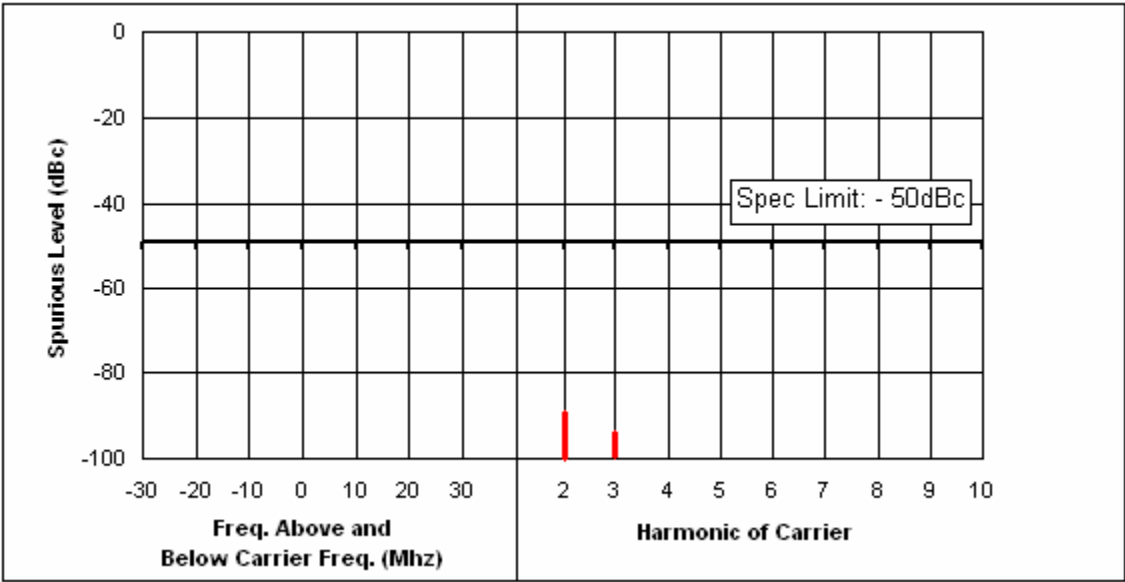


Table 6F-2: Lo Power Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

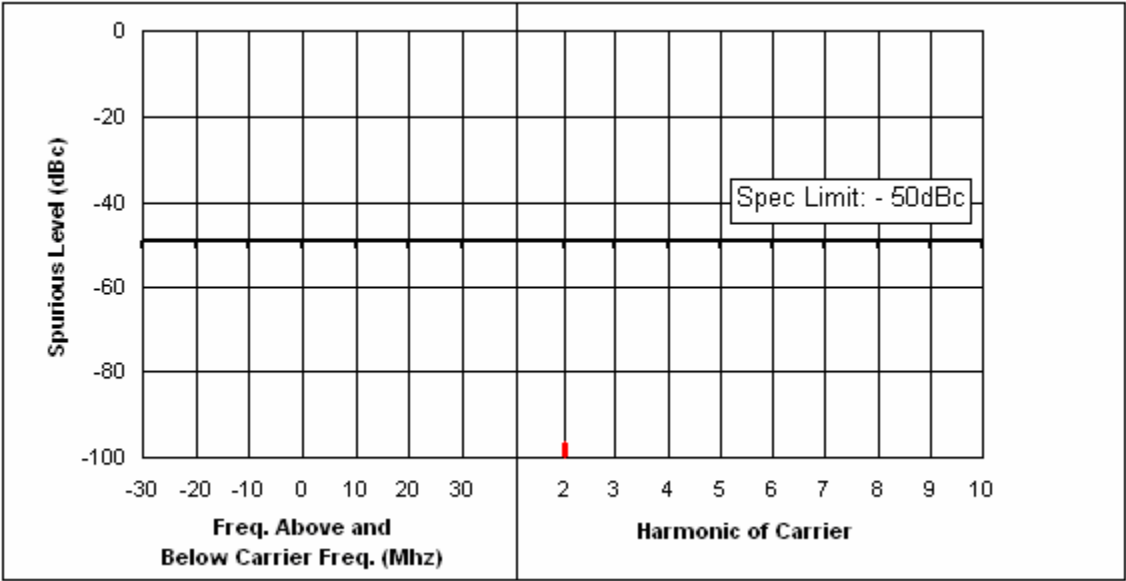


Table 6F-3: Lo Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

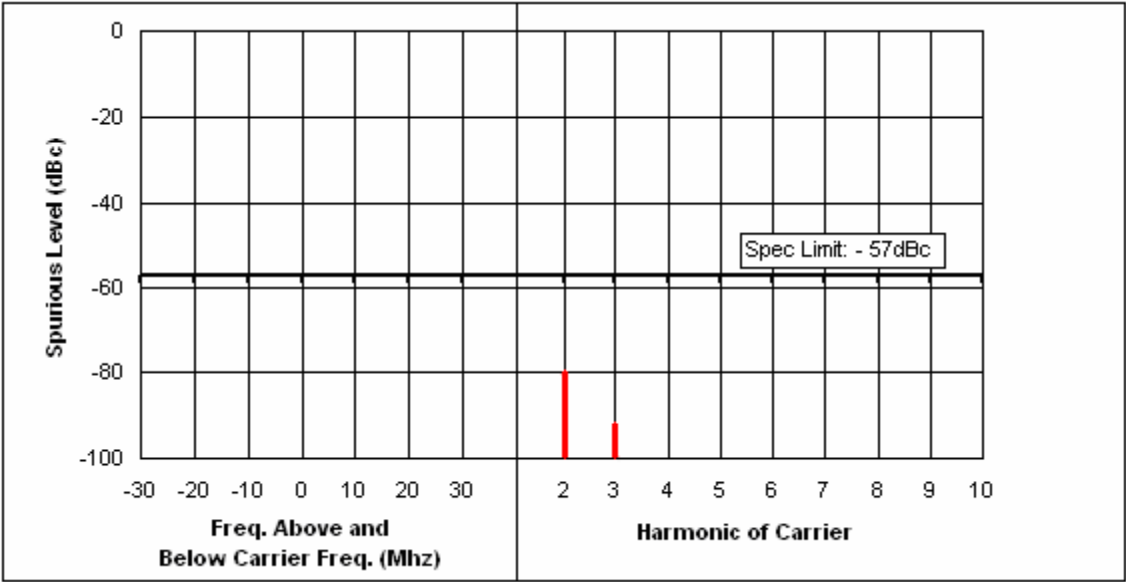


Table 6F-4: Hi Power Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

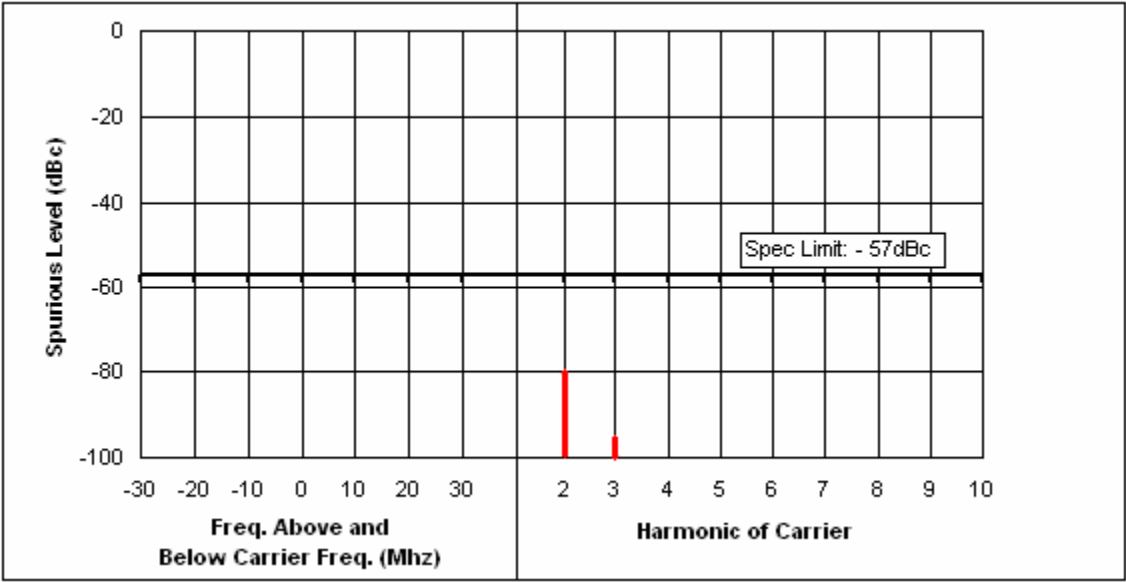


Table 6F-5: Hi Power Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

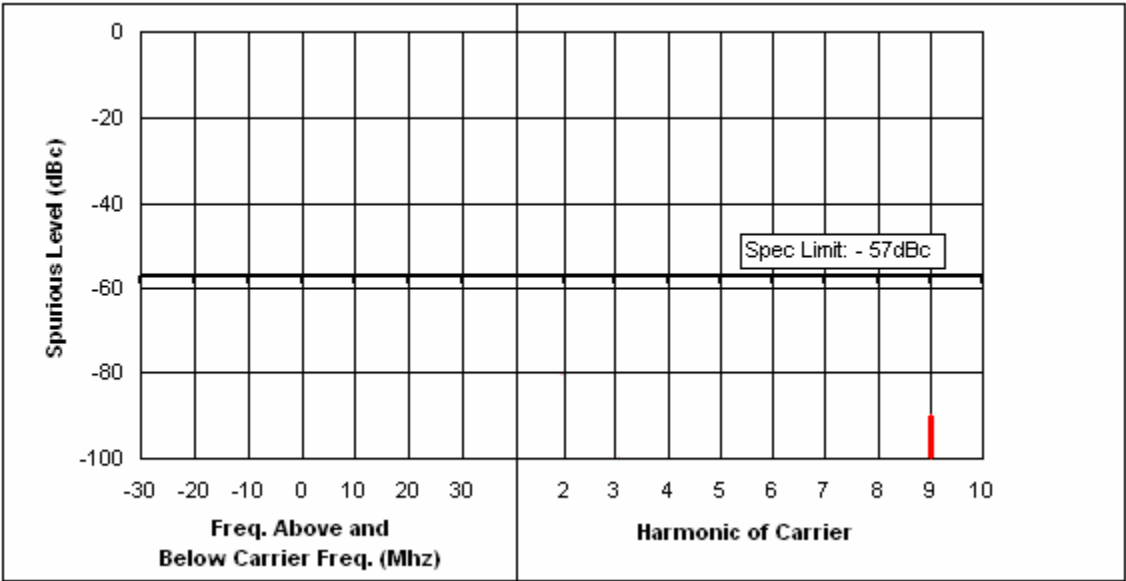


Table 6F-6: Hi Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

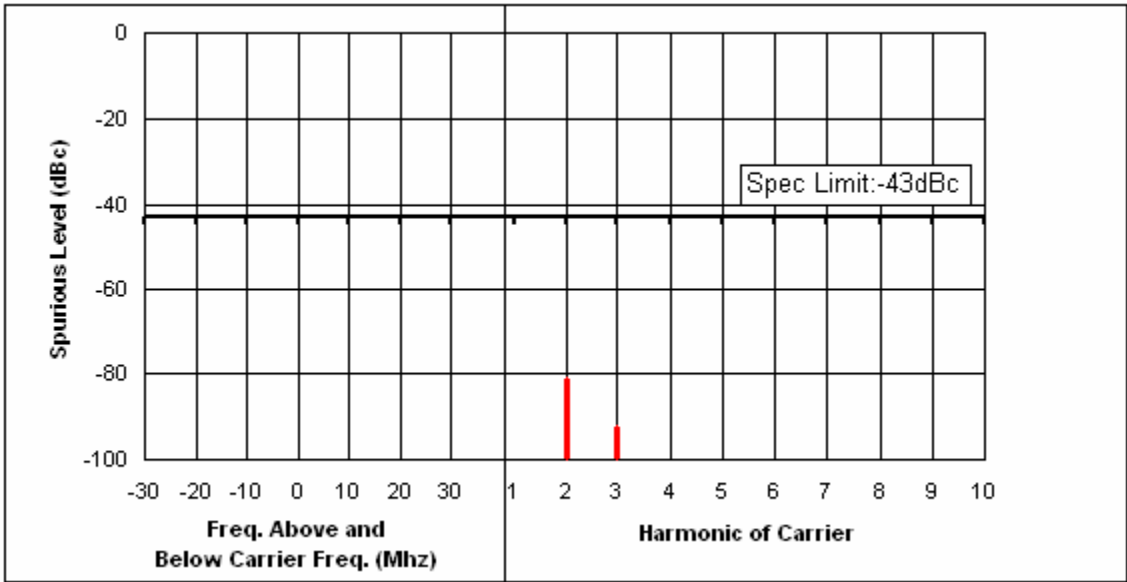


Table 6F-7: Lo Power Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing

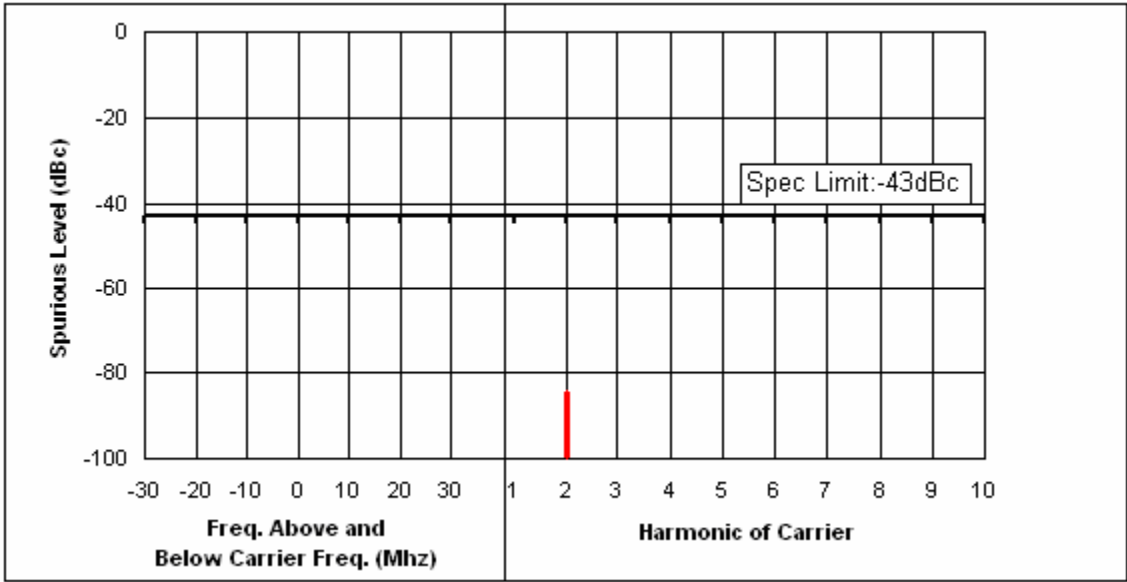


Table 6F-8: Lo Power Harmonic of Carrier 425.0125, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

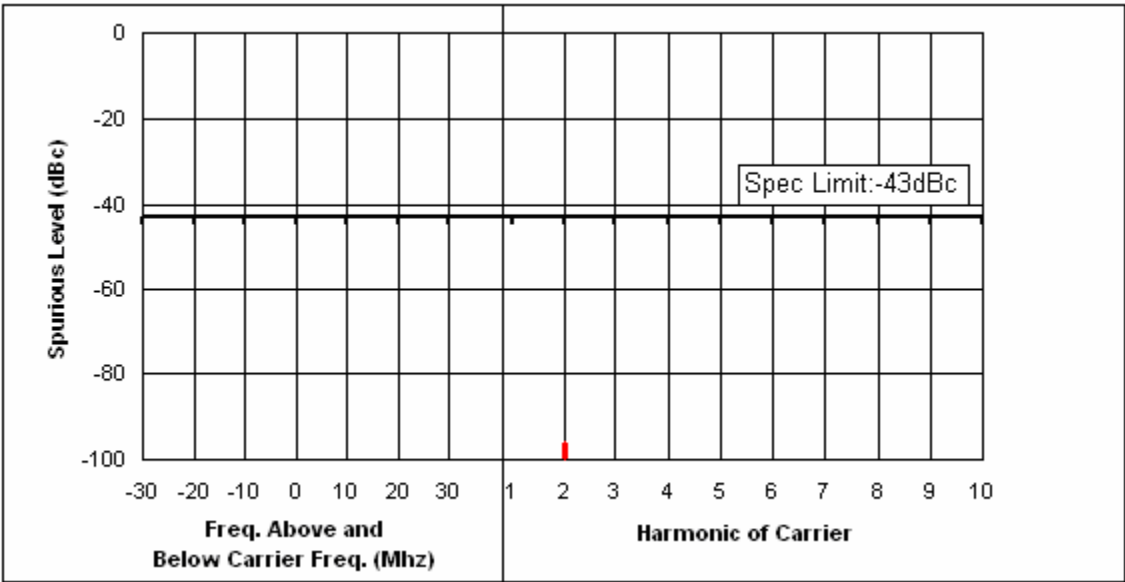


Table 6F-9: Lo Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

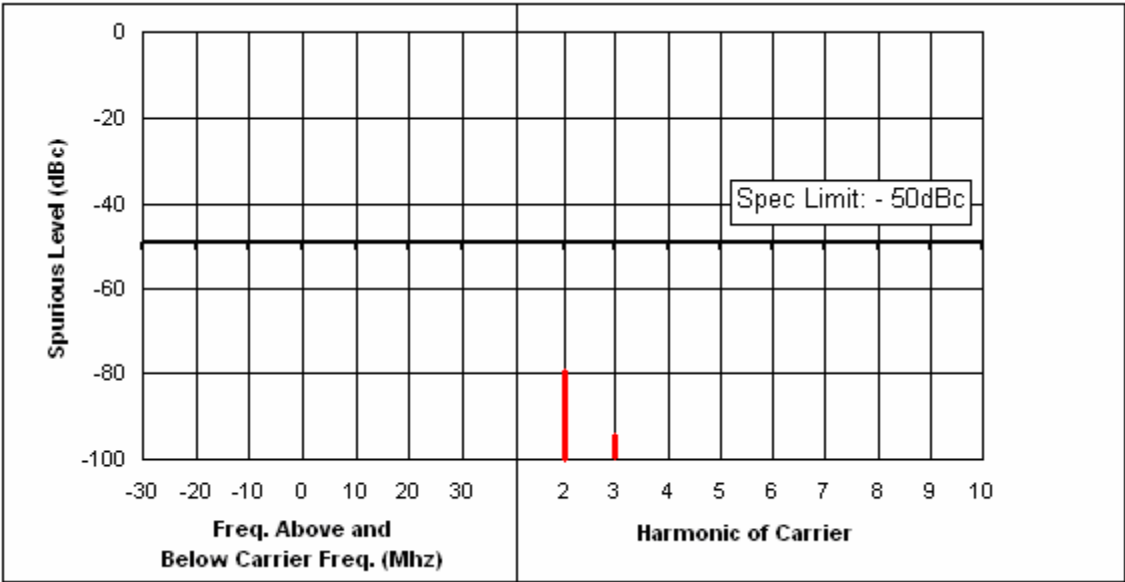


Table 6F-10: Hi Power Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

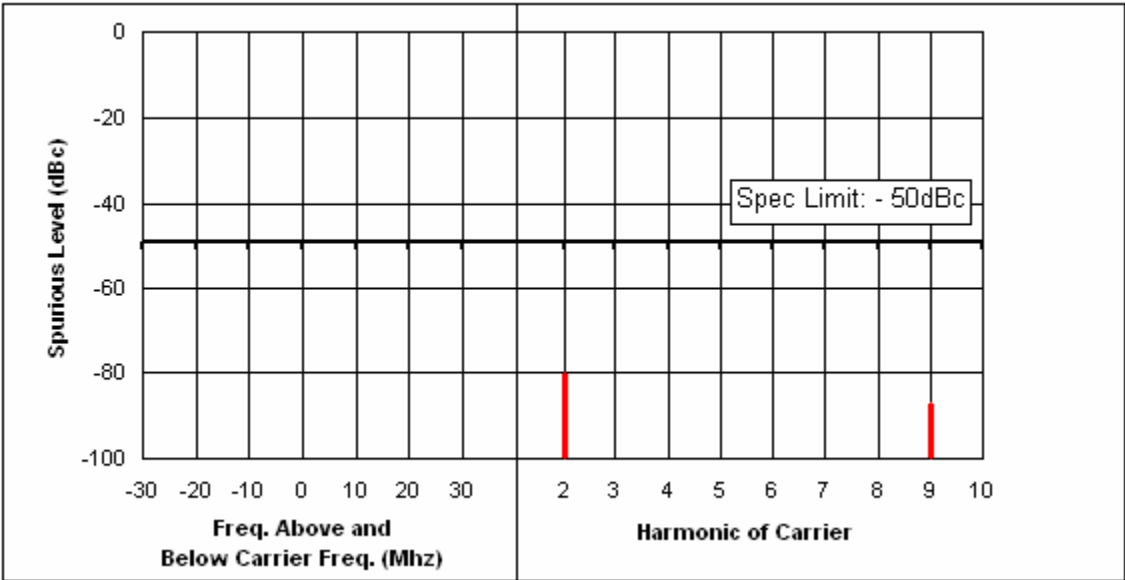


Table 6F-11: Hi Power Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing

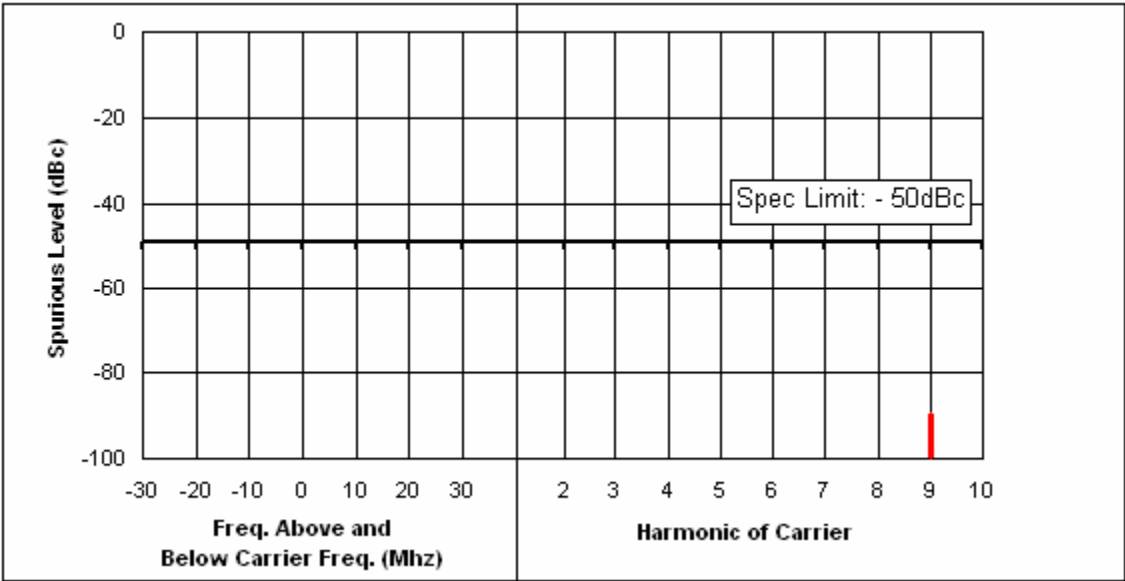
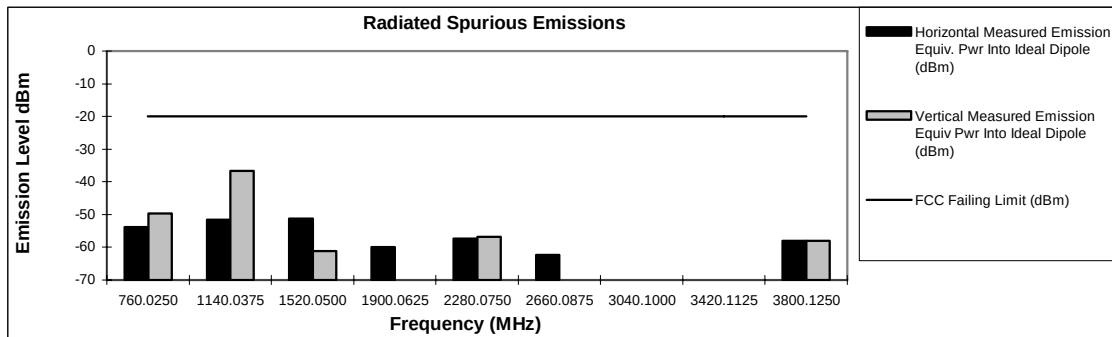


Table 6F-12: Hi Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing


Note: Spurs which are not shown is 50dB below the specification limits.

EXHIBIT 6G (Revised)**Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)****Tx Power: 5.9 Watts****380.0125 MHz****Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-20	-53.87	-49.68
1140.0375	-20	-51.67	-36.66
1520.0500	-20	-51.26	-61.08
1900.0625	-20	-60.00	*
2280.0750	-20	-57.32	-56.85
2660.0875	-20	-62.38	*
3040.1000	-20	*	*
3420.1125	-20	*	*
3800.1250	-20	-57.97	-58.06

**Graph 6G – 1: Hi-Power, 380.0125 MHz, 12.5 kHz Channel Spacing****Tx Power: 5.9 Watts****425.0125 MHz****Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	-62.25	-59.79
1275.0375	-20	-51.91	-38.18
1700.0500	-20	-59.22	-59.68
2125.0625	-20	-42.53	-58.51
2550.0750	-20	-59.50	-58.98
2975.0875	-20	-62.80	-60.93
3400.1000	-20	-62.94	-56.70
3825.1125	-20	-52.89	-54.26
4250.1250	-20	-44.85	-52.73

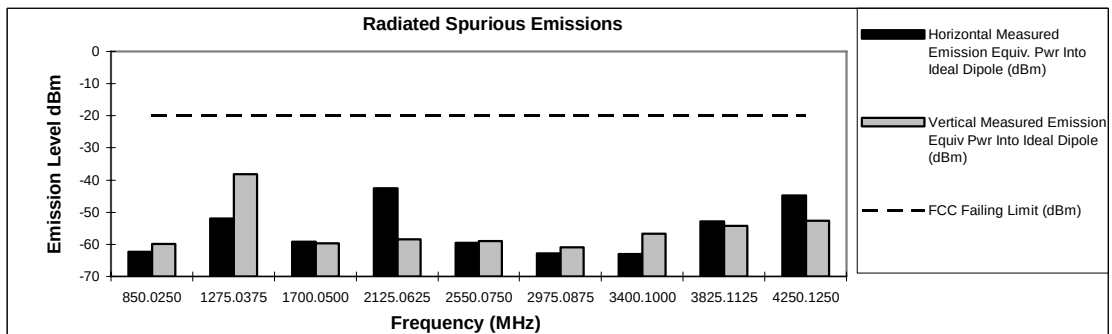

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 2: Hi-Power, 425.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 5.9 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-65.51	-60.40
1409.9625	-20	-55.13	-49.50
1879.9500	-20	-56.28	-58.60
2349.9375	-20	-51.37	-50.97
2819.9250	-20	-57.96	-59.35
3289.9125	-20	-55.39	-57.22
3759.9000	-20	-54.47	-55.95
4229.8875	-20	-43.44	-49.59
4699.8750	-20	-44.21	-49.83

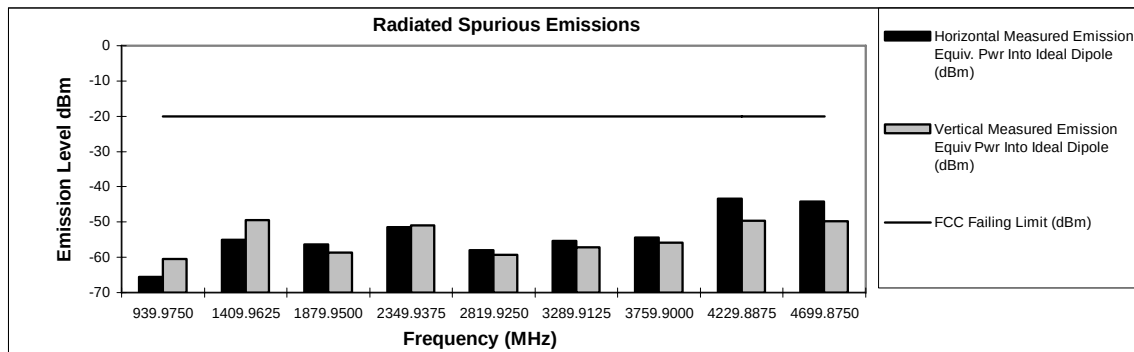


Graph 6G – 3: Hi-Power, 469.9875 MHz, 12.5 kHz Channel Spacing

Tx Power: 5.9 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-51.53	-44.02
1140.0375	-13	-51.08	-46.82
1520.0500	-13	-62.67	-61.56
1900.0625	-13	-58.76	-59.78
2280.0750	-13	-58.40	-58.80
2660.0875	-13	-62.27	-60.74
3040.1000	-13	-63.76	*
3420.1125	-13	-61.87	-58.54
3800.1250	-13	-60.63	*

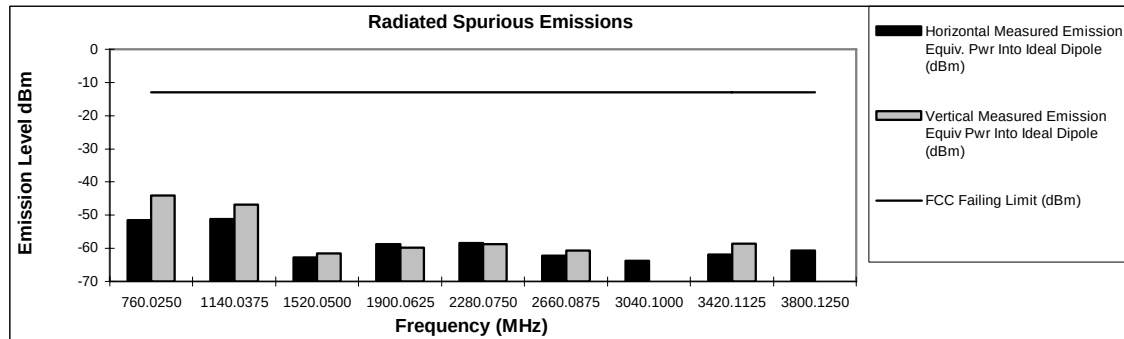


Graph 6G – 4: Hi-Power, 380.0125 MHz, 25 kHz Channel Spacing

Tx Power: 5.9 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-60.80	-59.85
1275.0375	-13	-51.11	-37.53
1700.0500	-13	-59.92	-61.52
2125.0625	-13	-52.07	-53.28
2550.0750	-13	-59.28	-57.82
2975.0875	-13	-61.51	-59.82
3400.1000	-13	-59.56	-58.62
3825.1125	-13	-53.55	-53.46
4250.1250	-13	-45.67	-49.41

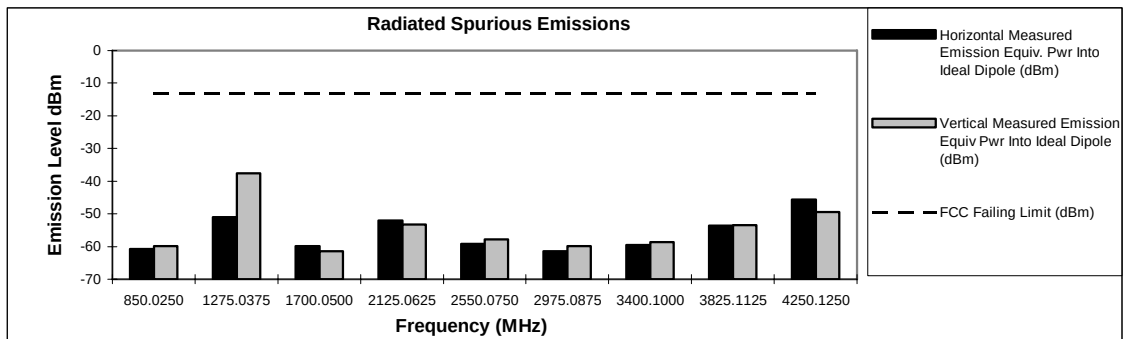


Graph 6G – 5: Hi-Power, 425.0125 MHz, 25 kHz Channel Spacing

Tx Power: 5.9 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	-68.06	-59.60
1409.9625	-13	-57.17	-50.76
1879.9500	-13	-58.00	-55.82
2349.9375	-13	-44.46	-45.58
2819.9250	-13	-57.75	-60.33
3289.9125	-13	-56.52	-55.96
3759.9000	-13	-54.73	-54.58
4229.8875	-13	*	*
4699.8750	-13	*	*

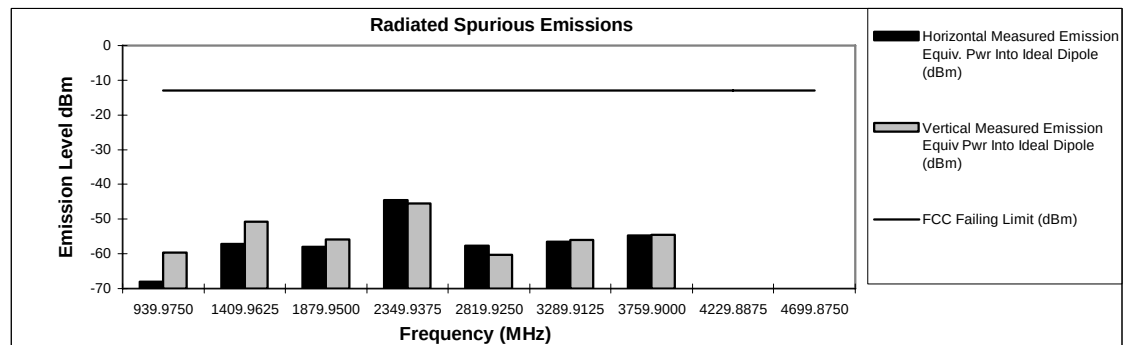


Graph 6G – 6: Hi-Power, 469.9875 MHz, 25 kHz Channel Spacing

Tx Power: 0.25 Watts

380.0125 MHz

Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-20	-65.32	-59.02
1140.0375	-20	-74.10	-70.30
1520.0500	-20	*	*
1900.0625	-20	*	*
2280.0750	-20	*	*
2660.0875	-20	*	*
3040.1000	-20	*	*
3420.1125	-20	*	*
3800.1250	-20	*	*

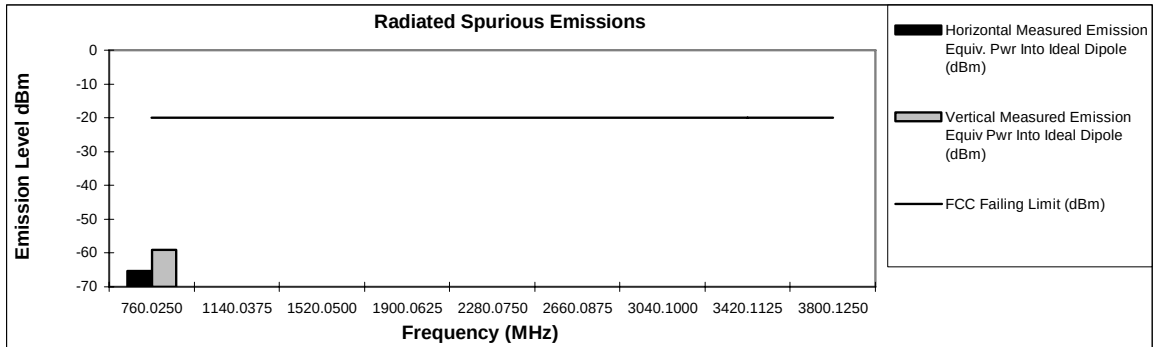


Graph 6G – 7: Lo-Power, 380.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 0.25 Watts

425.0125 MHz

Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	-69.50	-64.10
1275.0375	-20	*	-66.25
1700.0500	-20	*	*
2125.0625	-20	*	*
2550.0750	-20	*	*
2975.0875	-20	-63.30	*
3400.1000	-20	*	*
3825.1125	-20	*	*
4250.1250	-20	*	*

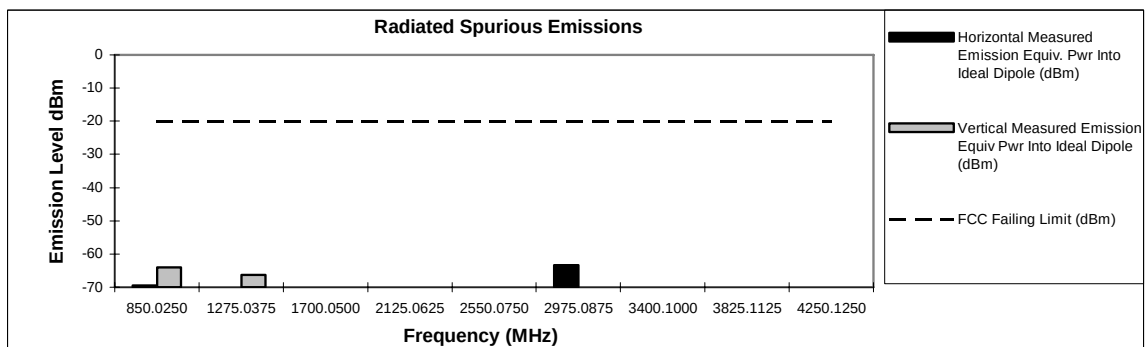

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 8: Lo-Power, 425.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 0.25 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-68.12	-60.69
1409.9625	-20	*	-69.86
1879.9500	-20	*	*
2349.9375	-20	-65.24	-63.61
2819.9250	-20	-63.93	-60.84
3289.9125	-20	-55.93	-56.44
3759.9000	-20	-61.50	*
4229.8875	-20	-58.16	-57.61
4699.8750	-20	-59.57	-55.77

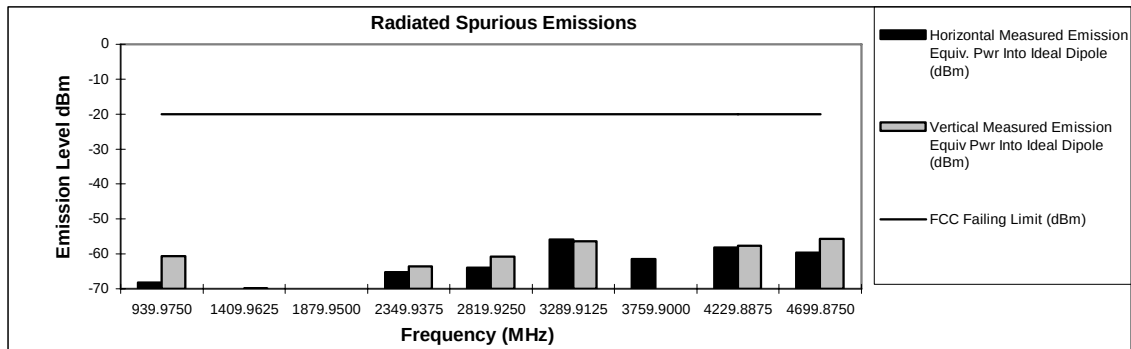


Graph 6G – 9: Lo-Power, 469.9875 MHz, 12.5 kHz Channel Spacing

Tx Power: 0.25 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-56.16	-53.97
1140.0375	-13	-73.11	-72.02
1520.0500	-13	*	*
1900.0625	-13	*	*
2280.0750	-13	*	*
2660.0875	-13	*	*
3040.1000	-13	*	*
3420.1125	-13	*	*
3800.1250	-13	*	*

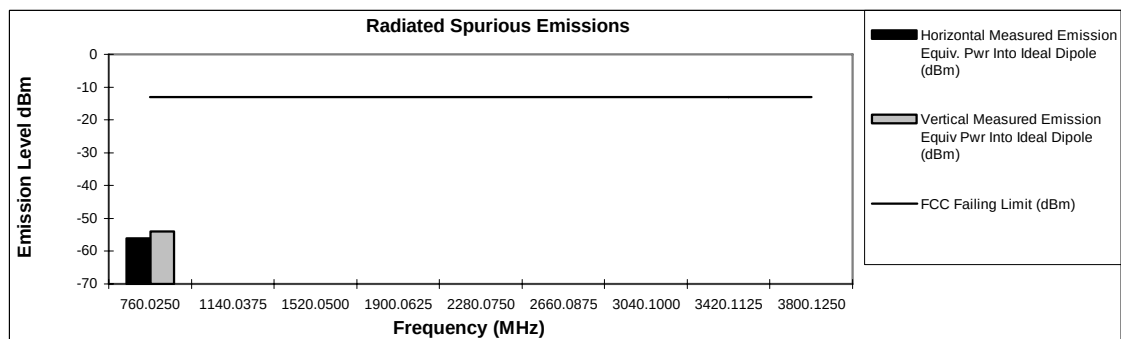


Graph 6G – 10: Lo-Power, 380.0125 MHz, 25 kHz Channel Spacing

Tx Power: 0.25 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-68.97	*
1275.0375	-13	*	*
1700.0500	-13	*	*
2125.0625	-13	*	*
2550.0750	-13	*	*
2975.0875	-13	*	*
3400.1000	-13	*	*
3825.1125	-13	*	*
4250.1250	-13	*	*

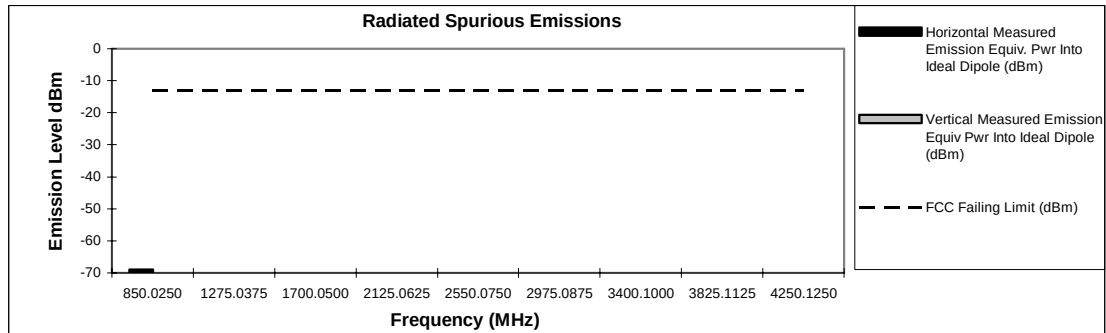


Graph 6G - 11: Lo-Power, 425.0125 MHz, 25 kHz Channel Spacing

Tx Power: 0.25 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TH6FM04D CLEAR

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	*	*
1409.9625	-13	*	*
1879.9500	-13	*	*
2349.9375	-13	*	*
2819.9250	-13	*	*
3289.9125	-13	*	*
3759.9000	-13	*	*
4229.8875	-13	*	*
4699.8750	-13	*	*

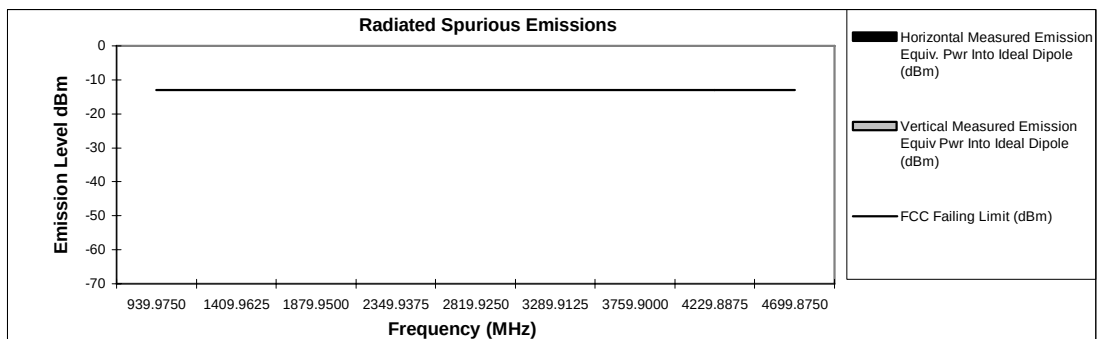


Graph 6G - 12: Lo-Power, 469.9875 MHz, 25 kHz Channel Spacing

Tx Power: 5.9 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-53.30	-50.13
1140.0375	-13	-53.40	-45.26
1520.0500	-13	-68.41	-64.41
1900.0625	-13	-64.18	-65.36
2280.0750	-13	-60.25	-60.64
2660.0875	-13	-65.65	*
3040.1000	-13	*	*
3420.1125	-13	-63.69	*
3800.1250	-13	-64.08	*

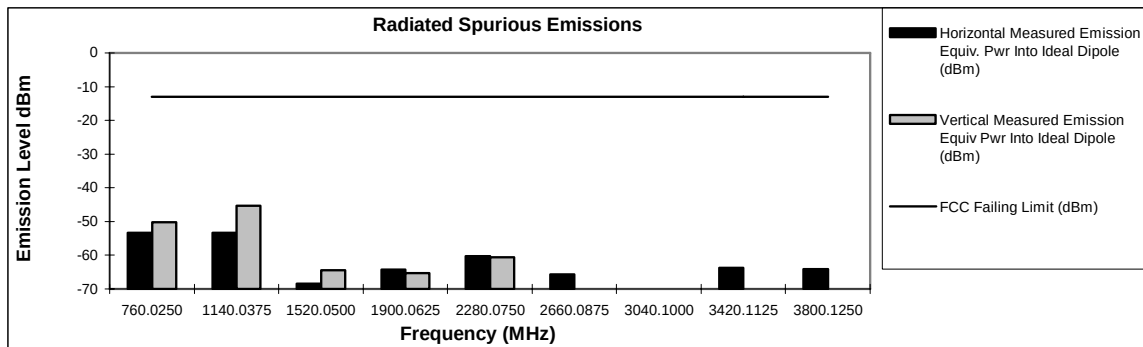


Graph 6G-13: Hi-Power, 380.0125 MHz, 25 kHz Channel Spacing, Secure

Tx Power: 5.9 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-63.06	-62.18
1275.0375	-13	-52.19	-38.24
1700.0500	-13	-62.53	-63.47
2125.0625	-13	-48.95	-55.55
2550.0750	-13	-62.83	-62.10
2975.0875	-13	-62.70	*
3400.1000	-13	-64.16	-59.30
3825.1125	-13	-59.41	-57.18
4250.1250	-13	-51.56	-56.67

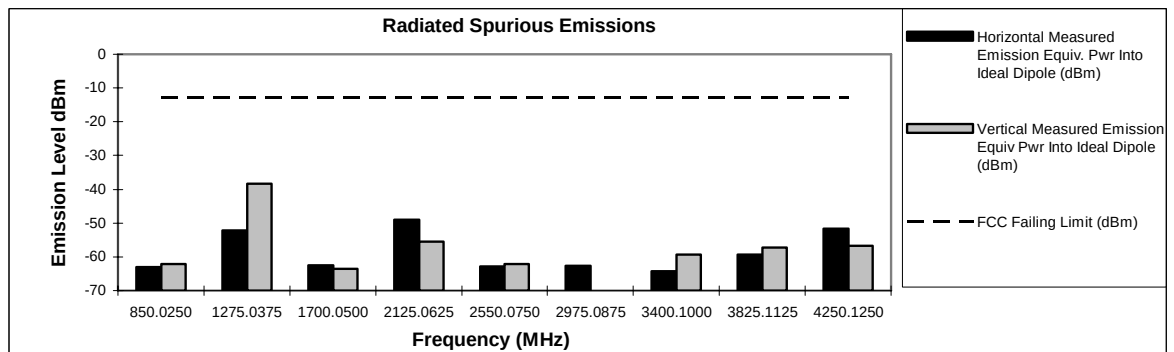

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G-14: Hi-Power, 425.0125 MHz, 25 kHz Channel Spacing, Secure

Tx Power: 5.9 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	-65.62	-64.52
1409.9625	-13	-56.90	-51.29
1879.9500	-13	-59.97	-62.32
2349.9375	-13	-52.91	-50.05
2819.9250	-13	-62.46	-60.75
3289.9125	-13	-63.43	-59.47
3759.9000	-13	-62.19	-58.73
4229.8875	-13	-51.88	-55.68
4699.8750	-13	-52.19	-54.96

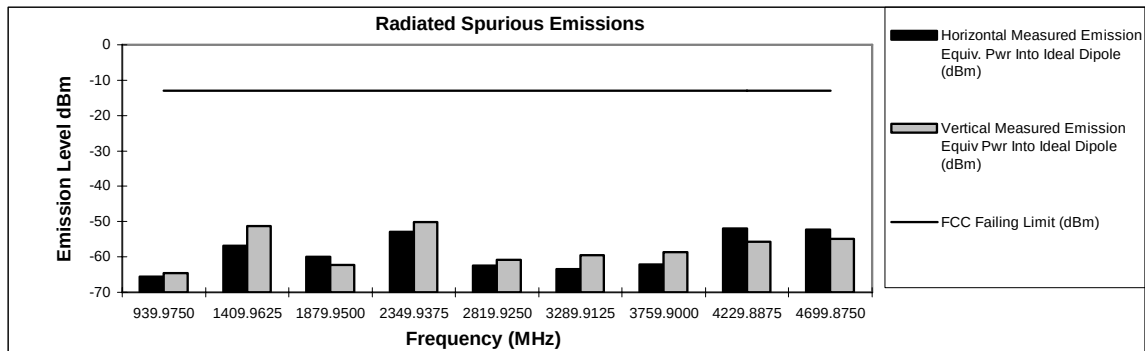


Graph 6G-15: Hi-Power, 469.9875 MHz, 25 kHz Channel Spacing, Secure

Tx Power: 0.25 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-65.26	-57.69
1140.0375	-13	*	-72.55
1520.0500	-13	*	*
1900.0625	-13	*	*
2280.0750	-13	*	*
2660.0875	-13	*	*
3040.1000	-13	*	*
3420.1125	-13	*	*
3800.1250	-13	*	*

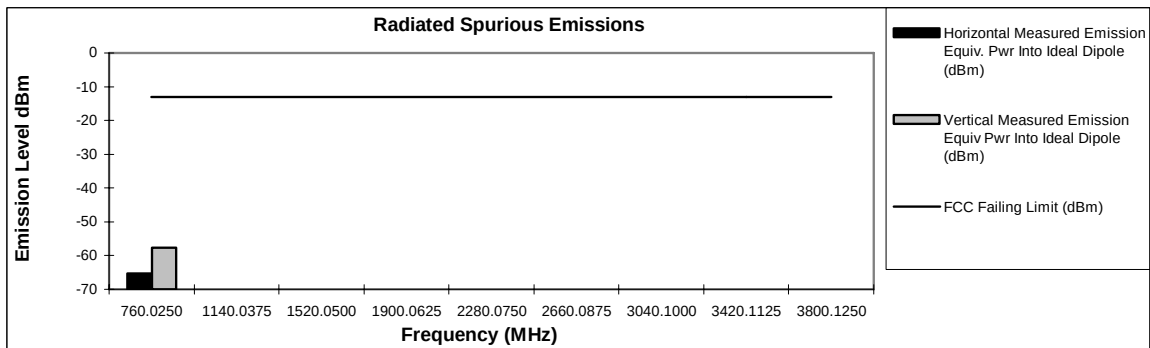


Graph 6G-16: Lo-Power, 380.0125 MHz, 25 kHz Channel Spacing, Secure

Tx Power: 0.25 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-70.13	*
1275.0375	-13	*	-67.22
1700.0500	-13	*	*
2125.0625	-13	*	*
2550.0750	-13	*	*
2975.0875	-13	-64.32	*
3400.1000	-13	*	*
3825.1125	-13	*	*
4250.1250	-13	*	*

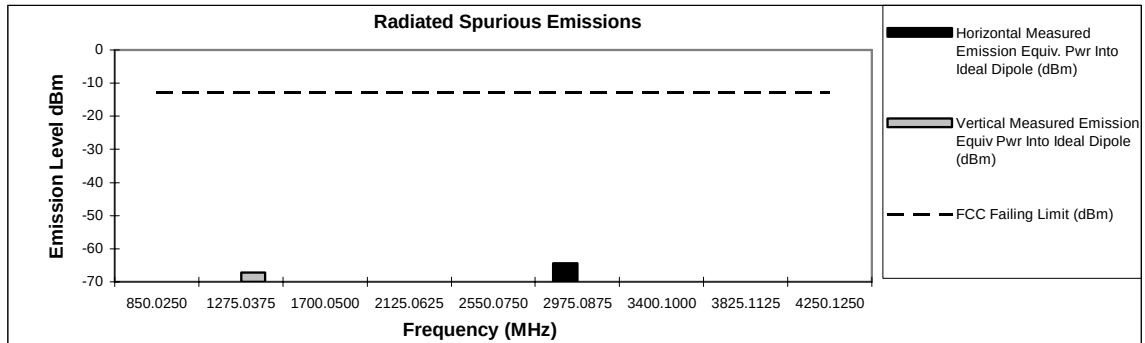

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G-17: Lo-Power, 425.0125 MHz, 25 kHz Channel Spacing, Secure

Tx Power: 0.25 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TH6FM04D Secure

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	-68.66	-56.13
1409.9625	-13	*	*
1879.9500	-13	*	*
2349.9375	-13	-68.29	-64.15
2819.9250	-13	-65.88	*
3289.9125	-13	-60.66	-58.88
3759.9000	-13	*	*
4229.8875	-13	-62.92	*
4699.8750	-13	*	*

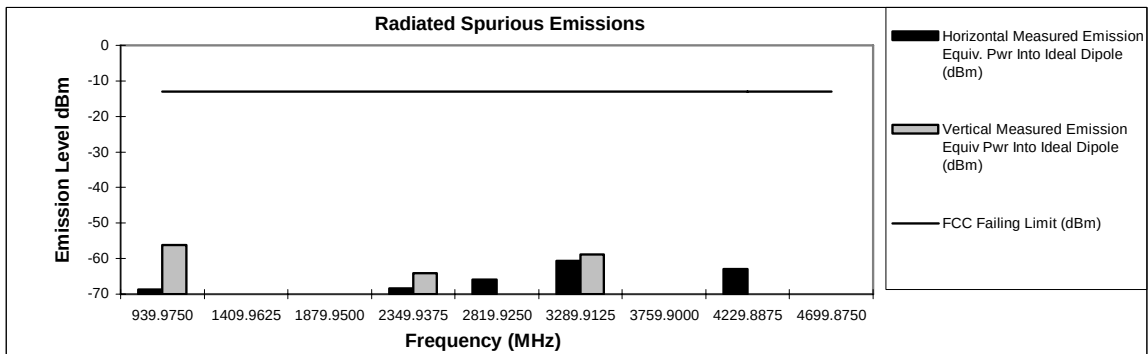**Graph 6G-18:** Lo-Power, 469.9875 MHz, 25 kHz Channel Spacing, Secure