

EXHIBIT 6
INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A – RF Power Output (Table)

EXHIBIT 6B – Audio Frequency Response (2 Graphs)

- 6B-1 –12.5 kHz Channel Spacing
- 6B-2 –25 kHz Channel Spacing

EXHIBIT 6C – Audio Low Pass Filter Response (2 Graphs)

- 6C-1 –12.5 kHz Channel Spacing
- 6C-2 –25 kHz Channel Spacing

EXHIBIT 6D – Modulation Limiting (6 Graphs)

- 6D-1 –12.5 kHz Channel Spacing, Carrier Squelch (CSQ) Mode
- 6D-2 –12.5 kHz Channel Spacing, Tone Private Line (TPL) Mode
- 6D-3 –12.5 kHz Channel Spacing, Digital Private Line (DPL) Mode
- 6D-4 –25 kHz Channel Spacing, Carrier Squelch (CSQ) Mode
- 6D-5 –25 kHz Channel Spacing, Tone Private Line (TPL) Mode
- 6D-6 –25 kHz Channel Spacing, Digital Private Line (DPL) Mode

EXHIBIT 6E – Occupied Bandwidth (8 Spectrum Analyzer Plots)

- 6E-1 –12.5 kHz Channel Spacing, 2500 Hz Audio Modulation Only
- 6E-2 –12.5 kHz Channel Spacing, 2500 Hz Audio and PL Tone Modulation
- 6E-3 –12.5 kHz Channel Spacing, 2500 Hz Audio and DPL Tone Modulation
- 6E-4 –25 kHz Channel Spacing, 2500 Hz Audio Modulation Only
- 6E-5 –25 kHz Channel Spacing, 2500 Hz Audio and PL Tone Modulation
- 6E-6 –25 kHz Channel Spacing, 2500 Hz Audio and DPL Tone Modulation
- 6E-7 -12.5 kHz Channel Spacing, APCO25 Digital Data (8K10F1D)
- 6E-8 -12.5 kHz Channel Spacing, APCO25 Digital Voice (8K10F1E)

EXHIBIT 6F – Conducted Spurious Emissions (12 Tables)

- 6F-1 - 1 Watts Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing
- 6F-2 - 1 Watts Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing
- 6F-3 - 1 Watts Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing
- 6F-4 – 5.9 Watts Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing
- 6F-5 – 5.9 Watts Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing
- 6F-6 – 5.9 Watts Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing
- 6F-7 - 1 Watts Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing
- 6F-8 - 1 Watts Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing
- 6F-9 - 1 Watts Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing
- 6F-10 – 5.9 Watts Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing
- 6F-11 – 5.9 Watts Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing
- 6F-12 – 5.9 Watts Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

EXHIBIT 6G – Radiated Spurious Emissions (12 Graphs)

- 6G-1 – 5.9 Watts, 380.0125 MHz, 12.5 kHz Channel Spacing
- 6G-2 – 5.9 Watts, 425.0125 MHz, 12.5 kHz Channel Spacing
- 6G-3 – 5.9 Watts, 469.9875 MHz, 12.5 kHz Channel Spacing
- 6G-4 – 5.9 Watts, 380.0125 MHz, 25 kHz Channel Spacing
- 6G-5 - 5.9 Watts, 425.0125 MHz, 25 kHz Channel Spacing
- 6G-6 – 5.9 Watts, 469.9875 MHz, 25 kHz Channel Spacing
- 6G-7 - 2 Watts, 380.0125 MHz, 12.5 kHz Channel Spacing
- 6G-8 - 2 Watts, 425.0125 MHz, 12.5 kHz Channel Spacing

6G-9 - 2 Watts, 469.9875 MHz, 12.5 kHz Channel Spacing
6G-10 - 2 Watts, 380.0125 MHz, 25 kHz Channel Spacing
6G-11 - 2 Watts, 425.0125 MHz, 25 kHz Channel Spacing
6G-12 - 2 Watts, 469.9875 MHz, 25 kHz Channel Spacing

EXHIBIT 6H – Frequency Stability (2 Graphs)

6H-1 – Frequency Stability vs. Temperature
6H-2 – Frequency Stability vs. Voltage

EXHIBIT 6I – Transient Frequency Behavior (8 Graphs)

6I-1 – 5.9 Watts, 12.5 kHz Key-Up Attack Time
6I-2 – 5.9 Watts, 12.5 kHz De-Key Decay Time
6I-3 – 5.9 Watts, 25 kHz Key-Up Attack Time
6I-4 – 5.9 Watts, 25 kHz De-Key Decay Time
6I-5 – 2 Watts, 12.5 kHz Key-Up Attack Time
6I-6 – 2 Watts, 12.5 kHz De-Key Decay Time
6I-7 – 2 Watts, 25 kHz Key-Up Attack Time
6I-8 – 2 Watts, 25 kHz De-Key Decay Time

EXHIBIT 6A**RF Conducted Power Output Data** -- Pursuant 47 CFR 2.1046(a), 2.1033(c)(6), 2.1033(c)(7) and 2.1033(c)(8)

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q101).

At maximum output power setting, Frequency 380.0125 MHz:

Output RF power	5.80 Watts
DC Voltage	7.50 Volts
DC Current	2.26 Amps
DC Input Power	16.95 Watts

At minimum output power setting, Frequency 380.0125 MHz:

Output RF power	1.08 Watts
DC Voltage	7.50 Volts
DC Current	1.04 Amps
DC Input Power	7.80 Watts

At maximum output power setting, Frequency 425.0125 MHz:

Output RF power	5.90 Watts
DC Voltage	7.50 Volts
DC Current	2.27 Amps
DC Input Power	17.03 Watts

At minimum output power setting, Frequency 425.0125 MHz:

Output RF power	1.04 Watts
DC Voltage	7.50 Volts
DC Current	0.91 Amps
DC Input Power	6.83 Watts

At maximum output power setting, Frequency 469.9875 MHz:

Output RF power	5.90 Watts
DC Voltage	7.50 Volts
DC Current	2.37 Amps
DC Input Power	17.78 Watts

At minimum output power setting, Frequency 469.9875 MHz:

Output RF power	1.04 Watts
DC Voltage	7.50 Volts
DC Current	0.96 Amps
DC Input Power	7.20 Watts

EXHIBIT 6B

Transmit Audio Response - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)



Figure 6B-1: 12.5 kHz Channel Spacing, 425.0125 MHz, Transmit Audio Frequency Response

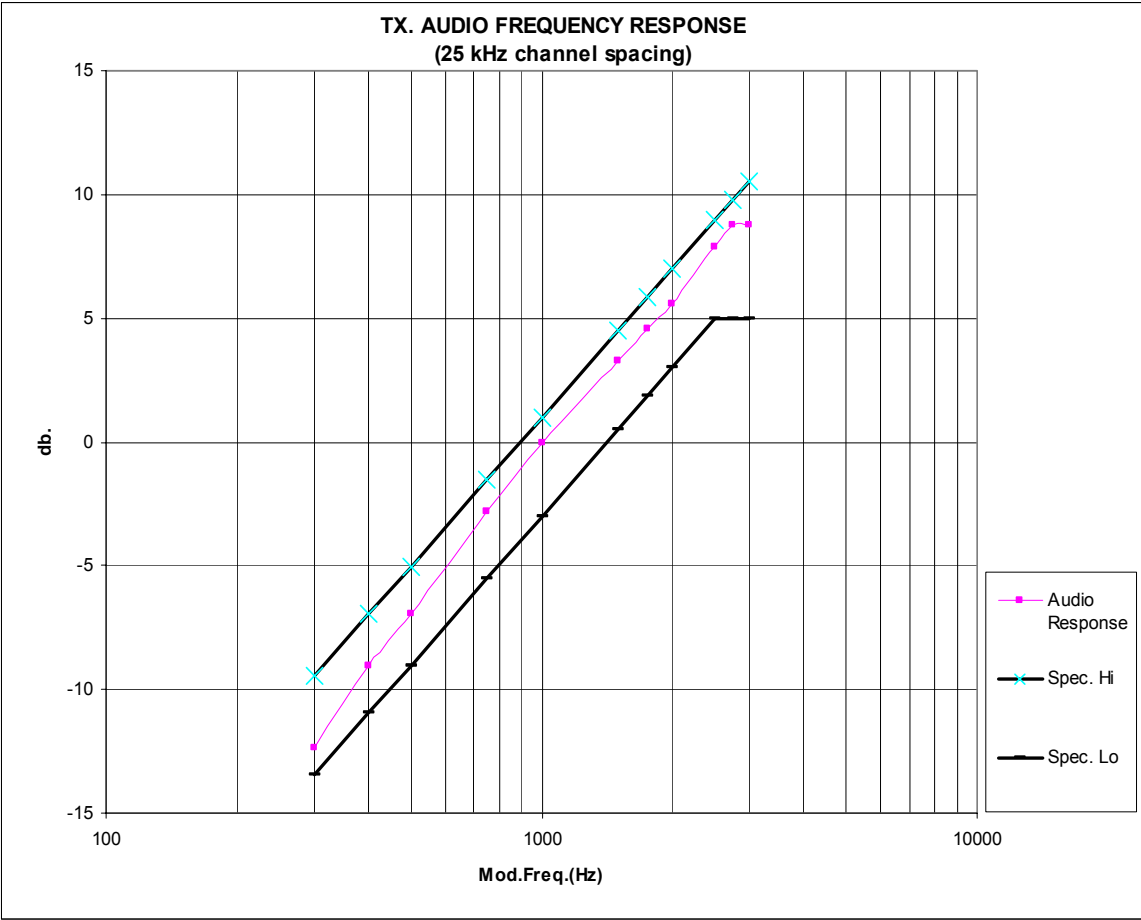


Figure 6B-2: 25 kHz Channel Spacing, 425.0125 MHz, Transmit Audio Frequency Response

EXHIBIT 6C

Transmit Audio Post Limiter Low Pass Filter Response - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

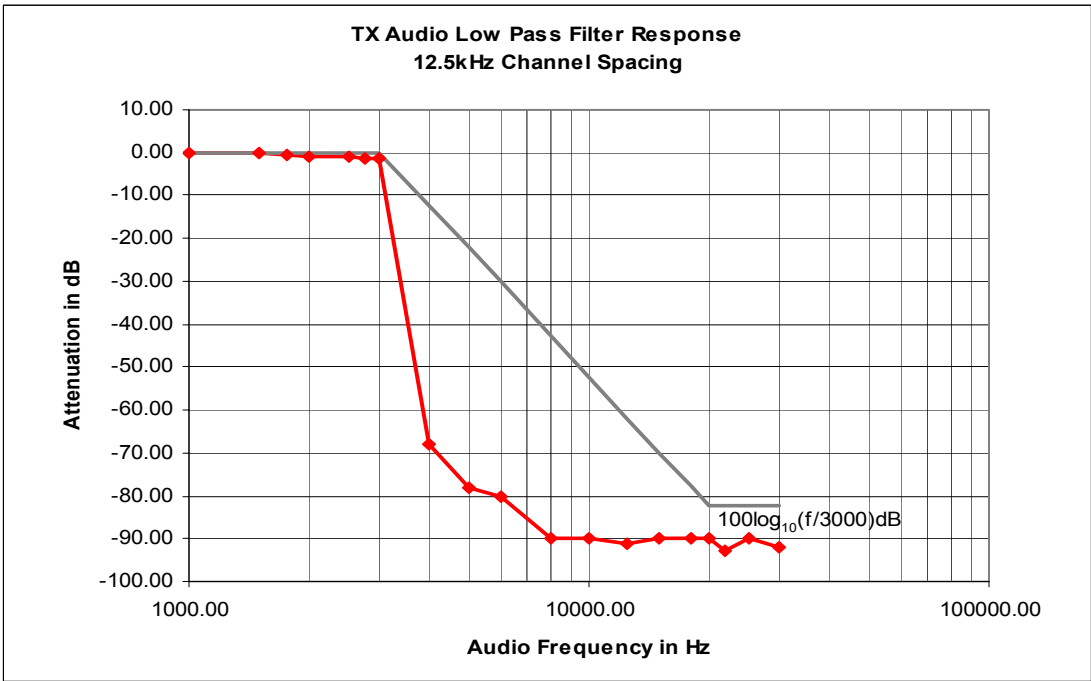


Figure 6C-1: 12.5 kHz Channel Spacing, 425.0125 MHz, Transmit Audio Low Pass Filter Response

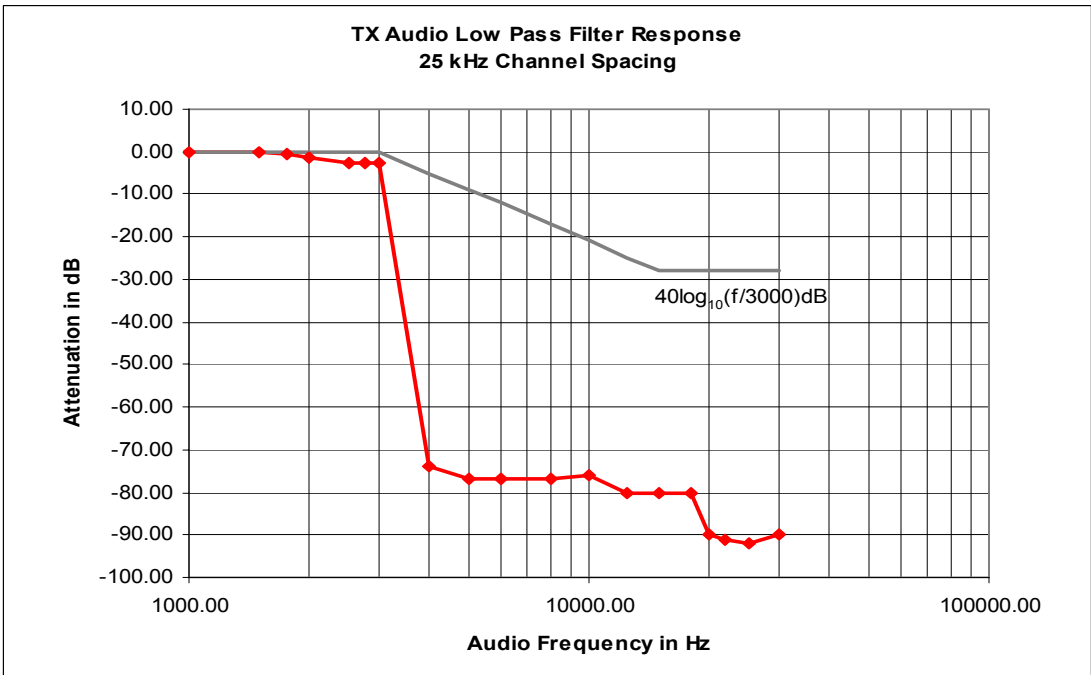


Figure 6C-2: 25 kHz Channel Spacing, 425.0125 MHz, Transmit Audio Low Pass Filter Response

EXHIBIT 6D

Modulation Limiting - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

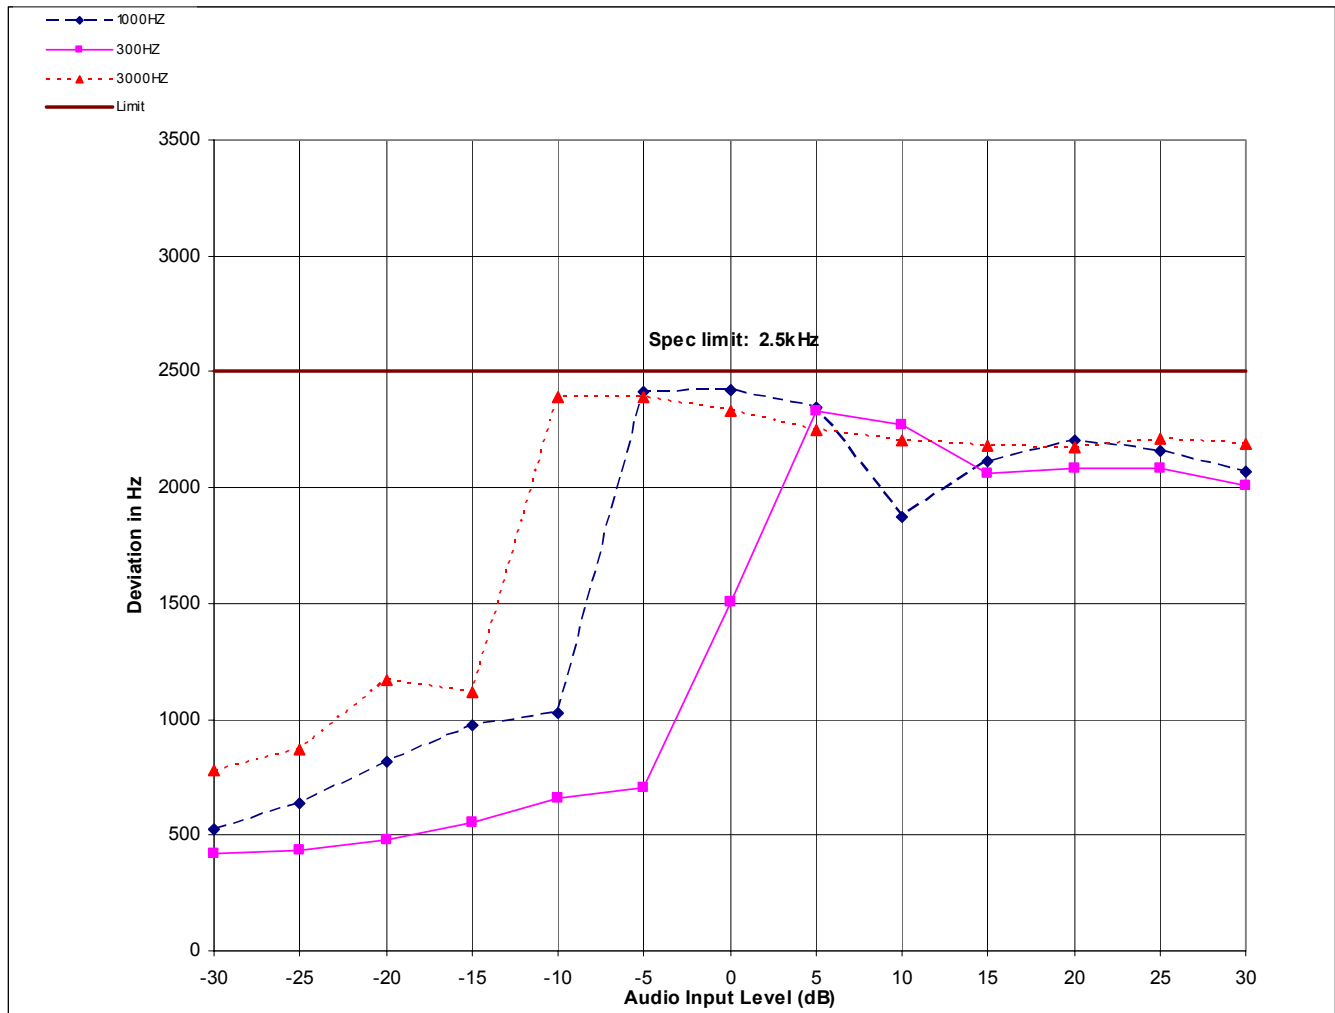


Figure 6D-1: 12.5 kHz Channel Spacing, 425.0125 MHz, Carrier Squelch (CSQ) Mode

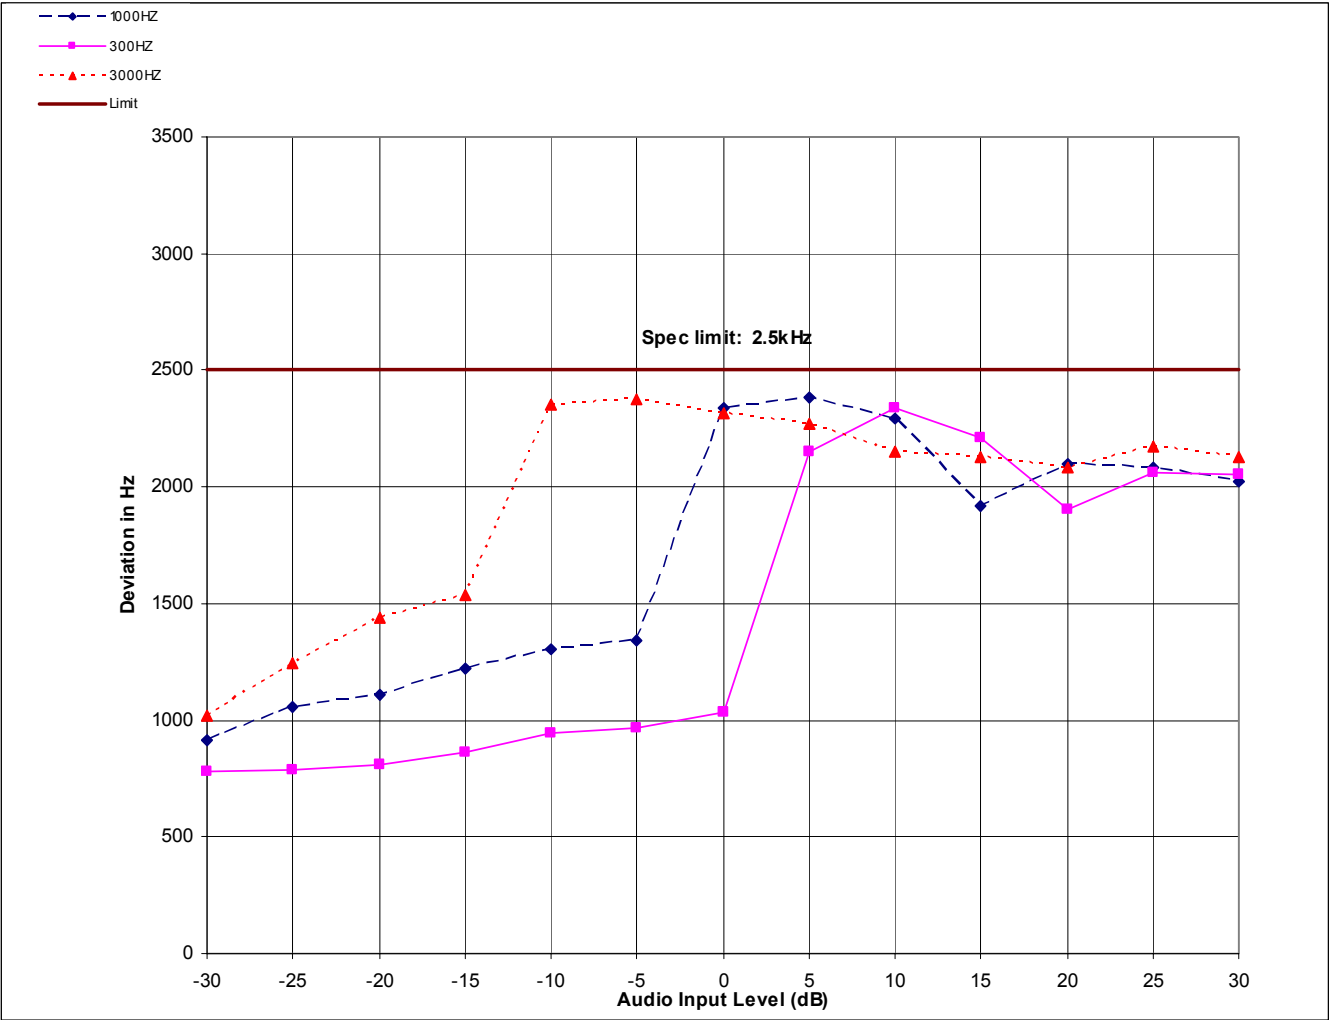


Figure 6D-2: 12.5 kHz Channel Spacing, 425.0125 MHz, Tone Private Line (TPL) Mode

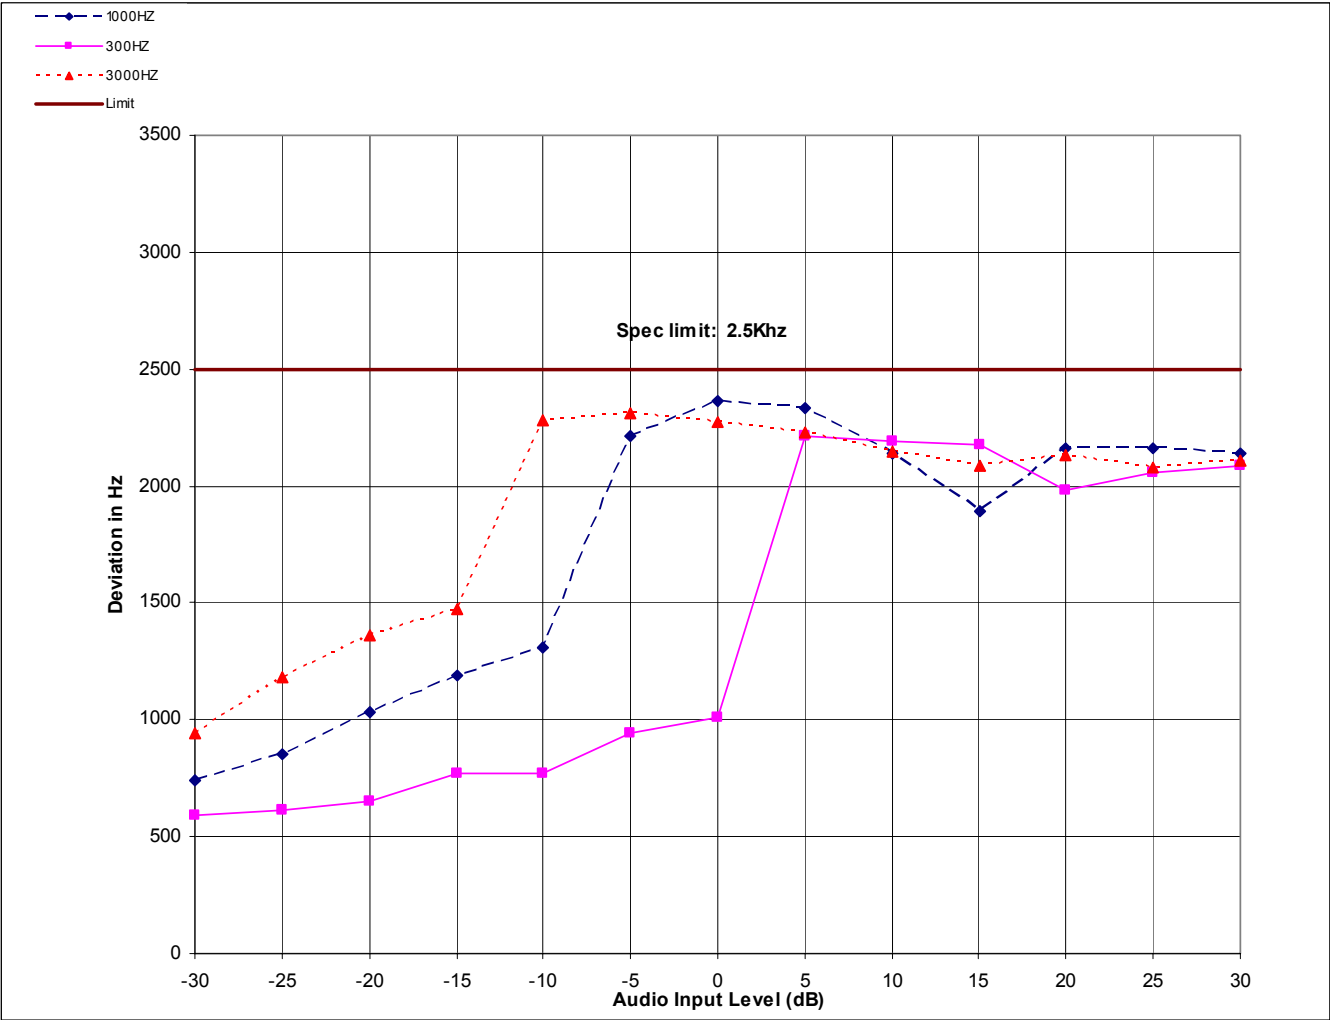


Figure 6D-3: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Private Line (DPL) Mode

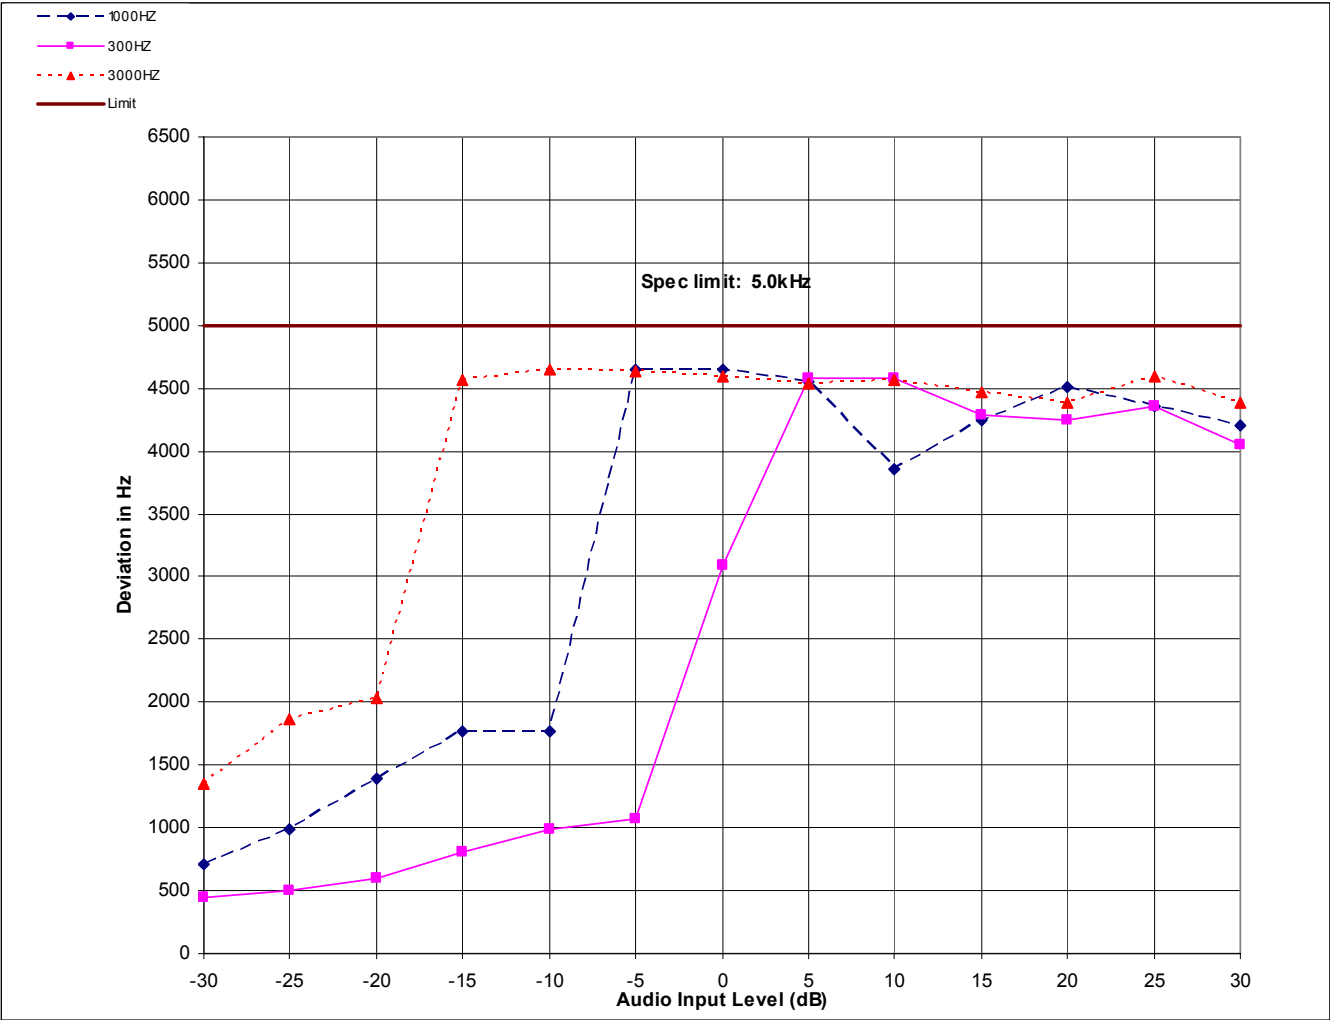


Figure 6D-4: 25 kHz Channel Spacing, 425.0125 MHz, Carrier Squelch (CSQ) Mode

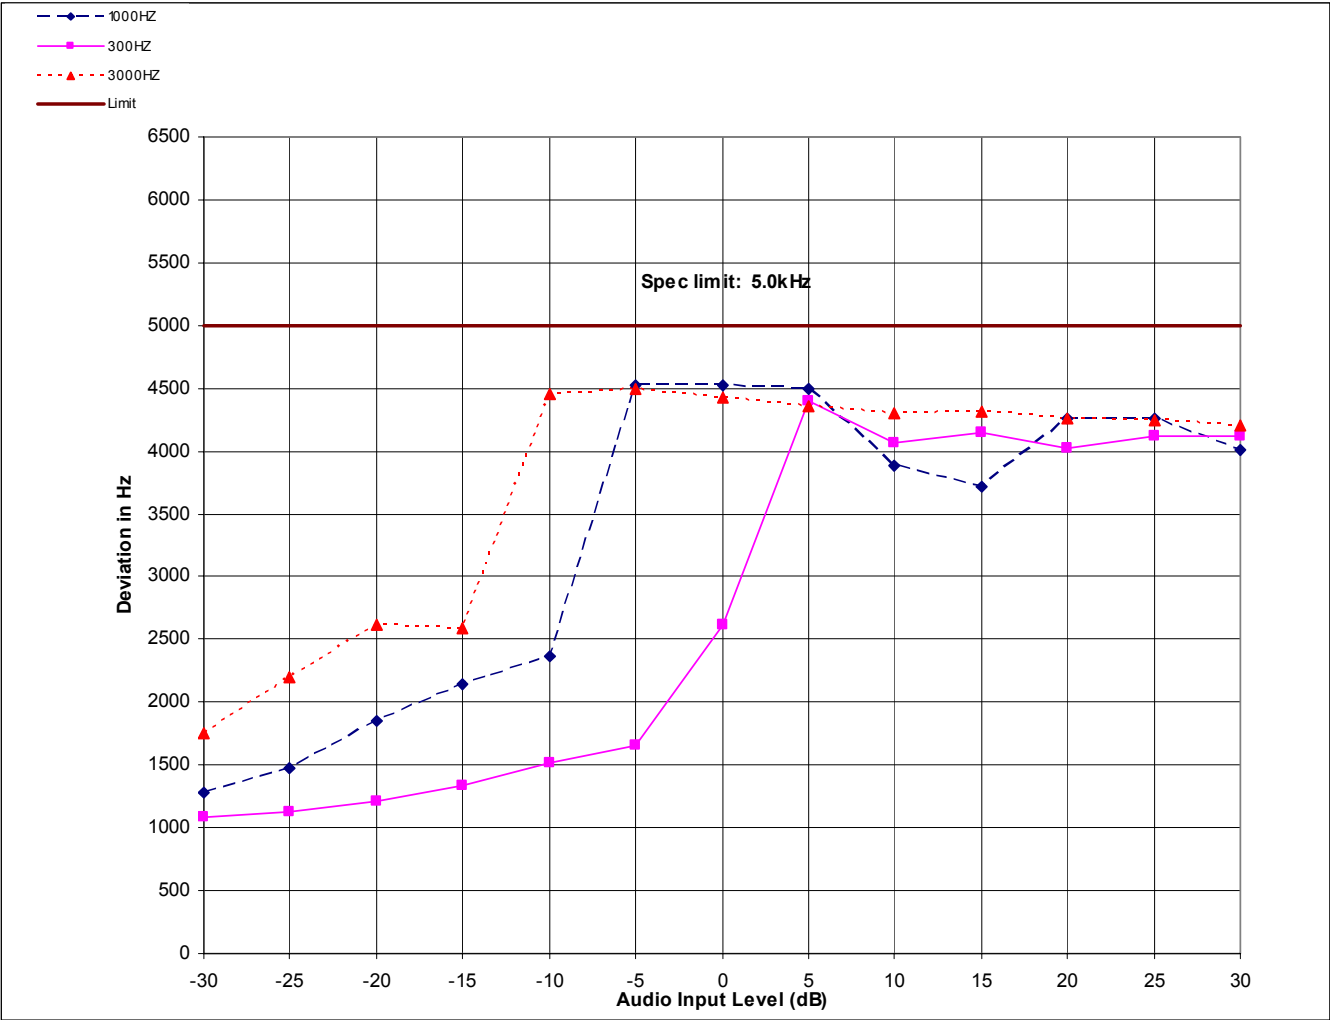


Figure 6D-5: 25 kHz Channel Spacing, 425.0125 MHz, Tone Private Line (TPL) Mode

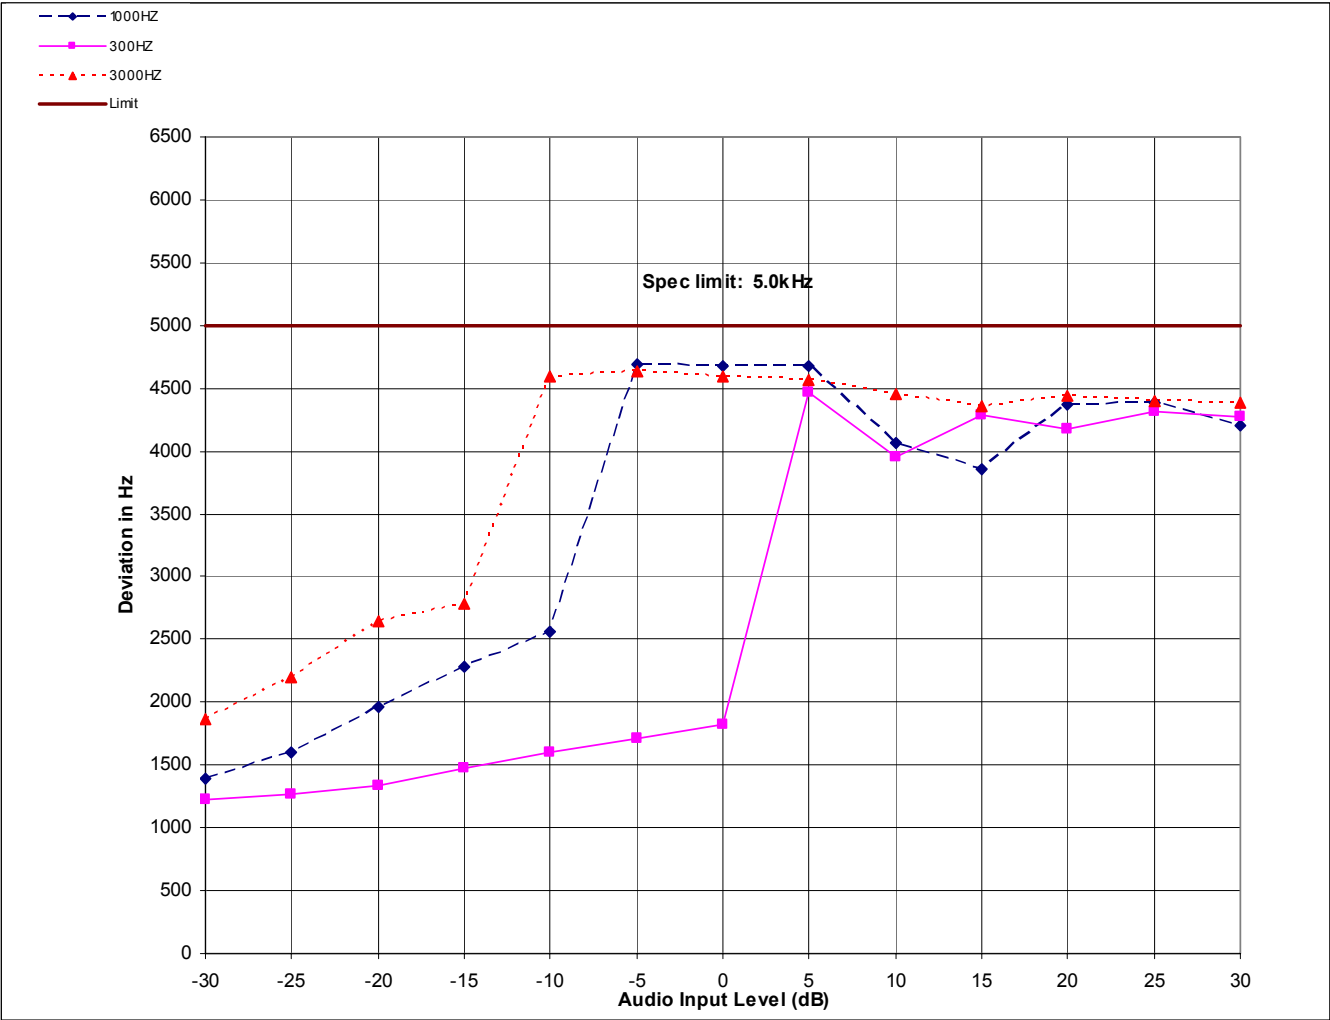


Figure 6D-6: 25 kHz Channel Spacing, 425.0125 MHz, Digital Private Line (DPL) Mode

EXHIBIT 6E

Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

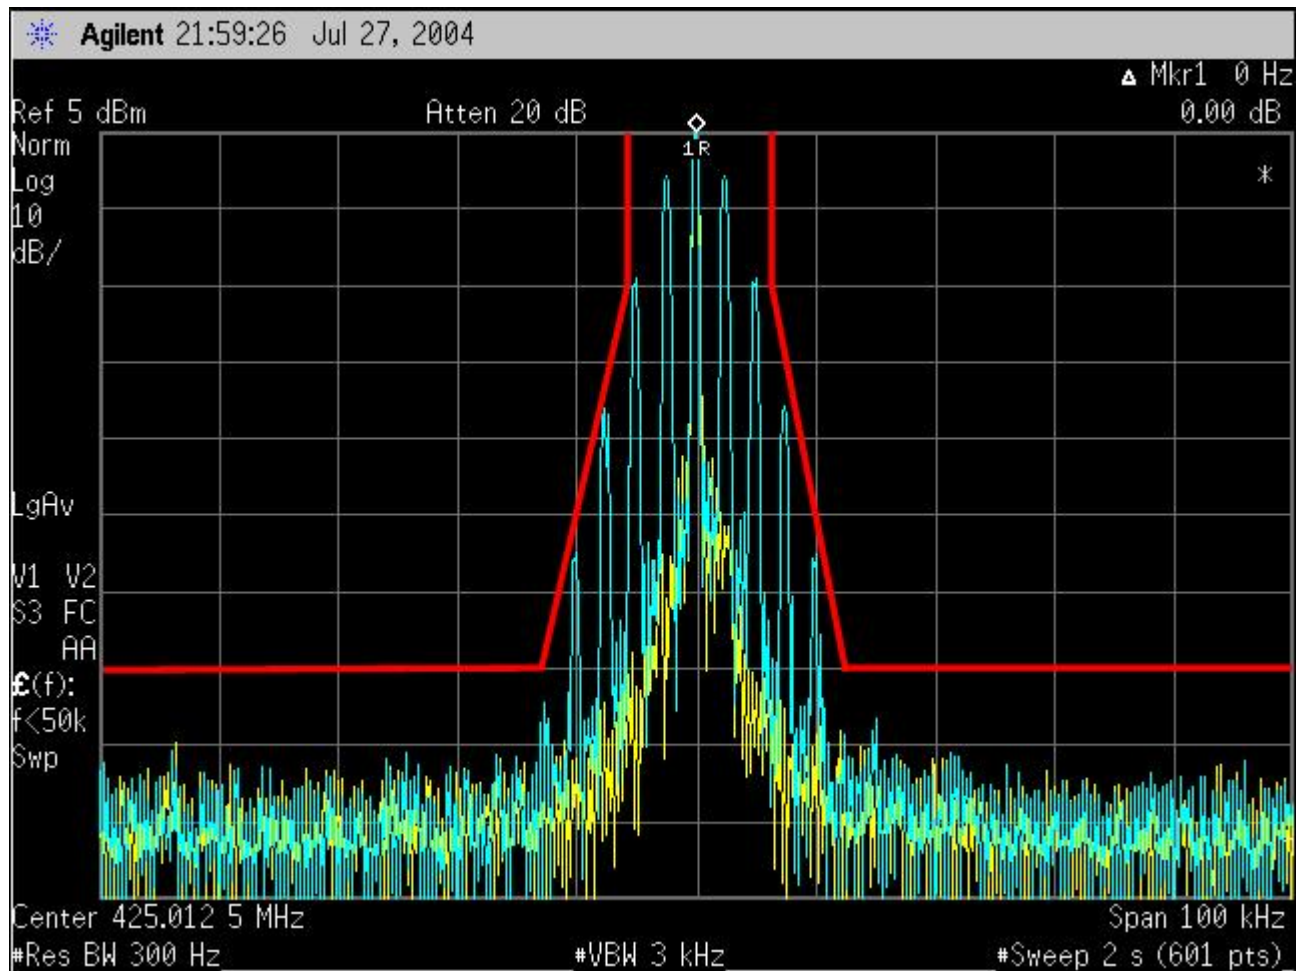


Figure 6E-1: 12.5 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio Modulation Only, Mask D

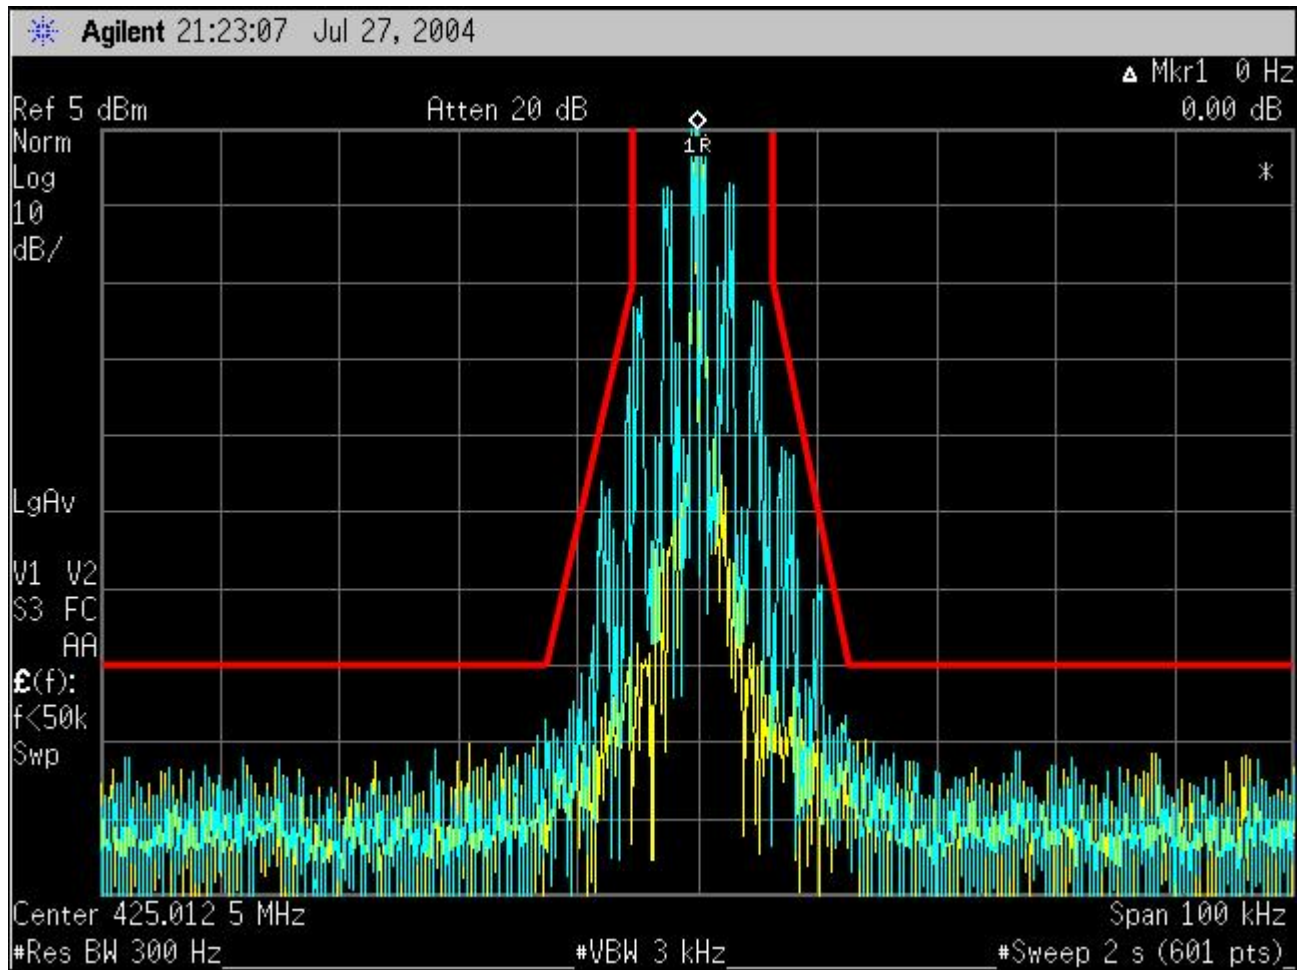


Figure 6E-2: 12.5 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio and PL Tone Modulation, Mask D

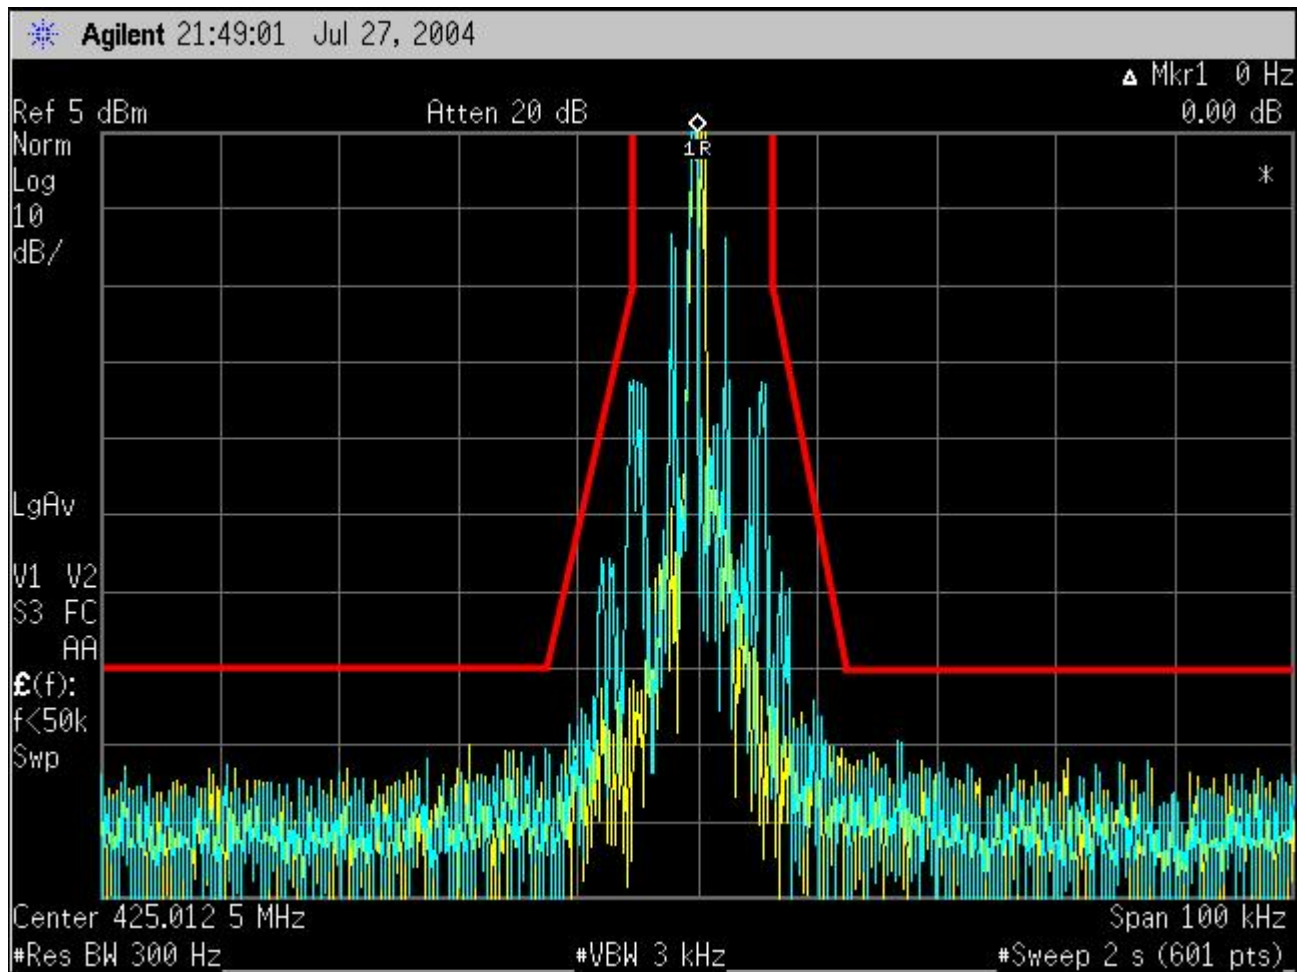


Figure 6E-3: 12.5 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio and DPL Tone Modulation, Mask D

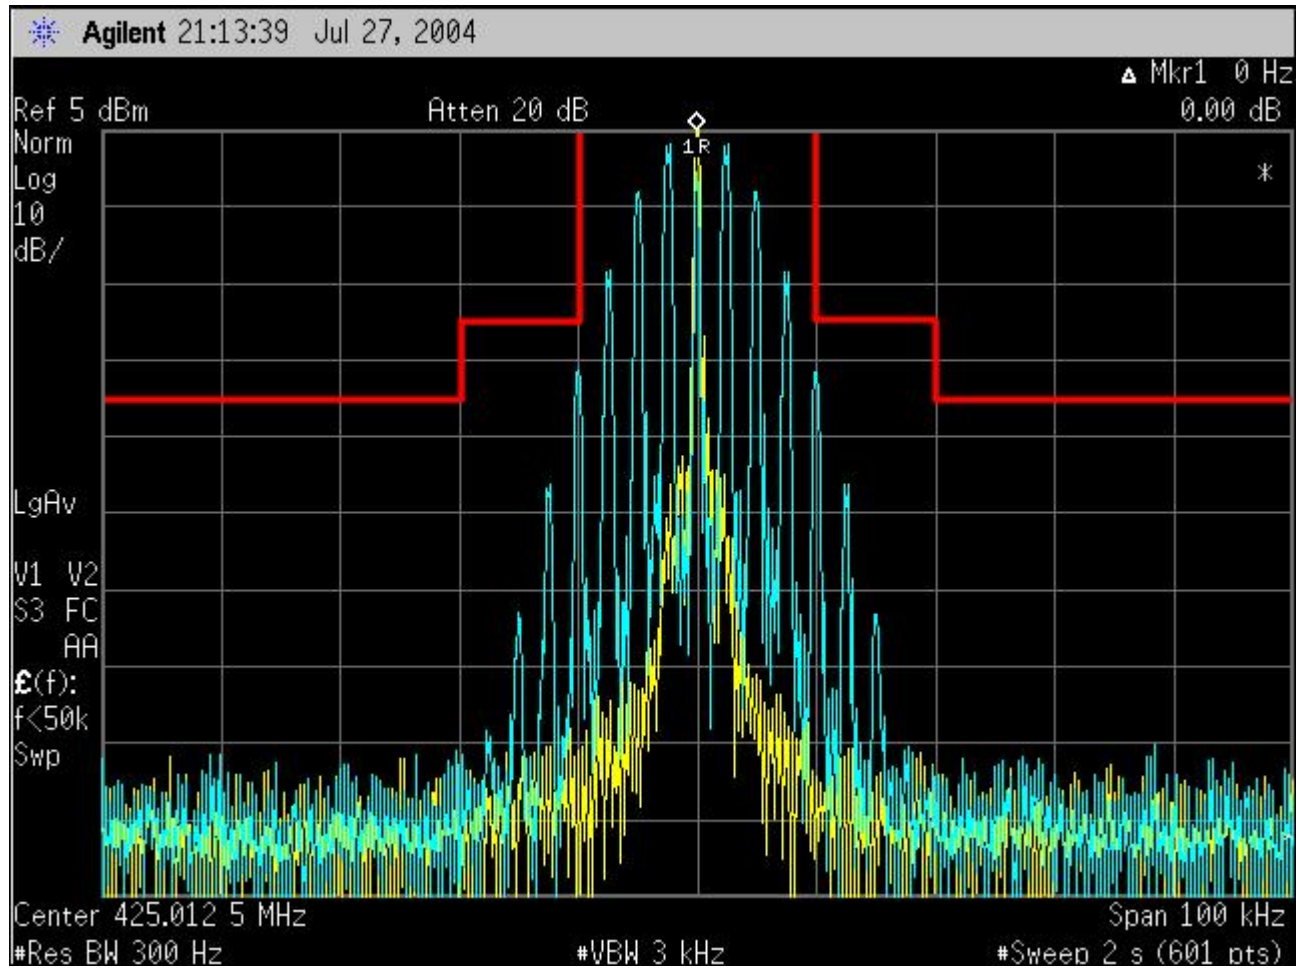


Figure 6E-4: 25 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio Modulation Only, Mask B

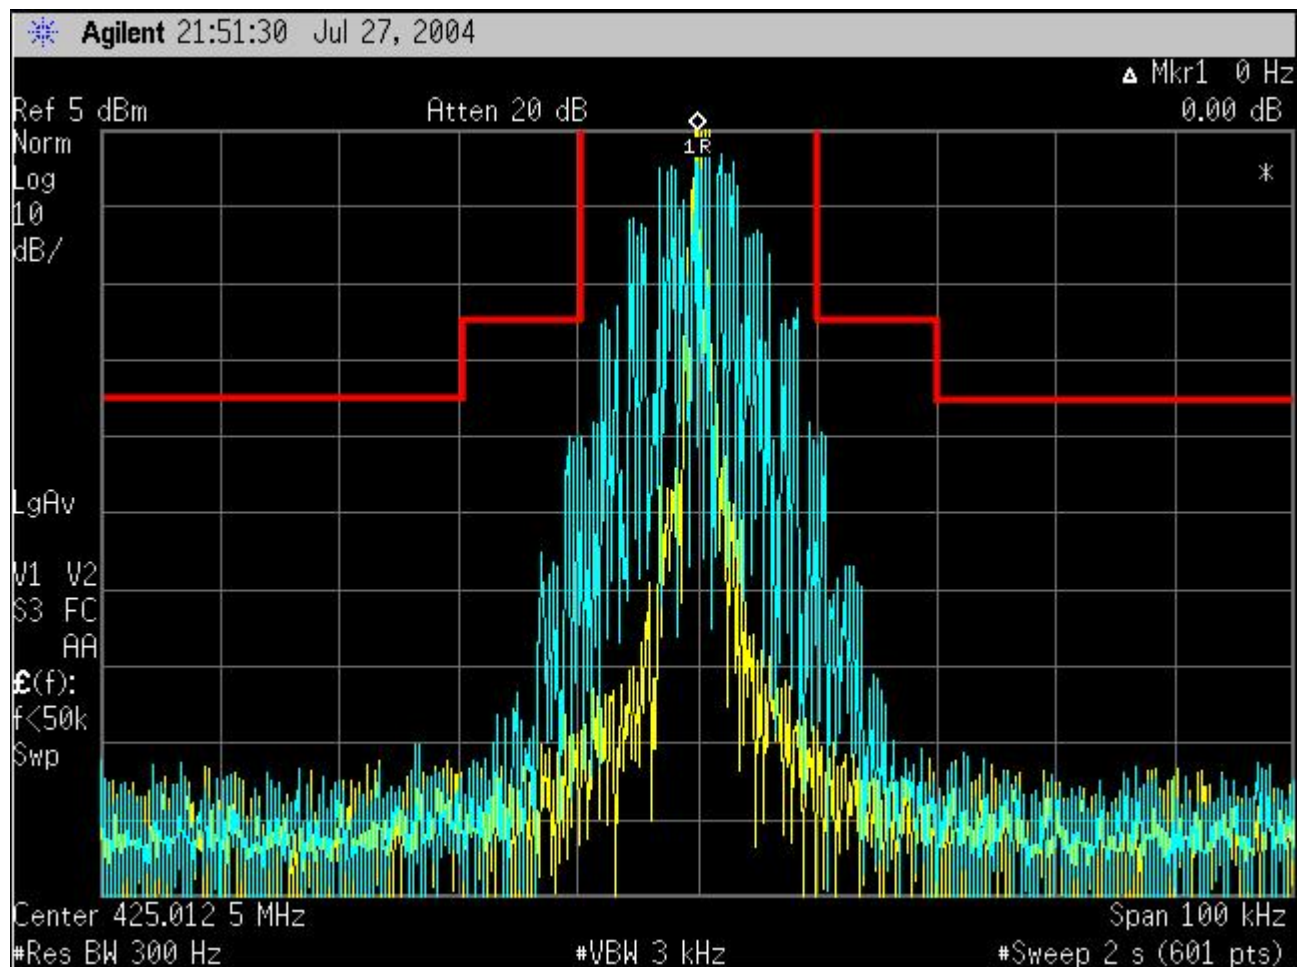


Figure 6E-5: 25 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio and PL Tone Modulation, Mask B

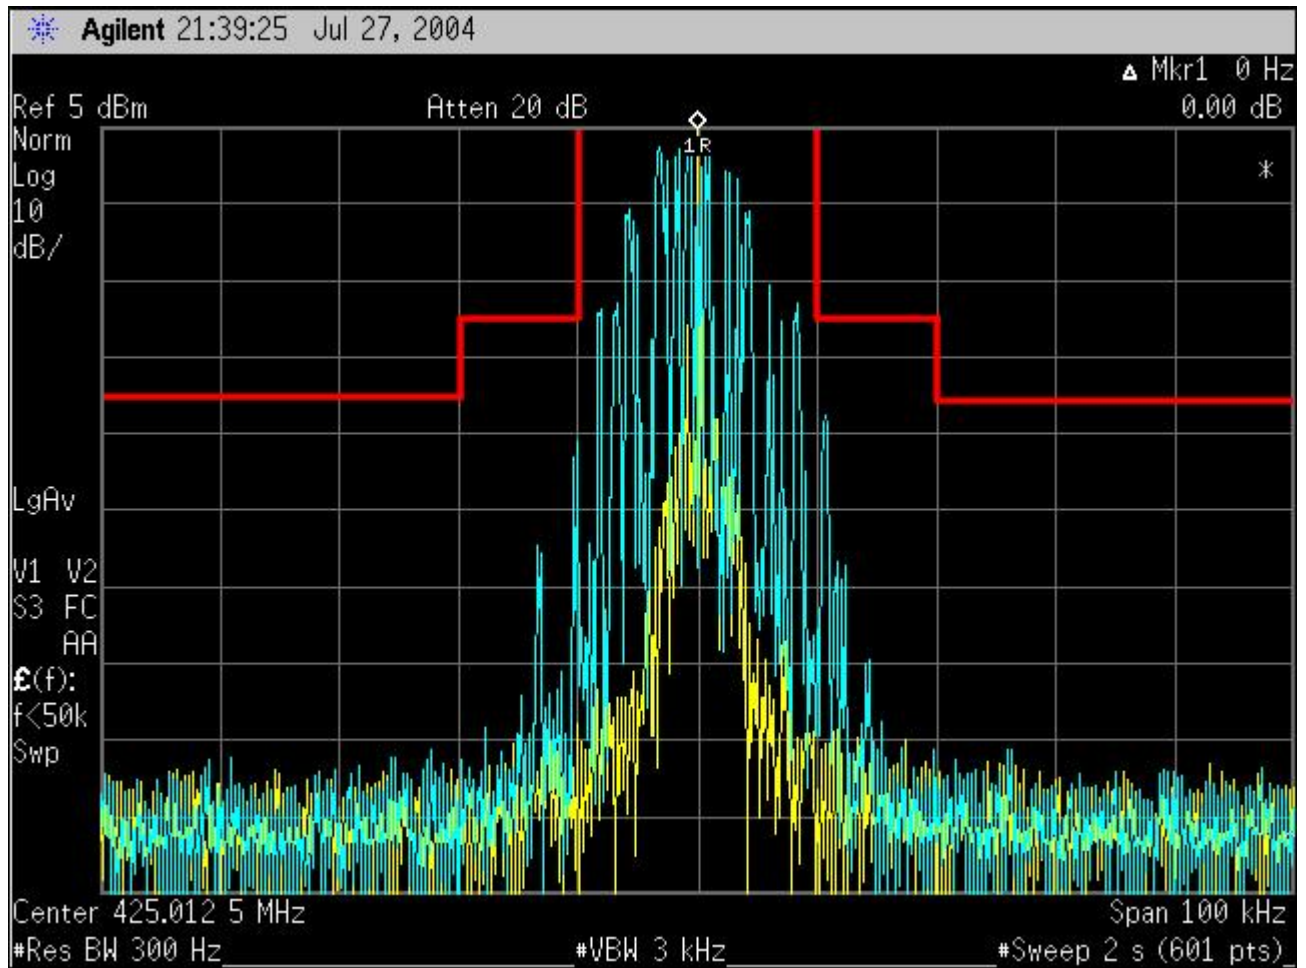


Figure 6E-6:25 kHz Channel Spacing, 425.0125 MHz, 2500 Hz Audio and DPL Tone Modulation, Mask B

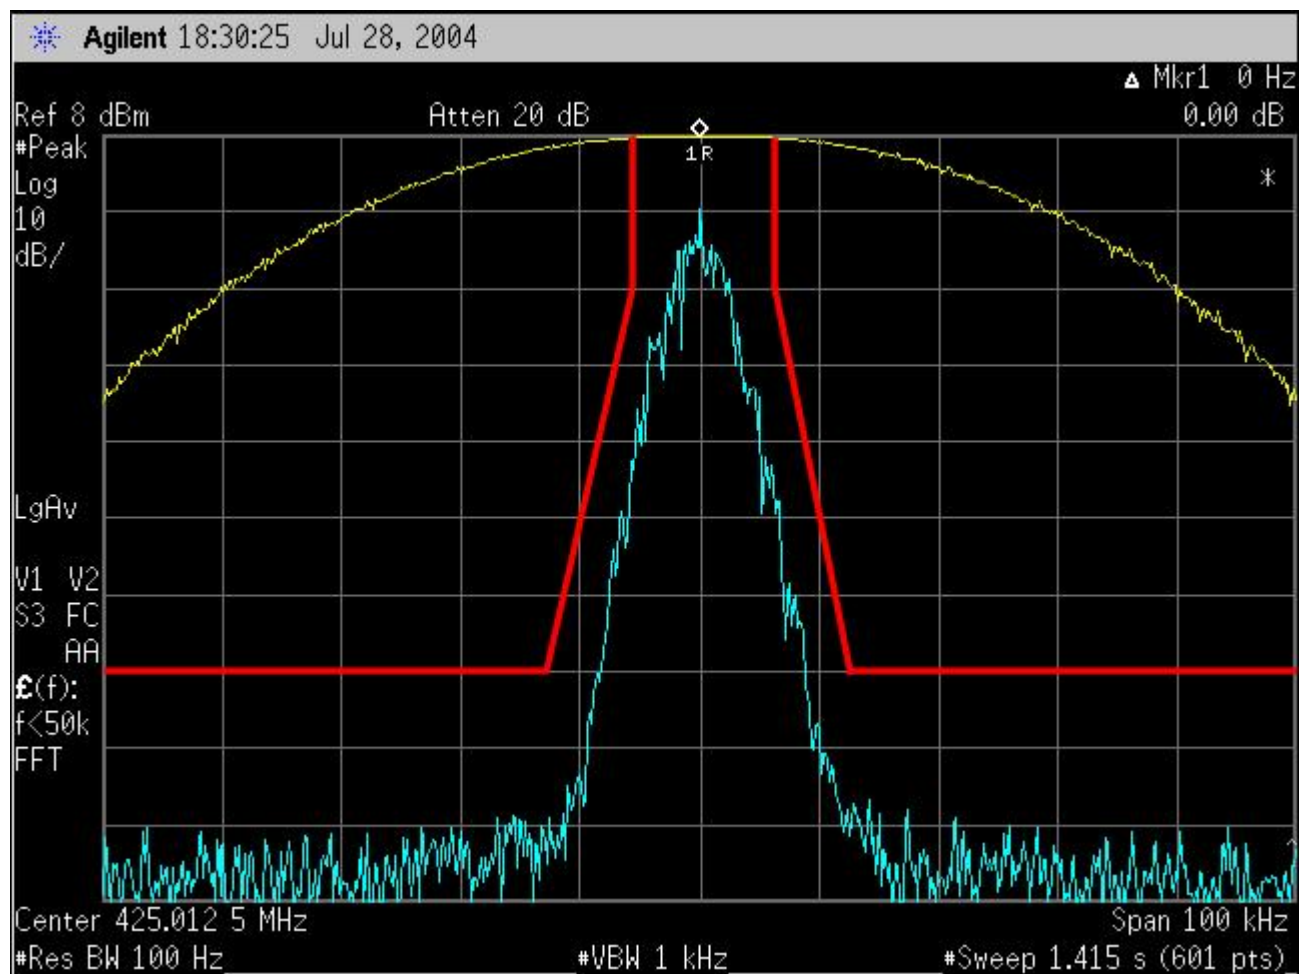


Figure 6E-7: 12.5 kHz Channel Spacing, 425.0125 MHz, APCO25 Digital Data (8K10F1D), Mask D

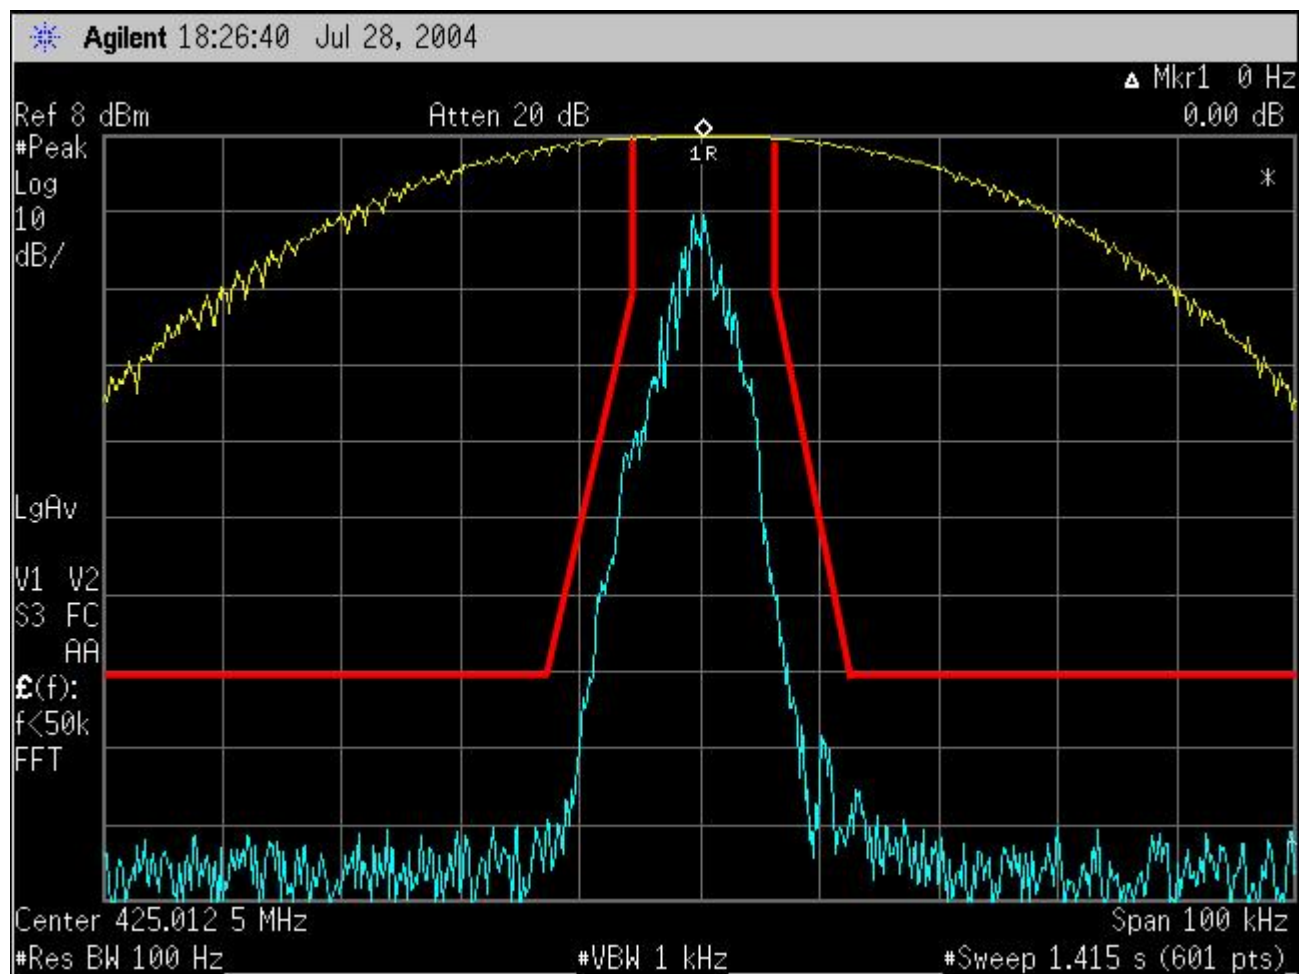


Figure 6E-8: 12.5 kHz Channel Spacing, 425.0125 MHz, APCO25 Digital Voice (8K10F1E), Mask D

EXHIBIT 6F

Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)
Note: Red lines on graphs correspond to the FCC limit of -13dBm.

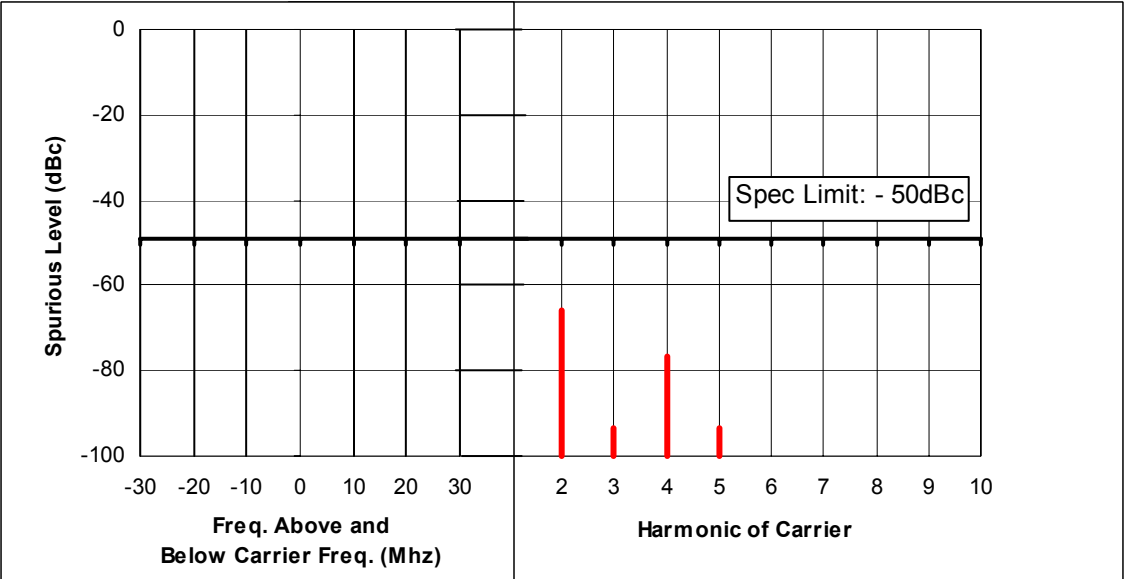


Table 6F-1: 1 Watt Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

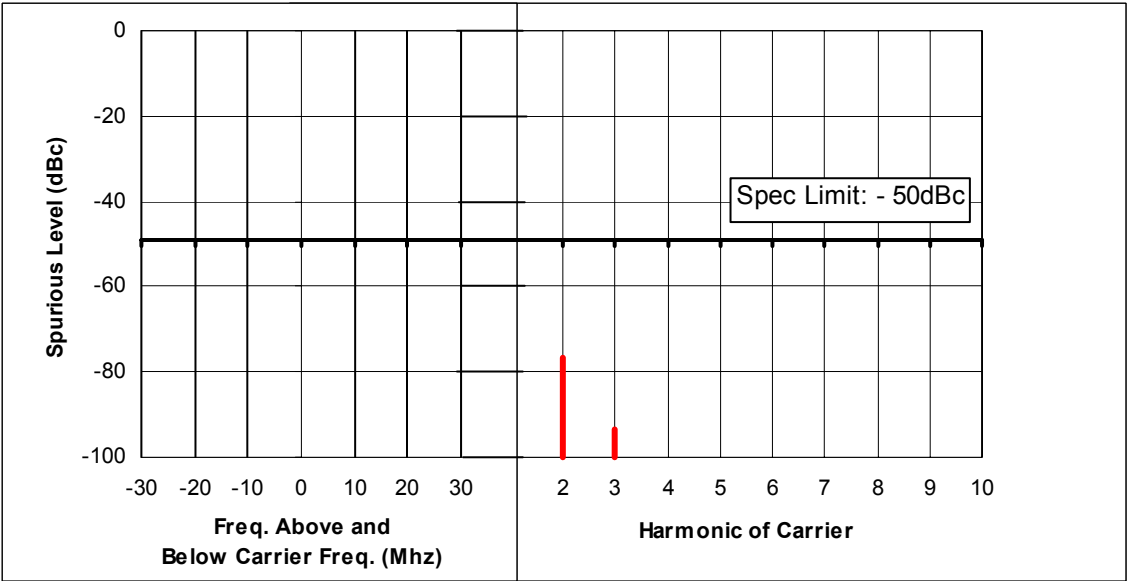


Table 6F-2: 1 Watt Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

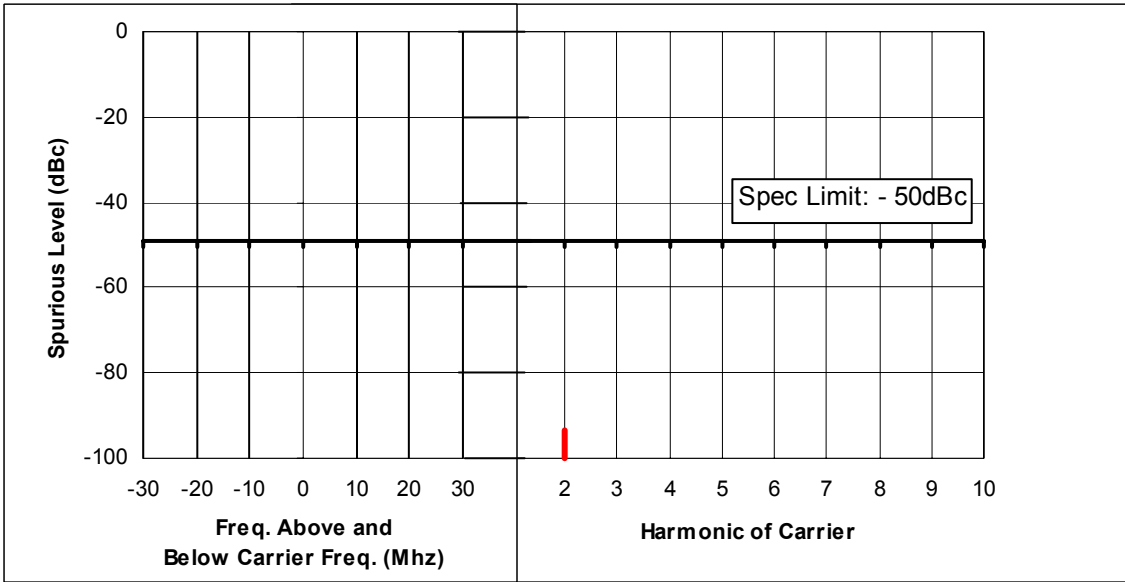


Table 6F-3: 1 Watt Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

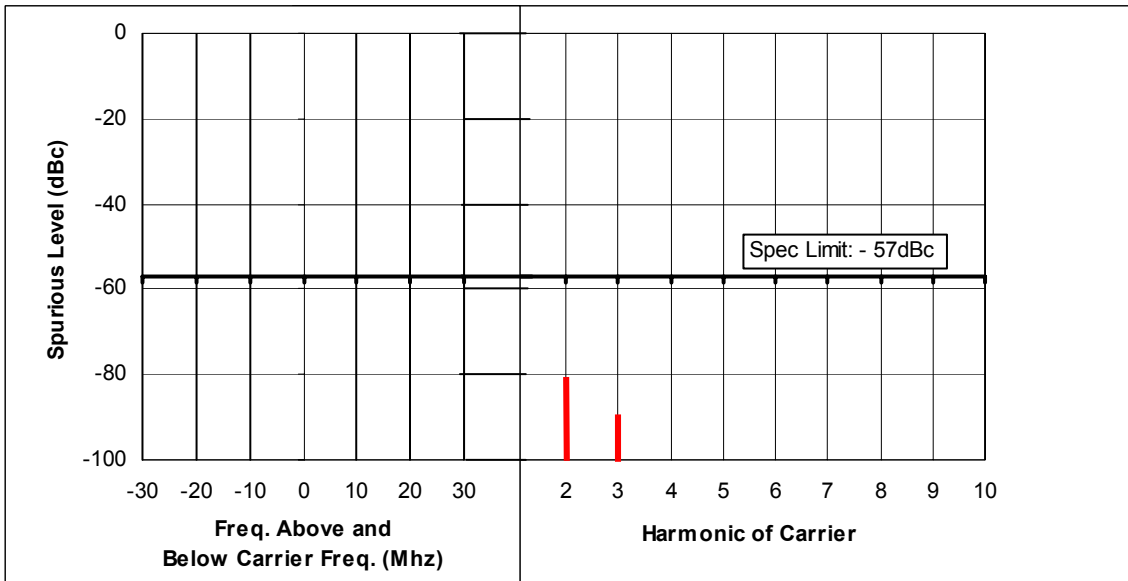


Table 6F-4: 5.9 Watt Harmonic of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

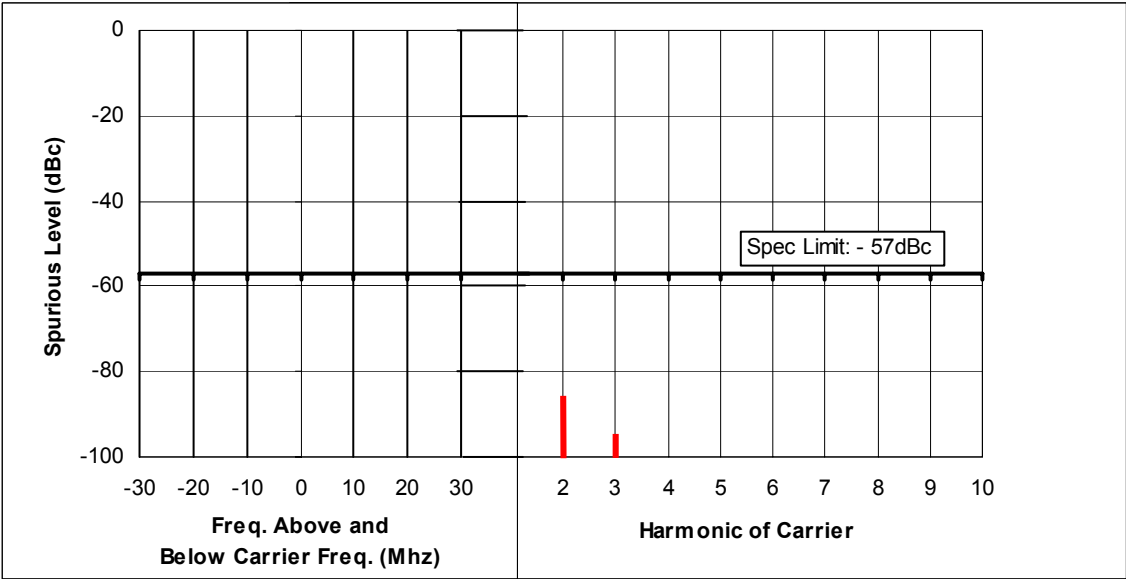


Table 6F-5: 5.9 Watt Harmonic of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

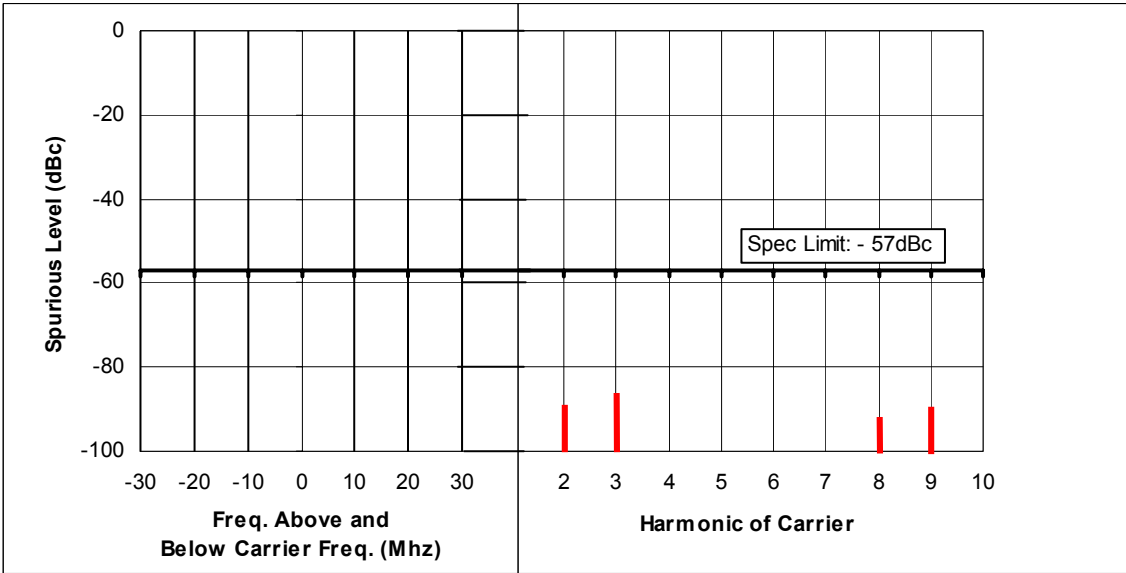


Table 6F-6: 5.9 Watt Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

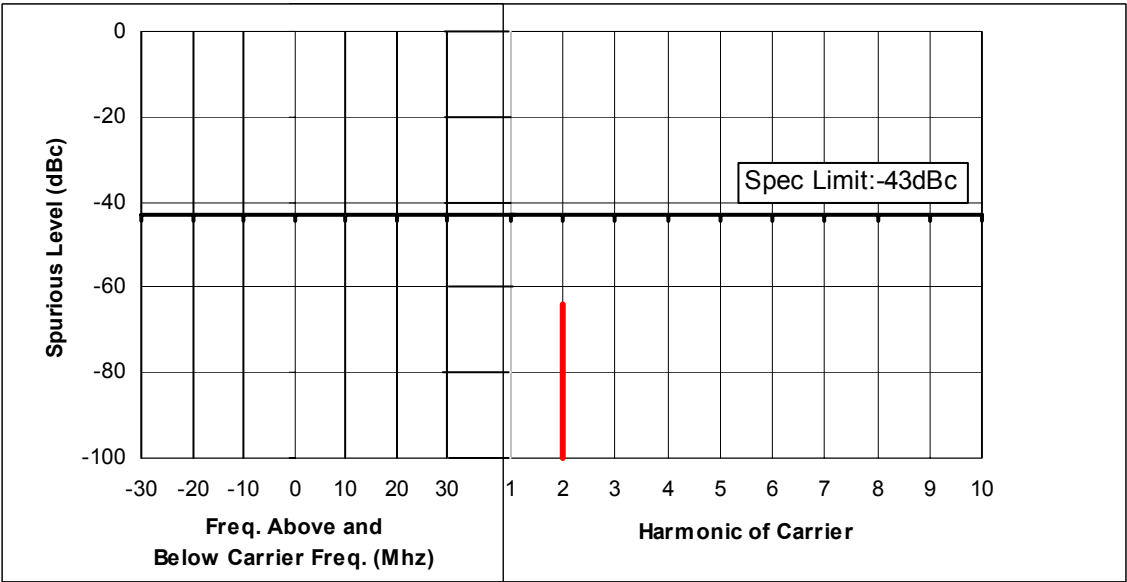


Table 6F-7: 1 Watt Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing

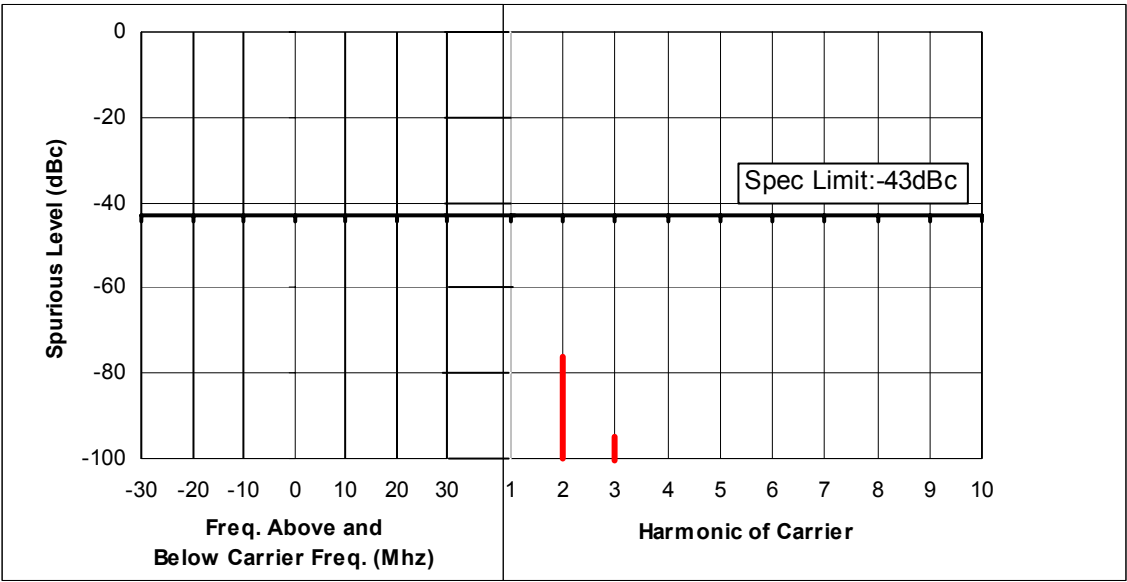


Table 6F-8: 1 Watt Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

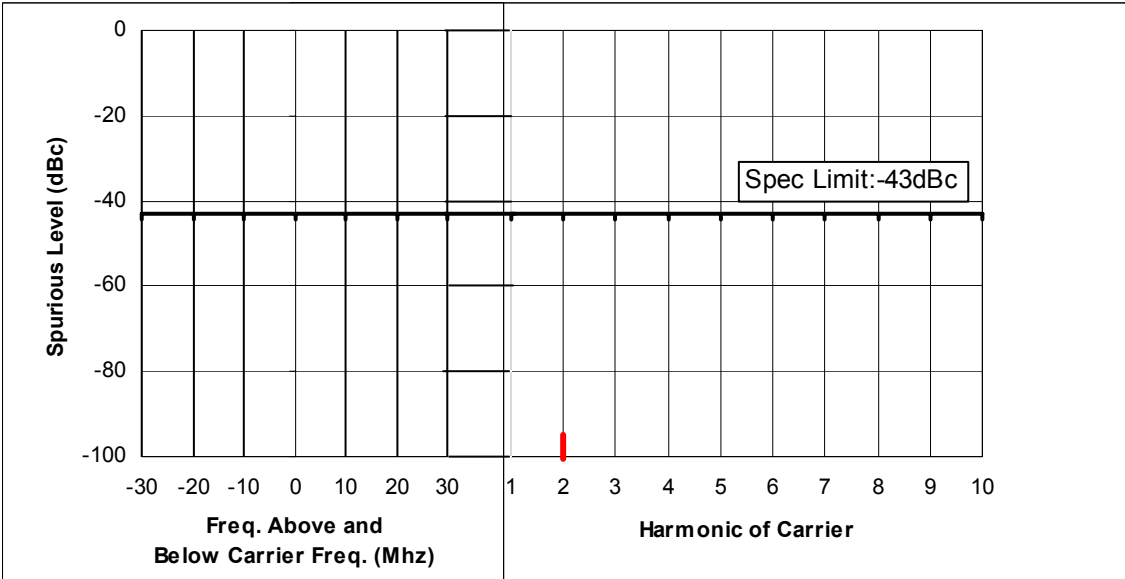


Table 6F-9: 2 Watt Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

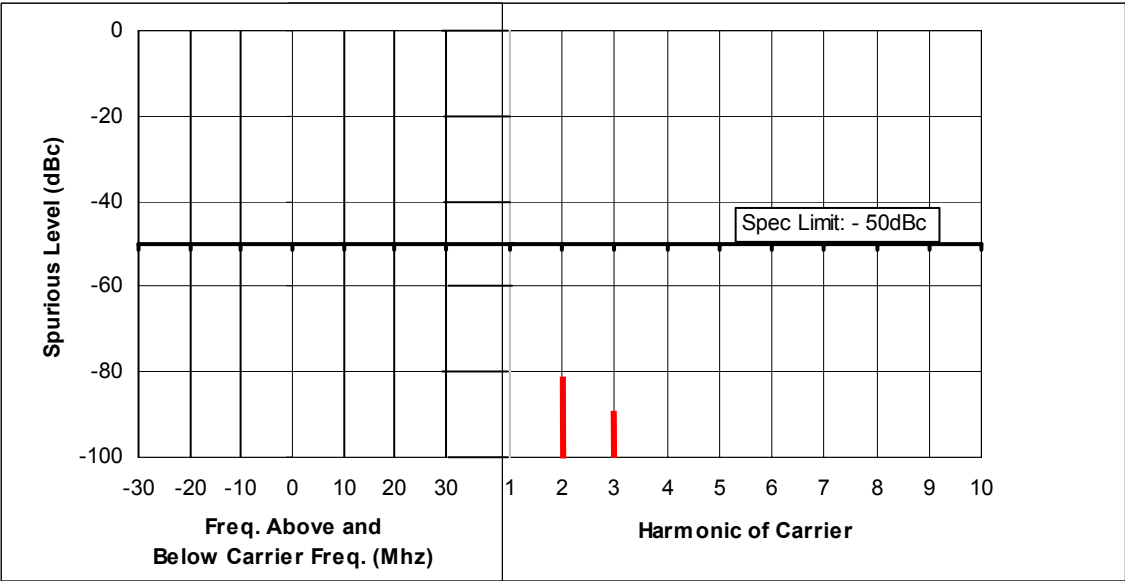


Table 6F-10: 5.9 Watt Harmonic of Carrier 380.0125 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

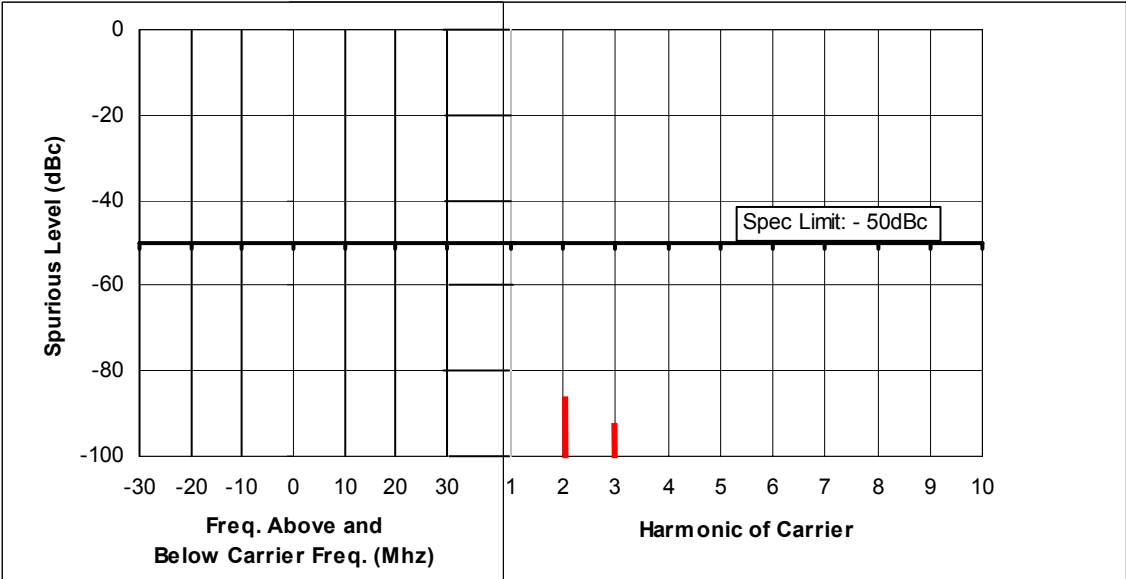


Table 6F-11: 5.9 Watt Harmonic of Carrier 425.0125 MHz, 25 kHz Channel Spacing

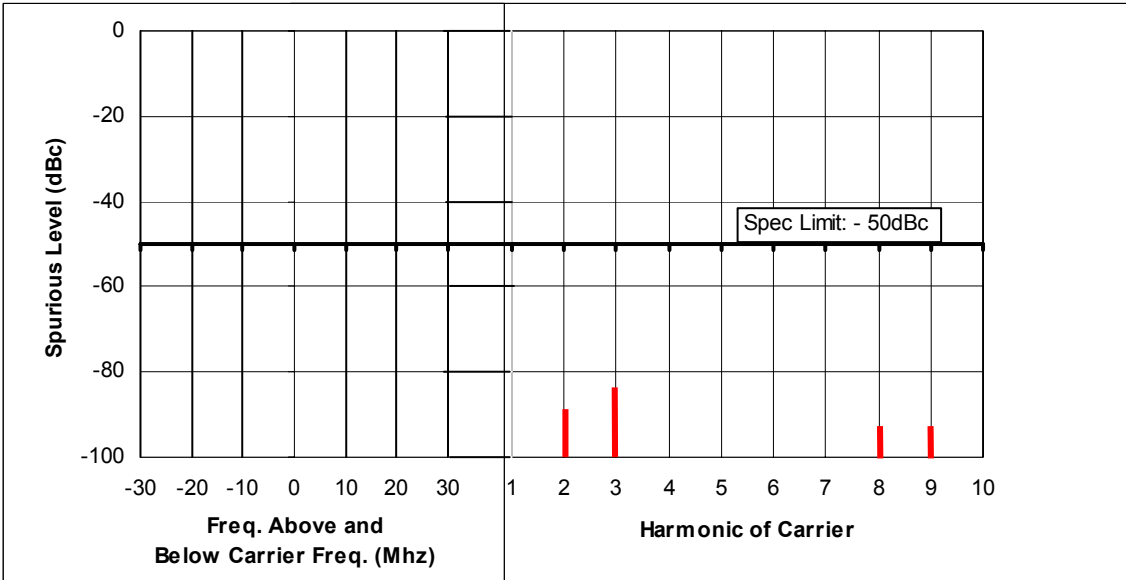


Table 6F-12: 5.9 Watt Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

EXHIBIT 6G


Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

Tx Power: 5.9 Watts

380.0125 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-20	-43.71	-46.73
1140.0375	-20	*	*
1520.0500	-20	-36.52	-41.13
1900.0625	-20	-31.31	-36.91
2280.0750	-20	-31.18	-41.50
2660.0875	-20	-29.54	-31.97
3040.1000	-20	-29.80	-35.50
3420.1125	-20	-28.40	-29.03
3800.1250	-20	-36.84	*

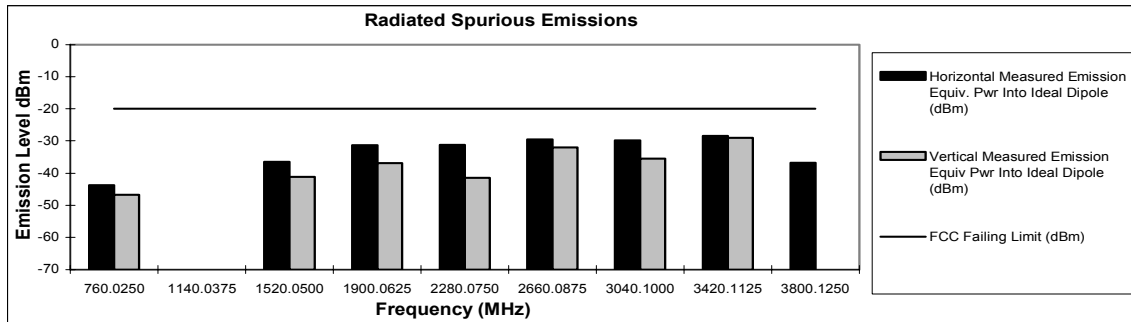


Graph 6G – 1: 5.9 Watts, 380.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 5.9 Watts

425.0125 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	-47.26	*
1275.0375	-20	-38.30	-44.36
1700.0500	-20	-32.35	-35.08
2125.0625	-20	-31.02	-37.01
2550.0750	-20	-36.40	-38.79
2975.0875	-20	-27.82	-30.96
3400.1000	-20	-33.37	-30.69
3825.1125	-20	-36.20	*
4250.1250	-20	*	*

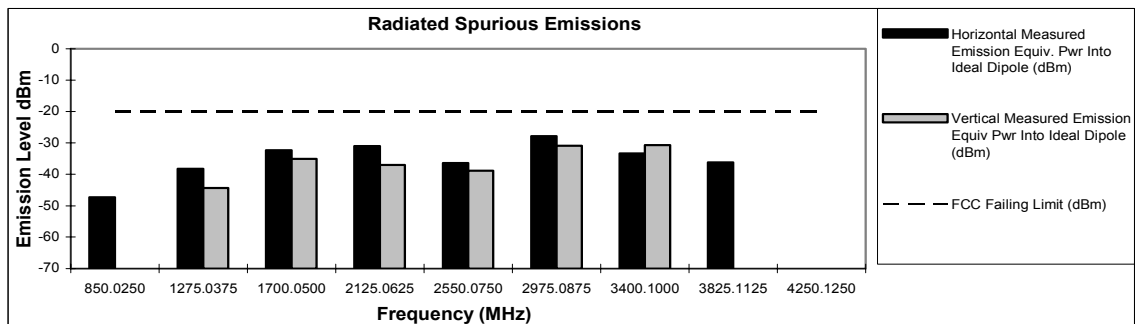

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 2: 5.9 Watts, 425.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 5.9 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-41.74	-39.71
1409.9625	-20	-38.18	-39.61
1879.9500	-20	-28.84	-29.62
2349.9375	-20	-30.49	-38.90
2819.9250	-20	-28.50	-33.16
3289.9125	-20	-30.56	-29.42
3759.9000	-20	-30.63	-33.25
4229.8875	-20	-35.25	-34.07
4699.8750	-20	-37.63	*

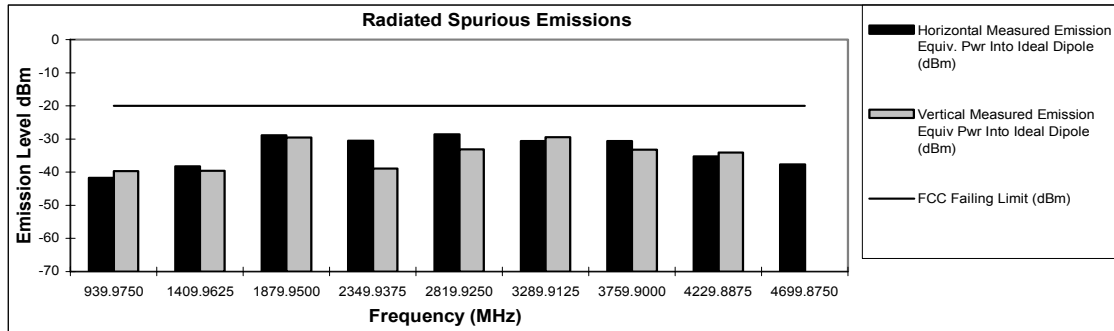

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 3: 5.9 Watts, 469.9875 MHz, 12.5 kHz Channel Spacing

Tx Power: 5.9 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-46.54	-51.76
1140.0375	-13	*	*
1520.0500	-13	-37.10	-40.03
1900.0625	-13	-29.80	-34.07
2280.0750	-13	-31.66	-40.85
2660.0875	-13	-32.40	*
3040.1000	-13	-30.11	-31.91
3420.1125	-13	-29.54	-28.16
3800.1250	-13	-37.58	*

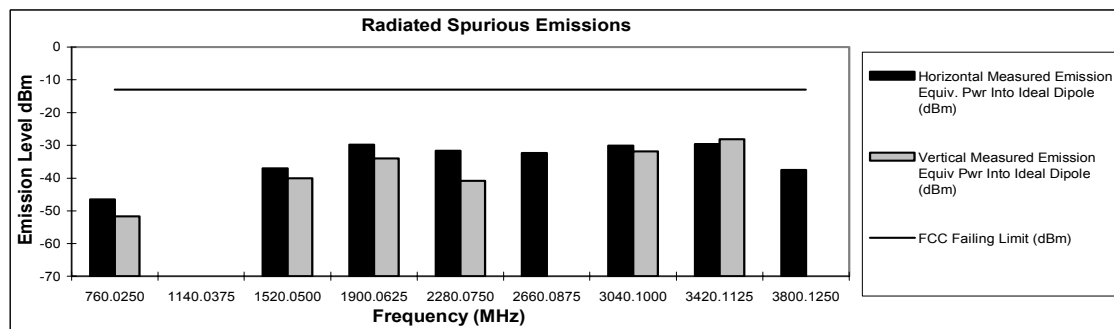


Graph 6G – 4: 5.9 Watts, 380.0125 MHz, 25 kHz Channel Spacing

Tx Power: 5.9 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-45.36	-49.45
1275.0375	-13	-37.71	-44.22
1700.0500	-13	-36.50	-36.18
2125.0625	-13	-30.68	-37.14
2550.0750	-13	-36.62	-37.75
2975.0875	-13	-27.46	-30.13
3400.1000	-13	-31.77	-30.97
3825.1125	-13	-35.86	*
4250.1250	-13	*	*

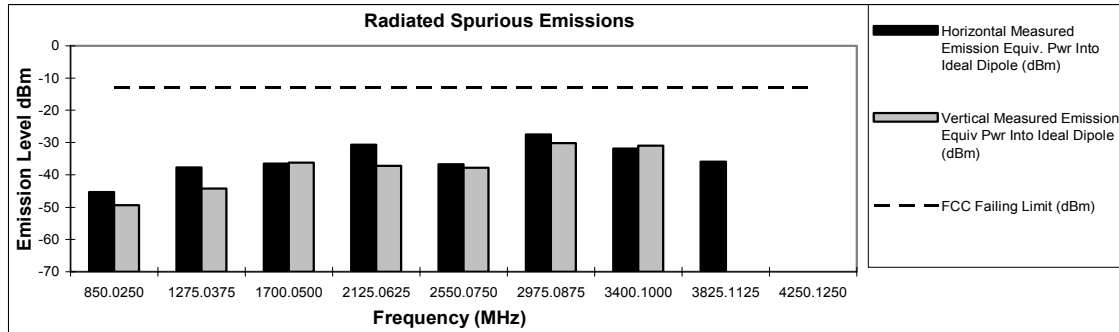

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 5: 5.9 Watts, 425.0125 MHz, 25 kHz Channel Spacing

Tx Power: 5.9 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	-41.49	-38.48
1409.9625	-13	-44.41	-38.74
1879.9500	-13	-28.46	-34.05
2349.9375	-13	-30.41	-40.18
2819.9250	-13	-29.26	-33.23
3289.9125	-13	-31.06	-29.55
3759.9000	-13	-30.90	-33.39
4229.8875	-13	-35.59	-34.32
4699.8750	-13	-38.35	*

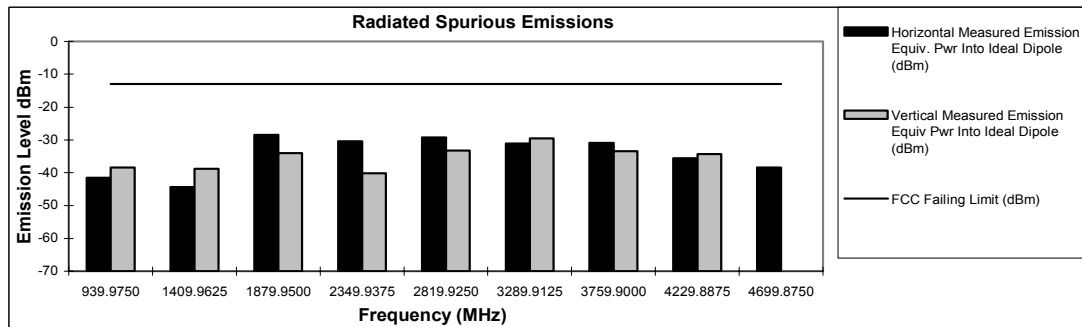

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 6: 5.9 Watts, 469.9875 MHz, 25 kHz Channel Spacing

Tx Power: 2.3 Watts

380.0125 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-20	-34.05	-30.34
1140.0375	-20	*	*
1520.0500	-20	-34.75	-39.35
1900.0625	-20	-39.36	-42.89
2280.0750	-20	-37.60	*
2660.0875	-20	*	*
3040.1000	-20	-33.75	-37.91
3420.1125	-20	-36.80	-35.44
3800.1250	-20	-37.57	*

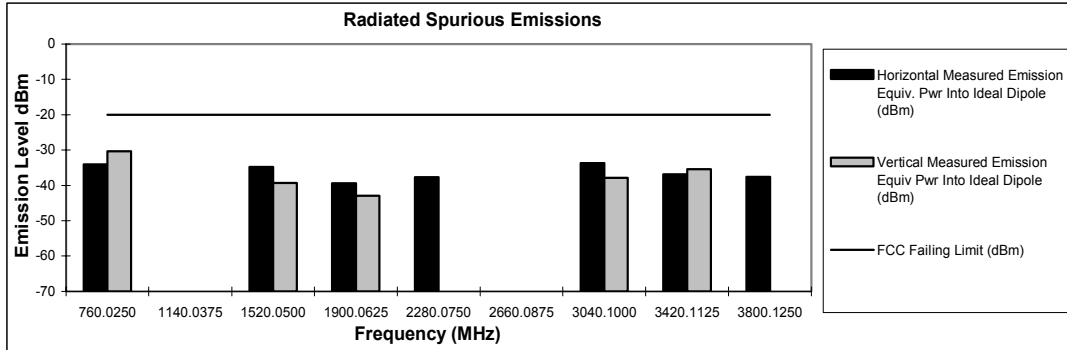


Graph 6G – 7: 2 Watt, 380.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 2.3 Watts

425.0125 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	-38.64	-33.36
1275.0375	-20	-43.79	-44.78
1700.0500	-20	-33.47	-40.96
2125.0625	-20	-41.02	-44.65
2550.0750	-20	*	*
2975.0875	-20	-38.68	-39.55
3400.1000	-20	-37.82	-37.28
3825.1125	-20	*	*
4250.1250	-20	*	*

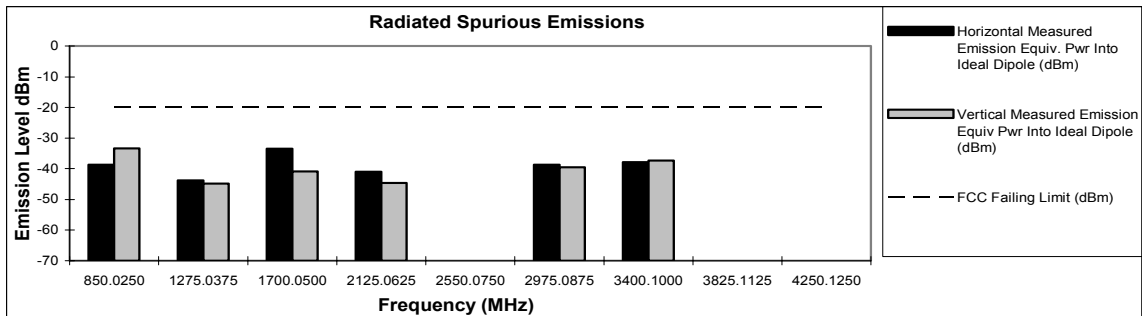

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 8: 2 Watt, 425.0125 MHz, 12.5 kHz Channel Spacing

Tx Power: 2.3 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-41.32	-33.00
1409.9625	-20	-44.38	-46.85
1879.9500	-20	-38.43	-37.52
2349.9375	-20	-40.46	*
2819.9250	-20	*	*
3289.9125	-20	*	*
3759.9000	-20	-38.84	*
4229.8875	-20	*	*
4699.8750	-20	*	*

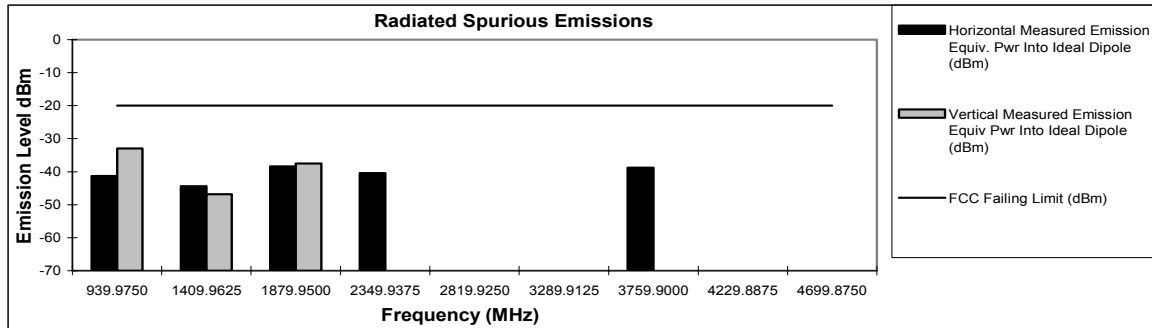

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 9: 2 Watt, 469.9875 MHz, 12.5 kHz Channel Spacing

Tx Power: 2.3 Watts

380.0125 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	-34.90	-37.84
1140.0375	-13	*	*
1520.0500	-13	-32.74	-37.99
1900.0625	-13	-35.73	-39.55
2280.0750	-13	-36.64	-41.93
2660.0875	-13	*	*
3040.1000	-13	-34.39	-36.78
3420.1125	-13	-33.82	-34.67
3800.1250	-13	-36.90	*

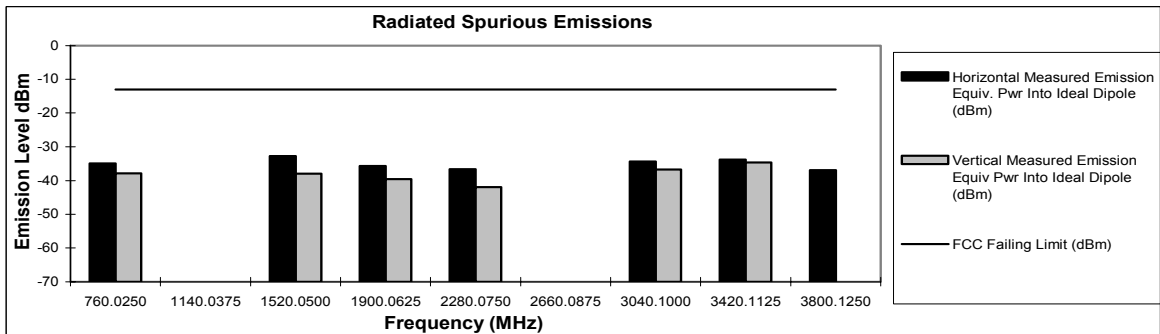


Graph 6G – 10: 2 Watt, 380.0125 MHz, 25 kHz Channel Spacing

Tx Power: 2.3 Watts

425.0125 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-13	-37.04	-36.02
1275.0375	-13	-41.80	-48.58
1700.0500	-13	-33.48	-39.79
2125.0625	-13	-40.58	-45.02
2550.0750	-13	*	*
2975.0875	-13	-37.97	-38.20
3400.1000	-13	-37.58	-37.39
3825.1125	-13	*	*
4250.1250	-13	*	*

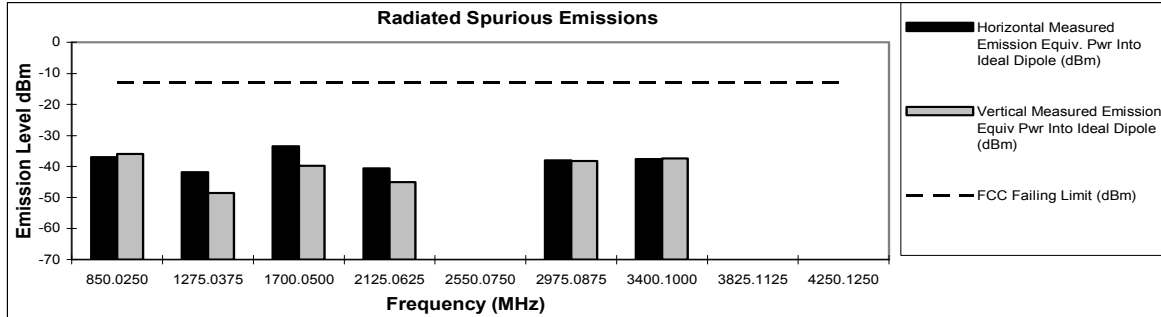

* Indicates the spurious emission could not be detected due to noise limitations or ambients.


Graph 6G – 11: 2 Watt, 425.0125 MHz, 25 kHz Channel Spacing

Tx Power: 2.3 Watts

469.9875 MHz

Channel Spacing 25kHz | S/N TOVAZ07M

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-13	-41.20	-30.43
1409.9625	-13	-43.52	-46.70
1879.9500	-13	-32.28	-36.90
2349.9375	-13	-40.33	-43.18
2819.9250	-13	*	*
3289.9125	-13	*	-39.67
3759.9000	-13	-38.69	*
4229.8875	-13	*	*
4699.8750	-13	*	*

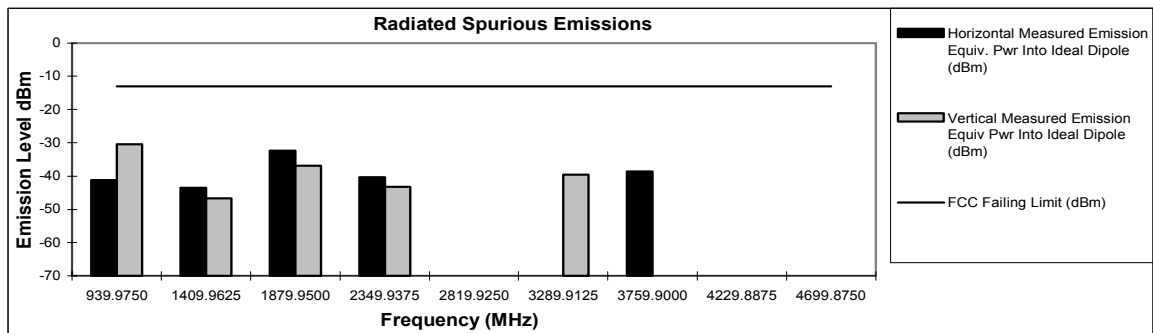

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Graph 6G – 12: 2 Watt, 469.9875 MHz, 25 kHz Channel Spacing

EXHIBIT 6H

Frequency Stability - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

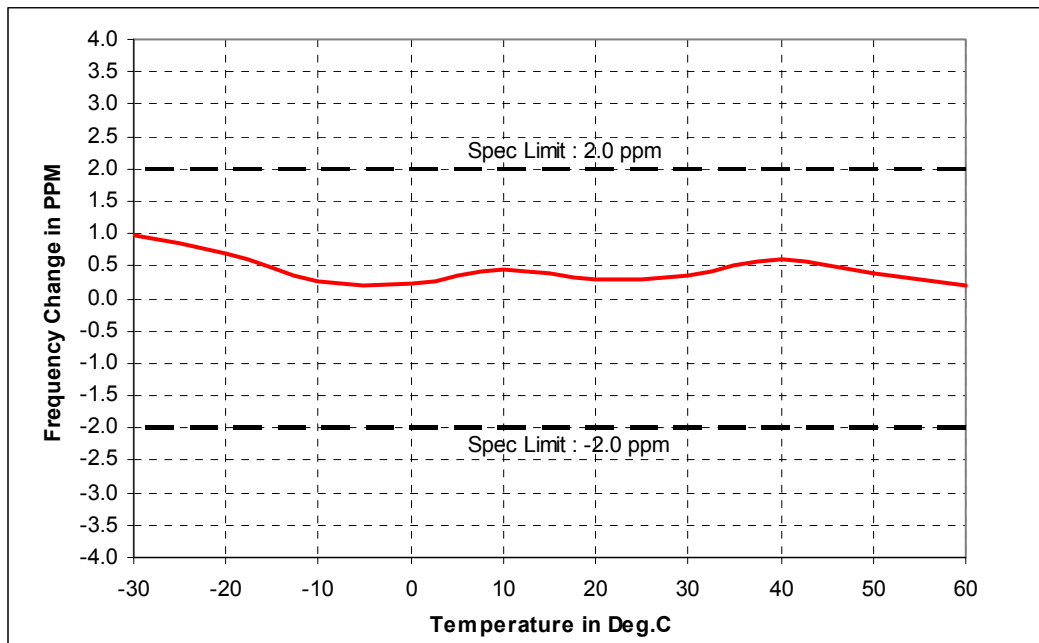


Figure 6H-1: Frequency Stability vs. Temperature

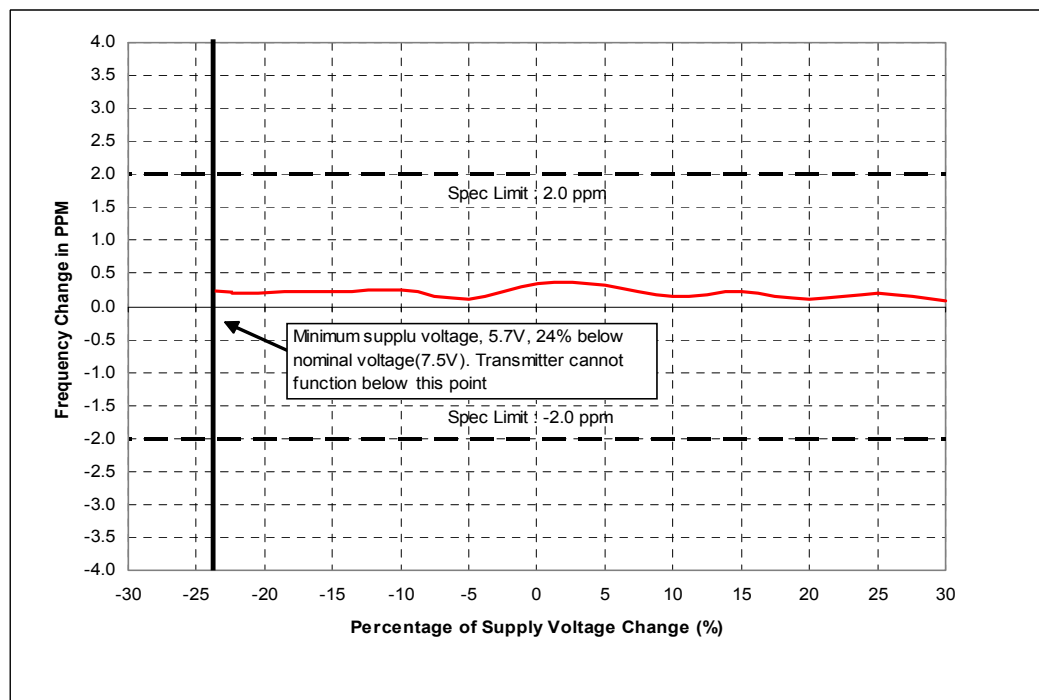


Figure 6H-2: Frequency Stability vs. Voltage

EXHIBIT 6I

Transient Frequency Behavior (FCC Rules Part 90.214)

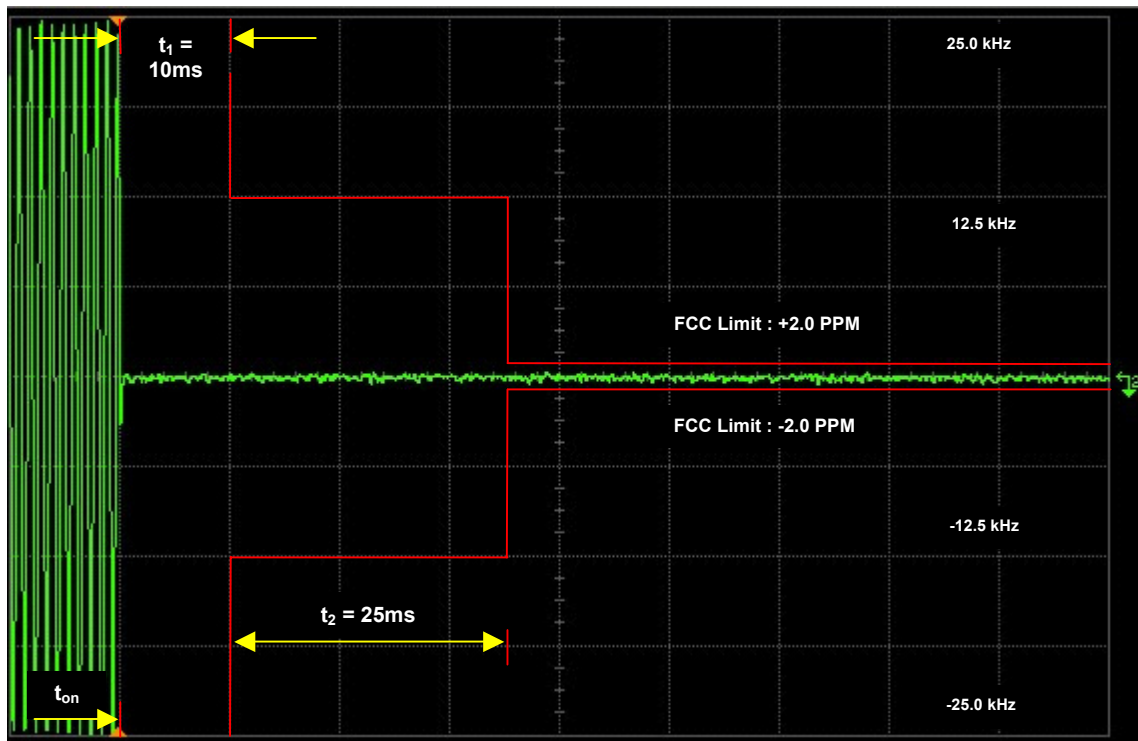


Figure 6I-1: 5.9 Watts, 12.5 kHz Key-Up Attack Time

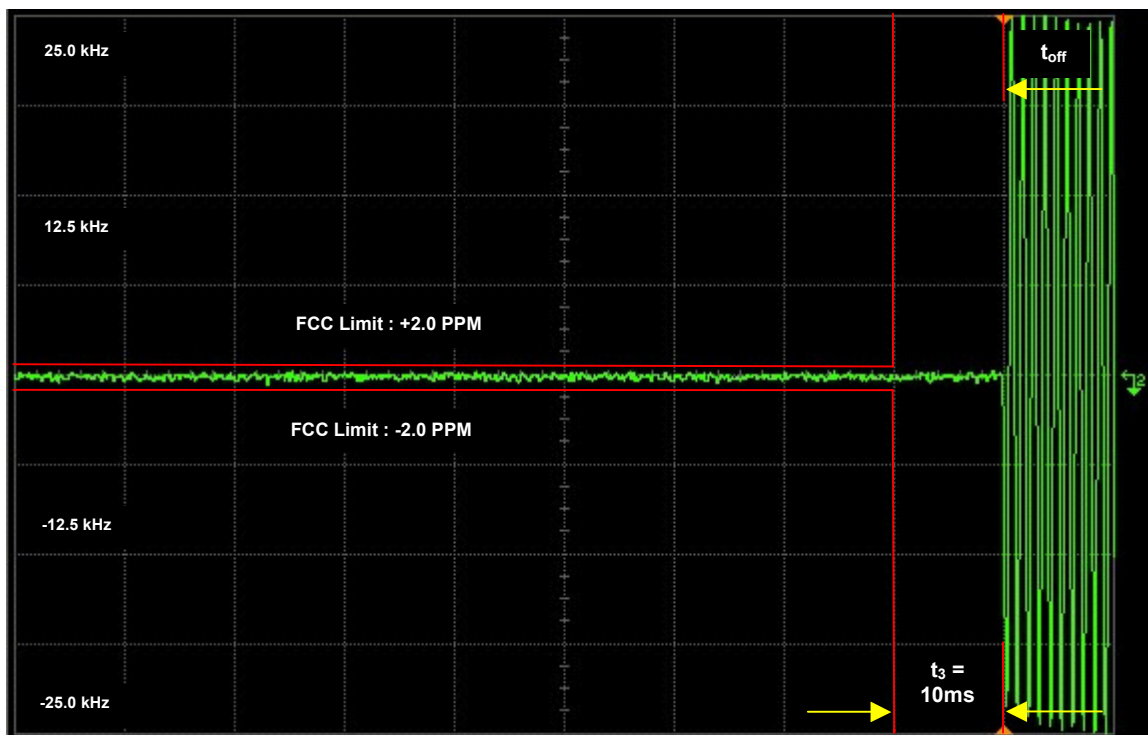


Figure 6I-2: 5.9 Watts, 12.5 kHz De-Key Decay Time

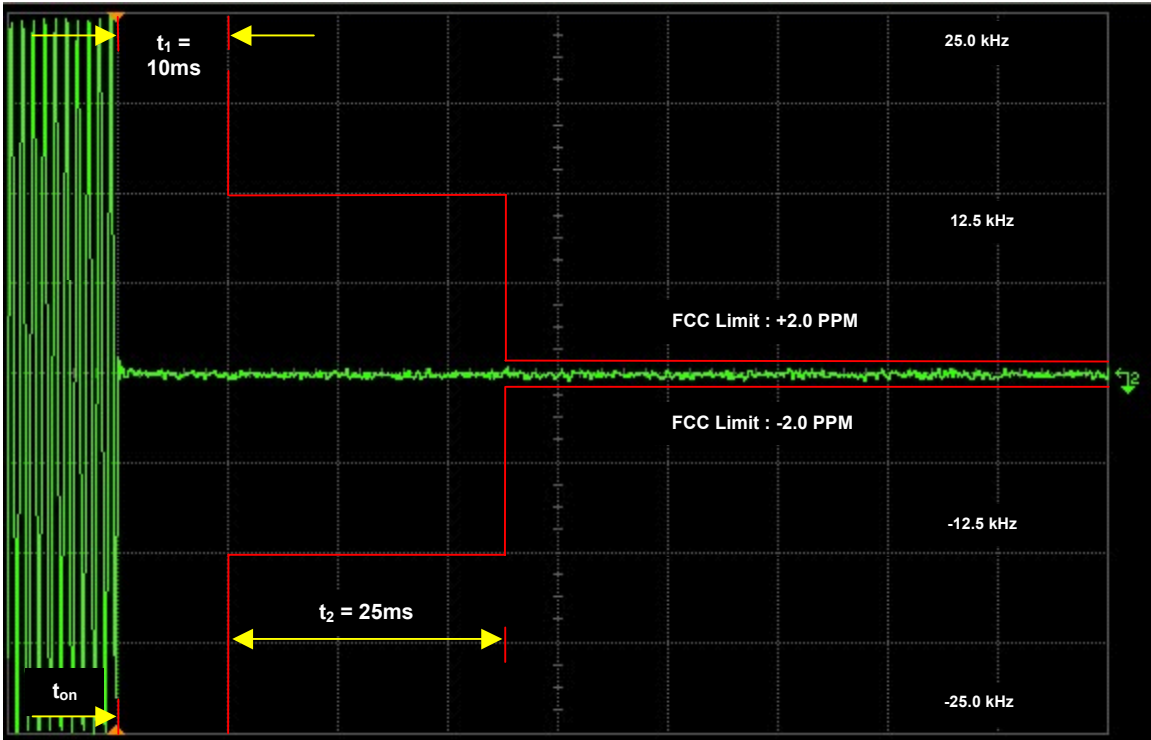


Figure 6I-3: 5.9 Watts, 25 kHz Key-Up Attack Time

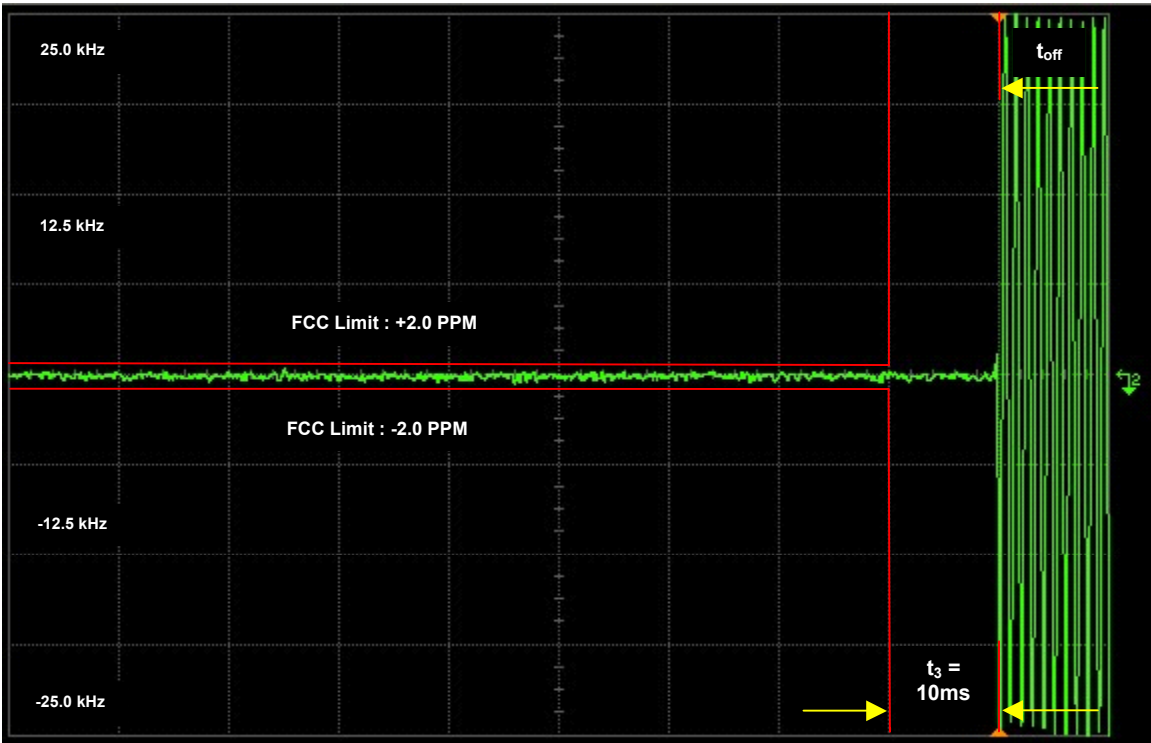


Figure 6I-4: 5.9 Watts, 25 kHz De-Key Decay Time

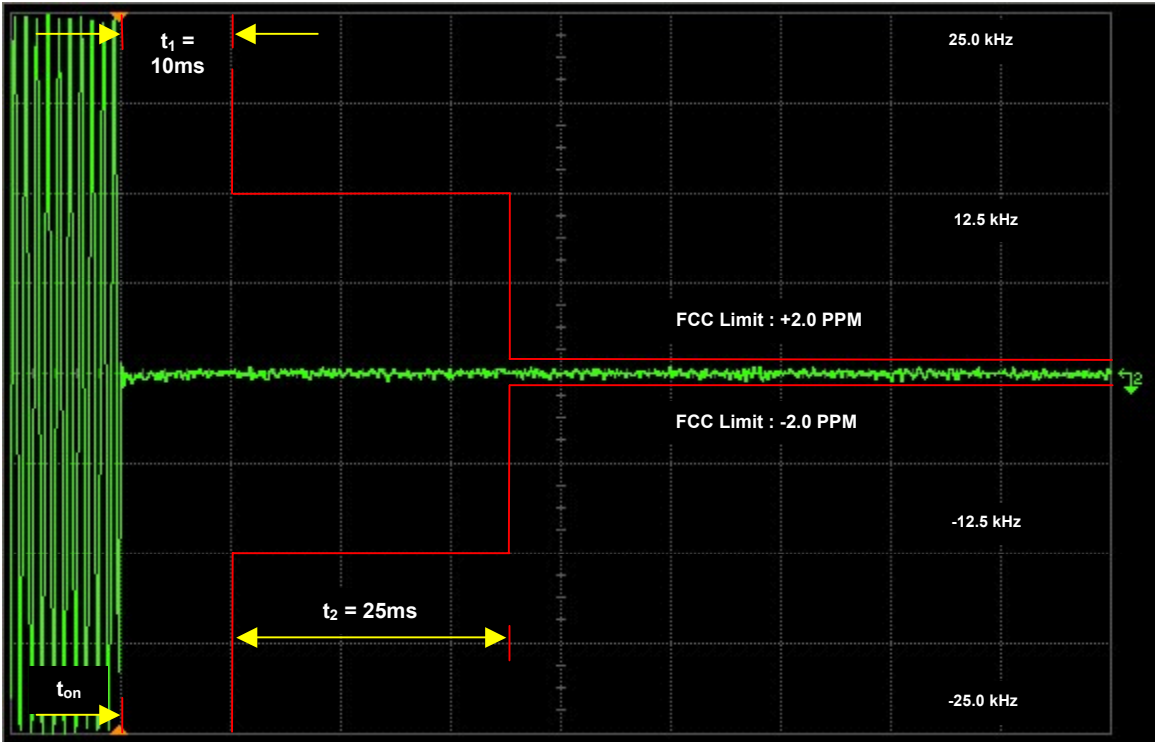


Figure 6I-5: 2 Watt, 12.5 kHz Key-Up Attack Time

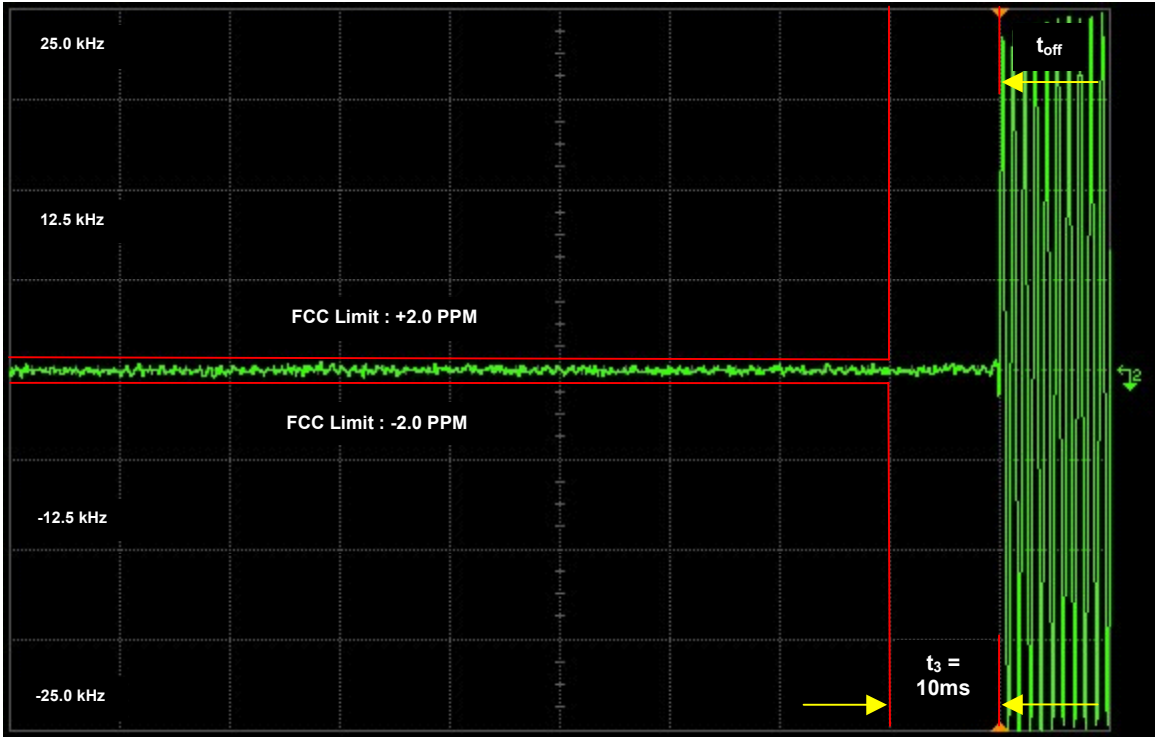


Figure 6I-6: 2 Watt, 12.5 kHz De-Key Decay Time

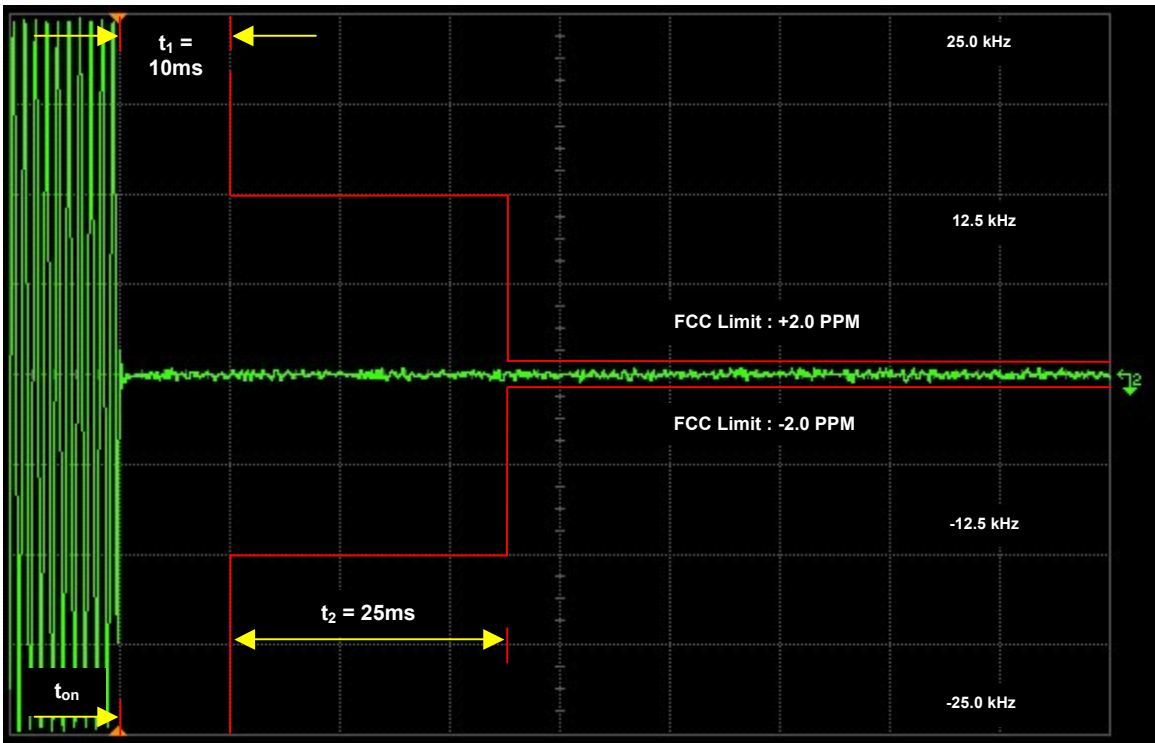


Figure 6I-7: 2 Watt, 25 kHz Key-Up Attack Time

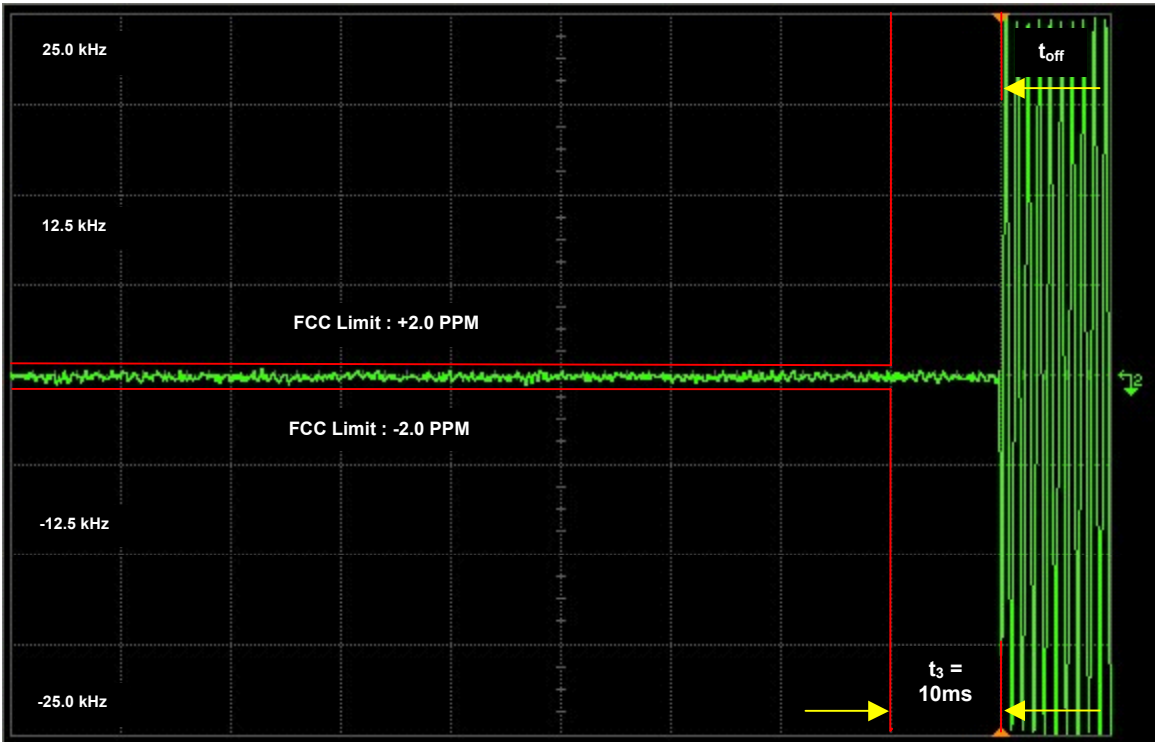


Figure 6I-8: 2 Watt, 25 kHz De-Key Decay Time