

	  																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.C																																
<table><tr><td>Date/s Tested</td><td>: 09-Feb-2024 - 23-Feb-2024</td></tr><tr><td>Report Issue Date</td><td>: 06-Mar-2024</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: IMAN BINTI IZULMAN</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Product Version (PMN)</td><td>: R2</td></tr><tr><td>Model Number (HVIN)</td><td>: AAH11YDC9JA2AN</td></tr><tr><td>Frequency Band</td><td>: 400-480MHz</td></tr><tr><td>Max RF Output Power</td><td>: 4.8 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia.</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version (FVIN)</td><td>: I02.24.01.3006</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12</td><td>PASS</td></tr></table>		Date/s Tested	: 09-Feb-2024 - 23-Feb-2024	Report Issue Date	: 06-Mar-2024	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: IMAN BINTI IZULMAN	Product Type	: Portable	Product Version (PMN)	: R2	Model Number (HVIN)	: AAH11YDC9JA2AN	Frequency Band	: 400-480MHz	Max RF Output Power	: 4.8 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia.	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version (FVIN)	: I02.24.01.3006	(LMR) FCC 47 CFR Part 22 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS
Date/s Tested	: 09-Feb-2024 - 23-Feb-2024																																
Report Issue Date	: 06-Mar-2024																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: IMAN BINTI IZULMAN																																
Product Type	: Portable																																
Product Version (PMN)	: R2																																
Model Number (HVIN)	: AAH11YDC9JA2AN																																
Frequency Band	: 400-480MHz																																
Max RF Output Power	: 4.8 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia.																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version (FVIN)	: I02.24.01.3006																																
(LMR) FCC 47 CFR Part 22 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Farah Nur Arina Test Personnel	Approved Signatory:  Maheshvaran A/L Rajagopal Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	8
5.1. Transmitter Test Conditions	8
6.0 Transmitter Test Parameters	9
6.1. RF Output Power	9
6.1.1. Test Setup	9
6.1.2. Test Result	9
6.2. Frequency Stability	10
6.2.1. Test Setup	10
6.2.2. Test Result	11
6.2.3. Test Limit.....	12
6.3. Modulation Characteristics	13
6.3.1. Test Setup	13
6.3.2. Test Result	14
6.3.3. Test Limit.....	15
6.4. Modulation Limiting.....	17
6.4.1. Test Setup	17
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Occupied Bandwidth.....	20
6.5.1. Test Setup (Analog)	20
6.5.2. Test Result (Analog).....	21
6.5.3. Test Setup (Digital).....	25
6.5.4. Test Result (Digital).....	26
6.5.5. Test Limit.....	32
6.6. Band Edge Conducted Spurious Emission (Part 22)	33
6.6.1. Test Setup (Analog)	33
6.6.2. Test Result (Analog).....	34
6.6.3. Test Setup (Digital).....	36
6.6.4. Test Result (Digital).....	37
6.6.5. Test Limit.....	41
6.7. Transient Frequency Behavior.....	42
6.7.1. Test Setup	42
6.7.2. Test Result	43
6.7.3. Test Limit.....	45
6.8. Adjacent Channel Power.....	46
6.8.1. Test Setup (Analog).....	46
6.8.2. Test Result	46
6.8.3. Test Setup (Digital).....	47

6.8.4.	Test Result	47
6.8.5.	Test Limit.....	48
6.9.	Conducted Spurious Emission	50
6.9.1.	Test Setup	50
6.9.2.	Test Result (Analog)	51
6.9.3.	Test Result (Digital).....	59
6.9.4.	Test Limit.....	66
6.10.	Radiated Spurious Emission	67
6.10.1.	Test Setup	67
6.10.2.	Test Result (Analog)	68
6.10.3.	Test Result (Digital).....	76
6.10.4.	Test Limit.....	84
6.11.	Effective Radiated Power (ERP)	85
6.11.1.	Test Setup	85
6.11.2.	Test Result	86
6.11.3.	Test Limit.....	86
6.12.	GNSS (EIRP for 1559 - 1610MHz).....	87
6.12.1.	Test Setup	87
6.12.1.	Test Result	88
6.12.2.	Test Limit.....	88

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	06-Mar-2024	Farah
Rev. B	Change Product Type from Hand-Held to Portable	14-Mar-2024	Farah
Rev. C	Update Radiated Emission worst case value	20-Mar-2024	Farah

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, 4FSK

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATT LIION IP55 2400T	MOTOROLA	PMNN4598A
ANTENNA, STAMPED METAL,UHF SLIM WHIP ANTENNA (400-527MHZ)	MOTOROLA	PMAE4079A

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046(a), 22.565(f)	RSS-Gen RSS-119	RF Power Output	Pass		902EAB7524
2.1055, 22.355	RSS-Gen RSS-119	Frequency Stability	Pass		902EAB7524
2.1047	RSS-Gen RSS-119	Audio Frequency Response	Pass		902EAB7524
2.1047	RSS-Gen RSS-119	Audio Low Pass Filter Response	Pass		902EAB7524
2.1047	RSS-Gen RSS-119	Modulation limiting	Pass		902EAB7524
2.1049, 22.359, 90.21	RSS-Gen RSS-119	Occupied Bandwidth	Pass	16K0F3E: 14.9985 kHz 11K0F3E: 9.8605 kHz 7K60F1D/FXD: 7.5815 kHz 7K60F1E/FXE: 7.1556 kHz 7K60F1W: 7.4344 kHz	902EAB7524
2.1051, 22.359 (a), (b)	RSS-119	Band Edge Conducted Spurious Emission	Pass		902EAB7524
90.214	RSS-119	Transient Frequency Behavior	Pass		902EAB7524
-	-	Adjacent Channel Power	NA	NA	NA
2.1051, 22.359, 90.210	RSS-Gen RSS-119	Conducted Spurious Emissions	Pass	Worst case: -39.62 dBm	902EAB7524
2.1051, 22.359	RSS-Gen RSS-119	Radiated Spurious Emission	Pass	Worst case: -52.4 dBm (margin: 32.4 dB)	902EAB7509
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

NOTE1: Selection of test parameters, the report contain a limited number of parameters deemed to be influenced by the relevant design changes, as agreed with the applicant.

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: FCC_Analog_v2.5.0)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
CHAMBER	SH-641	92009188	09-Mar-23	09-Mar-24
POWER METER	E4416A	GB41293747	03-Nov-23	03-Nov-24
POWER SUPPLY	6032A	3232A08410	20-Jun-23	20-Jun-24
CXA SIGNAL ANALYZER	N9000B	MY60251574	20-May-23	20-May-24
AUDIO ANALYZER	U8903B	MY61070005	21-Jun-23	21-Jun-24
POWER SENSOR	E4412A	MY50000141	21-Aug-23	21-Aug-24
POWER METER	E4416A	GB41293747	03-Nov-23	03-Nov-24

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.2.1)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
SWITCH CONTROL UNIT	3488A	2719A36210	Not Required	Not Required
ATTENUATOR / SWITCH DRIVER	11713A	3748A09090	Not Required	Not Required
POWER METER	E4416A	MY45101016	01-Mar-23	01-Mar-24
POWER SENSOR (WITH 30DB PAD)	E9301B	MY50180003	20-Jun-23	20-Jun-24
STEP ATTENUATOR	8496G	MY52300757	20-Jun-23	20-Jun-24
SIGNAL GENERATOR	8657A	3250A05137	22-Jun-23	22-Jun-24
AUDIO ANALYZER	8903B	3011A12671	16-Mar-23	16-Mar-24
MODULATION ANALYZER	8901B	3749A05886	26-Sep-23	26-Sep-24
ATTENUATOR/110DB	8494G	MY52300115	20-Aug-23	20-Aug-24
POWER SUPPLY	6031A	3313A02714	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4443A	MY46181974	01-Dec-23	01-Dec-24
AUDIO ANALYZER	8903B	3011A12380	29-Dec-23	29-Dec-24
POWER METER	E4416A	GB41293866	09-Jan-24	09-Jan-25
CXA SIGNAL ANALYZER	N9000B	MY60250530	12-Dec-23	12-Dec-24

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
SWITCH CONTROL UNIT	3488A	2719A32735	Not Required	Not Required
INTERFACE BOX - FILTER	NA	CS001	Not Required	Not Required
POWER SUPPLY	6031A	3506A03271	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4440A	MY46186938	20-Oct-23	20-Oct-24

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	FM	400.0125 406.2 450.025 459.125 467.775 469.9875 479.9875	Farah	23.4°C, 50%RH
Frequency Stability	Max	FM	467.775	Farah	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	FM	459.125 467.775	Farah	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	FM	459.125 467.775	Farah	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	FM	459.125 467.775	Farah	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	FM/4FSK	406.2 450.025 467.775 473.0125 511.9875 459.125	Farah	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	FM/4FSK	459.025 459.65 473.0125 479.2875	Farah	23.4°C, 50%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	FM	467.775	Farah	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	NA	NA	Farah	23.4°C, 50%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	FM/4FSK	400.0125 406.2 450.025 459.125 467.775 479.9875	Farah	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	FM/4FSK	400.0125 406.2 450.025 459.125 467.775 479.9875	Zharif & Nazrin	23.4°C, 71.3%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	NA	NA	NA	NA
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	NA	NA	NA	NA

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

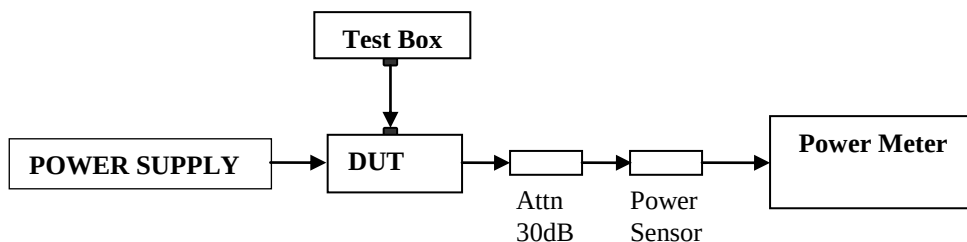


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	7.5V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
400.0125	0.96	0.71	4.66	1.45	Not for FCC review
406.20000	0.97	0.69	4.70	1.40	
450.02500	1.00	0.64	4.74	1.43	
459.12500	0.98	0.64	4.72	1.45	
467.77500	1.00	0.68	4.75	1.48	
469.98750	1.00	0.68	4.77	1.45	
479.98750	1.00	0.66	4.77	1.50	Not for FCC review

6.2. Frequency Stability

6.2.1. Test Setup

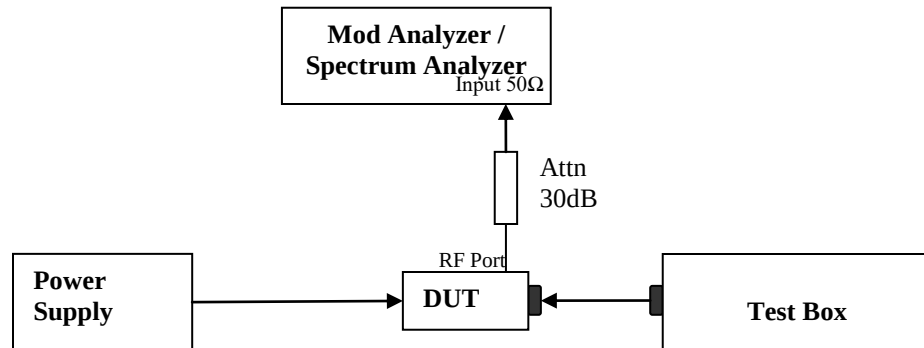


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

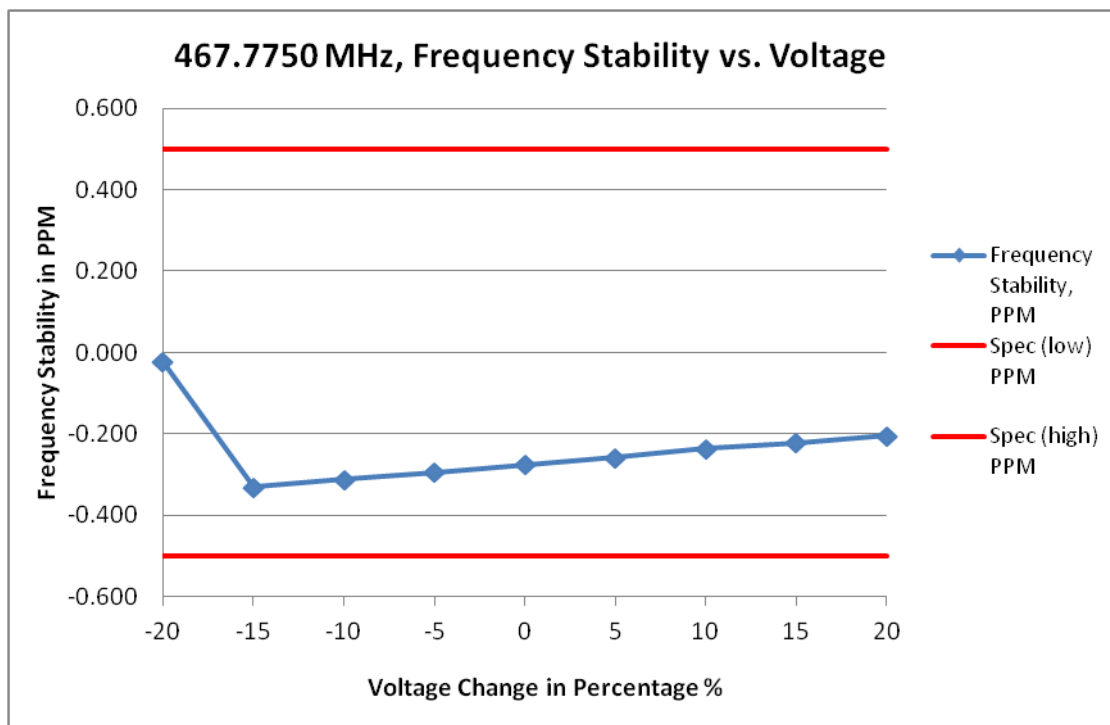

(i) Frequency Stability VS Voltage

467.7750 MHz / 12.5 kHz					
25					
Frequency / Channel Spacing					
Temperature, °C					
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	4.440	467.774990	-0.021	-0.500	0.500
-15	6.370	467.774845	-0.330	-0.500	0.500
-10	6.750	467.774854	-0.312	-0.500	0.500
-5	7.120	467.774862	-0.295	-0.500	0.500
0	7.500	467.774871	-0.276	-0.500	0.500
5	7.870	467.774879	-0.258	-0.500	0.500
10	8.250	467.774890	-0.236	-0.500	0.500
15	8.620	467.774896	-0.222	-0.500	0.500
20	9.000	467.774904	-0.204	-0.500	0.500

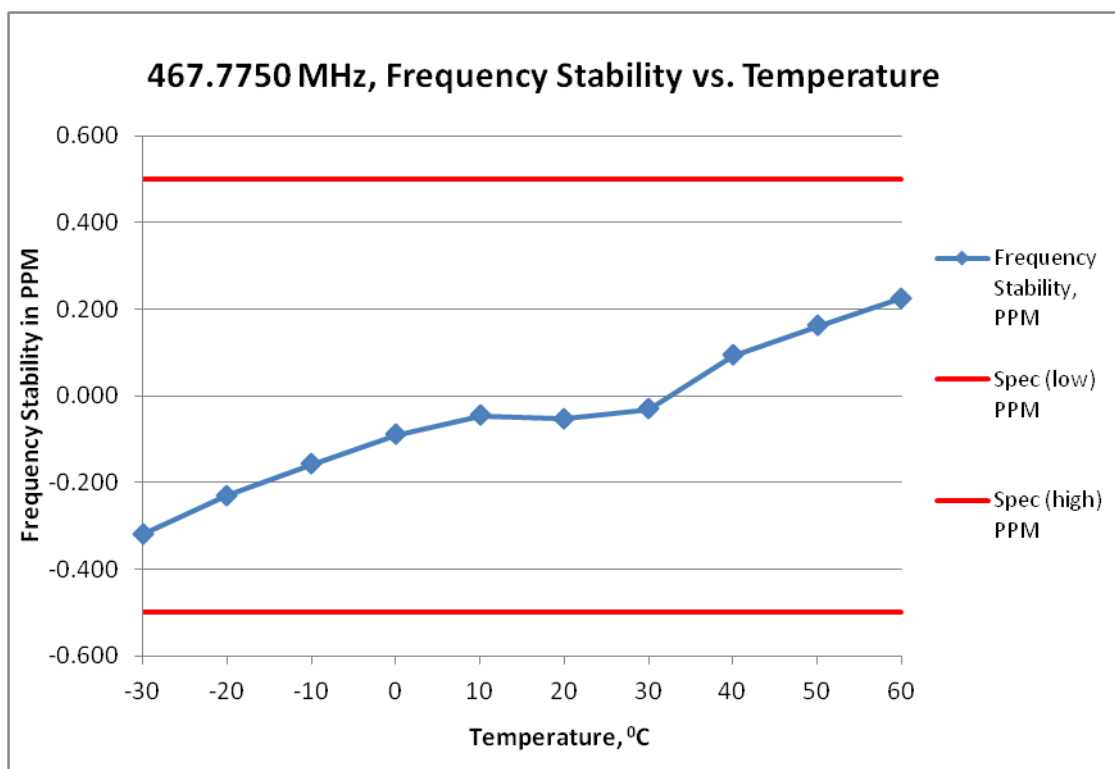

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.774851	-0.319	-0.500	0.500
-20	467.774893	-0.230	-0.500	0.500
-10	467.774926	-0.158	-0.500	0.500
0	467.774958	-0.089	-0.500	0.500
10	467.774979	-0.046	-0.500	0.500
20	467.774975	-0.054	-0.500	0.500
30	467.774985	-0.031	-0.500	0.500
40	467.775044	0.093	-0.500	0.500
50	467.775076	0.162	-0.500	0.500
60	467.775105	0.225	-0.500	0.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 0.5ppm



6.3. Modulation Characteristics



6.3.1. Test Setup

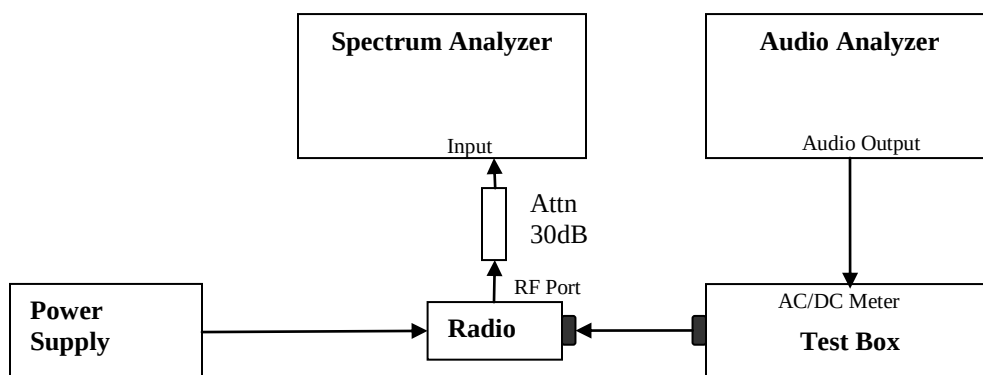


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as 0dB reference
- 6) Vary the audio frequency from 300 Hz to 20 kHz. Record the change in modulation in reference to step 5.

6.3.2. Test Result

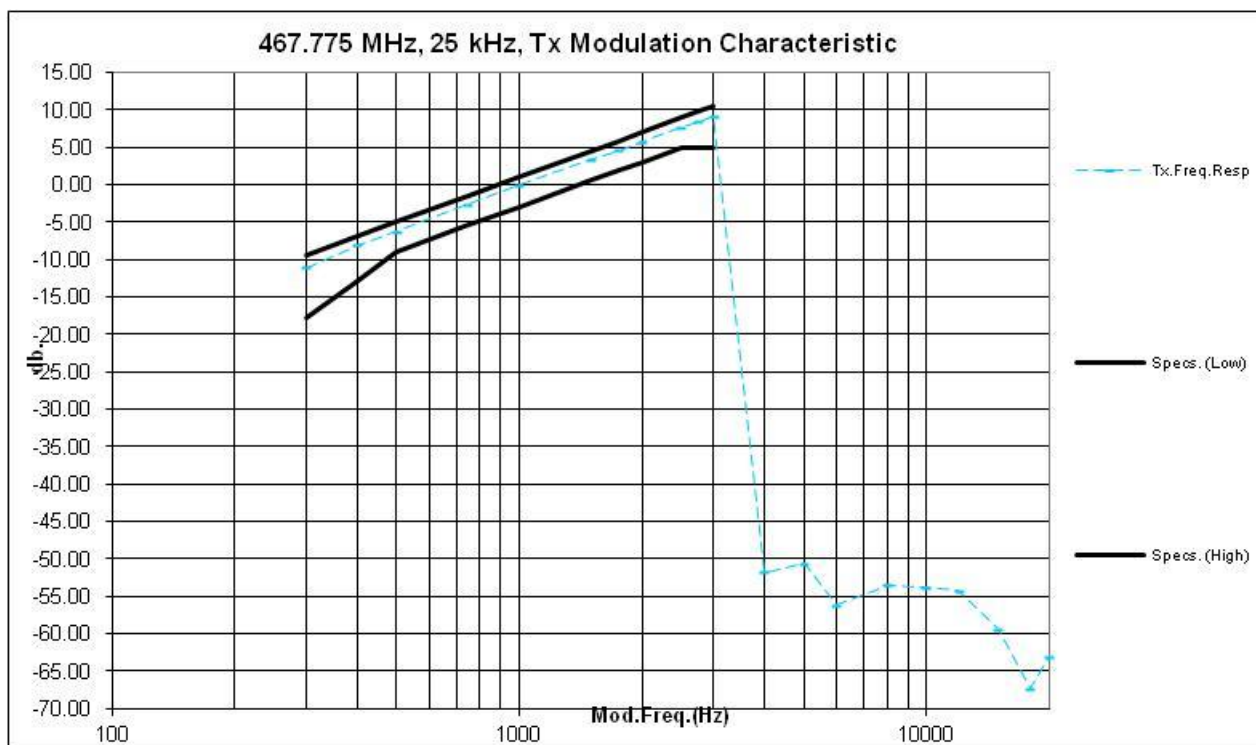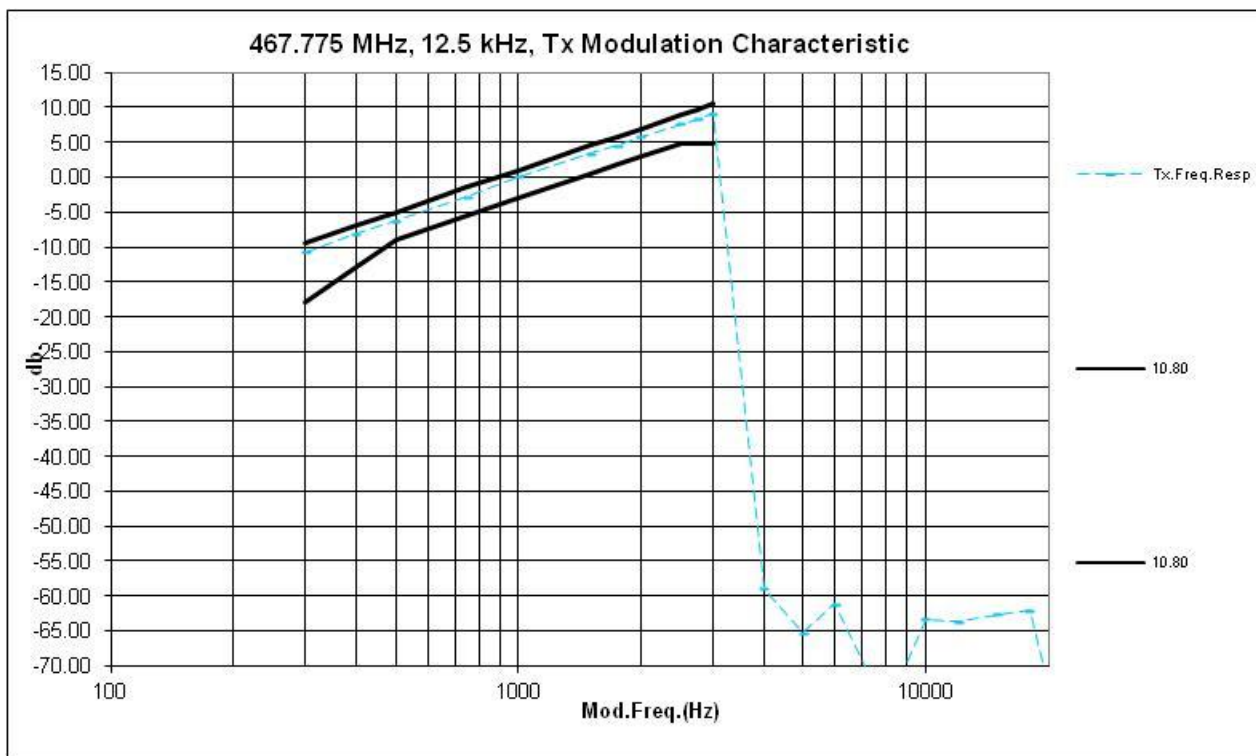

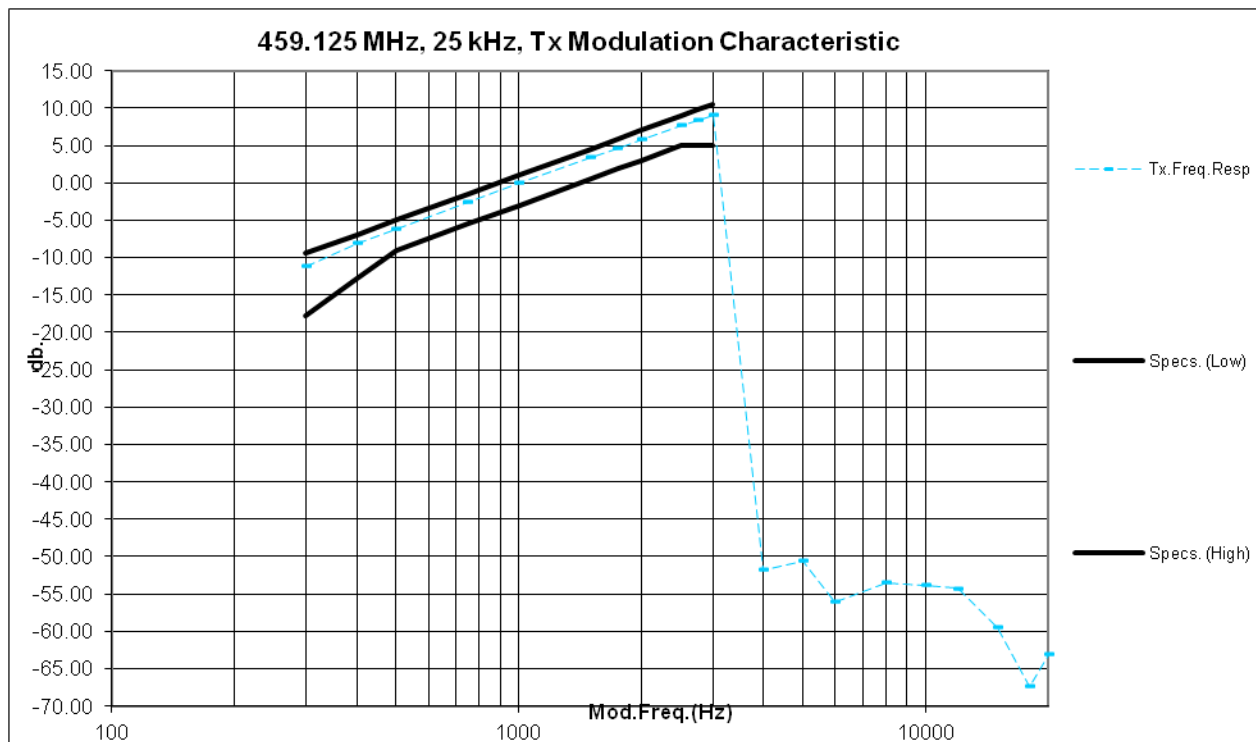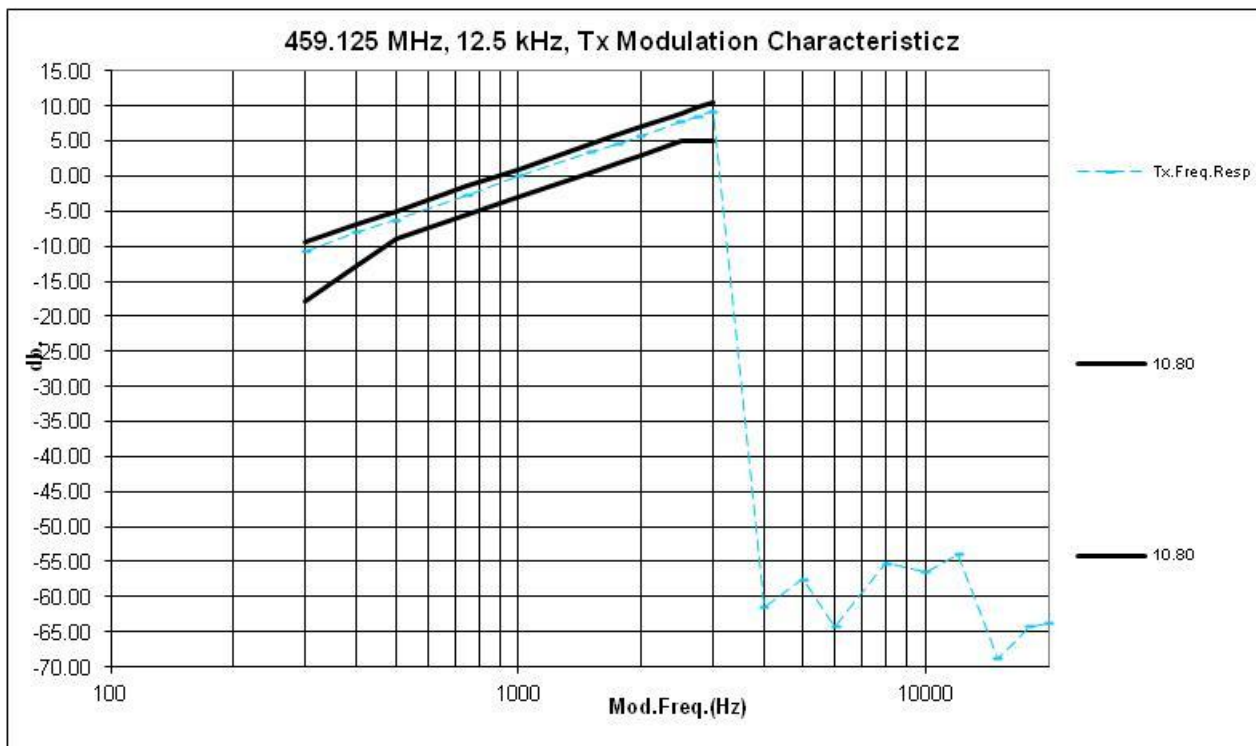

6.3.3. Test Limit

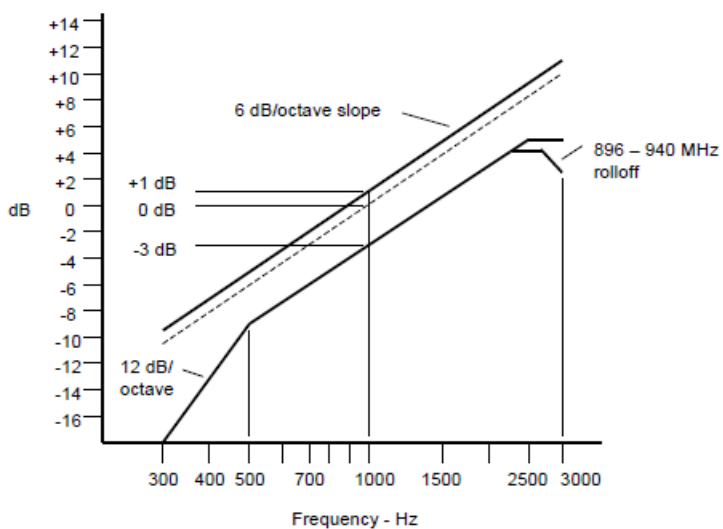


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


6.4. Modulation Limiting

6.4.1. Test Setup

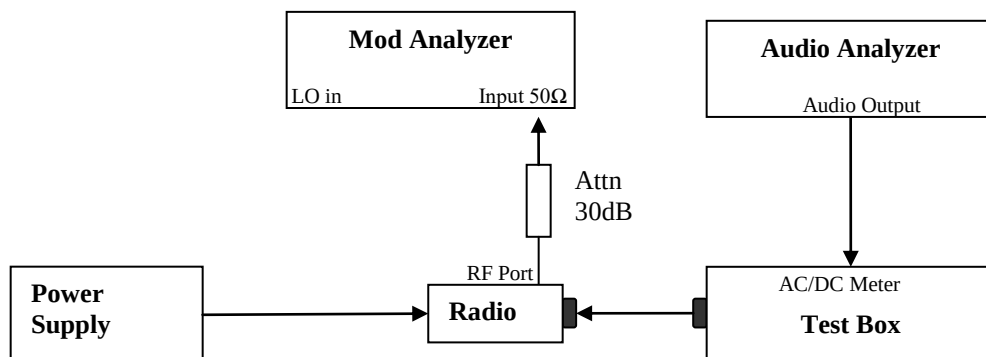

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.4.2. Test Result

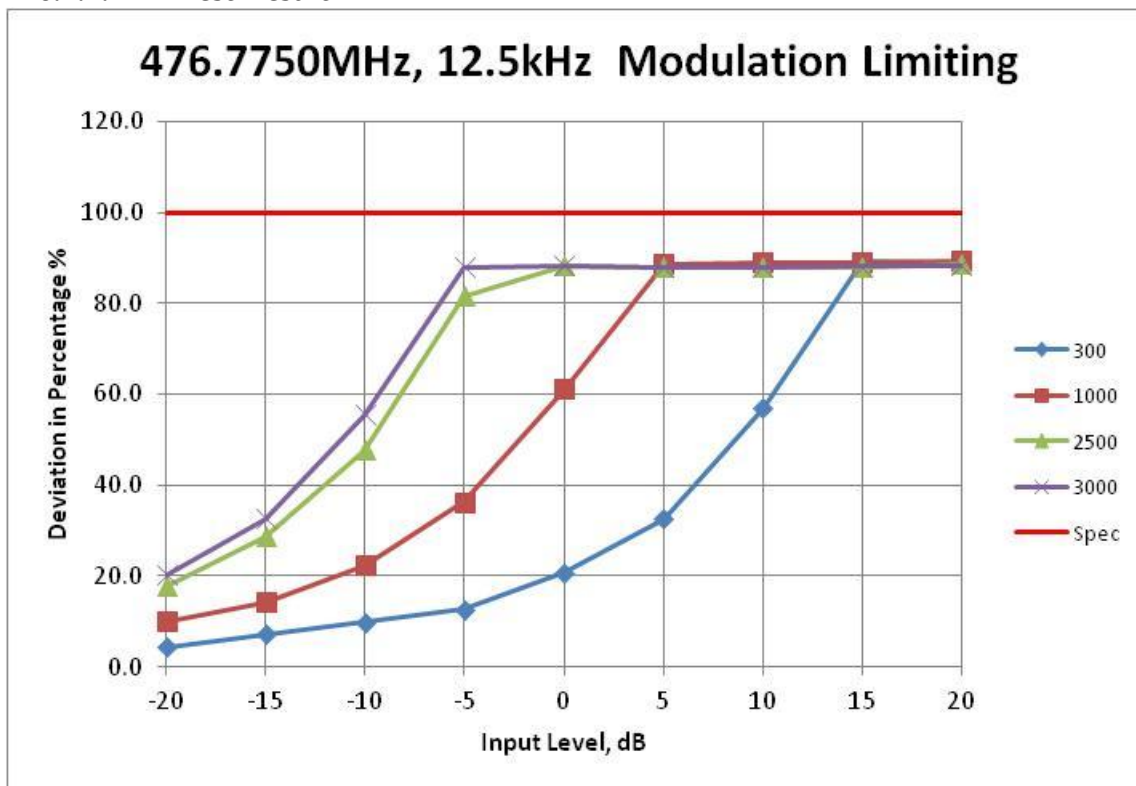




6.4.3. Test Limit
Modulation Limiting shall not exceed 100 percent.


6.5. Occupied Bandwidth

6.5.1. Test Setup (Analog)

A. Get Fc for reference

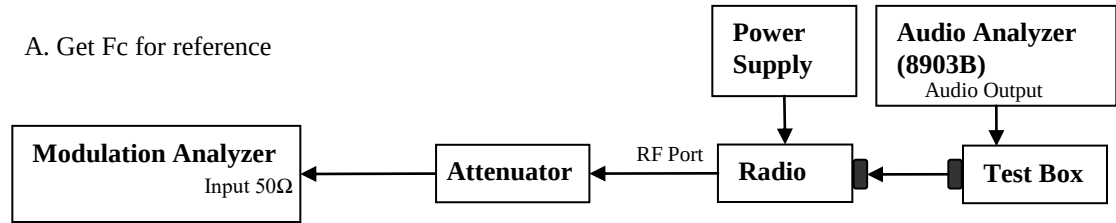

B. Testing


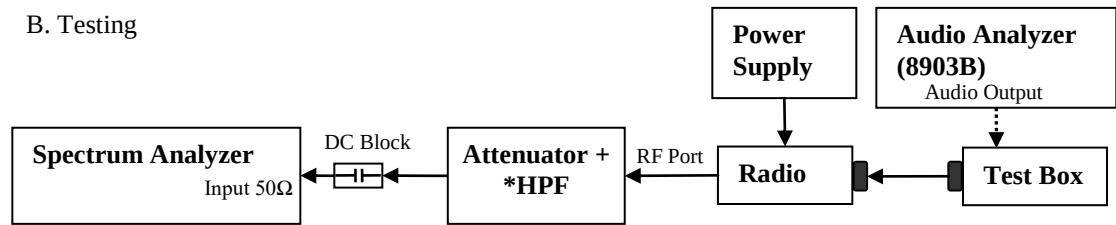




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.



* Only HPF added for Mask 80.211 measurement with attenuator.



* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.5.2. Test Result (Analog)

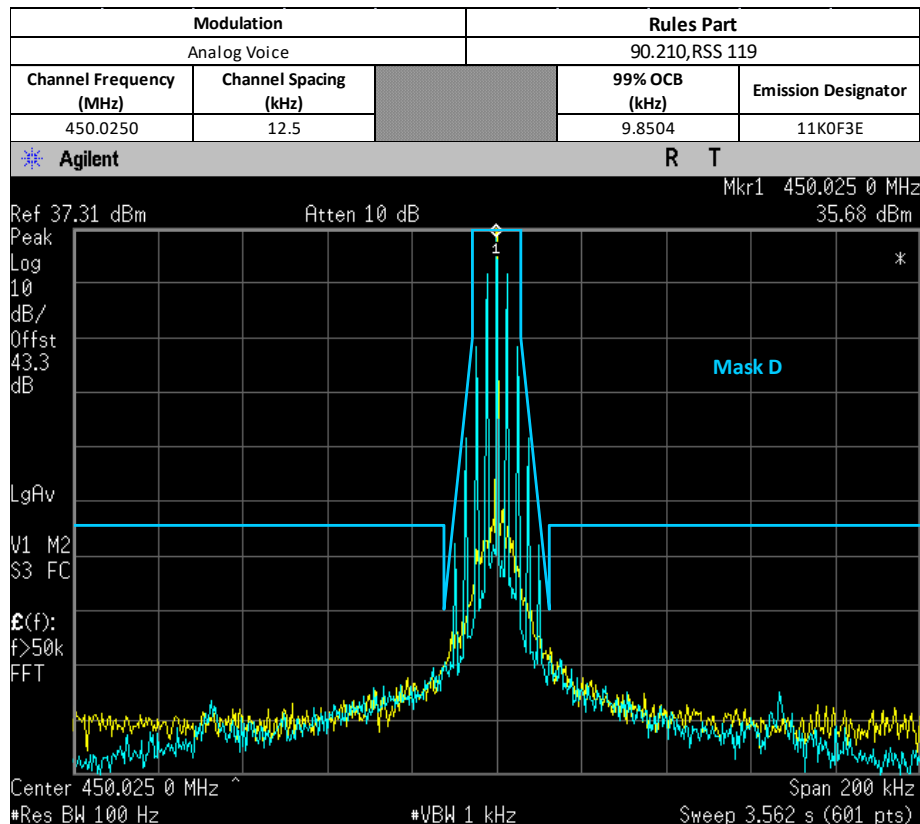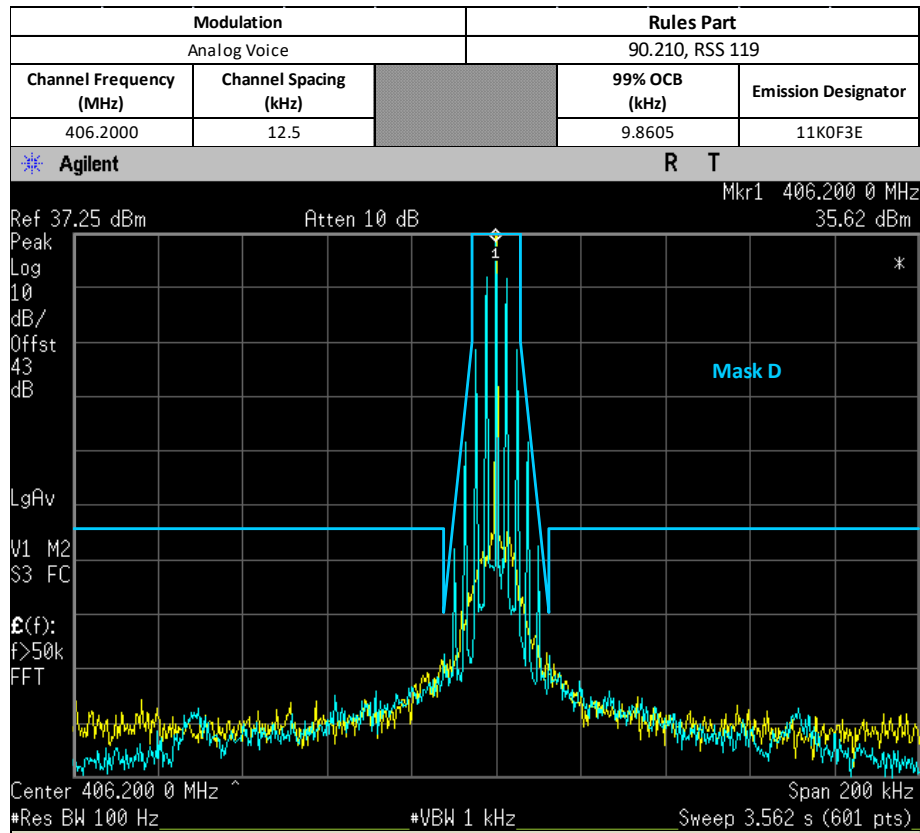


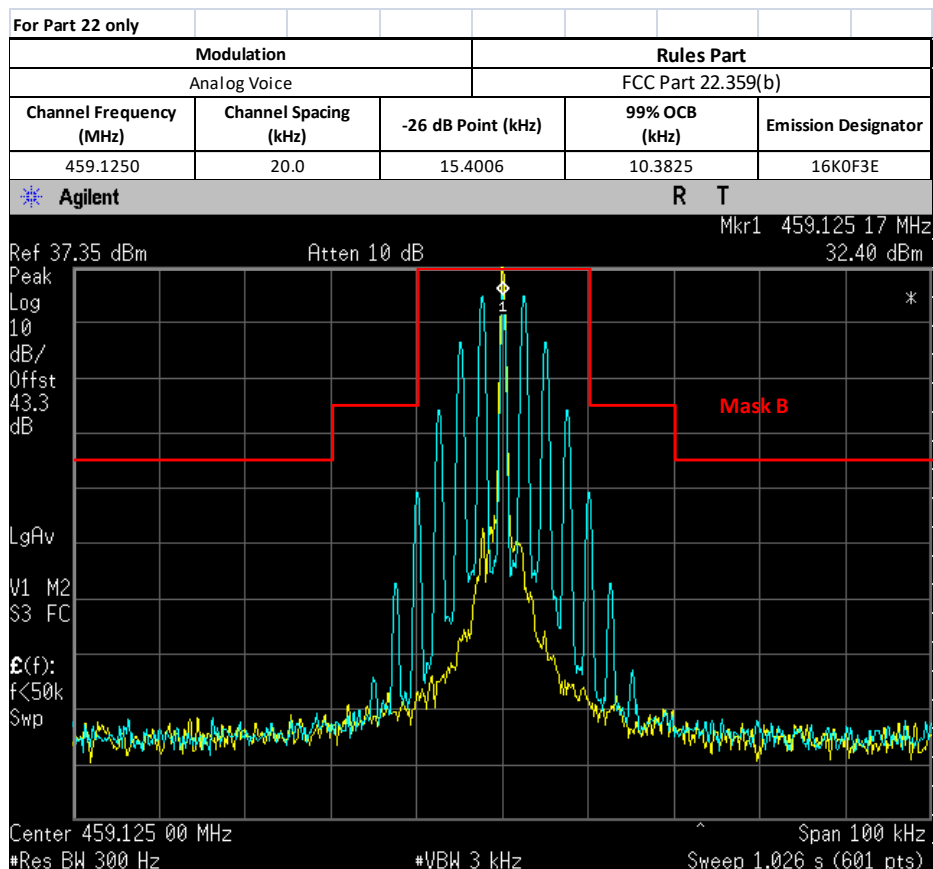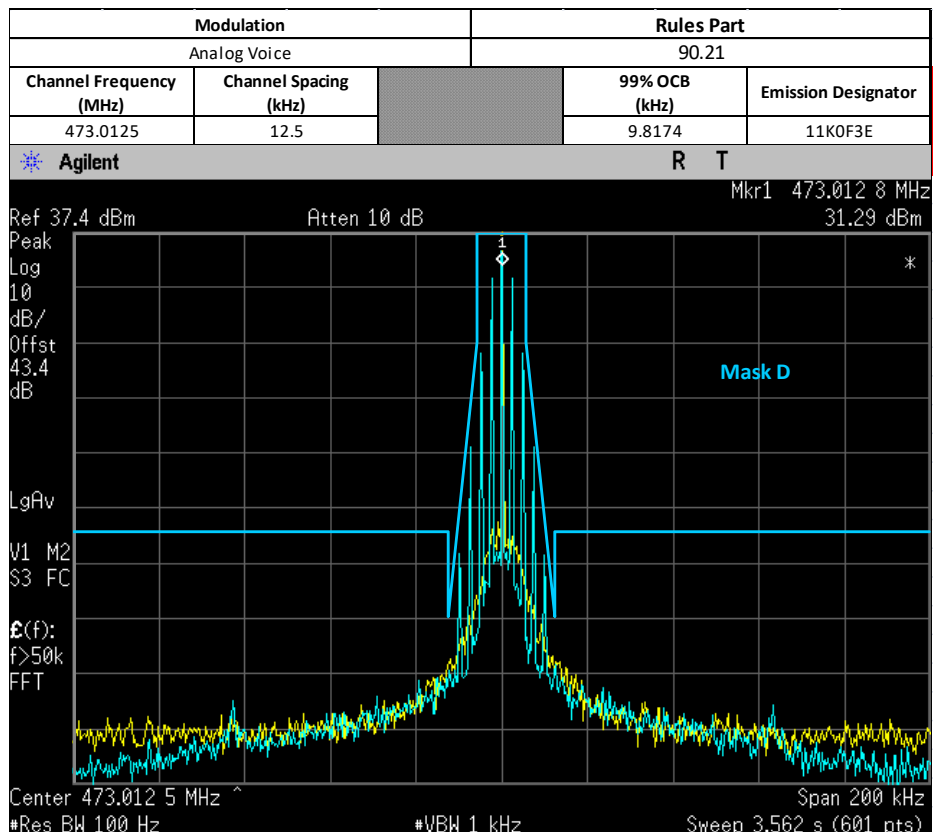

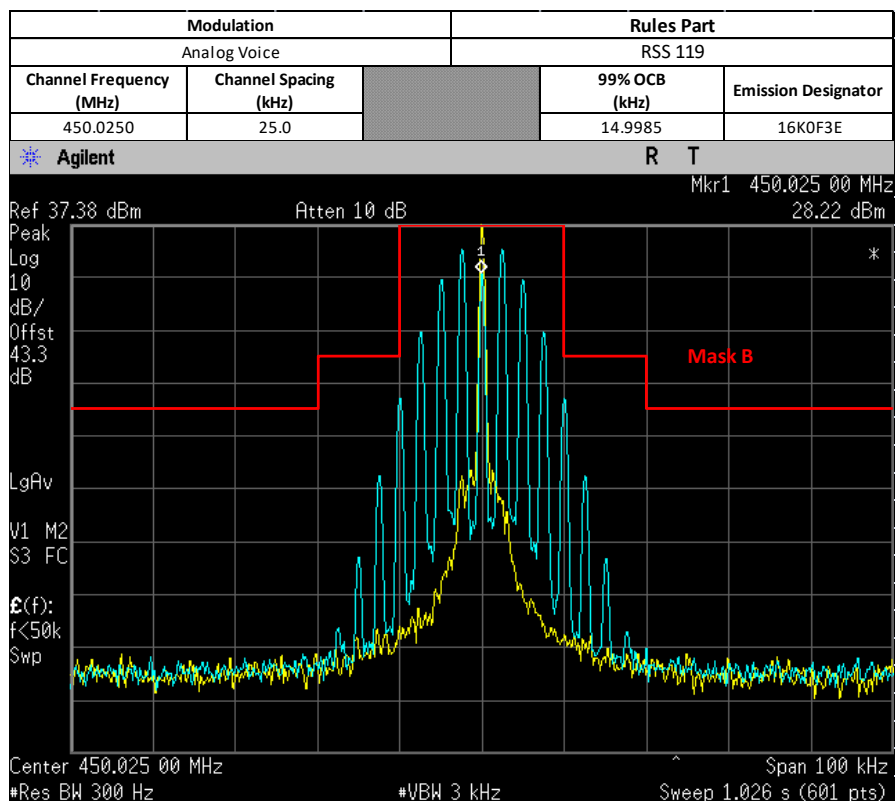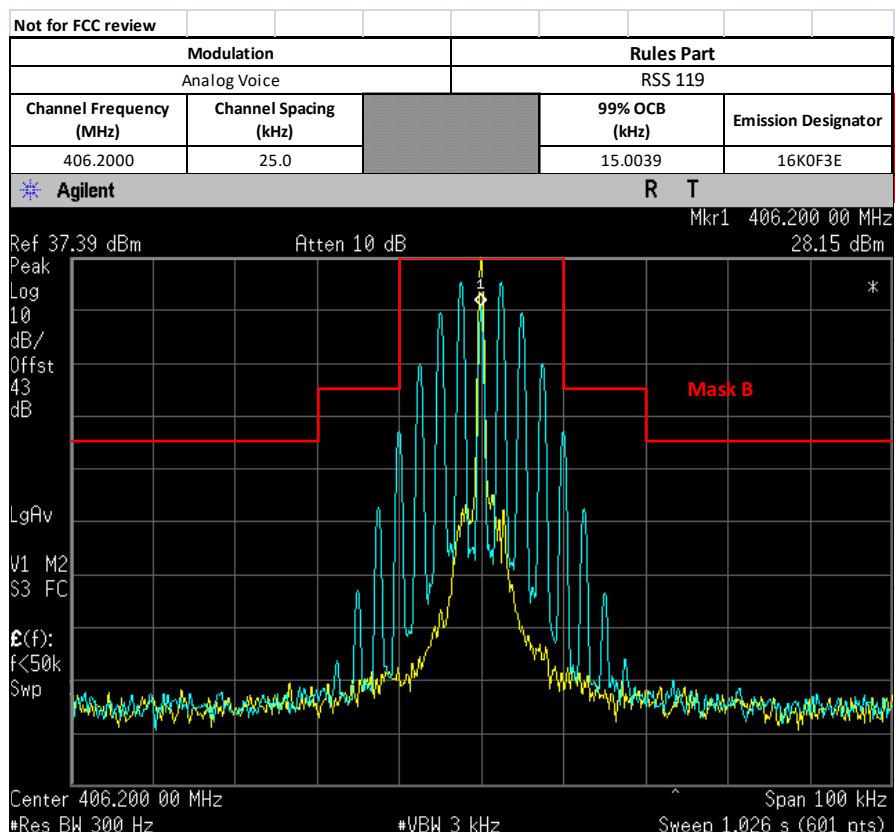

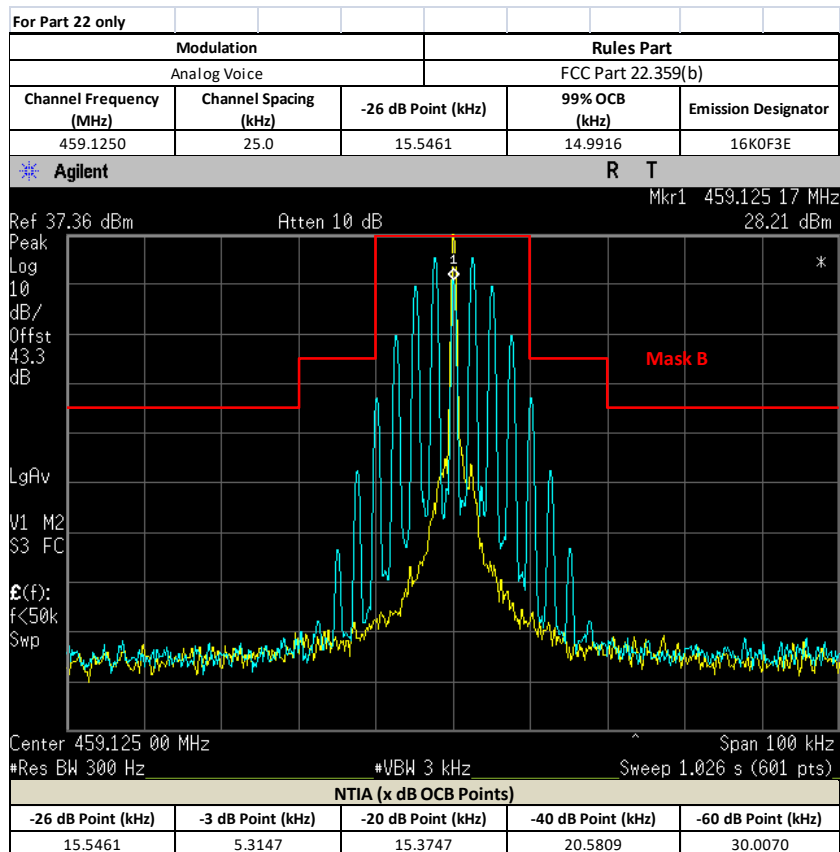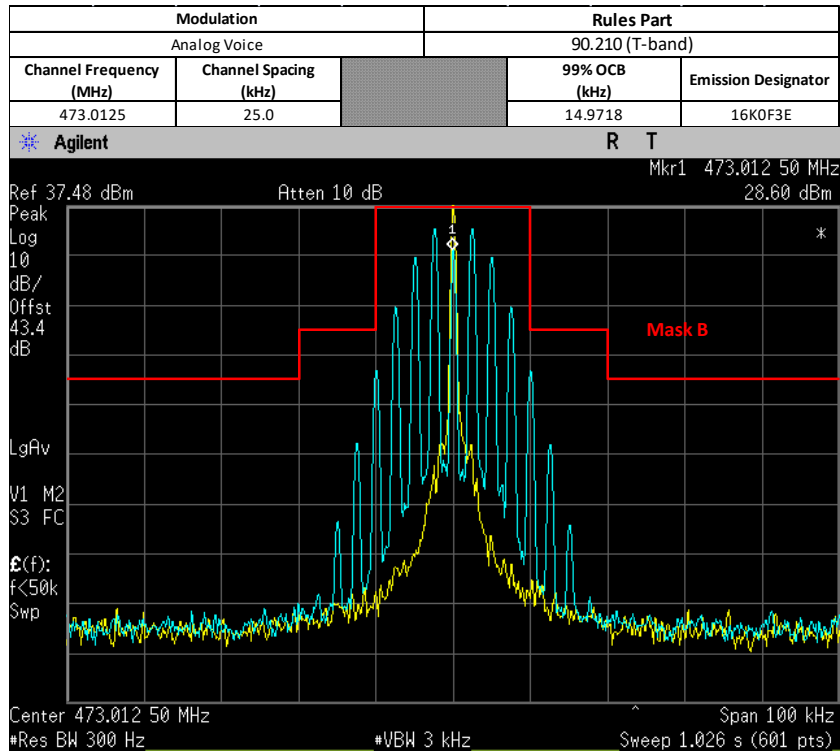

6.5.3. Test Setup (Digital)

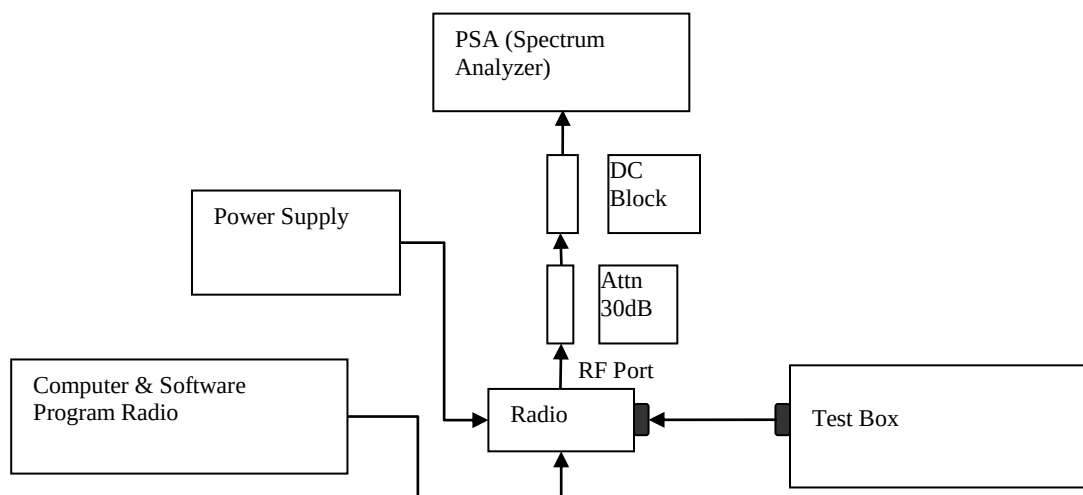



- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.



* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.



*Note:



- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.



6.5.4. Test Result (Digital)

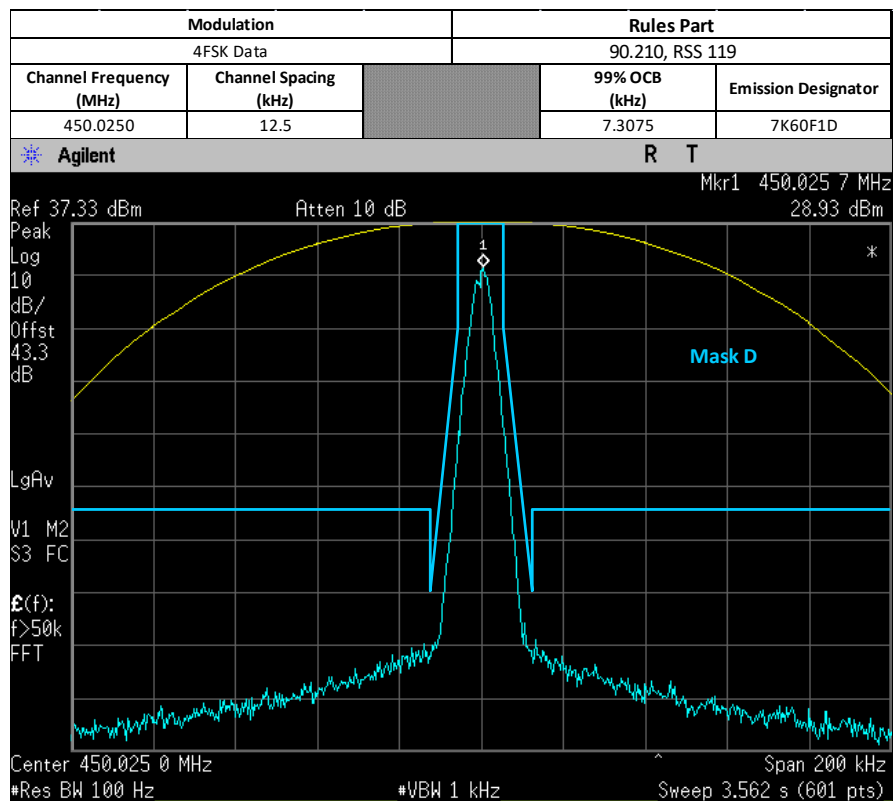
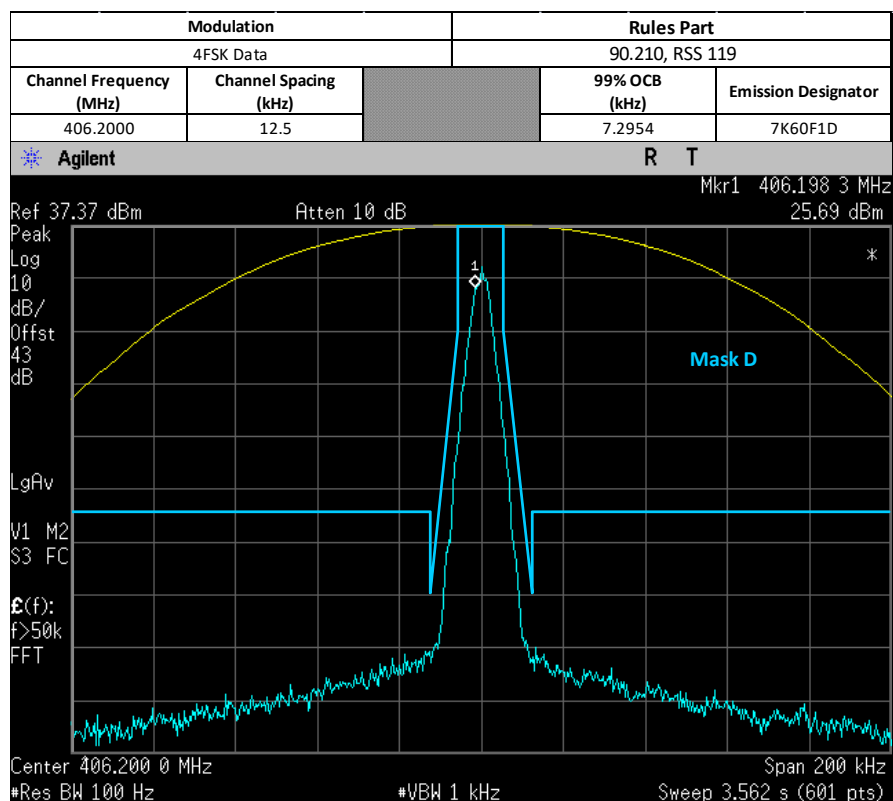


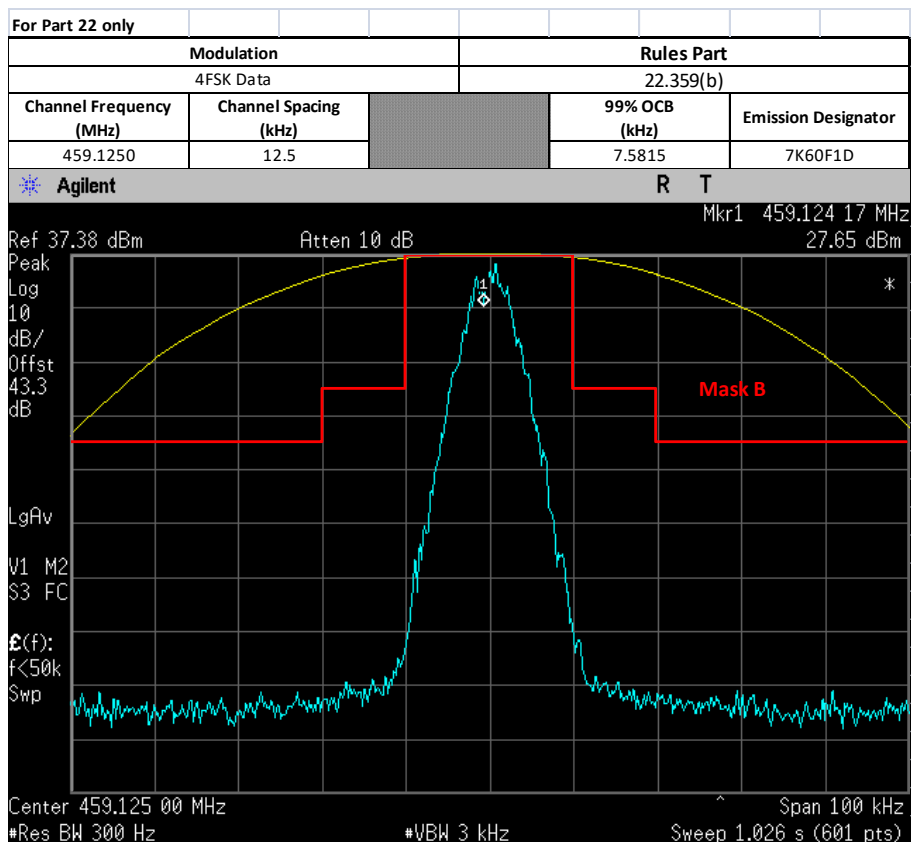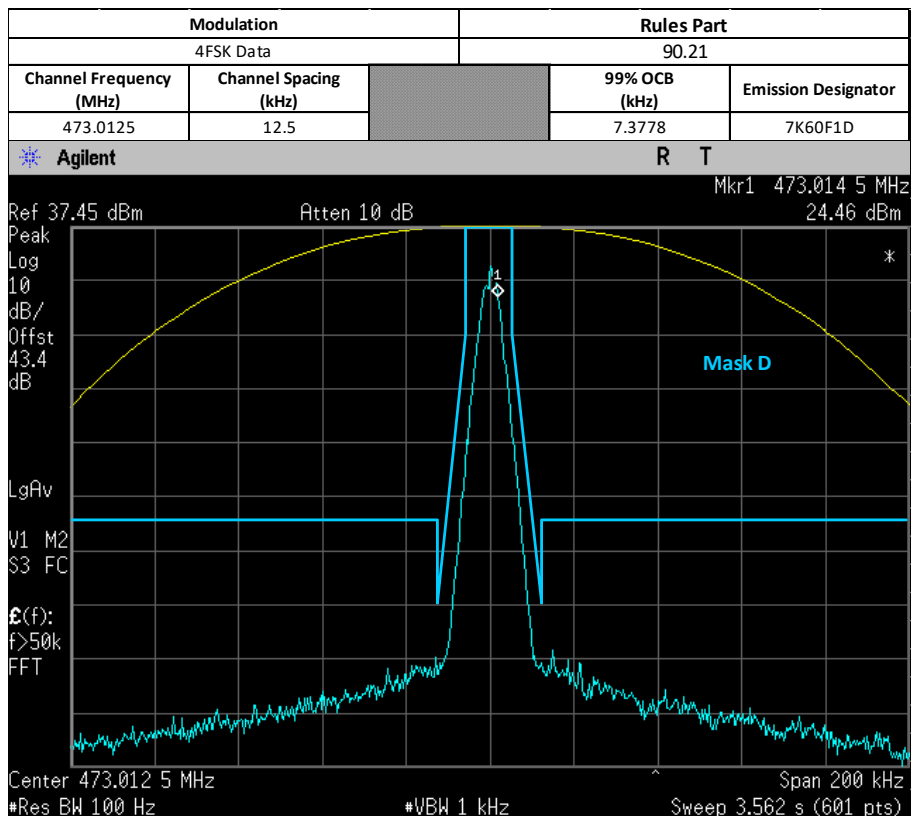

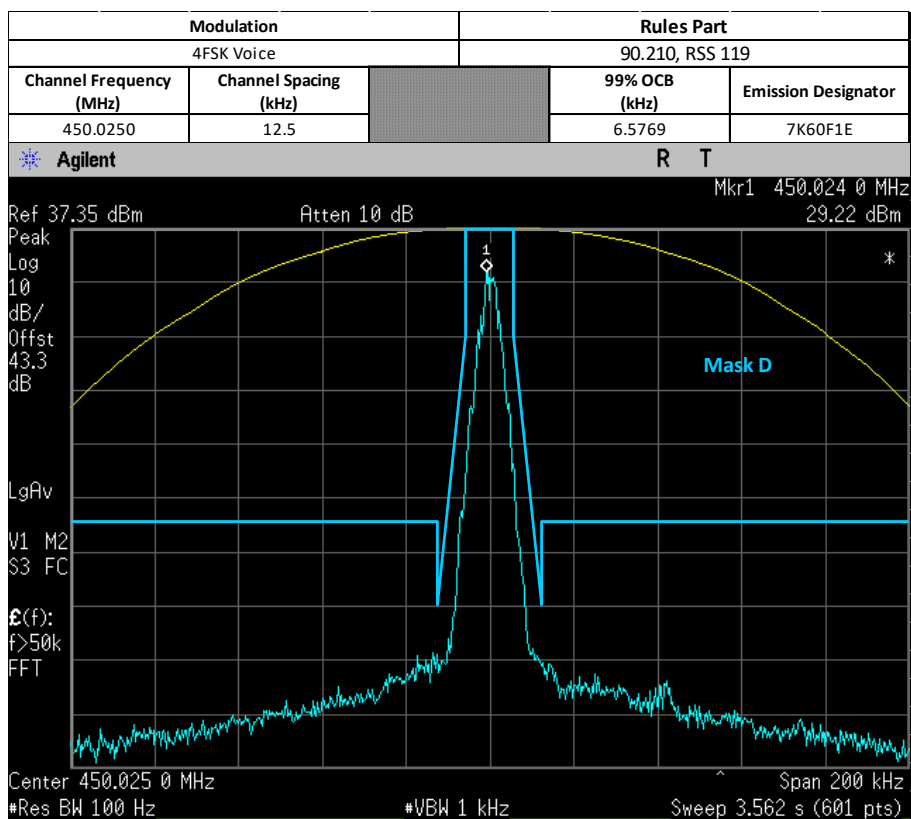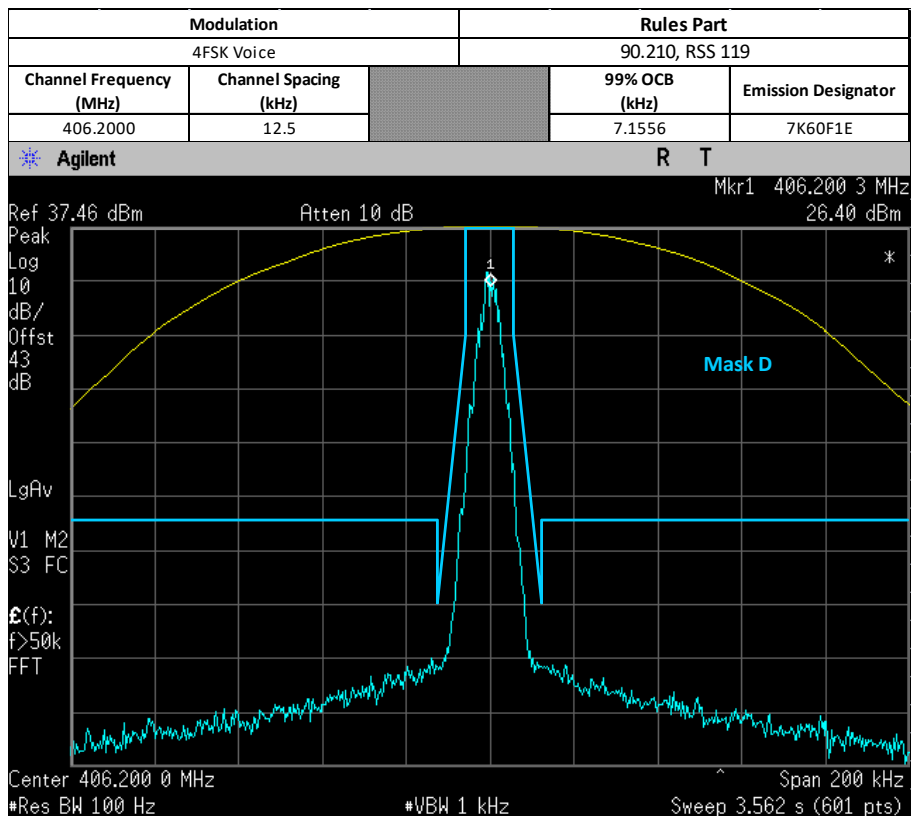

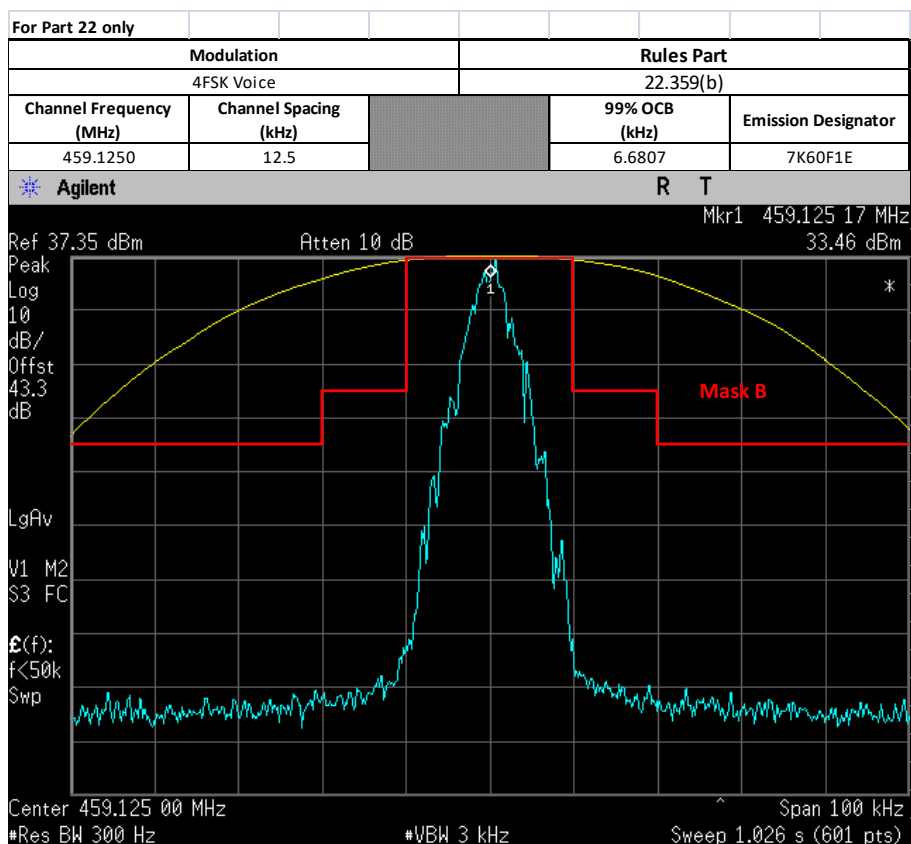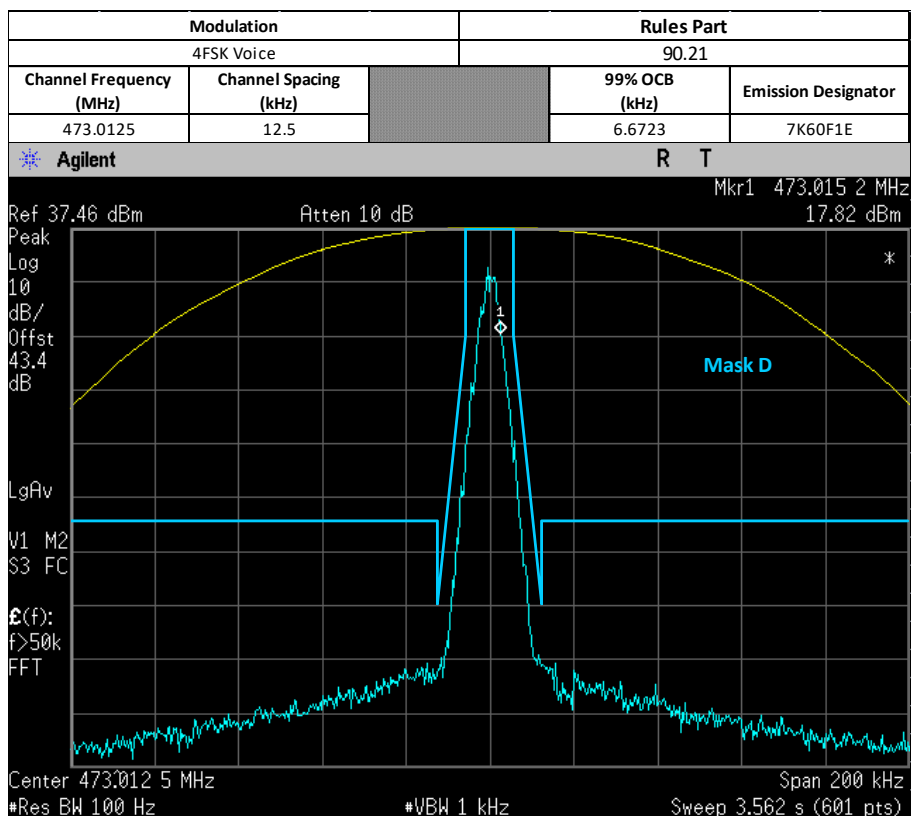

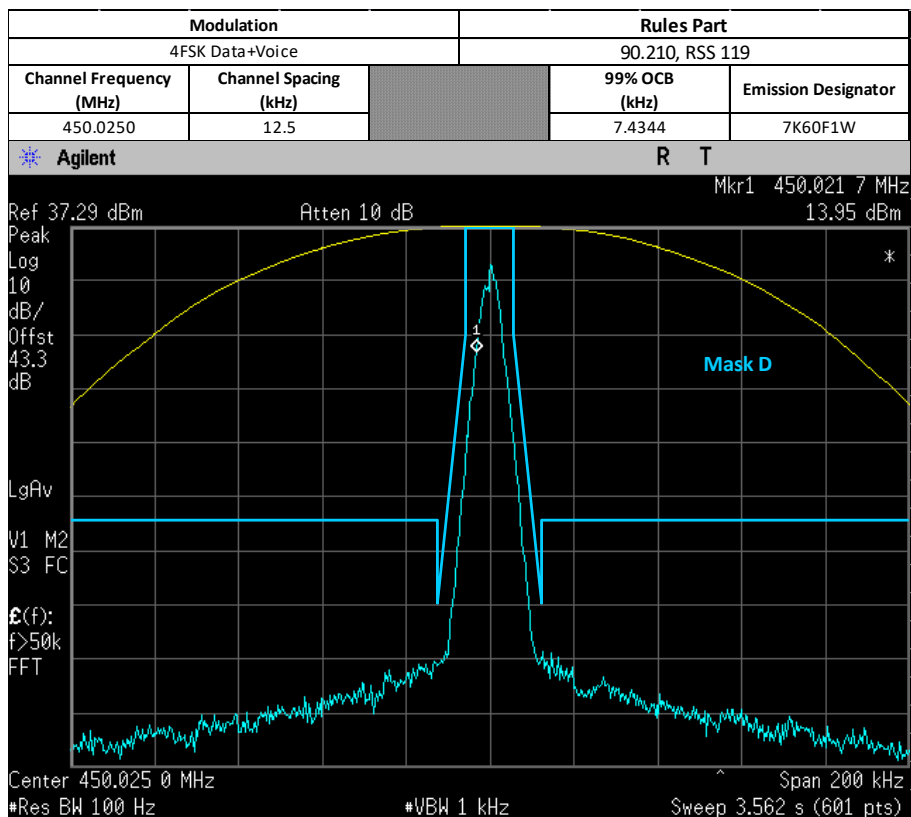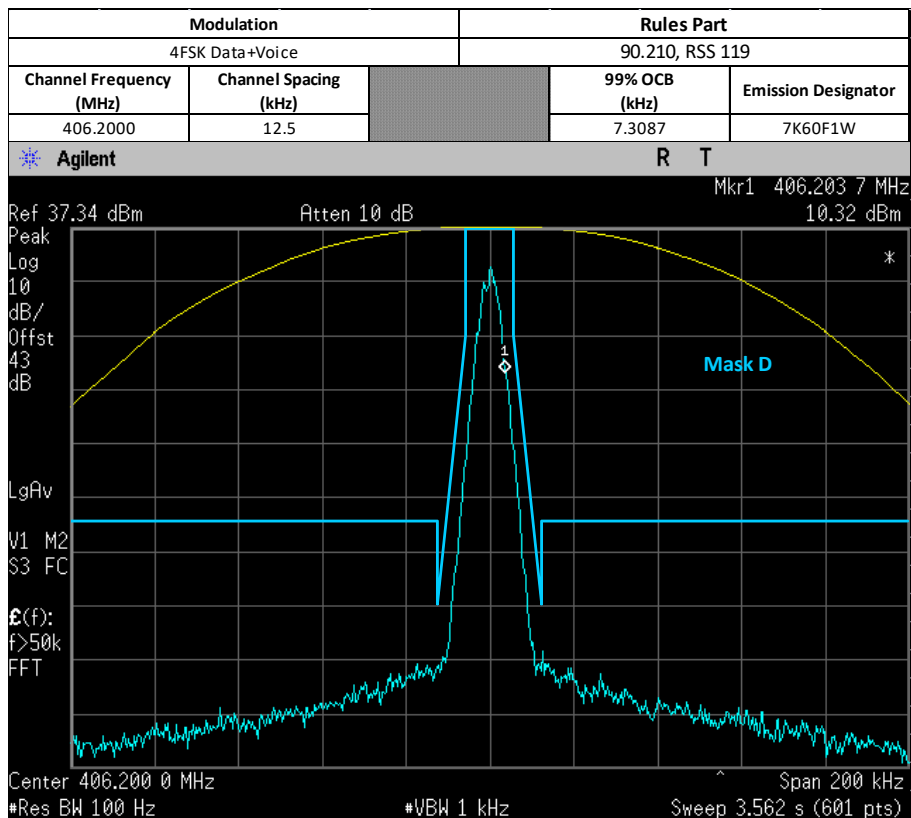

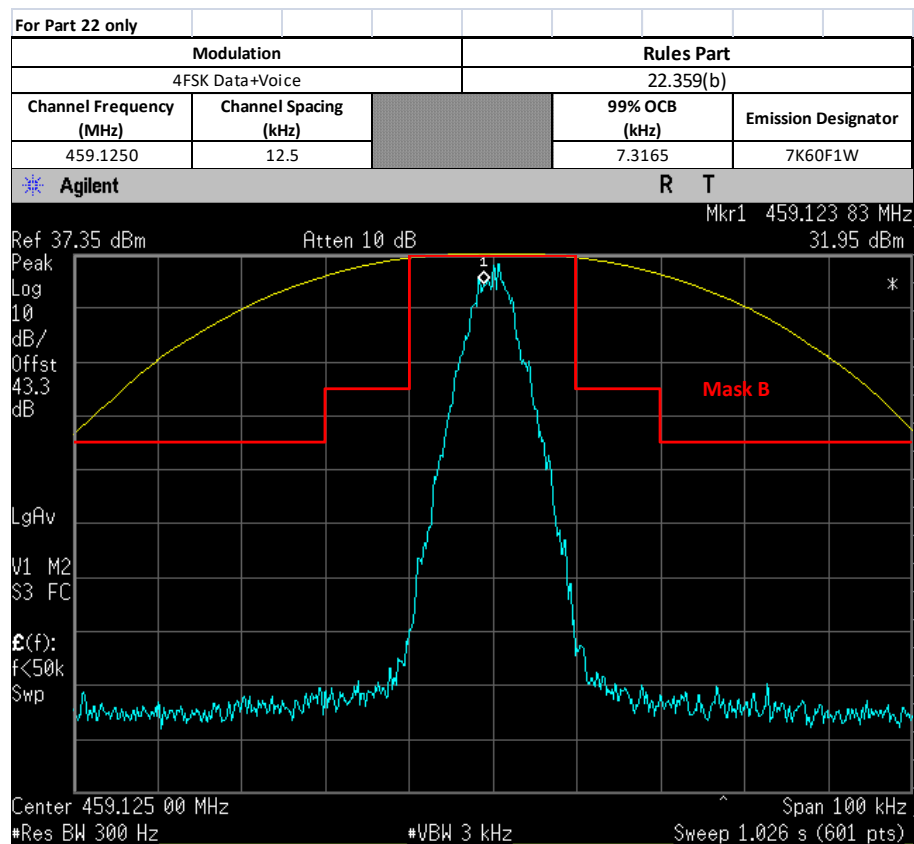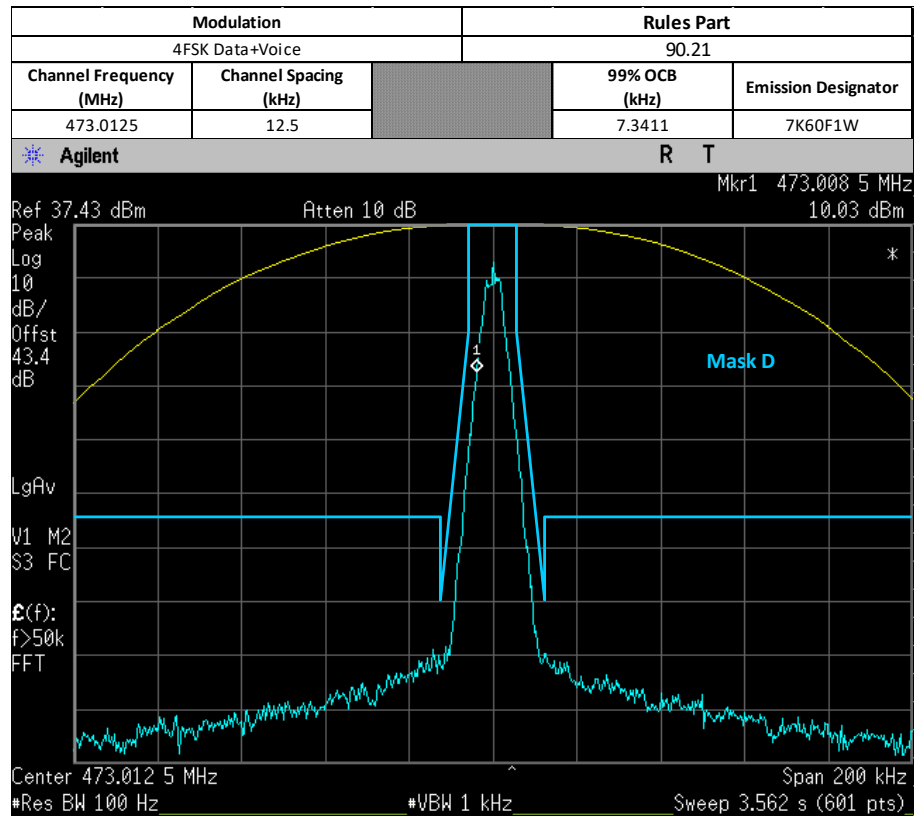


6.5.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.6. Band Edge Conducted Spurious Emission (Part 22)

6.6.1. Test Setup (Analog)


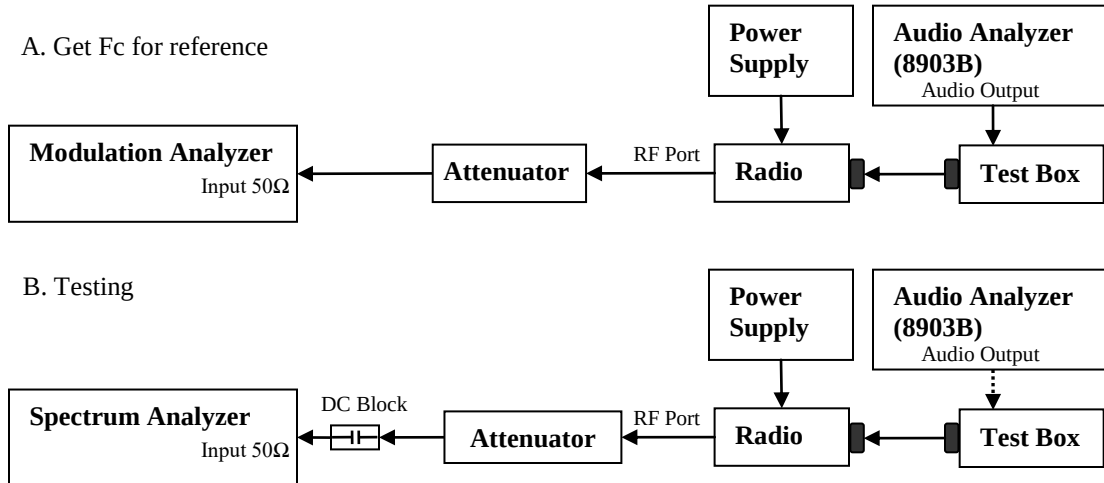




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.6.2. Test Result (Analog)

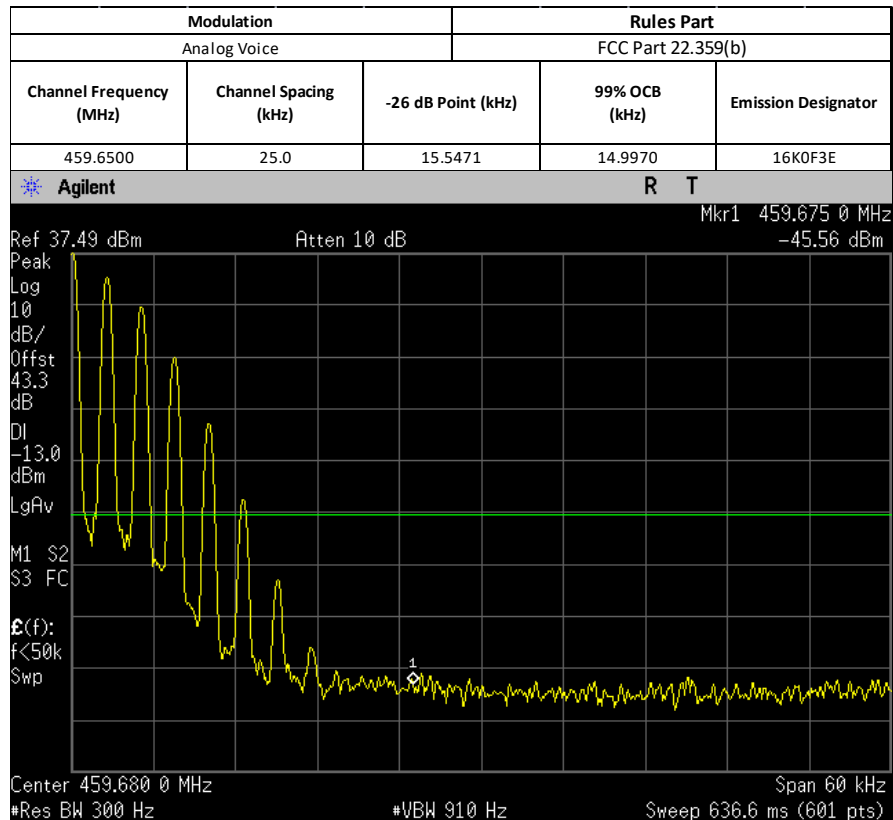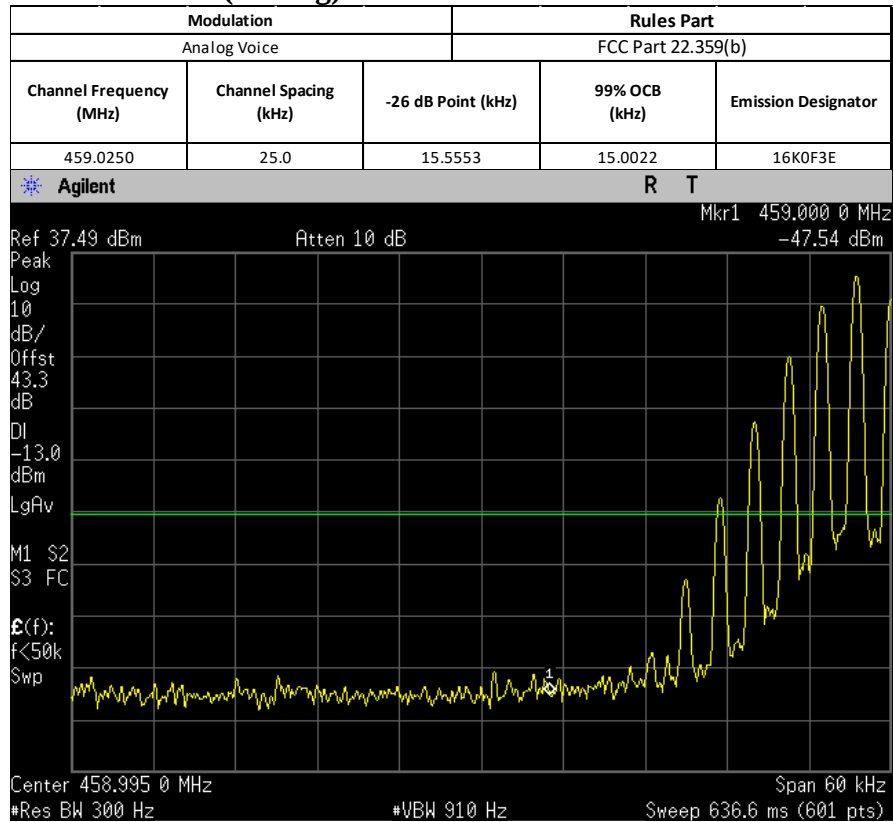

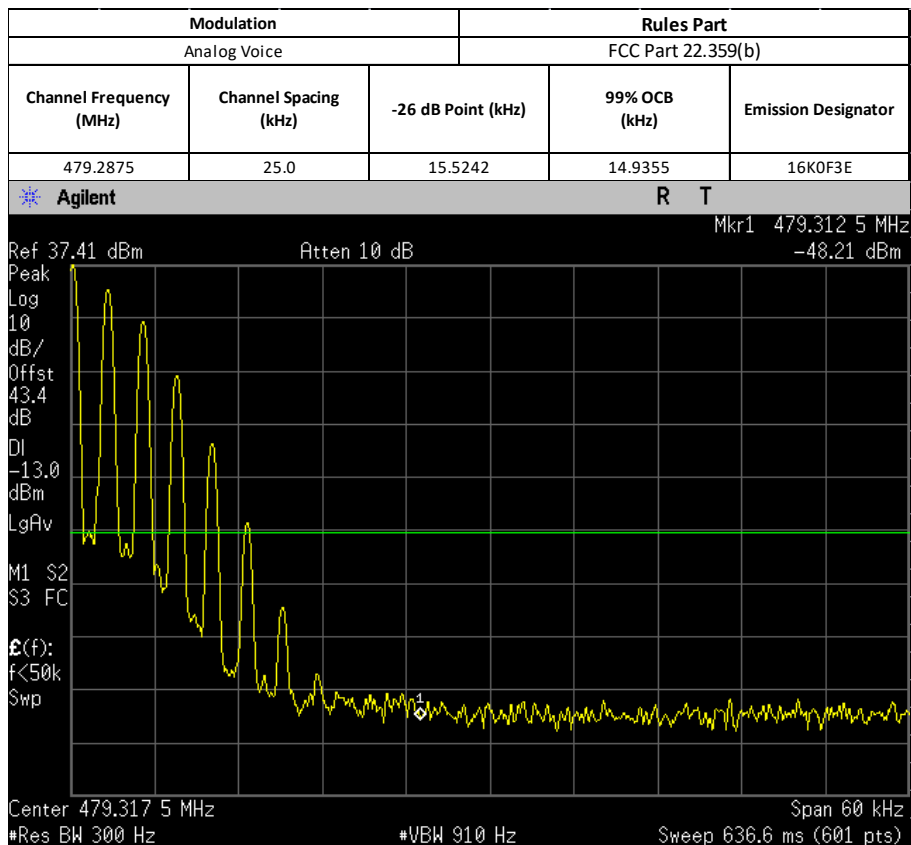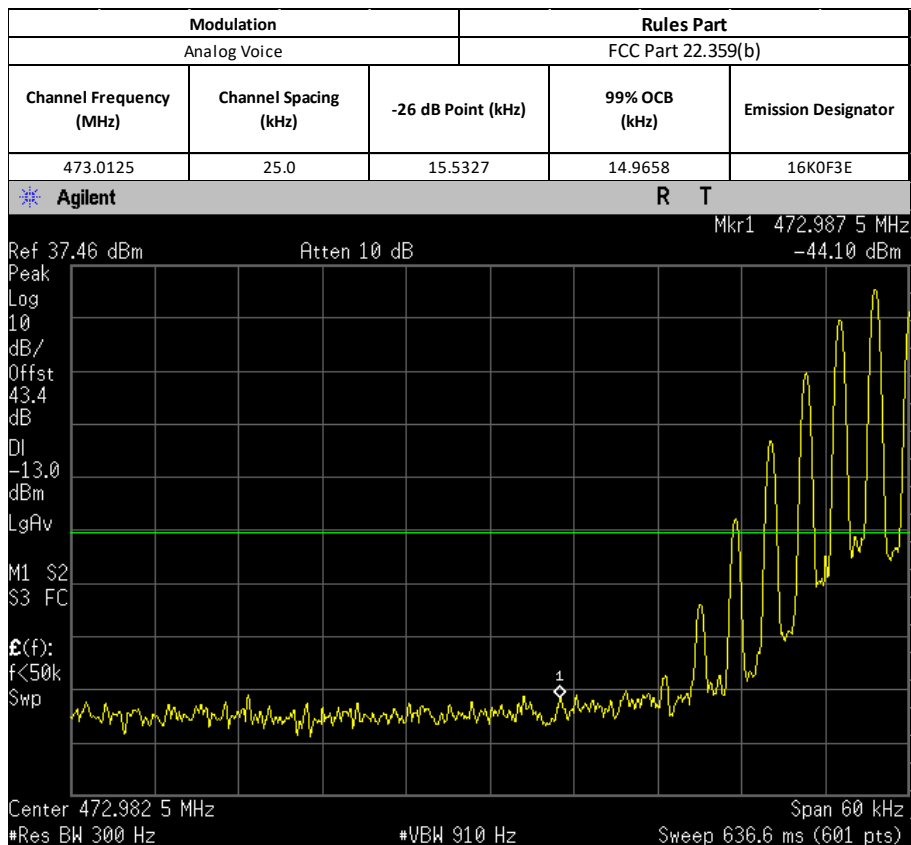

6.6.3. Test Setup (Digital)


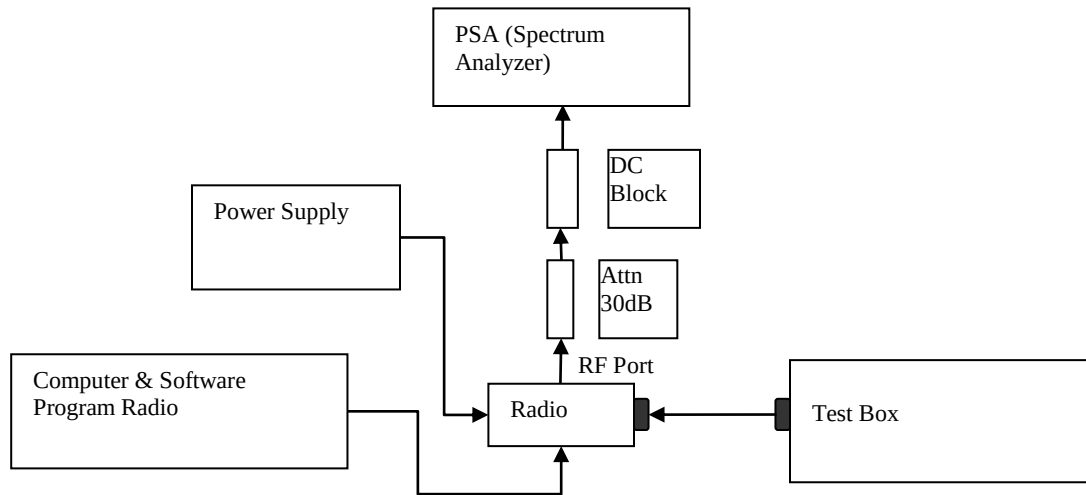




- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.



***Note:**



- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)

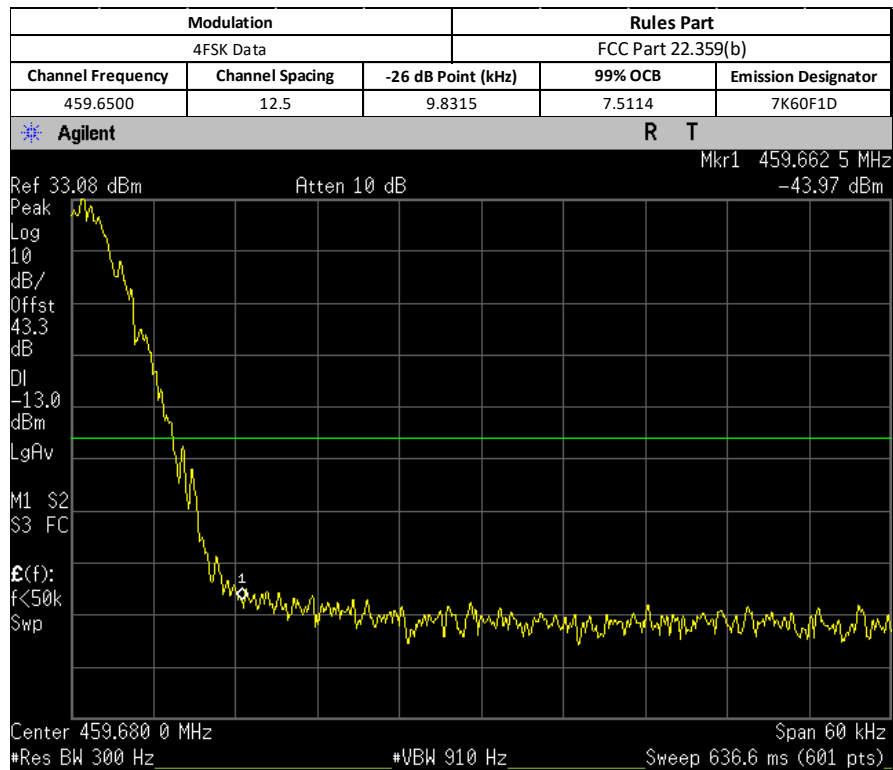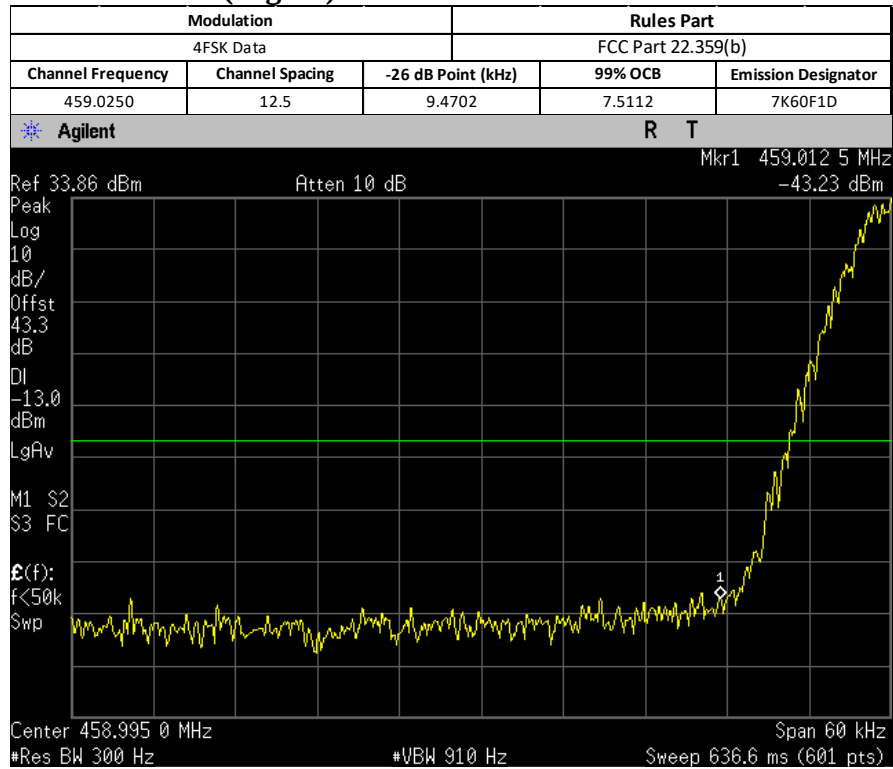

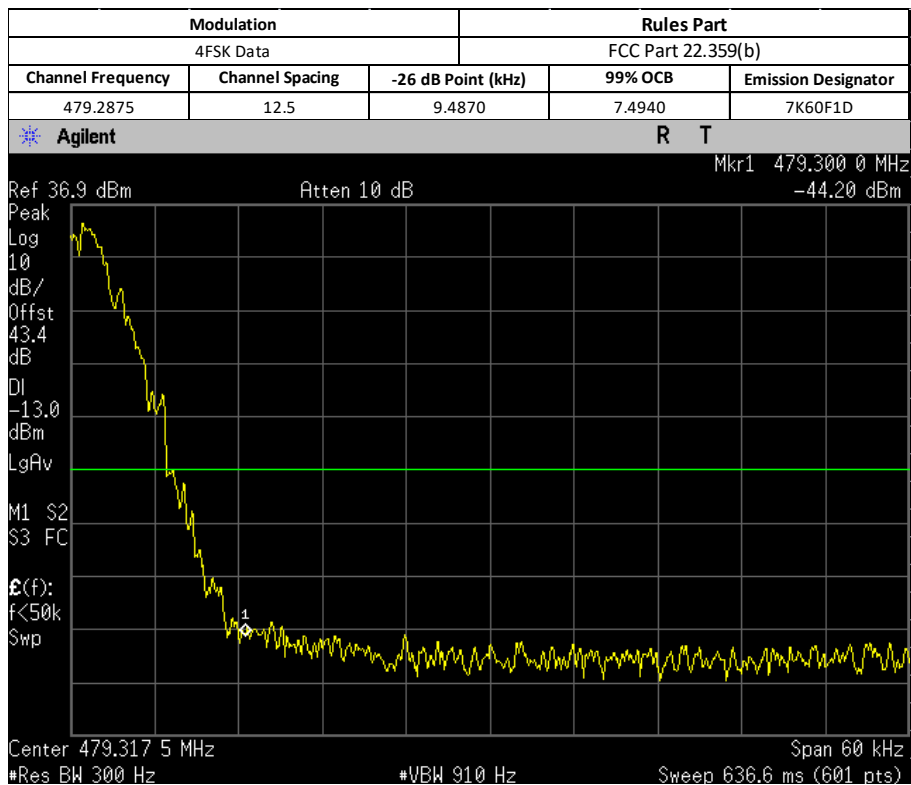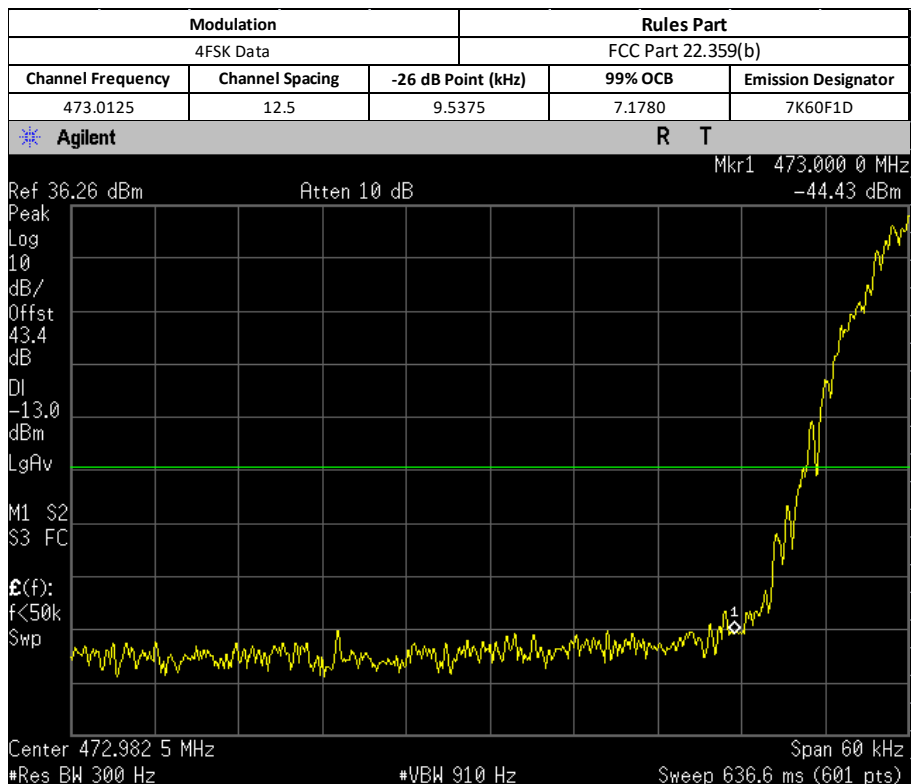

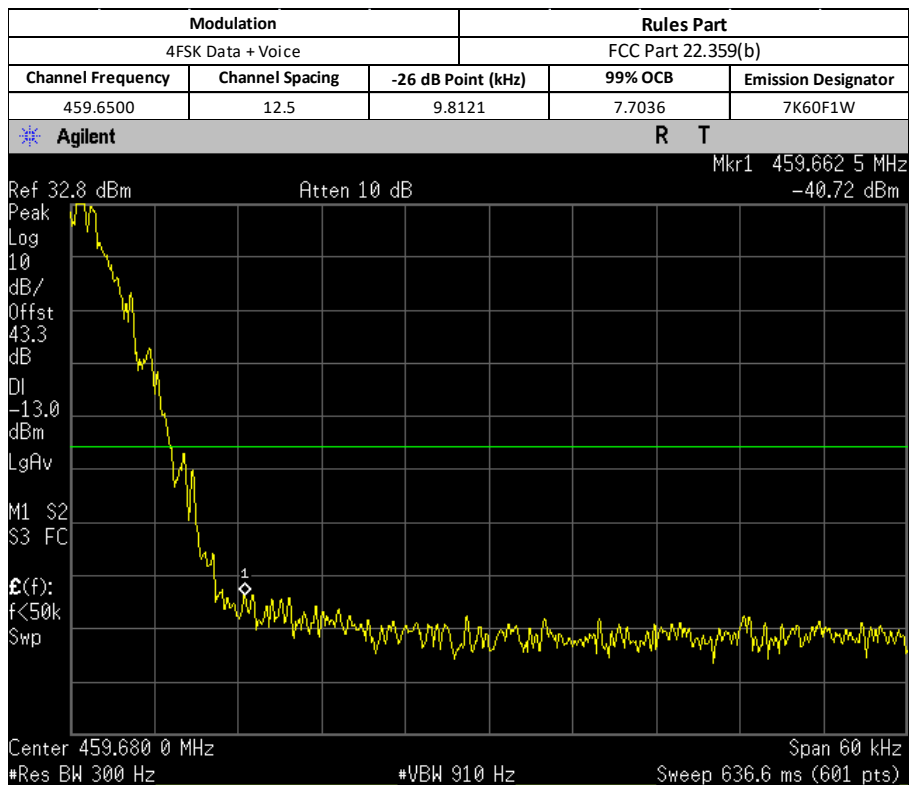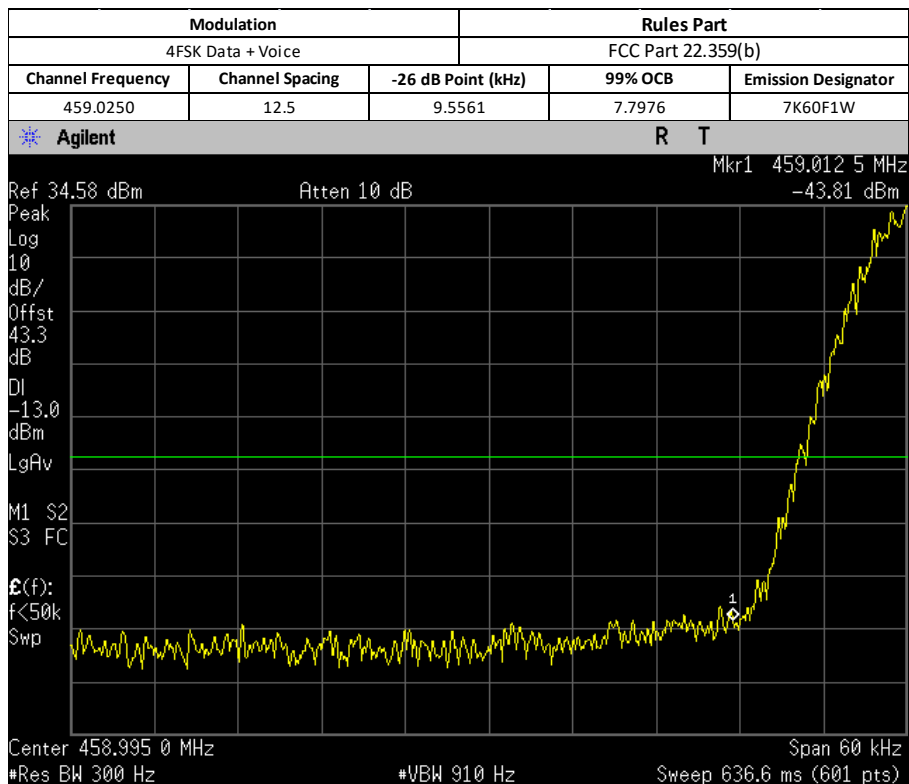

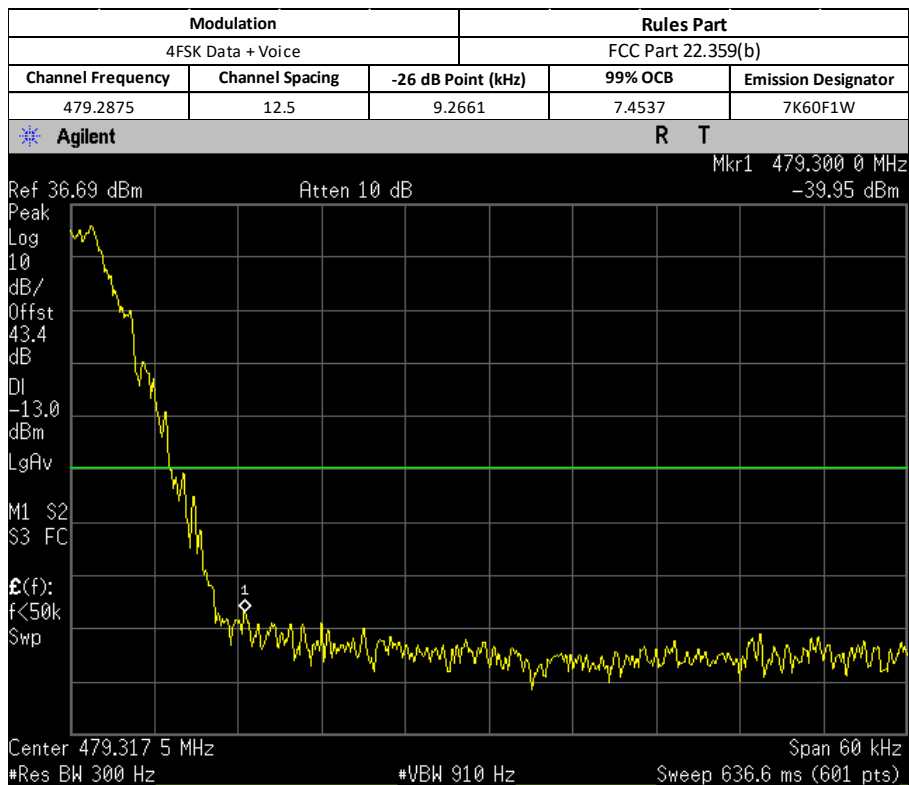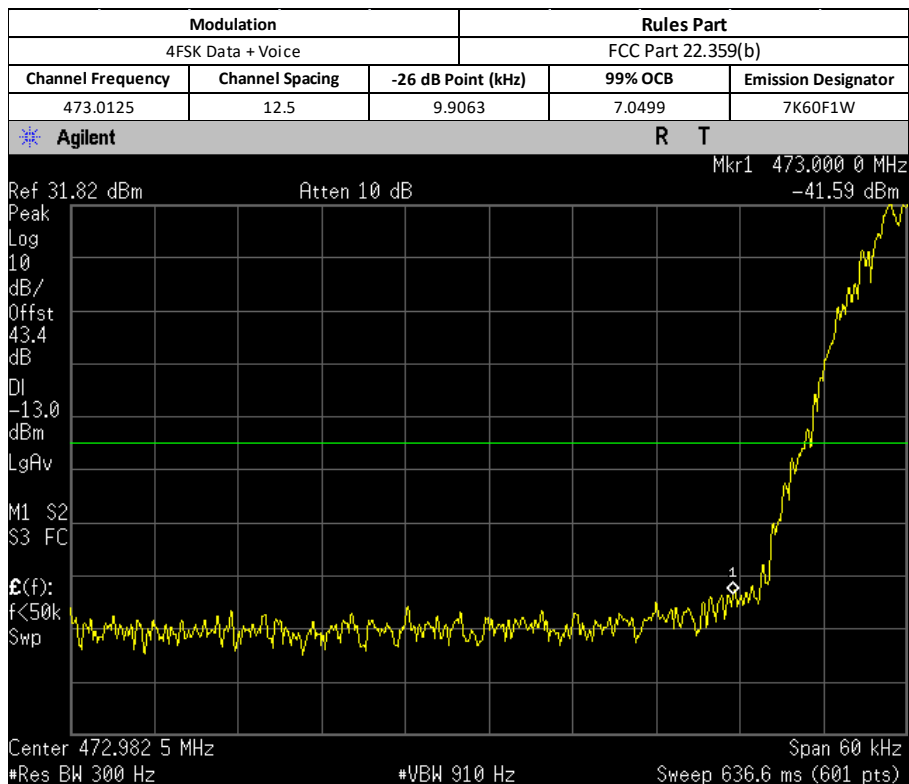


6.6.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.



6.7. Transient Frequency Behavior



6.7.1. Test Setup

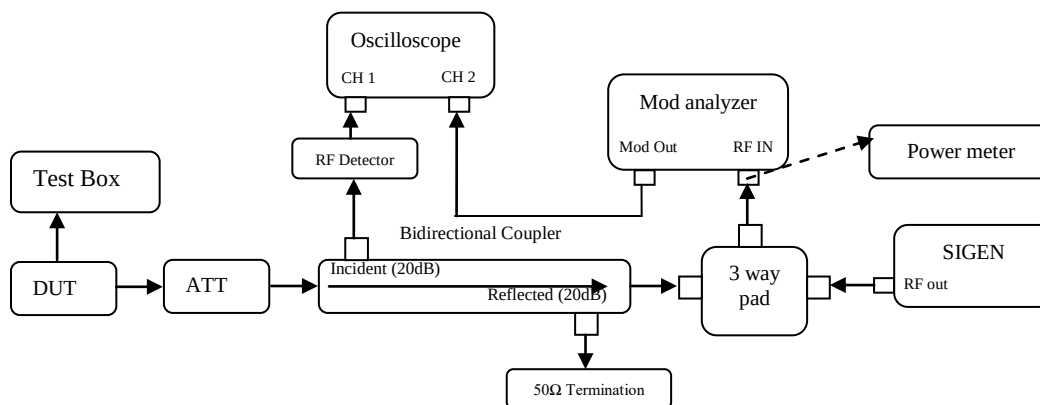

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Siggen with the assigned center frequency, internal 1 kHz FM tone.
 FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
 Analog 12.5 kHz Channel Spacing = 12.5 kHz
 C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.7.2. Test Result

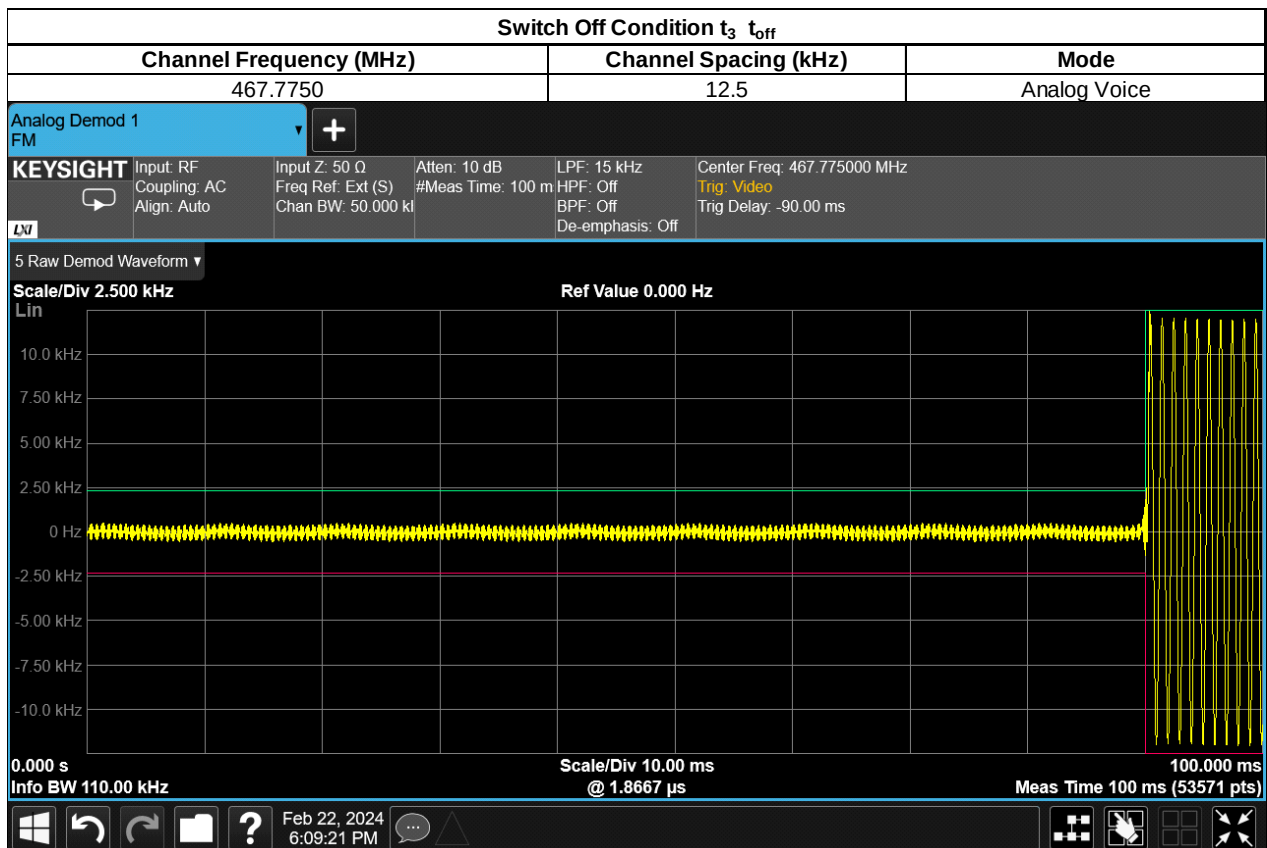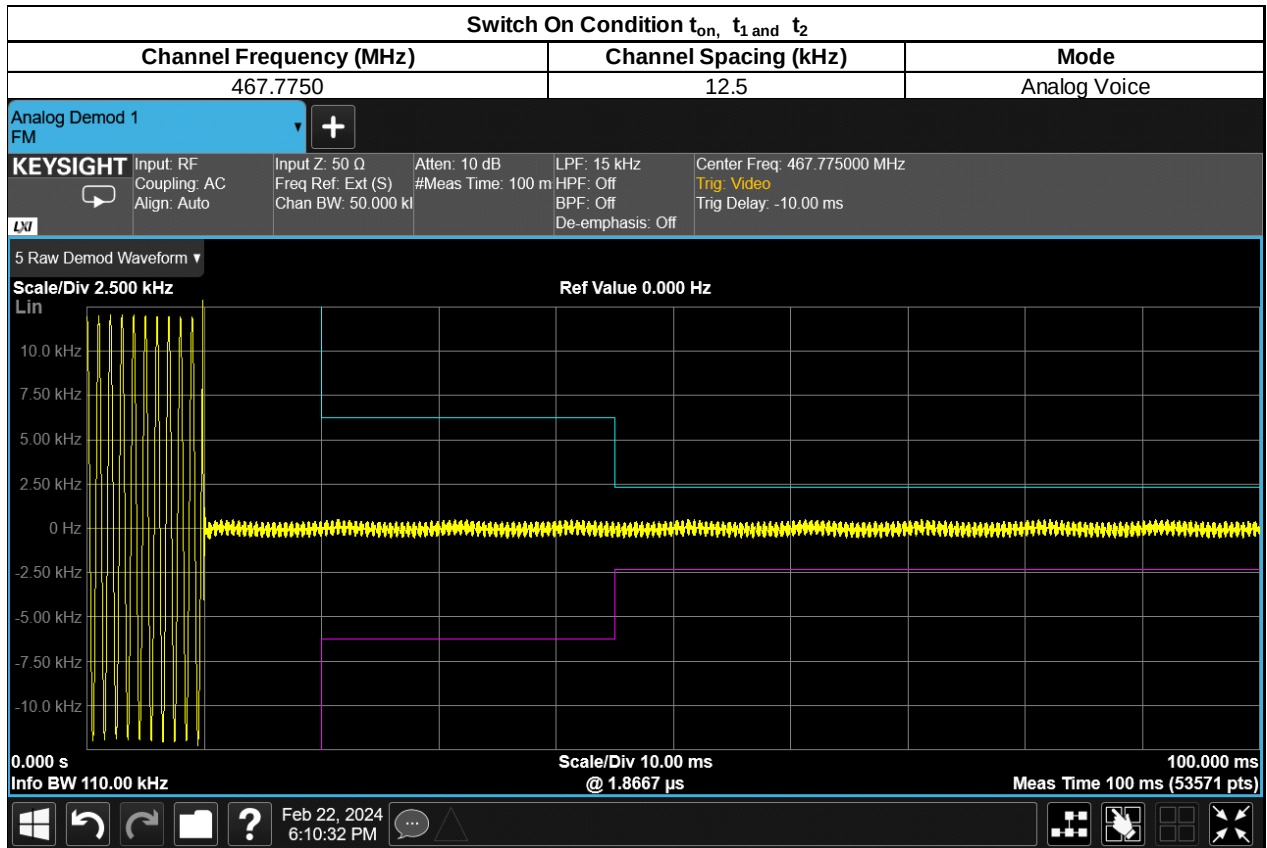

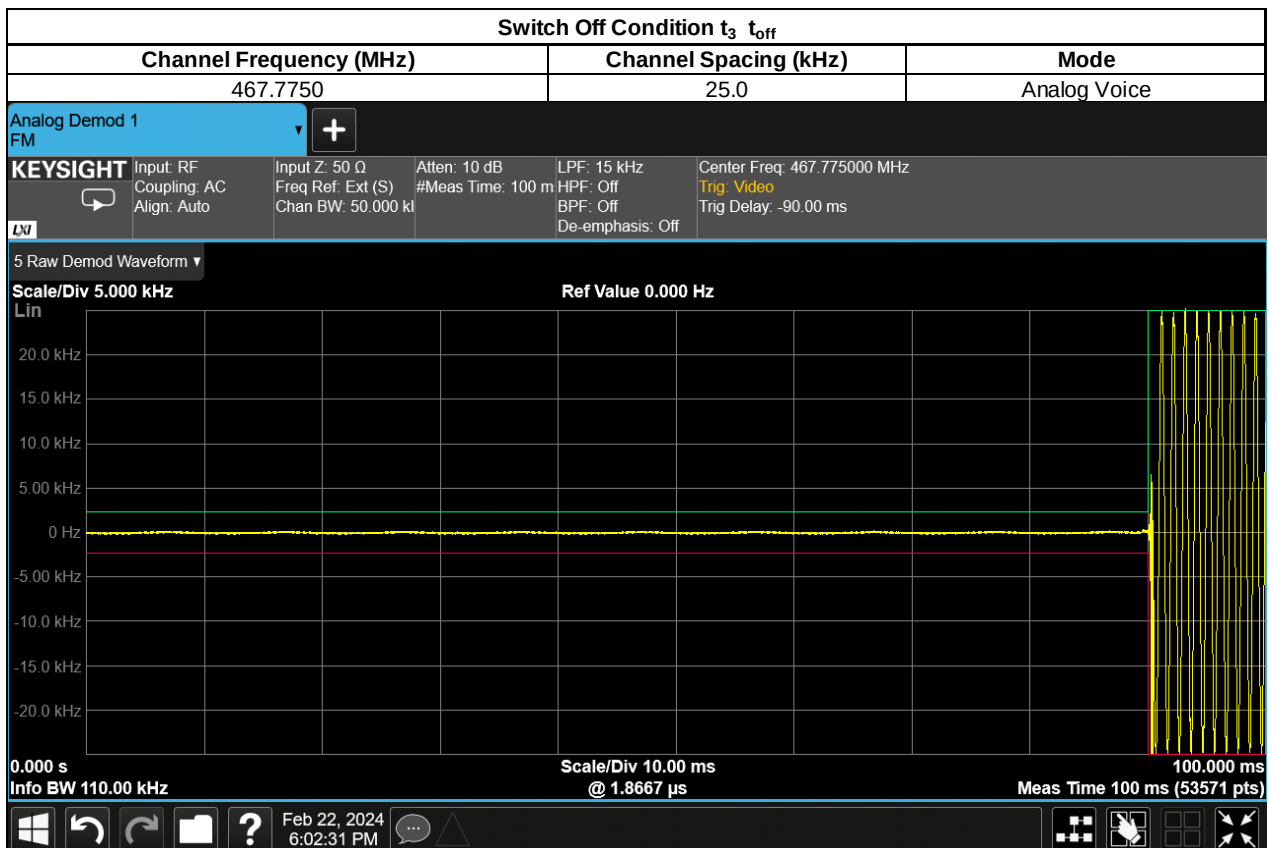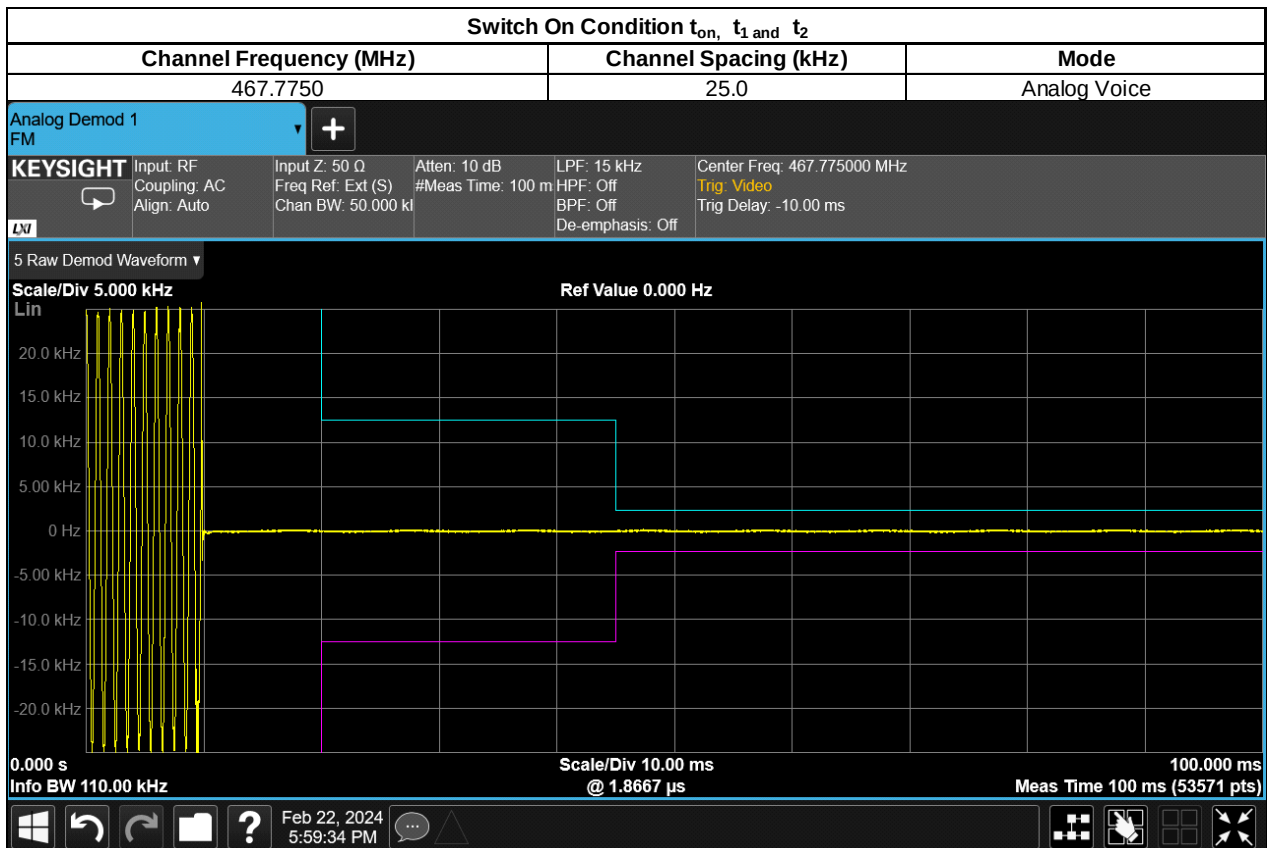

6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.8. Adjacent Channel Power


6.8.1. Test Setup (Analog)

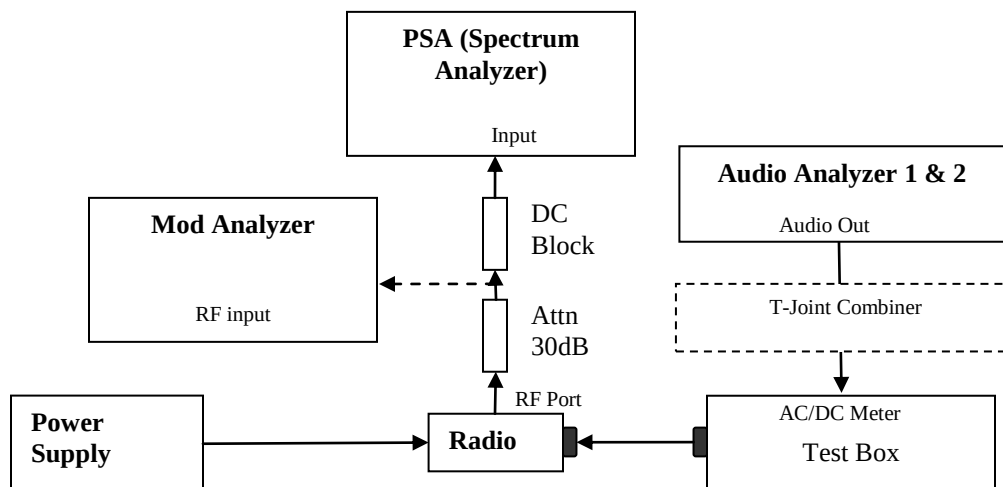

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.2. Test Result Not Applicable

6.8.3. Test Setup (Digital)

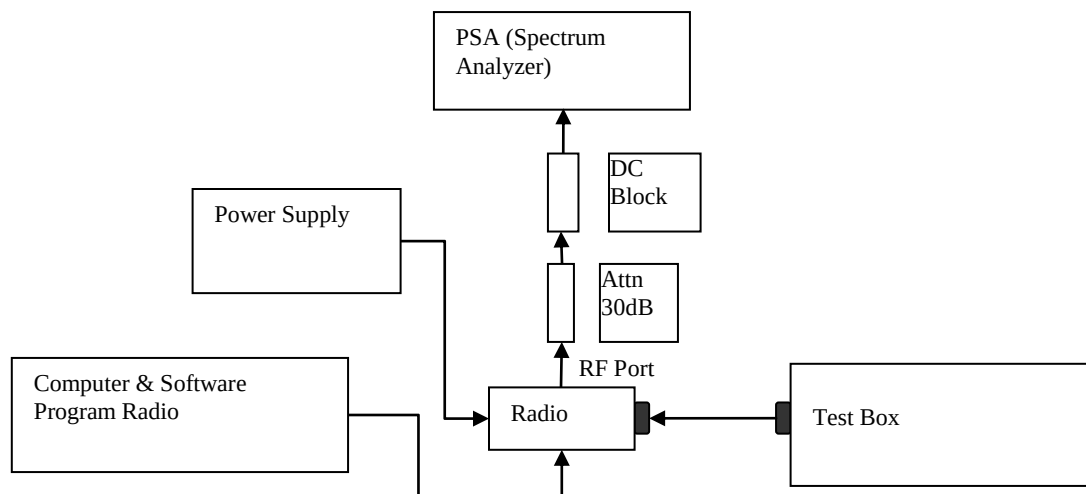

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.4. Test Result

Not Applicable

6.8.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.9. Conducted Spurious Emission


6.9.1. Test Setup

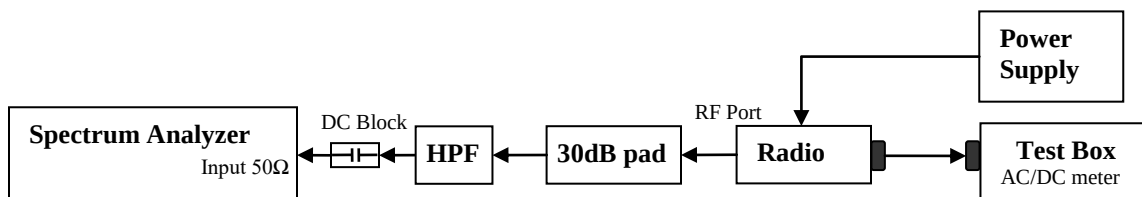

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


6.9.2. Test Result (Analog)

Analog: 400.0125 MHz, 25 kHz Channel Spacing, Max Power

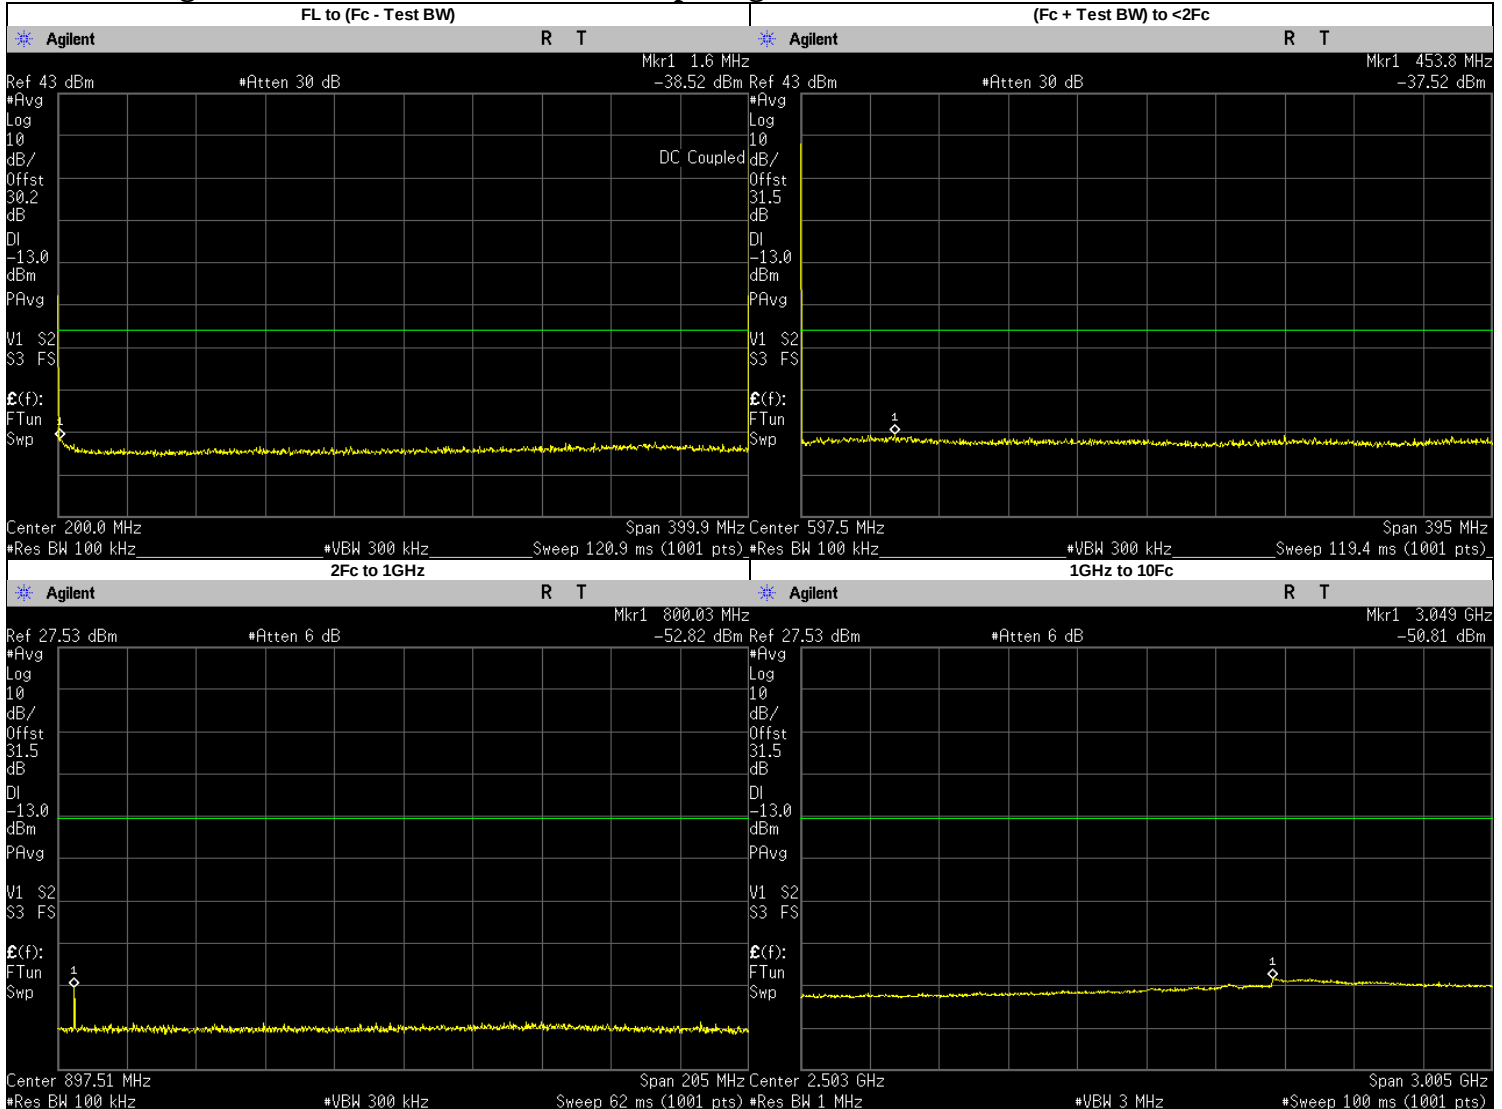


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.600	-38.5160	-13	PASS
(Fc + Test BW) to <2Fc	453.782	-37.5200	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	800.025	-52.8200	-13	PASS
	3049.495	-50.8100	-13	PASS
	1200.037	-54.6510	-13	PASS
	1600.050	-54.6871	-13	PASS
	2000.062	-53.9322	-13	PASS
	2400.075	-54.1066	-13	PASS
	2800.088	-52.9022	-13	PASS
	3200.100	-51.1360	-13	PASS
	3600.113	-52.1240	-13	PASS
	4000.125	-52.4940	-13	PASS

Analog: 406.2000 MHz, 25 kHz Channel Spacing, Max Power

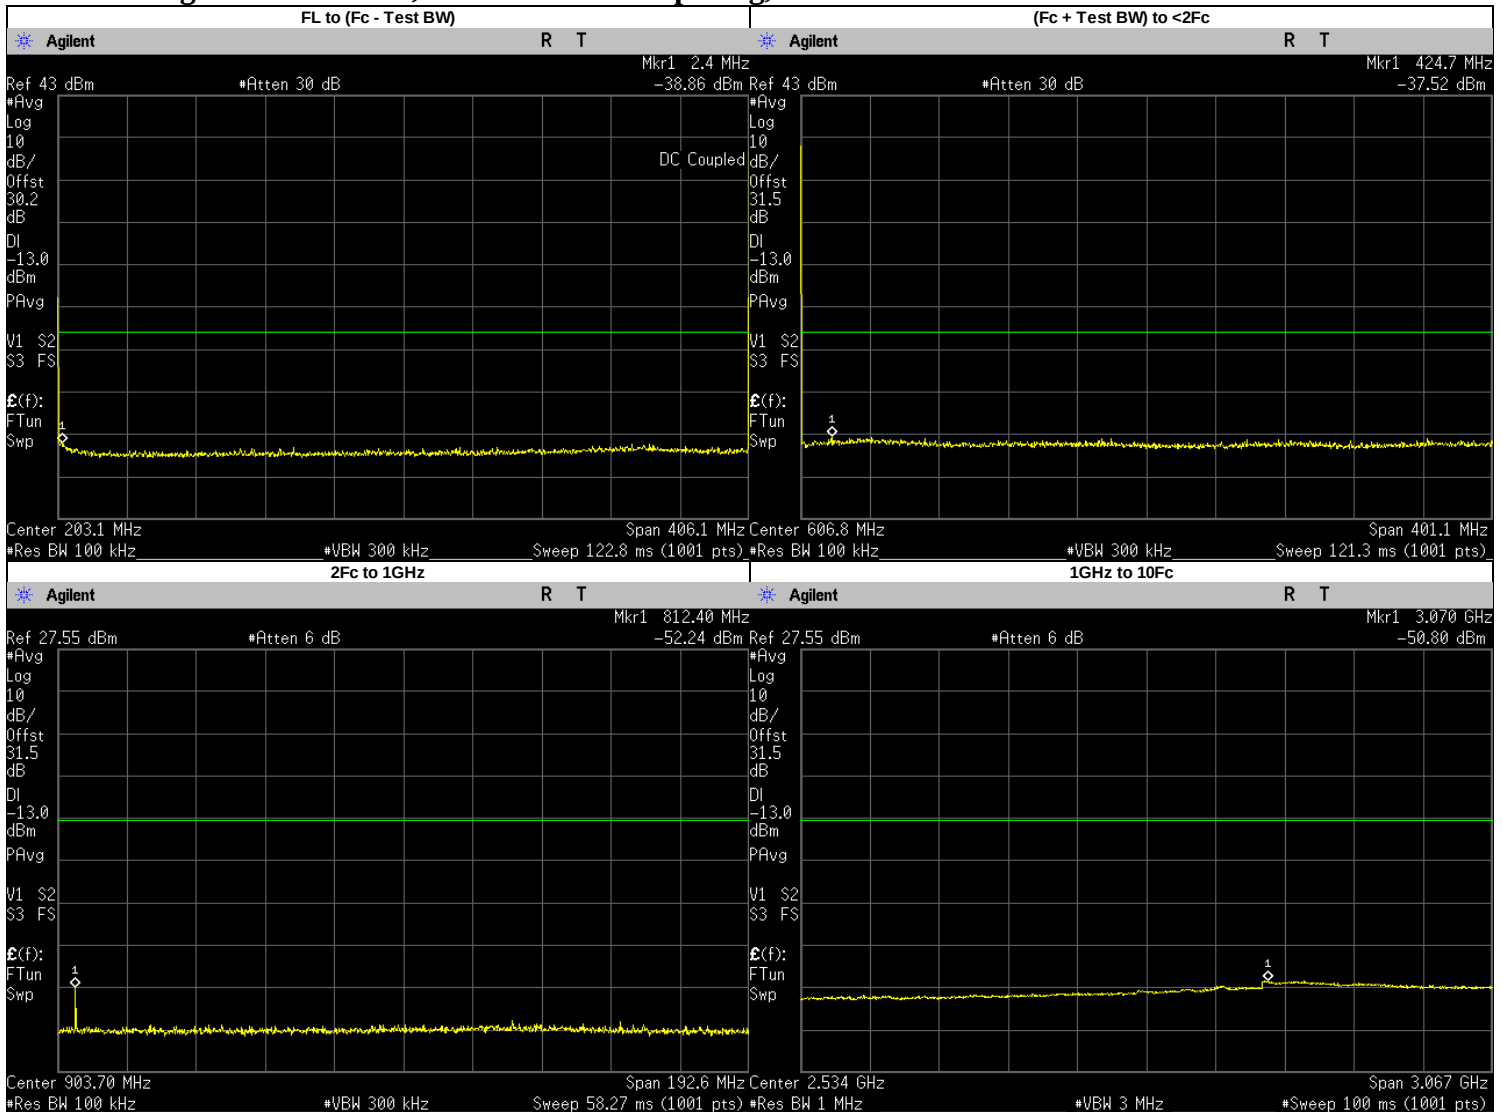

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.2000	-38.9160	-13	PASS
(Fc + Test BW) to <2Fc	470.9953	-37.5500	-13	PASS
2Fc to 1GHz	899.9827	-55.8900	-13	PASS
1GHz to 10Fc	900.0500	-56.0365	-13	PASS
	3054.0770	-50.5100	-13	PASS
	1350.0750	-52.9995	-13	PASS
	1800.1000	-54.5464	-13	PASS
	2250.1250	-53.9891	-13	PASS
	2700.1500	-53.0957	-13	PASS
	3150.1750	-51.1229	-13	PASS
	3600.2000	-52.0729	-13	PASS
	4050.2250	-52.3935	-13	PASS
	4500.2500	-52.5512	-13	PASS

Analog: 450.0250 MHz, 25 kHz Channel Spacing, Max Power

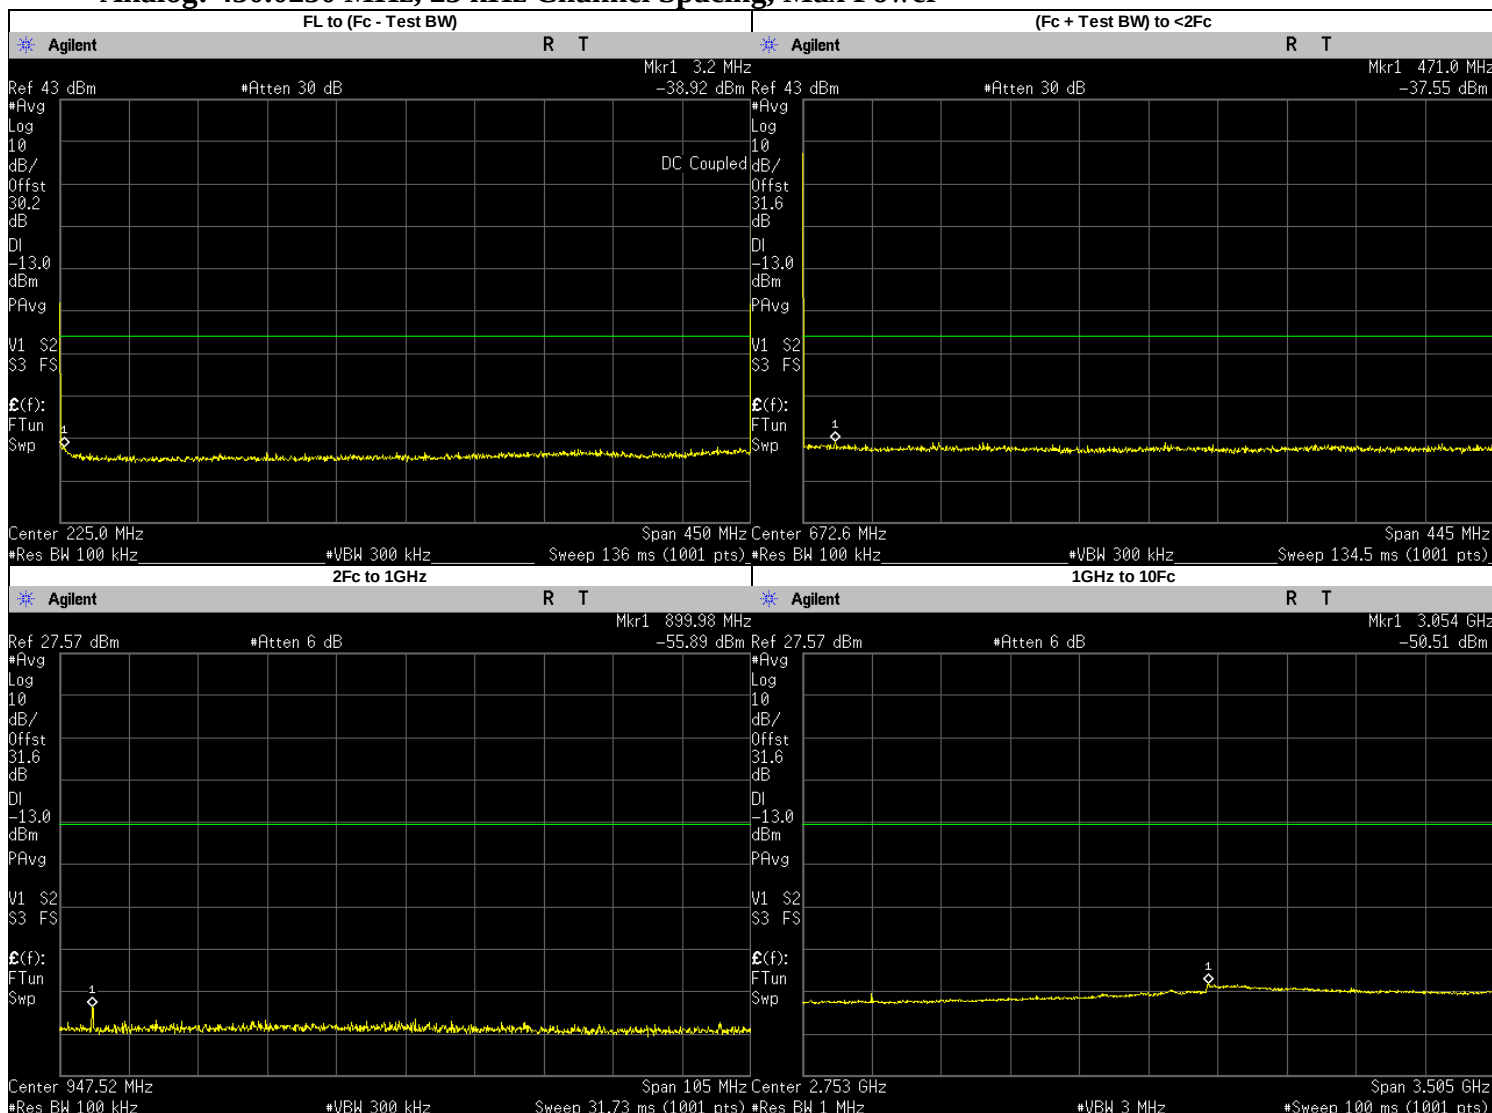

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.2000	-38.9160	-13	PASS
(Fc + Test BW) to <2Fc	470.9953	-37.5500	-13	PASS
2Fc to 1GHz	899.9827	-55.8900	-13	PASS
1GHz to 10Fc	900.0500	-56.0365	-13	PASS
	3054.0770	-50.5100	-13	PASS
	1350.0750	-52.9995	-13	PASS
	1800.1000	-54.5464	-13	PASS
	2250.1250	-53.9891	-13	PASS
	2700.1500	-53.0957	-13	PASS
	3150.1750	-51.1229	-13	PASS
	3600.2000	-52.0729	-13	PASS
	4050.2250	-52.3935	-13	PASS
	4500.2500	-52.5512	-13	PASS

The figure displays four Agilent spectrum analyzer screenshots arranged in a 2x2 grid, showing noise floor measurements. Each plot includes the following information:

- Top Header:** Agilent logo, frequency range, and reference level (Ref).
- Left Panel:** Settings for Attenuation (*Atten), Resolution Bandwidth (*Res BW), Video Bandwidth (*VBW), and Sweep time.
- Right Panel:** Settings for Attenuation (*Atten), Resolution Bandwidth (*Res BW), Video Bandwidth (*VBW), and Sweep time.
- Plot Area:** A grid showing the noise floor (yellow line) and a marker (Mkr1) indicating the measured noise level.
- Bottom Panel:** Center frequency, Span, and other measurement parameters.

Top Left Plot (FL to (Fc - Test BW)):

- Ref: 43 dBm
- *Atten: 30 dB
- Mkr1: 1.6 MHz, -38.42 dBm
- Center: 202.5 MHz
- Span: 405 MHz
- *Res BW: 100 kHz
- *VBW: 300 kHz
- Sweep: 122.4 ms (1001 pts)

Top Right Plot ((Fc + Test BW) to <2Fc):

- Ref: 43 dBm
- *Atten: 30 dB
- Mkr1: 430.3 MHz, -37.57 dBm
- Center: 605.1 MHz
- Span: 400 MHz
- *Res BW: 100 kHz
- *VBW: 300 kHz
- Sweep: 120.9 ms (1001 pts)

Bottom Left Plot (2Fc to 1GHz):


- Ref: 27.54 dBm
- *Atten: 6 dB
- Mkr1: 810.05 MHz, -56.12 dBm
- Center: 902.52 MHz
- Span: 194.9 MHz
- *Res BW: 100 kHz
- *VBW: 300 kHz
- Sweep: 58.93 ms (1001 pts)

Bottom Right Plot (1GHz to 10Fc):

- Ref: 27.54 dBm
- *Atten: 6 dB
- Mkr1: 3.053 GHz, -50.50 dBm
- Center: 2.528 GHz
- Span: 3.055 GHz
- *Res BW: 1 MHz
- *VBW: 3 MHz
- Sweep: 100 ms (1001 pts)


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6000	-38.4150	-13	PASS
(Fc + Test BW) to <2Fc	430.2787	-37.5700	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	810.0500	-56.1200	-13	PASS
	3053.1280	-50.5000	-13	PASS
	1215.0750	-55.0635	-13	PASS
	1620.1000	-55.0289	-13	PASS
	2025.1250	-54.3073	-13	PASS
	2430.1500	-53.1104	-13	PASS
	2835.1750	-52.8610	-13	PASS
	3240.2000	-51.4784	-13	PASS
	3645.2250	-52.2952	-13	PASS
	4050.2500	-52.5272	-13	PASS

Analog: 459.1250 MHz, 25 kHz Channel Spacing, Max Power

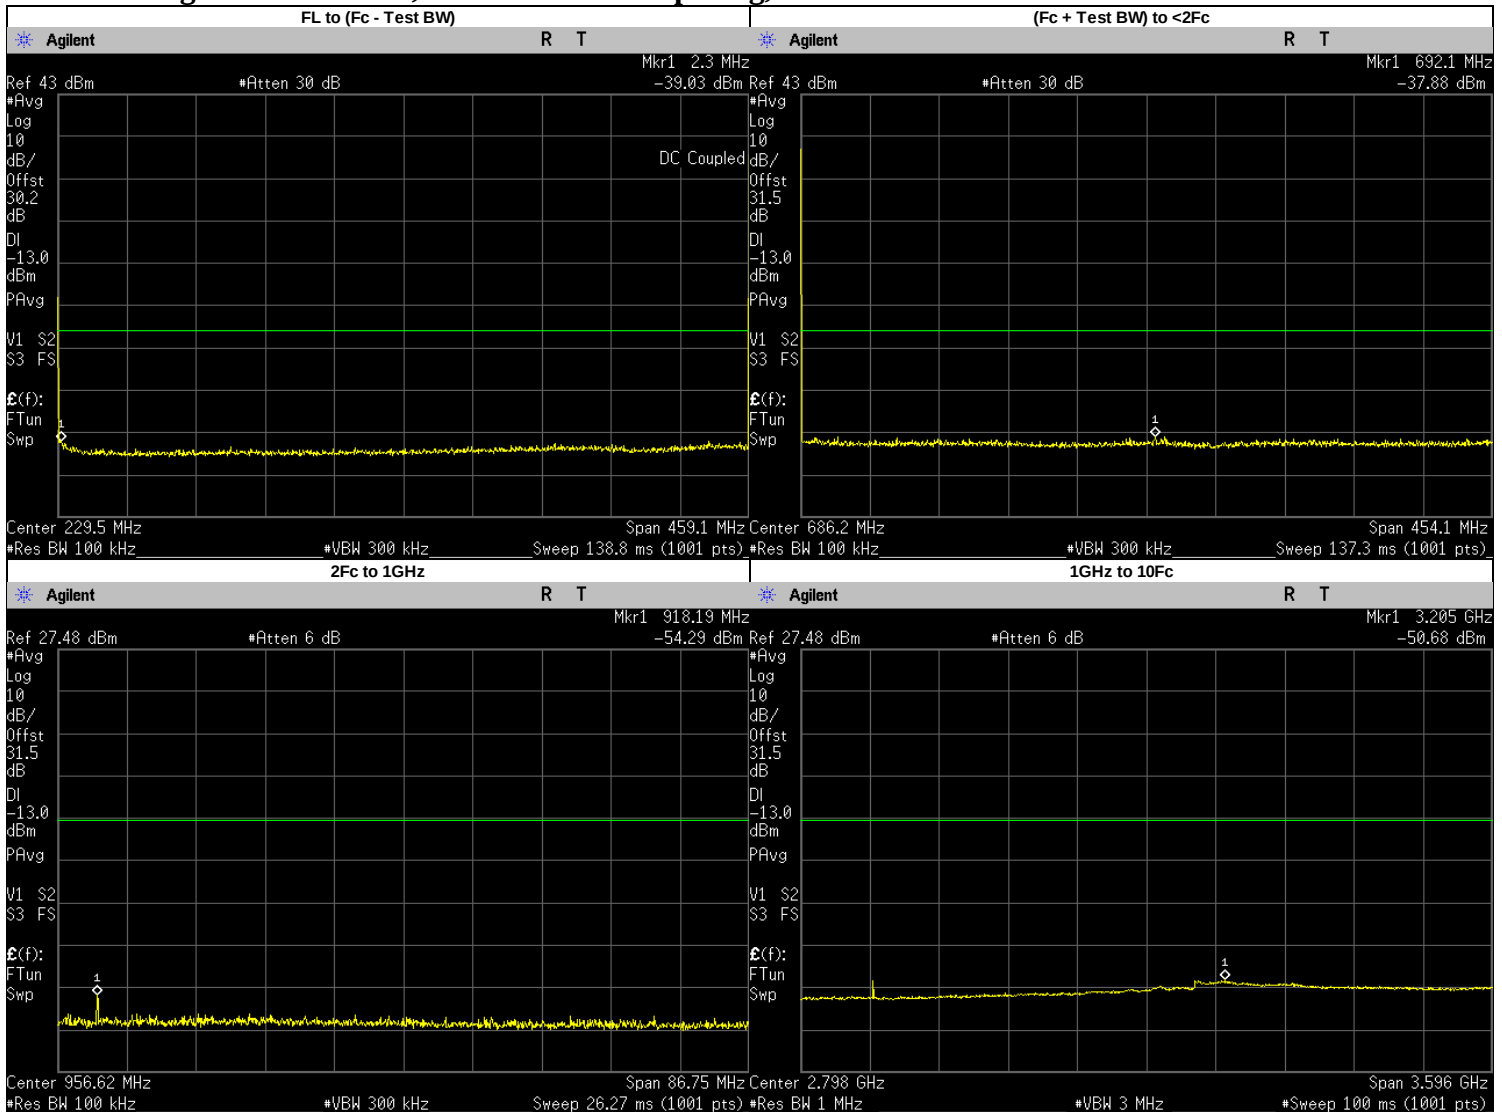


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.3000	-39.0330	-13	PASS
(Fc + Test BW) to <2Fc	692.1188	-37.8700	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	918.1947	-54.2910	-13	PASS
	918.2500	-55.1281	-13	PASS
	3204.5010	-50.6800	-13	PASS
	1377.3750	-51.1274	-13	PASS
	1836.5000	-54.8977	-13	PASS
	2295.6250	-54.2785	-13	PASS
	2754.7500	-53.1811	-13	PASS
	3213.8750	-51.3016	-13	PASS
	3673.0000	-52.3593	-13	PASS
	4132.1250	-52.6660	-13	PASS
	4591.2500	-52.4748	-13	PASS

Analog: 467.7750 MHz, 25 kHz Channel Spacing, Max Power

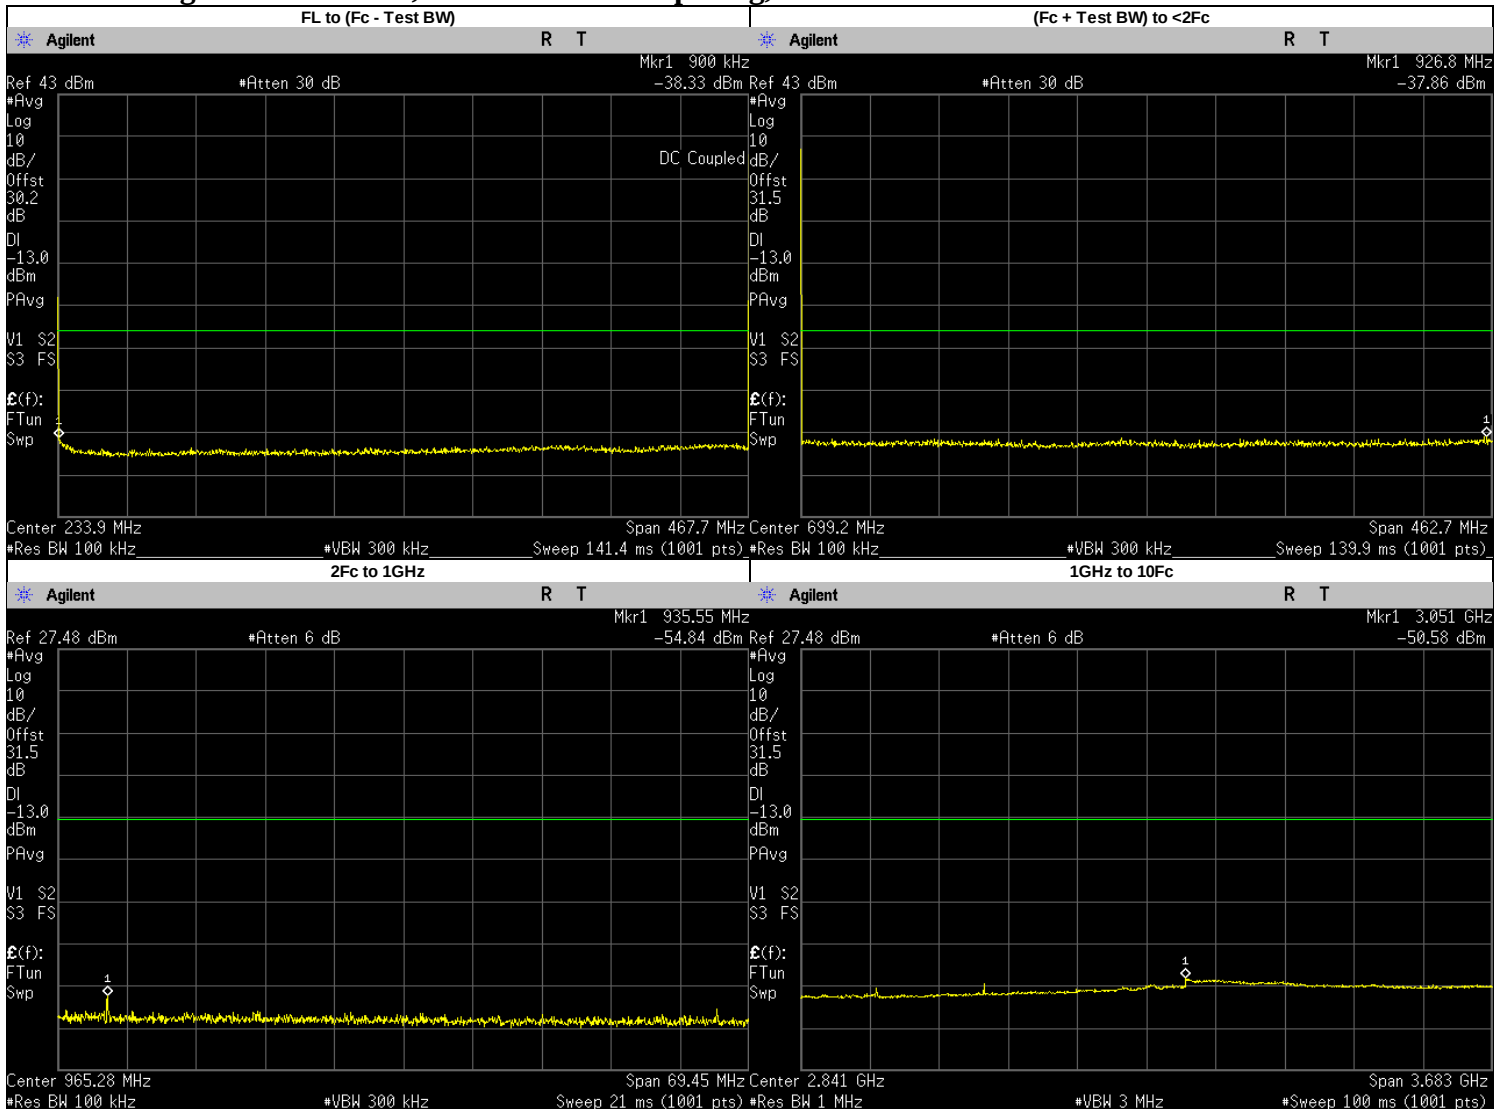


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.9000	-38.3250	-13	PASS
(Fc + Test BW) to <2Fc	926.8483	-37.8600	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	935.5500	-54.8438	-13	PASS
	3051.2920	-50.5800	-13	PASS
	1403.3250	-52.9170	-13	PASS
	1871.1000	-54.5380	-13	PASS
	2338.8750	-54.0620	-13	PASS
	2806.6500	-53.1266	-13	PASS
	3274.4250	-51.5371	-13	PASS
	3742.2000	-52.4805	-13	PASS
	4209.9750	-52.7470	-13	PASS
	4677.7500	-52.5946	-13	PASS

Analog: 467.7750 MHz, 25 kHz Channel Spacing, Low Power

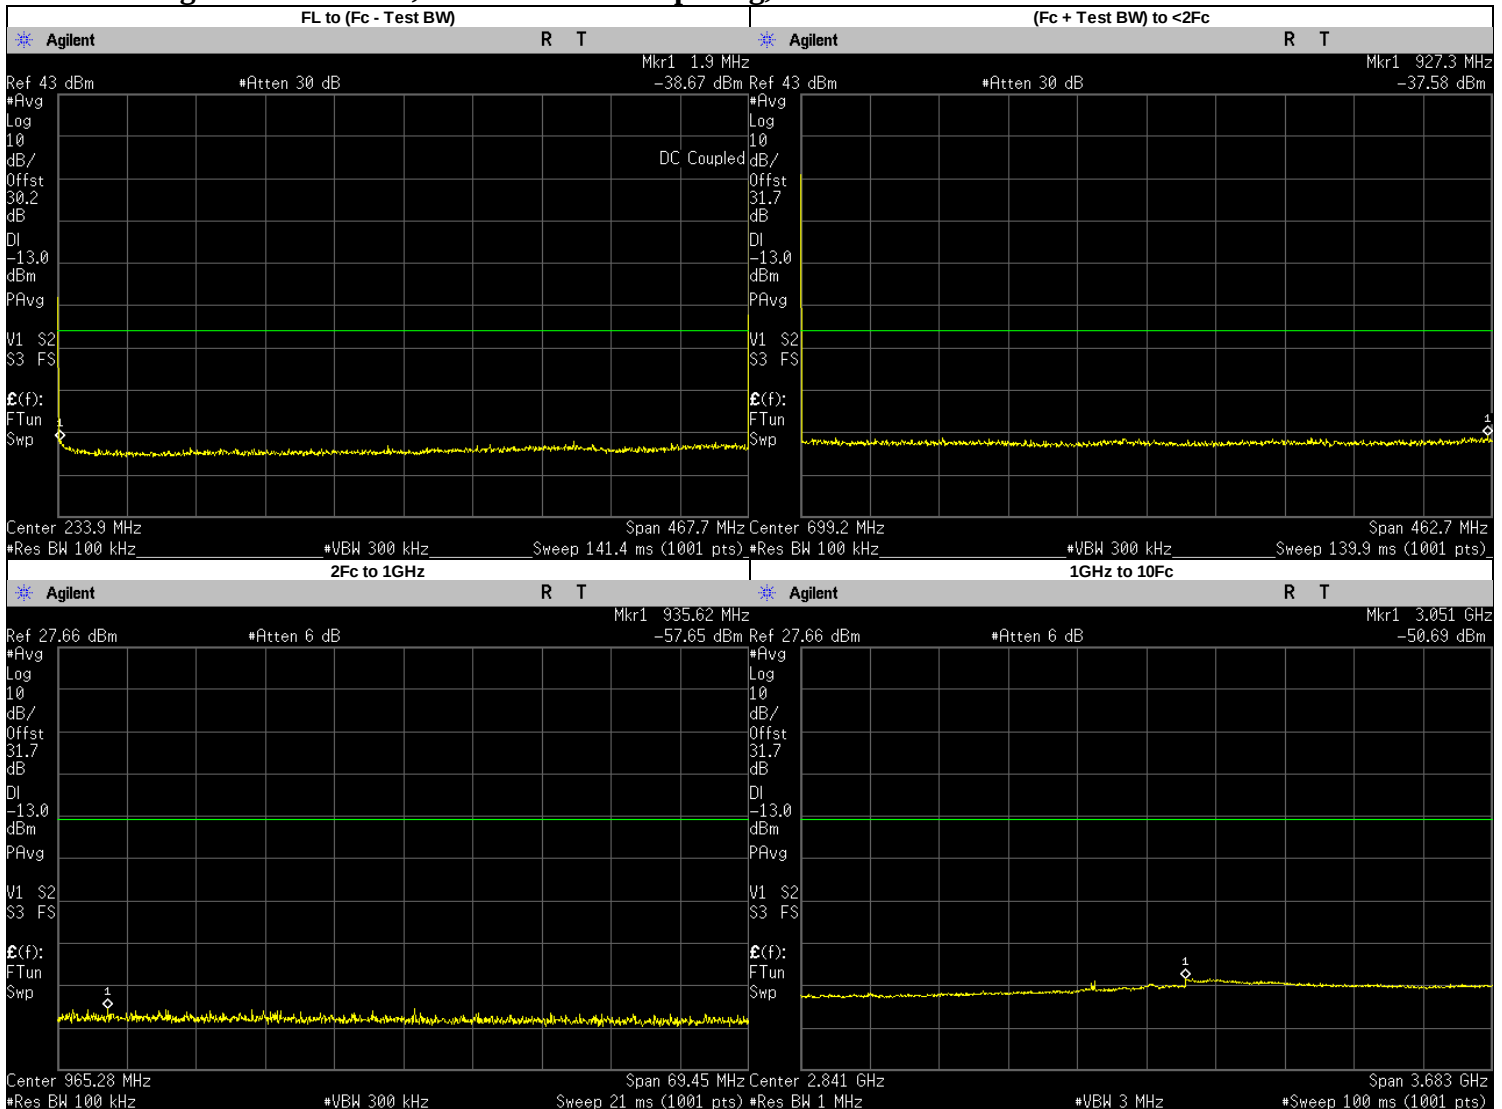

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.9000	-38.6720	-13	PASS
(Fc + Test BW) to <2Fc	927.3110	-37.5800	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	935.6199	-57.6500	-13	PASS
	935.5500	-59.4772	-13	PASS
	3051.2920	-50.6900	-13	PASS
	1403.3250	-54.6869	-13	PASS
	1871.1000	-54.4081	-13	PASS
	2338.8750	-53.9245	-13	PASS
	2806.6500	-52.8549	-13	PASS
	3274.4250	-51.4297	-13	PASS
	3742.2000	-52.2987	-13	PASS
	4209.9750	-52.3884	-13	PASS
	4677.7500	-52.5460	-13	PASS


Analog: 479.9875 MHz, 25 kHz Channel Spacing, Max Power

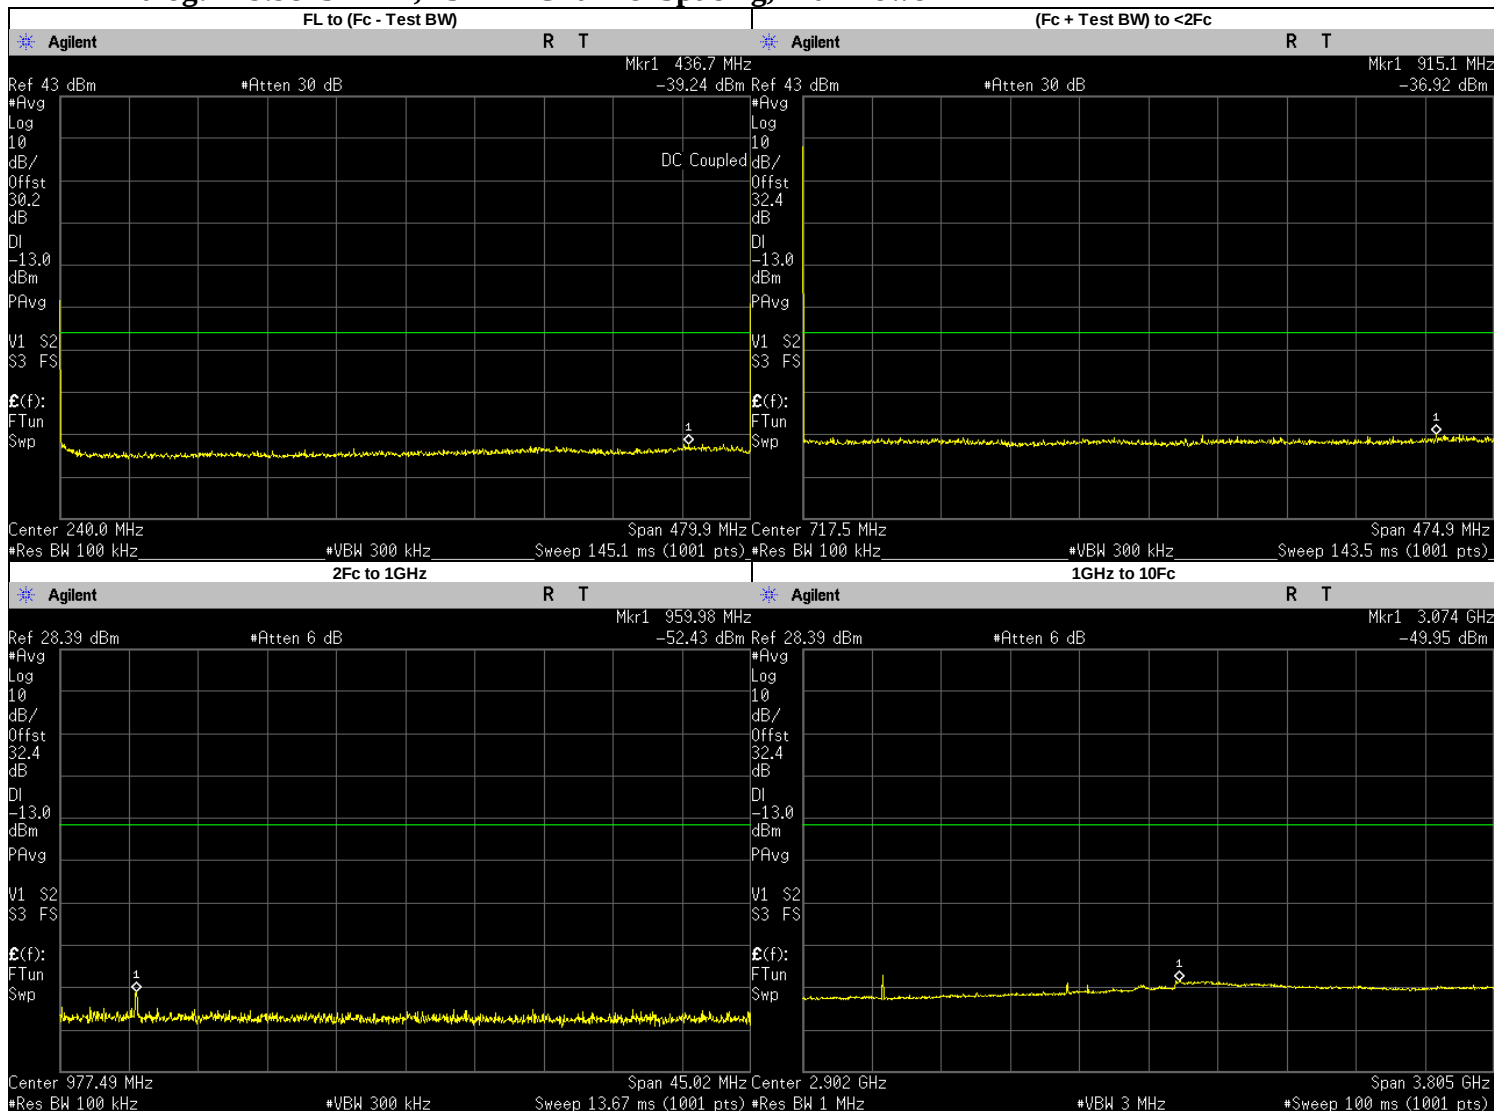

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	436.7000	-39.2380	-13	PASS
(Fc + Test BW) to <2Fc	915.0808	-36.9200	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	959.9750	-52.4320	-13	PASS
	3073.6570	-49.9500	-13	PASS
	1439.9630	-50.2154	-13	PASS
	1919.9500	-53.5373	-13	PASS
	2399.9370	-53.0693	-13	PASS
	2879.9250	-51.4318	-13	PASS
	3359.9120	-50.9285	-13	PASS
	3839.9000	-51.5905	-13	PASS
	4319.8870	-52.0636	-13	PASS
	4799.8750	-51.6779	-13	PASS


6.9.3. Test Result (Digital)

Digital: 400.0125 MHz, 12.5 kHz Channel Spacing, Max Power

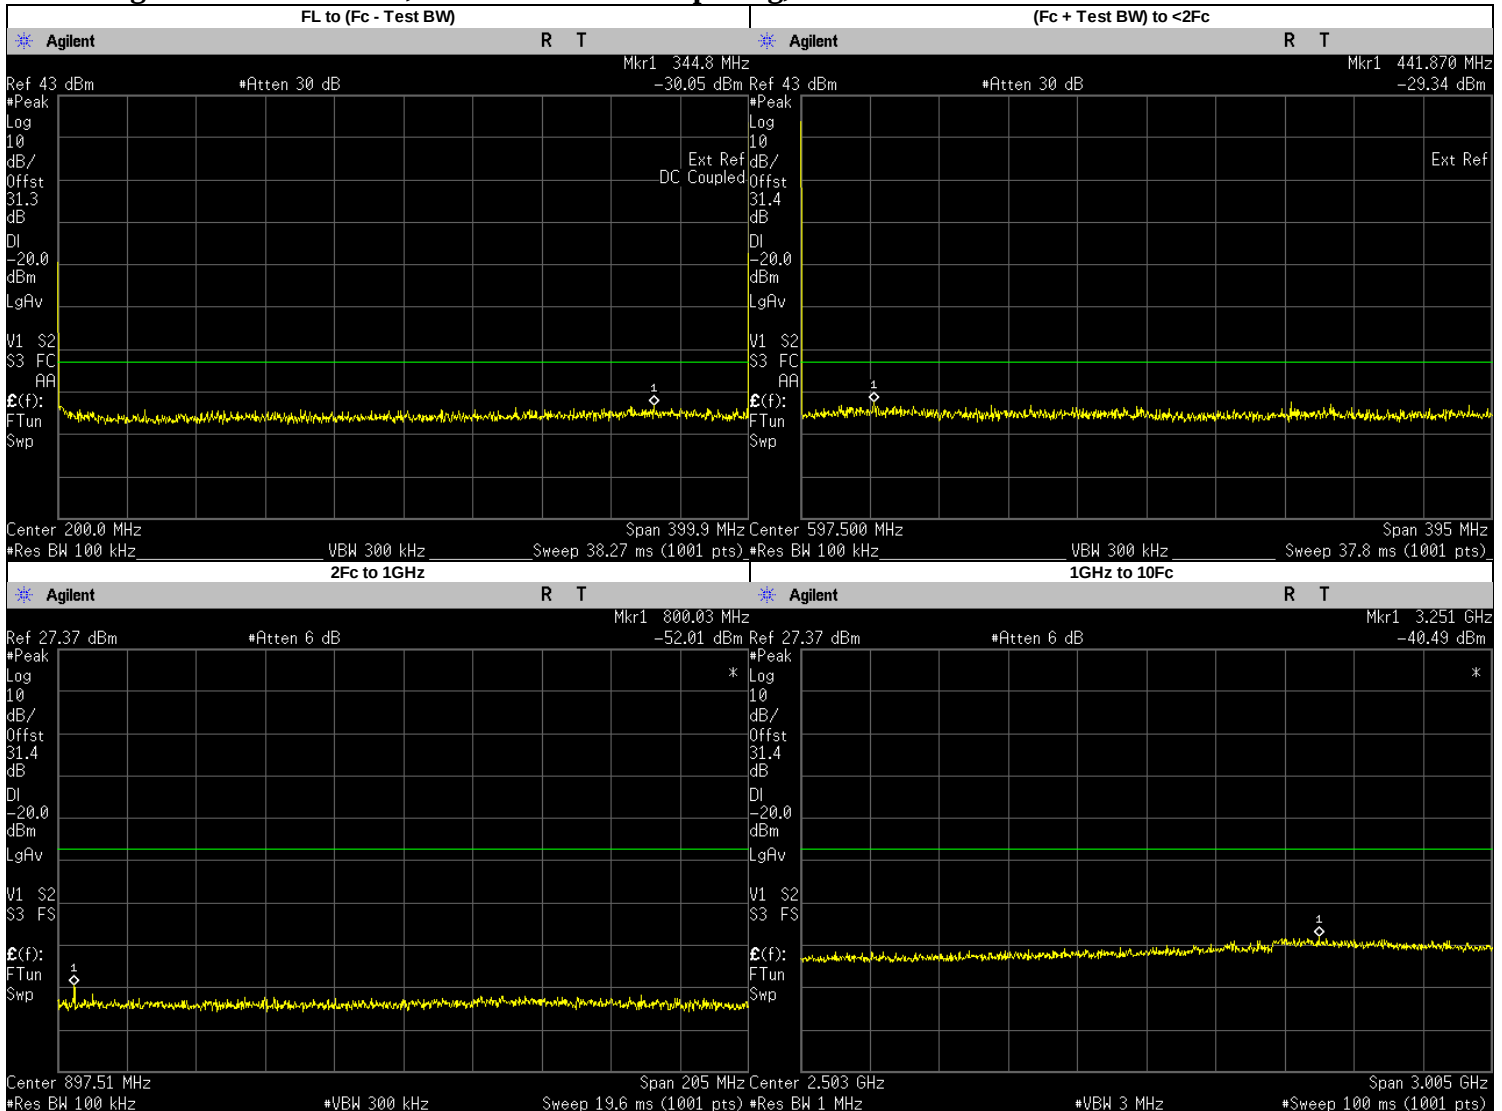


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	344.8000	-30.0500	-20	PASS
(Fc + Test BW) to <2Fc	441.8700	-29.3400	-20	PASS
2Fc to 1GHz	800.0250	-52.0100	-20	PASS
1GHz to 10Fc	3250.8390	-40.4900	-20	PASS
	1200.0370	-45.4226	-20	PASS
	1600.0500	-46.1083	-20	PASS
	2000.0620	-45.6006	-20	PASS
	2400.0750	-44.3434	-20	PASS
	2800.0880	-43.8468	-20	PASS
	3200.1000	-41.6837	-20	PASS
	3600.1130	-42.5763	-20	PASS
	4000.1250	-43.8146	-20	PASS

Digital: 406.2000 MHz, 12.5 kHz Channel Spacing, Max Power

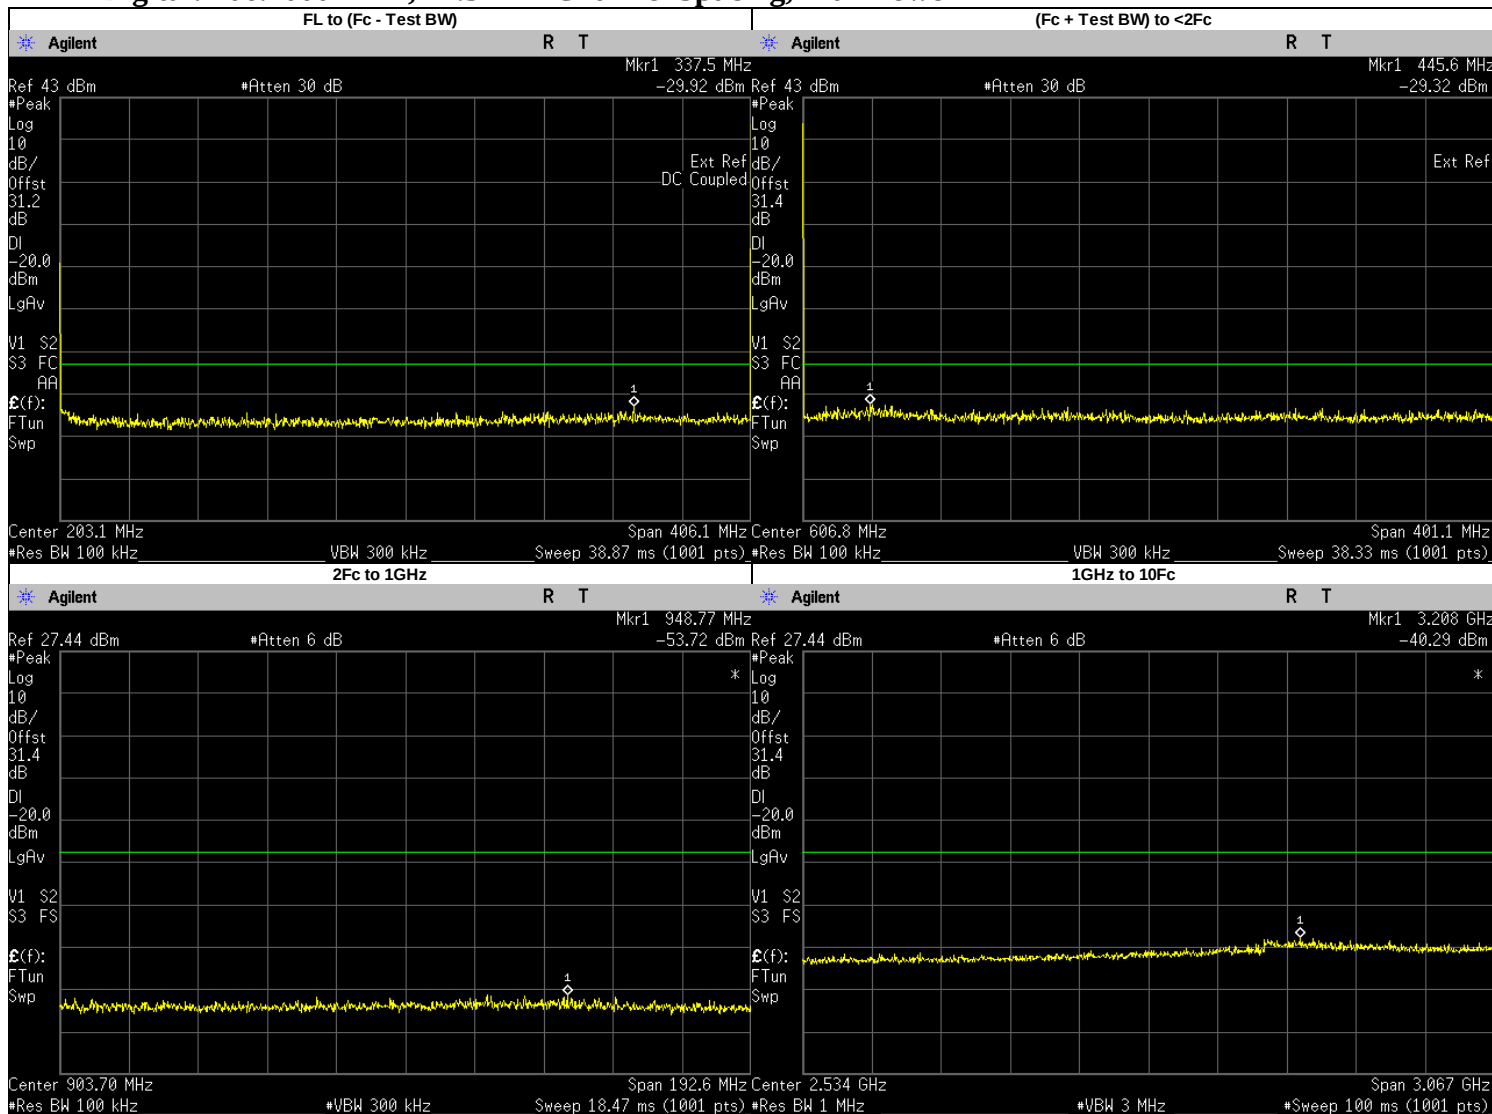


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	337.5000	-29.9200	-20	PASS
(Fc + Test BW) to <2Fc	445.6000	-29.3200	-20	PASS
2Fc to 1GHz	948.7684	-53.7200	-20	PASS
1GHz to 10Fc	812.4000	-56.0589	-20	PASS
	3208.2400	-40.2900	-20	PASS
	1218.6000	-45.4098	-20	PASS
	1624.8000	-45.8363	-20	PASS
	2031.0000	-45.1865	-20	PASS
	2437.2000	-44.8514	-20	PASS
	2843.4000	-43.2779	-20	PASS
	3249.6000	-41.8155	-20	PASS
	3655.8000	-41.9454	-20	PASS
	4062.0000	-43.3100	-20	PASS

Digital: 450.0250 MHz, 12.5 kHz Channel Spacing, Max Power

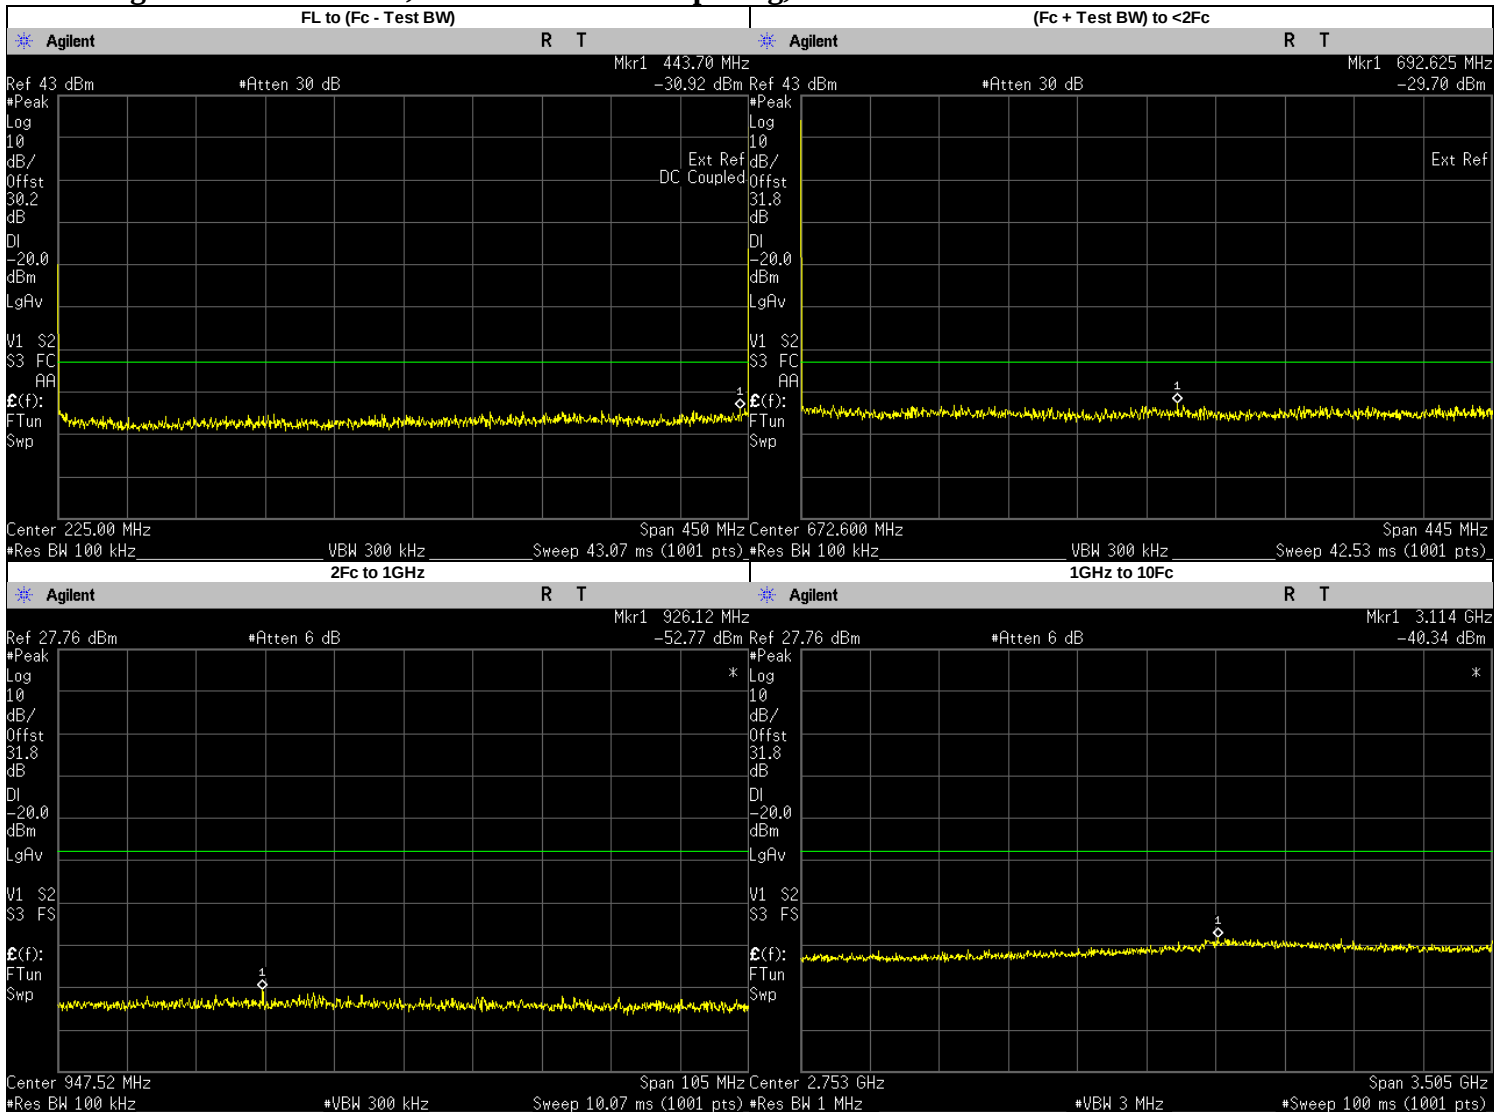


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	443.7000	-30.9200	-20	PASS
(Fc + Test BW) to <2Fc	692.6250	-29.7000	-20	PASS
2Fc to 1GHz	926.1152	-52.7700	-20	PASS
1GHz to 10Fc	900.0500	-55.9689	-20	PASS
	3113.6660	-40.3400	-20	PASS
	1350.0750	-45.2424	-20	PASS
	1800.1000	-45.3231	-20	PASS
	2250.1250	-44.3483	-20	PASS
	2700.1500	-42.9609	-20	PASS
	3150.1750	-40.9493	-20	PASS
	3600.2000	-42.2565	-20	PASS
	4050.2250	-43.0079	-20	PASS
	4500.2500	-42.9546	-20	PASS

Digital: 450.0250 MHz, 12.5 kHz Channel Spacing, Low Power

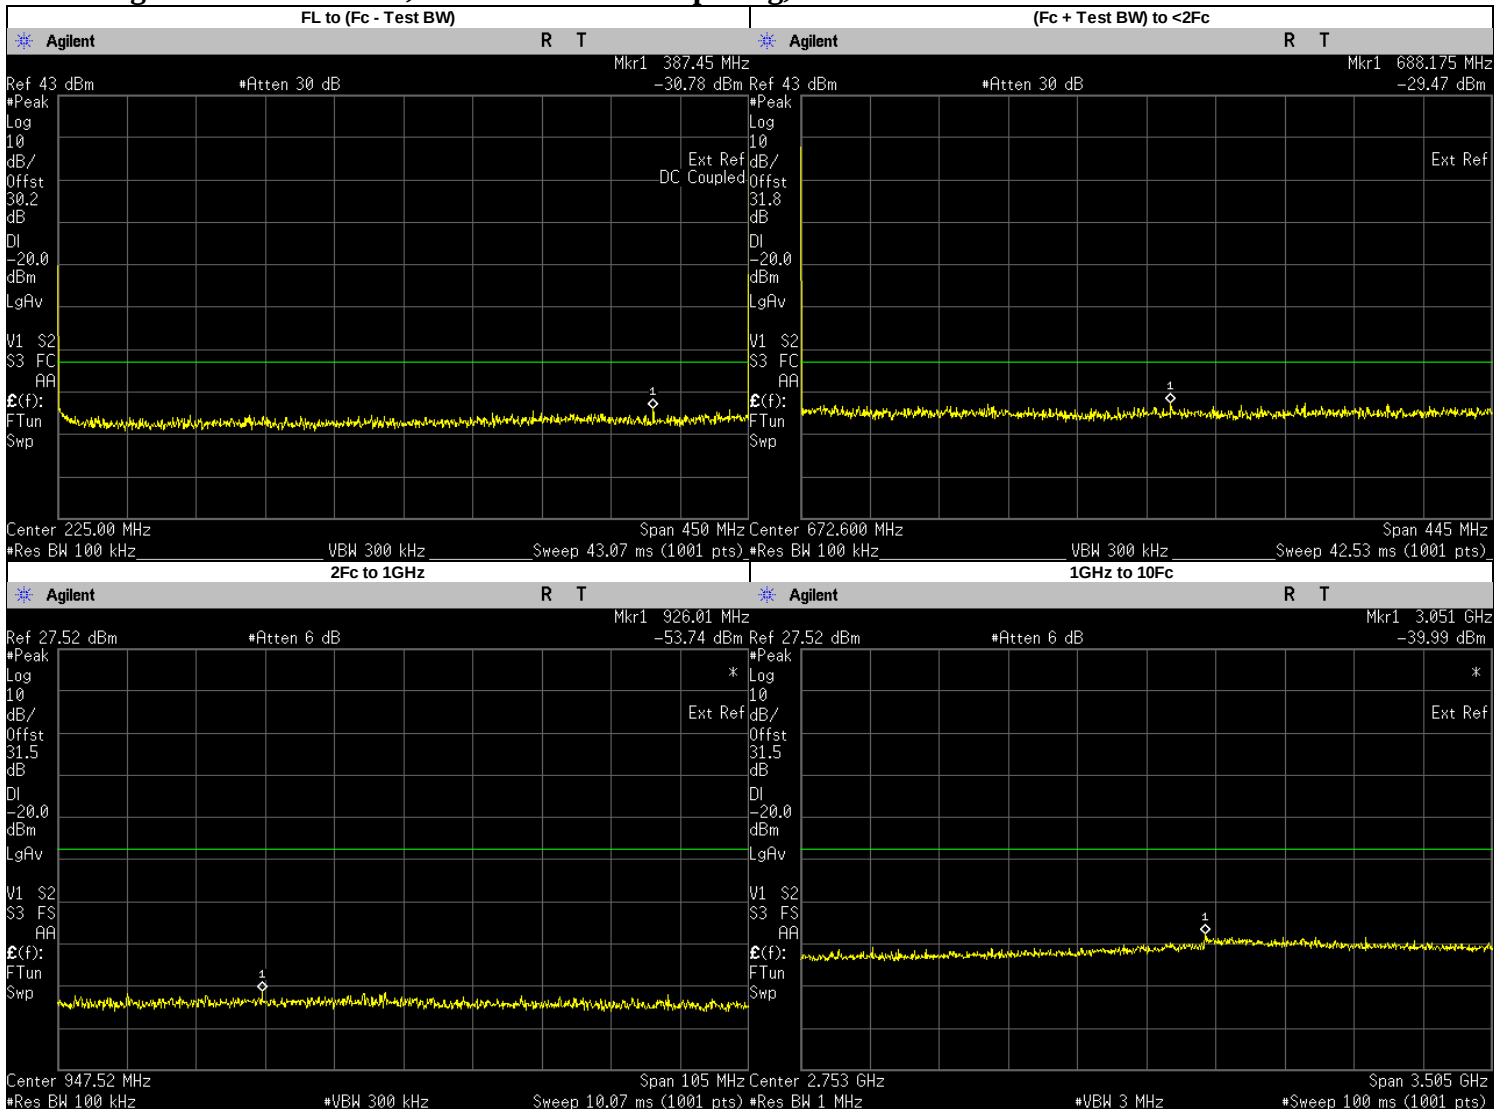


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	387.4500	-30.7800	-20	PASS
(Fc + Test BW) to <2Fc	688.1750	-29.4700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	926.0103	-53.7400	-20	PASS
	900.0500	-56.5314	-20	PASS
	3050.5710	-39.9900	-20	PASS
	1350.0750	-45.2589	-20	PASS
	1800.1000	-44.9587	-20	PASS
	2250.1250	-44.7911	-20	PASS
	2700.1500	-43.4966	-20	PASS
	3150.1750	-41.5147	-20	PASS
	3600.2000	-42.6737	-20	PASS
	4050.2250	-42.8999	-20	PASS
	4500.2500	-43.2211	-20	PASS

Digital: 459.1250 MHz, 12.5 kHz Channel Spacing, Max Power

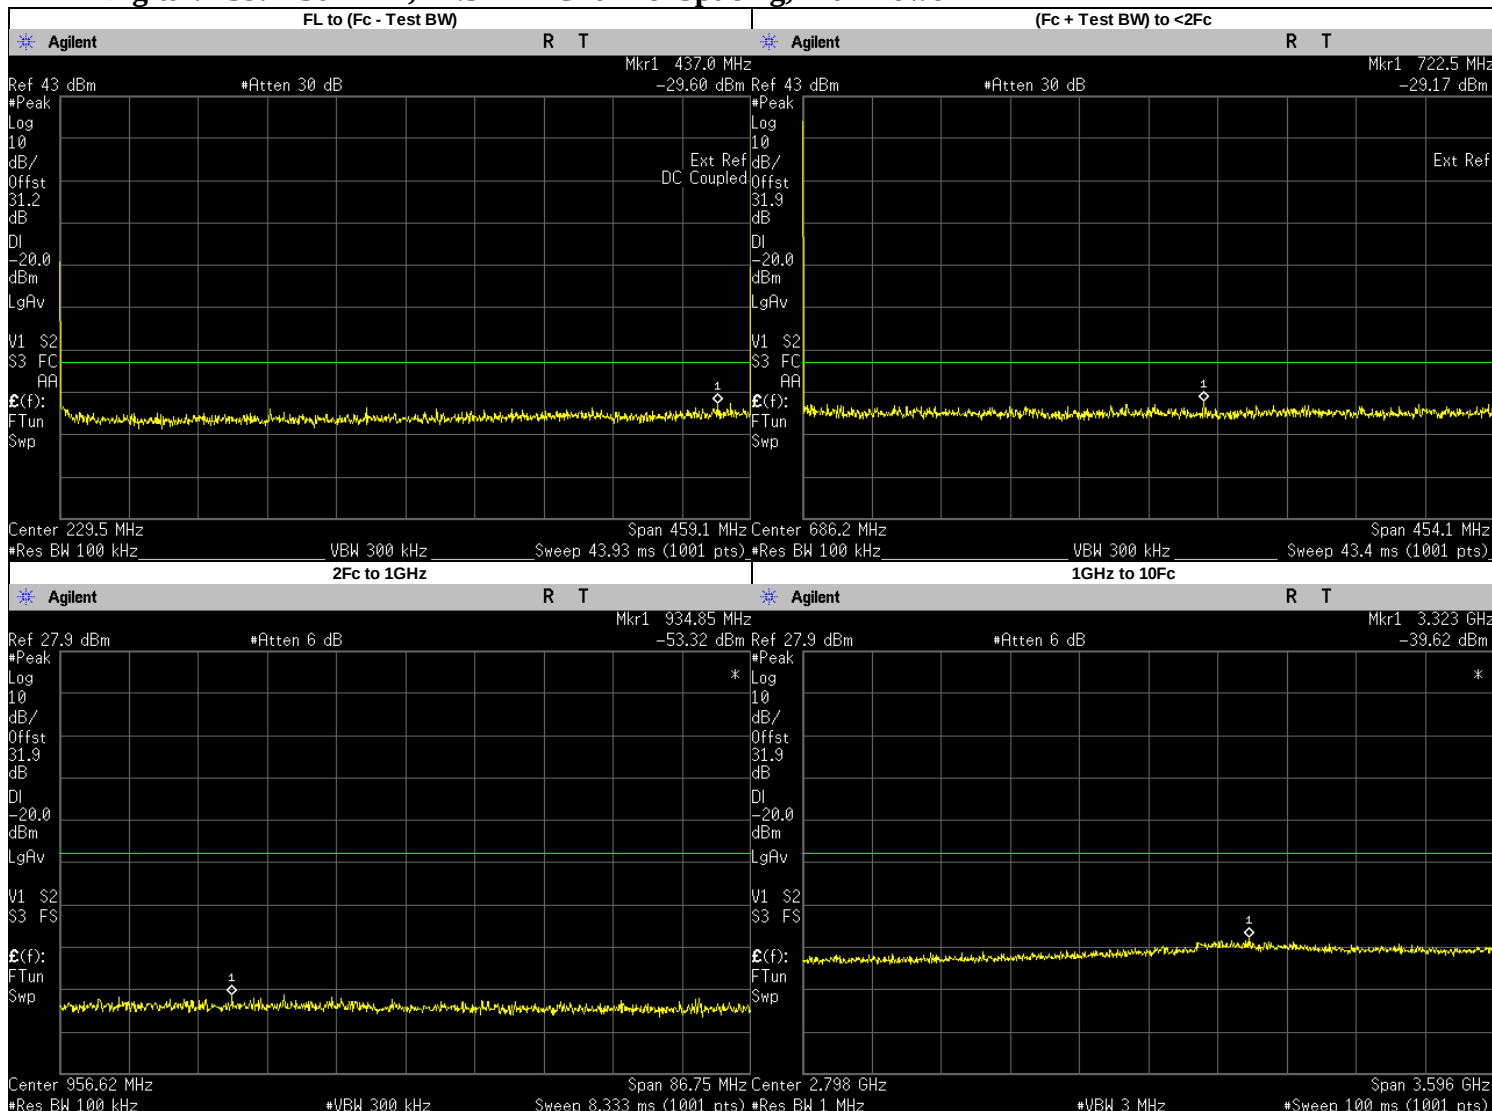


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	437.0000	-29.6000	-20	PASS
(Fc + Test BW) to <2Fc	722.5000	-29.1700	-20	PASS
2Fc to 1GHz	934.8507	-53.3200	-20	PASS
1GHz to 10Fc	918.2500	-54.4401	-20	PASS
	3323.1770	-39.6200	-20	PASS
	1377.3750	-44.6628	-20	PASS
	1836.5000	-45.3321	-20	PASS
	2295.6250	-44.2697	-20	PASS
	2754.7500	-43.4603	-20	PASS
	3213.8750	-41.8853	-20	PASS
	3673.0000	-42.7003	-20	PASS
	4132.1250	-43.1247	-20	PASS
	4591.2500	-42.8415	-20	PASS

Digital: 467.7750 MHz, 12.5 kHz Channel Spacing, Max Power

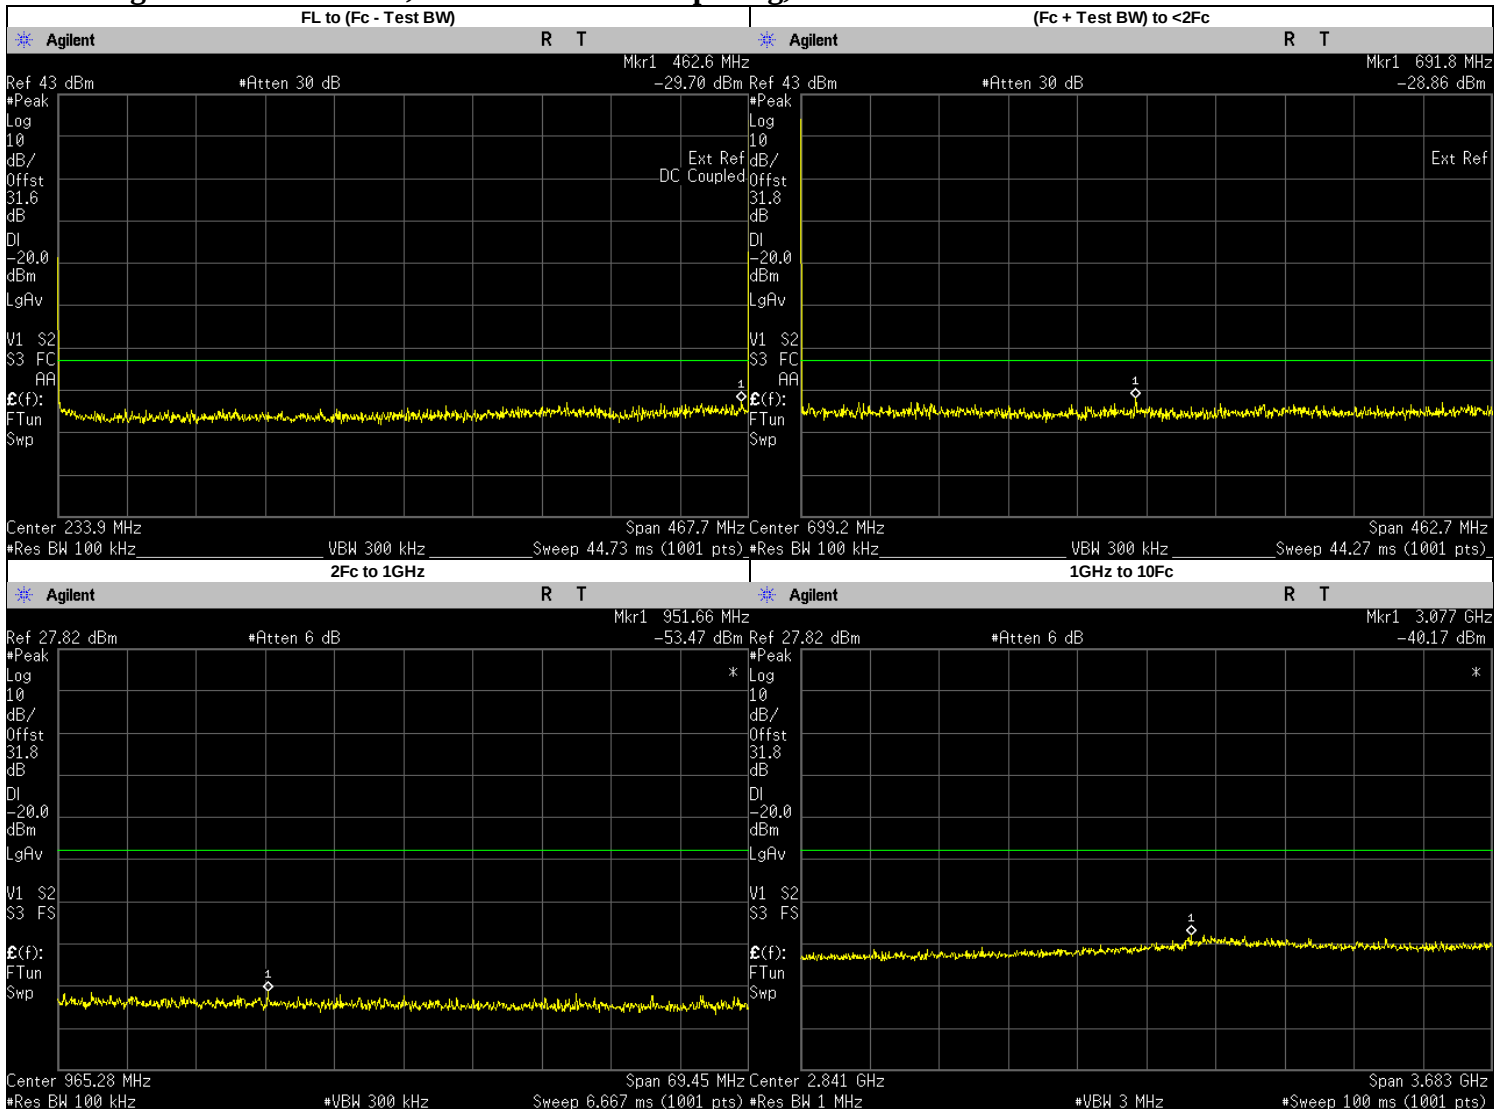

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	462.6000	-29.7000	-20	PASS
(Fc + Test BW) to <2Fc	691.8000	-28.8600	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	951.6628	-53.4700	-20	PASS
	935.5500	-55.3585	-20	PASS
	3077.0710	-40.1667	-20	PASS
	1403.3250	-44.7280	-20	PASS
	1871.1000	-44.7205	-20	PASS
	2338.8750	-44.3577	-20	PASS
	2806.6500	-43.4043	-20	PASS
	3274.4250	-41.8036	-20	PASS
	3742.2000	-42.6254	-20	PASS
	4209.9750	-42.9409	-20	PASS
	4677.7500	-42.4011	-20	PASS

Digital: 479.9875 MHz, 12.5 kHz Channel Spacing, Max Power

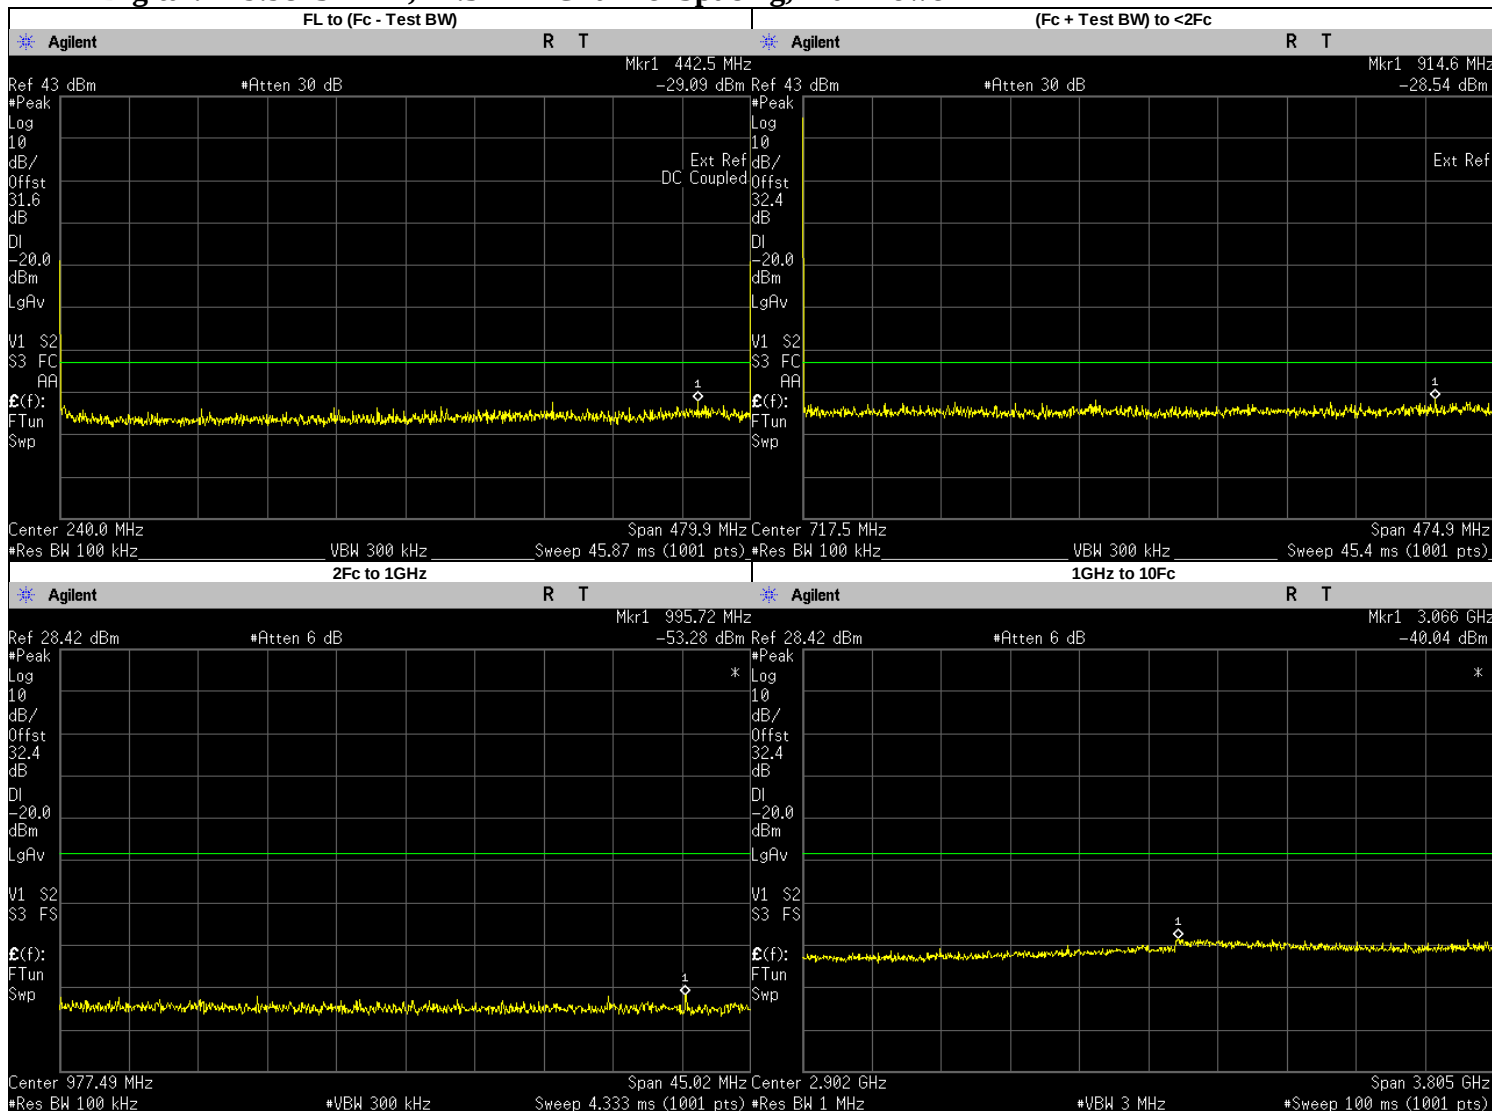

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	442.5000	-29.0900	-20	PASS
(Fc + Test BW) to <2Fc	914.6000	-28.5400	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	995.7226	-53.2800	-20	PASS
	959.9750	-55.6669	-20	PASS
	3066.0470	-40.0500	-20	PASS
	1439.9630	-44.5625	-20	PASS
	1919.9500	-44.2907	-20	PASS
	2399.9370	-42.9736	-20	PASS
	2879.9250	-42.1570	-20	PASS
	3359.9120	-41.2006	-20	PASS
	3839.9000	-41.7247	-20	PASS
	4319.8870	-41.8988	-20	PASS
	4799.8750	-42.1851	-20	PASS

6.9.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	Not Applicable	$50 + \log_{10}(P)$ (-20 dBm)	$43 + \log_{10}(P)$ (-13 dBm)
25kHz		Not Applicable		$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	$43 + \log_{10}(P)$ (-13 dBm)	Not Applicable	$50 + \log_{10}(P)$ (-20 dBm)	$43 + \log_{10}(P)$ (-13 dBm)
25kHz	Not Applicable	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)

6.10. Radiated Spurious Emission

6.10.1. Test Setup

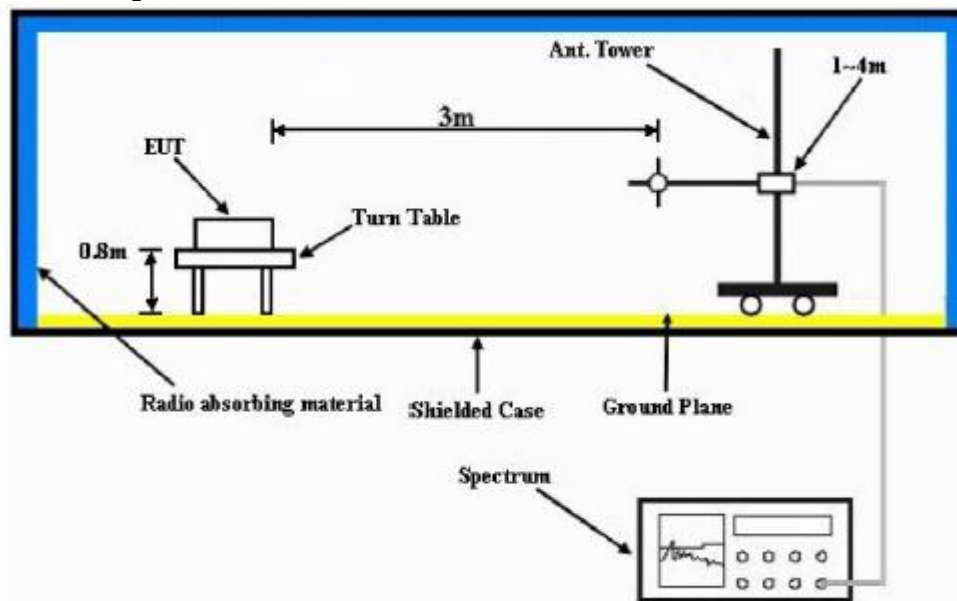


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.10.2. Test Result (Analog)

Model Number: AAH11YDC9JA2AN **SAC Transmitter Radiated Emission** **S/N:** 902EAB7509 **SR:**0645P00-EMC-00004
Battery Part No: PMNN4598A **Accy Part No:** NA
Test Mode: TX Analog
400.012500 MHz **25 kHz** **4.800 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
800.0250	-13.0000	-82.1034 **	-82.0956 **
1200.0375	-13.0000	-61.9641 **	-59.5340 **
1600.0500	-13.0000	-59.6241 **	-60.0214 **
2000.0625	-13.0000	-56.4654 **	-54.9846 **
2400.0750	-13.0000	-57.7827 **	-56.7788 **
2800.0875	-13.0000	-55.8030 **	-56.1589 **
3200.1000	-13.0000	-52.2516 **	-53.2774 **
3600.1125	-13.0000	-53.3781 **	-54.3886 **
4000.1250	-13.0000	-51.6841 **	-50.6854 **

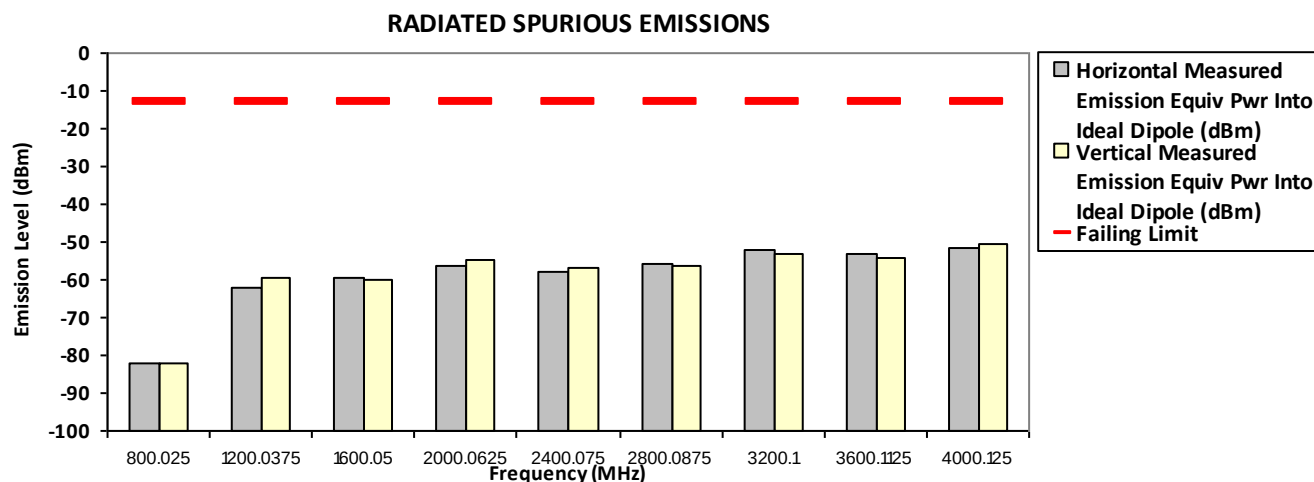

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

S/N: 902EAB7509

SR:0645P00-EMC-00004
Accy Part No: NA


SAC Transmitter Radiated Emission

Test Mode: TX Analog
25 kHz

406.20000 MHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-83.2268 **	-83.1060 **
1218.6000	-13.0000	-62.2040 **	-61.4485 **
1624.8000	-13.0000	-61.3633 **	-61.6413 **
2031.0000	-13.0000	-56.0065 **	-56.4073 **
2437.2000	-13.0000	-57.8633 **	-56.4593 **
2843.4000	-13.0000	-55.8326 **	-54.0726 **
3249.6000	-13.0000	-53.7824 **	-53.7492 **
3655.8000	-13.0000	-54.4077 **	-52.8003 **
4062.0000	-13.0000	-50.8416 **	-50.6746 **

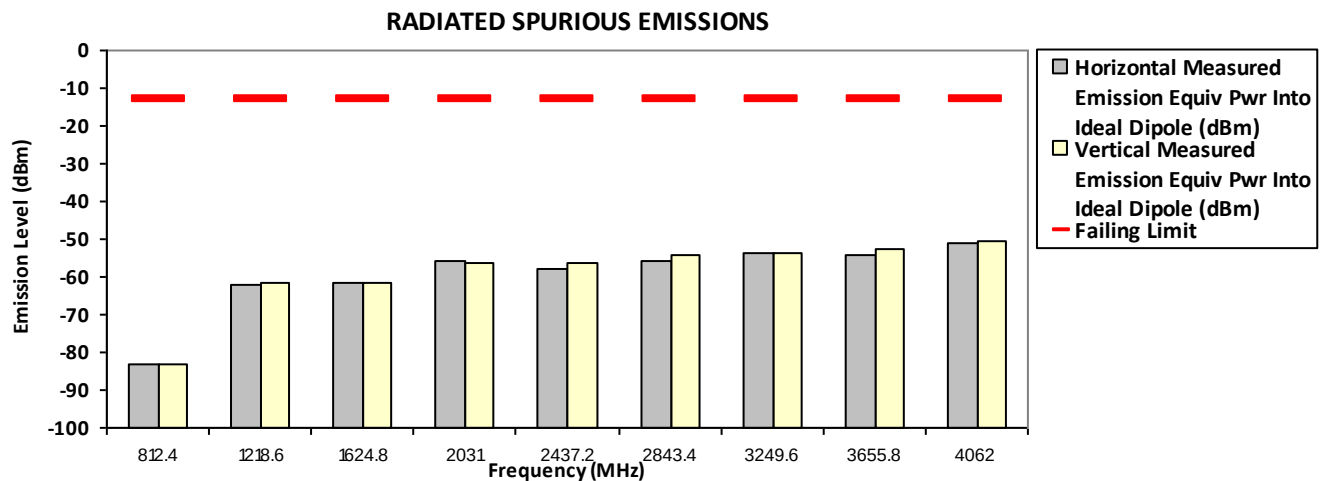

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:

Passed Results

Marginal Results


Failed Results

SAC Transmitter Radiated Emission
Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A
S/N: 902EAB7509

SR:0645P00-EMC-00004
Accy Part No: NA

Test Mode: TX Analog
450.025000 MHz
25 kHz
1.00 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-81.4865 **	-81.9965 **
1350.0750	-13.0000	-61.1814 **	-58.6928 **
1800.1000	-13.0000	-59.0679 **	-60.5134 **
2250.1250	-13.0000	-57.2830 **	-57.4197 **
2700.1500	-13.0000	-56.5810 **	-55.3033 **
3150.1750	-13.0000	-52.3101 **	-53.4368 **
3600.2000	-13.0000	-50.9662 **	-51.6805 **
4050.2250	-13.0000	-50.5529 **	-49.2740 **
4500.2500	-13.0000	-50.5153 **	-50.7803 **

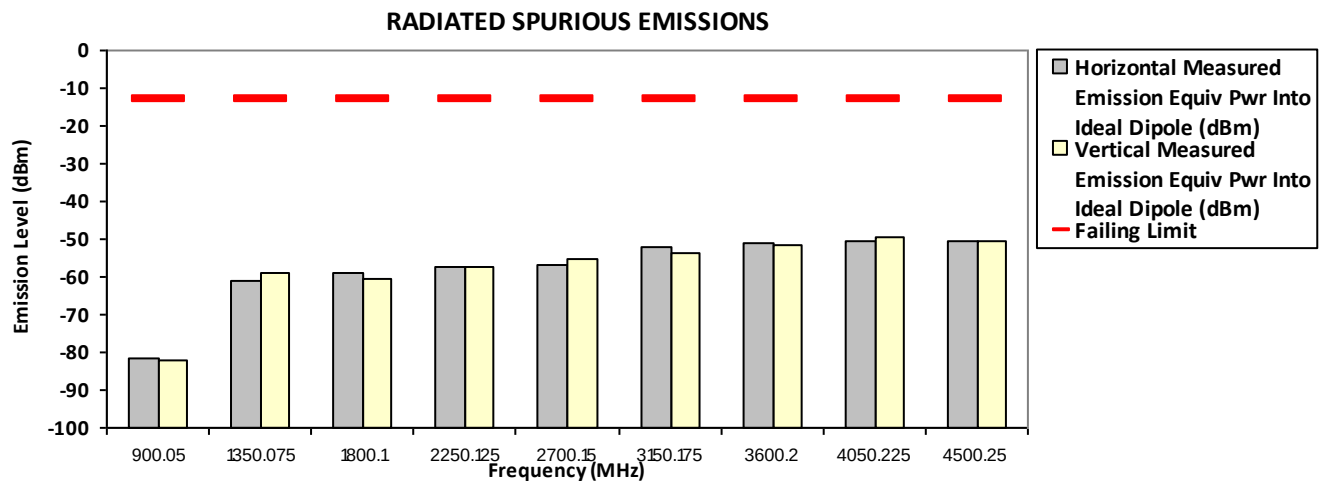

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB


Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission
Model Number: AAH11YDC9JA2AN S/N: 902EAB7509
Battery Part No: PMNN4598A

SR:0645P00-EMC-00004
Accy Part No: NA

Test Mode: TX Analog
450.025000 MHz 25 kHz 4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-80.9769 **	-80.7409 **
1350.0750	-13.0000	-58.5664 **	-58.9578 **
1800.1000	-13.0000	-59.7647 **	-60.1919 **
2250.1250	-13.0000	-57.8797 **	-55.2610 **
2700.1500	-13.0000	-55.4875 **	-56.3009 **
3150.1750	-13.0000	-52.3757 **	-53.3588 **
3600.2000	-13.0000	-51.7035 **	-53.1499 **
4050.2250	-13.0000	-50.0478 **	-50.5760 **
4500.2500	-13.0000	-49.8757 **	-50.5170 **

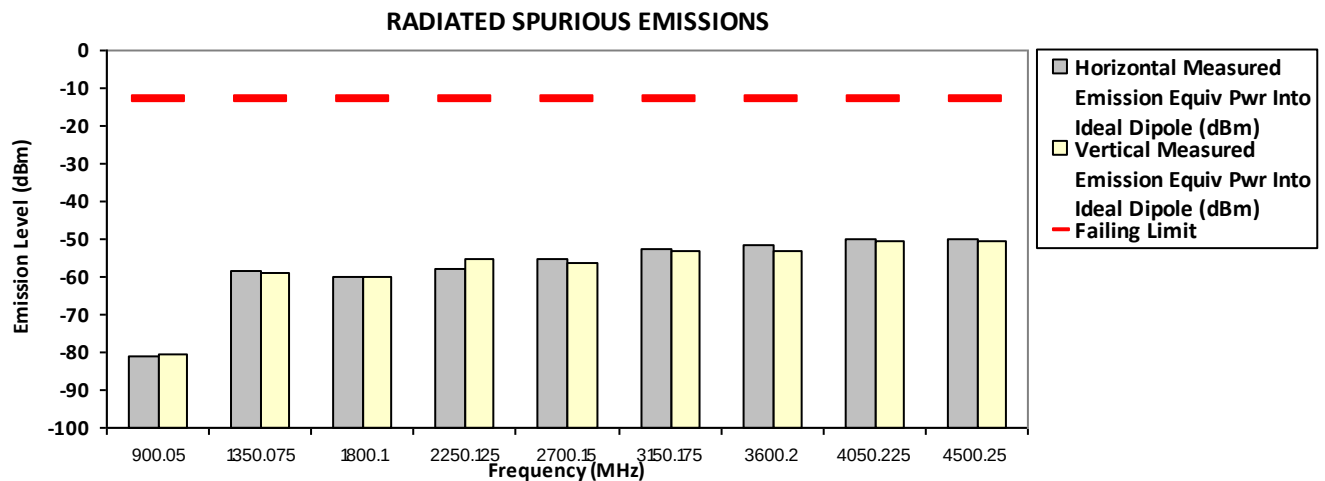

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

459.125000 MHz

Test Mode: TX Analog
25 kHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-81.4035 **	-81.7626 **
1377.3750	-13.0000	-57.7100 *	-54.3600 *
1836.5000	-13.0000	-60.0511 **	-58.7467 **
2295.6250	-13.0000	-57.5838 **	-57.2707 **
2754.7500	-13.0000	-56.1804 **	-56.5303 **
3213.8750	-13.0000	-52.9918 **	-53.0416 **
3673.0000	-13.0000	-52.4807 **	-52.4772 **
4132.1250	-13.0000	-51.3396 **	-52.4937 **
4591.2500	-13.0000	-49.9345 **	-50.4623 **

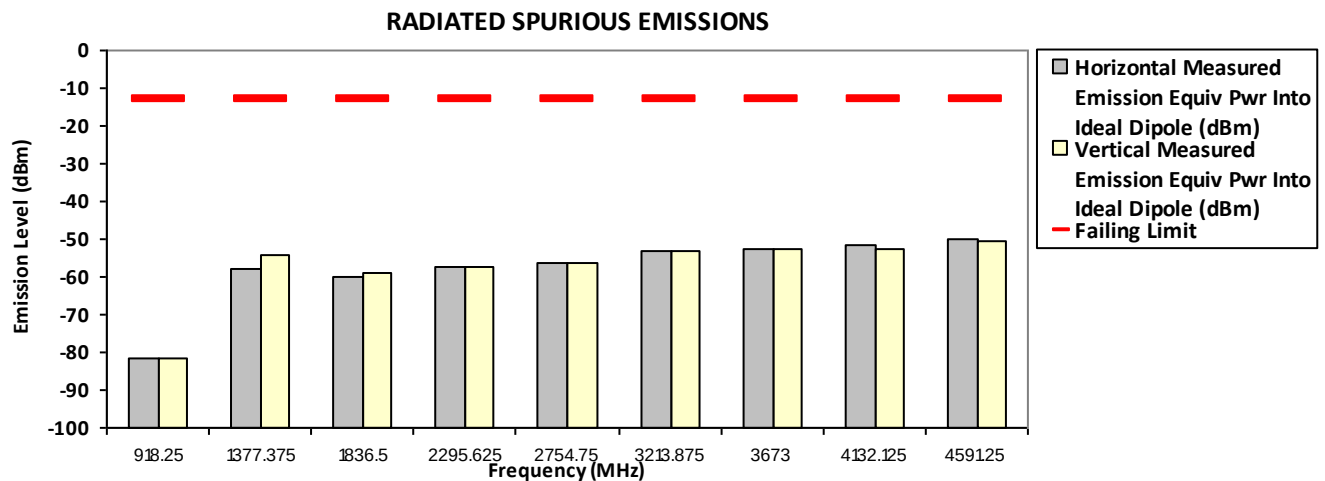

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission
Model Number: AAH11YDC9JA2AN **S/N: 902EAB7509** **SR:0645P00-EMC-00004**
Battery Part No: PMNN4598A **Test Mode: TX Analog** **Accy Part No: NA**
467.775000 MHz **25 kHz** **1.00 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-79.5892 **	-81.5951 **
1403.3250	-13.0000	-56.0600 *	-52.3300 *
1871.1000	-13.0000	-59.4377 **	-60.0217 **
2338.8750	-13.0000	-57.8015 **	-57.1189 **
2806.6500	-13.0000	-56.0518 **	-56.1165 **
3274.4250	-13.0000	-51.8808 **	-52.9272 **
3742.2000	-13.0000	-52.9204 **	-51.5467 **
4209.9750	-13.0000	-49.5028 **	-50.9020 **
4677.7500	-13.0000	-50.9259 **	-50.0226 **

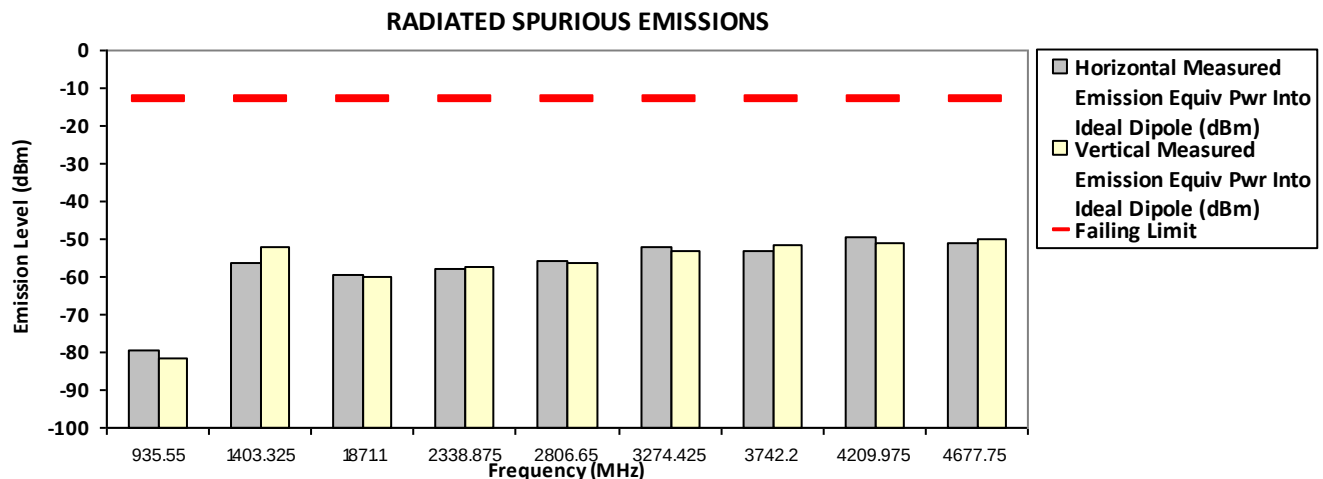

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

467.775000 MHz

Test Mode: TX Analog
25 kHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-81.1667 **	-81.3323 **
1403.3250	-13.0000	-58.2100 *	-53.2300 *
1871.1000	-13.0000	-58.8741 **	-60.1483 **
2338.8750	-13.0000	-57.4973 **	-57.4433 **
2806.6500	-13.0000	-56.2848 **	-55.5375 **
3274.4250	-13.0000	-52.3139 **	-52.8807 **
3742.2000	-13.0000	-53.0527 **	-52.1973 **
4209.9750	-13.0000	-51.2885 **	-51.6475 **
4677.7500	-13.0000	-50.4742 **	-50.8992 **

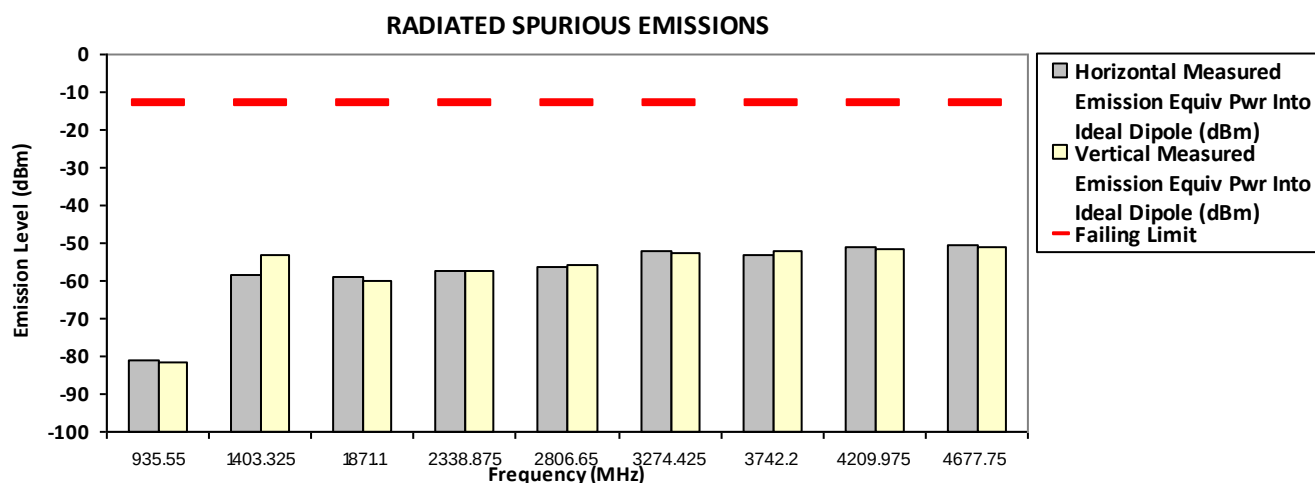

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

469.987500 MHz

Test Mode: TX Analog
25 kHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-13.0000	-81.4450 **	-81.5115 **
1409.9625	-13.0000	-58.5400 *	-53.2600 *
1879.9500	-13.0000	-59.9605 **	-58.7731 **
2349.9375	-13.0000	-57.7721 **	-57.9053 **
2819.9250	-13.0000	-56.0319 **	-56.1319 **
3289.9125	-13.0000	-52.6821 **	-53.7471 **
3759.9000	-13.0000	-53.4908 **	-51.6757 **
4229.8875	-13.0000	-50.4285 **	-51.1449 **
4699.8750	-13.0000	-49.5194 **	-49.1507 **

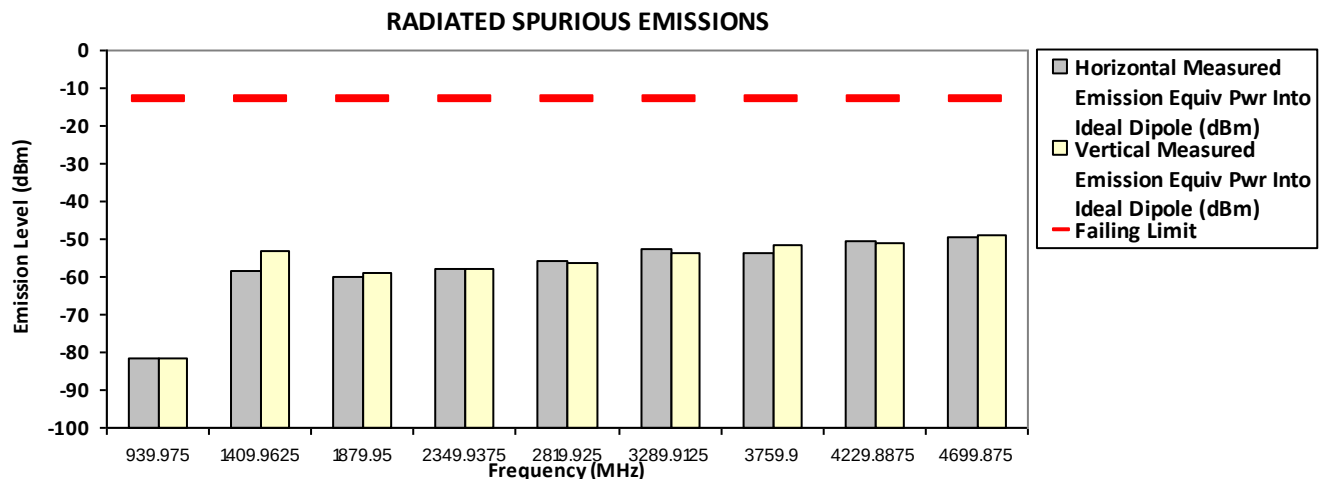

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3


System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

6.10.3. Test Result (Digital)

Model Number: AAH11YDC9JA2AN **SAC Transmitter Radiated Emission** **S/N:** 902EAB7509 **SR:**0645P00-EMC-00004
Battery Part No: PMNN4598A **Accy Part No:** NA
Test Mode: TX Digital
400.012500 MHz **12.5 kHz** **4.800 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
800.0250	-20.0000	-82.8033 **	-80.8982 **
1200.0375	-20.0000	-62.1973 **	-60.6647 **
1600.0500	-20.0000	-61.7305 **	-60.4424 **
2000.0625	-20.0000	-56.0270 **	-55.5314 **
2400.0750	-20.0000	-57.5549 **	-56.6576 **
2800.0875	-20.0000	-55.3971 **	-55.4557 **
3200.1000	-20.0000	-54.2333 **	-53.4659 **
3600.1125	-20.0000	-53.7846 **	-53.9388 **
4000.1250	-20.0000	-52.0324 **	-52.0045 **

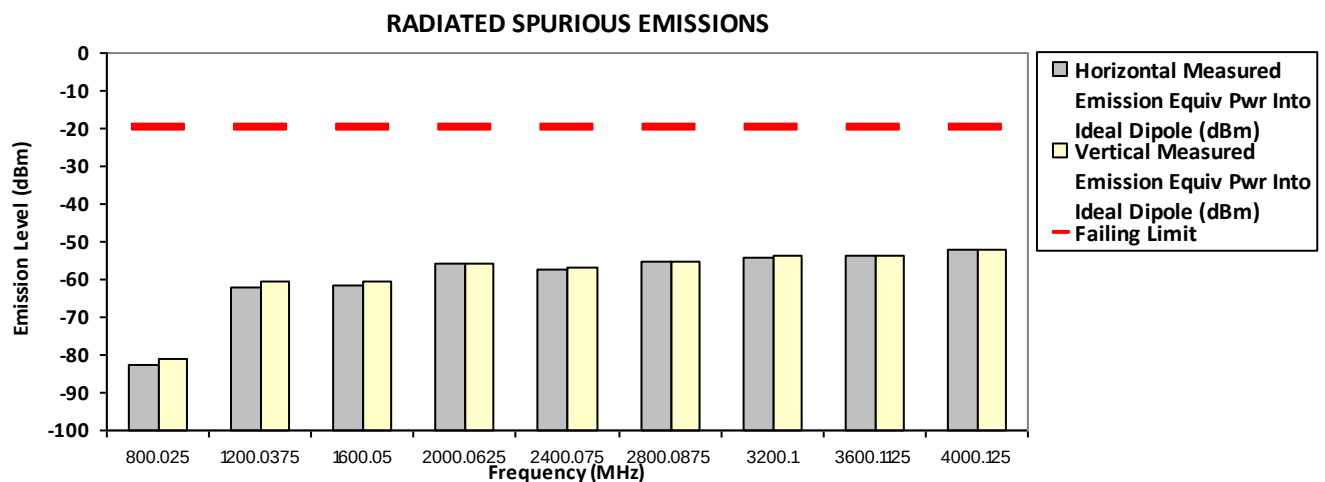

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:

Passed Results

Marginal Results

Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

S/N: 902EAB7509

SR:0645P00-EMC-00004
Accy Part No: NA


SAC Transmitter Radiated Emission

Test Mode: TX Digital
12.5 kHz

406.20000 MHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-83.0289 **	-82.5339 **
1218.6000	-20.0000	-62.6407 **	-62.2532 **
1624.8000	-20.0000	-61.0396 **	-59.8640 **
2031.0000	-20.0000	-55.4679 **	-56.5013 **
2437.2000	-20.0000	-57.5921 **	-57.2916 **
2843.4000	-20.0000	-55.5105 **	-55.9868 **
3249.6000	-20.0000	-53.7029 **	-53.2569 **
3655.8000	-20.0000	-53.8457 **	-53.8279 **
4062.0000	-20.0000	-51.4894 **	-50.4097 **

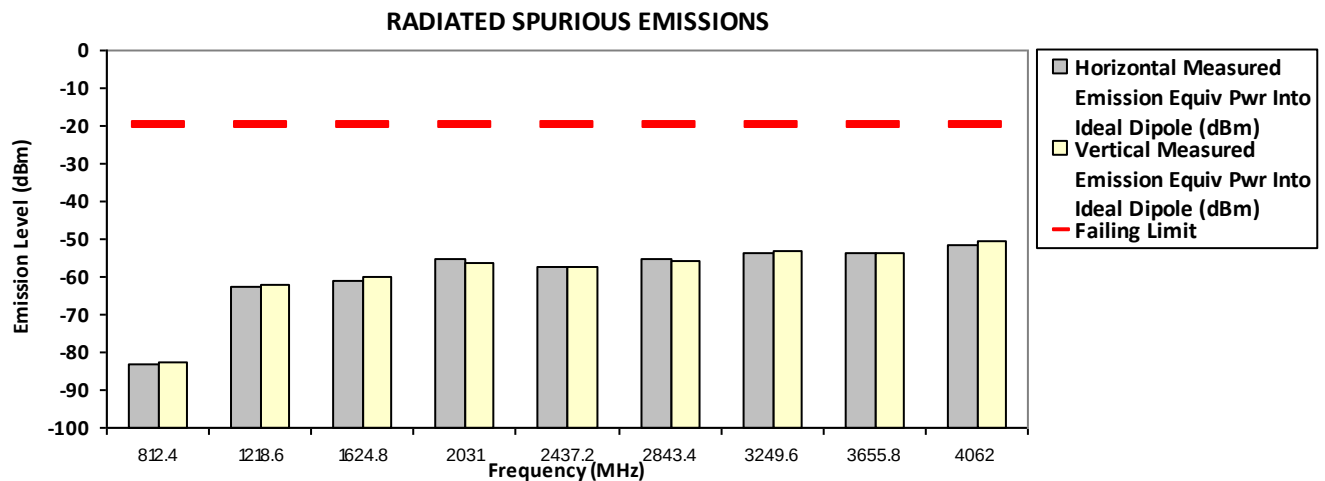

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A
SAC Transmitter Radiated Emission
S/N: 902EAB7509

SR:0645P00-EMC-00004
Accy Part No: NA

450.02500 MHz
Test Mode: TX Digital
12.5 kHz
1.00 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-82.3071 **	-81.1659 **
1350.0750	-20.0000	-60.1079 **	-58.7331 **
1800.1000	-20.0000	-60.3908 **	-60.0153 **
2250.1250	-20.0000	-56.6343 **	-56.9422 **
2700.1500	-20.0000	-56.9230 **	-56.4090 **
3150.1750	-20.0000	-53.1232 **	-53.1139 **
3600.2000	-20.0000	-52.9641 **	-53.3353 **
4050.2250	-20.0000	-50.3281 **	-50.9156 **
4500.2500	-20.0000	-51.6368 **	-51.2616 **

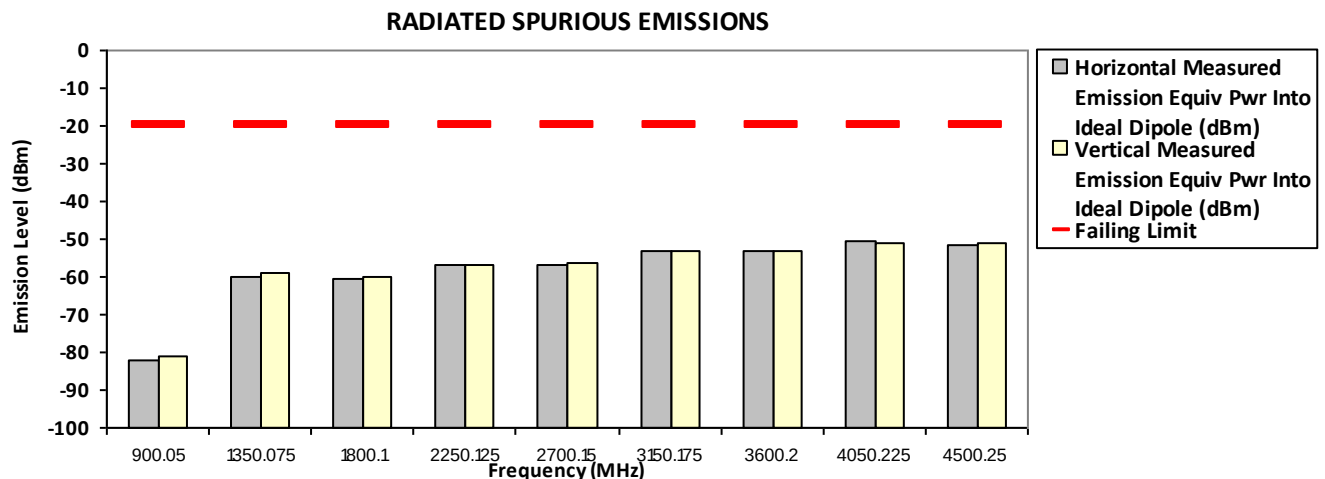

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin
Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

450.02500 MHz

Test Mode: TX Digital
12.5 kHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-82.3203 **	-81.9098 **
1350.0750	-20.0000	-61.2830 **	-58.8140 **
1800.1000	-20.0000	-59.1648 **	-60.3074 **
2250.1250	-20.0000	-57.0330 **	-56.8223 **
2700.1500	-20.0000	-55.9618 **	-56.2924 **
3150.1750	-20.0000	-52.4291 **	-53.1948 **
3600.2000	-20.0000	-52.0363 **	-53.7694 **
4050.2250	-20.0000	-50.2650 **	-50.1040 **
4500.2500	-20.0000	-51.1112 **	-50.7910 **

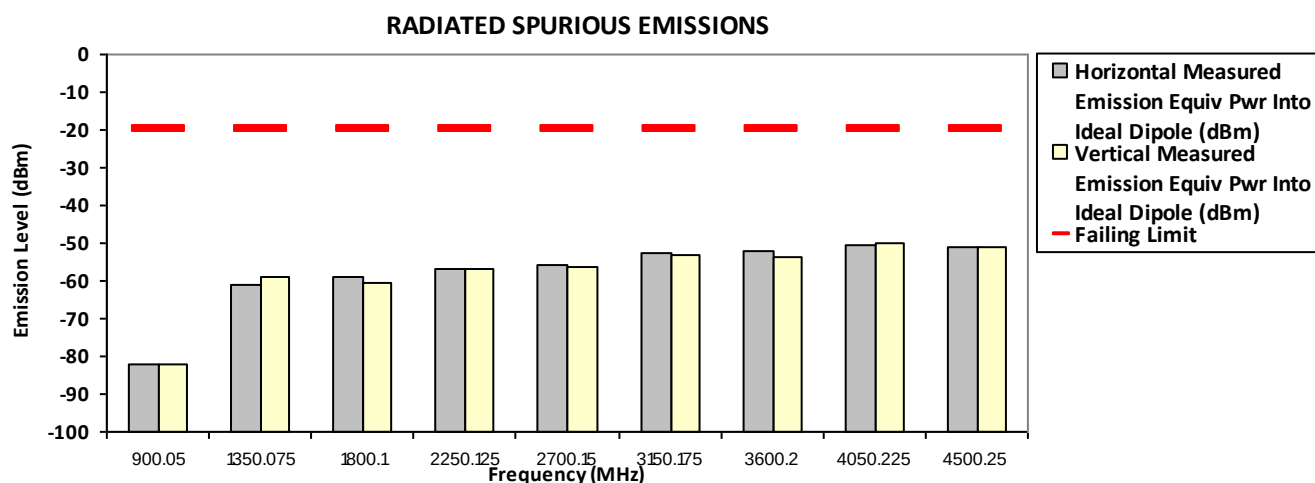

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Tue, 13 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:

Passed Results

Marginal Results

Failed Results

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

S/N: 902EAB7509

SR:0645P00-EMC-00004
Accy Part No: NA


SAC Transmitter Radiated Emission

Test Mode: TX Digital
12.5 kHz

459.12500 MHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-80.9889 **	-82.5460 **
1377.3750	-20.0000	-58.6900 *	-54.0300 *
1836.5000	-20.0000	-58.4203 **	-60.7213 **
2295.6250	-20.0000	-56.0767 **	-56.8182 **
2754.7500	-20.0000	-55.1439 **	-54.6376 **
3213.8750	-20.0000	-51.6283 **	-52.6806 **
3673.0000	-20.0000	-52.6218 **	-52.5426 **
4132.1250	-20.0000	-51.0672 **	-51.4568 **
4591.2500	-20.0000	-49.3028 **	-50.4974 **

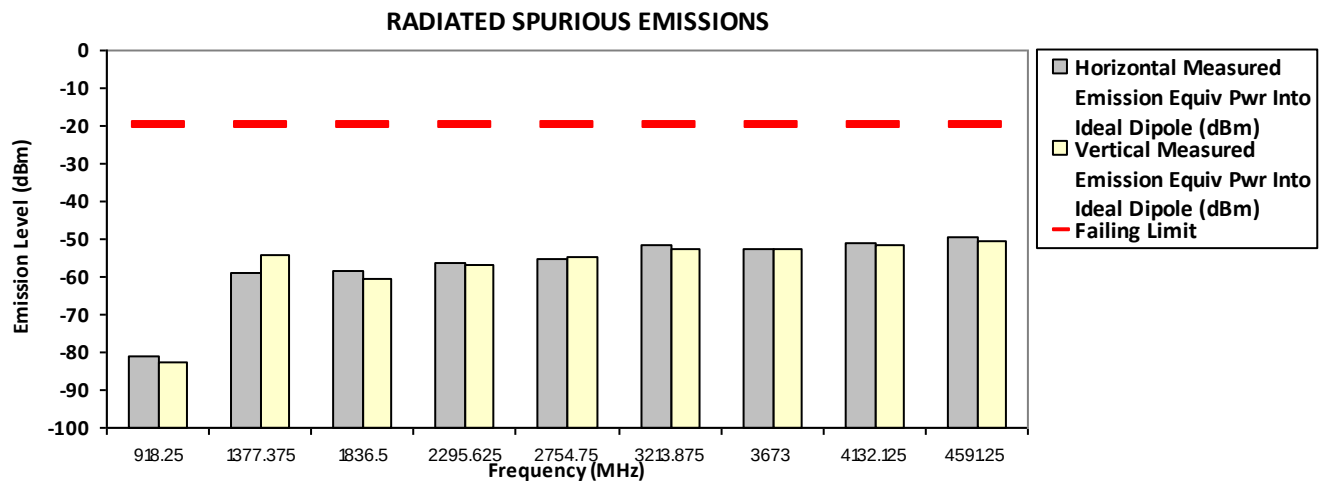

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

Test Mode: TX Digital
12.5 kHz

467.77500 MHz

1.00 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-81.3008 **	-80.8295 **
1403.3250	-20.0000	-58.4600 *	-52.4000 *
1871.1000	-20.0000	-59.7887 **	-59.4777 **
2338.8750	-20.0000	-56.7676 **	-56.8430 **
2806.6500	-20.0000	-54.9369 **	-55.2957 **
3274.4250	-20.0000	-52.9094 **	-52.1518 **
3742.2000	-20.0000	-52.7506 **	-53.0859 **
4209.9750	-20.0000	-51.1957 **	-51.4588 **
4677.7500	-20.0000	-50.5928 **	-50.6934 **

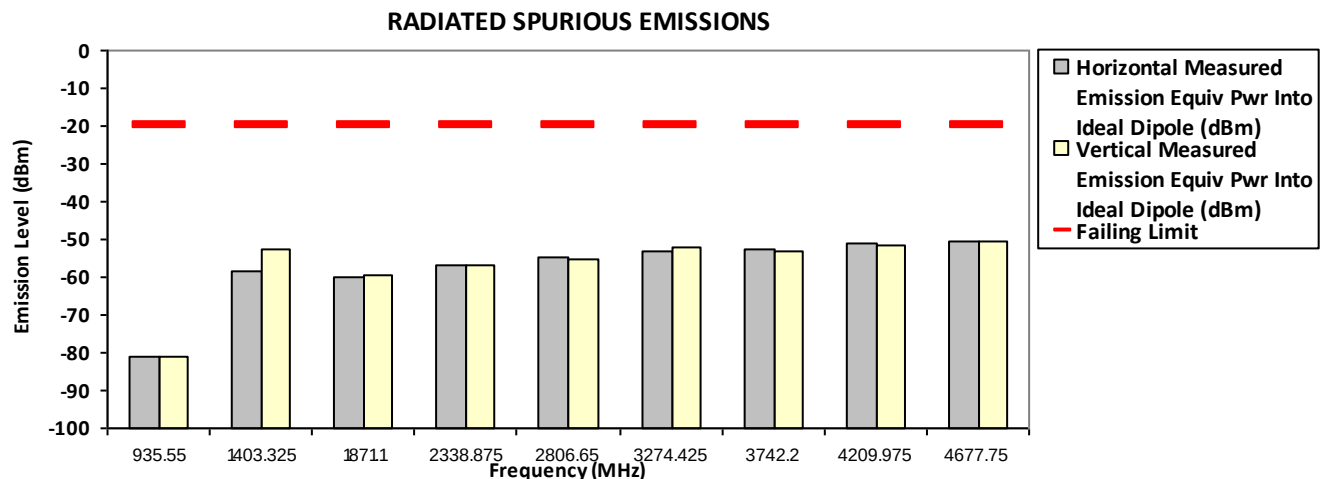

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Model Number: AAH11YDC9JA2AN
Battery Part No: PMNN4598A

SAC Transmitter Radiated Emission
S/N: 902EAB7509


SR:0645P00-EMC-00004
Accy Part No: NA

467.77500 MHz

Test Mode: TX Digital
12.5 kHz

4.800 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-81.7380 **	-79.6890 **
1403.3250	-20.0000	-58.7000 *	-53.2600 *
1871.1000	-20.0000	-59.8493 **	-59.9282 **
2338.8750	-20.0000	-58.2424 **	-57.4426 **
2806.6500	-20.0000	-55.4238 **	-55.4640 **
3274.4250	-20.0000	-53.0186 **	-52.7068 **
3742.2000	-20.0000	-52.9257 **	-53.0900 **
4209.9750	-20.0000	-50.4993 **	-50.6305 **
4677.7500	-20.0000	-49.6862 **	-50.6587 **

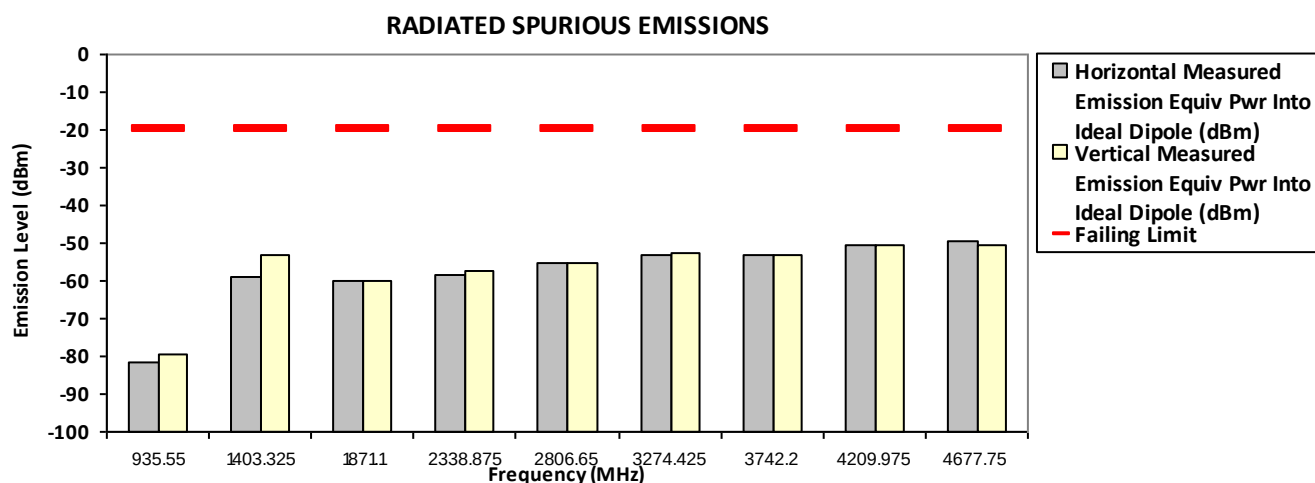

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin

Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAH11YDC9JA2AN **SAC Transmitter Radiated Emission** **S/N:** 902EAB7509 **SR:**0645P00-EMC-00004
Battery Part No: PMNN4598A **Test Mode:** TX Digital **Accy Part No:** NA
467.77500 MHz **12.5 kHz** **4.800 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-20.0000	-80.9430 **	-82.0116 **
1409.9625	-20.0000	-58.6700 *	-53.2200 *
1879.9500	-20.0000	-59.5080 **	-59.2290 **
2349.9375	-20.0000	-57.5416 **	-56.8507 **
2819.9250	-20.0000	-56.2286 **	-56.1877 **
3289.9125	-20.0000	-51.7851 **	-53.1712 **
3759.9000	-20.0000	-52.3992 **	-51.7629 **
4229.8875	-20.0000	-49.3337 **	-50.0028 **
4699.8750	-20.0000	-50.7149 **	-50.2385 **

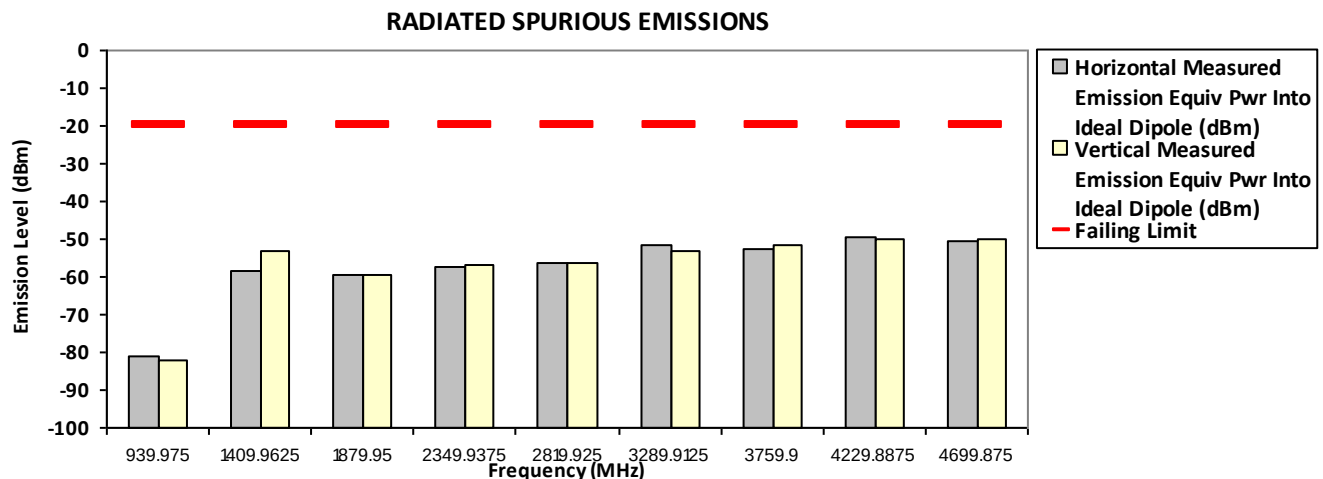

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Zharif & Nazrin Mon, 12 Feb, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Effective Radiated Power (ERP)

6.11.1. Test Setup

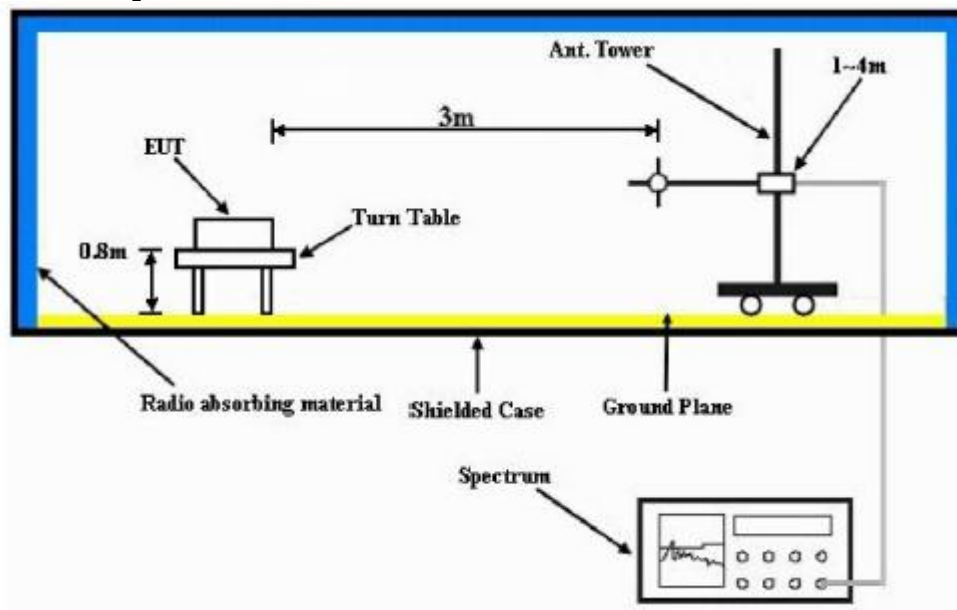

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


6.11.2. Test Result
Not Applicable

6.11.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB).
Power is given in terms of effective radiated power (ERP).

6.12. GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

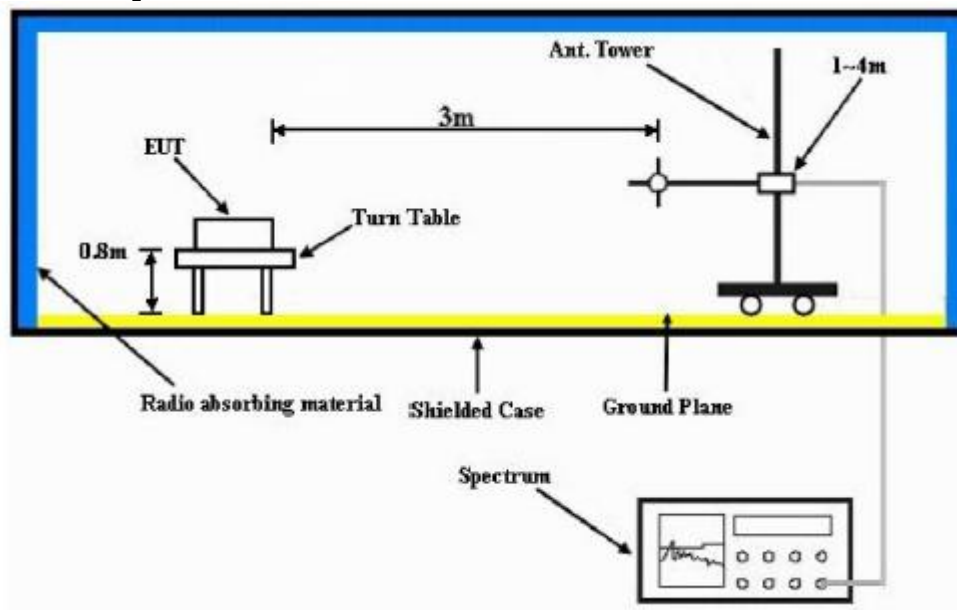

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.1. Test Result
Not Applicable

6.12.2. Test Limit
For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~