



MOTOROLA PENANG ADV. COMM. LABORATORY

Motorola Solutions Malaysia Sdn Bhd
Innoplex Plot 2A, Medan Bayan Lepas,
Mukim 12 S.W.D, 11900 Bayan Lepas,
Penang, Malaysia.

FCC / IC TEST REPORT

Report Revision : Rev.B

Date/s Tested : 15-AUG-2016 - 01-SEP-2016
Report Issue Date : 03-APR-2017
Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd
Requestor : AARON ISAACS
Product Type : Mobile
Model Number : M22KSS9PW1AN
Frequency Band : 136MHz-174 MHz
Low / Max RF Output Power : 1.0 Watts / 60 Watts
Applicant Name : Motorola Solutions Malaysia Sdn Bhd
Applicant Address : Innoplex Plot 2A, Medan Bayan Lepas,
Mukim 12 S.W.D, 11900 Bayan Lepas,
Penang, Malaysia
FCC Registrations : 772092
IC Registrations : 109AK



The equipment was tested accordance to the requirement listed below:

(LMR)
FCC 47 CFR Part 22 / 74 / 80
IC RSS-182

PASS

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

Prepared By:

Approved By:

Edmond Too Chee Wei
Test Personnel

Goh Aik Hong
Responsible Engineer

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	5
4.0 Equipment List.....	6
5.0 Test Condition.....	8
5.1. Transmitter Test Conditions	8
6.0 Transmitter Test Parameters	9
6.1. RF Output Power	9
6.1.1. Test Setup.....	9
6.1.2. Test Result	9
6.2. Frequency Stability	10
6.2.1. Test Setup.....	10
6.2.2. Test Result	11
6.2.3. Test Limit.....	12
6.3. Audio Frequency Response	13
6.3.1. Test Setup.....	13
6.3.2. Test Result	13
6.3.3. Test Limit.....	13
6.4. Audio Low Pass Filter Response	14
6.4.1. Test Setup.....	14
6.4.2. Test Result	14
6.4.3. Test Limit.....	15
6.5. Modulation Limiting.....	16
6.5.1. Test Setup.....	16
6.5.2. Test Result	16
6.5.3. Test Limit.....	16
6.6. Occupied Bandwidth.....	17
6.6.1. Test Setup (Analog)	17
6.6.2. Test Result (Analog).....	18
6.6.3. Test Setup (Digital).....	21
6.6.4. Test Result (Digital).....	22
6.6.5. Test Limit.....	23
6.7. Band Edge Conducted Spurious Emission (Part 22)	24
6.7.1. Test Setup (Analog)	24
6.7.1. Test Result (Analog).....	25
6.7.2. Test Setup (Digital).....	26
6.7.3. Test Result (Digital).....	27
6.7.4. Test Limit.....	27

6.8.	Transient Frequency Behavior	28
6.8.1.	Test Setup.....	28
6.8.2.	Test Result	28
6.8.3.	Test Limit.....	29
6.9.	Adjacent Channel Power.....	30
6.9.1.	Test Setup (Analog)	30
6.9.2.	Test Result	30
6.9.3.	Test Setup (Digital).....	31
6.9.4.	Test Result	31
6.9.5.	Test Limit.....	32
6.10.	Conducted Spurious Emission	34
6.10.1.	Test Setup.....	34
6.10.2.	Test Result (Analog)	34
6.10.3.	Test Result (Digital).....	34
6.10.4.	Test Limit.....	34
6.11.	Radiated Spurious Emission	35
6.11.1.	Test Setup.....	35
6.11.2.	Test Result (Analog)	36
6.11.3.	Test Result (Digital).....	44
6.11.4.	Test Limit.....	52
6.12.	Effective Radiated Power (ERP) / GNSS (EIRP for 1559 – 1610MHz).....	53
6.12.1.	Test Setup.....	53
6.12.2.	Test Result	53
6.12.3.	Test Limit.....	53
6.13.	AC Power Line Conducted Spur Emissions	54
6.13.1.	Test Setup.....	54
6.13.2.	Test Result	54
6.13.3.	Test Limit.....	55

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial report	19-JAN-2017	Tan Chee Eu
Rev. B	Added note on 6.6.4	09-MAR-2017	Tan Chee Eu
Rev. C	Updated statement on band edge emission.	03-APR-2017	Edmond Too Chee Wei

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI/TIA/-603-D
ANSI C63.4.2014
TIA-102 CCAA-A
TIA-102 CAAB-D
TIA-102 CAAA-D
ANSI C63.26-2015

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	IC General Rules Part	Test Item	Result
2.1046(a), 22.565(f), 74.461, 80.215	RSS-Gen, RSS-182 (7.5)	RF Power Output	Pass
2.1055, 22.355, 74.464, 80.209(a)(5)	RSS-Gen, RSS-182(7.4)	Frequency Stability	Pass
-	-	Audio Frequency Response	NA
-	-	Audio Low Pass Filter Response	NA
-	-	Modulation limiting	NA
2.1049, 22.359, 74.462(b), 80.211(c), (f)	RSS-Gen, RSS-182 (7.9)	Occupied Bandwidth	Pass
22.359(a),(b)	-	Band Edge Conducted Spurious Emission	Pass
-	-	Transient Frequency Behavior	NA
-	-	Adjacent Channel Power	NA
-	-	Conducted Spurious Emissions	NA
2.1051, 22.359, 74.462(c), 80.211(c)	RSS-Gen, RSS-182 (7.9)	Radiated Spurious Emission	Pass
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA
-	-	Effective Radiated Power (ERP)	NA
-	-	AC Power Line Conducted Spurious Emission	NA

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

FCC Analog ATE#1: (SW Version: Analog ATE_Rev 2.4.0 & FCC_FreqStability_Rev1.0.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SIGNAL GENERATOR	E4425B	US39260201	14-Apr-16	14-Apr-17
AUDIO ANALYZER	8903B	3011A10475	13-Apr-16	13-Apr-17
MODULATION ANALYZER	8901B	3216A03889	13-Apr-16	13-Apr-17
POWER METER	E4416A	GB41293855	22-Apr-16	22-Apr-17
POWER SUPPLY	6031A	3325A02771	19-Apr-16	19-Apr-17
POWER SENSOR	E4412A	MY41502652	21-Apr-16	21-Apr-17
SIGNAL GENERATOR	2042	203002/747	14-Apr-16	14-Apr-17
SIGNAL GENERATOR	2042	203002/745	14-Apr-16	14-Apr-17
TRANSCEIVER INTERFACE	8954A	2234A00398	12-Apr-16	12-Apr-17
CHAMBER	SH-641	92014678	1-Apr-16	31-Mar-17
RF TRANSCEIVER CONTROLLER	AX2007AI	AX2007AI007	CNR	CNR
DYNAMIC SIGNAL ANALYZER	35670A	MY42506781	15-Apr-16	15-Apr-17

FCC Transient ATE #1: (SW Version: FCC Transient ATE_R1.0.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6032A	2723A02219	19-Apr-16	19-Apr-17
POWER SENSOR	E4412A	MY41498918	21-Jun-16	21-Jun-17
POWER METER	E4416A	GB41293866	21-Apr-16	21-Apr-17
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY52300223	16-Jun-16	16-Jun-17
STEP ATTENUATOR/110dB	8496G	MY52300176	15-Jun-16	15-Jun-17
OSCILLOSCOPE	MSO8064A	MY48240107	26-Apr-16	26-Apr-17
AUDIO ANALYZER	8903B	3729A17409	14-Apr-16	14-Apr-17
AUDIO ANALYZER	8903B	3011A08952	18-Apr-16	18-Apr-17
MODULATION ANALYZER	8901B	3019A02766	13-Apr-16	13-Apr-17
SIGNAL GENERATOR	8657A	3323A05725	13-Apr-16	13-Apr-17
SPECTRUM ANALYZER	E4440A	MY46185415	22-Apr-16	22-Apr-17
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1: (SW Version: Conducted Spur ATE_rev1.22.05)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
SPECTRUM ANALYZER	E4440A	US45303111	14-Apr-16	14-Apr-17
POWER SUPPLY	6031A	3319A08920	19-Apr-16	19-Apr-17
HIGH PASS FILTER SWITCH BOX	CS	CS001	22-May-16	22-May-17
ESG VECTOR SIGNAL GENERATOR	E4438C	MY49070717	6-Sep-16	6-Sep-17
MODULATION ANALYZER	8901B	3438A05278	12-Apr-16	12-Apr-17

Radiated Emission Station: (SW Version: EMC_FCC_IC_BT_RE_V1.4.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	10-Nov-14	10-Nov-16
DRG HORN FREQ.	SAS-571	719	28-Apr-15	28-Apr-17
BILOG ANTENNA	CBL6112B	2964	23-Jan-15	23-Jan-17
POWER SUPPLY	6031A	3121A02341	24-Feb-15	24-Feb-17
MICROWAVE SIGNAL GENERATOR	SMP04	100131	4-Jul-16	4-Jul-17
TEST RECEIVER	ESIB40	100264	1-Jul-16	1-Jul-17
SIGNAL ANALYZER	FSV40	101103	25-Jun-16	25-Jun-17
5m Semi-anechoic Chamber	S800-HX	J2308	29-Jul-16	29-Jul-17
BILOG ANTENNA	CBL6112D	25516	23-Jan-16	23-Jan-17
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	24-Nov-14	24-Nov-16
DATA LOGGER	TM320	12249289	27-Apr-16	27-Apr-17
POWER SUPPLY	6032A	3232A08417	20-Apr-15	20-Apr-17
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	CNR	CNR
PREAMPLIFIER	PAM-0118	427	CNR	CNR

CNR → Calibration Not Required

5.0 Test Condition

5.1. Transmitter Test Conditions

Test Item, (Channel Spacing)	Temperature (°C)	Voltage Supply (V)	Power (W)	Modulation	Test Frequency (MHz)
RF Output Power	25°C	Nominal	Low / Max	Analog	158.550, 161.700
Frequency Stability	-30°C ~ 60°C	80% ~ 120% of Nominal Volt	Max	Analog	158.550
Audio Frequency Response (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Audio Low Pass Filter Response (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Modulation limiting (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	158.550, 161.700
Band Edge Conducted Spurious Emission (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	157.770, 158.670
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	NA
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	NA
Conducted Spurious Emissions (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	NA
Radiated Spurious Emission (12.5kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	158.550, 161.700
GNSS (700MHz Band) (EIRP for 1559-1610MHz) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
Effective Radiated Power (ERP) (700MHz & 900MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	NA
AC Power Line Conducted Spurious Emissions* (12.5kHz)	25°C	Nominal	Max	Analog	NA


* – ONLY tested if portables can be operated during charging OR mobiles can be used in desktop operation connected to a power supply

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

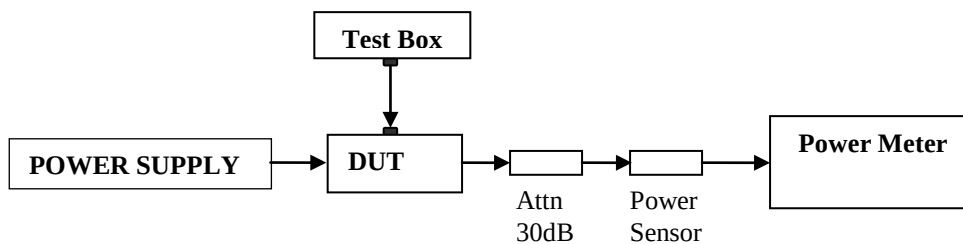


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C			
Voltage (V)	7.5V			
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)
158.55000	0.97	1.91	59.90	8.50
161.70000	0.97	1.91	59.10	8.51

6.2. Frequency Stability

6.2.1. Test Setup

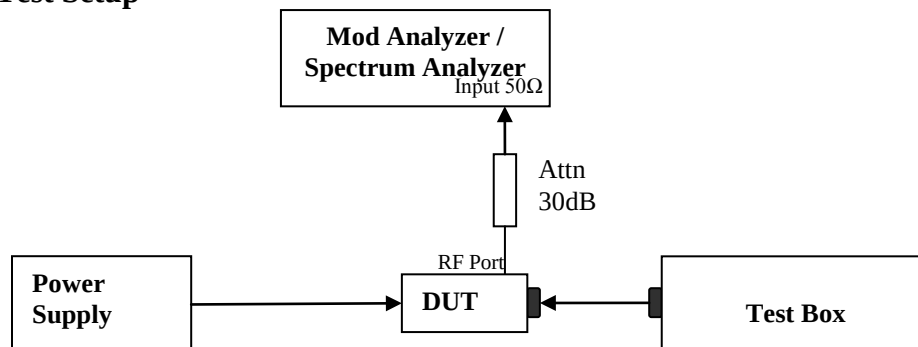


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions: Different Temperature & Supply Voltage input.
 - Temperature: Vary voltage per test condition in Clause 5.1
 - Supply Voltage: Vary temperature per test condition in Clause 5.1
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

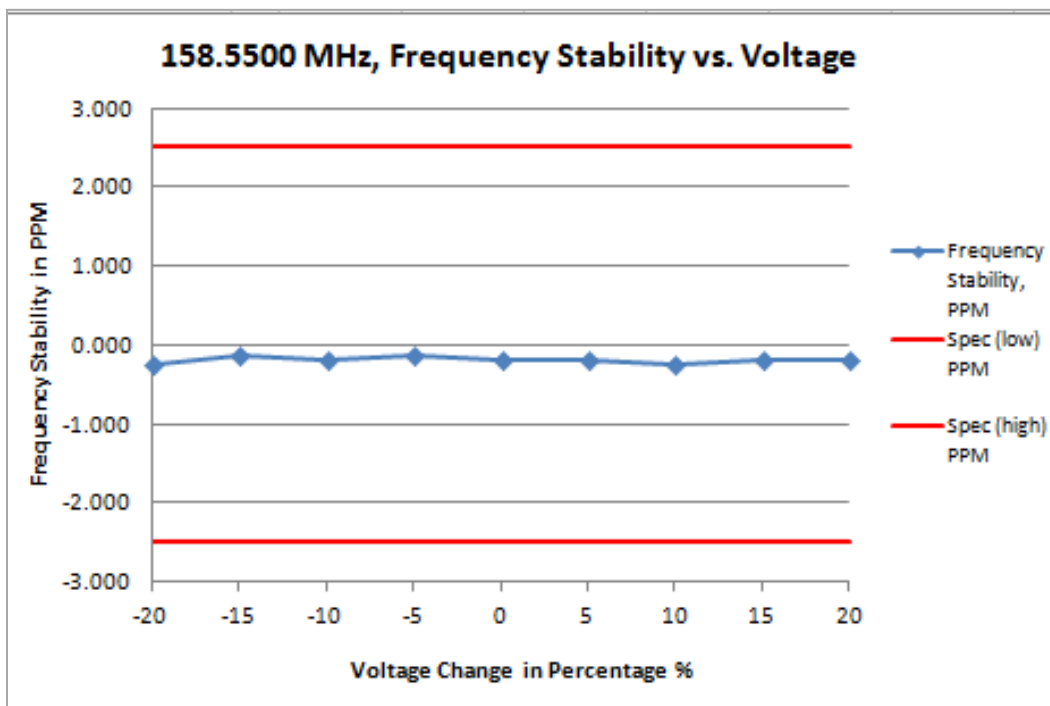

Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	158.549960	-0.252	-2.500	2.500
-15	11.560	158.549980	-0.126	-2.500	2.500
-10	12.240	158.549970	-0.189	-2.500	2.500
-5	12.920	158.549980	-0.126	-2.500	2.500
0	13.600	158.549970	-0.189	-2.500	2.500
5	14.280	158.549970	-0.189	-2.500	2.500
10	14.960	158.549960	-0.252	-2.500	2.500
15	15.640	158.549970	-0.189	-2.500	2.500
20	16.320	158.549970	-0.189	-2.500	2.500

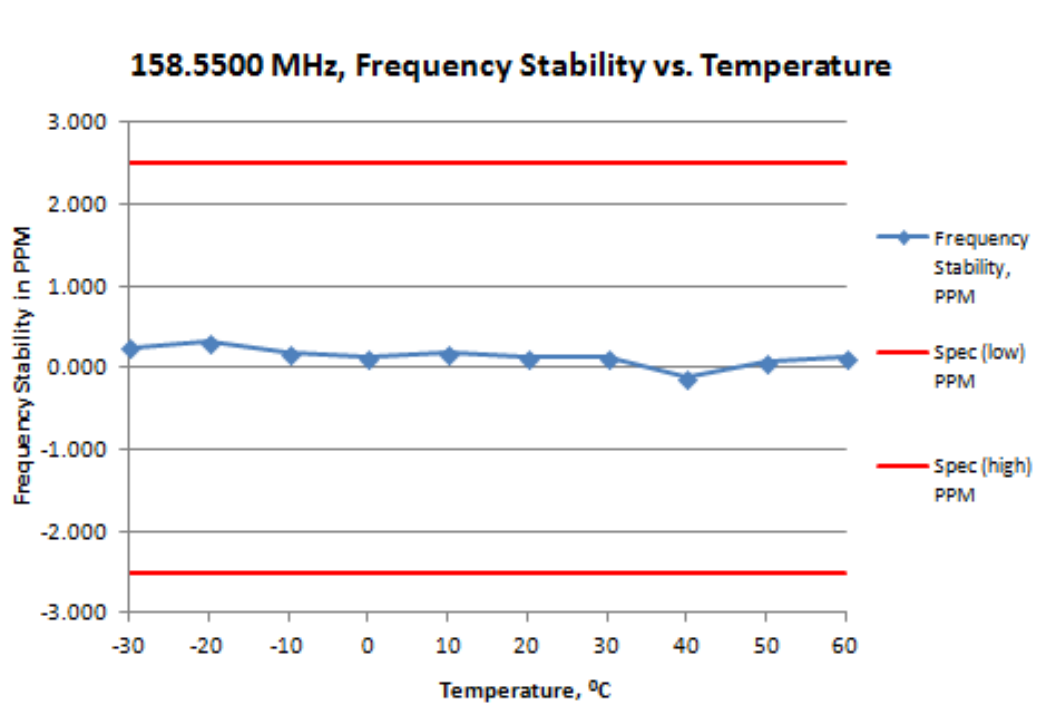


Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	158.550040	0.252	-2.500	2.500
-20	158.550050	0.315	-2.500	2.500
-10	158.550030	0.189	-2.500	2.500
0	158.550020	0.126	-2.500	2.500
10	158.550030	0.189	-2.500	2.500
20	158.550020	0.126	-2.500	2.500
30	158.550020	0.126	-2.500	2.500
40	158.549980	-0.126	-2.500	2.500
50	158.550010	0.063	-2.500	2.500
60	158.550020	0.126	-2.500	2.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 2.5ppm

6.3. Audio Frequency Response


6.3.1. Test Setup

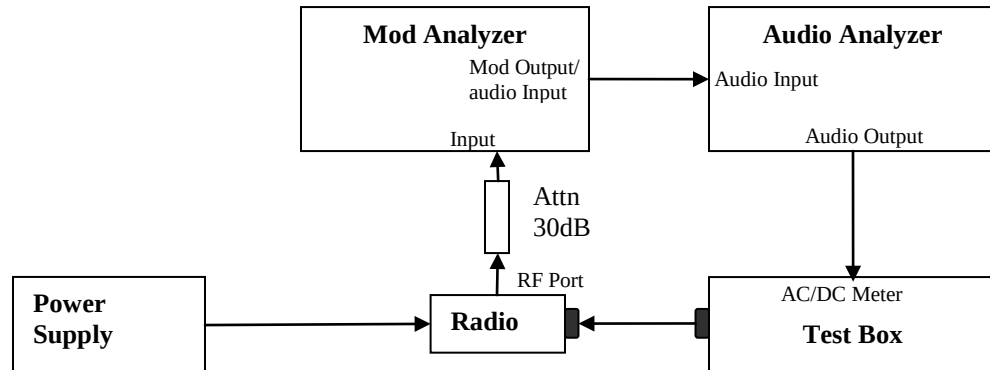

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the maximum deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result Not Applicable

6.3.3. Test Limit

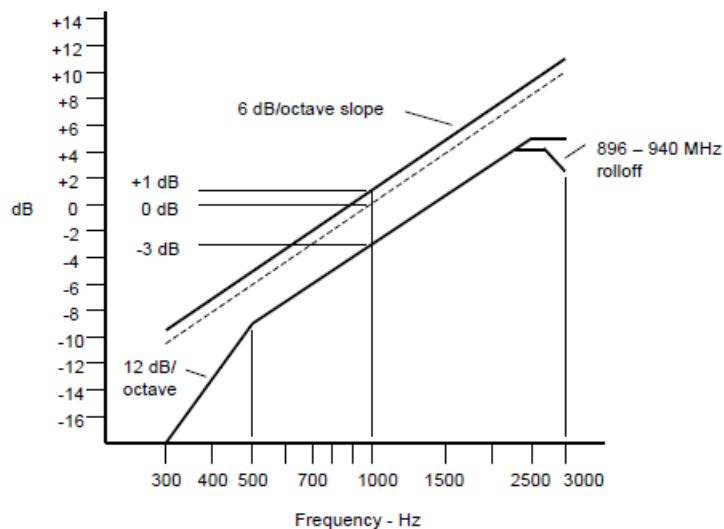


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

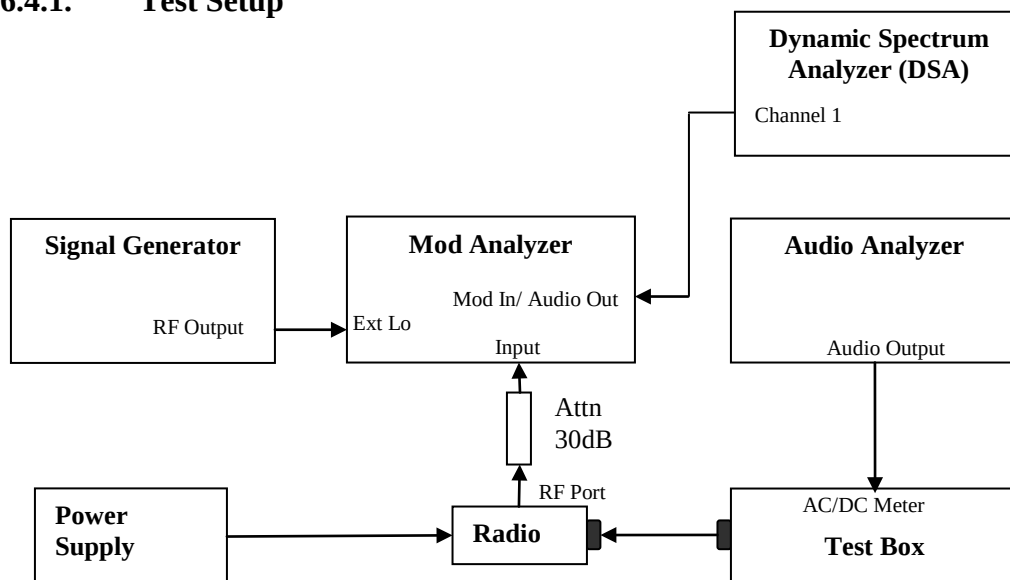


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

Not Applicable

6.4.3. Test Limit

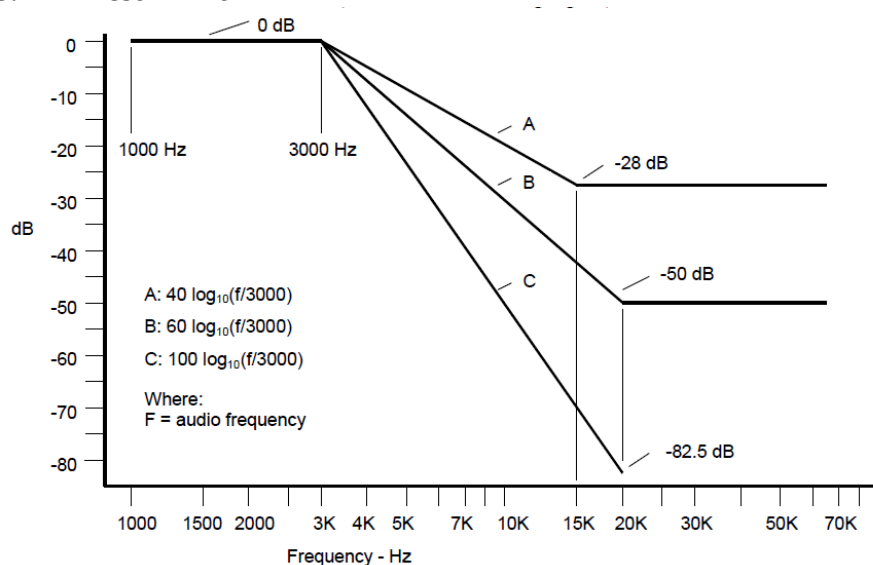

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

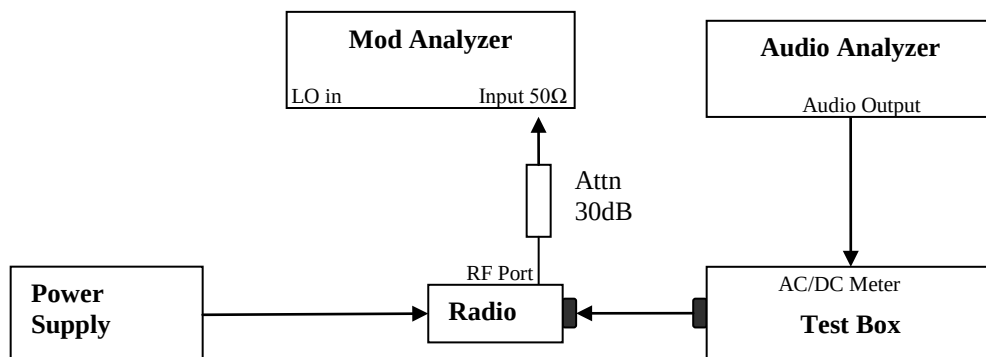

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.


6.5.2. Test Result **Not Applicable**

6.5.3. Test Limit Modulation shall not exceed 100 percent if amplitude modulation is employed.


6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

A. Get Fc for reference

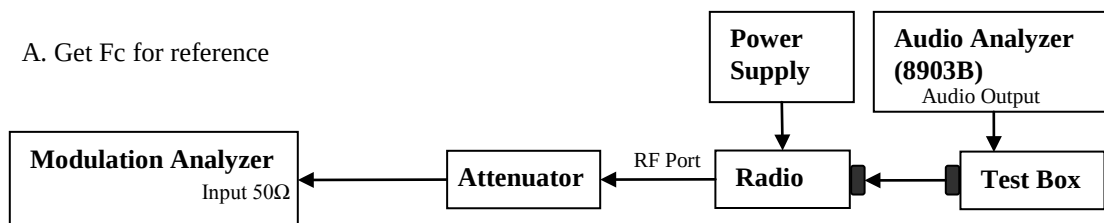



B. Testing


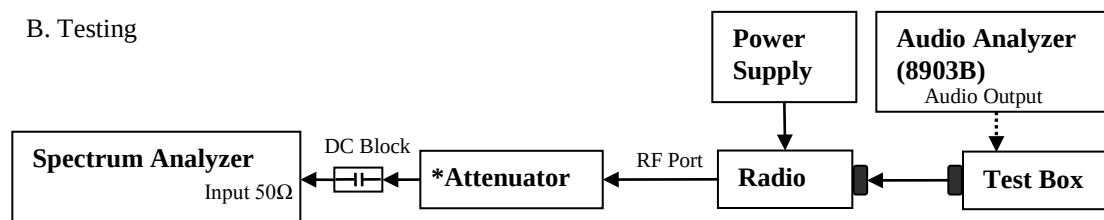



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) For 99% Emissions BW Measurement, select Measure and Occupied BW setting.
- 4) Key in the percentage of total integrated power = 99%.
- 5) Key in the Fc to assigned center frequency with the span 100 kHz and RBW accordingly.
- 6) Transmit the UUT and record the occupied BW frequency.
- 7) For Occupied BW spectrum measurement, set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 8) Set the spectrum analyzer with RBW as shown in the rules part.
- 9) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 60% of the maximum deviation.
- 10) Up the amplitude by 20 dB and remove the audio tone from audio analyzer.
- 11) Capture the screen shot with and without modulation.

* Only HPF added for Mask 80.211 measurement with attenuator.


6.6.2. Test Result (Analog)

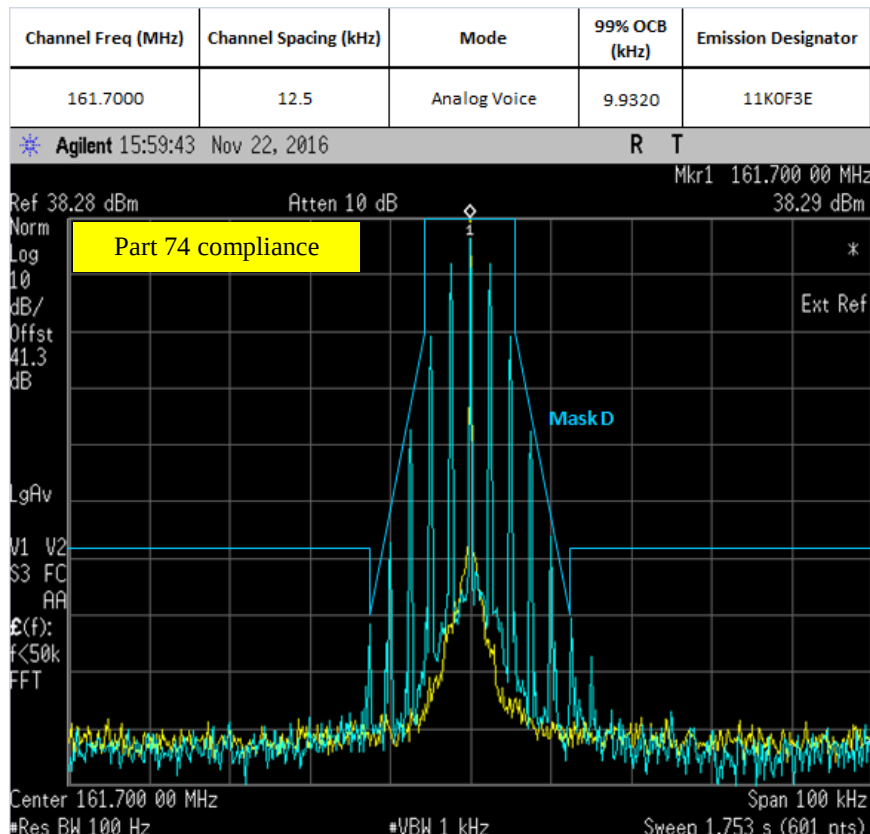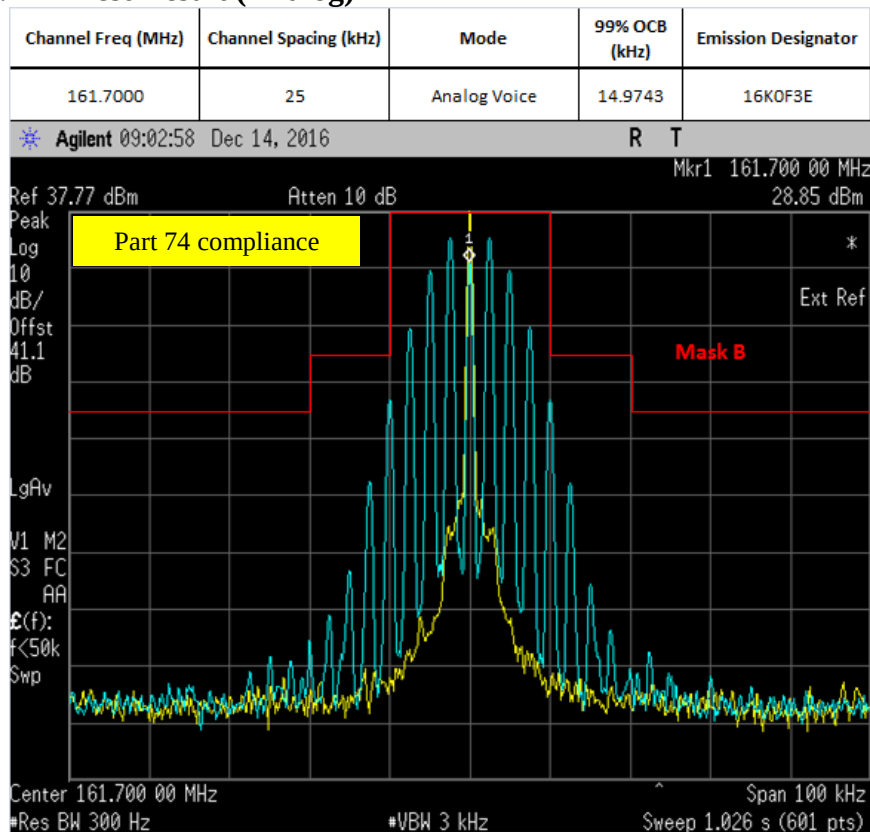

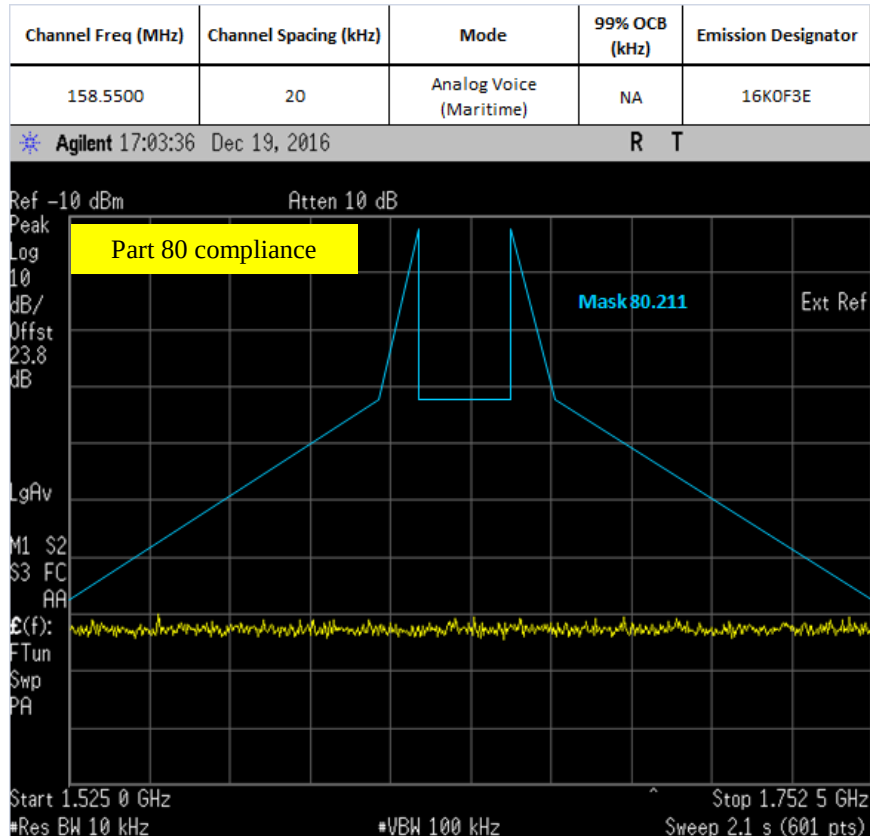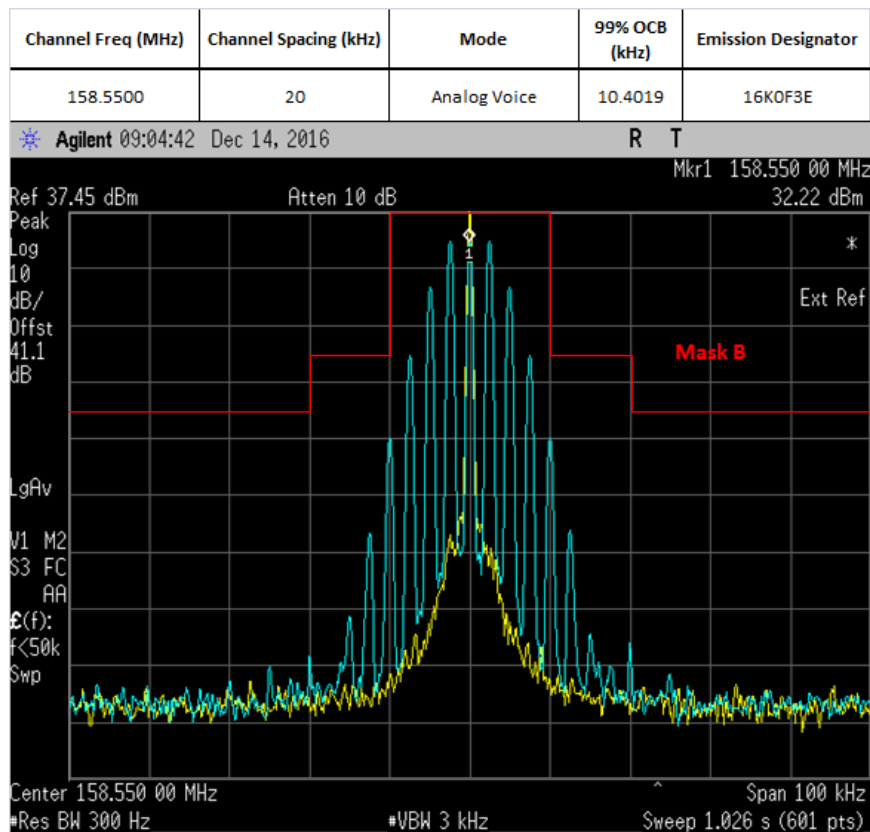


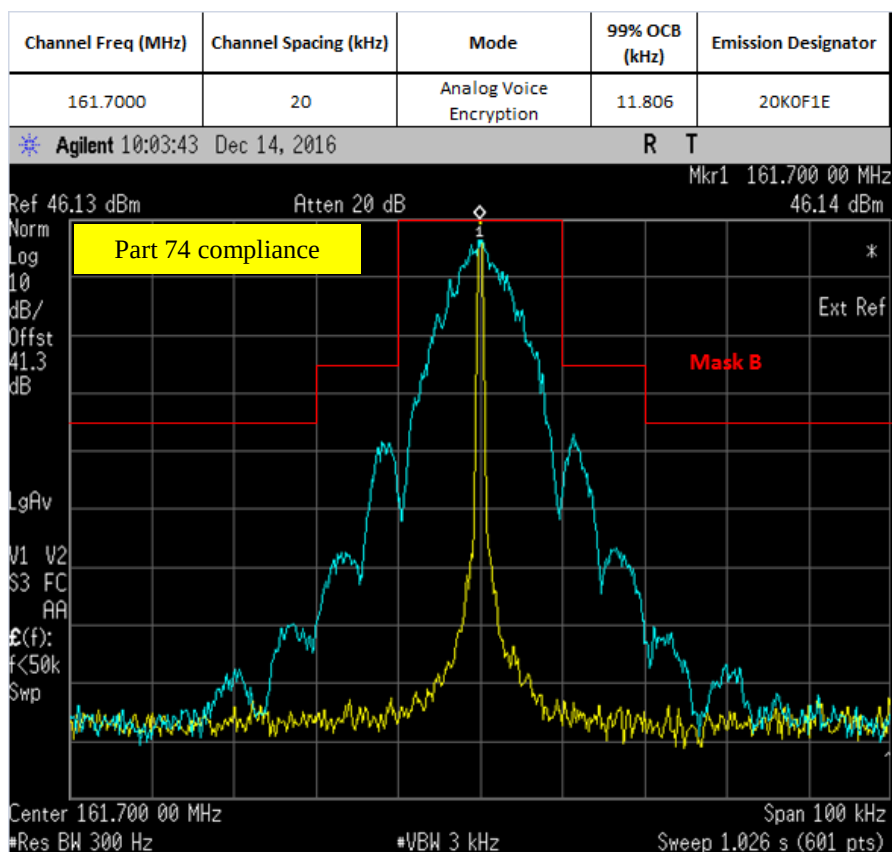



6.6.3. Test Setup (Digital)

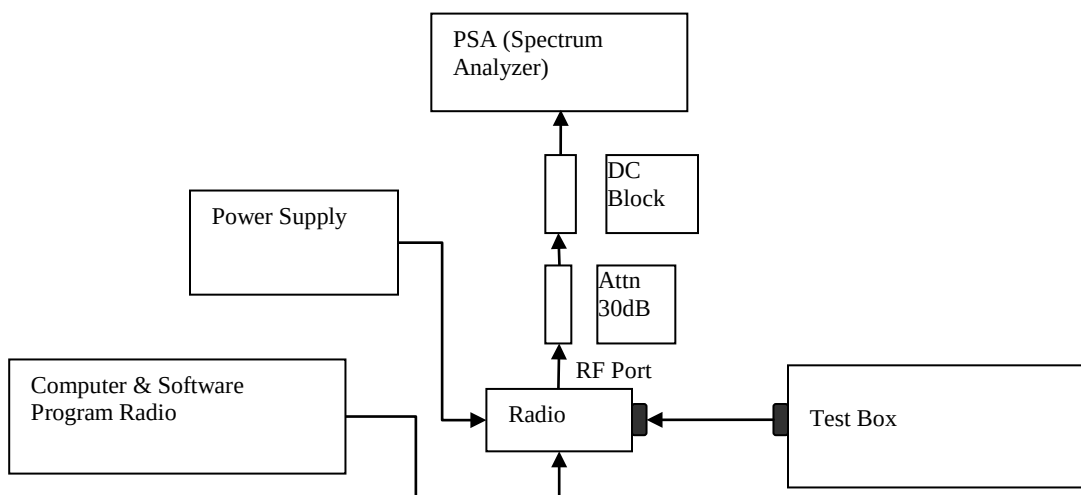

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 4) Key in the Fc and RBW (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

6.6.4. Test Result (Digital)

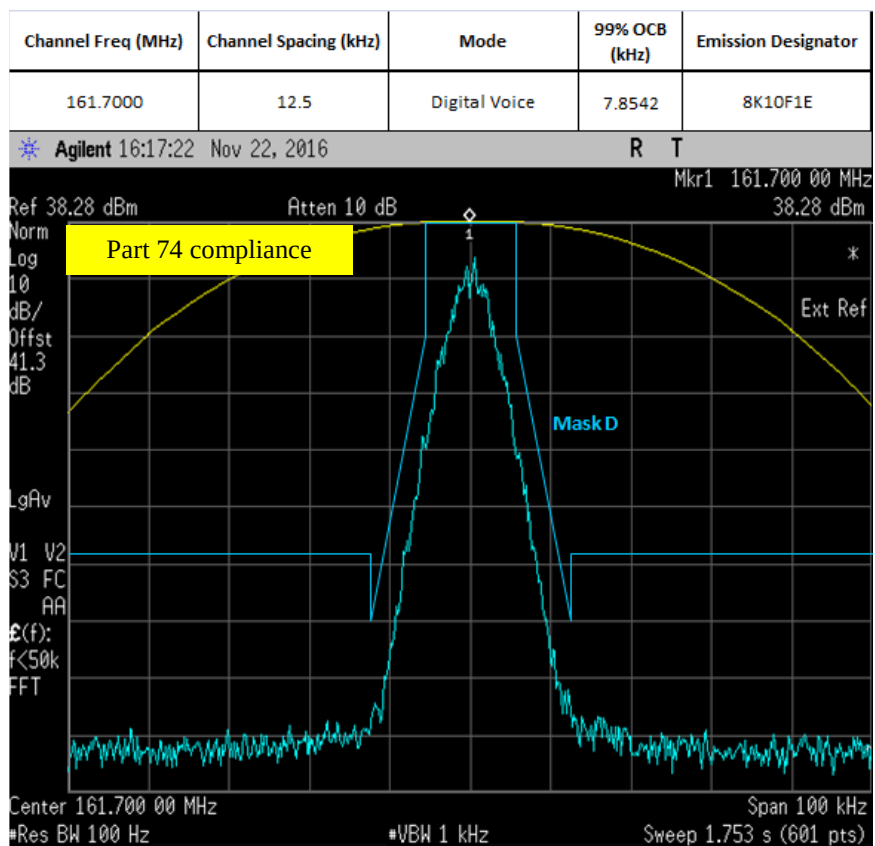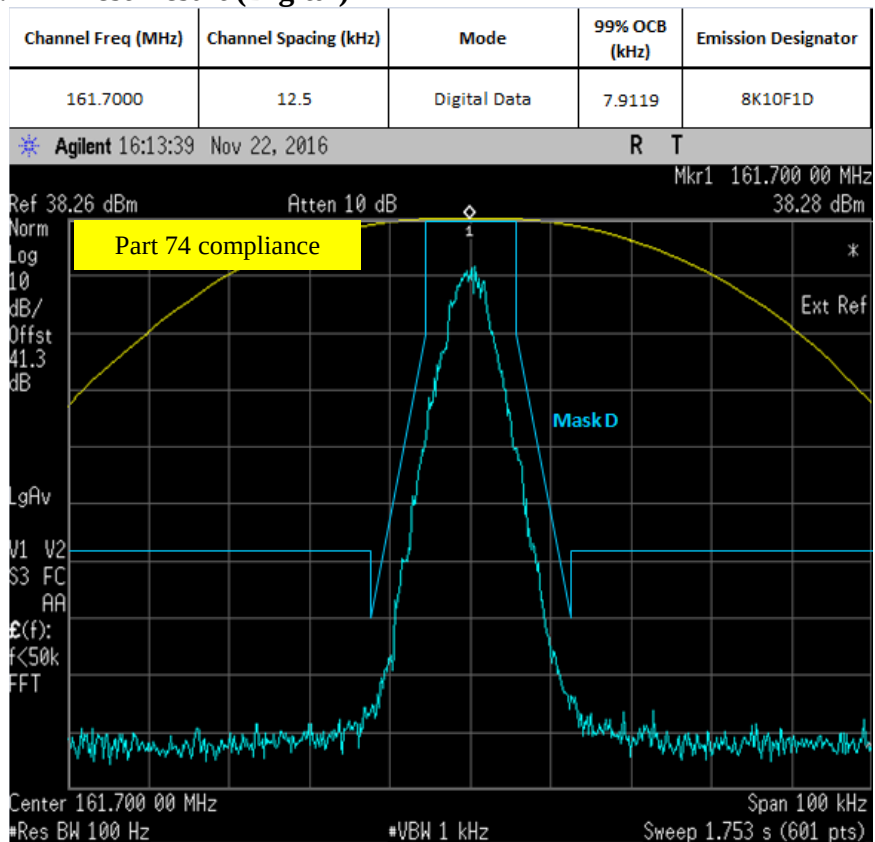

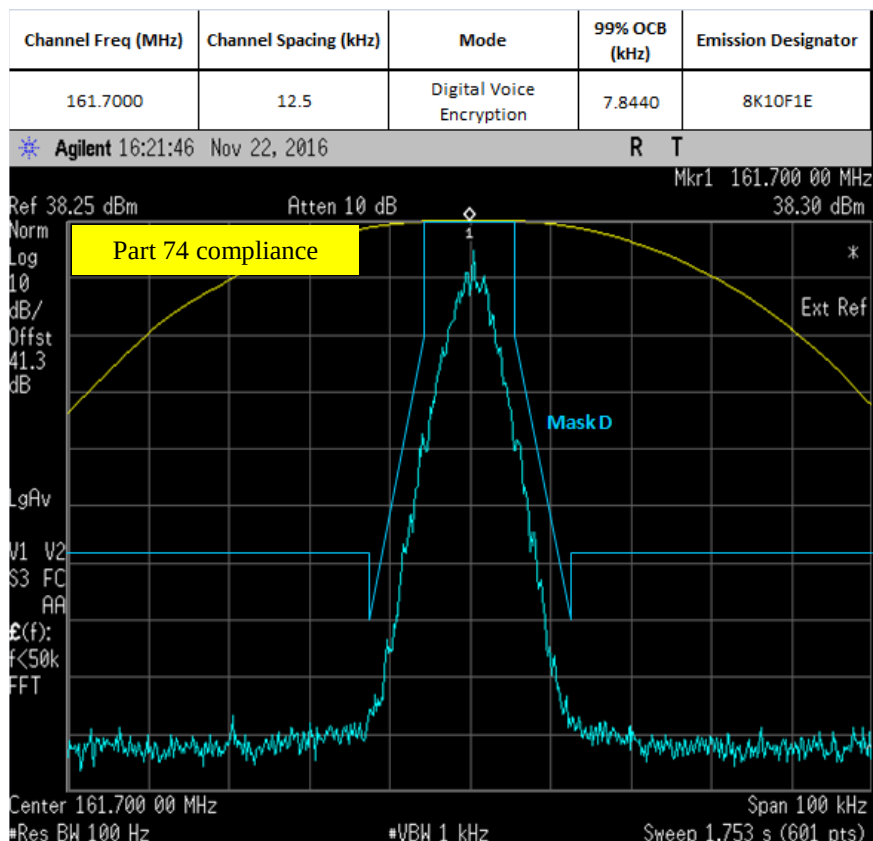


***Note: 8K10F1W waveform is identical to 8K10F1D, therefore only plot for 8K10F1D will be shown**

6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.





6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

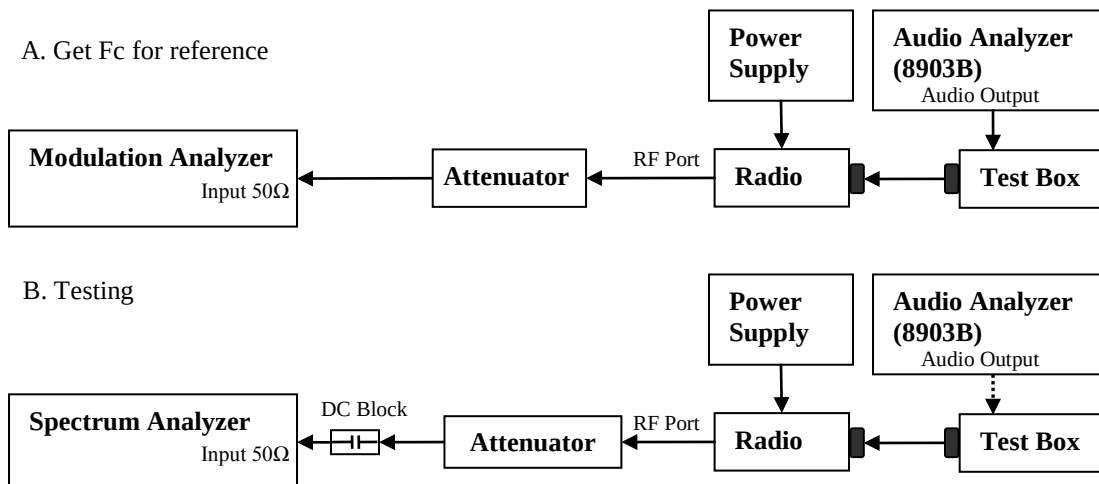

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Path loss for the measurement included.
- 4) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 5) Key in the Fc and RBW= 100Hz.
- 6) Transmit the DUT and record the occupied Bandwidth frequencies.
- 7) Preset the spectrum analyzer for band edge measurement.
- 8) The band edges of lowest and highest channels were measured.
- 9) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 10) Save the screen shot as modulated signal.
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.


6.7.1. Test Result (Analog)

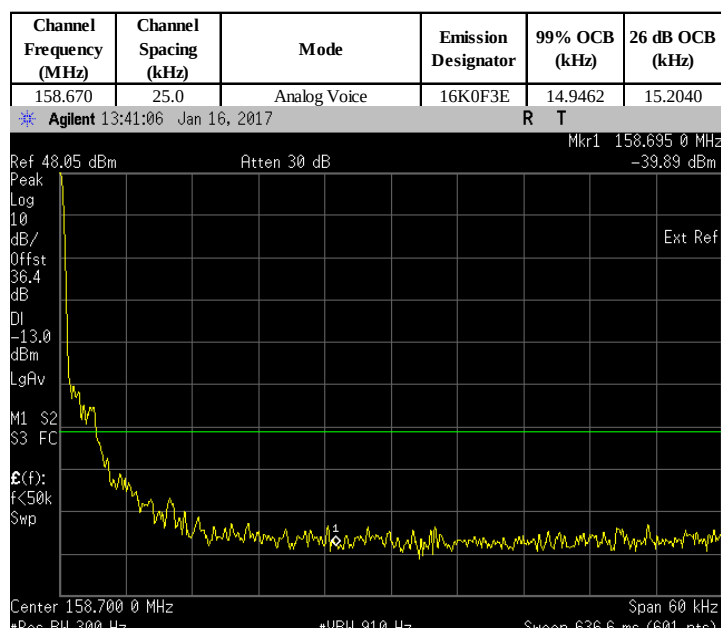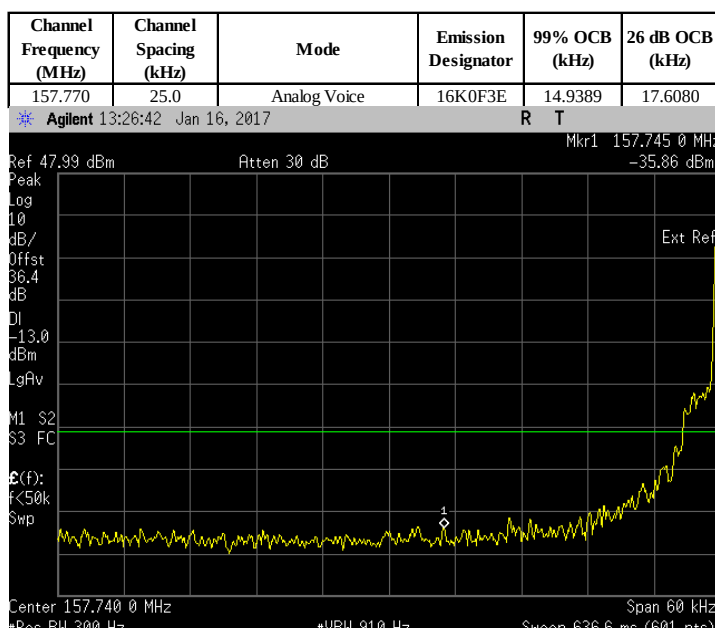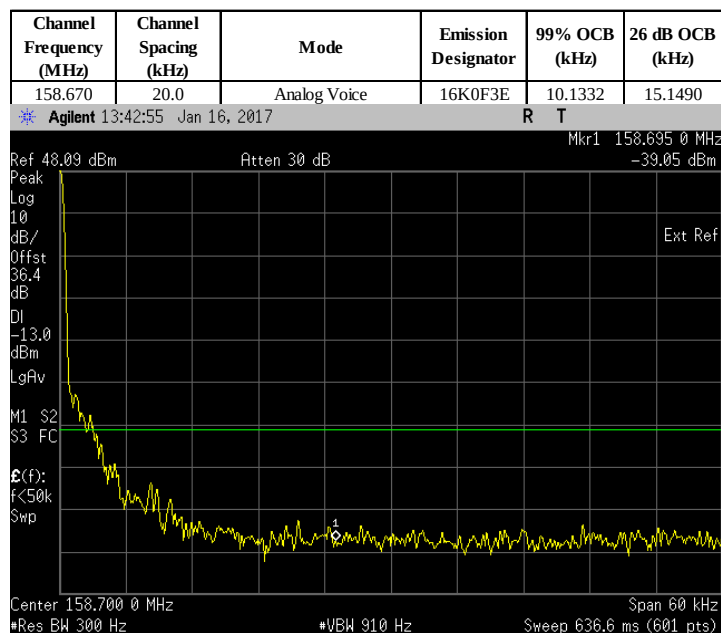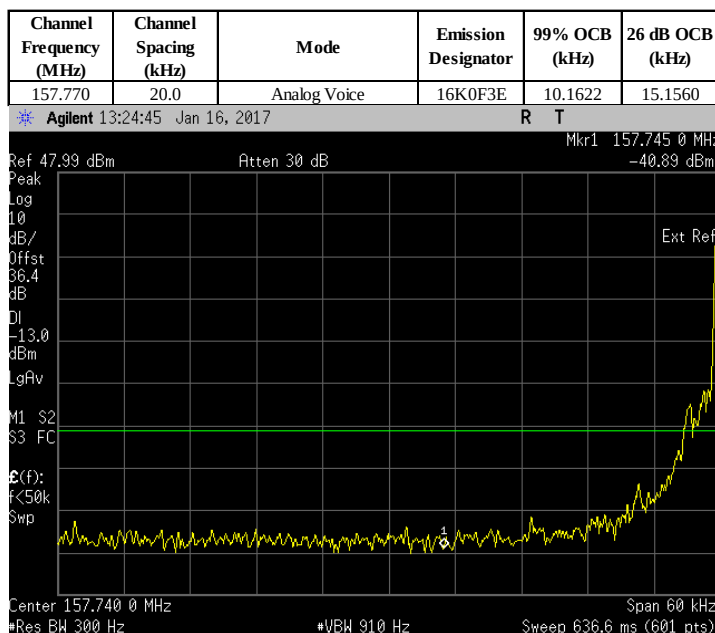

**Note:

- Results for Analog Modulation Voice (F3E) with 12.5kHz and 25kHz would be the same. Therefore only measurements with 25kHz channel spacing is reported.

6.7.2. Test Setup (Digital)

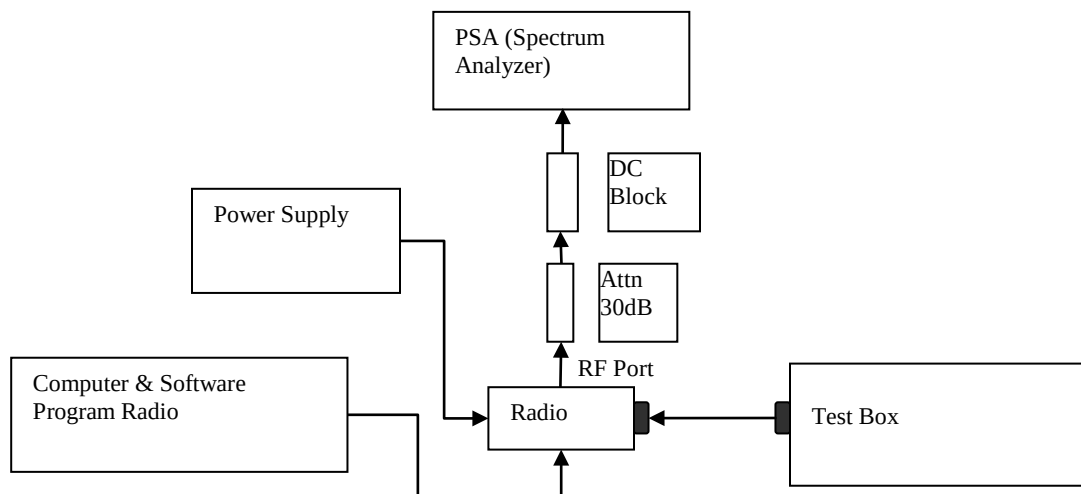


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK**, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and RBW= 100Hz.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) The band edges of lowest and highest channels were measured.
- 8) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 9) Save the screen shot.

****Note:**

- For Digital Modulation for 12.5 kHz Voice (F1E) and 12.5 kHz Data (F1D) would be the same. Therefore only measurements with F1E modulation shown below.

6.7.3. Test Result (Digital)

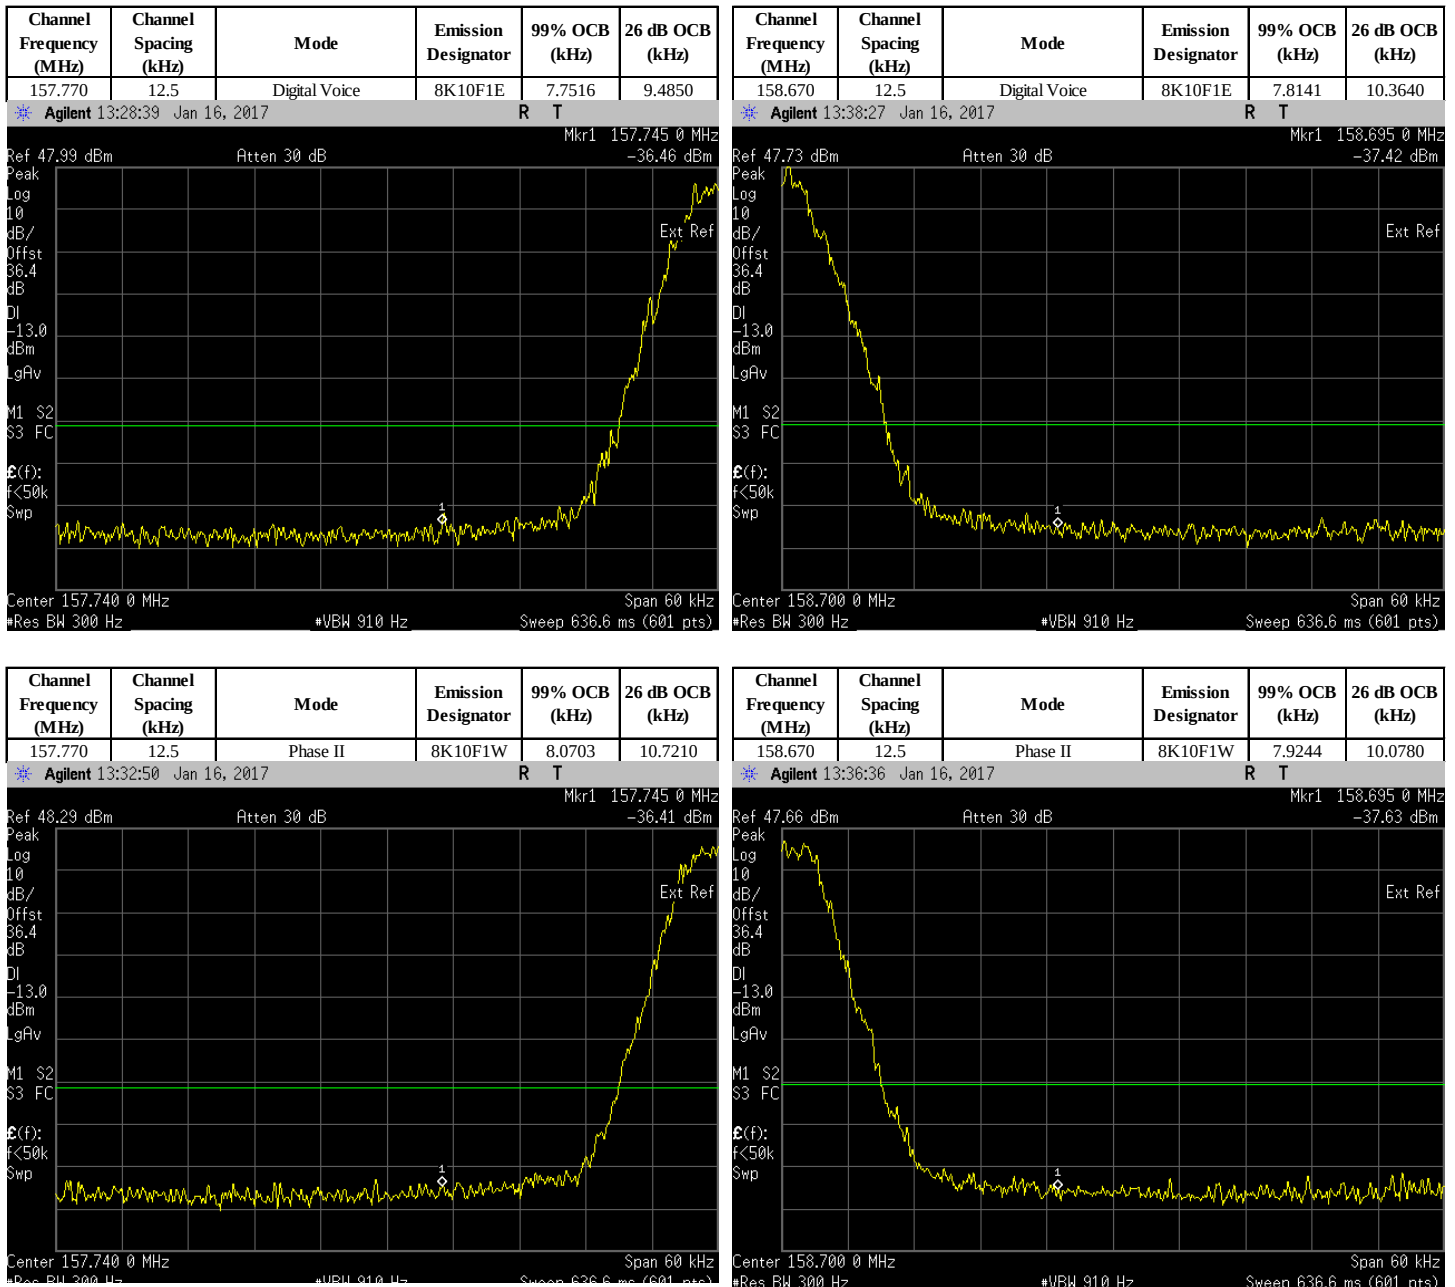


6.7.4. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.8. Transient Frequency Behavior

6.8.1. Test Setup

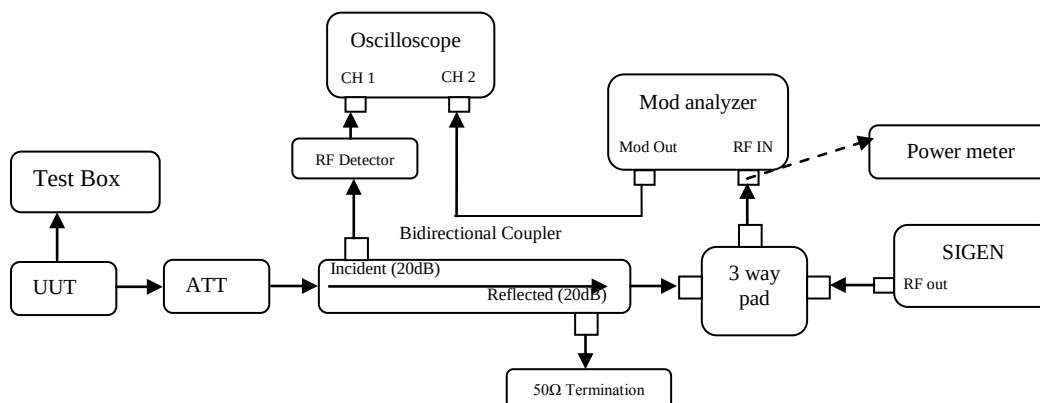

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when UUT is keying up.
- 6) Note the power level on power meter and dekey the UUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz. Adjust the vertical amplitude control of the oscilloscope to display the 1000 Hz at ☐ 4 divisions
- 10) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 11) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Not Applicable

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

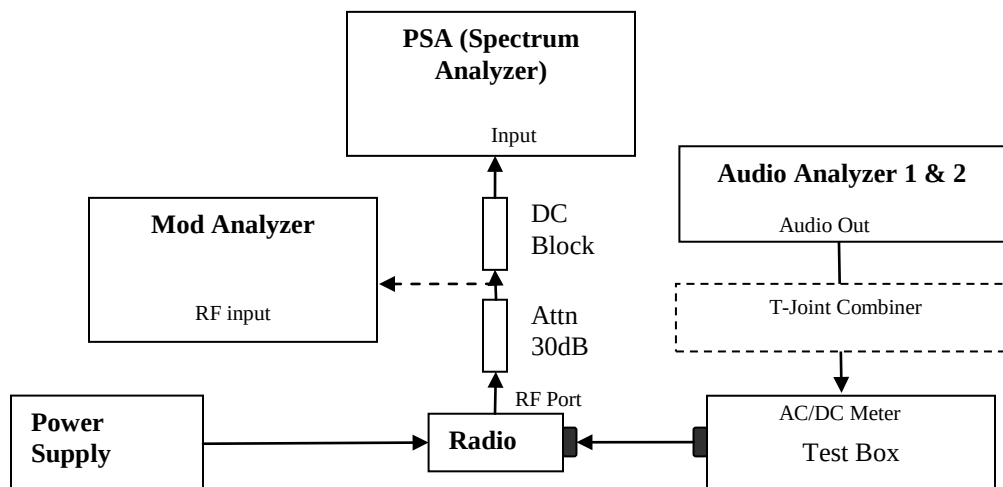


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 4) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 5) Turn both audio analyzers ON and up 10dB amplitude level.
- 6) Connect the output to PSA and set to assigned center frequency.
- 7) Set Span, RBW and VBW as shown in FCC rules part 90.534.
- 8) Transmit the radio and record the ACP value in dBc.

6.9.2. Test Result

Not Applicable

6.9.3. Test Setup (Digital)

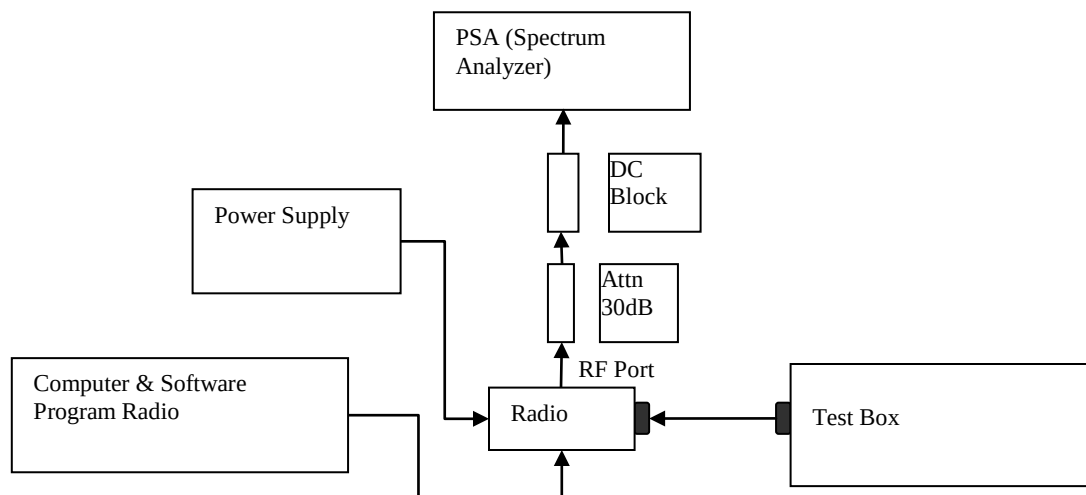

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Prepare setup as per picture.
- 4) Turn on the ACP Measurement – Press Measure, ACP.
- 5) Set Span, RBW and VBW as shown in FCC rules part 90.534.
- 6) Transmit the radio and record the ACP value in dBc.

6.9.4. Test Result

Not Applicable

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.10. Conducted Spurious Emission

6.10.1. Test Setup

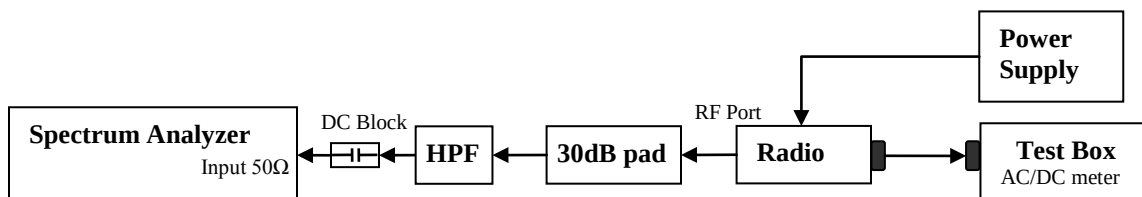

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Adjust the PSA RBW = 100kHz for spur emission below 1GHz, and 1MHz for spur emission above 1GHz.
- 4) Set the Ref offset from the pathloss offset calibration file.
- 5) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - (a) The lowest radio frequency to $F_c - \text{Test BW}$
 - (b) $F_c + \text{Test BW}$ to $\text{Freq} < 2F_c$.
- 6) Record the levels of spurious emissions and dekey the UUT.
- 7) Turn On HPF path and Key up the UUT.
- 8) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$.
- 9) The levels recorded are the absolute levels of conducted spurious emissions in dBm.

6.10.2. Test Result (Analog)

Not Applicable

6.10.3. Test Result (Digital)

Not Applicable


6.10.4. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	$43 + \log_{10}(P)$ (-13 dBm)	Not Applicable	$50 + \log_{10}(P)$ (-20 dBm)
25kHz		Not Applicable		$43 + \log_{10}(P)$ (-13 dBm)	Not Applicable

6.11. Radiated Spurious Emission

6.11.1. Test Setup

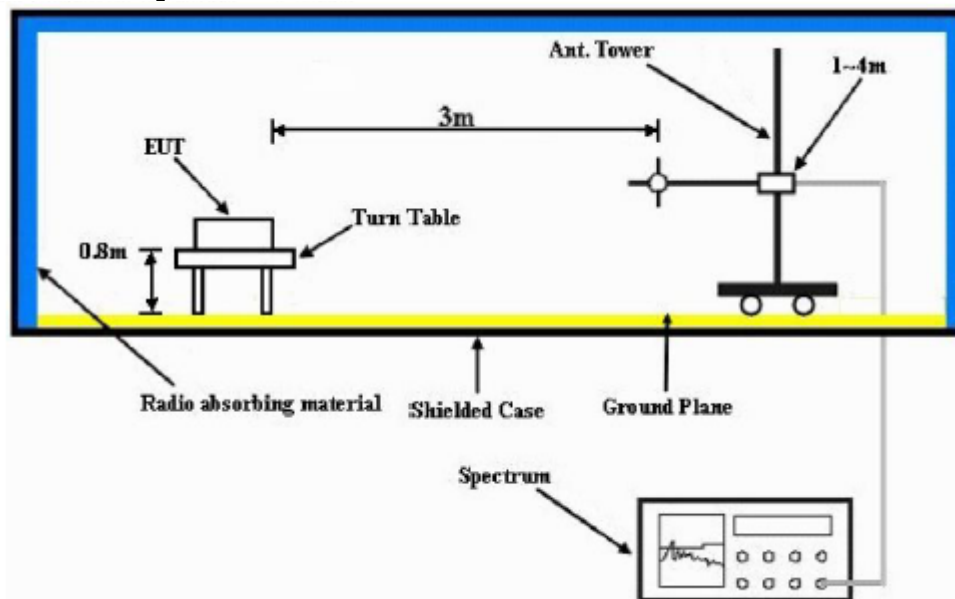

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1 MHz, VBW = 3 MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.


6.11.2. Test Result (Analog)

Model #: M22KSS9PW1AN
 Battery Part No: NA
 Test Mode: TX Analog
 158.550000 MHz 20 kHz 1.000 Watt(s) /Low Power

SAC Transmitter Radiated Emission:
 S/N: 471CSP1670
 Accy Part No: 7175-RMN5070A-1

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-100.9418 **	-100.0816 **
475.6500	-13.0000	-96.7714 **	-96.0830 **
634.2000	-13.0000	-93.3252 **	-92.7879 **
792.7500	-13.0000	-91.0542 **	-91.6630 **
951.3000	-13.0000	-89.9085 **	-91.1356 **
1109.8500	-13.0000	-62.8667 **	-63.0953 **
1268.4000	-13.0000	-61.5742 **	-62.4921 **
1426.9500	-13.0000	-62.2534 **	-62.9614 **
1585.5000	-13.0000	-62.0842 **	-60.9248 **

RADIATED SPURIOUS EMISSIONS

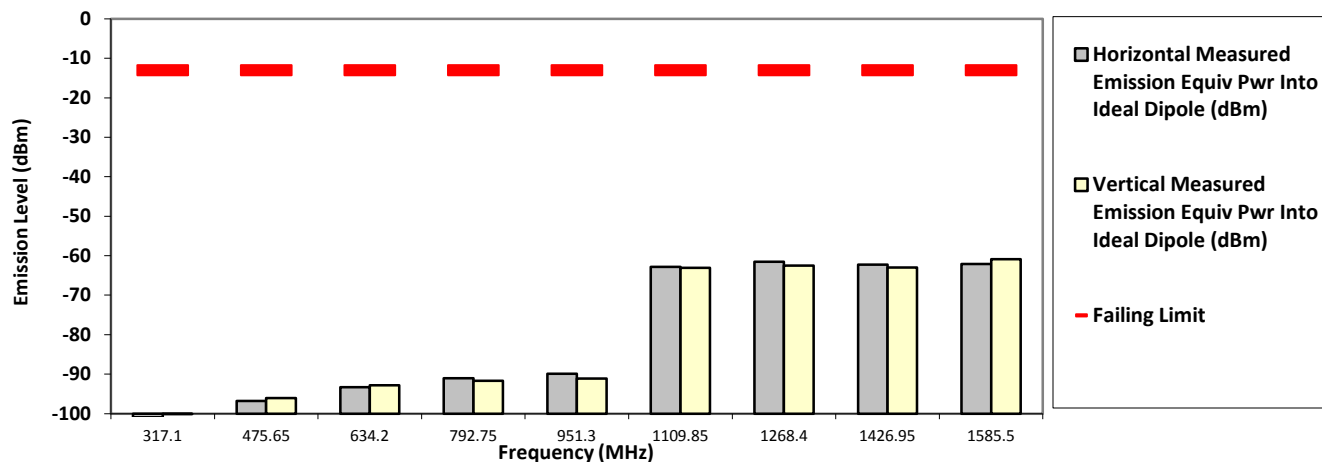

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model #: M22KSS9PW1AN

S/N: 471CSP1670

Battery Part No: NA

Accy Part No: 7175-RMN5070A-1

Test Mode: TX Analog


158.550000 MHz

20 kHz

60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-100.6678 **	-99.7438 **
475.6500	-13.0000	-96.1586 **	-95.9030 **
634.2000	-13.0000	-92.6956 **	-92.5198 **
792.7500	-13.0000	-91.2968 **	-91.8318 **
951.3000	-13.0000	-90.3382 **	-90.9768 **
1109.8500	-13.0000	-62.7404 **	-63.0326 **
1268.4000	-13.0000	-62.9865 **	-62.7580 **
1426.9500	-13.0000	-61.6816 **	-62.0579 **
1585.5000	-13.0000	-62.2985 **	-61.4880 **

RADIATED SPURIOUS EMISSIONS

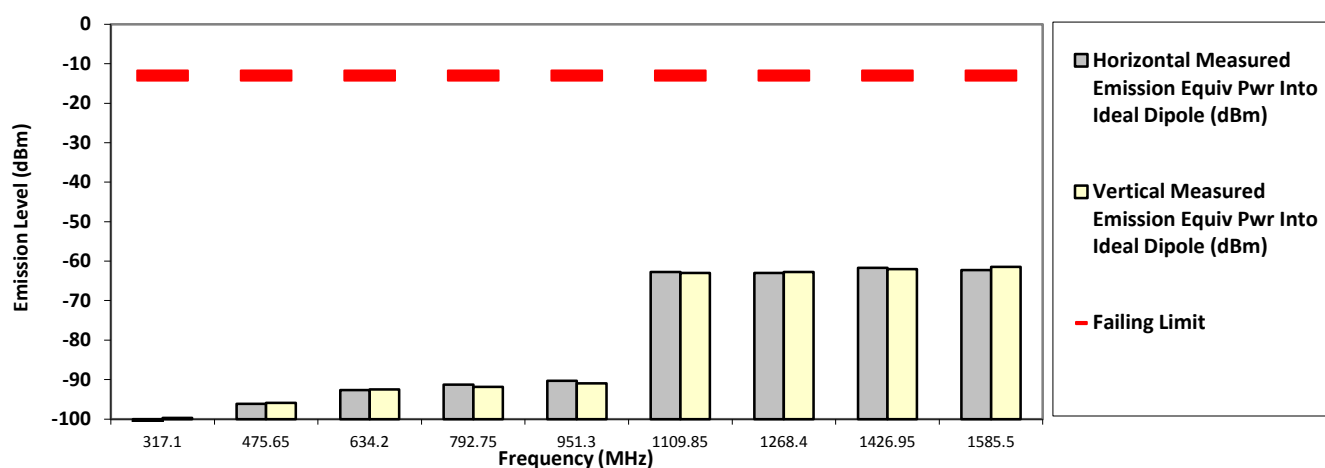

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:


Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Analog
158.550000 MHz

S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1

25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-101.2983 **	-100.6812 **
475.6500	-13.0000	-95.6142 **	-96.3711 **
634.2000	-13.0000	-93.8090 **	-92.8527 **
792.7500	-13.0000	-91.5741 **	-91.8335 **
951.3000	-13.0000	-90.2149 **	-90.3348 **
1109.8500	-13.0000	-62.4187 **	-62.2790 **
1268.4000	-13.0000	-62.1402 **	-63.3946 **
1426.9500	-13.0000	-62.6082 **	-63.1138 **
1585.5000	-13.0000	-61.7300 **	-62.3648 **

RADIATED SPURIOUS EMISSIONS

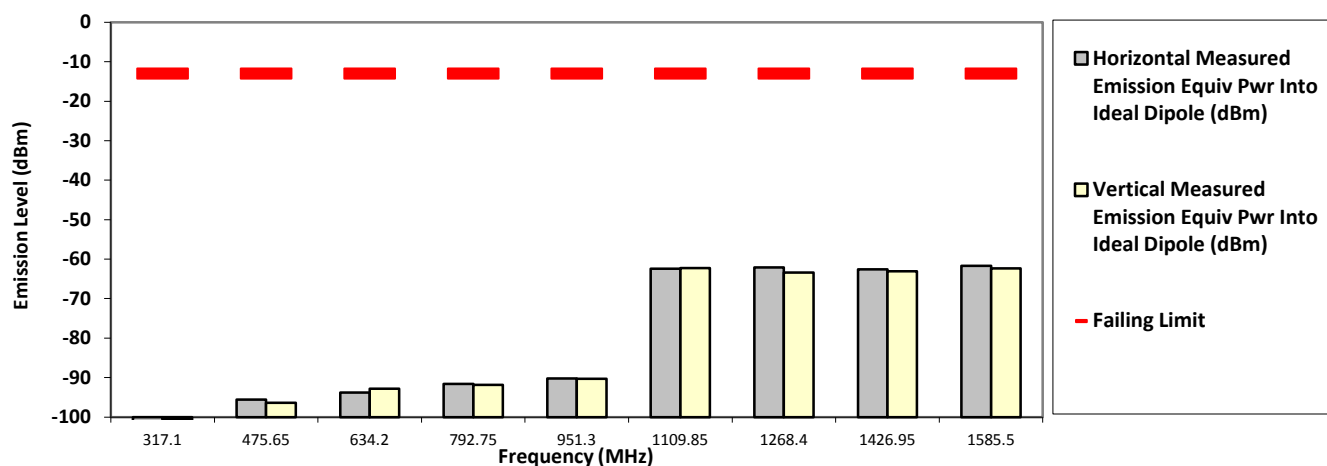

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Analog
158.550000 MHz

S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1

25 kHz **60.000 Watt(s) /Max Power**

[illegible]

Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)

Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)

Failing Limit

Frequency (MHz)	Horizontal Measured (dBm)	Vertical Measured (dBm)
317.1	-100	-100
475.65	-95	-95
634.2	-92	-92
792.75	-92	-90
951.3	-90	-90
1109.85	-65	-65
1268.4	-65	-65
1426.95	-65	-65
1585.5	-65	-65

Sun, Oct 02, 2016

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission


Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Analog
161.700000 MHz

S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1

20 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-100.9968 **	-99.3099 **
485.1000	-13.0000	-95.7832 **	-96.0599 **
646.8000	-13.0000	-93.5823 **	-92.7827 **
808.5000	-13.0000	-91.2525 **	-91.3891 **
970.2000	-13.0000	-90.0695 **	-90.8404 **
1131.9000	-13.0000	-62.4750 **	-63.2824 **
1293.6000	-13.0000	-61.2863 **	-61.9510 **
1455.3000	-13.0000	-61.7348 **	-62.7005 **
1617.0000	-13.0000	-62.6502 **	-62.0933 **

RADIATED SPURIOUS EMISSIONS

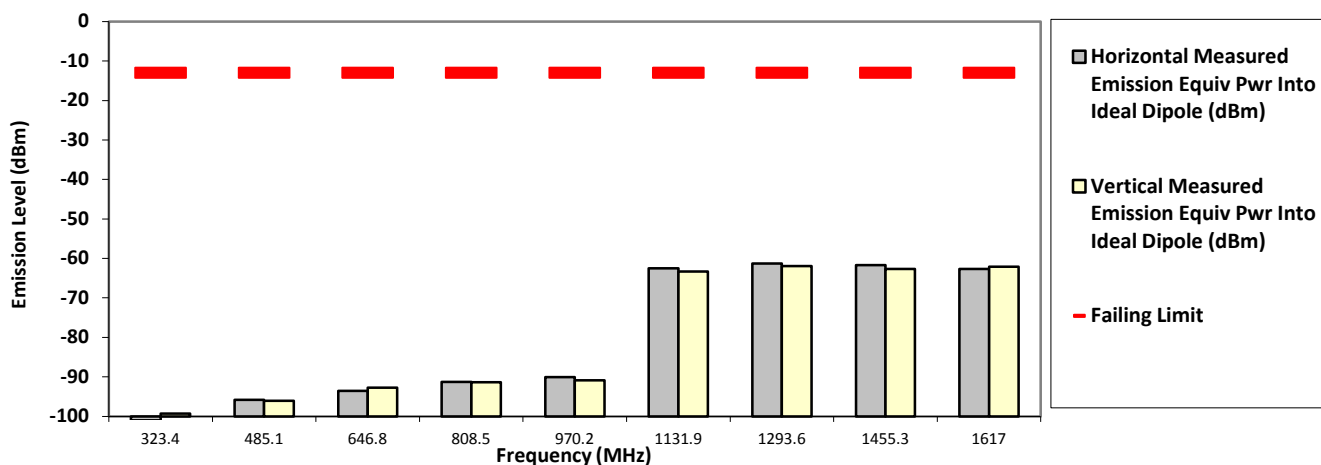

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model #: M22KSS9PW1AN

S/N: 471CSP1670

Battery Part No: NA

Accy Part No: 7175-RMN5070A-

Test Mode: TX Analog


161.700000 MHz

20 kHz

60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-101.1397 **	-99.2662 **
485.1000	-13.0000	-96.1858 **	-95.2280 **
646.8000	-13.0000	-93.1024 **	-92.9309 **
808.5000	-13.0000	-91.6519 **	-91.4913 **
970.2000	-13.0000	-89.4100 **	-89.0634 **
1131.9000	-13.0000	-62.1267 **	-61.6922 **
1293.6000	-13.0000	-62.7698 **	-62.6905 **
1455.3000	-13.0000	-62.2174 **	-63.7402 **
1617.0000	-13.0000	-62.2354 **	-61.8614 **

RADIATED SPURIOUS EMISSIONS

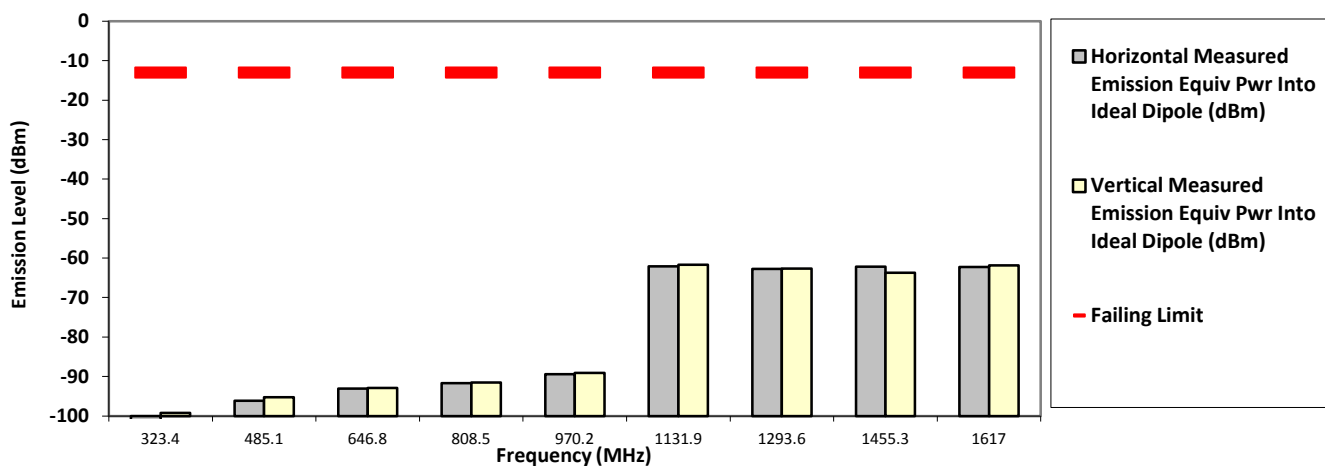

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:


Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Analog
161.700000 MHz

S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1

25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-100.9632 **	-100.1888 **
485.1000	-13.0000	-95.6020 **	-97.0571 **
646.8000	-13.0000	-93.4260 **	-93.9494 **
808.5000	-13.0000	-90.1768 **	-91.9509 **
970.2000	-13.0000	-89.9332 **	-90.0559 **
1131.9000	-13.0000	-62.9508 **	-63.2511 **
1293.6000	-13.0000	-62.6470 **	-62.2491 **
1455.3000	-13.0000	-62.5885 **	-62.5629 **
1617.0000	-13.0000	-61.8366 **	-62.6883 **

RADIATED SPURIOUS EMISSIONS

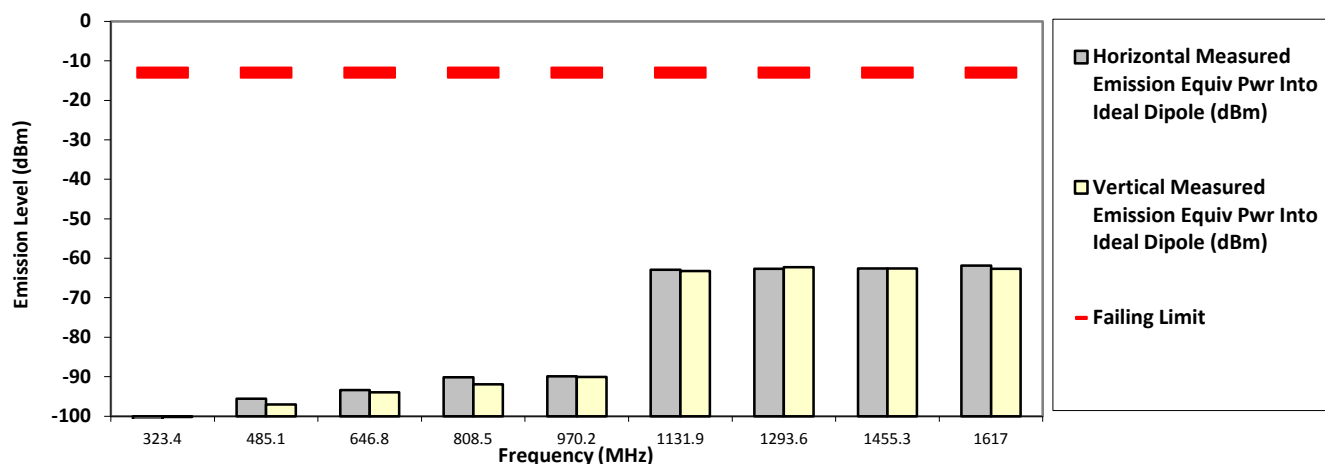

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results

Marginal Results

Failed Results

SAC Transmitter Radiated Emission:


Model #: M22KSS9PW1AN
 Battery Part No: NA
 Test Mode: TX Analog
 161.700000 MHz

S/N: 471CSP1670
 Accy Part No: 7175-RMN5070A-1

25 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-99.5091 **	-101.0128 **
485.1000	-13.0000	-95.6379 **	-94.9126 **
646.8000	-13.0000	-93.1862 **	-92.8075 **
808.5000	-13.0000	-91.0280 **	-90.7985 **
970.2000	-13.0000	-90.2736 **	-88.8959 **
1131.9000	-13.0000	-62.5692 **	-63.2658 **
1293.6000	-13.0000	-62.3812 **	-63.4721 **
1455.3000	-13.0000	-63.3701 **	-63.6516 **
1617.0000	-13.0000	-62.6392 **	-62.1997 **

RADIATED SPURIOUS EMISSIONS

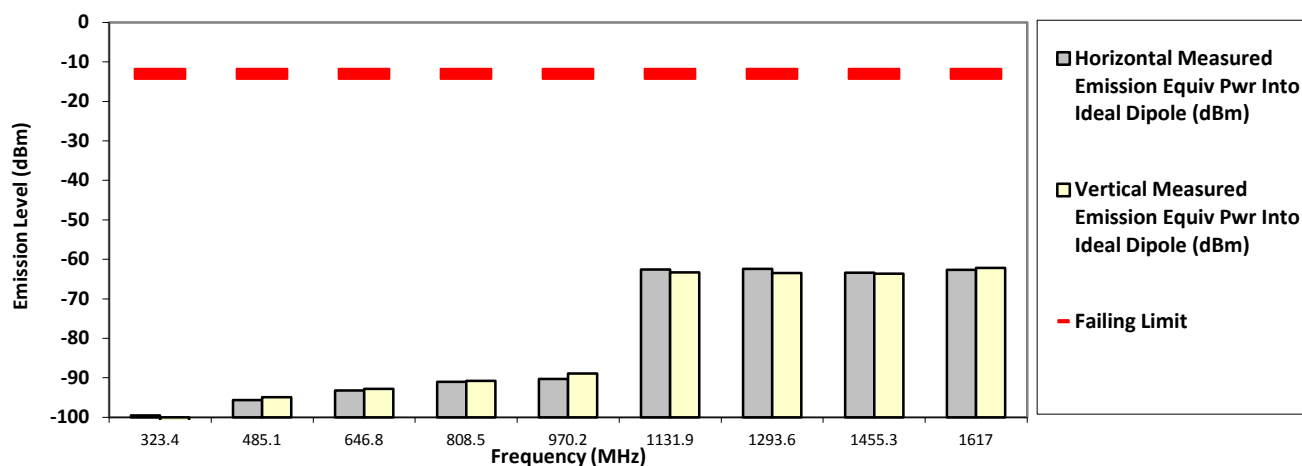

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX C4FM
158.550000 MHz

SAC Transmitter Radiated Emission:

S/N: 471CSP1670


Accy Part No: 7175-RMN5070A-1

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-100.8472 **	-100.4332 **
475.6500	-20.0000	-96.0961 **	-96.1967 **
634.2000	-20.0000	-92.0968 **	-94.5593 **
792.7500	-20.0000	-90.9973 **	-92.2536 **
951.3000	-20.0000	-88.7679 **	-89.2885 **
1109.8500	-20.0000	-63.0015 **	-62.5757 **
1268.4000	-20.0000	-62.3962 **	-62.9567 **
1426.9500	-20.0000	-62.5856 **	-62.3020 **
1585.5000	-20.0000	-62.4535 **	-61.7641 **

RADIATED SPURIOUS EMISSIONS

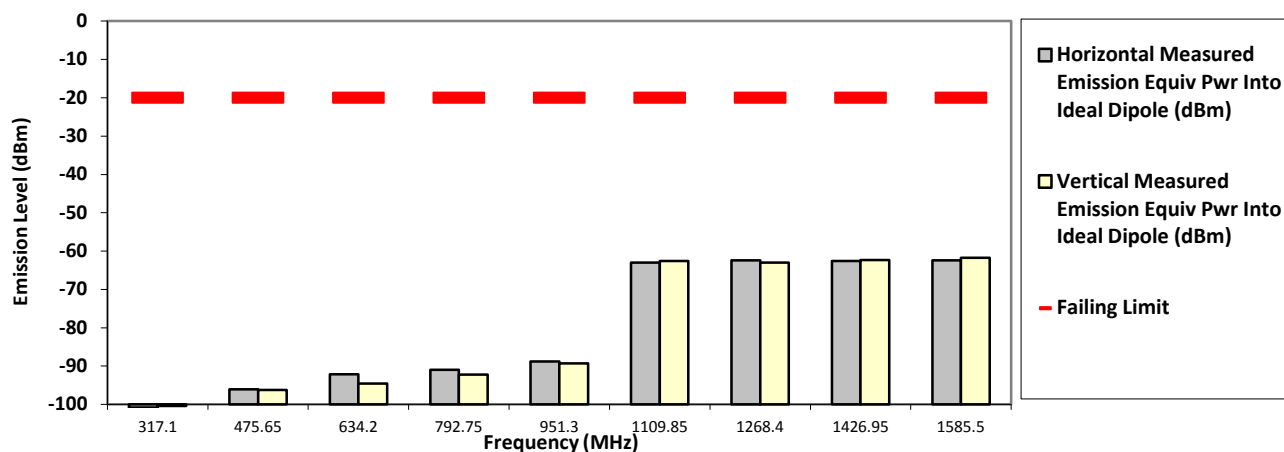

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX C4FM
158.550000 MHz

SAC Transmitter Radiated Emission:

S/N: 471CSP1670


Accy Part No: 7175-RMN5070A-1

12.5 kHz

60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-98.9540 **	-100.9799 **
475.6500	-20.0000	-96.3491 **	-96.4905 **
634.2000	-20.0000	-92.7424 **	-93.0451 **
792.7500	-20.0000	-91.8521 **	-90.6399 **
951.3000	-20.0000	-90.2032 **	-89.3992 **
1109.8500	-20.0000	-62.9644 **	-63.1158 **
1268.4000	-20.0000	-62.9889 **	-61.6669 **
1426.9500	-20.0000	-62.2681 **	-62.9725 **
1585.5000	-20.0000	-62.3366 **	-62.5677 **

RADIATED SPURIOUS EMISSIONS

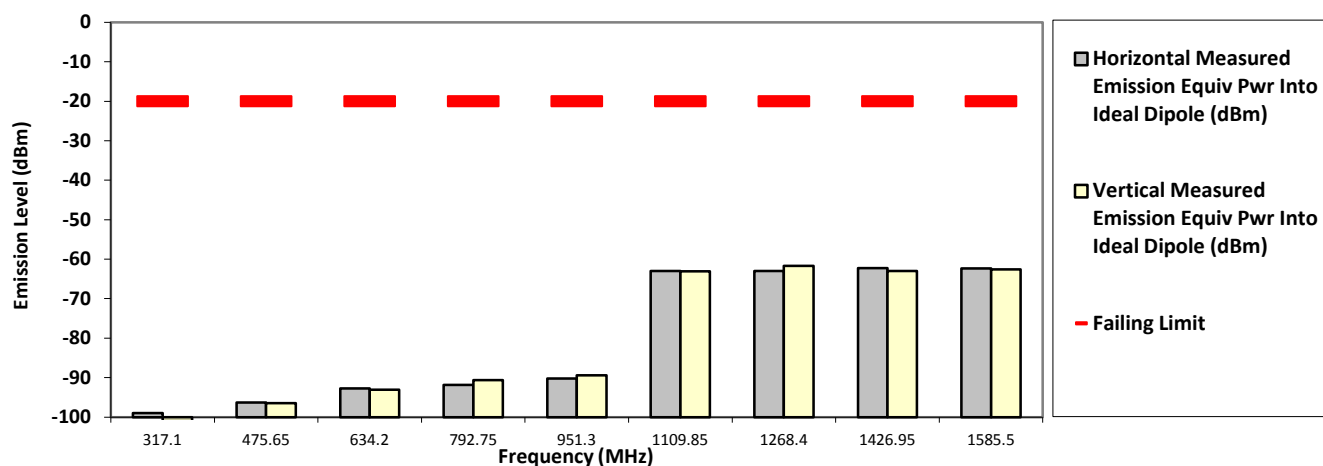

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results


Marginal Results

Failed Results

SAC Transmitter Radiated Emission:
Model #: M22KSS9PW1AN S/N: 471CSP1670
Battery Part No: NA Accy Part No: 7175-RMN5070A-1
Test Mode: TX C4FM
161.700000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-101.7883 **	-100.4228 **
485.1000	-20.0000	-96.2848 **	-96.4931 **
646.8000	-20.0000	-93.3250 **	-93.6044 **
808.5000	-20.0000	-92.1757 **	-91.6993 **
970.2000	-20.0000	-89.5001 **	-89.7286 **
1131.9000	-20.0000	-62.8798 **	-62.4446 **
1293.6000	-20.0000	-60.5340 **	-62.3485 **
1455.3000	-20.0000	-63.4315 **	-63.0692 **
1617.0000	-20.0000	-62.2965 **	-61.9072 **

RADIATED SPURIOUS EMISSIONS

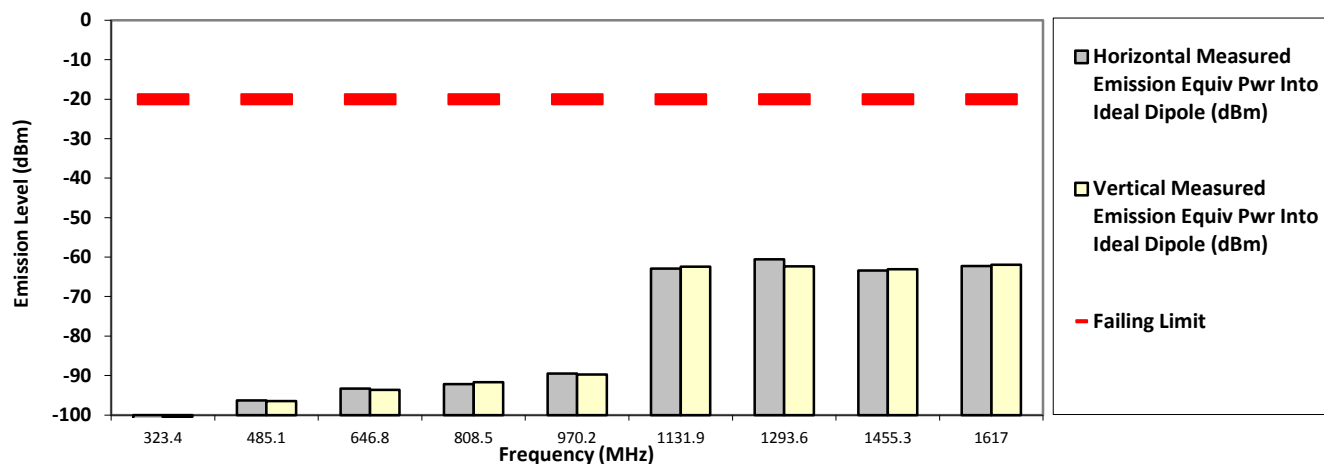

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX C4FM
161.700000 MHz

SAC Transmitter Radiated Emission:
S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1
12.5 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-99.9374 **	-98.4746 **
485.1000	-20.0000	-95.6835 **	-95.8970 **
646.8000	-20.0000	-93.2840 **	-92.8619 **
808.5000	-20.0000	-91.8070 **	-91.7624 **
970.2000	-20.0000	-88.6231 **	-90.0746 **
1131.9000	-20.0000	-63.4284 **	-62.6865 **
1293.6000	-20.0000	-62.7503 **	-63.1717 **
1455.3000	-20.0000	-62.5826 **	-63.0457 **
1617.0000	-20.0000	-63.2393 **	-61.2966 **

RADIATED SPURIOUS EMISSIONS

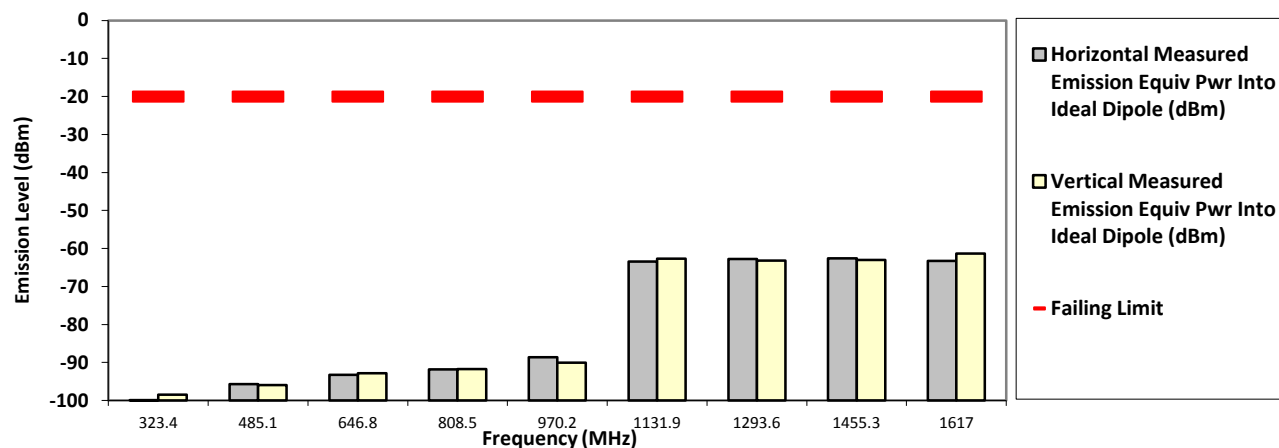

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: M22KSS9PW1AN
 Battery Part No: NA
 Test Mode: TX Phase II
 158.550000 MHz

SAC Transmitter Radiated Emission:
 S/N: 471CSP1670
 Accy Part No: 7175-RMN5070A-1
 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-100.5052 **	-99.7197 **
475.6500	-20.0000	-96.5111 **	-96.6307 **
634.2000	-20.0000	-92.6119 **	-92.6769 **
792.7500	-20.0000	-90.9515 **	-92.5327 **
951.3000	-20.0000	-90.7420 **	-90.1215 **
1109.8500	-20.0000	-62.3536 **	-62.1892 **
1268.4000	-20.0000	-62.1612 **	-62.4296 **
1426.9500	-20.0000	-62.6041 **	-62.0800 **
1585.5000	-20.0000	-62.1913 **	-62.5318 **

RADIATED SPURIOUS EMISSIONS

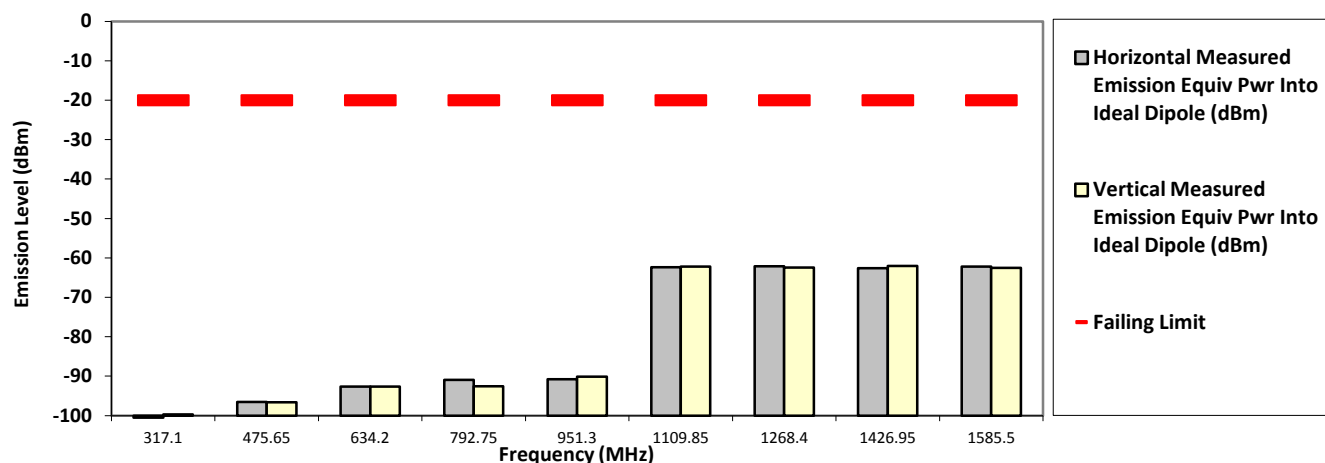

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman
 FCC Registration: 772092
 Industry Canada: 109AK

Sun, Oct 02, 2016

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results

Marginal Results


Failed Results

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Phase II
158.550000 MHz

SAC Transmitter Radiated Emission:
S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1
12.5 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-100.6077 **	-100.4838 **
475.6500	-20.0000	-95.6189 **	-96.3070 **
634.2000	-20.0000	-93.6060 **	-92.1566 **
792.7500	-20.0000	-90.1940 **	-91.4747 **
951.3000	-20.0000	-90.3962 **	-87.6231 **
1109.8500	-20.0000	-62.3700 **	-62.4170 **
1268.4000	-20.0000	-62.6423 **	-62.3759 **
1426.9500	-20.0000	-62.6189 **	-63.3638 **
1585.5000	-20.0000	-62.3911 **	-61.4013 **

RADIATED SPURIOUS EMISSIONS

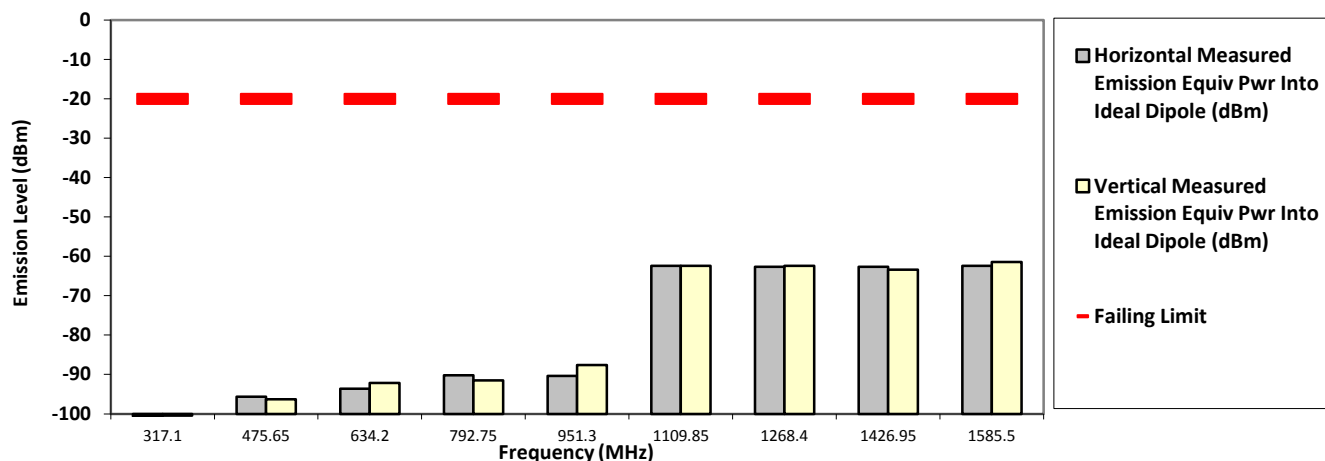

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results

Marginal Results


Failed Results

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Phase II
161.700000 MHz

SAC Transmitter Radiated Emission:
S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1
12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-100.5279 **	-98.9933 **
485.1000	-20.0000	-96.3372 **	-96.0353 **
646.8000	-20.0000	-91.9769 **	-93.5993 **
808.5000	-20.0000	-91.3580 **	-92.0670 **
970.2000	-20.0000	-90.3067 **	-90.2028 **
1131.9000	-20.0000	-63.0057 **	-63.2043 **
1293.6000	-20.0000	-62.3241 **	-62.0146 **
1455.3000	-20.0000	-62.0689 **	-62.6128 **
1617.0000	-20.0000	-62.5298 **	-61.8016 **

RADIATED SPURIOUS EMISSIONS

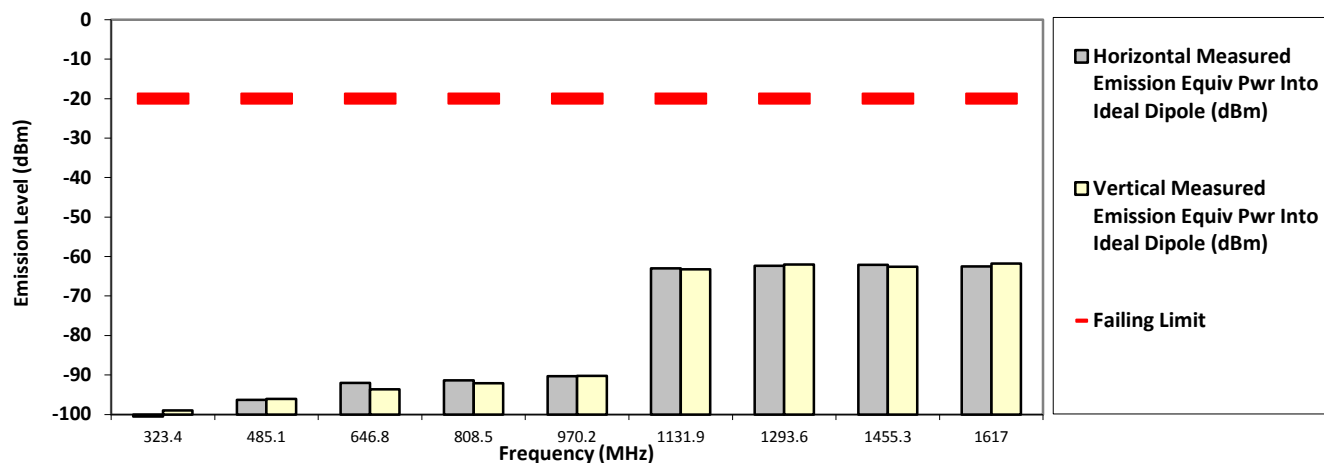

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman

Sun, Oct 02, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model #: M22KSS9PW1AN
Battery Part No: NA
Test Mode: TX Phase II
161.700000 MHz

SAC Transmitter Radiated Emission:
S/N: 471CSP1670
Accy Part No: 7175-RMN5070A-1
12.5 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-100.2422 **	-100.2780 **
485.1000	-20.0000	-95.0608 **	-96.4054 **
646.8000	-20.0000	-92.2577 **	-92.8963 **
808.5000	-20.0000	-92.2369 **	-91.4301 **
970.2000	-20.0000	-89.1560 **	-90.1615 **
1131.9000	-20.0000	-62.1600 **	-62.2629 **
1293.6000	-20.0000	-62.2730 **	-62.3623 **
1455.3000	-20.0000	-62.3071 **	-62.2447 **
1617.0000	-20.0000	-62.5195 **	-61.9647 **

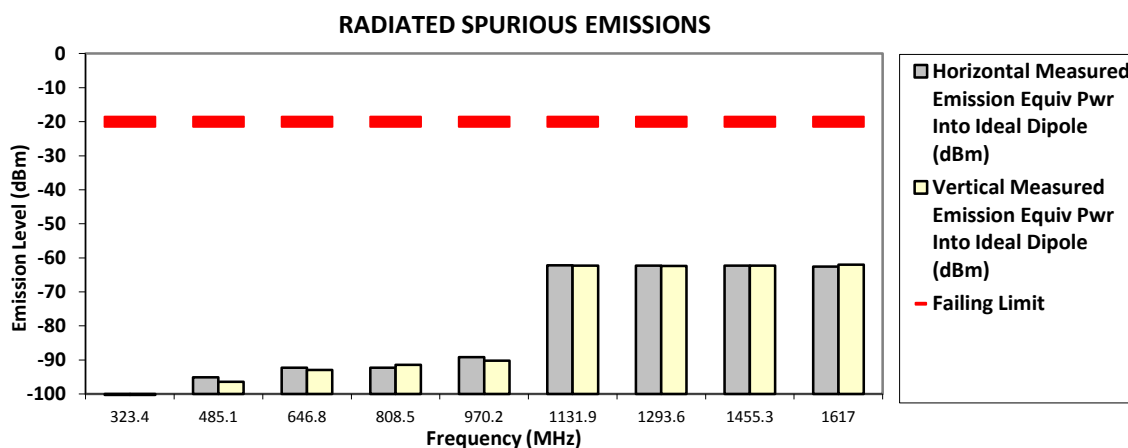

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Aiman
FCC Registration: 772092 Industry Canada: 109AK
Sun, Oct 02, 2016

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.7 Hum(%RH): 69.5

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


6.11.4. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	Not Applicable

6.12. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

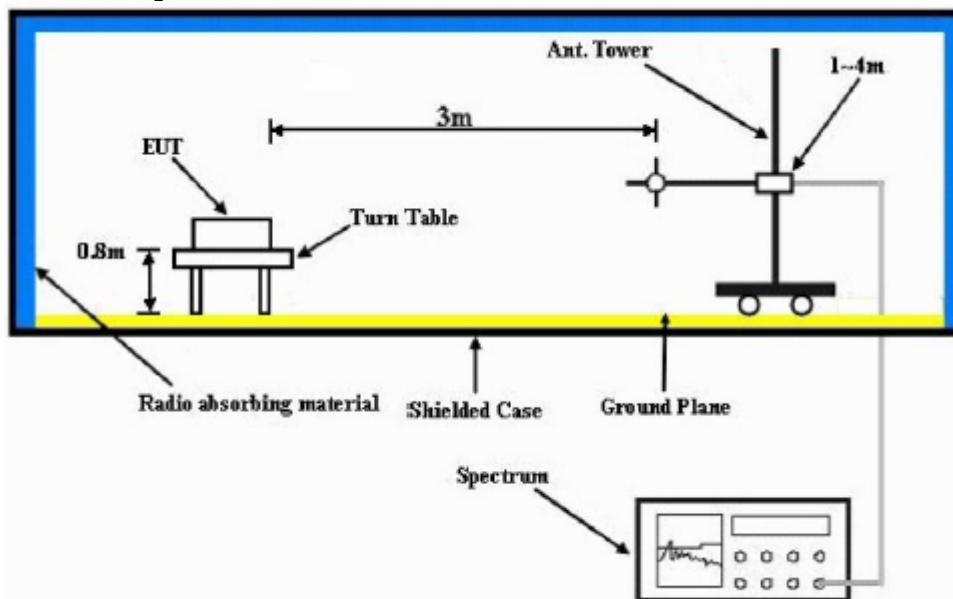

- 1) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100 kHz, VBW = 300 kHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.2. Test Result **Not Applicable**


6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBW). Power is given in terms of effective radiated power (ERP).

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

6.13. AC Power Line Conducted Spur Emissions

6.13.1. Test Setup

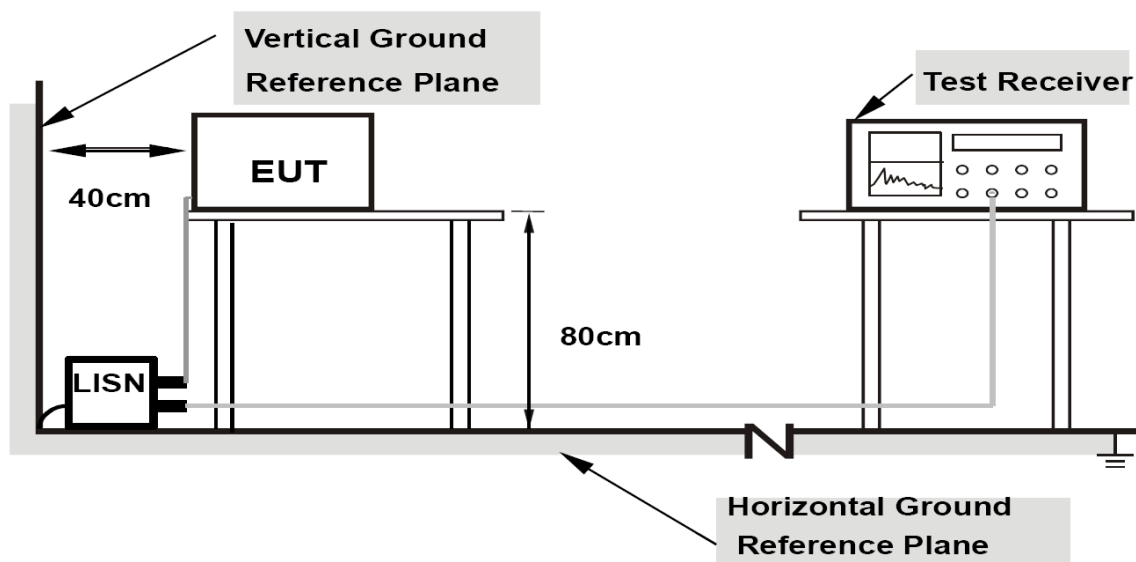

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50 μ H of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30 MHz was measured.

6.13.2. Test Result

Not Applicable

6.13.3. Test Limit

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		